

ETSI TS 138 133 V17.16.0 (2025-02)



**5G;
NR;
Requirements for support of radio resource management
(3GPP TS 38.133 version 17.16.0 Release 17)**



Reference

RTS/TSGR-0438133vhg0

Keywords

5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
[ETSI Search & Browse Standards](#) application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver](#) repository.

Users should be aware that the present document may be revised or have its status changed,
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2025.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by the ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	120
1 Scope	122
2 References	122
3 Definitions, symbols and abbreviations	123
3.1 Definitions	123
3.2 Symbols.....	125
3.3 Abbreviations	126
3.4 Test tolerances	128
3.5 Frequency bands grouping	128
3.5.1 Introduction.....	128
3.5.2 NR operating bands in FR1	128
3.5.2A NR operating bands for satellite access in FR1	129
3.5.3 NR operating bands in FR2	129
3.6 Applicability of requirements in this specification version	130
3.6.1 RRC connected state requirements in DRX.....	131
3.6.2 Number of serving carriers	131
3.6.2.1 Number of serving carriers for SA	131
3.6.2.2 Number of serving carriers for EN-DC	131
3.6.2.3 Number of serving carriers for NE-DC	131
3.6.2.4 Number of serving carriers for NR-DC.....	132
3.6.3 Applicability for intra-band FR2	132
3.6.4 Applicability for FR2 UE power classes.....	132
3.6.5 Applicability for SDL bands	132
3.6.6 Applicability of requirements for NGEN-DC operation.....	132
3.6.7 Applicability of QCL	132
3.6.9 Applicability of requirements for scheduling availability.....	133
3.6.10 Applicability of requirements for measurement restrictions.....	133
3.6.11 Applicability of requirements for Redcap UEs	133
3.6.11.1 RRC connected state requirements in DRX	133
3.6.11.2 Applicability for FR2 Redcap UE power classes	133
3.6.11.3 Applicability of QCL	133
3.6.12 Applicability of requirements for Satellite Access	134
3.6.13 Applicability of requirements for FR2.....	134
3.6.14 Applicability of requirements for FR2 Power Class 6	134
3.6.15 Applicability of requirements for per-FR gap.....	134
4 SA: RRC_IDLE state mobility	134
4.1 Cell Selection	134
4.2 Cell Re-selection	135
4.2.1 Introduction.....	135
4.2.2 Requirements	135
4.2.2.1 UE measurement capability	135
4.2.2.2 Measurement and evaluation of serving cell	135
4.2.2.3 Measurements of intra-frequency NR cells.....	137
4.2.2.4 Measurements of inter-frequency NR cells.....	141
4.2.2.5 Measurements of inter-RAT E-UTRAN cells.....	145
4.2.2.6 Maximum interruption in paging reception.....	148
4.2.2.7 General requirements	148
4.2.2.8 Minimum requirement at transitions	149
4.2.2.9 Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion	149
4.2.2.9.1 Introduction	149

4.2.2.9.2	Measurements for UE fulfilling low mobility criterion	149
4.2.2.9.3	Measurements for UE fulfilling not-at-cell edge criterion.....	152
4.2.2.9.4	Measurements for UE fulfilling low mobility and not-at-cell edge criteria.....	154
4.2.2.10	Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion	154
4.2.2.10.1	Introduction	154
4.2.2.10.2	Measurements for UE fulfilling low mobility criterion	154
4.2.2.10.3	Measurements for UE fulfilling not-at-cell edge criterion.....	157
4.2.2.10.4	Measurements for UE fulfilling low mobility and not-at-cell edge criterion	160
4.2.2.11	Measurements of inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion	160
4.2.2.11.1	Introduction	160
4.2.2.11.2	Measurements for UE fulfilling low mobility criterion	160
4.2.2.11.3	Measurements for UE fulfilling with not-at-cell edge criterion	162
4.2.2.11.4	Measurements for UE fulfilling low mobility and not-at-cell edge criterion	164
4.2A	Cell Re-selection when subject to CCA	165
4.2A.1	Introduction.....	165
4.2A.2	Requirements	165
4.2A.2.1	UE measurement capability	165
4.2A.2.2	Measurement and evaluation when subject to CCA on the serving cell	165
4.2A.2.3	Measurements of intra-frequency NR cells when subject to CCA on the serving cell and target cell	166
4.2A.2.4	Measurements of inter-frequency NR cells when subject to CCA on the target cell	168
4.2A.2.5	Measurements of inter-RAT E-UTRAN cells when subject to CCA on the serving cell.....	169
4.2A.2.6	Maximum interruption in paging reception when subject to CCA on the target cell	170
4.2A.2.7	General requirements	170
4.2B	Cell Re-selection for RedCap.....	170
4.2B.1	Introduction.....	170
4.2B.2	Requirements	170
4.2B.2.1	UE measurement capability for RedCap.....	170
4.2B.2.1.1	UE measurement capability for 1 Rx RedCap.....	170
4.2B.2.1.2	UE measurement capability for 2 Rx RedCap.....	171
4.2B.2.2	Measurement and evaluation of serving cell for RedCap UE	171
4.2B.2.3	Measurements of intra-frequency NR cells for RedCap UE	172
4.2B.2.4	Measurements of inter-frequency NR cells for RedCap UE	175
4.2B.2.5	Measurements of inter-RAT E-UTRAN cells for RedCap UE	178
4.2B.2.6	Maximum interruption in paging reception for RedCap	180
4.2B.2.7	General requirements for RedCap.....	180
4.2B.2.8	Minimum requirement at transitions	180
4.2B.2.9	Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion for RedCap.....	181
4.2B.2.9.1	Introduction	181
4.2B.2.9.2	Measurements for UE fulfilling stationary criterion.....	182
4.2B.2.9.3	Measurements for a UE fulfilling not-at-cell edge while stationary criterion	184
4.2B.2.9.3A	Measurements for a UE fulfilling stationary and not-at-cell-edge criteria	185
4.2B.2.9.4	Measurements for a UE fulfilling low mobility and stationary criteria	185
4.2B.2.9.5	Measurements for a UE fulfilling low mobility and not-at-cell-edge while stationary criteria	185
4.2B.2.9.6	Measurements for a UE fulfilling not-at-cell edge and not-at-cell edge while stationary criteria.....	185
4.2B.2.9.7	Measurements for a UE fulfilling low mobility and not-at-cell edge criteria and not-at-cell- edge while stationary criteria.....	186
4.2B.2.9.8	Measurements for a UE fulfilling low mobility, not-at-cell edge and stationary criterion	186
4.2B.2.9.9	Measurements for UE fulfilling low mobility criterion	186
4.2B.2.9.10	Measurements for UE fulfilling not-at-cell edge criterion.....	189
4.2B.2.9.11	Measurements for UE fulfilling low mobility and not-at-cell edge criteria.....	191
4.2B.2.10	Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion	192
4.2B.2.10.1	Introduction	192
4.2B.2.10.2	Measurements for UE fulfilling stationary criterion.....	192
4.2B.2.10.3	Measurements for a UE fulfilling not-at-cell edge while stationary criterion	194
4.2B.2.10.3A	Measurements for a UE fulfilling stationary and not-at-cell-edge-criterion.....	195
4.2B.2.10.4	Measurements for a UE fulfilling low mobility and stationary criteria	195

4.2B.2.10.5	Measurements for a UE fulfilling low mobility and not-at-cell-edge while stationary criteria	196
4.2B.2.10.6	Measurements for a UE fulfilling not-at-cell edge and not-at-cell edge while stationary criteria.....	196
4.2B.2.10.7	Measurements for a UE fulfilling low mobility and not-at-cell edge criteria and not-at-cell- edge while stationary criteria.....	196
4.2B.2.10.8	Measurements for a UE fulfilling low mobility, not-at-cell edge and stationary criteria	196
4.2B.2.10.9	Measurements for UE fulfilling low mobility criterion	197
4.2B.2.10.10	Measurements for UE fulfilling not-at-cell edge criterion.....	199
4.2B.2.10.11	Measurements for UE fulfilling low mobility and not-at-cell edge criterion	202
4.2B.2.11	Measurements of inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion	202
4.2B.2.11.1	Introduction	202
4.2B.2.11.2	Measurements for UE fulfilling stationary criterion.....	202
4.2B.2.11.3	Measurements for a UE not-at-cell edge while stationary criterion	204
4.2B.2.11.3A	Measurements for a UE fulfilling stationary and not-at-cell-edge criterion	204
4.2B.2.11.4	Measurements for a UE fulfilling low mobility and stationary criteria	205
4.2B.2.11.5	Measurements for a UE fulfilling low mobility and stationary not-at-cell-edge while stationary criteria	205
4.2B.2.11.6	Measurements for a UE fulfilling not-at-cell edge and not-at-cell edge while stationary criteria.....	205
4.2B.2.11.7	Measurements for a UE fulfilling low mobility and not-at-cell edge criteria and not-at-cell- edge while stationary criteria.....	205
4.2B.2.11.8	Measurements for a UE fulfilling low mobility, not-at-cell edge and stationary criteria	205
4.2B.2.11.9	Measurements for UE fulfilling low mobility criterion	206
4.2B.2.11.10	Measurements for UE fulfilling with not-at-cell edge criterion	207
4.2B.2.11.11	Measurements for UE fulfilling low mobility and not-at-cell edge criterion	208
4.2C	Cell Re-selection for NR UE for Satellite Access	209
4.2C.1	Introduction.....	209
4.2C.2	Requirements	209
4.2C.2.1	UE measurement capability	209
4.2C.2.2	Measurement and evaluation of serving cell	209
4.2C.2.3	Measurements of intra-frequency NR cells.....	210
4.2C.2.4	Measurements of inter-frequency NR cells.....	213
4.2C.2.5	Maximum interruption in paging reception.....	216
4.2C.2.6	Minimum requirement at transitions	216
4.2C.2.7	Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion	216
4.2C.2.8	Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion	216
4.2C.2.9	General requirements	217
4.3	Minimization of Drive Tests (MDT)	217
4.3.1	Introduction.....	217
4.3.2	Measurement Requirements.....	217
4.3.3	Requirements for Relative Time Stamp Accuracy.....	218
4.3.4	Requirements for Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting	218
4.3.5	Requirements for Relative Time Stamp Accuracy for Radio Link Failure and Handover Failure Log Reporting	218
4.3C	Minimization of Drive Tests (MDT) for Satellite Access	218
4.3C.1	Introduction.....	218
4.3C.2	Measurement Requirements.....	219
4.3C.3	Requirements for Relative Time Stamp Accuracy.....	219
4.3C.4	Requirements for Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting	219
4.3C.5	Requirements for Relative Time Stamp Accuracy for Radio Link Failure and Handover Failure Log Reporting	220
4.4	Idle Mode CA/DC Measurements	220
4.4.1	Introduction.....	220
4.4.2	Measurement Requirements.....	220
4.4.2.1	Detected cell requirement during state transition and Idle mode	220
4.4.2.2	Measurements of inter-frequency CA/DC candidate cells	221
4.4.2.3	Measurements on serving cell	222

4.4.2.4	Measurements of E-UTRAN inter-RAT DC candidate cells	222
5	SA: RRC_INACTIVE state mobility	223
5.1	Cell Re-selection	223
5.1.1	Introduction.....	223
5.1.2	Requirements	223
5.1.2.1	UE measurement capability	223
5.1.2.2	Measurement and evaluation of serving cell	223
5.1.2.3	Measurements of intra-frequency NR cells.....	224
5.1.2.4	Measurements of inter-frequency NR cells.....	225
5.1.2.5	Measurements of inter-RAT E-UTRAN cells.....	226
5.1.2.6	Maximum interruption in paging reception.....	226
5.1.2.7	General requirements	226
5.1.2.8	Minimum requirement at transitions	227
5.1.2.9	Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion	227
5.1.2.10	Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion	228
5.1.2.11	Measurements of inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion	229
5.1A	Cell Re-selection with CCA	229
5.1A.1	Introduction.....	229
5.1A.2	Requirements	229
5.1A.2.1	UE measurement capability	229
5.1A.2.2	Measurement and evaluation when CCA is used on the serving cell.....	229
5.1A.2.3	Measurements of intra-frequency NR cells when CCA is used on the serving cell and target cell.....	230
5.1A.2.4	Measurements of inter-frequency NR cells when CCA is used on the target cell.....	230
5.1A.2.5	Measurements of inter-RAT E-UTRAN cells when CCA is used on the serving cell.....	230
5.1A.2.6	Maximum interruption in paging reception when CCA is used on the target cell	230
5.1A.2.7	General requirements	230
5.1B	Cell Re-selection for RedCap.....	230
5.1B.1	Introduction.....	230
5.1B.2	Requirements	230
5.1B.2.1	UE measurement capability	230
5.1B.2.2	Measurement and evaluation of serving cell	230
5.1B.2.3	Measurements of intra-frequency NR cells.....	231
5.1B.2.4	Measurements of inter-frequency NR cells.....	232
5.1B.2.5	Measurements of inter-RAT E-UTRAN cells.....	233
5.1B.2.6	Maximum interruption in paging reception.....	233
5.1B.2.7	General requirements	233
5.1B.2.8	Minimum requirement at transitions	233
5.1B.2.9	Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion	234
5.1B.2.10	Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion	234
5.1B.2.11	Measurements of inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion	235
5.1C	Cell Re-selection	236
5.1C.1	Introduction.....	236
5.1C.2	Requirements	236
5.1C.2.1	UE measurement capability	236
5.1C.2.2	Measurement and evaluation of serving cell	236
5.1C.2.3	Measurements of intra-frequency NR cells.....	236
5.1C.2.4	Measurements of inter-frequency NR cells.....	237
5.1C.2.5	Maximum interruption in paging reception.....	237
5.1C.2.6	General requirements	237
5.2	Void.....	237
5.2B	Configured Grant based Small Data Transmissions (CG-SDT) for RedCap.....	237
5.2B.1	Introduction.....	237
5.2B.2	Requirements on UE synchronization for small data transmissions for RedCap.....	237
5.2B.2.1	Void.....	237
5.2B.3	TA validation requirements for RedCap	237

5.2B.3.1	Void.....	238
5.2B.3.2	Void.....	238
5.2B.4	Scheduling restriction	238
5.2B.5	Applicability conditions for CG-SDT for RedCap	239
5.3	Minimization of Drive Tests (MDT)	239
5.3.1	Introduction.....	239
5.3.2	Measurement Requirements.....	239
5.3.3	Requirements for Relative Time Stamp Accuracy.....	239
5.3.4	Requirements for Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting	239
5.3.5	Requirements for Relative Time Stamp Accuracy for Radio Link Failure and Handover Failure Log Reporting	239
5.3.6	Requirements for Relative Time Stamp Accuracy for RRC Resume Failure Log Reporting.....	240
5.3C	Minimization of Drive Tests (MDT) for Satellite Access	240
5.3C.1	Introduction.....	240
5.3C.2	Measurement Requirements.....	240
5.3C.3	Requirements for Relative Time Stamp Accuracy.....	240
5.3C.4	Requirements for Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting	240
5.3C.5	Requirements for Relative Time Stamp Accuracy for Radio Link Failure and Handover Failure Log Reporting	240
5.3C.6	Requirements for Relative Time Stamp Accuracy for RRC Resume Failure Log Reporting.....	241
5.4	Inactive Mode CA/DC Measurements	241
5.4.1	Introduction.....	241
5.4.2	Measurement Requirements.....	241
5.4.2.1	Detected cell requirement during state transition and inactive mode.....	241
5.4.2.2	Measurements of inter-frequency CA/DC candidate cells	241
5.4.2.3	Measurements on serving cell	241
5.4.2.4	Measurements on E-UTRAN inter-RAT DC candidate cells	241
5.5	Configured Grant based Small Data Transmissions (CG-SDT).....	241
5.5.1	Introduction.....	241
5.5.2	Requirements on UE synchronization for small data transmissions	241
5.5.3	TA validation requirements	242
5.5.4	Scheduling restriction	243
5.5.4.1	Scheduling availability of UE performing measurements in TDD bands on FR1	243
5.5.4.2	Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1.....	243
5.5.4.3	Scheduling availability of UE performing measurements on FR2.....	243
5.5.5	Applicability conditions for SDT.....	244
5.6	NR measurements for positioning	244
5.6.1	Introduction.....	244
5.6.2	RSTD measurements	245
5.6.2.1	Introduction.....	245
5.6.2.2	Requirements Applicability.....	245
5.6.2.3	Measurement Capability	245
5.6.2.5	Measurements Period Requirements	245
5.6.3	PRS-RSRP measurements	248
5.6.3.1	Introduction.....	248
5.6.3.2	Requirements applicability.....	248
5.6.3.3	Measurement Capability	248
5.6.3.4	Measurement Reporting Requirements.....	248
5.6.3.5	Measurement Period Requirements	249
5.6.4	UE Rx-Tx time difference measurements.....	251
5.6.4.1	Introduction.....	251
5.6.4.2	Requirements Applicability.....	251
5.6.4.3	Measurement Capability	251
5.6.4.4	Measurement Reporting Requirements.....	251
5.6.4.5	Measurement Period Requirements	252
5.6.5	PRS-RSRPP measurements	255
5.6.5.1	Introduction.....	255
5.6.5.2	Requirements Applicability.....	255
5.6.5.3	Measurement Capability	255

5.6.5.4	Measurement Reporting Requirements	255
5.6.5.5	Measurement Period Requirements	255
5.7	Random access based Small Data Transmissions (RA-SDT)	256
5.7.1	Introduction.....	256
5.7.2	Requirements for small data transmissions based on 2-step RA	257
5.7.3	Requirements for small data transmissions based on 4-step RA	257
5.7.4	Applicability conditions for SDT.....	257
5.7B	Random access based Small Data Transmissions (RA-SDT) for RedCap	257
5.7B.1	Introduction.....	257
5.7B.2	Requirements for small data transmissions based on 2-step RA	257
5.7B.3	Requirements for small data transmissions based on 4-step RA	257
5.7B.4	Applicability conditions for RA-SDT for RedCap	257
6	RRC_CONNECTED state mobility	258
6.1	Handover	258
6.1.1	NR Handover	258
6.1.1.1	Introduction.....	258
6.1.1.2	NR FR1 - NR FR1 Handover.....	258
6.1.1.2.1	Handover delay.....	258
6.1.1.2.2	Interruption time	258
6.1.1.3	NR FR2- NR FR1 Handover	259
6.1.1.3.1	Handover delay.....	259
6.1.1.3.2	Interruption time	259
6.1.1.4	NR FR2- NR FR2 Handover	260
6.1.1.4.1	Handover delay.....	260
6.1.1.4.2	Interruption time	260
6.1.1.5	NR FR1- NR FR2 Handover	261
6.1.1.5.1	Handover delay.....	261
6.1.1.5.2	Interruption time	261
6.1.2	NR Handover to other RATs	262
6.1.2.1	NR – E-UTRAN Handover	262
6.1.2.1.1	Introduction	262
6.1.2.1.2	Handover delay.....	262
6.1.2.1.3	Interruption time	262
6.1.2.2	NR – UTRAN Handover.....	263
6.1.2.2.1	Introduction.....	263
6.1.2.2.2	Handover delay.....	263
6.1.2.2.3	Interruption time	263
6.1.3	NR DAPS Handover	264
6.1.3.1	Introduction.....	264
6.1.3.2	NR FR1 - NR FR1 DAPS Handover.....	264
6.1.3.2.1	DAPS handover delay	264
6.1.3.2.2	Interruption time	265
6.1.3.3	NR FR2- NR FR1 DAPS Handover.....	267
6.1.3.3.1	DAPS handover delay	267
6.1.3.3.2	Interruption time	267
6.1.3.4	NR FR1- NR FR2 DAPS Handover.....	268
6.1.3.4.1	DAPS handover delay	268
6.1.3.4.2	Interruption time	268
6.1.4	NR Conditional Handover	269
6.1.4.1	Introduction.....	269
6.1.4.2	NR FR1 – NR FR1 conditional handover	269
6.1.4.3	NR FR2 – NR FR1 conditional handover	270
6.1.4.4	NR FR2 – NR FR2 conditional handover	270
6.1.4.4.1	Handover delay.....	270
6.1.4.4.2	Measurement time	271
6.1.4.4.3	Preparation time.....	271
6.1.4.4.4	Interruption time	271
6.1.4.5	NR FR1 – NR FR2 conditional handover	272
6.1.5	NR Handover with PSCell	272
6.1.5.1	Introduction.....	272
6.1.5.2	Handover with PSCell from NR SA to EN-DC	272

6.1.5.2.1	Interruption time for inter-RAT HO from NR to E-UTRAN	272
6.1.5.2.2	PSCell addition in HO with PSCell for NR SA to EN-DC.....	273
6.1.5.3	HO with PSCell from NE-DC to NE-DC.....	273
6.1.5.3.1	Handover delay.....	273
6.1.5.3.2	HO with PSCell - PCell Interruption time	274
6.1.5.3.3	PSCell addition/change in NE-DC to NE-DC HO with PSCell	274
6.1.5.4	HO with PSCell from NR-DC to NR-DC	274
6.1.5.5	Handover with PSCell from NR SA to EN-DC with PSCell using CCA	276
6.1.5.5.1	Introduction	276
6.1.5.5.2	NR SA to EN-DC HO with PSCell- NR to E-UTRA HO Interruption time	276
6.1.5.5.3	NR SA to EN-DC HO with PSCell - NR PSCell Addition Delay requirements	276
6.1A	Void.....	277
6.1A.1	Void	277
6.1A.1.1	Void.....	277
6.1A.1.2	Void.....	277
6.1A.1.2.1	Void	277
6.1A.1.2.2	Void	277
6.1B	Handover to target cell using CCA.....	278
6.1B.1	NR Handover	278
6.1B.1.1	Introduction.....	278
6.1B.1.2	NR FR1 - NR FR1 Handover	278
6.1B.1.2.1	Handover delay.....	278
6.1B.1.2.2	Interruption time	278
6.1B.1.3	NR FR2-2 NR FR2-2 Handover.....	279
6.1B.1.3.1	Handover delay.....	279
6.1B.1.3.2	Interruption time	279
6.1B.1.4	NR FR1- NR FR2-2 Handover.....	280
6.1B.1.4.1	Handover delay.....	280
6.1B.1.4.2	Interruption time	280
6.1C	Handover for SAN.....	281
6.1C.1	NR SAN Handover	281
6.1C.1.1	Introduction.....	281
6.1C.1.2	NR SAN FR1 – NR SAN FR1 Handover	281
6.1C.1.2.1	Handover delay.....	282
6.1C.1.2.2	Interruption time	282
6.1C.2	NR SAN Conditional Handover	283
6.1C.2.1	Introduction.....	283
6.1C.2.2	NR SAN FR1 – NR SAN FR1 conditional handover	283
6.1C.2.2.1	Handover delay.....	283
6.1C.2.2.2	Measurement time	283
6.1C.2.2.3	Preparation time.....	284
6.1C.2.2.4	Interruption time	284
6.1D	Handover for RedCap.....	285
6.1D.1	NR Handover	285
6.1D.1.1	Introduction.....	285
6.1D.1.2	NR FR1 - NR FR1 Handover	285
6.1D.1.2.1	Handover delay.....	285
6.1D.1.2.2	Interruption time	286
6.1D.1.3	NR FR2- NR FR2 Handover.....	287
6.1D.1.3.1	Handover delay.....	287
6.1D.1.3.2	Interruption time	287
6.1D.2	NR Handover to other RATs	289
6.1D.2.1	NR – E-UTRAN Handover	289
6.2	RRC Connection Mobility Control.....	289
6.2.1	SA: RRC Re-establishment	289
6.2.1.1	Introduction.....	289
6.2.1.2	Requirements	289
6.2.1.2.1	UE Re-establishment delay requirement	289
6.2.1A	RRC Re-establishment with CCA	291
6.2.1A.1	Introduction.....	291
6.2.1A.2	Requirements	291
6.2.1A.2.1	UE Re-establishment with CCA delay requirement	291

6.2.1B	SA: RRC Re-establishment for RedCap	293
6.2.1B.1	Introduction	293
6.2.1B.2	Requirements	293
6.2.2	Random access	294
6.2.2.1	Introduction	294
6.2.2.2	Requirements for 4-step RA type	294
6.2.2.2.1	Contention based random access	294
6.2.2.2.1.1	Correct behaviour when transmitting Random Access Preamble	294
6.2.2.2.1.2	Correct behaviour when receiving Random Access Response	295
6.2.2.2.1.3	Correct behaviour when not receiving Random Access Response	295
6.2.2.2.1.4	Correct behaviour when receiving an UL grant for msg3 retransmission	295
6.2.2.2.1.5	SA: Correct behaviour when receiving a message over Temporary C-RNTI	295
6.2.2.2.1.6	Correct behaviour when contention Resolution timer expires	295
6.2.2.2.2	Non-Contention based random access	295
6.2.2.2.2.1	Correct behaviour when transmitting Random Access Preamble	295
6.2.2.2.2.2	Correct behaviour when receiving Random Access Response	296
6.2.2.2.2.3	Correct behaviour when not receiving Random Access Response	296
6.2.2.2.3	UE behaviour when configured with supplementary UL	296
6.2.2.3	Requirements for 2-step RA type	296
6.2.2.3.1	Contention based random access	297
6.2.2.3.1.1	Correct behaviour when transmitting MsgA	297
6.2.2.3.1.2	Correct behaviour when receiving MsgB	297
6.2.2.3.1.3	Correct behaviour when not receiving MsgB	297
6.2.2.3.2	Non-Contention based random access	297
6.2.2.3.2.1	Correct behaviour when transmitting MsgA	297
6.2.2.3.2.2	Correct behaviour when receiving MsgB	298
6.2.2.3.2.3	Correct behaviour when not receiving MsgB	298
6.2.2.3.3	UE behaviour when configured with supplementary UL	298
6.2.2A	Random access when CCA is used on target frequency	298
6.2.2A.1	Introduction	298
6.2.2A.2	Requirements for 4-step RA type	298
6.2.2A.2.1	Contention based random access	299
6.2.2A.2.1.1	Correct behaviour when transmitting Random Access Preamble	299
6.2.2A.2.1.2	Correct behaviour when receiving Random Access Response	299
6.2.2A.2.1.3	Correct behaviour when not receiving Random Access Response	299
6.2.2A.2.1.4	Correct behaviour when receiving an UL grant for msg3 retransmission	299
6.2.2A.2.1.6	Correct behaviour when contention Resolution timer expires	300
6.2.2A.2.2	Non-Contention based random access	300
6.2.2A.2.2.1	Correct behaviour when transmitting Random Access Preamble	300
6.2.2A.2.2.2	Correct behaviour when receiving Random Access Response	300
6.2.2A.2.2.3	Correct behaviour when not receiving Random Access Response	301
6.2.2A.3	Requirements for 2-step RA type	301
6.2.2A.3.1	Contention based random access	301
6.2.2A.3.1.1	Correct behaviour when transmitting MsgA	301
6.2.2A.3.1.2	Correct behaviour when receiving MsgB	302
6.2.2A.3.1.3	Correct behaviour when not receiving MsgB	302
6.2.2A.3.2	Non-Contention based random access	302
6.2.2A.3.2.1	Correct behaviour when transmitting MsgA	302
6.2.2A.3.2.2	Correct behaviour when receiving MsgB	303
6.2.2A.3.2.3	Correct behaviour when not receiving MsgB	303
6.2.2B	Random access for RedCap	303
6.2.2B.1	Introduction	303
6.2.2B.2	Requirements	303
6.2.3	SA: RRC Connection Release with Redirection	304
6.2.3.1	Introduction	304
6.2.3.2	Requirements	304
6.2.3.2.1	RRC connection release with redirection to NR	304
6.2.3.2.2	RRC connection release with redirection to E-UTRAN	305
6.2.3.2.3	RRC connection release with redirection to NR carrier subject to CCA	305
6.2.3A	SA: RRC Connection Release with Redirection for RedCap	307
6.2.3A.1	Introduction	307
6.2.3A.2	Requirements	307

6.2.3A.2.1	RRC connection release with redirection to NR.....	307
6.2.3A.2.2	RRC connection release with redirection to E-UTRAN.....	307
6.2C	RRC Connection Mobility Control for Satellite Access.....	307
6.2C.1	SA: RRC Re-establishment for Satellite Access.....	307
6.2C.1.1	Introduction.....	307
6.2C.1.2	Requirements	307
6.2C.1.2.1	UE Re-establishment delay requirement	308
6.2C.2	Random access for satellite access	309
6.2C.2.1	Introduction.....	309
6.2C.2.2	Requirements for 4-step RA type.....	309
6.2C.2.2.1	Contention based random access	309
6.2C.2.2.1.1	Correct behaviour when transmitting Random Access Preamble	309
6.2C.2.2.1.2	Correct behaviour when receiving Random Access Response	310
6.2C.2.2.1.3	Correct behaviour when not receiving Random Access Response	310
6.2C.2.2.1.4	Correct behaviour when receiving an UL grant for msg3 retransmission.....	310
6.2C.2.2.1.5	SA: Correct behaviour when receiving a message over Temporary C-RNTI.....	310
6.2C.2.2.1.6	Correct behaviour when contention Resolution timer expires	310
6.2C.2.2.2	Non-Contention based random access.....	310
6.2C.2.2.2.1	Correct behaviour when transmitting Random Access Preamble	310
6.2C.2.2.2.2	Correct behaviour when receiving Random Access Response	311
6.2C.2.2.2.3	Correct behaviour when not receiving Random Access Response	311
6.2C.2.3	Requirements for 2-step RA type.....	311
6.2C.2.3.1	Contention based random access	312
6.2C.2.3.1.1	Correct behaviour when transmitting MsgA.....	312
6.2C.2.3.1.2	Correct behaviour when receiving MsgB	312
6.2C.2.3.1.3	Correct behaviour when not receiving MsgB	312
6.2C.2.3.2	Non-Contention based random access.....	312
6.2C.2.3.2.1	Correct behaviour when transmitting MsgA.....	312
6.2C.2.3.2.2	Correct behaviour when receiving MsgB	313
6.2C.2.3.2.3	Correct behaviour when not receiving MsgB	313
6.2C.3	SA: RRC Connection Release with Redirection for Satellite Access.....	313
6.2C.3.1	Introduction.....	313
6.2C.3.2	Requirements	313
6.2C.3.2.1	RRC connection release with redirection to NR.....	313
7	Timing	314
7.1	UE transmit timing	314
7.1.1	Introduction.....	314
7.1.2	Requirements	314
7.1.2.1	Gradual timing adjustment.....	316
7.1.2.2	Void.....	317
7.1.2.3	One shot large UL timing adjustment for FR2 Power Class 6 UE.....	317
7.1A	UE transmit timing for RedCap.....	317
7.1A.1	Introduction.....	317
7.1A.2	Requirements	317
7.1A.2.1	Gradual timing adjustment.....	318
7.1C	UE transmit timing for Satellite Access	319
7.1C.1	Introduction.....	319
7.1C.2	Requirements	319
7.1C.2.1	Gradual timing adjustment.....	320
7.2	UE timer accuracy	320
7.2.1	Introduction.....	320
7.2.2	Requirements	320
7.2A	UE timer accuracy for RedCap.....	321
7.2A.1	Introduction.....	321
7.2A.2	Requirements	321
7.2C	UE timer accuracy for satellite access.....	321
7.2C.1	Introduction.....	321
7.2C.2	Requirements	321
7.3	Timing advance	322
7.3.1	Introduction.....	322
7.3.2	Requirements	322

7.3.2.1	Timing Advance adjustment delay.....	322
7.3.2.2	Timing Advance adjustment accuracy	322
7.3A	Timing Advance for RedCap.....	322
7.3A.1	Introduction.....	322
7.3A.2	Requirements	322
7.3A.2.1	Timing Advance adjustment delay.....	322
7.3A.2.2	Timing Advance adjustment accuracy	322
7.3C	Timing advance for satellite access.....	323
7.3C.1	Introduction.....	323
7.3C.2	Requirements	323
7.3C.2.1	Timing Advance adjustment delay.....	323
7.3C.2.2	Timing Advance adjustment accuracy	323
7.4	Cell phase synchronization accuracy.....	323
7.4.1	Definition.....	323
7.4.2	Minimum requirements.....	323
7.5	Maximum Transmission Timing Difference	324
7.5.1	Introduction.....	324
7.5.2	Minimum Requirements for inter-band EN-DC	324
7.5.2.1	Minimum Requirements for inter-band synchronous EN-DC	324
7.5.3	Minimum Requirements for intra-band EN-DC	325
7.5.4	Minimum Requirements for NR Carrier Aggregation	325
7.5.5	Minimum Requirements for inter-band NE-DC	326
7.5.5.1	Minimum Requirements for inter-band synchronous NE-DC	326
7.5.6	Minimum Requirements for inter-band NR DC	327
7.6	Maximum Receive Timing Difference.....	327
7.6.1	Introduction.....	327
7.6.2	Minimum Requirements for inter-band EN-DC	328
7.6.2.1	Minimum Requirements for inter-band synchronous EN-DC	328
7.6.3	Minimum Requirements for intra-band EN-DC	329
7.6.4	Minimum Requirements for NR Carrier Aggregation	329
7.6.5	Minimum Requirements for inter-band NE-DC	330
7.6.5.1	Minimum Requirements for inter-band synchronous NE-DC	330
7.6.6	Minimum Requirements for inter-band NR DC	331
7.7	<i>deriveSSB-IndexFromCell</i> tolerance	331
7.7.1	Minimum requirements.....	331
7.7A	<i>deriveSSB-IndexFromCell</i> tolerance for RedCap	332
7.7A.1	Minimum requirements.....	332
7.8	Void.....	332
7.9	<i>deriveSSB-IndexFromCellInter-r17</i> tolerance.....	332
7.9.1	Minimum requirements.....	332
8	Signalling characteristics.....	333
8.1	Radio Link Monitoring.....	333
8.1.1	Introduction.....	333
8.1.1.1	Introduction of Requirement on Radio Link Monitoring for UE Configured with Relaxed Measurement Criteria	334
8.1.2	Requirements for SSB based radio link monitoring	334
8.1.2.1	Introduction.....	335
8.1.2.2	Minimum requirement	335
8.1.2.3	Measurement restrictions for SSB based RLM.....	339
8.1.2.4	Minimum requirement of SSB based radio link monitoring for UE fulfilling relaxed measurement criteria	339
8.1.3	Requirements for CSI-RS based radio link monitoring	340
8.1.3.1	Introduction.....	340
8.1.3.2	Minimum requirement	341
8.1.3.3	Measurement restrictions for CSI-RS based RLM.....	344
8.1.3.4	Minimum requirement of CSI-RS based radio link monitoring for UE fulfilling relaxed measurement criteria	345
8.1.4	Minimum requirement at transitions.....	346
8.1.5	Minimum requirement for UE turning off the transmitter	346
8.1.6	Minimum requirement for L1 indication	346
8.1.7	Scheduling availability of UE during radio link monitoring.....	346

8.1.7.1	Scheduling availability of UE performing radio link monitoring with a same subcarrier spacing as PDSCH/PDCCH on FR1	347
8.1.7.2	Scheduling availability of UE performing radio link monitoring with a different subcarrier spacing than PDSCH/PDCCH on FR1.....	347
8.1.7.3	Scheduling availability of UE performing radio link monitoring on FR2.....	347
8.1.7.4	Scheduling availability of UE performing radio link monitoring on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR-DC.....	348
8.1A	Radio Link Monitoring with CCA on Target Frequency	348
8.1A.1	Introduction.....	348
8.1A.2	Requirements for SSB Based Radio Link Monitoring.....	349
8.1A.2.1	Introduction.....	349
8.1A.2.2	Minimum Requirement	350
8.1A.3	Minimum requirement at transitions.....	353
8.1A.4	Minimum requirement for UE turning off the transmitter	353
8.1A.5	Minimum requirement for L1 indication	353
8.1A.6	Scheduling availability of UE during radio link monitoring.....	353
8.1A.6.3	Scheduling availability of UE performing radio link monitoring on FR2-2	354
8.1A.6.4	Scheduling availability of UE performing radio link monitoring on FR1 or FR2-2 in case of FR1-FR2-2 inter-band CA and NR-DC	354
8.1B	Radio Link Monitoring for RedCap	355
8.1B.1	Introduction.....	355
8.1B.2	Requirements for SSB based radio link monitoring	356
8.1B.2.1	Introduction.....	356
8.1B.2.2	Minimum requirement	356
8.1B.2.3	Measurement restrictions for SSB based RLM.....	358
8.1B.3	Requirements for CSI-RS based radio link monitoring	359
8.1B.3.1	Introduction.....	359
8.1B.3.2	Minimum requirement	360
8.1B.3.3	Measurement restrictions for CSI-RS based RLM.....	362
8.1B.4	Minimum requirement at transitions.....	363
8.1B.5	Minimum requirement for UE turning off the transmitter	363
8.1B.6	Minimum requirement for L1 indication	363
8.1B.7	Scheduling availability of UE during radio link monitoring.....	363
8.1B.7.1	Scheduling availability of UE performing radio link monitoring with a same subcarrier spacing as PDSCH/PDCCH on FR1	364
8.1B.7.2	Scheduling availability of UE performing radio link monitoring with a different subcarrier spacing than PDSCH/PDCCH on FR1.....	364
8.1B.7.3	Scheduling availability of UE performing radio link monitoring on FR2.....	364
8.1C	Radio Link Monitoring for Satellite Access.....	364
8.1C.1	Introduction.....	364
8.1C.2	Requirements for SSB based radio link monitoring	365
8.1C.2.1	Introduction.....	365
8.1C.2.2	Minimum requirement	366
8.1C.2.3	Measurement restrictions for SSB based RLM.....	367
8.1C.3	Requirements for CSI-RS based radio link monitoring	367
8.1C.3.1	Introduction.....	367
8.1C.3.2	Minimum requirement	368
8.1C.3.3	Measurement restrictions for CSI-RS based RLM.....	369
8.1C.4	Minimum requirement at transitions.....	369
8.1C.5	Minimum requirement for UE turning off the transmitter	370
8.1C.6	Minimum requirement for L1 indication	370
8.1C.7	Scheduling availability of UE during radio link monitoring.....	370
8.1C.7.1	Scheduling availability of UE performing radio link monitoring with a same subcarrier spacing as PDSCH/PDCCH on FR1	370
8.1C.7.2	Scheduling availability of UE performing radio link monitoring with a different subcarrier spacing than PDSCH/PDCCH on FR1.....	370
8.2	Interruption.....	371
8.2.1	EN-DC Interruption	371
8.2.1.1	Introduction.....	371
8.2.1.2	Requirements	372
8.2.1.2.1	Interruptions at transitions between active and non-active during DRX	372
8.2.1.2.2	Interruptions at transitions from non-DRX to DRX	372

8.2.1.2.3	Interruptions at SCell addition/release.....	372
8.2.1.2.4	Interruptions at SCell activation/deactivation.....	373
8.2.1.2.5	Interruptions during measurements on SCC.....	375
8.2.1.2.5.1	Interruptions during measurements on deactivated NR SCC.....	375
8.2.1.2.5.2	Interruptions during measurements on deactivated E-UTRAN SCC.....	375
8.2.1.2.5.3	Interruptions during CQI measurements on dormant E-UTRAN SCell	375
8.2.1.2.5.4	Interruptions during RRM measurements on dormant E-UTRAN SCC.....	376
8.2.1.2.6	Interruptions at UL carrier RRC reconfiguration	376
8.2.1.2.7	Interruptions due to Active BWP switching Requirement	376
8.2.1.2.8	Interruptions at direct SCell activation and hibernation	378
8.2.1.2.8.1	Interruptions during direct SCell activation and hibernation of E-UTRA SCell	378
8.2.1.2.8.2	Interruptions during direct SCell activation.....	378
8.2.1.2.9	Interruptions at SCell hibernation.....	378
8.2.1.2.10	Interruptions at SCell activation/deactivation with multiple downlink SCells	378
8.2.1.2.11	Interruptions due to UE-specific CBW change	379
8.2.1.2.12	Interruptions at NR SRS carrier based switching	379
8.2.1.2.13	Interruptions at E-UTRA SRS carrier based switching	380
8.2.1.2.14	DL Interruptions at switching between two uplink carriers.....	381
8.2.1.2.15	Interruptions due to SCell dormancy	382
8.2.1.2.15.1	Interruptions due to SCell dormancy switch.....	382
8.2.1.2.15.2	Interruptions due to CQI measurements during SCell dormancy	382
8.2.1.2.15.3	Interruptions due to RRM measurements during SCell dormancy	382
8.2.1.2.16	Interruptions when identifying CGI of an NR cell with autonomous gaps.....	382
8.2.1.2.17	Interruptions when identifying CGI of an E-UTRA cell with autonomous gaps.....	383
8.2.1.2.18	Interruptions at NR SRS antenna port switching.....	383
8.2.1.2.19	Interruptions at fast SCell activation	384
8.2.1.2.20	Interruptions due to PUCCH SCell activation/deactivation	385
8.2.2	SA: Interruptions with Standalone NR Carrier Aggregation	385
8.2.2.1	Introduction.....	385
8.2.2.2	Requirements	386
8.2.2.2.1	Interruptions at SCell addition/release.....	386
8.2.2.2.2	Interruptions at SCell activation/deactivation.....	387
8.2.2.2.3	Interruptions during measurements on deactivated SCC.....	388
8.2.2.2.4	Interruptions at UL carrier RRC reconfiguration	389
8.2.2.2.5	Interruptions due to Active BWP switching Requirement	389
8.2.2.2.6	Interruptions at inter-frequency SFTD measurement	390
8.2.2.2.7	Interruptions at SCell activation/deactivation with multiple downlink SCells	391
8.2.2.2.8	Interruptions due to UE-specific CBW change	392
8.2.2.2.9	Interruptions at NR SRS carrier based switching	392
8.2.2.2.10	DL Interruptions at UE switching between two uplink carriers	393
8.2.2.2.10A	DL Interruptions at UE switching between two uplink carriers with two transmit antenna connectors.....	394
8.2.2.2.10B	DL Interruptions at UE switching between one uplink band with one transmit antenna connector and one uplink band with two transmit antenna connectors	394
8.2.2.2.10C	DL Interruptions at UE switching between two uplink bands with two transmit antenna connectors.....	395
8.2.2.2.11	Interruptions at direct SCell activation.....	395
8.2.2.2.12	Interruptions due to SCell dormancy.....	395
8.2.2.2.12.1	Interruptions due to SCell dormancy switch.....	395
8.2.2.2.12.2	Interruptions due to CQI measurements during SCell dormancy	396
8.2.2.2.12.3	Interruptions due to RRM measurements during SCell dormancy	396
8.2.2.2.13	Interruptions at transitions between active and non-active during DRX	396
8.2.2.2.14	Interruptions when identifying CGI of an NR cell with autonomous gaps.....	396
8.2.2.2.15	Interruptions when identifying CGI of an E-UTRA cell with autonomous gaps.....	396
8.2.2.2.16	Interruptions at NR SRS antenna port switching.....	397
8.2.2.2.17	Interruptions at fast SCell activation	398
8.2.2.2.18	Interruptions due to PUCCH SCell activation/deactivation	399
8.2.3	NE-DC Interruptions.....	399
8.2.3.1	Introduction.....	399
8.2.3.2	Requirements	400
8.2.3.2.1	Interruptions at transitions between active and non-active during DRX	400
8.2.3.2.2	Interruptions at transitions from non-DRX to DRX	400

8.2.3.2.3	Interruptions at PSCell/SCell addition/release	400
8.2.3.2.4	Interruptions at SCell activation/deactivation.....	401
8.2.3.2.5	Interruptions during measurements on SCC	402
8.2.3.2.5.1	Interruptions during measurements on deactivated NR SCC.....	402
8.2.3.2.5.2	Interruptions during measurements on deactivated E-UTRAN SCC.....	402
8.2.3.2.5.3	Interruptions during CQI measurements on dormant E-UTRAN SCC.....	403
8.2.3.2.5.4	Interruptions during RRM measurements on dormant E-UTRAN SCC.....	403
8.2.3.2.6	Interruptions at UL carrier RRC reconfiguration	403
8.2.3.2.7	Interruptions due to Active BWP switching Requirement	404
8.2.3.2.8	Interruptions at direct SCell activation and hibernation	404
8.2.3.2.9	Interruptions at SCell hibernation.....	405
8.2.3.2.10	Interruptions at SCell activation/deactivation with multiple downlink SCells	405
8.2.3.2.11	Interruptions at NR SRS carrier based switching	405
8.2.3.2.12	Interruptions at E-UTRA SRS carrier based switching	406
8.2.3.2.13	Interruptions due to SCell dormancy.....	407
8.2.3.2.14	Interruptions when identifying CGI of an NR cell with autonomous gaps.....	408
8.2.3.2.15	Interruptions when identifying CGI of an E-UTRA cell with autonomous gaps	408
8.2.3.2.17	Interruptions at fast SCell activation	410
8.2.3.2.18	Interruptions due to UE-specific CBW change	410
8.2.3.2.19	Interruptions due to PUCCH SCell activation/deactivation	411
8.2.4	NR-DC: Interruptions	411
8.2.4.1	Introduction.....	411
8.2.4.2	Requirements	412
8.2.4.2.1	Interruptions at PSCell/SCell addition/release	412
8.2.4.2.2	Interruptions at SCell activation/deactivation.....	413
8.2.4.2.3	Interruptions during measurements on SCC.....	414
8.2.4.2.4	Interruptions at UL carrier RRC reconfiguration	414
8.2.4.2.5	Interruptions due to Active BWP switching Requirement	414
8.2.4.2.6	Interruptions at transitions between active and non-active during DRX	415
8.2.4.2.7	Interruptions at transitions from non-DRX to DRX	415
8.2.4.2.8	Interruptions at SCell activation/deactivation with multiple downlink SCells	415
8.2.4.2.9	Interruptions at NR SRS carrier based switching	415
8.2.4.2.10	Interruptions at direct SCell activation.....	417
8.2.4.2.11	Interruptions when identifying CGI of an NR cell with autonomous gaps.....	417
8.2.4.2.12	Interruptions when identifying CGI of an E-UTRA cell with autonomous gaps.....	418
8.2.4.2.13	Interruptions due to SCell dormancy	418
8.2.4.2.14	Interruptions at NR SRS antenna port switching.....	419
8.2.4.2.15	Interruptions at fast SCell activation	420
8.2.4.2.16	Interruptions at SCG activation/deactivation.....	420
8.2.4.2.17	Interruptions due to RRM measurements on deactivated SCG	421
8.2.4.2.18	Interruptions during RLM/BFD measurements on deactivated PSCell.....	421
8.2.4.2.19	Interruptions due to UE-specific CBW change	421
8.2.4.2A	Void.....	422
8.2.4.2A.1	Void	422
8.2.4.2A.2	Void	422
8.2.4.2A.3	Void	422
8.3	SCell Activation and Deactivation Delay.....	422
8.3.1	Introduction.....	422
8.3.2	SCell Activation Delay Requirement for Deactivated SCell	422
8.3.3	SCell Deactivation Delay Requirement for Activated SCell	427
8.3.4	Direct SCell Activation at SCell addition	427
8.3.5	Direct SCell Activation at Handover	428
8.3.7	SCell Activation Delay Requirement for Deactivated SCell with Multiple Downlink SCells	430
8.3.8	SCell Deactivation Delay Requirement for Activated SCell with Multiple Downlink SCells	434
8.3.9	Direct SCell Activation of Multiple Downlink SCells at SCell addition.....	435
8.3.10	Direct SCell Activation of Multiple Downlink SCells at Handover.....	436
8.3.12	SCell Activation Delay Requirement for Deactivated PUCCH SCell	437
8.3.13	SCell activation delay Requirement for Deactivated PUCCH SCell with Multiple SCells.....	440
8.3.14	SCell Deactivation Delay Requirement for Activated PUCCH SCell	442
8.3.15	SCell Deactivation Delay Requirement for Activated PUCCH SCell with Multiple Downlink SCells	442
8.3.16	Fast SCell Activation Delay Requirement for Deactivated SCell.....	443
8.3A	SCell Activation and Deactivation Delay in Carriers with CCA.....	445

8.3A.1	Introduction.....	445
8.3A.2	SCell Activation Delay Requirement for Deactivated SCell	446
8.3A.3	SCell Deactivation Delay Requirement for Activated SCell	450
8.4	UE UL carrier RRC reconfiguration delay	451
8.4.1	Introduction.....	451
8.4.2	UE UL carrier configuration delay requirement	451
8.4.3	UE UL carrier deconfiguration delay requirement	451
8.5	Link Recovery Procedures	451
8.5.1	Introduction.....	451
8.5.1.1	Introduction of Requirement on Link Recovery Procedures for UE configured with relaxed measurement criteria	452
8.5.2	Requirements for SSB based beam failure detection	453
8.5.2.1	Introduction.....	453
8.5.2.2	Minimum requirement	454
8.5.2.3	Measurement restriction for SSB based beam failure detection.....	457
8.5.2.4	Minimum requirement of SSB based beam failure detection for UE fulfilling relaxed measurement criteria	457
8.5.3	Requirements for CSI-RS based beam failure detection.....	458
8.5.3.1	Introduction.....	458
8.5.3.2	Minimum requirement	458
8.5.3.3	Measurement restrictions for CSI-RS beam failure detection.....	462
8.5.3.4	Minimum requirement of CSI-RS based beam failure detection for UE fulfilling relaxed measurement criteria	463
8.5.4	Minimum requirement for L1 indication	463
8.5.5	Requirements for SSB based candidate beam detection	464
8.5.5.1	Introduction.....	464
8.5.5.2	Minimum requirement	464
8.5.5.3	Measurement restriction for SSB based candidate beam detection.....	467
8.5.6	Requirements for CSI-RS based candidate beam detection.....	467
8.5.6.1	Introduction.....	467
8.5.6.2	Minimum requirement	468
8.5.6.3	Measurement restriction for CSI-RS based candidate beam detection	471
8.5.7	Scheduling availability of UE during beam failure detection	471
8.5.7.1	Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1	471
8.5.7.2	Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1.....	471
8.5.7.3	Scheduling availability of UE performing beam failure detection on FR2	472
8.5.7.4	Scheduling availability of UE performing beam failure detection on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR DC	472
8.5.8	Scheduling availability of UE during candidate beam detection	473
8.5.8.1	Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1	473
8.5.8.2	Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1.....	473
8.5.8.3	Scheduling availability of UE performing L1-RSRP measurement on FR2	473
8.5.8.4	Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR-DC.....	474
8.5.9	Requirements for Beam Failure Recovery in SCell	474
8.5.9.1	Introduction.....	474
8.5.9.2	Requirement	474
8.5.10	Minimum requirement at transitions for beam failure detection.....	474
8.5A	Link Recovery Procedures when CCA is used on target frequency	475
8.5A.1	Introduction.....	475
8.5A.2	Requirements for SSB based beam failure detection	475
8.5A.2.1	Introduction.....	475
8.5A.2.2	Minimum requirement	476
8.5A.2.3	Measurement restriction for SSB based beam failure detection.....	478
8.5A.3	Void	478
8.5A.4	Minimum requirement for L1 indication	478
8.5A.5	Requirements for SSB based candidate beam detection	479
8.5A.5.1	Introduction.....	479

8.5A.5.2	Minimum requirement	479
8.5A.5.3	Measurement restriction for SSB based candidate beam detection.....	481
8.5A.6	Void	482
8.5A.7	Scheduling availability of UE during beam failure detection	482
8.5A.7.1	Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH	482
8.5A.7.2	Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH	482
8.5A.7.3	Scheduling availability of UE performing beam failure detection on FR2-2.....	482
8.5A.7.4	Scheduling availability of UE performing beam failure detection on FR1 or FR2-2 in case of FR1-FR2-2 inter-band CA and NR DC.....	482
8.5A.8	Scheduling availability of UE during candidate beam detection	482
8.5A.8.3	Scheduling availability of UE performing L1-RSRP measurement on FR2-2.....	482
8.5A.8.4	Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2-2 in case of FR1-FR2-2 inter-band CA and NR-DC	482
8.5B	Link Recovery Procedures for Redcap.....	483
8.5B.1	Introduction.....	483
8.5B.2	Requirements for SSB based beam failure detection for Redcap	483
8.5B.2.1	Introduction.....	483
8.5B.2.2	Minimum requirement	484
8.5B.2.3	Measurement restriction for SSB based beam failure detection.....	485
8.5B.3	Requirements for CSI-RS based beam failure detection for Redcap	486
8.5B.3.1	Introduction.....	486
8.5B.3.2	Minimum requirement	486
8.5B.3.3	Measurement restrictions for CSI-RS beam failure detection.....	488
8.5B.4	Minimum requirement for L1 indication for Redcap.....	489
8.5B.5	Requirements for SSB based candidate beam detection for Redcap.....	489
8.5B.5.1	Introduction.....	489
8.5B.5.2	Minimum requirement	490
8.5B.5.3	Measurement restriction for SSB based candidate beam detection.....	491
8.5B.6	Requirements for CSI-RS based candidate beam detection for Redcap	492
8.5B.6.1	Introduction.....	492
8.5B.6.2	Minimum requirement	492
8.5B.6.3	Measurement restriction for CSI-RS based candidate beam detection	494
8.5B.7	Scheduling availability of UE during beam failure detection for Redcap.....	494
8.5B.7.1	Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1	495
8.5B.7.2	Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1.....	495
8.5B.7.3	Scheduling availability of UE performing beam failure detection on FR2	495
8.5B.8	Scheduling availability of UE during candidate beam detection for Redcap.....	495
8.5B.8.1	Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1	495
8.5B.8.2	Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1.....	496
8.5B.8.3	Scheduling availability of UE performing L1-RSRP measurement on FR2	496
8.5B.9	Minimum requirement at transitions for beam failure detection for Redcap	496
8.5C	Link Recovery Procedures for Satellite Access.....	496
8.5C.1	Introduction.....	496
8.5C.2	Requirements for SSB based beam failure detection	497
8.5C.2.1	Introduction.....	497
8.5C.2.2	Minimum requirement	497
8.5C.2.3	Measurement restriction for SSB based beam failure detection.....	498
8.5C.3	Requirements for CSI-RS based beam failure detection.....	498
8.5C.3.1	Introduction.....	498
8.5C.3.2	Minimum requirement	499
8.5C.3.3	Measurement restrictions for CSI-RS beam failure detection.....	500
8.5C.4	Minimum requirement for L1 indication	500
8.5C.5	Requirements for SSB based candidate beam detection	501
8.5C.5.1	Introduction.....	501
8.5C.5.2	Minimum requirement	501
8.5C.5.3	Measurement restriction for SSB based candidate beam detection.....	502

8.5C.6	Requirements for CSI-RS based candidate beam detection.....	502
8.5C.6.1	Introduction.....	502
8.5C.6.2	Minimum requirement	502
8.5C.6.3	Measurement restriction for CSI-RS based candidate beam detection	503
8.5C.7	Scheduling availability of UE during beam failure detection	504
8.5C.7.1	Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1	504
8.5C.7.2	Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1.....	504
8.5C.8	Scheduling availability of UE during candidate beam detection	504
8.5C.8.1	Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1	504
8.5C.8.2	Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1.....	504
8.5C.9	Minimum requirement at transitions for beam failure detection.....	505
8.6	Active BWP switch delay.....	505
8.6.1	Introduction.....	505
8.6.2	DCI and timer based BWP switch delay on a single CC	505
8.6.2A	DCI based BWP switch delay on multiple CCs.....	507
8.6.2A.1	Simultaneous DCI based BWP switch delay on multiple CCs	507
8.6.2A.2	Non-simultaneous DCI based BWP switch delay on multiple CCs	508
8.6.2B	Timer based BWP switch delay on multiple CCs.....	508
8.6.2B.1	Simultaneous timer based BWP switch delay on multiple CCs.....	509
8.6.2B.2	Non-simultaneous timer based BWP switch delay on multiple CCs	509
8.6.3	RRC based BWP switch delay on a single CC	510
8.6.3A	RRC based BWP switch delay on multiple CCs.....	510
8.6.3A.1	Simultaneous RRC based BWP switch delay on multiple CCs	510
8.6.3A.2	Non-simultaneous RRC based BWP switch delay on multiple CCs	511
8.6.4	BWP switch delay on Consistent UL CCA recovery.....	511
8.6A	Active BWP switch delay for RedCap	512
8.6A.1	Introduction.....	512
8.6A.2	DCI and timer based BWP switch delay on a single CC	512
8.6A.3	RRC based BWP switch delay on a single CC	513
8.6C	Active BWP switch delay for satellite access.....	514
8.6C.1	Introduction.....	514
8.6C.2	DCI and timer based BWP switch delay on a single CC	514
8.6C.3	RRC based BWP switch delay on a single CC	515
8.7	Void.....	516
8.8	NE-DC: E-UTRAN PSCell Addition and Release Delay	516
8.8.1	Introduction.....	516
8.8.2	E-UTRAN PSCell Addition Delay Requirement.....	516
8.8.3	E-UTRAN PSCell Release Delay Requirement	517
8.9	NR-DC: PSCell Addition and Release Delay.....	517
8.9.1	Introduction.....	517
8.9.2	PSCell Addition Delay Requirement	517
8.9.3	PSCell Release Delay Requirement.....	518
8.9A	Conditional PSCell Addition Delay	518
8.9A.1	Introduction.....	518
8.9A.2	Conditional PSCell Addition Delay Requirement	518
8.9A.2.1	Measurement time.....	519
8.9B	NR-DC: PSCell Addition and Release Delay in Carriers with CCA.....	519
8.9B.1	Introduction.....	519
8.9B.2	PSCell Addition Delay Requirement	519
8.9B.3	PSCell Release Delay Requirement.....	520
8.10	Active TCI state switching delay	520
8.10.3A	MAC-CE based TCI state switch delay in HST FR2 scenarios	522
8.10.4	DCI based TCI state switch delay.....	522
8.10.5	RRC based TCI state switch delay.....	522
8.10.6	Active TCI state list update delay.....	523
8.10A	Active TCI state switching delay with CCA	523
8.10A.1	Introduction.....	523
8.10A.2	Known conditions for TCI state.....	523

8.10A.3	MAC-CE based TCI state switch delay	524
8.10A.4	DCI based TCI state switch delay.....	525
8.10A.5	RRC based TCI state switch delay.....	525
8.10A.6	Active TCI state list update delay.....	526
8.10B	Active TCI state switching delay for RedCap	526
8.10B.1	Introduction.....	526
8.10B.2	Known conditions for TCI state.....	526
8.10B.3	MAC-CE based TCI state switch delay	526
8.10B.4	DCI based TCI state switch delay.....	527
8.10B.5	RRC based TCI state switch delay.....	527
8.10B.6	Active TCI state list update delay.....	528
8.10C	Active TCI state switching delay for satellite access	528
8.10C.1	Introduction.....	528
8.10C.2	MAC-CE based TCI state switch delay	528
8.10C.4	DCI based TCI state switch delay.....	529
8.10C.5	RRC based TCI state switch delay.....	529
8.10C.6	Active TCI state list update delay.....	529
8.11	PSCell Change.....	529
8.11A	PSCell Change in Carriers with CCA.....	530
8.11B	Conditional PSCell Change	530
8.11B.1	Introduction.....	530
8.11B.2	Conditional PSCell Change delay.....	530
8.11B.2.1	Measurement time	531
8.11D	Conditional PSCell Change in Carriers with CCA.....	531
8.11D.1	Introduction.....	531
8.11D.2	Conditional PSCell Change delay.....	531
8.11D.2.1	Measurement time.....	532
8.12	Uplink spatial relation switch delay	533
8.12.1	Introduction.....	533
8.12.2	Known conditions for spatial relation when associated with DL-RS	533
8.12.3	MAC-CE based spatial relation switch delay	533
8.12.4	DCI based spatial relation switch delay.....	534
8.12.5	RRC based spatial relation switch delay.....	534
8.12A	Uplink spatial relation switch delay for RedCap	535
8.12A.1	Introduction.....	535
8.12A.2	Known conditions for spatial relation when associated with DL-RS	535
8.12A.3	MAC-CE based spatial relation switch delay	535
8.12A.4	DCI based spatial relation switch delay.....	536
8.12A.5	RRC based spatial relation switch delay.....	536
8.12C	Uplink spatial relation switch delay for satellite access	537
8.12C.1	Void.....	537
8.12C.2	Void.....	537
8.12C.3	Void.....	537
8.12C.4	Void.....	537
8.12C.5	Void.....	537
8.13	UE-specific CBW change.....	537
8.13.1	Introduction.....	537
8.13.2	UE-specific CBW change delay	537
8.13A	UE-specific CBW change for RedCap	538
8.13A.1	Introduction.....	538
8.13A.2	UE-specific CBW change delay	538
8.13C	UE-specific CBW change for satellite access	538
8.13C.1	Introduction.....	538
8.13C.2	UE-specific CBW change delay	538
8.14	Pathloss reference signal switching delay	539
8.14.1	Introduction.....	539
8.14.2	Known conditions for pathloss reference signal	539
8.14.3	MAC-CE based pathloss reference signal switch delay.....	539
8.14C	Pathloss reference signal switching delay for satellite access	540
8.14C.1	Introduction.....	540
8.14C.2	Known conditions for pathloss reference signal	540
8.14C.3	MAC-CE based pathloss reference signal switch delay.....	541

8.15	Active downlink TCI state switching delay for unified TCI	541
8.15.1	Introduction.....	541
8.15.4	DCI based downlink TCI state switch delay.....	543
8.15.5	Active Downlink TCI state list update delay	543
8.16	Active uplink TCI state switching delay for unified TCI	544
8.16.1	Introduction.....	544
8.16.4	DCI based uplink TCI state switch delay.....	547
8.16.5	Active Uplink TCI state list update delay	547
8.17	SCG Activation and Deactivation Delay	549
8.17.1	Introduction.....	549
8.17.2	SCG Activation Delay Requirement.....	549
8.17.3	SCG Deactivation Delay Requirement	550
8.18	TRP specific Link Recovery Procedures.....	550
8.18.1	Introduction.....	550
8.18.2	Requirements for TRP specific SSB based beam failure detection	551
8.18.2.1	Introduction.....	551
8.18.2.2	Minimum requirement	551
8.18.2.3	Measurement restriction for SSB based beam failure detection.....	553
8.18.3	Requirements for CSI-RS based beam failure detection.....	554
8.18.3.1	Introduction.....	554
8.18.3.2	Minimum requirement	554
8.18.3.3	Measurement restrictions for CSI-RS beam failure detection.....	556
8.18.4	Minimum requirement for L1 indication	557
8.18.5	Requirements for SSB based candidate beam detection	557
8.18.5.1	Introduction.....	557
8.18.5.2	Minimum requirement	557
8.18.5.3	Measurement restriction for SSB based candidate beam detection.....	559
8.18.6	Requirements for CSI-RS based candidate beam detection.....	560
8.18.6.1	Introduction.....	560
8.18.6.2	Minimum requirement	560
8.18.6.3	Measurement restriction for CSI-RS based candidate beam detection	562
8.18.7	Requirements for TRP specific Beam Failure Recovery	563
8.18.7.1	Introduction.....	563
8.18.7.2	Requirement.....	563
8.18.8	Scheduling availability of UE during TRP specific beam failure detection	564
8.18.8.1	Scheduling availability of UE performing TRP specific beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1	564
8.18.8.2	Scheduling availability of UE performing TRP specific beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1	564
8.18.8.3	Scheduling availability of UE performing TRP specific beam failure detection on FR2	564
8.18.8.4	Scheduling availability of UE performing TRP specific beam failure detection on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR DC.....	565
8.18.9	Scheduling availability of UE during TRP specific candidate beam detection.....	565
8.18.9.1	Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1	565
8.18.9.2	Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1.....	565
8.18.9.3	Scheduling availability of UE performing L1-RSRP measurement on FR2	565
8.18.9.4	Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR-DC.....	566
8.19	Pre-configured measurement gap activation/deactivation delay	566
8.19.1	Introduction.....	566
8.19.2	Pre-configured measurement gap activation/deactivation upon DCI/timer-based BWP switch.....	566
8.19.2.1	Activation/deactivation upon DCI/timer-based BWP switch delay on a single CC.....	566
8.19.3	Pre-configured measurement gap activation/deactivation upon SCell activation/deactivation	567
8.19.4	Pre-configured measurement gap activation/deactivation upon RRC reconfiguration	567
9	Measurement Procedure	568
9.1	General measurement requirement.....	568
9.1.1	Introduction.....	568
9.1.2	Measurement gap	568
9.1.2.1	EN-DC: Measurement Gap Sharing.....	577

9.1.2.1a	SA: Measurement Gap Sharing.....	578
9.1.2.1b	NE-DC: Measurement Gap Sharing.....	579
9.1.2.1c	NR-DC: Measurement Gap Sharing	579
9.1.3	UE Measurement capability.....	580
9.1.3.1	EN-DC: Monitoring of multiple layers using gaps	580
9.1.3.1a	SA: Monitoring of multiple layers using gaps	581
9.1.3.1b	NE-DC: Monitoring of multiple layers using gaps	581
9.1.3.1c	NR-DC: Monitoring of multiple layers using gaps	582
9.1.3.2	EN-DC: Maximum allowed layers for multiple monitoring	582
9.1.3.2a	SA: Maximum allowed layers for multiple monitoring	583
9.1.3.2b	NE-DC: Maximum allowed layers for multiple monitoring	584
9.1.3.2c	NR-DC: Maximum allowed layers for multiple monitoring	584
9.1A.3.2	Void.....	585
9.1.3A	UE Measurement capability under operation mode with CCA.....	585
9.1.3A.1	EN-DC: Monitoring of multiple layers using gaps under CCA	585
9.1.3A.1a	SA: Monitoring of multiple layers using gaps under CCA	585
9.1.3A.2	EN-DC: Maximum allowed layers for multiple monitoring under CCA	586
9.1.3A.2a	SA: Maximum allowed layers for multiple monitoring under CCA	586
9.1.3C	UE Measurement capability under operation mode with satellite access	586
9.1.3C.1a	SA: Monitoring of multiple layers using gaps under satellite access.....	587
9.1.3C.2a	SA: Maximum allowed layers for multiple monitoring for SAN.....	587
9.1.4	Capabilities for Support of Event Triggering and Reporting Criteria.....	587
9.1.4.1	Introduction.....	587
9.1.4.2	Requirements	587
9.1.5	Carrier-specific scaling factor.....	590
9.1.5.1	Monitoring of multiple layers outside gaps.....	591
9.1.5.1.1	EN-DC mode: carrier-specific scaling factor for SSB-based, CSI-RS based L3 measurements and RSSI and channel occupancy measurements performed outside gaps.....	593
9.1.5.1.2	SA mode: carrier-specific scaling factor for SSB-based, CSI-RS based L3 measurements and RSSI and channel occupancy measurements performed outside gaps.....	594
9.1.5.1.3	NR-DC mode: carrier-specific scaling factor for SSB-based and CSI-RS based L3 measurements performed outside gaps.....	595
9.1.5.1.4	NE-DC mode: carrier-specific scaling factor for SSB-based and CSI-RS based measurements performed outside gaps.....	595
9.1.5.2	Monitoring of multiple layers within gaps.....	596
9.1.5.2.1	EN-DC mode: carrier-specific scaling factor for SSB, CSI-RS-based L3 measurements and RSSI and channel occupancy measurements performed within gaps	598
9.1.5.2.2	SA mode: carrier-specific scaling factor for SSB, CSI-RS-based L3 measurements and RSSI and channel occupancy measurements performed within gaps	599
9.1.5.2.3	NE-DC: carrier-specific scaling factor for SSB-based and CSI-RS based L3 measurements performed within gaps	601
9.1.5.2.4	NR-DC: carrier-specific scaling factor for SSB-based and CSI-RS-based L3 measurements performed within gaps	603
9.1.5.2.5	SA mode: carrier-specific scaling factor for PRS-based measurements performed within gaps...605	
9.1.5.2.6	NE-DC: carrier-specific scaling factor for PRS-based measurements performed within gaps.....605	
9.1.5.2.7	NR-DC: carrier-specific scaling factor for PRS-based measurements performed within gaps605	
9.1.5.3	Monitoring of multiple layers within NCSG	606
9.1.5.3.1	SA mode: carrier-specific scaling factor for measurements performed within NCSG	606
9.1.6	Minimum requirement at transitions.....	607
9.1.7	Pre-configured measurement gap	607
9.1.7.1	Introduction.....	607
9.1.7.2	Requirements applicability.....	608
9.1.7.3	Requirements	608
9.1.7.3.1	Requirements for autonomous activation/deactivation mechanism.....	608
9.1.7.3.2	Requirements for network-controlled activation/deactivation mechanism.....	609
9.1.7.3.3	Requirements for reception/transmission during activation/deactivation.....	609
9.1.8	Concurrent measurement gaps.....	610
9.1.8.1	Introduction.....	610
9.1.8.2	Requirements	610
9.1.8.3	Collision between concurrent measurement gaps	611
9.1.8.4	Measurement gap related requirements of concurrent measurement gaps	612
9.1.9	Network controlled small gap	612

9.1.9.1	Introduction.....	612
9.1.9.2	Requirements applicability.....	613
9.1.10	MUSIM gaps	615
9.1.11	UL gap for Tx power management.....	616
9.1A	General measurement requirement for RedCap	617
9.1A.1	Introduction.....	617
9.1A.2	Measurement gap	617
9.1A.2.1	SA: Measurement Gap Sharing.....	620
9.1A.3	UE Measurement capability.....	621
9.1A.3.1	SA: Monitoring of multiple layers using gaps	621
9.1A.3.2	SA: Maximum allowed layers for multiple monitoring	621
9.1A.4	Capabilities for Support of Event Triggering and Reporting Criteria.....	621
9.1A.4.1	Introduction.....	621
9.1A.4.2	Requirements	622
9.1A.5	Carrier-specific scaling factor.....	622
9.1A.5.1	Monitoring of multiple layers outside gaps.....	622
9.1A.5.1.1	SA mode: carrier-specific scaling factor for SSB-based measurements performed outside gaps.....	623
9.1A.5.2	Monitoring of multiple layers within gaps	623
9.1A.5.2.1	SA mode: carrier-specific scaling factor for SSB measurements performed within gaps	624
9.1A.6	Minimum requirement at transitions.....	624
9.1C	General measurement requirement for SAN	625
9.1C.1	Introduction.....	625
9.1C.2	Measurement gap	625
9.1C.8	Concurrent measurement gaps for SAN	627
9.1C.8.1	Introduction.....	627
9.1C.8.2	Requirements	627
9.1C.8.3	Collision between concurrent measurement gaps	627
9.1C.8.4	Measurement gap related requirements of concurrent measurement gaps	628
9.1C.9	Collision between SMTC and measurement gap for SAN	628
9.1C.9.1	Introduction.....	628
9.1C.9.2	Collision between SMTCs and measurement gap.....	628
9.1C.9.3	Collision between multiple SMTCs on a SAN carrier	628
9.2	NR intra-frequency measurements	629
9.2.1	Introduction.....	629
9.2.2	Requirements applicability	631
9.2.3	Number of cells and number of SSB	631
9.2.3.1	Requirements for FR1	631
9.2.3.2	Requirements for FR2.....	631
9.2.4	Measurement Reporting Requirements.....	631
9.2.4.1	Periodic Reporting	631
9.2.4.2	Event-triggered Periodic Reporting.....	632
9.2.4.3	Event Triggered Reporting.....	632
9.2.5	Intrafrequency measurements without measurement gaps.....	632
9.2.5.1	Intrafrequency cell identification	632
9.2.5.2	Measurement period.....	637
9.2.5.3	Scheduling availability of UE during intra-frequency measurements.....	639
9.2.5.3.1	Scheduling availability of UE performing measurements in TDD bands on FR1.....	640
9.2.5.3.2	Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1	640
9.2.5.3.3	Scheduling availability of UE performing measurements on FR2	641
9.2.5.3.4	Scheduling availability of UE performing measurements on FR1 or FR2 in case of FR1-FR2 inter-band CA	642
9.2.5.4	SFTD Measurements between PCell and PSCell.....	642
9.2.5.4.1	Introduction	642
9.2.5.4.2	SFTD Measurement delay	642
9.2.5.4.3	SFTD Measurement Reporting Delay	643
9.2.6	Intra-frequency measurements with measurement gaps	643
9.2.6.1	Void.....	643
9.2.6.2	Intra-frequency cell identification	643
9.2.6.3	Intrafrequency Measurement Period	646
9.2.7	Intra-frequency measurements with NCSG	647

9.2.7.1	Intra-frequency cell identification	647
9.2.7.2	Measurement period	649
9.2.7.3	Scheduling availability during intra-frequency measurement with NCSG	650
9.2A	NR intra-frequency measurements with CCA	650
9.2A.1	Introduction	650
9.2A.2	Requirements applicability	651
9.2A.3	Number of cells and number of SSB	652
9.2A.3.1	Requirements for FR1	652
9.2A.3.2	Requirements for FR2-2	652
9.2A.4	Measurement Reporting Requirements	652
9.2A.5	Intra-frequency measurements without measurement gaps	653
9.2A.5.2	Measurement period	657
9.2A.5.3	Scheduling availability of UE during intra-frequency measurements	659
9.2A.5.3.1	Scheduling availability of UE performing measurements in TDD bands on FR1	659
9.2A.5.3.2	Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1	659
9.2A.5.3.3	Scheduling availability of UE performing measurements in TDD bands on FR2-2	660
9.2A.6	Intra-frequency measurements with measurement gaps	660
9.2A.6.1	Intra-frequency cell identification	660
9.2A.6.2	Intra-frequency Measurement Period	662
9.2A.7	Intra-frequency RSSI and Channel occupancy measurements	663
9.2A.7.1	Intra-frequency RSSI measurements	663
9.2A.7.2	Intra-frequency Channel occupancy measurements	665
9.2A.7.3	Scheduling restriction during RSSI and Channel Occupancy measurements in FR1	666
9.2A.7.4	Scheduling restriction during RSSI measurements in FR2-2	666
9.2B	NR intra-frequency measurements for RedCap	667
9.2B.1	Introduction	667
9.2B.2	Requirements applicability	667
9.2B.3	Number of cells and number of SSB	668
9.2B.3.1	Requirements for FR1	668
9.2B.3.2	Requirements for FR2	668
9.2B.4	Measurement Reporting Requirements	668
9.2B.4.1	Periodic Reporting	668
9.2B.4.2	Event-triggered Periodic Reporting	668
9.2B.4.3	Event Triggered Reporting	668
9.2B.5	Intra-frequency measurements without measurement gaps	669
9.2B.5.1	Intra-frequency cell identification	669
9.2B.5.2	Measurement period	671
9.2B.5.3	Scheduling availability of UE during intra-frequency measurements	672
9.2B.5.3.1	Scheduling availability of UE performing measurements in TDD bands on FR1	672
9.2B.5.3.2	Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1	672
9.2B.5.3.3	Scheduling availability of UE performing measurements on FR2	673
9.2B.5.3.4	Scheduling availability of UE performing measurements in HD-FDD bands on FR1	673
9.2B.6	Intra-frequency measurements with measurement gaps	674
9.2B.6.1	Intra-frequency cell identification	674
9.2B.6.2	Intra-frequency Measurement Period	675
9.2C	NR intra-frequency measurements for SAN	676
9.2C.1	Introduction	676
9.2C.2	Requirements applicability	677
9.2C.3	Number of cells and number of SSB	678
9.2C.3.1	Requirements for FR1	678
9.2C.4	Measurement Reporting Requirements	678
9.2C.4.1	Periodic Reporting	678
9.2C.4.2	Event-triggered Periodic Reporting	678
9.2C.4.3	Event Triggered Reporting	678
9.2C.5	Intra frequency measurements without measurement gaps	679
9.2C.5.1	Intra frequency cell identification	679
9.2C.5.2	Measurement period	681
9.2C.5.3	Scheduling availability of UE during intra-frequency measurements	681
9.2C.5.3.1	Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1	681

9.2C.5.3.2	Scheduling availability of UE performing measurements on a neighbor cell served by a different satellite in LEO	682
9.2C.6	Intra-frequency measurements with measurement gaps	682
9.2C.6.1	Intra-frequency cell identification	682
9.2C.6.3	Intrafrequency Measurement Period	684
9.3	NR inter-frequency measurements	684
9.3.1	Introduction.....	684
9.3.2	Requirements applicability	686
9.3.2.1	Void.....	686
9.3.2.2	Void.....	686
9.3.3	Number of cells and number of SSB	686
9.3.3.1	Requirements for FR1	686
9.3.3.2	Requirements for FR2	686
9.3.4	Inter-frequency measurement with measurement gaps	686
9.3.4.1	Void.....	690
9.3.4.2	Void.....	690
9.3.5	Inter-frequency measurements.....	690
9.3.5.1	Void.....	691
9.3.5.2	Void.....	691
9.3.5.3	Void.....	691
9.3.6	Inter-frequency measurements reporting requirements.....	691
9.3.6.1	Periodic Reporting	691
9.3.6.2	Event-triggered Periodic Reporting.....	691
9.3.6.3	Event-triggered Reporting.....	691
9.3.7	Void	692
9.3.8	Inter-frequency SFTD measurement requirements.....	692
9.3.8.1	Introduction.....	692
9.3.8.2	SFTD Measurement delay.....	692
9.3.8.3	SFTD Measurement reporting delay	693
9.3.9	Inter frequency measurements without measurement gaps.....	693
9.3.9.1	Inter frequency Cell identification	693
9.3.9.2	Measurement period.....	696
9.3.9.3	Scheduling availability of UE during inter-frequency measurements when the SSB is completely contained in the active BWP of the UE.....	697
9.3.9.3.1	Scheduling availability of UE performing measurements in TDD bands on FR1.....	697
9.3.9.3.2	Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1	698
9.3.9.3.3	Scheduling availability of UE performing measurements on FR2	698
9.3.9.3.4	Scheduling availability of UE performing measurements on FR1 or FR2 in case of FR1-FR2 inter-band CA	699
9.3.9.4	Scheduling availability of UE during inter-frequency measurements when the SSB is not completely contained in the active BWP of the UE	699
9.3.9.4.1	Scheduling availability of UE performing measurements in TDD bands on FR1.....	699
9.3.9.4.2	Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1	700
9.3.9.4.3	Scheduling availability of UE performing measurements on FR2	700
9.3.9.4.4	Scheduling availability of UE performing measurements on FR1 or FR2 in case of FR1-FR2 inter-band CA	702
9.3.10	Inter-frequency measurement with NCSG.....	702
9.3.10.1	Inter-frequency cell identification	702
9.3.10.2	Measurement period.....	703
9.3.10.3	Scheduling availability during inter-frequency measurement with NCSG	704
9.3.10.3.1	Scheduling availability of UE performing measurements in TDD bands on FR1.....	704
9.3.10.3.2	Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1	705
9.3.10.3.3	Scheduling availability of UE performing measurements on FR2	705
9.3.10.3.4	Scheduling availability of UE performing measurements on FR1 or FR2 in case of FR1-FR2 inter-band CA	707
9.3A	NR inter-frequency measurements in carrier frequencies with CCA	707
9.3A.1	Introduction.....	707
9.3A.2	Requirements applicability	708
9.3A.3	Number of cells and number of SSB	708

9.3A.3.1	Requirements for FR1	708
9.3A.3.2	Requirements for FR2-2	708
9.3A.4	Inter-frequency cell identification	709
9.3A.5	Inter-frequency measurements	711
9.3A.6	NR Inter-frequency measurements reporting requirements	712
9.3A.6.1	Periodic Reporting	712
9.3A.6.2	Event-triggered Periodic Reporting	712
9.3A.6.3	Event-triggered Reporting	712
9.3A.8	Inter-frequency RSSI measurements	713
9.3A.9	Inter-frequency channel occupancy measurements	713
9.3B	NR inter-frequency measurements for RedCap	714
9.3B.1	Introduction	714
9.3B.2	Requirements applicability	714
9.3B.3	Number of cells and number of SSB	715
9.3B.3.1	Requirements for FR1	715
9.3B.3.2	Requirements for FR2	715
9.3B.4	Inter-frequency measurement with measurement gaps	715
9.3B.5	Inter-frequency measurements	717
9.3B.6	Inter-frequency measurements reporting requirements	717
9.3B.6.1	Periodic Reporting	717
9.3B.6.2	Event-triggered Periodic Reporting	718
9.3B.6.3	Event-triggered Reporting	718
9.3B.7	Inter frequency measurements without measurement gaps	718
9.3B.7.1	Inter frequency Cell identification	718
9.3B.7.2	Measurement period	720
9.3B.7.3	Scheduling availability of UE during inter-frequency measurements	721
9.3B.7.3.1	Scheduling availability of UE performing measurements in TDD bands on FR1	721
9.3B.7.3.2	Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1	722
9.3B.7.3.3	Scheduling availability of UE performing measurements on FR2	722
9.3B.7.3.4	Scheduling availability of UE performing measurements in HD-FDD bands on FR1	722
9.3C	NR inter-frequency measurements for SAN	723
9.3C.1	Introduction	723
9.3C.2	Requirements applicability	724
9.3C.3	Number of cells and number of SSB	724
9.3C.3.1	Requirements for FR1	724
9.3C.4	Inter-frequency measurement with measurement gaps	724
9.3C.5	Inter-frequency measurements	726
9.3C.6	Inter-frequency measurements reporting requirements	726
9.3C.6.1	Periodic Reporting	726
9.3C.6.2	Event-triggered Periodic Reporting	726
9.3C.6.3	Event-triggered Reporting	726
9.3C.7	Inter frequency measurements without measurement gaps	727
9.3C.7.1	Inter frequency Cell identification	727
9.3C.7.2	Measurement period	728
9.3C.7.3	Scheduling availability of UE during inter-frequency measurements	729
9.3C.7.3.1	Void	729
9.3C.7.3.2	Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1	729
9.4	Inter-RAT measurements	729
9.4.1	Introduction	729
9.4.2	NR – E-UTRAN FDD measurements	731
9.4.2.1	Introduction	731
9.4.2.2	Requirements when no DRX is used	731
9.4.2.3	Requirements when DRX is used	732
9.4.2.4	Measurement reporting requirements	734
9.4.2.4.1	Periodic Reporting	734
9.4.2.4.2	Event-Triggered Periodic Reporting	734
9.4.2.4.3	Event-Triggered Reporting	734
9.4.2.5	Scheduling Availability During NR – E-UTRAN FDD measurements with NCSG	735
9.4.3	NR – E-UTRAN TDD measurements	735
9.4.3.1	Introduction	735

9.4.3.2	Requirements when no DRX is used.....	735
9.4.3.3	Requirements when DRX is used.....	736
9.4.3.4	Measurement reporting requirements.....	738
9.4.3.4.1	Periodic Reporting.....	738
9.4.3.4.2	Event-Triggered Periodic Reporting.....	738
9.4.3.4.3	Event-Triggered Reporting.....	738
9.4.3.5	Scheduling Availability During NR – E-UTRAN TDD measurements with NCSG.....	739
9.4.4	Inter-RAT RSTD measurements.....	739
9.4.4.1	NR – E-UTRAN FDD RSTD measurements.....	739
9.4.4.1.1	Introduction	739
9.4.4.1.2	Requirements	740
9.4.4.2	NR – E-UTRAN TDD RSTD measurements	743
9.4.4.2.1	Introduction	743
9.4.4.2.2	Requirements	743
9.4.5	Inter-RAT E-CID measurements	747
9.4.5.1	NR–E-UTRAN FDD E-CID RSRP and RSRQ measurements	747
9.4.5.1.1	Introduction	747
9.4.5.1.2	Requirements.....	747
9.4.5.1.3	Measurement Reporting Delay.....	747
9.4.5.2	NR–E-UTRAN TDD E-CID RSRP and RSRQ measurements	747
9.4.5.2.1	Introduction	747
9.4.5.2.2	Requirements	747
9.4.5.2.3	Measurement Reporting Delay.....	747
9.4.6	NR – UTRAN FDD measurements	747
9.4.6.1	Introduction.....	747
9.4.6.2	Requirements when no DRX is used.....	748
9.4.6.3	Requirements when DRX is used.....	749
9.4.7	NR – E-UTRAN measurements with autonomous gaps.....	751
9.4.7.1	CGI identification of an E-UTRA cell with autonomous gaps.....	751
9.4.7.2	CGI reporting delay.....	751
9.4A	Inter-RAT measurements for RedCap.....	751
9.4A.1	Introduction.....	751
9.4A.2	NR – E-UTRAN FDD measurements	752
9.4A.2.1	Introduction.....	752
9.4A.2.2	Requirements when no DRX is used.....	753
9.4A.2.3	Requirements when DRX is used.....	754
9.4A.2.4	Measurement reporting requirements.....	755
9.4A.2.4.1	Periodic Reporting.....	755
9.4A.2.4.2	Event-Triggered Periodic Reporting.....	755
9.4A.2.4.3	Event-Triggered Reporting.....	755
9.4A.3	NR – E-UTRAN TDD measurements	755
9.4A.3.1	Introduction.....	755
9.4A.3.2	Requirements when no DRX is used.....	756
9.4A.3.3	Requirements when DRX is used.....	757
9.4A.3.4	Measurement reporting requirements.....	758
9.4A.3.4.1	Periodic Reporting.....	758
9.4A.3.4.2	Event-Triggered Periodic Reporting.....	759
9.4A.3.4.3	Event-Triggered Reporting.....	759
9.4A.4	NR – E-UTRAN measurements with autonomous gaps.....	759
9.4A.4.1	CGI identification of an E-UTRA cell with autonomous gaps.....	759
9.4A.4.2	CGI reporting delay.....	760
9.4A.4.3	CGI reporting scheduling restriction.....	760
9.5	L1-RSRP measurements for Reporting	761
9.5.1	Introduction.....	761
9.5.2	Requirements applicability	761
9.5.3	Measurement Reporting Requirements.....	761
9.5.3.1	Periodic Reporting	762
9.5.3.2	Semi-Persistent Reporting.....	762
9.5.3.3	Aperiodic Reporting.....	762
9.5.4	L1-RSRP measurement requirements	762
9.5.4.1	SSB based L1-RSRP Reporting	762
9.5.4.2	CSI-RS based L1-RSRP Reporting.....	765

9.5.4A	Void	769
9.5.4A.1	Void.....	769
9.5.5	Measurement restriction for CSI-RS and SSB for L1-RSRP measurement.....	769
9.5.5.1	Measurement restriction for SSB based L1-RSRP	769
9.5.5.2	Measurement restriction for CSI-RS based L1-RSRP	769
9.5.6	Scheduling availability of UE during L1-RSRP measurement	770
9.5.6.1	Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1	770
9.5.6.2	Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1.....	770
9.5.6.3	Scheduling availability of UE performing L1-RSRP measurement on FR2	771
9.5.6.4	Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA.....	772
9.5A	L1-RSRP measurements for Reporting under CCA	772
9.5A.1	Introduction.....	772
9.5A.2	Requirements applicability	773
9.5A.3	Measurement Reporting Requirements.....	773
9.5A.3.1	Periodic Reporting	773
9.5A.3.2	Semi-Persistent Reporting.....	773
9.5A.3.3	Aperiodic Reporting.....	774
9.5A.4	L1-RSRP measurement requirements	774
9.5A.4.1	SSB based L1-RSRP Reporting	774
9.5A.5	Measurement restriction for L1-RSRP measurement	776
9.5A.5.1	Measurement restriction for SSB based L1-RSRP	777
9.5A.6	Scheduling availability of UE during L1-RSRP measurement	777
9.5A.6.1	Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1	777
9.5A.6.2	Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1.....	777
9.5A.6.3	(Void).....	777
9.5A.6.3A	Scheduling availability of UE performing L1-RSRP measurement in case of FR1-FR2 inter-band CA	777
9.5A.6.3B	Scheduling availability of UE performing L1-RSRP measurement on FR2-2.....	777
9.5A.6.4	Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA.....	778
9.5B	L1-RSRP measurements for Reporting for RedCap.....	778
9.5B.1	Introduction.....	778
9.5B.2	Requirements applicability	779
9.5B.3	Measurement Reporting Requirements.....	779
9.5B.3.1	Periodic Reporting	779
9.5B.3.2	Semi-Persistent Reporting.....	780
9.5B.3.3	Aperiodic Reporting.....	780
9.5B.4	L1-RSRP measurement requirements	780
9.5B.4.1	SSB based L1-RSRP Reporting	780
9.5B.4.2	CSI-RS based L1-RSRP Reporting.....	782
9.5B.5	Measurement restriction for CSI-RS and SSB for L1-RSRP measurement.....	785
9.5B.5.1	Measurement restriction for SSB based L1-RSRP	785
9.5B.5.2	Measurement restriction for CSI-RS based L1-RSRP	785
9.5B.6	Scheduling availability of UE during L1-RSRP measurement	786
9.5B.6.1	Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1	786
9.5B.6.2	Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1.....	786
9.5B.6.3	Scheduling availability of UE performing L1-RSRP measurement on FR2	786
9.5C	L1-RSRP measurements for Reporting for satellite access	787
9.5C.1	Introduction.....	787
9.5C.3	Measurement Reporting Requirements.....	788
9.5C.3.1	Periodic Reporting	788
9.5C.3.2	Semi-Persistent Reporting.....	788
9.5C.3.3	Aperiodic Reporting.....	788
9.5C.4	L1-RSRP measurement requirements	788
9.5C.4.1	SSB based L1-RSRP Reporting	788

9.5C.5	Measurement restriction for L1-RSRP measurement	790
9.5C.5.1	Measurement restriction for SSB based L1-RSRP	790
9.5C.5.2	Measurement restriction for CSI-RS based L1-RSRP	791
9.5C.6	Scheduling availability of UE during L1-RSRP measurement	791
9.5C.6.1	Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1	791
9.5C.6.2	Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1	791
9.6	NE-DC: Measurements	791
9.6.1	Introduction	791
9.6.2	SFTD Measurements	792
9.6.2.1	Introduction	792
9.6.2.2	SFTD Measurement requirements	792
9.7	Cross Link Interference measurements	792
9.7.1	Introduction	792
9.7.2	SRS-RSRP measurements	793
9.7.2.1	Introduction	793
9.7.2.2	Requirements applicability	793
9.7.2.3	Measurement Reporting Requirements	793
9.7.2.3.1	Periodic Reporting	793
9.7.2.3.2	Event-triggered Periodic Reporting	793
9.7.2.3.3	Event Triggered Reporting	793
9.7.2.4	Measurement capability	794
9.7.2.5	SRS-RSRP measurement period	794
9.7.3	CLI-RSSI measurements	794
9.7.3.1	Introduction	794
9.7.3.2	Requirements applicability	794
9.7.3.3	Measurement Reporting Requirements	794
9.7.3.3.1	Periodic Reporting	795
9.7.3.3.2	Event-triggered Periodic Reporting	795
9.7.3.3.3	Event Triggered Reporting	795
9.7.3.4	Measurement capability	795
9.7.3.5	CLI-RSSI measurement period	795
9.7.4	Scheduling availability of UE during CLI measurements	795
9.7.4.1	Scheduling availability of UE performing measurement on FR1	795
9.7.4.2	Scheduling availability of UE performing measurement on FR2	796
9.8	L1-SINR measurements for Reporting	797
9.8.1	Introduction	797
9.8.2	Requirements applicability	797
9.8.3	Measurement Reporting Requirements	798
9.8.3.1	Periodic Reporting	798
9.8.3.2	Semi-Persistent Reporting	798
9.8.4	L1-SINR measurement requirements	798
9.8.4.1	L1-SINR reporting with CSI-RS based CMR and no dedicated IMR configured	798
9.8.4.3	L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured	803
9.8.5	Measurement restriction for L1-SINR measurement	805
9.8.5.1	Measurement restriction if SSB configured for L1-SINR Measurement	805
9.8.5.2	Measurement restriction if CSI-RS configured for L1-SINR measurement	805
9.8.5.3	Measurement restriction if CSI-IM configured for L1-SINR measurement	806
9.8.6	Scheduling availability of UE during L1-SINR measurement	807
9.8.6.1	Scheduling availability of UE performing L1-SINR measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1	807
9.8.6.2	Scheduling availability of UE performing L1-SINR measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1	807
9.8.6.4	Scheduling availability of UE performing L1-SINR measurement on FR1 or FR2 in case of FR1- FR2 inter-band CA	808
9.9	NR measurements for positioning	808
9.9.1	Introduction	808
9.9.1.1	General Aspects of Gap-based Measurement	808
9.9.1.2	General Aspects of Gapless Measurement	809
9.9.1.3	Scheduling Availability of UE during PRS Measurement without Measurement Gaps	810
9.9.2	RSTD measurements	811

9.9.2.1	Introduction.....	811
9.9.2.2	Requirements Applicability.....	811
9.9.2.3	Measurement Capability	811
9.9.2.4	Measurement Reporting Requirements	811
9.9.2.4.1	Void.....	811
9.9.2.4.2	Void.....	811
9.9.2.4.3	Void.....	811
9.9.2.5	Measurements Period Requirements	811
9.9.2.6	Void.....	814
9.9.2.7	Measurements Period Requirements without Measurement Gaps	814
9.9.2.8	Void.....	817
9.9.2.9	Measurements Period Requirements with both MG and PPW.....	817
9.9.3	PRS-RSRP measurements	818
9.9.3.1	Introduction.....	818
9.9.3.2	Requirements applicability.....	818
9.9.3.3	Measurement Capability	818
9.9.3.4	Measurement Reporting Requirements	818
9.9.3.5	Measurement Period Requirements	818
9.9.3.6	Measurement Period Requirements without Measurement Gaps.....	821
9.9.3.7	Void.....	823
9.9.3.8	Measurements Period Requirements with both MG and PPW.....	823
9.9.4	UE Rx-Tx time difference measurements.....	824
9.9.4.1	Introduction.....	824
9.9.4.2	Requirements Applicability.....	824
9.9.4.3	Measurement Capability	824
9.9.4.4	Measurement Reporting Requirements	824
9.9.4.5	Measurement Period Requirements	825
9.9.4.6	Measurement Period Requirements without Measurement Gaps.....	828
9.9.4.7	Void.....	831
9.9.4.8	Measurements Period Requirements with both MG and PPW.....	832
9.9.5	E-CID measurements.....	832
9.9.5.1	Introduction.....	832
9.9.5.2	Measurement Requirements.....	832
9.9.5.2.1	Intra-frequency Measurement Requirements.....	832
9.9.5.2.2	Inter-frequency Measurement Requirements.....	833
9.9.5.2.3	Measurement Reporting Delay.....	833
9.9.6	PRS-RSRPP measurements	833
9.9.6.1	Introduction.....	833
9.9.6.2	Requirements applicability.....	833
9.9.6.3	Measurement capability	834
9.9.6.4	Measurement reporting requirements.....	834
9.9.6.5	Measurement period requirements.....	834
9.9.6.6	Measurement Period Requirements without Measurement Gaps.....	834
9.9.6.7	Void.....	834
9.9.6.8	Measurements Period Requirements with both MG and PPW.....	834
9.10	CSI-RS based L3 measurements	834
9.10.1	Introduction.....	834
9.10.2	CSI-RS based intra-frequency measurements.....	835
9.10.2.1	Introduction.....	835
9.10.2.2	Requirements applicability.....	835
9.10.2.3	Number of cells and number of CSI-RS	836
9.10.2.3.1	Requirements for FR1	836
9.10.2.3.2	Requirements for FR2	836
9.10.2.4	Measurement Reporting Requirements	837
9.10.2.4.1	Periodic Reporting.....	837
9.10.2.4.2	Event-triggered Periodic Reporting.....	837
9.10.2.4.3	Event Triggered Reporting	837
9.10.2.5	Intra-frequency measurements without measurement gaps.....	837
9.10.2.6	Scheduling availability of UE during CSI-RS based intra-frequency measurements	839
9.10.2.6.1	Scheduling availability of UE performing CSI-RS based measurements in TDD bands	839
9.10.2.6.2	Scheduling availability of UE performing CSI-RS based measurements in FR2.....	839
9.10.3	CSI-RS based Inter-frequency measurements	840

9.10.3.1	Introduction.....	840
9.10.3.2	Requirements applicability.....	840
9.10.3.3	Number of cells and number of CSI-RS resources	841
9.10.3.3.1	Requirements for FR1	841
9.10.3.3.2	Requirements for FR2	841
9.10.3.4	Measurements reporting requirements	841
9.10.3.4.1	Periodic Reporting.....	841
9.10.3.4.2	Event-triggered Periodic Reporting.....	841
9.10.3.4.3	Event-triggered Reporting.....	841
9.10.3.5	Inter frequency measurements with measurement gaps	842
9.11	NR measurements with autonomous gaps.....	843
9.11.1	Introduction.....	843
9.11.2	CGI identification of an NR cell with autonomous gaps	843
9.11.3	CGI reporting delay	844
9.11A	NR measurements with autonomous gaps for RedCap	844
9.11A.1	Introduction.....	844
9.11A.2	CGI identification of an NR cell with autonomous gaps	845
9.11A.3	CGI reporting delay	846
9.11A.4	CGI reporting scheduling restriction	846
9.12	Measurement for Propagation Delay Compensation.....	846
9.12.1	Introduction.....	846
9.12.2	Requirements Applicability	846
9.12.3	Measurement Capability	847
9.12.4	Measurement period requirements.....	847
9.12.4.1	PRS Measurement Period	847
9.12.4.2	TRS Measurement Period	848
9.12.5	Measurement Reporting Requirements.....	849
9.12.6	Scheduling availability during measurement for Propagation Delay Compensation.....	849
9.12.7	Measurement restriction for measurement for Propagation Delay Compensation.....	849
9.13	L1-RSRP measurements for a cell with different PCI from serving cell.....	849
9.13.1	Introduction.....	849
9.13.2	Requirements Applicability	850
9.13.3	Measurement Reporting Requirements.....	850
9.13.3.1	Periodic Reporting	851
9.13.3.2	Semi-Persistent Reporting.....	851
9.13.3.3	Aperiodic Reporting.....	851
9.13.4	L1-RSRP measurement requirements.....	851
9.13.4.1	Inter-cell SSB based L1-RSRP Reporting.....	851
9.13.5	Measurement restriction for L1-RSRP measurement	853
9.13.5.1	Measurement restriction for SSB based L1-RSRP.....	854
9.13.6	Scheduling availability of UE during L1-RSRP measurement	854
9.13.6.1	Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1	855
9.13.6.2	Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1.....	855
9.13.6.3	Scheduling availability of UE performing L1-RSRP measurement on FR2	855
9.13.6.4	Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA.....	855
9.13.6.5	Scheduling availability of UE performing L1-RSRP measurement in TDD bands on FR1.....	856
10	Measurement Performance requirements.....	857
10.1	NR measurements.....	857
10.1.1	Introduction.....	857
10.1.2	Intra-frequency RSRP accuracy requirements for FR1.....	857
10.1.2.1	Intra-frequency SS-RSRP accuracy requirements.....	857
10.1.2.1.1	Absolute SS-RSRP Accuracy	857
10.1.2.1.2	Relative SS-RSRP Accuracy	858
10.1.2.2	Void.....	859
10.1.2.3	Intra-frequency CSI-RSRP accuracy requirements	859
10.1.2.3.1	Absolute CSI-RSRP Accuracy	859
10.1.2.3.2	Relative CSI-RSRP Accuracy	860
10.1.2B	Intra-frequency RSRP accuracy requirements for FR1 for CA/DC Idle Mode Measurements	861

10.1.2B.1	Intra-frequency SS-RSRP accuracy requirements.....	861
10.1.2B.1.1	Absolute SS-RSRP Accuracy	861
10.1.2C	Intra-frequency RSRP accuracy requirements for FR1 SAN.....	862
10.1.2C.1	Intra-frequency SS-RSRP accuracy requirements.....	862
10.1.2C.1.1	Absolute SS-RSRP Accuracy	862
10.1.2C.1.2	Relative SS-RSRP Accuracy	862
10.1.3	Intra-frequency RSRP accuracy requirements for FR2.....	863
10.1.3.1	Intra-frequency SS-RSRP accuracy requirements.....	863
10.1.3.1.1	Absolute SS-RSRP Accuracy	863
10.1.3.1.2	Relative SS-RSRP Accuracy	863
10.1.3.2	Void.....	864
10.1.3.3	Intra-frequency CSI-RSRP accuracy requirements.....	864
10.1.3.3.1	Absolute CSI-RSRP Accuracy	864
10.1.3.3.2	Relative CSI-RSRP Accuracy	865
10.1.3B	Intra-frequency RSRP accuracy requirements for FR2 for CA/DC Idle Mode Measurements	866
10.1.3B.1	Intra-frequency SS-RSRP accuracy requirements.....	866
10.1.3B.1.1	Absolute SS-RSRP Accuracy	866
10.1.4	Inter-frequency RSRP accuracy requirements for FR1.....	867
10.1.4.1	Inter-frequency SS-RSRP accuracy requirements.....	867
10.1.4.1.1	Absolute Accuracy of SS-RSRP in FR1.....	867
10.1.4.1.2	Relative Accuracy of SS-RSRP in FR1	867
10.1.4.2	Void.....	868
10.1.4.3	Inter-frequency CSI-RSRP accuracy requirements.....	868
10.1.4.3.1	Absolute Accuracy of CSI-RSRP in FR1	868
10.1.4.3.2	Relative Accuracy of CS-RSRP in FR1	869
10.1.4B	Inter-frequency RSRP accuracy requirements for FR1 for CA/DC Idle Mode Measurements	870
10.1.4B.1	Inter-frequency SS-RSRP accuracy requirements.....	870
10.1.4B.1.1	Absolute Accuracy of SS-RSRP in FR1.....	870
10.1.4C	Inter-frequency RSRP accuracy requirements for FR1 SAN.....	871
10.1.4C.1	Inter-frequency SS-RSRP accuracy requirements.....	871
10.1.4C.1.1	Absolute Accuracy of SS-RSRP in FR1.....	871
10.1.4C.1.2	Relative Accuracy of SS-RSRP in FR1	872
10.1.5	Inter-frequency RSRP accuracy requirements for FR2.....	872
10.1.5.1	Inter-frequency SS-RSRP accuracy requirements.....	872
10.1.5.1.1	Absolute SS-RSRP Accuracy	872
10.1.5.1.2	Relative SS-RSRP Accuracy	873
10.1.5.2	Void.....	874
10.1.5.3	Inter-frequency CSI-RSRP accuracy requirements.....	874
10.1.5.3.1	Absolute CSI-RSRP Accuracy	874
10.1.5.3.2	Relative CSI-RSRP Accuracy	875
10.1.5B	Inter-frequency RSRP accuracy requirements for FR2 for CA/DC Idle Mode Measurements	875
10.1.5B.1	Inter-frequency SS-RSRP accuracy requirements.....	875
10.1.5B.1.1	Absolute SS-RSRP Accuracy	876
10.1.6	RSRP Measurement Report Mapping.....	876
10.1.7	Intra-frequency RSRQ accuracy requirements for FR1	878
10.1.7.1	Intra-frequency SS-RSRQ accuracy requirements in FR1	878
10.1.7.1.1	Absolute SS-RSRQ Accuracy in FR1	878
10.1.7.2	Intra-frequency CSI-RSRQ accuracy requirements	879
10.1.7.2.1	Absolute CSI-RSRQ Accuracy	879
10.1.7B	Intra-frequency RSRQ accuracy requirements for FR1 for CA/DC Idle Mode Measurements.....	880
10.1.7B.1	Intra-frequency SS-RSRQ accuracy requirements in FR1	880
10.1.7B.1.1	Absolute SS-RSRQ Accuracy in FR1	880
10.1.7C	Intra-frequency RSRQ accuracy requirements for FR1 SAN.....	881
10.1.7C.1	Intra-frequency SS-RSRQ accuracy requirements in FR1	881
10.1.7C.1.1	Absolute SS-RSRQ Accuracy in FR1	881
10.1.8	Intra-frequency RSRQ accuracy requirements for FR2.....	881
10.1.8.1	Intra-frequency SS-RSRQ accuracy requirements in FR2	881
10.1.8.1.1	Absolute SS-RSRQ Accuracy in FR2	881
10.1.8.2	Intra-frequency CSI-RSRQ accuracy requirements	882
10.1.8.2.1	Absolute CSI-RSRQ Accuracy	882
10.1.8B	Intra-frequency RSRQ accuracy requirements for FR2 for CA/DC Idle Mode Measurements.....	883
10.1.8B.1	Intra-frequency SS-RSRQ accuracy requirements in FR2	883

10.1.8B.1.1	Absolute SS-RSRQ Accuracy in FR2	883
10.1.9	Inter-frequency RSRQ accuracy requirements for FR1	883
10.1.9.1	Inter-frequency SS-RSRQ accuracy requirements in FR1	883
10.1.9.1.1	Absolute Accuracy of SS-RSRQ in FR1	883
10.1.9.1.2	Relative Accuracy of SS-RSRQ in FR1	884
10.1.9.2	Inter-frequency CSI-RSRQ accuracy requirements	885
10.1.9.2.1	Absolute CSI-RSRQ Accuracy	885
10.1.9.2.2	Relative CSI-RSRQ Accuracy	886
10.1.9B	Inter-frequency RSRQ accuracy requirements for FR1 for CA/DC Idle Mode Measurements	887
10.1.9B.1	Inter-frequency SS-RSRQ accuracy requirements in FR1	887
10.1.9B.1.1	Absolute Accuracy of SS-RSRQ in FR1	887
10.1.9C	Inter-frequency RSRQ accuracy requirements for FR1 SAN	888
10.1.9C.1	Inter-frequency SS-RSRQ accuracy requirements in FR1	888
10.1.9C.1.1	Absolute Accuracy of SS-RSRQ in FR1	888
10.1.9C.1.2	Relative Accuracy of SS-RSRQ in FR1	888
10.1.10	Inter-frequency RSRQ accuracy requirements for FR2	889
10.1.10.1	Inter-frequency SS-RSRQ accuracy requirements in FR2	889
10.1.10.1.1	Absolute Accuracy of SS-RSRQ in FR2	889
10.1.10.1.2	Relative Accuracy of SS-RSRQ in FR2	889
10.1.10.2	Inter-frequency CSI-RSRQ accuracy requirements	890
10.1.10.2.1	Absolute CSI-RSRQ Accuracy	890
10.1.10.2.2	Relative CSI-RSRQ Accuracy	891
10.1.10B	Inter-frequency RSRQ accuracy requirements for FR2 for CA/DC Idle Mode Measurements	892
10.1.10B.1	Inter-frequency SS-RSRQ accuracy requirements in FR2	892
10.1.10B.1.1	Absolute Accuracy of SS-RSRQ in FR2	892
10.1.11	RSRQ report mapping	892
10.1.12	Intra-frequency SINR accuracy requirements for FR1	893
10.1.12.1	Intra-frequency SS-SINR accuracy requirements in FR1	893
10.1.12.1.1	Absolute SS-SINR Accuracy in FR1	893
10.1.12.2	Intra-frequency CSI-SINR accuracy requirements in FR1	894
10.1.12.2.1	Absolute CSI-SINR Accuracy in FR1	894
10.1.12C	Intra-frequency SINR accuracy requirements for FR1 SAN	895
10.1.12C.1	Intra-frequency SS-SINR accuracy requirements in FR1	895
10.1.12C.1.1	Absolute SS-SINR Accuracy in FR1	895
10.1.13	Intra-frequency SINR accuracy requirements for FR2	895
10.1.13.1	Intra-frequency SS-SINR accuracy requirements in FR2	895
10.1.13.1.1	Absolute SS-SINR Accuracy in FR2	895
10.1.13.2	Intra-frequency CSI-SINR accuracy requirements in FR2	896
10.1.13.2.1	Absolute CSI-SINR Accuracy in FR2	896
10.1.14	Inter-frequency SINR accuracy requirements for FR1	897
10.1.14.1	Inter-frequency SS-SINR accuracy requirements in FR1	897
10.1.14.1.1	Aboslute Accuracy of SS-SINR in FR1	897
10.1.14.1.2	Relative Accuracy of SS-SINR in FR1	897
10.1.14.2	Inter-frequency CSI-SINR accuracy requirements in FR1	898
10.1.14.2.1	Aboslute Accuracy of CSI-SINR in FR1	898
10.1.14.2.2	Relative Accuracy of CSI-SINR in FR1	899
10.1.14C	Inter-frequency SINR accuracy requirements for FR1 SAN	900
10.1.14C.1	Inter-frequency SS-SINR accuracy requirements in FR1	900
10.1.14C.1.1	Aboslute Accuracy of SS-SINR in FR1	900
10.1.14C.1.2	Relative Accuracy of SS-SINR in FR1	900
10.1.15	Inter-frequency SINR accuracy requirements for FR2	901
10.1.15.1	Inter-frequency SS-SINR accuracy requirements in FR2	901
10.1.15.1.1	Aboslute Accuracy of SS-SINR in FR2	901
10.1.15.1.2	Relative Accuracy of SS-SINR in FR2	902
10.1.15.2	Inter-frequency CSI-SINR accuracy requirements in FR2	902
10.1.15.2.1	Aboslute Accuracy of CSI-SINR in FR2	902
10.1.15.2.2	Relative Accuracy of CSI-SINR in FR2	903
10.1.16	SINR report mapping	904
10.1.16.1	SS-SINR and CSI-SINR measurement report mapping	904
10.1.17	Power Headroom	905
10.1.17.1	Power Headroom Report	905
10.1.17.1.1	Power Headroom Report Mapping	905

10.1.18	$P_{\text{CMAX,c,f}}$	905
10.1.18.1	Report Mapping	905
10.1.19	L1-RSRP accuracy requirements for FR1	906
10.1.19.1	SSB based L1-RSRP accuracy requirements	906
10.1.19.1.1	Absolute Accuracy	906
10.1.19.1.2	Relative Accuracy	907
10.1.19.2	CSI-RS based L1-RSRP accuracy requirements	907
10.1.19.2.1	Absolute Accuracy	907
10.1.19.2.2	Relative Accuracy	908
10.1.19C	L1-RSRP accuracy requirements for FR1 SAN	909
10.1.19C.1	SSB based L1-RSRP accuracy requirements	909
10.1.19C.1.1	Absolute Accuracy	909
10.1.19C.1.2	Relative Accuracy	910
10.1.19C.2	CSI-RS based L1-RSRP accuracy requirements	910
10.1.19C.2.1	Absolute Accuracy	910
10.1.19C.2.2	Relative Accuracy	911
10.1.20	L1-RSRP accuracy requirements for FR2	911
10.1.20.1	SSB based L1-RSRP accuracy requirements	911
10.1.20.1.1	Absolute Accuracy	911
10.1.20.1.2	Relative Accuracy	912
10.1.20.2	CSI-RS based L1-RSRP accuracy requirements	913
10.1.20.2.1	Absolute Accuracy	913
10.1.20.2.2	Relative Accuracy	913
10.1.21	SFTD accuracy requirements	914
10.1.21.1	SFTD accuracy requirements for NE-DC	914
10.1.21.2	SFTD accuracy requirements for NR-DC	916
10.1.21.3	Inter frequency SFTD accuracy requirements	917
10.1.22	CLI measurement accuracy requirements	918
10.1.22.1	SRS-RSRP	918
10.1.22.1.1	SRS-RSRP Accuracy	918
10.1.22.1.2	SRS-RSRP report mapping	919
10.1.22.2	CLI-RSSI	920
10.1.22.2.1	CLI-RSSI Accuracy	920
10.1.22.2.2	CLI-RSSI report mapping	921
10.1.23	RSTD Measurements	921
10.1.23.1	Introduction	921
10.1.23.2	Measurement Accuracy Requirements	921
10.1.23.3	Report mapping	928
10.1.23.3.1	Absolute DL RSTD Measurement Reporting	928
10.1.23.3.2	Differential Reporting for DL RSTD Measurement	930
10.1.23.3.3	Additional Path Report Mapping for DL RSTD	931
10.1.24	PRS-RSRP Measurements	933
10.1.24.1	Introduction	933
10.1.24.2	Measurement Accuracy Requirements	933
10.1.24.2.1	Absolute PRS RSRP accuracy	933
10.1.24.2.2	Relative PRS RSRP accuracy	937
10.1.24.3	Report mapping	940
10.1.24.3.1	Absolute PRS-RSRP Measurement Report Mapping	940
10.1.24.3.2	Differential Report Mapping for PRS-RSRP Measurement	941
10.1.25	UE Rx-Tx Time Difference Measurements	942
10.1.25.1	Introduction	942
10.1.25.2	Measurement Accuracy Requirements	942
10.1.25.3	Report mapping	951
10.1.25.3.1	Absolute UE Rx-Tx Measurement Report Mapping	952
10.1.25.3.2	Differential UE Rx-Tx Measurement Report Mapping	953
10.1.25.3.3	Additional Path Report Mapping for UE Rx-Tx Time Difference	955
10.1.26	FR2 P-MPR report	957
10.1.26.1	Report mapping	957
10.1.27	L1-SINR accuracy requirements for FR1	957
10.1.27.1	L1-SINR accuracy requirements with CSI-RS based CMR and no dedicated IMR configured	957
10.1.27.1.1	Absolute Accuracy	957
10.1.27.1.2	Relative Accuracy	958

10.1.27.2	L1-SINR accuracy requirements with SSB based CMR and dedicated IMR configured	959
10.1.27.2.1	Absolute Accuracy	959
10.1.27.2.2	Relative Accuracy	960
10.1.27.3	L1-SINR accuracy requirements with CSI-RS based CMR and dedicated IMR configured	962
10.1.27.3.1	Absolute Accuracy	962
10.1.27.3.2	Relative Accuracy	963
10.1.28	L1-SINR accuracy requirements for FR2	965
10.1.29	Intra-frequency RSRQ accuracy requirements under CCA	971
10.1.29.1	Intra-frequency SS-RSRQ accuracy requirements in FR1	971
10.1.29.1.1	Absolute SS-RSRQ Accuracy	971
10.1.30	Inter-frequency RSRQ accuracy requirements under CCA	971
10.1.30.1	Inter-frequency SS-RSRQ accuracy requirements in FR1	971
10.1.30.1.1	Absolute Accuracy of SS-RSRQ	971
10.1.30.1.2	Relative Accuracy of SS-RSRQ	972
10.1.31	Intra-frequency SINR accuracy requirements under CCA	973
10.1.31.1	Intra-frequency SS-SINR accuracy requirements in FR1	973
10.1.31.1.1	Absolute SS-SINR Accuracy	973
10.1.32	Inter-frequency SINR accuracy requirements under CCA	973
10.1.32.1	Inter-frequency SS-SINR accuracy requirements in FR1	973
10.1.32.1.1	Absolute Accuracy of SS-SINR	973
10.1.32.1.2	Relative Accuracy of SS-SINR	974
10.1.33	L1-RSRP accuracy requirements under CCA	974
10.1.33.1	SSB based L1-RSRP accuracy requirements in FR1	974
10.1.33.1.1	Absolute Accuracy	974
10.1.33.1.2	Relative Accuracy	975
10.1.34	RSSI measurements under CCA	975
10.1.34.1	Intra-frequency absolute RSSI measurement accuracy requirements in FR1	975
10.1.34.2	Inter-frequency absolute RSSI measurement accuracy requirements in FR1	976
10.1.34.3	RSSI measurement report mapping	976
10.1.35	Channel occupancy measurements under CCA	976
10.1.35.1	Intra-frequency channel occupancy measurement accuracy requirements in FR1	976
10.1.35.2	Inter-frequency channel occupancy measurement accuracy requirements in FR1	977
10.1.36	Intra-frequency RSRP accuracy requirements under CCA	977
10.1.36.1	Intra-frequency SS-RSRP accuracy requirements in FR1	977
10.1.36.1.1	Absolute SS-RSRP Accuracy	977
10.1.36.1.2	Relative SS-RSRP Accuracy	978
10.1.37	Inter-frequency RSRP accuracy requirements under CCA	978
10.1.37.1	Inter-frequency SS-RSRP accuracy requirements in FR1	978
10.1.37.1.1	Absolute Accuracy of SS-RSRP	978
10.1.37.1.2	Relative Accuracy of SS-RSRP	979
10.1.38	PRS-RSRPP Measurements	979
10.1.38.1	Introduction	979
10.1.38.2	Measurement Accuracy Requirements	980
10.1.38.2.1	Absolute PRS RSRPP accuracy	980
10.1.38.3	Report mapping	983
10.1.38.3.1	Absolute PRS-RSRPP Measurement Report Mapping	983
10.1.38.3.2	Differential Report Mapping for PRS-RSRPP Measurement	984
10.1.39	UE Rx-Tx time difference measurements for RTT-based PDC	985
10.1.39.1	Void	985
10.1.39.2	Measurement Accuracy Requirements for PRS	985
10.1.39.3	Measurement Accuracy Requirements for TRS	988
10.1.40	Void	990
10.1A	NR measurements for RedCap	990
10.1A.1	Introduction	990
10.1A.2	Intra-frequency RSRP accuracy requirements for FR1	990
10.1A.2.1	Intra-frequency SS-RSRP accuracy requirements	990
10.1A.2.1.1	Absolute SS-RSRP Accuracy	990
10.1A.2.1.2	Relative SS-RSRP Accuracy	991
10.1A.3	Intra-frequency RSRP accuracy requirements for FR2	992
10.1A.3.1	Intra-frequency SS-RSRP accuracy requirements	992
10.1A.3.1.1	Absolute SS-RSRP Accuracy	992
10.1A.3.1.2	Relative SS-RSRP Accuracy	992

10.1A.4	Inter-frequency RSRP accuracy requirements for FR1.....	992
10.1A.4.1	Inter-frequency SS-RSRP accuracy requirements.....	992
10.1A.4.1.1	Absolute Accuracy of SS-RSRP in FR1.....	992
10.1A.4.1.2	Relative Accuracy of SS-RSRP in FR1.....	993
10.1A.5	Inter-frequency RSRP accuracy requirements for FR2.....	994
10.1A.5.1	Inter-frequency SS-RSRP accuracy requirements.....	994
10.1A.5.1.1	Absolute SS-RSRP Accuracy.....	994
10.1A.5.1.2	Relative SS-RSRP Accuracy.....	994
10.1A.6	Intra-frequency RSRQ accuracy requirements for FR1.....	994
10.1A.6.1	Intra-frequency SS-RSRQ accuracy requirements in FR1.....	994
10.1A.6.1.1	Absolute SS-RSRQ Accuracy in FR1.....	994
10.1A.7	Intra-frequency RSRQ accuracy requirements for FR2.....	995
10.1A.7.1	Intra-frequency SS-RSRQ accuracy requirements in FR2.....	995
10.1A.7.1.1	Absolute SS-RSRQ Accuracy in FR2.....	995
10.1A.8	Inter-frequency RSRQ accuracy requirements for FR1.....	995
10.1A.8.1	Inter-frequency SS-RSRQ accuracy requirements in FR1.....	995
10.1A.8.1.1	Absolute Accuracy of SS-RSRQ in FR1.....	995
10.1A.8.1.2	Relative Accuracy of SS-RSRQ in FR1.....	995
10.1A.9	Inter-frequency RSRQ accuracy requirements for FR2.....	996
10.1A.9.1	Inter-frequency SS-RSRQ accuracy requirements in FR2.....	996
10.1A.9.1.1	Absolute Accuracy of SS-RSRQ in FR2.....	996
10.1A.9.1.2	Relative Accuracy of SS-RSRQ in FR2.....	996
10.1A.10	Intra-frequency SINR accuracy requirements for FR1.....	996
10.1A.10.1	Intra-frequency SS-SINR accuracy requirements in FR1.....	996
10.1A.10.1.1	Absolute SS-SINR Accuracy in FR1.....	996
10.1A.11	Intra-frequency SINR accuracy requirements for FR2.....	997
10.1A.11.1	Intra-frequency SS-SINR accuracy requirements in FR2.....	997
10.1A.11.1.1	Absolute SS-SINR Accuracy in FR2.....	997
10.1A.12	Inter-frequency SINR accuracy requirements for FR1.....	997
10.1A.12.1	Inter-frequency SS-SINR accuracy requirements in FR1.....	997
10.1A.12.1.1	Absolute Accuracy of SS-SINR in FR1.....	997
10.1A.12.1.2	Relative Accuracy of SS-SINR in FR1.....	998
10.1A.13	Inter-frequency SINR accuracy requirements for FR2.....	999
10.1A.13.1	Inter-frequency SS-SINR accuracy requirements in FR2.....	999
10.1A.13.1.1	Absolute Accuracy of SS-SINR in FR2.....	999
10.1A.13.1.2	Relative Accuracy of SS-SINR in FR2.....	999
10.1A.14	L1-RSRP accuracy requirements for FR1.....	999
10.1A.14.1	SSB based L1-RSRP accuracy requirements.....	999
10.1A.14.1.1	Absolute Accuracy.....	999
10.1A.14.1.2	Relative Accuracy.....	1000
10.1A.14.2	CSI-RS based L1-RSRP accuracy requirements.....	1000
10.1A.14.2.1	Absolute Accuracy.....	1000
10.1A.14.2.2	Relative Accuracy.....	1001
10.1A.15	L1-RSRP accuracy requirements for FR2.....	1002
10.1A.15.1	SSB based L1-RSRP accuracy requirements.....	1002
10.1A.15.1.1	Absolute Accuracy.....	1002
10.1A.15.1.2	Relative Accuracy.....	1002
10.1A.15.2	CSI-RS based L1-RSRP accuracy requirements.....	1002
10.1A.15.2.1	Absolute Accuracy.....	1002
10.1A.15.2.2	Relative Accuracy.....	1002
10.2	E-UTRAN measurements.....	1003
10.2.1	Introduction.....	1003
10.2.2	E-UTRAN RSRP measurements.....	1003
10.2.3	E-UTRAN RSRQ measurements.....	1003
10.2.4	E-UTRAN RSTD measurements.....	1003
10.2.5	E-UTRAN RS-SINR measurements.....	1004
10.2.6	E-UTRAN RSRP measurements for CA/DC Idle Mode Measurements.....	1004
10.2.7	E-UTRAN RSRQ measurements for CA/DC Idle Mode Measurements.....	1004
10.2A	E-UTRAN measurements for RedCap.....	1005
10.2A.1	Introduction.....	1005
10.2A.2	E-UTRAN RSRP measurements.....	1005
10.2A.3	E-UTRAN RSRQ measurements.....	1005

10.2A.4	E-UTRAN RS-SINR measurements	1006
10.3	UTRAN FDD Measurements	1006
10.3.1	UTRAN FDD CPICH RSCP	1006
10.3.2	UTRAN FDD CPICH Ec/No	1007
10.4	V2X measurements	1007
10.4.1	Introduction	1007
10.4.2	Intra-frequency PSBCH-RSRP accuracy requirements for FR1	1007
10.4.2.1	PSBCH-RSRP Absolute Accuracy	1007
10.4.2.2	PSBCH-RSRP Relative Accuracy	1008
10.4.3	Intra-Frequency SL-RSSI Measurement Accuracy Requirements for FR1	1008
10.4.3.1	Absolute SL-RSSI Accuracy	1008
10.4.4	Intra-Frequency L1 SL-RSRP Measurement Accuracy Requirements for FR1	1009
10.4.4.1	Absolute L1 SL-RSRP Accuracy	1009
10.4.5	Intra-Frequency Discovery Signal Measurement Accuracy Requirements	1010
10.4.5.1	Absolute Discovery Signal Measurement Accuracy	1010
11	Void	1010
12	V2X Requirements	1011
12.1	Introduction	1011
12.2	UE Transmit Timing	1011
12.2.1	Introduction	1011
12.2.2	GNSS as synchronization reference source	1011
12.2.3	NR Cell as synchronization reference source	1012
12.2.4	E-URTAN Cell as synchronization reference source	1012
12.2.5	SyncRef UE as synchronization reference source	1013
12.3	Initiation/Cease of SLSS Transmissions	1013
12.3.1	Introduction	1013
12.3.1.1	Initiation/Cease of SLSS transmissions with NR cell as synchronization reference source	1013
12.3.1.2	Initiation/Cease of SLSS transmissions with EUTRAN cell as synchronization reference source	1014
12.3.1.3	Initiation/Cease of SLSS transmissions with GNSS as synchronization reference source	1015
12.3.1.4	Initiation/Cease of SLSS transmissions with SyncRef UE as synchronization reference source	1015
12.4	Selection / Reselection of V2X Synchronization Reference Source	1016
12.5	L1 SL-RSRP measurements	1017
12.5.1	Introduction	1017
12.5.2	SL-RSRP measurements	1017
12.6	Congestion Control measurements	1018
12.7	Interruption	1018
12.7.1	Interruptions to WAN due to V2X Sidelink Communication	1018
12.7.2	V2X Sidelink Communication Dropping due to synchronization source change	1019
12.7.3	Interruptions to WAN due to switching between E-UTRA V2X Sidelink and NR V2X Sidelink	1020
12.7.4	Interruptions to WAN at transitions between active and non-active during SL-DRX	1021
12.7.5	Interruptions to V2X sidelink at transitions between active and non-active during DRX	1021
12.7.6	Interruptions to V2X sidelink due to Active BWP switching Requirement	1022
12.7.7	Interruptions to WAN due to SyncRef UE detection and/or Sensing during SL DRX off duration	1022
12.7.8	Interruptions at NR sidelink discovery configuration	1022
12.8	Reliability of GNSS signal	1022
12.9	Scheduling availability	1023
12.9.1	Scheduling availability of UE switching between E-UTRA sidelink and NR sidelink	1023
12.9.2	Scheduling availability of UE switching between Uu uplink and V2X sidelink	1023
12.10	Selection / Reselection of relay UE	1024
12.10.1	Introduction	1024
12.10.2	Selection / Reselection of relay UE	1024
13	Measurement Performance Requirements for NR gNB	1024
13.1	UL-RTOA	1024
13.1.1	Report mapping	1024
13.1.1A	Additional Path Report Mapping for UL-RTOA	1026
13.2	gNB Rx-Tx time difference	1028
13.2.1	Report mapping	1028
13.2.1A	Additional Path Report Mapping for gNB Rx-Tx	1030
13.2.2	Measurement Accuracy Requirements	1032
13.2.2.1	Introduction	1032

13.3	UL SRS RSRP measurement.....	1033
13.3.1	Report mapping	1033
13.3.2	Measurement accuracy requirements.....	1034
13.3.2.1	Introduction.....	1034
13.3.2.2	Requirements	1034
13.4	AoA/ZoA	1035
13.4.1	Report mapping	1035
13.5	Timing advance (T_{ADV})	1035
13.5.1	Report mapping	1035
13.6	UL SRS RSRPP measurement	1036
13.6.1	Report mapping	1036
13.7	gNB Rx-Tx time difference measurements for RTT-based PDC.....	1037
13.7.1	Report mapping	1037
13.7.2	Measurement Accuracy Requirements	1038
13.7.2.1	Introduction.....	1038
13.7.2.2	Requirements	1038
Annex A (normative):	Test Cases	1039
A.1	Purpose of annex	1039
A.2	Requirement classification for statistical testing.....	1039
A.2.1	Types of requirements in TS 38.133	1039
A.2.1.1	Time and delay requirements on UE higher layer actions	1039
A.2.1.2	Measurements of power levels, relative powers and time	1039
A.2.1.3	Implementation requirements	1040
A.2.1.4	Physical layer timing requirements.....	1040
A.2.1.5	Requirements under CCA	1040
A.3	RRM test configurations	1040
A.3.1	Reference measurement channels.....	1040
A.3.1.1	PDSCH	1040
A.3.1.1.1	FDD.....	1040
A.3.1.1.2	TDD	1041
A.3.1.2	CORESET for RMSI scheduling	1044
A.3.1.2.1	FDD.....	1044
A.3.1.2.2	TDD	1045
A.3.1.3	CORESET for RMC scheduling	1047
A.3.1.3.1	FDD.....	1047
A.3.1.3.2	TDD	1048
A.3.1.4	TDD UL/DL configuration.....	1052
A.3.1A	Reference measurement channels under CCA	1053
A.3.1A.1	PDSCH	1053
A.3.1A.1.1	TDD	1053
A.3.1A.2	CORESET for RMSI scheduling	1054
A.3.1A.2.1	TDD	1054
A.3.1A.3	CORESET for RMC scheduling	1055
A.3.1A.3.1	TDD	1055
A.3.1A.4	TDD UL/DL configuration.....	1055
A.3.1A.5	RMC burst transmission model	1056
A.3.2	OFDMA channel noise generator (OCNG).....	1056
A.3.2.1	Generic OFDMA Channel Noise Generator (OCNG).....	1056
A.3.2.1.1	OCNG pattern 1: Generic OCNG pattern for all unused REs	1056
A.3.2.1.2	OCNG pattern 2: Generic OCNG pattern for all unused REs for 2AoA setup	1057
A.3.2.1.3	OCNG pattern 3: Generic OCNG pattern for unused REs in the same bandwidth as CORESET	1057
A.3.2.1.4	OCNG pattern 4: Generic OCNG pattern for all unused REs outside SSB slot(s).....	1057
A.3.2.2	Void	1059
A.3.3	Reference DRX configurations	1059
A.3.3.1	DRX Configuration 1: DRX cycle = 40 ms and TAT = 500 ms.....	1059
A.3.3.2	DRX Configuration 2: DRX cycle = 640 ms and TAT = 500 ms.....	1059
A.3.3.3	DRX Configuration 3: DRX cycle = 40 ms and TAT = Infinity	1059
A.3.3.4	DRX Configuration 4: DRX cycle = 160 ms and TAT = Infinity	1060
A.3.3.5	DRX Configuration 5: DRX cycle = 320 ms and TAT = Infinity	1060

A.3.3.6	DRX Configuration 6: DRX cycle = 320 ms and TAT = 500 ms	1060
A.3.3.7	DRX Configuration 7: DRX cycle = 640 ms and TAT = Infinity	1060
A.3.3.8	DRX Configuration 8: DRX cycle = 320 ms and TAT = Infinity	1061
A.3.3.9	DRX Configuration 9: DRX cycle = 40 ms and TAT = 500 ms	1061
A.3.3.10	DRX Configuration 10: DRX cycle = 640 ms and TAT = 500 ms	1061
A.3.3.11	DRX Configuration 11: DRX cycle = 20 ms and TAT = Infinity	1062
A.3.3.12	DRX Configuration 12: DRX cycle = 640 ms and TAT = Infinity	1062
A.3.3.13	DRX Configuration X1: DRX cycle = 80 ms and TAT = Infinity	1062
A.3.3.14	DRX Configuration 14: DRX cycle = 160 ms and TAT = Infinity	1062
A.3.4	Test Cases with Different Channel Bandwidths	1063
A.3.4.1	Test Cases with Different E-UTRA Channel Bandwidths	1063
A.3.4.1.1	Introduction	1063
A.3.4.1.2	Principle of testing	1063
A.3.5	Test Cases for Synchronous and Asynchronous DC Operations	1063
A.3.5.1	EN-DC Test Cases for Synchronous and Asynchronous EN-DC Operations	1063
A.3.5.1.1	Introduction	1063
A.3.5.1.2	Principle of Testing	1063
A.3.6	Antenna configurations	1063
A.3.6.1	Antenna configurations for FR1	1063
A.3.6.1.1	Antenna connection for 4 Rx capable UEs	1064
A.3.6.1.1.1	Introduction	1064
A.3.6.1.1.2	Principle of testing	1064
A.3.6.2	Antenna configurations for FR2	1066
A.3.6A	Antenna configurations with unlicensed bands	1066
A.3.6A.1	Antenna configurations for FR1	1066
A.3.6A.1.1	Antenna connection for 4 Rx capable UEs	1066
A.3.6A.1.1.1	Introduction	1066
A.3.6A.1.1.2	Principle of testing	1067
A.3.7	EN-DC test setup	1068
A.3.7.1	Introduction	1068
A.3.7.2	E-UTRAN Serving Cell Parameters	1068
A.3.7.2.1	E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR1	1068
A.3.7.2.2	E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR2	1069
A.3.7A	NR FR1-FR2 test setup	1070
A.3.7B	EN-DC test setup with unlicensed bands	1071
A.3.7B.1	Introduction	1071
A.3.7B.2	E-UTRAN Serving Cell Parameters	1071
A.3.7B.2.1	E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) under CCA in FR1	1071
A.3.7C	LTE-FR1/FR2 test setup	1072
A.3.7D	NE-DC test setup	1072
A.3.7D.1	Introduction	1072
A.3.7D.2	E-UTRAN Serving Cell Parameters	1072
A.3.7D.2.1	E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR1	1072
A.3.7D.2.2	E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR2	1072
A.3.8	PRACH configurations	1072
A.3.8.1	Introduction	1072
A.3.8.2	PRACH configurations in FR1	1073
A.3.8.2.1	FR1 PRACH configuration 1	1073
A.3.8.2.2	FR1 PRACH configuration 2	1073
A.3.8.2.3	FR1 PRACH configuration 3	1074
A.3.8.2.4	FR1 PRACH configuration 4	1075
A.3.8.3	PRACH configurations in FR2	1075
A.3.8.3.1	FR2 PRACH configuration 1	1075
A.3.8.3.2	FR2 PRACH configuration 2	1076
A.3.8.3.3	FR2 PRACH configuration 3	1077
A.3.8.3.4	FR2 PRACH configuration 4	1077
A.3.8A	PRACH configurations under CCA	1078
A.3.8A.1	Introduction	1078
A.3.8A.2	PRACH configurations in FR1	1078
A.3.8A.2.1	FR1 PRACH configuration 1 under CCA	1078
A.3.8A.2.2	FR1 PRACH configuration 2 under CCA	1079
A.3.9	BWP configurations	1080

A.3.9.1	Introduction.....	1080
A.3.9.2	Downlink BWP configurations.....	1080
A.3.9.2.1	Initial BWP	1080
A.3.9.2.2	Dedicated BWP.....	1080
A.3.9.3	Uplink BWP configurations.....	1081
A.3.9.3.1	Initial BWP	1081
A.3.9.3.2	Dedicated BWP.....	1081
A.3.9A	BWP configurations for RedCap.....	1082
A.3.9A.1	Introduction.....	1082
A.3.9A.2	Downlink BWP configurations.....	1082
A.3.9A.2.1	Dedicated BWP	1082
A.3.9A.3	Uplink BWP configurations.....	1082
A.3.9A.3.1	Dedicated BWP	1082
A.3.10	SSB Configurations.....	1083
A.3.10.1	SSB Configurations for FR1.....	1083
A.3.10.1.1	SSB pattern 1 in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz.....	1083
A.3.10.1.2	SSB pattern 2 in FR1: SSB allocation for SSB SCS=30 kHz in 40 MHz.....	1083
A.3.10.1.3	SSB pattern 3 in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz.....	1083
A.3.10.1.4	SSB pattern 4 in FR1: SSB allocation for SSB SCS=30 kHz in 40 MHz.....	1084
A.3.10.1.5	SSB pattern 5 in FR1: SSB allocation for SSB SCS=15 kHz starting from odd SFN in 10 MHz	1084
A.3.10.1.6	SSB pattern 6 in FR1: SSB allocation for SSB SCS=30 kHz starting from odd SFN in 40 MHz	1085
A.3.10.1.7	SSB pattern 7 in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz.....	1085
A.3.10.1.8	SSB pattern 8 in FR1: SSB allocation for SSB SCS=30 kHz in 40 MHz.....	1085
A.3.10.2	SSB Configurations for FR2.....	1086
A.3.10.2.1	SSB pattern 1 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz.....	1086
A.3.10.2.2	SSB pattern 2 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz.....	1086
A.3.10.2.3	SSB pattern 3 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz.....	1087
A.3.10.2.4	SSB pattern 4 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz.....	1087
A.3.10.2.5	SSB pattern 5 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz.....	1087
A.3.10.2.6	SSB pattern 6 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz.....	1088
A.3.10.2.7	SSB pattern 7 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz.....	1088
A.3.10.2.8	SSB pattern 8 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz.....	1088
A.3.10.2.9	SSB pattern 9 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz.....	1089
A.3.10.2.10	SSB pattern 10 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz.....	1089
A.3.10.2.11	SSB pattern 11 in FR2: SSB allocation for SSB SCS=480 kHz in 400 MHz.....	1090
A.3.10.2.12	SSB pattern 12 in FR2: SSB allocation for SSB SCS=960 kHz in 400 MHz.....	1090
A.3.10.2.13	SSB pattern 13 in FR2: SSB allocation for SSB SCS=480 kHz in 400 MHz.....	1090
A.3.10.2.14	SSB pattern 14 in FR2: SSB allocation for SSB SCS=960 kHz in 400 MHz.....	1091
A.3.10.2.15	SSB pattern 15 in FR2: SSB allocation for SSB SCS=480 kHz in 400 MHz.....	1091
A.3.10.2.16	SSB pattern 16 in FR2: SSB allocation for SSB SCS=960 kHz in 400 MHz.....	1092
A.3.10.2.17	SSB pattern 17 in FR2: SSB allocation for SSB SCS=480 kHz in 400 MHz.....	1092
A.3.10.2.18	SSB pattern 18 in FR2: SSB allocation for SSB SCS=960 kHz in 400 MHz.....	1092
A.3.10A	SSB Configurations under CCA.....	1093
A.3.10A.1	SSB Configurations under CCA for FR1.....	1093
A.3.10A.1.1	SSB pattern 1 under CCA for semi-static channel access: SSB allocation for SSB SCS=30kHz in 40MHz	1093
A.3.10A.1.2	SSB pattern 2 under CCA for dynamic channel access: SSB allocation for SSB SCS=30kHz in 40MHz	1093
A.3.10A.1.3	SSB pattern 3 under CCA for semi-static channel access: SSB allocation for SSB SCS=30 kHz in 40 MHz	1094
A.3.10A.1.4	SSB pattern 4 under CCA for dynamic channel access: SSB allocation for SSB SCS=30 kHz in 40 MHz	1094
A.3.10B	SSB Configurations for RedCap	1095
A.3.10B.1	SSB Configurations for FR1.....	1095
A.3.10B.1.1	SSB pattern 1 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz in 20 MHz.....	1095
A.3.10B.1.2	SSB pattern 2 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz in 20 MHz.....	1095
A.3.10B.1.3	SSB pattern 3 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz starting from odd SFN in 20 MHz	1096
A.3.10B.1.4	SSB pattern 4 for RedCap in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz.....	1096
A.3.10B.1.5	SSB pattern 5 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz in 20 MHz.....	1096
A.3.10B.1.6	SSB pattern 6 for RedCap in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz.....	1097
A.3.10B.1.7	SSB pattern 7 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz in 20 MHz.....	1097

A.3.10B.2	SSB Configurations for FR2.....	1098
A.3.10B.2.1	SSB pattern 1 for RedCap in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz.....	1098
A.3.10B.2.2	SSB pattern 2 for RedCap in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz.....	1098
A.3.10B.2.3	SSB pattern 3 for RedCap in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz.....	1099
A.3.10B.2.4	SSB pattern 4 for RedCap in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz.....	1099
A.3.10B.2.5	SSB pattern 5 for RedCap in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz.....	1099
A.3.11	SMTC Configurations	1100
A.3.11.1	SMTC pattern 1: SMTC period = 20 ms with SMTC duration = 1 ms.....	1100
A.3.11.2	SMTC pattern 2: SMTC period = 20 ms with SMTC duration = 5 ms.....	1100
A.3.11.3	SMTC pattern 3: SMTC period = 160 ms with SMTC duration = 1 ms.....	1100
A.3.11.4	SMTC pattern 4: SMTC period = 20 ms with SMTC duration = 1 ms.....	1100
A.3.11.5	SMTC pattern 5: SMTC period = 20 ms with SMTC duration = 5 ms.....	1101
A.3.11.6	SMTC pattern 6: SMTC period = 20 ms with SMTC duration = 5 ms.....	1101
A.3.11.7	SMTC pattern 7: SMTC period = 20 ms with SMTC duration = 5 ms.....	1101
A.3.11.8	SMTC pattern 8: SMTC period = 10 ms with SMTC duration = 1 ms.....	1101
A.3.11.9	SMTC pattern 9: SMTC period = 20 ms with SMTC duration = 1 ms.....	1101
A.3.11A	SMTC Configurations for RedCap.....	1102
A.3.11A.1	SMTC pattern 1 for RedCap: SMTC period = 40 ms with SMTC duration = 1 ms	1102
A.3.11A.2	SMTC pattern 2 for RedCap: SMTC period = 80 ms with SMTC duration = 1 ms	1102
A.3.11A.3	SMTC pattern 3 for RedCap: SMTC period = 40 ms with SMTC duration = 1 ms	1102
A.3.11A.4	SMTC pattern 4 for RedCap: SMTC period = 80 ms with SMTC duration = 5 ms	1102
A.3.12	Test Cases with Different CC Configurations	1102
A.3.12.1	EN-DC Test Cases with Different EN-DC Configurations	1102
A.3.12.1.1	Introduction.....	1102
A.3.12.1.2	Principle of testing	1103
A.3.12.2	Carrier Aggregation Test Cases with Different CA Configurations	1103
A.3.12.2.1	Introduction.....	1103
A.3.12.2.2	Principle of testing	1103
A.3.13	Test Cases in SA and EN-DC Operations	1103
A.3.13.1	Introduction.....	1103
A.3.13.2	Principle of Testing.....	1103
A.3.13A	Test Cases involving E-UTRA/FR1 and FR2 carriers.....	1104
A.3.13A.1	Introduction.....	1104
A.3.13A.2	Principle of Testing in EN-DC	1104
A.3.13A.3	Principle of Testing in SA	1104
A.3.13A.4	Principle of Testing in E-UTRA	1105
A.3.13B	Test Cases for EN-DC and NE-DC Operations.....	1106
A.3.13B.1	Active BWP switch Test Cases for EN-DC and NE-DC Operations.....	1106
A.3.13B.1.1	Introduction.....	1106
A.3.13B.1.2	Principle of Testing	1106
A.3.13B.2	SFTD accuracy Test Cases for EN-DC and NE-DC Operations	1106
A.3.13B.2.1	Introduction.....	1106
A.3.13B.2.2	Principle of Testing.....	1106
A.3.14	CSI-RS configurations	1106
A.3.14.1	FDD	1106
A.3.14.2	TDD.....	1108
A.3.15	Angle of Arrival (AoA) for FR2 RRM test cases.....	1113
A.3.15.1	Setup 1: Single AoA in Rx beam peak direction	1113
A.3.15.2	Setup 2: Single AoA in non Rx beam peak direction	1113
A.3.15.2.1	Setup 2a: Single AoA in non Rx beam peak direction without change in direction	1113
A.3.15.2.2	Setup 2b: Single AoA in non Rx beam peak direction with change in direction	1114
A.3.15.3	Setup 3: 2 AoAs.....	1114
A.3.15.4	Setup 4: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak.....	1114
A.3.15.4.1	Setup 4a: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak without change in direction	1114
A.3.15.4.2	Setup 4b: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak with change in direction	1114
A.3.16	TCI State Configuration	1115
A.3.16.1	Introduction.....	1115
A.3.16.2	TCI states.....	1115
A.3.16A	Unified TCI State Configuration.....	1115
A.3.16A.1	Introduction.....	1115

A.3.16A.2	DLorJoint TCI states.....	1115
A.3.16A.3	UL TCI states.....	1116
A.3.17	Configurations of CSI-RS for tracking.....	1116
A.3.17.1	Configuration of CSI-RS for tracking for FR1	1116
A.3.17.1.1	FDD.....	1116
A.3.17.1.2	TDD	1118
A.3.17.2	Configuration of CSI-RS for tracking for FR2	1119
A.3.17.2.1	TDD	1119
A.3.18	Additional definitions related to OTA testing for FR2 RRM test cases	1121
A.3.18.1	Introduction.....	1121
A.3.18.2	PRACH Power Measurement	1121
A.3.19	Test applicability for DAPS handover.....	1121
A.3.19.1	Introduction.....	1121
A.3.19.2	Principle of testing	1121
A.3.20	MsgA configurations.....	1122
A.3.20.1	Introduction.....	1122
A.3.20.2	MsgA configurations in FR1	1122
A.3.20.2.1	FR1 MsgA configuration 1	1122
A.3.20.2.2	FR1 MsgA configuration 2	1123
A.3.20.3	MsgA configurations in FR2	1124
A.3.20.3.1	FR2 MsgA configuration 1	1124
A.3.20.3.2	FR2 MsgA configuration 2	1125
A.3.20A	MsgA configurations under CCA.....	1126
A.3.20A.1	Introduction.....	1126
A.3.20A.2	MsgA configurations in FR1	1126
A.3.20A.2.1	FR1 MsgA configuration 1 under CCA	1126
A.3.20A.2.2	FR1 MsgA configuration 2 under CCA	1127
A.3.21	V2X sidelink communication.....	1128
A.3.21.1	Introduction.....	1128
A.3.21.2	Reference resource pool configurations for V2X Sidelink Communication.....	1128
A.3.21.3	Reference measurement channels for V2X Sidelink Communication.....	1131
A.3.21.4	Reference SL-DRX configurations.....	1132
A.3.21.4.1	SL-DRX Configuration 1: SL-DRX cycle = 40 ms	1132
A.3.21.4.2	SL-DRX Configuration 2: SL-DRX cycle = 320 ms	1132
A.3.21.4.3	SL-DRX Configuration 3: SL-DRX cycle = 640 ms	1132
A.3.22	CSI-IM configurations	1133
A.3.22.1	FDD	1133
A.3.22.2	TDD.....	1133
A.3.23	Spatial Relation Configuration.....	1135
A.3.23.1	Introduction.....	1135
A.3.23.2	Spatial Relation.....	1135
A.3.24	SRS configuration	1135
A.3.25	Channel bandwidth (CBW) configurations	1138
A.3.25.1	DL UE specific CBW	1138
A.3.25.2	UL UE specific CBW	1138
A.3.26	CCA model.....	1138
A.3.26.1	Introduction.....	1138
A.3.26.2	CCA model for operation on a carrier frequency with CCA in FR1	1138
A.3.26.2.1	DL CCA model	1138
A.3.26.2.2	UL CCA model	1140
A.3.26.3	CCA model for operation on a carrier frequency with CCA in FR2-2	1141
A.3.26.3.1	DL CCA model	1141
A.3.26.3.2	UL CCA model	1141
A.3.27	Test Cases with at Least One Cell on a Carrier Frequency with CCA	1142
A.3.27.1	Introduction.....	1142
A.3.27.2	NR Standalone Tests with NR SCell under CCA and All Other NR Cells in FR1.....	1142
A.3.27.3	EN-DC Tests with NR PSCell under CCA and Other NR Cells in FR1.....	1142
A.3.27.4	NR Standalone Tests with NR PCell under CCA and Other NR Cells in FR1.....	1142
A.3.27.5	E-UTRA Standalone Tests with at Least One NR Cell under CCA	1142
A.3.28	Discovery Burst Transmission Window configuration under CCA	1142
A.3.28.1	DBT Window pattern 1: DBT Window period = 20 ms with DBT Window duration = 1 ms	1142
A.3.29	Testing principles for UE capable of only NR bands with shared spectrum access	1143

A.3.29.1	Introduction.....	1143
A.3.29.2	Principle of testing for UE capable of EN-DC with only NR bands with shared spectrum access.....	1143
A.3.29.3	Principle of testing for UE capable of SA operation with only NR bands with shared spectrum access.....	1143
A.3.30	CSI-RS configurations for RRM.....	1143
A.3.30.1	FDD.....	1143
A.3.30.2	TDD.....	1144
A.3.31	PRS Configurations.....	1146
A.3.31.1	PRS Configurations for FR1.....	1146
A.3.31.1.1	PRS pattern 1 in FR1: SCS=15 KHz.....	1146
A.3.31.1.2	PRS pattern 2 in FR1: SCS=30 KHz.....	1146
A.3.31.2	PRS Configurations for FR2.....	1146
A.3.31.2.1	PRS pattern 1 in FR2: SCS=120 KHz.....	1146
A.3.32	NR sidelink discovery	1147
A.3.32.1	Introduction.....	1147
A.3.32.2	Reference resource pool configurations for NR Sidelink Discovery	1147
A.3.32.3	Principle of Testing.....	1147
A.3.33	PRS Processing Window (PPW) configurations	1148
A.3.34	Testing principles for test cases related to PRS measurements	1148
A.3.34.1	Introduction.....	1148
A.3.34.2	Test cases in RRC_INACTIVE state	1148
A.3.34.3	Test cases for PRS measurements with gaps in RRC_CONNECTED state	1148
A.3.34.4	Test cases for PRS measurements without gaps in RRC_CONNECTED state	1149
A.3.35	Testing principle for RedCap UE	1149
A.3.35.1	Introduction.....	1149
A.3.35.2	Principle of testing for FR1	1149
A.3.35.3	Principle of testing for FR2	1150
A.3.36	Testing related to Satellite access.....	1150
A.3.36.1	Introduction.....	1150
A.3.36.2	Principle of testing GSO and NGSO scenarios.....	1150
A.3.36.2	Principle of testing different RRM requirements.....	1150
A.3.36.3	Principle of testing different ephemeris formats.....	1151
A.3.36.4	General setup for SIB19	1152
A.3.36.5	Satellite specific parameters configuration.....	1153
A.3.36.5.1	Satellite specific configuration for serving cell.....	1153
A.3.36.5.2	Satellite specific configuration for neighbour cell	1153
A.4	EN-DC tests with all NR cells in FR1.....	1155
A.4.1	Void.....	1155
A.4.2	Void.....	1155
A.4.3	RRC_CONNECTED state mobility	1155
A.4.3.1	Void.....	1155
A.4.3.2	RRC Connection Mobility Control.....	1155
A.4.3.2.1	Void.....	1155
A.4.3.2.2	Random Access.....	1155
A.4.3.2.2.1	4-step RA type contention based random access test in FR1 for PSCell in EN-DC.....	1155
A.4.3.2.2.2	4-step RA type n on-contention based random access test in FR1 for PSCell in EN-DC	1158
A.4.3.2.2.3	2-step RA type contention based random access test in FR1 for PSCell in EN-DC.....	1161
A.4.3.2.2.4	2-step RA type n on-contention based random access test in FR1 for PSCell in EN-DC	1163
A.4.3.2.3	Void.....	1166
A.4.3.3	Handover with PSCell from EN-DC to EN-DC with known target PSCell in FR1.....	1166
A.4.3.3.1	Test Purpose and Environment	1166
A.4.3.3.2	Test Requirements.....	1170
A.4.4	Timing	1171
A.4.4.1	UE transmit timing	1171
A.4.4.1.1	NR UE Transmit Timing Test for FR1	1171
A.4.4.1.1.1	Test Purpose and environment	1171
A.4.4.1.1.2	Test requirements	1174
A.4.4.2	UE timer accuracy	1174
A.4.4.3	Timing advance	1174
A.4.4.3.1	EN-DC FR1 timing advance adjustment accuracy.....	1174
A.4.4.3.1.1	Test Purpose and Environment.....	1174

A.4.4.3.1.2	Test Parameters	1174
A.4.4.3.1.3	Test Requirements	1177
A.4.5	Signaling characteristics	1177
A.4.5.1	Radio link Monitoring	1177
A.4.5.1.1	Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with SSB-based RLM RS in non-DRX mode	1178
A.4.5.1.1.1	Test Purpose and Environment	1178
A.4.5.1.1.2	Test Requirements	1181
A.4.5.1.2	Radio Link Monitoring In-sync Test for FR1 PSCell configured with SSB-based RLM RS in non-DRX mode	1181
A.4.5.1.2.1	Test Purpose and Environment	1181
A.4.5.1.2.2	Test Requirements	1185
A.4.5.1.3	Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with SSB-based RLM RS in DRX mode	1185
A.4.5.1.3.1	Test Purpose and Environment	1185
A.4.5.1.3.2	Test Requirements	1188
A.4.5.1.4	Radio Link Monitoring In-sync Test for FR1 PSCell configured with SSB-based RLM RS in DRX mode	1189
A.4.5.1.4.1	Test Purpose and Environment	1189
A.4.5.1.4.2	Test Requirements	1192
A.4.5.1.5	EN-DC Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with CSI-RS-based RLM in non-DRX mode	1192
A.4.5.1.5.1	Test Purpose and Environment	1192
A.4.5.1.5.2	Test Requirements	1195
A.4.5.1.6	EN-DC Radio Link Monitoring In-sync Test for FR1 PSCell configured with CSI-RS-based RLM in non-DRX mode	1196
A.4.5.1.6.1	Test Purpose and Environment	1196
A.4.5.1.6.2	Test Requirements	1199
A.4.5.1.7	EN-DC Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with CSI-RS-based RLM in DRX mode	1199
A.4.5.1.7.1	Test Purpose and Environment	1199
A.4.5.1.7.2	Test Requirements	1202
A.4.5.1.8	EN-DC Radio Link Monitoring In-sync Test for FR1 PSCell configured with CSI-RS-based RLM in DRX mode	1203
A.4.5.1.8.1	Test Purpose and Environment	1203
A.4.5.1.8.2	Test Requirements	1206
A.4.5.1.9	Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion	1207
A.4.5.1.9.1	Test Purpose and Environment	1207
A.4.5.2	Interruption	1210
A.4.5.2.1	E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC	1210
A.4.5.2.1.1	Test Purpose and Environment	1210
A.4.5.2.1.2	Test Requirements	1212
A.4.5.2.2	E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC	1213
A.4.5.2.2.1	Test Purpose and Environment	1213
A.4.5.2.2.2	Test Requirements	1215
A.4.5.2.3	E-UTRAN – NR FR1 interruptions during measurements on deactivated NR SCC in synchronous EN-DC	1215
A.4.5.2.3.1	Test Purpose and Environment	1215
A.4.5.2.3.2	Test Requirements	1219
A.4.5.2.4	E-UTRAN – NR FR1 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC	1220
A.4.5.2.4.1	Test Purpose and Environment	1220
A.4.5.2.4.2	Test Requirements	1224
A.4.5.2.5	E-UTRAN – NR FR1 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC	1225
A.4.5.2.5.1	Test Purpose and Environment	1225
A.4.5.2.5.2	Test Requirements	1227
A.4.5.2.6	E-UTRAN – NR FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC	1227

A.4.5.2.6.1	Test Purpose and Environment.....	1227
A.4.5.2.6.2	Test Requirements.....	1230
A.4.5.2.7	Void.....	1230
A.4.5.2.8	E-UTRAN - NR FR1 interruptions at NR SRS carrier based switching in asynchronous EN-DC....	1230
A.4.5.2.8.1	Test Purpose and Environment.....	1230
A.4.5.2.8.2	Test Requirements.....	1233
A.4.5.2.9	E-UTRAN – NR interruptions at E-UTRA SRS carrier based switching.....	1233
A.4.5.2.9.1	Test Purpose and Environment.....	1233
A.4.5.2.9.2	Test Requirements.....	1236
A.4.5.2.10	E-UTRAN – NR FR1 interruptions due to RRM and RLM/BFD measurements on deactivated NR PSCell	1236
A.4.5.2.10.1	Test Purpose and Environment.....	1236
A.4.5.2.10.2	Test Requirements.....	1238
A.4.5.2.11	E-UTRAN - NR FR1 interruptions at NR SRS antenna port switching with 1 SRS symbol in a slot in synchronous EN-DC	1239
A.4.5.2.11.1	Test Purpose and Environment.....	1239
A.4.5.2.11.2	Test Requirements.....	1242
A.4.5.2.12	E-UTRAN - NR FR1 interruptions at NR SRS antenna port switching in asynchronous EN-DC....	1242
A.4.5.2.12.1	Test Purpose and Environment.....	1242
A.4.5.3	SCell Activation and Deactivation Delay	1247
A.4.5.3.1	SCell Activation and deactivation of known SCell in FR1 for 160ms SCell measurement cycle	1247
A.4.5.3.1.1	Test Purpose and Environment.....	1247
A.4.5.3.1.2	Test Requirements.....	1252
A.4.5.3.2	SCell Activation and deactivation of known SCell in FR1 for 640ms SCell measurement cycle	1253
A.4.5.3.2.1	Test Purpose and Environment.....	1253
A.4.5.3.2.2	Test Requirements.....	1253
A.4.5.3.3	SCell Activation and deactivation of unknown SCell in FR1	1254
A.4.5.3.3.1	Test Purpose and Environment.....	1254
A.4.5.3.3.2	Test Requirements.....	1255
A.4.5.3.4	SCell Activation and deactivation of multiple unknown SCells in FR1 with single activation/deactivation command.....	1255
A.4.5.3.4.1	Test Purpose and Environment.....	1255
A.4.5.3.4.2	Test Requirements.....	1258
A.4.5.3.5	Direct SCell activation at SCell addition of known SCell in FR1.....	1258
A.4.5.3.5.1	Test Purpose and Environment.....	1258
A.4.5.3.5.2	Test Requirements.....	1263
A.4.5.3.6	Fast SCell Activation of known SCell in FR1 for 160ms SCell measurement cycle	1263
A.4.5.3.6.1	Test Purpose and Environment.....	1263
A.4.5.3.6.2	Test Requirements.....	1267
A.4.5.3.7	Fast SCell Activation of known SCell in FR1 for 640 ms SCell measurement cycle	1268
A.4.5.3.7.1	Test Purpose and Environment.....	1268
A.4.5.3.7.2	Test Requirements.....	1268
A.4.5.4	UE UL carrier RRC reconfiguration Delay	1268
A.4.5.4.1	UE UL carrier RRC reconfiguration Delay.....	1268
A.4.5.4.1.1	Test Purpose and Environment.....	1268
A.4.5.4.1.2	Test Requirements.....	1275
A.4.5.5	Beam Failure Detection and Link recovery procedures.....	1275
A.4.5.5.1	EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in non-DRX mode	1275
A.4.5.5.1.1	Test Purpose and Environment.....	1275
A.4.5.5.1.2	Test Requirements.....	1279
A.4.5.5.2	EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in DRX mode.....	1279
A.4.5.5.2.1	Test Purpose and Environment.....	1279
A.4.5.5.2.2	Test Requirements.....	1283
A.4.5.5.3	EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with CSI-RS-based BFD and LR in non-DRX mode	1284
A.4.5.5.3.1	Test Purpose and Environment.....	1284
A.4.5.5.3.2	Test Requirements.....	1288
A.4.5.5.4	EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with CSI-RS-based BFD and LR in DRX mode.....	1288
A.4.5.5.4.1	Test Purpose and Environment.....	1288

A.4.5.5.4.2	Test Requirements	1293
A.4.5.5.5	EN-DC Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode	1293
A.4.5.5.5.1	Test Purpose and Environment.....	1293
A.4.5.5.5.2	Test Requirements	1297
A.4.5.5.6	EN-DC Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in DRX mode	1298
A.4.5.5.6.1	Test Purpose and Environment.....	1298
A.4.5.5.6.2	Test Requirements	1302
A.4.5.5.7	EN-DC TRP specific Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in non-DRX mode	1303
A.4.5.5.7.1	Test Purpose and Environment.....	1303
A.4.5.5.7.2	Test Requirements	1307
A.4.5.5.8	EN-DC TRP specific Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode	1308
A.4.5.5.8.1	Test Purpose and Environment.....	1308
A.4.5.5.8.2	Test Requirements	1312
A.4.5.6	Active BWP switch.....	1313
A.4.5.6.1	DCI-based and Timer-based Active BWP Switch	1313
A.4.5.6.1.1	E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC	1313
A.4.5.6.1.2	E-UTRAN – NR PSCell FR1 DL active BWP switch with FR1 SCell in non-DRX in synchronous EN-DC.....	1317
A.4.5.6.2	RRC-based Active BWP Switch	1323
A.4.5.6.3	Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs.....	1326
A.4.5.6.3.1	Simultaneous E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in EN-DC on multiple CCs	1326
A.4.5.6.3.1.1	Test Purpose and Environment	1326
A.4.5.6.4	Simultaneous RRC-based Active BWP Switch on multiple CCs	1332
A.4.5.6.4.1	E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC on multiple CCs.....	1332
A.4.5.6.4.1.1	Test Purpose and Environment	1332
A.4.5.6.4.1.2	Test Requirements	1336
A.4.5.6.4.2	E-UTRAN – NR FR1 PSCell SCell dormancy switch of two FR1 SCells inside active time.....	1336
A.4.5.6.4.2.1	Test Purpose and Environment	1336
A.4.5.6.4.2.2	Test Requirements	1343
A.4.5.6.5	SCell dormancy switch	1343
A.4.5.6.5.1	E-UTRAN – NR FR1 PSCell SCell dormancy switch of single FR1 SCell outside active time.....	1343
A.4.5.6.5.2	E-UTRAN – NR FR1 PSCell SCell dormancy switch of two FR1 SCells inside active time.....	1349
A.4.5.6.5.2.1	Test Purpose and Environment	1349
A.4.5.6.5.2.2	Test Requirements	1353
A.4.5.7	PSCell addition and release delay.....	1353
A.4.5.7.1	Addition and Release Delay of known NR PSCell	1353
A.4.5.7.1.1	Test purpose and environment.....	1353
A.4.5.7.1.2	Test Requirements	1356
A.4.5.8	DL Interruptions at switching between two uplink carriers	1357
A.4.5.8.1	Test Purpose and Environment	1357
A.4.5.8.2	Test Requirements.....	1359
A.4.5.9	UE specific CBW change	1360
A.4.5.9.1	UE specific CBW change on FR1 NR PSCell with non-DRX in synchronous EN- DC	1360
A.4.5.9.1.1	Test Purpose and Environment.....	1360
A.4.5.9.1.2	Test Requirements	1363
A.4.5.10	PSCell activation and deactivation delay.....	1363
A.4.5.10.1	PSCell activation and deactivation delay	1363
A.4.5.10.1.1	Test purpose and environment.....	1363
A.4.5.10.1.2	Test Requirements	1365
A.4.5.11	Conditional PSCell addition and release delay (FR1 EN-DC)	1366
A.4.5.11.1	Conditional PSCell Addition and Release Delay	1366
A.4.5.11.1.1	Test purpose and environment.....	1366
A.4.5.11.1.2	Test Parameters	1366
A.4.5.11.1.3	Test Requirements	1369
A.4.6	Measurement procedure	1369
A.4.6.1	Intra-frequency Measurements	1369

A.4.6.1.1	EN-DC event triggered reporting tests without gap under non-DRX	1369
A.4.6.1.1.1	Test purpose and Environment	1369
A.4.6.1.1.2	Test parameters.....	1369
A.4.6.1.1.3	Test Requirements	1371
A.4.6.1.2	EN-DC event triggered reporting tests without gap under DRX.....	1372
A.4.6.1.2.1	Test purpose and Environment	1372
A.4.6.1.2.2	Test parameters.....	1372
A.4.6.1.2.2	Test Requirements	1374
A.4.6.1.3	EN-DC event triggered reporting tests with per-UE gaps under non-DRX	1374
A.4.6.1.3.1	Test purpose and Environment	1374
A.4.6.1.3.2	Test parameters.....	1374
A.4.6.1.3.3	Test Requirements	1377
A.4.6.1.4	EN-DC event triggered reporting tests with per-UE gaps under DRX	1377
A.4.6.1.4.1	Test purpose and Environment	1377
A.4.6.1.4.2	Test parameters.....	1377
A.4.6.1.4.3	Test Requirements	1380
A.4.6.1.5	EN-DC event triggered reporting tests without gap under non-DRX with SSB index reading	1380
A.4.6.1.5.1	Test purpose and Environment	1380
A.4.6.1.5.2	Test parameters.....	1380
A.4.6.1.5.3	Test Requirements	1382
A.4.6.1.6	EN-DC event triggered reporting tests with SSB index reading with per-UE gaps	1382
A.4.6.1.6.1	Test purpose and Environment	1382
A.4.6.1.6.2	Test parameters.....	1382
A.4.6.1.6.3	Test Requirements	1384
A.4.6.1.7	EN-DC event triggered reporting tests under DRX for UE configured with highSpeedMeasFlag-r16	1384
A.4.6.1.7.1	Test purpose and Environment	1384
A.4.6.1.7.2	Test parameters.....	1384
A.4.6.1.7.3	Test Requirements	1387
A.4.6.1.8	EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used for UE configured with <i>highSpeedMeasCA-Scell-r17</i>	1387
A.4.6.1.8.1	Test Purpose and Environment.....	1387
A.4.6.1.8.2	Test Requirements	1391
A.4.6.2	Inter-frequency Measurements	1391
A.4.6.2.1	EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is not used	1391
A.4.6.2.1.1	Test Purpose and Environment.....	1391
A.4.6.2.1.2	Test Requirements	1394
A.4.6.2.2	EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used.....	1394
A.4.6.2.2.1	Test Purpose and Environment.....	1394
A.4.6.2.2.2	Test Requirements	1397
A.4.6.2.3	Void.....	1398
A.4.6.2.4	Void.....	1398
A.4.6.2.5	EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is not used	1398
A.4.6.2.5.1	Test Purpose and Environment.....	1398
A.4.6.2.5.2	Test Requirements	1401
A.4.6.2.6	EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is used	1401
A.4.6.2.6.1	Test Purpose and Environment.....	1401
A.4.6.2.6.2	Test Requirements	1404
A.4.6.2.7	Void.....	1404
A.4.6.2.8	Void.....	1404
A.4.6.2.9	EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used for UE configured with <i>highSpeedMeasInterFreq-r17</i>	1405
A.4.6.2.9.1	Test Purpose and Environment.....	1405
A.4.6.2.9.2	Test Requirements	1408
A.4.6.3	Void	1408
A.4.6.4	L1-RSRP measurement for beam reporting	1408
A.4.6.4.1	SSB based L1-RSRP measurement when DRX is not used.....	1408
A.4.6.4.1.1	Test Purpose and Environment.....	1408

A.4.6.4.1.2	Test parameters.....	1408
A.4.6.4.1.3	Test Requirements.....	1410
A.4.6.4.2	SSB based L1-RSRP measurement when DRX is used	1410
A.4.6.4.2.1	Test Purpose and Environment.....	1410
A.4.6.4.2.2	Test parameters.....	1411
A.4.6.4.2.3	Test Requirements.....	1413
A.4.6.4.3	CSI-RS based L1-RSRP measurement when DRX is not used.....	1413
A.4.6.4.3.1	Test Purpose and Environment.....	1413
A.4.6.4.3.2	Test parameters.....	1413
A.4.6.4.3.3	Test Requirements.....	1415
A.4.6.4.4	CSI-RS based L1-RSRP measurement when DRX is used.....	1415
A.4.6.4.4.1	Test Purpose and Environment.....	1415
A.4.6.4.4.2	Test parameters.....	1415
A.4.6.4.4.3	Test Requirements.....	1417
A.4.6.4.5	SSB based L1-RSRP measurement when DRX is used for UE configured with <i>highSpeedMeasFlag-r16</i>	1417
A.4.6.4.5.1	Test Purpose and Environment.....	1417
A.4.6.4.5.2	Test parameters.....	1418
A.4.6.4.5.3	Test Requirements.....	1420
A.4.6.5	CLI measurements	1420
A.4.6.5.1	SRS-RSRP measurement with non-DRX.....	1420
A.4.6.5.1.1	Test Purpose and Environment.....	1420
A.4.6.5.1.2	Test Parameters	1420
A.4.6.5.1.3	Test Requirements.....	1422
A.4.6.5.2	CLI-RSSI measurement with non-DRX.....	1423
A.4.6.5.2.1	Test Purpose and Environment.....	1423
A.4.6.5.2.2	Test Parameters	1423
A.4.6.5.2.3	Test Requirements.....	1424
A.4.6.6.1.2	Test Requirements.....	1427
A.4.6.7	L1-SINR measurement for beam reporting	1428
A.4.6.7.2	L1-SINR measurement with SSB based CMR and dedicated IMR when DRX is used	1430
A.4.6.7.2.1	Test Purpose and Environment.....	1430
A.4.6.7.2.2	Test parameters.....	1431
A.4.6.7.2.3	Test Requirements.....	1433
A.4.6.7.3	L1-SINR measurement with CSI-RS based CMR and dedicated IMR configured when DRX is used	1433
A.4.6.7.3.1	Test Purpose and Environment.....	1433
A.4.6.7.3.2	Test parameters.....	1433
A.4.6.7.3.3	Test Requirements.....	1435
A.4.6.8	CSI-RS based intra-frequency Measurement.....	1435
A.4.6.8.1	EN-DC event triggered reporting tests without gap under DRX.....	1435
A.4.6.8.1.1	Test purpose and Environment.....	1435
A.4.6.8.1.2	Test Requirements.....	1438
A.4.6.9	CSI-RS based inter-frequency Measurement.....	1438
A.4.6.9.1	EN-DC event triggered reporting tests for FR1 cell when non-DRX is used.....	1438
A.4.6.9.1.1	Test Purpose and Environment.....	1438
A.4.6.9.1.2	Test Requirements.....	1441
A.4.7	Measurement Performance requirements	1442
A.4.7.1	SS-RSRP.....	1442
A.4.7.1.1	EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell.....	1442
A.4.7.1.1.1	Test Purpose and Environment.....	1442
A.4.7.1.1.2	Test parameters.....	1442
A.4.7.1.1.3	Test Requirements.....	1445
A.4.7.1.2	EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell	1445
A.4.7.1.2.1	Test Purpose and Environment.....	1445
A.4.7.1.2.2	Test parameters.....	1445
A.4.7.1.2.3	Test Requirements.....	1448
A.4.7.1.3	Void.....	1448
A.4.7.2	SS-RSRQ.....	1448
A.4.7.2.1	EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell.....	1448
A.4.7.2.1.1	Test Purpose and Environment.....	1448
A.4.7.2.1.2	Test Parameters	1449

A.4.7.2.1.3	Test Requirements	1452
A.4.7.2.2	EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell	1452
A.4.7.2.2.1	Test Purpose and Environment	1452
A.4.7.2.2.2	Test Parameters	1452
A.4.7.2.2.3	Test Requirements	1456
A.4.7.3	SS-SINR	1456
A.4.7.3.1	EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell	1456
A.4.7.3.1.1	Test Purpose and Environment	1456
A.4.7.3.1.2	Test Parameters	1456
A.4.7.3.1.3	Test Requirements	1459
A.4.7.3.2	EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell	1459
A.4.7.3.2.1	Test Purpose and Environment	1459
A.4.7.3.2.2	Test Parameters	1459
A.4.7.3.2.3	Test Requirements	1462
A.4.7.4	L1-RSRP measurement for beam reporting	1463
A.4.7.4.1	SSB based L1-RSRP measurement	1463
A.4.7.4.1.1	Test Purpose and Environment	1463
A.4.7.4.1.2	Test parameters	1463
A.4.7.4.1.3	Test Requirements	1466
A.4.7.4.2	CSI-RS based L1-RSRP measurement on resource set with repetition off	1466
A.4.7.4.2.1	Test Purpose and Environment	1466
A.4.7.4.2.2	Test parameters	1466
A.4.7.4.2.3	Test Requirements	1469
A.4.7.5	SFTD accuracy	1469
A.4.7.5.1	SFTD accuracy	1469
A.4.7.5.1.1	Test Purpose and Environment	1469
A.4.7.5.1.2	Test Parameters	1469
A.4.7.5.1.3	Test Requirements	1472
A.4.7.5.2	Void	1472
A.4.7.5.3	Void	1472
A.4.7.6	CLI measurements	1472
A.4.7.6.1	EN-DC SRS-RSRP measurement accuracy with FR1 serving cell	1472
A.4.7.6.1.1	Test Purpose and Environment	1472
A.4.7.6.1.2	Test parameters	1473
A.4.7.6.1.3	Test Requirements	1476
A.4.7.6.2	EN-DC CLI-RSSI measurement accuracy with FR1 serving cell	1476
A.4.7.6.2.1	Test Purpose and Environment	1476
A.4.7.6.2.2	Test parameters	1476
A.4.7.6.2.3	Test Requirements	1478
A.4.7.7	L1-SINR measurement for beam reporting	1478
A.4.7.7.2	L1-SINR measurement with SSB based CMR and dedicated IMR	1482
A.4.7.7.2.1	Test Purpose and Environment	1482
A.4.7.7.2.2	Test parameters	1482
A.4.7.7.2.3	Test Requirements	1485
A.4.7.7.3	L1-SINR measurement with CSI-RS based CMR and dedicated IMR	1486
A.4.7.7.3.1	Test Purpose and Environment	1486
A.4.7.7.3.2	Test parameters	1486
A.4.7.7.3.3	Test Requirements	1489
A.4.7.8	CSI-RSRP	1489
A.4.7.8.1	EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell	1489
A.4.7.8.1.1	Test Purpose and Environment	1489
A.4.7.8.1.2	Test parameters	1489
A.4.7.8.1.3	Test Requirements	1493
A.4.7.8.2	EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell	1493
A.4.7.8.2.1	Test Purpose and Environment	1493
A.4.7.8.2.2	Test parameters	1493
A.4.7.8.2.3	Test Requirements	1497
A.4.7.9	CSI-RSRQ	1497
A.4.7.9.1	EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell	1497
A.4.7.9.1.1	Test Purpose and Environment	1497
A.4.7.9.1.2	Test Parameters	1497
A.4.7.9.1.3	Test Requirements	1501

A.4.7.9.2	EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell.....	1501
A.4.7.9.2.1	Test Purpose and Environment.....	1501
A.4.7.9.2.2	Test Parameters	1501
A.4.7.9.2.3	Test Requirements	1505
A.4.7.10	CSI-SINR.....	1505
A.4.7.10.1	EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell.....	1505
A.4.7.10.1.1	Test Purpose and Environment.....	1505
A.4.7.10.1.2	Test Parameters	1505
A.4.7.10.1.3	Test Requirements	1508
A.4.7.10.2	EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell.....	1509
A.4.7.10.2.1	Test Purpose and Environment.....	1509
A.4.7.10.2.2	Test Parameters	1509
A.4.7.10.2.3	Test Requirements	1512
A.4.8	Void.....	1512
A.4A	NE-DC test with all NR cells in FR1	1512
A.4A.1	Signaling characteristics.....	1512
A.4A.1.1	E-UTRAN PSCell addition.....	1512
A.4A.1.1.1	Test purpose and environment	1512
A.4A.1.1.2	Test Requirements.....	1516
A.4A.1.2	Active BWP switch.....	1517
A.4A.1.2.1	E-UTRAN PSCell – NR PCell FR1 DCI-based and Timer-based DL active BWP switch in non- DRX in synchronous NE-DC	1517
A.4A.1.2.1.1	Test Purpose and Environment.....	1517
A.4A.1.2.1.2	Test Requirements	1520
A.4A.1.3	Intra-frequency handover with E-UTRAN PSCell	1521
A.4A.1.3.1	Test purpose and environment	1521
A.4A.1.3.2	Test Requirements.....	1525
A.4A.1.4	Handover with PSCell from NE-DC to NE-DC with unknown target PSCell.....	1525
A.4A.1.4.1	Test Purpose and Environment	1525
A.4A.1.4.2	Test Parameters	1525
A.4A.1.4.3	Test Requirements.....	1528
A.4A.1.4.3.1	Test Requirements for NR HO	1528
A.4A.1.4.3.2	Test Requirements for LTE PSCell Change	1529
A.4A.2	Measurement performance	1529
A.4A.2.1	SFTD accuracy	1529
A.4A.2.1.1	SFTD accuracy.....	1529
A.4A.2.1.1.1	Test Purpose	1529
A.4A.2.1.1.2	Test Environment	1530
A.4A.2.1.1.3	Test Requirements	1533
A.5	EN-DC tests with one or more NR cells in FR2	1533
A.5.1	Void.....	1533
A.5.2	Void.....	1533
A.5.3	RRC_CONNECTED state mobility	1533
A.5.3.1	Void.....	1533
A.5.3.2	RRC Connection Mobility Control.....	1533
A.5.3.2.1	Void.....	1533
A.5.3.2.2	Random Access.....	1533
A.5.3.2.2.1	4-step RA type contention based random access test in FR2 for PSCell/SCell in EN-DC.....	1533
A.5.3.2.2.2	4-step RA type non-contention based random access test in FR2 for PSCell/SCell in EN-DC ..	1536
A.5.3.2.2.3	2-step RA type contention based random access test in FR2 for PSCell/SCell in EN-DC.....	1540
A.5.3.2.2.4	2-step RA type non-contention based random access test in FR2 for PSCell/SCell in EN-DC ..	1543
A.5.3.2.3	Void.....	1546
A.5.3.3	Handover with PSCell with known FR2 target PSCell.....	1546
A.5.3.3.1	Test purpose and environment	1546
A.5.3.3.2	Test Requirements.....	1549
A.5.3.3.3	void	1549
A.5.3.3.4	void	1549
A.5.3.3.5	void	1549
A.5.3.3.6	void	1549
A.5.4	Timing	1550

A.5.4.1	UE transmit timing	1550
A.5.4.1.1	NR UE Transmit Timing Test for FR2	1550
A.5.4.1.1.1	Test Purpose and environment	1550
A.5.4.1.1.2	Test requirements	1552
A.5.4.2	UE timer accuracy	1553
A.5.4.3	Timing advance	1553
A.5.4.3.1	EN-DC FR2 timing advance adjustment accuracy	1553
A.5.4.3.1.1	Test Purpose and Environment	1553
A.5.4.3.1.2	Test Parameters	1553
A.5.4.3.1.3	Test Requirements	1555
A.5.5	Signaling characteristics	1556
A.5.5.1	Radio link Monitoring	1556
A.5.5.1.1	Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with SSB-based RLM RS in non-DRX mode	1556
A.5.5.1.1.1	Test Purpose and Environment	1556
A.5.5.1.1.2	Test Requirements	1559
A.5.5.1.2	Radio Link Monitoring In-sync Test for FR2 PSCell configured with SSB-based RLM RS in non-DRX mode	1559
A.5.5.1.2.1	Test Purpose and Environment	1559
A.5.5.1.2.2	Test Requirements	1563
A.5.5.1.3	Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with SSB-based RLM RS in DRX mode	1563
A.5.5.1.3.1	Test Purpose and Environment	1563
A.5.5.1.3.2	Test Requirements	1565
A.5.5.1.4	Radio Link Monitoring In-sync Test for FR2 PSCell configured with SSB-based RLM RS in DRX mode	1566
A.5.5.1.4.1	Test Purpose and Environment	1566
A.5.5.1.4.2	Test Requirements	1569
A.5.5.1.5	EN-DC Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with CSI-RS-based RLM in non-DRX mode	1569
A.5.5.1.6	EN-DC Radio Link Monitoring In-sync Test for FR2 PSCell configured with CSI-RS-based RLM in non-DRX mode	1572
A.5.5.1.7	EN-DC Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with CSI-RS-based RLM in DRX mode	1576
A.5.5.1.8	EN-DC Radio Link Monitoring In-sync Test for FR2 PSCell configured with CSI-RS-based RLM in DRX mode	1580
A.5.5.1.8.2	Test Requirements	1584
A.5.5.1.9	EN-DC Radio Link Monitoring UE Scheduling Restrictions on FR2	1584
A.5.5.1.9.1	Test Purpose and Environment	1584
A.5.5.1.9.2	Test Requirements	1586
A.5.5.1.10	Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion	1587
A.5.5.1.10.1	Test Purpose and Environment	1587
A.5.5.1.10.2	Test Requirements	1589
A.5.5.2	Interruption	1590
A.5.5.2.1	E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC	1590
A.5.5.2.1.1	Test Purpose and Environment	1590
A.5.5.2.1.2	Test Requirements	1592
A.5.5.2.2	E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC	1592
A.5.5.2.2.1	Test Purpose and Environment	1592
A.5.5.2.2.2	Test Requirements	1594
A.5.5.2.3	E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC	1594
A.5.5.2.3.1	Test Purpose and Environment	1594
A.5.5.2.3.2	Test Requirements	1597
A.5.5.2.4	E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC	1598
A.5.5.2.4.1	Test Purpose and Environment	1598
A.5.5.2.4.2	Test Requirements	1600

A.5.5.2.5	E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC	1601
A.5.5.2.5.1	Test Purpose and Environment.....	1601
A.5.5.2.5.2	Test Requirements.....	1603
A.5.5.2.6	E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC.....	1603
A.5.5.2.6.1	Test Purpose and Environment.....	1603
A.5.5.2.6.2	Test Requirements.....	1605
A.5.5.2.7	E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching	1606
A.5.5.2.7.1	Test Purpose and Environment.....	1606
A.5.5.2.7.2	Test Requirements.....	1608
A.5.5.2.8	E-UTRAN – NR FR2 interruptions at NR SRS carrier based switching.....	1608
A.5.5.2.8.1	Test Purpose and Environment.....	1608
A.5.5.2.8.3	Test Requirements.....	1611
A.5.5.3	SCell Activation and Deactivation Delay	1611
A.5.5.3.1	SCell Activation and deactivation of SCell in FR2 intra-band	1611
A.5.5.3.1.1	Test Purpose and Environment.....	1611
A.5.5.3.1.2	Test Requirements.....	1613
A.5.5.3.2	SCell Activation and deactivation of known SCell in FR1 for 160ms SCell measurement cycle	1613
A.5.5.3.2.1	Test Purpose and Environment.....	1613
A.5.5.3.2.2	Test Requirements.....	1615
A.5.5.3.3	Void.....	1615
A.5.5.3.4	Void.....	1615
A.5.5.3.5	SCell Activation and deactivation of SCell in FR2.....	1615
A.5.5.3.5.1	Test Purpose and Environment.....	1615
A.5.5.3.5.2	Test Requirements.....	1618
A.5.5.3.6	Multiple SCell Activation and deactivation of one unknown SCell and one known SCell in FR2...	1619
A.5.5.3.6.1	Test Purpose and Environment.....	1619
A.5.5.3.6.2	Test Requirements.....	1622
A.5.5.3.7	Direct SCell activation at SCell addition of known SCell in FR2.....	1622
A.5.5.3.7.1	Test Purpose and Environment.....	1622
A.5.5.3.7.2	Test Requirements.....	1625
A.5.5.3.8	Fast SCell Activation of SCell in FR2 intra-band	1625
A.5.5.3.8.1	Test Purpose and Environment.....	1625
A.5.5.3.8.2	Test Requirements.....	1628
A.5.5.3.9	PUCCH SCell Activation and deactivation of known SCell in FR2.....	1629
A.5.5.3.9.1	Test Purpose and Environment.....	1629
A.5.5.3.9.2	Test Requirements.....	1632
A.5.5.3.10	PUCCH SCell Activation and deactivation of unknown SCell in FR2.....	1632
A.5.5.3.10.1	Test Purpose and Environment.....	1632
A.5.5.3.10.2	Test Requirements.....	1635
A.5.5.3.11	Multiple SCell activation and deactivation of one known PUCCH SCell and one unknown SCell in FR2.....	1636
A.5.5.3.11.1	Test Purpose and Environment.....	1636
A.5.5.3.11.2	Test Requirements.....	1639
A.5.5.3.12	SCell Activation and deactivation of unknown PUCCH SCell and unknown DL SCell in FR2 in non-DRX	1640
A.5.5.3.12.1	Test Purpose and Environment.....	1640
A.5.5.3.12.2	Test Requirements.....	1643
A.5.5.4	Void	1644
A.5.5.5	Beam Failure Detection and Link recovery procedures.....	1644
A.5.5.5.1	EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with SSB-based BFD and LR in non-DRX mode	1644
A.5.5.5.1.1	Test Purpose and Environment.....	1644
A.5.5.5.1.2	Test Requirements.....	1648
A.5.5.5.2	EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with SSB-based BFD and LR in DRX mode.....	1648
A.5.5.5.2.1	Test Purpose and Environment.....	1648
A.5.5.5.2.2	Test Requirements.....	1652
A.5.5.5.3	EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with CSI-RS-based BFD and LR in non-DRX mode	1652
A.5.5.5.3.1	Test Purpose and Environment.....	1652

A.5.5.5.3.2	Test Requirements	1656
A.5.5.5.4	EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with CSI-RS-based BFD and LR in DRX mode.....	1656
A.5.5.5.4.1	Test Purpose and Environment.....	1656
A.5.5.5.4.2	Test Requirements	1660
A.5.5.5.5	EN-DC scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PSCell configured with SSB-based BFD and LR in non-DRX mode	1660
A.5.5.5.5.1	Test Purpose and Environment.....	1660
A.5.5.5.5.2	Test Requirements	1664
A.5.5.5.6	EN-DC Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in non-DRX mode	1664
A.5.5.5.6.1	Test Purpose and Environment.....	1664
A.5.5.5.6.2	Test Requirements	1668
A.5.5.5.7	EN-DC Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in DRX mode.....	1668
A.5.5.5.7.1	Test Purpose and Environment.....	1668
A.5.5.5.7.2	Test Requirements	1672
A.5.5.5.8	EN-DC TRP specific Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with CSI-RS-based BFD and LR in DRX mode.....	1672
A.5.5.5.8.1	Test Purpose and Environment.....	1672
A.5.5.5.8.2	Test Requirements	1676
A.5.5.5.9	Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with SSB-based BFD and LR in DRX mode for UE fulfilling relaxed measurement criterion	1676
A.5.5.5.9.1	Test Purpose and Environment.....	1676
A.5.5.5.9.2	Test Requirements	1680
A.5.5.6	Active BWP switch.....	1680
A.5.5.6.1	DCI-based and Timer-based Active BWP Switch	1680
A.5.5.6.1.1	E-UTRAN – NR PSCell FR2 DL active BWP switch with non-DRX in synchronous EN-DC ..	1680
A.5.5.6.1.1.1	Test Purpose and Environment	1680
A.5.5.6.1.1.2	Test Requirements	1683
A.5.5.6.1.2	E-UTRAN – NR PSCell FR2 with FR2 SCell DL active BWP switch in non-DRX in synchronous EN-DC.....	1684
A.5.5.6.2	RRC-based Active BWP Switch	1688
A.5.5.6.2.1	E-UTRAN – NR PSCell FR2 DL active BWP switch with non-DRX in synchronous EN-DC ..	1688
A.5.5.6.3	Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs	1691
A.5.5.6.3.1	E-UTRAN – NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs in synchronous EN-DC.....	1691
A.5.5.6.4	SCell dormancy switch	1695
A.5.5.6.4.1	E-UTRAN – NR FR2 PSCell SCell dormancy switch of single FR2 SCell inside active time...	1695
A.5.5.6.4.1.1	Test Purpose and Environment	1695
A.5.5.6.4.1.2	Test Requirements	1698
A.5.5.6.4.2	E-UTRAN – NR FR1 PSCell SCell dormancy switch of two FR2 SCells outside active time...	1698
A.5.5.6.4.2.1	Test Purpose and Environment	1698
A.5.5.6.4.2.2	Test Requirements	1703
A.5.5.6.5	Simultaneous RRC-based Active BWP Switch on multiple CCs	1703
A.5.5.6.5.1	E-UTRAN – NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs with non-DRX in synchronous EN-DC	1703
A.5.5.7	PSCell addition and release delay.....	1707
A.5.5.7.1	Addition and Release Delay of NR PSCell	1707
A.5.5.7.1.1	Test purpose and environment.....	1707
A.5.5.7.1.2	Test Requirements	1709
A.5.5.8	Active TCI state switch delay	1710
A.5.5.8.1	MAC-CE based active TCI state switch.....	1710
A.5.5.8.1.1	E-UTRAN – NR PSCell FR2 active TCI state switch for a known TCI state.....	1710
A.5.5.8.1.1.1	Test Purpose and Environment	1710
A.5.5.8.1.1.2	Test Requirements	1713
A.5.5.8.2	RRC based active TCI state switch	1713
A.5.5.8.2.1	E-UTRAN – NR PSCell FR2 active TCI state switch for a known TCI state.....	1713
A.5.5.8.2.1.1	Test Purpose and Environment	1713
A.5.5.8.2.1.2	Test Requirements	1717
A.5.5.9	Uplink spatial relation switch delay.....	1717
A.5.5.9.1	MAC-CE based uplink spatial relation switch	1717

A.5.5.9.1.1	E-UTRAN – NR PSCell FR2 uplink spatial relation switch for a known spatial relation	1717
A.5.5.9.1.1.1	Test Purpose and Environment	1717
A.5.5.9.1.1.2	Test Requirements	1720
A.5.5.9.2	RRC based spatial relation switch.....	1720
A.5.5.9.2.1	E-UTRAN – NR PSCell FR2 spatial relation switch associated with a known DL-RS	1720
A.5.5.9.2.1.1	Test Purpose and Environment	1720
A.5.5.9.2.1.2	Test Requirements	1722
A.5.5.10	UE specific CBW change	1723
A.5.5.10.1	UE specific CBW change on FR2 NR PSCell	1723
A.5.5.10.1.1	Test Purpose and Environment.....	1723
A.5.5.10.1.2	Test Requirements	1726
A.5.5.11	Unified TCI state switch delay	1726
A.5.5.11.1	MAC-CE based active joint TCI state switch	1726
A.5.5.11.1.1	E-UTRAN – NR PSCell FR2 active joint TCI state switch for a known TCI state.....	1726
A.5.5.11.1.1.1	Test Purpose and Environment	1726
A.5.5.11.1.1.2	Test parameters	1727
A.5.5.11.1.1.3	Test Requirements	1728
A.5.5.11.2	MAC-CE based active uplink TCI state switch	1729
A.5.5.11.2.1	E-UTRAN – NR PSCell FR2 active uplink TCI state switch for a known TCI state.....	1729
A.5.5.11.2.1.1	Test Purpose and Environment	1729
A.5.5.11.2.1.2	Test parameters	1729
A.5.5.11.2.1.3	Test Requirements	1731
A.5.5.11.3	MAC-CE based active downlink TCI state switch.....	1732
A.5.5.11.3.1	E-UTRAN – NR PSCell FR2 downlink TCI state switch to cell with additional PCI for a known TCI state	1732
A.5.5.11.3.1.1	Test Purpose and Environment	1732
A.5.5.11.3.1.2	Test Parameters.....	1732
A.5.5.11.3.1.3	Test Requirements	1736
A.5.5.12	PSCell activation and deactivation delay.....	1736
A.5.5.12.1	PSCell activation and deactivation delay	1736
A.5.5.12.1.1	Test purpose and environment.....	1736
A.5.5.12.1.2	Test Requirements	1739
A.5.5.13	Conditional PSCell addition and release delay	1739
A.5.5.13.1	Addition and Release Delay of NR PSCell	1739
A.5.5.13.1.1	Test purpose and environment.....	1739
A.5.5.13.1.2	Test Requirements	1742
A.5.5.13.2	E-UTRAN – NR FR2 interruptions during measurements on deactivated NR PSCell	1742
A.5.5.13.2.1	Test Purpose and Environment.....	1742
A.5.5.13.2.2	Test Requirements	1745
A.5.6	Measurement procedure	1745
A.5.6.1	Intra-frequency Measurements	1745
A.5.6.1.1	EN-DC event triggered reporting test without gap under non-DRX	1745
A.5.6.1.1.1	Test purpose and Environment.....	1745
A.5.6.1.1.2	Test Requirements	1748
A.5.6.1.2	EN-DC event triggered reporting test without gap under DRX	1748
A.5.6.1.2.1	Test purpose and Environment	1748
A.5.6.1.2.2	Test Requirements	1751
A.5.6.1.3	EN-DC event triggered reporting test with per-UE gaps under non-DRX	1751
A.5.6.1.3.1	Test purpose and Environment	1751
A.5.6.1.3.2	Test Requirements	1754
A.5.6.1.4	EN-DC event triggered reporting test with per-UE gaps under DRX	1754
A.5.6.1.4.1	Test purpose and Environment	1754
A.5.6.1.4.2	Test Requirements	1757
A.5.6.2	Inter-frequency Measurements	1757
A.5.6.2.1	EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is not used	1757
A.5.6.2.1.1	Test Purpose and Environment.....	1757
A.5.6.2.1.2	Test Requirements	1760
A.5.6.2.2	EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is used.....	1760
A.5.6.2.2.1	Test Purpose and Environment.....	1760
A.5.6.2.2.2	Test Requirements	1763

A.5.6.2.3	EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is not used	1764
A.5.6.2.3.1	Test Purpose and Environment.....	1764
A.5.6.2.3.2	Test Requirements.....	1766
A.5.6.2.4	EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is used	1767
A.5.6.2.4.1	Test Purpose and Environment.....	1767
A.5.6.2.4.2	Test Requirements.....	1769
A.5.6.2.5	EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is not used	1770
A.5.6.2.5.1	Test Purpose and Environment.....	1770
A.5.6.2.5.2	Test Requirements.....	1773
A.5.6.2.6	EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is used.....	1773
A.5.6.2.6.1	Test Purpose and Environment.....	1773
A.5.6.2.6.2	Test Requirements.....	1777
A.5.6.2.7	EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is not used	1777
A.5.6.2.7.1	Test Purpose and Environment.....	1777
A.5.6.2.7.2	Test Requirements.....	1781
A.5.6.2.8	EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is used	1781
A.5.6.2.8.1	Test Purpose and Environment.....	1781
A.5.6.2.8.2	Test Requirements.....	1785
A.5.6.3	L1-RSRP measurement for beam reporting.....	1785
A.5.6.3.1	SSB based L1-RSRP measurement when DRX is not used.....	1785
A.5.6.3.1.1	Test Purpose and Environment.....	1785
A.5.6.3.1.2	Test parameters.....	1786
A.5.6.3.1.3	Test Requirements.....	1787
A.5.6.3.2	SSB based L1-RSRP measurement when DRX is used	1788
A.5.6.3.2.1	Test Purpose and Environment.....	1788
A.5.6.3.2.2	Test parameters.....	1788
A.5.6.3.2.3	Test Requirements.....	1790
A.5.6.3.3	CSI-RS based L1-RSRP measurement when DRX is not used.....	1790
A.5.6.3.3.1	Test Purpose and Environment.....	1790
A.5.6.3.3.2	Test parameters.....	1790
A.5.6.3.3.3	Test Requirements.....	1792
A.5.6.3.4	CSI-RS based L1-RSRP measurement when DRX is used.....	1792
A.5.6.3.4.1	Test Purpose and Environment.....	1792
A.5.6.3.4.2	Test parameters.....	1793
A.5.6.3.4.3	Test Requirements.....	1794
A.5.6.4	CLI measurements	1795
A.5.6.4.1	SRS-RSRP measurement with DRX.....	1795
A.5.6.4.1.1	Test Purpose and Environment.....	1795
A.5.6.4.1.2	Test Parameters	1795
A.5.6.4.1.3	Test Requirements.....	1797
A.5.6.4.2	CLI-RSSI measurement with DRX.....	1797
A.5.6.4.2.1	Test Purpose and Environment.....	1797
A.5.6.4.2.2	Test Parameters	1798
A.5.6.4.2.3	Test Requirements.....	1799
A.5.6.5	Measurements with autonomous gaps	1800
A.5.6.5.1	EN-DC inter-frequency CGI identification of NR neighbor cell in FR2	1800
A.5.6.5.1.1	Test Purpose and Environment.....	1800
A.5.6.5.1.2	Test Requirements.....	1802
A.5.6.6	L1-SINR measurement for beam reporting	1803
A.5.6.6.2	L1-SINR measurement with SSB based CMR and dedicated IMR when DRX is not used	1805
A.5.6.6.2.1	Test Purpose and Environment.....	1805
A.5.6.6.2.2	Test parameters.....	1805
A.5.6.6.2.3	Test Requirements.....	1808
A.5.6.6.3	L1-SINR measurement with CSI-RS based CMR and dedicated IMR configured when DRX is not used	1808
A.5.6.6.3.1	Test Purpose and Environment.....	1808

A.5.6.6.3.2	Test parameters.....	1808
A.5.6.6.3.3	Test Requirements.....	1810
A.5.6.7	CSI-RS based Intra-frequency Measurements.....	1810
A.5.6.7.1	EN-DC event triggered reporting test without gap under non-DRX.....	1810
A.5.6.7.1.1	Test purpose and Environment.....	1810
A.5.6.7.1.2	Test Requirements.....	1812
A.5.6.8	CSI-RS based Inter-frequency Measurements.....	1813
A.5.6.8.1	EN-DC event triggered reporting tests for NR FR2 cell when DRX is used.....	1813
A.5.6.8.1.1	Test Purpose and Environment.....	1813
A.5.6.8.1.2	Test Requirements.....	1815
A.5.7	Measurement Performance requirements.....	1816
A.5.7.1	SS-RSRP.....	1816
A.5.7.1.1	EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell.....	1816
A.5.7.1.1.1	Test Purpose and Environment.....	1816
A.5.7.1.1.2	Test parameters.....	1816
A.5.7.1.1.3	Test Requirements.....	1818
A.5.7.1.2	EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell.....	1819
A.5.7.1.2.1	Test Purpose and Environment.....	1819
A.5.7.1.2.2	Test parameters.....	1819
A.5.7.1.2.3	Test Requirements.....	1821
A.5.7.1.3	EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR2 target cell.....	1823
A.5.7.1.3.1	Test Purpose and Environment.....	1823
A.5.7.1.3.2	Test parameters.....	1823
A.5.7.1.3.3	Test Requirements.....	1825
A.5.7.2	SS-RSRQ.....	1826
A.5.7.2.1	EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell.....	1826
A.5.7.2.1.1	Test Purpose and Environment.....	1826
A.5.7.2.1.2	Test Parameters.....	1826
A.5.7.2.1.3	Test Requirements.....	1828
A.5.7.2.2	EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell.....	1828
A.5.7.2.2.1	Test Purpose and Environment.....	1828
A.5.7.2.2.2	Test Parameters.....	1828
A.5.7.2.2.3	Test Requirements.....	1830
A.5.7.3	SS-SINR.....	1831
A.5.7.3.1	EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell.....	1831
A.5.7.3.1.1	Test Purpose and Environment.....	1831
A.5.7.3.1.2	Test Parameters.....	1831
A.5.7.3.1.3	Test Requirements.....	1833
A.5.7.3.2	EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell.....	1833
A.5.7.3.2.1	Test Purpose and Environment.....	1833
A.5.7.3.2.2	Test Parameters.....	1833
A.5.7.3.2.3	Test Requirements.....	1835
A.5.7.4	L1-RSRP measurement for beam reporting.....	1835
A.5.7.4.1	SSB based L1-RSRP measurement.....	1835
A.5.7.4.1.1	Test Purpose and Environment.....	1835
A.5.7.4.1.2	Test parameters.....	1835
A.5.7.4.1.3	Test Requirements.....	1837
A.5.7.4.2	CSI-RS based L1-RSRP measurement on resource set with repetition off.....	1838
A.5.7.4.2.1	Test Purpose and Environment.....	1838
A.5.7.4.2.2	Test parameters.....	1838
A.5.7.4.2.3	Test Requirements.....	1839
A.5.7.5	CLI measurements.....	1840
A.5.7.5.1	EN-DC SRS-RSRP measurement accuracy with FR2 serving cell.....	1840
A.5.7.5.1.1	Test Purpose and Environment.....	1840
A.5.7.5.1.2	Test parameters.....	1840
A.5.7.5.1.3	Test Requirements.....	1842
A.5.7.5.2	EN-DC CLI-RSSI measurement accuracy with FR2 serving cell.....	1843
A.5.7.5.2.1	Test Purpose and Environment.....	1843
A.5.7.5.2.2	Test parameters.....	1843
A.5.7.5.2.3	Test Requirements.....	1845
A.5.7.6	L1-SINR measurement for beam reporting.....	1845
A.5.7.6.2	L1-SINR measurement with SSB based CMR and dedicated IMR.....	1848

A.5.7.6.2.1	Test Purpose and Environment.....	1848
A.5.7.6.2.2	Test parameters.....	1848
A.5.7.6.2.3	Test Requirements.....	1850
A.5.7.6.3	L1-SINR measurement with CSI-RS based CMR and dedicated IMR.....	1851
A.5.7.6.3.1	Test Purpose and Environment.....	1851
A.5.7.6.3.2	Test parameters.....	1851
A.5.7.6.3.3	Test Requirements.....	1853
A.5.7.7	CSI-RSRP.....	1853
A.5.7.7.1	EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	1853
A.5.7.7.1.1	Test Purpose and Environment.....	1853
A.5.7.7.1.2	Test parameters.....	1853
A.5.7.7.1.3	Test Requirements.....	1856
A.5.7.7.2	EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	1856
A.5.7.7.2.1	Test Purpose and Environment.....	1856
A.5.7.7.2.2	Test parameters.....	1857
A.5.7.7.2.3	Test Requirements.....	1859
A.5.7.8	CSI-RSRQ.....	1860
A.5.7.8.1	EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell.....	1860
A.5.7.8.1.1	Test Purpose and Environment.....	1860
A.5.7.8.1.2	Test Parameters	1860
A.5.7.8.1.3	Test Requirements.....	1862
A.5.7.8.2	EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell....	1862
A.5.7.8.2.1	Test Purpose and Environment.....	1862
A.5.7.8.2.2	Test Parameters	1862
A.5.7.8.2.3	Test Requirements.....	1864
A.5.7.9	CSI-SINR.....	1864
A.5.7.9.1	EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell....	1864
A.5.7.9.1.1	Test Purpose and Environment.....	1864
A.5.7.9.1.2	Test Parameters	1864
A.5.7.9.1.3	Test Requirements.....	1866
A.5.7.9.2	EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell....	1866
A.5.7.9.2.1	Test Purpose and Environment.....	1866
A.5.7.9.2.2	Test Parameters	1866
A.5.7.9.2.3	Test Requirements.....	1868
A.5.8	Void.....	1868
A.6	NR standalone tests with all NR cells in FR1	1869
A.6.1	SA: RRC_IDLE state mobility.....	1869
A.6.1.1	Cell re-selection to NR	1869
A.6.1.1.1	Cell reselection to FR1 intra-frequency NR case	1869
A.6.1.1.1.1	Test Purpose and Environment.....	1869
A.6.1.1.1.2	Test Parameters	1869
A.6.1.1.1.3	Test Requirements.....	1871
A.6.1.1.2	Cell reselection to FR1 inter-frequency NR case	1872
A.6.1.1.2.1	Test Purpose and Environment.....	1872
A.6.1.1.2.2	Test Parameters	1872
A.6.1.1.2.3	Test Requirements.....	1874
A.6.1.1.3	Cell reselection to FR1 intra-frequency NR case for UE fulfilling low mobility relaxed measurement criterion.....	1874
A.6.1.1.3.1	Test Purpose and Environment.....	1874
A.6.1.1.3.2	Test Parameters	1875
A.6.1.1.3.3	Test Requirements.....	1877
A.6.1.1.4	Cell reselection to FR1 intra-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion.....	1878
A.6.1.1.4.1	Test Purpose and Environment.....	1878
A.6.1.1.4.2	Test Parameters	1878
A.6.1.1.4.3	Test Requirements.....	1880
A.6.1.1.5	Cell reselection to FR1 inter-frequency NR case for UE fulfilling low mobility relaxed measurement criterion.....	1880
A.6.1.1.5.1	Test Purpose and Environment.....	1880
A.6.1.1.5.2	Test Parameters	1880
A.6.1.1.5.3	Test Requirements.....	1885

A.6.1.1.6	Cell reselection to FR1 inter-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion.....	1886
A.6.1.1.6.1	Test Purpose and Environment.....	1886
A.6.1.1.6.2	Test Parameters	1886
A.6.1.1.6.3	Test Requirements	1890
A.6.1.1.7	Cell reselection to FR1 intra-frequency NR case for UE configured with <i>highSpeedMeasFlag-r16</i>	1891
A.6.1.1.7.1	Test Purpose and Environment.....	1891
A.6.1.1.7.2	Test Parameters	1891
A.6.1.1.7.3	Test Requirements	1893
A.6.1.1.8	Cell reselection to FR1 inter-frequency NR case for UE configured with <i>highSpeedMeasInterFreq-r17</i>	1894
A.6.1.1.8.1	Test Purpose and Environment.....	1894
A.6.1.1.8.2	Test Parameters	1894
A.6.1.1.8.3	Test Requirements	1896
A.6.1.2	Inter-RAT E-UTRAN cell re-selection.....	1897
A.6.1.2.1	Cell reselection to higher priority E-UTRAN	1897
A.6.1.2.1.1	Test Purpose and Environment.....	1897
A.6.1.2.1.2	Test Parameters	1897
A.6.1.2.1.3	Test Requirements	1900
A.6.1.2.2	Cell reselection to lower priority E-UTRAN	1900
A.6.1.2.2.1	Test Purpose and Environment.....	1900
A.6.1.2.2.2	Test Parameters	1900
A.6.1.2.2.3	Test Requirements	1903
A.6.1.2.3	Cell reselection to lower priority E-UTRAN for UE fulfilling low mobility relaxed measurement criterion	1903
A.6.1.2.3.1	Test Purpose and Environment.....	1903
A.6.1.2.3.2	Test Parameters	1903
A.6.1.2.3.3	Test Requirements	1906
A.6.1.2.4	Cell reselection to lower priority E-UTRAN for UE fulfilling not-at-cell edge relaxed measurement criterion.....	1907
A.6.1.2.4.1	Test Purpose and Environment.....	1907
A.6.1.2.4.2	Test Parameters	1907
A.6.1.2.4.3	Test Requirements	1910
A.6.1.2.5	Cell reselection to lower priority E-UTRAN cell for UE configured with <i>highSpeedMeasFlag-r16</i>	1910
A.6.1.2.5.1	Test Purpose and Environment.....	1910
A.6.1.2.5.2	Test Parameters	1910
A.6.1.2.5.3	Test Requirements	1913
A.6.1.1.7	Void.....	1913
A.6.2	SA: RRC_INACTIVE state mobility	1913
A.6.2.1	Configured Grant based Small Data Transmissions (CG-SDT)	1913
A.6.2.1.1	Test purpose and Environment.....	1913
A.6.2.1.2	Test Parameters	1915
A.6.2.1.3	Test requirements.....	1916
A.6.3	RRC_CONNECTED state mobility	1917
A.6.3.1	Handover	1917
A.6.3.1.1	Intra-frequency handover from FR1 to FR1; known target cell.....	1917
A.6.3.1.1.1	Test Purpose and Environment.....	1917
A.6.3.1.1.2	Test Parameters	1917
A.6.3.1.1.3	Test Requirements	1919
A.6.3.1.2	Intra-frequency handover from FR1 to FR1; unknown target cell	1919
A.6.3.1.2.1	Test Purpose and Environment.....	1919
A.6.3.1.2.2	Test Parameters	1919
A.6.3.1.2.3	Test Requirements	1921
A.6.3.1.3	Inter-frequency handover from FR1 to FR1; unknown target cell	1921
A.6.3.1.3.1	Test Purpose and Environment.....	1921
A.6.3.1.3.2	Test Parameters	1921
A.6.3.1.3.3	Test Requirements	1923
A.6.3.1.4	SA NR - E-UTRAN handover	1924
A.6.3.1.4.1	Test Purpose and Environment.....	1924
A.6.3.1.4.2	Test Requirements	1927

A.6.3.1.5	SA NR - E-UTRAN handover with unknown target cell	1927
A.6.3.1.5.1	Test Purpose and Environment.....	1927
A.6.3.1.5.2	Test Requirements	1930
A.6.3.1.6	SA NR - UTRAN FDD handover	1931
A.6.3.1.6.1	Test Purpose and Environment.....	1931
A.6.3.1.6.2	Test Requirements	1933
A.6.3.1.7	Intra-frequency synchronous DAPS handover in FR1	1934
A.6.3.1.7.1	Test Purpose and Environment.....	1934
A.6.3.1.7.2	Test Parameters	1934
A.6.3.1.7.3	Test Requirements	1936
A.6.3.1.8	Intra-frequency asynchronous DAPS handover in FR1	1937
A.6.3.1.8.1	Test Purpose and Environment.....	1937
A.6.3.1.8.2	Test Parameters	1937
A.6.3.1.8.3	Test Requirements	1939
A.6.3.1.9	Intra-band inter-frequency synchronous DAPS handover test in SA for FR1	1940
A.6.3.1.9.1	Test Purpose and Environment.....	1940
A.6.3.1.9.2	Test Parameters	1940
A.6.3.1.9.3	Test Requirements	1942
A.6.3.1.10	Intra-band inter-frequency asynchronous DAPS handover test in SA for FR1	1942
A.6.3.1.10.1	Test Purpose and Environment.....	1942
A.6.3.1.10.2	Test Parameters	1943
A.6.3.1.10.3	Test Requirements	1945
A.6.3.1.11	Inter-band inter-frequency synchronous DAPS handover from FR1 to FR1	1945
A.6.3.1.11.1	Test Purpose and Environment.....	1945
A.6.3.1.11.2	Test Parameters	1945
A.6.3.1.11.3	Test Requirements	1949
A.6.3.1.12	Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR1	1950
A.6.3.1.12.1	Test Purpose and Environment.....	1950
A.6.3.1.12.2	Test Parameters	1950
A.6.3.1.12.3	Test Requirements	1954
A.6.3.1.13	SA NR - E-UTRAN with NR PSCell addition in FR1.....	1954
A.6.3.1.13.1	Test Purpose and Environment.....	1954
A.6.3.1.13.2	Test Requirements	1959
A.6.3.1.14	SA NR - E-UTRAN handover with NR FR1 PSCell addition	1959
A.6.3.1.14.1	Test Purpose and Environment.....	1959
A.6.3.1.14.2	Test Requirements	1965
A.6.3.2	RRC Connection Mobility Control	1966
A.6.3.2.1	SA: RRC Re-establishment.....	1966
A.6.3.2.1.1	Intra-frequency RRC Re-establishment in FR1	1966
A.6.3.2.1.2	Inter-frequency RRC Re-establishment in FR1	1969
A.6.3.2.1.3	Intra-frequency RRC Re-establishment in FR1 without serving cell timing	1972
A.6.3.2.2	Random Access.....	1974
A.6.3.2.2.1	4-step RA type contention based random access test in FR1 for NR standalone	1974
A.6.3.2.2.2	4-step RA type non-contention based random access test in FR1 for NR standalone	1978
A.6.3.2.2.3	2-step RA type contention based random access test in FR1 for NR standalone	1981
A.6.3.2.2.4	2-step RA type non-contention based test in FR1 for NR standalone	1983
A.6.3.2.3	SA: RRC Connection Release with Redirection	1986
A.6.3.2.3.1	Redirection from NR in FR1 to NR in FR1.....	1986
A.6.3.2.3.2	Redirection from NR in FR1 to E-UTRAN.....	1989
A.6.3.3	Conditional handover	1992
A.6.3.3.1	Intra-frequency conditional handover from FR1 to FR1.....	1992
A.6.3.3.1.1	Test Purpose and Environment.....	1992
A.6.3.3.1.2	Test Parameters	1992
A.6.3.3.1.3	Test Requirements	1994
A.6.3.3.2	Inter-frequency conditional handover from FR1 to FR1.....	1995
A.6.3.3.2.1	Test Purpose and Environment.....	1995
A.6.3.3.2.2	Test Parameters	1995
A.6.3.3.2.3	Test Requirements	1997
A.6.4	Timing	1997
A.6.4.1	UE transmit timing	1997
A.6.4.1.1	NR UE Transmit Timing Test for FR1	1997
A.6.4.1.1.1	Test Purpose and environment	1997

A.6.4.1.1.2	Test requirements	1999
A.6.4.2	UE timer accuracy	2000
A.6.4.3	Timing advance	2000
A.6.4.3.1	SA FR1 timing advance adjustment accuracy	2000
A.6.4.3.1.1	Test Purpose and Environment	2000
A.6.4.3.1.2	Test Parameters	2000
A.6.4.3.1.3	Test Requirements	2003
A.6.5	Signalling characteristics	2003
A.6.5.1	Radio link Monitoring	2003
A.6.5.1.1	Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode	2004
A.6.5.1.1.1	Test Purpose and Environment	2004
A.6.5.1.1.2	Test Requirements	2007
A.6.5.1.2	Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode	2007
A.6.5.1.2.1	Test Purpose and Environment	2007
A.6.5.1.2.2	Test Requirements	2011
A.6.5.1.3	Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode	2011
A.6.5.1.3.1	Test Purpose and Environment	2011
A.6.5.1.3.2	Test Requirements	2015
A.6.5.1.4	Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode	2015
A.6.5.1.4.1	Test Purpose and Environment	2015
A.6.5.1.4.2	Test Requirements	2018
A.6.5.1.5	Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode	2018
A.6.5.1.5.1	Test Purpose and Environment	2018
A.6.5.1.5.2	Test Requirements	2021
A.6.5.1.6	Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode	2022
A.6.5.1.6.1	Test Purpose and Environment	2022
A.6.5.1.6.2	Test Requirements	2025
A.6.5.1.7	Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode	2025
A.6.5.1.7.1	Test Purpose and Environment	2025
A.6.5.1.7.2	Test Requirements	2028
A.6.5.1.8	Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode	2029
A.6.5.1.8.1	Test Purpose and Environment	2029
A.6.5.1.8.2	Test Requirements	2032
A.6.5.1.9	Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM for UE fulfilling relaxed measurement criterion	2032
A.6.5.1.9.1	Test Purpose and Environment	2032
A.6.5.1.9.2	Test Requirements	2035
A.6.5.2	Interruption	2036
A.6.5.2.1	Interruptions during measurements on deactivated NR SCC in FR1	2036
A.6.5.2.1.2	Test Requirements	2039
A.6.5.2.2	SA interruptions at NR SRS carrier based switching	2040
A.6.5.2.2.1	Test Purpose and Environment	2040
A.6.5.2.2.2	Test Parameters	2040
A.6.5.2.2.3	Test Requirements	2042
A.6.5.2.3	SA interruptions at NR SRS antenna port switching with 1 SRS symbol in a slot in NR-CA	2042
A.6.5.2.3.1	Test Purpose and Environment	2042
A.6.5.2.3.2	Test Parameters	2043
A.6.5.2.3.3	Test Requirements	2045
A.6.5.2.4	SA interruptions at NR SRS antenna port switching	2045
A.6.5.2.4.1	Test Purpose and Environment	2045
A.6.5.2.4.2	Test Parameters	2046
A.6.5.2.4.3	Test Requirements	2048
A.6.5.3	SCell Activation and Deactivation Delay	2048

A.6.5.3.1	SCell Activation and deactivation of known SCell in FR1 in non-DRX for 160ms SCell measurement cycle	2048
A.6.5.3.1.1	Test Purpose and Environment.....	2048
A.6.5.3.1.2	Test Requirements	2053
A.6.5.3.2	SCell Activation and deactivation of known SCell in FR1 in non-DRX for 640 ms SCell measurement cycle	2054
A.6.5.3.2.1	Test Purpose and Environment.....	2054
A.6.5.3.2.2	Test Requirements	2054
A.6.5.3.3	SCell Activation and deactivation of unknown SCell in FR1 in non-DRX	2054
A.6.5.3.3.1	Test Purpose and Environment.....	2054
A.6.5.3.3.2	Test Requirements	2055
A.6.5.3.4	Direct SCell activation at SCell addition of known SCell in FR1.....	2055
A.6.5.3.4.1	Test Purpose and Environment.....	2055
A.6.5.3.4.2	Test Requirements	2059
A.6.5.3.5	Direct SCell activation at handover with known SCell in FR1	2060
A.6.5.3.5.1	Test Purpose and Environment.....	2060
A.6.5.3.5.2	Test Requirements	2064
A.6.5.3.6	PUCCH SCell Activation and deactivation of known SCell in FR1	2065
A.6.5.3.6.1	Test Purpose and Environment.....	2065
A.6.5.3.6.2	Test Requirements	2068
A.6.5.3.7	SCell Activation and deactivation of unknown SCell in FR1 in non-DRX	2069
A.6.5.3.7.1	Test Purpose and Environment.....	2069
A.6.5.3.7.2	Test Requirements	2072
A.6.5.3.8	SCell Activation and Deactivation of one FR1 known PUCCH SCell and one FR1 unknown SCell with single activation/deactivation command	2073
A.6.5.3.8.1	Test Purpose and Environment.....	2073
A.6.5.3.8.2	Test Requirements	2077
A.6.5.3.9	SCell Activation and deactivation of unknown PUCCH SCell and unknown DL SCell in FR1 in non-DRX	2077
A.6.5.3.9.1	Test Purpose and Environment.....	2077
A.6.5.3.9.2	Test Requirements	2081
A.6.5.3.10	Fast SCell Activation of known SCell in FR1 in non-DRX for 160ms SCell measurement cycle ...	2081
A.6.5.3.10.1	Test Purpose and Environment.....	2081
A.6.5.3.10.2	Test Requirements	2085
A.6.5.3.11	SCell Activation of known SCell in FR1 in non-DRX for 640 ms SCell measurement cycle.....	2085
A.6.5.3.11.1	Test Purpose and Environment.....	2085
A.6.5.3.11.2	Test Requirements	2085
A.6.5.4	UE UL carrier RRC reconfiguration Delay	2086
A.6.5.4.1	UE UL carrier RRC reconfiguration Delay.....	2086
A.6.5.4.1.1	Test Purpose and Environment.....	2086
A.6.5.4.1.2	Test Requirements	2092
A.6.5.4.2	Void.....	2093
A.6.5.5	Beam Failure Detection and Link recovery procedures.....	2093
A.6.5.5.1	Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode	2093
A.6.5.5.1.1	Test Purpose and Environment.....	2093
A.6.5.5.2	Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode	2097
A.6.5.5.2.1	Test Purpose and Environment.....	2097
A.6.5.5.2.2	Test Requirements	2102
A.6.5.5.3	Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode	2102
A.6.5.5.3.1	Test Purpose and Environment.....	2102
A.6.5.5.3.2	Test Requirements	2106
A.6.5.5.4	Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode.....	2107
A.6.5.5.4.1	Test Purpose and Environment.....	2107
A.6.5.5.4.2	Test Requirements	2111
A.6.5.5.5	Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode	2111
A.6.5.5.5.1	Test Purpose and Environment.....	2111
A.6.5.5.5.2	Test Requirements	2115

A.6.5.5.6	Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in DRX mode	2116
A.6.5.5.6.1	Test Purpose and Environment.....	2116
A.6.5.5.6.2	Test Requirements	2120
A.6.5.5.7	TRP Specific Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode	2121
A.6.5.5.7.1	Test Purpose and Environment.....	2121
A.6.5.5.7.2	Test Requirements	2125
A.6.5.6	Active BWP switch.....	2125
A.6.5.6.1	DCI-based and Timer-based Active BWP Switch	2125
A.6.5.6.1.1	NR FR1- NR FR1 DL active BWP switch of SCell with non-DRX in SA	2125
A.6.5.6.1.2	NR FR1 DL active BWP switch with non-DRX in SA	2131
A.6.5.6.2	RRC-based Active BWP Switch	2134
A.6.5.6.2.1	NR FR1 DL active BWP switch of Cell with non-DRX in SA	2134
A.6.5.6.3	Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs	2137
A.6.5.6.3.1	NR FR1- NR FR1 DL active BWP switch on multiple CCs with non-DRX in SA	2137
A.6.5.6.4	SCell dormancy switch	2143
A.6.5.6.4.1	NR FR1 PCell SCell dormancy switch of single FR1 SCell outside active time	2143
A.6.5.6.4.1.1	Test Purpose and Environment	2143
A.6.5.6.4.1.2	Test Requirements	2148
A.6.5.6.4.2	NR FR1 PCell SCell dormancy switch of two FR1 SCells inside active time	2149
A.6.5.6.4.2.1	Test Purpose and Environment	2149
A.6.5.6.4.2.2	Test Requirements	2155
A.6.5.6.5	Simultaneous RRC-based Active BWP Switch on multiple CCs	2155
A.6.5.6.5.1	NR FR1- NR FR1 DL active BWP switch on multiple CCs with non-DRX in SA	2155
A.6.5.7	DL interruptions at switching between two uplink carriers	2160
A.6.5.7.1	DL interruptions at switching between two uplink carriers in FDD-TDD CA	2160
A.6.5.7.1.1	Test Purpose and Environment.....	2160
A.6.5.7.1.2	Test Requirements	2162
A.6.5.7.2	DL interruptions at switching between two uplink carriers in TDD-TDD CA	2162
A.6.5.7.2.1	Test Purpose and Environment.....	2162
A.6.5.7.2.2	Test Requirements	2165
A.6.5.7A	DL interruptions at switching between two uplink carriers with two transmit antenna connectors.....	2165
A.6.5.7A.1	DL interruptions at switching between two uplink carriers in FDD-TDD CA	2165
A.6.5.7A.1.1	Test Purpose and Environment.....	2165
A.6.5.7A.1.2	Test Requirements	2167
A.6.5.7A.2	DL interruptions at switching between two uplink carriers in TDD-TDD CA	2167
A.6.5.7A.2.1	Test Purpose and Environment.....	2167
A.6.5.7A.2.2	Test Requirements	2170
A.6.5.7B	DL interruptions at switching between one uplink band with one transmit antenna connector and one uplink band with two transmit antenna connectors.....	2170
A.6.5.7B.1	DL interruptions at switching between two uplink bands in FDD-TDD CA	2170
A.6.5.7B.1.1	Test Purpose and Environment.....	2170
A.6.5.7B.1.2	Test Requirements	2173
A.6.5.7B.2	DL interruptions at switching between two uplink bands in TDD-TDD CA.....	2173
A.6.5.7B.2.1	Test Purpose and Environment.....	2173
A.6.5.7B.2.2	Test Requirements	2175
A.6.5.7C	DL interruptions at switching between two uplink bands with two transmit antenna connectors	2176
A.6.5.7C.1	DL interruptions at switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA.....	2176
A.6.5.7C.1.1	Test Purpose and Environment.....	2176
A.6.5.7C.1.2	Test Requirements	2179
A.6.5.7C.2	DL interruptions at switching between two uplink bands with two transmit antenna connectors in TDD-TDD CA	2179
A.6.5.7C.2.1	Test Purpose and Environment.....	2179
A.6.5.7C.2.2	Test Requirements	2182
A.6.5.8	UE specific CBW change	2183
A.6.5.8.1	UE specific CBW change on PCell in FR1 in non-DRX	2183
A.6.5.8.1.1	Test Purpose and Environment.....	2183
A.6.5.8.1.2	Test Requirements	2186
A.6.5.9	Pathloss reference signal switching delay.....	2186
A.6.5.9.1	MAC-CE based pathloss reference signal switch delay.....	2186

A.6.5.9.1.1	Test Purpose and Environment.....	2186
A.6.5.9.1.2	Test Requirements.....	2189
A.6.6	Measurement procedure	2189
A.6.6.1	Intra-frequency Measurements	2189
A.6.6.1.1	SA event triggered reporting tests without gap under non-DRX	2189
A.6.6.1.1.1	Test purpose and Environment.....	2189
A.6.6.1.1.2	Test parameters.....	2189
A.6.6.1.1.3	Test Requirements.....	2191
A.6.6.1.2	SA event triggered reporting tests without gap under DRX.....	2191
A.6.6.1.2.1	Test purpose and Environment.....	2191
A.6.6.1.2.2	Test parameters.....	2192
A.6.6.1.2.3	Test Requirements.....	2194
A.6.6.1.3	SA event triggered reporting tests with per-UE gaps under non-DRX	2194
A.6.6.1.3.1	Test purpose and Environment.....	2194
A.6.6.1.3.2	Test parameters.....	2194
A.6.6.1.3.3	Test Requirements.....	2196
A.6.6.1.4	SA event triggered reporting tests with per-UE gaps under DRX.....	2196
A.6.6.1.4.1	Test purpose and Environment.....	2196
A.6.6.1.4.2	Test parameters.....	2196
A.6.6.1.4.3	Test Requirements.....	2199
A.6.6.1.5	SA event triggered reporting tests without gap under non-DRX with SSB index reading.....	2199
A.6.6.1.5.1	Test purpose and Environment.....	2199
A.6.6.1.5.2	Test parameters.....	2199
A.6.6.1.5.3	Test Requirements.....	2201
A.6.6.1.6	SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading	2201
A.6.6.1.6.1	Test purpose and Environment.....	2201
A.6.6.1.6.2	Test parameters.....	2201
A.6.6.1.6.3	Test Requirements.....	2203
A.6.6.1.7	SA event triggered reporting tests under DRX for UE configured with highSpeedMeasFlag-r16 ...	2203
A.6.6.1.7.1	Test purpose and Environment.....	2203
A.6.6.1.7.2	Test parameters.....	2203
A.6.6.1.7.3	Test Requirements.....	2205
A.6.6.1.8	SA event triggered reporting tests without gap under DRX for UE configured with highSpeedMeasCA-Scell-r17	2206
A.6.6.1.8.1	Test purpose and Environment.....	2206
A.6.6.1.8.2	Test parameters.....	2206
A.6.6.1.8.3	Test Requirements.....	2208
A.6.6.2	Inter-frequency Measurements	2209
A.6.6.2.1	SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used	2209
A.6.6.2.1.1	Test Purpose and Environment.....	2209
A.6.6.2.1.2	Test Requirements.....	2211
A.6.6.2.2	SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used ..	2212
A.6.6.2.2.1	Test Purpose and Environment.....	2212
A.6.6.2.2.2	Test Requirements.....	2215
A.6.6.2.3	Void.....	2215
A.6.6.2.4	Void.....	2215
A.6.6.2.5	SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used ..	2215
A.6.6.2.5.1	Test Purpose and Environment.....	2215
A.6.6.2.5.2	Test Requirements.....	2218
A.6.6.2.6	SA event triggered reporting tests for FR1 with SSB time index detection when DRX is used	2218
A.6.6.2.6.1	Test Purpose and Environment.....	2218
A.6.6.2.6.2	Test Requirements.....	2221
A.6.6.2.7	Void.....	2221
A.6.6.2.8	Void.....	2221
A.6.6.2.9	SA event triggered reporting tests with additional mandatory gap pattern	2221
A.6.6.2.9.1	Test Purpose and Environment.....	2221
A.6.6.2.9.2	Test Requirements.....	2224
A.6.6.2.10	SA event triggered reporting tests for FR1 when DRX is used.....	2224
A.6.6.2.10.1	Test Purpose and Environment.....	2224
A.6.6.2.10.2	Test Requirements.....	2227

A.6.6.2.12	SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used for UE configured with highSpeedMeasInterFreq-r17	2230
A.6.6.2.12.1	Test Purpose and Environment.....	2230
A.6.6.2.12.2	Test Requirements	2233
A.6.6.3	Inter-RAT Measurements	2233
A.6.6.3.1	SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1	2233
A.6.6.3.1.1	Test Purpose and Environment.....	2233
A.6.6.3.1.2	Test Requirements	2236
A.6.6.3.2	SA NR - E-UTRAN event-triggered reporting in DRX in FR1	2236
A.6.6.3.2.1	Test Purpose and Environment.....	2236
A.6.6.3.2.2	Test Requirements	2240
A.6.6.3.3	SA NR - E-UTRAN event-triggered reporting in DRX in FR1 for UE configured with highSpeedMeasFlag-r16	2240
A.6.6.3.3.1	Test Purpose and Environment.....	2240
A.6.6.3.3.2	Test Requirements	2244
A.6.6.4	L1-RSRP measurement for beam reporting	2244
A.6.6.4.1	SSB based L1-RSRP measurement when DRX is not used	2244
A.6.6.4.1.1	Test Purpose and Environment.....	2244
A.6.6.4.1.2	Test parameters.....	2245
A.6.6.4.1.3	Test Requirements	2246
A.6.6.4.2	SSB based L1-RSRP measurement when DRX is used	2246
A.6.6.4.2.1	Test Purpose and Environment.....	2246
A.6.6.4.2.2	Test parameters.....	2247
A.6.6.4.2.3	Test Requirements	2248
A.6.6.4.3	CSI-RS based L1-RSRP measurement when DRX is not used.....	2249
A.6.6.4.3.1	Test Purpose and Environment.....	2249
A.6.6.4.3.2	Test parameters.....	2249
A.6.6.4.3.3	Test Requirements	2251
A.6.6.4.4	CSI-RS based L1-RSRP measurement when DRX is used.....	2251
A.6.6.4.4.1	Test Purpose and Environment.....	2251
A.6.6.4.4.2	Test parameters.....	2251
A.6.6.4.4.3	Test Requirements	2253
A.6.6.4.5	SSB based L1-RSRP measurement when DRX is used for UE configured with highSpeedMeasFlag-r16	2253
A.6.6.4.5.1	Test Purpose and Environment.....	2253
A.6.6.4.5.2	Test parameters.....	2253
A.6.6.4.5.3	Test Requirements	2255
A.6.6.4.6	Inter-cell SSB based L1-RSRP measurements on FR1 PCell when DRX is used	2256
A.6.6.4.6.1	Test Purpose and Environment.....	2256
A.6.6.4.6.2	Test parameters.....	2256
A.6.6.4.6.3	Test Requirements	2258
A.6.6.5	Inter-RAT UTRAN FDD measurements	2258
A.6.6.5.1	SA NR - UTRAN FDD event-triggered reporting in non-DRX in FR1.....	2258
A.6.6.5.1.1	Test Purpose and Environment.....	2258
A.6.6.5.1.2	Test Requirements	2261
A.6.6.6	CLI measurements	2261
A.6.6.6.1	SRS-RSRP measurement with DRX.....	2261
A.6.6.6.1.1	Test Purpose and Environment.....	2261
A.6.6.6.1.2	Test Parameters	2261
A.6.6.6.1.3	Test Requirements	2264
A.6.6.6.2	CLI-RSSI measurement with DRX.....	2264
A.6.6.6.2.1	Test Purpose and Environment.....	2264
A.6.6.6.2.2	Test Parameters	2264
A.6.6.6.2.3	Test Requirements	2266
A.6.6.7	NR measurements with autonomous gaps	2266
A.6.6.7.1	SA intra-frequency CGI identification of NR neighbor cell in FR1	2266
A.6.6.7.1.1	Test Purpose and Environment.....	2266
A.6.6.7.1.2	Test Parameters	2266
A.6.6.7.1.3	Test Requirements	2268
A.6.6.7.2	Identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA.....	2268
A.6.6.7.2.1	Test Purpose and Environment.....	2268
A.6.6.7.2.2	Test Requirements	2271

A.6.6.8	L1-SINR measurement for beam reporting	2272
A.6.6.8.2	L1-SINR measurement with SSB based CMR and dedicated IMR when DRX is not used	2274
A.6.6.8.2.1	Test Purpose and Environment.....	2274
A.6.6.8.2.2	Test parameters.....	2275
A.6.6.8.2.3	Test Requirements	2277
A.6.6.8.3	L1-SINR measurement with CSI-RS based CMR and dedicated IMR configured when DRX is not used	2277
A.6.6.8.3.1	Test Purpose and Environment.....	2277
A.6.6.8.3.2	Test parameters.....	2278
A.6.6.8.3.3	Test Requirements	2280
A.6.6.9	Idle Mode CA/DC Measurements	2280
A.6.6.9.1	SA Idle mode CA/DC measurement for FR1	2280
A.6.6.9.1.1	Test Purpose and Environment.....	2280
A.6.6.9.1.2	Test Requirements	2284
A.6.6.10	CSI-RS based intra-frequency Measurements	2284
A.6.6.10.1	SA event triggered reporting tests without gap under non-DRX	2284
A.6.6.10.1.1	Test purpose and Environment	2284
A.6.6.10.1.2	Test Requirements	2286
A.6.6.11	CSI-RS based inter-frequency Measurements	2287
A.6.6.11.1	SA event triggered reporting tests with gap under DRX.....	2287
A.6.6.11.1.1	Test Purpose and Environment.....	2287
A.6.6.11.1.2	Test Requirements	2289
A.6.6.12	RSTD measurements	2290
A.6.6.12.1	NR RSTD measurement reporting delay test case for single positioning frequency layer in FR1 SA	2290
A.6.6.12.1.1	Test Purpose and Environment.....	2290
A.6.6.12.1.2	Test Requirements	2294
A.6.6.12.2	NR RSTD measurement reporting delay test case for dual positioning frequency layers in FR1 SA	2295
A.6.6.12.2.1	Test Purpose and Environment.....	2295
A.6.6.12.2.2	Test Requirements	2299
A.6.6.12.3	NR RSTD measurement reporting delay test case for single positioning frequency layer with reduced number of samples in FR1 SA.....	2299
A.6.6.12.3.1	Test Purpose and Environment.....	2299
A.6.6.12.3.2	Test Requirements	2303
A.6.6.12.4	NR RSTD measurement reporting delay test case for single positioning frequency layer in FR1 SA without measurement gap	2303
A.6.6.12.4.1	Test Purpose and Environment.....	2303
A.6.6.12.4.2	Test Requirements	2307
A.6.6.12.5	NR RSTD measurement reporting delay test case for single positioning frequency layer in FR1 SA in RRC_CONNECTED state with Rx TEG.....	2307
A.6.6.12.5.1	Test Purpose and Environment.....	2307
A.6.6.12.5.2	Test Requirements	2311
A.6.6.13	PRS-RSRP measurements	2312
A.6.6.13.1	PRS-RSRP reporting delay test case for single positioning frequency layer	2312
A.6.6.13.1.1	Test purpose and Environment	2312
A.6.6.13.1.2	Test Requirements	2314
The rate of correct events observed during repeated tests shall be at least 90%A.6.6.13.2 PRS-RSRP reporting delay test case for dual positioning frequency layer 2315		
A.6.6.13.2.1	Test purpose and Environment.....	2315
A.6.6.13.2.2	Test Requirements	2317
A.6.6.13.3	PRS-RSRP reporting delay test case for reduced number of samples.....	2318
A.6.6.13.3.1	Test purpose and Environment.....	2318
A.6.6.13.3.2	Test Requirements	2320
A.6.6.13.4	PRS-RSRP reporting delay test case for single positioning frequency layer outside MG	2320
A.6.6.13.4.1	Test purpose and Environment.....	2320
A.6.6.14	UE Rx-Tx time difference measurements.....	2323
A.6.6.14.1	UE Rx-Tx time difference measurement for single positioning frequency layer in FR1 SA	2323
A.6.6.14.1.1	Test purpose and environment.....	2323
A.6.6.14.1.2	Test requirements	2326
A.6.6.14.2	UE Rx-Tx time difference measurement for dual positioning frequency layers in FR1 SA	2326
A.6.6.14.2.1	Test purpose and environment.....	2326

A.6.6.14.2.2	Test requirements	2329
A.6.6.14.3	UE Rx-Tx time difference measurement for single positioning frequency layer in FR1 SA with reduced sample number.....	2329
A.6.6.14.3.1	Test purpose and environment.....	2329
A.6.6.14.3.2	Test requirements	2331
A.6.6.14.4	UE Rx-Tx time difference measurement without gaps in FR1 SA	2332
A.6.6.14.4.1	Test purpose and environment.....	2332
A.6.6.14.4.2	Test requirements	2334
A.6.6.14.5	UE Rx-Tx time difference measurement for single positioning frequency layer in FR1 SA with multiple RxTx TEGs	2335
A.6.6.14.4.1	Test purpose and environment.....	2335
A.6.6.14.4.2	Test requirements	2337
A.6.6.15	Idle Mode measurements of inter-RAT DC candidate cells for early reporting	2337
A.6.6.15.1	Test Purpose and Environment	2337
A.6.6.15.2	Test Requirements.....	2342
A.6.6.16	PRS-RSRPP measurements	2342
A.6.6.16.1	PRS-RSRPP reporting delay test case for single positioning frequency layer in FR1 in RRC_CONNECTED state	2342
A.6.6.16.1.1	Test purpose and Environment.....	2342
A.6.6.16.1.2	Test Requirements.....	2345
A.6.6.16.2	PRS-RSRPP reporting delay test case with reduced number of samples for single positioning frequency layer in FR1 in RRC_CONNECTED state.....	2345
A.6.6.16.2.1	Test purpose and Environment.....	2345
A.6.6.16.2.2	Test Requirements.....	2347
A.6.6.16.3	PRS-RSRPP reporting delay test case for single positioning frequency layer in FR1 in RRC_CONNECTED state without measurement gap	2347
A.6.6.16.3.1	Test purpose and Environment.....	2347
A.6.6.16.3.2	Test Requirements.....	2350
A.6.6.17	SA event triggered reporting tests with Pre-MG.....	2350
A.6.6.17.1	SA event triggered reporting tests with autonomous activation/deactivation Pre-MG	2350
A.6.6.17.1.1	Test purpose and Environment.....	2350
A.6.6.17.1.2	Test parameters.....	2350
A.6.6.17.1.3	Test Requirements.....	2353
A.6.6.17.2	SA event triggered reporting tests with pre-configured measurement gaps and network-controlled activation/deactivation	2353
A.6.6.17.2.1	Test purpose and Environment.....	2353
A.6.6.17.2.2	Test parameters.....	2354
A.6.6.17.2.3	Test Requirements.....	2356
A.6.6.17.3	Void.....	2356
A.6.6.17.3.1	Void.....	2356
A.6.6.17.3.2	Void.....	2356
A.6.6.17.3.3	Void.....	2356
A.6.6.18	SA event triggered reporting tests with concurrent gaps	2357
A.6.6.18.1	SA event triggered reporting tests for FR1 concurrent gaps with non-overlapping scenario for SSB-based measurements in both inter-frequency layers	2357
A.6.6.18.1.1	Test Purpose and Environment.....	2357
A.6.6.18.1.2	Test Requirements.....	2359
A.6.6.18.2	SA event triggered reporting tests for FR1 concurrent gap with partially partial overlapping scenario for SSB-based measurements in both inter-frequency layers.....	2360
A.6.6.18.2.1	Test Purpose and Environment.....	2360
A.6.6.18.2.2	Test Requirements.....	2362
A.6.6.18.3	SA NR - E-UTRAN and NR FR1 concurrent event-triggered reporting in non-DRX in FR1	2363
A.6.6.18.3.1	Test Purpose and Environment.....	2363
A.6.6.18.3.2	Test Requirements.....	2367
A.6.6.18.4	SA event triggered reporting tests for PRS and SSB measurement in FR1 without SSB time index detection when DRX is not used	2368
A.6.6.18.4.1	Test Purpose and Environment.....	2368
A.6.6.18.4.2	Test Requirements.....	2371
A.6.6.19	SA event triggered reporting tests with NCSG	2371
A.6.6.19.1	SA event triggered reporting tests with NCSG under non-DRX in FR1.....	2371
A.6.6.19.1.1	Test purpose and Environment.....	2371
A.6.6.19.1.2	Test parameters.....	2371

A.6.6.19.1.3	Test Requirements	2373
A.6.6.19.2	SA event triggered reporting tests for FR1 with NCSG for inter-frequency measurement.....	2374
A.6.6.19.2.1	Test Purpose and Environment.....	2374
A.6.6.19.2.2	Test parameters.....	2374
A.6.6.19.2.3	Test Requirements	2377
A.6.6.19.3	SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1 with NCSG	2377
A.6.6.19.3.1	Test Purpose and Environment.....	2377
A.6.6.19.3.2	Test parameters.....	2377
A.6.6.19.3.3	Test Requirements	2381
A.6.6.19.4	Event triggered reporting on SCC with deactivated SCell test with per-UE NCSG under non-DRX	2381
A.6.6.19.4.1	Test purpose and Environment	2381
A.6.6.19.4.2	Test parameters.....	2381
A.6.6.19.4.3	Test Requirements	2383
A.6.6.20	UE Rx-Tx time difference measurement for propagation delay compensation	2383
A.6.6.20.1	Test purpose and environment	2383
A.6.6.20.2	Test requirements	2385
A.6.6.21	UE Rx-Tx time difference measurement with TRS for RTT-based PDC in FR1 SA.....	2386
A.6.6.21.1	Test purpose and environment	2386
A.6.6.21.2	Test requirements	2388
A.6.7	Measurement Performance requirements	2388
A.6.7.1	SS-RSRP	2388
A.6.7.1.1	SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell	2388
A.6.7.1.1.1	Test Purpose and Environment.....	2388
A.6.7.1.1.2	Test parameters.....	2388
A.6.7.1.1.3	Test Requirements	2392
A.6.7.1.2	SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell	2392
A.6.7.1.2.1	Test Purpose and Environment.....	2392
A.6.7.1.2.2	Test parameters.....	2392
A.6.7.1.2.3	Test Requirements	2395
A.6.7.1.3	Void.....	2395
A.6.7.2	SS-RSRQ	2395
A.6.7.2.1	SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell	2395
A.6.7.2.1.1	Test Purpose and Environment.....	2395
A.6.7.2.1.2	Test Parameters	2395
A.6.7.2.1.3	Test Requirements	2399
A.6.7.2.2	SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell	2399
A.6.7.2.2.1	Test Purpose and Environment.....	2399
A.6.7.2.2.2	Test Parameters	2399
A.6.7.2.2.3	Test Requirements	2403
A.6.7.3	SS-SINR	2403
A.6.7.3.1	SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell	2403
A.6.7.3.1.1	Test Purpose and Environment.....	2403
A.6.7.3.1.2	Test Parameters	2403
A.6.7.3.1.3	Test Requirements	2406
A.6.7.3.2	SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell	2406
A.6.7.3.2.1	Test Purpose and Environment.....	2406
A.6.7.3.2.2	Test Parameters	2406
A.6.7.3.2.3	Test Requirements	2410
A.6.7.4	L1-RSRP measurement for beam reporting	2410
A.6.7.4.1	SSB based L1-RSRP measurement.....	2410
A.6.7.4.1.1	Test Purpose and Environment.....	2410
A.6.7.4.1.2	Test parameters.....	2410
A.6.7.4.1.3	Test Requirements	2413
A.6.7.4.2	CSI-RS based L1-RSRP measurement on resource set with repetition off.....	2413
A.6.7.4.2.1	Test Purpose and Environment.....	2413
A.6.7.4.2.2	Test parameters.....	2413
A.6.7.4.2.3	Test Requirements	2416
A.6.7.5	E-UTRAN RSRP	2416
A.6.7.5.1	SA: inter-RAT measurement accuracy with FR1 serving cell	2416
A.6.7.5.1.1	Test Purpose and Environment.....	2416
A.6.7.5.1.2	Test parameters.....	2416

A.6.7.5.1.3	Test Requirements	2420
A.6.7.6	E-UTRAN RSRQ	2420
A.6.7.6.1	SA: inter-RAT measurement accuracy with FR1 serving cell	2420
A.6.7.6.1.1	Test Purpose and Environment.....	2420
A.6.7.6.1.2	Test parameters.....	2420
A.6.7.6.1.3	Test Requirements	2423
A.6.7.7	E-UTRAN RS-SINR.....	2424
A.6.7.7.1	SA: inter-RAT measurement accuracy with FR1 serving cell	2424
A.6.7.7.1.1	Test Purpose and Environment.....	2424
A.6.7.7.1.2	Test parameters.....	2424
A.6.7.7.1.3	Test Requirements	2427
A.6.7.8	CLI measurements	2427
A.6.7.8.1	SA SRS-RSRP measurement accuracy with FR1 serving cell.....	2427
A.6.7.8.1.1	Test Purpose and Environment.....	2427
A.6.7.8.1.2	Test parameters.....	2428
A.6.7.8.1.3	Test Requirements.....	2431
A.6.7.8.2	SA CLI-RSSI measurement accuracy with FR1 serving cell.....	2431
A.6.7.8.2.1	Test Purpose and Environment.....	2431
A.6.7.8.2.2	Test parameters.....	2431
A.6.7.8.2.3	Test Requirements	2433
A.6.7.9	L1-SINR measurement for beam reporting	2433
A.6.7.9.2	L1-SINR measurement with SSB based CMR and dedicated IMR	2437
A.6.7.9.2.1	Test Purpose and Environment.....	2437
A.6.7.9.2.2	Test parameters.....	2437
A.6.7.9.2.3	Test Requirements	2440
A.6.7.9.3	L1-SINR measurement with CSI-RS based CMR and dedicated IMR	2440
A.6.7.9.3.1	Test Purpose and Environment.....	2440
A.6.7.9.3.2	Test parameters.....	2441
A.6.7.9.3.3	Test Requirements	2444
A.6.7.10	CSI-RSRP	2444
A.6.7.10.1	SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell	2444
A.6.7.9.10.1	Test Purpose and Environment.....	2444
A.6.7.9.10.2	Test parameters.....	2444
A.6.7.10.1.3	Test Requirements	2448
A.6.7.10.2	SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell	2448
A.6.7.9.10.1	Test Purpose and Environment.....	2448
A.6.7.10.2.2	Test parameters.....	2448
A.6.7.10.2.3	Test Requirements	2452
A.6.7.11	CSI-RSRQ	2452
A.6.7.11.1	SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell	2452
A.6.7.11.1.1	Test Purpose and Environment.....	2452
A.6.7.11.1.2	Test Parameters	2452
A.6.7.11.1.3	Test Requirements	2456
A.6.7.11.2	SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell	2456
A.6.7.11.2.1	Test Purpose and Environment.....	2456
A.6.7.11.2.2	Test Parameters	2456
A.6.7.11.2.3	Test Requirements	2460
A.6.7.12	CSI-SINR.....	2461
A.6.7.12.1	SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell	2461
A.6.7.12.1.1	Test Purpose and Environment.....	2461
A.6.7.12.1.2	Test Parameters	2461
A.6.7.12.1.3	Test Requirements	2464
A.6.7.12.2	SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell	2464
A.6.7.12.2.1	Test Purpose and Environment.....	2464
A.6.7.12.2.2	Test Parameters	2464
A.6.7.12.2.3	Test Requirements	2469
A.6.7.13	RSTD measurements	2469
A.6.7.13.1	RSTD measurement accuracy test case for single positioning frequency layer	2469
A.6.7.13.1.1	Test purpose and Environment.....	2469
A.6.7.13.1.2	Test Requirements	2471
A.6.7.13.2	RSTD measurement accuracy test case for dual positioning frequency layer.....	2471
A.6.7.13.2.1	Test purpose and Environment.....	2471

A.6.7.13.2.2	Test Requirements	2473
A.6.7.13.3	RSTD measurement accuracy test case with reduced number of samples for single positioning frequency layer in FR1 in RRC_CONNECTED state	2473
A.6.7.13.3.1	Test purpose and Environment	2473
A.6.7.13.3.2	Test Requirements	2476
A.6.7.13.4	RSTD measurement accuracy test case with Rx TEG	2476
A.6.7.14	PRS-RSRP measurements	2478
A.6.7.14.1	SA: measurement accuracy with PRS in FR1	2478
A.6.7.14.1.1	Test Purpose and Environment	2478
A.6.7.14.1.2	Test parameters	2478
A.6.7.14.1.3	Test Requirements	2481
A.6.7.14.2	SA: measurement accuracy with PRS in FR1 with reduced sample number	2481
A.6.7.14.2.1	Test Purpose and Environment	2481
A.6.7.14.2.2	Test parameters	2481
A.6.7.14.2.3	Test Requirements	2484
A.6.7.14.3	Void	2484
A.6.7.14.3.1	Void	2484
A.6.7.14.3.2	Void	2484
A.6.7.14.3.3	Void	2484
A.6.7.15	UE Rx-Tx time difference measurements	2484
A.6.7.15.1	UE Rx-Tx time difference measurement accuracy for single positioning frequency layer in FR1 SA	2484
A.6.7.15.1.1	Test purpose and environment	2484
A.6.7.15.1.2	Test parameters	2485
A.6.7.15.1.3	Test requirements	2487
A.6.7.15.2	UE Rx-Tx time difference measurement accuracy with reduced number of samples in FR1 SA	2487
A.6.7.15.2.1	Test purpose and environment	2487
A.6.7.15.2.2	Test parameters	2487
A.6.7.15.2.3	Test requirements	2489
A.6.7.15.3	UE Rx-Tx time difference measurement accuracy with RxTx TEG	2489
A.6.7.15.3.1	Test purpose and environment	2489
A.6.7.15.3.2	Test parameters	2490
A.6.7.15.3.3	Test requirements	2491
A.6.7.16	PRS-RSRPP measurements	2492
A.6.7.16.1	SA: measurement accuracy with PRS in FR1	2492
A.6.7.16.1.1	Test Purpose and Environment	2492
A.6.7.16.1.2	Test parameters	2492
A.6.7.16.1.3	Test Requirements	2495
A.6.7.16.2	SA: measurement accuracy with reduced PRS samples in FR1	2495
A.6.7.16.2.1	Test Purpose and Environment	2495
A.6.7.16.2.2	Test parameters	2495
A.6.8	Measurement procedure in RRC_INACTIVE	2497
A.6.8.1	RSTD measurements	2497
A.6.8.1.1	NR RSTD measurement reporting delay test case for single positioning frequency layer in FR1 SA in RRC_INACTIVE state	2497
A.6.8.1.1.1	Test Purpose and Environment	2497
A.6.8.1.1.2	Test Requirements	2501
A.6.8.1.2	NR RSTD measurement reporting delay test case with reduced number of samples in RRC_INACTIVE, FR1 SA	2501
A.6.8.1.2.1	Test Purpose and Environment	2501
A.6.8.1.2.2	Test Requirements	2505
A.6.8.2	PRS-RSRP measurements	2505
A.6.8.2.1	PRS-RSRP reporting delay test case for single positioning frequency layer in RRC_INACTIVE	2505
A.6.8.2.1.1	Test purpose and Environment	2505
A.6.8.2.1.2	Test Requirements	2507
A.6.8.2.2	PRS-RSRP reporting delay test case with reduced number of samples in RRC_INACTIVE	2508
A.6.8.2.2.1	Test purpose and Environment	2508
A.6.8.2.2.2	Test Requirements	2512
A.6.8.3	UE Rx-Tx time difference measurements	2512
A.6.8.3.1	UE Rx-Tx time difference measurement for single positioning frequency layer in FR1 SA	2512
A.6.8.3.1.1	Test purpose and environment	2512
A.6.8.3.1.2	Test requirements	2514

A.6.8.3.2	UE Rx-Tx time difference measurement with reduced number of samples in RRC_INACTIVE, FR1 SA.....	2515
A.6.8.3.2.1	Test purpose and environment.....	2515
A.6.8.3.2.2	Test requirements	2517
A.6.8.4	PRS-RSRPP measurements	2518
A.6.8.4.1	PRS-RSRPP reporting delay test case for single positioning frequency layer in FR1 in RRC_INACTIVE state.....	2518
A.6.8.4.1.1	Test purpose and Environment.....	2518
A.6.8.4.1.2	Test Requirements.....	2520
A.6.8.4.2	PRS-RSRPP reporting delay test case for single positioning frequency layer in FR1 in RRC_INACTIVE state for reduced number of samples	2520
A.6.8.4.2.1	Test purpose and Environment.....	2520
A.6.8.4.2.2	Test Requirements.....	2522
A.6.9	Measurement performance requirements in RRC_INACTIVE.....	2523
A.6.9.1	RSTD measurements	2523
A.6.9.1.1	RSTD measurement accuracy test case for single positioning frequency layer in FR1 in RRC_INACTIVE state.....	2523
A.6.9.1.1.1	Test purpose and Environment.....	2523
A.6.9.1.1.2	Test Requirements.....	2525
A.6.9.1.2	RSTD measurement accuracy test case with reduced number of samples for single positioning frequency layer in FR1 in RRC_INACTIVE state.....	2525
A.6.9.1.2.1	Test purpose and Environment.....	2525
A.6.9.1.2.2	Test Requirements.....	2527
A.6.9.2	PRS-RSRP measurements	2527
A.6.9.2.1	SA: measurement accuracy with PRS in FR1 in RRC_INACTIVE	2527
A.6.9.2.1.1	Test Purpose and Environment.....	2527
A.6.9.2.1.2	Test parameters.....	2528
A.6.9.2.1.3	Test Requirements.....	2530
A.6.9.2.2	SA: measurement accuracy with PRS in FR1 with reduced number of samples in RRC_INACTIVE state.....	2530
A.6.9.2.2.1	Test Purpose and Environment.....	2530
A.6.9.2.2.2	Test parameters.....	2531
A.6.9.2.2.3	Test Requirements.....	2533
A.6.9.3	UE Rx-Tx time difference measurements.....	2533
A.6.9.3.1.1	UE Rx-Tx time difference measurement accuracy in FR1 SA	2533
A.6.9.3.1.1.1	Test purpose and environment.....	2533
A.6.9.3.1.1.2	Test parameters.....	2533
A.6.9.3.1.1.3	Test requirements	2535
A.6.9.3.2	UE Rx-Tx time difference measurement accuracy with reduced number of samples.....	2535
A.6.9.3.2.1	Test purpose and environment.....	2535
A.6.9.3.2.2	Test parameters.....	2536
A.6.9.3.2.3	Test requirements	2537
A.6.9.4	PRS-RSRPP measurements	2537
A.6.9.4.1	SA: PRS-RSRPP measurement accuracy in FR1 in RRC INACTIVE	2537
A.6.9.4.1.1	Test Purpose and Environment.....	2537
A.6.9.4.1.2	Test parameters.....	2537
A.6.9.4.1.3	Test Requirements.....	2540
A.6.9.4.2	SA: measurement accuracy with reduced PRS samples in FR1 in RRC INACTIVE	2540
A.6.9.4.2.1	Test Purpose and Environment.....	2540
A.6.9.4.2.2	Test parameters.....	2540
A.6.9.4.2.3	Test Requirements.....	2542
A.7	NR standalone tests with one or more NR cells in FR2	2543
A.7.1	SA: RRC_IDLE state mobility.....	2543
A.7.1.1	Cell re-selection to NR	2543
A.7.1.1.1	Cell reselection to FR2 intra-frequency NR case	2543
A.7.1.1.1.1	Test Purpose and Environment.....	2543
A.7.1.1.1.2	Test Parameters	2543
A.7.1.1.1.3	Test Requirements.....	2545
A.7.1.1.2	Cell reselection to FR2 inter-frequency NR case	2546
A.7.1.1.2.1	Test Purpose and Environment.....	2546
A.7.1.1.2.2	Test Parameters	2546

A.7.1.1.2.3	Test Requirements	2548
A.7.1.1.3	Cell reselection to FR2 intra-frequency NR case for UE fulfilling low mobility relaxed measurement criterion	2549
A.7.1.1.3.1	Test Purpose and Environment	2549
A.7.1.1.3.2	Test Parameters	2549
A.7.1.1.3.3	Test Requirements	2551
A.7.1.1.4	Cell reselection to FR2 intra-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion	2551
A.7.1.1.4.1	Test Purpose and Environment	2551
A.7.1.1.4.2	Test Parameters	2551
A.7.1.1.4.3	Test Requirements	2553
A.7.1.1.5	Cell reselection to FR2 inter-frequency NR case for UE fulfilling low mobility relaxed measurement criterion	2554
A.7.1.1.5.1	Test Purpose and Environment	2554
A.7.1.1.5.2	Test Parameters	2554
A.7.1.1.5.3	Test Requirements	2556
A.7.1.1.6	Cell reselection to FR2 inter-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion	2556
A.7.1.1.6.1	Test Purpose and Environment	2556
A.7.1.1.6.2	Test Parameters	2557
A.7.1.1.6.3	Test Requirements	2559
A.7.1.1.7	Cell reselection to FR2 intra-frequency NR case for FR2 power class 6 UE configured with <i>highSpeedMeasFlagFR2-r17</i>	2559
A.7.1.1.7.1	Test Purpose and Environment	2559
A.7.1.1.7.2	Test Parameters	2559
A.7.1.1.7.3	Test Requirements	2561
A.7.2	SA: RRC_INACTIVE state mobility	2562
A.7.2.1	Small Data Transmission	2562
A.7.2.1.1	TA validation for CG-SDT in FR2	2562
A.7.2.1.1.1	Test Purpose and Environment	2562
A.7.2.1.1.2	Test Requirements	2565
A.7.3	RRC_CONNECTED state mobility	2565
A.7.3.1	Handover	2565
A.7.3.1.1	Inter-frequency handover from FR1 to FR2; unknown target cell	2565
A.7.3.1.1.1	Test Purpose and Environment	2565
A.7.3.1.1.2	Test Parameters	2565
A.7.3.1.1.3	Test Requirements	2568
A.7.3.1.2	Intra-frequency handover from FR2 to FR2; unknown target cell	2568
A.7.3.1.2.1	Test Purpose and Environment	2568
A.7.3.1.2.2	Test Parameters	2568
A.7.3.1.2.3	Test Requirements	2569
A.7.3.1.3	Inter-frequency handover from FR2 to FR2; unknown target cell	2570
A.7.3.1.3.1	Test Purpose and Environment	2570
A.7.3.1.3.2	Test Parameters	2570
A.7.3.1.3.3	Test Requirements	2571
A.7.3.1.4	Inter-band inter-frequency synchronous DAPS handover from FR1 to FR2	2572
A.7.3.1.4.1	Test Purpose and Environment	2572
A.7.3.1.4.2	Test Parameters	2572
A.7.3.1.4.3	Test Requirements	2575
A.7.3.1.5	Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR2	2576
A.7.3.1.5.1	Test Purpose and Environment	2576
A.7.3.1.5.2	Test Parameters	2576
A.7.3.1.5.3	Test Requirements	2580
A.7.3.1.6	Handover with PSCell from SA to EN-DC with; unknown FR2 target PSCell	2580
A.7.3.1.6.1	Test Purpose and Environment	2580
A.7.3.1.6.2	Test Parameters	2580
A.7.3.1.6.3	Test Requirements	2585
A.7.3.1.7	HO with PSCell from FR1 NR-SA to EN-DC with known E-UTRA PCell and known FR2 PSCell	2586
A.7.3.1.7.1	Test purpose and environment	2586
A.7.3.1.7.2	Test Requirements	2591
A.7.3.1.8	NR PSCell change delay in HO with PSCell from NR-DC to NR-DC	2591

A.7.3.1.8.1	Test Purpose and Environment.....	2591
A.7.3.1.8.2	Test Requirements.....	2595
A.7.3.1.9	Intra-frequency handover from FR2-2 to FR2-2; unknown target cell	2595
A.7.3.1.9.1	Test Purpose and Environment.....	2595
A.7.3.1.9.2	Test Parameters	2595
A.7.3.1.9.3	Test Requirements.....	2597
A.7.3.1.10	Inter-frequency handover from FR2-2 to FR2-2; unknown target cell	2597
A.7.3.1.10.1	Test Purpose and Environment.....	2597
A.7.3.1.10.2	Test Parameters	2598
A.7.3.1.10.3	Test Requirements.....	2600
A.7.3.1.11	Inter-frequency handover from FR1 to FR2-2; unknown target cell.....	2600
A.7.3.1.11.1	Test Purpose and Environment.....	2600
A.7.3.1.11.2	Test Parameters	2600
A.7.3.1.11.3	Test Requirements.....	2602
A.7.3.2	RRC Connection Mobility Control.....	2603
A.7.3.2.1	SA: RRC Re-establishment.....	2603
A.7.3.2.1.1	Intra-frequency RRC Re-establishment in FR2.....	2603
A.7.3.2.1.2	Inter-frequency RRC Re-establishment in FR2.....	2605
A.7.3.2.1.3	Intra-frequency RRC Re-establishment in FR2 without serving cell timing	2608
A.7.3.2.1.3.1	Test Purpose and Environment	2608
A.7.3.2.1.3.2	Test Requirements	2609
A.7.3.2.1.4	Intra-frequency RRC Re-establishment in FR2-2	2610
A.7.3.2.1.4.1	Test Purpose and Environment	2610
A.7.3.2.1.4.2	Test Requirements	2612
A.7.3.2.1.5	Inter-frequency RRC Re-establishment in FR2-2	2612
A.7.3.2.1.5.1	Test Purpose and Environment	2612
A.7.3.2.1.5.2	Test Requirements	2614
A.7.3.2.1.6	Intra-frequency RRC Re-establishment in FR2-2 without serving cell timing.....	2615
A.7.3.2.1.6.1	Test Purpose and Environment	2615
A.7.3.2.1.6.2	Test Requirements	2617
A.7.3.2.2	Random Access.....	2617
A.7.3.2.2.1	4-step RA type contention based random access test in FR2 for NR Standalone.....	2617
A.7.3.2.2.2	4-step RA type non-contention based random access test in FR2 for NR Standalone	2621
A.7.3.2.2.3	2-step RA type contention based random access test in FR2 for NR Standalone.....	2624
A.7.3.2.2.4	2-step RA type non-contention based random access test in FR2 for NR Standalone	2627
A.7.3.2.3	SA: RRC Connection Release with Redirection	2630
A.7.3.2.3.1	Redirection from NR in FR2 to NR in FR2.....	2630
A.7.3.3	Conditional Handover	2632
A.7.3.3.1	Intra-frequency conditional handover from FR2 to FR2.....	2632
A.7.3.3.1.1	Test Purpose and Environment.....	2632
A.7.3.3.1.2	Test Parameters	2632
A.7.3.3.1.2.3	Test Requirements.....	2634
A.7.3.3.2	Inter-frequency conditional handover from FR2 to FR2; unknown target cell	2634
A.7.3.3.2.1	Test Purpose and Environment.....	2634
A.7.3.3.2.2	Test Parameters	2634
A.7.3.3.2.3	Test Requirements	2636
A.7.4	Timing	2636
A.7.4.1	UE transmit timing	2636
A.7.4.1.1	NR UE Transmit Timing Test for FR2	2636
A.7.4.1.1.1	Test Purpose and environment	2636
A.7.4.1.1.2	Test requirements	2638
A.7.4.1.2	NR UE Transmit Timing Test for FR2-2	2639
A.7.4.1.2.1	Test Purpose and environment	2639
A.7.4.1.2.2	Test requirements	2642
A.7.4.2	UE timer accuracy	2642
A.7.4.3	Timing advance	2642
A.7.4.3.1	SA FR2 timing advance adjustment accuracy.....	2642
A.7.4.3.1.1	Test Purpose and Environment.....	2642
A.7.4.3.1.2	Test Parameters	2643
A.7.4.3.1.3	Test Requirements	2645
A.7.4.3.2	SA FR2-2 timing advance adjustment accuracy	2645
A.7.4.3.2.1	Test Purpose and Environment.....	2645

A.7.4.3.2.2	Test Parameters	2646
A.7.4.3.2.3	Test Requirements	2648
A.7.5	Signaling characteristics	2648
A.7.5.1	Radio link Monitoring	2648
A.7.5.1.1	Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode	2649
A.7.5.1.1.1	Test Purpose and Environment	2649
A.7.5.1.1.2	Test Requirements	2652
A.7.5.1.2	Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode	2652
A.7.5.1.2.1	Test Purpose and Environment	2652
A.7.5.1.2.2	Test Requirements	2655
A.7.5.1.3	Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode	2656
A.7.5.1.3.1	Test Purpose and Environment	2656
A.7.5.1.3.2	Test Requirements	2658
A.7.5.1.4	Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode	2658
A.7.5.1.4.1	Test Purpose and Environment	2658
A.7.5.1.4.2	Test Requirements	2661
A.7.5.1.5	Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode	2661
A.7.5.1.5.1	Test Purpose and Environment	2661
A.7.5.1.5.2	Test Requirements	2664
A.7.5.1.6	Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode	2665
A.7.5.1.6.1	Test Purpose and Environment	2665
A.7.5.1.6.2	Test Requirements	2667
A.7.5.1.7	Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode	2668
A.7.5.1.7.1	Test Purpose and Environment	2668
A.7.5.1.7.2	Test Requirements	2670
A.7.5.1.8	Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode	2671
A.7.5.1.8.1	Test Purpose and Environment	2671
A.7.5.1.8.2	Test Requirements	2674
A.7.5.1.9	UE Radio Link Monitoring Scheduling Restrictions on FR2	2674
A.7.5.1.9.1	Test Purpose and Environment	2674
A.7.5.1.9.2	Test Requirements	2676
A.7.5.2	Interruption	2676
A.7.5.2.1	Interruptions during measurements on deactivated NR SCC in FR2	2676
A.7.5.2.1.1	Test Purpose and Environment	2676
A.7.5.2.1.2	Test Requirements	2679
A.7.5.2.2	SA interruptions at NR SRS carrier-based switching	2679
A.7.5.2.2.1	Test Purpose and Environment	2679
A.7.5.2.2.2	Test Parameters	2679
A.7.5.2.2.3	Test Requirements	2681
A.7.5.3	SCell Activation and Deactivation Delay	2682
A.7.5.3.1	SCell Activation and deactivation for SCell in FR2 intra-band in non-DRX	2682
A.7.5.3.1.1	Test Purpose and Environment	2682
A.7.5.3.1.2	Test Requirements	2683
A.7.5.3.2	SCell Activation and deactivation for FR1+FR2 inter-band with target SCell in FR2	2683
A.7.5.3.2.1	Test Purpose and Environment	2683
A.7.5.3.2.2	Test Requirements	2686
A.7.5.3.3	SCell Activation and deactivation for SCell in FR2 inter-band in non-DRX	2687
A.7.5.3.3.1	Test Purpose and Environment	2687
A.7.5.3.3.2	Test Requirements	2689
A.7.5.3.4	Direct SCell activation at SCell addition of known SCell in FR2	2690
A.7.5.3.4.1	Test Purpose and Environment	2690
A.7.5.3.4.2	Test Requirements	2693
A.7.5.3.5	Direct SCell activation at handover with known SCell in FR2	2693
A.7.5.3.5.1	Test Purpose and Environment	2693

A.7.5.3.5.2	Test Requirements	2696
A.7.5.3.6	PUCCH SCell activation and deactivation for FR1+FR2 inter-band with target SCell in FR2 and known	2697
A.7.5.3.6.1	Test Purpose and Environment	2697
A.7.5.3.6.2	Test Requirements	2700
A.7.5.3.7	PUCCH SCell activation and deactivation delay requirements of FR2 unknown cell with FR1 PCell	2700
A.7.5.3.7.1	Test Purpose and Environment	2700
A.7.5.3.7.2	Test Requirements	2704
A.7.5.3.8	SCell Activation and deactivation for known PUCCH SCell in FR2 inter-band in non-DRX	2704
A.7.5.3.8.1	Test Purpose and Environment	2704
A.7.5.3.8.2	Test Requirements	2708
A.7.5.3.9	PUCCH SCell Activation and deactivation of unknown SCell in FR2	2708
A.7.5.3.9.1	Test Purpose and Environment	2708
A.7.5.3.9.2	Test Requirements	2711
A.7.5.3.10	SCell Activation and deactivation of FR2 known PUCCH SCell and one FR2 unknown SCell with FR2 PCell	2712
A.7.5.3.10.1	Test Purpose and Environment	2712
A.7.5.3.10.2	Test Requirements	2715
A.7.5.3.11	PUCCH SCell activation and deactivation delay requirements of FR2 unknown cell with FR2 PCell	2717
A.7.5.3.11.1	PUCCH SCell activation with non-PUCCH SCell in a secondary PUCCH Group	2717
A.7.5.3.11.1.1	Test Purpose and Environment	2717
A.7.5.3.11.1.2	Test Requirements	2721
A.7.5.3.11.2	PUCCH SCell activation with non-PUCCH SCell in a primary PUCCH Group	2721
A.7.5.3.11.2.1	Test Purpose and Environment	2721
A.7.5.3.11.2.2	Test Requirements	2725
A.7.5.3.12	Void	2726
A.7.5.3.13	SCell Activation for SCell in FR2 intra-band in non-DRX	2726
A.7.5.3.13.1	Test Purpose and Environment	2726
A.7.5.3.13.2	Test Requirements	2728
A.7.5.3.14	SCell Activation for known SCell in FR2 inter-band	2728
A.7.5.3.14.1	Test Purpose and Environment	2728
A.7.5.3.14.2	Test Requirements	2731
A.7.5.15	Void	2731
A.7.5.4	Void	2731
A.7.5.5	Beam Failure Detection and Link recovery procedures	2731
A.7.5.5.1	Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode	2731
A.7.5.5.1.1	Test Purpose and Environment	2731
A.7.5.5.1.2	Test Requirements	2735
A.7.5.5.2	Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode	2735
A.7.5.5.2.1	Test Purpose and Environment	2735
A.7.5.5.2.2	Test Requirements	2739
A.7.5.5.3	Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode	2739
A.7.5.5.3.1	Test Purpose and Environment	2739
A.7.5.5.3.2	Test Requirements	2743
A.7.5.5.4	Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode	2743
A.7.5.5.4.1	Test Purpose and Environment	2743
A.7.5.5.4.2	Test Requirements	2747
A.7.5.5.5	Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode	2747
A.7.5.5.5.1	Test Purpose and Environment	2747
A.7.5.5.5.2	Test Requirements	2751
A.7.5.5.6	Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in non-DRX mode	2751
A.7.5.5.6.1	Test Purpose and Environment	2751
A.7.5.5.6.2	Test Requirements	2755

A.7.5.5.7	Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in DRX mode	2755
A.7.5.5.7.1	Test Purpose and Environment	2755
A.7.5.5.7.2	Test Requirements	2759
A.7.5.5.8	Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode for UE fulfilling relaxed measurement criterion	2759
A.7.5.5.8.1	Test Purpose and Environment	2759
A.7.5.5.8.2	Test Requirements	2762
A.7.5.5.9	TRP specific Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in DRX mode	2763
A.7.5.5.9.1	Test Purpose and Environment	2763
A.7.5.5.9.2	Test Requirements	2766
A.7.5.5.10	TRP specific Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode	2767
A.7.5.5.10.1	Test Purpose and Environment	2767
A.7.5.5.10.2	Test Requirements	2770
A.7.5.5.11	Beam Failure Detection and Link Recovery Test for FR2-2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode	2771
A.7.5.5.11.1	Test Purpose and Environment	2771
A.7.5.5.11.2	Test Requirements	2774
A.7.5.5.12	Beam Failure Detection and Link Recovery Test for FR2-2 PCell configured with CSI-RS-based BFD and LR in DRX mode	2774
A.7.5.5.12.1	Test Purpose and Environment	2774
A.7.5.5.12.2	Test Requirements	2777
A.7.5.5.13	Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2-2 PCell configured with SSB-based BFD and LR in non-DRX mode	2778
A.7.5.5.13.1	Test Purpose and Environment	2778
A.7.5.5.13.2	Test Requirements	2781
A.7.5.6	Active BWP switch	2781
A.7.5.6.1	DCI-based and Timer-based Active BWP Switch	2781
A.7.5.6.1.1	NR FR2- NR FR2 DL active BWP switch of SCell with non-DRX in SA	2781
A.7.5.6.1.2	NR FR1- NR FR2 DL active BWP switch of SCell with non-DRX in SA	2785
A.7.5.6.1.3	NR FR2 DL active BWP switch with non-DRX in SA	2789
A.7.5.6.1.3.1	Test Purpose and Environment	2789
A.7.5.6.1.3.2	Test Requirements	2791
A.7.5.6.1.4	NR FR2-2- NR FR2-2 DL active BWP switch of SCell with non-DRX in SA	2792
A.7.5.6.1.4.1	Test Purpose and Environment	2792
A.7.5.6.1.4.2	Test Requirements	2795
A.7.5.6.2	RRC-based Active BWP Switch	2796
A.7.5.6.2.1.1	Test Purpose and Environment	2796
A.7.5.6.2.1.2	Test Requirements	2799
A.7.5.6.2.2	NR FR2-2 DL active BWP switch of PCell with non-DRX in SA	2799
A.7.5.6.2.2.1	Test Purpose and Environment	2799
A.7.5.6.2.2.2	Test Requirements	2802
A.7.5.6.3	Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs	2802
A.7.5.6.3.1.1	Test Purpose and Environment	2802
A.7.5.6.3.1.2	Test Requirements	2806
A.7.5.6.4	SCell dormancy switch	2806
A.7.5.6.4.1	NR FR2 PCell SCell dormancy switch of single FR2 SCell inside active time	2806
A.7.5.6.4.1.1	Test Purpose and Environment	2806
A.7.5.6.4.1.2	Test Requirements	2809
A.7.5.6.4.2	NR FR1 PCell SCell dormancy switch of two FR2 SCells outside active time	2810
A.7.5.6.4.2.1	Test Purpose and Environment	2810
A.7.5.6.4.2.2	Test Requirements	2813
A.7.5.6.5	Simultaneous RRC-based Active BWP Switch on multiple CCs	2814
A.7.5.6.5.1	Active BWP switch on multiple SCells with non-DRX in SA	2814
A.7.5.6.5.2	NR FR2-2 Active BWP switch on multiple SCells with non-DRX in SA	2817
A.7.5.6.5.2.1	Test Purpose and Environment	2817
A.7.5.6.5.2.2	Test Requirements	2820
A.7.5.7	PSCell addition and release delay	2820
A.7.5.7.1	Addition and Release Delay of known NR PSCell	2820
A.7.5.7.1.1	Test Purpose and Environment	2820

A.7.5.7.1.2	Test Requirements	2823
A.7.5.7.2	Addition and Release Delay of unknown NR PSCell in	2823
A.7.5.7.2.1	Test Purpose and Environment	2823
A.7.5.7.2.2	Test Requirements	2825
A.7.5.7.3	Addition and Release Delay of known NR PSCell in FR2-2	2825
A.7.5.7.3.1	Test Purpose and Environment	2825
A.7.5.7.3.2	Test Requirements	2828
A.7.5.7.4	Addition and Release Delay of unknown NR PSCell in FR2-2	2828
A.7.5.7.4.1	Test Purpose and Environment	2828
A.7.5.7.4.2	Test Requirements	2830
A.7.5.8	Active TCI state switch delay	2831
A.7.5.8.1	MAC-CE based active TCI state switch	2831
A.7.5.8.2	RRC based active TCI state switch	2834
A.7.5.8.3	MAC-CE based active TCI state switch for HST FR2 scenario	2838
A.7.5.8.3.1	NR PCell FR2 HST active TCI state switch for a known TCI state	2838
A.7.5.8.3.1.1	Test Purpose and Environment	2838
A.7.5.8.3.1.2	Test Requirements	2842
A.7.5.9	Uplink spatial relation switch delay	2843
A.7.5.9.1.1.1	Test Purpose and Environment	2843
A.7.5.9.1.1.2	Test Requirements	2845
A.7.5.9.2	RRC based spatial relation switch	2845
A.7.5.9.2.1	NR PCell FR2 spatial relation switch associated with a known DL-RS	2845
A.7.5.9.2.1.1	Test Purpose and Environment	2845
A.7.5.9.2.1.2	Test Requirements	2848
A.7.5.10	UE specific CBW change	2848
A.7.5.10.1	NR FR2 UE specific CBW change of PCell with non-DRX in SA	2848
A.7.5.10.1.1	Test Purpose and Environment	2848
A.7.5.10.1.2	Test Requirements	2851
A.7.5.11	UE UL carrier RRC reconfiguration Delay	2851
A.7.5.11.1	UE UL carrier RRC reconfiguration Delay	2851
A.7.5.11.1.1	Test Purpose and Environment	2851
A.7.5.11.1.2	Test Requirements	2853
A.7.5.12	Conditional PSCell addition and release delay (FR2 SA)	2853
A.7.5.12.1	Addition and Release Delay of PSCell	2853
A.7.5.12.1.1	Test purpose and environment	2853
A.7.5.12.1.2	Test Parameters	2854
A.7.5.12.1.3	Test Requirements	2856
A.7.5.13	Unified TCI state switching delay	2856
A.7.5.13.1	MAC-CE based active joint TCI state switching	2856
A.7.5.13.1.1	NR PCell FR2 active joint TCI state switch for a known TCI state	2856
A.7.5.13.1.1.1	Test Purpose and Environment	2856
A.7.5.13.1.1.2	Test parameters	2857
A.7.5.13.1.1.3	Test Requirements	2859
A.7.5.13.2	MAC-CE based active uplink TCI state switch	2859
A.7.5.13.2.1	NR FR2 PCell uplink TCI state switch for a known TCI state	2859
A.7.5.13.2.1.1	Test Purpose and Environment	2859
A.7.5.13.2.1.2	Test parameters	2860
A.7.5.13.2.1.3	Test Requirements	2862
A.7.5.13.3	MAC-CE based active downlink TCI state switch	2862
A.7.5.13.3.1	NR PCell FR2 active downlink TCI state switch to cell with additional PCI for a known TCI state	2862
A.7.5.13.3.1.1	Test Purpose and Environment	2862
A.7.5.13.3.1.2	Test Parameters	2862
A.7.5.13.3.1.3	Test Requirements	2866
A.7.5.14	PSCell RACH-less based Activation and deactivation for FR1+FR2 inter-band with target PSCell in FR2	2866
A.7.5.14.1	Test Purpose and Environment	2866
A.7.5.14.2	Test Requirements	2869
A.7.6	Measurement procedure	2870
A.7.6.1	Intra-frequency Measurements	2870
A.7.6.1.1	SA event triggered reporting test without gap under non-DRX	2870
A.7.6.1.1.1	Test purpose and Environment	2870

A.7.6.1.1.2	Test Requirements	2872
A.7.6.1.2	SA event triggered reporting test without gap under DRX	2872
A.7.6.1.2.1	Test purpose and Environment	2872
A.7.6.1.2.2	Test Requirements	2875
A.7.6.1.3	SA event triggered reporting test with per-UE gaps under non-DRX	2875
A.7.6.1.3.1	Test purpose and Environment	2875
A.7.6.1.3.2	Test Requirements	2878
A.7.6.1.4	SA event triggered reporting test with per-UE gaps under DRX	2878
A.7.6.1.4.1	Test purpose and Environment	2878
A.7.6.1.4.2	Test Requirements	2881
A.7.6.1.5	SA event triggered reporting test without gap under non-DRX for UE configured with <i>highSpeedMeasFlagFR2-r17</i>	2881
A.7.6.1.5.1	Test purpose and Environment	2881
A.7.6.1.5.2	Test Requirements	2884
A.7.6.1.6	SA event triggered reporting test without gap under non-DRX for FR2-2	2884
A.7.6.1.6.1	Test purpose and Environment	2884
A.7.6.1.6.2	Test Requirements	2887
A.7.6.1.7	SA event triggered reporting test without gap under DRX for FR2-2	2887
A.7.6.1.7.1	Test purpose and Environment	2887
A.7.6.1.7.2	Test Requirements	2890
A.7.6.1.8	SA event triggered reporting test with per-UE gaps under non-DRX for FR2-2	2891
A.7.6.1.8.1	Test purpose and Environment	2891
A.7.6.1.8.2	Test Requirements	2894
A.7.6.1.9	SA event triggered reporting test with per-UE gaps under DRX for FR2-2	2894
A.7.6.1.9.1	Test purpose and Environment	2894
A.7.6.1.9.2	Test Requirements	2897
A.7.6.1.10	SA event triggered reporting test with SSB time index detection without gap under non-DRX for FR2-2	2897
A.7.6.1.10.1	Test purpose and Environment	2897
A.7.6.1.10.2	Test Requirements	2900
A.7.6.1.11	SA event triggered reporting test with SSB time index detection with per-UE gaps under non- DRX for FR2-2	2900
A.7.6.1.11.1	Test purpose and Environment	2900
A.7.6.1.11.2	Test Requirements	2903
A.7.6.2	Inter-frequency Measurements	2903
A.7.6.2.1	SA event triggered reporting tests for FR2 without SSB time index detection when DRX is not used (PCell in FR2)	2903
A.7.6.2.1.1	Test Purpose and Environment	2903
A.7.6.2.1.2	Test Requirements	2906
A.7.6.2.2	SA event triggered reporting tests for FR2 without SSB time index detection when DRX is used (Pcell in FR2)	2906
A.7.6.2.2.1	Test Purpose and Environment	2906
A.7.6.2.2.2	Test Requirements	2909
A.7.6.2.3	SA event triggered reporting tests for FR2 with SSB time index detection when DRX is not used (PCell in FR2)	2909
A.7.6.2.3.1	Test Purpose and Environment	2909
A.7.6.2.3.2	Test Requirements	2912
A.7.6.2.4	SA event triggered reporting tests for FR2 with SSB time index detection when DRX is used (Pcell in FR2)	2912
A.7.6.2.4.1	Test Purpose and Environment	2912
A.7.6.2.4.2	Test Requirements	2914
A.7.6.2.5	SA event triggered reporting tests for FR2 without SSB time index detection when DRX is not used (PCell in FR1)	2915
A.7.6.2.5.1	Test Purpose and Environment	2915
A.7.6.2.5.2	Test Requirements	2918
A.7.6.2.6	SA event triggered reporting tests for FR2 without SSB time index detection when DRX is used (Pcell in FR1)	2918
A.7.6.2.6.1	Test Purpose and Environment	2918
A.7.6.2.6.2	Test Requirements	2921
A.7.6.2.7	SA event triggered reporting tests for FR2 with SSB time index detection when DRX is not used (PCell in FR1)	2922
A.7.6.2.7.1	Test Purpose and Environment	2922

A.7.6.2.7.2	Test Requirements	2924
A.7.6.2.8	SA event triggered reporting tests for FR2 with SSB time index detection when DRX is used (PCell in FR1)	2925
A.7.6.2.8.1	Test Purpose and Environment	2925
A.7.6.2.8.2	Test Requirements	2928
A.7.6.2.9	SA event triggered reporting tests For FR2 without SSB time index detection when DRX is not used (PCell in FR2) (rel16 additional mandatory gap pattern 17)	2929
A.7.6.2.9.1	Test Purpose and Environment	2929
A.7.6.2.9.2	Test Requirements	2931
A.7.6.2.10	SA event triggered reporting test without gap under non-DRX	2931
A.7.6.2.10.1	Test Purpose and Environment	2931
A.7.6.2.10.2	Test Requirements	2933
A.7.6.2.11	SA event triggered reporting test without gap under DRX	2934
A.7.6.2.11.1	Test Purpose and Environment	2934
A.7.6.2.11.2	Test Requirements	2937
A.7.6.2.12	SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is not used (PCell in FR2-2)	2937
A.7.6.2.12.1	Test Purpose and Environment	2937
A.7.6.2.12.2	Test Requirements	2940
A.7.6.2.13	SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is used (PCell in FR2-2)	2941
A.7.6.2.13.1	Test Purpose and Environment	2941
A.7.6.2.13.2	Test Requirements	2943
A.7.6.2.14	SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is not used (PCell in FR2-2)	2944
A.7.6.2.14.1	Test Purpose and Environment	2944
A.7.6.2.14.2	Test Requirements	2947
A.7.6.2.15	SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is used (PCell in FR2-2)	2948
A.7.6.2.15.1	Test Purpose and Environment	2948
A.7.6.2.15.2	Test Requirements	2950
A.7.6.2.16	SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is not used (PCell in FR1)	2951
A.7.6.2.16.1	Test Purpose and Environment	2951
A.7.6.2.16.2	Test Requirements	2955
A.7.6.2.17	SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is used (PCell in FR1)	2956
A.7.6.2.17.1	Test Purpose and Environment	2956
A.7.6.2.17.2	Test Requirements	2960
A.7.6.2.18	SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is not used (PCell in FR1)	2961
A.7.6.2.18.1	Test Purpose and Environment	2961
A.7.6.2.18.2	Test Requirements	2965
A.7.6.2.19	SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is used (PCell in FR1)	2966
A.7.6.2.19.1	Test Purpose and Environment	2966
A.7.6.2.19.2	Test Requirements	2971
A.7.6.3	L1-RSRP measurement for beam reporting	2972
A.7.6.3.1	SSB based L1-RSRP measurement when DRX is not used	2972
A.7.6.3.1.1	Test Purpose and Environment	2972
A.7.6.3.1.2	Test parameters	2972
A.7.6.3.1.3	Test Requirements	2974
A.7.6.3.2	SSB based L1-RSRP measurement when DRX is used	2974
A.7.6.3.2.1	Test Purpose and Environment	2974
A.7.6.3.2.2	Test parameters	2974
A.7.6.3.2.3	Test Requirements	2976
A.7.6.3.3	CSI-RS based L1-RSRP measurement when DRX is not used	2976
A.7.6.3.3.1	Test Purpose and Environment	2976
A.7.6.3.3.2	Test parameters	2976
A.7.6.3.3.3	Test Requirements	2978
A.7.6.3.4	CSI-RS based L1-RSRP measurement when DRX is used	2978
A.7.6.3.4.1	Test Purpose and Environment	2978

A.7.6.3.4.2	Test parameters.....	2979
A.7.6.3.3.3	Test Requirements.....	2980
A.7.6.3.5	SSB based L1-RSRP measurement when DRX is used for power class 6 UE configured with <i>highSpeedMeasFlagFR2-r17</i>	2981
A.7.6.3.5.1	Test Purpose and Environment.....	2981
A.7.6.3.5.2	Test parameters.....	2981
A.7.6.3.5.3	Test Requirements.....	2983
A.7.6.3.6	Inter-cell SSB based L1-RSRP measurements on FR2 SCell when DRX is not used	2983
A.7.6.3.6.1	Test Purpose and Environment.....	2983
A.7.6.3.6.2	Test parameters.....	2984
A.7.6.3.6.3	Test Requirements.....	2987
A.7.6.3.7	SSB based L1-RSRP measurement for FR2-2 when DRX is used	2987
A.7.6.3.7.1	Test Purpose and Environment.....	2987
A.7.6.3.7.2	Test parameters.....	2987
A.7.6.3.7.3	Test Requirements.....	2989
A.7.6.4	CLI measurements	2989
A.7.6.4.1	SRS-RSRP measurement with non-DRX.....	2989
A.7.6.4.1.1	Test Purpose and Environment.....	2989
A.7.6.4.1.2	Test Parameters	2990
A.7.6.4.1.3	Test Requirements.....	2992
A.7.6.4.2	CLI-RSSI measurement with non-DRX.....	2992
A.7.6.4.2.1	Test Purpose and Environment.....	2992
A.7.6.4.2.2	Test Parameters	2992
A.7.6.4.2.3	Test Requirements.....	2994
A.7.6.5.1	SA interfrequency CGI reporting in autonomous gaps test (PCell in FR2).....	2994
A.7.6.5.1.1	Test Purpose and Environment.....	2994
A.7.6.5.1.2	Test Requirements.....	2997
A.7.6.6	L1-SINR measurement for beam reporting	2997
A.7.6.6.2	L1-SINR measurement with SSB based CMR and dedicated IMR when DRX is used	2999
A.7.6.6.2.1	Test Purpose and Environment.....	2999
A.7.6.6.2.2	Test parameters.....	3000
A.7.6.6.2.3	Test Requirements.....	3001
A.7.6.6.3	L1-SINR measurement with CSI-RS based CMR and dedicated IMR configured when DRX is used	3002
A.7.6.6.3.1	Test Purpose and Environment.....	3002
A.7.6.6.3.2	Test parameters.....	3002
A.7.6.6.3.3	Test Requirements.....	3004
A.7.6.7	CSI-RS based intra-frequency Measurements	3004
A.7.6.7.1	SA event triggered reporting test without gap under DRX for CSI-RS based intra-frequency measurement	3004
A.7.6.7.1.1	Test purpose and Environment.....	3004
A.7.6.7.1.2	Test Requirements.....	3006
A.7.6.8	CSI-RS based inter-frequency Measurements	3006
A.7.6.8.1	SA event triggered reporting tests for FR2 CSI-RS based measurement when non-DRX is used (PCell in FR2)	3006
A.7.6.8.1.1	Test Purpose and Environment.....	3006
A.7.6.8.1.2	Test Requirements.....	3009
A.7.6.9	RSTD measurements	3010
A.7.6.9.1	NR RSTD measurement reporting delay test case for single positioning frequency layer in FR2 SA	3010
A.7.6.9.1.1	Test Purpose and Environment.....	3010
A.7.6.9.1.2	Test Requirements.....	3014
A.7.6.9.2	NR RSTD measurement reporting delay test case for dual positioning frequency layers in FR2 SA	3014
A.7.6.9.2.1	Test Purpose and Environment.....	3014
A.7.6.9.2.2	Test Requirements.....	3018
A.7.6.9.3	NR RSTD measurement reporting delay test case for single positioning frequency layer with reduced number of samples in FR2 SA.....	3019
A.7.6.9.3.1	Test Purpose and Environment.....	3019
A.7.6.9.3.2	Test Requirements.....	3022
A.7.6.9.4	NR RSTD measurement reporting delay test case for single positioning frequency layer in FR2 SA without measurement gap	3023

A.7.6.9.4.1	Test Purpose and Environment.....	3023
A.7.6.9.4.2	Test Requirements.....	3026
A.7.6.9.5	NR RSTD measurement reporting delay test case for single positioning frequency layer in FR2 SA in RRC_CONNECTED state with Rx TEG.....	3027
A.7.6.9.5.1	Test Purpose and Environment.....	3027
A.7.6.9.5.2	Test Requirements.....	3030
A.7.6.10	PRS-RSRP measurements.....	3031
A.7.6.10.1	PRS-RSRP reporting delay test case for single positioning frequency layer.....	3031
A.7.6.10.1.1	Test Purpose and Environment.....	3031
A.7.6.10.1.2	Test Requirements.....	3034
A.7.6.10.2	PRS-RSRP reporting delay test case for dual positioning frequency layer.....	3034
A.7.6.10.2.1	Test Purpose and Environment.....	3034
A.7.6.10.2.2	Test Requirements.....	3036
A.7.6.10.3	PRS-RSRP reporting delay test case for reduced number of samples.....	3037
A.7.6.10.3.1	Test Purpose and Environment.....	3037
A.7.6.10.3.2	Test Requirements.....	3040
A.7.6.10.4	PRS-RSRP reporting delay test case for single positioning frequency layer outside MG	3040
A.7.6.10.4.1	Test Purpose and Environment.....	3040
A.7.6.10.4.2	Test Requirements.....	3043
A.7.6.11	UE Rx-Tx time difference measurements.....	3043
A.7.6.11.1	UE Rx-Tx time difference measurements for single positioning frequency layer in FR2 SA	3043
A.7.6.11.1.1	Test purpose and environment.....	3043
A.7.6.11.1.2	Test requirements	3046
A.7.6.11.2	UE Rx-Tx time difference measurement period for dual positioning frequency layers in FR2 SA ..	3046
A.7.6.11.2.1	Test purpose and environment.....	3046
A.7.6.11.2.2	Test requirements	3049
A.7.6.11.3	UE Rx-Tx time difference measurements for single positioning frequency layer in FR2 SA with reduced sample number.....	3049
A.7.6.11.3.1	Test purpose and environment.....	3049
A.7.6.11.3.2	Test requirements	3051
A.7.6.11.4	UE Rx-Tx time difference measurements without gaps in FR2 SA.....	3051
A.7.6.11.4.1	Test purpose and environment.....	3051
A.7.6.11.4.2	Test requirements	3053
A.7.6.11.5	UE Rx-Tx time difference measurements for single positioning frequency layer in FR2 SA with RxTx TEG.....	3054
A.7.6.11.5.1	Test purpose and environment.....	3054
A.7.6.11.5.2	Test requirements	3056
A.7.6.12	PRS-RSRPP measurements	3056
A.7.6.12.1	PRS-RSRPP reporting delay test case for single positioning frequency layer in FR2 in RRC_CONNECTED state	3056
A.7.6.12.1.1	Test Purpose and Environment.....	3056
A.7.6.12.1.2	Test Requirements.....	3059
A.7.6.12.2	PRS-RSRPP reporting delay test case for reduced number of samples for single positioning frequency layer in FR2 in RRC_CONNECTED state.....	3059
A.7.6.12.2.1	Test Purpose and Environment.....	3059
A.7.6.12.2.2	Test Requirements.....	3062
A.7.6.12.3	PRS-RSRPP reporting delay test case for gapless measurement in FR2	3062
A.7.6.12.3.1	Test Purpose and Environment.....	3062
A.7.6.12.3.2	Test Requirements.....	3065
A.7.6.13	UE Rx-Tx time difference measurements for PDC	3066
A.7.6.13.1	UE Rx-Tx time difference measurement for propagation delay compensation using PRS in FR2...	3066
A.7.6.13.1.1	Test purpose and environment.....	3066
A.7.6.13.1.2	Test requirements	3067
A.7.6.13.2	UE Rx-Tx time difference measurement for propagation delay compensation using TRS in FR2...	3068
A.7.6.13.2.1	Test purpose and environment.....	3068
A.7.6.13.2.2	Test requirements	3069
A.7.6.14	SA event triggered reporting tests with Pre-MG.....	3070
A.7.6.14.1	Intra-frequency measurement test with SA event triggered reporting tests: with autonomous activation/deactivation of Pre-MG in FR2	3070
A.7.6.14.1.1	Test purpose and Environment.....	3070
A.7.6.14.1.2	Test parameters.....	3070
A.7.6.14.1.3	Test Requirements	3072

A.7.6.14.2	Intra-frequency measurement test with SA event triggered reporting tests: with network-controlled activation/deactivation of Pre-MG in FR2	3073
A.7.6.14.2.1	Test purpose and Environment	3073
A.7.6.14.2.2	Test parameters	3073
A.7.6.14.2.3	Test Requirements	3075
A.7.6.15	SA event triggered reporting tests with concurrent gaps	3075
A.7.6.15.1	SA event triggered reporting tests For FR2 with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements	3075
A.7.6.15.1.1	Test Purpose and Environment	3075
A.7.6.15.1.2	Test Requirements	3078
A.7.6.15.2	SA event triggered reporting tests For FR2 with concurrent measurement gaps without SSB time index detection when DRX is not used (PCell in FR2)	3078
A.7.6.15.2.1	Test Purpose and Environment	3078
A.7.6.15.2.2	Test Requirements	3081
A.7.6.15.3	SA event triggered reporting tests for FR2 concurrent gap with partially partial overlapping scenario for SSB-based measurements and PRS-based measurement	3081
A.7.6.15.3.1	Test Purpose and Environment	3081
A.7.6.15.3.2	Test Requirements	3084
A.7.6.16	SA event triggered reporting tests with NCSG	3085
A.7.6.16.1	SA event triggered reporting test with per-UE NCSG under non-DRX	3085
A.7.6.16.1.1	Test purpose and Environment	3085
A.7.6.16.1.2	Test Requirements	3087
A.7.6.16.2	SA event triggered reporting tests on inter-frequency measurement with NCSG for FR2 when DRX is not used (PCell in FR2)	3088
A.7.6.16.2.1	Test Purpose and Environment	3088
A.7.6.16.2.2	Test Requirements	3090
A.7.6.16.3	Event triggered reporting test on deactivated Scell measurement via NCSG in FR2 in non-DRX	3091
A.7.6.16.3.1	Test Purpose and Environment	3091
A.7.6.16.3.2	Test Requirements	3093
A.7.7	Measurement Performance requirements	3093
A.7.7.1	SS-RSRP	3093
A.7.7.1.1	SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	3093
A.7.7.1.1.1	Test Purpose and Environment	3093
A.7.7.1.1.2	Test parameters	3094
A.7.7.1.1.3	Test Requirements	3096
A.7.7.1.2	SA inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	3097
A.7.7.1.2.1	Test Purpose and Environment	3097
A.7.7.1.2.2	Test parameters	3097
A.7.7.1.2.3	Test Requirements	3099
A.7.7.1.3	SA inter-frequency measurement accuracy with FR1 serving cell and FR2 target cell	3100
A.7.7.1.3.1	Test Purpose and Environment	3100
A.7.7.1.3.2	Test parameters	3100
A.7.7.1.3.3	Test Requirements	3103
A.7.7.2	SS-RSRQ	3103
A.7.7.2.1	SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell	3103
A.7.7.2.1.1	Test Purpose and Environment	3103
A.7.7.2.1.2	Test Parameters	3103
A.7.7.2.1.3	Test Requirements	3105
A.7.7.2.2	SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell	3105
A.7.7.2.2.1	Test Purpose and Environment	3105
A.7.7.2.2.2	Test Parameters	3105
A.7.7.2.2.3	Test Requirements	3107
A.7.7.3	SS-SINR	3107
A.7.7.3.1	SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	3107
A.7.7.3.1.1	Test Purpose and Environment	3107
A.7.7.3.1.2	Test Parameters	3107
A.7.7.3.1.3	Test Requirements	3109
A.7.7.3.2	SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell	3109
A.7.7.3.2.1	Test Purpose and Environment	3109
A.7.7.3.2.2	Test Parameters	3109
A.7.7.3.2.3	Test Requirements	3111
A.7.7.4	L1-RSRP measurement for beam reporting	3111

A.7.7.4.1	SSB based L1-RSRP measurement.....	3111
A.7.7.4.1.1	Test Purpose and Environment.....	3111
A.7.7.4.1.2	Test parameters.....	3111
A.7.7.4.1.3	Test Requirements.....	3113
A.7.7.4.2	CSI-RS based L1-RSRP measurement on resource set with repetition off.....	3113
A.7.7.4.2.1	Test Purpose and Environment.....	3113
A.7.7.4.2.2	Test parameters.....	3113
A.7.7.4.2.3	Test Requirements.....	3115
A.7.7.5	CLI measurements.....	3116
A.7.7.5.1	SA SRS-RSRP measurement accuracy with FR2 serving cell.....	3116
A.7.7.5.1.1	Test Purpose and Environment.....	3116
A.7.7.5.1.2	Test parameters.....	3116
A.7.7.5.1.3	Test Requirements.....	3118
A.7.7.5.2	SA CLI-RSSI measurement accuracy with FR2 serving cell.....	3118
A.7.7.5.2.1	Test Purpose and Environment.....	3118
A.7.7.5.2.2	Test parameters.....	3119
A.7.7.5.2.3	Test Requirements.....	3121
A.7.7.6	L1-SINR measurement for beam reporting.....	3121
A.7.7.6.1.1	Test Purpose and Environment.....	3121
A.7.7.6.1.2	Test parameters.....	3121
A.7.7.6.1.3	Test Requirements.....	3123
A.7.7.6.2	L1-SINR measurement with SSB based CMR and dedicated IMR.....	3124
A.7.7.6.2.1	Test Purpose and Environment.....	3124
A.7.7.6.2.2	Test parameters.....	3124
A.7.7.6.2.3	Test Requirements.....	3125
A.7.7.6.3	L1-SINR measurement with CSI-RS based CMR and dedicated IMR.....	3126
A.7.7.6.3.1	Test Purpose and Environment.....	3126
A.7.7.6.3.2	Test parameters.....	3126
A.7.7.6.3.3	Test Requirements.....	3128
A.7.7.7	CSI-RSRP.....	3129
A.7.7.7.1	SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell.....	3129
A.7.7.7.1.1	Test Purpose and Environment.....	3129
A.7.7.7.1.2	Test parameters.....	3129
A.7.7.7.1.3	Test Requirements.....	3131
A.7.7.7.2	SA inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell.....	3132
A.7.7.7.2.1	Test Purpose and Environment.....	3132
A.7.7.7.2.2	Test parameters.....	3132
A.7.7.7.2.3	Test Requirements.....	3134
A.7.7.8	CSI-RSRQ.....	3135
A.7.7.8.1	SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell.....	3135
A.7.7.8.1.1	Test Purpose and Environment.....	3135
A.7.7.8.1.2	Test Parameters.....	3135
A.7.7.8.1.3	Test Requirements.....	3137
A.7.7.8.2	SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell.....	3137
A.7.7.8.2.1	Test Purpose and Environment.....	3137
A.7.7.8.2.2	Test Parameters.....	3137
A.7.7.8.2.3	Test Requirements.....	3139
A.7.7.9	CSI-SINR.....	3139
A.7.7.9.1	SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell.....	3139
A.7.7.9.1.1	Test Purpose and Environment.....	3139
A.7.7.9.1.2	Test Parameters.....	3139
A.7.7.9.1.3	Test Requirements.....	3141
A.7.7.9.2	SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell.....	3141
A.7.7.9.2.1	Test Purpose and Environment.....	3141
A.7.7.9.2.2	Test Parameters.....	3141
A.7.7.9.2.3	Test Requirements.....	3143
A.7.7.10	RSTD measurements.....	3143
A.7.7.10.1	RSTD measurement accuracy test case for single positioning frequency layer.....	3143
A.7.7.10.1.1	Test purpose and Environment.....	3143
A.7.7.10.1.2	Test Requirements.....	3145
A.7.7.10.2	RSTD measurement accuracy test case for dual positioning frequency layer.....	3145
A.7.7.10.2.1	Test purpose and Environment.....	3145

A.7.7.10.2.2	Test Requirements	3148
A.7.7.10.3	RSTD measurement accuracy test case with reduced number of samples for single positioning frequency layer in FR2 in RRC_CONNECTED state.....	3148
A.7.7.10.3.1	Test purpose and Environment	3148
A.7.7.10.3.2	Test Requirements	3150
A.7.7.10.4	RSTD measurement accuracy test case with Rx TEG	3150
A.7.7.10.4.1	Test purpose and Environment	3150
A.7.7.10.4.2	Test Requirements	3152
A.7.7.11	PRS-RSRP measurements	3152
A.7.7.11.1	SA measurement accuracy with PRS in FR2	3152
A.7.7.11.1.1	Test Purpose and Environment.....	3152
A.7.7.11.1.2	Test parameters.....	3152
A.7.7.11.1.3	Test Requirements	3154
A.7.7.11.2	SA measurement accuracy with PRS in FR2 with reduced sample number	3154
A.7.7.11.2.1	Test Purpose and Environment.....	3154
A.7.7.11.2.2	Test parameters.....	3154
A.7.7.11.2.3	Test Requirements	3156
A.7.7.12	UE Rx-Tx time difference measurements.....	3156
A.7.7.12.1	UE Rx-Tx time difference measurement accuracy for single positioning frequency layer in FR2 SA	3156
A.7.7.12.1.1	Test purpose and environment.....	3156
A.7.7.12.1.2	Test parameters.....	3157
A.7.7.12.1.3	Test requirements	3159
A.7.7.12.2	UE Rx-Tx time difference measurement accuracy with reduced number of samples in FR2 SA.....	3159
A.7.7.12.2.1	Test purpose and environment.....	3159
A.7.7.12.2.2	Test parameters.....	3160
A.7.7.12.2.3	Test requirements	3161
A.7.7.12.3	UE Rx-Tx time difference measurement accuracy with RxTx TEG.....	3161
A.7.7.12.3.1	Test purpose and environment.....	3161
A.7.7.12.3.2	Test parameters.....	3162
A.7.7.12.3.3	Test requirements	3163
A.7.7.13	PRS-RSRPP measurements	3164
A.7.7.13.1	SA measurement accuracy with PRS in FR2	3164
A.7.7.13.1.1	Test Purpose and Environment.....	3164
A.7.7.13.1.2	Test parameters.....	3164
A.7.7.13.1.3	Test Requirements	3166
A.7.7.13.2	SA measurement accuracy with reduced PRS samples in FR2.....	3166
A.7.7.13.2.1	Test Purpose and Environment.....	3166
A.7.7.13.2.2	Test parameters.....	3166
A.7.7.13.2.3	Test Requirements	3168
A.7.8	Measurement procedure in RRC_INACTIVE.....	3168
A.7.8.1	RSTD measurements	3168
A.7.8.1.1	NR RSTD measurement reporting delay test case for single positioning frequency layer in FR2 SA in RRC_INACTIVE state	3168
A.7.8.1.1.1	Test Purpose and Environment.....	3168
A.7.8.1.1.2	Test Requirements	3171
A.7.8.1.2	NR RSTD measurement reporting delay test case with reduced number of samples in RRC_INACTIVE, FR1 SA.....	3172
A.7.8.1.2.1	Test Purpose and Environment.....	3172
A.7.8.1.2.2	Test Requirements	3175
A.7.8.2	PRS-RSRP measurements	3176
A.7.8.2.1	PRS-RSRP reporting delay test case for single positioning frequency layer in RRC_INACTIVE ..	3176
A.7.8.2.1.1	Test Purpose and Environment.....	3176
A.7.8.2.1.2	Test Requirements	3178
A.7.8.2.2	PRS-RSRP reporting delay test case with reduced number of samples in RRC_INACTIVE	3178
A.7.8.2.2.1	Test purpose and Environment.....	3178
A.7.8.2.2.2	Test Requirements	3181
A.7.8.3	UE Rx-Tx time difference measurements.....	3181
A.7.8.3.1	UE Rx-Tx time difference measurements for single positioning frequency layer in FR2 SA	3181
A.7.8.3.1.1	Test purpose and environment.....	3181
A.7.8.3.1.2	Test requirements	3183

A.7.8.3.2	UE Rx-Tx time difference measurement with reduced number of samples in RRC_INACTIVE, FR2 SA.....	3184
A.7.8.3.2.1	Test purpose and environment.....	3184
A.7.8.3.2.2	Test requirements	3186
A.7.8.4	PRS-RSRPP measurements	3186
A.7.8.4.1	PRS-RSRPP reporting delay test case for single positioning frequency layer in FR2 in RRC_INACTIVE state.....	3186
A.7.8.4.1.1	Test Purpose and Environment.....	3186
A.7.8.4.1.2	Test Requirements.....	3189
A.7.8.4.2	PRS-RSRPP reporting delay test with reduced number of samples for single positioning frequency layer in FR2 in RRC_INACTIVE state.....	3189
A.7.8.4.2.1	Test Purpose and Environment.....	3189
A.7.8.4.2.2	Test Requirements.....	3192
A.7.9	Measurement performance requirements in RRC_INACTIVE.....	3192
A.7.9.1	RSTD measurements	3192
A.7.9.1.1	RSTD measurement accuracy test case for single positioning frequency layer in FR2 in RRC_INACTIVE state.....	3192
A.7.9.1.1.1	Test purpose and Environment.....	3192
A.7.9.1.1.2	Test Requirements.....	3194
A.7.9.1.2	RSTD measurement accuracy test case with reduced number of samples for single positioning frequency layer in FR2 in RRC_INACTIVE state.....	3194
A.7.9.1.2.1	Test purpose and Environment.....	3194
A.7.9.1.2.2	Test Requirements.....	3196
A.7.9.2	PRS-RSRP measurements	3196
A.7.9.2.1	SA measurement accuracy with PRS in FR2 in RRC_INACTIVE	3196
A.7.9.2.1.1	Test Purpose and Environment.....	3196
A.7.9.2.1.2	Test parameters.....	3196
A.7.9.2.1.3	Test Requirements.....	3198
A.7.9.2.2	PRS-RSRP measurements with reduced number of sample in RRC_INACTIVE.....	3198
A.7.9.2.2.1	Test Purpose and Environment.....	3198
A.7.9.2.2.2	Test parameters.....	3199
A.7.9.2.2.3	Test Requirements.....	3200
A.7.9.3	UE Rx-Tx time difference measurements.....	3201
A.7.9.3.1	UE Rx-Tx time difference measurements in RRC_INACTIVE	3201
A.7.9.3.1.1	Test purpose and environment.....	3201
A.7.9.3.1.2	Test parameters.....	3201
A.7.9.3.1.3	Test requirements	3202
A.7.9.3.2	UE Rx-Tx time difference measurement accuracy with reduced number of samples in FR2 SA.....	3203
A.7.9.3.2.1	Test purpose and environment.....	3203
A.7.9.3.2.2	Test parameters.....	3203
A.7.9.3.2.3	Test requirements	3205
A.7.9.4	PRS-RSRPP measurements	3205
A.7.9.4.1	SA measurement accuracy in FR2 in RRC INACTIVE.....	3205
A.7.9.4.1.1	Test Purpose and Environment.....	3205
A.7.9.4.1.2	Test parameters.....	3205
A.7.9.4.1.3	Test Requirements.....	3207
A.7.9.4.2	SA measurement accuracy with reduced PRS samples in FR2 in RRC INACTIVE	3207
A.7.9.4.2.1	Test Purpose and Environment.....	3207
A.7.9.4.2.2	Test parameters.....	3207
A.7.9.4.2.3	Test Requirements.....	3209
A.8	E-UTRA standalone tests for NR RRM	3210
A.8.1	Void.....	3210
A.8.2	RRC_IDLE state mobility	3210
A.8.2.1	Inter-RAT NR Cell re-selection.....	3210
A.8.2.1.1	E-UTRA Cell reselection to higher priority NR target Cell in FR1	3210
A.8.2.1.1.1	Test Purpose and Environment.....	3210
A.8.2.1.1.2	Test Requirements	3213
A.8.2.1.2	E-UTRA Cell reselection to lower priority NR target Cell in FR1 for UE configured with highSpeedInterRAT-NR-r16.....	3214
A.8.2.1.2.1	Test Purpose and Environment.....	3214
A.8.2.1.2.2	Test Requirements.....	3217

A.8.2.2	E-UTRA – NR Inter-RAT Early Measurement Reporting	3218
A.8.2.2.1	E-UTRA – NR Early Measurement Reporting for NR in FR1	3218
A.8.2.2.1.1	Test Purpose and Environment.....	3218
A.8.2.2.1.2	Test Requirements	3221
A.8.2.2.2	E-UTRA – NR Early Measurement Reporting for NR in FR2	3221
A.8.2.2.2.1	Test Purpose and Environment.....	3221
A.8.2.2.2.2	Test Requirements	3224
A.8.3	RRC_CONNECTED state mobility	3224
A.8.3.1	Handover	3224
A.8.3.1.1	E-UTRAN - NR handover in FR1.....	3224
A.8.3.1.1.1	Test Purpose and Environment.....	3224
A.8.3.1.1.2	Test Requirements	3228
A.8.4	Measurement procedure	3228
A.8.4.1	E-UTRA – NR Inter-RAT SFTD Measurement Delay.....	3228
A.8.4.1.1	E-UTRA – NR Inter-RAT SFTD Measurement Delay in non-DRX	3228
A.8.4.1.1.1	Test Purpose and Environment.....	3228
A.8.4.1.1.2	Test Requirements	3230
A.8.4.1.2	E-UTRA – NR Inter-RAT SFTD Measurement Delay in DRX	3230
A.8.4.1.2.1	Test Purpose and Environment.....	3230
A.8.4.1.2.2	Test Requirements	3231
A.8.4.2	E-UTRA – NR Inter-RAT Measurements	3232
A.8.4.2.1	NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used	3232
A.8.4.2.1.1	Test Purpose and Environment.....	3232
A.8.4.2.1.2	Test Requirements	3235
A.8.4.2.2	NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used	3235
A.8.4.2.2.1	Test Purpose and Environment.....	3235
A.8.4.2.2.2	Test Requirements	3239
A.8.4.2.3	NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used	3239
A.8.4.2.3.1	Test Purpose and Environment.....	3239
A.8.4.2.3.2	Test Requirements	3243
A.8.4.2.4	NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used.....	3243
A.8.4.2.4.1	Test Purpose and Environment.....	3243
A.8.4.2.4.2	Test Requirements	3246
A.8.4.2.5	NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is not used	3247
A.8.4.2.5.1	Test Purpose and Environment.....	3247
A.8.4.2.5.2	Test Requirements	3248
A.8.4.2.6	NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is used	3249
A.8.4.2.6.1	Test Purpose and Environment.....	3249
A.8.4.2.6.2	Test Requirements	3251
A.8.4.2.7	NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is not used	3252
A.8.4.2.7.1	Test Purpose and Environment.....	3252
A.8.4.2.7.2	Test Requirements	3254
A.8.4.2.8	NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is used.....	3254
A.8.4.2.8.1	Test Purpose and Environment.....	3254
A.8.4.2.8.2	Test Requirements	3256
A.8.4.2.9	NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection in DRX for UE configured with highSpeedInterRAT-NR-r16	3257
A.8.4.2.9.1	Test Purpose and Environment.....	3257
A.8.4.2.9.2	Test Requirements	3260
A.8.5	Measurement performance	3261
A.8.5.1	SFTD accuracy	3261
A.8.5.1.1	SFTD accuracy.....	3261
A.8.5.1.1.1	Test Purpose	3261
A.8.5.1.1.2	Test Environment	3261

A.8.5.1.1.3	Test Requirements	3265
A.8.5.2	E-UTRA – NR Inter-RAT Measurement Performance requirements	3265
A.8.5.2.1.1	E-UTRAN – NR inter-RAT measurements with FR1 target cell	3265
A.8.5.2.1.2	E-UTRAN – NR inter-RAT measurements with FR2 target cell	3268
A.8.5.2.1.2.1	Test Purpose and Environment	3268
A.8.5.2.1.2.2	Test Parameters	3268
A.8.5.2.1.2.3	Test Requirements	3270
A.8.5.2.2	SS-RSRQ	3270
A.8.5.2.2.1	E-UTRAN – NR inter-RAT measurements with FR1 target cell	3270
A.8.5.2.2.2	E-UTRAN – NR inter-RAT measurements with FR2 target cell	3273
A.8.5.2.2.2.1	Test Purpose and Environment	3273
A.8.5.2.2.2.2	Test Parameters	3273
A.8.5.2.2.2.3	Test Requirements	3275
A.8.5.2.3	SS-SINR	3275
A.8.5.2.3.1	E-UTRAN – NR inter-RAT measurements with FR1 target cell	3275
A.8.5.2.3.2	E-UTRAN – NR inter-RAT measurements with FR2 target cell	3278
A.8.5.2.3.2.1	Test Purpose and Environment	3278
A.8.5.2.3.2.2	Test Parameters	3278
A.8.5.2.3.2.3	Test Requirements	3279
A.9	V2X Tests	3280
A.9.1	V2X Tests in FR1	3280
A.9.1.1	Test for V2X UE Transmit Timing	3280
A.9.1.1.1	Test for GNSS as Synchronization Reference Source	3280
A.9.1.1.1.1	Test Purpose and Environment	3280
A.9.1.1.1.2	Test requirements	3280
A.9.1.1.2	Test for SyncRef UE as Synchronization Reference Source	3280
A.9.1.1.2.1	Test Purpose and Environment	3280
A.9.1.1.2.2	Test requirements	3281
A.9.1.1.3	Test for FR1 NR Cell as Synchronization Reference Source	3281
A.9.1.1.3.1	Test Purpose and Environment	3281
A.9.1.1.3.2	Test requirements	3283
A.9.1.2	Test for Initiation/Cease of S-SSB Transmission with V2X Sidelink Communication	3283
A.9.1.2.1	Test for FR1 NR Cell as synchronization reference source without gap under non-DRX	3283
A.9.1.2.1.1	Test Purpose and Environment	3283
A.9.1.2.1.2	Test Requirements	3285
A.9.1.2.2	Test for SyncRef UE as synchronization reference source	3286
A.9.1.2.2.1	Test Purpose and Environment	3286
A.9.1.2.2.2	Test Requirements	3287
A.9.1.2.3	Test for SyncRef UE as synchronization reference source when SL-DRX is used	3288
A.9.1.2.3.1	Test Purpose and Environment	3288
A.9.1.2.3.2	Test Requirements	3289
A.9.1.3	Test for V2X Synchronization Reference Selection/Reselection	3290
A.9.1.3.1	Test for GNSS configured as the highest priority	3290
A.9.1.3.1.1	Test Purpose and Environment	3290
A.9.1.3.1.2	Test Requirements	3291
A.9.1.3.2	Test for FR1 NR Cell configured as the highest priority	3292
A.9.1.3.2.1	Test Purpose and Environment	3292
A.9.1.3.2.2	Test Requirements	3294
A.9.1.3.3	Test for GNSS configured as the highest priority under SL-DRX	3295
A.9.1.3.3.1	Test Purpose and Environment	3295
A.9.1.3.3.2	Test Requirements	3297
A.9.1.3.4	Test for FR1 NR Cell configured as the highest priority under SL-DRX	3298
A.9.1.3.4.1	Test Purpose and Environment	3298
A.9.1.3.4.2	Test Requirements	3299
A.9.1.4	Test for L1 SL-RSRP Measurement	3300
A.9.1.4.1	Test for V2X UE Autonomous Resource Selection/Reselection	3300
A.9.1.4.1.1	Test Purpose and Environment	3300
A.9.1.4.1.2	Test Requirements	3303
A.9.1.4.2	Test for V2X UE Resource Pre-emption	3303
A.9.1.4.2.1	Test Purpose and Environment	3303
A.9.1.4.2.2	Test Requirements	3305

A.9.1.4.3	Test for V2X UE Resource Re-evaluation	3305
A.9.1.4.3.1	Test Purpose and Environment.....	3305
A.9.1.4.3.2	Test Requirements	3309
A.9.1.4.4	Test for V2X UE Autonomous Resource Selection/Reselection with Periodic Sensing.....	3309
A.9.1.4.4.1	Test Purpose and Environment.....	3309
A.9.1.4.4.2	Test Requirements	3311
A.9.1.4.5	Test for V2X UE Autonomous Resource Selection/Reselection with Contiguous Sensing.....	3311
A.9.1.4.5.1	Test Purpose and Environment.....	3311
A.9.1.4.5.2	Test Requirements	3314
A.9.1.4.6	Test for V2X UE Autonomous Resource Selection/Reselection in SL-DRX	3314
A.9.1.4.6.1	Test Purpose and Environment.....	3314
A.9.1.4.6.2	Test Requirements	3316
A.9.1.5	Test for Congestion Control Measurement.....	3317
A.9.1.5.1	Test Purpose and Environment	3317
A.9.1.5.2	Test Requirements.....	3320
A.9.1.6	Test for Interruption.....	3320
A.9.1.6.1	Test for Interruption to WAN due to V2X Sidelink Communication	3320
A.9.1.6.1.1	Test Purpose and Environment.....	3320
A.9.1.6.1.2	Test Requirements	3323
A.9.1.6.2	Test for interruption to WAN at transitions between active and non-active during SL-DRX in asynchronous case	3323
A.9.1.6.2.1	Test Purpose and Environment.....	3323
A.9.1.6.2.2	Test Requirements	3325
A.9.1.6.3	Test for Interruption at NR Sidelink Discovery Configuration.....	3325
A.9.1.6.3.1	Test Purpose and Environment.....	3325
A.9.1.6.3.2	Test Requirements	3328
A.9.1.7	Selection / Reselection of relay UE	3328
A.9.1.7.1	Test Purpose and Environment	3328
A.9.1.7.2	Test Requirements.....	3332
A.10	EN-DC Tests with NR PSCell under CCA and Other NR Cells in FR1.....	3333
A.10.1	RRC_CONNECTED state mobility	3333
A.10.1.1	RRC connection mobility control	3333
A.10.1.1.1	Random Access.....	3333
A.10.1.1.1.1	4-step RA type contention-based random access for NR PSCell with CCA	3333
A.10.1.1.1.1.1	Test Purpose and Environment	3333
A.10.1.1.1.1.2	Test Requirements	3335
A.10.1.1.1.1.2.1	Random Access Preamble Transmission.....	3335
A.10.1.1.1.1.2.2	Random Access Response Reception.....	3335
A.10.1.1.1.1.2.3	No Random Access Response Reception.....	3336
A.10.1.1.1.1.2.4	Receiving an UL grant for msg3 retransmission	3336
A.10.1.1.1.1.2.5	Contention Resolution Timer expiry.....	3336
A.10.1.1.1.2	4-step RA type non-contention based random access for NR PSCell with CCA	3336
A.10.1.1.1.2.1	Test Purpose and Environment	3336
A.10.1.1.1.2.2	Test Requirements	3338
A.10.1.1.1.2.2.1	SSB-based Random Access Preamble Transmission	3338
A.10.1.1.1.2.2.2	Random Access Response Reception.....	3339
A.10.1.1.1.2.2.3	No Random Access Response Reception.....	3339
A.10.1.1.1.3	2-step RA type contention-based random access for NR PSCell with CCA	3340
A.10.1.1.1.3.1	Test Purpose and Environment	3340
A.10.1.1.1.3.2	Test Requirements	3341
A.10.1.1.1.3.2.1	MsgA Transmission	3341
A.10.1.1.1.3.2.2	MsgB Reception.....	3342
A.10.1.1.1.3.2.3	No MsgB Reception	3342
A.10.1.1.1.4	2-step RA type non-contention based random access for NR PSCell with CCA	3343
A.10.1.1.1.4.1	Test Purpose and Environment	3343
A.10.1.1.1.4.2	Test Requirements	3345
A.10.1.1.1.4.2.1	MsgA Transmission	3345
A.10.1.1.1.4.2.2	MsgB Reception.....	3345
A.10.1.1.1.4.2.3	No MsgB Reception.....	3346
A.10.1.2	Handover with PSCell from EN-DC to EN-DC with known target PSCell using CCA	3346
A.10.1.2.1	Test Purpose and Environment.....	3346

A.10.1.2.2	Test Requirements	3351
A.10.2	Timing	3352
A.10.2.1	UE transmit timing	3352
A.10.2.1.1	UE Transmit Timing Test with PSCell under DL CCA	3352
A.10.2.1.1.1	Test Purpose and environment	3352
A.10.2.1.1.2	Test requirements	3354
A.10.2.2	UE timing advance	3354
A.10.2.2.1	UE Timing Advance Adjustment Accuracy with PSCell under DL CCA	3354
A.10.2.2.1.1	Test Purpose and Environment	3354
A.10.2.2.1.2	Test Parameters	3354
A.10.2.2.1.3	Test Requirements	3357
A.10.3	Signalling characteristics	3357
A.10.3.1	Radio link monitoring	3357
A.10.3.1.1	Introduction	3357
A.10.3.1.2	Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	3358
A.10.3.1.2.1	Test purpose and environment	3358
A.10.3.1.2.2	Test requirements	3361
A.10.3.1.3	Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode	3361
A.10.3.1.3.1	Test purpose and environment	3361
A.10.3.1.3.2	Test requirements	3365
A.10.3.1.4	Void	3365
A.10.3.1.4.1	Void	3365
A.10.3.1.4.2	Void	3365
A.10.3.1.5	Void	3365
A.10.3.1.5.1	Void	3365
A.10.3.1.5.2	Void	3365
A.10.3.2	Void	3365
A.10.3.3	SCell activation and deactivation delay	3365
A.10.3.3.1	SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 160 ms SCell measurement cycle	3365
A.10.3.3.1.1	Test Purpose and Environment	3365
A.10.3.3.1.2	Test Requirements	3368
A.10.3.3.2	SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 640 ms SCell measurement cycle	3369
A.10.3.3.2.1	Test Purpose and Environment	3369
A.10.3.3.2.2	Test Requirements	3369
A.10.3.3.3	SCell Activation and Deactivation of unknown NR SCell with NR PSCell and NR SCell under CCA	3370
A.10.3.3.3.1	Test Purpose and Environment	3370
A.10.3.3.3.2	Test Requirements	3370
A.10.3.4	Beam failure detection and link recovery procedures	3371
A.10.3.4.1	EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in non-DRX mode	3371
A.10.3.4.1.1	Test Purpose and Environment	3371
A.10.3.4.1.2	Test Requirements	3374
A.10.3.4.2	EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in DRX mode	3375
A.10.3.4.2.1	Test Purpose and Environment	3375
A.10.3.4.2.2	Test Requirements	3378
A.10.3.5	Active BWP switching	3379
A.10.3.5.1	UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC	3379
A.10.3.5.1.2	Test Requirements	3382
A.10.3.5.2	DCI-based and Timer-based Active BWP Switch	3382
A.10.3.5.2.1	E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC	3382
A.10.3.5.2.2	E-UTRAN – NR PSCell FR1 DL active BWP switch with FR1 SCell in non-DRX in synchronous EN-DC	3386
A.10.3.5.3	RRC-based Active BWP Switch	3389
A.10.3.5.3.1	E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC	3389
A.10.3.6	PSCell addition and release delay	3392

A.10.3.6.1	Addition and Release Delay of known NR PSCell on the carrier under CCA.....	3392
A.10.3.6.1.1	Test purpose and environment.....	3392
A.10.3.6.1.2	Test Requirements.....	3395
A.10.3.7	Void.....	3396
A.10.4	Measurement procedure	3396
A.10.4.1	Intra-frequency measurements.....	3396
A.10.4.1.1	Event-triggered reporting tests on PSCC without gaps under non-DRX	3396
A.10.4.1.1.1	Test purpose and environment.....	3396
A.10.4.1.1.2	Test parameters.....	3396
A.10.4.1.1.3	Test Requirements.....	3399
A.10.4.1.2	Void.....	3399
A.10.4.1.3	Void.....	3399
A.10.4.1.4	Event-triggered reporting tests on PSCC with per-UE gaps under DRX	3399
A.10.4.1.4.1	Test purpose and environment.....	3399
A.10.4.1.4.2	Test parameters.....	3399
A.10.4.1.4.3	Test Requirements.....	3402
A.10.4.1.5	Void.....	3403
A.10.4.1.6	Void.....	3403
A.10.4.1.7	Void.....	3403
A.10.4.1.8	Void.....	3403
A.10.4.1.9	Void.....	3403
A.10.4.1.10	Void.....	3403
A.10.4.1.11	Void.....	3403
A.10.4.1.12	Void.....	3403
A.10.4.2	Inter-frequency measurements.....	3403
A.10.4.2.1	Void.....	3403
A.10.4.2.2	Void.....	3403
A.10.4.2.3	EN-DC event triggered reporting tests for FR1 with CCA cell without SSB time index detection when DRX is not used.....	3403
A.10.4.2.3.1	Test Purpose and Environment.....	3403
A.10.4.2.3.2	Test Requirements.....	3406
A.10.4.2.4	EN-DC event triggered reporting tests for FR1 cell with CCA without SSB time index detection when DRX is used.....	3406
A.10.4.2.4.1	Test Purpose and Environment.....	3406
A.10.4.2.4.2	Test Requirements.....	3410
A.10.4.2.5	EN-DC event triggered reporting tests for FR1 cell with CCA with SSB time index detection when DRX is not used.....	3410
A.10.4.2.5.1	Test Purpose and Environment.....	3410
A.10.4.2.5.2	Test Requirements.....	3413
A.10.4.2.6	EN-DC event triggered reporting tests for FR1 cell with CCA with SSB time index detection when DRX is used.....	3413
A.10.4.2.6.1	Test Purpose and Environment.....	3413
A.10.4.2.6.2	Test Requirements.....	3417
A.10.4.2.7	EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is not used	3417
A.10.4.2.7.1	Test Purpose and Environment.....	3417
A.10.4.2.7.2	Test Requirements.....	3421
A.10.4.2.8	EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used.....	3421
A.10.4.2.8.1	Test Purpose and Environment.....	3421
A.10.4.2.8.2	Test Requirements.....	3425
A.10.4.2.9	EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is not used	3426
A.10.4.2.9.1	Test Purpose and Environment.....	3426
A.10.4.2.9.2	Test Requirements.....	3429
A.10.4.2.10	EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is used	3430
A.10.4.2.10.1	Test Purpose and Environment.....	3430
A.10.4.2.10.2	Test Requirements.....	3434
A.10.4.3	L1-RSRP measurements for beam reporting	3435
A.10.4.3.1	SSB based L1-RSRP measurement on PSCC when DRX is not used	3435
A.10.4.3.1.1	Test Purpose and Environment.....	3435

A.10.4.3.1.2	Test parameters.....	3435
A.10.4.3.1.3	Test Requirements.....	3437
A.10.4.3.2	SSB based L1-RSRP measurement on PSCC when DRX is used	3437
A.10.4.3.2.1	Test Purpose and Environment.....	3437
A.10.4.3.2.2	Test parameters.....	3437
A.10.4.3.2.3	Test Requirements.....	3440
A.10.4.3.3	SSB based L1-RSRP measurement on SCC when DRX is not used	3440
A.10.4.3.3.1	Test Purpose and Environment.....	3440
A.10.4.3.3.2	Test parameters.....	3440
A.10.4.3.3.3	Test Requirements.....	3442
A.10.4.3.4	SSB based L1-RSRP measurement on SCC when DRX is used	3442
A.10.4.3.4.1	Test Purpose and Environment.....	3442
A.10.4.3.4.2	Test parameters.....	3443
A.10.4.3.4.3	Test Requirements.....	3445
A.10.4.4	E-UTRAN–NR inter-RAT measurements on NR carrier frequency under CCA	3445
A.10.4.4.1	E-UTRAN-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used	3445
A.10.4.4.1.1	Test Purpose and Environment.....	3445
A.10.4.4.1.2	Test Requirements.....	3449
A.10.4.4.2	E-UTRAN-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used	3450
A.10.4.4.2.1	Test Purpose and Environment.....	3450
A.10.4.4.2.2	Test Requirements.....	3454
A.10.4.4.3	NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used	3454
A.10.4.4.3.1	Test Purpose and Environment.....	3454
A.10.4.4.3.2	Test Requirements.....	3458
A.10.4.4.4	NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used.....	3458
A.10.4.4.4.1	Test Purpose and Environment.....	3458
A.10.4.4.4.2	Test Requirements.....	3462
A.10.5	Measurement performance	3463
A.10.5.1	SS-RSRP.....	3463
A.10.5.1.1	Intra-frequency measurement accuracy on a CCA serving cell	3463
A.10.5.1.1.1	Test Purpose and Environment.....	3463
A.10.5.1.1.2	Test parameters.....	3463
A.10.5.1.1.3	Test Requirements.....	3465
A.10.5.1.2	Inter-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell.....	3465
A.10.5.1.2.1	Test Purpose and Environment.....	3465
A.10.5.1.2.2	Test parameters.....	3465
A.10.5.1.2.3	Test Requirements.....	3467
A.10.5.2	SS-RSRQ	3467
A.10.5.2.1	Intra-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell.....	3467
A.10.5.2.1.1	Test Purpose and Environment.....	3467
A.10.5.2.1.2	Test Parameters	3467
A.10.5.2.1.3	Test Requirements.....	3469
A.10.5.2.2	Inter-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell.....	3469
A.10.5.2.2.1	Test Purpose and Environment.....	3469
A.10.5.2.2.2	Test Parameters	3469
A.10.5.2.2.3	Test Requirements.....	3471
A.10.5.3	SS-SINR	3471
A.10.5.3.1	Intra-frequency measurement accuracy on PSCC.....	3471
A.10.5.3.1.1	Test Purpose and Environment.....	3471
A.10.5.3.1.2	Test Parameters	3471
A.10.5.3.1.3	Test Requirements.....	3473
A.10.5.3.2	Inter-frequency measurement accuracy on PSCC.....	3473
A.10.5.3.2.1	Test Purpose and Environment.....	3473
A.10.5.3.2.2	Test Parameters	3473
A.10.5.3.2.3	Test Requirements.....	3475
A.10.5.3.3	Intra-frequency measurement accuracy on SCC	3475
A.10.5.3.3.1	Test Purpose and Environment.....	3475
A.10.5.3.3.2	Test Parameters	3475

A.10.5.3.3.3	Test Requirements	3477
A.10.5.4	L1-RSRP measurement for beam reporting with CCA serving cell	3477
A.10.5.4.1	SSB based L1-RSRP measurement	3477
A.10.5.4.1.1	Test Purpose and Environment	3477
A.10.5.4.1.2	Test parameters	3478
A.10.5.4.1.3	Test Requirements	3479
A.10.5.5	RSSI	3479
A.10.5.5.1	RSSI measurement accuracy on PSCC with CCA	3479
A.10.5.5.1.1	Test Purpose and Environment	3479
A.10.5.5.1.2	Test parameters	3479
A.10.5.5.1.3	Test Requirements	3481
A.10.5.5.2	RSSI measurement accuracy on SCC with CCA	3481
A.10.5.5.2.1	Test Purpose and Environment	3481
A.10.5.5.2.2	Test parameters	3481
A.10.5.5.2.3	Test Requirements	3483
A.10.5.5.3	Inter-frequency RSSI measurement accuracy on a carrier with CCA	3483
A.10.5.5.3.1	Test Purpose and Environment	3483
A.10.5.5.3.2	Test parameters	3483
A.10.5.5.3.3	Test Requirements	3485
A.10.5.6	Channel occupancy	3486
A.10.5.6.1	Channel occupancy measurement accuracy on PSCC with CCA	3486
A.10.5.6.1.1	Test Purpose and Environment	3486
A.10.5.6.1.2	Test parameters	3486
A.10.5.6.1.3	Test Requirements	3487
A.10.5.6.2	Channel occupancy measurement accuracy on SCC with CCA	3487
A.10.5.6.2.1	Test Purpose and Environment	3487
A.10.5.6.2.2	Test parameters	3488
A.10.5.6.2.3	Test Requirements	3489
A.10.5.6.3	Inter-frequency channel occupancy measurement accuracy on a carrier with CCA	3490
A.10.5.6.3.1	Test Purpose and Environment	3490
A.10.5.6.3.2	Test parameters	3490
A.10.5.6.3.3	Test Requirements	3492
A.11	NR Standalone Tests with NR PCell under CCA and Other NR Cells in FR1	3493
A.11.1	RRC_IDLE state mobility	3493
A.11.1.1	Cell re-selection with both source and target NR carrier frequencies under CCA	3493
A.11.1.1.1	Cell reselection to FR1 intra-frequency NR cells when subject to CCA on the serving and target cell	3493
A.11.1.1.1.1	Test Purpose and Environment	3493
A.11.1.1.1.2	Test Parameters	3493
A.11.1.1.1.3	Test Requirements	3495
A.11.1.1.2	Cell reselection to FR1 inter-frequency NR case when subject to CCA on the serving and target cell	3496
A.11.1.1.2.1	Test Purpose and Environment	3496
A.11.1.1.2.2	Test Parameters	3496
A.11.1.1.2.3	Test Requirements	3498
A.11.1.2	Cell re-selection to NR with source NR carrier frequency under CCA	3499
A.11.1.2.1	Cell reselection to FR1 inter-frequency NR case when serving cell is subject to CCA	3499
A.11.1.2.1.1	Test Purpose and Environment	3499
A.11.1.2.1.2	Test Parameters	3499
A.11.1.2.1.3	Test Requirements	3502
A.11.1.3	Cell re-selection from NR carrier with target NR carrier frequency under CCA	3503
A.11.1.3.1	Cell reselection to FR1 inter-frequency NR case when target cell is subject to CCA	3503
A.11.1.3.1.1	Test Purpose and Environment	3503
A.11.1.3.1.2	Test Parameters	3503
A.11.1.3.1.3	Test Requirements	3506
A.11.1.4	Inter-RAT cell re-selection to E-UTRAN with source NR carrier frequency under CCA	3507
A.11.1.4.1	Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA	3507
A.11.1.4.1.1	Test Purpose and Environment	3507
A.11.1.4.1.2	Test Parameters	3507
A.11.1.4.1.3	Test Requirements	3510
A.11.1.4.2	Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA	3510

A.11.1.4.2.1	Test Purpose and Environment.....	3510
A.11.1.4.2.2	Test Requirements.....	3513
A.11.2	RRC_CONNECTED state mobility	3513
A.11.2.1	Handover	3513
A.11.2.1.1	Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; known target cell.....	3513
A.11.2.1.1.1	Test Purpose and Environment.....	3513
A.11.2.1.1.2	Test Parameters	3514
A.11.2.1.1.3	Test Requirements	3516
A.11.2.1.2	Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell.....	3516
A.11.2.1.2.1	Test Purpose and Environment.....	3516
A.11.2.1.2.2	Test Parameters	3517
A.11.2.1.2.3	Test Requirements	3519
A.11.2.1.3	Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell.....	3519
A.11.2.1.3.1	Test Purpose and Environment.....	3519
A.11.2.1.3.2	Test Parameters	3519
A.11.2.1.3.3	Test Requirements	3522
A.11.2.1.4	Inter-frequency handover from FR1 carrier under CCA to FR1; known target cell	3522
A.11.2.1.4.1	Test Purpose and Environment.....	3522
A.11.2.1.4.2	Test Parameters	3522
A.11.2.1.4.3	Test Requirements	3525
A.11.2.1.5	Inter-frequency handover from FR1 carrier under CCA to FR1; unknown target cell	3525
A.11.2.1.5.1	Test Purpose and Environment.....	3525
A.11.2.1.5.2	Test Parameters	3525
A.11.2.1.5.3	Test Requirements	3528
A.11.2.1.6	Inter-frequency handover from FR1 to FR1 carrier under CCA; unknown target cell	3528
A.11.2.1.6.1	Test Purpose and Environment.....	3528
A.11.2.1.6.2	Test Parameters	3528
A.11.2.1.6.3	Test Requirements	3531
A.11.2.1.7	SA NR FR1 carrier under CCA - E-UTRAN handover with known target cell	3532
A.11.2.1.7.1	Test Purpose and Environment.....	3532
A.11.2.1.7.2	Test Requirements	3535
A.11.2.1.8	SA NR FR1 carrier under CCA - E-UTRAN handover with unknown target cell.....	3536
A.11.2.1.8.1	Test Purpose and Environment.....	3536
A.11.2.1.8.2	Test Requirements	3539
A.11.2.1.9	Handover with PSCell from NR SA to EN-DC with known target PSCell using CCA.....	3539
A.11.2.1.9.1	Test Purpose and Environment.....	3539
A.11.2.1.9.2	Test Requirements	3546
A.11.2.2	RRC connection mobility control	3547
A.11.2.2.1	RRC re-establishment	3547
A.11.2.2.1.1	Intra-frequency RRC Re-establishment with CCA in FR1.....	3547
A.11.2.2.1.2	Inter-frequency RRC Re-establishment with CCA in FR1.....	3550
A.11.2.2.1.4	Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA.....	3556
A.11.2.2.2	Random Access.....	3559
A.11.2.2.2.1	4-step RA type contention-based random access for NR PCell with CCA	3559
A.11.2.2.2.1.1	Test Purpose and Environment	3559
A.11.2.2.2.1.2	Test Requirements	3561
A.11.2.2.2.1.2.1	Random Access Preamble Transmission.....	3561
A.11.2.2.2.1.2.2	Random Access Response Reception.....	3562
A.11.2.2.2.1.2.3	No Random Access Response Reception.....	3562
A.11.2.2.2.1.2.4	Receiving an UL grant for msg3 retransmission	3562
A.11.2.2.2.1.2.5	Reception of an Incorrect Message over Temporary C-RNTI	3562
A.11.2.2.2.1.2.6	Reception of a Correct Message over Temporary C-RNTI.....	3563
A.11.2.2.2.1.2.7	Contention Resolution Timer expiry	3563
A.11.2.2.2.2	4-step RA type non-contention based random access for NR PSCell with CCA	3563
A.11.2.2.2.2.1	Test Purpose and Environment	3563
A.11.2.2.2.2.2	Test Requirements	3565
A.11.2.2.2.2.2.1	SSB-based Random Access Preamble Transmission	3565
A.11.2.2.2.2.2.2	Random Access Response Reception.....	3565

A.11.2.2.2.2.3	No Random Access Response Reception	3566
A.11.2.2.2.3	2-step RA type contention-based random access for NR PCell with CCA	3566
A.11.2.2.2.3.1	Test Purpose and Environment	3566
A.11.2.2.2.3.2	Test Requirements	3568
A.11.2.2.2.3.2.1	MsgA Transmission	3568
A.11.2.2.2.3.2.2	MsgB Reception	3568
A.11.2.2.2.3.2.3	No MsgB Reception	3569
A.11.2.2.2.4	2-step RA type non-contention-based random access for NR PCell with CCA	3569
A.11.2.2.2.4.1	Test Purpose and Environment	3569
A.11.2.2.2.4.2	Test Requirements	3571
A.11.2.2.2.4.2.1	MsgA Transmission	3571
A.11.2.2.2.4.2.2	MsgB Reception	3572
A.11.2.2.2.4.2.3	No MsgB Reception	3573
A.11.2.2.3	RRC connection release with redirection	3573
A.11.2.2.3.1	Redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA	3573
A.11.2.2.3.2	Redirection from NR FR1 carrier without CCA to NR FR1 carrier with CCA	3576
A.11.3	Timing	3579
A.11.3.1	UE transmit timing	3579
A.11.3.1.1	UE Transmit Timing Test with PCell under DL CCA	3579
A.11.3.1.1.1	Test Purpose and environment	3579
A.11.3.1.1.2	Test requirements	3581
A.11.3.2	UE timing advance	3582
A.11.3.2.1	UE Timing Advance Adjustment Accuracy with PCell under DL CCA	3582
A.11.3.2.1.1	Test Purpose and Environment	3582
A.11.3.2.1.2	Test Parameters	3582
A.11.3.2.1.3	Test Requirements	3584
A.11.4	Signalling characteristics	3584
A.11.4.1	Radio link monitoring	3584
A.11.4.1.1	Introduction	3584
A.11.4.1.2	Radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode	3585
A.11.4.1.2.1	Test purpose and environment	3585
A.11.4.1.2.2	Test requirements	3588
A.11.4.1.3	Radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode	3588
A.11.4.1.3.1	Test purpose and environment	3588
A.11.4.1.3.2	Test requirements	3592
A.11.4.1.4	Void	3593
A.11.4.1.4.1	Void	3593
A.11.4.1.4.2	Void	3593
A.11.4.1.5	Void	3593
A.11.4.1.5.1	Void	3593
A.11.4.1.5.2	Void	3593
A.11.4.2	Void	3593
A.11.4.3	SCell activation and deactivation delay	3593
A.11.4.3.1	SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle	3593
A.11.4.3.1.1	Test Purpose and Environment	3593
A.11.4.3.1.2	Test Requirements	3596
A.11.4.3.2	SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 640 ms SCell measurement cycle	3596
A.11.4.3.2.1	Test Purpose and Environment	3596
A.11.4.3.2.2	Test Requirements	3597
A.11.4.3.3	SCell Activation and Deactivation of unknown SCell with PCell and SCell under CCA	3597
A.11.4.3.3.1	Test Purpose and Environment	3597
A.11.4.3.3.2	Test Requirements	3597
A.11.4.4	Beam failure detection and link recovery procedures	3598
A.11.4.4.1	Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode	3598
A.11.4.4.1.1	Test Purpose and Environment	3598
A.11.4.4.1.2	Test Requirements	3602

A.11.4.4.2	Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode	3602
A.11.4.4.2.1	Test Purpose and Environment.....	3602
A.11.4.4.2.2	Test Requirements	3605
A.11.4.5	Active BWP switching.....	3606
A.11.4.5.1	UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA.....	3606
A.11.4.5.1.1	Test Purpose and Environment.....	3606
A.11.4.5.1.2	Test Requirements	3609
A.11.4.5.2	DCI-based and Timer-based Active BWP Switch	3609
A.11.4.5.2.1	NR FR1- NR FR1 DL active BWP switch of PCell with non-DRX in SA	3609
A.11.4.5.2.2	NR FR1 DL active BWP switch with non-DRX in SA	3612
A.11.4.5.3	RRC-based Active BWP Switch	3615
A.11.4.5.3.1	NR FR1 DL active BWP switch of Cell with non-DRX in SA	3615
A.11.4.6	Void	3617
A.11.5	Measurement procedure	3618
A.11.5.1	Intra-frequency measurements.....	3618
A.11.5.1.1	Event-triggered reporting tests on PCC without gaps under non-DRX	3618
A.11.5.1.1.1	Test purpose and environment.....	3618
A.11.5.1.1.2	Test parameters.....	3618
A.11.5.1.1.3	Test Requirements	3620
A.11.5.1.2	Event-triggered reporting tests on PCC without gaps under DRX.....	3620
A.11.5.1.2.1	Test purpose and environment.....	3620
A.11.5.1.2.2	Test parameters.....	3620
A.11.5.1.2.3	Test Requirements	3623
A.11.5.1.3	Void.....	3624
A.11.5.1.4	Void.....	3624
A.11.5.1.5	Void.....	3624
A.11.5.1.6	Void.....	3624
A.11.5.1.7	Void.....	3624
A.11.5.1.8	Void.....	3624
A.11.5.1.9	Void.....	3624
A.11.5.1.10	Void.....	3624
A.11.5.1.11	Void.....	3624
A.11.5.1.12	Void.....	3624
A.11.5.2	Inter-frequency measurements.....	3624
A.11.5.2.1	Void.....	3624
A.11.5.2.2	Void.....	3624
A.11.5.2.3	Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is not used	3624
A.11.5.2.3.1	Test Purpose and Environment.....	3624
A.11.5.2.3.2	Test Requirements	3627
A.11.5.2.4	Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is used.....	3627
A.11.5.2.4.1	Test Purpose and Environment.....	3627
A.11.5.2.4.2	Test Requirements	3630
A.11.5.2.5	Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is not used	3631
A.11.5.2.5.1	Test Purpose and Environment.....	3631
A.11.5.2.5.2	Test Requirements	3634
A.11.5.2.6	Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is used	3634
A.11.5.2.6.1	Test Purpose and Environment.....	3634
A.11.5.2.6.2	Test Requirements	3638
A.11.5.2.7	Event triggered reporting tests for FR1 without SSB time index detection when DRX is not used	3638
A.11.5.2.7.1	Test Purpose and Environment.....	3638
A.11.5.2.7.2	Test Requirements	3641
A.11.5.2.8	Event triggered reporting tests for FR1 without SSB time index detection when DRX is used	3642
A.11.5.2.8.1	Test Purpose and Environment.....	3642
A.11.5.2.8.2	Test Requirements	3645
A.11.5.2.9	Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used	3646
A.11.5.2.9.1	Test Purpose and Environment.....	3646
A.11.5.2.9.2	Test Requirements	3649

A.11.5.2.10	Event triggered reporting tests for FR1 with SSB time index detection when DRX is used.....	3649
A.11.5.2.10.1	Test Purpose and Environment.....	3649
A.11.5.2.10.2	Test Requirements.....	3653
A.11.5.3	Inter-RAT E-UTRAN measurements	3653
A.11.5.3.1	SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1	3653
A.11.5.3.1.1	Test Purpose and Environment.....	3653
A.11.5.3.1.2	Test Requirements.....	3657
A.11.5.3.2	SA NR - E-UTRAN event-triggered reporting in DRX in FR1	3657
A.11.5.3.2.1	Test Purpose and Environment.....	3657
A.11.5.3.2.2	Test Requirements.....	3660
A.11.5.4	L1-RSRP measurements for beam reporting	3660
A.11.5.4.1	SSB based L1-RSRP measurement when DRX is not used.....	3660
A.11.5.4.1.1	Test Purpose and Environment.....	3660
A.11.5.4.1.2	Test parameters.....	3661
A.11.5.4.1.3	Test Requirements.....	3663
A.11.5.4.2	SSB based L1-RSRP measurement when DRX is used	3663
A.11.5.4.2.1	Test Purpose and Environment.....	3663
A.11.5.4.2.2	Test parameters.....	3663
A.11.5.4.2.3	Test Requirements.....	3665
A.11.5.4.3	SSB based L1-RSRP measurement on SCC when DRX is not used	3665
A.11.5.4.3.1	Test Purpose and Environment.....	3665
A.11.5.4.3.2	Test parameters.....	3666
A.11.5.4.3.3	Test Requirements.....	3668
A.11.5.4.4	SSB based L1-RSRP measurement on SCC when DRX is used	3668
A.11.5.4.4.1	Test Purpose and Environment.....	3668
A.11.5.4.4.2	Test parameters.....	3668
A.11.5.4.4.3	Test Requirements.....	3670
A.11.6	Measurement performance	3671
A.11.6.1	SS-RSRP.....	3671
A.11.6.1.1	Intra-frequency measurement accuracy on a carrier frequency with CCA	3671
A.11.6.1.1.1	Test Purpose and Environment.....	3671
A.11.6.1.1.2	Test parameters.....	3671
A.11.6.1.1.3	Test Requirements.....	3672
A.11.6.1.2	Intra-frequency measurement accuracy on SCC on a carrier frequency with CCA	3673
A.11.6.1.2.1	Test Purpose and Environment.....	3673
A.11.6.1.2.2	Test parameters.....	3673
A.11.6.1.2.3	Test Requirements.....	3674
A.11.6.2	SS-RSRQ.....	3675
A.11.6.2.1	Intra-frequency measurement accuracy.....	3675
A.11.6.2.1.1	Test Purpose and Environment.....	3675
A.11.6.2.1.2	Test Parameters	3675
A.11.6.2.1.3	Test Requirements.....	3676
A.11.6.2.2	Inter-frequency measurement accuracy.....	3677
A.11.6.2.2.1	Test Purpose and Environment.....	3677
A.11.6.2.2.2	Test Parameters	3677
A.11.6.2.2.3	Test Requirements.....	3678
A.11.6.2.3	Intra-frequency measurement accuracy on SCC	3678
A.11.6.2.3.1	Test Purpose and Environment.....	3678
A.11.6.2.3.2	Test Parameters	3679
A.11.6.2.3.3	Test Requirements.....	3680
A.11.6.2.4	Inter-frequency measurement accuracy.....	3680
A.11.6.2.4.1	Test Purpose and Environment.....	3680
A.11.6.2.4.2	Test Parameters	3681
A.11.6.2.4.3	Test Requirements.....	3686
A.11.6.3	SS-SINR	3686
A.11.6.3.1	Intra-frequency measurement accuracy.....	3686
A.11.6.3.1.1	Test Purpose and Environment.....	3686
A.11.6.3.1.2	Test Parameters	3686
A.11.6.3.1.3	Test Requirements.....	3688
A.11.6.3.2	Inter-frequency measurement accuracy.....	3688
A.11.6.3.2.1	Test Purpose and Environment.....	3688
A.11.6.3.2.2	Test Parameters	3688

A.11.6.3.2.3	Test Requirements	3690
A.11.6.3.3	Intra-frequency measurement accuracy on SCC	3690
A.11.6.3.3.1	Test Purpose and Environment.....	3690
A.11.6.3.3.2	Test Parameters	3690
A.11.6.3.3.3	Test Requirements	3692
A.11.6.3.4	Inter-frequency measurement accuracy.....	3692
A.11.6.3.4.1	Test Purpose and Environment.....	3692
A.11.6.3.4.2	Test Parameters	3692
A.11.6.3.4.3	Test Requirements	3696
A.11.6.4	L1-RSRP measurement for beam reporting with CCA serving cell	3697
A.11.6.4.1	SSB based L1-RSRP measurement.....	3697
A.11.6.4.1.1	Test Purpose and Environment.....	3697
A.11.6.4.1.2	Test parameters.....	3697
A.11.6.4.1.3	Test Requirements	3698
A.11.6.5	RSSI.....	3698
A.11.6.5.1	Intra-frequency RSSI measurement accuracy on PCC with CCA.....	3698
A.11.6.5.1.1	Test Purpose and Environment.....	3698
A.11.6.5.1.2	Test parameters.....	3699
A.11.6.5.1.3	Test Requirements	3700
A.11.6.5.2	Intra-frequency RSSI measurement accuracy on SCC with CCA.....	3700
A.11.6.5.2.1	Test Purpose and Environment.....	3700
A.11.6.5.2.2	Test parameters.....	3700
A.11.6.5.2.3	Test Requirements	3702
A.11.6.5.3	Inter-frequency RSSI measurement accuracy on a carrier with CCA	3702
A.11.6.5.3.1	Test Purpose and Environment.....	3702
A.11.6.5.3.2	Test parameters.....	3702
A.11.6.5.3.3	Test Requirements	3704
A.11.6.6	Channel occupancy	3704
A.11.6.6.1	Intra-frequency channel occupancy measurement accuracy on PCC with CCA.....	3704
A.11.6.6.1.1	Test Purpose and Environment.....	3704
A.11.6.6.1.2	Test parameters.....	3705
A.11.6.6.1.3	Test Requirements	3706
A.11.6.6.2	Intra-frequency channel occupancy measurement accuracy on SCC with CCA.....	3706
A.11.6.6.2.1	Test Purpose and Environment.....	3706
A.11.6.6.2.2	Test parameters.....	3706
A.11.6.6.2.3	Test Requirements	3708
A.11.6.6.3	Inter-frequency channel occupancy measurement accuracy on a carrier with CCA	3708
A.11.6.6.3.1	Test Purpose and Environment.....	3708
A.11.6.6.3.2	Test parameters.....	3708
A.11.6.6.3.3	Test Requirements	3710
A.11.6.7	E-UTRAN RSRP	3711
A.11.6.8	E-UTRAN RSRQ	3711
A.11.6.9	E-UTRAN SINR.....	3711
A.12	E-UTRA Standalone Tests with at Least One NR Cell under CCA	3711
A.12.1	RRC_IDLE state mobility	3711
A.12.1.1	Inter-RAT cell re-selection to NR on a carrier frequency with CCA	3711
A.12.1.1.1	E-UTRA Cell reselection to higher priority NR target Cell in FR1 when target cell is subject to CCA	3711
A.12.1.1.1.1	Test Purpose and Environment.....	3711
A.12.1.1.1.2	Test Requirements	3714
A.12.2	RRC_CONNECTED state mobility	3715
A.12.2.1	Handover	3715
A.12.2.1.1	E-UTRAN - NR with CCA handover	3715
A.12.2.1.1.1	Test Purpose and Environment.....	3715
A.12.2.1.1.2	Test Requirements	3719
A.12.3	Void.....	3719
A.12.4	Measurement procedure	3719
A.12.4.1	E-UTRAN–NR inter-RAT SFTD measurements	3719
A.12.4.1.1	E-UTRA – NR Inter-RAT SFTD Measurement Delay with NR under CCA in non-DRX	3719
A.12.4.1.1.1	Test Purpose and Environment.....	3719
A.12.4.1.1.2	Test Requirements	3721

A.12.4.2	E-UTRAN–NR inter-RAT measurements on NR carrier frequency under CCA	3722
A.12.4.2.1	E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used	3722
A.12.4.2.1.1	Test Purpose and Environment.....	3722
A.12.4.2.1.2	Test Requirements	3725
A.12.4.2.2	E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used	3726
A.12.4.2.2.1	Test Purpose and Environment.....	3726
A.12.4.2.2.2	Test Requirements	3729
A.12.4.2.3	NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used	3730
A.12.4.2.3.1	Test Purpose and Environment.....	3730
A.12.4.2.3.2	Test Requirements	3733
A.12.4.2.4	NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used.....	3733
A.12.4.2.4.1	Test Purpose and Environment.....	3733
A.12.4.2.4.2	Test Requirements	3737
A.12.4.2.5	Void.....	3737
A.12.4.2.6	Void.....	3737
A.12.5	Measurement performance	3738
A.12.5.1	E-UTRAN–NR SFTD	3738
A.12.5.1.1	Inter-RAT SFTD accuracy with NR target cell under CCA	3738
A.12.5.1.1.1	Test Purpose	3738
A.12.5.1.1.2	Test Environment	3738
A.12.5.1.1.3	Test Requirements	3741
A.12.5.2	Void	3741
A.12.5.3	Void	3741
A.12.5.4	Void	3741
A.12.5.5	Void	3741
A.12.5.6	Void	3741
A.13	NR Standalone Tests with NR SCell under CCA and All Other NR Cells in FR1.....	3742
A.13.1	Void.....	3742
A.13.2	Signalling characteristics.....	3742
A.13.2.1	Void	3742
A.13.2.2	SCell activation and deactivation delay	3742
A.13.2.2.1	SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle	3742
A.13.2.2.1.1	Test Purpose and Environment.....	3742
A.13.2.2.1.2	Test Requirements	3745
A.13.2.2.2	SCell Activation and Deactivation of known SCell under CCA, 640 ms SCell measurement cycle	3746
A.13.2.2.2.1	Test Purpose and Environment.....	3746
A.13.2.2.2.2	Test Requirements	3746
A.13.2.2.3	SCell Activation and Deactivation of unknown SCell under CCA.....	3747
A.13.2.2.3.1	Test Purpose and Environment.....	3747
A.13.2.2.3.2	Test Requirements	3747
A.13.2.3	Void	3748
A.13.3	Measurement procedure	3748
A.13.3.1	Intra-frequency measurements.....	3748
A.13.3.1.1	Event-triggered reporting tests on SCC without gaps under non-DRX	3748
A.13.3.1.1.1	Test purpose and environment.....	3748
A.13.3.1.1.2	Test parameters.....	3748
A.13.3.1.1.3	Test Requirements	3751
A.13.3.1.2	Event-triggered reporting tests on SCC without gaps under DRX.....	3752
A.13.3.1.2.1	Test purpose and environment.....	3752
A.13.3.1.2.2	Test parameters.....	3752
A.13.3.1.2.3	Test Requirements	3755
A.13.3.1.3	Event-triggered reporting tests on SCC with per-UE gaps under non-DRX	3756
A.13.3.1.3.1	Test purpose and environment.....	3756
A.13.3.1.3.2	Test parameters.....	3756
A.13.3.1.3.3	Test Requirements	3759
A.13.3.1.4	Event-triggered reporting tests on SCC with per-UE gaps under DRX	3760
A.13.3.1.4.1	Test purpose and environment.....	3760

A.13.3.1.4.2	Test parameters.....	3760
A.13.3.1.4.3	Test Requirements.....	3763
A.13.3.1.5	Void.....	3764
A.13.3.1.6	Void.....	3764
A.13.3.2	Inter-frequency measurements.....	3764
A.13.3.2.1	Void.....	3764
A.13.3.2.2	Void.....	3764
A.13.3.2.3	Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is not used	3764
A.13.3.2.3.1	Test Purpose and Environment.....	3764
A.13.3.2.3.2	Test Requirements.....	3767
A.13.3.2.4	Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is used.....	3768
A.13.3.2.4.1	Test Purpose and Environment.....	3768
A.13.3.2.4.2	Test Requirements.....	3772
A.13.3.2.5	Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is not used	3772
A.13.3.2.5.1	Test Purpose and Environment.....	3772
A.13.3.2.5.2	Test Requirements.....	3776
A.13.3.2.6	Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is used	3776
A.13.3.2.6.1	Test Purpose and Environment.....	3776
A.13.3.2.6.2	Test Requirements.....	3780
A.13.3.3	L1-RSRP measurements for beam reporting	3781
A.13.3.3.1	SSB based L1-RSRP measurement when DRX is not used.....	3781
A.13.3.3.1.1	Test Purpose and Environment.....	3781
A.13.3.3.1.2	Test parameters.....	3781
A.13.3.3.1.3	Test Requirements.....	3783
A.13.3.3.2	SSB based L1-RSRP measurement when DRX is used	3784
A.13.3.3.2.1	Test Purpose and Environment.....	3784
A.13.3.3.2.2	Test parameters.....	3784
A.13.3.3.2.3	Test Requirements.....	3786
A.13.4	Measurement performance	3787
A.13.4.1	SS-RSRP.....	3787
A.13.4.1.1	Intra-frequency measurement accuracy on a carrier frequency with CCA	3787
A.13.4.1.1.1	Test Purpose and Environment.....	3787
A.13.4.1.1.2	Test parameters.....	3787
A.13.4.1.1.3	Test Requirements.....	3789
A.13.4.2	SS-RSRQ.....	3789
A.13.4.2.1	Intra-frequency measurement accuracy on SCC	3789
A.13.4.2.1.1	Test Purpose and Environment.....	3789
A.13.4.2.1.2	Test Parameters	3789
A.13.4.2.1.3	Test Requirements.....	3794
A.13.4.3	SS-SINR	3794
A.13.4.3.1	Intra-frequency measurement accuracy on SCC	3794
A.13.4.3.1.1	Test Purpose and Environment.....	3794
A.13.4.3.1.2	Test Parameters	3794
A.13.4.3.1.3	Test Requirements.....	3799
A.13.4.4	L1-RSRP measurement for beam reporting with CCA serving cell	3799
A.13.4.4.1	SSB based L1-RSRP measurement.....	3799
A.13.4.4.1.1	Test Purpose and Environment.....	3799
A.13.4.4.1.2	Test parameters.....	3799
A.13.4.4.1.3	Test Requirements.....	3802
A.13.4.5	RSSI.....	3802
A.13.4.5.1	Intra-frequency RSSI measurement accuracy on a carrier with CCA.....	3802
A.13.4.5.1.1	Test Purpose and Environment.....	3802
A.13.4.5.1.2	Test parameters.....	3802
A.13.4.5.1.3	Test Requirements.....	3804
A.13.4.5.2	Inter-frequency RSSI measurement accuracy on a carrier with CCA	3805
A.13.4.5.2.1	Test Purpose and Environment.....	3805
A.13.4.5.2.2	Test parameters.....	3805
A.13.4.5.2.3	Test Requirements.....	3807

A.13.4.6	Channel occupancy	3807
A.13.4.6.1	Intra-frequency channel occupancy measurement accuracy on SCC with CCA.....	3807
A.13.4.6.1.1	Test Purpose and Environment.....	3807
A.13.4.6.1.2	Test parameters.....	3807
A.13.4.6.1.3	Test Requirements.....	3809
A.13.4.6.2	Inter-frequency channel occupancy measurement accuracy on a carrier with CCA	3809
A.13.4.6.2.1	Test Purpose and Environment.....	3809
A.13.4.6.2.2	Test parameters.....	3809
A.13.4.6.2.3	Test Requirements.....	3811
A.14	NR standalone tests for Satellite access	3811
A.14.1	RRC_IDLE state mobility	3811
A.14.1.1	Cell reselection to FR1 intra-frequency NR case	3811
A.14.1.1.1	Test Purpose and Environment.....	3811
A.14.1.1.2	Test Parameters	3811
A.14.1.1.3	Test Requirements.....	3813
A.14.1.2	Cell reselection to FR1 intra-frequency NR cell for UE configured with the feature for enhanced requirements.....	3814
A.14.1.2.1	Test Purpose and Environment.....	3814
A.14.1.2.2	Test Parameters	3814
A.14.1.2.3	Test Requirements.....	3816
A.14.1.3	Time-based measurement initiation to FR1 intra-frequency NR cell reselection	3816
A.14.1.3.1	Test Purpose and Environment.....	3816
A.14.1.3.2	Test Parameters	3817
A.14.1.3.3	Test Requirements.....	3818
A.14.1.4	Location-based cell measurement initiation to FR1 intra-frequency NR cell reselection	3819
A.14.1.4.1	Test Purpose and Environment.....	3819
A.14.1.4.2	Test Parameters	3819
A.14.1.4.3	Test Requirements.....	3820
A.14.1.5	Cell reselection to FR1 inter-frequency NR case	3821
A.14.1.5.1	Test Purpose and Environment.....	3821
A.14.1.5.2	Test Parameters	3821
A.14.1.5.3	Test Requirements.....	3823
A.14.1.6	Cell reselection to FR1 inter-frequency NR cell for UE configured with feature for enhanced requirements.....	3824
A.14.1.6.1	Test Purpose and Environment.....	3824
A.14.1.6.2	Test Parameters	3824
A.14.1.6.3	Test Requirements.....	3825
A.14.1.7	Time-based Cell measurement initiation to FR1 inter-frequency cell reselection	3826
A.14.1.7.1	Test Purpose and Environment.....	3826
A.14.1.7.2	Test Parameters	3826
A.14.1.7.3	Test Requirements.....	3828
A.14.1.8	Location-based measurement initiation to FR1 inter-frequency NR cell reselection.....	3828
A.14.1.8.1	Test Purpose and Environment.....	3828
A.14.1.8.2	Test Parameters	3828
A.14.1.8.3	Test Requirements.....	3830
A.14.1.9	Cell reselection to FR1 inter-frequency NR case for UE fulfilling low mobility relaxed measurement criterion.....	3830
A.14.1.9.1	Test Purpose and Environment.....	3830
A.14.1.9.2	Test Parameters	3830
A.14.1.9.3	Test Requirements.....	3833
A.14.1.10	Cell reselection to FR1 inter-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion.....	3833
A.14.1.10.1	Test Purpose and Environment.....	3833
A.14.1.10.2	Test Parameters	3833
A.14.1.10.3	Test Requirements.....	3835
A.14.2	RRC_CONNECTED state mobility	3836
A.14.2.1	Handover	3836
A.14.2.1.1	Intra-frequency SAN Handover from FR1 to FR1	3836
A.14.2.1.1.1	Test Purpose and Environment.....	3836
A.14.2.1.1.2	Test Parameters	3836
A.14.2.1.1.3	Test Requirements.....	3838

A.14.2.1.2	Inter-frequency SAN Handover from FR1 to FR1	3838
A.14.2.1.2.1	Test Purpose and Environment	3838
A.14.2.1.2.2	Test Parameters	3839
A.14.2.1.2.3	Test Requirements	3840
A.14.2.1.3	Intra-frequency SAN time-based conditional Handover from FR1 to FR1	3841
A.14.2.1.3.1	Test Purpose and Environment	3841
A.14.2.1.3.2	Test Parameters	3841
A.14.2.1.3.3	Test Requirements	3843
A.14.2.1.4	Inter-frequency SAN time-based conditional Handover from FR1 to FR1	3843
A.14.2.1.4.1	Test Purpose and Environment	3843
A.14.2.1.4.2	Test Parameters	3843
A.14.2.1.4.3	Test Requirements	3845
A.14.2.1.5	Intra-frequency SAN distance-based conditional Handover from FR1 to FR1	3845
A.14.2.1.5.1	Test Purpose and Environment	3845
A.14.2.1.5.2	Test Parameters	3846
A.14.2.1.5.3	Test Requirements	3848
A.14.2.1.6	Inter-frequency SAN distance-based conditional Handover from FR1 to FR1	3848
A.14.2.1.6.1	Test Purpose and Environment	3848
A.14.2.1.6.2	Test Parameters	3848
A.14.2.1.6.3	Test Requirements	3850
A.14.2.2	RRC Connection Mobility Control	3851
A.14.2.2.1	SA: RRC Re-establishment for SAN	3851
A.14.2.2.1.1	Intra-frequency RRC Re-establishment in FR1	3851
A.14.2.2.1.2	Inter-frequency RRC Re-establishment in FR1	3853
A.14.2.2.2	Random Access	3856
A.14.2.2.2.1	4-step RA type contention based random access test in FR1 for NR standalone	3856
A.14.2.2.2.1.1	Test Purpose and Environment	3856
A.14.2.2.2.1.2	Test Requirements	3857
A.14.2.2.2.2	4-step RA type non-contention based random access test in FR1 for NR standalone	3859
A.14.2.2.2.2.1	Test Purpose and Environment	3859
A.14.2.2.2.2.2	Test Requirements	3861
A.14.2.2.3	RRC Connection Release with Redirection	3862
A.14.2.2.3.1	Redirection from NR in FR1 to NR in FR1	3862
A.14.2.2.3.1.1	Test Purpose and Environment	3862
A.14.2.2.3.1.2	Test Parameters	3862
A.14.2.2.3.1.3	Test Requirements	3864
A.14.3	Timing for Satellite Access	3864
A.14.3.1	UE transmit timing for Satellite Access	3864
A.14.3.1.1	NR UE Transmit Timing Test for FR1	3864
A.14.3.1.1.1	Test Purpose and environment	3864
A.14.3.1.1.2	Test requirements	3866
A.14.3.2	Timing advance for satellite access	3867
A.14.3.2.1	SA FR1 timing advance adjustment accuracy	3867
A.14.3.2.1.1	Test Purpose and Environment	3867
A.14.3.2.1.2	Test Parameters	3867
A.14.3.2.1.3	Test Requirements	3870
A.14.4	Signalling characteristics	3870
A.14.4.1	Radio link Monitoring	3870
A.14.4.1.1	Radio Link Monitoring Out-of-sync Test for FR1 SAN PCell configured with SSB-based RLM RS in non-DRX mode	3870
A.14.4.1.1.1	Test Purpose and Environment	3870
A.14.4.1.1.2	Test Requirements	3873
A.14.4.1.2	Radio Link Monitoring In-sync Test for FR1 SAN PCell configured with SSB-based RLM RS in non-DRX mode	3873
A.14.4.1.2.1	Test Purpose and Environment	3873
A.14.4.1.2.2	Test Requirements	3876
A.14.4.1.3	Radio Link Monitoring Out-of-sync Test for FR1 SAN PCell configured with SSB-based RLM RS in DRX mode	3876
A.14.4.1.3.1	Test Purpose and Environment	3876
A.14.4.1.3.2	Test Requirements	3879
A.14.4.1.4	Radio Link Monitoring In-sync Test for FR1 SAN PCell configured with SSB-based RLM RS in DRX mode	3880

A.14.4.1.4.1	Test Purpose and Environment.....	3880
A.14.4.1.4.2	Test Requirements.....	3882
A.14.4.1.5	Radio Link Monitoring Out-of-sync Test for FR1 SAN PCell configured with CSI-RS-based RLM in non-DRX mode	3883
A.14.4.1.5.1	Test Purpose and Environment.....	3883
A.14.4.1.5.2	Test Requirements.....	3885
A.14.4.1.6	Radio Link Monitoring In-sync Test for FR1 SAN PCell configured with CSI-RS-based RLM in non-DRX mode	3886
A.14.4.1.6.1	Test Purpose and Environment.....	3886
A.14.4.1.6.2	Test Requirements.....	3888
A.14.4.1.7	Radio Link Monitoring Out-of-sync Test for FR1 SAN PCell configured with CSI-RS-based RLM in DRX mode.....	3889
A.14.4.1.7.1	Test Purpose and Environment.....	3889
A.14.4.1.7.2	Test Requirements.....	3891
A.14.4.1.8	Radio Link Monitoring In-sync Test for FR1 SAN PCell configured with CSI-RS-based RLM in DRX mode	3891
A.14.4.1.8.1	Test Purpose and Environment.....	3891
A.14.4.1.8.2	Test Requirements.....	3894
A.14.4.2	Beam Failure Detection and Link recovery procedures for satellite access.....	3895
A.14.4.2.1	Beam Failure Detection and Link Recovery Test for FR1 PCell for satellite access configured with SSB-based BFD and LR in non-DRX mode	3895
A.14.4.2.1.1	Test Purpose and Environment.....	3895
A.14.4.2.1.2	Test Requirements.....	3898
A.14.4.2.2	Beam Failure Detection and Link Recovery Test for FR1 PCell for satellite access configured with SSB-based BFD and LR in DRX mode	3899
A.14.4.2.2.1	Test Purpose and Environment.....	3899
A.14.4.2.2.2	Test Requirements.....	3902
A.14.4.2.3	Beam Failure Detection and Link Recovery Test for FR1 PCell for satellite access configured with CSI-RS-based BFD and LR in non-DRX mode.....	3903
A.14.4.2.3.1	Test Purpose and Environment.....	3903
A.14.4.2.3.2	Test Requirements.....	3906
A.14.4.2.4	Beam Failure Detection and Link Recovery Test for FR1 PCell for satellite access configured with CSI-RS-based BFD and LR in DRX mode.....	3906
A.14.4.2.4.1	Test Purpose and Environment.....	3906
A.14.4.2.4.2	Test Requirements.....	3909
A.14.4.2.5	Beam Failure Detection and Link Recovery Test for FR1 SCell for satellite access configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode	3910
A.14.4.2.5.1	Test Purpose and Environment.....	3910
A.14.4.2.5.2	Test Requirements.....	3913
A.14.4.2.6	Beam Failure Detection and Link Recovery Test for FR1 SCell for satellite access configured with CSI-RS-based BFD and SSB-based LR in DRX mode.....	3914
A.14.4.2.6.1	Test Purpose and Environment.....	3914
A.14.4.2.6.2	Test Requirements.....	3917
A.14.4.3	Active BWP switch for satellite access.....	3918
A.14.4.3.1	DCI-based and Timer-based Active BWP Switch	3918
A.14.4.3.1.1	NR FR1 DL active BWP switch with non-DRX in SA	3918
A.14.4.3.1.1.1	Test Purpose and Environment	3918
A.14.4.3.1.1.2	Test Requirements	3920
A.14.4.3.2	RRC-based Active BWP Switch	3921
A.14.4.3.2.1	NR FR1 DL active BWP switch of Cell with non-DRX in SA	3921
A.14.4.3.2.1.1	Test Purpose and Environment	3921
A.14.4.3.2.1.2	Test Requirements	3923
A.14.4.4	UE specific CBW change for satellite access	3923
A.14.4.4.1	UE specific CBW change on PCell in FR1 in non-DRX	3923
A.14.4.4.1.1	Test Purpose and Environment.....	3923
A.14.4.4.1.2	Test Requirements.....	3926
A.14.4.5	Pathloss reference signal switching delay.....	3926
A.14.4.5.1	MAC-CE based pathloss reference signal switch delay.....	3926
A.14.4.5.1.1	Test Purpose and Environment.....	3926
A.14.4.5.1.2	Test Requirements.....	3928
A.14.5	Measurement procedure	3929
A.14.5.1	Intra-frequency Measurements	3929

A.14.5.1.1	SA event triggered reporting tests without gap under non-DRX	3929
A.14.5.1.1.1	Test purpose and Environment	3929
A.14.5.1.1.2	Test parameters.....	3929
A.14.5.1.1.3	Test Requirements	3931
A.14.5.1.2	SA event triggered reporting tests without gap under DRX.....	3931
A.14.5.1.2.1	Test purpose and Environment	3931
A.14.5.1.2.2	Test parameters.....	3931
A.14.5.1.2.3	Test Requirements	3933
A.14.5.1.3	SA event triggered reporting tests without gap under non-DRX with SSB index reading.....	3933
A.14.5.1.3.1	Test purpose and Environment	3933
A.14.5.1.3.2	Test parameters.....	3933
A.14.5.1.3.3	Test Requirements	3935
A.14.5.1.4	SA event triggered reporting tests with single measurement gap under non-DRX for satellite access	3935
A.14.5.1.4.1	Test purpose and Environment	3935
A.14.5.1.4.2	Test parameters.....	3935
A.14.5.1.4.3	Test Requirements	3937
A.14.5.1.5	SA event triggered reporting tests with FNO concurrent gaps under DRX for satellite access	3937
A.14.5.1.5.1	Test purpose and Environment	3937
A.14.5.1.5.2	Test parameters.....	3937
A.14.5.1.5.3	Test Requirements	3939
A.14.5.1.6	SA event triggered reporting tests with PPO concurrent gaps under non-DRX with SSB index reading for satellite access	3940
A.14.5.1.6.1	Test purpose and Environment	3940
A.14.5.1.6.2	Test parameters.....	3940
A.14.5.1.6.3	Test Requirements	3942
A.14.5.2	Inter-frequency Measurements	3942
A.14.5.2.1	SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used with single gap for satellite access	3942
A.14.5.2.1.1	Test Purpose and Environment.....	3942
A.14.5.2.1.2	Test Requirements	3944
A.14.5.2.2	SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used with single gap for satellite access	3945
A.14.5.2.2.1	Test Purpose and Environment.....	3945
A.14.5.2.2.2	Test Requirements	3947
A.14.5.2.3	SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used with single gap for satellite access	3948
A.14.5.2.3.1	Test Purpose and Environment.....	3948
A.14.5.2.3.2	Test Requirements	3950
A.14.5.2.4	SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used with two gaps in fully non-overlapped for satellite access	3950
A.14.5.2.4.1	Test Purpose and Environment.....	3950
A.14.5.2.4.2	Test Requirements	3952
A.14.5.2.5	void	3953
A.14.5.2.5.1	void.....	3953
A.14.5.2.5.2	void.....	3953
A.14.5.2.6	SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used with two gaps in partially partial overlapping for satellite access	3953
A.14.5.2.6.1	Test Purpose and Environment.....	3953
A.14.5.2.6.2	Test Requirements	3955
A.14.5.2.7	Event triggered reporting test without gap under non-DRX	3955
A.14.5.2.7.1	Test purpose and Environment	3955
A.14.5.2.7.2	Test parameters.....	3955
A.14.5.2.7.3	Test Requirements	3957
A.14.5.2.8	Event triggered reporting tests without gap under DRX	3957
A.14.5.2.8.1	Test purpose and Environment	3957
A.14.5.2.8.2	Test parameters.....	3957
A.14.5.2.8.3	Test Requirements	3959
A.14.5.3	L1-RSRP measurement for beam reporting for satellite access.....	3960
A.14.5.3.1	SSB based L1-RSRP measurement for satellite access when DRX is not used.....	3960
A.14.5.3.1.1	Test Purpose and Environment.....	3960
A.14.5.3.1.2	Test parameters.....	3960

A.14.5.3.1.3	Test Requirements	3962
A.14.5.3.2	SSB based L1-RSRP measurement for satellite access when DRX is used	3962
A.14.5.3.2.1	Test Purpose and Environment	3962
A.14.5.3.2.2	Test parameters	3962
A.14.5.3.2.3	Test Requirements	3964
A.14.5.3.3	CSI-RS based L1-RSRP measurement for satellite access when DRX is not used	3964
A.14.5.3.3.1	Test Purpose and Environment	3964
A.14.5.3.3.2	Test parameters	3964
A.14.5.3.3.3	Test Requirements	3966
A.14.5.3.4	CSI-RS based L1-RSRP measurement for satellite access when DRX is used	3966
A.14.5.3.4.1	Test Purpose and Environment	3966
A.14.5.3.4.2	Test parameters	3966
A.14.5.3.4.3	Test Requirements	3968
A.14.6	Measurement Performance requirements	3968
A.14.6.1	SS-RSRP for SAN	3968
A.14.6.1.1	SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell	3968
A.14.6.1.1.1	Test Purpose and Environment	3968
A.14.6.1.1.2	Test parameters	3968
A.14.6.1.1.3	Test Requirements	3970
A.14.6.1.2	SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell	3970
A.14.6.1.2.1	Test Purpose and Environment	3970
A.14.6.1.2.2	Test parameters	3970
A.14.6.1.2.3	Test Requirements	3971
A.14.6.2	SS-RSRQ	3972
A.14.6.2.1	SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for satellite access	3972
A.14.6.2.1.1	Test Purpose and Environment	3972
A.14.6.2.1.2	Test Parameters	3972
A.14.6.2.1.3	Test Requirements	3973
A.14.6.2.2	SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for satellite access	3973
A.14.6.2.2.1	Test Purpose and Environment	3973
A.14.6.2.2.2	Test Parameters	3973
A.14.6.2.2.3	Test Requirements	3975
A.14.6.3	SS-SINR	3975
A.14.6.3.1	SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell	3975
A.14.6.3.1.1	Test Purpose and Environment	3975
A.14.6.3.1.2	Test Parameters	3975
A.14.6.3.1.3	Test Requirements	3978
A.14.6.3.2	SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell	3978
A.14.6.3.2.1	Test Purpose and Environment	3978
A.14.6.3.2.2	Test Parameters	3978
A.14.6.3.2.3	Test Requirements	3980
A.14.6.4	L1-RSRP measurement for beam reporting	3981
A.14.6.4.1	SSB based L1-RSRP measurement	3981
A.14.6.4.1.1	Test Purpose and Environment	3981
A.14.6.4.1.2	Test parameters	3981
A.14.6.4.1.3	Test Requirements	3983
A.14.6.4.2	CSI-RS based L1-RSRP measurement on resource set with repetition off	3983
A.14.6.4.2.1	Test Purpose and Environment	3983
A.14.6.4.2.2	Test parameters	3983
A.14.6.4.2.3	Test Requirements	3985
A.15	NR standalone tests with one or more NR cells in FR2-2	3986
A.15.1	SA: RRC_IDLE state mobility	3986
A.15.1.1	Cell re-selection to NR	3986
A.15.1.1.1	Cell reselection to FR2-2 intra-frequency NR case	3986
A.15.1.1.1.1	Test Purpose and Environment	3986
A.15.1.1.1.2	Test Parameters	3986
A.15.1.1.1.3	Test Requirements	3988
A.15.1.2	Cell reselection to FR2-2 inter-frequency NR case	3989
A.15.1.2.1	Test Purpose and Environment	3989

A.15.1.2.2	Test Parameters	3989
A.15.1.2.3	Test Requirements	3991
A.15.1.3	Cell reselection to FR2-2 intra-frequency NR case for UE fulfilling low mobility relaxed measurement criterion	3992
A.15.1.3.1	Test Purpose and Environment	3992
A.15.1.3.2	Test Parameters	3992
A.15.1.3.3	Test Requirements	3994
A.15.1.4	Cell reselection to FR2-2 intra-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion	3994
A.15.1.4.1	Test Purpose and Environment	3994
A.15.1.4.2	Test Parameters	3994
A.15.1.4.3	Test Requirements	3996
A.15.1.5	Cell reselection to FR2-2 inter-frequency NR case for UE fulfilling low mobility relaxed measurement criterion	3997
A.15.1.5.1	Test Purpose and Environment	3997
A.15.1.5.2	Test Parameters	3997
A.15.1.5.3	Test Requirements	3999
A.15.1.6	Cell reselection to FR2-2 inter-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion	4000
A.15.1.6.1	Test Purpose and Environment	4000
A.15.1.6.2	Test Parameters	4000
A.15.1.6.3	Test Requirements	4002
A.15.2	Signaling characteristics	4003
A.15.2.1	SCell Activation and Deactivation Delay	4003
A.15.2.1.1	SCell Activation and deactivation for SCell in FR2-2 intra-band in non-DRX	4003
A.15.2.1.1.1	Test Purpose and Environment	4003
A.15.2.1.1.2	Test Requirements	4005
A.15.2.1.2	SCell Activation and deactivation for FR1+FR2-2 inter-band with target SCell in FR2-2	4005
A.15.2.1.2.1	Test Purpose and Environment	4005
A.15.2.1.2.2	Test Requirements	4008
A.15.2.1.3	SCell Activation and deactivation for SCell in FR2-2 inter-band in non-DRX	4009
A.15.2.1.3.1	Test Purpose and Environment	4009
A.15.2.1.3.2	Test Requirements	4012
A.15.2.1.4	Direct SCell activation at SCell addition of known SCell in FR2-2	4012
A.15.2.1.4.1	Test Purpose and Environment	4012
A.15.2.1.4.2	Test Requirements	4015
A.15.2.1.5	Direct SCell activation at handover with known SCell in FR2-2	4016
A.15.2.1.5.1	Test Purpose and Environment	4016
A.15.2.1.5.2	Test Requirements	4019
A.15.3	RRC_CONNECTED state mobility	4020
A.15.3.1	Handover	4020
A.15.3.1.1	Intra-frequency handover from FR2-2 carrier with CCA to FR2-2 carrier with CCA; unknown target cell	4020
A.15.3.1.1.1	Test Purpose and Environment	4020
A.15.3.1.1.2	Test Parameters	4020
A.15.3.1.1.3	Test Requirements	4022
A.15.3.1.2	Inter-frequency handover from FR1 to FR2-2 carrier with CCA; unknown target cell	4022
A.15.3.1.2.1	Test Purpose and Environment	4022
A.15.3.1.2.2	Test Parameters	4023
A.15.3.1.2.3	Test Requirements	4025
A.15.4	Measurement procedure	4025
A.15.4.1	Intra-frequency Measurements	4025
A.15.4.1.1	SA event triggered reporting test without gap under non-DRX for FR2-2 with CCA	4025
A.15.4.1.1.1	Test purpose and Environment	4025
A.15.4.1.1.2	Test Requirements	4028
A.15.4.2	Inter-frequency Measurements	4029
A.15.4.2.1	SA event triggered reporting tests for FR2-2 with CCA without SSB time index detection when DRX is not used (PCell in FR2-2)	4029
A.15.4.2.1.1	Test Purpose and Environment	4029
A.15.4.2.1.2	Test Requirements	4031
A.16	NR standalone tests with all NR cells in FR1 for RedCap	4032

A.16.1	SA: RRC_IDLE state mobility for RedCap	4032
A.16.1.1	Cell re-selection to NR	4032
A.16.1.1.1	Cell reselection to FR1 intra-frequency NR case for 1 Rx UE	4032
A.16.1.1.1.1	Test Purpose and Environment.....	4032
A.16.1.1.1.2	Test Parameters	4032
A.16.1.1.1.3	Test Requirements.....	4034
A.16.1.1.2	Cell reselection to FR1 intra-frequency NR case for 2 Rx UE	4035
A.16.1.1.2.1	Test Purpose and Environment.....	4035
A.16.1.1.2.2	Test Parameters	4035
A.16.1.1.2.3	Test Requirements.....	4037
A.16.1.1.3	Cell reselection to FR1 inter-frequency NR case for 1 Rx UE	4038
A.16.1.1.3.1	Test Purpose and Environment.....	4038
A.16.1.1.3.2	Test Parameters	4038
A.16.1.1.3.3	Test Requirements.....	4040
A.16.1.1.4	Cell reselection to FR1 inter-frequency NR case for 2 Rx UE	4041
A.16.1.1.4.1	Test Purpose and Environment.....	4041
A.16.1.1.4.2	Test Parameters	4041
A.16.1.1.4.3	Test Requirements.....	4043
A.16.1.1.5	Cell reselection to FR1 intra-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE	4044
A.16.1.1.5.1	Test Purpose and Environment.....	4044
A.16.1.1.5.2	Test Parameters	4044
A.16.1.1.5.3	Test Requirements.....	4046
A.16.1.1.6	Cell reselection to FR1 intra-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE	4047
A.16.1.1.6.1	Test Purpose and Environment.....	4047
A.16.1.1.6.2	Test Parameters	4047
A.16.1.1.6.3	Test Requirements.....	4050
A.16.1.1.7	Cell reselection to FR1 inter-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE	4050
A.16.1.1.7.1	Test Purpose and Environment.....	4050
A.16.1.1.7.2	Test Parameters	4050
A.16.1.1.7.3	Test Requirements.....	4054
A.16.1.1.8	Cell reselection to FR1 inter-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE	4054
A.16.1.1.8.1	Test Purpose and Environment.....	4054
A.16.1.1.8.2	Test Parameters	4055
A.16.1.1.8.3	Test Requirements.....	4059
A.16.1.2	Inter-RAT E-UTRAN cell re-selection for RedCap	4060
A.16.1.2.1	Cell reselection to higher priority E-UTRAN for 1RX.....	4060
A.16.1.2.1.1	Test Purpose and Environment.....	4060
A.16.1.2.1.2	Test Parameters	4060
A.16.1.2.1.3	Test Requirements.....	4063
A.16.1.2.2	Cell reselection to higher priority E-UTRAN for 2RX.....	4063
A.16.1.2.2.1	Test Purpose and Environment.....	4063
A.16.1.2.2.2	Test Parameters	4063
A.16.1.2.2.3	Test Requirements.....	4066
A.16.1.2.3.1	Test Purpose and Environment.....	4067
A.16.1.2.3.2	Test Parameters	4067
A.16.1.2.3.3	Test Requirements.....	4069
A.16.1.2.4.1	Test Purpose and Environment.....	4070
A.16.1.2.4.2	Test Parameters	4070
A.16.1.3.1.3	Test Requirements.....	4073
A.16.1.2.5	Cell reselection to lower priority E-UTRAN for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE.....	4073
A.16.1.2.5.1	Test Purpose and Environment.....	4073
A.16.1.2.5.2	Test Parameters	4073
A.16.1.2.5.3	Test Requirements.....	4076
A.16.1.2.6	Cell reselection to lower priority E-UTRAN for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE.....	4077
A.16.1.2.6.1	Test Purpose and Environment.....	4077
A.16.1.2.6.2	Test Parameters	4077

A.16.1.2.6.3	Test Requirements	4080
A.16.2	SA: RRC_INACTIVE state mobility for RedCap	4080
A.16.2.1	Configured Grant based Small Data Transmissions (CG-SDT) for RedCap	4080
A.16.2.1.1	NR UE CG-SDT Test in FR1 for 1Rx RedCap UE	4080
A.16.2.1.1.1	Test purpose and Environment	4080
A.16.2.1.1.2	Test Parameters	4082
A.16.2.1.1.3	Test requirements	4084
A.16.2.1.2	NR UE CG-SDT Test in FR1 for 2Rx RedCap UE	4084
A.16.2.1.2.1	Test purpose and Environment	4084
A.16.2.1.2.2	Test Parameters	4086
A.16.2.1.2.3	Test requirements	4087
A.16.3	RRC_CONNECTED state mobility for RedCap	4088
A.16.3.1	Handover	4088
A.16.3.1.1	Intra-frequency handover from FR1 to FR1; known target cell for 1 Rx UE	4088
A.16.3.1.1.1	Test Purpose and Environment	4088
A.16.3.1.1.2	Test Parameters	4088
A.16.3.1.1.3	Test Requirements	4090
A.16.3.1.2	Intra-frequency handover from FR1 to FR1; known target cell for 2 Rx UE	4090
A.16.3.1.2.1	Test Purpose and Environment	4090
A.16.3.1.2.2	Test Parameters	4090
A.16.3.1.2.3	Test Requirements	4092
A.16.3.1.3	Intra-frequency handover from FR1 to FR1; unknown target cell for 1 Rx UE	4093
A.16.3.1.3.1	Test Purpose and Environment	4093
A.16.3.1.3.2	Test Parameters	4093
A.16.3.1.3.3	Test Requirements	4095
A.16.3.1.4	Intra-frequency handover from FR1 to FR1; unknown target cell for 2 Rx UE	4095
A.16.3.1.4.1	Test Purpose and Environment	4095
A.16.3.1.4.2	Test Parameters	4095
A.16.3.1.5	Inter-frequency handover from FR1 to FR1; unknown target cell for 1 Rx UE	4098
A.16.3.1.5.1	Test Purpose and Environment	4098
A.16.3.1.5.2	Test Parameters	4098
A.16.3.1.5.3	Test Requirements	4100
A.16.3.1.6	Inter-frequency handover from FR1 to FR1; unknown target cell for 2 Rx UE	4101
A.16.3.1.6.1	Test Purpose and Environment	4101
A.16.3.1.6.2	Test Parameters	4101
A.16.3.1.6.3	Test Requirements	4103
A.16.3.1.7	SA NR - E-UTRAN handover for 1Rx UE	4103
A.16.3.1.7.1	Test Purpose and Environment	4103
A.16.3.1.7.2	Test Requirements	4107
A.16.3.1.8	SA NR - E-UTRAN handover for 2Rx UE	4107
A.16.3.1.8.1	Test Purpose and Environment	4107
A.16.3.1.8.2	Test Requirements	4111
A.16.3.1.9	SA NR - E-UTRAN handover with unknown target cell for 1 Rx UE	4112
A.16.3.1.9.1	Test Purpose and Environment	4112
A.16.3.1.9.2	Test Requirements	4115
A.16.3.1.10	SA NR - E-UTRAN handover with unknown target cell for 2 Rx UE	4115
A.16.3.1.10.1	Test Purpose and Environment	4115
A.16.3.1.10.2	Test Requirements	4119
A.16.3.2	RRC Connection Mobility Control	4119
A.16.3.2.1	SA: RRC Re-establishment	4119
A.16.3.2.1.1	Intra-frequency RRC Re-establishment in FR1 for 1 Rx UE	4119
A.16.3.2.1.2	Intra-frequency RRC Re-establishment in FR1 for 2 Rx UE	4122
A.16.3.2.1.3	Inter-frequency RRC Re-establishment in FR1 for 1 Rx UE	4125
A.16.3.2.1.4	Inter-frequency RRC Re-establishment in FR1 for 2 Rx UE	4128
A.16.3.2.1.5	Intra-frequency RRC Re-establishment in FR1 for 1 Rx UE without serving cell timing	4132
A.16.3.2.1.6	Intra-frequency RRC Re-establishment in FR1 for 2 Rx UE without serving cell timing	4135
A.16.3.2.2	Random Access	4138
A.16.3.2.2.1	4-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE	4138
A.16.3.2.2.2	4-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE	4141
A.16.3.2.2.3	4-step RA type non-contention based random access test in FR1 for NR standalone for 1 Rx UE	4145
A.16.3.2.2.5	2-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE	4152

A.16.3.2.2.6	2-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE....	4155
A.16.3.2.2.7	2-step RA type non-contention based test in FR1 for NR standalone for 1 RX UE.....	4158
A.16.3.2.2.8	2-step RA type non-contention based test in FR1 for NR standalone for 2 RX UE.....	4161
A.16.3.2.3	SA: RRC Connection Release with Redirection	4164
A.16.3.2.3.1	Redirection from NR in FR1 to NR in FR1 for 1 Rx UE	4164
A.16.3.2.3.2	Redirection from NR in FR1 to NR in FR1 for 2 Rx UE	4166
A.16.3.2.3.3	Redirection from NR in FR1 to E-UTRAN for 1 Rx UE	4169
A.16.3.2.3.4	Redirection from NR in FR1 to E-UTRAN for 2 Rx UE	4173
A.16.4	Timing for RedCap.....	4177
A.16.4.1	UE transmit timing	4177
A.16.4.1.1	NR UE Transmit Timing Test for FR1 for 1Rx RedCap UE	4177
A.16.4.1.1.1	Test Purpose and environment	4177
A.16.4.1.1.2	Test requirements	4179
A.16.4.1.2	NR UE Transmit Timing Test for FR1 for 2Rx RedCap UE	4179
A.16.4.1.2.1	Test Purpose and environment	4179
A.16.4.1.2.2	Test requirements	4181
A.16.4.2	UE timer accuracy	4181
A.16.4.3	Timing advance	4181
A.16.4.3.1	SA FR1 timing advance adjustment accuracy for 1 Rx UE	4181
A.16.4.3.1.1	Test Purpose and Environment.....	4181
A.16.4.3.1.2	Test Parameters	4181
A.16.4.3.1.3	Test Requirements.....	4184
A.16.4.3.2	SA FR1 timing advance adjustment accuracy for 2 Rx UE	4184
A.16.4.3.2.1	Test Purpose and Environment.....	4184
A.16.4.3.2.2	Test Parameters	4184
A.16.4.3.2.3	Test Requirements.....	4187
A.16.5	Signalling characteristics for RedCap	4187
A.16.5.1	Radio link Monitoring	4187
A.16.5.1.1	Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE.....	4187
A.16.5.1.1.1	Test Purpose and Environment.....	4187
A.16.5.1.1.2	Test Requirements.....	4191
A.16.5.1.2	Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE.....	4191
A.16.5.1.2.1	Test Purpose and Environment.....	4191
A.16.5.1.2.2	Test Requirements.....	4195
A.16.5.1.3	Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE.....	4195
A.16.5.1.3.1	Test Purpose and Environment.....	4195
A.16.5.1.3.2	Test Requirements.....	4198
A.16.5.1.4	Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE.....	4198
A.16.5.1.4.1	Test Purpose and Environment.....	4198
A.16.5.1.4.2	Test Requirements.....	4202
A.16.5.1.5	Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE.....	4202
A.16.5.1.5.1	Test Purpose and Environment.....	4202
A.16.5.1.5.2	Test Requirements.....	4205
A.16.5.1.6	Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE.....	4206
A.16.5.1.6.1	Test Purpose and Environment.....	4206
A.16.5.1.6.2	Test Requirements.....	4209
A.16.5.1.7	Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE	4209
A.16.5.1.7.1	Test Purpose and Environment.....	4209
A.16.5.1.7.2	Test Requirements.....	4212
A.16.5.1.8	Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE	4213
A.16.5.1.8.1	Test Purpose and Environment.....	4213
A.16.5.1.8.2	Test Requirements.....	4216
A.16.5.1.9	Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE.....	4216

A.16.5.1.9.1	Test Purpose and Environment.....	4216
A.16.5.1.9.2	Test Requirements.....	4219
A.16.5.1.10	Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE.....	4220
A.16.5.1.10.1	Test Purpose and Environment.....	4220
A.16.5.1.10.2	Test Requirements.....	4223
A.16.5.1.11	Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE.....	4223
A.16.5.1.11.1	Test Purpose and Environment.....	4223
A.16.5.1.11.2	Test Requirements.....	4226
A.16.5.1.12	Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE.....	4227
A.16.5.1.12.1	Test Purpose and Environment.....	4227
A.16.5.1.12.2	Test Requirements.....	4230
A.16.5.1.13	Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE.....	4230
A.16.5.1.13.1	Test Purpose and Environment.....	4230
A.16.5.1.13.2	Test Requirements.....	4233
A.16.5.1.14	Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE.....	4233
A.16.5.1.14.1	Test Purpose and Environment.....	4233
A.16.5.1.14.2	Test Requirements.....	4236
A.16.5.1.15	Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE.....	4237
A.16.5.1.15.1	Test Purpose and Environment.....	4237
A.16.5.1.15.2	Test Requirements.....	4240
A.16.5.1.16	Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE.....	4240
A.16.5.1.16.1	Test Purpose and Environment.....	4240
A.16.5.1.16.2	Test Requirements.....	4244
A.16.5.2	Beam Failure Detection and Link recovery procedures.....	4244
A.16.5.2.1	Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 1 Rx UE.....	4244
A.16.5.2.1.1	Test Purpose and Environment.....	4244
A.16.5.2.1.2	Test Requirements.....	4248
A.16.5.2.2	Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE.....	4248
A.16.5.2.2.1	Test Purpose and Environment.....	4248
A.16.5.2.2.2	Test Requirements.....	4252
A.16.5.2.3	Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode for 1 Rx UE.....	4253
A.16.5.2.3.1	Test Purpose and Environment.....	4253
A.16.5.2.3.2	Test Requirements.....	4257
A.16.5.2.4	Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode for 2 Rx UE.....	4257
A.16.5.2.4.1	Test Purpose and Environment.....	4257
A.16.5.2.4.2	Test Requirements.....	4261
A.16.5.2.5	Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 1 Rx UE.....	4261
A.16.5.2.5.1	Test Purpose and Environment.....	4261
A.16.5.2.5.2	Test Requirements.....	4265
A.16.5.2.6	Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 2 Rx UE.....	4265
A.16.5.2.6.1	Test Purpose and Environment.....	4265
A.16.5.2.6.2	Test Requirements.....	4269
A.16.5.2.7	Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode for 1 Rx UE.....	4269
A.16.5.2.7.1	Test Purpose and Environment.....	4269
A.16.5.2.7.2	Test Requirements.....	4273
A.16.5.2.8	Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode for 2 Rx UE.....	4273
A.16.5.2.8.1	Test Purpose and Environment.....	4273

A.16.5.2.8.2	Test Requirements	4277
A.16.5.3	Active BWP switch.....	4277
A.16.5.3.1	DCI-based and Timer-based Active BWP Switch	4277
A.16.5.3.1.1	NR FR1 DL active BWP switch with non-DRX in SA for 1 Rx UE	4277
A.16.5.3.1.1.1	Test Purpose and Environment	4277
A.16.5.3.1.2.1	Test Requirements	4280
A.16.5.3.1.2	NR FR1 DL active BWP switch with non-DRX in SA for 2 Rx UE	4281
A.16.5.3.1.2.1	Test Purpose and Environment	4281
A.16.5.3.1.2.2	Test Requirements	4283
A.16.5.3.2	RRC-based Active BWP Switch	4284
A.16.5.3.2.1	NR FR1 DL active BWP switch of Cell with non-DRX in SA for 1 Rx UE.....	4284
A.16.5.3.2.1.1	Test Purpose and Environment	4284
A.16.5.3.2.1.2	Test Requirements	4287
A.16.5.3.2.2	NR FR1 DL active BWP switch of Cell with non-DRX in SA for 2 Rx UE.....	4287
A.16.5.3.2.2.1	Test Purpose and Environment	4287
A.16.5.3.2.2.2	Test Requirements	4289
A.16.5.4	UE specific CBW change	4290
A.16.5.4.1	UE specific CBW change on PCell in FR1 in non-DRX for 1 Rx UE.....	4290
A.16.5.4.1.1	Test Purpose and Environment.....	4290
A.16.5.4.1.2	Test Requirements	4292
A.16.5.4.2	UE specific CBW change on PCell in FR1 in non-DRX for 2 Rx UE.....	4293
A.16.5.4.2.1	Test Purpose and Environment.....	4293
A.16.5.4.2.2	Test Requirements	4295
A.16.6	Measurement procedure for RedCap	4296
A.16.6.1	Intra-frequency Measurements	4296
A.16.6.1.1	SA event triggered reporting tests without gap under non-DRX for 1 Rx UE	4296
A.16.6.1.1.1	Test purpose and Environment	4296
A.16.6.1.1.2	Test parameters.....	4296
A.16.6.1.1.3	Test Requirements	4298
A.16.6.1.2	SA event triggered reporting tests without gap under non-DRX for 2 Rx UE	4298
A.16.6.1.2.1	Test purpose and Environment	4298
A.16.6.1.2.2	Test parameters.....	4298
A.16.6.1.2.3	Test Requirements	4300
A.16.6.1.3	SA event triggered reporting tests without gap under DRX for 1 Rx UE	4301
A.16.6.1.3.1	Test purpose and Environment	4301
A.16.6.1.3.2	Test parameters.....	4301
A.16.6.1.3.3	Test Requirements	4303
A.16.6.1.4	SA event triggered reporting tests without gap under DRX for 2 Rx UE	4303
A.16.6.1.4.1	Test purpose and Environment	4303
A.16.6.1.4.2	Test parameters.....	4303
A.16.6.1.4.3	Test Requirements	4305
A.16.6.1.5	SA event triggered reporting tests with per-UE gaps under non-DRX for 1 Rx UE.....	4306
A.16.6.1.5.1	Test purpose and Environment	4306
A.16.6.1.5.2	Test parameters.....	4306
A.16.6.1.5.3	Test Requirements	4308
A.16.6.1.6	SA event triggered reporting tests with per-UE gaps under non-DRX for 2 Rx UE.....	4308
A.16.6.1.6.1	Test purpose and Environment	4308
A.16.6.1.6.2	Test parameters.....	4308
A.16.6.1.6.3	Test Requirements	4310
A.16.6.1.7	SA event triggered reporting tests with per-UE gaps under DRX for 1 Rx UE	4311
A.16.6.1.7.1	Test purpose and Environment	4311
A.16.6.1.7.2	Test parameters.....	4311
A.16.6.1.7.3	Test Requirements	4313
A.16.6.1.8	SA event triggered reporting tests with per-UE gaps under DRX for 2 Rx UE	4313
A.16.6.1.8.1	Test purpose and Environment	4313
A.16.6.1.8.2	Test parameters.....	4314
A.16.6.1.8.3	Test Requirements	4316
A.16.6.1.9	SA event triggered reporting tests without gap under non-DRX with SSB index reading for 1 Rx UE	4316
A.16.6.1.9.1	Test purpose and Environment	4316
A.16.6.1.9.2	Test parameters.....	4316
A.16.6.1.9.3	Test Requirements	4318

A.16.6.1.10	SA event triggered reporting tests without gap under non-DRX with SSB index reading for 2 Rx UE	4318
A.16.6.1.10.1	Test purpose and Environment	4318
A.16.6.1.10.2	Test parameters	4318
A.16.6.1.10.3	Test Requirements	4320
A.16.6.1.11	SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 1 Rx UE	4320
A.16.6.1.11.1	Test purpose and Environment	4320
A.16.6.1.11.2	Test parameters	4320
A.16.6.1.11.3	Test Requirements	4322
A.16.6.1.12	SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 2 Rx UE	4322
A.16.6.1.12.1	Test purpose and Environment	4322
A.16.6.1.12.2	Test parameters	4322
A.16.6.1.12.3	Test Requirements	4324
A.16.6.2	Inter-frequency Measurements	4324
A.16.6.2.1	SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 1 Rx UE	4324
A.16.6.2.1.1	Test Purpose and Environment	4324
A.16.6.2.1.2	Test Requirements	4328
A.16.6.2.2	SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 2 Rx UE	4328
A.16.6.2.2.1	Test Purpose and Environment	4328
A.16.6.2.2.2	Test Requirements	4331
A.16.6.2.3	SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used for 1 Rx UE	4332
A.16.6.2.3.1	Test Purpose and Environment	4332
A.16.6.2.3.2	Test Requirements	4334
A.16.6.2.4	SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used for 2 Rx UE	4335
A.16.6.2.4.1	Test Purpose and Environment	4335
A.16.6.2.4.2	Test Requirements	4337
A.16.6.2.5	SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 1 Rx UE	4338
A.16.6.2.5.1	Test Purpose and Environment	4338
A.16.6.2.5.2	Test Requirements	4340
A.16.6.2.6	SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 2 Rx UE	4341
A.16.6.2.6.1	Test Purpose and Environment	4341
A.16.6.2.6.2	Test Requirements	4343
A.16.6.2.7	SA event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 1 Rx UE	4344
A.16.6.2.7.1	Test Purpose and Environment	4344
A.16.6.2.7.2	Test Requirements	4346
A.16.6.2.8	SA event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 2 Rx UE	4347
A.16.6.2.8.1	Test Purpose and Environment	4347
A.16.6.2.8.2	Test Requirements	4349
A.16.6.2.9	SA event triggered reporting tests with additional mandatory gap pattern for 1 Rx UE	4350
A.16.6.2.9.1	Test Purpose and Environment	4350
A.16.6.2.9.2	Test Requirements	4352
A.16.6.2.10	SA event triggered reporting tests with additional mandatory gap pattern for 2 Rx UE	4353
A.16.6.2.10.1	Test Purpose and Environment	4353
A.16.6.2.10.2	Test Requirements	4355
A.16.6.2.11	SA event triggered reporting tests for FR1 when DRX is used for 1 Rx UE	4356
A.16.6.2.11.1	Test Purpose and Environment	4356
A.16.6.2.11.2	Test Requirements	4358
A.16.6.2.12	SA event triggered reporting tests for FR1 when DRX is used for 2 Rx UE	4359
A.16.6.2.12.1	Test Purpose and Environment	4359
A.16.6.2.12.2	Test Requirements	4362
A.16.6.3	Inter-RAT Measurements	4362
A.16.6.3.1	SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1 for 1 Rx UE	4362

A.16.6.3.1.1	Test purpose and Environment	4362
A.16.6.3.1.2	Test Requirements	4366
A.16.6.3.2	SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1 for 2 Rx UE	4366
A.16.6.3.2.1	Test purpose and Environment	4366
A.16.6.3.2.2	Test Requirements	4370
A.16.6.3.3	SA NR - E-UTRAN event-triggered reporting in DRX in FR1 for 1 Rx UE.....	4370
A.16.6.3.3.1	Test purpose and Environment	4370
A.16.6.3.3.2	Test Requirements	4374
A.16.6.3.4	SA NR - E-UTRAN event-triggered reporting in DRX in FR1 for 2 Rx UE.....	4375
A.16.6.3.4.1	Test purpose and Environment	4375
A.16.6.3.4.2	Test Requirements	4379
A.16.6.4	L1-RSRP measurement for beam reporting.....	4379
A.16.6.4.1	SSB based L1-RSRP measurement when DRX is not used for 1 Rx UE	4379
A.16.6.4.1.1	Test Purpose and Environment.....	4379
A.16.6.4.1.2	Test parameters.....	4379
A.16.6.4.1.3	Test Requirements	4381
A.16.6.4.2	SSB based L1-RSRP measurement when DRX is not used for 2 Rx UE	4381
A.16.6.4.2.1	Test Purpose and Environment.....	4381
A.16.6.4.2.2	Test parameters.....	4382
A.16.6.4.2.3	Test Requirements	4383
A.16.6.4.3	SSB based L1-RSRP measurement when DRX is used for 1 Rx UE	4384
A.16.6.4.3.1	Test Purpose and Environment.....	4384
A.16.6.4.3.2	Test parameters.....	4384
A.16.6.4.3.3	Test Requirements	4386
A.16.6.4.4	SSB based L1-RSRP measurement when DRX is used for 2 Rx UE	4386
A.16.6.4.4.1	Test Purpose and Environment.....	4386
A.16.6.4.4.2	Test parameters.....	4386
A.16.6.4.4.3	Test Requirements	4388
A.16.6.4.5	CSI-RS based L1-RSRP measurement when DRX is not used for 1 Rx UE	4388
A.16.6.4.5.1	Test Purpose and Environment.....	4388
A.16.6.4.5.2	Test parameters.....	4388
A.16.6.4.5.3	Test Requirements	4390
A.16.6.4.6	CSI-RS based L1-RSRP measurement when DRX is not used for 2 Rx UE	4391
A.16.6.4.6.1	Test Purpose and Environment.....	4391
A.16.6.4.6.2	Test parameters.....	4391
A.16.6.4.6.3	Test Requirements	4393
A.16.6.4.7	CSI-RS based L1-RSRP measurement when DRX is used for 1 Rx UE	4393
A.16.6.4.7.1	Test Purpose and Environment.....	4393
A.16.6.4.7.2	Test parameters.....	4393
A.16.6.4.7.3	Test Requirements	4395
A.16.6.4.8	CSI-RS based L1-RSRP measurement when DRX is used for 2 Rx UE	4395
A.16.6.4.8.1	Test Purpose and Environment.....	4395
A.16.6.4.8.2	Test parameters.....	4395
A.16.6.4.8.3	Test Requirements	4397
A.16.6.5	NR measurements with autonomous gaps	4398
A.16.6.5.1	SA intra-frequency CGI identification of NR neighbor cell in FR1 for 1 Rx UE.....	4398
A.16.6.5.1.1	Test Purpose and Environment.....	4398
A.16.6.5.1.2	Test Parameters	4398
A.16.6.5.1.3	Test Requirements	4400
A.16.6.5.2	SA intra-frequency CGI identification of NR neighbor cell in FR1 for 2 Rx UE.....	4400
A.16.6.5.2.1	Test Purpose and Environment.....	4400
A.16.6.5.2.2	Test Parameters	4400
A.16.6.5.2.3	Test Requirements	4402
A.16.6.5.3	Identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA for 1 Rx UE.....	4403
A.16.6.5.3.1	Test Purpose and Environment.....	4403
A.16.6.5.3.2	Test Requirements	4406
A.16.6.5.4	Identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA for 2 Rx UE.....	4406
A.16.6.5.4.1	Test Purpose and Environment.....	4406
A.16.6.5.4.2	Test Requirements	4409
A.16.7	Measurement Performance requirements for RedCap.....	4410

A.16.7.1	SS-RSRP	4410
A.16.7.1.1	SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE	4410
A.16.7.1.1.1	Test Purpose and Environment	4410
A.16.7.1.1.2	Test parameters	4410
A.16.7.1.1.3	Test Requirements	4413
A.16.7.1.2	SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE	4413
A.16.7.1.2.1	Test Purpose and Environment	4413
A.16.7.1.2.2	Test parameters	4414
A.16.7.1.2.3	Test Requirements	4417
A.16.7.1.3	SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE	4417
A.16.7.1.3.1	Test Purpose and Environment	4417
A.16.7.1.3.2	Test parameters	4417
A.16.7.1.3.3	Test Requirements	4420
A.16.7.1.4	SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE	4421
A.16.7.1.4.1	Test Purpose and Environment	4421
A.16.7.1.4.2	Test parameters	4421
A.16.7.1.4.3	Test Requirements	4424
A.16.7.2	SS-RSRQ	4424
A.16.7.2.1	SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE	4424
A.16.7.2.1.1	Test Purpose and Environment	4424
A.16.7.2.1.2	Test Parameters	4424
A.16.7.2.1.3	Test Requirements	4428
A.16.7.2.2	SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE	4428
A.16.7.2.2.1	Test Purpose and Environment	4428
A.16.7.2.2.2	Test Parameters	4428
A.16.7.2.2.3	Test Requirements	4432
A.16.7.2.3	SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE	4432
A.16.7.2.3.1	Test Purpose and Environment	4432
A.16.7.2.3.2	Test parameters	4432
A.16.7.2.3.3	Test Requirements	4436
A.16.7.2.4	SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE	4436
A.16.7.2.4.1	Test Purpose and Environment	4436
A.16.7.2.4.2	Test parameters	4436
A.16.7.2.4.3	Test Requirements	4440
A.16.7.3	SS-SINR	4440
A.16.7.3.1	SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE	4440
A.16.7.3.1.1	Test Purpose and Environment	4440
A.16.7.3.1.2	Test parameters	4441
A.16.7.3.1.3	Test Requirements	4444
A.16.7.3.2	SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE	4444
A.16.7.3.2.1	Test Purpose and Environment	4444
A.16.7.3.2.2	Test parameters	4444
A.16.7.3.3	SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE	4447
A.16.7.3.3.1	Test Purpose and Environment	4447
A.16.7.3.3.2	Test parameters	4447
A.16.7.3.3.3	Test Requirements	4450
A.16.7.3.4	SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE	4450
A.16.7.3.4.1	Test Purpose and Environment	4450
A.16.7.3.4.2	Test parameters	4450
A.16.7.3.4.3	Test Requirements	4454

A.16.7.4	L1-RSRP measurement for beam reporting.....	4454
A.16.7.4.1	SSB based L1-RSRP measurement for 1 Rx UE	4454
A.16.7.4.1.1	Test Purpose and Environment.....	4454
A.16.7.4.1.2	Test parameters.....	4454
A.16.7.4.1.3	Test Requirements.....	4457
A.16.7.4.2	SSB based L1-RSRP measurement for 2 Rx UE	4457
A.16.7.4.2.1	Test Purpose and Environment.....	4457
A.16.7.4.2.2	Test parameters.....	4457
A.16.7.4.2.3	Test Requirements.....	4457
A.16.7.4.3	CSI-RS based L1-RSRP measurement on resource set with repetition off for 1 Rx UE	4458
A.16.7.4.3.1	Test Purpose and Environment.....	4458
A.16.7.4.3.2	Test parameters.....	4458
A.16.7.4.3.3	Test Requirements.....	4461
A.16.7.4.4	CSI-RS based L1-RSRP measurement on resource set with repetition off for 2 Rx UE	4461
A.16.7.4.4.1	Test Purpose and Environment.....	4461
A.16.7.4.4.2	Test parameters.....	4461
A.16.7.4.4.3	Test Requirements.....	4461
A.16.7.5	E-UTRAN RSRP	4461
A.16.7.5.1	SA: inter-RAT measurement accuracy with FR1 serving cell for 1 Rx UE.....	4461
A.16.7.5.1.1	Test Purpose and Environment.....	4461
A.16.7.5.1.2	Test parameters.....	4462
A.16.7.5.1.3	Test Requirements.....	4465
A.16.7.5.2	SA: inter-RAT measurement accuracy with FR1 serving cell for 2 Rx UE.....	4465
A.16.7.5.2.1	Test Purpose and Environment.....	4465
A.16.7.5.2.2	Test parameters.....	4465
A.16.7.5.2.3	Test Requirements.....	4469
A.16.7.6	E-UTRAN RSRQ	4469
A.16.7.6.1	SA: inter-RAT measurement accuracy with FR1 serving cell for 1 Rx UE.....	4469
A.16.7.6.1.1	Test Purpose and Environment.....	4469
A.16.7.6.1.2	Test parameters.....	4469
A.16.7.6.1.3	Test Requirements.....	4473
A.16.7.6.2	SA: inter-RAT measurement accuracy with FR1 serving cell for 2 Rx UE.....	4473
A.16.7.6.2.1	Test Purpose and Environment.....	4473
A.16.7.6.2.2	Test parameters.....	4473
A.16.7.6.2.3	Test Requirements.....	4477
A.17	NR standalone tests with one or more NR cells in FR2 for RedCap.....	4478
A.17.1	SA: RRC_IDLE state mobility for RedCap	4478
A.17.1.1	Cell re-selection to NR	4478
A.17.1.1.1	Cell reselection to FR2 intra-frequency NR case for 2 Rx.....	4478
A.17.1.1.1.1	Test Purpose and Environment.....	4478
A.17.1.1.1.2	Test Parameters	4478
A.17.1.1.1.3	Test Requirements.....	4480
A.17.1.1.2	Cell reselection to FR2 inter-frequency NR case	4481
A.17.1.1.2.1	Test Purpose and Environment.....	4481
A.17.1.1.2.2	Test Parameters	4481
A.17.1.1.2.3	Test Requirements.....	4483
A.17.1.1.3	Cell reselection to FR2 intra-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE	4483
A.17.1.1.3.1	Test Purpose and Environment.....	4483
A.17.1.1.3.2	Test Parameters	4484
A.17.1.1.3.3	Test Requirements.....	4485
A.17.1.1.4	Cell reselection to FR2 inter-frequency NR case for UE fulfilling stationary mobility relaxed measurement criterion for 2 Rx UE	4486
A.17.1.1.4.1	Test Purpose and Environment.....	4486
A.17.1.1.4.2	Test Parameters	4486
A.17.1.1.4.3	Test Requirements.....	4488
A.17.2	SA: RRC_INACTIVE state mobility for RedCap.....	4489
A.17.2.1	Configured Grant based Small Data Transmissions (CG-SDT) for RedCap	4489
A.17.2.1.1	TA validation for CG-SDT in FR2 for RedCap	4489
A.17.2.1.1.1	Test Purpose and Environment.....	4489
A.17.2.1.1.2	Test Requirements.....	4492

A.17.3	RRC_CONNECTED state mobility for RedCap	4493
A.17.3.1	Handover for RedCap	4493
A.17.3.1.1	Intra-frequency handover from FR2 to FR2; unknown target cell for 2 Rx	4493
A.17.3.1.1.1	Test Purpose and Environment	4493
A.17.3.1.1.2	Test Parameters	4493
A.17.3.1.1.3	Test Requirements	4494
A.17.3.1.2	Inter-frequency handover from FR2 to FR2; unknown target cell for 2 Rx	4495
A.17.3.1.2.1	Test Purpose and Environment	4495
A.17.3.1.2.2	Test Parameters	4495
A.17.3.1.2.3	Test Requirements	4496
A.17.3.2	RRC Connection Mobility Control for RedCap	4497
A.17.3.2.1	SA: RRC Re-establishment	4497
A.17.3.2.1.1	Intra-frequency RRC Re-establishment in FR2	4497
A.17.3.2.1.1.1	Test Purpose and Environment	4497
A.17.3.2.1.2	Inter-frequency RRC Re-establishment in FR2	4499
A.17.3.2.1.2.1	Test Purpose and Environment	4499
A.17.3.2.1.3	Intra-frequency RRC Re-establishment in FR2 without serving cell timing	4501
A.17.3.2.1.3.1	Test Purpose and Environment	4501
A.17.3.2.1.3.2	Test Requirements	4503
A.17.3.2.2	Random Access	4504
A.17.3.2.2.1	4-step RA type contention based random access test in FR2 for NR Standalone	4504
A.17.3.2.2.1.1	Test Purpose and Environment	4504
A.17.3.2.2.1.2	Test Requirements	4505
A.17.3.2.2.2	4-step RA type non-contention based random access test in FR2 for NR Standalone	4507
A.17.3.2.2.2.1	Test Purpose and Environment	4507
A.17.3.2.2.2.2	Test Requirements	4509
A.17.3.2.2.3	2-step RA type contention based random access test in FR2 for NR Standalone	4511
A.17.3.2.2.3.1	Test Purpose and Environment	4511
A.17.3.2.2.3.2	Test Requirements	4512
A.17.3.2.2.4	2-step RA type non-contention based random access test in FR2 for NR Standalone	4513
A.17.3.2.2.4.1	Test Purpose and Environment	4513
A.17.3.2.2.4.2	Test Requirements	4515
A.17.3.2.3	SA: RRC Connection Release with Redirection	4516
A.17.3.2.3.1	Redirection from NR in FR2 to NR in FR2	4516
A.17.3.2.3.1.1	Test Purpose and Environment	4516
A.17.3.2.3.1.2	Test Parameters	4516
A.17.3.2.3.1.3	Test Requirements	4518
A.17.4	Timing	4519
A.17.4.1	UE transmit timing	4519
A.17.4.1.1	NR UE Transmit Timing Test for FR2	4519
A.17.4.1.1.1	Test Purpose and environment	4519
A.17.4.1.1.2	Test requirements	4521
A.17.4.2	UE timer accuracy	4522
A.17.4.3	Timing advance	4522
A.17.4.3.1	SA FR2 timing advance adjustment accuracy	4522
A.17.4.3.1.1	Test Purpose and Environment	4522
A.17.4.3.1.2	Test Parameters	4522
A.17.4.3.1.3	Test Requirements	4524
A.17.5	Signaling characteristics for RedCap	4525
A.17.5.1	Radio link Monitoring for RedCap	4525
A.17.5.1.1	Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode	4525
A.17.5.1.1.1	Test Purpose and Environment	4525
A.17.5.1.1.2	Test Requirements	4528
A.17.5.1.2	Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode	4528
A.17.5.1.2.1	Test Purpose and Environment	4528
A.17.5.1.2.2	Test Requirements	4531
A.17.5.1.3	Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode	4532
A.17.5.1.3.1	Test Purpose and Environment	4532
A.17.5.1.3.2	Test Requirements	4535

A.17.5.1.4	Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode.....	4535
A.17.5.1.4.1	Test Purpose and Environment.....	4535
A.17.5.1.4.2	Test Requirements.....	4538
A.17.5.1.5	Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode.....	4538
A.17.5.1.5.1	Test Purpose and Environment.....	4538
A.17.5.1.5.2	Test Requirements.....	4541
A.17.5.1.6	Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode.....	4541
A.17.5.1.6.1	Test Purpose and Environment.....	4541
A.17.5.1.6.2	Test Requirements.....	4544
A.17.5.1.7	Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode.....	4544
A.17.5.1.7.1	Test Purpose and Environment.....	4544
A.17.5.1.7.2	Test Requirements.....	4547
A.17.5.1.8	Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode.....	4548
A.17.5.1.8.1	Test Purpose and Environment.....	4548
A.17.5.1.8.2	Test Requirements.....	4551
A.17.5.1.9	UE Radio Link Monitoring Scheduling Restrictions on FR2.....	4551
A.17.5.1.9.1	Test Purpose and Environment.....	4551
A.17.5.1.9.2	Test Requirements.....	4553
A.17.5.2	Beam Failure Detection and Link recovery procedures.....	4553
A.17.5.2.1	Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode.....	4553
A.17.5.2.1.1	Test Purpose and Environment.....	4553
A.17.5.2.1.2	Test Requirements.....	4557
A.17.5.2.2	Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode.....	4557
A.17.5.2.2.1	Test Purpose and Environment.....	4557
A.17.5.2.2.2	Test Requirements.....	4560
A.17.5.2.3	Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode.....	4561
A.17.5.2.3.1	Test Purpose and Environment.....	4561
A.17.5.2.3.2	Test Requirements.....	4564
A.17.5.2.4	Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode.....	4564
A.17.5.2.4.1	Test Purpose and Environment.....	4564
A.17.5.2.4.2	Test Requirements.....	4567
A.17.5.2.5	Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE.....	4568
A.17.5.2.5.1	Test Purpose and Environment.....	4568
A.17.5.2.5.2	Test Requirements.....	4572
A.17.5.3	Active BWP switch for RedCap.....	4572
A.17.5.3.1	DCI-based and Timer-based Active BWP Switch.....	4572
A.17.5.3.1.1	NR FR2 DL active BWP switch with non-DRX in SA.....	4572
A.17.5.3.1.1.1	Test Purpose and Environment.....	4572
A.17.5.3.1.1.2	Test Requirements.....	4574
A.17.5.3.2	RRC-based Active BWP Switch.....	4575
A.17.5.3.2.1	NR FR2 DL active BWP switch of PCell with non-DRX in SA.....	4575
A.17.5.3.2.1.1	Test Purpose and Environment.....	4575
A.17.5.3.2.1.2	Test Requirements.....	4578
A.17.5.4	Active TCI state switch delay.....	4578
A.17.5.4.1	MAC-CE based active TCI state switch.....	4578
A.17.5.4.1.1	NR PCell FR2 active TCI state switch for a known TCI state.....	4578
A.17.5.4.1.1.1	Test Purpose and Environment.....	4578
A.17.5.4.1.1.2	Test Requirements.....	4581
A.17.5.4.2	RRC based active TCI state switch.....	4581
A.17.5.4.2.1	NR PCell FR2 active TCI state switch for a known TCI state.....	4581
A.17.5.4.2.1.1	Test Purpose and Environment.....	4581
A.17.5.4.2.1.2	Test Requirements.....	4585

A.17.5.5	Uplink spatial relation switch delay	4585
A.17.5.5.1	MAC-CE based Spatial Relation switch	4585
A.17.5.5.1.1	NR PCell FR2 spatial relation associated with known DL-RS	4585
A.17.5.5.1.1.1	Test Purpose and Environment	4585
A.17.5.5.1.1.2	Test Requirements	4588
A.17.5.5.2	RRC based spatial relation switch	4588
A.17.5.5.2.1	NR PCell FR2 spatial relation switch associated with a known DL-RS	4588
A.17.5.5.2.1.2	Test Requirements	4590
A.17.5.6	UE specific CBW change	4590
A.17.5.6.1	NR FR2 UE specific CBW change of PCell with non-DRX in SA	4590
A.17.5.6.1.1	Test Purpose and Environment	4590
A.17.5.6.1.2	Test Requirements	4593
A.17.6	Measurement procedure for RedCap	4593
A.17.6.1	Intra-frequency Measurements	4593
A.17.6.1.1	SA event triggered reporting test without gap under non-DRX	4593
A.17.6.1.1.1	Test purpose and Environment	4593
A.17.6.1.1.2	Test Requirements	4596
A.17.6.1.2	SA event triggered reporting test without gap under DRX	4596
A.17.6.1.2.1	Test purpose and Environment	4596
A.17.6.1.2.2	Test Requirements	4597
A.17.6.1.3	SA event triggered reporting test with per-UE gaps under non-DRX	4597
A.17.6.1.3.1	Test purpose and Environment	4597
A.17.6.1.3.2	Test Requirements	4600
A.17.6.1.4	SA event triggered reporting test with per-UE gaps under DRX	4600
A.17.6.1.4.1	Test purpose and Environment	4600
A.17.6.1.4.2	Test Requirements	4603
A.17.6.2	Inter-frequency Measurements	4603
A.17.6.2.1	SA event triggered reporting tests For FR2 without SSB time index detection when DRX is not used (PCell in FR2)	4603
A.17.6.2.1.1	Test Purpose and Environment	4603
A.17.6.2.1.2	Test Requirements	4606
A.17.6.2.2	SA event triggered reporting tests For FR2 without SSB time index detection when DRX is used (PCell in FR2)	4606
A.17.6.2.2.1	Test Purpose and Environment	4606
A.17.6.2.2.2	Test Requirements	4609
A.17.6.2.3	SA event triggered reporting tests For FR2 with SSB time index detection when DRX is not used (PCell in FR2)	4609
A.17.6.2.3.1	Test Purpose and Environment	4609
A.17.6.2.3.2	Test Requirements	4612
A.17.6.2.4	SA event triggered reporting tests For FR2 with SSB time index detection when DRX is used (PCell in FR2) for 2 RX UE	4612
A.17.6.2.4.1	Test Purpose and Environment	4612
A.17.6.2.4.2	Test Requirements	4615
A.17.6.3	L1-RSRP measurement for beam reporting	4615
A.17.6.3.1	SSB based L1-RSRP measurement when DRX is not used	4615
A.17.6.3.1.1	Test Purpose and Environment	4615
A.17.6.3.1.2	Test parameters	4615
A.17.6.3.1.3	Test Requirements	4616
A.17.6.3.2	SSB based L1-RSRP measurement when DRX is used	4616
A.17.6.3.2.1	Test Purpose and Environment	4616
A.17.6.3.2.2	Test parameters	4616
A.17.6.3.2.3	Test Requirements	4618
A.17.6.3.3	CSI-RS based L1-RSRP measurement when DRX is not used	4618
A.17.6.3.3.1	Test Purpose and Environment	4618
A.17.6.3.3.2	Test parameters	4618
A.17.6.3.3.3	Test Requirements	4620
A.17.6.3.4	CSI-RS based L1-RSRP measurement when DRX is used	4620
A.17.6.3.4.1	Test Purpose and Environment	4620
A.17.6.3.4.2	Test parameters	4621
A.17.6.3.3.3	Test Requirements	4622
A.17.6.4	NR Measurements with autonomous gaps	4623
A.17.6.4.1	SA interfrequency CGI reporting in autonomous gaps test (PCell in FR2) for 2 RX UE	4623

A.17.6.4.1.1	Test Purpose and Environment.....	4623
A.17.6.4.1.2	Test Requirements.....	4626
A.17.7	Measurement Performance requirements	4626
A.17.7.1	SS-RSRP.....	4626
A.17.7.1.1	SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	4626
A.17.7.1.1.1	Test Purpose and Environment.....	4626
A.17.7.1.1.2	Test parameters.....	4626
A.17.7.1.1.3	Test Requirements.....	4628
A.17.7.1.2	SA inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell	4629
A.17.7.1.2.1	Test Purpose and Environment.....	4629
A.17.7.1.2.2	Test parameters.....	4629
A.17.7.1.2.3	Test Requirements.....	4631
A.17.7.2	SS-RSRQ.....	4632
A.17.7.2.1	SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell	4632
A.17.7.2.1.1	Test Purpose and Environment.....	4632
A.17.7.2.1.2	Test Parameters	4633
A.17.7.2.1.3	Test Requirements.....	4634
A.17.7.2.2	SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell for 2 Rx UE.....	4634
A.17.7.2.2.1	Test Purpose and Environment.....	4634
A.17.7.2.2.2	Test parameters.....	4634
A.17.7.2.2.3	Test Requirements.....	4636
A.17.7.3	L1-RSRP measurement for beam reporting.....	4636
A.17.7.3.1	SSB based L1-RSRP measurement.....	4636
A.17.7.3.1.1	Test Purpose and Environment.....	4636
A.17.7.3.1.2	Test parameters.....	4636
A.17.7.3.1.3	Test Requirements.....	4636
A.17.7.3.2	CSI-RS based L1-RSRP measurement on resource set with repetition off.....	4637
A.17.7.3.2.1	Test Purpose and Environment.....	4637
A.17.7.3.2.2	Test parameters.....	4637
A.17.7.3.2.3	Test Requirements.....	4637
A.17.7.4	SS-SINR	4638
A.17.7.4.1	SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell for 2Rx UE.....	4638
A.17.7.4.1.1	Test Purpose and Environment.....	4638
A.17.7.4.1.2	Test parameters.....	4638
A.17.7.4.1.3	Test Requirements.....	4640
A.17.7.4.2	SA inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell for 2Rx UE	4640
A.17.7.4.2.1	Test Purpose and Environment.....	4640
A.17.7.4.2.2	Test Parameters	4640
A.17.7.4.2.3	Test Requirements.....	4641
A.18	E-UTRA standalone tests for NR RRM for RedCap.....	4642
A.18.1	RRC_IDLE state mobility	4642
A.18.1.1	Inter-RAT NR Cell re-selection.....	4642
A.18.1.1.1	E-UTRA Cell reselection to higher priority NR target Cell in FR1	4642
A.18.1.1.1.1	Test Purpose and Environment.....	4642
A.18.1.1.1.2	Test Requirements.....	4645
A.18.2	RRC_CONNECTED state mobility	4645
A.18.2.1	Handover	4645
A.18.2.1.1	E-UTRAN - NR handover in FR1.....	4645
A.18.2.1.1.1	Test Purpose and Environment.....	4645
A.18.2.1.1.2	Test Requirements.....	4649
A.18.2.2	RRC connection release with redirection.....	4650
A.18.2.2.1	Redirection from E-UTRA to NR FR1 for redcap UE.....	4650
A.18.2.2.1.1	Test Purpose and Environment.....	4650
A.18.2.2.1.2	Test Parameters	4650
A.18.2.2.1.3	Test Requirements.....	4653
A.18.3	Measurement procedure	4654
A.18.3.1	E-UTRA – NR Inter-RAT Measurements	4654

A.18.3.1.1	NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used	4654
A.18.3.1.1.1	Test Purpose and Environment.....	4654
A.18.3.1.1.2	Test Requirements.....	4657
A.18.3.1.2	NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used	4658
A.18.3.1.2.1	Test Purpose and Environment.....	4658
A.18.3.1.2.2	Test Requirements.....	4661
A.18.3.1.3	NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used	4662
A.18.3.1.3.1	Test Purpose and Environment.....	4662
A.18.3.1.3.2	Test Requirements.....	4665
A.18.3.1.4	NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used.....	4666
A.18.3.1.4.1	Test Purpose and Environment.....	4666
A.18.3.1.4.2	Test Requirements.....	4669
A.18.3.1.5	NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is not used	4670
A.18.3.1.5.1	Test Purpose and Environment.....	4670
A.18.3.1.5.2	Test Requirements.....	4672
A.18.3.1.6	NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is used	4672
A.18.3.1.6.1	Test Purpose and Environment.....	4672
A.18.3.1.6.2	Test Requirements.....	4674
A.18.3.1.7	NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is not used	4675
A.18.3.1.7.1	Test Purpose and Environment.....	4675
A.18.3.1.7.2	Test Requirements.....	4677
A.18.3.1.8	NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is used.....	4677
A.18.3.1.8.1	Test Purpose and Environment.....	4677
A.18.3.1.8.2	Test Requirements.....	4679

Annex B (normative): Conditions for RRM requirements applicability for operating bands .4681

B.1	Conditions for NR RRC_IDLE state mobility	4681
B.1.1	Introduction	4681
B.1.2	Conditions for measurements on NR intra-frequency cells for cell re-selection	4681
B.1.2A	Conditions for measurements on NR intra-frequency cells under CCA for cell re-selection.....	4682
B.1.3	Conditions for measurements on NR inter-frequency cells for cell re-selection	4682
B.1.3A	Conditions for measurements on NR inter-frequency cells under CCA for cell re-selection.....	4682
B.1.4	Conditions for measurements on NR intra-frequency cells for cell re-selection for RedCap.....	4683
B.1.5	Conditions for measurements on NR inter-frequency cells for cell re-selection for RedCap.....	4684
B.1.6	Conditions for measurements on NR intra-frequency cells for cell re-selection for satellite access	4684
B.1.7	Conditions for measurements on NR inter-frequency cells for cell re-selection for satellite access	4685
B.2	Conditions for UE measurements procedures and performance requirements in RRC_CONNECTED state	4685
B.2.1	Introduction	4685
B.2.1.1	General.....	4685
B.2.1.2	Derivation of Minimum SSB_RP values for FR1.....	4685
B.2.1.3	Derivation of Minimum SSB_RP values for FR2.....	4685
B.2.1.3.1	Minimum SSB_RP values for Rx Beam Peak angle of arrival	4685
B.2.1.3.2	Minimum SSB_RP values for angle of arrival within Spherical coverage	4686
B.2.1.4	Gain to SS-RSRP and CSI-RSRP measurement point for FR1	4687
B.2.1.5	Gain to SS-RSRP and CSI-RSRP measurement point for FR2	4687
B.2.1.5.1	Gain to SS-RSRP and CSI-RSRP measurement point for Rx Beam Peak angle of arrival.....	4687
B.2.1.5.2	Gain to SS-RSRP measurement point for different frequency	4687
B.2.1.5.3	Alignment of Rough beam to Rx beam Peak	4688
B.2.1.6	Gain to PRS-RSRP measurement point for FR2.....	4688
B.2.1.6.1	Gain to PRS-RSRP measurement point for Rx Beam Peak angle of arrival	4688
B.2.2	Conditions for NR intra-frequency measurements	4689

B.2.3	Conditions for NR inter-frequency measurements	4690
B.2.4	Conditions for NR L1-RSRP reporting	4691
B.2.4.1	Conditions for SSB based L1-RSRP reporting	4691
B.2.4.2	Conditions for CSI-RS based L1-RSRP reporting	4692
B.2.5	Conditions for RRC connection release with redirection to NR	4693
B.2.6	Void	4694
B.2.6.1	Void	4694
B.2.6.2	Void	4694
B.2.7	Conditions for SRS-RSRP measurements	4694
B.2.8	Conditions for NR L1-SINR reporting	4695
B.2.8.1	Conditions for L1-SINR reporting with CSI-RS based CMR and no dedicated IMR configured	4695
B.2.8.2	Conditions for L1-SINR reporting with SSB based CMR and dedicated IMR configured	4696
B.2.8.2.1	L1-SINR reporting with SSB based CMR and dedicated ZP-IMR configured	4696
B.2.8.2.2	L1-SINR reporting with SSB based CMR and dedicated NZP-IMR configured	4697
B.2.8.3	Conditions for L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured	4698
B.2.8.3.1	L1-SINR reporting with CSI-RS based CMR and dedicated ZP-IMR configured	4698
B.2.8.3.2	L1-SINR reporting with CSI-RS based CMR and dedicated NZP-IMR configured	4699
B.2.9	Conditions for NR intra-frequency measurements under CCA	4700
B.2.10	Conditions for NR inter-frequency measurements under CCA	4700
B.2.11	Conditions for NR L1-RSRP reporting under CCA	4701
B.2.11.1	Conditions for SSB based L1-RSRP reporting	4701
B.2.12	Conditions for NR CSI-RS based intra-frequency measurements	4701
B.2.13	Conditions for NR CSI-RS based inter-frequency measurements	4702
B.2.14	Conditions for NR PRS-based measurements	4703
B.2.15	Conditions for NR intra-frequency measurements for RedCap	4705
B.2.16	Conditions for NR inter-frequency measurements for RedCap	4706
B.2.17	Conditions for NR intra-frequency measurements for satellite access	4708
B.2.18	Conditions for NR inter-frequency measurements for satellite access	4708
B.2.19	Conditions for NR L1-RSRP reporting for satellite access	4709
B.2.19.1	Conditions for SSB based L1-RSRP reporting for satellite access	4709
B.2.19.2	Conditions for CSI-RS based L1-RSRP reporting for satellite access	4709
B.2.20	Conditions for RRC connection release with redirection to NR for satellite access	4709
B.3	RRM Requirements Exceptions	4709
B.3.1	Introduction	4709
B.3.2	Receiver sensitivity relaxation for CA	4710
B.3.2.1	Receiver sensitivity relaxation for UE supporting CA in FR1	4710
B.3.2.2	Receiver sensitivity relaxation for UE configured with CA in FR1	4710
B.3.2.2.1	Inter-band carrier aggregation	4710
B.3.2.2.2	Reference sensitivity exceptions due to UL harmonic interference for CA	4710
B.3.2.2.3	Reference sensitivity exceptions due to intermodulation interference due to 2UL CA	4710
B.3.2.3	Receiver sensitivity relaxation for UE supporting CA in FR2	4711
B.3.2.4	Receiver sensitivity relaxation for UE configured with CA in FR2	4711
B.3.2.4.1	Intra-band contiguous carrier aggregation	4711
B.3.2.4.2	Intra-band non-contiguous carrier aggregation	4711
B.3.3	Receiver sensitivity relaxation for DC	4711
B.3.3.1	Receiver sensitivity relaxation for EN-DC	4711
B.3.3.2	Receiver sensitivity relaxation for NE-DC	4711
B.3.4	Receiver sensitivity relaxation for SUL	4711
B.3.4.1	Receiver sensitivity relaxation for UE supporting SUL in FR1	4711
B.3.4.2	Receiver sensitivity relaxation for UE configured with SUL in FR1	4711
B.3.4.2.1	Reference sensitivity exceptions due to UL harmonic interference for SUL	4711
B.4	Conditions for V2X	4712
B.4.1	Test parameters for GNSS signals	4712
B.4.2	Conditions for PSBCH-RSRP Accuracy Requirements	4712
B.4.3	Conditions for Selection/Reselection to Intra-frequency SyncRef UE	4712
B.4.4	Conditions for L1 SL-RSRP Accuracy Requirements	4713
B.5	High level test procedure for SAN RRM tests	4713
Annex C (informative):	Change history	4714

History	4746
---------------	------

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

1 Scope

The present document specifies requirements for support of Radio Resource Management for the FDD and TDD modes of New Radio (NR). These requirements include requirements on measurements in NR and the UE as well as requirements on node dynamical behaviour and interaction, in terms of delay and response characteristics.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 38.304: "NR; User Equipment (UE) procedures in idle mode".
- [2] 3GPP TS 38.331: "NR; Radio Resource Control (RRC); Protocol specification".
- [3] 3GPP TS 38.213: "NR; Physical layer procedures for control".
- [4] 3GPP TS 38.215: "NR; Physical layer measurements".
- [5] 3GPP TS 38.533: "NR; User Equipment (UE) conformance specification; Radio Resource Management (RRM)".
- [6] 3GPP TS 38.211: "NR; Physical channels and modulation".
- [7] 3GPP TS 38.321: "NR; Medium Access Control (MAC) protocol specification".
- [8] 3GPP TS 38.212: "NR; Multiplexing and channel coding".
- [9] 3GPP TS 38.202: "NR; Physical layer services provided by the physical layer".
- [10] 3GPP TS 38.300: "NR; Overall description; Stage-2".
- [11] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [12] 3GPP TS 38.423: "NG-RAN; Xn Application Protocol (XnAP)".
- [13] 3GPP TS 38.104: "NR; Base Station (BS) radio transmission and reception".
- [14] 3GPP TS 38.306: "NR; User Equipment (UE) radio access capabilities".
- [15] 3GPP TS 36.133: "Evolved Universal Terrestrial Radio Access (E-UTRA); Requirements for support of radio resource management".
- [16] 3GPP TS 36.331: "Evolved Universal Terrestrial Radio Access (E-UTRA); Radio Resource Control (RRC) protocol specification".
- [17] 3GPP TS 37.340: "Evolved Universal Terrestrial Radio Access (E-UTRA) and NR; Multi-connectivity", Stage 2.
- [18] 3GPP TS 38.101-1: "NR; User Equipment (UE) radio transmission and reception; Part 1: Range 1 Standalone".
- [19] 3GPP TS 38.101-2: "NR; User Equipment (UE) radio transmission and reception; Part 2: Range 2 Standalone".

- [20] 3GPP TS 38.101-3: "NR; User Equipment (UE) radio transmission and reception; Part 3: Range 1 and Range 2 Interworking operation with other radios".
- [21] 3GPP TS 38.101-4: "NR; User Equipment (UE) radio transmission and reception; Part 4: Performance requirements".
- [22] 3GPP TS 38.305: "NG Radio Access Network (NG-RAN); Stage 2 functional specification of User Equipment (UE) positioning in NG-RAN".
- [23] 3GPP TS 36.211: "Evolved Universal Terrestrial Radio Access (E-UTRA); Physical Channels and Modulation".
- [24] 3GPP TS 36.300: "Evolved Universal Terrestrial Radio Access (E-UTRA); Overall description".
- [25] 3GPP TS 36.101: "Technical Specification Group Radio Access Network; Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) radio transmission and reception".
- [26] 3GPP TS 38.214: "NR; Physical layer procedures for data".
- [27] 3GPP TS 36.355: "Evolved Universal Terrestrial Radio Access (E-UTRA); LTE Positioning Protocol (LPP)".
- [28] Void.
- [29] 3GPP TS 25.133: "Requirements for Support of Radio Resource Management (FDD)".
- [30] 3GPP TS 25.302: "Services provided by the Physical Layer".
- [31] 3GPP TS 37.320: "Universal Terrestrial Radio Access (UTRA), Evolved Universal Terrestrial Radio Access (E-UTRA) and Next Generation Radio Access; Radio measurement collection for Minimization of Drive Tests (MDT); Overall description; Stage 2".
- [32] 3GPP TS 25.214: "Physical layer procedures (FDD)".
- [33] 3GPP TS 37.213: "Physical layer procedures for shared spectrum channel access"
- [34] 3GPP TS 37.355: "LTE Positioning Protocol (LPP) ".
- [35] 3GPP TS 38.455 : "NG-RAN; NR Positioning Protocol A (NRPPa) ".
- [36] 3GPP TS 37.106: "User Equipment (UE) requirements for shared spectrum channel access".
- [37] 3GPP TS 38.508-1: "5GS; User Equipment (UE) conformance specification; Part 1: Common test environment".
- [38] 3GPP TS 38.521-2: " NR; User Equipment (UE) conformance specification; Radio transmission and reception; Part 2: Range 2 Standalone".
- [39] 3GPP TS 24.008: "Mobile radio interface Layer 3 specification; Core network protocols; Stage 3".
- [40] 3GPP TS 38.101-5: "NR; User Equipment (UE) radio transmission and reception; Part 5: Satellite access Radio Frequency (RF) and performance requirements".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [11] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [11].

1 Rx RedCap: RedCap UE for which requirements are derived assuming 1 Rx branch.

2 Rx RedCap: RedCap UE for which requirements are derived assuming 2 Rx branches.

Active DL BWP: Active DL bandwidth part as defined in TS 38.213 [3].

Blackbox Approach: Testing methodology, in which the UE internal implementation of certain specific UE functionality involved in the test, is unknown.

CD-SSB: Cell defining SSB as defined in TS 38.300 [10].

Control Resource Set: As defined in TS 38.213 [3].

DL BWP: DL bandwidth part as defined in TS 38.213 [3].

EN-DC: E-UTRA-NR Dual Connectivity as defined in clause 4.1.2 of TS 37.340 [17].

en-gNB: As defined in TS 37.340 [17].

FR1: Frequency range 1 as defined in clause 5.1 of TS 38.104 [13].

FR2: Frequency range 2 as defined in clause 5.1 of TS 38.104 [13].

gNB: as defined in TS 38.300 [10].

IBM (Independent Beam Management): As defined in TS 38.101-2 [19].

LMF: as defined in TS 38.305 [22].

Master Cell Group: As defined in TS 38.331 [2].

Multi-Radio Dual Connectivity: Dual Connectivity between E-UTRA and NR nodes, or between two NR nodes, as defined in TS 37.340 [17].

NCD-SSB: Non cell defining SSB as defined in TS 38.300 [10].

ng-eNB: As defined in TS 38.300 [10].

NE-DC: NR-E-UTRA Dual Connectivity as defined in clause 4.1.3.2 of TS 37.340 [17].

NGEN-DC: NG-RAN E-UTRA-NR Dual Connectivity as defined in clause 4.1.3.1 of TS 37.340 [17].

NR-DC: NR-NR Dual Connectivity as defined in clause 4.1.3.3 of TS 37.340 [17].

Primary Cell: As defined in TS 38.331 [2].

PRS resource instance: An instance in time of a configured PRS resource as defined in TS 38.331 [2], which may or not overlap with a measurement gap occasion.

Quasi Co-Location: As defined in TS 38.214 [26].

RedCap UE: A UE with reduced capabilities as defined in clause 4.2 in TS 38.306 [14].

RLM-RS resource: A resource out of the set of resources configured for RLM by higher layer parameter RLM-RS-List [2] as defined in TS 38.213 [3].

SA operation mode: Operation mode when the UE is configured with at least PCell and not any MR-DC.

Secondary Cell: As defined in TS 38.331 [2].

Secondary Cell Group: As defined in TS 38.331 [2].

Serving Cell: As defined in TS 38.331 [2].

SMTC: An SSB-based measurement timing configuration configured by *SSB-MeasurementTimingConfiguration* as specified in TS 38.331 [2].

Special Cell: As defined in TS 38.331 [2].

SSB: SS/PBCH block as defined in clause 7.8.3 of TS 38.211 [6].

Timing Advance Group: As defined in TS 38.331 [2].

3.2 Symbols

For the purposes of the present document, the following symbols apply:

BW_{Channel}	Channel bandwidth, defined in TS 38.101-1, 38.101-2 and 38.101-3 subclause 3.2
$\hat{E}_s$	Received energy per RE (power normalized to the subcarrier spacing) during the useful part of the symbol, i.e. excluding the cyclic prefix, at the UE antenna connector or radiated interface boundary
F_C	<i>RF reference frequency</i> on the channel raster, given in table 5.4.2.2-1 in TS 38.101-1 and 38.101-2
$F_{C,\text{low}}$	The F_C of the lowest carrier, expressed in MHz
I_o	The total received power density, including signal and interference, as measured at the UE antenna connector or radiated interface boundary.
I_{oc}	The power spectral density (integrated in a noise bandwidth equal to the chip rate and normalized to the chip rate) of a band limited noise source (simulating interference from cells, which are not defined in a test procedure) as measured at the UE antenna connector or radiated interface boundary.
I_{ot}	The received power spectral density of the total noise and interference for a certain RE (power integrated over the RE and normalized to the subcarrier spacing) as measured at the UE antenna connector or radiated interface boundary
N_{oc}	The power spectral density of a white noise source (average power per RE normalised to the subcarrier spacing), simulating interference from cells that are not defined in a test procedure, as measured at the UE antenna connector or radiated interface boundary
n_{PRB}	Physical Resource Block number as defined in clause 3.2 in TS 38.211.
N_{TA}	Timing offset between uplink and downlink radio frames at the UE, as defined in clause 4.2 in TS 38.213.
$N_{TA \text{ offset}}$	Fixed timing advance offset, as defined in clause 7.1.2 in TS 38.133.
P_{CMAX}	Configured UE transmitted power as defined in clause 6.2.4 in TS 38.101-1, 38-101-2 and 38.101-3.
$P_{CMAX,c}$	Configured UE transmitted power on a serving cell c as defined in clause 6.2.4 in TS 38.101-1, 38-101-2 and 38.101-3
S	Cell Selection Criterion defined in TS 38.304, subclause 5.2.3.2 for NR
SSB_RP	Received (linear) average power of the resource elements that carry NR synchronisation burst, measured at the UE antenna connector or radiated interface boundary
S_{rxlev}	Cell selection RX level, defined in TS 38.304, subclause 5.2.3.2
S_{qual}	Cell selection quality, defined in TS 38.304, subclause 5.2.3.2
$S_{intrasearch}$	Defined in TS 38.304, subclause 5.2.4.7 for E-UTRAN and 38.304 subclause 5.2.4.7 for NR
$S_{nonintrasearch}$	Defined in TS 38.304, subclause 5.2.4.7
$Thresh_{x, \text{high}}$	Defined in TS 38.304, subclause 5.2.4.7
$Thresh_{x, \text{low}}$	Defined in TS 38.304, subclause 5.2.4.7
$Thresh_{\text{serving, low}}$	Defined in TS 38.304, subclause 5.2.4.7
$T_{RE-ESTABLISH-REQ}$	The RRC Re-establishment delay requirement, the time between the moment when erroneous CRCs are applied, to when the UE starts to send preambles on the PRACH.
T_c	Basic time unit, defined in clause 4.1 of TS 38.211 [6].
T_s	Reference time unit, defined in clause 4.1 of TS 38.211 [6].
$T_{\text{reselection}}$	Defined in TS 25.304, subclause 5.2.6.1.5
$T_{\text{reselectionRAT}}$	Defined in TS 36.304, subclause 5.2.4.7
$T_{\text{reselectionEUTRA}}$	Defined in TS 36.304, subclause 5.2.4.7
$T_{\text{reselectionUTRA}}$	Defined in TS 36.304, subclause 5.2.4.7
$T_{\text{reselectionGERAN}}$	Defined in TS 36.304, subclause 5.2.4.
$Thresh_{x, \text{high}}$	Defined in TS 38.304, subclause 5.2.4.7
$Thresh_{x, \text{low}}$	Defined in TS 38.304, subclause 5.2.4.7
$Thresh_{\text{serving, low}}$	Defined in TS 38.304, subclause 5.2.4.7
$T_{UE_re-establish_delay}$	Time between the moments when any of the conditions requiring RRC re-establishment as defined in clause 5.3.7 in TS 38.331 [2] is detected by the UE and when the UE sends PRACH to the target PCell.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [11] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [11].

AoA	Angle of Arrival
AoD	Angle of Departure
BFD	Beam Failure Detection
BFD-RS	BFD Reference Signal
BLER	Block Error Rate
BM-RS	Beam Management Reference Signal
BWP	Bandwidth Part
CA	Carrier Aggregation
CBD	Candidate Beam Detection
CBW	Channel Bandwidth
CC	Component Carrier
CCA	Clear Channel Assessment
CG-SDT	Configured Grant Small Data Transmisison
CLI	Cross Link Interference
CMR	Channel Measurement Resource
CORESET	Control Resource Set
CP	Cyclic Prefix
CSI	Channel-State Information
CSI-RS	CSI Reference Signal
CSI-RSRP	CSI Reference Signal based Reference Signal Received Power
CSI-RSRQ	CSI Reference Signal based Reference Signal Received Quality
CSI-SINR	CSI Reference Signal based Signal to Noise and Interference Ratio
CSI_RP	Received (linear) average power of the resource elements that carry NR CSI-RS signals and channels, measured at the UE antenna connector
DAPS	Dual Active Protocol Stack
DBT	Discovery Burst Transmission
DC	Dual Connectivity
DCI	Downlink Control Information
DL	Downlink
DL-AoD	Downlink Angle-of-Departure
DL-TDOA	Downlink Time Difference Of Arrival
DMRS	Demodulation Reference Signal
DRX	Discontinuous Reception
E-CID	Enhanced Cell ID
E-UTRA	Evolved UTRA
E-UTRAN	Evolved UTRAN
EN-DC	E-UTRA-NR Dual Connectivity
FDD	Frequency Division Duplex
FR	Frequency Range
GEO	Geostationary Earth Orbit
HARQ	Hybrid Automatic Repeat Request
HO	Handover
GAP	Refers to any of Measurement Gap, activated Pre-MG and NCSG
IMR	Interference Measurement Resource
L1-RSRP	Layer 1 RSRP
L1 SL-RSRP	Layer 1 Sidelink RSRP which corresponds to PSCCH-RSRP and/or PSSCH-RSRP
LEO	Low Earth Orbit
LMF	Location Management Function
LPP	LTE Positioning Protocol
MAC	Medium Access Control
MCG	Master Cell Group
MDT	Minimization of Drive Tests
MG	Measurement Gap
MGL	Measurement Gap Length
MGRP	Measurement Gap Repetition Period

MIB	Master Information Block
ML	Measurement Length
MN	Master Node
MR-DC	Multi-Radio Dual Connectivity
MUSIM	Multi-Universal Subscriber Identity Module
NCSG	Network Controlled Small Gap
NE-DC	NR-E-UTRA Dual Connectivity
NGEN-DC	NG-RAN E-UTRA-NR Dual Connectivity
NR	New Radio
NR-DC	NR-NR Dual Connectivity
NTN	Non-Terrestrial Network
OFDM	Orthogonal Frequency Division Multiplexing
OFDMA	Orthogonal Frequency Division Multiple Access
OTDOA	Observed Time Difference Of Arrival
PBCH	Physical Broadcast Channel
PCC	Primary Component Carrier
PCell	Primary Cell
PDCCH	Physical Downlink Control Channel
PDSCH	Physical Downlink Shared Channel
PLMN	Public Land Mobile Network
PRACH	Physical RACH
Pre-MG	Pre-configured Measurement Gap
PRP	PRS Received Power
PRS	Positioning Reference Signal
PRS-RSRP	Positioning Reference Signal based Reference Signal Received Power
PPW	PRS Processing Window
PSBCH	Physical Sidelink Broadcast Channel
PSBCH-RSRP	Physical Sidelink Broadcast Channel DMRS based Reference Signal Received Power
PSCCH	Physical Sidelink Control Channel
PSCCH-RSRP	Physical Sidelink Control Channel DMRS based Reference Signal Received Power
PSCell	Primary SCell
PSS	Primary Synchronization Signal
PSSCH	Physical Sidelink Shared Channel
PSSCH-RSRP	Physical Sidelink Shared Channel DMRS based Reference Signal Received Power
pTAG	Primary Timing Advance Group
PUCCH	Physical Uplink Control Channel
PUSCH	Physical Uplink Shared Channel
QCL	Quasi Co-Location
RACH	Random Access Channel
RAT	Radio Access Technology
RLM	Radio Link Monitoring
RLM-RS	Reference Signal for RLM
RMSI	Remaining Minimum System Information
RRC	Radio Resource Control
RRH	Remote Radio Head
RRM	Radio Resource Management
RSSI	Received Signal Strength Indicator
RSRP	Reference Signal Received Power
RSRQ	Reference Signal Received Quality
RSTD	Reference Signal Time Difference
RTT	Round Trip Time
S-SSB	Sidelink Synchronization Signal Block
SSB_RP	Received (linear) average power of the resource elements that carry NR SSB signals and channels, measured at the UE antenna connector or radiated interface boundary.
SA	Standalone operation mode
SAB	Satellite access band
SAN	Satellite Access Node
SCC	Secondary Component Carrier
SCell	Secondary Cell
SCG	Secondary Cell Group
SCS	Subcarrier Spacing
SCS _{SSB}	SSB subcarrier spacing

SDL	Supplementary Downlink
SDT	Small Data Transmission
SFN	System Frame Number
SFTD	SFN and Frame Timing DifferenceSI System Information
SIB	System Information Block
SL-RSSI	Sidelink Received Signal Strength Indicator
SLSS	Sidelink Synchronization Signal
SMTC	SSB-based Measurement Timing configuration
SpCell	Special Cell
SRS	Sounding Reference Signal
SRS-RSRP	Sounding Reference Signal based Reference Signal Received Power
SS-RSRP	Synchronization Signal based Reference Signal Received Power
SS-RSRQ	Synchronization Signal based Reference Signal Received Quality
SS-SINR	Synchronization Signal based Signal to Noise and Interference Ratio
SSB	Synchronization Signal Block
SSB_RP	Received (linear) average power of the resource elements that carry NR SSB signals and channels, measured at the UE antenna connector.
SSS	Secondary Synchronization Signal
sTAG	Secondary Timing Advance Group
SUL	Supplementary Uplink
TA	Timing Advance
TAG	Timing Advance Group
TCI	Transmission Configuration Indicator
TDD	Time Division Duplex
TDOA	Time Difference Of Arrival
TN	Terrestrial Network
TRP	Transmission-Reception Point
TTI	Transmission Time Interval
UE	User Equipment
UL	Uplink
VIL	Visible Interruption Length
VIRP	Visible Interruption Repetition Period
VSAT	Very Small Aperture Terminal

3.4 Test tolerances

The requirements given in the present document make no allowance for measurement uncertainty. The test specification 38.533 [5] defines the test tolerances.

3.5 Frequency bands grouping

3.5.1 Introduction

The intention with the frequency band grouping below is to increase the readability of the specification.

The frequency bands grouping is derived based on UE REFSENS requirements specified in [18, 19, 20] and assuming 0.5 dB step between the neighbour groups. The groups are defined in the order of increasing REFSENS, i.e., the group A has the smallest REFSENS among the groups. For the same SCS and a given bandwidth, the bands within the same group have the same I_0 conditions in a corresponding requirement in this specification, provided the bands support this SCS. For different SCSs supported by a frequency band and the same bandwidth, different I_0 conditions may apply for the frequency band in the requirements, while the band group is the same, based on the lowest REFSENS requirement normalized by the number of subcarriers among its supported SCSs for this bandwidth. For the same SCS but different supported bandwidths, the group for a band is determined based on the lowest REFSENS requirement normalized by the number of subcarriers among its supported bandwidths.

3.5.2 NR operating bands in FR1

NR frequency bands grouping for FR1 is specified in Table 3.5.2-1.

Table 3.5.2-1: NR frequency band groups for FR1

Group	NR FDD		NR TDD		NR SDL		NR CCA ¹⁰	
	Band group notation	Operating bands	Band group notation	Operating bands	Band group notation	Operating bands	Band group notation	Operating bands
A	NR_FDD_FR1_A	n1, n18, n24, n70, n74 ⁴ , n91, n92, n93, n94, n100	NR_TDD_FR1_A	n34, n38 ⁹ , n39, n40, n50, n51, n53, n101	NR_SDL_FR1_A	n67, n75, n76	NR_CCA_FR1_A	-
B	NR_FDD_FR1_B	n65, n66, n74 ³	NR_TDD_FR1_B	n38 ⁷	NR_SDL_FR1_B	-	NR_CCA_FR1_B	-
C	NR_FDD_FR1_C	n30	NR_TDD_FR1_C	n48, n77 ¹ , n78, n79	NR_SDL_FR1_C	-	NR_CCA_FR1_C	-
D	NR_FDD_FR1_D	n28	NR_TDD_FR1_D	n77 ²	NR_SDL_FR1_D	-	NR_CCA_FR1_D	-
E	NR_FDD_FR1_E	n2, n5, n7	NR_TDD_FR1_E	n41, n90	NR_SDL_FR1_E	-	NR_CCA_FR1_E	-
F	NR_FDD_FR1_F	n26 ⁶	NR_TDD_FR1_F	-	NR_SDL_FR1_F	-	NR_CCA_FR1_F	-
G	NR_FDD_FR1_G	n3, n8, n12, n13, n14, n20, n71, n85	NR_TDD_FR1_G	n104	NR_SDL_FR1_G	n29	NR_CCA_FR1_G	-
H	NR_FDD_FR1_H	n25	NR_TDD_FR1_H	-	NR_SDL_FR1_H	-	NR_CCA_FR1_H	-
I	NR_FDD_FR1_I	-	NR_TDD_FR1_I	-	NR_SDL_FR1_I	-	NR_CCA_FR1_I	n46
J	NR_FDD_FR1_J	-	NR_TDD_FR1_J	n47 ⁸	NR_SDL_FR1_J	-	NR_CCA_FR1_J	n96, n102

NOTE 1: Except 3.8 GHz to 4.2 GHz.

NOTE 2: Only 3.8 GHz to 4.2 GHz.

NOTE 3: Except 1475.9 MHz to 1510.9 MHz.

NOTE 4: Only when the band is confined in 1475.9 MHz to 1510.9 MHz.

NOTE 5: These bands are used only in NR carrier aggregation with other NR bands according to NR CA band combinations specified in TS 38.101-1 [18] and TS 38.101-3 [20].

NOTE 6: The minimum Io condition is reduced by 0.5 dB when the carrier frequency of the assigned NR channel bandwidth is within 865-894 MHz.

NOTE 7: When this band is only used for V2X SL service, the band is exclusively used for NR V2X in particular regions.

NOTE 8: This band is unlicensed band used for V2X service. There is no expected network deployment in this band.

NOTE 9: When this band is only used for WAN service.

NOTE 10: Operating bands where operation on carrier frequencies with CCA is supported.

3.5.2A NR operating bands for satellite access in FR1

NR frequency bands grouping for satellite access in FR1 is specified in Table 3.5.2A-1.

Table 3.5.2A-1: NR frequency band groups for satellite access in FR1

Group	NR FDD	
	Band group notation	Operating bands
A	NR_FDD_SAB_FR1_A	n255, n256
B	NR_FDD_SAB_FR1_B	
C	NR_FDD_SAB_FR1_C	
D	NR_FDD_SAB_FR1_D	
E	NR_FDD_SAB_FR1_E	
F	NR_FDD_SAB_FR1_F	
G	NR_FDD_SAB_FR1_G	
H	NR_FDD_SAB_FR1_H	
I	NR_FDD_SAB_FR1_I	
J	NR_FDD_SAB_FR1_J	

3.5.3 NR operating bands in FR2

NR frequency bands grouping for FR2 is specified in Table 3.5.3-1.

Table 3.5.3-1: NR frequency band groups for FR2

Group	Band group notation	Operating bands
A	NR TDD FR2 A	n257 ¹ , n258 ¹ , n261 ¹
B	NR TDD FR2 B	n257 ⁴ , n258 ⁴ , n261 ⁴
C	NR TDD FR2 C	
D	NR TDD FR2 D	
E	NR TDD FR2 E	
F	NR TDD FR2 F	n260 ⁴
G	NR TDD FR2 G	n260 ¹
H	NR TDD FR2 H	
I	NR TDD FR2 I	
J	NR TDD FR2 J	
K	NR TDD FR2 K	n257 ^{5,6} , n258 ^{5,6} , n262 ¹ , n261 ⁶
L	NR TDD FR2 L	n257 ² , n258 ² , n261 ²
M	NR TDD FR2 M	
N	NR TDD FR2 N	n262 ⁴
O	NR TDD FR2 O	
P	NR TDD FR2 P	
Q	NR TDD FR2 Q	n259 ⁵
R	NR TDD FR2 R	
S	NR TDD FR2 S	
T	NR TDD FR2 T	n257 ³ , n258 ³ , n261 ³
U	NR TDD FR2 U	
V	NR TDD FR2 V	
W	NR TDD FR2 W	n262 ²
X	NR TDD FR2 X	
Y	NR TDD FR2 Y	n260 ³
Z	NR TDD FR2 Z	n257 ⁷ , n258 ⁷ , n261 ⁷
AA	NR TDD FR2 AA	n259 ³
AB	NR TDD FR2 AB	
AC	NR TDD FR2 AC	
AD	NR TDD FR2 AD	
AE	NR TDD FR2 AE	n262 ³
NOTE 1: UE power class 1. NOTE 2: UE power class 2. NOTE 3: UE power class 3. NOTE 4: UE power class 4. NOTE 5: UE power class 5. NOTE 6: UE power class 6. NOTE 7: UE power class 7.		

3.6 Applicability of requirements in this specification version

In this specification,

- ‘cell’, ‘PCell’, ‘PSCell’ and ‘SCell’ refer to NR cell, NR PCell, NR PSCell, and NR SCell,
- E-UTRA cells are referred to as ‘E-UTRA cell’, ‘E-UTRA PCell’, ‘E-UTRA PSCell’, and ‘E-UTRA SCell’,
- E-UTRA-NR dual connectivity where E-UTRA is the master is referred to as ‘E-UTRA-NR dual connectivity’ or ‘EN-DC’.
- NR-NR dual connectivity which involves two gNB acting as Master gNB and Secondary gNB is referred to as “NR-NR dual connectivity” or “NR-DC”. NR-DC in Rel-15 only includes the scenarios where all serving cells in MCG in FR1 and all serving cells in SCG in FR2.
- ‘active serving cell’ refers to PCell, PSCell and activated SCells

For UE configured with supplementary UL, the requirements in clause 7.1 and 7.3 shall also apply to uplink transmissions on supplementary UL.

Unless explicitly stated, requirements do not apply when CCA is used on serving or neighbour cells.

3.6.1 RRC connected state requirements in DRX

For the requirements in RRC connected state specified in this version of the specification, the UE shall assume that no DRX is used provided the following conditions are met:

- DRX parameters are not configured or
- DRX parameters are configured and
 - *drx-InactivityTimer* is running or
 - *drx-RetransmissionTimerDL* is running or
 - *drx-RetransmissionTimerUL* is running or
 - *ra-ContentionResolutionTimer* is running or
- a Scheduling Request sent on PUCCH is pending or
- a PDCCH indicating a new transmission addressed to the C-RNTI of the MAC entity has not been received after successful reception of a Random Access Response for the preamble not selected by the MAC entity

Otherwise the UE shall assume that DRX is used.

3.6.2 Number of serving carriers

3.6.2.1 Number of serving carriers for SA

Requirements for standalone NR with NR PCell are applicable for the UE configured with the following number of serving NR CCs:

- up to 16 NR DL CCs in total, with 1 UL (or 2 UL if SUL is configured) in PCell and up to 8 UL (or 9 UL if SUL is configured) in total for SCells.
- SUL may be configured together with one of the UL

3.6.2.2 Number of serving carriers for EN-DC

Requirements for EN-DC operation of E-UTRA and NR with E-UTRA PCell and NR PSCell are applicable for the UE configured with the following number of serving NR CCs:

- up to 9 NR DL CCs in total, with 1 UL (or 2 UL if SUL is configured) in PSCell, up to 7 UL (or 8 UL if SUL is configured) in total for SCells in the FR of PSCell and up to 1 UL (or 2 UL if SUL is configured) in SCell in different FR with PSCell.
- SUL may be configured together with one of the UL

The applicable number of E-UTRA CC for EN-DC in the MCG for both UL and DL is specified in TS 36.133 [15].

3.6.2.3 Number of serving carriers for NE-DC

Requirements for NE-DC operation of NR and E-UTRA with NR PCell and E-UTRA PSCell are applicable for the UE configured with the following number of serving NR CCs:

- up to 7 NR DL CCs in total, with 1 UL (or 2 UL if SUL is configured) in PCell and up to 1 UL (or 2 UL if SUL is configured) in SCell.
- SUL may be configured together with one of the UL

The applicable number of E-UTRA CC for NE-DC in the SCG for both UL and DL is specified in TS 36.133 [15].

3.6.2.4 Number of serving carriers for NR-DC

Requirements for NR-DC are applicable for the UE configured with the following number of serving NR CCs:

- up to 2 NR DL CCs in total in FR1, up to 8 NR DL CCs in total in FR2, with 1 UL in PCell, 1 UL in PSCell, and up to 1 UL in each SCell.

3.6.3 Applicability for intra-band FR2

For the requirements in RRC connected state specified in this version of the specification, UE shall assume that the transmitted signals from the serving cells have the same downlink spatial domain transmission filter on one OFDM symbol in the same band in FR2. Otherwise, the UE is not required to satisfy any requirements for SCell.

3.6.4 Applicability for FR2 UE power classes

For the requirements of each FR2 power class specified in this version of the specification, certain UE types with specific device architectures are assumed. The UE types can be found in TS 38.101-2 [19].

3.6.5 Applicability for SDL bands

The measurements accuracy requirements for SDL bands in this version of specification in clause 10.1 shall apply for NR intra-frequency measurements on SCC (SS-RSRP, SS-RSRQ, SS-SINR, and L1-RSRP) and inter-frequency measurements (SS-RSRP, SS-RSRQ, and SS-SINR).

3.6.6 Applicability of requirements for NGEN-DC operation

All the requirements in this specification applicable for EN-DC are also applicable for NGEN-DC.

3.6.7 Applicability of QCL

For the requirements specified in this version of the specification for TCI state switching, DL TCI state switching for unified TCI or UL TCI state switching for unified TCI, a reference signal is considered to be QCLed to another reference signal if it is in the same TCI chain as the other reference signal, provided that the number of Reference Signals in the chain is no more than 4. It is assumed there is single QCL type per TCI chain.

A DL TCI chain consists of an SSB, and one or more CSI-RS resources, and the TCI state of each Reference Signal includes another Reference Signal in the same TCI chain, where the SSB can be associated with serving cell PCID or associated with a PCID different from serving cell PCID.

DMRS of PDCCH or PDSCH is QCLed with the reference signal in its active TCI state and any other reference signal that is QCLed, based on the criteria for DL TCI chain, with the reference signal in the active TCI state.

A UL TCI chain consists of an SSB, and one or more CSI-RS resources, and the TCI state of each Reference Signal includes another Reference Signal in the same TCI chain, where the SSB can be associated with serving cell PCID or associated with a PCID different from serving cell PCID.

DMRS of PUCCH or PUSCH is QCLed with the reference signal in its active TCI state and any other reference signal that is QCLed, based on the criteria for UL TCI chain, with the reference signal in the active TCI state.

3.6.8 Applicability of 2-step RA and 4-step RA in RRM requirements

Unless explicitly stated otherwise the requirements under the following clauses, where the UE transmits random access (with requirements in clause 6.2.2) to NR serving cell or NR target cell, are applicable for both 2-step RA and 4-step RA procedures [3]:

- Handover requirements in clause 6.1, except for clauses 6.1.2 and 6.1B,
- RRC connection re-establishment requirements in clause 6.2.1,
- RRC connection release with redirection to NR requirements in clause 6.2.3.2.1,

- UE transmit timing requirements in clause 7.1,
- PSCell addition delay requirements in clause 8.9.2,
- PSCell change requirements in clause 8.11 and
- Conditional PSCell change requirements in clause 8.11B.

Unless explicitly stated otherwise the requirements under the following clauses, where the UE transmits random access (with requirements in clause 6.2.2A) to NR serving cell or NR target cell subject to uplink CCA, are applicable for both 2-step RA and 4-step RA procedures [3]:

- Handover requirements with CCA in clause 6.1B,
- RRC connection re-establishment requirements with CCA in clause 6.2.1A,
- RRC connection release with redirection to NR requirements with CCA in clause 6.2.3.2.3, and
- UE transmit timing requirements with CCA in clause 7.1.

3.6.9 Applicability of requirements for scheduling availability

The scheduling availability requirements in clause 8.1.7.3, 8.5.7.3, 8.5.8.3, 9.5.6.3 and 9.10.2.6.2 assumes that:

- The UE is not configured with simultaneous UL/DL between two FR2 bands if the UE does not have the capability of supporting *simultaneousRxTxInterBandCA*, and
- The UE is not configured with mixed numerology on two FR2 CCs if the UE does not have the capability of supporting simultaneous reception with two different numerologies between FR2 CCs in DL.

The scheduling availability requirements in clause 8.1.7.1, 8.1.7.2, 8.5.7.1, 8.5.7.2, 8.5.8.1, 8.5.8.2, 9.5.6.1, 9.5.6.2, 9.8.6.1, and 9.8.6.2 assumes that the UE is not configured with simultaneous UL/DL between two FR1 bands if the UE does not have the capability of supporting *simultaneousRxTxInterBandCA*.

The scheduling availability requirements in clause 8.1.7.4, 8.5.7.4, 8.5.8.4, 9.5.6.4 and 9.8.6.4 assumes that the UE is not configured with simultaneous UL/DL between FR1 and FR2 bands if the UE does not have the capability of supporting *simultaneousRxTxInterBandCA* on this band combination.

3.6.10 Applicability of requirements for measurement restrictions

The requirements for measurement restrictions in clause 8.1.2.3, 8.1.3.3, 8.5.2.3, 8.5.3.3, 8.5.5.3, 8.5.6.3, 8.18.2.3, 8.18.3.3, 8.18.5.3, 8.18.6.3, 9.5.5, 9.8.5 and 9.13.5 are not applicable if the following condition is met:

- The network configures mixed numerology on two CCs if the UE does not have the capability of supporting simultaneous reception with different numerologies between the two CCs in DL.

3.6.11 Applicability of requirements for Redcap UEs

3.6.11.1 RRC connected state requirements in DRX

The requirements in clause 3.6.1 shall apply.

3.6.11.2 Applicability for FR2 Redcap UE power classes

The requirements in clause 3.6.4 shall apply.

3.6.11.3 Applicability of QCL

The requirements in clause 3.6.7 shall apply.

3.6.12 Applicability of requirements for Satellite Access

The requirements for Satellite Access defined in clauses with suffix ‘C’ apply provided that UE indicates *nonTerrestrialNetwork* and is accessing a cell served by a Satellite Access Node (SAN). The requirements apply provided that serving and all neighbour satellites on the same layer are of same satellite type (LEO or GEO).

3.6.13 Applicability of requirements for FR2

Unless stated otherwise, the requirements for FR2 are applicable to both FR2-1 and FR2-2, except for the following cases:

SFTD measurement requirements in clause 9.2.5.4, 9.3.8, 10.1.21 for FR2 are only applicable for FR2-1,

CGI identification requirements in clause 9.11 for FR2 are only applicable for FR2-1,

Inter-band CA requirements in all corresponding clauses for FR2 are only applicable for FR2-1.

L1-RSRP measurements for a cell with different PCI from serving cell in clause 9.13 for FR2 are only applicable for FR2-1.

3.6.14 Applicability of requirements for FR2 Power Class 6

For Rel-17 FR2 power class 6 for the UE type of high speed train roof-mounted UE, UE shall only be in NR SA operation.

Measurement and evaluation period requirements with *highSpeedMeasFlagFR2-r17* configured in clause 4.2.2.3, 8.1.2.2, 8.5.2.2, 9.2.5, 9.2.6, 9.5.4, [9.8.4], delay requirements in clause 6.2.1.2.1, 8.10.3A, and UL timing adjustment in clause 7.1.2.3, are only applicable when any two SSBs from non-collocated adjacent RRHs are not on the same or consecutive symbols.

L1-SINR accuracy requirements for FR2 configured in clause 10.1.28 and intra-frequency SS-SINR accuracy requirements configured in clause 10.1.13 are not applicable to Rel-17 HST FR2 power class 6 UEs.

3.6.15 Applicability of requirements for per-FR gap

Requirements for per-FR gap are applicable for the UE indicating one of the following capabilities:

- Rel-15 capability “independentGapConfig”;
- Rel-17 capability “independentGapConfig-maxCC-r17,” and the number of configured serving cells is less than or equal to the indicated parameters “fr1-Only,” “fr2-Only,” and “fr1And2,” as specified in TS 38.306 [14].

4 SA: RRC_IDLE state mobility

4.1 Cell Selection

After a UE has switched on and a PLMN has been selected, the Cell selection process takes place, as described in TS 38.304 [1]. This process allows the UE to select a suitable cell where to camp on in order to access available services. In this process, the UE can use stored information (*Stored information cell selection*) or not (*Initial cell selection*).

The 1 Rx RedCap UE for the cell selection procedure [1] applies:

- *Qrxlevmin* as the signaled value of *Qrxlevmin* [2] -1 dB.
- *Qqualmin* as the signaled value of *Qqualmin* [2] -1 dB.

4.2 Cell Re-selection

4.2.1 Introduction

The cell reselection procedure allows the UE to select a more suitable cell and camp on it.

When the UE is in either *Camped Normally* state or *Camped on Any Cell* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency, inter-frequency and inter-RAT cells indicated by the serving cell. For intra-frequency and inter-frequency cells the serving cell may provide explicit neighbour list, or only carrier frequency information and bandwidth information. UE measurement activity is also controlled by measurement rules defined in TS 38.304 [1], allowing the UE to limit its measurement activity

In the requirements of clause 4.2, the exceptions for side conditions apply as follows:

- for the UE capable of CA, the applicable exceptions for side conditions are specified in Annex B, clause B.3.2.1, B.3.2.3, or B.3.2.5 for UE supporting CA in FR1, CA in FR2 and CA between FR1 and FR2, respectively;
- for the UE capable of SUL, the applicable exceptions for side conditions are specified in Annex B, clause B.3.4.1 for UE supporting SUL in FR1.

4.2.2 Requirements

4.2.2.1 UE measurement capability

For idle mode cell re-selection purposes, and for UE supporting *idleInactiveNR-MeasReport-r16*, *idleInactiveEUTRA-MeasReport-r16* or *idleInactiveNR-MeasReport-r17*, for NR CA and MR-DC measurement purpose, the UE shall be capable of monitoring at least:

- Intra-frequency carrier, and
- Depending on UE capability, 7 NR inter-frequency carriers, and
- Depending on UE capability, 7 FDD E-UTRA inter-RAT carriers, and
- Depending on UE capability, 7 TDD E-UTRA inter-RAT carriers.

In addition to the requirements defined above, a UE supporting E-UTRA measurements in RRC_IDLE state shall be capable of monitoring a total of at least 14 carrier frequency layers, which includes serving layer, comprising of any above defined combination of E-UTRA FDD, E-UTRA TDD and NR layers.

4.2.2.2 Measurement and evaluation of serving cell

The UE shall measure the SS-RSRP and SS-RSRQ level of the serving cell and evaluate the cell selection criterion S defined in TS 38.304 [1] for the serving cell at least once every $M1 \cdot N1$ DRX cycle; where:

$M1=2$ if SMTC periodicity (T_{SMTC}) > 20 ms and DRX cycle ≤ 0.64 second,
otherwise $M1=1$.

The UE shall filter the SS-RSRP and SS-RSRQ measurements of the serving cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by, at least $eDRX_IDLE$ cycle/2, if the UE is configured with $eDRX$ cycle ≤ 10.24 s; otherwise DRX cycle/2.

For UE not configured with *highSpeedMeasFlagFR2-r17*, N_{serv} is specified in Table 4.2.2.2-1. For FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*, N_{serv} is specified in Table 4.2.2.2-4.

If the UE is not configured with $eDRX_IDLE$ cycle and the UE has evaluated according to Table 4.2.2.2-1 or Table 4.2.2.2-4 in N_{serv} consecutive DRX cycles that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities.

If the UE is configured with eDRX_IDLE cycle ≤ 10.24 s and the UE has evaluated according to Table 4.2.2.2-2 and Table 4.2.2.2-3 in N_{serv} consecutive eDRX cycles that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities.

If the UE is configured with eDRX_IDLE cycle > 10.24 s and the UE has evaluated according to Table 4.2.2.2-2 and Table 4.2.2.2-3 in N_{serv} consecutive DRX cycles within a single PTW that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities.

If the UE in RRC_IDLE has not found any new suitable cell based on searches and measurements using the intra-frequency, inter-frequency and inter-RAT information indicated in the system information during the time T, the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 [1], where

- T= 10 s if the UE is not configured with eDRX_IDLE cycle, or
- T= MAX (10 s, one eDRX_IDLE cycle) if the UE is configured with eDRX_IDLE cycle in FR1, or
- T= MAX (10 s, $N1 \cdot \text{eDRX_IDLE cycle}$) if the UE is configured with eDRX_IDLE cycle less than 20.48s in FR2,
- Otherwise, T= MAX (10 s, one eDRX_IDLE cycle) if the UE is configured with eDRX_IDLE cycle no less than 20.48 s in FR2

Table 4.2.2.2-1: N_{serv}

DRX cycle length [s]	Scaling Factor (N1)			N _{serv} [number of DRX cycles]
	FR1	FR2-1 ^{Note1}	FR2-2 ^{Note2}	
0.32	1	8	12	M1*N1*4
0.64		5	8	M1*N1*4
1.28		4	6	N1*2
2.56		3	5	N1*2
Note 1:	Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.			
Note 2:	Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.			

Table 4.2.2.2-2: N_{serv} for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1)	Nserv [number of DRX or eDRX cycles Note 3]
2.56	N/A	N/A	1	N1*2
5.12	N/A	N/A		N1*2
10.24	N/A	N/A		N1*2
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥1.28 (1)		N1*M1*2
	0.64	≥ 1.28 (1) (M1=1) or ≥ 2.56 (2) (M1=2)		N1*M1*2
	1.28	≥2.56 (2)		N1*2
	2.56	≥5.12 (4)	N1*2	
NOTE 1: The number of DRX cycles in this table corresponds to the DRX cycles within PTWs, when PTW is configured.				
NOTE 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008[39].				
NOTE 3: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles.				
NOTE 4: The lower bound of PTW length is derived based on $\left\lceil \frac{N_{serv} \cdot DRX_cycle}{1.28} \right\rceil \cdot 1.28$.				

Table 4.2.2.2-3: N_{serv} for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	N_{serv} [number of DRX or eDRX cycles] Note 4]
2.56	N/A	N/A	3	$N1*2$
5.12	N/A	N/A	3	$N1*2$
10.24	N/A	N/A	3	$N1*2$
$20.48 \leq \text{eDRX_IDLE cycle length} \leq 10485.76$	0.32	≥ 5.12 (4)	8	$N1*2$
	0.64	≥ 6.4 (5)	5	$N1*2$
	1.28	≥ 10.24 (8)	4	$N1*2$
	2.56	≥ 15.36 (12)	3	$N1*2$
NOTE 1: Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, $N1 = 8$ for all DRX cycle length. NOTE 2: The number of DRX cycles in this table corresponds to the DRX cycles within PTWs, when PTW is configured. NOTE 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008[39]. NOTE 4: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles. NOTE 5: The lower bound of PTW length is derived based on $\left\lceil \frac{N_{serv} * \text{DRX_cycle}}{1.28} \right\rceil * 1.28$. NOTE 6: When eDRX=20.48s and DRX=0.32s, UE is allowed to perform cell evaluation within PTW in every 2 eDRX cycles.				

Table 4.2.2.2-4: N_{serv} for UE configured with *highSpeedMeasFlagFR2-r17* (Frequency range FR2)

DRX cycle length [s]	Scaling Factor (N1)	N_{serv} [number of DRX cycles]
0.32	$N2^{\text{Note1}}$	$M1*N1*4$
0.64	5	$M1*N1*4$
1.28	4	$N1*2$
2.56	3	$N1*2$
Note 1: $N2 = 2$ when <i>highSpeedMeasFlagFR2-r17</i> = set1; $N2 = 6$ when <i>highSpeedMeasFlagFR2-r17</i> = set2.		

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

4.2.2.3 Measurements of intra-frequency NR cells

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP and SS-RSRQ measurements of the identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in TS38.304 [1] within $T_{\text{detect,NR_Intra}}$ when that $T_{\text{reselection}} = 0$. An intra frequency cell is considered to be detectable according to the conditions defined in Annex B.1.2 for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $T_{\text{measure,NR_Intra}}$ (see table 4.2.2.3-1, table 4.2.2.3-2, table 4.2.2.3-3, table 4.2.2.3-4 or table 4.2.2.3-5) for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{\text{measure,NR_Intra}}/2$.

The UE shall not consider aN NR neighbour cell for cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined in TS38.304 [1] within $T_{\text{evaluate,NR_Intra}}$ when $T_{\text{reselection}} = 0$ as specified in table 4.2.2.3-1, table 4.2.2.3-2, table 4.2.2.3-3, table 4.2.2.3-4 or table 4.2.2.3-5 provided that

when *rangeToBestCell* is not configured:

- the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2.

when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
- if there are multiple such cells, the cell has the highest rank among them.
- the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2 if the current serving cell is among them.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

If the $T_{\text{reselection}}$ timer has a non-zero value and an intra-frequency cell satisfies the reselection criteria defined in TS38.304 [1], the UE shall evaluate this intra-frequency cell for the $T_{\text{reselection}}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect to this cell.

For UE neither configured with *highSpeedMeasFlag-r16* nor *highSpeedMeasFlagFR2-r17*, $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ are specified in Table 4.2.2.3-1. For UE configured with *highSpeedMeasFlag-r16*, $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ are specified in Table 4.2.2.3-2. For FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*, $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ are specified in Table 4.2.2.3-3.

For a UE configured with *highSpeedMeasFlag-r16*, and configured with relaxed measurement criterion (*lowMobilityEvaluation* or both *lowMobilityEvaluation* and *cellEdgeEvaluation*),

- if the relaxed measurement criteria in section 4.2.2.9.2 are fulfilled, it is up to UE implementation whether to apply the relaxed measurements requirements specified in clause 4.2.2.9.2 or high speed requirements specified in this clause
- otherwise, high speed requirements specified in this clause shall be applied.

For UE not configured with *eDRX_IDLE* cycle, $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ are specified in Table 4.2.2.3-1, 4.2.2.3-2 and 4.2.2.3-3.

For UE configured with *eDRX_IDLE* cycle, $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ are specified in Table 4.2.2.3-4 and Table 4.2.2.3-5 for FR1 and FR2 respectively, where the requirements apply provided that the serving cell is configured with *eDRX_IDLE* and the DRX cycle length is same in all PTWs during any of $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ when multiple PTWs are used.

The requirements in Table 4.2.2.3-2 apply only when the UE supports *measurementEnhancement-r16* or *intraNR-MeasurementEnhancement-r16*. For UE neither supporting *measurementEnhancement-r16* nor *intraNR-MeasurementEnhancement-r16*, the UE is not required to meet the requirements specified in Table 4.2.2.3-2.

Table 4.2.2.3-1: $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$

DRX cycle length [s]	Scaling Factor (N1)	$T_{\text{detect,NR_Intra}}$ [s] (number of DRX cycles)	$T_{\text{measure,NR_Intra}}$ [s] (number of DRX cycles)	$T_{\text{evaluate,NR_Intra}}$ [s] (number of DRX cycles)

	FR1	FR2-1 ^{Note1}	FR2-2 ^{Note2}			
0.32	1	8	12	11.52 x N1 x M2 (36 x N1 x M2)	1.28 x N1 x M2 (4 x N1 x M2)	5.12 x N1 x M2 (16 x N1 x M2)
0.64		5	8	17.92 x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		4	6	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		3	5	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
Note 1: Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.						
Note 2: Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.						
Note 3: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer T _{detect, NR intra} is expected.						

Table 4.2.2.3-2: $T_{\text{detect, NR_Intra}}$, $T_{\text{measure, NR_Intra}}$ and $T_{\text{evaluate, NR_Intra}}$ for UE configured with *highSpeedMeasFlag-r16* (Frequency range FR1)

DRX cycle length [s]	$T_{\text{detect, NR_Intra}}$ [s] (number of DRX cycles)	$T_{\text{measure, NR_Intra}}$ [s] (number of DRX cycles)	$T_{\text{evaluate, NR_Intra}}$ [s] (number of DRX cycles)
0.32	$2.56 \times M2$ (8 x M2)	$0.32 \times M3$ (1 x M3)	$0.96 \times M4$ (3 x M4)
0.64	5.12 (8)	0.64 (1)	1.92 (3)
1.28	8.96 (7)	1.28 (1)	3.84 (3)
2.56	58.88 (23)	2.56 (1)	7.68 (3)
Note 1: When $\text{SMTC} \leq 40$ ms, $M2 = M3 = M4 = 1$; and when $\text{SMTC} > 40$ ms, $M2 = 1.5$, $M3 = M4 = 2$ Note 2: When <i>highSpeedMeasFlag-r16</i> is configured, the requirements apply only to UE supporting either <i>measurementEnhancement-r16</i> or <i>intraNR-MeasurementEnhancement-r16</i> .			

Table 4.2.2.3-3: $T_{\text{detect, NR_Intra}}$, $T_{\text{measure, NR_Intra}}$ and $T_{\text{evaluate, NR_Intra}}$ for UE configured with *highSpeedMeasFlagFR2-r17* (Frequency range FR2)

DRX cycle length [s]	Scaling Factor (N1)	$T_{\text{detect, NR_Intra}}$ [s] (number of DRX cycles)	$T_{\text{measure, NR_Intra}}$ [s] (number of DRX cycles)	$T_{\text{evaluate, NR_Intra}}$ [s] (number of DRX cycles)
0.32	$N2^{\text{Note2}}$	$2.56 \times N1 \times M2$ (8 x N1 x M2)	$0.32 \times N1 \times M3$ (1 x N1 x M3)	$0.96 \times N1 \times M4$ (3 x N1 x M4)
0.64	5	$17.92 \times N1$ (28 x N1)	$1.28 \times N1$ (2 x N1)	$5.12 \times N1$ (8 x N1)
1.28	4	$32 \times N1$ (25 x N1)	$1.28 \times N1$ (1 x N1)	$6.4 \times N1$ (5 x N1)
2.56	3	$58.88 \times N1$ (23 x N1)	$2.56 \times N1$ (1 x N1)	$7.68 \times N1$ (3 x N1)
Note 1: When $\text{SMTC} \leq 40$ ms, $M2 = M3 = M4 = 1$; and when $\text{SMTC} > 40$ ms, $M2 = 1.5$, $M3 = M4 = 2$ Note 2: $N2 = 2$ when <i>highSpeedMeasFlagFR2-r17</i> = set1; $N2 = 6$ when <i>highSpeedMeasFlagFR2-r17</i> = set2.				

Table 4.2.2.3-4: $T_{\text{detect, NR_Intra}}$, $T_{\text{measure, NR_Intra}}$ and $T_{\text{evaluate, NR_Intra}}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{\text{detect, NR_Intra}}$ [s] (number of DRX cycles or eDRX cycles ^{Note 3})	$T_{\text{measure, NR_Intra}}$ [s] (number of DRX cycles or eDRX cycles ^{Note 3})	$T_{\text{evaluate, NR_Intra}}$ [s] (number of DRX cycles or eDRX cycles ^{Note 3})

2.56	-	-	58.88 (23)	2.56 (1)	7.68 (3)
5.12	-	-	117.76 (23)	5.12 (1)	10.24 (2)
10.24	-	-	235.52 (23)	10.24 (1)	20.48 (2)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥1.28 ([1])	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ (23)	0.32 x M2 (1 x M2)	0.64 x M2 (2 x M2)
	0.64	≥1.28 (1)		0.64 (1)	1.28 (2)
	1.28	≥2.56 ([2])		1.28 (1)	2.56 (2)
	2.56	≥5.12 (4)		2.56 (1)	5.12 (2)
Note 1: The number of DRX cycles in this table corresponds to the DRX cycles within PTWs when PTW is configured.					
Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].					
Note 3: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles.					
Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Intra} \times DRX_cycle}{1.28} \right\rceil * 1.28$.					
Note 5: M2 = 2 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.					

Table 4.2.2.3-5: T_{detect,NR_Intra} , $T_{measure,NR_Intra}$ and $T_{evaluate,NR_Intra}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	T _{detect,NR_Intra} [s] (number of DRX cycles or eDRX cycles Note 4)	T _{measure,NR_Intra} [s] (number of DRX cycles or eDRX cycles Note 4)	T _{evaluate,NR_Intra} [s] (number of DRX cycles or eDRX cycles Note 4)
2.56	-	-	3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
5.12	-	-	3	117.76 x N1 (23 x N1)	5.12 x N1 (1 x N1)	10.24 x N1 (2 x N1)
10.24	-	-	3	235.52 x N1 (23 x N1)	10.24 x N1 (1 x N1)	20.48 x N1 (2 x N1)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥5.12 (4)	8	$eDRX_cycle_length$ $\times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1)	0.32 x N1 (1 x N1)	0.64 x N1 (2 x N1)
	0.64	≥6.4 (5)	5		0.64 x N1 (1 x N1)	1.28 x N1 (2 x N1)
	1.28	≥10.24 (8)	4		1.28 x N1 (1 x N1)	2.56 x N1 (2 x N1)
	2.56	≥15.36 (12)	3		2.56 x N1 (1 x N1)	5.12 x N1 (2 x N1)
NOTE 1: Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.						
NOTE 2: The number of DRX cycles in this table corresponds to the DRX cycles within PTWs when PTW is configured.						
NOTE 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].						
NOTE 4: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles.						
NOTE 5: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Intra} \times DRX_cycle}{1.28} \right\rceil * 1.28$.						
NOTE 6: When eDRX=20.48s and DRX=0.32s, UE is allowed to perform cell evaluation within PTW in every 2 eDRX cycles.						

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the

second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

4.2.2.4 Measurements of inter-frequency NR cells

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP or SS-RSRQ measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$ then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7.

If $S_{rxlev} \leq S_{nonIntraSearchP}$ or $S_{qual} \leq S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-frequency layers of higher, equal, or lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below in this clause.

For a UE configured with *highSpeedMeasInterFreq-r17*, and configured with relaxed measurement criterion (*lowMobilityEvaluation* or both *lowMobilityEvaluation* and *cellEdgeEvaluation*),

- if the relaxed measurement criteria in section 4.2.2.9.2 are fulfilled, it is up to UE implementation whether to apply the relaxed measurements requirements specified in clause 4.2.2.10.2 or high speed requirements specified in this clause
- otherwise, high speed requirements specified in this clause shall be applied

The UE shall be able to evaluate whether a newly detectable inter-frequency cell meets the reselection criteria defined in TS38.304 [1] within $K_{carrier} * T_{detect,NR_Inter} + K_{carrier_HST} * T_{detect,NR_Inter_HST}$ if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when $T_{reselection} = 0$ provided that the reselection criteria is met by a margin of at least 5 dB in FR1 or 6.5dB in FR2 for reselections based on ranking or 6dB in FR1 or 7.5dB in FR2 for SS-RSRP reselections based on absolute priorities or 4dB in FR1 and 4dB in FR2 for SS-RSRQ reselections based on absolute priorities.

The parameter $K_{carrier}$ is the number of NR inter-frequency carriers which are not configured with *highSpeedMeasInterFreq-r17* for FR1 indicated by the serving cell. The parameter $K_{carrier_HST}$ is the number of NR inter-frequency carriers which are configured with *highSpeedMeasInterFreq-r17* for FR1 indicated by the serving cell. The parameter $K_{carrier}$ for a UE configured with idle mode CA measurements (while T331 is running), is the combined number of NR inter-frequency carriers indicated by the serving cell and the number of NR inter-frequency carriers configured for idle mode CA measurements which are not configured with *highSpeedMeasInterFreq-r17* for FR1. The parameter $K_{carrier_HST}$ for a UE configured with idle mode CA measurements (while T331 is running), is the combined number of NR inter-frequency carriers indicated by the serving cell and the number of NR inter-frequency carriers configured for idle mode CA measurements which are configured with *highSpeedMeasInterFreq-r17* for FR1.

Note: combined total number means that if a carrier is an inter-frequency carrier indicated by the serving cell for mobility and additionally a carrier configured for idle mode CA measurements, it only counts as one carrier.

An inter-frequency cell is considered to be detectable according to the conditions defined in Annex B.1.3 for a corresponding Band.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,NR_Inter}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

A UE not configured with eDRX_IDLE cycle shall measure SS-RSRP or SS-RSRQ at least every $K_{carrier} * T_{measure,NR_Inter} + K_{carrier_HST} * T_{measure,NR_Inter_HST}$ (see table 4.2.2.4-1 and table 4.2.2.4-2 if UE declares support of idle mode inter-frequency measurement enhancement when configured with *highSpeedMeasInterFreq-r17* for FR1, otherwise see table 4.2.2.4-1 only) for identified lower or equal priority inter-frequency cells. If the UE detects on a NR

carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

A UE not configured with eDRX_IDLE cycle shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{\text{measure,NR_Inter}}/2$ for carriers which are not configured with *highSpeedMeasInterFreq-r17* for FR1 or $T_{\text{measure,NR_Inter_HST}}/2$ for carriers which are configured with *highSpeedMeasInterFreq-r17* for FR1.

A UE configured with eDRX_IDLE cycle shall measure SS-RSRP or SS-RSRQ at least every $K_{\text{carrier}} * T_{\text{measure,NR_Inter}}$ (see table 4.2.2.4-3 and table 4.2.2.4-4) for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

A UE is configured with eDRX_IDLE cycle shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{\text{measure,NR_Inter}}/2$.

The UE shall not consider a NR neighbour cell in cell reselection if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE not configured with eDRX_IDLE cycle shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 [1] within $K_{\text{carrier}} * T_{\text{evaluate,NR_Inter}} + K_{\text{carrier_HST}} * T_{\text{evaluate,NR_Inter_HST}}$ when $T_{\text{reselection}} = 0$ as specified in table 4.2.2.4-1 and table 4.2.2.4-2 if UE declares support of idle mode inter-frequency measurement enhancement when configured with *highSpeedMeasInterFreq-r17* for FR1, otherwise see table 4.2.2.4-1 only, provided that the reselection criteria is met by

- the condition when performing equal priority reselection and
 - when *rangeToBestCell* is not configured:
 - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2.
 - when *rangeToBestCell* is configured:
 - the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
 - if there are multiple such cells, the cell has the highest rank among them
 - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 if the current serving cell is among them. or
- 6dB in FR1 or 7.5dB in FR2 for SS-RSRP reselections based on absolute priorities or
- 4dB in FR1 or 4dB in FR2 for SS-RSRQ reselections based on absolute priorities.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE configured with eDRX_IDLE cycle shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 [1] within $K_{\text{carrier}} * T_{\text{evaluate,NR_Inter}}$ when $T_{\text{reselection}} = 0$ as specified in table 4.2.2.4-3 and table 4.2.2.4-4, provided that the reselection criteria is met by

- the condition when performing equal priority reselection and
 - when *rangeToBestCell* is not configured:
 - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 or.
 - when *rangeToBestCell* is configured:
 - the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.

- if there are multiple such cells, the cell has the highest rank among them
- the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 if the current serving cell is among them. or
- 6dB in FR1 or 7.5dB in FR2 for SS-RSRP reselections based on absolute priorities or
- 4dB in FR1 or 4dB in FR2 for SS-RSRQ reselections based on absolute priorities.

When evaluating cells for reselection, the SSB side conditions apply to both serving and inter-frequency cells.

If the $T_{\text{reselection}}$ timer has a non-zero value and the inter-frequency cell satisfies the reselection criteria, the UE shall evaluate this inter-frequency cell for the $T_{\text{reselection}}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect to this cell.

The UE is not expected to meet the measurement requirements for an inter-frequency carrier under DRX cycle=320 ms defined in Table 4.2.2.4-1 and Table 4.2.2.4-2 under the following conditions:

- $T_{\text{SMTC_intra}} = T_{\text{SMTC_inter}} = 160$ ms; where
- $T_{\text{SMTC_intra}}$ is the periodicity of the SMTC configured for the intra-frequency carrier if no identified intra-frequency cell is in the PCI list of *smtc2-LP* on this intra-frequency carrier; $T_{\text{SMTC_intra}}$ is the periodicity of the *smtc2-LP* configured for the intra-frequency carrier if at least one identified intra-frequency cell is in the PCI list of *smtc2-LP* on this intra-frequency carrier. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed for $T_{\text{SMTC_intra}}$. If the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{\text{detect, NR_intra}}$ is expected.
- $T_{\text{SMTC_inter}}$ is the actual SMTC periodicity used by the inter-frequency cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the inter-frequency carrier is assumed for $T_{\text{SMTC_inter}}$. If the actual SSB transmission periodicity is greater than the SMTC configured for the inter-frequency carrier, longer $T_{\text{detect, NR_inter}}$ is expected.
- SMTC occasions configured for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the SMTC occasions configured for the intra-frequency carrier, and
- SMTC occasions configured for the intra-frequency carrier and for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the paging occasion in TS38.304 [1].

For UE not configured with eDRX_IDLE cycle, $T_{\text{detect, NR_Inter}}$, $T_{\text{measure, NR_Inter}}$ and $T_{\text{evaluate, NR_Inter}}$ are specified in Table 4.2.2.4.1-1 and 4.2.2.4.1-2.

For UE configured with eDRX_IDLE cycle, $T_{\text{detect, NR_Inter}}$, $T_{\text{measure, NR_Inter}}$ and $T_{\text{evaluate, NR_Inter}}$ are specified in Table 4.2.2.4-3 and Table 4.2.2.4-4 for FR1 and FR2 respectively. The requirements apply provided that the serving cell is configured with eDRX_IDLE and the DRX cycle length is same in all PTWs during any of $T_{\text{detect, NR_Inter}}$, $T_{\text{measure, NR_Inter}}$ and $T_{\text{evaluate, NR_Inter}}$ when multiple PTWs are used.

Table 4.2.2.4-1: $T_{\text{detect, NR_Inter}}$, $T_{\text{measure, NR_Inter}}$ and $T_{\text{evaluate, NR_Inter}}$

DRX cycle length [s]	Scaling Factor (N1)			T _{detect,NR_Inter} [s] (number of DRX cycles)	T _{measure,NR_Inter} [s] (number of DRX cycles)	T _{evaluate,NR_Inter} [s] (number of DRX cycles)
	FR1	FR2-1 ^{Note1}	FR2-2 ^{Note2}			
0.32	1	8	12	11.52 x N1 x 1.5 (36 x N1 x 1.5)	1.28 x N1 x 1.5 (4 x N1 x 1.5)	5.12 x N1 x 1.5 (16 x N1 x 1.5)
0.64		5	8	17.92x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		4	6	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		3	5	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
Note 1:	Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.					
Note 2:	Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.					

Table 4.2.2.4-2: $T_{\text{detect,NR_Inter_HST}}$, $T_{\text{measure,NR_Inter_HST}}$ and $T_{\text{evaluate,NR_Inter_HST}}$ for FR1 configured with *highSpeedMeasInterFreq-r17* ^{note2}

DRX cycle length [s]	$T_{\text{detect,NR_Inter_HST}}$ [s] (number of DRX cycles)	$T_{\text{measure,NR_Inter_HST}}$ [s] (number of DRX cycles)	$T_{\text{evaluate,NR_Inter_HST}}$ [s] (number of DRX cycles)
0.32	$3.2 \times M2$ ($10 \times M2$) ^{Note 1}	$0.32 \times M3$ ($[1] \times M3$) ^{Note 1}	$0.96 \times M4$ ($3 \times M4$) ^{Note 1}
0.64	6.4 (10)	0.64 (1)	1.92 (3)
1.28	10.24 (8)	1.28 (1)	3.84 (3)
2.56	58.88 (23)	2.56 (1)	7.68 (3)
Note 1: When SMTC <= 40 ms, $M2 = M3 = M4 = 1$; and when SMTC > 40 ms, $M2 = 1.5$, $M3 = M4 = 2$			
Note 2: The support of HST Idle mode inter-frequency measurement enhancement is optional without capability signalling. The requirements apply to UE that declares support of IDLE mode inter-frequency measurement enhancement for HST in FR1, otherwise Table 4.2.2.4-1 shall be used.			

Table 4.2.2.4-3: $T_{\text{detect,NR_Inter}}$, $T_{\text{measure,NR_Inter}}$ and $T_{\text{evaluate,NR_Inter}}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	T _{detect,NR_Inter} [s] (number of DRX cycles or eDRX cycles Note 3)	T _{measure,NR_Inter} [s] (number of DRX cycles or eDRX cycles Note 3)	T _{evaluate,NR_Inter} [s] (number of DRX cycles or eDRX cycles Note 3)
2.56	-	-	58.88 (23)	2.56 (1)	7.68 (3)
5.12	-	-	117.76 (23)	5.12 (1)	10.24 (2)
10.24	-	-	235.52 (23)	10.24 (1)	20.48 (2)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥1.28 (1)	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ (23)	0.32 x 1.5 (1 x 1.5)	0.64 x 1.5 (2 x 1.5)
	0.64	≥1.28 (1)		0.64 (1)	1.28 (2)
	1.28	≥2.56 (2)		1.28 (1)	2.56 (2)
	2.56	≥5.12 (4)		2.56 (1)	5.12 (2)
NOTE 1: The number of DRX cycles in this table corresponds to the DRX cycles within PTWs when PTW is configured.					
NOTE 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [34].					
NOTE 3: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles.					
NOTE 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Inter} \times DRX_cycle}{1.28} \right\rceil * 1.28$.					

Table 4.2.2.4-4: $T_{\text{detect,NR_Inter}}$, $T_{\text{measure,NR_Inter}}$ and $T_{\text{evaluate,NR_Inter}}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) ^{Note1}	$T_{\text{detect,NR_Inter}}$ [s] (number of DRX cycles or eDRX cycles ^{Note 3})	$T_{\text{measure,NR_Inter}}$ [s] (number of DRX cycles or eDRX cycles ^{Note 3})	$T_{\text{evaluate,NR_Inter}}$ [s] (number of DRX cycles or eDRX cycles ^{Note 3})
2.56	-	-	3	$58.88 \times N1$ (23 x N1)	$2.56 \times N1$ (1 x N1)	$7.68 \times N1$ (3 x N1)

5.12	-	-	3	117.76 x N1 (23 x N1)	5.12 x N1 (1 x N1)	10.24 x N1 (2 x N1)
10.24	-	-	3	235.52 x N1 (23 x N1)	10.24 x N1 (1 x N1)	20.48 x N1 (2 x N1)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥5.12 (4)	8	$eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1)	0.32 x N1 (1 x N1)	0.64 x N1 (2 x N1)
	0.64	≥6.4 (5)	5		0.64 x N1 (1 x N1)	1.28 x N1 (2 x N1)
	1.28	≥10.24 (8)	4		1.28 x N1 (1 x N1)	2.56 x N1 (2 x N1)
	2.56	≥15.36 (12)	3		2.56 x N1 (1 x N1)	5.12 x N1 (2 x N1)
NOTE 1: Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.						
NOTE 2: The number of DRX cycles in this table corresponds to the DRX cycles within PTWs when PTW is configured.						
NOTE 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].						
NOTE 4: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles.						
NOTE 5: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Inter} \times DRX_cycle}{1.28} \right\rceil \times 1.28$.						
NOTE 6: When eDRX=20.48s and DRX=0.32s, UE is allowed to perform cell evaluation within PTW in every 2 eDRX cycles.						

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

4.2.2.5 Measurements of inter-RAT E-UTRAN cells

If $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$ then the UE shall search for inter-RAT E-UTRAN layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.

If $S_{rxlev} \leq S_{nonIntraSearchP}$ or $S_{qual} \leq S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-RAT E-UTRAN layers of higher, lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority inter-RAT E-UTRAN layers shall be the same as that defined below for lower priority RATs.

The requirements in this clause apply to inter-RAT E-UTRAN FDD measurements and E-UTRA TDD measurements. When the measurement rules indicate that inter-RAT E-UTRAN cells are to be measured, the UE shall measure RSRP and RSRQ of detected E-UTRA cells in the neighbour frequency list at the minimum measurement rate specified in this clause.

The parameter $N_{EUTRA_carrier}$ is the total number of configured E-UTRA carriers indicated to meet non high-speed requirements in the neighbour frequency list. The parameter $N_{EUTRA_carrier_HST}$ is the total number of configured E-UTRA carriers indicated to meet high speed requirements in the neighbour frequency list. If $S_{rxlev} \leq S_{nonIntraSearchP}$ or $S_{qual} \leq S_{nonIntraSearchQ}$, an inter-RAT E-UTRAN layer is indicated to meet high speed requirements if *highSpeedMeasFlag-r16* is configured and the carrier to be measured is configured with *highSpeedEUTRACarrier-r16* and UE supports the enhanced inter-RAT E-UTRAN measurement requirements. If $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$, UE is required to meet non high-speed requirements no matter whether *highSpeedMeasFlag-r16* or *highSpeedEUTRACarrier-r16* is configured or not.

For a UE configured with *highSpeedMeasFlag-r16*, and configured with relaxed measurement criterion (*lowMobilityEvaluation* or both *lowMobilityEvaluation* and *cellEdgeEvaluation*),

- if the relaxed measurement criteria in section 4.2.2.9.2 are fulfilled, it is up to UE implementation whether to apply the relaxed measurements requirements specified in clause 4.2.2.11.2 or high speed requirements specified in this clause

- otherwise, high speed requirements specified in this clause shall be applied

The parameter $N_{\text{EUTRA_carrier}}$ for a UE configured with idle mode DC measurements (while T331 is running), is the combined number of configured E-UTRA carriers in the neighbour frequency list and E-UTRA carriers configured for idle mode DC measurements, excluding the configured E-UTRA carriers indicated to meet high speed requirements in the neighbour frequency list.

Note: combined total number means that if a carrier is an E-UTRA carrier indicated by the serving cell for mobility and additionally a carrier configured for idle mode CA/DC measurements, it only counts as one carrier.

The UE shall filter RSRP and RSRQ measurements of each measured E-UTRA cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least half the minimum specified measurement period.

An inter-RAT E-UTRA cell is considered to be detectable provided the following conditions are fulfilled:

- the same conditions as for inter-frequency RSRP measurements specified in TS 36.133 [15, Annex B.1.2] are fulfilled for a corresponding Band, and
- the same conditions as for inter-frequency RSRQ measurements specified in TS 36.133 [15, Annex B.1.2] are fulfilled for a corresponding Band.
- SCH conditions specified in TS 36.133 [15, Annex B.1.2] are fulfilled for a corresponding Band

The UE shall be able to evaluate whether a newly detectable inter-RAT E-UTRAN cell meets the reselection criteria defined in TS38.304 [1] within $N_{\text{EUTRA_carrier_HST}} * T_{\text{detect,EUTRAN_HST}} + N_{\text{EUTRA_carrier}} * T_{\text{detect,EUTRAN}}$ when $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$ when $T_{\text{reselection}} = 0$ provided that the reselection criteria is met by a margin of at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities.

Cells which have been detected shall be measured at least every $N_{\text{EUTRA_carrier_HST}} * T_{\text{measure,EUTRAN_HST}} + N_{\text{EUTRA_carrier}} * T_{\text{measure,EUTRAN}}$ when $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{\text{measure,EUTRAN}}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell.

If the UE detects on an inter-RAT E-UTRAN carrier, a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall not consider an inter-RAT E-UTRA cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For a cell that has been already detected, but has not been reselected to, the filtering shall be such that a UE not configured with eDRX_IDLE cycle shall be capable of evaluating that an already identified inter-RAT E-UTRA cell has met reselection criterion defined in TS 38.304 [1] within $N_{\text{EUTRA_carrier_HST}} * T_{\text{evaluate,EUTRAN_HST}} + N_{\text{EUTRA_carrier}} * T_{\text{evaluate,EUTRAN}}$ when $T_{\text{reselection}} = 0$ as specified in table 4.2.2.5-1 and 4.2.2.5-2 provided that the reselection criteria is met by a margin of at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities.

For a cell that has been already detected, but has not been reselected to, the filtering shall be such that the UE configured with eDRX_IDLE cycle shall be capable of evaluating that an already identified inter-RAT E-UTRA cell has met reselection criterion defined in TS 38.304 [1] within $N_{\text{EUTRA_carrier}} * T_{\text{evaluate,EUTRAN}}$ when $T_{\text{reselection}} = 0$ as specified in table 4.2.2.5-3 provided that the reselection criteria is met by a margin of at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities.

If the $T_{\text{reselection}}$ timer has a non-zero value and an inter-RAT E-UTRA cell satisfies with the reselection criteria defined in TS 38.304 [1], the UE shall evaluate this E-UTRA cell for the $T_{\text{reselection}}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect to this cell.

For UE not configured with eDRX_IDLE cycle, $T_{\text{detect,EUTRAN}}$, $T_{\text{measure,EUTRAN}}$ and $T_{\text{evaluate, E-UTRAN}}$ are specified in Table 4.2.2.5-1 and . 4.2.2.5-2

For UE configured with eDRX_IDLE cycle, $T_{\text{detect,EUTRAN}}$, $T_{\text{measure,EUTRAN}}$ and $T_{\text{evaluate,E-UTRAN}}$ are specified in Table 4.2.2.5-3, where the requirements apply provided that the serving cell is configured with eDRX_IDLE and the DRX cycle length is the same in all PTWs during any of $T_{\text{detect,EUTRAN}}$, $T_{\text{measure,EUTRAN}}$ and $T_{\text{evaluate,E-UTRAN}}$ when multiple PTWs are used.

Table 4.2.2.5-1: $T_{\text{detect,EUTRAN}}$, $T_{\text{measure,EUTRAN}}$, and $T_{\text{evaluate,EUTRAN}}$

DRX cycle length [s]	$T_{\text{detect,EUTRAN}}$ [s] (number of DRX cycles)	$T_{\text{measure,EUTRAN}}$ [s] (number of DRX cycles)	$T_{\text{evaluate,EUTRAN}}$ [s] (number of DRX cycles)
0.32	11.52 (36)	1.28 (4)	5.12 (16)
0.64	17.92 (28)	1.28 (2)	5.12 (8)
1.28	32(25)	1.28 (1)	6.4 (5)
2.56	58.88 (23)	2.56 (1)	7.68 (3)

Table 4.2.2.5-2: $T_{\text{detect,EUTRAN_HST}}$, $T_{\text{measure,EUTRAN_HST}}$, and $T_{\text{evaluate,EUTRAN_HST}}$ for UE configured with highSpeedMeasFlag-r16

DRX cycle length [s]	$T_{\text{detect,EUTRAN_HST}}$ [s] (number of DRX cycles)	$T_{\text{measure,EUTRAN_HST}}$ [s] (number of DRX cycles)	$T_{\text{evaluate,EUTRAN_HST}}$ [s] (number of DRX cycles)
0.32	4.16 (13)	0.64 (2)	0.96 (3)
0.64	7.68 (12)	1.28 (2)	1.92 (3)
1.28	8.96 (7)	1.28 (1)	3.84 (3)
2.56	58.88 (23)	2.56 (1)	7.68 (3)
Note 1: When highSpeedMeasFlag-r16 is configured, the requirements apply only to UE supporting either <i>measurementEnhancement-r16</i> or <i>interRAT-MeasurementEnhancement-r16</i> .			

The requirements in Table 4.2.2.5-2 apply only when the UE supports *measurementEnhancement-r16* or *interRAT-MeasurementEnhancement-r16*. For UE not supporting either *measurementEnhancement-r16* or *interRAT-MeasurementEnhancement-r16*, the UE is not required to meet the requirements specified in Table 4.2.2.5-2.

Table 4.2.2.5-3: $T_{\text{detect,EUTRAN}}$, $T_{\text{measure,EUTRAN}}$, and $T_{\text{evaluate,EUTRAN}}$ for UE configured with eDRX_IDLE cycle

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{\text{detect,EUTRAN}}$ [s] (number of DRX or eDRX cycles ^{Note 3})	$T_{\text{measure,EUTRAN}}$ [s] (number of DRX or eDRX cycles ^{Note 3})	$T_{\text{evaluate,E-UTRAN}}$ [s] (number of DRX or eDRX cycles ^{Note 3})
2.56	N/A	N/A	58.88 (23)	2.56 (1)	7.68 (3)
5.12	N/A	N/A	117.76 (23)	5.12 (1)	10.24 (2)
10.24	N/A	N/A	235.52 (23)	10.24 (1)	20.48 (2)
$20.48 \leq \text{eDRX_IDLE cycle length} \leq 10485.76$	0.32	≥ 1.28 (1)	$\text{eDRX_cycle_length} \times \left\lceil \frac{23}{\text{PTW} / \text{DRX_cycle_length}} \right\rceil$ (23)	0.32 (1)	0.64 (2)
	0.64	≥ 1.28 (1)		0.64 (1)	1.28 (2)
	1.28	≥ 2.56 (2)		1.28 (1)	2.56 (2)
	2.56	≥ 5.12 (4)		2.56 (1)	5.12 (2)

NOTE 1:	The number of DRX cycles in this table corresponds to the DRX cycles within PTWs when PTW is configured..
NOTE 2:	The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].
NOTE 3:	Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s, and 10.24s; number of DRX cycles otherwise.
NOTE 4:	The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,E-UTRAN}} \cdot \text{DRX_cycle}}{1.28} \right\rceil \cdot 1.28$.
NOTE 5:	When eDRX=20.48s and DRX=0.32s, UE is allowed to perform cell evaluation within PTW in every 2 eDRX cycles.

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

4.2.2.6 Maximum interruption in paging reception

UE shall perform the cell re-selection with minimum interruption in monitoring downlink channels for paging reception. In addition, when the UE is configured with eDRX_IDLE cycle, the UE shall not miss any paging in a PTW provided the paging is sent in at least 2 DRX cycles before the end of that PTW.

At intra-frequency and inter-frequency cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels of the target intra-frequency and inter-frequency cell for paging reception. The interruption time shall not exceed $T_{\text{SI-NR}} + 2 \cdot T_{\text{target_cell_SMTC_period}}$ ms. $T_{\text{target_cell_SMTC_period}}$ is the periodicity of the SMTC occasions configured for the target NR cell. If the target cell is in the PCI list of *smtc2-LP*, the SMTC periodicity follows *smtc2-LP*; otherwise, the SMTC periodicity follows *smtc*.

At inter-RAT cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels for paging reception of the target inter-RAT cell. For NR to E-UTRAN cell re-selection the interruption time must not exceed $T_{\text{SI-EUTRA}} + 55$ ms.

$T_{\text{SI-NR}}$ is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [2] for an NR cell.

$T_{\text{SI-EUTRA}}$ is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 36.331 [16] for an E-UTRAN cell.

These requirements assume sufficient radio conditions, so that decoding of system information can be made without errors and does not take into account cell re-selection failure.

4.2.2.7 General requirements

When configured with eDRX_IDLE, the UE shall search every layer of higher priority at least every $T_{\text{higher_priority_search}}$, where $T_{\text{higher_priority_search}}$ is defined as follows:

- $T_{\text{higher_priority_search}} = \max(60, 15 \cdot \text{eDRX_IDLE cycle length}) \cdot N_{\text{layers}}$ seconds if eDRX_IDLE cycle ≤ 10.24 s,
- $T_{\text{higher_priority_search}} = \max(60, \text{ceil}(15/N_{\text{DRX-PTW}}) \cdot \text{eDRX_IDLE cycle length}) \cdot N_{\text{layers}}$ seconds if eDRX_IDLE cycle > 10.24 s, where $N_{\text{DRX-PTW}}$ is the number of DRX cycles within a single PTW.

Otherwise if the UE is not configured with eDRX_IDLE cycle, the UE shall search every layer of higher priority at least every $T_{\text{higher_priority_search}} = (60 \cdot N_{\text{layers}})$ seconds.

N_{layers} is the total number of higher priority NR and E-UTRA carrier frequencies broadcasted in system information.

For a UE configured with early measurement reporting, while T331 is running, N_{layers} is the combined total number of higher priority NR and E-UTRA carrier frequencies broadcasted in system information and carriers configured for idle mode CA measurements.

Note: combined total number means that if a carrier is a high priority carrier and additionally a carrier configured for idle mode CA measurements, it only counts as one carrier.

4.2.2.8 Minimum requirement at transitions

When switching from low mobility scenario or not-at-cell-edge scenario to low mobility and not-at-cell-edge scenario during cell-reselection period, the UE shall fulfill the requirements corresponding to low mobility scenario or not-at-cell-edge scenario over measurement period (T_{relaxed}) and thereafter switch to requirements corresponding to low mobility and not-at-cell-edge scenario. The measurement period, T_{relaxed} , is any of:

- $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$, defined in section 4.2.2.9 for intra-frequency measurements on NR cells,
- $T_{\text{measure,NR_Inter}}$ and $T_{\text{evaluate,NR_Inter}}$ defined in section 4.2.2.10 for inter-frequency measurements on NR cells and
- $T_{\text{measure,EUTRAN}}$ and $T_{\text{evaluate,EUTRAN}}$ defined in sections 4.2.2.11 for inter-RAT E-UTRAN measurements.

When switching from low mobility and not-at-cell-edge scenario to low mobility scenario or not-at-cell-edge scenario during cell-reselection period, the UE shall fulfill the requirements corresponding to low mobility scenario or not-at-cell-edge scenario upon fulfilling the switching criteria.

When switching from normal mode to low mobility scenario or not-at-cell-edge scenario or low mobility and not-at-cell-edge scenario during cell-reselection period, the UE shall fulfill the requirements corresponding to normal mode over measurement period (T_{normal}) and thereafter switch to requirements corresponding to low mobility scenario or not-at-cell-edge scenario or low mobility and not-at-cell-edge scenario. The measurement period, T_{normal} , is any of:

- $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$, defined in section 4.2.2.3 for intra-frequency measurements on NR cells,
- $T_{\text{measure,NR_Inter}}$ and $T_{\text{evaluate,NR_Inter}}$ defined in section 4.2.2.4 for inter-frequency measurements on NR cells and
- $T_{\text{measure,EUTRAN}}$ and $T_{\text{evaluate,EUTRAN}}$ defined in sections 4.2.2.5 for inter-RAT E-UTRAN measurements.

When switching from low mobility scenario or not-at-cell-edge scenario or low mobility and not-at-cell-edge scenario to normal mode during cell-reselection period, the UE shall fulfill the requirements corresponding to normal mode upon fulfilling the switching criteria.

No requirement is defined for multiple transitions of scenarios within one measurement period.

4.2.2.9 Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion

4.2.2.9.1 Introduction

This clause contains the requirements for measurements on intra-frequency NR cells when $S_{\text{rxlev}} \leq S_{\text{IntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{IntraSearchQ}}$ and when the UE is configured any of the following relaxed measurement criteria:

- Relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in [1],
- Relaxed measurement criterion for UE not-at-cell edge defined in clause 5.2.4.9.2 in [1],
- Both low mobility criterion and not-at-cell edge criterion as defined in clauses 5.2.4.9.1 and 5.2.4.9.2 in [1] respectively.

4.2.2.9.2 Measurements for UE fulfilling low mobility criterion

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is only configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled the *lowMobilityEvaluation* [2] criterion, or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] is not configured, and UE has fulfilled only the *lowMobilityEvaluation* [2] criterion.

The requirements defined in clause 4.2.2.3 apply for this clause except that:

- For a UE not configured with *eDRX_IDLE*, $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ are as specified in Table 4.2.2.9.2-1.

- For a UE configured with eDRX_IDLE cycle up to 10.24s, $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ are as specified in Table 4.2.2.9.2-2 and Table 4.2.2.9.2-3 for FR1 and FR2, respectively.
- For a UE configured with eDRX_IDLE cycle greater than 10.24s, $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ are as specified in Table 4.2.2.9.2-4 and Table 4.2.2.9.2-5 for FR1 and FR2, respectively, provided eDRX cycle is $\leq [163.84]$ sec and evaluation/measurement period with relaxation on one carrier is not greater than single PTW length.

Table 4.2.2.9.2-1: $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$

DRX cycle length [s]	Scaling Factor (N1)			T _{detect,NR_Intra} [s] (number of DRX cycles)	T _{measure,NR_Intra} [s] (number of DRX cycles)	T _{evaluate,NR_Intra} [s] (number of DRX cycles)
	FR1	FR2-1 Note1	FR2-2 Note2			
0.32	1	8	12	11.52 x N1 x M2 x K1 (36 x N1 x M2 x K1)	1.28 x N1 x M2 x K1 (4 x N1 x M2 x K1)	5.12 x N1 x M2 x K1 (16 x N1 x M2 x K1)
0.64		5	8	17.92 x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)
1.28		4	6	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	5	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
Note 1:	Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.					
Note 2:	Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.					
Note 3:	M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If high layer signalling <i>smtc2-LP-r16</i> is configured, for cells indicated in the <i>pci-List</i> parameter in <i>smtc2-LP-r16</i> , the SMTC periodicity corresponds to the value of higher layer parameter <i>smtc2-LP-r16</i> ; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter <i>smtc</i> .					
Note 4:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.					

Table 4.2.2.9.2-2: $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1) for eDRX_IDLE cycle upto 10.24s

eDRX_IDLE cycle length [s]	$T_{\text{detect,NR_Intra}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure,NR_Intra}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate,NR_Intra}}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times K1$ ($23 \times K1$)	$2.56 \times K1$ ($1 \times K1$)	$7.68 \times K1$ ($3 \times K1$)
5.12	$117.76 \times K1$ ($23 \times K1$)	$5.12 \times K1$ ($1 \times K1$)	$10.24 \times K1$ ($2 \times K1$)
10.24	$235.52 \times K1$ ($23 \times K1$)	$10.24 \times K1$ ($1 \times K1$)	$20.48 \times K1$ ($2 \times K1$)
Note 1: Void.			
Note 2: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.			

Table 4.2.2.9.2-3: $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2-1) for eDRX_IDLE cycle upto 10.24s

eDRX_IDLE cycle length [s]	$T_{\text{detect,NR_Intra}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure,NR_Intra}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate,NR_Intra}}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times N1 \times K1$ ($23 \times N1 \times K1$)	$2.56 \times N1 \times K1$ ($1 \times N1 \times K1$)	$7.68 \times N1 \times K1$ ($3 \times N1 \times K1$)
5.12	$117.76 \times N1 \times K1$ ($23 \times N1 \times K1$)	$5.12 \times N1 \times K1$ ($1 \times N1 \times K1$)	$10.24 \times N1 \times K1$ ($2 \times N1 \times K1$)
10.24	$235.52 \times N1 \times K1$ ($23 \times N1 \times K1$)	$10.24 \times N1 \times K1$ ($1 \times N1 \times K1$)	$20.48 \times N1 \times K1$ ($2 \times N1 \times K1$)
Note 1: For UE supporting FR2-1 power class 2&3&4, $N1 = 3$. For UE supporting FR2-1 power class 1 or 5, $N1 = 8$.			
Note 2: Void.			
Note 3: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.			

Table 4.2.2.9.2-4: $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	T _{detect,NR_Intra} [s] (number of DRX cycles ^{Note 3})	T _{measure,NR_Intra} [s] (number of DRX cycles ^{Note 3})	T _{evaluate,NR_Intra} [s] (number of DRX cycles ^{Note 3})
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥3.84 (3)	$eDRX_cycle_length$ $\times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil \times K1$ (23 x K1)	0.32 x M2 x K1 (1 x M2 x K1)	0.64 x M2 x K1 (2 x M2 x K1)
	0.64	≥3.84 (3)		0.64 x K1 (1 x K1)	1.28 x K1 (2 x K1)
	1.28	≥7.68 (6)		1.28 x K1 (1 x K1)	2.56 x K1 (2 x K1)
	2.56	≥15.36 (12)		2.56 x K1 (1 x K1)	5.12 x K1 (2 x K1)
Note 1:	The number of DRX cycles in this table corresponds to the DRX cycles within PTWs.				
Note 2:	The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].				
Note 3:	The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Intra} \times DRX_cycle}{1.28} \right\rceil \times 1.28$.				
Note 4:	M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.				
Note 5:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.				

Table 4.2.2.9.2-5: $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR2-1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) ^{Note1}	$T_{\text{detect,NR_Intra}}$ [s] (number of DRX cycles ^{Note 3})	$T_{\text{measure,NR_Intra}}$ [s] (number of DRX cycles ^{Note 3})	$T_{\text{evaluate,NR_Intra}}$ [s] (number of DRX cycles ^{Note 3})
$20.48 \leq \text{eDRX_IDLE cycle length} \leq [163.84]$	0.32	≥ 15.36 (12)	8	$K1 \times eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1 x K1)	$0.32 \times N1 \times K1$ (1 x N1 x K1)	$0.64 \times N1 \times K1$ (2 x N1 x K1)
	0.64	≥ 19.2 (15)	5		$0.64 \times N1 \times K1$ (1 x N1 x K1)	$1.28 \times N1 \times K1$ (2 x N1 x K1)
	1.28	≥ 30.72 (24)	4		$1.28 \times N1 \times K1$ (1 x N1 x K1)	$2.56 \times N1 \times K1$ (2 x N1 x K1)
	2.56	40.96 (32)	3		20.48	40.96
	0.64	≥ 19.2 (15)	5		$0.64 \times N1 \times K1$ (1 x N1 x K1)	$1.28 \times N1 \times K1$ (2 x N1 x K1)
	1.28	≥ 30.72 (24)	4		$1.28 \times N1 \times K1$ (1 x N1 x K1)	$2.56 \times N1 \times K1$ (2 x N1 x K1)
	2.56	40.96 (32)	3		20.48	40.96
Note 1: Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length. Note 2: The number of DRX cycles in this table corresponds to the DRX cycles within PTWs. Note 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39]. Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,NR_Intra}} \times \text{DRX_cycle}}{1.28} \right\rceil \times 1.28$. Note 5: The measurement shall not be performed across PTW's. In this case the measurement is performed in the next available PTW. Note 6: The evaluation shall not be performed across PTW's. Note 7: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation criterion</i> [2].						

4.2.2.9.3 Measurements for UE fulfilling not-at-cell edge criterion

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is only configured with *cellEdgeEvaluation* [2] criterion and UE has fulfilled the *cellEdgeEvaluation* [2] criterion, or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criteria and *combineRelaxedMeasCondition* [2] is not configured, and UE has fulfilled only the *cellEdgeEvaluation* [2] criterion.

The requirements defined in clause 4.2.2.3 apply for this clause except that:

- For a UE not configured with eDRX_IDLE, $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ are as specified in Table 4.2.2.9.3-1.
- For a UE configured with eDRX_IDLE cycle up to 10.24s, $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ are as specified in $T_{\text{measure,NR_Intra}}$ as specified in Table 4.2.2.9.3-2 and Table 4.2.2.9.3-3 for FR1 and FR2, respectively.
- For a UE configured with eDRX_IDLE cycle greater than 10.24s, $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ are as specified in Table 4.2.2.9.3-4 and Table 4.2.2.9.3-5 for FR1 and FR2, respectively, provided eDRX cycle is $\leq$ [163.84] sec and evaluation/measurement period with relaxation on one carrier is not greater than single PTW length.

Table 4.2.2.9.3-1: $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$

DRX cycle length [s]	Scaling Factor (N1)			T _{detect,NR_Intra} [S] (number of DRX cycles)	T _{measure,NR_Intra} [S] (number of DRX cycles)	T _{evaluate,NR_Intra} [s] (number of DRX cycles)
	FR1	FR2-1 _{Note1}	FR2-2 _{Note2}			
0.32	1	8	12	11.52 × N1 × M2 × K1 (36 × N1 × M2 × K1)	1.28 × N1 × M2 × K1 (4 × N1 × M2 × K1)	5.12 × N1 × M2 × K1 (16 × N1 × M2 × K1)
0.64		5	8	17.92 × N1 × K1 (28 × N1 × K1)	1.28 × N1 × K1 (2 × N1 × K1)	5.12 × N1 × K1 (8 × N1 × K1)
1.28		4	6	32 × N1 × K1 (25 × N1 × K1)	1.28 × N1 × K1 (1 × N1 × K1)	6.4 × N1 × K1 (5 × N1 × K1)
2.56		3	5	58.88 × N1 × K1 (23 × N1 × K1)	2.56 × N1 × K1 (1 × N1 × K1)	7.68 × N1 × K1 (3 × N1 × K1)
Note 1:	Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.					
Note 2:	Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.					
Note 3:	M2 = 1.5 if SMTc periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If high layer signalling <i>smtc2-LP-r16</i> is configured, for cells indicated in the <i>pci-List</i> parameter in <i>smtc2-LP-r16</i> , the SMTc periodicity corresponds to the value of higher layer parameter <i>smtc2-LP-r16</i> ; for the other cells, the SMTc periodicity corresponds to the value of higher layer parameter <i>smtc</i> .					
Note 4:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.					

Table 4.2.2.9.3-2: $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1) for eDRX_IDLE cycle upto 10.24s

eDRX_IDLE cycle length [s]	$T_{\text{detect,NR_Intra}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure,NR_Intra}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate,NR_Intra}}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times K1$ (23 $\times K1$)	$2.56 \times K1$ (1 $\times K1$)	$7.68 \times K1$ (3 $\times K1$)
5.12	$117.76 \times K1$ (23 $\times K1$)	$5.12 \times K1$ (1 $\times K1$)	$10.24 \times K1$ (2 $\times K1$)
10.24	$235.52 \times K1$ (23 $\times K1$)	$10.24 \times K1$ (1 $\times K1$)	$20.48 \times K1$ (2 $\times K1$)
Note 1: Void			
Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.			

Table 4.2.2.9.3-3: $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2) for eDRX_IDLE cycle upto 10.24s

eDRX_IDLE cycle length [s]	$T_{\text{detect,NR_Intra}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure,NR_Intra}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate,NR_Intra}}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times N1 \times K1$ ($23 \times N1 \times K1$)	$2.56 \times N1 \times K1$ ($1 \times K1$)	$7.68 \times N1 \times K1$ ($3 \times N1 \times K1$)
5.12	$117.76 \times N1 \times K1$ ($23 \times N1 \times K1$)	$5.12 \times N1 \times K1$ ($1 \times N1 \times K1$)	$10.24 \times N1 \times K1$ ($2 \times N1 \times K1$)
10.24	$235.52 \times N1 \times K1$ ($23 \times N1 \times K1$)	$10.24 \times N1 \times K1$ ($1 \times N1 \times K1$)	$20.48 \times N1 \times K1$ ($2 \times N1 \times K1$)
Note 1: For UE supporting FR2-1 power class 2&3&4, $N1 = 3$. For UE supporting FR2-1 power class 1 or 5, $N1 = 8$ for all DRX cycle length.			
Note 2: Void			
Note 3: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.			

Table 4.2.2.9.3-4: $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	T _{detect,NR_Intra} [s] (number of DRX cycles ^{Note 3})	T _{measure,NR_Intra} [s] (number of DRX cycles ^{Note 3})	T _{evaluate,NR_Intra} [s] (number of DRX cycles ^{Note 3})
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥3.84 (3)	$eDRX_cycle_length$ $\times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil \times K1$ $(23 \times K1)$	0.32 x M2 x K1 (1 x M2 x K1)	0.64 x M2 x K1 (2 x M2 x K1)
	0.64	≥3.84 (3)		0.64 x K1 (1 x K1)	1.28 x K1 (2 x K1)
	1.28	≥7.68 (6)		1.28 x K1 (1 x K1)	2.56 x K1 (2 x K1)
	2.56	≥15.36 (12)		2.56 x K1 (1 x K1)	5.12 x K1 (2 x K1)
Note 1: The number of DRX cycles in this table correspond to the DRX cycles within PTWs.					
Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].					
Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Intra} \times DRX_cycle}{1.28} \right\rceil \times 1.28$.					
Note 4: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.					
Note 5: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.					

Table 4.2.2.9.3-5: $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	$T_{\text{detect,NR_Intra}}$ [s] (number of DRX cycles ^{Note 3})	$T_{\text{measure,NR_Intra}}$ [s] (number of DRX cycles ^{Note 3})	$T_{\text{evaluate,NR_Intra}}$ [s] (number of DRX cycles ^{Note 3})
$20.48 \leq \text{eDRX_IDLE cycle length} \leq [163.84]$	0.32	≥ 15.36 (12)	8	$K1 \times \frac{e\text{DRX_cycle_length}}{23 \times N1} \times \left\lceil \frac{PTW / \text{DRX_cycle_length}}{(23 \times N1 \times K1)} \right\rceil$	$0.32 \times N1 \times K1$ ($1 \times N1 \times K1$)	$0.64 \times N1 \times K1$ ($2 \times N1 \times K1$)
	0.64	≥ 19.2 (15)	5		$0.64 \times N1 \times K1$ ($1 \times N1 \times K1$)	$1.28 \times N1 \times K1$ ($2 \times N1 \times K1$)
	1.28	≥ 30.72 (24)	4		$1.28 \times N1 \times K1$ ($1 \times N1 \times K1$)	$2.56 \times N1 \times K1$ ($2 \times N1 \times K1$)

	2.56	40.96 (32)	3		20.48	40.96
Note 1:	Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.					
Note 2:	The number of DRX cycles in this table corresponds to the DRX cycles within PTWs.					
Note 3:	The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].					
Note 4:	The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,NR_Intra*DRX_cycle}}}{1.28} \right\rceil * 1.28$.					
Note 5:	The measurement shall not be performed across PTW's. In this case the measurement is performed in the next available PTW.					
Note 6:	The evaluation shall not be performed across PTW's.					
Note 7:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation criterion</i> [2].					

4.2.2.9.4 Measurements for UE fulfilling low mobility and not-at-cell edge criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and
- both *lowMobilityEvaluation* [2] and *cellEdgeEvaluation* [2] criteria are fulfilled, and
- less than 1 hour have passed since measurements for cell reselection were last performed

In this case the UE is not required to meet $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ as defined in Table 4.2.2.3-1 or Table 4.2.2.3-4 or Table 4.2.2.3-5.

4.2.2.10 Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion

4.2.2.10.1 Introduction

This clause contains the requirements for measurements on inter-frequency NR cells when the UE is configured with any of following relaxed measurement criteria:

- Relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in [1],
- Relaxed measurement criterion for UE not-at-cell edge defined in clause 5.2.4. 9.2 in [1],
- Both low mobility criterion and not-at-cell edge criterion as defined in clauses 5.2.4. 9.1 and 5.2.4.9.2 in [1] respectively.

4.2.2.10.2 Measurements for UE fulfilling low mobility criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is only configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled the *lowMobilityEvaluation* [2] criterion, or
- UE is configured with both *lowMobilityEvaluation* [2] and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] is not configured, and
- UE has fulfilled only the *lowMobilityEvaluation* [2] criterion.

The UE shall not relax measurements on NR inter-frequency carriers configured for idle mode CA/DC measurements (defined in clause 4.4) while T331 is running.

When $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$ then the requirements are defined as follows:

- The UE shall be able to evaluate whether a newly detectable inter-frequency NR cell meets the reselection criteria defined in TS38.304 [1] within $N_{\text{carrier_Relax}} * T_{\text{detect,NR_Inter_Relax}} + N_{\text{carrier_Non_relax}} * T_{\text{detect,NR_Inter}}$. Cells which have been detected shall be measured at least every $N_{\text{carrier_Relax}} * T_{\text{measure,NR_Inter_Relax}} + N_{\text{carrier_Non_relax}} *$

$T_{\text{measure,NR_Inter}}$. The UE shall be able to evaluate that an already identified inter-frequency NR cell has met reselection criterion defined in TS 38.304 [1] within $N_{\text{carrier_Relax}} * T_{\text{evaluate,NR_Inter_Relax}} + N_{\text{carrier_Non_relax}} * T_{\text{evaluate,NR_Inter}}$.

- When T331 is running,
 - The parameter $N_{\text{carrier_Relax}}$ is the total number of NR inter-frequency carriers not configured for idle mode CA/DC measurements.
 - The parameter $N_{\text{carrier_Non_relax}}$ is the total number of NR inter-frequency carriers configured for idle mode CA/DC measurements.
- When T331 is not running,
 - The parameter $N_{\text{carrier_Relax}}$ is the total number of inter-frequency carriers configured for mobility measurements only and the number of inter-frequency carriers configured for both mobility measurement and idle mode CA/DC measurements.
 - The parameter $N_{\text{carrier_Non_relax}} = 0$
- For a UE not configured with eDRX_IDLE, $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$ are as specified in Table 4.2.2.10.2-1 and $T_{\text{detect,NR_Inter}}$, $T_{\text{measure,NR_Inter}}$ and $T_{\text{evaluate,NR_Inter}}$ are as specified in Table 4.2.2.4.1-1.
- For a UE configured with eDRX_IDLE, $T_{\text{detect,NR_Inter}}$, $T_{\text{measure,NR_Inter}}$ and $T_{\text{evaluate,NR_Inter}}$ are as specified in Table 4.2.2.4-3 and Table 4.2.2.4-4 for FR1 and FR2 respectively.
- For a UE configured with eDRX_IDLE cycle up to 10.24s, $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$ are as specified in Table 4.2.2.10.2-2 and Table 4.2.2.10.2-3 for FR1 and FR2, respectively.
- For a UE configured with eDRX_IDLE cycle greater than 10.24s, $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$ are as specified in Table 4.2.2.10.2-4 and Table 4.2.2.10.2-5 for FR1 and FR2, respectively, provided eDRX cycle is $\leq [163.84]$ sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW length.

When UE is only configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled the *lowMobilityEvaluation* [2] criterion, and $S_{\text{rxlev}} > S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} > S_{\text{nonIntraSearchQ}}$,

- if the UE is configured with *highPriorityMeasRelax* [2] then the UE shall search for inter-frequency layers of higher priority at least every $K2 * \text{Thigher_priority_search}$ where *Thigher_priority_search* is described in clause 4.2.2.7 and, $K2 = 60$
- otherwise, the UE shall search for inter-frequency layers of higher priority at least every *Thigher_priority_search* where *Thigher_priority_search* is described in clause 4.2.2.7.

Table 4.2.2.10.2-1: $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$

DRX cycle length [s]	Scaling Factor (N1)			T _{detect,NR_Inter_Relax} [s] (number of DRX cycles)	T _{measure,NR_Inter_Relax} [s] (number of DRX cycles)	T _{evaluate,NR_Inter_Relax} [s] (number of DRX cycles)
	FR1	FR2-1 ^{Note1}	FR2-2 ^{Note2}			
0.32	1	8	12	11.52 x N1 x K1 x 1.5 (36 x N1 x K1 x 1.5)	1.28 x N1 x K1x 1.5 (4 x N1 x K1 x 1.5)	5.12 x N1 x K1x 1.5 (16 x N1 x K1 x 1.5)
0.64		5	8	17.92x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)
1.28		4	6	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	5	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
Note 1:	Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.					
Note 2:	Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.					
Note 3:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling <i>lowMobilityEvaluation</i> [2] criterion.					

Table 4.2.2.10.2-2: $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$ for UE configured with eDRX_IDLE cycle upto 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	$T_{\text{detect,NR_Inter_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure,NR_Inter_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate,NR_Inter_Relax}}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times K1$ (23 x K1)	$2.56 \times K1$ (1 x K1)	$7.68 \times K1$ (3 x K1)
5.12	$117.76 \times K1$ (23 x K1)	$5.12 \times K1$ (1 x K1)	$10.24 \times K1$ (2 x K1)
10.24	$235.52 \times K1$ (23 x K1)	$10.24 \times K1$ (1 x K1)	$20.48 \times K1$ (2 x K1)
Note 1: Void			
Note 2: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.			

Table 4.2.2.10.2-3: $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$ for UE configured with eDRX_IDLE cycle upto 10.24s (Frequency range FR2)

eDRX_IDLE cycle length [s]	$T_{\text{detect,NR_Inter_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure,NR_Inter_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate,NR_Inter_Relax}}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times N1 \times K1$ (23 x N1 x K1)	$2.56 \times N1 \times K1$ (1 x N1 x K1)	$7.68 \times N1 \times K1$ (3 x N1 x K1)
5.12	$117.76 \times N1 \times K1$ (23 x N1 x K1)	$5.12 \times N1 \times K1$ (1 x N1 x K1)	$10.24 \times N1 \times K1$ (2 x N1 x K1)
10.24	$235.52 \times N1 \times K1$ (23 x N1 x K1)	$10.24 \times N1 \times K1$ (1 x N1 x K1)	$20.48 \times N1 \times K1$ (2 x N1 x K1)
Note 1: For UE supporting FR2-1 power class 2&3&4, $N1=3$. For UE supporting FR2-1 power class 1 or 5, $N1 = 8$ for all DRX cycle length.			
Note 2: Void			
Note 3: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.			

Table 4.2.2.10.2-4: $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	T _{detect,NR_Inter_Relax} [s] (number of DRX cycles ^{Note 3})	T _{measure,NR_Inter_Relax} [s] (number of DRX cycles ^{Note 3})	T _{evaluate,NR_Inter_Relax} [s] (number of DRX cycles ^{Note 3})
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥3.84 (3)	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil \times K1$ (23 x K1)	0.32 x 1.5 x K1 (1 x M2 x K1)	0.64 x 1.5 x K1 (2 x M2 x K1)
	0.64	≥3.84 (3)		0.64 x K1 (1 x K1)	1.28 x K1 (2 x K1)
	1.28	≥7.68 (6)		1.28 x K1 (1 x K1)	2.56 x K1 (2 x K1)
	2.56	≥15.36 (12)		2.56 x K1 (1 x K1)	5.12 x K1 (2 x K1)
Note 1:	The number of DRX cycles in this table correspond to the DRX cycles within PTWs.				
Note 2:	The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].				
Note 3:	The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,NR_Inter_Relax}} \times \text{DRX_cycle}}{1.28} \right\rceil * 1.28$.				
Note 4:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.				

Table 4.2.2.10.2-5: $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	Tdetect,NR_Inter_Relax [s] (number of DRX cycles Note 3)	Tmeasure,NR_Inter_Re lax [s] (number of DRX cycles Note 3)	Tevaluate,NR_Inter_Rel ax [s] (number of DRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥15.36 (12)	8	$K1 \times eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW / DRX_cycle_length} \right\rceil$ (23 x N1 x K1)	0.32 x N1 x K1 (1 x N1 x K1)	0.64 x N1 x K1 (2 x N1 x K1)
	0.64	≥19.2 (15)	5		0.64 x N1 x K1 (1 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)
	1.28	≥30.72 (24)	4		1.28 x N1 x K1 (1 x N1 x K1)	2.56 x N1 x K1 (2 x N1 x K1)
	2.56	40.96 (32)	3		20.48	40.96
Note 1: Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length. Note 2: The number of DRX cycles in this table correspond to the DRX cycles within PTWs. Note 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39]. Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Inter_relax} \times DRX_cycle}{1.28} \right\rceil \times 1.28$. Note 5: The measurement shall not be performed across PTW's. In this case the measurement is performed in the next available PTW. Note 6: The evaluation shall not be performed across PTW's. Note 7: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation criterion</i> [2].						

4.2.2.10.3 Measurements for UE fulfilling not-at-cell edge criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is only configured with *cellEdgeEvaluation* [2] criterion, and UE has fulfilled the *cellEdgeEvaluation* [2] criterion or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] is not configured, and
- UE has fulfilled only the *cellEdgeEvaluation* [2] criterion.

The UE shall not relax measurements on NR inter-frequency carriers configured for idle mode CA/DC measurements (defined in clause 4.4) while T331 is running.

When $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$ then the requirements defined in clause 4.2.2.4 apply for this clause except that:

- The UE shall be able to evaluate whether a newly detectable inter-frequency NR cell meets the reselection criteria defined in TS38.304 [1] within $N_{\text{carrier_Relax}} \times T_{\text{detect,NR_Inter_Relax}} + N_{\text{carrier_Non_relax}} \times T_{\text{detect,NR_Inter}}$. Cells which have been detected shall be measured at least every $N_{\text{carrier_Relax}} \times T_{\text{measure,NR_Inter_Relax}} + N_{\text{carrier_Non_relax}} \times T_{\text{measure,NR_Inter}}$. The UE shall be able to evaluate that an already identified inter-frequency NR cell has met reselection criterion defined in TS 38.304 [1] within $N_{\text{carrier_Relax}} \times T_{\text{evaluate,NR_Inter_Relax}} + N_{\text{carrier_Non_relax}} \times T_{\text{evaluate,NR_Inter}}$.
- When T331 is running,
 - The parameter $N_{\text{carrier_Relax}}$ is the total number of NR inter-frequency carriers not configured for idle mode CA/DC measurements.

- The parameter $N_{\text{carrier_Non_relax}}$ is the total number of NR inter-frequency carriers configured for idle mode CA/DC measurements.
- When T331 is not running,
 - The parameter $N_{\text{carrier_Relax}}$ is the total number of inter-frequency carriers configured for mobility measurements only and the number of inter-frequency carriers configured for both mobility measurement and idle mode CA/DC measurements.

The parameter $N_{\text{carrier_Non_relax}} = 0$.

- For a UE not configured with eDRX_IDLE, $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$ are as specified in Table 4.2.2.10.3-1 and $T_{\text{detect,NR_Inter}}$, $T_{\text{measure,NR_Inter}}$ and $T_{\text{evaluate,NR_Inter}}$ are as specified in Table 4.2.2.4.1-1.
- For a UE configured with eDRX_IDLE, $T_{\text{detect,NR_Inter}}$, $T_{\text{measure,NR_Inter}}$ and $T_{\text{evaluate,NR_Inter}}$ are as specified in Table 4.2.2.4-3 and Table 4.2.2.4-4 for FR1 and FR2 respectively.
- For a UE configured with eDRX_IDLE cycle up to 10.24s, $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$ are as specified in Table 4.2.2.10.3-2 and Table 4.2.2.10.3-3 for FR1 and FR2, respectively.
- For a UE configured with eDRX_IDLE cycle greater than 10.24s, $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$ are as specified in Table 4.2.2.10.3-4 and Table 4.2.2.10.3-5 for FR1 and FR2, respectively, provided eDRX cycle is $\leq [163.84]$ sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW length.

When $S_{\text{rxlev}} > S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} > S_{\text{nonIntraSearchQ}}$, then regardless of whether the UE is configured with *highPriorityMeasRelax* [2] or not, the UE shall search for inter-frequency layers of higher priority at least every $T_{\text{higher_priority_search}}$ where $T_{\text{higher_priority_search}}$ is described in clause 4.2.2.7.

Table 4.2.2.10.3-1: $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$

DRX cycle length [s]	Scaling Factor (N1)			T _{detect,NR_Inter_Relax} [s] (number of DRX cycles)	T _{measure,NR_Inter_Relax} [s] (number of DRX cycles)	T _{evaluate,NR_Inter_Relax} [s] (number of DRX cycles)
	FR1	FR2-1 ^{Note1}	FR2-2 ^{Note2}			
0.32	1	8	12	11.52 x N1 x K1 x 1.5 (36 x N1 x K1 x 1.5)	1.28 x N1 x K1 x 1.5 (4 x N1 x K1 x 1.5)	5.12 x N1 x K1 x 1.5 (16 x N1 x K1 x 1.5)
0.64		5	8	17.92x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)
1.28		4	6	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	5	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
Note 1:	Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.					
Note 2:	Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.					
Note 3:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.					

Table 4.2.2.10.3-2: $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1) for eDRX_IDLE cycle upto 10.24s

eDRX_IDLE cycle length [s]	$T_{\text{detect,NR_Inter_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure,NR_Inter_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate,NR_Inter_Relax}}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times K1$ (23 x K1)	$2.56 \times K1$ (1 x K1)	$7.68 \times K1$ (3 x K1)
5.12	$117.76 \times K1$ (23 x K1)	$5.12 \times K1$ (1 x K1)	$10.24 \times K1$ (2 x K1)
10.24	$235.52 \times K1$ (23 x K1)	$10.24 \times K1$ (1 x K1)	$20.48 \times K1$ (2 x K1)
Note 1: Void.			
Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.			

Table 4.2.2.10.3-3: $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2) for eDRX_IDLE cycle upto 10.24s

eDRX_IDLE cycle length [s]	$T_{\text{detect,NR_Inter_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure,NR_Inter_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate,NR_Inter_Relax}}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times N1 \times K1$ ($23 \times N1 \times K1$)	$2.56 \times N1 \times K1$ ($1 \times N1 \times K1$)	$7.68 \times N1 \times K1$ ($3 \times N1 \times K1$)
5.12	$117.76 \times N1 \times K1$ ($23 \times N1 \times K1$)	$5.12 \times N1 \times K1$ ($1 \times N1 \times K1$)	$10.24 \times N1 \times K1$ ($2 \times N1 \times K1$)
10.24	$235.52 \times N1 \times K1$ ($23 \times N1 \times K1$)	$10.24 \times N1 \times K1$ ($1 \times N1 \times K1$)	$20.48 \times N1 \times K1$ ($2 \times N1 \times K1$)
Note 1: For UE supporting FR2-1 power class 2&3&4, $N1=3$. For UE supporting FR2-1 power class 1 or 5, $N1 = 8$ for all DRX cycle length.			
Note 2: Void.			
Note 3: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.			

Table 4.2.2.10.3-4: $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s(Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	T _{detect,NR_Inter_Relax} [s] (number of DRX cycles ^{Note 3)}	T _{measure,NR_Inter_Relax} [s] (number of DRX cycles ^{Note 3)}	T _{evaluate,NR_Inter_Relax} [s] (number of DRX cycles ^{Note 3)}
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥3.84 (3)	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil \times K1$ (23 × K1)	0.32 × M2 × K1 (1 × M2 × K1)	0.64 × M2 × K1 (2 × M2 × K1)
	0.64	≥3.84 (3)		0.64 × K1 (1 × K1)	1.28 × K1 (2 × K1)
	1.28	≥7.68 (6)		1.28 × K1 (1 × K1)	2.56 × K1 (2 × K1)
	2.56	≥15.36 (12)		2.56 × K1 (1 × K1)	5.12 × K1 (2 × K1)
Note 1: The number of DRX cycles in this table correspond to the DRX cycles within PTWs.					
Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].					
Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Inter_Relax} \times DRX_cycle}{1.28} \right\rceil \times 1.28$.					
Note 4: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer T _{detect, NR_intra} is expected.					
Note 5: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.					

Table 4.2.2.10.3-5: $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) ^{Note1}	$T_{\text{detect,NR_Inter_Relax}}$ [s] (number of DRX cycles ^{Note 3)}	$T_{\text{measure,NR_Inter_Relax}}$ [s] (number of DRX cycles ^{Note 3)}	$T_{\text{evaluate,NR_Inter_Relax}}$ [s] (number of DRX cycles ^{Note 3)}
$20.48 \leq \text{eDRX_IDLE cycle length} \leq [163.84]$	0.32	≥ 15.36 (12)	8	$K1 \times \frac{\text{eDRX_cycle_length}}{23 \times N1} \times \left\lceil \frac{\text{PTW/DRX_cycle_length}}{\text{PTW/DRX_cycle_length}} \right\rceil$ ($23 \times N1 \times K1$)	$0.32 \times N1 \times K1$ ($1 \times N1 \times K1$)	$0.64 \times N1 \times K1$ ($2 \times N1 \times K1$)
	0.64	≥ 19.2 (15)	5		$0.64 \times N1 \times K1$ ($1 \times N1 \times K1$)	$1.28 \times N1 \times K1$ ($2 \times N1 \times K1$)
	1.28	≥ 30.72 (24)	4		$1.28 \times N1 \times K1$ ($1 \times N1 \times K1$)	$2.56 \times N1 \times K1$ ($2 \times N1 \times K1$)

	2.56	40.96 (32)	3		20.48	40.96
Note 1:	Applies for UE supporting FR2-1 power class 2&3&4. For UE supporting FR2-1 power class 1 or 5, N1 = 8 for all DRX cycle length.					
Note 2:	The number of DRX cycles in this table correspond to the DRX cycles within PTWs.					
Note 3:	The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].					
Note 4:	The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,NR_Inter_Relax}} \cdot \text{DRX_cycle}}{1.28} \right\rceil * 1.28$.					
Note 5:	The measurement shall not be performed across PTW's. In this case the measurement is performed in the next available PTW.					
Note 6:	The evaluation shall not be performed across PTW's.					
Note 7:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation criterion</i> [2].					

4.2.2.10.4 Measurements for UE fulfilling low mobility and not-at-cell edge criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- T331 timer is not running for EMR measurements on inter-frequency NR carrier, and
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and
- both *lowMobilityEvaluation* [2] and *cellEdgeEvaluation* [2] criteria are fulfilled.

In this case the UE is not required to meet $T_{\text{detect,NR_Inter}}$, $T_{\text{measure,NR_Inter}}$ and $T_{\text{evaluate,NR_Inter}}$ as defined in Table 4.2.2.4-1 or Table 4.2.2.4-3 or Table 4.2.2.4-4.

When $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$, the UE shall search for, measure and evaluate inter-frequency layers of higher, equal, or lower priority at least every 1 hour.

When $S_{\text{rxlev}} > S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} > S_{\text{nonIntraSearchQ}}$, the UE shall search for inter-frequency layers of higher priority at least every $K2 \cdot T_{\text{higher_priority_search}}$ where $T_{\text{higher_priority_search}}$ is described in clause 4.2.2.7 and $K2=60$.

4.2.2.11 Measurements of inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion

4.2.2.11.1 Introduction

This clause contains the requirements for measurements on inter-RAT E-UTRAN cells when the UE is configured with any of following relaxed measurement criteria:

- Relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in [1],
- Relaxed measurement criterion for UE not-at-cell edge defined in clause 5.2.4.9.2 in [1],
- Both low mobility criterion and not-at-cell edge criterion as defined in clauses 5.2.4.9.1 and 5.2.4.9.2 in [1] respectively.

4.2.2.11.2 Measurements for UE fulfilling low mobility criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- T331 timer is not running for EMR measurements on inter-RAT E-UTRAN, and
- UE is only configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled the *lowMobilityEvaluation* [2] criterion, or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] is not configured, and

- UE has fulfilled only the *lowMobilityEvaluation* [2] criterion.

The UE shall not relax measurements on inter-RAT E-UTRAN carriers configured for idle mode CA/DC measurements (defined in clause 4.4) while T331 is running.

When $S_{rxlev} \leq S_{nonIntraSearchP}$ or $S_{qual} \leq S_{nonIntraSearchQ}$ then the requirements defined in clause 4.2.2.5 apply for this clause except that:

- The UE shall be able to evaluate whether a newly detectable inter-RAT E-UTRAN cell meets the reselection criteria defined in TS38.304 [1] within $N_{EUTRAN\ carrier_Relax} * T_{detect,EUTRAN_Relax} + N_{EUTRAN\ carrier_Non_relax} * T_{detect,EUTRAN}$. Cells which have been detected shall be measured at least every $N_{EUTRAN\ carrier_Relax} * T_{measure,EUTRAN_Relax} + N_{EUTRAN\ carrier_Non_relax} * T_{measure,EUTRAN}$. The UE shall be able to evaluate that an already identified inter-RAT E-UTRAN cell has met reselection criterion defined in TS 38.304 [1] within $N_{EUTRAN\ carrier_Relax} * T_{evaluate,EUTRAN_Relax} + N_{EUTRAN\ carrier_Non_relax} * T_{evaluate,EUTRAN}$.
- When T331 is running,
 - The parameter $N_{EUTRAN\ carrier_Relax}$ is the total number of inter-RAT E-UTRAN carriers not configured for idle mode CA/DC measurements.
 - The parameter $N_{EUTRAN\ carrier_Non_relax}$ is the total number of inter-RAT E-UTRAN carriers configured for idle mode CA/DC measurements.
- When T331 is not running,
 - The parameter $N_{EUTRAN\ carrier_Relax}$ is the total number of inter-RAT E-UTRAN carriers configured for mobility measurements only and the number of inter-RAT E-UTRAN carriers configured for both mobility measurement and idle mode CA/DC measurements.
 - The parameter $N_{EUTRAN\ carrier_Non_relax} = 0$.
- For a UE not configured with eDRX_IDLE, $T_{detect,EUTRAN_Relax}$, $T_{measure,EUTRAN_Relax}$ and $T_{evaluate,EUTRAN_Relax}$ are as specified in Table 4.2.2.11.2-1 and $T_{detect,EUTRAN}$, $T_{measure,EUTRAN}$ and $T_{evaluate,EUTRAN}$ are as specified in Table 4.2.2.5-1.
- For a UE configured with eDRX_IDLE, $T_{detect,EUTRAN}$, $T_{measure,EUTRAN}$ and $T_{evaluate,EUTRAN}$ are as specified in Table 4.2.2.5-3.
- For a UE configured with eDRX_IDLE cycle up to 10.24s, $T_{detect,EUTRAN_Relax}$, $T_{measure,EUTRAN_Relax}$ and $T_{evaluate,EUTRAN_Relax}$ are as specified in Table 4.2.2.11.2-2.
- For a UE configured with eDRX_IDLE cycle greater than 10.24s, $T_{detect,EUTRAN_Relax}$, $T_{measure,EUTRAN_Relax}$ and $T_{evaluate,EUTRAN_Relax}$ are as specified in Table 4.2.2.11.2-3, provided eDRX cycle is $\leq [163.84]$ sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW length.

When UE is only configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled the *lowMobilityEvaluation* [2] criterion, and $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$,

- if the UE is configured with *highPriorityMeasRelax* [2] then the UE shall search for E-UTRA inter-RAT frequency layers of higher priority at least every $K2 * T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7 and, $K2 = 60$
- otherwise, the UE shall search for E-UTRA inter-RAT frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7.

Table 4.2.2.11.2-1: $T_{detect,EUTRAN_Relax}$, $T_{measure,EUTRAN_Relax}$, and $T_{evaluate,EUTRAN_Relax}$

DRX cycle length [s]	$T_{detect,EUTRAN_Relax}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN_Relax}$ [s] (number of DRX cycles)
0.32	$11.52 \times K1$ ($36 \times K1$)	$1.28 \times K1$ ($4 \times K1$)	$5.12 \times K1$ ($16 \times K1$)
0.64	$17.92 \times K1$ ($28 \times K1$)	$1.28 \times K1$ ($2 \times K1$)	$5.12 \times K1$ ($8 \times K1$)
1.28	$32 \times K1$ ($25 \times K1$)	$1.28 \times K1$ ($1 \times K1$)	$6.4 \times K1$ ($5 \times K1$)
2.56	$58.88 \times K1$ ($23 \times K1$)	$2.56 \times K1$ ($1 \times K1$)	$7.68 \times K1$ ($3 \times K1$)

Note 1: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *lowMobilityEvaluation* [2] criterion.

Table 4.2.2.11.2-2: $T_{\text{detect, EUTRAN_Relax}}$, $T_{\text{measure, EUTRAN_Relax}}$ and $T_{\text{evaluate, EUTRAN_Relax}}$ for UE configured with eDRX_IDLE cycle upto 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	$T_{\text{detect, EUTRAN_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure, EUTRAN_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate, EUTRAN_Relax}}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times K1$ (23 x K1)	$2.56 \times K1$ (1 x K1)	$7.68 \times K1$ (3 x K1)
5.12	$117.76 \times K1$ (23 x K1)	$5.12 \times K1$ (1 x K1)	$10.24 \times K1$ (2 x K1)
10.24	$235.52 \times K1$ (23 x K1)	$10.24 \times K1$ (1 x K1)	$20.48 \times K1$ (2 x K1)
Note 1: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.			

Table 4.2.2.11.2-3: $T_{\text{detect, EUTRAN_Relax}}$, $T_{\text{measure, EUTRAN_Relax}}$ and $T_{\text{evaluate, EUTRAN_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	T _{detect, EUTRAN_Relay} [s] (number of DRX cycles ^{Note 3)}	T _{measure, EUTRAN_Relay} [s] (number of DRX cycles ^{Note 3)}	T _{evaluate, EUTRAN_Relay} [s] (number of DRX cycles ^{Note 3)}
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥3.84 (3)	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil \times K1$ (23 x K1)	0.32 x K1 (1 x K1)	0.64 x K1 (2 x K1)
	0.64	≥3.84 (3)		0.64 x K1 (1 x K1)	1.28 x K1 (2 x K1)
	1.28	≥7.68 (6)		1.28 x K1 (1 x K1)	2.56 x K1 (2 x K1)
	2.56	≥15.36 (12)		2.56 x K1 (1 x K1)	5.12 x K1 (2 x K1)
Note 1: The number of DRX cycles in this table correspond to the DRX cycles within PTWs.					
Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].					
Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,EUTRAN_Relax} \times DRX_cycle}{1.28} \right\rceil \times 1.28$.					
Note 4: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.					

4.2.2.11.3 Measurements for UE fulfilling with not-at-cell edge criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- T331 timer is not running for EMR measurements on inter-RAT E-UTRAN, and
- UE is only configured with *cellEdgeEvaluation* [2] criterion and UE has fulfilled the *cellEdgeEvaluation* [2] criterion, or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] is not configured, and
- UE has fulfilled only the *cellEdgeEvaluation* [2] criterion.

The UE shall not relax measurements on inter-RAT E-UTRAN carriers configured for idle mode CA/DC measurements (defined in clause 4.4) while T331 is running.

When $S_{rxlev} \leq S_{nonIntraSearchP}$ or $S_{qual} \leq S_{nonIntraSearchQ}$ then the requirements defined in clause 4.2.2.5 apply for this clause except that:

- The UE shall be able to evaluate whether a newly detectable inter-RAT E-UTRAN cell meets the reselection criteria defined in TS38.304 [1] within $N_{EUTRAN_carrier_Relax} * T_{detect,EUTRAN_Relax} + N_{EUTRAN_carrier_Non_relax} * T_{detect,EUTRAN}$. Cells which have been detected shall be measured at least every $N_{EUTRAN_carrier_Relax} * T_{measure,EUTRAN_Relax} + N_{EUTRAN_carrier_Non_relax} * T_{measure,EUTRAN}$. The UE shall be able to evaluate that an already identified inter-RAT E-UTRAN cell has met reselection criterion defined in TS 38.304 [1] within $N_{EUTRAN_carrier_Relax} * T_{evaluate,EUTRAN_Relax} + N_{EUTRAN_carrier_Non_relax} * T_{evaluate,EUTRAN}$.
- When T331 is running,
 - The parameter $N_{EUTRAN_carrier_Relax}$ is the total number of inter-RAT E-UTRAN carriers not configured for idle mode CA/DC measurements.
 - The parameter $N_{EUTRAN_carrier_Non_relax}$ is the total number of inter-RAT E-UTRAN carriers configured for idle mode CA/DC measurements.
- When T331 is not running,
 - The parameter $N_{EUTRAN_carrier_Relax}$ is the total number of inter-RAT E-UTRAN carriers configured for mobility measurements only and the number of inter-RAT E-UTRAN carriers configured for both mobility measurement and idle mode CA/DC measurements.
 - The parameter $N_{EUTRAN_carrier_Non_relax} = 0$.
- For a UE not configured with eDRX_IDLE, $T_{detect,EUTRAN_Relax}$, $T_{measure,EUTRAN_Relax}$ and $T_{evaluate,EUTRAN_Relax}$ are as specified in Table 4.2.2.11.3-1 and $T_{detect,EUTRAN}$, $T_{measure,EUTRAN}$ and $T_{evaluate,EUTRAN}$ are as specified in Table 4.2.2.5-1.
- For a UE configured with eDRX_IDLE, $T_{detect,EUTRAN}$, $T_{measure,EUTRAN}$ and $T_{evaluate,EUTRAN}$ are as specified in Table 4.2.2.5-3.
- For a UE configured with eDRX_IDLE cycle up to 10.24s, $T_{detect,EUTRAN_Relax}$, $T_{measure,EUTRAN_Relax}$ and $T_{evaluate,EUTRAN_Relax}$ are as specified in Table 4.2.2.11.3-2.
- For a UE configured with eDRX_IDLE cycle greater than 10.24s, $T_{detect,EUTRAN_Relax}$, $T_{measure,EUTRAN_Relax}$ and $T_{evaluate,EUTRAN_Relax}$ are as specified in Table 4.2.2.11.3-3, provided eDRX cycle is $\leq [163.84]$ sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW length.

When $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$, then regardless of whether the UE is configured with *highPriorityMeasRelax* [2] or not, the UE shall search for inter-RAT E-UTRAN frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7.

Table 4.2.2.11.3-1: $T_{detect,EUTRAN_Relax}$, $T_{measure,EUTRAN_Relax}$, and $T_{evaluate,EUTRAN_Relax}$

DRX cycle length [s]	$T_{detect,EUTRAN_Relax}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN_Relax}$ [s] (number of DRX cycles)
0.32	$11.52 \times K1$ (36 $\times$ K1)	$1.28 \times K1$ (4 $\times$ K1)	$5.12 \times K1$ (16 $\times$ K1)
0.64	$17.92 \times K1$ (28 $\times$ K1)	$1.28 \times K1$ (2 $\times$ K1)	$5.12 \times K1$ (8 $\times$ K1)
1.28	$32 \times K1$ (25 $\times$ K1)	$1.28 \times K1$ (1 $\times$ K1)	$6.4 \times K1$ (5 $\times$ K1)
2.56	$58.88 \times K1$ (23 $\times$ K1)	$2.56 \times K1$ (1 $\times$ K1)	$7.68 \times K1$ (3 $\times$ K1)
Note 1: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.			

Table 4.2.2.11.3-2: $T_{\text{detect, EUTRAN_Relax}}$, $T_{\text{measure, EUTRAN_Relax}}$ and $T_{\text{evaluate, EUTRAN_Relax}}$ for UE configured with eDRX_IDLE cycle upto 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	$T_{\text{detect, EUTRAN_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure, EUTRAN_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate, EUTRAN_Relax}}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times K1$ ($23 \times K1$)	$2.56 \times K1$ ($1 \times K1$)	$7.68 \times K1$ ($3 \times K1$)
5.12	$117.76 \times K1$ ($23 \times K1$)	$5.12 \times K1$ ($1 \times K1$)	$10.24 \times K1$ ($2 \times K1$)
10.24	$235.52 \times K1$ ($23 \times K1$)	$10.24 \times K1$ ($1 \times K1$)	$20.48 \times K1$ ($2 \times K1$)
Note 1: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.			

Table 4.2.2.11.3-3: $T_{\text{detect, EUTRAN_Relax}}$, $T_{\text{measure, EUTRAN_Relax}}$ and $T_{\text{evaluate, EUTRAN_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	T _{detect, EUTRAN_Relax} [s] (number of DRX cycles ^{Note 3)}	T _{measure, EUTRAN_Relax} [s] (number of DRX cycles ^{Note 3)}	T _{evaluate, EUTRAN_Relax} [s] (number of DRX cycles ^{Note 3)}
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥3.84 (3)	$eDRX_cycle_length \times \left\lceil \frac{PTW/DRX_cycle_length}{23} \right\rceil \times K1$ (23 × K1)	0.32 × K1 (1 × M2 × K1)	0.64 × K1 (2 × M2 × K1)
	0.64	≥3.84 (3)		0.64 × K1 (1 × K1)	1.28 × K1 (2 × K1)
	1.28	≥7.68 (6)		1.28 × K1 (1 × K1)	2.56 × K1 (2 × K1)
	2.56	≥15.36 (12)		2.56 × K1 (1 × K1)	5.12 × K1 (2 × K1)
Note 1:	The number of DRX cycles in this table corresponds to the DRX cycles within PTWs.				
Note 2:	The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].				
Note 3:	The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate, EUTRAN_Relax}} \times \text{DRX_cycle}}{1.28} \right\rceil \times 1.28$.				
Note 4:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.				

4.2.2.11.4 Measurements for UE fulfilling low mobility and not-at-cell edge criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- T331 timer is not running for EMR measurements on inter-RAT E-UTRAN, and
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and
- both *lowMobilityEvaluation* [2] and *cellEdgeEvaluation* [2] criteria are fulfilled.

In this case the UE is not required to meet $T_{\text{detect, EUTRAN}}$, $T_{\text{measure, EUTRAN}}$ and $T_{\text{evaluate, EUTRAN}}$ as defined in Table 4.2.2.5-1 or Table 4.2.2.5-3.

When $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$, the UE shall search for, measure and evaluate inter-RAT E-UTRAN layers of higher or lower priority at least every 1 hour.

When $S_{\text{rxlev}} > S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} > S_{\text{nonIntraSearchQ}}$, the UE shall search for inter-RAT E-UTRAN of higher priority at least every $K2 \times T_{\text{higher_priority_search}}$ where $T_{\text{higher_priority_search}}$ is described in clause 4.2.2.7 and $K2=60$.

4.2A Cell Re-selection when subject to CCA

4.2A.1 Introduction

The cell reselection procedure allows the UE to select a more suitable cell and camp on it. The requirements in clauses 4.2A.2.3, 4.2A.2.4, and 4.2A.2.6, apply when at least the target cell is on a carrier frequency subject to CCA, and the requirements in clauses 4.2A.2.2, and 4.2A.2.5 apply when at least the camping cell is on a carrier frequency subject to CCA.

When the UE is in either *Camped Normally* state or *Camped on Any Cell* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency, inter-frequency and inter-RAT cells indicated by the serving cell. For intra-frequency and inter-frequency cells the serving cell may provide explicit neighbour list, or only carrier frequency information and bandwidth information. UE measurement activity is also controlled by measurement rules defined in TS 38.304, allowing the UE to limit its measurement activity.

In the requirements of clause 4.2A, the exceptions for side conditions apply as follows:

- for the UE capable of CA, the applicable exceptions for side conditions are specified in Annex B, clause B.x.y for UE supporting CA in FR1.

In the requirements of clause 4.2A.2, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but N candidate SSB positions for the same SS/PBCH block index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding detection, measurement, or evaluation period, where:

- For the cell detection procedure: N is at least one candidate SSB position (NOTE: the one candidate SSB position for the cell detection shall not be impacted by the set of candidate SSB positions which are already being measured by the UE within the current measurement period of the on-going measurements), and
- For other procedures in clause 4.2A.2: N are the first two successive candidate SSB positions when two or more candidate SSB positions are configured for this SSB index in one discovery burst transmission window, otherwise N is one candidate SSB position;

otherwise the SMTC occasion is considered as available at the UE.

4.2A.2 Requirements

4.2A.2.1 UE measurement capability

For idle mode cell re-selection purposes, the UE shall be capable of monitoring at least:

- Intra-frequency carrier, and
- Depending on UE capability, 7 NR inter-frequency carriers, and
- Depending on UE capability, 7 FDD E-UTRA inter-RAT carriers, and
- Depending on UE capability, 7 TDD E-UTRA inter-RAT carriers.

In addition to the requirements defined above, a UE supporting E-UTRA measurements in RRC_IDLE state shall be capable of monitoring a total of at least 14 carrier frequency layers, which includes serving layer, comprising of any above defined combination of E-UTRA FDD, E-UTRA TDD and NR layers. The inter-frequency carriers include carriers on unlicensed band and/or licensed band.

4.2A.2.2 Measurement and evaluation when subject to CCA on the serving cell

The UE shall measure the SS-RSRP and SS-RSRQ level of the serving cell and evaluate the cell selection criterion S defined in TS 38.304 [1] for the serving cell at least once every $(1+M_n)*M1*N1$ DRX cycles in $N_{\text{serv_CCA}}$ consecutive DRX cycles; where:

- $M1=2$ if SMTC periodicity (T_{SMTC}) > 20 ms and DRX cycle ≤ 0.64 second,

- otherwise $M_1=1$.
- $N_1 \cdot M_n$ is the maximum separation in DRX cycles between two measurements that are used for filtering.

The UE shall filter the SS-RSRP and SS-RSRQ measurements of the serving cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by, at least DRX cycle/2 but not separated in time by more than $N_1 \cdot M_n$, where $M_n=2$.

If the UE has evaluated according to Table 4.2A.2.2-1 in N_{serv_CCA} consecutive DRX cycles that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities.

UE shall initiate measurements on neighbour cells indicated by the serving cell if it is unable to measure on the serving cell for at least $N_1 \cdot M_p$ consecutive number of DRX cycles each with at least one SMTC occasion not available at the UE, where $M_p=4$ when DRX cycle length < 1.28 s, $M_p=2$ when DRX cycle length ≥ 1.28 s.

UE shall initiate the measurements on neighbour cells of any intra-frequency or inter-frequency if it is unable to measure on serving cell during at least consecutive $N_1 \cdot M_q$ number of DRX cycles each with at least one SMTC occasion not available at the UE, regardless of any condition of $S_{nonIntraSearchP}$ and $S_{nonIntraSearchQ}$, where $M_q=8$ when DRX cycle length < 1.28 s, $M_q=4$ when DRX cycle length ≥ 1.28 s.

If the UE in RRC_IDLE has not found any new suitable cell based on searches and measurements using the intra-frequency, inter-frequency and inter-RAT information indicated in the system information for 10 s, the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 [1].

Table 4.2A.2.2-1: N_{serv_CCA}

DRX cycle length [s]	Scaling Factor (N1)		Nserv_CCA [number of DRX cycles]
	FR1	FR2-2 ^{Note 3}	
0.32	1	12	N1*M1*(4+ Ms)
0.64		8	N1*M1*(4+ Ms)
1.28		6	N1*(2+Ms)
2.56		5	N1*(2+Ms)
Note 1:	Ms is the number of groups of consecutive N1 DRX cycles each group with at least one SMTC occasion not available at the UE during Nserv_CCA, and Ms< Ms,max		
Note 2:	Ms,max=8 for DRX cycle length < 1.28 s, Ms,max= 4 for DRX cycle length ≥ 1.28 s.		
Note 3:	Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.		

The UE shall restart the measurements used for serving cell evaluation if M_s exceeds $M_{s,max}$.

4.2A.2.3 Measurements of intra-frequency NR cells when subject to CCA on the serving cell and target cell

The UE shall be able to identify new intra-frequency cells with CCA and perform SS-RSRP and SS-RSRQ measurements of the identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

When the intra-frequency measurement is performed on a neighbour cell in FR2-2 with shared spectrum channel access, UE shall determine the CCA mode of the neighbour cell according to *channelAccessMode2-r17* of the cell configured in SIB3. If *channelAccessMode2-r17* of the cell is enabled, UE shall assume that CCA applies to the cell and perform measurement accordingly, and the requirements in clause 4.2A.2.3 shall apply; otherwise, UE shall assume that CCA does not apply to the cell and perform measurement accordingly, and requirements in 4.2.2.3 shall apply.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in TS38.304 within T_{detect,NR_Intra_CCA} when that $T_{reselection} = 0$. An intra frequency cell is considered to be detectable according to the conditions defined in Annex B.1.2A for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $T_{measure,NR_Intra_CCA}$ (see table 4.2A.2.3-1) for intra-frequency cells that are identified and measured according to the measurement rules. For a cell that is already identified, after 2 unsuccessful measurement attempts due to exceeding the maximum number of SMTC occasions not available at the UE, the UE shall detect cells on any of the configured serving- and/or non-serving carriers.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{\text{measure,NR_Intra_CCA}}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined [1] within $T_{\text{evaluate,NR_Intra_CCA}}$ when $T_{\text{reselection}} = 0$ as specified in table 4.2A.2.3-1 provided that:

when *rangeToBestCell* is not configured:

- the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2-2.

when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
- if there are multiple such cells, the cell has the highest rank among them.
- the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2-2 if the current serving cell is among them.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

If $T_{\text{reselection}}$ timer has a non-zero value and the intra-frequency cell is satisfied with the reselection criteria, which are defined in TS38.304 [1], the UE shall evaluate this intra-frequency cell for the $T_{\text{reselection}}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

Table 4.2A.2.3-1: $T_{\text{detect,NR_Intra_CCA}}$, $T_{\text{measure,NR_Intra_CCA}}$ and $T_{\text{evaluate,NR_Intra_CCA}}$

DRX cycle length [s]	Scaling Factor (N1)		T _{detect,NR_Intra_CCA} [s] (number of DRX cycles)	T _{measure,NR_Intra_CCA} [s] (number of DRX cycles)	T _{evaluate,NR_Intra_CCA} [s] (number of DRX cycles)
	FR1	FR2-2 ^{Note 5}			
0.32	1	12	0.32xN1x(36+M _d)xM2 {(36+M _d)xN1xM2}	0.32xN1x(4+M _m)xM2 {(4+M _m)xN1 xM2}	0.32xN1x(16+M _e) x M2 {(16+M _e)xN1xM2}
0.64		8	0.64xN1x(28+M _d) {(28+M _d)xN1 }	0.64xN1x(2+M _m) {(2+M _m)xN1 }	0.64xN1x(8+M _e) {(8+M _e)xN1 }
1.28		6	1.28xN1x(25+M _d) {(25+M _d)xN1 }	1.28xN1x(1+M _m) {(1+M _m)xN1 }	1.28xN1x(5+M _e) {(5+M _e)xN1 }
2.56		5	2.56xN1x(23+M _d) {(23+M _d)xN1 }	2.56xN1x(1+M _m) {(1+M _m)xN1 }	2.56xN1x(3+M _e) {(3+M _e)xN1 }
Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 2: M _d , M _m , M _e are the number of groups of consecutive N1 DRX cycles each group with at least one SMTC occasion not available during the T _{detect,NR_Intra_CCA} , T _{measure,NR_Intra_CCA} and T _{evaluate,NR_Intra_CCA} , and M _m ≤ M _{m,max} , M _d ≤ M _{d,max} and M _e ≤ M _{e,max} Note 3: M _{m,max} = 16 for DRX cycle length = 0.32s; M _{m,max} = 8 for DRX cycle length = 0.64s; M _{m,max} = 4 for DRX cycle length = 1.28s; M _{m,max} = 4 for DRX cycle length = 2.56s. Note 4: M _{d,max} = 4*M _{m,max} , M _{e,max} = 2*M _{m,max} . Note 5: Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.					

The UE shall restart the measurements upon exceeding $M_{m,\text{max}}$, $M_{d,\text{max}}$, or $M_{e,\text{max}}$.

4.2A.2.4 Measurements of inter-frequency NR cells when subject to CCA on the target cell

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP or SS-RSRQ measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

When the inter-frequency measurement is performed on a neighbour cell in FR2-2 with shared spectrum channel access, UE shall determine the CCA mode of the neighbour cell according to *channelAccessMode2-r17* of the cell configured in *SIB4*. If *channelAccessMode2-r17* of the cell is enabled, UE shall assume that CCA applies to the cell and perform measurement accordingly, and the requirements in clause 4.2A.2.4 shall apply; otherwise, UE shall assume that CCA does not apply to the cell and perform measurement accordingly, and requirements in 4.2.2.4 shall apply.

If $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$ then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2A.2.7.

If $S_{rxlev} \leq S_{nonIntraSearchP}$ or $S_{qual} \leq S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-frequency layers of higher, equal or lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below in this clause.

The UE shall be able to evaluate whether a newly detectable inter-frequency cell meets the reselection criteria defined in TS38.304 within $K_{carrier} * T_{detect,NR_Inter} + K_{carrier_CCA} * T_{detect,NR_Inter_CCA}$ if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when $T_{reselection} = 0$ provided that the reselection criteria is met by a margin of at least 5 dB in FR1 or 6.5dB in FR2-2 for reselections based on ranking or 6dB in FR1 or 7.5dB in FR2-2 for SS-RSRP reselections based on absolute priorities or 4dB in FR1 and 4dB in FR2-2 for SS-RSRQ reselections based on absolute priorities. The parameter $K_{carrier}$ is the number of NR inter-frequency carriers on licensed band and $K_{carrier_CCA}$ is the number of NR inter-frequency carriers on unlicensed band indicated by the serving cell. An inter-frequency cell is considered to be detectable according to the conditions defined in Annex B.1.3A for a corresponding Band.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,NR_Inter_CCA}$. If after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure SS-RSRP or SS-RSRQ at least every $K_{carrier} * T_{measure,NR_Inter} + K_{carrier_CCA} * T_{measure,NR_Inter_CCA}$ for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

For a cell that is already identified, after 2 unsuccessful measurement attempts due to exceeding the maximum number of SMTC occasions not available at the UE, the UE shall detect cells on any of the configured serving- and/or non-serving carriers.

The UE shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Inter_CCA}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 within $K_{carrier} * T_{evaluate,NR_Inter} + K_{carrier_CCA} * T_{evaluate,NR_Inter_CCA}$ when $T_{reselection} = 0$ as specified in table 4.2A.2.4-1 provided that the reselection criteria is met by

- the condition when performing equal priority reselection and when *rangeToBestCell* is not configured:
 - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2-2 or.

when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
- if there are multiple such cells, the cell has the highest rank among them
- the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2-2 if the current serving cell is among them. or
- 6dB in FR1 or 7.5dB in FR2-2 for SS-RSRP reselections based on absolute priorities or
- 4dB in FR1 or 4dB in FR2-2 for SS-RSRQ reselections based on absolute priorities.

When evaluating cells for reselection, the SSB side conditions apply to both serving and inter-frequency cells.

If $T_{\text{reselection}}$ timer has a non zero value and the inter-frequency cell is satisfied with the reselection criteria, the UE shall evaluate this inter-frequency cell for the $T_{\text{reselection}}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

The UE is not expected to meet the measurement requirements for an inter-frequency carrier under DRX cycle=320 ms defined in Table 4.2A.2.4-1 under the following conditions:

- $T_{\text{SMTC_intra}} = T_{\text{SMTC_inter}} = 160$ ms; where $T_{\text{SMTC_intra}}$ and $T_{\text{SMTC_inter}}$ are periodicities of the SMTC occasions configured for the intra-frequency carrier and the inter-frequency carrier respectively, and
- SMTC occasions configured for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the SMTC occasions configured for the intra-frequency carrier, and
- SMTC occasions configured for the intra-frequency carrier and for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the paging occasion [1].

Table 4.2A.2.4-1: $T_{\text{detect,NR_Inter_CCA}}$, $T_{\text{measure,NR_Inter_CCA}}$ and $T_{\text{evaluate,NR_Inter_CCA}}$

DRX cycle length [s]	Scaling Factor (N1)		T _{detect,NR_Inter_CCA} [s] (number of DRX cycles)	T _{measure,NR_Inter_CCA} [s] (number of DRX cycles)	T _{evaluate,NR_Inter_CCA} [s] (number of DRX cycles)
	FR1	FR2-2 ^{Note 5}			
0.32	1	12	0.32xN1x(36+M _d)xM2 {(36+M _d)xN1xM2}	0.32xN1x(4+M _m) xM2 {(4+M _m)xN1xM2}	0.32xN1x(16+M _e) x M2 {(16+M _e)xN1 xM2}
0.64		8	0.64xN1x(28+M _d) {(28+M _d)xN1 }	0.64xN1x(2+M _m) {(2+M _m)xN1 }	0.64xN1x(8+M _e) {(8+M _e)xN1 }
1.28		6	1.28xN1x(25+M _d) {(25+M _d)xN1 }	1.28xN1x(1+M _m) {(1+M _m)xN1 }	1.28xN1x(5+M _e) {(5+M _e)xN1 }
2.56		5	2.56xN1x(23+M _d) {(23+M _d)xN1 }	2.56xN1x(1+M _m) {(1+M _m)xN1 }	2.56xN1x(3+M _e) {(3+M _e)xN1 }
Note 1:	M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.				
Note 2:	M _d , M _m , M _e are the number of groups of consecutive N1 DRX cycles each group with at least one SMTC occasion not available at the UE during T _{detect,NR_Inter_CCA} , T _{measure,NR_Inter_CCA} and T _{evaluate,NR_Inter_CCA} , and M _m ≤ M _{m,max} , M _d ≤ M _{d,max} and M _e ≤ M _{e,max}				
Note 3:	M _{m,max} = 16 for DRX cycle length = 0.32s; M _{m,max} = 8 for DRX cycle length = 0.64s; M _{m,max} = 4 for DRX cycle length = 1.28s; M _{m,max} = 4 for DRX cycle length = 2.56s				
Note 4:	M _{d,max} = 4*M _{m,max} , M _{e,max} = 2*M _{m,max} .				
Note 5:	Applies for UE supporting FR2-2 power class 2&3. For UE supporting FR2-2 power class 1, N1 = 12 for all DRX cycle length.				

The UE shall restart the measurements upon exceeding $M_{m,\text{max}}$, $M_{d,\text{max}}$, or $M_{e,\text{max}}$.

4.2A.2.5 Measurements of inter-RAT E-UTRAN cells when subject to CCA on the serving cell

The requirements in clause 4.2.2.5 shall apply.

4.2A.2.6 Maximum interruption in paging reception when subject to CCA on the target cell

UE shall perform the cell re-selection with minimum interruption in monitoring downlink channels for paging reception.

At intra-frequency and inter-frequency cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels of the target intra-frequency and inter-frequency cell for paging reception. The interruption time shall not exceed $T_{SI,CCA} + 2 \cdot T_{\text{target_cell_SMTC_period}}$.

At inter-RAT cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels for paging reception of the target inter-RAT cell. For NR to E-UTRAN cell re-selection the interruption time shall not exceed $T_{SI-EUTRA} + 55$ ms.

$T_{SI,CCA}$ is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [2] for an NR cell.

$T_{SI-EUTRA}$ is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 36.331 [16] for an E-UTRAN cell.

These requirements assume sufficient radio conditions, so that decoding of system information can be made without errors and does not take into account cell re-selection failure.

4.2A.2.7 General requirements

The requirements in clause 4.2.2.7 shall apply.

4.2B Cell Re-selection for RedCap

4.2B.1 Introduction

The terms SSB and SMTC in this clause apply to CD-SSB only if not specified otherwise.

The 1 Rx RedCap UE for performing the cell reselection procedure [1] applies:

- $Q_{rxlevmin}$ as the signaled value of $Q_{rxlevmin}$ [2] -1 dB.
- $Q_{qualmin}$ as the signaled value of $Q_{qualmin}$ [2] -1 dB.

4.2B.2 Requirements

4.2B.2.1 UE measurement capability for RedCap

4.2B.2.1.1 UE measurement capability for 1 Rx RedCap

For idle mode cell re-selection purposes, and for UE supporting *IdleInactiveMeasurements-r16* or *idleInactiveEUTRA-MeasReport-r16*, the UE shall be capable of monitoring at least:

- Intra-frequency carrier, and
- Depending on UE capability, 6 NR inter-frequency carriers, and
- Depending on UE capability, 6 FDD E-UTRA inter-RAT carriers, and
- Depending on UE capability, 6 TDD E-UTRA inter-RAT carriers.

In addition to the requirements defined above, a UE supporting E-UTRA measurements in RRC_IDLE state shall be capable of monitoring a total of at least 11 carrier frequency layers, which includes serving layer, comprising of any above defined combination of E-UTRA FDD, E-UTRA TDD and NR layers.

4.2B.2.1.2 UE measurement capability for 2 Rx RedCap

The capability defined in section 4.2.2.1 apply for this section.

4.2B.2.2 Measurement and evaluation of serving cell for RedCap UE

The UE shall measure the SS-RSRP and SS-RSRQ level of the serving cell and evaluate the cell selection criterion S defined in TS 38.304 [1] for the serving cell at least once every $M1 \cdot N1$ DRX cycle; where:

- $M1=2$ if SMTC periodicity (T_{SMTC}) > 20 ms and DRX cycle ≤ 0.64 second,
- otherwise $M1=1$.

The UE shall filter the SS-RSRP and SS-RSRQ measurements of the serving cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by, at least eDRX_IDLE cycle/2, if the UE is configured with eDRX cycle ≤ 10.24 s; otherwise DRX cycle/2.

If the UE is not configured with eDRX_IDLE cycle and the UE has evaluated according to Table 4.2B.2.2-1 for both 1Rx RedCap and 2Rx RedCap in N_{serv_RedCap} consecutive DRX cycles that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities. In this case the UE shall not relax measurements on any of the neighbour cells even if UE has fulfilled the criteria for meeting the relaxed measurement requirements defined clauses 4.2B.2.9.3, 4.2B.2.9.5, 4.2B.2.9.6, 4.2B.2.9.7, 4.2B.2.10.3, 4.2B.2.10.5, 4.2B.2.10.6, 4.2B.2.10.7, 4.2B.2.11.3, 4.2B.2.11.5, 4.2B.2.11.6, and 4.2B.2.11.7.

If the UE is configured with eDRX_IDLE cycle and has evaluated, according to Table 4.2B.2.2-2 or Table 4.2B.2.2-3, in N_{serv_RedCap} consecutive eDRX cycles if eDRX_IDLE cycle ≤ 10.24 s, otherwise N_{serv_RedCap} consecutive DRX cycles within a single PTW that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities. In this case the UE shall not relax measurements on any of the neighbour cells even if UE has fulfilled the criteria for meeting the relaxed measurement requirements defined clauses 4.2B.2.9.3, 4.2B.2.9.5, 4.2B.2.9.6, 4.2B.2.9.7, 4.2B.2.10.3, 4.2B.2.10.5, 4.2B.2.10.6, 4.2B.2.10.7, 4.2B.2.11.3, 4.2B.2.11.5, 4.2B.2.11.6, and 4.2B.2.11.7.

For the UE configured with eDRX_IDLE cycle, N_{serv_RedCap} is specified in Table 4.2B.2.2-2 for 1 Rx RedCap and 2 Rx RedCap in FR1 and in Table 4.2B.2.2-3 for FR2 for 2 Rx RedCap.

If the UE in RRC_IDLE has not found any new suitable cell based on searches and measurements using the intra-frequency, inter-frequency and inter-RAT information indicated in the system information during the time T, the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 [1], where

- $T=10$ s if the UE is not configured with eDRX_IDLE cycle, or
- $T=MAX(10$ s, one eDRX_IDLE cycle) if the UE is configured with eDRX_IDLE cycle in FR1, or
- $T=MAX(10$ s, $N1 \cdot eDRX_IDLE$ cycle) if the UE is configured with eDRX_IDLE cycle less than 20.48s in FR2,
- Otherwise, $T=MAX(10$ s, one eDRX_IDLE cycle) if the UE is configured with eDRX_IDLE cycle no less than 20.48 s in FR2

Table 4.2B.2.2-1: N_{serv_RedCap}

DRX cycle length [s]	Scaling Factor (N1)		N _{serv_RedCap} [number of DRX cycles]
	FR1	FR2 ^{Note1}	
0.32	1	8	M1*N1*4
0.64		5	M1*N1*4
1.28		4	N1*2
2.56		3	N1*2
Note 1: Applies for RedCap UE of all FR2 power class.			

Table 4.2B.2.2-2: $N_{\text{serv_RedCap}}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1)	Nserv_RedCap [number of DRX or eDRX cycles ^{Note 3}]
2.56	N/A	N/A	1	N1*2
5.12	N/A	N/A		N1*2
10.24	N/A	N/A		N1*2
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥[1.28] (1)		N1*M1*2
	0.64	≥ 1.28 (1) (M1=1) or ≥ 2.56 (2) (M1=2)		N1*M1*2
	1.28	≥2.56 (2)		N1*2
	2.56	≥5.12 (4)		N1*2
NOTE 1: The number of DRX cycles in this table corresponds to the DRX cycles within PTWs, when PTW is configured.				
NOTE 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].				
NOTE 3: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles.				
NOTE 4: The lower bound of PTW length is derived based on				
Nserv_RedCap *DRX_cycle 1.28 * 1.28.				

Table 4.2B.2.2-3: $N_{\text{serv_RedCap}}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) ^{Note1}	$N_{\text{serv_RedCap}}$ [number of DRX or eDRX cycles ^{Note 4}]
2.56	N/A	N/A	3	$N1*2$
5.12	N/A	N/A	3	$N1*2$
10.24	N/A	N/A	3	$N1*2$
$20.48 \leq \text{eDRX_IDLE cycle length} \leq 10485.76$	0.32	$\geq 5.12 (4)$	8	$N1*2$
	0.64	$\geq 6.4 (5)$	5	$N1*2$
	1.28	$\geq 10.24 (8)$	4	$N1*2$
	2.56	$\geq 15.36 (12)$	3	$N1*2$
NOTE 1: Applies for RedCap UE of all FR2 power class. NOTE 2: The number of DRX cycles in this table corresponds to the DRX cycles within PTWs, when PTW is configured. NOTE 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39]. NOTE 4: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles. NOTE 5: The lower bound of PTW length is derived based on $\left\lceil \frac{N_{\text{serv_RedCap}} * \text{DRX_cycle}}{1.28} \right\rceil * 1.28$. NOTE 6: When eDRX=20.48s and DRX=0.32s, UE is allowed to perform cell evaluation within PTW in every 2 eDRX cycles.				

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

4.2B.2.3 Measurements of intra-frequency NR cells for RedCap UE

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP and SS-RSRQ measurements of the identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in TS 38.304 [1] within $T_{\text{detect,NR_Intra_RedCap}}$ when that $T_{\text{reselection}} = 0$. An intra frequency cell is considered to be detectable according to the conditions defined in Annex B.1.4 for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $T_{\text{measure,NR_Intra_RedCap}}$ for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{\text{measure,NR_Intra_RedCap}}/2$.

The UE shall not consider an NR neighbour cell for cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined in TS 38.304 [1] within $T_{\text{evaluate,NR_Intra_RedCap}}$ when $T_{\text{reselection}} = 0$ provided that:

when *rangeToBestCell* is not configured:

- the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2 for 2 Rx RedCap.
- the cell is at least 4dB better ranked in FR1 for 1 Rx RedCap.

when *rangeToBestCell* is configured:

- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS 38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
- if there are multiple such cells, the cell has the highest rank among them.
 - the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2 if the current serving cell is among them for 2 Rx RedCap.
 - the cell is at least 4dB better ranked in FR1 if the current serving cell is among them for 1 Rx RedCap.

The 1 Rx RedCap UE applies *absThreshSS-BlocksConsolidation* as the signaled value of *absThreshSS-BlocksConsolidation* [2] + 1 dB.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

If the $T_{\text{reselection}}$ timer has a non-zero value and an intra-frequency cell satisfies with the reselection criteria which are defined in TS 38.304 [1], the UE shall evaluate this intra-frequency cell for the $T_{\text{reselection}}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect to this cell.

For both 1Rx RedCap and 2Rx RedCap not configured with eDRX_IDLE cycle, $T_{\text{detect,NR_Intra_RedCap}}$, $T_{\text{measure,NR_Intra_RedCap}}$ and $T_{\text{evaluate,NR_Intra_RedCap}}$ are specified in Table 4.2B.2.3-1

For 1 Rx RedCap and 2 Rx RedCap configured with eDRX_IDLE cycle, $T_{\text{detect,NR_Intra_RedCap}}$, $T_{\text{measure,NR_Intra_RedCap}}$ and $T_{\text{evaluate,NR_Intra_RedCap}}$ are specified in Table 4.2B.2.3-2 and Table 4.2B.2.3-3 for FR1 and FR2 respectively, where the requirements apply provided that the serving cell is configured with eDRX_IDLE and the DRX cycle length is same in all PTWs during any of $T_{\text{detect,NR_Intra_RedCap}}$, $T_{\text{measure,NR_Intra_RedCap}}$ and $T_{\text{evaluate,NR_Intra_RedCap}}$ when multiple PTWs are used.

Table 4.2B.2.3-1: $T_{\text{detect,NR_Intra_RedCap}}$, $T_{\text{measure,NR_Intra_RedCap}}$ and $T_{\text{evaluate,NR_Intra_RedCap}}$

DRX cycle length [s]	Scaling Factor (N1)		$T_{\text{detect,NR_Intra_RedCap}}$ [s] (number of DRX cycles)	$T_{\text{measure,NR_Intra_RedCap}}$ [s] (number of DRX cycles)	$T_{\text{evaluate,NR_Intra_RedCap}}$ [s] (number of DRX cycles)
	FR1	FR2 ^{Note1}			
0.32	1	8	$11.52 \times N1 \times M2$ ($36 \times N1 \times M2$)	$1.28 \times N1 \times M2$ ($4 \times N1 \times M2$)	$5.12 \times N1 \times M2$ ($16 \times N1 \times M2$)
0.64		5	$17.92 \times N1$ ($28 \times N1$)	$1.28 \times N1$ ($2 \times N1$)	$5.12 \times N1$ ($8 \times N1$)

1.28	4	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56	3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
Note 1: Applies for RedCap UE of all FR2 power class. Note 2: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{\text{detect, NR_intra_RedCap}}$ is expected.				

Table 4.2B.2.3-2: $T_{\text{detect, NR_intra_RedCap}}$, $T_{\text{measure, NR_intra_RedCap}}$ and $T_{\text{evaluate, NR_intra_RedCap}}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Tdetect,NR_Intra_RedCap [s] (number of DRX cycles or eDRX cycles ^{Note 3)}	Tmeasure,NR_Intra_RedCap [s] (number of DRX cycles or eDRX cycles ^{Note 3)}	Tevaluate,NR_Intra_RedCap [s] (number of DRX cycles or eDRX cycles ^{Note 3)}
2.56	-	-	58.88 (23)	2.56 (1)	7.68 (3)
5.12	-	-	117.76 (23)	5.12 (1)	10.24 (2)
10.24	-	-	235.52 (23)	10.24 (1)	20.48 (2)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥1.28 ([1])	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ (23)	0.32 x M2 (1 x M2)	0.64 x M2 (2 x M2)
	0.64	≥1.28 ([1])		0.64 (1)	1.28 (2)
	1.28	≥2.56 ([2])		1.28 (1)	2.56 (2)
	2.56	≥5.12 ([4])		2.56 (1)	5.12 (2)
Note 1:	The number of DRX cycles in this table corresponds to for the DRX cycles within PTWs, when PTW is configured.				
Note 2:	The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].				
Note 3:	Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles.				
Note 4:	The lower bound of PTW length is derived based on $\left\lceil \frac{Tevaluate,NR_Intra_RedCap \times DRX_cycle}{1.28} \right\rceil * 1.28$.				
Note 5:	M2 = 2 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.				

Table 4.2B.2.3-3: $T_{\text{detect, NR_intra_RedCap}}$, $T_{\text{measure, NR_intra_RedCap}}$ and $T_{\text{evaluate, NR_intra_RedCap}}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) ^{Note 1}	$T_{\text{detect, NR_intra_RedCap}}$ [s] (number of DRX cycles or eDRX cycles ^{Note 4})	$T_{\text{measure, NR_intra_RedCap}}$ [s] (number of DRX cycles or eDRX cycles ^{Note 4})	$T_{\text{evaluate, NR_intra_RedCap}}$ [s] (number of DRX cycles or eDRX cycles ^{Note 4})
2.56	-	-	3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
5.12	-	-	3	117.76 x N1 (23 x N1)	5.12 x N1 (1 x N1)	10.24 x N1 (2 x N1)

10.24	-	-	3	235.52 x N1 (23 x N1)	10.24 x N1 (1 x N1)	20.48 x N1 (2 x N1)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥5.12 (4)	8	$eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1)	0.32 x N1 (1 x N1)	0.64 x N1 (2 x N1)
	0.64	≥6.4 (5)	5		0.64 x N1 (1 x N1)	1.28 x N1 (2 x N1)
	1.28	≥10.24 (8)	4		1.28 x N1 (1 x N1)	2.56 x N1 (2 x N1)
	2.56	≥15.36 (12)	3		2.56 x N1 (1 x N1)	5.12 x N1 (2 x N1)

NOTE 1: Applies for RedCap UE of all power class.

NOTE 2: The number of DRX cycles in this table corresponds to for the DRX cycles within PTWs, when PTW is configured.

NOTE 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].

NOTE 4: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles.

NOTE 5: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Intra_RedCap} \times DRX_cycle}{1.28} \right\rceil * 1.28$.

NOTE 6: When eDRX=20.48s and DRX=0.32s, UE is allowed to perform cell evaluation within PTW in every 2 eDRX cycles.

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

4.2B.2.4 Measurements of inter-frequency NR cells for RedCap UE

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP or SS-RSRQ measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$ then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7.

If $S_{rxlev} \leq S_{nonIntraSearchP}$ or $S_{qual} \leq S_{nonIntraSearchQ}$ then the UE shall search for and measure inter-frequency layers of higher, equal, or lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below in this clause.

The UE shall be able to evaluate whether a newly detectable inter-frequency cell meets the reselection criteria defined in TS 38.304 [1] within $K_{carrier_RedCap} \times T_{detect,NR_Inter_RedCap}$ if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when $T_{reselection} = 0$ provided that the reselection criteria is met

For 2 Rx RedCap by a margin of at least

- 5 dB in FR1 or 6.5 dB in FR2 for reselections based on ranking or
- 6 dB in FR1 or 7.5 dB in FR2 for SS-RSRP reselections based on absolute priorities or
- 4 dB in FR1 and 4 dB in FR2 for SS-RSRQ reselections based on absolute priorities

For 1 Rx RedCap by a margin of at least

- 6 dB in FR1 for reselections based on ranking or
- 7 dB in FR1 for SS-RSRP reselections based on absolute priorities or
- 5 dB in FR1 for SS-RSRQ reselections based on absolute priorities.

The parameter $K_{\text{carrier_RedCap}}$ is the number of NR inter-frequency carriers indicated by the serving cell. An inter-frequency cell is considered to be detectable according to the conditions defined in Annex B.1.5 for a corresponding Band. When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{\text{measure,NR_Inter_RedCap}}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure SS-RSRP or SS-RSRQ at least every $K_{\text{carrier_RedCap}} * T_{\text{measure,NR_Inter_RedCap}}$ for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{\text{measure,NR_Inter}}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 [1] within $K_{\text{carrier}} * T_{\text{evaluate,NR_Inter_RedCap}}$ when $T_{\text{reselection}} = 0$ provided that the reselection criteria is met by

- the condition when performing equal priority reselection and
 - when *rangeToBestCell* is not configured:
 - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 for 2 Rx RedCap.
 - the cell is at least 6dB better ranked in FR1 for 1 Rx RedCap.
 - when *rangeToBestCell* is configured:
 - the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value defined in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
 - if there are multiple such cells, the cell has the highest rank among them
 - the cell is at least 5dB better ranked in FR1 or 6.5dB better ranked in FR2 if the current serving cell is among them, or 6dB in FR1 or 7.5dB in FR2 for SS-RSRP reselections based on absolute priorities for 2 Rx RedCap or 4dB in FR1 or 4dB in FR2 for SS-RSRQ reselections based on absolute priorities for 2 Rx RedCap.
 - the cell is at least 6dB better ranked in FR1 if the current serving cell is among them, or [7dB] in FR1 for SS-RSRP reselections based on absolute priorities or [5dB] in FR1 for SS-RSRQ reselections based on absolute priorities for 1 Rx RedCap.

The 1 Rx RedCap UE applies *absThreshSS-BlocksConsolidation* as the signaled value of *absThreshSS-BlocksConsolidation* [2] + 1 dB.

When evaluating cells for reselection, the SSB side conditions apply to both serving and inter-frequency cells.

If the $T_{\text{reselection}}$ timer has a non-zero value and the inter-frequency cell satisfies with the reselection criteria, the UE shall evaluate this inter-frequency cell for the $T_{\text{reselection}}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect to this cell.

The UE is not expected to meet the measurement requirements for an inter-frequency carrier under DRX cycle=320 ms defined in Table 4.2B.2.4-1 for both 1Rx RedCap and 2Rx RedCap under the following conditions:

- $T_{\text{SMTC_intra}} = T_{\text{SMTC_inter}} = 160$ ms; where $T_{\text{SMTC_intra}}$ and $T_{\text{SMTC_inter}}$ are periodicities of the SMTC occasions configured for the intra-frequency carrier and the inter-frequency carrier respectively, and

- SMTC occasions configured for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the SMTC occasions configured for the intra-frequency carrier, and
- SMTC occasions configured for the intra-frequency carrier and for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the paging occasion defined in TS38.304 [1].

For 1 Rx RedCap and 2 Rx RedCap not configured with eDRX_IDLE cycle, $T_{\text{detect,NR_Inter_RedCap}}$, $T_{\text{measure,NR_Inter_RedCap}}$ and $T_{\text{evaluate,NR_Inter_RedCap}}$ are specified in Table 4.2B.2.4.1-1.

For 1 Rx RedCap and 2 Rx RedCap configured with eDRX_IDLE cycle, $T_{\text{detect,NR_Inter_RedCap}}$, $T_{\text{measure,NR_Inter_RedCap}}$ and $T_{\text{evaluate,NR_Inter_RedCap}}$ are specified in Table 4.2B.2.4-2 and Table 4.2B.2.4-3 for FR1 and FR2 respectively. The requirements apply provided that the serving cell is configured with eDRX_IDLE and the DRX cycle length is same in all PTWs during any of $T_{\text{detect,NR_Inter_RedCap}}$, $T_{\text{measure,NR_Inter_RedCap}}$ and $T_{\text{evaluate,NR_Inter_RedCap}}$ when multiple PTWs are used.

Table 4.2B.2.4-1: $T_{\text{detect,NR_Inter_RedCap}}$, $T_{\text{measure,NR_Inter_RedCap}}$ and $T_{\text{evaluate,NR_Inter_RedCap}}$

DRX cycle length [s]	Scaling Factor (N1)		T _{detect,NR_Inter_RedCap} [s] (number of DRX cycles)	T _{measure,NR_Inter_RedCap} [s] (number of DRX cycles)	T _{evaluate,NR_Inter_RedCap} [s] (number of DRX cycles)
	FR1	FR2 ^{Note1}			
0.32	1	8	11.52 x N1 x 1.5 (36 x N1 x 1.5)	1.28 x N1 x 1.5 (4 x N1 x 1.5)	5.12 x N1 x 1.5 (16 x N1 x 1.5)
0.64		5	17.92x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		4	32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
Note 1: Applies for RedCap UE of all FR2 power class.					

Table 4.2B.2.4-2: $T_{\text{detect,NR_Inter_RedCap}}$, $T_{\text{measure,NR_Inter_RedCap}}$ and $T_{\text{evaluate,NR_Inter_RedCap}}$ for UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	T _{detect,NR_Inter_RedCap} [s] (number of DRX cycles or eDRX cycles ^{Note 3})	T _{measure,NR_Inter_RedCap} [s] (number of DRX cycles or eDRX cycles ^{Note 3})	T _{evaluate,NR_Inter_RedCap} [s] (number of DRX cycles or eDRX cycles ^{Note 3})
2.56	-	-	58.88 (23)	2.56 (1)	7.68 (3)
5.12	-	-	117.76 (23)	5.12 (1)	10.24 (2)
10.24	-	-	235.52 (23)	10.24 (1)	20.48 (2)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥1.28 (1)	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil$ (23)	0.32 x 1.5 (1 x 1.5)	0.64 x 1.5 (2 x 1.5)
	0.64	≥1.28 (1)		0.64 (1)	1.28 (2)
	1.28	≥2.56 (2)		1.28 (1)	2.56 (2)
	2.56	≥5.12 (4)		2.56 (1)	5.12 (2)
NOTE 1: The number of DRX cycles in this table corresponds to for the DRX cycles within PTWs, when PTW is configured.					
NOTE 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].					
NOTE 3: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles.					
NOTE 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,NR_Inter_RedCap}} \times \text{DRX_cycle}}{1.28} \right\rceil * 1.28$.					

Table 4.2B.2.4-3: $T_{\text{detect,NR_Inter_RedCap}}$, $T_{\text{measure,NR_Inter_RedCap}}$ and $T_{\text{evaluate,NR_Inter_RedCap}}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	Tdetect,NR_Inter_RedCap [s] (number of DRX cycles or eDRX cycles Note 3)	Tmeasure,NR_Inter_Red Cap [s] (number of DRX cycles or eDRX cycles Note 3)	Tevaluate,NR_Inter_Re dCap [s] (number of DRX cycles or eDRX cycles Note 3)
2.56	-	-	3	58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
5.12	-	-	3	117.76 x N1 (23 x N1)	5.12 x N1 (1 x N1)	10.24 x N1 (2 x N1)
10.24	-	-	3	235.52 x N1 (23 x N1)	10.24 x N1 (1 x N1)	20.48 x N1 (2 x N1)
20.48 ≤ eDRX_IDLE cycle length ≤10485.76	0.32	≥5.12 (4)	8	$eDRX_cycle_length$ $\times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1)	0.32 x N1 (1 x N1)	0.64 x N1 (2 x N1)
	0.64	≥6.4 (5)	5		0.64 x N1 (1 x N1)	1.28 x N1 (2 x N1)
	1.28	≥10.24 (8)	4		1.28 x N1 (1 x N1)	2.56 x N1 (2 x N1)
	2.56	≥15.36 (12)	3		2.56 x N1 (1 x N1)	5.12 x N1 (2 x N1)
NOTE 1: Applies for RedCap UE of all power class. NOTE 2: The number of DRX cycles in this table corresponds to for the DRX cycles within PTWs, when PTW is configured. NOTE 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39]. NOTE 4: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s and 10.24s. Otherwise, number of DRX cycles. NOTE 5: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Inter_RedCap} \times DRX_cycle}{1.28} \right\rceil \times 1.28$. NOTE 6: When eDRX=20.48s and DRX=0.32s, UE is allowed to perform cell evaluation within PTW in every 2 eDRX cycles.						

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

4.2B.2.5 Measurements of inter-RAT E-UTRAN cells for RedCap UE

If $S_{\text{rxlev}} > S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} > S_{\text{nonIntraSearchQ}}$ then the UE shall search for inter-RAT E-UTRAN layers of higher priority at least every $T_{\text{higher_priority_search}}$ where $T_{\text{higher_priority_search}}$ is described in clause 4.2B.2.7.

If $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$ then the UE shall search for and measure inter-RAT E-UTRAN layers of higher, lower priority in preparation for possible reselection. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority inter-RAT E-UTRAN layers shall be the same as that defined below for lower priority RATs.

The requirements in this clause apply to inter-RAT E-UTRAN FDD measurements and E-UTRA TDD measurements. When the measurement rules indicate that inter-RAT E-UTRAN cells are to be measured, the UE shall measure RSRP and RSRQ of detected E-UTRA cells in the neighbour frequency list at the minimum measurement rate specified in this clause.

The parameter $N_{\text{EUTRA_carrier_RedCap}}$ is the total number of configured E-UTRA carriers in the neighbour frequency list. The UE shall filter RSRP and RSRQ measurements of each measured E-UTRA cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{\text{measure,EUTRAN_RedCap}}/2$.

An inter-RAT E-UTRA cell is considered to be detectable provided the following conditions are fulfilled:

- the same conditions as for inter-frequency RSRP measurements specified in TS 36.133 [15, Annex B.1.2] are fulfilled for a corresponding Band, and
- the same conditions as for inter-frequency RSRQ measurements specified in TS 36.133 [15, Annex B.1.2] are fulfilled for a corresponding Band.
- SCH conditions specified in TS 36.133 [15, Annex B.1.2] are fulfilled for a corresponding Band

The UE shall be able to evaluate whether a newly detectable inter-RAT E-UTRAN cell meets the reselection criteria defined in TS38.304 [1] within $(N_{\text{EUTRA_carrier_RedCap}}) * T_{\text{detect,EUTRAN_RedCap}}$ when $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$ when $T_{\text{reselction}} = 0$ provided that the reselection criteria are met by a margin of at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities for 2 Rx RedCap and at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities for 1 Rx RedCap.

Cells which have been detected shall be measured at least every $(N_{\text{EUTRA_carrier_RedCap}}) * T_{\text{measure,EUTRAN_RedCap}}$ when $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{\text{measure,EUTRAN_RedCap}}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell.

If the UE detects on an inter-RAT E-UTRAN carrier, a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall not consider an inter-RAT E-UTRA cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For a cell that has been already detected, but has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that an already identified inter-RAT E-UTRA cell has met reselection criterion defined in TS 38.304 [1] within $(N_{\text{EUTRA_carrier_RedCap}}) * T_{\text{evaluate,EUTRAN_RedCap}}$ when $T_{\text{reselction}} = 0$ provided that the reselection criteria are met by a margin of at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities for 2 Rx RedCap and at least 6dB for RSRP reselections based on absolute priorities or 4dB for RSRQ reselections based on absolute priorities for 1 Rx RedCap.

If the $T_{\text{reselction}}$ timer has a non-zero value and the inter-RAT E-UTRA cell satisfies with the reselection criteria defined in TS 38.304 [1], the UE shall evaluate this E-UTRA cell for the $T_{\text{reselction}}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect to this cell.

For 1 Rx RedCap and 2 Rx RedCap not configured with eDRX_IDLE cycle, $T_{\text{detect,EUTRAN_RedCap}}$, $T_{\text{measure,EUTRAN_RedCap}}$ and $T_{\text{evaluate, E-UTRAN_RedCap}}$ are specified in Table 4.2B.2.5-1.

For 1 Rx RedCap and 2 Rx RedCap configured with eDRX_IDLE cycle, $T_{\text{detect,EUTRAN_RedCap}}$, $T_{\text{measure,EUTRAN_RedCap}}$ and $T_{\text{evaluate, E-UTRAN_RedCap}}$ are specified in Table 4.2B.2.5-2, where the requirements apply provided that the serving cell is configured with eDRX_IDLE and the DRX cycle length is the same in all PTWs during any of $T_{\text{detect,EUTRAN_RedCap}}$, $T_{\text{measure,EUTRAN_RedCap}}$ and $T_{\text{evaluate, E-UTRAN_RedCap}}$ when multiple PTWs are used.

Table 4.2B.2.5-1: $T_{\text{detect,EUTRAN_RedCap}}$, $T_{\text{measure,EUTRAN_RedCap}}$, and $T_{\text{evaluate,EUTRAN_RedCap}}$

DRX cycle length [s]	$T_{\text{detect,EUTRAN_RedCap}}$ [s] (number of DRX cycles)	$T_{\text{measure,EUTRAN_RedCap}}$ [s] (number of DRX cycles)	$T_{\text{evaluate,EUTRAN_RedCap}}$ [s] (number of DRX cycles)
0.32	11.52 (36)	1.28 (4)	5.12 (16)
0.64	17.92 (28)	1.28 (2)	5.12 (8)
1.28	32(25)	1.28 (1)	6.4 (5)
2.56	58.88 (23)	2.56 (1)	7.68 (3)

Table 4.2B.2.5-2: $T_{\text{detect,EUTRAN_RedCap}}$, $T_{\text{measure,EUTRAN_RedCap}}$, and $T_{\text{evaluate,EUTRAN_RedCap}}$ for UE configured with eDRX_IDLE cycle

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{\text{detect,EUTRAN_RedCap}}$ [s] (number of DRX or eDRX cycles ^{Note 3})	$T_{\text{measure,EUTRAN_RedCap}}$ [s] (number of DRX or eDRX cycles ^{Note 3})	$T_{\text{evaluate,EUTRAN_RedCap}}$ [s] (number of DRX or eDRX cycles ^{Note 3})
2.56	N/A	N/A	58.88 (23)	2.56 (1)	7.68 (3)
5.12	N/A	N/A	117.76 (23)	5.12 (1)	10.24 (2)
10.24	N/A	N/A	235.52 (23)	10.24 (1)	20.48 (2)
20.48 ≤ eDRX_IDLE cycle length ≤ 10485.76	0.32	≥1.28 (1)	$eDRX_cycle_length \times \left\lceil \frac{23}{\left\lceil PTW / DRX_cycle_length \right\rceil} \right\rceil$ (23)	0.32 (1)	0.64 (2)
	0.64	≥1.28 (1)		0.64 (1)	1.28 (2)
	1.28	≥2.56 (2)		1.28 (1)	2.56 (2)
	2.56	≥5.12 (4)		2.56 (1)	5.12 (2)
NOTE 1: The number of DRX cycles in this table corresponds to for the DRX cycles within PTWs, if PTW is configured. NOTE 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39]. NOTE 3: Number of eDRX cycles when eDRX_IDLE cycle length equals 2.56s, 5.12s, and 10.24s; number of DRX cycles otherwise. NOTE 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,EUTRAN_RedCap}} \cdot DRX_cycle}{1.28} \right\rceil * 1.28$. NOTE 5: When eDRX=20.48s and DRX=0.32s, UE is allowed to perform cell evaluation within PTW in every 2 eDRX cycles.					

For any requirement in this section, when the UE transitions between any two states when being configured with eDRX_IDLE, changing eDRX_IDLE cycle length, or changing PTW configuration, the UE shall meet the transition requirement, which is the less stringent requirement of the two requirements corresponding to the first state and the second state, during the transition time interval which is the time corresponding to the transition requirement. After the transition time interval, the UE shall meet the requirement corresponding to the second state.

4.2B.2.6 Maximum interruption in paging reception for RedCap

The FDD, HD-FDD and TDD RedCap UE shall meet all applicable requirements specified in clause 4.2.2.6. In addition, when the UE is configured with eDRX_IDLE cycle, the UE shall not miss any paging in a PTW provided the paging is sent in at least 2 DRX cycles before the end of that PTW.

The 1 Rx RedCap in HD-FDD shall meet all applicable requirements specified in clause 4.2.2.6 under the following conditions

- at least 1 SSB is available at the UE in the serving cell during the last 160 ms duration.

4.2B.2.7 General requirements for RedCap

The requirements defined in section 4.2.2.7 apply for this section.

4.2B.2.8 Minimum requirement at transitions

When switching from:

- low mobility scenario to stationary scenario, or
- from low mobility scenario to stationary and not-at-cell-edge scenario,

the UE shall fulfill the requirements corresponding to low mobility scenario over measurement period (T_{relaxed}) and thereafter switch to requirements corresponding to stationary scenario, or stationary and not-at-cell-edge scenario. The measurement period, T_{relaxed} , is any of:

- $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$, defined in section 4.2B.2.9 for intra-frequency measurements on NR cells,

- $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ defined in section 4.2B.2.10 for inter-frequency measurements on NR cells and
- $T_{\text{measure,EUTRAN_RedCap_Relax}}$ and $T_{\text{evaluate,EUTRAN_RedCap_Relax}}$ defined in sections 4.2B.2.11 for inter-RAT E-UTRAN measurements.

When switching from:

stationary scenario to low mobility scenario, or

stationary and not-at-cell-edge scenario to low mobility scenario,

the UE shall fulfill the requirements corresponding to low mobility scenario upon fulfilling the switching criteria.

When switching from normal mode to low mobility scenario, stationary scenario or stationary and not-at-cell edge scenario during cell-reselection period, the UE shall fulfill the requirements corresponding to normal mode over measurement period (T_{normal}) and thereafter switch to requirements corresponding to low mobility scenario, stationary scenario or stationary and not-at-cell edge scenario. The measurement period, T_{normal} , is any of:

- $T_{\text{measure,NR_Intra_RedCap}}$ and $T_{\text{evaluate,NR_Intra_RedCap}}$, defined in section 4.2B.2.3 for intra-frequency measurements on NR cells,
- $T_{\text{measure,NR_Inter_RedCap}}$ and $T_{\text{evaluate,NR_Inter_RedCap}}$ defined in section 4.2B.2.4 for inter-frequency measurements on NR cells and
- $T_{\text{measure,EUTRAN_RedCap}}$ and $T_{\text{evaluate,EUTRAN_RedCap}}$ defined in sections 4.2B.2.5 for inter-RAT E-UTRAN measurements.

When switching from:

low mobility scenario to normal mode, or

stationary scenario to normal mode, or

stationary and not-at-cell-edge scenario to normal mode

the UE shall fulfill the requirements corresponding to normal mode upon fulfilling the switching criteria.

No requirement is defined for multiple transitions of scenarios within one measurement period.

4.2B.2.9 Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion for RedCap

4.2B.2.9.1 Introduction

This clause contains the requirements for measurements on intra-frequency NR cells when $S_{\text{rxlev}} \leq S_{\text{IntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{IntraSearchQ}}$ and when the UE is configured any of the following relaxed measurement criteria:

- Relaxed measurement criterion for a stationary UE defined in clause 5.2.4.9.3 in [1],
- Relaxed measurement criteria for a stationary UE and not-at-cell edge defined in clause 5.2.4.9.4 in [1],
- Both low mobility criterion and stationary criterion as defined in clause 5.2.4.9.1 and 5.2.4.9.3 or 5.2.4.9.4 in [1] respectively.
- Relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in [1],
- Relaxed measurement criterion for UE not-at-cell edge defined in clause 5.2.4.9.2 in [1],
- Both low mobility criterion and not-at-cell edge criterion as defined in clauses 5.2.4.9.1 and 5.2.4.9.2 in [1] respectively.

4.2B.2.9.2 Measurements for UE fulfilling stationary criterion

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *stationaryMobilityEvaluation* [2] criterion and UE is not configured with *cellEdgeEvaluationWhileStationary* [2] criterion and UE has fulfilled the *stationaryMobilityEvaluation* [2] criterion, or
- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] is not configured, and UE has fulfilled only the *stationaryMobilityEvaluation* [2] criterion

The requirements defined in clause 4.2B.2.3 apply for this clause except that:

- For a UE not configured with eDRX_IDLE, $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ are as specified in Table 4.2B.2.9.2-1 and Table 4.2B.2.9.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- For a UE configured with eDRX_IDLE up-to 10.24s, $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ are as specified in Table 4.2B.2.9.2-3 and Table 4.2B.2.9.2-4 for 1 Rx RedCap and 2 Rx RedCap respectively..
- For a UE configured with eDRX_IDLE greater than 10.24s, $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ are as specified in Table 4.2B.2.9.2-5 and Table 4.2B.2.9.2-6 for 1 Rx RedCap and 2 Rx RedCap respectively, provided eDRX_IDLE cycle is $\leq [163.84]$ sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

Table 4.2B.2.9.2-1: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for UEs fulfilling stationary criterion for 1 Rx RedCap UE

DRX cycle length [s]	$T_{\text{detect,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)	$T_{\text{measure,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)	$T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)
0.32	$11.52 \times M2 \times K3$ (36 x M2 x K3)	$1.28 \times M2 \times K3$ (4 x M2 x K3)	$5.12 \times M2 \times K3$ (16 x M2 x K3)
0.64	$17.92 \times K3$ (28 x K3)	$1.28 \times K3$ (2 x K3)	$5.12 \times K3$ (8 x K3)
1.28	$32 \times K3$ (25 x K3)	$1.28 \times K3$ (1 x K3)	$6.4 \times K3$ (5 x K3)
2.56	$58.88 \times K3$ (23 x K3)	$2.56 \times K3$ (1 x K3)	$7.68 \times K3$ (3 x K3)
Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{\text{detect, NR_Intra_RedCap_Relax}}$ is expected. Note 2: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the <i>stationaryMobilityEvaluation</i> [2] criterion.			

Table 4.2B.2.9.2-2: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for UEs fulfilling stationary criterion for 2 Rx RedCap UE

DRX cycle length [s]	Scaling Factor (N1)		$T_{\text{detect,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)	$T_{\text{measure,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)	$T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)
	FR1	FR2 ^{Note1}			
0.32	1	8	$11.52 \times N1 \times M2 \times K3$ (36 x N1 x M2 x K3)	$1.28 \times N1 \times M2 \times K3$ (4 x N1 x M2 x K3)	$5.12 \times N1 \times M2 \times K3$ (16 x N1 x M2 x K3)
0.64		5	$17.92 \times N1 \times K3$ (28 x N1 x K3)	$1.28 \times N1 \times K3$ (2 x N1 x K3)	$5.12 \times N1 \times K3$ (8 x N1 x K3)
1.28		4	$32 \times N1 \times K3$ (25 x N1 x K3)	$1.28 \times N1 \times K3$ (1 x N1 x K3)	$6.4 \times N1 \times K3$ (5 x N1 x K3)
2.56		3	$58.88 \times N1 \times K3$ (23 x N1 x K3)	$2.56 \times N1 \times K3$ (1 x N1 x K3)	$7.68 \times N1 \times K3$ (3 x N1 x K3)

Note 1:	Applies for RedCap UE of all supporting FR2 power classes.
Note 2:	M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{\text{detect, NR_Intra_RedCap_Relax}}$ is expected.
Note 3:	K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the <i>stationaryMobilityEvaluation</i> [2] criterion.

Table 4.2B.2.9.2-3: $T_{\text{detect, NR_Intra_RedCap_Relax}}$, $T_{\text{measure, NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate, NR_Intra_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle upto 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	$T_{\text{detect, NR_Intra_RedCap_Relax}}$ [s] (number of eDRX IDLE cycles)	$T_{\text{measure, NR_Intra_RedCap_Relax}}$ [s] (number of eDRX IDLE cycles)	$T_{\text{evaluate, NR_Intra_RedCap_Relax}}$ [s] (number of eDRX IDLE cycles)
2.56	$58.88 \times K3$ (23 x K3)	$2.56 \times K3$ (1 x K3)	$7.68 \times K3$ (3 x K3)
5.12	$117.76 \times K3$ (23 x K3)	$5.12 \times K3$ (1 x K3)	$10.24 \times K3$ (2 x K3)
10.24	$235.52 \times K3$ (23 x K3)	$10.24 \times K3$ (1 x K3)	$20.48 \times K3$ (2 x K3)
Note 1: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the <i>stationaryMobilityEvaluation</i> [2] criterion.			

Table 4.2B.2.9.2-4: $T_{\text{detect, NR_Intra_RedCap_Relax}}$, $T_{\text{measure, NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate, NR_Intra_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle upto 10.24s (Frequency range FR2)

eDRX_IDLE cycle length [s]	$T_{\text{detect, NR_Intra_RedCap_Relax}}$ [s] (number of eDRX IDLE cycles)	$T_{\text{measure, NR_Intra_RedCap_Relax}}$ [s] (number of eDRX IDLE cycles)	$T_{\text{evaluate, NR_Intra_RedCap_Relax}}$ [s] (number of eDRX IDLE cycles)
2.56	$58.88 \times N1 \times K3$ (23 x N1 x K3)	$2.56 \times N1 \times K3$ (1 x N1 x K3)	$7.68 \times N1 \times K3$ (3 x N1 x K3)
5.12	$117.76 \times N1 \times K3$ (23 x N1 x K3)	$5.12 \times N1 \times K3$ (1 x N1 x K3)	$10.24 \times N1 \times K3$ (2 x N1 x K3)
10.24	$235.52 \times N1 \times K3$ (23 x N1 x K3)	$10.24 \times N1 \times K3$ (1 x N1 x K3)	$20.48 \times N1 \times K3$ (2 x N1 x K3)
Note 1: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the <i>stationaryMobilityEvaluation</i> [2] criterion.			

Table 4.2B.2.9.2-5: $T_{\text{detect, NR_Intra_RedCap_Relax}}$, $T_{\text{measure, NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate, NR_Intra_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{\text{detect, NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles or eDRX cycles ^{Note 3})	$T_{\text{measure, NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles or eDRX cycles ^{Note 3})	$T_{\text{evaluate, NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles or eDRX cycles ^{Note 3})
$20.48 \leq \text{eDRX_IDLE cycle length} \leq [163.84]$	0.32	≥ 6.4 ([5])	$\left\lceil \frac{\text{eDRX_cycle_length}}{23} \right\rceil \times K3$ (23 x K3)	$0.32 \times M2 \times K3$ (1 x M2 x K3)	$0.64 \times M2 \times K3$ (2 x M2 x K3)
	0.64	≥ 12.8 ([10])		$0.64 \times K3$ (1 x K3)	$1.28 \times K3$ (2 x K3)

	1.28	≥ 15.36 ([12])		1.28 x K3 (1 x K3)	2.56 x K3 (2 x K3)
	2.56	≥ 30.72 ([24])		2.56 x K3 (1 x K3)	5.12 x K3 (2 x K3)
Note 1: The number of DRX cycles in this table corresponds to for the DRX cycles within PTWs. Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39]. Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,NR_Intra_RedCap_Relax}} \times \text{DRX_cycle}}{1.28} \right\rceil \times 1.28$. Note 4: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{\text{detect,NR_Intra_RedCap_Relax}}$ is expected. Note 5: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion.					

Table 4.2B.2.9.2-6: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	T _{detect,NR_Intra_RedCap_Relax} [s] (number of DRX cycles or eDRX cycles Note 3)	T _{measure,NR_Intra_RedCap_Relax} [s] (number of DRX cycles or eDRX cycles Note 3)	T _{evaluate,NR_Intra_RedCap_Relax} [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥30.72 (24)	8	$K3 \times eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW / DRX_cycle_length} \right\rceil$ (23 x N1 x K3)	0.32 x N1 x K3 (1 x N1 x K3)	0.64 x N1 x K3 (2 x N1 x K3)
	0.64	≥38.4 (30)	5		0.64 x N1 x K3 (1 x N1 x K3)	1.28 x N1 x K3 (2 x N1 x K3)
	1.28	40.96 (32)	4		1.28 x N1 x K3 (1 x N1 x K3)	2.56 x N1 x K3 (2 x N1 x K3)
	2.56	40.96 (32)	3		20.48 (8)	40.96 (16)
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: The number of DRX cycles in this table corresponds to for the DRX cycles within PTWs. Note 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39]. Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,NR_Intra_RedCap_Relax}} \times \text{DRX_cycle}}{1.28} \right\rceil \times 1.28$. Note 5: The measurement shall not be performed across PTW's. In this case the measurement is performed in the next available PTW. Note 6: The evaluation shall not be performed across PTW's. In this case the evaluation is performed in the next available PTW. Note 7: For DRX cycle length is 0.32s, 0.64s, and 2.56s, K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion. For DRX cycle length is 1.28s, K3 = 4 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion.						

4.2B.2.9.3 Measurements for a UE fulfilling not-at-cell edge while stationary criterion

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and
- both criteria are fulfilled, and,
- less than 4 hours have passed since measurements for cell reselection were performed

The requirements defined in this clause apply regardless of eDRX_IDLE configurations.

In this case the UE is not required to meet $T_{\text{detect,NR_Intra_RedCap}}$, $T_{\text{measure,NR_Intra_RedCap}}$ and $T_{\text{evaluate,NR_Intra_RedCap}}$ as defined in clause 4.2B.2.3.

4.2B.2.9.3A Measurements for a UE fulfilling stationary and not-at-cell-edge criteria

- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has also fulfilled both criteria, or
- UE is configured with *cellEdgeEvaluation* [2] criterion, *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] is not configured, and UE has fulfilled *cellEdgeEvaluation* and *stationaryMobilityEvaluation* [2] criteria

The requirements defined in clause 4.2B.2.3 apply for this clause except that:

- For a UE not configured with eDRX_IDLE, $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ are as specified in Table 4.2B.2.9.2-1 and Table 4.2B.2.9.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- For a UE configured with eDRX_IDLE up-to 10.24s, $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ are as specified in Table 4.2B.2.9.2-3 and Table 4.2B.2.9.2-4 for 1 Rx RedCap and 2 Rx RedCap respectively.
- For a UE configured with eDRX_IDLE greater than 10.24s, $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ are as specified in Table 4.2B.2.9.2-5 and Table 4.2B.2.9.2-6 for 1 Rx RedCap and 2 Rx RedCap respectively, provided eDRX_IDLE cycle is $\leq [163.84]$ sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

4.2B.2.9.4 Measurements for a UE fulfilling low mobility and stationary criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and *stationaryMobilityEvaluation* [2] criterion, and has also fulfilled both criteria, or
- UE is configured with *lowMobilityEvaluation* [2] criterion, *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] is not configured, and UE has fulfilled *lowMobilityEvaluation* and *stationaryMobilityEvaluation* [2] criteria

The requirements defined in clause 4.2B.2.9.2 apply for this clause.

4.2B.2.9.5 Measurements for a UE fulfilling low mobility and not-at-cell-edge while stationary criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled this criterion, and
- UE is configured with *stationaryMobilityEvaluation* [2] and *cellEdgeEvaluationWhileStationary* [2] criterion, and UE has fulfilled both criteria

The requirements defined in clause 4.2B.2.9.3 apply for this clause.

4.2B.2.9.6 Measurements for a UE fulfilling not-at-cell edge and not-at-cell edge while stationary criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *cellEdgeEvaluation* [2] criterion and UE has fulfilled that criterion, and
- UE is configured with *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and has fulfilled both criteria

The requirements defined in clause 4.2B.2.9.3 apply for this clause.

4.2B.2.9.7 Measurements for a UE fulfilling low mobility and not-at-cell edge criteria and not-at-cell-edge while stationary criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has fulfilled both criteria, and
- UE is configured with *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and has fulfilled both criteria

The requirements defined in clause 4.2B.2.9.3 apply for this clause.

4.2B.2.9.8 Measurements for a UE fulfilling low mobility, not-at-cell edge and stationary criterion

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has fulfilled both criteria, and
- UE is configured with *stationaryMobilityEvaluation* [2] criterion and has also fulfilled that criterion, or UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] is not configured, and UE has fulfilled *stationaryMobilityEvaluation* [2] criteria

The requirements defined in clause 4.2.2.9.4 apply for this clause.

4.2B.2.9.9 Measurements for UE fulfilling low mobility criterion

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and UE is not configured with *cellEdgeEvaluation* [2] criterion and UE has fulfilled the *lowMobilityEvaluation* [2] criterion, or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] is not configured, and UE has fulfilled only the *lowMobilityEvaluation* [2] criterion.

The requirements defined in clause 4.2B.2.3 apply for this clause except that:

- For a UE not configured with eDRX_IDLE, $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ are as specified in Table 4.2B.2.9.9-1 and Table 4.2B.2.9.9-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- For a UE configured with eDRX_IDLE up-to 10.24s, $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ are as specified in Table 4.2B.2.9.9-3 and Table 4.2B.2.9.9-4 for 1 Rx RedCap and 2 Rx RedCap respectively.
- For a UE configured with eDRX_IDLE greater than 10.24s, $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ are as specified in Table 4.2B.2.9.9-5 and Table 4.2B.2.9.9-6 for 1 Rx RedCap and 2 Rx RedCap respectively.

RedCap respectively, provided eDRX_IDLE cycle is $\leq [163.84]$ sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

Table 4.2B.2.9.9-1: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for UEs fulfilling low mobility criterion for 1 Rx RedCap UE

DRX cycle length [s]	$T_{\text{detect,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)	$T_{\text{measure,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)	$T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)
0.32	$11.52 \times M2 \times K1$ ($36 \times M2 \times K1$)	$1.28 \times M2 \times K1$ ($4 \times M2 \times K1$)	$5.12 \times M2 \times K1$ ($16 \times M2 \times K1$)
0.64	$17.92 \times K1$ ($28 \times K1$)	$1.28 \times K1$ ($2 \times K1$)	$5.12 \times K1$ ($8 \times K1$)
1.28	$32 \times K1$ ($25 \times K1$)	$1.28 \times K1$ ($1 \times K1$)	$6.4 \times K1$ ($5 \times K1$)
2.56	$58.88 \times K1$ ($23 \times K1$)	$2.56 \times K1$ ($1 \times K1$)	$7.68 \times K1$ ($3 \times K1$)
Note 1: $M2 = 1.5$ if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise $M2=1$.			
Note 2: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.			

Table 4.2B.2.9.9-2: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for UEs fulfilling low mobility criterion for 2 Rx RedCap UE

DRX cycle length [s]	Scaling Factor (N1)		T _{detect,NR_Intra_RedCap_Relax} [s] (number of DRX cycles)	T _{measure,NR_Intra_RedCap_Relax} [s] (number of DRX cycles)	T _{evaluate,NR_Intra_RedCap_Relax} [s] (number of DRX cycles)
	FR1	FR2 ^{Note1}			
0.32	1	8	11.52 x N1 x M2 x K1 (36 x N1 x M2 x K1)	1.28 x N1 x M2 x K1 (4 x N1 x M2 x K1)	5.12 x N1 x M2 x K1 (16 x N1 x M2 x K1)
0.64		5	17.92 x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)
1.28		4	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
Note 1:	Applies for RedCap UE of all supporting FR2 power classes.				
Note 2:	M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.				
Note 3:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.				

Table 4.2B.2.9.9-3: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle upto 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	$T_{\text{detect,NR_Intra_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure,NR_Intra_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times K1$ ($23 \times K1$)	$2.56 \times K1$ ($1 \times K1$)	$7.68 \times K1$ ($3 \times K1$)
5.12	$117.76 \times K1$ ($23 \times K1$)	$5.12 \times K1$ ($1 \times K1$)	$10.24 \times K1$ ($2 \times K1$)
10.24	$235.52 \times K1$ ($23 \times K1$)	$10.24 \times K1$ ($1 \times K1$)	$20.48 \times K1$ ($2 \times K1$)
Note 1: Void			
Note 2: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.			

Table 4.2B.2.9.9-4: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle upto 10.24s (Frequency range FR2)

eDRX_IDLE cycle length [s]	$T_{\text{detect,NR_Intra_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure,NR_Intra_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)
----------------------------	--	---	--

2.56	$58.88 \times N1 \times K1$ (23 x N1 x K1)	$2.56 \times N1 \times K1$ (1 x N1 x K1)	$7.68 \times N1 \times K1$ (3 x N1 x K1)
5.12	$117.76 \times N1 \times K1$ (23 x N1 x K1)	$5.12 \times N1 \times K1$ (1 x N1 x K1)	$10.24 \times N1 \times K1$ (2 x N1 x K1)
10.24	$235.52 \times N1 \times K1$ (23 x N1 x K1)	$10.24 \times N1 \times K1$ (1 x N1 x K1)	$20.48 \times N1 \times K1$ (2 x N1 x K1)
Note 1: Void. Note 2: N1 = 3 for RedCap UE of all supporting FR2 power classes. Note 3: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.			

Table 4.2B.2.9.9-5: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods) Note 3	T _{detect,NR_Intra_RedCap_Relax} [s] (number of DRX cycles)	T _{measure,NR_Intra_RedCap_Relax} [s] (number of DRX cycles)	T _{evaluate,NR_Intra_RedCap_Relax} [s] (number of DRX cycles)
20.48 ≤ eDRX_IDLE cycle length ≤ [163.84]	0.32	≥3.84 ([3])	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil \times K$ (23 x K1)	0.32 x M2 x K1 (1 x M2 x K1)	0.64 x M2 x K1 (2 x M2 x K1)
	0.64	≥3.84 (3)		0.64 x K1 (1 x K1)	1.28 x K1 (2 x K1)
	1.28	≥7.68 (6)		1.28 x K1 (1 x K1)	2.56 x K1 (2 x K1)
	2.56	≥15.36 (12)		2.56 x K1 (1 x K1)	5.12 x K1 (2 x K1)
Note 1: The number of DRX cycles in this table is given for the DRX cycles within PTWs. Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39]. Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,NR_Intra_RedCap_Relax}} + DRX_cycle}{1.28} \right\rceil * 1.28$. Note 4: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 5: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.					

Table 4.2B.2.9.9-6: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR2)

eDRX_IDLE cycle length [s] Note 3	DRX cycle length [s]	PTW length [s] (number of 1.28s periods) Note 4	Scaling Factor (N1) Note 1	$T_{\text{detect,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles or eDRX cycles) Note 2	$T_{\text{measure,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles) Note 2	$T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles) Note 2
$20.48 \leq \text{eDRX_IDLE cycle length} \leq [163.84]$	0.32	≥ 15.36 (12)	8	$K1 \times eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1 x K1)	$0.32 \times N1 \times K1$ (1 x N1 x K1)	$0.64 \times N1 \times K1$ (2 x N1 x K1)
	0.64	≥ 19.2 (15)	5		$0.64 \times N1 \times K1$ (1 x N1 x K1)	$1.28 \times N1 \times K1$ (2 x N1 x K1)
	1.28	≥ 30.72 (24)	4		$1.28 \times N1 \times K1$ (1 x N1 x K1)	$2.56 \times N1 \times K1$ (2 x N1 x K1)

	2.56	40.96 (32)	3		20.48 (8)	40.96 (16)
Note 1:	Applies for RedCap UE of all supporting FR2 power classes.					
Note 2:	The number of DRX cycles in this table is given for the DRX cycles within PTWs.					
Note 3:	The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].					
Note 4:	The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,NR_Intra_RedCap_Relax}} \times \text{DRX_cycle}}{1.28} \right\rceil \times 1.28$.					
Note 5:	The measurement shall not be performed across PTW's. In this case the measurement is performed in the next available PTW.					
Note 6:	The evaluation shall not be performed across PTW's.					
Note 7:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation criterion</i> [2].					

4.2B.2.9.10 Measurements for UE fulfilling not-at-cell edge criterion

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *cellEdgeEvaluation* [2] criterion and UE is not configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled the *cellEdgeEvaluation* [2] criterion, or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criteria and *combineRelaxedMeasCondition* [2] is not configured, and UE has fulfilled only the *cellEdgeEvaluation* [2] criterion.

The requirements defined in clause 4.2B.2.3 apply for this clause except that:

- For a UE not configured with eDRX_IDLE, $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ are as specified in Table 4.2B.2.9.10-1 and Table 4.2B.2.9.10-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- For a UE configured with eDRX_IDLE up-to 10.24s, $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ are as specified in Table 4.2B.2.9.10-3 and Table 4.2B.2.9.10-4 for 1 Rx RedCap and 2 Rx RedCap respectively.
- For a UE configured with eDRX_IDLE greater than 10.24s, $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ are as specified in Table 4.2B.2.9.10-5 and Table 4.2B.2.9.10-6 for 1 Rx RedCap and 2 Rx RedCap respectively, provided eDRX_IDLE cycle is $\leq [163.84]$ sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

Table 4.2B.2.9.10-1: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for UEs fulfilling not-at-cell edge criterion for 1 Rx RedCap UE

DRX cycle length [s]	$T_{\text{detect,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)	$T_{\text{measure,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)	$T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)
0.32	$11.52 \times M2 \times K1$ (36 x M2 x K1)	$1.28 \times M2 \times K1$ (4 x M2 x K1)	$5.12 \times M2 \times K1$ (16 x M2 x K1)
0.64	$17.92 \times K1$ (28 x K1)	$1.28 \times K1$ (2 x K1)	$5.12 \times K1$ (8 x K1)
1.28	$32 \times K1$ (25 x K1)	$1.28 \times K1$ (1 x K1)	$6.4 \times K1$ (5 x K1)
2.56	$58.88 \times K1$ (23 x K1)	$2.56 \times K1$ (1 x K1)	$7.68 \times K1$ (3 x K1)
Note 1: M2 = 1.5 if SMTTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.			
Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.			

Table 4.2B.2.9.10-2: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for UEs fulfilling not-at-cell edge criterion for 2 Rx RedCap UE

DRX cycle length [s]	Scaling Factor (N1)		$T_{\text{detect,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)	$T_{\text{measure,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)	$T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)
	FR1	FR2 ^{Note1}			

0.32	1	8	11.52 x N1 x M2 x K1 (36 x N1 x M2 x K1)	1.28 x N1 x M2 x K1 (4 x N1 x M2 x K1)	5.12 x N1 x M2 x K1 (16 x N1 x M2 x K1)
0.64		5	17.92 x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)
1.28		4	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
Note 1: Applies for RedCap UE of all supporting FR2 power classes.					
Note 2: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.					
Note 3: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.					

Table 4.2B.2.9.10-3: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle upto 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	$T_{\text{detect,NR_Intra_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure,NR_Intra_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times K1$ (23 x K1)	$2.56 \times K1$ (1 x K1)	$7.68 \times K1$ (3 x K1)
5.12	$117.76 \times K1$ (23 x K1)	$5.12 \times K1$ (1 x K1)	$10.24 \times K1$ (2 x K1)
10.24	$235.52 \times K1$ (23 x K1)	$10.24 \times K1$ (1 x K1)	$20.48 \times K1$ (2 x K1)
Note 1: Void.			
Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.			

Table 4.2B.2.9.10-4: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle upto 10.24s (Frequency range FR2)

eDRX_IDLE cycle length [s]	$T_{\text{detect,NR_Intra_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure,NR_Intra_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times N1 \times K1$ (23 x N1 x K1)	$2.56 \times N1 \times K1$ (1 x K1)	$7.68 \times N1 \times K1$ (3 x N1 x K1)
5.12	$117.76 \times N1 \times K1$ (23 x N1 x K1)	$5.12 \times N1 \times K1$ (1 x N1 x K1)	$10.24 \times N1 \times K1$ (2 x N1 x K1)
10.24	$235.52 \times N1 \times K1$ (23 x N1 x K1)	$10.24 \times N1 \times K1$ (1 x N1 x K1)	$20.48 \times N1 \times K1$ (2 x N1 x K1)
Note 1: Void			
Note 2: N1 = 3 for RedCap UE of all supporting FR2 power classes..			
Note 3: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.			

Table 4.2B.2.9.10-5: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{\text{detect,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)	$T_{\text{measure,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)	$T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ [s] (number of DRX cycles)
$20.48 \leq \text{eDRX_IDLE cycle length} \leq [163.84]$	0.32	≥ 3.84 (3)	$\frac{\text{eDRX_cycle_length}}{23} \times \left\lceil \frac{\text{PTW}/\text{DRX_cycle_length}}{1} \right\rceil \times K1$ (23 x K1)	$0.32 \times M2 \times K1$ (1 x M2 x K1)	$0.64 \times M2 \times K1$ (2 x M2 x K1)
	0.64	≥ 3.84 (3)		$0.64 \times K1$ (1 x K1)	$1.28 \times K1$ (2 x K1)

	1.28	≥ 7.68 (6)		$1.28 \times K1$ (1 x K1)	$2.56 \times K1$ (2 x K1)
	2.56	$\geq [15.36]$ (12)		$2.56 \times K1$ (1 x K1)	$5.12 \times K1$ (2 x K1)
Note 1: The number of DRX cycles in this table corresponds to for the DRX cycles within PTWs. Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39]. Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,NR_Intra_RedCap_Relax}} \times \text{DRX_cycle}}{1.28} \right\rceil \times 1.28$. Note 4: M2 = 1.5 if SMTTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 5: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.					

Table 4.2B.2.9.10-6: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	T _{detect,NR_Intra_RedCap_Relax} [S] (number of DRX cycles)	T _{measure,NR_Intra_RedCap_Relax} [S] (number of DRX cycles)	T _{evaluate,NR_Intra_RedCap_Relax} [S] (number of DRX cycles)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥15.36 (12)	8	$K1 \times eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW / DRX_cycle_length} \right\rceil$ (23 × N1 × K1)	0.32 × N1 × K1 (1 × N1 × K1)	0.64 × N1 × K1 (2 × N1 × K1)
	0.64	≥19.2 (15)	5		0.64 × N1 × K1 (1 × N1 × K1)	1.28 × N1 × K1 (2 × N1 × K1)
	1.28	≥30.72 (24)	4		1.28 × N1 × K1 (1 × N1 × K1)	2.56 × N1 × K1 (2 × N1 × K1)
	2.56	40.96 (32)	3		20.48	40.96
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: The number of DRX cycles in this table corresponds to the DRX cycles within PTWs. Note 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39]. Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,NR_Intra_RedCap_Relax}} \times \text{DRX_cycle}}{1.28} \right\rceil \times 1.28$. Note 5: The measurement shall not be performed across PTW's. In this case the measurement is performed in the next available PTW. Note 6: The evaluation shall not be performed across PTW's. Note 7: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation criterion</i> [2].						

4.2B.2.9.11 Measurements for UE fulfilling low mobility and not-at-cell edge criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and
- both criteria are fulfilled, and
- less than 1 hour have passed since measurements for cell reselection were performed

In this case the UE is not required to meet $T_{\text{detect,NR_Intra_RedCap}}$, $T_{\text{measure,NR_Intra_RedCap}}$ and $T_{\text{evaluate,NR_Intra_RedCap}}$ as defined in Table 4.2B.2.3.

4.2B.2.10 Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion

4.2B.2.10.1 Introduction

This clause contains the requirements for measurements on inter-frequency NR cells when $S_{rxlev} \leq S_{nonIntraSearchP}$ or $S_{qual} \leq S_{nonIntraSearchQ}$ and when the UE is configured any of the following relaxed measurement criteria:

- Relaxed measurement criterion for a stationary UE defined in clause 5.2.4.9.3 in [1],
- Relaxed measurement criterion for a stationary UE not at cell edge defined in clause 5.2.4.9.4 in [1],
- Both low mobility criterion and stationary criterion as defined in clause 5.2.4.9.1 and 5.2.4.9.3 or 5.2.4.9.4 in [1] respectively.
- Relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in [1],
- Relaxed measurement criterion for UE not-at-cell edge defined in clause 5.2.4. 9.2 in [1],
- Both low mobility criterion and not-at-cell edge criterion as defined in clauses 5.2.4. 9.1 and 5.2.4.9.2 in [1] respectively.

4.2B.2.10.2 Measurements for UE fulfilling stationary criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with *stationaryMobilityEvaluation* [2] criterion and UE is not configured with *cellEdgeEvaluationWhileStationary* [2] criterion and UE has fulfilled the *stationaryMobilityEvaluation* [2] criterion, or
- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] is not configured, and UE has fulfilled only the *stationaryMobilityEvaluation* [2] criterion.

When $S_{rxlev} \leq S_{nonIntraSearchP}$ or $S_{qual} \leq S_{nonIntraSearchQ}$ then the requirements defined in clause 4.2B.2.4 apply for this clause except that:

- For a UE not configured with eDRX_IDLE, $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ are as specified in Table 4.2B.2.10.2-1 and Table 4.2B.2.10.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- For a UE configured with eDRX_IDLE up-to 10.24s, $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ are as specified in Table 4.2B.2.10.2-3 and Table 4.2B.2.10.2-4 for 1 Rx RedCap and 2 Rx RedCap respectively.
- For a UE configured with eDRX_IDLE greater than 10.24s, $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ are as specified in Table 4.2B.2.10.2-5 and Table 4.2B.2.10.2-6 for 1 Rx RedCap and 2 Rx RedCap respectively, provided eDRX_IDLE cycle is $\leq [163.84]$ sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

When $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$ then the UE shall search for inter-frequency layers of higher priority at least every $K2 \cdot T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7 and, $K2 = 240$.

Table 4.2B.2.10.2-1: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for 1 Rx RedCap UE

DRX cycle length [s]	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)
0.32	$11.52 \times 1.5 \times K3$ ($36 \times 1.5 \times K3$)	$1.28 \times 1.5 \times K3$ ($4 \times 1.5 \times K3$)	$5.12 \times 1.5 \times K3$ ($16 \times 1.5 \times K3$)
0.64	$17.92 \times K3$ ($28 \times K3$)	$1.28 \times K3$ ($2 \times K3$)	$5.12 \times K3$ ($8 \times K3$)
1.28	$32 \times K3$ ($25 \times K3$)	$1.28 \times K3$ ($1 \times K3$)	$6.4 \times K3$ ($5 \times K3$)

2.56	58.88 x K3 (23 x K3)	2.56 x K3 (1 x K3)	7.68 x K3 (3 x K3)
Note 1: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the <i>stationaryMobilityEvaluation</i> [2] criterion.			

Table 4.2B.2.10.2-2: $T_{\text{detect,NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ for 2 Rx RedCap UE

DRX cycle length [s]	Scaling Factor (N1)		T _{detect,NR_Inter_RedCap_Relax} [s] (number of DRX cycles)	T _{measure,NR_Inter_RedCap_Relax} [s] (number of DRX cycles)	T _{evaluate,NR_Inter_RedCap_Relax} [s] (number of DRX cycles)
	FR1	FR2 ^{Note1}			
0.32	1	8	11.52 × N1 × 1.5 × K3 (36 × N1 × 1.5 × K3)	1.28 × N1 × 1.5 × K3 (4 × N1 × 1.5 × K4)	5.12 × N1 × 1.5 × K3 (16 × N1 × 1.5 × K3)
0.64		5	17.92x N1 × K3 (28 × N1 × K3)	1.28 × N1 × K3 (2 × N1 × K3)	5.12 × N1 × K3 (8 × N1 × K3)
1.28		4	32 × N1 × K3 (25 × N1 × K3)	1.28 × N1 × K3 (1 × N1 × K3)	6.4 × N1 × K3 (5 × N1 × K3)
2.56		3	58.88 × N1 × K3 (23 × N1 × K3)	2.56 × N1 × K3 (1 × N1 × K3)	7.68 × N1 × K3 (3 × N1 × K3)
Note 1:	Applies for RedCap UE of all supporting power class.				
Note 2:	K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the <i>stationaryMobilityEvaluation</i> [2] criterion.				

Table 4.2B.2.10.2-3: $T_{\text{detect, NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate, NR_Inter_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle upto 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	$T_{\text{detect, NR_Inter_RedCap_Relax}}$ [s] (number of DRX cycles)	$T_{\text{measure, NR_Inter_RedCap_Relax}}$ [s] (number of DRX cycles)	$T_{\text{evaluate, NR_Inter_RedCap_Relax}}$ [s] (number of DRX cycles)
2.56	58.88 x K3 (23 x K3)	2.56 x K3 (1 x K3)	5.12 x K3 (2 x K3)
5.12	117.76 x K3 (23 x K3)	5.12 x K3 (1 x K3)	10.24 x K3 (2 x K3)
10.24	235.52 x K3 (23 x K3)	10.24 x K3 (1 x K3)	20.48 x K3 (2 x K3)
Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{\text{detect, NR_Inter_RedCap_Relax}}$ is expected.			
Note 2: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the <i>stationaryMobilityEvaluation</i> [2] criterion.			

Table 4.2B.2.10.2-4: $T_{\text{detect,NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle upto 10.24s (Frequency range FR2) f

eDRX_IDLE cycle length [s]	$T_{\text{detect,NR_Inter_RedCap_Relax}}$ [s] (number of eDRX cycles)	$T_{\text{measure,NR_Inter_RedCap_Relax}}$ [s] (number of eDRX cycles)	$T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ [s] (number of eDRX cycles)
2.56	58.88 x N1 x K3 (23 x N1 x K3)	2.56 x N1 x K3 (1 x N1 x K3)	7.68 x N1 x K3 (3 x N1 x K3)
5.12	117.76 x N1 x K3 (23 x N1 x K3)	5.12 x N1 x K3 (1 x N1 x K3)	10.24 x N1 x K3 (2 x N1 x K3)
10.24	235.52 x N1 x K3 (23 x N1 x K3)	10.24 x N1 x K3 (1 x N1 x K3)	20.48 x N1 x K3 (2 x N1 x K3)
Note 1: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the <i>stationaryMobilityEvaluation</i> [2] criterion.			

Table 4.2B.2.10.2-5: $T_{\text{detect,NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Tdetect,NR_Inter_RedCap_Relax [s] (number of DRX cycles)	Tmeasure,NR_Inter_RedCap_Relax [s] (number of DRX cycles)	Tevaluate,NR_Inter_RedCap_Relax [s] (number of DRX cycles)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥64] (5)	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil \times K$ (23 x K3)	0.32 x M2 x K3 (1 x M2 x K3)	0.64 x M2 x K3 (2 x M2 x K3)
	0.64	≥12.8 (10)		0.64 x K3 (1 x K3)	1.28 x K3 (2 x K3)
	1.28	≥15.36 (12)		1.28 x K3 (1 x K3)	2.56 x K3 (2 x K3)
	2.56	≥30.72 (4)		2.56 x K3 (1 x K3)	5.12 x K3 (2 x K3)
Note 1:	The number of DRX cycles in this table corresponds to for the DRX cycles within PTWs.				
Note 2:	The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].				
Note 3:	The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Inter_RedCap_Relax} \times DRX_cycle}{1.28} \right\rceil \times 1.28$.				
Note 4:	K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion.				

Table 4.2B.2.10.2-6: $T_{\text{detect,NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle (Frequency range FR2) for eDRX_IDLE cycle larger than 10.24 s

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	T _{detect,NR_Inter_RedCap_Relax} [s] (number of DRX cycles or eDRX cycles Note 3)	T _{measure,NR_Inter_RedCap_Relax} [s] (number of DRX cycles or eDRX cycles Note 3)	T _{evaluate,NR_Inter_RedCap_Relax} [s] (number of DRX cycles or eDRX cycles Note 3)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥30.72 (24)	8	$K3 \times eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 x N1 x K3)	0.32 x N1 x K3 (1 x N1 x K3)	0.64 x N1 x K3 (2 x N1 x K3)
	0.64	≥38.4 (30)	5		0.64 x N1 x K3 (1 x N1 x K3)	1.28 x N1 x K3 (2 x N1 x K3)
	1.28	40.96 (32)	4		1.28 x N1 x K3 (1 x N1 x K3)	2.56 x N1 x K3 (2 x N1 x K3)
	2.56	40.96 (32)	3		20.48 (8)	40.96 (16)
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: The number of DRX cycles in this table is given for the DRX cycles within PTWs. Note 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39]. Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,NR_Inter_RedCap_Relax}} \times DRX_cycle}{1.28} \right\rceil \times 1.28$. Note 5: For DRX cycle length is 0.32s, 0.64s and 2.56s, K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion. For DRX cycle length is 1.28s, K3 = 4 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion.						

4.2B.2.10.3 Measurements for a UE fulfilling not-at-cell edge while stationary criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and
- both criteria are fulfilled, and
- less than 4 hours have passed since measurements for cell reselection were performed.

In this case the UE is not required to meet $T_{\text{detect,NR_Inter_RedCap}}$, $T_{\text{measure,NR_Inter_RedCap}}$ and $T_{\text{evaluate,NR_Inter_RedCap}}$ as defined in clause 4.2B.2.4.

When $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$, the UE shall search for, measure and evaluate inter-frequency layers of higher, equal or lower priority at least every 4 hours.

When $S_{\text{rxlev}} > S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} > S_{\text{nonIntraSearchQ}}$, the UE shall search for inter-frequency layers of higher priority at least every $K2 \cdot T_{\text{higher_priority_search}}$ where $T_{\text{higher_priority_search}}$ is described in clause 4.2.2.7 and $K2=240$.

The requirements defined in this clause apply regardless of eDRX_IDLE configurations.

4.2B.2.10.3A Measurements for a UE fulfilling stationary and not-at-cell-edge-criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, has also fulfilled both criteria, or
- UE is configured with *cellEdgeEvaluation* [2] criterion and with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] is not configured, and UE has fulfilled *cellEdgeEvaluation* and *stationaryMobilityEvaluation* [2] criteria

When $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$ then the requirements defined in clause 4.2B.2.4 apply for this clause except that:

- $T_{\text{detect,NR_Inter_RedCap_Relax}}$ as specified in Table 4.2B.2.10.2-1 and Table 4.2B.2.10.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{\text{measure,NR_Inter_RedCap_Relax}}$ as specified in Table 4.2B.2.10.2-1 and Table 4.2B.2.10.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ as specified in Table 4.2B.2.10.2-1 and Table 4.2B.2.10.2-2 for 1 Rx RedCap and 2 Rx RedCap respectively.

If the UE is configured with eDRX_IDLE cycle then the requirements in Table 4.2B.2.10.2-3 and Table 4.2B.2.10.2-4 are applicable for eDRX cycle up to 10.24 s in FR1 and FR2 respectively.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, then the requirements in Table 4.2B.2.10.2-5 and Table 4.2B.2.10.2-6 respectively apply provided that eDRX cycle is $\leq [163.84]$ sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

When $S_{\text{rxlev}} > S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} > S_{\text{nonIntraSearchQ}}$ then the UE shall search for inter-frequency layers of higher priority at least every $K2 \cdot T_{\text{higher_priority_search}}$ where $T_{\text{higher_priority_search}}$ is described in clause 4.2.2.7 and, $K2 = 240$.

4.2B.2.10.4 Measurements for a UE fulfilling low mobility and stationary criteria

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and *stationaryMobilityEvaluation* [2] criterion, and has also fulfilled both criteria, or,
- UE is configured with *lowMobilityEvaluation* [2] criterion and with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] not configured, and UE has fulfilled *lowMobilityEvaluation* and *stationaryMobilityEvaluation* [2] criteria

The requirements defined in clause 4.2B.2.10.2 apply for this clause.

4.2B.2.10.5 Measurements for a UE fulfilling low mobility and not-at-cell-edge while stationary criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled this criterion, and
- UE is configured with *stationaryMobilityEvaluation* [2] and *cellEdgeEvaluationWhileStationary* [2] criterion, and UE has fulfilled both criteria

The requirements defined in clause 4.2B.2.10.3 apply for this clause.

4.2B.2.10.6 Measurements for a UE fulfilling not-at-cell edge and not-at-cell edge while stationary criteria

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with *cellEdgeEvaluation* [2] criterion and UE has fulfilled that criterion, and
- UE is configured with *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and has fulfilled both criteria

The requirements defined in clause 4.2B.2.10.3 apply for this clause.

4.2B.2.10.7 Measurements for a UE fulfilling low mobility and not-at-cell edge criteria and not-at-cell-edge while stationary criteria

This clause contains requirements for measurements on intra-frequency NR cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has fulfilled both criteria, and
- UE is configured with *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and has fulfilled both criteria

The requirements defined in clause 4.2B.2.10.3 apply for this clause.

4.2B.2.10.8 Measurements for a UE fulfilling low mobility, not-at-cell edge and stationary criteria

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has fulfilled both criteria, and
- UE is configured with *stationaryMobilityEvaluation* [2] criterion and has also fulfilled that criterion, or UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] is not configured, and UE has fulfilled *stationaryMobilityEvaluation* [2] criterion.

In this case the UE is not required to meet $T_{\text{detect,NR_Inter_RedCap}}$, $T_{\text{measure,NR_Inter_RedCap}}$ and $T_{\text{evaluate,NR_Inter_RedCap}}$ as defined in clause 4.2B.2.4.

When $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$, the requirements of $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$ defined in clause 4.2.2.10.4 apply for this clause.

When $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$, the UE the requirements of $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$ defined in clause 4.2B.2.10.2 apply for this clause.

4.2B.2.10.9 Measurements for UE fulfilling low mobility criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and UE is not configured with *cellEdgeEvaluation* [2] criterion and UE has fulfilled the *lowMobilityEvaluation* [2] criterion, or
- UE is configured with both *lowMobilityEvaluation* [2] and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] is not configured, and UE has fulfilled only the *lowMobilityEvaluation* [2] criterion.

When $S_{rxlev} \leq S_{nonIntraSearchP}$ or $S_{qual} \leq S_{nonIntraSearchQ}$ then the requirements are defined as follows:

- For a UE not configured with eDRX_IDLE, $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ are as specified in Table 4.2B.2.10.9-1 and Table 4.2B.2.10.9-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- For a UE configured with eDRX_IDLE up-to 10.24s, $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ are as specified in Table 4.2B.2.10.9-3 and Table 4.2B.2.10.9-4 for 1 Rx RedCap and 2 Rx RedCap respectively.
- For a UE configured with eDRX_IDLE greater than 10.24s, $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ are as specified in Table 4.2B.2.10.9-5 and Table 4.2B.2.10.9-6 for 1 Rx RedCap and 2 Rx RedCap respectively, provided eDRX_IDLE cycle is $\leq [163.84]$ sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

When $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$ and the UE is configured with *highPriorityMeasRelax* [2] then the UE shall search for inter-frequency layers of higher priority at least every $K2 \cdot T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2B.2.7 and, $K2 = 60$. Otherwise, if the UE is not configured with *highPriorityMeasRelax* [2] then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2B.2.7.

Table 4.2B.2.10.9-1: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UEs fulfilling low mobility criterion for 1 Rx RedCap UE

DRX cycle length [s]	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)
0.32	$11.52 \times M2 \times K1$ (36 $\times M2 \times K1$)	$1.28 \times M2 \times K1$ (4 $\times M2 \times K1$)	$5.12 \times M2 \times K1$ (16 $\times M2 \times K1$)
0.64	$17.92 \times K1$ (28 $\times K1$)	$1.28 \times K1$ (2 $\times K1$)	$5.12 \times K1$ (8 $\times K1$)
1.28	$32 \times K1$ (25 $\times K1$)	$1.28 \times K1$ (1 $\times K1$)	$6.4 \times K1$ (5 $\times K1$)
2.56	$58.88 \times K1$ (23 $\times K1$)	$2.56 \times K1$ (1 $\times K1$)	$7.68 \times K1$ (3 $\times K1$)
Note 1: $M2 = 1.5$ if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise $M2=1$.			
Note 2: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.			

Table 4.2B.2.10.9-2: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UEs fulfilling low mobility criterion for 2 Rx RedCap UE

DRX cycle length [s]	Scaling Factor (N1)		$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)
	FR1	FR2 ^{Note1}			
0.32	1	8	$11.52 \times N1 \times M2 \times K1$ (36 $\times N1 \times M2 \times K1$)	$1.28 \times N1 \times M2 \times K1$ (4 $\times N1 \times M2 \times K1$)	$5.12 \times N1 \times M2 \times K1$ (16 $\times N1 \times M2 \times K1$)
0.64		5	$17.92 \times N1 \times K1$ (28 $\times N1 \times K1$)	$1.28 \times N1 \times K1$ (2 $\times N1 \times K1$)	$5.12 \times N1 \times K1$ (8 $\times N1 \times K1$)
1.28		4	$32 \times N1 \times K1$ (25 $\times N1 \times K1$)	$1.28 \times N1 \times K1$ (1 $\times N1 \times K1$)	$6.4 \times N1 \times K1$ (5 $\times N1 \times K1$)

2.56	3	$58.88 \times N1 \times K1$ (23 x N1 x K1)	$2.56 \times N1 \times K1$ (1 x N1 x K1)	$7.68 \times N1 \times K1$ (3 x N1 x K1)
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: $M2 = 1.5$ if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise $M2=1$. Note 3: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.				

Table 4.2B.2.10.9-3: $T_{\text{detect,NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle upto 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	$T_{\text{detect,NR_Inter_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure,NR_Inter_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times K1$ (23 x K1)	$2.56 \times K1$ (1 x K1)	$7.68 \times K1$ (3 x K1)
5.12	$117.76 \times K1$ (23 x K1)	$5.12 \times K1$ (1 x K1)	$10.24 \times K1$ (2 x K1)
10.24	$235.52 \times K1$ (23 x K1)	$10.24 \times K1$ (1 x K1)	$20.48 \times K1$ (2 x K1)
Note 1: Void Note 2: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.			

Table 4.2B.2.10.9-4: $T_{\text{detect,NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle upto 10.24s (Frequency range FR2)

eDRX_IDLE cycle length [s]	$T_{\text{detect,NR_Inter_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure,NR_Inter_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times N1 \times K1$ (23 x N1 x K1)	$2.56 \times N1 \times K1$ (1 x N1 x K1)	$7.68 \times N1 \times K1$ (3 x N1 x K1)
5.12	$117.76 \times N1 \times K1$ (23 x N1 x K1)	$5.12 \times N1 \times K1$ (1 x N1 x K1)	$10.24 \times N1 \times K1$ (2 x N1 x K1)
10.24	$235.52 \times N1 \times K1$ (23 x N1 x K1)	$10.24 \times N1 \times K1$ (1 x N1 x K1)	$20.48 \times N1 \times K1$ (2 x N1 x K1)
Note 1: Void. Note 2: $N1 = 3$ for RedCap UE of all supporting FR2 power classes. Note 3: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.			

Table 4.2B.2.10.9-5: $T_{\text{detect,NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	T _{detect,NR_Inter_RedCap_Relax} [s] (number of DRX cycles)	T _{measure,NR_Inter_RedCap_Relax} [s] (number of DRX cycles)	T _{evaluate,NR_Inter_RedCap_Relax} [s] (number of DRX)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥3.84 (3)	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil \times K$ (23 x K1)	0.32 x 1.5 x K1 (1 x M2 x K1)	0.64 x 1.5 x K1 (2 x M2 x K1)
	0.64	≥3.84 (3)		0.64 x K1 (1 x K1)	1.28 x K1 (2 x K1)
	1.28	≥7.68 (6)		1.28 x K1 (1 x K1)	2.56 x K1 (2 x K1)
	2.56	≥15.36 (12)		2.56 x K1 (1 x K1)	5.12 x K1 (2 x K1)
Note 1: The number of DRX cycles in this table corresponds to the DRX cycles within PTWs. Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].					

Note 3:	The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,NR_Intra_RedCap_Relax}} \cdot \text{DRX_cycle}}{1.28} \right\rceil * 1.28$.
Note 4:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.

Table 4.2B.2.10.9-6: $T_{\text{detect,NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	T _{detect,NR_Inter_RedCap_Relax} [s] (number of DRX)	T _{measure,NR_Inter_RedCap_Relax} [s] (number of DRX cycles)	T _{evaluate,NR_Inter_RedCap_Relax} [s] (number of DRX cycles)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥15.36 (12)	8	$K1 \times eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW / DRX_cycle_length} \right\rceil$ (23 × N1 × K1)	0.32 × N1 × K1 (1 × N1 × K1)	0.64 × N1 × K1 (2 × N1 × K1)
	0.64	≥19.2 (15)	5		0.64 × N1 × K1 (1 × N1 × K1)	1.28 × N1 × K1 (2 × N1 × K1)
	1.28	≥30.72 (24)	4		1.28 × N1 × K1 (1 × N1 × K1)	2.56 × N1 × K1 (2 × N1 × K1)
	2.56	40.96 (32)	3		20.48 (8)	40.96 (16)
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: The number of DRX cycles in this table corresponds to the DRX cycles within PTWs. Note 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39]. Note 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,NR_Inter_RedCap_Relax}} \times \text{DRX_cycle}}{1.28} \right\rceil \times 1.28$. Note 5: The measurement shall not be performed across PTW's. In this case the measurement is performed in the next available PTW. Note 6: The evaluation shall not be performed across PTW's. Note 7: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation criterion</i> [2].						

4.2B.2.10.10 Measurements for UE fulfilling not-at-cell edge criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with *cellEdgeEvaluation* [2] criterion, and UE is not configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled the *cellEdgeEvaluation* [2] criterion or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] is not configured, and UE has fulfilled only the *cellEdgeEvaluation* [2] criterion.

When $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$ then the requirements defined in clause 4.2B.2.4 apply for this clause except that:

- For a UE not configured with eDRX_IDLE, $T_{\text{detect,NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ are as specified in Table 4.2B.2.10.10-1 and Table 4.2B.2.10.10-2 for 1 Rx RedCap and 2 Rx RedCap respectively.
- For a UE configured with eDRX_IDLE up-to 10.24s, $T_{\text{detect,NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ are as specified in Table 4.2B.2.10.10-3 and Table 4.2B.2.10.10-4 for 1 Rx RedCap and 2 Rx RedCap respectively.
- For a UE configured with eDRX_IDLE greater than 10.24s, $T_{\text{detect,NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ are as specified in Table 4.2B.2.10.10-5 and Table 4.2B.2.10.10-6 for 1 Rx RedCap and 2 Rx RedCap respectively, provided eDRX_IDLE cycle is $\leq [163.84]$ sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

When $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$ and regardless of whether the UE is configured with *highPriorityMeasRelax* [2] or not, the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2B.2.7

Table 4.2B.2.10.10-1: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UEs fulfilling low mobility criterion for 1 Rx RedCap UE

DRX cycle length [s]	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of DRX cycles)
0.32	$11.52 \times 1.5 \times K1$ ($36 \times 1.5 \times K1$)	$1.28 \times 1.5 \times K1$ ($4 \times 1.5 \times K1$)	$5.12 \times 1.5 \times K1$ ($16 \times 1.5 \times K1$)
0.64	$17.92 \times K1$ ($28 \times K1$)	$1.28 \times K1$ ($2 \times K1$)	$5.12 \times K1$ ($8 \times K1$)
1.28	$32 \times K1$ ($25 \times K1$)	$1.28 \times K1$ ($1 \times K1$)	$6.4 \times K1$ ($5 \times K1$)
2.56	$58.88 \times K1$ ($23 \times K1$)	$2.56 \times K1$ ($1 \times K1$)	$7.68 \times K1$ ($3 \times K1$)
Note 1: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.			

Table 4.2B.2.10.10-2: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UEs fulfilling low mobility criterion for 2 Rx RedCap UE

DRX cycle length [s]	Scaling Factor (N1)		Tdetect,NR_Inter RedCap_Relax [s] (number of DRX cycles)	Tmeasure,NR_Inter RedCap_Relax [s] (number of DRX cycles)	Tevaluate,NR_Inter RedCap_Relax [s] (number of DRX cycles)
	FR1	FR2 ^{Note1}			
0.32	1	8	11.52 x N1 x 1.5 x K1 (36 x N1 x 1.5 x K1)	1.28 x N1 x 1.5 x K1 (4 x N1 x 1.5 x K1)	5.12 x N1 x 1.5 x K1 (16 x N1 x 1.5 x K1)
0.64		5	17.92 x N1 x K1 (28 x N1 x K1)	1.28 x N1 x K1 (2 x N1 x K1)	5.12 x N1 x K1 (8 x N1 x K1)
1.28		4	32 x N1 x K1 (25 x N1 x K1)	1.28 x N1 x K1 (1 x N1 x K1)	6.4 x N1 x K1 (5 x N1 x K1)
2.56		3	58.88 x N1 x K1 (23 x N1 x K1)	2.56 x N1 x K1 (1 x N1 x K1)	7.68 x N1 x K1 (3 x N1 x K1)
Note 1:	Applies for RedCap UE of all supporting FR2 power classes.				
Note 2:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.				

Table 4.2B.2.10.10-3: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle upto 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of eDRX_IDLE cycles)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of eDRX_IDLE cycles)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times K1$ ($23 \times K1$)	$2.56 \times K1$ ($1 \times K1$)	$7.68 \times N1 \times K1$ ($3 \times N1 \times K1$)
5.12	$117.76 \times K1$ ($23 \times K1$)	$5.12 \times K1$ ($1 \times K1$)	$10.24 \times N1 \times K1$ ($2 \times N1 \times K1$)
10.24	$235.52 \times K1$ ($23 \times K1$)	$10.24 \times K1$ ($1 \times K1$)	$20.48 \times N1 \times K1$ ($2 \times N1 \times K1$)
Note 1: Void..			
Note 2: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.			

Table 4.2B.2.10.10-4: $T_{detect,NR_Inter_RedCap_Relax}$, $T_{measure,NR_Inter_RedCap_Relax}$ and $T_{evaluate,NR_Inter_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle upto 10.24s (Frequency range FR2)

eDRX_IDLE cycle length [s]	$T_{detect,NR_Inter_RedCap_Relax}$ [s] (number of eDRX_IDLE cycles)	$T_{measure,NR_Inter_RedCap_Relax}$ [s] (number of eDRX_IDLE cycles)	$T_{evaluate,NR_Inter_RedCap_Relax}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times N1 \times K1$ ($23 \times N1 \times K1$)	$2.56 \times N1 \times K1$ ($1 \times N1 \times K1$)	$7.68 \times N1 \times K1$ ($3 \times N1 \times K1$)
5.12	$117.76 \times N1 \times K1$ ($23 \times N1 \times K1$)	$5.12 \times N1 \times K1$ ($1 \times N1 \times K1$)	$10.24 \times N1 \times K1$ ($2 \times N1 \times K1$)
10.24	$235.52 \times N1 \times K1$ ($23 \times N1 \times K1$)	$10.24 \times N1 \times K1$ ($1 \times N1 \times K1$)	$20.48 \times N1 \times K1$ ($2 \times N1 \times K1$)

- Note 1: Void.
- Note 2: N1 = 3 for RedCap UE of all supporting FR2 power classes..
- Note 3: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the *cellEdgeEvaluation* [2] criterion.

Table 4.2B.2.10.10-5: $T_{\text{detect,NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	T _{detect,NR_Inter_RedCap_Relax} [s] (number of DRX cycles)	T _{measure,NR_Inter_RedCap_Relax} [s] (number of DRX cycles)	T _{evaluate,NR_Inter_RedCap_Relax} [s] (number of DRX cycles)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥3.84 (3)	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil \times K$ (23 x K1)	0.32 x M2 x K1 (1 x M2 x K1)	0.64 x M2 x K1 (2 x M2 x K1)
	0.64	≥3.84 (3)		0.64 x K1 (1 x K1)	1.28 x K1 (2 x K1)
	1.28	≥7.68 (6)		1.28 x K1 (1 x K1)	2.56 x K1 (2 x K1)
	2.56	≥15.36 (12)		2.56 x K1 (1 x K1)	5.12 x K1 (2 x K1)
Note 1: The number of DRX cycles in this table correspond to the DRX cycles within PTWs. Note 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39]. Note 3: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,NR_Intra_RedCap_Relax}} \times DRX_cycle}{1.28} \right\rceil * 1.28$. Note 4: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer T_{detect, NR_intra_RedCap_Relax} is expected. Note 5: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.					

Table 4.2B.2.10.10-6: $T_{\text{detect,NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	Scaling Factor (N1) Note1	T _{detect,NR_Inter_RedCap_Relax} [s] (number of DRX cycles)	T _{measure,NR_Inter_RedCap_Relax} [s] (number of DRX cycles)	T _{evaluate,NR_Inter_RedCap_Relax} [s] (number of DRX cycles)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥15.36 (12)	8	$K1 \times eDRX_cycle_length \times \left\lceil \frac{23 \times N1}{PTW/DRX_cycle_length} \right\rceil$ (23 × N1 × K1)	0.32 × N1 × K1 (1 × N1 × K1)	0.64 × N1 × K1 (2 × N1 × K1)
	0.64	≥19.2 (15)	5		0.64 × N1 × K1 (1 × N1 × K1)	1.28 × N1 × K1 (2 × N1 × K1)
	1.28	≥30.72 (24)	4		1.28 × N1 × K1 (1 × N1 × K1)	2.56 × N1 × K1 (2 × N1 × K1)
	2.56	40.96 (32)	3		20.48 (8)	40.96 (16)
Note 1: Applies for RedCap UE of all supporting FR2 power classes. Note 2: The number of DRX cycles in this table corresponds to the DRX cycles within PTWs. Note 3: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].						

Note 4:	The lower bound of PTW length is derived based on $\left\lceil \frac{T_{\text{evaluate,NR_Inter_RedCap_Relax*DRX_cycle}}}{1.28} \right\rceil * 1.28$.
Note 5:	The measurement shall not be performed across PTW's. In this case the measurement is performed in the next available PTW.
Note 6:	The evaluation shall not be performed across PTW's.
Note 7:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation criterion</i> [2].

4.2B.2.10.11 Measurements for UE fulfilling low mobility and not-at-cell edge criterion

This clause contains requirements for measurements on inter-frequency NR cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has fulfilled both criteria, and
- less than 1 hour have passed since measurements for cell reselection were last performed

In this case the UE is not required to meet $T_{\text{detect,NR_Inter_RedCap}}$, $T_{\text{measure,NR_Inter_RedCap}}$ and $T_{\text{evaluate,NR_Inter_RedCap}}$ as defined in clause 4.2B.2.4.

When $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$, the UE shall search for, measure and evaluate inter-frequency layers of higher, equal or lower priority at least every 1 hours.

When $S_{\text{rxlev}} > S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} > S_{\text{nonIntraSearchQ}}$, the UE shall search for inter-frequency layers of higher priority at least every $K2 * T_{\text{higher_priority_search}}$ where $T_{\text{higher_priority_search}}$ is described in clause 4.2.2.7 and $K2=60$.

The requirements defined in this clause apply regardless of eDRX_IDLE configurations.

4.2B.2.11 Measurements of inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion

4.2B.2.11.1 Introduction

This clause contains the requirements for measurements on inter-RAT E-UTRAN cells when the UE is configured any of the following relaxed measurement criteria:

- Relaxed measurement criterion for a stationary UE defined in clause 5.2.4.9.3 in [1],
- Relaxed measurement criterion for a stationary UE not at cell edge defined in clause 5.2.4.9.4 in [1],
- Both low mobility criterion and stationary criterion as defined in clause 5.2.4.9.1 and 5.2.4.9.3 in [1] respectively.
- Relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in [1],
- Relaxed measurement criterion for UE not-at-cell edge defined in clause 5.2.4.9.2 in [1],
- Both low mobility criterion and not-at-cell edge criterion as defined in clauses 5.2.4.9.1 and 5.2.4.9.2 in [1] respectively.

4.2B.2.11.2 Measurements for UE fulfilling stationary criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with *stationaryMobilityEvaluation* [2] criterion and UE is not configured with *cellEdgeEvaluationWhileStationary* [2] criterion and UE has fulfilled the *stationaryMobilityEvaluation* [2] criterion, or

- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] is not configured, and UE has fulfilled only the *stationaryMobilityEvaluation* [2] criterion

When $S_{rxlev} \leq S_{nonIntraSearchP}$ or $S_{qual} \leq S_{nonIntraSearchQ}$ then the requirements defined in clause 4.2B.2.5 apply for this clause except that:

- For a UE not configured with eDRX_IDLE, $T_{detect,EUTRAN_RedCap_Relax}$, $T_{measure,EUTRAN_RedCap_Relax}$ and $T_{evaluate,EUTRAN_RedCap_Relax}$ are as specified in Table 4.2B.2.11.2-1.
- For a UE configured with eDRX_IDLE up-to 10.24s, $T_{detect,EUTRAN_RedCap_Relax}$, $T_{measure,EUTRAN_RedCap_Relax}$ and $T_{evaluate,EUTRAN_RedCap_Relax}$ are as specified in Table 4.2B.2.11.2-2.
- For a UE configured with eDRX_IDLE greater than 10.24s, $T_{detect,EUTRAN_RedCap_Relax}$, $T_{measure,EUTRAN_RedCap_Relax}$ and $T_{evaluate,EUTRAN_RedCap_Relax}$ are as specified in Table 4.2B.2.11.2-3, provided eDRX_IDLE cycle is $\leq [163.84]$ sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

When $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$ then the UE shall search for E-UTRA inter-RAT frequency layers of higher priority at least every $K2 \cdot T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7 and, $K2 = 240$.

Table 4.2B.2.11.2-1: $T_{detect,EUTRAN_RedCap_Relax}$, $T_{measure,EUTRAN_RedCap_Relax}$, and $T_{evaluate,EUTRAN_RedCap_Relax}$

DRX cycle length [s]	$T_{detect,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles)
0.32	$11.52 \times K3$ ($36 \times K3$)	$1.28 \times K3$ ($4 \times K3$)	$5.12 \times K3$ ($16 \times K3$)
0.64	$17.92 \times K3$ ($28 \times K3$)	$1.28 \times K3$ ($2 \times K3$)	$5.12 \times K3$ ($8 \times K3$)
1.28	$32 \times K3$ ($25 \times K3$)	$1.28 \times K3$ ($1 \times K3$)	$6.4 \times K3$ ($5 \times K3$)
2.56	$58.88 \times K3$ ($23 \times K3$)	$2.56 \times K3$ ($1 \times K3$)	$7.68 \times K3$ ($3 \times K3$)
Note 1: $K3 = 6$ is the measurement relaxation factor applicable for UE fulfilling the <i>stationaryMobilityEvaluation</i> [2] criterion.			

Table 4.2B.2.11.2-2: $T_{detect,E-UTRAN_RedCap_Relax}$, $T_{measure,E-UTRAN_RedCap_Relax}$ and $T_{evaluate,E-UTRAN_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle upto 10.24s

eDRX_IDLE cycle length [s]	$T_{detect,E-UTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,E-UTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,E-UTRAN_RedCap_Relax}$ [s] (number of DRX cycles)
2.56	$58.88 \times K3$ ($23 \times K3$)	$2.56 \times K3$ ($1 \times K3$)	$7.68 \times K3$ ($3 \times K3$)
5.12	$117.76 \times K3$ ($23 \times K3$)	$5.12 \times K3$ ($1 \times K3$)	$10.24 \times K3$ ($2 \times K3$)
10.24	$235.52 \times K3$ ($23 \times K3$)	$10.24 \times K3$ ($1 \times K3$)	$20.48 \times K3$ ($2 \times K3$)
Note 1: Void. Note 2: $K3 = 6$ is the measurement relaxation factor applicable for UE fulfilling the <i>stationaryMobilityEvaluation</i> [2] criterion.			

Table 4.2B.2.11.2-3: $T_{detect,E-UTRAN_RedCap_Relax}$, $T_{measure,E-UTRAN_RedCap_Relax}$ and $T_{evaluate,E-UTRAN_RedCap_Relax}$ for UE configured with eDRX_IDLE cycle greater than 10.24s

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	$T_{detect,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,E-UTRAN_RedCap_Relax}$ [s] (number of DRX cycles)
----------------------------	----------------------	--	---	--	--

10.24 ≤ eDRX_IDLE cycle length ≤ [163.84]	0.32	≥6.4 (5)	$eDRX_cycle_length \times \left\lceil \frac{K3 \times 23}{PTW / DRX_cycle_length} \right\rceil$ (23 x K3)	0.32 x K3 (1 x K3)	0.64 x K3 (2 x K3)
	0.64	≥12.8 (10)		0.64 x K3 (1 x K3)	1.28 x K3 (2 x K3)
	1.28	≥15.36 (12)		1.28 x K3 (1 x K3)	2.56 x K3 (2 x K3)
	2.56	≥30.72 (4)		2.56 x K3 (1 x K3)	5.12 x K3 (2 x K3)
NOTE 1: The number of DRX cycles in this table corresponds to the DRX cycles within PTWs.					
NOTE 2: The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].					
NOTE 3: Void.					
NOTE 4: The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,E-UTRAN_RedCap_Relax} \times DRX_cycle}{1.28} \right\rceil * 1.28$.					
NOTE 5: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the <i>stationaryMobilityEvaluation</i> [2] criterion.					

4.2B.2.11.3 Measurements for a UE not-at-cell edge while stationary criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and has fulfilled both criteria, and
- less than 4 hours have passed since measurements for cell reselection were last performed.

In this case the UE is not required to meet $T_{detect,EUTRAN_RedCap}$, $T_{measure,EUTRAN_RedCap}$ and $T_{evaluate,EUTRAN_RedCap}$ as defined in clause 4.2B.2.5.

When $S_{rxlev} \leq S_{nonIntraSearchP}$ or $S_{qual} \leq S_{nonIntraSearchQ}$, the UE shall search for, measure and evaluate inter-RAT E-UTRAN layers of higher or lower priority at least every 4 hour.

When $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$, the UE shall search for inter-RAT E-UTRAN of higher priority at least every $K2 \cdot T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7 and $K2=240$.

The requirements defined in this clause apply regardless of eDRX_IDLE configurations.

4.2B.2.11.3A Measurements for a UE fulfilling stationary and not-at-cell-edge criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has fulfilled both criteria, or,
- UE is configured with *cellEdgeEvaluation* [2] criterion *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] is not configured, and UE has fulfilled *cellEdgeEvaluation* and *stationaryMobilityEvaluation* [2] criterion.

When $S_{rxlev} \leq S_{nonIntraSearchP}$ or $S_{qual} \leq S_{nonIntraSearchQ}$ then the requirements defined in clause 4.2B.2.5 apply for this clause except that:

- For a UE not configured with eDRX_IDLE, $T_{detect,EUTRAN_RedCap_Relax}$, $T_{measure,EUTRAN_RedCap_Relax}$ and $T_{evaluate,EUTRAN_RedCap_Relax}$ are as specified in Table 4.2B.2.11.2-1.
- For a UE configured with eDRX_IDLE up-to 10.24s, $T_{detect,EUTRAN_RedCap_Relax}$, $T_{measure,EUTRAN_RedCap_Relax}$ and $T_{evaluate,EUTRAN_RedCap_Relax}$ are as specified in Table 4.2B.2.11.2-2.
- For a UE configured with eDRX_IDLE greater than 10.24s, $T_{detect,EUTRAN_RedCap_Relax}$, $T_{measure,EUTRAN_RedCap_Relax}$ and $T_{evaluate,EUTRAN_RedCap_Relax}$ are as specified in Table 4.2B.2.11.2-3, provided eDRX_IDLE cycle is ≤ [163.84] sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

When $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$, the UE shall search for inter-RAT E-UTRAN of higher priority at least every $K2 \cdot T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2.7 and $K2=240$.

4.2B.2.11.4 Measurements for a UE fulfilling low mobility and stationary criteria

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and *stationaryMobilityEvaluation* [2] criterion, and has also fulfilled both criteria, or,
- UE is configured with *lowMobilityEvaluation* [2] criterion and with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] is not configured, and UE has fulfilled *lowMobilityEvaluation* and *stationaryMobilityEvaluation* [2] criteria

The requirements defined in clause 4.2B.2.11.2 apply for this clause.

4.2B.2.11.5 Measurements for a UE fulfilling low mobility and stationary not-at-cell-edge while stationary criteria

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and UE has fulfilled this criterion, and
- UE is configured with *stationaryMobilityEvaluation* [2] and *cellEdgeEvaluationWhileStationary* [2] criterion, and UE has fulfilled both criteria

The requirements defined in clause 4.2B.2.11.3 apply for this clause.

4.2B.2.11.6 Measurements for a UE fulfilling not-at-cell edge and not-at-cell edge while stationary criteria

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with *cellEdgeEvaluation* [2] criterion and UE has fulfilled that criterion, and
- UE is configured with *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and has fulfilled both criteria

The requirements defined in clause 4.2B.2.11.3 apply for this clause.

4.2B.2.11.7 Measurements for a UE fulfilling low mobility and not-at-cell edge criteria and not-at-cell-edge while stationary criteria

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has fulfilled both criteria, and
- UE is configured with *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion, and has also fulfilled both criteria

The requirements defined in clause 4.2B.2.11.3 apply for this clause.

4.2B.2.11.8 Measurements for a UE fulfilling low mobility, not-at-cell edge and stationary criteria

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and has fulfilled both criteria, and
- UE is configured with *stationaryMobilityEvaluation* [2] criterion and has also fulfilled that criterion, or UE is configured with both *stationaryMobilityEvaluation* [2] criterion and *cellEdgeEvaluationWhileStationary* [2] criterion and *combineRelaxedMeasCondition2* [2] is not configured, and UE has fulfilled *stationaryMobilityEvaluation* [2] criteria.

In this case the UE is not required to meet $T_{\text{detect,NR_Inter_RedCap}}$, $T_{\text{measure,NR_Inter_RedCap}}$ and $T_{\text{evaluate,NR_Inter_RedCap}}$ as defined in clause 4.2B.2.5.

When $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$, the requirements of $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$ defined in clause 4.2.2.11.4 apply for this clause.

When $S_{\text{rxlev}} > S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} > S_{\text{nonIntraSearchQ}}$, the UE the requirements of $S_{\text{rxlev}} > S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} > S_{\text{nonIntraSearchQ}}$ defined in clause 4.2B.2.11.2 apply for this clause.

4.2B.2.11.9 Measurements for UE fulfilling low mobility criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with *lowMobilityEvaluation* [2] criterion and UE is not configured with *cellEdgeEvaluation* [2] criterion and UE has fulfilled the *lowMobilityEvaluation* [2] criterion, or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] is not configured, and UE has fulfilled only the *lowMobilityEvaluation* [2] criterion.

When $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$ then the requirements defined in clause 4.2B.2.5 apply for this clause except that:

- For a UE not configured with eDRX_IDLE, $T_{\text{detect,EUTRAN_RedCap_Relax}}$, $T_{\text{measure,EUTRAN_RedCap_Relax}}$ and $T_{\text{evaluate,EUTRAN_RedCap_Relax}}$ are as specified in Table 4.2B.2.11.9-1.
- For a UE configured with eDRX_IDLE up-to 10.24s, $T_{\text{detect,EUTRAN_RedCap_Relax}}$, $T_{\text{measure,EUTRAN_RedCap_Relax}}$ and $T_{\text{evaluate,EUTRAN_RedCap_Relax}}$ are as specified in Table 4.2B.2.11.9-2.
- For a UE configured with eDRX_IDLE greater than 10.24s, $T_{\text{detect,EUTRAN_RedCap_Relax}}$, $T_{\text{measure,EUTRAN_RedCap_Relax}}$ and $T_{\text{evaluate,EUTRAN_RedCap_Relax}}$ are as specified in Table 4.2B.2.11.9-3, provided eDRX_IDLE cycle is $\leq [163.84]$ sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

When $S_{\text{rxlev}} > S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} > S_{\text{nonIntraSearchQ}}$ and the UE is configured with *highPriorityMeasRelax* [2] then the UE shall search for E-UTRA inter-RAT frequency layers of higher priority at least every $K2 \cdot T_{\text{higher_priority_search}}$ seconds where $T_{\text{higher_priority_search}}$ is described in clause 4.2B.2.7 and, $K2 = 60$. Otherwise, if the UE is not configured with *highPriorityMeasRelax* [2] then the UE shall search for E-UTRA inter-RAT frequency layers of higher priority at least every $T_{\text{higher_priority_search}}$ where $T_{\text{higher_priority_search}}$ is described in clause 4.2B.2.7.

Table 4.2B.2.11.9-1: $T_{\text{detect,EUTRAN_RedCap_Relax}}$, $T_{\text{measure,EUTRAN_RedCap_Relax}}$, and $T_{\text{evaluate,EUTRAN_RedCap_Relax}}$

DRX cycle length [s]	$T_{\text{detect,EUTRAN_RedCap_Relax}}$ [s] (number of DRX cycles)	$T_{\text{measure,EUTRAN_RedCap_Relax}}$ [s] (number of DRX cycles)	$T_{\text{evaluate,EUTRAN_RedCap_Relax}}$ [s] (number of DRX cycles)
0.32	$11.52 \times K1$ ($36 \times K1$)	$1.28 \times K1$ ($4 \times K1$)	$5.12 \times K1$ ($16 \times K1$)
0.64	$17.92 \times K1$ ($28 \times K1$)	$1.28 \times K1$ ($2 \times K1$)	$5.12 \times K1$ ($8 \times K1$)
1.28	$32 \times K1$ ($25 \times K1$)	$1.28 \times K1$ ($1 \times K1$)	$6.4 \times K1$ ($5 \times K1$)
2.56	$58.88 \times K1$ ($23 \times K1$)	2.56 ($1 \times K1$)	$7.68 \times K1$ ($3 \times K1$)
Note 1: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.			

Table 4.2B.2.11.9-2: $T_{\text{detect,EUTRAN_RedCap_Relax}}$, $T_{\text{measure,EUTRAN_RedCap_Relax}}$ and $T_{\text{evaluate,EUTRAN_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle upto 10.24s

eDRX_IDLE cycle length [s]	$T_{\text{detect,EUTRAN_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{measure,EUTRAN_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)	$T_{\text{evaluate,EUTRAN_RedCap_Relax}}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times K1$ (23 x K1)	2.56 (1 x K1)	$7.68 \times K1$ (3 x K1)
5.12	$117.76 \times K1$ (23 x K1)	$5.12 \times K1$ (1 x K1)	$10.24 \times K1$ (2 x K1)
10.24	$235.52 \times K1$ (23 x K1)	$10.24 \times K1$ (1 x K1)	$20.48 \times K1$ (2 x K1)
Note 1: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.			

Table 4.2B.2.11.9-3: $T_{\text{detect,EUTRAN_RedCap_Relax}}$, $T_{\text{measure,EUTRAN_RedCap_Relax}}$ and $T_{\text{evaluate,EUTRAN_RedCap_Relax}}$ for UE configured with eDRX_IDLE cycle greater than 10.24s (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	T _{detect, EUTRAN_RedCap_Relax} [s] (number of DRX cycles)	T _{measure, EUTRAN_RedCap_Relax} [s] (number of DRX cycles)	T _{evaluate, EUTRAN_RedCap_Relax} [s] (number of DRX cycles)
20.48 ≤ eDRX_IDLE cycle length ≤ [163.84]	0.32	≥3.84 (3)	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil \times K$ (23 x K1)	0.32 x K1 (1 x K1)	0.64 x K1 (2 x K1)
	0.64	≥3.84 (3)		0.64 x K1 (1 x K1)	1.28 x K1 (2 x K1)
	1.28	≥7.68 (6)		1.28 x K1 (1 x K1)	2.56 x K1 (2 x K1)
	2.56	≥15.36 (12)		2.56 x K1 (1 x K1)	5.12 x K1 (2 x K1)
Note 1:	The number of DRX cycles in this table corresponds to the DRX cycles within PTWs.				
Note 2:	The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].				
Note 3:	The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate, EUTRAN_RedCap_Relax} \times DRX_cycle}{1.28} \right\rceil \times 1.28$.				
Note 4:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion.				

4.2B.2.11.10 Measurements for UE fulfilling with not-at-cell edge criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with *cellEdgeEvaluation* [2] criterion and UE is not configured with *cellEdgeEvaluation* [2] criterion and UE has fulfilled the *cellEdgeEvaluation* [2] criterion, or
- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion and *combineRelaxedMeasCondition* [2] is not configured, and UE has fulfilled only the *cellEdgeEvaluation* [2] criterion.

When $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$ then the requirements defined in clause 4.2B.2.5 apply for this clause except that:

- For a UE not configured with eDRX_IDLE, $T_{\text{detect,EUTRAN_RedCap_Relax}}$, $T_{\text{measure,EUTRAN_RedCap_Relax}}$ and $T_{\text{evaluate,EUTRAN_RedCap_Relax}}$ are as specified in Table 4.2B.2.11.10-1.
- For a UE configured with eDRX_IDLE up-to 10.24s, $T_{\text{detect,EUTRAN_RedCap_Relax}}$, $T_{\text{measure,EUTRAN_RedCap_Relax}}$ and $T_{\text{evaluate,EUTRAN_RedCap_Relax}}$ are as specified in Table 4.2B.2.11.10-2.

- For a UE configured with $eDRX_IDLE$ greater than 10.24s, $T_{detect,EUTRAN_RedCap_Relax}$, $T_{measure,EUTRAN_RedCap_Relax}$ and $T_{evaluate,EUTRAN_RedCap_Relax}$ are as specified in Table 4.2B.2.11.10-3, provided $eDRX_IDLE$ cycle is $\leq [163.84]$ sec and evaluation/measurement time with relaxation on one carrier is not greater than single PTW window length.

When $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$, then regardless of whether the UE is configured with *highPriorityMeasRelax* [2] or not, the UE shall search for inter-RAT E-UTRAN frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2B.2.7.

Table 4.2B.2.11.10-1: $T_{detect,EUTRAN_RedCap_Relax}$, $T_{measure,EUTRAN_RedCap_Relax}$ and $T_{evaluate,EUTRAN_RedCap_Relax}$

DRX cycle length [s]	$T_{detect,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{measure,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles)	$T_{evaluate,EUTRAN_RedCap_Relax}$ [s] (number of DRX cycles)
0.32	$11.52 \times K1$ (36 x K1)	$1.28 \times K1$ (4 x K1)	$5.12 \times K1$ (16 x K1)
0.64	$17.92 \times K1$ (28 x K1)	$1.28 \times K1$ (2 x K1)	$5.12 \times K1$ (8 x K1)
1.28	$32 \times K1$ (25 x K1)	$1.28 \times K1$ (1 x K1)	$6.4 \times K1$ (5 x K1)
2.56	$58.88 \times K1$ (23 x K1)	$2.56 \times K1$ (1 x K1)	$7.68 \times K1$ (3 x K1)
Note 1: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.			

Table 4.2B.2.11.10-2: $T_{detect,EUTRAN_RedCap_Relax}$, $T_{measure,EUTRAN_RedCap_Relax}$ and $T_{evaluate,EUTRAN_RedCap_Relax}$ for UE configured with $eDRX_IDLE$ cycle upto 10.24s

eDRX_IDLE cycle length [s]	$T_{detect,EUTRAN_RedCap_Relax}$ [s] (number of eDRX_IDLE cycles)	$T_{measure,EUTRAN_RedCap_Relax}$ [s] (number of eDRX_IDLE cycles)	$T_{evaluate,EUTRAN_RedCap_Relax}$ [s] (number of eDRX_IDLE cycles)
2.56	$58.88 \times K1$ (23 x K1)	$2.56 \times K1$ (1 x K1)	$7.68 \times K1$ (3 x K1)
5.12	$117.76 \times K1$ (23 x K1)	$5.12 \times K1$ (1 x K1)	$10.24 \times K1$ (2 x K1)
10.24	$235.52 \times K1$ (23 x K1)	$10.24 \times K1$ (1 x K1)	$20.48 \times K1$ (2 x K1)
Note 1: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.			

Table 4.2B.2.11.10-3: $T_{detect,EUTRAN_RedCap_Relax}$, $T_{measure,EUTRAN_RedCap_Relax}$ and $T_{evaluate,EUTRAN_RedCap_Relax}$ for UE configured with $eDRX_IDLE$ cycle greater than 10.24s

eDRX_IDLE cycle length [s]	DRX cycle length [s]	PTW length [s] (number of 1.28s periods)	T _{detect, EUTRAN_RedCap_Relax} [s] (number of DRX cycles)	T _{measure, EUTRAN_RedCap_Relax} [s] (number of DRX cycles)	T _{evaluate, EUTRAN_RedCap_Relax} [s] (number of DRX cycles)
20.48 ≤ eDRX_IDLE cycle length ≤[163.84]	0.32	≥3.84 (3)	$eDRX_cycle_length \times \left\lceil \frac{23}{PTW/DRX_cycle_length} \right\rceil \times K1$ (23 x K1)	0.32 x K1 (1 x M2 x K1)	0.64 x K1 (2 x M2 x K1)
	0.64	≥3.84 (3)		0.64 x K1 (1 x K1)	1.28 x K1 (2 x K1)
	1.28	≥7.68 (6)		1.28 x K1 (1 x K1)	2.56 x K1 (2 x K1)
	2.56	≥15.36 (12)		2.56 x K1 (1 x K1)	5.12 x K1 (2 x K1)
Note 1:	The number of DRX cycles in this table correspond to the DRX cycles within PTWs.				
Note 2:	The eDRX_IDLE cycle lengths are as specified in Section 10.5.5.32 of TS 24.008 [39].				
Note 3:	The lower bound of PTW length is derived based on $\left\lceil \frac{T_{evaluate,NR_Intra_RedCap_Relax} \times DRX_cycle}{1.28} \right\rceil \times 1.28$.				
Note 4:	K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the cellEdgeEvaluation [2] criterion.				

4.2B.2.11.11 Measurements for UE fulfilling low mobility and not-at-cell edge criterion

This clause contains requirements for measurements on inter-RAT E-UTRAN cells provided that:

- UE is configured with both *lowMobilityEvaluation* [2] criterion and *cellEdgeEvaluation* [2] criterion, and both criteria are fulfilled, and
- less than 1 hour have passed since measurements for cell reselection were performed,

In this case the UE is not required to meet $T_{\text{detect,EUTRAN_RedCap}}$, $T_{\text{measure,EUTRAN_RedCap}}$ and $T_{\text{evaluate,EUTRAN_RedCap}}$ as defined in clause 4.2B.2.5.

When $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$, the UE shall search for, measure and evaluate inter-RAT E-UTRAN layers of higher or lower priority at least every 1 hour.

When $S_{\text{rxlev}} > S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} > S_{\text{nonIntraSearchQ}}$, the UE shall search for inter-RAT E-UTRAN layers of higher priority at least every $K2 \cdot T_{\text{higher_priority_search}}$ where $T_{\text{higher_priority_search}}$ is described in clause 4.2.2.7 and $K2=60$.

The requirements defined in this clause apply regardless of eDRX_IDLE configurations.

4.2C Cell Re-selection for NR UE for Satellite Access

4.2C.1 Introduction

The cell reselection procedure allows the UE to select a more suitable cell and camp on it.

When the UE is in either *Camped Normally* state or *Camped on Any Cell* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency and inter-frequency cells indicated by the serving cell. For intra-frequency and inter-frequency cells the serving cell may provide explicit neighbour list, or only carrier frequency information and bandwidth information. UE measurement activity is also controlled by measurement rules defined in TS 38.304 [1], allowing the UE to limit its measurement activity.

4.2C.2 Requirements

4.2C.2.1 UE measurement capability

For idle mode cell re-selection purposes, the UE shall be capable of monitoring at least:

- Intra-frequency carrier, and
- Depending on UE capability, 7 NR inter-frequency carriers.

4.2C.2.2 Measurement and evaluation of serving cell

The UE shall measure the SS-RSRP and SS-RSRQ level of the serving cell and evaluate the cell selection criterion S defined in TS 38.304 [1] for the serving cell at least once every $M1 \cdot N1$ DRX cycle; where:

- $M1=2$ if SMTC periodicity (T_{SMTC}) > 20 ms and DRX cycle ≤ 0.64 second and $N_{\text{SMTC}}=1$, upon one SMTC configured at the UE,
- $M1=2.5$ if SMTC periodicity (T_{SMTC}) > 20 ms and DRX cycle ≤ 0.64 second and $1 < N_{\text{SMTC}} \leq 4$,
- otherwise $M1=1$.

Where, N_{SMTC} is the number of SMTCs configured by SAN.

The UE shall filter the SS-RSRP and SS-RSRQ measurements of the serving cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by, at least DRX cycle/2.

If the UE has evaluated according to Table 4.2C.2.2-1 in N_{serv} consecutive DRX cycles that the serving cell does not fulfil the cell selection criterion S , the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities. Additionally, if the UE is

configured with ‘*t-service*’ [2], the UE shall start measurements of the neighbour cells indicated by the serving cell before ‘*t-service*’ is reached according to the requirements provided in clause 4.2C.2.3 and 4.2C.2.4. Also, if *distanceThresh* and *referenceLocation* are configured by the network [2] and the UE supports location-based measurement initiation and has obtained its location information, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell if the distance between UE and the serving cell reference location – *referenceLocation* – is larger than *distanceThresh*. The requirements apply provided that the distance exceeds the *distanceThresh* by a margin of 50 m.

If the UE is not configured with ‘*t-Service*’ [2] in the serving cell and if the UE in RRC_IDLE has not found any new suitable cell based on searches and measurements using the intra-frequency and inter-frequency information indicated in the system information for 10 s, the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 [1].

If the UE is configured with ‘*t-Service*’ in the serving cell then the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 when any of the following conditions is fulfilled:

- If the UE in RRC_IDLE has not found any new suitable cell based on searches and measurements using the intra-frequency and inter-frequency information indicated in the system information within 10 s since time instance T1 provided that ‘*t-Service*’ > T1 or
- If the UE in RRC_IDLE has not found any new suitable cell based on searches and measurements using the intra-frequency and inter-frequency information indicated in the system information within 10 s since the time instance ‘*t-Service*’.
- Where, T1 is the time instance in seconds when the UE has determined that the serving cell does not fulfil the cell selection criterion S.

Table 4.2C.2.2-1: N_{serv}

DRX cycle length [s]	Scaling Factor (N1)	N _{serv} [number of DRX cycles]
	FR1	
0.32	1	M1*N1*4
0.64		M1*N1*4
1.28		N1*2
2.56		N1*2
Note 1: The UE is not required to meet the requirements for 2.56s DRX cycle length for earth-moving LEO deployment.		

4.2C.2.3 Measurements of intra-frequency NR cells

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP and SS-RSRQ measurements of the identified intra-frequency cells without an explicit intra-frequency neighbour list containing physical layer cell identities.

If $S_{rxlev} > S_{IntraSearchP}$ and $S_{qual} > S_{IntraSearchQ}$, and the distance between UE and serving cell reference location is smaller than *distanceThresh* if the *distanceThresh* is configured (see TS 38.304[1]) and UE has location information, then the UE is not required to perform measurement of intra-frequency.

The UE shall be able to evaluate whether a newly detectable intra-frequency cell meets the reselection criteria defined in TS38.304 [1] within $K_{multi_SMTC} \cdot T_{detect,NR_Intra}$ when that $T_{reselection} = 0$ if the UE does not support Enhanced RRM requirements for measurements in IDLE and INACTIVE modes defined in TS38.306 [14] or if the *enhancedMeasurementNGSO-r17* is not enabled, or within $K_{multi_SMTC} \cdot T_{detect,NR_Intra_enh}$ if the UE supports Enhanced RRM requirements for measurements in IDLE and INACTIVE modes defined in TS38.306 [14] and the *enhancedMeasurementNGSO-r17* is enabled. An intra frequency cell is considered to be detectable according to the conditions defined in Annex B.1.6 for a corresponding Band.

The UE shall measure SS-RSRP and SS-RSRQ at least every $K_{multi_SMTC} \cdot T_{measure,NR_Intra}$ (see table 4.2C.2.3-1) if the UE does not support Enhanced RRM requirements for measurements in IDLE and INACTIVE modes defined in TS38.306 [14] or if the *enhancedMeasurementNGSO-r17* is not enabled, or every $K_{multi_SMTC} \cdot T_{measure,NR_Intra_enh}$ (see table 4.2C.2.3-2) if the UE supports Enhanced RRM requirements for measurements in IDLE and INACTIVE modes defined in TS38.306 [14] and the *enhancedMeasurementNGSO-r17* is enabled, for intra-frequency cells that are identified and measured according to the measurement rules.

The UE shall filter SS-RSRP and SS-RSRQ measurements of each measured intra-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{\text{measure,NR_Intra}}/2$.

The parameter $K_{\text{multi_SMTc}}$ is the scaling factor for measurements of multiple SMTcs which correspond to different satellites.

If SMTcs do not overlap with each other,

- $K_{\text{multi_SMTc}} = 1$, if GEO satellites are measured on the carrier;
- $K_{\text{multi_SMTc}} = \left\lceil \frac{N_{\text{LEO},i}}{N_{\text{LEO},\text{simul}}} \right\rceil$, if LEO satellites are measured on the carrier;
- If SMTcs partially overlap with each other,
 - $K_{\text{multi_SMTc}} = N_{\text{SMTc},\text{overlap}}$, if only GEO satellites are measured on the carrier;
 - $K_{\text{multi_SMTc}} = \sum_{i=1}^{N_{\text{SMTc},\text{overlap}}} \left\lceil \frac{N_{\text{LEO},i}}{N_{\text{LEO},\text{simul}}} \right\rceil$, if only LEO satellites are measured on the carrier;

where

$N_{\text{LEO},i}$ is the number of LEO satellites to be measured within i-th SMTc,

$N_{\text{LEO},\text{simul}}$ is the number of LEO satellites that UE can measure in parallel within an SMTc,

$N_{\text{SMTc},\text{overlap}}$ is the number of SMTcs that partially overlap with each other.

Note: for deriving $K_{\text{multi_SMTc}}$ for $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$, two SMTcs are considered as overlapping if they overlap in one or more occasions during a single $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ or $T_{\text{evaluate,NR_Intra}}$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an intra-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the intra-frequency cell has met reselection criterion defined in TS38.304 [1] within $K_{\text{multi_SMTc}} * T_{\text{evaluate,NR_Intra}}$ if the UE does not support Enhanced RRM requirements for measurements in IDLE and INACTIVE modes defined in TS38.306 [14] or if the *enhancedMeasurementNGSO-r17* is not enabled, or within $K_{\text{multi_SMTc}} * T_{\text{evaluate,NR_Intra_enh}}$ if the UE supports Enhanced RRM requirements for measurements in IDLE and INACTIVE modes defined in TS38.306 [14] and the *enhancedMeasurementNGSO-r17* is enabled, when $T_{\text{reselection}} = 0$ as specified in table 4.2C.2.3-1 or table 4.2C.2.3-2 provided that:

- when *rangeToBestCell* is not configured:
- the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2.
- when *rangeToBestCell* is configured:
- the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
- if there are multiple such cells, the cell has the highest rank among them.
 - the cell is at least 3dB better ranked in FR1 or 4.5dB better ranked in FR2 if the current serving cell is among them.

When evaluating cells for reselection, the SSB side conditions apply to both serving and non-serving intra-frequency cells.

If $T_{\text{reselection}}$ timer has a nonzero value and the intra-frequency cell is satisfied with the reselection criteria which are defined in TS38.304 [1], the UE shall evaluate this intra-frequency cell for the $T_{\text{reselection}}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

Table 4.2C.2.3-1: $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$

DRX cycle length [s]	Scaling Factor (N1)	$T_{\text{detect,NR_Intra}}$ [s] (number of DRX cycles)	$T_{\text{measure,NR_Intra}}$ [s] (number of DRX cycles)	$T_{\text{evaluate,NR_Intra}}$ [s] (number of DRX cycles)
	FR1			
0.32	1	$11.52 \times N1 \times M2$ (36 x N1 x M2)	$1.28 \times N1 \times M2$ (4 x N1 x M2)	$5.12 \times N1 \times M2$ (16 x N1 x M2)
0.64		$17.92 \times N1$ (28 x N1)	$1.28 \times N1$ (2 x N1)	$5.12 \times N1$ (8 x N1)
1.28		$32 \times N1$ (25 x N1)	$1.28 \times N1$ (1 x N1)	$6.4 \times N1$ (5 x N1)
2.56		$58.88 \times N1$ (23 x N1)	$2.56 \times N1$ (1 x N1)	$7.68 \times N1$ (3 x N1)
Note 1:	M2 = 2 if SMTC periodicity of measured intra-frequency cell > 20 ms and $1 < N_{\text{SMTC}} \leq 4$ upon more than 1 SMTC configured at the UE; M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms and $N_{\text{SMTC}}=1$ upon 1 SMTC configured at the UE; otherwise M2=1. Where, N_{SMTC} is the number of SMTCs configured by SAN If different SMTC periodicities are configured for different cells, the SMTC periodicity in this note is the one used by the cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed, and if the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{\text{detect, NR_intra}}$ is expected.			
Note 2:	The UE is not required to meet the requirements for 2.56s DRX cycle length for earth-moving LEO deployment.			

Table 4.2C.2.3-2: $T_{\text{detect,NR_Intra_enh}}$, $T_{\text{measure,NR_Intra_enh}}$ and $T_{\text{evaluate,NR_Intra_enh}}$

DRX cycle length [s]	$T_{\text{detect,NR_Intra_enh}}$ [s] (number of DRX cycles)	$T_{\text{measure,NR_Intra_enh}}$ [s] (number of DRX cycles)	$T_{\text{evaluate,NR_Intra_enh}}$ [s] (number of DRX cycles)
0.32	$2.56 \times M2$ (8 x M2) ^{Note 1}	$0.32 \times M3$ (1 x M3) ^{Note 1}	$0.96 \times M4$ (3 x M4) ^{Note 1}
0.64	5.12 (8)	0.64 (1)	1.92 (3)
1.28	8.96 (7)	1.28 (1)	3.84 (3)
2.56	58.88 (23)	2.56 (1)	7.68 (3)
Note 1: When $\text{SMTC} \leq 40$ ms, $M2 = M3 = M4 = 1$; and when $\text{SMTC} > 40$ ms, $M2 = 2$, $M3 = M4 = 2.5$			

If ‘*t-Service*’ is broadcasted and applicable, UE shall be able to detect, measure, and evaluate neighbour cells before the serving cell stops serving the area regardless of whether the distance condition based on serving cell reference location is met or the legacy S_{rxlev} / S_{qual} condition are met, and when to start the detection, measurement and evaluation on neighbour cells is up to UE implementation. This requirement does not apply when the time span from the last slot of SI transmission within SI modification period where the broadcasting of the last updated value for *t-Service* is acquired by the UE for the first time to the first slot when the cell is scheduled to stop serving the area according to the broadcasted information is less than T_{trigger} .

$$T_{\text{trigger}} = \max(K_{\text{multi_SMTC}} * T_{\text{detect,NR_Intra}}, K_{\text{multi_SMTC}} * K_{\text{carrier}} * T_{\text{detect,NR_Inter}}),$$

where

- K_{carrier} is the number of NR inter-frequency carriers indicated by the serving cell,
- $T_{\text{detect,NR_Intra}}$ refers to intra-frequency cell detection delay in IDLE/INACTIVE mode defined in Table 4.2C.2.3-2,
- $T_{\text{detect,NR_Inter}}$ refers to inter-frequency cell detection delay in IDLE/INACTIVE mode defined in Table 4.2C.2.4-2.

The requirements in this clause apply provided that the number of SMTCs for intra-frequency carrier does not exceed the *parallelSMTC-r17*, otherwise UE may select one or subset of all the configured SMTCs sequentially for performing the measurements until all of the SMTCs can be measured. The selection of SMTCs to be used is up to UE implementation, and in this case, measurement period longer than the corresponding measurement period specified in Table 4.2C.2.3-1 and Table 4.2C.2.3-2 is expected.

4.2C.2.4 Measurements of inter-frequency NR cells

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP or SS-RSRQ measurements of identified inter-frequency cells if carrier frequency information is provided by the serving cell, even if no explicit neighbour list with physical layer cell identities is provided.

If $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$, and the distance between UE and serving cell reference location is smaller than *distanceThresh* if *distanceThresh* is configured and UE has location information, then the UE shall search for inter-frequency layers of higher priority at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2C.2.9.

If $S_{rxlev} \leq S_{nonIntraSearchP}$ or $S_{qual} \leq S_{nonIntraSearchQ}$, or the distance between UE and serving cell reference location is larger than *distanceThresh* if *distanceThresh* is configured and UE has location information, then the UE shall search for and measure inter-frequency layers of higher, equal or lower priority in preparation for possible reselection. The requirements apply provided that the distance exceeds the *distanceThresh* by a margin of 50 m. In this scenario, the minimum rate at which the UE is required to search for and measure higher priority layers shall be the same as that defined below in this clause.

The UE shall be able to evaluate whether a newly detectable inter-frequency cell meets the reselection criteria defined in TS38.304 [1] within $\sum_{i=1}^{K_{carrier}} K_{multi_SMTC,i} * T_{detect,NR_Inter}$ if the UE does not support Enhanced RRM requirements for measurements in IDLE and INACTIVE modes defined in TS38.306 [14] or if the *enhancedMeasurementNGSO-r17* is not enabled, or within $\sum_{i=1}^{K_{carrier}} K_{multi_SMTC,i} * T_{detect,NR_Inter_enh}$ if the UE supports Enhanced RRM requirements for measurements in IDLE and INACTIVE modes defined in TS38.306 [14] and the *enhancedMeasurementNGSO-r17* is enabled, if at least carrier frequency information is provided for inter-frequency neighbour cells by the serving cells when $T_{reselection} = 0$ provided that the reselection criteria is met by a margin of at least [5]dB in FR1 for reselections based on ranking or [6]dB in FR1 for SS-RSRP reselections based on absolute priorities or [4]dB in FR1 for SS-RSRQ reselections based on absolute priorities. The parameter $K_{carrier}$ is the number of NR inter-frequency carriers indicated by the serving cell.

The parameter $K_{multi_SMTC,i}$ is the scaling factor for measurement of multiple SMTCs or multiple satellites

- If SMTCs do not overlap with each other,
 - $K_{multi_SMTC,i} = 1$, if GEO satellites are measured on the carrier;
 - $K_{multi_SMTC,i} = \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if LEO satellites are measured on the carrier;
- If SMTCs partially overlap with each other,
 - $K_{multi_SMTC,i} = N_{SMTC,overlap}$, if only GEO satellites are measured on the carrier;
 - $K_{multi_SMTC,i} = \sum_{i=1}^{N_{SMTC,overlap}} \left\lceil \frac{N_{LEO,i}}{N_{LEO,simul}} \right\rceil$, if only LEO satellites are measured on the carrier;

where

$N_{LEO,i}$ is the number of LEO satellites to be measured within i-th SMTC,

$N_{LEO,simul}$ is the number of LEO satellites that UE can measure in parallel within an SMTC, $N_{SMTC,overlap}$ is the number of SMTCs that partially overlap with each other.

Note: for deriving $K_{multi_SMTC,i}$ for T_{detect,NR_Inter} , $T_{measure,NR_Inter}$ and $T_{evaluate,NR_Inter}$ of frequency layer i , two SMTCs are considered as overlapping if they overlap in one or more occasions during a single T_{detect,NR_Inter} , $T_{measure,NR_Inter}$ or $T_{evaluate,NR_Inter}$.

An inter-frequency cell is considered to be detectable according to the conditions defined in Annex B.1.7 for a corresponding Band.

When higher priority cells are found by the higher priority search, they shall be measured at least every $T_{measure,NR_Inter}$. If, after detecting a cell in a higher priority search, it is determined that reselection has not occurred then the UE is not required to continuously measure the detected cell to evaluate the ongoing possibility of reselection. However, the minimum measurement filtering requirements specified later in this clause shall still be met by the UE before it makes any determination that it may stop measuring the cell. If the UE detects on a NR carrier a cell whose physical identity is

indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall measure SS-RSRP or SS-RSRQ at least every $\sum_{i=1}^{K_{carrier}} K_{multi_SMTC,i} * T_{measure,NR_Inter}$ (see table 4.2C.2.4-1) if the UE does not support Enhanced RRM requirements for measurements in IDLE and INACTIVE modes defined in TS38.306 [14] or if the *enhancedMeasurementNGSO-r17* is not enabled, or every $\sum_{i=1}^{K_{carrier}} K_{multi_SMTC,i} * T_{measure,NR_Inter_enh}$ (see table 4.2C.2.4-2) if the UE supports Enhanced RRM requirements for measurements in IDLE and INACTIVE modes defined in TS38.306 [14] and the *enhancedMeasurementNGSO-r17* is enabled, for identified lower or equal priority inter-frequency cells. If the UE detects on a NR carrier a cell whose physical identity is indicated as not allowed for that carrier in the measurement control system information of the serving cell, the UE is not required to perform measurements on that cell.

The UE shall filter SS-RSRP or SS-RSRQ measurements of each measured higher, lower and equal priority inter-frequency cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by at least $T_{measure,NR_Inter}/2$.

The UE shall not consider a NR neighbour cell in cell reselection, if it is indicated as not allowed in the measurement control system information of the serving cell.

For an inter-frequency cell that has been already detected, but that has not been reselected to, the filtering shall be such that the UE shall be capable of evaluating that the inter-frequency cell has met reselection criterion defined TS 38.304 [1] within $\sum_{i=1}^{K_{carrier}} K_{multi_SMTC,i} * T_{evaluate,NR_Inter}$ if the UE does not support Enhanced RRM requirements for measurements in IDLE and INACTIVE modes defined in TS38.306 [14] or if the *enhancedMeasurementNGSO-r17* is not enabled, or within $\sum_{i=1}^{K_{carrier}} K_{multi_SMTC,i} * T_{evaluate,NR_Inter_enh}$ if the UE supports Enhanced RRM requirements for measurements in IDLE and INACTIVE modes defined in TS38.306 [14] and the *enhancedMeasurementNGSO-r17* is enabled, when $T_{reselection} = 0$ as specified in table 4.2C.2.4-1 provided that the reselection criteria is met by

- the condition when performing equal priority reselection and when *rangeToBestCell* is not configured:
 - the cell is at least [5]dB better ranked in FR1 or.
- when *rangeToBestCell* is configured:
 - the cell has the highest number of beams above the threshold *absThreshSS-BlocksConsolidation* among all detected cells whose cell-ranking criterion R value in TS38.304 [1] is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.
 - if there are multiple such cells, the cell has the highest rank among them
 - the cell is at least [5]dB better ranked in FR1 if the current serving cell is among them. or
 - [6]dB in FR1 for SS-RSRP reselections based on absolute priorities or
 - 4]dB in FR1 for SS-RSRQ reselections based on absolute priorities.

When evaluating cells for reselection, the SSB side conditions apply to both serving and inter-frequency cells.

If $T_{reselection}$ timer has a non zero value and the inter-frequency cell is satisfied with the reselection criteria, the UE shall evaluate this inter-frequency cell for the $T_{reselection}$ time. If this cell remains satisfied with the reselection criteria within this duration, then the UE shall reselect that cell.

The UE is not expected to meet the measurement requirements for an inter-frequency carrier under DRX cycle=320 ms defined in Table 4.2C.2.4-1 under the following conditions:

- $T_{SMTC_intra} = T_{SMTC_inter} = 160$ ms; where
 - T_{SMTC_intra} is the periodicity of the SMTC configured for the intra-frequency carrier if no identified intra-frequency cell is in the PCI list of smtc2-LP on this intra-frequency carrier; T_{SMTC_intra} is the periodicity of the smtc2-LP configured for the intra-frequency carrier if at least one identified intra-frequency cell is in the PCI list of smtc2-LP on this intra-frequency carrier. During PSS/SSS detection, the periodicity of the SMTC configured for the intra-frequency carrier is assumed for T_{SMTC_intra} . If

the actual SSB transmission periodicity is greater than the SMTC configured for the intra-frequency carrier, longer $T_{\text{detect, NR_intra}}$ is expected.

- $T_{\text{SMTC_inter}}$ is the actual SMTC periodicity used by the inter-frequency cell being identified. During PSS/SSS detection, the periodicity of the SMTC configured for the inter-frequency carrier is assumed for $T_{\text{SMTC_inter}}$. If the actual SSB transmission periodicity is greater than the SMTC configured for the inter-frequency carrier, longer $T_{\text{detect, NR_inter}}$ is expected.
- SMTC occasions configured for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the SMTC occasions configured for the intra-frequency carrier, and
- SMTC occasions configured for the intra-frequency carrier and for the inter-frequency carrier occur up to 1 ms before the start or up to 1 ms after the end of the paging occasion in TS38.304 [1].

Table 4.2C.2.4-1: $T_{\text{detect, NR_Inter}}$, $T_{\text{measure, NR_Inter}}$ and $T_{\text{evaluate, NR_Inter}}$

DRX cycle length [s]	Scaling Factor (N1)	T _{detect,NR_Inter} [s] (number of DRX cycles)	T _{measure,NR_Inter} [s] (number of DRX cycles)	T _{evaluate,NR_Inter} [s] (number of DRX cycles)
	FR1			
0.32	1	11.52 x N1 x 1.5 (36 x N1 x 1.5)	1.28 x N1 x 1.5 (4 x N1 x 1.5)	5.12 x N1 x 1.5 (16 x N1 x 1.5)
0.64		17.92x N1 (28 x N1)	1.28 x N1 (2 x N1)	5.12 x N1 (8 x N1)
1.28		32 x N1 (25 x N1)	1.28 x N1 (1 x N1)	6.4 x N1 (5 x N1)
2.56		58.88 x N1 (23 x N1)	2.56 x N1 (1 x N1)	7.68 x N1 (3 x N1)
Note 1: UE is not required to fulfil the requirements for 2.56s DRX cycle length for earth-moving LEO deployment.				

Table 4.2C.2.4-2: $T_{\text{detect, NR_Inter_enh}}$, $T_{\text{measure, NR_Inter_enh}}$ and $T_{\text{evaluate, NR_Inter_enh}}$

DRX cycle length [s]	$T_{\text{detect, NR_Inter_enh}}$ [s] (number of DRX cycles)	$T_{\text{measure, NR_Inter_enh}}$ [s] (number of DRX cycles)	$T_{\text{evaluate, NR_Inter_enh}}$ [s] (number of DRX cycles)
0.32	$[3.2 \times M2 (10 \times M2)]$ Note 1	$[0.32 \times M3 ([1] \times M3)]$ Note 1	$0.96 \times M4 (3 \times M4)$ Note 1
0.64	$[6.4 (10)]$	$[0.64 (1)]$	$1.92 (3)$
1.28	$[10.24 (8)]$	$1.28 (1)$	$3.84 (3)$
2.56	$58.88 (23)$	$2.56 (1)$	$7.68 (3)$
Note 1: When $\text{SMTC} \leq 40$ ms, $M2 = M3 = M4 = 1$; and when $\text{SMTC} > 40$ ms, $M2 = 1.5$, $M3 = M4 = 2$			

If $t\text{-Service}$ is broadcasted and applicable, UE shall be able to detect, measure, and evaluate neighbour cells before the serving cell stops serving the area regardless of whether the distance condition based on serving cell reference location or the legacy $S_{\text{rxlev}}/S_{\text{squal}}$ condition is met, and when to start detection, measurement, and evaluation is up to UE implementation. This requirement does not apply when the time span from the last slot of SI transmission within SI modification period where the broadcasting of the last updated value for $t\text{-Service}$ is acquired by the UE for the first time to the first slot when the cell is scheduled to stop serving the area according to the broadcasted information is less than T_{trigger} , and $T_{\text{trigger}} = \max(K_{\text{multi_SMTC}} \cdot T_{\text{detect, NR_Intra}}, K_{\text{carrier}} \cdot T_{\text{detect, NR_Inter}})$ when serving cell is below the search threshold, and $T_{\text{trigger}} = \max(K_{\text{multi_SMTC}} \cdot T_{\text{detect, NR_Intra}}, N_{\text{layer}} \cdot [60\text{s}])$ when serving cell is above the search threshold, where

- K_{carrier} is the number of NR inter-frequency carriers indicated by the serving cell,
- N_{layer} is the total number of higher priority NR carrier frequencies broadcasted in system information,
- $T_{\text{detect, NR_Intra}}$ refers to HST intra-frequency cell detection delay in IDLE/INACTIVE mode defined Table 4.2.2.3-2,
- $T_{\text{detect, NR_Inter}}$ refers to HST inter-frequency cell detection delay in IDLE/INACTIVE mode defined Table 4.2.2.4-2.

The requirements in this clause apply provided that the number of SMTCs for any inter-frequency carrier does not exceed the *parallelSMTC-r17*, otherwise UE may select one or subset of all the configured SMTCs sequentially until all

of the SMTCs can be measured, the selection of SMTCs to be used is up to UE implementation, and longer measurement delay than the corresponding measurement period specified in Table 4.2C.2.4-1 and Table 4.2C.2.4-2 is expected.

The requirements in this clause apply provided that the valid information for the satellite serving the target cell has been provided by the serving cell.

The requirements in this clause apply provided that SSB of neighbour cells are within the time shifted SMTC.

4.2C.2.5 Maximum interruption in paging reception

UE shall perform the cell re-selection with minimum interruption in monitoring downlink channels for paging reception.

At intra-frequency and inter-frequency cell re-selection, the UE shall monitor the downlink of serving cell for paging reception until the UE is capable to start monitoring downlink channels of the target intra-frequency and inter-frequency cell for paging reception. The interruption time shall not exceed $T_{SI-NR} + K \cdot T_{\text{target_cell_SMTC_period}}$ ms.

Where,

If the target cell belongs to the same satellite as the current one, and if the target cell is known, then $K = 2$.

If the target cell belongs to a different satellite than the current one and the target cell's satellite is GEO, and if the target cell is known, then $K = 2$.

If the target cell belongs to a different satellite than the current one and the target cell's satellite is non-GEO, then $K = 5$ if the target cell is known.

$T_{\text{target_cell_SMTC_period}}$ is the periodicity of the SMTC occasions configured for the target NR cell. If the target cell is in the PCI list of *smtc2-LP*, the SMTC periodicity follows *smtc2-LP*; otherwise, the SMTC periodicity follows *smtc*.

T_{SI-NR} is the time required for receiving all the relevant system information data according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [2] for an NR cell.

The target cell is considered as known if it has been detectable during $T_{\text{detect,NR_Intra}}$ or $T_{\text{detect,NR_Inter}}$, and the time span between SIB broadcasting cell stop time and the cell stop time is not less than T_{trigger} . Otherwise, the target cell is considered as unknown, where $T_{\text{detect,NR_Intra}}$, $T_{\text{detect,NR_Inter}}$ and T_{trigger} are defined in 4.2C.2.3 and 4.2C.2.4. A longer interruption can be expected if the target cell is unknown.

These requirements assume sufficient radio conditions, so that decoding of system information can be made without errors and does not take into account cell re-selection failure.

4.2C.2.6 Minimum requirement at transitions

The requirements in clause 4.2.2.8 apply provided that target cell's satellite is GEO.

4.2C.2.7 Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion

The requirements in clause 4.2.2.9 apply provided that target cell's satellite is GEO.

4.2C.2.8 Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion

The requirements in clause 4.2.2.10 apply provided that target cell's satellite is GEO.

4.2C.2.9 General requirements

The UE shall search every layer of higher priority at least every $T_{\text{higher_priority_search}} = (60 * N_{\text{layers}})$ seconds, where N_{layers} is the total number of higher priority NR carrier frequencies broadcasted in system information.

4.3 Minimization of Drive Tests (MDT)

4.3.1 Introduction

UE supporting minimisation of drive tests in RRC_IDLE shall be capable of:

- logging measurements in RRC_IDLE, reporting the logged measurements and meeting requirements in clause 4.3;
- logging of RRC connection establishment failure, reporting the logged failure and meeting requirements in clause 4.3;
- logging of radio link failure and handover failure, reporting the logged failure and meeting requirements in clause 4.3.

The logged MDT requirements consist of measurement requirements as specified in clause 4.3.2 and relative time stamp accuracy requirements as specified in clause 4.3.3. Both sets of requirements are applicable for intra-frequency, inter-frequency and inter-RAT cases in RRC_IDLE state. The MDT procedures are described in TS 37.320 [31].

For RRC connection establishment failure logging and reporting, the MDT requirements consist of requirements for measurements performed and logged in RRC_IDLE state specified in clause 4.3.2 and relative time stamp accuracy requirement for RRC connection establishment failure log reporting as specified in clause 4.3.4.

4.3.2 Measurement Requirements

The requirements specified in this clause apply for the following measurements performed and logged by the UE for MDT in RRC_IDLE:

- inter-RAT E-UTRA FDD and TDD RSRP,
- inter-RAT E-UTRA FDD and TDD RSRQ,
- SS-RSRP per cell,
- SS-RSRQ per cell,
- SS-RSRP per SSB index of the serving cell,
- SS-RSRQ per SSB index of the serving cell,
- best SSB index of the serving cell,
- the number of SSBs with different SSB index which are above the threshold *absThreshSS-BlocksConsolidation* for all detected cells whose cell-ranking criterion R value is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.

The requirements apply for the measurements included in logged MDT reports and RRC connection establishment failure reports.

The measurement values that are used to meet

- serving cell and reselection requirements as specified in clauses 4.2.2.2–4.2.2.7
- shall also apply to values logged for MDT measurements in RRC_IDLE state.

4.3.3 Requirements for Relative Time Stamp Accuracy

The relative time stamp for a logged measurement is defined as the time from the moment the MDT configuration was received at the UE until the measurement was logged, see TS 38.331 [2].

The accuracy of the relative time stamping is such that the drift of the time stamping shall be not more than ± 2 seconds per hour.

4.3.4 Requirements for Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting

Relative time stamp for RRC connection establishment failure log reporting is defined as the time elapsed from the last RRC connection establishment failure to the time when the log is included in the report TS 38.331 [2]. The UE shall report the RRC connection establishment failure log, while meeting the accuracy requirement specified in this clause.

The accuracy of the relative time stamping for RRC connection establishment failure log reporting is such that the drift of the time stamping shall not be larger than ± 0.72 seconds per hour and ± 10 seconds over 48 hours. The relative time stamp accuracy requirements shall apply provided that:

- no power off or detach occurs after the RRC connection establishment failure had been detected and until the log is time-stamped.

4.3.5 Requirements for Relative Time Stamp Accuracy for Radio Link Failure and Handover Failure Log Reporting

The UE shall report the radio link and handover failure log, while meeting the accuracy requirements specified in this clause.

Relative time stamp accuracy requirements for *timeSinceFailure* reported for MDT in a radio link failure or handover failure log are specified in this clause. *timeSinceFailure* determines the time elapsed from the last radio link failure or handover failure in NR to the time when the log is included in the report TS 38.331 [2].

The accuracy of the relative time stamping for *timeSinceFailure* is such that the drift of the time stamping shall not be larger than ± 0.72 seconds per hour and ± 10 seconds over 48 hours. These relative time stamp accuracy requirements shall apply provided that:

- no power off or detach occurs after the RLF or handover failure had been detected and until the log is time-stamped.

4.3C Minimization of Drive Tests (MDT) for Satellite Access

Editor's note: the exact signalling names in the clause and values are subject to confirmation by RAN2 and change during performance requirement phase, respectively. And the brackets shall be removed by further agreements.

4.3C.1 Introduction

UE supporting minimisation of drive tests in RRC_IDLE shall be capable of:

- logging measurements in RRC_IDLE, reporting the logged measurements and meeting requirements in clause 4.3C;
- logging of RRC connection establishment failure, reporting the logged failure and meeting requirements in clause 4.3C;
- logging of radio link failure and handover failure, reporting the logged failure and meeting requirements in clause 4.3C.

The logged MDT requirements consist of measurement requirements as specified in clause 4.3C.2 and relative time stamp accuracy requirements as specified in clause 4.3C.3. Both sets of requirements are applicable for intra-frequency, inter-frequency and inter-RAT cases in RRC_IDLE state. The MDT procedures are described in TS 37.320 [31].

For RRC connection establishment failure logging and reporting, the MDT requirements consist of requirements for measurements performed and logged in RRC_IDLE state specified in clause 4.3C.2 and relative time stamp accuracy requirement for RRC connection establishment failure log reporting as specified in clause 4.3C.4.

4.3C.2 Measurement Requirements

The requirements specified in this clause apply for the following measurements performed and logged by the UE for MDT in RRC_IDLE:

- SS-RSRP per cell,
- SS-RSRQ per cell,
- SS-RSRP per SSB index of the serving cell,
- SS-RSRQ per SSB index of the serving cell,
- best SSB index of the serving cell,
- the number of SSBs with different SSB index which are above the threshold *absThreshSS-BlocksConsolidation* for all detected cells whose cell-ranking criterion R value is within *rangeToBestCell* of the cell-ranking criterion R value of the highest ranked cell.

The requirements apply for the measurements included in logged MDT reports and RRC connection establishment failure reports.

The measurement values that are used to meet

- serving cell and reselection requirements as specified in clauses 4.2C.2.2–4.2C.2.9

shall also apply to values logged for MDT measurements in RRC_IDLE state.

4.3C.3 Requirements for Relative Time Stamp Accuracy

The relative time stamp for a logged measurement is defined as the time from the moment the MDT configuration was received at the UE until the measurement was logged, see TS 38.331 [2].

The accuracy of the relative time stamping is such that the drift of the time stamping shall be not more than ± 2 seconds per hour.

4.3C.4 Requirements for Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting

Relative time stamp for RRC connection establishment failure log reporting is defined as the time elapsed from the last RRC connection establishment failure to the time when the log is included in the report TS 38.331 [2]. The UE shall report the RRC connection establishment failure log, while meeting the accuracy requirement specified in this clause.

The accuracy of the relative time stamping for RRC connection establishment failure log reporting is such that the drift of the time stamping shall not be larger than ± 0.72 seconds per hour and ± 10 seconds over 48 hours. The relative time stamp accuracy requirements shall apply provided that:

- no power off or detach occurs after the RRC connection establishment failure had been detected and until the log is time-stamped.

4.3C.5 Requirements for Relative Time Stamp Accuracy for Radio Link Failure and Handover Failure Log Reporting

The UE shall report the radio link and handover failure log, while meeting the accuracy requirements specified in this clause.

Relative time stamp accuracy requirements for *timeSinceFailure* reported for MDT in a radio link failure or handover failure log are specified in this clause. *timeSinceFailure* determines the time elapsed from the last radio link failure or handover failure in NR to the time when the log is included in the report TS 38.331 [2].

The accuracy of the relative time stamping for *timeSinceFailure* is such that the drift of the time stamping shall not be larger than ± 0.72 seconds per hour and ± 10 seconds over 48 hours. These relative time stamp accuracy requirements shall apply provided that:

- no power off or detach occurs after the RLF or handover failure had been detected and until the log is time-stamped.

4.4 Idle Mode CA/DC Measurements

4.4.1 Introduction

A UE supporting *idleInactiveNR-MeasReport-r16* or *idleInactiveEUTRA-MeasReport-r16* shall perform the idle mode measurement on the inter-frequency CA and DC candidate frequencies/cells and E-UTRAN inter-RAT DC candidate frequencies/cells indicated by higher layers and meet the requirement specified in this clause. The UE shall perform idle mode measurements provided that the serving cell support early measurement and is within the validity area. The idle mode measurement requirements apply to a configured carrier frequency and the serving cell are among the supported band combination of the UE.

4.4.2 Measurement Requirements

For a UE which supports *idleInactiveNR-MeasReport-r16* or *idleInactiveEUTRA-MeasReport-r16* the UE shall support the idle mode CA measurements on the serving cell, and carriers configured for idle mode CA/DC measurement reporting provided T331 has not expired, the serving cell is supporting idle mode CA/DC measurement reporting and the serving cell is in the validity area.

4.4.2.1 Detected cell requirement during state transition and Idle mode

This subclause defines the requirements for the detected cell status for the idle mode CA/DC measurement when UE transitions from RRC Connected mode to Idle mode and after UE has entered Idle mode. The requirements are applicable to an NE-DC and NR carrier aggregation capable UE which has been configured with one or more of following, one or more SCells, one E-UTRAN PSCell or one or more downlink E-UTRAN SCells during the Connected mode and which supports *idleInactiveNR-MeasReport-r16* or *idleInactiveEUTRA-MeasReport-r16*. The requirements are applicable for SCell(s) and E-UTRAN FDD and TDD PSCell and SCells.

Upon releasing the connection and if the UE has been configured with idle mode CA measurement reporting, following requirements apply concerning the detected cells in Connected mode upon state transitioning to Idle mode and during Idle mode:

- A cell which is detected cell in Connected mode prior to connection release, shall remain detected after UE has entered Idle mode and during Idle mode, provided that the following conditions are met:
 - The UE has been provided with a list of cells and/or carrier frequencies for early measurement reporting by dedicated RRC signaling and
 - The detected cell is among the list of cells or on a carrier frequency provided for early measurement reporting, and
 - The UE is provided with a valid timer T331 by dedicated RRC signaling, and

- The detected cell and SSBs remains detectable until UE reconnect to the network and transmits the early measurement report, and
- The carrier frequency of the detected cell and the carrier frequency of the serving cell are among the supported band combination of the UE.

An inter-RAT E-UTRAN cell is considered detectable according to RSRP, $\text{RSRP} \hat{E}_s/\text{Iot}$, SCH_RP and $\text{SCH} \hat{E}_s/\text{Iot}$ defined in Annex B.1.1 and Annex B.1.2 in [15] for a corresponding Band. An inter-frequency cell is considered detectable according to the conditions in Annex B.1.2 and B.1.3 for a corresponding band. An SSB of an inter-frequency cell is considered detectable according to SSB_RP and $\text{SSB} \hat{E}_s/\text{Iot}$ defined in Annex B.1.2 and B.1.3 for a corresponding Band.

4.4.2.2 Measurements of inter-frequency CA/DC candidate cells

While T331 is running, the UE shall perform measurement on the configured inter-frequency carriers for idle mode CA/DC measurement reporting according to the UE measurement capability.

A UE which supports *idleInactiveNR-MeasReport-r16* shall support idle mode CA/DC measurements of:

- at least 7 inter-frequency carriers which are also configured for inter-frequency mobility measurements, and
- at least 7 inter-frequency carriers which are not configured for inter-frequency mobility measurements.

The UE shall be capable of monitoring a total of at least 7 inter-frequency carriers for idle mode CA/DC measurements comprising of carriers configured for inter-frequency mobility measurements and carriers not configured for inter-frequency mobility measurements.

For inter-frequency carriers configured for idle mode CA/DC measurements, if $\text{Srxlev} \leq \text{S}_{\text{nonIntraSearchP}}$ or $\text{Squal} \leq \text{S}_{\text{nonIntraSearchQ}}$ the inter-frequency measurement requirements in clause 4.2.2.4 shall apply, where UE shall search for and measure inter-frequency layers configured for idle mode CA/DC measurements in preparation for possible reporting. If $\text{Srxlev} > \text{S}_{\text{nonIntraSearchP}}$ and $\text{Squal} > \text{S}_{\text{nonIntraSearchQ}}$ the UE shall search for inter-frequency layers configured for idle mode CA/DC measurements at least every $T_{\text{higher_priority_search}}$ where $T_{\text{higher_priority_search}}$ is described in clause 4.2.2.7, where UE shall search for and measure inter-frequency layers configured for idle mode CA/DC measurements in preparation for possible reporting.

For UE supporting *idleInactiveNR-MeasBeamReport-r16*, if the UE is configured with *beamMeasConfigIdle-r16* for idle mode CA/DC measurement, the UE shall be capable of performing SS-RSRP, SS-RSRQ for at least

- 7 SSBs with different SSB index and/or PCI on an inter-frequency layer in FR1,
- 10 SSBs with different SSB index and/or PCI on an inter-frequency layer in FR2.

For UE supporting *idleInactiveNR-MeasBeamReport-r16*, if the UE is configured with *beamMeasConfigIdle-r16* on one or more carrier for idle mode CA/DC measurement, the UE, on each carrier, shall be able to:

- detect a newly detectable inter-frequency NR cell and perform RSRP/RSRQ measurement in preparation for reporting, and
- acquire the SSB index for a newly detectable inter-frequency NR cell if *beamMeasConfigIdle-r16* is configured on this carrier and perform RSRP/RSRQ measurement in preparation for reporting,

within the requirements defined in clause 4.2.2.4 plus $k \cdot T_{\text{SSB_index,NR_Inter}}$, where k is the number of carriers configured for idle mode CA measurement with *beamMeasConfigIdle-r16*, and $T_{\text{SSB_index,NR_Inter}}$ is the additional time period used to acquire the index of the SSB being measured as defined in table 4.4.2.2-1.

Table 4.4.2.2-1: $T_{\text{SSB_index,NR_Inter}}$

DRX cycle length [s]	Scaling Factor (N1)		$T_{\text{SSB_index,NR_Inter}}$ [s] (number of DRX cycles)
	FR1	FR2 ^{Note1}	
0.32	1	8	$N2 \times 1.28 \times N1 \times 1.5$ ($N2 \times 4 \times N1 \times 1.5$)
0.64		5	$N2 \times 1.28 \times N1$ ($N2 \times 2 \times N1$)

1.28		4	$N2 \times 1.28 \times N1$ ($N2 \times 1 \times N1$)
2.56		3	$N2 \times 2.56 \times N1$ ($N2 \times 1 \times N1$)
Note 1: Applies for UE supporting power class 2&3&4. For UE supporting power class 1, $N1 = 8$ for all DRX cycle length. NOTE 2: $N2 = 3$ if the NR inter-frequency carrier for idle mode CA/DC measurement reporting is in FR1, and $N2 = 5$ if the NR inter-frequency carrier for idle mode CA/DC measurement reporting is in FR2.			

In the absence or expiration of T331, it is up to UE implementation to perform the idle mode CA/DC measurement.

For inter-frequency carriers configured for idle mode CA/DC measurements, the UE shall be capable of performing SS-RSRP and SS-RSRQ measurements of the carriers, and the UE physical layer shall be capable of reporting SS-RSRP and SS-RSRQ measurements of the carriers configured for idle mode CA/DC measurements to higher layers, with measurement accuracy as specified in clauses 10.1.4B and 10.1.5B and 10.1.9B and 10.1.10B, respectively.

The UE shall be able to report idle mode CA/DC measurements when idle mode CA/DC measurement reporting is requested by the network.

4.4.2.3 Measurements on serving cell

The UE shall measure the RSRP and RSRQ level of the serving cell and evaluate the cell selection criterion S defined in clause 4.2.2.2 and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements of the serving cell to higher layers, with measurement accuracy as specified in 10.1.2B, 10.1.3B, 10.1.7B and 10.1.8B.

4.4.2.4 Measurements of E-UTRAN inter-RAT DC candidate cells

While T331 is running, the UE shall perform measurement on the configured inter-RAT carriers for idle mode CA/DC measurement reporting according to the UE measurement capability.

A UE which supports *idleInactiveEUTRA-MeasReport-r16* shall support idle mode DC measurements of:

- at least 7 E-UTRAN inter-RAT carriers which are also configured for E-UTRAN inter-RAT mobility measurements, and
- at least 1 E-UTRAN inter-RAT carrier which is not configured for E-UTRAN inter-RAT mobility measurements.

The UE shall be capable of monitoring a total of at least 7 inter-RAT carriers for idle mode CA/DC measurements comprising of carriers configured for inter-RAT mobility measurements and carriers not configured for inter-RAT mobility measurements.

For inter-RAT carriers configured for idle mode CA/DC measurements, if $S_{rxlev} \leq S_{nonIntraSearchP}$ or $S_{qual} \leq S_{nonIntraSearchQ}$ the inter-RAT measurement requirements in clause 4.2.2.5 shall apply, where UE shall search for and measure inter-RAT layers configured for idle mode CA/DC measurements in preparation for possible reporting. If $S_{rxlev} > S_{nonIntraSearchP}$ and $S_{qual} > S_{nonIntraSearchQ}$ the UE shall search for inter-RAT layers configured for idle mode CA/DC measurements at least every $T_{higher_priority_search}$ where $T_{higher_priority_search}$ is described in clause 4.2.2, where UE shall search for and measure inter-RAT layers configured for idle mode CA/DC measurements in preparation for possible reporting.

For overlapping inter-RAT carriers configured for idle mode CA/DC measurements, the UE shall be capable of performing RSRP and RSRQ measurements of the carriers, and the UE physical layer shall be capable of reporting RSRP and RSRQ measurements of the carriers configured for idle mode CA/DC measurements to higher layers, with measurement accuracy as specified in clauses 9.1.3B.2 and 9.1.6B.2 [15], respectively.

The UE shall be able to report idle mode CA measurements when idle mode CA measurement reporting is requested by the network.

5 SA: RRC_INACTIVE state mobility

5.1 Cell Re-selection

5.1.1 Introduction

The cell reselection procedure allows the UE to select a more suitable cell and camp on it.

When the UE is in *Camped Normally* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency, inter-frequency and inter-RAT cells indicated by the serving cell. For intra-frequency and inter-frequency cells the serving cell may provide explicit neighbour list, or only carrier frequency information and bandwidth information. UE measurement activity is also controlled by measurement rules defined in TS38.304 [1], allowing the UE to limit its measurement activity.

5.1.2 Requirements

5.1.2.1 UE measurement capability

The requirements in clause 4.2.2.1 shall apply.

5.1.2.2 Measurement and evaluation of serving cell

The requirements in this clause apply when UE is configured with eDRX_IDLE, otherwise the requirements in clause 4.2.2.2 shall apply.

When UE is configured with eDRX_IDLE, the UE shall measure the SS-RSRP and SS-RSRQ level of the serving cell and evaluate the cell selection criterion S defined in TS 38.304 [1] for the serving cell at least once every $M1 \cdot T$ for FR1 and $N1 \cdot T$ for FR2; where:

- T is determined according to clause 7.1 in [1],
- $M1=2$ if SMTC periodicity (T_{SMTC}) > 20 ms and $T \leq 0.64$ second, otherwise $M1=1$.

The UE shall filter the SS-RSRP and SS-RSRQ measurements of the serving cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by, at least $T/2$.

If the UE has evaluated according to Table 5.1.2.2-1 or and Table 5.1.2.2-2 in N_{serv} consecutive T cycles that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities.

Table 5.1.2.2-1: N_{serv} for UE configured with eDRX_IDLE cycle, (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length[s]	T [s]	Nserv [number of T]
2.56 ≤eDRX_IDLE cycle length ≤10485.76	0.32 ≤DRX_Inactive cycle length ≤2.56; or 2.56 ≤eDRX_Inactive cycle length ≤10.24 if inactive eDRX is configured	0.32	4*M1
		0.64	4*M1
		1.28	2
		2.56	2
		5.12	2
		10.24	2
Note1: T is dertermined according to clause 7.1 in [1].			

Table 5.1.2.2-2: N_{serv} for UE configured with eDRX_IDLE cycle, (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length[s]	T [s]	Scaling Factor (N1)	N_{serv} [number of T]
		0.32	8	$4 \cdot N1$

2.56 ≤eDRX_IDLE cycle length ≤10485.76	0.32 ≤DRX_Inactive cycle length ≤2.56; or 2.56 ≤eDRX_Inactive cycle length ≤10.24 if inactive eDRX is configured	0.64	5	4* N1
		1.28	4	2* N1
		2.56	3	2* N1
		5.12	3	2* N1
		10.24	3	2* N1
Note1: T is dertermined according to clause 7.1 in [1].				

When UE transitions from measurements within PTW to measurements outside PTW or vice versa during one measurement period, the UE measurement requirements apply based on the longer measurement period requirements before or after the transition.

If the UE in RRC_INACTIVE has not found any new suitable cell based on searches and measurements using the intra-frequency, inter-frequency and inter-RAT information indicated in the system information during the time T', the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 [1], where:

- T' = 10 s, if the UE is not configured with eDRX_inactive cycle, or
- T' = MAX (10 s, one eDRX_INACTIVE cycle) if the UE is configured with eDRX_INACTIVE cycle for FR1, or
- T' = MAX (10 s, N1* eDRX_INACTIVE cycle) if the UE is configured with eDRX_INACTIVE cycle for FR2.

5.1.2.3 Measurements of intra-frequency NR cells

The requirements in this clause apply when UE is configured with eDRX_IDLE, otherwise the requirements in clause 4.2.2.3 shall apply. The requirements in clause 4.2.2.9 apply for UE configured with relaxed measurement criterion when UE is not configured with eDRX_IDLE.

When UE is configured with eDRX_IDLE, the requirements defined in section 4.2.2.3 shall apply with $T_{\text{detect,NR_Intra}}$, $T_{\text{measure,NR_Intra}}$ and $T_{\text{evaluate,NR_Intra}}$ defined in Table 5.1.2.3-1 and Table 5.1.2.3-2.

Table 5.1.2.3-1: T_{detect} , T_{meas} and T_{evaluate} for UE configured with eDRX_IDLE cycle, (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	$T_{\text{detect,NR_Intra}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure,NR_Intra}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate,NR_Intra}}$ [s] (number of DRX or INACTIVE eDRX cycles)
2.56 $\leq \text{eDRX_IDLE}$ cycle length $\leq$ 10485.76	0.32	11.52 x M2 (36 x M2)	1.28 x M2 (4 x M2)	5.12 x M2 (16 x M2)
	0.64	17.92 (28)	1.28 (2)	5.12 (8)
	1.28	32 (25)	1.28 (1)	6.4 (5)
	2.56	58.88 (23)	2.56 (1)	7.68 (3)
	5.12	117.76 (23)	5.12 (1)	15.36 (3)
	10.24	235.52 (23)	10.24 (1)	30.72 (3)
Note1: M2 = 1.5 if SMTTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.				

Table 5.1.2.3-2: T_{detect} , T_{meas} and T_{evaluate} for UE configured with eDRX_IDLE cycle, (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	Scaling Factor (N1)	$T_{\text{detect,NR_Intra}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure,NR_Intra}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate,NR_Intra}}$ [s] (number of DRX or eDRX INACTIVE cycles)
2.56 $\leq \text{eDRX_IDLE}$	0.32	8	11.52 x N1 x M2 (36 x N1 x M2)	1.28 x N1 x M2 (4 x N1 x M2)	5.12 x N1 x M2 (16 x N1 x M2)

cycle length $\leq$ 10485.76	0.64	5	$17.92 \times N1$ (28 x N1)	$1.28 \times N1$ (2 x N1)	$5.12 \times N1$ (8 x N1)
	1.28	4	$32 \times N1$ (25 x N1)	$1.28 \times N1$ (1 x N1)	$6.4 \times N1$ (5 x N1)
	2.56	3	$58.88 \times N1$ (23 x N1)	$2.56 \times N1$ (1 x N1)	$7.68 \times N1$ (3 x N1)
	5.12	3	$117.76 \times N1$ (23 x N1)	$5.12 \times N1$ (1 x N1)	$15.36 \times N1$ (3 x N1)
	10.24	3	$235.52 \times N1$ (23 x N1)	$10.24 \times N1$ (1 x N1)	$30.72 \times N1$ (3 x N1)
Note1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.					

5.1.2.4 Measurements of inter-frequency NR cells

The requirements in this clause apply when UE is configured with eDRX_IDLE, otherwise the requirements in clause 4.2.2.4 shall apply.

When UE is configured with eDRX_IDLE, the requirements defined in section 4.2.2.4 shall apply with $T_{\text{detect,NR_Inter}}$, $T_{\text{measure,NR_Inter}}$ and $T_{\text{evaluate,NR_Inter}}$ defined in Table 5.1.2.4-1 and Table 5.1.2.4-2, and with K_{carrier} defined as follows.

Table 5.1.2.4-1: T_{detect} , T_{meas} and T_{evaluate} for UE configured with eDRX_IDLE cycle, (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	$T_{\text{detect,NR_Inter}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure,NR_Inter}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate,NR_Inter}}$ [s] (number of DRX or eDRX INACTIVE cycles)
$2.56 \leq \text{eDRX_IDLE cycle length} \leq 10485.76$	0.32	11.52×1.5 (36 x 1.5)	1.28×1.5 (4 x 1.5)	5.12×1.5 (16 x 1.5)
	0.64	17.92 (28)	1.28 (2)	5.12 (8)
	1.28	32 (25)	1.28 (1)	6.4 (5)
	2.56	58.88 (23)	2.56 (1)	7.68 (3)
	5.12	117.76 (23)	5.12 (1)	15.36 (3)
	10.24	235.52 (23)	10.24 (1)	30.72 (3)

Table 5.1.2.4-2: T_{detect} , T_{meas} and T_{evaluate} for UE configured with eDRX_IDLE cycle, (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	Scaling Factor (N1)	$T_{\text{detect,NR_Inter}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure,NR_Inter}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate,NR_Inter}}$ [s] (number of DRX or eDRX INACTIVE cycles)
$2.56 \leq \text{eDRX_IDLE cycle length} \leq 10485.76$	0.32	8	$11.52 \times N1 \times 1.5$ (36 x N1 x 1.5)	$1.28 \times N1 \times 1.5$ (4 x N1 x 1.5)	$5.12 \times N1 \times 1.5$ (16 x N1 x 1.5)
	0.64	5	$17.92 \times N1$ (28 x N1)	$1.28 \times N1$ (2 x N1)	$5.12 \times N1$ (8 x N1)
	1.28	4	$32 \times N1$ (25 x N1)	$1.28 \times N1$ (1 x N1)	$6.4 \times N1$ (5 x N1)
	2.56	3	$58.88 \times N1$ (23 x N1)	$2.56 \times N1$ (1 x N1)	$7.68 \times N1$ (3 x N1)
	5.12	3	$117.76 \times N1$ (23 x N1)	$5.12 \times N1$ (1 x N1)	$15.36 \times N1$ (3 x N1)
	10.24	3	$235.52 \times N1$ (23 x N1)	$10.24 \times N1$ (1 x N1)	$30.72 \times N1$ (3 x N1)

If UE is not configured to perform PRS measurement, or if UE is configured to perform PRS measurement and supports *parallelPRS-MeasRRC-Inactive-r17*, K_{carrier} in clause 4.2.2.4 shall apply regardless of whether the serving cell is subject to CCA or not.

If UE is configured to perform PRS measurement but does not support *parallelPRS-MeasRRC-Inactive-r17*, K_{carrier} is replaced with $K_{\text{carrier}} + 1$, regardless of whether the serving cell is subject to CCA or not.

If UE is not configured to perform PRS measurement, or if UE is configured to perform PRS measurement and supports *parallelPRS-MeasRRC-Inactive-r17*, the requirements in clause 4.2.2.10 shall apply regardless of whether the serving cell is subject to CCA or not for UE configured with relaxed measurement criterion.

If UE is configured to perform PRS measurement but does not support *parallelPRS-MeasRRC-Inactive-r17*, the requirements in clause 4.2.2.10 shall apply with K_{carrier} being replaced with $K_{\text{carrier}} + 1$, regardless of whether the serving cell is subject to CCA or not for UE configured with relaxed measurement criterion.

5.1.2.5 Measurements of inter-RAT E-UTRAN cells

The requirements in this clause apply when UE is configured with eDRX_IDLE, otherwise the requirements clause 4.2.2.5 shall apply. The requirements in clause 4.2.2.11 shall apply for UE configured with relaxed measurement criterion when UE is not configured with eDRX_IDLE.

When UE is configured with eDRX_IDLE, the requirements defined in section 4.2.2.5 shall apply with $T_{\text{detect, EUTRAN}}$, $T_{\text{measure, EUTRAN}}$ and $T_{\text{evaluate, EUTRAN}}$ defined in Table 5.1.2.5-1.

Table 5.1.2.5-1: $T_{\text{detect, EUTRAN}}$, $T_{\text{measure, EUTRAN}}$ and $T_{\text{evaluate, EUTRAN}}$ for inactive UE configured with eDRX_IDLE cycle, (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	$T_{\text{detect, EUTRAN}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure, EUTRAN}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate, EUTRAN}}$ [s] (number of DRX or eDRX INACTIVE cycles)
2.56 $\leq \text{eDRX_IDLE cycle length} \leq 10485.76$	0.32	11.52 x 1.5 (36 x 1.5)	1.28 x 1.5 (4 x 1.5)	5.12 x 1.5 (16 x 1.5)
	0.64	17.92 (28)	1.28 (2)	5.12 (8)
	1.28	32 (25)	1.28 (1)	6.4 (5)
	2.56	58.88 (23)	2.56 (1)	7.68 (3)
	5.12	117.76 (23)	5.12 (1)	15.36 (3)
	10.24	235.52(23)	10.24 (1)	30.72 (3)

5.1.2.6 Maximum interruption in paging reception

The requirements in clause 4.2.2.6 shall apply.

5.1.2.7 General requirements

When configured with eDRX_INACTIVE, the UE shall search every layer of higher priority at least every $T_{\text{higher_priority_search}}$, where $T_{\text{higher_priority_search}}$ is defined as follows:

- $T_{\text{higher_priority_search}} = \max(60, 15 \cdot \text{eDRX_INACTIVE cycle length}) \cdot N_{\text{layers}}$ seconds if eDRX_INACTIVE cycle ≤ 10.24 s,

Otherwise, if the UE is not configured with eDRX_INACTIVE cycle, the UE shall search every layer of higher priority at least every $T_{\text{higher_priority_search}} = (60 \cdot N_{\text{layers}})$ seconds.

N_{layers} is the total number of higher priority NR and E-UTRA carrier frequencies broadcasted in system information. For a UE configured with early measurement reporting, while T331 is running, N_{layers} is the combined total number of higher priority NR and E-UTRA carrier frequencies broadcasted in system information and carriers configured for idle mode CA measurements.

Note: combined total number means that if a carrier is a high priority carrier and additionally a carrier configured for idle mode CA measurements, it only counts as one carrier.

If UE is not configured to perform PRS measurement, or if UE is configured to perform PRS measurement and supports *parallelPRS-MeasRRC-Inactive-r17*, the requirements in this clause shall apply.

If UE is configured to perform PRS measurement but does not support *parallelPRS-MeasRRC-Inactive-r17*, the requirements in this clause shall apply with N_{layers} being replaced with $N_{layers} + 1$.

5.1.2.8 Minimum requirement at transitions

The requirements in sub-clause 4.2.2.8 shall apply.

5.1.2.9 Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion

The requirements in clause 4.2.2.9 apply for UE configured with relaxed measurement criterion except when UE is configured with eDRX_IDLE cycle greater than 10.24 s and UE has fulfilled low mobility criterion or not-at-cell edge criterion.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, and UE has fulfilled low mobility criterion or not-at-cell edge criterion, then the requirements in Table 5.1.2.9-1 and Table 5.1.2.9-2 respectively apply provided that eDRX cycle is $\leq [10485.76]$ sec.

Table 5.1.2.9-1: $T_{\text{detect,NR_Intra_Relax}}$, $T_{\text{measure,NR_Intra_Relax}}$ and $T_{\text{evaluate,NR_Intra_Relax}}$ for inactive UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	$T_{\text{detect,NR_Intra_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure,NR_Intra_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate,NR_Intra_Relax}}$ [s] (number of DRX or INACTIVE eDRX cycles)
20.48 $\leq$ eDRX_IDLE cycle length ≤ 10485.76	0.32	$11.52 \times M2 \times K1$ (36 x $M2 \times K1$)	$1.28 \times M2 \times K1$ (4 x $M2 \times K1$)	$5.12 \times M2 \times K1$ (16 x $M2 \times K1$)
	0.64	$17.92 \times K1$ (28 x $K1$)	$1.28 \times K1$ (2 x $K1$)	$5.12 \times K1$ (8 x $K1$)
	1.28	$32 \times K1$ (25 x $K1$)	$1.28 \times K1$ (1 x $K1$)	$6.4 \times K1$ (5 x $K1$)
	2.56	$58.88 \times K1$ (23 x $K1$)	$2.56 \times K1$ (1 x $K1$)	$7.68 \times K1$ (3 x $K1$)
	5.12	$117.76 \times K1$ (23 x $K1$)	$5.12 \times K1$ (1 x $K1$)	$15.36 \times K1$ (3 x $K1$)
	10.24	$235.52 \times K1$ (23)	$10.24 \times K1$ (1 x $K1$)	$30.72 \times K1$ (3 x $K1$)
Note 1: $M2 = 1.5$ if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise $M2=1$. Note 2: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion or fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.				

Table 5.1.2.9-2: $T_{\text{detect,NR_Intra_Relax}}$, $T_{\text{measure,NR_Intra_Relax}}$ and $T_{\text{evaluate,NR_Intra_Relax}}$ for inactive UE configured with eDRX_IDLE cycle, (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	Scaling Factor (N1)	$T_{\text{detect,NR_Intra_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure,NR_Intra_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate,NR_Intra_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)
20.48 $\leq$ eDRX_IDLE cycle length ≤ 10485.76	0.32	8	$11.52 \times N1 \times M2 \times K1$ (36 x $N1 \times M2 \times K1$)	$1.28 \times N1 \times M2 \times K1$ (4 x $N1 \times M2 \times K1$)	$5.12 \times N1 \times M2 \times K1$ (16 x $N1 \times M2 \times K1$)
	0.64	5	$17.92 \times N1 \times K1$ (28 x $N1 \times K1$)	$1.28 \times N1 \times K1$ (2 x $N1 \times K1$)	$5.12 \times N1 \times K1$ (8 x $N1 \times K1$)
	1.28	4	$32 \times N1 \times K1$ (25 x $N1 \times K1$)	$1.28 \times N1 \times K1$ (1 x $N1 \times K1$)	$6.4 \times N1 \times K1$ (5 x $N1 \times K1$)
	2.56	3	$58.88 \times N1 \times K1$ (23 x $N1 \times K1$)	$2.56 \times N1 \times K1$ (1 x $N1 \times K1$)	$7.68 \times N1 \times K1$ (3 x $N1 \times K1$)
	5.12	3	$117.76 \times N1 \times K1$ (23 x $N1 \times K1$)	$5.12 \times N1 \times K1$ (1 x $N1 \times K1$)	$15.36 \times N1 \times K1$ (3 x $N1 \times K1$)

	10.24	3	$235.52 \times N1 \times K1$ ($23 \times N1 \times K1$)	$10.24 \times N1 \times K1$ (1 x $N1 \times K1$)	$30.72 \times N1 \times K1$ (3 x $N1 \times K1$)
Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion or fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.					

5.1.2.10 Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion

The requirements in clause 4.2.2.10 apply for UE configured with relaxed measurement criterion except when UE is configured with eDRX_IDLE cycle greater than 10.24 s and UE has fulfilled or low mobility criterion or not-at-cell edge criterion.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, and UE has fulfilled low mobility criterion or not-at-cell edge criterion, then the requirements in Table 5.1.2.10-1 and Table 5.1.2.10-2 respectively apply provided that eDRX cycle is $\leq [10485.76]$ sec.

Table 5.1.2.10-1: $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$ for inactive UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	$T_{\text{detect,NR_Inter_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure,NR_Inter_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate,NR_Inter_Relax}}$ [s] (number of DRX or INACTIVE eDRX cycles)
20.48 $\leq$ eDRX_IDLE cycle length ≤ 10485.76	0.32	$11.52 \times M2 \times K1$ (36 x $M2 \times K1$)	$1.28 \times M2 \times K1$ (4 x $M2 \times K1$)	$5.12 \times M2 \times K1$ (16 x $M2 \times K1$)
	0.64	$17.92 \times K1$ (28 x $K1$)	$1.28 \times K1$ (2 x $K1$)	$5.12 \times K1$ (8 x $K1$)
	1.28	$32 \times K1$ (25 x $K1$)	$1.28 \times K1$ (1 x $K1$)	$6.4 \times K1$ (5 x $K1$)
	2.56	$58.88 \times K1$ (23 x $K1$)	$2.56 \times K1$ (1 x $K1$)	$7.68 \times K1$ (3 x $K1$)
	5.12	$117.76 \times K1$ (23 x $K1$)	$5.12 \times K1$ (1 x $K1$)	$15.36 \times K1$ (3 x $K1$)
	10.24	$235.52 \times K1$ (23)	$10.24 \times K1$ (1 x $K1$)	$30.72 \times K1$ (3 x $K1$)
Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion or fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.				

Table 5.1.2.10-2: $T_{\text{detect,NR_Inter_Relax}}$, $T_{\text{measure,NR_Inter_Relax}}$ and $T_{\text{evaluate,NR_Inter_Relax}}$ for inactive UE configured with eDRX_IDLE cycle, (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	Scaling Factor (N1)	$T_{\text{detect,NR_Inter_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure,NR_Inter_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate,NR_Inter_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)
20.48 $\leq$ eDRX_IDLE cycle length ≤ 10485.76	0.32	8	$11.52 \times N1 \times M2 \times K1$ (36 x $N1 \times M2 \times K1$)	$1.28 \times N1 \times M2 \times K1$ (4 x $N1 \times M2 \times K1$)	$5.12 \times N1 \times M2 \times K1$ (16 x $N1 \times M2 \times K1$)
	0.64	5	$17.92 \times N1 \times K1$ (28 x $N1 \times K1$)	$1.28 \times N1 \times K1$ (2 x $N1 \times K1$)	$5.12 \times N1 \times K1$ (8 x $N1 \times K1$)
	1.28	4	$32 \times N1 \times K1$ (25 x $N1 \times K1$)	$1.28 \times N1 \times K1$ (1 x $N1 \times K1$)	$6.4 \times N1 \times K1$ (5 x $N1 \times K1$)
	2.56	3	$58.88 \times N1 \times K1$ (23 x $N1 \times K1$)	$2.56 \times N1 \times K1$ (1 x $N1 \times K1$)	$7.68 \times N1 \times K1$ (3 x $N1 \times K1$)
	5.12	3	$117.76 \times N1 \times K1$ (23 x $N1 \times K1$)	$5.12 \times N1 \times K1$ (1 x $N1 \times K1$)	$15.36 \times N1 \times K1$ (3 x $N1 \times K1$)
	10.24	3	$235.52 \times N1 \times K1$ (23 x $N1 \times K1$)	$10.24 \times N1 \times K1$ (1 x $N1 \times K1$)	$30.72 \times N1 \times K1$ (3 x $N1 \times K1$)
Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 2: K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion or fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.					

5.1.2.11 Measurements of inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion

The requirements in clause 4.2.2.11 apply for UE configured with relaxed measurement criterion except when UE is configured with eDRX_IDLE cycle greater than 10.24 s and UE has fulfilled low mobility criterion or not-at-cell edge criterion.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, and UE has fulfilled low mobility criterion or not-at-cell edge criterion, then the requirements in Table 5.1.2.11-1 apply provided that eDRX cycle is $\leq [10485.76]$ sec.

Table 5.1.2.11-1: $T_{\text{detect, EUTRAN_Relax}}$, $T_{\text{measure, EUTRAN_Relax}}$ and $T_{\text{evaluate, EUTRAN_Relax}}$ for inactive UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	$T_{\text{detect, EUTRAN_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure, EUTRAN_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate, EUTRAN_Relax}}$ [s] (number of DRX or INACTIVE eDRX cycles)
$\leq \text{eDRX_IDLE cycle length} \leq 10485.76$	0.32	$11.52 \times M2 \times K1$ ($36 \times M2 \times K1$)	$1.28 \times M2 \times K1$ (4 $\times M2 \times K1$)	$5.12 \times M2 \times K1$ (16 $\times M2 \times K1$)
	0.64	$17.92 \times K1$ (28 $\times$ $K1$)	$1.28 \times K1$ (2 $\times$ $K1$)	$5.12 \times K1$ (8 $\times$ $K1$)
	1.28	$32 \times K1$ (25 $\times$ $K1$)	$1.28 \times K1$ (1 $\times$ $K1$)	$6.4 \times K1$ (5 $\times$ $K1$)
	2.56	$58.88 \times K1$ (23 $\times$ $K1$)	$2.56 \times K1$ (1 $\times$ $K1$)	$7.68 \times K1$ (3 $\times$ $K1$)
	5.12	$117.76 \times K1$ (23 $\times K1$)	$5.12 \times K1$ (1 $\times$ $K1$)	$15.36 \times K1$ (3 $\times$ $K1$)
	10.24	$235.52 \times K1$ (23 $\times K1$)	$10.24 \times K1$ (1 $\times$ $K1$)	$30.72 \times K1$ (3 $\times$ $K1$)
Note 1: $M2 = 1.5$ if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise $M2=1$. Note 2: $K1 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion or fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.				

5.1A Cell Re-selection with CCA

5.1A.1 Introduction

The cell reselection procedure allows the UE to select a more suitable cell and camp on it. The requirements in subclauses 5.1A.2.3, 5.1A.2.4, and 5.1A.2.6 apply when at least the target cell is on a carrier frequency with CCA, and the requirements in subclauses 5.1A.2.2 and 5.1A.2.5 apply when at least the camping cell is on a carrier frequency with CCA.

When the UE is in *Camped Normally* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency, inter-frequency and inter-RAT cells indicated by the serving cell. For intra-frequency and inter-frequency cells the serving cell may provide explicit neighbour list, or only carrier frequency information and bandwidth information. UE measurement activity is also controlled by measurement rules defined in TS38.304, allowing the UE to limit its measurement activity.

5.1A.2 Requirements

5.1A.2.1 UE measurement capability

The requirements in clause 4.2A.2.1 shall apply.

5.1A.2.2 Measurement and evaluation when CCA is used on the serving cell

The requirements in clause 4.2A.2.2 shall apply.

5.1A.2.3 Measurements of intra-frequency NR cells when CCA is used on the serving cell and target cell

The requirements in clause 4.2A.2.3 shall apply.

5.1A.2.4 Measurements of inter-frequency NR cells when CCA is used on the target cell

The requirements in clause 4.2A.2.4 shall apply.

5.1A.2.5 Measurements of inter-RAT E-UTRAN cells when CCA is used on the serving cell

The requirements in clause 4.2.2.5 shall apply.

5.1A.2.6 Maximum interruption in paging reception when CCA is used on the target cell

The requirements in clause 4.2A.2.6 shall apply.

5.1A.2.7 General requirements

The requirements in clause 4.2.2.7 shall apply.

5.1B Cell Re-selection for RedCap

5.1B.1 Introduction

The cell reselection procedure allows the RedCapUE to select a more suitable cell and camp on it.

The requirements in subclause 5.1B.2 apply to 1 Rx RedCap UE and 2 Rx Redcap UE.

When the UE is in *Camped Normally* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency, inter-frequency and inter-RAT cells indicated by the serving cell. For intra-frequency and inter-frequency cells the serving cell may provide explicit neighbour list, or only carrier frequency information and bandwidth information. UE measurement activity is also controlled by measurement rules defined in TS38.304, allowing the UE to limit its measurement activity.

5.1B.2 Requirements

5.1B.2.1 UE measurement capability

The requirements in clause 4.2B.2.1 shall apply.

5.1B.2.2 Measurement and evaluation of serving cell

The requirements in clause 4.2B.2.2 shall apply when UE is not configured with eDRX_IDLE.

When UE is configured with eDRX_IDLE, the UE shall measure the SS-RSRP and SS-RSRQ level of the serving cell and evaluate the cell selection criterion S defined in TS 38.304 [1] for the serving cell at least once every $M1 \cdot T$ for FR1 and $N1 \cdot T$ for FR2; where:

- T is determined according to clause 7.1 in [1],
- $M1=2$ if SMTC periodicity (T_{SMTC}) > 20 ms and $T \leq 0.64$ second, otherwise $M1=1$.

The UE shall filter the SS-RSRP and SS-RSRQ measurements of the serving cell using at least 2 measurements. Within the set of measurements used for the filtering, at least two measurements shall be spaced by, at least $T/2$.

If the UE has evaluated according to Table 5.1B.2.2-1or and Table 5.1B.2.2-2 in N_{serv_RedCap} consecutive T that the serving cell does not fulfil the cell selection criterion S, the UE shall initiate the measurements of all neighbour cells indicated by the serving cell, regardless of the measurement rules currently limiting UE measurement activities.

Table 5.1B.2.2-1: N_{serv_RedCap} for inactive Redcap UE configured with eDRX_IDLE cycle, (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length[s]	T [s]	N _{serv} _RedCap [number of T]
2.56 ≤eDRX_IDLE cycle length ≤10485.76	0.32 ≤DRX_Inactive cycle length ≤2.56; or 2.56 ≤eDRX_Inactive cycle length ≤10.24 if inactive eDRX is configured	0.32	4*M1
		0.64	4*M1
		1.28	2
		2.56	2
		5.12	2
		10.24	2
Note1: T is dertermined according to clause 7.1 in [1]. Note2: M1=2 if SMTC periodicity (T _{SMTC}) > 20 ms and T≤ 0.64 second, otherwise M1=1.			

Table 5.1B.2.2-2: N_{serv_RedCap} for inactive Redcap UE configured with eDRX_IDLE cycle, (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length[s]	T [s]	Scaling Factor (N1)	Nserv_RedCap [number of T]
2.56 ≤eDRX_IDLE cycle length ≤10485.76	0.32 ≤DRX_Inactive cycle length ≤2.56; or 2.56 ≤eDRX_Inactive cycle length ≤10.24 if inactive eDRX is configured	0.32	8	4* N1
		0.64	5	4* N1
		1.28	4	2* N1
		2.56	3	2* N1
		5.12	3	2* N1
		10.24	3	2* N1
Note1: T is dertermined according to clause 7.1 in [1].				

When UE transitions from measurements within PTW and to measurements outside PTW or vice versa during one measurement period, the UE measurement requirements apply based on the longer measurement period requirements before or after the transition.

If the UE in RRC_INACTIVE has not found any new suitable cell based on searches and measurements using the intra-frequency, inter-frequency and inter-RAT information indicated in the system information during the time T', the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 [1], where

- $T' = 10$ s, if the UE is not configured with eDRX_inactive cycle, or
- $T' = \text{MAX}(10 \text{ s, one eDRX_inactive cycle})$ if the UE is configured with eDRX_inactive cycle for FR1, or
- $T' = \text{MAX}(10 \text{ s, } N1 \cdot eDRX_inactive \text{ cycle})$ if the UE is configured with eDRX_inactive cycle for FR2.

5.1B.2.3 Measurements of intra-frequency NR cells

The requirements in clause 4.2B.2.3 shall apply when UE is not configured with eDRX_IDLE. When UE is configured with eDRX_IDLE, the requirements defined in section 4.2B.2.3 shall apply with $T_{detect,NR_Intra_RedCap}$, $T_{measure,NR_Intra_RedCap}$ and $T_{evaluate,NR_Intra_RedCap}$ defined in Table 5.1B.2.3-1 and Table 5.1B.2.3-2.

Table 5.1B.2.3-1: T_{detect} , T_{meas} and $T_{evaluate}$ for inactive Redcap UE configured with eDRX_IDLE cycle, (Frequency range FR1)

--	--	--	--	--

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	$T_{\text{detect,NR_Intra_RedCap}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure,NR_Intra_RedCap}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate,NR_Intra_RedCap}}$ [s] (number of DRX or INACTIVE eDRX cycles)
2.56 $\leq$ eDRX_IDLE cycle length $\leq$ 10485.76	0.32	$11.52 \times M2$ (36 x M2)	$1.28 \times M2$ (4 x M2)	$5.12 \times M2$ (16 x M2)
	0.64	17.92 (28)	1.28 (2)	5.12 (8)
	1.28	32 (25)	1.28 (1)	6.4 (5)
	2.56	58.88 (23)	2.56 (1)	7.68 (3)
	5.12	117.76 (23)	5.12 (1)	15.36 (3)
	10.24	235.52 (23)	10.24 (1)	30.72 (3)
Note1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.				

Table 5.1B.2.3-2: T_{detect} , T_{meas} and T_{evaluate} for inactive Redcap UE configured with eDRX_IDLE cycle, (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	Scaling Factor (N1)	$T_{\text{detect,NR_Intra_RedCap}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure,NR_Intra_RedCap}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate,NR_Intra_RedCap}}$ [s] (number of DRX or eDRX INACTIVE cycles)
2.56 $\leq$ eDRX_IDLE cycle length $\leq$ 10485.76	0.32	8	$11.52 \times N1 \times M2$ (36 x N1 x M2)	$1.28 \times N1 \times M2$ (4 x N1 x M2)	$5.12 \times N1 \times M2$ (16 x N1 x M2)
	0.64	5	$17.92 \times N1$ (28 x N1)	$1.28 \times N1$ (2 x N1)	$5.12 \times N1$ (8 x N1)
	1.28	4	$32 \times N1$ (25 x N1)	$1.28 \times N1$ (1 x N1)	$6.4 \times N1$ (5 x N1)
	2.56	3	$58.88 \times N1$ (23 x N1)	$2.56 \times N1$ (1 x N1)	$7.68 \times N1$ (3 x N1)
	5.12	3	$117.76 \times N1$ (23 x N1)	$5.12 \times N1$ (1 x N1)	$15.36 \times N1$ (3 x N1)
	10.24	3	$235.52 \times N1$ (23 x N1)	$10.24 \times N1$ (1 x N1)	$30.72 \times N1$ (3 x N1)
Note1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1.					

5.1B.2.4 Measurements of inter-frequency NR cells

The requirements in clause 4.2B.2.4 shall apply when UE is not configured with eDRX_IDLE. When UE is configured with eDRX_IDLE, the requirements defined in section 4.2B.2.4 shall apply with $T_{\text{detect,NR_Inter_RedCap}}$, $T_{\text{measure,NR_Inter_RedCap}}$ and $T_{\text{evaluate,NR_Inter_RedCap}}$ defined in Table 5.1B.2.4-1 and Table 5.1B.2.4-2.

Table 5.1B.2.4-1: T_{detect} , T_{meas} and T_{evaluate} for inactive Redcap UE configured with eDRX_IDLE cycle, (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	$T_{\text{detect,NR_Inter_RedCap}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure,NR_Inter_RedCap}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate,NR_Inter_RedCap}}$ [s] (number of DRX or eDRX INACTIVE cycles)
2.56 $\leq$ eDRX_IDLE cycle length $\leq$ 10485.76	0.32	11.52×1.5 (36 x 1.5)	1.28×1.5 (4 x 1.5)	5.12×1.5 (16 x 1.5)
	0.64	17.92 (28)	1.28 (2)	5.12 (8)
	1.28	32 (25)	1.28 (1)	6.4 (5)
	2.56	58.88 (23)	2.56 (1)	7.68 (3)
	5.12	117.76 (23)	5.12 (1)	15.36 (3)
	10.24	235.52(23)	10.24 (1)	30.72 (3)

Table 5.1B.2.4-2: T_{detect} , T_{meas} and T_{evaluate} for inactive Redcap UE configured with eDRX_IDLE cycle, (Frequency range FR2)

--	--	--	--	--	--

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	Scaling Factor (N1)	$T_{\text{detect,NR_Inter_RedCap}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure,NR_Inter_RedCap}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate,NR_Inter_RedCap}}$ [s] (number of DRX or eDRX INACTIVE cycles)
2.56 $\leq eDRX_IDLE$ cycle length $\leq$ 10485.76	0.32	8	$11.52 \times N1 \times 1.5$ ($36 \times N1 \times 1.5$)	$1.28 \times N1 \times 1.5$ (4 x $N1 \times 1.5$)	$5.12 \times N1 \times 1.5$ (16 $\times N1 \times 1.5$)
	0.64	5	$17.92 \times N1$ (28 x $N1$)	$1.28 \times N1$ (2 x $N1$)	$5.12 \times N1$ (8 x $N1$)
	1.28	4	$32 \times N1$ (25 x $N1$)	$1.28 \times N1$ (1 x $N1$)	$6.4 \times N1$ (5 x $N1$)
	2.56	3	$58.88 \times N1$ (23 x $N1$)	$2.56 \times N1$ (1 x $N1$)	$7.68 \times N1$ (3 x $N1$)
	5.12	3	$117.76 \times N1$ (23 x $N1$)	$5.12 \times N1$ (1 x $N1$)	$15.36 \times N1$ (3 x $N1$)
	10.24	3	$235.52 \times N1$ (23 x $N1$)	$10.24 \times N1$ (1 x $N1$)	$30.72 \times N1$ (3 x $N1$)

5.1B.2.5 Measurements of inter-RAT E-UTRAN cells

The requirements in clause 4.2B.2.5 shall apply when UE is not configured with eDRX_IDLE. When UE is configured with eDRX_IDLE, the requirements defined in section 4.2B.2.5 shall apply with $T_{\text{detect, EUTRAN_RedCap}}$, $T_{\text{measure, EUTRAN_RedCap}}$ and $T_{\text{evaluate, EUTRAN_RedCap}}$ defined in Table 5.1B.2.5-1.

Table 5.1B.2.5-1: $T_{\text{detect, EUTRAN_RedCap}}$, $T_{\text{measure, EUTRAN_RedCap}}$ and $T_{\text{evaluate, EUTRAN_RedCap}}$ for inactive Redcap UE configured with eDRX_IDLE cycle, (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	$T_{\text{detect, EUTRAN_RedCap}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure, EUTRAN_RedCap}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate, EUTRAN_RedCap}}$ [s] (number of DRX or eDRX INACTIVE cycles)
2.56 $\leq eDRX_IDLE$ cycle length $\leq$ 10485.76	0.32	11.52×1.5 (36 x 1.5)	1.28×1.5 (4 x 1.5)	5.12×1.5 (16 x 1.5)
	0.64	17.92 (28)	1.28 (2)	5.12 (8)
	1.28	32 (25)	1.28 (1)	6.4 (5)
	2.56	58.88 (23)	2.56 (1)	7.68 (3)
	5.12	117.76 (23)	5.12 (1)	15.36 (3)
	10.24	235.52(23)	10.24 (1)	30.72 (3)

5.1B.2.6 Maximum interruption in paging reception

The requirements in clause 4.2B.2.6 shall apply for RedCap UEs.

For RedCap UE in HD-FDD mode, if paging occasions partially overlap with CG-SDT transmission, the UE is only required to monitor for SI change indication in any paging occasion at least once per modification period [2] during SDT if the initial downlink BWP on which the SDT procedure is ongoing is associated with a CD-SSB.

5.1B.2.7 General requirements

The requirements in sub-clause 5.1.2.7 shall apply.

5.1B.2.8 Minimum requirement at transitions

The requirements in sub-clause 4.2B.2.8 shall apply.

5.1B.2.9 Measurements of intra-frequency NR cells for UE configured with relaxed measurement criterion

The requirements in clause 4.2B.2.9 apply for UE configured with relaxed measurement criterion except when UE is configured with eDRX_IDLE cycle greater than 10.24 s and UE has fulfilled stationary criterion or low mobility criterion or not-at-cell edge criterion.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, and UE has fulfilled stationary criterion or low mobility criterion or not-at-cell edge criterion, then the requirements in Table 5.1B.2.9-1 and Table 5.1B.2.9-2 respectively apply provided that eDRX cycle is ≤ 10485.76 sec.

Table 5.1B.2.9-1: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for inactive Redcap UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	$T_{\text{detect,NR_Intra_RedCap_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure,NR_Intra_RedCap_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ [s] (number of DRX or INACTIVE eDRX cycles)
20.48 $\leq$ eDRX_IDLE cycle length ≤ 10485.76	0.32	$11.52 \times M2 \times K4$ (36 x M2 x K4)	$1.28 \times M2 \times K4$ (4 x M2 x K4)	$5.12 \times M2 \times K4$ (16 x M2 x K4)
	0.64	$17.92 \times K4$ (28 x K4)	$1.28 \times K4$ (2 x K4)	$5.12 \times K4$ (8 x K4)
	1.28	$32 \times K4$ (25 x K4)	$1.28 \times K4$ (1 x K4)	$6.4 \times K4$ (5 x K4)
	2.56	$58.88 \times K4$ (23 x K4)	$2.56 \times K4$ (1 x K4)	$7.68 \times K4$ (3 x K4)
	5.12	$117.76 \times K4$ (23 x K4)	$5.12 \times K4$ (1 x K4)	$15.36 \times K4$ (3 x K4)
	10.24	$235.52 \times K4$ (23 x K4)	$10.24 \times K4$ (1 x K4)	$30.72 \times K4$ (3 x K4)
Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 2: K4 = 6 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion. K4 = 3 is the measurement relaxation factor applicable for UE fulfilling the lowMobilityEvaluation [2] criterion or fulfilling the cellEdgeEvaluation [2] criterion.				

Table 5.1B.2.9-2: $T_{\text{detect,NR_Intra_RedCap_Relax}}$, $T_{\text{measure,NR_Intra_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ for inactive Redcap UE configured with eDRX_IDLE cycle, (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	Scaling Factor (N1)	$T_{\text{detect,NR_Intra_RedCap_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure,NR_Intra_RedCap_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)
20.48 $\leq$ eDRX_IDLE cycle length ≤ 10485.76	0.32	8	$11.52 \times N1 \times M2 \times K4$ (36 x N1 x M2 x K4)	$1.28 \times N1 \times M2 \times K4$ (4 x N1 x M2 x K4)	$5.12 \times N1 \times M2 \times K4$ (16 x N1 x M2 x K4)
	0.64	5	$17.92 \times N1 \times K4$ (28 x N1 x K4)	$1.28 \times N1 \times K4$ (2 x N1 x K4)	$5.12 \times N1 \times K4$ (8 x N1 x K4)
	1.28	4	$32 \times N1 \times K4$ (25 x N1 x K4)	$1.28 \times N1 \times K4$ (1 x N1 x K4)	$6.4 \times N1 \times K4$ (5 x N1 x K4)
	2.56	3	$58.88 \times N1 \times K4$ (23 x N1 x K4)	$2.56 \times N1 \times K4$ (1 x N1 x K4)	$7.68 \times N1 \times K4$ (3 x N1 x K4)
	5.12	3	$117.76 \times N1 \times K4$ (23 x N1 x K4)	$5.12 \times N1 \times K4$ (1 x N1 x K4)	$15.36 \times N1 \times K4$ (3 x N1 x K4)
	10.24	3	$235.52 \times N1 \times K4$ (23 x N1 x K4)	$10.24 \times N1 \times K4$ (1 x N1 x K4)	$30.72 \times N1 \times K4$ (3 x N1 x K4)
Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 2: K4 = 6 is the measurement relaxation factor applicable for UE fulfilling the stationaryMobilityEvaluation [2] criterion. K4 = 3 is the measurement relaxation factor applicable for UE fulfilling the lowMobilityEvaluation [2] criterion or fulfilling the cellEdgeEvaluation [2] criterion.					

5.1B.2.10 Measurements of inter-frequency NR cells for UE configured with relaxed measurement criterion

The requirements in clause 4.2B.2.10 apply for UE configured with relaxed measurement criterion except when UE is configured with eDRX_IDLE cycle greater than 10.24 s and UE has fulfilled stationary criterion or low mobility criterion or not-at-cell edge criterion.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, and UE has fulfilled stationary criterion or low mobility criterion or not-at-cell edge criterion, then the requirements in Table 5.1B.2.10-1 and Table 5.1B.2.10-2 respectively apply provided that eDRX cycle is ≤ 10485.76 sec.

Table 5.1B.2.10-1: $T_{\text{detect,NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ for inactive Redcap UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	$T_{\text{detect,NR_Inter_RedCap_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure,NR_Inter_RedCap_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ [s] (number of DRX or INACTIVE eDRX cycles)
20.48 $\leq$ eDRX_IDLE cycle length ≤ 10485.76	0.32	$11.52 \times M2 \times K4$ (36 $\times$ M2 $\times$ K4)	$1.28 \times M2 \times K4$ (4 $\times$ M2 $\times$ K4)	$5.12 \times M2 \times K4$ (16 $\times$ M2 $\times$ K4)
	0.64	$17.92 \times K4$ (28 $\times$ K4)	$1.28 \times K4$ (2 $\times$ K4)	$5.12 \times K4$ (8 $\times$ K4)
	1.28	$32 \times K4$ (25 $\times$ K4)	$1.28 \times K4$ (1 $\times$ K4)	$6.4 \times K4$ (5 $\times$ K4)
	2.56	$58.88 \times K4$ (23 $\times$ K4)	$2.56 \times K4$ (1 $\times$ K4)	$7.68 \times K4$ (3 $\times$ K4)
	5.12	$117.76 \times K4$ (23 $\times$ K4)	$5.12 \times K4$ (1 $\times$ K4)	$15.36 \times K4$ (3 $\times$ K4)
	10.24	$235.52 \times K4$ (23 $\times$ K4)	$10.24 \times K4$ (1 $\times$ K4)	$30.72 \times K4$ (3 $\times$ K4)
Note 1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 2: K3 = 6 is the measurement relaxation factor applicable for UE fulfilling the <i>stationaryMobilityEvaluation</i> [2] criterion. K1 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion or fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.				

Table 5.1B.2.10-2: $T_{\text{detect,NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ for inactive Redcap UE configured with eDRX_IDLE cycle, (Frequency range FR2)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	Scaling Factor (N1)	$T_{\text{detect,NR_Inter_RedCap_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure,NR_Inter_RedCap_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)
20.48 $\leq$ eDRX_IDLE cycle length ≤ 10485.76	0.32	8	$11.52 \times N1 \times M2 \times K4$ (36 $\times$ N1 $\times$ M2 $\times$ K4)	$1.28 \times N1 \times M2 \times K4$ (4 $\times$ N1 $\times$ M2 $\times$ K4)	$5.12 \times N1 \times M2 \times K4$ (16 $\times$ N1 $\times$ M2 $\times$ K4)
	0.64	5	$17.92 \times N1 \times K4$ (28 $\times$ N1 $\times$ K4)	$1.28 \times N1 \times K4$ (2 $\times$ N1 $\times$ K4)	$5.12 \times N1 \times K4$ (8 $\times$ N1 $\times$ K4)
	1.28	4	$32 \times N1 \times K4$ (25 $\times$ N1 $\times$ K4)	$1.28 \times N1 \times K4$ (1 $\times$ N1 $\times$ K4)	$6.4 \times N1 \times K4$ (5 $\times$ N1 $\times$ K4)
	2.56	3	$58.88 \times N1 \times K4$ (23 $\times$ N1 $\times$ K4)	$2.56 \times N1 \times K4$ (1 $\times$ N1 $\times$ K4)	$7.68 \times N1 \times K4$ (3 $\times$ N1 $\times$ K4)
	5.12	3	$117.76 \times N1 \times K4$ (23 $\times$ N1 $\times$ K4)	$5.12 \times N1 \times K4$ (1 $\times$ N1 $\times$ K4)	$15.36 \times N1 \times K4$ (3 $\times$ N1 $\times$ K4)
	10.24	3	$235.52 \times N1 \times K4$ (23 $\times$ N1 $\times$ K4)	$10.24 \times N1 \times K4$ (1 $\times$ N1 $\times$ K4)	$30.72 \times N1 \times K4$ (3 $\times$ N1 $\times$ K4)
Note1: M2 = 1.5 if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise M2=1. Note 2: K4 = 6 is the measurement relaxation factor applicable for UE fulfilling the <i>stationaryMobilityEvaluation</i> [2] criterion. K4 = 3 is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion or fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.					

5.1B.2.11 Measurements of inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion

The requirements in clause 4.2B.2.11 apply for UE configured with relaxed measurement criterion except when UE is configured with eDRX_IDLE cycle greater than 10.24 s and UE has fulfilled stationary criterion or low mobility criterion or not-at-cell edge criterion.

If the UE is configured with eDRX_IDLE cycle greater than 10.24 s in FR1 and FR2, and UE has fulfilled stationary criterion or low mobility criterion or not-at-cell edge criterion, then the requirements in Table 5.1B.2.11-1 apply provided that eDRX cycle is ≤ 10485.76 sec.

Table 5.1B.2.11-1: $T_{\text{detect,NR_Inter_RedCap_Relax}}$, $T_{\text{measure,NR_Inter_RedCap_Relax}}$ and $T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ for inactive Redcap UE configured with eDRX_IDLE cycle (Frequency range FR1)

eDRX_IDLE cycle length [s]	DRX or eDRX INACTIVE cycle length [s]	$T_{\text{detect, EUTRAN_RedCap_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{measure, EUTRAN_RedCap_Relax}}$ [s] (number of DRX or eDRX INACTIVE cycles)	$T_{\text{evaluate, EUTRAN_RedCap_Relax}}$ [s] (number of DRX or INACTIVE eDRX cycles)
20.48 $\leq \text{eDRX_IDLE cycle length} \leq 10485.76$	0.32	$11.52 \times M2 \times K4$ ($36 \times M2 \times K4$)	$1.28 \times M2 \times K4$ (4 x $M2 \times K4$)	$5.12 \times M2 \times K4$ (16 x $M2 \times K4$)
	0.64	$17.92 \times K4$ (28 x $K4$)	$1.28 \times K4$ (2 x $K4$)	$5.12 \times K4$ (8 x $K4$)
	1.28	$32 \times K4$ (25 x $K4$)	$1.28 \times K4$ (1 x $K4$)	$6.4 \times K4$ (5 x $K4$)
	2.56	$58.88 \times K4$ (23 x $K4$)	$2.56 \times K4$ (1 x $K4$)	$7.68 \times K4$ (3 x $K4$)
	5.12	$117.76 \times K4$ (23 x $K4$)	$5.12 \times K4$ (1 x $K4$)	$15.36 \times K4$ (3 x $K4$)
	10.24	$235.52 \times K4$ (23 x $K4$)	$10.24 \times K4$ (1 x $K4$)	$30.72 \times K4$ (3 x $K4$)
Note1: $M2 = 1.5$ if SMTC periodicity of measured intra-frequency cell > 20 ms; otherwise $M2=1$. Note 2: $K4 = 6$ is the measurement relaxation factor applicable for UE fulfilling the <i>stationaryMobilityEvaluation</i> [2] criterion. $K4 = 3$ is the measurement relaxation factor applicable for UE fulfilling the <i>lowMobilityEvaluation</i> [2] criterion or fulfilling the <i>cellEdgeEvaluation</i> [2] criterion.				

5.1C Cell Re-selection

5.1C.1 Introduction

The cell reselection procedure allows the UE to select a more suitable cell and camp on it.

When the UE is in *Camped Normally* state on a cell, the UE shall attempt to detect, synchronise, and monitor intra-frequency, inter-frequency cells indicated by the serving cell. For intra-frequency and inter-frequency cells the serving cell may provide explicit neighbour list, or only carrier frequency information and bandwidth information. UE measurement activity is also controlled by measurement rules defined in TS38.304 [1], allowing the UE to limit its measurement activity.

5.1C.2 Requirements

5.1C.2.1 UE measurement capability

The requirements in clause 4.2C.2.1 shall apply.

5.1C.2.2 Measurement and evaluation of serving cell

The requirements in clause 4.2C.2.2 shall apply.

5.1C.2.3 Measurements of intra-frequency NR cells

The requirements in clause 4.2C.2.3 shall apply. The requirements in clause 4.2C.2.7 apply for UE configured with relaxed measurement criterion.

5.1C.2.4 Measurements of inter-frequency NR cells

The requirements in clause 4.2C.2.4 shall apply. The requirements in clause 4.2C.2.8 apply for UE configured with relaxed measurement criterion.

5.1C.2.5 Maximum interruption in paging reception

The requirements in clause 4.2C.2.5 shall apply.

5.1C.2.6 General requirements

The requirements in clause 4.2C.2.9 shall apply.

5.2 Void

5.2B Configured Grant based Small Data Transmissions (CG-SDT) for RedCap

5.2B.1 Introduction

This section contains the requirements for Small Data Transmissions (SDT) for 1 Rx RedCap and 2 Rx RedCap.

The 1 Rx RedCap UE for determining whether to perform SDT procedure defined in clause 5.27 [7] applies:

- sdt-RSRP-Threshold-r17 as the signaled value of sdt-RSRP-Threshold-r17 [2] + 1 dB.

5.2B.2 Requirements on UE synchronization for small data transmissions for RedCap

The requirements in this clause are applicable for the RedCap UE performing small data transmissions using configured resources as [TS 38.331].

The UE is allowed to transmit using the configured uplink resources provided that the UE is synchronized towards (i.e. using the timing derived using the latest available N_{TA} value as specified in subclause 7.1A.2) the serving cell prior to transmission. If the UE is not able to obtain the synchronization towards the serving cell then the UE shall drop the small data transmission. The UE determines the small data transmission occasion according to the received CG-SDT configuration [TS 38.331].

5.2B.2.1 Void

5.2B.3 TA validation requirements for RedCap

When *cg-SDT-RSRP-ChangeThreshold* [TS 38.331] is configured for TA validation based on the RSRP change criterion according to clause 5.27.2 in [TS 38.321], the UE is allowed to transmit using CG-SDT using the timing derived using the latest available N_{TA} value as specified in subclause 7.1 provided that

- the first RSRP ($RSRP_1$) measurement and the second RSRP ($RSRP_2$) measurements used in the TA validation are valid measurements and,
- timing alignment validation for transmission using CG-SDT is valid according to the validation criteria in clause 5.27.2 in [TS 38.321].

$RSRP_1$ and $RSRP_2$ are considered valid provided that the conditions in Table 5.2B.3-1 are met for FR1 when UE is not configured with any eDRX cycle by serving gNB or core network.

RSRP₁ and RSRP₂ are considered valid provided that the conditions in Table 5.2B.3-2 are met for FR2-1 regardless of whether the UE is configured with eDRX cycle by serving gNB or core network (AMF).

RSRP₁ and RSRP₂ are considered valid provided that the conditions in Table 5.2B.3-3 are met for FR1 when UE is configured:

- only with RAN eDRX cycle ($T_{\text{eDRX-RAN}}$) by the serving gNB, or
- with both $T_{\text{eDRX-RAN}}$ by serving gNB and CN eDRX cycle ($T_{\text{eDRX-CN}}$) by the core network (AMF)

Table 5.2B.3-1 Valid measurement for FR1 without eDRX cycle

Measurement	FR1
RSRP ₁	$(T1 - \min(640\text{ms}, M1 \cdot T_{\text{DRX}})) \leq T1' \leq (T1 + \min(640\text{ms}, M1 \cdot T_{\text{DRX}}))$
RSRP ₂	$(T2 - \min(640\text{ms}, M1 \cdot T_{\text{DRX}})) \leq T2' \leq T2$

Table 5.2B.3-2 Valid measurement for FR2-1

Measurement	FR2-1
RSRP ₁	$(T1 - \max\{480\text{ms}, 8 \cdot \text{SMTC periodicity}\}) \leq T1' \leq (T1 + \max\{480\text{ms}, 8 \cdot \text{SMTC periodicity}\})$
RSRP ₂	$(T2 - \max\{480\text{ms}, 8 \cdot \text{SMTC periodicity}\}) \leq T2' \leq T2$

Table 5.2B.3-3 Valid measurement for FR1 with eDRX cycle

Measurement	FR1
RSRP ₁	$(T1 - \min(640\text{ms}, M1 \cdot T)) \leq T1' \leq (T1 + \min(640\text{ms}, M1 \cdot T))$
RSRP ₂	$(T2 - \min(640\text{ms}, M1 \cdot T_{\text{eDRX-RAN}})) \leq T2' \leq T2$
Note 1: T is determined according to clause 7.1 in [1].	

If at least one of RSRP₁ and RSRP₂ is considered to be invalid based on the above conditions, then the UE shall not validate the CG-SDT using RSRP₁ and RSRP₂ and shall not transmit using CG-SDT. Additionally, for the initial CG-SDT transmission, the UE shall not transmit in an CG-SDT occasion that occurs more than 640 ms after T2.

Where:

- T1 is the time when the latest N_{TA} was obtained by the UE via:
 - *RRCRelease* with CG-SDT configuration (TS 38.331 [2]) is received, or
 - the latest TA is received if TA is received while in RRC_INACTIVE state.
- T1' is the time when the UE has completed RSRP₁.
- T2 is the time when the UE performs TA validation as defined in clause 5.27.2 in [TS 38.321] for transmission using CG-SDT.
- T2' is the time when the UE has completed RSRP₂.
- T_{DRX} is the DRX cycle length in ms.
- M1 the scaling factor as defined in clause 4.2.2.2.

5.2B.3.1 Void

5.2B.3.2 Void

5.2B.4 Scheduling restriction

The requirements in clause 5.5.4 shall apply for RedCap UEs.

5.2B.5 Applicability conditions for CG-SDT for RedCap

The UE is not required to meet the following measurement requirements during subsequent SDT transmissions:

- Measurements of inter-frequency NR cells in clause 5.1B.2.4
- Measurements of inter-RAT E-UTRAN cells in clause 5.1B.2.5

5.3 Minimization of Drive Tests (MDT)

5.3.1 Introduction

UE supporting minimisation of drive tests in RRC_INACTIVE shall be capable of:

- logging measurements in RRC_INACTIVE, reporting the logged measurements and meeting requirements in clause 5.3.1;
- logging of RRC connection establishment failure, reporting the logged failure and meeting requirements in clause 5.3.1;
- logging of radio link failure and handover failure, reporting the logged failure and meeting requirements in clause 5.3.1.

The logged MDT requirements consist of measurement requirements as specified in clause 5.3.2 and relative time stamp accuracy requirements as specified in clause 5.3.3. Both sets of requirements are applicable for intra-frequency, inter-frequency and inter-RAT cases in RRC_INACTIVE state. The MDT procedures are described in TS 37.320 [31].

For RRC connection establishment failure logging and reporting, the MDT requirements consist of requirements for measurements performed and logged in RRC_INACTIVE state specified in clause 5.3.2 and relative time stamp accuracy requirement for RRC connection establishment failure log reporting as specified in clause 5.3.4.

5.3.2 Measurement Requirements

The measurements and measurement requirements applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3.2.

5.3.3 Requirements for Relative Time Stamp Accuracy

The requirements for relative time stamp accuracy applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3.3.

5.3.4 Requirements for Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting

The requirements for relative time stamp accuracy for RRC connection establishment failure applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3.4.

5.3.5 Requirements for Relative Time Stamp Accuracy for Radio Link Failure and Handover Failure Log Reporting

The requirements for relative time stamp accuracy for RRC link failure and handover failure applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3.5.

5.3.6 Requirements for Relative Time Stamp Accuracy for RRC Resume Failure Log Reporting

The requirements for relative time stamp accuracy for RRC resume failure applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3.4.

5.3C Minimization of Drive Tests (MDT) for Satellite Access

Editor's note: the exact signalling names in the clause and values are subject to confirmation by RAN2 and change during performance requirement phase, respectively. And the brackets shall be removed by further agreements.

5.3C.1 Introduction

UE supporting minimisation of drive tests in RRC_INACTIVE shall be capable of:

- logging measurements in RRC_INACTIVE, reporting the logged measurements and meeting requirements in clause 5.3C;
- logging of RRC connection establishment failure, reporting the logged failure and meeting requirements in clause 5.3C;
- logging of radio link failure and handover failure, reporting the logged failure and meeting requirements in clause 5.3C.

The logged MDT requirements consist of measurement requirements as specified in clause 5.3C.2 and relative time stamp accuracy requirements as specified in clause 5.3C.3. Both sets of requirements are applicable for intra-frequency and inter-frequency cases in RRC_INACTIVE state. The MDT procedures are described in TS 37.320 [31].

For RRC connection establishment failure logging and reporting, the MDT requirements consist of requirements for measurements performed and logged in RRC_INACTIVE state specified in clause 5.3C.2 and relative time stamp accuracy requirement for RRC connection establishment failure log reporting as specified in clause 5.3C.4.

5.3C.2 Measurement Requirements

The measurements and measurement requirements applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3C.2.

5.3C.3 Requirements for Relative Time Stamp Accuracy

The requirements for relative time stamp accuracy applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3C.3.

5.3C.4 Requirements for Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting

The requirements for relative time stamp accuracy for RRC connection establishment failure applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3C.4.

5.3C.5 Requirements for Relative Time Stamp Accuracy for Radio Link Failure and Handover Failure Log Reporting

The requirements for relative time stamp accuracy for RRC link failure and handover failure applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3C.5.

5.3C.6 Requirements for Relative Time Stamp Accuracy for RRC Resume Failure Log Reporting

The requirements for relative time stamp accuracy for RRC resume failure applicable for MDT in RRC_INACTIVE are the same as specified for MDT in RRC_IDLE in clause 4.3C.4.

5.4 Inactive Mode CA/DC Measurements

5.4.1 Introduction

A UE supporting *idleInactiveNR-MeasReport-r16*, *idleInactiveEUTRA-MeasReport-r16* or *idleInactiveNR-MeasReport-r17* shall perform the inactive mode measurement on the inter-frequency CA and DC candidate frequencies/cells and E-UTRAN inter-RAT DC candidate frequencies/cells indicated by higher layers and meet the requirement specified in this clause. The UE shall perform inactive mode measurements provided that the serving cell support early measurement and is within the validity area. The inactive mode measurement requirements apply to a configured carrier frequency and the serving cell are among the supported band combination of the UE.

5.4.2 Measurement Requirements

The requirements in clause 4.4.2 shall apply.

5.4.2.1 Detected cell requirement during state transition and inactive mode

The requirements in clause 4.4.2.1 shall apply.

5.4.2.2 Measurements of inter-frequency CA/DC candidate cells

The requirements in clause 4.4.2.2 shall apply.

5.4.2.3 Measurements on serving cell

The requirements in clause 4.4.2.3 shall apply.

5.4.2.4 Measurements on E-UTRAN inter-RAT DC candidate cells

The requirements in clause 4.4.2.4 shall apply.

5.5 Configured Grant based Small Data Transmissions (CG-SDT)

5.5.1 Introduction

The requirements in this clause are applicable when the UE is configured with timing alignment (TA) validation using *cg-SDT-RSRP-ChangeThreshold* for transmitting in uplink using CG-SDT as specified in [TS 38.331].

5.5.2 Requirements on UE synchronization for small data transmissions

The requirements in this clause are applicable for the UE performing small data transmissions using configured resources as [TS 38.331].

The UE is allowed to transmit using the configured uplink resources provided that the UE is synchronized towards (i.e. using the timing derived using the latest available N_{TA} value as specified in subclause 7.1.2) the serving cell prior to transmission. If the UE is not able to obtain the synchronization towards the serving cell then the UE shall drop the small data transmission. The UE determines the small data transmission occasion according to the received CG-SDT configuration [TS 38.331].

5.5.3 TA validation requirements

When *cg-SDT-RSRP-ChangeThreshold* [TS 38.331] is configured for TA validation based on the RSRP change criterion according to clause 5.8.2 in [TS 38.321], the UE is allowed to transmit using CG-SDT using the timing derived using the latest available N_{TA} value as specified in subclause 7.1 provided that

- the first RSRP ($RSRP_1$) measurement and the second RSRP ($RSRP_2$) measurements used in the TA validation are valid measurements and,
- timing alignment validation for transmission using CG-SDT is valid according to the validation criteria in clause 5.8.2 in [TS 38.321].

$RSRP_1$ and $RSRP_2$ are considered valid provided that the conditions in Table 5.5.3-1 and Table 5.5.3-2 are met for FR1 and FR2-1.

Table 5.5.3-1 Valid measurement for FR1 for UE not configurd with eDRX cycle

Measurement	FR1
$RSRP_1$	$(T1 - \min(640\text{ms}, M1 \cdot T_{DRX})) \leq T1' \leq (T1 + \min(640\text{ms}, M1 \cdot T_{DRX}))$
$RSRP_2$	$(T2 - \min(640\text{ms}, M1 \cdot T_{DRX})) \leq T2' \leq T2$

Table 5.5.3-2 Valid measurement for FR2-1

Measurement	FR2-1
$RSRP_1$	$(T1 - \max(480\text{ms}, 8 \cdot \text{SMTC periodicity})) \leq T1' \leq (T1 + \max(480\text{ms}, 8 \cdot \text{SMTC periodicity}))$
$RSRP_2$	$(T2 - \max(480\text{ms}, 8 \cdot \text{SMTC periodicity})) \leq T2' \leq T2$

Table 5.5.3-3 Valid measurement for FR1 for UE configured with eDRX_cycle

Measurement	FR1
$RSRP_1$	$(T1 - \min(640\text{ms}, M1 \cdot T_{eDRX-RAN})) \leq T1' \leq (T1 + \min(640\text{ms}, M1 \cdot T_{eDRX-RAN}))$
$RSRP_2$	$(T2 - \min(640\text{ms}, M1 \cdot T_{eDRX-RAN})) \leq T2' \leq T2$

If at least one of $RSRP_1$ and $RSRP_2$ is considered to be invalid based on the above conditions, then the UE shall not validate the CG-SDT using $RSRP_1$ and $RSRP_2$ and shall not transmit using CG-SDT. Additionally, for the initial CG-SDT transmission, the UE shall not transmit in an CG-SDT occasion that occurs more than 640 ms after T2.

Where:

- T1 is the time when
 - *RRCRelease* with CG-SDT configuration (TS 38.331 [2]) is received, or
 - the latest TA is received if TA is received while in RRC_INACTIVE state.
- T1' is the time when the UE has completed $RSRP_1$.
- T2 is the time when the UE performs TA validation as defined in clause 5.27.2 in (TS 38.321 [7]) for transmission using CG-SDT.
- T2' is the time when the UE has completed $RSRP_2$.
- T_{DRX} is the DRX cycle length in ms.

- M1 the scaling factor as defined in clause 4.2.2.2.

5.5.4 Scheduling restriction

5.5.4.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRP measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

5.5.4.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to SS-RSRP/RSRQ measurement

- If *deriveSSB_IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.
- If *deriveSSB_IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH on all symbols within SMTC window duration.

For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to measurement of serving cell.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/ on SSB symbols of the serving cell.

5.5.4.3 Scheduling availability of UE performing measurements on FR2

The following scheduling restriction applies due to SS-RSRP measurement on an FR2 intra-frequency cell

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration (The signaling *deriveSSB_IndexFromCell* is always enabled for FR2).

The following scheduling restriction applies to SS-RSRQ measurement on an FR2 intra-frequency cell

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/ on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration (The signaling *deriveSSB_IndexFromCell* is always enabled for FR2).

The following scheduling restriction applies to measurement on an FR2 serving cell

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/ on SSB symbols of the serving cell.

5.5.5 Applicability conditions for SDT

The UE is not required to meet the following measurement requirements during subsequent SDT transmissions:

- Measurements of inter-frequency NR cells in clause 5.1.2.4
- Measurements of inter-RAT E-UTRAN cells in clause 5.1.2.5
- Inactive Mode CA/DC Measurements in clause 5.4

The UE is allowed to delay the reception of PRS resources on the positioning frequency layer until the SDT session is completed if the measurement using PRS resource overlaps with the SDT resources.

5.6 NR measurements for positioning

5.6.1 Introduction

This clause contains requirements for UE capable of performing NR positioning measurements defined in TS 38.215 [4], including RSTD, PRS-RSRP, UE Rx-Tx time difference and PRS-RSRPP, in RRC_INACTIVE state.

The requirements in clauses 5.6.2, 5.6.3, 5.6.4 and 5.6.5 are applicable to PRS resources that do not collide with other DL signals/channels which include SSB, SIB1, CORESET0, MSG2/MSGB, paging and DL SDT. In addition, a UE is not expected to receive PRS resources that collide with a time interval starting at symbol m and ending at symbol $m + N_2$, where symbol m is the last symbol in which the UE is configured to receive PDCCH and N_2 is defined in clause 6.4 of [26, TS 38.214] for the subcarrier spacing μ of the DL PRS.

If a PRS resource is outside or partially overlapped with the initial DL BWP, a PRS resource instance collides with another DL signal/channel if any portion of the other DL signal/channel overlaps with the time interval starting X symbols before the PRS instance and ending X symbols after the PRS instance, taking into account *nr-DL-PRS-ExpectedRSTD-Uncertainty* and *nr-DL-PRS-ExpectedRSTD*, where X is defined in Table 5.6.1-1.

Table 5.6.1-1: Value of X number of symbols

FR	μ	NR Slot length (ms)	X symbols
FR1	0	1	7
	1	0.5	14
	2	0.25	28
FR2	2	0.25	14
	3	0.125	28
Note 1: The FR1 value applies if one or both of the serving cell and the positioning frequency layer are in FR1. FR2 value applies if both of the serving cell and the positioning frequency layer are in FR2.			

All measurement requirements specified in clauses 5.6.2, 5.6.3, 5.6.4 and 5.6.5 shall apply for any DRX configuration specified in TS 38.331 [2].

The requirements in clauses 5.6.2, 5.6.3, 5.6.4 and 5.6.5 are applicable provided that the cell selection procedure for the selected PLMN defined in TS 38.304 [1] is not triggered during PRS measurement period.

The requirements in clauses 5.6.2, 5.6.3, 5.6.4 and 5.6.5 apply provided that all PRS resources within a PFL are within up to 2 separate windows within $T_{\text{PRS},i}$ for each positioning frequency layer i as defined in clauses 5.6.2, 5.6.3, 5.6.4 and 5.6.5, where each window is up to 10ms.

The UE is not required to perform additional SSB measurement for the SSB configured as QCL source of PRS resources.

When the UE is configured with measurement for more than one positioning requests, the measurement period for each request may be longer than measurement period when UE is configured with measurement for single positioning request.

5.6.2 RSTD measurements

5.6.2.1 Introduction

The requirements in clause 5.6.2 shall apply provided the UE has received *NR-DL-TDOA-RequestLocationInformation* message from the LMF via LPP [34] requesting the UE to measure and report DL RSTD measurements defined in TS 38.215 [4].

5.6.2.2 Requirements Applicability

The requirements in clause 5.6.2 apply for periodic and triggered RSTD measurements, provided:

- PRS-RSTD related side conditions given in clause 10.1.23.2 for FR1 and FR2 are fulfilled, for a corresponding Band.

5.6.2.3 Measurement Capability

The UE PRS RSTD measurement capability in RRC_INACTIVE state is as indicated by the UE in *NR-DL-TDOA-ProvideCapabilities*, according to TS 37.355 [34].

5.6.2.4 Measurement Reporting Requirements

The measurement reporting delay is defined as the time between the moment when the periodic measurement report is triggered and the moment when the UE is ready to transmit the measurement report over the air interface. If the UE supports reporting of NR positioning measurements via SDT, the UE may be able to report the measurements while it remains in RRC_INACTIVE state; otherwise, the UE will transition to RRC_CONNECTED state prior to transmitting the measurement report.

For RSTD measurements performed by the UE in RRC_INACTIVE state, the measurement reporting delay excludes all of the following:

- additional delay caused by other LPP signalling on the DCCH,
- delay uncertainty introduced when inserting the measurement report in the TTI of the uplink DCCH, equal to 2 x TTI_{DCCH} where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration,
- any delay caused by unavailability of UL resources to transmit the measurement report,
- any transmission delay needed by SDT,
- the time needed to transition to RRC_CONNECTED state to report the measurements.

The reported RSTD measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in clause 10.1.23.3.

The RSTD measurements performed and reported according to this section shall meet the RSTD measurement accuracy requirements in clause 10.1.23.2, for each measured DL PRS resource.

5.6.2.5 Measurements Period Requirements

After receiving both *NR-DL-TDOA-ProvideAssistanceData* message and *NR-DL-TDOA-RequestLocationInformation* message from the LMF via LPP [34], the UE shall be able to measure multiple (up to the UE capability specified in Clause 5.6.2.3) DL RSTD measurements, defined in TS 38.215 [4], during the measurement period $T_{RSTD,Total}$ defined as:

$$T_{RSTD,Total} = \sum_{i=1}^L T_{RSTD,i} + (L - 1) * \max(T_{effect,i})$$

Where:

- i is the index of positioning frequency layer,
- L is total number of positioning frequency layers, and
- $T_{\text{effect},i}$ is the periodicity of the PRS RSTD measurement in positioning frequency layer i

$T_{\text{RSTD},i}$ is the measurement period for PRS RSTD measurement in positioning frequency layer i as specified below:

$$T_{\text{RSTD},i} = \left(K_{\text{carrier_PRS}} * N_{\text{Rx,TEG},i} * N_{\text{RxBeam},i} * \left\lceil \frac{N_{\text{PRS},i}^{\text{slot}}}{N'} \right\rceil * \left\lceil \frac{L_{\text{available_PRS},i}}{N} \right\rceil * N_{\text{sample}} - 1 \right) * T_{\text{effect},i} + T_{\text{last},i} ,$$

Where:

- $N_{\text{RxBeam},i}$ is the UE Rx beam sweeping factor:
- $N_{\text{RxBeam},i} = 1$ if positioning frequency layer i is in FR1, and if positioning frequency layer i is in FR2
 - $N_{\text{RxBeam},i}$ equals to the value as UE reported in *supportedLowerRxBeamSweepingFactor-FR2* if the capability is reported by the UE for the band containing positioning frequency layer i , and LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-DL-TDOA-RequestLocationInformation*.
- $N_{\text{RxBeam},i}$ equals to 8, otherwise.
- $K_{\text{carrier_PRS}}$ is a scaling factor for PRS-based NR positioning measurements in RRC_INACTIVE. If the UE supports *parallelPRS-MeasRRC-Inactive-r17*, $K_{\text{carrier_PRS}} = 1$; otherwise,
- If $S_{\text{rxlev}} \leq S_{\text{nonIntraSearchP}}$ or $S_{\text{qual}} \leq S_{\text{nonIntraSearchQ}}$, $K_{\text{carrier_PRS}} = K_{\text{carrier}} + 1$, where K_{carrier} is defined in clause 4.2.2.4
- If $S_{\text{rxlev}} > S_{\text{nonIntraSearchP}}$ and $S_{\text{qual}} > S_{\text{nonIntraSearchQ}}$, $K_{\text{carrier_PRS}} = N_{\text{layers}} + 1$, where N_{layers} is defined in clause 4.2.2.7.
- $N_{\text{Rx,TEG},i}$ is the Rx TEG specific scaling factor:
 - $N_{\text{Rx,TEG},i} = 1$ if the UE is not configured by the LMF to measure a PRS resource with multiple Rx TEGs via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34].
 - $N_{\text{Rx,TEG},i}$ is defined as follows if the UE is configured by the LMF with *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34] to perform measurement on same DL PRS resource of a TRP using different Rx TEGs in *NR-DL-TDOA-RequestLocationInformation* [34]:
 - $N_{\text{Rx,TEG},i} = P$, if the UE is not capable of measuring same DL PRS resource simultaneously from multiple Rx TEGs, where P is the number of UE Rx TEGs that the UE is requested by LMF to measure the same DL-PRS Resource of a TRP indicated by *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* in [34], and in case 'n0' is indicated, P is the maximum number of Rx TEGs with which UE can support to measure the same PRS resource as reported in *NR-UE-TEG-Capability*.
 - $N_{\text{Rx,TEG},i} = \left\lceil \frac{P}{Q} \right\rceil$, if the UE is capable of measuring the same DL PRS resource simultaneously from multiple Rx TEGs, where Q is the number of UE Rx TEGs for measuring the same DL-PRS Resource simultaneously indicated by *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul-r17* in [34].
- $N_{\text{PRS},i}^{\text{slot}}$ is the maximum number of DL PRS resources in positioning frequency layer i configured in a slot.
- $L_{\text{available_PRS},i}$ is the time duration of available PRS in positioning frequency layer i to be measured within $T_{\text{PRS},i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{\text{available_PRS},i}$, only unmuted PRS resources that are not fully overlapped with other higher-priority DL signals/channels are considered.
- N_{sample} is the number of PRS RSTD samples, where

- $N_{sample} = 1$ if the UE supports *supportedDL-PRS-ProcessingSamples-RRC-Inactive* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and meets the following conditions:
 - PRS bandwidth is within the initial BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
- $N_{sample} = 2$ if the UE supports *supportedDL-PRS-ProcessingSamples-RRC-Inactive* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and does not meet the following conditions:
 - PRS bandwidth is within the initial BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
- $N_{sample} = 4$ otherwise.
- $T_{last,i}$ is the measurement duration for the last PRS RSTD sample in positioning frequency layer i , including the sampling time and processing time, $T_{last,i} = T_i + T_{available_PRS,i}$,
- $T_{effect,i}$ is the periodicity of the PRS RSTD measurement in positioning frequency layer i defined as:

$$T_{effect,i} = \left\lceil \frac{T_i}{T_{available_PRS,i}} \right\rceil * T_{available_PRS,i}$$

Where:

- T_i corresponds to *durationOfPRS-ProcessingSymbolsInEveryTms-r17* in TS 37.355 [34],
- $T_{available_PRS,i} = LCM(T_{PRS,i}, T_{DRX})$, the least common multiple between $T_{PRS,i}$ and the DRX cycle length T_{DRX}
- $T_{PRS,i}$ is the periodicity of DL PRS resource with muting on positioning frequency layer i .

If more than one PRS periodicities are configured in positioning frequency layer i , the least common multiple of PRS periodicities $T_{per}^{PRS \text{ with muting}}$ among all DL PRS resource sets in the positioning frequency layer is used to derive $T_{PRS,i}$, where,

- $T_{per}^{PRS \text{ with muting}} = N_{muting} * T_{per}^{PRS}$, is the PRS periodicity with muting per PRS resource,
- T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*.
- N_{muting} is the scaling factor considering PRS resource muting. $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where
- T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$.
- $\{N, T\}$ is the UE capability combination per band for RRC_INACTIVE state where N is a duration of DL PRS symbols in ms corresponding to *durationOfPRS-ProcessingSymbols-r17* in TS 37.355 [34], T (ms) corresponds to *durationOfPRS-ProcessingSymbolsInEveryTms-r17* in TS 37.355 [34], $[$ and $T-N (>0)$ is the time required to process duration N of DL PRS symbols already buffered in memory], for a given maximum bandwidth supported by UE corresponding to *supportedBandwidthPRS* in TS 37.355 [34],
- N' is UE capability for number of DL PRS resources that it can process in a slot [in RRC_INACTIVE state as indicated by *maxNumOfDL-PRS-ResProcessedPerSlot-RRC-Inactive-r17* specified in TS 37.355 [34].

The time $T_{RSTD,Total}$ starts from the first DRX cycle containing the DL PRS resource(s) in the assistance data after both the *NR-DL-TDOA-ProvideAssistanceData* message and *NR-DL-TDOA-RequestLocationInformation* message are delivered from LMF to the UE via LPP [34].

Note: No per-positioning frequency layer requirement is applied in scenarios when multiple positioning frequency layers are configured.

If the DRX cycle is reconfigured during the RSTD measurement period, then the measurement period can be longer.

When PRS-RSRP is configured for DL-TDOA, RSTD and PRS-RSRP are performed over the same measurement period.

The measurement requirements do not apply to any PRS resource that always collides with other higher-priority DL signals/channels, as specified in clause 5.6.1.

Longer RSTD measurement period is expected when there are collisions between PRS resources and other higher-priority DL signals/channels.

If $K_{\text{carrier_PRS}}$ changes for any PFL during the measurement period, the measurement period could be longer.

The measurement requirements do not apply for a PRS resource, if the PRS resource is across two sampling duration of N within duration $L_{\text{available_PRS},i}$.

The measurement requirements do not apply for a PRS resource, if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N .

The requirements in clause 5.6.2 do not apply if the PRS configuration given by higher layer parameters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-DL-TDOA-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

If cell re-selection occurs while RSTD measurements are being performed, then the UE shall continue and complete the on-going RSTD measurements after the cell selection is completed. The RSTD measurement period can be longer.

If the RRC state transition occurs from *RRC_INACTIVE* to *RRC_CONNECTED* state during the RSTD measurement period then the UE shall continue the RSTD measurement in the *RRC_CONNECTED* state. The RSTD measurement period can be longer.

5.6.3 PRS-RSRP measurements

5.6.3.1 Introduction

The requirements in clause 5.6.3 shall apply provided the UE has received a message from LMF via LPP [34] requesting the UE to measure and report PRS-RSRP measurements defined in TS 38.215 [4] and the UE is capable of supporting the PRS-RSRP measurement in *RRC_INACTIVE* state.

5.6.3.2 Requirements applicability

The requirements in clause 5.6.3 apply for periodic and triggered PRS-RSRP measurements, provided:

- PRS-RSRP related side conditions given in clause 10.1.24.2 are met for a corresponding Band.

5.6.3.3 Measurement Capability

UE PRS-RSRP measurement capability is as indicated by the UE in *NR-DL-AoD-ProvideCapabilities* according to TS 37.355 [34].

5.6.3.4 Measurement Reporting Requirements

The measurement reporting delay is defined as the time between the moment when the periodic measurement report is triggered and the moment when the UE is ready to transmit the measurement report over the air interface. If the UE supports reporting of NR positioning measurements via SDT, the UE may be able to report the measurements while it remains in *RRC_INACTIVE* state; otherwise, the UE will transition to *RRC_CONNECTED* state prior to transmitting the measurement report.

For PRS-RSRP measurements performed by the UE in *RRC_INACTIVE* state, the measurement reporting delay excludes all of the following:

- any delay caused by other LPP signalling on the DCCH,
- delay uncertainty introduced when inserting the measurement report in the TTI of the uplink DCCH which is equal to $2 \times \text{TTI}_{\text{DCCH}}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration,
- any delay caused by no UL resources for UE to send the measurement report,
- any transmission delay needed by SDT,
- the time needed to transition to RRC_CONNECTED state to report the measurements.

The reported PRS-RSRP measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in clauses 10.1.24.3.

The PRS-RSRP measurement accuracy for all measured PRS resources shall be fulfilled according to the accuracy requirements specified in the clauses 10.1.24.2.

5.6.3.5 Measurement Period Requirements

When the physical layer receives *NR-DL-AoD-ProvideAssistanceData* message and *NR-DL-AoD-RequestLocationInformation* message from LMF via LPP [34], the UE shall be able to measure multiple (up to the UE capability specified in Clause 5.6.3.3) PRS-RSRP measurements, defined in TS 38.215 [4], from configured PRS resources for configured TRPs on configured positioning frequency layers, within $T_{\text{PRS-RSRP, total}}$ ms.

$$T_{\text{PRS-RSRP, total}} = \sum_{i=1}^L T_{\text{PRS-RSRP, } i} + (L - 1) * \max(T_{\text{effect, } i})$$

Where:

- i is the index of positioning frequency layer,
- L is total number of positioning frequency layers,
- $T_{\text{effect, } i}$ is the periodicity of the PRS-RSRP measurement in positioning frequency layer i .

$$T_{\text{PRS-RSRP, } i} = \left(K_{\text{carrier_PRS}} * N_{\text{RxBeam, } i} * \left\lceil \frac{N_{\text{PRS, } i}^{\text{slot}}}{N'} \right\rceil \left\lceil \frac{L_{\text{available_PRS, } i}}{N} \right\rceil * N_{\text{sample}} - 1 \right) * T_{\text{effect, } i} + T_{\text{last, } i} \text{ Where:}$$

- $K_{\text{carrier_PRS}}$ is a scaling factor for PRS-based NR positioning measurements in RRC_INACTIVE. If the UE supports *parallelPRS-MeasRRC-Inactive-r17*, $K_{\text{carrier_PRS}} = 1$. Otherwise,
- If $\text{Srxlev} \leq \text{S}_{\text{nonIntraSearchP}}$ or $\text{Squal} \leq \text{S}_{\text{nonIntraSearchQ}}$, $K_{\text{carrier_PRS}}$ equals to the sum of K_{carrier} in 4.2.2.4 and one positioning layer.
- If $\text{Srxlev} > \text{S}_{\text{nonIntraSearchP}}$ and $\text{Squal} > \text{S}_{\text{nonIntraSearchQ}}$, $K_{\text{carrier_PRS}}$ equals to the sum of N_{layer} in 4.2.2.7 and one positioning layer.
- $N_{\text{RxBeam, } i}$ is the scaling factor for Rx beam sweeping:
 - $N_{\text{RxBeam, } i} = 1$ if positioning frequency layer i is in FR1, and if positioning frequency layer i is in FR2
 - $N_{\text{RxBeam, } i}$ equals to the value as UE reported in *supportedLowerRxBeamSweepingFactor-FR2* if the capability is reported by the UE for the band containing positioning frequency layer i , and LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-DL-AoD-RequestLocationInformation*.
 - $N_{\text{RxBeam, } i}$ equals to 8, otherwise.
- $L_{\text{available_PRS, } i}$ is the time duration of available PRS to be measured in the positioning frequency layer i to be measured during $T_{\text{PRS, } i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{\text{available_PRS, } i}$, only unmuted PRS resources that are not fully overlapped with other higher-priority DL signals/channels are considered.
- $N_{\text{PRS, } i}^{\text{slot}}$ is the maximum number of DL PRS resources of positioning frequency layer i configured in a slot,

- $\{N, T\}$ is UE capability combination per band where N is a duration of DL PRS symbols in ms corresponding to *durationOfPRS-ProcessingSymbols-r17* in TS 37.355 [34] processed every T ms corresponding to *durationOfPRS-ProcessingSymbolsInEveryTms-r17* in TS 37.355 [34] for a given maximum bandwidth supported by UE corresponding to *supportedBandwidthPRS* in TS 37.355 [34],
- N' is UE capability for number of DL PRS resources that it can process in a slot as indicated by *maxNumOfDL-PRS-ResProcessedPerSlot-RRC-Inactive-r17* in clause 6.4.3 of TS 37.355 [34],
- N_{sample} is the number of PRS-RSRP measurement samples and
 - $N_{sample} = 1$, if UE supports *supportedDL-PRS-ProcessingSamples-RRC-Inactive* [34], and the LMF indicates the UE to perform positioning measurements with reduced number of samples by *reducedDL-PRS-ProcessingSamples* [34], and the following conditions are met:
 - PRS bandwidth is within the initial BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
 - $N_{sample} = 2$, if UE supports *supportedDL-PRS-ProcessingSamples-RRC-Inactive* [34], and the LMF indicates the UE to perform positioning measurements with reduced number of samples by *reducedDL-PRS-ProcessingSamples* [34], and the following conditions are not met:
 - PRS bandwidth is within the initial BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
 - $N_{sample} = 4$ otherwise
- $T_{last,i} = T_i + T_{available_PRS,i}$ is the measurement duration for the last PRS-RSRP sample, including the sampling time and processing time,
 - $T_{effect,i} = \left\lceil \frac{T_i}{T_{available_PRS,i}} \right\rceil * T_{available_PRS,i}$ is the periodicity of PRS-RSRP measurement in positioning frequency layer i ,
 - T_i corresponds to *durationOfPRS-ProcessingSymbolsInEveryTms-r17* in TS 37.355 [34],
 - $T_{available_PRS,i} = LCM(T_{PRS,i}, T_{DRX})$ is the least common multiple between $T_{PRS,i}$ and T_{DRX} ,
 - $T_{PRS,i}$ is the maximum PRS resource periodicity among all PRS resources in positioning frequency layer i ,
 - T_{DRX} is the DRX cycle length.

If positioning frequency layer i has more than one DL PRS resource set with different PRS periodicities with muting, $T_{per}^{PRS \text{ with muting}} = N_{muting} * T_{per}^{PRS}$, the least common multiple of $T_{per}^{PRS \text{ with muting}}$ among the DL PRS resource sets is used to derive $T_{PRS,i}$, where:

- T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*.
- N_{muting} is the scaling factor considering PRS resource muting. $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$.

When PRS-RSRP measurements are configured for DL-AoD, the time $T_{PRS-RSRP,total}$ starts from the first DRX cycle containing the DL PRS resources in the assistance data after both the *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message from LMF via LPP [34] are delivered to the physical layer of UE.

Note: No per-positioning frequency layer requirement is applied in scenarios when multiple positioning frequency layers are configured.

When the PRS-RSRP measurement is configured together with RSTD measurement then the PRS-RSRP measurement shall meet the RSTD measurement requirements defined in clause 5.6.2.

When the PRS-RSRP measurement is configured together with UE Rx-Tx time difference measurement then the PRS-RSRP measurement shall meet the UE Rx-Tx time difference measurement requirements defined in clause 5.6.4.

The measurement requirements do not apply for a PRS resource:

- if the PRS resource is across two sampling duration of N within duration $L_{available_PRS,i}$ or
- if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N .

Longer PRS-RSRP measurement period is expected when there is collision/overlap between other DL signals/channels and PRS resources in RRC_INACTIVE state.

The requirements in clause 5.6.3 do not apply if the PRS configuration given by higher layer parameters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-DL-AoD-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

If the DRX cycle is reconfigured during the PRS-RSRP measurement period then the PRS-RSRP measurement period can be longer.

If cell reselection occurs while PRS-RSRP measurement is being performed, then the UE shall continue and complete the on-going PRS-RSRP measurement after the cell selection is completed. The PRS-RSRP measurement period can be longer.

If the UE's RRC state changes from the RRC_INACTIVE to RRC_CONNECTED during the PRS-RSRP measurement period, then the UE shall continue the PRS-RSRP measurement in the RRC_CONNECTED state. The PRS-RSRP measurement period can be longer.

5.6.4 UE Rx-Tx time difference measurements

5.6.4.1 Introduction

The requirements in this clause shall apply, provided the UE has received *nr-Multi-RTT-RequestLocationInformation* message from LMF via LPP [34] requesting the UE to measure and report one or more UE Rx-Tx time difference measurements defined in TS 38.215 [4].

5.6.4.2 Requirements Applicability

The requirements in clause 5.6.4 apply for periodic and triggered UE Rx-Tx time difference measurements, provided:

- UE Rx-Tx time difference measurement related side conditions given in clause 10.1.25.2 are met for a corresponding band.
- SRS is configured on the PCell.

5.6.4.3 Measurement Capability

UE Rx-Tx time difference measurement capability is as indicated by the UE in *NR-Multi-RTT-ProvideCapabilities*, according to TS 37.355 [34].

5.6.4.4 Measurement Reporting Requirements

The measurement reporting delay is defined as the time between the moment when the measurement report is triggered and the moment when the UE starts to transmit the measurement report over the air interface.

This measurement reporting delay excludes the delay caused by any of the following:

- delay caused by other LPP signalling on the DCCH.

- delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times \text{TTI}_{\text{DCCH}}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration.
- delay caused due to lack of UL resources for UE to send the measurement report.
- delay required by SDT for reporting the measurement using SDT resources.
- delay required for transition to RRC_CONNECTED state for report the measurement in RRC_CONNECTED.

The UE Rx-Tx time difference measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in clause 10.1. 25.3.

The UE Rx-Tx time difference measurement accuracy for all measured DL PRS resources shall be fulfilled according to the accuracy requirements specified in clause 10.1. 25.2.

5.6.4.5 Measurement Period Requirements

When physical layer receives last of *NR-Multi-RTT-ProvideAssistanceData* message and *NR-Multi-RTT-RequestLocationInformation* message from LMF via LPP [34], UE shall be able to measure multiple (up to the UE capability specified in clause 5.6.4.3) UE Rx-Tx time difference measurements as defined in TS 38.215 [4] in configured positioning frequency layers within the measurement period $T_{\text{UERxTx,Total}}$ ms.

$$T_{\text{UERxTx, Total}} = \sum_{i=1}^L T_{\text{UERxTx},i} + (L - 1) * \max(T_{\text{effect},i})$$

Where:

- i is the index of positioning frequency layer,
- $T_{\text{UERxTx},i}$ is the measurement period for UE Rx-Tx time difference measurements in positioning frequency layer i as further defined in this clause,
- L is total number of positioning frequency layers,
- $T_{\text{effect},i}$ is the periodicity of the UE Rx-Tx time difference measurement in positioning frequency layer i as defined further in this clause.

$$T_{\text{UERxTx},i} = \left(K_{\text{carrier_PRS}} * N_{\text{RxTx,TEG},i} * N_{\text{RxBeam},i} * \left\lceil \frac{N_{\text{PRS},i}^{\text{slot}}}{N'} \right\rceil \left\lfloor \frac{L_{\text{available_PRS},i}}{N} \right\rfloor * N_{\text{sample}} - 1 \right) * T_{\text{effect},i} + T_{\text{last},i}$$

Where:

- $K_{\text{carrier_PRS}} = 1$ if the UE is capable of *parallelPRS-MeasRRC-Inactive-r17* defined in [34].
- $K_{\text{carrier_PRS}} = N_{\text{layer}} + 1$ if the UE is not capable of *parallelPRS-MeasRRC-Inactive-r17* defined in [34] and if $\text{Srxlev} > \text{S}_{\text{nonIntraSearchP}}$ and $\text{Squal} > \text{S}_{\text{nonIntraSearchQ}}$; where N_{layer} is defined in clause 4.2.2.7.
- $K_{\text{carrier_PRS}} = K_{\text{carrier}} + 1$ if the UE is not capable of *parallelPRS-MeasRRC-Inactive-r17* defined in [34] and if $\text{Srxlev} \leq \text{S}_{\text{nonIntraSearchP}}$ or $\text{Squal} \leq \text{S}_{\text{nonIntraSearchQ}}$; where K_{carrier} is defined in clause 4.2.2.4.
- $N_{\text{RxBeam},i}$ is the scaling factor for UE Rx beam sweeping:
 - $N_{\text{RxBeam},i} = 1$ if positioning frequency layer i is in FR1, and if positioning frequency layer i is in FR2.
 - $N_{\text{RxBeam},i}$ equals to the value as UE reported in *supportedLowerRxBeamSweepingFactor-FR2* if the capability is reported by the UE for the band containing positioning frequency layer i , and LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-Multi-RTT -RequestLocationInformation*.
 - $N_{\text{RxBeam},i}$ equals to 8, otherwise.

$N_{\text{RxTx,TEG},i}$ is the Rx TEG specific scaling factor:

- $N_{RxTx,TEG,i} = 1$ if UE is not configured by LMF with *measureSameDL-PRS-ResourceWithDifferentRxTxTEGs-r17* or *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34].

Otherwise,

- $N_{RxTx,TEG,i} = N_{TEG,i}$, if UE is not capable of measuring same DL PRS resource simultaneously from multiple Rx TEGs, where $N_{TEG,i}$ is the number of Rx TEGs or RxTx TEGs with which UE is requested to measure a PRS resource indicated via *measureSameDL-PRS-ResourceWithDifferentRxTxTEGs-r17* or *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34], and in case 'n0' is indicated, $N_{TEG,i}$ is the maximum number of Rx TEGs with which UE can support to measure the same PRS resource as reported in *NR-UE-TEG-Capability*.
- $N_{RxTx,TEG,i} = \left\lfloor \frac{N_{TEG,i}}{k_{TEG,simul,i}} \right\rfloor$, if UE is capable of measuring same DL PRS resource simultaneously from multiple Rx TEGs, where $k_{TEG,simul,i}$ is the number of Rx TEGs UE can measure simultaneously which is reported via *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul*.
- $L_{available_PRS,i}$ is the time duration of available PRS resources in the positioning frequency layer i , to be measured during $T_{PRS,i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{available_PRS,i}$, only unmuted PRS resources that are not fully overlapped with other higher-priority DL signals/channels are considered.
- $N_{PRS,i}^{slot}$ is the maximum number of DL PRS resources of positioning frequency layer i configured in a slot,
- $\{N, T\}$ is UE capability combination per band where N is a duration of DL PRS symbols in ms corresponding to *durationOfPRS-ProcessingSymbols-r17* in TS 37.355 [34] processed every T ms corresponding to *durationOfPRS-ProcessingSymbolsInEveryTms-r17* in TS 37.355 [34] for a given maximum bandwidth supported by UE corresponding to *supportedBandwidthPRS* in clause 4.2.7.2 of TS 37.355 [34],
- N' is UE capability for number of DL PRS resources that it can process in a slot corresponding to *maxNumOfDL-PRS-ResProcessedPerSlot-RRC-Inactive-r17* as specified in clause 6.4.3 of TS 37.355 [34],
- N_{sample} is the number of UE Rx-Tx time difference measurement samples:
 - $N_{sample} = 4$ if the UE is not capable of *supportedDL-PRS-ProcessingSamples-RRC-Inactive* defined in [34] or not configured to perform positioning measurements with reduced number of samples by *reducedDL-PRS-ProcessingSamples-r17* [34].
 - $N_{sample} = 1$ if the UE is capable of *supportedDL-PRS-ProcessingSamples-RRC-Inactive* defined in [34] and LMF requests the UE to perform positioning measurements with reduced number of samples by *reducedDL-PRS-ProcessingSamples-r17* [34] and the following conditions are met:
 - PRS bandwidth is within the initial BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
 - $N_{sample} = 2$ if the UE is capable of *supportedDL-PRS-ProcessingSamples-RRC-Inactive* defined in [34] and the LMF requests the UE to perform positioning measurements with reduced number of samples by *reducedDL-PRS-ProcessingSamples-r17* [34] but the following conditions are not met:
 - PRS bandwidth is within the initial BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
- $T_{last,i}$ is the measurement duration for the last UE Rx-Tx time difference measurement sample in the positioning layer i , including the sampling time and processing time, $T_{last,i} = T_i + T_{available_PRS,i}$,
- $T_{effect,i}$ is periodicity of UE Rx-Tx time difference measurement in positioning frequency layer i :

$$T_{effect,i} = \left\lceil \frac{T_i}{T_{available_PRS,i}} \right\rceil * T_{available_PRS,i}$$

Where:

- T_i corresponds to *durationOfPRS-ProcessingSymbolsInEveryTms-r17* in TS 37.355 [34],
- $T_{available_PRS,i} = LCM(T_{PRS,i}, T_{DRX})$, the least common multiple between $T_{PRS,i}$ and T_{DRX} .
- T_{DRX} is the DRX cycle of the UE in the serving cell.
- $T_{PRS,i}$ is the PRS resource periodicity in positioning frequency layer i . If the positioning frequency layer i has more than one DL PRS resource sets with different PRS periodicities with muting, $T_{per}^{PRS\ with\ muting} = N_{muting} * T_{per}^{PRS}$, the least common multiple of $T_{per}^{PRS\ with\ muting}$ among DL PRS resource sets is used to derive $T_{PRS,i}$, where:
 - T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*.
 - N_{muting} is the scaling factor considering PRS resource muting. $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$

The time $T_{UERxTx,Total}$ starts from the first DRX cycle containing the DL PRS resources in the assistance data after both the *NR-Multi-RTT-RequestLocationInformation* message and *NR-Multi-RTT-ProvideAssistanceData* message from LMF via LPP [34] are delivered to the physical layer of UE.

Note: No per-positioning frequency layer requirement is applied in scenarios when multiple positioning frequency layers are configured.

If the RRC state transition occurs from RRC_INACTIVE to RRC_CONNECTED state during the UE Rx-Tx time difference measurement period then the UE shall restart the UE Rx-Tx time difference measurement after it obtains SRS configuration and Timing Advance command from the serving cell.

If cell reselection occurs during the UE Rx-Tx time difference measurement period then the UE shall restart the UE Rx-Tx time difference measurement after it obtains SRS configuration and Timing Advance command from the new serving cell.

The measurement requirements do not apply for a PRS resource:

- if the PRS resource is across two sampling duration of N within duration $L_{available_PRS,i}$ or
- if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N .

If the DRX cycle is reconfigured during the UE Rx-Tx time difference measurement period then the UE Rx-Tx time difference measurement period can be longer.

If during UE Rx-Tx time difference measurement period PRS resources overlap with other DL signals/channels then the UE Rx-Tx time difference measurement period can be longer.

When PRS-RSRP is configured for multi-RTT, the UE Rx-Tx time difference measurements and PRS-RSRP measurements are performed over the same measurement period.

The requirements in clause 5.6.4 do not apply if the PRS configuration given by higher layer parameters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-Multi-RTT-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

If UE uplink transmission timing changes due to the network-configured Timing Advance command during the UE Rx-Tx measurement period, then the UE Rx-Tx time difference measurement period is restarted after uplink transmission timing changes, and the UE Rx-Tx time difference measurement period requirements in this clause shall not apply.

If UE uplink transmission timing changes due to the change in the N_{TA_offset} defined in Table 7.1.2-2 during the UE Rx-Tx measurement period, then the UE Rx-Tx time difference measurement period is restarted after uplink transmission timing changes, and the UE Rx-Tx time difference measurement period requirements in this clause shall not apply.

5.6.5 PRS-RSRPP measurements

5.6.5.1 Introduction

The requirements in clause 5.6.5 shall apply provided the UE has received a message from LMF via LPP requesting the UE to measure and report PRS-RSRPP measurements defined in TS 38.215 [4]. And the UE is capable of supporting the PRS-RSRPP measurement in RRC_INACTIVE state.

5.6.5.2 Requirements Applicability

The requirements in clause 5.6.5 apply for periodic and triggered PRS-RSRPP measurements, provided:

- PRS-RSRPP related side conditions given in clause 10.1.38.2 are met for a corresponding Band.

5.6.5.3 Measurement Capability

UE PRS-RSRPP measurement capability is as indicated by the UE in *NR-DL-AoD-ProvideCapabilities* according to TS 37.355 [34].

5.6.5.4 Measurement Reporting Requirements

The measurement reporting delay is defined as the time between the moment when the periodic measurement report is triggered and the moment when the UE is ready to transmit the measurement report over the air interface. If the UE supports reporting of NR positioning measurements via SDT, the UE may be able to report the measurements while it remains in RRC_INACTIVE state; otherwise, the UE will transition to RRC_CONNECTED state prior to transmitting the measurement report.

For PRS-RSRPP measurements performed by the UE in RRC_INACTIVE state, the measurement reporting delay excludes all of the following:

- any delay caused by other LPP signalling on the DCCH,
- delay uncertainty introduced when inserting the measurement report in the TTI of the uplink DCCH which is equal to $2 \times TTI_{DCCH}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration,
- any delay caused by no UL resources for UE to send the measurement report,
- any transmission delay needed by SDT,
- the time needed to transition to RRC_CONNECTED state to report the measurements.

The reported PRS-RSRPP measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in clause 10.1.38.3.

The PRS-RSRPP measurement accuracy for all measured PRS resources shall be fulfilled according to the accuracy requirements specified in the clause 10.1.38.2.

5.6.5.5 Measurement Period Requirements

When the physical layer receives *NR-DL-AoD-ProvideAssistanceData* message and *NR-DL-AoD-RequestLocationInformation* message in RRC_INACTIVE state, measurement period requirements for PRS-RSRP defined in 5.6.3 is re-used for PRS-RSRPP measurement.

5.6.6 TA validation requirements for positioning SRS

5.6.6.1 Introduction

The requirements in clause 5.6.6 shall apply when the UE is configured with the SRS transmission on the PCell and with *inactivePosSRS-RSRP-ChangeThreshold* for the time alignment (TA) validation before the SRS transmission [2].

5.6.6.2 TA validation requirements

When *inactivePosSRS-RSRP-ChangeThreshold* [2] is configured for TA validation based on the RSRP change criterion according to clause 5.26.2 in [7], the UE is allowed to transmit the SRS using the timing derived using the latest available N_{TA} value as specified in subclause 7.1 provided that the following conditions are met:

- the first RSRP ($RSRP_1$) measurement and the second RSRP ($RSRP_2$) measurements used in the TA validation are valid measurements and,
- TA for the SRS transmission is valid according to the TA validation criteria defined in clause 5.26.2 in [7].

$RSRP_1$ and $RSRP_2$ are considered valid provided that the conditions in Table 5.6.6.2-1 and Table 5.6.6.2-2 are met for FR1 and FR2-1 respectively.

Table 5.6.6.2-1 Valid measurement for FR1

Measurement	FR1
$RSRP_1$	$(T1 - \min(640\text{ms}, M1 \cdot T_{DRX})) \leq T1' \leq (T1 + \min(640\text{ms}, M1 \cdot T_{DRX}))$
$RSRP_2$	$(T2 - \min(640\text{ms}, M1 \cdot T_{DRX})) \leq T2' \leq T2$

Table 5.6.6.2-2 Valid measurement for FR2-1

Measurement	FR2-1
$RSRP_1$	$(T1 - \max(480\text{ms}, 8 \cdot \text{SMTC periodicity})) \leq T1' \leq (T1 + \max(480\text{ms}, 8 \cdot \text{SMTC periodicity}))$
$RSRP_2$	$(T2 - \max(480\text{ms}, 8 \cdot \text{SMTC periodicity})) \leq T2' \leq T2$

If at least one of $RSRP_1$ and $RSRP_2$ is invalid based on the above conditions, then the UE shall not validate the SRS transmission using $RSRP_1$ and $RSRP_2$ and shall not transmit the SRS. The UE shall not transmit in an SRS resource that occurs more than 640 ms after T2.

Where:

- T1 is the time when:
 - *RRCRelease* with *SRS-PosRRC-InactiveConfig* [2] is received by the UE, or
 - the latest TA is received by the UE while in RRC_INACTIVE state.
- T1' is the time when the UE has completed $RSRP_1$.
- T2 is the time when the UE performs TA validation as defined in clause 5.26.2 in [7] for the SRS transmission.
- T2' is the time when the UE has completed $RSRP_2$.
- T_{DRX} is the DRX cycle length in ms.
- M1 the scaling factor as defined in clause 4.2.2.2.

5.7 Random access based Small Data Transmissions (RA-SDT)

5.7.1 Introduction

The requirements in this clause are applicable for the UE performing small data transmissions using 2-step RA or 4-step RA procedures [3].

5.7.2 Requirements for small data transmissions based on 2-step RA

The requirements in clause 6.2.2.3 shall apply.

5.7.3 Requirements for small data transmissions based on 4-step RA

The requirements in clause 6.2.2.2 shall apply.

5.7.4 Applicability conditions for SDT

The UE is not required to meet the following measurement requirements during subsequent SDT transmissions:

- Measurements of inter-frequency NR cells in clause 5.1.2.4
- Measurements of inter-RAT E-UTRAN cells in clause 5.1.2.5
- Idle Mode CA/DC Measurements in clause 5.4

The UE is allowed to delay the reception of PRS resources on the positioning frequency layer until the SDT session is completed if the measurement using PRS resource overlaps with the SDT resources.

5.7B Random access based Small Data Transmissions (RA-SDT) for RedCap

5.7B.1 Introduction

The requirements in this clause are applicable for the UE performing small data transmissions 1 Rx RedCap and 2 Rx RedCap UE using 2-step RA or 4-step RA procedures [3].

The 1 Rx RedCap UE for determining whether to perform SDT procedure defined in clause 5.27 [7] applies:

- sdt-RSRP-Threshold-r17 as the signaled value of sdt-RSRP-Threshold-r17 [2] + 1 dB.

5.7B.2 Requirements for small data transmissions based on 2-step RA

The requirements in clause 6.2.2.3 shall apply.

5.7B.3 Requirements for small data transmissions based on 4-step RA

The requirements in clause 6.2.2.2 shall apply.

5.7B.4 Applicability conditions for RA-SDT for RedCap

The UE is not required to meet the following measurement requirements during SDT transmissions:

- Measurements of inter-frequency NR cells in clause 5.1B.2.4
- Measurements of inter-RAT E-UTRAN cells in clause 5.1B.2.5

6 RRC_CONNECTED state mobility

6.1 Handover

6.1.1 NR Handover

6.1.1.1 Introduction

The purpose of NR handover is to change the NR PCell to another NR cell. The requirements in this clause are applicable to SA NR, NE-DC and NR-DC.

6.1.1.2 NR FR1 - NR FR1 Handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR FR1 cell to NR FR1 cell, and to inter-frequency handover from NR FR1 cell in a carrier frequency with CCA to NR FR1 cell.

6.1.1.2.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{handover} msec from the end of the last TTI containing the RRC command.

Where:

D_{handover} equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1.1.2.2.

6.1.1.2.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{\text{interrupt}}$

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{\text{search}} = 0$ ms. If the target cell is an unknown intra-frequency cell and the target cell $E_s/I_{\text{ot}} \geq -2$ dB, then $T_{\text{search}} = T_{\text{rs}}$ ms. If the target cell is an unknown inter-frequency cell and the target cell $E_s/I_{\text{ot}} \geq -2$ dB, then $T_{\text{search}} = 3 * T_{\text{rs}}$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{\text{rs}}$ for both known and unknown target cell.

$T_{\text{processing}}$ is time for UE processing. $T_{\text{processing}}$ can be up to 20ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the `measObjectNR` having the same SSB frequency and subcarrier spacing. If the `measObjectNR`s having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, T_{rs} is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{\text{rs}}=5\text{ms}$ assuming the SSB transmission periodicity is

5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Clause 9.2.5 for intra-frequency handover and Clause 9.3.4 for inter-frequency handover.

6.1.1.3 NR FR2- NR FR1 Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR2 cell to NR FR1 cell.

6.1.1.3.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ ms from the end of the last TTI containing the RRC command.

Where:

$D_{handover}$ equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1.1.3.2.

6.1.1.3.2 Interruption time

The interruption time is the time between the end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{search} = 0$ ms. If the target cell is an unknown inter-frequency cell and the target cell $E_s/I_{ot} \geq -2$ dB, then $T_{search} = 3 * T_{rs}$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{rs}$ for both known and unknown target cell.

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 40ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing. If such *measObjectNRs* configured by MN and SN have different SMTC, T_{rs} is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{rs}=5$ ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Clause 9.2.5 for intra-frequency handover and Clause 9.3.4 for inter-frequency handover.

6.1.1.4 NR FR2- NR FR2 Handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR FR2 cell to NR FR2 cell.

6.1.1.4.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{handover} ms from the end of the last TTI containing the RRC command.

Where:

D_{handover} equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1.1.4.2.

6.1.1.4.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{\text{interrupt}}$

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the handover command is received by the UE. If the target cell is a known cell, then $T_{\text{search}} = 0$ ms. If the target cell is an unknown intra-frequency cell and the target cell $E_s/I_{\text{ot}} \geq -2$ dB, then $T_{\text{search}} = N * T_{\text{rs}}$ ms. If the target cell is an unknown inter-frequency cell and the target cell $E_s/I_{\text{ot}} \geq -2$ dB, then $T_{\text{search}} = N * 3 * T_{\text{rs}}$ ms. $N = 8$ when the target cell is in FR2-1, and $N = 12$ when the target cell is in FR2-2. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

$T_{\text{processing}}$ is time for UE processing. $T_{\text{processing}}$ can be up to 20ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{\text{rs}}$ for both known and unknown target cell.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If such measObjectNRs configured by MN and SN have different SMTC, T_{rs} is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{\text{rs}}=5\text{ms}$ assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc1* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

In FR2, the target cell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the handover command:
 - the UE has sent a valid measurement report for the target cell and
 - One of the SSBs measured from the NR target cell being configured remains detectable according to the cell identification conditions specified in clause 9.2 for intra-frequency cell and in clause 9.3 for inter-frequency cell,

- One of the SSBs measured from the target cell also remains detectable during the handover delay according to the cell identification conditions specified in clause 9.2 for intra-frequency cell and in clause 9.3 for inter-frequency cell.

otherwise it is unknown.

6.1.1.5 NR FR1- NR FR2 Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR1 cell to NR FR2 cell.

6.1.1.5.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{handover} ms from the end of the last TTI containing the RRC command.

Where:

D_{handover} equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1.1.5.2.

6.1.1.5.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When in inter-frequency handover is commanded, the interruption time shall be less than $T_{\text{interrupt}}$

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the handover command is received by the UE. If the target cell is a known cell, then $T_{\text{search}} = 0$ ms. If the target cell is an unknown inter-frequency cell and the target cell $E_s/I_{\text{ot}} \geq -2$ dB, then $T_{\text{search}} = N \cdot 3 \cdot T_{\text{rs}}$ ms. $N = 8$ when the target cell is in FR2-1, and $N = 12$ when the target cell is in FR2-2. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

$T_{\text{processing}}$ is time for UE processing. $T_{\text{processing}}$ can be up to 40ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{\text{rs}}$ for both known and unknown target cell.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If such measObjectNRs configured by MN and SN have different SMTC, T_{rs} is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{\text{rs}}=5\text{ms}$ assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms.

In FR2, the target cell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the handover command:
 - the UE has sent a valid measurement report for the target cell and
 - One of the SSBs measured from the NR target cell being configured remains detectable according to the cell identification conditions specified in clause 9.3,

- One of the SSBs measured from the target cell also remains detectable during the handover delay according to the cell identification conditions specified in clause 9.3.

otherwise it is unknown.

6.1.2 NR Handover to other RATs

6.1.2.1 NR – E-UTRAN Handover

6.1.2.1.1 Introduction

The purpose of inter-RAT handover from NR to E-UTRAN is to change the radio access mode of PCell from NR to E-UTRAN. The handover procedure is initiated from NR with a RRC message that implies a handover as described in TS 38.331 [2]. The requirements in this clause are applicable to SA NR, NE-DC and NR-DC, and to handover from SA NR cell in a carrier frequency with CCA to E-UTRAN.

6.1.2.1.2 Handover delay

When the UE receives a RRC message implying handover to E-UTRAN the UE shall be ready to start the transmission of the uplink PRACH channel in E-UTRA within D_{handover} ms from the end of the last TTI containing the RRC command. D_{handover} is defined as

$$D_{\text{handover}} = T_{\text{RRC_procedure_delay}} + T_{\text{interrupt}}$$

Where:

$T_{\text{RRC_procedure_delay}}$: it is the RRC procedure delay, which is 50ms

$T_{\text{interrupt}}$: it is the time between end of the last TTI containing the RRC command on the NR PDSCH and the time the UE starts transmission of the PRACH in E-UTRAN, excluding $T_{\text{RRC_procedure_delay}}$. $T_{\text{interrupt}}$ is defined in clause 6.1.2.1.3.

6.1.2.1.3 Interruption time

When the inter-RAT handover to E-UTRAN is commanded, the interruption time shall be less than $T_{\text{interrupt}}$

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + 20 \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{\text{search}} = 0$ ms. If the target cell is unknown and signal quality is sufficient for successful cell detection on the first attempt, then $T_{\text{search}} = 80$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to 30 ms. If PRACH occasion is configured in radio frames with even SFN and the relative time difference between radio frame i in the current cell and the target cell is larger than or equal to $153600 \cdot T_s$, the UE is allowed an additional MIB reception delay of [50]ms.

NOTE: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant E-UTRAN cell identification requirements are described in clause 9.4.1.

6.1.2.2 NR – UTRAN Handover

6.1.2.2.1 Introduction

The purpose of inter-RAT handover from NR to UTRAN is to change the radio access mode from NR to UTRAN. The handover procedure is initiated from NR with a RRC message that implies a hard handover as described in TS 38.331 [2].

6.1.2.2.2 Handover delay

When the UE receives a RRC message implying handover to UTRAN the UE shall be ready to start the transmission of the new UTRA uplink DPCH within D_{handover} ms from the end of the last NR TTI containing the RRC *MobilityfromNRCommand* command.

where:

- D_{handover} equals the RRC procedure delay, which is 50 ms plus the interruption time stated in clause 6.1.2.2.3.

6.1.2.2.3 Interruption time

The interruption time is the time between the end of the last TTI containing the RRC command on the NR PDSCH and the time the UE starts transmission on the uplink DPCH in UTRAN, excluding the RRC procedure delay. The interruption time depends on whether the target cell is known to the UE or not.

The target cell is known if it has been measured by the UE during the last 5 seconds otherwise it is unknown. The UE shall always perform a UTRA synchronisation procedure as part of the handover procedure.

If the target cell is known the interruption time shall be less than $T_{\text{interrupt1}}$

$$T_{\text{interrupt1}} = T_{\text{IU}} + T_{\text{sync}} + 50 + 10 \cdot F_{\text{max}} + T_{\text{MC}} \text{ ms}$$

If the target cell is unknown the interruption time shall be less than $T_{\text{interrupt2}}$

$$T_{\text{interrupt2}} = T_{\text{IU}} + T_{\text{sync}} + 150 + 10 \cdot F_{\text{max}} + T_{\text{MC}} \text{ ms}$$

This requirement shall be met, provided that there is one target cell in the *MobilityfromNRCommand* command. Performance requirements for E-UTRA to UTRA soft handover are not specified. When UE is connected to an NR cell, UTRA SFN timing measurements are not reported. This implies that the timing of the DPCH of the UTRA target cells in the active set cannot be configured by UTRAN to guarantee that all target cells fall within the UE reception window of $T_0 \pm 148$ chips.

Where:

- T_{IU} is the interruption uncertainty when changing the timing from the NR to the new UTRAN cell. T_{IU} can be up to one UTRA frame (10 ms).
- F_{max} denotes the maximum number of radio frames within the transmission time intervals of all transport channels that are multiplexed into the same CCTrCH on the UTRA target cell. If HS-PDSCH is configured in the UTRA target cell, F_{max} is 4 radio frames.
- T_{sync} is the time required for measuring the downlink DPCH channel as stated in TS 25.214 [32], clause 4.3.1.2. In case higher layers indicate the usage of a post-verification period $T_{\text{sync}}=0$ ms. Otherwise $T_{\text{sync}}=40$ ms.
- T_{MC} is 0ms if a single UTRA cell is configured as the handover target, otherwise 20ms if handover to UTRA with 1, 2 or 3 UTRA carriers with secondary HS-PDSCH is configured.

The phase reference is the primary CPICH.

The requirements in this clause assume that N312 has the smallest possible value i.e. only one insync is required.

6.1.3 NR DAPS Handover

6.1.3.1 Introduction

The requirements in this clause are applicable to DAPS handover to change the NR PCell to another NR cell.

Note: requirements only apply if

- the UE indicates ‘no-gap’ via *intraFreq-needForGap* for intra-frequency measurement of source cell and intra-frequency measurement of target cell, or
- the SSB of source cell is completely contained in the active DL BWP of the source cell, and the SSB of target cell is completely contained in the active DL BWP of the target cell, or
- the initial DL and UL BWP of source cell is confined within the active DL and UL BWP of the source cell respectively, and the initial DL and UL BWP of target cell is confined within the active DL and UL BWP of the target cell respectively.

6.1.3.2 NR FR1 - NR FR1 DAPS Handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR FR1 cell to NR FR1 cell. A DAPS handover is intra-frequency if the centre frequency of the SSB of the source cell and the centre frequency of the SSB of the target cell are the same, and the subcarrier spacing of the two SSBs are also the same.

Note: For intra-frequency DAPS handover, no requirement applies if active DL and UL BWP of target cell is not confined within the active DL and UL BWP of the source cell respectively.

Note: For inter-frequency DAPS handover, no requirement applies if the BWP of target cell is overlapped with the BWP of source cell in frequency domain.

An FR1 DAPS handover is synchronous if it meets the conditions in table 6.1.3.2-1, otherwise it is asynchronous

Table 6.1.3.2-1: Sync conditions for FR1 DAPS handover

Type of handover	Maximum receive timing difference between source and target cell (μ s) for sync DAPS handover	Maximum transmit timing difference between source and target cell (μ s) for sync DAPS handover
Intra-frequency ^{Note 1,2,3}	6 μ s	7.6 μ s
Intra-band inter-frequency ^{Note 1,2,3}	6 μ s	7.6 μ s
Inter-band inter-frequency	33 μ s	34.6 μ s
Note 1: For synchronous DAPS handover, if the receive time difference exceeds the cyclic prefix length of that SCS, demodulation performance degradation is expected for the first symbol of the slot. For asynchronous DAPS handover, if the receive time difference exceeds the cyclic prefix length of that SCS, interruptions may occur depending on UE implementation. The duration and frequency of occurrence of such interruptions is not specified. Note 2: For DAPS handover on a TDD band, after starting RACH procedure, a UE is not required to transmit in the uplink to any of source and target cells earlier than N_{RX-TX} after the end of the last received downlink symbol from any of source and target cells in the same TDD band where $N_{RX-TX}=25600T_c$. Note 3: For DAPS handover on a TDD band, after starting RACH procedure, a UE is not required to receive in the downlink from any of source and target cells earlier than N_{TX-RX} after the end of the last transmitted uplink symbol to any of source and target cells in the same TDD band where $N_{TX-RX}=25600T_c$.		

6.1.3.2.1 DAPS handover delay

Procedure delays for the procedure that can command a DAPS handover are specified in TS 38.331 [2].

When the UE receives a RRC message implying handover, the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{\text{handover1}}$ seconds from the end of the last TTI containing the RRC command when UE is configured with dual active protocol stack handover.

$$D_{\text{handover1}} = T_{\text{RRC_procedure}} + T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Where:

$T_{\text{RRC_procedure}}$ is the maximum RRC procedure delay as specified in clause 12 in TS 38.331 [2].

T_{search} , T_{IU} , $T_{\text{processing}}$, T_{Δ} and T_{margin} are defined in clause 6.1.1.2.2.

After successful RACH procedure of the target cell, when the UE receives an RRC message implying source cell release command, the UE shall accomplish the release actions specified in TS 38.331 [2] within $D_{\text{handover2}}$.

$$D_{\text{handover2}} = T_{\text{RRC_procedure}} + T_{\text{interrupt2}}$$

Where:

$T_{\text{RRC_procedure}}$ is the RRC procedure delay as specified in clause 12 in TS 38.331 [2].

$T_{\text{interrupt2}}$ is defined in clause 6.1.3.2.2.

6.1.3.2.2 Interruption time

During $D_{\text{handover1}}$, the UE is allowed an interruption of up to $T_{\text{interrupt1}}$ on source cell.

For FR1-to-FR1 intra-frequency handover, $T_{\text{interrupt1}}$ is specified in Table 6.1.3.2.2-1.

Table 6.1.3.2.2-1: $T_{\text{interrupt1}}$ for FR1-to-FR1 intra-frequency DAPS HO

μ	NR Slot length (ms)	Interruption length $T_{\text{interrupt1}}$ (slots ^{Note 1}), synchronous DAPS HO	Interruption length $T_{\text{interrupt1}}$ (slots ^{Note 1}), asynchronous DAPS HO
0	1	1	2
1	0.5	2	3
2	0.25	4	5
Note 1: The same SCS of source cell and target cell is assumed.			
Note 2: It is assumed that the BWP of target cell is not larger than the BWP of source cell. It is assumed that the CBW of target cell is not larger than the CBW of source cell			
Note 3: Void			

For FR1-to-FR1 intra-band inter-frequency handover, $T_{\text{interrupt1}}$ is specified in Table 6.1.3.2.2-2.

Table 6.1.3.2.2-2: $T_{\text{interrupt1}}$ for FR1-to-FR1 intra-band inter-frequency DAPS HO

μ	NR Slot length (ms)	$T_{\text{interrupt1}}$ (slots ^{Note 1}), synchronous DAPS HO	$T_{\text{interrupt1}}$ (slots ^{Note 1}), asynchronous DAPS HO
0	1	$1 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$	$2 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
1	0.5	$2 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$	$3 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
2	0.25	$4 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$	$5 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
Note 1: The same SCS of source cell and target cell is assumed.			
Note 2: $T_{\text{SMTC_duration}}$ measured in subframes is the longest SMTC duration between source cell and target cell.			
Note 3: Void			
Note 4: $N_{\text{slot}}^{\text{subframe}, \mu}$ is as defined in TS 38.211 [6].			

For FR1-to-FR1 inter-band handover, $T_{\text{interrupt1}}$ is specified in Table 6.1.3.2.2-3.

Table 6.1.3.2.2-3: $T_{\text{interrupt1}}$ for FR1-to-FR1 inter-band DAPS HO

μ	NR Slot length (ms) of source cell	$T_{\text{interrupt1}}$ (slots)	
		Sync	Async
0	1	1	2
1	0.5	2	3
2	0.25	5	5

For FR1-to-FR1 intra-frequency handover, $T_{\text{interrupt2}}$ is specified in Table 6.1.3.2.2-4 when the BWP of target cell is smaller than the BWP of source cell, and $T_{\text{interrupt2}}$ is specified in Table 6.1.3.2.2-5 when the same BWP is used for target cell and source cell.

Table 6.1.3.2.2-4: $T_{\text{interrupt2}}$ for FR1-to-FR1 intra-frequency DAPS HO

μ	NR Slot length (ms)	Interruption length X (slots ^{Note 1})	$T_{\text{interrupt2}}$ (slots ^{Note 1}) for asynchronous DAPS HO
0	1	2	3
1	0.5	4	5
2	0.25	8	9
Note 1: The same SCS of source cell and target cell is assumed.			
Note 2: It is assumed that the BWP of target cell is smaller than the BWP of source cell.			

Table 6.1.3.2.2-5: $T_{\text{interrupt2}}$ for FR1-to-FR1 intra-frequency DAPS HO

μ	NR Slot length (ms)	Interruption length X (slots ^{Note 1})	$T_{\text{interrupt2}}$ (slots ^{Note 1}) for asynchronous DAPS HO
0	1	1	2
1	0.5	2	3
2	0.25	4	5
Note 1: The same SCS of source cell and target cell is assumed.			
Note 2: It is assumed that the BWP of target cell is the same as the BWP of source cell.			
Note 3: Void			

For FR1-to-FR1 intra-band inter-frequency handover, $T_{\text{interrupt2}}$ is specified in Table 6.1.3.2.2-6.

Table 6.1.3.2.2-6: $T_{\text{interrupt2}}$ for FR1-to-FR1 intra-band inter-frequency DAPS HO

μ	NR Slot length (ms)	$T_{\text{interrupt2}}$ (slots ^{Note 1}) for synchronous DAPS HO	$T_{\text{interrupt2}}$ (slots ^{Note 1}) for asynchronous DAPS HO
0	1	$1 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$	$2 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
1	0.5	$2 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$	$3 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
2	0.25	$4 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$	$5 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
Note 1: The same SCS of source cell and target cell is assumed.			
Note 2: $T_{\text{SMTC_duration}}$ measured in subframes is the longest SMTC duration between source cell and target cell.			
Note 3: Void.			
Note 4: $N_{\text{slot}}^{\text{subframe}, \mu}$ is as defined in TS 38.211 [6].			

For FR1-to-FR1 inter-band handover, $T_{\text{interrupt2}}$ is specified in Table 6.1.3.2.2-7.

Table 6.1.3.2.2-7: $T_{\text{interrupt2}}$ for FR1-to-FR1 inter-band DAPS HO

μ	NR slot length (ms) of target cell	$T_{\text{interrupt2}}$ (slots)	
		Sync	Async
0	1	1	2
1	0.5	2	3
2	0.25	5	5

6.1.3.3 NR FR2- NR FR1 DAPS Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR2 cell to NR FR1 cell.

An FR2-FR1 DAPS handover is synchronous if it meets the conditions in table 6.1.3.3-1, otherwise it is asynchronous

Table 6.1.3.3-1: Sync condition for FR2-FR1 DAPS handover

Frequency Range of the pair of carriers	Maximum receive timing difference between source and target cell (μ s) for sync DAPS handover	Maximum transmit timing difference between source and target cell (μ s) for sync DAPS handover
Between FR1 and FR2	25	26.1

6.1.3.3.1 DAPS handover delay

Procedure delays for the procedure that can command a DAPS handover are specified in TS 38.331 [2].

When the UE receives a RRC message implying handover, the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{\text{handover1}}$ ms from the end of the last TTI containing the RRC command when UE is configured with dual active protocol stack handover.

$$D_{\text{handover1}} = T_{\text{RRC_procedure}} + T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Where:

$T_{\text{RRC_procedure}}$ is the maximum RRC procedure delay as specified in clause 12 in TS 38.331 [2].

T_{search} , T_{IU} , $T_{\text{processing}}$, T_{Δ} and T_{margin} are defined in clause 6.1.1.3.2.

After successful RACH procedure of the target cell, when the UE receives an RRC message implying source cell release command, the UE shall accomplish the release actions specified in TS 38.331 [2] within $D_{\text{handover2}}$.

$$D_{\text{handover2}} = T_{\text{RRC_procedure}} + T_{\text{interrupt2}}$$

Where:

$T_{\text{RRC_procedure}}$ is the RRC procedure delay as specified in clause 12 in TS 38.331 [2].

$T_{\text{interrupt2}}$ is defined in clause 6.1.3.3.2.

6.1.3.3.2 Interruption time

During $D_{\text{handover1}}$, the UE is allowed an interruption of up to $T_{\text{interrupt1}}$ on source cell.

For FR2-to-FR1 inter-band handover, $T_{\text{interrupt1}}$ is specified in Table 6.1.3.3.2-1.

Table 6.1.3.3.2-1: $T_{\text{interrupt1}}$ for FR2-to-FR1 inter-band DAPS HO

μ	NR slot length (ms) of source cell	$T_{\text{interrupt1}}$ (slots)	
		Sync	Async
2	0.25	5	5
3	0.125	9	9

During $D_{\text{handover2}}$, the UE is allowed an interruption of up to $T_{\text{interrupt2}}$ on target cell.

For FR2-to-FR1 inter-band handover, $T_{\text{interrupt2}}$ is specified in Table 6.1.3.3.2-2.

Table 6.1.3.3.2-2: $T_{\text{interrupt2}}$ for FR2-to-FR1 inter-band DAPS HO

μ	NR slot length (ms)	$T_{\text{interrupt2}}$ (slots)
-------	---------------------	---------------------------------

	of target cell	Sync	Async
0	1	1	2
1	0.5	2	3
2	0.25	5	5

6.1.3.4 NR FR1- NR FR2 DAPS Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR1 cell to NR FR2 cell.

An FR1-FR2 DAPS handover is synchronous if it meets the conditions in table 6.1.3.4-1, otherwise it is asynchronous

Table 6.1.3.4-1, : Sync condition for FR1-FR2 DAPS handover

Frequency Range of the pair of carriers	Maximum receive timing difference between source and target cell (μ s) for sync DAPS handover	Maximum transmit timing difference between source and target cell (μ s)Note 1 sync DAPS handover
Between FR1 and FR2	25	26.1

6.1.3.4.1 DAPS handover delay

Procedure delays for the procedure that can command a DAPS handover are specified in TS 38.331 [2].

When the UE receives a RRC message implying handover, the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{\text{handover1}}$ ms from the end of the last TTI containing the RRC command when UE is configured with dual active protocol stack handover.

$$D_{\text{handover1}} = T_{\text{RRC_procedure}} + T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Where:

$T_{\text{RRC_procedure}}$ is the maximum RRC procedure delay as specified in clause 12 in TS 38.331 [2].

T_{search} , T_{IU} , $T_{\text{processing}}$, T_{Δ} and T_{margin} are defined in clause 6.1.1.5.2.

After successful RACH procedure of the target cell, when the UE receives an RRC message implying source cell release command, the UE shall accomplish the release actions specified in TS 38.331 [2] within $D_{\text{handover2}}$.

$$D_{\text{handover2}} = T_{\text{RRC_procedure}} + T_{\text{interrupt2}}$$

Where:

$T_{\text{RRC_procedure}}$ is the RRC procedure delay as specified in clause 12 in TS 38.331 [2].

$T_{\text{interrupt2}}$ is defined in clause 6.1.3.4.2.

6.1.3.4.2 Interruption time

During $D_{\text{handover1}}$, the UE is allowed an interruption of up to $T_{\text{interrupt1}}$ on source cell.

For FR1-to-FR2 inter-band handover, $T_{\text{interrupt1}}$ is specified in Table 6.1.3.4.2-1.

Table 6.1.3.4.2-1: $T_{\text{interrupt1}}$ for FR1-to-FR2 inter-band DAPS HO

μ	NR slot length (ms) of source cell	$T_{\text{interrupt1}}$ (slots)	
		Sync	Async
0	1	1	2
1	0.5	2	3
2	0.25	5	5

During $D_{\text{handover}2}$, the UE is allowed an interruption of up to $T_{\text{interrupt}2}$ on target cell.

For FR1-to-FR2 inter-band handover, $T_{\text{interrupt}2}$ is specified in Table 6.1.3.4.2-2.

Table 6.1.3.4.2-2: $T_{\text{interrupt}2}$ for FR1-to-FR2 inter-band DAPS HO

μ	NR slot length (ms) of target cell	$T_{\text{interrupt}2}$ (slots)	
		Sync	Async
2	0.25	5	5
3	0.125	9	9

6.1.4 NR Conditional Handover

6.1.4.1 Introduction

The requirements in this clause are applicable to conditional handover to change the NR PCell to another NR cell.

6.1.4.2 NR FR1 – NR FR1 conditional handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency conditional handover from NR FR1 cell to NR FR1 cell.

6.1.4.2.1 Handover delay

Procedure delays for all procedures that can command a conditional handover are specified in TS 38.331 [2].

When the UE receives a RRC message implying conditional handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{CHO} seconds from the end of the last TTI containing the RRC command.

$$D_{\text{CHO}} = T_{\text{RRC}} + T_{\text{Event_DU}} + T_{\text{measure}} + T_{\text{CHO_execution}} + T_{\text{interrupt}}$$

Where:

T_{RRC} is the RRC procedure delay defined in clause 12 in TS 38.331 [2].

$T_{\text{Event_DU}}$ is the delay uncertainty which is the time from when the UE successfully decodes a conditional handover command until a condition exists at the measurement reference point which will trigger the conditional handover.

T_{measure} is the time for the UE to measure and realize the condition for CHO is fulfilled. T_{measure} equals to the measurements time stated in clause 6.1.4.2.2.

$T_{\text{CHO_execution}}$ is the conditional execution preparation time in clause 6.1.4.2.3.

$T_{\text{interrupt}}$ is the interruption time stated in clause 6.1.4.2.4.

6.1.4.2.2 Measurement time

The measurement time delay is defined from the end of $T_{\text{Event_DU}}$ until UE starts handover execution preparation ($T_{\text{CHO_execution}}$) to a target cell.

For intra-frequency handover, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{\text{identify_intra_with_index}}$ or $T_{\text{identify_intra_without_index}}$ defined in clause 9.2.5.1 or clause 9.2.6.2.

For inter-frequency handover, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{\text{identify_inter_with_index}}$ or $T_{\text{identify_inter_without_index}}$ defined in clause 9.3.4 or clause 9.3.9.

When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{\text{identify_intra_without_index}}$ or $T_{\text{identify_intra_with_index}}$ for intra-frequency handover or $T_{\text{identify_inter_without_index}}$ for inter-frequency handover. If a cell which has been detectable at least for the time period $T_{\text{identify_intra_without_index}}$ or

$T_{\text{identify_intra_with_index}}$ for intra-frequency handover or $T_{\text{identify_inter_without_index}}$ for inter-frequency handover becomes undetectable for a period and then the cell becomes detectable again and triggers a handover, the measurement time delay shall be less than $T_{\text{SSB_measurement_period_intra}}$ or $T_{\text{SSB_measurement_period_inter}}$ provided the timing to that cell has not changed more than $\pm 3200/2^\mu T_c$ while the measurement gap has not been available and the L3 filter has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

6.1.4.2.3 Preparation time

$T_{\text{CHO_execution}}$ is the UE execution preparation time for conditional handover, and starts after UE realizes the condition of CHO is fulfilled and identity of the target cell is determined. $T_{\text{CHO_execution}}$ can be up to 10ms.

6.1.4.2.4 Interruption time

The interruption time is the time between when the UE starts to execute the conditional handover to the target cell and the time the UE starts transmission of the new PRACH.

For intra-frequency or inter-frequency conditional handover, the interruption time shall be less than

$$T_{\text{interrupt}} = T_{\text{processing}} + T_{\text{IU}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Where:

$T_{\text{processing}}$ is time for UE processing. $T_{\text{processing}}$ can be up to 20ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3]

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{\text{rs}}$.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{\text{rs}}=5\text{ms}$ assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

NOTE 1: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

6.1.4.3 NR FR2 – NR FR1 conditional handover

The requirements in this clause are applicable to inter-frequency conditional handover from NR FR2 cell to NR FR1 cell.

The requirements defined in clause 6.1.4.2 applies assuming inter-frequency handover and:

$T_{\text{processing}}$ is time for UE processing. $T_{\text{processing}}$ can be up to 40ms.

6.1.4.4 NR FR2 – NR FR2 conditional handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency conditional handover from NR FR2 cell to NR FR2 cell.

6.1.4.4.1 Handover delay

Procedure delays for all procedures that can command a conditional handover are specified in TS 38.331 [2].

When the UE receives a RRC message implying conditional handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{CHO} seconds from the end of the last TTI containing the RRC command.

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{CHO_execution} + T_{interrupt}$$

Where:

T_{RRC} is the RRC procedure delay defined in clause 12 in TS 38.331 [2].

T_{Event_DU} is the delay uncertainty which is the time from when the UE successfully decodes a conditional handover command until a condition exists at the measurement reference point which will trigger the conditional handover.

$T_{measure}$ is the time for the UE to measure and realize the condition for CHO is fulfilled. $T_{measure}$ equals to the measurements time stated in clause 6.1.4.4.2.

$T_{CHO_execution}$ is the conditional execution preparation time in clause 6.1.4.4.3.

$T_{interrupt}$ is the interruption time stated in clause 6.1.4.4.4.

6.1.4.4.2 Measurement time

The measurement time delay is defined from the end of T_{Event_DU} until UE starts handover execution preparation ($T_{CHO_execution}$) to a target cell.

For intra-frequency handover, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify_intra_with_index}$ or $T_{identify_intra_without_index}$ defined in clause 9.2.5.1 or clause 9.2.6.2.

For inter-frequency handover, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify_inter_with_index}$ or $T_{identify_inter_without_index}$ defined in clause 9.3.4 or clause 9.3.9.

When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency handover or $T_{identify_inter_without_index}$ for inter-frequency handover. If a cell which has been detectable at least for the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency handover or $T_{identify_inter_without_index}$ for inter-frequency handover becomes undetectable for a period and then the cell becomes detectable again and triggers a handover, the measurement time delay shall be less than $T_{SSB_measurement_period_intra}$ or $T_{SSB_measurement_period_inter}$ provided the timing to that cell has not changed more than $\pm 3200/2^\mu T_c$ while the measurement gap has not been available and the L3 filter has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

6.1.4.4.3 Preparation time

$T_{CHO_execution}$ is the UE execution preparation time for conditional handover, and starts after UE realizes the condition of CHO is fulfilled and identity of the target cell is determined. $T_{CHO_execution}$ can be up to 10ms.

6.1.4.4.4 Interruption time

The interruption time is the time between when the UE starts to execute the conditional handover to the target cell and the time the UE starts transmission of the new PRACH.

For intra-frequency or inter-frequency conditional handover, the interruption time shall be less than

$$T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3]

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{rs}$.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{rs}=5ms$ assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

NOTE 1: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

6.1.4.5 NR FR1 – NR FR2 conditional handover

The requirements in this clause are applicable to inter-frequency conditional handover from NR FR1 cell to NR FR2 cell.

The requirements defined in clause 6.1.4.4 applies assuming inter-frequency handover and:

$T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 40ms.

6.1.5 NR Handover with PSCell

6.1.5.1 Introduction

The purpose of NR handover with PSCell is to change the NR PCell to another NR cell or E-UTRA cell and add or change the PSCell along with PCell handover. The requirements in this clause are applicable to:

- Handover with PSCell from NR SA to EN-DC
- Handover with PSCell from NR-DC to NR-DC
 - Requirements in this clause only applies to FR1+FR2 NR-DC
- Handover with PSCell from NE-DC to NE-DC
 - Requirements in this clause only applies to NE-DC with FR1 PCell

6.1.5.2 Handover with PSCell from NR SA to EN-DC

The requirements in this clause are applicable to inter-RAT handover from NR to E-UTRAN and FR1/FR2 PSCell addition.

When the UE receives a RRC message implying handover with PSCell, the UE shall be ready to start the transmission of the new uplink PRACH channel on target E-UTRA PCell within $D_{HOwithPSCell_PCell}$ msec from the end of the last TTI containing the RRC command, and the UE shall be ready to start the transmission of the new uplink PRACH channel on target PSCell within $D_{HOwithPSCell_PSCell}$ msec from the end of the last TTI containing the RRC command.

Where:

- $D_{HOwithPSCell_PCell}$ equals the applicable RRC procedure delay (i.e., 50ms) plus the interruption time stated in clause 6.1.5.2.1.
- $D_{HOwithPSCell_PSCell}$ equals the PSCell addition delay stated in clause 6.1.5.2.2.

6.1.5.2.1 Interruption time for inter-RAT HO from NR to E-UTRAN

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay

When handover with PSCell from NR SA to EN-DC is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{\text{interrupt}} = T_{\text{search_HO}} + T_{\text{IU}} + T_{\text{processing}}$$

Where:

- $T_{\text{search_HO}}$ is same as the T_{search} defined in section 6.1.2.1.3.
- T_{IU} is same as the one defined in section 6.1.2.1.3.
- $T_{\text{processing}}$ is the SW processing time needed by UE, including RF warm up period. When target PSCell is unknown and SMTC configuration of target unknown PSCell is present in *RRCConnectionReconfiguration* [2], $T_{\text{processing}} = 30\text{ms}$ if new PSCell is in FR1, $T_{\text{processing}} = 50\text{ms}$ if new PSCell is in FR2; otherwise, $T_{\text{processing}} = 25\text{ms}$ if new PSCell is in FR1, $T_{\text{processing}} = 45\text{ms}$ if new PSCell is in FR2.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant E-UTRA cell identification requirements are described in clause 9.4.1.

6.1.5.2.2 PSCell addition in HO with PSCell for NR SA to EN-DC

The requirements in this section shall apply for PSCell addition during handover with PSCell from NR SA to EN-DC.

When handover with PSCell from NR SA to EN-DC is commanded, the PSCell addition time shall be less than $D_{\text{HOwithPSCell_PSCell}}$:

- $D_{\text{HOwithPSCell_PSCell}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search_PCell}} + T_{\text{search_PSCell}} + T_{\Delta} + T_{\text{PSCell_DU}} + 2 \text{ ms}$

Where:

- $T_{\text{RRC_delay}}$ is the RRC procedure delay. $T_{\text{RRC_delay}} = 50\text{ms}$.
- $T_{\text{processing}}$ is as defined in section 6.1.5.2.1.
- $T_{\text{search_PCell}}$ is the time for obtaining the timing reference of target PCell. $T_{\text{search_PCell}} = T_{\text{search_HO}}$ which is as defined in section 6.1.5.2.1 if target PSCell is unknown and SMTC configuration of target unknown PSCell is configured in *RRCConnectionReconfiguration* of *targetRAT-MessageContainer* [2]. Otherwise, $T_{\text{search_PCell}} = 0$.
- $T_{\text{search_PSCell}}$ is same as T_{search} in section 7.31.2 of TS36.133[15], and T_{Δ} and $T_{\text{PSCell_DU}}$ is same as the one defined in section 7.31.2 of TS36.133[15]. The T_{rs} definition from section 7.31.2 of TS36.133[15] is modified as following for requirement in this section:
- T_{rs} is the SMTC periodicity of the target NR cell if target PSCell is unknown and SMTC configuration of target unknown PSCell is present in *RRCConnectionReconfiguration* [2], otherwise T_{rs} is the SMTC configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this section is applied with $T_{\text{rs}} = 5 \text{ ms}$ assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

PSCell known and unknown condition is as defined in section 7.31.2 of TS36.133[15].

6.1.5.3 HO with PSCell from NE-DC to NE-DC

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR PCell to NR PCell on FR1, and the PSCell addition is on LTE.

6.1.5.3.1 Handover delay

When the UE receives a RRC message implying PCell handover with PSCell change, the UE shall be ready to start the transmission of the new uplink PRACH channel on target NR PCell within $D_{\text{HOwithPSCell_PSCell}}$ from the end of the last TTI containing the RRC command, and UE shall be ready to start the transmission of the new uplink PRACH channel on target E-UTRA PSCell within $D_{\text{HOwithPSCell_PSCell}}$ from the end of the last TTI containing the RRC command.

The PCell handover delay, $D_{\text{HOwithPSCell_PCell}}$, equals to the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the PCell interruption time ($T_{\text{interrupt}}$) define in clause 6.1.5.3.2.

PSCell addition/change delay, $D_{\text{HOwithPSCell_PSCell}}$ is defined in clause 6.1.5.3.3.

6.1.5.3.2 HO with PSCell - PCell Interruption time

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{\text{interrupt}}$

$$T_{\text{interrupt}} = T_{\text{search_PCell}} + T_{\Delta_PCell} + T_{\text{margin_PCell}} + T_{\text{IU_PCell}} + T_{\text{processing}} \text{ ms}$$

Where:

- If the source cell is in FR1 and target cell is in FR1, $T_{\text{search_PCell}}$, T_{Δ_PCell} , $T_{\text{margin_PCell}}$ is same as the T_{search} , T_{Δ} , T_{margin} defined in section 6.1.1.2.2 respectively.
- $T_{\text{processing}}$ is UE software processing and RF warmup delay for PCell HO and for this case $T_{\text{processing}}$ can be up to 25ms.
- $T_{\text{IU_PCell}}$ can be up to the summation of SSB to PRACH occasion association period and 10 ms if there is no collision between PCell RACH and PSCell RACH occasion or UE can perform PCell RACH and PSCell RACH occasion simultaneously as defined in TS38.213[39] section 7.6.1A; otherwise, longer $T_{\text{IU_PCell}}$ is expected to include the uncertainty in acquiring the next available RACH occasion for PCell RACH transmission.

6.1.5.3.3 PSCell addition/change in NE-DC to NE-DC HO with PSCell

When HO with PSCell addition is commanded, the PSCell addition/change time shall be less than $D_{\text{HOwithPSCell_PSCell}}$.

- $D_{\text{HOwithPSCell_PSCell}} = T_{\text{config_EUTRAN-PSCell}} + T_{\text{processing_margin}}$.

where

- $T_{\text{config_EUTRAN-PSCell}}$ is defined in clause 8.8.2, and
- $T_{\text{processing_margin}} = 5\text{ms}$ is the additional delay margin for RF warm-up and software processing in handover with PSCell.

6.1.5.4 HO with PSCell from NR-DC to NR-DC

The requirements in this clause are applicable to handover with PSCell from NR-DC to NR-DC. The requirements in this clause are only applicable to FR1+FR2 NR-DC.

This clause defines requirements for the delay within which the UE shall be able to handover from NR cell to NR cell and change NR PSCell in the meantime.

When the UE receives a RRC message implying handover with PSCell,

- The UE shall be ready to start the transmission of the new uplink PRACH channel of the target PCell within $D_{\text{HOwithPSCell_PCell}}$ ms from the end of the last TTI containing the RRC command, and
- The UE shall be capable of transmitting PRACH preamble towards the target PSCell no later than $D_{\text{HOwithPSCell_PSCell}}$ ms from the end of the last TTI containing the RRC command.

Where:

- $D_{\text{HOwithPSCell_PCell}}$ equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1.5.4.1.
- $D_{\text{HOwithPSCell_PSCell}}$ is the PSCell change delay stated in clause 6.1.5.4.2.

6.1.5.4.1 HO with PSCell – PCell Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When handover with PSCell from NR-DC to NR-DC is commanded, the interruption time shall be less than $T_{\text{interrupt}}$

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Where:

- T_{search} , T_{IU} , T_{Δ} and T_{margin} are the same as defined in clause 6.1.1.2.2.
- $T_{\text{processing}}$ is the SW processing time needed by UE, including RF warm up period. $T_{\text{processing}} = 30$ ms if SMTC of the target unknown PSCell is configured in *targetcellSMTC-SCG-r16* but not configured in *reconfigurationWithSync*. Otherwise, $T_{\text{processing}} = 25$ ms.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Clause 9.2.5 for intra-frequency handover and Clause 9.3.4 for inter-frequency handover.

6.1.5.4.2 HO with PSCell – PSCell change delay

The requirements in this section shall apply for PSCell change during handover with PSCell from NR-DC to NR-DC.

When handover with PSCell from NR-DC to NR-DC is commanded, the PSCell change time shall be less than $D_{\text{HOwithPSCell_PSCell}}$:

$$D_{\text{HOwithPSCell_PSCell}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search_PCell}} + T_{\text{search_PSCell}} + T_{\Delta} + T_{\text{PSCell_DU}} + 2 \text{ ms}$$

Where:

- $T_{\text{RRC_delay}}$, $T_{\text{search_PSCell}}$, T_{Δ} and $T_{\text{PSCell_DU}}$ are the same as defined in clause 8.9.2.
- $T_{\text{processing}}$ is the SW processing time needed by UE, including RF warm up period. $T_{\text{processing}} = 30$ ms if SMTC of the target unknown PSCell is configured in *targetcellSMTC-SCG-r16* but not configured in *reconfigurationWithSync*. Otherwise, $T_{\text{processing}} = 25$ ms.
- $T_{\text{search_PCell}}$ is the time for obtaining the timing reference of target PCell. If SMTC of the target unknown PSCell is configured in *targetcellSMTC-SCG-r16* but not configured in *reconfigurationWithSync*, $T_{\text{search_PCell}} = T_{\text{search}} + T_{\Delta} + T_{\text{margin}}$, where T_{search} , T_{Δ} and T_{margin} are specified in clause 6.1.5.4.1. Otherwise, $T_{\text{search_PCell}} = 0$ ms.

The T_{rs} definition from clause 8.9.2 is modified as following for requirements in this section:

- T_{rs} is the SMTC periodicity of the target NR cell if target PSCell is unknown and SMTC configuration of target unknown PSCell is present in either *targetcellSMTC-SCG-r16* or *reconfigurationWithSync*, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, T_{rs} is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this section is applied with $T_{\text{rs}} = 5$ ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

PSCell known and unknown condition is as defined in clause 8.9.2.

6.1.5.5 Handover with PSCell from NR SA to EN-DC with PSCell using CCA

6.1.5.5.1 Introduction

When the UE receives a RRC message implying handover with PSCell change, the UE shall be ready to start the transmission of the new uplink PRACH channel on target E-UTRA PCell within $D_{\text{HOwithPSCell_PCell}}$ ms from the end of the last TTI containing the RRC command, and UE shall be ready to start the transmission of the new uplink PRACH channel on a target PSCell on a carrier frequency with CCA within $D_{\text{HOwithPSCell_PSCell}}$ seconds and from the end of the last TTI containing the RRC command.

Where:

$D_{\text{HOwithPSCell_PCell}}$ equals the maximum RRC procedure delay defined in clause 11.2 in TS 36.331 [2] plus the interruption time stated in clause 6.1.5.5.2.

$D_{\text{HOwithPSCell_PSCell}}$ is the PSCell addition delay stated in clause 6.1.5.5.3

6.1.5.5.2 NR SA to EN-DC HO with PSCell- NR to E-UTRA HO Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH excluding the RRC procedure delay. This requirement applies when UE is not required to perform any synchronisation procedure before transmitting on the new PRACH or on the new PUSCH.

When Handover with PSCell is commanded, the interruption time shall be less than $T_{\text{interrupt}}$

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} \text{ ms}$$

Where:

T_{search} is same as the T_{search} defined in section 6.1.2.1.3

T_{IU} is same as the one defined in section 6.1.2.1.3.

$T_{\text{processing}}$ is the SW processing time needed by UE, including RF warm up period. When target PSCell is unknown and SMTC configuration of target unknown PSCell is present in *RRCCConnectionReconfiguration* [2], $T_{\text{processing}} = 30\text{ms}$, otherwise, $T_{\text{processing}} = 25 \text{ ms}$.

NOTE: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target E-UTRA cell.

In the interruption requirement, a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds. Otherwise, it is unknown. Relevant E-UTRA cell identification requirements are described in clause 9.4.1.

6.1.5.5.3 NR SA to EN-DC HO with PSCell - NR PSCell Addition Delay requirements

When Handover with PSCell is commanded, the NR PSCell on a carrier frequency with CCA changing delay shall be less than $D_{\text{HOwithPSCell_PSCell}}$:

$$D_{\text{HOwithPSCell_PSCell}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search_PCell}} + T_{\text{search_PSCell}} + T_{\Delta} + T_{\text{IU_PSCell}} + 2 \text{ ms}$$

Where:

$T_{\text{RRC_delay}}$ is maximum RRC procedure delay defined in clause 11.2 in TS 36.331 [2].

$T_{\text{search_PCell}}$ is the time for obtaining the timing reference of target PCell. $T_{\text{search_PCell}}$ is same as $T_{\text{search_HO}}$ as defined in section 6.1.5.2.1, if target PSCell is unknown and SMTC configuration of target unknown PSCell is present in *RRCCConnectionReconfiguration* [2]. Otherwise, $T_{\text{search_PCell}} = 0$

$T_{\text{search_PSCell}}$ is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{\text{search_PSCell}} = 0 \text{ ms}$. If the target cell is

an unknown cell and target cell $E_s/I_{ot} \geq [-2]$ dB, then $T_{\text{search_PSCell}} = (3+L_1) * T_{\text{rs}}$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

L_1 is the number of SMTC occasions not available at the UE during the inter-RAT detection period. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{Δ} is same as T_{Δ} in section 7.31A.2.

$T_{\text{processing}}$ is time for UE processing and is same as defined in 6.1.5.5.2.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2 ms.

$T_{\text{IU_PSCell}}$ is the delay uncertainty due to the random-access procedure when sending PRACH to the new cell. $T_{\text{IU_PSCell}}$ can be up to: $(1+L_3) * T_{\text{SSB,RO}} + 10$ ms; where $T_{\text{SSB,RO}}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [39] and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failures or RACH collision between PCell and PSCell. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [57] and when there are no RACH collisions between PCell and PSCell. When the UE is configured with both the UL BWP with PRACH occasion on the target cell and UL LBT failure detection/recovery, the interruption can be longer.

NOTE 1: The actual value of $T_{\text{IU_PSCell}}$ shall depend upon the PRACH configuration used in the target cell.

NOTE 2: The interruption time extended by L_1 , L_2 , and L_3 parameters, and by the UL LBT failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is specified in TS 38.331 [38].

T_{rs} is the SMTC periodicity of the target NR cell if target PSCell is unknown and SMTC configuration of target unknown PSCell is present in *RRCCONNECTIONRECONFIGURATION* [2], otherwise T_{rs} is the SMTC configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this section is applied with $T_{\text{rs}} = 5$ ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

A cell on a carrier frequency with CCA is known if it has been meeting the relevant cell identification requirement during the last 5 seconds. Otherwise, it is unknown. Relevant cell identification requirements are described in clause 8.1.2.4.21A, and 8.1.2.4.22A.

6.1A Void

6.1A.1 Void

6.1A.1.1 Void

6.1A.1.2 Void

6.1A.1.2.1 Void

6.1A.1.2.2 Void

6.1B Handover to target cell using CCA

6.1B.1 NR Handover

6.1B.1.1 Introduction

The purpose of NR handover to target cell using CCA is to change the NR PCell to a target NR cell in a carrier frequency with CCA. The requirements in this clause are applicable to NR SA.

In the requirements of clause 6.1B.1, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding detection or time tracking period; otherwise the SMTC occasion is considered as available at the UE.

In the requirements of clause 6.1B.1, the term PRACH occasion unavailable for transmission refers to when the PRACH occasion is configured by gNB but not transmitted by the UE during the corresponding period due to UL CCA failure at the UE.

6.1B.1.2 NR FR1 - NR FR1 Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR1 cell to NR FR1 cell in carrier frequencies with CCA, and to both intra-frequency and inter-frequency handovers from NR FR1 cell in carrier frequencies with CCA to NR FR1 cell in carrier frequencies with CCA.

6.1B.1.2.1 Handover delay

When the UE receives an RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{handover} ms from the end of the last TTI containing the RRC command.

Where:

D_{handover} equals the applicable RRC procedure delay to be defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1B.1.2.2.

6.1B.1.2.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{\text{interrupt}}$

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{\text{search}} = 0$ ms. If the target cell is an unknown intra-frequency cell and the target cell $E_s/I_{\text{ot}} \geq -2$ dB, then $T_{\text{search}} = (1+L_1) * T_{\text{rs}}$. If the target cell is an unknown inter-frequency cell and the target cell $E_s/I_{\text{ot}} \geq -2$ dB, then $T_{\text{search}} = (3+L_1') * T_{\text{rs}}$ where L_1 and L_1' are the number of SMTC occasions not available at the UE during the intra-frequency and inter-frequency detection period, respectively. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = (1+L_2) * T_{\text{rs}}$ ms, where L_2 is the number of SMTC occasions not available at the UE during the time tracking period.

$T_{\text{processing}}$ is time for UE processing. $T_{\text{processing}}$ can be up to 20ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{IU} is the interruption uncertainty due to the random access procedure when sending PRACH to the new cell. T_{IU} can be up to: $(1 + L_3) \cdot T_{SSB,RO} + 10$ ms where $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [3] and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33]. When the UE is configured with both the UL BWP with PRACH occasion on the target cell and UL CCA failure detection/recovery, the interruption can be longer.

T_{rs} is the SMTC periodicity of the target NR cell in a carrier frequency with CCA if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{rs}=5$ ms assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms.

NOTE 1: The interruption time considering the potential extensions caused by L_1, L_1', L_2, L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2].

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Clause 9.2A.5 for intra-frequency handover and Clause 9.3A.4 for inter-frequency handover to a carrier frequency with CCA.

6.1B.1.3 NR FR2-2 NR FR2-2 Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR2-2 cell to NR FR2-2 cell in carrier frequencies with CCA, and to both intra-frequency and inter-frequency handovers from NR FR2-2 cell in carrier frequencies with CCA to NR FR2-2 cell in carrier frequencies with CCA.

6.1B.1.3.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ ms from the end of the last TTI containing the RRC command.

Where:

- $D_{handover}$ equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1B.1.3.2.

6.1B.1.3.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

- T_{search} is the time required to search the target cell when the handover command is received by the UE. If the target cell is a known cell, then $T_{search} = 0$ ms. If the target cell is an unknown intra-frequency cell and the target cell $E_s/I_{ot} \geq -2$ dB, then $T_{search} = (1 + L_1) \cdot N \cdot T_{rs}$ ms. If the target cell is an unknown inter-frequency cell and the target cell $E_s/I_{ot} \geq -2$ dB, then $T_{search} = (3 + L_1') \cdot N \cdot T_{rs}$ where L_1 and L_1' are the number of SMTC occasion groups not available at the UE during the intra-frequency and inter-frequency detection period, respectively. An SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. N is equal to 12. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.
- $T_{processing}$ is time for UE processing. $T_{processing}$ can be up to 20ms.
- T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.
- T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = (1 + L_2) \cdot T_{rs}$, where L_2 is the number of SMTC occasions not available at the UE during the time tracking period.

- T_{IU} is the interruption uncertainty due to the random access procedure when sending PRACH to the new cell. T_{IU} can be up to $(1 + L_3) \cdot T_{SSB,RO} + 10\text{ms}$, where $T_{SSB,RO}$ is SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3] and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $L_3 = 0$ for Type 3 channel access procedure as defined in TS 37.213 [33]. $L_3 = 0$ if *ra-ChannelAccess-r17* is not configured in FR2-2.
- T_{IS} is the SMTC periodicity of the target NR cell in a carrier frequency with CCA if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{IS} is the SMTC configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{IS}=5\text{ms}$ assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms.

NOTE 1: The interruption time considering the potential extensions caused by L_1, L_2, L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2].

In FR2-2, the target cell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the handover command:
 - the UE has sent a valid measurement report for the target cell and
 - One of the SSBs measured from the NR target cell being configured remains detectable according to the cell identification conditions specified in Clause 9.2A.5 for intra-frequency handover and Clause 9.3A.4 for inter-frequency handover to a carrier frequency with CCA,
 - One of the SSBs measured from the target cell also remains detectable during the handover delay according to the cell identification conditions specified in Clause 9.2A.5 for intra-frequency handover and Clause 9.3A.4 for inter-frequency handover to a carrier frequency with CCA.

otherwise it is unknown.

6.1B.1.4 NR FR1- NR FR2-2 Handover

The requirements in this clause are applicable to inter-frequency handovers from NR FR1 cell to NR FR2-2 cell in carrier frequencies with CCA.

6.1B.1.4.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{handover} ms from the end of the last TTI containing the RRC command.

Where:

D_{handover} equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1B.1.4.2.

6.1B.1.4.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When in inter-frequency handover is commanded, the interruption time shall be less than $T_{\text{interrupt}}$

$$T_{\text{interrupt}} = T_{\text{search}} + T_{IU} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell when the handover command is received by the UE. If the target cell is a known cell, then $T_{\text{search}} = 0$ ms. If the target cell is an unknown inter-frequency cell and the target cell $E_s/I_{ot} \geq -2$ dB, then $T_{\text{search}} = (3 + L_1) \cdot N \cdot T_{IS}$, where L_1 is the number of SMTC occasion groups not available at the UE during the inter-frequency detection period. An SMTC occasion group consists of N consecutive

SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. N is equal to 12. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

$T_{\text{processing}}$ is time for UE processing. $T_{\text{processing}}$ can be up to 40ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = (1 + L_2) * T_{\text{rs}}$, where L_2 is the number of SMTC occasions not available at the UE during the time tracking period.

T_{IU} is the interruption uncertainty due to the random access procedure when sending PRACH to the new cell. T_{IU} can be up to $(1 + L_3) * T_{\text{SSB,RO}} + 10\text{ms}$, where $T_{\text{SSB,RO}}$ is SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3] and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $L_3 = 0$ for Type 3 channel access procedure as defined in TS 37.213 [33]. $L_3 = 0$ if *ra-ChannelAccess-r17* is not configured in FR2-2.

- T_{rs} is the SMTC periodicity of the target NR cell in a carrier frequency with CCA if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{\text{rs}}=5\text{ms}$ assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms.

NOTE 1: The interruption time considering the potential extensions caused by L_1 , L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2].

In FR2-2, the target cell is known if it has been meeting the following conditions:

During the last 5 seconds before the reception of the handover command:

- the UE has sent a valid measurement report for the target cell and

One of the SSBs measured from the NR target cell being configured remains detectable according to the cell identification conditions specified in Clause 9.2A.5 for intra-frequency handover and Clause 9.3A.4 for inter-frequency handover to a carrier frequency with CCA,

- One of the SSBs measured from the target cell also remains detectable during the handover delay according to the cell identification conditions specified in Clause 9.2A.5 for intra-frequency handover and Clause 9.3A.4 for inter-frequency handover to a carrier frequency with CCA.

otherwise it is unknown.

6.1C Handover for SAN

6.1C.1 NR SAN Handover

6.1C.1.1 Introduction

The purpose of NR SAN handover is to change the NR SAN PCell to another NR SAN cell. The requirements in this clause are applicable to SA NR SAN.

6.1C.1.2 NR SAN FR1 – NR SAN FR1 Handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR SAN FR1 cell to NR SAN FR1 cell. The requirements in this clause apply provided that UE has the valid and applicable

parameters of ephemeris information, common TA, DL and UL Polarization information, K_{offset} , and K_{mac} for target NR SAN cell during D_{handover} , otherwise interruption time may be longer than the requirements in clause 6.1C.1.2.2.

6.1C.1.2.1 Handover delay

When the UE receives a RRC message implying handover to NR SAN cell, the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{handover} msec from the end of the last TTI containing the RRC command.

Where:

- D_{handover} equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1C.1.2.2.

6.1C.1.2.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover to NR SAN cell is commanded, the interruption time shall be less than $T_{\text{interrupt}}$

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Otherwise, no interruption time requirement is applied.

Where:

- T_{search} is the time required to search the target NR SAN cell when the target cell is not already known when the handover command is received by the UE. If the target cell is known, then $T_{\text{search}} = 0$ ms. If the target cell is an unknown intra-frequency cell and the target cell $E_s/I_{\text{ot}} \geq -2$ dB, then $T_{\text{search}} = T_{\text{rs}}$ ms. If the target cell is an unknown inter-frequency cell and the target cell $E_s/I_{\text{ot}} \geq -2$ dB, then $T_{\text{search}} = 3 * T_{\text{rs}}$ ms. Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.
- T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{\text{rs}}$.
- $T_{\text{processing}}$ is time for UE processing. $T_{\text{processing}}$ can be up to 20ms.
- T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.
- T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and [10] ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].
- T_{rs} is the SMTC periodicity of the target NR SAN cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{\text{rs}}=5\text{ms}$ assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

In the interruption requirement a cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown. Relevant cell identification requirements are described in Clause 9.2C.5 for intra-frequency handover and Clause 9.3C.4 for inter-frequency handover.

6.1C.2 NR SAN Conditional Handover

6.1C.2.1 Introduction

The requirements in this clause are applicable to conditional handover to change the NR SAN PCell to another NR SAN cell.

6.1C.2.2 NR SAN FR1 – NR SAN FR1 conditional handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency conditional handover from NR SAN FR1 cell to NR SAN FR1 cell. The requirements in this clause apply provided that UE has the valid and applicable parameters of ephemeris information, common TA, DL and UL Polarization information, K_{offset} , and K_{mac} for target NR SAN cell during D_{CHO} , otherwise the measurement time, preparation time and interruption time may be longer than the requirements in clause 6.1C.2.2.2, 6.1C.2.2.3 and 6.1C.2.2.4.

6.1C.2.2.1 Handover delay

Procedure delays for all procedures that can command a conditional handover are specified in TS 38.331 [2]. UE shall start RRM measurement before the time or distance condition is met, the time/distance condition is defined in clause 5.5.4 in TS 38.331[2]

When the UE receives a RRC message implying conditional handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{CHO} seconds from the end of the last TTI containing the RRC command.

$$D_{\text{CHO}} = T_{\text{RRC}} + T_{\text{Event_DU}} + T_{\text{measure}} + T_{\text{interrupt}} + T_{\text{CHO_execution}}$$

Where:

- T_{RRC} is the RRC procedure delay defined in clause 12 in TS 38.331 [2].
- $T_{\text{Event_DU}}$ is the delay uncertainty which is the time from when the UE successfully decodes a conditional handover command until a condition exists at the measurement reference point which will trigger the conditional handover
- T_{measure} is the measurements time stated in clause 6.1C.2.2.2.
- $T_{\text{CHO_execution}}$ is the UE conditional execution preparation time for conditional handover in clause 6.1C.2.2.3.
- $T_{\text{interrupt}}$ is the interruption time stated in clause 6.1C.2.2.4.

The conditional handover delay requirements are applied if condition T1-2 is later than the end of T_{measure} for time based CHO, or both condition D1-1 and condition D1-2 are fulfilled before the end of T_{measure} for location-based CHO, otherwise no CHO requirement is applied.

6.1C.2.2.2 Measurement time

The measurement time delay is defined from the end of $T_{\text{Event_DU}}$ until UE executes a handover to a target cell and interruption time starts.

For intra-frequency handover, the requirements for identifying a new detectable intra frequency cell measured without Time To Trigger (TTT) and L3 filtering, $T_{\text{identify_intra_with_index}}$ or $T_{\text{identify_intra_without_index}}$, defined in clause 9.2C.5.1 and clause 9.2C.6.1 are used.

For time-based conditional intra-frequency handover:

- If condition T1-1 occurs earlier than the time at the end of $T_{\text{Event_DU}} + T_{\text{identify_intra_with_index}}$ or $T_{\text{Event_DU}} + T_{\text{identify_intra_without_index}}$, then the measurement time delay equal to $T_{\text{identify_intra_with_index}}$ or $T_{\text{identify_intra_without_index}}$ assuming UE only performs the measurements within SMTC window of the target cell.

- If condition T1-1 occurs later than the time at the end of $T_{\text{Event_DU}} + T_{\text{identify_intra_with_index}}$ Or $T_{\text{Event_DU}} + T_{\text{identify_intra_without_index}}$, then the measurement time delay equals to the time from the end of $T_{\text{Event_DU}}$ until condition T1-1.

For location-based conditional intra-frequency handover:

- If both condition D1-1 and condition D1-2 are fulfilled earlier than the time at the end of $T_{\text{Event_DU}} + T_{\text{identify_intra_with_index}}$ Or $T_{\text{Event_DU}} + T_{\text{identify_intra_without_index}}$, then the measurement time delay equal to $T_{\text{identify_intra_with_index}}$ Or $T_{\text{identify_intra_without_index}}$ assuming UE only performs measurements within SMTC window of the target cell.
- If both condition D1-1 and condition D1-2 are fulfilled is later than the time at the end of $T_{\text{Event_DU}} + T_{\text{identify_intra_with_index}}$ Or $T_{\text{Event_DU}} + T_{\text{identify_intra_without_index}}$ for intra-frequency handover, then the measurement time delay equal to the time from the end of $T_{\text{Event_DU}}$ until time when both condition D1-1 and condition D1-2 are fulfilled.

For inter-frequency handover, the requirements for identifying a new detectable inter frequency cell measured without Time To Trigger (TTT) and L3 filtering, $T_{\text{identify_inter_with_index}}$ Or $T_{\text{identify_inter_without_index}}$, defined in clause 9.3C.7.1 are used.

For time-based conditional inter-frequency handover:

- If condition T1-1 occurs earlier than the time at the end of $T_{\text{Event_DU}} + T_{\text{identify_inter_with_index}}$ Or $T_{\text{Event_DU}} + T_{\text{identify_inter_without_index}}$, then the measurement time delay equal to $T_{\text{identify_inter_with_index}}$ Or $T_{\text{identify_inter_without_index}}$ assuming that the UE uses only the SMTC window of the target inter-frequency carrier for performing the measurements. In this case $K_{\text{satellite}}=1$, $\text{CSSF}_{\text{inter}}=1$.
- If condition T1-1 occurs later than the time at the end of $T_{\text{Event_DU}} + T_{\text{identify_inter_with_index}}$ Or $T_{\text{Event_DU}} + T_{\text{identify_inter_without_index}}$, then the measurement time delay equals to the time from the end of $T_{\text{Event_DU}}$ until condition T1-1.

For location-based conditional inter-frequency handover,

- If both condition D1-1 and condition D1-2 are fulfilled earlier than the time at the end of $T_{\text{Event_DU}} + T_{\text{identify_inter_with_index}}$ Or $T_{\text{Event_DU}} + T_{\text{identify_inter_without_index}}$, then the measurement time delay equal to $T_{\text{identify_inter_with_index}}$ Or $T_{\text{identify_inter_without_index}}$, assuming that the UE uses only the SMTC window of the target inter-frequency carrier for performing the measurements. In this case $K_{\text{satellite}}=1$, $\text{CSSF}_{\text{inter}}=1$.
- If both condition D1-1 and condition D1-2 are fulfilled later than the time at the end of $T_{\text{Event_DU}} + T_{\text{identify_inter_with_index}}$ Or $T_{\text{Event_DU}} + T_{\text{identify_inter_without_index}}$, then the measurement time delay equal to the time from the end of $T_{\text{Event_DU}}$ until time of both condition D1-1 and condition D1-2 are fulfilled.

When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $[T_{\text{identify_intra_without_index}}]$ or $[T_{\text{identify_intra_with_index}}]$ for intra-frequency handover or $[T_{\text{identify_inter_without_index}}]$ for inter-frequency handover.

6.1C.2.2.3 Preparation time

$T_{\text{CHO_execution}}$ is the UE execution preparation time for conditional handover, and starts after UE realizes the condition of CHO is met and identity of the target cell is determined. $T_{\text{CHO_execution}}$ can be up to 10ms.

6.1C.2.2.4 Interruption time

The interruption time is the time between when the UE starts to execute the conditional handover to the target cell and the time the UE starts transmission of the new PRACH.

For intra-frequency or inter-frequency conditional handover, the measurement time shall be less than

$$T_{\text{interrupt}} = T_{\text{processing}} + T_{\text{IU}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Where:

- $T_{\text{processing}}$ is time for UE processing. $T_{\text{processing}}$ can be up to 20ms.
- T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and [10] ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3]
- T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{\text{rs}}$.
- T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.
- T_{rs} is the SMTC periodicity of the target NR SAN cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise T_{rs} is the SMTC configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{\text{rs}}=5\text{ms}$ assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

NOTE 1: The actual value of T_{IU} shall depend upon the PRACH configuration used in the target cell.

6.1D Handover for RedCap

6.1D.1 NR Handover

6.1D.1.1 Introduction

The purpose of NR handover is to change the NR PCell to another NR cell for RedCap UE. The requirements in this clause are applicable to SA NR.

Handover for a RedCap UE is defined as intra-frequency handover if the center frequency and subcarrier spacing (SCS) of the reference SSB of the serving cell is same as the center frequency and SCS of the reference SSB of the target cell, where:

- The reference SSB of the serving cell is the SSB in the active DL BWP of serving cell
- The reference SSB of the target cell is the SSB in the first active DL BWP of the target cell upon reconfiguration.

The requirements in this clause apply for the following handover scenarios:

- Handover to a target cell's DL BWP associated with CD-SSB;
- Handover to a target cell's Redcap specific DL BWP associated with NCD-SSB with RACH on the corresponding Redcap specific UL BWP.

6.1D.1.2 NR FR1 - NR FR1 Handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR FR1 cell to NR FR1 cell.

6.1D.1.2.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within D_{handover} msec from the end of the last TTI containing the RRC command.

Where:

D_{handover} equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1D.1.2.2.

6.1D.1.2.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{\text{interrupt}}$

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell which depends on whether the target cell is already known when the handover command is received by the UE.

- If the target cell is a known intra-frequency cell, $T_{\text{search}} = 0\text{ms}$. If the target cell is an unknown intra-frequency cell and the target cell $E_s/I_{\text{ot}} \geq -2$ dB, then $T_{\text{search}} = 1 \cdot T_{\text{rs}}$ ms if UE is capable of 2 Rx antennas; $T_{\text{search}} = 2 \cdot T_{\text{rs}}$ ms if UE is only required to support 1 Rx antenna.
- If the target cell is a known inter-frequency cell, then
 - if the measured SSB is the target SSB for HO of the target cell, $T_{\text{search}} = 0\text{ms}$;
 - if the measured SSB and the target SSB for HO belong to the same NR target cell, $T_{\text{search}} = T_{\text{rs}}$ ms provided one of the following conditions is fulfilled:
 - The measured SSB is the CD-SSB in the DL BWP and the target SSB for HO is the NCD-SSB in RedCap specific DL BWP, or
 - The measured SSB is the NCD-SSB in RedCap specific DL BWP and the target SSB for HO is the CD-SSB in DL BWP, or
 - The measured SSB is the NCD-SSB and the target SSB for HO is the NCD-SSB and both are within different RedCap specific DL BWPs
 - If the target cell is an unknown inter-frequency cell and if the target cell $E_s/I_{\text{ot}} \geq -2$ dB, then $T_{\text{search}} = 3 \cdot T_{\text{rs}}$ ms if the UE is operating with 2 Rx antennas; $T_{\text{search}} = 5 \cdot T_{\text{rs}}$ ms if UE is operating with only 1 Rx antenna.

Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{\text{rs}}$ for both known and unknown target cell.

$T_{\text{processing}}$ is time for UE processing. $T_{\text{processing}}$ can be up to 20ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise,

- T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing as NCD-SSB indicated by nonCellDefiningSSB-r17 if the first active DL BWP included in handover command is configured with nonCellDefiningSSB-r17, otherwise, as CD-SSB indicated by *absoluteFrequencySSB* in *frequencyInfoDL* in handover command.
- If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{\text{rs}}=5\text{ms}$ assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2]

signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

For RedCap UE with HD-FDD, the handover requirements are met provided that

- SSB is available at the UE once every SMTC period during T_{search}
- One SSB is available during T_{Δ}
- One SSB is available during T_{IU} .

In FR1, the target cell is known if it has been meeting the following conditions:

- At least one of the SSBs measured belongs to the same NR target cell,
- During the last 5 seconds before the reception of the handover command:
 - at least one of the SSBs measured which belongs to the same NR target cell remains detectable according to the cell identification requirements as described in clause 9.2B for intra-frequency measurements and clause 9.3B for inter-frequency measurements,
 - The reference SSB of the NR target cell also remains detectable during the handover delay according to the cell identification requirements are described in clause 9.2B for intra-frequency handover and clause 9.3B for inter-frequency handover.

Otherwise, it is unknown.

6.1D.1.3 NR FR2- NR FR2 Handover

The requirements in this clause are applicable to both intra-frequency and inter-frequency handovers from NR FR2 cell to NR FR2 cell.

6.1D.1.3.1 Handover delay

When the UE receives a RRC message implying handover the UE shall be ready to start the transmission of the new uplink PRACH channel within $D_{handover}$ msec from the end of the last TTI containing the RRC command.

Where:

$D_{handover}$ equals the applicable RRC procedure delay defined in clause 12 in TS 38.331 [2] plus the interruption time stated in clause 6.1D.1.3.2.

6.1D.1.3.2 Interruption time

The interruption time is the time between end of the last TTI containing the RRC command on the old PDSCH and the time the UE starts transmission of the new PRACH, excluding the RRC procedure delay.

When intra-frequency or inter-frequency handover is commanded, the interruption time shall be less than $T_{interrupt}$

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Where:

T_{search} is the time required to search the target cell which depends on whether the target cell is already known when the handover command is received by the UE.

- If the target cell is a known intra-frequency cell, $T_{search} = 0$ ms. If the target cell is an unknown intra-frequency cell and the target cell $E_s/I_{ot} \geq -2$ dB, then $T_{search} = N \cdot T_{rs}$ ms, where $N = 8$.
- If the target cell is a known inter-frequency cell, then

if the measured SSB is the target SSB for HO of the target cell, $T_{search} = 0$ ms;

if the measured SSB and the target SSB for HO belong to the same NR target cell, $T_{\text{search}} = T_{\text{rs}}$ ms provided one of the following conditions is fulfilled:

- The measured SSB is the CD-SSB in the DL BWP and the target SSB for HO is the NCD-SSB in RedCap specific DL BWP, or
- The measured SSB is the NCD-SSB in RedCap specific DL BWP and the target SSB for HO is the CD-SSB in DL BWP, or
- The measured SSB is the NCD-SSB and the target SSB for HO is the NCD-SSB and both are within different RedCap specific DL BWPs
- If the target cell is an unknown inter-frequency cell and if the target cell $E_s/I_{\text{ot}} \geq -2$ dB, then $T_{\text{search}} = 3 \cdot N \cdot T_{\text{rs}}$ ms.

Regardless of whether DRX is in use by the UE, T_{search} shall still be based on non-DRX target cell search times.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = T_{\text{rs}}$ for both known and unknown target cell.

$T_{\text{processing}}$ is time for UE processing. $T_{\text{processing}}$ can be up to 20ms.

T_{margin} is time for SSB post-processing. T_{margin} can be up to 2ms.

T_{IU} is the interruption uncertainty in acquiring the first available PRACH occasion in the new cell. T_{IU} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the handover command, otherwise,

- T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing as NCD-SSB indicated by nonCellDefiningSSB-r17 if the first active DL BWP included in handover command is configured with nonCellDefiningSSB-r17, otherwise, as CD-SSB indicated by absoluteFrequencySSB in frequencyInfoDL in handover command.
- If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{\text{rs}}=5\text{ms}$ assuming the SSB transmission periodicity is 5ms. There is no requirement if the SSB transmission periodicity is not 5ms. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the handover command, T_{rs} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

In FR2, the target cell is known if it has been meeting the following conditions:

- At least one of the SSBs measured belongs to the same NR target cell,
- During the last 5 seconds before the reception of the handover command:
 - the UE has sent a valid measurement report for the target cell and
 - at least one of the SSBs measured which belongs to the same NR target cell remains detectable according to the cell identification requirements as described in clause 9.2B for intra-frequency measurements and clause 9.3B for inter-frequency measurements,
- The reference SSB of the NR target cell also remains detectable during the handover delay according to the cell identification requirements are described in clause 9.2B for intra-frequency handover and clause 9.3B for inter-frequency handover.

Otherwise, it is unknown.

6.1D.2 NR Handover to other RATs

6.1D.2.1 NR – E-UTRAN Handover

The purpose of inter-RAT handover from NR to E-UTRAN is to change the radio access mode of PCell from NR to E-UTRAN for RedCap UE. The handover procedure is initiated from NR with a RRC message that implies a handover as described in TS 38.331 [2]. The requirements in this clause are applicable to SA NR.

The requirements in clause 6.1.2.1 shall apply when RedCap UE is capable of 2 Rx. When UE is only required to support 1 Rx antenna, the requirements for category 1bis UE defined in clause 5.1.2 in [15] shall apply.

6.2 RRC Connection Mobility Control

6.2.1 SA: RRC Re-establishment

6.2.1.1 Introduction

This clause contains requirements on the UE regarding RRC connection re-establishment procedure. RRC connection re-establishment is initiated when a UE in RRC_CONNECTED state on the carrier without CCA or on the carrier with CCA loses RRC connection due to any of failure cases, including radio link failure, handover failure, and RRC connection reconfiguration failure. The RRC connection re-establishment procedure is specified in clause 5.3.7 of TS 38.331 [2].

The requirements in this clause are applicable for RRC connection re-establishment to NR cell.

6.2.1.2 Requirements

In RRC_CONNECTED state the UE shall be capable of sending *RRCReestablishmentRequest* message within $T_{\text{re-establish_delay}}$ seconds from the moment it detects a loss in RRC connection. The total RRC connection delay ($T_{\text{re-establish_delay}}$) shall be less than:

$$T_{\text{re-establish_delay}} = T_{\text{UE_re-establish_delay}} + T_{\text{UL_grant}}$$

$T_{\text{UL_grant}}$: It is the time required to acquire and process uplink grant from the target PCell. The uplink grant is required to transmit *RRCReestablishmentRequest* message.

The UE re-establishment delay ($T_{\text{UE_re-establish_delay}}$) is specified in clause 6.2.1.2.1.

6.2.1.2.1 UE Re-establishment delay requirement

The UE re-establishment delay ($T_{\text{UE_re-establish_delay}}$) is the time between the moments when any of the conditions requiring RRC re-establishment as defined in clause 5.3.7 in TS 38.331 [2] is detected by the UE and when the UE sends PRACH to the target PCell. The UE re-establishment delay ($T_{\text{UE_re-establish_delay}}$) requirement shall be less than:

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

The intra-frequency target NR cell shall be considered detectable if each relevant SSB can satisfy that:

- SS-RSRP related side conditions given in clause 10.1.2 and 10.1.3 are fulfilled for a corresponding NR Band for FR1 and FR2, respectively, and
- the conditions of SSB_{RP} and SSB_{Ês}/I_{ot} according to Annex B.2.2 for a corresponding NR Band are fulfilled.

The inter-frequency target NR cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clause 10.1.4 and 10.1.5 are fulfilled for a corresponding NR Band for FR1 and FR2, respectively, and

- the conditions of SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.3 for a corresponding NR Band are fulfilled.

$T_{identify_intra_NR}$: It is the time to identify the target intra-frequency NR cell and it depends on whether the target NR cell is known cell or unknown cell and on the FR of the target NR cell. If the UE is not configured with intra-frequency NR carrier for RRC re-establishment then $T_{identify_intra_NR}=0$; otherwise $T_{identify_intra_NR}$ shall not exceed the values defined in Table 6.2.1.2.1-1 when *highSpeedMeasFlagFR2-r17* is not configured or UE is not capable of FR2 power class 6 and Table 6.2.1.2.1-3 when *highSpeedMeasFlagFR2-r17* is configured and UE is capable of FR2 power class 6.

$T_{identify_inter_NR,i}$: It is the time to identify the target inter-frequency NR cell on inter-frequency carrier *i* configured for RRC re-establishment and it depends on whether the target NR cell is known cell or unknown cell and on the FR of the target NR cell. $T_{identify_inter_NR,i}$ shall not exceed the values defined in Table 6.2.1.2.1-2.

T_{SMTC} : It is the periodicity of the SMTC occasion configured for the intra-frequency carrier. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2*, T_{smtc} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

$T_{SMTC,i}$: It is the periodicity of the SMTC occasion configured for the inter-frequency carrier *i*. If it is not configured, the UE may assume that the target SSB periodicity is no larger than 20 ms.

T_{SI-NR} : It is the time required for receiving all the relevant system information according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [2] for the target NR cell.

T_{PRACH} : It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. T_{PRACH} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

N_{freq} : It is the total number of NR frequencies to be monitored for RRC re-establishment; $N_{freq} = 1$ if the target intra-frequency NR cell is known, else $N_{freq} = 2$ and $T_{identify_intra_NR} = 0$ if the target inter-frequency NR cell is known.

There is no requirement if the target cell does not contain the UE context.

In the requirement defined in the below tables, the target FR1 cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown.

Table 6.2.1.2.1-1: Time to identify target NR cell for RRC connection re-establishment to NR intra-frequency cell

Serving cell SSB $\hat{E}_s/I_{ot}$ (dB)	FR of target NR cell	$T_{identify_intra_NR}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, $5 \times T_{SMTC}$)	MAX (800 ms, $10 \times T_{SMTC}$)
≥ -8	FR2-1	N/A	MAX (1000 ms, $80 \times T_{SMTC}$)
≥ -8	FR2-2	N/A	MAX (1000 ms, $120 \times T_{SMTC}$)
< -8	FR1	N/A	800 ^{Note1}
< -8	FR2-1	N/A	3520 ^{Note1}
< -8	FR2-2	N/A	5280 ^{Note1}
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when $T_{SMTC} > 20$ ms and serving cell SSB $\hat{E}_s/I_{ot} < -8$ dB.			

T Table 6.2.1.2.1-2: Time to identify target NR cell for RRC connection re-establishment to NR inter-frequency cell

Serving cell SSB $\hat{E}_s/I_{ot}$ (dB)	FR of target NR cell	$T_{identify_inter_NR,i}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, $6 \times T_{SMTC,i}$)	MAX (800 ms, $13 \times T_{SMTC,i}$)
≥ -8	FR2-1	N/A	MAX (1000 ms, $104 \times T_{SMTC,i}$)
≥ -8	FR2-2	N/A	MAX (1000 ms, $156 \times T_{SMTC,i}$)
< -8	FR1	N/A	800 ^{Note1}
< -8	FR2-1	N/A	4000 ^{Note1}
< -8	FR2-2	N/A	6000 ^{Note1}
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when $T_{SMTC,i} > 20$ ms and serving cell SSB $\hat{E}_s/I_{ot} < -8$ dB.			

Table 6.2.1.2.1-3: Time to identify target NR cell for RRC connection re-establishment to NR intra-frequency cell when *highSpeedMeasFlagFR2-r17* is configured (Frequency range FR2)

Serving cell SSB $\hat{E}_s/\text{lot}$ (dB)	FR of target NR cell	T _{identify_intra_NR} [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR2	N/A	MAX (1000 ms, 10 x N2 x T _{SMTC})
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when T _{SMTC} > 20 ms and serving cell SSB $\hat{E}_s/\text{lot} < -8$ dB. Note 2: When SMTC ≤ 40 ms, N2=2 when <i>highSpeedMeasFlagFR2-r17</i> = set1; N2=6 when <i>highSpeedMeasFlagFR2-r17</i> = set2.			

6.2.1A RRC Re-establishment with CCA

6.2.1A.1 Introduction

This clause contains requirements on the UE regarding RRC connection re-establishment procedure on the carrier with CCA. RRC connection re-establishment on the carrier with CCA is initiated when a UE in RRC_CONNECTED state on the carrier w/o or with CCA loses RRC connection due to any of failure cases, including radio link failure, handover failure, and RRC connection reconfiguration failure. The RRC connection re-establishment procedure is specified in clause 5.3.7 of TS 38.331 [2].

In the requirements of clause 6.2.1A, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding RRC re-establishment period; otherwise the SMTC occasion is considered as available at the UE.

In the requirements of clause 6.2.1A, the term PRACH occasion unavailable for transmission refers to when the PRACH occasion is configured by gNB but not transmitted by the UE during the corresponding period due to UL CCA failure at the UE; otherwise the PRACH occasion is considered as available for transmission.

The requirements in this clause are applicable for RRC connection re-establishment to NR cell on the carrier with CCA.

When the RRC connection re-establishment is performed on a cell in FR2-2 with shared spectrum channel access, UE shall determine the CCA mode of the neighbour cell according to *channelAccessMode2-r17* if configured. If *channelAccessMode2-r17* of the cell is enabled, UE shall assume that CCA applies to the cell and perform measurement accordingly, and the requirements in clause 6.2.1A shall apply; otherwise, UE shall assume that CCA does not apply to the cell and perform measurement accordingly, and requirements in 6.2.1 shall apply.

6.2.1A.2 Requirements

In RRC_CONNECTED state on the carrier w/o or with CCA the UE shall be capable of sending *RRCReestablishmentRequest* message within T_{re-establish_delay_CCA} seconds from the moment it detects a loss in RRC connection. The total RRC connection delay (T_{re-establish_delay_CCA}) shall be less than:

$$T_{re-establish_delay_CCA} = T_{UE_re-establish_delay_CCA} + T_{UL_grant}$$

T_{UL_grant}: It is the time required to acquire and process uplink grant from the target PCell with CCA. The uplink grant is required to transmit *RRCReestablishmentRequest* message.

The UE re-establishment delay (T_{UE_re-establish_delay_CCA}) is specified in clause 6.2.1A.2.1.

6.2.1A.2.1 UE Re-establishment with CCA delay requirement

The UE re-establishment on the carrier with CCA delay (T_{UE_re-establish_delay_CCA}) is the time between the moments when any of the conditions requiring RRC re-establishment on the carrier with CCA as defined in clause 5.3.7 in TS 38.331 [2] is detected by the UE and when the UE sends PRACH to the target PCell on the carrier with CCA. The UE re-establishment delay requirement (T_{UE_re-establish_delay_CCA}) on the carrier with CCA shall be less than:

$$T_{UE_re-establish_delay_CCA} = 50 \text{ ms} + T_{identify_intra_NR_CCA} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR_CCA,i} + T_{SI-NR_CCA} + T_{PRACH_CCA}$$

The intra-frequency target NR cell with CCA shall be considered detectable if each relevant SSB can satisfy that:

- SS-RSRP related side conditions given in clause 10.1.2 and 10.1.3 are fulfilled for a corresponding NR Band for FR1 and FR2-2, respectively, and
- the conditions of SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.3 for a corresponding NR Band are fulfilled.

The inter-frequency target NR cell on the carrier with CCA shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clause 10.1.4 and 10.1.5 are fulfilled for a corresponding NR Band for FR1 and FR2-2, respectively, and
- the conditions of SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.2 for a corresponding NR Band are fulfilled.

$T_{identify_intra_NR_CCA}$: If the target intra-frequency carrier is the carrier without CCA, it is the time to identify the target intra-frequency NR cell which is defined in clause 6.2.1; otherwise it is the time to identify the target intra-frequency NR cell on the carrier with CCA and it depends on whether the target NR cell on the carrier with CCA is known cell or unknown cell and on the frequency range (FR) of the target NR cell on the carrier with CCA. If the UE is not configured with intra-frequency NR carrier with CCA for RRC re-establishment then $T_{identify_intra_NR_CCA}=0$; otherwise $T_{identify_intra_NR_CCA}$ shall not exceed the values defined in Table 6.2.1A.2.1-1.

$T_{identify_inter_NR_CCA,i}$: If the target inter-frequency carrier is the carrier without CCA, it is the time to identify the target inter-frequency NR cell which is defined in clause 6.2.1; otherwise it is the time to identify the target inter-frequency NR cell on inter-frequency carrier i with CCA configured for RRC re-establishment and it depends on whether the target NR cell on the inter-frequency carrier with CCA is known or unknown. $T_{identify_inter_NR_CCA,i}$ shall not exceed the values defined in Table 6.2.1A.2.1-2.

T_{SMTC} : It is the periodicity of the SMTC occasion configured for the intra-frequency carrier. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2*, T_{smtc} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

$T_{SMTC,i}$: It is the periodicity of the SMTC occasion configured for the inter-frequency carrier i . If it is not configured, the UE may assume that the target SSB periodicity is not larger than 20 ms.

T_{SI-NR_CCA} : It is the time required for receiving all the relevant system information according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [2] for the target NR cell on the carrier with CCA.

T_{PRACH_CCA} is the delay uncertainty in acquiring the first available PRACH occasion in the target NR Cell on the carrier with CCA:

$T_{PRACH_CCA} = (1 + K_3) \cdot T_{SSB,RO} + 10 \text{ ms}$, where:

- $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [39].
- K_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $K_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [57]. $L_3 = 0$ if *ra-ChannelAccess-r17* is not configured in FR2-2.

N_{freq} : It is the total number of NR frequencies to be monitored for RRC re-establishment; $N_{freq} = 1$ if the target NR cell on the intra-frequency carrier with CCA is known, else $N_{freq} = 2$ and $T_{identify_intra_NR_CCA} = 0$ if the target NR cell on the inter-frequency carrier with CCA is known.

There is no requirement if the target cell on the carrier with CCA does not contain the UE context.

In the requirement defined in the below tables, the target FR1 cell on the carrier with CCA is known if it has been meeting the relevant cell identification requirement during the last 8 seconds otherwise it is unknown.

Table 6.2.1A.2.1-1: Time to identify target NR cell for RRC connection re-establishment to NR intra-frequency cell with CCA

Serving cell SSB $\hat{E}_s$ /lot (dB)	Frequency range (FR) of target NR cell	$T_{\text{identify_intra_NR_CCA}}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, $(5+K_1) \times T_{\text{SMTC}}$)	MAX (800 ms, $(10+K_1) \times T_{\text{SMTC}}$)
≥ -8	FR2-2	N/A	MAX (1000 ms, $N \times (10+K_3) \times T_{\text{SMTC}}$)
< -8	FR1	N/A	$(800+20 \times K_1)^{\text{Note1}}$
< -8	FR2-2	N/A	$N \times (440+20 \times K_3)^{\text{Note1}}$
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer with CCA when $T_{\text{SMTC}} > 20$ ms and serving cell SSB $\hat{E}_s$ /lot < -8 dB. Note 2: K_1 is the number of SMTC occasions not available at the UE due during RRC re-establishment period on the carrier with CCA. Note 3: K_3 is the number of SMTC occasion groups not available at the UE during RRC re-establishment period on the carrier with CCA. An SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. N is equal to 12.			

Table 6.2.1A.2.1-2: Time to identify target NR cell for RRC connection re-establishment to NR inter-frequency cell on the carrier with CCA

Serving cell SSB $\hat{E}_s$ /lot (dB)	Frequency range (FR) of target NR cell	$T_{\text{identify_inter_NR_CCA, i}}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, $([6]+K_{2,i}) \times T_{\text{SMTC, i}}$)	MAX (800 ms, $([13]+K_{2,i}) \times T_{\text{SMTC, i}}$)
< -8	FR1	N/A	$(800+20 \times K_{2,i})^{\text{Note1}}$
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer with CCA when $T_{\text{SMTC, i}} > 20$ ms and serving cell SSB $\hat{E}_s$ /lot < -8 dB. Note 2: $K_{2,i}$ is the number of SMTC occasions not available at the UE during RRC re-establishment period on the "i" th carrier with CCA,			

6.2.1B SA: RRC Re-establishment for RedCap

6.2.1B.1 Introduction

This clause contains requirements on the RedCap UE regarding RRC connection re-establishment procedure.

A neighbour cell for RRC re-establishment procedures for a RedCap UE is defined as an intra-frequency cell if the centre frequency and subcarrier spacing (SCS) of the reference SSB of the serving cell is same as the centre frequency and SCS of the reference SSB of the neighbor cell; else it is considered as inter-frequency cell, where:

- The reference SSB of the target cell is the CD-SSB of the target cell.
- The reference SSB of the serving cell is the CD-SSB of the serving cell.

6.2.1B.2 Requirements

The requirements in clause 6.2.1 shall apply for 2 Rx RedCap UE. For 1 Rx RedCap UE, the requirements defined in clause 6.2.1 shall apply except that:

- $T_{\text{identify_intra_NR}}$ as specified in Table 6.2.1B.2-1.
- $T_{\text{identify_inter_NR, i}}$ as specified in Table 6.2.1B.2-2.

Table 6.2.1B.2-1: Time to identify target NR cell for RRC connection re-establishment to NR intra-frequency cell

Serving cell SSB $\hat{E}_s$ /lot (dB)	FR of target NR cell	$T_{\text{identify_intra_NR}}$ [ms]	
		Known NR cell	Unknown NR cell

≥ -8	FR1	MAX (200 ms, $6 \times T_{\text{SMTc}}$)	MAX (800 ms, $[11] \times T_{\text{SMTc}}$)
< -8	FR1	N/A	800 ^{Note1}
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when $T_{\text{SMTc}} > 20$ ms and serving cell SSB $\hat{E}_s/\text{lot} < -8$ dB.			

Table 6.2.1B.2-2: Time to identify target NR cell for RRC connection re-establishment to NR inter-frequency cell

Serving cell SSB $\hat{E}_s/\text{lot}$ (dB)	FR of target NR cell	$T_{\text{identify_inter_NR}, i}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, $7 \times T_{\text{SMTc}, i}$)	MAX (800 ms, $[14] \times T_{\text{SMTc}, i}$)
< -8	FR1	N/A	800 ^{Note1}
Note 1: The UE is not required to successfully identify a cell on any NR frequency layer when $T_{\text{SMTc}, i} > 20$ ms and serving cell SSB $\hat{E}_s/\text{lot} < -8$ dB.			

When the Redcap specific initial BWP is configured for random access, $T_{\text{UE_re-establish_delay}}$ in clause 6.2.1 is extended by 6ms.

6.2.2 Random access

6.2.2.1 Introduction

This clause contains requirements on the UE regarding random access procedure. The random access procedure is initiated to establish uplink time synchronization for a UE which either has not acquired or has lost its uplink synchronization, or to convey UE's request Other SI, or for beam failure recovery. The random access is specified in clause 8 of TS 38.213 [3] and the control of the RACH transmission is specified in clause 5.1 of TS 38.321 [7]. Two types of procedure are defined for the random access, the 4-step RA type, and the 2-step RA type [7]. The decision on which type of procedure to adopt is as described in clause 5.1.1 of TS 38.321 [7]. The requirements for the 4-step RA type procedure are described in clause 6.2.2.2, whereas the requirements for the 2-step RA type procedure are described in the clause 6.2.2.3 of this specification.

6.2.2.2 Requirements for 4-step RA type

The UE shall select the type of random access at initiation of the random access procedure based on network configuration, as specified in clause 5.1.1 in TS 38.321 [7].

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [3] and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [18] for FR1 and in Table 6.3.4.2-1 of TS 38.101-2 [19] for FR2. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [18] for FR1 and clause 6.3.4.3 of TS 38.101-2 [19] for FR2.

The UE shall indicate a random access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4 in TS 38.321 [7].

The requirements in this clause apply for UE in SA operation mode or any MR-DC operation mode.

6.2.2.2.1 Contention based random access

6.2.2.2.1.1 Correct behaviour when transmitting Random Access Preamble

With the UE selected SSB with SS-RSRP above $rsrp\text{-}Threshold_{\text{SSB}}$, UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SSB is configured, as specified in clause 5.1.2 in TS 38.321 [7].

With the UE selected SSB with SS-RSRP above $rsrp\text{-}Threshold_{\text{SSB}}$, UE shall have the capability to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB

permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

6.2.2.2.1.2 Correct behaviour when receiving Random Access Response

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2.2.2.1.3 Correct behaviour when not receiving Random Access Response

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window defined in clause 5.1.4 in TS 38.321 [7].

6.2.2.2.1.4 Correct behaviour when receiving an UL grant for msg3 retransmission

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

6.2.2.2.1.5 SA: Correct behaviour when receiving a message over Temporary C-RNTI

The UE shall send ACK if the Contention Resolution is successful.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

6.2.2.2.1.6 Correct behaviour when contention Resolution timer expires

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

6.2.2.2.2 Non-Contention based random access

6.2.2.2.2.1 Correct behaviour when transmitting Random Access Preamble

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs is configured, with the UE selected CSI-RS with CSI-RSRP above *rsrp-ThresholdCSI-RS* amongst the associated CSI-RSs, UE shall have the capability to select the Random Access Preamble corresponding to the selected CSI-RS, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions in *ra-OccasionList* corresponding to the selected CSI-RS, and PRACH occasion shall be randomly selected with equal probability amongst the selected CSI-RS associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

If the random access procedure is initialized for beam failure recovery and if the contention-free Random Access Resources and the contention-free PRACH occasions for beam failure recovery request associated with any of the SSBs and/or CSI-RSs is configured, UE shall have the capability to select the Random Access Preamble corresponding to the

selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs or the selected CSI-RS with CSI-RSRP above *rsrp-ThresholdCSI-RS* amongst the associated CSI-RSs, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, or from the PRACH occasions in *ra-OccasionList* corresponding to the selected CSI-RS, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions or the selected CSI-RS associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

6.2.2.2.2.2 Correct behaviour when receiving Random Access Response

The UE may stop monitoring for Random Access Response(s), if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble, unless the random access procedure is initialized for Other SI request from UE.

The UE may stop monitoring for Random Access Response(s) and shall monitor the Other SI transmission if the Random Access Response only contains a Random Access Preamble identifier which is corresponding to the transmitted Random Access Preamble and the random access procedure is initialized for SI request from UE, as specified in clause 5.1.4 in TS 38.321 [7].

The UE may stop monitoring for Random Access Response(s), if the contention-free Random Access Preamble for beam failure recovery request was transmitted and if the PDCCH addressed to UE's C-RNTI is received, as specified in clause 5.1.4 in TS 38.321 [7].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2.2.2.2.3 Correct behaviour when not receiving Random Access Response

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power, if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon* or if no PDCCH addressed to UE's C-RNTI is received within the RA Response window configured in *BeamFailureRecoveryConfig*, as defined in clause 5.1.4 in TS 38.321 [7].

6.2.2.2.3 UE behaviour when configured with supplementary UL

In addition to the requirements defined in clause 6.2.2.2.1 and 6.2.2.2.2, a UE configured with supplementary UL carrier shall use RACH configuration for the supplementary UL carrier contained in RMSI and RRC dedicated signalling. If the cell for the random access procedure is configured with supplementary UL, the UE shall transmit or re-transmit PRACH preamble on the supplementary UL carrier if the SS-RSRP measured by the UE on the DL carrier is lower than the *rsrp-ThresholdSSB-SUL* as defined in TS 38.331 [2].

6.2.2.3 Requirements for 2-step RA type

The UE shall select the type of random access at initiation of the random access procedure based on network configuration, as specified in clause 5.1.1 in TS 38.321 [7].

The UE shall have capability to calculate MsgA PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [3] and the MsgA PUSCH power formula of clause 7.1.1 of TS 38.213 [3] and apply this power level at the first MsgA or additional MsgA repetitions. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [18] for frequency range 1 and in Table 6.3.4.2-1 of TS 38.101-2 [19] for frequency range 2. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [18] for frequency range 1 and clause 6.3.4.3 of TS 38.101-2 [19] for frequency range 2.

The UE shall switch to 4-step RA type procedure if the MsgA transmission counter has exceeded *msgA-TransMax*, if configured, as specified in clause 5.1.4a of TS 38.321 [7]. The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4a in TS 38.321 [7].

The requirements in this clause apply for UE in SA operation mode or any MR-DC operation mode.

6.2.2.3.1 Contention based random access

6.2.2.3.1.1 Correct behaviour when transmitting MsgA

With the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, the UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SS blocks is configured, as specified in clause 5.1.2a in TS 38.321 [7].

With the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, UE shall have the capability to transmit MsgA PRACH on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured.

The PRACH preamble and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [7].

In association with the MsgA PRACH, the UE shall be able to transmit MsgA PUSCH on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH occasion, and preamble index as defined in clause 8.1A in TS 38.213 [3].

6.2.2.3.1.2 Correct behaviour when receiving MsgB

The UE shall stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [3] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [7].

The UE shall send ACK if Success RAR is received in MsgB and the Contention Resolution is successful, as defined in clause 5.1.4a in TS 38.321 [7].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH and monitor contention resolution as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [7].

6.2.2.3.1.3 Correct behaviour when not receiving MsgB

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [7].

6.2.2.3.2 Non-Contention based random access

6.2.2.3.2.1 Correct behaviour when transmitting MsgA

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [7].

In association with the MsgA PRACH, the UE shall be able to transmit MsgA PUSCH on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH occasion, and preamble index as defined in clause 8.1A in TS 38.213 [3].

6.2.2.3.2.2 Correct behaviour when receiving MsgB

The UE may stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [3] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [7].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7] for the next available PRACH occasion, and transmit the preamble with the calculated MsgA PRACH and MsgA PUSCH transmission power if all received MsgBs contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2.2.3.2.3 Correct behaviour when not receiving MsgB

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7] for the next available PRACH occasion, and transmit MsgA with the calculated MsgA PRACH and MsgA PUSCH transmission power, if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA* and the Random Access Response Reception has not been considered as successful as defined in clause 5.1.4a in TS 38.321 [7].

6.2.2.3.3 UE behaviour when configured with supplementary UL

In addition to the requirements defined in clause 6.2.2.3.1 and 6.2.2.3.2, a UE configured with supplementary UL carrier shall use RACH configuration for the supplementary UL carrier contained in RMSI and RRC dedicated signalling. If the cell for the random access procedure is configured with supplementary UL, the UE shall transmit or re-transmit PRACH preamble on the supplementary UL carrier if the SS-RSRP measured by the UE on the DL carrier is lower than the *rsrp-ThresholdSSB-SUL* as defined in TS 38.321 [7].

6.2.2A Random access when CCA is used on target frequency

6.2.2A.1 Introduction

This clause contains requirements on the UE regarding random access procedure when CCA is used on the target frequency. The random access procedure is initiated to establish uplink time synchronization for a UE which either has not acquired or has lost its uplink synchronization, or to convey UE's request Other SI, or for beam failure recovery. The random access is specified in clause 8 of TS 38.213 [3] and the control of the RACH transmission is specified in clause 5.1 of TS 38.321 [7]. Two types of procedure are defined for the random access, the 4-step RA type, and the 2-step RA type [7]. The decision on which type of procedure to adopt is as described in clause 5.1.1 of TS 38.321 [7]. The requirements for the 4-step RA type procedure are described in clause 6.2.2A.2, whereas the requirements for the 2-step RA type procedure are described in the clause 6.2.2A.3 of this specification.

6.2.2A.2 Requirements for 4-step RA type

The UE shall select the type of random access at initiation of the random access procedure based on network configuration, as specified in clause 5.1.1 in TS 38.321 [7].

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [3] and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [18].

The UE shall indicate a random access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4 in TS 38.321 [7].

The requirements in this clause apply for UE operating in a carrier frequency with CCA in SA operation mode or any MR-DC operation mode, in a carrier frequency with CCA.

6.2.2A.2.1 Contention based random access

6.2.2A.2.1.1 Correct behaviour when transmitting Random Access Preamble

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SSB is configured, as specified in clause 5.1.2 in TS 38.321 [7].

If the UL CCA is successful on the next available PRACH occasion, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [7], the UE shall perform the Random Access Resource selection procedure again, as specified in clause 5.1.3 in TS 38.321 [7].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [7], the UE shall increment `PREAMBLE_TRANSMISSION_COUNTER` by 1. The UE shall again perform the Random Access Resource selection procedure if `PREAMBLE_TRANSMISSION_COUNTER` < *preambleTransMax* + 1, as specified in clause 5.1.3 in TS 38.321 [7].

6.2.2A.2.1.2 Correct behaviour when receiving Random Access Response

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2.2A.2.1.3 Correct behaviour when not receiving Random Access Response

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], if the UL CCA is successful, and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window defined in clause 5.1.4 in TS 38.321 [7].

6.2.2A.2.1.4 Correct behaviour when receiving an UL grant for msg3 retransmission

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission, if the UL CCA is successful,

6.2.2A.2.1.5 Correct behaviour when receiving a message over Temporary C-RNTI

If the UL CCA is successful, The UE shall send ACK if the Contention Resolution is successful.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires and the UL CCA is successful, unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

6.2.2A.2.1.6 Correct behaviour when contention Resolution timer expires

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

6.2.2A.2.2 Non-Contention based random access

6.2.2A.2.2.1 Correct behaviour when transmitting Random Access Preamble

If the UL CCA is successful on the next available PRACH occasion and if the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

If the UL CCA is successful, and if the random access procedure is initialized for beam failure recovery and if the contention-free Random Access Resources and the contention-free PRACH occasions for beam failure recovery request associated with SSBs configured, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [7], the UE shall perform the Random Access Resource selection procedure again, as specified in clause 5.1.3 in TS 38.321 [7].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for random access preamble transmission, as outlined in Clause 5.21.2 of TS 38.321 [7], the UE shall increment *PREAMBLE_TRANSMISSION_COUNTER* by 1. The UE shall again perform the Random Access Resource selection procedure if *PREAMBLE_TRANSMISSION_COUNTER* < *preambleTransMax* + 1, as specified in clause 5.1.3 in TS 38.321 [7].

6.2.2A.2.2.2 Correct behaviour when receiving Random Access Response

The UE may stop monitoring for Random Access Response(s), if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble, unless the random access procedure is initialized for Other SI request from UE.

The UE may stop monitoring for Random Access Response(s) and shall monitor the Other SI transmission if the Random Access Response only contains a Random Access Preamble identifier which is corresponding to the transmitted Random Access Preamble and the random access procedure is initialized for SI request from UE, as specified in clause 5.1.4 in TS 38.321 [7].

The UE may stop monitoring for Random Access Response(s), if the contention-free Random Access Preamble for beam failure recovery request was transmitted and if the PDCCH addressed to UE's C-RNTI is received, as specified in clause 5.1.4 in TS 38.321 [7].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7] for the next available PRACH occasion if the UL CCA is successful, and transmit the preamble with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2.2A.2.2.3 Correct behaviour when not receiving Random Access Response

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7] for the next available PRACH occasion if the UL CCA is successful, and transmit the preamble with the calculated PRACH transmission power, if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon* or if no PDCCH addressed to UE's C-RNTI is received within the RA Response window configured in *BeamFailureRecoveryConfig*, as defined in clause 5.1.4 in TS 38.321 [7].

6.2.2A.3 Requirements for 2-step RA type

The UE shall select the type of random access at initiation of the random access procedure based on network configuration, as specified in clause 5.1.1 in TS 38.321 [7].

The UE shall have capability to calculate MsgA PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [3] and the MsgA PUSCH power formula of clause 7.1.1 of TS 38.213 [3] and apply this power level at the first MsgA or additional MsgA repetitions. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [18].

The UE shall switch to 4-step RA type procedure if the MsgA transmission counter has exceeded *msgA-TransMax*, if configured, as specified in clause 5.1.4a of TS 38.321 [7]. The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4a in TS 38.321 [7].

The requirements in this clause apply for UE operating in a carrier frequency with CCA in SA operation mode or any MR-DC operation mode, in a carrier frequency with CCA.

6.2.2A.3.1 Contention based random access

6.2.2A.3.1.1 Correct behaviour when transmitting MsgA

With the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, the UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SS blocks is configured, as specified in clause 5.1.2a in TS 38.321 [7].

If the UL CCA is successful on the next available PRACH occasion, with the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, UE shall have the capability to transmit MsgA PRACH on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured.

The PRACH preamble and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [7].

In association with the MsgA PRACH, if the UL CCA is successful, the UE shall be able to transmit MsgA PUSCH on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH occasion, and preamble index as defined in clause 8.1A in TS 38.213 [3].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for MsgA transmission, as outlined in Clause 5.21.2 of TS 38.321 [7], the UE shall cancel the transmission of the MsgA payload on the associated PUSCH resource and perform the Random Access Resource selection procedure, as specified in clause 5.1.3a in TS 38.321 [7].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for MsgA transmission, as outlined in Clause 5.21.2

of TS 38.321 [7], the UE shall cancel the transmission of the MsgA payload on the associated PUSCH resource and increment PREAMBLE_TRANSMISSION_COUNTER by 1. The UE shall again perform the Random Access Resource selection procedure if PREAMBLE_TRANSMISSION_COUNTER < *preambleTransMax* + 1, as specified in clause 5.1.3a in TS 38.321 [7]. If the Random Access Procedure is not complete and the UE is configured with *msgA-TransMax* then, as specified in clause 5.1.3a in TS 38.321 [7], the UE shall perform the Random Access Resource selection procedure with 4-step RA type provided that PREAMBLE_TRANSMISSION_COUNTER = *msgA-TransMax* + 1.

6.2.2A.3.1.2 Correct behaviour when receiving MsgB

The UE shall stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [3] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [7].

If the UL CCA is successful, the UE shall send ACK if Success RAR is received in MsgB and the Contention Resolution is successful, as defined in clause 5.1.4a in TS 38.321 [7].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH if the UL CCA is successful, and monitor contention resolution as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power, if the UL CCA is successful on the next available PRACH occasion, when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [7].

6.2.2A.3.1.3 Correct behaviour when not receiving MsgB

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7], and if the UL CCA is successful, transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power if the UL CCA is successful on the next available PRACH occasion when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [7].

6.2.2A.3.2 Non-Contention based random access

6.2.2A.3.2.1 Correct behaviour when transmitting MsgA

If the UL CCA is successful, if the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [7].

In association with the MsgA PRACH, the UE shall be able to transmit MsgA PUSCH, if the UL CCA is successful, on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH occasion, and preamble index as defined in clause 8.1A in TS 38.213 [3].

If UE is configured *lbt-FailureRecoveryConfig* and is capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for MsgA transmission, as outlined in Clause 5.21.2 of TS 38.321 [7], the UE shall have cancel the transmission of the MsgA payload on the associated PUSCH resource and perform the Random Access Resource selection procedure, as specified in clause 5.1.3a in TS 38.321 [7].

If UE is not configured *lbt-FailureRecoveryConfig* or is not capable of *ul-LBT-FailureDetectionRecovery* [2] then upon detecting uplink CCA failure during the random access procedure for MsgA transmission, as outlined in Clause 5.21.2 of TS 38.321 [7], the UE shall cancel the transmission of the MsgA payload on the associated PUSCH resource and increment PREAMBLE_TRANSMISSION_COUNTER by 1. The UE shall again perform the Random Access Resource selection procedure if PREAMBLE_TRANSMISSION_COUNTER < *preambleTransMax* + 1, as specified in clause 5.1.3a in TS 38.321 [7]. If the Random Access Procedure is not complete and the UE is configured with *msgA-TransMax* then, as specified in clause 5.1.3a in TS 38.321 [7], the UE shall perform the Random Access Resource

selection procedure with 4-step RA type provided that $\text{PREAMBLE_TRANSMISSION_COUNTER} = \text{msgA-TransMax} + 1$.

6.2.2A.3.2.2 Correct behaviour when receiving MsgB

The UE may stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [3] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [7].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH if the UL CCA is successful, as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7] for the next available PRACH occasion, and transmit the preamble with the calculated MsgA PRACH and MsgA PUSCH transmission power if the UL CCA is successful, if all received MsgBs contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2.2A.3.2.3 Correct behaviour when not receiving MsgB

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7] for the next available PRACH occasion, and transmit MsgA with the calculated MsgA PRACH and MsgA PUSCH transmission power if the UL CCA is successful on the next available PRACH occasion, if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA* and the Random Access Response Reception has not been considered as successful as defined in clause 5.1.4a in TS 38.321 [7].

6.2.2B Random access for RedCap

6.2.2B.1 Introduction

This clause contains requirements on the RedCap UE regarding random access procedure. The random access procedure is initiated to establish uplink time synchronization for a UE which either has not acquired or has lost its uplink synchronization, or to convey UE's request Other SI, or for beam failure recovery. The random access is specified in clause 8 of TS 38.213 [3] and the control of the RACH transmission is specified in clause 5.1 of TS 38.321 [7]. Two types of procedure are defined for the random access, the 4-step RA type, and the 2-step RA type [7]. The decision on which type of procedure to adopt is as described in clause 5.1.1 of TS 38.321 [7].

The 1 Rx RedCap UE for performing the random access procedure defined in clause 5.1 [7] applies:

- rsrp-ThresholdSSB as the signaled value of rsrp-ThresholdSSB [2] + 1 dB.
- $\text{msgA-RSRP-ThresholdSSB}$ as the signaled value of $\text{msgA-RSRP-ThresholdSSB}$ [2] + 1 dB.
- $\text{msgA-RSRP-Threshold}$ as the signaled value of $\text{msgA-RSRP-Threshold}$ [2] + 1 dB.
- $\text{rsrp-ThresholdMsg3}$ as the signaled value of $\text{rsrp-ThresholdMsg3}$ [2] - 1 dB.

6.2.2B.2 Requirements

The requirements for the 4-step RA type procedure described in clause 6.2.2.2 and the requirements for the 2-step RA type procedure described in the clause 6.2.2.3 are applicable for TDD and FDD RedCap UEs. The 4-step and 2-step RA requirements for contention based random access defined in clause 6.2.2.2 and 6.2.2.3 respectively apply to HD-FDD UE with the following conditions:

- The RedCap UE operating in HD-FDD mode is not expected to perform PRACH transmission on a PRACH resource of a cell if UE has not received at least one SSB associated with that PRACH resource during the last T_p period in the cell, where $T_p=160$ ms.

- The RedCap UE operating in HD-FDD mode shall meet the PRACH requirements when performing PRACH transmission on a PRACH resource of a cell provided that the UE has received at least one SSB associated with that PRACH resource during the last T_p period before the PRACH transmission, where $T_p=160$ ms.

6.2.3 SA: RRC Connection Release with Redirection

6.2.3.1 Introduction

This clause contains requirements on the UE regarding RRC connection release with redirection procedure. RRC connection release with redirection is initiated by the *RRCRelease* message with redirection to E-UTRAN or NR from NR specified in TS 38.331 [2]. The RRC connection release with redirection procedure is specified in clause 5.3.8 of TS 38.331 [2].

In the requirements of clause 6.2.3.2, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding identification period; otherwise the SMTC occasion is considered as available at the UE.

In the requirements of clause 6.2.3.2, the term PRACH occasion unavailable for transmission refers to when the PRACH occasion is configured by gNB but not transmitted by the UE during the corresponding period due to UL CCA failure at the UE.

When the RRC connection release with redirection is performed on a cell in FR2-2 with shared spectrum channel access, UE shall determine the CCA mode of the neighbour cell according to *channelAccessMode2-r17* if configured. If *channelAccessMode2-r17* of the cell is enabled, UE shall assume that CCA applies to the cell and perform measurement accordingly, and the requirements in clause 6.2.3.2.3 shall apply; otherwise, UE shall assume that CCA does not apply to the cell and perform measurement accordingly, and requirements in 6.2.3.2.1 shall apply.

6.2.3.2 Requirements

6.2.3.2.1 RRC connection release with redirection to NR

The UE shall be capable of performing the RRC connection release with redirection to the target NR cell within $T_{\text{connection_release_redirect_NR}}$.

The time delay ($T_{\text{connection_release_redirect_NR}}$) is the time between the end of the last slot containing the RRC command, “*RRCRelease*” (TS 38.331 [2]) on the NR PDSCH and the time the UE starts to send random access to the target NR cell. The time delay ($T_{\text{connection_release_redirect_NR}}$) shall be less than:

$$T_{\text{connection_release_redirect_NR}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-NR}} + T_{\text{SI-NR}} + T_{\text{RACH}}$$

The target NR cell shall be considered detectable when for each relevant SSB, the following side conditions are met,

- the conditions of SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.5 for a corresponding NR Band are fulfilled.

$T_{\text{RRC_procedure_delay}}$: It is the RRC procedure delay for processing the received message “*RRCRelease*” as defined in clause 6.2.2 of TS 38.331 [2].

$T_{\text{identify-NR}}$: It is the time to identify the target NR cell and depends on the FR of the target NR cell. It is defined in Table 6.2.3.2.1-1. Note that $T_{\text{identify-NR}} = T_{\text{PSS/SSS-sync}} + T_{\text{meas}}$, in which $T_{\text{PSS/SSS-sync}}$ is the cell search time and T_{meas} is the measurement time due to cell selection criteria evaluation.

$T_{\text{SI-NR}}$: It is the time required for acquiring all the relevant system information of the target NR cell. This time depends upon whether the UE is provided with the relevant system information of the target NR cell or not by the old NR cell before the RRC connection is released. T_{RACH} : It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. T_{RACH} can be up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

T_{TS} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the redirection command, otherwise T_{TS} is the SMTC periodicity configured in the *measObjectNR* having the

same SSB frequency and subcarrier spacing configured for the RRC connection release with redirection. If the measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, T_{rs} is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided with SMTC configuration or measurement object for the frequency which is also configured for the RRC connection release with redirection then:

- the requirement in this clause is applied with $T_{rs} = 20$ ms if the SSB transmission periodicity is not larger than 20 ms; otherwise,
- there is no requirement if the SSB transmission periodicity is larger than 20ms.

Table 6.2.3.2.1-1: Time to identify target NR cell for RRC connection release with redirection to NR

FR of target NR cell	$T_{\text{identify-NR}}$
FR1	MAX (680 ms, $11 \times T_{rs}$)
FR2-1	MAX (880 ms, $8 \times 11 \times T_{rs}$)
FR2-2	MAX (880 ms, $12 \times 11 \times T_{rs}$)
Note: If the UE has been provided with higher layer signaling of <i>smtc2</i> specified in TS 38.331 [2] prior to the redirection command, T_{rs} follows <i>smtc1</i> or <i>smtc2</i> according to the physical cell ID of the target cell.	

6.2.3.2.2 RRC connection release with redirection to E-UTRAN

The UE shall be capable of performing the RRC connection release with redirection to the target E-UTRAN cell within $T_{\text{connection_release_redirect_E-UTRA}}$.

The time delay ($T_{\text{connection_release_redirect_E-UTRA}}$) is the time between the end of the last slot containing the RRC command, “*RRCRelease*” (TS 38.331 [2]) on the PDSCH and the time the UE starts to send random access to the target E-UTRA cell. The time delay ($T_{\text{connection_release_redirect_E-UTRA}}$) shall be less than:

$$T_{\text{connection_release_redirect_E-UTRA}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-E-UTRA}} + T_{\text{SI-E-UTRA}} + T_{\text{RACH}}$$

The target E-UTRA FDD or TDD cell shall be considered detectable provided the following conditions are fulfilled:

- the same conditions as for inter-frequency RSRP measurements specified in annex B.1.2 of TS 36.133 [15] are fulfilled for a corresponding Band, and
- the same conditions as for inter-frequency RSRQ measurements specified in annex B.1.2 of TS 36.133 [15] are fulfilled for a corresponding Band, and
- SCH conditions specified in annex B.1.2 of TS 36.133 [15] are fulfilled for a corresponding Band.

$T_{\text{RRC_procedure_delay}}$: It is the RRC procedure delay for processing the received message “*RRCRelease*” as defined in clause 6.2.2 of TS 38.331 [2].

$T_{\text{identify-E-UTRA}}$: It is the time to identify the target E-UTRA cell. It shall be less than 320 ms.

$T_{\text{SI-E-UTRA}}$: It is the time required for acquiring all the relevant system information of the target E-UTRA cell. This time depends upon whether the UE is provided with the relevant system information (SI) of the target E-UTRA cell or not by the old NR cell before the RRC connection is released.

T_{RACH} : It is the delay caused due to the random access procedure when sending random access to the target E-UTRA cell.

6.2.3.2.3 RRC connection release with redirection to NR carrier subject to CCA

The UE shall be capable of performing the RRC connection release with redirection to the target NR cell subject to CCA within $T_{\text{connection_release_redirect_NR_CCA}}$.

The time delay ($T_{\text{connection_release_redirect_NR_CCA}}$) is the time between the end of the last slot containing the RRC command, “*RRCRelease*” (TS 38.331 [2]) on the NR PDSCH and the time the UE starts to send random access to the target NR cell. The time delay ($T_{\text{connection_release_redirect_NR_CCA}}$) shall be less than:

$$T_{\text{connection_release_redirect_NR_CCA}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-NR_CCA}} + T_{\text{SI-NR_CCA}} + T_{\text{RACH_CCA}}$$

The target NR cell shall be considered detetable when for each relevant SSB, the following side conditions are met .

- the conditions of SSB_RP and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.5 for a corresponding NR Band are fulfilled.
- $T_{RRC_procedure_delay}$: It is the RRC procedure delay for processing the received message “*RRCRelease*” as defined in clause 6.2.2 of TS 38.331 [2].
- $T_{identify-NR_CCA}$: It is the time to identify the target NR cell and is defined as:
 - $T_{identify-NR_CCA} = T_{PSS/SSS-sync} + T_{meas}$; $T_{PSS/SSS-sync}$ is the cell search time and T_{meas} is the measurement time due to cell selection criteria evaluation.
 - For FR1 target NR cell: $T_{identify-NR_CCA} = \text{MAX} (680 \text{ ms}, (L_1+11) \times T_{rs})$;
 - For FR2-2 target NR cell: $T_{identify-NR_CCA} = \text{MAX} (880 \text{ ms}, N \times (L_1'+11) \times T_{rs})$;
 - where L_1 is the number of SMTC occasions not available at the UE due to DL CCA failures and L_1' is the number of SMTC occasion groups not available at the UE due to DL CCA failures. An SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. N is equal to 12. If $L_1 > L_{1,max}$ or $L_1' > L_{1,max}$ then the UE shall initiate cell selection procedures for the selected PLMN as defined in TS 38.304 [1]; where $L_{1,max}$ is defined in Table 6.2.3.2.3-1.
- T_{SI-NR_CCA} : It is the time required for acquiring all the relevant system information of the target NR cell. This time depends upon whether the UE is provided with the relevant system information of the target NR cell or not by the old NR cell before the RRC connection is released.
- T_{RACH_CCA} : It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell:
- $T_{RACH_CCA} = (1+L_2) \times T_{SSB,RO} + 10 \text{ ms } T_{PRACH}$; where:
 - L_2 is the consecutive number of SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failures. $L_2 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33]. $L_3 = 0$ if *ra-ChannelAccess-r17* is not configured in FR2-2.
 - $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in the table 8.1-1 of TS 38.213 [3].
 - The value of L_2 is limited by *PREAMBLE_TRANSMISSION_COUNTER*, which is increased when PRACH occasion is unavailable for PRACH transmission due to UL CCA failure as specified in TS 38.321 [7]. The UE behaviour when *PREAMBLE_TRANSMISSION_COUNTER* reaches the *preambleTransMax* is specified in TS 38.321 [7].
- T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the redirection command, otherwise T_{rs} is the SMTC periodicity configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing configured for the RRC connection release with redirection. If the UE is not provided with SMTC configuration or measurement object for the frequency which is also configured for the RRC connection release with redirection then:
 - the requirement in this clause is applied with $T_{rs} = 20 \text{ ms}$ if the SSB transmission periodicity is not larger than 20 ms;
 - otherwise, there is no requirement if the SSB transmission periodicity is larger than 20ms.

Table 6.2.3.2.3-1: Maximum allowed number of missed SMTC occasions during cell identification

SMTC periodicity (T_{rs}) [ms]	Maximum allowed number of missed SMTC occasions ($L_{1,max}$)
$T_{rs} \leq 40$	8
$T_{rs} > 40$	4

6.2.3A SA: RRC Connection Release with Redirection for RedCap

6.2.3A.1 Introduction

This clause contains requirements on the RedCap UE regarding RRC connection release with redirection procedure. RRC connection release with redirection is initiated by the *RRCRelease* message with redirection to E-UTRAN or NR from NR specified in TS 38.331 [2]. The RRC connection release with redirection procedure is specified in clause 5.3.8 of TS 38.331 [2].

6.2.3A.2 Requirements

6.2.3A.2.1 RRC connection release with redirection to NR

The requirements in clause 6.2.3.2.1 shall apply for 2 Rx RedCap UE. For 1 Rx RedCap UE, the requirements defined in clause 6.2.3.2.1 shall apply except that:

- $T_{\text{identify-NR}}$ as specified in Table 6.2.3A.2.1-1.

Table 6.2.3A.2.1-1: Time to identify target NR cell for RRC connection release with redirection to NR

FR of target NR cell	$T_{\text{identify-NR}}$
FR1	MAX (680 ms, $\lceil 12 \rceil \times T_{\text{rs}}$)
Note: If the UE has been provided with higher layer signaling of <i>smtc2</i> specified in TS 38.331 [2] prior to the redirection command, T_{rs} follows <i>smtc1</i> or <i>smtc2</i> according to the physical cell ID of the target cell.	

The HD-FDD UE shall meet the RRC connection release with redirection requirements provided that SSB is available at the UE once every SMTC period during T_{search} .

When the Redcap specific initial BWP is configured for random access, $T_{\text{connection_release_redirect_NR}}$ in clause 6.2.3.2.1 is extended by 6ms.

6.2.3A.2.2 RRC connection release with redirection to E-UTRAN

The requirements in clause 6.2.3.2.2 shall apply.

6.2C RRC Connection Mobility Control for Satellite Access

6.2C.1 SA: RRC Re-establishment for Satellite Access

6.2C.1.1 Introduction

This clause contains requirements on the UE regarding RRC connection re-establishment procedure. RRC connection re-establishment is initiated when a UE in RRC_CONNECTED state on the carrier loses RRC connection due to any of failure cases, including radio link failure, handover failure, and RRC connection reconfiguration failure. The RRC connection re-establishment procedure is specified in clause 5.3.7 of TS 38.331 [2].

The requirements in this clause are applicable for RRC connection re-establishment to NR cell, which is served by satellite access node (SAN).

6.2C.1.2 Requirements

In RRC_CONNECTED state the UE shall be capable of sending *RRCReestablishmentRequest* message within $T_{\text{re-establish_delay}}$ seconds from the moment it detects a loss in RRC connection. The total RRC connection delay ($T_{\text{re-establish_delay}}$) shall be less than:

$$T_{\text{re-establish_delay}} = T_{\text{UE_re-establish_delay}} + T_{\text{UL_grant}}$$

T_{UL_grant} : It is the time required to acquire and process uplink grant from the target PCell. The uplink grant is required to transmit *RRCReestablishmentRequest* message.

The UE re-establishment delay ($T_{UE_re-establish_delay}$) is specified in clause 6.2C.1.2.1.

6.2C.1.2.1 UE Re-establishment delay requirement

The UE re-establishment delay ($T_{UE_re-establish_delay}$) is the time between the moments when any of the conditions requiring RRC re-establishment as defined in clause 5.3.7 in TS 38.331 [2] is detected by the UE and when the UE sends PRACH to the target PCell. The UE re-establishment delay ($T_{UE_re-establish_delay}$) requirement shall be less than:

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

The intra-frequency target NR cell shall be considered detectable if each relevant SSB can satisfy that:

- SS-RSRP related side conditions given in clause 10.1.2C are fulfilled for a corresponding NR Band for FR1, and
- the conditions of SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.17 for a corresponding NR Band are fulfilled.

The inter-frequency target NR cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clause 10.1.4C are fulfilled for a corresponding NR Band for FR1, and
- the conditions of SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.18 for a corresponding NR Band are fulfilled.

$T_{identify_intra_NR}$: It is the time to identify the target intra-frequency NR cell and it depends on whether the target NR cell is known cell or unknown cell. If the UE is not configured with intra-frequency NR carrier for RRC re-establishment then $T_{identify_intra_NR}=0$; otherwise $T_{identify_intra_NR}$ shall not exceed the values defined in Table 6.2C.1.2.1-1.

$T_{identify_inter_NR,i}$: It is the time to identify the target inter-frequency NR cell on inter-frequency carrier i configured for RRC re-establishment and it depends on whether the target NR cell is known cell or unknown cell. $T_{identify_inter_NR,i}$ shall not exceed the values defined in Table 6.2C.1.2.1-2.

T_{SMTc} : It is the periodicity of the SMTc occasion configured for the intra-frequency carrier. If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2*, T_{smtc} follows *smtc1* or *smtc2* according to the physical cell ID of the target cell.

$T_{SMTc,i}$: It is the periodicity of the SMTc occasion configured for the inter-frequency carrier i . If it is not configured, the UE may assume that the target SSB periodicity is no larger than 20 ms.

T_{SI-NR} : It is the time required for receiving all the relevant system information according to the reception procedure and the RRC procedure delay of system information blocks defined in TS 38.331 [2] for the target NR cell.

T_{PRACH} : It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. T_{PRACH} can be up to the summation of SSB to PRACH occasion association period and [10] ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

N_{freq} : It is the total number of NR frequencies to be monitored for RRC re-establishment; $N_{freq} = 1$ if the target intra-frequency NR cell is known, else $N_{freq} = 2$ and $T_{identify_intra_NR} = 0$ if the target inter-frequency NR cell is known.

There is no requirement if the target cell does not contain the UE context.

In the requirement defined in the below tables, the target FR1 cell is known if it has been meeting the relevant cell identification requirement during the last 5 seconds otherwise it is unknown.

The requirements in this clause apply provided that the ephemeris information provided by the serving cell for the target cell is valid during UE re-establishment delay ($T_{UE_re-establish_delay}$).

Table 6.2C.1.2.1-1: Time to identify target NR cell for RRC connection re-establishment to NR intra-frequency cell

Serving cell SSB $\hat{E}_s/I_{ot}$ (dB)	FR of target NR cell	$T_{identify_intra_NR}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, $5 \times T_{SMTc}$)	$K_{multi_SMTc} * \text{MAX} (800 \text{ ms}, 10 \times T_{SMTc})$
< -8	FR1	N/A	$k * 800 \text{ ms}$ Note1, 3

Note 1:	The UE is not required to successfully identify a cell on any NR frequency layer when $T_{\text{SMTc}} > 20$ ms and serving cell SSB $\hat{E}_s/\text{lot} < -8$ dB.
Note 2:	$K_{\text{multi_SMTc}}$ is defined in clause 9.2C.5.1.
Note 3:	$k = 1$ if the cells on the target frequency are served by GEO. $k = (N+1)$ if the cells on the target frequency are served by LEO, where N is the number of different satellites associated to the list of configured neighbor cells in <code>ntn-NeighCellConfigList</code> and <code>ntn-NeighCellConfigListExt</code> .

Table 6.2C.1.2.1-2: Time to identify target NR cell for RRC connection re-establishment to NR inter-frequency cell

Serving cell SSB $\hat{E}_s/\text{lot}$ (dB)	FR of target NR cell	$T_{\text{identify_inter_NR}, i}$ [ms]	
		Known NR cell	Unknown NR cell
≥ -8	FR1	MAX (200 ms, $6 \times T_{\text{SMTc}, i}$)	$K_{\text{satellite}} * \text{MAX} (800 \text{ ms}, 13 \times T_{\text{SMTc}, i})$
< -8	FR1	N/A	$k * 800 \text{ ms}$ ^{Note1, 3}
Note 1:	The UE is not required to successfully identify a cell on any NR frequency layer when $T_{\text{SMTc}, i} > 20$ ms and serving cell SSB $\hat{E}_s/\text{lot} < -8$ dB.		
Note 2:	$K_{\text{satellite}}$ is defined in clause 9.3C.4.		
Note 3:	$k = 1$ if the cells on the target frequency are served by GEO. $k = (N+1)$ if the cells on the target frequency are served by LEO, where N is the number of different satellites associated to the list of configured neighbor cells in <code>ntn-NeighCellConfigList</code> and <code>ntn-NeighCellConfigListExt</code> .		

6.2C.2 Random access for satellite access

6.2C.2.1 Introduction

This clause contains requirements on the UE regarding random access procedure. The random access procedure is initiated to establish uplink time synchronization for a UE which either has not acquired or has lost its uplink synchronization, or to convey UE's request Other SI, or for beam failure recovery. The random access is specified in clause 8 of TS 38.213 [3] and the control of the RACH transmission is specified in clause 5.1 of TS 38.321 [7]. Two types of procedure are defined for the random access, the 4-step RA type, and the 2-step RA type [7]. The decision on which type of procedure to adopt is as described in clause 5.1.1 of TS 38.321 [7]. The requirements for the 4-step RA type procedure are described in clause 6.2C.2.2, whereas the requirements for the 2-step RA type procedure are described in the clause 6.2C.2.3 of this specification.

6.2C.2.2 Requirements for 4-step RA type

The UE shall select the type of random access at initiation of the random access procedure based on network configuration, as specified in clause 5.1.1 in TS 38.321 [7].

The UE shall have capability to calculate PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [3] and apply this power level at the first preamble or additional preambles. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [18] for FR1. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [18] for FR1.

The UE shall indicate a random access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell or PSCell as specified in clause 5.1.4 in TS 38.321 [7].

The requirements in this clause apply for UE in SA operation mode.

6.2C.2.2.1 Contention based random access

6.2C.2.2.1.1 Correct behaviour when transmitting Random Access Preamble

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SSB is configured, as specified in clause 5.1.2 in TS 38.321 [7].

With the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB*, UE shall have the capability to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

6.2C.2.2.1.2 Correct behaviour when receiving Random Access Response

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2C.2.2.1.3 Correct behaviour when not receiving Random Access Response

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window defined in clause 5.1.4 in TS 38.321 [7].

6.2C.2.2.1.4 Correct behaviour when receiving an UL grant for msg3 retransmission

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

6.2C.2.2.1.5 SA: Correct behaviour when receiving a message over Temporary C-RNTI

The UE shall send ACK if the Contention Resolution is successful.

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

6.2C.2.2.1.6 Correct behaviour when contention Resolution timer expires

The UE shall re-select a preamble and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

6.2C.2.2.2 Non-Contention based random access

6.2C.2.2.2.1 Correct behaviour when transmitting Random Access Preamble

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs is configured, with the UE selected CSI-RS with CSI-RSRP above *rsrp-ThresholdCSI-RS* amongst the associated CSI-RSs, UE shall have the capability to select the Random Access Preamble corresponding to the selected CSI-RS, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions in *ra-OccasionList* corresponding to the selected CSI-RS, and PRACH occasion shall be randomly selected with equal probability amongst the selected CSI-RS associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

If the random access procedure is initialized for beam failure recovery and if the contention-free Random Access Resources and the contention-free PRACH occasions for beam failure recovery request associated with any of the SSBs and/or CSI-RSs is configured, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB with SS-RSRP above *rsrp-ThresholdSSB* amongst the associated SSBs or the selected CSI-RS with CSI-RSRP above *rsrp-ThresholdCSI-RS* amongst the associated CSI-RSs, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex* if configured, or from the PRACH occasions in *ra-OccasionList* corresponding to the selected CSI-RS, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions or the selected CSI-RS associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2 in TS 38.321 [7].

6.2C.2.2.2.2 Correct behaviour when receiving Random Access Response

The UE may stop monitoring for Random Access Response(s), if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble, unless the random access procedure is initialized for Other SI request from UE.

The UE may stop monitoring for Random Access Response(s) and shall monitor the Other SI transmission if the Random Access Response only contains a Random Access Preamble identifier which is corresponding to the transmitted Random Access Preamble and the random access procedure is initialized for SI request from UE, as specified in clause 5.1.4 in TS 38.321 [7].

The UE may stop monitoring for Random Access Response(s), if the contention-free Random Access Preamble for beam failure recovery request was transmitted and if the PDCCH addressed to UE's C-RNTI is received, as specified in clause 5.1.4 in TS 38.321 [7].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2C.2.2.2.3 Correct behaviour when not receiving Random Access Response

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2 in TS 38.321 [7] for the next available PRACH occasion, and transmit the preamble with the calculated PRACH transmission power, if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon* or if no PDCCH addressed to UE's C-RNTI is received within the RA Response window configured in *BeamFailureRecoveryConfig*, as defined in clause 5.1.4 in TS 38.321 [7].

6.2C.2.3 Requirements for 2-step RA type

The UE shall select the type of random access at initiation of the random access procedure based on network configuration, as specified in clause 5.1.1 in TS 38.321 [7].

The UE shall have capability to calculate MsgA PRACH transmission power according to the PRACH power formula defined in clause 7.4 of TS 38.213 [3] and the MsgA PUSCH power formula of clause 7.1.1 of TS 38.213 [3] and apply this power level at the first MsgA or additional MsgA repetitions. The absolute power applied to the first preamble shall have an accuracy as specified in Table 6.3.4.2-1 of TS 38.101-1 [18] for frequency range 1. The relative power applied to additional preambles shall have an accuracy as specified in Table 6.3.4.3-1 of TS 38.101-1 [18] for frequency range 1.

The UE shall switch to 4-step RA type procedure if the MsgA transmission counter has exceeded *msgA-TransMax*, if configured, as specified in clause 5.1.4a of TS 38.321 [7]. The UE shall indicate a Random Access problem to upper layers if the maximum number of preamble transmission counter has been reached for the random access procedure on PCell as specified in clause 5.1.4a in TS 38.321 [7].

The requirements in this clause apply for UE in SA operation mode.

6.2C.2.3.1 Contention based random access

6.2C.2.3.1.1 Correct behaviour when transmitting MsgA

With the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, the UE shall have the capability to select a Random Access Preamble randomly with equal probability from the Random Access Preambles associated with the selected SSB if the association between Random Access Preambles and SS blocks is configured, as specified in clause 5.1.2a in TS 38.321 [7].

With the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB*, UE shall have the capability to transmit MsgA PRACH on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, if the association between PRACH occasions and SSBs is configured.

The PRACH preamble and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [7].

In association with the MsgA PRACH, the UE shall be able to transmit MsgA PUSCH on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH occasion, and preamble index as defined in clause 8.1A in TS 38.213 [3].

6.2C.2.3.1.2 Correct behaviour when receiving MsgB

The UE shall stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [3] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [7].

The UE shall send ACK if Success RAR is received in MsgB and the Contention Resolution is successful, as defined in clause 5.1.4a in TS 38.321 [7].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH and monitor contention resolution as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [7].

6.2C.2.3.1.3 Correct behaviour when not receiving MsgB

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires unless the Random Access Response reception is considered as successful, as defined in clause 5.1.4a in TS 38.321 [7].

6.2C.2.3.2 Non-Contention based random access

6.2C.2.3.2.1 Correct behaviour when transmitting MsgA

If the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs is configured, with the UE selected SSB with SS-RSRP above *msgA-RSRP-ThresholdSSB* amongst the associated SSBs, UE shall have the capability to select the Random Access Preamble corresponding to the selected SSB, and to transmit Random Access Preamble on the next available PRACH occasion from the PRACH occasions corresponding to the selected SSB permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured, and PRACH occasion shall be randomly selected with equal probability amongst the selected SSB associated PRACH occasions occurring simultaneously but on different subcarriers, as specified in clause 5.1.2a in TS 38.321 [7].

In association with the MsgA PRACH, the UE shall be able to transmit MsgA PUSCH on the corresponding PUSCH occasion associated with a DMRS resource, which is mapped from the MsgA PRACH occasion, and preamble index as defined in clause 8.1A in TS 38.213 [3].

6.2C.2.3.2.2 Correct behaviour when receiving MsgB

The UE may stop monitoring for MsgB, when the UE has successfully received the PDCCH addressed to UE as specified in clause 8.2A in TS 38.213 [3] containing a successRAR MAC subPDU or a fallbackRAR MAC subPDU as described in clause 5.1.4a in TS 38.321 [7].

If MsgB contains a fallbackRAR MAC subPDU the UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7] for the next available PRACH occasion, and transmit the preamble with the calculated MsgA PRACH and MsgA PUSCH transmission power if all received MsgBs contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

6.2C.2.3.2.3 Correct behaviour when not receiving MsgB

The UE shall again perform the Random Access Resource selection procedure defined in clause 5.1.2a in TS 38.321 [7] for the next available PRACH occasion, and transmit MsgA with the calculated MsgA PRACH and MsgA PUSCH transmission power, if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA* and the Random Access Response Reception has not been considered as successful as defined in clause 5.1.4a in TS 38.321 [7].

6.2C.3 SA: RRC Connection Release with Redirection for Satellite Access

6.2C.3.1 Introduction

This clause contains requirements on the UE regarding RRC connection release with redirection procedure. RRC connection release with redirection is initiated by the *RRCRelease* message with redirection to NR from NR specified in TS 38.331 [2]. The RRC connection release with redirection procedure is specified in clause 5.3.8 of TS 38.331 [2].

6.2C.3.2 Requirements

6.2C.3.2.1 RRC connection release with redirection to NR

The UE shall be capable of performing the RRC connection release with redirection to the target NR cell within $T_{\text{connection_release_redirect_NR}}$.

The time delay ($T_{\text{connection_release_redirect_NR}}$) is the time between the end of the last slot containing the RRC command, “*RRCRelease*” (TS 38.331 [2]) on the NR PDSCH and the time the UE starts to send random access to the target NR cell. The time delay ($T_{\text{connection_release_redirect_NR}}$) shall be less than:

$$T_{\text{connection_release_redirect_NR}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-NR}} + T_{\text{SI-NR}} + T_{\text{RACH}}$$

The target NR cell shall be considered detectable when for each relevant SSB, the following side conditions are met.,

- the conditions of SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.5 for a corresponding NR Band are fulfilled.
- $T_{\text{RRC_procedure_delay}}$: It is the RRC procedure delay for processing the received message “*RRCRelease*” as defined in clause 6.2.2 of TS 38.331 [2].
- $T_{\text{identify-NR}}$: It is the time to identify the target NR cell and depends on the FR of the target NR cell. It is defined in Table 6.2C.3.2.1-1. Note that $T_{\text{identify-NR}} = T_{\text{PSS/SSS-sync}} + T_{\text{meas}}$, in which $T_{\text{PSS/SSS-sync}}$ is the cell search time and T_{meas} is the measurement time due to cell selection criteria evaluation.
- $T_{\text{SI-NR}}$: It is the time required for acquiring all the relevant system information of the target NR cell. This time depends upon whether the UE is provided with the relevant system information of the target NR cell or not by the old NR cell before the RRC connection is released. T_{RACH} : It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. T_{RACH} can be up to the summation of SSB to PRACH occasion

association period and 10 ms. SSB to PRACH occasion associated period is defined in the table 8.1-1 of TS 38.213 [3].

- T_{rs} is the SMTC periodicity of the target NR cell if the UE has been provided with an SMTC configuration for the target cell in the redirection command, otherwise T_{rs} is the SMTC periodicity configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing configured for the RRC connection release with redirection.. If the UE is not provided with SMTC configuration or measurement object for the frequency which is also configured for the RRC connection release with redirection then:
- the requirement in this clause is applied with $T_{rs} = 20$ ms if the SSB transmission periodicity is not larger than 20 ms; otherwise,
- there is no requirement if the SSB transmission periodicity is larger than 20ms.

The requirements in this clause apply provided that the ephemeris information provided by the serving cell for the target cell is valid during time delay ($T_{\text{connection_release_redirect_NR}}$).

Table 6.2C.3.2.1-1: Time to identify target NR cell for RRC connection release with redirection to NR

FR of target NR cell	$T_{\text{identify-NR}}$
FR1	$K_{\text{satellite}} * \text{MAX}(680 \text{ ms}, 11 * T_{rs})$
Note 1: If the UE has been provided with higher layer signaling of <i>smtc2</i> specified in TS 38.331 [2] prior to the redirection command, T_{rs} follows <i>smtc1</i> or <i>smtc2</i> according to the physical cell ID of the target cell.	
Note 2: $K_{\text{satellite}}$ is defined in clause 9.3C.4.	

7 Timing

7.1 UE transmit timing

7.1.1 Introduction

The UE shall have capability to follow the frame timing change of the reference cell in connected state or when transmitting PUSCH on CG resources for SDT in RRC_Inactive. The uplink frame transmission takes place $(N_{TA} + N_{TA \text{ offset}}) \times T_c$ before the reception of the first detected path (in time) of the corresponding downlink frame from the reference cell. For serving cell(s) in pTAG, UE shall use the SpCell as the reference cell for deriving the UE transmit timing for cells in the pTAG. For serving cell(s) in sTAG, UE shall use any of the activated SCells as the reference cell for deriving the UE transmit timing for the cells in the sTAG. UE initial transmit timing accuracy and gradual timing adjustment requirements are defined in the following requirements.

In the requirements of clause 7.1.2, the term reference cell on a carrier frequency subject to CCA is not available at the UE refers to when at least one SSB is configured by gNB, but the first two successive candidate SSB positions for the same SSB index within the discovery burst transmission window are not available during at least one discovery burst transmission window, at the UE due to DL CCA failures at gNB during the last 1280 ms; otherwise the reference cell on the carrier frequency subject to CCA is considered as available at the UE.

7.1.2 Requirements

The UE initial transmission timing error shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is specified in Table 7.1.2-1. This requirement applies:

- when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS, or it is the PRACH transmission, or it is the msgA transmission, or it is the first transmission sent on the PSCell for activating the deactivated SCG without RACH.
- when it is the transmission for PUSCH on CG resources for SDT in RRC_Inactive.

When the UL SCS is 120 kHz or smaller, the UE shall meet the T_e requirement for an initial transmission provided that at least one SSB is available at the UE during the last 160 ms. When the UL SCS is 480 kHz the UE shall meet the T_e requirement for an initial transmission provided that at least one SSB is available in the last 80 ms. When the UL SCS is 960 kHz the UE shall meet the T_e requirement for an initial transmission provided that at least one SSB is available in the last 40 ms. The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $(N_{TA} + N_{TA\ offset}) \times T_c$. The downlink timing is defined as the time when the first path (in time) of the corresponding downlink frame used by the UE to determine downlink timing is received from the reference cell at the UE antenna. N_{TA} for PRACH is defined as 0.

$(N_{TA} + N_{TA\ offset}) \times T_c$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance in clause 7.3 was applied. N_{TA} for other channels is not changed until next timing advance is received. The value of $N_{TA\ offset}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{TA\ offset}$ is defined in Table 7.1.2-2.

Table 7.1.2-1: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals (kHz)	T_e
1	15	15	$12 \cdot 64 \cdot T_c$
		30	$10 \cdot 64 \cdot T_c$
		60	$10 \cdot 64 \cdot T_c$
	30	15	$8 \cdot 64 \cdot T_c$
		30	$8 \cdot 64 \cdot T_c$
		60	$7 \cdot 64 \cdot T_c$
2-1	120	60	$3.5 \cdot 64 \cdot T_c$
		120	$3.5 \cdot 64 \cdot T_c$
	240	60	$3 \cdot 64 \cdot T_c$
		120	$3 \cdot 64 \cdot T_c$
2-2	120	120	$3.5 \cdot 64 \cdot T_c$
		480	$1.58 \cdot 64 \cdot T_c$
	480	120	$2.86 \cdot 64 \cdot T_c$
		480	$1.35 \cdot 64 \cdot T_c$
		960	$0.90 \cdot 64 \cdot T_c$
	960	120	$2.80 \cdot 64 \cdot T_c$
		480	$1.13 \cdot 64 \cdot T_c$
		960	$0.86 \cdot 64 \cdot T_c$

Note 1: T_c is the basic timing unit defined in TS 38.211 [6]

Table 7.1.2-2: The Value of $N_{TA\ offset}$

Frequency range and band of cell used for uplink transmission	$N_{TA\ offset}$ (Unit: T_c)
FR1 FDD or TDD band with neither E-UTRA–NR nor NB-IoT–NR coexistence case	25600 (Note 1)
FR1 FDD band with E-UTRA–NR and/or NB-IoT–NR coexistence case	0 (Note 1)
FR1 TDD band with E-UTRA–NR and/or NB-IoT–NR coexistence case	39936 (Note 1)
FR2	13792
Note 1: The UE identifies $N_{TA\ offset}$ based on the information n-TimingAdvanceOffset as specified in TS 38.331 [2]. If UE is not provided with the information n-TimingAdvanceOffset, the default value of $N_{TA\ offset}$ is set as 25600 for FR1 band. In case of multiple UL carriers in the same TAG, UE expects that the same value of n-TimingAdvanceOffset is provided for all the UL carriers according to clause 4.2 in TS 38.213 [3] and the value 39936 of $N_{TA\ offset}$ can also be provided for a FDD serving cell. Note 2: Void	

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame of the reference cell except when the timing advance in clause 7.3 is applied.

Table 7.1.2-3: void

If the UE uses a reference cell on a carrier frequency subject to CCA for deriving the UE transmit timing, then the UE shall meet all the transmit timing requirements defined in clause 7.1.2 provided that the reference cell is available at the UE. If the reference cell is not available at the UE on a carrier frequency subject to CCA, then the UE is allowed to transmit in the uplink provided that the UE meets all the transmit timing requirements defined in clause 7.1.2; otherwise the UE shall not transmit any uplink signal.

If a reference cell on a carrier frequency belonging to the PTAG, which is subject to CCA, is not available at the UE then the UE is allowed to use any of available activated SCell(s) at the UE in PTAG as a new reference cell. If the SCell used as reference cell is deactivated, or becomes not available, the UE is allowed to use another active serving cell in PTAG as new reference cell.

If a reference cell on a carrier frequency belonging to the STAG, which is subject to CCA is not available at the UE then the UE is allowed to use any of available activated SCell(s) at the UE in STAG as a new reference cell.

7.1.2.1 Gradual timing adjustment

Requirements in this section shall apply regardless of whether the reference cell is on a carrier frequency subject to CCA or not.

When the transmission timing error between the UE and the reference timing exceeds $\pm T_e$ then the UE shall adjust the timing such that timing error is within $\pm T_e$. The reference timing shall be $(N_{TA} + N_{TA\text{ offset}}) \times T_c$ before the downlink timing of the reference cell. All adjustments made to the UE uplink timing shall follow these rules:

- 1) The maximum amount of the magnitude of the timing change in one adjustment shall be T_q .
- 2) The minimum aggregate adjustment rate shall be T_p per second.
- 3) The maximum aggregate adjustment rate shall be T_q per 200 ms for SCS of UL signals smaller or equal to 120 kHz and 100 ms for SCS of uplink signals larger or equal to 480 kHz.

where the maximum autonomous time adjustment step T_q and the aggregate adjustment rate T_p are specified in Table 7.1.2.1-1.

Table 7.1.2.1-1: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (kHz)	T_q	T_p
1	15	$5.5 \cdot 64 \cdot T_c$	$5.5 \cdot 64 \cdot T_c$
	30	$5.5 \cdot 64 \cdot T_c$	$5.5 \cdot 64 \cdot T_c$
	60	$5.5 \cdot 64 \cdot T_c$	$5.5 \cdot 64 \cdot T_c$
2-1	60	$K \cdot 64 \cdot T_c$	$2.5 \cdot 64 \cdot T_c$
	120	$K \cdot 64 \cdot T_c$	$2.5 \cdot 64 \cdot T_c$
2-2	120	$2.5 \cdot 64 \cdot T_c$	$2.5 \cdot 64 \cdot T_c$
	480	$0.8 \cdot 64 \cdot T_c$	$0.8 \cdot 64 \cdot T_c$
	960	$0.8 \cdot 64 \cdot T_c$	$0.8 \cdot 64 \cdot T_c$
NOTE 1: T_c is the basic timing unit defined in TS 38.211 [6]			
NOTE 2: When <i>highSpeedMeasFlagFR2-r17</i> is configured for UE supporting power class 6, $K = 4.5$; otherwise, $K = 2.5$.			

7.1.2.2 Void

Table 7.1.2.2-1: Void

7.1.2.3 One shot large UL timing adjustment for FR2 Power Class 6 UE

When *highSpeedMeasFlagFR2-r17* is configured and *highSpeedLargeOneStepUL-TimingFR2-r17* is enabled for UE supporting FR2 power class 6 and *ue-OneShotUL-TimingAdj-r17* capability, the following requirements apply to the UE:

- If the absolute value $|T_{old} - T_{new}| \leq CP/4$, the requirement in clause 7.1.2.1 apply to the first UL transmission after a TCI state switch.
- Otherwise, the UE transmit timing immediately after TCI state switch shall be $T_{new} - (N_{TA} + N_{TA\ offset}) + 2 \times (T_{old} - T_{new})$ and clause 7.1.2.1 requirements don't apply.
- The UE UL transmission timing error after the TCI state switching procedure shall be less than or equal to $\pm T_e$ as specified in clause 7.1.2 if the new target TCI state is within active TCI state list, otherwise $\pm 7 \cdot 64 \cdot T_c$, and the reference point is $T_{new} - (N_{TA} + N_{TA\ offset}) + 2 \times (T_{old} - T_{new})$.

Above,

- T_{new} (in T_c units) is the DL timing defined as the time when UE receives downlink frame with new target TCI state.
- T_{old} (in T_c units) is the DL timing defined as the time when UE receives downlink frame with old source TCI state.

7.1A UE transmit timing for RedCap

7.1A.1 Introduction

The UE shall have capability to follow the frame timing change of the reference cell in connected state or when transmitting PUSCH on CG resources for SDT in RRC_Inactive. The uplink frame transmission takes place $(N_{TA} + N_{TA\ offset}) \times T_c$ before the reception of the first detected path (in time) of the corresponding downlink frame from the reference cell. UE initial transmit timing accuracy and gradual timing adjustment requirements are defined in the following requirements.

7.1A.2 Requirements

The UE initial transmission timing error shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is specified in Table 7.1A.2-1. This requirement applies:

- when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS, or it is the PRACH transmission, or it is the msgA transmission.
- when it is the transmission for PUSCH on CG resources for SDT in RRC_Inactive.

The UE shall meet the T_e requirement for an initial transmission provided that at least one SSB (CD-SSB or NCD-SSB) is available at the UE for acquiring the frame timing of the reference cell during the last 160 ms on the condition that:

- the SSB is within the UE's active BWP, or
- the SSB is not within the UE's active BWP, and the measurement gap is configured.

The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $(N_{TA} + N_{TA\ offset}) \times T_c$. The downlink timing is defined as the time when the first ~~detected~~ path (in time) of the corresponding downlink frame used by the UE to determine downlink timing is received from the reference cell at UE antenna. N_{TA} for PRACH is defined as 0.

$(N_{TA} + N_{TA\ offset}) \times T_c$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance in clause 7.3A was applied. N_{TA} for other channels is not changed until next timing advance is received. The value of $N_{TA\ offset}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{TA\ offset}$ is defined in Table 7.1A.2-2.

Table 7.1A.2-1: T_e Timing Error Limit

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals (kHz)	T_e
1	15	15	$12 \cdot 64 \cdot T_c$
		30	$10 \cdot 64 \cdot T_c$
		60	$10 \cdot 64 \cdot T_c$
	30	15	$8 \cdot 64 \cdot T_c$
		30	$8 \cdot 64 \cdot T_c$
		60	$7 \cdot 64 \cdot T_c$
2	120	60	$3.5 \cdot 64 \cdot T_c$
		120	$3.5 \cdot 64 \cdot T_c$
	240	60	$3 \cdot 64 \cdot T_c$
		120	$3 \cdot 64 \cdot T_c$

Note 1: T_c is the basic timing unit defined in TS 38.211 [6]

Table 7.1A.2-2: The Value of $N_{TA\ offset}$

Frequency range and band of cell used for uplink transmission	$N_{TA\ offset}$ (Unit: T_c)
FR1 FDD or TDD band with neither E-UTRA–NR nor NB–IoT–NR coexistence case	25600 (Note 1)
FR1 FDD band with E-UTRA–NR and/or NB–IoT–NR coexistence case	0 (Note 1)
FR1 TDD band with E-UTRA–NR and/or NB–IoT–NR coexistence case	39936 (Note 1)
FR2	13792
Note 1: The UE identifies $N_{TA\ offset}$ based on the information n-TimingAdvanceOffset as specified in TS 38.331 [2]. If UE is not provided with the information n-TimingAdvanceOffset, the default value of $N_{TA\ offset}$ is set as 25600 for FR1 band. Note 2: Void	

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame of the reference cell except when the timing advance in clause 7.3A is applied.

7.1A.2.1 Gradual timing adjustment

When the transmission timing error between the UE and the reference timing exceeds $\pm T_e$ then the UE is required to adjust its timing to within $\pm T_e$. The reference timing shall be $(N_{TA} + N_{TA\ offset}) \times T_c$ before the downlink timing of the reference cell. All adjustments made to the UE uplink timing shall follow these rules:

- 1) The maximum amount of the magnitude of the timing change in one adjustment shall be T_q .
- 2) The minimum aggregate adjustment rate shall be T_p per second.
- 3) The maximum aggregate adjustment rate shall be T_q per 200 ms.

where the maximum autonomous time adjustment step T_q and the aggregate adjustment rate T_p are specified in Table 7.1A.2.1-1.

Table 7.1A.2.1-1: T_q Maximum Autonomous Time Adjustment Step and T_p Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (kHz)	T_q	T_p
1	15	$5.5 \cdot 64 \cdot T_c$	$5.5 \cdot 64 \cdot T_c$
	30	$5.5 \cdot 64 \cdot T_c$	$5.5 \cdot 64 \cdot T_c$
	60	$5.5 \cdot 64 \cdot T_c$	$5.5 \cdot 64 \cdot T_c$
2	60	$2.5 \cdot 64 \cdot T_c$	$2.5 \cdot 64 \cdot T_c$
	120	$2.5 \cdot 64 \cdot T_c$	$2.5 \cdot 64 \cdot T_c$
NOTE: T_c is the basic timing unit defined in TS 38.211 [6]			

7.1C UE transmit timing for Satellite Access

7.1C.1 Introduction

The UE shall have capability to follow the frame timing change of the reference cell in connected state. The uplink frame transmission takes place $(N_{TA} + N_{TA\text{-offset}} + N_{TA,adj}^{common} + N_{TA,adj}^{UE}) \times T_c$ before the reception of the first detected path (in time) of the corresponding downlink frame from the reference cell. UE initial transmit timing accuracy and gradual timing adjustment requirements are defined in the following requirements.

7.1C.2 Requirements

The UE initial transmission timing error shall be less than or equal to $\pm T_{e_NTN}$ where the timing error limit value T_{e_NTN} is specified in Table 7.1C.2-1. This requirement applies:

- when it is the first transmission in a DRX cycle for PUCCH, PUSCH and SRS, or it is the PRACH transmission, or it is the msgA transmission..

The UE shall meet the T_{e_NTN} requirement for an initial transmission provided that at least one SSB is available at the UE during the last 160 ms.. The reference point for the UE initial transmit timing control requirement shall be the downlink timing of the reference cell minus $(N_{TA} + N_{TA\text{-offset}} + N_{TA,adj}^{common} + N_{TA,adj}^{UE}) \times T_c$.

The downlink timing is defined as the time when the first path (in time) of the corresponding downlink frame used by the UE to determine downlink timing is received from the reference cell at the UE antenna.

N_{TA} for PRACH is defined as 0. $(N_{TA} + N_{TA\text{-offset}} + N_{TA,adj}^{common} + N_{TA,adj}^{UE}) \times T_c$ (in T_c units) for other channels is the difference between UE transmission timing and the downlink timing immediately after when the last timing advance in clause 7.3C was applied, or after the last update in $N_{TA,adj}^{common}$ or $N_{TA,adj}^{UE}$.

The value of $N_{TA\text{-offset}}$ depends on the duplex mode of the cell in which the uplink transmission takes place and the frequency range (FR). $N_{TA\text{-offset}}$ is defined in Table 7.1.2-2.

$N_{TA,adj}^{common}$ and $N_{TA,adj}^{UE}$ are as defined in TS38.211 [6].

Table 7.1C.2-1: T_{e_NTN} Timing Error Limit

Frequency Range	SCS of SSB signals (kHz)	SCS of uplink signals (kHz)	T _{e,NTN}
1	15	15	29*64*T _c
		30	24*64*T _c
		60	N/A
	30	15	24*64*T _c
		30	22*64*T _c
		60	N/A
Note 1: T _c is the basic timing unit defined in TS 38 211 [6]			

When it is not the first transmission in a DRX cycle or there is no DRX cycle, and when it is the transmission for PUCCH, PUSCH and SRS transmission, the UE shall be capable of changing the transmission timing according to the received downlink frame of the reference cell, the updating of $N_{TA,adj}^{common}$ and the updating of $N_{TA,adj}^{UE}$, except when the timing advance in clause 7.3C is applied.

7.1C.2.1 Gradual timing adjustment

When the transmission timing error between the UE and the reference timing exceeds $\pm T_{e_NTN}$ then the UE shall adjust the timing such that timing error is within $\pm T_{e_NTN}$. The reference timing shall be $(N_{TA} + N_{TA_offset} + N_{TA,adj}^{common} + N_{TA,adj}^{UE}) \times T_c$ before the downlink timing of the reference cell. All adjustments made to the UE uplink timing shall follow these rules:

- 1) The maximum amount of the magnitude of the timing change, apart from a change of $N_{TA,adj}^{UE}$ due to satellite position update and $N_{TA,adj}^{common}$ between the previous transmission and the current transmission, in one adjustment shall be T_{q_NTN} .
- 2) The minimum aggregate adjustment rate, apart from a change of $N_{TA,adj}^{UE}$ due to satellite position update and $N_{TA,adj}^{common}$ during the last one second, shall be T_{p_NTN} per second.
- 3) The maximum aggregate adjustment rate, apart from a change of $N_{TA,adj}^{UE}$ due to satellite position update and $N_{TA,adj}^{common}$ during the last 200ms, shall be T_{q_NTN} per 200 ms.

Where, the maximum autonomous time adjustment step T_{q_NTN} and the aggregate adjustment rate T_{p_NTN} are specified in Table 7.1C.2.1-1.

Table 7.1C.2.1-1: T_{q_NTN} Maximum Autonomous Time Adjustment Step and T_{p_NTN} Minimum Aggregate Adjustment rate

Frequency Range	SCS of uplink signals (kHz)	T_{q_NTN}	T_{p_NTN}
1	15	$5.5 \cdot 64 \cdot T_c$	$5.5 \cdot 64 \cdot T_c$
	30	$5.5 \cdot 64 \cdot T_c$	$5.5 \cdot 64 \cdot T_c$
	60	N/A	N/A
NOTE: T_c is the basic timing unit defined in TS 38.211 [6]			

7.2 UE timer accuracy

7.2.1 Introduction

UE timers are used in different protocol entities to control the UE behaviour.

7.2.2 Requirements

For UE timers specified in TS 38.331 [2], the UE shall comply with the timer accuracies according to Table 7.2.2-1.

The requirements are only related to the actual timing measurements internally in the UE. They do not include the following:

- Inaccuracy in the start and stop conditions of a timer (e.g. UE reaction time to detect that start and stop conditions of a timer is fulfilled), or
- Inaccuracies due to restrictions in observability of start and stop conditions of a UE timer (e.g. slot alignment when UE sends messages at timer expiry).

Table 7.2.2-1

Timer value [s]	Accuracy
-----------------	----------

timer value < 4	$\pm 0.1s$
timer value ≥ 4	$\pm 2.5\%$

7.2A UE timer accuracy for RedCap

7.2A.1 Introduction

UE timers are used in different protocol entities to control the UE behaviour.

7.2A.2 Requirements

For UE timers specified in TS 38.331 [2], the UE shall comply with the timer accuracies according to Table 7.2A.2-1.

The requirements are only related to the actual timing measurements internally in the UE. They do not include the following:

- Inaccuracy in the start and stop conditions of a timer (e.g. UE reaction time to detect that start and stop conditions of a timer is fulfilled), or
- Inaccuracies due to restrictions in observability of start and stop conditions of a UE timer (e.g. slot alignment when UE sends messages at timer expiry).

Table 7.2A.2-1

Timer value [s]	Accuracy
timer value < 4	$\pm 0.1s$
timer value ≥ 4	$\pm 2.5\%$

7.2C UE timer accuracy for satellite access

7.2C.1 Introduction

UE timers are used in different protocol entities to control the UE behaviour.

7.2C.2 Requirements

For UE timers specified in TS 38.331 [2], the UE shall comply with the timer accuracies according to Table 7.2C.2-1.

The requirements are only related to the actual timing measurements internally in the UE. They do not include the following:

- Inaccuracy in the start and stop conditions of a timer (e.g. UE reaction time to detect that start and stop conditions of a timer is fulfilled), or
- Inaccuracies due to restrictions in observability of start and stop conditions of a UE timer (e.g. slot alignment when UE sends messages at timer expiry).

Table 7.2C.2-1

Timer value [s]	Accuracy
timer value < 4	$\pm 0.1s$
timer value ≥ 4	$\pm 2.5\%$

7.3 Timing advance

7.3.1 Introduction

The timing advance is initiated from gNB to UE in EN-DC, NR-DC, NE-DC and NR SA operation modes, with MAC message that implies the adjustment of the timing advance, as defined in clause 5.2 of TS 38.321 [7].

7.3.2 Requirements

7.3.2.1 Timing Advance adjustment delay

UE shall adjust the timing of its uplink transmission timing at time slot $n + k + 1$ for a timing advance command received in time slot n , and the value of k is defined in clause 4.2 in TS 38.213 [3]. The same requirement applies also when the UE is not able to transmit a configured uplink transmission due to the channel assessment procedure.

7.3.2.2 Timing Advance adjustment accuracy

The UE shall adjust the timing of its transmissions with a relative accuracy better than or equal to the UE Timing Advance adjustment accuracy requirement in Table 7.3.2.2-1, to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command step is defined in TS 38.213 [3].

Table 7.3.2.2-1: UE Timing Advance adjustment accuracy

UL Sub Carrier Spacing(kHz)	15	30	60	120	480	960
UE Timing Advance adjustment accuracy	$\pm 256 T_c$	$\pm 256 T_c$	$\pm 128 T_c$	$\pm 32 T_c$	$\pm 10 T_c$	$\pm 6 T_c$

7.3A Timing Advance for RedCap

7.3A.1 Introduction

The timing advance is initiated from gNB to UE configured with only PCell, with MAC message that implies the adjustment of the timing advance, as defined in clause 5.2 of TS 38.321 [7].

7.3A.2 Requirements

7.3A.2.1 Timing Advance adjustment delay

UE shall adjust the timing of its uplink transmission at time slot $n + k + 1$ for a timing advance command received in time slot n , and the value of k is defined in clause 4.2 in TS 38.213 [3]. The same requirement applies also when the UE is not able to transmit a configured uplink transmission due to the channel assessment procedure.

7.3A.2.2 Timing Advance adjustment accuracy

The UE shall adjust the timing of its transmissions with a relative accuracy better than or equal to the UE Timing Advance adjustment accuracy requirement in Table 7.3A.2.2-1, to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command step is defined in TS 38.213 [3].

Table 7.3A.2.2-1: UE Timing Advance adjustment accuracy

UL Sub Carrier Spacing(kHz)	15	30	60	120
UE Timing Advance adjustment accuracy	$\pm 256 T_c$	$\pm 256 T_c$	$\pm 128 T_c$	$\pm 32 T_c$

7.3C Timing advance for satellite access

7.3C.1 Introduction

The timing advance is initiated by UE configured with only PCell served by SAN, upon initiating a validity timer for $N_{TA,adj}^{common}$ and $N_{TA,adj}^{UE}$. The timing advance can be adjusted with MAC message that implies the adjustment of the timing advance, as defined in clause 5.2 of TS 38.321 [7].

7.3C.2 Requirements

7.3C.2.1 Timing Advance adjustment delay

UE shall adjust the timing of its uplink transmission timing from the beginning of uplink time slot $n + k + 1 + 2^\mu \cdot K_{offset}$ for a timing advance command received in time slot n , and the value of k , μ and K_{offset} are defined in clause 4.2 in TS 38.213 [3]. The same requirement applies also when the UE is not able to transmit a configured uplink transmission due to the channel assessment procedure.

7.3C.2.2 Timing Advance adjustment accuracy

The UE shall adjust the timing of its transmissions, apart from a change of $N_{TA,adj}^{UE}$ and $N_{TA,adj}^{common}$ between the preceding uplink transmission and the current transmission, with a relative accuracy better than or equal to the UE Timing Advance adjustment accuracy requirement in Table 7.3C.2.2-1, to the signalled timing advance value compared to the timing of preceding uplink transmission. The timing advance command step is defined in TS 38.213 [3].

Table 7.3C.2.2-1: UE Timing Advance adjustment accuracy

UL Sub Carrier Spacing(kHz)	15	30	60
UE Timing Advance adjustment accuracy	$\pm 256 T_c$	$\pm 256 T_c$	N/A

Editor's Note: it would be further clarified with the additional conditions for TA adjustment accuracy requirement for satellite access

7.4 Cell phase synchronization accuracy

7.4.1 Definition

Cell phase synchronization accuracy for TDD is defined as the maximum absolute deviation in frame start timing between any pair of cells on the same frequency that have overlapping coverage areas.

7.4.2 Minimum requirements

The cell phase synchronization accuracy measured at BS antenna connectors or radiated interface boundaries shall be better than 3 μ s.

7.5 Maximum Transmission Timing Difference

7.5.1 Introduction

A UE shall be capable of handling a relative transmission timing difference between subframe timing boundary of E-UTRA PCell and the closest slot timing boundary of PSCell to be aggregated for EN-DC operation.

A UE shall be capable of handling a relative transmission timing difference among the closest slot timing boundaries of different carriers in FR1 and/or FR2-1 to be aggregated in NR carrier aggregation.

A UE shall be capable of handling a relative transmission timing difference among the closest subframe timing boundaries of different carriers to be aggregated in FR1 and FR2-2 NR inter-band carrier aggregation.

A UE shall be capable of handling a relative transmission timing difference between slot timing boundary of PCell and subframe timing boundary of E-UTRA PSCell to be aggregated for NE-DC operation.

A UE shall be capable of handling a relative transmission timing difference between slot timing boundaries of PCell in FR1 or FR2-1 and the closest slot timing boundary of PSCell in FR1 or FR2-1 to be aggregated in NR DC operation.

A UE shall be capable of handling a relative transmission timing difference between subframe timing boundaries of PCell in FR1 and the closest subframe timing boundary of PSCell in FR2-2 to be aggregated in NR DC operation.

7.5.2 Minimum Requirements for inter-band EN-DC

The UE shall be capable of handling a maximum uplink transmission timing difference between E-UTRA PCell and PSCell as shown in Table 7.5.2-1.

Table 7.5.2-1 Maximum uplink transmission timing difference requirement for asynchronous EN-DC

Sub-carrier spacing in E-UTRA PCell (kHz)	UL Sub-carrier spacing for data in PSCell (kHz)	Maximum uplink transmission timing difference (μs)
15	15	500
15	30	250
15	60	125
15	120 ^{Note1}	62.5
NOTE 1: For E-UTRA FDD-NR FDD intra-band EN-DC, for which the requirement is defined in clause 7.5.3 and this Table 7.5.2-1 is also applicable, the scenario with 120kHz PSCell does not exist.		

Table 7.5.2-2 Void

7.5.2.1 Minimum Requirements for inter-band synchronous EN-DC

The requirements in this clause apply as a reference for inter-band synchronous EN-DC.

The UE shall be capable of handling a maximum uplink transmission timing difference (MTTD) between E-UTRA PCell and PSCell for inter-band synchronous EN-DC as shown in Table 7.5.2.1-1 1. The requirements for synchronous EN-DC are applicable for E-UTRA TDD-NR TDD, E-UTRA FDD-NR FDD, E-UTRA TDD-NR FDD and E-UTRA FDD-NR TDD inter-band EN-DC.

For E-UTRA TDD-NR TDD inter-band EN-DC with overlapping or partially overlapping DL bands, only synchronized operation is assumed. The UE shall be capable of handling a maximum uplink transmission timing difference (MTTD) between E-UTRA PCell and PSCell as shown in Table 7.5.2.1-1 provided that UE indicates that it is capable of *interBandMRDC-WithOverlapDL-Bands-r16*, and in Table 7.5.3-1 provided that UE does not indicate it is capable of *interBandMRDC-WithOverlapDL-Bands-r16*.

For E-UTRA FDD-NR FDD inter-band EN-DC with overlapping DL bands, only synchronized operation is assumed if UE does not indicate that it is capable of asynchronous FDD-FDD EN-DC operation. The UE shall be capable of handling a maximum uplink transmission timing difference (MTTD) between E-UTRA PCell and PSCell as shown in Table 7.5.2.1-1 if UE indicates that it is capable of *interBandMRDC-WithOverlapDL-Bands-r16*, and in Table 7.5.3-1 provided that UE does not indicate it is capable of *interBandMRDC-WithOverlapDL-Bands-r16*.

Table 7.5.2.1-1 Maximum uplink transmission timing difference requirement for inter-band synchronous EN-DC

Sub-carrier spacing in E-UTRA PCell (kHz)	UL Sub-carrier spacing for data in PSCell (kHz)	Maximum uplink transmission timing difference (μs)
15	15	35.21
15	30	35.21
15	60	35.21
15	120	35.21

7.5.3 Minimum Requirements for intra-band EN-DC

For intra-band EN-DC, only co-located deployment is applied.

The UE shall be capable of handling a maximum uplink transmission timing difference (MTTD) between E-UTRA PCell and PSCell as shown in Table 7.5.2-1 for E-UTRA FDD-NR FDD intra-band EN-DC provided the UE indicates that it is capable of asynchronous EN-DC operation [2].

The UE shall be capable of handling a maximum uplink transmission timing difference (MTTD) between E-UTRA PCell and PSCell as shown in Table 7.5.3-1 for E-UTRA TDD-NR TDD and E-UTRA FDD-NR FDD intra-band EN-DC provided the UE does not indicate that it is capable of asynchronous FDD-FDD EN-DC operation [16].

Table 7.5.3-1: Maximum uplink transmission timing difference requirement for intra-band synchronous EN-DC

Sub-carrier spacing in E-UTRA PCell (kHz)	UL Sub-carrier spacing for data in PSCell (kHz)	Maximum uplink transmission timing difference (μs)
15	15	5.21 ^{Note 1, Note 2}
15	30	5.21 ^{Note 2}
15	60	5.21 ^{Note 2}
NOTE 1: This is not applicable for a UE which indicates the capability of only supporting single UL timing (<i>ul-TimingAlignmentEUTRA-NR</i> is signalled). Single UL timing for E-UTRA and NR cell is assumed for this UE. NOTE 2: If the transmission timing difference exceeds the cyclic prefix length of the UL Sub-carrier spacing for data in PSCell, NR UE Tx EVM degradation is expected for the symbol that is overlapping the LTE subframe boundary. NOTE 3: The requirement in this table is also applicable for intra-band synchronous NE-DC.		

7.5.4 Minimum Requirements for NR Carrier Aggregation

The UE shall be capable of handling at least a relative transmission timing difference between slot timing of all pairs of TAGs in FR1 and/or FR2-1 as shown in Table 7.5.4-1, provided that the UE is:

- configured with the pTAG and the sTAG for inter-band NR carrier aggregation in SA or NR-DC mode, or
- configured with more than one sTAG for inter-band NR carrier aggregation in EN-DC or NE-DC mode.

The UE shall be capable of handling at least a relative transmission timing difference between subframe timing of all pairs of TAGs between FR1 and FR2-2 as shown in Table 7.5.4-1, provided that the UE is:

- configured with the pTAG and the sTAG for inter-band NR carrier aggregation in SA or NR-DC mode.

Table 7.5.4-1: Maximum uplink transmission timing difference requirement for inter-band NR carrier aggregation

Frequency Range of the pair of TAGs	Maximum uplink transmission timing difference (μs)
FR1	34.6
FR2-1	8.5 ^{Note1}
Between FR1 and FR2-1	26.1
Between FR1 and FR2-2	26.1
Note1: This requirement applies to the UE capable of independent beam management for FR2-1 inter-band CA.	

7.5.5 Minimum Requirements for inter-band NE-DC

The UE shall be capable of handling a maximum uplink transmission timing difference between PCell and E-UTRA PSCell as shown in Table 7.5.5-1 for inter-band asynchronous NE-DC.

Table 7.5.5-1: Maximum uplink transmission timing difference requirement for inter-band asynchronous NE-DC

Sub-carrier spacing in PCell (kHz)	UL Sub-carrier spacing for data in E-UTRA PSCell (kHz)	Maximum uplink transmission timing difference (μs)
15	15	500
30	15	250
60	15	125
120	15	62.5
NOTE 1: Void		

Table 7.5.5-2 Void

7.5.5.1 Minimum Requirements for inter-band synchronous NE-DC

The requirements in this clause apply as a reference for inter-band synchronous NE-DC.

The UE shall be capable of handling a maximum uplink transmission timing difference (MTTD) between PCell and E-UTRA PSCell for inter-band synchronous NE-DC as shown in Table 7.5.5.1-1. The requirements for synchronous NE-DC are applicable for NR TDD- E-UTRA TDD, NR FDD- E-UTRA FDD, NR TDD- E-UTRA FDD and NR FDD- E-UTRA TDD inter-band NE-DC.

For NR FDD-E-UTRA FDD inter-band NE-DC with overlapping DL bands, only synchronized operation is assumed if UE does not indicate that it is capable of asynchronous FDD-FDD NE-DC operation. The UE shall be capable of handling a maximum uplink transmission timing difference (MTTD) between NR PCell and PSCell as shown in Table 7.5.5.1-1 if UE indicates that it is capable of *interBandMRDC-WithOverlapDL-Bands-r16*, and the same requirement as in Table 7.5.3-1 apply provided that UE does not indicate it is capable of *interBandMRDC-WithOverlapDL-Bands-r16*.

Table 7.5.5.1-1: Maximum uplink transmission timing difference requirement for inter-band synchronous NE-DC

Sub-carrier spacing in PCell (kHz)	UL Sub-carrier spacing for data in E-UTRA PSCell (kHz)	Maximum uplink transmission timing difference (μs)
15	15	35.21
30	15	35.21
60	15	35.21

120	15	35.21
-----	----	-------

7.5.6 Minimum Requirements for inter-band NR DC

The UE shall be capable of handling a maximum uplink transmission timing difference (MTTD) between PCell and PSCell as shown in Table 7.5.6-1 provided that the UE indicates that it is capable of synchronous NR DC only [14].

Table 7.5.6-1: Maximum uplink transmission timing difference requirement for inter-band synchronous NR DC

Frequency Range		Maximum uplink transmission timing difference (μs)
Cell in MCG	Cell in SCG	
FR1	FR1	34.6
FR2-1	FR2-1	8.5
FR1	FR2-1	34.1
FR1	FR2-2	34.1

The UE shall be capable of handling a maximum uplink transmission timing difference (MTTD) between PCell and PSCell as shown in Table 7.5.6-2 provided that the UE indicates that it is capable of asynchronous NR DC [14].

Table 7.5.6-2 Maximum uplink transmission timing difference requirement for inter-band asynchronous NR DC

Max {Sub-carrier spacing in PCell (kHz), Sub-carrier spacing in PSCell (kHz)}	Maximum uplink transmission timing difference (μs)
15	500
30	250
60	125
120	62.5
480	15.625
960	7.8125

7.6 Maximum Receive Timing Difference

7.6.1 Introduction

A UE shall be capable of handling a relative receive timing difference between subframe timing boundary of an E-UTRA cell belonging to the MCG and the closest slot timing boundary of a cell belonging to SCG to be aggregated for EN-DC operation.

A UE shall be capable of handling a relative receive timing difference between subframe timing boundary of an E-UTRA cell belonging to the SCG to be aggregated for NE-DC operation and the closest slot timing boundary of a cell belonging to MCG.

A UE shall be capable of handling a relative receive timing difference between slot timing boundary of a cell belonging to MCG in FR1 or FR2-1 and the closest slot timing boundary of a cell belonging to the SCG FR1 or FR2-1 to be aggregated for NR DC operation.

A UE shall be capable of handling a relative receive timing difference between subframe timing boundary of a cell belonging to MCG in FR1 and the closest subframe timing boundary of a cell belonging to the SCG in FR2-2 to be aggregated for NR DC operation.

A UE shall be capable of handling a relative receive timing difference among the closest slot timing boundaries of different carriers in FR1 and/or FR2-1 to be aggregated in NR carrier aggregation.

A UE shall be capable of handling a relative receive timing difference among the closest subframe timing boundaries of different carriers to be aggregated in FR1 and FR2-2 NR inter-band carrier aggregation.

The requirements defined in clause 7.6 are also applicable when UE is configured to receive multiple PDSCH transmission occasions from one or more QCL sources on any one of the aggregated NR carriers.

7.6.2 Minimum Requirements for inter-band EN-DC

The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from a E-UTRA cell belonging to the MCG and slot timing of signal from a cell belonging to SCG at the UE receiver as shown in Table 7.6.2-1.

Table 7.6.2-1: Maximum receive timing difference requirement for asynchronous EN-DC

Sub-carrier spacing of E-UTRA cell in MCG (kHz)	DL Sub-carrier spacing of cell in SCG (kHz) (Note 1)	Maximum receive timing difference (μs)
15	15	500
15	30	250
15	60	125
15	120 ^{Note2}	62.5
NOTE 1: DL Sub-carrier spacing is min{SCS _{SS} , SCS _{DATA} }.		
NOTE 2: For E-UTRA FDD-NR FDD intra-band EN-DC, for which the requirement is defined in clause 7.6.3 and this Table 7.6.2-1 is also applicable, the scenario with 120 kHz does not exit.		

Table 7.6.2-2 Void

Table 7.6.2-3 Void

7.6.2.1 Minimum Requirements for inter-band synchronous EN-DC

The requirements in this clause apply as a reference for inter-band synchronous EN-DC.

The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from an E-UTRA cell belonging to the MCG and slot timing of signal from a cell belonging to SCG at the UE receiver for inter-band synchronous EN-DC as shown in Table 7.6.2.1-1. The requirements for synchronous EN-DC are applicable for E-UTRA TDD-NR TDD, E-UTRA FDD-NR FDD, E-UTRA TDD-NR FDD and E-UTRA FDD-NR TDD inter-band EN-DC.

For E-UTRA TDD-NR TDD inter-band EN-DC with overlapping or partially overlapping DL bands, only synchronized operation is assumed. The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from a E-UTRA cell belonging to the MCG and slot timing of signal from a cell belonging to the SCG at the UE receiver as shown in Table 7.6.2.1-1 provided that UE indicates that it is capable of *interBandMRDC-WithOverlapDL-Bands-r16*, and in Table 7.6.3-1 provided that UE does not indicate it is capable of *interBandMRDC-WithOverlapDL-Bands-r16*.

For E-UTRA FDD-NR FDD inter-band EN-DC with overlapping DL bands, only synchronized operation is assumed if UE does not indicate that it is capable of asynchronous FDD-FDD EN-DC operation. The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from a E-UTRA cell belonging to the MCG and slot timing of signal from a cell belonging to the SCG at the UE receiver as shown in Table 7.6.2.1-1 provided that UE indicates that it is capable of *interBandMRDC-WithOverlapDL-Bands-r16*, and in Table 7.6.3-1 provided that UE does not indicate it is capable of *interBandMRDC-WithOverlapDL-Bands-r16*.

Table 7.6.2.1-1: Maximum receive timing difference requirement for inter-band synchronous EN-DC

Sub-carrier spacing of E-UTRA cell in MCG (kHz)	DL Sub-carrier spacing of cell in SCG (kHz) (Note1)	Maximum receive timing difference (μs)
15	15	33
15	30	
15	60	
15	120	
Note 1: DL Sub-carrier spacing is min{SCS _{SS} , SCS _{DATA} }.		

7.6.3 Minimum Requirements for intra-band EN-DC

For intra-band EN-DC, only co-located deployment is applied.

The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from a E-UTRA cell belonging to the MCG and slot timing of signal from a cell belonging to the SCG as shown in Table 7.6.2-1 for E-UTRA FDD-NR FDD intra-band EN-DC provided the UE indicates that it is capable of asynchronous EN-DC operation [2].

The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from a E-UTRA cell belonging to the MCG and slot timing of signal from a cell belonging to the SCG as shown in Table 7.6.3-1 for E-UTRA FDD-NR FDD and E-UTRA TDD-NR TDD intra-band EN-DC provided the UE does not indicate that it is capable of asynchronous FDD-FDD EN-DC operation [16].

Table 7.6.3-1 Maximum receive timing difference requirement for intra-band synchronous EN-DC

Sub-carrier spacing of E-UTRA cell in MCG (kHz)	DL Sub-carrier spacing of cell in SCG (kHz) ^{Note1}	Maximum receive timing difference (μs)
15	15	3
15	30	3
15	60	3
NOTE 1: DL Sub-carrier spacing is min{SCS _{SS} , SCS _{DATA} }.		
NOTE 2: The requirement in this table is also applicable for intra-band synchronous NE-DC.		

Table 7.6.3-2: Void

7.6.4 Minimum Requirements for NR Carrier Aggregation

For intra-band CA, only co-located deployment is applied. For intra-band non-contiguous NR carrier aggregation, the UE shall be capable of handling at least a relative receive timing difference between slot timing of different carriers to be aggregated at the UE receiver as shown in Table 7.6.4-1 below.

Table 7.6.4-1: Maximum receive timing difference requirement for intra-band non-contiguous NR carrier aggregation

Frequency Range	Maximum receive timing difference (μs)
FR1	3 ¹
FR2-1	0.26
Note 1: In the case of different SCS on different CCs, if the receive time difference exceeds the cyclic prefix length of that SCS, demodulation performance degradation is expected for the first symbol of the slot.	

For inter-band NR carrier aggregation,

- the UE shall be capable of handling at least a relative receive timing difference between slot timing of all pairs of carriers in FR1 and FR2-1 to be aggregated at the UE receiver as shown in Table 7.6.4-2 below.
- the UE shall be capable of handling at least a relative receive timing difference between subframe timing of all pairs of carriers in FR1 and FR2-2 to be aggregated at the UE receiver as shown in Table 7.6.4-2 below.

Table 7.6.4-2: Maximum receive timing difference requirement for inter-band NR carrier aggregation

Frequency Range of the pair of carriers	Maximum receive timing difference (μ s)
FR1	33
FR2-1	8 ^{note1}
Between FR1 and FR2-1	25
Between FR1 and FR2-2	25
Note1: This requirement applies to the UE capable of independent beam management for FR2-1 inter-band CA.	

7.6.5 Minimum Requirements for inter-band NE-DC

The UE shall be capable of handling at least a relative receive timing difference between slot timing of signal from a cell belonging to the MCG and subframe timing of signal from an E-UTRA cell belonging to the SCG at the UE receiver for asynchronous NE-DC as shown in Table 7.6.5-1.

Table 7.6.5-1: Maximum receive timing difference requirement for asynchronous NE-DC

Sub-carrier spacing of cell in MCG (kHz)	DL Sub-carrier spacing of EUTRA cell in SCG (kHz) (Note 1)	Maximum receive timing difference (μ s)
15	15	500
30	15	250
60	15	125
120	15	62.5
NOTE 1: DL Sub-carrier spacing is $\min\{SCS_{SS}, SCS_{DATA}\}$.		
NOTE 2: Void		

Table 7.6.5-2: Void

7.6.5.1 Minimum Requirements for inter-band synchronous NE-DC

The requirements in this clause apply as a reference for inter-band synchronous NE-DC.

The UE shall be capable of handling at least a relative receive timing difference between slot timing of signal from a cell belonging to the MCG and subframe timing of signal from a E-UTRA cell belonging to the SCG at the UE receiver for inter-band synchronous NE-DC as shown in Table 7.6.5.1-1. The requirements for synchronous NE-DC are applicable for NR TDD- E-UTRA TDD, NR FDD- E-UTRA FDD, NR TDD- E-UTRA FDD and NR FDD- E-UTRA TDD inter-band NE-DC.

For NR FDD-E-UTRA FDD inter-band NE-DC with overlapping DL bands, only synchronized operation is assumed if UE does not indicate that it is capable of asynchronous FDD-FDD NE-DC operation. The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from a cell belonging to the MCG and slot timing of signal from a cell belonging to the SCG at the UE receiver as shown in Table 7.6.2.1-1 provided that UE indicates that it is capable of *interBandMRDC-WithOverlapDL-Bands-r16*, and the same requirement as in Table 7.6.3-1 apply provided that UE does not indicate it is capable of *interBandMRDC-WithOverlapDL-Bands-r16*.

Table 7.6.5.1-1: Maximum receive timing difference requirement for inter-band synchronous NE-DC

Sub-carrier spacing of cell in MCG (kHz)	DL Sub-carrier spacing of EUTRA cell in SCG (kHz) (Note1)	Maximum receive timing difference (μ s)
15	15	33
30	15	
60	15	
120	15	

7.6.6 Minimum Requirements for inter-band NR DC

The UE shall be capable of handling at least a relative receive timing difference between slot timing of signal from a cell belonging to the MCG in FR1 or FR2-1 and slot timing of signal from a cell belonging to the SCG in FR1 or FR2-1 at the UE receiver as shown in Table 7.6.6-1 provided that the UE indicates that it is capable of synchronous NR DC only [16].

The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from a cell belonging to the MCG in FR1 and subframe timing of signal from a cell belonging to the SCG in FR2-2 at the UE receiver as shown in Table 7.6.6-1 provided that the UE indicates that it is capable of synchronous NR DC only [16].

Table 7.6.6-1: Maximum receive timing difference requirement for inter-band synchronous NR DC

Frequency Range		Maximum receive timing difference (μs)
Cell in MCG	Cell in SCG	
FR1	FR1	33
FR2-1	FR2-1	8
FR1	FR2-1	33
FR1	FR2-2	33

The UE shall be capable of handling at least a relative receive timing difference between slot timing of signal from a cell belonging to the MCG in FR1 or FR2-1 and slot timing of signal from a cell belonging to the SCG in FR1 or FR2-1 at the UE receiver as shown in Table 7.6.6-2 provided that the UE indicates that it is capable of asynchronous NR DC [16].

The UE shall be capable of handling at least a relative receive timing difference between subframe timing of signal from a cell belonging to the MCG in FR1 and subframe timing of signal from a cell belonging to the SCG in FR2-2 at the UE receiver as shown in Table 7.6.6-2 provided that the UE indicates that it is capable of asynchronous NR DC [16].

Table 7.6.6-2 Maximum receive timing difference requirement for inter-band asynchronous NR DC

Max {Sub-carrier spacing in PCell (kHz), Sub-carrier spacing in PSCell (kHz)}	Maximum receive timing difference (μs)
15	500
30	250
60	125
120	62.5
480	15.625
960	7.8125

7.7 *deriveSSB-IndexFromCell* tolerance

7.7.1 Minimum requirements

When *deriveSSB-IndexFromCell* is enabled, the UE assumes frame boundary alignment (including half frame, subframe and slot boundary alignment) across cells on the same frequency carrier is within a tolerance not worse than

- min (2 SSB symbols, 1 PDSCH symbol) for sub-carrier spacings of SSB and PDSCH up-to 240 kHz,
- min (3 SSB symbols, N_{PDSCH} PDSCH symbols) for sub-carrier spacing of 480 kHz and 960kHz of either SSB or PDSCH where N_{PDSCH} is defined in Table 7.7.1-1

and the SFNs of all cells on the same frequency carrier are the same.

Table 7.7.1-1 N_{PDSCH} when *deriveSSB-IndexFromCell* is enabled

SSB SCS (KHz)	PDSCH SCS (KHz)	N_{PDSCH}
120	480	3
120	960	6
480	120	1
480	480	3
480	960	6
960	120	1
960	480	2
960	960	3

When *deriveSSB-IndexFromCell* is not enabled, the UE assumes frame boundary alignment (including half frame, subframe and slot boundary alignment) across cells on the same frequency carrier is within a tolerance not worse than 6 SSB symbols for sub-carrier spacing of 960kHz and the SFNs of all cells on the same frequency carrier are the same.

7.7A *deriveSSB-IndexFromCell* tolerance for RedCap

7.7A.1 Minimum requirements

When *deriveSSB-IndexFromCell* is enabled, the RedCap UE assumes frame boundary alignment (including half frame, subframe and slot boundary alignment) across cells on the same frequency carrier is within a tolerance not worse than min(2 SSB symbols, 1 PDSCH symbol) and the SFNs of all cells on the same frequency carrier are the same.

7.8 Void

7.9 *deriveSSB-IndexFromCellInter-r17* tolerance

7.9.1 Minimum requirements

When *deriveSSB-IndexFromCellInter-r17* is enabled, the UE assumes frame boundary alignment (including half frame, subframe and slot boundary alignment) across cells on the target carrier and reference cell is within a tolerance not worse than min(2 SSB symbols of target carrier, 1 PDSCH symbol of the reference cell) and the SFNs of all cells on the target carrier and reference cell are the same. The reference cell is the serving cell which is used for SSB indexes derivation as indicated via *deriveSSB-IndexFromCellInter-r17*.

8 Signalling characteristics

8.1 Radio Link Monitoring

8.1.1 Introduction

The requirements in clause 8.1 apply for radio link monitoring on:

- PCell in SA NR, NR-DC and NE-DC operation mode,
- PSCell in NR-DC and EN-DC operation mode,
- Deactivated PSCell in NR-DC and EN-DC operation mode, when configured.

The UE shall monitor the downlink radio link quality based on the reference signal configured as RLM-RS resource(s) in order to detect the downlink radio link quality of the PCell, PSCell and deactivated PSCell if configured with *bfd-and-RLM* as specified in TS 38.331[2] with value *true* as specified in TS 38.213 [3]. The configured RLM-RS resources can be all SSBs, or all CSI-RSs, or a mix of SSBs and CSI-RSs. UE is not required to perform RLM outside the active DL BWP.

On each RLM-RS resource, the UE shall estimate the downlink radio link quality and compare it to the thresholds Q_{out} and Q_{in} for the purpose of monitoring downlink radio link quality of the cell.

When a CORESET that the UE uses for monitoring PDCCH includes two TCI states and the UE is provided *sfnSchemePdcch* set to 'sfnSchemeA' or 'sfnSchemeB', the UE shall estimate a single downlink radio link quality to derive single SNR and compare it to the single thresholds Q_{out} and Q_{in} for the purpose of monitoring downlink radio link quality of the cell(s). How to compute the single SNR based on two active TCI states is up to UE implementation.

The threshold Q_{out} is defined as the level at which the downlink radio link cannot be reliably received and shall correspond to the out-of-sync block error rate ($BLER_{out}$) as defined in Table 8.1.1-1. For SSB based radio link monitoring, Q_{out_SSB} is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1.2.1-1. For CSI-RS based radio link monitoring, Q_{out_CSI-RS} is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1.3.1-1.

The threshold Q_{in} is defined as the level at which the downlink radio link quality can be received with significantly higher reliability than at Q_{out} and shall correspond to the in-sync block error rate ($BLER_{in}$) as defined in Table 8.1.1-1. For SSB based radio link monitoring, Q_{in_SSB} is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1.2.1-2. For CSI-RS based radio link monitoring, Q_{in_CSI-RS} is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1.3.1-2.

The out-of-sync block error rate ($BLER_{out}$) and in-sync block error rate ($BLER_{in}$) are determined from the network configuration via parameter *rlmInSyncOutOfSyncThreshold* signalled by higher layers. When UE is not configured with *rlmInSyncOutOfSyncThreshold* from the network, UE determines out-of-sync and in-sync block error rates from Configuration #0 in Table 8.1.1-1 by default. All requirements in clause 8.1 are applicable for BLER Configuration #0 in Table 8.1.1-1.

Table 8.1.1-1: Out-of-sync and in-sync block error rates

Configuration	$BLER_{out}$	$BLER_{in}$
0	10%	2%

UE shall be able to monitor up to N_{RLM} RLM-RS resources of the same or different types in each corresponding carrier frequency range, depending on a maximum number L_{max} of SSBs per half frame according to TS 38.213 [3], where N_{RLM} is specified in Table 8.1.1-2 according TS 38.213 [3], and meet the requirements as specified in clause 8.1. UE is not required to meet the requirements in clause 8.1 if RLM-RS is not configured and no TCI state for PDCCH is activated.

Table 8.1.1-2: Maximum number of RLM-RS resources N_{RLM}

Carrier frequency range of PCell/PSCell	L_{max}	Maximum number of RLM-RS resources, N_{RLM}
FR1, ≤ 3 GHz ^{Note}	4	2
FR1, > 3 GHz ^{Note}	8	4
FR2	64	8
NOTE: For unpaired spectrum operation with Case C - 30 kHz SCS, 3GHz is replaced by 1.88GHz, as specified in clause 4.1 in TS 38.213 [3].		

8.1.1.1 Introduction of Requirement on Radio Link Monitoring for UE Configured with Relaxed Measurement Criteria

For the UE supports *rlm-Relaxation-r17* and configured with explicit signaling *goodServingCellEvaluationRLM*, which is always configured to the UE when the network enables RLM relaxation for the UE as specified in TS 38.331 [2], the relaxed requirements defined in clause 8.1.2.4 for SSB based radio link monitoring and the relaxed requirements defined in clause 8.1.3.4 for CSI-RS based radio link monitoring are allowed to apply to the relaxed RLM measurements on SpCell after fulfilling the following conditions:

- for the serving cells in intra-band carrier aggregation configured with SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on SCell, when
 - the good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the serving cell based on the measurements that are configured for SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on SCell in the intra-band carrier aggregation if the *lowMobilityEvaluationConnected* is not configured, or
 - the UE is also configured with *lowMobilityEvaluationConnected* and both low mobility criterion defined in clause 5.7.13.1 of TS 38.331 [2] is fulfilled for a period of $T_{SearchDeltaP-Connected}$ and good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the serving cell based on the measurements that are configured for SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on SCell in the intra-band carrier aggregation.
- for other serving cells, when
 - the good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the SpCell if the *lowMobilityEvaluationConnected* is not configured, or
 - the UE is also configured with *lowMobilityEvaluationConnected* and both low mobility criterion defined in clause 5.7.13.1 of TS 38.331 [2] is fulfilled for a period of $T_{SearchDeltaP-Connected}$ and good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the SpCell.

otherwise, UE shall apply the requirements defined in clause 8.1.2.2 for SSB based radio link monitoring and the requirements defined in clause 8.1.3.2 for CSI-RS based radio link monitoring. Note that when multiple resources are configured on a serving cell for RLM or BFD evaluation, the good serving cell quality criterion is considered as fulfilled for the serving cell when any resource configured for the cell fulfills the good serving defined in clause 5.7.13.2 of TS 38.331 [2].

The UE is no longer allowed to relax RLM measurements and apply the relaxed radio link monitoring provided that at least one of the following conditions is met:

- The UE sends out-of sync indications to the higher layers,
- The timer T310 is running.
- No DRX is configured or configured DRX cycle is longer than 80ms

Note: Applicability of DRX configuration follows TS38.331 Clause 5.7.13.0.

8.1.2 Requirements for SSB based radio link monitoring

8.1.2.1 Introduction

The requirements in this clause apply for each SSB based RLM-RS resource configured for PCell, PSCell or deactivated PSCell, provided that the SSB configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.1.2.2.

Table 8.1.2.1-1: PDCCH transmission parameters for out-of-sync evaluation

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	4dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

Table 8.1.2.1-2: PDCCH transmission parameters for in-sync evaluation

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	4
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.1.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_out_SSB}}$ [ms] period becomes worse than the threshold $Q_{\text{out_SSB}}$ within $T_{\text{Evaluate_out_SSB}}$ [ms] evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_in_SSB}}$ [ms] period becomes better than the threshold $Q_{\text{in_SSB}}$ within $T_{\text{Evaluate_in_SSB}}$ [ms] evaluation period.

$T_{\text{Evaluate_out_SSB}}$ and $T_{\text{Evaluate_in_SSB}}$ are defined in Table 8.1.2.2-1 for FR1.

$T_{\text{Evaluate_out_SSB}}$ and $T_{\text{Evaluate_in_SSB}}$ are defined in Table 8.1.2.2-2 for FR2 with scaling factor $N=8$ for FR2-1 and $N=12$ for FR2-2, for FR2 power classes other than power class 6 or for FR2 power class 6 when *highSpeedMeasFlagFR2-r17* is not configured

$T_{\text{Evaluate_out_SSB}}$ and $T_{\text{Evaluate_in_SSB}}$ are defined in Table 8.1.2.2-3 for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*.

$T_{\text{Evaluate_out_SSB}}$ and $T_{\text{Evaluate_in_SSB}}$ are defined in Table 8.1.2.2-4 for FR1 (deactivated PSCell).

$T_{\text{Evaluate_out_SSB}}$ and $T_{\text{Evaluate_in_SSB}}$ are defined in Table 8.1.2.2-5 for FR2 (deactivated PSCell) with scaling factor $N=8$ for FR2-1 and $N=12$ for FR2-2.

For a UE supporting *concurrentMeasGap-r17* and when concurrent measurement gaps are configured,

- P value for an RLM-RS resource to be measured is defined as
 - $N_{\text{total}} / N_{\text{outside_MG}}$ in FR1
 - $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ in FR2 with $N_{\text{available}} = 0$
 - $N_{\text{total}} / N_{\text{available}}$ in FR2 with $N_{\text{available}} > 0$
- For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any RLM-RS resource occasion:
 - N_{total} is the total number of RLM-RS resource occasions within the window W, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
 - $N_{\text{outside_MG}}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
 - $N_{\text{available}}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W
 - T_{L1} is periodicity of the target RLM-RS.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent measurement gaps are not configured,

For FR1,

- $P = \frac{1}{1 - \frac{T_{SSB}}{xRP}}$, when in the monitored cell there are GAPS configured for intra-frequency, inter-frequency or inter-RAT measurements, and these GAPS are overlapping with some but not all occasions of the SSB; and
- $P = 1$ when in the monitored cell there are no GAPS overlapping with any occasion of the SSB.

For FR2

- $P = \frac{1}{1 - \frac{T_{SSB}}{T_{SMTCperiod}}}$, when RLM-RS resource is not overlapped with GAP and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).
- P is $P_{\text{sharing factor}}$, when the RLM-RS resource is not overlapped with GAP and RLM-RS resource is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$).
- $P = \frac{1}{1 - \frac{T_{SSB}}{xRP} - \frac{T_{SSB}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with GAP and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and
 - $T_{SMTCperiod} \neq xRP$ or
 - $T_{SMTCperiod} = xRP$ and $T_{SSB} < 0.5 * T_{SMTCperiod}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{SSB}}{xRP}}$, when the RLM-RS is partially overlapped with GAP and the RLM-RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and $T_{SMTCperiod} = xRP$ and $T_{SSB} = 0.5 \times T_{SMTCperiod}$

- $P = \frac{1}{1 - \frac{T_{SSB}}{\text{Min}(xRP, T_{SMTCperiod})}}$, when the RLM-RS resource is partially overlapped with GAP and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with GAP
- $P = \frac{P_{sharing factor}}{1 - \frac{T_{SSB}}{xGP}}$, when the RLM-RS resource is partially overlapped with GAP and the RLM-RS resource is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with GAP ($T_{SMTCperiod} < xRP$)

where,

- $P_{sharing factor} = 1$, if the RLM-RS resource outside gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
 - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{sharing factor} = 3$, otherwise.
- If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.
- When a measurement gap is configured and the measurement gap is not NCSG,
 - an RLM-RS resource or an SMTC occasion is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and
 - $xRP = MGRP$
- Otherwise, when NCSG measurement gap is configured,
 - an RLM-RS resource or an SMTC occasion is considered to be overlapped with the GAP if
 - it overlaps the VIL1 or VIL2 of NCSG, or
 - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,
 - and
 - $xRP = VIRP$
- If the UE is configured with Pre-MG, an RLM-RS resource or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.
- When concurrent gaps are configured, an RLM-RS resource or an SMTC occasion is not considered as overlapped by a gap occasion if the gap occasion is dropped according to clause 9.1.8.

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and GAP configurations does not meet previous conditions

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

Table 8.1.2.2-1: Evaluation period $T_{\text{Evaluate_out_SSB}}$ and $T_{\text{Evaluate_in_SSB}}$ for FR1

Configuration	$T_{\text{Evaluate_out_SSB}}$ (ms)	$T_{\text{Evaluate_in_SSB}}$ (ms)
no DRX	$\text{Max}(200, \text{Ceil}(10 \times P) \times T_{\text{SSB}})$	$\text{Max}(100, \text{Ceil}(5 \times P) \times T_{\text{SSB}})$
DRX cycle ≤ 320 ms	$\text{Max}(200, \text{Ceil}(15 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$	$\text{Max}(100, \text{Ceil}(7.5 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle > 320 ms	$\text{Ceil}(10 \times P) \times T_{\text{DRX}}$	$\text{Ceil}(5 \times P) \times T_{\text{DRX}}$
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

Table 8.1.2.2-2: Evaluation period $T_{\text{Evaluate_out_SSB}}$ and $T_{\text{Evaluate_in_SSB}}$ for FR2

Configuration	$T_{\text{Evaluate_out_SSB}}$ (ms)	$T_{\text{Evaluate_in_SSB}}$ (ms)
no DRX	$\text{Max}(200, \text{Ceil}(10 \times P \times N) \times T_{\text{SSB}})$	$\text{Max}(100, \text{Ceil}(5 \times P \times N) \times T_{\text{SSB}})$
DRX cycle ≤ 320 ms	$\text{Max}(200, \text{Ceil}(15 \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$	$\text{Max}(100, \text{Ceil}(7.5 \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle > 320 ms	$\text{Ceil}(10 \times P \times N) \times T_{\text{DRX}}$	$\text{Ceil}(5 \times P \times N) \times T_{\text{DRX}}$
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

Table 8.1.2.2-3: Evaluation period $T_{\text{Evaluate_out_SSB}}$ and $T_{\text{Evaluate_in_SSB}}$ for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*

Configuration	$T_{\text{Evaluate_out_SSB}}$ (ms)	$T_{\text{Evaluate_in_SSB}}$ (ms)
no DRX	$\text{Max}(200, \text{Ceil}(10 \times P \times N^{\text{Note2}}) \times T_{\text{SSB}})$	$\text{Max}(100, \text{Ceil}(5 \times P \times N^{\text{Note2}}) \times T_{\text{SSB}})$
DRX cycle ≤ 80 ms	$\text{Max}(200, \text{Ceil}(15 \times P \times N^{\text{Note2}}) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$	$\text{Max}(100, \text{Ceil}(7.5 \times P \times N^{\text{Note2}}) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
NOTE 1: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length. NOTE 2: scaling factor $N=2$ when <i>highSpeedMeasFlagFR2-r17</i> is configured to set1 or scaling factor $N=6$ when <i>highSpeedMeasFlagFR2-r17</i> is configured to set2.		

Table 8.1.2.2-4: Evaluation period $T_{\text{Evaluate_out_SSB}}$ and $T_{\text{Evaluate_in_SSB}}$ for FR1(deactivated PSCell)

Configuration	$T_{\text{Evaluate_out_SSB}}$ (ms)	$T_{\text{Evaluate_in_SSB}}$ (ms)
no DRX	$\text{Ceil}(10 \times P) \times \text{measCyclePSCell}$	$\text{Ceil}(5 \times P) \times \text{measCyclePSCell}$
DRX cycle ≤ 320 ms	$\text{Ceil}(15 \times P) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePSCell})$	$\text{Ceil}(7.5 \times P) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePSCell})$
DRX cycle > 320 ms	$\text{Ceil}(10 \times P) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePSCell})$	$\text{Ceil}(5 \times P) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePSCell})$
NOTE: T_{DRX} is the DRX cycle length of SCG. measCyclePSCell is the measurement cycle length of the deactivated PSCell.		

Table 8.1.2.2-5: Evaluation period $T_{\text{Evaluate_out_SSB}}$ and $T_{\text{Evaluate_in_SSB}}$ for FR2(deactivated PSCell)

Configuration	$T_{\text{Evaluate_out_SSB}}$ (ms)	$T_{\text{Evaluate_in_SSB}}$ (ms)
no DRX	$\text{Ceil}(10 \times P \times N) \times \text{measCyclePSCell}$	$\text{Ceil}(5 \times P \times N) \times \text{measCyclePSCell}$
DRX cycle ≤ 320 ms	$\text{Ceil}(15 \times P \times N) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePSCell})$	$\text{Ceil}(7.5 \times P \times N) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePSCell})$
DRX cycle > 320 ms	$\text{Ceil}(10 \times P \times N) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePSCell})$	$\text{Ceil}(5 \times P \times N) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePSCell})$
NOTE: T_{DRX} is the DRX cycle length of SCG. measCyclePSCell is the measurement cycle length of the deactivated PSCell.		

8.1.2.3 Measurement restrictions for SSB based RLM

The UE is required to be capable of measuring SSB for RLM without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB OFDM symbols used for RLM fully or partially overlap with CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for RLM without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for RLM without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined

For FR2, when the SSB for RLM measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

For FR2, when the SSB for RLM measurement on one CC is in the same or adjacent OFDM symbol as SSB from cell with additional PCI for BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSBs. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

For FR2, there is no measurement restriction allowed when the network configures mixed numerology between SSB for RLM measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, provided that UE is capable of independent beam management on this FR2 band pair.

8.1.2.4 Minimum requirement of SSB based radio link monitoring for UE fulfilling relaxed measurement criteria

This clause contains minimum requirements for relaxed radio link monitoring based on SSB.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_out_SSB_Relax}}$ [ms] period becomes worse than the threshold $Q_{\text{out_SSB}}$ within $T_{\text{Evaluate_out_SSB_Relax}}$ [ms] evaluation period.

$T_{\text{Evaluate_out_SSB_Relax}}$ is defined in Table 8.1.2.4-1 for FR1.

$T_{\text{Evaluate_out_SSB_Relax}}$ is defined in Table 8.1.2.4-2 for FR2 with scaling factor $N=8$.

The value of P is defined in clause 8.1.2.2.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

Table 8.1.2.4-1: Evaluation period $T_{\text{Evaluate_out_SSB_Relax}}$ for FR1

Configuration	$T_{\text{Evaluate_out_SSB_Relax}}$ (ms)
---------------	---

$\text{Max}(T_{\text{DRX}}, T_{\text{SSB}}) \leq 80\text{ms}$	$\text{Max}(200 \times K3^{\text{NOTE3}}, \text{Ceil}(15 \times K1^{\text{NOTE2}} \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
$80\text{ms} < \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}) \leq 160\text{ms}$	$\text{Ceil}(15 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}})$
NOTE 1: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length and no longer than 80ms.	
NOTE 2: $K1 = 4$ for $\text{Max}(T_{\text{DRX}}, T_{\text{SSB}}) \leq 40\text{ms}$ and $K1 = 2$ for $40\text{ms} < \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}) \leq 80\text{ms}$.	
NOTE 3: $K3 = K1$, if $K1 \leq 2$; otherwise $K3 = 1$.	

Table 8.1.2.4-2: Evaluation period $T_{\text{Evaluate_out_SSB_Relax}}$ for FR2

Configuration	$T_{\text{Evaluate_out_SSB_Relax}}$ (ms)
$\text{Max}(T_{\text{DRX}}, T_{\text{SSB}}) \leq 80\text{ms}$	$\text{Max}(200 \times K4^{\text{NOTE3}}, \text{Ceil}(15 \times K2^{\text{NOTE2}} \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
$80\text{ms} < \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}) \leq 160\text{ms}$	$\text{Ceil}(15 \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}})$
NOTE 1: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length and no longer than 80ms.	
NOTE 2: $K2 = 2$.	
NOTE 3: $K4 = K2$, if $K2 \leq 2$; otherwise $K4 = 1$.	

8.1.3 Requirements for CSI-RS based radio link monitoring

8.1.3.1 Introduction

The requirements in this clause apply for each CSI-RS based RLM-RS resource configured for PCell, PSCell or deactivated PSCell, provided that the CSI-RS configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.1.3.2. UE is not expected to perform radio link monitoring measurements on the CSI-RS configured as RLM-RS if the CSI-RS is not in the active TCI state of any CORESET configured in the UE active BWP.

Table 8.1.3.1-1: PDCCH transmission parameters for out-of-sync evaluation

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	4dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

Table 8.1.3.1-2: PDCCH transmission parameters for in-sync evaluation

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	4

Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.1.3.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_out_CSI-RS}}$ ms period becomes worse than the threshold $Q_{\text{out_CSI-RS}}$ within $T_{\text{Evaluate_out_CSI-RS}}$ ms evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_in_CSI-RS}}$ ms period becomes better than the threshold $Q_{\text{in_CSI-RS}}$ within $T_{\text{Evaluate_in_CSI-RS}}$ ms evaluation period.

- $T_{\text{Evaluate_out_CSI-RS}}$ and $T_{\text{Evaluate_in_CSI-RS}}$ are defined in Table 8.1.3.2-1 for FR1.
- $T_{\text{Evaluate_out_CSI-RS}}$ and $T_{\text{Evaluate_in_CSI-RS}}$ are defined in Table 8.1.3.2-2 for FR2 with scaling factor $N=1$.
- $T_{\text{Evaluate_out_CSI-RS}}$ and $T_{\text{Evaluate_in_CSI-RS}}$ are defined in Table 8.1.3.2-3 for FR1 (deactivated PSCell).
- $T_{\text{Evaluate_out_CSI-RS}}$ and $T_{\text{Evaluate_in_CSI-RS}}$ are defined in Table 8.1.3.2-4 for FR2 (deactivated PSCell) with scaling factor $N=1$.

The requirements of $T_{\text{Evaluate_out_CSI-RS}}$ and $T_{\text{Evaluate_in_CSI-RS}}$ apply provided that the CSI-RS for RLM is not in a resource set configured with repetition ON. The requirements do not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for RLM and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

For a UE supporting *concurrentMeasGap-r17* and when concurrent measurement gaps are configured,

- P value for an RLM-RS resource to be measured is defined as
 - $N_{\text{total}} / N_{\text{outside_MG}}$ in FR1
 - $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ in FR2 with $N_{\text{available}} = 0$
 - $N_{\text{total}} / N_{\text{available}}$ in FR2 with $N_{\text{available}} > 0$
- For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any RLM-RS resource occasion:
 - N_{total} is the total number of RLM-RS resource occasions within the window W, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
 - $N_{\text{outside_MG}}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
 - $N_{\text{available}}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W
- T_{L1} is periodicity of the target RLM-RS.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent measurement gaps are not configured,

For FR1,

- $P = \frac{1}{1 - \frac{T_{CSI-RS}}{xRP}}$, when in the monitored cell there are GAPS configured for intra-frequency, inter-frequency or inter-RAT measurements, and these GAPS] are overlapping with some but not all occasions of the CSI-RS; and
- $P=1$ when in the monitored cell there are no GAPS overlapping with any occasion of the CSI-RS.

For FR2,

- $P=1$, when the RLM-RS resource is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P = \frac{1}{1 - \frac{T_{CSI-RS}}{xRP}}$, when the RLM-RS resource is partially overlapped with GAP and the RLM-RS resource is not overlapped with SMTC occasion ($T_{CSI-RS} < xRP$)
- $P = \frac{1}{1 - \frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the RLM-RS resource is not overlapped with GAP and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).
- $P = P_{\text{sharing factor}}$, when the RLM-RS resource is not overlapped with GAP and RLM-RS resource is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).
- $P = \frac{1}{1 - \frac{T_{CSI-RS}}{xRP} - \frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with GAP and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and
 - $T_{SMTCperiod} \neq xRP$ or
 - $T_{SMTCperiod} = xRP$ and $T_{CSI-RS} < 0.5 \times T_{SMTCperiod}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{CSI-RS}}{xRP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and $T_{SMTCperiod} = xRP$ and $T_{CSI-RS} = 0.5 \times T_{SMTCperiod}$
- $P = \frac{1}{1 - \frac{T_{CSI-RS}}{\min(xRP, T_{SMTCperiod})}}$, when the RLM-RS resource is partially overlapped with GAP and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with GAP
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{CSI-RS}}{xRP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < xRP$)

where,

- $P_{\text{sharing factor}} = 1$, if the RLM-RS resource outside gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
 - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{\text{sharing factor}} = 3$, otherwise.
- If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

- When a measurement gap is configured and the measurement gap is not NCSG,
 - an RLM-RS resource or an SMTC occasion is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and
 - $xRP = MGRP$
- Otherwise, when NCSG measurement gap is configured,
 - an RLM-RS resource or an SMTC occasion is considered to be overlapped with the GAP if
 - it overlaps the VIL1 or VIL2 of NCSG, or
 - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,
 - and
 - $xRP = VIRP$

If the UE is configured with Pre-MG, an RLM-RS resource or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.

When concurrent gaps are configured, an RLM-RS resource or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to clause 9.1.8.

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*.

Note: The overlap between CSI-RS for RLM and SMTC means that CSI-RS based RLM is within the SMTC window duration.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and GAP configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{identify_CGI,E-UTRAN}$ when the UE is requested to decode an LTE CGI.

The values of M_{out} and M_{in} used in Table 8.1.3.2-1, Table 8.1.3.2-2, Table 8.1.3.2-3 and Table 8.1.3.2-4 are defined as:

- $M_{out} = 20$ and $M_{in} = 10$, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* [6, clause 7.4.1] set to 3 and over the bandwidth ≥ 24 PRBs.

Table 8.1.3.2-1: Evaluation period $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ for FR1

Configuration	$T_{Evaluate_out_CSI-RS}$ (ms)	$T_{Evaluate_in_CSI-RS}$ (ms)
no DRX	$\text{Max}(200, \text{Ceil}(M_{out} \times P) \times T_{CSI-RS})$	$\text{Max}(100, \text{Ceil}(M_{in} \times P) \times T_{CSI-RS})$
$DRX \leq 320\text{ms}$	$\text{Max}(200, \text{Ceil}(1.5 \times M_{out} \times P) \times \text{Max}(T_{DRX}, T_{CSI-RS}))$	$\text{Max}(100, \text{Ceil}(1.5 \times M_{in} \times P) \times \text{Max}(T_{DRX}, T_{CSI-RS}))$
$DRX > 320\text{ms}$	$\text{Ceil}(M_{out} \times P) \times T_{DRX}$	$\text{Ceil}(M_{in} \times P) \times T_{DRX}$
NOTE: T_{CSI-RS} is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for T_{CSI-RS} equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.		

Table 8.1.3.2-2: Evaluation period $T_{Evaluate_out_CSI-RS}$ and $T_{Evaluate_in_CSI-RS}$ for FR2

Configuration	$T_{Evaluate_out_CSI-RS}$ (ms)	$T_{Evaluate_in_CSI-RS}$ (ms)
no DRX	$\text{Max}(200, \text{Ceil}(M_{out} \times P \times N) \times T_{CSI-RS})$	$\text{Max}(100, \text{Ceil}(M_{in} \times P \times N) \times T_{CSI-RS})$
$DRX \leq 320\text{ms}$	$\text{Max}(200, \text{Ceil}(1.5 \times M_{out} \times P \times N) \times \text{Max}(T_{DRX}, T_{CSI-RS}))$	$\text{Max}(100, \text{Ceil}(1.5 \times M_{in} \times P \times N) \times \text{Max}(T_{DRX}, T_{CSI-RS}))$
$DRX > 320\text{ms}$	$\text{Ceil}(M_{out} \times P \times N) \times T_{DRX}$	$\text{Ceil}(M_{in} \times P \times N) \times T_{DRX}$

NOTE: $T_{\text{CSI-RS}}$ is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for $T_{\text{CSI-RS}}$ equal to 5 ms, 10 ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.

Table 8.1.3.2-3: Evaluation period $T_{\text{Evaluate_out_CSI-RS}}$ and $T_{\text{Evaluate_in_CSI-RS}}$ for FR1 (deactivated PSCell)

Configuration	$T_{\text{Evaluate_out_CSI-RS}}$ (ms)	$T_{\text{Evaluate_in_CSI-RS}}$ (ms)
no DRX	$\text{Ceil}(M_{\text{out}} \times P) \times \text{measCyclePSCell}$	$\text{Ceil}(M_{\text{in}} \times P) \times \text{measCyclePSCell}$
$\text{DRX} \leq 320\text{ms}$	$\text{Ceil}(1.5 \times M_{\text{out}} \times P) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePSCell})$	$\text{Ceil}(1.5 \times M_{\text{in}} \times P) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePSCell})$
$\text{DRX} > 320\text{ms}$	$\text{Ceil}(M_{\text{out}} \times P) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePSCell})$	$\text{Ceil}(M_{\text{in}} \times P) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePSCell})$
NOTE: T_{DRX} is the DRX cycle length of SCG. measCyclePSCell is the measurement cycle length of the deactivated PSCell.		

Table 8.1.3.2-4: Evaluation period $T_{\text{Evaluate_out_CSI-RS}}$ and $T_{\text{Evaluate_in_CSI-RS}}$ for FR2 (deactivated PSCell)

Configuration	$T_{\text{Evaluate_out_CSI-RS}}$ (ms)	$T_{\text{Evaluate_in_CSI-RS}}$ (ms)
no DRX	$\text{Ceil}(M_{\text{out}} \times P \times N) \times \text{measCyclePSCell}$	$\text{Ceil}(M_{\text{in}} \times P \times N) \times \text{measCyclePSCell}$
$\text{DRX} \leq 320\text{ms}$	$\text{Ceil}(1.5 \times M_{\text{out}} \times P \times N) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePSCell})$	$\text{Ceil}(1.5 \times M_{\text{in}} \times P \times N) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePSCell})$
$\text{DRX} > 320\text{ms}$	$\text{Ceil}(M_{\text{out}} \times P \times N) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePSCell})$	$\text{Ceil}(M_{\text{in}} \times P \times N) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePSCell})$
NOTE: T_{DRX} is the DRX cycle length of SCG. measCyclePSCell is the measurement cycle length of the deactivated PSCell.		

8.1.3.3 Measurement restrictions for CSI-RS based RLM

The SSB mentioned in this clause can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

The UE is required to be capable of measuring CSI-RS for RLM without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following clauses.

For both FR1 and FR2, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for RLM in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD, or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS for RLM measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for RLM without any restriction.

For FR2, when the CSI-RS for RLM measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, or L1-RSRP measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR2, when the CSI-RS for RLM measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for RLM and the other CSI-RS. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.
 - The CSI-RS for RLM or the other CSI-RS in a resource set configured with repetition ON, or
 - The other CSI-RS is configured in q1 and beam failure is detected, or
 - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS for RLM without any restriction.

8.1.3.4 Minimum requirement of CSI-RS based radio link monitoring for UE fulfilling relaxed measurement criteria

This clause contains minimum requirements for relaxed radio link monitoring based on CSI-RS.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_out_CSI-RS_Relax}}$ [ms] period becomes worse than the threshold $Q_{\text{out_CSI-RS}}$ within $T_{\text{Evaluate_out_CSI-RS_Relax}}$ [ms] evaluation period.

$T_{\text{Evaluate_out_CSI-RS_Relax}}$ is defined in Table 8.1.3.4-1 for FR1.

$T_{\text{Evaluate_out_CSI-RS_Relax}}$ is defined in Table 8.1.3.4-2 for FR2 with scaling factor $N=1$.

The value of P is defined in clause 8.1.3.2.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

The values of M_{out} used in Table 8.1.3.4-1 and Table 8.1.3.4-2 are defined as:

- $M_{\text{out}} = 20$, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* [6, clause 7.4.1] set to 3 and over the bandwidth ≥ 24 PRBs.

Table 8.1.3.4-1: Evaluation period $T_{\text{Evaluate_out_CSI-RS_Relax}}$ for FR1

Configuration	$T_{\text{Evaluate_out_CSI-RS_Relax}}$ (ms)
$\text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}) \leq 80$ ms	$\text{Max}(200 \times K3^{\text{NOTE3}}, \text{Ceil}(1.5 \times M_{\text{out}} \times P \times K1^{\text{NOTE2}}) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}})^{\text{NOTE1}})$
NOTE1: $T_{\text{CSI-RS}}$ is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for $T_{\text{CSI-RS}}$ equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length and no longer than 80ms.	
NOTE2: $K1 = 2$ for $40 \text{ ms} < \text{MAX}(T_{\text{DRX}}, T_{\text{CSI-RS}}) \leq 80$ ms, $K1 = 4$ for $\text{MAX}(T_{\text{DRX}}, T_{\text{CSI-RS}}) \leq 40$ ms	
NOTE3: $K3 = K1$, if $K1 \leq 2$; $K3 = 1$ otherwise.	

Table 8.1.3.4-2: Evaluation period $T_{\text{Evaluate_out_CSI-RS_Relax}}$ for FR2

Configuration	$T_{\text{Evaluate_out_CSI-RS_Relax}}$ (ms)
$\text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}) \leq 80$ ms	$\text{Max}(200 \times K4^{\text{NOTE3}}, \text{Ceil}(1.5 \times M_{\text{out}} \times P \times N \times K2^{\text{NOTE2}}) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}})^{\text{NOTE1}})$
NOTE1: $T_{\text{CSI-RS}}$ is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for $T_{\text{CSI-RS}}$ equal to 5 ms, 10 ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length and no longer than 80ms.	
NOTE2: $K2 = 2$.	
NOTE3: $K4 = K2$, if $K2 \leq 2$; $K4 = 1$ otherwise.	

8.1.4 Minimum requirement at transitions

When the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each RLM-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode for each RLM-RS resource. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of RLM resources to a second configuration of RLM resources that is different from the first configuration, for each RLM resource present in the second configuration, for a duration of time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration and the second configuration. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second configuration for each RLM resource present in the second configuration. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of active TCI state of the CORESET to a second configuration of active TCI state of the CORESET, for each CSI-RS for RLM present in the second configuration, the UE shall use an evaluation period corresponding to the second configuration from the time of transition. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

8.1.5 Minimum requirement for UE turning off the transmitter

The transmitter power of the UE in the monitored cell shall be turned off within 40ms after expiry of T310 timer as specified in TS 38.331 [2].

8.1.6 Minimum requirement for L1 indication

When the downlink radio link quality on all the configured RLM-RS resources is worse than Q_{out} , layer 1 of the UE shall send an out-of-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the out-of-sync indications as specified in TS 38.331 [2].

When the downlink radio link quality on at least one of the configured RLM-RS resources is better than Q_{in} , layer 1 of the UE shall send an in-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the in-sync indications as specified in TS 38.331 [2].

The out-of-sync and in-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval}$.

When DRX is not used $T_{Indication_interval}$ is $\max(10\text{ms}, T_{RLM-RS,M})$, where $T_{RLM-RS,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 8.1.2 if the RLM-RS resource is SSB, or T_{CSI-RS} specified in clause 8.1.3 if the RLM-RS resource is CSI-RS.

In case DRX is used, $T_{Indication_interval}$ is $\text{Max}(10\text{ms}, 1.5 \times \text{DRX_cycle_length}, 1.5 \times T_{RLM-RS,M})$ if DRX_cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX_cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

For deactivated PSCell, when DRX is not used $T_{Indication_interval}$ is $\text{Max}(10\text{ms}, \text{measCyclePSCell})$. In case DRX is used, $T_{Indication_interval}$ is $\text{Max}(10\text{ms}, 1.5 \times \text{DRX_cycle_length}, 1.5 \times \text{measCyclePSCell})$ if DRX_cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is $\text{Max}(\text{DRX_cycle_length}, \text{measCyclePSCell})$ if DRX_cycle_length is greater than 320ms.

8.1.7 Scheduling availability of UE during radio link monitoring

When the reference signal to be measured for RLM has different subcarrier spacing than PDSCH/PDCCH or is on frequency range 2, there are restrictions on the scheduling availability as described in the following clauses.

8.1.7.1 Scheduling availability of UE performing radio link monitoring with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to radio link monitoring performed with a same subcarrier spacing as PDSCH/PDCCH on FR1.

8.1.7.2 Scheduling availability of UE performing radio link monitoring with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to radio link monitoring based on SSB as RLM-RS. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to radio link monitoring based on SSB as RLM-RS.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for radio link monitoring.

When intra-band carrier aggregation in FR1 is performed, the scheduling restrictions on FR1 serving PCell or PSCell applies to all serving cells in the same band on the symbols that fully or partially overlap with the restricted symbols. When inter-band carrier aggregation within FR1 is performed, there are no scheduling restrictions on FR1 serving cell(s) in the bands due to radio link monitoring performed on FR1 serving PCell or PSCell in different bands.

8.1.7.3 Scheduling availability of UE performing radio link monitoring on FR2

The following scheduling restriction applies due to radio link monitoring on an FR2 serving PCell and/or PSCell.

- If the RLM-RS is CSI-RS which is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON,
 - There are no scheduling restrictions due to radio link monitoring based on the CSI-RS.
- Otherwise
 - For FR2-1 or the RLM-RS is not using 480 kHz SCS or 960 kHz SCS on FR2-2, the UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on RLM-RS symbols to be measured for radio link monitoring.
 - For FR2-2 and the RLM-RS is using 480 kHz SCS or 960 kHz SCS, the UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on RLM-RS symbols to be measured for radio link monitoring, and on one data symbol before each RLM-RS symbol to be measured and one data symbol after each RLM-RS symbol to be measured.

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions on FR2 serving PCell or PSCell applies to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cell(s) in the bands for the following cases, provided that UE is capable of independent beam management on this FR2 band pair:

- when performing radio link monitoring performed on FR2 serving PCell or PSCell in different bands,
- the UE is configured with same or different numerology between SSB on one FR2 band and data on the other FR2 band.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 3, UE shall receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for RLM; and

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 2, UE shall receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for RLM.

8.1.7.4 Scheduling availability of UE performing radio link monitoring on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR-DC

There are no scheduling restrictions on FR1 serving cell(s) due to radio link monitoring performed on FR2 serving PCell and/or PSCell.

There are no scheduling restrictions on FR2 serving cell(s) due to radio link monitoring performed on FR1 serving PCell and/or PSCell.

8.1A Radio Link Monitoring with CCA on Target Frequency

8.1A.1 Introduction

The requirements in clause 8.1A apply for radio link monitoring on a carrier frequency with CCA for cells:

- PCell in SA NR operation mode,
- PSCell in EN-DC operation mode.
- PSCell in NR-DC operation mode.

The UE shall monitor the downlink radio link quality based on the reference signal configured as RLM-RS resource(s) in order to detect the downlink radio link quality of the PCell and PSCell as specified in TS 38.213 [3]. The configured RLM-RS resources can be all SSBs, or all CSI-RSs, or a mix of SSBs and CSI-RSs. UE is not required to perform RLM outside the active DL BWP.

On each RLM-RS resource, the UE shall estimate the downlink radio link quality and compare it to the thresholds $Q_{out,CCA}$ and $Q_{in,CCA}$ for the purpose of monitoring downlink radio link quality of the cell.

The threshold $Q_{out,CCA}$ is defined as the level at which the downlink radio link cannot be reliably received and shall correspond to the out-of-sync block error rate ($BLER_{out,CCA}$) as defined in Table 8.1A.1-1. For SSB based radio link monitoring, $Q_{out,SSB,CCA}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1A.2.1-1.

The threshold $Q_{in,CCA}$ is defined as the level at which the downlink radio link quality can be received with significantly higher reliability than at $Q_{out,CCA}$ and shall correspond to the in-sync block error rate ($BLER_{in}$) as defined in Table 8.1A.1-1. For SSB based radio link monitoring, $Q_{in,SSB,CCA}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1A.2.1-2.

The out-of-sync block error rate ($BLER_{out,CCA}$) and in-sync block error rate ($BLER_{in,CCA}$) are determined from the network configuration via parameter *rlmInSyncOutOfSyncThreshold* signalled by higher layers. When UE is not configured with *rlmInSyncOutOfSyncThreshold* from the network, UE determines out-of-sync and in-sync block error rates from Configuration #0 in Table 8.1A.1-1 as default. All requirements in clause 8.1A are applicable for BLER Configuration #0 in Table 8.1A.1-1.

Table 8.1A.1-1: Out-of-sync and in-sync block error rates

Configuration	$BLER_{out,CCA}$	$BLER_{in,CCA}$
0	10%	2%

UE shall be able to monitor up to N_{RLM} RLM-RS resources of the same or different types in each corresponding carrier frequency range, depending on a maximum number L_{max} of SSBs per half frame according to TS 38.213 [3], where N_{RLM} is specified in Table 8.1A.1-2, and meet the requirements as specified in clause 8.1A. UE is not required to meet the requirements in clause 8.1A if RLM-RS is not configured and no TCI state for PDCCH is activated.

Table 8.1A.1-2: Maximum number of RLM-RS resources N_{RLM}

Carrier frequency range of PCell/PSCell	L_{max}	Maximum number of RLM-RS resources, N_{RLM}
FR1	8	4
FR2-2	64	8

In the requirements of clause 8.1A, the term RLM-RS SSB occasion not available at the UE refers to when the RLM-RS SSB is configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the set of configured RLM-RS resources are not available at the UE due to DL CCA failures at gNB during the corresponding evaluation period; otherwise the RLM-RS SSB is considered as available at the UE.

The requirements in clause 8.1A apply for any *channelAccessMode* configuration [TS 38.331, 2].

8.1A.2 Requirements for SSB Based Radio Link Monitoring

8.1A.2.1 Introduction

The requirements in this clause apply for each SSB based RLM-RS resource configured for PCell or PSCell, provided that the SSB configured for RLM are actually configured to be transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.1A.2.2 but occasionally may not be transmitted due to CCA operation.

Table 8.1A.2.1-1: PDCCH transmission parameters for out-of-sync evaluation

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	4 dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	4 dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

Table 8.1A.2.1-2: PDCCH transmission parameters for in-sync evaluation

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	4
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.1A.2.2 Minimum Requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_out_SSB,CCA}}$ [ms] period becomes worse than the threshold $Q_{\text{out_SSB,CCA}}$ within $T_{\text{Evaluate_out_SSB,CCA}}$ [ms] evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_in_SSB,CCA}}$ [ms] period becomes better than the threshold $Q_{\text{in_SSB,CCA}}$ within $T_{\text{Evaluate_in_SSB,CCA}}$ [ms] evaluation period. During the in-sync evaluation procedure, layer 1 of the UE shall not send any in-sync indication for the cell to the higher layers when L_{in} exceeds $L_{\text{in,max}}$, where L_{in} and $L_{\text{in,max}}$ are defined in Table 8.1A.2.2-1.

$T_{\text{Evaluate_out_SSB,CCA}}$ and $T_{\text{Evaluate_in_SSB,CCA}}$ are defined in Table 8.1A.2.2-1 for FR1.

$T_{\text{Evaluate_out_SSB,CCA}}$ and $T_{\text{Evaluate_in_SSB,CCA}}$ are defined in Table 8.1A.2.2-2 for FR2-2 with scaling factor $N = 12$.

For a UE supporting *concurrentMeasGap-r17* and when concurrent gaps are configured,

- P value for an RLM-RS resource to be measured is defined as $N_{\text{total}} / N_{\text{outside_MG}}$
- For a window W of duration $\max(T_{\text{L1}}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gap and per-FR measurement gap within the same FR as serving cell, and starting at the beginning of any RLM-RS resource occasion:
 - N_{total} is the total number of RLM-RS resource occasions within the window W, including those overlapped with measurement gap occasions within the window W, and
 - $N_{\text{outside_MG}}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{xRP}}$, when in the monitored cell there are GAPS configured for intra-frequency, inter-frequency or inter-RAT measurements, and these GAPS are overlapping with some but not all occasions of the SSB RLM-RS resources; and
- $P=1$ when in the monitored cell there are no GAPS overlapping with any occasion of the SSB RLM-RS resources.

When a measurement gap is configured and the measurement gap is not NCSG,

- an RLM-RS resource is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and
- $xRP = \text{MGRP}$

Otherwise, when NCSG measurement gap is configured,

- an RLM-RS resource is considered to be overlapped with the GAP if it overlaps the VIL1 or VIL2 of NCSG, and
- $xRP = \text{VIRP}$

If the UE is configured with Pre-MG, an RLM-RS resource is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.

When concurrent gaps are configured, an RLM-RS resource is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to clause 9.1.8.

For FR2-2,

- $P = \frac{1}{1 - \frac{T_{SSB}}{T_{SMTCperiod}}}$, when RLM-RS resource is not overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).
- P is $P_{sharing}$ factor, when the RLM-RS resource is not overlapped with measurement gap and RLM-RS resource is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$).
- $P = \frac{1}{1 - \frac{T_{SSB}}{MGRP} - \frac{T_{SSB}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{SMTCperiod} \neq MGRP$ or
 - $T_{SMTCperiod} = MGRP$ and $T_{SSB} < 0.5 * T_{SMTCperiod}$
- $P = \frac{P_{sharing factor}}{1 - \frac{T_{SSB}}{MGRP}}$, when the RLM-RS is partially overlapped with measurement gap and the RLM-RS is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod} = MGRP$ and $T_{SSB} = 0.5 \times T_{SMTCperiod}$
- $P = \frac{1}{1 - \frac{T_{SSB}}{T_{SMTCperiod}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap
- $P = \frac{P_{sharing factor}}{1 - \frac{T_{SSB}}{MGRP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < MGRP$)
- $P_{sharing factor} = 1$, if the RLM-RS resource outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and K data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and K data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and K is defined in clause 9.2.5.3.3, and,
 - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and K data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and K data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured, and K is defined in clause 9.2.5.3.3.
- $P_{sharing factor} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{SMTCperiod}$ follows *smtc2*; Otherwise $T_{SMTCperiod}$ follows *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2-2 band, provided the SMTC offset of all CCs in FR2-2 have the same offset.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and GAP configurations does not meet previous conditions.

Table 8.1A.2.2-1: Evaluation period $T_{Evaluate_out_SSB,CCA}$ and $T_{Evaluate_in_SSB,CCA}$ for FR1

Configuration	$T_{Evaluate_out_SSB,CCA}$ (ms)		$T_{Evaluate_in_SSB,CCA}$ (ms)
	RLM-RS SSB Es/Iot ^{Note4} ≥ -7 dB	RLM-RS SSB Es/Iot ^{Note4} < -7 dB	
no DRX	$\text{Max}(200, \text{Ceil}(17 * P) * T_{SSB})$	$\text{Max}(200, \text{Ceil}(24 * P) * T_{SSB})$	$\text{Max}(100, \text{Ceil}((5 + L_{in}) * P) * T_{SSB})$
DRX cycle ≤ 320	$\text{Max}(200, \text{Ceil}(1.5 * 15 * P) * \text{Max}(T_{DRX}, T_{SSB}))$	$\text{Max}(200, \text{Ceil}(1.5 * 20 * P) * \text{Max}(T_{DRX}, T_{SSB}))$	$\text{Max}(100, \text{Ceil}(1.5 * (5 + L_{in}) * P) * \text{Max}(T_{DRX}, T_{SSB}))$

DRX cycle>320	$\text{Ceil}(13 \cdot P) \cdot T_{\text{DRX}}$	$\text{Ceil}(16 \cdot P) \cdot T_{\text{DRX}}$	$\text{Ceil}((5 + L_{\text{in}}) \cdot P) \cdot T_{\text{DRX}}$
NOTE 1: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length. NOTE 2: When DRX is not configured, L_{in} is the number of RLM-RS SSB occasions which are not available at the UE during $T_{\text{Evaluate_in_SSB,CCA}}$, where $L_{\text{in}} \leq L_{\text{in,max}}$. When DRX is configured, L_{in} is the number of DRX cycles in which at least one RLM-RS SSB occasion is not available at the UE during $T_{\text{Evaluate_in_SSB,CCA}}$, where $L_{\text{in}} \leq L_{\text{in,max}}$. The UE is not required to determine the availability of SSB occasions more frequent than Once per $\text{Max}(10\text{ms}, P \cdot T_{\text{SSB}})$ if no DRX is used, Once per $\text{Max}(10\text{ms}, \text{Ceil}(1.5 \cdot P) \cdot \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$ if DRX cycle $\leq 320\text{ms}$, Once per $P \cdot T_{\text{DRX}}$ if DRX cycle $> 320\text{ms}$. NOTE 3: $L_{\text{in,max}}=7$ for $\text{Max}(T_{\text{DRX}}, T_{\text{SSB}}) \leq 40$ assuming $T_{\text{DRX}}=0$ for non-DRX case, $L_{\text{in,max}}=5$ for $40 < \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}) \leq 320$, $L_{\text{in,max}}=3$ for $T_{\text{DRX}} > 320$. NOTE 4: RLM-RS SSB Es/lot is the averaged Es/lot over the most recent previous out-of-sync evaluation period.			

Table 8.1A.2.2-2: Evaluation period $T_{\text{Evaluate_out_SSB,CCA}}$ and $T_{\text{Evaluate_in_SSB,CCA}}$ for FR2-2

Configuration	$T_{\text{Evaluate_out_SSB,CCA}}$ (ms)	$T_{\text{Evaluate_in_SSB,CCA}}$ (ms)
no DRX	$\text{Max}(200, \text{Ceil}(12 \cdot P \cdot N) \cdot T_{\text{SSB}})$	$\text{Max}(100, \text{Ceil}((5 + L_{\text{in}}) \cdot P \cdot N) \cdot T_{\text{SSB}})$
DRX cycle ≤ 320	$\text{Max}(200, \text{Ceil}(1.5 \cdot 10 \cdot P \cdot N) \cdot \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$	$\text{Max}(100, \text{Ceil}(1.5 \cdot (5 + L_{\text{in}}) \cdot P \cdot N) \cdot \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle > 320	$\text{Ceil}(10 \cdot P \cdot N) \cdot T_{\text{DRX}}$	$\text{Ceil}((5 + L_{\text{in}}) \cdot P \cdot N) \cdot T_{\text{DRX}}$
NOTE 1: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length. NOTE 2: When DRX is not configured, L_{in} is the number of RLM-RS SSB occasions groups which are not available at the UE during $T_{\text{Evaluate_in_SSB,CCA}}$, where $L_{\text{in}} \leq L_{\text{in,max}}$. A RLM-RS SSB occasions group consists of N consecutive RLM-RS SSB occasions, and the RLM-RS SSB occasions group is not available at the UE when at least one RLM-RS SSB occasion in the group is not transmitted by the gNB. When DRX is configured, L_{in} is the number of DRX cycles groups which are not available at the UE during $T_{\text{Evaluate_in_SSB,CCA}}$, where $L_{\text{in}} \leq L_{\text{in,max}}$. A DRX group consists of N DRX cycles, and the DRX group is not available when there is at least one DRX in which at least one RLM-RS SSB occasion is not available. The UE is not required to determine the availability of SSB occasions more frequent than once per DRX cycle length, when configured with DRX. NOTE 3: $L_{\text{in,max}}=7$ for $\text{Max}(T_{\text{DRX}}, T_{\text{SSB}}) \leq 40$ assuming $T_{\text{DRX}}=0$ for non-DRX case, $L_{\text{in,max}}=5$ for $40 < \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}) \leq 320$, $L_{\text{in,max}}=3$ for $T_{\text{DRX}} > 320$.		

8.1A.2.3 Measurement Restrictions for SSB based RLM

The UE is required to be capable of measuring SSB for RLM without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following clauses.

For FR1, when the SSB for RLM is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for RLM without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for RLM without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure SSB for RLM.

For FR2-2, when the SSB for RLM measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

8.1A.3 Minimum requirement at transitions

When the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each RLM-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode for each RLM-RS resource. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of RLM resources to a second configuration of RLM resources that is different from the first configuration, for each RLM resource present in the second configuration, for a duration of time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration and the second configuration. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second configuration for each RLM resource present in the second configuration. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

8.1A.4 Minimum requirement for UE turning off the transmitter

The transmitter power of the UE in the monitored cell shall be turned off within 40ms after expiry of T310 timer as specified in TS 38.331 [2]. The UE shall not perform CCA procedure on any of the serving carrier frequencies with CCA after the expiry of T310.

8.1A.5 Minimum requirement for L1 indication

When the downlink radio link quality on all the configured RLM-RS resources is worse than $Q_{out,CCA}$, layer 1 of the UE shall send an out-of-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the out-of-sync indications as specified in TS 38.331 [2].

When the downlink radio link quality on at least one of the configured RLM-RS resources is better than $Q_{in,CCA}$, layer 1 of the UE shall send an in-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the in-sync indications as specified in TS 38.331 [2].

The out-of-sync and in-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval,CCA}$.

When DRX is not used $T_{Indication_interval,CCA}$ is $\max(10\text{ms}, T_{RLM-RS,M})$, where $T_{RLM,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 8.1A.2 if the RLM-RS resource is SSB.

In case DRX is used, $T_{Indication_interval,CCA}$ is $\text{Max}(10\text{ms}, 1.5 \times \text{DRX_cycle_length}, 1.5 \times T_{RLM-RS,M})$ if DRX_cycle_length is less than or equal to 320ms, and $T_{Indication_interval,CCA}$ is DRX_cycle_length if DRX_cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

8.1A.6 Scheduling availability of UE during radio link monitoring

When the reference signal to be measured for RLM on a carrier frequency with CCA has different subcarrier spacing than PDSCH/PDCCH, there are restrictions on the scheduling availability as described in the following clauses.

8.1A.6.1 Scheduling availability of UE performing radio link monitoring with the same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to radio link monitoring performed with a same subcarrier spacing as PDSCH/PDCCH on FR1.

8.1A.6.2 Scheduling availability of UE performing radio link monitoring with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to radio link monitoring based on SSB as RLM-RS. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to radio link monitoring based on SSB as RLM-RS.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for radio link monitoring.

When intra-band carrier aggregation is performed, the scheduling restrictions on PCell or PSCell applies to all serving cells in the same band on the symbols that fully or partially overlap with the restricted symbols.

8.1A.6.3 Scheduling availability of UE performing radio link monitoring on FR2-2

The following scheduling restriction applies due to radio link monitoring on an FR2-2 serving PCell and/or PSCell.

- If the RLM-RS is CSI-RS which is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON,
 - There are no scheduling restrictions due to radio link monitoring based on the CSI-RS.
- Otherwise
 - When the RLM-RS is using 120 KHz SCS, the UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on RLM-RS symbols to be measured for radio link monitoring.
 - When the RLM-RS is using 480 kHz SCS or 960 kHz SCS, the UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on RLM-RS resource symbols to be measured for radio link monitoring, and on one data symbol before each RLM-RS symbol to be measured and one data symbol after each RLM-RS symbol to be measured.

When intra-band carrier aggregation in FR2-2 is performed, the scheduling restrictions on FR2-2 serving PCell or PSCell applies to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

For FR2-2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 3, UE shall receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for RLM; and

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 2, UE shall receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for RLM.

8.1A.6.4 Scheduling availability of UE performing radio link monitoring on FR1 or FR2-2 in case of FR1-FR2-2 inter-band CA and NR-DC

There are no scheduling restrictions on FR1 serving cell(s) due to radio link monitoring performed on FR2-2 serving PCell and/or PSCell.

There are no scheduling restrictions on FR2-2 serving cell(s) due to radio link monitoring performed on FR1 serving PCell and/or PSCell.

8.1B Radio Link Monitoring for RedCap

8.1B.1 Introduction

The requirements in clause 8.1B apply for radio link monitoring on UE with reduced capabilities:

- PCell in SA NR operation mode,

The UE shall monitor the downlink radio link quality based on the reference signal configured as RLM-RS resource(s) in order to detect the downlink radio link quality of the PCell as specified in TS 38.213 [3]. The configured RLM-RS resources can be all SSBs, or all CSI-RSs, or a mix of SSBs and CSI-RSs. UE is not required to perform RLM outside the active DL BWP. The SSB and SMTC in this section applies for both CD-SSB and NCD-SSB if it is not additional specified.

On each RLM-RS resource, the UE shall estimate the downlink radio link quality and compare it to the thresholds $Q_{out,RedCap}$ and $Q_{in,RedCap}$ for the purpose of monitoring downlink radio link quality of the cell.

The threshold $Q_{out,RedCap}$ is defined as the level at which the downlink radio link cannot be reliably received and shall correspond to the out-of-sync block error rate ($BLER_{out}$) as defined in Table 8.1B.1-1. For SSB based radio link monitoring, $Q_{out_SSB,RedCap}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1B.2.1-1. For CSI-RS based radio link monitoring, $Q_{out_CSI-RS,RedCap}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1B.3.1-1.

The threshold $Q_{in,RedCap}$ is defined as the level at which the downlink radio link quality can be received with significantly higher reliability than at $Q_{out,RedCap}$ and shall correspond to the in-sync block error rate ($BLER_{in,RedCap}$) as defined in Table 8.1B.1-1. For SSB based radio link monitoring, $Q_{in_SSB,RedCap}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1B.2.1-2. For CSI-RS based radio link monitoring, $Q_{in_CSI-RS,RedCap}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1B.3.1-2.

The out-of-sync block error rate ($BLER_{out,RedCap}$) and in-sync block error rate ($BLER_{in,RedCap}$) are determined from the network configuration via parameter *rlmInSyncOutOfSyncThreshold* signalled by higher layers. When UE is not configured with *rlmInSyncOutOfSyncThreshold* from the network, UE determines out-of-sync and in-sync block error rates from Configuration #0 in Table 8.1B.1-1 by default. All requirements in clause 8.1B are applicable for BLER Configuration #0 in Table 8.1B.1-1.

Table 8.1B.1-1: Out-of-sync and in-sync block error rates for RedCap UE

Configuration	$BLER_{out,RedCap}$	$BLER_{in,RedCap}$
0	10%	2%

UE shall be able to monitor up to N_{RLM} RLM-RS resources of the same or different types in each corresponding carrier frequency range, depending on a maximum number L_{max} of SSBs per half frame according to TS 38.213 [3], where N_{RLM} is specified in Table 8.1B.1-2 according TS 38.213 [3], and meet the requirements as specified in clause 8.1B. UE is not required to meet the requirements in clause 8.1B if RLM-RS is not configured and no TCI state for PDCCH is activated.

Table 8.1B.1-2: Maximum number of RLM-RS resources N_{RLM} for RedCap UE

Carrier frequency range of PCell	L_{max}	Maximum number of RLM-RS resources, N_{RLM}
FR1, ≤ 3 GHz ^{Note}	4	2
FR1, > 3 GHz ^{Note}	8	4
FR2	64	8
NOTE: For unpaired spectrum operation with Case C - 30 kHz SCS, 3GHz is replaced by 1.88GHz, as specified in clause 4.1 in TS 38.213 [3].		

8.1B.2 Requirements for SSB based radio link monitoring

8.1B.2.1 Introduction

The requirements in this clause apply for each SSB based RLM-RS resource configured for PCell, provided that the SSB configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.1B.2.2.

Table 8.1B.2.1-1: PDCCH transmission parameters for out-of-sync evaluation for RedCap UE

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	16; for RedCap UE with 1Rx branch. 8; for RedCap UE with 2Rx branches.
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	4dB
Bandwidth (PRBs)	48; for RedCap UE with 1Rx branch. 24; for RedCap UE with 2Rx branches.
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note: SCS = 60KHz is not applicable for FR1.	

Table 8.1B.2.1-2: PDCCH transmission parameters for in-sync evaluation for RedCap UE

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8; for RedCap UE with 1Rx branch. 4; for RedCap UE with 2Rx branches.
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	48; for RedCap UE with 1Rx branch. 24; for RedCap UE with 2Rx branches.
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note: SCS = 60KHz is not applicable for FR1.	

8.1B.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_out_SSB,RedCap}}$ [ms] period becomes worse than the threshold $Q_{\text{out_SSB,RedCap}}$ within $T_{\text{Evaluate_out_SSB,RedCap}}$ [ms] evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_in_SSB,RedCap}}$ [ms] period becomes better than the threshold $Q_{\text{in_SSB,RedCap}}$ within $T_{\text{Evaluate_in_SSB,RedCap}}$ [ms] evaluation period.

$T_{\text{Evaluate_out_SSB,RedCap}}$ and $T_{\text{Evaluate_in_SSB,RedCap}}$ are defined in Table 8.1B.2.2-1 and Table 8.1B.2.2-3 for FR1 for UE with 2Rx RedCap and 1Rx RedCap, respectively.

$T_{\text{Evaluate_out_SSB,RedCap}}$ and $T_{\text{Evaluate_in_SSB,RedCap}}$ are defined in Table 8.1B.2.2-2 and for FR2 with scaling factor $N=8$ for 2Rx RedCap.

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, and these measurement gaps are overlapping with some but not all occasions of the SSB; and
- $P = 1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when RLM-RS resource is not overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$).
- P is $P_{\text{sharing factor}}$, when the RLM-RS resource is not overlapped with measurement gap and RLM-RS resource is fully overlapped with SMTC period ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}} - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{\text{SMTCperiod}} \neq \text{MGRP}$ or
 - $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{SSB}} < 0.5 * T_{\text{SMTCperiod}}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when the RLM-RS is partially overlapped with measurement gap and the RLM-RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{SSB}} = 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < \text{MGRP}$)
- $P_{\text{sharing factor}} = 1$, if the RLM-RS resource outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
 - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{\text{sharing factor}} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{\text{SMTcperiod}}$ follows *smtc2*; Otherwise $T_{\text{SMTcperiod}}$ follows *smtc1*.

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{\text{SMTcperiod}}$ follows *smtc2*; Otherwise $T_{\text{SMTcperiod}}$ follows *smtc1*.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTc occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

Table 8.1B.2.2-1: Evaluation period $T_{\text{Evaluate_out_SSB,RedCap}}$ and $T_{\text{Evaluate_in_SSB,RedCap}}$ for FR1 for 2Rx RedCap UE

Configuration	$T_{\text{Evaluate_out_SSB,RedCap}}$ (ms)	$T_{\text{Evaluate_in_SSB,RedCap}}$ (ms)
no DRX	$\text{Max}(200, \text{Ceil}(10 \times P) \times T_{\text{SSB}})$	$\text{Max}(100, \text{Ceil}(5 \times P) \times T_{\text{SSB}})$
DRX cycle ≤ 320 ms	$\text{Max}(200, \text{Ceil}(15 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$	$\text{Max}(100, \text{Ceil}(7.5 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle > 320 ms	$\text{Ceil}(10 \times P) \times T_{\text{DRX}}$	$\text{Ceil}(5 \times P) \times T_{\text{DRX}}$
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

Table 8.1B.2.2-2: Evaluation period $T_{\text{Evaluate_out_SSB,RedCap}}$ and $T_{\text{Evaluate_in_SSB,RedCap}}$ for FR2 for 2Rx RedCap UE

Configuration	$T_{\text{Evaluate_out_SSB,RedCap}}$ (ms)	$T_{\text{Evaluate_in_SSB,RedCap}}$ (ms)
no DRX	$\text{Max}(200, \text{Ceil}(10 \times P \times N) \times T_{\text{SSB}})$	$\text{Max}(100, \text{Ceil}(5 \times P \times N) \times T_{\text{SSB}})$
DRX cycle ≤ 320 ms	$\text{Max}(200, \text{Ceil}(15 \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$	$\text{Max}(100, \text{Ceil}(7.5 \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle > 320 ms	$\text{Ceil}(10 \times P \times N) \times T_{\text{DRX}}$	$\text{Ceil}(5 \times P \times N) \times T_{\text{DRX}}$
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

Table 8.1B.2.2-3: Evaluation period $T_{\text{Evaluate_out_SSB,RedCap}}$ and $T_{\text{Evaluate_in_SSB,RedCap}}$ for FR1 for 1Rx RedCap UE

Configuration	$T_{\text{Evaluate_out_SSB,RedCap}}$ (ms)	$T_{\text{Evaluate_in_SSB,RedCap}}$ (ms)
no DRX	$\text{Max}(400, \text{Ceil}(20 \times P) \times T_{\text{SSB}})$	$\text{Max}(100, \text{Ceil}(5 \times P) \times T_{\text{SSB}})$
DRX cycle ≤ 320 ms	$\text{Max}(400, \text{Ceil}(30 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$	$\text{Max}(100, \text{Ceil}(7.5 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle > 320 ms	$\text{Ceil}(20 \times P) \times T_{\text{DRX}}$	$\text{Ceil}(5 \times P) \times T_{\text{DRX}}$
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

8.1B.2.3 Measurement restrictions for SSB based RLM

The UE is required to be capable of measuring SSB for RLM without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB for RLM is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for RLM without any restriction;
- If SSB and CSI-RS have different SCS,

- If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for RLM without any restriction;
- If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

For FR2, when the SSB for RLM measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

8.1B.3 Requirements for CSI-RS based radio link monitoring

8.1B.3.1 Introduction

The requirements in this clause apply for each CSI-RS based RLM-RS resource configured for PCell, provided that the CSI-RS configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.1B.3.2. UE is not expected to perform radio link monitoring measurements on the CSI-RS configured as RLM-RS if the CSI-RS is not in the active TCI state of any CORESET configured in the UE active BWP.

Table 8.1B.3.1-1: PDCCH transmission parameters for out-of-sync evaluation for RedCap UE

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	16; for RedCap UE with 1Rx branch. 8; for RedCap UE with 2Rx branches.
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	4dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note: SCS = 60KHz is not applicable for FR1.	

Table 8.1B.3.1-2: PDCCH transmission parameters for in-sync evaluation for RedCap UE

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8; for RedCap UE with 1Rx branch. 4; for RedCap UE with 2Rx branches.
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal

Mapping from REG to CCE	Distributed
Note: SCS = 60KHz is not applicable for FR1.	

8.1B.3.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_out_CSI-RS,RedCap}}$ ms period becomes worse than the threshold $Q_{\text{out_CSI-RS,RedCap}}$ within $T_{\text{Evaluate_out_CSI-RS,RedCap}}$ ms evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_in_CSI-RS,RedCap}}$ ms period becomes better than the threshold $Q_{\text{in_CSI-RS,RedCap}}$ within $T_{\text{Evaluate_in_CSI-RS,RedCap}}$ ms evaluation period.

- $T_{\text{Evaluate_out_CSI-RS,RedCap}}$ and $T_{\text{Evaluate_in_CSI-RS,RedCap}}$ are defined in Table 8.1B.3.2-1 and Table 8.1B.3.2-3 for FR1 for RedCap 2Rx RedCap and 1Rx RedCap, respectively.
- $T_{\text{Evaluate_out_CSI-RS,RedCap}}$ and $T_{\text{Evaluate_in_CSI-RS,RedCap}}$ are defined in Table 8.1B.3.2-2 for FR2 with scaling factor $N=1$ for 2 Rx RedCap.

The requirements of $T_{\text{Evaluate_out_CSI-RS,RedCap}}$ and $T_{\text{Evaluate_in_CSI-RS,RedCap}}$ apply provided that the CSI-RS for RLM is not in a resource set configured with repetition ON. The requirements do not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for RLM and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, and these measurement gaps are overlapping with some but not all occasions of the CSI-RS; and
- $P=1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR2,

- $P=1$, when the RLM-RS resource is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is not overlapped with SMTC occasion ($T_{\text{CSI-RS}} < MGRP$)
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when the RLM-RS resource is not overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$).
- $P = P_{\text{sharing factor}}$, when the RLM-RS resource is not overlapped with measurement gap and RLM-RS resource is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP} - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{\text{SMTCperiod}} \neq MGRP$ or
 - $T_{\text{SMTCperiod}} = MGRP$ and $T_{\text{CSI-RS}} < 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = MGRP$ and $T_{\text{CSI-RS}} = 0.5 \times T_{\text{SMTCperiod}}$

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when the RLM-RS resource is partially overlapped with measurement gap and the RLM-RS resource is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < MGRP$)
- $P_{\text{sharing factor}} = 1$, if the RLM-RS resource outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
 - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{\text{sharing factor}} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{\text{SMTCperiod}}$ follows *smtc2*; Otherwise $T_{\text{SMTCperiod}}$ follows *smtc1*.

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{\text{SMTCperiod}}$ follows *smtc2*; Otherwise $T_{\text{SMTCperiod}}$ follows *smtc1*.

Note: The overlap between CSI-RS for RLM and SMTC means that CSI-RS based RLM is within the SMTC window duration.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

The values of $M_{\text{out,RedCap}}$ and $M_{\text{in,RedCap}}$ used in Table 8.1B.3.2-1 and Table 8.1B.3.2-2 for UE with 2Rx are defined as:

- $M_{\text{out,RedCap}} = 20$ and $M_{\text{in,RedCap}} = 10$, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* [6, clause 7.4.1] set to 3 and over the bandwidth ≥ 24 PRBs.

The values of $M_{\text{out,RedCap}}$ and $M_{\text{in,RedCap}}$ used in Table 8.1B.3.2-3 for RedCap UE with 1Rx are defined as:

- $M_{\text{out,RedCap}} = 40$ and $M_{\text{in,RedCap}} = 10$, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* [6, clause 7.4.1] set to 3 and over the bandwidth ≥ 24 PRBs.

Table 8.1B.3.2-1: Evaluation period $T_{\text{Evaluate_out_CSI-RS,RedCap}}$ and $T_{\text{Evaluate_in_CSI-RS,RedCap}}$ for FR1 for 2Rx RedCap UE

Configuration	$T_{\text{Evaluate_out_CSI-RS,RedCap}}$ (ms)	$T_{\text{Evaluate_in_CSI-RS,RedCap}}$ (ms)
no DRX	$\text{Max}(200, \text{Ceil}(M_{\text{out,RedCap}} \times P) \times T_{\text{CSI-RS}})$	$\text{Max}(100, \text{Ceil}(M_{\text{in,RedCap}} \times P) \times T_{\text{CSI-RS}})$
$\text{DRX} \leq 320\text{ms}$	$\text{Max}(200, \text{Ceil}(1.5 \times M_{\text{out,RedCap}} \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$	$\text{Max}(100, \text{Ceil}(1.5 \times M_{\text{in,RedCap}} \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
$\text{DRX} > 320\text{ms}$	$\text{Ceil}(M_{\text{out,RedCap}} \times P) \times T_{\text{DRX}}$	$\text{Ceil}(M_{\text{in,RedCap}} \times P) \times T_{\text{DRX}}$
NOTE: $T_{\text{CSI-RS}}$ is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for $T_{\text{CSI-RS}}$ equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.		

Table 8.1B.3.2-2: Evaluation period $T_{\text{Evaluate_out_CSI-RS,RedCap}}$ and $T_{\text{Evaluate_in_CSI-RS,RedCap}}$ for FR2 for 2Rx RedCap UE

Configuration	$T_{\text{Evaluate_out_CSI-RS,RedCap}}$ (ms)	$T_{\text{Evaluate_in_CSI-RS,RedCap}}$ (ms)
no DRX	$\text{Max}(200, \text{Ceil}(M_{\text{out,RedCap}} \times P \times N) \times T_{\text{CSI-RS}})$	$\text{Max}(100, \text{Ceil}(M_{\text{in,RedCap}} \times P \times N) \times T_{\text{CSI-RS}})$
$\text{DRX} \leq 320\text{ms}$	$\text{Max}(200, \text{Ceil}(1.5 \times M_{\text{out,RedCap}} \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$	$\text{Max}(100, \text{Ceil}(1.5 \times M_{\text{in,RedCap}} \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
$\text{DRX} > 320\text{ms}$	$\text{Ceil}(M_{\text{out,RedCap}} \times P \times N) \times T_{\text{DRX}}$	$\text{Ceil}(M_{\text{in,RedCap}} \times P \times N) \times T_{\text{DRX}}$
NOTE: $T_{\text{CSI-RS}}$ is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for $T_{\text{CSI-RS}}$ equal to 5 ms, 10 ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.		

Table 8.1B.3.2-3: Evaluation period $T_{\text{Evaluate_out_CSI-RS,RedCap}}$ and $T_{\text{Evaluate_in_CSI-RS,RedCap}}$ for FR1 for 1Rx RedCap UE

Configuration	$T_{\text{Evaluate_out_CSI-RS,RedCap}}$ (ms)	$T_{\text{Evaluate_in_CSI-RS,RedCap}}$ (ms)
no DRX	$\text{Max}(400, \text{Ceil}(M_{\text{out,RedCap}} \times P) \times T_{\text{CSI-RS}})$	$\text{Max}(100, \text{Ceil}(M_{\text{in,RedCap}} \times P) \times T_{\text{CSI-RS}})$
$\text{DRX} \leq 320\text{ms}$	$\text{Max}(400, \text{Ceil}(1.5 \times M_{\text{out,RedCap}} \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$	$\text{Max}(100, \text{Ceil}(1.5 \times M_{\text{in,RedCap}} \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
$\text{DRX} > 320\text{ms}$	$\text{Ceil}(M_{\text{out,RedCap}} \times P) \times T_{\text{DRX}}$	$\text{Ceil}(M_{\text{in,RedCap}} \times P) \times T_{\text{DRX}}$
NOTE: $T_{\text{CSI-RS}}$ is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for $T_{\text{CSI-RS}}$ equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.		

8.1B.3.3 Measurement restrictions for CSI-RS based RLM

The UE is required to be capable of measuring CSI-RS for RLM without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following clauses.

For both FR1 and FR2, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for RLM in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD, or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS for RLM measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for RLM without any restriction.

For FR2, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM, BFD, or L1-RSRP measurement, or in the same symbol as SSB for CBD when beam failure is detected, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR2, when the CSI-RS for RLM measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- In the following cases, UE is required to measure one of but not both CSI-RS for RLM and the other CSI-RS. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.
 - The CSI-RS for RLM or the other CSI-RS in a resource set configured with repetition ON, or
 - The other CSI-RS is configured in q1 and beam failure is detected, or

- The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS for RLM without any restriction.

8.1B.4 Minimum requirement at transitions

When the UE transitions between RLM CD-SSB resource and RLM NCD-SSB resource due to BWP switching during one evaluation period, the UE shall use an evaluation period that is the maximum of the evaluation periods corresponding to the first SSB type and the second SSB type after the BWP switching. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second SSB type for each RLM-RS resource.

The requirements in clause 8.1.4 shall also apply except the scenarios described above.

8.1B.5 Minimum requirement for UE turning off the transmitter

The requirements in clause 8.1.5 shall apply.

8.1B.6 Minimum requirement for L1 indication

When the downlink radio link quality on all the configured RLM-RS resources is worse than $Q_{out,RedCap}$, layer 1 of the UE shall send an out-of-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the out-of-sync indications as specified in TS 38.331 [2].

When the downlink radio link quality on at least one of the configured RLM-RS resources is better than $Q_{in,RedCap}$, layer 1 of the UE shall send an in-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the in-sync indications as specified in TS 38.331 [2].

The out-of-sync and in-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval,RedCap}$.

When DRX is not used for RedCap UEs, $T_{Indication_interval,RedCap}$ is $\max(10\text{ms}, T_{RLM-RS,M})$, where $T_{RLM-RS,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 8.1B.2 if the RLM-RS resource is SSB, or T_{CSI-RS} specified in clause 8.1B.3 if the RLM-RS resource is CSI-RS.

In case DRX is used for RedCap UEs, $T_{Indication_interval,RedCap}$ is $\text{Max}(10\text{ms}, 1.5 \times \text{DRX_cycle_length}, 1.5 \times T_{RLM-RS,M})$ if DRX_cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX_cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

When DRX is not used for HD-FDD RedCap UEs, $T_{Indication_interval,RedCap}$ is $\max(10\text{ms}, T_{RLM-RS,M})$, where $T_{RLM-RS,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 8.1B.2 if the RLM-RS resource is SSB, or T_{CSI-RS} specified in clause 8.1B.3 if the RLM-RS resource is CSI-RS, under the following condition

- For each RLM-RS configuration, at least one RLM-RS sample must fall with DL occasion within an indication period.

In case DRX is used for HD-FDD RedCap UEs, $T_{Indication_interval,RedCap}$ is $\text{Max}(10\text{ms}, 1.5 \times \text{DRX_cycle_length}, 1.5 \times T_{RLM-RS,M})$ if DRX_cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX_cycle_length is greater than 320ms, under the following condition

- For each RLM-RS configuration, at least one RLM-RS sample must fall with DL occasion within an indication period.

8.1B.7 Scheduling availability of UE during radio link monitoring

The requirements in clause 8.1.7 shall apply.

8.1B.7.1 Scheduling availability of UE performing radio link monitoring with a same subcarrier spacing as PDSCH/PDCCH on FR1

The requirements in clause 8.1.7.1 shall apply.

8.1B.7.2 Scheduling availability of UE performing radio link monitoring with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to radio link monitoring based on SSB as RLM-RS. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to radio link monitoring based on SSB as RLM-RS.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for radio link monitoring.

8.1B.7.3 Scheduling availability of UE performing radio link monitoring on FR2

The following scheduling restriction applies due to radio link monitoring on an FR2 serving PCell.

- If the RLM-RS is CSI-RS which is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON,
 - There are no scheduling restrictions due to radio link monitoring based on the CSI-RS.
- Otherwise
 - The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on RLM-RS symbols to be measured for radio link monitoring.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 3, UE shall receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for RLM; and

For the SSB for RLM and CORESET for RMSI scheduling multiplexing patterns 2, UE shall receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for RLM.

8.1C Radio Link Monitoring for Satellite Access

8.1C.1 Introduction

The requirements in clause 8.1C apply for radio link monitoring on PCell and the UE is configured with only PCell, which is served by satellite access node (SAN). The UE shall monitor the downlink radio link quality based on the reference signal configured as RLM-RS resource(s) in order to detect the downlink radio link quality of the PCell as specified in TS 38.213 [3]. The configured RLM-RS resources can be all SSBs, or all CSI-RSs, or a mix of SSBs and CSI-RSs. UE is not required to perform RLM outside the active DL BWP.

On each RLM-RS resource, the UE shall estimate the downlink radio link quality and compare it to the thresholds Q_{out} and Q_{in} for the purpose of monitoring downlink radio link quality of the cell.

The threshold Q_{out} is defined as the level at which the downlink radio link cannot be reliably received and shall correspond to the out-of-sync block error rate ($BLER_{out}$) as defined in Table 8.1C.1-1. For SSB based radio link

monitoring, Q_{out_SSB} is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1C.2.1-1. For CSI-RS based radio link monitoring, Q_{out_CSI-RS} is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1C.3.1-1.

The threshold Q_{in} is defined as the level at which the downlink radio link quality can be received with significantly higher reliability than at Q_{out} and shall correspond to the in-sync block error rate ($BLER_{in}$) as defined in Table 8.1C.1-1. For SSB based radio link monitoring, Q_{in_SSB} is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1C.2.1-2. For CSI-RS based radio link monitoring, Q_{in_CSI-RS} is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.1C.3.1-2.

The out-of-sync block error rate ($BLER_{out}$) and in-sync block error rate ($BLER_{in}$) are determined from the network configuration via parameter *rlmInSyncOutOfSyncThreshold* signalled by higher layers. When UE is not configured with *rlmInSyncOutOfSyncThreshold* from the network, UE determines out-of-sync and in-sync block error rates from Configuration #0 in Table 8.1C.1-1 by default. All requirements in clause 8.1C are applicable for BLER Configuration #0 in Table 8.1C.1-1.

Table 8.1C.1-1: Out-of-sync and in-sync block error rates

Configuration	$BLER_{out}$	$BLER_{in}$
0	10%	2%

UE shall be able to monitor up to N_{RLM} RLM-RS resources of the same or different types in each corresponding carrier frequency range, depending on a maximum number L_{max} of SSBs per half frame according to TS 38.213 [3], where N_{RLM} is specified in Table 8.1C.1-2 according TS 38.213 [3], and meet the requirements as specified in clause 8.1C. UE is not required to meet the requirements in clause 8.1C if RLM-RS is not configured and no TCI state for PDCCH is activated.

Table 8.1C.1-2: Maximum number of RLM-RS resources N_{RLM}

Carrier frequency range of PCell	L_{max}	Maximum number of RLM-RS resources, N_{RLM}
FR1, ≤ 3 GHz ^{Note}	4	2
FR1, > 3 GHz ^{Note}	8	4
NOTE: For unpaired spectrum operation with Case C - 30 kHz SCS, 3GHz is replaced by 1.88GHz, as specified in clause 4.1 in TS 38.213 [3].		

8.1C.2 Requirements for SSB based radio link monitoring

8.1C.2.1 Introduction

The requirements in this clause apply for each SSB based RLM-RS resource configured for PCell, provided that the SSB configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.1C.2.2.

Table 8.1C.2.1-1: PDCCH transmission parameters for out-of-sync evaluation

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	4dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size

REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

Table 8.1C.2.1-2: PDCCH transmission parameters for in-sync evaluation

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	4
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.1C.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_out_SSB}}$ [ms] period becomes worse than the threshold $Q_{\text{out_SSB}}$ within $T_{\text{Evaluate_out_SSB}}$ [ms] evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_in_SSB}}$ [ms] period becomes better than the threshold $Q_{\text{in_SSB}}$ within $T_{\text{Evaluate_in_SSB}}$ [ms] evaluation period.

$T_{\text{Evaluate_out_SSB}}$ and $T_{\text{Evaluate_in_SSB}}$ are defined in Table 8.1C.2.2-1 for FR1.

P value for an RLM-RS resource to be measured is defined as

- $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ with $N_{\text{available}} = 0$
- $N_{\text{total}} / N_{\text{available}}$ with $N_{\text{available}} > 0$

For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
- $N_{\text{outside_MG}}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{\text{available}}$ is
 - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
 - same as $N_{\text{outside_MG}}$, otherwise
- T_{L1} is periodicity of the target RLM-RS
- $P_{\text{sharing factor}} = 3$.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

Table 8.1C.2.2-1: Evaluation period $T_{\text{Evaluate_out_SSB}}$ and $T_{\text{Evaluate_in_SSB}}$ for FR1

Configuration	$T_{\text{Evaluate_out_SSB}}$ (ms)	$T_{\text{Evaluate_in_SSB}}$ (ms)
no DRX	$\text{Max}(200, \text{Ceil}(10 \times P) \times T_{\text{SSB}})$	$\text{Max}(100, \text{Ceil}(5 \times P) \times T_{\text{SSB}})$
DRX cycle ≤ 320 ms	$\text{Max}(200, \text{Ceil}(15 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$	$\text{Max}(100, \text{Ceil}(7.5 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle > 320 ms	$\text{Ceil}(10 \times P) \times T_{\text{DRX}}$	$\text{Ceil}(5 \times P) \times T_{\text{DRX}}$
NOTE: T_{SSB} is the periodicity of the SSB configured for RLM. T_{DRX} is the DRX cycle length.		

8.1C.2.3 Measurement restrictions for SSB based RLM

The UE is required to be capable of measuring SSB for RLM without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB for RLM is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for RLM without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for RLM without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for RLM and CSI-RS. Longer measurement period for SSB based RLM is expected, and no requirements are defined.

8.1C.3 Requirements for CSI-RS based radio link monitoring

8.1C.3.1 Introduction

The requirements in this clause apply for each CSI-RS based RLM-RS resource configured for PCell, provided that the CSI-RS configured for RLM is actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.1C.3.2. UE is not expected to perform radio link monitoring measurements on the CSI-RS configured as RLM-RS if the CSI-RS is not in the active TCI state of any CORESET configured in the UE active BWP.

Table 8.1C.3.1-1: PDCCH transmission parameters for out-of-sync evaluation

Attribute	Value for BLER Configuration #0
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	4dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	4dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6

CP length	Normal
Mapping from REG to CCE	Distributed

Table 8.1C.3.1-2: PDCCH transmission parameters for in-sync evaluation

Attribute	Value for BLER Configuration #0
DCI payload size	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	4
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.1C.3.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_out_CSI-RS}}$ ms period becomes worse than the threshold $Q_{\text{out_CSI-RS}}$ within $T_{\text{Evaluate_out_CSI-RS}}$ ms evaluation period.

UE shall be able to evaluate whether the downlink radio link quality on the configured RLM-RS resource estimated over the last $T_{\text{Evaluate_in_CSI-RS}}$ ms period becomes better than the threshold $Q_{\text{in_CSI-RS}}$ within $T_{\text{Evaluate_in_CSI-RS}}$ ms evaluation period.

- $T_{\text{Evaluate_out_CSI-RS}}$ and $T_{\text{Evaluate_in_CSI-RS}}$ are defined in Table 8.1C.3.2-1 for FR1.

The requirements of $T_{\text{Evaluate_out_CSI-RS}}$ and $T_{\text{Evaluate_in_CSI-RS}}$ apply provided that the CSI-RS for RLM is not in a resource set configured with repetition ON. The requirements do not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for RLM and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

P value for an RLM-RS resource to be measured is defined as

- $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ with $N_{\text{available}} = 0$
- $N_{\text{total}} / N_{\text{available}}$ with $N_{\text{available}} > 0$

For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
- $N_{\text{outside_MG}}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{\text{available}}$ is
 - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
 - same as $N_{\text{outside_MG}}$, otherwise

- T_{L1} is periodicity of the target RLM-RS
- $P_{\text{sharing factor}} = 3$.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

The values of M_{out} and M_{in} used in Table 8.1C.3.2-1 are defined as:

- $M_{\text{out}} = 20$ and $M_{\text{in}} = 10$, if the CSI-RS resource configured for RLM is transmitted with higher layer CSI-RS parameter *density* [6, clause 7.4.1] set to 3 and over the bandwidth ≥ 24 PRBs.

Table 8.1C.3.2-1: Evaluation period $T_{\text{Evaluate_out_CSI-RS}}$ and $T_{\text{Evaluate_in_CSI-RS}}$ for FR1

Configuration	$T_{\text{Evaluate_out_CSI-RS}}$ (ms)	$T_{\text{Evaluate_in_CSI-RS}}$ (ms)
no DRX	$\text{Max}(200, \text{Ceil}(M_{\text{out}} \times P) \times T_{\text{CSI-RS}})$	$\text{Max}(100, \text{Ceil}(M_{\text{in}} \times P) \times T_{\text{CSI-RS}})$
$\text{DRX} \leq 320\text{ms}$	$\text{Max}(200, \text{Ceil}(1.5 \times M_{\text{out}} \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$	$\text{Max}(100, \text{Ceil}(1.5 \times M_{\text{in}} \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
$\text{DRX} > 320\text{ms}$	$\text{Ceil}(M_{\text{out}} \times P) \times T_{\text{DRX}}$	$\text{Ceil}(M_{\text{in}} \times P) \times T_{\text{DRX}}$
NOTE: $T_{\text{CSI-RS}}$ is the periodicity of the CSI-RS resource configured for RLM. The requirements in this table apply for $T_{\text{CSI-RS}}$ equal to 5 ms, 10ms, 20 ms or 40 ms. T_{DRX} is the DRX cycle length.		

8.1C.3.3 Measurement restrictions for CSI-RS based RLM

The UE is required to be capable of measuring CSI-RS for RLM without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following clauses.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for RLM in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD, or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for RLM, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS for RLM measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for RLM and SSB. Longer measurement period for CSI-RS based RLM is expected, and no requirements are defined.

For FR1, when the CSI-RS for RLM is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for RLM without any restriction.

8.1C.4 Minimum requirement at transitions

When the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each RLM-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode for each RLM-RS resource. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of RLM resources to a second configuration of RLM resources that is different from the first configuration, for each RLM resource present in the second configuration, for a duration of time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration

and the second configuration. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second configuration for each RLM resource present in the second configuration. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

When the UE transitions from a first configuration of active TCI state of the CORESET to a second configuration of active TCI state of the CORESET, for each CSI-RS for RLM present in the second configuration, the UE shall use an evaluation period corresponding to the second configuration from the time of transition. This requirement shall be applied to both out-of-sync evaluation and in-sync evaluation of the monitored cell.

8.1C.5 Minimum requirement for UE turning off the transmitter

The transmitter power of the UE in the monitored cell shall be turned off within 40ms after expiry of T310 timer as specified in TS 38.331 [2].

8.1C.6 Minimum requirement for L1 indication

When the downlink radio link quality on all the configured RLM-RS resources is worse than Q_{out} , layer 1 of the UE shall send an out-of-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the out-of-sync indications as specified in TS 38.331 [2].

When the downlink radio link quality on at least one of the configured RLM-RS resources is better than Q_{in} , layer 1 of the UE shall send an in-sync indication for the cell to the higher layers. A layer 3 filter shall be applied to the in-sync indications as specified in TS 38.331 [2].

The out-of-sync and in-sync evaluations for the configured RLM-RS resources shall be performed as specified in clause 5 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval}$.

When DRX is not used $T_{Indication_interval}$ is $\max(10\text{ms}, T_{RLM-RS,M})$, where $T_{RLM-RS,M}$ is the shortest periodicity of all configured RLM-RS resources for the monitored cell, which corresponds to T_{SSB} specified in clause 8.1C.2 if the RLM-RS resource is SSB, or T_{CSI-RS} specified in clause 8.1C.3 if the RLM-RS resource is CSI-RS.

In case DRX is used, $T_{Indication_interval}$ is $\text{Max}(10\text{ms}, 1.5 \times \text{DRX_cycle_length}, 1.5 \times T_{RLM-RS,M})$ if DRX cycle_length is less than or equal to 320ms, and $T_{Indication_interval}$ is DRX_cycle_length if DRX cycle_length is greater than 320ms. Upon start of T310 timer as specified in TS 38.331 [2], the UE shall monitor the configured RLM-RS resources for recovery using the evaluation period and layer 1 indication interval corresponding to the no DRX mode until the expiry or stop of T310 timer.

8.1C.7 Scheduling availability of UE during radio link monitoring

When the reference signal to be measured for RLM has different subcarrier spacing than PDSCH/PDCCH, there are restrictions on the scheduling availability as described in the following clauses.

8.1C.7.1 Scheduling availability of UE performing radio link monitoring with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to radio link monitoring performed with a same subcarrier spacing as PDSCH/PDCCH on FR1.

8.1C.7.2 Scheduling availability of UE performing radio link monitoring with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to radio link monitoring based on SSB as RLM-RS. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to radio link monitoring based on SSB as RLM-RS.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for radio link monitoring.

8.2 Interruption

8.2.1 EN-DC Interruption

8.2.1.1 Introduction

This clause contains the requirements related to the interruptions on PSCell, and SCell, when

- E-UTRA PCell transitions between active and non-active during DRX, or
- E-UTRA PCell transitions from non-DRX to DRX, or
- E-UTRA SCell in MCG or SCell in SCG is added or released, or
- E-UTRA SCell in MCG or SCell(s) in SCG is activated or deactivated, or
- measurements on SCC with deactivated SCell in either E-UTRA MCG or NR SCG, or
- a supplementary UL carrier or an UL carrier is configured or de-configured, or
- UL/DL active BWP is switched on PSCell or SCell in SCG, or
- E-UTRA SCell in MCG or SCell(s) in SCG is directly activated and hibernated, or
- E-UTRA SCell in MCG is hibernated, or
- Multiple SCells in SCG are activated or deactivated, or
- SCell dormancy switches, or
- CQI/RRM measurement happens during SCell dormancy, or
- UE-specific CBW is changed on PSCell or SCell in SCG, or
- CGI reading of an NR neighbour cell with autonomous gaps, or
- CGI reading of an E-UTRA neighbour cell with autonomous gaps.
- NR SRS carrier based switching, or
- E-UTRA SRS carrier based switching, or
- NR SRS antenna port switching, or
- UE dynamic Tx switches between two uplink carriers, or
- SCell in SCG is activated based on aperiodic CSI-RS.

The requirements shall apply for E-UTRA-NR DC with an E-UTRA PCell.

This clause contains interruptions where victim cell is PSCell or SCell belonging to SCG. Requirements for interruptions requirements when the victim cell is E-UTRA PCell or E-UTRA SCell belonging to MCG are specified in TS 36.133 [15].

For a UE which does not support per-FR measurement gaps, interruptions to the PSCell or activated SCG SCells may be caused by EUTRA PCell, EUTRA SCells or SCells on any frequency range. For UE which support per-FR gaps, interruptions to the PSCell or activated SCG SCells may be caused by EUTRA PCell, EUTRA SCells or SCells on the same frequency range as the victim cell.

8.2.1.2 Requirements

8.2.1.2.1 Interruptions at transitions between active and non-active during DRX

Interruption on PSCell and the activated SCell if configured due to E-UTRA PCell transitions between active and non-active during DRX when PSCell or SCell is in non-DRX are allowed with up to 1% probability of missed ACK/NACK when the configured E-UTRA PCell DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured E-UTRA PCell DRX cycle is 640 ms or longer. Each interruption shall not exceed X slot as defined in table 8.2.1.2.1-1.

Table 8.2.1.2.1-1: Interruption length X at transition between active and non-active during DRX

μ	NR Slot length (ms)	Interruption length X (slots)	
		Sync	Async
0	1	1	2
1	0.5	1	2
2	0.25	3	
3	0.125	5	

When both E-UTRA PCell and PSCell are in DRX, no interruption is allowed.

8.2.1.2.2 Interruptions at transitions from non-DRX to DRX

Interruption on PSCell and the activated SCell if configured due to E-UTRA PCell transitions from non-DRX to DRX when PSCell or SCell is in non-DRX shall not exceed X slot as defined in table 8.2.1.2.1-1.

When PSCell and the activated SCell are in DRX, no interruption due to E-UTRA PCell transitions from non-DRX to DRX is allowed.

8.2.1.2.3 Interruptions at SCell addition/release

The requirements in this clause shall apply for the UE configured with PSCell.

When one E-UTRA SCell in MCG is added or released:

- the UE is allowed an interruption on any active serving cell in SCG:
 - of up to X1 slot, if the active serving cell is not in the same band as any of the E-UTRA SCells being added or released, or
 - of up to X1 slot, if the active serving cell is in the band overlapping or partially overlapping with the E-UTRA SCell being added or released and UE indicates it is capable of *interBandMRDC-WithOverlapDL-Bands-r16* on this band pair, or
 - of up to $\max\{Y1 \text{ slot} + T_{\text{SMTC_duration}}, 5\text{ms}\}$, if the active serving cells are in the same band or in the band overlapping or partially overlapping with the E-UTRA SCells being added or released, and UE does not indicate it is capable of *interBandMRDC-WithOverlapDL-Bands-r16* on this band pair, provided the cell specific reference signals from the active serving cells and the E-UTRA SCells being added or released are available in the same slot, where $T_{\text{SMTC_duration}}$ is the longest SMTC duration among all above active serving cells in SCG;

Where X1 and Y1 are specified in Table 8.2.1.2.3-1.

When one SCell in SCG is added or released:

- the UE is allowed an interruption on any active serving cell in SCG:
 - of up to X1 slot, if the active serving cell and the SCell being added or released are in a FR1 band pair or in a FR1+FR2 band pair.
 - of up to X1 slot, if the active serving cell and the SCell being added or released are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair

or

- of up to $Y1 \text{ slot} + T_{\text{SMTC_duration}}$ if the active serving cells are in the same band as any of the SCells being added or released, provided the cell specific reference signals from the active serving cells and the SCells being added or released are available in the same slot, where, $T_{\text{SMTC_duration}}$ is
 - the longest SMTC duration among all above active serving cells in SCG and the SCell being added when one SCell is added. If SSB configuration (*absoluteFrequencySSB*) but no SMTC configuration is provided for the SCell being added, the SSB transmission periodicity is assumed to be 5ms and $T_{\text{SMTC_duration}}$ for the SCell being added is $x \text{ ms}$, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being added. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being added, $T_{\text{SMTC_duration}}$ for the SCell being added is 0 ms;
 - the longest SMTC duration among all above active serving cells in SCG when one SCell is released.

Where X1 and Y1 are specified in Table 8.2.1.2.3-2.

Table 8.2.1.2.3-1: Interruption length X1 and Y1 at E-UTRA SCell addition/Release

μ	NR Slot length (ms)	Interruption length X1 (slots)		Interruption length Y1 (slots)	
		Sync	Async	Sync	Async
0	1	1	2	1	2
1	0.5	2	3	2	3
2	0.25	5		4	5
3	0.125	9		N/A	- N/A

Table 8.2.1.2.3-2: Interruption length X1 and Y1 at SCell addition/Release

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)		Interruption length Y1 (slots)
0	1	1		1
1	0.5	2		2
2	0.25	Both aggressor cell and victim cell are on FR2	4	4
		Either aggressor cell or victim cell is on FR1	5	
3	0.125	Aggressor cell is on FR2	8	8
		Aggressor cell is on FR1	9	

8.2.1.2.4 Interruptions at SCell activation/deactivation

The requirements in this clause shall apply for the UE configured with PSCell and one SCell.

When one E-UTRA SCell in MCG is activated from deactivated or dormant state, or deactivated from activated or dormant state:

- the UE is allowed an interruption on any active serving cell in SCG:
 - of up to X2 slot, if the active serving cell is not in the same band as any of the E-UTRA SCells being activated or deactivated, or
 - of up to X2 slot, if the active serving cell is in the band overlapping or partially overlapping with the E-UTRA SCell being activated or deactivated and UE indicates it is capable of *interBandMRDC-WithOverlapDL-Bands-r16* on this band pair, or
 - of up to $\max\{Y2 \text{ slot} + T_{\text{SMTC_duration}}, 5\text{ms}\}$, if the active serving cells are in the same band or in the band overlapping or partially overlapping with the E-UTRA SCells being activated or deactivated, and UE does not indicate it is capable of *interBandMRDC-WithOverlapDL-Bands-r16* on this band pair, provided the cell

specific reference signals from the active serving cells and the E-UTRA SCells being activated or deactivated are available in the same slot, where $T_{\text{SMTC_duration}}$ is the longest SMTC duration among all above active serving cells in SCG.

Where X2 and Y2 are specified in Table 8.2.1.2.4-1.

When one SCell in SCG is activated or deactivated:

- an interruption on any active serving cell in SCG:
 - of up to X2 slot, if the active serving cell and the SCell being activated or deactivated are in a FR1 band pair or in a FR1+FR2 band pair.
 - of up to X2 slot, if the active serving cells and the SCells being activated or deactivated are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair.

or

- of up to Y2 slot + $T_{\text{SMTC_duration}}$ if the active serving cells are in the same band as any of the SCells being activated or deactivated, provided the cell specific reference signals from the active serving cells and the SCells being activated or deactivated are available in the same slot, where, $T_{\text{SMTC_duration}}$ is
 - the longest SMTC duration among all above active serving cells in SCG and the SCell being activated when one SCell is activated. If SSB configuration (*absoluteFrequencySSB*) but no SMTC configuration is provided for the SCell being activated, the SSB transmission periodicity is assumed to be 5ms and $T_{\text{SMTC_duration}}$ for the SCell being activated is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being activated. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being activated, $T_{\text{SMTC_duration}}$ for the SCell being activated is 0ms;
 - the longest SMTC duration among all above active serving cells in SCG when one SCell is deactivated.

Where X2 and Y2 are specified in Table 8.2.1.2.4-2.

Table 8.2.1.2.4-1: Interruption length X2 and Y2 at E-UTRA SCell activation/deactivation

μ	NR Slot length (ms)	Interruption length X2 (slots)		Interruption length Y2 (slots)	
		Sync	Async	Sync	Async
0	1	1	2	1	2
1	0.5	1	2	1	2
2	0.25	3		2	3
3	0.125	5		N/A	N/A

Table 8.2.1.2.4-2: Interruption length X2 and Y2 at SCell activation/deactivation

μ	NR Slot length (ms) of victim cell	Interruption length X2 (slots)		Interruption length Y2 (slots)
0	1	1		1
1	0.5	1		1
2	0.25	Both aggressor cell and victim cell are on FR2	2	2
		Either aggressor cell or victim cell is on FR1	3	
3	0.125	Aggressor cell is on FR2	4	4
		Aggressor cell is on FR1	5	

8.2.1.2.5 Interruptions during measurements on SCC

8.2.1.2.5.1 Interruptions during measurements on deactivated NR SCC

Interruption on PSCell and other activated NR SCell(s) during measurement on the deactivated NR SCC shall meet requirements in clause 8.2.2.2.3, where the term PCell in clause 8.2.2.2.3 shall be deemed to be replaced with PSCell.

8.2.1.2.5.2 Interruptions during measurements on deactivated E-UTRAN SCC

When one E-UTRA SCell in MCG is deactivated, the UE is allowed due to measurements on the E-UTRA SCC with the deactivated E-UTRA SCell:

- an interruption on PSCell or any activated SCell with up to 0.5% probability of missed ACK/NACK when any of the configured *measCycleSCell* [15] for the deactivated E-UTRA SCells is 640 ms or longer.
- an interruption on PSCell or any activated SCell with up to 0.5% probability of missed ACK/NACK regardless of the configured *measCycleSCell* [15] for the deactivated E-UTRA SCells if indicated by the network using IE *allowInterruptions* [15].

Each interruption shall not exceed

- X3 slot, if the PSCell or activated SCell is not in the same band as the E-UTRA deactivated SCC being measured, or
- X3 slot, if the PSCell or activated SCell is in the band overlapping or partially overlapping with the E-UTRA deactivated SCC being measured, and UE indicates it is capable of *interBandMRDC-WithOverlapDL-Bands-r16* on this band pair, or
- Y3 slot + SMTC duration, if the PSCell or activated SCell is in the same band or in the band overlapping or partially overlapping with the E-UTRA deactivated SCC being measured, and UE does not indicate it is capable of *interBandMRDC-WithOverlapDL-Bands-r16* on this band pair, provided the cell specific reference signals from the PSCell or activated SCell and the E-UTRA deactivated SCC being measured are available in the same slot.

Table 8.2.1.2.5.2-1: Interruption length X3 and Y3 at measurements on deactivated E-UTRA SCC

μ	NR Slot length (ms)	Interruption length X3 (slots)		Interruption length Y3 (slots)	
		Sync	Async	Sync	Async
0	1	1	2	1	2
1	0.5	1	2	1	2
2	0.25	3		2	3
3	0.125	5		N/A	N/A

8.2.1.2.5.3 Interruptions during CQI measurements on dormant E-UTRAN SCell

When one E-UTRA SCell in MCG is dormant, the UE is allowed due to CQI measurements on the dormant E-UTRA SCell:

- an interruption on PSCell or any activated SCell with up to 0.5% probability of missed ACK/NACK.

Each interruption shall not exceed

- X3 slot, if the PSCell or activated SCell is not in the same band as the E-UTRA dormant SCell being measured, or
- X3 slot, if the PSCell or activated SCell is in the band overlapping or partially overlapping with the E-UTRA dormant SCC being measured, and UE indicates it is capable of *interBandMRDC-WithOverlapDL-Bands-r16* on this band pair, or
- Y3 slot + SMTC duration, if the PSCell or activated SCell is in the same band or in the band overlapping or partially overlapping with the E-UTRA dormant SCell being measured, and UE does not report *interBandMRDC-WithOverlapDL-Bands-r16* on this band pair, provided the cell specific reference signals

from the PSCell or activated SCell and the E-UTRA dormant SCell being measured are available in the same slot.

Where X3 and Y3 are defined in Table 8.2.1.2.5.2-1.

8.2.1.2.5.4 Interruptions during RRM measurements on dormant E-UTRAN SCC

When one E-UTRA SCell in MCG is dormant, the UE is allowed due to RRM measurements on the E-UTRA SCC with the dormant E-UTRA SCell:

- an interruption on PSCell or any activated SCell with up to 0.5% probability of missed ACK/NACK.

Each interruption shall not exceed

- X3 slot, if the PSCell or activated SCell is not in the same band as the E-UTRA dormant SCC being measured, or
- X3 slot, if the PSCell or activated SCell is in the band overlapping or partially overlapping with the E-UTRA dormant SCC being measured and UE reports *interBandMRDC-WithOverlapDL-Bands-r16* on this band pair, or
- Y3 slot + SMTC duration, if the PSCell or activated SCell is in the same band or in the band overlapping or partially overlapping with the E-UTRA dormant SCC being measured, and UE does not report *interBandMRDC-WithOverlapDL-Bands-r16* on this band pair, provided the cell specific reference signals from the PSCell or activated SCell and the E-UTRA dormant SCC being measured are available in the same slot.

Where X3 and Y3 are defined in Table 8.2.1.2.5.2-1.

8.2.1.2.6 Interruptions at UL carrier RRC reconfiguration

The requirements in this clause shall apply when a supplementary UL carrier or an UL carrier is configured or de-configured in NR non-standalone operation as defined in TS 38.331 [2].

When an UL carrier or supplementary UL carrier is configured or de-configured, an interruption of up to X4 slot, is allowed during the RRC reconfiguration procedure [2] on E-UTRA PCell, all activated E-UTRA SCells, PSCell and all activated SCells within the same FR as the reconfigured uplink carrier. The interruption is for both uplink and downlink of E-UTRA PCell, all activated E-UTRA SCells, PSCell and all activated SCells within the same FR as the configured or de-configured UL.

Table 8.2.1.2.6-1: Interruption length X4 at UL carrier RRC reconfiguration

μ	NR Slot length (ms)	Interruption length X4 (slots)	
		Sync	Async
0	1	1	2
1	0.5	2	3
2	0.25	5	
3	0.125	9	

8.2.1.2.7 Interruptions due to Active BWP switching Requirement

The requirements for DCI-based BWP switch, timer-based BWP switch or UL BWP switch triggered by consistent uplink CCA failures in this clause apply to the case that the BWP switch is performed on a single CC or multiple CCs.

When either of the DCI-based, timer-based or RRC-based downlink BWP switch and/or uplink BWP switch occur on multiple CCs simultaneously or over partially overlapping period, the interruption requirements described in this clause apply for each BWP switch.

When UE receives a DCI indicating UE to switch its active BWP involving changes in any of the parameters listed in Table 8.2.1.2.7-2, the UE is allowed to cause interruption of up to X slot to other active serving cells if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.1.2.7-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.1.2.7-1. The starting time of interruption is only allowed within the BWP switching delay $T_{\text{BWPswitchDelay}}$ as defined in clause 8.6.2 when BWP switch occurs on a single CC. The starting time of interruption caused by each BWP switch is only allowed within the BWP switch delay $T_{\text{MultipleBWPswitchDelay}} + Y$ as defined in clause 8.6.2A.1 when BWP switch occurs on multiple CCs. Interruptions are not allowed during BWP switch involving any other parameter change.

When a BWP timer *bwp-InactivityTimer* defined in TS 38.331 [2] expires, UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 8.2.1.2.7-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.1.2.7-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.1.2.7-1. The starting time of interruption is only allowed within the BWP switching delay $T_{\text{BWPswitchDelay}}$ as defined in clause 8.6.2 when BWP switch occurs on a single CC. The starting time of interruption caused by each BWP switch is only allowed within the BWP switch delay $T_{\text{MultipleBWPswitchDelay}}$ as defined in clause 8.6.2B.1 when BWP switch occurs on multiple CCs simultaneously or $T_{\text{MultipleBWPswitchDelayTotal}}$ as defined in clause 8.6.2B.2 when BWP switch occurs on multiple CCs over partially overlapping time period. Interruptions are not allowed during BWP switch involving any other parameter change.

When UE receives an RRC reconfiguration that only requests UE to switch its active BWP on one single CC, the UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 8.2.1.2.7-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.1.2.7-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.1.2.7-1. The interruption is only allowed within the delay $T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}$ defined in clause 8.6.3 when BWP switch occurs on a single CC. The interruption is only allowed within the delay $T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}} + D_{\text{RRC}} \cdot (N-1)$ as defined in clause 8.6.3A when BWP switch occurs on multiple CCs.

When UL BWP switch is triggered by consistent uplink CCA failures [7], the UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active UL BWP involving changes in any of the parameters listed in Table 8.2.1.2.7-2 if the UE is not capable of per-FR gap, or if the UL BWP switching involves SCS changing. When the UL BWP switch imposes changes in any of the parameters listed in Table 8.2.1.2.7-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing UL BWP switching. X is defined in Table 8.2.1.2.7-1. The starting time of interruption is only allowed within the UL BWP switching delay $T_{\text{BWPswitchDelay}}$ as defined in clause 8.6.2. Interruptions are not allowed during UL BWP switch involving other parameter change.

Table 8.2.1.2.7-1: interruption length X

μ	NR Slot length (ms)	Interruption length X (slots)
0	1	1
1	0.5	1
2	0.25	3
3	0.125	5
Note1: void		

Table 8.2.1.2.7-2: Parameters which cause interruption other than SCS

Parameters	Comment
<i>locationAndBandwidth</i>	From TS 38.331 [2]
<i>nrofSRS-Ports</i>	
<i>maxMIMO-Layers-r16</i>	

8.2.1.2.8 Interruptions at direct SCell activation and hibernation

8.2.1.2.8.1 Interruptions during direct SCell activation and hibernation of E-UTRA SCell

When one E-UTRA SCell in MCG is directly activated and hibernated:

- the UE is allowed an interruption on any active serving cell in SCG:
 - of up to X1 slots, if the active serving cell is not in the same band as any of the E-UTRA SCells being directly activated or hibernated, or
 - of up to X1 slots, if the active serving cell is in the band overlapping or partially overlapping with any of the E-UTRA SCells being directly activated or hibernated and UE reports *interBandMRDC-WithOverlapDL-Bands-r16* on this band pair, or
 - of up to $\max\{Y1 \text{ slots} + T_{\text{SMTC_duration}}, 5\text{ms}\}$ if the active serving cells are in the same band or in the band overlapping or partially overlapping with any of the E-UTRA SCells being directly activated or hibernated, and UE does not report *interBandMRDC-WithOverlapDL-Bands-r16* on this band pair, provided the cell specific reference signals from the active serving cells and the E-UTRA SCells being directly activated or hibernated are available in the same slot, where $T_{\text{SMTC_duration}}$ is the longest SMTC duration among all above active serving cells in MCG Where X1 and Y1 are specified in Table 8.2.1.2.3-1.

8.2.1.2.8.2 Interruptions during direct SCell activation

When one or multiple SCell(s) in SCG are directly activated at SCell addition:

- the UE is allowed an interruption on any active serving cell in SCG:
 - of up to X1 slot, if the active serving cell is not in the same band as the SCell being directly activated, or
 - of up to $\max\{Y1 \text{ slot} + T_{\text{SMTC_duration}}, 5\text{ms}\}$ if the active serving cells are in the same band as the SCell being directly activated, provided the cell specific reference signals from the active serving cells and the SCell being directly activated are available in the same slot, where $T_{\text{SMTC_duration}}$ is the longest SMTC duration among all above active serving cells in SCG.

Where X1 and Y1 are specified in Table 8.2.1.2.3-2.

8.2.1.2.9 Interruptions at SCell hibernation

When one E-UTRA SCell in MCG is hibernated:

- the UE is allowed an interruption on any active serving cell in SCG:
 - of up to X2 slots, if the active serving cell is not in the same band as any of the E-UTRA SCells being hibernated, or
 - of up to X2 slots, if the active serving cell is in the band overlapping or partially overlapping with any of the E-UTRA SCells being hibernated and UE reports *interBandMRDC-WithOverlapDL-Bands-r16* on this band pair, or
 - of up to $\max\{Y2 \text{ slots} + T_{\text{SMTC_duration}}, 5\text{ms}\}$ if the active serving cells are in the same band or in the same band overlapping or partially overlapping with any of the E-UTRA SCells being hibernated, and UE does not report *interBandMRDC-WithOverlapDL-Bands-r16* on this band pair, provided the cell specific reference signals from the active serving cells and the E-UTRA SCells being hibernated are available in the same slot, where $T_{\text{SMTC_duration}}$ is the longest SMTC duration among all above active serving cells in MCG.

Where X2 and Y2 are specified in Table 8.2.1.2.4-1.

8.2.1.2.10 Interruptions at SCell activation/deactivation with multiple downlink SCells

The requirements in this clause shall apply for the UE configured with PSCell and up to 6 downlink SCell(s).

When multiple SCells in SCG are activated or deactivated by one single MAC CE command:

- an interruption on any serving cell in SCG is specified as in clause 8.2.1.2.4.

8.2.1.2.11 Interruptions due to UE-specific CBW change

When UE receives an RRC reconfiguration that changes *offsetToCarrier* or *carrierBandwidth*, the UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its CBW. X is defined in Table 8.2.1.2.11-1. The interruption is only allowed within the delay $T_{\text{RRCprocessingDelay}} + T_{\text{CBWchangeDelayRRC}}$ defined in clause 8.7.

Table 8.2.1.2.11-1: interruption length X

μ	NR Slot length (ms)	Interruption length X (slots)
0	1	1
1	0.5	1
2	0.25	3
3	0.125	5

8.2.1.2.12 Interruptions at NR SRS carrier based switching

SRS transmission can be configured on a carrier not configured for PUCCH/PUSCH transmission. When a UE needs to transmit periodic, semi-persistent or aperiodic SRS on a carrier of a serving cell not configured for PUCCH/PUSCH transmission, the UE can perform carrier based switching to one or more carriers not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission or from a carrier not configured for PUCCH/PUSCH transmission prior to transmitting SRS, provided that:

- switching is from a configured carrier to an active UL BWP of another activated carrier;
- the carrier of SCells not configured for PUCCH/PUSCH transmission to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission, or indicated by MAC-CE for semi-persistent SRS transmission, or configured via RRC for periodic SRS transmission;
- the serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by srs-SwitchFromServCellIndex and srs-SwitchFromCarrier in TS38.331 [2];
- the SRS switching is not colliding with any other transmission with higher priority defined in TS 38.214 [26].
- the SRS switching is not colliding with any SSB/CSI-RS based L3 measurements and the measurements for RLM/BFD in SCG.
- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 38.331 [2], and is compliant to the requirements for inter-band CA with uplink in one NR band and without simultaneous Rx/Tx specified in TS 38.101-3 [20], the SRS transmission are not simultaneously scheduled with DL SSB/CSI-RS for L3 or L1 measurements transmission on other carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR1 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 8.2.1.2.12-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR2 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 8.2.1.2.12-2.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR1 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 8.2.1.2.12-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR2 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 8.2.1.2.12-2.

Table 8.2.1.2.12-1: Interruption length X1 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us) ^{Note 1}	Interruption length X1 (slots)	
			Sub carrier spacing for agressor cell (kHz)	
			15	30
0	1	≤ 200	2	2
		300, 500	2	2
		900	3	3
1	0.5	≤ 200	3	2
		300, 500	3	3
		900	4	4
2	0.25	≤ 200	4	3
		300, 500	5	4
		900	7	6
3	0.125	≤ 200	7	5
		300, 500	9	7
		900	12	10
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter <i>SRS-SwitchingTimeNR</i> .				

Table 8.2.1.2.12-2: Interruption length X2 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us) ^{Note}	Interruption length X2 (slots)	
			Sub carrier spacing for aggressor cell (kHz)	
			60	120
0	1	≤ 200	2	2
1	0.5	≤ 200	2	2
2	0.25	≤ 200	3	3
3	0.125	≤ 200	4	4
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter <i>SRS-SwitchingTimeNR</i> .				

For intra-band SRS carrier switching in FR1 or FR2, interruptions in Table 8.2.1.2.12-1 and in Table 8.2.1.2.12-2 based on SRS carrier switching time $\leq 200\mu\text{s}$ shall apply. For inter-band SRS carrier switching in FR1, interruptions in Table 8.2.1.2.12-1 and in Table 8.2.1.2.12-2 shall apply.

8.2.1.2.13 Interruptions at E-UTRA SRS carrier based switching

A PUSCH-less carrier of E-UTRA SCell is a TDD carrier without PUCCH/PUSCH configured. When a UE needs to transmit periodic or aperiodic SRS [23] and/or non-contention based PRACH on a PUSCH-less carrier of E-UTRA SCell, the UE can perform carrier based switching to one or more PUSCH-less carrier of E-UTRA SCells from a E-UTRA carrier with PUSCH or from another PUSCH-less E-UTRA carrier of SCell prior to transmitting SRS and/or PRACH, provided that:

- switching is from a configured E-UTRA carrier to another activated TDD E-UTRA carrier;
- the PUSCH-less carrier of E-UTRA SCells to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission or configured via RRC [15] for periodic SRS transmission;
- the E-UTRA serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by *srs-SwitchFromServCellIndex* [15];

- the SRS switching is not colliding with any other transmission with higher priority defined in TS36.213 [26];
- the SRS switching is not colliding with PDCCH in subframe 0 and 5 as specified in TS36.213 [26];
- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 36.331 [2], and is compliant to the requirements for inter-band CA with uplink in one E-UTRA band and without simultaneous Rx/Tx specified in TS 36.101 [25], the SRS or RACH transmission are not simultaneously scheduled with DL subframe #0 or DL subframe #5 on other E-UTRA carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between E-UTRA carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR1 if UE is capable of Per-FR gap, during the switching to the PUSCH-less carrier of a serving cell,

- with up to X3 slot as specified in Table 8.2.1.2.13-1.

When SRS carrier based switching is performed between E-UTRA carriers, the UE is allowed interruptions on any active serving cell in SCG if UE is not capable of Per-FR gap, or on active serving cell(s) in SCG in FR1 if UE is capable of Per-FR gap, during the switching from the PUSCH-less carrier of a serving cell,

- with up to X3 slot as specified in Table 8.2.1.2.13-1

Table 8.2.1.2.13-1: Interruption length X3 (slot)

μ	NR Slot length (ms)	Interruption length X3 (slots)
0	1	2
1	0.5	3
2	0.25	5
3	0.125	9

8.2.1.2.14 DL Interruptions at switching between two uplink carriers

The DL interruption requirements at dynamic switching between two uplink carriers specified in this clause are applicable for an uplink band pair of an inter-band EN-DC configuration when the capability *uplinkTxSwitchingPeriod* is present, and is only applicable for uplink switching mechanism specified in clause 6.1.6 of TS 38.214 [26], where E-UTRA UL carrier is capable of one transmit antenna connector and NR UL carrier is capable of two transmit antenna connectors, and the two uplink carriers are in different bands with different carrier frequencies.

When dynamic switching between two uplink carriers is conducted, UE is allowed to cause DL interruption of X OFDM symbols in NR downlink carrier(s) as indicated by *uplinkTxSwitching-DL-Interruption* [2]. The DL interruption starts from the first OFDM symbol which fully or partially overlaps with the UL switching period located in NR carrier. The DL interruption lengths of X for NR carrier(s) are defined in Table 8.2.1.2.14-1.

No DL interruption is allowed in the NR downlink carrier(s) which is not indicated by *uplinkTxSwitching-DL-Interruption*. No DL interruption is allowed for some inter-band EN-DC configurations as specified in clause 5.5B.4 of TS 38.101-3 [20].

Table 8.2.1.2.14-1: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink carriers

μ	NR Slot length (ms)	Uplink Tx switching period Note1	
		35us	140us
0	1	2	3
1	0.5	3	6
2	0.25	4	10
Note 1: Uplink Tx switching period depends on UE capability <i>uplinkTxSwitchingPeriod</i> .			

8.2.1.2.15 Interruptions due to SCell dormancy

8.2.1.2.15.1 Interruptions due to SCell dormancy switch

When one SCell in SCG is switched from dormancy to non-dormancy or from non-dormancy to dormancy [7] when UE is in DRX active time,

- the UE is allowed an interruption on active serving cell in SCG as defined in clause 8.2.1.2.7, except that the interruption is allowed regardless of which parameters change between the dormant BWP and the non-dormant BWP
- The starting time of interruption shall be within the dormancy switching delay as defined in clause 8.6.2.

When multiple SCells in SCG are switched from dormancy to non-dormancy or vice versa when the UE is in DRX active time, the interruption requirement described above applies for each BWP switch.

8.2.1.2.15.2 Interruptions due to CQI measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of CQI measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from CQI measurements on dormant SCells shall not exceed 0.5%.

8.2.1.2.15.3 Interruptions due to RRM measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of RRM measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from RRM measurements on dormant SCells shall not exceed 1.0%.

8.2.1.2.16 Interruptions when identifying CGI of an NR cell with autonomous gaps

When a UE is identifying CGI of an NR cell with autonomous gaps, the UE is allowed interruptions on PSCell or any activated SCell:

- with up to K1 interruptions with interrupted slots up to interruption length X1 specified in Table 8.2.1.2.16-1 for each interruption during MIB decoding time period T_{MIB} (ms) specified in clause 9.11.
- with up to L1 interruptions with interrupted slots up to interruption length Y1 specified in Table 8.2.1.2.16-1 for each interruption during SIB1 decoding time period T_{SIB1} (ms) specified in clause 9.11 for SSB and CORESET for RMSI scheduling multiplexing patterns 1.
- with up to L2 interruptions with interrupted slots up to interruption length Y2 specified in Table 8.2.1.2.16-1 for each interruption during SIB1 decoding time period T_{SIB1} (ms) specified in clause 9.11 for SSB and CORESET for RMSI scheduling multiplexing patterns 2 and 3.

Where:

- $K1 = 6$ for the target cell carrier frequency on FR1 and $K1 = 25$ for the target cell carrier frequency on FR2, and
- $L1 = T_{\text{SIB1}}/20$, and
- $L2 = T_{\text{SIB1}}/T_{\text{SMTc}}$, where T_{SMTc} is the periodicity of the SMTc occasion configured for the target cell carrier.

Table 8.2.1.2.16-1: Interruption length X1, Y1 and Y2 during measurements with autonomous gaps

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)	Interruption length Y1 (slots)	Interruption length Y2 (slots)
0	1	6	7	6
1	0.5	12	13	10
2	0.25	24	25	19

3	0.125	48	49	37
---	-------	----	----	----

8.2.1.2.17 Interruptions when identifying CGI of an E-UTRA cell with autonomous gaps

When a UE is identifying CGI of an E-UTRA FDD cell or E-UTRA TDD cell with autonomous gaps, within time period

- $T_{\text{identify_CGI, intra}}$ specified in clause 8.1.2.2.3, or clause 8.1.2.2.4 in TS 36.133 [15], or
- $T_{\text{identify_CGI, inter}}$ specified in clause 8.1.2.3.5, or clause 8.1.2.3.6, or clause 8.1.2.3.7, or clause 8.1.2.3.6 in TS 36.133 [15], or
- $T_{\text{identify_CGI, E-UTRA}}$ specified in clause 9.4.7.1

the UE shall be able to transmit at least the number of ACK/NACKs specified in Table 8.2.1.2.17-1 on PSCell or any activated SCell in the frequency range where autonomous gaps are used, provided that:

- there is continuous DL data allocation,
- no DRX cycle is used,
- no measurement gaps are configured,
- only one code word is transmitted in each slot,
- 2 slot ACK/NACK feedback is configured,
- 20 ms SMTC period is configured.

Table 8.2.1.2.17-1: Minimum number of ACK/NACKs transmitted by the UE

Minimum number of transmitted ACK/NACKs	Configuration of the serving cell in which the transmitted ACK/NACKs are counted	
	Duplex mode configuration	SCS
84	FDD	15 kHz
193	FDD	30 kHz
402	FDD	60 kHz
28	TDD ^{Note 1}	15 kHz
81	TDD ^{Note 1}	30 kHz
159	TDD ^{Note 1}	60 kHz
233	TDD ^{Note 2}	60 kHz
491	TDD ^{Note 2}	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18].		
NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

8.2.1.2.18 Interruptions at NR SRS antenna port switching

The requirements in this clause are applicable to SRS antenna port switching on FR1 and SRS resource(s) is only configured within the last 6 symbols of a slot. For interruption caused by SRS antenna port switching, the victim cell is based on the entry number of the band indicated by *txSwitchImpactToRx* and/or *txSwitchWithAnotherBand* regardless of per-FR MG capability. An UL interruption is allowed on any of the serving cells as indicated in *txSwitchWithAnotherBand*, and a DL interruption is allowed on any of the serving cells as indicated in *txSwitchImpactToRx*.

The UE shall perform SRS antenna port switching only if the below conditions are met.

- the SRS switching is not colliding with any other UL transmission with higher priority defined in TS 38.214 [26] if the serving cell on which the higher priority transmission is performed is a victim cell based on *txSwitchWithAnotherBand* or is the same carrier on which SRS is transmitted.
- the SRS switching is not colliding with any NR measurements (i.e. SSB/CSI-RS based L1/L3 measurements) and the measurements for RLM/BFD/CBD if the serving cell on which the NR measurements and the

measurements for RLM/BFD/CBD is performed is a victim cell based on *txSwitchImpactToRx* or is the same carrier on which SRS is transmitted.

No requirements are defined for SRS antenna port switching if aperiodic SRS switching is colliding with aperiodic L1-RSRP/L1-SINR measurements and the serving cell on which the aperiodic L1-RSRP/L1-SINR measurement is configured is indicated in *txSwitchImpactToRx* or is the same carrier on which aperiodic SRS is scheduled/configured.

No requirements apply when SRS antenna port switching is colliding with E-UTRA measurement if the carrier on which the E-UTRA measurement is performed is indicated in *txSwitchImpactToRx* or is the same carrier on which SRS is scheduled/configured. When 1 SRS symbol is configured in a slot for SRS antenna switching and the aggressor and victim cells are synchronized, the interruption requirement in Table 8.2.1.2.18-1 applies.

When 1 SRS symbol is configured in a slot for SRS antenna switching and the aggressor and victim cells are asynchronized, the interruption requirement in Table 8.2.1.2.18-2 applies. For the rest of SRS configurations, the interruption requirement in Table 8.2.1.2.18-3 applies.

Table 8.2.1.2.18-1: Interruption length in symbols of victim CC when 1 SRS symbol is configured, and aggressor and victim cells are synchronized

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	3	2	2
30	4	3	3
60	8	6	5
120	14	10	8

Table 8.2.1.2.18-2: Interruption length in slots of victim CC when 1 SRS symbol is configured, and aggressor and victim cells are asynchronized

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	2	2	2
30	2	2	2
60	2	2	2
120	2	2	2

Table 8.2.1.2.18-3: Interruption length in slots of victim CC for rest of the SRS configurations for synchronized and asynchronized scenarios

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	2	2	2
30	2	2	2
60	3	2	2
120	5	3	3

8.2.1.2.19 Interruptions at fast SCell activation

The requirements in this clause shall apply for the UE configured with PSCell and one SCell when aperiodic CSI-RS resources is configured for fast SCell activation.

When one SCell in SCG configured with aperiodic CSI-RS resources is configured for fast SCell activation is activated from deactivated, the UE is allowed:

- an interruption on any serving cell in SCG:
- of up to X2 slot, if the active serving cell and the SCell being activated are in a FR1 band pair or in a FR1+FR2 band pair.
- of up to X2 slot, if the active serving cells and the SCells being activated are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair.

or

- of up to Y2 slot + $T_{\text{ATRS_duration}}$ if the active serving cells are in the same band as any of the SCells being activated, when
- SCell to be activated is known and belongs to FR1, if the measurement period of the SCell being activated is larger than 2400ms, or
- SCell is unknown and belongs to FR1, and SCell is contiguous to an active serving cell in the same band

or

- of up to Y2 slot if the active serving cells are in the same band as any of the SCells being activated, when
 - SCell to be activated is known and belongs to FR1, if the measurement period of the SCell being activated is equal to or smaller than 2400ms, or
- SCell to be activated belongs to FR2

Where:

- $T_{\text{ATRS_duration}}$ is CSI-RS burst for SCell activation where the CSI-RS burst is defined as four CSI-RS resources in two consecutive slots on the being activated SCell.
- X2 and Y2 are specified in Table 8.2.1.2.4-2.

8.2.1.2.20 Interruptions due to PUCCH SCell activation/deactivation

When one SCell in SCG configured with PUCCH is activated or deactivated,

The UE is allowed an interruption on active serving cell in SCG as defined in clause 8.2.1.2.4.

- The starting time of interruption shall be within the delay as defined in clause 8.3.12.
- For inter-band CA, if the UE is not capable of *parallelTxPRACH-SRS-PUCCH-PUSCH*, additional interruption is allowed on SRS/PUCCH/PUSCH of active serving cells when colliding with RACH transmission on PUCCH SCell. . Interruption occurs on the symbols containing SRS/PUCCH/PUSCH, which overlap with the duration of the PRACH preamble [3] transmitted on the PUCCH SCell.

8.2.2 SA: Interruptions with Standalone NR Carrier Aggregation

8.2.2.1 Introduction

This clause contains the requirements related to the interruptions on PCell and activated SCell if configured, when

up to 7 SCells are configured, de-configured, activated or deactivated, or

a supplementary UL carrier or an UL carrier is configured or de-configured, or

measurements on SCC with deactivated SCell in NR SCG, or

UL/DL BWP is switched on PCell or SCell, or

CGI reading of an NR neighbour cell with autonomous gaps, or

CGI reading of an E-UTRA neighbour cell with autonomous gaps.

UE-specific CBW is changed on PCell or SCell, or

NR SRS carrier based switching, or

NR SRS antenna port switching, or

UE dynamic Tx switches between two uplink carriers, or
SCell is activated based on aperiodic CSI-RS.

Note: interruptions at SCell addition/release, activation/deactivation and during measurements on SCC may not be required by all UEs.

The interruptions shall not interrupt RRC signalling or ACK/NACKs related to RRC reconfiguration procedure according to TS38.331 [2] for SCell addition/release or MAC control signalling according to TS37.340 [17] for SCell activation/deactivation command.

This clause additionally contains requirements related to interruptions at inter-frequency SFTD between PCell in FR1 and neighbour cell in FR2.

For a UE which does not support per-FR measurement gap, interruptions to the PCell and activated SCell may be caused by SCells on any frequency range. For a UE which supports per-FR gaps, interruptions to PCell and activated SCell may be caused by SCells on the same frequency range as the victim cell.

In addition to standalone NR carrier aggregation when no CCA is configured, the requirements in clause 8.2.2. and all subclauses of 8.2.2 apply when the UE is configured with

- A PCell not using CCA in downlink and one or more SCells using CCA in downlink or
- A PCell and one or more SCells using CCA in downlink

8.2.2.2 Requirements

8.2.2.2.1 Interruptions at SCell addition/release

When any number of SCells between one and 7 is added or released using the same *RRCConnectionReconfiguration* message as defined in TS 38.331 [2], the UE is allowed an interruption on any active serving cell during the RRC reconfiguration procedure as follows:

- an interruption on any active serving cell:
 - of up to X1 slot, if the active serving cell and the SCell being added or released are in a FR1 band pair or in a FR1+FR2 band pair.
 - of up to X1 slot, if the active serving cell and the SCell being added or released are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair.

Where X1 is specified in Table 8.2.2.2.1-1.

or

- of up to the duration shown in table 8.2.2.2.1-2, if the active serving cells are in the same band as any of the SCells being added or released, provided the cell specific reference signals from the active serving cells and the SCells being added or released are available in the same slot.

Table 8.2.2.2.1-1: Interruption length X1 for SCell addition/release for inter-band CA

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)	
0	1	1	
1	0.5	2	
2	0.25	Both aggressor cell and victim cell are on FR2	4
		Either aggressor cell or victim cell is on FR1	5
3	0.125	Aggressor cell is on FR2	8
		Aggressor cell is on FR1	9
5	0.03125	Aggressor cell is on FR1	33
6	0.015625	Aggressor cell is on FR1	65

Table 8.2.2.2.1-2: Interruption duration for SCell addition/release for intra-band CA

μ	NR Slot length (ms)	Interruption length (slots)
0	1	$1 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
1	0.5	$2 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
2	0.25	$4 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
3	0.125	$8 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
5	0.03125	$32 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
6	0.015625	$64 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
NOTE 1: $T_{\text{SMTC_duration}}$ measured in subframes is - the longest SMTC duration among all above active serving cells and the SCell being added when one SCell is added. If SSB configuration (<i>absoluteFrequencySSB</i>) but no SMTC configuration is provided for the SCell being added, the SSB transmission periodicity is assumed to be 5ms and $T_{\text{SMTC_duration}}$ for the SCell being added is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being added. If no SSB configuration (<i>absoluteFrequencySSB</i>) nor SMTC configuration is provided for the SCell being added, $T_{\text{SMTC_duration}}$ for the SCell being added is 0ms; - the longest SMTC duration among all active serving cells in the same band when one SCell is released. NOTE 2: $N_{\text{slot}}^{\text{subframe}, \mu}$ is as defined in TS 38.211 [6].		

8.2.2.2.2 Interruptions at SCell activation/deactivation

When an SCell is activated or deactivated as defined in TS 37.340 [17], the UE is allowed

- an interruption on any active serving cell:
 - of up to X2 slot, if the active serving cell and the SCell being activated or deactivated are in a FR1 band pair or in a FR1+FR2 band pair.
 - of up to X2 slot, if the active serving cell and the SCell being activated or deactivated are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair.

Where X2 is specified in Table 8.2.2.2.2-1.

or

- of up to the duration shown in table 8.2.2.2.2-2, if the active serving cells are in the same band as any of the SCells being activated or deactivated provided the cell specific reference signals from the active serving cells and the SCells being activated or deactivated are available in the same slot.

Table 8.2.2.2.2-1: Interruption length X2 for SCell activation/deactivation for inter-band CA

μ	NR Slot length (ms) of victim cell	Interruption length X2 (slots)	
0	1		1
1	0.5		1
2	0.25	Both aggressor cell and victim cell are on FR2	2

		Either aggressor cell or victim cell is on FR1	3
3	0.125	Aggressor cell is on FR2	4
		Aggressor cell is on FR1	5
5	0.03125	Aggressor cell is on FR1	17
6	0.015625	Aggressor cell is on FR1	33

Table 8.2.2.2-2: Interruption duration for SCell activation/deactivation for intra-band CA

μ	NR Slot length (ms)	Interruption length (slots)
0	1	$1 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
1	0.5	$1 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
2	0.25	$2 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
3	0.125	$4 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
5	0.03125	$16 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
6	0.015625	$32 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
NOTE 1: $T_{\text{SMTC_duration}}$ measured in subframes is - the longest SMTC duration among all above active serving cells and the SCell being activated when one SCell is activated. If SSB configuration (<i>absoluteFrequencySSB</i>) but no SMTC configuration is provided for the SCell being activated, the SSB transmission periodicity is assumed to be 5ms and $T_{\text{SMTC_duration}}$ for the SCell being activated is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being activated. If no SSB configuration (<i>absoluteFrequencySSB</i>) nor SMTC configuration is provided for the SCell being activated, $T_{\text{SMTC_duration}}$ for the SCell being activated is 0ms; - the longest SMTC duration among all active serving cells in the same band when one SCell is deactivated. NOTE 2: $N_{\text{slot}}^{\text{subframe}, \mu}$ is as defined in TS 38.211 [6].		

8.2.2.2.3 Interruptions during measurements on deactivated SCC

Interruptions on PCell or activated SCell(s) due to measurements when an SCell is deactivated are allowed with up to 0.5% probability of missed ACK/NACK when the configured *measCycleSCell* [2] is 640 ms or longer.

- If the PCell or activated SCell(s) is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on PCell or activated SCell(s) immediately before and immediately after an SMTC. Each interruption shall not exceed requirement in Table 8.2.2.2-1.

If the PCell or activated SCell(s) is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PCell or activated SCell(s) no earlier than X slots before $T_{\text{SMTC_duration}}$ and no later than X slots after $T_{\text{SMTC_duration}}$, provided the cell specific reference signals from the active serving cells and the deactivated SCell are available in the same slot, where X and $T_{\text{SMTC_duration}}$ are given by Table 8.2.2.2.3-1. The interruption shall not exceed requirements in Table 8.2.2.2.3-1.

The interruption requirements in Table 8.2.2.2.3-1 are not applicable when a UE is configured with NCSG in the same frequency range as the SCell unless the SMTC on the deactivated SCC is fully non-overlapped with NCSG.

Table 8.2.2.2.3-1: Interruption duration for measurement on deactivated SCell for intra-band CA

μ	NR Slot length (ms)	X (slots)	Interruption length (slots)
0	1	1	$2 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$

1	0.5	1	$2 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
2	0.25	2	$4 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
3	0.125	4	$8 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
5	0.03125	16	$32 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
6	0.015625	32	$64 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
NOTE 1: $T_{\text{SMTC_duration}}$ measured in subframes is the longest SMTC duration among all above active serving cells and the deactivated SCell to be measured;			
NOTE 2: $N_{\text{slot}}^{\text{subframe}, \mu}$ is as defined in TS 38.211 [6].			

8.2.2.2.4 Interruptions at UL carrier RRC reconfiguration

The requirements in this clause shall apply when a supplementary UL carrier or an UL carrier is configured or de-configured in NR standalone carrier aggregation as defined in TS 38.331 [2]. Further, the requirements in this clause are applicable to UE capable of independent beam management in FR2 inter-band CA and UE capable of FR2 intra-band CA and FR1.

When an UL carrier or supplementary UL carrier is configured or de-configured, an interruption of up to the duration shown in table 8.2.2.2.4-1, is allowed during the RRC reconfiguration procedure [2] on PCell and all activated SCells within the same FR as the reconfigured uplink carrier. The interruption is for both uplink and downlink of PCell and all the activated SCells within the same FR as the configured or de-configured UL.

Table 8.2.2.2.4-1: Interruption duration for UL carrier RRC reconfiguration

μ	NR Slot length (ms)	Interruption length (slots)
0	1	1
1	0.5	2
2	0.25	4
3	0.125	8
5	0.03125	32
6	0.015625	64

8.2.2.2.5 Interruptions due to Active BWP switching Requirement

The requirements for DCI-based BWP switch, timer-based BWP switch or UL BWP switch triggered by consistent uplink CCA failures in this clause apply to the case that the BWP switch is performed on a single CC or multiple CCs.

When either of the DCI-based, timer-based or RRC-based downlink BWP switch and/or uplink BWP switch occur on multiple CCs simultaneously or over partially overlapping period, the interruption requirements described in this clause apply for each BWP switch. Further, the requirements in this clause are applicable to UE capable of independent beam management in FR2 inter-band CA and UE capable of FR2 intra-band CA and FR1.

When UE receives a DCI indicating UE to switch its active BWP involving changes in any of the parameters listed in Table 8.2.2.2.5-2, the UE is allowed to cause interruption of up to X slot to other active serving cells if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.2.2.5-2 and the UE is capable of per-FR gap the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.2.2.5-1. The starting time of interruption is only allowed within the BWP switching delay $T_{\text{BWPswitchDelay}}$ as defined in clause 8.6.2 when BWP switch occurs on a single CC. The starting time of interruption caused by each BWP switch is only allowed within the BWP switch delay $T_{\text{MultipleBWPswitchDelay}} + Y$ as defined in clause 8.6.2A.1 when BWP switch occurs on multiple CCs. Interruptions are not allowed during BWP switch involving any other parameter change.

When a BWP timer *bwp-InactivityTimer* defined in TS 38.331 [2] expires, UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 8.2.2.2.5-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.2.2.5-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein

the UE is performing BWP switching. X is defined in Table 8.2.2.2.5-1. The starting time of interruption is only allowed within the BWP switching delay $T_{\text{BWPswitchDelay}}$ as defined in clause 8.6.2 when BWP switch occurs on a single CC. The starting time of interruption caused by each BWP switch is only allowed within the BWP switch delay $T_{\text{MultipleBWPswitchDelay}}$ as defined in clause 8.6.2B.1 when BWP switch occurs on multiple CCs simultaneously or $T_{\text{MultipleBWPswitchDelayTotal}}$ as defined in clause 8.6.2B.2 when BWP switch occurs on multiple CCs over partially overlapping time period. Interruptions are not allowed during BWP switch involving any other parameter change.

When UE receives an RRC reconfiguration that only requests UE to switch its active BWP on one single CC, the UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active BWP involving changes in any of the parameters listed in Table 8.2.2.2.5-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the BWP switch imposes changes in any of the parameters listed in Table 8.2.2.2.5-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing BWP switching. X is defined in Table 8.2.2.2.5-1. The interruption is only allowed within the delay $T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}$ defined in clause 8.6.3 when BWP switch occurs on a single CC. The interruption is only allowed within the delay $T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}} + D_{\text{RRC}} \cdot (N-1)$ as defined in clause 8.6.3A when BWP switch occurs on multiple CCs.

When UL BWP switch is triggered by consistent uplink CCA failures [7], UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its active UL BWP involving changes in any of the parameters listed in Table 8.2.2.2.5-2 if the UE is not capable of per-FR gap, or if the BWP switching involves SCS changing. When the UL BWP switch imposes changes in any of the parameters listed in Table 8.2.2.2.5-2 and the UE is capable of per-FR gap, the UE is allowed to cause interruption of up to X slot to other active serving cells in the same frequency range wherein the UE is performing UL BWP switching. X is defined in Table 8.2.2.2.5-1. The starting time of interruption is only allowed within the UL BWP switching delay $T_{\text{BWPswitchDelay}}$ as defined in clause 8.6.2. Interruptions are not allowed during BWP switch involving other parameter change.

Table 8.2.2.2.5-1: Interruption length X

μ	NR Slot length (ms)	Interruption length X (slots)
0	1	1
1	0.5	1
2	0.25	3
3	0.125	5
5	0.03125	17
6	0.015625	33
Note1: void		

Table 8.2.2.2.5-2: Parameters which cause interruption other than SCS

Parameters	Comment
<i>locationAndBandwidth</i>	From TS 38.331 [2]
<i>nrofSRS-Ports</i>	
<i>maxMIMO-Layers-r16</i>	

8.2.2.2.6 Interruptions at inter-frequency SFTD measurement

The requirements in this clause concern interruptions on PCell, as well as on activated SCells in MCG, when the UE is performing SFTD measurements on inter-frequency neighbour cell(s). The following requirements apply when no PSCell is configured.

For a UE with per-FR gap capability:

- for neighbour cell in FR1:
- the percentage of interrupted slots on uplink and downlink on FR1 serving cells during the SFTD measurement period $T_{\text{measure_SFTD1}}$ specified in Clause 9.3.8 shall not exceed the percentages specified in Table 8.2.2.2.6-1. No interruption is allowed on FR2 serving cells.

- the length of each interruption on FR1 serving cells shall not exceed the number of slots specified in Table 8.2.2.2.6-2.
- for neighbour cell in FR2:
 - the percentage of interrupted slots on uplink and downlink on FR2 serving cells during the SFTD measurement period $T_{\text{measure_SFTD1}}$ specified in Clause 9.3.8 shall not exceed the percentages specified in Table 8.2.2.2.6-1. No interruption is allowed on FR1 serving cells.
 - the length of each interruption on FR2 serving cells shall not exceed the number of slots specified in Table 8.2.2.2.6-2.

For a UE with per-UE gap capability:

- for neighbour cell in FR1 or FR2:
 - the percentage of interrupted slots on uplink and downlink on FR1 and FR2 serving cells during the SFTD measurement period $T_{\text{measure_SFTD1}}$ specified in Clause 9.3.8 shall not exceed the percentages specified in Table 8.2.2.2.6-1.
 - the length of each interruption on FR1 and FR2 serving cells shall not exceed the number of slots specified in Table 8.2.2.2.6-2.

Table 8.2.2.2.6-1: Requirements on maximum percentage of interrupted slots in serving cell in inter-frequency SFTD

SFTD configuration	Serving cell μ	Neighbour cell SMTC periodicity					
		5ms	10ms	20ms	40ms	80ms	160ms
With RSRP report	0	8.4%	6.3%	8.4%	6.3%	5.3%	4.7%
	1						
	2						
	3						
Without RSRP report	0	11.4%	8.6%	7.9%	6.8%	6.3%	6.0%
	1						
	2						
	3						

Table 8.2.2.2.6-2: Interruption duration for FR1 serving cell in inter-frequency SFTD with neighbour cell in FR1

μ	NR Slot length (ms)	Interruption length (slots)
0	1	1
1	0.5	2
2	0.25	4
3	0.125	8

Table 8.2.2.2.6-3: Void

Table 8.2.2.2.6-4: Void

8.2.2.2.7 Interruptions at SCell activation/deactivation with multiple downlink SCells

The requirements in this clause shall apply for the UE configured with PCell and up to 7 downlink SCell(s).

When multiple SCell is activated or deactivated by one single MAC CE command:

- an interruption on any active serving cell is specified as in clause 8.2.2.2.2:

8.2.2.2.8 Interruptions due to UE-specific CBW change

When UE receives an RRC reconfiguration that changes *offsetToCarrier* or *carrierBandwidth*, the UE is allowed to cause interruption of up to X slot to other active serving cells due to switching its CBW. X is defined in Table 8.2.2.2.8-1. The interruption is only allowed within the delay $T_{\text{RRCProcessingDelay}} + T_{\text{CBWchangeDelayRRC}}$ defined in clause 8.13.

Table 8.2.2.2.8-1: interruption length X

μ	NR Slot length (ms)	Interruption length X (slots)
0	1	1
1	0.5	1
2	0.25	3
3	0.125	5
5	0.03125	17
6	0.015625	33

8.2.2.2.9 Interruptions at NR SRS carrier based switching

SRS transmission can be configured on a carrier not configured for PUCCH/PUSCH transmission. When a UE needs to transmit periodic, semi-persistent or aperiodic SRS on a carrier of a serving cell not configured for PUCCH/PUSCH transmission, the UE can perform carrier based switching to one or more carriers not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission or from a carrier not configured for PUCCH/PUSCH transmission prior to transmitting SRS, provided that:

- switching is from a configured carrier to another activated carrier;
- the carrier of SCells not configured for PUCCH/PUSCH transmission to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission, or indicated by MAC-CE for semi-persistent SRS transmission, or configured via RRC for periodic SRS transmission;
- the serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by *srs-SwitchFromServCellIndex* and *srs-SwitchFromCarrier* in TS38.331 [2];
- the SRS switching is not colliding with any other transmission with higher priority defined in TS 38.214 [26].
- the SRS switching is not colliding with any SSB/CSI-RS based L3 measurements and the measurements for RLM/BFD.
- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 38.331 [2], and is compliant to the requirements for inter-band CA with uplink in one NR band and without simultaneous Rx/Tx specified in TS 38.101-1 [18] for frequency range 1 and TS 38.101-2 [19] for frequency range 2, the SRS transmission are not simultaneously scheduled with DL SSB/CSI-RS for L3 or L1 measurements transmission on other carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR1 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 8.2.2.2.9-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR2 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 8.2.2.2.9-2.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR1 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 8.2.2.2.9-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR2 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 8.2.2.2.9-2.

Table 8.2.2.2.9-1: Interruption length X1 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us) ^{Note 1}	Interruption length X1 (slots)	
			Sub carrier spacing for agressor cell (kHz)	
			15	30
0	1	≤ 200	2	2
		300, 500	2	2
		900	2	2
1	0.5	≤ 200	3	2
		300, 500	3	3
		900	4	4
2	0.25	≤ 200	4	3
		300, 500	5	4
		900	7	6
3	0.125	≤ 200	7	5
		300, 500	9	7
		900	12	10
5	0.03125	≤ 200	22	15
		300, 500	31	24
		900	44	37
6	0.015625	≤ 200	42	28
		300, 500	61	47
		900	87	73
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter <i>SRS-SwitchingTimeNR</i> .				

Table 8.2.2.2.9-2: Interruption length X2 (slot)

μ	length (ms) of victim cell	switching time (us) ^{Note 1}	Sub carrier spacing for aggressor cell (kHz)			
			60	120	480	960
0	1	≤ 200	2	2	2	2
1	0.5	≤ 200	2	2	2	2
2	0.25	≤ 200	3	3	2	2
3	0.125	≤ 200	4	4	3	3
5	0.03125	≤ 200	11	10	8	8
6	0.015625	≤ 200	21	18	15	15
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter <i>SRS-SwitchingTimeNR</i> .						

For intra-band SRS carrier switching in FR1 or FR2, interruptions in Table 8.2.2.2.9-1 and in Table 8.2.2.2.9-2 based on SRS carrier switching time $\leq 200\mu\text{s}$ shall apply. For inter-band SRS carrier switching in FR1, interruptions in Table 8.2.2.2.9-1 and in Table 8.2.2.2.9-2 shall apply.

8.2.2.2.10 DL Interruptions at UE switching between two uplink carriers

The DL interruption requirements at dynamic switching between two uplink carriers specified in this clause are applicable for an uplink band pair of an inter-band UL CA configuration in FR1 when the capability *uplinkTxSwitchingPeriod* is present, and is only applicable for uplink switching mechanism specified in clause 6.1.6 of TS 38.214 [26], where NR uplink carrier 1 is capable of one transmit antenna connector and NR uplink carrier 2 is capable of two transmit antenna connectors, and the two uplink carriers are in different bands with different carrier frequencies.

When dynamic switching between two uplink carriers is conducted, UE is allowed to cause DL interruption of X OFDM symbols in NR downlink carrier(s) as indicated by *uplinkTxSwitching-DL-Interruption* [2]. The DL interruption starts from the first OFDM symbol which fully or partially overlaps with the UL switching period located in either NR carrier 1 or carrier 2 as indicated in RRC signalling [2]. The DL interruption lengths of X are defined in Table 8.2.2.2.10-1.

No DL interruption is allowed in the NR downlink carrier(s) which is not indicated by *uplinkTxSwitching-DL-Interruption*. No DL interruption is allowed for some inter-band UL CA configurations as specified in clause 5.2A.2 of TS 38.101-1 [18].

Table 8.2.2.2.10-1: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink carriers

μ	NR Slot length (ms)	Uplink Tx switching period ^{Note1}		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
2	0.25	4	10	14
Note 1: Uplink Tx switching period depends on UE capability <i>uplinkTxSwitchingPeriod</i>				

8.2.2.2.10A DL Interruptions at UE switching between two uplink carriers with two transmit antenna connectors

The DL interruption requirements at dynamic switching between two uplink carriers specified in this clause are applicable for an uplink band pair of an inter-band UL CA configuration when the capability [*uplinkTxSwitchingPeriod2T2T*] is present, and is only applicable for uplink switching mechanism specified in clause 6.1.6 of TS 38.214 [26], where NR UL carrier 1 is capable of two transmit antenna connectors and NR UL carrier 2 is capable of two transmit antenna connectors, and the two uplink carriers are in different bands with different carrier frequencies.

When dynamic switching between two uplink carriers is conducted, UE is allowed to cause DL interruption of X OFDM symbols in NR downlink carrier(s) as indicated by *uplinkTxSwitching-DL-Interruption* [2]. The DL interruption starts from the first OFDM symbol which fully or partially overlaps with the UL switching period located in either NR carrier 1 or carrier 2 as indicated in RRC signalling [2]. The DL interruption lengths of X are defined in Table 8.2.2.2.10A-1.

No DL interruption is allowed in the NR downlink carrier(s) which is not indicated by *uplinkTxSwitching-DL-Interruption*. No DL interruption is allowed for some inter-band UL CA configurations as specified in clause 5.2A.2 of TS 38.101-1 [18].

Table 8.2.2.2.10A -1: DL interruption length on NR carrier(s) in the unit of OFDM symbols (X) for switching between two uplink carriers

μ	NR Slot length (ms)	Uplink Tx switching period ^{Note1}		
		35us	140us	210us
0	1	2	3	4
1	0.5	3	6	7
2	0.25	4	10	14
Note 1: Uplink Tx switching period depends on UE capability [<i>uplinkTxSwitchingPeriod2T2T</i>].				

8.2.2.2.10B DL Interruptions at UE switching between one uplink band with one transmit antenna connector and one uplink band with two transmit antenna connectors

The DL interruption requirements at dynamic switching between two uplink bands specified in this clause are applicable for an uplink band pair of an inter-band UL CA configuration when the capability [*uplinkTxSwitchingPeriod*] is present, and is only applicable for uplink switching mechanism specified in clause 6.1.6 of TS 38.214 [26], where NR UL carrier 1 in band A is capable of one transmit antenna connector, NR UL carrier 2 and

carrier 3 in band B are capable of two transmit antenna connectors. NR UL carrier 2 and carrier 3 are two contiguous aggregated carriers, and band A and band B are different bands with different carrier frequencies.

When dynamic switching between two uplink bands is conducted, UE is allowed to cause DL interruption of X OFDM symbols in NR downlink carrier(s) as indicated by *uplinkTxSwitching-DL-Interruption* [2]. The DL interruption starts from the first OFDM symbol which fully or partially overlaps with the UL switching period located in either NR band A or band B as indicated in RRC signalling [2]. The DL interruption lengths of X are defined in Table 8.2.2.2.10-1.

No DL interruption is allowed in the NR downlink carrier(s) which is not indicated by *uplinkTxSwitching-DL-Interruption*. No DL interruption is allowed for some inter-band UL CA configurations as specified in clause 5.2A.2 of TS 38.101-1 [18].

8.2.2.2.10C DL Interruptions at UE switching between two uplink bands with two transmit antenna connectors

The DL interruption requirements at dynamic switching between two uplink bands specified in this clause are applicable for an uplink band pair of an inter-band UL CA configuration when the capability *[uplinkTxSwitchingPeriod2T2T]* is present, and is only applicable for uplink switching mechanism specified in clause 6.1.6 of TS 38.214 [26], where NR UL carrier 1 in band A is capable of two transmit antenna connectors, NR UL carrier 2 and carrier 3 in band B are capable of two transmit antenna connectors. NR UL carrier 2 and carrier 3 are two contiguous aggregated carriers, and band A and band B are different bands with different carrier frequencies.

When dynamic switching between two uplink bands is conducted, UE is allowed to cause DL interruption of X OFDM symbols in NR downlink carrier(s) as indicated by *uplinkTxSwitching-DL-Interruption* [2]. The DL interruption starts from the first OFDM symbol which fully or partially overlaps with the UL switching period located in either NR band A or band B as indicated in RRC signalling [2]. The DL interruption lengths of X are defined in Table 8.2.2.2.10A -1.

No DL interruption is allowed in the NR downlink carrier(s) which is not indicated by *uplinkTxSwitching-DL-Interruption*. No DL interruption is allowed for some inter-band UL CA configurations as specified in clause 5.2A.2 of TS 38.101-1 [18].

8.2.2.2.11 Interruptions at direct SCell activation

When one or multiple SCell(s) are directly activated at SCell addition,

- the UE is allowed an interruption on any active serving cell:
 - of up to the duration shown in Table 8.2.2.2.1-1, if the active serving cell is not in the same band as the SCell being directly activated, or
 - of up to the duration shown in Table 8.2.2.2.1-2, if the active serving cells are in the same band as the SCell being activated provided the cell specific reference signals from the active serving cells and the SCell being activated are available in the same slot.

8.2.2.2.12 Interruptions due to SCell dormancy

8.2.2.2.12.1 Interruptions due to SCell dormancy switch

When one SCell in MCG is switched from dormancy to non-dormancy or from non-dormancy to dormancy [7] when UE is in DRX active time,

- the UE is allowed an interruption on active serving cell in MCG as defined in clause 8.2.2.2.5, except that the interruption is allowed regardless of which parameters change between the dormant BWP and the non-dormant BWP
- The starting time of interruption shall be within the dormancy switching delay as defined in clause 8.6.2.

When multiple SCells in MCG are switched from dormancy to non-dormancy or vice versa when the UE is in DRX active time, the interruption requirement described above applies for each BWP switch.

8.2.2.2.12.2 Interruptions due to CQI measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of CQI measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from CQI measurements on dormant SCells shall not exceed 0.5%.

8.2.2.2.12.3 Interruptions due to RRM measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of RRM measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from RRM measurements on dormant SCells shall not exceed 1.0%.

8.2.2.2.13 Interruptions at transitions between active and non-active during DRX

For the UEs that are capable of *secondaryDRX-Group*[14] in FR1+FR2 CA, when two DRX groups are configured each group of serving cells, no interruption is allowed for UEs supporting either per UE or per FR gaps.

8.2.2.2.14 Interruptions when identifying CGI of an NR cell with autonomous gaps

When a UE is identifying CGI of an NR cell with autonomous gaps, the UE is allowed interruptions on PCell or any activated SCell:

- with up to K1 interruptions with interrupted slots up to interruption length X1 specified in Table 8.2.2.2.14-1 for each interruption during MIB decoding time period T_{MIB} (ms) specified in clause 9.11.
- with up to L1 interruptions with interrupted slots up to interruption length Y1 specified in Table 8.2.2.2.14-1 for each interruption during SIB1 decoding time period T_{SIB1} (ms) specified in clause 9.11 for SSB and CORESET for RMSI scheduling multiplexing patterns 1.
- with up to L2 interruptions with interrupted slots up to interruption length Y2 specified in Table 8.2.2.2.14-1 for each interruption during SIB1 decoding time period T_{SIB1} (ms) specified in clause 9.11 for SSB and CORESET for RMSI scheduling multiplexing patterns 2 and 3.

Where:

- $K1 = 6$ for the target cell carrier frequency on FR1 and $K1 = 25$ for the target cell carrier frequency on FR2, and
- $L1 = T_{SIB1}/20$ and
- $L2 = T_{SIB1}/T_{SMTc}$, where T_{SMTc} is the periodicity of the SMTc occasion configured for the target cell carrier.

Table 8.2.2.2.14-1: Interruption length X1, Y1 and Y2 during measurements with autonomous gaps

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)	Interruption length Y1 (slots)	Interruption length Y2 (slots)
0	1	6	7	6
1	0.5	12	13	10
2	0.25	24	25	19
3	0.125	48	49	37

8.2.2.2.15 Interruptions when identifying CGI of an E-UTRA cell with autonomous gaps

When a UE is identifying CGI of an E-UTRA FDD cell or E-UTRA TDD cell with autonomous gaps, within time period $T_{identify_CGI, E-UTRA}$ specified in clause 9.4.7.1, the UE shall be able to transmit at least the number of ACK/NACKs specified in Table 8.2.2.2.15-1 on PCell or any activated SCell in the frequency range where autonomous gaps are used, provided that:

- there is continuous DL data allocation,

- no DRX cycle is used,
- no measurement gaps are configured,
- only one code word is transmitted in each slot,
- 2 slot ACK/NACK feedback is configured,
- 20 ms SMTC period is configured.

Table 8.2.2.2.15-1: Minimum number of ACK/NACKs transmitted by the UE during $T_{\text{identify_CGI}}$, E-UTRA

Minimum number of transmitted ACK/NACKs	SCS	
	Duplex mode configuration	SCS
	Duplex mode configuration	SCS
84	FDD	15 kHz
193	FDD	30 kHz
402	FDD	60 kHz
28	TDD ^{Note 1}	15 kHz
81	TDD ^{Note 1}	30 kHz
159	TDD ^{Note 1}	60 kHz
233	TDD ^{Note 2}	60 kHz
491	TDD ^{Note 2}	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18].		
NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

8.2.2.2.16 Interruptions at NR SRS antenna port switching

The requirements in this clause are applicable to SRS antenna port switching on FR1 and SRS resource(s) is only configured within the last 6 symbols of a slot. For interruption caused by SRS antenna port switching, the victim cell is based on the entry number of the band indicated by *txSwitchImpactToRx* and/or *txSwitchWithAnotherBand* regardless of per-FR MG capability. An UL interruption is allowed on any of the serving cells as indicated in *txSwitchWithAnotherBand*, and a DL interruption is allowed on any of the serving cells as indicated in *txSwitchImpactToRx*.

The UE shall perform SRS antenna port switching only if the below conditions are met.

- the SRS switching is not colliding with any other UL transmission with higher priority defined in TS 38.214 [26] if the serving cell on which the higher priority transmission is performed is a victim cell based on *txSwitchWithAnotherBand* or is the same carrier on which SRS is transmitted.
- the SRS switching is not colliding with any NR measurements (i.e. SSB/CSI-RS based L1/L3 measurements) and the measurements for RLM/BFD/CBD if the serving cell on which the NR measurements and the measurements for RLM/BFD/CBD is performed is a victim cell based on *txSwitchImpactToRx* or is the same carrier on which SRS is transmitted.

No requirements are defined for SRS antenna port switching if aperiodic SRS switching is colliding with aperiodic L1-RSRP/L1-SINR measurements and the serving cell on which the aperiodic L1-RSRP/L1-SINR measurement is configured is indicated in *txSwitchImpactToRx* or is the same carrier on which aperiodic SRS is scheduled/configured.

When 1 SRS symbol is configured in a slot for SRS antenna switching, the interruption requirement in Table 8.2.2.2.16-1 applies. For the rest of SRS configurations, the interruption requirement in Table 8.2.2.2.16-3 applies.

Table 8.2.2.2.16-1: Interruption length in symbols of victim CC when 1 SRS symbol is configured

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	3	2	2
30	4	3	3

60	8	6	5
120	14	10	8

Table 8.2.2.2.16.2: Void**Table 8.2.2.2.16-3: Interruption length in slots of victim CC for rest of the SRS configurations**

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	2	2	2
30	2	2	2
60	3	2	2
120	5	3	3

8.2.2.2.17 Interruptions at fast SCell activation

The requirements in this clause shall apply for the UE configured with PCell and one SCell when aperiodic CSI-RS resources is configured for fast SCell activation.

When one SCell in MCG configured with aperiodic CSI-RS resources is configured for fast SCell activation is activated from deactivated, the UE is allowed:

- an interruption on any active serving cell:
 - of up to X2 slot, if the active serving cell and the SCell being activated are in a FR1 band pair or in a FR1+FR2 band pair.
 - of up to X2 slot, if the active serving cell and the SCell being activated are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair.
 - Where X2 is specified in Table 8.2.2.2.2-1.

or

- of up to Y2 slot + $T_{\text{ATRS_duration}}$, if the active serving cells are in the same band as any of the SCells being activated, when
 - SCell to be activated is known and belongs to FR1, if the measurement period of the SCell being activated is larger than 2400ms, or
 - SCell is unknown and belongs to FR1, and SCell is contiguous to an active serving cell in the same band

or

- of up to Y2 slot if the active serving cells are in the same band as any of the SCells being activated, when
 - SCell to be activated is known and belongs to FR1, if the measurement period of the SCell being activated is equal to or smaller than 2400ms, or
- SCell to be activated belongs to FR2

Where:

- $T_{\text{ATRS_duration}}$ is CSI-RS burst for SCell activation where the CSI-RS burst is defined as four CSI-RS resources in two consecutive slots on the being activated SCell.
- Y2 are specified in Table 8.2.1.2.4-2.

8.2.2.2.18 Interruptions due to PUCCH SCell activation/deactivation

When one SCell configured with PUCCH is activated or deactivated,

- The UE is allowed an interruption on active serving cell as defined in clause 8.2.2.2.2.
- The starting time of interruption shall be within the delay as defined in clause 8.3.12.
- For inter-band CA, if the UE is not capable of *parallelTxPRACH-SRS-PUCCH-PUSCH*, additional interruption is allowed on SRS/PUCCH/PUSCH of active serving cells when colliding with RACH transmission on PUCCH SCell. Interruption occurs on the symbols containing SRS/PUCCH/PUSCH, which overlap with the duration of the PRACH preamble [3] transmitted on the PUCCH SCell.

8.2.3 NE-DC Interruptions

8.2.3.1 Introduction

This clause contains the requirements related to the interruptions on PCell and SCell, when

- E-UTRA PSCell transitions between active and non-active during DRX, or
- E-UTRA PSCell transitions from non-DRX to DRX, or
- E-UTRA PSCell/SCell in SCG or SCell in MCG is added or released, or
- E-UTRA PSCell/SCell in SCG or SCell(s) in MCG is activated or deactivated, or
- measurements on SCC with deactivated SCell in either E-UTRA SCG or NR MCG or
- PUSCH/PUCCH carrier configuration and deconfiguration in NR MCG, or
- UL/DL BWP is switched on PCell or SCell in MCG, or
- UE-specific CBW is changed on PCell or SCell in MCG, or
- CGI reading of an NR neighbour cell with autonomous gaps, or
- CGI reading of an E-UTRA neighbour cell with autonomous gaps.
- NR SRS carrier based switching, or
- E-UTRA SRS carrier based switching, or
- NR SRS antenna port switching.
- SCell in NR MCG is activated based on aperiodic CSI-RS.

The requirements shall apply for NE-DC with an NR PCell.

This clause contains interruptions where victim cell is PCell or SCell belonging to MCG. Requirements for interruptions requirements when the victim cell is E-UTRA PSCell or E-UTRA SCell belonging to SCG are specified in TS 36.133 [15].

For a UE which does not support per-FR measurement gap, interruptions to the PCell, E-UTRA PSCell or activated MCG SCells may be caused by EUTRA PSCell, EUTRA SCells or SCells on any frequency range. For UE which support per-FR gap, interruptions to the PCell, E-UTRA PSCell or activated MCG SCells may be caused by EUTRA PSCell, EUTRA SCells or SCells on the same frequency range as the victim cell.

8.2.3.2 Requirements

8.2.3.2.1 Interruptions at transitions between active and non-active during DRX

Interruption on PCell and the activated SCell if configured due to E-UTRA PSCell transitions between active and non-active during DRX when PCell or SCell is in non-DRX are allowed with up to 1% probability of missed ACK/NACK when the configured E-UTRA PSCell DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured E-UTRA PCell DRX cycle is 640 ms or longer. Each interruption shall not exceed X slot as defined in table 8.2.3.2.1-1.

Table 8.2.3.2.1-1: Interruption length X at transition between active and non-active during DRX

μ	NR slot length (ms)	Interruption length X (slots)	
		Sync	Async
0	1	1	2
1	0.5	1	2
2	0.25	3	
3	0.125	5	

When both PCell and E-UTRA PSCell are in DRX, no interruption is allowed.

8.2.3.2.2 Interruptions at transitions from non-DRX to DRX

Interruption on PCell and the activated SCell if configured due to E-UTRA PSCell transitions from non-DRX to DRX when PCell or SCell is in non-DRX shall not exceed X slots as defined in table 8.2.3.2.1-1.

8.2.3.2.3 Interruptions at PSCell/SCell addition/release

The requirements in this clause shall apply for the UE configured with E-UTRA PSCell.

When one E-UTRA PSCell/SCell in SCG is added or released:

- the UE is allowed an interruption on any active serving cell in MCG:
 - of up to X1 slots, if the active serving cell is not in the same band as any of the E-UTRA PSCell/SCells being added or released, or
 - of up to $\max\{Y1 \text{ slots} + T_{\text{SMTC_duration}}, 5\text{ms}\}$ if the active serving cells are in the same band as any of the E-UTRA PSCell/SCells being added or released, provided the cell specific reference signals from the active serving cells and the E-UTRA PSCell/SCells being added or released are available in the same slot, where $T_{\text{SMTC_duration}}$ is the longest SMTC duration among all above activated serving cells in MCG;

Where X1 and Y1 are specified in Table 8.2.3.2.3-1.

When one SCell in MCG is added or released:

- the UE is allowed an interruption on any activated serving cell in MCG:
 - of up to X1 slots, if the active serving cell and the SCell being added or released are in a FR1 band pair or in a FR1+FR2 band pair.
 - of up to X1 slot, if the active serving cell and the SCell being added or released are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair.

or

- of up to $Y1 \text{ slots} + T_{\text{SMTC_duration}}$ if the active serving cells are in the same band as any of the SCells being added or released, provided the cell specific reference signals from the active serving cells and the SCells being added or released are available in the same slot, where, $T_{\text{SMTC_duration}}$ is
 - the longest SMTC duration among all above active serving cells in MCG and the SCell being added when one SCell is added. If SSB configuration (*absoluteFrequencySSB*) but no SMTC configuration is

provided for the SCell being added, the SSB transmission periodicity is assumed to be 5ms and $T_{\text{SMTC duration}}$ for the SCell being added is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being added. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being added, $T_{\text{SMTC duration}}$ for the SCell being added is 0ms;

- the longest SMTC duration among all above active serving cells in MCG when one SCell is released.

Where X1 and Y1 are specified in Table 8.2.3.2.3-2.

Table 8.2.3.2.3-1: Interruption length X1 and Y1 at E-UTRA PSCell/SCell addition/release

μ	NR Slot length (ms)	Interruption length X1 (slots)		Interruption length Y1 (slots)	
		Sync	Async	Sync	Async
0	1	1	2	1	2
1	0.5	2	3	2	3
2	0.25	5		4	5
3	0.125	9		N/A	N/A

Table 8.2.3.2.3-2: Interruption length X1 and Y1 at SCell addition/Release

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)		Interruption length Y1 (slots)
0	1	1		1
1	0.5	2		2
2	0.25	Both aggressor cell and victim cell are on FR2	4	4
		Either aggressor cell or victim cell is on FR1	5	
3	0.125	Aggressor cell is on FR2	8	8
		Aggressor cell is on FR1	9	

8.2.3.2.4 Interruptions at SCell activation/deactivation

The requirements in this clause shall apply for the UE configured with E-UTRA PSCell and one SCell.

When one E-UTRA SCell in SCG is activated from deactivated or dormant state, or deactivated from activated or dormant state:

- the UE is allowed an interruption on any active serving cell in MCG:
- of up to X2 slots, if the active serving cell is not in the same band as any of the SCells being activated or deactivated, or
- of up to $\max\{Y2 \text{ slots} + T_{\text{SMTC duration}}, 5\text{ms}\}$ if the active serving cells are in the same band as any of the E-UTRA SCells being activated or deactivated, provided the cell specific reference signals from the active serving cells and the E-UTRA SCells being activated or deactivated are available in the same slot, where $T_{\text{SMTC duration}}$ is the longest SMTC duration among all above active serving cells in MCG.

Where X2 and Y2 are specified in Table 8.2.3.2.4-1.

When one SCell in MCG is activated or deactivated:

- the UE is allowed an interruption on any serving cell in MCG:
- of up to X2 slots, if the active serving cell is not in the same band as any of the SCells being activated or deactivated, or

- of up to Y2 slots + $T_{\text{SMTC_duration}}$ if the active serving cells are in the same band as any of the SCells being activated or deactivated, provided the cell specific reference signals from the active serving cells and the SCells being activated or deactivated are available in the same slot, where, $T_{\text{SMTC_duration}}$ is
 - the longest SMTC duration among all above active serving cells in MCG and the SCell being activated when one SCell is activated, If SSB configuration (*absoluteFrequencySSB*) but no SMTC configuration is provided for the SCell being activated, the SSB transmission periodicity is assumed to be 5ms and $T_{\text{SMTC_duration}}$ for the SCell being activated is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being activated. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being activated, $T_{\text{SMTC_duration}}$ for the SCell being activated is 0ms;
 - the longest SMTC duration among all above active serving cells in MCG when one SCell is deactivated.

Where X2 and Y2 are specified in Table 8.2.3.2.4-2.

Table 8.2.3.2.4-1: Interruption length X2 and Y2 at E-UTRA SCell activation/deactivation

μ	NR Slot length (ms)	Interruption length X2 (slots)		Interruption length Y2 (slots)	
		Sync	Async	Sync	Async
0	1	1	2	1	2
1	0.5	1	2	1	2
2	0.25	3		2	3
3	0.125	5		N/A	N/A

Table 8.2.3.2.4-2: Interruption length X2 and Y2 at SCell activation/deactivation

μ	NR Slot length (ms) of victim cell	Interruption length X2 (slots)		Interruption length Y2 (slots)
0	1	1		1
1	0.5	1		1
2	0.25	Both aggressor cell and victim cell are on FR2	2	2
		Either aggressor cell or victim cell is on FR1	3	
3	0.125	Aggressor cell is on FR2	4	4
		Aggressor cell is on FR1	5	

8.2.3.2.5 Interruptions during measurements on SCC

8.2.3.2.5.1 Interruptions during measurements on deactivated NR SCC

Interruption on PCell and other activated SCell(s) during measurement on the deactivated NR SCC shall meet requirements in clause 8.2.2.2.3.

8.2.3.2.5.2 Interruptions during measurements on deactivated E-UTRAN SCC

When one E-UTRA SCell in SCG is deactivated, the UE is allowed due to measurements on the E-UTRA SCC with the deactivated E-UTRA SCell:

- an interruption on PCell or any activated SCell with up to 0.5% probability of missed ACK/NACK when any of the configured *measCycleSCell* [15] for the deactivated E-UTRA SCells is 640 ms or longer.
- an interruption on PCell or any activated SCell with up to 0.5% probability of missed ACK/NACK regardless of the configured *measCycleSCell* [15] for the deactivated E-UTRA SCells if indicated by the network using IE *allowInterruptions* [15].

Each interruption shall not exceed

- X3 slots, if the PCell or activated SCell is not in the same band as the E-UTRA deactivated SCC being measured, or
- Y3 slots + SMTC duration, if the PCell or activated SCell is in the same band as the E-UTRA deactivated SCC being measured, provided the cell specific reference signals from the PCell or activated SCell and the E-UTRA deactivated SCC being measured are available in the same slot.

Where X3 and Y3 are specified in Table 8.2.3.2.5-1

Table 8.2.3.2.5-1: Interruption length X3 and Y3 at measurements on deactivated E-UTRA SCC

μ	NR Slot length (ms)	Interruption length X3 (slots)		Interruption length Y3 (slot)	
		Sync	Async	Sync	Async
0	1	1	2	1	2
1	0.5	1	2	1	2
2	0.25	3		2	3
3	0.125	5		N/A	N/A

8.2.3.2.5.3 Interruptions during CQI measurements on dormant E-UTRAN SCC

When one E-UTRA SCell in SCG is dormant, the UE is allowed due to CQI measurements on the dormant E-UTRA SCell:

- an interruption on PCell or any activated SCell with up to 0.5% probability of missed ACK/NACK.

Each interruption shall not exceed

- X3 slots, if the PCell or activated SCell is not in the same band as the E-UTRA dormant SCell being measured, or
- Y3 slots + SMTC duration, if the PCell or activated SCell is in the same band as the E-UTRA dormant SCell being measured, provided the cell specific reference signals from the PCell or activated SCell and the E-UTRA dormant SCell being measured are available in the same slot.

Where X3 and Y3 are defined in Table 8.2.3.2.5.2-1.

8.2.3.2.5.4 Interruptions during RRM measurements on dormant E-UTRAN SCC

When one E-UTRA SCell in SCG is dormant, the UE is allowed due to RRM measurements on the E-UTRA SCC with the dormant E-UTRA SCell:

- an interruption on PCell or any activated SCell with up to 0.5% probability of missed ACK/NACK.

Each interruption shall not exceed

- X3 slots, if the PCell or activated SCell is not in the same band as the E-UTRA dormant SCC being measured, or
- Y3 slots + SMTC duration, if the PCell or activated SCell is in the same band as the E-UTRA dormant SCC being measured, provided the cell specific reference signals from the PCell or activated SCell and the E-UTRA dormant SCC being measured are available in the same slot.

Where X3 and Y3 are defined in Table 8.2.3.2.5.2-1.

8.2.3.2.6 Interruptions at UL carrier RRC reconfiguration

The requirements in this clause shall apply when a supplementary UL carrier or an UL carrier is configured or de-configured in NE-DC.

When an UL carrier or supplementary UL carrier is configured or deconfigured, an interruption of up to X4 slot as specified in Table 8.2.3.2.6-1, is allowed during the RRC reconfiguration procedure in TS 38.331 [2] on PCell, all

activated SCells within the same FR as the reconfigured uplink carrier. The interruption is for both uplink and downlink of PCell, all activated E-UTRA SCells, E-UTRA PSCell and all activated SCells within the same FR as the configured or de-configured UL.

Table 8.2.3.2.6-1: Interruption length X4 at UL carrier RRC reconfiguration

μ	NR Slot length (ms)	Interruption length X4 (slots)	
		Sync	Async
0	1	1	2
1	0.5	2	3
2	0.25	5	
3	0.125	9	

8.2.3.2.7 Interruptions due to Active BWP switching Requirement

The requirements for DCI-based BWP switch, timer-based BWP switch or UL BWP switch triggered by consistent uplink CCA failures in this clause apply to the case that the BWP switch is performed on a single CC or multiple CCs.

When either of the DCI-based, timer-based or RRC-based downlink BWP switch and/or uplink BWP switch occur on multiple CCs simultaneously or over partially overlapping period, the interruption requirements described in this clause apply for each BWP switch.

When UE receives a DCI indicating the UE to switch its active BWP, or when a BWP timer *bwp-InactivityTimer* defined in TS 38.331 [2] expires, or when the UE receives an RRC command indicating the UE to switch its active BWP or when UL BWP switch is triggered by consistent uplink CCA failures, the UE is allowed an interruption on PCell and any activated SCells as defined in clause 8.2.2.2.5.

8.2.3.2.8 Interruptions at direct SCell activation and hibernation

8.2.3.2.8.1 Interruptions during direct SCell activation and hibernation of E-UTRA SCell

When one E-UTRA SCell in SCG is directly activated and hibernated:

- the UE is allowed an interruption on any active serving cell in MCG:
- of up to X1 slot, if the active serving cell is not in the same band as any of the E-UTRA SCells being directly activated or hibernated, or
- of up to $\max\{Y1 \text{ slot} + T_{\text{SMTC_duration}}, 5\text{ms}\}$ if the active serving cells are in the same band as any of the E-UTRA SCells being directly activated or hibernated, provided the cell specific reference signals from the active serving cells and the E-UTRA SCells being directly activated or hibernated are available in the same slot, where $T_{\text{SMTC_duration}}$ is the longest SMTC duration among all above active serving cells in MCG.

Where X1 and Y1 are specified in Table 8.2.3.2.3-1.

8.2.3.2.8.2 Interruptions during direct SCell activation

When one or multiple SCell(s) in MCG are directly activated at SCell addition:

- the UE is allowed an interruption on any active serving cell in MCG:
- of up to X1 slot, if the active serving cell is not in the same band as the SCell being directly activated, or
- of up to $\max\{Y1 \text{ slot} + T_{\text{SMTC_duration}}, 5\text{ms}\}$ if the active serving cells are in the same band as the SCell being directly activated, provided the cell specific reference signals from the active serving cells and the SCell being directly activated are available in the same slot, where $T_{\text{SMTC_duration}}$ is the longest SMTC duration among all above active serving cells in MCG.

Where X1 and Y1 are specified in Table 8.2.3.2.3-2.

8.2.3.2.9 Interruptions at SCell hibernation

When one E-UTRA SCell in SCG is hibernated:

- the UE is allowed an interruption on any active serving cell in MCG:
- of up to X2 slot, if the active serving cell is not in the same band as any of the E-UTRA SCells being hibernated, or
- of up to $\max\{Y2 \text{ slot} + T_{\text{SMTC_duration}}, 5\text{ms}\}$ if the active serving cells are in the same band as any of the E-UTRA SCells being hibernated, provided the cell specific reference signals from the active serving cells and the E-UTRA SCells being hibernated are available in the same slot, where $T_{\text{SMTC_duration}}$ is the longest SMTC duration among all above active serving cells in MCG.

Where X2 and Y2 are specified in Table 8.2.3.2.4-1.

8.2.3.2.10 Interruptions at SCell activation/deactivation with multiple downlink SCells

The requirements in this clause shall apply for the UE configured with E-UTRA PCell and up to 6 downlink SCell(s).

When multiple SCells in MCG are activated or deactivated by one single MAC CE command:

- an interruption on any serving cell in MCG is specified as in clause 8.2.3.2.4.

8.2.3.2.11 Interruptions at NR SRS carrier based switching

SRS transmission can be configured on a carrier not configured for PUCCH/PUSCH transmission. When a UE needs to transmit periodic, semi-persistent or aperiodic SRS on a carrier of a serving cell not configured for PUCCH/PUSCH transmission, the UE can perform carrier based switching to one or more carriers not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission or from a carrier not configured for PUCCH/PUSCH transmission prior to transmitting SRS, provided that:

- switching is from a configured carrier to another activated carrier;
- the carrier of SCells not configured for PUCCH/PUSCH transmission to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission, or indicated by MAC-CE for semi-persistent SRS transmission, or configured via RRC for periodic SRS transmission;
- the serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by srs-SwitchFromServCellIndex and srs-SwitchFromCarrier in TS38.331 [2];
- the SRS switching is not colliding with any other transmission with higher priority defined in TS 38.214 [26].
- the SRS switching is not colliding with any SSB/CSI-RS based L3 measurements and the measurements for RLM/BFD in MCG.- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 38.331 [2], and is compliant to the requirements for inter-band CA with uplink in one NR band and without simultaneous Rx/Tx specified in TS 38.101-3 [20], the SRS transmission are not simultaneously scheduled with DL SSB/CSI-RS for L3 or L1 measurements transmission on other carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in MCG if UE is not capable of Per-FR gap, or on active serving cell(s) in MCG in FR1 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 8.2.3.2.11-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in MCG if UE is not capable of Per-FR gap, or on active serving cell(s) in MCG in FR2 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 8.2.3.2.11-2.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in MCG if UE is not capable of Per-FR gap, or on active serving cell(s) in MCG in FR1 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 8.2.3.2.11-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell in MCG if UE is not capable of Per-FR gap, or on active serving cell(s) in MCG in FR2 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 8.2.3.2.11-2.

Table 8.2.3.2.11-1: Interruption length X1 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us) ^{Note 1}	Interruption length X1 (slots)	
			Sub carrier spacing for aggressor cell (kHz)	
			15	30
0	1	≤ 200	2	2
		300, 500	2	2
		900	3	3
1	0.5	≤ 200	3	2
		300, 500	3	3
		900	4	4
2	0.25	≤ 200	4	3
		300, 500	5	4
		900	7	6
3	0.125	≤ 200	7	5
		300, 500	9	7
		900	12	10
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter <i>SRS-SwitchingTimeNR</i> .				

Table 8.2.3.2.11-2: Interruption length X2 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us) ^{Note 1}	Interruption length X2 (slots)	
			Sub carrier spacing for aggressor cell (kHz)	
			60	120
0	1	≤ 200	2	2
1	0.5	≤ 200	2	2
2	0.25	≤ 200	3	3
3	0.125	≤ 200	4	4
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter <i>SRS-SwitchingTimeNR</i> .				

For intra-band SRS carrier switching in FR1 or FR2, interruptions in Table 8.2.3.2.11-1 and in Table 8.2.3.2.11-2 based on SRS carrier switching time $\leq 200\mu\text{s}$ shall apply. For inter-band SRS carrier switching in FR1, interruptions in Table 8.2.3.2.11-1 and in Table 8.2.3.2.11-2 shall apply.

8.2.3.2.12 Interruptions at E-UTRA SRS carrier based switching

A PUSCH-less carrier of E-UTRA SCell is a TDD carrier without PUCCH/PUSCH configured. When a UE needs to transmit periodic or aperiodic SRS [23] and/or non-contention based PRACH on a PUSCH-less E-UTRA carrier of SCell, the UE can perform carrier based switching to one or more PUSCH-less carrier of E-UTRA SCells from a E-UTRA carrier with PUSCH or from another PUSCH-less E-UTRA carrier of SCell prior to transmitting SRS and/or PRACH, provided that:

- switching is from a configured E-UTRA carrier to another activated TDD carrier;

- the PUSCH-less carrier of E-UTRA SCells to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission or configured via RRC [15] for periodic SRS transmission;
- the E-UTRA serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by srs-SwitchFromServCellIndex [15];
- the SRS switching is not colliding with any other transmission with higher priority defined in TS36.213 [TBD];
- the SRS switching is not colliding with PDCCH in subframe 0 and 5 as specified in TS36.213 [TBD];
- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 36.331 [2], and is compliant to the requirements for inter-band CA with uplink in one E-UTRA band and without simultaneous Rx/Tx specified in TS 36.101 [25], the SRS or RACH transmission are not simultaneously scheduled with DL subframe #0 or DL subframe #5 on other E-UTRA carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between E-UTRA carriers, the UE is allowed interruptions on any active serving cell in MCG if UE is not capable of Per-FR gap, or on active serving cell(s) in MCG in FR1 if UE is capable of Per-FR gap, during the switching to the PUSCH-less carrier of a serving cell,

- with up to X2 slot as specified in Table 8.2.3.2.12-1.

When SRS carrier based switching is performed between E-UTRA carriers, the UE is allowed interruptions on any active serving cell in MCG if UE is not capable of Per-FR gap, or on active serving cell(s) in MCG in FR1 if UE is capable of Per-FR gap, during the switching from the PUSCH-less carrier of a serving cell,

- with up to X2 slot as specified in Table 8.2.3.2.12-1

Table 8.2.3.2.12-1: Interruption length X2 (slot)

μ	NR Slot length (ms)	Interruption length X2 (slots)
0	1	2
1	0.5	3
2	0.25	5
3	0.125	9

8.2.3.2.13 Interruptions due to SCell dormancy

8.2.3.2.13.1 Interruptions due to SCell dormancy switch

When one SCell in MCG is switched from dormancy to non-dormancy or from non-dormancy to dormancy [7] when UE is in DRX active time,

- the UE is allowed an interruption on active serving cell in MCG as defined in clause 8.2.3.2.7, except that the interruption is allowed regardless of which parameters change between the dormant BWP and the non-dormant BWP
- The starting time of interruption shall be within the dormancy switching delay as defined in clause 8.6.2.

When multiple SCells in MCG are switched from dormancy to non-dormancy or vice versa when the UE is in DRX active time, the interruption requirement described above applies for each BWP switch.

8.2.3.2.13.2 Interruptions due to CQI measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of CQI measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from CQI measurements on dormant SCells shall not exceed 0.5%.

8.2.3.2.13.3 Interruptions due to RRM measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of RRM measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from RRM measurements on dormant SCells shall not exceed 1.0%.

8.2.3.2.14 Interruptions when identifying CGI of an NR cell with autonomous gaps

When a UE is identifying CGI of an NR cell with autonomous gaps, the UE is allowed interruptions on PCell or any activated SCell:

- with up to K1 interruptions with interrupted slots up to interruption length X1 specified in Table 8.2.3.2.14-1 for each interruption during MIB decoding time period T_{MIB} (ms) specified in clause 9.11.
- with up to L1 interruptions with interrupted slots up to interruption length Y1 specified in Table 8.2.3.2.14-1 for each interruption during SIB1 decoding time period T_{SIB1} (ms) specified in clause 9.11 for SSB and CORESET for RMSI scheduling multiplexing patterns 1.
- with up to L2 interruptions with interrupted slots up to interruption length Y2 specified in Table 8.2.3.2.14-1 for each interruption during SIB1 decoding time period T_{SIB} Where:
- $K1 = 6$ for the target cell carrier frequency on FR1 and $K1 = 25$ for the target cell carrier frequency on FR2, and
- $L1 = T_{SIB1}/20$, and
- $L2 = T_{SIB1}/T_{SMTC}$, where T_{SMTC} is the periodicity of the SMTC occasion configured for the target cell carrier.

Table 8.2.3.2.14-1: Interruption length X1, Y1 and Y2 during measurements with autonomous gaps

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)	Interruption length Y1 (slots)	Interruption length Y2 (slots)
0	1	6	7	6
1	0.5	12	13	10
2	0.25	24	25	19
3	0.125	48	49	37

8.2.3.2.15 Interruptions when identifying CGI of an E-UTRA cell with autonomous gaps

When a UE is identifying CGI of an E-UTRA FDD cell or E-UTRA TDD cell with autonomous gaps, within time period

- $T_{\text{identify_CGI, intra}}$ specified in clause 8.1.2.2.3, or clause 8.1.2.2.4 in TS 36.133 [15], or
- $T_{\text{identify_CGI, inter}}$ specified in clause 8.1.2.3.5, or clause 8.1.2.3.6, or clause 8.1.2.3.7, or clause 8.1.2.3.6 in TS 36.133 [15], or
- $T_{\text{identify_CGI, E-UTRA}}$ specified in clause 9.4.7.1

the UE shall be able to transmit at least the number of ACK/NACKs specified in Table 8.2.3.2.15-1 on PCell or any activated SCell in the frequency range where autonomous gaps are used, provided that:

- there is continuous DL data allocation,
- no DRX cycle is used,
- no measurement gaps are configured,
- only one code word is transmitted in each slot,
- 2 slot ACK/NACK feedback is configured,
- 20 ms SMTC period is configured.

Table 8.2.3.2.15-1: Minimum number of ACK/NACKs transmitted by the UE

Minimum number of transmitted ACK/NACKs	Configuration of the serving cell in which the transmitted ACK/NACKs are counted	
	Duplex mode configuration	SCS
84	FDD	15 kHz
193	FDD	30 kHz
402	FDD	60 kHz
28	TDD ^{Note 1}	15 kHz
81	TDD ^{Note 1}	30 kHz
159	TDD ^{Note 1}	60 kHz
233	TDD ^{Note 2}	60 kHz
491	TDD ^{Note 2}	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18].		
NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

8.2.3.2.16 Interruptions at NR SRS antenna port switching

The requirements in this clause are applicable to SRS antenna port switching on FR1 and SRS resource(s) is only configured within the last 6 symbols of a slot. For interruption caused by SRS antenna port switching, the victim cell is based on the entry number of the band indicated by *txSwitchImpactToRx* and/or *txSwitchWithAnotherBand* regardless of per-FR MG capability. An UL interruption is allowed on any of the serving cells as indicated in *txSwitchWithAnotherBand*, and a DL interruption is allowed on any of the serving cells as indicated in *txSwitchImpactToRx*.

The UE shall perform SRS antenna port switching only if the below conditions are met.

- the SRS switching is not colliding with any other UL transmission with higher priority defined in TS 38.214 [26] if the serving cell on which the higher priority transmission is performed is a victim cell based on *txSwitchWithAnotherBand* or is the same carrier on which SRS is transmitted.
- the SRS switching is not colliding with any NR measurements (i.e. SSB/CSI-RS based L1/L3 measurements) and the measurements for RLM/BFD/CBD if the serving cell on which the NR measurements and the measurements for RLM/BFD/CBD is performed is a victim cell based on *txSwitchImpactToRx* or is the same carrier on which SRS is transmitted.

No requirements are defined for SRS antenna port switching if aperiodic SRS switching is colliding with aperiodic L1-RSRP/L1-SINR measurements and the serving cell on which the aperiodic L1-RSRP/L1-SINR measurement is configured is indicated in *txSwitchImpactToRx* or is the same carrier on which aperiodic SRS is scheduled/configured.

No requirements apply when SRS antenna port switching is colliding with E-UTRA measurement if the carrier on which the E-UTRA measurement is performed is indicated in *txSwitchImpactToRx* or is the same carrier on which SRS is scheduled/configured.

When 1 SRS symbol is configured in a slot for SRS antenna switching and the aggressor and victim cells are synchronized, the interruption requirement in Table 8.2.3.2.16-1 applies. When 1 SRS symbol is configured in a slot for SRS antenna switching and the aggressor and victim cells are asynchronous, the interruption requirement in Table 8.2.3.2.16-2 applies. For the rest of SRS configurations, the interruption requirement in Table 8.2.3.2.16-3 applies.

Table 8.2.3.2.16-1: Interruption length in symbols of victim CC when 1 SRS symbol is configured, and aggressor and victim cells are synchronized

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	3	2	2
30	4	3	3
60	8	6	5
120	14	10	8

Table 8.2.3.2.16-2: Interruption length in slots of victim CC when 1 SRS symbol is configured, and aggressor and victim cells are asynchronized

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	2	2	2
30	2	2	2
60	2	2	2
120	2	2	2

Table 8.2.3.2.16-3: Interruption length in slots of victim CC for rest of the SRS configurations for synchronised and asynchronized scenarios

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	2	2	2
30	2	2	2
60	3	2	2
120	5	3	3

8.2.3.2.17 Interruptions at fast SCell activation

The requirements in this clause shall apply for the UE configured with E-UTRA PSCell and one SCell in MCG when aperiodic CSI-RS resources is configured for fast SCell activation.

When one SCell in MCG configured with aperiodic CSI-RS resources is configured for fast SCell activation is activated from deactivated, the UE is allowed:

- the UE is allowed an interruption on any serving cell in MCG:
 - of up to X2 slots, if the active serving cell is not in the same band as any of the SCells being activated, or
 - of up to Y2 slots + $T_{\text{ATRS_duration}}$ if the active serving cells are in the same band as any of the SCells being activated, when
 - SCell to be activated is known and belongs to FR1, if the measurement period of the SCell being activated is larger than 2400ms, or
 - SCell is unknown and belongs to FR1, and SCell is contiguous to an active serving cell in the same band
 - of up to Y2 slot if the active serving cells are in the same band as any of the SCells being activated, when
 - SCell to be activated is known and belongs to FR1, if the measurement period of the SCell being activated is equal to or smaller than 2400ms, or
- SCell to be activated belongs to FR2

Where

- $T_{\text{ATRS_duration}}$ is CSI-RS burst for SCell activation where the CSI-RS burst is defined as four CSI-RS resources in two consecutive slots on the being activated SCell.
- X2 and Y2 are specified in Table 8.2.3.2.4-2.

8.2.3.2.18 Interruptions due to UE-specific CBW change

The requirements in clause 8.2.1.2.11 apply for this clause.

8.2.3.2.19 Interruptions due to PUCCH SCell activation/deactivation

When one SCell in MCG configured with PUCCH is activated or deactivated,

The UE is allowed an interruption on active serving cell in MCG as defined in clause 8.2.3.2.4.

- The starting time of interruption shall be within the delay as defined in clause 8.3.12.
- For inter-band CA, if the UE is not capable of *parallelTxPRACH-SRS-PUCCH-PUSCH*, additional interruption is allowed on SRS/PUCCH/PUSCH of active serving cells when colliding with RACH transmission on PUCCH SCell. Interruption occurs on the symbols containing SRS/PUCCH/PUSCH, which overlap with the duration of the PRACH preamble [3] transmitted on the PUCCH SCell.

8.2.4 NR-DC: Interruptions

8.2.4.1 Introduction

This clause contains the requirements related to the interruptions on PCell, PSCell and activated SCell if configured, when

up to 1 SCell in FR1 and up to 7 SCell(s) in FR2 are configured, deconfigured, activated or deactivated or,
a supplementary UL carrier or an UL carrier is configured or de-configured, or
measurements on SCC with deactivated SCell in NR SCG, or
measurements on the deactivated PSCell in NR SCG, or
UL/DL BWP is switched on PCell, PSCell or SCell,
UE-specific CBW is changed on PCell, PSCell or SCell, or
transitions between active and non-active during DRX, or
transitions from non-DRX to DRX, or
CGI reading of an NR neighbour cell with autonomous gaps, or
CGI reading of an E-UTRA neighbour cell with autonomous gaps.
NR SRS carrier based switching, or
NR SRS antenna port switching.
RLM/BFD Measurement on deactivated NR PSCell, or
NR SCell is activated based on aperiodic CSI-RS.

Note: interruptions at SCell addition/release, activation/deactivation and during measurements on SCC may not be required by all UEs.

The interruptions shall not interrupt RRC signalling or ACK/NACKs related to RRC reconfiguration procedure [2] for SCell addition/release or MAC control signalling [17] for SCell activation/deactivation command.

The requirements shall apply for NR-DC with an NR PCell, PSCell or SCell.

For a UE which does not support per-FR measurement gap, interruptions to the PCell and activated SCell may be caused by SCells on any frequency range. For a UE which supports per-FR gaps, interruptions to PCell, PSCell and activated SCell may be caused by SCells on the same frequency range as the victim cell.

8.2.4.2 Requirements

8.2.4.2.1 Interruptions at PSCell/SCell addition/release

When PSCell or one or more SCells is added or released using the same *RRCConnectionReconfiguration* message as defined in TS 38.331 [2], the UE is allowed an interruption on any activated serving cell during the RRC reconfiguration procedure as follows:

- an interruption on any active serving cell:
- of up to the duration shown in table 8.2.4.2.1-1, if the active serving cell is not in the same band as the PSCell or SCell being added or released, where the requirements for Sync apply for synchronous NR-DC, and for asynchronous NR-DC if the active serving cell is in the same CG as the PSCell or SCell being added or released, and the requirements for Async apply for asynchronous NR-DC if the active serving cell is not in the same CG as the PSCell or SCell being added or released, or
- of up to the duration shown in table 8.2.4.2.1-2, if the active serving cells are in the same band as the SCell being added or released, provided the cell specific reference signals from the active serving cells and the SCell being added or released are available in the same slot.

Table 8.2.4.2.1-1: Interruption duration for PSCell/SCell addition/release for inter-band DC/CA

μ	NR Slot length (ms) of victim cell	Interruption length (slots)		
		Sync		Async
0	1	1		2
1	0.5	2		3
2	0.25	Both aggressor cell and victim cell are on FR2	4	5
		Either aggressor cell or victim cell is on FR1	5	
3	0.125	Aggressor cell is on FR2	8	9
		Aggressor cell is on FR1	9	
5	0.03125	Aggressor cell is on FR1	33	33
6	0.015625	Aggressor cell is on FR1	65	65

Table 8.2.4.2.1-2: Interruption duration for SCell addition/release for intra-band DC/CA

μ	NR Slot length (ms)	Interruption length (slots)
0	1	$1 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
1	0.5	$2 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
2	0.25	$4 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
3	0.125	$8 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
5	0.03125	$32 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
6	0.015625	$64 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe}, \mu}$
NOTE 1: $T_{\text{SMTC_duration}}$ measured in subframes is - the longest SMTC duration among all above activeserving cells and the SCell being added when one SCell is added. If SSB configuration (<i>absoluteFrequencySSB</i>) but no SMTC configuration is provided for the SCell being added, the SSB transmission		

periodicity is assumed to be 5ms and $T_{\text{SMTC_duration}}$ for the SCell being added is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being added. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being added, $T_{\text{SMTC_duration}}$ for the SCell being added is 0ms;
 - the longest SMTC duration among all active serving cells in the same band when one SCell is released.

NOTE 2: $N_{\text{slot}}^{\text{subframe},\mu}$ is as defined in TS 38.211 [6].

8.2.4.2.2 Interruptions at SCell activation/deactivation

When a SCell is activated or deactivated as defined in TS 37.340 [17], the UE is allowed

- an interruption on any active serving cell:
- of up to the duration shown in table 8.2.4.2.2-1, if the active serving cell is not in the same band as any of the SCells being activated or deactivated, where the requirements for Sync apply for synchronous NR-DC, and for asynchronous NR-DC if the active serving cell is in the same CG as all the SCells being activated, and the requirements for Async apply for asynchronous NR-DC if the active serving cell is not in the same CG as any of the SCells being activated, or
- of up to the duration shown in table 8.2.4.2.2-2, if the active serving cells are in the same band as any of the SCells being activated or deactivated provided the cell specific reference signals from the active serving cells and the SCells being activated or deactivated are available in the same slot.

Table 8.2.4.2.2-1: Interruption duration for SCell activation/deactivation for inter-band DC/CA

μ	NR Slot length (ms) of victim cell	Interruption length (slots)	
		Sync	Async
0	1	1	2
1	0.5	1	2
2	0.25	Both aggressor cell and victim cell are on FR2	3
		Either aggressor cell or victim cell is on FR1	
3	0.125	Aggressor cell is on FR2	5
		Aggressor cell is on FR1	
5	0.03125	Aggressor cell is on FR1	17
6	0.015625	Aggressor cell is on FR1	33

Table 8.2.4.2.2-2: Interruption duration for SCell activation/deactivation for intra-band DC/CA

μ	NR Slot length (ms)	Interruption length (slots)
0	1	$1 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe},\mu}$
1	0.5	$1 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe},\mu}$
2	0.25	$2 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe},\mu}$
3	0.125	$4 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe},\mu}$
5	0.03125	$16 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe},\mu}$
6	0.015625	$32 + T_{\text{SMTC_duration}} * N_{\text{slot}}^{\text{subframe},\mu}$
NOTE 1: $T_{\text{SMTC_duration}}$ measured in subframes is - the longest SMTC duration among all above active serving cells and the SCell being activated when one SCell is activated. If SSB configuration		

(*absoluteFrequencySSB*) but no SMTC configuration is provided for the SCell being activated, the SSB transmission periodicity is assumed to be 5ms and $T_{\text{SMTC duration}}$ for the SCell being activated is x ms, where x = the number of consecutive subframes containing all SSBs in one SSB burst transmitted by the SCell being activated. If no SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration is provided for the SCell being activated, $T_{\text{SMTC duration}}$ for the SCell being activated is 0ms;
 - the longest SMTC duration among all active serving cells in the same band when one SCell is deactivated.

NOTE 2: $N_{\text{slot}}^{\text{subframe}, \mu}$ is as defined in TS 38.211 [6].

8.2.4.2.3 Interruptions during measurements on SCC

Interruption on PCell, PSCell and other activated SCell(s) during measurement on the deactivated NR SCC shall meet requirements in clause 8.2.2.2.3, where the term PCell in clause 8.2.2.2.3 shall be deemed to be replaced with SpCell.

8.2.4.2.4 Interruptions at UL carrier RRC reconfiguration

The requirements in this clause shall apply when a supplementary UL carrier or an UL carrier is configured or de-configured in NR-DC as defined in TS 38.331 [2].

When an UL carrier or supplementary UL carrier is configured or de-configured, an interruption of up to the duration shown in table 8.2.4.2.4-1, is allowed during the RRC reconfiguration procedure in TS38.331 [2] on all the other activated serving cells within the same FR as the reconfigured uplink carrier. The interruption is for both uplink and downlink of all the other serving cells within the same FR as the configured or de-configured UL.

Table 8.2.4.2.4-1: Interruption duration for UL carrier RRC reconfiguration

μ	NR Slot length (ms)	Interruption length (slots)
0	1	1
1	0.5	2
2	0.25	4
3	0.125	8
5	0.03125	32
6	0.015625	64

8.2.4.2.5 Interruptions due to Active BWP switching Requirement

The requirements for DCI-based BWP switch, timer-based BWP switch or UL BWP switch triggered by consistent uplink CCA failures in this clause apply to the case that the BWP switch is performed on a single CC or multiple CCs.

When either of the DCI-based, timer-based or RRC-based downlink BWP switch and/or uplink BWP switch occur on multiple CCs simultaneously or over partially overlapping period, the interruption requirements described in this clause apply for each BWP switch.

When UE receives a DCI indicating the UE to switch its active BWP, or when a BWP timer *bwp-InactivityTimer* defined in TS 38.331 [2] expires, or when the UE receives an RRC command indicating the UE to switch its active BWP or when UL BWP switch is triggered by consistent uplink CCA failures,, the UE is allowed to cause an interruption on any other serving cells as defined in clause 8.2.2.2.5. In addition to what is defined in 8.2.2.5, when RRC-based BWP switch occurs on multiple CCs over partially overlapping period, the interruption is only allowed within the delay $T_{\text{RRCprocessingDelay}} + T_{\text{Waiting}} + T_{\text{BWPswitchDelayRRC}} + D_{\text{RRC}} \cdot (M-1)$ as defined in clause 8.6.3A.3. Besides, in asynchronous scenario the UE is allowed an additional interrupt of 1 slot length.

8.2.4.2.6 Interruptions at transitions between active and non-active during DRX

When PCell is in non-DRX and PSCell is in DRX, interruptions on PCell and the activated SCell in MCG if configured due to transitions from active to non-active and from non-active to active during PSCell DRX are allowed with up to 1% probability of missed ACK/NACK when the configured PSCell DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured PSCell DRX cycle is 640 ms or longer. Each interruption shall not exceed X slot as defined in table 8.2.4.2.6-1.

When PSCell is in non-DRX and PCell is in DRX, interruptions on PSCell on the activated SCell in SCG if configured due to transitions from active to non-active and from non-active to active during PCell DRX are allowed with up to 1 % probability of missed ACK/NACK when the configured PCell DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured PCell DRX cycle is 640 ms or longer. Each interruption shall not exceed X slot as defined in table 8.2.4.2.6-1.

Table 8.2.4.2.6-1: Interruption length X at transition between active and non-active during DRX

μ	NR Slot length (ms)	Interruption length X (slots)	
		Sync	Async
0	1	1	2
1	0.5	1	2
2	0.25	3	
3	0.125	5	
5	0.03125	17	
6	0.015625	33	

When both PCell and PSCell are in DRX, no interruption is allowed.

8.2.4.2.7 Interruptions at transitions from non-DRX to DRX

Interruption on PCell and the activated SCell in MCG if configured due to PSCell transitions from non-DRX to DRX when PCell is in non-DRX shall not exceed X slots as defined in table 8.2.4.2.6-1.

Interruption on PSCell and the activated SCell in SCG if configured due to PCell transitions from non-DRX to DRX when PSCell is in non-DRX shall not exceed X slots as defined in table 8.2.4.2.6-1.

8.2.4.2.8 Interruptions at SCell activation/deactivation with multiple downlink SCells

The requirements in this clause shall apply for the UE configured with NR-DC and up to 1 downlink SCell in FR1 and up to 7 downlink SCell(s) in FR2.

When multiple SCell are activated or deactivated by one single MAC CE command in MCG or SCG:

- an interruption on any serving cell in MCG or SCG is specified as in clause 8.2.4.2.2.

When multiple SCell are activated or deactivated in both MCG and SCG by two MAC CE commands respectively:

- an interruption on any serving cell in MCG is specified as in clause 8.2.4.2.2, and
- an interruption on any serving cell in SCG is specified as in clause 8.2.4.2.2.

8.2.4.2.9 Interruptions at NR SRS carrier based switching

SRS transmission can be configured on a carrier not configured for PUCCH/PUSCH transmission. When a UE needs to transmit periodic, semi-persistent or aperiodic SRS on a carrier of a serving cell not configured for PUCCH/PUSCH transmission, the UE can perform carrier based switching to one or more carriers not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission or from a carrier not configured for PUCCH/PUSCH transmission prior to transmitting SRS, provided that:

- switching is from a configured carrier to another activated carrier;

- the carrier of SCells not configured for PUCCH/PUSCH transmission to which SRS carrier based switching is performed is indicated by DCI SRS request field for aperiodic SRS transmission, or indicated by MAC-CE for semi-persistent SRS transmission, or configured via RRC for periodic SRS transmission;
- the serving cell, from which SRS carrier based switching is performed and whose UL transmission may therefore be interrupted, is indicated by srs-SwitchFromServCellIndex and srs-SwitchFromCarrier in TS38.331 [2];
- the SRS switching is not colliding with any other transmission with higher priority defined in TS 38.214 [26].
- the SRS switching is not colliding with any SSB/CSI-RS based L3 measurements and the measurements for RLM/BFD in the same CG.- for UE, which does not support simultaneous reception and transmission for inter-band TDD CA specified in TS 38.331 [2], and is compliant to the requirements for inter-band CA with uplink in one NR band and without simultaneous Rx/Tx specified in TS 38.101-3 [20], the SRS transmission are not simultaneously scheduled with DL SSB/CSI-RS for L3 or L1 measurements transmission on other carriers.

The UE shall not perform SRS carrier based switching if the above conditions cannot be met.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR1 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 8.2.4.2.9-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR2 if UE is capable of Per-FR gap, during the switching to the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 8.2.4.2.9-2.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR1 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR1 not configured for PUCCH/PUSCH transmission,

- with up to X1 slot as specified in Table 8.2.4.2.9-1.

When SRS carrier based switching is performed between carriers, the UE is allowed interruptions on any active serving cell if UE is not capable of Per-FR gap, or on active serving cell(s) in FR2 if UE is capable of Per-FR gap, during the switching from the carrier of a serving cell in FR2 not configured for PUCCH/PUSCH transmission,

- with up to X2 slot as specified in Table 8.2.4.2.9-2.

Table 8.2.4.2.9-1: Interruption length X1 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us) ^{Note 1}	Interruption length X1 (slots)	
			Sub carrier spacing for aggressor cell (kHz)	
			15	30
0	1	≤ 200	2	2
		300, 500	2	2
		900	3	3
1	0.5	≤ 200	3	2
		300, 500	3	3
		900	4	4
2	0.25	≤ 200	4	3
		300, 500	5	4
		900	7	6
3	0.125	≤ 200	7	5
		300, 500	9	7
		900	12	10
5	0.03125	≤ 200	22	15
		300, 500	31	24
		900	44	37
6	0.015625	≤ 200	42	28
		300, 500	61	47
		900	87	73

Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter <i>SRS-SwitchingTimeNR</i> .
--

Table 8.2.4.2.9-2: Interruption length X2 (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us) ^{Note 1}	Interruption length X2 (slots)			
			Sub carrier spacing for aggressor cell (kHz)			
			60	120	480	960
0	1	≤ 200	2	2	2	2
1	0.5	≤ 200	2	2	2	2
2	0.25	≤ 200	3	3	2	2
3	0.125	≤ 200	4	4	3	3
5	0.03125	≤ 200	11	10	8	8
6	0.015625	≤ 200	21	18	15	15
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter <i>SRS-SwitchingTimeNR</i> .						

For intra-band SRS carrier switching in FR1 or FR2, interruptions in Table 8.2.2.2.9-1 and in Table 8.2.2.2.9-2 based on SRS carrier switching time $\leq 200\mu\text{s}$ shall apply. For inter-band SRS carrier switching in FR1, interruptions in Table 8.2.2.2.9-1 and in Table 8.2.2.2.9-2 shall apply.

8.2.4.2.10 Interruptions at direct SCell activation

When one or multiple SCell(s) are directly activated at SCell addition:

- the UE is allowed an interruption on any active serving cell:
- of up to the duration shown in Table 8.2.4.2.1-1, if the active serving cell is not in the same band as the SCell being directly activated, where the requirements for Sync apply for synchronous NR-DC, and for asynchronous NR-DC if the active serving cell is in the same CG as the SCell being directly activated, and the requirements for Async apply for asynchronous NR-DC if the active serving cell is not in the same CG as the SCell being directly activated, or
- of up to the duration shown in Table 8.2.4.2.1-2, if the active serving cells are in the same band as the SCell being directly activated provided the cell specific reference signals from the active serving cells and the SCell being directly activated are available in the same slot.

8.2.4.2.11 Interruptions when identifying CGI of an NR cell with autonomous gaps

When a UE is identifying CGI of an NR cell with autonomous gaps, the UE is allowed interruptions on PCell, PSCell or any activated SCell:

- with up to K1 interruptions with interrupted slots up to interruption length X1 specified in Table 8.2.4.2.11-1 for each interruption during MIB decoding time period T_{MIB} (ms) specified in clause 9.11.
- with up to L1 interruptions with interrupted slots up to interruption length Y1 specified in Table 8.2.4.2.11-1 for each interruption during SIB1 decoding time period T_{SIB1} (ms) specified in clause 9.11 for SSB and CORESET for RMSI scheduling multiplexing patterns 1.
- with up to L2 interruptions with interrupted slots up to interruption length Y2 specified in Table 8.2.4.2.11-1 for each interruption during SIB1 decoding time period T_{SIB1} (ms) specified in clause 9.11 for SSB and CORESET for RMSI scheduling multiplexing patterns 2 and 3.

Where:

- $K1 = 6$ for the target cell carrier frequency on FR1 and $K1 = 25$ for the target cell carrier frequency on FR2, and
- $L1 = T_{\text{SIB1}}/20$, and
- $L2 = T_{\text{SIB1}}/T_{\text{SMTC}}$, where T_{SMTC} is the periodicity of the SMTC occasion configured for the target cell carrier.

Table 8.2.4.2.11-1: Interruption length X1, Y1 and Y2 during measurements with autonomous gaps

μ	NR Slot length (ms) of victim cell	Interruption length X1 (slots)	Interruption length Y1 (slots)	Interruption length Y2 (slots)
0	1	6	7	6
1	0.5	12	13	10
2	0.25	24	25	19
3	0.125	48	49	37
5	0.03125	192	193	145
6	0.015625	384	385	289

8.2.4.2.12 Interruptions when identifying CGI of an E-UTRA cell with autonomous gaps

When a UE is identifying CGI of an E-UTRA FDD cell or E-UTRA TDD cell with autonomous gaps, within time period $T_{\text{identify_CGI, E-UTRA}}$ specified in clause 9.4.7.1, the UE shall be able to transmit at least the number of ACK/NACKs specified in Table 8.2.4.2.12-1 on PCell, PSCell or any activated SCell in the frequency range where autonomous gaps are used, provided that:

- there is continuous DL data allocation,
- no DRX cycle is used,
- no measurement gaps are configured,
- only one code word is transmitted in each slot,
- 2 slot ACK/NACK feedback is configured,
- 20 ms SMTC period is configured.

Table 8.2.4.2.12-1: Minimum number of ACK/NACKs transmitted by the UE during $T_{\text{identify_CGI, E-UTRA}}$

Minimum number of transmitted ACK/NACKs	Configuration of the serving cell in which the transmitted ACK/NACKs are counted	
	Duplex mode configuration	SCS
84	FDD	15 kHz
193	FDD	30 kHz
402	FDD	60 kHz
28	TDD ^{Note 1}	15 kHz
81	TDD ^{Note 1}	30 kHz
159	TDD ^{Note 1}	60 kHz
233	TDD ^{Note 2}	60 kHz
491	TDD ^{Note 2}	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18].		
NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

8.2.4.2.13 Interruptions due to SCell dormancy

8.2.4.2.13.1 Interruptions due to SCell dormancy switch

When one SCell in MCG or SCG is switched from dormancy to non-dormancy or from non-dormancy to dormancy [7] when UE is in DRX active time,

- the UE is allowed an interruption on active serving cell in MCG and SCG as defined in clause 8.2.4.2.5, except that the interruption is allowed regardless of which parameters change between the dormant BWP and the non-dormant BWP
- The starting time of interruption shall be within the dormancy switching delay as defined in clause 8.6.2.

When multiple SCells in MCG or SCG are switched from dormancy to non-dormancy or vice versa when the UE is in DRX active time, the interruption requirement described above applies for each BWP switch.

8.2.4.2.13.2 Interruptions due to CQI measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of CQI measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from CQI measurements on dormant SCells shall not exceed 0.5%.

8.2.4.2.13.3 Interruptions due to RRM measurements during SCell dormancy

When one or more SCells are in dormancy, the UE is for the purpose of RRM measurements on the dormant SCell(s) allowed to cause interruptions to non-dormant serving cell(s).

The rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from RRM measurements on dormant SCells shall not exceed 1.0%.

8.2.4.2.14 Interruptions at NR SRS antenna port switching

The requirements in this clause are applicable to SRS antenna port switching on FR1 and SRS resource(s) is only configured within the last 6 symbols of a slot. For interruption caused by SRS antenna port switching, the victim cell is based on the entry number of the band indicated by *txSwitchImpactToRx* and/or *txSwitchWithAnotherBand* regardless of per-FR MG capability. An UL interruption is allowed on any of the serving cells as indicated in *txSwitchWithAnotherBand*, and a DL interruption is allowed on any of the serving cells as indicated in *txSwitchImpactToRx*.

The UE shall perform SRS antenna port switching only if the below conditions are met.

- the SRS switching is not colliding with any other UL transmission with higher priority defined in TS 38.214 [26] if the serving cell on which the higher priority transmission is performed is a victim cell based on *txSwitchWithAnotherBand* or is the same carrier on which SRS is transmitted.
- the SRS switching is not colliding with any NR measurements (i.e. SSB/CSI-RS based L1/L3 measurements) and the measurements for RLM/BFD/CBD if the serving cell on which the NR measurements and the measurements for RLM/BFD/CBD is performed is a victim cell based on *txSwitchImpactToRx* or is the same carrier on which SRS is transmitted.

No requirements are defined for SRS antenna port switching if aperiodic SRS switching is colliding with aperiodic L1-RSRP/L1-SINR measurements and the serving cell on which the aperiodic L1-RSRP/L1-SINR measurement is configured is indicated in *txSwitchImpactToRx* or is the same carrier on which aperiodic SRS is scheduled/configured.

When 1 SRS symbol is configured in a slot for SRS antenna switching and the aggressor and victim cells are synchronized, the interruption requirement in Table 8.2.4.2.14-1 applies. When 1 SRS symbol is configured in a slot for SRS antenna switching and the aggressor and victim cells are asynchronized, the interruption requirement in Table 8.2.4.2.14-2 applies. For the rest of SRS configurations, the interruption requirement in Table 8.2.4.2.14-3 applies.

Table 8.2.4.2.14-1: Interruption length in symbols of victim CC when 1 SRS symbol is configured, and aggressor and victim cells are synchronized

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	3	2	2
30	4	3	3
60	8	6	5
120	14	10	8

Table 8.2.4.2.14-2: Interruption length in slots of victim CC when 1 SRS symbol is configured, and aggressor and victim cells are asynchronized

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	2	2	2
30	2	2	2

60	2	2	2
120	2	2	2

Table 8.2.4.2.14-3: Interruption length in slots of victim CC for rest of the SRS configurations for synchronised and asynchronised scenarios

Victim cell SCS(kHz)	Aggressor cell SCS (kHz)		
	15	30	60
15	2	2	2
30	2	2	2
60	3	2	2
120	5	3	3

8.2.4.2.15 Interruptions at fast SCell activation

The requirements in this clause shall apply for the UE configured with one SCell when aperiodic CSI-RS resources is configured for fast SCell activation.

When one SCell in MCG or SCG is activated from deactivated, and aperiodic CSI-RS resources is configured for fast SCell activation, the UE is allowed.

- an interruption on any active serving cell:
 - of up to the duration shown in table 8.2.4.2.2-1, if the active serving cell is not in the same band as the SCell being activated, where the requirements for Sync apply for synchronous NR-DC, and for asynchronous NR-DC if the active serving cell is in the same CG as the SCell being activated, and the requirements for Async apply for asynchronous NR-DC if the active serving cell is not in the same CG as the SCell being activated, or
 - of up to $Y2 \text{ slots} + T_{\text{ATRS_duration}}$ if the active serving cells are in the same band as the SCell being activated, when
 - SCell to be activated is known and belongs to FR1, if the measurement period of the SCell being activated is larger than 2400ms, or
 - SCell is unknown and belongs to FR1, and SCell is contiguous to an active serving cell in the same band
 - of up to Y2 slot if the active serving cells are in the same band as any of the SCells being activated, when
 - SCell to be activated is known and belongs to FR1, if the measurement period of the SCell being activated is equal to or smaller than 2400ms, or
- SCell to be activated belongs to FR2

Where

- $T_{\text{ATRS_duration}}$ is CSI-RS burst for SCell activation where the CSI-RS burst is defined as four CSI-RS resources in two consecutive slots on the being activated SCell.
- Y2 are specified in Table 8.2.3.2.4-2.

8.2.4.2.16 Interruptions at SCG activation/deactivation

When SCG is activated or deactivated using an *RRConnectionReconfiguration* message as defined in TS 38.331 [2], the UE is allowed an interruption on any activated serving cell in MCG during the RRC reconfiguration procedure as follows:

- an interruption on any active serving cell in MCG:

- of up to the duration shown in table 8.2.4.2.16-1, if the active serving cell is not in the same band as the PSCell being activated or deactivated, where the requirements for Sync apply for synchronous NR-DC. The requirements for Async apply for asynchronous NR-DC.

Table 8.2.4.2.16-1: Interruption duration for SCG activation/deactivation for inter-band DC/CA

μ	NR Slot length (ms) of victim cell	Interruption length (slots)		
		Sync		Async
0	1	1		2
1	0.5	2		3
2	0.25	Both aggressor cell and victim cell are on FR2	4	5
		Either aggressor cell or victim cell is on FR1	5	
3	0.125	Aggressor cell is on FR2	8	9
		Aggressor cell is on FR1	9	

8.2.4.2.17 Interruptions due to RRM measurements on deactivated SCG

If the UE is not configured with RLM or BFD on the deactivated PSCell, interruptions on PCell or activated SCell(s) due to measurements on the deactivated PSCell are allowed with up to 0.5% probability of missed ACK/NACK feedback when the configured *measCyclePSCell* is 640ms or longer. The UE is only allowed to cause interruptions on PCell or activated SCell(s) immediately before and immediately after an SMTC. Each interruption shall not exceed requirement in Table 8.2.2.2.2-1.

If the UE is configured with RLM or BFD on the deactivated PSCell, the rate of ACK/NACK feedback loss on any active serving cell resulting from RRM measurements on the deactivated PSCell shall not exceed 1.0%.

8.2.4.2.18 Interruptions during RLM/BFD measurements on deactivated PSCell

When PSCell is configured with *bfd-and-RLM* with value *true*, if NR PSCell is deactivated, the UE is for the purpose RLM/BFD measurements on the deactivated PSCell allowed to cause interruptions to activated serving cell(s) which can either be Pcell or SCell in MCG.

The rate of ACK/NACK feedback loss on any activated serving cell resulting from RLM/BFD measurements on deactivated PSCell shall not exceed 0.5%.

8.2.4.2.19 Interruptions due to UE-specific CBW change

The requirements in clause 8.2.2.2.8 apply for this clause.

8.2.4.2A Void

8.2.4.2A.1 Void

8.2.4.2A.2 Void

8.2.4.2A.3 Void

8.3 SCell Activation and Deactivation Delay

8.3.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to activate at least one deactivated SCell and deactivate at least one activated SCell in EN-DC, or in standalone NR carrier aggregation, or in NE-DC, or in NR-DC.

The requirements shall apply for EN-DC, standalone NR carrier aggregation, NE-DC, and NR-DC.

8.3.2 SCell Activation Delay Requirement for Deactivated SCell

The requirements in this clause shall apply for the UE configured with at least one downlink SCell in EN-DC, or in standalone NR carrier aggregation or in NE-DC or in NR-DC and when one SCell is being activated.

The delay within which the UE shall be able to activate the deactivated SCell depends upon the specified conditions.

Upon receiving SCell activation command in slot n , the UE shall be capable to transmit valid CSI report and apply actions related to the activation command for the SCell being activated no later than in slot $n +$

$\frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{NR\ slot\ length}$, where:

T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3]

$T_{activation_time}$ is the SCell activation delay in millisecond.

If the SCell is known and belongs to FR1, $T_{activation_time}$ is:

- $T_{FirstSSB} + 5\text{ms}$, if the measurement period of the SCell being activated is equal to or smaller than 2400ms.
- $T_{FirstSSB_MAX} + T_{rs} + 5\text{ms}$, if the measurement period of the SCell being activated is larger than 2400ms.

If the SCell is unknown and belongs to FR1, and if one of the following conditions is met

- ‘ssb-PositionInBurst’ indicates only one SSB is being actually transmitted, or
- ‘ssb-PositionInBurst’ indicates multiple SSBs and TCI indication is provided in same MAC PDU with SCell activation,

provided that the side condition $\hat{E}_s/I_{ot} \geq -2\text{dB}$ is fulfilled, $T_{activation_time}$ is:

- $T_{FirstSSB_MAX} + T_{SMTC_MAX} + T_{rs} + 5\text{ms}$, if the following conditions are met,
 - the SCell is contiguous to an active serving cell in the same band, and
 - its *ssb-PositionInBurst* is same as the one of contiguous FR1 active serving cell, and
 - its SMTC offset is same as the one of contiguous FR1 active serving cell, and
 - its RTD with contiguous FR1 active serving cell is smaller than or equal to 260ns and its reception power difference with contiguous FR1 active serving cell is smaller than or equal to 6dB;
- $T_{FirstSSB_MAX} + T_{SMTC_MAX} + 2 \cdot T_{rs} + 5\text{ms}$, otherwise.

otherwise, provided that the side condition $\hat{E}_s/I_{ot} \geq -2\text{dB}$ is fulfilled, $T_{\text{activation_time}}$ is:

- $6\text{ms} + T_{\text{FirstSSB_MAX}} + T_{\text{SMTC_MAX}} + T_{\text{rs}} + T_{\text{L1-RSRP,measure}} + T_{\text{L1-RSRP,report}} + T_{\text{HARQ}} + \max(T_{\text{uncertainty_MAC}} + T_{\text{FineTiming}} + 2\text{ms}, T_{\text{uncertainty_SP}})$, if semi-persistent CSI-RS is used for CSI reporting,
- $3\text{ms} + T_{\text{FirstSSB_MAX}} + T_{\text{SMTC_MAX}} + T_{\text{rs}} + T_{\text{L1-RSRP,measure}} + T_{\text{L1-RSRP,report}} + \max(T_{\text{HARQ}} + T_{\text{uncertainty_MAC}} + 5\text{ms} + T_{\text{FineTiming}}, T_{\text{uncertainty_RRC}} + T_{\text{RRC_delay}})$, if periodic CSI-RS is used for CSI reporting.
- However, when the following conditions are fulfilled, no activation requirement will be applied for this unknown SCell:
 - the SCell is contiguous to an active serving cell in the same band, and
 - A single SSB is used in the unknown SCell; or multiple SSBs are used in the SCell and TCI state indication for PDCCH is provided by the same MAC PDU used for SCell activation; and
 - its *ssb-PositionInBurst* is same as the one of contiguous FR1 active serving cell, and
 - its SMTC offset is same as the one of contiguous FR1 active serving cell
 - its RTD with contiguous FR1 active serving cell is larger than 260ns, or its reception power difference with contiguous FR1 active serving cell is larger than 6dB;

If the SCell being activated belongs to FR1 and if there is at least one active serving cell contiguous to the SCell on that FR1 band, if the UE is not provided with SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration for the target SCell, $T_{\text{activation_time}}$ is 3 ms for UE supporting *scellWithoutSSB*, provided

- The RTD between the target SCell and the contiguous active serving cell is within $\pm 260\text{ns}$, and
- The difference of the reception power with the contiguous active serving cell is $\leq 6\text{dB}$, and
- The RS(s) of SCell being activated is (are) QCL-TypeA with TRS(s) of the SCell being activated, and the TRS(s) of the SCell being activated is (are) further QCL-TypeC with SSB(s) of any active serving cell that is contiguous to the SCell being activated on that FR1 band.

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, then $T_{\text{activation_time}}$ is $T_{\text{FirstSSB}} + 5\text{ms}$ provided:

- The UE is provided with SMTC for the target SCell, and
- The SSBs in the serving cell(s) and the SSBs in the SCell fulfil the condition defined in clause 3.6.3, and
- The parameter *ssb-PositionsInBurst* is same for the serving cell(s) and the SCell, and
- SSB is in the same half-frame on the SCell and the FR2 active serving cell.

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, if the UE supporting *scellWithoutSSB* is not provided with any SMTC for the target SCell, $T_{\text{activation_time}}$ is 3 ms, provided

- the RS (s) of SCell being activated is (are) QCL-TypeD with RS (s) of one active serving cell on that FR2 band.

If the SCell being activated belongs to FR2 and if there is no active serving cell on that FR2 band provided that PCell or PSCell is in FR1 or in FR2:

If the target SCell is known to UE and semi-persistent CSI-RS is used for CSI reporting, then $T_{\text{activation_time}}$ is:

- $3\text{ms} + \max(T_{\text{uncertainty_MAC}} + T_{\text{FineTiming}} + 2\text{ms}, T_{\text{uncertainty_SP}})$, where $T_{\text{uncertainty_MAC}}=0$ and $T_{\text{uncertainty_SP}}=0$ if:
 - UE receives the SCell activation command, semi-persistent CSI-RS activation command and TCI state activation command at the same time, or
 - Provided this is the initial activation after SCell addition, and
 - TCI-ActivatedConfig is configured for the SCell, and UE receives the SCell activation command and semi-persistent CSI-RS activation command at the same time.

If the target SCell is known to UE and periodic CSI-RS is used for CSI reporting, then $T_{\text{activation_time}}$ is:

- $\max(T_{\text{uncertainty_MAC}} + 5\text{ms} + T_{\text{FineTiming}}, T_{\text{uncertainty_RRC}} + T_{\text{RRC_delay}} - T_{\text{HARQ}})$, where $T_{\text{uncertainty_MAC}}=0$ if:
 - UE receives the SCell activation command and TCI state activation commands at the same time, or
 - Provided this is the initial activation after SCell addition, and
- UE receives the SCell activation command and TCI-ActivatedConfig is configured for the SCell.

If the PCell/PSCell and the target SCell are configured as FR1-FR2-1 CA or if the PCell/PSCell and the target SCell are in a FR2-1 band pair with independent beam management, and the target SCell is unknown to UE and semi-persistent CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}_s/I_{ot} \geq -2\text{dB}$ is fulfilled, then $T_{\text{activation_time}}$ is:

- $6\text{ms} + T_{\text{FirstSSB_MAX}} + 15 \cdot T_{\text{SMTC_MAX}} + 8 \cdot T_{\text{TS}} + T_{\text{L1-RSRP, measure}} + T_{\text{L1-RSRP, report}} + T_{\text{HARQ}} + \max(T_{\text{uncertainty_MAC}} + T_{\text{FineTiming}} + 2\text{ms}, T_{\text{uncertainty_SP}})$.

If the PCell/PSCell and the target SCell are configured as FR1-FR2-2 CA or if the PCell/PSCell and the target SCell are in a FR2-2 band pair with independent beam management, and the target SCell is unknown to UE and semi-persistent CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}_s/I_{ot} \geq -2\text{dB}$ is fulfilled, then $T_{\text{activation_time}}$ is:

- $6\text{ms} + T_{\text{FirstSSB_MAX}} + 23 \cdot T_{\text{SMTC_MAX}} + 12 \cdot T_{\text{TS}} + T_{\text{L1-RSRP, measure}} + T_{\text{L1-RSRP, report}} + T_{\text{HARQ}} + \max(T_{\text{uncertainty_MAC}} + T_{\text{FineTiming}} + 2\text{ms}, T_{\text{uncertainty_SP}})$.

If the PCell/PSCell and the target SCell are configured as FR1-FR2-1 CA or if the PCell/PSCell and the target SCell are in a FR2-1 band pair with independent beam management, and the target SCell is unknown to UE and periodic CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}_s/I_{ot} \geq -2\text{dB}$ is fulfilled, then $T_{\text{activation_time}}$ is:

- $3\text{ms} + T_{\text{FirstSSB_MAX}} + 15 \cdot T_{\text{SMTC_MAX}} + 8 \cdot T_{\text{TS}} + T_{\text{L1-RSRP, measure}} + T_{\text{L1-RSRP, report}} + \max\{(T_{\text{HARQ}} + T_{\text{uncertainty_MAC}} + 5\text{ms} + T_{\text{FineTiming}}), (T_{\text{uncertainty_RRC}} + T_{\text{RRC_delay}})\}$.

If the PCell/PSCell and the target SCell are configured as FR1-FR2-2 CA or if the PCell/PSCell and the target SCell are in a FR2-2 band pair with independent beam management, and the target SCell is unknown to UE and periodic CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}_s/I_{ot} \geq -2\text{dB}$ is fulfilled, then $T_{\text{activation_time}}$ is:

- $3\text{ms} + T_{\text{FirstSSB_MAX}} + 23 \cdot T_{\text{SMTC_MAX}} + 12 \cdot T_{\text{TS}} + T_{\text{L1-RSRP, measure}} + T_{\text{L1-RSRP, report}} + \max\{(T_{\text{HARQ}} + T_{\text{uncertainty_MAC}} + 5\text{ms} + T_{\text{FineTiming}}), (T_{\text{uncertainty_RRC}} + T_{\text{RRC_delay}})\}$.

where,

$T_{\text{SMTC_MAX}}$:

- In FR1, in case of intra-band SCell activation, $T_{\text{SMTC_MAX}}$ is the longer SMTC periodicity between active serving cells and SCell being activated provided the cell specific reference signals from the active serving cells and the SCells being activated or released are available in the same slot; in case of inter-band SCell activation, $T_{\text{SMTC_MAX}}$ is the SMTC periodicity of SCell being activated.
- In FR2, in case of intra-band SCell activation, $T_{\text{SMTC_MAX}}$ is the longer SMTC periodicity between active serving cells and SCell being activated provided that in Rel-15 only support FR2 intra-band CA; in case of FR2 inter-band SCell activation, $T_{\text{SMTC_MAX}}$ is the SMTC periodicity of SCell being activated.
- $T_{\text{SMTC_MAX}}$ is bounded to a minimum value of 10ms.

T_{TS} is the SMTC periodicity of the SCell being activated if the UE has been provided with an SMTC configuration for the SCell in SCell addition message, otherwise T_{TS} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, T_{TS} is the periodicity of one of the SMTC which is up to UE implementation. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement which involves T_{TS} is applied with T_{TS}

= 5ms assuming the SSB transmission periodicity is 5ms. There are no requirements if the SSB transmission periodicity is not 5ms

T_{FirstSSB} : is the time to the end of the first complete SSB burst indicated by the SMTC, or within 5ms if SMTC is not configured, after slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{NR \text{ slot length}}$.

$T_{\text{FirstSSB_MAX}}$: Is the time to the end of the first complete SSB burst indicated by the SMTC, or within 5ms if SMTC is not configured, after slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{NR \text{ slot length}}$, further fulfilling:

- In FR1, in case of intra-band SCell activation, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of inter-band SCell activation, the first occasion when the SCell being activated is transmitting SSB burst.
- In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

$T_{\text{FineTiming}}$ is the time period between UE finish processing the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and the timing of first complete available SSB corresponding to the TCI state.

$T_{\text{L1-RSRP, measure}}$ is L1-RSRP measurement delay $T_{\text{L1-RSRP_Measurement_Period_SSB}}$ ms or $T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$ based on applicability as defined in clause 9.5 assuming $M=1$ and $T_{\text{Report}}=0$.

$T_{\text{L1-RSRP, report}}$ is delay of acquiring CSI reporting resources.

$T_{\text{uncertainty_MAC}}$ is the time period between reception of the last activation command for PDCCH TCI, PDSCH TCI (when applicable) relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

$T_{\text{uncertainty_RRC}}$ is the time period between reception of the RRC configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

$T_{\text{uncertainty_SP}}$ is the time period between reception of the activation command for semi-persistent CSI-RS resource set for CQI reporting relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

$T_{\text{RRC_delay}}$ is the RRC procedure delay as specified in TS38.331 [2].

Longer delays for RRM measurement requirements, and in case of FR2 also SSB based RLM/BFD/CBD/L1-RSRP measurement requirements, can be expected during the cell detection time for unknown SCell activation.

When *absoluteFrequencySSB* is not configured in *DownlinkConfigCommon* for target SCell but SMTC for target SCell is configured, no requirement would be applied.

$T_{\text{CSI_reporting}}$ is the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2].

SCell in FR1 is known if it has been meeting the following conditions:

- During the period equal to $\max(5 \cdot \text{measCycleSCell}, 5 \cdot \text{DRX cycles})$ for FR1 before the reception of the SCell activation command;
- the UE has sent a valid measurement report for the SCell being activated and

- the SSB measured remains detectable according to the cell identification conditions specified in clause 9.2 and 9.3.
- the SSB measured during the period equal to $\max(5 \cdot \text{measCycleSCell}, 5 \cdot \text{DRX cycles})$ also remains detectable during the SCell activation delay according to the cell identification conditions specified in clause 9.2 and 9.3.

Otherwise SCell in FR1 is unknown.

For the first SCell activation in FR2 bands, the SCell is known if it has been meeting the following conditions:

- During the period equal to 4s for UE supporting power class 1/5 and 3s for UE supporting power class 2/3/4 before UE receives the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and semi-persistent CSI-RS for CQI reporting (when applicable):
 - the UE has sent a valid L3-RSRP measurement report with SSB index, and
 - SCell activation command is received after L3-RSRP reporting and no later than the time when UE receives MAC-CE command for TCI activation
- During the period from L3-RSRP reporting to the valid CQI reporting, the reported SSBs with indexes remain detectable according to the cell identification conditions specified in clauses 9.2 and 9.3, and the TCI state is selected based on one of the latest reported SSB indexes.

Otherwise, the first SCell in FR2 band is unknown. The requirement for unknown SCell applies provided that the activation commands for PDCCH TCI, PDSCH TCI (when applicable), semi-persistent CSI-RS for CQI reporting (when applicable), and configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) are based on the latest valid L1-RSRP reporting.

If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the activation command, $T_{\text{SMTc_SCell}}$ follows *smtc1* or *smtc2* according to the physical cell ID of the target cell being activated. $T_{\text{SMTc_MAX}}$ follows *smtc1* or *smtc2* according to the physical cell IDs of the target cells being activated and the active serving cells.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS 38.331 [2] for a SCell at the first opportunities for the corresponding actions once the SCell is activated.

The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2, shall not occur before slot $n+1+\frac{T_{\text{HARQ}}}{\text{NR slot length}}$ and not occur after slot $n+1+\frac{T_{\text{HARQ}}+3\text{ms}+T_X}{\text{NR slot length}}$, where NR slot length is with respect to the numerology used in the SCell being activated, and T_X is:

- 0, if $T_{\text{activation_time}}$ is 3ms;
- T_{FirstSSB} , for any scenario where $T_{\text{activation_time}}$ includes T_{FirstSSB} ;
- $T_{\text{FirstSSB_MAX}}$, for any scenario where $T_{\text{activation_time}}$ includes $T_{\text{FirstSSB_MAX}}$;
- $T_{\text{uncertainty_MAC}} + T_{\text{FineTiming}}$, for any scenario where $T_{\text{activation_time}}$ includes only $T_{\text{FineTiming}}$ and no $T_{\text{FirstSSB_MAX}}$.

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

The requirements in this clause and requirements on interruption due to SCell activation in clause 8.2 apply provided that the SSB of the to-be-activated SCell is within the first active DL BWP of the SCell.

Starting from the slot specified in clause 4.3 of TS 38.213 [3] (timing for secondary Cell activation/deactivation) and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

Starting from the slot specified in clause 4.3 of TS 38.213 [3] (timing for secondary Cell activation/deactivation) and until the UE has completed a first L1-RSRP measurement, the UE shall report lowest valid L1 SS-RSRP range if the UE has available uplink resources to report L1-RSRP for the SCell.

8.3.3 SCell Deactivation Delay Requirement for Activated SCell

The requirements in this clause shall apply for the UE configured with at least one downlink SCell in EN-DC, or in standalone NR carrier aggregation or in NE-DC or in NR-DC and when one SCell is being deactivated.

Upon receiving SCell deactivation command in slot n , the UE shall accomplish the deactivation actions for the SCell being deactivated no later than in slot $n + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$. The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2, shall not occur before slot $n+1 + \frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot $n+1 + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, where NR slot length is with respect to the numerology used in the SCell being deactivated.

Upon expiry of the *sCellDeactivationTimer* in slot n , the UE shall accomplish the deactivation actions for the SCell being deactivated no later than in slot $n + \frac{3ms}{NR\ slot\ length}$. The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2, shall not occur before slot $n+1$ and not occur after slot $n+1 + \frac{3ms}{NR\ slot\ length}$, where NR slot length is with respect to the numerology used in the SCell being deactivated.

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

8.3.4 Direct SCell Activation at SCell addition

The requirements in this clause apply for UE being configured in the RRC reconfiguration message, TS 38.331 [2], with one SCell for which the parameter *sCellState* is set to *activated*. If the RRC reconfiguration message for direct SCell activation also configures PSCell addition or PSCell change, the direct SCell activation delay may be longer than the requirements defined in this clause.

If the RRC reconfiguration message for direct SCell activation also configures TCI state information, the requirements in section 8.3.2 based on that TCI state activation command is received at the same time as SCell activation command shall apply.

The UE shall configure the SCell in activated state upon successful completion of the RRC reconfiguration procedure within the specified delay. The UE shall be capable to transmit valid CSI report and apply actions for the directly activated SCell no later than in slot $n + \frac{N_{direct}}{NR\ slot\ length}$,

where:

- Slot n is the last slot overlapping with the PDSCH containing the RRC reconfiguration message,
- $N_{direct} = T_{RRC_Process} + T_1 + T_{activation_time} + T_{CSI_Reporting} - 3ms$ for the cases specified in clause 8.3.2 that TCI state is not indicated within $T_{activation_time}$; otherwise, $N_{direct} = T_{RRC_Process} + T_1 + T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}$
- $T_{RRC_Process}$: RRC procedure delay as specified in clause 11.2 of TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC procedure delay defined in clause 12 of TS 38.331 [2],
- T_1 : Delay from slot $n + \frac{T_{RRC_Process}}{NR\ slot\ length}$ until the transmission of *RRCReconfigurationComplete* message,

Note: T_1 is UE implementation dependent.

T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3],

If the SCell is known and belongs to FR1, $T_{CSI_Reporting}$ is specified in clause 8.3.2 and $T_{activation_time}$ is defined as:

- $T_{FirstSSB} + 5ms$, if the measurement period of the SCell being activated is equal to or smaller than 2400ms.
- $T_{FirstSSB_MAX} + T_{rs} + 5ms$, if measurement period of the SCell being activated is larger than 2400ms.

where,

the measurement period in Table 9.2.5.2-1 applies if the target SCell was in an intra-frequency layer corresponding to an activated SCell;

the measurement period in Table 9.2.5.2-3 applies if the target SCell was in an intra-frequency layer corresponding to a deactivated SCell;

the measurement period in Table 9.3.5-1 applies if the target SCell was in an inter-frequency layer.

- Otherwise, $T_{\text{activation_time}}$ and $T_{\text{CSI_Reporting}}$ are specified in clause 8.3.2, where the following definitions of T_{FirstSSB} and $T_{\text{FirstSSB_MAX}}$ shall override the existing ones:
 - T_{FirstSSB} : the time to the end of the first complete SSB burst indicated by the SMTC after slot $n + \frac{T_{\text{RRC_Process}} + T_1}{\text{NR slot length}}$
 - $T_{\text{FirstSSB_MAX}}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot $n + \frac{T_{\text{RRC_Process}} + T_1}{\text{NR slot length}}$
 - In FR1, in case of intra-band SCell activation, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of inter-band SCell activation, the first occasion when the SCell being activated is transmitting SSB burst.
 - In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS38.321 [7] for an SCell at the first opportunities for the corresponding actions once the SCell is activated.

The SCell in FR1 is known provided the following conditions are met for the SCell:

- During the last 5 seconds before the reception of the direct SCell configuration command:
 - the UE has sent a valid measurement report for the SCell being directly activated, and
 - the SSB measured remains detectable according to the cell identification conditions specified in sections 9.2 and 9.3,
- the SSB measured during the period equal to [5] seconds also remains detectable during the SCell activation delay according to the cell identification conditions specified in clause 9.2 and 9.3.

Otherwise, the SCell is unknown.

The SCell in FR2 is known provided it meets the corresponding conditions as defined in clause 8.3.2. Otherwise, the SCell is unknown.

The UE may be allowed to cause interruptions to serving cells on other component carriers during an interruption window, as specified in clause 8.2. The starting point of an interruption window on spCell or any activated SCell shall not occur before slot $n+1$, and shall not occur after slot $n+1 + \frac{T_{\text{RRC_Process}} + T_1 + T_X}{\text{NR slot length}}$, where NR slot length is with respect to the numerology of the SCell being activated, and T_X is:

- T_{FirstSSB} , for any scenario where $T_{\text{activation_time}}$ includes T_{FirstSSB} ;
- $T_{\text{FirstSSB_MAX}}$, for any scenario where $T_{\text{activation_time}}$ includes $T_{\text{FirstSSB_MAX}}$;
- $T_{\text{uncertainty_MAC}} + T_{\text{FineTiming}}$, for any scenario where $T_{\text{activation_time}}$ includes $T_{\text{FineTiming}}$.

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

Starting from the slot $n + \frac{T_{\text{RRC_Process}} + T_1}{\text{NR slot length}}$ until the UE has completed the direct SCell activation, the UE shall report CQI index = 0 (out of range) if the UE has available uplink resources to report CQI for the SCell.

8.3.5 Direct SCell Activation at Handover

The requirements in this clause apply for UE being configured in the RRC reconfiguration message, TS 38.331 [2], for handover with one SCell for which the parameter *sCellState* is set to *activated*.

The UE shall configure the SCell in activated state upon successful completion of the RRC reconfiguration procedure within the specified delay. The UE shall be capable to transmit valid CSI report and apply actions for the directly activated SCell no later than in slot $n + \frac{N_{direct}}{NR\ slot\ length}$,

Where:

- Slot n is the last slot overlapping with the PDSCH containing RRC reconfiguration message.
- $N_{direct} = T_{RRC_process} + T_{interrupt} + T_2 + T_3 + T_{activation_time} + T_{CSI_Reporting} - 3ms$ for the cases specified in clause 8.3.2 that TCI state is not indicated within $T_{activation_time}$; otherwise, $N_{direct} = T_{RRC_process} + T_{interrupt} + T_2 + T_3 + T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}$
- $T_{RRC_Process}$: RRC procedure delay as specified in clause 11.2 of TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC procedure delay defined in clause 12 of TS 38.331 [2],
- $T_{interrupt}$: Interruption time during handover as specified in clause 6.1.1,
- T_2 : Delay from slot $n + \frac{T_{RRC_Process} + T_{interrupt}}{NR\ slot\ length}$ until UE has obtained a valid TA command for the target PCell,
- T_3 : Delay for applying the received TA for uplink transmission in the target PCell, and greater than or equal to $k+1$ slot, where k is defined in clause 4.2 in TS 38.213,
- T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3],
- If the SCell is known and belongs to FR1, $T_{CSI_Reporting}$ is specified in clause 8.3.2 and $T_{activation_time}$ is defined as:
 - $T_{FirstSSB} + 5ms$, if the measurement period of the SCell being activated is equal to or smaller than 2400ms.
 - $T_{FirstSSB_MAX} + T_{rs} + 5ms$, if measurement period of the SCell being activated is larger than 2400ms.

where,

the measurement period in Table 9.2.5.2-1 applies if the target SCell was in an intra-frequency layer corresponding to an activated SCell;

the measurement period in Table 9.2.5.2-3 applies if the target SCell was in an intra-frequency layer corresponding to a deactivated SCell;

the measurement period in Table 9.3.5-1 applies if the target SCell was in an inter-frequency layer.

- Otherwise, $T_{activation_time}$ and $T_{CSI_Reporting}$ are specified in clause 8.3.2, where the following definitions of $T_{FirstSSB}$ and $T_{FirstSSB_MAX}$ shall override the existing ones:
 - $T_{FirstSSB}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot $n + \frac{T_{RRC_Process} + T_{interrupt} + T_2 + T_3}{NR\ slot\ length}$
 - $T_{FirstSSB_MAX}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot $n + \frac{T_{RRC_Process} + T_{interrupt} + T_2 + T_3}{NR\ slot\ length}$
 - In FR1, in case of intra-band SCell activation, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of inter-band SCell activation, the first occasion when the SCell being activated is transmitting SSB burst.
 - In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS 38.321 [7] for an SCell at the first opportunities for the corresponding actions once the SCell is activated.

The SCell in FR1 is known provided the following conditions are met for the SCell:

- During the last 5 seconds before the reception of the direct SCell configuration command:

- the UE has sent a valid measurement report for the SCell being directly activated, and
- the SSB measured remains detectable according to the cell identification conditions specified in sections 9.2 and 9.3,
- the SSB measured during the period equal to [5] seconds also remains detectable during the SCell activation delay according to the cell identification conditions specified in clause 9.2 and 9.3.

Otherwise, the SCell is unknown.

The SCell in FR2 is known provided it meets the corresponding conditions as defined in clause 8.3.2. Otherwise, the SCell is unknown.

The UE may be allowed to cause interruptions to PCell during an interruption window, as specified in clause 8.2. The starting point of an interruption window on PCell shall not occur before slot $n+1 + \frac{T_{RRC\ Processing} + T_{interrupt} + T_2 + T_3}{NR\ slot\ length}$, and not occur after slot $n+1 + \frac{T_{RRC\ Processing} + T_{interrupt} + T_2 + T_3 + T_X}{NR\ slot\ length}$, where NR slot length is with respect to the numerology of the SCell being activated, and T_X is:

- $T_{FirstSSB}$, for any scenario where $T_{activation_time}$ includes $T_{FirstSSB}$;
- $T_{FirstSSB_MAX}$, for any scenario where $T_{activation_time}$ includes $T_{FirstSSB_MAX}$;
- $T_{uncertainty_MAC} + T_{FineTiming}$, for any scenario where $T_{activation_time}$ includes $T_{FineTiming}$.

The length of the interruption window depends on the frequency band relation between the aggressor SCell and the victim PCell.

Starting from the slot $n + \frac{T_{RRC_Process} + T_{interrupt} + T_2 + T_3}{NR\ slot\ length}$ and until the UE has completed the direct SCell activation, the UE shall report CQI index = 0 (out of range) if the UE has available uplink resources to report CQI for the SCell.

8.3.6 Direct SCell Activation at RRCResume

The requirements in this clause apply for UE being configured in the RRC reconfiguration message in TS38.331 [2] for RRC Resume with one SCell for which the parameter *sCellState* is set to *activated*.

The requirements in clause 8.3.4 shall apply, except that the definition of T_1 shall be deemed to be replaced with

T_1 : Delay from slot $n + \frac{T_{RRC_Process}}{NR\ slot\ length}$ until the transmission of RRCResumeComplete message,

8.3.7 SCell Activation Delay Requirement for Deactivated SCell with Multiple Downlink SCells

The requirements in this clause shall apply for the UE configured with more than one downlink SCells.

In EN-DC, NE-DC, standalone NR carrier aggregation, or in one CG of NR-DC, the requirements in this clause shall apply when the following conditions are met:

- UE only receives one single MAC command for multiple SCell activation within the activation period defined in this clause
- in each single CG, there are no other SCell activation, deactivation, addition or release before activation is completed for all the SCells activated by the single MAC CE in this clause, and
- in EN-DC and NE-DC, there are no E-UTRAN SCell activation, deactivation, addition or release before multiple SCell activation is completed in this clause, and
- any to-be-activated unknown SCell has active serving cell(s) or known to-be-activated SCell(s) on the same band

In two CGs of NR-DC, the requirements in this clause shall apply when the following conditions are met:

- UE receives one MAC command per CG for multiple SCell activation within the activation period defined in this clause, and

- UE supports per-FR measurement gap capability, and
- any to-be-activated unknown SCell has active serving cell(s) or known to-be-activated SCell(s) on the same band

The delay within which the UE shall be able to activate the deactivated SCell with other downlink to-be-activated SCell(s) depends upon the specified conditions.

Upon receiving SCell activation command in slot n for more than one SCell, for each of the to-be-activated SCell, the UE shall be capable to transmit valid CSI report and apply actions related to the activation command for the SCell being activated no later than in slot $n + \frac{T_{\text{HARQ}} + T_{\text{activation_time_multiple_cells}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, where:

T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3]

$T_{\text{activation_time_multiple_cells}}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario.

If the SCell is known and belongs to FR1 and the measurement period of the SCell being activated is equal to or smaller than 2400ms, $T_{\text{activation_time_multiple_cells}}$ is:

- $T_{\text{FirstSSB_MAX_multiple_cells}} + T_{\text{rs}} + 5\text{ms}$, if on the same band UE also has at least one parallel to-be-activated SCell which is FR1 known SCell with the measurement period larger than 2400ms but does not have any parallel to-be-activated SCell which is FR1 unknown SCell.
- $T_{\text{FirstSSB_MAX_multiple_cells}} + T_{\text{SMTC_MAX_multiple_cells}} + T_{\text{rs}} + 5\text{ms}$, if on the same band UE also has at least one parallel to-be-activated SCell which is FR1 unknown SCell
- otherwise, $T_{\text{FirstSSB_MAX_multiple_cells}} + 5\text{ms}$.

If the SCell is known and belongs to FR1 and the measurement period of the SCell being activated is larger than 2400ms, $T_{\text{activation_time_multiple_cells}}$ is:

- $T_{\text{FirstSSB_MAX_multiple_cells}} + T_{\text{SMTC_MAX_multiple_cells}} + T_{\text{rs}} + 5\text{ms}$, if on the same band UE also has at least one parallel to-be-activated SCell which is FR1 unknown SCell
- otherwise, $T_{\text{FirstSSB_MAX_multiple_cells}} + T_{\text{rs}} + 5\text{ms}$

If the SCell is unknown and belongs to FR1, provided that the side condition $\hat{E}_s/I_{\text{ot}} \geq -2\text{dB}$ is fulfilled, $T_{\text{activation_time_multiple_cells}}$ is:

- $T_{\text{FirstSSB_MAX_multiple_cells}} + T_{\text{SMTC_MAX_multiple_cells}} + T_{\text{rs}} + 5\text{ms}$, if the SCell is not counted in N_1
- The activation delay may be longer if SSB is not in the same half-frame on the SCell and the contiguous FR1 known cell or contiguous FR1 active serving cell

otherwise

- if the following conditions are met
 - ‘ssb-PositionInBurst’ indicates only one SSB is being actually transmitted, or
 - ‘ssb-PositionInBurst’ indicates multiple SSBs and TCI indication is provided in same MAC PDU with SCell activation,
- $T_{\text{activation_time_multiple_cells}}$ is:
 - $T_{\text{FirstSSB_MAX_multiple_cells}} + T_{\text{SMTC_MAX_multiple_cells}} + T_{\text{rs}} * N_1 + T_{\text{rs}} + 5\text{ms}$,
- Otherwise:

$T_{\text{activation_time_multiple_cells}}$ is:

- $6\text{ms} + T_{\text{FirstSSB_MAX_multiple_cells}} + T_{\text{SMTC_MAX_multiple_cells}} + T_{\text{rs}} * N_1 + T_{\text{L1-RSRP,measure}} + T_{\text{L1-RSRP,report}} + T_{\text{HARQ}} + \max(T_{\text{uncertainty_MAC_multiple_cells}} + T_{\text{FineTiming}} + 2\text{ms}, T_{\text{uncertainty_SP_multiple_cells}})$, if semi-persistent CSI-RS is used for CSI reporting,

- $3\text{ms} + T_{\text{FirstSSB_MAX_multiple_cells}} + T_{\text{SMTC_MAX_multiple_cells}} + T_{\text{rs}} \cdot N_1 + T_{\text{L1-RSRP,measure}} + T_{\text{L1-RSRP,report}} + \max(T_{\text{HARQ}} + T_{\text{uncertainty_MAC_multiple_cells}} + 5\text{ms} + T_{\text{FineTiming}}, T_{\text{uncertainty_RRC_multiple_cells}} + T_{\text{RRC_delay}})$, if periodic CSI-RS is used for CSI reporting.

If the SCell being activated belongs to FR1 and if there is at least one active serving cell contiguous to the SCell on that FR1 band, if the UE is not provided with SSB configuration (*absoluteFrequencySSB*) nor SMTC configuration for the target SCell, $T_{\text{activation_time_multiple_cells}}$ is same as single SCell activation delay requirement as defined in clause 8.3.2.

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, then $T_{\text{activation_time_multiple_cells}}$ is same as single SCell activation delay requirement as defined in clause 8.3.2.

If the SCell being activated belongs to FR2 and if there is no active serving cell on that FR2 band provided that PCell or PSCell is FR1:

If the target SCell is known to UE and semi-persistent CSI-RS is used for CSI reporting, then $T_{\text{activation_time_multiple_cells}}$ is same as single SCell activation delay requirement as defined in clause 8.3.2.

If the target SCell is known to UE and periodic CSI-RS is used for CSI reporting, then $T_{\text{activation_time_multiple_cells}}$ is same as single SCell activation delay requirement as defined in clause 8.3.2.

If the target SCell is unknown to UE and semi-persistent CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}_s/\text{Iot} \geq -2\text{dB}$ is fulfilled, then $T_{\text{activation_time_multiple_cells}}$ is:

- $3\text{ ms} + \max(T_{\text{uncertainty_MAC_multiple_cells}} + T_{\text{FineTiming}} + 2\text{ms}, T_{\text{uncertainty_SP_multiple_cells}})$, if on the same band UE also has at least one parallel to-be-activated SCell which is FR2 known SCell. $T_{\text{uncertainty_MAC_multiple_cells}} = 0$ and $T_{\text{uncertainty_SP_multiple_cells}} = 0$ if:
 - UE receives the SCell activation command, semi-persistent CSI-RS activation command and TCI state activation commands at the same time, or
 - Provided this is the initial activation after SCell addition, and
 - TCI-ActivatedConfig is configured for the SCell, and UE receives the SCell activation command and semi-persistent CSI-RS activation command at the same time.

If the target SCell is unknown to UE and periodic CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}_s/\text{Iot} \geq -2\text{dB}$ is fulfilled, then $T_{\text{activation_time_multiple_cells}}$ is:

- $\max(T_{\text{uncertainty_MAC_multiple_cells}} + 5\text{ms} + T_{\text{FineTiming}}, T_{\text{uncertainty_RRC_multiple_cells}} + T_{\text{RRC_delay}} - T_{\text{HARQ}})$, if on the same band UE also has at least one parallel to-be-activated SCell which is FR2 known SCell. $T_{\text{uncertainty_MAC_multiple_cells}} = 0$ if:
 - UE receives the SCell activation command and TCI state activation commands at the same time, or
 - Provided this is the initial activation after SCell addition, and
 - UE receives the SCell activation command and TCI-ActivatedConfig is configured for the SCell.

The requirements for FR2 unknown SCells apply provided that the parameter *ssb-PositionsInBurst* is same for the SCell and the known serving cell on the same FR2 band. The activation delay FR2 unknown SCell may be longer if SSB is not in the same half-frame on the SCell and the FR2 known cell on the same band.

Where,

N_1 is the number counting for parallel FR1 unknown to-be-activated SCell(s) only except the ones which fulfilled the following conditions:

- contiguous to an active serving cell in the same band, or to a known SCell in the same band being activated by the same MAC PDU, and
- A single SSB is used in the unknown SCell; or multiple SSBs are used in the unknown SCell and TCI state indication for PDCCH is provided by the same MAC PDU used for SCell activation; and

- its *ssb-PositionInBurst* is same as the one of contiguous FR1 known cell or contiguous FR1 active serving cell, and
- its RTD with contiguous FR1 known cell or contiguous FR1 active serving cell is smaller than or equal to 260ns and its reception power difference with contiguous FR1 known cell or contiguous FR1 active serving cell is smaller than or equal to 6dB, and
- its SMTC offset is same as the one of contiguous FR1 known cell or contiguous FR1 active serving cell

However, when the following conditions are fulfilled, no activation requirement will be applied for this unknown SCell and other SCells being activated and counted in N_1 :

- contiguous to an active serving cell in the same band, or to a known SCell in the same band being activated by the same MAC PDU, and
- A single SSB is used in the unknown SCell; or multiple SSBs are used in the unknown SCell and TCI state indication for PDCCH is provided by the same MAC PDU used for SCell activation; and
- its *ssb-PositionInBurst* is same as the one of FR1 known cell or FR1 active serving cell, and
- its RTD with contiguous FR1 known cell or contiguous FR1 active serving cell is larger than 260ns or its reception power difference with contiguous FR1 known cell or contiguous FR1 active serving cell is larger than 6dB, and
- its SMTC offset is same as the one of FR1 known cell or FR1 active serving cell

$T_{\text{SMTC_MAX_multiple_cells}}$:

- In FR1, in case of intra-band SCell activation, $T_{\text{SMTC_MAX_multiple_cells}}$ is the longest SMTC periodicity between active serving cells and SCells being activated on the same band provided the cell specific reference signals from the active serving cells and the SCells being activated or released are available in the same slot; in case of inter-band SCell activation, $T_{\text{SMTC_MAX_multiple_cells}}$ is the longest SMTC periodicity of SCells being activated on the same band.
- In FR2, $T_{\text{SMTC_MAX_multiple_cells}}$ is the longest SMTC periodicity between active serving cells and SCell(s) being activated in FR2 intra-band CA.
- $T_{\text{SMTC_MAX_multiple_cells}}$ is bounded to a minimum value of 10ms.

$T_{\text{FirstSSB_MAX_multiple_cells}}$: is the time to the end of the first complete SSB burst indicated by the SMTC after slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, further fulfilling:

- In FR1, in case of intra-band SCell activation, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of inter-band SCell activation, the first occasion when the SCells being activated are transmitting SSB burst.
- In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

$T_{\text{uncertainty_MAC_multiple_cells}}$ is the time period between reception of the activation command for PDCCH TCI, PDSCH TCI (when applicable) and SCell activation command of this unknown SCell.

$T_{\text{uncertainty_SP_multiple_cells}}$ is the time period between reception of the activation command for semi-persistent CSI-RS resource set for CQI reporting and SCell activation command of this unknown SCell.

$T_{\text{uncertainty_RRC_multiple_cells}}$ is the time period between reception of the RRC configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) and SCell activation command of this unknown SCell.

T_{rs} , $T_{\text{FineTiming}}$, and $T_{\text{RRC_delay}}$ is defined in clause 8.3.2.

Longer delays for RRM measurement requirements, and in case of FR2 also SSB based RLM/BFD/CBD/L1-RSRP measurement requirements, can be expected during the cell detection time for unknown SCell activation.

The condition of known SCell in FR1 or FR2 is defined in clause 8.3.2.

If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the activation command, $T_{\text{SMTc_SCell}}$ follows *smtc1* or *smtc2* according to the physical cell ID of the target cell being activated. $T_{\text{SMTc_MAX_multiple_scell}}$ follows *smtc1* or *smtc2* according to the physical cell IDs of the target cells being activated and the active serving cells.

The starting point and the end-point of an interruption window on PCell or any activated SCell in MCG for NR standalone mode, or on PSCell or any activated SCell in SCG for EN-DC mode is same as single SCell activation requirement in clause 8.3.2.

Starting from the slot specified in clause 4.3 of TS 38.213 [3] (timing for secondary Cell activation/deactivation) and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

Upon receiving SCell activation command in slot n , if the start of the first complete SSB used in the T_X in the different bands which have SCells being activated after $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ are not aligned on time domain among

- SCells in different bands being activated by the same MAC CE if UE does not support per FR gap, or
- SCells in different FR1 bands being activated by the same MAC CE if UE supports per FR gap,

additional interruptions may be expected for the activated serving cells, where

- The number of additional interruptions is no more than the number of FR1 bands which have both SCell being activated for which the activation requirements involve $T_{\text{FirstSSB_MAX multiple_scells}}$ with T_{rs} and the active serving cell, and
- In each interruption occasion, the interruption length is defined in clause 8.2.2.2.2, and
- Longer activation delay may be expected for multiple SCell activation under one MAC CE with multiple interruptions, and
- T_X is:
 - T_{FirstSSB} , for any scenario where $T_{\text{activation_time multiple_scells}}$ includes T_{FirstSSB} ;
 - $T_{\text{FirstSSB_MAX multiple_scells}}$, for any scenario where $T_{\text{activation_time multiple_scells}}$ includes $T_{\text{FirstSSB_MAX multiple_scells}}$;
 - $T_{\text{uncertainty_MAC}} + T_{\text{FineTiming}}$ or $T_{\text{uncertainty_MAC multiple_scells}} + T_{\text{FineTiming}}$, for any scenario where $T_{\text{activation_time multiple_scells}}$ includes $T_{\text{FineTiming}}$.

Otherwise, no additional interruption is expected due to activation of multiple SCells.

Starting from slot $n + T_{\text{HARQ}} + 3 \text{ ms}$ where slot n is the slot where SCell activation command is received (as specified in clause 4.3 of TS 38.213 [3]) and until the SCell activation completion at UE, after at least one CSI-RS transmission occasion for the channel measurement and reporting (specified in clause 5.2.2.5 of TS 38.214 [26]), the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

Starting from the slot specified in clause 4.3 of TS 38.213 [3] (timing for secondary Cell activation/deactivation) and until the UE has completed a first L1-RSRP measurement, the UE shall report lowest valid L1 SS-RSRP range if the UE has available uplink resources to report L1-RSRP for the SCell.

8.3.8 SCell Deactivation Delay Requirement for Activated SCell with Multiple Downlink SCells

The requirements in this clause shall apply for the UE configured with multiple downlink SCells in EN-DC, or in standalone NR carrier aggregation, or in NE-DC, or in NR-DC, provided that,

- in each single CG, there are no other SCell activation, deactivation, addition or release before deactivation is completed for all the SCells deactivated by the single MAC CE in this clause, and
- in EN-DC and NE-DC, there are no E-UTRAN SCell activation, deactivation, addition or release before multiple SCell deactivation is completed in this clause, and

- in EN-DC, NE-DC, NR-DC and standalone NR, UE only receives one single MAC command for multiple SCell deactivation within the deactivation period defined in this clause, or, in NR-DC, per-FR measurement gap capable UE receives one MAC command per CG for multiple SCell deactivation within the deactivation period defined in this clause

Upon receiving SCell deactivation command in slot n , the UE shall accomplish the deactivation actions for the SCell being deactivated within the same delay as specified in clause 8.3.3.

The starting point and the end-point of an interruption window on PCell or any activated SCell in MCG for NR standalone mode, or on PSCell or any activated SCell in SCG for EN-DC mode is same as single SCell activation requirement in clause 8.3.3.

8.3.9 Direct SCell Activation of Multiple Downlink SCells at SCell addition

The requirements in this clause apply for UE being configured in the RRC reconfiguration message, TS 38.331 [2], with 2 SCells for which the parameter *sCellState* is set to *activated*.

In EN-DC, NE-DC, stand-alone NR, or in one CG of NR-DC, the requirements in this clause shall apply when the following conditions are met:

- UE only receives one RRC reconfiguration message for direct activation of SCells within the activation period defined in this clause,
- in each single CG, there are no other SCell activation, deactivation, addition or release before direct activation is completed for all the SCells activated by the single RRC reconfiguration message in this clause, and
- in EN-DC and NE-DC, there are no E-UTRAN SCell activation, deactivation, addition or release before the direct SCell activation of multiple SCells in this clause is completed.

In two CGs of NR-DC, the requirements in this clause shall apply when the following conditions are met:

- UE receives one RRC message per CG for direct activation of SCells within the activation period defined in this clause,
- UE supports per-FR measurement gap capability, and
- any to-be-activated unknown SCell has active serving cell(s) or known to-be-activated SCell(s) on the same band.

The UE shall configure the SCells in activated state upon successful completion of the RRC reconfiguration procedure within the specified delay. The UE shall be capable to transmit valid CSI report and apply actions for the directly activated SCell no later than in slot $n + \frac{N_{direct_multiple_scells}}{NR\ slot\ length}$,

where:

- Slot n is the last slot overlapping with the PDSCH containing the RRC reconfiguration message.
- $N_{direct_multiple_scells} = T_{RRC_Process} + T_1 + T_{activation_time_multiple_scells} + T_{CSI_Reporting} - 3ms$ for the cases specified in clause 8.3.7 that TCI state is not indicated within $T_{activation_time}$; otherwise, $N_{direct_multiple_scells} = T_{RRC_Process} + T_1 + T_{HARQ} + T_{activation_time_multiple_scells} + T_{CSI_Reporting}$
- T_1 and $T_{RRC_Process}$ are specified in clause 8.3.4,
- T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3],
- $T_{activation_time_multiple_scells}$ and $T_{CSI_Reporting}$ are specified in clause 8.3.7, where the following definition of $T_{FirstSSB}$, $T_{FirstSSB_MAX}$, and $T_{FirstSSB_MAX_multiple_scells}$ shall override the existing ones:
 - $T_{FirstSSB}$ and $T_{FirstSSB_MAX}$: as specified in clause 8.3.4,
 - $T_{FirstSSB_MAX_multiple_scells}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot $n + \frac{T_{RRC_Process} + T_1}{NR\ slot\ length}$, further fulfilling:

- In FR1, in case of intra-band SCell activation, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of inter-band SCell activation, the first occasion when the SCells being activated are transmitting SSB burst.
- In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS38.321 [7] for an SCell at the first opportunities for the corresponding actions once the SCell is activated.

The UE may be allowed to cause interruptions to serving cells on other component carriers during an interruption window, as specified in clause 8.2. The starting point of an interruption window on spCell or any activated SCell shall not occur before slot $n+1+\frac{T_{HARQ}}{NR\ slot\ length}$, and shall not occur after slot $n+1+\frac{T_{RRC_Process}+T_1+T_X}{NR\ slot\ length}$, where NR slot length is with respect to the numerology of the SCell being activated, and T_X is:

- $T_{FirstSSB}$, for any scenario where $T_{activation_time_multiple_cells}$ includes $T_{FirstSSB}$;
- $T_{FirstSSB_MAX}$, for any scenario where $T_{activation_time_multiple_cells}$ includes $T_{FirstSSB_MAX}$;
- $T_{FirstSSB_MAX_multiple_cell}$, for any scenario where $T_{activation_time_multiple_cells}$ includes $T_{FirstSSB_MAX_multiple_cells}$;
- $T_{uncertainty_MAC} + T_{FineTiming}$, for any scenario where $T_{activation_time_multiple_cells}$ includes $T_{FineTiming}$.

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

Starting from the slot $n + \frac{T_{RRC_Process} + T_1}{NR\ slot\ length}$ until the UE has completed the direct SCell activation, the UE shall report CQI index = 0 (out of range) if the UE has available uplink resources to report CQI for the SCells.

8.3.10 Direct SCell Activation of Multiple Downlink SCells at Handover

The requirements in this clause apply for UE being configured in the RRC reconfiguration message, TS 38.331 [2], for handover with 2 SCells for which the parameter *sCellState* is set to *activated*.

In MCG of NE-DC, MCG of NR-DC, or in stand-alone NR, the requirements in this clause shall apply when the following conditions are met:

- UE does not receive any RRC reconfiguration message for direct activation of SCells within the activation period defined in this clause,
- there is no other SCell activation, deactivation, addition or release before direct activation is completed for all the SCells activated by the single RRC reconfiguration message in this clause, and
- in NE-DC, there is no E-UTRAN SCell activation, deactivation, addition or release before the direct activation of SCells in this clause is completed.

The UE shall configure the SCells in activated state upon successful completion of the RRC reconfiguration procedure within the specified delay. The UE shall be capable to transmit valid CSI report and apply actions for the directly activated SCells no later than in slot $n + \frac{N_{direct_multiple_cells}}{NR\ slot\ length}$ where:

- Slot n is the last slot overlapping with the PDSCH containing the RRC reconfiguration message,
- $N_{direct_multiple_cells} = T_{RRC_process} + T_{interrupt} + T_2 + T_3 + T_{activation_time_multiple_cells} + T_{CSI_Reporting} - 3ms$ for the cases specified in clause 8.3.7 that TCI state is not indicated within $T_{activation_time}$; otherwise, $N_{direct_multiple_cells} = T_{RRC_process} + T_{interrupt} + T_2 + T_3 + T_{HARQ} + T_{activation_time_multiple_cells} + T_{CSI_Reporting}$
- $T_{RRC_Process}$, $T_{interrupt}$, T_2 , and T_3 are specified in clause 8.3.5,
- T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3],
- $T_{activation_time_multiple_cells}$ and $T_{CSI_Reporting}$ are specified in clause 8.3.7, where the following definitions of $T_{FirstSSB}$, $T_{FirstSSB_MAX}$, and $T_{FirstSSB_MAX_multiple_cells}$ shall override the existing ones:

- $T_{FirstSSB}$, $T_{FirstSSB_MAX}$: as specified in clause 8.3.5,
- $T_{FirstSSB_MAX_multiple_scell}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot $n + \frac{T_{RRC_Process} + T_{interrupt} + T_2 + T_3}{NR\ slot\ length}$, further fulfilling:
 - In FR1, in case of intra-band SCell activation, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot; in case of inter-band SCell activation, the first occasion when the SCells being activated are transmitting SSB burst.
 - In FR2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS 38.321 [7] for an SCell at the first opportunities for the corresponding actions once the SCell is activated.

The UE may be allowed to cause interruptions to PCell during an interruption window, as specified in clause 8.2. The starting point of an interruption window on PCell shall not occur before slot $n+1 + \frac{T_{RRC\ Processing} + T_{interrupt} + T_2 + T_3}{NR\ slot\ length}$, and not occur after slot $n+1 + \frac{T_{RRC\ Processing} + T_{interrupt} + T_2 + T_3 + T_X}{NR\ slot\ length}$, where NR slot length is with respect to the numerology of the SCell being activated, and T_X is:

- $T_{FirstSSB}$, for any scenario where $T_{activation_time_multiple_scells}$ includes $T_{FirstSSB}$;
- $T_{FirstSSB_MAX}$, for any scenario where $T_{activation_time_multiple_scells}$ includes $T_{FirstSSB_MAX}$;
- $T_{FirstSSB_MAX_multiple_scell}$, for any scenario where $T_{activation_time_multiple_scells}$ includes $T_{FirstSSB_MAX_multiple_scells}$;
- $T_{uncertainty_MAC} + T_{FineTiming}$, for any scenario where $T_{activation_time_multiple_scells}$ includes $T_{FineTiming}$.

The length of the interruption window depends on the frequency band relation between the aggressor SCell and the victim PCell.

Starting from the slot $n + \frac{T_{RRC_Process} + T_{interrupt} + T_2 + T_3}{NR\ slot\ length}$ and until the UE has completed the direct SCell activation, the UE shall report CQI index = 0 (out of range) if the UE has available uplink resources to report CQI for the SCells.

8.3.11 Direct SCell Activation of Multiple Downlink SCells at RRC Resume

The requirements in this clause apply for UE being configured in the RRC reconfiguration message in TS38.331 [2] for RRC Resume with 2 SCells for which the parameter *sCellState* is set to *activated*.

The requirements in clause 8.3.9 shall apply, except that the definition of T_1 shall be replaced by the corresponding definition in clause 8.3.6.

8.3.12 SCell Activation Delay Requirement for Deactivated PUCCH SCell

The requirements in this clause shall apply for the UE configured with one downlink SCell and when PUCCH is configured for the SCell being activated.

configured for the SCell being activated.

If the UE has a valid TA for transmitting on an SCell then the UE shall be capable to transmit valid CSI report and apply actions related to the activation command for the SCell being activated on the PUCCH SCell no later than in slot $n + \frac{T_{HARQ} + T_{activation_time} + \max((T_{First_available_CSI} + T_{CSI_processing}), 3 * T_{target_PL-RS}) + T_{CSI_Reporting_after}}{NR\ slot\ length}$,

Where:

- A TA is considered to be valid provided that the *TimeAlignmentTimer* [2] associated with the TAG containing the PUCCH SCell is running.
- T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3].

- $T_{\text{activation_time}}$ is the SCell activation delay in millisecond as specified in section 8.3.2 except the definition of $T_{\text{uncertainty_MAC}}$ is replaced with:
 - $T_{\text{uncertainty_MAC}}$ is the time period between reception of the last activation command for PDCCH TCI, PDSCH TCI (when applicable), UL spatial relation (for FR2) relative to
 - SCell activation command for known case;
 - First valid L1-RSRP reporting for unknown case.
- $T_{\text{target_PL-RS}}$ is the periodicity of the target pathloss reference signal determined during PUCCH SCell activation.
- $T_{\text{First_available_CSI}}$ is the delay uncertainty (in ms) in acquiring the first available downlink CSI reference resource.
- $T_{\text{CSI_processing}}$ is the UE processing time for CSI reporting.
- $T_{\text{CSI_reporting_after}}$ is the delay uncertainty (in ms) in acquiring the first available CSI reporting resources after end of $\max((T_{\text{First_available_CSI}} + T_{\text{CSI_processing}}), 3 \cdot T_{\text{target_PL-RS}})$
- If the UE does not have a valid TA for transmitting on an SCell then the UE shall be capable to perform downlink actions related to the SCell activation command as specified in [7] for the SCell being activated on the PUCCH SCell no later than in slot $n + \frac{T_{\text{HARQ}} + T_{\text{activation_time}}}{\text{NR slot length}}$, and shall be capable to perform uplink actions related to the SCell activation command as specified in [7] for the SCell being activated on the PUCCH SCell no later than in slot $n + \frac{T_{\text{HARQ}} + T_{\text{delay_PUCCH_SCell}}}{\text{NR slot length}}$ and shall transmit valid CSI report for the SCell being activated on the PUCCH SCell no later than in slot $n + \frac{T_{\text{HARQ}} + T_{\text{delay_PUCCH_SCell}}}{\text{NR slot length}}$, where:

$$T_{\text{delay_PUCCH_SCell}} = T_{\text{activation_time}} + \max((T_{\text{First_available_CSI}} + T_{\text{CSI_processing}}), (T_1 + T_2 + T_3), 3 \cdot T_{\text{target_PL-RS}}) + T_{\text{CSI_reporting_after}}$$

Where:

- $T_{\text{activation_time}}$ is the SCell activation delay in millisecond as specified in section 8.3.2 except the definition of $T_{\text{uncertainty_MAC}}$ is replaced with:
 - $T_{\text{uncertainty_MAC}}$ is the time period between reception of the last activation command for PDCCH TCI, PDSCH TCI (when applicable), UL spatial relation (when applicable in FR2) relative to
 - SCell activation command for known case;
 - First valid L1-RSRP reporting for unknown case.
- $T_{\text{target_PL-RS}}$ is the periodicity of the target pathloss reference signal determined during PUCCH SCell activation.
- $T_{\text{First_available_CSI}}$ is the delay uncertainty (in ms) in acquiring the first available downlink CSI reference resource.
- $T_{\text{CSI_processing}}$ is the UE processing time for CSI reporting.
- $T_{\text{CSI_reporting_after}}$ is the delay uncertainty (in ms) in acquiring the first available CSI reporting resources after end of $\max((T_{\text{First_available_CSI}} + T_{\text{CSI_processing}}), (T_1 + T_2 + T_3), 3 \cdot T_{\text{target_PL-RS}})$
- T_1 is the delay uncertainty in acquiring the first available PDCCH triggered PRACH occasion in the PUCCH SCell after the slot $n + \frac{T_{\text{HARQ}} + T_{\text{activation_time}}}{\text{NR slot length}}$.
 - T_1 is up to the summation of a delay uncertainty for reception of PDCCH order, SSB to PRACH occasion association period and 10 ms, where SSB to PRACH occasion association period is defined in the table 8.1-1 of TS 38.213
- T_2 is the delay from slot $n + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_1}{\text{NR slot length}}$ until UE has obtained a valid TA command for the target PUCCH SCell being activated. Slot n is the slot where the UE receives PUCCH SCell activation command.
- T_3 is the delay for applying the received TA for uplink transmission on target PUCCH SCell being activated, as specified in clause 4.2 in TS 38.213.

The pathloss reference signal is known for known PUCCH SCell during activation if the following conditions are met during the period between the last transmission of the RS resource used for L3 RSRP measurement reporting and the completion of PUCCH SCell activation, where the RS resource is the target pathloss reference signal or QCLeD (with Type D) to the target pathloss reference signal:

- The PUCCH SCell activation command is received within 1280 ms upon the last transmission of the RS resource used for L3 measurement reporting
- The target pathloss reference signal determination is based on the latest L3 RSRP measurement reporting
- The target pathloss reference signal remains detectable during the PUCCH SCell activation period
 - SNR of the target pathloss reference signal $\geq -3\text{dB}$
- The associated SSBs with the target pathloss reference signal remain detectable during the PUCCH SCell activation period
 - SNR of the associated SSB $\geq -3\text{dB}$

The pathloss reference signal is known for unknown PUCCH SCell during activation if the following conditions are met during the period between the last transmission of the RS resource used for L1-RSRP measurement reporting and the completion of PUCCH SCell activation, where the RS resource is the target pathloss reference signal or QCLeD (with Type D) to the target pathloss reference signal.

- The PUCCH SCell activation command is received within 1280 ms upon the last transmission of the RS resource used for L1-RSRP measurement reporting
- The target pathloss reference signal determination is based on the latest L1-RSRP measurement reporting
- The target pathloss reference signal remains detectable during the PUCCH SCell activation period
 - SNR of the target pathloss reference signal $\geq -3\text{dB}$
- The associated SSBs with the target pathloss reference signal remain detectable during the PUCCH SCell activation period
 - SNR of the associated SSB $\geq -3\text{dB}$

Otherwise, the pathloss reference signal is unknown.

The above delay requirement shall apply provided that:

- The target pathloss reference signal determined during PUCCH SCell activation is known otherwise longer activation time is expected if the pathloss reference signal is unknown; and
- The RA on PUCCH SCell is not interrupted by the RA on PCell otherwise additional delay to activate the SCell is expected; and
- No SRS carrier based switching or SRS antenna port switching occurs during the SCell activation procedure otherwise the PUCCH SCell activation delay can be extended.

The starting point and the end-point of an interruption window on PCell or any activated SCell in MCG for NR standalone mode, or on PSCell or any activated SCell in SCG for EN-DC mode is the same as the interruption in single SCell activation requirement in clause 8.3.2.

In addition to the interruption due to RF retuning during PUCCH SCell activation, if the UE is not capable of *parallelTxPRACH-SRS-PUCCH-PUSCH*, and PRACH on PUCCH SCell and PUCCH/PUSCH/SRS on other active serving cell are fully or partially overlapping in time, the UE shall transmit PRACH on PUCCH SCell and is allowed to drop or cause interruption to SRS or PUCCH or PUSCH transmission on the SpCell or on any activated SCell. Otherwise, UE is not allowed to drop or cause any interruption to SRS or PUCCH or PUSCH transmission on SpCell or on any activated SCell.

For unknown PUCCH SCell activation in FR2, the requirement only apply when UE supports CSI reporting cross PUCCH group capability, and UE is configured with CSI reporting via SpCell. For unknown PUCCH SCell activation in FR1, the requirement only applies when UE supports CSI reporting cross PUCCH group capability, and UE is

configured with CSI reporting via SpCell, if 'ssb-PositionInBurst' indicates multiple SSBs but TCI state indication is not provided in same MAC PDU with SCell activation.

The requirement for unknown SCell applies provided that the PDCCH order (when applicable) and the activation commands for TCI, UL spatial relation and PL-RS (when applicable) are based on the latest valid L1-RSRP reporting via Primary PUCCH group.

8.3.13 SCell activation delay Requirement for Deactivated PUCCH SCell with Multiple SCells

The requirements in this clause shall apply for the UE configured with multiple deactivated downlink SCells and PUCCH is configured for a SCell, and when PUCCH SCell with downlink SCell(s) are activated by one MAC command.

For EN-DC, NE-DC, and standalone NR, the requirements in this clause shall apply when the following conditions are met:

- UE only receives one single MAC command for multiple SCell activation within the activation period defined in this clause
- in each single CG, there are no other SCell activation, deactivation, addition or release before activation is completed for all the SCells activated by the single MAC CE in this clause, and
- in EN-DC and NE-DC, there are no E-UTRAN SCell activation, deactivation, addition or release before multiple SCell activation is completed in this clause, and
- any to-be-activated unknown non-PUCCH SCell in a different band from to-be-activated PUCCH SCell has active serving cell(s) or known to-be-activated non-PUCCH SCell(s) on the same band.
- All DL SCells being activated in the secondary PUCCH group are unknown if PUCCH SCell being activated is unknown.
- If the to-be-activated FR2 PUCCH SCell is unknown, and there is no to-be-activated FR1 SCell which is counted in N1 as defined in 8.3.7.

Upon receiving SCell activation command in slot n for more than one SCell and one among the multiple SCells is PUCCH SCell, the UE shall be able to transmit valid CSI report on PUCCH SCell and apply actions related to the SCell activation command as specified in [7] for the PUCCH SCell being activated no later than in slot $n + T_{\text{activate_total_PUCCH_SCell}}$.

The UE shall be capable to transmit valid CSI report of other SCell no later than in slot $n + T_{\text{activate_total_other_SCell}}$.

Where:

- $T_{\text{activate_total_PUCCH_SCell}}$ is $\frac{T_{\text{HARQ}} + T_{\text{delay_multiple_SCells_PUCCH_SCell}}}{\text{NR slot length}}$,
- $T_{\text{activate_total_other_SCell}}$ is $\frac{T_{\text{HARQ}} + T_{\text{delay_multiple_SCells_other_SCell}}}{\text{NR slot length}}$

Where:

$T_{\text{delay_multiple_SCells_other_SCell}}$ is the SCell activation delay for other SCell when PUCCH SCell is activated with multiple SCells and is given by $T_{\text{activation_time_multiple_scells}} + T_{\text{CSI_Reporting}}$.

$T_{\text{delay_multiple_SCells_PUCCH_SCell}}$ is the SCell activation delay for PUCCH SCell when it is activated with multiple SCells and is given as below.

If UE has a Valid TA for transmitting on PUCCH SCell,

- A TA is considered to be valid provided that the *TimeAlignmentTimer* [2] associated with the TAG containing the PUCCH SCell is running.

$$T_{\text{delay_multiple_SCells_PUCCH_SCell}} = T_{\text{activation_time_multiple_scells}} + \max((T_{\text{First_available_CSI}} + T_{\text{CSI_processing}}), 3 \cdot T_{\text{target_PL-RS}}) + T_{\text{CSI_reporting_after}}$$

If UE does not have valid TA for PUCCH SCell,

$$T_{\text{delay_multiple_SCells_PUCCH_SCell}} = T_{\text{activation_time_multiple_scells}} + \max((T_{\text{First_available_CSI}} + T_{\text{CSI_processing}}), (T_1 + T_2 + T_3), 3 \cdot T_{\text{target_PL-RS}}) + T_{\text{CSI_reporting_after}}$$

Where:

- Otherwise, when the to-be-activated PUCCH SCell is FR2 unknown SCell, $T_{\text{activation_time_multiple_scells}}$ is equal to $T_{\text{activation_time}}$ as defined in 8.3.12; otherwise, $T_{\text{activation_time_multiple_scells}}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario as specified in section 8.3.7.
- $T_{\text{target_PL-RS}}$ is the periodicity of PL-RS resource when PL-RS of target PUCCH SCell is known
- $T_{\text{first_available_CSI}}$: the delay uncertainty in acquiring the first available downlink CSI reference resources for secondary PUCCH group.
- $T_{\text{CSI_processing}}$: the UE processing time for CSI reporting of secondary group PUCCH SCells.
- $T_{\text{CSI_reporting_after}}$ the delay uncertainty in acquiring the first available CSI reporting resource after end of $\max((T_{\text{First_available_CSI}} + T_{\text{CSI_processing}}), 3 \cdot T_{\text{target_PL-RS}})$ if UE has a valid TA for PUCCH SCell or after end of $\max((T_{\text{First_available_CSI}} + T_{\text{CSI_processing}}), (T_1 + T_2 + T_3), 3 \cdot T_{\text{target_PL-RS}})$ if UE does not have a valid TA for PUCCH SCell.

T_1 is the delay uncertainty in acquiring the first available PDCCH triggered PRACH occasion in the PUCCH SCell after $T_{\text{activation_time_multiple_scells}}$.

- T_1 is up to the summation of a delay uncertainty for reception of PDCCH order, SSB to PRACH occasion association period and 10 ms, where SSB to PRACH occasion association period is defined in the table 8.1-1 of TS 38.213
- T_2 is the delay from slot $n + (T_{\text{HARQ}} + T_{\text{activation_time_multiple_scells}} + T_1)/\text{NR slot length}$ until UE has obtained a valid TA command for the target PUCCH SCell being activated. Slot n is the slot where the UE receives PUCCH SCell activation command.
- T_3 is the delay for applying the received TA for uplink transmission on target PUCCH SCell being activated, and greater than or equal to $k+1$ slot, where k is defined in clause 4.2 in TS 38.213. The starting point and the endpoint of an interruption window on PCell or any activated SCell in MCG for NR standalone mode, or on PSCell or any activated SCell in SCG for EN-DC mode is same as single SCell activation requirement in clause 8.3.2.

Starting from slot $n + T_{\text{HARQ}} + 3$ ms where n is the slot where SCell activation command is received (as specified in clause 4.3 of TS 38.213 [3]) and until the SCell activation completion at UE, after at least one CSI-RS transmission occasion for the channel measurement and reporting (specified in clause 5.2.2.5 of TS 38.214 [26]), the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

In addition to the interruption due to RF retuning during multiple SCell activation, if the UE is not capable of *parallelTxPRACH-SRS-PUCCH-PUSCH* for inter-band CA, and PRACH on PUCCH SCell and PUCCH/PUSCH/SRS on other active serving cell are fully or partially overlapping in time, the UE shall transmit PRACH on PUCCH SCell and is allowed to drop or cause interruption to SRS or PUCCH or PUSCH transmission on the SpCell or on any activated SCell. Otherwise, UE is not allowed to drop or cause any interruption of SRS or PUCCH or PUSCH transmission on SpCell or on any activated SCell.

Upon receiving SCell activation command in slot n , if the start of the first complete SSB used in the T_x in the different bands which have SCells being activated after $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ are not aligned on time domain among

- SCells in different bands being activated by the same MAC CE if UE does not support per FR gap, or
- SCells in different FR1 bands being activated by the same MAC CE if UE supports per FR gap,

additional interruptions may be expected for the activated serving cells, where

- The number of additional interruptions is no more than the number of FR1 bands which have both SCell being activated for which the activation requirements involve $T_{\text{FirstSSB_MAX multiple_cells}}$ with T_{rs} and the active serving cell, and
- In each interruption occasion, the interruption length is defined in clause 8.2.2.2.2, and
- Longer activation delay may be expected for multiple SCell activation under one MAC CE with multiple interruptions, and
- T_X is:
 - T_{FirstSSB} , for any scenario where $T_{\text{activation_time multiple_cells}}$ includes T_{FirstSSB} ;
 - $T_{\text{FirstSSB_MAX multiple_cells}}$, for any scenario where $T_{\text{activation_time multiple_cells}}$ includes $T_{\text{FirstSSB_MAX multiple_cells}}$;
 - $T_{\text{uncertainty_MAC}} + T_{\text{FineTiming}}$ or $T_{\text{uncertainty_MAC multiple_cells}} + T_{\text{FineTiming}}$, for any scenario where $T_{\text{activation_time multiple_cells}}$ includes $T_{\text{FineTiming}}$.

Otherwise, no additional interruption is expected due to activation of multiple SCells.

Starting from the slot specified in clause 4.3 of TS 38.213 [3] (timing for secondary Cell activation/deactivation) and until the UE has completed a first L1-RSRP measurement, the UE shall report lowest valid L1 SS-RSRP range if the UE has available uplink resources to report L1-RSRP for the SCell.

8.3.14 SCell Deactivation Delay Requirement for Activated PUCCH SCell

The requirements in this clause shall apply for the UE configured with one SCell configured with PUCCH in EN-DC, or in standalone NR carrier aggregation, or in NE-DC.

Upon receiving PUCCH SCell deactivation command in slot n , the UE shall accomplish the deactivation actions for the PUCCH SCell being deactivated no later than in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$. The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2, shall not occur before slot $n+1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ and not occur after slot $n+1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, where NR slot length is with respect to the numerology used in the PUCCH SCell being deactivated.

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

8.3.15 SCell Deactivation Delay Requirement for Activated PUCCH SCell with Multiple Downlink SCells

The requirements in this clause shall apply for the UE configured with multiple downlink SCells and one SCell configured with PUCCH in EN-DC, or in standalone NR carrier aggregation, or in NE-DC, provided that,

- in each single CG, there are no other SCell activation, deactivation, addition or release before deactivation is completed for all the SCells deactivated by the single MAC CE in this clause, and
- in EN-DC and NE-DC, there are no E-UTRAN SCell activation, deactivation, addition or release before multiple SCell deactivation is completed in this clause, and
- in EN-DC, NE-DC and standalone NR, UE only receives one single MAC command for multiple SCell deactivation within the deactivation period defined in this clause

Upon receiving SCell deactivation command in slot n , the UE shall accomplish the deactivation actions for the SCells (including one SCell configured with PUCCH) being deactivated within the same delay as specified in clause 8.3.14.

The starting point and the end-point of an interruption window on PCell or any activated SCell in MCG for NR standalone mode, or on PSCell or any activated SCell in SCG for EN-DC mode are same as single SCell activation requirement in clause 8.3.14.

8.3.16 Fast SCell Activation Delay Requirement for Deactivated SCell

Aperiodic CSI-RS resources can be configured for fast SCell activation. The requirements in this clause shall apply for the UE configured with one downlink SCell in EN-DC, or in standalone NR carrier aggregation or in NE-DC or in NR-DC and when one SCell is being activated. The requirements in this clause shall apply for the UE provided with aperiodic CSI-RS resources for SCell activation for the target SCell.

Note: If UE is allocated A-TRS for fast SCell activation, the UE is not required to use the SSB of the target SCell.

The delay within which the UE shall be able to activate the deactivated SCell depends upon the specified conditions.

Upon receiving SCell activation command in slot n , the UE shall be capable to transmit valid CSI report and apply actions related to the activation command for the SCell being activated no later than in slot $n +$

$\frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, where:

T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3]

$T_{\text{activation_time}}$ is the SCell activation delay in millisecond.

If the SCell is known and belongs to FR1, $T_{\text{activation_time}}$ is:

- $T_{\text{FirstATRS}} + 5\text{ms}$, if the measurement period of the SCell being activated is equal to or smaller than 2400ms.
- $T_{\text{FirstATRS}} + T_{\text{gap}} + T_{\text{ATRS}} + 5\text{ms}$, if the measurement period of the SCell being activated is larger than 2400ms.

Note: The RSs on the activated serving cell in the same band are not required to be transmitted in the same slot as the temporary RS.

Note: UE may report inaccurate non-zero CQI for any activated Cell and being activated SCell during the fast SCell activation procedure only if the RSs on the activated serving cell in the same band are not transmitted in the same slot as the aperiodic CSI-RS for fast SCell activation.

If the SCell is unknown and belongs to FR1, and SCell is contiguous to an active serving cell in the same band, provided that the side condition $\hat{E}_s/\text{Iot} \geq -2\text{dB}$ is fulfilled, $T_{\text{activation_time}}$ is:

- $T_{\text{FirstATRS}} + T_{\text{gap}} + T_{\text{ATRS}} + 5\text{ms}$, if the following conditions are met,
 - the SCell is contiguous to an active serving cell in the same band, and
 - its *ssb-PositionInBurst* is same as the one of contiguous FR1 active serving cell, and
 - its SMTC offset is same as the one of contiguous FR1 active serving cell, and
 - its RTD with contiguous FR1 active serving cell is smaller than or equal to 260ns with respect to the to-be-activated SCell's SSB numerology, and its reception power difference with contiguous FR1 active serving cell is smaller than or equal to 6dB;

Note: The RSs on the activated serving cell in the same band are not required to be transmitted in the same slot as the temporary RS.

Note: UE may report inaccurate non-zero CQI for any activated SCell and being activated SCell during the fast SCell activation procedure only if the RSs on the activated serving cell in the same band are not transmitted in the same slot as the aperiodic CSI-RS for fast SCell activation.

If the SCell being activated belongs to FR2 and if there is at least one active serving cell on that FR2 band, then $T_{\text{activation_time}}$ is $T_{\text{FirstATRS}} + 5\text{ms}$ provided:

- The UE is provided with aperiodic CSI-RS resources for SCell activation for the target SCell, and

- The SSBs in the serving cell(s) and the SSBs in the SCell being activated fulfil the condition defined in clause 3.6.3, and
- The parameter *ssb-PositionsInBurst* is same for the serving cell(s) and the SCell, and
- SSB is in the same half-frame on the SCell and the FR2 active serving cell

If the SCell being activated belongs to FR2 and if there is no active serving cell on that FR2 band provided that PCell or PSCell is in FR1 or in FR2, and assuming PDCCH TCI and PDSCH TCI (when applicable) are associated with the triggered aperiodic CSI-RS resources for fast SCell activation, and when the following conditions are fulfilled:

- One of the candidate TCI states configured in TCI-StatesPDCCH-ToAddList has the same QCL source of the triggered A-TRS,
- The QCL source of CSI-RS for CQI reporting is the same as the triggered A-TRS,
- The TCI state for PDCCH/PDSCH is the same as A-TRS remain unchanged during SCell activation,
- If the target SCell belongs to FR2 is known to UE and semi-persistent CSI-RS is used for CSI reporting, then $T_{\text{activation_time}}$ is:
 - $3\text{ms} + \max(T_{\text{FirstATRS}} + 2\text{ms}, T_{\text{uncertainty_SP}})$, where $T_{\text{uncertainty_SP}}=0$ if UE receives the SCell activation command and semi-persistent CSI-RS activation command at the same time.
- If the target SCell belongs to FR2 is known to UE and periodic CSI-RS is used for CSI reporting, then $T_{\text{activation_time}}$ is:
 - $\max(T_{\text{FirstATRS}} + 5\text{ms}, T_{\text{uncertainty_RRC}} + T_{\text{RRC_delay}} - T_{\text{HARQ}})$.

where,

$T_{\text{FirstATRS}}$: is the time to the end of the first complete CSI-RS burst for SCell activation after slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{NR \text{ slot length}}$, where the CSI-RS burst is defined as four CSI-RS resources in two consecutive slots.

T_{ATRS} is the CSI-RS burst for SCell activation where the CSI-RS burst is defined as four CSI-RS resources in two consecutive slots.

T_{gap} is a gap length between two aperiodic CSI-RS bursts,

- at least 2 slots for 15kHz and 30kHz
- at least 3 slots for 60kHz

$T_{\text{uncertainty_RRC}}$ is the time period between reception of the RRC configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) relative to SCell activation command.

$T_{\text{uncertainty_SP}}$ is the time period between reception of the activation command for semi-persistent CSI-RS resource set for CQI reporting relative to SCell activation command for known case.

$T_{\text{RRC_delay}}$ is the RRC procedure delay as specified in TS38.331 [2].

$T_{\text{CSI_reporting}}$ is the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2].

SCell in FR1 is known if it has been meeting the following conditions:

- During the period equal to $\max(5 \cdot \text{measCycleSCell}, 5 \cdot \text{DRX cycles})$ for FR1 before the reception of the SCell activation command:
- the UE has sent a valid measurement report for the SCell being activated and

- the SSB measured remains detectable according to the cell identification conditions specified in clause 9.2 and 9.3.
- the SSB measured during the period equal to $\max(5 \cdot \text{measCycleSCell}, 5 \cdot \text{DRX cycles})$ also remains detectable during the SCell activation delay according to the cell identification conditions specified in clause 9.2 and 9.3.

Otherwise SCell in FR1 is unknown.

For the first SCell activation in FR2 bands, the SCell is known if it has been meeting the following conditions:

- During the period equal to 4s for UE supporting power class 1/5 and 3s for UE supporting power class 2/3/4 before UE receives the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and semi-persistent CSI-RS for CQI reporting (when applicable):
 - the UE has sent a valid L3-RSRP measurement report with SSB index
 - SCell activation command is received after L3-RSRP reporting and no later than the time when UE receives MAC-CE command for TCI activation
- During the period from L3-RSRP reporting to the valid CQI reporting, the reported SSBs with indexes remain detectable according to the cell identification conditions specified in clauses 9.2 and 9.3, and the TCI state is selected based on one of the latest reported SSB indexes.

Otherwise, the first SCell in FR2 band is unknown.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS 38.331 [2] for a SCell at the first opportunities for the corresponding actions once the SCell is activated.

The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2, shall not occur before slot $n+1+\frac{T_{\text{HARQ}}}{\text{NR slot length}}$ and not occur after slot $n+1+\frac{T_{\text{HARQ}}+3\text{ms}+T_X}{\text{NR slot length}}$, where NR slot length is with respect to the numerology used in the SCell being activated, and T_X is:

- $T_{\text{FirstATRS}}$, for any scenario where $T_{\text{activation_time}}$ includes $T_{\text{FirstATRS}}$;

The length of the interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

The requirements in this clause and requirements on interruption due to SCell activation in clause 8.x apply provided that the SSB and A-TRS of the to-be-activated SCell is within the first active DL BWP of the SCell.

Starting from slot $n + T_{\text{HARQ}} + 3 \text{ ms}$ where slot n is the slot where SCell activation command is received (as specified in clause 4.3 of TS 38.213 [3]) and until the SCell activation completion at UE, after at least one CSI-RS transmission occasion for the channel measurement and reporting (specified in clause 5.2.2.5 of TS 38.214 [26]), the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

8.3A SCell Activation and Deactivation Delay in Carriers with CCA

8.3A.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to activate a deactivated SCell operating with CCA and deactivate an activated SCell operating with CCA in EN-DC or in standalone NR carrier aggregation.

In the requirements of clause 8.3A, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding period; otherwise the SMTC occasion is considered as available at the UE.

In the requirements of clause 8.3A, the term CSI-RS occasion not available at the UE due to DL CCA failures refers to when the CSI-RS is configured by gNB for the UE but not available at the UE due to DL CCA failures at gNB during the corresponding period.

The requirements shall apply for EN-DC and standalone NR carrier aggregation.

8.3A.2 SCell Activation Delay Requirement for Deactivated SCell

The requirements in this clause shall apply for the UE configured with at least one downlink SCell operating with CCA in EN-DC or in standalone NR carrier aggregation and when one SCell operating with CCA is being activated but none of the RRC parameters *CO-DurationPerCell-r16*, *SlotFormatIndicator*, and *CSI-RS-ValidationWith-DCI-r16* is configured and all of the CSI reporting resources for being-activated SCell are available.

The delay within which the UE shall be able to activate the deactivated SCell depends upon the specified conditions.

Upon receiving SCell activation command in slot n , the UE shall be capable to transmit valid CSI report and apply actions related to the activation command for the SCell being activated no later than in slot $n + (T_{\text{HARQ}} + T_{\text{activation_time_withCCA}} + T_{\text{CSI_reporting_withCCA}})/\text{NR_slot_length}$, where:

- T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3]. In the event of UE not being able to transmit the acknowledgment due to UL CCA failures: T_{HARQ} is extended to also include the time to all next HARQ feedback transmission and retransmission opportunities, until the time of its successful transmission, as specified in TS 38.213 [3]; no extension of T_{HARQ} due to UL CCA failures is allowed for Type 2C UL channel access procedure as defined in TS 37.213 [57].
- $T_{\text{activation_time_withCCA}}$ is the SCell activation delay in millisecond.
 - If the SCell is known and belongs to FR1, $T_{\text{activation_time_withCCA}}$ is:
 - $T_{\text{FirstSSB}} + L_1 \cdot T_{\text{rs}} + 5\text{ms}$, if the measurement period of the SCell being activated is equal to or smaller than 2400ms.
 - $T_{\text{FirstSSB_MAX}} + L_{2,1} \cdot T_{\text{SMTC_MAX}} + (1 + L_{2,2}) \cdot T_{\text{rs}} + 5\text{ms}$, if the measurement period of the SCell being activated is larger than 2400ms.
 - If the SCell is unknown and belongs to FR1, provided that the side condition $\hat{E}_s/I_{\text{ot}} \geq -2$ dB is fulfilled and the SCell can be successfully detected in one attempt, $T_{\text{activation_time_withCCA}}$ is:
 - $T_{\text{FirstSSB_MAX}} + (1 + L_{3,1}) \cdot T_{\text{SMTC_MAX}} + (2 + L_{3,2}) \cdot T_{\text{rs}} + 5\text{ms}$.
 - If the SCell being activated belongs to FR2-2 and if there is at least one active serving cell on that FR2-2 band, if the UE supporting *cellWithoutSSB* is not provided with any SMTC for the target SCell, $T_{\text{activation_time_withCCA}}$ is 3 ms, provided
 - the RS (s) of SCell being activated is (are) QCL-TypeD with RS (s) of one active serving cell on that FR2-2 band.
 - If the SCell being activated belongs to FR2-2 and if there is no active serving cell on that FR2-2 band provided that PCell or PSCell is in FR1 or in FR2-2:
 - If the target SCell is known to UE and semi-persistent CSI-RS is used for CSI reporting, then $T_{\text{activation_time_withCCA}}$ is:
 - $3\text{ms} + \max(T_{\text{uncertainty_MAC}} + T_{\text{FineTiming}} + 2\text{ms}, T_{\text{uncertainty_SP}})$, where $T_{\text{uncertainty_MAC}}=0$ and $T_{\text{uncertainty_SP}}=0$ if:
 - UE receives the SCell activation command, semi-persistent CSI-RS activation command and TCI state activation command at the same time, or
 - Provided this is the initial activation after SCell addition, and
 - TCI-ActivatedConfig is configured for the SCell, and UE receives the SCell activation command and semi-persistent CSI-RS activation command at the same time.
 - If the target SCell is known to UE and periodic CSI-RS is used for CSI reporting, then $T_{\text{activation_time}}$ is:

- $\max(T_{\text{uncertainty_MAC}} + 5\text{ms} + T_{\text{FineTiming}}, T_{\text{uncertainty_RRC}} + T_{\text{RRC_delay}} - T_{\text{HARQ}})$, where $T_{\text{uncertainty_MAC}}=0$ if:
 - UE receives the SCell activation command and TCI state activation commands at the same time, or
 - Provided this is the initial activation after SCell addition, and
- UE receives the SCell activation command and TCI-ActivatedConfig is configured for the SCell.
- If the PCell/PSCell and the target SCell are configured as FR1-FR2-2 CA or if the PCell/PSCell and the target SCell are in a FR2-2 band pair with independent beam management, and the target SCell is unknown to UE and semi-persistent CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}_s/\text{Iot} \geq -2\text{dB}$ is fulfilled, then $T_{\text{activation_time_withCCA}}$ is:
 - $6\text{ms} + T_{\text{FirstSSB_MAX}} + (23+N*L_{4,1})*T_{\text{SMTC_MAX}} + (12+N*L_{4,2})*T_{\text{rs}} + T_{\text{L1-RSRP, measure}} + T_{\text{L1-RSRP, report}} + T_{\text{HARQ}} + \max(T_{\text{uncertainty_MAC}} + T_{\text{FineTiming}} + 2\text{ms}, T_{\text{uncertainty_SP}})$.
- If the PCell/PSCell and the target SCell are configured as FR1-FR2-2 CA or if the PCell/PSCell and the target SCell are in a FR2-2 band pair with independent beam management, and the target SCell is unknown to UE and periodic CSI-RS is used for CSI reporting, provided that the side condition $\hat{E}_s/\text{Iot} \geq -2\text{dB}$ is fulfilled, then $T_{\text{activation_time_withCCA}}$ is:
 - $3\text{ms} + T_{\text{FirstSSB_MAX}} + (23+N*L_{5,1})*T_{\text{SMTC_MAX}} + (12+N*L_{5,2})*T_{\text{rs}} + T_{\text{L1-RSRP, measure}} + T_{\text{L1-RSRP, report}} + \max\{(T_{\text{HARQ}} + T_{\text{uncertainty_MAC}} + 5\text{ms} + T_{\text{FineTiming}}), (T_{\text{uncertainty_RRC}} + T_{\text{RRC_delay}})\}$.

Where,

$T_{\text{SMTC_MAX}}$:

- In case of intra-band SCell activation, $T_{\text{SMTC_MAX}}$ is the longest SMTC periodicity between active serving cells and SCell being activated provided the cell specific reference signals from the active serving cells and the SCells being activated or released are available in the same slot;
- In case of inter-band SCell activation, $T_{\text{SMTC_MAX}}$ is the SMTC periodicity of SCell being activated;
- $T_{\text{SMTC_MAX}}$ is bounded to a minimum value of 10ms.

T_{rs} is the SMTC periodicity of the SCell being activated if the UE has been provided with an SMTC configuration for the SCell in SCell addition message, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement which involves T_{rs} is applied with $T_{\text{rs}} = 5\text{ms}$ assuming the SSB transmission periodicity is 5ms. There are no requirements if the SSB transmission periodicity is not 5ms

T_{FirstSSB} : is the time to the end of the first complete configured SSB burst indicated by the SMTC after slot $n + (T_{\text{HARQ}}+3\text{ms})/\text{NR_slot_length}$

$T_{\text{FirstSSB_MAX}}$: is the time to the end of first complete configured SSB burst indicated by the SMTC after slot $n + (T_{\text{HARQ}}+3\text{ms})/\text{NR_slot_length}$ when all active serving cells and SCells being activated or released have configured SSB bursts in the same slot for intra-band scenario. In case of inter-band SCell activation, $T_{\text{FirstSSB_MAX}}$ is the time to the end of the first complete configured SSB burst of the SCell being activated. In FR2-2, the occasion when all active serving cells and SCells being activated or released are transmitting SSB bursts in the same slot.

L_1 ($L_1 \leq L_{1,\text{max}}$) is the number of configured SMTC occasions not available at the UE. $L_{1,\text{max}} = 2$ if $T_{\text{rs}} \leq 40\text{ms}$; otherwise $L_{1,\text{max}} = 1$.

$L_{2,1}$ ($L_{2,1} \leq L_{2,1,\text{max}}$) and $L_{3,1}$ ($L_{3,1} \leq L_{3,1,\text{max}}$) are the numbers of configured SMTC occasions not available at the UE, for a known and unknown SCell activation respectively,

in the SCell being activated, for inter-band scenario, or

in any of the SCells already activated or being activated provided their cell specific reference signals are configured in the same slot, for intra-band scenario

and $L_{2,1,max} = 2$ if $T_{SMTC_MAX} \leq 40$ ms; otherwise $L_{2,1,max} = 1$. $L_{3,1,max} = 2$ if $T_{SMTC_MAX} \leq 40$ ms; otherwise $L_{3,1,max} = 1$.

$L_{2,2}$ ($L_{2,2} \leq L_{2,2,max}$) and $L_{3,2}$ ($L_{3,2} \leq L_{3,2,max}$) are the number of configured SMTC occasions not available at the UE in the SCell being activated. $L_{2,2,max} = 2$ if $T_{rs} \leq 40$ ms; otherwise $L_{2,2,max} = 1$. $L_{3,2,max} = 2$ if $T_{rs} \leq 40$ ms; otherwise $L_{3,2,max} = 1$.

$N = 12$ for an FR2-2 unknown SCell activation.

$L_{4,1}$ ($L_{4,1} \leq L_{4,1,max}$) and $L_{5,1}$ ($L_{5,1} \leq L_{5,1,max}$) are the numbers of SMTC occasions groups not available at the UE, for an FR2-2 unknown SCell activation,

in the SCell being activated, for inter-band scenario, or

in any of the SCells already activated or being activated provided their cell specific reference signals are configured in the same slot, for intra-band scenario

and $L_{4,1,max} = 2$ if $T_{SMTC_MAX} \leq 40$ ms; otherwise $L_{4,1,max} = 1$. $L_{5,1,max} = 2$ if $T_{SMTC_MAX} \leq 40$ ms; otherwise $L_{5,1,max} = 1$.

$L_{4,2}$ ($L_{4,2} \leq L_{4,2,max}$) and $L_{5,2}$ ($L_{5,2} \leq L_{5,2,max}$) are the number of SMTC occasions groups not available at the UE in the FR2-2 unknown SCell being activated. $L_{4,2,max} = 2$ if $T_{rs} \leq 40$ ms; otherwise $L_{4,2,max} = 1$. $L_{5,2,max} = 2$ if $T_{rs} \leq 40$ ms; otherwise $L_{5,2,max} = 1$.

$T_{FineTiming}$ is the time period between UE finish processing the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and the timing of first complete available SSB corresponding to the TCI state.

$T_{L1-RSRP, measure}$ is L1-RSRP measurement delay $T_{L1-RSRP_Measurement_Period_SSB_CCA}$ ms as defined in clause 9.5A.4.1 with the assumption of $M=1$.

$T_{L1-RSRP, report}$ is delay of acquiring CSI reporting resources.

$T_{uncertainty_MAC}$ is the time period between reception of the last activation command for PDCCH TCI, PDSCH TCI (when applicable) relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

$T_{uncertainty_RRC}$ is the time period between reception of the RRC configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

$T_{uncertainty_SP}$ is the time period between reception of the activation command for semi-persistent CSI-RS resource set for CQI reporting relative to

- SCell activation command for known case;
- First valid L1-RSRP reporting for unknown case.

T_{RRC_delay} is the RRC procedure delay as specified in TS38.331 [2].

Longer delays for RRM measurement requirements, and in case of FR2-2 also SSB based RLM/BFD/CBD/L1-RSRP measurement requirements, can be expected during the cell detection time for unknown SCell activation.

When *absoluteFrequencySSB* is not configured in *DownlinkConfigCommon* for target SCell but SMTC for target SCell is configured, no requirements apply.

$T_{CSI_reporting_withCCA} = T_{CSI_reporting} + T_{CSI_ReportingDelay}$, where

$T_{\text{CSI_reporting}}$ is the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2].

$T_{\text{CSI_ReportingDelay}}$ is the additional delay in transmission of CSI reporting due to UL CCA failures at the UE. If there are no uplink resources for reporting the valid CSI, then the UE shall use the next available opportunities for reporting the corresponding valid CSI as specified in TS 38.213 [3].

Upon exceeding any of the maximum numbers $L_{1,\text{max}}$, $L_{2,1,\text{max}}$, $L_{2,2,\text{max}}$, $L_{3,1,\text{max}}$, and $L_{3,2,\text{max}}$ of SMTC occasions or CSI-RS occasions, respectively, not available at the UE, the UE shall abandon the SCell activation procedure.

SCell operating with CCA in FR1 is known if it has been meeting the following conditions:

- During the period equal to $\max(5 \text{ measCycleSCell}, 5 \text{ DRX cycles})$ before the reception of the SCell activation command:
 - the UE has sent a valid measurement report for the SCell being activated and
 - the SSB measured remains detectable in the SMTC occasions available at the UE, according to the cell identification conditions specified in clause 9.2A and 9.3A.
- the SSB measured during the period equal to $\max(5 \text{ measCycleSCell}, 5 \text{ DRX cycles})$ also remains detectable - the SSB measured during the period equal to $\max(5 \text{ measCycleSCell}, 5 \text{ DRX cycles})$ also remains detectable in the SMTC occasions available at the UE during the SCell activation delay according to the cell identification conditions specified in clause 9.2A and 9.3A.

Otherwise SCell operating with CCA in FR1 is unknown.

For the first SCell activation with CCA in FR2-2 bands, the SCell is known if it has been meeting the following conditions:

- During the period equal to 4s for UE supporting power class 1/5 and 3s for UE supporting power class 2/3/4 before UE receives the last activation command for PDCCH TCI, PDSCH TCI (when applicable) and semi-persistent CSI-RS for CQI reporting (when applicable):
 - the UE has sent a valid L3-RSRP measurement report with SSB index
 - SCell activation command is received after L3-RSRP reporting and no later than the time when UE receives MAC-CE command for TCI activation
- During the period from L3-RSRP reporting to the valid CQI reporting, the reported SSBs with indexes remain detectable according to the cell identification conditions specified in clauses 9.2 and 9.3, and the TCI state is selected based on one of the latest reported SSB indexes.

Otherwise, the first SCell with CCA in FR2-2 band is unknown. The requirement for unknown SCell applies provided that the activation commands for PDCCH TCI, PDSCH TCI (when applicable), semi-persistent CSI-RS for CQI reporting (when applicable), and configuration message for TCI of periodic CSI-RS for CQI reporting (when applicable) are based on the latest valid L1-RSRP reporting.

If the UE has been provided with higher layer in TS 38.331 [2] signaling of *smtc2* prior to the activation command, $T_{\text{SMTC_SCell}}$ follows *smtc1* or *smtc2* according to the physical cell ID of the target cell being activated. $T_{\text{SMTC_MAX}}$ follows *smtc1* or *smtc2* according to the physical cell IDs of the target cells being activated and the active serving cells.

In addition to CSI reporting defined above, UE shall also apply other actions related to the activation command specified in TS 38.331 [2] for a SCell at the first opportunities for the corresponding actions once the SCell is activated.

For intra-band CA, the starting point of an interruption window on SpCell or any activated SCell as specified in clause 8.2, shall not occur before slot $n+1+\frac{T_{\text{HARQ}}}{\text{NR slot length}}$ and not occur after slot $n+1+\frac{T_{\text{HARQ}}+3+T_{\text{X}}}{\text{NR slot length}}$, where T_{X} is:

- T_{FirstSSB} , for known SCell activation when SCell measurement cycle is equal to or smaller than 160ms;
- $T_{\text{FirstSSB_MAX}} + L_{2,1} * T_{\text{SMTC_MAX}}$ for known SCell activation when SCell measurement cycle is greater than 160ms;
- $T_{\text{FirstSSB_MAX}} + L_{3,1} * T_{\text{SMTC_MAX}}$ for unknown SCell activation

For inter-band CA, the starting point of an interruption window on SpCell or any activated SCell as specified in clause 8.2, shall not occur before slot $n+1+\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot $n+1+\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$, where T_X is:

- $T_{FirstSSB}$, for known SCell activation when SCell measurement cycle is equal to, or smaller than, 160ms.

For intra-band CA,

- While the SCell being activated is known with measurement cycle equal to or smaller than 160ms, no more than one interruption is allowed during SCell activation.
- While the SCell being activated is known with measurement cycle greater than 160ms, up to $1+L_{2,1}$ interruptions are allowed during SCell activation,
- While the SCell being activated is unknown, up to $1+L_{3,1}$ interruptions are allowed during SCell activation. When $L_{3,1}>0$, performance degradation may be expected on any activated intra-band victim cells during the SCell activation
- For a single interruption ($L=0$), interruption window length at SCell activation does not depend on DL CCA failures.

For inter-band CA,

- For any active cell in the same band with the SCell being activated, the interruption requirements (i.e. number of interruptions and starting point of an interruption) for intra-band CA apply.
- For any active cell outside the band with the SCell being activated, a single interruption applies

The number of interruptions and length of each interruption window may be different for different victim cells and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell. For a single interruption ($L=0$), the interruption window length at SCell activation does not depend on DL CCA failures.

Starting from slot $n + T_{HARQ} + 3$ ms where slot n is the slot where SCell activation command is received (as specified in clause 4.3 of TS 38.213 [3]) and until the SCell activation completion at UE, after at least one CSI-RS transmission occasion for the channel measurement and reporting (specified in clause 5.2.2.5 of TS 38.214 [26]), the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

Starting from the slot specified in clause 4.3 of TS 38.213 [3] (timing for secondary Cell activation/deactivation) and until the UE has completed a first L1-RSRP measurement, the UE shall report lowest valid L1 SS-RSRP range if the UE has available uplink resources to report L1-RSRP for the SCell.

The requirements in this section do not apply when *sCellDeactivationTimer* [2] is not configured and when $T_{activation_time_withCCA}$ exceeds 1280 ms.

8.3A.3 SCell Deactivation Delay Requirement for Activated SCell

The requirements in this clause shall apply for the UE configured with at least one downlink SCell operating with CCA in EN-DC or in standalone NR carrier aggregation and one SCell is deactivated.

Upon receiving SCell deactivation command in slot n , the UE shall accomplish the deactivation actions for the SCell being deactivated no later than in slot $n+(T_{HARQ}+3ms)/NR_slot_length$. The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2, shall not occur before slot $n+1+\frac{T_{HARQ}}{NR\ slot\ length}$ and not occur after slot $n+1+\frac{T_{HARQ}+3ms}{NR\ slot\ length}$, where NR slot length is with respect to the numerology used in the SCell being deactivated.

Upon expiry of the *sCellDeactivationTimer* in slot n , the UE shall accomplish the deactivation actions for the SCell being deactivated no later than in slot $n + \frac{3ms}{NR\ slot\ length}$. The starting point of an interruption window on spCell or any activated SCell, as specified in clause 8.2, shall not occur before slot $n+1$ and not occur after slot $n+1+\frac{3ms}{NR\ slot\ length}$, where NR slot length is with respect to the numerology used in the SCell being deactivated. The length of the

interruption window may be different for different victim cells, and depends on the applicable scenario and on the frequency band relation between the aggressor cell and the victim cell.

The requirements in this section do not apply when *sCellDeactivationTimer* [2] is not configured and when SCell deactivation delay exceeds 1280 ms.

8.4 UE UL carrier RRC reconfiguration delay

8.4.1 Introduction

The requirements in this clause apply for a UE being configured or deconfigured with a supplementary UL carrier or NR UL carrier.

8.4.2 UE UL carrier configuration delay requirement

When the UE receives a RRC message implying NR UL or supplementary UL carrier configuration, the UE shall be ready to start transmission on the newly configured carrier within $T_{UL_carrier_config}$ from the end of slot n .

Where

- Slot n is the last slot overlapping with the PDSCH containing the RRC command.
- $T_{UL_carrier_config}$ equals the maximum RRC procedure delay defined in clause 11.2 in TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it equals the maximum RRC procedure delay defined in clause 12 in TS 38.331 [2].

8.4.3 UE UL carrier deconfiguration delay requirement

When the UE receives a RRC message implying NR UL or supplementary UL carrier deconfiguration RRC signalling, the UE shall stop UL signalling on the deconfigured UL carrier within $T_{UL_carrier_deconfig}$ from the end of slot n .

Where

- Slot n is the last slot overlapping with the PDSCH containing the RRC command.
- $T_{UL_carrier_deconfig}$ equals the maximum RRC procedure delay defined in clause 11.2 in TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it equals the maximum RRC procedure delay defined in clause 12 in TS 38.331 [2].

8.5 Link Recovery Procedures

8.5.1 Introduction

The UE shall assess the downlink radio link quality of a serving cell based on the reference signal in the set $\bar{q}_0$ as specified in TS 38.213 [3] in order to detect beam failure on:

- PCell in SA, NR-DC, or NE-DC operation mode,
- PSCell in NR-DC and EN-DC operation mode,
- SCell in SA, NR-DC, NE-DC or EN-DC operation mode,
- Deactivated PSCell in NR-DC and EN-DC operation mode

The RS resource configurations in the set $\bar{q}_0$ on PCell, PSCell or deactivated PSCell (if configured with *bfd-and-RLM* with value *true*) can be periodic CSI-RS resources and/or SSBs. RS resource configuration in the set $\bar{q}_0$ on SCell shall

be periodic CSI-RS. UE is not required to perform beam failure detection outside the active DL BWP. UE is not required to meet the requirements in clause 8.5.2 and 8.5.3 if UE does not have set $\bar{q}_b$. UE is not required to perform beam failure detection on a deactivated SCell, and also not required to perform beam failure detection on resources which is implicitly configured for a deactivated SCell. When more than 2 periodic CSI-RS resources on a CC are configured in the set $\bar{q}_b$ for current SCell or implicitly configured in the set $\bar{q}_b$ for other SCell, it is up to UE implementation to select two of CSI-RS resources in active BWP in current CC to perform beam failure detection. UE is not required to perform beam failure detection on a SCell on which $\bar{q}_l$ is not configured.

On each RS resource configuration in the set $\bar{q}_b$, the UE shall estimate the radio link quality and compare it to the threshold Q_{out_LR} for the purpose of accessing downlink radio link quality of the serving cell beams.

When a CORESET that the UE uses for monitoring PDCCH includes two TCI states and the UE is provided *sfnSchemePdcch* set to 'sfnSchemeA' or 'sfnSchemeB', the UE shall estimate a single downlink radio link quality to derive a single SNR and compare it to the single thresholds Q_{out_LR} for the purpose of accessing downlink radio link quality of the serving cell beams. How to compute the single SNR based on two active TCI states is up to UE implementation.

The threshold Q_{out_LR} is defined as the level at which the downlink radio level link of a given resource configuration on set $\bar{q}_b$ cannot be reliably received and shall correspond to the $BLER_{out} = 10\%$ block error rate of a hypothetical PDCCH transmission. For SSB based beam failure detection, $Q_{out_LR_SSB}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.5.2.1-1. For CSI-RS based beam failure detection, $Q_{out_LR_CSI-RS}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.5.3.1-1.

Upon request the UE shall deliver configuration indexes from the set $\bar{q}_l$ as specified in TS 38.213 [3], to higher layers, and the corresponding L1-RSRP measurement provided that the measured L1-RSRP is equal to or better than the threshold Q_{in_LR} , which is indicated by higher layer parameter *rsrp-ThresholdSSB*. The UE applies the Q_{in_LR} threshold to the L1-RSRP measurement obtained from an SSB. The UE applies the Q_{in_LR} threshold to the L1-RSRP measurement obtained for a CSI-RS resource after scaling a respective CSI-RS reception power with a value provided by higher layer parameter *powerControlOffsetSS*. The RS resource configurations in the set $\bar{q}_l$ can be periodic CSI-RS resources or SSBs or both SSB and CSI-RS resources. UE is not required to perform candidate beam detection outside the active DL BWP. UE is not required to perform candidate beam detection on a SCell on which $\bar{q}_l$ is not configured.

For a deactivated SCG, the UE may be provided via an RRC reconfiguration message with *tci-info* for PDCCH/PDSCH reception at the transition from deactivated SCG to activated SCG while the SCG is deactivated. After the reception of the RRC reconfiguration message the UE shall perform the BFD on the PSCell of the deactivated SCG using the TCI states according to *tci-info* specified in clause 6.3.2 in TS38.331[2].

8.5.1.1 Introduction of Requirement on Link Recovery Procedures for UE configured with relaxed measurement criteria

For the UE supports *bfd-Relaxation-r17* and configured with dedicated signaling *goodServingCellEvaluationBFD*, which is always configured to the UE when the network enables BFD relaxation for the UE as specified in TS 38.331[2], the relaxed requirements defined in clause 8.5.2.4 for SSB based beam failure detection and the relaxed requirements defined in clause 8.5.3.4 for CSI-RS based beam failure detection are allowed to apply to the relaxed BFD measurements on the serving cell after fulfilling the following conditions:

- for the serving cells in intra-band carrier aggregation configured with SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on SCell, when
- the good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the serving cell based on the measurements that are configured for SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on SCell in the intra-band carrier aggregation if the *lowMobilityEvaluationConnected* is not configured, or

- the UE is also configured with *lowMobilityEvaluationConnected* and both low mobility criterion defined in clause 5.7.13.1 of TS 38.331 [2] is fulfilled for a period of $T_{\text{SearchDeltaP-Connected}}$ and good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the serving cell based on the measurements that are configured for SSB-based or CSI-RS based RLM on SpCell together with CSI-RS based BFD on SCell in the intra-band carrier aggregation.
- for other serving cells, when
 - the good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the serving cell configured with BFD-RS if the *lowMobilityEvaluationConnected* is not configured, or
 - the UE is also configured with *lowMobilityEvaluationConnected*, and both low mobility criterion defined in clause 5.7.13.1 of TS 38.331 [2] is fulfilled for a period of $T_{\text{SearchDeltaP-Connected}}$ and good serving cell quality criterion defined in clause 5.7.13.2 of TS 38.331 [2] is fulfilled for the serving cell configured with BFD-RS.

otherwise, UE shall apply the requirements defined in clause 8.5.2.2 for SSB based beam failure detection and the requirements defined in clause 8.5.3.2 for CSI-RS based beam failure detection. Note that when multiple resources are configured on a serving cell for RLM or BFD evaluation, the good serving cell quality criterion is considered as fulfilled for the serving cell when any resource configured for the cell fulfills the good serving defined in clause 5.7.13.2 of TS 38.331 [2].

The scenario and RS resource configurations in the set $\bar{q}_0$ defined in section 8.5.1 apply for this section.

The UE is no longer allowed to relax BFD measurements and apply the relaxed link recovery procedures provided that at least one of the following conditions is met:

- The timer *beamFailureDetectionTimer* is running.
- No DRX is configured or configured DRX cycle is longer than 80ms

Note: Applicability of DRX configuration follows TS38.331 Clause 5.7.13.0.

8.5.2 Requirements for SSB based beam failure detection

8.5.2.1 Introduction

The requirements in this clause apply for each SSB resource in the set $\bar{q}_0$ configured for a serving cell, provided that the SSB configured for beam failure detection is actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.5.2.2. The requirements in this clause could not be applicable if UE is required to perform beam failure detection on more than 1 serving cell per band.

Table 8.5.2.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	Same as the SCS of RMSI CORESET
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.5.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in set $\bar{Q}_0$ estimated over the last $T_{\text{Evaluate_BFD_SSB}}$ ms period becomes worse than the threshold $Q_{\text{out_LR_SSB}}$ within $T_{\text{Evaluate_BFD_SSB}}$ ms period.

The value of $T_{\text{Evaluate_BFD_SSB}}$ is defined in Table 8.5.2.2-1 or Table 8.5.2.2-4 (deactivated PSCell) for FR1.

The value of $T_{\text{Evaluate_BFD_SSB}}$ is defined in Table 8.5.2.2-2 or Table 8.5.2.2-5 (deactivated PSCell) for FR2 with scaling factor $N=8$ for FR2-1 and $N=12$ for FR2-2, for FR2 power classes other than power class 6 or for FR2 power class 6 when *highSpeedMeasFlagFR2-r17* is not configured.

The value of $T_{\text{Evaluate_BFD_SSB}}$ is defined in Table 8.5.2.2-3 for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*.

For a UE supporting *concurrentMeasGap-r17* and when concurrent gaps are configured,

- P value for a BFD-RS resource to be measured is defined as
 - $N_{\text{total}} / N_{\text{outside_MG}}$ in FR1
 - $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ in FR2 with $N_{\text{available}} = 0$
 - $N_{\text{total}} / N_{\text{available}}$ in FR2 with $N_{\text{available}} > 0$
- For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any BFD-RS resource occasion:
 - N_{total} is the total number of BFD-RS resource occasions within the window W, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
 - $N_{\text{outside_MG}}$ is the number of BFD-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
 - $N_{\text{available}}$ is the number of BFD-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W
 - T_{L1} is periodicity of the target BFD-RS.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{xRP}}$, when in the monitored cell there are GAPS configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB.
- $P=1$ when in the monitored cell there are no GAPS overlapping with any occasion of the SSB.

For FR2

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when BFD-RS resource is not overlapped with GAPS and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$).
- $P = P_{\text{sharing factor}}$, when the BFD-RS resource is not overlapped with GAP and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{xRP} - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when the BFD-RS resource is partially overlapped with GAP and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with GAP and
 - $T_{\text{SMTCperiod}} \neq xRP$ or
 - $T_{\text{SMTCperiod}} = xRP$ and $T_{\text{SSB}} < 0.5 * T_{\text{SMTCperiod}}$

- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{xRP}}$, when the BFD-RS resource is partially overlapped with GAP and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with GAP and $T_{\text{SMTCperiod}} = xRP$ and $T_{\text{SSB}} = 0.5 * T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\text{Min}(xRP, T_{\text{SMTCperiod}})}}$, when the BFD-RS resource is partially overlapped with GAP ($T_{\text{SSB}} < xRP$) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with GAP.
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{xRP}}$, when the BFD-RS resource is partially overlapped with GAP and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with GAP ($T_{\text{SMTCperiod}} < xRP$)

where,

- $P_{\text{sharing factor}} = 1$, if the BFD-RS resource outside gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
 - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{\text{sharing factor}} = 3$, otherwise.
- If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc1*. $T_{\text{SMTCperiod}}$ is the shortest SMTC period among all CCs in the same FR2 band, given the SMTC offset of all CCs in FR2 provided the same offset.
- When a measurement gap is configured and the measurement gap is not NCSG,
 - a BFD-RS resource or an SMTC occasion is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and
 - $xRP = \text{MGRP}$
- Otherwise, when NCSG measurement gap is configured,
 - a BFD-RS resource or an SMTC occasion is considered to be overlapped with the GAP if
 - it overlaps the VIL1 or VIL2 of NCSG, or
 - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,
 - and
 - $xRP = \text{VIRP}$
- If the UE is configured with Pre-MG, a BFD-RS resource or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.
- When concurrent gaps are configured, a BFD-RS resource or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to clause 9.1.8.

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTC occasion and GAP configurations does not meet previous conditions. For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

Table 8.5.2.2-1: Evaluation period $T_{\text{Evaluate_BFD_SSB}}$ for FR1

Configuration	$T_{\text{Evaluate_BFD_SSB}}$ (ms)
no DRX	$\text{Max}(50, \text{Ceil}(5 \times P) \times T_{\text{SSB}})$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(50, \text{Ceil}(7.5 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times P) \times T_{\text{DRX}}$
Note: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.	

Table 8.5.2.2-2: Evaluation period $T_{\text{Evaluate_BFD_SSB}}$ for FR2

Configuration	$T_{\text{Evaluate_BFD_SSB}}$ (ms)
no DRX	$\text{Max}(50, \text{Ceil}(5 \times P \times N) \times T_{\text{SSB}})$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(50, \text{Ceil}(7.5 \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times P \times N) \times T_{\text{DRX}}$
Note: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.	

Table 8.5.2.2-3: Evaluation period $T_{\text{Evaluate_BFD_SSB}}$ for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*

Configuration	$T_{\text{Evaluate_BFD_SSB}}$ (ms)
no DRX	$\text{Max}(50, \text{Ceil}(5 \times P \times N^{\text{Note2}}) \times T_{\text{SSB}})$
DRX cycle $\leq 80\text{ms}$	$\text{Max}(50, \text{Ceil}(7.5 \times P \times N^{\text{Note2}}) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
Note 1: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.	
Note 2: scaling factor $N=2$ when <i>highSpeedMeasFlagFR2-r17</i> is configured to set1 or scaling factor $N=6$ when <i>highSpeedMeasFlagFR2-r17</i> is configured to set2.	

Table 8.5.2.2-4: Evaluation period $T_{\text{Evaluate_BFD_SSB}}$ for deactivated PSCell in FR1

Configuration	$T_{\text{Evaluate_BFD_SSB}}$ (ms)
no DRX	$\text{Ceil}(5 \times P) \times \text{measCyclePscell}$
DRX cycle $\leq 320\text{ms}$	$\text{Ceil}(7.5 \times P) \times \text{Max}(\text{measCyclePscell}, T_{\text{DRX}})$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times P) \times \text{Max}(\text{measCyclePscell}, T_{\text{DRX}})$
Note: DRX cycle is the configured DRX cycle of the PSCell. measCyclePSCell is the measurement cycle length of the deactivated PSCell.	

Table 8.5.2.2-5: Evaluation period $T_{\text{Evaluate_BFD_SSB}}$ for deactivated PSCell in FR2

Configuration	$T_{\text{Evaluate_BFD_SSB}}$ (ms)
no DRX	$\text{Ceil}(5 \times P \times N) \times \text{measCyclePscell}$
DRX cycle $\leq 320\text{ms}$	$\text{Ceil}(7.5 \times P \times N) \times \text{Max}(\text{measCyclePscell}, T_{\text{DRX}})$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times P \times N) \times \text{Max}(\text{measCyclePscell}, T_{\text{DRX}})$
Note: DRX cycle is the configured DRX cycle of the PSCell. measCyclePSCell is the measurement cycle length of the deactivated PSCell.	

8.5.2.3 Measurement restriction for SSB based beam failure detection

The UE is required to be capable of measuring SSB for BFD without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB OFDM symbols used for BFD measurement fully or partially overlap with CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for BFD measurement without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for BFD measurement without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

For FR2, when the SSB for BFD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

For FR2, when the SSB for BFD measurement on one CC is in the same or adjacent OFDM symbol as SSB from cell with additional PCI for L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSBs. Longer measurement period for SSB based BFD is expected, and no requirements are defined.

For FR2, if the network configures same or mixed numerology between SSB for BFD measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, UE shall be able to perform the related SSB based measurements in one band without any measurement restrictions on the other band, provided that UE is capable of independent beam management on this FR2 band pair.

8.5.2.4 Minimum requirement of SSB based beam failure detection for UE fulfilling relaxed measurement criteria

This clause contains minimum requirements for SSB based relaxed beam failure detection.

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in set $\bar{Q}_h$ estimated over the last $T_{\text{Evaluate_BFD_SSB_Relax}}$ ms period becomes worse than the threshold $Q_{\text{out_LR_SSB}}$ within $T_{\text{Evaluate_BFD_SSB_Relax}}$ ms period.

The value of $T_{\text{Evaluate_BFD_SSB_Relax}}$ is defined in Table 8.5.2.4-1 for FR1.

The value of $T_{\text{Evaluate_BFD_SSB_Relax}}$ is defined in Table 8.5.2.4-2 for FR2 with scaling factor $N=8$

The value of P is defined in clause 8.5.2.2.

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

Table 8.5.2.4-1: Evaluation period $T_{\text{Evaluate_BFD_SSB_Relax}}$ for FR1

Configuration	$T_{\text{Evaluate_BFD_SSB_Relax}}$ (ms)
---------------	---

$\text{Max}(T_{\text{DRX}}, T_{\text{SSB}}) \leq 80 \text{ ms}$	$\text{Max}(50 \times K3, \text{Ceil}(7.5 \times K1 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
$80\text{ms} < \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}) \leq 160 \text{ ms}$	$\text{Max}(50, \text{Ceil}(7.5 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
Note 1: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length and no longer than 80ms. Note 2: $K1$ is the relaxation factor. $K1 = 2$ for $40\text{ms} < \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}) \leq 80 \text{ ms}$, $K1 = 4$ for $\text{Max}(T_{\text{DRX}}, T_{\text{SSB}}) \leq 40 \text{ ms}$ Note 3: $K3$ is the relaxation factor for the lower bound. $K3 = K1$, if $1 < K1 \leq 2$; $K3 = 1$ otherwise.	

Table 8.5.2.4-2: Evaluation period $T_{\text{Evaluate_BFD_SSB_Relax}}$ for FR2

Configuration	$T_{\text{Evaluate_BFD_SSB_Relax}}$ (ms)
$\text{Mas}(T_{\text{DRX}}, T_{\text{SSB}}) \leq 80 \text{ ms}$	$\text{Max}(50 \times K4, \text{Ceil}(7.5 \times K2 \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
$80\text{ms} < \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}) \leq 160 \text{ ms}$	$\text{Max}(50, \text{Ceil}(7.5 \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
Note 1: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length and no longer than 80ms. Note 2: $K2$ is the relaxation factor. $K2 = 2$. Note 3: $K4$ is the relaxation factor for the lower bound. $K4 = K2$, if $1 < K2 \leq 2$; $K4 = 1$ otherwise.	

8.5.3 Requirements for CSI-RS based beam failure detection

8.5.3.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the set $\bar{q}_0$ of resource configurations for a serving cell, provided that the CSI-RS resource(s) in set $\bar{q}_0$ for beam failure detection are actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.5.3.2. UE is not expected to perform beam failure detection measurements on the CSI-RS configured for BFD if the CSI-RS is not QCL-ed, with QCL-TypeD when applicable, with the RS in the active TCI state of any CORESET configured in the UE active BWP. The requirements in this clause apply when UE is required to perform beam failure detection on no more than 1 serving cell per band.

Table 8.5.3.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.5.3.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in set $\bar{q}_0$ estimated over the last $T_{\text{Evaluate_BFD_CSI-RS}}$ ms period becomes worse than the threshold $Q_{\text{out_LR_CSI-RS}}$ within $T_{\text{Evaluate_BFD_CSI-RS}}$ ms period.

The value of $T_{\text{Evaluate_BFD_CSI-RS}}$ is defined in Table 8.5.3.2-1 or Table 8.5.3.2-3 (deactivated PSCell) for FR1.

The value of $T_{\text{Evaluate_BFD_CSI-RS}}$ is defined in Table 8.5.3.2-2 or Table 8.5.3.2-4 (deactivated PSCell) for FR2 with $N=1$. The requirements of $T_{\text{Evaluate_BFD_CSI-RS}}$ apply provided that the CSI-RS for BFD is not in a resource set configured with repetition ON. The requirements shall not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for BFD and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

For a UE supporting *concurrentMeasGap-r17* and when concurrent gaps are configured,

- P value for a BFD-RS resource to be measured is defined as
 - $N_{\text{total}} / N_{\text{outside_MG}}$ in FR1
 - $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ in FR2 with $N_{\text{available}} = 0$
 - $N_{\text{total}} / N_{\text{available}}$ in FR2 with $N_{\text{available}} > 0$
- For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any BFD-RS resource occasion:
 - N_{total} is the total number of BFD-RS resource occasions within the window W, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
 - $N_{\text{outside_MG}}$ is the number of BFD-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
 - $N_{\text{available}}$ is the number of BFD-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W

T_{L1} is periodicity of the target BFD-RS.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{xRP}}$, when in the monitored cell there are GAPS configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS.
- $P = 1$ when in the monitored cell there are no GAPS overlapping with any occasion of the CSI-RS.

For FR2,

- $P = 1$, when the BFD-RS resource is not overlapped with GAP and also not overlapped with SMTC occasion.
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{xRP}}$, when the BFD-RS resource is partially overlapped with GAP and the BFD-RS resource is not overlapped with SMTC occasion ($T_{\text{CSI-RS}} < xRP$)
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when the BFD-RS resource is not overlapped with GAP and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$).
- $P = P_{\text{sharing factor}}$, when the BFD-RS resource is not overlapped with GAP and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{xRP} - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when the BFD-RS resource is partially overlapped with GAP and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with GAP and
 - $T_{\text{SMTCperiod}} \neq xRP$ or
 - $T_{\text{SMTCperiod}} = xGRP$ and $T_{\text{CSI-RS}} < 0.5 \times T_{\text{SMTCperiod}}$

- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{xRP}}$, when the BFD-RS resource is partially overlapped with GAP and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with GAP and $T_{\text{SMTCperiod}} = xRP$ and $T_{\text{CSI-RS}} = 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\min(xRP, T_{\text{SMTCperiod}})}}$, when the BFD-RS resource is partially overlapped with GAP ($T_{\text{CSI-RS}} < xRP$) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with GAP.
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{xRP}}$, when the BFD-RS resource is partially overlapped with GAP and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with GAP ($T_{\text{SMTCperiod}} < xRP$)

where,

- $P_{\text{sharing factor}} = 1$, if the BFD-RS resource outside gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
 - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{\text{sharing factor}} = 3$, otherwise.
- If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc1*. $T_{\text{SMTCperiod}}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.
- When a measurement gap is configured and the measurement gap is not NCSG,
 - a BFD-RS resource or an SMTC occasion is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and
 - $xRP = \text{MGRP}$
- Otherwise, when NCSG measurement gap is configured,
 - a BFD-RS resource or an SMTC occasion is considered to be overlapped with the GAP if
 - it overlaps the VIL1 or VIL2 of NCSG, or
 - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,
 - and
 - $xRP = \text{VIRP}$
- If the UE is configured with Pre-MG, a BFD-RS resource or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.
- When concurrent gaps are configured, a BFD-RS resource or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to clause 9.1.8.

Note: The overlap between CSI-RS for BFD and SMTC means that CSI-RS for BFD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the BFD-RS resource, SMTC occasion and GAP configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

The values of M_{BFD} used in Table 8.5.3.2-1 and Table 8.5.3.2-2 are defined as

- $M_{\text{BFD}} = 10$, if the CSI-RS resource(s) in set $\bar{q}_0$ used for BFD is transmitted with Density = 3 and over the bandwidth ≥ 24 PRBs.

The values of P_{BFD} used in Table 8.5.3.2-1 and Table 8.5.3.2-2 are defined as

For each CSI-RS resource in the set $\bar{q}_0$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- $P_{\text{BFD}} = 1$.

For each CSI-RS resource in the set $\bar{q}_0$ configured for PSCell in NR-DC

- $P_{\text{BFD}} = 2$ if UE is configured for beam failure detection on SCell, 1 otherwise.

For each CSI-RS resource in the set $\bar{q}_0$ configured for a SCell

- $P_{\text{BFD}} = Z$ in EN-DC or NE-DC or SA.
- $P_{\text{BFD}} = 2 * Z$ in NR-DC.
- Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell.

Table 8.5.3.2-1: Evaluation period $T_{\text{Evaluate_BFD_CSI-RS}}$ for FR1

Configuration	$T_{\text{Evaluate_BFD_CSI-RS}}$ (ms)
no DRX	$\text{Max}(50, \text{Ceil}(M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times T_{\text{CSI-RS}})$
DRX cycle ≤ 320 ms	$\text{Max}(50, \text{Ceil}(1.5 \times M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
DRX cycle > 320 ms	$\text{Ceil}(M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times T_{\text{DRX}}$
Note: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.	

Table 8.5.3.2-2: Evaluation period $T_{\text{Evaluate_BFD_CSI-RS}}$ for FR2

Configuration	$T_{\text{Evaluate_BFD_CSI-RS}}$ (ms)
no DRX	$\text{Max}(50, \text{Ceil}(M_{\text{BFD}} \times P \times N \times P_{\text{BFD}}) \times T_{\text{CSI-RS}})$
DRX cycle ≤ 320 ms	$\text{Max}(50, \text{Ceil}(1.5 \times M_{\text{BFD}} \times P \times N \times P_{\text{BFD}}) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
DRX cycle > 320 ms	$\text{Ceil}(M_{\text{BFD}} \times P \times N \times P_{\text{BFD}}) \times T_{\text{DRX}}$
Note: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.	

Table 8.5.3.2-3: Evaluation period $T_{\text{Evaluate_BFD_CSI-RS}}$ for deactivated PSCell in FR1

Configuration	$T_{\text{Evaluate_BFD_CSI-RS}}$ (ms)
no DRX	$\text{Ceil}(M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times \text{measCyclePscell}$
DRX cycle ≤ 320 ms	$\text{Ceil}(1.5 \times M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePscell})$
DRX cycle > 320 ms	$\text{Ceil}(M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePscell})$

Note: DRX cycle is the configured DRX cycle of the PSCell. measCyclePSCell is the measurement cycle length of the deactivated PSCell.

Table 8.5.3.2-4: Evaluation period $T_{\text{Evaluate_BFD_CSI-RS}}$ for deactivated PSCell in FR2

Configuration	$T_{\text{Evaluate_BFD_CSI-RS}}$ (ms)
no DRX	$\text{Ceil}(M_{\text{BFD}} \times P \times N \times P_{\text{BFD}}) \times \text{measCyclePscell}$
DRX cycle $\leq 320\text{ms}$	$\text{Ceil}(1.5 \times M_{\text{BFD}} \times P \times N \times P_{\text{BFD}}) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePscell})$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(M_{\text{BFD}} \times P \times N \times P_{\text{BFD}}) \times \text{Max}(T_{\text{DRX}}, \text{measCyclePscell})$
Note: DRX cycle is the configured DRX cycle of the PSCell. measCyclePSCell is the measurement cycle length of the deactivated PSCell.	

8.5.3.3 Measurement restrictions for CSI-RS beam failure detection

The SSB mentioned in this clause can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

The UE is required to be capable of measuring CSI-RS for BFD without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following scenarios.

For both FR1 and FR2, when the CSI-RS for BFD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for BFD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for BFD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

For FR2, when the CSI-RS for BFD measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD or L1-RSRP measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for BFD measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for BFD measurement and the other CSI-RS. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.
 - The CSI-RS for BFD measurement or the other CSI-RS in a resource set configured with repetition ON, or
 - The other CSI-RS is configured in set $\bar{q}_l$ and beam failure is detected, or
 - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

8.5.3.4 Minimum requirement of CSI-RS based beam failure detection for UE fulfilling relaxed measurement criteria

This clause contains the minimum requirements for CSI-RS based relaxed beam failure detection.

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in set $\bar{q}_0$ estimated over the last $T_{\text{Evaluate_BFD_CSI-RS_Relax}}$ ms period becomes worse than the threshold $Q_{\text{out_LR_CSI-RS}}$ within $T_{\text{Evaluate_BFD_CSI-RS_Relax}}$ ms period.

The value of $T_{\text{Evaluate_BFD_CSI-RS_Relax}}$ is defined in Table 8.5.3.4-1 for FR1.

The value of $T_{\text{Evaluate_BFD_CSI-RS_Relax}}$ is defined in Table 8.5.3.4-2 for FR2 with $N=1$.

The values of P , M_{BFD} and P_{BFD} is defined in clause 8.5.3.2.

Longer evaluation period would be expected if the combination of RLM-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{Identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{Identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

Table 8.5.3.4-1: Evaluation period $T_{\text{Evaluate_BFD_CSI-RS_Relax}}$ for FR1

Configuration	$T_{\text{Evaluate_BFD_CSI-RS_Relax}}$ (ms)
$\text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}) \leq 80$ ms	$\text{Max}(50 \times K3, \text{Ceil}(K1 \times 1.5 \times M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
Note 1: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length and no longer than 80ms.	
Note 2: $K1$ is the relaxation factor. $K1 = 2$ for $40 \text{ ms} < \text{MAX}(T_{\text{DRX}}, T_{\text{CSI-RS}}) \leq 80 \text{ ms}$, $K1 = 4$ for $\text{MAX}(T_{\text{DRX}}, T_{\text{CSI-RS}}) \leq 40 \text{ ms}$	
Note 3: $K3$ is the relaxation factor for the lower bound. $K3 = K1$, if $1 < K1 \leq 2$; $K3 = 1$ otherwise.	

Table 8.5.3.4-2: Evaluation period $T_{\text{Evaluate_BFD_CSI-RS_Relax}}$ for FR2

Configuration	$T_{\text{Evaluate_BFD_CSI-RS_Relax}}$ (ms)
$\text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}) \leq 80$ ms	$\text{Max}(50 \times K4, \text{Ceil}(K2 \times 1.5 \times M_{\text{BFD}} \times P \times N \times P_{\text{BFD}}) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
Note 1: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length and no longer than 80ms.	
Note 2: $K2$ is the relaxation factor. $K2 = 2$	
Note 3: $K4$ is the relaxation factor for the lower bound. $K4 = K2$, if $1 < K2 \leq 2$; $K4 = 1$ otherwise.	

8.5.4 Minimum requirement for L1 indication

When the radio link quality on all the RS resources in set $\bar{q}_0$ is worse than $Q_{\text{out_LR}}$, layer 1 of the UE shall send a beam failure instance indication to the higher layers

The beam failure instance evaluation for the RS resources in set $\bar{q}_0$ shall be performed as specified in clause 6 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{\text{Indication_interval_BFD}}$.

When DRX is not used, $T_{\text{Indication_interval_BFD}}$ is $\text{max}(2\text{ms}, T_{\text{SSB-RS,M}})$ or $\text{max}(2\text{ms}, T_{\text{CSI-RS,M}})$, where $T_{\text{SSB-RS,M}}$ and $T_{\text{CSI-RS,M}}$ is the shortest periodicity of all RS resources in set $\bar{q}_0$ for the accessed cell, corresponding to either the shortest periodicity of the SSB in the set $\bar{q}_0$ or CSI-RS resource in the set $\bar{q}_0$.

When DRX is used, for SSB based link quality measurement,

- $T_{\text{Indication_interval_BFD}} = \text{Max}(1.5 \times \text{DRX_cycle_length}, 1.5 \times T_{\text{SSB-RS,M}})$, if $\text{DRX_cycle_length} \leq 320\text{ms}$,
- $T_{\text{Indication_interval_BFD}} = \text{DRX_cycle_length}$, if $\text{DRX_cycle_length} > 320\text{ms}$.

When DRX is used, for CSI-RS based link quality measurement,

- $T_{\text{Indication_interval_BFD}} = \text{Max}(1.5 \times \text{DRX_cycle_length}, 1.5 \times T_{\text{CSI-RS,M}})$, if $\text{DRX_cycle_length} \leq 320\text{ms}$,
- $T_{\text{Indication_interval_BFD}} = \text{DRX_cycle_length}$, if $\text{DRX_cycle_length} > 320\text{ms}$.

For deactivated PSCell,

when DRX is not used, $T_{\text{Indication_interval_BFD}}$ is $\text{Max}(2\text{ms}, \text{measCyclePSCell})$.

when DRX is used, for SSB based link quality measurement,

- $T_{\text{Indication_interval_BFD}} = \text{Max}(1.5 \times \text{DRX_cycle_length}, 1.5 \times \text{measCyclePSCell})$, if $\text{DRX_cycle_length} \leq 320\text{ms}$,
- $T_{\text{Indication_interval_BFD}} = \text{Max}(\text{DRX_cycle_length}, \text{measCyclePSCell})$, if $\text{DRX_cycle_length} > 320\text{ms}$.

When DRX is used, for CSI-RS based link quality measurement,

- $T_{\text{Indication_interval_BFD}} = \text{Max}(1.5 \times \text{DRX_cycle_length}, 1.5 \times \text{measCyclePSCell})$, if $\text{DRX_cycle_length} \leq 320\text{ms}$,
- $T_{\text{Indication_interval_BFD}} = \text{Max}(\text{DRX_cycle_length}, \text{measCyclePSCell})$, if $\text{DRX_cycle_length} > 320\text{ms}$.

8.5.5 Requirements for SSB based candidate beam detection

8.5.5.1 Introduction

The requirements in this clause apply for each SSB resource in the set $\bar{q}_l$ configured for a serving cell, provided that the SSBs configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.5.5.2. The requirements in this clause apply when UE is required to perform candidate beam detection on no more than 1 serving cell per band.

8.5.5.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured SSB resource in set $\bar{q}_l$ estimated over the last $T_{\text{Evaluate_CBD_SSB}}$ ms period becomes better than the threshold $Q_{\text{in_LR}}$ provided SSB_{RP} and SSB $\hat{E}_s/I_{\text{ot}}$ are according to Annex Table B.2.4.1 for a corresponding band.

The UE shall monitor the configured SSB resources using the evaluation period in table 8.5.5.2-1 and 8.5.5.2-2 corresponding to the non-DRX mode, if the configured DRX cycle $\leq 320\text{ms}$.

The value of $T_{\text{Evaluate_CBD_SSB}}$ is defined in Table 8.5.5.2-1 for FR1.

The value of $T_{\text{Evaluate_CBD_SSB}}$ is defined in Table 8.5.5.2-2 for FR2 with scaling factor $N=8$ for FR2-1 and $N=12$ for FR2-2.

For a UE supporting concurrentMeasGap-r17 and when concurrent gaps are configured,

- P value for a CBD-RS resource to be measured is defined as
 - $N_{\text{total}} / N_{\text{outside_MG}}$ in FR1
 - $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ in FR2 with $N_{\text{available}} = 0$
 - $N_{\text{total}} / N_{\text{available}}$ in FR2 with $N_{\text{available}} > 0$
- For a window W of duration $\text{max}(T_{\text{L1}}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any CBD-RS resource occasion:

- N_{total} is the total number of CBD-RS resource occasions within the window W , including those overlapped with measurement gap occasions or SMTC occasions within the window W , and
- $N_{\text{outside_MG}}$ is the number of CBD-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{\text{available}}$ is the number of CBD-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W
- T_{L1} is periodicity of the target CBD-RS.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{xRP}}$, when in the monitored cell there are GAPS configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB,
- $P = 1$ when in the monitored cell there are no GAPS overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is not overlapped with GAP and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$).
- P is $P_{\text{sharing factor}}$, when candidate beam detection RS is not overlapped with GAP and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{xRP} - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with GAP and
 - $T_{\text{SMTCperiod}} \neq xRP$ or
 - $T_{\text{SMTCperiod}} = xRP$ and $T_{\text{SSB}} < 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{xRP}}$, when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with GAP and $T_{\text{SMTCperiod}} = xRP$ and $T_{\text{SSB}} = 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\min(xRP, T_{\text{SMTCperiod}})}}$, when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with GAP
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{xRP}}$, when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with GAP ($T_{\text{SMTCperiod}} < xRP$)

where,

- $P_{\text{sharing factor}} = 1$, if the CBD-RS resource outside gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

- not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{\text{sharing factor}} = 3$, otherwise.
- If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{\text{SMTCPERIOD}}$ follows *smtc2*; Otherwise $T_{\text{SMTCPERIOD}}$ follows *smtc1*. $T_{\text{SMTCPERIOD}}$ is the shortest SMTc period among all CCs in the same FR2 band, provided the SMTc offset of all CCs in FR2 have the same offset.
- If the UE is configured with Pre-MG, a CBD-RS resource or an SMTc occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.
- When a measurement gap is configured and the measurement gap is not NCSG,
 - a CBD-RS resource or an SMTc occasion is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and
 - $x_{\text{RP}} = \text{MGRP}$
- Otherwise, when NCSG is measurement gap configured,
 - a CBD-RS resource or an SMTc occasion is considered to be overlapped with the GAP if
 - it overlaps the VIL1 or VIL2 of NCSG, or
 - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,
 - and
 - $x_{\text{RP}} = \text{VIRP}$
- When concurrent gaps are configured, a CBD-RS resource or an SMTc occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according clause to 9.1.8.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTc occasion and GAP configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

The values of P_{CBD} used in Table 8.5.5.2-1 and Table 8.5.5.2-2 are defined as

For each SSB resource in the set $\bar{q}_l$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- $P_{\text{CBD}} = 1$.

For each SSB resource in the set $\bar{q}_l$ configured for PSCell in NR-DC

- $P_{\text{CBD}} = 2$ if UE is configured for candidate beam detection on SCell, 1 otherwise.

For each SSB resource in the set $\bar{q}_l$ configured for a SCell

- $P_{\text{CBD}} = Z$ in EN-DC or NE-DC or SA.
- $P_{\text{CBD}} = 2 * Z$ in NR-DC.
- Where Z is the number of band(s) on which UE is performing candidate beam detection only for SCell

- P_{CBD} is the number of band(s) on which UE is performing candidate beam detection only for SCell.

Table 8.5.5.2-1: Evaluation period $T_{Evaluate_CBD_SSB}$ for FR1

Configuration	$T_{Evaluate_CBD_SSB}$ (ms)
non-DRX, DRX cycle ≤ 320 ms	$\text{Max}(25, \text{Ceil}(3 \times P \times P_{CBD}) \times T_{SSB})$
DRX cycle > 320 ms	$\text{Ceil}(3 \times P \times P_{CBD}) \times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.	

Table 8.5.5.2-2: Evaluation period $T_{Evaluate_CBD_SSB}$ for FR2

Configuration	$T_{Evaluate_CBD_SSB}$ (ms)
non-DRX, DRX cycle ≤ 320 ms	$\text{Max}(25, \text{Ceil}(3 \times P \times N \times P_{CBD}) \times T_{SSB})$
DRX cycle > 320 ms	$\text{Ceil}(3 \times P \times N \times P_{CBD}) \times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.	

8.5.5.3 Measurement restriction for SSB based candidate beam detection

For FR1, when the SSB OFDM symbols used for CBD measurement fully or partially overlap with CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for CBD measurement without any restrictions;
- If SSB and CSI-RS have different SCS-es,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for CBD measurement without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

For FR2, when the SSB for CBD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

For FR2, when the SSB for CBD measurement on one CC is in the same OFDM symbol as SSB from cell with additional PCI for BFD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSBs. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

For FR2, if network configures same or mixed numerology between SSB for CBD measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, UE shall be able to perform the related SSB based measurements in one band without any measurement restrictions in the other band, provided that UE is capable of independent beam management on this FR2 band pair.

8.5.6 Requirements for CSI-RS based candidate beam detection

8.5.6.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the set $\bar{q}_1$ configured for a serving cell, provided that the CSI-RS resources configured for candidate beam detection are actually transmitted within UE active DL BWP

during the entire evaluation period specified in clause 8.5.6.2. The requirements in this clause apply when UE is required to perform candidate beam detection on no more than 1 serving cell per band.

8.5.6.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured CSI-RS resource in set $\bar{q}_l$ estimated over the last $T_{\text{Evaluate_CBD_CSI-RS}}$ [ms] period becomes better than the threshold $Q_{\text{in_LR}}$ within $T_{\text{Evaluate_CBD_CSI-RS}}$ [ms] period provided CSI-RS $\hat{E}_s/\text{Iot}$ is according to Annex Table B.2.4.2 for a corresponding band.

The UE shall monitor the configured CSI-RS resources using the evaluation period in table 8.5.6.2-1 and 8.5.6.2-2 corresponding to the non-DRX mode, if the configured DRX cycle $\leq 320\text{ms}$.

The value of $T_{\text{Evaluate_CBD_CSI-RS}}$ is defined in Table 8.5.6.2-1 for FR1.

The value of $T_{\text{Evaluate_CBD_CSI-RS}}$ is defined in Table 8.5.6.2-2 for FR2 with scaling factor $N=8$ for FR2-1 and $N=12$ for FR2-2.

For a UE supporting *concurrentMeasGap-r17* and when concurrent gaps are configured,

- P value for a CBD-RS resource to be measured is defined as
 - $N_{\text{total}} / N_{\text{outside_MG}}$ in FR1
 - $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ in FR2 with $N_{\text{available}} = 0$
 - $N_{\text{total}} / N_{\text{available}}$ in FR2 with $N_{\text{available}} > 0$
- For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any CBD-RS resource occasion:
 - N_{total} is the total number of CBD-RS resource occasions within the window W, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
 - $N_{\text{outside_MG}}$ is the number of CBD-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
 - $N_{\text{available}}$ is the number of CBD-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W
 - T_{L1} is periodicity of the target CBD-RS.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{xRP}}$, when in the monitored cell there are GAPS configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and
- $P = 1$ when in the monitored cell there are no GAPS overlapping with any occasion of the CSI-RS.

For FR2,

- $P = 1$, when candidate beam detection RS is not overlapped with GAP and also not overlapped with SMTC occasion.
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{xRP}}$, when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is not overlapped with SMTC occasion ($T_{\text{CSI-RS}} < xRP$)
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is not overlapped with GAP and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$).

- $P = P_{\text{sharing factor}}$, when candidate beam detection RS is not overlapped with GAP and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{xRP} - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with GAP and
 - $T_{\text{SMTCperiod}} \neq xRP$ or
 - $T_{\text{SMTCperiod}} = xRP$ and $T_{\text{CSI-RS}} < 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{xRP}}$, when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with GAP and $T_{\text{SMTCperiod}} = xRP$ and $T_{\text{CSI-RS}} = 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\text{Min}(xRP, T_{\text{SMTCperiod}})}}$, when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with GAP
- $P = \frac{3}{1 - \frac{T_{\text{CSI-RS}}}{xRP}}$, when candidate beam detection RS is partially overlapped with GAP and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with GAP ($T_{\text{SMTCperiod}} < xRP$)

where,

- $P_{\text{sharing factor}} = 1$, if the CBD-RS resource outside gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
 - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{\text{sharing factor}} = 3$, otherwise.
- If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{\text{SMTCperiod}}$ follows *smtc2*; Otherwise $T_{\text{SMTCperiod}}$ follows *smtc1*. $T_{\text{SMTCperiod}}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.
- If the UE is configured with Pre-MG, a CBD-RS resource or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.
 - When a measurement gap is configured and the measurement gap is not NCSG,
 - a CBD-RS resource or an SMTC occasion is considered to be overlapped with the GAP if it overlaps the measurement gap occasion, and
 - $xRP = \text{MGRP}$
- Otherwise, when NCSG measurement gap is configured,
 - a CBD-RS resource or an SMTC occasion is considered to be overlapped with the GAP if
 - it overlaps the VIL1 or VIL2 of NCSG, or
 - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency

carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,

- and
- $xRP = VIRP$
- When concurrent gaps are configured, a CBD-RS resource or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to clause 9.1.8.

Note: The overlap between CSI-RS for CBD and SMTC means that CSI-RS for CBD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and GAP configurations does not meet previous conditions.

Longer evaluation period would be expected if the CSI-RS is on the same OFDM symbols with RLM, BFD, BM-RS, or other CBD-RS, according to the measurement restrictions defined in clause 8.5.6.3.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

The values of M_{CBD} used in Table 8.5.6.2-1 and Table 8.5.6.2-2 are defined as

- $M_{\text{CBD}} = 3$, if the CSI-RS resource configured in the set $\bar{q}_l$ is transmitted with Density = 3 and over the bandwidth ≥ 24 PRBs.

The values of P_{CBD} used in Table 8.5.6.2-1 and Table 8.5.6.2-2 are defined as

- For each CSI-RS resource in the set $\bar{q}_l$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC
- $P_{\text{CBD}} = 1$.
- For each CSI-RS resource in the set $\bar{q}_l$ configured for PSCell in NR-DC
- $P_{\text{CBD}} = 2$ if UE configured for candidate beam detection on SCell, 1 otherwise.
- For each CSI-RS resource in the set $\bar{q}_l$ configured for a SCell
- $P_{\text{CBD}} = Z$ in EN-DC or NE-DC or SA.
- $P_{\text{CBD}} = 2 * Z$ in NR-DC.
- Where Z is the number of band(s) on which UE is performing candidate beam detection only for SCell
- P_{CBD} is the number of band(s) on which UE is performing candidate beam detection only for SCell.

Table 8.5.6.2-1: Evaluation period $T_{\text{Evaluate_CBD_CSI-RS}}$ for FR1

Configuration	$T_{\text{Evaluate_CBD_CSI-RS}}$ (ms)
non-DRX, DRX cycle ≤ 320 ms	$\text{Max}(25, \text{Ceil}(M_{\text{CBD}} \times P \times P_{\text{CBD}}) \times T_{\text{CSI-RS}})$
DRX cycle > 320 ms	$\text{Ceil}(M_{\text{CBD}} \times P \times P_{\text{CBD}}) \times T_{\text{DRX}}$
Note: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the set $\bar{q}_l$. T_{DRX} is the DRX cycle length.	

Table 8.5.6.2-2: Evaluation period $T_{\text{Evaluate_CBD_CSI-RS}}$ for FR2

Configuration	$T_{\text{Evaluate_CBD_CSI-RS}}$ (ms)
---------------	---

non-DRX, DRX cycle $\leq 320\text{ms}$	$\text{Max}(25, \text{Ceil}(\text{M}_{\text{CBD}} \times \text{P} \times \text{N} \times \text{P}_{\text{CBD}}) \times \text{T}_{\text{CSI-RS}})$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(\text{M}_{\text{CBD}} \times \text{P} \times \text{N} \times \text{P}_{\text{CBD}}) \times \text{T}_{\text{DRX}}$
Note: $\text{T}_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.	

8.5.6.3 Measurement restriction for CSI-RS based candidate beam detection

The SSB mentioned in this clause can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

For both FR1 and FR2, when the CSI-RS for CBD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for CBD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS based CBD measurement for without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer measurement period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for CBD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for CBD measurement without any restriction.

For FR2, when the CSI-RS for CBD measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer evaluation period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for CBD measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both CSI-RS for CBD measurement and the other CSI-RS. Longer evaluation period for CSI-RS based CBD measurement is expected, and no requirements are defined.

8.5.7 Scheduling availability of UE during beam failure detection

Scheduling availability restrictions when the UE is performing beam failure detection are described in the following clauses.

8.5.7.1 Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to beam failure detection performed on SSB and CSI-RS configured for BFD with the same SCS as PDSCH or PDCCH in FR1.

8.5.7.2 Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to beam failure detection when SSB is configured as BFD. For UEs which do not support

simultaneousRxDataSSB-DiffNumerology [14] the following restrictions apply due to beam failure detection when SSB is configured as BFD.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for beam failure detection.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on FR1 serving PCell or PSCell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands than the bands in which PCell or PSCell is configured.

8.5.7.3 Scheduling availability of UE performing beam failure detection on FR2

The following scheduling restriction applies due to beam failure detection.

- For the case where no RSs are provided for BFD, or when CSI-RS is configured for BFD is explicitly configured and is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON
 - There are no scheduling restrictions due to beam failure detection performed based on the CSI-RS.
- Otherwise
 - For FR2-1 or the BFD-RS is not using 480 kHz SCS or 960 kHz SCS on FR2-2, the UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on BFD-RS resource symbols to be measured for beam failure detection.
 - For FR2-2 and the BFD-RS is using 480 kHz SCS or 960 kHz SCS, the UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on BFD-RS resource symbols to be measured for beam failure detection, and on one data symbol before each BFD-RS symbol to be measured and one data symbol after each BFD-RS symbol to be measured.

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions on FR2 serving PCell or PSCell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cells in the bands due to beam failure detection performed on FR2 serving cell(s) in different band(s), provided that UE is capable of independent beam management on this FR2 band pair. Additionally, there is no scheduling restriction if the UE is configured with different numerology between SSB on one FR2 band and data on the other FR2 band provided the UE is configured for IBM operation for the band pair.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE shall receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for BFD measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE shall receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for BFD measurement.

8.5.7.4 Scheduling availability of UE performing beam failure detection on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR DC

There are no scheduling restrictions on FR1 serving cell(s) due to beam failure detection performed on FR2 serving PCell and/or PSCell.

There are no scheduling restrictions on FR2 serving cell(s) due to beam failure detection performed on FR1 serving PCell and/or PSCell.

8.5.8 Scheduling availability of UE during candidate beam detection

Scheduling availability restrictions when the UE is performing L1-RSRP measurement for candidate beam detection are described in the following clauses.

8.5.8.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as link recovery detection resource with the same SCS as PDSCH or PDCCH in FR1.

8.5.8.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as link recovery detection resource. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured as link recovery detection resource.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, TRS, CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for L1-RSRP.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on one serving cell apply to all other serving cells in the same band on the symbols that fully or partially overlap with the restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands.

8.5.8.3 Scheduling availability of UE performing L1-RSRP measurement on FR2

The following scheduling restriction applies due to candidate beam detection

- For FR2-1 or the reference symbols to be measured for candidate beam detection is not using 480 kHz SCS or 960 kHz SCS on FR2-2, the UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, CSI-RS for tracking or CSI-RS for CQI on reference symbols to be measured for candidate beam detection.
- For FR2-2 and the reference symbols to be measured for candidate beam detection is using 480 kHz SCS or 960 kHz SCS, the UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, CSI-RS for tracking or CSI-RS for CQI on reference symbols to be measured for candidate beam detection, and on one data symbol before each reference symbol to be measured for candidate beam detection and one data symbol after each reference symbol to be measured for candidate beam detection.

When intra-band carrier aggregation in FR2 is configured, the scheduling restrictions on to one serving cell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cells in the bands due to candidate beam detection performed on FR2 serving cell(s) in different band(s), provided that the FR2 serving cell(s) and the FR2 serving cell(s) for candidate beam detection are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair. Additionally, there is no scheduling restriction if the UE is configured with different numerology between SSB on one FR2 band and data on the other FR2 band provided the UE is configured for IBM operation for the band pair.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE shall receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for CBD measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE shall receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for CBD measurement.

8.5.8.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR-DC

There are no scheduling restrictions on FR1 serving cell(s) due to L1-RSRP measurement performed on FR2 serving cell(s).

There are no scheduling restrictions on FR2 serving cell(s) due to L1-RSRP measurement performed on FR1 serving cell(s).

8.5.9 Requirements for Beam Failure Recovery in SCell

8.5.9.1 Introduction

For the UE provided with a configuration of PUCCH transmission with a link recovery request (LRR) as described in clause 9.2.4 in TS 38.213 [3], if beam recovery procedure is triggered for any of SCells, the UE shall transmit SR for UL resource, followed by MAC CE providing one index for at least one corresponding SCell with radio link quality is worse than $Q_{out,LR}$, and the index q_{new} for a periodic CSI-RS configuration or for a SSB provided by higher layer, as described in clause 5.17 of TS38.321 [7], if any, for a corresponding SCell.

For the UE not provided with a configuration of PUCCH transmission with a link recovery request (LRR) as described in clause 9.2.4 in TS 38.213 [3], if beam recovery procedure is triggered for any of SCells, the UE shall transmit preamble for UL-SCH resource application, followed by MAC CE providing one index for at least one corresponding SCell with radio link quality is worse than $Q_{out,LR}$, and the index q_{new} for a periodic CSI-RS configuration or for a SSB provided by higher layer, as described in clause 5.17 of TS38.321 [7], if any, for a corresponding SCell.

8.5.9.2 Requirement

Provided that UE is configured by *schedulingRequestIDForBFR* a configuration for LRR in a PUCCH transmission, after BFR is triggered on any of SCells as described in clause 5.17 of TS38.321 [7], UE shall be capable of transmit PUCCH with a LRR within a period of T , where

- $T = T_1 \times \text{Ceil}((T_2 + D) / T_1)$ in which T_1 , T_2 and D are defined as
- T_1 is equal to the periodicity of PUCCH configured with *schedulingRequestIDForBFR*.
- $T_2 = T_{\text{Evaluate_CBD}}$ is the evaluation period specified in clause 8.5.5 or 8.5.6 for SSB or CSI-RS based candidate beam detection, that is $T_{\text{Evaluate_CBD_SSB}}$ or $T_{\text{Evaluate_CBD_CSI-RS}}$, depending on the applicable reference signal configured for candidate beam detection.
- $D = 2\text{ms}$ is the UE Processing time.

8.5.10 Minimum requirement at transitions for beam failure detection

When the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each BFD-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode for each BFD-RS resource.

When the UE transitions from a first configuration of BFD resources to a second configuration of BFD resources that is different from the first configuration, for each BFD resource present in the second configuration, for a duration of time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration and the

second configuration. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second configuration for each BFD resource present in the second configuration.

When the UE transitions from a first configuration of active TCI state of the CORESET to a second configuration of active TCI state of the CORESET, for each CSI-RS for BFD present in the second configuration, the UE shall use an evaluation period corresponding to the second configuration from the time of transition.

8.5A Link Recovery Procedures when CCA is used on target frequency

8.5A.1 Introduction

The requirements for link recovery procedure in the clause apply when CCA is used on a serving frequency on the downlink.

The UE shall assess the downlink radio link quality of a serving cell based on the reference signal in the set $\bar{q}_0$ as specified in TS 38.213 [3] in order to detect beam failure on:

- PCell in SA operation mode,
- PSCell in EN-DC operation mode.
- PSCell in NR-DC operation mode.

The RS resource configurations in the set $\bar{q}_0$ can be periodic SSBs. UE is not required to perform beam failure detection outside the active DL BWP. UE is not required to meet the requirements in clause 8.5A.2 and 8.5A.3 if UE does not have set $\bar{q}_0$.

On each RS resource configuration in the set $\bar{q}_0$, the UE shall estimate the radio link quality and compare it to the threshold $Q_{\text{out_LR,CCA}}$ for the purpose of accessing downlink radio link quality of the serving cell beams.

The threshold $Q_{\text{out_LR,CCA}}$ is defined as the level at which the downlink radio level link of a given resource configuration on set $\bar{q}_0$ cannot be reliably received and shall correspond to the $\text{BLER}_{\text{out,CCA}} = 10\%$ block error rate of a hypothetical PDCCH transmission. For SSB based beam failure detection, $Q_{\text{out_LR,SSB,CCA}}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.5A.2.1-1.

Upon request the UE shall deliver configuration indexes from the set $\bar{q}_1$ as specified in TS 38.213 [3], to higher layers, and the corresponding L1-RSRP measurement provided that the measured L1-RSRP is equal to or better than the threshold $Q_{\text{in_LR,CCA}}$, which is indicated by higher layer parameter *rsrp-ThresholdSSB*. The UE applies the $Q_{\text{in_LR,CCA}}$ threshold to the L1-RSRP measurement obtained from an SSB. The RS resource configurations in the set $\bar{q}_1$ can be periodic SSBs. UE is not required to perform candidate beam detection outside the active DL BWP.

In the requirements of clause 8.5A, the term CBD-RS SSB occasions not available at the UE refers to when the CBD-RS SSB is configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the set of configured CBD-RS resources are not available at the UE due to DL CCA failures at gNB during the corresponding evaluation period; otherwise the CBD-RS SSB is considered as available at the UE.

The requirements in clause 8.5A apply for any *channelAccessMode* configuration [TS 38.331, 2].

8.5A.2 Requirements for SSB based beam failure detection

8.5A.2.1 Introduction

The requirements in this clause apply for each SSB resource in the set $\bar{q}_0$ configured for a serving cell, provided that the SSB configured for beam failure detection is actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.5A.2.2, but occasionally may not be transmitted due to CCA operation.

Table 8.5A.2.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	Same as the SCS of RMSI CORESET
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.5A.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured BFD-RS SSB resource in set $\bar{q}_0$ estimated over the last $T_{\text{Evaluate_BFD_SSB_CCA}}$ ms period becomes worse than the threshold $Q_{\text{out_LR_SSB,CCA}}$ within $T_{\text{Evaluate_BFD_SSB_CCA}}$ ms period.

The value of $T_{\text{Evaluate_BFD_SSB_CCA}}$ is defined in Table 8.5A.2.2-1 for FR1.

The value of $T_{\text{Evaluate_BFD_SSB_CCA}}$ is defined in Table 8.5A.2.2-2 for FR2-2 with scaling factor $N=12$.

For a UE supporting *concurrentMeasGap-r17* and when concurrent gaps are configured,

- P value for a BFD-RS resource to be measured is defined as $N_{\text{total}} / N_{\text{outside_MG}}$
- For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gap and per-FR measurement gap within the same FR as serving cell, and starting at the beginning of any BFD-RS resource occasion:
 - N_{total} is the total number of BFD-RS resource occasions within the window W, including those overlapped with measurement gap occasions within the window W, and
 - $N_{\text{outside_MG}}$ is the number of BFD-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,
 - $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{xRP}}$, when in the monitored cell there are GAPS configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the BFD-RS SSB.
 - $P=1$ when in the monitored cell there are no GAPS overlapping with any occasion of the BFD-RS SSB.
- When a measurement gap is configured and the measurement gap is not NCSG,
 - a BFD-RS resource is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and
 - $xRP = \text{MGRP}$
- Otherwise, when NCSG measurement gap is configured,
 - a BFD-RS resource is considered to be overlapped with the GAP if it overlaps the VIL1 or VIL2 of NCSG, and
 - $xRP = \text{VIRP}$

- If the UE is configured with Pre-MG, a BFD-RS resource is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.
- When concurrent gaps are configured, a BFD-RS resource is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to clause 9.1.8.

For FR2-2,

- $P = \frac{1}{1 - \frac{T_{SSB}}{T_{SMTCperiod}}}$, when BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).
- $P = P_{\text{sharing factor}}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$).
- $P = \frac{1}{1 - \frac{T_{SSB}}{MGRP} - \frac{T_{SSB}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{SMTCperiod} \neq MGRP$ or
 - $T_{SMTCperiod} = MGRP$ and $T_{SSB} < 0.5 * T_{SMTCperiod}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{SSB}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod} = MGRP$ and $T_{SSB} = 0.5 * T_{SMTCperiod}$
- $P = \frac{1}{1 - \frac{T_{SSB}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with measurement gap ($T_{SSB} < MGRP$) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{SSB}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < MGRP$)

Where,

- $P_{\text{sharing factor}} = 1$, if the BFD-RS resource outside measurement gap is
 - not overlapped with the SSB symbols indicated by SSB-ToMeasure and K data symbol before each consecutive SSB symbols indicated by SSB-ToMeasure and K data symbol after each consecutive SSB symbols indicated by SSB-ToMeasure, given that SSB-ToMeasure is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and K is defined in clause 9.2.5.3.3, and;
 - not overlapped with the RSSI symbols indicated by ss-RSSI-Measurement and K data symbol before each RSSI symbol indicated by ss-RSSI-Measurement and K data symbol after each RSSI symbol indicated by ss-RSSI-Measurement, given that ss-RSSI-Measurement is configured, and K is defined in clause 9.2.5.3.3.
- $P_{\text{sharing factor}} = 3$, otherwise.

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2-2 band, given the SMTC offset of all CCs in FR2-2 provided the same offset.

Longer evaluation period would be expected if the combination of BFD-RS SSB resource, SMTC occasion and GAP configurations does not meet previous conditions.

Table 8.5A.2.2-1: Evaluation period $T_{\text{Evaluate_BFD_SSB_CCA}}$ for FR1

Configuration	$T_{\text{Evaluate_BFD_SSB_CCA}}$ (ms)	
	BFD-RS SSB Es/Iot ^{Note2} ≥ -7 dB	BFD-RS SSB Es/Iot ^{Note2} < -7 dB
no DRX	$\text{Max}(50, \text{Ceil}((10 \times P) \times T_{\text{SSB}}))$	$\text{Max}(50, \text{Ceil}((12 \times P) \times T_{\text{SSB}}))$
DRX cycle ≤ 320 ms	$\text{Max}(50, \text{Ceil}(1.5 \times 8 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$	$\text{Max}(50, \text{Ceil}(1.5 \times 10 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle > 320 ms	$\text{Ceil}(7 \times P) \times T_{\text{DRX}}$	$\text{Ceil}(8 \times P) \times T_{\text{DRX}}$
Note 1: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.		
Note 2: BFD-RS SSB Es/Iot is the averaged BFD-RS SSB Es/Iot over the most recent previous evaluation period.		

Table 8.5A.2.2-2: Evaluation period $T_{\text{Evaluate_BFD_SSB_CCA}}$ for FR2-2

Configuration	$T_{\text{Evaluate_BFD_SSB_CCA}}$ (ms)
no DRX	$\text{Max}(200, \text{Ceil}(12 \times P \times N) \times T_{\text{SSB}})$
DRX cycle ≤ 320 ms	$\text{Max}(200, \text{Ceil}(1.5 \times 10 \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle > 320 ms	$\text{Ceil}(10 \times P \times N) \times T_{\text{DRX}}$
Note 1: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.	

8.5A.2.3 Measurement restriction for SSB based beam failure detection

The UE is required to be capable of measuring SSB for BFD without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following clauses.

For FR1, when the SSB for BFD measurement is in the same OFDM symbol as CSI-RS for BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for BFD measurement without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for BFD measurement without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure SSB for BFD measurement.

For FR2-2, when the SSB for BFD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

8.5A.3 Void

8.5A.4 Minimum requirement for L1 indication

When the radio link quality on all the RS resources in set $\bar{q}_0$ is worse than $Q_{\text{out_LR_CCA}}$, layer 1 of the UE shall send a beam failure instance indication to the higher layers.

The beam failure instance evaluation for the RS resources in set $\bar{q}_0$ shall be performed as specified in clause 6 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{\text{Indication_interval_BFD_CCA}}$.

When DRX is not used, $T_{\text{Indication_interval_BFD_CCA}}$ is $\text{max}(2\text{ms}, T_{\text{SSB-RS,M}})$, where $T_{\text{SSB-RS,M}}$ is the shortest periodicity of all RS resources in set $\bar{q}_0$ for the accessed cell, corresponding to either the shortest periodicity of the SSB in the set $\bar{q}_0$.

When DRX is used, for SSB based link quality measurement,

- $T_{\text{Indication_interval_BFD_CCA}} = \text{Max}(1.5 \times \text{DRX_cycle_length}, 1.5 \times T_{\text{SSB-RS,M}})$, if $\text{DRX_cycle_length} \leq 320\text{ms}$,

- $T_{\text{Indication_interval_BFD_CCA}} = \text{DRX_cycle_length}$, if $\text{DRX_cycle_length} > 320\text{ms}$.

8.5A.5 Requirements for SSB based candidate beam detection

8.5A.5.1 Introduction

The requirements in this clause apply for each CBD-RS SSB resource in the set $\bar{q}_1$ configured for a serving cell, provided that the SSBs configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.5A.5.2, but occasionally may not be transmitted due to CCA operation.

8.5A.5.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured CBD-RS SSB resource in set $\bar{q}_1$ estimated over the last $T_{\text{Evaluate_CBD_SSB_CCA}}$ ms period becomes better than the threshold $Q_{\text{in_LR,CCA}}$ provided SSB_RP and SSB $\hat{E}_s/\text{lot}$ are according to Annex Table B.2.4.1 for a corresponding band.

The UE shall monitor the configured SSB resources using the evaluation period in table 8.5A.5.2-1 corresponding to the non-DRX mode, if the configured DRX cycle $\leq 320\text{ms}$.

The value of $T_{\text{Evaluate_CBD_SSB_CCA}}$ is defined in Table 8.5A.5.2-1 for FR1.

The value of $T_{\text{Evaluate_CBD_SSB_CCA}}$ is defined in Table 8.5A.5.2-2 for FR2-2 with scaling factor $N=12$.

For FR1,

- For a UE supporting *concurrentMeasGap-r17* and when concurrent gaps are configured,
 - P value for a CBD-RS resource to be measured is defined as $N_{\text{total}} / N_{\text{outside_MG}}$
 - For a window W of duration $\max(T_{\text{L1}}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any CBD-RS resource occasion:
 - N_{total} is the total number of CBD-RS resource occasions within the window W, including those overlapped with measurement gap occasions within the window W, and
 - $N_{\text{outside_MG}}$ is the number of CBD-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,
 - $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{x \cdot \text{RRP}}}$, when in the monitored cell there are GAPS configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CBD-RS SSB,
 - $P = 1$ when in the monitored cell there are no GAPS overlapping with any occasion of the CBD-RS SSB.

For FR2-2,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$).
- P is P_{sharing} factor, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}} - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{\text{SMTCperiod}} \neq \text{MGRP}$ or

- $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{SSB}} < 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{SSB}} = 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < \text{MGRP}$)
- $P_{\text{sharing factor}} = 1$, if the candidate beam detection RS outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and K data symbols before consecutive SSB symbols indicated by *SSB-ToMeasure* and K data symbols after consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and where K is defined in clause 9.2.5.3.3, and;
 - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and K data symbols before each RSSI symbol indicated by *ss-RSSI-Measurement* and K data symbols after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured, and where K is defined in clause 9.2.5.3.3.
- $P_{\text{sharing factor}} = 3$, otherwise.

where,

- If the high layer in TS 38.331 [2] signaling of *smc2* is present, $T_{\text{SMTCperiod}}$ follows *smc2*; Otherwise $T_{\text{SMTCperiod}}$ follows *smc1*. $T_{\text{SMTCperiod}}$ is the shortest SMTC period among all CCs in the same FR2-2 band, provided the SMTC offset of all CCs in FR2-2 have the same offset.
- If the UE is configured with Pre-MG, a CBD-RS resource is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.
- When a measurement gap is configured and the measurement gap is not NCSG,
 - a CBD-RS resource is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and
 - $x_{\text{RP}} = \text{MGRP}$
- Otherwise, when NCSG measurement gap is configured,
 - a CBD-RS resource is considered to be overlapped with the GAP if it overlaps the VIL1 or VIL2 of NCSG, and
 - $x_{\text{RP}} = \text{VIRP}$
- When concurrent gaps are configured, a CBD-RS resource is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to clause 9.1.8.

Table 8.5A.5.2-1: Evaluation period $T_{\text{Evaluate_CBD_SSB_CCA}}$ for FR1

Configuration	$T_{\text{Evaluate_CBD_SSB_CCA}}$ (ms)
non-DRX, DRX cycle $\leq 320\text{ms}$	$\text{Max}(25, \text{Ceil}((3 + L_{\text{CBD}}) \times P) \times T_{\text{SSB}})$
DRX cycle $> 320\text{ms}$	$\text{Ceil}((3 + L_{\text{CBD}}) \times P) \times T_{\text{DRX}}$

Note 1:	T_{SSB} is the periodicity of SSB in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.
Note 2:	When DRX is not configured, L_{CBD} is the number of CBD-RS SSB occasions not available at the UE during $T_{Evaluate_CBD_SSB_CCA}$ where $L_{CBD} \leq L_{CBD,max}$. When DRX is configured, L_{CBD} is the number of DRX cycles in which at least one of the CBD-RS SSB occasions not available at the UE during $T_{Evaluate_CBD_SSB_CCA}$ where $L_{CBD} \leq L_{CBD,max}$. The UE, which is configured with DRX, is not required to determine the availability of SSB occasions more frequent than Once per $\text{Max}(25\text{ms}, P * T_{SSB})$ if DRX cycle $\leq 320\text{ms}$, Once per $P * T_{DRX}$ if DRX cycle $> 320\text{ms}$.
Note 3:	$L_{CBD,max}=7$ for $\text{Max}(T_{DRX}, T_{SSB}) \leq 40$ assuming $T_{DRX}=0$ for non-DRX, $L_{CBD,max}=5$ for $40 < \text{Max}(T_{DRX}, T_{SSB}) \leq 320$, $L_{CBD,max}=3$ for $T_{DRX} > 320$.
Note 4:	If $L_{CBD} > L_{CBD,max}$, the UE shall assume no new candidate beams are found for this evaluation period.

Table 8.5A.5.2-2: Evaluation period $T_{Evaluate_CBD_SSB_CCA}$ for FR2-2

Configuration	$T_{Evaluate_CBD_SSB_CCA}$ (ms)
non-DRX, DRX cycle $\leq 320\text{ms}$	$\text{Max}(25, \text{Ceil}((3 + L_{CBD}) \times P \times N) \times T_{SSB})$
DRX cycle $> 320\text{ms}$	$\text{Ceil}((3 + L_{CBD}) \times P \times N) \times T_{DRX}$
Note 1:	T_{SSB} is the periodicity of SSB in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.
Note 2:	When DRX is not configured, L_{in} is the number of CBD-RS SSB occasions group which are not available at the UE during $T_{Evaluate_CBD_SSB_CCA}$, where $L_{CBD} \leq L_{CBD,max}$. A CBD-RS SSB occasions group consists of N consecutive CBD-RS SSB occasions, and the CBD-RS SSB occasions group is not available at the UE when at least one CBD-SSB occasion in the group is not transmitted by the gNB. When DRX is configured, L_{in} is the number of DRX cycles groups which are not available at the UE during $T_{Evaluate_CBD_SSB_CCA}$, where $L_{in} \leq L_{CBD,max}$. A DRX group consists of N DRX cycles, and the DRX group is not available when there is at least one DRX in which at least one CBD-RS SSB occasion is not available. The UE is not required to determine the availability of SSB occasions more frequent than once per DRX cycle length, when configured with DRX.
Note 3:	$L_{CBD,max}=7$ for $\text{Max}(T_{DRX}, T_{SSB}) \leq 40$ assuming $T_{DRX}=0$ for non-DRX, $L_{CBD,max}=5$ for $40 < \text{Max}(T_{DRX}, T_{SSB}) \leq 320$, $L_{CBD,max}=3$ for $T_{DRX} > 320$.
Note 4:	If $L_{CBD} > L_{CBD,max}$, the UE shall assume no new candidate beams are found for this evaluation period.

8.5A.5.3 Measurement restriction for SSB based candidate beam detection

For FR1, when the SSB for CBD measurement is in the same OFDM symbol as CSI-RS for BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for CBD measurement without any restrictions;
- If SSB and CSI-RS have different SCS-es,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for CBD measurement without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure SSB for CBD measurement.

For FR2-2, when the SSB for CBD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

8.5A.6 Void

8.5A.7 Scheduling availability of UE during beam failure detection

Scheduling availability restrictions when the UE is performing beam failure detection are described in the following clauses.

8.5A.7.1 Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH

In this clause, the same requirements apply as in Clause 8.5.7.1.

8.5A.7.2 Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH

In this clause, the same requirements apply as in Clause 8.5.7.2.

8.5A.7.3 Scheduling availability of UE performing beam failure detection on FR2-2

In this clause, the same requirements apply as in Clause 8.5.7.3.

8.5A.7.4 Scheduling availability of UE performing beam failure detection on FR1 or FR2-2 in case of FR1-FR2-2 inter-band CA and NR DC

In this clause, the same requirements apply as in Clause 8.5.7.4.

8.5A.8 Scheduling availability of UE during candidate beam detection

Scheduling availability restrictions when the UE is performing L1-RSRP measurement for candidate beam detection are described in the following clauses.

8.5A.8.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

In this clause, the same requirements apply as in Clause 8.5.8.1.

8.5A.8.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

In this clause, the same requirements apply as in Clause 8.5.8.2.

8.5A.8.3 Scheduling availability of UE performing L1-RSRP measurement on FR2-2

In this clause, the same requirements apply as in Clause 8.5.8.3.

8.5A.8.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2-2 in case of FR1-FR2-2 inter-band CA and NR-DC

In this clause, the same requirements apply as in Clause 8.5.8.4.

8.5B Link Recovery Procedures for Redcap

8.5B.1 Introduction

The Redcap UE shall assess the downlink radio link quality of a serving cell based on the reference signal in the set $\bar{q}_0$ as specified in TS 38.213 [3] in order to detect beam failure on PCell in SA. The SSB and SMTC in this section applies for both CD-SSB and NCD-SSB if it is not additionally specified.

The RS resource configurations in the set $\bar{q}_0$ on PCell can be periodic CSI-RS resources and/or SSBs. UE is not required to perform beam failure detection outside the active DL BWP. UE is not required to meet the requirements in clause 8.5B.2 and 8.5B.3 if UE does not have set $\bar{q}_0$.

On each RS resource configuration in the set $\bar{q}_0$, the UE shall estimate the radio link quality and compare it to the threshold $Q_{\text{out_LR_Redcap}}$ for the purpose of accessing downlink radio link quality of the serving cell beams.

The threshold $Q_{\text{out_LR_Redcap}}$ is defined as the level at which the downlink radio level link of a given resource configuration on set $\bar{q}_0$ cannot be reliably received and shall correspond to the $\text{BLER}_{\text{out}} = 10\%$ block error rate of a hypothetical PDCCH transmission. For SSB based beam failure detection, $Q_{\text{out_LR_SSB}}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.5B.2.1-1. For CSI-RS based beam failure detection, $Q_{\text{out_LR_CSI-RS}}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.5B.3.1-1.

Upon request the UE shall deliver configuration indexes from the set $\bar{q}_1$ as specified in TS 38.213 [3], to higher layers, and the corresponding L1-RSRP measurement provided that the measured L1-RSRP is equal to or better than the threshold $Q_{\text{in_LR_RedCap}}$, which is indicated by higher layer parameter *rsrp-ThresholdSSB*. The UE applies the $Q_{\text{in_LR_RedCap}}$ threshold to the L1-RSRP measurement obtained from an SSB. The UE applies the $Q_{\text{in_LR_RedCap}}$ threshold to the L1-RSRP measurement obtained for a CSI-RS resource after scaling a respective CSI-RS reception power with a value provided by higher layer parameter *powerControlOffsetSS*. The RS resource configurations in the set $\bar{q}_1$ can be periodic CSI-RS resources or SSBs or both SSB and CSI-RS resources. UE is not required to perform candidate beam detection outside the active DL BWP.

8.5B.2 Requirements for SSB based beam failure detection for Redcap

8.5B.2.1 Introduction

The requirements in this clause apply for each SSB resource in the set $\bar{q}_0$ configured for a serving cell, provided that the SSB configured for beam failure detection is actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.5B.2.2.

Table 8.5B.2.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	16 for 1 Rx UE; 8 for 2 Rx UE
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	48 for 1 Rx UE; 24 for 2 Rx UE
Sub-carrier spacing (kHz)	Same as the SCS of RMSI CORESET

DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note 1 : Note: SCS=60kHz is not applicable for FR1	

8.5B.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in set $\bar{q}_0$ estimated over the last $T_{\text{Evaluate_BFD_SSB_Redcap}}$ ms period becomes worse than the threshold $Q_{\text{out_LR_SSB}}$ within $T_{\text{Evaluate_BFD_SSB_Redcap}}$ ms period.

The value of $T_{\text{Evaluate_BFD_SSB_Redcap}}$ is defined in Table 8.5B.2.2-1 for FR1.

The value of $T_{\text{Evaluate_BFD_SSB_Redcap}}$ is defined in Table 8.5B.2.2-2 for FR2 with scaling factor $N=8$

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB.
- $P=1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$).
- $P = P_{\text{sharing factor}}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC period ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}} - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{\text{SMTCperiod}} \neq \text{MGRP}$ or
 - $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{SSB}} < 0.5 * T_{\text{SMTCperiod}}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{SSB}} = 0.5 * T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when the BFD-RS resource is partially overlapped with measurement gap ($T_{\text{SSB}} < \text{MGRP}$) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap.
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < \text{MGRP}$)
- $P_{\text{sharing factor}} = 1$, if the BFD-RS resource outside measurement gap is
 - not overlapped with the SSB symbols indicated by SSB-ToMeasure and 1 data symbol before each consecutive SSB symbols indicated by SSB-ToMeasure and 1 data symbol after each consecutive SSB symbols indicated by SSB-ToMeasure, given that SSB-ToMeasure is configured, where the SSB-ToMeasure

is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;

- not overlapped with the RSSI symbols indicated by ss-RSSI-Measurement and 1 data symbol before each RSSI symbol indicated by ss-RSSI-Measurement and 1 data symbol after each RSSI symbol indicated by ss-RSSI-Measurement, given that ss-RSSI-Measurement is configured.- Psharing factor = 3, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{\text{SMTCPeiod}}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{\text{SMTCPeiod}}$ corresponds to the value of higher layer parameter *smtc1*.

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTc occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

Table 8.5B.2.2-1: Evaluation period $T_{\text{Evaluate_BFD_SSB_Redcap}}$ for FR1

Configuration	$T_{\text{Evaluate_BFD_SSB_Redcap}}$ (ms) for Redcap UE with 2 Rx	$T_{\text{Evaluate_BFD_SSB_Redcap}}$ (ms) for 1 Rx Redcap
no DRX	$\text{Max}(50, \text{Ceil}(5 \times P) \times T_{\text{SSB}})$	$[\text{Max}(50, \text{Ceil}(10 \times P) \times T_{\text{SSB}})]$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(50, \text{Ceil}(7.5 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$	$[\text{Max}(50, \text{Ceil}(15 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))]$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times P) \times T_{\text{DRX}}$	$[\text{Ceil}(10 \times P) \times T_{\text{DRX}}]$
Note: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.		

Table 8.5B.2.2-2: Evaluation period $T_{\text{Evaluate_BFD_SSB_Redcap}}$ for FR2

Configuration	$T_{\text{Evaluate_BFD_SSB_Redcap}}$ (ms)
no DRX	$\text{Max}(50, \text{Ceil}(5 \times P \times N) \times T_{\text{SSB}})$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(50, \text{Ceil}(7.5 \times P \times N) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times P \times N) \times T_{\text{DRX}}$
Note: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.	

8.5B.2.3 Measurement restriction for SSB based beam failure detection

The UE is required to be capable of measuring SSB for BFD without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB for BFD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for BFD measurement without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for BFD measurement without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

For FR2, when the SSB for BFD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC, UE is required to measure one of but not both SSB for BFD

measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

8.5B.3 Requirements for CSI-RS based beam failure detection for Redcap

8.5B.3.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the set $\bar{q}_0$ of resource configurations for a serving cell, provided that the CSI-RS resource(s) in set $\bar{q}_0$ for beam failure detection are actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.5B.3.2. UE is not expected to perform beam failure detection measurements on the CSI-RS configured for BFD if the CSI-RS is not QCL-ed, with QCL-TypeD when applicable, with the RS in the active TCI state of any CORESET configured in the UE active BWP.

Table 8.5B.3.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	16 for 1 Rx UE; 8 for 2 Rx UE
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48 for 1 Rx UE; 24 for 2 Rx UE
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed
Note 1 : Note: SCS=60kHz is not applicable for FR1	

8.5B.3.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in set $\bar{q}_0$ estimated over the last $T_{\text{Evaluate_BFD_CSI-RS_Redcap}}$ ms period becomes worse than the threshold $Q_{\text{out_LR_CSI-RS}}$ within $T_{\text{Evaluate_BFD_CSI-RS_Redcap}}$ ms period.

The value of $T_{\text{Evaluate_BFD_CSI-RS_Redcap}}$ is defined in Table 8.5B.3.2-1 for FR1.

The value of $T_{\text{Evaluate_BFD_CSI-RS_Redcap}}$ is defined in Table 8.5B.3.2-2 for FR2 with $N=1$. The requirements of $T_{\text{Evaluate_BFD_CSI-RS_Redcap}}$ apply provided that the CSI-RS for BFD is not in a resource set configured with repetition ON. The requirements shall not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for BFD and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS.
- $P = 1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR2,

- $P = 1$, when the BFD-RS resource is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is not overlapped with SMTC occasion ($T_{\text{CSI-RS}} < MGRP$)
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$).
- $P = P_{\text{sharing factor}}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP} - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{\text{SMTCperiod}} \neq MGRP$ or
 - $T_{\text{SMTCperiod}} = MGRP$ and $T_{\text{CSI-RS}} < 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = MGRP$ and $T_{\text{CSI-RS}} = 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when the BFD-RS resource is partially overlapped with measurement gap ($T_{\text{CSI-RS}} < MGRP$) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap.
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < MGRP$)
- $P_{\text{sharing factor}} = 1$, if the BFD-RS resource outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;
 - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured,
- $P_{\text{sharing factor}} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc1*.

Note: The overlap between CSI-RS for BFD and SMTC means that CSI-RS for BFD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the BFD-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

The values of M_{BFD} used in Table 8.5B.3.2-1 and Table 8.5B.3.2-2 are defined as

- $M_{\text{BFD}} = 10$, if the CSI-RS resource(s) in set $\bar{q}_0$ used for BFD is transmitted with Density = 3 and over the bandwidth ≥ 24 PRBs.

The values of P_{BFD} used in Table 8.5B.3.2-1 and Table 8.5B.3.2-2 are defined as

For each CSI-RS resource in the set $\bar{q}_0$ configured for PCell

- $P_{\text{BFD}} = 1$.

Table 8.5B.3.2-1: Evaluation period $T_{\text{Evaluate_BFD_CSI-RS_Redcap}}$ for FR1

Configuration	$T_{\text{Evaluate_BFD_CSI-RS_Redcap}}$ (ms) for Redcap UE with 2 Rx	$T_{\text{Evaluate_BFD_CSI-RS_Redcap}}$ (ms) for 1 Rx Redcap
no DRX	$\text{Max}(50, \text{Ceil}(M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times T_{\text{CSI-RS}})$	$\text{Max}(50, \text{Ceil}(2 \times M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times T_{\text{CSI-RS}})$
DRX cycle ≤ 320 ms	$\text{Max}(50, \text{Ceil}(1.5 \times M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$	$\text{Max}(50, \text{Ceil}(2 \times 1.5 \times M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
DRX cycle > 320 ms	$\text{Ceil}(M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times T_{\text{DRX}}$	$\text{Ceil}(2 \times M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times T_{\text{DRX}}$
Note: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.		

Table 8.5B.3.2-2: Evaluation period $T_{\text{Evaluate_BFD_CSI-RS_Redcap}}$ for FR2

Configuration	$T_{\text{Evaluate_BFD_CSI-RS_Redcap}}$ (ms)
no DRX	$\text{Max}(50, \text{Ceil}(M_{\text{BFD}} \times P \times N \times P_{\text{BFD}}) \times T_{\text{CSI-RS}})$
DRX cycle ≤ 320 ms	$\text{Max}(50, \text{Ceil}(1.5 \times M_{\text{BFD}} \times P \times N \times P_{\text{BFD}}) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
DRX cycle > 320 ms	$\text{Ceil}(M_{\text{BFD}} \times P \times N \times P_{\text{BFD}}) \times T_{\text{DRX}}$
Note: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.	

8.5B.3.3 Measurement restrictions for CSI-RS beam failure detection

The UE is required to be capable of measuring CSI-RS for BFD without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following scenarios.

For both FR1 and FR2, when the CSI-RS for BFD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for BFD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for BFD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

For FR2, when the CSI-RS for BFD measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD or L1-RSRP measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for BFD measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for BFD measurement and the other CSI-RS. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.
 - The CSI-RS for BFD measurement or the other CSI-RS in a resource set configured with repetition ON, or
 - The other CSI-RS is configured in set $\bar{q}_l$ and beam failure is detected, or
 - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

8.5B.4 Minimum requirement for L1 indication for Redcap

When the radio link quality on all the RS resources in set $\bar{q}_0$ is worse than $Q_{out_LR_Redcap}$, layer 1 of the UE shall send a beam failure instance indication to the higher layers,

The beam failure instance evaluation for the RS resources in set $\bar{q}_0$ shall be performed as specified in clause 6 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{Indication_interval_BFD_Redcap}$.

When DRX is not used, $T_{Indication_interval_BFD_Redcap}$ is $\max(2\text{ms}, T_{SSB-RS,M})$ or $\max(2\text{ms}, T_{CSI-RS,M})$, where $T_{SSB-RS,M}$ and $T_{CSI-RS,M}$ is the shortest periodicity of all RS resources in set $\bar{q}_0$ for the accessed cell, corresponding to either the shortest periodicity of the SSB in the set $\bar{q}_0$ or CSI-RS resource in the set $\bar{q}_0$.

When DRX is used, for SSB based link quality measurement,

- $T_{Indication_interval_BFD_Redcap} = \text{Max}(1.5 \times \text{DRX_cycle_length}, 1.5 \times T_{SSB-RS,M})$, if $\text{DRX_cycle_length} \leq 320\text{ms}$,
- $T_{Indication_interval_BFD_Redcap} = \text{DRX_cycle_length}$, if $\text{DRX_cycle_length} > 320\text{ms}$.

When DRX is used, for CSI-RS based link quality measurement,

- $T_{Indication_interval_BFD_Redcap} = \text{Max}(1.5 \times \text{DRX_cycle_length}, 1.5 \times T_{CSI-RS,M})$, if $\text{DRX_cycle_length} \leq 320\text{ms}$,
- $T_{Indication_interval_BFD_Redcap} = \text{DRX_cycle_length}$, if $\text{DRX_cycle_length} > 320\text{ms}$.

For HD-FDD UE, the above conditions and requirements for $T_{Indication_interval_BFD_Redcap}$ apply given that, for each BFD-RS configuration, at least one BFD-RS sample must fall with DL occasion within an indication period.

8.5B.5 Requirements for SSB based candidate beam detection for Redcap

8.5B.5.1 Introduction

The requirements in this clause apply for each SSB resource in the set $\bar{q}_l$ configured for a serving cell, provided that the SSBs configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.5.5.2.

8.5B.5.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured SSB resource in set $\bar{Q}_l$ estimated over the last $T_{\text{Evaluate_CBD_SSB}}$ ms period becomes better than the threshold $Q_{\text{in_LR_RedCap}}$ provided SSB_RP and SSB $\hat{E}_s/I_{\text{ot}}$ are according to Annex Table B.2.4.1 for a corresponding band.

The UE shall monitor the configured SSB resources using the evaluation period in table 8.5B.5.2-1 and 8.5B.5.2-2 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320 ms.

The value of $T_{\text{Evaluate_CBD_SSB_Redcap}}$ is defined in Table 8.5B.5.2-1 for FR1.

The value of $T_{\text{Evaluate_CBD_SSB_Redcap}}$ is defined in Table 8.5B.5.2-2 for FR2 with scaling factor $N=8$.

where,

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB,
- $P = 1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$).
- P is $P_{\text{sharing factor}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC period ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{MGRP} - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{\text{SMTCperiod}} \neq MGRP$ or
 - $T_{\text{SMTCperiod}} = MGRP$ and $T_{\text{SSB}} < 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{MGRP}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = MGRP$ and $T_{\text{SSB}} = 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{MGRP}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < MGRP$)
- $P_{\text{sharing factor}} = 1$, if the candidate beam detection RS outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;

- not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured
- $P_{\text{sharing factor}} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{\text{SMTcperiod}}$ follows *smtc2*; Otherwise $T_{\text{SMTcperiod}}$ follows *smtc1*.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTc occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

The values of P_{CBD} used in Table 8.5.5.2-1 and Table 8.5.5.2-2 are defined as

For each SSB resource in the set $\bar{q}_1$ configured for PCell

- $P_{\text{CBD}} = 1$.

Table 8.5B.5.2-1: Evaluation period $T_{\text{Evaluate_CBD_SSB_Redcap}}$ for FR1

Configuration	$T_{\text{Evaluate_CBD_SSB_Redcap}}$ (ms)
non-DRX, DRX cycle $\leq 320\text{ms}$	$\text{Max}(25, \text{Ceil}(3 \times P \times P_{\text{CBD}}) \times T_{\text{SSB}})$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(3 \times P \times P_{\text{CBD}}) \times T_{\text{DRX}}$
Note: T_{SSB} is the periodicity of SSB in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.	

Table 8.5B.5.2-2: Evaluation period $T_{\text{Evaluate_CBD_SSB_Redcap}}$ for FR2

Configuration	$T_{\text{Evaluate_CBD_SSB_Redcap}}$ (ms)
non-DRX, DRX cycle $\leq 320\text{ms}$	$\text{Max}(25, \text{Ceil}(3 \times P \times N \times P_{\text{CBD}}) \times T_{\text{SSB}})$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(3 \times P \times N \times P_{\text{CBD}}) \times T_{\text{DRX}}$
Note: T_{SSB} is the periodicity of SSB in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.	

8.5B.5.3 Measurement restriction for SSB based candidate beam detection

For FR1, when the SSB for CBD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for CBD measurement without any restrictions;
- If SSB and CSI-RS have different SCS-es,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for CBD measurement without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

For FR2, when the SSB for CBD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

8.5B.6 Requirements for CSI-RS based candidate beam detection for Redcap

8.5B.6.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the set $\bar{q}_l$ configured for a serving cell, provided that the CSI-RS resources configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.5B.6.2.

8.5B.6.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured CSI-RS resource in set $\bar{q}_l$ estimated over the last $T_{\text{Evaluate_CBD_CSI-RS_Redcap}}$ [ms] period becomes better than the threshold $Q_{\text{in_LR_RedCap}}$ within $T_{\text{Evaluate_CBD_CSI-RS_Redcap}}$ [ms] period provided CSI-RS $\hat{E}_s/\text{Iot}$ is according to Annex Table B.2.4.2 for a corresponding band.

The UE shall monitor the configured CSI-RS resources using the evaluation period in table 8.5B.6.2-1 and 8.5B.6.2-2 corresponding to the non-DRX mode, if the configured DRX cycle $\leq 320\text{ms}$.

The value of $T_{\text{Evaluate_CBD_CSI-RS_Redcap}}$ is defined in Table 8.5B.6.2-1 for FR1.

The value of $T_{\text{Evaluate_CBD_CSI-RS_Redcap}}$ is defined in Table 8.5B.6.2-2 for FR2 with scaling factor $N=8$.

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and
- $P = 1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR2,

- $P = 1$, when candidate beam detection RS is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$ when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is not overlapped with SMTC occasion ($T_{\text{CSI-RS}} < MGRP$)
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$).
- $P = P_{\text{sharing factor}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP} - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
- $T_{\text{SMTCperiod}} \neq MGRP$ or

- $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{CSI-RS}} < 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{\text{MGRP}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{CSI-RS}} = 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap
- $P = \frac{3}{1 - \frac{T_{\text{CSI-RS}}}{\text{MGRP}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < \text{MGRP}$)
- $P_{\text{sharing factor}} = 1$, if the candidate beam detection RS outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;
 - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{\text{sharing factor}} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{\text{SMTCperiod}}$ follows *smtc2*; Otherwise $T_{\text{SMTCperiod}}$ follows *smtc1*.

Note: The overlap between CSI-RS for CBD and SMTC means that CSI-RS for CBD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

Longer evaluation period would be expected if the CSI-RS is on the same OFDM symbols with RLM, BFD, BM-RS, or other CBD-RS, according to the measurement restrictions defined in clause 8.5.6.3.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

The values of M_{CBD} used in Table 8.5B.6.2-1 and Table 8.5B.6.2-2 are defined as

- $M_{\text{CBD}} = 3$, if the CSI-RS resource configured in the set $\bar{q}_l$ is transmitted with Density = 3 and over the bandwidth ≥ 24 PRBs.

The values of P_{CBD} used in Table 8.5B.6.2-1 and Table 8.5B.6.2-2 are defined as

For each CSI-RS resource in the set $\bar{q}_l$ configured for PCell

- $P_{\text{CBD}} = 1$.

Table 8.5B.6.2-1: Evaluation period $T_{\text{Evaluate_CBD_CSI-RS_Redcap}}$ for FR1

Configuration	$T_{\text{EvaluateC_CBD_CSI-RS_Redcap}}$ (ms)
---------------	--

non-DRX, DRX cycle $\leq 320\text{ms}$	$\text{Max}(25, \text{Ceil}(M_{\text{CBD}} \times P \times P_{\text{CBD}}) \times T_{\text{CSI-RS}})$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(M_{\text{CBD}} \times P \times P_{\text{CBD}}) \times T_{\text{DRX}}$
Note: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the set $\bar{q}_l$. T_{DRX} is the DRX cycle length.	

Table 8.5B.6.2-2: Evaluation period $T_{\text{Evaluate_CBD_CSI-RS_Redcap}}$ for FR2

Configuration	$T_{\text{Evaluate_CBD_CSI-RS_Redcap}}$ (ms)
non-DRX, DRX cycle $\leq 320\text{ms}$	$\text{Max}(25, \text{Ceil}(M_{\text{CBD}} \times P \times N \times P_{\text{CBD}}) \times T_{\text{CSI-RS}})$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(M_{\text{CBD}} \times P \times N \times P_{\text{CBD}}) \times T_{\text{DRX}}$
Note: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the set $\bar{q}_l$. T_{DRX} is the DRX cycle length.	

8.5B.6.3 Measurement restriction for CSI-RS based candidate beam detection

For both FR1 and FR2, when the CSI-RS for CBD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for CBD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS based CBD measurement for without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer measurement period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for CBD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for CBD measurement without any restriction.

For FR2, when the CSI-RS for CBD measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer evaluation period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for CBD measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both CSI-RS for CBD measurement and the other CSI-RS. Longer evaluation period for CSI-RS based CBD measurement is expected, and no requirements are defined.

8.5B.7 Scheduling availability of UE during beam failure detection for Redcap

Scheduling availability restrictions when the UE is performing beam failure detection are described in the following clauses.

8.5B.7.1 Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to beam failure detection performed on SSB and CSI-RS configured for BFD with the same SCS as PDSCH or PDCCH in FR1.

8.5B.7.2 Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to beam failure detection when SSB is configured as BFD. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to beam failure detection when SSB is configured as BFD.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for beam failure detection.

8.5B.7.3 Scheduling availability of UE performing beam failure detection on FR2

The following scheduling restriction applies due to beam failure detection.

- For the case where no RSs are provided for BFD, or when CSI-RS is configured for BFD is explicitly configured and is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON
 - There are no scheduling restrictions due to beam failure detection performed based on the CSI-RS.
- Otherwise
 - The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on BFD-RS resource symbols to be measured for beam failure detection.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE shall receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for BFD measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE shall receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for BFD measurement.

8.5B.8 Scheduling availability of UE during candidate beam detection for Redcap

Scheduling availability restrictions when the UE is performing L1-RSRP measurement for candidate beam detection are described in the following clauses.

8.5B.8.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as link recovery detection resource with the same SCS as PDSCH or PDCCH in FR1.

8.5B.8.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as link recovery detection resource. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured as link recovery detection resource.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, TRS, CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for L1-RSRP.

8.5B.8.3 Scheduling availability of UE performing L1-RSRP measurement on FR2

The following scheduling restriction applies due to candidate beam detection

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, CSI-RS for tracking or CSI-RS for CQI on reference symbols to be measured for candidate beam detection.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE shall receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for CBD measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE shall receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for CBD measurement.

8.5B.9 Minimum requirement at transitions for beam failure detection for Redcap

When the UE transitions between BFD CD-SSB resource and BFD NCD-SSB resource due to BWP switching during one evaluation period, the UE shall use an evaluation period that is the maximum of the evaluation period corresponding to the first SSB type and the second SSB type after the BWP switching. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second SSB type for each BFD-RS resource.

The requirements in clause 8.5.10 shall also apply except the scenarios described above.

8.5C Link Recovery Procedures for Satellite Access

8.5C.1 Introduction

The UE shall assess the downlink radio link quality of a serving cell based on the reference signal in the set $\bar{Q}_0$ as specified in TS 38.213 [3] in order to detect beam failure on PCell and the UE is configured with only PCell, which is served by satellite access node (SAN).

The RS resource configurations in the set $\bar{Q}_0$ on PCell can be periodic CSI-RS resources and/or SSBs.

On each RS resource configuration in the set $\bar{Q}_0$, the UE shall estimate the radio link quality and compare it to the threshold Q_{out_LR} for the purpose of accessing downlink radio link quality of the serving cell beams.

The threshold $Q_{\text{out_LR}}$ is defined as the level at which the downlink radio level link of a given resource configuration on set $\bar{q}_0$ cannot be reliably received and shall correspond to the $\text{BLER}_{\text{out}} = 10\%$ block error rate of a hypothetical PDCCH transmission. For SSB based beam failure detection, $Q_{\text{out_LR_SSB}}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.5.2.1C-1. For CSI-RS based beam failure detection, $Q_{\text{out_LR_CSI-RS}}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.5C.3.1-1.

Upon request the UE shall deliver configuration indexes from the set $\bar{q}_1$ as specified in TS 38.213 [3], to higher layers, and the corresponding L1-RSRP measurement provided that the measured L1-RSRP is equal to or better than the threshold $Q_{\text{in_LR}}$, which is indicated by higher layer parameter *rsrp-ThresholdSSB*. The UE applies the $Q_{\text{in_LR}}$ threshold to the L1-RSRP measurement obtained from an SSB. The UE applies the $Q_{\text{in_LR}}$ threshold to the L1-RSRP measurement obtained for a CSI-RS resource after scaling a respective CSI-RS reception power with a value provided by higher layer parameter *powerControlOffsetSS*. The RS resource configurations in the set $\bar{q}_1$ can be periodic CSI-RS resources or SSBs or both SSB and CSI-RS resources.

8.5C.2 Requirements for SSB based beam failure detection

8.5C.2.1 Introduction

The requirements in this clause apply for each SSB resource in the set $\bar{q}_0$ configured for a serving cell, provided that the SSB configured for beam failure detection is actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.5C.2.2.

Table 8.5.2.1C-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	Same as the SCS of RMSI CORESET
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.5C.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in set $\bar{q}_0$ estimated over the last $T_{\text{Evaluate_BFD_SSB}}$ ms period becomes worse than the threshold $Q_{\text{out_LR_SSB}}$ within $T_{\text{Evaluate_BFD_SSB}}$ ms period.

The value of $T_{\text{Evaluate_BFD_SSB}}$ is defined in Table 8.5C.2.2-1 for FR1.

P value for an RLM-RS resource to be measured is defined as

- $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ with $N_{\text{available}} = 0$
- $N_{\text{total}} / N_{\text{available}}$ with $N_{\text{available}} > 0$

For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W , and
- $N_{\text{outside_MG}}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{\text{available}}$ is
 - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W , if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
 - same as $N_{\text{outside_MG}}$, otherwise
- T_{L1} is periodicity of the target RLM-RS
- $P_{\text{sharing factor}} = 3$.

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For an FR1serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

Table 8.5C.2.2-1: Evaluation period $T_{\text{Evaluate_BFD_SSB}}$ for FR1

Configuration	$T_{\text{Evaluate_BFD_SSB}}$ (ms)
no DRX	$\text{Max}(50, \text{Ceil}(5 \times P) \times T_{\text{SSB}})$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(50, \text{Ceil}(7.5 \times P) \times \text{Max}(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times P) \times T_{\text{DRX}}$
Note: T_{SSB} is the periodicity of SSB in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.	

8.5C.2.3 Measurement restriction for SSB based beam failure detection

The UE is required to be capable of measuring SSB for BFD without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB for BFD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for BFD measurement without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for BFD measurement without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

8.5C.3 Requirements for CSI-RS based beam failure detection

8.5C.3.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the set $\bar{q}_0$ of resource configurations for a serving cell, provided that the CSI-RS resource(s) in set $\bar{q}_0$ for beam failure detection are actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.5C.3.2. UE is not expected to perform beam

failure detection measurements on the CSI-RS configured for BFD if the CSI-RS is not QCL-ed, with QCL-TypeD when applicable, with the RS in the active TCI state of any CORESET configured in the UE active BWP.

Table 8.5C.3.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.5C.3.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in set $\bar{q}_0$ estimated over the last $T_{\text{Evaluate_BFD_CSI-RS}}$ ms period becomes worse than the threshold $Q_{\text{out_LR_CSI-RS}}$ within $T_{\text{Evaluate_BFD_CSI-RS}}$ ms period.

The value of $T_{\text{Evaluate_BFD_CSI-RS}}$ is defined in Table 8.5C.3.2-1 for FR1.

The requirements of $T_{\text{Evaluate_BFD_CSI-RS}}$ apply provided that the CSI-RS for BFD is not in a resource set configured with repetition ON. The requirements shall not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for BFD and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

P value for an RLM-RS resource to be measured is defined as

- $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ with $N_{\text{available}} = 0$
- $N_{\text{total}} / N_{\text{available}}$ with $N_{\text{available}} > 0$

For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
- $N_{\text{outside_MG}}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{\text{available}}$ is
 - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
 - same as $N_{\text{outside_MG}}$, otherwise
- T_{L1} is periodicity of the target RLM-RS
- $P_{\text{sharing factor}} = 3$.

Note: The overlap between CSI-RS for BFD and SMTC means that CSI-RS for BFD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the BFD-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

The values of M_{BFD} used in Table 8.5C.3.2-1 and Table 8.5C.3.2-2 are defined as

- $M_{\text{BFD}} = 10$, if the CSI-RS resource(s) in set $\bar{q}_0$ used for BFD is transmitted with Density = 3 and over the bandwidth ≥ 24 PRBs.

The values of P_{BFD} used in Table 8.5C.3.2-1 and Table 8.5C.3.2-2 are defined as

For each CSI-RS resource in the set $\bar{q}_0$ configured for PCell SA

- $P_{\text{BFD}} = 1$.

Table 8.5C.3.2-1: Evaluation period $T_{\text{Evaluate_BFD_CSI-RS}}$ for FR1

Configuration	$T_{\text{Evaluate_BFD_CSI-RS}}$ (ms)
no DRX	$\text{Max}(50, \text{Ceil}(M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times T_{\text{CSI-RS}})$
DRX cycle ≤ 320 ms	$\text{Max}(50, \text{Ceil}(1.5 \times M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
DRX cycle > 320 ms	$\text{Ceil}(M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times T_{\text{DRX}}$
Note: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the set $\bar{q}_0$. T_{DRX} is the DRX cycle length.	

8.5C.3.3 Measurement restrictions for CSI-RS beam failure detection

The UE is required to be capable of measuring CSI-RS for BFD without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following scenarios.

For FR1, when the CSI-RS for BFD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for BFD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for BFD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

8.5C.4 Minimum requirement for L1 indication

When the radio link quality on all the RS resources in set $\bar{q}_0$ is worse than $Q_{\text{out_LR}}$, layer 1 of the UE shall send a beam failure instance indication to the higher layers

The beam failure instance evaluation for the RS resources in set $\bar{q}_0$ shall be performed as specified in clause 6 in TS 38.213 [3]. Two successive indications from layer 1 shall be separated by at least $T_{\text{Indication_interval_BFD}}$.

When DRX is not used, $T_{\text{Indication_interval_BFD}}$ is $\max(2\text{ms}, T_{\text{SSB-RS},M})$ or $\max(2\text{ms}, T_{\text{CSI-RS},M})$, where $T_{\text{SSB-RS},M}$ and $T_{\text{CSI-RS},M}$ is the shortest periodicity of all RS resources in set $\bar{q}_0$ for the accessed cell, corresponding to either the shortest periodicity of the SSB in the set $\bar{q}_0$ or CSI-RS resource in the set $\bar{q}_0$.

When DRX is used, for SSB based link quality measurement,

- $T_{\text{Indication_interval_BFD}} = \text{Max}(1.5 \times \text{DRX_cycle_length}, 1.5 \times T_{\text{SSB-RS},M})$, if $\text{DRX_cycle_length} \leq 320\text{ms}$,
- $T_{\text{Indication_interval_BFD}} = \text{DRX_cycle_length}$, if $\text{DRX_cycle_length} > 320\text{ms}$.

When DRX is used, for CSI-RS based link quality measurement,

- $T_{\text{Indication_interval_BFD}} = \text{Max}(1.5 \times \text{DRX_cycle_length}, 1.5 \times T_{\text{CSI-RS},M})$, if $\text{DRX_cycle_length} \leq 320\text{ms}$,
- $T_{\text{Indication_interval_BFD}} = \text{DRX_cycle_length}$, if $\text{DRX_cycle_length} > 320\text{ms}$.

8.5C.5 Requirements for SSB based candidate beam detection

8.5C.5.1 Introduction

The requirements in this clause apply for each SSB resource in the set $\bar{q}_l$ configured for a serving cell, provided that the SSBs configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.5C.5.2.

8.5C.5.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured SSB resource in set $\bar{q}_l$ estimated over the last $T_{\text{Evaluate_CBD_SSB}}$ ms period becomes better than the threshold $Q_{\text{in_LR}}$ provided SSB_{RP} and SSB_{Es/lot} are according to Annex Table B.2.19.1 for a corresponding band.

The UE shall monitor the configured SSB resources using the evaluation period in table 8.5C.5.2-1 and 8.5C.5.2-2 corresponding to the non-DRX mode, if the configured DRX cycle $\leq 320\text{ms}$.

The value of $T_{\text{Evaluate_CBD_SSB}}$ is defined in Table 8.5C.5.2-1 for FR1.

where,

P value for an RLM-RS resource to be measured is defined as

- $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ with $N_{\text{available}} = 0$
- $N_{\text{total}} / N_{\text{available}}$ with $N_{\text{available}} > 0$

For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
- $N_{\text{outside_MG}}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{\text{available}}$ is
 - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
 - same as $N_{\text{outside_MG}}$, otherwise
- T_{L1} is periodicity of the target RLM-RS

- $P_{\text{sharing factor}} = 3$.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

The values of P_{CBD} used in Table 8.5C.5.2-1 and Table 8.5C.5.2-2 are defined as

For each SSB resource in the set $\bar{q}_1$ configured for PCell.

- $P_{\text{CBD}} = 1$.

Table 8.5C.5.2-1: Evaluation period $T_{\text{Evaluate_CBD_SSB}}$ for FR1

Configuration	$T_{\text{Evaluate_CBD_SSB}}$ (ms)
non-DRX, DRX cycle $\leq 320\text{ms}$	$\text{Max}(25, \text{Ceil}(3 \times P \times P_{\text{CBD}}) \times T_{\text{SSB}})$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(3 \times P \times P_{\text{CBD}}) \times T_{\text{DRX}}$
Note: T_{SSB} is the periodicity of SSB in the set $\bar{q}_1$. T_{DRX} is the DRX cycle length.	

8.5C.5.3 Measurement restriction for SSB based candidate beam detection

For FR1, when the SSB for CBD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for CBD measurement without any restrictions;
- If SSB and CSI-RS have different SCS-es,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for CBD measurement without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

8.5C.6 Requirements for CSI-RS based candidate beam detection

8.5C.6.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the set $\bar{q}_1$ configured for a serving cell, provided that the CSI-RS resources configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.5C.6.2.

8.5C.6.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured CSI-RS resource in set $\bar{q}_1$ estimated over the last $T_{\text{Evaluate_CBD_CSI-RS}}$ [ms] period becomes better than the threshold $Q_{\text{in_LR}}$ within $T_{\text{Evaluate_CBD_CSI-RS}}$ [ms] period provided CSI-RS $\hat{E}_s/\text{Iot}$ is according to Annex Table B.2.19.2 for a corresponding band.

The UE shall monitor the configured CSI-RS resources using the evaluation period in table 8.5C.6.2-1 and 8.5C.6.2-2 corresponding to the non-DRX mode, if the configured DRX cycle $\leq 320\text{ms}$.

The value of $T_{\text{Evaluate_CBD_CSI-RS}}$ is defined in Table 8.5C.6.2-1 for FR1.

P value for an RLM-RS resource to be measured is defined as

- $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ with $N_{\text{available}} = 0$
- $N_{\text{total}} / N_{\text{available}}$ with $N_{\text{available}} > 0$

For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any RLM-RS resource occasion:

- N_{total} is the total number of RLM-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window W , and
- $N_{\text{outside_MG}}$ is the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{\text{available}}$ is
 - the number of RLM-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W , if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
 - same as $N_{\text{outside_MG}}$, otherwise
- T_{L1} is periodicity of the target RLM-RS
- $P_{\text{sharing factor}} = 3$.

Note: The overlap between CSI-RS for CBD and SMTC means that CSI-RS for CBD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For an FR1 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

The values of M_{CBD} used in Table 8.5C.6.2-1 and Table 8.5C.6.2-2 are defined as

- $M_{\text{CBD}} = 3$, if the CSI-RS resource configured in the set $\bar{q}_l$ is transmitted with Density = 3 and over the bandwidth ≥ 24 PRBs.

The values of P_{CBD} used in Table 8.5C.6.2-1 are defined as

For each CSI-RS resource in the set $\bar{q}_l$ configured for SA

- $P_{\text{CBD}} = 1$.

Table 8.5C.6.2-1: Evaluation period $T_{\text{Evaluate_CBD_CSI-RS}}$ for FR1

Configuration	$T_{\text{EvaluateC_CBD_CSI-RS}}$ (ms)
non-DRX, DRX cycle $\leq 320\text{ms}$	$\text{Max}(25, \text{Ceil}(M_{\text{CBD}} \times P \times P_{\text{CBD}}) \times T_{\text{CSI-RS}})$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(M_{\text{CBD}} \times P \times P_{\text{CBD}}) \times T_{\text{DRX}}$
Note: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the set $\bar{q}_l$. T_{DRX} is the DRX cycle length.	

8.5C.6.3 Measurement restriction for CSI-RS based candidate beam detection

For FR1, when the CSI-RS for CBD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for CBD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS based CBD measurement for without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer measurement period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for CBD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for CBD measurement without any restriction.

8.5C.7 Scheduling availability of UE during beam failure detection

Scheduling availability restrictions when the UE is performing beam failure detection are described in the following clauses.

8.5C.7.1 Scheduling availability of UE performing beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to beam failure detection performed on SSB and CSI-RS configured for BFD with the same SCS as PDSCH or PDCCH in FR1.

8.5C.7.2 Scheduling availability of UE performing beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to beam failure detection when SSB is configured as BFD. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to beam failure detection when SSB is configured as BFD.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for beam failure detection.

8.5C.8 Scheduling availability of UE during candidate beam detection

Scheduling availability restrictions when the UE is performing L1-RSRP measurement for candidate beam detection are described in the following clauses.

8.5C.8.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as link recovery detection resource with the same SCS as PDSCH or PDCCH in FR1.

8.5C.8.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as link recovery detection resource. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured as link recovery detection resource.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, TRS, CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for L1-RSRP.

8.5C.9 Minimum requirement at transitions for beam failure detection

When the UE transitions between DRX and no DRX or when DRX cycle periodicity changes, for each BFD-RS resource, for a duration of time equal to the evaluation period corresponding to the second mode after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation period corresponding to the first mode and the second mode. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second mode for each BFD-RS resource.

When the UE transitions from a first configuration of BFD resources to a second configuration of BFD resources that is different from the first configuration, for each BFD resource present in the second configuration, for a duration of time equal to the evaluation period corresponding to the second configuration after the transition occurs, the UE shall use an evaluation period that is no less than the minimum of evaluation periods corresponding to the first configuration and the second configuration. Subsequent to this duration, the UE shall use an evaluation period corresponding to the second configuration for each BFD resource present in the second configuration.

When the UE transitions from a first configuration of active TCI state of the CORESET to a second configuration of active TCI state of the CORESET, for each CSI-RS for BFD present in the second configuration, the UE shall use an evaluation period corresponding to the second configuration from the time of transition.

8.6 Active BWP switch delay

8.6.1 Introduction

The requirements in this clause apply for a UE configured PCell or any activated SCell in standalone NR or NE-DC, PCell, PSCell or any activated SCell in MCG or SCG in NR-DC, or PSCell or any activated SCell in SCG in EN-DC. The requirements in this clause also apply for a UE configured with more than one BWP on PCell or any activated SCell with CCA in standalone NR, or PSCell or any activated SCell with CCA in SCG in EN-DC. The requirements in 8.6.4 apply for a UE which is capable of *ul-LBT-FailureDetectionRecovery-r16* configured with more than one UL BWP on PCell with CCA in standalone NR or PSCell with CCA in EN-DC.

UE shall complete the switch of active DL and/or UL BWP within the delay defined in this clause.

8.6.2 DCI and timer based BWP switch delay on a single CC

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with more than one BWP configurations configured.

For DCI-based BWP switch, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{\text{BWPswitchDelay}} + Y$ which starts from the beginning of DL slot n . Where,

- $Y=0$, if the serving cell where UE receives DCI for BWP switch request is same as the serving cell on which BWP switch occurs.
- Y equals to the length of 1 slot, if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell. In this scenario, $T_{\text{BWPswitchDelay}} + Y$ shall follow the smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change. If both scheduling cell and scheduled cell are in FR2-2, Y shall follow the SCS of 120 KHz.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{\text{BWPswitchDelay}}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

For timer-based BWP switch, the UE shall start BWP switch at DL slot n , where slot n is the first slot of a DL subframe (FR1) or DL half-subframe (FR2) immediately after a BWP-inactivity timer *bwp-InactivityTimer* [2] expires on a serving cell, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active

BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{\text{BWPswitchDelay}}$ which starts from the beginning of DL slot n .

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{\text{BWPswitchDelay}}$ after *bwp-InactivityTimer* [2] expires on the cell where timer-based BWP switch occurs.

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{\text{BWPswitchDelay}}$ defined in Table 8.6.2-1.

Table 8.6.2-1: BWP switch delay

μ	NR Slot length (ms)	BWP switch delay $T_{\text{BWPswitchDelay}}$ (slots)	
		Type 1 ^{Note 1}	Type 2 ^{Note 1}
0	1	1	3
1	0.5	2	5
2	0.25	3	9
3	0.125	6	18
5	0.03125	20	65
6	0.015625	39	129
Note 1: Depends on UE capability. Note 2: If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch.			

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in the new BWP.
- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in the new BWP.

Provided the UE does not have the required activated TCI-state(s) information to receive PDCCH/ PDSCH and to transmit PUSCH/PUCCH/SRS in the new BWP, the UE shall use old TCI-state(s) before the BWP switch until a new MAC CE updating the required activated TCI-state(s) information is received after the BWP switch.

If the BWP switch is triggered within or outside DRX active time, and one of the two BWPs in a BWP switching is a dormant BWP [TS 38.321, 7], UE shall be able to complete active BWP switching within the time duration of

- $T_{\text{dormantBWPswitchDelay}} = T_{\text{BWPswitchDelay}} + X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is receiveds, or
- $T_{\text{dormantBWPswitchDelay}} = T_{\text{BWPswitchDelay}} + X + Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where
- $T_{\text{BWPswitchDelay}}$ is defined in Table 8.6.2-1 corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs;
- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs. If both scheduling cell and scheduled cell are in FR2-2, X shall follow the SCS of 120 KHz.
- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where UE receives dormancy indication.

For DCI-based BWP switch, if the new BWP is a dormant BWP, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive CSI-RS (for DL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL slot occurs right after a time duration of $T_{\text{dormantBWPswitchDelay}}$ which starts from the beginning of DL slot n .

8.6.2A DCI based BWP switch delay on multiple CCs

The requirements in this clause only apply to the case when the same type of BWP switch (DCI based BWP switch) is performed on multiple CCs simultaneously or over partially overlapping time period.

8.6.2A.1 Simultaneous DCI based BWP switch delay on multiple CCs

The delay requirements for simultaneous DCI based BWP switch on multiple CCs in this clause apply only if the timing difference among the first symbol of slot carrying DCI for all CCs is received within the MRTD for inter-band CA as defined in clause 7.6.4.

For DCI-based BWP switch on multiple CCs, after the UE receives BWP switching request, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{\text{MultipleBWPswitchDelay}}$ which starts from the beginning of DL slot n , where slot n is slot which UE receives the earliest BWP switching request among CCs on which UE is performing simultaneous DCI-based BWP switching.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{\text{MultipleBWPswitchDelay}}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths on any serving cell.

UE shall finish BWP switch within the time duration $T_{\text{MultipleBWPswitchDelay}} + Y$, which is defined as:

$$T_{\text{MultipleBWPswitchDelay}} = T_{\text{BWPswitchDelay}} + D \cdot (N-1)$$

Where:

- $T_{\text{BWPswitchDelay}}$ is the BWP switching delay on single CC defined in Table 8.6.2-1 depending on UE capability *bwp-SwitchingDelay* [2]. $T_{\text{BWPswitchDelay}}$ shall be based on the smallest SCS among SCS of all involved CCs before and after BWP switch. If the BWP switch on multiple CCs results in the change of the SCS on any CC among involved CCs, $T_{\text{BWPswitchDelay}}$ shall be based on the smallest SCS among all SCS values of all involved CCs.
- D is the incremental delay for each additional CC involved in simultaneous BWP switch and depends on UE capability *bwp-SwitchingMultiCCs-r16* [TS 38.306, 14] for switching between non-dormant BWPs, and *bwp-SwitchingMultiDormancyCCs-r16* for switching between non-dormant and dormant BWPs.
- For UE which is capable of per-FR gap, and no BWP switch involves SCS change, N is the number of CCs in same FR; For UE which is not capable of per-FR gap, or the BWP switches on any CC involves SCS changing, N is the number of CCs undergoing simultaneous BWP switch.
- $Y=0$, if the serving cell where UE receives DCI for BWP switch is same as the serving cell on which BWP switch occurs for each involved serving cell.

Y equals to the length of one slot at smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change,

- if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell. If both scheduling cell and scheduled cell are in FR2-2, Y shall follow the SCS of 120 KHz.

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in the new BWP.
- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in the new BWP.

Provided the UE does not have the required activated TCI-state(s) information to receive PDCCH/ PDSCH and to transmit PUSCH/PUCCH/SRS in the new BWP, the UE shall use old TCI-state(s) before the BWP switch until a new MAC CE updating the required activated TCI-state(s) information is received after the BWP switch.

If the BWP switch is triggered on multiple CCs simultaneously within or outside DRX active time, and one of the two BWPs on each CC in a BWP switching is a dormant BWP [TS 38.321, 7], UE shall be able to complete active BWP switching within the time duration of

- $T_{\text{DormantMultipleBWPswitchDelay}} = T_{\text{MultipleBWPswitchDelay}} + X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, or
- $T_{\text{DormantMultipleBWPswitchDelay}} = T_{\text{MultipleBWPswitchDelay}} + X + Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where
- $T_{\text{MultipleBWPswitchDelay}}$ is defined above corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs;
- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs. If both scheduling cell and scheduled cell are in FR2-2, X shall follow the SCS of 120 KHz.
- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where DCI for dormancy indication is received.

The number of CCs, N, on which the UE can simultaneously switch BWPs while still meeting the requirements, if any, related to allocations on downlink, uplink, or transmission of HARQ-ACK, depends on the UE reported capabilities related to BWP switching, the network configuration and the BWP switch method.

8.6.2A.2 Non-simultaneous DCI based BWP switch delay on multiple CCs

In non-simultaneous case, the DCI-based BWP switch on multiple CCs is triggered over partially overlapping time period between CCs or multiple CCs in different Cell groups. The delay requirements for non-simultaneous DCI based BWP switch on multiple CCs in this clause apply only if:

- the timing difference among the first symbol of slot carrying DCI for all CCs involved in non-simultaneous BWP switch is received exceeds the MRTD for inter-band CA as defined in clause 7.6.4, and
- UE is operating in NR-DC (FR1+FR2), and
- UE is capable of per-FR gap, and
- BWP switch does not involve SCS change

For non-simultaneous DCI based BWP switch on multiple CCs, BWP switching delay requirements defined in clause 8.6.2 apply when BWP switching occurs on single CC in the cell group. BWP switching delay requirements defined in clause 8.6.2A.1 apply when simultaneous BWP switching occurs on multiple CCs in the cell group.

8.6.2B Timer based BWP switch delay on multiple CCs

The requirements in this clause only apply to the case when the same type of BWP switch (timer based BWP switch) is performed on multiple CCs simultaneously or over partially overlapping time period.

8.6.2B.1 Simultaneous timer based BWP switch delay on multiple CCs

The delay requirements for simultaneous timer based BWP switch on multiple CCs in this clause apply only if the timing difference among the beginning of the slot where timer based BWP switching starts for all CCs is within the MRTD for inter-band CA as defined in clause 7.6.4.

For timer-based BWP switch on multiple CCs, UE shall start BWP switch at DL slot n , where slot n is the first slot of a DL subframe (in FR1) or DL half-subframe ((in FR2) immediately after the earliest BWP-inactivity timer *bwp-InactivityTimer* [2] expiration occurs on multiple serving cells, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{\text{MultipleBWPswitchDelay}}$ which starts from the beginning of DL slot n , where $T_{\text{MultipleBWPswitchDelay}}$ is defined in 8.6.2A.1.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{\text{MultipleBWPswitchDelay}}$ after *bwp-InactivityTimer* [2] expires on the cell where timer-based BWP switch occurs.

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in the new BWP.
- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in the new BWP.

Provided the UE does not have the required activated TCI-state(s) information to receive PDCCH/ PDSCH and to transmit PUSCH/PUCCH/SRS in the new BWP, the UE shall use old TCI-state(s) before the BWP switch until a new MAC CE updating the required activated TCI-state(s) information is received after the BWP switch.

8.6.2B.2 Non-simultaneous timer based BWP switch delay on multiple CCs

In non-simultaneous case, the timer-based BWP switch on multiple CCs is triggered over partially overlapping time period.

The delay requirements for non-simultaneous timer based BWP switch on multiple CCs in this clause apply if the timing difference among the beginning of the slot where timer based BWP switching starts for all CCs is exceeds the MRTD for inter-band CA as defined in clause 7.6.4, and the BWP switch does not involve SCS change. The UE performs the non-simultaneous timer-based BWP switch on the CCs sequentially.

For non-simultaneous timer-based BWP switch, the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{\text{MultipleBWPswitchDelayTotal}}$ which starts from the beginning of DL slot n , where slot n is the first slot of a DL subframe (in FR1) or DL half-subframe (in FR2) immediately after the earliest BWP-inactivity timer *bwp-InactivityTimer* [2] expires.

$$T_{\text{MultipleBWPswitchDelayTotal}} = T_{\text{Delay}} + T_{\text{MultipleBWPswitchDelay}}$$

Where:

T_{Delay} is the time required to complete the ongoing timer-based BWP switching on other CCs.

$T_{\text{MultipleBWPswitchDelay}}$ is the timer-based BWP switch delay on current single CC defined in clause 8.6.2 or simultaneously triggered on multiple CCs defined in clause 8.6.2B.1.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{\text{MultipleBWPswitchDelayTotal}}$ after *bwp-InactivityTimer* [2] expires on the cell where timer-based BWP switch occurs.

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10 in the new BWP.
- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10 in the new BWP.

Provided the UE does not have the required activated TCI-state(s) information to receive PDCCH/ PDSCH and to transmit PUSCH/PUCCH/SRS in the new BWP, the UE shall use old TCI-state(s) before the BWP switch until a new MAC CE updating the required activated TCI-state(s) information is received after the BWP switch.

8.6.3 RRC based BWP switch delay on a single CC

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with one or more than one BWP configuration(s) configured, with

- Active BWP switch or parameter change of its active BWPs for SpCell
- Parameter change of its active BWPs except parameter *firstActiveDownlinkBWP-Id* and *firstActiveUplinkBWP-Id* for SCell

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWP, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n , where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$NR\ Slot\ length$ is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch if the BWP switch involves changing of SCS.

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in ms as defined in clause 11.2 in TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in ms as defined in clause 12 in TS 38.331 [2], and

$T_{BWPswitchDelayRRC} = 6ms$ is the time used by the UE to perform BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$ on the cell where RRC-based BWP switch occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.6.3A RRC based BWP switch delay on multiple CCs

The requirements in this clause only apply to the case when the same type of BWP switch (RRC based BWP switch) is performed on multiple CCs simultaneously or over partially overlapping time period.

The requirements in this clause shall apply:

- Active BWP switching or parameter change of its active BWPs for SpCell
- Parameter change of its active BWPs except parameter *firstActiveDownlinkBWP-Id* and *firstActiveUplinkBWP-Id* for SCells

8.6.3A.1 Simultaneous RRC based BWP switch delay on multiple CCs

Requirements in this clause apply only if RRC based BWP switching on multiple CCs for NR-CA is triggered by a single RRC command.

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWPs, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC} * (N - 1)}{NR\ slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3, and

$D_{RRC} = 0$ for UE which is capable of type 1 BWP switching delay depending on UE capability *bwp-SwitchingDelay* [2]. $D_{RRC} = D$ for UE which is capable of type 2 BWP switching delay depending on UE capability *bwp-SwitchingDelay* [2], where D is the incremental delay for each additional CC involved in simultaneous BWP switch and depends on UE capability [TS 38.306, 14].

N is the number of CCs within the NR-CA configured for performing simultaneous BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC} * (N - 1)$ on the cells where RRC-based BWP switch occurs.

8.6.3A.2 Non-simultaneous RRC based BWP switch delay on multiple CCs

In non-simultaneous case, the RRC-based BWP switch on multiple CCs is triggered over partially overlapping time period in different Cell groups. The delay requirements in this clause apply only if:

BWP switching on multiple CCs in different cell groups are triggered by separate RRC commands, and

UE is operating in NR-DC (FR1+FR2), and

UE is capable of per-FR gap, and

BWP switch does not involve SCS change.

For non-simultaneous RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWPs, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWPs on the serving cells on which BWP switch occurs on the first DL or UL slot right after a time duration of

$\frac{T_{Waiting} + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC} * (M - 1)}{NR\ slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot containing the RRC command,

$T_{Waiting}$ is the waiting time for RRC based BWP switch which is upper bounded by the ongoing BWP switch time in the first CG defined in clause 8.6.3A.1,

M is the number of CCs within the NR-CA configured for performing simultaneous BWP switch in the second CG; M=1 if the BWP switch is performed on single CC,

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3, and

D_{RRC} is defined in clause 8.6.3A.1.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC} * (M - 1)$ on the cells in the second CG where RRC-based BWP switch occurs.

8.6.4 BWP switch delay on Consistent UL CCA recovery

Upon detection of consistent UL CCA failure is slot#n in SpCell when UE detects *lbt-FailureInstanceMaxCount* number of CCA failure within *lbt-FailureDetectionTimer*, the UE shall switch the active UL BWP to an UL BWP configured with PRACH occasion and for which consistent CCA failure has not been triggered as defined in TS 38.321 clause 5.21 [7]. The UE shall be ready to transmit PRACH on the new UL BWP of the SpCell on the first UL slot occurs right after slot n + $T_{BWPswitchDelay} + 1$, where $T_{BWPswitchDelay}$ is defined in Table 8.6.2-1. The UE shall finish the UL BWP switch within the time duration $T_{BWPswitchDelay}$ depending on UE capability *bwp-SwitchingDelay* [2].

Note: Additional delay in acquiring the first available RACH occasion will be derived in a way similar to that in handover in clause 6.1B.1.

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{\text{BWPswitchDelay}}$ on the SpCell in the UL BWP switch. The UE is not required to follow the requirements defined in this clause when performing a UL BWP switch between the UL BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

8.6A Active BWP switch delay for RedCap

8.6A.1 Introduction

The requirements in this clause apply for RedCap UE. UE shall complete the switch of active DL and/or UL BWP within the delay defined in this clause.

8.6A.2 DCI and timer based BWP switch delay on a single CC

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with more than one BWP configurations configured.

For DCI-based BWP switch, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{\text{BWPswitchDelay}} + Y$ which starts from the beginning of DL slot n . Where,

- $Y=0$, if the serving cell where UE receives DCI for BWP switch request is same as the serving cell on which BWP switch occurs.
- Y equals to the length of 1 slot, if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell. In this scenario, $T_{\text{BWPswitchDelay}} + Y$ shall follow the smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{\text{BWPswitchDelay}}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

For timer-based BWP switch, the UE shall start BWP switch at DL slot n , where slot n is the first slot of a DL subframe (FR1) or DL half-subframe (FR2) immediately after a BWP-inactivity timer *bwp-InactivityTimer* [2] expires on a serving cell, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{\text{BWPswitchDelay}}$ which starts from the beginning of DL slot n .

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{\text{BWPswitchDelay}}$ after *bwp-InactivityTimer* [2] expires on the cell where timer-based BWP switch occurs.

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{\text{BWPswitchDelay}}$ defined in Table 8.6A.2-1.

Table 8.6A.2-1: BWP switch delay

μ	NR Slot length (ms)	BWP switch delay $T_{\text{BWPswitchDelay}}$ (slots)	
		Type 1 ^{Note 1}	Type 2 ^{Note 1}
0	1	1	3
1	0.5	2	5
2	0.25	3	9
3	0.125	6	18

Note 1:	Depends on UE capability.
Note 2:	If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch.

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10B in the new BWP.
- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10B in the new BWP.

If the BWP switch is triggered within or outside DRX active time, and one of the two BWPs in a BWP switching is a dormant BWP [TS 38.321, 7], UE shall be able to complete active BWP switching within the time duration of

- $T_{\text{dormantBWPswitchDelay}} = T_{\text{BWPswitchDelay}} + X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, or
- $T_{\text{dormantBWPswitchDelay}} = T_{\text{BWPswitchDelay}} + X + Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where
- $T_{\text{BWPswitchDelay}}$ is defined in Table 8.6.2-1 corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs;
- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs.
- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where UE receives dormancy indication.

For DCI-based BWP switch, if the new BWP is a dormant BWP, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive CSI-RS (for DL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL slot occurs right after a time duration of $T_{\text{dormantBWPswitchDelay}}$ which starts from the beginning of DL slot n .

8.6A.3 RRC based BWP switch delay on a single CC

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with one or more than one BWP configuration(s) configured, with

Active BWP switch or parameter change of its active BWPs for PCell

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWP, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ slots which begins from the beginning of DL slot n , where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

NR Slot length is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch if the BWP switch involves changing of SCS.

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in ms as defined in clause 11.2 in TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in ms as defined in clause 12 in TS 38.331 [2], and

$T_{BWPswitchDelayRRC} = 6ms$ is the time used by the UE to perform BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$ on the cell where RRC-based BWP switch occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.6C Active BWP switch delay for satellite access

Editor's note: Applicability of frequency range, CA, DA, duplex mode, inter-RAT measurement, etc is subject to updates/changes based on the scope of the corresponding WID.

Editor's note: Terminology will be further clarified and selected between, e.g. NTN and satellite access, based on further agreements.

8.6C.1 Introduction

The requirements in this clause apply for a UE configured with only PCell, which is served by satellite access node (SAN). The requirements in this clause also apply for a UE configured with more than one BWP on PCell.

UE shall complete the switch of active DL and/or UL BWP within the delay defined in this clause.

8.6C.2 DCI and timer based BWP switch delay on a single CC

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with more than one BWP configurations configured.

For DCI-based BWP switch, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay} + Y$ which starts from the beginning of DL slot n . Where,

- $Y=0$, if the serving cell where UE receives DCI for BWP switch request is same as the serving cell on which BWP switch occurs.
- Y equals to the length of 1 slot, if the serving cell where UE receives DCI for BWP switch is different from the serving cell on which BWP switch occurs for any involved serving cell. In this scenario, $T_{BWPswitchDelay} + Y$ shall follow the smaller SCS of scheduling cell, scheduled cells before and scheduled cells after active BWP change.

The UE is not required to transmit UL signals or receive DL signals until the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n except DCI triggering BWP switch on the cell where DCI-based BWP switch occurs. The UE is not required to follow the requirements defined in this clause when performing a DCI-based BWP switch between the BWPs in disjoint channel bandwidths or in partially overlapping channel bandwidths.

For timer-based BWP switch, the UE shall start BWP switch at DL slot n , where slot n is the first slot of a DL subframe (FR1) immediately after a BWP-inactivity timer *bwp-InactivityTimer* [2] expires on a serving cell, and the UE shall be able to receive PDSCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL or UL slot occurs right after a time duration of $T_{BWPswitchDelay}$ which starts from the beginning of DL slot n .

The UE is not required to transmit UL signals or receive DL signals during time duration $T_{BWPswitchDelay}$ after *bwp-InactivityTimer* [2] expires on the cell where timer-based BWP switch occurs.

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6C.2-1.

Table 8.6C.2-1: BWP switch delay

μ	NR Slot length (ms)	BWP switch delay $T_{\text{BWPswitchDelay}}$ (slots)	
		Type 1 ^{Note 1}	Type 2 ^{Note 1}
0	1	1	3
1	0.5	2	5
2	0.25	3	9
Note 1:		Depends on UE capability.	
Note 2:		If the BWP switch involves changing of SCS, the BWP switch delay is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch.	

Provided the UE does not have the required TCI-state information to receive PDCCH and PDSCH in the new BWP, the UE shall use old TCI-states before the BWP switch until a new MAC CE updating the required TCI-state information for PDCCH and PDSCH is received after the BWP switch.

If UE has the information on the required TCI-state information to receive PDCCH and PDSCH in the new BWP,

- UE shall be able to receive PDCCH and PDSCH with old TCI-states before the delay as specified in Clause 8.10C in the new BWP.
- UE shall be able to receive PDCCH and PDSCH with new TCI-states after the delay as specified in Clause 8.10C in the new BWP.

If the BWP switch is triggered within or outside DRX active time, and one of the two BWPs in a BWP switching is a dormant BWP [TS 38.321, 7], UE shall be able to complete active BWP switching within the time duration of

- $T_{\text{dormantBWPswitchDelay}} = T_{\text{BWPswitchDelay}} + X$, provided that the dormancy indication is received in any of the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, or
- $T_{\text{dormantBWPswitchDelay}} = T_{\text{BWPswitchDelay}} + X + Z$, provided that the dormancy indication is received after the first 3 OFDM symbols of a slot in the serving cell where DCI for dormancy indication is received, where
- $T_{\text{BWPswitchDelay}}$ is defined in Table 8.6C.2-1 corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs.
- X equals to the length of 1 slot corresponding to the smallest value among the SCS of the serving cell where UE receives dormancy indication and the SCSs of the dormant BWP and the active BWP immediately before or after switching the BWP of the serving cell where BWP switching occurs.
- Z equals to the length of 1 slot corresponding to the SCS of the serving cell where UE receives dormancy indication.

For DCI-based BWP switch, if the new BWP is a dormant BWP, after the UE receives BWP switching request at DL slot n on a serving cell, UE shall be able to receive CSI-RS (for DL active BWP switch) on the new BWP on the serving cell on which BWP switch on the first DL slot occurs right after a time duration of $T_{\text{dormantBWPswitchDelay}}$ which starts from the beginning of DL slot n .

8.6C.3 RRC based BWP switch delay on a single CC

The requirements in this clause only apply to the case that the BWP switch is performed on a single CC with one or more than one BWP configuration(s) configured, with

- Active BWP switch or parameter change of its active BWPs for PCell

For RRC-based BWP switch, after the UE receives RRC reconfiguration involving active BWP switching or parameter change of its active BWP, UE shall be able to receive PDSCH/PDCCH (for DL active BWP switch) or transmit PUSCH (for UL active BWP switch) on the new BWP on the serving cell on which BWP switch occurs on the first DL or UL slot right after a time duration of $\frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ slots which begins from the beginning of DL slot n , where

DL slot n is the last slot containing the RRC command, and

$NR\ Slot\ length$ is determined by the smaller SCS between the SCS before BWP switch and the SCS after BWP switch if the BWP switch involves changing of SCS.

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in ms as defined in clause 12 in TS 38.331 [2], and

$T_{BWPs witchDelayRRC} = 6ms$ is the time used by the UE to perform BWP switch.

The UE is not required to transmit UL signals or receive DL signals during the time defined by $T_{RRCprocessingDelay} + T_{BWPs witchDelayRRC}$ on the cell where RRC-based BWP switch occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.7 Void

8.8 NE-DC: E-UTRAN PSCell Addition and Release Delay

8.8.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to configure an E-UTRAN PSCell in NR - E-UTRA dual connectivity. The requirements are applicable to an NR - E-UTRA dual connectivity capable UE.

8.8.2 E-UTRAN PSCell Addition Delay Requirement

The requirements in this clause shall apply for the UE, which is configured with PCell, and may also be configured with one or more SCeLLs.

Upon receiving E-UTRAN PSCell addition in subframe n , the UE shall be capable to transmit PRACH preamble towards E-UTRAN PSCell no later than in subframe $n + T_{config_EUTRAN-PSCell}$:

Where:

$$T_{config_EUTRAN-PSCell} = T_{RRC_delay} + T_{activation_time} + 50ms + T_{E-UTRAN-PSCell_DU}$$

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [2].

$T_{activation_time}$ is the E-UTRAN PSCell activation delay. If the E-UTRAN PSCell is known, then $T_{activation_time}$ is 20ms. If the E-UTRAN PSCell is unknown, then $T_{activation_time}$ is 30ms provided the E-UTRAN PSCell can be successfully detected on the first attempt.

$T_{E-UTRAN-PSCell_DU}$ is the delay uncertainty in acquiring the first available PRACH occasion in the E-UTRAN PSCell. $T_{E-UTRAN-PSCell_DU}$ is up to 30ms.

E-UTRAN PSCell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the E-UTRAN PSCell configuration command:
 - the UE has sent a valid measurement report for the E-UTRAN PSCell being configured and
 - the E-UTRAN PSCell being configured remains detectable according to the cell identification conditions specified in clause 8.8 of TS 36.133 [15],
- E-UTRAN PSCell being configured also remains detectable during the E-UTRAN PSCell configuration delay $T_{config_EUTRAN-PSCell}$ according to the cell identification conditions specified in clause 8.8 of TS 36.133 [15].

otherwise it is unknown.

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.8.3 E-UTRAN PSCell Release Delay Requirement

also be configured with one or more SCells and/or E-UTRAN SCells.

Upon receiving E-UTRAN PSCell release in subframe n , the UE shall accomplish the release actions specified in TS 38.331 [2] no later than in subframe $n + T_{\text{RRC_delay}}$:

Where

$T_{\text{RRC_delay}}$ is the RRC procedure delay as specified in TS 38.331 [2].

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.9 NR-DC: PSCell Addition and Release Delay

8.9.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to configure an PSCell in NR dual connectivity. The requirements are applicable to an NR dual connectivity capable UE.

8.9.2 PSCell Addition Delay Requirement

The requirements in this clause shall apply for the UE configured with only PCell in FR1.

Upon receiving PSCell addition in subframe n , the UE shall be capable to transmit PRACH preamble towards PSCell in FR2 no later than in slot $n + \frac{T_{\text{config_PSCell}}}{\text{NR slot length}}$.

where:

$$T_{\text{config_PSCell}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search}} + T_{\Delta} + T_{\text{PSCell_DU}} + 2 \text{ ms}$$

$T_{\text{RRC_delay}}$ is the RRC procedure delay as specified in TS 38.331 [2].

$T_{\text{processing}}$ is the SW processing time needed by UE, including RF warm up period. $T_{\text{processing}} = 40 \text{ ms}$.

T_{search} is the time for AGC settling and PSS/SSS detection. If the target cell is known, $T_{\text{search}} = 0 \text{ ms}$. If the target cell is unknown and the target cell $\hat{E}_s/I_{\text{ot}} \geq -2\text{dB}$, $T_{\text{search}} = 3 \cdot N \cdot T_{\text{rs}}$ ms. $N = 8$ when the target cell is in FR2-1, and $N = 12$ when the target cell is in FR2-2

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = 1 \cdot T_{\text{rs}}$ ms for a known or unknown PSCell.

$T_{\text{PSCell_DU}}$ is the delay uncertainty in acquiring the first available PRACH occasion in the PSCell. $T_{\text{PSCell_DU}}$ is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [3].

T_{rs} is the SMTC periodicity of the target cell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{\text{rs}} = 5 \text{ ms}$ assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

In FR1 and FR2, the PSCell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the PSCell configuration command:
- the UE has sent a valid measurement report for the PSCell being configured and
- One of the SSBs measured from the PSCell being configured remains detectable according to the cell identification conditions specified in clause 9.3.
- One of the SSBs measured from PSCell being configured also remains detectable during the PSCell configuration delay $T_{\text{config_PSCell}}$ according to the cell identification conditions specified in clause 9.3.

otherwise it is unknown.

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.9.3 PSCell Release Delay Requirement

The requirements in this clause shall apply for a UE which is configured with PCell and one PSCell.

Upon receiving PSCell release in subframe n , the UE shall accomplish the release actions specified in TS 38.331 [2] no later than in slot $n + \frac{T_{RRC_delay}}{NR_slot_length}$:

where

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [2].

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.9A Conditional PSCell Addition Delay

8.9A.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to perform conditional PSCell addition in EN-DC or NR-DC. The requirements in this clause are applicable to EN-DC and NR-DC.

8.9A.2 Conditional PSCell Addition Delay Requirement

The requirements in this clause shall apply for the UE configured with only PCell in FR1.

Upon receiving conditional PSCell addition in subframe n , the UE shall be capable to transmit PRACH preamble towards PSCell no later than in subframe $n + T_{\text{config_PSCell_Addition_Conditional}}$:

Where:

$$T_{\text{config_PSCell_Addition_Conditional}} = T_{RRC_delay} + T_{\text{Event_DU}} + T_{\text{measure}} + T_{\text{UE_preparation}} + T_{\text{processing}} + T_{\Delta} + T_{\text{PSCell_DU}} + 2 \text{ ms}$$

T_{RRC_delay} is the RRC processing delay defined in Clause 11.2 in 38.331 [16] which is the corresponding RRC message embedded in E-UTRA RRC message, otherwise it is the RRC procedure delay defined in clause 12 in TS 38.331 [2] for processing the conditional PSCell addition command.

$T_{\text{Event_DU}}$ is the delay uncertainty which is the time from when the UE successfully decodes a conditional PSCell addition command until a condition exists at the measurement reference point which will trigger the conditional PSCell addition.

T_{measure} is the measurements time stated in clause 8.9A.2.1.

$T_{\text{UE_preparation}}$ is the UE preparation time for conditional PSCell addition, and starts after UE realizes the condition of PSCell addition is met and identity of the PSCell is determined. $T_{\text{UE_preparation}}$ is up to 10 ms.

$T_{\text{processing}}$ is the SW processing time needed by UE, including RF warm up period. $T_{\text{processing}} = 20 \text{ ms}$ when PSCell is in FR1, and $T_{\text{processing}} = 40 \text{ ms}$ when PSCell is in FR2.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = 1 \cdot T_{\text{Trs}}$ ms.

$T_{\text{PSCell_DU}}$ is the delay uncertainty in acquiring the first available PRACH occasion in the PSCell. $T_{\text{PSCell_DU}}$ is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [3].

T_{Trs} is the SMTC periodicity of the target cell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise T_{Trs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{\text{Trs}} = 5 \text{ ms}$ assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

The PCell interruption specified in clause 8.2 is allowed only after the UE starts to execute a conditional PSCell addition.

8.9A.2.1 Measurement time

The measurement time delay is defined from the end of $T_{\text{Event_DU}}$ until UE executes a PSCell addition and interruption time starts.

The measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{\text{identify_inter_without_index}}$ or $T_{\text{identify_inter_with_index}}$ defined in clause 9.3.4. When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{\text{identify_inter_without_index}}$ or $T_{\text{identify_inter_with_index}}$ for PSCell addition. If a cell, which has been detectable at least for the time period $T_{\text{identify_inter_without_index}}$ or $T_{\text{identify_inter_with_index}}$ for PSCell addition, becomes undetectable for a period and then the cell becomes detectable again and triggers a PSCell addition, the measurement time delay shall be less than $T_{\text{SSB_measurement_period_inter}}$ provided the timing to that cell has not changed more than $\pm 3200/2^\mu T_c$ while the measurement gap has not been available and the L3 filter has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

8.9B NR-DC: PSCell Addition and Release Delay in Carriers with CCA

8.9B.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to configure an PSCell in FR2-2 with CCA in NR dual connectivity. The requirements are applicable to an NR dual connectivity capable UE.

8.9B.2 PSCell Addition Delay Requirement

The requirements in this clause shall apply for the UE configured with only PCell in FR1.

Upon receiving PSCell addition in subframe n , the UE shall be capable to transmit PRACH preamble towards PSCell in FR2-2 no later than in slot $n + \frac{T_{\text{config_PSCell_CCA}}}{\text{NR slot length}}$.

where:

$$T_{\text{config_PSCell_CCA}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search_CCA}} + T_{\Delta_CCA} + T_{\text{PSCell_DU}} + 2 \text{ ms}$$

$T_{\text{RRC_delay}}$ is the RRC procedure delay as specified in TS 38.331 [2].

$T_{\text{processing}}$ is the SW processing time needed by UE, including RF warm up period. $T_{\text{processing}} = 40 \text{ ms}$.

$T_{\text{search_CCA}}$ is the time for AGC settling and PSS/SSS detection. If the target cell is known, $T_{\text{search}} = 0 \text{ ms}$. If the target cell is unknown and the target cell $\hat{E}_s/I_{\text{ot}} \geq -2\text{dB}$, $T_{\text{search}} = (3 \cdot N + L_1 \cdot N) \cdot T_{\text{rs}} \text{ ms}$, where L_1 is the number of SMTC occasions groups with at least one SSB/SMTC occasion in the group is not transmitted by the gNB during the AGC settling and PSS/SSS detection. N is the Rx beam sweeping factor for FR2-2.

T_{Δ_CCA} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = (1 + L_2) \cdot T_{\text{rs}} \text{ ms}$ for a known or unknown PSCell, where L_2 is the number of SMTC occasions not available at the UE during the time tracking period.

$T_{\text{PSCell_DU}}$ is the interruption uncertainty due to the random access procedure when sending PRACH to the new cell. $T_{\text{PSCell_DU}}$ can be up to: $(1 + L_3) \cdot T_{\text{SSB,RO}} + 10 \text{ ms}$ where $T_{\text{SSB,RO}}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [3] and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $L_3 = 0$ for Type 3 UL channel access procedure as defined in TS 37.213 [33]. $L_3 = 0$ if *ra-ChannelAccess-r17* is not configured in FR2-2.

T_{TS} is the SMTC periodicity of the target cell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise T_{TS} is the SMTC configured in the *measObjectNR* having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{TS} = 5$ ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.

NOTE 1: The interruption time considering the potential extensions caused by L_1 , L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2].

In FR2-2, the PSCell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the PSCell configuration command:
 - the UE has sent a valid measurement report for the PSCell being configured and
 - One of the SSBs measured from the PSCell being configured remains detectable according to the cell identification conditions specified in clause 9.3A.
- One of the SSBs measured from PSCell being configured also remains detectable during the PSCell configuration delay $T_{\text{config_PSCell_CCA}}$ according to the cell identification conditions specified in clause 9.3A.

otherwise it is unknown.

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.9B.3 PSCell Release Delay Requirement

The requirements in this clause shall apply for a UE which is configured with PCell in FR1 and one PSCell in FR2-2.

Upon receiving PSCell release in subframe n , the UE shall accomplish the release actions specified in TS 38.331 [2] no later than in slot $n + \frac{T_{RRC_delay}}{NR\ slot\ length}$.

where

- T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [2].

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.10 Active TCI state switching delay

8.10.1 Introduction

The requirements in this clause apply for a UE configured with one or more TCI state configurations on serving cell in MR-DC or standalone NR. UE shall complete the switch of active TCI state within the delay defined in this clause.

8.10.2 Known conditions for TCI state

The TCI state is known if the following conditions are met:

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target TCI state to the completion of active TCI state switch, where the RS resource for L1-RSRP measurement is the RS in target TCI state or QCLed to the target TCI state
 - TCI state switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
 - The UE has sent at least 1 L1-RSRP report for the target TCI state before the TCI state switch command
 - The TCI state remains detectable during the TCI state switching period

- The SSB associated with the TCI state remain detectable during the TCI switching period
- SNR of the TCI state $\geq -3\text{dB}$

Otherwise, the TCI state is unknown.

8.10.3 MAC-CE based TCI state switch delay

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE for indication of UE-specific PDCCH TCI state as defined in clause 6.1.3.15 of TS 38.321 [7] in slot n , UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + TO_k \cdot (T_{\text{first-SSB}} + T_{\text{SSB-proc}}) / NR \text{ slot length}$. The UE shall be able to receive PDCCH with the old TCI state until slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$. Where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3];

- $T_{\text{first-SSB}}$ is time to first SSB transmission after MAC CE command is decoded by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state
- $T_{\text{SSB-proc}} = 2 \text{ ms}$;
- $TO_k = 1$ if target TCI state is not in the active TCI state list for PDSCH, 0 otherwise.

If the target TCI state is unknown, upon receiving PDSCH carrying MAC-CE for indication of UE-specific PDCCH TCI state as defined in clause 6.1.3.15 of TS 38.321 [7] in slot n , UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + T_{\text{L1-RSRP}} + TO_{\text{uk}} \cdot (T_{\text{first-SSB}} + T_{\text{SSB-proc}}) / NR \text{ slot length}$. The UE shall be able to receive PDCCH with the old TCI state until slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$.

Where

- $T_{\text{L1-RSRP}} = 0$ in FR1 or when the TCI state switching not involving QCL-TypeD in FR2. Otherwise,
- $T_{\text{L1-RSRP}}$ is the time for Rx beam refinement in FR2, defined as
- $T_{\text{L1-RSRP_Measurement_Period_SSB}}$ for SSB as specified in clause 9.5.4.1,
 - with the assumption of $M=1$
 - with $T_{\text{Report}} = 0$
- $T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$ for CSI-RS as specified in clause 9.5.4.2
 - configured with higher layer parameter *repetition* set to ON
 - with the assumption of $M=1$ for periodic CSI-RS
 - for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
 - with $T_{\text{Report}} = 0$
- $TO_{\text{uk}} = 1$ for CSI-RS based L1-RSRP measurement, and 0 for SSB based L1-RSRP measurement when TCI state switching involves QCL-TypeD
- $TO_{\text{uk}} = 1$ when TCI state switching involves other QCL types only
- $T_{\text{first-SSB}}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{\text{first-SSB}}$ is time to first SSB transmission after MAC CE command is decoded by the UE for other QCL types;
- The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state

8.10.3A MAC-CE based TCI state switch delay in HST FR2 scenarios

For FR2 power class 6 UE, if the target TCI state is known, upon receiving PDSCH carrying MAC-CE for indication of UE-specific PDCCH TCI state as defined in clause 6.1.3.15 of TS 38.321 [7] in slot n , UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the symbol m of the first slot that is after slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + TO_k \cdot (T_{\text{first-SSB}} + T_{\text{SSB-proc}} + T_{\text{rs}} + T_{\text{rs-proc}}) / NR \text{ slot length}$. The UE shall be able to receive PDCCH with the old TCI state until slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$. Where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3];

- $T_{\text{first-SSB}}$ is time to first SSB transmission after MAC CE command is decoded by the UE;
- $T_{\text{SSB-proc}} = 2 \text{ ms}$;
- T_{rs} is time to the first TRS or SSB transmission after the SSB transmission in the definition of $T_{\text{first-SSB}}$ is processed by the UE;
- $T_{\text{rs-proc}} = 2 \text{ ms}$;
- $TO_k = 1$, $m = 0$ if target TCI state is not in the active TCI state list for PDSCH; otherwise $TO_k = 0$, $m = 1$.

For FR2 power class 6 UE, if the target TCI state is unknown, the same requirement for unknown target TCI state case specified in clause 8.10.3 applies.

8.10.4 DCI based TCI state switch delay

If the target TCI state is known, when a UE is configured with the higher layer parameter *tci-PresentInDCI* which is set as 'enabled' for the CORESET scheduling PDSCH at slot n , UE shall be able to receive PDSCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + \text{timeDurationForQCL}$, where, *timeDurationForQCL* is the time required by the UE to perform PDCCH reception and applying spatial QCL information received in DCI for PDSCH processing as described in TS 38.214 [26], the value of *timeDurationForQCL* is defined in TS 38.331 [2].

The known condition for TCI state defined in clause 8.10.2 is applied.

8.10.5 RRC based TCI state switch delay

If the target TCI state is known, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + (T_{\text{RRC-processing}} + TO_k \cdot (T_{\text{first-SSB}} + T_{\text{SSB-proc}})) / NR \text{ slot length}$. The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{\text{RRC-processing}}$ is the RRC processing delay defined in Clause 11.2 of TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in Clause 12 of TS 38.331 [2].
- $T_{\text{first-SSB}}$ is time to first SSB transmission after RRC processing by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state.
- $T_{\text{SSB-proc}}$ and TO_k are defined in clause 8.10.3.

If the target TCI state is unknown, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + (T_{\text{RRC-processing}} + T_{\text{L1-RSRP}} + TO_k \cdot (T_{\text{first-SSB}} + T_{\text{SSB-proc}})) / NR \text{ slot length}$. The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{\text{RRC_processing}}$ is the RRC processing delay defined in Clause 11.2 of TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in Clause 12 of TS 38.331 [2].
- $T_{\text{first-SSB}}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{\text{first-SSB}}$ is time to first SSB transmission after RRC processing time at the UE for other QCL types;
 - The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state
- $T_{\text{L1-RSRP}}$, TO_{uk} and $T_{\text{SSB-proc}}$ are defined in clause 8.10.3.

The requirements for RRC based TCI state switch delay apply when only 1 TCI state is configured in RRC TCI state list. When $T_{\text{HARQ}} > T_{\text{RRC_processing}}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.10.6 Active TCI state list update delay

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE for activation/deactivation of UE-specific PDSCH TCI state as defined in clause 6.1.3.14 of TS 38.321 [7] at slot n , UE shall be able to receive PDCCH to schedule PDSCH with the new target TCI state at the first slot that is after $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + TO_k \cdot (T_{\text{first-SSB}} + T_{\text{SSB-proc}}) / NR \text{ slot length}$. Where T_{HARQ} , $T_{\text{first-SSB}}$, $T_{\text{SSB-proc}}$ and TO_k are defined in clause 8.10.3.

8.10A Active TCI state switching delay with CCA

8.10A.1 Introduction

The requirements in this clause apply for a UE configured with one or more TCI state configurations on serving cell in EN-DC with PSCell on a carrier frequency with CCA or SA NR with PCell on a carrier frequency with CCA. UE shall complete the switch of active TCI state within the delay defined in this clause.

In the requirements of clause 8.10A, the term SSB occasion not available at the UE refers to when the SSB is configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SSB index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding period; otherwise the SSB occasion is considered as available at the UE.

8.10A.2 Known conditions for TCI state

The TCI state is known if the following conditions are met:

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target TCI state to the completion of active TCI state switch, where the RS resource for L1-RSRP measurement is the RS in target TCI state or QCLed to the target TCI state
 - TCI state switch command is received within 1280 ms of the last transmission of the RS resource for beam reporting or measurement
 - The UE has sent at least 1 L1-RSRP report for the target TCI state before the TCI state switch command
 - The TCI state remain detectable during the TCI state switching period in the SSB occasions available at the UE
 - The SSB associated with the TCI state remain detectable during the TCI switching period in the SSB occasions available at the UE
 - SNR of the TCI state is $\geq -3\text{dB}$

Otherwise, the TCI state is unknown.

8.10A.3 MAC-CE based TCI state switch delay

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE for indication of UE-specific PDCCH TCI state as defined in clause 6.1.3.15 of TS 38.321 [7] at slot n , UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{HARQ}} + T_{O_k} * (T_{\text{first-SSB}} + T_{\text{SSB-proc}} + T_{\text{SSB}} * L_{\text{MAC,known}})) / NR \text{ slot length}$. The UE shall be able to receive on the old TCI state until slot $n + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{HARQ}} + T_{O_k} * (T_{\text{first-SSB}} + T_{\text{SSB}} * L_{\text{MAC,known}})) / NR \text{ slot length}$, where

T_{HARQ} (in ms) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3]. In the event of UE not being able to transmit the acknowledgment due to UL CCA failures: T_{HARQ} is extended to also include the time to all next HARQ feedback transmissions and retransmission opportunities, until the time of its successful transmission, as specified in TS 38.213 [3]; no extension of T_{HARQ} due to UL CCA failures is allowed for Type 2C UL channel access in TS 37.213;

$T_{\text{first-SSB}}$ is time to first SSB transmission occasion after MAC CE command is decoded by the UE, during which some SSB occasions may not be available at the UE due to DL CCA failures;

The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state;

$T_{\text{SSB-proc}} = 2 \text{ ms}$;

$T_{O_k} = 1$ if target TCI state is not in the active TCI state list for PDSCH, 0 otherwise;

$T_{\text{SSB}} = \text{ssb-periodicityServingCell}$;

$L_{\text{MAC,known}} \leq L_{\text{MAC,known,max}}$ is the corresponding number of SSB occasions not available at the UE;

$L_{\text{MAC,known,max}} = 2$ for $T_{\text{SSB}} \leq 40 \text{ ms}$, $L_{\text{MAC,known,max}} = 1$ for $T_{\text{SSB}} > 40 \text{ ms}$.

If the target TCI state is unknown, upon receiving PDSCH carrying MAC-CE for indication of UE-specific PDCCH TCI state as defined in clause 6.1.3.15 of TS 38.321 [7] at slot n , UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{HARQ}} + T_{L1\text{-RSRP}} + T_{O_{uk}} * (T_{\text{first-SSB}} + T_{\text{SSB-proc}} + T_{\text{SSB}} * L_{\text{MAC,unknown}})) / NR \text{ slot length}$. The UE shall be able to receive on the old TCI state until slot $n + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{HARQ}} + T_{O_{uk}} * (T_{\text{first-SSB}} + T_{\text{SSB}} * L_{\text{MAC,unknown}})) / NR \text{ slot length}$,

Where:

- $L_{\text{MAC,unknown}} \leq L_{\text{MAC,unknown,max}}$ is the corresponding number of SSB occasions groups not available at the UE;
- $L_{\text{MAC,unknown,max}} = 2$ for $T_{\text{SSB}} \leq 40 \text{ ms}$, $L_{\text{MAC,unknown,max}} = 1$ for $T_{\text{SSB}} > 40 \text{ ms}$;
- $T_{O_{uk}} = 1$.
- $T_{L1\text{-RSRP}} = 0$ in FR1 or when the TCI state switching not involving QCL-TypeD in FR2-2. Otherwise,
- $T_{L1\text{-RSRP}}$ is the time for Rx beam refinement in FR2-2, defined as
- $T_{L1\text{-RSRP_Measurement_Period_SSB_CCA}}$ for SSB as specified in clause 9.5A.4.1,
 - with the assumption of $M=1$
 - with $T_{\text{Report}} = 0$
- $T_{O_{uk}} = 0$ for SSB based L1-RSRP measurement when TCI state switching involves QCL-TypeD
- $T_{O_{uk}} = 1$ when TCI state switching involves other QCL types only
- $T_{\text{first-SSB}}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{\text{first-SSB}}$ is time to first SSB transmission after MAC CE command is decoded by the UE for other QCL types;
- The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state

8.10A.4 DCI based TCI state switch delay

If the target TCI state is known, when a UE is configured with the higher layer parameter *tci-PresentInDCI* which is set as 'enabled' for the CORESET scheduling the PDSCH at slot n , UE shall be able to receive PDSCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + \text{timeDurationForQCL}$, where, *timeDurationForQCL* is the time required by the UE to perform PDCCH reception and applying spatial QCL information received in DCI for PDSCH processing as described in TS 38.214 [26], the value of *timeDurationForQCL* is defined in TS 38.306 [14].

The known condition for TCI state defined in clause 8.10A.2 is applied.

8.10A.5 RRC based TCI state switch delay

If the target TCI state is known, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + (T_{\text{RRC_processing}} + T_{\text{Ok}} * (T_{\text{first-SSB}} + T_{\text{SSB-proc}} + T_{\text{SSB}} * L_{\text{RRC,known}})) / \text{NR slot length}$. The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

Where

- Slot n is last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{\text{RRC_processing}}$ is the RRC processing delay defined in Clause 11.2 of 36.331 [16] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in Clause 12 of TS38.331 [2]
- $T_{\text{first-SSB}}$ is time to first SSB transmission occasion after RRC processing by the UE, during which some of the SSB occasions may not be available due to DL CCA failures;
 - The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state;
- $L_{\text{RRC,known}} \leq L_{\text{RRC,known,max}}$ is the corresponding number of SSB occasions not available at the UE;
 - $L_{\text{RRC,known,max}} = 2$ for $T_{\text{SSB}} \leq 40$ ms, $L_{\text{RRC,known,max}} = 1$ for $T_{\text{SSB}} > 40$ ms.
- $T_{\text{SSB-proc}}$, T_{Ok} , and T_{SSB} are as defined in clause 8.10A.3.

If the target TCI state is unknown, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + (T_{\text{RRC_processing}} + T_{\text{L1-RSRP}} + T_{\text{Ok}} * (T_{\text{first-SSB}} + T_{\text{SSB-proc}} + T_{\text{SSB}} * L_{\text{RRC,unknown}})) / \text{NR slot length}$. The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

Where,

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{\text{RRC_processing}}$ is the RRC processing delay defined in Clause 11.2 of 36.331 [16] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in Clause 12 of TS38.331 [2].
- $T_{\text{first-SSB}}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{\text{first-SSB}}$ is time to first SSB transmission occasion after RRC processing time at the UE for other QCL types, during which some SSB occasions may not be available at the UE due to DL CCA failures;
 - The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state;
- $L_{\text{RRC,unknown}} \leq L_{\text{RRC,unknown,max}}$ is the corresponding number of SSB occasions not available at the UE;
 - $L_{\text{RRC,unknown,max}} = 2$ for $T_{\text{SSB}} \leq 40$ ms, $L_{\text{RRC,unknown,max}} = 1$ for $T_{\text{SSB}} > 40$ ms.
- $T_{\text{L1-RSRP}}$, T_{Ok} , $T_{\text{SSB-proc}}$, and T_{SSB} are as defined in clause 8.10A.3

The requirements for RRC based TCI state switch delay apply when only 1 TCI state is configured in RRC TCI state list. When $T_{HARQ} > T_{RRC_processing}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.10A.6 Active TCI state list update delay

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE for activation/deactivation of UE-specific PDSCH TCI state as defined in clause 6.1.3.14 of TS 38.321 [7] at slot n , UE shall be able to receive PDCCH to schedule PDSCH with the new target TCI state at the first slot that is after $n + 3N_{slot}^{subframe,\mu} + (T_{HARQ} + TO_k * (T_{first-SSB} + T_{SSB-proc} + T_{SSB} * L_{MAC,known})) / NR\ slot\ length$. Where T_{HARQ} , $T_{first-SSB}$, $T_{SSB-proc}$, T_{SSB} , $L_{MAC,known}$ and TO_k are as defined in clause 8.10A.3.

8.10B Active TCI state switching delay for RedCap

8.10B.1 Introduction

The requirements in this clause apply for a RedCap UE configured with one or more TCI state configurations on serving cell in standalone NR. UE shall complete the switch of active TCI state within the delay defined in this clause.

8.10B.2 Known conditions for TCI state

The TCI state is known if the following conditions are met:

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target TCI state to the completion of active TCI state switch, where the RS resource for L1-RSRP measurement is the RS in target TCI state or QCLed to the target TCI state
- TCI state switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
- The UE has sent at least 1 L1-RSRP report for the target TCI state before the TCI state switch command
- The TCI state remains detectable during the TCI state switching period
- The SSB associated with the TCI state remain detectable during the TCI switching period
- SNR of the TCI state ≥ -3 dB

Otherwise, the TCI state is unknown.

8.10B.3 MAC-CE based TCI state switch delay

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE for indication of UE-specific PDCCH TCI state as defined in clause 6.1.3.15 of TS 38.321 [7] in slot n , UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu} + TO_k * (T_{first-SSB} + T_{SSB-proc}) / NR\ slot\ length$. The UE shall be able to receive PDCCH with the old TCI state until slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu}$. Where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3];

- $T_{first-SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state
- $T_{SSB-proc} = 2\ ms$;
- $TO_k = 1$ if target TCI state is not in the active TCI state list for PDSCH, 0 otherwise.

If the target TCI state is unknown, upon receiving PDSCH carrying MAC-CE for indication of UE-specific PDCCH TCI state as defined in clause 6.1.3.15 of TS 38.321 [7] in slot n , UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu} + T_{L1-}$

$\text{RSRP} + T_{\text{O}_{\text{uk}}} * (T_{\text{first-SSB}} + T_{\text{SSB-proc}}) / \text{NR slot length}$. The UE shall be able to receive PDCCH with the old TCI state until slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe}, \mu}$.

Where

- $T_{\text{L1-RSRP}} = 0$ in FR1 or when the TCI state switching not involving QCL-TypeD in FR2. Otherwise,
- $T_{\text{L1-RSRP}}$ is the time for Rx beam refinement in FR2, defined as
- $T_{\text{L1-RSRP_Measurement_Period_SSB_RedCap}}$ for SSB as specified in clause 9.5B.4.1,
 - with the assumption of $M=1$
 - with $T_{\text{Report}} = 0$
- $T_{\text{L1-RSRP_Measurement_Period_CSI-RS_RedCap}}$ for CSI-RS as specified in clause 9.5B.4.2
 - configured with higher layer parameter *repetition* set to ON
 - with the assumption of $M=1$ for periodic CSI-RS
 - for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
 - with $T_{\text{Report}} = 0$
- $T_{\text{O}_{\text{uk}}} = 1$ for CSI-RS based L1-RSRP measurement, and 0 for SSB based L1-RSRP measurement when TCI state switching involves QCL-TypeD
- $T_{\text{O}_{\text{uk}}} = 1$ when TCI state switching involves other QCL types only
- $T_{\text{first-SSB}}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{\text{first-SSB}}$ is time to first SSB transmission after MAC CE command is decoded by the UE for other QCL types;
- The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state

8.10B.4 DCI based TCI state switch delay

If the target TCI state is known, when a UE is configured with the higher layer parameter *tci-PresentInDCI* which is set as 'enabled' for the CORESET scheduling PDSCH at slot n , UE shall be able to receive PDSCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + \text{timeDurationForQCL}$, where, *timeDurationForQCL* is the time required by the UE to perform PDCCH reception and applying spatial QCL information received in DCI for PDSCH processing as described in TS 38.214 [26], the value of *timeDurationForQCL* is defined in TS 38.331 [2].

The known condition for TCI state defined in clause 8.10.2 is applied.

8.10B.5 RRC based TCI state switch delay

If the target TCI state is known, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + (T_{\text{RRC_processing}} + T_{\text{O}_k} * (T_{\text{first-SSB}} + T_{\text{SSB-proc}})) / \text{NR slot length}$. The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{\text{RRC_processing}}$ is the RRC processing delay defined in Clause 11.2 of TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in Clause 12 of TS 38.331 [2].
- $T_{\text{first-SSB}}$ is time to first SSB transmission after RRC processing by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state.

- $T_{SSB\text{-}proc}$ and TO_k are defined in clause 8.10B.3.

If the target TCI state is unknown, UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + (T_{RRC_processing} + T_{L1\text{-}RSRP} + TO_k * (T_{first\text{-}SSB} + T_{SSB\text{-}proc})) / NR\ slot\ length$. The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{RRC_processing}$ is the RRC processing delay defined in Clause 11.2 of TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in Clause 12 of TS 38.331 [2].
- $T_{first\text{-}SSB}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{first\text{-}SSB}$ is time to first SSB transmission after RRC processing time at the UE for other QCL types;
 - The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state
- $T_{L1\text{-}RSRP}$, TO_k and $T_{SSB\text{-}proc}$ are defined in clause 8.10B.3.

The requirements for RRC based TCI state switch delay apply when only 1 TCI state is configured in RRC TCI state list. When $T_{HARQ} > T_{RRC_processing}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.10B.6 Active TCI state list update delay

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE for activation/deactivation of UE-specific PDSCH TCI state as defined in clause 6.1.3.14 of TS 38.321 [7] at slot n , UE shall be able to receive PDCCH to schedule PDSCH with the new target TCI state at the first slot that is after $n + T_{HARQ} + 3N_{slot}^{subframe,\mu} + TO_k * (T_{first\text{-}SSB} + T_{SSB\text{-}proc}) / NR\ slot\ length$. Where T_{HARQ} , $T_{first\text{-}SSB}$, $T_{SSB\text{-}proc}$ and TO_k are defined in clause 8.10B.3.

8.10C Active TCI state switching delay for satellite access

8.10C.1 Introduction

The requirements in this clause apply for a UE configured with one or more TCI state configurations on Pcell in satellite access. UE shall complete the switch of active TCI state within the delay defined in this clause.

8.10C.2 MAC-CE based TCI state switch delay

Upon receiving PDSCH carrying MAC-CE for indication of UE-specific PDCCH TCI state as defined in clause 6.1.3.15 of TS 38.321 [7] in slot n , UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu} + TO_k * (T_{first\text{-}SSB} + T_{SSB\text{-}proc}) / NR\ slot\ length$. The UE shall be able to receive PDCCH with the old TCI state until slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu}$. Where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3];

- $T_{first\text{-}SSB}$ is time to first SSB transmission after MAC CE command is decoded by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state
- $T_{SSB\text{-}proc} = 2\ ms$;
- $TO_k = 1$ if target TCI state is not in the active TCI state list for PDSCH, 0 otherwise.

8.10C.4 DCI based TCI state switch delay

When a UE is configured with the higher layer parameter *tcI-PresentInDCI* which is set as 'enabled' for the CORESET scheduling PDSCH at slot n , UE shall be able to receive PDSCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + \text{timeDurationForQCL}$, where, *timeDurationForQCL* is the time required by the UE to perform PDCCH reception and applying spatial QCL information received in DCI for PDSCH processing as described in TS 38.214 [26], the value of *timeDurationForQCL* is defined in TS 38.331 [2].

8.10C.5 RRC based TCI state switch delay

UE shall be able to receive PDCCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + (T_{\text{RRC_processing}} + \text{TO}_k * (T_{\text{first-SSB}} + T_{\text{SSB-proc}})) / \text{NR slot length}$, The UE is not required to receive PDCCH/PDSCH/CSI-RS or transmit PUCCH/PUSCH until the end of switching period.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command.
- $T_{\text{RRC_processing}}$ is the RRC processing delay defined in Clause 12 of TS 38.331 [2].
- $T_{\text{first-SSB}}$ is time to first SSB transmission after RRC processing by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state.
- $T_{\text{SSB-proc}}$ and TO_k are defined in clause 8.10C.2.

The requirements for RRC based TCI state switch delay apply when only 1 TCI state is configured in RRC TCI state list. When $T_{\text{HARQ}} > T_{\text{RRC_processing}}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.10C.6 Active TCI state list update delay

Upon receiving PDSCH carrying MAC-CE for activation/deactivation of UE-specific PDSCH TCI state as defined in clause 6.1.3.14 of TS 38.321 [7] at slot n , UE shall be able to receive PDCCH to schedule PDSCH with the new target TCI state at the first slot that is after $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe}, \mu} + \text{TO}_k * (T_{\text{first-SSB}} + T_{\text{SSB-proc}}) / \text{NR slot length}$. Where T_{HARQ} , $T_{\text{first-SSB}}$, $T_{\text{SSB-proc}}$ and TO_k are defined in clause 8.10C.2.

8.11 PSCell Change

This clause defines requirements for the delay within which the UE shall be able to change PSCell to other cell in EN-DC or NR-DC. The requirements in this clause are applicable to EN-DC and NR-DC.

The UE shall be capable of transmitting PRACH preamble towards the target PSCell no later than specified in clause 8.9.2 for the case of NR-DC and in TS 36.133 clause 7.31.2 for the case of EN-DC,, where the following values for slot n , $T_{\text{processing}}$ and $T_{\text{RRC_delay}}$ shall override the existing ones:

- Slot n is the last slot overlapping with the PDSCH containing PSCell change,
- $T_{\text{processing}} = 20$ ms when source and target cells are in the same FR,
- $T_{\text{processing}} = 40$ ms when source and target cells are in different FRs.
- $T_{\text{RRC_delay}}$ is the RRC procedure delay as specified in TS 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC procedure delay as specified in TS 38.331 [2].

If the SMTC periodicity of the target cell is not provided within the PSCell change message, and measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, T_{rs} is the periodicity of one of the SMTC which is up to UE implementation.

The target PSCell is known if it has been meeting the conditions in clause 8.9.2 for the case of NR-DC and in TS36.133 clause 7.31.2 for the case of EN-DC.

The interruption on PCell and other serving cells specified in TS36.133 clause 7.32.2.1 for EN-DC and in TS38.133 clause 8.2.4.2.1 for NR-DC is allowed only during the RRC reconfiguration procedure [2].

8.11A PSCell Change in Carriers with CCA

This clause defines requirements for the delay within which the UE shall be able to change PSCell in FR2-2 with CCA to other cell in NR-DC. The requirements in this clause are applicable to NR-DC.

The UE shall be capable of transmitting PRACH preamble towards the target PSCell no later than specified in clause 8.9A.2 for the case of NR-DC, where the following values for slot n , $T_{\text{processing}}$ and $T_{\text{RRC_delay}}$ shall override the existing ones:

- Slot n is the last slot overlapping with the PDSCH containing PSCell change,
- $T_{\text{processing}} = 20$ ms when source and target cells are in the same FR,
- $T_{\text{processing}} = 40$ ms when source and target cells are in different FRs.
- $T_{\text{RRC_delay}}$ is the RRC procedure delay as specified in TS 38.331 [2].

If the SMTC periodicity of the target cell is not provided within the PSCell change message, and measObjectNRs having the same SSB frequency and subcarrier spacing configured by MN and SN have different SMTC, T_{TS} is the periodicity of one of the SMTC which is up to UE implementation.

The target PSCell is known if it has been meeting the conditions in clause 8.9A.2 for the case of NR-DC.

The interruption on PCell and other serving cells specified in TS38.133 clause 8.2.4.2.1 for NR-DC is allowed only during the RRC reconfiguration procedure [2].

8.11B Conditional PSCell Change

8.11B.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to perform conditional PSCell change in EN-DC or NR-DC. The requirements in this clause are applicable to EN-DC and NR-DC.

8.11B.2 Conditional PSCell Change delay

The requirements in this clause shall apply for the UE configured with only PCell in FR1.

The UE shall be capable to transmit PRACH preamble towards the new target PSCell no later than in slot $n + T_{\text{config_PSCell_Conditional}}$:

Where:

- Slot n is the last slot overlapping with the PDSCH containing conditional PSCell change.
- $T_{\text{config_PSCell_Conditional}} = T_{\text{RRC_delay}} + T_{\text{Event_DU}} + T_{\text{measure}} + T_{\text{UE_preparation}} + T_{\text{processing}} + T_{\Delta} + T_{\text{PSCell_DU}} + 2$ ms
- $T_{\text{RRC_delay}}$ is the RRC processing delay defined in Clause 11.2 in 36.331 [16] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC procedure delay defined in clause 12 in TS 38.331 [2] for processing the conditional PSCell change command.
- $T_{\text{Event_DU}}$ is the delay uncertainty which is the time from when the UE successfully decodes a conditional PSCell change command until a condition exists at the measurement reference point which will trigger the conditional PSCell change.
- T_{measure} is the measurements time stated in clause 8.11B.2.1.
- $T_{\text{UE_preparation}}$ is the UE preparation time for conditional PSCell change, and starts after UE realizes the condition of PSCell change is met and identity of new PSCell is determined. $T_{\text{UE_preparation}}$ is up to 10ms.
- $T_{\text{processing}}$ is the SW processing time needed by UE, including RF warm up period. $T_{\text{processing}} = 20$ ms when source and target cells are in the same FR, and $T_{\text{processing}} = 40$ ms when source and target cells are in different FRs.

- T_{Δ} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = 1 \cdot T_{rs}$ ms.
- T_{rs} is the SMTC periodicity of the target cell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{rs} = 5$ ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.
- T_{PSCell_DU} is the delay uncertainty in acquiring the first available PRACH occasion in the PSCell. T_{PSCell_DU} is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [3].

The PCell interruption specified in clause 8.2 is allowed only after the UE starts to execute a conditional PSCell change.

8.11B.2.1 Measurement time

The measurement time delay is defined from the end of T_{Event_DU} until UE executes a PSCell change to a target cell and interruption time starts.

For intra-frequency PSCell change, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify_intra_with_index}$ or $T_{identify_intra_without_index}$ defined in clause 9.2.5.1 or clause 9.2.6.2.

For inter-frequency PSCell change, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{identify_inter_without_index}$ or $T_{identify_inter_with_index}$ defined in clause 9.3.4. When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency PSCell change or the time period $T_{identify_inter_without_index}$ or $T_{identify_inter_with_index}$ for inter-frequency PSCell change. If a cell, which has been detectable at least for the time period $T_{identify_intra_without_index}$ or $T_{identify_intra_with_index}$ for intra-frequency PSCell change or the time period $T_{identify_inter_without_index}$ or $T_{identify_inter_with_index}$ for inter-frequency PSCell change, becomes undetectable for a period and then the cell becomes detectable again and triggers a PSCell change, the measurement time delay shall be less than $T_{SSB_measurement_period_intra}$ or $T_{SSB_measurement_period_inter}$ provided the timing to that cell has not changed more than $\pm 3200/2^{\mu}$ Tc while the measurement gap has not been available and the L3 filter has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

8.11D Conditional PSCell Change in Carriers with CCA

8.11D.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to perform conditional PSCell in FR2-2 with CCA change in NR-DC. The requirements in this clause are applicable to NR-DC.

8.11D.2 Conditional PSCell Change delay

The requirements in this clause shall apply for the UE configured with only PCell in FR1.

The UE shall be capable to transmit PRACH preamble towards the new target PSCell no later than in slot $n + \frac{T_{config_PSCell_Conditional}}{NR_slot_length}$.

Where:

- Slot n is the last slot overlapping with the PDSCH containing conditional PSCell change.
- $T_{config_PSCell_Conditional} = T_{RRC_delay} + T_{Event_DU} + T_{measure_CCA} + T_{UE_preparation} + T_{processing} + T_{\Delta_CCA} + T_{PSCell_DU} + 2$ ms
- T_{RRC_delay} is the RRC procedure delay defined in clause 12 in TS 38.331 [2] for processing the conditional PSCell change command.

- $T_{\text{Event_DU}}$ is the delay uncertainty which is the time from when the UE successfully decodes a conditional PSCell change command until a condition exists at the measurement reference point which will trigger the conditional PSCell change.
- $T_{\text{measure_CCA}}$ is the measurements time stated in clause 8.11D.2.1.
- $T_{\text{UE_preparation}}$ is the UE preparation time for conditional PSCell change, and starts after UE realizes the condition of PSCell change is met and identity of new PSCell is determined. $T_{\text{UE_preparation}}$ is up to 10ms.
- $T_{\text{processing}}$ is the SW processing time needed by UE, including RF warm up period. $T_{\text{processing}} = 20$ ms when source and target cells are in the same FR, and $T_{\text{processing}} = 40$ ms when source and target cells are in different FRs.
- T_{Δ_CCA} is time for fine time tracking and acquiring full timing information of the target cell. $T_{\Delta} = (1+L_2) * T_{\text{rs}}$ ms, where L_2 is the number of SMTC occasions not available at the UE during the time tracking period.
- T_{rs} is the SMTC periodicity of the target cell if the UE has been provided with an SMTC configuration for the target cell in PSCell addition message, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{\text{rs}} = 5$ ms assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5 ms.
- $T_{\text{PSCell_DU}}$ is the interruption uncertainty due to the random access procedure when sending PRACH to the new cell. $T_{\text{PSCell_DU}}$ can be up to: $(1+L_3) * T_{\text{SSB_RO}} + 10$ ms where $T_{\text{SSB_RO}}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [3] and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $L_3 = 0$ for Type 3 UL channel access procedure as defined in TS 37.213 [33].

NOTE 1: The interruption time considering the potential extensions caused by L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2].

The PCell interruption specified in clause 8.2 is allowed only after the UE starts to execute a conditional PSCell change.

8.11D.2.1 Measurement time

The measurement time delay is defined from the end of $T_{\text{Event_DU}}$ until UE executes a PSCell change to a target cell and interruption time starts.

For intra-frequency PSCell change, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{\text{identify_intra_cca_with_index}}$ or $T_{\text{identify_intra_cca_without_index}}$ defined in clause 9.2A.5.1 or clause 9.2A.6.2.

For inter-frequency PSCell change, the measurement time delay measured without Time To Trigger (TTT) and L3 filtering shall be less than $T_{\text{identify_inter_cca_without_index}}$ or $T_{\text{identify_inter_cca_with_index}}$ defined in clause 9.3A.4. When TTT or L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{\text{identify_intra_cca_without_index}}$ or $T_{\text{identify_intra_cca_with_index}}$ for intra-frequency PSCell change or the time period $T_{\text{identify_inter_cca_without_index}}$ or $T_{\text{identify_inter_cca_with_index}}$ for inter-frequency PSCell change. If a cell, which has been detectable at least for the time period $T_{\text{identify_intra_cca_without_index}}$ or $T_{\text{identify_intra_cca_with_index}}$ for intra-frequency PSCell change or the time period $T_{\text{identify_inter_cca_without_index}}$ or $T_{\text{identify_inter_cca_with_index}}$ for inter-frequency PSCell change, becomes undetectable for a period and then the cell becomes detectable again and triggers a PSCell change, the measurement time delay shall be less than $T_{\text{SSB_measurement_period_intra_cca}}$ or $T_{\text{SSB_measurement_period_inter_cca}}$ provided the timing to that cell has not changed more than $\pm 3200 T_c$ while the measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used, an additional delay can be expected.

8.12 Uplink spatial relation switch delay

8.12.1 Introduction

The requirements in this clause apply for a UE configured with one or more spatial relation configurations on serving cell in MR-DC or standalone NR. There is no requirement when the UE is requested to switch to a spatial relation with the higher layer parameter *spatialRelationInfo* associated to SRS. UE shall complete the switch of active spatial relation within the delay defined in this clause when the UE is requested to switch to a spatial relation with the higher layer parameter *spatialRelationInfo* associated to a DL RS.

8.12.2 Known conditions for spatial relation when associated with DL-RS

The spatial relation associated to DL RS is known if the following conditions are met:

- During the period from the last transmission of the DL RS resource used for the L1-RSRP measurement reporting for the target spatial relation to the completion of active spatial relation switch, where the DL RS resource for L1-RSRP measurement is the DL RS in target spatial relation or QCLed to the target spatial relation with QCL type-D.
- Spatial relation switch command is received within 1280 ms upon the last transmission of the DL RS resource for beam reporting or measurement
- The UE has sent at least 1 L1-RSRP report for the target spatial relation before the spatial relation switch command
- The DL RS configured in spatial relation remains detectable during the spatial relation switching period
 - SNR of the DL RS configured in spatial relation $\geq -3\text{dB}$
- The SSB associated with the spatial relation remain detectable during the spatial relation switching period
 - SNR of the SSB associated with the spatial relation $\geq -3\text{dB}$

Otherwise, the spatial relation is unknown.

8.12.3 MAC-CE based spatial relation switch delay

If the target spatial relation associated to DL RS is known, upon receiving PDSCH carrying MAC-CE activation command in slot n , for UL spatial relation switch for PUCCH or semi-persistent SRS transmission of serving cell with a target UL spatial relation, the UE shall be able to transmit PUCCH or semi-persistent SRS with the target UL spatial relation in the slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + 1$ when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1 where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3].

If the target spatial relation associated to DL RS is unknown, upon receiving PDSCH carrying MAC-CE activation command in slot n , for UL spatial relation switch for PUCCH or semi-persistent SRS transmission of serving cell with a target UL spatial relation, the UE shall be able to transmit PUCCH or semi-persistent SRS with the target UL spatial relation in the slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + T_{\text{L1-RSRP}} + 1$ when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3],
- $T_{\text{L1-RSRP}}$ is the time for Rx beam refinement in FR2, defined as
 - $T_{\text{L1-RSRP_Measurement_Period_SSB}}$ for SSB as specified in clause 9.5.4.1,
 - with the assumption of $M=1$
 - with $T_{\text{Report}} = 0$
 - $T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$ for CSI-RS as specified in clause 9.5.4.2

- configured with higher layer parameter *repetition* set to ON
- with the assumption of $M=1$ for periodic CSI-RS
- for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
- with $T_{\text{Report}} = 0$

The UE shall be able to transmit with the old UL spatial relation until slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe}, \mu}$.

When the UL spatial relation info switch for PUCCH changes both the associated DL RS and *pucch-PathlossReferenceRS* with the same MAC-CE activation, and if both the DL RS and *pucch-PathlossReferenceRS* are known as specified in clause 8.12.2 and 8.14.2 respectively, the UE shall be able to transmit PUCCH with the target UL spatial relation after the delay specified in clause 8.14.3. If either the associated DL RS or *pucch-PathlossReferenceRS* are unknown, a longer switching delay is allowed. The UE is not required to transmit PUCCH with the target UL spatial relation until the DL RS and pathloss reference RS switch are completed.

8.12.4 DCI based spatial relation switch delay

If the target spatial relation associated to DL RS is known, when a UE receives the DCI triggering aperiodic SRS at slot n with the higher layer parameter *spatialRelationInfo*, UE shall be able to transmit aperiodic SRS with target spatial

relation of the serving cell on which spatial relation switch occurs in the slot $\left\lceil n \cdot \frac{2^{\mu_{\text{SRS}}}}{2^{\mu_{\text{PDCCH}}}} \right\rceil + k + 1$, where, k is configured

via higher layer parameter *slotOffset*[2] for each triggered SRS resources set and is based on the subcarrier spacing of the triggered SRS transmission, μ_{SRS} and μ_{PDCCH} are the subcarrier spacing configurations for triggered SRS and PDCCH carrying the triggering command respectively in TS 38.214 [26].

The known condition for spatial relation associated to DL RS defined in clause 8.12.2 is applied.

8.12.5 RRC based spatial relation switch delay

If the target spatial relation associated to DL RS is known, UE shall be able to transmit target periodic SRS with spatial relation of the serving cell on which periodic SRS with spatial relation reconfigured in the slot $n + T_{\text{RRC_processing}} / \text{NR slot length} + 1$ when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command,
- $T_{\text{RRC_processing}}$ is the RRC processing delay defined in 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in TS38.331 [2].

If the target spatial relation associated to DL RS is unknown, UE shall be able to transmit target periodic SRS with spatial relation of the serving cell on which periodic SRS with spatial relation reconfigured in the slot $n + T_{\text{RRC_processing}} / \text{NR slot length} + T_{\text{L1-RSRP}} + 1$ when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command,
- $T_{\text{RRC_processing}}$ is the RRC processing delay defined in 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in TS38.331 [2].
- $T_{\text{L1-RSRP}}$ is defined in clause 8.12.3

8.12A Uplink spatial relation switch delay for RedCap

8.12A.1 Introduction

The requirements in this clause apply for a RedCap UE configured with one or more spatial relation configurations on serving cell in standalone NR. There is no requirement when the UE is requested to switch to a spatial relation with the higher layer parameter *spatialRelationInfo* associated to SRS. UE shall complete the switch of active spatial relation within the delay defined in this clause when the UE is requested to switch to a spatial relation with the higher layer parameter *spatialRelationInfo* associated to a DL RS.

8.12A.2 Known conditions for spatial relation when associated with DL-RS

The spatial relation associated to DL RS is known if the following conditions are met:

- During the period from the last transmission of the DL RS resource used for the L1-RSRP measurement reporting for the target spatial relation to the completion of active spatial relation, where the DL RS resource for L1-RSRP measurement is the DL RS in target spatial relation or QCLed to the target spatial relation with QCL type-D.
- Spatial relation switch command is received within 1280 ms upon the last transmission of the DL RS resource for beam reporting or measurement
- The UE has sent at least 1 L1-RSRP report for the target spatial relation before the spatial relation switch command
- The DL RS configured in spatial relation remains detectable during the spatial relation switching period
 - SNR of the DL RS configured in spatial relation $\geq -3\text{dB}$
- The SSB associated with the spatial relation remain detectable during the spatial relation switching period
 - SNR of the SSB associated with the spatial relation $\geq -3\text{dB}$

Otherwise, the spatial relation is unknown.

8.12A.3 MAC-CE based spatial relation switch delay

If the target spatial relation associated to DL RS is known and UE is configured with uplink resources for transmission on target spatial relation, upon receiving PDSCH carrying MAC-CE activation command in slot n , for UL spatial relation switch for PUCCH or semi-persistent SRS transmission of serving cell with a target UL spatial relation, the UE shall be able to transmit PUCCH or semi-persistent SRS with the target UL spatial relation no later than slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + 1$ when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1 where T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3].

If the target spatial relation associated to DL RS is unknown and UE is configured with uplink resources for transmission on target spatial relation, upon receiving PDSCH carrying MAC-CE activation command in slot n , for UL spatial relation switch for PUCCH or semi-persistent SRS transmission of serving cell with a target UL spatial relation, the UE shall be able to transmit PUCCH or semi-persistent SRS with the target UL spatial relation no later than slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + T_{\text{L1-RSRP}} + 1$ when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- T_{HARQ} is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3],
- $T_{\text{L1-RSRP}}$ is the time for Rx beam refinement in FR2, defined as
 - $T_{\text{L1-RSRP_Measurement_Period_SSB_RedCap}}$ for SSB as specified in clause 9.5B,
 - with the assumption of $M=1$
 - with $T_{\text{Report}} = 0$

- $T_{\text{L1-RSRP_Measurement_Period_CSI-RS_RedCap}}$ for CSI-RS as specified in clause 9.5.4.2
- configured with higher layer parameter *repetition* set to ON
- with the assumption of $M=1$ for periodic CSI-RS
- for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
- with $T_{\text{Report}} = 0$

The UE shall be able to transmit with the old UL spatial relation until slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe}, \mu}$.

For RedCap UE in HD-FDD mode, if a downlink reception overlaps with PUCCH or semi-persistent SRS transmission of the serving cell with the target UL spatial relation then the UE is allowed to postpone the uplink transmission.

When the UL spatial relation info switch for PUCCH changes both the associated DL RS and *pucch-PathlossReferenceRS* with the same MAC-CE activation, and if both the DL RS and *pucch-PathlossReferenceRS* are known as specified in clause 8.12A.2 and 8.14.2 respectively, the UE shall be able to transmit PUCCH with the target UL spatial relation after the delay specified in clause 8.14.3. If either the associated DL RS or *pucch-PathlossReferenceRS* are unknown, a longer switching delay is allowed. The UE is not required to transmit PUCCH with the target UL spatial relation until the DL RS and pathloss reference RS switch are completed.

8.12A.4 DCI based spatial relation switch delay

If the target spatial relation associated to DL RS is known and UE is configured with uplink resources for transmission on target spatial relation, when a UE receives the DCI triggering aperiodic SRS at slot n with the higher layer parameter *spatialRelationInfo*, UE shall be able to transmit aperiodic SRS with target spatial relation of the serving cell on which

spatial relation switch occurs no later than slot $\left\lfloor n \cdot \frac{2^{\mu_{\text{SRS}}}}{2^{\mu_{\text{PDCCH}}}} \right\rfloor + k + 1$, where, k is configured via higher layer parameter

slotOffset[2] for each triggered SRS resources set and is based on the subcarrier spacing of the triggered SRS transmission, μ_{SRS} and μ_{PDCCH} are the subcarrier spacing configurations for triggered SRS and PDCCH carrying the triggering command respectively in TS 38.214 [26].

For RedCap UE in HD-FDD mode, if a downlink reception overlaps with aperiodic SRS with target spatial relation of the serving cell then the UE is allowed to postpone the uplink transmission.

The known condition for spatial relation associated to DL RS defined in clause 8.12A.2 is applied.

8.12A.5 RRC based spatial relation switch delay

If the target spatial relation associated to DL RS is known and UE is configured with uplink resources for transmission on target spatial relation, UE shall be able to transmit target periodic SRS with spatial relation of the serving cell on which periodic SRS with spatial relation reconfigured no later than slot $n + T_{\text{RRC_processing}} / \text{NR slot length} + 1$ when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command,
- $T_{\text{RRC_processing}}$ is the RRC processing delay defined in 36.331 [16] if the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in TS38.331 [2].

If the target spatial relation associated to DL RS is unknown and UE is configured with uplink resources for transmission on target spatial relation, UE shall be able to transmit target periodic SRS with spatial relation of the serving cell on which periodic SRS with spatial relation reconfigured no later than slot $n + T_{\text{RRC_processing}} / \text{NR slot length} + T_{\text{L1-RSRP}} + 1$ when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1.

Where

- Slot n is the last slot overlapping with the PDSCH carrying RRC activation command,

- $T_{\text{RRC_processing}}$ is the RRC processing delay defined in 36.331 [16] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the RRC processing delay defined in TS38.331 [2].
- $T_{\text{L1-RSRP}}$ is defined in clause 8.12A.3

For RedCap UE in HD-FDD mode, if a downlink reception overlaps with target periodic SRS with spatial relation of the serving cell with periodic SRS with spatial relation reconfigured then the UE is allowed to postpone the uplink transmission.

8.12C Uplink spatial relation switch delay for satellite access

UL Spatial relation switch delay requirements do not apply for satellite access in FR1.

8.12C.1 Void

8.12C.2 Void

8.12C.3 Void

8.12C.4 Void

8.12C.5 Void

8.13 UE-specific CBW change

8.13.1 Introduction

The requirements in this clause apply for a UE receives reconfiguration of *offsetToCarrier* or *carrierBandwidth* to change channel bandwidth.

8.13.2 UE-specific CBW change delay

After the UE receives RRC reconfiguration involving *offsetToCarrier* or *carrierBandwidth* change on the old CBW, UE shall be able to receive PDSCH/PDCCH on the DL BWP with BWP ID *firstActiveDownlinkBWP-Id* or transmit PUSCH on the UL BWP with BWP ID *firstActiveUplinkBWP-Id* of the new CBW right after a time duration of $\frac{T_{\text{RRCprocessingDelay}} + T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}}$ slots which begins from the beginning of DL slot *n*, where

DL slot *n* is the last slot overlapping with the PDSCH containing the RRC command, and

$T_{\text{RRCprocessingDelay}}$ is the length of the RRC procedure delay in millisecond as defined in clause 11.2 in TS 36.331 [6] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in millisecond as defined in clause 12 in TS 38.331 [2], and

$T_{\text{CBWchangeDelayRRC}} = 6\text{ms}$ is the time used by the UE to perform CBW change.

The UE is not required to transmit UL signals or receive DL signals during the above defined time duration

$\frac{T_{\text{RRCprocessingDelay}} + T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}}$ on the cell where UE-specific CBW change occurs. When $T_{\text{HARQ}} >$

$T_{\text{RRCprocessingDelay}}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.13A UE-specific CBW change for RedCap

8.13A.1 Introduction

The requirements in this clause apply for a RedCap UE receives reconfiguration of *offsetToCarrier* or *carrierBandwidth* to change channel bandwidth.

8.13A.2 UE-specific CBW change delay

After the UE receives RRC reconfiguration involving *offsetToCarrier* or *carrierBandwidth* change on the old CBW, UE shall be able to receive PDSCH/PDCCH on an active DL BWP or transmit PUSCH on an active UL BWP of the new CBW right after a time duration of $\frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot overlapping with the PDSCH containing the RRC command, and

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in millisecond as defined in clause 11.2 in TS 36.331 [6] is the corresponding RRC message is embedded in E-UTRA RRC message, otherwise it is the length of the RRC procedure delay in millisecond as defined in clause 12 in TS 38.331 [2], and

$T_{CBWchangeDelayRRC} = 6ms$ is the time used by the UE to perform CBW change.

The UE is not required to transmit UL signals or receive DL signals during the above defined time duration $\frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ on the cell where UE-specific CBW change occurs. When $T_{HARQ} >$

$T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.13C UE-specific CBW change for satellite access

Editor's note: Applicability of frequency range, CA, DA, duplex mode, inter-RAT measurement, etc is subject to updates/changes based on the scope of the corresponding WID.

Editor's note: Terminology will be further clarified and selected between, e.g. NTN and satellite access, based on further agreements.

8.13C.1 Introduction

The requirements in this clause apply for a UE receives reconfiguration of *offsetToCarrier* or *carrierBandwidth* to change channel bandwidth.

8.13C.2 UE-specific CBW change delay

After the UE receives RRC reconfiguration involving *offsetToCarrier* or *carrierBandwidth* change on the old CBW, UE shall be able to receive PDSCH/PDCCH on an active DL BWP or transmit PUSCH on an active UL BWP of the new CBW right after a time duration of $\frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ slots which begins from the beginning of DL slot n, where

DL slot n is the last slot containing the RRC command, and

$T_{RRCprocessingDelay}$ is the length of the RRC procedure delay in millisecond as defined in clause 12 in TS 38.331 [2], and

$T_{CBWchangeDelayRRC} = 6ms$ is the time used by the UE to perform CBW change.

The UE is not required to transmit UL signals or receive DL signals during the above defined time duration $\frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ on the cell where UE-specific CBW change occurs. When $T_{HARQ} > T_{RRCprocessingDelay}$ a longer switching delay is allowed. Where T_{HARQ} is the time between DL data transmission and acknowledgement as specified in TS 38.213 [3].

8.14 Pathloss reference signal switching delay

8.14.1 Introduction

The requirements in this clause apply for pathloss reference signal activated or updated on serving cell in MR-DC or standalone NR in clause 7.1.1 in TS 38.213 [3].

UE shall complete the switch of pathloss reference signal within the delay defined in this clause.

8.14.2 Known conditions for pathloss reference signal

In FR2, the pathloss reference signal is known if the following conditions are met during the period between the last transmission of the RS resource used for L1-RSRP measurement reporting and the completion of pathloss reference signal switch, where the RS resource is the target pathloss reference signal or QCLeD (with Type D) to the target pathloss reference signal.

- Pathloss reference signal switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
- The UE has sent at least 1 L1-RSRP report for the target pathloss reference signal before the pathloss reference signal switch command
- The target pathloss reference signal remains detectable during the pathloss reference signal switching period
 - SNR of the target pathloss reference signal $\geq -3\text{dB}$
- The associated SSBs with the target pathloss reference signal remain detectable during the pathloss reference signal switching period
 - SNR of the associated SSB $\geq -3\text{dB}$

In FR1, the pathloss reference signal is known if the following conditions are met

- The target pathloss reference signal remains detectable during the pathloss reference signal switching period
 - SNR of the target pathloss reference signal $\geq -3\text{dB}$

Otherwise, the pathloss reference signal is unknown.

8.14.3 MAC-CE based pathloss reference signal switch delay

The requirements in this clause apply for a UE to update a pathloss reference signal by MAC-CE for PUCCH, PUSCH, semi-persistent SRS and aperiodic SRS.

If the target pathloss reference signal is known, upon receiving PDSCH carrying MAC-CE activation in slot n , UE shall be able to apply the target pathloss reference signal of the serving cell on which pathloss reference signal switch occurs no later than the slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu} + NM * \left\lceil \frac{5 * T_{target_PL-RS} + 2ms}{NR\ slot\ length} \right\rceil$. The UE shall be able to apply old pathloss reference signals until the slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu}$. Where

- T_{HARQ} is the timing between pathloss reference MAC-CE activation command and acknowledgement as specified in TS 38.321 [7].
- $NM = 1$, if the target PL-RS is not maintained by the UE, 0 otherwise.

In FR2, if the target pathloss reference signal is SSB, the requirements in this clause shall apply when the target pathloss reference signal is maintained by the UE.

- T_{target_PL-RS} is the periodicity of the target pathloss reference signal which would be SSB or NZP CSI-RS.
- PL-RS is maintained provided:
 - There are no more than 4 different RS activated as PL-RS per serving cell among all active spatial relations for PUSCH/PUCCH/SRS transmissions.
 - The target pathloss reference signal remains detectable during TCI state switching period
 - SNR of the target pathloss reference signal $\geq -3\text{dB}$
 - The associated SSBs with the target pathloss reference signal remain detectable during the TCI state switching period.
 - SNR of the associated SSB $\geq -3\text{dB}$

Note: longer application time is expected if measurement sample is not available due to measurement gap, DRX or other UE activities.

Note: longer application time is expected if the pathloss reference signal is unknown.

8.14C Pathloss reference signal switching delay for satellite access

Editor's note: Applicability of frequency range, CA, DA, duplex mode, inter-RAT measurement, etc is subject to updates/changes based on the scope of the corresponding WID.

Editor's note: Terminology will be further clarified and selected between, e.g. NTN and satellite access, based on further agreements.

8.14C.1 Introduction

The requirements in this clause apply for pathloss reference signal activated or updated on PCell in clause 7.1.1 in TS 38.213 [3] and the UE is configured with only PCell, which is served by satellite access node (SAN).

UE shall complete the switch of pathloss reference signal within the delay defined in this clause.

8.14C.2 Known conditions for pathloss reference signal

The pathloss reference signal is known if the following conditions are met during the period between the last transmission of the RS resource used for L1-RSRP measurement reporting and the completion of pathloss reference signal switch, where the RS resource is the target pathloss reference signal or QCLeD (with Type D) to the target pathloss reference signal.

- Pathloss reference signal switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
- The UE has sent at least 1 L1-RSRP report for the target pathloss reference signal before the pathloss reference signal switch command
- The target pathloss reference signal remains detectable during the pathloss reference signal switching period
 - SNR of the target pathloss reference signal $\geq -3\text{dB}$

- The associated SSBs with the target pathloss reference signal remain detectable during the pathloss reference signal switching period
- SNR of the associated SSB $\geq -3\text{dB}$

Otherwise, the pathloss reference signal is unknown.

8.14C.3 MAC-CE based pathloss reference signal switch delay

The requirements in this clause apply for a UE to update a pathloss reference signal by MAC-CE for PUCCH, PUSCH, semi-persistent SRS and aperiodic SRS.

If the target pathloss reference signal is known, upon receiving PDSCH carrying MAC-CE activation in slot n , UE shall be able to apply the target pathloss reference signal of the serving cell on which pathloss reference signal switch occurs no later than the slot $n + T_{HARQ} + 3N_{\text{slot}}^{\text{subframe},\mu} + NM * \left\lceil \frac{5 * T_{\text{target_PL-RS}} + 2\text{ms}}{NR \text{ slot length}} \right\rceil$. The UE shall be able to apply old pathloss reference signals until the slot $n + T_{HARQ} + 3N_{\text{slot}}^{\text{subframe},\mu}$. Where

- T_{HARQ} is the timing between pathloss reference MAC-CE activation command and acknowledgement as specified in TS 38.321 [7].
- $NM = 1$, if the target PL-RS is not maintained by the UE, 0 otherwise.
- $T_{\text{target_PL-RS}}$ is the periodicity of the target pathloss reference signal which would be SSB or NZP CSI-RS.

Note: longer application time is expected if measurement sample is not available due to measurement gap, DRX or other UE activities.

Note: longer application time is expected if the pathloss reference signal is unknown.

8.15 Active downlink TCI state switching delay for unified TCI

8.15.1 Introduction

The requirements in this clause apply for a UE configured with *dl-OrJointTCI-StateList* configurations for DL channels on a serving cell. Further the requirements also apply for all the list of serving cells in *simultaneousU-TCI-UpdateList1*, *simultaneousU-TCI-UpdateList2*, *simultaneousU-TCI-UpdateList3*, *simultaneousU-TCI-UpdateList4* in MR-DC or standalone NR provided all serving cells in the list are configured with the same serving cell and BWP in *unifiedTCI-StateRef-r17*. UE shall complete the switch of active downlink TCI state within the delay defined in this clause.

When the target DL TCI state refers to an additional PCI different from the serving cell PCI in which this DL TCI-State is configured, the requirements in this clause are applicable provided that following conditions are met:

- Active BWP of the serving cell and a cell with the additional PCI are the same
- Center frequency, SCS and SFN offset of a cell with the additional PCI are as the same as serving cell - The cell with the additional PCI is known to the UE.

A cell with the additional PCI is known if the following conditions are met:

- During the last 5s before L1-RSRP measurement is configured, the UE has sent a valid L3 measurement report for the cell with the additional PCI
- Timing offset between serving cell and the cell with the additional PCI is within CP of the corresponding SCS

Otherwise, the cell with the additional PCI is unknown.

8.15.2 Known conditions for downlink TCI state

The downlink TCI state is known if the following conditions are met:

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target downlink TCI state to the completion of active downlink TCI state switch, where the RS resource for L1-RSRP measurement is the RS in target downlink TCI state or QCLed to the target downlink TCI state
- Downlink TCI state switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
- The UE has sent at least 1 L1-RSRP report for the target downlink TCI state before the downlink TCI state switch command
- The target downlink TCI state remains detectable during the downlink TCI state switching period
- The SSB associated with the downlink TCI state remain detectable during the downlink TCI switching period
 - SNR of the downlink TCI state $\geq -3\text{dB}$
 - The SSB can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

Otherwise, the downlink TCI state is unknown.

8.15.3 MAC-CE based downlink TCI state switch delay

The requirements in this clause shall apply for DL TCI state switch using separate DL TCI state or joint TCI state of unified TCI state switch framework.

In case that source RS in DL TCI state or joint TCI state is associated with a PCI different from that of the serving cell, the requirements in this clause shall apply if the cell with different PCI satisfies the known cell condition defined in 8.15.1. If the known cell condition is not met, longer delay may be expected.

In case of joint TCI state switch, if the target PL-RS is not maintained, UE is not expected to receive on DL based on the target TCI state before UE completes the DL and UL TCI state switch.

If the target TCI state is known, upon receiving PDSCH carrying MAC-CE activation command in slot n , UE shall be able to receive UE-dedicated PDCCH/PDSCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + T_{\text{OK}} \cdot (T_{\text{first-SSB}} + T_{\text{SSB-proc}}) / \text{NR slot length}$. The UE shall be able to receive UE-dedicated PDCCH/PDSCH with the old TCI state until slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$ where T_{HARQ} (in slot) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3];

- $T_{\text{first-SSB}}$ is time to first SSB transmission after MAC CE command is decoded by the UE; The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state
- $T_{\text{SSB-proc}} = 2 \text{ ms}$;
- $T_{\text{OK}} = 1$ if target TCI state is not in the active TCI state list for PDSCH/PDCCH, 0 otherwise.

If the target TCI state is unknown, upon receiving PDSCH carrying MAC-CE activation command in slot n , UE shall be able to receive UE-dedicated PDCCH/PDSCH with target TCI state of the serving cell on which TCI state switch occurs at the first slot that is after slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{L1-RSRP}} + T_{\text{OK}} \cdot (T_{\text{first-SSB}} + T_{\text{SSB-proc}})) / \text{NR slot length}$. The UE shall be able to receive UE-dedicated PDCCH/PDSCH with the old TCI state until slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$.

Where

- $T_{\text{L1-RSRP}} = 0$ in FR1 or when the TCI state switching not involving QCL-TypeD in FR2. Otherwise,
- $T_{\text{L1-RSRP}}$ is the time for Rx beam refinement in FR2, defined as
- $T_{\text{L1-RSRP_Measurement_Period_SSB}}$ for SSB as specified in clause 9.5.4.1,
- with the assumption of $M=1$

- with $T_{\text{Report}} = 0$
- $T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$ for CSI-RS as specified in clause 9.5.4.2
- CSI-RS based L1-RSRP measurement only apply for TCI state switch when source RS is associated with serving cell
- configured with higher layer parameter *repetition* set to ON
- with the assumption of $M=1$ for periodic CSI-RS
- for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
- with $T_{\text{Report}} = 0$
- $TO_{\text{uk}} = 1$ for CSI-RS based L1-RSRP measurement, and 0 for SSB based L1-RSRP measurement when TCI state switching involves QCL-TypeD
- $TO_{\text{uk}} = 1$ when TCI state switching involves other QCL types only
- $T_{\text{first-SSB}}$ is time to first SSB transmission after L1-RSRP measurement when TCI state switching involves QCL-TypeD;
- $T_{\text{first-SSB}}$ is time to first SSB transmission after MAC CE command is decoded by the UE for other QCL types;
- The SSB shall be the QCL-TypeA or QCL-TypeC to target TCI state

8.15.4 DCI based downlink TCI state switch delay

When a UE is configured with the higher layer parameter with *dl-OrJointTCI-StateListor TCI-UL-State*, activated with TCI states for downlink transmission by MAC CE indication of more than one codepoints, and receives DCI format 1_1/1_2 with or without DL assignment providing indicated TCI-State or TCI state pair in the active TCI list for a CC, the UE transmits a PUCCH with HARQ-ACK information corresponding to the DCI carrying the TCI-State indication.

If the target TCI state is known, the downlink TCI switching to the indicated DL TCI state or joint TCI state in the DCI format shall be completed starting from the first slot that is at least *beamAppTime-r17* symbols after the last symbol of the PUCCH carrying HARQ-ACK in response to the DCI triggering TCI state activation. The first slot and the *beamAppTime-r17* symbols are both determined on the carrier with the smallest SCS among the carrier(s) applying the beam indication. The value of *beamAppTime-r17* is defined in TS 38.331 [2]. The known condition for TCI state defined in clause 8.15.2 is applied.

8.15.5 Active Downlink TCI state list update delay

The requirements specified in this clause are applicable if

- higher layer configuration '*unifiedTCI-StateType-r17*' is set to '*separate*', and a MAC CE activates more than one target separate TCIs, and at least one DL TCI is included, or
- higher layer configuration '*unifiedTCI-StateType-r17*' is set to '*joint*', and a MAC CE activates more than one target joint TCI.

If all the target TCI states in the active TCI state list are known, upon receiving PDSCH carrying MAC-CE active TCI state list update at slot n , UE shall have completed the TCI state list update in slot

$$n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + TO_k \cdot (T_{\text{first-SSB_List}} + T_{\text{SSB-proc}}) / NR \text{ slot length}.$$

If a subset of the target TCI states in the active TCI state list are unknown, upon receiving PDSCH carrying MAC-CE active TCI state list update at slot n , UE shall have completed the TCI state list update in slot

$$n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{L1-RSRP_list}} + TO_{\text{uk}} \cdot (T_{\text{first-SSB_List}} + T_{\text{SSB-proc}})) / NR \text{ slot length}.$$

If all target TCI states in the active TCI state list are unknown, the requirements specified in this clause are not applicable.

Where

- $T_{L1-RSRP_List}$ is the longest L1 measurement time ($T_{L1-RSRP}$) of the source RS among the unknown target TCI states, where $T_{L1-RSRP}$ is specified in clause 8.15.3
- If the number of cells associated with the target TCI states in the active TCI list is 2, and time to first SSBs associated to the TCIs are overlapped in FR2,
- $T_{first-SSB_List} = T_{first-SSB_SC} + \min(T_{SSB_SC}, T_{SSB_CDP})$.
- If the number of cells associated with the target TCI states in the active TCI list is 2, and time to first SSBs associated to the TCIs are not overlapped in FR1 or FR2,
- $T_{first-SSB_List} = \max(T_{first-SSB_SC}, T_{first-SSB_CDP})$
- Otherwise,
- $T_{first-SSB_List} = T_{first-SSB_SC}$.
- T_{SSB_SC} is the SSB periodicity of serving cell.
- T_{SSB_CDP} is the SSB periodicity of cell with different PCI from serving cell.
- $T_{first-SSB_SC}$ is the $T_{first-SSB}$ from serving cell
- $T_{first-SSB_CDP}$ is the $T_{first-SSB}$ from cell with different PCI from serving cell.
- T_{HARQ} , $T_{first-SSB}$, $T_{SSB-proc}$, TO_k , TO_{uk} are defined in clause 8.15.3. T_{SSB} is the SSB periodicity.

When UE receives PDSCH carrying MAC-CE for active TCI state list update, and

- higher layer configuration '*unifiedTCI-StateType-r17*' is set to '*joint*', or
- higher layer configuration '*unifiedTCI-StateType-r17*' is set to '*separate*', while the target TCI list comprises at least one DL TCIs and at least one UL TCIs,

UE is not expected to receive on DL based on the target TCI state before UE completes the DL and UL TCI state list update.

8.16 Active uplink TCI state switching delay for unified TCI

8.16.1 Introduction

The requirements in this clause apply for a UE configured with *dl-OrJointTCI-StateList* (if *unifiedTCI-StateType* is indicated as *Joint*) or *TCI-UL-State* configurations for UL channels/signals on a serving cell. Further the requirements also apply for all the list of serving cells in *simultaneousU-TCI-UpdateList1*, *simultaneousU-TCI-UpdateList2*, *simultaneousU-TCI-UpdateList3*, *simultaneousU-TCI-UpdateList4* in MR-DC or standalone NR provided all serving cells in the list are configured with the same serving cell and BWP in *unifiedTCI-StateRef-r17*. There is no requirement when the UE is requested to switch to a TCI state with the higher layer parameter *TCI-UL-State* associated to SRS. UE shall complete the switch of active uplink TCI state within the delay defined in this clause when the UE is requested to switch to a TCI state with the higher layer parameter *dl-OrJointTCI-StateList* or *TCI-UL-State* associated to a DL RS.

PL-RS may be associated with or included in UL TCI state or joint TCI state. The requirements in this clause shall apply if either of the following conditions are met:

- PL-RS is identical to source RS in UL TCI state or joint TCI state
- PL-RS and source RS in UL TCI state or joint TCI state are QCL-Type D

When the target UL TCI state refers to an additional PCI different from serving cell PCI in which this UL TCI state is configured, the requirements in this clause are applicable provided that the following conditions are met:

- Active BWP of the serving cell and a cell with the additional PCI are the same
- Center frequency, SCS and SFN offset of a cell with the additional PCI are as the same as serving cell
- The cell with the additional PCI is known to the UE.

A cell with the additional PCI is known if the following conditions are met:

- During the last 5s before L1-RSRP measurement is configured, the UE has sent a valid L3 measurement report for the cell with the additional PCI
- Timing offset between serving cell and the cell with the additional PCI is within CP of the corresponding SCS
- The SSB from the cell with the additional PCI remains detectable according to the cell identification requirements specified in clause 9.2

Otherwise, the cell with the additional PCI is unknown.

8.16.2 Known conditions for uplink TCI state

The uplink TCI state is known if the following conditions are met:

- During the period from the last transmission of the RS resource used for the L1-RSRP measurement reporting for the target uplink TCI state to the completion of active uplink TCI state switch, where the RS resource for L1-RSRP measurement is the RS in target uplink TCI state or QCLed to the target uplink TCI state
- Uplink TCI state switch command is received within 1280 ms upon the last transmission of the RS resource for beam reporting or measurement
- The UE has sent at least 1 L1-RSRP report for the target uplink TCI state before the uplink TCI state switch command
- The RS configured in target uplink TCI state remains detectable during the uplink TCI state switching period
 - SNR of the RS configured in target uplink TCI state $\geq -3\text{dB}$
- The target uplink TCI state remains detectable during the uplink TCI state switching period
- The SSB associated with the uplink TCI state remain detectable during the uplink TCI switching period
 - SNR of the uplink TCI state $\geq -3\text{dB}$
 - The SSB can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

Otherwise, the uplink TCI state is unknown.

8.16.3 MAC-CE based uplink TCI state switch delay

The requirements in this clause shall apply for UL TCI state switch using separate UL TCI state or joint TCI state of unified TCI state switch framework.

In case that source RS in UL TCI state or joint TCI state is associated with a PCI different from that of the serving cell, the requirements in this clause shall apply if the cell with different PCI satisfies the known cell condition defined in 8.16.1. If the known cell condition is not met, longer delay may be expected.

In case of joint TCI state switch, UE is not expected to transmit on UL based on the target TCI state before UE completes the DL and UL TCI state switch.

For separate UL TCI state switch or joint TCI state switch for PUCCH or PUSCH, or semi-persistent/aperiodic/periodic SRS, when *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1, upon receiving PDSCH carrying MAC-CE activation command in slot n on serving cell,

- If target TCI state is known,
- The UE shall be able to transmit uplink signal with the target TCI state in the slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + \text{NM} * (T_{\text{first_target_PL-RS}} + 4 * T_{\text{target_PL-RS}} + 2\text{ms}) / \text{NR slot length}$.
- If target TCI state is unknown,
- The UE shall be able to transmit uplink signal with the target TCI state in the slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{L1-RSRP}} + T_{\text{first_target_PL-RS}} + 4 * T_{\text{target_PL-RS}} + 2\text{ms}) / \text{NR slot length}$.
- The UE shall be able to transmit with the old UL TCI state until slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$.

Where,

- T_{HARQ} (in slot) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3].
- $\text{NM} = 1$, if the target PL-RS is not maintained by the UE, 0 otherwise.

In FR2, in case that the target PL-RS associated with or included in the target UL or joint TCI state is SSB, the requirements in this clause shall apply when this target PL-RS is maintained by the UE.

- PL-RS is maintained provided:
 - the target PL-RS is associated with or included in the UL or joint TCI states in the active TCI list for PUSCH/PUCCH/SRS transmissions
 - There are no more than 4 different RS activated as PL-RS per serving cell among all active UL TCI states (UL or joint TCI state) for PUSCH/PUCCH/SRS transmissions
 - The target pathloss reference signal remains detectable during TCI state switching period
 - SNR of the target pathloss reference signal $\geq -3\text{dB}$
 - The associated SSBs with the target pathloss reference signal remain detectable during the TCI state switching period.
 - SNR of the associated SSB $\geq -3\text{dB}$
- $T_{\text{first_target_PL-RS}}$ is time to first pathloss RS transmission after L1-RSRP measurement when target TCI state is unknown.
- $T_{\text{first_target_PL-RS}}$ is time to first pathloss RS transmission after MAC CE command is decoded by the UE for known TCI State.
- $T_{\text{target_PL-RS}}$ is the periodicity of the target pathloss reference signal which would be SSB or NZP CSI-RS when PL-RS is associated with serving cell
- $T_{\text{target_PL-RS}}$ is the periodicity of the target pathloss reference signal which would be SSB when PL-RS is associated with PCI different from serving cell
- $T_{\text{L1-RSRP}}$ is the time for Rx beam refinement in FR2, defined as
 - $T_{\text{L1-RSRP_Measurement_Period_SSB}}$ for SSB as specified in clause 9.5.4.1 or 9.13.4.1,
 - with the assumption of $M=1$
 - with $T_{\text{Report}} = 0$
 - $T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$ for CSI-RS as specified in clause 9.5.4.2
 - CSI-RS based L1-RSRP measurement only apply for TCI state switch when source RS is associated with serving cell

- configured with higher layer parameter *repetition* set to ON
- with the assumption of $M=1$ for periodic CSI-RS
- for aperiodic CSI-RS if number of resources in resource set at least equal to *MaxNumberRxBeam*
- with $T_{\text{Report}} = 0$

The requirements specified in this clause are applicable if no more than 4 different RSs are activated as PL-RS per serving cell among all active UL (or joint) TCI states.

8.16.4 DCI based uplink TCI state switch delay

When a UE is configured with the higher layer parameter with *dl-OrJointTCI-StateList* or *TCI-UL-State*, activated with TCI states for uplink transmission by MAC CE indication of more than one codepoints, and receives DCI format 1_1/1_2 with or without DL assignment providing indicated TCI-State or TCI state pair in the active TCI list for a CC, the UE transmits a PUCCH with HARQ-ACK information corresponding to the DCI carrying the TCI-State indication.

The requirements in this clause are applicable only if the DCI format indicating UL TCI state or joint TCI state switch is received by UE when

- target TCI state is known, and
- target TCI state is in active TCI state list, and
- target PL-RS is maintained as defined in clause 8.16.3

If the target TCI state is known, the uplink TCI switching to the indicated UL TCI state or joint TCI state in the DCI format shall be completed starting from the first slot that is at least *beamAppTime-r17* symbols after the last symbol of the PUCCH carrying HARQ-ACK in response to the DCI triggering TCI state activation. The first slot and the *beamAppTime-r17* symbols are both determined on the carrier with the smallest SCS among the carrier(s) applying the beam indication. The value of *beamAppTime-r17* is defined in TS 38.331 [2]. The known condition for TCI state defined in clause 8.16.2 is applied.

If a PL-RS is associated with or included in UL TCI state or joint TCI state, the UL TCI switching and PL-RS switching shall be completed at the same time.

8.16.5 Active Uplink TCI state list update delay

The requirements specified in this clause are applicable if

- higher layer configuration '*unifiedTCI-StateType-r17*' is set to '*separate*', and a MAC CE activates more than one target separate TCIs, and at least one UL TCI is included, or
- higher layer configuration '*unifiedTCI-StateType-r17*' is set to '*joint*', and a MAC CE activates more than one target joint TCI.

If all the target TCI states in the active TCI state list are known, upon receiving PDSCH carrying MAC-CE active TCI state list update at slot n , UE shall have completed the TCI state list update in slot

$$n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + NM * (T_{\text{first_target-PL-RS_List}} + 4 * T_{\text{target_PL-RS_List}} + 2\text{ms}) / NR \text{ slot length},$$

If a subset of target TCI states in the active TCI state list are unknown, upon receiving PDSCH carrying MAC-CE active TCI state list update at slot n , UE shall have completed the TCI state list update in slot

$$n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{L1-RSRP_List}} + T_{\text{first_target-PL-RS_List}} + 4 * T_{\text{target_PL-RS_List}} + 2\text{ms}) / NR \text{ slot length}$$

If all target TCI states in the active TCI state list are unknown, the requirements specified in this clause are not applicable.

Where

- If all TCIs are known,
- if the target PL-RS associated with or included in any UL TCI is not maintained, $NM = 1$; Where maintained PL-RS is defined in clause 8.16.3
- if a subset of target TCI states in the active TCI state list are unknown,
- $T_{L1-RSRP_List}$ is the longest L1 measurement time ($T_{L1-RSRP}$) of the source RS among the unknown target TCI states, where $T_{L1-RSRP}$ is specified in clause 8.16.3
- if the number of cells associated with the target TCI states in the active TCI list is 2, and time to first PL-RS associated to the TCIs are overlapped in FR2,
- $T_{first_target-PL-RS_List} = T_{first_target-PL-RS_SC} + \min(T_{target-PL-RS_SC}, T_{target-PL-RS_CDP})$;
- $T_{target-PL-RS_List} = 2 * T_{target-PL-RS_SC}$, if $T_{target-PL-RS_SC} = T_{target-PL-RS_CDP}$
- $T_{target-PL-RS_List} = \max(T_{target-PL-RS_SC}, T_{target-PL-RS_CDP})$, if $T_{target-PL-RS_SC} \neq T_{target-PL-RS_CDP}$
- if the number of cells associated with the target TCI states in the active TCI list is 2, and time to first PL-RS associated to the TCIs are not overlapped in FR2,
 - $T_{first_target-PL-RS_List} = \max(T_{first_target-PL-RS_SC}, T_{first_target-PL-RS_CDP})$;
 - $T_{target-PL-RS_List} = \max(T_{target-PL-RS_SC}, T_{target-PL-RS_CDP})$
- Otherwise,
 - $T_{first_target-PL-RS_List} = T_{first_target-PL-RS_SC}$
 - $T_{target-PL-RS_List} = T_{target-PL-RS_SC}$.
 - $T_{first_target-PL-RS_SC}$ is $T_{first_target-PL-RS}$ for serving cell
 - $T_{first_target-PL-RS_CDP}$ is $T_{first_target-PL-RS}$ for cell with different PCI from serving cell
 - $T_{target-PL-RS_SC}$ is $T_{target-PL-RS}$ for serving cell
 - $T_{target-PL-RS_CDP}$ is $T_{target-PL-RS}$ for cell with different PCI from serving cell- T_{HARQ} , $T_{first_target-PL-RS}$, $T_{target-PL-RS}$ are defined in clause 8.16.3.

The requirements specified in this clause do not apply if more than 4 different RSs are activated as PL-RS per serving cell among all active UL (or joint) TCI states.

When UE receives PDSCH carrying MAC-CE for active TCI state list update, and

- higher layer configuration '*unifiedTCI-StateType-r17*' is set to '*joint*', or
- higher layer configuration '*unifiedTCI-StateType-r17*' is set to '*separate*', while the target TCI list comprises at least one DL TCIs and at least one UL TCIs,

UE is not expected to transmit on UL based on the target TCI before UE completes the DL and UL TCI list update.

The requirements in this clause are applicable when the source RS of the active UL TCI state is a DL-RS and this DL-RS is included as one of the source RSs in the DL active TCI list.

8.17 SCG Activation and Deactivation Delay

8.17.1 Introduction

This clause defines requirements for the delay within which the UE shall be able to activate one SCG and deactivate on SCG.

The requirements shall apply for NR-DC with an NR PCell, PSCell or SCell.

8.17.2 SCG Activation Delay Requirement

The requirements in this clause shall apply for the UE configured with one deactivated SCG in NR-DC and when PSCell in one SCG is being activated.

The delay within which the UE shall be able to activate the deactivated SCG depends upon the specified conditions.

Upon receiving SCG activation command in slot n , the UE shall be capable to transmit PRACH preamble or PUCCH or PUSCH towards PSCell no later than in slot $n + \frac{T_{\text{activation_time}}}{\text{NR slot length}}$,

where:

$$T_{\text{activation_time}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search}} + T_{\Delta} + T_{\text{IU}} + 2 \text{ ms}$$

$T_{\text{RRC_delay}}$ is the RRC procedure delay as specified in TS 38.331 [2].

$T_{\text{processing}}$ is the SW processing time needed by UE, including RF warm up period. When PSCell is activated from deactivated state, if any PSCell parameter is modified, $T_{\text{processing}} = 20\text{ms}$. Otherwise, $T_{\text{processing}} = 5 \text{ ms}$.

T_{search} is the time for AGC settling and PSS/SSS detection.

For RACH based PSCell activation, if the FR2 PSCell is known, $T_{\text{search}} = 0 \text{ ms}$. If the FR2 PSCell is unknown and $E_s/I_{\text{ot}} \geq -2 \text{ dB}$, then $T_{\text{search}} = 24 * T_{\text{rs}} \text{ ms}$.

For RACH-less based PSCell activation, if *bfd-and-RLM* is configured and TCI state is known, $T_{\text{search}} = 0 \text{ ms}$. There are no requirements if TCI state is unknown.

T_{Δ} is time for fine time tracking and acquiring full timing information of the target PSCell. $T_{\Delta} = 1 * T_{\text{rs}} \text{ ms}$.

T_{IU} : When RACH based PSCell activation is configured, it is the delay uncertainty in acquiring the first available PRACH occasion in the PSCell. T_{IU} is up to the summation of SSB to PRACH occasion association period and 10 ms. SSB to PRACH occasion associated period is defined in Table 8.1-1 of TS 38.213 [3].

When RACH-less based PSCell activation is configured, it is the uncertainty in acquiring the first PUSCH transmission occasion [or SR on PUCCH].

T_{rs} is the SMTC periodicity of the PSCell if the UE has been provided with an SMTC configuration for the target cell in SCG activation command, otherwise T_{rs} is the SMTC configured in the measObjectNR having the same SSB frequency and subcarrier spacing. If the UE is not provided SMTC configuration or measurement object on this frequency, the requirement in this clause is applied with $T_{\text{rs}} = 5 \text{ ms}$ assuming the SSB transmission periodicity is 5 ms. There is no requirement if the SSB transmission periodicity is not 5.

In FR2, the PSCell is known if it has been meeting the following conditions:

- During the last 5 seconds before the reception of the SCG activation command:
- the UE has sent a valid measurement report for the PSCell being activated and
- One of the SSBs measured from the PSCell being activated remains detectable according to the cell identification conditions specified in clause 9.3.
- One of the SSBs measured from PSCell being activated also remains detectable during the PSCell activation delay $T_{\text{activation_time}}$ according to the cell identification conditions specified in clause 9.3.

otherwise it is unknown.

If the UE is configured to perform *bfd-and-RLM* while the SCG is deactivated

- The TCI state is known if all the following conditions are met:
 - During the period from the reception of the RRC command to deactivate the PCell to the first transmission towards PCell on PUCCH or PUSCH:
 - UE has not detected beam failure
 - The side condition $\hat{E}_s/I_{ot} \geq -3\text{dB}$ is fulfilled for the RSs configured for *bfd-and-RLM* for the PCell being activated
 - The SSB measured remains detectable according to the cell identification conditions specified in clause 9.2.
- Otherwise, the TCI state is unknown.

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.17.3 SCG Deactivation Delay Requirement

The requirements in this clause shall apply for a UE which is configured with at least PCell and PSCell.

Upon receiving RRC-based SCG deactivation command in subframe n , the UE shall accomplish the deactivation actions specified in TS 38.331 [2] no later than in slot $n + \frac{T_{RRC_delay}}{NR\ slot\ length}$:

where

T_{RRC_delay} is the RRC procedure delay as specified in TS 38.331 [2].

The PCell interruption specified in clause 8.2 is allowed only during the RRC reconfiguration procedure [2].

8.18 TRP specific Link Recovery Procedures

8.18.1 Introduction

The UE shall assess the downlink radio link quality of a serving cell based on the reference signal provided in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ as specified in TS 38.213 [3] in order to detect beam failure on:

- PCell in SA, NR-DC, or NE-DC operation mode,
- PSCell in NR-DC and EN-DC operation mode,
- SCell in SA, NR-DC, NE-DC or EN-DC operation mode.

The RS resource configurations in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ on PCell or PSCell can be periodic CSI-RS resources and/or SSBs. RS resource configuration in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ on SCell shall be periodic CSI-RS. UE is not required to perform beam failure detection outside the active DL BWP. UE is not required to meet the requirements in clause 8.18.2 and 8.18.3 if UE does not have configured sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$. UE is not required to perform beam failure detection on a deactivated SCell, and also not required to perform beam failure detection on resources which is implicitly configured for a deactivated SCell. UE is not required to perform beam failure detection on a SCell on which $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ is not configured.

If *additionalPCIList* is configured for the serving cell, the SSBs in sets $\bar{q}_{0,1}$ and $\bar{q}_{1,1}$ can be associated to the same additional PCI other than serving cell PCI.

On each RS resource configuration in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$, the UE shall estimate the radio link quality and compare it to the threshold Q_{out_LR} for the purpose of accessing downlink radio link quality of the serving cell.

The threshold $Q_{\text{out_LR}}$ is defined as the level at which the downlink radio level link of a given resource configuration on two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ cannot be reliably received and shall correspond to the $\text{BLER}_{\text{out}} = 10\%$ block error rate of a hypothetical PDCCH transmission. For SSB based beam failure detection, $Q_{\text{out_LR_SSB}}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.518.2.1-1. For CSI-RS based beam failure detection, $Q_{\text{out_LR_CSI-RS}}$ is derived based on the hypothetical PDCCH transmission parameters listed in Table 8.181.3.1-1.

Upon request the UE shall deliver configuration indexes from the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ as specified in TS 38.213 [3], to higher layers, and the corresponding L1-RSRP measurement provided that the measured L1-RSRP is equal to or better than the threshold $Q_{\text{in_LR}}$, which is indicated by higher layer parameter *rsrp-ThresholdSSB*. The UE applies the $Q_{\text{in_LR}}$ threshold to the L1-RSRP measurement obtained from an SSB. The UE applies the $Q_{\text{in_LR}}$ threshold to the L1-RSRP measurement obtained for a CSI-RS resource after scaling a respective CSI-RS reception power with a value provided by higher layer parameter *powerControlOffsetSS*. The RS resource configurations in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ can be periodic CSI-RS resources or SSBs or both SSB and CSI-RS resources. UE is not required to perform candidate beam detection outside the active DL BWP. UE is not required to perform candidate beam detection on a SCell on which $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ is not configured.

8.18.2 Requirements for TRP specific SSB based beam failure detection

8.18.2.1 Introduction

The requirements in this clause apply for each SSB resource in the set two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ configured for a serving cell, provided that the SSB configured for beam failure detection is actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.18.2.2. The SSB(s) in set $\bar{q}_{0,1}$ can be associated with an additional PCI other than serving cell PCI.

Table 8.18.2.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average SSS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	0dB
Bandwidth (PRBs)	24
Sub-carrier spacing (kHz)	Same as the SCS of RMSI CORESET
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.18.2.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the configured SSB resource in two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ estimated over the last $T_{\text{Evaluate_BFD_SSB}}$ ms period becomes worse than the threshold $Q_{\text{out_LR_SSB}}$ within $T_{\text{Evaluate_BFD_SSB}}$ ms period.

The value of $T_{\text{Evaluate_BFD_SSB}}$ is defined in Table 8.18.2.2-1 for FR1.

The value of $T_{\text{Evaluate_BFD_SSB}}$ is defined in Table 8.18.2.2-2 for FR2 with scaling factor $N=8$

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB.

- $P=1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1 - \frac{T_{SSB}}{T_{SMTCperiod}}}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).
- $P = P_{\text{sharing factor}}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC period ($T_{SSB} = T_{SMTCperiod}$).
- $P = \frac{1}{1 - \frac{T_{SSB}}{MGRP} - \frac{T_{SSB}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{SMTCperiod} \neq MGRP$ or
 - $T_{SMTCperiod} = MGRP$ and $T_{SSB} < 0.5 * T_{SMTCperiod}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{SSB}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and $T_{SMTCperiod} = MGRP$ and $T_{SSB} = 0.5 * T_{SMTCperiod}$
- $P = \frac{1}{1 - \frac{T_{SSB}}{T_{SMTCperiod}}}$, when the BFD-RS resource is partially overlapped with measurement gap ($T_{SSB} < MGRP$) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{SSB}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{SSB} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with measurement gap ($T_{SMTCperiod} < MGRP$)
- $P_{\text{sharing factor}} = 1$, if the BFD-RS resource outside measurement gap is
 - not overlapped with the SSB symbols indicated by SSB-ToMeasure and 1 data symbol before each consecutive SSB symbols indicated by SSB-ToMeasure and 1 data symbol after each consecutive SSB symbols indicated by SSB-ToMeasure, given that SSB-ToMeasure is configured, where the SSB-ToMeasure is the union set of SSB-ToMeasure from all the configured measurement objects merged on the same serving carrier, and;
 - not overlapped with the RSSI symbols indicated by ss-RSSI-Measurement and 1 data symbol before each RSSI symbol indicated by ss-RSSI-Measurement and 1 data symbol after each RSSI symbol indicated by ss-RSSI-Measurement, given that ss-RSSI-Measurement is configured.
 - $P_{\text{sharing factor}} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*. $T_{SMTCperiod}$ is the shortest SMTC period among all CCs in the same FR2 band, given the SMTC offset of all CCs in FR2 provided the same offset.

Longer evaluation period would be expected if the combination of BFD-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

The values of P_{TRP} defined in table 8.18.2.2-2 is defined as 2, if SSB/CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ are overlapped, else it is 1.

Table 8.18.2.2-1: Evaluation period $T_{Evaluate_BFD_SSB}$ for FR1

Configuration	$T_{Evaluate_BFD_SSB}$ (ms)
no DRX	$\text{Max}(50, \text{Ceil}(5 \times P) \times T_{SSB})$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(50, \text{Ceil}(7.5 \times P) \times \text{Max}(T_{DRX}, T_{SSB}))$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times P) \times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$. T_{DRX} is the DRX cycle length.	

Table 8.18.2.2-2: Evaluation period $T_{Evaluate_BFD_SSB}$ for FR2

Configuration	$T_{Evaluate_BFD_SSB}$ (ms)
no DRX	$\text{Max}(50, \text{Ceil}(5 \times P \times N^*P_{TRP}) \times T_{SSB})$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(50, \text{Ceil}(7.5 \times P \times N^*P_{TRP}) \times \text{Max}(T_{DRX}, T_{SSB}))$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times P \times N^*P_{TRP}) \times T_{DRX}$
Note: T_{SSB} is the periodicity of SSB in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$. T_{DRX} is the DRX cycle length.	

8.18.2.3 Measurement restriction for SSB based beam failure detection

The UE is required to be capable of measuring SSB for BFD without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following scenarios.

For FR1, when the SSB for BFD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for BFD measurement without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for BFD measurement without any restriction.
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined.

For FR2, when the SSB for BFD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for BFD measurement and CSI-RS. Longer measurement period for SSB based BFD measurement is expected, and no requirements are defined. When the SSB and CSI-RS for BFD measurements are from different sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$, UE shall be able to perform measure both SSB and CSI-RS for BFD measurements.

For FR2, when the SSB for BFD measurement on one CC is in the same or adjacent OFDM symbol as SSB with a different PCI for RLM, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSBs with the two different PCIs. Longer measurement period for SSB based BFD is expected, and no requirements are defined.

For FR2, if the network configures same or mixed numerology between SSB for BFD measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, UE shall be able to perform the related SSB based measurements in one band without any measurement restrictions on the other band, provided that UE is capable of independent beam management on this FR2 band pair.

8.18.3 Requirements for CSI-RS based beam failure detection

8.18.3.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ of resource configurations for a serving cell, provided that the CSI-RS resource(s) in two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ for beam failure detection are actually transmitted within the UE active DL BWP during the entire evaluation period specified in clause 8.18.3.2. UE is not expected to perform beam failure detection measurements on the CSI-RS configured for BFD if the CSI-RS is not QCL-ed, with QCL-TypeD when applicable, with the RS in the active TCI state of any CORESET configured in the UE active BWP.

Table 8.18.3.1-1: PDCCH transmission parameters for beam failure instance

Attribute	Value for BLER
DCI format	1-0
Number of control OFDM symbols	2
Aggregation level (CCE)	8
Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	0dB
Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	0dB
Bandwidth (PRBs)	48
Sub-carrier spacing (kHz)	SCS of the active DL BWP
DMRS precoder granularity	REG bundle size
REG bundle size	6
CP length	Normal
Mapping from REG to CCE	Distributed

8.18.3.2 Minimum requirement

UE shall be able to evaluate whether the downlink radio link quality on the CSI-RS resource in two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ estimated over the last $T_{\text{Evaluate_BFD_CSI-RS}}$ ms period becomes worse than the threshold $Q_{\text{out_LR_CSI-RS}}$ within $T_{\text{Evaluate_BFD_CSI-RS}}$ ms period.

The value of $T_{\text{Evaluate_BFD_CSI-RS}}$ is defined in Table 8.18.3.2-1 for FR1.

The value of $T_{\text{Evaluate_BFD_CSI-RS}}$ is defined in Table 8.18.3.2-2 for FR2 with $N=1$. The requirements of $T_{\text{Evaluate_BFD_CSI-RS}}$ apply provided that the CSI-RS for BFD is not in a resource set configured with repetition ON. The requirements shall not apply when the CSI-RS resource in the active TCI state of CORESET is the same CSI-RS resource for BFD and the TCI state information of the CSI-RS resource is not given, wherein the TCI state information means QCL Type-D to SSB for L1-RSRP or CSI-RS with repetition ON.

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS.
- $P = 1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR2,

- $P = 1$, when the BFD-RS resource is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is not overlapped with SMTC occasion ($T_{\text{CSI-RS}} < MGRP$)

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$).
- $P = P_{\text{sharing factor}}$, when the BFD-RS resource is not overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP} - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{\text{SMTCperiod}} \neq MGRP$ or
 - $T_{\text{SMTCperiod}} = MGRP$ and $T_{\text{CSI-RS}} < 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = MGRP$ and $T_{\text{CSI-RS}} = 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when the BFD-RS resource is partially overlapped with measurement gap ($T_{\text{CSI-RS}} < MGRP$) and the BFD-RS resource is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap.
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when the BFD-RS resource is partially overlapped with measurement gap and the BFD-RS resource is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < MGRP$)
- $P_{\text{sharing factor}} = 1$, if the BFD-RS resource outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;
 - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured,
- $P_{\text{sharing factor}} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc1*. $T_{\text{SMTCperiod}}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Note: The overlap between CSI-RS for BFD and SMTC means that CSI-RS for BFD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the BFD-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer BFD evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

The values of M_{BFD} used in Table 8.18.3.2-1 and Table 8.18.3.2-2 are defined as

- $M_{\text{BFD}} = 10$, if the CSI-RS resource(s) in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ used for BFD is transmitted with Density = 3 and over the bandwidth ≥ 24 PRBs.

The values of P_{BFD} used in Table 8.18.3.2-1 and Table 8.18.3.2-2 are defined as

For each CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- $P_{\text{BFD}} = 1$.

For each CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ configured for PSCell in NR-DC

$P_{\text{BFD}} = 2$ if UE is configured for beam failure detection on SCell, 1 otherwise.

For each CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ configured for a SCell

- $P_{\text{BFD}} = Z$ in EN-DC or NE-DC or SA.
- $P_{\text{BFD}} = 2 * Z$ in NR-DC.

Where Z is the number of band(s) on which UE is performing beam failure detection only for SCell.

The values of P_{TRP} define in table 8.518.3.2-2 is defined as 2, if SSB/CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ are overlapped, else it is 1.

Table 8.18.2-1: Evaluation period $T_{\text{Evaluate_BFD_CSI-RS}}$ for FR1

Configuration	$T_{\text{Evaluate_BFD_CSI-RS}}$ (ms)
no DRX	$\text{Max}(50, \text{Ceil}(M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times T_{\text{CSI-RS}})$
DRX cycle ≤ 320 ms	$\text{Max}(50, \text{Ceil}(1.5 \times M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
DRX cycle > 320 ms	$\text{Ceil}(M_{\text{BFD}} \times P \times P_{\text{BFD}}) \times T_{\text{DRX}}$
Note: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$. T_{DRX} is the DRX cycle length.	

Table 8.18.3.2-2: Evaluation period $T_{\text{Evaluate_BFD_CSI-RS}}$ for FR2

Configuration	$T_{\text{Evaluate_BFD_CSI-RS}}$ (ms)
no DRX	$\text{Max}(50, \text{Ceil}(M_{\text{BFD}} \times P \times N \times P_{\text{BFD}} * P_{\text{TRP}}) \times T_{\text{CSI-RS}})$
DRX cycle ≤ 320 ms	$\text{Max}(50, \text{Ceil}(1.5 \times M_{\text{BFD}} \times P \times N \times P_{\text{BFD}} * P_{\text{TRP}}) \times \text{Max}(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
DRX cycle > 320 ms	$\text{Ceil}(M_{\text{BFD}} \times P \times N \times P_{\text{BFD}} * P_{\text{TRP}}) \times T_{\text{DRX}}$
Note: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the two sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$. T_{DRX} is the DRX cycle length.	

8.18.3.3 Measurement restrictions for CSI-RS beam failure detection

The SSB mentioned in this clause can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

The UE is required to be capable of measuring CSI-RS for BFD without measurement gaps. The UE is required to perform the CSI-RS measurements with measurement restrictions as described in the following scenarios.

For both FR1 and FR2, when the CSI-RS for BFD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for BFD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for BFD measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for BFD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

For FR2, when the CSI-RS for BFD measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD or L1-RSRP measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for BFD measurement and SSB. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for BFD measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for BFD measurement and the other CSI-RS. Longer measurement period for CSI-RS based BFD measurement is expected, and no requirements are defined.
 - The CSI-RS for BFD measurement or the other CSI-RS in a resource set configured with repetition ON, or
 - The other CSI-RS is configured in two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ and beam failure is detected, or
 - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS for BFD measurement without any restriction.

When two CSI-RSs for BFD measurements are from different sets $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$, UE shall be able to perform measure both CSI-RSs for BFD measurements.

8.18.4 Minimum requirement for L1 indication

When more than one TRP is configured with different resource set for each TRP, requirements specified in 8.5.4 shall apply for each TRP.

8.18.5 Requirements for SSB based candidate beam detection

8.18.5.1 Introduction

The requirements in this clause apply for each SSB resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for a serving cell, provided that the SSBs configured for candidate beam detection (CBD) are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.18.5.2. The SSB(s) in set $\bar{q}_{1,1}$ can be associated with an additional PCI other than serving PCI.

8.18.5.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured SSB resource in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$, estimated over the last $T_{\text{Evaluate_CBD_SSB}}$ ms period becomes better than the threshold $Q_{\text{in_LR}}$ provided SSB_{RP} and SSB_{Es/Iot} are according to Annex Table B.2.4.1 for a corresponding band.

The UE shall monitor the configured SSB resources using the evaluation period in table 8.18.5.2-1 and 8.18.5.2-2 corresponding to the non-DRX mode, if the configured DRX cycle ≤ 320 ms.

The value of $T_{\text{Evaluate_CBD_SSB}}$ is defined in Table 8.18.5.2-1 for FR1.

The value of $T_{\text{Evaluate_CBD_SSB}}$ is defined in Table 8.18.5.2-2 for FR2 with scaling factor $N=8$.

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB,
- $P = 1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$).
- P is $P_{\text{sharing factor}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC period ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}} - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{\text{SMTCperiod}} \neq \text{MGRP}$ or
 - $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{SSB}} < 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{SSB}} = 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\text{Min}(\text{MGRP}, T_{\text{SMTCperiod}})}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < \text{MGRP}$)
- $P_{\text{sharing factor}} = 1$, if the candidate beam detection RS outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;
 - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured
- $P_{\text{sharing factor}} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smtc2* is present, $T_{\text{SMTCperiod}}$ follows *smtc2*; Otherwise $T_{\text{SMTCperiod}}$ follows *smtc1*. $T_{\text{SMTCperiod}}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

The values of P_{CBD} used in Table 8.18.5.2-1 and Table 8.18.5.2-2 are defined as

For each SSB resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- $P_{\text{CBD}} = 1$.

For each SSB resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for PSCell in NR-DC

- $P_{\text{CBD}} = 2$ if UE is configured for candidate beam detection on SCell, 1 otherwise.

For each SSB resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for a SCell

- $P_{\text{CBD}} = Z$ in EN-DC or NE-DC or SA.
- $P_{\text{CBD}} = 2 * Z$ in NR-DC.

Where Z is the number of band(s) on which UE is performing candidate beam detection only for SCell

- P_{CBD} is the number of band(s) on which UE is performing candidate beam detection only for SCell.

The values of P_{TRP} defined in table 8.18.5.2-2 is defined as 2, if SSB/CSI-RS resource in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ are overlapped, else it is 1.

Table 8.18.5.2-1: Evaluation period $T_{\text{Evaluate_CBD_SSB}}$ for FR1

Configuration	$T_{\text{Evaluate_CBD_SSB}}$ (ms)
non-DRX, DRX cycle $\leq 320\text{ms}$	$\text{Max}(25, \text{Ceil}(3 \times P \times P_{\text{CBD}}) \times T_{\text{SSB}})$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(3 \times P \times P_{\text{CBD}}) \times T_{\text{DRX}}$
Note: T_{SSB} is the periodicity of SSB in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$. T_{DRX} is the DRX cycle length.	

Table 8.18.5.2-2: Evaluation period $T_{\text{Evaluate_CBD_SSB}}$ for FR2

Configuration	$T_{\text{Evaluate_CBD_SSB}}$ (ms)
non-DRX, DRX cycle $\leq 320\text{ms}$	$\text{Max}(25, \text{Ceil}(3 \times P \times N \times P_{\text{CBD}} \times P_{\text{TRP}}) \times T_{\text{SSB}})$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(3 \times P \times N \times P_{\text{CBD}} \times P_{\text{TRP}}) \times T_{\text{DRX}}$
Note: T_{SSB} is the periodicity of SSB in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$. T_{DRX} is the DRX cycle length.	

8.18.5.3 Measurement restriction for SSB based candidate beam detection

For FR1, when the SSB for CBD measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for CBD measurement without any restrictions.
- If SSB and CSI-RS have different SCS-es,
- If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for CBD measurement without any restriction.

- If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

For FR2, when the SSB for CBD measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for CBD measurement and CSI-RS. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined. When the SSB and CSI-RS for CBD measurements are from different sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$, UE shall be able to measure both SSB and CSI-RS for CBD measurements.

For FR2, when the SSB for CBD measurement on one CC is in the same OFDM symbol as SSB with a different PCI for RLM, BFD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSBs with the two different PCIs. Longer measurement period for SSB based CBD measurement is expected, and no requirements are defined.

For FR2, if network configures same or mixed numerology between SSB for CBD measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, UE shall be able to perform the related SSB based measurements in one band without any measurement restrictions in the other band, provided that UE is capable of independent beam management on this FR2 band pair.

8.18.6 Requirements for CSI-RS based candidate beam detection

8.18.6.1 Introduction

The requirements in this clause apply for each CSI-RS resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for a serving cell, provided that the CSI-RS resources configured for candidate beam detection are actually transmitted within UE active DL BWP during the entire evaluation period specified in clause 8.18.6.2.

8.18.6.2 Minimum requirement

Upon request the UE shall be able to evaluate whether the L1-RSRP measured on the configured CSI-RS resource in sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ estimated over the last $T_{\text{Evaluate_CBD_CSI-RS}}$ [ms] period becomes better than the threshold $Q_{\text{in_LR}}$ within $T_{\text{Evaluate_CBD_CSI-RS}}$ [ms] period provided CSI-RS $\hat{E}_s/\text{Iot}$ is according to Annex Table B.2.4.2 for a corresponding band.

The UE shall monitor the configured CSI-RS resources using the evaluation period in table 8.18.6.2-1 and 8.18.6.2-2 corresponding to the non-DRX mode, if the configured DRX cycle $\leq 320\text{ms}$.

The value of $T_{\text{Evaluate_CBD_CSI-RS}}$ is defined in Table 8.18.6.2-1 for FR1.

The value of $T_{\text{Evaluate_CBD_CSI-RS}}$ is defined in Table 8.18.6.2-2 for FR2 with scaling factor $N=8$.

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and
- $P = 1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR2,

- $P = 1$, when candidate beam detection RS is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$ when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is not overlapped with SMTC occasion ($T_{\text{CSI-RS}} < MGRP$)

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$).
- $P = P_{\text{sharing factor}}$, when candidate beam detection RS is not overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{MGRP} - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{\text{SMTCperiod}} \neq MGRP$ or
 - $T_{\text{SMTCperiod}} = MGRP$ and $T_{\text{CSI-RS}} < 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = MGRP$ and $T_{\text{CSI-RS}} = 0.5 \times T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\text{Min}(MGRP, T_{\text{SMTCperiod}})}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap
- $P = \frac{3}{1 - \frac{T_{\text{CSI-RS}}}{MGRP}}$, when candidate beam detection RS is partially overlapped with measurement gap and candidate beam detection RS is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < MGRP$)
- $P_{\text{sharing factor}} = 1$, if the candidate beam detection RS outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and;
 - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{\text{sharing factor}} = 3$, otherwise.

where,

If the high layer in TS 38.331 [2] signaling of *smc2* is present, $T_{\text{SMTCperiod}}$ follows *smc2*; Otherwise $T_{\text{SMTCperiod}}$ follows *smc1*. $T_{\text{SMTCperiod}}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Note: The overlap between CSI-RS for CBD and SMTC means that CSI-RS for CBD is within the SMTC window duration.

Longer evaluation period would be expected if the combination of the CBD-RS resource, SMTC occasion and measurement gap configurations does not meet previous conditions..

Longer evaluation period would be expected if the CSI-RS is on the same OFDM symbols with RLM, BFD, BM-RS, or other CBD-RS, according to the measurement restrictions defined in clause 8.18.6.3.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer CBD evaluation period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

The values of M_{CBD} used in Table 8.18.6.2-1 and Table 8.18.6.2-2 are defined as

- $M_{CBD} = 3$, if the CSI-RS resource configured in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ is transmitted with Density = 3 and over the bandwidth ≥ 24 PRBs.

The values of P_{CBD} used in Table 8.18.6.2-1 and Table 8.18.6.2-2 are defined as

For each CSI-RS resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for PCell or PSCell in EN-DC or NE-DC or SA; or PCell in NR-DC

- $P_{CBD} = 1$.

For each CSI-RS resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for PSCell in NR-DC

- $P_{CBD} = 2$ if UE configured for candidate beam detection on SCell, 1 otherwise.

For each CSI-RS resource in the sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ configured for a SCell

- $P_{CBD} = Z$ in EN-DC or NE-DC or SA.
- $P_{CBD} = 2 * Z$ in NR-DC.

Where Z is the number of band(s) on which UE is performing candidate beam detection only for SCell

- P_{CBD} is the number of band(s) on which UE is performing candidate beam detection only for SCell.

The values of P_{TRP} defined in table 8.18.6.2-2 is defined as 2, if SSB/CSI-RS resource in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$ are overlapped, else it is 1.

Table 8.18.6.2-1: Evaluation period $T_{\text{Evaluate_CBD_CSI-RS}}$ for FR1

Configuration	$T_{\text{Evaluate_CBD_CSI-RS}}$ (ms)
non-DRX, DRX cycle ≤ 320 ms	$\text{Max}(25, \text{Ceil}(M_{CBD} \times P \times P_{CBD}) \times T_{\text{CSI-RS}})$
DRX cycle > 320 ms	$\text{Ceil}(M_{CBD} \times P \times P_{CBD}) \times T_{\text{DRX}}$
Note: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$. T_{DRX} is the DRX cycle length.	

Table 8.18.6.2-2: Evaluation period $T_{\text{Evaluate_CBD_CSI-RS}}$ for FR2

Configuration	$T_{\text{Evaluate_CBD_CSI-RS}}$ (ms)
non-DRX, DRX cycle ≤ 320 ms	$\text{Max}(25, \text{Ceil}(M_{CBD} \times P \times N \times P_{CBD} \times P_{TRP}) \times T_{\text{CSI-RS}})$
DRX cycle > 320 ms	$\text{Ceil}(M_{CBD} \times P \times N \times P_{CBD} \times P_{TRP}) \times T_{\text{DRX}}$
Note: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS resource in the two sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$. T_{DRX} is the DRX cycle length.	

8.18.6.3 Measurement restriction for CSI-RS based candidate beam detection

The SSB mentioned in this clause can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

For both FR1 and FR2, when the CSI-RS for CBD measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for CBD measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for CBD measurement, the UE shall be able to perform CSI-RS based CBD measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS based CBD measurement for without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer measurement period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for CBD measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for CBD measurement without any restriction.

For FR2, when the CSI-RS for CBD measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both CSI-RS for CBD measurement and SSB. Longer evaluation period for CSI-RS based CBD measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for CBD measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both CSI-RS for CBD measurement and the other CSI-RS. Longer evaluation period for CSI-RS based CBD measurement is expected, and no requirements are defined. When two CSI-RSs for CBD measurements are from different sets $\bar{q}_{1,0}$ and $\bar{q}_{1,1}$, UE shall be able to measure both CSI-RSs for CBD measurements.

8.18.7 Requirements for TRP specific Beam Failure Recovery

8.18.7.1 Introduction

For the UE provided with a configuration of PUCCH transmission with a link recovery request (LRR) as described in clause 9.2.4 in TS 38.213 [3], if beam recovery procedure is triggered for any of the TRPs, the UE shall transmit SR for UL resource, followed by MAC CE providing beam index for the corresponding TRP whose radio link quality is worse than $Q_{out,LR}$. The index, q_{new} , provided in the TRP specific BFR MAC CE is provided by higher layer for a periodic CSI-RS configuration or for a SSB, as described in clause 5.17 of TS38.321 [7].

For the UE not provided with a configuration of PUCCH transmission with a link recovery request (LRR) as described in clause 9.2.4 in TS 38.213 [3], if beam recovery procedure is triggered for any of TRPs, the UE shall transmit preamble for UL-SCH resource application, followed by MAC CE providing one index for the corresponding TRP whose radio link quality is worse than $Q_{out,LR}$, and the index q_{new} for a periodic CSI-RS configuration or for a SSB provided by higher layer, as described in clause 5.17 of TS38.321 [7], if any, for a corresponding TRP.

8.18.7.2 Requirement

Provided that UE is configured by *schedulingRequestID-BFR-r17* and/or *schedulingRequestID-BFR2-r17* for BFR set 1 (i.e., TRP1) and BFR set 2 (i.e., TRP2) respectively, a configuration for LRR in a PUCCH transmission, after BFR is triggered on any of the TRPs as described in clause 5.17 of TS38.321 [7], UE shall be capable of transmit PUCCH with a LRR within a period of T on any of the TRPs where BFR running. Where:

- $T = T_1 \times \text{Ceil}((T_2+D)/T_1)$ in which T_1 , T_2 and D are defined as
 - T_1 is equal to the periodicity of PUCCH configured with *schedulingRequestID-BFR-r17* for BFR set 1 *schedulingRequestID-BFR2-r17* for BFR set 2..
 - $T_2 = T_{\text{Evaluate_CBD}}$ is the evaluation period specified in clause 8.18.5 or 8.18.6 for SSB or CSI-RS based candidate beam detection, that is $T_{\text{Evaluate_CBD_SSB}}$ or $T_{\text{Evaluate_CBD_CSI-RS}}$, depending on the applicable reference signal configured for candidate beam detection.
 - $D = [2\text{ms}]$ is the UE Processing time.

8.18.8 Scheduling availability of UE during TRP specific beam failure detection

Scheduling availability restrictions when the UE is performing TRP specific beam failure detection are described in the following clauses.

8.18.8.1 Scheduling availability of UE performing TRP specific beam failure detection with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to TRP specific beam failure detection performed on SSB and CSI-RS configured for BFD with the same SCS as PDSCH or PDCCH in FR1.

8.18.8.2 Scheduling availability of UE performing TRP specific beam failure detection with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to TRP specific beam failure detection when SSB is configured as BFD. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to TRP specific beam failure detection when SSB is configured as BFD.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for TRP specific beam failure detection.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on FR1 serving PCell or PSCell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands than the bands in which PCell or PSCell is configured.

8.18.8.3 Scheduling availability of UE performing TRP specific beam failure detection on FR2

The following scheduling restriction applies due to TRP specific beam failure detection.

- For the case where no RSs are provided for BFD, or when CSI-RS is configured for BFD is explicitly configured and is type-D QCLed with active TCI state for PDCCH or PDSCH, and the CSI-RS is not in a CSI-RS resource set with repetition ON
- There are no scheduling restrictions due to TRP specific beam failure detection performed based on the CSI-RS.
- Otherwise
 - The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH or CSI-RS for tracking or CSI-RS for CQI on BFD-RS resource symbols to be measured for TRP specific beam failure detection.

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions on FR2 serving PCell or PSCell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cells in the bands due to beam failure detection performed on FR2 serving cell(s) in different band(s), provided that UE is capable of independent beam management on this FR2 band pair. Additionally, there is no scheduling restriction if the UE is configured with different numerology between SSB on one FR2 band and data on the other FR2 band provided the UE is configured for IBM operation for the band pair.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE shall receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for BFD measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE shall receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for BFD measurement.

8.18.8.4 Scheduling availability of UE performing TRP specific beam failure detection on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR DC

There are no scheduling restrictions on FR1 serving cell(s) due to TRP specific beam failure detection performed on FR2 serving PCell and/or PSCell.

There are no scheduling restrictions on FR2 serving cell(s) due to TRP specific beam failure detection performed on FR1 serving PCell and/or PSCell.

8.18.9 Scheduling availability of UE during TRP specific candidate beam detection

Scheduling availability restrictions when the UE is performing L1-RSRP measurement for TRP specific candidate beam detection are described in the following clauses.

8.18.9.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as TRP specific link recovery detection resource with the same SCS as PDSCH or PDCCH in FR1.

8.18.9.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as TRP specific link recovery detection resource. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured as TRP specific link recovery detection resource.

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, TRS, CSI-RS for tracking or CSI-RS for CQI on SSB symbols to be measured for L1-RSRP.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on one serving cell apply to all other serving cells in the same band on the symbols that fully or partially overlap with the restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands.

8.18.9.3 Scheduling availability of UE performing L1-RSRP measurement on FR2

The following scheduling restriction applies due to TRP specific candidate beam detection

- The UE is not expected to transmit PUCCH, PUSCH or SRS or receive PDCCH, PDSCH, CSI-RS for tracking or CSI-RS for CQI on reference symbols to be measured for TRP specific candidate beam detection.

When intra-band carrier aggregation in FR2 is configured, the scheduling restrictions on to one serving cell apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cells in the bands due to candidate beam detection performed on FR2 serving cell(s) in different band(s), provided that the FR2 serving cell(s) and the FR2 serving cell(s) for candidate beam detection are in a FR2 band pair and UE is capable of independent beam management on this FR2 band pair. Additionally, there is no scheduling restriction if the UE is

configured with different numerology between SSB on one FR2 band and data on the other FR2 band provided the UE is configured for IBM operation for the band pair.

For FR2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE shall receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for CBD measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE shall receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for CBD measurement.

8.18.9.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA and NR-DC

There are no scheduling restrictions on FR1 serving cell(s) due to L1-RSRP measurement performed on FR2 serving cell(s).

There are no scheduling restrictions on FR2 serving cell(s) due to L1-RSRP measurement performed on FR1 serving cell(s).

8.19 Pre-configured measurement gap activation/deactivation delay

8.19.1 Introduction

The requirements in this clause apply for a UE configured with PCell or any activated SCell in standalone NR.

UE shall complete the activation/deactivation of pre-configured measurement gap within the delay defined in this clause.

8.19.2 Pre-configured measurement gap activation/deactivation upon DCI/timer-based BWP switch

8.19.2.1 Activation/deactivation upon DCI/timer-based BWP switch delay on a single CC

The requirements in this clause only apply to the case that the DCI/timer-based BWP switch is performed on a single CC with more than one BWP configurations configured on the CC.

When BWP switch occurs, which results in status change of pre-configured measurement gap according to clause 9.1.7, UE shall be able to finish pre-configured measurement gap activation or deactivation within 5 ms after the completion of the active BWP switch. The active BWP switch delay for single CC is defined in clause 8.6.2.

Activation/deactivation of Pre-MG takes effect from the first complete MG occasion after the activation and deactivation delay. If the end of activation/deactivation of Pre-MG is within a Pre-MG gap occasion, the Pre-MG status shall not be changed immediately. Instead, the Pre-MG status shall be changed prior to the next Pre-MG gap occasion.

8.19.3 Pre-configured measurement gap activation/deactivation upon SCell activation/deactivation

The requirements in this clause apply when one SCell or multiple SCells are activated/deactivated.

When one SCell or multiple SCells are activated/deactivated, which results in status change of pre-configured measurement gap according to clause 9.1.7, UE shall be able to finish pre-configured measurement gap activation or deactivation within 5 ms after the completion of SCell(s) activation/deactivation. The SCell(s) activation/deactivation delay for is defined in clause 8.3. Activation/deactivation of Pre-MG takes effect from the first complete MG occasion after the SCell(s) activation/deactivation delay. If the end of activation/deactivation of Pre-MG is within a Pre-MG gap occasion, the Pre-MG status shall not be changed immediately. Instead, the Pre-MG status shall be changed prior to the next Pre-MG gap occasion.

8.19.4 Pre-configured measurement gap activation/deactivation upon RRC reconfiguration

The requirements in this clause apply when UE is triggered by the RRC based events defined in clause 9.1.7.3.1 if UE supports autonomous activation/deactivation mechanism and/or in clause 9.1.7.3.2 if UE supports network-controlled activation/deactivation mechanism.

If the aforementioned RRC reconfiguration results in status change of pre-configured measurement gap according to clause 9.1.7, UE shall be able to finish pre-configured measurement gap activation or deactivation within 5 ms after RRC processing delay specified in [2]. If the end of activation/deactivation of Pre-MG is within a Pre-MG gap occasion, the Pre-MG status shall not be changed immediately. Instead, the Pre-MG status shall be changed prior to the next Pre-MG gap occasion.

9 Measurement Procedure

9.1 General measurement requirement

9.1.1 Introduction

This clause contains general requirements on the UE regarding measurement reporting in RRC_CONNECTED state. The requirements are split in intra-frequency, inter-frequency, inter-RAT E-UTRAN FDD, inter-RAT E-UTRAN TDD, and L1-RSRP measurements requirements. These measurements may be used by the NG-RAN. The measurement quantities are defined in TS38.215 [4], the measurement model is defined in TS38.300 [10], TS37.340 [17] and measurement accuracies are specified in clause 10. Control of measurement reporting is specified in TS 38.331 [2].

In the requirements of clause 9, the exceptions for side conditions apply as follows:

- for the UE capable of CA but not configured with any SCell, the applicable exceptions for side conditions are specified in Annex B, clause B.3.2.1 for UE supporting CA in FR1, and clause B.3.2.3 for UE supporting CA in FR2, respectively;
- for the UE capable of CA and configured with at least one SCell, the applicable exceptions for side conditions are specified in Annex B, clause B.3.2.2 for UE configured with CA in FR1, and clause B.3.2.4 for UE supporting CA in FR2, respectively;
- for the UE capable of SUL but not configured with SUL, the applicable exceptions for side conditions are specified in Annex B, clause B.3.4.1 for UE supporting SUL in FR1;
- for the UE capable of SUL and configured with at least one SUL, the applicable exceptions for side conditions are specified in Annex B, clause B.3.4.2 for UE configured with SUL in FR1.

9.1.2 Measurement gap

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells and/or inter-RAT E-UTRAN cells, and the UE does not support independent measurement gap patterns for different frequency ranges as specified in Table 5.1-1 in [18, 19, 20], in order for the requirements in the following clauses to apply the network must provide a single per-UE measurement gap pattern for concurrent monitoring of all frequency layers.

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells and/or inter-RAT E-UTRAN cells, and the UE supports independent measurement gap patterns for different frequency ranges as specified in Table 5.1-1 in [18, 19, 20], in order for the requirements in the following clauses to apply the network must provide either per-FR measurement gap patterns for frequency range where UE requires per-FR measurement gap for concurrent monitoring of all frequency layers of each frequency range independently, or a single per-UE measurement gap pattern for concurrent monitoring of all frequency layers of all frequency ranges.

If the UE is configured via LPP [34] to measure PRS for any RSTD, PRS-RSRP, UE Rx-Tx time difference measurement and PRS-RSRPP measurement defined in TS 38.215 [4], in order for the requirements in clauses 9.9.2, 9.9.3, 9.9.4 and 9.9.6 to apply, the network must provide

- a single per-UE measurement gap pattern for concurrent monitoring of all positioning frequency layers and intra-frequency, inter-frequency and/or inter-RAT frequency layers of all frequency ranges, or
- if UE supports independent measurement gap patterns for different frequency ranges for PRS measurement, i.e. supporting *independentGapConfigPRS-r17*, per-FR measurement gap pattern for the frequency range for concurrent monitoring of all positioning frequency layers and intra-frequency, inter-frequency cells and/or inter-RAT frequency layers in the corresponding frequency range.

During the per-UE measurement gaps the UE:

- is not required to conduct reception/transmission from/to the corresponding E-UTRAN PCell, E-UTRAN SCell(s) and NR serving cells for E-UTRA-NR dual connectivity except the reception of signals used for RRM measurement(s) and the signals used for random access procedure according to TS38.321 [7].

- is not required to conduct reception/transmission from/to the corresponding NR serving cells for SA (with single carrier or CA configured) except the reception of signals used for RRM measurement(s), PRS measurement(s) and the signals used for random access procedure according to [7].
- is not required to conduct reception/transmission from/to the corresponding PCell, SCell(s) and E-UTRAN serving cells for NR-E-UTRA dual connectivity except the reception of signals used for RRM measurement(s), PRS measurement(s) and the signals used for random access procedure according to [7].
- is not required to conduct reception/transmission from/to the corresponding NR serving cells for NR-DC except the reception of signals used for RRM measurement(s), PRS measurement(s) and the signals used for random access procedure according to [7].

During the per-FR measurement gaps the UE:

- is not required to conduct reception/transmission from/to the corresponding E-UTRAN PCell, E-UTRAN SCell(s) and NR serving cells in the corresponding frequency range for E-UTRA-NR dual connectivity except the reception of signals used for RRM measurement(s) and the signals used for random access procedure according to TS38.321 [7].
- is not required to conduct reception/transmission from/to the corresponding NR serving cells in the corresponding frequency range for SA (with single carrier or CA configured) except the reception of signals used for RRM measurement(s), PRS measurement(s) and the signals used for random access procedure according to TS38.321 [7].
- is not required to conduct reception/transmission from/to the corresponding PCell, SCell(s) and E-UTRAN serving cells in the corresponding frequency range for NR-E-UTRA dual connectivity except the reception of signals used for RRM measurement(s), PRS measurement(s) and the signals used for random access procedure according to TS38.321 [7].
- is not required to conduct reception/transmission from/to the corresponding NR serving cells in the corresponding frequency range for NR-DC except the reception of signals used for RRM measurement(s), PRS measurement(s) and the signals used for random access procedure according to TS38.321 [7].

UEs shall support the measurement gap patterns listed in Table 9.1.2-1 based on the applicability specified in table 9.1.2-2 and 9.1.2-3. UE determines measurement gap timing based on gap offset configuration and measurement gap timing advance configuration provided by higher layer signalling as specified in TS 38.331 [2] and TS 36.331 [16].

Table 9.1.2-1: Gap Pattern Configurations

Gap Pattern Id	Measurement Gap Length (MGL, ms)	Measurement Gap Repetition Period (MGRP, ms)
0	6	40
1	6	80
2	3	40
3	3	80
4	6	20
5	6	160
6	4	20
7	4	40
8	4	80
9	4	160
10	3	20
11	3	160
12	5.5	20
13	5.5	40
14	5.5	80
15	5.5	160
16	3.5	20
17	3.5	40
18	3.5	80
19	3.5	160
20	1.5	20
21	1.5	40

22	1.5	80
23	1.5	160
24	10	80
25	20	160

Table 9.1.2-2: Applicability for Gap Pattern Configurations supported by the E-UTRA-NR dual connectivity UE or NR-E-UTRA dual connectivity UE

Measurement gap pattern configuration	Serving cell	Measurement Purpose ^{Note 5}	Applicable Gap Pattern Id
Per-UE Measurement gap	E-UTRA + FR1, or E-UTRA + FR2, or E-UTRA + FR1 + FR2	non-NR RAT ^{Note1,2}	0,1,2,3
		FR1 and/or FR2 ^{Note 6,7}	0-11, 24, 25
		non-NR RAT ^{Note1,2} and FR1 and/or FR2 ^{Note 6,7}	0, 1, 2, 3, 4, 6, 7, 8,10, 24
Per-FR measurement gap	E-UTRA and, FR1 if configured	non-NR RAT ^{Note1,2}	0,1,2,3
	FR2 if configured		No gap
	E-UTRA and, FR1 if configured	FR1 only ^{Note 6,7}	0-11,24,25
	FR2 if configured		No gap
	E-UTRA and, FR1 if configured	FR2 only ^{Note 6,7}	No gap
	FR2 if configured		12-25
	E-UTRA and, FR1 if configured	non-NR RAT ^{Note1,2} and FR1 ^{Note 6,7}	0, 1, 2, 3, 4, 6, 7, 8,10,24
	FR2 if configured		No gap
	E-UTRA and, FR1 if configured	FR1 and FR2 ^{Note 6,7}	0-11,24,25
	FR2 if configured		12-25
	E-UTRA and, FR1 if configured	non-NR RAT ^{Note1,2} and FR2 ^{Note 6,7}	0, 1, 2, 3, 4, 6, 7, 8,10,24
	FR2 if configured		12-25
	E-UTRA and, FR1 if configured	Non-NR RAT ^{Note1,2} and FR1 and FR2 ^{Note 6,7}	0, 1, 2, 3, 4, 6, 7, 8,10,24
	FR2 if configured		12-25
Note: In E-UTRA-NR dual connectivity mode, if GSM or UTRA TDD or UTRA FDD inter-RAT frequency layer is configured to be monitored, only measurement gap pattern #0 and #1 can be used for per-FR gap in E-UTRA and FR1 if configured, or for per-UE gap. In NR-E-UTRA dual connectivity mode, if UTRA FDD inter-RAT frequency layer is configured to be monitored for SRVCC, only measurement gap pattern #0 and #1 can be used for per-FR gap in E-UTRA and FR1 if configured, or for per-UE gap. NOTE 1: In E-UTRA-NR dual connectivity mode, non-NR RAT includes E-UTRA, UTRA and/or GSM. In NR-E-UTRA dual connectivity mode, non-NR RAT means E-UTRA, and UTRA for SRVCC. NOTE 2: Void NOTE 3: When E-UTRA inter-frequency RSTD measurements are configured and the UE requires measurement gaps for performing such measurements, only Gap Pattern #0 can be used. NOTE 4: For UE supporting <i>supportedGapPattern-NRonly-NEDC</i> or <i>measGapPatterns-NRonly-ENDC-r16</i> but not supporting <i>supportedGapPattern</i> for the corresponding gap patterns among GP2-11, the corresponding gap patterns are not applicable to measurement of non-NR RATs as defined in NOTE 1. NOTE 5: Inclusion of positioning measurements: Measurement purpose which includes E-UTRA measurements includes also E-UTRA RSRP and E-UTRA RSRQ measurements for E-CID. NOTE 6: Measurement gap patterns #24 and #25 can be requested [2] only when the UE is configured at least with any of RSTD, UE Rx-Tx, PRS-RSRP or PRS-RSRPP measurements requiring such gaps and can only be used during the corresponding positioning measurement period NOTE 7: Inclusion of positioning measurements for measurement gaps: Measurement purpose which includes any of FR1 and FR2 measurements includes also RSTD, UE Rx-Tx, PRS-RSRP and PRS-RSRPP measurements			

In E-UTRA-NR dual connectivity mode,

- if per-UE measurement gap is configured with MG timing advance of T_{MG} ms, the measurement gap starts at time T_{MG} ms advanced to the end of the latest E-UTRA subframe occurring immediately before the configured measurement gap among MCG serving cells subframes.
- if per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest E-UTRA subframe occurring immediately before the configured measurement gap among MCG serving cells subframes.
- if per-FR measurement gap for FR2 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR2 starts at time T_{MG} ms advanced to the end of the latest NR subframe occurring immediately before the configured measurement gap among SCG serving cells subframes in FR2.

In NR-E-UTRA dual connectivity mode,

- if per-UE measurement gap is configured with MG timing advance of T_{MG} ms, the measurement gap starts at time T_{MG} ms advanced to the end of the latest NR subframe occurring immediately before the configured measurement gap among MCG serving cells subframes.
- if per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms and UE has NR serving cell in FR1, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest NR subframe occurring immediately before the configured measurement gap among MCG serving cells subframes in FR1.
- if per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms and UE doesn't have NR serving cell in FR1, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest E-UTRA subframe occurring immediately before the configured measurement gap among SCG serving cells subframes.
- if per-FR measurement gap for FR2 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR2 starts at time T_{MG} ms advanced to the end of the latest NR subframe occurring immediately before the configured measurement gap among MCG serving cells subframes in FR2.

In NR-NR dual connectivity mode,

- If per-UE measurement gap is configured with MG timing advance of T_{MG} ms, the measurement gap starts at time T_{MG} ms advanced to the end of the latest MCG subframe occurring immediately before the configured measurement gap among MCG serving cells subframes.
- If per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest MCG subframe occurring immediately before the configured measurement gap among MCG serving cells subframes.
- If per-FR measurement gap for FR2 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR2 starts at time T_{MG} ms advanced to the end of the latest SCG subframe occurring immediately before the configured measurement gap among SCG serving cells subframes in FR2.

T_{MG} is the MG timing advance value provided in *mgta* according to TS38.331 [2].

In determining the measurement gap starting point, UE shall use the DL timing of the latest E-UTRA or NR subframe occurring immediately before the configured measurement gap among E-UTRA or NR serving cells.

For per-FR measurement gap capable UE configured with E-UTRA-NR dual connectivity or NR-E-UTRA dual connectivity, when serving cells are in E-UTRA and FR1, measurement objects are in both E-UTRA/FR1 and FR2,

- If MN indicates UE that the measurement gap from MN applies to E-UTRA/FR1/FR2 serving cells, UE fulfils the per-UE measurement requirements for both E-UTRA/FR1 and FR2 measurement objects based on the measurement gap pattern configured by MN;
- If MN indicates UE that the measurement gap from MN applies to only LTE/FR1 serving cell(s),
 - UE fulfils the measurement requirements for FR1/LTE measurement objects based on the configured measurement gap pattern;
 - UE fulfils the requirements for FR2 measurement objects based on effective $MGRP=20ms$;

For per-FR measurement gap capable configured with E-UTRA-NR dual connectivity, NR-E-UTRA dual connectivity or NR-NR dual connectivity, when serving cells are in E-UTRA, FR1 and FR2, or in E-UTRA and FR2, or in FR1 and FR2, measurement objects are in both E-UTRA /FR1 and FR2,

- If MN indicates UE that the measurement gap from MN applies to E-UTRA/FR1/FR2 serving cells, UE fulfils the per-UE measurement requirements for both E-UTRA/FR1 and FR2 measurement objects based on the measurement gap pattern configured by MN.

Table 9.1.2-3: Applicability for Gap Pattern Configurations supported by the UE with NR standalone operation (with single carrier, NR CA and NR-DC configuration)

Measurement gap pattern configuration	Serving cell	Measurement Purpose ^{NOTE 2}	Applicable Gap Pattern Id
Per-UE measurement gap	FR1 ^{NOTE5} , or FR1 + FR2	non-NR RAT ^{NOTE3,6}	0,1,2,3
		FR1 and/or FR2 ^{NOTE 8,9}	0-11, 24, 25
		non-NR RAT and FR1 and/or FR2 ^{NOTE3,6,8,9}	0, 1, 2, 3, 4, 6, 7, 8,10, 24
	FR2 ^{NOTE5}	non-NR RAT only ^{NOTE3,6}	0,1,2,3
		FR1 only ^{NOTE 8,9}	0-11, 24, 25
		FR1 and FR2 ^{NOTE 8,9}	0-11, 24, 25
		non-NR RAT and FR1 and/or FR2 ^{NOTE3,6,8,9}	0, 1, 2, 3, 4, 6, 7, 8,10, 24
		FR2 only ^{NOTE 8,9}	12-25
Per-FR measurement gap	FR1 if configured	non-NR RAT only ^{NOTE3,6}	0,1,2,3
	FR2 if configured		No gap
	FR1 if configured	FR1 only ^{NOTE 8,9}	0-11,24,25
	FR2 if configured		No gap
	FR1 if configured	FR2 only ^{NOTE 8,9}	No gap
	FR2 if configured		12-25
	FR1 if configured	non-NR RAT and FR1 ^{NOTE3,6,8,9}	0, 1, 2, 3, 4, 6, 7, 8,10,24
	FR2 if configured		No gap
	FR1 if configured	FR1 and FR2 ^{NOTE 8,9}	0-11, 24,25
	FR2 if configured		12-25
	FR1 if configured	non-NR RAT and FR2 ^{NOTE3,6,8,9}	0, 1, 2, 3, 4, 6, 7, 8,10,24
	FR2 if configured		12-25
	FR1 if configured	non-NR RAT and FR1 and FR2 ^{NOTE3,6,8,9}	0, 1, 2, 3, 4, 6, 7, 8,10,24
	FR2 if configured		12-25

- NOTE 1: When E-UTRA inter-RAT RSTD measurements are configured and the UE requires measurement gaps for performing such measurements, only Gap Pattern #0 can be used.
- NOTE 2: Measurement purpose which includes E-UTRA measurements includes also inter-RAT E-UTRA RSRP and RSRQ measurements for E-CID; measurement purpose which includes E-UTRA measurements includes also E-UTRA RSRP and E-UTRA RSRQ measurements for E-CID.
- NOTE 3: Void
- NOTE 4: If per-UE measurement gap is configured with MG timing advance of T_{MG} ms, the measurement gap starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured measurement gap among all serving cells subframes. If per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured measurement gap among serving cells subframes in FR1. If per-FR measurement gap for FR2 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR2 starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured measurement gap among serving cells subframes in FR2. T_{MG} is the MG timing advance value provided in *mgta* according to [2]. In determining the measurement gap starting point, UE shall use the DL timing of the latest subframe occurring immediately before the configured measurement gap among serving cells.
- NOTE 5: NR-DC in Rel-15 only includes the scenarios where all serving cells in MCG in FR1 and all serving cells in SCG in FR2.
- NOTE 6: In NR single carrier, NR CA, and NR-DC mode, non-NR RAT means E-UTRA, and UTRA for SRVCC. In NR single carrier, NR CA, and NR-DC mode, if UTRA FDD inter-RAT frequency layer is configured to be monitored for SRVCC, only measurement gap pattern #0 and #1 can be used for per-FR gap in E-UTRA and FR1 if configured, or for per-UE gap.
- NOTE 7: For UE only supporting *supportedGapPattern-NRonly* for any gap patterns among GP2-11, the corresponding gap patterns are not applicable to measurement of non-NR RATs as defined in NOTE 6.
- NOTE 8: Measurement gap patterns #24 and #25 can be requested [2] only when the UE is configured with any of RSTD, UE Rx-Tx, PRS-RSRP or PRS-RSRPP measurements requiring such gaps and can only be used during the corresponding positioning measurement period.
- NOTE 9: Inclusion of positioning measurements for measurement gaps: Measurement purpose which includes any of FR1 and FR2 measurements includes also RSTD, UE Rx-Tx, PRS-RSRP and PRS-RSRPP measurements.

For per-FR measurement gap capable UE in NR standalone operation (with single carrier, NR CA and NR-DC configuration), for per-FR gap based measurement, when there is no serving cell in a particular FR, where measurement objects are configured, regardless if explicit per-FR measurement gap is configured in this FR, the effective MGRP in this FR is used to determine requirements;

- 20 ms for FR2 NR measurements
- 40 ms for FR1 NR measurements
- 40 ms for LTE measurements
- 40 ms for FR1+LTE measurements

For per-FR measurement gap capable UE in NR standalone operation (with single carrier, NR CA and NR-DC configuration), when serving cells are in FR1 or FR2, measurement objects are in both E-UTRA /FR1 and FR2,

- If MN indicates UE that the measurement gap from MN applies to E-UTRA/FR1/FR2 serving cells, UE fulfils the per-UE measurement requirements for both E-UTRA/FR1 and FR2 measurement objects based on the measurement gap pattern configured by MN;

If measurement gap is configured in one FR but measurement object is not configured in the FR, the scheduling opportunity in the FR depends on the configured measurement gap pattern.

For single carrier or CA with aligned frame boundaries,

For E-UTRA-NR dual connectivity (with NR single carrier, NR CA configuration), if UE is not capable of per-FR-gap, total interruption time on SCG during MGL is defined only when $MGL(N) = 20\text{ms}, 10\text{ms}, 6\text{ms}, 4\text{ms}$ and 3ms . And if UE is capable of per-FR-gap, total interruption time on FR1 serving cells in SCG during MGL


is defined only when $MGL(N) = 20\text{ms}$, 10ms , 6ms , 4ms and 3ms , and total interruption time on FR2 serving cells in SCG during MGL is defined only when $MGL(N) = 20\text{ms}$, 10ms , 5.5ms , 3.5ms and 1.5ms .

For NR standalone operation (with single carrier, NR CA and NR-DC configuration), if UE is not capable of per-FR-gap, total interruption time on a serving cell during MGL is defined when $MGL(N) = 20\text{ms}$, 10ms , 6ms , 5.5ms , 4ms , 3.5ms , 3ms , and 1.5ms . And if UE is capable of per-FR-gap, total interruption time on FR1 serving cells during MGL is defined only when $MGL(N) = 20\text{ms}$, 10ms , 6ms , 4ms , and 3ms , and total interruption time on FR2 serving cells during MGL is defined only when $MGL(N) = 20\text{ms}$, 10ms , 5.5ms , 3.5ms , and 1.5ms .


For NR-E-UTRA dual connectivity (with NR single carrier, NR CA configuration), if UE is not capable of per-FR-gap, total interruption time on MCG during MGL is defined only when $MGL(N) = 20\text{ms}$, 10ms , 6ms , 4ms , and 3ms . And if UE is capable of per-FR-gap, total interruption time on FR1 serving cells in MCG during MGL is defined only when $MGL(N) = 20\text{ms}$, 10ms , 6ms , 4ms , and 3ms , and total interruption time on FR2 serving cells in MCG during MGL is defined only when $MGL(N) = 20\text{ms}$, 10ms , 5.5ms , 3.5ms , and 1.5ms .

For CA with non-aligned frame boundaries,


- The total interruption time on an SCC is the same as the case CA with aligned frame boundaries, if no SCC slots are partially overlapped with the measurement gap.
- The total interruption time on an SCC will be additionally extended by one SCC slot, if there exist SCC slots partially overlapped with the measurement gap.

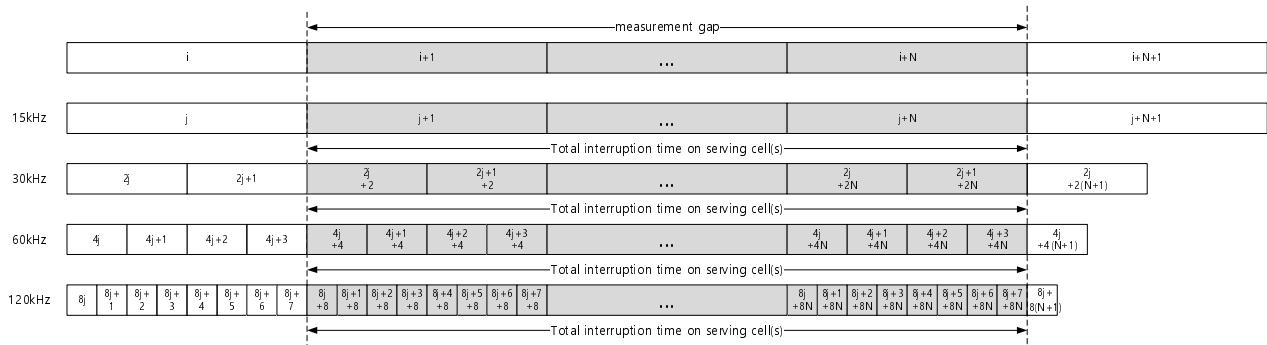


(a) Measurement gap with $MGL = N(\text{ms})$ with MG timing advance of 0ms for all serving cells in synchronous EN-DC, NR standalone operation (with single carrier, NR CA and synchronous NR-DC configuration) and synchronous NE-DC, and for serving cells in MCG in NR standalone operation (with asynchronous NR-DC configuration)

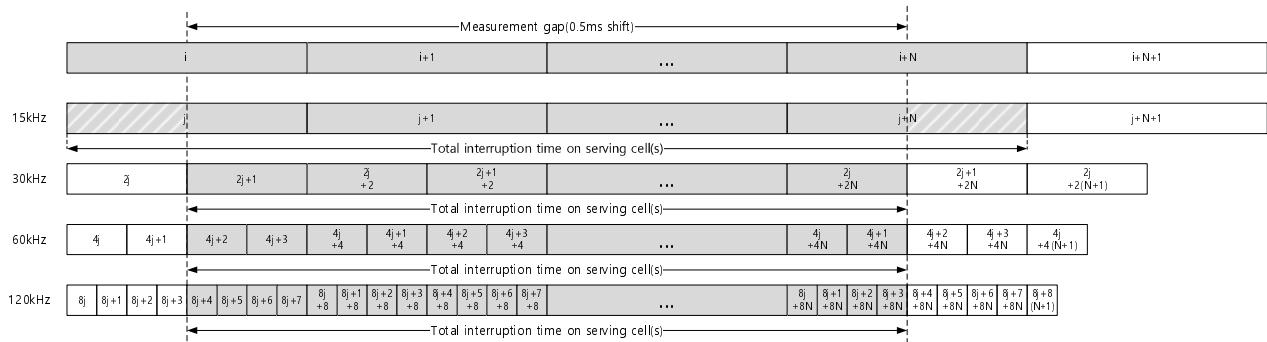

(b) Measurement gap with $MGL = N(\text{ms})$ with MG timing advance of 0.5ms for all serving cells in synchronous EN-DC, NR standalone operation (with single carrier, NR CA and synchronous NR-DC configuration) and synchronous NE-DC, and for serving cells in MCG in NR standalone operation (with asynchronous NR-DC configuration)

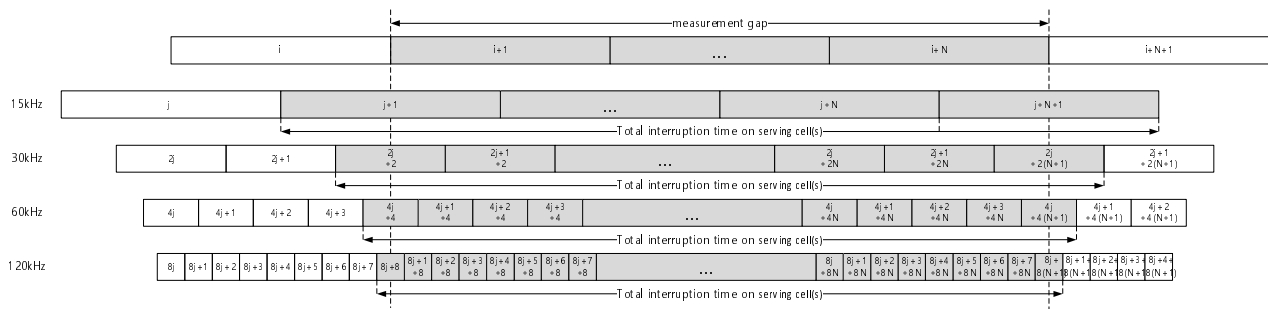

(c) Measurement gap with MGL = N(ms) with MG timing advance of 0ms for all serving cells in asynchronous EN-DC and asynchronous NE-DC, and for serving cells in SCG in NR standalone operation (with asynchronous NR-DC configuration)

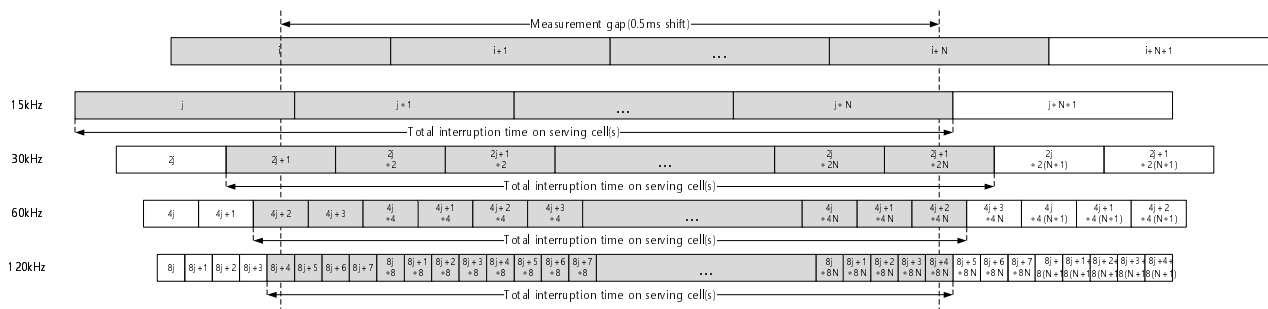

(d) Measurement gap with MGL = N(ms) with MG timing advance of 0.5ms for all serving cells in asynchronous EN-DC and asynchronous NE-DC, and for serving cells in SCG in NR standalone operation (with asynchronous NR-DC configuration)

Figure 9.1.2-1: Measurement GAP and total interruption time on serving cells for EN-DC, NR standalone operation (with single carrier, NR CA and NR-DC configuration) and NE-DC

The corresponding total number of interrupted slots on serving cells is listed in Table 9.1.2-4 for all serving cells in synchronous EN-DC, NR standalone (with single carrier, NR CA and synchronous NR-DC configuration) and NE-DC, and for serving cells in MCG in NR standalone operation (with asynchronous NR-DC configuration). The corresponding total number of interrupted slots on serving cells is listed in Table 9.1.2-4a for asynchronous EN-DC, and for serving cells in SCG in NR standalone operation (with asynchronous NR-DC configuration).

Table 9.1.2-4: Total number of interrupted slots on all serving cells during MGL for Synchronous EN-DC, NR standalone operation (with single carrier, NR CA and synchronous NR-DC configuration) and NE-DC, and on all serving cells in MCG for NR standalone operation (with asynchronous NR-DC configuration) with per-UE measurement gap or per-FR measurement gap for FR1

NR SC S (kHz)	Total number of interrupted slots on serving cells									
	When MG timing advance of 0ms is applied					When MG timing advance of 0.5ms is applied				
	MGL=20 ms	MGL=10 ms	MGL=6 ms	MGL=4 ms	MGL=3 ms	MGL=20 ms	MGL=10 ms	MGL=6 ms	MGL=4 ms	MGL=3 ms
15	20	10	6	4	3	21 ^{Note3}	11 ^{Note3}	7 ^{Note3}	5 ^{Note3}	4 ^{Note3}
30	40	20	12	8	6	40	20	12	8	6
60	80	40	24	16	12	80	40	24	16	12
120	160	80	48	32	24	160	80	48	32	24
480 ^{Note4}	640	320	192	128	96	640	320	192	128	96
480 ^{Note5}	641	321	193	129	97	641	321	193	129	97
960 ^{Note4}	1280	640	384	256	192	1280	640	384	256	192
960 ^{Note5}	1281	641	385	257	193	1281	641	385	257	193

NOTE 1: Void.

NOTE 2: NR SCSSs of 120 kHz, 480kHz and 960kHz are only applicable to the case with per-UE measurement gap.

- NOTE 3: Non-overlapped half-slots occur before and after the measurement gap. Whether a Rel-15 UE can receive and/or transmit in those half-slots is up to UE implementation.
- NOTE 4: For NR SCSs of 480kHz and 960kHz, total number of interrupted slots on all serving cells during MGL for single carrier, intra-band NR CA with per-UE measurement gap.
- NOTE 5: For NR SCSs of 480kHz and 960kHz, total number of interrupted slots on all serving cells in SCG for inter-band NR-CA and synchronous NR-DC with per-UE measurement gap.

Table 9.1.2-4a: Total number of interrupted slots on serving cells during MGL for Asynchronous EN-DC, and on all serving cells in SCG for NR standalone operation (with asynchronous NR-DC configuration) with per-UE measurement gap or per-FR measurement gap for FR1

NR SCS (kHz)	Total number of interrupted slots on serving cells									
	When MG timing advance of 0ms is applied					When MG timing advance of 0.5ms is applied				
	MGL=20 ms	MGL=10 ms	MGL=6 ms	MGL=4 ms	MGL=3 ms	MGL=20 ms	MGL=10 ms	MGL=6 ms	MGL=4 ms	MGL=3 ms
15	21	11	7	5	4	21	11	7	5	4
30	41	21	13	9	7	41	21	13	9	7
60	81	41	25	17	13	81	41	25	17	13
120	161	81	49	33	25	161	81	49	33	25
480 Note3	641	321	193	129	97	641	321	193	129	97
960 Note3	1281	641	385	257	193	1281	641	385	257	193
NOTE 1: Void.										
NOTE 2: NR SCSs of 120 kHz, 480kHz and 960kHz are only applicable to the case with per-UE measurement gap.										
NOTE 3: For NR SCSs of 480kHz and 960kHz, total number of interrupted slots on all serving cells in SCG for asynchronous NR-DC with per-UE measurement gap.										

In case that UE capable of per-FR measurement gap is configured with per-FR measurement gap for FR2 serving cells, total number of interrupted slots on FR2 serving cells during MGL is listed in Table 9.1.2-4b.

Table 9.1.2-4b: Total number of interrupted slots on FR2 serving cells during MGL for EN-DC, NR standalone operation (with single carrier, NR CA and NR-DC configuration) and NE-DC with per-UE measurement gap or per-FR measurement gap for FR2

NR SCS (kHz)	Total number of interrupted slots on FR2 serving cells									
	When MG timing advance of 0ms is applied					When MG timing advance of 0.25ms is applied				
	MGL=20ms	MGL=10ms	MGL=5.5ms	MGL=3.5ms	MGL=1.5ms	MGL=20ms	MGL=10ms	MGL=5.5ms	MGL=3.5ms	MGL=1.5ms
60	80	40	22	14	6	80	40	22	14	6
120	160	80	44	28	12	160	80	44	28	12
480 Note3	640	320	176	112	48	640	320	176	112	48
960 Note3	1280	640	352	224	96	1280	640	352	224	96
NOTE 1: The total number of interrupted slots is based on that SFN and subframe reference for per-FR gap in FR2 indicated by high layer parameter <i>refServCellIndicator</i> is an FR2 serving cell.										
NOTE 2: Slot occurs before or after the measurement gap may be interrupted additionally if SFN and subframe reference for per-FR gap in FR2 indicated by high layer parameter <i>refServCellIndicator</i> is an FR1 serving cell.										
NOTE 3: For NR SCSs of 480kHz and 960kHz, Total number of interrupted slots on FR2-2 serving cells during MGL for NR standalone operation (single carrier, NR CA and NR-DC) with per-UE measurement gap or per-FR measurement gap for FR2-2.										
NOTE 4: If UE is configured with per-UE measurement gap, the MG timing advance of 0.25 is applicable only for FR2 NR SA (with both single carrier and NR CA configuration).										

It is up to UE implementation whether or not the UE is able to conduct transmission in the following slot(s),

- when MGTA is not applied, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after measurement gap

- when MGTA is applied and the SCS of the UL carrier is other than 15kHz, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after measurement gap
- when MGTA is applied and the SCS of the UL carrier is 15kHz, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after the slot partially overlapped with measurement gap

where UL slot denotes that all the symbols in the slot are uplink symbols, and $L=1$ if $(N_{TA} + N_{TA\ offset}) \times T_c$ for the UL transmission is less than the length of one slot; $L=2$ otherwise.

Note: Network is supposed to take into account the possible difference between the estimated TA at network and actual TA at UE when scheduling UE in the above slot(s).

Table 9.1.2-5: (Void)

If a positioning measurement gap is configured via *PosGapConfig* and activated by MAC CE, the measurement requirements do not apply for RRM measurement that requires measurement gaps.

9.1.2.1 EN-DC: Measurement Gap Sharing

For E-UTRA-NR dual connectivity UE configured with per-UE measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on intra-frequency carriers for both SSB and CSI-RS based L3 measurement or when SMTC configured for intra-frequency measurement are fully overlapping with per-UE measurement gaps, and when UE requires measurement gaps to identify and measure cells on inter-frequency carriers or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-UE measurement gaps, E-UTRA gap-needed inter-frequency carriers and inter-RAT UTRAN carriers and/or inter-RAT GSM carriers.

For E-UTRA-NR dual connectivity UE configured with per-FR1 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR1 intra-frequency carriers or when SMTC configured for FR1 intra-frequency measurement are fully overlapping with per-FR1 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR1 inter-frequency carriers for both SSB and CSI-RS based L3 measurement or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR1 measurement gaps, E-UTRA gap-needed inter-frequency carriers, inter-RAT UTRAN carriers and/or inter-RAT GSM carriers.

For E-UTRA-NR dual connectivity UE configured with per-FR2 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR2 intra-frequency carriers or when SMTC configured for FR2 intra-frequency measurement are fully overlapping with per-FR2 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR2 inter-frequency carriers for both SSB and CSI-RS based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR2 measurement gaps.

When network signals “01”, “10” or “11” with RRC parameter *MeasGapSharingScheme* [2][16] and the value of X is defined as in Table 9.1.2.1-1, and

- $K_{intra} = 1 / X * 100$,
- $K_{inter} = 1 / (100 - X) * 100$,

When network signals “00” indicating equal splitting gap sharing, X is not applied.

The RRC parameter *MeasGapSharingScheme* shall be applied to the calculation of carrier specific scaling factor as specified in clause 9.1.5.2.1.

Table 9.1.2.1-1: Value of parameter X for EN-DC measurement gap sharing

<i>measGapSharingScheme</i>	Value of X (%)
‘00’	Equal splitting
‘01’	25
‘10’	50

	'11'	75
Note:	It is left to UE implementation to determine which measurement gap sharing scheme in the table <i>to be applied</i> , when <i>MeasGapSharingScheme</i> is absent and there is no stored value in the field.	

9.1.2.1a SA: Measurement Gap Sharing

For NR standalone UE without NR-DC operation and configured with per-UE measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on intra-frequency carriers or when SMTC configured for intra-frequency measurement are fully overlapping with per-UE measurement gaps, and when UE requires measurement gaps to identify and measure cells on inter-frequency carriers for both SSB and CSI-RS based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-UE measurement gaps, and/or inter-RAT E-UTRAN carriers, and/or inter-RAT UTRAN carriers for SRVCC, and when UE is configured to measure positioning frequency layers.

For NR standalone UE without NR-DC operation and configured with per-FR1 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR1 intra-frequency carriers or when SMTC configured for FR1 intra-frequency measurement are fully overlapping with per-FR1 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR1 inter-frequency carriers for both SSB and CSI-RS based L3 measurement and/or inter-RAT E-UTRAN carriers, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR1 measurement gaps, and/or inter-RAT UTRAN carriers for SRVCC, and when UE is configured to measure positioning frequency layers in FR1.

For NR standalone UE without NR-DC operation and configured with per-FR2 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR2 intra-frequency carriers or when SMTC configured for FR2 intra-frequency measurement are fully overlapping with per-FR2 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR2 inter-frequency carriers for both SSB and CSI-RS based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR2 measurement gaps, and when UE is configured to measure positioning frequency layers in FR2.

When network signals "01", "10" or "11" with RRC parameter *MeasGapSharingScheme* [2] and the value of X is defined as in Table 9.1.2.1a-1, and

- $K_{\text{intra}} = 1 / X * 100$,
- $K_{\text{inter}} = 1 / (100 - X) * 100$,

When network signals "00" indicating equal splitting gap sharing, X is not applied.

The RRC parameter *MeasGapSharingScheme* shall be applied to the calculation of carrier specific scaling factor as specified in clause 9.1.5.2.2.

Table 9.1.2.1a-1: Value of parameter X for NR standalone measurement gap sharing

<i>measGapSharingScheme</i>	Value of X (%)
'00'	Equal splitting
'01'	25
'10'	50
'11'	75
Note:	It is left to UE implementation to determine which measurement gap sharing scheme in the table <i>to be applied</i> , when <i>MeasGapSharingScheme</i> is absent and there is no stored value in the field.

9.1.2.1b NE-DC: Measurement Gap Sharing

For NR-E-UTRA dual connectivity UE configured with per-UE measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on intra-frequency carriers or when SMTC configured for intra-frequency measurement are fully overlapping with per-UE measurement gaps, and when UE requires measurement gaps to identify and measure cells on inter-frequency carriers, E-UTRA gap-needed inter-frequency carriers for both SSB and CSI-RS based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-UE measurement gaps, and/or inter-RAT E-UTRA carriers, and/or inter-RAT UTRAN carriers for SRVCC, and when UE is configured to measure positioning frequency layers.

For NR-E-UTRA dual connectivity UE configured with per-FR1 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR1 intra-frequency carriers or when SMTC configured for FR1 intra-frequency measurement are fully overlapping with per-FR1 measurement gaps, and when UE requires measurement gaps to identify and measure cells on inter-frequency carriers for both SSB and CSI-RS based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR1 measurement gaps, E-UTRA gap-needed inter-frequency carriers, and/or inter-RAT E-UTRA carriers, and/or inter-RAT UTRAN carriers for SRVCC, and when UE is configured to measure positioning frequency layers in FR1.

For NR-E-UTRA dual connectivity UE configured with per-FR2 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR2 intra-frequency carriers or when SMTC configured for FR2 intra-frequency measurement are fully overlapping with per-FR2 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR2 inter-frequency carriers for both SSB and CSI-RS based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR2 measurement gaps, and when UE is configured to measure positioning frequency layers in FR2.

When network signals “01”, “10” or “11” with RRC parameter *measGapSharingConfig* [2][16] and the value of X is defined as in Table 9.1.2.1b-1, and

- $K_{\text{intra}} = 1 / X * 100$,
- $K_{\text{inter}} = 1 / (100 - X) * 100$,

When network signals “00” indicating equal splitting gap sharing, X is not applied.

The RRC parameter *MeasGapSharingScheme* shall be applied to the calculation of carrier specific scaling factor as specified in clause 9.1.5.2.3.

Table 9.1.2.1b-1: Value of parameter X for NE-DC measurement gap sharing

<i>measGapSharingScheme</i>	Value of X (%)
‘00’	Equal splitting
‘01’	25
‘10’	50
‘11’	75
Note:	It is left to UE implementation to determine which measurement gap sharing scheme in the table <i>to be applied</i> , when <i>MeasGapSharingScheme</i> is absent and there is no stored value in the field.

9.1.2.1c NR-DC: Measurement Gap Sharing

For UE with NR-DC operation and configured with per-UE measurement gap, measurement gap sharing shall be applied when UE required measurement gaps to identify and measure cells on intra-frequency carriers or when SMTC configured for intra-frequency measurement are fully overlapping with per-UE measurement gaps, and when UE requires measurement gaps to identify and measure cells on inter-frequency carriers for both SSB and CSI-RS based L3 measurement, and/or inter-RAT E-UTRAN carriers, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-UE measurement gaps, and/or inter-RAT UTRAN carriers for SRVCC, and when UE is configured to measure positioning frequency layers.

For UE with NR-DC operation and configured with per-FR1 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR1 intra-frequency carriers or when SMTC configured for FR1 intra-frequency measurement are fully overlapping with per-FR1 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR1 inter-frequency carriers for both SSB and CSI-RS based L3 measurement and/or inter-RAT E-UTRAN carriers, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR1 measurement gaps, and/or inter-RAT UTRAN carriers for SRVCC, and when UE is configured to measure positioning frequency layers in FR1.

For UE with NR-DC operation and configured with per-FR2 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR2 intra-frequency carriers or when SMTC configured for FR2 intra-frequency measurement are fully overlapping with per-FR2 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR2 inter-frequency carriers for both SSB and CSI-RS based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR2 measurement gaps, and when UE is configured to measure positioning frequency layers in FR2.

When network signals “01”, “10” or “11” with RRC parameter *measGapSharingConfig* [2] and the value of X is defined as in Table 9.1.2.1c-1, and

- $K_{\text{intra}} = 1 / X * 100$,
- $K_{\text{inter}} = 1 / (100 - X) * 100$,

When network signals “00” indicating equal splitting gap sharing, X is not applied.

The RRC parameter *MeasGapSharingScheme* shall be applied to the calculation of carrier specific scaling factor as specified in clause 9.1.5.2.4.

Table 9.1.2.1c-1: Value of parameter X for NR-DC measurement gap sharing

<i>measGapSharingConfig</i>	Value of X (%)
'00'	Equal splitting
'01'	25
'10'	50
'11'	75
Note: It is left to UE implementation to determine which measurement gap sharing scheme in the table <i>to be applied</i> , when <i>MeasGapSharingScheme</i> is absent and there is no stored value in the field.	

9.1.3 UE Measurement capability

9.1.3.1 EN-DC: Monitoring of multiple layers using gaps

The requirements in this clause are applicable for UE capable of and configured with the EN-DC operation mode.

When monitoring of multiple inter-frequency E-UTRAN, inter-RAT NR, GSM, UTRA FDD and UTRA TDD carriers as configured by E-UTRA PCell, and inter-frequency NR carriers (with or without CCA) as configured by PCell using gaps (or without using gaps provided the UE supports such capability or the effective MGRP is applied for per-FR measurement gap capable UE) is configured, the UE shall be capable of performing one measurement of the configured measurement type (SS-RSRP, SS-RSRQ, SS-SINR, CSI-RSRP, CSI-RSRQ, CSI-SINR, SFTD, E-UTRAN RSRP, E-UTRAN RSRQ, E-UTRAN RS-SINR measurements, UTRAN TDD P-CCPCH RSCP, UTRAN FDD CPICH measurements, GSM carrier RSSI, etc.) of detected cells on all the layers.

For UE configured with the EN-DC operation, the effective total number of frequencies excluding the frequencies of the PCell, SCells, E-UTRA PCell, and E-UTRA SCells being monitored is $N_{\text{freq, EN-DC}}$, which is defined as:

$$N_{\text{freq, EN-DC}} = N_{\text{freq, EN-DC, NR}} + N_{\text{freq, EN-DC, E-UTRA}} + N_{\text{freq, EN-DC, UTRA}} + M_{\text{EN-DC, GSM}},$$

where

$N_{\text{freq, EN-DC, E-UTRA}}$ is the number of E-UTRA inter-frequency carriers being monitored (FDD and TDD) as configured by E-UTRA PCell or via LPP [22],

$$N_{\text{freq, EN-DC, NR}} \leq N_{\text{freq, EN-DC, NR, inter-RAT}} + N_{\text{freq, EN-DC, NR, inter-freq}}$$

where

$N_{\text{freq, EN-DC, NR, inter-RAT}}$ is the number of NR inter-RAT carriers excluding NR serving carrier(s) being monitored as configured by E-UTRA PCell [15],

$N_{\text{freq, EN-DC, NR, inter-freq}}$ is the number of NR inter-frequency carriers being monitored as configured by PSCell,

$N_{\text{freq, EN-DC, UTRA}}$ is the number of UTRA inter-RAT carriers being monitored as configured by E-UTRA PCell (FDD and TDD).

$M_{\text{EN-DC, GSM}}$ is an integer which is a function of the number of GSM inter-RAT carriers as configured by E-UTRA PCell on which measurements are being performed. $M_{\text{EN-DC, GSM}}$ is equal to 0 if no GSM carrier is being monitored. For a MGRP of 40 ms, $M_{\text{EN-DC, GSM}}$ is equal to 1 if cells on up to 32 GSM carriers are being measured. For a MGRP of 80 ms, $M_{\text{EN-DC, GSM}}$ is equal to $\text{ceil}(N_{\text{carriers, GSM}} / 20)$ where $N_{\text{carriers, GSM}}$ is the number of GSM carriers on which cells are being measured.

9.1.3.1a SA: Monitoring of multiple layers using gaps

The requirements in this clause are applicable for UE configured with SA NR operation mode.

When monitoring of multiple inter-RAT E-UTRAN carriers, inter-frequency NR carriers (with or without CCA) and inter-RAT UTRA FDD carriers using gaps (or without using gaps provided the UE supports such capability or the effective MGRP is applied for per-FR measurement gap capable UE) is configured by PCell, the UE shall be capable of performing one measurement of the configured measurement type (SS-RSRP, SS-RSRQ, SS-SINR, CSI-RSRP, CSI-RSRQ, CSI-SINR, E-UTRAN RSRP, E-UTRAN RSRQ, E-UTRAN RS-SINR measurements, UTRAN FDD CPICH measurement, etc.) of detected cells on all the layers.

For UE configured with the NR SA operation, the effective total number of frequencies, excluding the frequencies of the PCell, PSCell and SCells being monitored, is $N_{\text{freq, SA}}$, which is defined as:

$$N_{\text{freq, SA}} = N_{\text{freq, SA, NR}} + N_{\text{freq, SA, E-UTRA}} + N_{\text{freq, SA, UTRA}}$$

where

$N_{\text{freq, SA, E-UTRA}}$ is the number of E-UTRA inter-RAT carriers being monitored (FDD and TDD) as configured by PCell or via LPP [22],

- $N_{\text{freq, SA, UTRA}}$ is the number of UTRA FDD inter-RAT carriers being monitored as configured by PCell,

$N_{\text{freq, SA, NR}}$ is the number of NR inter-frequency carriers being monitored as configured by PCell.

9.1.3.1b NE-DC: Monitoring of multiple layers using gaps

The requirements in this clause are applicable for UE capable of and configured with the NE-DC operation mode.

When monitoring of multiple inter-frequency E-UTRAN carriers as configured by E-UTRA PSCell, inter-RAT E-UTRAN carriers as configured by PCell, inter-RAT UTRA FDD carriers as configured by PCell, and inter-frequency NR carriers as configured by PCell using gaps (or without using gaps provided the UE supports such capability or the effective MGRP is applied for per-FR measurement gap capable UE) is configured, the UE shall be capable of performing one measurement of the configured measurement type (SS-RSRP, SS-RSRQ, SS-SINR, CSI-RSRP, CSI-RSRQ, CSI-SINR, SFTD, E-UTRAN RSRP, E-UTRAN RSRQ, and E-UTRAN RS-SINR measurements, UTRAN FDD CPICH measurements, etc.) of detected cells on all the layers.

For UE configured with the NE-DC operation, the effective total number of frequencies excluding the frequencies of the PCell, SCells, E-UTRA PSCell, and E-UTRA SCells being monitored is $N_{\text{freq, NE-DC}}$, which is defined as:

$$N_{\text{freq, NE-DC}} = N_{\text{freq, NE-DC, NR}} + N_{\text{freq, NE-DC, E-UTRA}} + N_{\text{freq, NE-DC, UTRA}}$$

where

$N_{\text{freq, NE-DC, NR}}$ is the number of NR inter-frequency carriers being monitored as configured by PCell,

$N_{\text{freq, NE-DC, UTRA}}$ is the number of UTRA FDD inter-RAT carriers being monitored as configured by PCell,

$$N_{\text{freq, NE-DC, E-UTRA}} \leq N_{\text{freq, NE-DC, E-UTRA, inter-RAT}} + N_{\text{freq, NE-DC, E-UTRA, inter-freq}}$$

where

$N_{\text{freq, NE-DC, E-UTRA, inter-RAT}}$ is the number of E-UTRA inter-RAT carriers (FDD and TDD) excluding E-UTRA serving carrier(s) being monitored as configured by PCell or via LPP [22],

$N_{\text{freq, NE-DC, E-UTRA, inter-freq}}$ is the number of E-UTRA inter-frequency carriers (FDD and TDD) being monitored as configured by E-UTRA PCell [15] or via LPP [22].

9.1.3.1c NR-DC: Monitoring of multiple layers using gaps

The requirements in this clause are applicable for UE configured with NR-DC operation mode.

When monitoring of multiple inter-RAT E-UTRAN carriers and inter-frequency NR carriers using gaps (or without using gaps provided the UE supports such capability or the effective MGRP is applied for per-FR measurement gap capable UE) as configured by PCell, inter-RAT UTRA FDD carriers as configured by PCell, and inter-frequency NR carriers as configured by PCell is configured, the UE shall be capable of performing one measurement of the configured measurement type (SS-RSRP, SS-RSRQ, SS-SINR, CSI-RSRP, CSI-RSRQ, CSI-SINR, E-UTRAN RSRP, E-UTRAN RSRQ, E-UTRAN RS-SINR measurements, UTRAN FDD CPICH measurements, etc.) of detected cells on all the layers.

For UE configured with the NR-DC operation, the effective total number of frequencies, excluding the frequencies of the PCell, PCell and SCells being monitored, is $N_{\text{freq, NR-DC}}$, which is defined as:

$$N_{\text{freq, NR-DC}} = N_{\text{freq, NR-DC, NR}} + N_{\text{freq, NR-DC, E-UTRA}} + N_{\text{freq, NR-DC, UTRA}},$$

where

- $N_{\text{freq, NR-DC, E-UTRA}}$ is the number of E-UTRA inter-RAT carriers being monitored (FDD and TDD) as configured by PCell or via LPP [22].
- $N_{\text{freq, NE-DC, UTRA}}$ is the number of UTRA FDD inter-RAT carriers being monitored as configured by PCell,
- $N_{\text{freq, NR-DC, NR}}$ is the number of NR inter-frequency carriers being monitored as configured by PCell and PCell.

9.1.3.2 EN-DC: Maximum allowed layers for multiple monitoring

If a UE is configured with EN-DC operation, the UE shall be capable of monitoring at least:

- Depending on UE capability, 7 NR SSB inter-frequency carriers configured by PCell, and
- Depending on UE capability, 8 NR inter-frequency carriers including SSB and CSI-RS in total configured by PCell, and
- Depending on UE capability, 7 NR SSB inter-RAT carriers excluding NR serving carrier(s) configured by E-UTRA PCell [15], and
- Depending on UE capability, 6 E-UTRA TDD inter-frequency carriers configured by E-UTRA PCell [15], and
- Depending on UE capability, 6 E-UTRA FDD inter-frequency carriers configured by E-UTRA PCell [15], and
- Depending on UE capability, 3 FDD UTRA carriers, and
- Depending on UE capability, 3 TDD UTRA carriers, and
- Depending on UE capability, 32 GSM carriers (one GSM layer corresponds to 32 carriers), and
- Depending on UE capability, 1 E-UTRA FDD inter-frequency carrier for RSTD measurements configured via LPP [22], and

- Depending on UE capability, 1 E-UTRA TDD inter-frequency carrier for RSTD measurements configured via LPP [22].

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least 13 effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD, E-UTRA TDD, UTRA FDD, UTRA TDD and GSM (one GSM layer corresponds to 32 carriers) layers. The UE shall be capable of monitoring a total of at least $7 + N_{\text{CSI}}$ effective NR carrier frequency layers excluding NR serving carrier(s), comprising of any above defined combination of NR inter-RAT carriers excluding NR serving carrier(s) configured by E-UTRA PCell and NR inter-frequency carriers configured by PCell, N_{CSI} equals 1 if UE supports CSI-RS based L3 measurement, and $N_{\text{CSI}} = 0$ otherwise.

The number of SSB frequency layers configured by PCell equals to the total number of MOs with

- *ssb-ConfigMobility* configured, or
- *ssb-ConfigMobility* not configured but *csi-rs-ResourceConfigMobility* configured with *associatedSSB*.

If *ssbFrequency*, *smtc1*, *smtc2* and *ssbSubcarrierSpacing* are same in multiple MOs, the multiple MOs are counted as one SSB frequency layer.

The number of CSI-RS frequency layers equals to the number of MOs with *csi-rs-ResourceConfigMobility* configured assuming single MO is configured per frequency layer.

When the E-UTRA PCell and PCell configures the same NR carrier frequency layer to be monitored by the UE in synchronous intra-band EN-DC, this layer shall be counted only once to the total number of effective carrier frequency layers provided that the SFN-s and slot boundaries are aligned, unless the configured NR carrier frequency layers to be monitored have

- different RSSI measurement resources or
- different *deriveSSB-IndexFromCell* indications or
- different SMTc configurations or
- different *ssb-PositionQCL-Common-r16* indications or cell list of *ssb-PositionQCL* on NR carrier frequency layer with CCA or
- different *rmtc-Config-r16* indication on NR carrier frequency layer with CCA.

Note 1: The E-UTRA-NR dual connectivity capable UE configured with PCell shall fulfil the requirements defined in only one of clause 9.1.3.2 and clause 8.1.2.1.1b.1 of TS 36.133 [15].

9.1.3.2a SA: Maximum allowed layers for multiple monitoring

If a UE is configured with SA NR operation mode, the UE shall be capable of monitoring at least:

- Depending on UE capability, 7 NR SSB inter-frequency carriers configured by PCell, and
- Depending on UE capability, 8 NR inter-frequency carriers including SSB and CSI-RS in total configured by PCell, and
- Depending on UE capability, 7 E-UTRA TDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 7 E-UTRA FDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 3 UTRA FDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 1 E-UTRA FDD inter-RAT carrier for RSTD measurements configured via LPP [22], and
- Depending on UE capability, 1 E-UTRA TDD inter-RAT carrier for RSTD measurements configured via LPP [22].

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least [13] effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD, E-UTRA TDD and UTRA FDD layers.

The number of SSB frequency layers equals to the total number of MOs with

- *ssb-ConfigMobility* configured, or
- *ssb-ConfigMobility* not configured but *csi-rs-ResourceConfigMobility* configured with *associatedSSB*.

If *ssbfrequency*, *smtc1*, *smtc2* and *ssbSubcarrierSpacing* are same in multiple MOs, the multiple MOs are counted as one SSB frequency layer.

The number of CSI-RS frequency layers equals to the number of MOs with *csi-rs-ResourceConfigMobility* configured assuming single MO is configured per frequency layer.

9.1.3.2b NE-DC: Maximum allowed layers for multiple monitoring

If a UE is configured with NE-DC operation mode, the UE shall be capable of monitoring at least:

- Depending on UE capability, 7 NR SSB inter-frequency carriers configured by PCell, and
- Depending on UE capability, 8 NR inter-frequency carriers including SSB and CSI-RS in total configured by PCell, and
- Depending on UE capability, 6 E-UTRA TDD inter-RAT carriers excluding E-UTRA serving carriers configured by PCell, and
- Depending on UE capability, 6 E-UTRA FDD inter-RAT carriers excluding E-UTRA serving carriers configured by PCell, and
- Depending on UE capability, 6 E-UTRA TDD inter-frequency carriers configured by E-UTRA PSCell [15], and
- Depending on UE capability, 6 E-UTRA FDD inter-frequency carriers configured by E-UTRA PSCell [15], and
- Depending on UE capability, 3 UTRA FDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 1 E-UTRA FDD inter-frequency carrier for RSTD measurements configured via LPP [22], and
- Depending on UE capability, 1 E-UTRA TDD inter-frequency carrier for RSTD measurements configured via LPP [22].

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least 13 effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD, E-UTRA TDD and UTRA FDD layers. The UE shall be capable of monitoring a total of at least 6 effective E-UTRA carrier frequency layers, excluding E-UTRA serving carrier(s), comprising of any above defined combination of E-UTRA inter-RAT carriers excluding E-UTRA serving carrier(s) configured by PCell and E-UTRA inter-frequency carriers configured by E-UTRA PSCell.

The number of SSB frequency layers configured by PCell equals to the total number of MOs with

- *ssb-ConfigMobility* configured, or
- *ssb-ConfigMobility* not configured but *csi-rs-ResourceConfigMobility* configured with *associatedSSB*.

If *ssbfrequency*, *smtc1*, *smtc2* and *ssbSubcarrierSpacing* are same in multiple MOs, the multiple MOs are counted as one SSB frequency layer.

The number of CSI-RS frequency layers equals to the number of MOs with *csi-rs-ResourceConfigMobility* configured assuming single MO is configured per frequency layer.

9.1.3.2c NR-DC: Maximum allowed layers for multiple monitoring

If a UE is configured with NR-DC operation, the UE shall be capable of monitoring at least:

- Depending on UE capability, 7 NR SSB inter-frequency carriers configured by PCell, and
- Depending on UE capability, 8 NR inter-frequency carriers including SSB and CSI-RS in total configured by PCell, and

- Depending on UE capability, 7 NR SSB inter-frequency carriers configured by PCell, and
- Depending on UE capability, 8 NR inter-frequency carriers including SSB and CSI-RS in total configured by PCell, and
- Depending on UE capability, 7 E-UTRA TDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 7 E-UTRA FDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 3 UTRA FDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 1 E-UTRA FDD inter-RAT carrier for RSTD measurements configured via LPP [22], and
- Depending on UE capability, 1 E-UTRA TDD inter-RAT carrier for RSTD measurements configured via LPP [22].

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least 13 effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD, E-UTRA TDD and UTRA FDD layers. The UE shall be capable of monitoring a total of at least $7 + N_{\text{CSI}}$ effective NR carrier frequency layers excluding NR serving carrier(s), which are configured by PCell and PSCell, N_{CSI} equals 1 if UE supports CSI-RS based L3 measurement, and $N_{\text{CSI}} = 0$ otherwise.

The number of SSB frequency layers equals to the total number of MOs with

- *ssb-ConfigMobility* configured, or
- *ssb-ConfigMobility* not configured but *csi-rs-ResourceConfigMobility* configured with *associatedSSB*.

If *ssbfrequency*, *smtc1*, *smtc2* and *ssbSubcarrierSpacing* are same in multiple MOs, the multiple MOs are counted as one SSB frequency layer.

The number of CSI-RS frequency layers equals to the number of MOs with *csi-rs-ResourceConfigMobility* configured assuming single MO is configured per frequency layer.

When PCell and PSCell configures the same NR carrier frequency layer to be monitored by the UE in NR-DC, this layer shall be counted only once to the total number of effective carrier frequency layers provided that the SFN-s and slot boundaries are aligned, unless the configured NR carrier frequency layers to be monitored have

- different RSSI measurement resources or
- different *deriveSSB-IndexFromCell* indications or
- different SMTC configurations or
- different *ssb-PositionQCL-Common-r16* indications or cell list of *ssb-PositionQCL* on NR carrier frequency layer with CCA or
- different *rmtc-Config-r16* indication on NR carrier frequency layer with CCA.

9.1A.3.2 Void

9.1.3A UE Measurement capability under operation mode with CCA

9.1.3A.1 EN-DC: Monitoring of multiple layers using gaps under CCA

The requirements in clause 9.1.3.1 are also applicable for the UE capable of and configured with the EN-DC operation mode with CCA on PSCC.

9.1.3A.1a SA: Monitoring of multiple layers using gaps under CCA

The requirements in clause 9.1.3.1a are also applicable for UE configured with SA NR operation mode with CCA on PCC.

9.1.3A.2 EN-DC: Maximum allowed layers for multiple monitoring under CCA

If a UE is configured with EN-DC operation when CCA is used on PSCell, the UE shall be capable of monitoring at least:

- Depending on UE capability, 7 NR inter-frequency carriers configured by PSCell, and
- Depending on UE capability, 7 NR inter-RAT carriers excluding NR serving carrier(s) configured by E-UTRA PCell [15], and
- Depending on UE capability, 6 E-UTRA TDD inter-frequency carriers configured by E-UTRA PCell [15], and
- Depending on UE capability, 6 E-UTRA FDD inter-frequency carriers configured by E-UTRA PCell [15], and
- Depending on UE capability, 3 FDD UTRA carriers, and
- Depending on UE capability, 3 TDD UTRA carriers, and
- Depending on UE capability, 32 GSM carriers (one GSM layer corresponds to 32 carriers), and

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least 13 effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD, E-UTRA TDD, UTRA FDD, UTRA TDD and GSM (one GSM layer corresponds to 32 carriers) layers. The UE shall be capable of monitoring a total of at least 7 effective NR carrier frequency layers excluding NR serving carrier(s), comprising of any above defined combination of NR inter-RAT carriers excluding NR serving carrier(s) configured by E-UTRA PCell and NR inter-frequency carriers configured by PSCell.

When the E-UTRA PCell and PSCell configures the same NR carrier frequency layer to be monitored by the UE in synchronous intra-band EN-DC, this layer shall be counted only once to the total number of effective carrier frequency layers provided that the SFN-s and slot boundaries are aligned, unless the configured NR carrier frequency layers to be monitored have

- different RSSI measurement resources or
- different *deriveSSB-IndexFromCell* indications or
- different SMTC configurations or
- different *ssb-PositionQCL-Common-r16* indications or cell list of *ssb-PositionQCL* on NR carrier frequency layer with CCA or
- different *rmtc-Config-r16* indication on NR carrier frequency layer with CCA.

9.1.3A.2a SA: Maximum allowed layers for multiple monitoring under CCA

If a UE is configured with SA NR operation mode when CCA is used on PCell or SCell only, the UE shall be capable of monitoring at least:

- Depending on UE capability, 7 NR inter-frequency carriers configured by PCell, and
- Depending on UE capability, 7 E-UTRA TDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 7 E-UTRA FDD inter-RAT carriers configured by PCell, and

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least [13] effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD and E-UTRA TDD layers.

9.1.3C UE Measurement capability under operation mode with satellite access

Editor's note: Applicability of frequency range, CA, DA, duplex mode, inter-RAT measurement, etc is subject to updates/changes based on the scope of the corresponding WID.

Editor's note: Terminology will be further clarified and selected between, e.g. NTN and satellite access, based on further agreements.

9.1.3C.1a SA: Monitoring of multiple layers using gaps under satellite access

The requirements in this clause are applicable for UE configured with only PCell, which is served by SAN.

When monitoring of multiple SAN carriers and TN carriers using gaps (or without using gaps provided the UE supports such capability) is configured by PCell, the UE shall be capable of performing one measurement of the configured measurement type (SS-RSRP, SS-RSRQ, SS-SINR, CSI-RSRP, CSI-RSRQ, CSI-SINR) of detected cells on all the layers.

Note: for a cell served by SAN, the UE could only be configured to measure SS-RSRP, SS-RSRQ, SS-SINR.

For the UE configured with NR SA operation mode with only PCell served by SAN, the effective total number of frequencies, excluding the frequencies of the serving cell being monitored, is $N_{\text{freq, SA}}$, which is defined as:

$$N_{\text{freq, SA}} = N_{\text{freq, SA, SAN}} + N_{\text{freq, SA, TN}},$$

where

- $N_{\text{freq, SA, SAN}}$ is the number of SAN carriers being monitored as configured by the serving cell served by SAN,
- $N_{\text{freq, SA, TN}}$ is the number of TN carriers being monitored as configured by the serving cell served by SAN.

9.1.3C.2a SA: Maximum allowed layers for multiple monitoring for SAN

If a UE is configured with NR SA operation mode with SAN serving cell, the UE shall be capable of monitoring at least:

- Depending on UE capability, 3 NR SAN carriers including serving carrier, and
- Depending on UE capability, 7 NR SAN and TN carriers including serving carrier,
- The total number of NR SAN and TN carriers does not apply to VSAT UE.

FFS: the number of effective frequency layers UE shall be capable to monitor.

9.1.4 Capabilities for Support of Event Triggering and Reporting Criteria

9.1.4.1 Introduction

This clause contains requirements on UE capabilities for support of event triggering and reporting criteria. As long as the measurement configuration does not exceed the requirements stated in clause 9.1.4.2, the UE shall meet all other performance requirements defined in clause 9 and clause 10. The requirements in this clause also apply for a UE in EN-DC with PSCell on a carrier frequency with CCA or SA NR with PCell on a carrier frequency with CCA.

The UE can be requested to make measurements under different measurement identities defined in TS 38.331 [2]. Each measurement identity corresponds to either event-based reporting, periodic reporting, or no reporting. In case of event-based reporting, each measurement identity is associated with an event triggering criterion. In case of periodic reporting, a measurement identity is associated with one periodic reporting criterion. In case of no reporting, a measurement identity is associated with one no reporting criterion.

The purpose of this clause is to set some limits on the number of different event triggering, periodic, and no reporting criteria the UE may be requested to track in parallel.

9.1.4.2 Requirements

In this clause a reporting criterion corresponds to either one event (in the case of event-based reporting), or one periodic reporting criterion (in case of periodic reporting), or one no reporting criterion (in case of no reporting). For event-based reporting, each instance of event, with the same or different event identities, is counted as separate reporting criterion in Table 9.1.4.2-1.

The UE shall be able to support in parallel per category up to E_{cat} reporting criteria according to Table 9.1.4.2-1. For the measurement categories belonging to intra-frequency, inter-frequency, and inter-RAT measurements (i.e. without counting other categories that the UE shall always support in parallel), the UE need not support more than the total number of reporting criteria as follows:

- For UE configured with EN-DC: $E_{cat,EN-DC,NR} + E_{cat,EN-DC,E-UTRA}$, where

$E_{cat,EN-DC,NR} = 10 + 9 \times n$ is the total number of NR reporting criteria configured by PCell (NR intra- and inter-frequency reporting criteria) and by E-UTRA PCell on NR serving frequencies (NR intra-frequency reporting criteria) applicable for UE configured with EN-DC according to Table 9.1.4.2-1, and n is the number of configured NR serving frequencies, including PCell and SCells carrier frequencies,

$E_{cat,EN-DC,E-UTRA}$ is the total number of reporting criteria configured by E-UTRA PCell except PCell and SCells carrier frequencies, as specified in TS 36.133 [15] for UE configured with EN-DC.

- For UE configured with NE-DC: $E_{cat,NE-DC,NR} + E_{cat,NE-DC,E-UTRA}$, where

$E_{cat,NE-DC,NR} = 10 + 9 \times n$ is the total number of NR reporting criteria according to Table 9.1.4.2-1, and n is the number of configured NR serving frequencies, including PCell and SCells carrier frequencies,

$E_{cat,NE-DC,E-UTRA} = E_{cat,NE-DC,E-UTRA,inter-RAT} + E_{cat,NE-DC,E-UTRA,intra-RAT}$, where

$E_{cat,NE-DC,E-UTRA,inter-RAT}$ is the total number of inter-RAT E-UTRA reporting criteria configured by PCell except E-UTRA PCell and E-UTRA SCells carrier frequencies, according to Table 9.1.4.2-1,

$E_{cat,NE-DC,E-UTRA,intra-RAT}$ is the total number of E-UTRA reporting criteria including E-UTRA PCell and E-UTRA SCells carrier frequencies as specified in TS 36.133 [15] for UE configured with NE-DC.

- For UE configured with SA operation mode: $E_{cat,SA,NR} + E_{cat,SA,E-UTRA}$, where

$E_{cat,SA,NR} = 10 + 9 \times n$ is the total number of NR reporting criteria according to Table 9.1.4.2-1, and n is the number of configured NR serving frequencies, including PCell, and SCells carrier frequencies,

$E_{cat,SA,E-UTRA}$ is the total number of inter-RAT E-UTRA reporting criteria according to Table 9.1.4.2-1.

- For UE configured with NR-DC: $E_{cat,NR-DC,NR} + E_{cat,NR-DC,E-UTRA}$, where

$E_{cat,NR-DC,NR} = 10 + 9 \times n$ is the total number of NR reporting criteria according to Table 9.1.4.2-1, and n is the number of configured NR serving frequencies, including PCell, PCell and SCells carrier frequencies,

$E_{cat,NR-DC,E-UTRA}$ is the total number of inter-RAT E-UTRA reporting criteria according to Table 9.1.4.2-1.

Table 9.1.4.2-1: Requirements for reporting criteria per measurement category

Measurement category	E_{cat}	Note
Intra-frequency ^{Note 1,2,3,4,5}	9	Events for any one or a combination of intra-frequency SS-RSRP, SS-RSRQ, SS-SINR, CSI-RSRP, CSI-RSRQ, and CSI-SINR for NG-RAN intra-frequency cells
Inter-frequency ^{Note 2,3,4,5}	10	Events for any one or a combination of inter-frequency SS-RSRP, SS-RSRQ, SS-SINR, CSI-RSRP, CSI-RSRQ, and CSI-SINR for NG-RAN inter-frequency cells
Inter-RAT (E-UTRA FDD, E-UTRA TDD) ^{Note 2,4,5}	10	Only applicable for UE with this (inter-RAT) capability. These reporting criteria apply for any E-UTRA carrier frequencies other than the carrier frequency of the E-UTRA PCell or E-UTRA SCell.

Inter-RAT (E-UTRA FDD, E-UTRA TDD) RSTD ^{Note 2,4,5}	1	Inter-RAT RSTD measurement reporting for UE supporting OTDOA; 1 report capable of minimum 16 inter-RAT cell measurements. Only applicable for UE with this (inter-RAT RSTD via LPP [22]) capability. These reporting criteria apply for any E-UTRA carrier frequencies other than the carrier frequency of the E-UTRA PSCell or E-UTRA SCell.
Inter-RAT (E-UTRA FDD, E-UTRA TDD) RSRP and RSRQ measurements for E-CID ^{Note 2,4,5}	1	Inter-RAT RSRP and RSRQ measurements for E-CID reported to E-SMLC via LPP [22]. One report capable of at least in total 10 inter-RAT RSRP and RSRQ measurements. Applicable to UE capable of reporting inter-RAT RSRP and RSRQ to E-SMLC via LPP. These reporting criteria apply for any E-UTRA carrier frequencies other than the carrier frequency of the E-UTRA PSCell or E-UTRA SCell.
Intra-frequency RSSI and channel occupancy measurements with CCA ^{Note 1,2,3}	1	One report capable of one RSSI and one channel occupancy measurements over a channel [TS 37.213] with CCA. Applicable for UE capable of performing and reporting RSSI and channel occupancy on carrier frequencies under CCA.
Inter-frequency RSSI and channel occupancy measurements with CCA ^{Note 2,3}	1	One report capable of one RSSI and one channel occupancy measurements over a channel [TS 37.213] with CCA. Applicable for UE capable of performing and reporting RSSI and channel occupancy on carrier frequencies under CCA.
Intra-frequency SSB-based measurements for NR E-CID ^{Note 1,2,3,4,5}	1	Intra-frequency SS-RSRP and SS-RSRQ measurements for NR E-CID reported to LMF via LPP [34]. One report capable of at least in total 9 intra-frequency SS-RSRP and SS-RSRQ measurements. Applicable to UE capable of reporting at least one of SS-RSRP and SS-RSRQ to LMF via LPP.
Intra-frequency CSI-RS based measurements for NR E-CID ^{Note 1,2,3,4,5}	1	Intra-frequency CSI-RSRP and CSI-RSRQ measurements for NR E-CID reported to LMF via LPP [22]. One report capable of at least in total 9 intra-frequency CSI-RSRP and/or CSI-RSRQ measurements. Applicable to UE capable of reporting any of CSI-RSRP and CSI-RSRQ to LMF via LPP, as indicated in <i>nr-ECID-MeasSupported-r16</i> .
Inter-frequency SSB-based measurements for NR E-CID ^{Note 2,3,4,5}	1	Inter-frequency SS-RSRP and SS-RSRQ measurements for NR E-CID reported to LMF via LPP [34]. One report capable of at least in total 10 inter-frequency SS-RSRP and SS-RSRQ measurements. Applicable to UE capable of reporting at least one of SS-RSRP and SS-RSRQ to LMF via LPP.
Inter-frequency CSI-RS based measurements for NR E-CID ^{Note 2,3,4,5}	1	Inter-frequency CSI-RSRP and CSI-RSRQ measurements for NR E-CID reported to LMF via LPP [22]. One report capable of at least in total 10 inter-frequency CSI-RSRP and CSI-RSRQ measurements. Applicable to UE capable of reporting any of CSI-RSRP and CSI-RSRQ to LMF via LPP, as indicated in <i>nr-ECID-MeasSupported-r16</i> .

DL RSTD Note 2,4,5	1	DL RSTD measurement reporting; 1 report capable of multiple (within the UE PRS measurement capability, <i>nr-DL-TDOA-MeasCapability</i> , indicated via LPP [34]) DL RSTD measurements and if supported also multiple corresponding DL PRS-RSRP measurements configured for DL-TDOA. Only applicable for UE capable of reporting measurements for DL-TDOA to LMF via LPP [34].
UE Rx-Tx Note 2,4,5	1	UE Rx-Tx measurement reporting; 1 report capable of multiple (within the UE PRS measurement capability, <i>nr-DL-PRS-MeasCapability</i> , indicated via LPP [34] for multi-RTT) UE Rx-Tx measurements and if supported also multiple corresponding DL PRS-RSRP measurements configured for multi-RTT. Only applicable for UE capable of reporting measurements for multi-RTT to LMF via LPP [34].
DL PRS-RSRP Note 2,4,5	1	DL PRS-RSRP measurement reporting; 1 report capable of multiple (within the UE PRS measurement capability, <i>nr-DL-PRS-MeasCapability</i> , indicated via LPP [34] for AoD) DL PRS-RSRP measurements configured for DL-AoD. Only applicable for UE capable of reporting measurements for DL-AoD to LMF via LPP [34].
DL PRS-RSRPP Note 2,4,5	1	DL PRS-RSRPP measurement reporting; 1 report capable of multiple (within the UE PRS measurement capability, <i>nr-DL-PRS-MeasCapability</i> , indicated via LPP [34] for AoD) DL PRS-RSRPP measurements configured for DL-AoD. Only applicable for UE capable of reporting measurements for DL-AoD to LMF via LPP [34].
SRS-RSRP Note 2,3,4,5	1	SRS-RSRP measurement reporting for CLI; 1 report capable of up to 32 SRS resources measurements. Only applicable for UE supporting <i>cli-SRS-RSRP-Meas-r16</i> .
CLI-RSSI Note 2,3,4,5	1	CLI-RSSI measurement reporting for CLI; 1 report capable of up to 64 CLI-RSSI resources measurements. Only applicable for UE supporting <i>cli-RSSI-Meas-r16</i> .
NOTE 1: When the UE is configured with PSCell and SCell carrier frequencies, E_{cat} for Intra-frequency is applied per corresponding NR serving frequency. NOTE 2: Applicable for UE configured with SA NR operation mode. NOTE 3: Applicable for UE configured with EN-DC operation mode. NOTE 4: Applicable for UE configured with NE-DC operation mode. NOTE 5: Applicable for UE configured with NR-DC operation mode.		

9.1.5 Carrier-specific scaling factor

This clause specifies the derivation of carrier-specific scaling factor (CSSF) values, which scales the measurement delay requirements given in clause 9.2, 9.2A, 9.3, 9.3A, 9.4, and NR PRS-based positioning measurements in clause 9.9 and CSI-RS based L3 measurement in clause 9.10 when UE is configured to monitor multiple measurement objects. The CSSF values are categorized into $CSSF_{outside_gap,i}$, $CSSF_{within_gap,i}$ and $CSSF_{within_ncsg,i}$, for the measurements conducted outside measurement gaps, within measurement gaps and within NCSG, respectively.

If concurrent measurement gaps are configured by the network, subject to UE capability, [the term of the union of concurrent measurement gaps in the following clauses refer to non-dropped measurement gap occasions after accounting for measurement gap collisions as specified in clause 9.1.8.3 from all the configured measurement gap patterns. The term of the associated measurement gap in concurrent measurement gaps in the following clauses refer to non-dropped measurement gap occasions associated by measurement object i after accounting for measurement gap collisions as specified in clause 9.1.8.3].

9.1.5.1 Monitoring of multiple layers outside gaps

For a UE supporting concurrent gaps and when concurrent gaps are configured the carrier-specific scaling factor $CSSF_{\text{outside_gap},i}$ for measurement object i derived in this chapter is applied to following measurement types :

- SSB-based intra-frequency measurement with no measurement gap in clause 9.2.5 and 9.2A.5, when none of the SMTC occasions of this intra-frequency measurement object are overlapped by the union of concurrent measurement gaps.
- SSB-based intra-frequency measurement with no measurement gap in clause 9.2.5 and 9.2A.5, when part of the SMTC occasions of this intra-frequency measurement object are overlapped by the union of concurrent measurement gaps.
- CSI-RS based intra-frequency measurement in clause 9.10.2, when none of CSI-RS resources for L3 measurement of this intra-frequency measurement object are overlapped the union of concurrent measurement gaps.
- CSI-RS based intra-frequency measurement in clause 9.10.2, when all CSI-RS resources for L3 measurement of this intra-frequency measurement object are partially overlapped the union of concurrent measurement gaps.
- SSB-based inter-frequency measurement with no measurement gap in clause 9.3.9, when none of the SMTC occasions of this inter-frequency measurement object are overlapped or the union of concurrent measurement gaps, if UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network.
- SSB-based inter-frequency measurement with no measurement gap in clause 9.3.9, when part of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap or the union of concurrent measurement gaps, if UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network.

Otherwise, the carrier-specific scaling factor $CSSF_{\text{outside_gap},i}$ for measurement object i derived in this chapter is applied to following measurement types:

- SSB-based intra-frequency measurement with no measurement gap in clause 9.2.5 and 9.2A.5, when none of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap.
- SSB-based intra-frequency measurement with no measurement gap in clause 9.2.5 and 9.2A.5, when part of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap.
- CSI-RS based intra-frequency measurement in clause 9.10.2, when none of CSI-RS resources for L3 measurement of this intra-frequency measurement object are overlapped by the measurement gap.
- CSI-RS based intra-frequency measurement in clause 9.10.2, when all CSI-RS resources for L3 measurement of this intra-frequency measurement object are partially overlapped by the measurement gap.
- SSB-based inter-frequency measurement with no measurement gap in clause 9.3.9, when none of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap.
- SSB-based inter-frequency measurement with no measurement gap in clause 9.3.9, when part of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap.
- For a UE in E-UTRA-NR dual connectivity operation, NR SSB-based inter-RAT measurement object configured by the E-UTRAN PCell on an NR serving carrier
 - the SSB is completely contained in the active BWP of the UE, and
 - none or part of the SMTC occasions of this inter-RAT measurement object are overlapped by the measurement gap;
- Intra-frequency RSSI and channel occupancy measurement with no measurement gap on a carrier subject to CCA when SMTC and RMTC are overlapping and RMTCs are not fully overlapped with measurement gap.

The UE is expected to conduct the measurement of this measurement object i only outside the measurement gap(s).

For a UE in E-UTRA-NR dual connectivity operation, if a measurement object configured by PSCell and an NR inter-RAT measurement object configured by E-UTRAN PCell are on the same serving carrier, they shall be counted as one intra-frequency measurement object, provided that they meet the measurement object merging conditions in clause 9.1.3.2.

The number of frequency layers for SSB measurements shall include the total number of MOs with

- *ssb-ConfigMobility* configured, or
- *ssb-ConfigMobility* not configured but *csi-rs-ResourceConfigMobility* configured with *associatedSSB*.

If *ssbfrequency*, *smtc1*, *smtc2* and *ssbSubcarrierSpacing* are same in multiple MOs, the multiple MOs are counted as one SSB frequency layer.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, $CSSF_{\text{outside_gap},i}$ and requirements derived from $CSSF_{\text{outside_gap},i}$ are not specified.

The UE cell identification and measurement periods derived based on $CSSF_{\text{outside_gap},i}$ in clauses 9.2.5.1, 9.2.5.2 and 9.10.2 may be extended for measurement objects of which the cell identification and measurement periods are overlapped with $T_{\text{measure_SFTD1}}$ specified in clause 9.3.8 when no measurement gaps are provided.

The requirements in this clause apply provided that

- The SMTC on all CCs and inter-frequency layers without measurement gap in FR2 have the same offset, and one of following conditions is met
 - If *smtc2* is configured on any FR2 CC,
 - All CCs have the same configuration for *smtc1*, and
 - All CCs configured with *smtc2* have the same configuration for *smtc2*
 - If *smtc2* is not configured on any FR2 CC,
 - The total number of different SMTC periodicities on all serving CCs and inter-frequency layers without measurement gap does not exceed 4
- The starting point of the first 5ms window for CSI-RS measurement as defined in clause 9.10.1 on all CCs in FR2 is same and one of following conditions is met
 - If any CSI-RS resource is configured in the second 5ms window for CSI-RS measurement as defined in clause 9.10.1 on any FR2 CC,
 - All CCs with CSI-RS resources only in the first 5ms window have the same CSI-RS resource periodicity, and
 - All CCs with CSI-RS resources both in the first and the second 5ms window have the same CSI-RS resource periodicity
 - If no CSI-RS resource is configured in the second 5ms window for CSI-RS measurement as defined in clause 9.10.1 on any FR2 CC,
 - The total number of different CSI-RS resources periodicities on all serving CCs does not exceed 3Note: Longer delays for cell identification and measurement periods derived based on $CSSF_{\text{outside_gap},i}$ in clauses 9.2.5.1, 9.2.5.2, can be expected, if the UE is configured with more than 4 different SMTC periodicities on FR2 serving carriers. The longer delay applies for the FR2 intra-frequency measurement objects with the longest SMTC periodicity/periodicities.

9.1.5.1.1 EN-DC mode: carrier-specific scaling factor for SSB-based, CSI-RS based L3 measurements and RSSI and channel occupancy measurements performed outside gaps

For UE configured with the E-UTRA-NR dual connectivity operation, the carrier-specific scaling factor $CSSF_{outside_gap,i}$ for intra-frequency SSB-based measurements, inter-frequency SSB-based measurements performed outside measurements gaps, intra-frequency CSI-RS L3 measurement and RSSI/channel occupancy measurement with no measurement gap on a carrier subject to CCA when SMTC and RMTC are overlapping will be as specified in Table 9.1.5.1.1-1.

Table 9.1.5.1.1-1: $CSSF_{outside_gap,i}$ scaling factor for EN-DC mode

Scenario	$CSSF_{outside_gap,i}$ for FR1 PSCC	$CSSF_{outside_gap,i}$ for FR1 SCC	$CSSF_{outside_gap,i}$ for FR2 PSCC	$CSSF_{outside_gap,i}$ for FR2 SCC where neighbour cell measurement is required ^{Note 2}	$CSSF_{outside_gap,i}$ for FR2 SCC where neighbour cell measurement is not required	$CSSF_{outside_gap,i}$ for inter-frequency MO with no measurement gap
EN-DC with FR1 only CA	$1+N_{PSCC_CSIRS}+N_{PSCC_CCA_RSSI/CO}$	$N_{SCC_SSB}+Y+2X$ $N_{SCC_CSIRS}+$ $N_{SCC_CCA_RSSI/CO}$	N/A	N/A	N/A	$N_{SCC_SSB}+Y+2X$ $N_{SCC_CSIRS}+$ $N_{SCC_CCA_RSSI/CO}$
EN-DC with FR2 only intra band CA	N/A	N/A	$1+N_{PSCC_CSIRS}$	N/A	$N_{SCC_SSB}+Y+2X$ N_{SCC_CSIRS}	$N_{SCC_SSB}+Y+2X$ N_{SCC_CSIRS}
EN-DC with FR2 only inter band CA	N/A	N/A	$1+N_{PSCC_CSIRS}$	$2x(1+N_{SCC_CSIRS_FR2_NCM})$ ^{Note 3,5}	$2x(N_{SCC_SSB}+Y+2X N_{SCC_CSIRS}-1-N_{SCC_CSIRS_FR2_NCM})$	$2x(N_{SCC_SSB}+Y+2X N_{SCC_CSIRS}-1-N_{SCC_CSIRS_FR2_NCM})$
EN-DC with FR1 +FR2 CA (FR1 PSCell) ^{Note 1}	$1+N_{PSCC_CSIRS}$	$2x(N_{SCC_SSB}+Y+2X N_{SCC_CSIRS}-1-N_{SCC_CSIRS_FR2_NCM})$	N/A	$2x(1+N_{SCC_CSIRS_FR2_NCM})$ ^{Note 3}	$2x(N_{SCC_SSB}+Y+2X N_{SCC_CSIRS}-1-N_{SCC_CSIRS_FR2_NCM})$	$2x(N_{SCC_SSB}+Y+2X N_{SCC_CSIRS}-1-N_{SCC_CSIRS_FR2_NCM})$
EN-DC with FR1 +FR2 CA (FR2 PSCell) ^{Note 1}	N/A	$N_{SCC_SSB}+Y+2X$ N_{SCC_CSIRS}	$1+N_{PSCC_CSIRS}$	N/A	$N_{SCC_SSB}+Y+2X$ N_{SCC_CSIRS}	$N_{SCC_SSB}+Y+2X$ N_{SCC_CSIRS}
Note 1: Only one NR FR1 operating band and one NR FR2 operating band are included for FR1+FR2 inter-band EN-DC. Note 2: Selection of FR2 SCC where neighbour cell measurement is required follows clause 9.2.3.2. Note 3: $CSSF_{outside_gap,i}=1$ if only one SCell is configured and no inter-frequency MO without gap and only SSB based L3 measurement is configured on SCC; $CSSF_{outside_gap,i}=2$ if only one SCell is configured and no inter-frequency MO without gap and either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement is configured on SCC. Note 4: Y is the number of configured inter-frequency MOs without MG that are being measured outside of MG; otherwise, it is 0. Note 5: Only two NR FR2 operating band are included for EN-DC with FR2 only inter-band CA Note 6: $N_{PSCC_CSIRS}=1$ if PSCC is with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured; otherwise, $N_{PSCC_CSIRS}=0$. Note 7: N_{SCC_CSIRS}=Number of configured SCell(s) with either both SSB and CSI-RS based L3 measurement configured or only CSI-RS based L3 measurement configured Note 8: $N_{SCC_CSIRS_FR2_NCM}=1$ if FR2 SCC, where neighbour cell measurement is required, is with either both SSB and CSI-RS configured or only CSI-RS measurement configured; otherwise, $N_{SCC_CSIRS_FR2_NCM}=0$. Note 9: N_{SCC_SSB}=Number of configured SCell(s) with only SSB based L3 measurement configured, which is measured without MG. Note 10: $N_{PSCC_CCA_RSSI/CO}=1$ if PSCC is configured with RSSI/CO measurements without MG when RMTC and SMTC are overlapping; $N_{SCC_CCA_RSSI/CO}$ = Number of MOs for SCell(s) configured with RSSI/CO measurements without MG when RMTC and SMTC are overlapping. Note 11: If a measurement object configured by PSCell and an NR inter-RAT measurement object configured by E-UTRAN PCell are on the same serving carrier, they shall be counted as one intra-frequency measurement object, provided that they meet the measurement object merging conditions [in clause 9.1.3.2], otherwise they are counted separately as two measurement objects.						

9.1.5.1.2 SA mode: carrier-specific scaling factor for SSB-based, CSI-RS based L3 measurements and RSSI and channel occupancy measurements performed outside gaps

For UE in SA operation mode, the carrier-specific scaling factor $CSSF_{\text{outside_gap},i}$ for intra-frequency SSB-based measurements, inter-frequency SSB-based measurements performed outside measurements gaps, intra-frequency CSI-RS L3 measurement and RSSI/channel occupancy measurement with no measurement gap on a carrier subject to CCA when SMTC and RMTC are overlapping will be as specified in Table 9.1.5.1.2-1, which shall also be applied for a UE configured with NE-DC operation.

Table 9.1.5.1.2-1: $CSSF_{\text{outside_gap},i}$ scaling factor for SA mode

Scenario	$CSSF_{\text{outside_gap},i}$ for FR1 PCC	$CSSF_{\text{outside_gap},i}$ for FR1 SCC	$CSSF_{\text{outside_gap},i}$ for FR2 PCC	$CSSF_{\text{outside_gap},i}$ for FR2 SCC where neighbour cell measurement is required	$CSSF_{\text{outside_gap},i}$ for FR2 SCC where neighbour cell measurement is not required	$CSSF_{\text{outside_gap},i}$ for inter-frequency MO with no measurement gap
FR1 only CA	$1+N_{\text{PCC_CSIRS}} + N_{\text{PCC_CCA_RSSI/CO}}$	$N_{\text{SCC_SSB}} + Y + 2X$ $N_{\text{SCC_CSIRS}} + N_{\text{SCC_CCA_RSSI/CO}}$	N/A	N/A	N/A	$N_{\text{SCC_SSB}} + Y + 2X$ $N_{\text{SCC_CSIRS}} + N_{\text{SCC_CCA_RSSI/CO}}$
FR2 only intra band CA	N/A	N/A	$1+N_{\text{PCC_CSIRS}}$	N/A	$N_{\text{SCC_SSB}} + Y + 2X$ $N_{\text{SCC_CSIRS}}$	$N_{\text{SCC_SSB}} + Y + 2X$ $N_{\text{SCC_CSIRS}}$
FR2 only inter band CA	N/A	N/A	$1+N_{\text{PCC_CSIRS}}$	$2 \times (1 + N_{\text{SCC_CSIRS_FR2_NCM}})$ Note 3,5	$2 \times (N_{\text{SCC_SSB}} + Y + 2X + N_{\text{SCC_CSIRS}} - 1 - N_{\text{SCC_CSIRS_FR2_NCM}})$	$2 \times (N_{\text{SCC_SSB}} + Y + 2X + N_{\text{SCC_CSIRS}} - 1 - N_{\text{SCC_CSIRS_FR2_NCM}})$
FR1 +FR2 CA (FR1 PCell) Note 1	$1+N_{\text{PCC_CSIRS}}$	$2 \times (N_{\text{SCC_SSB}} + Y + 2X + N_{\text{SCC_CSIRS}} - 1 - N_{\text{SCC_CSIRS_FR2_NCM}})$	N/A	$2 \times (1 + N_{\text{SCC_CSIRS_FR2_NCM}})$ Note 3,5	$2 \times (N_{\text{SCC_SSB}} + Y + 2X + N_{\text{SCC_CSIRS}} - 1 - N_{\text{SCC_CSIRS_FR2_NCM}})$	$2 \times (N_{\text{SCC_SSB}} + Y + 2X + N_{\text{SCC_CSIRS}} - 1 - N_{\text{SCC_CSIRS_FR2_NCM}})$
FR1 +FR2 CA (FR2 PCell) Note 1	N/A	$N_{\text{SCC_SSB}} + Y + 2X$ $N_{\text{SCC_CSIRS}}$	$1+N_{\text{PCC_CSIRS}}$	N/A	$N_{\text{SCC_SSB}} + Y + 2X$ $N_{\text{SCC_CSIRS}}$	$N_{\text{SCC_SSB}} + Y + 2X$ $N_{\text{SCC_CSIRS}}$
Note 1: Only one FR1 operating band and one FR2 operating band are included for FR1+FR2 inter-band CA. Note 2: Selection of FR2 SCC where neighbour cell measurement is required follows clause 9.2.3.2. Note 3: $CSSF_{\text{outside_gap},i} = 1$ if only one SCell is configured and no inter-frequency MO without gap and only SSB based L3 measurement is configured on SCC; $CSSF_{\text{outside_gap},i} = 2$ if only one SCell is configured and no inter-frequency MO without gap and either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement is configured on SCC. Note 4: Y is the number of configured inter-frequency MOs without MG that are being measured outside of MG; otherwise, it is 0. Note 5: Only two NR FR2 operating bands are included for FR2 inter-band CA. Note 6: $N_{\text{PCC_CSIRS}} = 1$ if PCC is with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured; otherwise, $N_{\text{PCC_CSIRS}} = 0$. Note 7: $N_{\text{SCC_CSIRS}} = \text{Number of configured SCell(s) with either both SSB and CSI-RS based L3 measurement configured or only CSI-RS based L3 measurement configured}$ Note 8: $N_{\text{SCC_CSIRS_FR2_NCM}} = 1$ if FR2 SCC, where neighbour cell measurement is required, is with either both SSB and CSI-RS configured or only CSI-RS measurement configured; otherwise, $N_{\text{SCC_CSIRS_FR2_NCM}} = 0$. Note 9: $N_{\text{SCC_SSB}} = \text{Number of configured SCell(s) with only SSB based L3 measurement configured, which is measured without MG.}$ Note 10: $N_{\text{PCC_CCA_RSSI/CO}} = 1$ if PSCC is configured with RSSI/CO measurements without MG when RMTC and SMTC are overlapping; $N_{\text{SCC_CCA_RSSI/CO}} = \text{Number of MOs for SCell(s) configured with RSSI/CO measurements without MG when RMTC and SMTC are overlapping.}$						

9.1.5.1.3 NR-DC mode: carrier-specific scaling factor for SSB-based and CSI-RS based L3 measurements performed outside gaps

For UE configured with NR-DC operation, the carrier-specific scaling factor $CSSF_{\text{outside_gap},i}$ for intra-frequency SSB-based measurement, inter-frequency SSB-based measurements performed outside measurements gaps and intra-frequency CSI-RS based L3 measurement will be as specified in Table 9.1.5.1.3-1.

Table 9.1.5.1.3-1: $CSSF_{\text{outside_gap},i}$ scaling factor for NR-DC mode

Scenario	$CSSF_{\text{outside_gap},i}$ for FR1 PCC	$CSSF_{\text{outside_gap},i}$ for FR1 SCC	$CSSF_{\text{outside_gap},i}$ for FR2 PSCC	$CSSF_{\text{outside_gap},i}$ for FR2 SCC where neighbour cell measurement is not required	$CSSF_{\text{outside_gap},i}$ for inter-frequency MO with no measurement gap
FR1 + FR2 NR-DC (FR1 PCell and FR2 PSCell) Note 1	$1+N_{\text{PCC_CSIRS}}$	$2 \times (N_{\text{SCC_SSB}} + Y + 2 \times N_{\text{SCC_CSIRS}})$	$2 \times (1 + N_{\text{PSCC_CSIRS}})$ ^{Note}	$2 \times (N_{\text{SCC_SSB}} + Y + 2 \times N_{\text{SCC_CSIRS}})$	$2 \times (N_{\text{SCC_SSB}} + Y + 2 \times N_{\text{SCC_CSIRS}})$
Note 1: NR-DC in Rel-15 only includes the scenarios where all serving cells in MCG in FR1 and all serving cells in SCG in FR2. Note 2: $CSSF_{\text{outside_gap},i} = 1$ if no SCell is configured and no inter-frequency MO without gap and only SSB based L3 measurement is configured on PSCC; $CSSF_{\text{outside_gap},i} = 2$ if no SCell is configured and no inter-frequency MO without gap and either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement is configured on PSCC. Note 3: Y is the number of configured inter-frequency SSB based frequency layers without MG that are being measured outside of MG; otherwise, it is 0. Note 4: $N_{\text{PCC_CSIRS}} = 1$ if PCC is with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured; otherwise, $N_{\text{PCC_CSIRS}} = 0$. Note 5: $N_{\text{PSCC_CSIRS}} = 1$ if PSCC is with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured; otherwise, $N_{\text{PSCC_CSIRS}} = 0$. Note 6: $N_{\text{SCC_CSIRS}}$ = Number of configured SCell(s) with either both SSB and CSI-RS based L3 measurement configured or only CSI-RS based L3 measurement configured Note 8: $N_{\text{SCC_SSB}}$ = Number of configured SCell(s) with only SSB based L3 measurement configured, which is measured without MG.					

9.1.5.1.4 NE-DC mode: carrier-specific scaling factor for SSB-based and CSI-RS based measurements performed outside gaps

For UE configured with NE-DC operation, the carrier-specific scaling factor $CSSF_{\text{outside_gap},i}$ for intra-frequency SSB-based measurement and inter-frequency SSB-based measurements performed outside measurements gaps and intra-frequency CSI-RS based L3 measurement will be as specified in Table 9.1.5.1.4-1.

Table 9.1.5.1.4-1: $CSSF_{\text{outside_gap},i}$ scaling factor for NE-DC mode

Scenario	$CSSF_{\text{outside_gap},i}$ for FR1 PCC	$CSSF_{\text{outside_gap},i}$ for FR1 SCC	$CSSF_{\text{outside_gap},i}$ for FR2 PCC	$CSSF_{\text{outside_gap},i}$ for FR2 SCC where neighbour cell measurement is required	$CSSF_{\text{outside_gap},i}$ for FR2 SCC where neighbour cell measurement is not required	$CSSF_{\text{outside_gap},i}$ for inter-frequency MO with no measurement gap
NE-DC with FR1 only CA	$1+N_{\text{PCC_CSIRS}}$	$N_{\text{SCC_SSB}} + Y + 2 \times N_{\text{SCC_CSIRS}}$	N/A	N/A	N/A	$N_{\text{SCC_SSB}} + Y + 2 \times N_{\text{SCC_CSIRS}}$
NE-DC with FR2 only intra band CA	N/A	N/A	$1+N_{\text{PCC_CSIRS}}$	N/A	$N_{\text{SCC_SSB}} + Y + 2 \times N_{\text{SCC_CSIRS}}$	$N_{\text{SCC_SSB}} + Y + 2 \times N_{\text{SCC_CSIRS}}$
NE-DC with FR2 only inter band CA	N/A	N/A	$1+N_{\text{PCC_CSIRS}}$	$2 \times (1 + N_{\text{SCC_CSIRS_FR2_NCM}})$ ^{Note 3,5}	$2 \times (N_{\text{SCC_SSB}} + Y + 2 \times N_{\text{SCC_CSIRS}} - 1 - N_{\text{SCC_CSIRS_FR2_NCM}})$	$2 \times (N_{\text{SCC_SSB}} + Y + 2 \times N_{\text{SCC_CSIRS}} - 1 - N_{\text{SCC_CSIRS_FR2_NCM}})$

NE-DC with FR1 +FR2 CA (FR1 PCell) ^{Note 1}	$1+N_{PCC_CSIRS}$	$2 \times (N_{SCC_SSB} + Y + 2 \times N_{SCC_CSIRS} - 1 - N_{SCC_CSIRS_FR2_NCM})$	N/A	$2 \times (1 + N_{SCC_CSIRS_FR2_NCM})$ ^{Note 3,5}	$2 \times (N_{SCC_SSB} + Y + 2 \times N_{SCC_CSIRS} - 1 - N_{SCC_CSIRS_FR2_NCM})$	$2 \times (N_{SCC_SSB} + Y + 2 \times N_{SCC_CSIRS} - 1 - N_{SCC_CSIRS_FR2_NCM})$
Note 1: Only one FR1 operating band and one FR2 operating band are included for FR1+FR2 inter-band CA. Note 2: Selection of FR2 SCC where neighbour cell measurement is required follows clause 9.2.3.2. Note 3: $CSSF_{outside_gap,i} = 1$ if only one SCell is configured and no inter-frequency MO without gap and only SSB based L3 measurement is configured on SCC; $CSSF_{outside_gap,i} = 2$ if only one SCell is configured and no inter-frequency MO without gap and either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement is configured on SCC. Note 4: Y is the number of configured inter-frequency MOs without MG that are being measured outside of MG; otherwise, it is 0. Note 5: Only two NR FR2 operating band are included for NE-DC with FR2 only inter-band CA. Note 6: $N_{PCC_CSIRS} = 1$ if PCC is with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured; otherwise, $N_{PCC_CSIRS} = 0$. Note 7: N_{SCC_CSIRS} = Number of configured SCell(s) with either both SSB and CSI-RS based L3 measurement configured or only CSI-RS based L3 measurement configured Note 8: $N_{SCC_CSIRS_FR2_NCM} = 1$ if FR2 SCC, where neighbour cell measurement is required, is with either both SSB and CSI-RS configured or only CSI-RS measurement configured; otherwise, $N_{SCC_CSIRS_FR2_NCM} = 0$. Note 9: N_{SCC_SSB} = Number of configured SCell(s) with only SSB based L3 measurement configured, which is measured without MG.						

9.1.5.2 Monitoring of multiple layers within gaps

For a UE supporting concurrent gaps and when concurrent gaps are configured the carrier-specific scaling factor $CSSF_{within_gap,i}$ for a measurement object i derived in this chapter is applied to following measurement types for the associated measurement gap:

- SSB-based intra-frequency measurement object with no measurement gap in clause 9.2.5 and 9.2A.5, when
 - all of the SMTC occasions of this intra-frequency measurement object are overlapped with the associated measurement gap in concurrent measurement gaps, or
 - part of the SMTC occasions of this intra-frequency measurement object are overlapped with the associated measurement gap and all the SMTC occasions of this intra-frequency measurement object are overlapped with the union of concurrent measurement gaps.
- SSB-based intra-frequency measurement object with measurement gap in clause 9.2.6 and 9.2A.6.
- CSI-RS based inter-frequency measurement in clause 9.10.3, when CSI-RS resources for L3 measurement of this inter-frequency measurement object are overlapped by the measurement gap or the associated measurement gap in concurrent measurement gaps.
- CSI-RS based inter-frequency measurement in clause 9.10.3, when CSI-RS resources for L3 measurement of this inter-frequency measurement object are partially overlapped by the measurement gap or the associated measurement gap in concurrent measurement gaps.
- CSI-RS based intra-frequency measurement in clause 9.10.2, when all CSI-RS resources for L3 measurement of this intra-frequency measurement object are partially overlapped with the associated measurement gap and all CSI-RS resources for L3 measurement of this intra-frequency measurement object are overlapped with the union of the configured concurrent measurement gaps.
- SSB-based inter-frequency measurement object with measurement gap in clause 9.3.4.
- SSB-based inter-frequency measurement object without measurement gap for UE capable of *interFrequencyMeas-NoGap* in clause 9.3.9, when
 - all of the SMTC occasions of this inter-frequency measurement object are overlapped with the measurement gap or associated measurement gap in concurrent measurement gaps, or
 - part of the SMTC occasions of this inter-frequency measurement object are overlapped with the associated measurement gap and all the SMTC occasions of this inter-frequency measurement object are overlapped with the union of concurrent measurement gaps, or

- part of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap or associated measurement gap in concurrent measurement gaps and the flag *interFrequencyConfig-NoGap-r16* is not configured by the Network.
- NR PRS-based measurements for positioning in clause 9.9.
- E-UTRA Inter-RAT measurement object in clauses 9.4.2 and 9.4.3.

Otherwise, the carrier-specific scaling factor $CSSF_{\text{within_gap},i}$ for a measurement object i derived in this chapter is applied to following measurement types:

- SSB-based intra-frequency measurement object with no measurement gap in clause 9.2.5 and 9.2A.5, when all of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement.
- SSB-based intra-frequency measurement object with measurement gap in clause 9.2.6 and 9.2A.6.
- CSI-RS based inter-frequency measurement in clause 9.10.3, when CSI-RS resources for L3 measurement of this inter-frequency measurement object are overlapped by the measurement gap.
- CSI-RS based inter-frequency measurement in clause 9.10.3, when CSI-RS resources for L3 measurement of this inter-frequency measurement object are partially overlapped by the measurement gap.
- SSB-based inter-frequency measurement object with measurement gap in clause 9.3.4.
- SSB-based inter-frequency measurement object without measurement gap for UE capable of *interFrequencyMeas-NoGap* in clause 9.3.9, when
 - all of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap, or
 - part of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap, but the flag *interFrequencyConfig-NoGap-r16* is not configured by the Network.
- Intra-frequency RSSI/CO measurement with measurement gap in clause 9.2A.7.
- Intra-frequency RSSI/CO measurement with no measurement gap in clause 9.2A.7 when all of the RMTC occasions of this intra-frequency RSSI/CO measurement are overlapped by the measurement gap.
- Inter-frequency RSSI/CO measurement in clause 9.3A.8 and 9.3A.9.
- E-UTRA Inter-RAT measurement object in clauses 9.4.2 and 9.4.3.
- NR PRS-based measurements for positioning in clause 9.9.
- E-UTRA Inter-RAT RSTD and E-CID measurements in clauses 9.4.4 and 9.4.5.
- For a UE in E-UTRA-NR dual connectivity operation, NR SSB-based Inter-RAT measurement object configured by the E-UTRAN PCell (TS 36.133 [15] clause 8.17.4) on an NR serving carrier
 - the SSB is not completely contained in the active BWP of the UE, or
 - all of the SMTC occasions of this inter-RAT measurement object are overlapped by the measurement gap;
- NR SSB-based Inter-RAT measurement object configured by the E-UTRAN PCell (TS 36.133 [15] clause 8.17.4) on an NR non-serving carrier.
- E-UTRAN Inter-frequency measurement object configured by the E-UTRAN PCell (TS 36.133 [15] clause 8.17.3) and by the E-UTRAN PSCell (TS 36.133 [15] clause 8.19.3).
- E-UTRAN Inter-frequency RSTD measurement configured by the E-UTRAN PCell (TS 36.133 [15] clause 8.17.15).
- UTRA Inter-RAT measurement object configured by the E-UTRAN PCell (TS 36.133 [15] clauses 8.17.5 to 8.17.12).
- GSM Inter-RAT measurements configured by the E-UTRAN PCell (TS 36.133 [15] clauses 8.17.13 and 8.17.14).

The UE is expected to conduct the measurement of this measurement object i only within the measurement gap or the associated measurement gap if concurrent measurement gaps are configured. If UE is configured with concurrent measurement gaps and an association between measurement object i and certain measurement gap is provided, the requirements are defined assuming the UE shall conduct the measurement of this measurement object i within the associated measurement gap.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, $CSSF_{\text{within_gap},i}$ and requirements derived from $CSSF_{\text{outside_gap},i}$ are not specified.

Number of SSB layers shall include SSB for mobility and associated SSB for CSI-RS mobility. The *ssbfrequency* is counted only once if the *ssbfrequency* for mobility and associated SSB are the same, or *ssbfrequency* and *smtc* in multiple MOs are the same.

SSB-based measurement and CSI-RS based measurement for mobility configured in the same measurement object are considered as different layers.

9.1.5.2.1 EN-DC mode: carrier-specific scaling factor for SSB, CSI-RS-based L3 measurements and RSSI and channel occupancy measurements performed within gaps

The scaling value $CSSF_{\text{within_gap},i}$ below has been derived without considering GSM inter-RAT carriers.

When one or more measurement objects are monitored within measurement gaps, the carrier specific scaling factor for a target measurement object with index i is designated as $CSSF_{\text{within_gap},i}$ and is derived as described in this clause.

For UE supporting per-FR gap, for each measurement object i that are measured based on effective MGRP as defined in clause 9.1.2, $CSSF_{\text{within_gap},i}$ used for deriving the measurement requirements is defined as $2 \cdot N_{\text{with_CSI-RS}} + N_{\text{SSB_only}}$, where

- $N_{\text{with_CSI-RS}}$ is the number of measurement objects with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured in the same FR as measurement object i , and
- $N_{\text{SSB_only}}$ is the number of measurement objects with only SSB based L3 measurement configured in the same FR as measurement object i .

For a UE in E-UTRA-NR dual connectivity operation, if a SSB-based measurement object configured by PSCell and an NR SSB-based inter-RAT measurement object configured by E-UTRAN PCell are on the same carrier, they shall be counted as one measurement object in $M_{\text{tot},i,j}$, provided that they meet the measurement object merging conditions [in clause 9.1.3.2].

If measurement object i refers to an RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured, $CSSF_{\text{within_gap},i} = 1$. Otherwise, the $CSSF_{\text{within_gap},i}$ for other measurement objects (including RSTD measurement with periodicity $T_{\text{prs}} = 160\text{ms}$) participate in the gap competition are derived as below.

For each measurement gap j not used for an RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured within an arbitrary 160ms period, count the total number of intra-frequency measurement objects and inter-frequency/inter-RAT measurement objects which are candidates to be measured within the gap j .

- An NR measurement object with SSB measurement configured is a candidate to be measured in a gap if its SMTC duration is fully covered by the MGL excluding RF switching time. For intra-frequency NR carriers, if the higher layer in TS 38.331 [2] signaling of *smtc2* is configured, the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc2*; otherwise the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc1*.
- An NR measurement object with CSI-RS measurement configured is a candidate to be measured in a gap if the window confining all CSI-RS resources are fully covered by the MGL excluding RF switching time. -
- An NR measurement object with RSSI and channel occupancy measurement is a candidate to be measurement in a gap if the RMTC duration is fully covered by MGL excluding RF switching time

- An inter-RAT UTRA measurement object configured by E-UTRA PCell [15] is a candidate to be measured in all measurement gaps.
- An inter-frequency E-UTRA measurement object configured by E-UTRA PCell [15] is a candidate to be measured in all measurement gaps.
- For UEs which support and are configured with per FR gaps, the counting is done on a per FR basis, and for UEs which are configured with per UE gaps the counting is done on a per UE basis.
- $M_{\text{intra},i,j}$: Number of intra-frequency measurement objects, including both SSB, CSI-RS based and RSSI/CO measurement, which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{intra},i,j}$ equals 0.
- $M_{\text{inter},i,j}$: Number of NR inter-frequency layers including both SSB and CSI-RS based NR inter-RAT frequency layer and RSSI/CO measurement, configured by E-UTRA PCell, EUTRA inter-frequency measurement objects configured by E-UTRA PCell, or UTRA inter-RAT measurement objects configured by E-UTRA PCell which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{inter},i,j}$ equals 0.
- A measurement object i in $M_{\text{intra},i,j}$ and in $M_{\text{inter},i,j}$ is counted twice if the measurement object is configured with both RMTC and SMTC which are candidates to be measured in gap j where the measurement object i is also a candidate
- $M_{\text{tot},i,j} = M_{\text{intra},i,j} + M_{\text{inter},i,j}$: Total number of intra-frequency, inter-frequency and inter-RAT frequency layers which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{tot},i,j}$ equals 0.

For each measurement gap j used for an RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured within an arbitrary 160ms period, $M_{\text{intra},i,j} = M_{\text{inter},i,j} = M_{\text{tot},i,j} = 0$.

The carrier specific scaling factor $\text{CSSF}_{\text{within_gap},i}$ is given by:

If *measGapSharingScheme* is equal sharing, $\text{CSSF}_{\text{within_gap},i} = \max(\text{ceil}(R_i \times M_{\text{tot},i,j}))$, where $j = 0 \dots (160/\text{MGRP}) - 1$

If *measGapSharingScheme* is not equal sharing and

- measurement object i is an intra-frequency measurement object, $\text{CSSF}_{\text{within_gap},i}$ is the maximum among
 - $\text{ceil}(R_i \times K_{\text{intra}} \times M_{\text{intra},i,j})$ in gaps where $M_{\text{inter},i,j} \neq 0$, where $j = 0 \dots (160/\text{MGRP}) - 1$
 - $\text{ceil}(R_i \times M_{\text{intra},i,j})$ in gaps where $M_{\text{inter},i,j} = 0$, where $j = 0 \dots (160/\text{MGRP}) - 1$
- measurement object i is an inter-frequency or inter-RAT measurement object, $\text{CSSF}_{\text{within_gap},i}$ is the maximum among
 - $\text{ceil}(R_i \times K_{\text{inter}} \times M_{\text{inter},i,j})$ in gaps where $M_{\text{intra},i,j} \neq 0$, where $j = 0 \dots (160/\text{MGRP}) - 1$
 - $\text{ceil}(R_i \times M_{\text{inter},i,j})$ in gaps where $M_{\text{intra},i,j} = 0$, where $j = 0 \dots (160/\text{MGRP}) - 1$

Where R_i is the maximal ratio of the number of measurement gap where measurement object i is a candidate to be measured over the number of measurement gap where measurement object i is a candidate and not used for RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured within an arbitrary 1280ms period.

9.1.5.2.2 SA mode: carrier-specific scaling factor for SSB, CSI-RS-based L3 measurements and RSSI and channel occupancy measurements performed within gaps

When one or more measurement objects are monitored within measurement gaps, the carrier specific scaling factor for a target measurement object with index i is designated as $\text{CSSF}_{\text{within_gap},i}$ and is derived as described in this clause.

For UE supporting per-FR gap, for each measurement object i that are measured based on effective MGRP as defined in clause 9.1.2, $\text{CSSF}_{\text{within_gap},i}$ used for deriving the measurement requirements is defined as $2 \times N_{\text{with_CSI-RS}} + N_{\text{SSB_only}}$, where

- $N_{\text{with_CSI-RS}}$ is the number of measurement objects with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured in the same FR as measurement object i , and
- $N_{\text{SSB_only}}$ is the number of measurement objects with only SSB based L3 measurement configured in the same FR as measurement object i .

If a UE capable of concurrent gaps is configured with concurrent gaps, the carrier specific scaling factor is calculated separately for each gap pattern, [provided that the association between measurement objects and gap pattern is configured by network. Only the measurement objects associated to the same measurement gap pattern are counted when deriving $\text{CSSF}_{\text{within_gap},i}$ for a target measurement object with index i]. In case of collision between concurrent measurement gaps, some measurement gap occasions may be dropped according to clause [9.1.X2.x]. The dropped gap occasions will not be used in deriving $\text{CSSF}_{\text{within_gap},i}$.

If measurement object i refers to a long-periodicity measurement which is any of:

- an E-UTRA RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured, or
- an NR measurement for positioning frequency layer i with $T_{\text{available_PRS},i} > 160\text{ms}$, where $T_{\text{available_PRS},i}$ is defined in clauses 9.9.2.5, 9.9.3.5, 9.9.4.5 and 9.9.6.5 for RSTD, PRS-RSRP, UE Rx-Tx time difference and PRS-RSRPP measurements, respectively.

then $\text{CSSF}_{\text{within_gap},i} = 1$. Otherwise, the $\text{CSSF}_{\text{within_gap},i}$ for other measurement objects (including E-UTRA RSTD measurement with periodicity $T_{\text{prs}} = 160\text{ms}$) participate in the gap competition and the $\text{CSSF}_{\text{within_gap},i}$ are derived as below.

Table 9.1.5.2.2-1: void

When multiple positioning frequency layers are configured,

- for each positioning frequency layer i , $\text{CSSF}_{\text{within_gap},i}$ is derived with the following steps assuming no other positioning frequency layer is configured.
- for each RRM frequency layer i , $\text{CSSF}_{\text{within_gap},i}$ is derived as follows:
 - an intermediate $\text{CSSF}_{\text{within_gap},i,k}$ is derived with the following steps assuming only positioning frequency layer k is configured, and
- $\text{CSSF}_{\text{within_gap},i} = \max(\text{CSSF}_{\text{within_gap},i,k})$, where $k = 0 \dots K-1$, and K is the number of configured positioning frequency layers. For each measurement gap j not used for a long-periodicity measurement defined above, count the total number of intra-frequency measurement objects and inter-frequency/inter-RAT measurement objects and NR PRS measurements on all positioning frequency layers which are candidates to be measured within the gap j .
 - An NR measurement object with SSB measurement configured is a candidate to be measured in a gap if its SMTC duration is fully covered by the MGL excluding RF switching time. For intra-frequency NR measurement objects, if the higher layer in TS 38.331 [2] signaling of *smtc2* is configured, the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc2*; otherwise the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc1*.
 - An NR measurement object with CSI-RS measurement configured is a candidate to be measured in a gap if the window confining all CSI-RS resources are fully covered by the MGL excluding RF switching time.
 - An NR measurement object with RSSI and channel occupancy measurement is a candidate to be measurement in a gap if the RMTC duration is fully covered by MGL excluding RF switching time
 - An inter-frequency SFTD measurement object, if to be measured with measurement gaps, is a candidate to be measured in all measurement gaps.
 - A positioning frequency layer is counted as candidate for a MG occasion if at least one PRS resource on that positioning frequency layer is fully covered by the MGL excluding RF switching time.
 - For UEs which support and are configured with per FR gaps, the counting is done on a per FR basis, and for UEs which are configured with per UE gaps the counting is done on a per UE basis. For UEs which support and are configured with per FR gaps, the CSSF requirements do not apply when NR PRS measurement in one FR gap collides with SSB/CSI-RS/PRS measurements in the other FR gap in time domain.

- $M_{\text{intra},i,j}$: Number of intra-frequency measurement objects, including both SSB, CSI-RS based and RSSI/CO measurements, which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{intra},i,j}$ equals 0.
- $M_{\text{inter},i,j}$: Number of NR inter-frequency layers including both SSB and CSI-RS based, EUTRA inter-RAT and UTRA inter-RAT frequency layers, up to one positioning frequency layer, RSSI/CO measurements, which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{inter},i,j}$ equals 0.
- A measurement object i in $M_{\text{intra},i,j}$ and in $M_{\text{inter},i,j}$ is counted twice if the measurement object is configured with both RMTC and SMTC which are candidates to be measured in gap j where the measurement object i is also a candidate
- $M_{\text{tot},i,j} = M_{\text{intra},i,j} + M_{\text{inter},i,j}$: Total number of intra-frequency, inter-frequency and inter-RAT frequency layers and up to one NR PRS measurement on any one positioning frequency layer, which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{tot},i,j}$ equals 0.

For each measurement gap j used for a long-periodicity measurement defined above, $M_{\text{intra},i,j} = M_{\text{inter},i,j} = M_{\text{tot},i,j} = 0$. The carrier specific scaling factor $\text{CSSF}_{\text{within_gap},i}$ is given by:

If *measGapSharingScheme* is equal sharing, $\text{CSSF}_{\text{within_gap},i} = \max(\text{ceil}(R_i \times M_{\text{tot},i,j}))$, where $j=0 \dots (160/\text{MGRP})-1$

If *measGapSharingScheme* is not equal sharing and

- measurement object i is an intra-frequency measurement object, $\text{CSSF}_{\text{within_gap},i}$ is the maximum among
 - $\text{ceil}(R_i \times K_{\text{intra}} \times M_{\text{intra},i,j})$ in gaps where $M_{\text{inter},i,j} \neq 0$, where $j=0 \dots (160/\text{MGRP})-1$
 - $\text{ceil}(R_i \times M_{\text{intra},i,j})$ in gaps where $M_{\text{inter},i,j} = 0$, where $j=0 \dots (160/\text{MGRP})-1$
- measurement object i is an inter-frequency or inter-RAT measurement object or NR PRS measurement on any one positioning frequency layer, $\text{CSSF}_{\text{within_gap},i}$ is the maximum among
 - $\text{ceil}(R_i \times K_{\text{inter}} \times M_{\text{inter},i,j})$ in gaps where $M_{\text{intra},i,j} \neq 0$, where $j=0 \dots (160/\text{MGRP})-1$
 - $\text{ceil}(R_i \times M_{\text{inter},i,j})$ in gaps where $M_{\text{intra},i,j} = 0$, where $j=0 \dots (160/\text{MGRP})-1$

Where R_i is the maximal ratio of the number of measurement gap where measurement object i is a candidate to be measured over the number of measurement gap where measurement object i is a candidate and not used for a long-periodicity measurement defined above.

$\text{CSSF}_{\text{within_gap},k}=1$ during $T_{\text{Detect, E-UTRAN FDD}}$ specified in clause 9.4.4.1.2.2 and $T_{\text{Detect, E-UTRAN TDD}}$ specified in clause 9.4.4.2.2.2, where k is the carrier frequency where the UE is performing cell detection of the inter-RAT E-UTRA OTDOA assistance data reference cell when acquiring the subframe and slot timing of the cell according to clause 9.4.4. In this case, the UE cell identification and measurement periods derived based on $\text{CSSF}_{\text{within_gap},i}$ in clauses 9.2.5.1, 9.2.5.2, 9.2.6.2, 9.2.6.3, 9.3.4, 9.3.5, 9.4.2.2, 9.4.2.3 and 9.10.2 may be extended for measurement objects of which the cell identification and measurement periods are overlapped with $T_{\text{Detect, E-UTRAN FDD}}$ and $T_{\text{Detect, E-UTRAN TDD}}$.

9.1.5.2.3 NE-DC: carrier-specific scaling factor for SSB-based and CSI-RS based L3 measurements performed within gaps

When one or more measurement objects are monitored within measurement gaps, the carrier specific scaling factor for a target measurement object with index i is designated as $\text{CSSF}_{\text{within_gap},i}$ and is derived as described in this clause.

For UE supporting per-FR gap, for each measurement object i that are measured based on effective MGRP as defined in clause 9.1.2, $\text{CSSF}_{\text{within_gap},i}$ used for deriving the measurement requirements is defined as $2 \times N_{\text{with_CSI-RS}} + N_{\text{SSB_only}}$, where

- $N_{\text{with_CSI-RS}}$ is the number of measurement objects with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured in the same FR as measurement object i , and
- $N_{\text{SSB_only}}$ is the number of measurement objects with only SSB based L3 measurement configured in the same FR as measurement object i .

If measurement object i refers to a long-periodicity measurement which is any of:

- an E-UTRA RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured, or
- an NR measurement for positioning frequency layer i with $T_{\text{available_PRS},i} > 160\text{ms}$, where $T_{\text{available_PRS},i}$ is defined in clauses 9.9.2.5, 9.9.3.5, 9.9.4.5 and 9.9.6.5 for RSTD, PRS-RSRP, UE Rx-Tx time difference and PRS-RSRPP measurements, respectively.

then $\text{CSSF}_{\text{within_gap},i} = 1$. Otherwise, the $\text{CSSF}_{\text{within_gap},i}$ for other measurement objects (including E-UTRA RSTD measurement with periodicity $T_{\text{prs}} = 160\text{ms}$) participate in the gap competition are derived as below.

When multiple positioning frequency layers are configured,

- for each positioning frequency layer i , $\text{CSSF}_{\text{within_gap},i}$ is derived with the following steps assuming no other positioning frequency layer is configured.
- for each RRM frequency layer i , $\text{CSSF}_{\text{within_gap},i}$ is derived as follows:
 - an intermediate $\text{CSSF}_{\text{within_gap},i,k}$ is derived with the following steps assuming only positioning frequency layer k is configured, and
 - $\text{CSSF}_{\text{within_gap},i} = \max(\text{CSSF}_{\text{within_gap},i,k})$, where $k = 0 \dots K-1$, and K is the number of configured positioning frequency layers.

For each measurement gap j not used for a long-periodicity measurement defined above, count the total number of intra-frequency measurement objects and inter-frequency/inter-RAT measurement objects and NR PRS measurements on all positioning frequency layers which are candidates to be measured within the gap j .

- An NR measurement object with SSB measurement configured is a candidate to be measured in a gap if its SMTC duration is fully covered by the MGL excluding RF switching time. For intra-frequency NR measurement objects, if the higher layer in TS 38.331 [2] signaling of *smtc2* is configured, the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc2*; otherwise the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc1*.
- An NR measurement object with CSI-RS measurement configured is a candidate to be measured in a gap if the window confining all CSI-RS resources are fully covered by the MGL excluding RF switching time.
- An inter-RAT measurement object is a candidate to be measured in all measurement gaps.
- An inter-frequency E-UTRA measurement object is a candidate to be measured in all measurement gaps.
- A positioning frequency layer is counted as candidate for a MG occasion if at least one PRS resource on that positioning frequency layer is fully covered by the MGL excluding RF switching time.

For UEs which support and are configured with per FR gaps, the counting is done on a per FR basis, and for UEs which are configured with per UE gaps the counting is done on a per UE basis. For UEs which support and are configured with per FR gaps, the CSSF requirements do not apply when NR PRS measurement in one FR gap collides with SSB/CSI-RS/PRS measurements in the other FR gap in time domain.

If the number of configured interfrequency and interRAT measurement objects and NR PRS measurements on all positioning frequency layers is non-zero and the UE is configured with per UE gaps, or if the UE is configured with per FR gaps:

FR1 and FR2 intrafrequency measurement objects belong to group A

Interfrequency and interRAT measurement objects belong to group B

$M_{\text{groupA},i,j}$: Sum of the number of FR1 intra-frequency measurement objects $M_{\text{intra-FR1},i,j}$ and the number of FR2 intra-frequency measurement objects $M_{\text{intra-FR2},i,j}$, including both SSB and CSI-RS based, which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{groupA},i,j}$ equals 0.

$M_{\text{groupB},i,j}$: Number of NR inter-frequency layers including both SSB and CSI-RS based, EUTRA inter-RAT and UTRA inter-RAT measurement objects, up to one positioning frequency layer, which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{groupB},i,j}$ equals 0.

If the number of configured inter-frequency and inter-RAT measurement objects and NR PRS measurements on all positioning frequency layers is zero and the UE is configured with per UE gaps:

FR1 intrafrequency measurement objects belong to group A

FR2 intrafrequency measurement objects belong to group B

$M_{\text{groupA},i,j}$: The number of FR1 intrafrequency measurement objects $M_{\text{intra-FR1},i,j}$, including both SSB and CSI-RS based, which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{groupA},i,j}$ equals 0.

$M_{\text{groupB},i,j}$: The number of FR2 intrafrequency measurement objects $M_{\text{intra-FR2},i,j}$, including both SSB and CSI-RS based, which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{groupB},i,j}$ equals 0.

$M_{\text{tot},i,j} = M_{\text{groupA},i,j} + M_{\text{groupB},i,j}$: Total number of group A and group B measurement objects which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{tot},i,j}$ equals 0.

For each measurement gap j used for a long-periodicity measurement defined above, $M_{\text{intra},i,j} = M_{\text{inter},i,j} = M_{\text{tot},i,j} = 0$. The carrier specific scaling factor $\text{CSSF}_{\text{within_gap},i}$ is given by:

If *measGapSharingScheme* is equal sharing, $\text{CSSF}_{\text{within_gap},i} = \max(\text{ceil}(R_i \times M_{\text{tot},i,j}))$, where $j=0 \dots (160/\text{MGRP})-1$

If *measGapSharingScheme* is not equal sharing and

- measurement object i is a group A measurement object, $\text{CSSF}_{\text{within_gap},i}$ is the maximum among
 - $\text{ceil}(R_i \times K_{\text{intra}} \times M_{\text{groupA},i,j})$ in gaps where $M_{\text{groupB},i,j} \neq 0$, where $j=0 \dots (160/\text{MGRP})-1$
 - $\text{ceil}(R_i \times M_{\text{groupA},i,j})$ in gaps where $M_{\text{groupB},i,j} = 0$, where $j=0 \dots (160/\text{MGRP})-1$
- measurement object i is an group B measurement object, $\text{CSSF}_{\text{within_gap},i}$ is the maximum among
 - $\text{ceil}(R_i \times K_{\text{inter}} \times M_{\text{groupB},i,j})$ in gaps where $M_{\text{groupA},i,j} \neq 0$, where $j=0 \dots (160/\text{MGRP})-1$
 - $\text{ceil}(R_i \times M_{\text{groupB},i,j})$ in gaps where $M_{\text{groupA},i,j} = 0$, where $j=0 \dots (160/\text{MGRP})-1$

Where R_i is the maximal ratio of the number of measurement gap where measurement object i is a candidate to be measured over the number of measurement gap where measurement object i is a candidate and not used for a long-periodicity measurement defined above.

9.1.5.2.4 NR-DC: carrier-specific scaling factor for SSB-based and CSI-RS-based L3 measurements performed within gaps

When one or more measurement objects are monitored within measurement gaps, the carrier specific scaling factor for a target measurement object with index i is designated as $\text{CSSF}_{\text{within_gap},i}$ and is derived as described in this clause.

For UE supporting per-FR gap, for each measurement object i that are measured based on effective MGRP as defined in clause 9.1.2, $\text{CSSF}_{\text{within_gap},i}$ used for deriving the measurement requirements is defined as $2 \times N_{\text{with_CSI-RS}} + N_{\text{SSB_only}}$, where

- $N_{\text{with_CSI-RS}}$ is the number of measurement objects with either both SSB and CSI-RS based L3 configured or only CSI-RS based L3 measurement configured in the same FR as measurement object i , and
- $N_{\text{SSB_only}}$ is the number of measurement objects with only SSB based L3 measurement configured in the same FR as measurement object i .

If measurement object i refers to a long-periodicity measurement which is any of:

- an E-UTRA RSTD measurement with periodicity $T_{\text{prs}} > 160\text{ms}$ or with periodicity $T_{\text{prs}} = 160\text{ms}$ but *prs-MutingInfo-r9* is configured, or
- an NR measurement for positioning frequency layer i with $T_{\text{available_PRS},i} > 160\text{ms}$, where $T_{\text{available_PRS},i}$ is defined in clauses 9.2.5, 9.3.5, 9.4.5 and 9.6.5 for RSTD, PRS-RSRP, UE Rx-Tx time difference and PRS-RSRPP measurements, respectively.

then $CSSF_{within_gap,i}=1$. Otherwise, the $CSSF_{within_gap,i}$ for other measurement objects (including E-UTRA RSTD measurement with periodicity $T_{prs}=160ms$) participate in the gap competition and the $CSSF_{within_gap,i}$ are derived as below.

When multiple positioning frequency layers are configured,

- for each positioning frequency layer i , $CSSF_{within_gap,i}$ is derived with the following steps assuming no other positioning frequency layer is configured.
- for each RRM frequency layer i , $CSSF_{within_gap,i}$ is derived as follows:
 - an intermediate $CSSF_{within_gap,i,k}$ is derived with the following steps assuming only positioning frequency layer k is configured, and
 - $CSSF_{within_gap,i} = \max(CSSF_{within_gap,i,k})$, where $k=0 \dots K-1$, and K is the number of configured positioning frequency layers.

For each measurement gap j not used for an RSTD measurement with periodicity $T_{prs}>160ms$ or with periodicity $T_{prs}=160ms$ but *prs-MutingInfo-r9* is configured within an arbitrary 160ms period, count the total number of intra-frequency measurement objects and inter-frequency/inter-RAT measurement objects and NR PRS measurements on all positioning frequency layers which are candidates to be measured within the gap j .

- An NR measurement object with SSB measurement configured is a candidate to be measured in a gap if its SMTC duration is fully covered by the MGL excluding RF switching time. For intra-frequency NR measurement objects, if the higher layer in TS 38.331 [2] signaling of *smtc2* is configured, the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc2*; otherwise the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc1*.
- An NR measurement object with CSI-RS measurement configured is a candidate to be measured in a gap if the window confining all CSI-RS resources are fully covered by the MGL excluding RF switching time.
- A positioning frequency layer is counted as candidate for a MG occasion if at least one PRS resource on that positioning frequency layer is fully covered by the MGL excluding RF switching time.

For UEs which support and are configured with per FR gaps, the counting is done on a per FR basis, and for UEs which are configured with per UE gaps the counting is done on a per UE basis. For UEs which support and are configured with per FR gaps, the CSSF requirements do not apply when NR PRS measurement in one FR gap collides with SSB/CSI-RS/PRS measurements in the other FR gap in time domain.

If the number of configured interfrequency and interRAT measurement objects and NR PRS measurements on all positioning frequency layers is non-zero and the UE is configured with per UE gaps, or if the UE is configured with per FR gaps:

FR1 and FR2 intrafrequency measurement objects belong to group A

Interfrequency and interRAT measurement objects and up to one NR PRS measurement on any one positioning frequency layer belong to group B

$M_{groupA,i,j}$: Sum of the number of FR1 intra-frequency measurement objects $M_{intra-FR1,i,j}$ and the number of FR2 intra-frequency measurement objects $M_{intra-FR2,i,j}$, including both SSB and CSI-RS based, which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{groupA,i,j}$ equals 0.

$M_{groupB,i,j}$: Number of NR inter-frequency layers including both SSB and CSI-RS based, EUTRA inter-RAT and UTRA inter-RAT measurement objects and up to one positioning frequency layer, which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{groupB,i,j}$ equals 0.

If the number of configured interfrequency and interRAT measurement objects and NR PRS measurements on all positioning frequency layers is zero and the UE is configured with per UE gaps:

FR1 intrafrequency measurement objects belong to group A

FR2 intrafrequency measurement objects belong to group B

$M_{\text{groupA},i,j}$: The number of FR1 intrafrequency measurement objects $M_{\text{intra-FR1},i,j}$, including both SSB and CSI-RS based, which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{groupA},i,j}$ equals 0.

$M_{\text{groupB},i,j}$: The number of FR2 intrafrequency measurement objects $M_{\text{intra-FR2},i,j}$, including both SSB and CSI-RS based, which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{groupB},i,j}$ equals 0.

$M_{\text{tot},i,j} = M_{\text{groupA},i,j} + M_{\text{groupB},i,j}$: Total number of group A and group B measurement objects which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{tot},i,j}$ equals 0.

For each measurement gap j used for a long-periodicity measurement defined above, $M_{\text{intra},i,j} = M_{\text{inter},i,j} = M_{\text{tot},i,j} = 0$. The carrier specific scaling factor $\text{CSSF}_{\text{within_gap},i}$ is given by:

If *measGapSharingScheme* is equal sharing, $\text{CSSF}_{\text{within_gap},i} = \max(\text{ceil}(R_i \times M_{\text{tot},i,j}))$, where $j=0 \dots (160/\text{MGRP})-1$

If *measGapSharingScheme* is not equal sharing and

- measurement object i is a group A measurement object, $\text{CSSF}_{\text{within_gap},i}$ is the maximum among
 - $\text{ceil}(R_i \times K_{\text{intra}} \times M_{\text{groupA},i,j})$ in gaps where $M_{\text{groupB},i,j} \neq 0$, where $j=0 \dots (160/\text{MGRP})-1$
 - $\text{ceil}(R_i \times M_{\text{groupA},i,j})$ in gaps where $M_{\text{groupB},i,j} = 0$, where $j=0 \dots (160/\text{MGRP})-1$
- measurement object i is an group B measurement object, $\text{CSSF}_{\text{within_gap},i}$ is the maximum among
 - $\text{ceil}(R_i \times K_{\text{inter}} \times M_{\text{groupB},i,j})$ in gaps where $M_{\text{groupA},i,j} \neq 0$, where $j=0 \dots (160/\text{MGRP})-1$
 - $\text{ceil}(R_i \times M_{\text{groupB},i,j})$ in gaps where $M_{\text{groupA},i,j} = 0$, where $j=0 \dots (160/\text{MGRP})-1$

R_i is the maximal ratio of the number of measurement gap where measurement object i is a candidate to be measured over the number of measurement gap where measurement object i is a candidate and not used for a long-periodicity measurement defined above.

9.1.5.2.5 SA mode: carrier-specific scaling factor for PRS-based measurements performed within gaps

The requirements in this clause apply for NR PRS-based measurements for positioning in clause 9.9.

When NR PRS-based measurements for positioning are configured on one or more positioning frequency layers within measurement gaps, the carrier specific scaling factor for a target PRS-based positioning measurement on a positioning frequency layer with index i is designated as $\text{CSSF}_{\text{within_gap},i}$ and is derived as described in clause 9.1.5.2.2.

NR Positioning measurement requirements for long periodicity measurements apply in case all PRS resources in the PFL are configured with periodicity > 160 ms.

9.1.5.2.6 NE-DC: carrier-specific scaling factor for PRS-based measurements performed within gaps

The requirements in this clause apply for NR PRS-based measurements for positioning in clause 9.9.

When NR PRS-based measurements for positioning are configured on one or more positioning frequency layers within measurement gaps, the carrier specific scaling factor for a target measurement on a positioning frequency layer with index i is designated as $\text{CSSF}_{\text{within_gap},i}$ and is derived as described in clause 9.1.5.2.3.

NR Positioning measurement requirements for long periodicity measurements apply in case all PRS resources in the PFL are configured with periodicity > 160 ms.

9.1.5.2.7 NR-DC: carrier-specific scaling factor for PRS-based measurements performed within gaps

The requirements in this clause apply for NR PRS-based measurements for positioning in clause 9.9.

When NR PRS-based measurements for positioning are configured on one or more positioning frequency layers within measurement gaps, the carrier specific scaling factor for a target measurement on a positioning frequency layer with index i is designated as $CSSF_{\text{within_gap},i}$ and is derived as described in clause 9.1.5.2.4.

NR Positioning measurement requirements for long periodicity measurements apply in case all PRS resources in the PFL are configured with periodicity > 160 ms.

9.1.5.3 Monitoring of multiple layers within NCSG

The measurement requirements derived from $CSSF_{\text{within_ncsg},i}$ defined in this clause are applicable provided that network provides NCSG pattern for measurement.

The carrier-specific scaling factor $CSSF_{\text{within_ncsg},i}$ for a measurement object i derived in this clause is applied to following measurement types:

- SSB-based intra-frequency measurement object without measurement gap as defined in clause 9.2.1 corresponding to an activated serving cell, when all of the SMTC occasions of this intra-frequency measurement object are overlapped by the NCSG;
- SSB-based intra-frequency measurement object with NCSG as defined in clause 9.2.1 corresponding to an activated serving cell (in non-dormancy) , when all or part of the SMTC occasions of this intra-frequency measurement object are overlapped by the NCSG;
- SSB-based intra-frequency measurement object corresponding to a deactivated Serving cell or to an activated Serving cell in dormancy, when all or part of the SMTC occasions of this intra-frequency measurement object are overlapped by the NCSG regardless of the UE capability reporting of *intraFreq-needForNCSG*;
- SSB-based inter-frequency measurement object without measurement gap as defined in clause 9.3.1, when all of the SMTC occasions of this inter-frequency measurement object are overlapped by the NCSG;
- SSB-based inter-frequency measurement object with NCSG as defined in clause 9.3.1;
- E-UTRA inter-RAT measurement object, when the measurement can be performed with no measurement gap but NCSG as defined in clause 9.4;

UE is expected to conduct the measurement of this measurement object i only within the NCSG.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present for an intra-frequency measurement object, and *smtc1* is fully overlapping with NCSG and *smtc2* is partially overlapping with NCSG, requirements derived from $CSSF_{\text{within_ncsg},i}$ and $CSSF_{\text{outside_gap},i}$ are not applicable.

9.1.5.3.1 SA mode: carrier-specific scaling factor for measurements performed within NCSG

When one or more measurement objects are monitored within NCSG, the carrier specific scaling factor for a target measurement object with index i is designated as $CSSF_{\text{within_ncsg},i}$ and is derived as described in this clause.

For each NCSG occasion j , count the total number of intra-frequency measurement objects and inter-frequency/inter-RAT measurement objects which are candidates to be measured within the occasion j .

- An NR measurement object with SSB measurement configured is a candidate to be measured in an NCSG occasion if its SMTC duration is fully covered by the ML. For intra-frequency NR measurement objects, if the higher layer in TS 38.331 [2] signaling of *smtc2* is configured, the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc2*; otherwise the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc1*.
- An inter-RAT E-UTRA measurement object configured is a candidate to be measured in all NCSG occasions.
- $M_{\text{intra},i,j}$: Number of intra-frequency measurement objects which are candidates to be measured in NCSG occasion j where the measurement object i is also a candidate. Otherwise $M_{\text{intra},i,j}$ equals 0.

- $M_{inter,i,j}$: Number of NR inter-frequency measurement objects and E-UTRA inter-RAT measurement objects which are candidates to be measured in NCSG occasion j where the measurement object i is also a candidate. Otherwise $M_{inter,i,j}$ equals 0.
- $M_{tot,i,j} = M_{intra,i,j} + M_{inter,i,j}$: Total number of intra-frequency, inter-frequency and inter-RAT measurement objects which are candidates to be measured in NCSG occasion j where the measurement object i is also a candidate. Otherwise $M_{tot,i,j}$ equals 0.

For UEs which support and are configured with per FR NCSG, the above counting is done on a per FR basis, and for UEs which are configured with per UE NCSG the counting is done on a per UE basis.

The carrier specific scaling factor $CSSF_{within_ncsg,i}$ is given by:

If *measGapSharingScheme* is equal sharing, $CSSF_{within_ncsg,i} = \max(M_{tot,i,j})$, where $j=0...(160/VIRP)-1$

If *measGapSharingScheme* is not equal sharing and

- measurement object i is an intra-frequency measurement object, $CSSF_{within_ncsg,i}$ is the maximum among
 - $\text{ceil}(K_{intra} \times M_{intra,i,j})$ in NCSG occasions where $M_{inter,i,j} \neq 0$, where $j=0...(160/VIRP)-1$
 - $M_{intra,i,j}$ in NCSG occasions where $M_{inter,i,j} = 0$, where $j=0...(160/VIRP)-1$
- measurement object i is an inter-frequency or inter-RAT measurement object, $CSSF_{within_ncsg,i}$ is the maximum among
 - $\text{ceil}(K_{inter} \times M_{inter,i,j})$ in NCSG occasions where $M_{intra,i,j} \neq 0$, where $j=0...(160/VIRP)-1$
 - $M_{inter,i,j}$ in NCSG occasions where $M_{intra,i,j} = 0$, where $j=0...(160/VIRP)-1$

9.1.6 Minimum requirement at transitions

When the measurement on one intra-frequency measurement object transitions from measurements performed outside gaps to measurements performed within gaps or vice versa during one measurement period, the cell identification and measurement period requirements with the longer delay apply.

When the measurement on one intra-frequency measurement object transitions from measurements performed outside gaps to measurements performed within NCSG or vice versa during one measurement period, the cell identification and measurement period requirements with the longer delay apply.

The carrier-specific scaling factor specified in clause 9.1.5 that applies to the other impacted measurement objects will also apply based on the longer measurement or cell identification delay before or after the transition.

When the UE transitions between DRX and non-DRX or when DRX cycle periodicity changes, the cell identification and measurement period requirements apply based on the longer delay before or after the transition.

Subsequent to this measurement period, the cell identification and measurement period requirements on each measurement object are corresponding to the second mode after transition.

9.1.7 Pre-configured measurement gap

9.1.7.1 Introduction

A UE capable of Pre-configured measurement gap (Pre-MG) pattern can be configured with a Pre-MG pattern via RRC signalling [2].

The gap interruption requirements in Section 9.1.2 apply to Pre-MG when Pre-MG is activated, and no gap interruption is expected when Pre-MG is deactivated.

- The requirements apply for NR standalone operation with single carrier and NR CA.

9.1.7.2 Requirements applicability

The requirements related to pre-configured measurement gap apply provided:

- UE indicates support of *preconfiguredUE-AutonomousMeasGap* [2] and/or *preconfiguredNW-ControlledMeasGap* [2], and
- either a single per-UE measurement gap is pre-configured by the network, or one or two per-FR measurement gaps are pre-configured by the network, and
- one of measurement gap patterns among measurement gap patterns #0 ~ #25 is configured for pre-configured measurement gap, and
- UE is in NR SA with single carrier or with NR CA.

A measurement gap is configured as pre-configured measurement gap if *preConfigInd* is indicated by network in the configuration message of the measurement gap.

If UE indicates support of only *preconfiguredNW-ControlledMeasGap* [2], UE can expect the network to configure *preConfGapStatus*.

If a measurement gap is configured as pre-configured measurement gap, the applicability of measurement gap patterns is defined in Table 9.1.2-3.

When a pre-configured measurement gap is used to perform PRS measurements, the UE will inform the network that it is going to start/stop PRS measurements with the configured pre-configured measurement gap by initiating the existing *LocationMeasurementIndication* procedure.

If the Pre-MG status changes during a measurement period of a measurement that can be performed without and within measurement gaps, the UE is allowed to restart the measurement.

If the Pre-MG status changes from activated to deactivated during a measurement period of a measurement that can only be performed within measurement gaps, the measurement requirements do not apply.

9.1.7.3 Requirements

Any of the measurement Gap pattern #0 to #25 defined in Table 9.1.2-1 can be configured as Pre-MG pattern.

The UE can determine the Pre-MG status based on autonomous activation/deactivation mechanism or based on network-controlled activation/deactivation mechanism.

A UE capable of both autonomous and network-controlled mechanisms for activation/deactivation of Pre-MG pattern will not use autonomous rules to determine the activation/deactivation status of the pre-configured MG if the network provides the activation/deactivation status via RRC indication *preConfGapStatus* for all the DL BWPs of all the activated CCs, and for all the deactivated SCCs.

9.1.7.3.1 Requirements for autonomous activation/deactivation mechanism

Requirements in this section apply when autonomous mechanism [2] is used for activation/deactivation of Pre-MG pattern.

The UE can autonomously change the Pre-MG status from activation to deactivation or vice versa based on any of the following triggering conditions listed below. The UE shall also autonomously determine the Pre-MG status based on all the concurrent triggering conditions occurring jointly:

- DCI, timer or RRC based active BWP switching,
- Activation/deactivation of SCell(s),
- Addition/removal of any measurement object(s)
- Addition/release/change of a SCell in carrier aggregation,

The UE shall autonomously determine the status of the per-UE Pre-MG pattern as deactivated immediately after the configuration of the per-UE Pre-MG pattern or when any of the triggering conditions above is satisfied provided that all

the configured measurements can be performed without measurement gaps. The UE shall autonomously determine the status of the per-FR Pre-MG pattern as deactivated immediately after the configuration of the per-FR Pre-MG pattern or when any of the triggering conditions above is satisfied provided that all the configured measurements in the same FR can be performed without measurement gaps.

A measurement can be performed by the UE without measurement gaps if any of the following conditions is met:

- The UE is configured with SSB based intra-frequency measurements, and the conditions defined for SSB based intra-frequency measurement without gaps in Clause 9.2.1 are met, or
- The UE is configured with SSB based inter-frequency measurements, and the conditions defined for SSB based inter-frequency measurement without gaps in Clause 9.3.1 are met, or
- The UE is configured with CSI-RS based intra-frequency measurements.

The UE shall autonomously determine the status of the per-UE Pre-MG pattern as activated immediately after the configuration of the per-UE Pre-MG pattern or when any of the triggering conditions above is satisfied provided that at least one of the configured measurements cannot be performed without measurement gaps. The UE shall autonomously determine the status of the per-FR Pre-MG pattern as activated immediately after the configuration of the per-FR Pre-MG pattern or when any of the triggering conditions above is satisfied provided that at least one of the configured measurements in the same FR cannot be performed without measurement gaps.

A measurement cannot be performed by the UE without measurement gaps if any of the following conditions is met:

- The UE is configured with SSB based intra-frequency measurements, and the conditions defined for SSB based intra-frequency measurement without gaps in Clause 9.2.1 are not met, or
- The UE is configured with SSB based inter-frequency measurements, and the conditions defined for SSB based inter-frequency measurement without gaps in Clause 9.3.1 are not met, or
- The UE is configured with any of the following measurements:
 - CSI-RS based inter-frequency measurements, or
 - E-UTRA Inter-RAT measurements, or
 - UTRA Inter-RAT measurements.

9.1.7.3.2 Requirements for network-controlled activation/deactivation mechanism

The requirements in this section apply when network-controlled mechanism [2] is used for activation/deactivation of Pre-MG pattern.

For per-UE Pre-configured MG,

- the UE determines that the Pre-configured MG is activated if *preConfGapStatus* is set to '1' for the corresponding gap ID for the active DL BWP of any of the activated CCs, or if *preConfGapStatus* is set to '1' for the corresponding gap ID for any of the deactivated SCCs,
- otherwise, the UE determines that the Pre-configured MG is deactivated

For per-FR Pre-configured MG,

- the UE determines that the Pre-configured MG is activated if *preConfGapStatus* is set to '1' for the corresponding gap ID for the active DL BWP of any of the activated CCs in the corresponding FR, or if *preConfGapStatus* is set to '1' for the corresponding gap ID for any of the deactivated SCCs in the corresponding FR,
- otherwise, the UE determines that the Pre-configured MG is deactivated

9.1.7.3.3 Requirements for reception/transmission during activation/deactivation

The requirements in this section apply when autonomous mechanism or network-controlled mechanism is used for activation/deactivation [2] of Pre-MG pattern.

If per-UE Pre-MG pattern is activated then the UE is not required to conduct reception/transmission from/to the corresponding serving cells during the gap occasion according to the same principles as described for per-UE measurement gaps in clause 9.1.2. Otherwise, the UE can be scheduled for reception/transmission of signals in all the serving cells during the gap occasion.

If per-FR Pre-MG pattern is activated then the UE is not required to conduct reception/transmission from/to the corresponding serving cells during the gap occasion on the same FR according to the same principles as described for per-FR measurement gaps in clause 9.1.2. Otherwise, the UE can be scheduled for reception/transmission of signals in all the serving cells during the gap occasion in the same FR.

9.1.8 Concurrent measurement gaps

9.1.8.1 Introduction

When UE supports concurrent measurement gap pattern capability, network can provide multiple measurement gaps configured by RRC message(s) as specified in TS 38.331 [2]. Requirements in this section apply when the UE is in SA operation mode.

9.1.8.2 Requirements

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells and/or inter-RAT E-UTRAN cells, and the UE supports *concurrentPerUE-OnlyMeasGap-r17* as specified in [14], in order for the requirements in the following clauses to apply, the network can provide at most two per-UE measurement gap patterns for monitoring of all frequency layers.

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells and/or inter-RAT E-UTRAN cells, and the UE supports *concurrentPerUE-PerFRCombMeasGap-r17* as specified in [14], in order for the requirements defined for concurrent measurement gaps to apply, the network can provide the measurement gap pattern combinations specified in Table 9.1.8-1 for monitoring of all frequency layers.

Table 9.1.8-1: The number of Gap Combination Configurations by UE supporting both concurrent measurement gap patterns and independent measurement gap patterns

Gap Combination Configuration Id	The number of simultaneous configured measurement gap patterns		
	Per-FR1 measurement gap	Per-FR2 measurement gap	Per-UE measurement gap
0	2	1	0
1	1	2	0
2	0	0	2
3 ^{Note 1}	1	0	1
4 ^{Note 1}	0	1	1
5 ^{Note 1}	1	1	1
6	2	0	0
7	0	2	0
Note 1: Gap Combination Configuration Id #3, #4, #5 will be only applied when the per-UE measurement gap is associated to measure PRS for any RSTD, PRS-RSRP, UE Rx-Tx time difference and PRS-RSRPP measurement defined in TS 38.215 [4]. Note 2: In Gap Combination Configuration Id #0, #1, #6, #7, one per-FR measurement gap in an FR can be associated to measure PRS for any RSTD, PRS-RSRP, UE Rx-Tx time difference and PRS-RSRPP measurement defined in TS			

38.215 [4] provided that UE supports
independentGapConfigPRS-r17

For UE configured in the SA operation mode, when monitoring of multiple inter-RAT E-UTRAN carrier frequency layers, intra-frequency NR carrier frequency layers and/or inter-frequency NR carrier frequency layers as configured by PCell using gaps, each monitored carrier frequency layer, including following measurement types:

- a measurement object with SSB based measurement,
- a measurement object with CSI-RS based measurement,
- E-UTRA inter-RAT measurement object,
- E-UTRAN inter-RAT RSTD measurement,
- NR PRS-based positioning measurements,

can be only associated to one measurement gap pattern. Requirements for concurrent measurement gaps apply provided that each frequency layer is only associated with one concurrent measurement gap. There can be one or more frequency layers associated with each concurrent measurement gap. Furthermore, if the UE is not capable of concurrentMeasGapEUTRA-r17[2], all E-UTRAN measurement objects shall be associated with a single concurrent gap pattern for the requirement to apply.

When UE supports concurrent measurement gap patterns, each measurement gap pattern supported by the UE is listed in Table 9.1.2-1 based on the applicability specified in table 9.1.2-3.

The requirements in clause 9.1.2 are also applicable for the UE capable of and configured with multiple concurrent measurement gap patterns within each measurement gap pattern.

When UE supports concurrent measurement gap patterns and configured with more than 1 measurement gap pattern Per FR or Per-UE according to table 9.1.8-1, requirements does not apply if the UE is configured with more than one measurement gap pattern (MGP) with measurement gap repetition period (MGRP) of 20ms in an FR.

9.1.8.3 Collision between concurrent measurement gaps

Collisions between occasions of two concurrent measurement gaps may occur as specified in this clause if the two measurement gaps are

- two per-UE measurement gaps, or
- two per-FR measurement gaps in the same FR, or
- one per-UE measurement gap and one per-FR measurement gap.

When UE is configured with concurrent measurement gaps, two measurement gap occasions are considered colliding if at least one of the following conditions is met:

- the two occasions are fully or partially overlapping in time domain, or
- the distance between the two occasions is equal to or smaller than 4ms.

The distance between two measurement gap occasions is defined as the time difference between the ending point of the first occasion and the starting point of the second occasion, where the first measurement gap occasion occurs earlier in time than the second measurement gap occasion.

In case of collision between two measurement gap occasions, the UE shall perform measurements in the occasion of the measurement gap with higher priority, and the occasion of the measurement gap with lower priority shall be dropped. The UE shall be able to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI in the corresponding NR serving cells in the slots that are not interrupted according to requirements in clause 9.1.8.4.

The requirements of concurrent measurement gaps in section 9 shall not apply when a gap without assigned priority is configured simultaneously with any other gap(s) that affect serving carriers in the same FR and the measurement gaps are colliding with each other.

The priority for a measurement gap is configured by networks via *gapPriority* in *GapConfig*. The requirements with concurrent measurement gaps apply provided that two measurement gaps colliding with each other are configured with different priorities.

9.1.8.4 Measurement gap related requirements of concurrent measurement gaps

A slot is considered as interrupted if it is interrupted by an occasion of any of the configured concurrent measurement gaps following the measurement gap interruption requirements in clause 9.1.2, except for a dropped measurement gap occasion.

9.1.9 Network controlled small gap

9.1.9.1 Introduction

The UE capable of network controlled small gap (NCSG) pattern can be configured with a NCSG pattern via RRC signalling [2].

This clause contains the general requirements on the UE regarding to Network Controlled Small Gap (NCSG).

The requirements in this clause are applicable for UE configured with SA NR (with single carrier or NR CA) operation mode.

It is up to UE implementation whether or not the UE is able to conduct transmission in the following slot(s),

- when *mgta* is not applied, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after the last each of the interrupted slots after VIL1 and VIL2.
- when *mgta* is applied and the SCS of the UL carrier is other than 15kHz, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after the last each of the interrupted slots after VIL1 and VIL2.
- when *mgta* is applied and the SCS of the UL carrier is 15kHz, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after the slot partially overlapped with each of the interrupted slots after VIL1 and VIL2.

where UL slot denotes that all the symbols in the slot are uplink symbols, and $L=1$ if $(N_{TA} + N_{TA\ offset}) \times T_c$ for the UL transmission is less than the length of one slot; $L=2$ otherwise.

Note: Network is supposed to take into account the possible difference between the estimated TA at network and actual TA at UE when scheduling UE in the above slot(s).

The interruptions of NCSG in number of slots are listed in Table 9.1.9-1 on all serving cells when per-UE NCSG is configured with pattern #0-11 or on FR1 serving cells when per-FR FR1 NCSG is configured to *ncsg-MeasGapPerFR-r17* capable UE. The interruptions of NCSG in number of slots are listed in Table 9.1.9-2 on all serving cells when per-UE NCSG is configured with pattern #12-23 or on FR2 serving cells when per-FR FR2 NCSG is configured to *ncsg-MeasGapPerFR-r17* capable UE. There are two interruptions in each NCSG occasion, VIL1 before ML and VIL2 after ML, in NR standalone (with single carrier or NR CA). Each of them has number of interrupted slots captured in Table 9.1.9-1 and Table 9.1.9-2.

Table 9.1.9-1: Number of interrupted slots on all serving cells for per-UE NCSG pattern #0-11 or FR1 serving cells for per-FR FR1 NCSG during each VIL in NR standalone operation (with single carrier, NR CA)

NR	Number of interrupted slots on serving cells
----	--

SCS (kHz)	When MG timing advance of 0ms is applied
	VIL=1ms
15	1
30	2
60	4
120	8
NOTE 1: NR SCS of 120 kHz is only applicable to the case with per-UE NCSG.	
NOTE 2: Void	

Table 9.1.9-2: Number of interrupted slots on all serving cells for per-UE NCSG pattern #12-23 or FR2 serving cells for per-FR FR2 NCSG during each VIL in NR standalone operation (with single carrier, NR CA)

NR SCS (kHz)	Number of interrupted slots on serving cells	
	When MG timing advance of 0ms is applied	When MG timing advance of 0.75ms is applied
	VIL=0.75ms	VIL=0.75ms
60	3	3
120	6	6
NOTE 1: Void		

9.1.9.2 Requirements applicability

Requirements in clause 9.1.9 apply for UE capable of NCSG in standalone NR in both FR1 and FR2 (including FR1+FR2 CA), provided UE is configured with only NCSG and no other measurement gap is configured, and UE is configured with

- SSB based intra-frequency measurement (including measurement on de-activated SCC and measurement on dormant SCell), and/or
- SSB based inter-frequency measurement, and/or
- Inter-RAT E-UTRAN measurement.

Requirements for the following measurements do not apply if UE is configured with NCSG.

- CSI-RS based intra-frequency measurement when overlapped with NCSG, or
- CSI-RS based inter-frequency measurement, or
- Inter-RAT GSM measurement, or
- Inter-RAT UTRAN measurement, or
- PRS measurement.

9.1.9.3 Requirements

The UE shall support NCSG patterns defined in Table 9.1.9.3-1 that are relevant to the UE's measurement capabilities. ML is the measurement length. During the VIL1 and VIL2, the UE is not expected to transmit and receive any data. Where, VIL1 is the visible interruption length before the ML and VIL2 is the visible interruption length after the ML. During ML, whether the UE shall transmit and receive data on the corresponding serving carrier(s) depends on the scheduling restriction requirements specified in clauses 9.2.7.3, 9.3.10.3, 9.4.2.5 and 9.4.3.5. The NCSG parameters VIL1, ML, VIL2 and VIRP are illustrated in Figure 9.1.9.3-1. The applicability of the NCSG patterns in Table 9.1.9.3-1 is specified in Table 9.1.9.3-2..

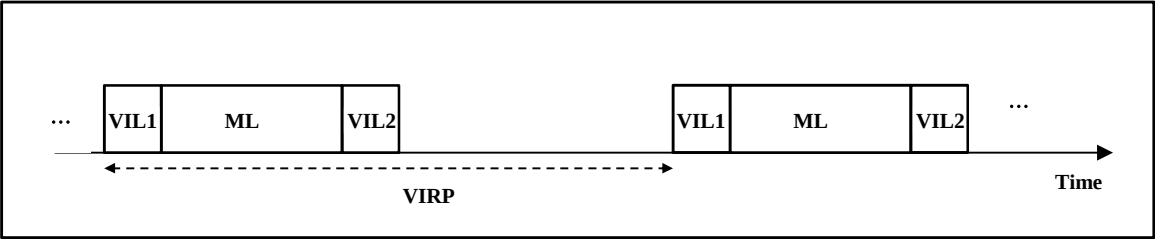


Figure 9.1.9.3-1: Illustration of NCSG parameters: VIL1, ML, VIL2 and VIRP

Table 9.1.9.3-1: NCSG Configurations supported by the UE

NCSG Pattern Id	Measurement Length during which there is no gap (ML, ms)	Visible interruption Repetition Period (VIRP, ms)
0	5	40
1	5	80
2	2	40
3	2	80
4	5	20
5	5	160
6	3	20
7	3	40
8	3	80
9	3	160
10	2	20
11	2	160
12	5	20
13	5	40
14	5	80
15	5	160
16	3	20
17	3	40
18	3	80
19	3	160
20	1	20
21	1	40
22	1	80
23	1	160

Table 9.1.9.3-2: Applicability for NCSG pattern configurations supported by the UE for NR standalone operation with single carrier or NR CA configuration

NCSG pattern configuration	Serving cell	Measurement Purpose ^{NOTE 2}	Applicable NCSG Pattern Id
Per-UE NCSG	FR1, or FR1 + FR2	E-UTRA	0,1,2,3
		FR1 and/or FR2	0-11
		E-UTRA and FR1 and/or FR2	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2	E-UTRA only	0,1,2,3
		FR1 only	0-11
		FR1 and FR2	0-11
		E-UTRA and FR1 and/or FR2	0, 1, 2, 3, 4, 6, 7, 8,10
		FR2 only	12-23
	FR1 if configured	E-UTRA only	0,1,2,3
	FR2 if configured		No gap
	FR1 if configured		0-11
	FR2 if configured		No gap

Per-FR NCSG	FR1 if configured	FR2 only	No gap
	FR2 if configured		12-23
	FR1 if configured	E-UTRA and FR1	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		No gap
	FR1 if configured	FR1 and FR2	0-11
	FR2 if configured		12-23
	FR1 if configured	E-UTRA and FR2	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		12-23
	FR1 if configured	E-UTRA and FR1 and FR2	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		12-23

NOTE 1: When E-UTRA inter-RAT RSTD measurements are configured and the UE requires NCSG for performing such measurements, only NCSG Pattern #0 can be used.

NOTE 2: Measurement purpose which includes E-UTRA measurements includes also inter-RAT E-UTRA RSRP and RSRQ measurements for E-CID.

NOTE 3: If per-UE NCSG is configured with MG timing advance of T_{MG} ms, the NCSG starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured NCSG among all serving cells subframes.

If per-FR NCSG for FR1 is configured with MG timing advance of T_{MG} ms, the NCSG for FR1 starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured NCSG among serving cells subframes in FR1.

If per-FR NCSG for FR2 is configured with MG timing advance of T_{MG} ms, the NCSG for FR2 starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured NCSG among serving cells subframes in FR2.

T_{MG} is the MG timing advance value provided in *mgta* according to [2].

In determining the NCSG starting point, UE shall use the DL timing of the latest subframe occurring immediately before the configured NCSG among serving cells.

NOTE 4: For UE only supporting *nscg-MeasGapNR-Patterns-r17* for any NCSG patterns among NCSG pattern # 2-11, the corresponding NCSG patterns are not applicable to measurement of E-UTRA.

9.1.10 MUSIM gaps

If the UE requires gap patterns for MUSIM purpose, such as cell identification and measurement, paging monitoring, SIB acquisition, and/or on-demand SI request of the target cell in the target network, then the network may provide one or more per-UE MUSIM gap pattern(s) for concurrent monitoring of all frequency layers for MUSIM via *MUSIM-GapConfig* [2]. The UE can be configured with no more than three periodic MUSIM gap patterns and/or one aperiodic MUSIM gap pattern for MUSIM via *MUSIM-GapConfig* [2]. The MUSIM gap patterns specified in Table 9.1.10-1 are applicable only for MUSIM operation.

The UE is not required to perform cell identification and measurement, paging monitoring, SIB acquisition, and/or on-demand SI request of the target cell in the target network that is outside the MUSIM gaps.

The UE is not required to conduct reception or transmission from or to the network during MUSIM gaps.

UE supporting MUSIM capability shall support the MUSIM gap patterns listed in Table 9.1.10-1 based on UE's capability specified in TS38.306[14] and the applicability specified in Table 9.1.10-2.

UE determines MUSIM gap timing based on gap offset configuration from serving cell provided by higher layer signalling as specified in TS 38.331 [2].

Table 9.1.10-1: MUSIM Gap Pattern Configurations

MUSIM Gap Pattern Id	MUSIM Gap Length (MGL, ms)	MUSIM Gap Repetition Period (MGRP, ms)
0	6	40
1	6	80
2	3	40
3	3	80
4	6	20
5	6	160
6	4	20
7	4	40
8	4	80
9	4	160

10	3	20
11	3	160
12	10	80
13	20	160
14	6	320
15	6	640
16	6	1280
17	6	2560
18	10	320
19	10	640
20	10	1280
21	10	2560
22	20	320
23	20	640
24	20	1280
25	20	2560
26	20	5120
27	10	NA
28	20	NA
Note 1: Measurement gap pattern #27, #28 are the aperiodic gap pattern without MGRP.		

Table 9.1.10-2: Applicability for MUSIM Gap Pattern Configurations supported by the UE with NR standalone operation (with single carrier, NR CA configuration)

MUSIM gap pattern configuration	Serving cell	Gap Purpose	Applicable MUSIM Gap Pattern Id
Per-UE MUSIM gap	FR1, FR2, or FR1 + FR2	MUSIM ^{Note1}	0-13, 14-26, 27, 28
NOTE 1: Inclusion of MUSIM procedures for per-UE MUSIM gaps only in NR single carrier, NR CA mode: MUSIM purpose which includes cell identification and measurement, paging monitoring, SIB acquisition, and/or on-demand SI request of the target cell in the target network.			

9.1.11 UL gap for Tx power management

The UL gap patterns for TX power management are listed in Table 9.1.11-1 if UE supports the UL gap for Tx power management, and the UE shall support at least one of UL MGP#1 and UL MGP#3. All other UL MGPs are optional.

Table 9.1.11-1: UL Gap Pattern Configurations

	UL Gap Length (UGL) [ms]	UL gap repetition periodicity (UGRP) [ms]
UL MGP #0	1.0	20
UL MGP #1	1.0	40
UL MGP #2	0.5	160
UL MGP #3	0.125 when SCS of active UL BWP =120kHz 0.25 when SCS of active UL BWP =60kHz	5

An uplink gap consists of consecutive static UL slot(s) in one or more *TDD-UL-DL-Pattern* duration, starting from the first static UL slot of an UL gap repetition period. UGL is the aggregated length of consecutive UL slots used as the UL gap within an UL gap repetition period. That means, there can be a DL slot and/or special slot but no static UL slot between the two consecutive static UL slots within the UL gap length.

When an UL gap overlaps with an uplink transmission in NR serving cells in FR2 single CC or FR2 intra-band CA or FR2 inter-band CA where UE does not support tx-Support-UL-GapFR2-r17, then the UE is not required to conduct any transmission during the UL gap on the NR serving cells other than those listed in Clause 5.30 in TS 38.321 [7].

9.1A General measurement requirement for RedCap

9.1A.1 Introduction

This clause contains general requirements on the RedCap UE regarding measurement reporting in RRC_CONNECTED state. The requirements are split in intra-frequency, inter-frequency, inter-RAT E-UTRAN FDD, inter-RAT E-UTRAN TDD, and L1-RSRP measurements requirements. These measurements may be used by the NG-RAN. The measurement quantities are defined in TS38.215 [4], the measurement model is defined in TS38.300 [10], TS37.340 [17] and measurement accuracies are specified in clause 10. Control of measurement reporting is specified in TS 38.331 [2].

The SSB and SMTC in this section applies for both CD-SSB and NCD-SSB if it is not additional specified.

9.1A.2 Measurement gap

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells and/or inter-RAT E-UTRAN cells, and the UE does not support independent measurement gap patterns for different frequency ranges as specified in Table 5.1-1 in [18, 19, 20], in order for the requirements in the following clauses to apply the network must provide a single per-UE measurement gap pattern for concurrent monitoring of all frequency layers.

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells and/or inter-RAT E-UTRAN cells, and the UE supports independent measurement gap patterns for different frequency ranges as specified in Table 5.1-1 in [18, 19, 20], in order for the requirements in the following clauses to apply the network must provide either per-FR measurement gap patterns for frequency range where UE requires per-FR measurement gap for concurrent monitoring of all frequency layers of each frequency range independently, or a single per-UE measurement gap pattern for concurrent monitoring of all frequency layers of all frequency ranges.

During the per-UE or per-FR measurement gaps the UE:

- is not required to conduct reception/transmission from/to the corresponding NR serving cell for SA (with single carrier) except the reception of signals used for RRM measurement(s), and the signals used for random access procedure according to [7].

UEs shall support the measurement gap patterns listed in Table 9.1A.2-1 based on the applicability specified in Table 9.1A.2-2. UE determines measurement gap timing based on gap offset configuration and measurement gap timing advance configuration provided by higher layer signalling as specified in TS 38.331 [2] and TS 36.331 [16].

Table 9.1A.2-1: Gap Pattern Configurations

Gap Pattern Id	Measurement Gap Length (MGL, ms)	Measurement Gap Repetition Period (MGRP, ms)
0	6	40
1	6	80
2	3	40
3	3	80
4	6	20
5	6	160
6	4	20
7	4	40
8	4	80
9	4	160
10	3	20
11	3	160
12	5.5	20
13	5.5	40
14	5.5	80
15	5.5	160
16	3.5	20
17	3.5	40


18	3.5	80
19	3.5	160
20	1.5	20
21	1.5	40
22	1.5	80
23	1.5	160

Table 9.1A.2-2: Applicability for Gap Pattern Configurations supported by the RedCap UE with NR standalone operation (with single carrier)


Measurement gap pattern configuration	Serving cell	Measurement Purpose	Applicable Gap Pattern Id
Per-UE measurement gap	FR1	non-NR RAT ^{NOTE2}	0,1,2,3
		FR1 and/or FR2	0-11
		non-NR RAT and FR1 and/or FR2 ^{NOTE2}	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2	non-NR RAT only ^{NOTE2}	0,1,2,3
		FR1 only	0-11
		FR1 and FR2	0-11
		non-NR RAT and FR1 and/or FR2 ^{NOTE2}	0, 1, 2, 3, 4, 6, 7, 8,10
		FR2 only	12-23
Per-FR measurement gap	FR1 if configured	non-NR RAT only ^{NOTE2}	0,1,2,3
	FR2 if configured		No gap
	FR1 if configured	FR1 only	0-11
	FR2 if configured		No gap
	FR1 if configured	FR2 only	No gap
	FR2 if configured		12-23
	FR1 if configured	non-NR RAT and FR1 ^{NOTE2}	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		No gap
	FR1 if configured	FR1 and FR2	0-11
	FR2 if configured		12-23
	FR1 if configured	non-NR RAT and FR2 ^{NOTE2}	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		12-23
	FR1 if configured	non-NR RAT and FR1 and FR2 ^{NOTE2}	0, 1, 2, 3, 4, 6, 7, 8,10
	FR2 if configured		12-23
NOTE1: If per-UE measurement gap is configured with MG timing advance of T_{MG} ms, the measurement gap starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured measurement gap among all serving cells subframes. If per-FR measurement gap for FR1 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR1 starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured measurement gap among serving cells subframes in FR1. If per-FR measurement gap for FR2 is configured with MG timing advance of T_{MG} ms, the measurement gap for FR2 starts at time T_{MG} ms advanced to the end of the latest subframe occurring immediately before the configured measurement gap among serving cells subframes in FR2. T_{MG} is the MG timing advance value provided in <i>mgta</i> according to [2]. In determining the measurement gap starting point, UE shall use the DL timing of the latest subframe occurring immediately before the configured measurement gap among serving cells. NOTE 2: In RedCap, non-NR RAT means E-UTRA only. NOTE 3: For UE only supporting <i>supportedGapPattern-NRonly</i> for any gap patterns among GP2-11, the corresponding gap patterns are not applicable to measurement of non-NR RAT as defined in NOTE 2			

If measurement gap is configured in one FR but measurement object is not configured in the FR, the scheduling opportunity in the FR depends on the configured measurement gap pattern.

For NR standalone operation (with single carrier), if UE is not capable of per-FR-gap, total interruption time on a serving cell during MGL is defined when $MGL(N) = 6\text{ms}, 5.5\text{ms}, 4\text{ms}, 3.5\text{ms}, 3\text{ms}, \text{ and } 1.5\text{ms}$. And if UE is capable of per-FR-gap, total interruption time on FR1 serving cell during MGL is defined only when $MGL(N) = 6\text{ms}, 4\text{ms}, \text{ and } 3\text{ms}$, and total interruption time on FR2 serving cell during MGL is defined only when $MGL(N) = 5.5\text{ms}, 3.5\text{ms}, \text{ and } 1.5\text{ms}$.

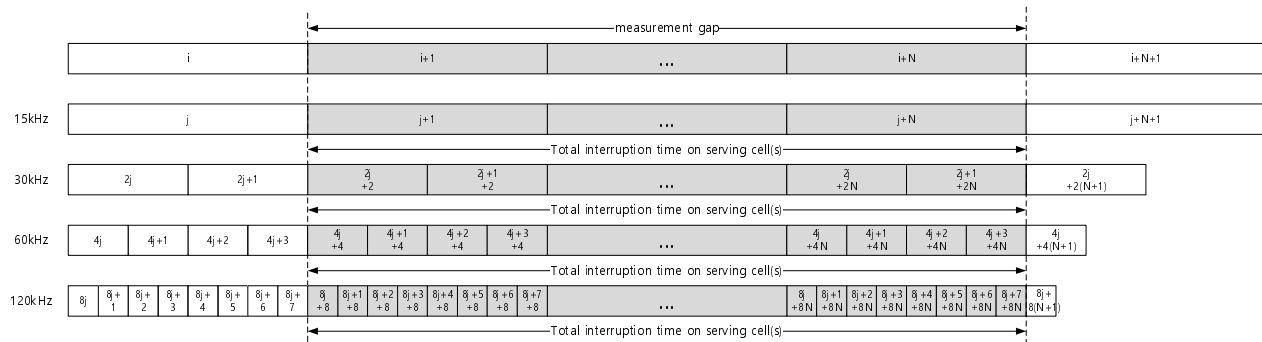

(a) Measurement gap with $MGL = N(\text{ms})$ with MG timing advance of 0ms for serving cell in synchronous NR standalone operation (with single carrier)

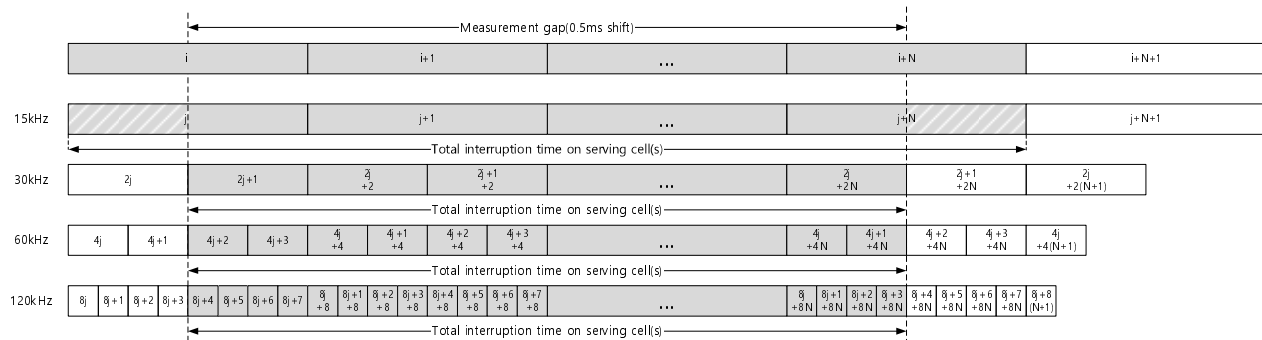

(b) Measurement gap with $MGL = N(\text{ms})$ with MG timing advance of 0.5ms for serving cell in synchronous NR standalone operation (with single carrier)

Figure 9.1A.2-1: Measurement GAP and total interruption time on serving cell for NR standalone operation (with single carrier)

The corresponding total number of interrupted slots on serving cell is listed in Table 9.1A.2-3 for serving cell in NR standalone (with single carrier).

Table 9.1A.2-3: Total number of interrupted slots on serving cell during MGL for NR standalone operation (with single carrier) with per-UE measurement gap or per-FR measurement gap for FR1

NR SCS (kHz)	Total number of interrupted slots on serving cell					
	When MG timing advance of 0ms is applied			When MG timing advance of 0.5ms is applied		
	MGL=6ms	MGL=4ms	MGL=3ms	MGL=6ms	MGL=4ms	MGL=3ms
15	6	4	3	7 ^{Note3}	5 ^{Note3}	4 ^{Note3}
30	12	8	6	12	8	6
60	24	16	12	24	16	12
120	48	32	24	48	32	24

NOTE 1: For Gap Pattern ID 0, 1, 2 and 3, total number of interrupted subframes on serving cell is MGL subframes when MG timing advance of 0ms is applied, and (MGL+1) subframes when MG timing advance of 0.5ms is applied.

NOTE 2: NR SCS of 120 kHz is only applicable to the case with per-UE measurement gap.

NOTE 3: Non-overlapped half-slots occur before and after the measurement gap. Whether a RedCap UE can receive and/or transmit in those half-slots is up to UE implementation.

In case that UE capable of per-FR measurement gap is configured with per-UE measurement gap or per-FR measurement gap for FR2 serving cell, total number of interrupted slots on FR2 serving cells during MGL is listed in Table 9.1A.2-3a.

Table 9.1A.2-3a: Total number of interrupted slots on FR2 serving cell during MGL for NR standalone operation (with single carrier) with per-UE measurement gap or per-FR measurement gap for FR2

NR SCS (kHz)	Total number of interrupted slots on FR2 serving cell					
	When MG timing advance of 0ms is applied			When MG timing advance of 0.25ms is applied		
	MGL= 5.5ms	MGL= 3.5ms	MGL= 1.5ms	MGL= 5.5ms	MGL= 3.5ms	MGL= 1.5ms
60	22	14	6	22	14	6
120	44	28	12	44	28	12
NOTE 1: The total number of interrupted slots is based on that SFN and subframe reference for per-FR gap in FR2 indicated by high layer parameter <i>refServCellIndicator</i> is an FR2 serving cell.						
NOTE 2: Slot occurs before or after the measurement gap may be interrupted additionally if SFN and subframe reference for per-FR gap in FR2 indicated by high layer parameter <i>refServCellIndicator</i> is an FR1 serving cell.						

It is up to UE implementation whether or not the UE is able to conduct transmission in the following slot(s),

- when MGTA is not applied, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after measurement gap
- when MGTA is applied and the SCS of the UL carrier is other than 15kHz, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after measurement gap
- when MGTA is applied and the SCS of the UL carrier is 15kHz, in the L consecutive UL slots with respect to the SCS of the UL carrier with the same slot indices as the DL slots occurring immediately after the slot partially overlapped with measurement gap

where UL slot denotes that all the symbols in the slot are uplink symbols, and $L=1$ if $(N_{TA} + N_{TA\text{ offset}}) \times T_c$ for the UL transmission is less than the length of one slot; $L=2$ otherwise.

9.1A.2.1 SA: Measurement Gap Sharing

For NR standalone UE configured with per-UE measurement gap, measurement gap sharing shall be applies when UE requires measurement gaps to identify and measure cells on an intra-frequency carrier or when SMTC configured for intra-frequency measurement are fully overlapping with per-UE measurement gaps, and when UE requires measurement gaps to identify and measure cells on inter-frequency carriers for SSB based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-UE measurement gaps or per-FR measurement gap, and/or inter-RAT E-UTRAN carriers.

For NR standalone UE configured with per-FR1 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR1 intra-frequency carriers or when SMTC configured for FR1 intra-frequency measurement are fully overlapping with per-FR1 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR1 inter-frequency carriers for SSB based L3 measurement and/or inter-RAT E-UTRAN carriers, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-FR1 measurement gaps.

For NR standalone UE configured with per-FR2 measurement gap, measurement gap sharing shall be applied when UE requires measurement gaps to identify and measure cells on FR2 intra-frequency carriers or when SMTC configured for FR2 intra-frequency measurement are fully overlapping with per-FR2 measurement gaps, and when UE requires measurement gaps to identify and measure cells on FR2 inter-frequency carriers for SSB based L3 measurement, or when all of SMTC configured for inter-frequency SSB based measurement without measurement gaps are fully overlapping with per-UE measurement gaps.

When network signals “01”, “10” or “11” with RRC parameter *MeasGapSharingScheme* [2] and the value of X is defined as in Table 9.1.2.1a-1, and

- $K_{\text{intra}} = 1 / X * 100$,
- $K_{\text{inter}} = 1 / (100 - X) * 100$,

When network signals “00” indicating equal splitting gap sharing, X is not applied.

The RRC parameter *MeasGapSharingScheme* shall be applied to the calculation of carrier specific scaling factor as specified in clause 9.1A.5.2.1.

9.1A.3 UE Measurement capability

9.1A.3.1 SA: Monitoring of multiple layers using gaps

The requirements in this clause are applicable for UE configured with SA NR operation mode.

When monitoring of multiple inter-RAT E-UTRAN carriers and inter-frequency NR carriers with gaps (or without using gaps provided the UE supports such capability or the effective MGRP is applied for per-FR measurement gap capable UE) is configured by PCell, the UE shall be capable of performing one measurement of the configured measurement type (SS-RSRP, SS-RSRQ, SS-SINR, E-UTRAN RSRP, E-UTRAN RSRQ, E-UTRAN RS-SINR measurements, etc.) of detected cells on all the layers.

For UE configured with the NR SA operation, the effective total number of frequencies, excluding the frequencies of the PCell being monitored, is $N_{\text{freq, SA, RedCap}}$, which is defined as:

$$N_{\text{freq, SA, RedCap}} = N_{\text{freq, SA, NR, RedCap}} + N_{\text{freq, SA, E-UTRA, RedCap}},$$

where

$N_{\text{freq, SA, E-UTRA, RedCap}}$ is the number of E-UTRA inter-RAT carriers being monitored (FDD and TDD) as configured by PCell,

$N_{\text{freq, SA, NR, RedCap}}$ is the number of NR inter-frequency carriers being monitored as configured by PCell.

9.1A.3.2 SA: Maximum allowed layers for multiple monitoring

If a UE is configured with SA NR operation mode, the UE shall be capable of monitoring at least:

- Depending on UE capability, 6 NR SSB inter-frequency carriers configured by PCell, and
- Depending on UE capability, 6 E-UTRA TDD inter-RAT carriers configured by PCell, and
- Depending on UE capability, 6 E-UTRA FDD inter-RAT carriers configured by PCell.

In addition to the requirements defined above, the UE shall be capable of monitoring a total of at least [10] effective carrier frequency layers comprising of any above defined combination of NR, E-UTRA FDD, and E-UTRA TDD layers.

If *ssbfrequency*, *smtc1*, *smtc2* and *ssbSubcarrierSpacing* are same in multiple MOs, the multiple MOs are counted as one SSB frequency layer.

9.1A.4 Capabilities for Support of Event Triggering and Reporting Criteria

9.1A.4.1 Introduction

This clause contains requirements on UE capabilities for support of event triggering and reporting criteria. As long as the measurement configuration does not exceed the requirements stated in clause 9.1A.4.2, the UE shall meet all other performance requirements defined in clause 9 and clause 10.

The UE can be requested to make measurements under different measurement identities defined in TS 38.331 [2]. Each measurement identity corresponds to either event-based reporting, periodic reporting, or no reporting. In case of event-based reporting, each measurement identity is associated with an event triggering criterion. In case of periodic reporting, a measurement identity is associated with one periodic reporting criterion. In case of no reporting, a measurement identity is associated with one no reporting criterion.

The purpose of this clause is to set some limits on the number of different event triggering, periodic, and no reporting criteria the UE may be requested to track in parallel.

9.1A.4.2 Requirements

In this clause a reporting criterion corresponds to either one event (in the case of event-based reporting), or one periodic reporting criterion (in case of periodic reporting), or one no reporting criterion (in case of no reporting). For event-based reporting, each instance of event, with the same or different event identities, is counted as separate reporting criterion in Table 9.1A.4.2-1.

The UE shall be able to support in parallel per category up to E_{cat} reporting criteria according to Table [9.1A.4.2-1]. For the measurement categories belonging to intra-frequency, inter-frequency, and inter-RAT measurements (i.e. without counting other categories that the UE shall always support in parallel), the UE need not support more than the total number of reporting criteria as follows:

- For UE configured with SA operation mode: $E_{cat, SA, NR, redCap} + E_{cat, SA, E-UTRA, redCap}$, where

$E_{cat, SA, NR, redCap} = 19$ is the total number of NR reporting criteria according to Table 9.1A.4.2-1,

$E_{cat, SA, E-UTRA, redCap}$ is the total number of inter-RAT E-UTRA reporting criteria according to Table 9.1A.4.2-1.

Table 9.1A.4.2-1: Requirements for reporting criteria per measurement category

Measurement category	E_{cat}	Note
Intra-frequency ^{Note 1}	9	Events for any one or a combination of intra-frequency SS-RSRP, SS-RSRQ, and SS-SINR for NG-RAN intra-frequency cells
Inter-frequency ^{Note 1}	10	Events for any one or a combination of inter-frequency SS-RSRP, SS-RSRQ, and SS-SINR for NG-RAN inter-frequency cells
Inter-RAT (E-UTRA FDD, E-UTRA TDD) ^{Note 1}	10	Only applicable for UE with this (inter-RAT) capability. These reporting criteria apply for any E-UTRA carrier frequencies.
NOTE 1: Applicable for UE configured with SA NR operation mode.		

9.1A.5 Carrier-specific scaling factor

This clause specifies the derivation of carrier-specific scaling factor (CSSF) values, which scales the measurement delay requirements given in clause 9.2B, 9.3B and 9.4A when UE is configured to monitor multiple measurement objects. The CSSF values are categorized into $CSSF_{outside_gap_RedCap,i}$ and $CSSF_{within_gap_RedCap,i}$ for the measurements conducted outside measurement gaps and within measurement gaps, respectively.

9.1A.5.1 Monitoring of multiple layers outside gaps

The carrier-specific scaling factor $CSSF_{outside_gap_RedCap,i}$ for measurement object i derived in this chapter is applied to following measurement types:

- SSB-based intra-frequency measurement with no measurement gap in clause 9.2B.5, when none of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap.
- SSB-based intra-frequency measurement with no measurement gap in clause 9.2B.5, when part of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap.

- SSB-based inter-frequency measurement with no measurement gap in clause 9.3B.7, when none of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap, if UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network.
- SSB-based inter-frequency measurement with no measurement gap in clause [9.3B.7], when part of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap, if UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network.

UE is expected to conduct the measurement of this measurement object *i* only outside the measurement gaps.

If *ssbfrequency*, *smtc1*, *smtc2* and *ssbSubcarrierSpacing* are same in multiple MOs, the multiple MOs are counted as one SSB frequency layer.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, $CSSF_{\text{outside_gap_RedCap},i}$ and requirements derived from $CSSF_{\text{outside_gap_RedCap},i}$ are not specified.

9.1A.5.1.1 SA mode: carrier-specific scaling factor for SSB-based measurements performed outside gaps

For UE in SA operation mode, the carrier-specific scaling factor $CSSF_{\text{outside_gap_RedCap},i}$ for intra-frequency SSB-based measurements, inter-frequency SSB-based measurements performed outside measurements gaps, will be specified as follows:

$CSSF_{\text{outside_gap},i} = 1$, if only one measurement object is configured to be measured outside of MG for RedCap.

$CSSF_{\text{outside_gap},i} = 2$ for intra-frequency measurement, and $CSSF_{\text{outside_gap},i} = 2 \cdot Y$ for inter-frequency measurement with no measurement gap, *Y* is the number of configured inter-frequency MOs without MG that are being measured outside of MG.

If intra-frequency measurement is with measurement gap, $CSSF_{\text{outside_gap},i} = Y$ for inter-frequency measurement with no measurement gap, *Y* is the number of configured inter-frequency MOs without MG that are being measured outside of MG.

9.1A.5.2 Monitoring of multiple layers within gaps

The carrier-specific scaling factor $CSSF_{\text{within_gap_RedCap},i}$ for a measurement object *i* derived in this chapter is applied to following measurement types:

- SSB-based intra-frequency measurement object with no measurement gap in clause 9.2B.5, when all of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap.
- SSB-based intra-frequency measurement object with measurement gap in clause 9.2B.6.
- SSB-based inter-frequency measurement object with measurement gap in clause 9.3B.4.
- SSB-based inter-frequency measurement object without measurement gap for UE capable of *interFrequencyMeas-NoGap* in clause 9.3B.7, when
 - all of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap, or
 - part of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap but the flag *interFrequencyConfig-NoGap-r16* is not configured by the Network- E-UTRA Inter-RAT measurement object in clauses 9.4A.2 and 9.4A.3.

UE is expected to conduct the measurement of this measurement object *i* only within the measurement gaps.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, $CSSF_{\text{within_gap_RedCap},i}$ and requirements derived from $CSSF_{\text{outside_gap_RedCap},i}$ are not specified.

9.1A.5.2.1 SA mode: carrier-specific scaling factor for SSB measurements performed within gaps

When one or more measurement objects are monitored within measurement gaps, the carrier specific scaling factor for a target measurement object with index i is designated as $CSSF_{\text{within_gap_RedCap},i}$ and is derived as described in this clause.

For each measurement gap j count the total number of intra-frequency measurement object and inter-frequency/inter-RAT measurement objects which are candidates to be measured within the gap j .

- An NR measurement object with SSB measurement configured is a candidate to be measured in a gap if its SMTC duration is fully covered by the MGL excluding RF switching time. For intra-frequency NR measurement object, if the higher layer in TS 38.331 [2] signaling of *smtc2* is configured, the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc2*; otherwise the assumed periodicity of SMTC occasions corresponds to the value of higher layer parameter *smtc1*.
- For UEs which support and are configured with per FR gaps, the counting is done on a per FR basis, and for UEs which are configured with per UE gaps the counting is done on a per UE basis.
- $M_{\text{intra_RedCap},i,j}$: Number of intra-frequency measurement objects, which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{intra},i,j}$ equals 0.
- $M_{\text{inter_RedCap},i,j}$: Number of NR inter-frequency layers and EUTRA inter-RAT, which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{inter_RedCap},i,j}$ equals 0.
- $M_{\text{tot_RedCap},i,j} = M_{\text{intra_RedCap},i,j} + M_{\text{inter_RedCap},i,j}$: Total number of intra-frequency, inter-frequency and inter-RAT frequency layers, which are candidates to be measured in gap j where the measurement object i is also a candidate. Otherwise $M_{\text{tot_RedCap},i,j}$ equals 0.

The carrier specific scaling factor $CSSF_{\text{within_gap_RedCap},i}$ is given by:

If *measGapSharingScheme* is equal sharing, $CSSF_{\text{within_gap_RedCap},i} = \max(\text{ceil}(R_i \times M_{\text{tot_RedCap},i,j}))$, where $j=0 \dots (160/\text{MGRP})-1$

If *measGapSharingScheme* is not equal sharing and

- measurement object i is an intra-frequency measurement object, $CSSF_{\text{within_gap_RedCap},i}$ is the maximum among
 - $\text{ceil}(K_{\text{intra}} \times M_{\text{intra_RedCap},i,j})$ in gaps where $M_{\text{inter_RedCap},i,j} \neq 0$, where $j=0 \dots (160/\text{MGRP})-1$
 - $\text{ceil}(M_{\text{intra_RedCap},i,j})$ in gaps where $M_{\text{inter_RedCap},i,j} = 0$, where $j=0 \dots (160/\text{MGRP})-1$
- measurement object i is an inter-frequency or inter-RAT measurement object, $CSSF_{\text{within_gap_RedCap},i}$ is the maximum among
 - $\text{ceil}(K_{\text{inter}} \times M_{\text{inter_RedCap},i,j})$ in gaps where $M_{\text{intra_RedCap},i,j} \neq 0$, where $j=0 \dots (160/\text{MGRP})-1$
 - $\text{ceil}(M_{\text{inter_RedCap},i,j})$ in gaps where $M_{\text{intra_RedCap},i,j} = 0$, where $j=0 \dots (160/\text{MGRP})-1$

9.1A.6 Minimum requirement at transitions

When the measurement on one intra-frequency measurement object transitions from measurements performed outside gaps to measurements performed within gaps or vice versa during one measurement period, the cell identification and measurement period requirements with the longer delay apply.

The carrier-specific scaling factor specified in clause 9.1A.5 that applies to the other impacted measurement objects will also apply based on the longer measurement or cell identification delay before or after the transition.

When the UE transitions between DRX and non-DRX or when DRX cycle periodicity changes, the cell identification and measurement period requirements apply based on the longer delay before or after the transition.

When the intra-frequency measurement transitions from measurements performed on CD-SSB to measurements performed on NCD-SSB or vice versa due to BWP switching during one cell identification period, the UE shall use a

cell identification period that is the maximum of the cell identification periods corresponding to the first SSB type and the second SSB type after the BWP switching.

When the intra-frequency measurement transitions from measurements performed on CD-SSB to measurements performed on NCD-SSB or vice versa due to BWP switching during one measurement period, the UE shall use a measurement period that is the maximum of the measurement periods corresponding to the first SSB type and the second SSB type after the BWP switching.

When the measurement on one measurement object transitions from inter-frequency measurement to intra-frequency measurement or vice versa due to BWP switching during one cell identification period, the UE shall use a cell identification period that is the maximum of the cell identification periods corresponding to the first SSB type and the second SSB type after the BWP switching.

When the measurement on one measurement object transitions from inter-frequency measurement to intra-frequency measurement or vice versa due to BWP switching during one measurement period, the UE shall use a measurement period that is the maximum of the measurement periods corresponding to the first SSB type and the second SSB type after the BWP switching .

Subsequent to the above-mentioned measurement periods and/or cell identification periods, the cell identification and measurement period requirements on each measurement object are based on the SSB type after the BWP switch.

9.1C General measurement requirement for SAN

9.1C.1 Introduction

This clause contains general requirements on the UE regarding measurement reporting in RRC_CONNECTED state. The requirements are split in intra-frequency, inter-frequency and L1-RSRP measurements requirements. These measurements may be used by the NG-RAN. The measurement quantities are defined in TS38.215 [4], the measurement model is defined in TS38.300 [10], TS37.340 [17] and measurement accuracies are specified in clause 10. Control of measurement reporting is specified in TS 38.331 [2].

9.1C.2 Measurement gap

For the UE configured with only PCell, which is served by SAN, if the UE requires measurement gaps to identify and measure cells operating in satellite access network and/or TN cells, in order for the requirements in the following clauses to apply the network must provide at least one per-UE measurement gap and the number of per-UE measurement gaps provided by the network must not exceed the number of measurement gaps supported by the UE, indicated by the capability *parallelMeasurementGap*.

During the per-UE measurement gaps the UE:


- is not required to conduct reception/transmission from/to the PCell except the reception of signals used for RRM measurement(s) and the signals used for random access procedure according to [7].

UEs shall support the measurement gap patterns listed in Table 9.1C.2-1. UE determines measurement gap timing based on gap offset configuration and measurement gap timing advance configuration provided by higher layer signalling as specified in TS 38.331 [2].

Table 9.1C.2-1: Gap Pattern Configurations

Gap Pattern Id	Measurement Gap Length (MGL, ms)	Measurement Gap Repetition Period (MGRP, ms)
0	6	40
1	6	80
2	3	40
3	3	80
4	6	20
5	6	160
6	4	20
7	4	40

8	4	80
9	4	160
10	3	20
11	3	160

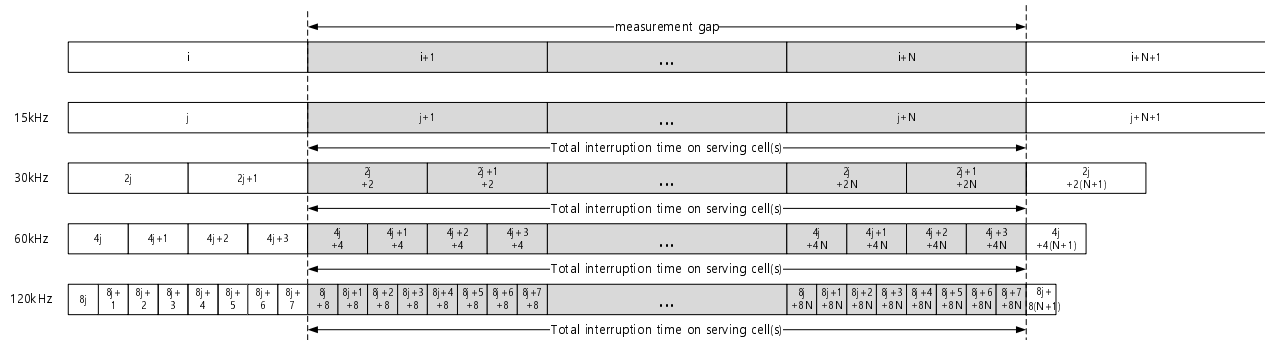

UL slots that are fully or partially overlapping with measurement gap, taking into account TA as defined in clause 7.1C.2, are interrupted.

Note: Network is supposed to take into account the possible difference between the estimated TA at network and actual TA at UE when scheduling UE in the above slot(s).

9.1C.8 Concurrent measurement gaps for SAN

9.1C.8.1 Introduction

When UE supports concurrent measurement gap pattern capability, network can provide multiple measurement gaps configured by RRC message(s) as specified in TS 38.331 [2].

9.1C.8.2 Requirements

If the UE requires measurement gaps to identify and measure intra-frequency cells and/or inter-frequency cells, and the UE supports concurrent measurement gap patterns (*parallelMeasurementGap*), in order for the requirements in the following clauses to apply the network can provide at most two per-UE measurement gap patterns for monitoring of all frequency layers.

For UE configured with the SA operation, when monitoring of multiple intra-frequency and inter-frequency NR carrier frequency layers as configured by PCell using gaps, each monitored carrier frequency layer, including following measurement types:

- a measurement object with SSB based measurement,

can be associated to one or two measurement gap pattern provided the network configures the concurrent measurement gap patterns.

When UE supports concurrent measurement gap patterns, each measurement gap pattern supported by the UE is listed in Table 9.1C.2-1.

The requirements in clause 9.1C.2 are also applicable for the UE capable of and configured with multiple concurrent measurement gap patterns within each measurement gap pattern.

When UE supports concurrent measurement gap patterns and configured with more than 1 per-UE measurement gap patterns, requirements do not apply if the UE is configured with more than one measurement gap pattern (MGP) with measurement gap repetition period (MGRP) of 20ms.

9.1C.8.3 Collision between concurrent measurement gaps

Collisions between occasions of two concurrent measurement gaps may occur as specified in this clause if the two measurement gaps are

- two per-UE measurement gaps, or

When UE is configured with concurrent measurement gaps, two measurement gap occasions are considered colliding if at least one of the following conditions is met:

- the two occasions are fully or partially overlapping in time domain, or
- the distance between the two occasions is equal to or smaller than 4ms.

The distance between two measurement gap occasions is defined as the time difference between the ending point of the first occasion and the starting point of the second occasion, where the first measurement gap occasion occurs earlier in time than the second measurement gap occasion.

If two colliding measurement gaps are not fully overlapping, in case of collision between two measurement gap occasions, the UE shall perform measurements in the occasion of the measurement gap with higher priority, and the

occasion of the measurement gap with lower priority shall be dropped. The UE shall be able to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI in the corresponding NR serving cells in the slots that are not interrupted according to requirements in clause 9.1C.8.4.

If two colliding measurement gaps are fully overlapping with MGRP=160ms, in case of collision between two measurement gap occasions, the UE shall perform measurements in the occasion of one of the measurement gaps, and it is up to UE implementation which occasion is used for measurement, provided that UE can meet the requirements in clause 9.2C and 9.3C.

If two measurement gaps are fully overlapping with MGRP<160ms, no measurement requirements apply.

9.1C.8.4 Measurement gap related requirements of concurrent measurement gaps

A slot is considered as interrupted if it is interrupted by an occasion of any of the configured concurrent measurement gaps following the measurement gap interruption requirements in clause 9.1C.2, except for a dropped measurement gap occasion.

9.1C.9 Collision between SMTC and measurement gap for SAN

9.1C.9.1 Introduction

This clause contains definition of collision between SMTCs and measurement gap for SAN.

9.1C.9.2 Collision between SMTCs and measurement gap

Collision between occasions of SMTC and measurement gap may occur as specified in this clause.

When UE is configured with one or more than one measurement gap pattern, an SMTC occasion outside measurement gap and a measurement gap occasion are considered colliding if at least one of the following conditions is met:

- the SMTC occasion is fully or partially overlapping in time domain with the measurement gap occasion, or
- the magnitude of the distance between the SMTC occasion and the measurement gap occasion in time domain is less than or equals to 4ms.

The distance between a SMTC occasion and a measurement gap occasion is defined as:

- the time difference between the ending point of the SMTC occasion and the starting point of the measurement gap occasion, where the SMTC occasion occurs earlier in time than the MG occasion, or
- the time difference between the ending point of the measurement gap occasion and the starting point of the SMTC occasion, where the measurement gap occasion occurs earlier in time than the SMTC occasion.

9.1C.9.3 Collision between multiple SMTCs on a SAN carrier

Collision between occasions of multiple SMTCs may occur as specified in this clause.

When UE is configured with more than one SMTC on a SAN carrier, two SMTC occasions outside measurement gap are considered colliding if at least one of the following conditions is met:

- the two SMTC occasions are fully or partially overlapping in time domain, or
- the magnitude of the distance between two SMTC occasions in time domain is less than or equals to 4 ms.

The distance between two SMTC occasions is defined as the time difference between the ending point of the earlier SMTC occasion and the starting point of the later SMTC occasion.

9.2 NR intra-frequency measurements

9.2.1 Introduction

A measurement is defined as a SSB based intra-frequency measurement provided the centre frequency of the SSB of the serving cell indicated for measurement and the centre frequency of the SSB of the neighbour cell are the same, and the subcarrier spacing of the two SSBs are also the same.

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified intra-frequency cells if carrier frequency information is provided by PCell or the PSCell, even if no explicit neighbour list with physical layer cell identities is provided.

The UE can perform intra-frequency SSB based measurements without measurement gaps if

- the UE indicates 'no-gap' via *intraFreq-needForGap* for intra-frequency measurement, or
- the SSB is completely contained in the active BWP of the UE, or
- the active downlink BWP is initial BWP[3].

Besides the conditions listed above,

for UE supporting *nr-NeedForGapNCSG-reporting-r17* and indicating *NeedForGapNCSG-InfoNR* for intra-frequency measurement,

- An intra-frequency SSB measurement is defined as measurement without gap if
 - the UE indicates 'nogap-noncsg' via *NeedForGapNCSG-InfoNR* for the intra-frequency measurement, and
 - the SSB is not completely contained in the active BWP of the UE, and
 - the active downlink BWP is not an initial BWP [3].

An intra-frequency SSB measurement is defined as measurement with NCSG if

- the UE indicates 'ncsg' via *NeedForGapNCSG-InfoNR* for the intra-frequency measurement, and
 - the SSB is not completely contained in the active BWP of the UE, and
 - the active downlink BWP is not an initial BWP [3]
- An intra-frequency SSB measurement is defined as measurement with gap if
 - the UE indicates 'gap' via *NeedForGapNCSG-InfoNR* for the intra-frequency measurement, and
 - the SSB is not completely contained in the active BWP of the UE, and
 - the active downlink BWP is not an initial BWP [3]
 - The UE can perform intra-frequency SSB based measurement corresponding to a deactivated SCell or dormant SCell with NCSG.
 - For intra-frequency SSB based measurements with NCSG, UE may cause scheduling restriction as specified in clause 9.2.7.3.

For intra-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in clause 9.2.5.3. SSB based measurements are configured along with one or two measurement timing configuration(s) (SMTC(s)) which provides periodicity, duration and offset information on a window of up to 5ms where the measurements are to be performed. For intra-frequency connected mode measurements, up to two measurement window periodicities may be configured. A single measurement window offset and measurement duration are configured per intra-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB and measure RSSI of RSRQ which start earlier than the gap starting time + switching time, nor detect SSB and measure RSSI of RSRQ which end later than the gap end – switching time. Switching time is 0.5ms for frequency range FR1 and 0.25ms for frequency range FR2.

The requirements in this clause shall also apply, when the UE is configured to perform SRS carrier based switching and using measurement gaps.

The measurement requirements defined for an activated SCell with a non-dormant active BWP defined in this clause shall also apply to an activated SCell with dormant BWP as active BWP.

Editor Note: FFS the scenario when deactivated SCell measurement object is fully overlapping with measurement gap

The intra-frequency measurement requirements in clause 9.2.5 applies for the following scenarios:

- SSB based intra-frequency measurements with no measurement gap,
 - for a UE supporting concurrent gaps and when concurrent gaps are configured:
 - When none of the SMTC occasions of this intra-frequency measurement object are overlapped by the union of concurrent measurement gaps.
 - When part of the SMTC occasions of this intra-frequency measurement object are overlapped by the union of concurrent measurement gaps.
 - otherwise, for a UE not supporting concurrent gaps or if concurrent gaps are not configured:
 - when none of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap.
 - when part of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap.

The intra-frequency measurement requirements in clause 9.2.6 applies for the following scenarios:

- SSB based intra-frequency measurements with measurement gap,
- SSB based intra-frequency measurements with no measurement gap with the following condition,
 - for a UE supporting concurrent gaps and when concurrent gaps are configured:
 - when all of the SMTC occasions of this intra-frequency measurement object are overlapped with the associated measurement gap in the concurrent measurement gaps, or
 - when part of the SMTC occasions of this intra-frequency measurement object are overlapped with the associated measurement gap and all the SMTC occasions of this intra-frequency measurement object are overlapped with the union of concurrent measurement gaps.
 - otherwise, for a UE not supporting concurrent gaps or if concurrent gaps are not configured:
 - when all of the SMTC occasions of this intra-frequency measurement object are overlapped with the measurement gap.
- SSB-based intra-frequency measurement with NCSG, and measurement gap is configured.

The intra-frequency measurement requirements in clause 9.2.7 applies for the following scenarios:

- SSB based intra-frequency measurements without measurement gaps corresponding to an activated serving cell, when all of the SMTC occasions of this intra-frequency measurement object are overlapped by the NCSG;
- SSB-based intra-frequency measurement object corresponding to an activated serving cell (in non-dormancy) when UE supports nr-NeedForGapNCSG-reporting-r17 and indicates 'ncsg' in NeedForGapNCSG-InfoNR for intra-frequency measurement and all or part of the SMTC occasions of this intra-frequency measurement object are overlapped by the NCSG;

SSB-based intra-frequency measurement object corresponding to a deactivated serving cell or to an activated serving cell in dormancy when all or part of the SMTC occasions of this intra-frequency measurement object are overlapped by the NCSG.

9.2.2 Requirements applicability

The requirements in clause 9.2 apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clauses 10.1.2 and 10.1.3 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in clauses 10.1.7 and 10.1.8 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in clauses 10.1.12 and 10.1.13 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.2 for a corresponding Band.

9.2.3 Number of cells and number of SSB

9.2.3.1 Requirements for FR1

For each intra-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 8 identified cells, and
- 14 SSBs with different SSB index and/or PCI on the intra-frequency layer, where the number of SSBs in the serving cell (except for the SCell) is not smaller than the number of configured RLM-RS SSB resources.

9.2.3.2 Requirements for FR2

For one single intra-frequency layer in a band, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 6 identified cells, and
- 24 SSBs with different SSB index and/or PCI,

where this single intra-frequency layer shall be:

- PCC when UE is configured with SA NR operation mode with PCC in the band; or
- PSCC when UE is configured with EN-DC with PSCC in the band; or
- PSCC when UE is configured with NR-DC with PSCC in the band; or
- One of the SCCs on which UE is configured to report SSB based measurements when neither PCC nor PSCC is in the same band, so that the selected SCC shall be an SCC where the UE is configured with SS-RSRP measurement reporting if such SCC exists, otherwise the selected SCC is determined by UE implementation.

The UE shall also be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least 2 SSBs on serving cell for each of the other intra-frequency layer(s) in the same band.

9.2.4 Measurement Reporting Requirements

9.2.4.1 Periodic Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in periodic measurement reports shall meet the requirements in clauses 10.1.2.1 (RSRP for FR1), 10.1.3.1 (RSRP for FR2), 10.1.7.1 (RSRQ for FR1), 10.1.8.1 (RSRQ for FR2), 10.1.12.1 (RS-SINR for FR1) and 10.1.13.1 (RS-SINR for FR2).

9.2.4.2 Event-triggered Periodic Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.1.2.1 (RSRP for FR1), 10.1.3.1 (RSRP for FR2), 10.1.7.1 (RSRQ for FR1), 10.1.8.1 (RSRQ for FR2), 10.1.12.1 (RS-SINR for FR1) and 10.1.13.1 (RS-SINR for FR2).

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.2.4.3.

9.2.4.3 Event Triggered Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.2.1 (RSRP for FR1), 10.1.3.1 (RSRP for FR2), 10.1.7.1 (RSRQ for FR1), 10.1.8.1 (RSRQ for FR2), 10.1.12.1 (RS-SINR for FR1) and 10.1.13.1 (RS-SINR for FR2).

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times T_{\text{TTI}_{\text{DCCH}}}$. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{\text{identify_intra_with_index}}$ or $T_{\text{identify_intra_without_index}}$ defined in clause 9.2.5.1 or clause 9.2.6.2 or clause 9.2.7.1. When L3 filtering is used an additional delay can be expected. In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{\text{identify_intra_without_index}}$ or $T_{\text{identify_intra_with_index}}$ as defined in clause 9.2.5.1 or clause 9.2.6.2 or clause 9.2.7.1. If a cell which has been detectable at least for the time period $T_{\text{identify_intra_without_index}}$ or $T_{\text{identify_intra_with_index}}$ defined in clause 9.2.5.1 or clause 9.2.6.2 or clause 9.2.7.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{\text{SSB_measurement_period_intra}}$ provided the timing to that cell has not changed more than $\pm 3200/2^\mu T_c$ while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected. In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

9.2.5 Intrafrequency measurements without measurement gaps

9.2.5.1 Intrafrequency cell identification

The UE shall be able to identify a new detectable intra-frequency cell within $T_{\text{identify_intra_without_index}}$ if the UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{\text{identify_intra_with_index}}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{\text{identify_intra_without_index}}$. It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2 with SCS smaller or equal to 480 kHz.

$$T_{\text{identify_intra_without_index}} = (T_{\text{PSS/SSS_sync_intra}} + T_{\text{SSB_measurement_period_intra}}) \text{ ms}$$

$$T_{\text{identify_intra_with_index}} = (T_{\text{PSS/SSS_sync_intra}} + T_{\text{SSB_measurement_period_intra}} + T_{\text{SSB_time_index_intra}}) \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_intra}}$: it is the time period used in PSS/SSS detection given in table 9.2.5.1-1, 9.2.5.1-2, 9.2.5.1-4 (deactivated SCell) or 9.2.5.1-5 (deactivated SCell) or 9.2.5.1-9 (deactivated SCell) or 9.2.5.1-11 or 9.2.5.1-12 (deactivated PCell) or 9.2.5.1-13 (deactivated PCell).

- For UE supporting power class 6 with *highSpeedMeasFlagFR2-r17* configured, if $\text{SMTC} \leq 40\text{ms}$, $T_{\text{PSS/SSS_sync_intra}}$ is given in Table 9.2.5.1-11; otherwise, $T_{\text{PSS/SSS_sync_intra}}$ is given in Table 9.2.5.1-2.

$T_{\text{SSB_time_index_intra}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2.5.1-3, 9.2.5.1-15 (FR2-2), 9.2.5.1-6 (deactivated SCell), 9.2.5.1-10 (deactivated SCell) or 9.2.5.1-14 (deactivated PCell).

$T_{\text{SSB_measurement_period_intra}}$: equal to a measurement period of SSB based measurement given in table 9.2.5.2-1, table 9.2.5.2-2 table 9.2.5.2-3 (deactivated SCell), 9.2.5.2-4 (deactivated SCell), 9.2.5.2-5 or 9.2.5.2-6 (deactivated SCell), 9.2.5.2-8 (deactivated PCell) or 9.2.5.2-9 (deactivated PCell).

- For UE supporting power class 6 with *highSpeedMeasFlagFR2-r17* configured, if $\text{SMTC} \leq 40\text{ms}$, $T_{\text{SSB_measurement_period_intra}}$ is given in Table 9.2.5.2-7; otherwise, $T_{\text{SSB_measurement_period_intra}}$ is given in Table 9.2.5.2-2.

$\text{CSSF}_{\text{intra}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{outside_gap},i}$ in clause 9.1.5.1 for measurement conducted outside measurement gaps, i.e. when intra-frequency SMTC is fully non overlapping or partially overlapping with GAP.

For a UE that supports Pre-MG, an SMTC occasion is only considered to be overlapped by Pre-MG if the Pre-MG is activated.

if the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc2*; Otherwise the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

$M_{\text{pss/sss_sync_w/o_gaps}}$: For a UE supporting FR2-1 power class 1 or 5, $M_{\text{pss/sss_sync_w/o_gaps}} = 40$. For a UE supporting power class 2, $M_{\text{pss/sss_sync_w/o_gaps}} = 24$. For a UE supporting FR2-1 power class 3, $M_{\text{pss/sss_sync_w/o_gaps}} = 24$. For a UE supporting FR2-1 power class 4, $M_{\text{pss/sss_sync_w/o_gaps}} = 24$. For a UE supporting FR2-1 power class 6, $M_{\text{pss/sss_sync_w/o_gaps}} = 24$. For a UE supporting FR2-2 power class 1, $M_{\text{pss/sss_sync_w/o_gaps}} = 60$. For a UE supporting FR2-2 power class 2, $M_{\text{pss/sss_sync_w/o_gaps}} = 36$. For a UE supporting FR2-2 power class 3, $M_{\text{pss/sss_sync_w/o_gaps}} = 36$.

$M_{\text{meas_period_w/o_gaps}}$: For a UE supporting FR2-1 power class 1 or 5, $M_{\text{meas_period_w/o_gaps}} = 40$. For a UE supporting FR2-1 power class 2, $M_{\text{meas_period_w/o_gaps}} = 24$. For a UE supporting FR2-1 power class 3, $M_{\text{meas_period_w/o_gaps}} = 24$. For a UE supporting power class 4, $M_{\text{meas_period_w/o_gaps}} = 24$. For a UE supporting FR2-1 power class 6, $M_{\text{meas_period_w/o_gaps}} = 24$. For a UE supporting FR2-2 power class 1, $M_{\text{meas_period_w/o_gaps}} = 60$. For a UE supporting FR2-2 power class 2, $M_{\text{meas_period_w/o_gaps}} = 36$. For a UE supporting FR2-2 power class 3, $M_{\text{meas_period_w/o_gaps}} = 36$.

$M_{\text{SSB_index_intra}}$: For a UE supporting FR2-2 power class 1, $M_{\text{SSB_index_intra}} = 72$ samples. For a UE supporting FR2-2 power class 2, $M_{\text{SSB_index_intra}} = 48$ samples. For a UE supporting FR2 power class 3, $M_{\text{SSB_index_intra}} = 48$ samples.

When UE supports *concurrentMeasGap-r17* and is configured with concurrent measurement gaps,

K_p is the scaling factor for an SSB frequency layer to be measured without measurement gaps. $K_p = N_{\text{total}} / N_{\text{available}}$, where $N_{\text{available}}$ and N_{total} are calculated as follows:

- For a window W of duration $\max(\text{SMTC period}, \text{MGRP}_{\text{max}})$, where MGRP_{max} is the maximum MGRP across all configured per-UE measurement gap and/or per-FR measurement gap within the same FR as the SSB frequency layer, and starting from the beginning of any SMTC occasion:
 - N_{total} is the total number of SMTC occasions within the window, including those overlapped with measurement gap occasions within the window, and
 - $N_{\text{available}}$ is the number of SMTC occasions that are not overlapped with any non-dropped MG occasion within the window W , after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3.

$K_p = 1$ when $N_{\text{available}} = 0$.

Otherwise, when UE is not configured with or UE does not support concurrent measurement gaps:

When intra-frequency SMTC is fully non overlapping with GAP, $K_p=1$

When intra-frequency SMTC is partially overlapping with measurement gaps, $K_p = 1/(1 - (\text{SMTC period} / \text{MGRP}))$, where $\text{SMTC period} < \text{MGRP}$. When intra-frequency SMTC is partially overlapping with NCSG, $K_p = 1/(1 - (\text{SMTC period} / \text{VIRP}))$, where $\text{SMTC period} < \text{VIRP}$. For calculation of K_p , if the high layer signalling (TS 38.331 [2]) of *smtc2* is configured, for cells indicated in the *pci-List* parameter in *smtc2*, the SMTC periodicity corresponds to the value of higher layer parameter *smtc2*; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter *smtc1*. If the higher layer signaling in TS38.331 [2] signalling of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, requirements are not specified for $T_{\text{identify_intra_without_index}}$ OF $T_{\text{identify_intra_with_index}}$.

For FR2,

$K_{\text{layer1_measurement}}=1$,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by intra-frequency SMTC occasions, or
- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by intra-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by the union set of *SSB-ToMeasure* from all the configured measurement objects on the same serving carrier which can be merged. and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{\text{layer1_measurement}}=1.5$, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

If MCG DRX is in use, cell identification requirements for intra-frequency measurement in MCG specified in Table 9.2.5.1-1, Table 9.2.5.1-2, Table 9.2.5.1-3, Table 9.2.5.1-4, Table 9.2.5.1-5 and Table 9.2.5.1-6 shall depend on the MCG DRX cycle. If SCG DRX is in use, cell identification requirements for intra-frequency measurement in SCG specified in Table 9.2.5.1-1, Table 9.2.5.1-2, Table 9.2.5.1-3, Table 9.2.5.1-4, Table 9.2.5.1-5, Table 9.2.5.1-6, Table 9.2.5.1-12, Table 9.2.5.1-13 and Table 9.2.5.1-14 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 9.2.5.1-1: Time period for PSS/SSS detection, (Frequency range FR1)

DRX cycle	$T_{\text{PSS/SSS_sync_intra}}$
No DRX	$\max(600\text{ms}, \text{ceil}(5 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(M2^{\text{Note 2}} \times 5 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(5 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When <i>highSpeedMeasFlag-r16</i> is not configured, $M2 = 1.5$; When <i>highSpeedMeasFlag-r16</i> is configured, $M2 = 1.5$ if SMTC periodicity $> 40\text{ ms}$; otherwise $M2=1$.	
NOTE 3: When <i>highSpeedMeasFlag-r16</i> is configured, the requirements apply only to UE supporting either <i>measurementEnhancement-r16</i> or <i>intraNR-MeasurementEnhancement-r16</i> on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.	
NOTE 4: When <i>highSpeedMeasCA-Scell-r17</i> is configured and UE supports <i>measurementEnhancementCA-r17</i> , $M2 = 1.5$ if SMTC periodicity $> 40\text{ ms}$; otherwise $M2=1$.	

Table 9.2.5.1-2: Time period for PSS/SSS detection, (Frequency range FR2)

DRX cycle	$T_{\text{PSS/SSS_sync_intra}}$
-----------	-----------------------------------

No DRX	$\max(600\text{ms}, \text{ceil}(\text{M}_{\text{pss/sss_sync_w/o_gaps}} \times \text{K}_{\text{FR}} \times \text{K}_{\text{p}} \times \text{K}_{\text{layer1_measurement}}) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(1.5 \times \text{M}_{\text{pss/sss_sync_w/o_gaps}} \times \text{K}_{\text{FR}} \times \text{K}_{\text{p}} \times \text{K}_{\text{layer1_measurement}}) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(\text{M}_{\text{pss/sss_sync_w/o_gaps}} \times \text{K}_{\text{FR}} \times \text{K}_{\text{p}} \times \text{K}_{\text{layer1_measurement}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: K_{FR} is a scaling factor depending on the frequency range and the SSB SCS. For FR2-1, $\text{K}_{\text{FR}} = 1$. For FR2-2: $\text{K}_{\text{FR}} = 1$ if the SCS of the SSB of the cell being detected is 120 kHz, $\text{K}_{\text{FR}} = 2$ if the SCS of the SSB of the cell being detected is 480 kHz, and $\text{K}_{\text{FR}} = 3$ if the SCS of the SSB of the cell being detected is 960 kHz.	

Table 9.2.5.1-3: Time period for time index detection (FR1)

DRX cycle	$\text{T}_{\text{SSB_time_index_intra}}$
No DRX	$\max(120\text{ms}, \text{ceil}(3 \times \text{K}_{\text{p}}) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(120\text{ms}, \text{ceil}(\text{M2}^{\text{Note 2}} \times 3 \times \text{K}_{\text{p}}) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(3 \times \text{K}_{\text{p}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When <i>highSpeedMeasFlag-r16</i> is not configured, $\text{M2} = 1.5$; When <i>highSpeedMeasFlag-r16</i> is configured, $\text{M2} = 1.5$ if SMTC periodicity $> 40\text{ ms}$; otherwise $\text{M2} = 1$	
NOTE 3: When <i>highSpeedMeasFlag-r16</i> is configured, the requirements apply only to UE supporting either <i>measurementEnhancement-r16</i> or <i>intraNR-MeasurementEnhancement-r16</i> on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.	
NOTE 4: When <i>highSpeedMeasCA-Scell-r17</i> is configured and UE supports <i>measurementEnhancementCA-r17</i> , $\text{M2} = 1.5$ if SMTC periodicity $> 40\text{ ms}$; otherwise $\text{M2} = 1$	

Table 9.2.5.1-4: Time period for PSS/SSS detection, deactivated SCell (FR1)

DRX cycle	$\text{T}_{\text{PSS/SSS_sync_intra}}$
No DRX	$\text{Ceil}(5 \times \text{K}_{\text{p}}) \times \text{measCycleSCell} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\text{Ceil}(5 \times \text{K}_{\text{p}}) \times \max(\text{measCycleSCell}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times \text{K}_{\text{p}}) \times \max(\text{measCycleSCell}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
NOTE 1: The requirements also apply to deactivated SCG SCell.	

Table 9.2.5.1-5: Time period for PSS/SSS detection, deactivated SCell (FR2)

DRX cycle	$\text{T}_{\text{PSS/SSS_sync_intra}}$
No DRX	$\text{Ceil}(\text{M}_{\text{pss/sss_sync_w/o_gaps}} \times \text{K}_{\text{p}}) \times \text{measCycleSCell} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\text{Ceil}(\text{M}_{\text{pss/sss_sync_w/o_gaps}} \times \text{K}_{\text{p}}) \times \max(\text{measCycleSCell}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(\text{M}_{\text{pss/sss_sync_w/o_gaps}} \times \text{K}_{\text{p}}) \times \max(\text{measCycleSCell}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
NOTE 1: The requirements also apply to deactivated SCG SCell.	

Table 9.2.5.1-6: Time period for time index detection, deactivated SCell (FR1)

DRX cycle	$\text{T}_{\text{SSB_time_index_intra}}$
No DRX	$\text{Ceil}(3 \times \text{K}_{\text{p}}) \times \text{measCycleSCell} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\text{Ceil}(3 \times \text{K}_{\text{p}}) \times \max(\text{measCycleSCell}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(3 \times \text{K}_{\text{p}}) \times \max(\text{measCycleSCell}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$

NOTE 1: The requirements also apply to deactivated SCG SCell.

Table 9.2.5.1-7: Void

Table 9.2.5.1-8: Void

Table 9.2.5.1-9: Time period for PSS/SSS detection, deactivated SCell (FR1), when *highSpeedMeasCA-Scell-r17* is configured

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	$\text{Ceil}(5 \times K_p) \times \text{measCycleSCell} \times \text{CSSF}_{intra}$
DRX cycle $\leq 320\text{ms}$	$\text{Ceil}(5 \times K_p) \times \max(\text{measCycleSCell}, M2^{\text{Note 1}} \times \text{DRX cycle}) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times K_p) \times \max(\text{measCycleSCell}, \text{DRX cycle}) \times \text{CSSF}_{intra}$

NOTE 1: $M2 = 1.5$ if SMTC periodicity > 40 ms; otherwise $M2=1$

Table 9.2.5.1-10: Time period for time index detection, deactivated SCell (FR1), when *highSpeedMeasCA-Scell-r17* is configured

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	$\text{Ceil}(3 \times K_p) \times \text{measCycleSCell} \times \text{CSSF}_{intra}$
DRX cycle $\leq 320\text{ms}$	$\text{Ceil}(3 \times K_p) \times \max(\text{measCycleSCell}, M2^{\text{Note 1}} \times \text{DRX cycle}) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(3 \times K_p) \times \max(\text{measCycleSCell}, \text{DRX cycle}) \times \text{CSSF}_{intra}$

NOTE 1: $M2 = 1.5$ if SMTC periodicity > 40 ms; otherwise $M2=1$

Table 9.2.5.1-11: Time period for PSS/SSS detection when *highSpeedMeasFlagFR2-r17* is configured, (Frequency range FR2) when SMTC period $\leq 40\text{ms}$

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	$\max(600\text{ms}, \text{ceil}(M1^{\text{Note 2}} \times K_p \times K_{layer1_measurement}) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{intra}$
DRX cycle $\leq 80\text{ms}$	$\max(600\text{ms}, \text{ceil}(M1^{\text{Note 2}} \times K_p \times K_{layer1_measurement}) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{intra}$
$80\text{ms} < \text{DRX cycle} \leq 320\text{ms}$	$\text{ceil}(1.5 \times M_{pss/sss_sync_w/o_gaps}^{\text{Note 3}} \times K_p \times K_{layer1_measurement}) \times \max(\text{SMTC period}, \text{DRX cycle}) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M_{pss/sss_sync_w/o_gaps}^{\text{Note 3}} \times K_p \times K_{layer1_measurement}) \times \text{DRX cycle} \times \text{CSSF}_{intra}$

NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified

NOTE 2: For UE supporting power class 6, $M1 = 6$ if *highSpeedMeasFlagFR2-r17* = set1 or $M1 = 18$ if *highSpeedMeasFlagFR2-r17* = set2

NOTE 3: Void

Table 9.2.5.1-12: Time period for PSS/SSS detection, deactivated PSCell (FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	$\text{Ceil}(5 \times K_p) \times \text{measCyclePSCell} \times \text{CSSF}_{intra}$
DRX cycle $\leq 320\text{ms}$	$\text{Ceil}(5 \times K_p) \times \max(\text{measCyclePSCell}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times K_p) \times \max(\text{measCyclePSCell}, \text{DRX cycle}) \times \text{CSSF}_{intra}$

Table 9.2.5.1-13: Time period for PSS/SSS detection, deactivated PSCell (FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
-----------	----------------------------

No DRX	$\text{Ceil}(M_{\text{pss/sss_sync_w/o_gaps}} \times K_p) \times \text{measCyclePSCell} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\text{Ceil}(M_{\text{pss/sss_sync_w/o_gaps}} \times K_p) \times \max(\text{measCyclePSCell}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(M_{\text{pss/sss_sync_w/o_gaps}} \times K_p) \times \max(\text{measCyclePSCell}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$

Table 9.2.5.1-14: Time period for time index detection, deactivated PSCell (FR1)

DRX cycle	$T_{\text{SSB_time_index_intra}}$
No DRX	$\text{Ceil}(3 \times K_p) \times \text{measCyclePSCell} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\text{Ceil}(3 \times K_p) \times \max(\text{measCyclePSCell}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(3 \times K_p) \times \max(\text{measCyclePSCell}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$

Table 9.2.5.1-15: Time period for time index detection (Frequency range FR2-2)

DRX cycle	$T_{\text{SSB_time_index_intra}}$
No DRX	$\max(200\text{ms}, \text{ceil}(M_{\text{SSB_index_intra}} \times K_p \times \text{SMTC period}) \times \text{CSSF}_{\text{intra}})$
DRX cycle $\leq 320\text{ms}$	$\max(200\text{ms}, \text{ceil}(1.5 \times M_{\text{SSB_index_intra}} \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}})$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(M_{\text{SSB_index_intra}} \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$

9.2.5.2 Measurement period

The measurement period for intra-frequency measurements without gaps is as shown in table 9.2.5.2-1, 9.2.5.2-2, 9.2.5.2-3 (deactivated SCell), 9.2.5.2-4 (deactivated SCell), 9.2.5.2-8 (deactivated SCG applicable for PSCell) or 9.2.5.2-9 (deactivated SCG applicable for PSCell). When *highSpeedMeasFlag-r16* is configured, $T_{\text{SSB_measurement_period_intra}}$ is specified in Table 9.2.5.2-5.

If the higher layer signaling in TS38.331 [2] signalling of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, requirements are not specified for $T_{\text{SSB_measurement_period_intra}}$

For a UE that supports Pre-MG, an SMTC occasion is only considered to be overlapped by Pre-MG if the Pre-MG is activated.

If MCG DRX is in use, measurement period requirements for intra-frequency measurement in MCG specified in Table 9.2.5.2-1, Table 9.2.5.2-2, Table 9.2.5.2-3 and Table 9.2.5.2-4 shall depend on the MCG DRX cycle. If SCG DRX is in use, measurement period requirements for intra-frequency measurement in SCG specified in Table 9.2.5.2-1, Table 9.2.5.2-2, Table 9.2.5.2-3, Table 9.2.5.2-4, Table 9.2.5.2-8 and Table 9.2.5.2-9, shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

For FR2, a longer measurement period is allowed, if aperiodic CSI-RS resource is measured for L1-RSRP measurement on any FR2 serving frequency in the same band, and the CSI-RS resource is outside measurement gap and overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols. If *SSB-ToMeasure* or *SS-RSSI-Measurement* is configured, the SSB symbols are indicated by the union set of *SSB-ToMeasure* from all the configured measurement objects on the same band which can be merged and the RSSI symbols are indicated by *SS-RSSI-Measurement*.

Table 9.2.5.2-1: Measurement period for intra-frequency measurements without gaps (FR1)

DRX cycle	$T_{\text{SSB_measurement_period_intra}}$
No DRX	$\max(200\text{ms}, \text{ceil}(5 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(200\text{ms}, \text{ceil}(1.5 \times 5 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(5 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$

NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified

Table 9.2.5.2-2: Measurement period for intra-frequency measurements without gaps (FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	$\max(400\text{ms}, \text{ceil}(M_{\text{meas_period_w/o_gaps}} \times K_p \times K_{\text{layer1_measurement}}) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(400\text{ms}, \text{ceil}(1.5 \times M_{\text{meas_period_w/o_gaps}} \times K_p \times K_{\text{layer1_measurement}}) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M_{\text{meas_period_w/o_gaps}} \times K_p \times K_{\text{layer1_measurement}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.2.5.2-3: Measurement period for intra-frequency measurements without gaps (deactivated SCell) (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	$\text{Ceil}(5 \times K_p) \times \text{measCycleSCell} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\text{Ceil}(5 \times K_p) \times \max(\text{measCycleSCell}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times K_p) \times \max(\text{measCycleSCell}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
NOTE 1: The requirements also apply to deactivated SCG SCell	

Table 9.2.5.2-4: Measurement period for intra-frequency measurements without gaps (deactivated SCell) (FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	$\text{Ceil}(M_{\text{meas_period_w/o_gaps}} \times K_p) \times \text{measCycleSCell} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\text{Ceil}(M_{\text{meas_period_w/o_gaps}} \times K_p) \times \max(\text{measCycleSCell}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(M_{\text{meas_period_w/o_gaps}} \times K_p) \times \max(\text{measCycleSCell}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
NOTE 1: The requirements also apply to deactivated SCG SCell.	

Table 9.2.5.2-5: $T_{SSB_measurement_period_intra}$ When *highSpeedMeasFlag-r16* and/or *highSpeedMeasCA-Scell-r17* is configured (Frequency range FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX ^{Note 2}	$\max(200\text{ms}, \text{ceil}(5 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 160\text{ms}$	$\max(200\text{ms}, \text{ceil}(5 \times M2^{\text{Note 2}} \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
$160\text{ms} < \text{DRX cycle} \leq 320\text{ms}$	$\text{ceil}(4 \times M2^{\text{Note 2}} \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(Y^{\text{Note 3}} \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: $M2 = 1.5$ if SMTC period $> 40\text{ms}$, otherwise $M2=1$	
NOTE 3: $Y=3$ when SMTC period $\leq 40\text{ms}$, $Y=5$ when SMTC period $> 40\text{ms}$	
NOTE 4: When <i>highSpeedMeasFlag-r16</i> is configured, the requirements apply only to UE supporting either <i>measurementEnhancement-r16</i> or <i>intraNR-MeasurementEnhancement-r16</i> on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.	
NOTE 5: When <i>highSpeedMeasCA-Scell-r17</i> is configured, the requirements apply to measurements of secondary component carrier with active SCell.	

Table 9.2.5.2-6: Measurement period for intra-frequency measurements without gaps (deactivated SCell) (FR1), when highSpeedMeasCA-Scell-r17 is configured

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	$\text{ceil}(5 \times K_p) \times \text{measCycleSCell} \times \text{CSSF}_{intra}$
DRX cycle $\leq 160\text{ms}$	$\text{ceil}(5 \times K_p) \times \max(\text{measCycleSCell}, M2^{\text{Note 1}} \times \text{DRX cycle}) \times \text{CSSF}_{intra}$
$160\text{ms} < \text{DRX cycle} \leq 320\text{ms}$	$\text{ceil}(4 \times K_p) \times \max(\text{measCycleSCell}, M2^{\text{Note 1}} \times \text{DRX cycle}) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(Y^{\text{Note 2}} \times K_p) \times \max(\text{measCycleSCell}, \text{DRX cycle}) \times \text{CSSF}_{intra}$
NOTE 1: $M2 = 1.5$ if SMTC periodicity $> 40\text{ ms}$, otherwise $M2=1$	
NOTE 2: $Y=3$ when SMTC $\leq 40\text{ms}$, $Y=5$ when SMTC $> 40\text{ms}$	

Table 9.2.5.2-7: Measurement period for intra-frequency measurements without gaps when highSpeedMeasFlagFR2-r17 is configured (FR2) when SMTC period $\leq 40\text{ms}$

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	$\max(400\text{ms}, \text{ceil}(M1^{\text{Note 2}} \times K_p \times K_{layer1_measurement}) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{intra}$
DRX cycle $\leq 80\text{ms}$	$\max(400\text{ms}, \text{ceil}(M1^{\text{Note 2}} \times K_p \times K_{layer1_measurement}) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{intra}$
$80\text{ms} < \text{DRX cycle} \leq 320\text{ms}$	$\text{ceil}(1.5 \times M_{\text{meas_period_w/o_gaps}}^{\text{Note 3}} \times K_p \times K_{layer1_measurement}) \times \max(\text{SMTC period}, \text{DRX cycle}) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M_{\text{meas_period_w/o_gaps}}^{\text{Note 3}} \times K_p \times K_{layer1_measurement}) \times \text{DRX cycle} \times \text{CSSF}_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: For UE supporting power class 6, $M1 = 6$ if highSpeedMeasFlagFR2-r17 = set1 or $M1 = 18$ if highSpeedMeasFlagFR2-r17 = set2	

Table 9.2.5.2-8 Measurement period for intra-frequency measurements without gaps (deactivated SCG applicable for PSCell) (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	$\text{Ceil}(5 \times K_p) \times \text{measCyclePSCell} \times \text{CSSF}_{intra}$
DRX cycle $\leq 320\text{ms}$	$\text{Ceil}(5 \times K_p) \times \max(\text{measCyclePSCell}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times K_p) \times \max(\text{measCyclePSCell}, \text{DRX cycle}) \times \text{CSSF}_{intra}$

Table 9.2.5.2-9: Measurement period for intra-frequency measurements without gaps (deactivated SCG applicable for PSCell) (FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	$\text{Ceil}(M_{\text{meas_period_w/o_gaps}} \times K_p) \times \text{measCyclePSCell} \times \text{CSSF}_{intra}$
DRX cycle $\leq 320\text{ms}$	$\text{Ceil}(M_{\text{meas_period_w/o_gaps}} \times K_p) \times \max(\text{measCyclePSCell}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(M_{\text{meas_period_w/o_gaps}} \times K_p) \times \max(\text{measCyclePSCell}, \text{DRX cycle}) \times \text{CSSF}_{intra}$

9.2.5.3 Scheduling availability of UE during intra-frequency measurements

UE shall be capable of measuring without measurement gaps when the SSB is completely contained in the active bandwidth part of the UE. When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols indicated by the union set of SSB-ToMeasure from all the configured measurement objects on the same serving carrier which can be merged

[2], if it is configured; otherwise, all L SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

For a UE that supports Pre-MG, the requirements in 9.2.5.3 also apply when a Pre-MG is deactivated.

For UE supporting concurrent measurement gaps, when concurrent gaps are configured, the requirements in 9.2.5.3 are also applied to the slots that are not interrupted according to requirements in clause 9.1.8.3.

9.2.5.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the SMTC periodicity follows *smtc2*; Otherwise SMTC periodicity follows *smtc1*.

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

When TDD intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell also apply to all other serving cells in the same band on the symbols that fully or partially overlap with the aforementioned restricted symbols.

When TDD inter-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell also apply to another serving cell in a different band on the symbols that fully or partially overlap with the aforementioned restricted symbols, if UE does not have the capability of supporting *simultaneousRxTxInterBandCA* for this band pair.

9.2.5.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement

- If *deriveSSB_IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer signalling of *smtc2* is configured (in TS 38.331 [2]), the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.
- If *deriveSSB_IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

If the following conditions are met:

- The UE has been notified about system information update through paging,
- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots

The UE shall receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and/or the corresponding PDSCH, on SSB symbols to be measured.

When intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell also apply to all other serving cells in the same band on the symbols that fully or partially overlap with the aforementioned restricted symbols.

9.2.5.3.3 Scheduling availability of UE performing measurements on FR2

The following scheduling restriction applies due to SS-RSRP or SS-SINR measurement on an FR2 intra-frequency cell

- If *deriveSSB-IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on K data symbol(s) before each consecutive SSB symbols to be measured and K data symbol(s) after each consecutive SSB symbols to be measured within SMTC window duration.
- If *deriveSSB-IndexFromCell* is not enabled and the SCS of data and SSB symbols are smaller than 960kHz, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration.
- If *deriveSSB-IndexFromCell* is not enabled and the SCS of data or SSB symbols is 960kHz, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI SSB symbols to be measured, and on K' data symbol(s) before each consecutive SSB symbols to be measured and K' data symbol(s) after each consecutive SSB symbols to be measured within SMTC window duration.

The following scheduling restriction applies to SS-RSRQ measurement on an FR2 intra-frequency cell

- If *deriveSSB-IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, RSSI measurement symbols, and on K data symbol(s) before each consecutive SSB to be measured/RSSI symbols and K data symbol(s) after each consecutive SSB to be measured/RSSI symbols within SMTC window duration
- If *deriveSSB-IndexFromCell* is not enabled and the SCS of data and SSB symbols are smaller than 960kHz, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration.
- If *deriveSSB-IndexFromCell* is not enabled and the SCS of SSB symbols is 960kHz, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, RSSI measurement symbols, and on K' data symbol(s) before each consecutive SSB to be measured/RSSI symbols and K' data symbol(s) after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

where

- If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.
- The signaling *deriveSSB-IndexFromCell* is always enabled for FR2-1 and FR2-2 when SSB is using 120 kHz SCS and 480 kHz SCS.
- K=1 for a serving cell with data symbols of 120 kHz SCS
- K=4 for a serving cell with data symbols of 480 kHz SCS and SSB symbols of 120kHz or 480kHz SCS
- K=3 for a serving cell with data symbols of 480 kHz SCS and SSB symbols of 960kHz SCS
- K=7 for a serving cell with data symbols of 960 kHz SCS and SSB symbols of 120kHz or 480kHz SCS
- K=4 for a serving cell with data symbols of 960 kHz SCS and SSB symbols of 960kHz SCS
- K'=2 for a serving cell with data symbols of 120 kHz SCS and SSB symbols of 960kHz SCS
- K'=4 for a serving cell with data symbols of 480 kHz SCS and SSB symbols of 960kHz SCS
- K'=7 for a serving cell with data symbols of 960 kHz SCS and SSB symbols of 960kHz SCS

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions due to a given serving cell also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cells in the bands due to SS-RSRP, SS-RSRQ or SS-SINR measurement on an FR2 intra-frequency cell in different bands, provided that UE is capable of independent beam management on this FR2 band pair. Additionally, there is no scheduling restriction if the UE is configured with different numerology between SSB on one FR2 band and data on the other FR2 band provided the UE is configured for IBM operation for the band pair.

Note: When inter-band carrier aggregation in FR2 is performed, the scheduling restrictions as defined in clause 9.2.5.3.1 due to a given serving cell also apply to another serving cell in a different FR2 band on the symbols that fully or partially overlap with the aforementioned restricted symbols, if UE does not have the capability of supporting *simultaneousRxTxInterBandCA* for this FR2 band pair.

If following conditions are met:

- The UE has been notified about system information update through paging,
- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, the UE shall receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, the UE shall receive PDSCH that corresponds to the PDCCH that the UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured.

9.2.5.3.4 Scheduling availability of UE performing measurements on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 serving cell(s) due to measurements performed on FR2 serving cell frequency layer. However, the scheduling restrictions as defined in clause 9.2.5.3.1 due to a given serving cell in FR2 also apply to another serving cell in an FR1 band on the symbols that fully or partially overlap with the aforementioned restricted symbols, if UE does not have the capability of supporting *simultaneousRxTxInterBandCA* for this FR1-FR2 band pair.

There are no scheduling restrictions on FR2 serving cell(s) due to measurements performed on FR1 serving cell frequency layer. However, the scheduling restrictions as defined in clause 9.2.5.3.1 due to a given serving cell in FR1 also apply to another serving cell in an FR2 band on the symbols that fully or partially overlap with the aforementioned restricted symbols, if UE does not have the capability of supporting *simultaneousRxTxInterBandCA* for this FR1-FR2 band pair.

9.2.5.4 SFTD Measurements between PCell and PSCell

9.2.5.4.1 Introduction

This clause contains SFTD measurement requirements for UE which supports NR-DC and is configured with a PSCell in RRC_CONNECTED state. The UE shall perform SFTD measurement between PCell and PSCell, and report the SFTD result with/without SS-RSRP after the network requests with *reportType* for the associated *reportConfig* set to *reportSFTD*. The overall delay includes RRC procedure delay defined in clause 12 in TS 38.331 [2], and SFTD measurement reporting delay in clause 9.2.5.4.3..

9.2.5.4.2 SFTD Measurement delay

When no DRX is used in either of PCell and PSCell, the physical layer measurement period of the SFTD measurement shall be $T_{\text{measure_SFTD1}} = \max(200, 5 \times \text{SMTC period})$ ms, where the SMTC period refers to the maximum between the configured SMTC period in PCell and PSCell.

When DRX is used in either of the PCell or the PSCell, or in both PCell and PSCell, the physical layer measurement period ($T_{\text{measure_SFTD1}}$) of the SFTD measurement shall be as specified in Table 9.2.5.4.2-1.

Table 9.2.5.4.2-1: SFTD measurement requirement when DRX is used

DRX cycle length (s) ^{Note 3}	$T_{\text{measure_SFTD1}}$ (s)
--	---------------------------------

≤ 0.04	$\max(0.2, 5 \times \text{SMTC period})$ (Note2)
$0.04 < \text{DRX cycle} \leq 0.32$	$8 \times \max(\text{DRX cycle}, \text{SMTC period})$
$0.32 < \text{DRX cycle} \leq 10.24$	$5 \times \text{DRX cycle}$
Note 1: SMTC period in this table refers to the maximum between the configured SMTC period in PCell and PSCell. Note 2: Number of DRX cycles depends upon the DRX cycle in use Note 3: DRX cycle length in this table refers to the DRX cycle length configured for PCell or PSCell. When DRX is used in both PCell and PSCell, DRX cycle length in this table refers to the longer of the DRX cycle lengths for PCell and PSCell.	

If PSCell is changed without changing carrier frequency of PSCell, while the UE is performing SFTD measurements, the UE shall still meet SFTD measurement and accuracy requirements for the new PSCell. In this case the UE shall restart the SFTD measurement, and the total physical layer measurement period shall not exceed $T_{\text{measure_SFTD2}}$ as defined by the following expression:

$$T_{\text{measure_SFTD2}} = (M+1) \cdot (T_{\text{measure_SFTD1}}) + M \cdot T_{\text{PSCell_change_NRDC}}$$

where:

M is the number of times the NR PSCell is changed over the measurement period ($T_{\text{measure_SFTD2}}$), and

$T_{\text{PSCell_change_NRDC}}$ is the time necessary to change the PSCell; it can be up to 25ms.

If PCell is changed, or if PSCell is changed with different carrier frequency from PSCell, the UE shall terminate SFTD measurements.

The measurement accuracy for the SFTD measurement when DRX is used as well as when no DRX is used shall be as specified in the clause 10.1.21.

9.2.5.4.3 SFTD Measurement Reporting Delay

The SFTD measurement reporting delay is defined as the time between a command that will trigger an SFTD measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times T_{\text{TI}_{\text{DCCH}}}$. This measurement reporting delay excludes any delay caused by no UL resources available for UE to send the measurement report.

The SFTD measurement reporting delay shall be less than measurement period defined in clause 9.2.5.4.2 plus the RRC procedure delay defined in TS 38.331 [2].

9.2.6 Intra-frequency measurements with measurement gaps

9.2.6.1 Void

9.2.6.2 Intra-frequency cell identification

When a measurement gap is provided or an activated Pre-MG is provided without any pre-MG status changed during the measurement period, the UE shall be able to identify a new detectable intra frequency cell within $T_{\text{identify_intra_without_index}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsinIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{\text{identify_intra_with_index}}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{\text{identify_intra_without_index}}$. It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2 with SCS smaller or equal to 480 kHz.

$$T_{\text{identify_intra_without_index}} = T_{\text{PSS/SSS_sync_intra}} + T_{\text{SSB_measurement_period_intra}} \text{ ms}$$

$$T_{\text{identify_intra_with_index}} = T_{\text{PSS/SSS_sync_intra}} + T_{\text{SSB_measurement_period_intra}} + T_{\text{SSB_time_index_intra}} \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_intra}}$: it is the time period used in PSS/SSS detection given in table 9.2.6.2-1, 9.2.6.2-2 or 9.2.6.2-9.

- For UE supporting power class 6 with *highSpeedMeasFlagFR2-r17* configured, if $\text{SMTC} \leq 40\text{ms}$, $T_{\text{PSS/SSS_sync_intra}}$ is given in Table 9.2.6.2-9; otherwise, $T_{\text{PSS/SSS_sync_intra}}$ is given in Table 9.2.6.2-2.

$T_{\text{SSB_time_index_intra}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2.6.2-3 or 9.2.6.2-10 (for FR2-2).

$T_{\text{SSB_measurement_period_intra}}$: equal to a measurement period of SSB based measurement given in table 9.2.6.3-1 or 9.2.6.3-2.

- For UE supporting power class 6 with *highSpeedMeasFlagFR2-r17* configured, if $\text{SMTC} \leq 40\text{ms}$, $T_{\text{SSB_measurement_period_intra}}$ is given in Table 9.2.6.3-4; otherwise, $T_{\text{SSB_measurement_period_intra}}$ is given in Table 9.2.6.3-2.

$\text{CSSF}_{\text{intra}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{within_gap},i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

K_{gap} is the scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. $K_{\text{gap}} = 1$ when the UE is not configured with concurrent measurement gaps. Otherwise, $K_{\text{gap}} = N_{\text{total}} / N_{\text{available}}$, where $N_{\text{available}}$ and N_{total} are calculated as follows:

For a window W of duration $\max(\text{SMTC period}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gap and per-FR measurement gap within the same FR as the SSB frequency layer, and starting from the beginning of any SMTC occasion:

- N_{total} is the total number of SMTC occasions that are covered by instances of the associated measurement gap within the window W , including those overlapped with other measurement gap occasions within the window, and
- $N_{\text{available}}$ is the number of SMTC occasions that are covered by instances of the non-dropped associated measurement gap within the window W after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3.

When concurrent measurement gaps are configured, requirements in this clause do not apply if $N_{\text{available}} = 0$.

$M_{\text{pss/sss_sync_with_gaps}}$: For a UE supporting FR2-1 power class 1 or 5, $M_{\text{pss/sss_sync_with_gaps}} = 40$. For a UE supporting FR2-1 power class 2, $M_{\text{pss/sss_sync_with_gaps}} = 24$. For a UE supporting FR2-1 power class 3, $M_{\text{pss/sss_sync_with_gaps}} = 24$. For a UE supporting FR2-1 power class 4, $M_{\text{pss/sss_sync_with_gaps}} = 24$. For a UE supporting FR2-1 power class 6, $M_{\text{pss/sss_sync_with_gaps}} = 24$. For a UE supporting FR2-2 power class 1, $M_{\text{pss/sss_sync_with_gaps}} = 60$. For a UE supporting FR2-2 power class 2, $M_{\text{pss/sss_sync_with_gaps}} = 36$. For a UE supporting FR2-2 power class 3, $M_{\text{pss/sss_sync_with_gaps}} = 36$.

$M_{\text{meas_period_with_gaps}}$: For a UE supporting FR2-1 power class 1 or 5, $M_{\text{meas_period_with_gaps}} = 40$. For a UE supporting FR2-1 power class 2, $M_{\text{meas_period_with_gaps}} = 24$. For a UE supporting FR2-1 power class 3, $M_{\text{meas_period_with_gaps}} = 24$. For a UE supporting FR2-1 power class 4, $M_{\text{meas_period_with_gaps}} = 24$. For a UE supporting FR2-1 power class 6, $M_{\text{meas_period_with_gaps}} = 24$. For a UE supporting FR2-2 power class 1, $M_{\text{meas_period_with_gaps}} = 60$. For a UE supporting FR2-2 power class 2, $M_{\text{meas_period_with_gaps}} = 36$. For a UE supporting FR2-2 power class 3, $M_{\text{meas_period_with_gaps}} = 36$.

- $M_{\text{SSB_index_intra}}$: For a UE supporting FR2-2 power class 1, $M_{\text{SSB_index_intra}} = 72$. For a UE supporting FR2-2 power class 2, $M_{\text{SSB_index_intra}} = 48$. For a UE supporting FR2 power class 3, $M_{\text{SSB_index_intra}} = 48$.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, requirements are not specified for $T_{\text{identify_intra_without_index}}$ OR $T_{\text{identify_intra_with_index}}$.

If MCG DRX is in use, cell identification requirements for intra-frequency measurement in MCG specified in Table 9.2.6.2-1, Table 9.2.6.2-2, and Table 9.2.6.2-3 shall depend on the MCG DRX cycle. If SCG DRX is in use, cell identification requirements for intra-frequency measurement in SCG specified in Table 9.2.6.2-1, Table 9.2.6.2-2, and Table 9.2.6.2-3 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

Table 9.2.6.2-1: Time period for PSS/SSS detection (FR1)

DRX cycle	$T_{\text{PSS/SSS_sync_intra}}$
-----------	-----------------------------------

No DRX	$\max(600\text{ms}, 5 \times K_{\text{gap}} \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(M2^{\text{Note 1}} \times 5 \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
NOTE 1: When <i>highSpeedMeasFlag-r16</i> is not configured, $M2 = 1.5$; When <i>highSpeedMeasFlag-r16</i> is configured, $M2 = 1.5$ if SMTC periodicity > 40 ms, otherwise $M2=1$. NOTE 2: When <i>highSpeedMeasFlag-r16</i> is configured, the requirements apply only to UE supporting either <i>measurementEnhancement-r16</i> or <i>intraNR-MeasurementEnhancement-r16</i> on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell. NOTE 3: For a UE supporting concurrent measurement gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer. NOTE 4: When <i>highSpeedMeasCA-Scell-r17</i> is configured, the requirements apply to UE on measurements of secondary component carrier with active SCell.	

Table 9.2.6.2-2: Time period for PSS/SSS detection (FR2)

DRX cycle	$T_{\text{PSS/SSS_sync_intra}}$
No DRX	$\max(600\text{ms}, M_{\text{pss/sss_sync_with_gaps}} \times K_{\text{FR}} \times K_{\text{gap}} \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(1.5 \times M_{\text{pss/sss_sync_with_gaps}} \times K_{\text{FR}} \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(M_{\text{pss/sss_sync_with_gaps}} \times K_{\text{FR}} \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
NOTE 1: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer. NOTE 2: K_{FR} is a scaling factor depending on the frequency range and the SSB SCS. For FR2-1, $K_{\text{FR}} = 1$. For FR2-2: $K_{\text{FR}} = 1$ if the SCS of the SSB of the cell being detected is 120 kHz, $K_{\text{FR}} = 2$ if the SCS of the SSB of the cell being detected is 480 kHz, and $K_{\text{FR}} = 3$ if the SCS of the SSB of the cell being detected is 960 kHz.	

Table 9.2.6.2-3: Time period for time index detection (Frequency range FR1)

DRX cycle	$T_{\text{SSB_time_index_intra}}$
No DRX	$\max(120\text{ms}, \text{ceil}(3 \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(120\text{ms}, \text{ceil}(M2^{\text{Note 1}} \times 3 \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(3 \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
NOTE 1: When <i>highSpeedMeasFlag-r16</i> is not configured, $M2 = 1.5$; When <i>highSpeedMeasFlag-r16</i> is configured, $M2 = 1.5$ if SMTC periodicity > 40 ms, otherwise $M2=1$. NOTE 2: When <i>highSpeedMeasFlag-r16</i> is configured, the requirements apply only to UE supporting either <i>measurementEnhancement-r16</i> or <i>intraNR-MeasurementEnhancement-r16</i> on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell. NOTE 3: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer. NOTE 4: When <i>highSpeedMeasCA-Scell-r17</i> is configured, the requirements apply to UE on measurements of secondary component carrier with active SCell.	

Table 9.2.6.2-7: Void

Table 9.2.6.2-8: Void

Table 9.2.6.2-8: Void

Table 9.2.6.2-9: Time period for PSS/SSS detection when *highSpeedMeasFlagFR2-r17* is configured, (FR2) when SMTC period $\leq 40\text{ms}$

DRX cycle	$T_{\text{PSS/SSS_sync_intra}}$
No DRX	$\max(600\text{ms}, M1^{\text{Note 2}} \times K_{\text{gap}} \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra}}$

DRX cycle ≤ 80ms	$\max(600\text{ms}, \text{ceil}(M1^{\text{Note2}} \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
80ms < DRX cycle ≤ 320ms	$\max(600\text{ms}, \text{ceil}(M_{\text{pss/sss_sync_with_gaps}} \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle > 320ms	$\text{Ceil}(M_{\text{pss/sss_sync_with_gaps}} \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
NOTE 1: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer.	
NOTE 2: For UE supporting power class 6, M1 = 6 if <i>highSpeedMeasFlagFR2-r17</i> = set1 or M1 = 18 if <i>highSpeedMeasFlagFR2-r17</i> = set2	
NOTE 3: Void	

Table 9.2.6.2-10: Time period for time index detection (Frequency range FR2-2)

DRX cycle	T _{SSB_time_index_intra}
No DRX	$\max(200\text{ms}, \text{ceil}(M_{\text{SSB_index_intra}} \times K_{\text{gap}} \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra}}$
DRX cycle ≤ 320ms	$\max(200\text{ms}, \text{ceil}(1.5 \times M_{\text{SSB_index_intra}} \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}})$
DRX cycle > 320ms	$\text{Ceil}(M_{\text{SSB_index_intra}} \times K_{\text{gap}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$

9.2.6.3 Intrafrequency Measurement Period

The requirements in this clause apply when a measurement gap is provided or when an activated Pre-MG is provided without any pre-MG status changed during the measurement period.

The measurement period for FR1 intrafrequency measurements with gaps is as shown in table 9.2.6.3-1.

The measurement period for FR2 intrafrequency measurements with gaps is as shown in table 9.2.6.3-2.

When *highSpeedMeasFlag-r16* is configured, T_{SSB_measurement_period_intra} is specified in Table 9.2.6.3-3.

If MCG DRX is in use, measurement period requirements for intra-frequency measurement in MCG specified in Table 9.2.6.3-1 and Table 9.2.6.3-2, shall depend on the MCG DRX cycle. If SCG DRX is in use, measurement period requirements for intra-frequency measurement in SCG specified in Table 9.2.6.3-1 and Table 9.2.6.3-2, shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

For either an FR1 or FR2 serving cell, longer measurement period would be expected during the period T_{identify_CGI} when the UE is requested to decode an NR CGI.

Table 9.2.6.3-1: Measurement period for intra-frequency measurements with gaps(FR1)

DRX cycle	T _{SSB_measurement_period_intra}
No DRX	$\max(200\text{ms}, \text{ceil}(5 \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra}}$
DRX cycle ≤ 320ms	$\max(200\text{ms}, \text{ceil}(1.5 \times 5 \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle > 320ms	$\text{Ceil}(5 \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
NOTE 1: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer.	

Table 9.2.6.3-2: Measurement period for intra-frequency measurements with gaps(FR2)

DRX cycle	T _{SSB_measurement_period_intra}
No DRX	$\max(400\text{ms}, \text{ceil}(M_{\text{meas_period_with_gaps}} \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra}}$
DRX cycle ≤ 320ms	$\max(400\text{ms}, \text{ceil}(1.5 \times M_{\text{meas_period_with_gaps}} \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}^{\text{Note 1}}$
DRX cycle > 320ms	$\text{Ceil}(M_{\text{meas_period_with_gaps}} \times K_{\text{gap}}) \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$

NOTE 1: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer.

Table 9.2.6.3-3: Measurement period When *highSpeedMeasFlag-r16* is configured (Frequency Range FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	$\max(200\text{ms}, \text{ceil}(5 \times K_{gap}) \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{intra}$ ^{Note 1}
DRX cycle $\leq 160\text{ms}$	$\max(200\text{ms}, \text{ceil}(M2^{\text{Note 2}} \times 5 \times K_{gap}) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{intra}$
$160\text{ms} < \text{DRX cycle} \leq 320\text{ms}$	$\max(200\text{ms}, \text{ceil}(M2^{\text{Note 2}} \times 4 \times K_{gap}) \times \max(\text{MGRP}, \text{DRX cycle})) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(Y^{\text{Note 3}} \times K_{gap}) \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: $M2 = 1.5$ if SMTC periodicity > 40 ms, otherwise $M2=1$ NOTE 3: $Y=3$ when SMTC $\leq 40\text{ms}$, $Y=5$ when SMTC $> 40\text{ms}$ NOTE 4: When <i>highSpeedMeasFlag-r16</i> is configured, the requirements apply only to UE supporting either <i>measurementEnhancement-r16</i> or <i>intraNR-MeasurementEnhancement-r16</i> on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell. NOTE 5: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer. NOTE 6: When <i>highSpeedMeasCA-Scell-r17</i> is configured, the requirements also apply to UE on measurements of secondary component carrier with active SCell.	

Table 9.2.6.3-4: Measurement period for intra-frequency measurements with gaps when *highSpeedMeasFlagFR2-r17* is configured (FR2) when SMTC period $\leq 40\text{ms}$

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	$\max(400\text{ms}, \text{ceil}(M1^{\text{Note 2}} \times K_{gap}) \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{intra}$
DRX cycle $\leq 80\text{ms}$	$\max(400\text{ms}, \text{ceil}(M1^{\text{Note 2}} \times K_{gap}) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{intra}$ ^{Note 1}
$80\text{ms} < \text{DRX cycle} \leq 320\text{ms}$	$\max(400\text{ms}, \text{ceil}(M_{\text{meas_period with_gaps}} \times K_{gap}) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{intra}$ ^{Note 1}
DRX cycle $> 320\text{ms}$	$\text{Ceil}(M_{\text{meas_period with_gaps}} \times K_{gap}) \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{intra}$
NOTE 1: For a UE supporting concurrent gaps, if multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the intra-frequency layer. NOTE 2: For UE supporting power class 6, $M1 = 6$ if <i>highSpeedMeasFlagFR2-r17</i> = set1 or $M1 = 18$ if <i>highSpeedMeasFlagFR2-r17</i> = set2 NOTE 3: Void	

9.2.7 Intra-frequency measurements with NCSG

9.2.7.1 Intra-frequency cell identification

For the UE supporting NCSG, if NCSG is provided, the UE shall be able to identify a new detectable intra frequency cell within $T_{\text{identify_intra_without_index}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{\text{identify_intra_with_index}}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{\text{identify_intra_without_index}}$. It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{\text{identify_intra_without_index}} = T_{\text{PSS/SSS_sync_intra}} + T_{\text{SSB_measurement_period_intra}} \text{ ms}$$

$$T_{\text{identify_intra_with_index}} = T_{\text{PSS/SSS_sync_intra}} + T_{\text{SSB_measurement_period_intra}} + T_{\text{SSB_time_index_intra}} \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_intra}}$: it is the time period used in PSS/SSS detection given in table 9.2.7.1-1, 9.2.7.1-2, 9.2.7.1-4 (deactivated SCell) or 9.2.7.1-5 (deactivated SCell).

$T_{\text{SSB_time_index_intra}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2.7.1-3 or 9.2.7.1-6 (deactivated SCell).

$T_{\text{SSB_measurement_period_intra}}$: equal to a measurement period of SSB based measurement given in table 9.2.7.2-1, 9.2.7.2-2, 9.2.7.2-3, 9.2.7.2-4 (deactivated SCell) or 9.2.7.2-5 (deactivated SCell).

$\text{CSSF}_{\text{intra}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{within_ncsg},i}$ in clause 9.1.5.3 for measurement conducted within NCSG.

$M_{\text{pss/sss_sync_with_gaps}}$: For a UE supporting FR2 power class 1 or 5, $M_{\text{pss/sss_sync_with_gaps}}=40$. For a UE supporting FR2 power class 2, $M_{\text{pss/sss_sync_with_gaps}}=24$. For a UE supporting FR2 power class 3, $M_{\text{pss/sss_sync_with_gaps}}=24$. For a UE supporting power class 4, $M_{\text{pss/sss_sync_with_gaps}}=24$

$M_{\text{meas_period_with_gaps}}$: For a UE supporting power class 1 or 5, $M_{\text{meas_period_with_gaps}}=40$. For a UE supporting power class 2, $M_{\text{meas_period_with_gaps}}=24$. For a UE supporting power class 3, $M_{\text{meas_period_with_gaps}}=24$. For a UE supporting power class 4, $M_{\text{meas_period_with_gaps}}=24$.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and *smtc1* is fully overlapping with NCSG and *smtc2* is partially overlapping with NCSG, requirements are not specified for $T_{\text{identify_intra_without_index}}$ or $T_{\text{identify_intra_with_index}}$.

Table 9.2.7.1-1: Time period for PSS/SSS detection with NCSG (FR1)

DRX cycle	$T_{\text{PSS/SSS_sync_intra}}$
No DRX	$\max(600\text{ms}, 5 \times \max(\text{VIRP, SMTC period})) \times \text{CSSF}_{\text{intra}}$
$\text{DRX cycle} \leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(M2^{\text{Note 1}} \times 5) \times \max(\text{VIRP, SMTC period, DRX cycle})) \times \text{CSSF}_{\text{intra}}$
$\text{DRX cycle} > 320\text{ms}$	$5 \times \max(\text{VIRP, DRX cycle}) \times \text{CSSF}_{\text{intra}}$
NOTE 1: When <i>highSpeedMeasFlag-r16</i> is not configured, $M2 = 1.5$; When <i>highSpeedMeasFlag-r16</i> is configured, $M2 = 1.5$ if SMTC periodicity > 40 ms, otherwise $M2=1$.	
NOTE 2: When <i>highSpeedMeasFlag-r16</i> is configured, the requirements apply only to UE supporting either <i>measurementEnhancement-r16</i> or [<i>intraRAT-MeasurementEnhancement-r16</i>] on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.	

Table 9.2.7.1-2: Time period for PSS/SSS detection with NCSG (FR2)

DRX cycle	$T_{\text{PSS/SSS_sync_intra}}$
No DRX	$\max(600\text{ms}, M_{\text{pss/sss_sync_with_gaps}} \times \max(\text{VIRP, SMTC period})) \times \text{CSSF}_{\text{intra}}$
$\text{DRX cycle} \leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(1.5 \times M_{\text{pss/sss_sync_with_gaps}}) \times \max(\text{VIRP, SMTC period, DRX cycle})) \times \text{CSSF}_{\text{intra}}$
$\text{DRX cycle} > 320\text{ms}$	$M_{\text{pss/sss_sync_with_gaps}} \times \max(\text{VIRP, DRX cycle}) \times \text{CSSF}_{\text{intra}}$

Table 9.2.7.1-3: Time period for time index detection with NCSG (FR1)

DRX cycle	$T_{\text{SSB_time_index_intra}}$
No DRX	$\max(120\text{ms}, 3 \times \max(\text{VIRP, SMTC period})) \times \text{CSSF}_{\text{intra}}$
$\text{DRX cycle} \leq 320\text{ms}$	$\max(120\text{ms}, \text{ceil}(M2^{\text{Note 1}} \times 3) \times \max(\text{VIRP, SMTC period, DRX cycle})) \times \text{CSSF}_{\text{intra}}$
$\text{DRX cycle} > 320\text{ms}$	$3 \times \max(\text{VIRP, DRX cycle}) \times \text{CSSF}_{\text{intra}}$
NOTE 1: <i>highSpeedMeasFlag-r16</i> is not configured, $M2 = 1.5$; When <i>highSpeedMeasFlag-r16</i> is configured, $M2 = 1.5$ if SMTC periodicity > 40 ms, otherwise $M2=1$.	
NOTE 2: When <i>highSpeedMeasFlag-r16</i> is configured, the requirements apply only to UE supporting either <i>measurementEnhancement-r16</i> or [<i>intraRAT-MeasurementEnhancement-r16</i>] on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.	

Table 9.2.7.1-4: Time period for PSS/SSS detection with NCSG (deactivated SCell) (FR1)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	$5 \times \max(\text{measCycleSCell}, \text{VIRP}) \times \text{CSSF}_{intra}$
DRX cycle $\leq 320\text{ms}$	$5 \times \max(\text{measCycleSCell}, \text{VIRP}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$5 \times \max(\text{measCycleSCell}, \text{VIRP}, \text{DRX cycle}) \times \text{CSSF}_{intra}$

Table 9.2.7.1-5: Time period for PSS/SSS detection with NCSG (deactivated SCell) (FR2)

DRX cycle	T_{PSS/SSS_sync_intra}
No DRX	$M_{pss/sss_with_ncsg} \times \max(\text{measCycleSCell}, \text{VIRP}) \times \text{CSSF}_{intra}$
DRX cycle $\leq 320\text{ms}$	$M_{pss/sss_with_ncsg} \times \max(\text{measCycleSCell}, \text{VIRP}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$M_{pss/sss_with_ncsg} \times \max(\text{measCycleSCell}, \text{VIRP}, \text{DRX cycle}) \times \text{CSSF}_{intra}$

Table 9.2.7.1-6: Time period for time index detection with NCSG (deactivated SCell) (FR1)

DRX cycle	$T_{SSB_time_index_intra}$
No DRX	$3 \times \max(\text{measCycleSCell}, \text{VIRP}) \times \text{CSSF}_{intra}$
DRX cycle $\leq 320\text{ms}$	$3 \times \max(\text{measCycleSCell}, \text{VIRP}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$3 \times \max(\text{measCycleSCell}, \text{VIRP}, \text{DRX cycle}) \times \text{CSSF}_{intra}$

9.2.7.2 Measurement period

When *highSpeedMeasFlag-r16* is configured, the measurement period with NCSG is specified in Table 9.2.7.2-3.

For either an FR1 or FR2 serving cell, longer measurement period would be expected during the period $T_{identify_CGI}$ when the UE is requested to decode an NR CGI.

Table 9.2.7.2-1: Measurement period for intra-frequency measurements with NCSG (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	$\max(200\text{ms}, 5 \times \max(\text{VIRP}, \text{SMTC period})) \times \text{CSSF}_{intra}$
DRX cycle $\leq 320\text{ms}$	$\max(200\text{ms}, \text{ceil}(1.5 \times 5) \times \max(\text{VIRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$5 \times \max(\text{VIRP}, \text{DRX cycle}) \times \text{CSSF}_{intra}$

Table 9.2.7.2-2: Measurement period for intra-frequency measurements with NCSG (FR2)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	$\max(400\text{ms}, M_{meas_period_with_gaps} \times \max(\text{VIRP}, \text{SMTC period})) \times \text{CSSF}_{intra}$
DRX cycle $\leq 320\text{ms}$	$\max(400\text{ms}, \text{ceil}(1.5 \times M_{meas_period_with_gaps}) \times \max(\text{VIRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{intra}$ ^{Note 1}
DRX cycle $> 320\text{ms}$	$M_{meas_period_with_gaps} \times \max(\text{VIRP}, \text{DRX cycle}) \times \text{CSSF}_{intra}$

Table 9.2.7.2-3: Measurement period with NCSG When *highSpeedMeasFlag-r16* is configured (FR1)

DRX cycle	$T_{SSB_measurement_period_intra}$
No DRX	$\max(200\text{ms}, 5 \times \max(\text{VIRP}, \text{SMTC period})) \times \text{CSSF}_{intra}$ ^{Note 1}
DRX cycle $\leq 160\text{ms}$	$\max(200\text{ms}, \text{ceil}(M_2^{\text{Note 2}} \times 5) \times \max(\text{VIRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{intra}$

160ms < DRX cycle ≤ 320ms	$\max(200\text{ms}, \text{ceil}(M2^{\text{Note 2}} \times 4) \times \max(\text{VIRP}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle > 320ms	$Y^{\text{Note 3}} \times \max(\text{VIRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: $M2 = 1.5$ if SMTC periodicity > 40 ms, otherwise $M2 = 1$ NOTE 3: $Y = 3$ when SMTC ≤ 40ms, $Y = 5$ when SMTC > 40ms NOTE 4: When <i>highSpeedMeasFlag-r16</i> is configured, the requirements apply only to UE supporting either <i>measurementEnhancement-r16</i> or [<i>intraRAT-MeasurementEnhancement-r16</i>] on measurements of the primary component carrier and do not apply to measurements of a secondary component carrier with active SCell.	

Table 9.2.7.2-4: Measurement period for intra-frequency measurements with NCSG (deactivated SCell) (FR1)

DRX cycle	$T_{\text{SSB_measurement_period_intra}}$
No DRX	$5 \times \max(\text{measCycleSCell}, \text{VIRP}) \times \text{CSSF}_{\text{intra}}$
DRX cycle ≤ 320ms	$5 \times \max(\text{measCycleSCell}, \text{VIRP}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
DRX cycle > 320ms	$5 \times \max(\text{measCycleSCell}, \text{VIRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$

Table 9.2.7.2-5: Measurement period for intra-frequency measurements with NCSG (deactivated SCell) (FR2)

DRX cycle	$T_{\text{SSB_measurement_period_intra}}$
No DRX	$M_{\text{meas_period with_gaps}} \times \max(\text{measCycleSCell}, \text{VIRP}) \times \text{CSSF}_{\text{intra}}$
DRX cycle ≤ 320ms	$M_{\text{meas_period with_gaps}} \times \max(\text{measCycleSCell}, \text{VIRP}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$
DRX cycle > 320ms	$M_{\text{meas_period with_gaps}} \times \max(\text{measCycleSCell}, \text{VIRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$

Note: Requirements for measurement on deactivated SCC in this clause do not apply if SMTC on the deactivated SCC is fully non-overlapped with NCSG, and the requirements for measurement on deactivated SCC specified in clause 9.2.5 apply.

9.2.7.3 Scheduling availability during intra-frequency measurement with NCSG

Scheduling availability specified in 9.2.5.3 applies to scheduling availability during intra-frequency measurement with NCSG.

9.2A NR intra-frequency measurements with CCA

9.2A.1 Introduction

The requirements in clause 9.2.A apply for intra-frequency measurements on carrier frequency with CCA.

When the intra-frequency measurement is performed on a neighbour cell in FR2-2 with shared spectrum channel access, UE shall determine the CCA mode of the neighbour cell according to *channelAccessMode2-r17* of the cell configured in *MeasObjectNR*. If *channelAccessMode2-r17* of the cell is enabled, UE shall assume that CCA applies to the cell and perform measurement accordingly, and the requirements in clause 9.2A shall apply; otherwise, UE shall assume that CCA does not apply to the cell and perform measurement accordingly, and requirements in 9.2 shall apply.

A measurement is defined as a SSB based intra-frequency measurement provided the centre frequency of the SSB of the serving cell indicated for measurement and the centre frequency of the SSB of the neighbour cell are the same, and the subcarrier spacing of the two SSBs are also the same.

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified intra-frequency cells if carrier frequency information is provided by PCell or the PSCell, even if no explicit neighbour list with physical layer cell identities is provided.

The UE can perform intra-frequency SSB based measurements without measurement gaps if

- the SSB is completely contained in the active BWP of the UE, or
- the active downlink BWP is initial BWP[3].

For intra-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in clause 9.2A.5.3.

SSB based measurements are configured along with one or two measurement timing configuration(s) (SMTC(s)) which provides periodicity, duration and offset information on a window of up to 5ms where the measurements are to be performed. For intra-frequency connected mode measurements, up to two measurement window periodicities may be configured. A single measurement window offset and measurement duration are configured per intra-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB which start earlier than the gap starting time + switching time, nor detect SSB which end later than the gap end – switching time. Switching time is 0.5ms for frequency range FR1 and 0.25 ms for frequency range FR2-2.

In the requirements of clause 9.2A, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but N_{SSB} candidate SSB positions for the same SSB index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding period, where:

- For the cell detection procedure: N_{SSB} is at least one candidate SSB position (NOTE: the one candidate SSB position for the cell detection shall not be impacted by the set of candidate SSB positions which are already being measured by the UE within the current measurement period of the on-going measurements), and
- For other procedures in clause 9.2A: N_{SSB} are the first two successive candidate SSB positions when two or more candidate SSB positions are configured for this SSB index in one discovery burst transmission window, otherwise N_{SSB} is one candidate SSB position;

otherwise the SMTC occasion is considered as available at the UE.

For the FR2-2 requirements of clause 9.2A, an SMTC occasion group consists of N consecutive SMTC occasions, where N is the UE Rx beam sweeping scaling factor. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.

9.2A.2 Requirements applicability

The requirements in clause 9.2A apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clause 10.1.27 and TBD for FR1 and FR2-2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in clause 10.1.29 and TBD for FR1 and FR2-2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in clause 10.1.31 and TBD for FR1 and FR2-2, respectively, for a corresponding Band,
- SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.8 for a corresponding Band.

9.2A.3 Number of cells and number of SSB

9.2A.3.1 Requirements for FR1

For each intra-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 8 identified cells, and
- 14 SSBs with different SSB index and/or PCI on the intra-frequency layer, where the number of SSBs in the serving cell (except for the SCell) is not smaller than the number of configured RLM-RS SSB resources.

9.2A.3.2 Requirements for FR2-2

For one single intra-frequency layer in a band, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 6 identified cells, and
- 24 SSBs with different SSB index and/or PCI,

where this single intra-frequency layer shall be:

- PCC when UE is configured with SA NR operation mode with PCC in the band; or
- PSCC when UE is configured with NR-DC with PSCC in the band; or
- One of the SCCs on which UE is configured to report SSB based measurements when neither PCC nor PSCC is in the same band, so that the selected SCC shall be an SCC where the UE is configured with SS-RSRP measurement reporting if such SCC exists, otherwise the selected SCC is determined by UE implementation.

The UE shall also be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least 2 SSBs on serving cell for each of the other intra-frequency layer(s) in the same band.

9.2A.4 Measurement Reporting Requirements

9.2A.4.1 Periodic Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.36 (RSRP for FR1), TBD (RSRP for FR2-2), 10.1.29 (RSRQ for FR1), TBD (RSRQ for FR2-2), 10.1.31 (RS-SINR for FR1) and TBD (RS-SINR for FR2-2), respectively.

9.2A.4.2 Event-triggered Periodic Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.36 (RSRP for FR1), TBD (RSRP for FR2-2), 10.1.29 (RSRQ for FR1), TBD (RSRQ for FR2-2), 10.1.31 (RS-SINR for FR1) and TBD (RS-SINR for FR2-2), respectively.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.2A.4.3.

9.2A.4.3 Event Triggered Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.36 (RSRP for FR1), TBD (RSRP for FR2-2), 10.1.29 (RSRQ for FR1), TBD (RSRQ for FR2-2), 10.1.31 (RS-SINR for FR1) and TBD (RS-SINR for FR2-2), respectively.

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times T_{\text{TTI}_{\text{DCCH}}}$. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on, and all delays due to UL CCA failures until the successful transmission of the report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{\text{identify intra with index_CCA}}$ or $T_{\text{identify intra without index_CCA}}$ defined in clause 9.2A.5.1 or clause 9.2A.6.2. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{\text{identify_intra_without_index_CCA}}$ or $T_{\text{identify_intra_with_index_CCA}}$ as defined in clause 9.2A.5.1 or clause 9.2A.6.2. If a cell which has been detectable at least for the time period $T_{\text{identify intra without index_CCA}}$ or $T_{\text{identify intra with index_CCA}}$ defined in clause 9.2A.5.1 or clause 9.2A.6.2 becomes undetectable for a period ≤ 8 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{\text{SSB_measurement_period_intra_CCA}}$ provided the timing to that cell has not changed more than $\pm 3200/2^\mu T_c$ while the measurement gap has not been available and the L3 filter has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

9.2A.5 Intra-frequency measurements without measurement gaps

9.2A.5.1 Intra-frequency cell identification

The UE shall be able to identify a new detectable intra frequency cell within $T_{\text{identify_intra_without_index_CCA}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{\text{identify_intra_with_index_CCA}}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{\text{identify_intra_without_index_CCA}}$.

$$T_{\text{identify_intra_without_index_CCA}} = (T_{\text{PSS/SSS_sync_intra_CCA}} + T_{\text{SSB_measurement_period_intra_CCA}}) \text{ ms}$$

$$T_{\text{identify_intra_with_index_CCA}} = (T_{\text{PSS/SSS_sync_intra_CCA}} + T_{\text{SSB_measurement_period_intra_CCA}} + T_{\text{SSB_time_index_intra_CCA}}) \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_intra_CCA}}$: it is the time period used in PSS/SSS detection given in table 9.2A.5.1-1, 9.2A.5.1-3 (deactivated SCell) .

$T_{\text{SSB_time_index_intra_CCA}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2A.5.1-2 or 9.2A.5.1-4 (deactivated SCell).

$T_{\text{SSB_measurement_period_intra_CCA}}$: equal to a measurement period of SSB based measurement given in table 9.2A.5.2-1, 9.2A.5.2-2 (deactivated SCell). $\text{CSSF}_{\text{intra}}$: it is a carrier specific scaling factor and is determined

- according to $\text{CSSF}_{\text{outside_gap},i}$ in clause 9.1.5.1 for measurement conducted outside measurement gaps, i.e. when intra-frequency SMTTC is fully non overlapping or partially overlapping with measurement gaps, or according to $\text{CSSF}_{\text{within_gap},i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps, i.e. when intra-frequency SMTTC is fully overlapping with measurement gaps.
- $M_{\text{pss/sss_sync_w/o_gaps_CCA}}$: For a UE supporting FR2-2 power class 1, $M_{\text{pss/sss_sync_w/o_gaps_CCA}} = 60$. For a UE supporting FR2-2 power class 2, $M_{\text{pss/sss_sync_w/o_gaps_CCA}} = 36$. For a UE supporting FR2-2 power class 3, $M_{\text{pss/sss_sync_w/o_gaps_CCA}} = 36$.
- $M_{\text{meas_period_w/o_gaps_CCA}}$: For a UE supporting FR2-2 power class 1, $M_{\text{meas_period_w/o_gaps_CCA}} = 60$. For a UE supporting FR2-2 power class 2, $M_{\text{meas_period_w/o_gaps_CCA}} = 36$. For a UE supporting FR2-2 power class 3, $M_{\text{meas_period_w/o_gaps_CCA}} = 36$.
- $M_{\text{SSB_index_intra_CCA}}$: For a UE supporting FR2-2 power class 1, $M_{\text{SSB_index_intra_CCA}} = 72$ samples. For a UE supporting FR2-2 power class 2, $M_{\text{SSB_index_intra_CCA}} = 48$ samples. For a UE supporting FR2 power class 3, $M_{\text{SSB_index_intra_CCA}} = 48$ samples.

N: is the UE Rx beam sweeping scaling factor. N = 12.

When intra-frequency SMTC is fully non overlapping with measurement gaps or intra-frequency SMTC is fully overlapping with MGs, $K_p=1$

When intra-frequency SMTC is partially overlapping with measurement gaps, $K_p = 1/(1 - (\text{SMTC period} / \text{MGRP}))$, where $\text{SMTC period} < \text{MGRP}$.

For FR2-2,

$$K_{\text{layer1_measurement}} = \text{TBD}$$

If MCG DRX is in use, intra-frequency cell identification requirements specified in Table 9.2A.5.1-1, Table 9.2A.5.1-2, Table 9.2A.5.1-3, Table 9.2A.5.1-4, Table 9.2A.5.1-5 and Table 9.2A.5.1-6 shall depend on the MCG DRX cycle. If SCG DRX is in use, intra-frequency cell identification requirements specified in Table 9.2A.5.1-1, Table 9.2A.5.1-2, Table 9.2A.5.1-3, Table 9.2A.5.1-4, Table 9.2A.5.1-5 and Table 9.2A.5.1-6 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

The requirements apply provided any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known defined in clause 9.2A.4.3.

Table 9.2A.5.1-1: Time period for PSS/SSS detection (FR1)

Condition	$T_{\text{PSS/SSS_sync_intra_CCA}}$
No DRX	$\max(600\text{ms}, \text{ceil}((5+L_{\text{PSS/SSS}}) \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(1.5 \times (5+L_{\text{PSS/SSS}}) \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{ceil}((5+L_{\text{PSS/SSS}}) \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When DRX is not configured, $L_{\text{PSS/SSS}}$ is the number of SMTC occasions not available at the UE during $T_{\text{PSS/SSS_sync_intra_CCA}}$ for PSS/SSS detection, where $L_{\text{PSS/SSS}} < L_{\text{PSS/SSS,max}}$. When DRX is configured, $L_{\text{PSS/SSS}}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{\text{PSS/SSS_sync_intra_CCA}}$ for PSS/SSS detection, where $L_{\text{PSS/SSS}} < L_{\text{PSS/SSS,max}}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $\text{CSSF}_{\text{intra}}$.	
NOTE 3: $L_{\text{PSS/SSS,max}} = 7$ for $\text{Max}(\text{DRX cycle}, \text{SMTC period}) \leq 40\text{ms}$ where DRX cycle is 0 for non-DRX, $L_{\text{PSS/SSS,max}} = 5$ for $40\text{ms} < \text{Max}(\text{DRX cycle}, \text{SMTC period}) \leq 320\text{ms}$, $L_{\text{PSS/SSS,max}} = 3$ for DRX cycle $> 320\text{ms}$.	
NOTE 4: Upon exceeding $L_{\text{PSS/SSS,max}}$, the UE is not required to meet the requirements for PSS/SSS detection.	

Table 9.2A.5.1-2: Time period for time index detection (FR1)

Condition	$T_{\text{SSB_time_index_intra_CCA}}$
No DRX	$\max(120\text{ms}, \text{ceil}((3+L_{\text{ind}}) \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(120\text{ms}, \text{ceil}(1.5 \times (3+L_{\text{ind}}) \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}((3+L_{\text{ind}}) \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When DRX is not configured, L_{ind} is the number of SMTC occasions not available at the UE during $T_{\text{SSB_time_index_intra_CCA}}$ for index detection, where $L_{\text{ind}} \leq L_{\text{ind,max}}$. When DRX is configured, L_{ind} is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{\text{SSB_time_index_intra_CCA}}$ for index detection, where $L_{\text{ind}} \leq L_{\text{ind,max}}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $\text{CSSF}_{\text{intra}}$.	
NOTE 3: $L_{\text{ind,max}} = 5$ for $\text{Max}(\text{DRX cycle}, \text{SMTC period}) \leq 40\text{ms}$ where DRX cycle is 0 for non-DRX, $L_{\text{ind,max}} = 3$ for $40\text{ms} < \text{Max}(\text{DRX cycle}, \text{SMTC period}) \leq 320\text{ms}$, $L_{\text{ind,max}} = 2$ for DRX cycle $> 320\text{ms}$.	
NOTE 4: Upon exceeding $L_{\text{ind,max}}$ over the period of time $T_{\text{SSB_time_index_intra_CCA}}$, the UE has to restart the time index detection procedure.	

Table 9.2A.5.1-3: Time period for PSS/SSS detection, deactivated SCell (FR1)

Condition	$T_{PSS/SSS_sync_intra_CCA}$
No DRX	$(5 + L_{PSS/SSS,deact}) \times measCycleSCell \times CSSF_{intra}$
DRX cycle $\leq 320ms$	$(5 + L_{PSS/SSS,deact}) \times \max(measCycleSCell, 1.5 \times DRX \text{ cycle}) \times CSSF_{intra}$
DRX cycle $> 320ms$	$(5 + L_{PSS/SSS,deact}) \times \max(measCycleSCell, DRX \text{ cycle}) \times CSSF_{intra}$
NOTE 1: When DRX is not configured, $L_{PSS/SSS,deact}$ is the number of SMTC occasions not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,deact} < L_{PSS/SSS,deact,max}$. When DRX is configured, $L_{PSS/SSS,deact}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,deact} < L_{PSS/SSS,deact,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement cycles, the UE is not required to determine the availability of SMTC occasions more frequent than once per measurement cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$. NOTE 2: $L_{PSS/SSS,deact,max} = 7$ for non-DRX, $L_{PSS/SSS,deact,max} = 5$ for $40ms < \max(DRX \text{ cycle}, measCycleSCell) \leq 320ms$, $L_{PSS/SSS,deact,max} = 3$ for $\max(DRX \text{ cycle}, measCycleSCell) > 320ms$. NOTE 3: Upon exceeding $L_{PSS/SSS,deact,max}$, the UE is not required to meet the requirements for PSS/SSS detection.	

Table 9.2A.5.1-4: Time period for time index detection, deactivated SCell (FR1)

Condition	$T_{SSB_time_index_intra_CCA}$
No DRX	$(3 + L_{ind,deact}) \times measCycleSCell \times CSSF_{intra}$
DRX cycle $\leq 320ms$	$(3 + L_{ind,deact}) \times \max(measCycleSCell, 1.5 \times DRX \text{ cycle}) \times CSSF_{intra}$
DRX cycle $> 320ms$	$(3 + L_{ind,deact}) \times \max(measCycleSCell, DRX \text{ cycle}) \times CSSF_{intra}$
NOTE 1: When DRX is not configured, $L_{ind,deact}$ is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind,deact} < L_{ind,deact,max}$. When DRX is configured, $L_{ind,deact}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind,deact} < L_{ind,deact,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement cycles, the UE is not required to determine the availability of SMTC occasions more frequent than once per measurement cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{intra}$. NOTE 2: $L_{ind,deact,max} = 5$ for non-DRX, $L_{ind,deact,max} = 3$ for $40ms < \max(DRX \text{ cycle}, measCycleSCell) \leq 320ms$, $L_{ind,deact,max} = 2$ for $\max(DRX \text{ cycle}, measCycleSCell) > 320ms$. NOTE 3: Upon exceeding $L_{ind,deact,max}$ over the period of time $T_{SSB_time_index_intra_CCA}$, the UE has to restart the time index detection procedure.	

Table 9.2A.5.1-5: Time period for PSS/SSS detection, (Frequency range FR2-2)

Condition	$T_{PSS/SSS_sync_intra_CCA}$
No DRX	$\max(600ms, \text{ceil}((M_{pss/sss_sync_w/o_gaps_CCA} \times K_{FR} + N \times L_{PSS/SSS}) \times K_p \times K_{layer1_measurement}) \times SMTC \text{ period})^{Note 1} \times CSSF_{intra}$
DRX cycle $\leq 320ms$	$\max(600ms, \text{ceil}(1.5 \times (M_{pss/sss_sync_w/o_gaps_CCA} \times K_{FR} + N \times L_{PSS/SSS}) \times K_p \times K_{layer1_measurement}) \times \max(SMTC \text{ period}, DRX \text{ cycle})) \times CSSF_{intra}$
DRX cycle $> 320ms$	$\text{ceil}((M_{pss/sss_sync_w/o_gaps_CCA} \times K_{FR} + N \times L_{PSS/SSS}) \times K_p \times K_{layer1_measurement}) \times DRX \text{ cycle} \times CSSF_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 2: When DRX is not configured, $L_{PSS/SSS}$ is the number of SMTC occasion groups not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS} < L_{PSS/SSS,max}$. A SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{PSS/SSS}$ is the number of [DRX cycle groups] in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS} < L_{PSS/SSS,max}$. [A [DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When	

	configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle.
NOTE 3:	$L_{PSS/SSS,max} = [7]$ for $\text{Max}(\text{DRX cycle}, \text{SMTC period}) \leq 40\text{ms}$ where DRX cycle is 0 for non-DRX, $L_{PSS/SSS,max} = [5]$ for $40\text{ms} < \text{Max}(\text{DRX cycle}, \text{SMTC period}) \leq 320\text{ms}$, $L_{PSS/SSS,max} = [3]$ for DRX cycle $> 320\text{ms}$.
NOTE 4:	Upon exceeding $L_{PSS/SSS,max}$, the UE is not required to meet the requirements for PSS/SSS detection.
NOTE 5:	K_{FR} is a scaling factor depending on the frequency range and SSB SCS. $K_{FR} = 1$ if the SCS of the SSB of the cell being detected is 120 kHz, $K_{FR} = 2$ if the SCS of the SSB of the cell being detected is 480 kHz, and $K_{FR} = 3$ if the SCS of the SSB of the cell being detected is 960 kHz.

Table 9.2A.5.1-6: Time period for PSS/SSS detection, deactivated SCell (FR2-2)

DRX cycle	$T_{PSS/SSS_sync_intra_CCA}$
No DRX	$\text{Ceil}((M_{pss/sss_sync_w/o_gaps} \times K_{FR} + N \times L_{PSS/SSS,deact}) \times K_p) \times \text{measCycleSCell} \times \text{CSSF}_{intra}$
DRX cycle $\leq 320\text{ms}$	$\text{Ceil}((M_{pss/sss_sync_w/o_gaps} \times K_{FR} + N \times L_{PSS/SSS,deact}) \times K_p) \times \text{max}(\text{measCycleSCell}, 1.5 \times \text{DRX cycle}) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}((M_{pss/sss_sync_w/o_gaps} \times K_{FR} + N \times L_{PSS/SSS,deact}) \times K_p) \times \text{max}(\text{measCycleSCell}, \text{DRX cycle}) \times \text{CSSF}_{intra}$
NOTE 1: When DRX is not configured, $L_{PSS/SSS,deact}$ is the number of SMTC occasions groups not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,deact} < L_{PSS/SSS,deact,max}$. A SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{PSS/SSS,deact}$ is the number of [DRX cycle groups] in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,deact} < L_{PSS/SSS,deact,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. [A DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When configured with measurement cycles, the UE is not required to determine the availability of SMTC occasions more frequent than once per measurement cycle.	
NOTE 2: $L_{PSS/SSS,deact,max} = [7]$ for $\text{Max}(\text{DRX cycle}, \text{measCycleSCell}) \leq 40\text{ms}$ where DRX cycle is 0 for non-DRX, $L_{PSS/SSS,deact,max} = [5]$ for $40\text{ms} < \text{Max}(\text{DRX cycle}, \text{measCycleSCell}) \leq 320\text{ms}$, $L_{PSS/SSS,deact,max} = [3]$ for DRX cycle $> 320\text{ms}$.	
NOTE 3: Upon exceeding $L_{PSS/SSS,deact,max}$, the UE is not required to meet the requirements for PSS/SSS detection.	
NOTE 4: Void	
NOTE 5: K_{FR} is a scaling factor depending on the frequency range and SSB SCS. $K_{FR} = 1$ if the SCS of the SSB of the cell being detected is 120 kHz, $K_{FR} = 2$ if the SCS of the SSB of the cell being detected is 480 kHz, and $K_{FR} = 3$ if the SCS of the SSB of the cell being detected is 960 kHz.	

Table 9.2A.5.1-7: Time period for time index detection (FR2-2)

DRX cycle	$T_{SSB_time_index_intra_CCA}$
No DRX	$\text{Max}(200\text{ms}, \text{ceil}((M_{ssb_index_intra_CCA} + N \times L_{ind}) \times K_p) \times \text{SMTC period}) \times \text{CSSF}_{intra}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(200\text{ms}, \text{ceil}(1.5 \times ((M_{ssb_index_intra} + N \times L_{ind}) \times K_p) \times \text{Max}(\text{SMTC period}, \text{DRX cycle}))) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$\text{ceil}((M_{ssb_index_intra} + N \times L_{ind}) \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When DRX is not configured, L_{ind} is the number of SMTC occasion groups not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind} \leq L_{ind,max}$. When DRX is configured, L_{ind} is the number of DRX cycles groups in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind} \leq L_{ind,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle.	
NOTE 3: $L_{ind,max} = 5$ for $\text{Max}(\text{DRX cycle}, \text{SMTC period}) \leq 40\text{ms}$ where DRX cycle is 0 for non-DRX, $L_{ind,max} = 3$ for $40\text{ms} < \text{Max}(\text{DRX cycle}, \text{SMTC period}) \leq 320\text{ms}$, $L_{ind,max} = 2$ for DRX cycle $> 320\text{ms}$.	
NOTE 4: Upon exceeding $L_{ind,max}$ over the period of time $T_{SSB_time_index_intra_CCA}$, the UE has to restart the time index detection procedure.	

Table 9.2A.5.1-8: Time period for time index detection, deactivated SCell (FR2-2)

DRX cycle	$T_{SSB_time_index_intra_CCA}$
No DRX	$\text{Max}(200\text{ms}, \text{ceil}((M_{SSB_index_intra_CCA} + N \times L_{ind,deact}) \times K_p) \times \text{SMTC period}) \times \text{CSSF}_{intra}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(200\text{ms}, \text{ceil}(1.5 \times ((M_{SSB_index_intra} + N \times L_{ind,deact}) \times K_p) \times \text{Max}(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$\text{ceil}((M_{SSB_index_intra} + N \times L_{ind,deact}) \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When DRX is not configured, $L_{ind,deact}$ is the number of SMTC occasion groups not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind,deact} \leq L_{ind,deact,max}$. When DRX is configured, $L_{ind,deact}$ is the number of DRX cycles groups in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection, where $L_{ind,deact} \leq L_{ind,deact,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle.	
NOTE 3: $L_{ind,deact,max} = 5$ for $\text{Max}(\text{DRX cycle}, \text{SMTC period}) \leq 40\text{ms}$ where DRX cycle is 0 for non-DRX, $L_{ind,deact,max} = 3$ for $40\text{ms} < \text{Max}(\text{DRX cycle}, \text{SMTC period}) \leq 320\text{ms}$, $L_{ind,deact,max} = 2$ for DRX cycle $> 320\text{ms}$.	
NOTE 4: Upon exceeding $L_{ind,deact,max}$ over the period of time $T_{SSB_time_index_intra_CCA}$, the UE has to restart the time index detection procedure.	

9.2A.5.2 Measurement period

The measurement period for intra-frequency measurements without gaps is as shown in table 9.2A.5.2-1, 9.2A.5.2-2 (deactivated SCell).

If SCG DRX is in use, intra-frequency measurement period requirements specified in Table 9.2A.5.2-1, Table 9.2A.5.2-2 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

The requirements apply provided any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known defined in clause 9.2A.4.3.

When the time period of unsuccessful measurement attempts due to exceeding the maximum number of unavailable at the UE SMTC occasions of an already identified cell exceeds the maximum time requirement for the cell to remain known defined in clause 9.2A.4.3, UE shall stop the measurement attempts on this SSB and perform the detection procedure again like for any other SSB.

Table 9.2A.5.2-1: Measurement period for intra-frequency measurements without gaps (FR1)

Condition	$T_{SSB_measurement_period_intra_CCA}$
No DRX	$\text{max}(200\text{ms}, \text{ceil}((5+L_{meas}) \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{intra}$
DRX cycle $\leq 320\text{ms}$	$\text{max}(200\text{ms}, \text{ceil}(1.5 \times (5+L_{meas}) \times K_p) \times \text{max}(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{intra}$
DRX cycle $> 320\text{ms}$	$\text{ceil}((5+L_{meas}) \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{intra}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When DRX is not configured, L_{meas} is the number of SMTC occasions not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas} < L_{meas,max}$. When DRX is configured, L_{meas} is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas} < L_{meas,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by CSSF_{intra} .	
NOTE 3: $L_{meas,max} = 7$ for $\text{Max}(\text{DRX cycle}, \text{SMTC period}) \leq 40\text{ms}$ where DRX cycle is 0 for non-DRX, $L_{meas,max} = 5$ for $40\text{ms} < \text{Max}(\text{DRX cycle}, \text{SMTC period}) \leq 320\text{ms}$, $L_{meas,max} = 3$ for DRX cycle $> 320\text{ms}$.	
NOTE 4: Upon exceeding $L_{meas,max}$ over the period of time $T_{SSB_measurement_period_intra_CCA}$, the UE has to restart the measurement procedure.	

Table 9.2A.5.2-2: Measurement period for intra-frequency measurements without gaps, deactivated SCell (FR1)

Condition	$T_{SSB_measurement_period_intra_CCA}$
No DRX	$(5+L_{meas,deact}) \times measCycleSCell \times CSSF_{intra}$
DRX cycle $\leq 320ms$	$(5+L_{meas,deact}) \times \max(measCycleSCell, 1.5 \times DRX\ cycle) \times CSSF_{intra}$
DRX cycle $> 320ms$	$(5+L_{meas,deact}) \times \max(measCycleSCell, DRX\ cycle) \times CSSF_{intra}$
NOTE 1: When DRX is not configured, $L_{meas,deact}$ is the number of SMTTC occasions not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas,deact} < L_{meas,deact,max}$. When DRX is configured, $L_{meas,deact}$ is the number of DRX cycles in which at least one SMTTC occasion is not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas,deact} < L_{meas,deact,max}$. When configured with DRX, the UE is not required to determine the availability of SMTTC occasions more frequent than once per DRX cycle. When configured with measurement cycles, the UE is not required to determine the availability of SMTTC occasions more frequent than once per measurement cycle. FFS: The UE is not required to determine the availability of SMTTC occasions more frequent than what is required by $CSSF_{intra}$. NOTE 2: $L_{meas,deact,max} = 7$ for non-DRX, $L_{meas,deact,max} = 5$ for $40ms < \max(DRX\ cycle, measCycleSCell) \leq 320ms$, $L_{meas,deact,max} = 3$ for $\max(DRX\ cycle, measCycleSCell) > 320ms$. NOTE 3: Upon exceeding $L_{meas,deact,max}$ over the period of time $T_{SSB_measurement_period_intra_CCA}$, the UE has to restart the measurement procedure.	

Table 9.2A.5.2-3: Measurement period for intra-frequency measurements without gaps (FR2-2)

DRX cycle	$T_{SSB_measurement_period_intra_CCA}$
No DRX	$\max(400ms, \text{ceil}((M_{meas_period_w/o_gaps_CCA} + N \times L_{meas}) \times K_p \times K_{layer1_measurement}) \times SMTTC\ period) \times CSSF_{intra}$
DRX cycle $\leq 320ms$	$\max(400ms, \text{ceil}(1.5 \times (M_{meas_period_w/o_gaps_CCA} + N \times L_{meas}) \times K_p \times K_{layer1_measurement}) \times \max(SMTTC\ period, DRX\ cycle)) \times CSSF_{intra}$
DRX cycle $> 320ms$	$\text{ceil}((M_{meas_period_w/o_gaps_CCA} + N \times L_{meas}) \times K_p \times K_{layer1_measurement}) \times DRX\ cycle \times CSSF_{intra}$
NOTE 1: If different SMTTC periodicities are configured for different cells, the SMTTC period in the requirement is the one used by the cell being identified NOTE 2: When DRX is not configured, L_{meas} is the number of SMTTC occasion groups not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas} < L_{meas,max}$. A SMTTC occasion group consists of N consecutive SMTTC occasions. An SMTTC occasion group is not available, when at least one SMTTC occasion in the group is not transmitted by the gNB. When DRX is configured, L_{meas} is the number of [DRX cycle groups] in which at least one SMTTC occasion is not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas} < L_{meas,max}$. [A DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTTC occasion in the group is not transmitted by the gNB.] When configured with DRX, the UE is not required to determine the availability of SMTTC occasions more frequent than once per DRX cycle. NOTE 3: $L_{meas,max} = [7]$ for $\max(DRX\ cycle, SMTTC\ period) \leq 40ms$ where DRX cycle is 0 for non-DRX, $L_{meas,max} = [5]$ for $40ms < \max(DRX\ cycle, SMTTC\ period) \leq 320ms$, $L_{meas,max} = [3]$ for DRX cycle $> 320ms$. NOTE 4: Upon exceeding $L_{meas,max}$ over the period of time $T_{SSB_measurement_period_intra_CCA}$, the UE has to restart the measurement procedure.	

Table 9.2.5.2-4: Measurement period for intra-frequency measurements without gaps, deactivated SCell (FR2-2)

DRX cycle	$T_{SSB_measurement_period_intra_CCA}$
No DRX	$\text{Ceil}((M_{meas_period_w/o_gaps_CCA} + N \times L_{meas,deact}) \times K_p) \times measCycleSCell \times CSSF_{intra}$
DRX cycle $\leq 320ms$	$\text{Ceil}((M_{meas_period_w/o_gaps_CCA} + N \times L_{meas,deact}) \times K_p) \times \max(measCycleSCell, 1.5 \times DRX\ cycle) \times CSSF_{intra}$
DRX cycle $> 320ms$	$\text{Ceil}((M_{meas_period_w/o_gaps_CCA} + N \times L_{meas,deact}) \times K_p) \times \max(measCycleSCell, DRX\ cycle) \times CSSF_{intra}$
NOTE 1: When DRX is not configured, $L_{meas,deact}$ is the number of SMTTC occasion groups not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas,deact} < L_{meas,deact,max}$. A SMTTC occasion group consists of N consecutive SMTTC occasions. An SMTTC occasion group is not available, when at least one SMTTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{meas,deact}$ is the number of [DRX cycle groups] in which at least one SMTTC occasion is not available at the UE during $T_{SSB_measurement_period_intra_CCA}$ for measurement, where $L_{meas,deact} < L_{meas,deact,max}$.	

,max. [A DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group occasion is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement cycles, the UE is not required to determine the availability of SMTC occasions more frequent than once per measurement cycle. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by CSSF_{intra}.

NOTE 2: $L_{\text{meas, deact, max}} = [7]$ for $\text{Max}(\text{DRX cycle, measCycleSCell}) \leq 40\text{ms}$ where DRX cycle is 0 for non-DRX, $L_{\text{meas, deact, max}} = [5]$ for $40\text{ms} < \text{Max}(\text{DRX cycle, measCycleSCell}) \leq 320\text{ms}$, $L_{\text{meas, deact, max}} = [3]$ for DRX cycle $> 320\text{ms}$.

NOTE 3: Upon exceeding $L_{\text{meas, deact, max}}$ over the period of time $T_{\text{SSB_measurement_period_intra_CCA}}$, the UE has to restart the measurement procedure.

9.2A.5.3 Scheduling availability of UE during intra-frequency measurements

UE shall be capable of measuring without measurement gaps when the SSB is completely contained in the active bandwidth part of the UE. When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols indicated by the union set of *SSB-ToMeasure* from all the configured measurement objects on the same serving carrier which can be merged [2], if it is configured; otherwise, all L SSB symbols within SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

9.2A.5.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols configured to be measured, and on 1 data symbol before each consecutive SSB symbols configured to be measured and 1 data symbol after each consecutive SSB symbols configured to be measured within SMTC window duration if *deriveSSB-IndexFromCell* is enabled. If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, the SMTC periodicity follows *smtc2*; Otherwise SMTC periodicity follows *smtc1*.
- The UE is not expected to transmit PUCCH/PUSCH/SRS on all symbols within SMTC window duration if *deriveSSB-IndexFromCell* is not enabled. If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, the SMTC periodicity follows *smtc2*; Otherwise SMTC periodicity follows *smtc1*.

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols configured to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB configured to be measured/RSSI symbols and 1 data symbol after each consecutive SSB configured to be measured/RSSI symbols within SMTC window duration if *deriveSSB-IndexFromCell* is enabled. If the high layer signaling of *smtc2* is configured (in TS 38.331), the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.
- The UE is not expected to transmit PUCCH/PUSCH/SRS on all symbols within SMTC window duration if *deriveSSB-IndexFromCell* is not enabled. If the high layer in TS 38.331 signaling of *smtc2* is configured, the SMTC periodicity follows *smtc2*; Otherwise SMTC periodicity follows *smtc1*.

When intra-band carrier aggregation in unlicensed spectrum is performed, the scheduling restrictions due to a given serving cell also apply to all other serving cells in the same band on the symbols that fully or partially overlap with the aforementioned restricted symbols.

9.2A.5.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement

- If *deriveSSB-IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each

consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

- If *deriveSSB-IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration.

When intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

9.2A.5.3.3 Scheduling availability of UE performing measurements in TDD bands on FR2-2

The requirements in clause 9.2.5.3.3 apply.

9.2A.6 Intra-frequency measurements with measurement gaps

9.2A.6.1 Intra-frequency cell identification

The UE shall be able to identify a new detectable intra frequency cell within $T_{\text{identify_intra_without_index_CCA}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{\text{identify_intra_with_index_CCA}}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{\text{identify_intra_without_index_CCA}}$.

$$T_{\text{identify_intra_without_index_CCA}} = T_{\text{PSS/SSS_sync_intra_CCA}} + T_{\text{SSB_measurement_period_intra_CCA}} \text{ ms}$$

$$T_{\text{identify_intra_with_index_CCA}} = T_{\text{PSS/SSS_sync_intra_CCA}} + T_{\text{SSB_measurement_period_intra_CCA}} + T_{\text{SSB_time_index_intra_CCA}}$$

Where:

$T_{\text{PSS/SSS_sync_intra_CCA}}$: it is the time period used in PSS/SSS detection given in table 9.2A.6.1-1.

$T_{\text{SSB_time_index_intra_CCA}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2A.6.1-2.

$T_{\text{SSB_measurement_period_intra_CCA}}$: equal to a measurement period of SSB based measurement given in table 9.2A.6.2-1 or 9.2A.6.1-3.

$\text{CSSF}_{\text{intra}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{within_gap},i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

$M_{\text{pss/sss_sync_w/o_gaps_CCA}}$: For a UE supporting FR2-2 power class 1, $M_{\text{pss/sss_sync_w/o_gaps_CCA}} = 60$. For a UE supporting FR2-2 power class 2, $M_{\text{pss/sss_sync_w/o_gaps_CCA}} = 36$. For a UE supporting FR2-2 power class 3, $M_{\text{pss/sss_sync_w/o_gaps_CCA}} = 36$.

$M_{\text{meas_period_w/o_gaps_CCA}}$: For a UE supporting FR2-2 power class 1, $M_{\text{meas_period_w/o_gaps_CCA}} = 60$. For a UE supporting FR2-2 power class 2, $M_{\text{meas_period_w/o_gaps_CCA}} = 36$. For a UE supporting FR2-2 power class 3, $M_{\text{meas_period_w/o_gaps_CCA}} = 36$.

- $M_{\text{SSB_index_intra_CCA}}$: For a UE supporting FR2-2 power class 1, $M_{\text{SSB_index_intra_CCA}} = 72$ samples. For a UE supporting FR2-2 power class 2, $M_{\text{SSB_index_intra_CCA}} = 48$ samples. For a UE supporting FR2 power class 3, $M_{\text{SSB_index_intra_CCA}} = 48$ samples.

N : is the UE Rx beam sweeping scaling factor. $N = 12$.

If MCG DRX is in use, intra-frequency cell identification requirements specified in Table 9.2A.6.1-1, Table 9.2A.6.1-2 and Table 9.2A.6.1-3 shall depend on the MCG DRX cycle. If SCG DRX is in use, intra-frequency cell identification requirements specified in Table 9.2A.6.1-1, Table 9.2A.6.1-2 and Table 9.2A.6.1-3 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

The requirements apply provided any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known defined in clause 9.2A.4.3.

Table 9.2A.6.1-1: Time period for PSS/SSS detection (FR1)

Condition	$T_{PSS/SSS_sync_intra_CCA}$
No DRX	$\max(600\text{ms}, (5+L_{PSS/SSS,gaps}) \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{intra}$
$\text{DRX cycle} \leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(1.5 \times (5+L_{PSS/SSS,gaps})) \times \max(\text{DRX cycle}, \text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{intra}$
$\text{DRX cycle} > 320\text{ms}$	$(5+L_{PSS/SSS,gaps}) \times (\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{intra}$
NOTE 1: When DRX is not configured, $L_{PSS/SSS,gaps}$ is the number of SMTC occasions not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,gaps} < L_{PSS/SSS,gaps,max}$. When DRX is configured, $L_{PSS/SSS,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_intra_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,gaps} < L_{PSS/SSS,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by CSSF_{intra}. NOTE 2: $L_{PSS/SSS,gaps,max} = 7$ for $\text{Max}(\text{DRX cycle}, \text{SMTC period}, \text{MGRP}) \leq 40\text{ms}$ where DRX cycle is 0 for non-DRX, $L_{PSS/SSS,gaps,max} = 5$ for $40\text{ms} < \text{Max}(\text{DRX cycle}, \text{SMTC period}, \text{MGRP}) \leq 320\text{ms}$, $L_{PSS/SSS,gaps,max} = 3$ for $\text{DRX cycle} > 320\text{ms}$. NOTE 3: Upon exceeding $L_{PSS/SSS,gaps,max}$, the UE is not required to meet the requirements for PSS/SSS detection.	

Table 9.2A.6.1-2: Time period for time index detection (FR1)

Condition	$T_{SSB_time_index_intra_CCA}$
No DRX	$\max(120\text{ms}, (3+L_{ind,gaps}) \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{intra}$
$\text{DRX cycle} \leq 320\text{ms}$	$\max(120\text{ms}, \text{ceil}(1.5 \times (3+L_{ind,gaps})) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{intra}$
$\text{DRX cycle} > 320\text{ms}$	$(3+L_{ind,gaps}) \times (\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{intra}$
NOTE 1: When DRX is not configured, $L_{ind,gaps}$ is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection where $L_{ind,gaps} < L_{ind,gaps,max}$. When DRX is configured, $L_{ind,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection where $L_{ind,gaps} < L_{ind,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by CSSF_{intra}. NOTE 2: $L_{ind,gaps,max} = 5$ for $\text{Max}(\text{DRX cycle}, \text{SMTC period}, \text{MGRP}) \leq 40\text{ms}$ where DRX cycle is 0 for non-DRX, $L_{ind,gaps,max} = 3$ for $40\text{ms} < \text{Max}(\text{DRX cycle}, \text{SMTC period}, \text{MGRP}) \leq 320\text{ms}$, $L_{ind,gaps,max} = 2$ for $\text{DRX cycle} > 320\text{ms}$. NOTE 3: Upon exceeding $L_{ind,gaps,max}$ over the $T_{SSB_time_index_intra_CCA}$ period of time, the UE has to restart the time index detection procedure.	

Table 9.2A.6.1-3: Time period for PSS/SSS detection (FR2-2)

DRX cycle	$T_{PSS/SSS_sync_intra_CCA}$
No DRX	$\max(600\text{ms}, (M_{pss/sss_sync_with_gaps_CCA} \times K_{FR} + N \times L_{ind,gaps}) \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{intra}$
$\text{DRX cycle} \leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(1.5 \times (M_{pss/sss_sync_with_gaps_CCA} \times K_{FR} + N \times L_{ind,gaps})) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{intra}$
$\text{DRX cycle} > 320\text{ms}$	$(M_{pss/sss_sync_with_gaps_CCA} \times K_{FR} + N \times L_{ind,gaps}) \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{intra}$
NOTE 1: When DRX is not configured, $L_{ind,gaps}$ is the number of SMTC occasion groups not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection where $L_{ind,gaps} < L_{ind,gaps,max}$. A SMTC occasion group consists of N consecutive SMTC occasions. A SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{ind,gaps}$ is the number of [DRX cycle groups] in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_intra_CCA}$ for index detection where $L_{ind,gaps} < L_{ind,gaps,max}$. [A DRX occasion group consists of N consecutive DRX cycles. A DRX occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per	

	DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP.
NOTE 2:	$L_{\text{ind,gaps,max}} = [5]$ for $\text{Max}(\text{DRX cycle, SMTC period, MGRP}) \leq 40\text{ms}$ where DRX cycle is 0 for non-DRX, $L_{\text{ind,gaps,max}} = [3]$ for $40\text{ms} < \text{Max}(\text{DRX cycle, SMTC period, MGRP}) \leq 320\text{ms}$, $L_{\text{ind,gaps,max}} = [2]$ for DRX cycle $> 320\text{ms}$.
NOTE 3:	Upon exceeding $L_{\text{ind,gaps,max}}$ over the $T_{\text{SSB_time_index_intra_CCA}}$ period of time, the UE has to restart the time index detection procedure.
NOTE 4:	K_{FR} is a scaling factor depending on the frequency range and SSB SCS. $K_{\text{FR}} = 1$ if the SCS of the SSB of the cell being detected is 120 kHz, $K_{\text{FR}} = 2$ if the SCS of the SSB of the cell being detected is 480 kHz, and $K_{\text{FR}} = 3$ if the SCS of the SSB of the cell being detected is 960 kHz.

Table 9.2A.5.1-7: Time period for time index detection (FR2-2)

DRX cycle	$T_{\text{SSB_time_index_intra_CCA}}$
No DRX	$\text{Max}(200\text{ms}, \text{ceil}((M_{\text{SSB_index_intra}} + (L_{\text{ind,gaps}} \times N)) \times K_p) \times \text{Max}(\text{MGRP, SMTC period})) \times \text{CSSF}_{\text{intra}}$
DRX cycles $\leq 320\text{ms}$	$\text{Max}(200\text{ms}, \text{ceil}(1.5 \times (M_{\text{SSB_index_intra}} + (L_{\text{ind,gaps}} \times N)) \times K_p) \times \text{Max}(\text{MGRP, SMTC period, DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{ceil}((M_{\text{SSB_index_intra}} + (L_{\text{ind,gaps}} \times N)) \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: When DRX is not configured, L_{ind} is the number of SMTC occasion groups not available at the UE during $T_{\text{SSB_time_index_intra_CCA}}$ for index detection, where $L_{\text{ind,gaps}} \leq L_{\text{ind,gaps,max}}$. When DRX is configured, $L_{\text{ind,gaps}}$ is the number of DRX cycles groups in which at least one SMTC occasion is not available at the UE during $T_{\text{SSB_time_index_intra_CCA}}$ for index detection, where $L_{\text{ind,gaps}} \leq L_{\text{ind,gaps,max}}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle.	
NOTE 3: $L_{\text{ind,gaps,max}} = 5$ for $\text{Max}(\text{DRX cycle, SMTC period}) \leq 40\text{ms}$ where DRX cycle is 0 for non-DRX, $L_{\text{ind,gaps,max}} = 3$ for $40\text{ms} < \text{Max}(\text{DRX cycle, SMTC period}) \leq 320\text{ms}$, $L_{\text{ind,max}} = 2$ for DRX cycle $> 320\text{ms}$.	
NOTE 4: Upon exceeding $L_{\text{ind,gaps,max}}$ over the period of time $T_{\text{SSB_time_index_intra_CCA}}$, the UE has to restart the time index detection procedure.	

9.2A.6.2 Intra-frequency Measurement Period

The measurement period for intra-frequency measurements with gaps is as shown in table 9.2A.6.2-1.

If MCG DRX is in use, intra-frequency cell identification requirements specified in Table 9.2A.6.2-1 and 9.2A.6.2-2 shall depend on the MCG DRX cycle. If SCG DRX is in use, intra-frequency measurement period requirements specified in Table 9.2A.6.2-1 and 9.2A.6.2-2 shall depend on the SCG DRX cycle. Otherwise, the requirements for when DRX is not in use shall apply.

The requirements apply provided any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known defined in clause 9.2A.4.3.

When the time period of unsuccessful measurement attempts due to exceeding the maximum number of unavailable at the UE SMTC occasions of an already identified cell exceeds the maximum time requirement for the cell to remain known defined in clause 9.2A.4.3, UE shall stop the measurement attempts on this SSB and perform the detection procedure again like for any other SSB.

Table 9.2A.6.2-1: Measurement period for intra-frequency measurements with gaps (FR1)

Condition	$T_{\text{SSB_measurement_period_intra_CCA}}$
No DRX	$\text{max}(200\text{ms}, (5 + L_{\text{meas,gaps}}) \times \text{max}(\text{MGRP, SMTC period})) \times \text{CSSF}_{\text{intra}}$
DRX cycles $\leq 320\text{ms}$	$\text{max}(200\text{ms}, \text{ceil}(1.5 \times (5 + L_{\text{meas,gaps}})) \times \text{max}(\text{MGRP, SMTC period, DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$(5 + L_{\text{meas,gaps}}) \times (\text{MGRP, DRX cycle}) \times \text{CSSF}_{\text{intra}}$
NOTE 1: When DRX is not configured, $L_{\text{meas,gaps}}$ is the number of SMTC occasions not available at the UE during $T_{\text{SSB_time_index_intra_CCA}}$ for measurement where $L_{\text{meas,gaps}} < L_{\text{meas,gaps,max}}$. When DRX is configured, $L_{\text{meas,gaps}}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{\text{SSB_time_index_intra_CCA}}$ for measurement where $L_{\text{meas,gaps}} < L_{\text{meas,gaps,max}}$. When configured with	

NOTE 2:	DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by CSSF_{intra}. $L_{\text{meas,gaps,max}} = 7$ for $\text{Max}(\text{DRX cycle, SMTC period, MGRP}) \leq 40\text{ms}$ where DRX cycle is 0 for non-DRX, $L_{\text{meas,gaps,max}} = 5$ for $40\text{ms} < \text{Max}(\text{DRX cycle, SMTC period, MGRP}) \leq 320\text{ms}$, $L_{\text{meas,gaps,max}} = 3$ for DRX cycle $> 320\text{ms}$.
NOTE 3:	Upon exceeding $L_{\text{meas,gaps,max}}$ over the $T_{\text{SSB_measurement_period_intra_CCA}}$ period of time, the UE has to restart the measurement procedure.

Table 9.2A.6.2-2: Measurement period for intra-frequency measurements with gaps (FR2-2)

DRX cycle	$T_{\text{SSB_measurement_period_intra_CCA}}$
No DRX	$\max(400\text{ms}, (M_{\text{meas_period with_gaps_CCA}} + N \times L_{\text{meas,gaps}}) \times \max(\text{MGRP, SMTC period})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(400\text{ms}, \text{ceil}(1.5 \times (M_{\text{meas_period with_gaps_CCA}} + N \times L_{\text{meas,gaps}})) \times \max(\text{MGRP, SMTC period, DRX cycle})) \times \text{CSSF}_{\text{intra}}$ Note 1
DRX cycle $> 320\text{ms}$	$(M_{\text{meas_period with_gaps_CCA}} + N \times L_{\text{meas,gaps}}) \times \max(\text{MGRP, DRX cycle}) \times \text{CSSF}_{\text{intra}}$
NOTE 1:	
NOTE 2:	
NOTE 3:	

9.2A.7 Intra-frequency RSSI and Channel occupancy measurements

9.2A.7.1 Intra-frequency RSSI measurements

An RSSI measurement is defined as an intra-frequency measurement provided that the RSSI measurement bandwidth is fully contained within the current carrier bandwidth of the UE.

The UE physical layer shall be capable of performing the RSSI measurements, defined in TS 38.215 [4] on one or more serving carriers operating with CCA, TS 37.213 [33], if the carrier(s) are indicated by higher layers [2], and report the RSSI measurements to higher layers. The UE physical layer shall provide to higher layers a single RSSI sample for each OFDM symbol within each configured RSSI measurement duration [2] occurring with a configured RSSI measurement timing configuration periodicity [2], *rmtec-Periodicity*.

The UE can perform RSSI measurements without measurement gaps if RSSI measurement bandwidth is fully within the active DL BWP of the UE.

For performing intra-frequency RSSI measurement in FR2-2, UE shall assume the configured RSSI measurement resources are QCL-ed with TypeD to the DL RS associated with the TCI state provided in the RMTC configuration. UE does not expect to be configured with an explicit TCI-state in RMTC-Config with a reference serving cell in FR1 or FR2-1. If no TCI state is provided in the RMTC configuration, UE shall assume the configured RSSI measurement resources are QCL-ed with TypeD to one of the latest received PDSCH and the latest monitored CORESET in the active BWP of the current carrier in FR2-2.

For RSSI measurement in FR2-2 with SCS of 480 kHz or 960 kHz, the RSSI measurement results shall be derived based on symbols configured by RMTC except for the first symbol and the last symbol in RMTC, and there is no requirement when *measDurationSymbols* is configured as 1.

The measurement period for intra-frequency RSSI measurements without measurement gaps is as shown in Table 9.2A.7.1-1 and Table 9.2A.7.1-2, for FR1, and in Table 9.2A.7.4-1 and Table 9.2A.7.5-1 for FR2-2. The measurement period for intra-frequency RSSI measurements with measurement gaps is as shown in Table 9.2A.7.1-3, for FR1 and in Table 9.2A.7.1-6 for FR2-2.

Table 9.2A.7.1-1: Measurement period for intra-frequency RSSI measurements without measurement gaps when SMTC and RMTC are overlapping (FR1)

Condition ^{NOTE1,2}	$T_{RSSI_measurement_period_intra_cca}$
No DRX	$\max(reportInterval, rmtc-Periodicity * CSSF_{outside_gap,i})$
DRX	$\max(reportInterval, \max(rmtc-Periodicity, DRX\ cycle) * CSSF_{outside_gap,i})$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: $CSSF_{outside_gap,i}$ is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in clause 9.1.5.1 for measurement conducted outside measurement gap.	

Table 9.2A.7.1-2: Measurement period for intra-frequency RSSI measurements without measurement gaps when SMTC and RMTC are not overlapping (FR1)

Condition ^{NOTE1,2}	$T_{RSSI_measurement_period_intra_cca}$
No DRX	$\max(reportInterval, N_{intra-MO} * rmtc-Periodicity)$
DRX	$\max(reportInterval, N_{intra-MO} * \max(rmtc-Periodicity, DRX\ cycle\ length))$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: $N_{intra-MO}$ is defined as the number of measurement objects that can be measured without gaps	

Table 9.2A.7.1-3: Measurement period for intra-frequency RSSI measurements with measurement gaps (FR1)

Condition ^{NOTE1,2}	$T_{RSSI_measurement_period_intra_cca}$
No DRX	$\max(reportInterval, \max(rmtc-Periodicity, MGRP) \times CSSF_{intra})$
DRX	$\max(reportInterval, \max(rmtc-Periodicity, MGRP, DRX\ cycle\ length) \times CSSF_{intra})$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: $CSSF_{intra}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.	

Table 9.2A.7.1-4: Measurement period for intra-frequency RSSI measurements without measurement gaps when SMTC and RMTC are overlapping (FR2-2)

Condition ^{NOTE1,2}	$T_{RSSI_measurement_period_intra_cca}$
No DRX	$\max(reportInterval, rmtc-Periodicity * CSSF_{outside_gap,i})$
DRX	$\max(reportInterval, \max(rmtc-Periodicity, DRX\ cycle) * CSSF_{outside_gap,i})$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: $CSSF_{outside_gap,i}$ is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in clause 9.1.5.1 for measurement conducted outside measurement gap.	

Table 9.2A.7.1-5: Measurement period for intra-frequency RSSI measurements without measurement gaps when SMTC and RMTC are not overlapping (FR2-2)

Condition ^{NOTE1,2}	$T_{RSSI_measurement_period_intra_cca}$
No DRX	$\max(reportInterval, N_{intra-MO} * rmtc-Periodicity)$
DRX	$\max(reportInterval, N_{intra-MO} * \max(rmtc-Periodicity, DRX\ cycle))$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: $N_{intra-MO}$ is defined as the number of measurement objects that can be measured without gaps	

Table 9.2A.7.1-6: Measurement period for intra-frequency RSSI measurements with measurement gaps (FR2-2)

Condition ^{NOTE1,2}	$T_{RSSI_measurement_period_intra_cca}$
No DRX	$\max(reportInterval, \max(rmtc-Periodicity, MGRP) \times CSSF_{intra})$
DRX	$\max(reportInterval, \max(rmtc-Periodicity, MGRP, DRX\ cycle) \times CSSF_{intra})$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: $CSSF_{intra}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.	

If the UE requires measurement gaps to perform intra-frequency measurements, a single measurement gap pattern is used for all concurrent intra-frequency measurements, including intra-frequency RSSI measurements. The RSSI measurement duration and the measurement gap shall be aligned, and the following additional condition shall be fulfilled:

- Entire RSSI measurement duration is contained in the measurement gap.

The RSSI measurement performed and reported according to this clause shall meet the RSSI measurement accuracy requirement in Clause 10.1.34.1. The reported RSSI measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in Clause 10.1.34.3.

9.2A.7.2 Intra-frequency Channel occupancy measurements

The UE shall be capable of estimating the channel occupancy on one or more serving carrier frequencies indicated by higher layers [2], based on RSSI samples provided by the physical layer.

The UE can perform channel occupancy measurements without measurement gaps if RSSI measurement bandwidth is fully within the active DL BWP of the UE.

The measurement period for intra-frequency channel occupancy measurements without measurement gap is as shown in Table 9.2A.7.2-1 and Table 9.2A.7.1-2 for FR1, and in Table 9.2A.7.2-4 and Table 9.2A.7.1-5 for FR2-2. The measurement period for intra-frequency RSSI measurements with measurement gaps is as shown in Table 9.2A.7.2-3 for FR1, and in Table 9.2A.7.2-6 for FR2-2.

Table 9.2A.7.2-1: Measurement period for intra-frequency Channel Occupancy measurements without measurement gaps when SMTC and RMTC are overlapping (FR1)

Condition ^{NOTE1,2}	$T_{RSSI_measurement_period_intra_cca}$
No DRX	$\max(reportInterval, rmtc-Periodicity * CSSF_{outside_gap,i})$
DRX	$\max(reportInterval, \max(rmtc-Periodicity, DRX\ cycle) * CSSF_{outside_gap,i})$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: $CSSF_{outside_gap,i}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.1 for measurement conducted outside measurement gap.	

Table 9.2A.7.2-2: Measurement period for intra-frequency Channel Occupancy measurements without measurement gaps when SMTC and RMTC are not overlapping (FR1)

Condition ^{NOTE1,2}	$T_{RSSI_measurement_period_intra_cca}$
No DRX	$\max(reportInterval, N_{intra-MO} * rmtc-Periodicity)$
DRX	$\max(reportInterval, N_{intra-MO} * \max(rmtc-Periodicity, DRX\ cycle\ length))$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: $N_{intra-MO}$ is defined as the number of measurement objects that can be measured without gaps	

Table 9.2A.7.2-3: Measurement period for intra-frequency Channel Occupancy measurements with measurement gaps (FR1)

Condition ^{NOTE1,2}	$T_{RSSI_measurement_period_intra_cca}$
No DRX	$\max(reportInterval, \max(rmtc-Periodicity, MGRP) \times CSSF_{intra})$
DRX	$\max(reportInterval, \max(rmtc-Periodicity, MGRP, DRX\ cycle\ length) \times CSSF_{intra})$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: $CSSF_{intra}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.	

Table 9.2A.7.2-4: Measurement period for intra-frequency Channel Occupancy measurements without measurement gaps when SMTC and RMTC are overlapping (FR2-2)

Condition ^{NOTE1,2}	$T_{RSSI_measurement_period_intra_cca}$
No DRX	$\max(reportInterval, rmtc-Periodicity * CSSF_{outside_gap,i})$
DRX	$\max(reportInterval, \max(rmtc-Periodicity, DRX\ cycle) * CSSF_{outside_gap,i})$

NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1
 NOTE 2: $CSSF_{outside_gap,i}$ is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in clause 9.1.5.1 for measurement conducted outside measurement gap.

Table 9.2A.7.2-5: Measurement period for intra-frequency Channel Occupancy measurements without measurement gaps when SMTC and RMTC are not overlapping (FR2-2)

Condition ^{NOTE1,2}	T _{RSSI measurement period intra cca}
No DRX	$\max(\text{reportInterval}, N_{\text{intra-MO}} \cdot \text{rmtc-Periodicity})$
DRX	$\max(\text{reportInterval}, N_{\text{intra-MO}} \cdot \max(\text{rmtc-Periodicity}, \text{DRX cycle}))$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: $N_{\text{intra-MO}}$ is defined as the number of measurement objects that can be measured without gaps	

Table 9.2A.7.2-6: Measurement period for intra-frequency Channel Occupancy measurements with measurement gaps (FR2-2)

Condition ^{NOTE1,2}	T _{RSSI measurement period intra cca}
No DRX	$\max(\text{reportInterval}, \max(\text{rmtc-Periodicity}, \text{MGRP}) \times CSSF_{\text{intra}})$
DRX	$\max(\text{reportInterval}, \max(\text{rmtc-Periodicity}, \text{MGRP}, \text{DRX cycle}) \times CSSF_{\text{intra}})$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: $CSSF_{\text{intra}}$ is a carrier specific scaling factor and is determined according to $CSSF_{\text{within_gap},i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.	

If the UE requires measurement gaps to perform intra-frequency measurements, a single measurement gap pattern is used for all concurrent intra-frequency measurements, including intra-frequency RSSI measurements. The RSSI measurement duration and the measurement gap shall be aligned, and the following additional condition shall be fulfilled:

- Entire RSSI measurement duration is contained in the measurement gap.

The channel occupancy measurement performed and reported according to this clause shall meet the channel occupancy measurement accuracy requirements in Clause 10.1.35.1. The reported channel occupancy measurement values contained in measurement reports shall be based on the measurement reporting range specified in TS 38.331 [2].

9.2A.7.3 Scheduling restriction during RSSI and Channel Occupancy measurements in FR1

When the UE performs intra-frequency RSSI/CO measurements in unlicensed spectrum, the following restrictions apply due to RSSI/CO measurements:

- The UE is not expected to transmit PUCCH/PUSCH/SRS on UL symbols which are overlapping in time with the RSSI measurement symbols configured by RMTC.

When intra-band carrier aggregation in unlicensed spectrum is performed, the scheduling restrictions due to a given serving cell also apply to all other serving cells in the same band on the symbols that fully or partially overlap with the aforementioned restricted symbols.

9.2A.7.4 Scheduling restriction during RSSI measurements in FR2-2

When the UE performs intra-frequency RSSI measurements in unlicensed spectrum, the following restrictions apply due to RSSI measurements:

- The UE is not expected to transmit PUCCH/PUSCH/SRS on UL symbols which are overlapping in time with the RSSI measurement symbols configured by RMTC.
- The UE is not expected to receive PDCCH/PDSCH/TRS/CSI-RS for CQI on symbols which are overlapping in time with RSSI measurement symbols configured by RMTC if the RSSI measurement resources are not QCL-ed with typeD to the DL RS in the active TCI state of PDCCH/PDSCH.
- For 480 kHz and 960 kHz, The UE is not expected to receive PDCCH/PDSCH/TRS/CSI-RS for CQI on symbols which are overlapping in time with the first and last RSSI measurement symbols configured by RMTC.

When intra-band carrier aggregation in unlicensed spectrum is performed, the scheduling restrictions due to a given serving cell also apply to all other serving cells in the same band on the symbols that fully or partially overlap with the aforementioned restricted symbols.

9.2B NR intra-frequency measurements for RedCap

9.2B.1 Introduction

A measurement is defined as a SSB based intra-frequency measurement provided the centre frequency of the reference SSB of the serving cell and the centre frequency of the SSB of the neighbour cell are the same, and the subcarrier spacing of the two SSBs are also the same. The reference SSB is the SSB defined in BWP-specific *servingCellMO* under *BWP-DownlinkDedicated* of active DL BWP. If the field is absent, the reference SSB is the SSB defined in *servingCellMO* under *ServingCellConfig* [2].

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified intra-frequency cells if carrier frequency information is provided by PCell, even if no explicit neighbour list with physical layer cell identities is provided.

The UE can perform intra-frequency SSB based measurements without measurement gaps if

- the SSB is completely contained in the active BWP of the UE, or
- the active downlink BWP is initial BWP [3].

For intra-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in clause 9.2B.5.3.

SSB based measurements are configured along with one or two measurement timing configuration(s) (SMTC(s)) which provides periodicity, duration and offset information on a window of up to 5ms where the measurements are to be performed. For intra-frequency connected mode measurements, up to two measurement window periodicities may be configured. A single measurement window offset and measurement duration are configured per intra-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB which start earlier than the gap starting time + switching time, nor detect SSB which end later than the gap end – switching time. Switching time is 0.5ms for frequency range FR1 and 0.25ms for frequency range FR2.

9.2B.2 Requirements applicability

The requirements in clause 9.2B apply, provided:

- The cell being identified or measured is detectable.

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- For 2Rx RedCap:
 - SS-RSRP related side conditions given in clauses 10.1.2 and 10.1.3 for FR1 and FR2, respectively, for a corresponding Band,
 - SS-RSRQ related side conditions given in clauses 10.1.7 and 10.1.8 for FR1 and FR2, respectively, for a corresponding Band,
 - SS-SINR related side conditions given in clauses 10.1.12 and 10.1.13 for FR1 and FR2, respectively, for a corresponding Band,
 - SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.2 for a corresponding Band.
- For 1Rx RedCap:
 - SS-RSRP related side conditions given in clauses 10.1A.2 for FR1 for a corresponding Band,
 - SS-RSRQ related side conditions given in clauses 10.1A.2 for FR1 for a corresponding Band,

- SS-SINR related side conditions given in clauses 10.1A.2 for FR1 for a corresponding Band,
- SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.15 for a corresponding Band.

9.2B.3 Number of cells and number of SSB

9.2B.3.1 Requirements for FR1

For each intra-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 8 identified cells, and
- 14 SSBs with different SSB index and/or PCI on the intra-frequency layer, where the number of SSBs in the serving cell is not smaller than the number of configured RLM-RS SSB resources.

9.2B.3.2 Requirements for FR2

For one single intra-frequency layer in a band, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 6 identified cells, and
- 24 SSBs with different SSB index and/or PCI,

where this single intra-frequency layer shall be:

- PCC when UE is configured with SA NR operation mode with PCC in the band.

9.2B.4 Measurement Reporting Requirements

9.2B.4.1 Periodic Reporting

For 2Rx RedCap: The requirements in clause 9.2.4.1 shall apply.

For 1Rx RedCap: Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in periodic measurement reports shall meet the requirements in clauses 10.1A.2.1 (SS-RSRP for FR1), 10.1A.6.1 (SS-RSRQ for FR1) and 10.1A.10.1 (SS-SINR for FR1), respectively.

9.2B.4.2 Event-triggered Periodic Reporting

For 2Rx RedCap: The requirements in clause 9.2.4.2 shall apply.

For 1Rx RedCap: Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.1A.2.1 (SS-RSRP for FR1), 10.1A.6.1 (SS-RSRQ for FR1) and 10.1A.10.1 (SS-SINR for FR1), respectively.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.2B.4.3.

9.2B.4.3 Event Triggered Reporting

For 2Rx RedCap: The requirements in clause 9.2.4.3 shall apply.

For 1Rx RedCap: Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1A.2.1 (SS-RSRP for FR1), 10.1A.6.1 (SS-RSRQ for FR1) and 10.1A.10.1 (SS-SINR for FR1), respectively.

The UE shall not send any event triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the

measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times T_{TI_{DCCH}}$. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{\text{identify_intra_with_index_RedCap}}$ or $T_{\text{identify_intra_without_index_RedCap}}$ defined in clause 9.2B.5.1 or clause 9.2B.6.1. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{\text{identify_intra_without_index_RedCap}}$ or $T_{\text{identify_intra_with_index_RedCap}}$ as defined in clause 9.2B.5.1 or clause 9.2B.6.1. If a cell which has been detectable at least for the time period $T_{\text{identify_intra_without_index_RedCap}}$ or $T_{\text{identify_intra_with_index_RedCap}}$ defined in clause 9.2B.5.1 or clause 9.2B.6.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{\text{SSB_measurement_period_intra_RedCap}}$ provided the timing to that cell has not changed more than $\pm 3200/2^\mu T_c$ while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

9.2B.5 Intra-frequency measurements without measurement gaps

9.2B.5.1 Intra-frequency cell identification

The UE shall be able to identify a new detectable intra-frequency cell within $T_{\text{identify_intra_without_index_RedCap}}$ if the UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{\text{identify_intra_with_index_RedCap}}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{\text{identify_intra_without_index_RedCap}}$. It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{\text{identify_intra_without_index_RedCap}} = (T_{\text{PSS/SSS_sync_intra_RedCap}} + T_{\text{SSB_measurement_period_intra_RedCap}}) \text{ ms}$$

$$T_{\text{identify_intra_with_index_RedCap}} = (T_{\text{PSS/SSS_sync_intra_RedCap}} + T_{\text{SSB_measurement_period_intra_RedCap}} + T_{\text{SSB_time_index_intra_RedCap}}) \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_intra_RedCap}}$: it is the time period used in PSS/SSS detection given in tables 9.2B.5.1-1, 9.2B.5.1-2, 9.2B.5.1-3.

$T_{\text{SSB_time_index_intra_RedCap}}$: it is the time period used to acquire the index of the SSB being measured given in tables 9.2B.5.1-4, 9.2B.5.1-5

$T_{\text{SSB_measurement_period_intra_RedCap}}$: equal to a measurement period of SSB based measurement given in table 9.2B.5.2-1, table 9.2B.5.2-2, table 9.2B.5.2-3.

$\text{CSSF}_{\text{intra_RedCap}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{outside_gap_RedCap},i}$ in clause 9.1A.5.1 for measurement conducted outside measurement gaps, i.e. when intra-frequency SMTC is fully non overlapping or partially overlapping with measurement gaps, or according to $\text{CSSF}_{\text{within_gap_RedCap},i}$ in clause 9.1A.5.2 for measurement conducted within measurement gaps, i.e. when intra-frequency SMTC is fully overlapping with measurement gaps.

If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc2*; Otherwise the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

For 2Rx RedCap:

$M_{\text{pss/sss_sync_w/o_gaps_RedCap}}$: For a UE supporting FR2 power class 1 or 5, $M_{\text{pss/sss_sync_w/o_gaps_RedCap}} = 40$. For a UE supporting power class 2, 3, 4 or 7, $M_{\text{pss/sss_sync_w/o_gaps_RedCap}} = 24$.

$M_{\text{meas_period_w/o_gaps_RedCap}}$: For a UE supporting power class 1 or 5, $M_{\text{meas_period_w/o_gaps_RedCap}} = 40$. For a UE supporting FR2 power class 2, 3, 4, or 7, $M_{\text{meas_period_w/o_gaps_RedCap}} = 24$.

When intra-frequency SMTC is fully non overlapping with measurement gaps or intra-frequency SMTC is fully overlapping with MGs, $K_p = 1$.

When intra-frequency SMTC is partially overlapping with measurement gaps, $K_p = 1/(1 - (\text{SMTC period} / \text{MGRP}))$, where SMTC period < MGRP. For calculation of K_p , if the high layer signalling (TS 38.331 [2]) of *smtc2* is configured, for cells indicated in the *pci-List* parameter in *smtc2*, the SMTC periodicity corresponds to the value of higher layer parameter *smtc2*; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter *smtc1*.

If the higher layer signaling in TS38.331 [2] signalling of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, requirements are not specified for $T_{\text{identify_intra_without_index_RedCap}}$ or $T_{\text{identify_intra_with_index_RedCap}}$

For FR2,

$K_{\text{layer1_measurement}} = 1$,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by intra-frequency SMTC occasions, or
- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by intra-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by the union set of SSB-ToMeasure from all the configured measurement objects on the same serving carrier which can be merged. and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{\text{layer1_measurement}} = 1.5$, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

Table 9.2B.5.1-1: Time period for PSS/SSS detection, (Frequency range FR1) for 2Rx RedCap UE

DRX cycle	$T_{\text{PSS/SSS_sync_intra_RedCap}}$
No DRX	$\max(600\text{ms}, \text{ceil}(5 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $\leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(1.5 \times 5 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(5 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra_RedCap}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.2B.5.1-2: Time period for PSS/SSS detection, (Frequency range FR2) for 2Rx RedCap UE

DRX cycle	$T_{\text{PSS/SSS_sync_intra_RedCap}}$
No DRX	$\max(600\text{ms}, \text{ceil}(M_{\text{pss/sss_sync_w/o_gaps_RedCap}} \times K_p \times K_{\text{layer1_measurement}}) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $\leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(1.5 \times M_{\text{pss/sss_sync_w/o_gaps_RedCap}} \times K_p \times K_{\text{layer1_measurement}}) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M_{\text{pss/sss_sync_w/o_gaps_RedCap}} \times K_p \times K_{\text{layer1_measurement}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra_RedCap}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.2B.5.1-3: Time period for PSS/SSS detection, (Frequency range FR1) for 1Rx RedCap UE

DRX cycle	$T_{PSS/SSS_sync_intra_RedCap}$
No DRX	$\max(600\text{ms}, \text{ceil}(7 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{intra_RedCap}$
DRX cycle $\leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(1.5 \times 7 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{intra_RedCap}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(7 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.2B.5.1-4: Time period for time index detection (FR1) for 2Rx RedCap UE

DRX cycle	$T_{SSB_time_index_intra_RedCap}$
No DRX	$\max(120\text{ms}, \text{ceil}(3 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{intra_RedCap}$
DRX cycle $\leq 320\text{ms}$	$\max(120\text{ms}, \text{ceil}(1.5 \times 3 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{intra_RedCap}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(3 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.2B.5.1-5: Time period for time index detection (FR1) for 1Rx RedCap UE

DRX cycle	$T_{SSB_time_index_intra_RedCap}$
No DRX	$\max(160\text{ms}, \text{ceil}(6 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{intra_RedCap}$
DRX cycle $\leq 320\text{ms}$	$\max(160\text{ms}, \text{ceil}(1.5 \times 6 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{intra_RedCap}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(6 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

9.2B.5.2 Measurement period

The measurement period for intra-frequency measurements without gaps is as shown in table 9.2B.5.2-1, 9.2B.5.2-2, 9.2B.5.2-3.

If the higher layer signaling in TS38.331 [2] signalling of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, requirements are not specified for $T_{SSB_measurement_period_intra_RedCap}$.

For FR2, a longer measurement period is allowed, if aperiodic CSI-RS resource is measured for L1-RSRP measurement on any FR2 serving frequency in the same band, and the CSI-RS resource is outside measurement gap and overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols. If *SSB-ToMeasure* or *SS-RSSI-Measurement* is configured, the SSB symbols are indicated by the union set of *SSB-ToMeasure* from all the configured measurement objects on the same band which can be merged and the RSSI symbols are indicated by *SS-RSSI-Measurement*.

Table 9.2B.5.2-1: Measurement period for intra-frequency measurements without gaps (FR1) for 2Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_intra_RedCap}$
No DRX	$\max(200\text{ms}, \text{ceil}(5 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{intra_RedCap}$
DRX cycle $\leq 320\text{ms}$	$\max(200\text{ms}, \text{ceil}(1.5 \times 5 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{intra_RedCap}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(5 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{intra_RedCap}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.2B.5.2-2: Measurement period for intra-frequency measurements without gaps (FR2) for 2Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_intra_RedCap}$
No DRX	$\max(400\text{ms}, \text{ceil}(M_{\text{meas_period_w/o_gaps_RedCap}} \times K_p \times K_{\text{layer1_measurement}}) \times \text{SMTc_period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $\leq 320\text{ms}$	$\max(400\text{ms}, \text{ceil}(1.5 \times M_{\text{meas_period_w/o_gaps_RedCap}} \times K_p \times K_{\text{layer1_measurement}}) \times \max(\text{SMTc_period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M_{\text{meas_period_w/o_gaps_RedCap}} \times K_p \times K_{\text{layer1_measurement}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra_RedCap}}$
NOTE 1: If different SMTc periodicities are configured for different cells, the SMTc period in the requirement is the one used by the cell being identified	

Table 9.2B.5.2-3: Measurement period for intra-frequency measurements without gaps (FR1) for 1Rx RedCap UE

DRX cycle	$T_{SSB_measurement_period_intra_RedCap}$
No DRX	$\max([200]\text{ms}, \text{ceil}([5] \times K_p) \times \text{SMTc_period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $\leq 320\text{ms}$	$\max([200]\text{ms}, \text{ceil}(1.5 \times [5] \times K_p) \times \max(\text{SMTc_period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $> 320\text{ms}$	$\text{ceil}([5] \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra_RedCap}}$
NOTE 1: If different SMTc periodicities are configured for different cells, the SMTc period in the requirement is the one used by the cell being identified	

9.2B.5.3 Scheduling availability of UE during intra-frequency measurements

UE shall be capable of measuring without measurement gaps when the SSB is completely contained in the active bandwidth part of the UE. When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols indicated by the union set of SSB-ToMeasure from all the configured measurement objects on the same serving carrier which can be merged [2], if it is configured; otherwise, all L SSB symbols within the SMTc window duration defined in clause 4.1 of TS 38.213 [3] are included.

9.2B.5.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTc window duration. If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the SMTc periodicity follows *smtc2*; Otherwise SMTc periodicity follows *smtc1*.

When the UE performs intra-frequency measurements in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTc window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTc periodicity follows *smtc2*; Otherwise the SMTc periodicity follows *smtc1*.

9.2B.5.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement

- If *deriveSSB_IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.
- If *deriveSSB_IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.
- If the following conditions are met:
 - The UE has been notified about system information update through paging,
 - The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots
- The UE shall receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and/or the corresponding PDSCH, on SSB symbols to be measured.

9.2B.5.3.3 Scheduling availability of UE performing measurements on FR2

The following scheduling restriction applies due to SS-RSRP or SS-SINR measurement on an FR2 intra-frequency cell

The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration (The signaling *deriveSSB_IndexFromCell* is always enabled for FR2). If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

The following scheduling restriction applies to SS-RSRQ measurement on an FR2 intra-frequency cell

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration (The signaling *deriveSSB_IndexFromCell* is always enabled for FR2). If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

If following conditions are met:

- The UE has been notified about system information update through paging,
- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots.

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, the UE shall receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, the UE shall receive PDSCH that corresponds to the PDCCH that the UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured.

9.2B.5.3.4 Scheduling availability of UE performing measurements in HD-FDD bands on FR1

When the UE performs intra-frequency measurements in a HD-FDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the SMTC periodicity follows *smtc2*; Otherwise SMTC periodicity follows *smtc1*.

When the UE performs intra-frequency measurements in a HD-FDD band, the following restrictions apply due to SS-RSRQ measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

9.2B.6 Intra-frequency measurements with measurement gaps

9.2B.6.1 Intra-frequency cell identification

The UE shall be able to identify a new detectable intra frequency cell within $T_{\text{identify_intra_without_index_RedCap}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{\text{identify_intra_with_index_RedCap}}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{\text{identify_intra_without_index_RedCap}}$. It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.

$$T_{\text{identify_intra_without_index_RedCap}} = T_{\text{PSS/SSS_sync_intra_RedCap}} + T_{\text{SSB_measurement_period_intra_RedCap}} \text{ ms}$$

$$T_{\text{identify_intra_with_index_RedCap}} = T_{\text{PSS/SSS_sync_intra_RedCap}} + T_{\text{SSB_measurement_period_intra_RedCap}} + T_{\text{SSB_time_index_intra_RedCap}} \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_intra_RedCap}}$: it is the time period used in PSS/SSS detection given in table 9.2B.6.1-1 or 9.2B.6.1-2 or 9.2B.6.1-3.

$T_{\text{SSB_time_index_intra_RedCap}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2B.6.1-4 or 9.2B.6.1-5.

$T_{\text{SSB_measurement_period_intra_RedCap}}$: equal to a measurement period of SSB based measurement given in table 9.2B.6.2-1 or 9.2B.6.2-2 or 9.2B.6.2-3.

$\text{CSSF}_{\text{intra_RedCap}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{within_gap_RedCap},i}$ in clause 9.1A.5.2 for measurement conducted within measurement gaps.

For 2Rx RedCap:

$M_{\text{pss/sss_sync_with_gaps_RedCap}}$: For a UE supporting FR2 power class 1 or 5, $M_{\text{pss/sss_sync_with_gaps_RedCap}} = 40$. For a UE supporting FR2 power class 2, 3, 4 or 7, $M_{\text{pss/sss_sync_with_gaps_RedCap}} = 24$.

$M_{\text{meas_period_with_gaps_RedCap}}$: For a UE supporting power class 1 or 5, $M_{\text{meas_period_with_gaps_RedCap}} = 40$. For a UE supporting power class 2, 3, 4, or 7, $M_{\text{meas_period_with_gaps_RedCap}} = 24$.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, requirements are not specified for $T_{\text{identify_intra_without_index_RedCap}}$ or $T_{\text{identify_intra_with_index_RedCap}}$.

Table 9.2B.6.1-1: Time period for PSS/SSS detection (FR1) for 2Rx RedCap UE

DRX cycle	$T_{\text{PSS/SSS_sync_intra_RedCap}}$
No DRX	$\max(600\text{ms}, 5 \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra_RedCap}}$

DRX cycle $\leq$ 320ms	$\max(600\text{ms}, \text{ceil}(1.5 \times 5) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $>$ 320ms	$5 \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra_RedCap}}$

Table 9.2B.6.1-2: Time period for PSS/SSS detection (FR2) for 2Rx RedCap UE

DRX cycle	$T_{\text{PSS/SSS_sync_intra_RedCap}}$
No DRX	$\max(600\text{ms}, M_{\text{pss/sss_sync_with_gaps_RedCap}} \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $\leq$ 320ms	$\max(600\text{ms}, \text{ceil}(1.5 \times M_{\text{pss/sss_sync_with_gaps_RedCap}}) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra_RedCap_RedCap}}$
DRX cycle $>$ 320ms	$M_{\text{pss/sss_sync_with_gaps_RedCap}} \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra_RedCap}}$

Table 9.2B.6.1-3: Time period for PSS/SSS detection (FR1) for 1Rx RedCap UE

DRX cycle	$T_{\text{PSS/SSS_sync_intra_RedCap}}$
No DRX	$\max(600 \text{ ms}, 7 \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $\leq$ 320ms	$\max(600 \text{ ms}, \text{ceil}(1.5 \times 7) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $>$ 320ms	$7 \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra_RedCap}}$

Table 9.2B.6.1-4: Time period for time index detection (Frequency range FR1) for 2Rx RedCap UE

DRX cycle	$T_{\text{SSB_time_index_intra_RedCap}}$
No DRX	$\max(120\text{ms}, 3 \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $\leq$ 320ms	$\max(120\text{ms}, \text{ceil}(1.5 \times 3) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $>$ 320ms	$3 \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra_RedCap}}$

Table 9.2B.6.1-5: Time period for time index detection (Frequency range FR1) for 1Rx RedCap UE

DRX cycle	$T_{\text{SSB_time_index_intra_RedCap}}$
No DRX	$\max(160\text{ms}, 6 \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $\leq$ 320ms	$\max(160\text{ms}, \text{ceil}(1.5 \times 6) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $>$ 320ms	$[6] \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra_RedCap}}$

9.2B.6.2 Intra-frequency Measurement Period

The measurement period for FR1 intra-frequency measurements with gaps is as shown in table 9.2B.6.2-1 and in table 9.2B.6.2-3 for 1 Rx RedCap.

The measurement period for FR2 intra-frequency measurements with gaps is as shown in table 9.2B.6.2-2.

For either an FR1 or FR2 serving cell, longer measurement period would be expected during the period $T_{\text{identify_CGI_RedCap}}$ when the UE is requested to decode an NR CGI.

Table 9.2B.6.2-1: Measurement period for intra-frequency measurements with gaps (FR1) for 2Rx RedCap UE

DRX cycle	$T_{\text{SSB_measurement_period_intra_RedCap}}$
No DRX	$\max(200\text{ms}, 5 \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle $\leq$ 320ms	$\max(200\text{ms}, \text{ceil}(1.5 \times 5) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra_RedCap}}$

DRX cycle>320ms	$5 \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra_RedCap}}$
-----------------	--

Table 9.2B.6.2-2: Measurement period for intra-frequency measurements with gaps (FR2) for 2Rx RedCap UE

DRX cycle	$T_{\text{SSB_measurement_period_intra_RedCap}}$
No DRX	$\max(400\text{ms}, M_{\text{meas_period with_gaps_RedCap}} \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle ≤ 320ms	$\max(400\text{ms}, \text{ceil}(1.5 \times M_{\text{meas_period with_gaps_RedCap}}) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra_RedCap}}$ ^{Note 1}
DRX cycle > 320ms	$M_{\text{meas_period with_gaps_RedCap}} \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra_RedCap}}$

Table 9.2B.6.2-3: Measurement period for intra-frequency measurements with gaps (FR1) for 1Rx RedCap UE

DRX cycle	$T_{\text{SSB_measurement_period_intra_RedCap}}$
No DRX	$\max([200] \text{ ms}, [5] \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle ≤ 320ms	$\max([200] \text{ ms}, \text{ceil}(1.5 \times [5]) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra_RedCap}}$
DRX cycle > 320ms	$[5] \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra_RedCap}}$

9.2C NR intra-frequency measurements for SAN

9.2C.1 Introduction

The requirements in clause 9.2C apply for intra-frequency measurements on an SAN carrier frequency. The requirements apply provided that valid parameters of ephemeris information, epoch time of the ephemeris, common TA, validity timer information, downlink polarization information for target NR SAN cell are sent to UE.

A measurement is defined as a SSB based intra-frequency measurement provided the centre frequency of the SSB of the serving cell indicated for measurement and the centre frequency of the SSB of the neighbour cell are the same, and the subcarrier spacing of the two SSBs are also the same.

The UE shall be able to identify new intra-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified intra-frequency cells if carrier frequency information is provided by PCell, even if no explicit neighbour list with physical layer cell identities is provided.

The UE can perform intra-frequency SSB based measurements without measurement gaps if

- the UE indicates ‘no-gap’ via *intraFreq-needForGap* for intra-frequency measurement, or
- the SSB is completely contained in the active BWP of the UE, or
- the active downlink BWP is initial BWP[3].

For intra-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in clause 9.2C.5.3.

SSB based measurements are configured along with one or more measurement timing configuration(s) (SMTC(s)) which provides periodicity, duration and offset information on a window of up to 5ms where the measurements are to be performed. For intra-frequency connected mode measurements,

- when *SSB-MTC4List-r17* is not configured, up to two measurement window periodicities may be configured with *SSB-MTC* and *SSB-MTC2*

- when *SSB-MTC4List-r17* is configured, multiple measurement window offsets may be configured with *SSB-MTC* and *SSB-MTC4List-r17*, and the requirements in 9.2C apply provided that the total number of measurement window offsets does not exceed the UE capability *parallelSMTC-r17*

When measurement gaps are needed, the UE is not expected to detect SSB which start earlier than the gap starting time + switching time, nor detect SSB which end later than the gap end – switching time. Switching time is 0.5ms for frequency range FR1.

The intra-frequency measurement requirements in clause 9.2C.5 applies for the following scenarios:

- SSB based intra-frequency measurements with no measurement gap,
 - for a UE supporting concurrent gaps and when concurrent gaps are configured:
 - When none of the SMTC occasions of this intra-frequency measurement object are overlapped by the union of concurrent measurement gaps.
 - When part of the SMTC occasions of this intra-frequency measurement object are overlapped by the union of concurrent measurement gaps.
 - otherwise, for a UE not supporting concurrent gaps or if concurrent gaps are not configured:
 - When none of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap.
 - When part of the SMTC occasions of this intra-frequency measurement object are overlapped by the measurement gap.

The intra-frequency measurement requirements in clause 9.2C.6 applies for the following scenarios:

- SSB based intra-frequency measurements with measurement gap,
- SSB based intra-frequency measurements with no measurement gap,
 - for a UE supporting concurrent gaps and when concurrent gaps are configured:
 - when all of the SMTC occasions of this intra-frequency measurement object are overlapped with the associated measurement gap in the concurrent measurement gaps, or
 - when part of the SMTC occasions of this intra-frequency measurement object are overlapped with the associated measurement gap and all the SMTC occasions of this intra-frequency measurement object are overlapped with the union of concurrent measurement gaps.
 - otherwise, for a UE not supporting concurrent gaps or if concurrent gaps are not configured:
 - when all of the SMTC occasions of this intra-frequency measurement object are overlapped with the measurement gap.

9.2C.2 Requirements applicability

The requirements in clause 9.2C apply, provided:

- The cell being identified or measured is detectable.
- Valid information for the satellite serving the target cell has been provided

An intra-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clauses 10.1.2C for FR1, for a corresponding Band,
- SS-RSRQ related side conditions given in clauses 10.1.7C for FR1, for a corresponding Band,
- SS-SINR related side conditions given in clauses 10.1.12C for FR1, for a corresponding Band,
- SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.17 for a corresponding Band.

9.2C.3 Number of cells and number of SSB

9.2C.3.1 Requirements for FR1

For each intra-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 8 identified cells, and
- 8 SSBs with different SSB index and/or PCI on the intra-frequency layer, where the number of SSBs in the serving cell (except for the SCell) is not smaller than the number of configured RLM-RS SSB resources.
- 4 SSBs with different SSB index and/or PCI from neighbour cells in GEO deployment.
- In NGSO deployments: cells from 2 satellites including the satellite serving the PCell if UE does not support the capability *maxNumber-NGSO-SatellitesPerCarrier-r17*; or cells from 3 or 4 satellites including the satellite serving the PCell, depending on the value indicated in *maxNumber-NGSO-SatellitesPerCarrier-r17*.

9.2C.4 Measurement Reporting Requirements

9.2C.4.1 Periodic Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in periodic measurement reports shall meet the requirements in clauses 10.1.2C.1 (RSRP for FR1), 10.1.7C.1 (RSRQ for FR1) and 10.1.12C.1 (RS-SINR for FR1).

9.2C.4.2 Event-triggered Periodic Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.1.2C.1 (RSRP for FR1), 10.1.7C.1 (RSRQ for FR1) and 10.1.12C.1 (RS-SINR for FR1)..

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.2C.4.3.

9.2C.4.3 Event Triggered Reporting

Reported RSRP, RSRQ, and RS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.2C.1 (RSRP for FR1), 10.1.7C.1 (RSRQ for FR1) and 10.1.12C.1 (RS-SINR for FR1)..

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times T_{\text{TTI}_{\text{DCCH}}}$. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{\text{identify intra with index}}$ or $T_{\text{identify intra without index}}$ defined in clause 9.2C.5.1 or clause 9.2C.6.2. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{\text{identify intra without index}}$ or $T_{\text{identify intra with index}}$ as defined in clause 9.2C.5.1 or clause 9.2C.6.2. When L3 filtering is used, an additional delay can be expected.

9.2C.5 Intra frequency measurements without measurement gaps

9.2C.5.1 Intra frequency cell identification

The UE shall be able to identify a new detectable intra-frequency cell within $T_{\text{identify_intra_without_index}}$ if the UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{\text{identify_intra_with_index}}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{\text{identify_intra_without_index}}$.

$$T_{\text{identify_intra_without_index}} = (T_{\text{PSS/SSS_sync_intra}} + T_{\text{SSB_measurement_period_intra}}) \text{ ms}$$

$$T_{\text{identify_intra_with_index}} = (T_{\text{PSS/SSS_sync_intra}} + T_{\text{SSB_measurement_period_intra}} + T_{\text{SSB_time_index_intra}}) \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_intra}}$: it is the time period used in PSS/SSS detection given in table 9.2C.5.1-1

$T_{\text{SSB_time_index_intra}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2C.5.1-2

$T_{\text{SSB_measurement_period_intra}}$: equal to a measurement period of SSB based measurement given in table 9.2C.5.2-1

$K_{\text{multi_SMTC}}$ is the scaling factor for measurement of multiple SMTCs or multiple satellites, and

if SMTCs do not overlap with each other,

- $K_{\text{multi_SMTC}} = 1$, if GEO satellites are measured on the carrier;
- $K_{\text{multi_SMTC}} = \left\lceil \frac{N_{\text{LEO},i}}{N_{\text{LEO},\text{simul}}} \right\rceil$, if LEO satellites are measured on the carrier;

if SMTCs partially overlap with each other,

- $K_{\text{multi_SMTC}} = N_{\text{SMTC},\text{overlap}}$, if only GEO satellites are measured on the carrier;
- $K_{\text{multi_SMTC}} = \sum_{i=1}^{N_{\text{SMTC},\text{overlap}}} \left\lceil \frac{N_{\text{LEO},i}}{N_{\text{LEO},\text{simul}}} \right\rceil$, if only LEO satellites are measured on the carrier;

where

- $N_{\text{LEO},i}$ is the number of LEO satellites to be measured within i-th SMTC,
- $N_{\text{LEO},\text{simul}}$ is the number of LEO satellites that UE can measure in parallel within an SMTC,
- $N_{\text{SMTC},\text{overlap}}$ is the number of SMTCs that partially overlap with each other.

$\text{CSSF}_{\text{intra}}$: it is a carrier specific scaling factor and is determined

according to $\text{CSSF}_{\text{outside_gap},i}$ in clause 9.1.5.1.

if the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc2*; Otherwise the assumed periodicity of intra-frequency SMTC occasions corresponds to the value of higher layer parameter *smtc1*.

K_p is the scaling factor for an SSB frequency layer to be measured without measurement gaps. $K_p = N_{\text{total_SAN}} / N_{\text{available_SAN}}$, where $N_{\text{available_SAN}}$ and $N_{\text{total_SAN}}$ are calculated as follows:

- For a window W of duration $\max(\text{SMTC period}, \text{MGRP_max})$, where

- If UE supports *parallelMeasurementGap-r17* and is configured with concurrent measurement gaps, MGRP max is the maximum MGRP across all configured per-UE measurement gap. Otherwise, MGRP max is the MGRP of configured measurement gap.
- Starting from the beginning of any SMTC occasion:
 - $N_{\text{total_SAN}}$ is the total number of SMTC occasions within the window, including those overlapped and non-overlapped with measurement gap occasions within the window, and
 - $N_{\text{available_SAN}}$ is the number of SMTC occasions within the window W that don't collide with any non-dropped MG occasion within or outside the window W , after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1C.8.3. The collision rule between SMTC occasion and measurement gap occasion is defined in section 9.1C.9.1

$K_p = [1]$ when $N_{\text{available_SAN}} = 0$ and measurement gap sharing in clause 9.1.2.1a shall apply.

$K_p = 1$ when intra-frequency SMTC is fully non overlapping with measurement gaps.

For calculation of K_p , if the high layer signalling (TS 38.331 [2]) of *smtc2* is configured, for cells indicated in the *pci-List* parameter in *smtc2*, the SMTC periodicity corresponds to the value of higher layer parameter *smtc2*; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter *smtc1*.

$K_{\text{layer1_measurement}}$: it is scaling factor for sharing between L3 and L1 measurement, and $K_{\text{layer1_measurement}} = 1$, if GEO satellites are measured on the carrier, or if LEO satellites are measured on the carrier and UE supports *parallelMeasurementWithoutRestriction*, otherwise

$K_{\text{layer1_measurement}} = 1$,

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting outside measurement gap are not fully overlapped by intra-frequency SMTC occasions, or
- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting outside measurement gap and fully-overlapped by intra-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasurement* and *SS-RSSI-Measurement* are configured, and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{\text{layer1_measurement}} = 1.5$, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

If the higher layer signaling in TS38.331 [2] signalling of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, requirements are not specified for $T_{\text{identify_intra_without_index}}$ or $T_{\text{identify_intra_with_index}}$

Table 9.2C.5.1-1: Time period for PSS/SSS detection, (Frequency range FR1)

DRX cycle	$T_{\text{PSS/SSS_sync_intra}}$
No DRX	$\max(600\text{ms}, \text{ceil}(5 \times K_p \times K_{\text{layer1_measurement}}) \times K_{\text{multi_SMTC}} \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(1.5 \times 5 \times K_p \times K_{\text{layer1_measurement}}) \times K_{\text{multi_SMTC}} \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(5 \times K_p \times K_{\text{layer1_measurement}}) \times K_{\text{multi_SMTC}} \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.2C.5.1-2: Time period for time index detection (FR1)

DRX cycle	$T_{\text{SSB_time_index_intra}}$
-----------	--------------------------------------

No DRX	$\max(120\text{ms}, \text{ceil}(3 \times K_p \times K_{\text{layer1_measurement}}) \times K_{\text{multi_SMTC}} \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(120\text{ms}, \text{ceil}(1.5 \times 3 \times K_p \times K_{\text{layer1_measurement}}) \times K_{\text{multi_SMTC}} \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(3 \times K_p \times K_{\text{layer1_measurement}}) \times K_{\text{multi_SMTC}} \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

The requirements in clause 9.2C.5.1 and 9.2C.5.2 are not applicable when the overall overhead ratio due to scheduling restriction caused by all configured SMTCs (i.e. scheduling restriction overhead of all SMTCs in one SMTC periodicity), is larger than 75%.

9.2C.5.2 Measurement period

The measurement period for intra-frequency measurements without gaps is as shown in table 9.2C.5.2-1.

If the higher layer signaling in TS38.331 [2] signalling of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, requirements are not specified for

$T_{\text{SSB_measurement_period_intra}}$

Table 9.2C.5.2-1: Measurement period for intra-frequency measurements without gaps (FR1)

DRX cycle	$T_{\text{SSB_measurement_period_intra}}$
No DRX	$\max(200\text{ms}, \text{ceil}(5 \times K_p \times K_{\text{layer1_measurement}}) \times K_{\text{multi_SMTC}} \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(200\text{ms}, \text{ceil}(1.5 \times 5 \times K_p \times K_{\text{layer1_measurement}}) \times K_{\text{multi_SMTC}} \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(5 \times K_p \times K_{\text{layer1_measurement}}) \times K_{\text{multi_SMTC}} \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

9.2C.5.3 Scheduling availability of UE during intra-frequency measurements

When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols indicated by the union set of SSB-ToMeasure from all the configured measurement objects on the same serving carrier which can be merged [2], if it is configured; otherwise, all L SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included. For UL, the scheduling restriction applies to UL symbols that fully or partially overlap with the restricted symbols as defined below.

9.2C.5.3.1 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement

- If *deriveSSB-IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer signalling of *smtc2* is configured (in TS 38.331 [2]), the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.
- If *deriveSSB-IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

The UE shall be able to receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and/or the corresponding PDSCH, on SSB symbols to be measured., if the following conditions are met:

- The UE has been notified about system information update through paging,
- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots

9.2C.5.3.2 Scheduling availability of UE performing measurements on a neighbor cell served by a different satellite in LEO

For UE which do not support the capability *parallelMeasurementWithoutRestrictionTBD* the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement on a neighbor cell served by a different satellite in LEO.

- If *deriveSSB-IndexFromCell* is enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration. If the high layer signalling of *smtc2* is configured(in TS 38.331 [2]), the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.
- If *deriveSSB-IndexFromCell* is not enabled the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration. If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.
- If the following conditions are met:
 - The UE has been notified about system information update through paging,
 - The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots
- The UE shall receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and/or the corresponding PDSCH, on SSB symbols to be measured.

9.2C.6 Intra-frequency measurements with measurement gaps

9.2C.6.1 Intra-frequency cell identification

The UE shall be able to identify a new detectable intra frequency cell within $T_{\text{identify_intra_without_index}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured), or the UE has been indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise UE shall be able to identify a new detectable intra frequency cell within $T_{\text{identify_intra_with_index}}$. The UE shall be able to identify a new detectable intra frequency SS block of an already detected cell within $T_{\text{identify_intra_without_index}}$.

$$T_{\text{identify_intra_without_index}} = T_{\text{PSS/SSS_sync_intra}} + T_{\text{SSB_measurement_period_intra}} \text{ ms}$$

$$T_{\text{identify_intra_with_index}} = T_{\text{PSS/SSS_sync_intra}} + T_{\text{SSB_measurement_period_intra}} + T_{\text{SSB_time_index_intra}} \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_intra}}$: it is the time period used in PSS/SSS detection given in table 9.2C.6.2-1.

$T_{\text{SSB_time_index_intra}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.2C.6.2-2.

$T_{\text{SSB_measurement_period_intra}}$: equal to a measurement period of SSB based measurement given in table 9.2C.6.3-1.

K_{gap} is the scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. $K_{\text{gap}} = 1$ when the UE is not configured with concurrent measurement gaps. When the UE is configured with concurrent measurement gaps and the two measurement gaps are fully overlapping with $\text{MGRP}=160\text{ms}$, $K_{\text{gap}} = 2$. Otherwise, $K_{\text{gap}} = N_{\text{total}} / N_{\text{available}}$, where $N_{\text{available}}$ and N_{total} are calculated as follows:

For a window W of duration $\max(\text{SMTC period}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gap, and starting from the beginning of any SMTC occasion:

- N_{total} is the total number of SMTC occasions that are covered by instances of the associated measurement gap within the window W , including those overlapped with other measurement gap occasions within the window, and
- $N_{\text{available}}$ is the number of SMTC occasions that are covered by instances of the non-dropped associated measurement gap within the window W after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3.

K_{gap} is only applicable for UE supporting *parallelMeasurementGap-r17*. When concurrent measurement gaps are configured, requirements in this clause do not apply if $N_{\text{available}} = 0$, or if one SMTC overlaps more than one MGs associated to the frequency layer.

$\text{CSSF}_{\text{intra}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{within_gap},i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

$K_{\text{multi_SMTC}}$ is the scaling factor for measurement of multiple SMTCs or multiple satellites, and

if SMTCs within a measurement gap do not overlap with each other,

- $K_{\text{multi_SMTC}} = 1$, if GEO satellites are measured on the carrier;
- $K_{\text{multi_SMTC}} = \left\lceil \frac{N_{\text{LEO},i}}{N_{\text{LEO},\text{simul}}} \right\rceil$, if LEO satellites are measured on the carrier;

if SMTCs within a measurement gap partially overlap with each other,

- $K_{\text{multi_SMTC}} = N_{\text{SMTC,overlap}}$, if only GEO satellites are measured on the carrier;
- $K_{\text{multi_SMTC}} = \sum_{i=1}^{N_{\text{SMTC,overlap}}} \left\lceil \frac{N_{\text{LEO},i}}{N_{\text{LEO},\text{simul}}} \right\rceil$, if only LEO satellites are measured on the carrier;

where

- $N_{\text{LEO},i}$ is the number of LEO satellites to be measured within i -th SMTC,
- $N_{\text{LEO},\text{simul}}$ is the number of LEO satellites that UE can measure in parallel within an SMTC,
- $N_{\text{SMTC,overlap}}$ is the number of SMTCs that partially overlap with each other.

If the higher layer signaling in TS 38.331 [2] of *smtc2* is present and *smtc1* is fully overlapping with measurement gaps and *smtc2* is partially overlapping with measurement gaps, requirements are not specified for $T_{\text{identify_intra_without_index}}$ OR $T_{\text{identify_intra_with_index}}$.

Table 9.2C.6.2-1: Time period for PSS/SSS detection (FR1)

DRX cycle	$T_{\text{PSS/SSS_sync_intra}}$
No DRX	$\max(600\text{ms}, 5 \times K_{\text{gap}} \times K_{\text{multi_SMTC}} \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(1.5 \times 5) \times K_{\text{gap}} \times K_{\text{multi_SMTC}} \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$5 \times K_{\text{gap}} \times K_{\text{multi_SMTC}} \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$

Table 9.2C.6.2-2: Time period for time index detection (Frequency range FR1)

DRX cycle	$T_{\text{SSB_time_index_intra}}$
-----------	--------------------------------------

No DRX	$\max(120\text{ms}, 3 \times K_{\text{gap}} \times K_{\text{multi_SMTc}} \times \max(\text{MGRP}, \text{SMTc period})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(120\text{ms}, \text{ceil}(1.5 \times 3) \times K_{\text{gap}} \times K_{\text{multi_SMTc}} \times \max(\text{MGRP}, \text{SMTc period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$3 \times K_{\text{gap}} \times K_{\text{multi_SMTc}} \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$

9.2C.6.3 Intrafrequency Measurement Period

The measurement period for FR1 intrafrequency measurements with gaps is as shown in table 9.2C.6.3-1.

Table 9.2C.6.3-1: Measurement period for intra-frequency measurements with gaps (FR1)

DRX cycle	$T_{\text{SSB_measurement_period_intra}}$
No DRX	$\max(200\text{ms}, 5 \times K_{\text{gap}} \times K_{\text{multi_SMTc}} \times \max(\text{MGRP}, \text{SMTc period})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(200\text{ms}, \text{ceil}(1.5 \times 5) \times K_{\text{multi_SMTc}} \times K_{\text{gap}} \times \max(\text{MGRP}, \text{SMTc period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$5 \times K_{\text{gap}} \times K_{\text{multi_SMTc}} \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$

9.3 NR inter-frequency measurements

9.3.1 Introduction

A measurement is defined as an SSB based inter-frequency measurement provided it is not defined as an intra-frequency measurement according to clause 9.2.

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified inter-frequency cells if carrier frequency information is provided by PCell or PSCell, even if no explicit neighbour list with physical layer cell identities is provided.

A measurement is defined as an inter-frequency SSB based measurements without measurement gaps (either legacy measurement gap or NCSG) in active BWP, for UE capable of *interFrequencyMeas-NoGap* provided that

- the UE supports *interFrequencyMeas-NoGap-r16* [15], and
- the SSB is completely contained in the active BWP of the UE.
- For inter-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in clause 9.3.9.3.
- Note: Non-CA capable UE is not expected to indicate support of *interFrequencyMeas-NoGap-r16* [15].

Besides the conditions listed above,

for UE supporting *nr-NeedForGapNCSG-reporting-r17* and indicating *NeedForGapNCSG-InfoNR* for inter-frequency measurement,

- An inter-frequency SSB measurement is defined as measurement without gap if
 - the UE indicates ‘nogap-noncsg’ via *NeedForGapNCSG-InfoNR* for the inter-frequency measurement, and
 - the SSB is not completely contained in the active BWP of the UE
 - During inter-frequency SSB based measurements without MG and NCSG, UE may cause scheduling restriction as specified in clause 9.3.9.4.
- An inter-frequency SSB measurement is defined as measurement with NCSG if
 - the UE indicates ‘ncsg’ via *NeedForGapNCSG-InfoNR* for the inter-frequency measurement, and

- the SSB is not completely contained in the active BWP of the UE
- During inter-frequency SSB based measurements with NCSG, UE may cause scheduling restriction as specified in clause 9.3.10.3.
- An inter-frequency SSB measurement is defined as measurement with gap if
 - the UE indicates 'gap' via *NeedForGapNCSG-InfoNR* for the inter-frequency measurement, and
 - the SSB is not completely contained in the active BWP of the UE

SSB based measurements are configured along with a measurement timing configuration (SMTC) per carrier, which provides periodicity, duration and offset information on a window of up to 5ms where the measurements on the configured inter-frequency carrier are to be performed. For inter-frequency connected mode measurements, one measurement window periodicity may be configured per inter-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB and measure RSSI of RSRQ on an inter-frequency measurement object which start earlier than the gap starting time + switching time, nor detect SSB and measure RSSI of RSRQ which ends later than the gap end – switching time. When the inter-frequency cells are in FR2 and the per-FR gap is configured to the UE in EN-DC, SA NR, NE-DC and NR-DC, or the serving cells are in FR2, the inter-frequency cells are in FR2 and the per-UE gap is configured to the UE in SA NR and NR-DC, the switching time is 0.25ms. Otherwise the switching time is 0.5ms.

The requirements in this clause shall also apply, when the UE is configured to perform SRS carrier based switching and using measurement gaps.

Longer measurement period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

The measurement reporting delay can be longer for the measurement reporting requirements in this clause when IDC autonomous denial is configured.

The inter-frequency measurement requirements in clause 9.3.4 and clause 9.3.5 applies for the following scenarios:

- SSB-based inter-frequency measurement object with measurement gap.
- SSB-based inter-frequency measurement object without measurement gap for UE capable of *interFrequencyMeas-NoGap*, when
 - all of the SMTC occasions of this inter-frequency measurement object are overlapped with the measurement gap or associated measurement gap in concurrent measurement gaps, or
 - part of the SMTC occasions of this inter-frequency measurement object are overlapped with the associated measurement gap and all the SMTC occasions of this inter-frequency measurement object are overlapped with the union of concurrent measurement gaps, or
 - part of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap or associated measurement gap in concurrent measurement gaps and the flag *interFrequencyConfig-NoGap-r16* is not configured by the Network.

The inter-frequency measurement requirements in clause 9.3.9 applies for the following scenarios:

- SSB-based inter-frequency measurement with no measurement gap, when none of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap or the union of concurrent measurement gaps, if UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network.
- SSB-based inter-frequency measurement with no measurement gap, when part of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap or the union of concurrent measurement gaps, if UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network.

The inter-frequency measurement requirements in clause 9.3.10 applies for the following scenarios:

- SSB-based inter-frequency measurement object without measurement gap, when all of the SMTC occasions of this inter-frequency measurement object are overlapped by the NCSG;
- SSB-based inter-frequency measurement object with NCSG.

9.3.2 Requirements applicability

The requirements in clause 9.3 apply, provided:

- The cell being identified or measured is detectable.

An inter-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clauses 10.1.4 and 10.1.5 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in clauses 10.1.9 and 10.1.10 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in clauses 10.1.14 and 10.1.15 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.3 for a corresponding Band.

9.3.2.1 Void

9.3.2.2 Void

9.3.3 Number of cells and number of SSB

9.3.3.1 Requirements for FR1

For each inter-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 4 identified cells, and
- 7 SSBs with different SSB index and/or PCI on the inter-frequency layer.

9.3.3.2 Requirements for FR2

For each inter-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 4 identified cells, and
- 10 SSBs with different SSB index and/or PCI on the inter-frequency layer, and
- 1 SSB per identified cell.

9.3.4 Inter-frequency measurement with measurement gaps

When measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_without_index}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured) or *deriveSSB-IndexFromCellInter-r17* is configured for the FR1 and FR2-1 target frequency layers and UE supporting *deriveSSB-IndexFromCellInterNon-NCSG-r17*. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_with_index}}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{\text{identify_inter_without_index}}$.

$$T_{\text{identify_inter_without_index}} = (T_{\text{PSS/SSS_sync_inter}} + T_{\text{SSB_measurement_period_inter}}) \text{ ms}$$

$$T_{\text{identify_inter_with_index}} = (T_{\text{PSS/SSS_sync_inter}} + T_{\text{SSB_measurement_period_inter}} + T_{\text{SSB_time_index_inter}}) \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_inter}}$: it is the time period used in PSS/SSS detection given in table 9.3.4-1, table 9.3.4-2, and table 9.3.4-5 when *highSpeedMeasInterFreq-r17* is configured and UE supports *measurementEnhancementInterFreq-r17*. When the SCG is deactivated, table 9.3.4-7 applies for an inter-frequency carrier configured by SCG and not configured by MCG and table 9.3.4-2 applies for an inter-frequency carrier configured by both SCG and MCG. Regardless of whether the SCG is activated or deactivated, table 9.3.4-2 applies for an inter-frequency carrier configured only by MCG.

$T_{\text{SSB_time_index_inter}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3.4-3 and table 9.3.4-6 when *highSpeedMeasInterFreq* is configured and UE supports *measurementEnhancementInterFreq-r17*. When the SCG is deactivated, table 9.3.4-8 applies for an inter-frequency carrier configured by SCG and not configured by MCG and table 9.3.4-4 applies for an inter-frequency carrier configured by both SCG and MCG. Regardless of whether the SCG is activated or deactivated, table 9.3.4-4 applies for an inter-frequency carrier configured only by MCG.

$T_{\text{SSB_measurement_period_inter}}$: equal to a measurement period of SSB based measurement given in table 9.3.5-1, table 9.3.5-2 and table 9.3.5-3 when *highSpeedMeasInterFreq* is configured and UE supports *measurementEnhancementInterFreq-r17*. When the SCG is deactivated, table 9.3.5-4 applies for an inter-frequency carrier configured by SCG and not configured by MCG and table 9.3.5-2 applies for an inter-frequency carrier configured by both SCG and MCG. Regardless of whether the SCG is activated or deactivated, table 9.3.5-2 applies for an inter-frequency carrier configured only by MCG.

$M_{\text{pss/sss_sync_inter}}$: For a UE supporting FR2-1 power class 1 or 5, $M_{\text{pss/sss_sync_inter}} = 64$ samples. For a UE supporting FR2-1 power class 2, $M_{\text{pss/sss_sync_inter}} = 40$ samples. For a UE supporting FR2-1 power class 3, $M_{\text{pss/sss_sync_inter}} = 40$ samples. For a UE supporting FR2-1 power class 4, $M_{\text{pss/sss_sync_inter}} = 40$ samples. For a UE supporting FR2-2 power class 1, $M_{\text{pss/sss_sync_inter}} = 96$. For a UE supporting FR2-2 power class 2, $M_{\text{pss/sss_sync_inter}} = 60$. For a UE supporting FR2-2 power class 3, $M_{\text{pss/sss_sync_inter}} = 60$.

$M_{\text{SSB_index_inter}}$: For a UE supporting FR2-1 power class 1 or 5, $M_{\text{SSB_index_inter}} = 40$ samples. For a UE supporting FR2 power class 2, $M_{\text{SSB_index_inter}} = 24$ samples. For a UE supporting FR2-1 power class 3, $M_{\text{SSB_index_inter}} = 24$ samples. For a UE supporting FR2-1 power class 4, $M_{\text{SSB_index_inter}} = 24$ samples. For a UE supporting FR2-2 power class 2 or 3, $M_{\text{SSB_index_inter}} = 48$ samples. For a UE supporting FR2 power class 1, $M_{\text{SSB_index_inter}} = 72$ samples.

$M_{\text{meas_period_inter}}$: For a UE supporting FR2-1 power class 1 or 5, $M_{\text{meas_period_inter}} = 64$. For a UE supporting FR2-1 power class 2, $M_{\text{meas_period_inter}} = 40$. For a UE supporting FR2-1 power class 3, $M_{\text{meas_period_inter}} = 40$. For a UE supporting FR2-1 power class 4, $M_{\text{meas_period_inter}} = 40$. For a UE supporting FR2-2 power class 1, $M_{\text{meas_period_inter}} = 96$. For a UE supporting FR2-2 power class 2, $M_{\text{meas_period_inter}} = 60$. For a UE supporting FR2-2 power class 3, $M_{\text{meas_period_inter}} = 60$.

$\text{CSSF}_{\text{inter}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{within_gap},i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

K_{gap} is a scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. $K_{\text{gap}} = 1$ when the UE is not configured with concurrent measurement gaps. Otherwise, $K_{\text{gap}} = N_{\text{total}} / N_{\text{available}}$, where $N_{\text{available}}$ and N_{total} are calculated as follows:

- For a window W of duration $\max(\text{SMTC period}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gap(s) and per-FR measurement gap(s) within the same FR, and starting from the beginning of any SMTC occasion:
 - N_{total} is the total number of SMTC occasions that are covered by instances of the associated measurement gap within the window W , including those dropped and non-dropped instances of the associated measurement gap within the window, and
 - $N_{\text{available}}$ is the number of SMTC occasions that are covered by instances of the non-dropped associated measurement gap within the window W , after accounting for collisions between the measurement gaps by applying the measurement gap collision rule in section 9.1.8.3.

K_{gap} is only applicable for UE supporting *concurrentMeasGap-r17*. When concurrent measurement gaps are configured, requirements in this clause do not apply if $N_{\text{available}} = 0$.

Table 9.3.4-1: Time period for PSS/SSS detection (Frequency range FR1)

Condition ^{NOTE1,2}	$T_{\text{PSS/SSS_sync_inter}}$
No DRX	$\text{Max}(600\text{ms}, \text{Ceil}(8 * K_{\text{gap}}) \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(600\text{ms}, \text{Ceil}(8 * 1.5 * K_{\text{gap}}) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(8 * K_{\text{gap}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.	

Table 9.3.4-2: Time period for PSS/SSS detection, (Frequency range FR2)

Condition ^{NOTE1,2}	$T_{\text{PSS/SSS_sync_inter}}$
No DRX	$\text{Max}(600\text{ms}, \text{Ceil}(K_{\text{gap}} \times M_{\text{pss/sss_sync_inter}} \times K_{\text{FR}}) \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(600\text{ms}, \text{Ceil}(1.5 * K_{\text{gap}} \times M_{\text{pss/sss_sync_inter}} \times K_{\text{FR}}) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(K_{\text{gap}} \times M_{\text{pss/sss_sync_inter}} \times K_{\text{FR}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.	
NOTE 4: K_{FR} is a scaling factor depending on the frequency range and the SSB SCS. For FR2-1, $K_{\text{FR}} = 1$. For FR2-2: $K_{\text{FR}} = 1$ if the SCS of the SSB of the cell being detected is 120 kHz, $K_{\text{FR}} = 2$ if the SCS of the SSB of the cell being detected is 480 kHz, and $K_{\text{FR}} = 3$ if the SCS of the SSB of the cell being detected is 960 kHz.	

Table 9.3.4-3: Time period for time index detection (Frequency range FR1)

Condition ^{NOTE1,2}	$T_{\text{SSB_time_index_inter}}$
No DRX	$\text{Max}(120\text{ms}, \text{Ceil}(3 * K_{\text{gap}}) \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(120\text{ms}, \text{Ceil}(3 * 1.5 * K_{\text{gap}}) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(3 * K_{\text{gap}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.	

Table 9.3.4-4: Time period for time index detection (Frequency range FR2)

Condition ^{NOTE1,2}	$T_{\text{SSB_time_index_inter}}$
No DRX	$\text{Max}(200\text{ms}, \text{Ceil}(K_{\text{gap}} \times M_{\text{SSB_index_inter}}) \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(200\text{ms}, \text{Ceil}(1.5 * K_{\text{gap}} \times M_{\text{SSB_index_inter}}) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(K_{\text{gap}} \times M_{\text{SSB_index_inter}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.

Table 9.3.4-5: Time period for PSS/SSS detection when highSpeedMeasInterFreq-r17 is configured (Frequency range FR1)

Condition ^{NOTE1,2}	T_{PSS/SSS_sync_inter}
No DRX	$\max(600\text{ms}, N1 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{inter}$ $N1 = 7$
DRX cycle $\leq 160\text{ms}$	$\max(600\text{ms}, \text{ceil}(N2) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{inter}$ $N2 = 7 \times M2$
$160\text{ms} < \text{DRX cycle} \leq 320\text{ms}$	$\text{ceil}(N3) \times \text{DRX cycle} \times \text{CSSF}_{inter}$ $N3 = 7 \times M2$
DRX cycle $> 320\text{ms}$	$N4 \times \text{DRX cycle} \times \text{CSSF}_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: $M2 = 1.5$ if SMTC periodicity > 40 ms, otherwise $M2=1$	
NOTE 3: $N4=6$ if SMTC periodicity > 40 ms, otherwise $N4=5$	

Table 9.3.4-6: Time period for time index detection when highSpeedMeasInterFreq-r17 is configured (Frequency range FR1)

Condition ^{NOTE1,2}	$T_{SSB_time_index_inter}$
No DRX	$\text{Max}(120\text{ms}, 3 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{inter}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(120\text{ms}, \text{Ceil}(3 \times M2^{\text{NOTE3}}) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{inter}$
DRX cycle $> 320\text{ms}$	$3 \times \text{DRX cycle} \times \text{CSSF}_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: $M2 = 1.5$ if SMTC periodicity > 40 ms, otherwise $M2=1$.	

Table 9.3.4-7: Time period for PSS/SSS detection when the inter-frequency carrier is configured only by SCG and the SCG is deactivated (FR2)

Condition ^{NOTE1,2}	T_{PSS/SSS_sync_inter}
No DRX	$\text{Max}(600\text{ms}, \text{Ceil}(K_{gap} \times M_{pss/sss_sync_inter}) \times \text{Max}(\text{MGRP}, \text{measCyclePSCell})) \times \text{CSSF}_{inter}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(600\text{ms}, \text{Ceil}(1.5 \times K_{gap} \times M_{pss/sss_sync_inter}) \times \text{Max}(\text{MGRP}, \text{measCyclePSCell}, \text{DRX cycle})) \times \text{CSSF}_{inter}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(K_{gap} \times M_{pss/sss_sync_inter}) \times \text{Max}(\text{measCyclePSCell}, \text{DRX cycle}) \times \text{CSSF}_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group.	
NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.	

Table 9.3.4-8: Time period for time index detection when inter-frequency carrier is configured only by SCG and the SCG is deactivated (FR2)

Condition ^{NOTE1,2}	$T_{SSB_time_index_inter}$
No DRX	$\text{Max}(200\text{ms}, \text{Ceil}(K_{gap} \times M_{SSB_index_inter}) \times \text{Max}(\text{MGRP}, \text{measCyclePSCell})) \times \text{CSSF}_{inter}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(200\text{ms}, \text{Ceil}(1.5 \times K_{gap} \times M_{SSB_index_inter}) \times \text{Max}(\text{MGRP}, \text{measCyclePSCell}, \text{DRX cycle})) \times \text{CSSF}_{inter}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(K_{gap} \times M_{SSB_index_inter}) \times \text{Max}(\text{measCyclePSCell}, \text{DRX cycle}) \times \text{CSSF}_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1.	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.

9.3.4.1 Void

9.3.4.2 Void

9.3.5 Inter-frequency measurements

When measurement gaps are provided for inter frequency measurements, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 9.3.5-1 and 9.3.5-2. When *highSpeedMeasInterFreq-r17* is configured, and UE supports *measurementEnhancementInterFreq-r17*, $T_{SSB_measurement_period_inter}$ is specified in Table 9.3.5-3. When SCG is deactivated, $T_{SSB_measurement_period_inter}$ is specified in Table 9.3.5-4 applies for inter-frequency carrier configured by SCG and not configured by MCG and table 9.3.5-2 applies for inter-frequency carrier configured by both SCG and MCG. Regardless of whether the SCG is activated or deactivated, table 9.3.5-2 applies for an inter-frequency carrier configured only by MCG.

Table 9.3.5-1: Measurement period for inter-frequency measurements with gaps (Frequency FR1)

Condition ^{NOTE1,2}	$T_{SSB_measurement_period_inter}$
No DRX	$\text{Max}(200\text{ms}, \text{Ceil}(8 * K_{gap}) \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{inter}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(200\text{ms}, \text{Ceil}(8 * 1.5 * K_{gap}) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{inter}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(8 * K_{gap}) \times \text{DRX cycle} \times \text{CSSF}_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.	

Table 9.3.5-2: Measurement period for inter-frequency measurements with gaps (Frequency FR2)

Condition ^{NOTE1,2}	$T_{SSB_measurement_period_inter}$
No DRX	$\text{Max}(400\text{ms}, \text{Ceil}(K_{gap} \times M_{meas_period_inter}) \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{inter}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(400\text{ms}, \text{Ceil}(1.5 * K_{gap} \times M_{meas_period_inter}) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{inter}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(K_{gap} \times M_{meas_period_inter}) \times \text{DRX cycle} \times \text{CSSF}_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.	

Table 9.3.5-3: Measurement period for inter-frequency measurements with gaps when *highSpeedMeasInterFreq-r17* is configured (Frequency range FR1)

Condition ^{NOTE1,2}	$T_{SSB_measurement_period_inter}$
No DRX	$\text{max}(200\text{ms}, 7 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{inter}$
DRX cycle $\leq 160\text{ms}$	$\text{max}(200\text{ms}, \text{ceil}(7 \times M2^{\text{NOTE3}}) \times \text{max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{inter}$
$160\text{ms} < \text{DRX cycle} \leq 320\text{ms}$	$\text{ceil}(7 \times M2^{\text{NOTE3}}) \times \text{DRX cycle} \times \text{CSSF}_{inter}$
DRX cycle $> 320\text{ms}$	$4 \times M2^{\text{NOTE3}} \times \text{DRX cycle} \times \text{CSSF}_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: $M2 = 1.5$ if SMTC periodicity > 40 ms, otherwise $M2=1$	

Table 9.3.5-4: Measurement period for inter-frequency measurements with gaps when the inter-frequency carrier is configured only by SCG and the SCG is deactivated (FR2)

Condition ^{NOTE1,2}	$T_{SSB_measurement_period_inter}$
No DRX	$\text{Max}(400\text{ms}, \text{Ceil}(K_{gap} \times M_{meas_period_inter}) \times \text{Max}(MGRP, \text{measCyclePSCell})) \times CSSF_{inter}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(400\text{ms}, \text{Ceil}(1.5 * K_{gap} \times M_{meas_period_inter}) \times \text{Max}(MGRP, \text{measCyclePSCell}, \text{DRX cycle})) \times CSSF_{inter}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(K_{gap} \times M_{meas_period_inter}) \times \text{Max}(\text{measCyclePSCell}, \text{DRX cycle}) \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1.	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: For a UE supporting concurrent gaps, the MRGP above is the MRGP of the measurement gap associated with the target frequency layer to be measured if concurrent measurement gaps are configured.	

9.3.5.1 Void

9.3.5.2 Void

9.3.5.3 Void

9.3.6 Inter-frequency measurements reporting requirements

9.3.6.1 Periodic Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

9.3.6.2 Event-triggered Periodic Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered periodic measurement reports shall meet the requirements in clauses 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.3.6.3.

9.3.6.3 Event-triggered Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within $T_{identify_inter_without_index}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{identify_inter_with_index}$. Both $T_{identify_inter_without_index}$ and $T_{identify_inter_with_index}$ are defined in clause 9.3.4. When L3 filtering is used an additional delay can be expected. In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or in both FR1 and FR2 if the UE is not capable of per-FR gap.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{\text{identify_inter_without_index}}$ or $T_{\text{identify_inter_with_index}}$ as defined in clause 9.3.4 or clause 9.3.9.1 or clause 9.3.10.1. If a cell which has been detectable at least for the time period $T_{\text{identify_inter_without_index}}$ or $T_{\text{identify_inter_with_index}}$ defined in clause 9.3.4 or clause 9.3.9.1 or clause 9.3.10.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{\text{SSB_measurement_period_intra}}$ provided the timing to that cell has not changed more than $\pm 3200/2^\mu T_c$ while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected. In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

9.3.7 Void

9.3.8 Inter-frequency SFTD measurement requirements

9.3.8.1 Introduction

This clause contains requirements for a UE supporting NR inter-frequency SFTD measurement and is applicable in RRC_CONNECTED state. The UE shall, depending on network request, perform inter-frequency SFTD measurement and report SFTD result with or without SS-RSRP. The overall delay includes RRC procedure delay defined in clause 12 in TS 38.331 [2] and SFTD measurement reporting delay in clause 9.3.8.3.

UE which fulfils the requirements in clause 9.3.8 is not supposed to fulfil the requirements defined in clause 9.2.5.4.

9.3.8.2 SFTD Measurement delay

The requirements on SFTD measurement delay defined in this clause are applicable under the side condition $\hat{E}_s/\hat{I}_{ot} \geq -3$ dB for the inter-frequency neighbour cell. Depending on configuration, the SFTD measurement may be carried out with or without the support of configured measurement gaps. In the current release, indication on whether to carry out the SFTD measurement with or without measurement gaps is implicit and depending on whether measurement gaps are configured.

The UE shall be able to detect, identify and measure SFTD of up to 3 of the strongest applicable inter-frequency neighbour cells on the carrier frequency provided in the SFTD measurement configuration. Further depending on the SFTD measurement configuration, the UE shall additionally report SS-RSRP for the one or more strongest cells. The UE may or may not be configured with *cellsForWhichToReportSFTD*. The UE does not expect *cellsForWhichToReportSFTD* to change during an ongoing SFTD measurement.

When no measurement gaps are provided, the UE shall be capable of finding the inter-frequency neighbour cell regardless of its SSB position in the SMTC period, provided that the carrier frequency where SFTD measurement is configured and the serving carrier(s) form a supported CA or NR-DC band combination of the UE. The SFTD measurement shall be conducted with sustained connection to the PCell and activated SCell(s) in MCG. Depending on capability, the UE may be allowed to cause a certain amount of interruptions for reconfiguration of the radio receiver, as specified in clause 8.2.2.2.6.

When measurement gaps are provided, the UE shall be capable of finding the inter-frequency neighbour cell under the additional condition that the SSB at least occasionally falls within the measurement gap.

When no DRX is used, the UE shall be capable of determining SFTD within a physical layer measurement period of $T_{\text{measure_SFTD1}}$ as follows:

- For SFTD measurements without measurement gaps, and without additional SS-RSRP reporting:
 - For carrier frequency in FR1: $T_{\text{measure_SFTD1}} = 14$ SMTC periods
 - For carrier frequency in FR2: $T_{\text{measure_SFTD1}} = 112$ SMTC periods
- For SFTD measurements in measurement gaps, and without additional SS-RSRP reporting:

- For carrier frequency in FR1: $T_{\text{measure_SFTD1}} = \text{CSSF}_{\text{inter}} \times 8 \times \text{Max}(\text{MGRP}, \text{SMTC period})$
- For carrier frequency in FR2: $T_{\text{measure_SFTD1}} = \text{CSSF}_{\text{inter}} \times 64 \times \text{Max}(\text{MGRP}, \text{SMTC period})$
- For SFTD measurements without measurement gaps, and with additional SS-RSRP reporting:
 - For carrier frequency in FR1: $T_{\text{measure_SFTD1}} = 19 \text{ SMTC periods}$
 - For carrier frequency in FR2: $T_{\text{measure_SFTD1}} = 152 \text{ SMTC periods}$
- For SFTD measurements in measurement gaps, and with additional SS-RSRP reporting:
 - For carrier frequency in FR1: $T_{\text{measure_SFTD1}} = \text{CSSF}_{\text{inter}} \times 13 \times \text{Max}(\text{MGRP}, \text{SMTC period})$
 - For carrier frequency in FR2: $T_{\text{measure_SFTD1}} = \text{CSSF}_{\text{inter}} \times 104 \times \text{Max}(\text{MGRP}, \text{SMTC period})$

where $\text{CSSF}_{\text{inter}}$ is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{within_gap},i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

When DRX is used, the same $T_{\text{measure_SFTD1}}$ as for non-DRX applies, but the reporting delay depends on the DRX cycle length in use.

In case PCell is changed due to handover, the UE shall terminate the inter-frequency SFTD measurement.

The measurement accuracy for the SFTD measurement shall fulfil the requirement in clause 10.1.21.3. The measurement accuracy for additionally reported SS-RSRP shall fulfil the requirement in clauses 10.1.4.1 and 10.1.5.1 for neighbour cell in FR1 and FR2, respectively.

9.3.8.3 SFTD Measurement reporting delay

The SFTD measurement reporting delay is defined as the time between a command that will trigger an SFTD measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of $2 \times \text{TTI}_{\text{DCCH}}$ resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The SFTD measurement reporting delay shall be less than $T_{\text{measure_SFTD1}}$ defined in clause 9.3.8.2 plus the RRC procedure delay defined in TS 38.331 [2].

9.3.9 Inter frequency measurements without measurement gaps

9.3.9.1 Inter frequency Cell identification

UE satisfying the applicability conditions specified in 9.3.1 on the requirement in this clause shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_without_index}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured) or *deriveSSB-IndexFromCellInter-r17* is configured for the FR1 and FR2-1 target frequency layers and and UE supporting *deriveSSB-IndexFromCellInterNon-NCSSG-r17*. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_with_index}}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{\text{identify_inter_without_index}}$.

- For inter-frequency SSB based measurements without measurement gaps in active BWP, it is assumed that when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1 and FR2, SFN and frame boundary across serving cell and inter-frequency neighbor cells is aligned

$$T_{\text{identify_inter_without_index}} = (T_{\text{PSS/SSS_sync_inter}} + T_{\text{SSB_measurement_period_inter}}) \text{ ms}$$

$$T_{\text{identify_inter_with_index}} = (T_{\text{PSS/SSS_sync_inter}} + T_{\text{SSB_measurement_period_inter}} + T_{\text{SSB_time_index_inter}}) \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_inter}}$: it is the time period used in PSS/SSS detection given in table 9.3.9.1-1 and table 9.3.9.1-2.

$T_{SSB_time_index_inter}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3.9.1-3 and table 9.3.9.1-4.

$T_{SSB_measurement_period_inter}$: equal to a measurement period of SSB based measurement given in table 9.3.9.2-1, table 9.3.9.2-2, and table 9.3.9.2-3 and table 9.3.9.2-3a when *highSpeedMeasInterFreq-r17* is configured and UE supports measurementEnhancementInterFreq-r17.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{outside_gap,i}$ in clause 9.1.5.1 for measurement conducted outside GAP, i.e. when interfrequency SMTC is fully non overlapping or partially overlapping with GAPs.

For inter-frequency SSB based measurements without measurement gaps in active BWP

M_{pss/sss_sync_inter} : For a UE supporting FR2-1 power class 1 or 5, $M_{pss/sss_sync_inter} = 40$. For a UE supporting FR2-1 power class 2, $M_{pss/sss_sync_inter} = 24$. For a UE supporting FR2-1 power class 3, $M_{pss/sss_sync_inter} = 24$. For a UE supporting FR2-1 power class 4, $M_{pss/sss_sync_inter} = 24$. For a UE supporting FR2-2 power class 1, $M_{pss/sss_sync_inter} = 60$. For a UE supporting FR2-2 power class 2, $M_{pss/sss_sync_inter} = 36$. For a UE supporting FR2-2 power class 3, $M_{pss/sss_sync_inter} = 36$. For FR1, $M_{pss/sss_sync_inter} = 5$.

$M_{SSB_index_inter}$: For a UE supporting FR2-2 power class 1, $M_{SSB_index_inter} = 72$. For a UE supporting FR2-2 power class 2, $M_{SSB_index_inter} = 48$. For a UE supporting FR2-2 power class 3, $M_{SSB_index_inter} = 48$. For FR1, $M_{SSB_index_inter} = 3$.

$M_{meas_period_inter}$: For a UE supporting FR2-1 power class 1 or 5, $M_{meas_period_inter} = 40$. For a vehicle mounted UE supporting FR2-1 power class 2, $M_{pss/sss_sync_inter} = 24$. For a UE supporting FR2-1 power class 3, $M_{meas_period_inter} = 24$. For a UE supporting FR2-1 power class 4, $M_{meas_period_inter} = 24$. For a UE supporting FR2-2 power class 1, $M_{meas_period_inter} = 60$. For a UE supporting FR2-2 power class 2, $M_{pss/sss_sync_inter} = 36$. For a UE supporting FR2-2 power class 3, $M_{meas_period_inter} = 36$. For FR1, $M_{meas_period_inter} = 5$.

If the UE indicates ‘nogap-noncsg’ via *NeedForGapNCSG-InfoNR* for the inter-frequency measurement,

M_{pss/sss_sync_inter} : For a UE supporting FR2-1 power class 1 or 5, $M_{pss/sss_sync_inter} = 64$ samples. For a UE supporting FR2-1 power class 2, $M_{pss/sss_sync_inter} = 40$ samples. For a UE supporting FR2-1 power class 3, $M_{pss/sss_sync_inter} = 40$ samples. For a UE supporting FR2-1 power class 4, $M_{pss/sss_sync_inter} = 40$ samples. For a UE supporting FR2-2 power class 1, $M_{pss/sss_sync_inter} = 96$. For a UE supporting FR2-2 power class 2, $M_{pss/sss_sync_inter} = 60$. For a UE supporting FR2-2 power class 3, $M_{pss/sss_sync_inter} = 60$. For FR1, $M_{pss/sss_sync_inter} = 8$.

$M_{SSB_index_inter}$: For a UE supporting FR2-1 power class 1 or 5, $M_{SSB_index_inter} = 40$ samples. For a UE supporting FR2 power class 2, $M_{SSB_index_inter} = 24$ samples. For a UE supporting FR2-1 power class 3, $M_{SSB_index_inter} = 24$ samples. For a UE supporting FR2-1 power class 4, $M_{SSB_index_inter} = 24$ samples. For a UE supporting FR2-2 power class 2 or 3, $M_{SSB_index_inter} = 48$ samples. For a UE supporting FR2 power class 1, $M_{SSB_index_inter} = 72$ samples. For FR1, $M_{SSB_index_inter} = 3$.

$M_{meas_period_inter}$: For a UE supporting FR2-1 power class 1 or 5, $M_{meas_period_inter} = 64$. For a UE supporting FR2-1 power class 2, $M_{meas_period_inter} = 40$. For a UE supporting FR2-1 power class 3, $M_{meas_period_inter} = 40$. For a UE supporting FR2-1 power class 4, $M_{meas_period_inter} = 40$. For a UE supporting FR2-2 power class 1, $M_{meas_period_inter} = 96$. For a UE supporting FR2-2 power class 2, $M_{meas_period_inter} = 60$. For a UE supporting FR2-2 power class 3, $M_{meas_period_inter} = 60$. For FR1, $M_{meas_period_inter} = 8$. When UE supports *concurrentMeasGap-r17* and is configured with concurrent measurement gaps,

K_p is a scaling factor for an SSB frequency layer to be measured without measurement gaps. $K_p = N_{total} / N_{available}$, where $N_{available}$ and N_{total} are calculated as follows:

For a window W of duration $\max(\text{SMTC period}, \text{MGRP_max})$, where MGRP max is the maximum MGRP across all configured per-UE MG and per-FR MG within the same FR as the SSB frequency layer, and starting at the beginning of any SMTC occasion:

N_{total} is the total number of SMTC occasions within the window, including those overlapped with MG occasions within the window, and

$N_{available}$ is the number of SMTC occasions that are not overlapped with any non-dropped MG occasion within the window W , after accounting for MG collisions by applying the selected gap collision rule provided that concurrent measurement gaps are configured.

$K_p = 1$ when $N_{available} = 0$.

Otherwise, when UE is not configured with or UE does not support concurrent measurement gaps:

When interfrequency SMTC is fully non overlapping with measurement gaps or NCSG, or interfrequency SMTC is fully overlapping with MGs or NCSG, $K_p = 1$.

When interfrequency SMTC is partially overlapping with measurement gaps, $K_p = 1/(1 - (\text{SMTC period} / \text{MGRP}))$, where $\text{SMTC period} < \text{MGRP}$. When inter-frequency SMTC is partially overlapping with NCSG, $K_p = 1/(1 - (\text{SMTC period} / \text{VIRP}))$, where $\text{SMTC period} < \text{VIRP}$.

For FR2,

- $K_{\text{layer1_measurement}} = 1$,

if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by inter-frequency SMTC occasions, or

- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by inter-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured, where SSB symbols are indicated by *SSB-ToMeasure* and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{\text{layer1_measurement}} = 1.5$, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

For calculation of K_p , if the high layer signalling (TS 38.331 [2]) of *smtc2* is configured, for cells indicated in the *pci-List* parameter in *smtc2*, the SMTC periodicity corresponds to the value of higher layer parameter *smtc2*; for the other cells, the SMTC periodicity corresponds to the value of higher layer parameter *smtc1*.

Table 9.3.9.1-1: Time period for PSS/SSS detection, (FR1)

DRX cycle	$T_{\text{PSS/SSS_sync_inter}}$
No DRX	$\max(600\text{ms}, \text{ceil}(\text{M}_{\text{pss/sss_sync_inter}} \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{inter}}$
$\text{DRX cycle} \leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(M_2 \times \text{M}_{\text{pss/sss_sync_inter}} \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}}$
$\text{DRX cycle} > 320\text{ms}$	$\text{ceil}(\text{M}_{\text{pss/sss_sync_inter}} \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: Void	
NOTE 3: When <i>highSpeedMeasInterFreq-r17</i> is not configured, $M_2 = 1.5$; When <i>highSpeedMeasInterFreq-r17</i> is configured, $M_2 = 1.5$ if SMTC periodicity > 40 ms; otherwise $M_2 = 1$	

Table 9.3.9.1-2: Time period for PSS/SSS detection, (FR2)

DRX cycle	$T_{\text{PSS/SSS_sync_inter}}$
No DRX	$\max(600\text{ms}, \text{ceil}(\text{M}_{\text{pss/sss_sync_inter}} \times K_p \times K_{\text{layer1_measurement}}) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{inter}}$
$\text{DRX cycle} \leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(1.5 \times \text{M}_{\text{pss/sss_sync_inter}} \times K_p \times K_{\text{layer1_measurement}}) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}}$
$\text{DRX cycle} > 320\text{ms}$	$\text{ceil}(\text{M}_{\text{pss/sss_sync_inter}} \times K_p \times K_{\text{layer1_measurement}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: Void	

Table 9.3.9.1-3: Time period for time index detection (FR1)

DRX cycle	$T_{SSB_time_index_inter}$
No DRX	$\max(120\text{ms}, \text{ceil}(M_{SSB_index_inter} \times K_p) \times \text{SMTC period})^{Note\ 1} \times CSSF_{inter}$
DRX cycle $\leq 320\text{ms}$	$\max(120\text{ms}, \text{ceil}(M_2 \times M_{SSB_index_inter} \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times CSSF_{inter}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(M_{SSB_index_inter} \times K_p) \times \text{DRX cycle} \times CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: Void	
NOTE 3: When <i>highSpeedMeasInterFreq-r17</i> is not configured, $M_2 = 1.5$; When <i>highSpeedMeasInterFreq-r17</i> is configured, $M_2 = 1.5$ if SMTC periodicity > 40 ms; otherwise $M_2 = 1$	

Table 9.3.9.1-4: Time period for time index detection (FR2)

Condition ^{NOTE1,2}	$T_{SSB_time_index_inter}$
No DRX	$\text{Max}(200\text{ms}, \text{Ceil}(M_{SSB_index_inter} \times K_p) \times \text{SMTC period}) \times CSSF_{inter}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(200\text{ms}, \text{Ceil}(1.5 \times M_{SSB_index_inter} \times K_p) \times \text{Max}(\text{SMTC period}, \text{DRX cycle})) \times CSSF_{inter}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(M_{SSB_index_inter} \times K_p) \times \text{DRX cycle} \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: K_p is applicable for UE supporting <i>concurrentMeasGap-r17</i>	

9.3.9.2 Measurement period

The UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 9.3.9.2-1 and 9.3.9.2-2, if UE supports inter-frequency measurement without measurement gaps. When *highSpeedMeasInterFreq-r17* is configured and UE supports [measurementEnhancementInterFreq-r17], $T_{SSB_measurement_period_inter}$ is specified in table 9.3.9.2-3.

Table 9.3.9.2-1: Measurement period for inter-frequency measurements without gaps ((FR1)

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	$\max(200\text{ms}, \text{ceil}(M_{meas_period_inter} \times K_p) \times \text{SMTC period})^{Note\ 1} \times CSSF_{inter}$
DRX cycle $\leq 320\text{ms}$	$\max(200\text{ms}, \text{ceil}(1.5 \times M_{meas_period_inter} \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times CSSF_{inter}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M_{meas_period_inter} \times K_p) \times \text{DRX cycle} \times CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.3.9.2-2: Measurement period for inter-frequency measurements without gaps (FR2)

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	$\max(400\text{ms}, \text{ceil}(M_{meas_period_inter} \times K_p \times K_{layer1_measurement}) \times \text{SMTC period})^{Note\ 1} \times CSSF_{inter}$
DRX cycle $\leq 320\text{ms}$	$\max(400\text{ms}, \text{ceil}(1.5 \times M_{meas_period_inter} \times K_p \times K_{layer1_measurement}) \times \max(\text{SMTC period}, \text{DRX cycle})) \times CSSF_{inter}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M_{meas_period_inter} \times K_p \times K_{layer1_measurement}) \times \text{DRX cycle} \times CSSF_{inter}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.3.9.2-3: Measurement period for inter-frequency measurements without gaps in the active BWP when *highSpeedMeasInterFreq-r17* is configured (FR1)

DRX cycle	$T_{SSB_measurement_period_inter}$
No DRX	$\max(200\text{ms}, \text{ceil}(5 \times K_p) \times \text{SMTC period})^{Note\ 1} \times CSSF_{inter}$

DRX cycle ≤ 160ms	$\max(200\text{ms}, \text{ceil}(5 \times M2^{\text{Note 2}} \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}}$
160ms < DRX cycle ≤ 320ms	$\text{ceil}(4 \times M2^{\text{Note 2}} \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle}) \times \text{CSSF}_{\text{inter}}$
DRX cycle > 320ms	$\text{ceil}(Y^{\text{Note 3}} \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: M2 = 1.5 if SMTC period > 40 ms, otherwise M2 = 1	
NOTE 3: Y=3 when SMTC period ≤ 40ms, Y=5 when SMTC period > 40ms	

Table 9.3.9.2-3a: Measurement period for inter-frequency measurements without gaps when highSpeedMeasInterFreq-r17 is configured (FR1), UE supporting 'nogap-noncsg'

Condition ^{NOTE1,2}	$T_{\text{SSB_measurement_period_inter}}$
No DRX	$\max(200\text{ms}, 7 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{inter}}$
DRX cycle ≤ 160ms	$\max(200\text{ms}, \text{ceil}(7 \times M2^{\text{NOTE3}}) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}}$
160ms < DRX cycle ≤ 320ms	$\text{ceil}(7 \times M2^{\text{NOTE3}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$
DRX cycle > 320ms	$4 \times M2^{\text{NOTE3}} \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: M2 = 1.5 if SMTC periodicity > 40 ms, otherwise M2=1	

9.3.9.3 Scheduling availability of UE during inter-frequency measurements when the SSB is completely contained in the active BWP of the UE

If UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network, UE is required to be capable of measuring without measurement gaps when the SSB is completely contained in the active bandwidth part of the UE. When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols to be measured in the following clauses are the SSB symbols indicated by SSB-ToMeasure [2], if it is configured; otherwise, all L SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

The scheduling availability requirements when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1 and FR2 in clause 9.3.9.3.1~9.3.9.3.3 are valid under the following conditions:

- SFN and frame boundary across serving cell and inter-frequency neighbor cells is aligned

9.3.9.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When UE performs inter-frequency measurements without measurement gaps in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

When UE performs inter-frequency measurements without measurement gaps in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

When TDD intra-band carrier aggregation is performed, the scheduling restrictions due to one serving cell also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

9.3.9.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology-Inter-r16* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement

- If UE performs inter-frequency measurements without measurement gaps in a TDD band, UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.
- If UE performs inter-frequency measurements without measurement gaps in a FDD band, UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO i include
 - serving cell symbols fully or partially overlap with SSB symbols to be measured on MO i , and Δt serving cell symbol before each consecutive SSB symbols to be measured and Δt serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO i and UE supporting *deriveSSB-IndexFromCellInterNon-NCSSG-r17*. Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9, or
 - serving cell symbols fully or partially overlap with SMTC window for MO i and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO i , or UE not supporting *deriveSSB-IndexFromCellInterNon-NCSSG-r17*.

When intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

9.3.9.3.3 Scheduling availability of UE performing measurements on FR2

The following scheduling restriction applies due to SS-RSRP or SS-SINR measurement on an FR2 inter-frequency cell

The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

The following scheduling restriction applies to SS-RSRQ measurement on an FR2 inter-frequency cell

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

When intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

If following conditions are met:

- The UE has been notified about system information update through paging,
- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots.

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, the UE shall receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, the UE shall receive PDSCH that corresponds to the PDCCH that the UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured.

9.3.9.3.4 Scheduling availability of UE performing measurements on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 serving cell(s) due to measurements performed on FR2 serving cell frequency layer.

There are no scheduling restrictions on FR2 serving cell(s) due to measurements performed on FR1 serving cell frequency layer.

9.3.9.4 Scheduling availability of UE during inter-frequency measurements when the SSB is not completely contained in the active BWP of the UE

If UE supports *nr-NeedForGapNCSG-reporting-r17* and indicates *nogap-noncsg* in *NeedForGapNCSG-InfoNR* for inter-frequency measurement, UE is required to be capable of measuring without measurement gaps when the SSB is not completely contained in the active bandwidth part of the UE. When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols indicated by the union set of *SSB-ToMeasure* from all the configured measurement objects on the same serving carrier which can be merged [2], if it is configured; otherwise, all *L* SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

The requirements in clause 9.3.9.4 based on *deriveSSB-IndexFromCell-inter* apply provided that UE supports *ncsg-SymbolLevelScheduleRestrictionInter-r17*. If UE does not support *ncsg-SymbolLevelScheduleRestrictionInter-r17*, the requirements in clause 9.3.9.4.3 apply assuming *deriveSSB-IndexFromCell-inter* is not enabled.

9.3.9.4.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When the UE performs inter-frequency measurements without MG and NCSG in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement when (1) *simultaneousRxTxInterBandCA* is not supported for the target measurement band and the serving cell's band, or (2) target measurement and the serving cell are on the same band or on the band with overlapping DL frequency with UE's serving cell(s).

The UE is not expected to transmit PUCCH/PUSCH/SRS on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO *i*, and Δt serving cell symbol before each consecutive SSB symbols to be measured and Δt serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO *i*. Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9.
- serving cell symbols fully or partially overlap with SMTC window for MO *i* and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO *i*.

When the UE performs inter-frequency measurements without MG and NCSG in a TDD band, the following restrictions apply due to SS-RSRQ measurement when *simultaneousRxTxInterBandCA* is not supported for the target measurement band and the serving cell band

The UE is not expected to transmit PUCCH/PUSCH/SRS on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO *i*, and Δt serving cell symbol before each consecutive SSB symbols to be measured and RSSI measurement symbols, and Δt serving cell symbol after each consecutive SSB symbols to be measured and RSSI measurement symbols within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO *i*. Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9.
- serving cell symbols fully or partially overlap with SMTC window for MO *i* and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO *i*.

If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the SMTC periodicity follows *smtc2*; Otherwise SMTC periodicity follows *smtc1*.

9.3.9.4.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement when the target inter-frequency layer to be measured is on the same band with UE's serving cell(s) or on the band with overlapping DL frequency with UE's serving cell(s).

- The UE is not expected to receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include
- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO *i*, and Δt serving cell symbol before each consecutive SSB symbols to be measured and Δt serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO *i*. Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9.
- serving cell symbols fully or partially overlap with SMTC window for MO *i* and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO *i*,

If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

9.3.9.4.3 Scheduling availability of UE performing measurements on FR2

When (1) UE does not support IBM between target measurement band and serving cell's band(s) nor *simultaneousRxTxInterBandCA*, or (2) target measurement and a serving cell are on the same band, the following scheduling restriction applies to the serving cell due to SS-RSRP or SS-SINR measurement on an FR2 inter-frequency cell without MG and NCSG:

The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO *i*, and Δt serving cell symbol before each consecutive SSB symbols to be measured and Δt serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO *i*. Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.8.
- serving cell symbols fully or partially overlap with SMTC window for MO *i* and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO *i*,

and due to SS-RSRQ measurement on an FR2 inter-frequency cell without MG and NCSG

The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO *i*, and Δt serving cell symbol before each consecutive SSB symbols to be measured and RSSI measurement symbols, and Δt serving cell symbol after each consecutive SSB symbols to be measured and RSSI measurement symbols within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO *i*. Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.8.

- serving cell symbols fully or partially overlap with SMTC window for MO i and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO i .

When UE does not support IBM between target measurement band and serving cell's band(s) but supports *simultaneousRxTxInterBandCA*, the following scheduling restriction applies to the serving cell due to SS-RSRP or SS-SINR measurement on an FR2 inter-frequency cell without MG and NCSG

The UE is not expected to receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO i include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO i , and Δt serving cell symbol before each consecutive SSB symbols to be measured and Δt serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO i . Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9.
- serving cell symbols fully or partially overlap with SMTC window for MO i and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO i ,

and due to SS-RSRQ measurement on an FR2 inter-frequency cell without MG and NCSG

The UE is not expected to receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO i include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO i , and Δt serving cell symbol before each consecutive SSB symbols to be measured and RSSI measurement symbols, and Δt serving cell symbol after each consecutive SSB symbols to be measured and RSSI measurement symbols within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO i . Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.8.
- serving cell symbols fully or partially overlap with SMTC window for MO i and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO i .

When UE supports IBM between target measurement band and serving cell's band(s) but not *simultaneousRxTxInterBandCA*, the following scheduling restriction applies to the serving cell due to SS-RSRP or SS-SINR measurement on an FR2 inter-frequency cell without MG and NCSG

The UE is not expected to transmit PUCCH/PUSCH/SRS on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO i include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO i , and Δt serving cell symbol before each consecutive SSB symbols to be measured and Δt serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO i . Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9..
- serving cell symbols fully or partially overlap with SMTC window for MO i and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO i ,

and due to SS-RSRQ measurement on an FR2 inter-frequency cell without MG and NCSG

The UE is not expected to transmit PUCCH/PUSCH/SRS on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO i include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO i , and Δt serving cell symbol before each consecutive SSB symbols to be measured and RSSI measurement symbols, and Δt serving cell symbol after each consecutive SSB symbols to be measured and RSSI measurement symbols within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO i . Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9.

- serving cell symbols fully or partially overlap with SMTC window for MO i and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO i .

If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

When UE supports IBM between target measurement band and serving cell's band(s) and *simultaneousRxTxInterBandCA*, no scheduling restriction applies to the serving cell.

If following conditions are met:

- The UE has been notified about system information update through paging,
- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, the UE shall receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, the UE shall receive PDSCH that corresponds to the PDCCH that the UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured.

9.3.9.4.4 Scheduling availability of UE performing measurements on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 serving cell(s) due to measurements performed on FR2 frequency layer.

There are no scheduling restrictions on FR2 serving cell(s) due to measurements performed on FR1 frequency layer.

9.3.10 Inter-frequency measurement with NCSG

9.3.10.1 Inter-frequency cell identification

For the UE supporting NCSG, if NCSG is provided, the UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_without_index}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured) or *deriveSSB-IndexFromCellInter-r17* is configured. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_with_index}}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{\text{identify_inter_without_index}}$.

$$T_{\text{identify_inter_without_index}} = (T_{\text{PSS/SSS_sync_inter}} + T_{\text{SSB_measurement_period_inter}}) \text{ ms}$$

$$T_{\text{identify_inter_with_index}} = (T_{\text{PSS/SSS_sync_inter}} + T_{\text{SSB_measurement_period_inter}} + T_{\text{SSB_time_index_inter}}) \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_inter}}$: it is the time period used in PSS/SSS detection given in table 9.3.10.1-1 and table 9.3.10.1-2.

$T_{\text{SSB_time_index_inter}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3.10.1-3 and table 9.3.10.1-4.

$T_{\text{SSB_measurement_period_inter}}$: equal to a measurement period of SSB based measurement given in table 9.3.10.2-1 and table 9.3.10.2-2.

$M_{\text{pss/sss_sync_inter}}$: For a UE supporting FR2 power class 1 or 5, $M_{\text{pss/sss_sync_inter}} = 64$ samples. For a UE supporting FR2 power class 2, $M_{\text{pss/sss_sync_inter}} = 40$ samples. For a UE supporting FR2 power class 3, $M_{\text{pss/sss_sync_inter}} = 40$ samples. For a UE supporting FR2 power class 4, $M_{\text{pss/sss_sync_inter}} = 40$ samples.

$M_{SSB_index_inter}$: For a UE supporting FR2 power class 1 or 5, $M_{SSB_index_inter} = 40$ samples. For a UE supporting FR2 power class 2, $M_{SSB_index_inter} = 24$ samples. For a UE supporting FR2 power class 3, $M_{SSB_index_inter} = 24$ samples. For a UE supporting FR2 power class 4, $M_{SSB_index_inter} = 24$ samples.

$M_{meas_period_inter}$: For a UE supporting FR2 power class 1 or 5, $M_{meas_period_inter} = 64$ samples. For a UE supporting FR2 power class 2, $M_{meas_period_inter} = 40$ samples. For a UE supporting FR2 power class 3, $M_{meas_period_inter} = 40$ samples. For a UE supporting FR2 power class 4, $M_{meas_period_inter} = 40$ samples.

$CSSF_{inter}$: it is a carrier specific scaling factor and is determined according to $CSSF_{within_ncsg,i}$ in clause 9.1.5.x for measurement conducted within NCSG.

Table 9.3.10.1-1: Time period for PSS/SSS detection with NCSG (FR1)

Condition ^{NOTE1,2}	T_{PSS/SSS_sync_inter}
No DRX	$\text{Max}(600\text{ms}, 8 \times \text{Max}(\text{VIRP, SMTC period})) \times CSSF_{inter}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(600\text{ms}, \text{Ceil}(8 \times 1.5) \times \text{Max}(\text{VIRP, SMTC period, DRX cycle})) \times CSSF_{inter}$
DRX cycle $> 320\text{ms}$	$8 \times \text{DRX cycle} \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 9.3.10.1-2: Time period for PSS/SSS detection with NCSG (FR2)

Condition ^{NOTE1,2}	T_{PSS/SSS_sync_inter}
No DRX	$\text{Max}(600\text{ms}, M_{pss/sss_sync_inter} \times \text{Max}(\text{VIRP, SMTC period})) \times CSSF_{inter}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(600\text{ms}, (1.5 \times M_{pss/sss_sync_inter}) \times \text{Max}(\text{VIRP, SMTC period, DRX cycle})) \times CSSF_{inter}$
DRX cycle $> 320\text{ms}$	$M_{pss/sss_sync_inter} \times \text{DRX cycle} \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 9.3.10.1-3: Time period for time index detection with NCSG (FR1)

Condition ^{NOTE1,2}	$T_{SSB_time_index_inter}$
No DRX	$\text{Max}(120\text{ms}, 3 \times \text{Max}(\text{VIRP, SMTC period})) \times CSSF_{inter}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(120\text{ms}, \text{Ceil}(3 \times 1.5) \times \text{Max}(\text{VIRP, SMTC period, DRX cycle})) \times CSSF_{inter}$
DRX cycle $> 320\text{ms}$	$3 \times \text{DRX cycle} \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 9.3.10.1-4: Time period for time index detection with NCSG (FR2)

Condition ^{NOTE1,2}	$T_{SSB_time_index_inter}$
No DRX	$\text{Max}(200\text{ms}, M_{SSB_index_inter} \times \text{Max}(\text{VIRP, SMTC period})) \times CSSF_{inter}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(200\text{ms}, (1.5 \times M_{SSB_index_inter}) \times \text{Max}(\text{VIRP, SMTC period, DRX cycle})) \times CSSF_{inter}$
DRX cycle $> 320\text{ms}$	$M_{SSB_index_inter} \times \text{DRX cycle} \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

9.3.10.2 Measurement period

When NCSG are provided for inter frequency measurements, the UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1.4, 10.1.5, 10.1.9, 10.1.10, 10.1.14 and 10.1.15, respectively, as shown in table 9.3.10.2-1 and 9.3.10.2-2:

Table 9.3.10.2-1: Measurement period for inter-frequency measurements with NCSG (FR1)

Condition ^{NOTE1,2}	$T_{SSB_measurement_period_inter}$
No DRX	$\text{Max}(200\text{ms}, 8 \times \text{Max}(\text{VIRP}, \text{SMTC period})) \times \text{CSSF}_{inter}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(200\text{ms}, \text{Ceil}(8 \times 1.5) \times \text{Max}(\text{VIRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{inter}$
DRX cycle $> 320\text{ms}$	$8 \times \text{DRX cycle} \times \text{CSSF}_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

Table 9.3.10.2-2: Measurement period for inter-frequency measurements with NCSG (FR2)

Condition ^{NOTE1,2}	$T_{SSB_measurement_period_inter}$
No DRX	$\text{Max}(400\text{ms}, M_{meas_period_inter} \times \text{Max}(\text{VIRP}, \text{SMTC period})) \times \text{CSSF}_{inter}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(400\text{ms}, (1.5 \times M_{meas_period_inter}) \times \text{Max}(\text{VIRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{inter}$
DRX cycle $> 320\text{ms}$	$M_{meas_period_inter} \times \text{DRX cycle} \times \text{CSSF}_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	

9.3.10.3 Scheduling availability during inter-frequency measurement with NCSG

When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols indicated by the union set of *SSB-ToMeasure* from all the configured measurement objects on the same serving carrier which can be merged [2], if it is configured; otherwise, all *L* SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

The requirements in clause 9.3.10.3.3 based on *deriveSSB-IndexFromCell-inter* apply provided that UE supports *ncsg-SymbolLevelScheduleRestrictionInter-r17*. If UE does not support *ncsg-SymbolLevelScheduleRestrictionInter-r17*, the requirements in clause 9.3.10.3.3 apply assuming *deriveSSB-IndexFromCell-inter* is not enabled.

9.3.10.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When the UE performs inter-frequency measurements with NCSG in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement when (1) *simultaneousRxTxInterBandCA* is not supported for the target measurement band and the serving cell's band, or (2) target measurement and the serving cell are on the same band or on the band with overlapping DL frequency with UE's serving cell(s).

The UE is not expected to transmit PUCCH/PUSCH/SRS on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO *i*, and Δt serving cell symbol before each consecutive SSB symbols to be measured and Δt serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO *i*. Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9.
- serving cell symbols fully or partially overlap with SMTC window for MO *i* and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO *i*,

When the UE performs inter-frequency measurements with NCSG in a TDD band, the following restrictions apply due to SS-RSRQ measurement when *simultaneousRxTxInterBandCA* is not supported for the target measurement band and the serving cell band

The UE is not expected to transmit PUCCH/PUSCH/SRS on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO *i* include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO i , and Δt serving cell symbol before each consecutive SSB symbols to be measured and RSSI measurement symbols, and Δt serving cell symbol after each consecutive SSB symbols to be measured and RSSI measurement symbols within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO i . Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9.
- serving cell symbols fully or partially overlap with SMTC window for MO i and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO i .

If the high layer in TS 38.331 [2] signalling of *smtc2* is configured, the SMTC periodicity follows *smtc2*; Otherwise SMTC periodicity follows *smtc1*.

9.3.10.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement when the target inter-frequency layer to be measured is on the same band with UE's serving cell(s) or on the band with overlapping DL frequency with UE's serving cell(s).

- The UE is not expected to receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO i include
- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO i , and Δt serving cell symbol before each consecutive SSB symbols to be measured and Δt serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO i . Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9.
- serving cell symbols fully or partially overlap with SMTC window for MO i and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO i ,

If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

9.3.10.3.3 Scheduling availability of UE performing measurements on FR2

When (1) UE does not support IBM between target measurement band and serving cell's band(s) nor *simultaneousRxTxInterBandCA*, or (2) target measurement and a serving cell are on the same band, the following scheduling restriction applies to the serving cell due to SS-RSRP or SS-SINR measurement on an FR2 inter-frequency cell with NCSG:

The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO i include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO i , and Δt serving cell symbol before each consecutive SSB symbols to be measured and Δt serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO i . Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.8.
- serving cell symbols fully or partially overlap with SMTC window for MO i and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO i ,

and due to SS-RSRQ measurement on an FR2 inter-frequency cell with NCSG

The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO i include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO i , and Δt serving cell symbol before each consecutive SSB symbols to be measured and RSSI measurement symbols, and Δt serving cell symbol after each consecutive SSB symbols to be measured and RSSI measurement symbols within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO i . Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.8.
- serving cell symbols fully or partially overlap with SMTC window for MO i and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO i .

When UE does not support IBM between target measurement band and serving cell's band(s) but supports *simultaneousRxTxInterBandCA*, the following scheduling restriction applies to the serving cell due to SS-RSRP or SS-SINR measurement on an FR2 inter-frequency cell with NCSG

The UE is not expected to receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO i include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO i , and Δt serving cell symbol before each consecutive SSB symbols to be measured and Δt serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO i . Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9.
- serving cell symbols fully or partially overlap with SMTC window for MO i and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO i ,

and due to SS-RSRQ measurement on an FR2 inter-frequency cell with NCSG

The UE is not expected to receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO i include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO i , and Δt serving cell symbol before each consecutive SSB symbols to be measured and RSSI measurement symbols, and Δt serving cell symbol after each consecutive SSB symbols to be measured and RSSI measurement symbols within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO i . Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.8.
- serving cell symbols fully or partially overlap with SMTC window for MO i and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO i .

When UE supports IBM between target measurement band and serving cell's band(s) but not *simultaneousRxTxInterBandCA*, the following scheduling restriction applies to the serving cell due to SS-RSRP or SS-SINR measurement on an FR2 inter-frequency cell with NCSG

The UE is not expected to transmit PUCCH/PUSCH/SRS on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO i include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO i , and Δt serving cell symbol before each consecutive SSB symbols to be measured and Δt serving cell symbol after each consecutive SSB symbols to be measured within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO i . Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9..
- serving cell symbols fully or partially overlap with SMTC window for MO i and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO i ,

and due to SS-RSRQ measurement on an FR2 inter-frequency cell with NCSG

The UE is not expected to transmit PUCCH/PUSCH/SRS on the union of restricted serving cell symbols due to measurement of all MOs, where the restricted serving cell symbols due to measurement of MO i include

- serving cell symbols fully or partially overlap with SSB symbols to be measured on MO i , and Δt serving cell symbol before each consecutive SSB symbols to be measured and RSSI measurement symbols, and Δt serving cell symbol after each consecutive SSB symbols to be measured and RSSI measurement symbols within SMTC window duration, if *deriveSSB-IndexFromCellInter-r17* is enabled for MO i . Δt is defined as the minimum integer number of symbols with total duration no smaller than the tolerance specified in clause 7.9.
- serving cell symbols fully or partially overlap with SMTC window for MO i and on 1 serving cell symbol before and after the SMTC window, if *deriveSSB-IndexFromCellInter-r17* is not enabled for MO i .

If the high layer signalling of *smtc2* is configured in TS 38.331 [2], the SMTC periodicity follows *smtc2*; Otherwise the SMTC periodicity follows *smtc1*.

When UE supports IBM between target measurement band and serving cell's band(s) and *simultaneousRxTxInterBandCA*, no scheduling restriction applies to the serving cell.

If following conditions are met:

- The UE has been notified about system information update through paging,
- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, the UE shall receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, the UE shall receive PDSCH that corresponds to the PDCCH that the UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured.

9.3.10.3.4 Scheduling availability of UE performing measurements on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 serving cell(s) due to measurements performed on FR2 frequency layer.

There are no scheduling restrictions on FR2 serving cell(s) due to measurements performed on FR1 frequency layer.

9.3A NR inter-frequency measurements in carrier frequencies with CCA

9.3A.1 Introduction

The requirements in clause 9.3A apply for inter-frequency measurements on a carrier frequency with CCA. A measurement is defined as an SSB based inter-frequency measurement provided it is not defined as an intra-frequency measurement according to clause 9.2A. The UE shall be able to identify new inter-frequency cells in carrier frequencies with CCA and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified inter-frequency cells if carrier frequency information is provided by PCell or PSCell, even if no explicit neighbour list with physical layer cell identities is provided.

When the inter-frequency measurement is performed on a neighbour cell in FR2-2 with shared spectrum channel access, UE shall determine the CCA mode of the neighbour cell according to *channelAccessMode2-r17* of the cell configured in *MeasObjectNR*. If *channelAccessMode2-r17* of the cell is enabled, UE shall assume that CCA applies to the cell and perform measurement accordingly, and the requirements in clause 9.3A shall apply; otherwise, UE shall assume that CCA does not apply to the cell and perform measurement accordingly, and requirements in 9.3 shall apply.

SSB based measurements are configured along with a measurement timing configuration (SMTC) per carrier, which provides periodicity, duration and offset information on a window of up to 5ms where the measurements on the configured inter-frequency carrier are to be performed. For inter-frequency connected mode measurements, one measurement window periodicity may be configured per inter-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB on an inter-frequency measurement object which start earlier than the gap starting time + switching time, nor detect SSB which end later than the gap end – switching time.

In the requirements of clause 9.3A, the term SMTC occasion not available at the UE refers to when the SMTC contains SSBs configured by gNB in a cell on a carrier frequency subject to CCA, but N candidate SSB positions for the same SS/PBCH block index within the discovery burst transmission window are not available at the UE due to DL CCA failures at gNB during the corresponding evaluation or measurement period, where:

- For the cell detection procedure: N is at least one candidate SSB position (NOTE: the one candidate SSB position for the cell detection shall not be impacted by the set of candidate SSB positions which are already being measured by the UE within the current measurement period of the on-going measurements), and
- For other procedures in clause 9.3A: N are the first two successive candidate SSB positions when two or more candidate SSB positions are configured for this SSB index in one discovery burst transmission window, otherwise N is one candidate SSB position;

otherwise the SMTC occasion is considered as available at the UE.

For the FR2-2 requirements of clause 9.3A, an SMTC occasion group consists of N consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.

9.3A.2 Requirements applicability

The requirements in clause 9.3A apply, provided:

- The cell being identified or measured is detectable.

An inter-frequency CCA cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clause 10.1.28,
- SS-RSRQ related side conditions given in clause 10.1.30 and TBD for FR1 and FR2-2, respectively,
- SS-SINR related side conditions given in clause 10.1.32 and TBD for FR1 and FR2-2, respectively,
- SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.9.

9.3A.3 Number of cells and number of SSB

9.3A.3.1 Requirements for FR1

For each inter-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 4 identified cells, and
- 7 SSBs with different SSB indexes and/or PCI on the inter-frequency layer.

9.3A.3.2 Requirements for FR2-2

For each inter-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 4 identified cells, and
- 10 SSBs with different SSB index and/or PCI on the inter-frequency layer, and

- 1 SSB per identified cell.

9.3A.4 Inter-frequency cell identification

When measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable inter-frequency cell within $T_{\text{identify_inter_cca_without_index}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter-frequency cell, in carrier frequencies with CCA, within $T_{\text{identify_inter_cca_with_index}}$. The UE shall be able to identify a new detectable inter-frequency SS block, in carrier frequencies with CCA, of an already detected cell within $T_{\text{identify_inter_cca_without_index}}$.

$$T_{\text{identify_inter_cca_without_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}}) \text{ ms}$$

$$T_{\text{identify_inter_cca_with_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}} + T_{\text{SSB_time_index_inter_cca}}) \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1 and table 9.3A.4-3.

$T_{\text{SSB_time_index_inter_cca}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2 and Table 9.3A.4-4.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

$\text{CSSF}_{\text{inter}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{within_gap},i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

$M_{\text{pss/sss_sync_inter_CCA}}$: For a UE supporting FR2-2 power class 1, $M_{\text{pss/sss_sync_inter_CCA}} = 96$. For a UE supporting FR2-2 power class 2, $M_{\text{pss/sss_sync_inter_CCA}} = 60$. For a UE supporting FR2-2 power class 3, $M_{\text{pss/sss_sync_inter_CCA}} = 60$.

$M_{\text{SSB_index_inter_CCA}}$: For a UE supporting FR2-2 power class 2 or 3, $M_{\text{SSB_index_inter_CCA}} = 48$ samples. For a UE supporting FR2 power class 1, $M_{\text{SSB_index_inter_CCA}} = 72$ samples

$M_{\text{meas_period_inter_CCA}}$: For a UE supporting FR2-2 power class 1, $M_{\text{meas_period_inter_CCA}} = 96$. For a UE supporting FR2-2 power class 2, $M_{\text{meas_period_inter_CCA}} = 60$. For a UE supporting FR2-2 power class 3, $M_{\text{meas_period_inter_CCA}} = 60$

Table 9.3A.4-1: Time period for PSS/SSS detection (FR1)

Condition ^{NOTE1,2,3,4}	$T_{\text{PSS/SSS_sync_inter_cca}}$
No DRX	$\max(600\text{ms}, (8+L_{\text{PSS/SSS,gaps}}) \times \max(\text{MGRP, SMTC period})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $\leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}((8+L_{\text{PSS/SSS,gaps}}) \times 1.5) \times \max(\text{MGRP, SMTC period, DRX cycle})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $> 320\text{ms}$	$(8+L_{\text{PSS/SSS,gaps}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: When DRX is not configured, $L_{\text{PSS/SSS,gaps}}$ is the number of SMTC occasions not available at the UE during $T_{\text{PSS/SSS_sync_inter_cca}}$, for PSS/SSS detection, where $L_{\text{PSS/SSS,gaps}} \leq L_{\text{PSS/SSS,gaps,max}}$. When DRX is configured, $L_{\text{PSS/SSS,gaps}}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{\text{PSS/SSS_sync_inter_cca}}$, for PSS/SSS detection, where $L_{\text{PSS/SSS,gaps}} \leq L_{\text{PSS/SSS,gaps,max}}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $\text{CSSF}_{\text{inter}}$.	
NOTE 4: $L_{\text{PSS/SSS,gaps,max}} = 12$ for $\max(\text{DRX cycle, SMTC period, MGRP}) \leq 40 \text{ ms}$ $L_{\text{PSS/SSS,gaps,max}} = 8$ for $40 \text{ ms} < \max(\text{DRX cycle, SMTC period, MGRP}) \leq 320 \text{ ms}$, and $L_{\text{PSS/SSS,gaps,max}} = 5$ for $\text{DRX cycle} > 320 \text{ ms}$.	

Upon exceeding $L_{\text{PSS/SSS,gaps,max}}$, the UE is not required to meet the corresponding PSS/SSS detection requirement. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

Table 9.3A.4-2: Time period for time index detection (FR1)

Condition ^{NOTE1,2,3,4}	$T_{SSB_time_index_inter_cca}$
No DRX	$\max(120\text{ms}, (3 + L_{ind,gaps}) \times \max(MGRP, \text{SMTC period})) \times CSSF_{inter}$
DRX cycle $\leq 320\text{ms}$	$\max(120\text{ms}, \text{ceil}((3 + L_{ind,gaps}) \times 1.5) \times \max(MGRP, \text{SMTC period, DRX cycle})) \times CSSF_{inter}$
DRX cycle $> 320\text{ms}$	$(3 + L_{ind,gaps}) \times \text{DRX cycle} \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: When DRX is not configured, $L_{ind,gaps}$ is the number of SMTC occasions not available at the UE during $T_{SSB_time_index_inter_cca}$ for time index identification, where $L_{ind,gaps} \leq L_{ind,gaps,max}$. When DRX is configured, $L_{ind,gaps}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{SSB_time_index_inter_cca}$ for time index identification, where $L_{ind,gaps} \leq L_{ind,gaps,max}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $CSSF_{inter}$. NOTE 4: $L_{ind,gaps,max} = 5$ for $\max(\text{DRX cycle, SMTC period, MGRP}) \leq 40\text{ ms}$, $L_{ind,gaps,max} = 3$ for $40\text{ ms} < \max(\text{DRX cycle, SMTC period, MGRP}) \leq 320\text{ ms}$, and $L_{ind,gaps,max} = 2$ for $\text{DRX cycle} > 320\text{ ms}$.	

The UE shall restart the time index detection upon exceeding $L_{ind,gaps,max}$. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

Table 9.3A.4-3: Time period for PSS/SSS detection, (Frequency range FR2-2)

Condition ^{NOTE}	T_{PSS/SSS_sync_inter}
No DRX	$\text{Max}(600\text{ms}, \text{ceil}(M_{pss/sss_sync_inter_CCA} + [N_{RxBeam}] \times L_{PSS/SSS,gaps})) \times \text{Max}(MGRP, \text{SMTC period}) \times CSSF_{inter}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(600\text{ms}, \text{ceil}(1.5 \times M_{pss/sss_sync_inter_CCA} + [N_{RxBeam}] \times L_{PSS/SSS,gaps})) \times \text{Max}(MGRP, \text{SMTC period, DRX cycle}) \times CSSF_{inter}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(M_{pss/sss_sync_inter_CCA} + [N_{RxBeam}] \times L_{PSS/SSS,gaps}) \times \text{DRX cycle} \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified NOTE 3: When DRX is not configured, $L_{PSS/SSS,gaps}$ is the number of SMTC occasion groups not available at the UE during $T_{PSS/SSS_sync_inter_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,gaps} < L_{PSS/SSS,gaps,max}$. A SMTC occasion group consists of N_{RxBeam} consecutive SMTC occasions. An SMTC occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB. When DRX is configured, $L_{PSS/SSS}$ is the number of [DRX cycle groups] in which at least one SMTC occasion is not available at the UE during $T_{PSS/SSS_sync_inter_CCA}$ for PSS/SSS detection, where $L_{PSS/SSS,gaps} < L_{PSS/SSS,gaps,max}$. [A DRX occasion group consists of N_{RxBeam} consecutive DRX cycles. A DRX occasion group occasion group is not available, when at least one SMTC occasion in the group is not transmitted by the gNB.] When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. NOTE 4: $L_{PSS/SSS,gaps} = 12$ for $\max(\text{DRX cycle, SMTC period, MGRP}) \leq 40\text{ ms}$, $L_{PSS/SSS,gaps} = 8$ for $40\text{ ms} < \max(\text{DRX cycle, SMTC period, MGRP}) \leq 320\text{ ms}$, and $L_{PSS/SSS,gaps} = 5$ for $\text{DRX cycle} > 320\text{ ms}$	

Upon exceeding $L_{PSS/SSS,gaps,max}$, the UE is not required to meet the corresponding PSS/SSS detection requirement. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

Table 9.3A.4-4: Time period for time index detection (FR2-2)

Condition ^{NOTE1,2,3,4}	$T_{SSB_time_index_inter_cca}$
No DRX	$\max(120\text{ms}, \text{ceil}(M_{SSB_index_inter_CCA} + [N_{RxBeam}] \times L_{ind,gaps}) \times \max(MGRP, \text{SMTC period})) \times CSSF_{inter}$
DRX cycle $\leq 320\text{ms}$	$\max(120\text{ms}, \text{ceil}(M_{SSB_index_inter_CCA} + [N_{RxBeam}] \times L_{ind,gaps}) \times 1.5) \times \max(MGRP, \text{SMTC period, DRX cycle}) \times CSSF_{inter}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M_{SSB_index_inter_CCA} + [N_{RxBeam}] \times L_{ind,gaps}) \times \text{DRX cycle} \times CSSF_{inter}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

NOTE 2:	When DRX is not configured, $L_{\text{ind,gaps}}$ is the number of SMTC occasions not available at the UE during $T_{\text{SSB_time_index_inter_cca}}$, for time index identification, where $L_{\text{ind,gaps}} \leq L_{\text{ind,gaps,max}}$. When DRX is configured, $L_{\text{ind,gaps}}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{\text{SSB_time_index_inter_cca}}$, for time index identification, where $L_{\text{ind,gaps}} \leq L_{\text{ind,gaps,max}}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $\text{CSSF}_{\text{inter}}$.
NOTE 3:	$L_{\text{ind,gaps,max}} = [5]$ for $\max(\text{DRX cycle, SMTC period, MGRP}) \leq 40$ ms, $L_{\text{ind,gaps,max}} = [3]$ for 40 ms $< \max(\text{DRX cycle, SMTC period, MGRP}) \leq 320$ ms, and $L_{\text{ind,gaps,max}} = [2]$ for DRX cycle > 320 ms.

The UE shall restart the time index detection upon exceeding $L_{\text{ind,gaps,max}}$. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

9.3A.5 Inter-frequency measurements

When measurement gaps are provided for inter-frequency measurements in carrier frequencies with CCA, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1.28, 10.1.30, 10.1.32, respectively, as shown in table 9.3A.5-1:

Table 9.3A.5-1: Measurement period for inter-frequency measurements with gaps

Condition ^{NOTE1,2,3,4}	$T_{\text{SSB_measurement_period_inter_cca}}$
No DRX	$\max(200\text{ms}, (8 + L_{\text{meas}}) \times \max(\text{MGRP, SMTC period})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $\leq 320\text{ms}$	$\max(200\text{ms}, \text{ceil}((8 + L_{\text{meas}}) \times 1.5) \times \max(\text{MGRP, SMTC period, DRX cycle})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $> 320\text{ms}$	$(8 + L_{\text{meas}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: When DRX is not configured, L_{meas} is the number of SMTC occasions not available at the UE during $T_{\text{SSB_measurement_period_NR_cca}}$, for inter-frequency measurements with gaps, where $L_{\text{meas}} \leq L_{\text{meas,max}}$. When DRX is configured, L_{meas} is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{\text{SSB_measurement_period_NR_cca}}$, for inter-frequency measurements with gaps, where $L_{\text{meas}} \leq L_{\text{meas,max}}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $\text{CSSF}_{\text{inter}}$.	
NOTE 4: $L_{\text{meas,max}} = 12$ for $\max(\text{DRX cycle, SMTC period, MGRP}) \leq 40$ ms, $L_{\text{meas,max}} = 8$ for 40 ms $< \max(\text{DRX cycle, SMTC period, MGRP}) \leq 320$ ms, and $L_{\text{meas,max}} = 5$ for DRX cycle > 320 ms.	

The UE shall restart the measurement upon exceeding $L_{\text{meas,max}}$. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

The UE shall stop the measurement attempts on the SSB of a cell and perform the detection procedure again, like for any other SSB, when the following conditions are met:

- $L_{\text{meas}} > L_{\text{meas,max}}$, and
- The time period of unsuccessful measurement attempts exceeds the maximum time required for the cell to remain known as defined in clause 9.3A.6.3.

Table 9.3A.5-2: Measurement period for inter-frequency measurements with gaps(FR2-2)

Condition ^{NOTE1,2,3,4}	$T_{\text{SSB_measurement_period_inter_cca}}$
----------------------------------	---

No DRX	$\max(200\text{ms}, \text{ceil}(M_{\text{meas_period_inter_CCA}} + [N_{\text{RxBeam}}] \times L_{\text{meas,gaps}}) \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $\leq 320\text{ms}$	$\max(200\text{ms}, \text{ceil}(M_{\text{meas_period_inter_CCA}} + [N_{\text{RxBeam}}] \times L_{\text{meas,gaps}}) \times 1.5) \times \max(\text{MGRP}, \text{SMTC period, DRX cycle}) \times \text{CSSF}_{\text{inter}}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M_{\text{meas_period_inter_CCA}} + [N_{\text{RxBeam}}] \times L_{\text{meas,gaps}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1 NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group. NOTE 3: When DRX is not configured, $L_{\text{meas,gaps}}$ is the number of SMTC occasions not available at the UE during $T_{\text{SSB_measurement_period_inter_cca}}$, for inter-frequency measurements with gaps, where $L_{\text{meas,gaps}} \leq L_{\text{meas,gaps,max}}$. When DRX is configured, $L_{\text{meas,gaps}}$ is the number of DRX cycles in which at least one SMTC occasion is not available at the UE during $T_{\text{SSB_measurement_period_NR_cca}}$, for inter-frequency measurements with gaps, where $L_{\text{meas,gaps}} \leq L_{\text{meas,gaps,max}}$. When configured with DRX, the UE is not required to determine the availability of SMTC occasions more frequent than once per DRX cycle. When configured with measurement gaps, the UE is not required to determine the availability of SMTC occasions more frequent than once during MGRP. FFS: The UE is not required to determine the availability of SMTC occasions more frequent than what is required by $\text{CSSF}_{\text{inter}}$. NOTE 4: $L_{\text{meas,gaps,max}} = [12]$ for $\max(\text{DRX cycle}, \text{SMTC period}, \text{MGRP}) \leq 40 \text{ ms}$, $L_{\text{meas,gaps,max}} = [8]$ for $40 \text{ ms} < \max(\text{DRX cycle}, \text{SMTC period}, \text{MGRP}) \leq 320 \text{ ms}$, and $L_{\text{meas,gaps,max}} = [5]$ for $\text{DRX cycle} > 320 \text{ ms}$.	

The UE shall restart the measurement upon exceeding $L_{\text{meas,gap,max}}$. The requirements apply provided that any two closest SMTC occasions available at the UE for the measurement shall be separated by no more than the maximum time requirement for the cell to remain known.

9.3A.6 NR Inter-frequency measurements reporting requirements

9.3A.6.1 Periodic Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.28, 10.1.30, and 10.1.32, respectively.

9.3A.6.2 Event-triggered Periodic Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered periodic measurement reports shall meet the requirements in clauses 10.1.28, 10.1.30, and 10.1.32, respectively.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.3A.6.3.

9.3A.6.3 Event-triggered Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.28, 10.1.30, and 10.1.32, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times T_{\text{TI}_{\text{DCCH}}}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report, and all delays due to UL CCA failures until the successful transmission of the report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within $T_{\text{identify_inter_cca_without_index}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index. Otherwise UE shall be able to identify a new detectable inter-frequency cell within $T_{\text{identify_inter_cca_with_index}}$. Both $T_{\text{identify_inter_cca_without_index}}$ and $T_{\text{identify_inter_cca_with_index}}$ are defined in clause 9.3A.4. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSB measured from the cell being configured remains detectable during the time period $T_{\text{identify_inter_cca_without_index}}$ or $T_{\text{identify_inter_cca_with_index}}$ defined in clause 9.3A.4. If a cell which has been detectable at least for the time period $T_{\text{identify_inter_cca_without_index}}$ or $T_{\text{identify_inter_cca_with_index}}$ defined in clause 9.3A.4 becomes undetectable for a period ≤ 8 seconds and then the cell becomes detectable again with the same spatial reception parameter and then triggers the measurement report as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{\text{SSB_measurement_period_inter_cca}}$ defined in clause 9.3A.5 provided the timing to that cell has not changed more than $\pm 3200/2^\mu$ Tc while measurement gap has not been available and the L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used an additional delay can be expected.

9.3A.8 Inter-frequency RSSI measurements

An RSSI measurement is defined as an inter-frequency measurement provided that the RSSI measurement bandwidth is not contained within the current carrier bandwidth of the UE.

The UE physical layer shall be capable of performing the RSSI measurements, defined in TS 38.215 [4] on one or more inter-frequency carriers operating with CCA, TS 37.213 [33], if the carrier(s) are indicated by higher layers [2], and report the RSSI measurements to higher layers. The UE physical layer shall provide to higher layers a single RSSI sample for each OFDM symbol within each configured RSSI measurement duration [2] occurring with a configured RSSI measurement timing configuration periodicity [2], *rmtc-Periodicity*. The requirements apply if *rmtc-SubframeOffset* [2] is configured.

For performing inter-frequency RSSI measurement in FR2-2,

- If a UE has serving cell in FR2-2,
 - If the TCI state is provided in RMTC configuration of FR2-2, the UE shall assume the configured RSSI measurement resources are QCL-ed with TypeD to the DL RS associated with the TCI state provided in the RMTC configuration. The UE does not expect to be configured with an explicit TCI-state in RMTC-Config with a reference serving cell in FR1 or FR2-1. If no TCI state is provided in the RMTC configuration, the UE shall assume the configured RSSI measurement resources are QCL-ed with TypeD to one of the latest received PDSCH and the latest monitored CORESET in the active BWP of a serving carrier in FR2-2.
- If a UE has no serving cell in FR2-2,
 - The UE does not expect that a TCI state is provided in RMTC configuration. It is up to UE implementation how to determine the spatial domain filter for the inter-frequency RSSI measurement in FR2-2, and no requirements are defined.

For RSSI measurement in FR2-2 with SCS of 480 kHz or 960 kHz, the RSSI measurement results shall be derived based on symbols configured by RMTC except for the first symbol and the last symbol in RMTC, and there is no requirements when *measDurationSymbols* is configured as 1.

Table 9.3A.8-1: Measurement period for inter-frequency RSSI measurements with gaps

Condition ^{NOTE1,2,3,4}	$T_{\text{RSSI_measurement_period_inter_cca}}$
No DRX	$\max(\text{reportInterval}, \max(\text{rmtc-Periodicity}, \text{MGRP}) \times \text{CSSF}_{\text{inter}})$
DRX	$\max(\text{reportInterval}, \max(\text{rmtc-Periodicity}, \text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{inter}})$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: $\text{CSSF}_{\text{inter}}$ is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{within_gap},i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.	

If the UE requires measurement gaps to perform inter-frequency measurements, a single measurement gap pattern is used for all concurrent inter-frequency measurements, including inter-frequency RSSI measurements. The RSSI measurement duration and the measurement gap shall be aligned, and the following additional condition shall be fulfilled:

- Entire RSSI measurement duration is contained in the measurement gap.

The RSSI measurement performed and reported according to this clause shall meet the RSSI measurement accuracy requirement in Clause 10.1.34.2. The reported RSSI measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in Clause 10.1.34.3.

9.3A.9 Inter-frequency channel occupancy measurements

The UE shall be capable of estimating the channel occupancy on one or more carrier frequencies indicated by higher layers [2], based on RSSI samples provided by the physical layer. The requirements apply if *rmtc-SubframeOffset* [2] is configured.

Table 9.3A.9-1: Measurement period for inter-frequency Channel Occupancy measurements with gaps

Condition ^{NOTE1,2,3,4}	$T_{CO_measurement_period_inter_cca}$
No DRX	$\max(reportInterval, \max(rmtc-Periodicity, MGRP) \times CSSF_{inter})$
DRX	$\max(reportInterval, \max(rmtc-Periodicity, MGRP, DRX\ cycle) \times CSSF_{inter})$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: $CSSF_{inter}$ is a carrier specific scaling factor and is determined according to $CSSF_{within_gap,i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.	

If the UE requires measurement gaps to perform inter-frequency measurements, a single measurement gap pattern is used for all concurrent inter-frequency measurements, including inter-frequency channel occupancy measurements. The RSSI measurement duration used for channel occupancy measurement and the measurement gap shall be aligned, and the following additional condition shall be fulfilled:

- Entire RSSI measurement duration is contained in the measurement gap.

The channel occupancy measurement performed and reported according to this clause shall meet the channel occupancy measurement accuracy requirements in Clause 10.1.35.2. The reported channel occupancy measurement values contained in measurement reports shall be based on the measurement reporting range specified in TS 38.331 [2].

9.3B NR inter-frequency measurements for RedCap

9.3B.1 Introduction

A measurement is defined as an SSB based inter-frequency measurement provided it is not defined as an intra-frequency measurement according to clause 9.2B.

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified inter-frequency cells if carrier frequency information is provided by PCell, even if no explicit neighbour list with physical layer cell identities is provided.

A measurement is defined as an inter-frequency SSB based measurements without measurement gaps for UE capable of *interFrequencyMeas-NoGap* provided

- the UE supports *interFrequencyMeas-NoGap-r16* [15], and
- the SSB is completely contained in the active BWP of the UE.

For inter-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in clause 9.3B.7.3.

SSB based measurements are configured along with a measurement timing configuration (SMTC) per carrier, which provides periodicity, duration and offset information on a window of up to 5ms where the measurements on the configured inter-frequency carrier are to be performed. For inter-frequency connected mode measurements, one measurement window periodicity may be configured per inter-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB on an inter-frequency measurement object which start earlier than the gap starting time + switching time, nor detect SSB which ends later than the gap end – switching time. When the serving cells are in FR2, the inter-frequency cells are in FR2 and the per-UE gap or per-FR gap is configured to the UE in SA NR, the switching time is 0.25ms. Otherwise the switching time is 0.5ms.

Longer measurement period would be expected during the period $T_{identify_CGI_RedCap}$ when the UE is requested to decode an NR/E-UTRA CGI.

9.3B.2 Requirements applicability

The requirements in clause 9.3B apply, provided:

- The cell being identified or measured is detectable.

An inter-frequency cell shall be considered detectable when for each relevant SSB:

- For 2 Rx RedCap UE:
 - SS-RSRP related side conditions given in clauses 10.1.4 and 10.1.5 for FR1 and FR2, respectively, for a corresponding Band,
 - SS-RSRQ related side conditions given in clauses 10.1.9 and 10.1.10 for FR1 and FR2, respectively, for a corresponding Band,
 - SS-SINR related side conditions given in clauses 10.1.14 and 10.1.15 for FR1 and FR2, respectively, for a corresponding Band,
 - SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.3 for a corresponding Band.
- For 1 Rx RedCap UE:
 - SS-RSRP related side conditions given in clauses 10.1A.4 for FR1 for a corresponding Band,
 - SS-RSRQ related side conditions given in clauses 10.1A.4 for FR1 for a corresponding Band,
 - SS-SINR related side conditions given in clauses 10.1A.4 for FR1, respectively, for a corresponding Band,
 - SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.16 for a corresponding Band.

9.3B.3 Number of cells and number of SSB

9.3B.3.1 Requirements for FR1

For each inter-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 4 identified cells, and
- 7 SSBs with different SSB index and/or PCI on the inter-frequency layer.

9.3B.3.2 Requirements for FR2

For each inter-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 4 identified cells, and
- 10 SSBs with different SSB index and/or PCI on the inter-frequency layer, and
- 1 SSB per identified cell.

9.3B.4 Inter-frequency measurement with measurement gaps

When measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_without_index_RedCap}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_with_index_RedCap}}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{\text{identify_inter_without_index_RedCap}}$.

$$T_{\text{identify_inter_without_index_RedCap}} = (T_{\text{PSS/SSS_sync_inter_RedCap}} + T_{\text{SSB_measurement_period_inter_RedCap}}) \text{ ms}$$

$$T_{\text{identify_inter_with_index_RedCap}} = (T_{\text{PSS/SSS_sync_inter_RedCap}} + T_{\text{SSB_measurement_period_inter_RedCap}} + T_{\text{SSB_time_index_inter_RedCap}}) \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_inter_RedCap}}$: it is the time period used in PSS/SSS detection given in table 9.3B.4-1, table 9.3B.4-2, table 9.3B.4-3.

$T_{\text{SSB_time_index_inter_RedCap}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3B.4-4, table 9.3B.4-5, table 9.3B.4-6.

$T_{\text{SSB_measurement_period_inter_RedCap}}$: equal to a measurement period of SSB based measurement given in table 9.3B.5-1, table 9.3B.5-2, table 9.3B.5-3.

For 2 Rx RedCap UE:

$M_{\text{pss/sss_sync_inter_RedCap}}$: For a UE supporting FR2 power class 1 or 5, $M_{\text{pss/sss_sync_inter_RedCap}} = 64$ samples. For a UE supporting FR2 power class 2, 3, 4 or 7, $M_{\text{pss/sss_sync_inter_RedCap}} = 40$ samples.

$M_{\text{SSB_index_inter_RedCap}}$: For a UE supporting FR2 power class 1 or 5, $M_{\text{SSB_index_inter_RedCap}} = 40$ samples. For a UE supporting FR2 power class 2, 3, 4 or 7, $M_{\text{SSB_index_inter_RedCap}} = 24$ samples.

$M_{\text{meas_period_inter_RedCap}}$: For a UE supporting FR2 power class 1 or 5, $M_{\text{meas_period_inter_RedCap}} = 64$ samples. For a UE supporting FR2 power class 2, 3, 4 or 7, $M_{\text{meas_period_inter_RedCap}} = 40$ samples.

$\text{CSSF}_{\text{inter_RedCap}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{within_gap_RedCap},i}$ in clause 9.1A.5.2 for measurement conducted within measurement gaps.

Table 9.3B.4-1: Time period for PSS/SSS detection (Frequency range FR1) for 2Rx RedCap UE

Condition ^{NOTE1}	$T_{\text{PSS/SSS_sync_inter_RedCap}}$
No DRX	$\text{Max}(600\text{ms}, 8 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{inter_RedCap}}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(600\text{ms}, \text{Ceil}(8 \times 1.5) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter_RedCap}}$
DRX cycle $> 320\text{ms}$	$8 \times \text{DRX cycle} \times \text{CSSF}_{\text{inter_RedCap}}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 9.3B.4-2: Time period for PSS/SSS detection, (Frequency range FR2) for 2Rx RedCap UE

Condition ^{NOTE1}	$T_{\text{PSS/SSS_sync_inter_RedCap}}$
No DRX	$\text{Max}(600\text{ms}, M_{\text{pss/sss_sync_inter_RedCap}} \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{inter_RedCap}}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(600\text{ms}, (1.5 \times M_{\text{pss/sss_sync_inter_RedCap}}) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter_RedCap}}$
DRX cycle $> 320\text{ms}$	$M_{\text{pss/sss_sync_inter_RedCap}} \times \text{DRX cycle} \times \text{CSSF}_{\text{inter_RedCap}}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 9.3B.4-3: Time period for PSS/SSS detection (Frequency range FR1) for 1Rx RedCap UE

Condition ^{NOTE1}	$T_{\text{PSS/SSS_sync_inter_RedCap}}$
No DRX	$\text{Max}(600\text{ms}, 10 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{inter_RedCap}}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(600\text{ms}, \text{Ceil}(10 \times 1.5) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter_RedCap}}$
DRX cycle $> 320\text{ms}$	$10 \times \text{DRX cycle} \times \text{CSSF}_{\text{inter_RedCap}}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 9.3B.4-4: Time period for time index detection (Frequency range FR1) for 2Rx RedCap UE

Condition ^{NOTE1}	$T_{\text{SSB_time_index_inter_RedCap}}$
No DRX	$\text{Max}(120\text{ms}, 3 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{inter_RedCap}}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(120\text{ms}, \text{Ceil}(3 \times 1.5) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter_RedCap}}$
DRX cycle $> 320\text{ms}$	$3 \times \text{DRX cycle} \times \text{CSSF}_{\text{inter_RedCap}}$

NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1

Table 9.3B.4-5: Time period for time index detection (Frequency range FR2) for 2Rx RedCap UE

Condition ^{NOTE1}	$T_{SSB_time_index_inter_RedCap}$
No DRX	$\text{Max}(200\text{ms}, M_{SSB_index_inter_RedCap} \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{inter_RedCap}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(200\text{ms}, (1.5 \times M_{SSB_index_inter_RedCap}) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{inter_RedCap}$
DRX cycle $> 320\text{ms}$	$M_{SSB_index_inter_RedCap} \times \text{DRX cycle} \times \text{CSSF}_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 9.3B.4-6: Time period for time index detection (Frequency range FR1) for 1Rx RedCap UE

Condition ^{NOTE1}	$T_{SSB_time_index_inter_RedCap}$
No DRX	$\text{Max}(160\text{ms}, 6 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{inter_RedCap}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(160\text{ms}, \text{Ceil}(6 \times 1.5) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{inter_RedCap}$
DRX cycle $> 320\text{ms}$	$6 \times \text{DRX cycle} \times \text{CSSF}_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

9.3B.5 Inter-frequency measurements

When measurement gaps are provided for inter frequency measurements, the RedCap UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1A.4, 10.1A.5, 10.1A.8, 10.1A.9, 10.1A.12 and 10.1A.13, respectively, as shown in table 9.3B.5-1 and 9.3B.5-2 for 2Rx RedCap and 9.3B.5-3 for 1Rx RedCap, respectively.

Table 9.3B.5-1: Measurement period for inter-frequency measurements with gaps (Frequency FR1) for 2Rx RedCap UE

Condition ^{NOTE1}	$T_{SSB_measurement_period_inter_RedCap}$
No DRX	$\text{Max}(200\text{ms}, 8 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{inter_RedCap}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(200\text{ms}, \text{Ceil}(8 \times 1.5) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{inter_RedCap}$
DRX cycle $> 320\text{ms}$	$8 \times \text{DRX cycle} \times \text{CSSF}_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 9.3B.5-2: Measurement period for inter-frequency measurements with gaps (Frequency FR2) for 2Rx RedCap UE

Condition ^{NOTE1}	$T_{SSB_measurement_period_inter_RedCap}$
No DRX	$\text{Max}(400\text{ms}, M_{meas_period_inter_RedCap} \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{inter_RedCap}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(400\text{ms}, (1.5 \times M_{meas_period_inter_RedCap}) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{inter_RedCap}$
DRX cycle $> 320\text{ms}$	$M_{meas_period_inter_RedCap} \times \text{DRX cycle} \times \text{CSSF}_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

Table 9.3B.5-3: Measurement period for inter-frequency measurements with gaps (Frequency FR1) for 1Rx RedCap UE

Condition ^{NOTE1}	$T_{SSB_measurement_period_inter_RedCap}$
No DRX	$\text{Max}(400\text{ms}, 8 \times \text{Max}(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{inter_RedCap}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(400\text{ms}, \text{ceil}(1.5 \times 8) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{inter_RedCap}$
DRX cycle $> 320\text{ms}$	$8 \times \text{DRX cycle} \times \text{CSSF}_{inter_RedCap}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	

9.3B.6 Inter-frequency measurements reporting requirements

9.3B.6.1 Periodic Reporting

For 2 Rx RedCap UE: The requirements in clause 9.3.6.1 shall apply.

For 1 Rx RedCap UE: Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1A.4.1, 10.1A.8.1 and 10.1A.12.1, respectively.

9.3B.6.2 Event-triggered Periodic Reporting

For 2 Rx RedCap UE: Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered periodic measurement reports shall meet the requirements in clauses 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

For 1 Rx RedCap UE: Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered periodic measurement reports shall meet the requirements in clauses 10.1A.4.1, 10.1A.8.1 and 10.1A.12.1, respectively.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.3B.6.3.

9.3B.6.3 Event-triggered Reporting

For 2 Rx RedCap UE: Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.4.1, 10.1.5.1, 10.1.9.1, 10.1.10.1, 10.1.14.1 and 10.1.15.1, respectively.

For 1 Rx RedCap UE: Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1A.4.1, 10.1A.8.1 and 10.1A.12.1, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within $T_{\text{identify_inter_without_index_RedCap}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_with_index_RedCap}}$. Both $T_{\text{identify_inter_without_index_RedCap}}$ and $T_{\text{identify_inter_with_index_RedCap}}$ are defined in clause 9.3B.4. When L3 filtering is used an additional delay can be expected.

A cell is detectable only if at least one SSBs measured from the Cell being configured remains detectable during the time period $T_{\text{identify_inter_without_index_RedCap}}$ or $T_{\text{identify_inter_with_index_RedCap}}$ as defined in clause 9.3B.4 or 9.3B.7.1. If a cell which has been detectable at least for the time period $T_{\text{identify_inter_without_index_RedCap}}$ or $T_{\text{identify_inter_with_index_RedCap}}$ defined in clause 9.3B.4 or 9.3B.7.1 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{\text{SSB_measurement_period_intra_RedCap}}$ provided the timing to that cell has not changed more than $\pm 3200/2^\mu T_c$ while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

9.3B.7 Inter frequency measurements without measurement gaps

9.3B.7.1 Inter frequency Cell identification

If UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network, UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_without_index_RedCap}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRSIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_with_index_RedCap}}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{\text{identify_inter_without_index_RedCap}}$. It is assumed that when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1 and FR2, the following conditions are met:

- SFN and frame boundary across serving cell and inter-frequency neighbor cells is aligned, and
- the timing of SSBs across serving cell and inter-frequency neighbor cells are aligned

$$T_{\text{identify_inter_without_index_RedCap}} = (T_{\text{PSS/SSS_sync_inter_RedCap}} + T_{\text{SSB_measurement_period_inter_RedCap}}) \text{ ms}$$

$$T_{\text{identify_inter_with_index_RedCap}} = (T_{\text{PSS/SSS_sync_inter_RedCap}} + T_{\text{SSB_measurement_period_inter_RedCap}} + T_{\text{SSB_time_index_inter_RedCap}}) \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_inter_RedCap}}$: it is the time period used in PSS/SSS detection given in table 9.3B.7.1-1, table 9.3B.7.1-2 and table 9.3B.7.1-3.

$T_{\text{SSB_time_index_inter_RedCap}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3B.7.1-4 and table 9.3B.7.1-5.

$T_{\text{SSB_measurement_period_inter_RedCap}}$: equal to a measurement period of SSB based measurement given in table 9.3B.7.2-1, table 9.3B.7.2-2 and table 9.3B.7.2-3.

$\text{CSSF}_{\text{inter_RedCap}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{outside_gap_RedCap},i}$ in clause 9.1A.5.1 for measurement conducted outside measurement gaps, i.e. when interfrequency SMTC is fully non overlapping or partially overlapping with measurement gaps or according to $\text{CSSF}_{\text{within_gap_RedCap},i}$ in clause 9.1A.5.2 for measurement conducted within measurement gaps, i.e. when interfrequency SMTC is fully overlapping with measurement gaps.

$M_{\text{pss/sss_sync_inter_RedCap}}$: For a UE supporting FR2 power class 1 or 5, $M_{\text{pss/sss_sync_inter_RedCap}} = 40$ samples. For a UE supporting FR2 power class 2, 3, 4 or 7, $M_{\text{pss/sss_sync_inter_RedCap}} = 24$ samples.

$M_{\text{SSB_index_inter_RedCap}}$: For a UE supporting FR2 power class 1 or 5, $M_{\text{SSB_index_inter_RedCap}} = 40$ samples. For a UE supporting FR2 power class 2, 3, 4 or 7, $M_{\text{SSB_index_inter_RedCap}} = 24$ samples.

$M_{\text{meas_period_inter_RedCap}}$: For a UE supporting FR2 power class 1 or 5, $M_{\text{meas_period_inter_RedCap}} = 40$ samples. For a UE supporting FR2 power class 2, 3, 4 or 7, $M_{\text{meas_period_inter_RedCap}} = 24$ samples.

When inter-frequency SMTC is fully non overlapping with measurement gaps or inter-frequency SMTC is fully overlapping with MGs, $K_p = 1$.

When inter-frequency SMTC is partially overlapping with measurement gaps, $K_p = 1/(1 - (\text{SMTC period} / \text{MGRP}))$, where SMTC period < MGRP.

For FR2,

$$K_{\text{layer1_measurement}} = 1,$$

- if all of the reference signals configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap are not fully overlapped by inter-frequency SMTC occasions, or
- if all of the reference signal configured for RLM, BFD, CBD or L1-RSRP for beam reporting on any FR2 serving frequency in the same band outside measurement gap and fully-overlapped by inter-frequency SMTC occasions are not overlapped with any of the SSB symbols and the RSSI symbols, and 1 symbol before each consecutive SSB symbols and the RSSI symbols, and 1 symbol after each consecutive SSB symbols and the RSSI symbols, given that *SSB-ToMeasure* and *SS-RSSI-Measurement* are configured,

where SSB symbols are indicated by *SSB-ToMeasure* and RSSI symbols are indicated by *SS-RSSI-Measurement*;

$K_{\text{layer1_measurement}}=1.5$, otherwise.

If the above-mentioned reference signal configured for L1-RSRP measurement is aperiodic CSI-RS resource, longer cell identification delay would be expected.

Table 9.3B.7.1-1: Time period for PSS/SSS detection (FR1) for 2Rx RedCap UE

DRX cycle	$T_{\text{PSS/SSS_sync_inter_RedCap}}$
No DRX	$\max(600\text{ms}, \text{ceil}(5 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{inter_RedCap}}$
$\text{DRX cycle} \leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(1.5 \times 5 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter_RedCap}}$
$\text{DRX cycle} > 320\text{ms}$	$\text{ceil}(5 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter_RedCap}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.3B.7.1-2: Time period for PSS/SSS detection (FR2) for 2Rx RedCap UE

DRX cycle	$T_{\text{PSS/SSS_sync_inter_RedCap}}$
No DRX	$\max(600\text{ms}, \text{ceil}(M_{\text{pss/sss_sync_inter_RedCap}} \times K_p \times K_{\text{layer1_measurement}}) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{inter_RedCap}}$
$\text{DRX cycle} \leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(1.5 \times M_{\text{pss/sss_sync_inter_RedCap}} \times K_p \times K_{\text{layer1_measurement}}) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter_RedCap}}$
$\text{DRX cycle} > 320\text{ms}$	$\text{ceil}(M_{\text{pss/sss_sync_inter_RedCap}} \times K_p \times K_{\text{layer1_measurement}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter_RedCap}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.3B.7.1-3: Time period for PSS/SSS detection (FR1) for 1Rx RedCap UE

DRX cycle	$T_{\text{PSS/SSS_sync_inter_RedCap}}$
No DRX	$\max(600\text{ms}, \text{ceil}(7 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{inter_RedCap}}$
$\text{DRX cycle} \leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(1.5 \times 7 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter_RedCap}}$
$\text{DRX cycle} > 320\text{ms}$	$\text{ceil}(7 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter_RedCap}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.3B.7.1-4: Time period for time index detection (FR1) for 2Rx RedCap UE

DRX cycle	$T_{\text{SSB_time_index_inter_RedCap}}$
No DRX	$\max(120\text{ms}, \text{ceil}(3 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{inter_RedCap}}$
$\text{DRX cycle} \leq 320\text{ms}$	$\max(120\text{ms}, \text{ceil}(1.5 \times 3 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter_RedCap}}$
$\text{DRX cycle} > 320\text{ms}$	$\text{Ceil}(3 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter_RedCap}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.3B.7.1-5: Time period for time index detection (FR1) for 1Rx RedCap UE

DRX cycle	$T_{\text{SSB_time_index_inter_RedCap}}$
No DRX	$\max(160\text{ms}, \text{ceil}(6 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{inter_RedCap}}$

DRX cycle ≤ 320ms	$\max(160\text{ms}, \text{ceil}(1.5 \times 6 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter_RedCap}}$
DRX cycle > 320ms	$\text{Ceil}(6 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter_RedCap}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

9.3B.7.2 Measurement period

The RedCap UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1A.4, 10.1A.5, 10.1A.8, 10.1A.9, 10.1A.12 and 10.1A.13, respectively, as shown in table 9.3B.7.2-1 and 9.3B.7.2-2 for 2Rx RedCap and table 9.3B.7.2-3 for 1Rx RedCap respectively, if UE supports inter-frequency measurement without measurement gaps:

Table 9.3B.7.2-1: Measurement period for inter-frequency measurements without gaps ((FR1) for 2Rx RedCap UE

DRX cycle	$T_{\text{SSB_measurement_period_inter}}$
No DRX	$\max(200\text{ms}, \text{ceil}(5 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{inter_RedCap}}$
DRX cycle ≤ 320ms	$\max(200\text{ms}, \text{ceil}(1.5 \times 5 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter_RedCap}}$
DRX cycle > 320ms	$\text{ceil}(5 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter_RedCap}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.3B.7.2-2: Measurement period for inter-frequency measurements without gaps (FR2) for 2Rx RedCap UE

DRX cycle	$T_{\text{SSB_measurement_period_inter_RedCap}}$
No DRX	$\max(400\text{ms}, \text{ceil}(\text{M}_{\text{meas_period_inter_RedCap}} \times K_p \times K_{\text{layer1_measurement}}) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{inter_RedCap}}$
DRX cycle ≤ 320ms	$\max(400\text{ms}, \text{ceil}(1.5 \times \text{M}_{\text{meas_period_inter_RedCap}} \times K_p \times K_{\text{layer1_measurement}}) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter_RedCap}}$
DRX cycle > 320ms	$\text{ceil}(\text{M}_{\text{meas_period_inter_RedCap}} \times K_p \times K_{\text{layer1_measurement}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter_RedCap}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 9.3B.7.2-3: Measurement period for inter-frequency measurements without gaps ((FR1) for 1Rx RedCap UE

DRX cycle	$T_{\text{SSB_measurement_period_inter}}$
No DRX	$\max(200\text{ms}, \text{ceil}(5 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{inter_RedCap}}$
DRX cycle ≤ 320ms	$\max(200\text{ms}, \text{ceil}(1.5 \times 5 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter_RedCap}}$
DRX cycle > 320ms	$\text{ceil}(5 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter_RedCap}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

9.3B.7.3 Scheduling availability of UE during inter-frequency measurements

If UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network, UE is required to be capable of measuring without measurement gaps when the SSB is completely contained in the active bandwidth part of the UE. When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols to be measured in the following clauses are the SSB symbols indicated by SSB-ToMeasure [2], if it is configured; otherwise, all L SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included.

The scheduling availability requirements when UE performs inter-frequency measurements without measurement gaps in a TDD bands on FR1 and FR2 and HD-FDD bands on FR1 in clause 9.3B.7.3.1~9.3B.7.3.4 are valid under the following conditions:

- SFN and frame boundary across serving cell and inter-frequency neighbor cells is aligned, and
- the timing of SSBs across serving cell and inter-frequency neighbor cells are aligned

9.3B.7.3.1 Scheduling availability of UE performing measurements in TDD bands on FR1

When UE performs inter-frequency measurements without measurement gaps in a TDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

When UE performs inter-frequency measurements without measurement gaps in a TDD band, the following restrictions apply due to SS-RSRQ measurement

- UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

9.3B.7.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology-Inter-r16* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement

- If UE performs inter-frequency measurements without measurement gaps in a TDD band, UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.
- If UE performs inter-frequency measurements without measurement gaps in a FDD band, UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration.

9.3B.7.3.3 Scheduling availability of UE performing measurements on FR2

The following scheduling restriction applies due to SS-RSRP or SS-SINR measurement on an FR2 inter-frequency cell

The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

The following scheduling restriction applies to SS-RSRQ measurement on an FR2 inter-frequency cell

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

If following conditions are met:

- The UE has been notified about system information update through paging,
- The gap between the UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, the UE shall receive the PDCCH that the UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, the UE shall receive PDSCH that corresponds to the PDCCH that the UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured.

9.3B.7.3.4 Scheduling availability of UE performing measurements in HD-FDD bands on FR1

When UE performs inter-frequency measurements without measurement gaps in a HD-FDD band, the following restrictions apply due to SS-RSRP or SS-SINR measurement

- UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, and on 1 data symbol before each consecutive SSB symbols to be measured and 1 data symbol after each consecutive SSB symbols to be measured within SMTC window duration.

When UE performs inter-frequency measurements without measurement gaps in a HD-FDD band, the following restrictions apply due to SS-RSRQ measurement

- UE is not expected to transmit PUCCH/PUSCH/SRS on SSB symbols to be measured, RSSI measurement symbols, and on 1 data symbol before each consecutive SSB to be measured/RSSI symbols and 1 data symbol after each consecutive SSB to be measured/RSSI symbols within SMTC window duration.

9.3C NR inter-frequency measurements for SAN

9.3C.1 Introduction

A measurement is defined as an SSB based inter-frequency measurement provided it is not defined as an intra-frequency measurement according to clause 9.2. The requirements apply provided the valid parameters of ephemeris information, epoch time of the ephemeris, common TA, validity timer information, downlink polarization information for target NR SAN cell are sent to UE.

The UE shall be able to identify new inter-frequency cells and perform SS-RSRP, SS-RSRQ, and SS-SINR measurements of identified inter-frequency cells if carrier frequency information is provided by PCell, even if no explicit neighbour list with physical layer cell identities is provided.

A measurement is defined as an inter-frequency SSB based measurements without measurement gaps for UE capable of *interFrequencyMeas-NoGap* provided

- the UE supports *interFrequencyMeas-NoGap-r16* [15], and
- the SSB is completely contained in the active BWP of the UE, and
- the flag *interFrequencyConfig-NoGap-r16* is configured by the Network.

For inter-frequency SSB based measurements without measurement gaps, UE may cause scheduling restriction as specified in clause 9.3C.5.3.

SSB based measurements are configured along with up to 2 measurement timing configurations (SMTC) in parallel per carrier, which provides periodicity, duration and offset information on a window of up to 5ms where the measurements on the configured inter-frequency carrier are to be performed. For inter-frequency connected mode measurements, the measurement window periodicity may be configured per inter-frequency measurement object.

When measurement gaps are needed, the UE is not expected to detect SSB on an inter-frequency measurement object which start earlier than the gap starting time + switching time, nor detect SSB which ends later than the gap end – switching time, and the switching time is 0.5ms.

The requirements in this clause shall also apply, when the UE is configured to perform SRS carrier based switching and using measurement gaps.

The inter-frequency measurement requirements in clause 9.3C.4 and clause 9.3C.5 applies for the following scenarios:

- SSB-based inter-frequency measurement object with measurement gap.
- SSB-based inter-frequency measurement object without measurement gap when
 - all of the SMTC occasions of this inter-frequency measurement object are overlapped with the measurement gap or associated measurement gap in concurrent measurement gaps, or
 - part of the SMTC occasions of this inter-frequency measurement object are overlapped with the associated measurement gap and all the SMTC occasions of this inter-frequency measurement object are overlapped with the union of concurrent measurement gaps, or
 - part of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap or associated measurement gap in concurrent measurement gaps.

The inter-frequency measurement requirements in clause 9.3C.7 applies for the following scenarios:

- SSB-based inter-frequency measurement with no measurement gap, when none of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap or the union of concurrent measurement gaps.
- SSB-based inter-frequency measurement with no measurement gap, when part of the SMTC occasions of this inter-frequency measurement object are overlapped by the measurement gap or the union of concurrent measurement gaps.

9.3C.2 Requirements applicability

The requirements in clause 9.3C apply, provided:

- The cell being identified or measured is detectable.

An inter-frequency cell shall be considered detectable when for each relevant SSB:

- SS-RSRP related side conditions given in clauses 10.1.4C for FR1, for a corresponding Band,
- SS-RSRQ related side conditions given in clauses 10.1.9C for FR1, for a corresponding Band,
- SS-SINR related side conditions given in clauses 10.1.14C for FR1, for a corresponding Band,
- SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.18 for a corresponding Band.

9.3C.3 Number of cells and number of SSB

9.3C.3.1 Requirements for FR1

For each inter-frequency layer, during each layer 1 measurement period, the UE shall be capable of performing SS-RSRP, SS-RSRQ, and SS-SINR measurements for at least:

- 4 identified cells, and
- 7 SSBs with different SSB index and/or PCI on the inter-frequency layer.
- 4 SSBs with different SSB index and/or PCI from neighbour cells in GEO deployment.
- In NGSO deployments: cells from 2 satellites if UE does not support the capability *maxNumber-NGSO-SatellitesPerCarrier-r17*; or cells from 3 or 4 satellites depending on the value indicated in *maxNumber-NGSO-SatellitesPerCarrier-r17*.

9.3C.4 Inter-frequency measurement with measurement gaps

When measurement gaps are provided, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_without_index}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRSIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency

cell within $T_{\text{identify_inter_with_index}}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{\text{identify_inter_without_index}}$.

$$T_{\text{identify_inter_without_index}} = (T_{\text{PSS/SSS_sync_inter}} + T_{\text{SSB_measurement_period_inter}}) \text{ ms}$$

$$T_{\text{identify_inter_with_index}} = (T_{\text{PSS/SSS_sync_inter}} + T_{\text{SSB_measurement_period_inter}} + T_{\text{SSB_time_index_inter}}) \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_inter}}$: it is the time period used in PSS/SSS detection given in table 9.3C.4-1.

$T_{\text{SSB_time_index_inter}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3C.4-2.

$T_{\text{SSB_measurement_period_inter}}$: equal to a measurement period of SSB based measurement given in table 9.3C.5-1.

$\text{CSSF}_{\text{inter}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{within_gap},i}$ in clause 9.1.5.2 for measurement conducted within measurement gaps.

K_{gap} is the scaling factor for a SSB frequency layer to be measured within an associated measurement gap pattern. $K_{\text{gap}} = 1$ when the UE is not configured with concurrent measurement gaps. When the UE is configured with concurrent measurement gaps and the two measurement gaps are fully overlapping with $\text{MGRP}=160\text{ms}$, $K_{\text{gap}} = 2$. Otherwise, $K_{\text{gap}} = N_{\text{total}} / N_{\text{available}}$, where $N_{\text{available}}$ and N_{total} are calculated as follows:

For a window W of duration $\max(\text{SMTC period}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gap, and starting from the beginning of any SMTC occasion:

- N_{total} is the total number of SMTC occasions that are covered by instances of the associated measurement gap within the window W , including those overlapped with other measurement gap occasions within the window, and
- $N_{\text{available}}$ is the number of SMTC occasions that are covered by instances of the non-dropped associated measurement gap within the window W after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8C.3.

K_{gap} is only applicable for UE supporting *parallelMeasurementGap-r17*. When concurrent measurement gaps are configured, requirements in this clause do not apply if $N_{\text{available}} = 0$, or if one SMTC overlaps more than one MGs associated to the frequency layer.

$K_{\text{satellite}}$: it is a satellite specific scaling factor.

If SMTCs within a measurement gap do not overlap with each other, and if LEO and/or GEO satellite(s) is/are required to be measured within SMTC

$K_{\text{satellite}} = 1$, if GSO satellites are measured on the carrier

$K_{\text{satellite}} = \left\lceil \frac{\text{Num of LEO satellites to be measured in the SMTC}}{\text{number of LEO satellites UE is capable to measure in one SMTC}} \right\rceil$, if LEO satellites are measured on the carrier.

If SMTCs within a measurement gap partially overlap with each other, and if LEO and/or GEO satellite(s) is/are required to be measured within overlapped SMTCs

$K_{\text{satellite}} = \text{number of overlapped SMTCs}$, if only GEO satellites are measured on the carrier

$K_{\text{satellite}} = \sum_i \left\lceil \frac{\text{Num of LEO satellites to be measured in the SMTC } i}{\text{number of LEO satellites UE is capable to measure in one SMTC}} \right\rceil$, if only LEO satellites are measured on the carrier.

Table 9.3C.4-1: Time period for PSS/SSS detection (Frequency range FR1)

Condition ^{NOTE1}	$T_{\text{PSS/SSS_sync_inter}}$
No DRX	$\text{Max}(600\text{ms}, \text{Ceil}(8 \times K_{\text{gap}}) \times \text{Max}(\text{MGRP}, \text{SMTC period}^{\text{NOTE2}})) \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$

DRX cycle $\leq$ 320ms	$\text{Max}(600\text{ms}, \text{Ceil}(8 \times 1.5 \times K_{\text{gap}}) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
DRX cycle $>$ 320ms	$\text{Ceil}(8 \times K_{\text{gap}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in <i>SSB-MTC4List-r17</i> .	

Table 9.3C.4-2: Time period for time index detection (Frequency range FR1)

Condition ^{NOTE1}	$T_{\text{SSB_time_index_inter}}$
No DRX	$\text{Max}(120\text{ms}, \text{Ceil}(3 \times K_{\text{gap}}) \times \text{Max}(\text{MGRP}, \text{SMTC period}^{\text{NOTE2}})) \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
DRX cycle $\leq$ 320ms	$\text{Max}(120\text{ms}, \text{Ceil}(3 \times 1.5 \times K_{\text{gap}}) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
DRX cycle $>$ 320ms	$\text{Ceil}(3 \times K_{\text{gap}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in <i>SSB-MTC4List-r17</i> .	

9.3C.5 Inter-frequency measurements

When measurement gaps are provided for inter frequency measurements, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1.4C, 10.1.9C and 10.1.14C, respectively, as shown in table 9.3C.5-1.

Table 9.3C.5-1: Measurement period for inter-frequency measurements with gaps (Frequency FR1)

Condition ^{NOTE1}	$T_{\text{SSB_measurement_period_inter}}$
No DRX	$\text{Max}(200\text{ms}, \text{Ceil}(8 \times K_{\text{gap}}) \times \text{Max}(\text{MGRP}, \text{SMTC period}^{\text{NOTE2}})) \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
DRX cycle $\leq$ 320ms	$\text{Max}(200\text{ms}, \text{Ceil}(8 \times 1.5 \times K_{\text{gap}}) \times \text{Max}(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
DRX cycle $>$ 320ms	$\text{Ceil}(8 \times K_{\text{gap}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in <i>SSB-MTC4List-r17</i> .	

9.3C.6 Inter-frequency measurements reporting requirements

9.3C.6.1 Periodic Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.4C, 10.1.9C and 10.1.14C, respectively.

9.3C.6.2 Event-triggered Periodic Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered periodic measurement reports shall meet the requirements in clauses 10.1.4C, 10.1.9C and 10.1.14C, respectively.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.3C.6.3.

9.3C.6.3 Event-triggered Reporting

Reported SS-RSRP, SS-RSRQ, and SS-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.4C, 10.1.9C and 10.1.14C, respectively.

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times T_{\text{TTI}_{\text{DCCH}}}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within $T_{\text{identify_inter_without_index}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index. Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_with_index}}$. Both $T_{\text{identify_inter_without_index}}$ and $T_{\text{identify_inter_with_index}}$ are defined in clause 9.3C.4. When L3 filtering is used an additional delay can be expected. I

A cell is detectable only if at least one SSB measured from the Cell being configured remains detectable during the time period $T_{\text{identify_intra_without_index}}$ or $T_{\text{identify_intra_with_index}}$ as defined in clause 9.2C.5.1 or clause 9.2C.6.2. If a cell which has been detectable at least for the time period $T_{\text{identify_intra_without_index}}$ or $T_{\text{identify_intra_with_index}}$ defined in clause 9.2C.5.1 or clause 9.2C.6.2 becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again with the same spatial reception parameter and triggers an event, the event triggered measurement reporting delay shall be less than $T_{\text{SSB_measurement_period_intra}}$ provided the timing to that cell has not changed more than $\pm 3200/2^\mu T_c$ while the measurement gap has not been available and L3 filtering has not been used, where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3]. When L3 filtering is used, an additional delay can be expected.

9.3C.7 Inter frequency measurements without measurement gaps

9.3C.7.1 Inter frequency Cell identification

If UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network, UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_without_index}}$ if UE is not indicated to report SSB based RRM measurement result with the associated SSB index (*reportQuantityRsIndexes* or *maxNrofRSIndexesToReport* is not configured). Otherwise UE shall be able to identify a new detectable inter frequency cell within $T_{\text{identify_inter_with_index}}$. The UE shall be able to identify a new detectable inter frequency SS block of an already detected cell within $T_{\text{identify_inter_without_index}}$.

$$T_{\text{identify_inter_without_index}} = (T_{\text{PSS/SSS_sync_inter}} + T_{\text{SSB_measurement_period_inter}}) \text{ ms}$$

$$T_{\text{identify_inter_with_index}} = (T_{\text{PSS/SSS_sync_inter}} + T_{\text{SSB_measurement_period_inter}} + T_{\text{SSB_time_index_inter}}) \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync_inter}}$: it is the time period used in PSS/SSS detection given in table 9.3C.7.1-1.

$T_{\text{SSB_time_index_inter}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3C.7.1-2.

$T_{\text{SSB_measurement_period_inter}}$: equal to a measurement period of SSB based measurement given in table 9.3C.7.2-1.

$\text{CSSF}_{\text{inter}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{outside_gap},i}$ in clause 9.1.5.1.

K_p is the scaling factor for a SSB frequency layer to be measured without measurement gaps. $K_p = N_{\text{total_SAN}} / N_{\text{available_SAN}}$, where $N_{\text{available_SAN}}$ and $N_{\text{total_SAN}}$ are calculated as follows:

- For a window W of duration $\max(\text{SMTC period}, \text{MGRP_max})$, where
 - If UE supports *parallelMeasurementGap-r17* and is configured with concurrent measurement gaps, MGRP max is the maximum MGRP across all configured per-UE measurement gap. Otherwise, MGRP max is the MGRP of configured measurement gap.
 - Starting from the beginning of any SMTC occasion:
 - $N_{\text{total_SAN}}$ is the total number of SMTC occasions within the window, including those overlapped and non-overlapped with measurement gap occasions within the window, and

- $N_{\text{available_SAN}}$ is the number of SMTC occasions within the window W that don't collide with any non-dropped MG occasion within or outside the window W , after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1C.8.3. The collision rule between SMTC occasion and measurement gap occasion is defined in section 9.1C.9.1

$K_p = [1]$ when $N_{\text{available_SAN}} = 0$ and measurement gap sharing in clause 9.1.2.1a shall apply.

$K_p = 1$ when inter-frequency SMTC is fully non overlapping with measurement gaps.

$K_{\text{satellite}}$: it is a satellite specific scaling factor.

- If SMTCs do not overlap with each other, and if LEO and/or GEO satellite(s) is/are required to be measured within SMTC
- $K_{\text{satellite}} = 1$, if GSO satellite(s) is/are measured on the carrier
- $K_{\text{satellite}} = \left\lfloor \frac{\text{Num of LEO satellites to be measured in the SMTC}}{\text{number of LEO satellites UE is capable to measure in one SMTC}} \right\rfloor$, if LEO satellite(s) is/are measured on the carrier.
- If SMTCs partially overlap with each other, and if LEO and/or GEO satellite(s) is/are required to be measured within overlapped SMTCs
- $K_{\text{satellite}} = \text{number of overlapped SMTCs}$, if only GEO satellite(s) is/are measured on the carrier
- $K_{\text{satellite}} = \sum_i \left\lfloor \frac{\text{Num of LEO satellites to be measured in the SMTC } i}{\text{number of LEO satellites UE is capable to measure in one SMTC}} \right\rfloor$, if only LEO satellite(s) is/are measured on the carrier.

Table 9.3C.7.1-1: Time period for PSS/SSS detection, (FR1)

DRX cycle	$T_{\text{PSS/SSS_sync_inter}}$
No DRX	$\max(600\text{ms}, \text{ceil}(5 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
$\text{DRX cycle} \leq 320\text{ms}$	$\max(600\text{ms}, \text{ceil}(1.5 \times 5 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
$\text{DRX cycle} > 320\text{ms}$	$\text{ceil}(5 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
NOTE 1: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in <i>SSB-MTC4List-r17</i> .	

Table 9.3C.7.1-2: Time period for time index detection (FR1)

DRX cycle	$T_{\text{SSB_time_index_inter}}$
No DRX	$\max(120\text{ms}, \text{ceil}(3 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
$\text{DRX cycle} \leq 320\text{ms}$	$\max(120\text{ms}, \text{ceil}(1.5 \times 3 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
$\text{DRX cycle} > 320\text{ms}$	$\text{Ceil}(3 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
NOTE 1: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in <i>SSB-MTC4List-r17</i> .	

9.3C.7.2 Measurement period

The UE physical layer shall be capable of reporting SS-RSRP, SS-RSRQ and SS-SINR measurements to higher layers with measurement accuracy as specified in clauses 10.1.4C, 10.1.9C and 10.1.14C, respectively, as shown in table 9.3C.7.2-1, if UE supports inter-frequency measurement without measurement gaps:

Table 9.3C.7.2-1: Measurement period for inter-frequency measurements without gaps ((FR1)

DRX cycle	T _{SSB measurement period inter}
No DRX	$\max(200\text{ms}, \text{ceil}(5 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
DRX cycle ≤ 320ms	$\max(200\text{ms}, \text{ceil}(1.5 \times 5 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
DRX cycle > 320ms	$\text{ceil}(5 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}} \times K_{\text{satellite}}$
NOTE 1: SMTC period is the SMTC period in SMTC configuration which is associated with the target cell to be measured configured in <i>SSB-MTC4List-r17</i> .	

9.3C.7.3 Scheduling availability of UE during inter-frequency measurements

If UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the Network, UE is required to be capable of measuring without measurement gaps when the SSB is completely contained in the active bandwidth part of the UE. When any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note that the SSB symbols to be measured in the following clauses are the SSB symbols indicated by *SSB-ToMeasure* [2], if it is configured; otherwise, all L SSB symbols within the SMTC window duration defined in clause 4.1 of TS 38.213 [3] are included. For UL, the scheduling restriction applies to UL symbols that fully or partially overlap with the restricted symbols as defined below.

9.3C.7.3.1 Void

9.3C.7.3.2 Scheduling availability of UE performing measurements with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UE which do not support *simultaneousRxDataSSB-DiffNumerology-Inter-r16* [14] the following restrictions apply due to SS-RSRP/RSRQ/SINR measurement

- If UE performs inter-frequency measurements without measurement gaps in a FDD band, UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within SMTC window duration.

9.4 Inter-RAT measurements

9.4.1 Introduction

The requirements in this clause are specified for NR–E-UTRAN FDD and NR–E-UTRAN TDD measurements and are applicable without an explicit E-UTRAN neighbour cell list containing physical layer cell identities, for a UE:

- in RRC_CONNECTED state, and
- configured
 - with SA or NR-DC operation mode or configured in NE-DC operation mode by PCell with NR–E-UTRAN FDD or TDD measurement (RSRP, RSRQ, RS-SINR, RSTD, or E-CID RSRP and RSRQ) on E-UTRA non-serving frequency carrier, or
 - with SA operation mode on NR carrier frequencies with CCA by PCell with NR–E-UTRAN FDD or TDD measurement (RSRP, RSRQ, RS-SINR) on E-UTRA non-serving frequency carrier, and
- configured with an appropriate measurement gap pattern according to Table 9.1.2-3.

The requirements in this clause for concurrent measurement gaps are only applied for UE in NR SA operation mode.

For UE supporting *eutra-NeedForGapNCSG-reporting-r17* and indicating *NeedForGapNCSG-InfoEUTRA* for inter-RAT measurement,

- An inter-RAT measurement is defined as measurement without gap if
 - the UE indicates ‘nogap-noncsg’ via *NeedForGapNCSG-InfoEUTRA* for the inter-RAT measurement
- An inter-RAT measurement is defined as measurement with NCSG if
 - the UE indicates ‘ncsg’ via *NeedForGapNCSG-InfoEUTRA* for the inter-RAT measurement

When network configures measurement gap or NCSG, the delay requirements are specified in clause 9.4.2 and 9.4.3.

- An inter-RAT SSB measurement is defined as measurement with gap if
 - the UE indicates ‘gap’ via *NeedForGapNCSG-InfoEUTRA* for the inter-RAT measurement

When network configures measurement gap, the delay requirements are specified in clauses 9.4.2 and 9.4.3.

- For inter-RAT measurements with NCSG, UE may cause scheduling restriction as specified in clause 9.4.2.5 and 9.4.3.5.

When the UE is in NE-DC operation mode and an NR–E-UTRAN FDD or TDD measurement (RSRP, RSRQ, RS-SINR, or E-CID RSRP and RSRQ) configured by NR PCell is on a E-UTRA serving frequency carrier, then the corresponding E-UTRA intra-frequency measurements requirements specified in clause 8.19 of TS 36.133 [15] shall apply.

When *highSpeedMeasFlag-r16* is configured but UE does not support either *measurementEnhancement-r16* or *interRAT-MeasurementEnhancement-r16*, the UE is not required to meet the requirements specified in Table 9.4.2.3-2 and Table 9.4.3.3-2.

Editor’s note: the exact signalling names in the above brackets and in Table 9.4.2.3-2 and Table 9.4.3.3-2 are subject to RAN2 definitions and the brackets shall be replaced by the correct signalling names according to RAN2 specification.

Parameter T_{inter1} used in inter-RAT requirements in clause 9.4 is specified in Table 9.4.1-1 when measurement gap is used, and in Table 9.4.1-2 when NCSG is used.

Table 9.4.1-1: Minimum available time for inter-RAT measurements measurements when measurement gap is configured

Gap Pattern Id	MeasurementGap Length (MGL, ms)	Measurement Gap Repetition Period (MGRP, ms)	Minimum available time for inter-frequency and inter-RAT measurements during 480 ms period (T_{inter1} , ms)
0	6	40	60
1	6	80	30
2	3	40	24 ^{Note 1}
3	3	80	12 ^{Note 1}
4	6	20	120 ^{Note 1}
6	4	20	72 ^{Note 1,3,6}
7	4	40	36 ^{Note 1,4,6}
8	4	80	18 ^{Note 1,5,6}
10	3	20	48 ^{Note 1}

NOTE 1:	When determining UE requirements using Tinter1 for gap pattern IDs 2, 3, 4, 6, 7, 8, 10, Tinter1 = 60 for gap pattern IDs 2, 4, 6, 7, 10, and Tinter1 = 30 for gap pattern IDs 3 and 8 shall be used.
NOTE 2:	Measurement gaps pattern configurations applicability is as specified in Table 9.1.2-1.
NOTE 3:	When this gap pattern is used, the Tinter for E-UTRA inter-frequency measurements is 48 ms corresponding to the first 3 ms of the 4 ms gap.
NOTE 4:	When this gap pattern is used, the Tinter for E-UTRA inter-frequency measurements is 24 ms corresponding to the first 3 ms of the 4 ms gap.
NOTE 5:	When this gap pattern is used, the Tinter for E-UTRA inter-frequency measurements is 12 ms corresponding to the first 3 ms of the 4 ms gap.
NOTE 6:	This gap pattern is applicable for E-UTRA inter-frequency measurements only if gap based NR measurements are also configured.
NOTE 7:	If multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the E-UTRA inter-RAT frequency layers.

Table 9.4.1-2: Minimum available time for inter-RAT measurements when NCSG is configured

NCSG Pattern Id	Measurement Length (ML, ms)	Visible Interruption Repetition Period (VIRP, ms)	Minimum available time for inter-frequency and inter-RAT measurements during 480 ms period (Tinter1, ms)
0	5	40	60
1	5	80	30
2	2	40	24 ^{Note 1}
3	2	80	12 ^{Note 1}
4	5	20	120 ^{Note 1}
6	3	20	72 ^{Note 1,3}
7	3	40	36 ^{Note 1,3}
8	3	80	18 ^{Note 1,3}
10	2	20	48 ^{Note 1}
NOTE 1: When determining UE requirements using Tinter1 for NCSG pattern IDs 2, 3, 4, 6, 7, 8, 10, Tinter1 = 60 for NCSG pattern IDs 2, 4, 6, 7, 10, and Tinter1 = 30 for NCSG pattern IDs 3 and 8 shall be used.			
NOTE 2: NCSG pattern configurations applicability is as specified in Table 9.1.2C-1.			
NOTE 3: This NCSG pattern is applicable for E-UTRA inter-frequency measurements only if NCSG based NR measurements are also configured.			

A UE configured with gap/NCSG pattern ID 2, 3 or 10 shall be able to detect a target cell, provided that

- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell begins not earlier than 500 µs from the start of the measurement gap, and
- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell ends not later than 500 µs before the end of the measurement gap in case of FDD and not later than 750 µs before the end of measurement gap in case of TDD.

A UE configured with gap/NCSG pattern ID 6, 7 or 8 shall be able to detect a target cell, provided that

- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell begins not earlier than 500 µs from the start of the measurement gap, and
- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell ends no later than 1500 µs before the end of the measurement gap in case of FDD and no later than 1750 µs before the end of measurement gap in case of TDD.

9.4.2 NR – E-UTRAN FDD measurements

9.4.2.1 Introduction

The requirements are applicable for NR–E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements.

In the requirements, an E-UTRAN FDD cell is considered to be detectable when:

- RSRP related conditions in the accuracy requirements in clause 10.2.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
- RSRQ related conditions in the accuracy requirements in clause 10.2.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
- RS-SINR related conditions in the accuracy requirements in clause 10.2.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.19 of TS 36.133 [15].

9.4.2.2 Requirements when no DRX is used

When the UE requires measurement gaps or NCSG to identify and measure inter-RAT cells and an appropriate measurement gap pattern or NCSG is scheduled, or when the UE is capable of concurrent measurement gap patterns and concurrent measurement gap patterns are scheduled, or an appropriate pre-MG is scheduled and activated, or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable FDD cell within $T_{\text{Identify, E-UTRAN FDD}}$ according to the following expression:

$$T_{\text{Identify, E-UTRAN FDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1}}} \cdot \text{CSSF}_{\text{interRAT}} \cdot K_{\text{gap_EUTRA}} \quad \text{ms},$$

where:

$T_{\text{BasicIdentify}} = 480 \text{ ms}$,

T_{Inter1} is defined in clause 9.4.1,

$\text{CSSF}_{\text{interRAT}} = \text{CSSF}_{\text{within_gap}, i}$ when measurement gaps are configured, or $\text{CSSF}_{\text{within_ncsg}, i}$ when NCSGs are configured, is the scaling factor for the measured inter-RAT E-UTRA carrier i which is calculated as specified in clause 9.1.5.2.

For a UE supporting and configured with concurrent measurement gaps, $K_{\text{gap_EUTRA}}$: it is the scaling factor for an E-UTRAN frequency layer to be measured within the associated measurement gap pattern. $K_{\text{gap}} = 1$ when the UE is not configured with concurrent measurement gaps. Otherwise, $K_{\text{gap_EUTRA}} = N_{\text{total}} / N_{\text{available}}$ for UE configured with concurrent measurement gaps.

For a window W of duration MGRP_max , where MGRP_max is the maximum MGRP across all configured per-UE measurement gap(s) and per-FR measurement gap(s) for FR1, and starting from the beginning of any associated gap occasion:

N_{total} is the total number of associated gap occasions within the window, including those dropped and non-dropped occasions of the associated measurement gap within the window, and

$N_{\text{available}}$ is the number of non-dropped associated measurement gap occasions after accounting for collisions between the measurement gaps by applying the measurement gap collision rule in section 9.1.8.3.

Requirements do not apply for UE configured with concurrent measurement gaps, if $N_{\text{available}} = 0$

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{\text{Measure, E-UTRAN FDD}}$ defined in Table 9.4.2.2-1.

Table 9.4.2.2-1: Measurement period and measurement bandwidth

Configuration	Physical Layer Measurement period: $T_{\text{Measure, E-UTRAN FDD}}$ [ms]	Measurement bandwidth [RB]
0	$480 \times [\text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})]$	6
1 (Note 1)	$240 \times [\text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})]$	50
NOTE 1: This configuration is optional.		
NOTE 2: $K_{\text{gap_EUTRA}}$ is only applicable for a UE supporting concurrent measurement gaps. Otherwise $K_{\text{gap_EUTRA}} = 1$		

When measurement gaps are scheduled for E-UTRAN FDD inter-RAT measurements, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting RSRP, RSRQ, and RS-SINR measurements to higher layers with measurement period $T_{\text{Measure, E-UTRAN FDD}}$ given by table 9.4.2.2-1.

If higher layer filtering is used, an additional cell identification delay can be expected.

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2.

The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3.

The NR – E-UTRAN FDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

9.4.2.3 Requirements when DRX is used

When DRX is in use and an appropriate measurement gap pattern or NCSG is configured, or when the UE is capable of concurrent measurement gap patterns and concurrent measurement gap patterns are configured, or an appropriate pre-MG is scheduled and activated, the UE shall be able to identify a new detectable E-UTRAN FDD cell within $T_{\text{Identify, E-UTRAN FDD}}$ specified in Table 9.4.2.3-1. When *highSpeedMeasFlag-r16* is configured and UE supports the enhanced inter-RAT E-UTRAN measurement requirements, the UE shall be able to identify a new detectable E-UTRAN FDD cell within $T_{\text{Identify, E-UTRAN FDD}}$ specified in Table 9.4.2.3-2.

For a UE supporting and configured with concurrent measurement gaps, $K_{\text{gap_EUTRA}}$: it is the scaling factor for an E-UTRAN frequency layer to be measured within the associated measurement gap pattern. $K_{\text{gap}} = 1$ when the UE is not configured with concurrent measurement gaps. Otherwise, $K_{\text{gap_EUTRA}} = N_{\text{total}} / N_{\text{available}}$ for UE configured with concurrent measurement gaps.

For a window W of duration MGRP_max , where MGRP_max is the maximum MGRP across all configured per-UE measurement gap(s) and per-FR measurement gap(s) for FR1, and starting from the beginning of any associated gap occasion:

N_{total} is the total number of associated gap occasions within the window, including both dropped and non-dropped instances of the associated measurement gap within the window, and

$N_{\text{available}}$ is the number of non-dropped associated measurement gap occasions after accounting for collisions between the measurement gaps by applying the measurement gap collision rule in section 9.1.8.3.

Requirements do not apply for UE configured with concurrent measurement gaps, if $N_{\text{available}} = 0$

Table 9.4.2.3-1: Requirement to identify a newly detectable E-UTRAN FDD cell

DRX cycle length (s)	$T_{\text{Identify, E-UTRAN FDD}}$ (s) (DRX cycles)	
	Gap/NCSG period = 40 ms, 20 ms	Gap/NCSG period = 80 ms
≤ 0.16	Non-DRX requirements in clause 9.4.2.2 apply	Non-DRX requirements in clause 9.4.2.2 apply
0.256	$5.12 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})$ $(20 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}}))$	$7.68 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})$ $(30 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}}))$
0.32	$6.4 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})$ $(20 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}}))$	$7.68 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})$ $(24 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}}))$
$0.32 < \text{DRX-cycle} \leq 10.24$	Note1 ($20 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})$)	Note1 ($20 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $\text{CSSF}_{\text{interRAT}}$ is as defined in clause 9.4.2.2. NOTE 3: $K_{\text{gap_EUTRA}}$ is only applicable for a UE supporting concurrent measurement gaps. Otherwise $K_{\text{gap_EUTRA}} = 1$ NOTE 4: If multiple concurrent gaps are configured, the gap period is the periodicity of the MG pattern associated to the E-UTRA inter-RAT frequency layer.		

Table 9.4.2.3-2: Requirement to identify a newly detectable E-UTRAN FDD cell when *highSpeedMeasFlag-r16* is configured

DRX cycle length (s)	T _{identify, E-UTRAN FDD} (s) (DRX cycles)	
	Gap/NCSG period = 40 ms, 20 ms	Gap/NCSG period = 80 ms
≤0.16	Non-DRX requirements in clause 9.4.2.2 apply	Non-DRX requirements in clause 9.4.2.2 apply
0.16 < DRx cycle ≤ 0.32	Note 1 (15 * CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))	
0.32 < DRx cycle ≤ 0.64	Note 1 (10 * CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))	
DRx cycle = 1.024	Note 1 (10 * CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))	Note 1 (10 * CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))
DRx cycle = 1.28	Note 1 (8 * CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))	Note 1 (8 * CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))
1.28 < DRX-cycle ≤ 10.24	Note 1 (20 * CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))	Note 1 (20 * CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))
NOTE 1: The time depends on the DRX cycle length. NOTE 2: CSSF _{interRAT} is as defined in clause 9.4.2.2. NOTE 3: When <i>highSpeedMeasFlag-r16</i> is configured, the requirements apply only to UE supporting either <i>measurementEnhancement-r16</i> or [<i>interRAT-MeasurementEnhancement-r16</i>]. NOTE 4: K _{gap_EUTRA} is only applicable for a UE supporting concurrent measurement gaps. Otherwise K _{gap_EUTRA} = 1 NOTE 5: If multiple concurrent gaps are configured, the gap period is the periodicity of the MG pattern associated to the E-UTRA inter-RAT frequency layer.		

When DRX is in use, the UE shall be capable of performing NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN FDD cells per E-UTRA FDD frequency layer during each layer 1 measurement period, for up to 7 E-UTRA FDD carrier frequency layers, and the UE physical layer shall be capable of reporting NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements to higher layers with the measurement period T_{measure, E-UTRAN FDD} specified in Table 9.4.2.3-2.

Table 9.4.2.3-2: Requirement to measure E-UTRAN FDD cells

DRX cycle length (s)	T _{measure, E-UTRAN FDD} (s) (DRX cycles)
≤0.08	Non-DRX requirements in clause 9.4.2.2 apply
0.08 < DRX-cycle ≤ 10.24	Note 1 (5 * CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))
NOTE 1: The time depends on the DRX cycle length. NOTE 2: CSSF _{interRAT} is as defined in clause 9.4.2.2. NOTE 3: K _{gap_EUTRA} is only applicable for a UE supporting concurrent measurement gaps. Otherwise K _{gap_EUTRA} = 1	

If higher layer filtering is used, an additional cell identification delay can be expected.

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2.
 The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3.
 The NR – E-UTRAN FDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

9.4.2.4 Measurement reporting requirements

9.4.2.4.1 Periodic Reporting

The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

9.4.2.4.2 Event-Triggered Periodic Reporting

The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

The first report in event-triggered periodic measurement reporting shall meet the requirements specified in clause 9.4.2.4.3.

9.4.2.4.3 Event-Triggered Reporting

The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

The UE shall not send any event-triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times T_{\text{TTI}_{\text{DCCH}}}$ where $T_{\text{TTI}_{\text{DCCH}}}$ is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{\text{Identify, E-UTRAN FDD}}$ defined in clauses 9.4.2.2 and 9.4.2.3 without DRX and with DRX, respectively. When L3 filtering is used, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{\text{Identify, E-UTRAN FDD}}$ becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{\text{Measure, E-UTRAN FDD}}$ provided the timing to that cell has not changed more than $\pm 50 T_s$ while measurement gap or NCSG has not been available and the L3 filter has not been used.

9.4.2.5 Scheduling Availability During NR – E-UTRAN FDD measurements with NCSG

When a serving cell and an E-UTRA FDD measurement object are in bands with overlapping frequency, UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within NCSG ML. Otherwise, no scheduling restriction to the serving cell is allowed due to NR – E-UTRAN FDD measurements with NCSG.

9.4.3 NR – E-UTRAN TDD measurements

9.4.3.1 Introduction

The requirements are applicable for NR–E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements.

In the requirements, an E-UTRAN TDD cell is considered to be detectable when:

- RSRP related conditions in the accuracy requirements in clause 10.2.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
 - RSRQ related conditions in the accuracy requirements in clause 10.2.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
- RS-SINR related conditions in the accuracy requirements in clause 10.2.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.19 of TS 36.133 [15].

9.4.3.2 Requirements when no DRX is used

When the UE requires measurement gaps or NCSG to identify and measure inter-RAT cells and an appropriate measurement gap pattern or NCSG is scheduled, or when the UE is capable of concurrent measurement gap patterns and concurrent measurement gap patterns are scheduled, or an appropriate pre-MG is scheduled and activated or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable TDD cell within $T_{\text{Identify, E-UTRAN TDD}}$ according to the following expression:

- When configuration 0 or configuration 1 in Table 9.4.3.2-1 is applied,

$$T_{\text{Identify,E-UTRAN TDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1}}} \cdot \text{CSSF}_{\text{interRAT}} \cdot K_{\text{gap_EUTRA}} \quad \text{ms},$$

- When configuration 2 or configuration 3 in Table 9.4.3.2-1 is applied,

$$T_{\text{Identify,E-UTRAN TDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1}}} \cdot \text{CSSF}_{\text{interRAT}} \cdot K_{\text{gap_EUTRA}} + 240 \cdot \text{CSSF}_{\text{interRAT}} \cdot K_{\text{gap_EUTRA}} \quad \text{ms},$$

where:

$$T_{\text{BasicIdentify}} = 480 \text{ ms},$$

T_{Inter1} is defined in clause 9.4.1,

$\text{CSSF}_{\text{interRAT}} = \text{CSSF}_{\text{within_gap},i}$ when measurement gaps are configured, or $\text{CSSF}_{\text{within_ncsg},i}$ when NCSGs are configured, is the scaling factor for the measured inter-RAT E-UTRA carrier i which is calculated as specified in clause 9.1.5.2.

For a UE supporting and configured with concurrent measurement gaps, $K_{\text{gap_EUTRA}}$: it is the scaling factor for an E-UTRAN frequency layer to be measured within the associated measurement gap pattern. $K_{\text{gap}} = 1$ when the UE is not configured with concurrent measurement gaps. Otherwise, $K_{\text{gap_EUTRA}} = N_{\text{total}} / N_{\text{available}}$ for UE configured with concurrent measurement gaps.

- For a window W of duration MGRP_max , where MGRP_max is the maximum MGRP across all configured per-UE measurement gap(s) and per-FR measurement gap(s) for FR1, and starting from the beginning of any associated gap occasion:
 - N_{total} is the total number of associated gap occasions within the window, including those dropped and non-dropped occasions of the associated measurement gap within the window, and
 - $N_{\text{available}}$ is the number of non-dropped associated measurement gap occasions after accounting for collisions between the measurement gaps by applying the measurement gap collision rule in section 9.1.8.3.
- Requirements do not apply for UE configured with concurrent measurement gaps, if $N_{\text{available}} = 0$

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{\text{Measure, E-UTRAN TDD}}$ defined in Table 9.4.3.2-1.

Table 9.4.3.2-1: $T_{\text{Measure, E-UTRAN TDD}}$ for different configurations

Configuration	Measurement bandwidth (RB)	Number of UL/DL sub-frames per half frame (5 ms)		DwPTS		$T_{\text{Measure, E-UTRAN TDD}}$ (ms)
		DL	UL	Normal CP	Extended CP	
0	6	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	$480 \times \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})$
1 (Note 1)	50	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	$240 \times \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})$
2	6	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	$720 \times \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})$
3 (Note 1)	50	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	$480 \times \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})$
NOTE 1: This configuration is optional. NOTE 2: Void NOTE 3: $K_{\text{gap_EUTRA}}$ is only applicable for a UE supporting concurrent measurement gaps. Otherwise $K_{\text{gap_EUTRA}} = 1$						

When measurement gaps are scheduled for E-UTRAN TDD inter-RAT measurements, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting RSRP, RSRQ, and RS-SINR measurements to higher layers with measurement period $T_{\text{measure, E-UTRAN TDD}}$ given by table 9.4.3.2-1.

If higher layer filtering is used, an additional cell identification delay can be expected.

The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2.
The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3.
The NR – E-UTRAN TDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

9.4.3.3 Requirements when DRX is used

When DRX is in use and an appropriate measurement gap pattern or NCSG is configured, or when the UE is capable of concurrent measurement gap patterns and concurrent measurement gap patterns are configured, or an appropriate pre-MG is scheduled and activated, the UE shall be able to identify a new detectable E-UTRAN TDD cell within $T_{\text{Identify, E-UTRAN TDD}}$ specified in Table 9.4.3.3-1. When *highSpeedMeasFlag-r16* is configured and UE supports the enhanced inter-RAT E-UTRAN measurement requirements, the UE shall be able to identify a new detectable E-UTRAN TDD cell within $T_{\text{Identify, E-UTRAN TDD}}$ specified in Table 9.4.3.3-2.

For a UE supporting and configured with concurrent measurement gaps, $K_{\text{gap_EUTRA}}$: it is the scaling factor for an E-UTRAN frequency layer to be measured within the associated measurement gap pattern. $K_{\text{gap}} = 1$ when the UE is not configured with concurrent measurement gaps. Otherwise, $K_{\text{gap_EUTRA}} = N_{\text{total}} / N_{\text{available}}$ for UE configured with concurrent measurement gaps.

For a window W of duration MGRP_max , where MGRP_max is the maximum MGRP across all configured per-UE measurement gap(s) and per-FR measurement gap(s) for FR1, and starting from the beginning of any associated gap occasion:

N_{total} is the total number of associated gap occasions within the window, including both dropped and non-dropped instances of the associated measurement gap within the window, and

$N_{\text{available}}$ is the number of non-dropped associated measurement gap occasions after accounting for collisions between the measurement gaps by applying the measurement gap collision rule in section 9.1.8.3.

Requirements do not apply for UE configured with concurrent measurement gaps, if $N_{\text{available}} = 0$

Table 9.4.3.3-1: Requirement to identify a newly detectable E-UTRAN TDD cell

DRX cycle length (s)	$T_{\text{Identify, E-UTRAN TDD}}$ (s) (DRX cycles)	
	Gap/NCSG period = 40 ms, 20 ms	Gap/NCSG period = 80 ms
≤ 0.16	Non-DRX requirements in clause 9.4.3.2 apply	Non-DRX requirements in clause 9.4.3.2 apply
0.256	$5.12 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})$ $(20 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}}))$	$7.68 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})$ $(30 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}}))$
0.32	$6.4 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})$ $(20 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}}))$	$7.68 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})$ $(24 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}}))$
$0.32 < \text{DRX-cycle} \leq 10.24$	Note1 ($20 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})$)	Note1 ($20 * \text{CSSF}_{\text{interRAT}} \times \text{Ceil}(K_{\text{gap_EUTRA}})$)
NOTE 1: The time depends on the DRX cycle length. NOTE 2: $\text{CSSF}_{\text{interRAT}}$ is as defined in clause 9.4.3.2. NOTE 3: $K_{\text{gap_EUTRA}}$ is only applicable for a UE supporting concurrent measurement gaps. Otherwise $K_{\text{gap_EUTRA}} = 1$ NOTE 4: If multiple concurrent gaps are configured, the gap period is the periodicity of the MG pattern associated to the E-UTRA inter-RAT frequency layer.		

Table 9.4.3.3-2: Requirement to identify a newly detectable E-UTRAN TDD cell when *highSpeedMeasFlag-r16* is configured

DRX cycle length (s)	T _{identify, E-UTRAN TDD} (s) (DRX cycles)	
	Gap/NCSG period = 40 ms, 20 ms	Gap/NCSG period = 80 ms
≤0.16	Non-DRX requirements in clause 9.4.3.2 apply	Non-DRX requirements in clause 9.4.3.2 apply
0.16<DRx cycle≤0.32	Note 1(15*CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))	
0.32<DRx cycle ≤ 0.64	Note 1(10*CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))	
DRx cycle = 1.024	Note 1(10*CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))	Note 1(10*CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))
DRx cycle = 1.28	Note 1(8*CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))	Note 1(8*CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))
1.28< DRX-cycle ≤10.24	Note1 (20*CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))	Note1 (20*CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))
NOTE 1: The time depends on the DRX cycle length. NOTE 2: CSSF _{interRAT} is as defined in clause 9.4.3.2. NOTE 3: When <i>highSpeedMeasFlag-r16</i> is configured, the requirements apply only to UE supporting either <i>measurementEnhancement-r16</i> or [<i>interRAT-MeasurementEnhancement-r16</i>]. NOTE 4: K _{gap_EUTRA} is only applicable for a UE supporting concurrent measurement gaps. Otherwise K _{gap_EUTRA} =1 NOTE 5: If multiple concurrent gaps are configured, the gap period is the periodicity of the MG pattern associated to the E-UTRA inter-RAT frequency layer.		

When DRX is in use, the UE shall be capable of performing NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN TDD cells per E-UTRA TDD frequency layer during each layer 1 measurement period, for up to 7 E-UTRA TDD carrier frequency layers, and the UE physical layer shall be capable of reporting NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements to higher layers with the measurement period T_{measure, E-UTRAN TDD} specified in Table 9.4.3.3-3.

Table 9.4.3.3-3: Requirement to measure E-UTRAN TDD cells

DRX cycle length (s)	T _{measure, E-UTRAN TDD} (s) (DRX cycles)
≤0.08	Non-DRX Requirements in clause 9.4.3.2 apply
0.128	For configuration 2 ^{Note3} , non-DRX requirements in clause 9.4.3.2 apply, Otherwise: Note1 (5*CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))
0.128<DRX-cycles≤10.24	Note1 (5*CSSF _{interRAT} X Ceil(K _{gap_EUTRA}))
NOTE 1: The time depends on the DRX cycle length. NOTE 2: CSSF _{interRAT} is as defined in clause 9.4.3.2. NOTE 3: See Table 9.4.3.2-1. NOTE 4: K _{gap_EUTRA} is only applicable for a UE supporting concurrent measurement gaps. Otherwise K _{gap_EUTRA} =1	

If higher layer filtering is used, an additional cell identification delay can be expected.

The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2.
 The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3.
 The NR – E-UTRAN TDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

9.4.3.4 Measurement reporting requirements

9.4.3.4.1 Periodic Reporting

The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

9.4.3.4.2 Event-Triggered Periodic Reporting

The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

The first report in event-triggered periodic measurement reporting shall meet the requirements specified in clause 9.4.3.4.3.

9.4.3.4.3 Event-Triggered Reporting

The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

The UE shall not send any event-triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times T_{\text{TI}_{\text{DCCH}}}$ where $T_{\text{TI}_{\text{DCCH}}}$ is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{\text{Identify, E-UTRAN TDD}}$ defined in clauses 9.4.3.2 and 9.4.3.3 without DRX and with DRX, respectively. When L3 filtering is used, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{\text{Identify, E-UTRAN TDD}}$ becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{\text{Measure, E-UTRAN TDD}}$ provided the timing to that cell has not changed more than $\pm 50 T_s$ while measurement gap or NCSG has not been available and the L3 filter has not been used.

9.4.3.5 Scheduling Availability During NR – E-UTRAN TDD measurements with NCSG

When UE supports *simultaneousRxTxInterBandENDC* for a band combination, no scheduling restriction is applicable to NR – E-UTRAN TDD measurements with NCSG in this band combination; otherwise UE is not expected to transmit PUCCH/PUSCH/SRS on all symbols within NCSG ML.

When a serving cell and an E-UTRA TDD measurement object are in bands with overlapping frequency, UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on all symbols within NCSG ML. Otherwise, no scheduling restriction to the serving cell is allowed due to NR – E-UTRAN TDD measurements with NCSG.

9.4.4 Inter-RAT RSTD measurements

9.4.4.1 NR – E-UTRAN FDD RSTD measurements

9.4.4.1.1 Introduction

The requirements are applicable for NR–E-UTRAN FDD RSTD measurements requested via LPP [22, 27].

When the UE is in NE-DC operation mode and an NR–E-UTRAN FDD RSTD measurement configured by NR PCell is on a E-UTRA serving frequency carrier, then the corresponding E-UTRA intra-frequency measurements requirements as follows shall apply.

- Measurements configured on E-UTRA PSCC shall meet E-UTRAN OTDOA intra-frequency measurements requirements in clause 8.1.2.5. The applicable measurement accuracy requirements are in clause 9.1.10.
- Measurements configured on E-UTRA SCC shall meet all applicable requirements in clause 8.4, except that the terms PCell and primary component carrier shall be deemed to be swapped with PSCell and PSCC. The

applicable measurement accuracy requirements are in clause 9.1.12, except that the terms PCell and primary component carrier shall be deemed to be swapped with PSCell and PSCC.

The requirements in clause 9.4.4.1 apply when:

- the UE is provided with the LTE timing information via LPP [27], including both *nr-LTE-SFN-Offset* and *nr-LTE-fineTiming-Offset*, or
- the UE is not provided with *nr-LTE-SFN-Offset* or *nr-LTE-fineTiming-Offset*, or
- the UE is provided with *nr-LTE-SFN-Offset* but not with *nr-LTE-fineTiming-Offset*.

When the UE is not aware of the SFN of at least one LTE cell in the OTDOA assistance data, the UE may be using autonomous gaps to acquire SFN of the OTDOA assistance data reference cell prior to requesting measurement gaps for performing the requested E-UTRA RSTD measurements before the $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ time period starts while meeting all the requirements in clause 9.4.4.1.2, provided that the OTDOA assistance data is provided to allow sufficient time for the UE to acquire the SFN before the $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ starts.

When the UE is not aware of and cannot derive the subframe timing difference between the NR serving cell and the OTDOA assistance data reference cell, the UE may need to request measurement gaps to perform cell detection for the OTDOA assistance data reference cell prior to requesting measurement gaps for performing the requested E-UTRA RSTD measurements before the $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ time period starts while meeting all the requirements in clause 9.4.4.1.2, provided that the OTDOA assistance data is provided to allow sufficient time for the UE to detect the cell before the $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ starts.

9.4.4.1.2 Requirements

When the physical layer cell identities of neighbour cells together with the OTDOA assistance data are provided, the UE shall be able to detect and measure inter-RAT E-UTRAN FDD RSTD, specified in TS 38.215 [4], for at least $n=16$ cells, including the reference cell, within $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ ms as given below:

$$T_{\text{RSTD InterRAT, E-UTRAN FDD}} = T_{\text{PRS}} \cdot (M - 1) + \Delta \quad \text{ms},$$

where

$T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ is the total time for detecting and measuring at least n cells,

T_{PRS} is the largest value of the cell-specific positioning subframe configuration period, defined in TS 36.211 [23], among the measured n cells including the reference cell,

M is the number of PRS positioning occasions as defined in Table 9.4.4.1.2-1, where each PRS positioning occasion comprises of N_{PRS} ($1 \leq N_{\text{PRS}} \leq 6$) consecutive downlink positioning subframes defined in TS 36.211 [23],

$\text{CSSF}_{\text{interRAT}} = \text{CSSF}_{\text{within_gap},i}$ is the scaling factor determined by the gap sharing scheme for the RSTD measurements on the carrier frequency i as defined in clause 9.1.5.2,

$\Delta = 160 \cdot \left\lceil \frac{n}{M} \right\rceil$ ms is the measurement time for a single PRS positioning occasion which includes the sampling time and the processing time, and

the n cells are distributed on up to two E-UTRAN FDD carrier frequencies.

Table 9.4.4.1.2-1: Number of PRS positioning occasions within $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$

Positioning subframe configuration period, T_{PRS}	Number of PRS positioning occasions, M	
	$f2$ ^{Note1}	$f1$ and $f2$ ^{Note2}
160 ms	$16 \times \text{CSSF}_{\text{interRAT}}$	$32 \times \text{CSSF}_{\text{interRAT}}$
>160 ms	$8 \times \text{CSSF}_{\text{interRAT}}$	$16 \times \text{CSSF}_{\text{interRAT}}$

NOTE 1: When inter-RAT E-UTRAN FDD RSTD measurements are performed over the reference cell and neighbour cells, which belong to the E-UTRAN FDD carrier frequency f2.

NOTE 2: When inter-RAT E-UTRAN FDD RSTD measurements are performed over the reference cell and the neighbour cells, which belong to the E-UTRAN FDD carrier frequency f1 and the E-UTRAN FDD carrier frequency f2 respectively.

The UE physical layer shall be capable of reporting RSTD for the reference cell and all the neighbor cells i out of at least $(n-1)$ neighbor cells within $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ provided:

$(\text{PRS } \hat{E}_s / \text{Iot})_{\text{ref}} \geq -6 \text{ dB}$ for all Frequency Bands for the reference cell,
 $(\text{PRS } \hat{E}_s / \text{Iot})_i \geq -13 \text{ dB}$ for all Frequency Bands for neighbour cell i ,
 $(\text{PRS } \hat{E}_s / \text{Iot})_{\text{ref}}$ and $(\text{PRS } \hat{E}_s / \text{Iot})_i$ conditions apply for all subframes of at least $L = \frac{M}{2}$ PRS positioning occasions,
 PRP 1,2_{dBm} according to TS 36.133 [15, Annex B.2.6] for a corresponding Band,

$\text{PRS } \hat{E}_s / \text{Iot}$ is defined as the ratio of the average received energy per PRS resource element during the useful part of the symbol to the average received power spectral density of the total noise and interference for this resource element, where the ratio is measured over all resource elements which carry PRS.

The time $T_{\text{RSTD InterRAT, E-UTRAN FDD}}$ starts from the first subframe of the PRS positioning occasion closest in time after both the *OTDOA-RequestLocationInformation* message and the OTDOA assistance data in the *OTDOA-ProvideAssistanceData* message via LPP as specified in TS 38.305 [22], are delivered to the physical layer of the UE.

The RSTD measurement accuracy for all measured neighbor cells i shall be fulfilled according to the accuracy as specified in clause 10.2.4.

9.4.4.1.2.1 RSTD Measurement Reporting Delay

This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times \text{TTI}_{\text{DCCH}}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

9.4.4.1.2.2 Requirements for acquiring the timing of the E-UTRA OTDOA reference cell

When the UE is not aware of the SFN of at least one LTE cell in the OTDOA assistance data, the UE supporting per-FR gaps may make autonomous gaps in downlink reception and uplink transmission of the PCell, PSCell, and each of the SCells in FR1 for acquiring SFN of the reference cell in the E-UTRA OTDOA assistance data, while no autonomous gaps in downlink reception or uplink transmission are allowed in any of the UE serving cells in FR2. The UE, which are only supporting per-UE gaps, may make autonomous gaps in downlink reception and uplink transmission of the PCell, PSCell, and each of the SCells for acquiring the SFN of the reference cell in the E-UTRA OTDOA assistance data.

When the UE is not aware of and cannot derive the subframe timing difference between the NR serving cell and the OTDOA assistance data reference cell, the UE may need to request measurement gaps while indicating *eutra-FineTimingDetection* according to TS 38.331 [2] for detecting the reference cell in the E-UTRA OTDOA assistance data.

When the UE is performing one or both of SFN acquisition or cell detection as specified above, the UE shall be able to determine the timing of the E-UTRA OTDOA assistance data reference cell during the time period

$$T_{\text{RefCell,E-UTRAN}} = T_{\text{Detect, E-UTRAN FDD}} + T_{\text{MIB}} + T_{\text{ECGI}},$$

where

$T_{\text{Detect, E-UTRAN FDD}} = T_{\text{Identify, E-UTRAN FDD}} - T_{\text{measure, E-UTRAN FDD}}$ is according to clause 9.4.2 assuming $\text{CSSF}_{\text{interRAT}}=1$ and it is the time needed to detect the E-UTRA OTDOA assistance data reference cell when the UE needs to acquire the subframe and slot timing of the cell, provided the UE is configured with measurement gaps ($T_{\text{Detect, E-UTRAN FDD}}=0$ when both *nr-LTE-SFN-Offset* and *nr-LTE-fineTiming-Offset* are provided in the E-UTRA OTDOA assistance data or the E-UTRA OTDOA assistance data reference cell is known to the UE), and

$T_{\text{MIB}} = 50$ ms is the time required to acquire SFN and/or PHICH configuration of the E-UTRA OTDOA assistance data reference cell provided the OTDOA assistance data reference cell is decodable and at least all E-UTRA subframes #0 during T_{MIB} are available at the UE receiver ($T_{\text{MIB}}=0$ when *nr-LTE-SFN-Offset* is provided in the E-UTRA OTDOA assistance data and ECGI acquisition is not needed), and

$T_{\text{ECGI}} = 100$ ms is the time required to acquire ECGI of the E-UTRA OTDOA assistance data reference cell when *cellGlobalId* is included in *OTDOA-ReferenceCellInfo* and the UE is not aware of the ECGI of this cell ($T_{\text{ECGI}} = 0$ when *cellGlobalId* is not included in *OTDOA-ReferenceCellInfo* or the UE is aware of the ECGI of the E-UTRA OTDOA assistance data reference cell).

When detecting the E-UTRAN OTDOA reference cell, the requirements in this clause shall be met, provided the conditions for the detectable cell are fulfilled according to clause 9.4.2.1. In addition, the MIB of the E-UTRA OTDOA reference cell whose SFN is acquired shall be considered decodable by the UE provided the PBCH demodulation requirements are met according to TS 36.101 [25].

The requirement for acquiring the timing of the E-UTRA OTDOA reference cell within $T_{\text{RefCell, E-UTRAN}}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [2] is used.

When $T_{\text{MIB}} > 0$ and UE is using autonomous gaps during T_{MIB} , the UE shall transmit at least $N_{\text{ACK/NACK, MIB, FDD}}$ ACK/NACKs on PCell, PSCell, and each of activated SCell(s) in the frequency range where the autonomous gaps are created, specified in Table 9.4.4.1.2.2-1. When both $T_{\text{MIB}} > 0$ and $T_{\text{ECGI}} > 0$ and UE is using autonomous gaps during $T_{\text{MIB}} + T_{\text{ECGI}}$, the UE shall transmit on PCell, PSCell, and each of activated SCell(s) in the frequency range where autonomous gaps are created at least $N_{\text{ACK/NACK, MIB+ECGI, FDD}}$ ACK/NACKs specified in Table 9.4.4.1.2.2-3, provided the OTDOA reference cell bandwidth is configured in the OTDOA assistance data [22, 27]. The requirements in Tables 9.4.4.1.2.2-1, 9.4.4.1.2.2-2, and 9.4.4.1.2.2-3 apply, provided that:

- there is continuous DL data allocation,
- no DRX cycle is used,
- no measurement gaps are configured,
- only one code word is transmitted in each slot,
- 2 slot ACK/NACK feedback is configured,
- 20 ms SMTC period is configured,
- SSBs are transmitted in one slot within SMTC window.

Table 9.4.4.1.2.2-2: Void

Table 9.4.4.1.2.2-2: Number of ACK/NACKs transmitted by the UE during T_{ECGI}

N _{ACK/NACK, ECGI, FDD}	Configuration of the serving cell in which the transmitted ACK/NACKs are counted	
	Duplex mode configuration	SCS
66	FDD	15 kHz
145	FDD	30 kHz
298	FDD	60 kHz
28	TDD ^{Note 1}	15 kHz
67	TDD ^{Note 1}	30 kHz
144	TDD ^{Note 1}	60 kHz
175	TDD ^{Note 2}	60 kHz
363	TDD ^{Note 2}	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18].		
NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

Table 9.4.4.1.2.2-3: Number of ACK/NACKs transmitted by the UE during $T_{\text{MIB}}+T_{\text{ECGI}}$

NACK/NACK, MIB+ECGI, FDD	Configuration of the serving cell in which the transmitted ACK/NACKs are counted	
	Duplex mode configuration	SCS
84	FDD	15 kHz
193	FDD	30 kHz
402	FDD	60 kHz
28	TDD ^{Note 1}	15 kHz
81	TDD ^{Note 1}	30 kHz
159	TDD ^{Note 1}	60 kHz
233	TDD ^{Note 2}	60 kHz
491	TDD ^{Note 2}	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18].		
NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

9.4.4.2 NR – E-UTRAN TDD RSTD measurements

9.4.4.2.1 Introduction

The requirements are applicable for NR–E-UTRAN TDD RSTD measurements requested via LPP [22, 27].

When the UE is in NE-DC operation mode and an NR–E-UTRAN TDD RSTD measurement configured by NR PCell is on a E-UTRA serving frequency carrier, then the corresponding E-UTRA intra-frequency measurements requirements as follows shall apply.

- Measurements configured on E-UTRA PSCC shall meet E-UTRAN OTDOA intra-frequency measurements requirements in clause 8.1.2.5. The applicable measurement accuracy requirements are in clause 9.1.10.
- Measurements configured on E-UTRA SCC shall meet all applicable requirements in clause 8.4, except that the terms PCell and primary component carrier shall be deemed to be swapped with PSCell and PSCC. The applicable measurement accuracy requirements are in clause 9.1.12, except that the terms PCell and primary component carrier shall be deemed to be swapped with PSCell and PSCC.

The requirements in clause 9.4.4.1 apply when:

- the UE is provided with the LTE timing information via LPP [27], including both *nr-LTE-SFN-Offset* and *nr-LTE-fineTiming-Offset*, or
- the UE is not provided with *nr-LTE-SFN-Offset* or *nr-LTE-fineTiming-Offset*, or
- the UE is provided with *nr-LTE-SFN-Offset* but not with *nr-LTE-fineTiming-Offset*.

When the UE is not aware of the SFN of at least one LTE cell in the OTDOA assistance data, the UE may be using autonomous gaps to acquire SFN of the OTDOA assistance data reference cell prior to requesting measurement gaps for performing the requested E-UTRA RSTD measurements before the $T_{\text{RSTD InterRAT, E-UTRAN TDD}}$ time period starts while meeting all the requirements in clause 9.4.4.2.2, provided that the OTDOA assistance data is provided to allow sufficient time for the UE to acquire the SFN before the $T_{\text{RSTD InterRAT, E-UTRAN TDD}}$ starts. When the UE is not aware of and cannot derive the subframe timing difference between the NR serving cell and the OTDOA assistance data reference cell, the UE may need to request measurement gaps to perform cell detection for the OTDOA assistance data reference cell prior to requesting measurement gaps for performing the requested E-UTRA RSTD measurements before the $T_{\text{RSTD InterRAT, E-UTRAN TDD}}$ time period starts while meeting all the requirements in clause 9.4.4.2.2, provided that the OTDOA assistance data is provided to allow sufficient time for the UE to detect the cell before the $T_{\text{RSTD InterRAT, E-UTRAN TDD}}$ starts.

9.4.4.2.2 Requirements

When the physical layer cell identities of neighbour cells together with the OTDOA assistance data are provided, the UE shall be able to detect and measure inter-RAT -UTRAN TDD RSTD, specified in TS 38.215 [4], for at least $n=16$ cells, including the reference cell, within $T_{\text{RSTD InterRAT, E-UTRAN TDD}}$ ms as given below:

$$T_{\text{RSTD InterRAT, E-UTRAN TDD}} = T_{\text{PRS}} \cdot (M - 1) + \Delta \quad \text{ms} ,$$

where

$T_{\text{RSTD InterRAT, E-UTRAN TDD}}$ is the total time for detecting and measuring at least n cells,

T_{PRS} is the largest value of the cell-specific positioning subframe configuration period, defined in TS 36.211 [23], among the measured n cells including the reference cell,

M is the number of PRS positioning occasions as defined in Table 9.4.4.2.2-1, where a PRS positioning occasion is as defined in clause 9.4.4.1.2,

$\text{CSSF}_{\text{interRAT}} = \text{CSSF}_{\text{within_gap},i}$ is the scaling factor determined by the gap sharing scheme for the RSTD measurements on the carrier frequency i as defined in clause 9.1.5.2,

$\Delta = 160 \cdot \left\lceil \frac{n}{M} \right\rceil$ ms is the measurement time for a single PRS positioning occasion which includes the sampling time and the processing time, and

the n cells are distributed on up to two E-UTRAN TDD carrier frequencies.

Table 9.4.4.2.2-1: Number of PRS positioning occasions within $T_{\text{RSTD InterRAT, E-UTRAN TDD}}$

Positioning subframe T_{PRS} configuration period,	Number of PRS positioning occasions, M	
	f2 ^{Note1}	f1 and f2 ^{Note2}
160 ms	$16 \times \text{CSSF}_{\text{interRAT}}$	$32 \times \text{CSSF}_{\text{interRAT}}$
>160 ms	$8 \times \text{CSSF}_{\text{interRAT}}$	$16 \times \text{CSSF}_{\text{interRAT}}$
NOTE 1: When inter-RAT E-UTRAN TDD RSTD measurements are performed over the reference cell and neighbour cells, which belong to the E-UTRAN TDD carrier frequency f2.		
NOTE 2: When inter-RAT E-UTRAN TDD RSTD measurements are performed over the reference cell and the neighbour cells, which belong to the E-UTRAN TDD carrier frequency f1 and the E-UTRAN TDD carrier frequency f2 respectively.		

The requirements in this clause shall apply for all TDD special subframe configurations specified in TS 36.211 [23] and for the TDD uplink-downlink configurations as specified in Table 9.4.4.2.2-2 for UE requiring measurement gaps for these measurements. For UEs capable of performing inter-RAT RSTD measurements without measurement gaps, TDD uplink-downlink subframe configurations as specified in Table 9.4.4.2.2-3 shall apply.

Table 9.4.4.2.2-2: TDD uplink-downlink subframe configurations applicable for inter-RAT RSTD requirements

PRS Transmission Bandwidth (RB)	Applicable TDD uplink-downlink configurations
6, 15	3, 4 and 5
25	1, 2, 3, 4, 5 and 6
50, 75, 100	0, 1, 2, 3, 4, 5 and 6
NOTE 1: Uplink-downlink configurations are specified in Table 4.2-2 in TS 36.211 [23].	

Table 9.4.4.2.2-3: TDD uplink-downlink subframe configurations applicable for inter-RAT RSTD requirements without gaps

PRS Transmission Bandwidth (RB)	Applicable TDD uplink-downlink configurations
---------------------------------	---

6, 15	1, 2, 3, 4 and 5
25, 50, 75, 100	0, 1, 2, 3, 4, 5 and 6
NOTE 1: Uplink-downlink configurations are specified in Table 4.2-2 in TS 36.211 [23].	

The UE physical layer shall be capable of reporting RSTD for the reference cell and all the neighbor cells i out of at least $(n-1)$ neighbor cells within $T_{\text{RSTD InterRAT, E-UTRAN TDD}}$ provided:

$$\begin{aligned} & \left(\text{PRS } \hat{E}_s / \text{Iot} \right)_{\text{ref}} \geq -6 \text{ dB for all Frequency Bands for the reference cell,} \\ & \left(\text{PRS } \hat{E}_s / \text{Iot} \right)_i \geq -13 \text{ dB for all Frequency Bands for neighbour cell } i, \\ & \left(\text{PRS } \hat{E}_s / \text{Iot} \right)_{\text{ref}} \text{ and } \left(\text{PRS } \hat{E}_s / \text{Iot} \right)_i \text{ conditions apply for all subframes of at least } L = \frac{M}{2} \text{ PRS positioning} \end{aligned}$$

occasions,

PRP 1,2_{dBm} according to TS 36.133 [15, Annex B.2.6] for a corresponding Band,

$\text{PRS } \hat{E}_s / \text{Iot}$ is as defined in clause 9.4.4.1.2.

The time $T_{\text{RSTD InterRAT, E-UTRAN TDD}}$ starts from the first subframe of the PRS positioning occasion closest in time after both the OTDOA-RequestLocationInformation message and the OTDOA assistance data in the OTDOA-ProvideAssistanceData message via LPP as specified in TS 38.305 [22], are delivered to the physical layer of the UE.

The RSTD measurement accuracy for all measured neighbor cells i shall be fulfilled according to the accuracy as specified in clause 10.2.4.

9.4.4.2.2.1 RSTD Measurement Reporting Delay

This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times \text{TTI}_{\text{DCCH}}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

9.4.4.2.2.2 Requirements for acquiring the timing of the E-UTRA OTDOA reference cell

When the UE is not aware of the SFN of at least one LTE cell in the OTDOA assistance data, the UE supporting per-FR gaps may make autonomous gaps in downlink reception and uplink transmission of the PCell, PSCell, and each of the SCells in FR1 for acquiring SFN of the reference cell in the E-UTRA OTDOA assistance data, while no autonomous gaps in downlink reception or uplink transmission are allowed in any of the UE serving cells in FR2. The UE, which are only supporting per-UE gaps, may make autonomous gaps in downlink reception and uplink transmission of the PCell, PSCell, and each of the SCells for acquiring the SFN of the reference cell in the E-UTRA OTDOA assistance data.

When the UE is not aware of and cannot derive the subframe timing difference between the NR serving cell and the OTDOA assistance data reference cell, the UE may need to request measurement gaps while indicating *eutra-FineTimingDetection* according to TS 38.331 [2] for detecting the reference cell in the E-UTRA OTDOA assistance data.

When the UE is performing one or both of SFN acquisition or cell detection as specified above, the UE shall be able to determine the timing of the E-UTRA OTDOA assistance data reference cell during the time period

$$T_{\text{RefCell, E-UTRAN}} = T_{\text{Detect, E-UTRAN TDD}} + T_{\text{MIB}} + T_{\text{ECGI}},$$

where

$T_{\text{Detect, E-UTRAN TDD}} = T_{\text{Identify, E-UTRAN TDD}} - T_{\text{measure, E-UTRAN TDD}}$ is according to clause 9.4.3 assuming $\text{CSSF}_{\text{InterRAT}}=1$ and it is the time needed to detect the E-UTRA OTDOA assistance data reference cell when the UE needs to acquire the subframe and slot timing of the cell, provided the UE is configured with measurement gaps ($T_{\text{Detect, E-UTRAN TDD}}=0$ when both *nr-LTE-SFN-Offset* and *nr-LTE-fineTiming-Offset* are provided in the E-UTRA OTDOA assistance data or the E-UTRA OTDOA assistance data reference cell is known to the UE), and

$T_{MIB} = 50$ ms is the time required to acquire SFN and/or PHICH configuration of the E-UTRA OTDOA assistance data reference cell provided the OTDOA assistance data reference cell is decodable and at least all E-UTRA subframes #0 during T_{MIB} are available at the UE receiver ($T_{MIB}=0$ when *nr-LTE-SFN-Offset* is provided in the E-UTRA OTDOA assistance data and ECGI acquisition is not needed), and

$T_{ECGI} = 100$ ms is the time required to acquire ECGI of the E-UTRA OTDOA assistance data reference cell when *cellGlobalId* is included in *OTDOA-ReferenceCellInfo* and the UE is not aware of the ECGI of this cell ($T_{ECGI} = 0$ when *cellGlobalId* is not included in *OTDOA-ReferenceCellInfo* or the UE is aware of the ECGI of the E-UTRA OTDOA assistance data reference cell).

When detecting the E-UTRAN OTDOA reference cell, the requirements in this clause shall be met, provided the conditions for the detectable cell are fulfilled according to clause 9.4.3.1. In addition, the MIB of the E-UTRA OTDOA reference cell whose SFN is acquired shall be considered decodable by the UE provided the PBCH demodulation requirements are met according to TS 36.101 [25].

The requirement for acquiring the timing of the E-UTRA OTDOA reference cell within $T_{RefCell,E-UTRAN}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [2] is used.

When $T_{MIB}>0$ and UE is using autonomous gaps during T_{MIB} , the UE shall transmit at least $N_{ACK/NACK, MIB, TDD}$ ACK/NACKs on PCell, PSCell, and each of activated SCell(s) in the frequency range where the autonomous gaps are created, specified in Table 9.4.4.2.2.2-1. When both $T_{MIB}>0$ and $T_{ECGI}>0$ and UE is using autonomous gaps during $T_{MIB}+T_{ECGI}$, the UE shall transmit on PCell, PSCell, and each of activated SCell(s) in the frequency range where autonomous gaps are created at least $N_{ACK/NACK, MIB+ECGI, TDD}$ ACK/NACKs specified in Table 9.4.4.2.2.2-3, provided the OTDOA reference cell bandwidth is configured in the OTDOA assistance data [22, 27]. The requirements in Tables 9.4.4.2.2.2-1, 9.4.4.2.2.2-2 and 9.4.4.2.2.2-3 apply, provided that:

- there is continuous DL data allocation,
- no DRX cycle is used,
- no measurement gaps are configured,
- only one code word is transmitted in each slot,
- 2 slot ACK/NACK feedback is configured,
- 20 ms SMTC period is configured,
- SSBs are transmitted in one slot within SMTC window.

Table 9.4.4.2.2.2-1: Minimum number of ACK/NACKs transmitted by the UE during T_{MIB}

$N_{ACK/NACK, MIB, TDD}$	Configuration of the serving cell in which the transmitted ACK/NACKs are counted	
	Duplex mode configuration	SCS
15	FDD	15 kHz
39	FDD	30 kHz
85	FDD	60 kHz
0	TDD ^{Note 1}	15 kHz
4	TDD ^{Note 1}	30 kHz
12	TDD ^{Note 1}	60 kHz
46	TDD ^{Note 2}	60 kHz
104	TDD ^{Note 2}	120 kHz

NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18].
NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].

Table 9.4.4.2.2.2-2: Void

Table 9.4.4.2.2.2-3: Minimum number of ACK/NACKs transmitted by the UE during $T_{MIB}+T_{ECGI}$

$N_{ACK/NACK, MIB+ECGI, TDD}$	Configuration of the serving cell in which the transmitted ACK/NACKs are counted	
	Duplex mode configuration	SCS

84	FDD	15 kHz
193	FDD	30 kHz
402	FDD	60 kHz
28	TDD ^{Note 1}	15 kHz
81	TDD ^{Note 1}	30 kHz
159	TDD ^{Note 1}	60 kHz
233	TDD ^{Note 2}	60 kHz
491	TDD ^{Note 2}	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18].		
NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

9.4.5 Inter-RAT E-CID measurements

9.4.5.1 NR–E-UTRAN FDD E-CID RSRP and RSRQ measurements

9.4.5.1.1 Introduction

The requirements in clause 9.4.5.1. shall apply provided the UE has received *ECID-RequestLocationInformation* message from LMF via LPP requesting the UE to report inter-RAT E-UTRAN FDD E-CID RSRP and RSRQ measurements [22, 27].

9.4.5.1.2 Requirements

The requirements in clause 9.4.2 also apply for this clause except the measurement reporting requirements. The measurement reporting requirements for E-CID RSRP and RSRQ are defined in clause 9.4.5.1.3.

9.4.5.1.3 Measurement Reporting Delay

This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

Reported RSRP and RSRQ measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.2.2 and 10.2.3, respectively.

9.4.5.2 NR–E-UTRAN TDD E-CID RSRP and RSRQ measurements

9.4.5.2.1 Introduction

The requirements in clause 9.4.5.2. shall apply provided the UE has received *ECID-RequestLocationInformation* message from LMF via LPP requesting the UE to report inter-RAT E-UTRAN TDD E-CID RSRP and RSRQ measurements [22, 27].

9.4.5.2.2 Requirements

The requirements in clause 9.4.3 also apply for this clause except the measurement reporting requirements. The measurement reporting requirements for E-CID RSRP and RSRQ are defined in clause 9.4.5.2.3.

9.4.5.2.3 Measurement Reporting Delay

This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

Reported RSRP and RSRQ measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.2.2 and 10.2.3, respectively.

9.4.6 NR – UTRAN FDD measurements

9.4.6.1 Introduction

The requirements are applicable for NR– UTRAN FDD CPICH RSCP and CPICH Ec/No measurements for SRVCC.

9.4.6.2 Requirements when no DRX is used

9.4.6.2.1 Identification of a new UTRA FDD cell

When explicit neighbour list is provided and no DRX is used, either measurement gaps are scheduled or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{\text{identify_UTRA_FDD}} = T_{\text{basic_identify_UTRA_FDD}} \cdot \frac{480}{T_{\text{inter1}}} \cdot CSSF_{\text{interRAT}} \quad ms$$

A cell shall be considered detectable when

- CPICH Ec/Io $\geq$ -20 dB,
- SCH_Ec/Io $\geq$ -17 dB for at least one channel tap and SCH_Ec/Ior is equally divided between primary synchronisation code and secondary synchronisation code. When L3 filtering is used an additional delay can be expected.

9.4.6.2.2 UE UTRA FDD CPICH measurement capability

When measurement gaps are scheduled for UTRA FDD inter RAT measurements, or the UE supports capability of conducting such measurements without gaps, the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in Clause 10 with measurement period given by

$$T_{\text{measurement_UTRA_FDD}} = \text{Max} \left\{ T_{\text{Measurement_Period_UTRA_FDD}} \cdot CSSF_{\text{interRAT}}, T_{\text{basic_measurement_UTRA_FDD}} \cdot \frac{480}{T_{\text{inter1}}} \cdot CSSF_{\text{interRAT}} \right\} ms$$

The UE shall be capable of performing UTRA FDD CPICH measurements for $X_{\text{basic_measurementUTRA_FDD}}$ inter-frequency cells per FDD frequency and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of $T_{\text{Measurement_UTRA_FDD}}$.

$$X_{\text{basic_measurement_UTRA_FDD}} = 6$$

$T_{\text{Measurement_Period_UTRA_FDD}} = 480$ ms. The period used for calculating the measurement period $T_{\text{measurement_UTRA_FDD}}$ for UTRA FDD CPICH measurements.

$T_{\text{basic_identify_UTRA_FDD}} = 300$ ms. This is the time period used in the inter RAT equation in clause 9.4.6.2.1 where the maximum allowed time for the UE to identify a new UTRA FDD cell is defined.

$T_{\text{basic_measurement_UTRA_FDD}} = 50$ ms. This is the time period used in the equation for defining the measurement period for inter RAT CPICH measurements.

$CSSF_{\text{interRAT}} = CSSF_{\text{within_gap},i}$ is the scaling factor for the measured inter-RAT UTRA carrier i which is calculated as specified in clause 9.1.5.2.

T_{inter1} is defined in clause 9.4.1.

9.4.6.2.3 Periodic Reporting

Reported measurements in periodically triggered measurement reports shall meet the requirements in clause 10.

9.4.6.2.4 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in clause 10.

The UE shall not send any event triggered measurement reports, as long as the reporting criteria is not fulfilled.

The measurement reporting delay is defined as the time between any event that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{\text{identify, UTRA_FDD}}$ defined in Clause 9.4.6.2.1 for the minimum requirements. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{\text{identify, UTRA_FDD}}$ defined in clause 9.4.6.2.1 for the minimum requirements and then triggers the measurement report as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{\text{measurement_UTRA_FDD}}$ defined in clause 9.4.6.2.2 provided the timing to that cell has not changed more than ± 32 chips while measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used, an additional delay can be expected.

9.4.6.2.5 Event-triggered Periodic Reporting

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in clause 10.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.4.6.2.4 Event Triggered Reporting.

9.4.6.3 Requirements when DRX is used

When explicit neighbour list is provided and DRX is used, either measurement gaps are scheduled or the UE supports capability of conducting such measurements without gaps, the UE shall be able to identify a new detectable cell belonging to the neighbour cell list within $T_{\text{identify, UTRA_FDD}}$ as shown in table 9.4.6.3-1

Table 9.4.6.3-1: Requirement to identify a newly detectable UTRA FDD cell

DRX cycle length (s)	$T_{\text{identify_UTRA_FDD}}$ (s) (DRX cycles)	
	Gap period = 40 ms	Gap period = 80 ms
≤ 0.04	Non DRX Requirements in clause 9.4.6.2 are applicable	Non DRX Requirements in clause 9.4.6.2 are applicable
0.064	$2.56 * \text{CSSF}_{\text{interRAT}}$ (40 * $\text{CSSF}_{\text{interRAT}}$)	$4.8 * \text{CSSF}_{\text{interRAT}}$ (75 * $\text{CSSF}_{\text{interRAT}}$)
0.08	$3.2 * \text{CSSF}_{\text{interRAT}}$ (40 * $\text{CSSF}_{\text{interRAT}}$)	$4.8 * \text{CSSF}_{\text{interRAT}}$ (60 * $\text{CSSF}_{\text{interRAT}}$)
0.128	$3.2 * \text{CSSF}_{\text{interRAT}}$ (25 * $\text{CSSF}_{\text{interRAT}}$)	$4.8 * \text{CSSF}_{\text{interRAT}}$ (37.5 * $\text{CSSF}_{\text{interRAT}}$)
0.16	$3.2 * \text{CSSF}_{\text{interRAT}}$ (20 * $\text{CSSF}_{\text{interRAT}}$)	$4.8 * \text{CSSF}_{\text{interRAT}}$ (30 * $\text{CSSF}_{\text{interRAT}}$)
$0.16 < \text{DRX-cycle} \leq 2.56$	Note1 (20 * $\text{CSSF}_{\text{interRAT}}$)	Note1 (20 * $\text{CSSF}_{\text{interRAT}}$)
Note 1: Time depends upon the DRX cycle in use. Note 2: $\text{CSSF}_{\text{interRAT}}$ is as defined in clause 9.4.2.2.		

A cell shall be considered detectable provided following conditions are fulfilled: A cell shall be considered detectable when

- CPICH $E_c/I_o \geq -20$ dB,
- SCH_ $E_c/I_o \geq -17$ dB for at least one channel tap and SCH_ E_c/I_o is equally divided between primary synchronisation code and secondary synchronisation code. When L3 filtering is used an additional delay can be expected.

The UE shall be capable of performing RSCP and E_c/I_o measurements of at least 6 UTRA cells per UTRA FDD carrier for up to 3 UTRA FDD carriers and the UE physical layer shall be capable of reporting RSCP and E_c/I_o measurements to higher layers with the measurement period defined in table 9.4.6.3-2 when DRX is used, either measurement gaps are scheduled or the UE supports capability of conducting such measurements without gaps.

Table 9.4.6.3-2: Requirement to measure UTRA FDD cells

DRX cycle length (s)	T _{measure_UTRA_FDD} (s) (DRX cycles)	
	Gap period = 40 ms	Gap period = 80 ms
≤ 0.04	Non DRX Requirements in clause 9.4.6.2 are applicable	Non DRX Requirements in clause 9.4.6.2 are applicable
0.064	$0.48 * CSSF_{interRAT}$ ($7.5 * N_{freq} * CSSF_{interRAT}$)	$0.8 * CSSF_{interRAT}$ ($12.5 * CSSF_{interRAT}$)
0.08	$0.48 * CSSF_{interRAT}$ ($6 * CSSF_{interRAT}$)	$0.8 * CSSF_{interRAT}$ (10 $* CSSF_{interRAT}$)
0.128	$0.64 * CSSF_{interRAT}$ ($5 * CSSF_{interRAT}$)	$0.8 * CSSF_{interRAT}$ (6.25 $* CSSF_{interRAT}$)
$0.128 < DRX\text{-}cycle \leq 2.56$	Note1 (5 $* CSSF_{interRAT}$)	Note1 (5 $* CSSF_{interRAT}$)
Note 1: Time depends upon the DRX cycle in use. Note 2: $CSSF_{interRAT}$ is as defined in clause 9.4.2.2.		

The measurement accuracy for all measured cells shall be as specified in the clause 10.3.

9.4.6.3.1 Periodic Reporting

Reported measurements in periodically triggered measurement reports shall meet the requirements in clause 10.

9.4.6.3.2 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in clause 10.

The UE shall not send any event triggered measurement reports, as long as the reporting criteria is not fulfilled.

The measurement reporting delay is defined as the time between any event that will trigger a measurement report until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than T_{identify,UTRA_FDD} defined in Clause 9.4.6.3. When L3 filtering is used an additional delay can be expected.

If a cell which has been detectable at least for the time period T_{identify,UTRA_FDD} defined in clause 9.4.6.3 and then triggers the measurement report as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than T_{measurement_UTRA_FDD} defined in clause 9.4.6.3 provided the timing to that cell has not changed more than ± 32 chips while measurement gap has not been available and the L3 filter has not been used. When L3 filtering is used, an additional delay can be expected.

9.4.6.3.3 Event-triggered Periodic Reporting

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in clause 10.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.4.6.3.2 Event Triggered Reporting.

9.4.7 NR – E-UTRAN measurements with autonomous gaps

9.4.7.1 CGI identification of an E-UTRA cell with autonomous gaps

The requirements in this clause apply when the UE is configured with standalone NR, NE-DC or NR-DC. The UE shall identify and report the CGI when requested by an NR PCell for the purpose ‘reportCGI’. The UE may make autonomous gaps in downlink reception and uplink transmission for receiving MIB and SIB1 message according to clause 5.5.3.1 in TS 38.331 [2]. If autonomous gaps are used for measurement with the purpose of ‘reportCGI’, regardless of whether DRX is used or not, or regardless of whether SCell(s) are configured or not, the UE shall be able to identify a new CGI of E-UTRA cell within $T_{\text{identify_CGI, E-UTRAN}} = 150$ ms. This is the maximum allowed time for the UE to identify a new CGI of an E-UTRA cell, provided that the E-UTRA cell has been already identified by the UE.

A cell shall be considered identifiable following conditions are fulfilled:

- RSRP related side conditions given in Clause 9.1 in [15] are fulfilled for a corresponding Band,
- SCH_{RP} and SCH_{Es}/lot according to Annex B.2.2 in [15] for a corresponding Band

The MIB of an E-UTRA cell whose CGI is identified shall be considered decodable by the UE provided the PBCH demodulation requirements are met according to [25].

The requirement for identifying a new CGI of an E-UTRA cell within $T_{\text{identify_CGI, E-UTRAN}}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [2] is used.

9.4.7.2 CGI reporting delay

The E-UTRA CGI reporting delay is defined as the time between a command that will trigger an E-UTRA CGI report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of $2 \times TTI_{\text{DCCH}}$ resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The CGI reporting delay shall be less than $T_{\text{identify_CGI, E-UTRAN}}$ plus RRC procedure delay defined in clause 12 in TS 38.331 [2], and an additional 30ms margin.

9.4A Inter-RAT measurements for RedCap

9.4A.1 Introduction

The requirements in this clause are specified for NR–E-UTRAN FDD and NR–E-UTRAN TDD measurements and are applicable without an explicit E-UTRAN neighbour cell list containing physical layer cell identities, for a UE:

- in RRC_CONNECTED state, and
- configured
 - with SA operation mode by PCell with NR–E-UTRAN FDD or TDD measurement (RSRP, RSRQ, RS-SINR) on E-UTRA non-serving frequency carrier, and
- configured with an appropriate measurement gap pattern according to Table 9.1A.2-1 and Table 9.1A.2-2.

Parameter $T_{\text{Inter1_RedCap}}$ used in inter-RAT requirements in clause 9.4A is specified in Table 9.4A.1-1.

Table 9.4A.1-1: Minimum available time for inter-RAT measurements

Gap Pattern Id	MeasurementGap Length (MGL, ms)	Measurement Gap Repetition Period (MGRP, ms)	Minimum available time for inter-frequency and inter-RAT measurements during 480 ms period (Tinter1_RedCap, ms)
0	6	40	60
1	6	80	30
2	3	40	24 ^{Note 1}
3	3	80	12 ^{Note 1}
4	6	20	120 ^{Note 1}
6	4	20	72 ^{Note 1,3,6}
7	4	40	36 ^{Note 1,4,6}
8	4	80	18 ^{Note 1,5,6}
10	3	20	48 ^{Note 1}
NOTE 1: When determining UE requirements using Tinter1_RedCap for gap pattern IDs 2, 3, 4, 6, 7, 8, 10, Tinter1_RedCap = 60 for gap pattern IDs 2, 4, 6, 7, 10, and Tinter1_RedCap = 30 for gap pattern IDs 3 and 8 shall be used. NOTE 2: Measurement gaps pattern configurations applicability is as specified in Table 9.1A.2-2. NOTE 3: When this gap pattern is used, the Tinter_RedCap for E-UTRA inter-frequency measurements is 48 ms corresponding to the first 3 ms of the 4 ms gap. NOTE 4: When this gap pattern is used, the Tinter_RedCap for E-UTRA inter-frequency measurements is 24 ms corresponding to the first 3 ms of the 4 ms gap. NOTE 5: When this gap pattern is used, the Tinter_RedCap for E-UTRA inter-frequency measurements is 12 ms corresponding to the first 3 ms of the 4 ms gap. NOTE 6: This gap pattern is applicable for E-UTRA inter-frequency measurements only if gap based NR measurements are also configured.			

A UE configured with gap pattern ID 2, 3 or 10 shall be able to detect a target cell, provided that

- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell begins not earlier than 500 μ s from the start of the measurement gap, and
- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell ends not later than 500 μ s before the end of the measurement gap in case of FDD and not later than 750 μ s before the end of measurement gap in case of TDD.

A UE configured with gap pattern ID 6, 7 or 8 shall be able to detect a target cell, provided that

- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell begins not earlier than 500 μ s from the start of the measurement gap, and
- the E-UTRA subframe #0 or #5 of the target E-UTRAN cell ends no later than 1500 μ s before the end of the measurement gap in case of FDD and no later than 1750 μ s before the end of measurement gap in case of TDD.

In this clause, the SSB terminology applies for both CD-SSB and NCD-SSB.

9.4A.2 NR – E-UTRAN FDD measurements

9.4A.2.1 Introduction

The requirements are applicable for NR–E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements.

In the requirements, an E-UTRAN FDD cell is considered to be detectable when:

- For 2 Rx RedCap UE:
 - RSRP related conditions in the accuracy requirements in clause 10.2.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],

- RSRQ related conditions in the accuracy requirements in clause 10.2.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
- RS-SINR related conditions in the accuracy requirements in clause 10.2.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.19 of TS 36.133 [15].
- For 1 Rx RedCap UE:
 - RSRP related conditions in the accuracy requirements in clause 10.2A.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
 - RSRQ related conditions in the accuracy requirements in clause 10.2A.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],

9.4A.2.2 Requirements when no DRX is used

When the UE requires measurement gaps to identify and measure inter-RAT cells and an appropriate measurement gap pattern is scheduled, the UE shall be able to identify a new detectable FDD cell within $T_{\text{Identify_RedCap, E-UTRAN FDD}}$ according to the following expression:

$$T_{\text{Identify_RedCap, E-UTRAN FDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1_RedCap}}} \cdot \text{CSSF}_{\text{interRAT_RedCap}} \quad \text{ms},$$

where:

$T_{\text{BasicIdentify}} = 480 \text{ ms}$,

$T_{\text{Inter1_RedCap}}$ is defined in clause 9.4A.1,

$\text{CSSF}_{\text{interRAT_RedCap}} = \text{CSSF}_{\text{within_gap_RedCap}, i}$ is the scaling factor for the measured inter-RAT E-UTRA carrier i which is calculated as specified in clause 9.1A.5.2.

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{\text{Measure_RedCap, E-UTRAN FDD}}$ defined in Table 9.4A.2.2-1 and Table 9.4A.2.2-2 for 2 Rx RedCap UE and 1 Rx RedCap UE, respectively.

Table 9.4A.2.2-1: Measurement period and measurement bandwidth for 2Rx RedCap UE

Configuration	Physical Layer Measurement period: $T_{\text{Measure_RedCap, E-UTRAN FDD}}$ [ms]	Measurement bandwidth [RB]
0	$480 \times \text{CSSF}_{\text{interRAT_RedCap}}$	6
1 (Note 1)	$240 \times \text{CSSF}_{\text{interRAT_RedCap}}$	50
NOTE 1: This configuration is optional.		

Table 9.4A.2.2-2: Measurement period and measurement bandwidth for 1Rx RedCap UE

Configuration	Physical Layer Measurement period: $T_{\text{Measure_RedCap, E-UTRAN FDD}}$ [ms]	Measurement bandwidth [RB]
0	$960 \times \text{CSSF}_{\text{interRAT_RedCap}}$	6
1 (Note 1)	$480 \times \text{CSSF}_{\text{interRAT_RedCap}}$	50
NOTE 1: This configuration is optional.		

The UE shall be capable of identifying and performing NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN FDD cells per E-UTRA FDD carrier frequency layer during each layer 1 measurement period, for up to 7 E-UTRA FDD carrier frequency layers.

If higher layer filtering is used, an additional cell identification delay can be expected.

For 2 Rx RedCap UE:

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2. The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3. The NR – E-UTRAN FDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

For 1 Rx RedCap UE:

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2A.2. The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2A.3.

9.4A.2.3 Requirements when DRX is used

When DRX is in use and measurement gaps are configured, the UE shall be able to identify a new detectable E-UTRAN FDD cell within $T_{\text{Identify_RedCap, E-UTRAN FDD}}$ specified in Table 9.4A.2.3-1.

Table 9.4A.2.3-1: Requirement to identify a newly detectable E-UTRAN FDD cell

DRX cycle length (s)	$T_{\text{Identify_RedCap, E-UTRAN FDD}}$ (s) (DRX cycles)	
	Gap period = 40 ms, 20 ms	Gap period = 80 ms
≤ 0.16	Non-DRX requirements in clause 9.4A.2.2 apply	Non-DRX requirements in clause 9.4A.2.2 apply
0.256	$5.12 * \text{CSSF}_{\text{interRAT_RedCap}} (20 * \text{CSSF}_{\text{interRAT_RedCap}})$	$7.68 * \text{CSSF}_{\text{interRAT_RedCap}} (30 * \text{CSSF}_{\text{interRAT_RedCap}})$
0.32	$6.4 * \text{CSSF}_{\text{interRAT_RedCap}} (20 * \text{CSSF}_{\text{interRAT_RedCap}})$	$7.68 * \text{CSSF}_{\text{interRAT_RedCap}} (24 * \text{CSSF}_{\text{interRAT_RedCap}})$
$0.32 < \text{DRX-cycle} \leq 10.24$	Note1 ($20 * \text{CSSF}_{\text{interRAT_RedCap}}$)	Note1 ($20 * \text{CSSF}_{\text{interRAT_RedCap}}$)
NOTE 1: The time depends on the DRX cycle length.		
NOTE 2: $\text{CSSF}_{\text{interRAT_RedCap}}$ is as defined in clause 9.4A.2.2.		

When DRX is in use, the UE shall be capable of performing NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN FDD cells per E-UTRA FDD frequency layer during each layer 1 measurement period, for up to 7 E-UTRA FDD carrier frequency layers, and the UE physical layer shall be capable of reporting NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements to higher layers with the measurement period $T_{\text{measure_RedCap, E-UTRAN FDD}}$ specified in Table 9.4A.2.3-2 and Table 9.4A.2.3-3.

Table 9.4A.2.3-2: Requirement to measure E-UTRAN FDD cells for 2Rx RedCap UE

DRX cycle length (s)	$T_{\text{measure_RedCap, E-UTRAN FDD}}$ (s) (DRX cycles)
≤ 0.08	Non-DRX requirements in clause 9.4A.2.2 apply
$0.08 < \text{DRX-cycle} \leq 10.24$	Note1 ($5 * \text{CSSF}_{\text{interRAT_RedCap}}$)
NOTE 1: The time depends on the DRX cycle length.	
NOTE 2: $\text{CSSF}_{\text{interRAT_RedCap}}$ is as defined in clause 9.4A.2.2.	

Table 9.4A.2.3-3: Requirement to measure E-UTRAN FDD cells for 1Rx RedCap UE

DRX cycle length (s)	$T_{\text{measure_RedCap, E-UTRAN FDD}}$ (s) (DRX cycles)
≤ 0.08	Non-DRX requirements in clause 9.4A.2.2 apply
$0.08 < \text{DRX-cycle} \leq 10.24$	Note1 ($10 * \text{CSSF}_{\text{interRAT_RedCap}}$)
NOTE 1: The time depends on the DRX cycle length.	
NOTE 2: $\text{CSSF}_{\text{interRAT_RedCap}}$ is as defined in clause 9.4A.2.2.	

If higher layer filtering is used, an additional cell identification delay can be expected.

For 2 Rx RedCap UE:

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2. The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3. The NR – E-UTRAN FDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

For 1 Rx RedCap UE:

The NR – E-UTRAN FDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2A.2. The NR – E-UTRAN FDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2A.3.

9.4A.2.4 Measurement reporting requirements

9.4A.2.4.1 Periodic Reporting

For 2 Rx RedCap UE: The requirements in clause 9.4.2.4.1 shall apply.

For 1 Rx RedCap UE: The reported NR – E-UTRAN FDD RSRP and RSRQ measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.2A.2 and 10.2A.3, respectively.

9.4A.2.4.2 Event-Triggered Periodic Reporting

For 2 Rx RedCap UE: The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

For 1 Rx RedCap UE: The reported NR – E-UTRAN FDD RSRP and RSRQ measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.2A.2 and 10.2A.3, respectively.

The first report in event-triggered periodic measurement reporting shall meet the requirements specified in clause 9.4A.2.4.3.

9.4A.2.4.3 Event-Triggered Reporting

For 2 Rx RedCap UE: The reported NR – E-UTRAN FDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

For 1 Rx RedCap UE: The reported NR – E-UTRAN FDD RSRP and RSRQ measurements contained in event-triggered measurement reports shall meet the requirements in clauses 10.2A.2 and 10.2A.3, respectively.

The UE shall not send any event-triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times T_{\text{TI}_{\text{DCCH}}}$ where $T_{\text{TI}_{\text{DCCH}}}$ is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{\text{Identify_RedCap, E-UTRAN FDD}}$ defined in clauses 9.4A.2.2 and 9.4A.2.3 without DRX and with DRX, respectively. When L3 filtering is used, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{\text{Identify_RedCap, E-UTRAN FDD}}$ becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{\text{Measure_RedCap, E-UTRAN FDD}}$ provided the timing to that cell has not changed more than $\pm 50 T_s$ while measurement gap has not been available and the L3 filter has not been used.

9.4A.3 NR – E-UTRAN TDD measurements

9.4A.3.1 Introduction

The requirements are applicable for NR–E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements.

In the requirements, an E-UTRAN TDD cell is considered to be detectable when:

- For 2 Rx RedCap UE:
 - RSRP related conditions in the accuracy requirements in clause 10.2.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
 - RSRQ related conditions in the accuracy requirements in clause 10.2.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
 - RS-SINR related conditions in the accuracy requirements in clause 10.2.5 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.19 of TS 36.133 [15].
- For 1 Rx RedCap UE:
 - RSRP related conditions in the accuracy requirements in clause 10.2A.2 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],
 - RSRQ related conditions in the accuracy requirements in clause 10.2A.3 are fulfilled for a corresponding Band, together with the corresponding side conditions in Annex B.2.3 and Annex B.3.3 of TS 36.133 [15],

9.4A.3.2 Requirements when no DRX is used

When the UE requires measurement gaps to identify and measure inter-RAT cells and an appropriate measurement gap pattern is scheduled, the UE shall be able to identify a new detectable TDD cell within $T_{\text{Identify_RedCap, E-UTRAN TDD}}$ according to the following expression:

- When configuration 0 or configuration 1 in Table 9.4A.3.2-1 is applied,

$$T_{\text{Identify_RedCap, E-UTRAN TDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1_RedCap}}} \cdot \text{CSSF}_{\text{interRAT_RedCap}} \quad \text{ms},$$

- When configuration 2 or configuration 3 in Table 9.4A.3.2-1 is applied,

$$T_{\text{Identify_RedCap, E-UTRAN TDD}} = T_{\text{BasicIdentify}} \cdot \frac{480}{T_{\text{Inter1_RedCap}}} \cdot \text{CSSF}_{\text{interRAT_RedCap}} + 240 \cdot \text{CSSF}_{\text{interRAT_RedCap}} \quad \text{ms},$$

where:

$T_{\text{BasicIdentify}} = 480 \text{ ms}$,

$T_{\text{Inter1_RedCap}}$ is defined in clause 9.4A.1,

$\text{CSSF}_{\text{interRAT_RedCap}} = \text{CSSF}_{\text{within_gap_RedCap, } i}$ is the scaling factor for the measured inter-RAT E-UTRA carrier i which is calculated as specified in clause 9.1A.5.2.

Identification of a cell shall include detection of the cell and additionally performing a single measurement with measurement period of $T_{\text{Measure_RedCap, E-UTRAN TDD}}$ defined in Table 9.4A.3.2-1 and Table 9.4A.3.2-2 for 2 Rx RedCap UE and 1 Rx RedCap UE, respectively.

Table 9.4A.3.2-1: $T_{\text{Measure_RedCap, E-UTRAN TDD}}$ for different configurations for 2Rx RedCap UE

Configuration	Measurement bandwidth (RB)	Number of UL/DL sub-frames per half frame (5 ms)		DwPTS		$T_{\text{Measure_RedCap, E-UTRAN TDD}} \text{ (ms)}$
		DL	UL	Normal CP	Extended CP	
0	6	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	$480 \times \text{CSSF}_{\text{interRAT_RedCap}}$
1 (Note 1)	50	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	$240 \times \text{CSSF}_{\text{interRAT_RedCap}}$
2	6	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	$720 \times \text{CSSF}_{\text{interRAT_RedCap}}$

3 (Note 1)	50	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	$480 \times \text{CSSF}_{\text{interRAT_RedCap}}$
NOTE 1: This configuration is optional.						

Table 9.4A.3.2-2: $T_{\text{Measure_RedCap}}$, E-UTRAN TDD for different configurations for 1Rx RedCap UE

Configuration	Measurement bandwidth (RB)	Number of UL/DL sub-frames per half frame (5 ms)		DwPTS		$T_{\text{Measure_RedCap}}$, E-UTRAN TDD (ms)
		DL	UL	Normal CP	Extended CP	
0	6	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	$960 \times \text{CSSF}_{\text{interRAT_RedCap}}$
1 (Note 1)	50	2	2	$19760 \cdot T_s$	$20480 \cdot T_s$	$480 \times \text{CSSF}_{\text{interRAT_RedCap}}$
2	6	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	$1440 \times \text{CSSF}_{\text{interRAT_RedCap}}$
3 (Note 1)	50	1	3	$19760 \cdot T_s$	$20480 \cdot T_s$	$960 \times \text{CSSF}_{\text{interRAT_RedCap}}$
NOTE 1: This configuration is optional.						

The UE shall be capable of identifying and performing NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN TDD cells per E-UTRA TDD carrier frequency layer during each layer 1 measurement period, for up to 7 E-UTRA TDD carrier frequency layers.

If higher layer filtering is used, an additional cell identification delay can be expected.

For 2 Rx RedCap UE:

- The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2. The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3. The NR – E-UTRAN TDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

For 1 Rx RedCap UE:

- The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2A.2. The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2A.3.

9.4A.3.3 Requirements when DRX is used

When DRX is in use and measurement gaps are configured, the UE shall be able to identify a new detectable E-UTRAN TDD cell within $T_{\text{Identify_RedCap}}$, E-UTRAN TDD specified in Table 9.4A.3.3-1.

Table 9.4A.3.3-1: Requirement to identify a newly detectable E-UTRAN TDD cell

DRX cycle length (s)	$T_{\text{Identify_RedCap}}$, E-UTRAN TDD (s) (DRX cycles)	
≤ 0.16	Gap period = 40 ms, 20 ms	Gap period = 80 ms
	Non-DRX requirements in clause 9.4A.3.2 apply	Non-DRX requirements in clause 9.4A.3.2 apply
0.256	$5.12 \times \text{CSSF}_{\text{interRAT_RedCap}}$ ($20 \times \text{CSSF}_{\text{interRAT_RedCap}}$)	$7.68 \times \text{CSSF}_{\text{interRAT_RedCap}}$ ($30 \times \text{CSSF}_{\text{interRAT_RedCap}}$)
0.32	$6.4 \times \text{CSSF}_{\text{interRAT_RedCap}}$ ($20 \times \text{CSSF}_{\text{interRAT_RedCap}}$)	$7.68 \times \text{CSSF}_{\text{interRAT_RedCap}}$ ($24 \times \text{CSSF}_{\text{interRAT_RedCap}}$)
$0.32 < \text{DRX-cycle} \leq 10.24$	Note1 ($20 \times \text{CSSF}_{\text{interRAT_RedCap}}$)	Note1 ($20 \times \text{CSSF}_{\text{interRAT_RedCap}}$)
NOTE 1: The time depends on the DRX cycle length.		
NOTE 2: $\text{CSSF}_{\text{interRAT_RedCap}}$ is as defined in clause 9.4A.3.2.		

When DRX is in use, the UE shall be capable of performing NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements of at least 4 identified E-UTRAN TDD cells per E-UTRA TDD frequency layer during each layer 1 measurement period, for up to 7 E-UTRA TDD carrier frequency layers, and the UE physical layer shall be capable of reporting NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements to higher layers with the measurement period $T_{\text{measure_RedCap, E-UTRAN TDD}}$ specified in Table 9.4A.3.3-2 and Table 9.4A.3.3-3 for 2 Rx RedCap UE and 1 Rx RedCap UE, respectively.

Table 9.4A.3.3-2: Requirement to measure E-UTRAN TDD cells for 2Rx RedCap UE

DRX cycle length (s)	$T_{\text{measure_RedCap, E-UTRAN TDD}}$ (s) (DRX cycles)
≤ 0.08	Non-DRX Requirements in clause 9.4A.3.2 apply
0.128	For configuration 2 ^{Note3} , non-DRX requirements in clause 9.4A.3.2 apply, Otherwise: Note1 ($5 \cdot \text{CSSF}_{\text{interRAT_RedCap}}$)
$0.128 < \text{DRX-cycle} \leq 10.24$	Note1 ($5 \cdot \text{CSSF}_{\text{interRAT_RedCap}}$)
NOTE 1: The time depends on the DRX cycle length.	
NOTE 2: $\text{CSSF}_{\text{interRAT_RedCap}}$ is as defined in clause 9.4A.3.2.	
NOTE 3: See Table 9.4A.3.2-1.	

Table 9.4A.3.3-3: Requirement to measure E-UTRAN TDD cells for 1Rx RedCap UE

DRX cycle length (s)	$T_{\text{measure_RedCap, E-UTRAN TDD}}$ (s) (DRX cycles)
≤ 0.08	Non-DRX Requirements in clause 9.4A.3.2 apply
0.128	For configuration 2 ^{Note3} , non-DRX requirements in clause 9.4A.3.2 apply, Otherwise: Note1 ($5 \cdot \text{CSSF}_{\text{interRAT_RedCap}}$)
$0.128 < \text{DRX-cycle} \leq 10.24$	Note1 ($10 \cdot \text{CSSF}_{\text{interRAT_RedCap}}$)
NOTE 1: The time depends on the DRX cycle length.	
NOTE 2: $\text{CSSF}_{\text{interRAT_RedCap}}$ is as defined in clause 9.4A.3.2.	
NOTE 3: See Table [9.4A.3.2-1].	

If higher layer filtering is used, an additional cell identification delay can be expected.

For 2 Rx RedCap UE:

- The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2.2. The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2.3. The NR – E-UTRAN TDD RS-SINR measurement accuracy for all measured cells shall be as specified in clause 10.2.5.

For 1 Rx RedCap UE:

- The NR – E-UTRAN TDD RSRP measurement accuracy for all measured cells shall be as specified in clause 10.2A.2. The NR – E-UTRAN TDD RSRQ measurement accuracy for all measured cells shall be as specified in clause 10.2A.3.

9.4A.3.4 Measurement reporting requirements

9.4A.3.4.1 Periodic Reporting

For 2 Rx RedCap UE: The requirements in clause 9.4.3.4.1 shall apply.

For 1 Rx RedCap UE: The reported NR – E-UTRAN TDD RSRP and RSRQ measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.2A.2 and 10.2A.3, respectively.

9.4A.3.4.2 Event-Triggered Periodic Reporting

For 2 Rx RedCap UE: The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

For 1 Rx RedCap UE: The reported NR – E-UTRAN TDD RSRP and RSRQ measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.2A.2 and 10.2A.3, respectively.

The first report in event-triggered periodic measurement reporting shall meet the requirements specified in clause 9.4A.3.4.3.

9.4A.3.4.3 Event-Triggered Reporting

For 2 Rx RedCap UE: The reported NR – E-UTRAN TDD RSRP, RSRQ, and RS-SINR measurements contained in event-triggered measurement reports shall meet the requirements in clauses 10.2.2, 10.2.3, and 10.2.5, respectively.

For 1 Rx RedCap UE: The reported NR – E-UTRAN TDD RSRP and RSRQ measurements contained in event-triggered measurement reports shall meet the requirements in clauses 10.2A.2 and 10.2A.3, respectively.

The UE shall not send any event-triggered measurement reports as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times T_{TI_{DCCH}}$ where $T_{TI_{DCCH}}$ is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than $T_{Identify_RedCap, E-UTRAN TDD}$ defined in clauses 9.4A.3.2 and 9.4A.3.3 without DRX and with DRX, respectively. When L3 filtering is used, an additional delay can be expected.

If a cell which has been detectable at least for the time period $T_{Identify_RedCap, E-UTRAN TDD}$ becomes undetectable for a period ≤ 5 seconds and then the cell becomes detectable again and triggers an event as per TS 38.331 [2], the event triggered measurement reporting delay shall be less than $T_{Measure_RedCap, E-UTRAN TDD}$ provided the timing to that cell has not changed more than $\pm 50 T_s$ while measurement gap has not been available and the L3 filter has not been used.

9.4A.4 NR – E-UTRAN measurements with autonomous gaps

9.4A.4.1 CGI identification of an E-UTRA cell with autonomous gaps

The requirements in this clause apply when the 1Rx RedCap UE or 2Rx RedCap UE is configured with standalone NR. The UE shall identify and report the CGI when requested by an NR PCell for the purpose ‘reportCGI’. The UE may make autonomous gaps in downlink reception and uplink transmission for receiving MIB and SIB1 message according to clause 5.5.3.1 in TS 38.331 [2].

For 2Rx RedCap UE: If autonomous gaps are used for measurement with the purpose of ‘reportCGI’, the UE shall be able to identify a new CGI of E-UTRA cell within $T_{identify_CGI_RedCap, E-UTRAN} = 150$ ms.

For 1Rx RedCap UE: If autonomous gaps are used for measurement with the purpose of ‘reportCGI’, the UE shall be able to identify a new CGI of E-UTRA cell within $T_{identify_CGI_RedCap, E-UTRAN} = 190$ ms.

This is the maximum allowed time for the UE to identify a new CGI of an E-UTRA cell, provided that the E-UTRA cell has been already identified by the UE.

A cell shall be considered identifiable following conditions are fulfilled:

- RSRP related side conditions given in Clause 9.1 in [15] are fulfilled for a corresponding Band,
- SCH_RP and $SCH\ \hat{E}_s/I_{ot}$ according to Annex B.2.2 in [15] for a corresponding Band

The MIB of an E-UTRA cell whose CGI is identified shall be considered decodable by the UE provided the PBCH demodulation requirements are met according to [25].

The requirement for identifying a new CGI of an E-UTRA cell within $T_{\text{identify_CGI_RedCap, E-UTRAN}}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [2] is used.

9.4A.4.2 CGI reporting delay

The E-UTRA CGI reporting delay is defined as the time between a command that will trigger an E-UTRA CGI report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of $2 \times T_{\text{TI_DCCH}}$ resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The CGI reporting delay shall be less than $T_{\text{identify_CGI_RedCap, E-UTRAN}}$ plus RRC procedure delay defined in clause 12 in TS 38.331 [2], and an additional 30ms margin.

9.4A.4.3 CGI reporting scheduling restriction

When a UE is identifying CGI of an E-UTRA FDD cell or E-UTRA TDD cell with autonomous gaps, within time period $T_{\text{identify_CGI_RedCap, E-UTRA}}$ specified in clause 9.4A.4.1, the UE shall be able to transmit at least the number of ACK/NACKs specified in Table 9.4A.4.3-1 on PCell in the frequency range where autonomous gaps are used, provided that:

- there is continuous DL data allocation,
- no DRX cycle is used,
- no measurement gaps are configured,
- only one code word is transmitted in each slot,
- 2 slot ACK/NACK feedback is configured,
- 20 ms SMTC period is configured.

Table 9.4A.4.3-1: Minimum number of ACK/NACKs transmitted by the UE during $T_{\text{identify_CGI_RedCap, E-UTRAN}}$

Minimum number of transmitted ACK/NACKs	SCS	
	Duplex mode configuration	SCS
	Duplex mode configuration	SCS
84	FDD	15 kHz
193	FDD	30 kHz
402	FDD	60 kHz
28	TDD ^{Note 1}	15 kHz
81	TDD ^{Note 1}	30 kHz
159	TDD ^{Note 1}	60 kHz
233	TDD ^{Note 2}	60 kHz
491	TDD ^{Note 2}	120 kHz
NOTE 1: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-1 [18].		
NOTE 2: TDD UL-DL configuration is as specified in Table A.3.3.1-1 of TS 38.101-2 [19].		

9.5 L1-RSRP measurements for Reporting

9.5.1 Introduction

When configured by the network, the UE shall be able to perform L1-RSRP measurements of configured CSI-RS, SSB or CSI-RS and SSB resources for L1-RSRP. The measurements shall be performed for a serving cell, including PCell, PSCell, or SCell, on the resources configured for L1-RSRP measurements within the active BWP.

The UE shall be able to measure all CSI-RS resources and/or SSB resources of the *nzp-CSI-RS-ResourceSet* and/or *csi-SSB-ResourceSet* within the *CSI-ResourceConfig* settings configured for L1-RSRP for the active BWP, provided that the number of resources, including the number of SSB resources of the cell with PCI different from serving cell configured for L1-RSRP measurements in 9.13, does not exceed the UE capability indicated by *beamManagementSSB-CSI-RS*.

The UE shall report the measurement quantity (*reportQuantity*) and send periodic, semi-persistent or aperiodic reports, according to the *reportConfigType* according to the CSI reporting configuration(s) (*CSI-ReportConfig*) for the active BWP.

9.5.2 Requirements applicability

The requirements in clause 9.5 apply, provided:

- The CSI-RS or SSB or CSI-RS and SSB resources configured for L1-RSRP measurements are measurable.

An SSB resource configured for L1-RSRP shall be considered measurable when for each relevant SSB the following conditions are met:

- L1-RSRP related side conditions given in clauses 10.1.19.1 and 10.1.20.1 for FR1 and FR2, respectively, for a corresponding band,
- SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.4.1 for a corresponding band.

A CSI-RS resource configured for L1-RSRP shall be considered measurable when for each relevant CSI-RS the following conditions are met:

- L1-RSRP related side conditions given in clauses 10.1.19.2 and 10.1.20.2 for FR1 and FR2, respectively, for a corresponding band,
- CSI-RS_{RP} and CSI-RS $\hat{E}_s/I_{ot}$ according to Annex B.2.4.2 for a corresponding band.

A CSI-RS and SSB resource configured for L1-RSRP shall be considered measurable when the measurable resource conditions are met for both CSI-RS resource and SSB resource.

Requirements are defined for periodic, semi-persistent and aperiodic resources.

In case the SSB resources configured for L1-RSRP measurements outside SMTCs are overlapped with the PDSCH/PDCCH that is associated to a PCI different from serving cell, L1-RSRP measurement performance degradation is expected.

9.5.3 Measurement Reporting Requirements

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.19 for FR1 and 10.1.20 for FR2 if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-RSRP based reporting as defined in clause 10.1.19 for FR1 and 10.1.20 for FR2. The differential L1-RSRP is quantized to a 4-bit value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in 10.1.6.

In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

9.5.3.1 Periodic Reporting

Reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send periodic L1-RSRP measurement reports for an active BWP.

The UE shall transmit the periodic L1-RSRP reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.5.3.2 Semi-Persistent Reporting

Reported L1-RSRP measurements contained in a Semi-Persistent L1-RSRP measurement report shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively. This requirement applies for semi-persistent L1-RSRP reports send on PUSCH or PUCCH.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUSCH, if a DCI request has been received.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUCCH, if an activation command [7] has been received.

The UE shall transmit the semi-persistent L1-RSRP reporting on PUSCH or PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.5.3.3 Aperiodic Reporting

Reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send aperiodic L1-RSRP measurement reports, if a DCI trigger has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-RSRP reporting on PUSCH over the air interface at the time specified according to clause 6.1.2.1 in TS 38.214 [26].

9.5.4 L1-RSRP measurement requirements

9.5.4.1 SSB based L1-RSRP Reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{\text{L1-RSRP_Measurement_Period_SSB}}$.

The value of $T_{\text{L1-RSRP_Measurement_Period_SSB}}$ is defined in Table 9.5.4.1-1 for FR1. The value of $T_{\text{L1-RSRP_Measurement_Period_SSB}}$ is defined in Table 9.5.4.1-2 for FR2 when *highSpeedMeasFlagFR2-r17* is not configured, and defined in Table 9.5.4.1-3 for FR2 power class 6 UE when *highSpeedMeasFlagFR2-r17* is configured, where

- $M=1$ if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and $M=3$ otherwise
- $N=8$ in Table 9.5.4.1-2 and Table 9.5.4.1-3.

For a UE supporting *concurrentMeasGap-r17* and when concurrent gaps are configured,

- P value for SSB resource to be measured is defined as
 - $N_{\text{total}} / N_{\text{outside_MG}}$ in FR1
 - $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ in FR2 with $N_{\text{available}} = 0$

- $N_{\text{total}} / N_{\text{available}}$ in FR2 with $N_{\text{available}} > 0$
- For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any SSB resource occasion:
 - N_{total} is the total number of SSB resource occasions within the window W , including those overlapped with measurement gap occasions or SMTC occasions within the window W , and
 - $N_{\text{outside_MG}}$ is the number of SSB resource occasions that are not overlapped with any measurement gap occasion within the window W
 - $N_{\text{available}}$ is the number of SSB resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W
 - T_{L1} is periodicity of the target SSB.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{xRP}}$, when in the monitored cell there are GAPS configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB; and
- $P=1$ when in the monitored cell there are no GAPS overlapping with any occasion of the SSB.

For FR2,

- $P_1 = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when SSB is not overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$).
- P is $P_{L1_sharing} * P_{\text{sharing factor}}$, when SSB is not overlapped with measurement gap and SSB is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$).
- $P_1 = \frac{1}{1 - \frac{T_{\text{SSB}}}{xRP} \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when SSB is partially overlapped with GAP and SSB is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with GAP and
 - $T_{\text{SMTCperiod}} \neq xRP$ or
 - $T_{\text{SMTCperiod}} = xRP$ and $T_{\text{SSB}} < 0.5 * T_{\text{SMTCperiod}}$
- P_1 is $\frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{xRP}}$, when SSB is partially overlapped with GAP and SSB is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with GAP and $T_{\text{SMTCperiod}} = xRP$ and $T_{\text{SSB}} = 0.5 * T_{\text{SMTCperiod}}$
- $P_1 = \frac{1}{1 - \frac{T_{\text{SSB}}}{\min(T_{\text{SMTCperiod}}, xRP)}}$, when SSB is partially overlapped with GAP ($T_{\text{SSB}} < xRP$) and SSB is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with GAP.
- P is $P_{L1_sharing} * \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{xRP}}$, when SSB is partially overlapped with measurement gap and SSB is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with GAP ($T_{\text{SMTCperiod}} < xRP$)
- If SSB resource from the cell with different PCI is configured for L1-RSRP measurement, and P_2 is valid according to 9.13.4.1, and any symbol of the SSBs from serving cell and cell with different PCI are overlapping or adjacent (in time domain)

- $P = \frac{P_1}{1 - \frac{P_1 * T_{SSB}}{P_2 * T_{SSB_CDP}}}$, if $P_1 * T_{SSB} < P_2 * T_{SSB_CDP}$.
- $P = P_1$, if $P_1 * T_{SSB} > P_2 * T_{SSB_CDP}$.
- $P = 2 * P_1$, if $P_1 * T_{SSB} = P_2 * T_{SSB_CDP}$.
- Otherwise, $P = P_1$

Where:

- T_{SSB} = ssb-periodicityServingCell of the serving cell
- $T_{SMTCperiod}$ = the configured SMTC period
- T_{SSB_CDP} = SSB periodicity of the cell with PCI different from serving cell
- $P_{sharing\ factor} = 1$, if the SSB configured for L1-RSRP measurement outside gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
 - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{sharing\ factor} = 3$, otherwise.
- $P_{L1_sharing} = 2$, if SSB resource from the cell with different PCI is configured for L1-RSRP measurement, and $P_{sharing_factor,CDP}$ is used in 9.13.4.1, and any symbol of the SSBs from serving cell and cell with different PCI are overlapping or adjacent (in time domain). $P_{L1_sharing} = 1$, otherwise.
 - $T_{SSB} = ssb-periodicityServingCell$
 - $T_{SMTCperiod} =$ the configured SMTC period
- If the UE is configured with Pre-MG, an SSB or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.
- When a measurement gap is configured and the measurement gap is not NCSG,
 - an SSB or an SMTC occasion is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and
 - $xRP = MGRP$
- Otherwise, when NCSG measurement gap is configured,
 - an SSB or an SMTC occasion is considered to be overlapped with the GAP if
 - it overlaps the VIL1 or VIL2 of NCSG, or
 - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,
 - and
 - $xRP = VIRP$
- When concurrent gaps are configured, an SSB or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to clause 9.1.8.

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{\text{SMTCPERIOD}}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{\text{SMTCPERIOD}}$ corresponds to the value of higher layer parameter *smtc1*. $T_{\text{SMTCPERIOD}}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and GAP configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer L1 RSRP measurement period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

Table 9.5.4.1-1: Measurement period $T_{\text{L1-RSRP_Measurement_Period_SSB}}$ for FR1

Configuration	$T_{\text{L1-RSRP_Measurement_Period_SSB}}$ (ms)
non-DRX	$\max(T_{\text{Report}}, \text{ceil}(M \cdot P) \cdot T_{\text{SSB}})$
DRX cycle $\leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(K \cdot M \cdot P) \cdot \max(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M \cdot P) \cdot T_{\text{DRX}}$
Note 1:	$T_{\text{SSB}} = \text{ssb-periodicityServingCell}$ is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.
Note 2:	$K = 1$ when $T_{\text{SSB}} \leq 40\text{ ms}$ and <i>highSpeedMeasFlag-r16</i> or <i>highSpeedMeasCA-Scell-r17</i> are configured; otherwise $K = 1.5$.
Note 3:	When <i>highSpeedMeasFlag-r16</i> is configured, the requirements apply only to UE supporting either <i>measurementEnhancement-r16</i> or <i>intraNR-MeasurementEnhancement-r16</i> . or <i>measurementEnhancementCA-r17</i>

Table 9.5.4.1-2: Measurement period $T_{\text{L1-RSRP_Measurement_Period_SSB}}$ for FR2

Configuration	$T_{\text{L1-RSRP_Measurement_Period_SSB}}$ (ms)
non-DRX	$\max(T_{\text{Report}}, \text{ceil}(M \cdot P \cdot N) \cdot T_{\text{SSB}})$
DRX cycle $\leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot \max(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot T_{\text{DRX}}$
Note:	$T_{\text{SSB}} = \text{ssb-periodicityServingCell}$ is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.

Table 9.5.4.1-3: Measurement period $T_{\text{L1-RSRP_Measurement_Period_SSB}}$ configured with *highSpeedMeasFlagFR2-r17* for FR2

Configuration	$T_{\text{L1-RSRP_Measurement_Period_SSB}}$ (ms)
non-DRX	$\max(T_{\text{Report}}, \text{ceil}(M \cdot P \cdot N1^{\text{Note2}}) \cdot T_{\text{SSB}})$
DRX cycle $\leq 80\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(M \cdot P \cdot N1^{\text{Note2}} \cdot M2) \cdot \max(T_{\text{DRX}}, T_{\text{SSB}}))$
$80\text{ms} < \text{DRX cycle} \leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot \max(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot T_{\text{DRX}}$
Note1:	$T_{\text{SSB}} = \text{ssb-periodicityServingCell}$ is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.
Note 2:	$N1 = 2$ when <i>highSpeedMeasFlagFR2-r17</i> = set1; $N1 = 6$ when <i>highSpeedMeasFlagFR2-r17</i> = set2.
Note 3:	$M2 = 1.5$ if SMTC periodicity $> 40\text{ ms}$; otherwise $M2 = 1$

9.5.4.2 CSI-RS based L1-RSRP Reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured CSI-RS resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$.

The value of $T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$ is defined in Table 9.5.4.2-1 for FR1 and in Table 9.5.4.2-2 for FR2, where

- For periodic and semi-persistent CSI-RS resources, $M=1$ if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and $M=3$ otherwise
- For aperiodic CSI-RS resources $M=1$
- For periodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, $N=1$. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with
 - SSB for L1-RSRP measurement, or
 - another CSI-RS in resource set configured with repetition ON.
- For periodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, $N=\text{ceil}(\text{maxNumberRxBeam} / N_{\text{res_per_set}})$, where $N_{\text{res_per_set}}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured with QCL-TypeD for all resources in the resource set.
- For semi-persistent CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, $N=1$. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource one RS has QCL-TypeD with
 - SSB for L1-RSRP measurement, or
 - another CSI-RS in resource set configured with repetition ON.
- For semi-persistent CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, $N=\text{ceil}(\text{maxNumberRxBeam} / N_{\text{res_per_set}})$, where $N_{\text{res_per_set}}$ is number of resources in the resource set. The requirements apply provided TCI state is provided with QCL-TypeD for all resources in the resource set in the MAC CE activating the resource set.
- For aperiodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, $N=1$. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource one RS has QCL-TypeD with
 - SSB for L1-RSRP measurement, or
 - another CSI-RS in resource set configured with repetition ON.
- For aperiodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, $N=1$. UE is not required to meet the accuracy requirements in clause 10.1.19.2 and 10.1.20.2 if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured with QCL-TypeD for all resources in the resource set.

For a UE supporting *concurrentMeasGap-r17* and when concurrent gaps are configured,

- P value for a CSI-RS resource to be measured is defined as
 - $N_{\text{total}} / N_{\text{outside_MG}}$ in FR1
 - $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ in FR2 with $N_{\text{available}} = 0$
 - $N_{\text{total}} / N_{\text{available}}$ in FR2 with $N_{\text{available}} > 0$
- For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any CSI-RS resource occasion:
 - N_{total} is the total number of CSI-RS resource occasions within the window W, including those overlapped with measurement gap occasions or SMTC occasions within the window W, and
 - $N_{\text{outside_MG}}$ is the number of CSI-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
 - $N_{\text{available}}$ is the number of CSI-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W

T_{L1} is periodicity of the target CSI-RS.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P = \frac{1}{1 - \frac{T_{CSI-RS}}{xRP}}$, when in the monitored cell there are GAPS configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and
- $P=1$ when in the monitored cell there are no GAPS overlapping with any occasion of the CSI-RS.

For FR2,

- $P=1$, when CSI-RS is not overlapped with a GAP and also not overlapped with SMTC occasion.
- $P = \frac{1}{1 - \frac{T_{CSI-RS}}{xRP}}$, when CSI-RS is partially overlapped with GAP and CSI-RS is not overlapped with SMTC occasion ($T_{CSI-RS} < xRP$)
- $P = \frac{1}{1 - \frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is not overlapped with GAP and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$).
- $P = P_{\text{sharing factor}}$, when CSI-RS is not overlapped with GAP and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$).
- $P=1$, when aperiodic CSI-RS resource is not overlapped with GAP
- $P = \frac{1}{1 - \frac{T_{CSI-RS}}{xRP} - \frac{T_{CSI-RS}}{T_{SMTCperiod}}}$, when CSI-RS is partially overlapped with GAP and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and
 - $T_{SMTCperiod} \neq xRP$ or
 - $T_{SMTCperiod} = xRP$ and $T_{CSI-RS} < 0.5 * T_{SMTCperiod}$
- $P = \frac{3}{1 - \frac{T_{CSI-RS}}{xRP}}$, when CSI-RS is partially overlapped with GAP and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and $T_{SMTCperiod} = xRP$ and $T_{CSI-RS} = 0.5 * T_{SMTCperiod}$
- $P = \frac{1}{1 - \frac{T_{CSI-RS}}{\min(T_{SMTCperiod}, xRP)}}$, when CSI-RS is partially overlapped with GAP ($T_{CSI-RS} < xRP$) and CSI-RS is partially overlapped with SMTC occasion ($T_{CSI-RS} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with GAP.
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{CSI-RS}}{xRP}}$, when CSI-RS is partially overlapped with GAP and CSI-RS is fully overlapped with SMTC occasion ($T_{CSI-RS} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with GAP ($T_{SMTCperiod} < xRP$)

Where:

- $P_{\text{sharing factor}} = 1$, if the CSI-RS configured for L1-RSRP measurement outside gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
 - not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.
- $P_{\text{sharing factor}} = 3$, otherwise.

$T_{\text{SMTCperiod}}$ = the configured SMTC period.

$T_{\text{CSI-RS}}$ = the periodicity of CSI-RS configured for L1-RSRP measurement

If the UE is configured with Pre-MG, a CSI-RS or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.

- When a measurement gap is configured and the measurement gap is not NCSG,
 - a CSI-RS or an SMTC occasion is considered to be as overlapped with the GAP if it overlaps a measurement gap occasion, and
 - $x_{\text{RP}} = M_{\text{GRP}}$
- Otherwise, when NCSG measurement gap is configured,
 - a CSI-RS or an SMTC occasion is considered to be as overlapped with the GAP if
 - it overlaps the VIL1 or VIL2 of NCSG, or
 - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,
 - and
 - $x_{\text{RP}} = V_{\text{IRP}}$

When concurrent gaps are configured, a CSI-RS resource or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to clause 9.1.8.

Table 9.5.4.2-1: Measurement period $T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$ for FR1

Configuration	$T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$ (ms)
non-DRX	$\max(T_{\text{Report}}, \text{ceil}(M \cdot P) \cdot T_{\text{CSI-RS}})$
DRX cycle $\leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(K \cdot M \cdot P) \cdot \max(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M \cdot P) \cdot T_{\text{DRX}}$
Note 1: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3. Note 3: $K = 1$ when $T_{\text{CSI-RS}} \leq 40\text{ ms}$ and <i>highSpeedMeasFlag-r16</i> or <i>highSpeedMeasCA-Scell-r17</i> are configured; otherwise $K = 1.5$. Note 4: When <i>highSpeedMeasFlag-r16</i> is configured, the requirements apply only to UE supporting either <i>measurementEnhancement-r16</i> or <i>intraNR-MeasurementEnhancement-r16</i> or <i>measurementEnhancementCA-r17</i> .	

Table 9.5.4.2-2: Measurement period $T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$ for FR2

Configuration	$T_{\text{L1-RSRP_Measurement_Period_CSI-RS}}$ (ms)
non-DRX	$\max(T_{\text{Report}}, \text{ceil}(M \cdot P \cdot N) \cdot T_{\text{CSI-RS}})$
DRX cycle $\leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot \max(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M \cdot P \cdot N) \cdot T_{\text{DRX}}$
Note 1: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3.	

9.5.4A Void

9.5.4A.1 Void

Table 9.5.4A.1-1: Void

9.5.5 Measurement restriction for CSI-RS and SSB for L1-RSRP measurement

The UE is required to be capable of measuring SSB and CSI-RS for L1-RSRP without measurement gaps. The UE is required to perform the SSB and CSI-RS measurements with measurement restrictions as described in the following clauses.

9.5.5.1 Measurement restriction for SSB based L1-RSRP

For FR1, when the SSB for L1-RSRP measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports simultaneousRxDataSSB-DiffNumerology, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
 - If UE does not support simultaneousRxDataSSB-DiffNumerology, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, when the SSB for L1-RSRP measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, when the SSB for L1-RSRP measurement on one CC is in the same OFDM symbol as SSB from cell with additional PCI for BFD, CBD measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSBs. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, if the network configures same or mixed numerology between SSB for L1-RSRP measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, UE shall be able to perform the related SSB based measurements in one band without any measurement restrictions in the other band, provided that UE is capable of independent beam management on this FR2 band pair.

9.5.5.2 Measurement restriction for CSI-RS based L1-RSRP

The SSB mentioned in this clause can be associated with either the serving cell PCI or a PCI different from serving cell PCI.

For both FR1 and FR2, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for L1-RSRP measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and SSB. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for L1-RSRP measurement without any restriction.

For FR2, when the CSI-RS for L1-RSRP measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD or L1-RSRP measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and SSB. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS for L1-RSRP measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and the other CSI-RS. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.
 - The CSI-RS for L1-RSRP measurement or the other CSI-RS in a resource set configured with repetition ON, or
 - The other CSI-RS is configured in q1 and beam failure is detected, or
 - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS for L1-RSRP measurement without any restriction.

9.5.6 Scheduling availability of UE during L1-RSRP measurement

Scheduling availability restrictions described in the following clauses apply when the UE is performing L1-RSRP measurement on serving cell, and UE is receiving PDCCH/PDSCH from serving cell and/or cell(s) with different PCI.

9.5.6.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as RS for L1-RSRP measurement with the same SCS as PDSCH/PDCCH in FR1.

9.5.6.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as RS for L1-RSRP measurement. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured for L1-RSRP measurement.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on symbols corresponding to the SSB indexes configured for L1-RSRP measurement.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on serving cell where L1-RSRP measurement is performed apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands than the bands in which the serving cell where L1-RSRP measurement is performed is configured.

9.5.6.3 Scheduling availability of UE performing L1-RSRP measurement on FR2

The following scheduling restriction applies due to L1-RSRP measurement.

- For the case where RS for L1-RSRP measurement is CSI-RS which is QCLed with active TCI state for PDCCH/PDSCH and not in a CSI-RS resource set with repetition ON, and N=1 applies as specified in clause 9.5.4.2
- There are no scheduling restrictions due to L1-RSRP measurement performed based on the CSI-RS.
- Otherwise
 - For FR2 power class 6 UE which is not configured with *highSpeedMeasFlagFR2-r17*, and for the UE not supporting FR2 power class 6, for FR2-1 or the reference symbols to be measured for L1-RSRP is not using 480 kHz SCS or 960 kHz SCS on FR2-2, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on
 - symbols corresponding to the SSB indexes configured for L1-RSRP measurement, and/or
 - symbols corresponding to the periodic CSI-RS resource configured for L1-RSRP measurement, and/or
 - symbols corresponding to the semi-persistent CSI-RS resource configured for L1-RSRP measurement when the resource is activated, and/or
 - symbols corresponding to the aperiodic CSI-RS resource configured for L1-RSRP measurement when the reporting is triggered.
 - For FR2-2 and the reference symbols to be measured for L1-RSRP is using 480 kHz SCS or 960 kHz SCS, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on
 - symbols corresponding to the SSB indexes configured for L1-RSRP measurement, and on one data symbol before and one data symbol after the symbols corresponding to the SSB indexes configured for L1-RSRP measurement, and/or
 - symbols corresponding to the periodic CSI-RS resource configured for L1-RSRP measurement, and on one data symbol before and one data symbol after the symbols corresponding to the periodic CSI-RS resource configured for L1-RSRP measurement, and/or
 - symbols corresponding to the semi-persistent CSI-RS resource configured for L1-RSRP measurement when the resource is activated, and on one data symbol before and one data symbol after the symbols corresponding to the semi-persistent CSI-RS resource configured for L1-RSRP measurement when the resource is activated, and/or
 - symbols corresponding to the aperiodic CSI-RS resource configured for L1-RSRP measurement when the reporting is triggered, and on one data symbol before and one data symbol after the symbols corresponding to the aperiodic CSI-RS resource configured for L1-RSRP measurement when the reporting is triggered.
 - For FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on
 - symbols corresponding to the SSB indexes configured for L1-RSRP measurement and 1 data symbol before each consecutive SSB symbols to be measured for L1-RSRP and 1 data symbol after each consecutive SSB symbols to be measured for L1-RSRP, and/or
 - symbols corresponding to the periodic CSI-RS resource configured for L1-RSRP measurement and 1 data symbol before each periodic CSI-RS resource to be measured for L1-RSRP and 1 data symbol after each periodic CSI-RS for L1-RSRP measurement symbols to be measured for L1-RSRP, and/or
 - symbols corresponding to the semi-persistent CSI-RS resource configured for L1-RSRP measurement and 1 data symbol before each semi-persistent CSI-RS resource to be measured for L1-RSRP and 1 data symbol after each semi-persistent CSI-RS resource to be measured for L1-RSRP when the resource is activated, and/or

- symbols corresponding to the aperiodic CSI-RS resource configured for L1-RSRP measurement and 1 data symbol before each aperiodic CSI-RS resource to be measured for L1-RSRP measurement and 1 data symbol after each aperiodic CSI-RS resource to be measured for L1-RSRP measurement when the reporting is triggered.

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions on serving cell where L1-RSRP measurement is performed apply to all serving cells in the band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cells in the bands due to L1-RSRP measurement performed on FR2 serving cell(s) in different band(s), provided that UE is capable of independent beam management on this FR2 band pair. Additionally, there is no scheduling restriction if the UE is configured with different numerology between SSB on one FR2 band and data on the other FR2 band provided the UE is configured for IBM operation for the band pair.

If following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE shall receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for L1-RSRP measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE shall receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for L1-RSRP measurement.

9.5.6.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 serving cell(s) due to L1-RSRP measurement performed on FR2 serving cell(s).

There are no scheduling restrictions on FR2 serving cell(s) due to L1-RSRP measurement performed on FR1 serving cell(s).

9.5A L1-RSRP measurements for Reporting under CCA

9.5A.1 Introduction

When configured by the network, the UE shall be able to perform L1-RSRP measurements of configured SSB resources for L1-RSRP. The measurements shall be performed for a serving cell under CCA operating mode, including PCell, PSCell, or SCell, on the resources configured for L1-RSRP measurements within the active BWP.

The UE shall be able to measure all SSB resources of the *csi-SSB-ResourceSet* within the *CSI-ResourceConfig* settings configured for L1-RSRP for the active BWP, provided that the number of resources does not exceed the UE capability indicated by *beamManagementSSB-CSI-RS*.

The UE shall report the measurement quantity (*reportQuantity*) and send periodic, semi-persistent or aperiodic reports, according to the *reportConfigType* according to the CSI reporting configuration(s) (*CSI-ReportConfig*) for the active BWP.

During EN-DC operation in FR-1, when the UE is configured to perform E-UTRA SRS carrier-based switching, an additional delay can be expected.

The requirements in clause 9.5A apply for any *channelAccessMode* configuration [TS 38.331, 2].

In the requirements of clause 9.5A, the term SSB occasion not available at the UE refers to when the SSB is configured by gNB in a cell on a carrier frequency subject to CCA, but the first two successive candidate SSB positions for the same SS/PBCH block index within the set of configured SSB are not available at the UE due to DL CCA failures at gNB during the corresponding evaluation or measurement period; otherwise the SSB occasion is considered as available at the UE.

9.5A.2 Requirements applicability

The requirements in clause 9.5A apply, provided:

- The SSB resources configured for L1-RSRP measurements are measurable.

An SSB resource configured for L1-RSRP shall be considered measurable when for each relevant SSB the following conditions are met:

- L1-RSRP related side conditions given in clause 10.1.19.1 for FR1 for a corresponding band,
- SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.4.1 for a corresponding band.

An SSB resource configured for L1-RSRP shall be considered measurable when the measurable resource conditions are met for SSB resource.

Requirements are defined for periodic, semi-persistent and aperiodic resources.

9.5A.3 Measurement Reporting Requirements

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.19 for FR1 and 10.1.20 for FR2-2 if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-RSRP based reporting as defined in clause 10.1.19 for FR1 and 10.1.20 for FR2-2. The differential L1-RSRP is quantized to a 4-bit value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in 10.1.6.

During EN-DC operation, for FR1, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected if the UE is capable of per-FR gap, or an additional delay can be expected.

9.5A.3.1 Periodic Reporting

Reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2-2, respectively.

The UE shall only send periodic L1-RSRP measurement reports for an active BWP.

The UE shall transmit the periodic L1-RSRP reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.5A.3.2 Semi-Persistent Reporting

Reported L1-RSRP measurements contained in a Semi-Persistent L1-RSRP measurement report shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2-2, respectively. This requirement applies for semi-persistent L1-RSRP reports send on PUSCH or PUCCH.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUSCH, if a DCI request has been received.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUCCH, if an activation command [7] has been received.

The UE shall transmit the semi-persistent L1-RSRP reporting on PUSCH or PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

When CCA is used on target frequency, if UE cannot transmit HARQ-ACK for the MAC CE activation command due to UL CCA failure, the UE shall not perform MAC CE activation at the MAC action time based on the originally scheduled HARQ-ACK transmission time specified in clause 5.2.1.5.2 in TS 38.214 [26].

When CCA is used on target frequency, if UE cannot transmit HARQ-ACK for the MAC CE deactivation command due to UL CCA failure, the UE shall perform MAC CE deactivation at the MAC action time based on the originally scheduled HARQ-ACK transmission time specified in clause 5.2.1.5.2 in TS 38.214 [26].

9.5A.3.3 Aperiodic Reporting

Reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2-2, respectively.

The UE shall only send aperiodic L1-RSRP measurement reports if a DCI trigger has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-RSRP reporting on PUSCH over the air interface at the time specified according to clause 6.1.2.1 in TS 38.214 [26].

9.5A.4 L1-RSRP measurement requirements

9.5A.4.1 SSB based L1-RSRP Reporting

The value of $T_{L1-RSRP_Measurement_Period_SSB_CCA}$ is defined in Table 9.5A.4.1-1 for FR1, and in Table 9.5A.4.1-2 for FR2-2, where,

- $M=1$ if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and $M=3$ otherwise
- $N = 8$

For FR1, for a UE supporting *concurrentMeasGap-r17* concurrent measurement gap and when concurrent gaps are configured,

- P value for an SSB resource to be measured is defined as $N_{total} / N_{outside_MG}$
- For a window W of duration $\max(T_{L1}, MGRP_max)$, where $MGRP_max$ is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any SSB resource occasion:
 - N_{total} is the total number of SSB resource occasions within the window W , including those overlapped with measurement gap occasions within the window W , and
 - $N_{outside_MG}$ is the number of SSB resource occasions that are not overlapped with any measurement gap occasion within the window W

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For FR1,

- $P = \frac{1}{1 - \frac{T_{SSB}}{xGP}}$, when in the monitored cell there are GAPS configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB; and
- $P=1$ when in the monitored cell there are no GAPS overlapping with any occasion of the SSB.

For FR2-2,

- $P = \frac{1}{1 - \frac{T_{SSB}}{T_{SMTCperiod}}}$, when SSB is not overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB} < T_{SMTCperiod}$).

- P is $P_{\text{sharing factor}}$, when SSB is not overlapped with measurement gap and SSB is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{MGRP} \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when SSB is partially overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{\text{SMTCperiod}} \neq MGRP$ or
 - $T_{\text{SMTCperiod}} = MGRP$ and $T_{\text{SSB}} < 0.5 * T_{\text{SMTCperiod}}$
- P is $\frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{MGRP}}$, when SSB is partially overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = MGRP$ and $T_{\text{SSB}} = 0.5 * T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when S SSB is partially overlapped with measurement gap ($T_{\text{SSB}} < MGRP$) and SSB is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap.
- P is $\frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{MGRP}}$, when SSB is partially overlapped with measurement gap and SSB is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < MGRP$)

Where:

- $P_{\text{sharing factor}} = 1$, if the SSB configured for L1-RSRP measurement outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
 - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured,
- $P_{\text{sharing factor}} = 3$, otherwise.

]

$T_{\text{SSB}} = \text{ssb-periodicityServingCell}$

$T_{\text{SMTCperiod}} = \text{the configured SMTC1 period or SMTC2 period if configured}$

- When a measurement gap is configured,
 - an SSB is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and
 - $xRP = MGRP$
- When NCSG is configured,
 - an SSB is considered to be overlapped with the GAP if it overlaps the VIL1 or VIL2 of NCSG, and
 - $xRP = VIRP$
- If the UE is configured with Pre-MG, an SSB is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.
- When concurrent gaps are configured, an SSB or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to clause 9.1.8.

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{\text{SMTCPeiod}}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{\text{SMTCPeiod}}$ corresponds to the value of higher layer parameter *smtc1*.

Longer evaluation period would be expected if the combination of SSB, SMTc occasion and measurement gap configurations does not meet previous conditions.

UE shall report RSRP_0 (Not valid) if $L_1 > L_{1\text{max}}$, where L_1 and $L_{1\text{max}}$ are defined in Table 9.5A.4.1-1.

Table 9.5A.4.1-1: Measurement period $T_{\text{L1-RSRP_Measurement_Period_SSB_CCA}}$ for FR1

Configuration	$T_{\text{L1-RSRP_Measurement_Period_SSB_CCA}}$ (ms)
non-DRX	$\max(T_{\text{Report}}, \text{ceil}((M+L_1)*P)*T_{\text{SSB}})$
DRX cycle $\leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(1.5*(M+L_1)*P)*\max(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}((M+L_1)*P)*T_{\text{DRX}}$
Note 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: $L_1=0$ if higher layer parameter timeRestrictionForChannelMeasurement is configured. Otherwise, when DRX is not configured L_1 is the number of SSBs not available at the UE during $T_{\text{L1-RSRP_Measurement_Period_SSB_CCA}}$, and when DRX is configured L_1 is the number of DRX cycles in which at least one SSB is not available at the UE during $T_{\text{L1-RSRP_Measurement_Period_SSB_CCA}}$, where $L_1 \leq L_{1\text{max}}$. The UE is not required to determine the availability of SSB occasions more frequent than Once per $\max(T_{\text{Report}}, P * T_{\text{SSB}})$ if no DRX is used, Once per $\max(T_{\text{Report}}, \text{Ceil}(1.5 * P) * \max(T_{\text{DRX}}, T_{\text{SSB}}))$ if DRX cycle $\leq 320\text{ms}$, Once per $P * T_{\text{DRX}}$ if DRX cycle $> 320\text{ms}$. Note 3: $L_{1\text{max}} = 7$ for $\max(T_{\text{DRX}}, T_{\text{SSB}}) \leq 40\text{ms}$ assuming $T_{\text{DRX}}=0$ for non-DRX, $L_{1\text{max}} = 5$ for $40\text{ms} < \max(T_{\text{DRX}}, T_{\text{SSB}}) \leq 320\text{ms}$, $L_{1\text{max}} = 3$ for $T_{\text{DRX}} > 320\text{ms}$.	

Table 9.5A.4.1-2: Measurement period $T_{\text{L1-RSRP_Measurement_Period_SSB_CCA}}$ for FR2-2

Configuration	$T_{\text{L1-RSRP_Measurement_Period_SSB_CCA}}$ (ms)
non-DRX	$\max(T_{\text{Report}}, \text{ceil}((M+L_1)*P*N)*T_{\text{SSB}})$
DRX cycle $\leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(1.5*(M+L_1)*P*N)*\max(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(1.5*(M+L_1)*P*N)*T_{\text{DRX}}$
Note 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: $L_1=0$ if higher layer parameter timeRestrictionForChannelMeasurement is configured. Otherwise, when DRX is not configured L_1 is the number of SSB occasion groups not available at the UE during $T_{\text{L1-RSRP_Measurement_Period_SSB_CCA}}$, where $L_1 \leq L_{1\text{max}}$. An SSB occasions group consists of N consecutive SSB occasions, and the SSB occasions group is not available at the UE when at least one SSB occasion in the group is not transmitted by the gNB. When DRX is configured, L_1 is the number of DRX cycle groups in which at least one SSB occasion is not available at the UE during $T_{\text{L1-RSRP_Measurement_Period_SSB_CCA}}$, where $L_1 \leq L_{1\text{max}}$. A DRX group consists of N DRX cycles, and the DRX cycle group is not available when there is at least one DRX in which at least one SSB occasion is not available. The UE is not required to determine the availability of SSB occasions more frequent than once per DRX cycle length, when configured with DRX. Note 3: $L_{1\text{max}} = 7$ for $\max(T_{\text{DRX}}, T_{\text{SSB}}) \leq 40\text{ms}$ assuming $T_{\text{DRX}}=0$ for non-DRX, $L_{1\text{max}} = 5$ for $40\text{ms} < \max(T_{\text{DRX}}, T_{\text{SSB}}) \leq 320\text{ms}$, $L_{1\text{max}} = 3$ for $T_{\text{DRX}} > 320\text{ms}$.	

9.5A.5 Measurement restriction for L1-RSRP measurement

The UE is required to be capable of measuring SSB for L1-RSRP without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following clauses.

9.5A.5.1 Measurement restriction for SSB based L1-RSRP

When the SSB for L1-RSRP measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure SSB for L1-RSRP measurement.

9.5A.6 Scheduling availability of UE during L1-RSRP measurement

Scheduling availability restrictions when the UE is performing L1-RSRP measurement are described in the following clauses.

9.5A.6.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB configured as RS for L1-RSRP measurement with the same SCS as PDSCH/PDCCH in FR1.

9.5A.6.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as RS for L1-RSRP measurement. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured for L1-RSRP measurement.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on symbols corresponding to the SSB indexes configured for L1-RSRP measurement.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on serving cell where L1-RSRP measurement is performed apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands than the bands in which the serving cell where L1-RSRP measurement is performed is configured.

9.5A.6.3 (Void)

9.5A.6.3A Scheduling availability of UE performing L1-RSRP measurement in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR2 serving cell(s) due to L1-RSRP measurement performed on serving cell(s) under CCA.

9.5A.6.3B Scheduling availability of UE performing L1-RSRP measurement on FR2-2

The following scheduling restriction applies due to L1-RSRP measurement on an FR2-2 serving PCell and/or PSCell.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on
 - symbols corresponding to the SSB indexes configured for L1-RSRP measurement, and/or

- symbols corresponding to the periodic CSI-RS resource configured for L1-RSRP measurement, and/or
- symbols corresponding to the semi-persistent CSI-RS resource configured for L1-RSRP measurement when the resource is activated, and/or
- symbols corresponding to the aperiodic CSI-RS resource configured for L1-RSRP measurement when the reporting is triggered.

When intra-band carrier aggregation in FR2-2 is performed, the scheduling restrictions on serving cell where L1-RSRP measurement is performed apply to all serving cells in the band on the symbols that fully or partially overlap with restricted symbols.

For FR2-2, if following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE is expected to receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for L1-RSRP measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE is expected to receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for L1-RSRP measurement.

9.5A.6.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 serving cell(s) due to L1-RSRP measurement performed on FR2-2 serving cell(s) under CCA.

There are no scheduling restrictions on FR2 serving cell(s) due to L1-RSRP measurement performed on FR1 serving cell(s) under CCA.

9.5B L1-RSRP measurements for Reporting for RedCap

9.5B.1 Introduction

The applicability of the requirements for performing L1-RSRP measurements for reporting in subclause 9.5B is defined in Section 3.6. The SSB and SMTC in this section applies for both CD-SSB and NCD-SSB if it is not additional specified.

When configured by the network, the UE shall be able to perform L1-RSRP measurements of configured CSI-RS, SSB or CSI-RS and SSB resources for L1-RSRP. The measurements shall be performed for PCell, on the resources configured for L1-RSRP measurements within the active BWP.

The UE shall be able to measure all CSI-RS resources and/or SSB resources of the *nzp-CSI-RS-ResourceSet* and/or *csi-SSB-ResourceSet* within the *CSI-ResourceConfig* settings configured for L1-RSRP for the active BWP, provided that the number of resources does not exceed the UE capability indicated by *beamManagementSSB-CSI-RS*.

The UE shall report the measurement quantity (*reportQuantity*) and send periodic, semi-persistent or aperiodic reports, according to the *reportConfigType* according to the CSI reporting configuration(s) (*CSI-ReportConfig*) for the active BWP.

9.5B.2 Requirements applicability

The requirements in clause 9.5B apply, provided:

- The CSI-RS or SSB or CSI-RS and SSB resources configured for L1-RSRP measurements are measurable.

An SSB resource configured for L1-RSRP shall be considered measurable when for each relevant SSB the following conditions are met:

For 1 Rx RedCap:

- L1-RSRP related side conditions given in clauses 10.1A.14.1 for FR1, respectively, for a corresponding band,
- SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.4.1 for a corresponding band.

For 2 Rx RedCap:

- L1-RSRP related side conditions given in clauses 10.1.19.1 and 10.1.20.1 for FR1 and FR2, respectively, for a corresponding band,
- SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.4.1 for a corresponding band.

A CSI-RS resource configured for L1-RSRP shall be considered measurable when for each relevant CSI-RS the following conditions are met:

For 1 Rx RedCap:

- L1-RSRP related side conditions given in clauses 10.1A.14.2 for FR1, respectively, for a corresponding band,
- CSI-RS_{RP} and CSI-RS $\hat{E}_s/I_{ot}$ according to Annex B.2.4.2 for a corresponding band.

For 2 Rx RedCap:

- L1-RSRP related side conditions given in clauses 10.1.19.2 and 10.1.20.2 for FR1 and FR2, respectively, for a corresponding band,
- CSI-RS_{RP} and CSI-RS $\hat{E}_s/I_{ot}$ according to Annex B.2.4.2 for a corresponding band.

A CSI-RS and SSB resource configured for L1-RSRP shall be considered measurable when the measurable resource conditions are met for both CSI-RS resource and SSB resource.

Requirements are defined for periodic, semi-persistent and aperiodic resources.

9.5B.3 Measurement Reporting Requirements

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1A.14 for FR1, for 1 Rx RedCap, and 10.1.19 for FR1 and 10.1.20 for FR2 for 2 Rx RedCap, if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-RSRP based reporting as defined in clause 10.1A.14 for FR1, for 1 Rx RedCap, and 10.1.19 for FR1 and 10.1.20 for FR2 for 2 Rx RedCap. The differential L1-RSRP is quantized to a 4-bit value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in clause 10.1.6.

9.5B.3.1 Periodic Reporting

For 1 Rx RedCap, reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in clause 10.1A.14 for FR1.

For 2 Rx RedCap, reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send periodic L1-RSRP measurement reports for an active BWP.

The UE shall transmit the periodic L1-RSRP reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.5B.3.2 Semi-Persistent Reporting

For 1 Rx RedCap, reported L1-RSRP measurements contained in a Semi-Persistent L1-RSRP measurement report shall meet the requirements in clauses 10.1A.14 for FR1. This requirement applies for semi-persistent L1-RSRP reports sent on PUSCH or PUCCH.

For 2 Rx RedCap, reported L1-RSRP measurements contained in a Semi-Persistent L1-RSRP measurement report shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively. This requirement applies for semi-persistent L1-RSRP reports sent on PUSCH or PUCCH.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUSCH, if a DCI request has been received.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUCCH, if an activation command [7] has been received.

The UE shall transmit the semi-persistent L1-RSRP reporting on PUSCH or PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.5B.3.3 Aperiodic Reporting

For 1 Rx RedCap, reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clause 10.1A.14.

For 2 Rx RedCap, reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send aperiodic L1-RSRP measurement reports, if a DCI trigger has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-RSRP reporting on PUSCH over the air interface at the time specified according to clause 6.1.2.1 in TS 38.214 [26].

9.5B.4 L1-RSRP measurement requirements

9.5B.4.1 SSB based L1-RSRP Reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{\text{L1-RSRP_Measurement_Period_SSB_RedCap}}$.

The value of $T_{\text{L1-RSRP_Measurement_Period_SSB}}$ is defined in Table 9.5B.4.1-1 for FR1 and Table 9.5B.4.1-2 for FR2, for 2 Rx RedCap, and Table 9.5B.4.1-3 for FR1 for 1 Rx RedCap, where

- $M=1$ if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and $M=3$ otherwise.
- $N=8$.

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\text{MRGP}}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB; and
- $P=1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when SSB is not overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$).

- P is $P_{\text{sharing factor}}$, when SSB is not overlapped with measurement gap and SSB is fully overlapped with SMTC period ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}} \cdot \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when SSB is partially overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{\text{SMTCperiod}} \neq \text{MGRP}$ or
 - $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{SSB}} < 0.5 \cdot T_{\text{SMTCperiod}}$
- P is $\frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when SSB is partially overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{SSB}} = 0.5 \cdot T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{SSB}}}{T_{\text{SMTCperiod}}}}$, when S SSB is partially overlapped with measurement gap ($T_{\text{SSB}} < \text{MGRP}$) and SSB is partially overlapped with SMTC occasion ($T_{\text{SSB}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap.
- P is $\frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{SSB}}}{\text{MGRP}}}$, when SSB is partially overlapped with measurement gap and SSB is fully overlapped with SMTC occasion ($T_{\text{SSB}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < \text{MGRP}$)
- $P_{\text{sharing factor}} = 1$, if the SSB configured for L1-RSRP measurement outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
 - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured,
- $P_{\text{sharing factor}} = 3$, otherwise.

Where:

- $T_{\text{SSB}} = \text{ssb-periodicityServingCell}$
- $T_{\text{SMTCperiod}} = \text{the configured SMTC period}$

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc1*.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer L1 RSRP measurement period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

Table 9.5B.4.1-1: Measurement period $T_{\text{L1-RSRP_Measurement_Period_SSB_RedCap}}$ (FR1) for 2 Rx RedCap

Configuration	$T_{\text{L1-RSRP_Measurement_Period_SSB_RedCap}}$ (ms)
non-DRX	$\max(T_{\text{Report}}, \text{ceil}(M \cdot P) \cdot T_{\text{SSB}})$
DRX cycle $\leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(1.5 \cdot M \cdot P) \cdot \max(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M \cdot P) \cdot T_{\text{DRX}}$

Note:	T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.
-------	---

Table 9.5B.4.1-2: Measurement period $T_{L1-RSRP_Measurement_Period_SSB_RedCap}$ (FR2) for 2 Rx RedCap

Configuration	$T_{L1-RSRP_Measurement_Period_SSB_RedCap}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M \cdot P \cdot N) \cdot T_{SSB})$
DRX cycle ≤ 320 ms	$\max(T_{Report}, \text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot \max(T_{DRX}, T_{SSB}))$
DRX cycle > 320 ms	$\text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot T_{DRX}$
Note:	T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.

Table 9.5B.4.1-3: Measurement period $T_{L1-RSRP_Measurement_Period_SSB_RedCap}$ (FR1) for 1 Rx RedCap

Configuration	$T_{L1-RSRP_Measurement_Period_SSB_RedCap}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M \cdot P) \cdot T_{SSB})$
DRX cycle ≤ 320 ms	$\max(T_{Report}, \text{ceil}(1.5 \cdot M \cdot P) \cdot \max(T_{DRX}, T_{SSB}))$
DRX cycle > 320 ms	$\text{ceil}(M \cdot P) \cdot T_{DRX}$
Note:	T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.

9.5B.4.2 CSI-RS based L1-RSRP Reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured CSI-RS resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1-RSRP_Measurement_Period_CSI-RS_RedCap}$.

The value of $T_{L1-RSRP_Measurement_Period_CSI-RS_RedCap}$ is defined in Table 9.5B.4.2-1 for FR1 and in Table 9.5B.4.2-2 for FR2, for 2 Rx RedCap, and in Table 9.5B.4.2-3 for 1 Rx RedCap, where

- For periodic and semi-persistent CSI-RS resources, $M=1$ if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and $M=3$ otherwise
- For aperiodic CSI-RS resources $M=1$
- For periodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, $N=1$. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with
 - SSB for L1-RSRP measurement, or
 - another CSI-RS in resource set configured with repetition ON.
- For periodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, $N=\text{ceil}(\text{maxNumberRxBeam} / N_{\text{res_per_set}})$, where $N_{\text{res_per_set}}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured with QCL-TypeD for all resources in the resource set.
- For semi-persistent CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, $N=1$. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource one RS has QCL-TypeD with
 - SSB for L1-RSRP measurement, or
 - another CSI-RS in resource set configured with repetition ON.
- For semi-persistent CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, $N=\text{ceil}(\text{maxNumberRxBeam} / N_{\text{res_per_set}})$, where $N_{\text{res_per_set}}$ is number of resources in the resource set. The

requirements apply provided TCI state is provided with QCL-TypeD for all resources in the resource set in the MAC CE activating the resource set.

- For aperiodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to OFF, $N=1$. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource one RS has QCL-TypeD with
 - SSB for L1-RSRP measurement, or
 - another CSI-RS in resource set configured with repetition ON.
- For aperiodic CSI-RS resources in a resource set configured with higher layer parameter *repetition* set to ON, $N=1$. UE is not required to meet the accuracy requirements in clause 10.1.19.2 and 10.1.20.2 if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured with QCL-TypeD for all resources in the resource set.

For FR1,

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\text{MGRP}}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and
- $P=1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the CSI-RS.

For FR2,

- $P=1$, when CSI-RS is not overlapped with measurement gap and also not overlapped with SMTC occasion.
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\text{MGRP}}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is not overlapped with SMTC occasion ($T_{\text{CSI-RS}} < \text{MGRP}$)
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when CSI-RS is not overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$).
- $P = P_{\text{sharing factor}}$, when CSI-RS is not overlapped with measurement gap and CSI-RS is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$).
- $P=1$, when aperiodic CSI-RS resource is not overlapped with measurement gap
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\text{MGRP}} - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{\text{SMTCperiod}} \neq \text{MGRP}$ or
 - $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{CSI-RS}} < 0.5 * T_{\text{SMTCperiod}}$
- $P = \frac{3}{1 - \frac{T_{\text{CSI-RS}}}{\text{MGRP}}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with measurement gap and $T_{\text{SMTCperiod}} = \text{MGRP}$ and $T_{\text{CSI-RS}} = 0.5 * T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when CSI-RS is partially overlapped with measurement gap ($T_{\text{CSI-RS}} < \text{MGRP}$) and CSI-RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with measurement gap.
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{\text{MGRP}}}$, when CSI-RS is partially overlapped with measurement gap and CSI-RS is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with measurement gap ($T_{\text{SMTCperiod}} < \text{MGRP}$)

- $P_{\text{sharing factor}} = 1$, if the CSI-RS configured for L1-RSRP measurement outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
 - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured
- $P_{\text{sharing factor}} = 3$, otherwise.

Where:

$T_{\text{SMTCperiod}}$ = the configured SMTC period.

$T_{\text{CSI-RS}}$ = the periodicity of CSI-RS configured for L1-RSRP measurement

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{\text{SMTCperiod}}$ corresponds to the value of higher layer parameter *smtc1*. $T_{\text{SMTCperiod}}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Note: The overlap between CSI-RS for L1-RSRP measurement and SMTC means that CSI-RS for L1-RSRP measurement is within the SMTC window duration.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 serving cell, longer L1 RSRP measurement period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

Table 9.5B.4.2-1: Measurement period $T_{\text{L1-RSRP_Measurement_Period_CSI-RS_RedCap}}$ (FR1) for 2 Rx RedCap

Configuration	$T_{\text{L1-RSRP_Measurement_Period_CSI-RS_RedCap}}$ (ms)
non-DRX	$\max(T_{\text{Report}}, \text{ceil}(M \cdot P) \cdot T_{\text{CSI-RS}})$
DRX cycle $\leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(1.5 \cdot M \cdot P) \cdot \max(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M \cdot P) \cdot T_{\text{DRX}}$
Note 1: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	
Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3.	

Table 9.5B.4.2-2: Measurement period $T_{\text{L1-RSRP_Measurement_Period_CSI-RS_RedCap}}$ (FR2) for 2 Rx RedCap

Configuration	$T_{\text{L1-RSRP_Measurement_Period_CSI-RS_RedCap}}$ (ms)
non-DRX	$\max(T_{\text{Report}}, \text{ceil}(M \cdot P \cdot N) \cdot T_{\text{CSI-RS}})$
DRX cycle $\leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot \max(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M \cdot P \cdot N) \cdot T_{\text{DRX}}$
Note 1: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	
Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3.	

Table 9.5B.4.2-3: Measurement period $T_{\text{L1-RSRP_Measurement_Period_CSI-RS_RedCap}}$ (FR1) for 1 Rx RedCap

Configuration	$T_{\text{L1-RSRP_Measurement_Period_CSI-RS_RedCap}}$ (ms)
non-DRX	$\max(T_{\text{Report}}, \text{ceil}(M \cdot P) \cdot T_{\text{CSI-RS}})$
DRX cycle $\leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(1.5 \cdot M \cdot P) \cdot \max(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M \cdot P) \cdot T_{\text{DRX}}$
Note 1: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3.	

9.5B.5 Measurement restriction for CSI-RS and SSB for L1-RSRP measurement

The UE is required to be capable of measuring SSB and CSI-RS for L1-RSRP without measurement gaps. The UE is required to perform the SSB and CSI-RS measurements with measurement restrictions as described in the following clauses.

9.5B.5.1 Measurement restriction for SSB based L1-RSRP

For FR1, when the SSB for L1-RSRP measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, when the SSB for L1-RSRP measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

9.5B.5.2 Measurement restriction for CSI-RS based L1-RSRP

For both FR1 and FR2, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for L1-RSRP measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and SSB. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for L1-RSRP measurement without any restriction.

9.5B.6 Scheduling availability of UE during L1-RSRP measurement

Scheduling availability restrictions when the UE is performing L1-RSRP measurement are described in the following clauses.

9.5B.6.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

For FD-FDD and TDD RedCap UEs, there are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as RS for L1-RSRP measurement with the same SCS as PDSCH/PDCCH in FR1.

For HD-FDD RedCap UE, scheduling restrictions apply for transmission on PUCCH/PUSCH/SRS during the CBD evaluation period, as CBD evaluation is prioritized over UL transmission. The CBD evaluation period equals the measurement period of $T_{L1-RSRP_Measurement_Period_SSB_RedCap}$ in case L1-RSRP measurement is performed on SSB as defined in clause 9.5B.4.1, or $T_{L1-RSRP_Measurement_Period_CSI-RS_RedCap}$ in case L1-RSRP measurement is performed on CSI-RS and/or SSB as defined in clause 9.5B.4.1.

9.5B.6.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as RS for L1-RSRP measurement. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured for L1-RSRP measurement.

- For FD-FDD and TDD RedCap UEs, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on symbols corresponding to the SSB indexes configured for L1-RSRP measurement.
- For HD-FDD RedCap UE, scheduling restrictions apply for transmission on PUCCH/PUSCH/SRS during the CBD evaluation period, as CBD evaluation is prioritized over UL transmission. The CBD evaluation period equals the measurement period of $T_{L1-RSRP_Measurement_Period_SSB_RedCap}$ in case L1-RSRP measurement is performed on SSB as defined in clause 9.5B.4.1, or $T_{L1-RSRP_Measurement_Period_CSI-RS_RedCap}$ in case L1-RSRP measurement is performed on CSI-RS and/or SSB as defined in clause 9.5B.4.1.

9.5B.6.3 Scheduling availability of UE performing L1-RSRP measurement on FR2

The following scheduling restriction applies due to L1-RSRP measurement.

- For the case where RS for L1-RSRP measurement is CSI-RS which is QCLed with active TCI state for PDCCH/PDSCH and not in a CSI-RS resource set with repetition ON, and N=1 applies as specified in clause 9.5B.4.2
 - There are no scheduling restrictions due to L1-RSRP measurement performed based on the CSI-RS.
- Otherwise
 - The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on
 - symbols corresponding to the SSB indexes configured for L1-RSRP measurement, and/or
 - symbols corresponding to the periodic CSI-RS resource configured for L1-RSRP measurement, and/or

- symbols corresponding to the semi-persistent CSI-RS resource configured for L1-RSRP measurement when the resource is activated, and/or
- symbols corresponding to the aperiodic CSI-RS resource configured for L1-RSRP measurement when the reporting is triggered.

If following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE shall receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for L1-RSRP measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE shall receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for L1-RSRP measurement.

9.5C L1-RSRP measurements for Reporting for satellite access

9.5C.1 Introduction

When configured by the network, the UE shall be able to perform L1-RSRP measurements of configured CSI-RS, SSB or CSI-RS and SSB resources for L1-RSRP. The measurements shall be performed for PCell on the resources configured for L1-RSRP measurements within the active BWP.

The UE shall be able to measure all CSI-RS resources and/or SSB resources of the *nzp-CSI-RS-ResourceSet* and/or *csi-SSB-ResourceSet* within the *CSI-ResourceConfig* settings configured for L1-RSRP for the active BWP, provided that the number of resources does not exceed the UE capability indicated by *beamManagementSSB-CSI-RS*.

The UE shall report the measurement quantity (*reportQuantity*) and send periodic, semi-persistent or aperiodic reports, according to the *reportConfigType* according to the CSI reporting configuration(s) (*CSI-ReportConfig*) for the active BWP.

9.5C.2 Requirements applicability

The requirements in clause 9.5C apply, provided:

- The CSI-RS or SSB or CSI-RS and SSB resources configured for L1-RSRP measurements are measurable.

An SSB resource configured for L1-RSRP shall be considered measurable when for each relevant SSB the following conditions are met:

- L1-RSRP related side conditions given in clauses 10.1.19C.1 for FR1, for a corresponding band,
- SSB_RP and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.19.1 for a corresponding band.

A CSI-RS resource configured for L1-RSRP shall be considered measurable when for each relevant CSI-RS the following conditions are met:

- L1-RSRP related side conditions given in clauses 10.1.19C.2 for FR1, respectively, for a corresponding band,
- CSI-RS_RP and CSI-RS $\hat{E}_s/I_{ot}$ according to Annex B.2.19.2 for a corresponding band.

A CSI-RS and SSB resource configured for L1-RSRP shall be considered measurable when the measurable resource conditions are met for both CSI-RS resource and SSB resource.

Requirements are defined for periodic, semi-persistent and aperiodic resources.

9.5C.3 Measurement Reporting Requirements

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.19C for FR1 if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-RSRP based reporting as defined in clause 10.1.19C for FR1. The differential L1-RSRP is quantized to a 4-bit value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in 10.1.6.

9.5C.3.1 Periodic Reporting

Reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in clauses 10.1.19C.

The UE shall only send periodic L1-RSRP measurement reports for an active BWP.

The UE shall transmit the periodic L1-RSRP reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.5C.3.2 Semi-Persistent Reporting

Reported L1-RSRP measurements contained in a Semi-Persistent L1-RSRP measurement report shall meet the requirements in clauses 10.1.19C. This requirement applies for semi-persistent L1-RSRP reports send on PUSCH or PUCCH.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUSCH, if a DCI request has been received.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUCCH, if an activation command [7] has been received.

The UE shall transmit the semi-persistent L1-RSRP reporting on PUSCH or PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.5C.3.3 Aperiodic Reporting

Reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clauses 10.1.19C.

The UE shall only send aperiodic L1-RSRP measurement reports, if a DCI trigger has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-RSRP reporting on PUSCH over the air interface at the time specified according to clause 6.1.2.1 in TS 38.214 [26].

9.5C.4 L1-RSRP measurement requirements

9.5C.4.1 SSB based L1-RSRP Reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1-RSRP_Measurement_Period_SSB_SAN}$.

The value of $T_{L1-RSRP_Measurement_Period_SSB_SAN}$ is defined in Table 9.5C.4.1-1 for FR1, where

- $M=1$ if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and $M=3$ otherwise

- P value for SSB resource to be measured is defined as
 - $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ with $N_{\text{available}} = 0$
 - $N_{\text{total}} / N_{\text{available}}$ with $N_{\text{available}} > 0$
- For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where MGRP max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any SSB resource occasion:
 - N_{total} is the total number of SSB resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
 - $N_{\text{outside_MG}}$ is the number of SSB resource occasions that are not overlapped with any measurement gap occasion within the window W
 - $N_{\text{available}}$ is
 - the number of SSB resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W, if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
 - same as $N_{\text{outside_MG}}$, otherwise
 - T_{L1} is periodicity of the target SSB.
 - $P_{\text{sharing factor}} = 3$.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet previous conditions.

Table 9.5C.4.1-1: Measurement period $T_{L1\text{-RSRP_Measurement_Period_SSB_SAN}}$ for FR1

Configuration	$T_{L1\text{-RSRP_Measurement_Period_SSB_SAN}}$ (ms)
non-DRX	$\max(T_{\text{Report}}, \text{ceil}(M*P)*T_{\text{SSB}})$
DRX cycle $\leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(1.5*M*P)*\max(T_{\text{DRX}}, T_{\text{SSB}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M*P)*T_{\text{DRX}}$
Note: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	

9.5C.4.2 CSI-RS based L1-RSRP Reporting

The UE shall be capable of performing L1-RSRP measurements based on the configured CSI-RS resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1\text{-RSRP_Measurement_Period_CSI-RS_SAN}}$.

The value of $T_{L1\text{-RSRP_Measurement_Period_CSI-RS}}$ is defined in Table 9.5C.4.2-1 for FR1, where

- For periodic and semi-persistent CSI-RS resources, $M=1$ if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and $M=3$ otherwise
- For aperiodic CSI-RS resources $M=1$
- P value for a CSI-RS resource to be measured is defined as
 - $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ with $N_{\text{available}} = 0$
 - $N_{\text{total}} / N_{\text{available}}$ with $N_{\text{available}} > 0$
- For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where MGRP max is the maximum MGRP across all configured per-UE measurement gaps, and starting at the beginning of any CSI-RS resource occasion:
 - N_{total} is the total number of CSI-RS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and

- $N_{\text{outside_MG}}$ is the number of CSI-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
- $N_{\text{available}}$ is
 - the number of CSI-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W , if UE does not support *parallelMeasurementWithoutRestriction* and LEO satellites are measured for intra-frequency measurement, and
 - same as $N_{\text{outside_MG}}$, otherwise
- T_{L1} is periodicity of the target CSI-RS.
- $P_{\text{sharing factor}} = 3$.

Note: The overlap between CSI-RS for L1-RSRP measurement and SMTC means that CSI-RS for L1-RSRP measurement is within the SMTC window duration.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet previous conditions.

Table 9.5C.4.2-1: Measurement period $T_{L1\text{-RSRP_Measurement_Period_CSI-RS_SAN}}$ for FR1

Configuration	$T_{L1\text{-RSRP_Measurement_Period_CSI-RS_SAN}}$ (ms)
non-DRX	$\max(T_{\text{Report}}, \text{ceil}(M \cdot P) \cdot T_{\text{CSI-RS}})$
DRX cycle $\leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(1.5 \cdot M \cdot P) \cdot \max(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M \cdot P) \cdot T_{\text{DRX}}$
Note 1: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS configured for L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-RSRP measurement is transmitted with Density = 3.	

9.5C.5 Measurement restriction for L1-RSRP measurement

The UE is required to be capable of measuring SSB and CSI-RS for L1-RSRP without measurement gaps. The UE is required to perform the SSB and CSI-RS measurements with measurement restrictions as described in the following clauses.

9.5C.5.1 Measurement restriction for SSB based L1-RSRP

For FR1, when the SSB for L1-RSRP measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports simultaneousRxDataSSB-DiffNumerology, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
 - If UE does not support simultaneousRxDataSSB-DiffNumerology, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

9.5C.5.2 Measurement restriction for CSI-RS based L1-RSRP

For FR1, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD or L1-RSRP measurement, UE is not required to receive CSI-RS for L1-RSRP measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has same SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD or L1-RSRP measurement is within the active BWP and has different SCS than CSI-RS for L1-RSRP measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology* the UE shall be able to perform CSI-RS measurement without restrictions.
- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for L1-RSRP measurement and SSB. Longer measurement period for CSI-RS based L1-RSRP measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS for L1-RSRP measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD or L1-RSRP measurement, UE shall be able to measure the CSI-RS for L1-RSRP measurement without any restriction.

9.5C.6 Scheduling availability of UE during L1-RSRP measurement

Scheduling availability restrictions when the UE is performing L1-RSRP measurement are described in the following clauses. For UL, the scheduling restriction applies to UL symbols that fully or partially overlap with the restricted symbols as defined below.

9.5C.6.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB and CSI-RS configured as RS for L1-RSRP measurement with the same SCS as PDSCH/PDCCH in FR1.

9.5C.6.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as RS for L1-RSRP measurement. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured for L1-RSRP measurement.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on symbols corresponding to the SSB indexes configured for L1-RSRP measurement.

9.6 NE-DC: Measurements

9.6.1 Introduction

This clause contains requirements for UE supporting dual connectivity with NR PCell and E-UTRA FDD or TDD PSCell. The requirements apply to UEs that have been configured with NE-DC.

9.6.2 SFTD Measurements

9.6.2.1 Introduction

This clause contains requirements on UE capabilities for reporting of SFN and frame time difference between NR PCell and E-UTRA PSCell in RRC_CONNECTED state. The requirements comprise measurement reporting delay and measurement accuracy. The overall measurement reporting delay includes a RRC procedure delay specified in TS 38.331 [2], and the SFTD measurement reporting delay specified below.

9.6.2.2 SFTD Measurement requirements

When no DRX is used in either of the NR PCell and E-UTRA PSCell, the physical layer measurement period of the SFTD measurement shall be $T_{\text{measure_SFTD1}} = \max(0.2, 5 \times \text{SMTC period})$ s.

When DRX is used in either of the NR PCell or the E-UTRA PSCell, or in both PCell and PSCell, the physical layer measurement period ($T_{\text{measure_SFTD1}}$) of the SFTD measurement shall be as specified in Table 9.6.2.2-1.

Table 9.6.2.2-1: SFTD measurement requirement when DRX is used

DRX cycle length (s) ^{Note2}	$T_{\text{measure_SFTD1}}$ (s)
DRX cycle ≤ 0.04	$\max(0.2, 5 \times \text{SMTC period})$ (Note1)
$0.04 < \text{DRX cycle} \leq 0.32$	$8 \times \max(\text{DRX cycle}, \text{SMTC period})$
$0.32 < \text{DRX cycle} \leq 10.24$	$5 \times \text{DRX cycle}$
Note1: Number of DRX cycles depends upon the DRX cycle in use Note2: DRX cycle length in this table refers to the DRX cycle length configured for PCell or PSCell. When DRX is used in both PCell and PSCell, DRX cycle length in this table refers to the longer of the DRX cycle lengths for PCell and PSCell.	

If PSCell is changed without changing carrier frequency of PSCell while the UE is performing SFTD measurements, the UE shall still meet SFTD measurement and accuracy requirements for the new PSCell. In this case the UE shall restart the SFTD measurement, and the total physical layer measurement period shall not exceed $T_{\text{measure_SFTD2}}$ as defined by the following expression:

$$T_{\text{measure_SFTD2}} = (M+1) \times (T_{\text{measure_SFTD1}}) + M \times T_{\text{PSCell_change_NEDC}}$$

where:

M is the number of times the E-UTRA PSCell is changed over the measurement period ($T_{\text{measure_SFTD2}}$), and

$T_{\text{PSCell_change_NEDC}}$ is the time necessary to change the PSCell; it can be up to 25 ms.

If PCell is changed, or if PSCell is changed to a different carrier frequency, the UE shall terminate the SFTD measurement.

The measurement accuracy for the SFTD measurement when DRX is used as well as when no DRX is used shall be as specified in clause 10.1.21.1.

9.7 Cross Link Interference measurements

9.7.1 Introduction

The UE capable of performing CLI measurements shall be able to measure SRS-RSRP and CLI-RSSI which are defined in TS38.215 [4] within active DL BWP. The measurements requirements in this clause apply for TDD mode only.

CLI measurements are only applicable for RRC_CONNECTED intra-frequency:

- when SRS-RSRP measurement resource is fully confined within BW of DL active BWP
- when CLI-RSSI measurement resource is configured within active BWP

When the UE measures SRS-RSRP and CLI-RSSI, a constant offset relative to the downlink reference timing in the serving cell shall be applied. The constant offset value is derived by UE implementation and shall be at least $T_c \cdot N_{TA_offset}$.

For performing CLI measurement in FR2, UE can assume the configured CLI measurement resources are QCL-ed with TypeD to one of the latest received PDSCH and the latest monitored CORESET.

CLI measurement requirements defined in clause 9.7 are applicable if

- CLI measurement is not performed on an NR carrier in the same band as E-UTRA serving carrier; and
- UE supports simultaneous Rx/Tx for inter-band CA, inter-band EN-DC, inter-band NE-DC, and NR-DC.

9.7.2 SRS-RSRP measurements

9.7.2.1 Introduction

When configured by the network, the UE shall be able to perform SRS-RSRP measurements of configured *srs-ResourceConfigCLI*. The requirements apply when the subcarrier spacing for SRS-RSRP measurement resource configuration is the same as the subcarrier spacing of the active DL BWP of serving cell. The UE is not required to measure SRS using different SCS compared to the downlink active BWP SCS of the same carrier.

9.7.2.2 Requirements applicability

The requirements in clause 9.7.2 apply, provided:

- SRS resources configured for SRS-RSRP measurements are measurable.

An SRS resource configured for SRS-RSRP shall be considered measurable when for each relevant SRS the following conditions are met:

- SRS-RSRP related side conditions given in clauses 10.1.22.1 for FR1 and FR2 for a corresponding band,
- SRS_{RP} and SRS $\hat{E}_s/I_{ot}$ according to Annex B.2.7 for a corresponding band.

9.7.2.3 Measurement Reporting Requirements

The UE shall send SRS-RSRP reports only for report configurations according to *reportType* which is *cliPeriodical* or *cliEventTriggered* when SRS-RSRP report is configured.

The UE shall report the SRS-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.22.1 for FR1 and FR2.

9.7.2.3.1 Periodic Reporting

Reported SRS-RSRP measurements contained in periodically triggered measurement reports shall meet the requirements in clause 10.1.22.1.

9.7.2.3.2 Event-triggered Periodic Reporting

Reported SRS-RSRP measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.22.1.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.7.2.3.3.

9.7.2.3.3 Event Triggered Reporting

Reported SRS-RSRP measurements contained in periodically triggered measurement reports shall meet the requirements in clause 10.1.22.1.

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report on.

9.7.2.4 Measurement capability

The UE shall be capable of performing SRS-RSRP measurements on the SRS resources configured for measurement, provided that the number of SRS to be monitored by UE does not exceed 8 within a slot, and the total number of SRSs to be monitored by the UE does not exceed 32.

9.7.2.5 SRS-RSRP measurement period

The UE shall be capable of performing SRS-RSRP measurement based on the configured SRS resource, and the UE shall be capable of reporting SRS-RSRP measured over measurement period of $T_{SRS_RSRP_measurement_period}$ for FR1 and FR2.

Table 9.7.2.5-1 Measurement period $T_{SRS_RSRP_measurement_period}$

Configuration	$T_{SRS_measurement_period}$ (ms)
No DRX	$\text{Max}(60, 3 \times T_{SRS})$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(60, \text{Ceil}(1.5 \times 3) \times \text{max}(T_{SRS}, T_{DRX}))$
DRX cycle $> 320\text{ms}$	$3 \times T_{DRX}$
Note: T_{SRS} is SRS measurement periodicity configured <i>SRS-PeriodicityAndOffset</i> , and T_{DRX} is the DRX cycle length.	

If the SRS resources configured for measurement are partially or fully overlapping with SMTC window, SSB or CSI-RS configured for RLM, BFD, CBD or L1-RSRP measurement or measurement gaps, requirements are not specified for $T_{SRS_RSRP_measurement_period}$.

9.7.3 CLI-RSSI measurements

9.7.3.1 Introduction

When configured by the network, the UE shall be able to perform CLI-RSSI measurement of configured *rssi-ResourceConfigCLI*. The subcarrier spacing for CLI-RSSI measurement resource configuration can be same or different from the subcarrier spacing of active BWP. UE shall perform CLI-RSSI measurement with the SCS of the active BWP.

9.7.3.2 Requirements applicability

The requirements in clause 9.7.3 apply, provided:

- The measurement resources configured for CLI-RSSI measurements are measurable.

A measurement resource configured for CLI-RSSI shall be considered measurable when for each relevant CLI-RSSI resource the following conditions are met:

- CLI-RSSI related side conditions given in clauses 10.1.22.2 for FR1 and FR2 for a corresponding band.

9.7.3.3 Measurement Reporting Requirements

The UE shall send CLI-RSSI reports only for report configurations according to *reportType* which is *cliPeriodical* or *cliEventTriggered* when CLI-RSSI report is configured.

The UE shall report the CLI-RSSI value as a 7-bit value in the range [-100, -25] dBm with 1dB step size according to clause 10.1.22.2 for FR1 and FR2.

9.7.3.3.1 Periodic Reporting

Reported CLI-RSSI measurements contained in periodically triggered measurement reports shall meet the requirements in clause 10.1.22.2.

9.7.3.3.2 Event-triggered Periodic Reporting

Reported CLI-RSSI measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.22.2.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.7.3.3.3.

9.7.3.3.3 Event Triggered Reporting

Reported CLI-RSSI measurements contained in periodically triggered measurement reports shall meet the requirements in clause 10.1.22.2.

The UE shall not send any event triggered measurement reports as long as no reporting criteria is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report on.

9.7.3.4 Measurement capability

The UE shall be capable of performing CLI-RSSI measurement based on the configured resource, provided that the maximum number of CLI-RSSI measurement resources for the UE does not exceed 64.

9.7.3.5 CLI-RSSI measurement period

The UE shall be capable of performing CLI-RSSI measurement based on the configured measurement resource within $T_{CLI_RSSI_measurement_period}$. The UE shall be able to provide a single RSSI sample for each measurement resource configured for CLI-RSSI measurement occurring with a configured periodicity. The CLI-RSSI measurement period $T_{CLI_RSSI_measurement_period}$ corresponds to the CLI-RSSI measurement resource periodicity, which is configured for by higher layers via *RSSI-PeriodicityAndOffset*.

If the CLI-RSSI measurement resources configured for measurement are partially or fully overlapping with SMTTC window, SSB or CSI-RS configured for RLM, BFD, CBD or L1-RSRP measurement or measurement gaps, requirements are not specified for $T_{CLI_RSSI_measurement_period}$.

9.7.4 Scheduling availability of UE during CLI measurements

Scheduling availability restrictions when the UE is performing CLI measurements which are SRS-RSRP and CLI-RSSI are described in the following clause.

9.7.4.1 Scheduling availability of UE performing measurement on FR1

The following scheduling restriction applies due to CLI measurements.

- The UE is not expected to transmit PUCCH/PUSCH/SRS on OFDM symbols on which the UE performs CLI measurements, and on 1 data symbol before an OFDM symbol used for CLI measurements for 15 kHz and 30 kHz subcarrier spacing.
- For the UE which does not support *cli-SRS-RSRP-FDM_DL*, the UE is not expected to receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on OFDM symbols on which the UE performs SRS-RSRP measurements, and on 1 data symbol before an OFDM symbol used for SRS-RSRP measurements for 15 kHz and 30 kHz subcarrier spacing.

- For the UE which does not support *cli-RSSI-FDM-DL*, the UE is not expected to receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on OFDM symbols on which the UE performs CLI-RSSI measurements, and on 1 data symbol before an OFDM symbol used for CLI-RSSI measurements for 15 kHz and 30 kHz subcarrier spacing.
- The UE is not expected to transmit PUCCH/PUSCH/SRS on OFDM symbols on which the UE performs CLI measurement, and on 2 data symbols before an OFDM symbol used for CLI measurements for 60 kHz subcarrier spacing.
- For the UE which does not support *cli-SRS-RSRP-FDM_DL*, the UE is not expected to receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on OFDM symbols on which the UE performs SRS-RSRP measurement, and on 2 data symbols before an OFDM symbol used for SRS-RSRP measurements for 60 kHz subcarrier spacing.
- For the UE which does not support *cli-RSSI-FDM-DL*, the UE is not expected to receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on OFDM symbols on which the UE performs CLI-RSSI measurement, and on 2 data symbols before an OFDM symbol used for CLI-RSSI measurements for 60 kHz subcarrier spacing.

When TDD intra-band carrier aggregation is configured, the scheduling restrictions on serving cell where CLI measurements are performed apply on all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

9.7.4.2 Scheduling availability of UE performing measurement on FR2

The following scheduling restriction applies due to CLI measurements.

- The UE is not expected to transmit PUCCH/PUSCH/SRS on OFDM symbols on which the UE performs CLI measurements, and on 1 data symbol before an OFDM symbol used for CLI measurements for 60 kHz subcarrier spacing.
- For the UE which does not support *cli-SRS-RSRP-FDM_DL*, the UE is not expected to receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on OFDM symbols on which the UE performs SRS-RSRP measurements, and on 1 data symbol before an OFDM symbol used for SRS-RSRP measurements for 60 kHz subcarrier spacing.
- For the UE which does not support *cli-RSSI-FDM-DL*, the UE is not expected to receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on OFDM symbols on which the UE performs CLI-RSSI measurements, and on 1 data symbol before an OFDM symbol used for CLI-RSSI measurements for 60 kHz subcarrier spacing.
- The UE is not expected to transmit PUCCH/PUSCH/SRS on OFDM symbols on which the UE performs CLI measurements, and on 2 data symbols before an OFDM symbol used for CLI measurements for 120 kHz subcarrier spacing.
- For the UE which does not support *cli-SRS-RSRP-FDM_DL*, the UE is not expected to receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on OFDM symbols on which the UE performs SRS-RSRP measurements, and on 2 data symbols before an OFDM symbol used for SRS-RSRP measurements for 120 kHz subcarrier spacing.
- For the UE which does not support *cli-RSSI-FDM-DL*, the UE is not expected to receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on OFDM symbols on which the UE performs CLI-RSSI measurements, and on 2 data symbols before an OFDM symbol used for CLI-RSSI measurements for 120 kHz subcarrier spacing.

When TDD intra-band carrier aggregation is configured, the scheduling restrictions on serving cell where CLI measurements are performed apply on all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols.

9.8 L1-SINR measurements for Reporting

9.8.1 Introduction

When configured by the network, the UE shall be able to perform L1-SINR measurements with the measurement resources configured as the selection of:

- CSI-RS based CMR and no dedicated IMR configured;
- SSB based CMR and dedicated IMR configured;
- CSI-RS based CMR and dedicated IMR configured.

The measurements shall be performed for a serving cell, including PCell, PSCell, or SCell, on the resources configured for L1-SINR measurements within the active BWP.

The UE shall be able to measure all CSI-RS resources and/or SSB resources and/or CSI-IM resources of the *nzp-CSI-RS-ResourceSet* and/or *csi-SSB-ResourceSet* and/or *CSI-IM-ResourceSet* within the *CSI-ResourceConfig* settings for L1-SINR for the active BWP and measure interference on corresponding NZP CSI-RS or CSI-IM resources if configured, provided that the number of resources does not exceed the UE capability indicated by *beamManagementSSB-CSI-RS*.

The UE shall report the measurement quantity (*reportQuantity*) and send periodic, semi-persistent or aperiodic reports, according to the *reportConfigType* according to the CSI reporting configuration(s) (*CSI-ReportConfig*) for the active BWP.

9.8.2 Requirements applicability

The requirements in clause 9.8 apply, provided:

- CMR resources configured for L1-SINR measurements are measurable, and
- NZP-IMR resources configured for L1-SINR measurements if applicable are measurable.

Requirements are defined for periodic, semi-persistent and aperiodic resources.

For CSI-RS based CMR and no dedicated IMR configured, a CSI-RS resource configured for L1-SINR shall be considered measurable when for each relevant CSI-RS the following conditions are met:

- L1-SINR related side conditions given in clauses 10.1.27 and 10.1.28 for FR1 and FR2, respectively, for a corresponding band,
- CSI-RS_{RP} and CSI-RS $\hat{E}_s/I_{ot}$ according to Annex B.2.8.1 for a corresponding band.

For SSB based CMR and dedicated IMR configured, a SSB and a dedicated IMR configured for L1-SINR shall be considered measurable when for each relevant SSB and IMR the following conditions are met:

- L1-SINR related side conditions given in clauses 10.1.27 and 10.1.28 for FR1 and FR2, respectively, for a corresponding band,
- SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.8.2 for a corresponding band.
- NZP-IMR $\hat{E}_s/I_{ot}$ according to Annex B.2.8.2 for a corresponding band, if NZP-IMR is configured as dedicated IMR.

For CSI-RS based CMR and dedicated IMR configured, a CSI-RS and a dedicated IMR configured for L1-SINR shall be considered measurable when for each relevant CSI-RS and IMR the following conditions are met:

- L1-SINR related side conditions given in clauses 10.1.27 and 10.1.28 for FR1 and FR2, respectively, for a corresponding band,
- CSI-RS_{RP} and CSI-RS $\hat{E}_s/I_{ot}$ according to Annex B.2.8.3 for a corresponding band

- NZP-IMR $\hat{E}_s/I_{ot}$ according to Annex B.2.8.3 for a corresponding band, if NZP-IMR is configured as dedicated IMR.

9.8.3 Measurement Reporting Requirements

The UE shall send L1-SINR reports only for report configurations configured for the active BWP.

The UE shall report the L1-SINR value as a 7-bit value in the range [-23, 40] dB with 0.5dB step size if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting* is enabled, the UE shall use differential L1-SINR based reporting. The differential L1-SINR is quantized to a 4-bit value with 1dB step size. The mapping between the reported L1-SINR value and the measured quantity is described in 10.1.16.

9.8.3.1 Periodic Reporting

Reported L1-SINR measurements contained in periodic L1-SINR measurement reports shall meet the requirements in clauses 10.1.27 for FR1 and 10.1.28 for FR2, respectively.

The UE shall transmit the periodic L1-SINR reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.8.3.2 Semi-Persistent Reporting

Reported L1-SINR measurements contained in a Semi-Persistent L1-SINR measurement report shall meet the requirements in clauses 10.1.27 for FR1 and 10.1.28 for FR2, respectively. This requirement applies for semi-persistent L1-SINR reports send on PUSCH or PUCCH.

The UE shall only send semi-persistent L1-SINR measurement reports on PUSCH, if a DCI for triggering report has been received.

The UE shall only send semi-persistent L1-SINR measurement reports on PUCCH, if an activation command as described in clause 6.1.3.16 in TS38.321 [7] has been received.

The UE shall transmit the semi-persistent L1-SINR reporting on PUSCH or PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.8.3.3 Aperiodic Reporting

Reported L1-SINR measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-SINR reports shall meet the requirements in clauses 10.1.x for FR1 and 10.1.x for FR2, respectively.

The UE shall only send aperiodic L1-SINR measurement reports, if a DCI for triggering report has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-SINR reporting on PUSCH over the air interface at the time specified according to clause 5.2.1.4 in TS 38.214 [26].

9.8.4 L1-SINR measurement requirements

9.8.4.1 L1-SINR reporting with CSI-RS based CMR and no dedicated IMR configured

dedicated resource configured as IMR for L1-SINR computation, and the UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1-SINR_Measurement_Period_CSI-RS_CMR_Only}$.

The value of $T_{L1-SINR_Measurement_Period_CSI-RS_CMR_Only}$ is defined in Table 9.8.4.1-1 for FR1 and in Table 9.8.4.1-2 for FR2, where

For the value of M,

- For periodic and semi-persistent CSI-RS resources as CMR, M=1 if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and M=3 otherwise;

- For aperiodic CSI-RS resources as CMR, $M=1$.

For the value of N in FR2

- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, $N=1$. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with
 - SSB for L1-RSRP or L1-SINR measurement, or
 - another CSI-RS in resource set configured with repetition ON.
- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, $N=\text{ceil}(\text{maxNumberRxBeam} / N_{\text{res_per_set}})$, where $N_{\text{res_per_set}}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured for all resources in the resource set.
- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, $N=1$. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource has QCL-TypeD with
 - SSB for L1-RSRP or L1-SINR measurement, or
 - another CSI-RS in resource set configured with repetition ON.
- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, $N=\text{ceil}(\text{maxNumberRxBeam} / N_{\text{res_per_set}})$, where $N_{\text{res_per_set}}$ is number of resources in the resource set. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set.
- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, $N=1$. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource has QCL-TypeD with
 - SSB for L1-RSRP or L1-SINR measurement, or
 - another CSI-RS in resource set configured with repetition ON.
- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, $N=1$. UE is not required to meet the accuracy requirements in clause 10.1.28.1 and 10.1.28.3 if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured for all resources in the resource set.

For a UE supporting *concurrentMeasGap-r17* and when concurrent gaps are configured,

- P value for a CSI-RS resource to be measured is defined as
 - $N_{\text{total}} / N_{\text{outside_MG}}$ in FR1
 - $P_{\text{sharing factor}} * N_{\text{total}} / N_{\text{outside_MG}}$ in FR2 with $N_{\text{available}} = 0$
 - $N_{\text{total}} / N_{\text{available}}$ in FR2 with $N_{\text{available}} > 0$
- For a window W of duration $\max(T_{L1}, \text{MGRP_max})$, where *MGRP_max* is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as serving cell, and starting at the beginning of any CSI-RS resource occasion:
 - N_{total} is the total number of CSI-RS resource occasions within the window W , including those overlapped with measurement gap occasions or SMTC occasions within the window W , and
 - $N_{\text{outside_MG}}$ is the number of CSI-RS resource occasions that are not overlapped with any measurement gap occasion within the window W
 - $N_{\text{available}}$ is the number of CSI-RS resource occasions that are not overlapped with any measurement gap occasion nor any SMTC occasion within the window W
 - T_{L1} is periodicity of the target CSI-RS.

Otherwise, for a UE not supporting *concurrentMeasGap-r17* or when concurrent gaps are not configured,

For the value of P in FR1,

- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{xRP}}$, when in the monitored cell there are GAP configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the CSI-RS; and
- $P=1$ when in the monitored cell there are no GAPs overlapping with any occasion of the CSI-RS.

For the value of P in FR2,

- $P=1$, when CSI-RS is not overlapped with GAP and also not overlapped with SMTC occasion.
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{xGP}}$, when CSI-RS is partially overlapped with GAP and CSI-RS is not overlapped with SMTC occasion ($T_{\text{CSI-RS}} < xRP$)
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when CSI-RS is not overlapped with GAP and CSI-RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$).
- P is $P_{\text{sharing factor}}$, when CSI-RS is not overlapped with GAP and CSI-RS is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$).
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{xGP} - \frac{T_{\text{CSI-RS}}}{T_{\text{SMTCperiod}}}}$, when CSI-RS is partially overlapped with GAP and CSI-RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with GAP and
 - $T_{\text{SMTCperiod}} \neq xRP$ or
 - $T_{\text{SMTCperiod}} = xRP$ and $T_{\text{CSI-RS}} < 0.5 * T_{\text{SMTCperiod}}$
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{xGP}}$, when CSI-RS is partially overlapped with GAP and CSI-RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is not overlapped with GAP and $T_{\text{SMTCperiod}} = xRP$ and $T_{\text{CSI-RS}} = 0.5 * T_{\text{SMTCperiod}}$
- $P = \frac{1}{1 - \frac{T_{\text{CSI-RS}}}{\min(T_{\text{SMTCperiod}}, xRP)}}$, when CSI-RS is partially overlapped with GAP ($T_{\text{CSI-RS}} < xRP$) and CSI-RS is partially overlapped with SMTC occasion ($T_{\text{CSI-RS}} < T_{\text{SMTCperiod}}$) and SMTC occasion is partially or fully overlapped with GAP.
- $P = \frac{P_{\text{sharing factor}}}{1 - \frac{T_{\text{CSI-RS}}}{xGP}}$, when CSI-RS is partially overlapped with GAP and CSI-RS is fully overlapped with SMTC occasion ($T_{\text{CSI-RS}} = T_{\text{SMTCperiod}}$) and SMTC occasion is partially overlapped with GAP ($T_{\text{SMTCperiod}} < xRP$)

Where:

$P_{\text{sharing factor}} = 1$, if the CSI-RS configured for L1-SINR measurement outside gap is

not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,

not overlapped by the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured.

- $P_{\text{sharing factor}} = 3$, otherwise.
- $T_{\text{SMTCperiod}}$ = the configured SMTC1 period or SMTC2 period if configured.
- $T_{\text{CSI-RS}}$ = the periodicity of CSI-RS configured for L1-SINR measurement

- If the UE is configured with Pre-MG, a CSI-RS resource or an SMTC occasion is only considered to be overlapped by the Pre-MG if the Pre-MG is activated.
- When a measurement gap is configured and the measurement gap is not NCSG,
 - a CSI-RS is considered to be overlapped with the GAP if it overlaps a measurement gap occasion, and
 - $xRP = MGRP$
- Otherwise, when NCSG measurement gap is configured,
 - a CSI-RS is considered to be overlapped with the GAP if
 - it overlaps the VIL1 or VIL2 of NCSG, or
 - it overlaps the ML of NCSG in FR2, and there exists a target carrier to be measured within NCSG that is intra-frequency carrier or inter-frequency carrier in the same band as the serving cell, or inter-frequency carrier in different band as the serving cell and UE does not support IBM between the target carrier and the serving cell,
 - and
 - $xRP = VIRP$
- When concurrent gaps are configured, a CSI-RS resource or an SMTC occasion is not considered to be overlapped by a gap occasion if the gap occasion is dropped according to clause 9.1.8.

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{SMTCperiod}$ corresponds to the value of higher layer parameter *smtc1*.

Note: The overlap between CSI-RS for L1-SINR measurement and SMTC means that CSI-RS for L1-SINR measurement is within the SMTC window duration.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and GAP configurations does not meet previous conditions.

Table 9.8.4.1-1: Measurement period $T_{L1-SINR_Measurement_Period_CSI-RS_CMR_Only}$ for FR1

Configuration	$T_{L1-SINR_Measurement_Period_CSI-RS_CMR_Only} (ms)$
non-DRX	$\max(T_{Report}, \text{ceil}(M \cdot P) \cdot T_{CSI-RS})$
DRX cycle $\leq 320ms$	$\max(T_{Report}, \text{ceil}(1.5 \cdot M \cdot P) \cdot \max(T_{DRX}, T_{CSI-RS}))$
DRX cycle $> 320ms$	$\text{ceil}(M \cdot P) \cdot T_{DRX}$
Note 1: T_{CSI-RS} is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	
Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3.	

Table 9.8.4.1-2: Measurement period $T_{L1-SINR_Measurement_Period_CSI-RS_CMR_Only}$ for FR2

Configuration	$T_{L1-SINR_Measurement_Period_CSI-RS_CMR_Only} (ms)$
non-DRX	$\max(T_{Report}, \text{ceil}(M \cdot P \cdot N) \cdot T_{CSI-RS})$
DRX cycle $\leq 320ms$	$\max(T_{Report}, \text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot \max(T_{DRX}, T_{CSI-RS}))$
DRX cycle $> 320ms$	$\text{ceil}(M \cdot P \cdot N) \cdot T_{DRX}$
Note 1: T_{CSI-RS} is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	
Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3.	

9.8.4.2 L1-SINR reporting with SSB based CMR and dedicated IMR configured

The UE shall be capable of performing L1-SINR measurements with the SSB configured as CMR and dedicated resource configured as IMR for L1-SINR computation, in which the NZP-CSI-RS or CSI-IM resource configured as

dedicated IMR shall be 1-to-1 mapped to SSB configured as CMR, with the same periodicity. The UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1-SINR_Measurement_Period_SSB_CMR_IMR}$.

The requirements in this clause are not applicable if NZP-CSI-RS or CSI-IM resource configured as dedicated IMR is scheduled with different periodicity as SSB configured as CMR.

The value of $T_{L1-SINR_Measurement_Period_SSB_CMR_IMR}$ is defined in Table 9.8.4.2-1 for FR1 and in Table 9.8.4.2-2 for FR2 when *highSpeedMeasFlagFR2-r17* is not configured, and defined in Table 9.8.4.2-3 for FR2 power class 6 UE when *highSpeedMeasFlagFR2-r17* is configured, where

For the value of M

- For periodic or semi-persistent NZP CSI-RS or CSI-IM resource as dedicated IMR, M=1 if the higher layer parameters *timeRestrictionForChannelMeasurements* and/or *timeRestrictionForInterferenceMeasurements* are configured, and M=3 otherwise;

For the value of N in FR2

- N = 8.

P is defined as the maximum value between P_{CMR} and P_{IMR} , i.e., $P = \max(P_{CMR}, P_{IMR})$, where

- the value of P_{CMR} shall be derived in the same way as the value of P used for SSB based L1-RSRP measurement in clause 9.5.4.1, in which the occasions and period of the SSB for CMR shall be used instead.
- the value of P_{IMR} shall be derived in the same way as the value of P used for CSI-RS based L1-RSRP measurement in clause 9.5.4.2, in which the occasions and period of the NZP CSI-RS for NZP-IMR or CSI-IM for ZP-IMR shall be used instead.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet previous conditions.

For L1-SINR measurement with SSB as CMR and CSI-RS or CSI-IM as IMR, the requirement shall apply if the CSI-RS is configured as IMR with repetition field as “repetition = OFF” or CSI-IM is configured as IMR.

For L1-SINR measurement with SSB as CMR and CSI-RS/CSI-IM as IMR, no requirement shall apply if SSB occasions for CMR or CSI-RS/CSI-IM occasions for IMR are fully overlapped with the configured measurement gap

Table 9.8.4.2-1: Measurement period $T_{L1-SINR_Measurement_Period_SSB_CMR_IMR}$ for FR1

Configuration	$T_{L1-SINR_Measurement_Period_SSB_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M \cdot P) \cdot T_{SSB})$
DRX cycle ≤ 320 ms	$\max(T_{Report}, \text{ceil}(1.5 \cdot M \cdot P) \cdot \max(T_{DRX}, T_{SSB}))$
DRX cycle > 320 ms	$\text{ceil}(M \cdot P) \cdot T_{DRX}$
Note 1: T_{SSB} = <i>ssb-periodicityServingCell</i> is the periodicity of the SSB-Index configured for L1-SINR channel measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	
Note 2: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to SSB configured for channel measurement, with the same periodicity.	

Table 9.8.4.2-2: Measurement period $T_{L1-SINR_Measurement_Period_SSB_CMR_IMR}$ for FR2

Configuration	$T_{L1-SINR_Measurement_Period_SSB_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M \cdot P \cdot N) \cdot T_{SSB})$
DRX cycle ≤ 320 ms	$\max(T_{Report}, \text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot \max(T_{DRX}, T_{SSB}))$
DRX cycle > 320 ms	$\text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot T_{DRX}$
Note 1: T_{SSB} = <i>ssb-periodicityServingCell</i> is the periodicity of the SSB-Index configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	
Note 2: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to SSB configured for channel measurement, with the same periodicity.	

Table 9.8.4.2-3: Measurement period $T_{L1-SINR_Measurement_Period_SSB_CMR_IMR}$ configured with *highSpeedMeasFlagFR2-r17* for FR2

Configuration	$T_{L1-SINR_Measurement_Period_SSB_CMR_IMR}$ (ms)
non-DRX	$\max(T_{Report}, \text{ceil}(M \cdot P \cdot N_1^{\text{Note 3}}) \cdot T_{SSB})$
DRX cycle $\leq 80\text{ms}$	$\max(T_{Report}, \text{ceil}(M \cdot P \cdot N_1^{\text{Note 3}} \cdot M_2) \cdot \max(T_{DRX}, T_{SSB}))$
$80\text{ms} < \text{DRX cycle} \leq 320\text{ms}$	$\max(T_{Report}, \text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot \max(T_{DRX}, T_{SSB}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot T_{DRX}$
Note 1: T_{SSB} = ssb-periodicityServingCell is the periodicity of the SSB-Index configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to SSB configured for channel measurement, with the same periodicity. Note 3: $N_1 = 2$ when <i>highSpeedMeasFlagFR2-r17</i> = set1; $N_1 = 6$ when <i>highSpeedMeasFlagFR2-r17</i> = set2. Note 4: $M_2 = 1.5$ if SMTTC periodicity > 40 ms; otherwise $M_2 = 1$	

9.8.4.3 L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured

The UE shall be capable of performing L1-SINR measurements with the CSI-RS resource configured as CMR and dedicated resource configured as IMR for L1-SINR computation, in which the NZP-CSI-RS or CSI-IM resource configured as dedicated IMR shall be 1-to-1 mapped to CSI-RS resource configured as CMR, with the same periodicity. The UE physical layer shall be capable of reporting L1-SINR measured over the measurement period of $T_{L1-SINR_Measurement_Period_CSI-RS_CMR_IMR}$.

$T_{L1-SINR_Measurement_Period_CSI-RS_CMR_IMR}$

The requirements in this clause are not applicable if NZP-CSI-RS or CSI-IM resource configured as dedicated IMR is scheduled with different periodicity as CSI-RS resource configured as CMR.

The value of $T_{L1-SINR_Measurement_Period_CSI-RS_CMR_IMR}$ is defined in Table 9.8.4.3-1 for FR1 and in Table 9.8.4.3-2 for FR2, where

For the value of M,

- M=1 shall be applied if
 - aperiodic NZP-CSI-RS as CMR or dedicated IMR, or
 - aperiodic CSI-IMR as dedicated IMR, or
 - periodic and semi-persistent NZP-CSI-RS as CMR or dedicated IMR and the higher layer parameters *timeRestrictionForChannelMeasurement* and/or *timeRestrictionForInterferenceMeasurements* are configured, or
 - periodic and semi-persistent CSI-IM as dedicated IMR and the higher layer parameters *timeRestrictionForChannelMeasurement* and/or *timeRestrictionForInterferenceMeasurements* are configured;
- M=3 otherwise.

For the value of N in FR2

- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, $N=1$. The requirements apply if *qcl-InfoPeriodicCSI-RS* is configured for all the resources in the resource set and for each resource one RS has QCL-TypeD with
 - SSB for L1-RSRP or L1-SINR measurement, or
 - another CSI-RS in resource set configured with repetition ON.
- For periodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, $N = \text{ceil}(\text{maxNumberRxBeam} / N_{\text{res_per_set}})$, where $N_{\text{res_per_set}}$ is number of resources in the resource set. The requirements apply provided *qcl-InfoPeriodicCSI-RS* is configured for all resources in the resource set.

- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, $N=1$. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set and for each resource has QCL-TypeD with
 - SSB for L1-RSRP or L1-SINR measurement, or
 - another CSI-RS in resource set configured with repetition ON.
- For semi-persistent CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, $N=\text{ceil}(\text{maxNumberRxBeam} / N_{\text{res_per_set}})$, where $N_{\text{res_per_set}}$ is number of resources in the resource set. The requirements apply provided TCI state is provided for all resources in the resource set in the MAC CE activating the resource set.
- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to OFF, $N=1$. The requirements apply provided *qcl-info* is configured for all resources in the resource set and for each resource has QCL-TypeD with
 - SSB for L1-RSRP or L1-SINR measurement, or
 - another CSI-RS in resource set configured with repetition ON.
- For aperiodic CSI-RS resources as CMR in a resource set configured with higher layer parameter *repetition* set to ON, $N=1$. UE is not required to meet the accuracy requirements in clause 10.1.28.1 and 10.1.28.3 if number of resources in the resource set is smaller than *maxNumberRxBeam*. The requirements apply provided *qcl-info* is configured for all resources in the resource set.

P is defined as the maximum value between P_{CMR} and P_{IMR} , i.e., $P = \max(P_{\text{CMR}}, P_{\text{IMR}})$, where

- The value of P_{CMR} and P_{IMR} shall be derived in the same way as the value of P used for CSI-RS based L1-RSRP measurement in clause 9.5.4.2, in which the occasions and period of the CSI-RS for CMR and NZP CSI-RS for NZP-IMR or CSI-IM for ZP-IMR shall be used instead respectively.

Longer evaluation period would be expected if the combination of CSI-RS, SMTC occasion and measurement gap configurations does not meet previous conditions.

For L1-SINR measurement with CSI-RS as CMR and CSI-RS as IMR, the requirement shall apply only if CSI-RS resources as CMR and IMR are configured with the same repetition field and the number of CSI-RS resources in the resource sets for CMR and IMR are same.

For L1-SINR measurement with CSI-RS as CMR and CSI-IM as IMR, the requirement shall apply only if the number of CSI-RS resources in the resource set for CMR and the number of CSI-IM resources in the resource set for IMR are same.

For L1-SINR measurement with CSI-RS as CMR and CSI-RS/CSI-IM as IMR, no requirement shall apply if CSI-RS occasions for CMR or CSI-RS/CSI-IM occasions for IMR are fully overlapped with the configured measurement gap.

Table 9.8.4.3-1: Measurement period $T_{\text{L1-SINR_Measurement_Period_CSI-RS_CMR_IMR}}$ for FR1

Configuration	$T_{\text{L1-SINR_Measurement_Period_CSI-RS_CMR_IMR}}$ (ms)
non-DRX	$\max(T_{\text{Report}}, \text{ceil}(M \cdot P) \cdot T_{\text{CSI-RS}})$
DRX cycle $\leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(1.5 \cdot M \cdot P) \cdot \max(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M \cdot P) \cdot T_{\text{DRX}}$
Note 1: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3. Note 3: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to CSI-RS configured for channel measurement, with the same periodicity.	

Table 9.8.4.3-2: Measurement period $T_{\text{L1-SINR_Measurement_Period_CSI-RS_CMR_IMR}}$ for FR2

Configuration	$T_{\text{L1-SINR_Measurement_Period_CSI-RS_CMR_IMR}}$ (ms)
---------------	--

non-DRX	$\max(T_{\text{Report}}, \text{ceil}(M \cdot P \cdot N) \cdot T_{\text{CSI-RS}})$
DRX cycle $\leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot \max(T_{\text{DRX}}, T_{\text{CSI-RS}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M \cdot P \cdot N) \cdot T_{\text{DRX}}$
Note 1: $T_{\text{CSI-RS}}$ is the periodicity of CSI-RS configured for L1-SINR measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting. Note 2: the requirements are applicable provided that the CSI-RS resource configured for L1-SINR measurement is transmitted with Density = 3. Note 3: The requirements are applicable provided that the CSI-RS resource configured for interference measurement shall be 1-to-1 mapped to CSI-RS configured for channel measurement, with the same periodicity.	

9.8.5 Measurement restriction for L1-SINR measurement

The UE is required to be capable of measuring L1-SINR without measurement gaps. The UE is required to perform the SSB and CSI-RS/CSI-IM measurements with measurement restrictions as described in the following clauses.

9.8.5.1 Measurement restriction if SSB configured for L1-SINR Measurement

For FR1, when the SSB configured as CMR for L1-SINR measurement is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-SINR measurement without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for L1-SINR measurement without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for L1-SINR measurement and CSI-RS. Longer measurement period for SSB based L1-SINR measurement is expected, and no requirements are defined.

For FR2, when the SSB configured as CMR for L1-SINR measurement on one CC is in the same OFDM symbol as CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for L1-SINR measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, there is no measurement restriction allowed when the network configures mixed numerology between SSB configured as CMR for L1-SINR measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, provided that UE is capable of independent beam management on this FR2 band pair.

9.8.5.2 Measurement restriction if CSI-RS configured for L1-SINR measurement

For both FR1 and FR2, when the CSI-RS configured for L1-SINR measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE is not required to receive CSI-RS for L1-SINR measurement in the PRBs that overlap with an SSB.

For FR1, when the SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement is within the active BWP and has same SCS than CSI-RS configured for L1-SINR measurement, the UE shall be able to perform CSI-RS measurement without restrictions.

For FR1, when the SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement is within the active BWP and has different SCS than CSI-RS configured for L1-SINR measurement, the UE shall be able to perform CSI-RS measurement with restrictions according to its capabilities:

- If the UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to perform CSI-RS measurement without restrictions.

- If the UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both CSI-RS for L1-SINR measurement and SSB. Longer measurement period for CSI-RS based L1-SINR measurement is expected, and no requirements are defined.

For FR1, when the CSI-RS configured for L1-SINR measurement is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE shall be able to measure the CSI-RS for L1-SINR measurement without any restriction.

For FR2, when the CSI-RS configured for L1-SINR measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-RS for L1-SINR measurement and SSB. Longer measurement period for CSI-RS based L1-SINR measurement is expected, and no requirements are defined.

For FR2, when the CSI-RS configured for L1-SINR measurement on one CC is in the same OFDM symbol as another CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-RS for L1-SINR measurement and the other CSI-RS. Longer measurement period for CSI-RS based L1-SINR measurement is expected, and no requirements are defined.
 - The CSI-RS for L1-SINR measurement or the other CSI-RS in a resource set configured with repetition ON, or
 - The CSI-RS or the other CSI-RS is configured as dedicated IMR for L1-SINR computation with SSB as CMR, or
 - The other CSI-RS is configured in q1 and beam failure is detected, or
 - The two CSI-RS-es are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-RS configured for L1-SINR measurement without any restriction.

9.8.5.3 Measurement restriction if CSI-IM configured for L1-SINR measurement

For both FR1 and FR2, when the CSI-IM configured for L1-SINR measurement is in the same OFDM symbol as SSB for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement, UE is not required to measure CSI-IM for L1-SINR measurement in the PRBs that overlap with an SSB.

For FR1, UE shall be able to measure the CSI-IM configured for L1-SINR measurement without any restriction.

For FR2, when the CSI-IM configured for L1-SINR measurement on one CC is in the same OFDM symbol as SSB for RLM, BFD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band, or in the same symbol as SSB for CBD measurement on the same CC or different CCs in the same band when beam failure is detected, UE is required to measure one of but not both CSI-IM for L1-SINR measurement and SSB. Longer measurement period for L1-SINR measurement is expected, and no requirements are defined.

For FR2, when the CSI-IM configured for L1-SINR measurement on one CC is in the same OFDM symbol as the CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the same CC or different CCs in the same band,

- In the following cases, UE is required to measure one of but not both CSI-IM for L1-SINR measurement and CSI-RS. Longer measurement period for L1-SINR measurement is expected, and no requirements are defined.
 - The CSI-RS in a resource set configured with repetition ON, or
 - The CSI-IM or the CSI-RS is configured as dedicated IMR for L1-SINR computation with SSB as CMR, or
 - The CSI-RS is configured in q1 and beam failure is detected, or
 - The CMR for L1-SINR measurement and the CSI-RS are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE,
- Otherwise, UE shall be able to measure the CSI-IM configured for L1-SINR measurement without any restriction.

9.8.6 Scheduling availability of UE during L1-SINR measurement

Scheduling availability restrictions when the UE is performing L1-SINR measurement are described in the following clauses.

9.8.6.1 Scheduling availability of UE performing L1-SINR measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-SINR measurement performed on SSB and CSI-RS configured for L1-SINR measurement with the same SCS as PDSCH/PDCCH in FR1.

9.8.6.2 Scheduling availability of UE performing L1-SINR measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-SINR measurement based on SSB configured for L1-SINR measurement. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-SINR measurement based on SSB configured for L1-SINR measurement.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking /CSI-RS for CQI on SSB symbols to be measured for L1-SINR measurement.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions on serving cell where L1-SINR measurement is performed apply to all serving cells in the same band on the symbols that fully or partially overlap with restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 serving cell(s) configured in other bands than the bands in which the serving cell where L1-SINR measurement is performed is configured.

9.8.6.3 Scheduling availability of UE performing L1-SINR measurement on FR2

The following scheduling restriction applies due to L1-SINR measurement.

- For the cases of CSI-RS used for L1-SINR measurement of CSI-RS based CMR only case and CSI-RS based CMR plus CSI-RS based ZP-IMR/NZP-IMR case and CSI-RS based CMR plus ZP-IMR case, where CSI-RS is QCLed with active TCI state for PDCCH/PDSCH and not in a CSI-RS resource set with repetition ON, and N=1 applies as specified in clause 9.8.4
- There are no scheduling restrictions due to L1-SINR measurement performed based on the CSI-RS.
- Otherwise
 - The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on the symbols to be measured for L1-SINR for FR2 power class 6 UE which is not configured with *highSpeedMeasFlagFR2-r17*, and for the UE not supporting FR2 power class 6;
 - The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on the symbols to be measured for L1-SINR, and on 1 data symbol before symbols to be measured for L1-SINR and 1 data symbol after symbols to be measured for L1-SINR for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*.

When intra-band carrier aggregation is performed, the scheduling restrictions on serving cell where L1-SINR measurement is performed apply to all serving cells in the band on the symbols that fully or partially overlap with restricted symbols.

If following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

for the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE shall receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for L1-SINR measurement; and

for the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE shall receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for L1-SINR measurement.

9.8.6.4 Scheduling availability of UE performing L1-SINR measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 serving cell(s) due to L1-SINR measurement performed on FR2 serving cell(s).

There are no scheduling restrictions on FR2 serving cell(s) due to L1-SINR measurement performed on FR1 serving cell(s).

9.9 NR measurements for positioning

9.9.1 Introduction

This clause contains requirements for UE capable of performing NR positioning measurements defined in TS 38.215 [4], including RSTD, PRS-RSRP, UE Rx-Tx time difference, NR E-CID, and PRS-RSRPP measurements.

9.9.1.1 General Aspects of Gap-based Measurement

For gap-based RSTD, PRS-RSRP, UE Rx-Tx time difference, and PRS-RSRPP measurements, the requirements in clauses 9.9.2.5, 9.9.3.5, 9.9.4.5 and 9.9.6.5 apply provided:

- the UE is configured or pre-configured with measurement gaps or configured with concurrent measurement gaps
- all positioning frequency layers are measured or associated with only one per-UE measurement gap, or
- for the UE supporting *independentGapConfigPRS-r17*, all positioning frequency layers in the same FR are measured or associated with only one per-FR measurement gap in the corresponding FR.
- if the measurement gap is pre-configured, the gap must be activated throughout the measurement period, and
- if concurrent measurement gaps are configured, one of the gap combinations specified in clause 9.1.8.2 is configured, and
- if the UE does not support *independentGapConfigPRS-r17*, the configured or pre-configured gap used to perform the PRS measurements must be of per-UE type, and
- No active BWP switching occurs during the measurement gaps for PRS measurement, and

All measurement requirements specified in clause 9.9.2.5, 9.9.3.5, 9.9.4.5 and 9.9.6.5 shall apply without DRX as well as for any DRX configuration specified in TS 38.331 [2].

UE is only required to measure PRS resources that are fully or partially overlapped with measurement gaps, and the requirements in clause 9.9.2.5, 9.9.3.5, 9.9.4.5 and 9.9.6.5 are applicable to PRS resources that are fully or partially overlapped with measurement gaps.

A PRS resource is considered to be fully (partially) overlapped with measurement gaps if all (some) of its instances are overlapped with a measurement gap occasion. A PRS resource instance is considered to be overlapped with measurement gap occasion if the minimum number of unmuted repetitions of the instance taking into account *nr-DL-PRS-ExpectedRSTD-Uncertainty* and *nr-DL-PRS-ExpectedRSTD* is fully covered by the MGL excluding RF switching time, where the minimum number is given in the accuracy requirements in clause 10.1.23, 10.1.24, 10.1.25 and 10.1.38 for RSTD, PRS-RSRP, UE Rx-Tx time difference and PRS-RSRPP, respectively.

When UE is configured with measurement for more than one positioning requests, the measurement period for each request may be longer than measurement period when UE is configured with measurement for single positioning request.

If a positioning measurement gap is configured via *PosGapConfig* and activated by MAC CE, the measurement requirements in clause 9.9.2.5, 9.9.3.5, 9.9.4.5 and 9.9.6.5 apply provided that no other MGs are configured, and only one measurement gap configured via *PosGapConfig* is activated.

9.9.1.2 General Aspects of Gapless Measurement

The requirements for RSTD, PRS-RSRP, UE Rx-Tx time difference, and PRS-RSRPP measurement without measurement gaps specified in clauses 9.9.2.7, 9.9.3.6, 9.9.4.6 and 9.9.6.6 shall apply provided that:

Positioning frequency layer to be measured is within an active BWP,

UE is configured with PPW, and the PPW for the active BWP containing the positioning frequency layer to be measured is activated,

No active BWP switching occurs during the measurement period specified in clauses 9.9.2.7, 9.9.3.6, 9.9.4.6 and 9.9.6.6,

PRS is within PPW and does not overlap with other signals/channels of higher priority,

- for PPW type 1A/1B, the PPW does not overlap with any symbol for SSB-based RLM/BFD/CBD/L1-RSRP/L1-SINR measurement on any CC or for SSB based RRM measurement on any MOs that are measured outside measurement gaps,
- for PPW type 2, PRS does not overlap with any symbol for SSB-based RLM/BFD/CBD/L1-RSRP/L1-SINR measurement on any CC or for SSB based RRM measurement on any MOs that are measured outside measurement gaps,

$\max |\Delta T| \leq \text{THR}$, where

ΔT is the time difference between the start of a slot containing PRS from the neighbor cell/TRP and the start of the closest slot from the serving cell;

the range of ΔT is determined by the expected RSTD and expected RSTD uncertainty in the assistance data;

THR is the threshold as reported in UE capability *prs-MeasurementWithoutMG-r17*.

SCS of PRS within PPW and SCS of DL active BWP are the same.

All measurement requirements specified in clauses 9.9.2.7, 9.9.3.6, 9.9.4.6 and 9.9.6.6 shall apply without DRX as well as for any DRX configuration specified in TS 38.331 [2].

The UE is not required to perform additional SSB measurement for the SSB configured as QCL source of PRS resources.

The UE is only required to measure PRS resources that are unmuted and fully or partially overlapped with PPW, and the requirements in clauses 9.9.2.7, 9.9.3.6, 9.9.4.6 and 9.9.6.6 are applicable to PRS resources that are unmuted and fully or partially overlapped with PPW.

A PRS resource is considered to be fully (partially) overlapped with PPW if all (some) of its instances are overlapped with a PPW occasion. A PRS resource instance is considered to be overlapped with PPW occasion if the minimum number of unmuted repetitions of the instance taking into account Rx time difference between serving and non-serving cell is fully covered by the PPW, where the minimum number is given in the accuracy requirements in clause 10.1.23, 10.1.24, 10.1.25 and 10.1.38 for RSTD, PRS-RSRP, UE Rx-Tx time difference and PRS-RSRPP, respectively.

When UE is configured with measurement for more than one positioning requests, the measurement period for each request may be longer than measurement period when UE is configured with measurement for single positioning request.

9.9.1.3 Scheduling Availability of UE during PRS Measurement without Measurement Gaps

The requirements in this clause apply for UE performing RSTD, PRS-RSRP, UE Rx-Tx time difference and PRS-RSRPP measurement without measurement gaps.

If *prs-ProcessingWindowType1A-r17* UE capable of supporting priority options 1, 2 and 3 is configured with a *type1A* PRS processing window with priority value '*st1*' for PRS measurement, then UE is not expected to receive PDCCH/PDSCH/CSI-RS on all symbols within PRS processing window.

If *prs-ProcessingWindowType1A-r17* UE capable of supporting priority option 2 is configured with a *type1A* PRS processing window with priority value '*st2*' for PRS measurement, then UE is not expected to receive PDSCH/CSI-RS on all symbols within PRS processing window but shall receive PDCCH and URLLC PDSCH within PRS processing window.

If *prs-ProcessingWindowType1B-r17* UE capable of supporting priority options 1, 2 and 3 is configured with a *type1B* PRS processing window with priority value '*st1*' for PRS measurement, then UE is not expected to receive PDCCH/PDSCH/CSI-RS from a certain band on all symbols within PRS processing window.

If *prs-ProcessingWindowType1B-r17* UE capable of supporting priority option 2 is configured with a *type1B* PRS processing window with priority value '*st2*' for PRS measurement, then UE is not expected to receive PDSCH/CSI-RS from a certain band but shall receive PDCCH and URLLC PDSCH from a certain band on all symbols within PRS processing window.

If *prs-ProcessingWindowType2-r17* UE capable of supporting priority options 1, 2 and 3 is configured with a *type2* PRS processing window with priority value '*st1*' for PRS measurement, then the UE is not expected to receive PDCCH/PDSCH/CSI-RS on the symbols overlapped with DL PRS within PRS processing window.

If *prs-ProcessingWindowType2-r17* UE capable of supporting priority option 2 is configured with a *type2* PRS processing window with priority value '*st2*' for PRS measurement, then UE is not expected to receive PDSCH/CSI-RS on the symbols overlapped with DL PRS within PRS processing window but shall receive PDCCH and URLLC PDSCH on the symbols overlapped with DL PRS within PRS processing window.

When PRS is lower priority than the DL signals/channels the following applies when UEs have an activated PRS processing window with *type1A* or *type1B*:

- If UE determines the presence of other DL signals/channels except SSB of higher priority than PRS in the PPW no later than N_2 symbols, defined in clause 6.4 of [26, TS38.214] for the subcarrier spacing μ of the DL PRS, before the start of the PPW, UE expects to receive the DL signals/channels and drop all DL PRS in the PPW.
- If UE determines the presence of other DL signals/channels except SSB of higher priority than PRS in the PPW later than N_2 symbols, defined in clause 6.4 of [26, TS38.214] for the subcarrier spacing μ of the DL PRS, before the start of the PPW, UE is not required to receive the other DL signals/channels except SSB of higher priority and may receive the DL PRS in the PPW.

When PRS is lower priority than the DL signals/channels the following applies when UEs have an activated PRS processing window with *type2*:

- If UE determines the presence of other DL signals/channels except SSB of higher priority than PRS on a PRS symbol no later than N_2 symbols, defined in clause 6.4 of [26, TS38.214] for the subcarrier spacing μ of the DL PRS, before the PRS symbol, UE expects to receive the DL signals/channels and drop the PRS symbol.
- If UE determines the presence of other DL signals/channels except SSB of higher priority than PRS on a PRS symbol later than N_2 symbols, defined in clause 6.4 of [26, TS38.214] for the subcarrier spacing μ of the DL PRS, before the PRS symbol, UE is not required to receive the other DL signals/channels except SSB of higher priority and may receive the PRS symbol.

For inter-band case for FR2 for the DL signals/channels from a different FR2 band than the FR2 band of the DL PRS, if the same Rx beam is used for both FR2 bands and the DL PRS is determined to be higher priority, UEs are not expected to receive the DL signals/channels if they are expected to measurement the DL PRS in a configured DL PRS processing window with *type1B* or *type2*.

9.9.2 RSTD measurements

9.9.2.1 Introduction

The requirements in clause 9.9.2 shall apply provided the UE has received *NR-DL-TDOA-RequestLocationInformation* message from LMF via LPP [34] requesting the UE to measure and report DL RSTD measurements defined in TS 38.215 [4].

9.9.2.2 Requirements Applicability

The requirements in clause 9.9.2 apply for periodic and triggered RSTD measurements, provided:

- PRS-RSTD related side conditions given in clause 10.1.23 for FR1 and FR2 are fulfilled, for a corresponding Band.

9.9.2.3 Measurement Capability

UE PRS RSTD measurement capability is as indicated by the UE in *NR-DL-TDOA-ProvideCapabilities*, according to TS 37.355[34].

9.9.2.4 Measurement Reporting Requirements

The measurement reporting delay is defined as the time between the moment when the periodic measurement report is triggered and the moment when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

The reported RSTD measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in clauses 10.1.23.3.

The RSTD measurements performed and reported according to this section shall meet the RSTD measurement accuracy requirements in clause 10.1.23, for each measured DL PRS resource.

9.9.2.4.1 Void

9.9.2.4.2 Void

9.9.2.4.3 Void

9.9.2.5 Measurements Period Requirements

When physical layer receives last of *NR-TDOA-ProvideAssistanceData* message and *NR-TDOA-RequestLocationInformation* message from LMF via LPP [34], the UE shall be able to measure multiple (up to the UE capability specified in Clause 9.9.2.3) DL RSTD measurements, defined in TS 38.215 [4], during the measurement period $T_{RSTD,Total}$ defined as:

$$T_{RSTD,Total} = \sum_{i=1}^L T_{RSTD,i} + (L - 1) * \max(T_{effect,i})$$

Where ,

i is the index of positioning frequency layer,

L is total number of positioning frequency layers, and

$T_{effect,i}$ is the periodicity of the PRS RSTD measurement in positioning frequency layer i

$T_{RSTD,i}$ is the measurement period for PRS RSTD measurement in positioning frequency layer i as specified below:

$$T_{\text{RSTD},i} = \left(k_{\text{multiTEG},i} * \text{CSSF}_{\text{PRS},i} * \text{ceil}(K_{\text{p,PRS},i}) * N_{\text{RxBeam},i} * \left\lceil \frac{N_{\text{PRS},i}^{\text{slot}}}{N'} \right\rceil \left\lceil \frac{L_{\text{available_PRS},i}}{N} \right\rceil * N_{\text{sample}} - 1 \right) * T_{\text{effect},i} + T_{\text{last},i}$$

where:

$N_{\text{RxBeam},i}$ is the UE Rx beam sweeping factor. In FR1, $N_{\text{RxBeam},i} = 1$;

and in FR2, $N_{\text{RxBeam},i}$ is equal to the value reported by the UE in *supportedLowerRxBeamSweepingFactor-FR2* if the UE supports the capability for the band containing positioning frequency layer i , and the LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-DL-TDOA-RequestLocationInformation*. $N_{\text{RxBeam},i}$ is equal to 8, otherwise.

$\text{CSSF}_{\text{PRS},i}$ is the carrier-specific scaling factor for NR PRS-based positioning measurements in positioning frequency layer i as defined in clause 9.1.5.2.

$k_{\text{multiTEG},i}$ is the scaling factor for measurement of same PRS resource with multiple Rx TEGs.

$k_{\text{multiTEG},i}=1$ if UE is not requested by LMF to measure a PRS resource with multiple Rx TEGs via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34] in *NR-DL-TDOA-RequestLocationInformation*;

otherwise,

$k_{\text{multiTEG},i}=N_{\text{TEG},i}$, if UE is not capable of receiving same DL PRS resource simultaneously from multiple Rx TEGs, and

$k_{\text{multiTEG},i}=\left\lceil \frac{N_{\text{TEG},i}}{k_{\text{TEG,simul},i}} \right\rceil$ if UE is capable of receiving the same DL PRS resource simultaneously from multiple Rx TEGs.

where

$N_{\text{TEG},i}$ is the number of Rx TEGs with which UE is requested to measure a PRS resource indicated via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34] in *NR-DL-TDOA-RequestLocationInformation*, and in case 'n0' is indicated, $N_{\text{TEG},i}$ is the maximum number of Rx TEGs with which UE can support to measure the same PRS resource as reported in *NR-UE-TEG-Capability*, and

$k_{\text{TEG,simul},i}$ is the number of Rx TEGs UE can measure simultaneously which is reported via *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul*.

$K_{\text{p,PRS},i}$ is a scaling factor for a positioning frequency layer to be measured within the associated measurement gap pattern, which is defined as $K_{\text{p,PRS},i} = N_{\text{total}} / N_{\text{available}}$ for UE configured with concurrent measurement gap, and $K_{\text{p,PRS},i} = 1$ for UE not configured with concurrent measurement gaps.

- For a window W of duration $\max(T_{\text{PRS},i}, \text{MGRP_max})$, where MGRP_max is the maximum MGRP across all configured per-UE MG and per-FR MG within the same FR as the positioning frequency layer, and starting at the beginning of any associated gap occasions covering the PRS occasion:
 - N_{total} is the total number of associated gap occasions covering PRS occasions within the window, including both dropped and non-dropped instances of the associated measurement gap within the window, and
 - $N_{\text{available}}$ is the number of non-dropped associated gap occasions covering PRS occasions within the window W , after further accounting for MG collisions by applying the selected gap collision rule
 - Requirements do not apply if $N_{\text{available}}=0$.

$N_{\text{PRS},i}^{\text{slot}}$ is the maximum number of DL PRS resources in positioning frequency layer i configured in a slot.

$L_{\text{available_PRS},i}$ is the time duration of available PRS in the positioning frequency layer i to be measured during $T_{\text{available_PRS},i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{\text{available_PRS},i}$, only the PRS resources unmuted and fully or partially overlapped with MG are considered.

N_{sample} is the number of PRS RSTD measurement samples, where

- $N_{sample} = 1$ if the UE supports *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and meets the following conditions:
 - PRS bandwidth is within the active BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
- $N_{sample} = 2$ if the UE supports *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and does not meet the following conditions:
 - PRS bandwidth is within the active BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
- $N_{sample} = 4$ otherwise.

$T_{last,i}$ is the measurement duration for the last PRS RSTD sample in positioning frequency layer i , including the sampling time and processing time. If all of the PRS resources to be measured are available in the same MG occasion during $T_{available}$, $T_{last,i} = T_i + MGL$. Otherwise, $T_{last,i} = T_i + T_{available_PRS,i}$,

$T_{effect,i}$ is the periodicity of the PRS RSTD measurement in positioning frequency layer i defined as:

$$T_{effect,i} = \left\lceil \frac{T_i}{T_{available_PRS,i}} \right\rceil * T_{available_PRS,i}$$

Where,

T_i corresponds to *durationOfPRS-ProcessingSymbolsInEveryTms* in TS 37.355 [34],

$T_{available_PRS,i} = LCM(T_{PRS,i}, MGRP_i)$, the least common multiple between $T_{PRS,i}$ and $MGRP_i$.

$MGRP_i$ is the repetition periodicity of the measurement gap applicable for measurement in the PRS frequency layer i . $T_{PRS,i}$ is the periodicity of DL PRS resource with muting on positioning frequency layer i .

If more than one PRS periodicities are configured in positioning frequency layer i , the least common multiple of PRS periodicities $T_{per}^{PRS \text{ with muting}}$ among all DL PRS resource sets in the positioning frequency layer is used to derive $T_{PRS,i}$, where,

$T_{per}^{PRS \text{ with muting}} = N_{muting} * T_{per}^{PRS}$, is the PRS periodicity with muting per PRS resource,

T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*.

N_{muting} is the scaling factor considering PRS resource muting. $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where

T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$ which is given by the higher-layer parameter *NR-MutingPattern-r16* included in *DL-PRS-MutingOption1-r16*.

- Note: For the purpose of calculating $T_{PRS,i}$, only the PRS resources fully or partially covered by the MG are considered.

$\{N, T\}$ is UE capability combination per band where N is a duration of DL PRS symbols in ms corresponding to *durationOfPRS-ProcessingSymsbols* in TS 37.355 [34] processed every T ms corresponding to *durationOfPRS-ProcessingSymbolsInEveryTms* in TS 37.355 [34] for a given maximum bandwidth supported by UE corresponding to *supportedBandwidthPRS* in TS 37.355 [34].

N' is UE capability for number of DL PRS resources that it can process in a slot as indicated by *maxNumOfDL-PRS-ResProcessedPerSlot* specified in TS 37.355 [34].

Except for deferred MT-LR as defined in clause 4.1a.5 [TS 23.273], the time $T_{RSTD,Total}$ starts from the first MG instance aligned with a DL PRS resource(s) in the assistance data after both the *NR-TDOA-ProvideAssistanceData* message and *NR-TDOA-RequestLocationInformation* message are delivered from LMF to the physical layer of UE via LPP [34].

For deferred MT-LR with other event than “Periodic Location” as defined in clause 4.1a.5.1 [TS 23.273], the time $T_{RSTD,Total}$ starts from the first MG instance aligned with a DL PRS resource(s) in the assistance data after the associated event(s) occurs.

For deferred MT-LR with event “Periodic Location” as defined in clause 4.1a.5.1 [TS 23.273], the UE shall perform the RSTD measurement in each reporting period and activate the location report at the time when the periodic timer expires.

Note: No per-positioning frequency layer requirement is applied in scenarios when multiple positioning frequency layers are configured.

If during the measurement period of one or more positioning frequency layers, the MG pattern is reconfigured, the measurement period can be longer. When PRS-RSRP is configured for DL-TDOA, RSTD and RSRP are performed over the same measurement period.

The measurement requirements in this clause apply, provided no PRS symbols are dropped during the measurement period $T_{RSTD,Total}$ within measurement gaps due to collisions with other signals; otherwise, the measurement period can be longer.

If CSSF changes during the measurement period, the measurement period could be longer.

The measurement requirements do not apply for a PRS resource, if the PRS resource is across two sampling duration of N within duration $L_{available_PRS,i}$.

The measurement requirements do not apply for a PRS resource, if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N .

The requirements in clause 9.9.2 do not apply if the PRS configuration given by higher layer parameters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-DL-TDOA-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

If handover occurs while RSTD measurements are being performed, then the UE shall continue and complete the on-going RSTD measurements. The RSTD measurement period can be longer. The UE shall meet the RSTD measurement accuracy requirements in clause 10.1.23.

9.9.2.6 Void

9.9.2.7 Measurements Period Requirements without Measurement Gaps

When physical layer receives last of *NR-DL-TDOA-ProvideAssistanceData* message and *NR-DL-TDOA-RequestLocationInformation* message from LMF via LPP [34], the UE shall be able to measure multiple (up to the UE capability specified in Clause 9.9.2.3) DL RSTD measurements, defined in TS 38.215 [4], during the measurement period $T_{RSTD,Total}$ defined as:

$T_{RSTD,Total} = \sum_{i=1}^L T_{RSTD_wo_gap,i} + (L - 1) * \max(T_{effect,i})$, if any of the positioning frequency layers are in Case 1, or

$T_{RSTD,Total} = \max(T_{RSTD_wo_gap,i} + T_{uncertainty,i})$, if all the positioning frequency layers are in Case 2,

Where,

i is the index of positioning frequency layer, and

L is total number of positioning frequency layers, and

$T_{\text{effect},i}$ is the periodicity of the PRS RSTD measurement in positioning frequency layer i , and

$T_{\text{uncertainty},i}$ is the time from the start of the first PPW occasion for positioning frequency layer i to the start of measurement period $T_{\text{RSTD},\text{Total}}$.

A positioning frequency layer is in Case 1 if UE reports *ppw-durationOfPRS-Processing1-r17* for the band containing the positioning frequency layer, and a positioning frequency layer is in Case 2 if UE reports *ppw-durationOfPRS-Processing2-r17* for the band containing the positioning frequency layer.

$T_{\text{RSTD_wo_gap},i}$ is the measurement period for PRS RSTD measurement in positioning frequency layer i as specified below.

$$T_{\text{RSTD_wo_gap},i} = \left(k_{\text{multiTEG},i} * N_{\text{RxBeam},i} * \left\lceil \frac{N_{\text{PRS},i}^{\text{slot}}}{N'} \right\rceil \left\lceil \frac{L_{\text{available_PRS},i}}{N} \right\rceil * N_{\text{sample}} - 1 \right) * T_{\text{effect},i} + T_{\text{last},i},$$

where:

$N_{\text{RxBeam},i}$ is the UE Rx beam sweeping factor. In FR1, $N_{\text{RxBeam},i} = 1$; and in FR2, $N_{\text{RxBeam},i}$ is equal to the value reported by the UE in *supportedLowerRxBeamSweepingFactor-FR2* if the UE supports the capability for the band containing positioning frequency layer i , and the LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-DL-TDOA-RequestLocationInformation*. $N_{\text{RxBeam},i}$ is equal to 8, otherwise.

$k_{\text{multiTEG},i}$ is the scaling factor for measurement of same PRS resource with multiple Rx TEGs.

$k_{\text{multiTEG},i} = 1$ if UE is not supported *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* or not requested by LMF to measure a PRS resource with multiple Rx TEGs via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34] in *NR-DL-TDOA-RequestLocationInformation*;

otherwise,

$k_{\text{multiTEG},i} = N_{\text{TEG},i}$, if the UE is not capable of receiving same DL PRS resource simultaneously from multiple Rx TEGs, and

$k_{\text{multiTEG},i} = \left\lceil \frac{N_{\text{TEG},i}}{k_{\text{TEG},\text{simul},i}} \right\rceil$ if the UE is capable of receiving the same DL PRS resource simultaneously from multiple Rx TEGs.

where

$N_{\text{TEG},i}$ is the number of Rx TEGs with which UE is requested to measure a PRS resource indicated via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* [34] in *NR-DL-TDOA-RequestLocationInformation*, and in case 'n0' is indicated, $N_{\text{TEG},i}$ is the maximum number of Rx TEGs with which UE can support to measure the same PRS resource as reported in *NR-UE-TEG-Capability*, and

$k_{\text{TEG},\text{simul},i}$ is the number of Rx TEGs UE can measure simultaneously which is reported via *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul*.

$N_{\text{PRS},i}^{\text{slot}}$ is the maximum number of DL PRS resources in positioning frequency layer i configured in a slot.

$L_{\text{available_PRS},i}$ is the time duration of available PRS in the positioning frequency layer i to be measured during $T_{\text{available_PRS},i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{\text{available_PRS},i}$,

only the PRS resources unmuted and fully or partially overlapped with PPW are considered, if positioning frequency layer i is in Case 1, or

only the PRS resources unmuted and fully or partially overlapped with the first (PPWL-T2) ms of PPW are considered, if positioning frequency layer i is in Case 2, where PPWL is the PPW length and T2 corresponds to *ppw-durationOfPRS-ProcessingSymbolsT2*.

N_{sample} is the number of PRS RSTD measurement samples, where

- $N_{sample} = 1$ if the UE supports *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and meets the following conditions:
 - PRS bandwidth is within the active BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
- $N_{sample} = 2$ if the UE supports *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and does not meet the following conditions:
 - PRS bandwidth is within the active BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
- $N_{sample} = 4$ otherwise.

$T_{last,i}$ is the measurement duration for the last PRS RSTD sample in positioning frequency layer i , including the sampling time and processing time.

If positioning frequency layer i is in Case 1 and all of the PRS resources to be measured are available in the same PPW occasion during $T_{available}$, then $T_{last,i} = T_i + PPWL$, else

if positioning frequency layer i is in Case 2 and all of the PRS resources to be measured are available in the same PPW occasion during $T_{available}$, then $T_{last,i} = PPWL$;

otherwise, $T_{last,i} = T_i + T_{available_PRS,i}$.

$T_{effect,i}$ is the periodicity of the PRS RSTD measurement in positioning frequency layer i defined as:

$$T_{effect,i} = \left\lceil \frac{T_i}{T_{available_PRS,i}} \right\rceil * T_{available_PRS,i}$$

Where,

T_i corresponds to *ppw-durationOfPRS-ProcessingSymbolsT* in TS 37.355 [34] if positioning frequency layer i is in Case 1, or corresponds to the sum of *ppw-durationOfPRS-ProcessingSymbolsT2* and *ppw-durationOfPRS-ProcessingSymbolsN2* in TS 37.355 [34] if positioning frequency layer i is in Case 2,

$T_{available_PRS,i} = LCM(T_{PRS,i}, PPWRP_i)$, the least common multiple between $T_{PRS,i}$ and $PPWRP_i$.

$PPWRP_i$ is the repetition periodicity of the PRS processing window applicable for measurements in the positioning frequency layer i .

$T_{PRS,i}$ is the periodicity of DL PRS resource with muting on positioning frequency layer i .

If more than one PRS periodicities are configured in positioning frequency layer i , the least common multiple of PRS periodicities $T_{per}^{PRS \text{ with muting}}$ among all DL PRS resource sets in the positioning frequency layer is used to derive $T_{PRS,i}$, where,

$T_{per}^{PRS \text{ with muting}} = N_{muting} * T_{per}^{PRS}$, is the PRS periodicity with muting per PRS resource,

T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*,

N_{muting} is the scaling factor considering PRS resource muting. $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$.

Note: For the purpose of calculating $T_{PRS,i}$, only the PRS resources that meet the conditions for PRS measurement outside measurement gaps as defined in clause 9.9.1.2 are considered.

N is a duration of DL PRS symbols in ms corresponding to $ppw\text{-}durationOfPRS\text{-}ProcessingSymbolsN$ in TS 37.355 [34] if positioning frequency layer i is in Case 1, or corresponding to $ppw\text{-}durationOfPRS\text{-}ProcessingSymbolsN2$ in TS 37.355 [34] if positioning frequency layer i is in Case 2.

N' is UE capability for number of DL PRS resources that it can process in a slot as indicated by $ppw\text{-}maxNumOfDL\text{-}PRS\text{-}ResProcessedPerSlot$ specified in TS 37.355 [34].

The time $T_{RSTD_wo_gap,i}$ starts from the first instance of the activated PPW for measurement of positioning frequency layer i aligned with a DL PRS resource(s) in the assistance data after both the *NR-DL-TDOA-RequestLocationInformation* message and *NR-DL-TDOA-RequestLocationInformation* message are delivered from LMF to the physical layer of UE via LPP [34].

If during the measurement period of one or more positioning frequency layers, the PPW is re-configured or reactivated, the measurement period can be longer. When PRS-RSRP is configured for DL-TDOA, RSTD and RSRP are performed over the same measurement period.

The measurement requirements in this clause apply, provided no PRS symbols are dropped during the measurement period $T_{RSTD_wo_gap,i}$ within PPW due to collisions with other signals; otherwise, the measurement period can be longer.

The measurement requirements do not apply for a PRS resource, if the PRS resource is across two sampling duration of N within duration $L_{available_PRS,i}$.

The measurement requirements do not apply for a PRS resource, if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N .

The requirements in clause 9.9.2 do not apply if the PRS configuration given by higher layer parameters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-DL-TDOA-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

If handover occurs while RSTD measurements are being performed, then the UE shall continue and complete the ongoing RSTD measurements. The RSTD measurement period can be longer. The UE shall meet the RSTD measurement accuracy requirements in clause 10.1.23.

If any positioning frequency layer is in Case 2, the requirements in this clause apply provided that the PPWL corresponding to the positioning frequency layer is larger than (T_2+X) ms.

The requirements in this clause apply provided that a single positioning frequency layer is configured for measurement in each PPW.

9.9.2.8 Void

9.9.2.9 Measurements Period Requirements with both MG and PPW

If the UE is configured with both MG applicable to positioning measurement and PPW, the UE shall measure positioning frequency layer i within

- MG, if PRS resources on positioning frequency layer i are overlapped with MG, or
- PPW, if PRS resources on positioning frequency layer i are overlapped with PPW.

The measurement period $T_{RSTD,Total}$ is defined as:

$$T_{RSTD,Total} = T_{RSTD,Total,MG} + T_{RSTD,Total,PPW} + T_{guard},$$

Where

- $T_{RSTD,Total,MG}$ is defined in clause 9.9.2.5 and includes all positioning frequency layers to be measured within MG,

- $T_{\text{RSTD,Total,PPW}}$ is defined in clause 9.9.2.7 and includes all positioning frequency layers to be measured within PPW,
- T_{guard} is the maximum T_{effect} defined in clauses 9.9.2.5 and 9.9.2.7 among all PFLs.

The requirements apply provided the following conditions are satisfied:

- MGs and PPWs do not overlap in time;
- Each PFL in the assistance data can be measured completely (all PRS resources) either within MG or within activated PPW.

9.9.3 PRS-RSRP measurements

9.9.3.1 Introduction

The requirements in clause 9.9.3.5 shall apply provided the UE has received a message from LMF via LPP [34] requesting the UE to measure and report PRS-RSRP measurements defined in TS 38.215 [4].

9.9.3.2 Requirements applicability

The requirements in clause 9.9.3 apply for periodic and triggered PRS-RSRP measurements, provided:

- PRS-RSRP related side conditions given in clause 10.1.24 are met for a corresponding Band.

9.9.3.3 Measurement Capability

UE PRS-RSRP measurement capability is as indicated by the UE in *NR-DL-AoD-ProvideCapabilities* according to TS 37.355 [34].

9.9.3.4 Measurement Reporting Requirements

This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times T_{\text{TI}_{\text{DCCH}}}$ where $T_{\text{TI}_{\text{DCCH}}}$ is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

The reported PRS-RSRP measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in clauses 10.1.24.3.

The PRS-RSRP measurement accuracy for all measured PRS resources shall be fulfilled according to the accuracy requirements specified in the clauses 10.1.24.

9.9.3.5 Measurement Period Requirements

When the physical layer receives *NR-DL-AoD-ProvideAssistanceData* message and *NR-DL-AoD-RequestLocationInformation* message from LMF via LPP [34], the UE shall be able to measure multiple (up to the UE capability specified in Clause 9.9.3.3) PRS-RSRP measurements, defined in TS 38.215 [4], from configured PRS resources for configured TRPs on configured positioning frequency layers, within $T_{\text{PRS-RSRP,total}}$ ms.

$$T_{\text{PRS-RSRP, total}} = \sum_{i=1}^L T_{\text{PRS-RSRP,i}} + (L - 1) * \max(T_{\text{effect,i}})$$

where

i is the index of positioning frequency layer,

L is total number of positioning frequency layers,

$T_{\text{effect},i}$ is the periodicity of the PRS-RSRP measurement in positioning frequency layer i .

$$T_{\text{PRS-RSRP},i} = \left(\text{CSSF}_i * \text{ceil}(K_{p,\text{PRS},i}) * N_{\text{RxBeam},i} * \left\lceil \frac{N_{\text{PRS},i}^{\text{slot}}}{N'} \right\rceil \left\lceil \frac{L_{\text{available_PRS},i}}{N} \right\rceil * N_{\text{sample}} - 1 \right) * T_{\text{effect},i} + T_{\text{last}}$$

where

CSSF_i is the carrier specific scaling factor for PRS-RSRP measurements specified in clause 9.1.5.2,

$K_{p,\text{PRS},i}$ is a scaling factor for a positioning frequency layer to be measured within the associated measurement gap pattern, which is defined as $K_{p,\text{PRS},i} = N_{\text{total}} / N_{\text{available}}$ for UE configured with concurrent measurement gap, and $K_{p,\text{PRS},i} = 1$ for UE not configured with concurrent measurement gap.

For a window W of duration $\max(T_{\text{PRS},i}, \text{MGRP_max})$, where MGRP max is the maximum MGRP across all configured per-UE MG and per-FR MG within the same FR as the positioning frequency layer, and starting at the beginning of any associated gap occasions covering the PRS occasion:

N_{total} is the total number of associated gap occasions covering PRS occasions within the window, including both dropped and non-dropped instances of the associated measurement gap within the window, and

$N_{\text{available}}$ is the number of non-dropped associated gap occasions covering PRS occasions within the window W, after further accounting for MG collisions by applying the selected gap collision rule

Requirements do not apply if $N_{\text{available}} = 0$.

$N_{\text{RxBeam},i}$ is the scaling factor for Rx beam sweeping, and $N_{\text{RxBeam},i} = 1$ if positioning frequency layer i is in FR1 and if positioning frequency layer i is in FR2, $N_{\text{RxBeam},i}$ is equal to the value reported by the UE in *supportedLowerRxBeamSweepingFactor-FR2* if the UE supports the capability for the band containing positioning frequency layer i , and the LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-DL-TDOA-RequestLocationInformation*. $N_{\text{RxBeam},i}$ is equal to 8, otherwise.

$L_{\text{available_PRS},i}$ is the time duration of available PRS to be measured in the positioning frequency layer i to be measured during $T_{\text{available_PRS},i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{\text{available_PRS},i}$, only the PRS resources unmuted and fully or partially overlapped with MG are considered.

$N_{\text{PRS},i}^{\text{slot}}$ is the maximum number of DL PRS resources of positioning frequency layer i configured in a slot,

$\{N, T\}$ is UE capability combination per band where N is a duration of DL PRS symbols in ms corresponding to *durationOfPRS-ProcessingSysmbols* in TS 37.355 [34] processed every T ms corresponding to *durationOfPRS-ProcessingSymbolsInEveryTms* in TS 37.355 [34] for a given maximum bandwidth supported by UE corresponding to *supportedBandwidthPRS* in TS 37.355 [34],

N' is UE capability for number of DL PRS resources that it can process in a slot as indicated by *maxNumOfDL-PRS-ResProcessedPerSlot* in clause 6.4.3 of TS 37.355 [34],

N_{sample} is the number of PRS RSRP measurement samples, where

- $N_{\text{sample}} = 1$ if the UE supports *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and meets the following conditions:
 - PRS bandwidth is within the active BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.

- $N_{sample} = 2$ if the UE supports *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and does not meet the following conditions:
 - PRS bandwidth is within the active BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
- $N_{sample} = 4$ otherwise.

$T_{last,i} = T_i + T_{available_PRS,i}$ is the measurement duration for the last PRS-RSRP sample, including the sampling time and processing time, if not all PRS resources to be measured are available in the same measurement gap occasion during $T_{available_PRS,i}$, otherwise $T_{last,i} = T_i + MGL$,

$T_{effct,i} = \left\lceil \frac{T_i}{T_{available_PRS,i}} \right\rceil * T_{available_PRS,i}$ is the periodicity of PRS-RSRP measurement in positioning frequency layer i ,

T_i corresponds to durationOfPRS-ProcessingSymbolsInEveryTms in TS 37.355 [34],

$T_{available_PRS,i} = LCM(T_{PRS,i}, MGRP_i)$ is the least common multiple between $T_{PRS,i}$ and $MGRP_i$,

$T_{PRS,i}$ is the maximum PRS resource periodicity among all PRS resources in positioning frequency layer i ,

$MGRP_i$ is the measurement gap repetition period in positioning frequency layer i .

If positioning frequency layer i has more than one DL PRS resource set with different PRS periodicities with muting, $T_{per}^{PRS \text{ with muting}} = N_{muting} * T_{per}^{PRS}$, the least common multiple of $T_{per}^{PRS \text{ with muting}}$ among the DL PRS resource sets is used to derive $T_{PRS,i}$, where:

T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*.

N_{muting} is the scaling factor considering PRS resource muting. $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$ which is given by the higher-layer parameter *NR-MutingPattern-r16* included in *DL-PRS-MutingOption1-r16*.

Note: For the purpose of calculating $T_{PRS,i}$, only the PRS resources fully or partially covered by the MG are considered.

When PRS-RSRP measurements are configured for DL-AoD, except for deferred MT-LR as defined in clause 4.1a.5 [TS 23.273], the time $T_{PRS-RSRP,total}$ starts from the first MG instance aligned with DL PRS resources in the assistance data after both the *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message from LMF via LPP [34] are delivered to the physical layer of UE.

For deferred MT-LR with other event than “Periodic Location” as defined in clause 4.1a.5.1 [TS 23.273], the time $T_{PRS-RSRP,total}$ starts from the first MG instance aligned with a DL PRS resource(s) in the assistance data after the associated event(s) occurs.

For deferred MT-LR with event “Periodic Location” as defined in clause 4.1a.5.1 [TS 23.273], the UE shall perform the PRS-RSRP measurement in each reporting period and activate the location report at the time when the periodic timer expires.

Note: No per-positioning frequency layer requirement is applied in scenarios when multiple positioning frequency layers are configured.

When the PRS-RSRP measurement is configured together with RSTD measurement then the PRS-RSRP measurement shall meet the RSTD measurement requirements defined in clause 9.9.2.

When the PRS-RSRP measurement is configured together with UE Rx-Tx time difference measurement then the PRS-RSRP measurement shall meet the UE Rx-Tx time difference measurement requirements defined in clause 9.9.4.

If CSSF changes during the measurement period, the measurement period could be longer.

The measurement requirements do not apply for a PRS resource:

- if the PRS resource is across two sampling duration of N within duration $L_{available_PRS,i}$ or
- if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N .

If during the measurement period of one or more positioning frequency layers, the MG pattern is reconfigured either per UE request or not per UE request, the measurement period can be longer.

The requirements in this section apply, provided no PRS symbols are dropped during the measurement period $T_{PRS-RSRP,total}$ within measurement gaps due to collisions with other signals; otherwise, a longer measurement period may be used.

The requirements in clause 9.9.3 do not apply if the PRS configuration given by higher layer parameters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-DL-AoD-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

If handover occurs while PRS-RSRP measurements are being performed then the UE shall complete the ongoing PRS-RSRP measurements session. The PRS-RSRP measurement period can be longer. The UE shall meet the PRS-RSRP measurement accuracy requirements in clause 10.1.24.

9.9.3.6 Measurement Period Requirements without Measurement Gaps

When the physical layer receives *NR-DL-AoD-ProvideAssistanceData* message and *NR-DL-AoD-RequestLocationInformation* message from LMF via LPP [34], the UE shall be able to measure multiple (up to the UE capability specified in Clause 9.9.3.3) PRS-RSRP measurements as defined in TS 38.215 [4] without measurement gap, on configured positioning frequency layer i , within $T_{PRS-RSRP,total}$ ms.

$T_{PRS-RSRP,total} = \sum_{i=1}^L T_{PRS-RSRP,i} + (L - 1) * \max(T_{effect,i})$ if any of the positioning frequency layers are in Case 1, or

$T_{PRS-RSRP,total} = \max(T_{PRS-RSRP,i} + T_{uncertainty,i})$, if all the positioning frequency layers are in Case 2,

Where,

i is the index of positioning frequency layer, and

L is total number of positioning frequency layers, and

$T_{effect,i}$ is the periodicity of the PRS RSTD measurement in positioning frequency layer i , and

$T_{uncertainty,i}$ is the time from the start of the first PPW occasion for positioning frequency layer i to the start of measurement period $T_{PRS-RSRP,total}$.

A positioning frequency layer is in Case 1 if UE reports *ppw-durationOfPRS-Processing1-r17* for the band containing the positioning frequency layer, and a positioning frequency layer is in Case 2 if UE reports *ppw-durationOfPRS-Processing2-r17* for the band containing the positioning frequency layer.

$T_{PRS-RSRP,i}$ is the measurement period for PRS-RSRP measurement in positioning frequency layer i as specified below.

$$T_{PRS-RSRP,i} = \left(N_{RxBeam,i} * \left\lceil \frac{N_{PRS,i}^{slot}}{N'} \right\rceil \left\lceil \frac{L_{available_PRS,i}}{N} \right\rceil * N_{sample} - 1 \right) * T_{effect,i} + T_{last}$$

where

$T_{effect,i}$ is the periodicity of the PRS-RSRP measurement in positioning frequency layer i .

$N_{RxBeam,i}$ is the scaling factor for Rx beam sweeping, and $N_{RxBeam,i}=1$ if positioning frequency layer i is in FR1. If positioning frequency layer i is in FR2, $N_{RxBeam,i}$ is equal to the value reported by the UE in *supportedLowerRxBeamSweepingFactor-FR2* if the UE supports the capability for the band containing positioning frequency layer i , and the LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-DL-TDOA-RequestLocationInformation*. $N_{RxBeam,i}$ is equal to 8, otherwise.

$L_{available_PRS,i}$ is the time duration of available PRS to be measured in the positioning frequency layer i to be measured during $T_{available_PRS,i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{available_PRS,i}$,

only unmuted PRS resource instances that meet the applicability conditions and fully or partially overlapped with PRS processing window are considered, if positioning frequency layer i is in Case 1, or

only the PRS resources unmuted and fully or partially overlapped with the first (PPWL-T2) ms of PPW are considered, if positioning frequency layer i is in Case 2, where PPWL is the PPW length and T2 corresponds to $ppw-durationOfPRS-ProcessingSymbolsT2$.

$N_{PRS,i}^{slot}$ is the maximum number of DL PRS resources of positioning frequency layer i configured in a slot,

$\{N, T\}$ is UE capability combination per band where N is a duration of DL PRS symbols in ms corresponding to $ppw-durationOfPRS-ProcessingSymbolsN$ in TS 37.355 [34] if positioning frequency layer i is in Case 1, or corresponding to $ppw-durationOfPRS-ProcessingSymbolsN2$ in TS 37.355 [34] if positioning frequency layer i is in Case 2,

N' is UE capability for number of DL PRS resources that it can process in a slot as indicated by $ppw-maxNumOfDL-PRS-ResProcessedPerSlot$ in clause 6.4.3 of TS 37.355 [34],

N_{sample} is the number of PRS RSRP measurement samples, where

- $N_{sample} = 1$ if the UE supports *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and meets the following conditions:
 - PRS bandwidth is within the active BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
- $N_{sample} = 2$ if the UE supports *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED* [34], and the LMF requests the UE to perform positioning measurements with reduced number of samples, and does not meet the following conditions:
 - PRS bandwidth is within the active BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
- $N_{sample} = 4$ otherwise.

T_{last} is the measurement duration for the last PRS-RSRP sample, including the sampling time and processing time.

If positioning frequency layer i is in Case 1 and all of the PRS resources to be measured are available in the same PPW occasion during $T_{available}$, then $T_{last,i} = T_i + PPWL$, else

if positioning frequency layer i is in Case 2 and all of the PRS resources to be measured are available in the same PPW occasion during $T_{available}$, then $T_{last,i} = PPWL$;

otherwise, $T_{last,i} = T_i + T_{available_PRS,i}$.

$T_{effect,i} = \left\lceil \frac{T_i}{T_{available_PRS,i}} \right\rceil * T_{available_PRS,i}$ is the periodicity of PRS-RSRP measurement in positioning frequency layer i ,

T_i corresponds to $ppw-durationOfPRS-ProcessingSymbolsT$ in TS 37.355 [34] if positioning frequency layer i is in Case 1, or corresponds to the sum of $ppw-durationOfPRS-ProcessingSymbolsT2$ and $ppw-durationOfPRS-ProcessingSymbolsN2$ in TS 37.355 [34] if positioning frequency layer i is in Case 2

$T_{available_PRS,i} = LCM(T_{PRS,i}, PPWRP_i)$ is the least common multiple between $T_{PRS,i}$ and $PPWRP_i$,

$T_{PRS,i}$ is the maximum PRS resource periodicity among all PRS resources in positioning frequency layer i ,

$PPWRP_i$ is the PRS processing window repetition period in positioning frequency layer i .

If positioning frequency layer i has more than one DL PRS resource set with different PRS periodicities with muting, $T_{per}^{PRS \text{ with muting}} = N_{muting} * T_{per}^{PRS}$, the least common multiple of $T_{per}^{PRS \text{ with muting}}$ among the DL PRS resource sets is used to derive $T_{PRS,i}$, where:

T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*.

N_{muting} is the scaling factor considering PRS resource muting. If bitmap $\{b^1\}$ for higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$.

Note: For the purpose of calculating $T_{PRS,i}$, only the PRS resources that meet the applicability conditions and fully or partially covered by the PRS processing window are considered.

When PRS-RSRP measurements are configured for DL-AoD, the time $T_{PRS-RSRP,i}$ starts from the first PRS processing window instance aligned with DL PRS resources in the assistance data after both the *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message from LMF via LPP [34] are delivered to the physical layer of UE.

Note: No per-positioning frequency layer requirement is applied in scenarios when multiple positioning frequency layers are configured.

When the PRS-RSRP measurement is configured together with RSTD measurement then the PRS-RSRP measurement shall meet the RSTD measurement requirements defined in clause 9.9.2.

When the PRS-RSRP measurement is configured together with UE Rx-Tx time difference measurement then the PRS-RSRP measurement shall meet the UE Rx-Tx time difference measurement requirements defined in clause 9.9.4.

If CSSF changes during the measurement period, the measurement period could be longer.

The measurement requirements do not apply for a PRS resource:

if the PRS resource is across two sampling duration of N within duration $L_{available_PRS,i}$ or

if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N .

The requirements in clause 9.9.3 do not apply if the PRS configuration given by higher layer parameters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-DL-AoD-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

If during the measurement period of one or more positioning frequency layers, the PPW is reconfigured or reactivated, the PRS-RSRP measurement period can be longer.

If any positioning frequency layer is in Case 2, the requirements in this clause apply provided that the PPWL corresponding to the positioning frequency layer is larger than (T_2+X) ms.

The requirements in this clause apply provided that a single positioning frequency layer is configured for measurement in each PPW.

9.9.3.7 Void

9.9.3.8 Measurements Period Requirements with both MG and PPW

If the UE is configured with both MG applicable to positioning measurement and PPW, the UE shall measure positioning frequency layer i within

- MG, if PRS resources on positioning frequency layer i are overlapped with MG, or

- PPW, if PRS resources on positioning frequency layer i are overlapped with PPW.

The measurement period $T_{\text{PRS-RSRP, total}}$ is defined as:

$$T_{\text{PRS-RSRP, total}} = T_{\text{PRS-RSRP, Total, MG}} + T_{\text{PRS-RSRP, Total, PPW}} + T_{\text{guard}},$$

Where

- $T_{\text{PRS-RSRP, Total, MG}}$ is defined in clause 9.9.3.5 and includes all positioning frequency layers to be measured within MG,
- $T_{\text{PRS-RSRP, Total, PPW}}$ is defined in clause 9.9.3.6 and includes all positioning frequency layers to be measured within PPW,
- T_{guard} is the maximum T_{effect} defined in clauses 9.9.3.5 and 9.9.3.6 among all PFLs.

The requirements apply provided the following conditions are satisfied:

- MGs and PPWs do not overlap in time;
- Each PFL in the assistance data can be measured completely (all PRS resources) either within MG or within activated PPW.

9.9.4 UE Rx-Tx time difference measurements

9.9.4.1 Introduction

The requirements in this clause shall apply, provided the UE has received *nr-Multi-RTT-RequestLocationInformation* message from LMF via LPP [34] requesting the UE to measure and report one or more UE Rx-Tx time difference measurements defined in TS 38.215 [4].

9.9.4.2 Requirements Applicability

The requirements in clause 9.9.4 apply for periodic and triggered UE Rx-Tx time difference measurements, provided:

- UE Rx-Tx time difference measurement related side conditions given in clause 10.1.25 are met for a corresponding band.
- SRS is configured on at least one of the PCell, PSCell and SCell.
- The UE transmits SRS within [-160, 160] msec of at least one DL PRS resource of each of the TRPs in the assistance data.

9.9.4.3 Measurement Capability

UE Rx-Tx time difference measurement capability is as indicated by the UE in *NR-Multi-RTT-ProvideCapabilities*, according to TS 37.355 [34].

9.9.4.4 Measurement Reporting Requirements

This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{\text{DCCH}}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

The UE Rx-Tx time difference measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in clause 10.1.25.

The UE Rx-Tx time difference measurement accuracy for all measured DL PRS resources shall be fulfilled according to the accuracy requirements specified in clause 10.1.25.

9.9.4.5 Measurement Period Requirements

When physical layer receives last of *NR-Multi-RTT-ProvideAssistanceData* message and *NR-Multi-RTT-RequestLocationInformation* message from LMF via LPP [34], UE shall be able to measure multiple (up to the UE capability specified in clause 9.9.4.3) UE Rx-Tx time difference measurements as defined in TS 38.215 [4] in configured positioning frequency layers within the measurement period $T_{\text{UERxTx,Total}}$ ms.

$$T_{\text{UERxTx, Total}} = \sum_{i=1}^L T_{\text{UERxTx},i} + (L - 1) * \max(T_{\text{effect},i}).$$

where i is the index of positioning frequency layer,

$T_{\text{UERxTx},i}$ is the measurement period for UE Rx-Tx time difference measurements in positioning frequency layer i as further defined in this clause,

L is total number of positioning frequency layers, and

$T_{\text{effect},i}$ is the periodicity of the UE Rx-Tx time difference measurement in positioning frequency layer i as defined further in this clause.

$$T_{\text{UERxTx},i} = \left(k_{\text{multiTEG},i} * \text{CSSF}_i * \text{ceil}(K_{\text{p,PRS},i}) * N_{\text{RxBeam},i} * \left\lceil \frac{N_{\text{PRS},i}^{\text{slot}}}{N'} \right\rceil \left\lfloor \frac{L_{\text{available_PRS},i}}{N} \right\rfloor * N_{\text{sample}} - 1 \right) * T_{\text{effect},i} + T_{\text{last},i}$$

Where

CSSF_i is the carrier-specific scaling factor for NR PRS-based measurement in the positioning frequency layer i as defined in clause 9.1.5.2,

$k_{\text{multiTEG},i}$ is the scaling factor for measurement of same PRS resource with multiple Rx TEGs.

$k_{\text{multiTEG},i}=1$ if UE is not requested by LMF to measure a PRS resource with multiple Rx TEGs via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* or *measureSameDL-PRS-ResourceWithDifferentRxTxTEGs-r17* [34] in *NR-Multi-RTT-RequestLocationInformation*;

otherwise,

$k_{\text{multiTEG},i}=N_{\text{TEG},i}$, if UE is not capable of receiving same DL PRS resource simultaneously from multiple Rx TEGs, and

$k_{\text{multiTEG},i} = \left\lceil \frac{N_{\text{TEG},i}}{k_{\text{TEG,simul},i}} \right\rceil$ if UE is capable of receiving the same DL PRS resource simultaneously from multiple Rx TEGs.

where

$N_{\text{TEG},i}$ is the number of Rx TEGs or RxTx TEGs with which UE is requested to measure a PRS resource indicated via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* or *measureSameDL-PRS-ResourceWithDifferentRxTxTEGs-r17* [34] in *NR-Multi-RTT-RequestLocationInformation*, and in case ‘n0’ is indicated, $N_{\text{TEG},i}$ is the maximum number of Rx TEGs with which UE can support to measure the same PRS resource as reported in *NR-UE-TEG-Capability*, and

$k_{\text{TEG,simul},i}$ is the number of Rx TEGs UE can measure simultaneously which is reported via *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul*.

$K_{p,PRS,i}$ is a scaling factor for a positioning frequency layer to be measured within the associated measurement gap pattern, which is defined as $K_{p,PRS,i} = N_{total} / N_{available}$ for UE configured with concurrent measurement gap, and $K_{p,PRS,i} = 1$ for UE not configured with concurrent measurement gap.

For a window W of duration $\max(T_{PRS,i}, MGRP_max)$, where $MGRP_max$ is the maximum MGRP across all configured per-UE MG and per-FR MG within the same FR as the positioning frequency layer, and starting at the beginning of any associated gap occasions covering the PRS occasion:

N_{total} is the total number of associated gap occasions covering PRS occasions within the window, including both dropped and non-dropped instances of the associated measurement gap within the window, and

$N_{available}$ is the number of non-dropped associated gap occasions covering PRS occasions within the window W , after further accounting for MG collisions by applying the selected gap collision rule

Requirements do not apply if $N_{available} = 0$.

$N_{RxBeam,i}$ is the scaling factor for Rx beam sweeping, and $N_{RxBeam,i} = 1$ if positioning frequency layer i is in FR1 and if positioning frequency layer i is in FR2, $N_{RxBeam,i}$ is equal to the value reported by the UE in *supportedLowerRxBeamSweepingFactor-FR2* if the UE supports the capability for the band containing positioning frequency layer i , and the LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-Multi-RTT-RequestLocationInformation*. $N_{RxBeam,i}$ is equal to 8, otherwise.

$L_{available_PRS,i}$ is the time duration of available PRS resources in the positioning frequency layer i , to be measured during $T_{available_PRS,i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{available_PRS,i}$, only the PRS resources unmuted and fully or partially overlapped with MG are considered.

$N_{PRS,i}^{slot}$ is the maximum number of DL PRS resources of positioning frequency layer i configured in a slot,

$\{N, T\}$ is UE capability combination per band where N is a duration of DL PRS symbols in ms corresponding to *durationOfPRS-ProcessingSyms* in TS 37.355 [34] processed every T ms corresponding to *durationOfPRS-ProcessingSymsInEveryTms* in TS 37.355 [34] for a given maximum bandwidth supported by UE corresponding to *supportedBandwidthPRS* in clause 4.2.7.2 of TS 37.355 [34],

N' is UE capability for number of DL PRS resources that it can process in a slot corresponding to *maxNumOfDL-PRS-ResProcessedPerSlot* as specified in clause 6.4.3 of TS 37.355 [34],

N_{sample} is the number of UE Rx-Tx time difference measurement samples:

- $N_{sample} = 1$ if the UE is capable of *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED* defined in [34] and LMF requests the UE to perform positioning measurements with reduced number of samples by *reducedDL-PRS-ProcessingSamples* [34] and the following conditions are met:
 - PRS bandwidth is within the active BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
- $N_{sample} = 2$ if the UE is capable of *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED* defined in [34] and the LMF requests the UE to perform positioning measurements with reduced number of samples by *reducedDL-PRS-ProcessingSamples* [34] but the following conditions are not met:
 - PRS bandwidth is within the active BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
- $N_{sample} = 4$ otherwise.

$T_{last,i}$ is the measurement duration for the last UE Rx-Tx time difference measurement sample in the positioning layer i , including the sampling time and processing time, $T_{last,i} = T_i + T_{available_PRS,i}$,

$T_{effect,i}$ is periodicity of UE Rx-Tx time difference measurement in positioning frequency layer i :

$$T_{\text{effect},i} = \left\lceil \frac{T_i}{T_{\text{available_PRS},i}} \right\rceil * T_{\text{available_PRS},i}$$

where

T_i corresponds to *durationOfPRS-ProcessingSymbolsInEveryTms* in TS 37.355 [34],

$T_{\text{available_PRS},i} = \text{LCM}(T_{\text{PRS},i}, \text{MGRP}_i)$, the least common multiple between $T_{\text{PRS},i}$ and MGRP_i

MGRP_i is the measurement gap repetition periodicity in positioning frequency layer i .

$T_{\text{PRS},i}$ is the PRS resource periodicity in positioning frequency layer i . If the positioning frequency layer i has more than one DL PRS resource sets with different PRS periodicities with muting, $T_{\text{per}}^{\text{PRS with muting}} = N_{\text{muting}} * T_{\text{per}}^{\text{PRS}}$, the least common multiple of $T_{\text{per}}^{\text{PRS with muting}}$ among DL PRS resource sets is used to derive $T_{\text{PRS},i}$, where

$T_{\text{per}}^{\text{PRS}}$ is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*.

N_{muting} is the scaling factor considering PRS resource muting. $N_{\text{muting}} = T_{\text{muting}}^{\text{PRS}} * L_{\text{muting}}$, where $T_{\text{muting}}^{\text{PRS}}$ is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$ which is given by the higher-layer parameter *NR-MutingPattern-r16* included in *DL-PRS-MutingOption1-r16*

Note: For the purpose of calculating $T_{\text{PRS},i}$, only the PRS resources fully or partially covered by the MG are considered.

Except for deferred MT-LR as defined in clause 4.1a.5 [TS 23.273], the time $T_{\text{UE RxTx,Total}}$ starts from the first MG instance aligned with DL PRS resources in the assistance data after both the *NR-Multi-RTT-RequestLocationInformation* message and *NR-Multi-RTT-ProvideAssistanceData* message from LMF via LPP [34] are delivered to the physical layer of UE.

For deferred MT-LR with other event than “Periodic Location” as defined in clause 4.1a.5.1 [TS 23.273], the time $T_{\text{UE RxTx,Total}}$ starts from the first MG instance aligned with a DL PRS resource(s) in the assistance data after the associated event(s) occurs.

For deferred MT-LR with event “Periodic Location” as defined in clause 4.1a.5.1 [TS 23.273], the UE shall perform the PRS-RSRP measurement in each reporting period and activate the location report at the time when the periodic timer expires.

Note: No per-positioning frequency layer requirement is applied in scenarios when multiple positioning frequency layers are configured.

The UE Rx-Tx time difference measurement period is restarted if HO occurs during the measurement period and after SRS reconfiguration on the target cell is complete.

The measurement requirements do not apply for a PRS resource:

- if the PRS resource is across two sampling duration of N within duration $L_{\text{available_PRS},i}$ OR
- if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N .

If during the measurement period of one or more positioning frequency layers, the MG pattern is reconfigured either per UE request or not per UE request, the measurement period can be longer.

The requirements in this section apply, provided no PRS symbols are dropped during the measurement period $T_{\text{UE RxTx,Total}}$ within measurement gaps due to collisions with other signals; otherwise, a longer measurement period may be used.

When PRS-RSRP is configured for multi-RTT, the UE Rx-Tx time difference measurements and PRS-RSRP measurements are performed over the same measurement period.

The requirements in clause 9.9.4 do not apply if the PRS configuration given by higher layer parameters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-*

Multi-RTT-ProvideCapabilities, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

When PSCell or SCell addition or release does not cause SRS reconfiguration during the measurement period, UE continues the UE Rx-Tx time difference measurement, and the measurement period requirements apply.

When PSCell or SCell addition or release causes SRS reconfiguration during the measurement period, UE shall restart the UE Rx-Tx time difference measurement after the SRS reconfiguration on the target cell is complete.

When SRS is reconfigured without serving cell change during the measurement period, UE shall restart the UE Rx-Tx time difference measurement after the SRS reconfiguration is complete. If UE uplink transmission timing changes due to the network-configured Timing Advance command during the UE Rx-Tx measurement period, then the UE Rx-Tx time difference measurement period is restarted after uplink transmission timing changes, and the UE Rx-Tx time difference measurement period requirements in this clause shall not apply.

When a serving cell change occurs during the measurement period, the UE shall continue and complete the UE Rx-Tx time difference measurement provided that the serving cell change does not impact SRS configuration for the UE Rx-Tx time difference measurement.

If UE uplink transmission timing changes due to the change in the N_{TA_offset} defined in Table 7.1.2-2 during the UE Rx-Tx measurement period, then the UE Rx-Tx time difference measurement period is restarted after uplink transmission timing changes, and the UE Rx-Tx time difference measurement period requirements in this clause shall not apply.

If UE uplink transmission timing changes due to the UE autonomous timing adjustment defined in clause 7.1.2 during the UE Rx-Tx measurement period, then:

- UE Rx-Tx measurement period requirements in this clause shall apply for a cell, which is also the downlink reference cell (defined in section 7.1.1) for SRS transmission.
- UE Rx-Tx measurement period requirements in this clause shall not apply for a cell, which is not the downlink reference cell (defined in section 7.1.1) for SRS transmission. The UE Rx-Tx time difference measurement period may be restarted in such case.

9.9.4.6 Measurement Period Requirements without Measurement Gaps

When physical layer receives last of *NR-Multi-RTT-ProvideAssistanceData* message and *NR-Multi-RTT-RequestLocationInformation* message from LMF via LPP [34], UE shall be able to measure multiple (up to the UE capability specified in clause 9.9.4.3) UE Rx-Tx time difference measurements as defined in TS 38.215 [4] in configured positioning frequency layers within the measurement period $T_{UERxTx_wo_gap, Total}$ ms.

$T_{UERxTx_wo_gap, Total} = \sum_{i=1}^L T_{UERxTx_wo_gap, i} + (L - 1) * \max(T_{effect, i})$, if any of the positioning frequency layers are in Case 1, or

$T_{UERxTx_wo_gap, Total} = \max(T_{UERxTx_wo_gap, i} + T_{uncertainty, i})$, if all the positioning frequency layers are in Case 2.

Where,

i is the index of positioning frequency layer, and

L is total number of positioning frequency layers, and

$T_{effect, i}$ is the periodicity of the PRS RSTD measurement in positioning frequency layer i , and

$T_{uncertainty, i}$ is the time from the start of the first PPW occasion for positioning frequency layer i to the start of measurement period $T_{UERxTx_wo_gap, Total}$.

A positioning frequency layer is in Case 1 if UE reports *ppw-durationOfPRS-Processing1-r17* for the band containing the positioning frequency layer, and a positioning frequency layer is in Case 2 if UE reports *ppw-durationOfPRS-Processing2-r17* for the band containing the positioning frequency layer.

$T_{UERxTx_wo_gap, i}$ is the measurement period for UE Rx-Tx time difference measurement in positioning frequency layer i as specified below.

$$T_{\text{UE Rx-Tx_wo_gap},i} = \left(k_{\text{multiTEG},i} * N_{\text{RxBeam},i} * \left\lceil \frac{N_{\text{PRS},i}^{\text{slot}}}{N'} \right\rceil \left\lceil \frac{L_{\text{available_PRS},i}}{N} \right\rceil * N_{\text{sample}} - 1 \right) * T_{\text{effect},i} + T_{\text{last},i}$$

Where

$T_{\text{effect},i}$ is the periodicity of the UE Rx-Tx time difference measurement in positioning frequency layer i as defined further in this clause.

$k_{\text{multiTEG},i}$ is the scaling factor for measurement of same PRS resource with multiple Rx TEGs.

$k_{\text{multiTEG},i}=1$ if UE is not supported *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* or not requested by LMF to measure a PRS resource with multiple Rx TEGs via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* or *measureSameDL-PRS-ResourceWithDifferentRxTxTEGs-r17* [34] in *NR-Multi-RTT-RequestLocationInformation*;

otherwise,

$k_{\text{multiTEG},i}=N_{\text{TEG},i}$, if UE is not capable of receiving same DL PRS resource simultaneously from multiple Rx TEGs, and

$k_{\text{multiTEG},i}=\left\lceil \frac{N_{\text{TEG},i}}{k_{\text{TEG,simul},i}} \right\rceil$ if UE is capable of receiving the same DL PRS resource simultaneously from multiple Rx TEGs.

where

$N_{\text{TEG},i}$ is the number of Rx TEGs or RxTx TEGs with which UE is requested to measure a PRS resource indicated via *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* or *measureSameDL-PRS-ResourceWithDifferentRxTxTEGs-r17* [34] in *NR-Multi-RTT-RequestLocationInformation*, and in case ‘n0’ is indicated, $N_{\text{TEG},i}$ is the maximum number of Rx TEGs with which UE can support to measure the same PRS resource as reported in *NR-UE-TEG-Capability*, and

$k_{\text{TEG,simul},i}$ is the number of Rx TEGs UE can measure simultaneously which is reported via *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul*.

$N_{\text{RxBeam},i}$ is the scaling factor for Rx beam sweeping, and $N_{\text{RxBeam},i}=1$ if positioning frequency layer i is in FR1. If positioning frequency layer i is in FR2, $N_{\text{RxBeam},i}$ is equal to the value reported by the UE in *supportedLowerRxBeamSweepingFactor-FR2* if the UE supports the capability for the band containing positioning frequency layer i , and the LMF indicates *lowerRxBeamSweepingFactor-FR2* in *NR-Multi-RTT-RequestLocationInformation*. $N_{\text{RxBeam},i}$ is equal to 8, otherwise.

$L_{\text{available_PRS},i}$ is the time duration of available PRS resources in the positioning frequency layer i , to be measured during $T_{\text{available_PRS},i}$, and is calculated in the same way as PRS duration K defined in clause 5.1.6.5 of TS 38.214 [26]. For calculation of $L_{\text{available_PRS},i}$,

only the unmuted PRS resources that meet the applicability conditions and fully or partially overlapped with PRS processing window are considered, if positioning frequency layer i is in Case 1, or

only the PRS resources unmuted and fully or partially overlapped with the first (PPWL-T2) ms of PPW are considered, if positioning frequency layer i is in Case 2, where PPWL is the PPW length and T2 corresponds to *ppw-durationOfPRS-ProcessingSymbolsT2*.

$N_{\text{PRS},i}^{\text{slot}}$ is the maximum number of DL PRS resources of positioning frequency layer i configured in a slot,

{N, T} is UE capability combination per band where N is a duration of DL PRS symbols in ms corresponding to *ppw-durationOfPRS-ProcessingSymbolsN* in TS 37.355 [34] if positioning frequency layer i is in Case 1, or corresponding to *ppw-durationOfPRS-ProcessingSymbolsN2* in TS 37.355 [34] if positioning frequency layer i is in Case 2,

- N' is UE capability for number of DL PRS resources that it can process in a slot corresponding to *ppw-maxNumOfDL-PRS-ResProcessedPerSlot* as specified in clause 6.4.3 of TS 37.355 [34],
- N_{sample} is the number of UE Rx-Tx time difference measurement samples:

- $N_{sample} = 4$ if the UE is not capable of *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED* defined in [34].
- $N_{sample} = 1$ if the UE is capable of *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED* defined in [34] and LMF requests the UE to perform positioning measurements with reduced number of samples by *reducedDL-PRS-ProcessingSamples* [34] and the following conditions are met:
 - PRS bandwidth is within the active BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
- $N_{sample} = 2$ if the UE is capable of *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED* defined in [34] and the LMF requests the UE to perform positioning measurements with reduced number of samples by *reducedDL-PRS-ProcessingSamples* [34] but the following conditions are not met:
 - PRS bandwidth is within the active BWP and
 - Magnitude of difference between the serving cell's SS-RSRP and the neighbor cell's PRS-RSRP is within 6 dB.
- $N_{sample} = 4$ otherwise.
- $T_{last,i}$ is the measurement duration for the last UE Rx-Tx time difference measurement sample in the positioning layer i , including the sampling time and processing time.

If positioning frequency layer i is in Case 1 and all of the PRS resources to be measured are available in the same PPW occasion during $T_{available}$, then $T_{last,i} = T_i + PPWL$, else

if positioning frequency layer i is in Case 2 and all of the PRS resources to be measured are available in the same PPW occasion during $T_{available}$, then $T_{last,i} = PPWL$;

otherwise, $T_{last,i} = T_i + T_{available_PRS,i}$.

- $T_{effect,i}$ is periodicity of UE Rx-Tx time difference measurement in positioning frequency layer i :

$$T_{effect,i} = \left\lceil \frac{T_i}{T_{available_PRS,i}} \right\rceil * T_{available_PRS,i}$$

where

T_i corresponds to *ppw-durationOfPRS-ProcessingSymbolsT* in TS 37.355 [34] if positioning frequency layer i is in Case 1, or corresponds to the sum of *ppw-durationOfPRS-ProcessingSymbolsT2* and *ppw-durationOfPRS-ProcessingSymbolsN2* in TS 37.355 [34] if positioning frequency layer i is in Case 2,

$T_{available_PRS,i} = LCM(T_{PRS,i}, PPWRP_i)$, the least common multiple between $T_{PRS,i}$ and $PPWRP_i$

$PPWRP_i$ is the PRS processing window repetition periodicity in positioning frequency layer i .

$T_{PRS,i}$ is the PRS resource periodicity in positioning frequency layer i . If the positioning frequency layer i has more than one DL PRS resource sets with different PRS periodicities with muting, $T_{per}^{PRS \text{ with muting}} = N_{muting} * T_{per}^{PRS}$, the least common multiple of $T_{per}^{PRS \text{ with muting}}$ among DL PRS resource sets is used to derive $T_{PRS,i}$, where

T_{per}^{PRS} is the periodicity of PRS resource sets given by the higher-layer parameter *DL-PRS-Periodicity*.

N_{muting} is the scaling factor considering PRS resource muting. $N_{muting} = T_{muting}^{PRS} * L_{muting}$, where T_{muting}^{PRS} is the muting repetition factor given by the higher-layer parameter *DL-PRS-MutingBitRepetitionFactor*, and L_{muting} is the size of the bitmap $\{b^1\}$

Note: For the purpose of calculating $T_{PRS,i}$, only the PRS resources that meet the applicability conditions and fully or partially covered by the PRS processing window are considered.

The time $T_{\text{UERxTx_wo_gap},i}$ starts from the first PRS processing window instance aligned with DL PRS resources in the assistance data after both the *NR-Multi-RTT-RequestLocationInformation* message and *NR-Multi-RTT-ProvideAssistanceData* message from LMF via LPP [34] are delivered to the physical layer of UE.

The UE Rx-Tx time difference measurement period is restarted if HO occurs during the measurement period and after SRS reconfiguration on the target cell is complete.

The measurement requirements do not apply for a PRS resource:

- if the PRS resource is across two sampling duration of N within duration $L_{\text{available_PRS},i}$ OR
- if time span of the PRS resource instance (including at least the minimum number of repetitions specified in the accuracy requirements) is greater than UE reported capability N .

If during the measurement period of one or more positioning frequency layers, the PRS processing window is reconfigured or reactivated either per UE request or not per UE request, the measurement period can be longer.

The requirements in this section apply, provided no PRS symbols are dropped during the measurement period $T_{\text{UERxTx_wo_gap},i}$ within PRS processing window due to collisions with other signals; otherwise, a longer measurement period may be used.

When PRS-RSRP is configured for multi-RTT, the UE Rx-Tx time difference measurements and PRS-RSRP measurements are performed over the same measurement period.

The requirements in clause 9.9.4.6 do not apply if the PRS configuration given by higher layer parameters *NR-DL-PRS-AssistanceData* exceeds any of the UE measurement capabilities given by *NR-DL-PRS-ResourcesCapability* in *NR-Multi-RTT-ProvideCapabilities*, and it is up to UE implementation which PRS resources are measured, subject to UE measurement capabilities.

When PSCell or SCell addition or release does not cause SRS reconfiguration during the measurement period, UE continues the UE Rx-Tx time difference measurement, and the measurement period requirements apply.

When PSCell or SCell addition or release causes SRS reconfiguration during the measurement period, UE shall restart the UE Rx-Tx time difference measurement after the SRS reconfiguration on the target cell is complete.

When SRS is reconfigured without cell change during the measurement period, UE shall restart the UE Rx-Tx time difference measurement after the SRS reconfiguration on the target cell is complete.

If UE uplink transmission timing changes due to the network-configured Timing Advance command during the UE Rx-Tx measurement period, then the UE Rx-Tx time difference measurement period is restarted after uplink transmission timing changes, and the UE Rx-Tx time difference measurement period requirements in this clause shall not apply.

If UE uplink transmission timing changes due to the change in the $N_{\text{TA_offset}}$ defined in Table 7.1.2-2 during the UE Rx-Tx measurement period, then the UE Rx-Tx time difference measurement period is restarted after uplink transmission timing changes, and the UE Rx-Tx time difference measurement period requirements in this clause shall not apply.

If UE uplink transmission timing changes due to the UE autonomous timing adjustment defined in clause 7.1.2 during the UE Rx-Tx measurement period, then:

- UE Rx-Tx measurement period requirements in this clause shall apply for a cell, which is also the downlink reference cell (defined in section 7.1.1) for SRS transmission.
- UE Rx-Tx measurement period requirements in this clause shall not apply for a cell, which is not the downlink reference cell (defined in section 7.1.1) for SRS transmission. The UE Rx-Tx time difference measurement period may be restarted in such case.

If any positioning frequency layer is in Case 2, the requirements in this clause apply provided that the PPWL corresponding to the positioning frequency layer is larger than $(T_2 + X)$ ms.

The requirements in this clause apply provided that a single positioning frequency layer is configured for measurement in each PPW.

9.9.4.7 Void

9.9.4.8 Measurements Period Requirements with both MG and PPW

If the UE is configured with both MG applicable to positioning measurement and PPW, the UE shall measure positioning frequency layer i within

- MG, if PRS resources on positioning frequency layer i are overlapped with MG, or
- PPW, if PRS resources on positioning frequency layer i are overlapped with PPW.

The measurement period $T_{\text{UE} \times \text{Tx}, \text{Total}}$ is defined as:

$$T_{\text{UE} \times \text{Tx}, \text{Total}} = T_{\text{UE} \times \text{Tx}, \text{Total}, \text{MG}} + T_{\text{UE} \times \text{Tx}, \text{Total}, \text{PPW}} + T_{\text{guard}},$$

Where

- $T_{\text{UE} \times \text{Tx}, \text{Total}, \text{MG}}$ is defined in clause 9.9.4.5 and includes all positioning frequency layers to be measured within MG,
- $T_{\text{UE} \times \text{Tx}, \text{Total}, \text{PPW}}$ is defined in clause 9.9.4.6 and includes all positioning frequency layers to be measured within PPW,
- T_{guard} is the maximum T_{effect} defined in clauses 9.9.4.5 and 9.9.4.6 among all PFLs.

The requirements apply provided the following conditions are satisfied:

- MGs and PPWs do not overlap in time;
- Each PFL in the assistance data can be measured completely (all PRS resources) either within MG or within activated PPW.

9.9.5 E-CID measurements

9.9.5.1 Introduction

The requirements in clause 9.9.5 shall apply provided the UE has received *nr-ECID-RequestLocationInformation* message from LMF via LPP [34] requesting the UE to report one or more of the following measurements for NR E-CID positioning [22]: SS-RSRP, SS-RSRQ, CSI-RSRP, and CSI-RSRQ.

9.9.5.2 Measurement Requirements

9.9.5.2.1 Intra-frequency Measurement Requirements

The intra-frequency NR E-CID measurements shall meet the requirements in clause 9.2 and clause 9.10.2, except the measurement reporting requirements. The NR E-CID measurement reporting requirements are defined in clause 9.9.5.2.3.

The reported intra-frequency NR E-CID measurements shall also meet:

- for FR1 SS-RSRP, the accuracy requirements in clauses 10.1.2.1,
- for FR1 SS-RSRQ, the accuracy requirements in clauses 10.1.7.1,
- for FR1 CSI-RSRP, the accuracy requirements in clause 10.1.2.3,
- for FR1 CSI-RSRQ, the accuracy requirements in clause 10.1.7.2,
- for FR2 SS-RSRP, the accuracy requirements in clauses 10.1.3.1,
- for FR2 SS-RSRQ, the accuracy requirements in clauses 10.1.8.1,

- for FR2 CSI-RSRP, the accuracy requirements in clause 10.1.3.3,
- for FR2 CSI-RSRQ, the accuracy requirements in clause 10.1.8.2.

9.9.5.2.2 Inter-frequency Measurement Requirements

The inter-frequency NR E-CID measurements shall meet the requirements in clause 9.3 and 9.10.4, except the measurement reporting requirements. The NR E-CID measurement reporting requirements are defined in clause 9.9.5.2.3.

The reported inter-frequency NR E-CID measurements shall also meet:

- for FR1 SS-RSRP, the accuracy requirements in clauses 10.1.4.1,
- for FR1 SS-RSRQ, the accuracy requirements in clauses 10.1.9.1,
- for FR1 CSI-RSRP, the accuracy requirements 10.1.4.3,
- for FR1 CSI-RSRQ, the accuracy requirements 10.1.9.2,
- for FR2 SS-RSRP, the accuracy requirements in clauses 10.1.5.1,
- for FR2 SS-RSRQ, the accuracy requirements in clauses 10.1.10.1,
- for FR2 CSI-RSRP, the accuracy requirements 10.1.5.3,
- for FR2 CSI-RSRQ, the accuracy requirements 10.1.10.2.

9.9.5.2.3 Measurement Reporting Delay

The measurement reporting delay is defined as the time between the moment when the periodic measurement report is triggered and the moment when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

The reported NR E-CID measurement values contained in periodically triggered measurement reports shall be based on the measurement report mapping requirements specified in clause 10.1.6 for SS-RSRP and CSI-RSRP, and clause 10.1.11 for SS-RSRQ and CSI-RSRQ.

The UE shall not send any measurement reports as long as no corresponding reporting criteria specified in clause 9.1.4 are fulfilled.

9.9.6 PRS-RSRPP measurements

9.9.6.1 Introduction

The requirements in clause 9.9.6.5 shall apply when UE is performing PRS measurement in the configured MG and provided the UE has received a message from LMF via LPP requesting the UE to measure and report PRS-RSRPP measurements defined in TS 38.215 [4].

The requirements in clause 9.9.6.6 shall apply when UE is performing PRS measurement without gap and provided the UE has received a message from LMF via LPP requesting the UE to measure and report PRS-RSRPP measurements defined in TS 38.215 [4].

9.9.6.2 Requirements applicability

The requirements in clause 9.9.6 apply for periodic and triggered PRS-RSRPP measurements, provided:

- PRS-RSRPP related side conditions given in clause 10.1.38 are met for a corresponding Band.

9.9.6.3 Measurement capability

UE PRS-RSRPP measurement capability is as indicated by the UE in *NR-DL-AoD-ProvideCapabilities* according to TS 37.355 [34].

9.9.6.4 Measurement reporting requirements

This requirement assumes that the measurement report is not delayed by other LPP signalling on the DCCH. This measurement reporting delay excludes the delay uncertainty caused by inserting the measurement report into the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$ where TTI_{DCCH} is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

The reported PRS-RSRPP measurement values contained in measurement reports shall be based on the measurement report mapping requirements specified in clauses 10.1.38.3.

The PRS-RSRPP measurement accuracy for all measured PRS resources shall be fulfilled according to the accuracy requirements specified in the clauses 10.1.38.2.

9.9.6.5 Measurement period requirements

For PRS measurement within MG configured to UE, measurement period requirements for PRS-RSRP defined in 9.9.3.5 is re-used for PRS-RSRPP.

9.9.6.6 Measurement Period Requirements without Measurement Gaps

For PRS measurement without MG configured to UE, measurement period requirements for PRS-RSRP defined in 9.9.3.6 is re-used for PRS-RSRPP.

The PRS-RSRPP measurement requirements in this section apply for the first path PRS-RSRP measurement.

9.9.6.7 Void

9.9.6.8 Measurements Period Requirements with both MG and PPW

If the UE is configured with both MG applicable to positioning measurement and PPW, the measurement period requirements for PRS-RSRP defined in 9.9.3.8 is re-used for PRS-RSRPP.

9.10 CSI-RS based L3 measurements

9.10.1 Introduction

This clause contains general requirements on the UE regarding CSI-RS based measurement reporting in RRC_CONNECTED state. The requirements are split in intra-frequency and inter-frequency measurements requirements.

The requirements in this clause apply, provided:

- Only one MO is configured per CSI-RS frequency layer, and
- all CSI-RS resources in the same MO are configured with the same *csi-rs-MeasurementBW*, and
- *associatedSSB* is configured in *CSI-RS-Resource-Mobility* and detectable, and
- all CSI-RS resources in the same MO are configured with the same periodicity, and- the associated SSB is QCLed with the corresponding CSI-RS resources in FR2, and

- the number of CSI-RS resources in any duration that equals to the length of a slot is no larger than UE capability *maxNumberCSI-RS-RRM-RS-SINR*.
- When there are mixed numerologies, the length of a slot is defined based on the smallest SCS

9.10.2 CSI-RS based intra-frequency measurements

9.10.2.1 Introduction

A measurement is defined as a CSI-RS based intra-frequency measurement provided that:

- the SCS of the CSI-RS resource of the neighbour cell configured for measurement is the same as the SCS of the CSI-RS resource on the serving cell indicated for measurement, and
- the CP type of the CSI-RS resource of neighbour cell configured for measurement is the same as the CP type of the CSI-RS resource of the serving cell indicated for measurement, and
 - It is applied for SCS = 60KHz
- the centre frequency of the CSI-RS resource of the neighbour cell configured for measurement is the same as the centre frequency of the CSI-RS resource of the serving cell indicated for measurement

The UE shall be able to identify new intra-frequency cells and perform CSI-RSRP, CSI-RSRQ and CSI-SINR measurements of identified intra-frequency cells if carrier frequency information is provided by PCell or the PSCell.

No measurement gap is needed for intra-frequency CSI-RS resources measurements.

For intra-frequency CSI-RS based measurements, UE may cause scheduling restriction as specified in clause 9.10.2.6.

Note: Extended CP for CSI-RS based measurement is not supported in this release.

9.10.2.2 Requirements applicability

The measurement of the associated SSB follows the same requirements as SSB based measurements defined in 9.2.

The requirements in clause 9.10.2 apply, provided:

- Only one intra-frequency CSI-RS layer per serving cell is configured, and
- The BW of the CSI-RS on the intra-frequency neighbor cell is within the active BWP of the UE, and
- The associated SSB of the CSI-RS resources being identified or measured are detectable, and the CSI-RS resources configured for CSI-RS based L3 measurements are measurable, and
- The bandwidth of CSI-RS resources of intra-MO is the same as that of the CSI-RS resources configured for the serving cell, and
- All CSI-RS resources on one intra-frequency layer are configured within up to two separate windows where each window is up to 5ms, and
- for the case of single window further provided
- The periodicity of the configured CSI-RS resources is 10ms, 20ms or 40ms- for the case of two separate windows further provided
 - The two windows are either both fully non-overlapped with MG or both partially overlapped with MG
 - The periodicity of the configured CSI-RS resources is 20ms or 40ms
- The starting point of the first window is the slot boundary of the serving cell, where the corresponding slot contains the configured L3 CSI-RS resource of the serving cell in the servingCellMO with the smallest offset, and

- The starting point of the second window if configured is determined by an offset of half of the CSI-RS periodicity in slots with regards to the starting point of the first window, and
- Numerology for intra-frequency CSI-RS and data of serving cell are the same.

An intra-frequency cell shall be considered detectable when for each relevant associated SSB:

- SS-RSRP related side conditions given in clauses 10.1.2.1 and 10.1.3.1 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in clauses 10.1.7.1 and 10.1.8.1 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in clauses 10.1.12.1 and 10.1.13.1 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.2 for a corresponding Band.

A CSI-RS resource shall be considered measurable when for each relevant CSI-RS resource:

- CSI-RSRP related side conditions given in clauses 10.1.2.3 and 10.1.3.3 for FR1 and FR2, respectively, for a corresponding Band,
- CSI-RSRQ related side conditions given in clauses 10.1.7.2 and 10.1.8.2 for FR1 and FR2, respectively, for a corresponding Band,
- CSI-SINR related side conditions given in clauses 10.1.12.2 and 10.1.13.2 for FR1 and FR2, respectively, for a corresponding Band,
- CSI_{RP} and CSI-RS $\hat{E}_s/I_{ot}$ according to Annex B.2.12 for a corresponding Band.

9.10.2.3 Number of cells and number of CSI-RS

9.10.2.3.1 Requirements for FR1

For each intra-frequency CSI-RS layer, during each layer 1 measurement period, the UE shall be capable of performing CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements for at least:

- 32 CSI-RSs with different CSI-RS index and/or PCI on the intra-frequency layer, and
- the cells to be monitored based on CSI-RS are the same set or a subset of the cells monitored based on the layer of the associated SSB

9.10.2.3.2 Requirements for FR2

For one single intra-frequency CSI-RS layer in a band, during each layer 1 measurement period, the UE shall be capable of performing CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements for at least:

- 32 CSI-RSs with different CSI-RS index and/or PCI, and
- the cells to be monitored based on CSI-RS are the same set or a subset of the cells monitored based on the layer of the associated SSB.

where this single intra-frequency layer shall be:

- PCC on which UE is configured to report CSI-RS measurement when UE is configured with SA NR operation mode with PCC in the band; or
- PSCC on which UE is configured to report CSI-RS measurement when UE is configured with EN-DC with PSCC in the band; or
- One of the SCCs on which UE is configured to report CSI-RS based measurements when neither PCC nor PSCC is in the same band, so that the selected SCC shall be an SCC where the UE is configured with CSI-RSRP measurement reporting if such SCC exists, otherwise the selected SCC is determined by UE implementation.

The UE shall also be capable of performing CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements for at least 2 CSI-RSs on serving cell for each of the other intra-frequency layer(s) in the same band.

For each FR2 band, UE is only required to measure neighbour cell CSI-RS on the CSI-RS layer, whose associated SSB is on the same SSB layer as the one where UE is required to measure neighbour cell SSB.

9.10.2.4 Measurement Reporting Requirements

Note: The UE is not required to report CSI-RS based L3 measurements when the timing offset between the reference measurement timing and the target CSI-RS in one layer is larger than one CP. If the UE reports CSI-RS based L3 measurements when the timing offset exceeds one CP, the UE is not required to meet the CSI-RS based L3 measurement accuracy requirements for CSI-RSRP, CSI-RSRQ and CSI-SINR in TS 38.133 section 10.1, which apply only when the timing offset is no larger than one CP.

9.10.2.4.1 Periodic Reporting

Reported CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements contained in periodic measurement reports shall meet the requirements in clauses 10.1.2.3, 10.1.3.3, 10.1.7.2, 10.1.8.2, 10.1.12.2 and 10.1.13.2.

9.10.2.4.2 Event-triggered Periodic Reporting

Reported CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements contained in event-triggered periodic measurement reports shall meet the requirements in clauses 10.1.2.3, 10.1.3.3, 10.1.7.2, 10.1.8.2, 10.1.12.2 and 10.1.13.2.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.10.2.4.3.

9.10.2.4.3 Event Triggered Reporting

Reported CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements contained in event triggered measurement reports shall meet the requirements in clauses 10.1.2.3, 10.1.3.3, 10.1.7.2, 10.1.8.2, 10.1.12.2 and 10.1.13.2.

The UE shall not send any event triggered measurement reports as long as no reporting criterion is fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times T_{\text{TTI}_{\text{DCCH}}}$. This measurement reporting delay excludes a delay which caused by no UL resources being available for UE to send the measurement report on.

The event triggered measurement reporting delay, measured without L3 filtering shall be less than the CSI-RS based measurement defined in clause 9.10.2.5. When L3 filtering is used an additional delay can be expected.

9.10.2.5 Intra-frequency measurements without measurement gaps

If a UE is configured with the higher layer parameters *CSI-RS-Resource-Mobility* and *associatedSSB*, the CSI-RS based measurement shall include PSS/SSS detection time of associatedSSB, the time period used to acquire the SFN information and CSI-RS based measurement period without gap.

- PSS/SSS detection time of associatedSSB is the intra-frequency $T_{\text{PSS/SSS_sync_intra}}$ in Clause 9.2.5.1.
- The time period used to acquire the SFN information is equal to 0 if the UE is indicated that the neighbour cell is synchronous with the serving cell (*deriveSSB-IndexFromCell* is enabled). Otherwise, the time period used to acquire the SFN information is $T_{\text{CSI-RS_SFN_intra}}$ as shown in Table 9.10.2.5-3 for FR1. It is assumed that *deriveSSB-IndexFromCell* is always enabled for FR1 TDD and FR2.
- If the associatedSSB, which has been detectable at least for the time period $T_{\text{identify_intra_with_index}}$ defined in clause 9.2.5.1, becomes undetectable for a period ≤ 5 seconds and then the associatedSSB becomes detectable again with the same spatial reception parameter provided the timing to that cell has not changed more than $\pm 3200/2^{\mu}$

T_c , where μ is the SCS configuration as defined in clause 4.2 of TS 38.211 [3], PSS/SSS detection time and time period used to acquire the SFN information are equal to 0.

The measurement period for CSI-RS based intra-frequency measurements without gaps is as shown in table 9.10.2.5-1 and Table 9.10.2.5-2.

Additionally, for a given CSI-RS resource, if the associated SS/PBCH block is configured but not detected by the UE, or if CSI-RS is configured with associated SSB but not QCL-ed to the associated SSB, the UE is not required to monitor the corresponding CSI-RS resource.

Table 9.10.2.5-1: Measurement period for intrafrequency CSI-RS based measurements without gaps(FR1)

DRX cycle	$T_{\text{CSI-RS_measurement_period_intra}}$
No DRX	$\max(200\text{ms}, \text{ceil}(5 \times K_{p_CSI-RS}) \times \text{CSI-RS period}) \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(200\text{ms}, \text{ceil}(1.5 \times 5 \times K_{p_CSI-RS}) \times \max(\text{CSI-RS period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{ceil}(5 \times K_{p_CSI-RS}) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$
NOTE 1: The requirements apply assuming CSI-RS configuration with $\{D=3$ with PRBs $\geq 48\}$. D is frequency domain density for the 1-port CSI-RS for L3 mobility defined in clause 7.4.1 of TS38.211 [6].	

Table 9.10.2.5-2: Measurement period for intrafrequency CSI-RS based measurements without gaps(FR2)

DRX cycle	$T_{\text{CSI-RS_measurement_period_intra}}$
No DRX	$\max(400\text{ms}, \text{ceil}(M_{\text{meas_period_w/o_gaps}} \times K_{p_CSI-RS}) \times \text{CSI-RS period}) \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(400\text{ms}, \text{ceil}(1.5 \times M_{\text{meas_period_w/o_gaps}} \times K_{p_CSI-RS}) \times \max(\text{CSI-RS period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$M_{\text{meas_period_w/o_gaps}} \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$
NOTE 1: The requirements apply assuming CSI-RS configuration with $\{D=3$ with PRBs $\geq 48\}$. D is frequency domain density for the 1-port CSI-RS for L3 mobility defined in clause 7.4.1 of TS38.211 [6].	

$M_{\text{meas_period_w/o_gaps}}$: For a UE supporting power class 1, $M_{\text{meas_period_w/o_gaps}} = 40$. For a UE supporting FR2 power class 2, $M_{\text{meas_period_w/o_gaps}} = 24$. For a UE supporting power class 3, $M_{\text{meas_period_w/o_gaps}} = 24$. For a UE supporting power class 4, $M_{\text{meas_period_w/o_gaps}} = 24$.

$\text{CSSF}_{\text{intra}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{outside_gap},i}$ in clause 9.1.5.

For a UE not supporting *concurrentMeasGap-r17* or for a UE is supporting *concurrentMeasGap-r17* but not configured with concurrent measurement gaps,

- if the intra-frequency CSI-RS resource does not overlap with any measurement gaps, $K_{p_CSI-RS} = 1$;
- if some occasions of the intra-frequency CSI-RS resource is overlap with a measurement gaps, $K_{p_CSI-RS} = 1/(1 - (\text{CSI-RS resource period} / \text{MGRP}))$, where CSI-RS resource period $<$ MGRP, and the MGRP is the periodicity of the measurement gap.
- Otherwise, if a UE which support concurrent measurement gaps and has been configured with concurrent measurement gaps, K_{p_CSI-RS} is the scaling factor for a CSI-RS frequency layer to be measured outside gap which is defined as $K_{p_CSI-RS} = N_{\text{total}} / N_{\text{available}}$

For a window W of duration $\max(\text{CSI-RS period}, \text{MGRP}_{\text{max}})$, where MGRP max is the maximum MGRP across all configured per-UE MG and per-FR MG within the same FR as the CSI-RS frequency layer, and starting at the beginning of any gap occasions covering the CSI-RS resources:

N_{total} is the total number of CSI-RS resources within the window, including those overlapped with other MG occasions within the window, and

$N_{\text{available}}$ is the number of CSI-RS resources that are not overlapped with any other non-dropped MG occasion within the window W, after accounting for MG collisions by applying the selected gap collision rule.

$K_{p_CSI-RS} = 1$ when $N_{\text{available}} = 0$

Table 9.10.2.5-3: Time period for SFN acquisition for intra-frequency CSI-RS based measurements without gaps(FR1)

DRX cycle	$T_{\text{CSI-RS_SFN_intra}}$
No DRX	$\max(200\text{ms}, \text{ceil}(5 \times K_p) \times \text{SMTC period})^{\text{Note 1}} \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(2000\text{ms}, \text{ceil}(1.5 \times 5 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times K_p) \times \text{DRX cycle} \times \text{CSSF}_{\text{intra}}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	
NOTE 2: $K_p_{\text{CSI-RS}}$ is applicable for a UE supporting concurrent gaps	

9.10.2.6 Scheduling availability of UE during CSI-RS based intra-frequency measurements

UE is required to be capable of measuring without measurement gaps when CSI-RS resources are completely contained in the active BWP of the UE. Note the configured CSI-RS symbol is indicated in *firstOFDMsymbolInTimeDomain* included in *CSI-RS-ResourceConfigMobility* for RRM. When UE is required to perform CSI-RS based RRM measurements, and any of the conditions in the following clauses is met, there are restrictions on the scheduling availability; otherwise, there is no scheduling restriction. Note same numerology for intra-frequency CSI-RS and data of serving cell is considered in this release.

9.10.2.6.1 Scheduling availability of UE performing CSI-RS based measurements in TDD bands

When UE performs CSI-RS intra-frequency measurements in a TDD band,

- UE is not expected to transmit PUCCH/PUSCH/SRS on configured CSI-RS resource symbols, and on 1 OFDM symbol before and after each consecutively configured CSI-RS symbols.

When TDD intra-band carrier aggregation is performed, the scheduling restrictions due to a given serving cell also apply to all other serving cells in the same band on the symbols that fully or partially overlap with the aforementioned restricted symbols.

9.10.2.6.2 Scheduling availability of UE performing CSI-RS based measurements in FR2

When the UE performs CSI-RS based intra-frequency measurements for L3 mobility management in FR2, the following restrictions apply.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on the configured CSI-RS symbol within the configured slot as indicated in *slotConfig* of the corresponding CSI-RS resource to be measured for mobility.

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions due to a given serving cell also apply to all other serving cells in the same band on the symbols that fully or partially overlap with aforementioned restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 serving cells in the bands due to CSI-RSRP, CSI-RSRQ or CSI-SINR measurement on an FR2 intra-frequency cell in different bands, provided that UE is capable of independent beam management on this FR2 band pair.

9.10.3 CSI-RS based Inter-frequency measurements

9.10.3.1 Introduction

A measurement is defined as a CSI-RS based inter-frequency measurement provided it is not defined as an intra-frequency measurement according to clause 9.10.2.

If a UE is configured with the higher layer parameter *CSI-RS-Resource-Mobility* and the higher layer parameter *associatedSSB* is configured, the UE shall be able to identify inter-frequency cells indicated for measurement and perform CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements of identified inter-frequency cells.

When measurement gaps are needed, the UE is not expected to detect the associated SSB nor perform measurement of the CSI-RS resource configured in *CSI-RS-Resource-Mobility* on an inter-frequency measurement object which start earlier than the gap starting time + switching time, and ends later than the gap end – switching time. When the inter-frequency cells are in FR2 and the per-FR gap is configured to the UE in EN-DC, SA NR, NE-DC and NR-DC, or the serving cells are in FR2, the inter-frequency cells are in FR2 and the per-UE gap is configured to the UE in SA NR and NR-DC, the switching time is 0.25ms. Otherwise the switching time is 0.5ms.

If a UE is configured with multiple concurrent gaps, the requirements in this clause shall apply when the measurement gap pattern is configured to be associated to the CSI-RS resources of the inter-frequency layer.

9.10.3.2 Requirements applicability

The associated SSB layer of the CSI-RS follows the same requirements as SSB based measurements defined in 9.3.

The requirements in clause 9.10.3 apply, provided:

- The associated SSB of the cell being identified or measured is detectable, and
- All CSI-RS resources on one inter-frequency layer are configured within a window of up to 5ms, and
- The periodicity of the configured CSI-RS resources is 10ms, 20ms or 40ms, and
- CSI-RS resources for measurements and the associated SSB for cell identification are configured within measurement gap.

An inter-frequency cell shall be considered detectable when for each relevant associated SSB:

- SS-RSRP related side conditions given in clauses 10.1.4.1 and 10.1.5.1 for FR1 and FR2, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in clauses 10.1.9.1 and 10.1.10.1 for FR1 and FR2, respectively, for a corresponding Band,
- SS-SINR related side conditions given in clauses 10.1.14.1 and 10.1.15.1 for FR1 and FR2, respectively, for a corresponding Band,
- SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.3 for a corresponding Band.

A CSI-RS resource shall be considered measurable when for each relevant CSI-RS resource:

- CSI-RSRP related side conditions given in clauses 10.1.4.3 and 10.1.5.3 for FR1 and FR2, respectively, for a corresponding Band,
- CSI-RSRQ related side conditions given in clauses 10.1.9.2 and 10.1.10.2 for FR1 and FR2, respectively, for a corresponding Band,
- CSI-SINR related side conditions given in clauses 10.1.14.2 and 10.1.15.2 for FR1 and FR2, respectively, for a corresponding Band,
- CSI_{RP} and CSI-RS $\hat{E}_s/I_{ot}$ according to Annex B.2.13 for a corresponding Band.

9.10.3.3 Number of cells and number of CSI-RS resources

9.10.3.3.1 Requirements for FR1

For each inter-frequency CSI-RS layer, during each layer 1 measurement period, the UE shall be capable of performing CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements for at least:

- 14 CSI-RSs with different CSI-RS index and/or PCI, and
- The cells to be monitored based on CSI-RS are the same set or a subset of the cells monitored based on the layer of the associated SSB.

9.10.3.3.2 Requirements for FR2

For each inter-frequency CSI-RS layer, during each layer 1 measurement period, the UE shall be capable of performing CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements for at least:

- 24 CSI-RSs with different CSI-RS index and/or PCI, and
- The cells to be monitored based on CSI-RS are the same set or a subset of the cells monitored based on the layer the associated SSB.

9.10.3.4 Measurements reporting requirements

Note: The UE is not required to report CSI-RS based L3 measurements when the timing offset between the reference measurement timing and the target CSI-RS in one layer is larger than one CP. If the UE reports CSI-RS based L3 measurements when the timing offset exceeds one CP, the UE is not required to meet the CSI-RS based L3 measurement accuracy requirements for CSI-RSRP, CSI-RSRQ and CSI-SINR in TS 38.133 section 10.1, which apply only when the timing offset is no larger than one CP.

9.10.3.4.1 Periodic Reporting

Reported CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.4.2, 10.1.5.2, 10.1.9.2, 10.1.10.2, 10.1.14.2 and 10.1.15.2..

9.10.3.4.2 Event-triggered Periodic Reporting

Reported CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.4.2, 10.1.5.2, 10.1.9.2, 10.1.10.2, 10.1.14.2 and 10.1.15.2..

The first report in event triggered periodic measurement reporting shall meet the requirements specified in clause 9.10.3.4.3.

9.10.3.4.3 Event-triggered Reporting

Reported CSI-RSRP, CSI-RSRQ, and CSI-SINR measurements contained in periodically triggered measurement reports shall meet the requirements in clauses 10.1.4.2, 10.1.5.2, 10.1.9.2, 10.1.10.2, 10.1.14.2 and 10.1.15.2..

The UE shall not send any event triggered measurement reports, as long as no reporting criteria are fulfilled.

The measurement reporting delay is defined as the time between an event that will trigger a measurement report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is: $2 \times TTI_{DCCH}$. This measurement reporting delay excludes a delay which caused by no UL resources for UE to send the measurement report.

The event triggered measurement reporting delay, measured without L3 filtering shall be within CSI-RS based measurement defined in clause . When L3 filtering is used an additional delay can be expected.

9.10.3.5 Inter frequency measurements with measurement gaps

When measurement gaps are provided, if configured with the higher layer parameters *CSI-RS-Resource-Mobility* and *associatedSSB*, the UE shall be able to identify a new detectable CSI-RS based inter frequency cell within $T_{\text{CSI-RS_identify_inter}}$,

$$T_{\text{CSI-RS_identify_inter}} = (T_{\text{PSS/SSS_sync}} + T_{\text{CSI-RS_measurement_period_inter}} + T_{\text{CSI-RS_SFN_inter}}) \text{ ms}$$

Where:

$T_{\text{PSS/SSS_sync}}$ is the time period used in PSS/SSS detection which is determined according to $T_{\text{PSS/SSS_sync_inter}}$ in clause 9.3.4,

$T_{\text{CSI-RS_SFN_inter}}$ is the time period used to acquire the SFN information of the cell being measured, which is shown in Table 9.10.3.5-3 for FR1 and equals inter-frequency TSSB_time_index_inter in Clause 9.3.4 for FR2,

$T_{\text{CSI-RS_measurement_period_inter}}$: equal to a measurement period of CSI-RS based measurement given in table 9.10.3.5-1 and table 9.10.3.5-2..

$M_{\text{meas_period_inter}}$: For a UE supporting FR2 power class 1 or 5, $M_{\text{meas_period_inter}} = 8 \times N$ samples. For a UE supporting FR2 power class 2, $M_{\text{meas_period_inter}} = 5 \times N$ samples. For a UE supporting FR2 power class 3, $M_{\text{meas_period_inter}} = 5 \times N$ samples. For a UE supporting FR2 power class 4, $M_{\text{meas_period_inter}} = 5 \times N$ samples. Note that scaling factor $N = [8]$.

$\text{CSSF}_{\text{inter}}$: it is a carrier specific scaling factor and is determined according to $\text{CSSF}_{\text{within_gap},i}$ in clause 9.1.5 for measurement conducted within measurement gaps.

If a UE which supports concurrent measurement gaps has been configured with concurrent measurement gaps, $K_{\text{p_CSI-RS}}$ is the scaling factor for a CSI-RS frequency layer to be measured within the associated measurement gap which is defined as $K_{\text{p_CSI-RS}} = N_{\text{total}} / N_{\text{available}}$. $K_{\text{p_CSI-RS}} = 1$ for UE not configured with concurrent measurement gaps.

- For a window W of duration $\max(\text{CSI-RS period}, \text{MGRP_max})$, where MGRP max is the maximum MGRP across all configured per-UE MG and per-FR MG within the same FR as the CSI-RS frequency layer, and starting at the beginning of any gap occasions covering the CSI-RS resources.:
- N_{total} is the total number of associated gap occasions covering CSI-RS resources within the window, including both dropped and non-dropped instances of the associated measurement gap within the window, and
- $N_{\text{available}}$ is the number of non-dropped associated gap occasions covering CSI-RS resources within the window W , after accounting for MG collisions by applying the selected gap collision rule.
- Requirements do not apply if $N_{\text{available}} = 0$

Additionally, for a given CSI-RS resource, if the associated SSB is configured but not detected by the UE, or if CSI-RS configured with associated SSB but not QCL-ed to the associated SSB, the UE is not required to monitor the corresponding CSI-RS resource.

Table 9.10.3.5-1: Measurement period for CSI-RS based inter-frequency measurements with gaps (FR1)

Condition ^{NOTE1,2}	$T_{\text{CSI-RS_measurement_period_inter}}$
No DRX	$\text{Max}(200\text{ms}, \text{ceil}(8 \times K_{\text{p_CSI-RS}}) \times \text{Max}(\text{MGRP}, \text{CSI-RS period})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(200\text{ms}, \text{Ceil}(8 \times 1.5 \times K_{\text{p_CSI-RS}})) \times \text{Max}(\text{MGRP}, \text{CSI-RS period}, \text{DRX cycle})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(8 \times K_{\text{p_CSI-RS}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: If UE support concurrent gaps and multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the CSI-RS resources of the inter-frequency layer.	
NOTE 4: $K_{\text{p_CSI-RS}}$ is applicable for a UE supporting concurrent gaps	

Table 9.10.3.5-2: Measurement period for CSI-RS based inter-frequency measurements with gaps (FR2)

Condition ^{NOTE1,2}	$T_{\text{CSI-RS_measurement_period_inter}}$
No DRX	$\text{Max}(400 \text{ ms}, \text{ceil}(M_{\text{meas_period_inter}} \times K_{\text{p_CSI-RS}}) \times \text{Max}(\text{MGRP, CSI-RS period})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(400 \text{ ms}, \text{ceil}(1.5 \times M_{\text{meas_period_inter}} \times K_{\text{p_CSI-RS}}) \times \text{Max}(\text{MGRP, CSI-RS period, DRX cycle})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(M_{\text{meas_period_inter}} \times K_{\text{p_CSI-RS}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: If UE support concurrent gaps and multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to the CSI-RS resources of the inter-frequency layer.	
NOTE 4: $K_{\text{p_CSI-RS}}$ is applicable for a UE supporting concurrent gaps	

Table 9.10.3.5-3: Time period for SFN acquisition for interfrequency CSI-RS based measurements with gaps(FR1)

Condition ^{NOTE1,2}	$T_{\text{CSI-RS_SFN_inter}}$
No DRX	$\text{Max}(200\text{ms}, \text{ceil}(5 \times K_{\text{p_CSI-RS}}) \times \text{Max}(\text{MGRP, SMTc period})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $\leq 320\text{ms}$	$\text{Max}(200\text{ms}, \text{Ceil}(5 \times 1.5 \times K_{\text{p_CSI-RS}}) \times \text{Max}(\text{MGRP, SMTc period, DRX cycle})) \times \text{CSSF}_{\text{inter}}$
DRX cycle $> 320\text{ms}$	$\text{Ceil}(5 \times K_{\text{p_CSI-RS}}) \times \text{DRX cycle} \times \text{CSSF}_{\text{inter}}$
NOTE 1: DRX or non DRX requirements apply according to the conditions described in clause 3.6.1	
NOTE 2: In EN-DC operation, the parameters, timers and scheduling requests referred to in clause 3.6.1 are for the secondary cell group. The DRX cycle is the DRX cycle of the secondary cell group.	
NOTE 3: If UE support concurrent gaps and multiple concurrent gaps are configured, the MGRP is the periodicity of the MG pattern associated to <i>associatedSSB</i> .	
NOTE 4: $K_{\text{p_CSI-RS}}$ is applicable for a UE supporting concurrent gaps	

9.11 NR measurements with autonomous gaps

9.11.1 Introduction

The requirements in this clause are applicable for CGI identification of an intra frequency and inter frequency NR target cell.

The requirements in this clause are specified for CGI identification of an NR target cell and are applicable for a UE:

- in RRC_CONNECTED state, and
- configured with SA or NR-DC or NE-DC operation mode, or with EN-DC operation mode for CGI identification requested by NR PSCell.

The overall CGI reporting delay is defined in clause 9.11.3.

9.11.2 CGI identification of an NR cell with autonomous gaps

The UE shall identify and report the CGI of a known NR target cell when requested by the network for the purpose of reportCGI. Only one cell is provided to the UE with *cellForWhichToReportCGI* for identifying the CGI. The UE may make autonomous gaps in both downlink reception and uplink transmission for receiving MIB and SIB1 message according to clause 5.5.3 of TS 38.331 [2]. Note that a UE is not required to use autonomous gap if *useAutonomousGaps* is set to false. If autonomous gaps are used for measurement with the purpose of reportCGI, regardless of whether DRX is used or not, or whether SCell(s) are configured or not, the UE shall be able to identify a new CGI of NR cell within:

$$T_{\text{identify_CGI}} = (T_{\text{MIB}} + T_{\text{SIB1}}) \text{ ms}$$

Where:

T_{MIB} is the time period used to acquire MIB message. $T_{\text{MIB}} = 6 * T_{\text{SMTC}}$ ms for target cell carrier frequency on FR1 and $T_{\text{MIB}} = 25 * T_{\text{SMTC}}$ ms for target cell carrier frequency on FR2.

T_{SIB1} is the time period used to acquire SIB1 message. $T_{\text{SIB1}} = 6 * T_{\text{RMSI-scheduling}}$ ms.

Where T_{SMTC} is the SMTC periodicity configured for the target cell measurement, and $T_{\text{RMSI-scheduling}}$ is

- the maximum between the periodicity with which the SIB1 is actually transmitted by the NR target cell and 20ms when SSB and RMSI CORESET multiplexing pattern is 1
- the maximum between the periodicity with which the SIB1 is actually transmitted by the NR target cell and T_{SMTC} when SSB and RMSI CORESET multiplexing pattern is 2 or 3.

The requirement for identifying the CGI of an NR cell within $T_{\text{identify_CGI}}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [2] is used.

Within the time $T_{\text{identify_CGI}}$, over which the UE identifies the CGI of an NR cell, the UE shall fulfil interruption requirements specified in,

- Clause 8.2.1.2.16 for NR serving cells and Clause 7.32.2.15 in TS36.133 [15] for E-UTRA serving cells if the UE is configured with EN-DC operation mode,
- Clause 8.2.2.2.14 if the UE is configured with SA operation mode,
- Clause 8.2.3.2.14 for NR serving cells and Clause 7.36.2.14 in TS36.133 [15] for E-UTRA serving cells if the UE is configured with NE-DC operation mode,
- Clause 8.2.4.2.11 if the UE is configured with NR-DC operation mode.

In the requirement a cell is known if,

- During the last 5 seconds for FR1 or 3 seconds for FR2 before the reception of the report CGI command:
 - The UE has sent a valid L3-RSRP measurement report with SSB index for the target cell and
- During MIB decoding at least reported SSBs remains detectable according to the cell identification conditions specified in clauses 9.2 or 9.3 of TS 38.133, and
- During SIB1 decoding the SSB used for MIB decoding remains detectable according to the cell identification conditions specified in clauses 9.2 or 9.3 of TS 38.133, and
- During MIB decoding, the SSB for MIB decoding remains detectable with $\text{SNR} \geq -3\text{dB}$
- During SIB1 decoding, the PDSCH for SIB1 decoding remains detectable with $\text{SNR} \geq -3\text{dB}$

9.11.3 CGI reporting delay

The CGI reporting delay is defined as the time between a command that will trigger a CGI report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of $2 * T_{\text{TI_DCCH}}$ resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The CGI reporting delay shall be less than $T_{\text{identify_CGI}}$ defined in clause 9.11.2 plus RRC procedure delay defined in clause 12 in TS 38.331 [2], and additional 20ms margin if target cell is on FR2.

9.11A NR measurements with autonomous gaps for RedCap

9.11A.1 Introduction

The requirements in this clause are applicable for CGI identification of an intra frequency and inter frequency NR target cell.

The requirements in this clause are specified for CGI identification of an NR target cell and are applicable for a UE:

- in RRC_CONNECTED state, and
- configured with SA operation mode.

The overall CGI reporting delay is defined in clause 9.11A.3.

9.11A.2 CGI identification of an NR cell with autonomous gaps

The UE shall identify and report the CGI of a known NR target cell when requested by the network for the purpose of reportCGI. Only one cell is provided to the UE with *cellForWhichToReportCGI* for identifying the CGI. The UE may make autonomous gaps in both downlink reception and uplink transmission for receiving MIB and SIB1 message according to clause 5.5.3 of TS 38.331 [2]. Note that a UE is not required to use autonomous gap if *useAutonomousGaps* is set to false. If autonomous gaps are used for measurement with the purpose of reportCGI, regardless of whether DRX is used or not, the UE shall be able to identify a new CGI of NR cell within:

$$T_{\text{identify_CGI_redcap}} = (T_{\text{MIB_redcap}} + T_{\text{SIB1_redcap}}) \text{ ms}$$

Where:

For 2 Rx RedCap UE:

$T_{\text{MIB_redcap}}$ is the time period used to acquire MIB message. $T_{\text{MIB_redcap}} = 6 * T_{\text{SMTC}}$ ms for target cell carrier frequency on FR1 and $T_{\text{MIB_redcap}} = 25 * T_{\text{SMTC}}$ ms for target cell carrier frequency on FR2.

$T_{\text{SIB1_redcap}}$ is the time period used to acquire SIB1 message. $T_{\text{SIB1_redcap}} = 6 * T_{\text{RMSI-scheduling}}$ ms.

For 1 Rx RedCap UE:

$T_{\text{MIB_redcap}}$ is the time period used to acquire MIB message. $T_{\text{MIB_redcap}} = 6 * T_{\text{SMTC}}$ ms for target cell carrier frequency on FR1.

$T_{\text{SIB1_redcap}}$ is the time period used to acquire SIB1 message. $T_{\text{SIB1_redcap}} = 12 * T_{\text{RMSI-scheduling}}$ ms.

Where T_{SMTC} is the SMTC periodicity configured for the target cell measurement, and $T_{\text{RMSI-scheduling}}$ is

- the periodicity with which the SIB1 is actually transmitted by the NR target cell when SSB and RMSI CORESET multiplexing pattern is 1
- the maximum between the periodicity with which the SIB1 is actually transmitted by the NR target cell and T_{SMTC} when SSB and RMSI CORESET multiplexing pattern is 2 or 3.

The requirement for identifying the CGI of an NR cell within $T_{\text{identify_CGI_redcap}}$ is applicable when no DRX is used as well as when any of the DRX cycles specified in TS 38.331 [2] is used.

Within the time $T_{\text{identify_CGI_redcap}}$, over which the UE identifies the CGI of an NR cell, the UE shall fulfil interruption requirements specified in,

- Clause 9.11A.4 if the UE is configured with SA operation mode.

In the requirement a cell is known if,

- During the last 5 seconds for FR1 or 3 seconds for FR2 before the reception of the report CGI command:
 - The UE has sent a valid L3-RSRP measurement report with SSB index for the target cell and
- During MIB decoding at least reported SSBs remains detectable according to the cell identification conditions specified in clauses 9.2B or 9.3B of TS 38.133, and
- During SIB1 decoding the SSB used for MIB decoding remains detectable according to the cell identification conditions specified in clauses 9.2B or 9.3B of TS 38.133, and
- During MIB decoding, the SSB for MIB decoding remains detectable with $\text{SNR} \geq -3\text{dB}$
- During SIB1 decoding, the PDSCH for SIB1 decoding remains detectable with $\text{SNR} \geq -3\text{dB}$

9.11A.3 CGI reporting delay

The CGI reporting delay is defined as the time between a command that will trigger a CGI report and the point when the UE starts to transmit the measurement report over the air interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty of $2 \times T_{\text{TTI}_{\text{DCCH}}}$ resulting when inserting the measurement report to the TTI of the uplink DCCH. This measurement reporting delay excludes any delay caused by lack of UL resources for UE to send the measurement report.

The CGI reporting delay shall be less than $T_{\text{identify_CGI_redcap}}$ defined in clause 9.11A.2 plus RRC procedure delay defined in clause 12 in TS 38.331 [2], and additional 20ms margin if target cell is on FR2.

9.11A.4 CGI reporting scheduling restriction

When a RedCap UE is identifying CGI of an NR cell with autonomous gaps, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/TRS/CSI-RS for CQI on PCell for the following slots:

- with up to $K1$ interruptions with interrupted slots up to $X1$ specified in Table 9.11A.4-1 for each interruption during MIB decoding time period $T_{\text{MIB_redcap}}$ (ms) specified in clause 9.11A.2.
- with up to $L1$ interruptions with interrupted slots up to $Y1$ specified in Table 9.11A.4-1 during SIB1 decoding time period $T_{\text{SIB1_redcap}}$ (ms) specified in clause 9.11A.2 for SSB and CORESET for RMSI scheduling multiplexing patterns 1.
- with up to $L2$ interruptions with interrupted slots up to interruption length $Y2$ specified in Table 9.11A.4-1 during SIB1 decoding time period $T_{\text{SIB1_redcap}}$ (ms) specified in clause 9.11A.2 for SSB and CORESET for RMSI scheduling multiplexing patterns 2 and 3.

Where:

- $K1 = 6$ for the target cell carrier frequency on FR1 and $K1 = 25$ for the target cell carrier frequency on FR2, and
- $L1 = T_{\text{SIB1_redcap}} / 20$ and
- $L2 = T_{\text{SIB1_redcap}} / T_{\text{SMTC}}$, where T_{SMTC} is the periodicity of the SMTC occasion configured for the target cell carrier.

Table 9.11A.4-1: Interruption length $X1$, $Y1$ and $Y2$ during measurements with autonomous gaps

μ	NR Slot length (ms) of victim cell	Interruption length $X1$ (slots)	Interruption length $Y1$ (slots)	Interruption length $Y2$ (slots)
0	1	6	7	6
1	0.5	12	13	10
2	0.25	24	25	19
3	0.125	48	49	37

9.12 Measurement for Propagation Delay Compensation

9.12.1 Introduction

The requirements in this clause are applicable for UE capable of RTT-based propagation delay compensation based on PRS/TRS and SRS, where the UE is configured with *measObjectRxTxDiff* in *MeasObjectToAddModList* defined in TS38.331 [2].

9.12.2 Requirements Applicability

The requirements in clause 9.12 apply for periodic triggered UE Rx-Tx time difference measurements, provided:

- If UE Rx-Tx time difference measurement is based on PRS, the related side conditions given in clause 10.1.39.2 are met for a corresponding band.
- If UE Rx-Tx time difference measurement is based on TRS, the related side conditions given in clause 10.1.39.3 are met for a corresponding band.
- SRS is configured on at least one of the PCell.

All measurement requirements specified in clause 9.12.4 shall apply when no DRX is in use as well as for when DRX is in use (clause 3.6.1) for any DRX configuration specified in TS 38.331 [2].

9.12.3 Measurement Capability

If UE Rx-Tx time difference measurement is based on PRS, the capability is as indicated by the UE in *rtt-BasedPDC-PRS-r17* in TS38.331 [2].

If UE Rx-Tx time difference measurement is based on TRS, the capability is as indicated by the UE in *rtt-BasedPDC-CSI-RS-ForTracking-r17* in TS38.331 [2].

9.12.4 Measurement period requirements

9.12.4.1 PRS Measurement Period

When UE is configured with *prs-Ref-r17* in *MeasObjectRxTxDiff-r17* defined in TS 38.331 [2] and provided with PRS resource configuration, the UE shall be able to measure UE Rx-Tx time difference on PCell within the measurement period $T_{\text{UERx-Tx,PRS}}$, where:

$$T_{\text{UERx-Tx,PRS}} = \left\lceil \frac{N_{\text{PRS}}^{\text{slot}}}{N'} \right\rceil * N_{\text{sample}} * K_{\text{layer3}} * \text{LCM}(T_{\text{PRS}}, T_{\text{DRX}})$$

Where:

$N_{\text{PRS}}^{\text{slot}}$ is the maximum number of DL PRS resources configured in a slot,

N' is UE capability for number of DL PRS resources that it can process in a slot corresponding to *maxNumberPRS-ResourceProcessedPerSlot-r17* as specified in TS38.331 [2],

N_{sample} is the number of UE Rx-Tx time difference measurement samples and $N_{\text{sample}} = 4$,

T_{PRS} is the PRS resource periodicity specific for RTT-based propagation delay compensation,

T_{DRX} is the DRX cycle length when DRX is in use, 1ms otherwise.

K_{layer3} is

$N_{\text{total}} / N_{\text{available}}$, when $N_{\text{available}} > 0$

Where,

- For a window W of duration $\text{LCM}(T_{\text{PRS}}, \text{MGRP_max}, T_{\text{SMTC}})$ and starting at the beginning of any PRS resource occasion, where T_{SMTC} is the periodicity of SMTC for intra-frequency measurement without gap and MGRP max is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as PCell for a UE that support *concurrentMeasGap-r17* and is configured with concurrent measurement gaps, otherwise MGRP max is the MGRP of configured per-UE measurement gap or per-FR measurement gap within the same FR as PCell:
- N_{total} is the total number of PRS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
- $N_{\text{available}}$ is the number of PRS resource occasions that are not overlapped with:
 - For FR1: any measurement gap occasions within window W . And for a UE supporting *concurrentMeasGap-r17* after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3 within the window W

- For FR2: any measurement gap occasions nor any SMTC occasions within window W. And for a UE supporting *concurrentMeasGap-r17* after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3 nor any SMTC occasions within the window W.

No requirements shall apply if $N_{\text{available}}=0$.

UE is only required to perform UE Rx-Tx time difference on PRS within the active DL BWP.

When UE is configured to perform UE Rx-Tx time difference measurement based on PRS, the requirements apply provided that the SCS of the PRS is same as that of the active BWP on PCell.

For FR2, the requirements apply if QCL information is provided for all the PRS resources in the resource set and for each resource one RS has QCL-TypeD.

If PRS resources overlap with Type 1A/1B/2 PPW, the UE is allowed longer measurement period to measure UE Rx-Tx time difference on PCell.

9.12.4.2 TRS Measurement Period

When UE is configured with *csi-RS-Ref-r17* in *MeasObjectRxTxDiff-r17* defined in TS 38.331 [2] and provided with TRS resource configuration, the UE shall be able to measure UE Rx-Tx time difference on PCell within the measurement period $T_{\text{UERxTx,TRS}}$, where:

$$T_{\text{UERxTx,TRS}} = N_{\text{sample}} * K_{\text{layer3}} * \text{LCM}(T_{\text{TRS}}, T_{\text{DRX}})$$

Where

N_{sample} is the number of UE Rx-Tx time difference measurement samples and N_{sample} is [4],

T_{TRS} is the TRS resource periodicity specific for RTT-based propagation delay compensation,

T_{DRX} is the DRX cycle length when DRX is in use, 1ms otherwise.

K_{layer3} is

$$N_{\text{total}} / N_{\text{available}} \text{ when } N_{\text{available}} > 0$$

Where,

- For a window W of duration $\text{LCM}(T_{\text{TRS}}, \text{MGRP}_{\text{max}}, T_{\text{SMTC}})$ and starting at the beginning of any TRS resource occasion, where T_{SMTC} is the periodicity of SMTC for intra-frequency measurement without gap and MGRP_{max} is the maximum MGRP across all configured per-UE measurement gaps and per-FR measurement gaps within the same FR as PCell for a UE that support *concurrentMeasGap-r17* and is configured with concurrent measurement gaps, otherwise MGRP_{max} is the MGRP of configured per-UE measurement gap or per-FR measurement gap within the same FR as PCell:
- N_{total} is the total number of TRS resource occasions within the window, including those overlapped with measurement gap occasions or SMTC occasions within the window, and
- $N_{\text{available}}$ is the number of TRS resource occasions that are not overlapped with
 - For FR1: any measurement gap occasions within window W. And for a UE supporting *concurrentMeasGap-r17* after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3 within the window W
 - For FR2: any measurement gap occasions nor any SMTC occasions within window W. And for a UE supporting *concurrentMeasGap-r17* after accounting for measurement gap collisions by applying the measurement gap collision rule in section 9.1.8.3 nor any SMTC occasions within the window W.

No requirements shall apply if $N_{\text{available}}=0$.

UE is only required to perform UE Rx-Tx time difference on TRS within the active DL BWP. When UE is configured to perform UE Rx-Tx time difference measurement based on TRS, the requirements apply provided that the SCS of the TRS is same as that of the active BWP on PCell.

For FR2, the requirements apply if QCL information is provided for all the TRS resources in the resource set and for each resource one RS has QCL-TypeD.

If TRS resources overlap with Type 1A/1B/2 PPW, the UE is allowed longer measurement period to measure UE Rx-Tx time difference on PCell.

9.12.5 Measurement Reporting Requirements

The UE shall report UE Rx-Tx time difference measurement results if UE supports *gNB-SideRTT-BasedPDC-r17*.

The measurement reporting delay excludes the delay uncertainty caused by inserting the measurement report into the TTI of the uplink DCCH. The delay uncertainty is: $2 \times \text{TTIDCCH}$ where TTIDCCH is the duration of subframe or slot or subslot when the measurement report is transmitted on the PUSCH with subframe or slot or subslot duration. This measurement reporting delay excludes any delay caused by no UL resources for UE to send the measurement report.

The UE Rx-Tx time difference measurement values contained in measurement report shall be based on the measurement report mapping requirements specified in clause 10.1.25.3, with $k = 5$.

The UE Rx-Tx time difference measurement accuracy shall be fulfilled according to the accuracy requirements specified in clause 10.1.39.2 and 10.1.39.3 for PRS and TRS, respectively.

9.12.6 Scheduling availability during measurement for Propagation Delay Compensation

During measurement for Propagation Delay Compensation in an FR2 cell,

- For the case where the PRS or TRS for PDC measurement is QCLed with active TCI state for PDCCH/PDSCH, there are no scheduling restrictions due to PDC measurement performed based on PRS or TRS.
- Otherwise, the UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on symbols corresponding to the PRS or TRS resource configured for PDC measurement.

9.12.7 Measurement restriction for measurement for Propagation Delay Compensation

During measurement for Propagation Delay Compensation in an FR2 cell, when the PRS or TRS for PDC measurement on one CC is in the same OFDM symbol as SSB or CSI-RS for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both PRS or TRS for PDC measurement and the other RS if they are not QCL-ed w.r.t. QCL-TypeD, or the QCL information is not known to UE. Longer measurement period for PRS or TRS for PDC measurement is expected.

9.13 L1-RSRP measurements for a cell with different PCI from serving cell

9.13.1 Introduction

When configured by the network, the UE shall be able to perform L1-RSRP measurements of configured measurement resources from a cell with different PCI in addition to serving cell (PCI indicated in *additionalPCI-r17*), with the measurement resources configured as SSBs of the cell with different PCI.

The UE shall be able to measure all SSB resources of the cell with different PCI in *csi-SSB-ResourceSet* within the CSI-ResourceConfig settings for the active BWP, while the *additionalPCI-r17* of the SSB resources are different from serving cell PCI. The number of resources, including the number of resources configured for serving cell L1-RSRP measurement in 9.5, does not exceed the UE capability indicated by *beamManagementSSB-CSI-RS*.

The UE shall report the measurement quantity (*reportQuantity*) and send periodic, semi-persistent or aperiodic reports, according to the higher layer parameter *reportConfigType* of each reporting setting *CSI-ReportConfig* for the active BWP.

9.13.2 Requirements Applicability

The requirements in the clause 9.13 are applicable to inter-cell beam management and inter-cell multi-TRP scenarios.

The requirements in clause 9.13 apply, provided the SSB from cell with PCI different from serving cell configured for L1-RSRP if the following conditions are met:

- the number of cells with PCI different from serving cells $N_{\max} = 1$ for FR2 and $N_{\max} = \max N_{\text{rofAdditionalPCI}}$ for FR1. Where, $\max N_{\text{rofAdditionalPCI}}$ is defined in TS 38.331 [2].
- The SSB from the cell with different PCI completely contained in the active BWP or associated with initial downlink BWP of the UE
- The SSB of the cell with different PCI from serving cell has the same SCS, SFN offset and center frequency as the SSB of the serving cell
- The timing difference of arrival at UE between the SSBs of serving cell and cell with different PCI is less than CP length of the corresponding SCS
- The cell with different PCI from serving cell is known
- The SSB resources configured for L1-RSRP measurements are measurable

An SSB resource configured for L1-RSRP for cell with different PCI from serving cell shall be considered measurable when for each relevant SSB the following conditions are met:

- L1-RSRP related side conditions given in clauses 10.1.19.1 and 10.1.20.1 for FR1 and FR2, respectively, for a corresponding band,
- SSB_{RP} and SSB $\hat{E}_s/I_{\text{ot}}$ according to Annex B.2.4.1 for a corresponding band.

The cell with different PCI from serving cell is considered as known if the following conditions are met in this requirement:

- The UE has sent a valid L3 measurement report during the last 5 seconds, and
- The SSB from the cell with different PCI remains detectable according to the cell identification requirements specified in clause 9.2.

Otherwise, the cell is unknown.

In case the SSB resources configured for L1-RSRP measurements outside SMTCS are overlapped with PDSCH/PDCCH that is associated to serving cell, L1-RSRP measurement performance degradation is expected.

9.13.3 Measurement Reporting Requirements

The UE shall send L1-RSRP reports only for report configurations configured for the active BWP.

The UE shall report the L1-RSRP value as a 7-bit value in the range [-140, -44] dBm with 1dB step size according to clause 10.1.19 for FR1 and 10.1.20 for FR2 if *nrofReportedRS* is configured to one. If *nrofReportedRS* is configured to be larger than one, or if *groupBasedBeamReporting-r17* is enabled, the UE shall use differential L1-RSRP based reporting as defined in clause 10.1.19 for FR1 and 10.1.20 for FR2. The differential L1-RSRP is quantized to a 4-bit

value with 2dB step size. The mapping between the reported L1-RSRP value and the measured quantity is described in 10.1.6.

In EN-DC and NE-DC operation, when the UE is configured to perform E-UTRA SRS carrier-based switching an additional delay can be expected in FR1 if the UE is capable of per-FR gap, or an additional delay can be expected in both FR1 and FR2 if the UE is not capable of per-FR gap.

9.13.3.1 Periodic Reporting

Reported L1-RSRP measurements contained in periodic L1-RSRP measurement reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send periodic L1-RSRP measurement reports for an active BWP.

The UE shall transmit the periodic L1-RSRP reporting on PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.13.3.2 Semi-Persistent Reporting

Reported L1-RSRP measurements contained in a Semi-Persistent L1-RSRP measurement report shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively. This requirement applies for semi-persistent L1-RSRP reports send on PUSCH or PUCCH.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUSCH, if a DCI request has been received.

The UE shall only send semi-persistent L1-RSRP measurement reports on PUCCH, if an activation command [7] has been received.

The UE shall transmit the semi-persistent L1-RSRP reporting on PUSCH or PUCCH over the air interface according to the periodicity defined in clause 5.2.1.4 in TS 38.214 [26].

9.13.3.3 Aperiodic Reporting

Reported L1-RSRP measurements contained in aperiodic triggered, aperiodic triggered periodic and aperiodic triggered semi-persistent L1-RSRP reports shall meet the requirements in clauses 10.1.19 for FR1 and 10.1.20 for FR2, respectively.

The UE shall only send aperiodic L1-RSRP measurement report if a DCI trigger has been received.

After the UE receives CSI request in DCI, the UE shall transmit the aperiodic L1-RSRP reporting on PUSCH over the air interface at the time specified according to clause 6.1.2.1 in TS 38.214 [26].

9.13.4 L1-RSRP measurement requirements

9.13.4.1 Inter-cell SSB based L1-RSRP Reporting

If a cell with PCI different from serving cell is known according 9.13.2, the UE shall be capable of performing L1-RSRP measurements based on the configured SSB resource for L1-RSRP computation, and the UE physical layer shall be capable of reporting L1-RSRP measured over the measurement period of $T_{L1-RSRP_Measurement_Period_SSB_CDP}$. The requirements specified in this clause are only applicable when

- *highSpeedMeasFlag-r16* is not configured, and
- *highSpeedMeasFlagFR2-r17* is not configured, and
- *highSpeedMeasCA-Scell-r17* is not configured, and
- SSBs of CDP outside SMTCS for L1-RSRP measurement are not overlapped with concurrent gaps.

The value of $T_{L1\text{-RSRP_Measurement_Period_SSB_CDP}}$ is defined in Table 9.13.4.1-1 for FR1, The value of $T_{L1\text{-RSRP_Measurement_Period_SSB_CDP}}$ is defined in Table 9.13.4.1-2 for FR2 when *highSpeedMeasFlagFR2-r17* is not configured, where

- $M=1$ if higher layer parameter *timeRestrictionForChannelMeasurement* is configured, and $M=3$ otherwise
- $N=8$.

For FR1,

- $P = \frac{1}{1 - \frac{T_{SSB_CDP}}{MGRP}}$, when in the monitored cell there are measurement gaps configured for intra-frequency, inter-frequency or inter-RAT measurements, which are overlapping with some but not all occasions of the SSB; and
- $P=1$ when in the monitored cell there are no measurement gaps overlapping with any occasion of the SSB.

For FR2,

- P is $P_{L1_sharing} * P_{\text{sharing factor, CDP}}$, when SSB is not overlapped with measurement gap and SSB is fully overlapped with SMTC period ($T_{SSB_CDP} = T_{SMTCperiod}$), and $T_{SSB_SC} = T_{SMTCperiod}$.
- P is $P_{L1_sharing} * \frac{P_{\text{sharing factor}}}{1 - \frac{T_{SSB_CDP}}{MGRP}}$, when SSB is partially overlapped with measurement gap and SSB is fully overlapped with SMTC occasion ($T_{SSB_CDP} = T_{SMTCperiod}$) and SMTC occasion is partially overlapped with GAP ($T_{SMTCperiod} < MGRP$).
- $P_2 = \frac{1}{1 - \frac{T_{SSB_CDP}}{T_{SMTCperiod}}}$, when SSB is not overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB_CDP} < T_{SMTCperiod}$).
- $P_2 = \frac{1}{1 - \frac{T_{SSB_CDP}}{MGRP} - \frac{T_{SSB_CDP}}{T_{SMTCperiod}}}$, when SSB is partially overlapped with measurement gap and SSB is partially overlapped with SMTC occasion ($T_{SSB_CDP} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with measurement gap and
 - $T_{SMTCperiod} \neq MGRP$ or
 - $T_{SMTCperiod} = MGRP$ and $T_{SSB_CDP} < 0.5 * T_{SMTCperiod}$
- P_2 is $\frac{P_{\text{sharing factor}}}{1 - \frac{T_{SSB_CDP}}{MGRP}}$, when SSB is partially overlapped with GAP and SSB is partially overlapped with SMTC occasion ($T_{SSB_CDP} < T_{SMTCperiod}$) and SMTC occasion is not overlapped with GAP and $T_{SMTCperiod} = MGRP$ and $T_{SSB_CDP} = 0.5 * T_{SMTCperiod}$
- $P_2 = \frac{1}{1 - \frac{T_{SSB_CDP}}{\min(T_{SMTCperiod}, MGRP)}}$, when SSB is partially overlapped with measurement gap ($T_{SSB_CDP} < MGRP$) and SSB is partially overlapped with SMTC occasion ($T_{SSB_CDP} < T_{SMTCperiod}$) and SMTC occasion is partially or fully overlapped with measurement gap.
- If SSB resource from serving cell is configured for L1-RSRP measurements, and P_1 is valid according to 9.5.4.1, and any symbol of the SSBs from serving cell and cell with different PCI are overlapping or adjacent (in time domain)
 - $P = \frac{P_2}{1 - \frac{P_2 * T_{SSB_CDP}}{P_1 * T_{SSB_SC}}}$, if $P_2 * T_{SSB_CDP} < P_1 * T_{SSB_SC}$.
 - $P = P_2$, if $P_2 * T_{SSB_CDP} > P_1 * T_{SSB_SC}$.
 - $P = 2 * P_2$, if $P_1 * T_{SSB_SC} = P_2 * T_{SSB_CDP}$.
- Otherwise, $P = P_2$
- T_{SSB_CDP} = SSB periodicity of the cell with PCI different from serving cell
- $T_{SMTCperiod}$ = the configured SMTC period

- T_{SSB_SC} = ssb-periodicityServingCell of the serving cell
- $P_{\text{sharing factor}} = 1$, if the SSB configured for L1-RSRP measurement outside measurement gap is
 - not overlapped with the SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol before each consecutive SSB symbols indicated by *SSB-ToMeasure* and 1 data symbol after each consecutive SSB symbols indicated by *SSB-ToMeasure*, given that *SSB-ToMeasure* is configured, where the *SSB-ToMeasure* is the union set of *SSB-ToMeasure* from all the configured measurement objects merged on the same serving carrier, and,
 - not overlapped with the RSSI symbols indicated by *ss-RSSI-Measurement* and 1 data symbol before each RSSI symbol indicated by *ss-RSSI-Measurement* and 1 data symbol after each RSSI symbol indicated by *ss-RSSI-Measurement*, given that *ss-RSSI-Measurement* is configured,
- $P_{\text{sharing factor}} = 3$, otherwise.
- $P_{L1_sharing} = 2$, if SSB resource from serving cell is configured for L1-RSRP measurements, and $P_{\text{sharing factor}}$ is used in 9.5.4.1, and any symbol of the SSBs from serving cell and cell with different PCI are overlapping or adjacent (in time domain). $P_{L1_sharing} = 1$, otherwise.

If the high layer in TS 38.331 [2] signaling of *smtc2* is configured, $T_{\text{SMTCPeiod}}$ corresponds to the value of higher layer parameter *smtc2*; Otherwise $T_{\text{SMTCPeiod}}$ corresponds to the value of higher layer parameter *smtc1*. $T_{\text{SMTCPeiod}}$ is the shortest SMTC period among all CCs in the same FR2 band, provided the SMTC offset of all CCs in FR2 have the same offset.

Longer evaluation period would be expected if the combination of SSB, SMTC occasion and measurement gap configurations does not meet previous conditions.

For either an FR1 or FR2 cell with PCI different from serving cell, longer evaluation period would be expected during the period $T_{\text{identify_CGI}}$ when the UE is requested to decode an NR CGI.

For either an FR1 or FR2 cell with PCI different from serving cell, longer L1 RSRP measurement period would be expected during the period $T_{\text{identify_CGI,E-UTRAN}}$ when the UE is requested to decode an LTE CGI.

Table 9.13.4.1-1: Inter-cell L1-RSRP measurement period $T_{L1\text{-RSRP_Measurement_Period_SSB_CDP}}$ for known cells with different PCIs in FR1

Configuration	$T_{L1\text{-RSRP_Measurement_Period_SSB_CDP}}$ (ms)
non-DRX	$\max(T_{\text{Report}}, \text{ceil}(M \cdot P) \cdot T_{\text{SSB_CDP}})$
DRX cycle $\leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(K \cdot M \cdot P) \cdot \max(T_{\text{DRX}}, T_{\text{SSB_CDP}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(M \cdot P) \cdot T_{\text{DRX}}$
Note 1: $T_{\text{SSB_CDP}}$ is the periodicity of the SSB-Index configured for inter-cell L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	
Note 2: $K = 1.5$.	

Table 9.13.4.1-2: Inter-cell L1-RSRP measurement period $T_{L1\text{-RSRP_Measurement_Period_SSB_CDP}}$ for known cells with different PCIs in FR2

Configuration	$T_{L1\text{-RSRP_Measurement_Period_SSB_CDP}}$ (ms)
non-DRX	$\max(T_{\text{Report}}, \text{ceil}(M \cdot P \cdot N) \cdot T_{\text{SSB_CDP}})$
DRX cycle $\leq 320\text{ms}$	$\max(T_{\text{Report}}, \text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot \max(T_{\text{DRX}}, T_{\text{SSB_CDP}}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(1.5 \cdot M \cdot P \cdot N) \cdot T_{\text{DRX}}$
Note: $T_{\text{SSB_CDP}}$ is the periodicity of the SSB-Index configured for inter-cell L1-RSRP measurement. T_{DRX} is the DRX cycle length. T_{Report} is configured periodicity for reporting.	

9.13.5 Measurement restriction for L1-RSRP measurement

The UE is required to be capable of measuring SSB for L1-RSRP without measurement gaps. The UE is required to perform the SSB measurements with measurement restrictions as described in the following clauses.

Unless explicitly stated, the SSB to be measured for L1-RSRP measurement is transmitted from cell(s) with PCI different from serving cell(s).

9.13.5.1 Measurement restriction for SSB based L1-RSRP

For FR1,

when the SSB for L1-RSRP measurement is in the same OFDM symbol as SSB transmitted from serving cell(s) for RLM, BFD, CBD or L1-RSRP measurement,

- UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;

when the SSB for L1-RSRP measurement is in the same OFDM symbol as CSI-RS transmitted from serving cell(s) for RLM, BFD, CBD or L1-RSRP measurement,

- If SSB and CSI-RS have same SCS, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
- If SSB and CSI-RS have different SCS,
 - If UE supports *simultaneousRxDataSSB-DiffNumerology*, UE shall be able to measure the SSB for L1-RSRP measurement without any restriction;
 - If UE does not support *simultaneousRxDataSSB-DiffNumerology*, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

For FR2,

when the SSB for L1-RSRP measurement on one CC is in the same OFDM symbol as SSB transmitted from serving cell(s) for RLM, BFD, or CBD measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both the two SSBs. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

when the SSB for L1-RSRP measurement on one CC is in the same OFDM symbol as SSB for L1-RSRP measurement on the different CCs in the same band, UE is required to measure one of but not both the two SSBs. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

when the SSB for L1-RSRP measurement on one CC is in the same OFDM symbol as CSI-RS transmitted from serving cell(s) for RLM, BFD, CBD or L1-RSRP measurement on the same CC or different CCs in the same band, UE is required to measure one of but not both SSB for L1-RSRP measurement and CSI-RS. Longer measurement period for SSB based L1-RSRP measurement is expected, and no requirements are defined.

For FR2, if the network configures same or mixed numerology between SSB for L1-RSRP measurement on one FR2 band and CSI-RS for RLM, BFD, CBD, L1-RSRP or L1-SINR measurement on the other FR2 band, UE shall be able to perform the related SSB based measurements in one band without any measurement restrictions in the other band, provided that UE is capable of independent beam management on this FR2 band pair.

9.13.6 Scheduling availability of UE during L1-RSRP measurement

Scheduling availability restrictions described in the following clauses apply when UE is performing L1-RSRP measurement on cell(s) with PCI different from serving cell, and UE is receiving PDCCH/PDSCH from serving cell and/or cell(s) with different PCI.

9.13.6.1 Scheduling availability of UE performing L1-RSRP measurement with a same subcarrier spacing as PDSCH/PDCCH on FR1

There are no scheduling restrictions due to L1-RSRP measurement performed on SSB as RS for L1-RSRP measurement with the same SCS as PDSCH/PDCCH in FR1.

9.13.6.2 Scheduling availability of UE performing L1-RSRP measurement with a different subcarrier spacing than PDSCH/PDCCH on FR1

For UEs which support *simultaneousRxDataSSB-DiffNumerology* [14] there are no restrictions on scheduling availability due to L1-RSRP measurement based on SSB as RS for L1-RSRP measurement. For UEs which do not support *simultaneousRxDataSSB-DiffNumerology* [14] the following restrictions apply due to L1-RSRP measurement based on SSB configured for L1-RSRP measurement.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on symbols corresponding to the SSB indexes configured for L1-RSRP measurement.

When intra-band carrier aggregation in FR1 is configured, the scheduling restrictions apply to cell(s) in the same band on the symbols that fully or partially overlap with restricted symbols. When inter-band carrier aggregation within FR1 is configured, there are no scheduling restrictions on FR1 cells configured in other bands than the bands in which the cell where L1-RSRP measurement is performed is configured.

9.13.6.3 Scheduling availability of UE performing L1-RSRP measurement on FR2

The following scheduling restriction applies due to L1-RSRP measurement.

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on symbols corresponding to the SSB indexes configured for L1-RSRP measurement.

When intra-band carrier aggregation in FR2 is performed, the scheduling restrictions is performed apply to cell(s) in the band on the symbols that fully or partially overlap with restricted symbols.

When inter-band carrier aggregation in FR2 is performed, there are no scheduling restrictions on FR2 cells in the bands due to L1-RSRP measurement performed on FR2 cell(s) in different band(s), provided that UE is capable of independent beam management on this FR2 band pair. Additionally, there is no scheduling restriction if the UE is configured with different numerology between SSB on one FR2 band and data on the other FR2 band provided the UE is configured for IBM operation for the band pair.

If following conditions are met,

- UE has been notified about system information update through paging,
- The gap between UE's reception of PDCCH that UE monitors in the Type 2-PDCCH CSS set and that notifies system information update, and the PDCCH that UE monitors in the Type0-PDCCH CSS set, is greater than 2 slots,

For the SSB and CORESET for RMSI scheduling multiplexing patterns 3, UE shall receive the PDCCH that UE monitors in the Type0-PDCCH CSS set, and the corresponding PDSCH, on SSB symbols to be measured for L1-RSRP measurement; and

For the SSB and CORESET for RMSI scheduling multiplexing patterns 2, UE shall receive PDSCH that corresponds to the PDCCH that UE monitors in the Type0-PDCCH CSS set, on SSB symbols to be measured for L1-RSRP measurement.

9.13.6.4 Scheduling availability of UE performing L1-RSRP measurement on FR1 or FR2 in case of FR1-FR2 inter-band CA

There are no scheduling restrictions on FR1 cell(s) due to L1-RSRP measurement performed on FR2 cell(s).

There are no scheduling restrictions on FR2 cell(s) due to L1-RSRP measurement performed on FR1 cell(s).

9.13.6.5 Scheduling availability of UE performing L1-RSRP measurement in TDD bands on FR1

When UE performs L1-RSRP measurement on cell with different PCI from serving cell in a TDD band, the following restrictions apply due to L1-RSRP measurement

- The UE is not expected to transmit PUCCH/PUSCH/SRS on symbols corresponding to the SSB indexes configured for L1-RSRP measurement, where the transmission of PUCCH/PUSCH/SRS may be on serving cell(s) and cell(s) with PCI different from serving cell(s), and restricted symbols may partially or fully overlap with UL symbols

10 Measurement Performance requirements

10.1 NR measurements

10.1.1 Introduction

The requirements in clause 10.1 apply as follows:

- intra-frequency requirements apply for PCell measurements in SA, NR-DC, or NE-DC operation mode,
- intra-frequency requirements apply for PSCell measurements in NR-DC or EN-DC operation mode,
- intra-frequency requirements apply for SCell measurements in SA operation mode with NR CA or any MR-DC operation mode with NR CA,
- inter-frequency requirements apply for non-serving cell measurements on NR carrier frequencies.
- inter-frequency requirements apply for measurements from one cell on a frequency compared to the measurement from another cell on a different frequency.

In the requirements of clause 10.1, the exceptions for side conditions apply as follows:

- for the UE capable of CA but not configured with any SCell, the applicable exceptions for side conditions are specified in Annex B, clause B.3.2.1 for UE supporting CA in FR1, and clause B.3.2.3 for UE supporting CA in FR2, respectively;
- for the UE capable of CA and configured with at least one SCell, the applicable exceptions for side conditions are specified in Annex B, clause B.3.2.2 for UE configured with CA in FR1, and clause B.3.2.4 for UE supporting CA in FR2 respectively;
- for the UE capable of SUL but not configured with SUL, the applicable exceptions for side conditions are specified in Annex B, clause B.3.4.1 for UE supporting SUL in FR1;
- for the UE capable of SUL and configured with at least one SUL, the applicable exceptions for side conditions are specified in Annex B, clause B.3.4.2 for UE configured with SUL in FR1.

10.1.2 Intra-frequency RSRP accuracy requirements for FR1

10.1.2.1 Intra-frequency SS-RSRP accuracy requirements

10.1.2.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on the same frequency as that of the serving cell in FR1. The accuracy requirements in this clause are also applicable when *highSpeedMeasFlag-r16* or *highSpeedMeasCA-Scell-r17* is configured.

The accuracy requirements in Table 10.1.2.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 10.1.2.1.1-1: SS-RSRP Intra frequency absolute accuracy in FR1

Accuracy		Conditions		
Normal condition	Extreme condition	SSB Es/Iot	Io ^{Note 1} range	
			NR operating band groups Note 2	Minimum Io
				Maximum Io

dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±4.5	±9	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±8	±11	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	-70	-50

NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.2.1.2 Relative SS-RSRP Accuracy

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell compared to the SS-RSRP measured from another cell on the same frequency, or between any two SS-RSRP levels measured on the same cell in FR1. The accuracy requirements in this clause are also applicable when *highSpeedMeasFlag-r16* or *highSpeedMeasCA-Scell-r17* is configured.

The accuracy requirements in Table 10.1.2.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 10.1.2.1.2-1: SS-RSRP Intra frequency relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$ Note 2	I_0 Note 1 range				
			NR operating band groups Note 4	Minimum I_0		Maximum I_0	
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±2	±3	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50

			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±3	±3	≥-6	Note 3	Note 3	Note 3	N/A	Note 3

NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB $\bar{E}_s/I_0$ is the minimum SSB $\bar{E}_s/I_0$ of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.2.2 Void

10.1.2.3 Intra-frequency CSI-RSRP accuracy requirements

10.1.2.3.1 Absolute CSI-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRP in this clause apply to a cell where the CSI-RS resources to be measured have the same center frequency as the CSI-RS resources indicated for measurement in the serving cell in FR1.

The accuracy requirements in Table 10.1.2.3.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each associated SSB.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.2.3.1-1.- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

Table 10.1.2.3.1-1: CSI-RSRP Intra frequency absolute accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Es/lot	Io ^{Note 1} range					
			NR operating band groups ^{Note 2}	Minimum Io			Maximum Io	
				dBm / SCS _{CSI-RS}				
dB	dB	dB		SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz	dBm/BW _{Channel}	dBm/BW _{Channel}
±4.5	±9	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70

± 8	± 11	≥ -6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	N/A	-70	-50
NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.								

10.1.2.3.2 Relative CSI-RSRP Accuracy

The relative accuracy of CSI-RSRP is defined as the CSI-RSRP measured from one cell compared to the CSI-RSRP measured from another cell on the same center frequency, or between any two CSI-RSRP levels measured on the same cell in FR1.

The accuracy requirements in Table 10.1.2.3.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each associated SSB.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.2.3.2-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

Table 10.1.2.3.2-1: CSI-RSRP Intra frequency relative accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS $\hat{E}_s/I_0$ Note 2	NR operating band groups Note 4	I_0 Note 1 range				
				Minimum I_0			Maximum I_0	
dB	dB	dB		dBm / SCS_{CSI-RS}			dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS_{CSI-RS} = 15 kHz	SCS_{CSI-RS} = 30 kHz	SCS_{CSI-RS} = 60 kHz		
± 2	± 3	≥ -3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
± 3	± 3	≥ -6	Note 3	Note 3	Note 3	Note 3	N/A	Note 3
NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter CSI-RS $\hat{E}_s/I_0$ is the minimum CSI-RS $\hat{E}_s/I_0$ of the pair of cells to which the requirement applies. NOTE 3: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.								

10.1.2B Intra-frequency RSRP accuracy requirements for FR1 for CA/DC Idle Mode Measurements

10.1.2B.1 Intra-frequency SS-RSRP accuracy requirements

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC_INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of SS-RSRP.

10.1.2B.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to the serving cell in FR1.

The accuracy requirements in Table 10.1.2B.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.1.2 for a corresponding Band for each relevant SSB.

Table 10.1.2B.1.1-1: SS-RSRP Intra frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	Io ^{Note 1} range				
			NR operating band groups Note 2	Minimum Io		dBm/BW _{Channel}	Maximum Io
				dBm / SCS _{SSB}	dBm/BW _{Channel}		
dB	dB	dB		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±6	±10.5	≥-4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±9.5	±12.5	≥-4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.

NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.2C Intra-frequency RSRP accuracy requirements for FR1 SAN

10.1.2C.1 Intra-frequency SS-RSRP accuracy requirements

10.1.2C.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 10.1.2C.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-5 [40] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.17 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.2C.1.1-1: SS-RSRP Intra frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	I_o ^{Note 1} range				
			NR operating band groups ^{Note 2}	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
$\pm[4.5]$	$\pm[9]$	≥ -6	NR_FDD_SAB_FR1_A	-121	-118	N/A	-70
$\pm[8]$	$\pm[11]$	≥ -6	NR_FDD_SAB_FR1_A	N/A	N/A	-70	-50

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2A.

10.1.2C.1.2 Relative SS-RSRP Accuracy

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell compared to the SS-RSRP measured from another cell on the same frequency, or between any two SS-RSRP levels measured on the same cell in FR1.

The accuracy requirements in Table 10.1.2C.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-5 [40] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.17 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.2C.1.2-1: SS-RSRP Intra frequency relative accuracy in FR1

Accuracy		Conditions			
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$ ^{Note 2}	I_o ^{Note 1} range		
			NR operating band groups ^{Note 4}	Minimum I_o	Maximum I_o

dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±[2]	±[3]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
±[3]	±[3]	≥-6	Note 3	Note 3	Note 3	N/A	Note 3

NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB $\hat{E}_s/I_0$ is the minimum SSB $\hat{E}_s/I_0$ of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2A.

10.1.3 Intra-frequency RSRP accuracy requirements for FR2

10.1.3.1 Intra-frequency SS-RSRP accuracy requirements

10.1.3.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on the same frequency as that of the serving cell in FR2.

The accuracy requirements in Table 10.1.3.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.3.1.1-1: SS-RSRP Intra frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB $\hat{E}_s/I_0$	I_0 Note 2 range		
			Minimum I_0		Maximum I_0
			dBm / SCS _{SSB} Note 1		dBm/BW _{Channel}
dB	dB	dB	SCS _{SSB} = 120kHz	SCS _{SSB} = 240kHz	dBm/BW _{Channel}
±6	±9	≥-6	Same value as SSB _{RP} in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		N/A
±8	±11		N/A		-70
					-50

Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2: I_0 specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the SSB $\hat{E}_s/I_0$ and related parameters may need to be adjusted to ensure $\hat{E}_s/I_0$ at UE baseband is above the value defined in this table.

10.1.3.1.2 Relative SS-RSRP Accuracy

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell compared to the SS-RSRP measured from another cell on the same frequency, or between any two SS-RSRP levels measured on the same cell in FR2.

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.3.1.2-1: SS-RSRP Intra frequency relative accuracy in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	SSB Ês/lot	Io ^{Note 2} range		dBm/BW _{Channel}	
dB	dB		dB	Minimum Io		
				dBm / SCS _{SSB} ^{Note 1}		
			SCS _{SSB} = 120kHz	SCS _{SSB} = 240kHz		
±6	±9	≥-6	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		-50	
Note 1:	Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
Note 2:	Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
Note 3:	In the test cases, the SSB Ês/lot and related parameters may need to be adjusted to ensure Ês/lot at UE baseband is above the value defined in this table.					
Note 4:	The parameter SSB Ês/lot is the minimum SSB Ês/lot of the pair of cells to which the requirement applies.					

10.1.3.2 Void

10.1.3.3 Intra-frequency CSI-RSRP accuracy requirements

10.1.3.3.1 Absolute CSI-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRP in this clause apply to a cell where the CSI-RS resources to be measured have the same center frequency as the CSI-RS resources indicated for measurement in the serving cell in FR2.

The accuracy requirements in Table 10.1.3.3.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each associated SSB(s).
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.3.3.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.3.3.1-1: CSI-RSRP Intra frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS $\hat{E}_s/\text{lot}$	I_o ^{Note 2} range		
			Minimum I_o		Maximum I_o
dB	dB	dB	$\text{dBm} / SCS_{\text{CSI-RS}}$ ^{Note 1}		$\text{dBm}/BW_{\text{Channel}}$
			$SCS_{\text{CSI-RS}} = 60\text{kHz}$	$SCS_{\text{CSI-RS}} = 120\text{kHz}$	
± 6	± 9	≥ -6	Same value as CSI-RS_RP in Table B.2.8-2, according to UE Power class, operating band and angle of arrival		N/A
± 8	± 11		N/A		-70
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the CSI-RS $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.					

10.1.3.3.2 Relative CSI-RSRP Accuracy

The relative accuracy of CSI-RSRP is defined as the CSI-RSRP measured from one cell compared to the CSI-RSRP measured from another cell on the same center frequency, or between any two CSI-RSRP levels measured on the same cell in FR2.

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each associated SSB(s).
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.3.3.2-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.3.3.2-1: CSI-RSRP Intra frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/lot	I _o ^{Note 2} range		
			Minimum I _o		Maximum I _o
			dBm / SCS _{CSI-RS} ^{Note 1}		
dB	dB	dB	SCS _{CSI-RS} = 60kHz	SCS _{CSI-RS} = 120kHz	dBm/BW _{Channel}
			Same value as CSI-RS_RP in Table B.2.8-2, according to UE Power class, operating band and angle of arrival		
±6	±9	≥-6			-50
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
Note 2: I _o specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					

- Note 3: In the test cases, the CSI-RS $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.
- Note 4: The parameter CSI-RS $\hat{E}_s/\text{lot}$ is the minimum CSI-RS $\hat{E}_s/\text{lot}$ of the pair of cells to which the requirement applies.

10.1.3B Intra-frequency RSRP accuracy requirements for FR2 for CA/DC Idle Mode Measurements

10.1.3B.1 Intra-frequency SS-RSRP accuracy requirements

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC_INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of SS-RSRP.

10.1.3B.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to the serving cell in FR2.

The accuracy requirements in Table 10.1.3B.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.1.2 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.3B.1.1-1: SS-RSRP Intra frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	I_o ^{Note 2} range		
			Minimum I_o		Maximum I_o
dB	dB	dB	dBm / SCS_{SSB} ^{Note 1}		dBm/BW _{Channel}
			$SCS_{SSB} = 120\text{kHz}$	$SCS_{SSB} = 240\text{kHz}$	
± 7.5	± 10.5	≥ -4	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		N/A
± 9.5	± 12.5		N/A		-70
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
Note 2: I_o specified at the Reference point and assumed to have constant EPRE across the bandwidth.					
Note 3: In the test cases, the SSB $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.					

10.1.4 Inter-frequency RSRP accuracy requirements for FR1

10.1.4.1 Inter-frequency SS-RSRP accuracy requirements

10.1.4.1.1 Absolute Accuracy of SS-RSRP in FR1

The requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell. The accuracy requirements in this clause are also applicable when *highSpeedMeasInterFreq-r17* is configured.

The accuracy requirements in Table 10.1.4.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.

Table 10.1.4.1.1-1: SS-RSRP Inter frequency Absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Es/lot Note 2	Io ^{Note 1} range				
			NR operating band groups ^{Note 3}	Minimum Io		Maximum Io	
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±4.5	±9	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±8	±11	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: Void NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1.4.1.2 Relative Accuracy of SS-RSRP in FR1

The relative accuracy of SS-RSRP in inter frequency case is defined as the RSRP measured from one cell on a frequency in FR1 compared to the RSRP measured from another cell on a different frequency in FR1. The accuracy requirements in this clause are also applicable when *highSpeedMeasInterFreq-r17* is configured.

The accuracy requirements in Table 10.1.4.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|\text{SSB_RP1}_{\text{dBm}} - \text{SSB_RP2}_{\text{dBm}}| \leq 27 \text{ dB}$
- $|\text{Channel 1_Io} - \text{Channel 2_Io}| \leq 20 \text{ dB}$

Table 10.1.4.1.2-1: SS-RSRP Inter frequency relative accuracy in FR1

Accuracy			Conditions				
Normal condition	Extreme condition	SSB Es/lot Note 2	Io ^{Note 1} range				
			NR operating band groups Note 3	Minimum Io		Maximum Io	
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±4.5	±6	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The parameter SSB Es/lot is the minimum SSB Es/lot of the pair of cells to which the requirement applies.							
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1.4.2 Void

10.1.4.3 Inter-frequency CSI-RSRP accuracy requirements

10.1.4.3.1 Absolute Accuracy of CSI-RSRP in FR1

The requirements for absolute accuracy of CSI-RSRP in this clause apply to a cell where the CSI-RS resources to be measured have the different center frequency as the CSI-RS resources indicated for measurement in the serving cell in FR1.

The accuracy requirements in Table 10.1.4.3.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.4.3.1-1.

- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 10.1.4.3.1-1: CSI-RSRP Inter frequency Absolute accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/lot	Io ^{Note 1} range					
			NR operating band groups ^{Note 2}	Minimum Io			Maximum Io	
dB	dB	dB		dBm / SCS _{CSI-RS}			dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz		
±4.5	±9	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
	NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70		
±8	±11	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.								
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.								

10.1.4.3.2 Relative Accuracy of CS-RSRP in FR1

The relative accuracy of CSI-RSRP in inter frequency case is defined as the CSI-RSRP measured from one cell on a frequency in FR1 compared to the CSI-RSRP measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 10.1.4.3.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.4.3.2-1.

- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
- Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.
- $|\text{CSI_RP1}_{\text{dBm}} - \text{CSI_RP2}_{\text{dBm}}| \leq 27 \text{ dB}$
- $|\text{Channel 1}_{\text{Io}} - \text{Channel 2}_{\text{Io}}| \leq 20 \text{ dB}$

Table 10.1.4.3.2-1: CSI-RSRP Inter frequency relative accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS $\hat{E}_s/\text{lot}$ Note 2	Io ^{Note 1} range					
			NR operating band groups Note 4	Minimum Io			Maximum Io	
dB	dB	dB		dBm / $\text{SCS}_{\text{CSI-RS}}$			dBm/ $\text{BW}_{\text{Channel}}$	dBm/ $\text{BW}_{\text{Channel}}$
				$\text{SCS}_{\text{CSI-RS}} = 15$ kHz	$\text{SCS}_{\text{CSI-RS}} = 30$ kHz	$\text{SCS}_{\text{CSI-RS}} = 60$ kHz		
± 4.5	± 6	≥ -6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.								
NOTE 2: The parameter CSI-RS $\hat{E}_s/\text{lot}$ is the minimum CSI-RS $\hat{E}_s/\text{lot}$ of the pair of CSI-RS resources to which the requirement applies.								
NOTE 3: Void								
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.								

10.1.4B Inter-frequency RSRP accuracy requirements for FR1 for CA/DC Idle Mode Measurements

10.1.4B.1 Inter-frequency SS-RSRP accuracy requirements

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC_INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of SS-RSRP.

10.1.4B.1.1 Absolute Accuracy of SS-RSRP in FR1

The requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.4B.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

- Conditions for inter-frequency measurements are fulfilled according to Annex B.1.3 for a corresponding Band for each relevant SSB.

Table 10.1.4B.1.1-1: SS-RSRP Inter frequency Absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$ Note 2	I_o ^{Note 1} range				
			NR operating band groups ^{Note 3}	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				$SCS_{SSB} = 15$ kHz	$SCS_{SSB} = 30$ kHz		
± 6	± 10.5	≥ -4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
± 9.5	± 12.5	≥ -4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	-70	-50
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.							
NOTE 2: Void							
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1.4C Inter-frequency RSRP accuracy requirements for FR1 SAN

10.1.4C.1 Inter-frequency SS-RSRP accuracy requirements

10.1.4C.1.1 Absolute Accuracy of SS-RSRP in FR1

The requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.4C.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-5 [40] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.18 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.4C.1.1-1: SS-RSRP Inter frequency Absolute accuracy in FR1

Accuracy	Conditions
----------	------------

Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$ Note 2	I_o Note 1 range				
			NR operating band groups Note 3	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ $BW_{Channel}$	dBm/ $BW_{Channel}$
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
$\pm[4.5]$	$\pm[9]$	≥ -6	NR_FDD_SAB_FR1_A	-121	-118	N/A	-70
$\pm[8]$	$\pm[11]$	≥ -6	NR_FDD_SAB_FR1_A	N/A	N/A	-70	-50
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.							
NOTE 2: Void							
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2A.							

10.1.4C.1.2 Relative Accuracy of SS-RSRP in FR1

The relative accuracy of SS-RSRP in inter frequency case is defined as the RSRP measured from one cell on a frequency in FR1 compared to the RSRP measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 10.1.4C.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-5 [40] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.18 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27 \text{ dB}$
- $|Channel\ 1_I_o - Channel\ 2_I_o| \leq 20 \text{ dB}$
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.4C.1.2-1: SS-RSRP Inter frequency relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$ Note 2	I_o Note 1 range				
			NR operating band groups Note 3	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ $BW_{Channel}$	dBm/ $BW_{Channel}$
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
$\pm[4.5]$	$\pm[6]$	≥ -6	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The parameter SSB $\hat{E}_s/I_{ot}$ is the minimum SSB $\hat{E}_s/I_{ot}$ of the pair of cells to which the requirement applies.							
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2A.							

10.1.5 Inter-frequency RSRP accuracy requirements for FR2

10.1.5.1 Inter-frequency SS-RSRP accuracy requirements

10.1.5.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency in FR2 that is on a different frequency than the serving cell.

The accuracy requirements in Table 10.1.5.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.5.1.1-1: SS-RSRP Inter frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/lot	Io ^{Note 2} range		
			Minimum Io		Maximum Io
			dBm / SCS _{SSB} ^{Note 1}		dBm/BW _{Channel}
dB	dB	dB	SCS _{SSB} = 120kHz	SCS _{SSB} = 240kHz	dBm/BW _{Channel}
±6	±9	≥-4	Same value as SSB_RP in Table B.2.3-2, according to UE Power class, operating band and angle of arrival		-70
±8	±11		N/A		-50
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
Note 3: In the test cases, the SSB Ês/lot and related parameters may need to be adjusted to ensure Ês/lot at UE baseband is above the value defined in this table.					

10.1.5.1.2 Relative SS-RSRP Accuracy

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell on a frequency in FR2 compared to the SS-RSRP measured from another cell on another frequency in FR2.

The accuracy requirements in Table 10.1.5.1.2-1 are valid under the following conditions:

- Conditions defined in 38.101-2 [19] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27\text{dB}$
- $|Channel\ 1_I_o - Channel\ 2_I_o| \leq 20\text{ dB}$
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.5.1.2-1: SS-RSRP Inter frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/lot	I _o ^{Note 2} range		
			Minimum I _o		Maximum I _o dBm/BW _{Channel}
			dBm / SCS _{SSB} ^{Note 1}		
dB	dB	dB	SCS _{SSB} = 120kHz	SCS _{SSB} = 240kHz	
±6	±9	≥-4	Same value as SSB_RP in Table B.2.3-2, according to UE Power class, operating band and angle of arrival		-50
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					

Note 2:	I_0 specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3:	In the test cases, the SSB $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.
Note 4:	The parameter SSB $\hat{E}_s/\text{lot}$ is the minimum SSB $\hat{E}_s/\text{lot}$ of the pair of cells to which the requirement applies.

10.1.5.2 Void

10.1.5.3 Inter-frequency CSI-RSRP accuracy requirements

10.1.5.3.1 Absolute CSI-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRP in this clause apply to a cell on a frequency in FR2 where the CSI-RS resources to be measured have the different center frequency as the CSI-RS resources indicated for measurement in the serving cell.

The accuracy requirements in Table 10.1.5.3.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.5.3.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.5.3.1-1: CSI-RSRP Inter frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS $\hat{E}_s/\text{lot}$	I_o ^{Note 2} range		
			Minimum I_o		Maximum I_o
			$\text{dBm} / SCS_{\text{CSI-RS}}$ ^{Note 1}		$\text{dBm}/BW_{\text{Channel}}$
dB	dB	dB	$SCS_{\text{CSI-RS}} = 60\text{kHz}$	$SCS_{\text{CSI-RS}} = 120\text{kHz}$	$\text{dBm}/BW_{\text{Channel}}$
± 6	± 9	≥ -4	Same value as CSI_RP in Table B.2.9-2, according to UE Power class, operating band and angle of arrival		-70
± 8	± 11		N/A		-50
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
Note 2: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
Note 3: In the test cases, the CSI-RS $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.					

10.1.5.3.2 Relative CSI-RSRP Accuracy

The relative accuracy of CSI-RSRP in inter frequency case is defined as the CSI-RSRP measured from one cell on a frequency in FR2 compared to the CSI-RSRP measured from another cell on another frequency in FR2.

The accuracy requirements in Table 10.1.5.3.2-1 are valid under the following conditions:

- Conditions defined in 38.101-2 [19] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS to be measured.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3. The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.5.3.2-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

- $|\text{CSI_RP1}_{\text{dBm}} - \text{CSI_RP2}_{\text{dBm}}| \leq 27\text{dB}$
- $|\text{Channel 1_Io} - \text{Channel 2_Io}| \leq 20\text{ dB}$
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.5.3.2-1: CSI-RSRP Inter frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/lot	Io ^{Note 2} range		
			Minimum Io		Maximum Io
			dBm / SCS _{CSI-RS} ^{Note 1}		
dB	dB	dB	SCS _{CSI-RS} = 60kHz	SCS _{CSI-RS} = 120kHz	dBm/BW _{Channel}
±6	±9	≥-4	Same value as CSI_RP in Table B.2.9-2, according to UE Power class, operating band and angle of arrival		-50
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
Note 3: In the test cases, the CSI-RS Ês/lot and related parameters may need to be adjusted to ensure Ês/lot at UE baseband is above the value defined in this table.					
Note 4: The parameter CSI-RS Ês/lot is the minimum CSI-RS Ês/lot of the pair of cells to which the requirement applies.					

10.1.5B Inter-frequency RSRP accuracy requirements for FR2 for CA/DC Idle Mode Measurements

10.1.5B.1 Inter-frequency SS-RSRP accuracy requirements

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC_INACTIVE

- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of SS-RSRP.

10.1.5B.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency in FR2 that is on a different frequency than the serving cell.

The accuracy requirements in Table 10.1.5B.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.1.3 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.5B.1.1-1: SS-RSRP Inter frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/lot	Io ^{Note 2} range		
			Minimum Io		Maximum Io
dB	dB	dB	dBm / SCS _{SSB} ^{Note 1}		dBm/BW _{Channel}
			SCS _{SSB} = 120kHz	SCS _{SSB} = 240kHz	
±7.5	±10.5	≥-4	Same value as SSB_RP in Table B.2.3-2, according to UE Power class, operating band and angle of arrival		N/A
±9.5	±12.5		N/A		-70
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
Note 3: In the test cases, the SSB Ês/lot and related parameters may need to be adjusted to ensure Ês/lot at UE baseband is above the value defined in this table.					

10.1.6 RSRP Measurement Report Mapping

The reporting range of SS-RSRP and CSI-RSRP for L3 reporting is defined from -156 dBm to -31 dBm with 1 dB resolution. The reporting range of SS-RSRP and CSI-RSRP for L1 reporting is defined from -140 to -44 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 10.1.6.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

The reporting range of differential SS-RSRP and CSI-RSRP for L1 reporting is defined from 0 dB to -30 dB with 2 dB resolution.

The mapping of measured quantity is defined in Table 10.1.6.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 10.1.6.1-1: SS-RSRP and CSI-RSRP measurement report mapping

Reported value	Measured quantity value (L3 SS-RSRP) and CSI-RSRP	Measured quantity value (L1 SS-RSRP and CSI-RSRP)	Unit
RSRP_0	SS-RSRP < -156	Not valid	dBm
RSRP_1	-156 ≤ SS-RSRP < -155	Not valid	dBm

RSRP_2	$-155 \leq \text{SS-RSRP} < -154$	Not valid	dBm
RSRP_3	$-154 \leq \text{SS-RSRP} < -153$	Not valid	dBm
RSRP_4	$-153 \leq \text{SS-RSRP} < -152$	Not valid	dBm
RSRP_5	$-152 \leq \text{SS-RSRP} < -151$	Not valid	dBm
RSRP_6	$-151 \leq \text{SS-RSRP} < -150$	Not valid	dBm
RSRP_7	$-150 \leq \text{SS-RSRP} < -149$	Not valid	dBm
RSRP_8	$-149 \leq \text{SS-RSRP} < -148$	Not valid	dBm
RSRP_9	$-148 \leq \text{SS-RSRP} < -147$	Not valid	dBm
RSRP_10	$-147 \leq \text{SS-RSRP} < -146$	Not valid	dBm
RSRP_11	$-146 \leq \text{SS-RSRP} < -145$	Not valid	dBm
RSRP_12	$-145 \leq \text{SS-RSRP} < -144$	Not valid	dBm
RSRP_13	$-144 \leq \text{SS-RSRP} < -143$	Not valid	dBm
RSRP_14	$-143 \leq \text{SS-RSRP} < -142$	Not valid	dBm
RSRP_15	$-142 \leq \text{SS-RSRP} < -141$	Not valid	dBm
RSRP_16	$-141 \leq \text{SS-RSRP} < -140$	$\text{RSRP} < -140$	dBm
RSRP_17	$-140 \leq \text{SS-RSRP} < -139$	$-140 \leq \text{RSRP} < -139$	dBm
RSRP_18	$-139 \leq \text{SS-RSRP} < -138$	$-139 \leq \text{RSRP} < -138$	dBm
...	...		...
RSRP_111	$-46 \leq \text{SS-RSRP} < -45$	$-46 \leq \text{RSRP} < -45$	dBm
RSRP_112	$-45 \leq \text{SS-RSRP} < -44$	$-45 \leq \text{RSRP} < -44$	dBm
RSRP_113	$-44 \leq \text{SS-RSRP} < -43$	$-44 \leq \text{RSRP}$	dBm
RSRP_114	$-43 \leq \text{SS-RSRP} < -42$	Not valid	dBm
RSRP_115	$-42 \leq \text{SS-RSRP} < -41$	Not valid	dBm
RSRP_116	$-41 \leq \text{SS-RSRP} < -40$	Not valid	dBm
RSRP_117	$-40 \leq \text{SS-RSRP} < -39$	Not valid	dBm
RSRP_118	$-39 \leq \text{SS-RSRP} < -38$	Not valid	dBm
RSRP_119	$-38 \leq \text{SS-RSRP} < -37$	Not valid	dBm
RSRP_120	$-37 \leq \text{SS-RSRP} < -36$	Not valid	dBm
RSRP_121	$-36 \leq \text{SS-RSRP} < -35$	Not valid	dBm
RSRP_122	$-35 \leq \text{SS-RSRP} < -34$	Not valid	dBm
RSRP_123	$-34 \leq \text{SS-RSRP} < -33$	Not valid	dBm
RSRP_124	$-33 \leq \text{SS-RSRP} < -32$	Not valid	dBm
RSRP_125	$-32 \leq \text{SS-RSRP} < -31$	Not valid	dBm
RSRP_126	$-31 \leq \text{SS-RSRP}$	Not valid	dBm
RSRP_127 (Note)	Infinity	Infinity	dBm
Note: The value of RSRP_127 is applicable for RSRP threshold configured by the network as defined in TS 38.331 [2], but not for the purpose of measurement reporting.			

Table 10.1.6.1-2: Differential SS-RSRP and CSI-RSRP measurement (for L1 reporting) report mapping

Reported value	Measured quantity value (difference in measured RSRP from strongest RSRP)	Unit
DIFFRSRP_0	$0 \geq \Delta \text{RSRP} > -2$	dB
DIFFRSRP_1	$-2 \geq \Delta \text{RSRP} > -4$	dB
DIFFRSRP_2	$-4 \geq \Delta \text{RSRP} > -6$	dB

DIFFRSRP_3	$-6 \geq \Delta \text{RSRP} > -8$	dB
DIFFRSRP_4	$-8 \geq \Delta \text{RSRP} > -10$	dB
DIFFRSRP_5	$-10 \geq \Delta \text{RSRP} > -12$	dB
DIFFRSRP_6	$-12 \geq \Delta \text{RSRP} > -14$	dB
DIFFRSRP_7	$-14 \geq \Delta \text{RSRP} > -16$	dB
DIFFRSRP_8	$-16 \geq \Delta \text{RSRP} > -18$	dB
DIFFRSRP_9	$-18 \geq \Delta \text{RSRP} > -20$	dB
DIFFRSRP_10	$-20 \geq \Delta \text{RSRP} > -22$	dB
DIFFRSRP_11	$-22 \geq \Delta \text{RSRP} > -24$	dB
DIFFRSRP_12	$-24 \geq \Delta \text{RSRP} > -26$	dB
DIFFRSRP_13	$-26 \geq \Delta \text{RSRP} > -28$	dB
DIFFRSRP_14	$-28 \geq \Delta \text{RSRP} > -30$	dB
DIFFRSRP_15	$-30 \geq \Delta \text{RSRP}$	dB

10.1.7 Intra-frequency RSRQ accuracy requirements for FR1

10.1.7.1 Intra-frequency SS-RSRQ accuracy requirements in FR1

10.1.7.1.1 Absolute SS-RSRQ Accuracy in FR1

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on the same frequency as that of the serving cell in FR1. The accuracy requirements in this clause are also applicable when *highSpeedMeasFlag-r16* or *highSpeedMeasCA-Scell-r17* is configured.

The accuracy requirements in Table 10.1.7.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.

Table 10.1.7.1.1-1: SS-RSRQ Intra frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Es/lot	Io ^{Note 1} range				
			NR operating band groups ^{Note 3}	Minimum Io		Maximum Io	
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±2.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.							

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.

NOTE 2: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.

NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.7.2 Intra-frequency CSI-RSRQ accuracy requirements

10.1.7.2.1 Absolute CSI-RSRQ Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRQ in this clause apply to the intra-frequency measurement defined in 9.10.2.1 in FR1.

The accuracy requirements in Table 10.1.7.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for associated SSB.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
 - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.7.2.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

Table 10.1.7.2.1-1: CSI-RSRQ Intra frequency absolute accuracy in FR1

Accuracy		Conditions							
Normal condition	Extreme condition	CSI-RS Es/Iot	Io ^{Note 1} range						
			NR operating band groups ^{Note 3}	Minimum Io			Maximum Io		
dB	dB	dB		dBm / SCS _{CSI-RS}			dBm/BW _{Channel}	dBm/BW _{Channel}	
				SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz			
±2.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50	
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50	
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50	
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50	
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50	
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50	
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50	
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50	
+3.5	+4	>-6	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.

NOTE 2: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.

NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.7B Intra-frequency RSRQ accuracy requirements for FR1 for CA/DC Idle Mode Measurements

10.1.7B.1 Intra-frequency SS-RSRQ accuracy requirements in FR1

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC_INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of SS-RSRQ.

10.1.7B.1.1 Absolute SS-RSRQ Accuracy in FR1

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to the serving cell in FR1.

The accuracy requirements in Table 10.1.7B.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.1.2 for a corresponding Band for each relevant SSB.

Table 10.1.7B.1.1-1: SS-RSRQ Intra frequency absolute accuracy in FR1

Accuracy			Conditions				
Normal condition	Extreme condition	SSB Es/lot	Io ^{Note 1} range				
			NR operating band groups ^{Note 3}	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±4	±5.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±5	±5.5	≥-4	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1.7C Intra-frequency RSRQ accuracy requirements for FR1 SAN

10.1.7C.1 Intra-frequency SS-RSRQ accuracy requirements in FR1

10.1.7C.1.1 Absolute SS-RSRQ Accuracy in FR1

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 10.1.7C.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-5 [40] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.17 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.7C.1.1-1: SS-RSRQ Intra frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	I_o ^{Note 1} range				
			NR operating band groups ^{Note 3}	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
$\pm[2.5]$	$\pm[4]$	≥ -3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
$\pm[3.5]$	$\pm[4]$	≥ -6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
 NOTE 2: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
 NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2A.

10.1.8 Intra-frequency RSRQ accuracy requirements for FR2

10.1.8.1 Intra-frequency SS-RSRQ accuracy requirements in FR2

10.1.8.1.1 Absolute SS-RSRQ Accuracy in FR2

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on the same frequency as that of the serving cell in FR2.

The accuracy requirements in Table 10.1.8.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.8.1.1-1: SS-RSRQ Intra frequency absolute accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	I_o ^{Note 2} range	
			Minimum I_o	Maximum I_o
dB	dB	dB	dBm / SCS_{SSB} ^{Note 1}	dBm/ BW_{Channel}

			SCS _{SSB} = 120kHz	SCS _{SSB} = 240kHz	
±2.5	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		-50
±3.5	±4	≥-6			
Note 1:	Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.				
Note 2:	I ₀ specified at the Reference point, and assumed to have constant EPRE across the bandwidth.				
Note 3:	In the test cases, the SSB Ê _s /I ₀ and related parameters may need to be adjusted to ensure Ê _s /I ₀ at UE baseband is above the value defined in this table.				

10.1.8.2 Intra-frequency CSI-RSRQ accuracy requirements

10.1.8.2.1 Absolute CSI-RSRQ Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRQ in this clause apply to the intra-frequency measurement defined in 9.10.2.1 in FR2.

The accuracy requirements in Table 10.1.8.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band for each relevant SSB.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
 - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.8.2.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for intra-frequency measurement is serving cell timing.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.8.2.1-1: CSI-RSRQ Intra frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS $\hat{E}_s/I_0$	I_0 ^{Note 2} range		
			Minimum I_0		Maximum I_0
			dBm / SCS_{CSI-RS} ^{Note 1}		
dB	dB	dB			dBm/BW _{Channel}
			$SCS_{CSI-RS} = 60\text{kHz}$	$SCS_{CSI-RS} = 120\text{kHz}$	
± 2.5	± 4	≥ -3	Same value as CSI_RP in Table B.2.8-2, according to UE Power class, operating band and angle of arrival		-50
± 3.5	± 4	≥ -6			
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
Note 2: I_0 specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
Note 3: In the test cases, the CSI-RS $\hat{E}_s/I_0$ and related parameters may need to be adjusted to ensure $\hat{E}_s/I_0$ at UE baseband is above the value defined in this table.					

10.1.8B Intra-frequency RSRQ accuracy requirements for FR2 for CA/DC Idle Mode Measurements

10.1.8B.1 Intra-frequency SS-RSRQ accuracy requirements in FR2

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC_INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of SS-RSRQ.

10.1.8B.1.1 Absolute SS-RSRQ Accuracy in FR2

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to the serving cell in FR2.

The accuracy requirements in Table 10.1.8B.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.1.2 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.8B.1.1-1: SS-RSRQ Intra frequency absolute accuracy in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	I_o ^{Note 2} range		$\text{dBm}/\text{BW}_{\text{Channel}}$	
			Minimum I_o			Maximum I_o
			$\text{dBm} / \text{SCS}_{\text{SSB}}$ ^{Note 1}			
dB	dB	dB	$\text{SCS}_{\text{SSB}} = 120\text{kHz}$	$\text{SCS}_{\text{SSB}} = 240\text{kHz}$		
± 4	± 5.5	≥ -3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		-50	
± 5	± 5.5	≥ -4				
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.						
Note 2: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth.						
Note 3: In the test cases, the SSB $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.						

10.1.9 Inter-frequency RSRQ accuracy requirements for FR1

10.1.9.1 Inter-frequency SS-RSRQ accuracy requirements in FR1

10.1.9.1.1 Absolute Accuracy of SS-RSRQ in FR1

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell. The accuracy requirements in this clause are also applicable when *highSpeedMeasInterFreq-r17* is configured.

The accuracy requirements in Table 10.1.9.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.

Table 10.1.9.1.1-1: SS-RSRQ Inter frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/lot	Io ^{Note 1} range				
			NR operating band groups ^{Note 3}	Minimum Io		Maximum Io	
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±2.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.9.1.2 Relative Accuracy of SS-RSRQ in FR1

The relative accuracy of SS-RSRQ in inter frequency case is defined as the RSRQ measured from one cell on a frequency in FR1 compared to the RSRP measured from another cell on a different frequency in FR1. The accuracy requirements in this clause are also applicable when *highSpeedMeasInterFreq-r17* is configured.

The accuracy requirements in Table 10.1.9.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- $|\text{SSB_RP1}_{\text{dBm}} - \text{SSB_RP2}_{\text{dBm}}| \leq 27 \text{ dB}$
- $|\text{Channel 1_Io} - \text{Channel 2_Io}| \leq 20 \text{ dB}$

Table 10.1.9.1.2-1: SS-RSRQ Inter frequency relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/lot ^{Note 2}	Io ^{Note 1} range				
			NR operating band groups ^{Note 4}	Minimum Io		Maximum Io	
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
			NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50

± 3	± 4	≥ 3	NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
± 4	± 4	≥ 6	Note 3	Note 3	Note 3	Note 3	Note 3
NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB $\hat{E}_s/I_0$ is the minimum SSB $\hat{E}_s/I_0$ of the pair of cells to which the requirement applies. NOTE 3: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1.9.2 Inter-frequency CSI-RSRQ accuracy requirements

10.1.9.2.1 Absolute CSI-RSRQ Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRQ in this clause apply to the inter-frequency measurement defined in 9.10.3.1 in FR1.

The accuracy requirements in Table 10.1.9.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
 - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.9.2.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 10.1.9.2.1-1: CSI-RSRQ Inter frequency absolute accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Es/Iot	Io ^{Note 1} range					
			NR operating band groups ^{Note 3}	Minimum Io			Maximum Io	
dB	dB	dB		dBm / SCS _{CSI-RS}			dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz		
±2.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50

			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.								
NOTE 2: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.								
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.								

10.1.9.2.2 Relative CSI-RSRQ Accuracy

The relative accuracy of CSI-RSRQ is defined as the CSI-RSRQ measured from one cell compared to the CSI-RSRQ measured from another cell with the same center frequency, or between any two CSI-RSRQ levels measured on the same cell in FR1.

The accuracy requirements in Table 10.1.9.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for the associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
 - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.9.2.2-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 10.1.9.2.2-1: CSI-RSRQ Inter frequency relative accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS $\hat{E}_s/I_0$ Note 2	I_0 Note 1 range					
			NR operating band groups Note 4	Minimum I_0			$\text{dBm/BW}_{\text{Channel}}$	Maximum I_0
				$\text{SCS}_{\text{CSI-RS}} = 15 \text{ kHz}$	$\text{SCS}_{\text{CSI-RS}} = 30 \text{ kHz}$	$\text{SCS}_{\text{CSI-RS}} = 60 \text{ kHz}$		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
±4	±4	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3	Note 3
NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.								

NOTE 2: The parameter CSI-RS $\hat{E}_s/\text{lot}$ is the minimum CSI-RS $\hat{E}_s/\text{lot}$ of the pair of cells to which the requirement applies.
 NOTE 3: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
 NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.9B Inter-frequency RSRQ accuracy requirements for FR1 for CA/DC Idle Mode Measurements

10.1.9B.1 Inter-frequency SS-RSRQ accuracy requirements in FR1

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC_INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of SS-RSRQ.

10.1.9B.1.1 Absolute Accuracy of SS-RSRQ in FR1

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.9B.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.1.3 for a corresponding Band for each relevant SSB.

Table 10.1.9B.1.1-1: SS-RSRQ Inter frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/lot	Io ^{Note 1} range				
			NR operating band groups ^{Note 3}	Minimum Io		dBm/BW _{Channel}	Maximum Io
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±4	±5.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±5	±5.5	≥-4	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1.9C Inter-frequency RSRQ accuracy requirements for FR1 SAN

10.1.9C.1 Inter-frequency SS-RSRQ accuracy requirements in FR1

10.1.9C.1.1 Absolute Accuracy of SS-RSRQ in FR1

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.9C.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-5 [40] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.18 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.9C.1.1-1: SS-RSRQ Inter frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\tilde{E}_s/\text{lot}$	I_o ^{Note 1} range				
			NR operating band groups ^{Note 3}	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
$\pm[2.5]$	$\pm[4]$	≥ -3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
$\pm[3.5]$	$\pm[4]$	≥ -6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
 NOTE 2: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
 NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2A.

10.1.9C.1.2 Relative Accuracy of SS-RSRQ in FR1

The relative accuracy of SS-RSRQ in inter frequency case is defined as the RSRQ measured from one cell on a frequency in FR1 compared to the RSRP measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 10.1.9C.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-5 [40] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.18 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{\text{dBm}} - SSB_RP2_{\text{dBm}}| \leq 27 \text{ dB}$
- $|Channel\ 1_I_o - Channel\ 2_I_o| \leq 20 \text{ dB}$
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.9C.1.2-1: SS-RSRQ Inter frequency relative accuracy in FR1

Accuracy		Conditions				
Normal condition	Extreme condition	SSB Es/lot Note 2	Io ^{Note 1} range			
			NR operating band groups ^{Note 4}	Minimum Io		Maximum Io
dB	dB	dB		dBm / SCS _{SSB}	dBm/BW _{Channel}	dBm/BW _{Channel}

				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±[3]	±[4]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
±[4]	±[4]	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3
NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB $\hat{E}_s/\text{lot}$ is the minimum SSB $\hat{E}_s/\text{lot}$ of the pair of cells to which the requirement applies. NOTE 3: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2A.							

10.1.10 Inter-frequency RSRQ accuracy requirements for FR2

10.1.10.1 Inter-frequency SS-RSRQ accuracy requirements in FR2

10.1.10.1.1 Absolute Accuracy of SS-RSRQ in FR2

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency in FR2 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.10.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.10.1.1-1: SS-RSRQ Inter frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	I_0 ^{Note 2} range		
			Minimum I_0		Maximum I_0 dBm/BW _{Channel}
			dBm / SCS _{SSB} ^{Note 1}		
dB	dB	dB	SCS _{SSB} =		
			120kHz	240kHz	
±2.5	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		-50
±3.5	±4	≥-4			
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
Note 2: I_0 specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
Note 3: In the test cases, the SSB $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.					

10.1.10.1.2 Relative Accuracy of SS-RSRQ in FR2

The relative accuracy of SS-RSRQ in inter frequency case is defined as the RSRQ measured from one cell on a frequency in FR2 compared to the RSRP measured from another cell on a different frequency in FR2.

The accuracy requirements in Table 10.1.10.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for each relevant SSB.

- $|\text{SSB_RP1}_{\text{dBm}} - \text{SSB_RP2}_{\text{dBm}}| \leq 27 \text{ dB}$
- $|\text{Channel 1_Io} - \text{Channel 2_Io}| \leq 20 \text{ dB}$
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.10.1.2-1: SS-RSRQ Inter frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/lot	Io ^{Note 2} range		
dB	dB		Minimum Io		Maximum Io dBm/BW _{Channel}
			dBm / SCS _{SSB} ^{Note 1}		
			SCS _{SSB} = 120kHz	SCS _{SSB} = 240kHz	
±3	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		
±4	±4	≥-4			
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
Note 3: The parameter SSB Ês/lot is the minimum SSB Ês/lot of the pair of cells to which the requirement applies.					
Note 4: In the test cases, the SSB Ês/lot and related parameters may need to be adjusted to ensure Ês/lot at UE baseband is above the value defined in this table.					

10.1.10.2 Inter-frequency CSI-RSRQ accuracy requirements

10.1.10.2.1 Absolute CSI-RSRQ Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RSRQ in this clause apply the inter-frequency measurement defined in 9.10.3.1 in FR2.

The accuracy requirements in Table 10.1.10.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
 - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.10.2.1-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 10.1.10.2.1-1: CSI-RSRQ Inter frequency absolute accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	CSI-RS $\hat{\text{E}}\text{s/lot}$	Io ^{Note 2} range	
			Minimum Io	
			Maximum Io	

dB	dB	dB	dBm / SCS _{CSI-RS} ^{Note 1}		dBm/BW _{Channel}
			SCS _{CSI-RS} = 60kHz	SCS _{CSI-RS} = 120kHz	
±2.5	±4	≥-3	Same value as CSI_RP in Table B.2.9-2, according to UE Power class, operating band and angle of arrival		-50
±3.5	±4	≥-4			
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival. Note 2: I ₀ specified at the Reference point, and assumed to have constant EPRE across the bandwidth. Note 3: In the test cases, the CSI-RS Ê _s /I _{ot} and related parameters may need to be adjusted to ensure Ê _s /I _{ot} at UE baseband is above the value defined in this table.					

10.1.10.2.2 Relative CSI-RSRQ Accuracy

The relative accuracy of CSI-RSRQ is defined as the CSI-RSRQ measured from one cell compared to the CSI-RSRQ measured from another cell with the same center frequency, or between any two CSI-RSRQ levels measured on the same cell in FR2.

The accuracy requirements in Table 10.1.10.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band for the associated SSB.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
 - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.10.2.2-1.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for one layer for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

Table 10.1.10.2.2-1: CSI-RSRQ Inter frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS $\hat{E}_s/I_{ot}$	I_0 ^{Note 2} range		
			Minimum I_0		Maximum I_0 $dBm/BW_{Channel}$
			dBm / SCS_{CSI-RS} ^{Note 1}		
dB	dB	dB	$SCS_{CSI-RS} = 60kHz$	$SCS_{CSI-RS} = 120kHz$	
± 3	± 4	≥ -3	Same value as CSI_RP in Table B.2.9-2, according to UE Power class, operating band and angle of arrival		-50
± 4	± 4	≥ -4			
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
Note 2: I_0 specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
Note 3: The parameter CSI-RS $\hat{E}_s/I_{ot}$ is the minimum CSI-RS $\hat{E}_s/I_{ot}$ of the pair of cells to which the requirement applies.					
Note 4: In the test cases, the CSI-RS $\hat{E}_s/I_{ot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/I_{ot}$ at UE baseband is above the value defined in this table.					

10.1.10B Inter-frequency RSRQ accuracy requirements for FR2 for CA/DC Idle Mode Measurements

10.1.10B.1 Inter-frequency SS-RSRQ accuracy requirements in FR2

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC_INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of SS-RSRQ.

10.1.10B.1.1 Absolute Accuracy of SS-RSRQ in FR2

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency in FR2 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.10B.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.1.3 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.10B.1.1-1: SS-RSRQ Inter frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	I_o ^{Note 2} range		
dB	dB	dB	Minimum I_o		Maximum I_o
			dBm / SCS_{SSB} ^{Note 1}		
			$SCS_{SSB} = 120\text{kHz}$	$SCS_{SSB} = 240\text{kHz}$	
± 4	± 5.5	≥ -3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		-50
± 5	± 5.5	≥ -4			
Note 1:	Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.				
Note 2:	I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth.				
Note 3:	In the test cases, the SSB $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.				

10.1.11 RSRQ report mapping

10.1.11.1 SS-RSRQ and CSI-RSRQ measurement report mapping

The reporting range of SS-RSRQ and CSI-RSRQ measurement is defined from -43 dB to 20 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 10.1.11.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 10.1.11.1-1: SS-RSRQ and CSI-RSRQ measurement report mapping

Reported value	Measured quantity value	Unit
----------------	-------------------------	------

SS-RSRQ_0	SS-RSRQ<-43	dB
SS-RSRQ_1	-43≤ SS-RSRQ<-42.5	dB
SS-RSRQ_2	-42.5≤ SS-RSRQ<-42	dB
SS-RSRQ_3	-42≤ SS-RSRQ<-41.5	dB
SS-RSRQ_4	-41.5≤ SS-RSRQ<-41	dB
..	..	...
SS-RSRQ_122	17.5≤ SS-RSRQ<18	dB
SS-RSRQ_123	18≤ SS-RSRQ<18.5	dB
SS-RSRQ_124	18.5≤ SS-RSRQ<19	dB
SS-RSRQ_125	19≤ SS-RSRQ<19.5	dB
SS-RSRQ_126	19.5≤ SS-RSRQ<20	dB
SS-RSRQ_127	20 ≤ SS-RSRQ	dB

10.1.12 Intra-frequency SINR accuracy requirements for FR1

10.1.12.1 Intra-frequency SS-SINR accuracy requirements in FR1

10.1.12.1.1 Absolute SS-SINR Accuracy in FR1

Unless otherwise specified, the requirements for absolute accuracy of SS-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 10.1.12.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band.

Table 10.1.12.1.1-1: SS-SINR Intra frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$ Note 3	I_o ^{Note 1} range				
			NR operating band groups ^{Note 4}	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
± 3.0	± 4	≥ -3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
± 3.5	± 4	≥ -6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							
NOTE 3: The requirements apply for SSB $\hat{E}_s/\text{lot} \leq 25$ dB under non-HST scenarios.							
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.							
NOTE 5: The requirements apply for SSB $\hat{E}_s/\text{lot} \leq 5$ dB with SCS 15kHz or 30kHz under NR high speed scenarios.							

10.1.12.2 Intra-frequency CSI-SINR accuracy requirements in FR1

10.1.12.2.1 Absolute CSI-SINR Accuracy in FR1

Unless otherwise specified, the requirements for absolute accuracy of CSI-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 10.1.12.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
- Note: The reference measurement timing for intra-frequency measurement is serving cell timing.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.12.2.1-1.

Table 10.1.12.2.1-1: CSI-SINR Intra frequency absolute accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/lot	Io ^{Note 1} range					
			NR operating band groups	Minimum Io			Maximum Io	
				dBm / SCS			dBm/BW Channel	dBm/BW Channel
dB	dB	dB	SCS (kHz)					
				15	30	60		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	N/A	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.								
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.								
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.								
NOTE 4: The requirements apply for CSI-RS Ês/lot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.								

10.1.12C Intra-frequency SINR accuracy requirements for FR1 SAN

10.1.12C.1 Intra-frequency SS-SINR accuracy requirements in FR1

10.1.12C.1.1 Absolute SS-SINR Accuracy in FR1

Unless otherwise specified, the requirements for absolute accuracy of SS-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR1.

The accuracy requirements in Table 10.1.12C.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-5 [40] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.17 for a corresponding Band.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.12C.1.1-1: SS-SINR Intra frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$ Note 3	I_o ^{Note 1} range				
			NR operating band groups Note 4	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
$\pm[3]$	$\pm[4]$	≥ -3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
$\pm[3,5]$	$\pm[4]$	≥ -6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							
NOTE 3: The requirements apply for SSB $\hat{E}_s/\text{lot} \leq 25 \text{ dB}$ under non-HST scenarios.							
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2A.							
NOTE 5: The requirements apply for SSB $\hat{E}_s/\text{lot} \leq 5 \text{ dB}$ with SCS 15kHz or 30kHz under NR high speed scenarios.							

10.1.13 Intra-frequency SINR accuracy requirements for FR2

10.1.13.1 Intra-frequency SS-SINR accuracy requirements in FR2

10.1.13.1.1 Absolute SS-SINR Accuracy in FR2

Unless otherwise specified, the requirements for absolute accuracy of SS-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR2.

The accuracy requirements in Table 10.1.13.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.2 for a corresponding Band.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.13.1.1-1: SS-SINR Intra frequency absolute accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	I_o ^{Note 2} range	
			Minimum I_o	Maximum I_o
dB	dB	dB	dBm / SCS_{SSB} ^{Note 1}	dBm/ BW_{Channel}

			SCS _{SSB} = 120kHz	SCS _{SSB} = 240kHz	
±3	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		-50
±3.5	±4	≥-6			
Note 1:	Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.				
Note 2:	I ₀ specified at the Reference point, and assumed to have constant EPRE across the bandwidth.				
Note 3:	In the test cases, the SSB Ês/lot and related parameters may need to be adjusted to ensure Ês/lot at UE baseband is above the value defined in this table.				
Note 4:	The requirements apply for SSB Ês/lot ≤ 25 dB.				

10.1.13.2 Intra-frequency CSI-SINR accuracy requirements in FR2

10.1.13.2.1 Absolute CSI-SINR Accuracy in FR2

Unless otherwise specified, the requirements for absolute accuracy of CSI-SINR in this clause apply to a cell on the same frequency as that of the serving cell in FR2.

The accuracy requirements in Table 10.1.13.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
 - Note: The reference measurement timing for intra-frequency measurement is serving cell timing.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
 - The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.13.2.1-1.

Table 10.1.13.2.1-1: CSI-SINR Intra frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/lot	I ₀ ^{Note 2} range		
			Minimum I ₀		Maximum I ₀ dBm/BW _{Channel}
			dBm / SCS _{CSI-RS} ^{Note 1}		
dB	dB	dB	SCS _{CSI-RS} = 60kHz	SCS _{CSI-RS} = 120kHz	
±3	±4	≥-3	Same value as CSI_RP in Table B.2.8-2, according to UE Power class, operating band and angle of arrival		-50
±3.5	±4	≥-6			
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
Note 2: I ₀ specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
Note 3: In the test cases, the CSI-RS Ês/lot and related parameters may need to be adjusted to ensure Ês/lot at UE baseband is above the value defined in this table.					
Note 4: The requirements apply for CSI-RS Ês/lot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.					

10.1.14 Inter-frequency SINR accuracy requirements for FR1

10.1.14.1 Inter-frequency SS-SINR accuracy requirements in FR1

10.1.14.1.1 Absolute Accuracy of SS-SINR in FR1

The requirements for absolute accuracy of SS-SINR in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.14.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.

Table 10.1.14.1.1-1: SS-SINR Inter frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$ Note 3	I_o ^{Note 1} range				
			NR operating band groups Note 4	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
± 3.0	± 4	≥ 3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
± 3.5	± 4	≥ 6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: The requirements apply for SSB $\hat{E}_s/\text{lot} \leq 25 \text{ dB}$. NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2. NOTE 5: The requirements apply for SSB $\hat{E}_s/\text{lot} \leq [5] \text{ dB}$ with SCS 15kHz or 30kHz under NR high speed scenarios.							

10.1.14.1.2 Relative Accuracy of SS-SINR in FR1

The relative accuracy of SS-SINR in inter frequency case is defined as the SS-SINR measured from one cell on a frequency in FR1 compared to the SS-SINR measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 10.1.14.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27 \text{ dB}$
- $|Channel\ 1_I_o - Channel\ 2_I_o| \leq 20 \text{ dB}$

Table 10.1.14.1.2-1: SS-SINR Inter frequency relative accuracy in FR1

Accuracy	Conditions
----------	------------

Normal condition	Extreme condition	SSB Ês/lot Note 2,4	Io ^{Note 1} range				
			NR operating band groups ^{Note 5}	Minimum Io		Maximum Io	
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 120 kHz	SCS _{SSB} = 240 kHz		
±3.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±4	±4	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The parameter SSB Ês/lot is the minimum SSB Ês/lot of the pair of cells to which the requirement applies.							
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							
NOTE 4: The requirements apply for SSB Ês/lot ≤ [25] dB.							
NOTE 5: NR operating band groups in FR1 are as defined in clause 3.5.2.							
NOTE 6: The requirements apply for SSB Ês/lot ≤ [5] dB with SCS 15kHz or 30kHz under NR high speed scenarios.							

10.1.14.2 Inter-frequency CSI-SINR accuracy requirements in FR1

10.1.14.2.1 Absolute Accuracy of CSI-SINR in FR1

The requirements for absolute accuracy of CSI-SINR in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.14.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band.
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.
- Note: The reference measurement timing for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.14.2.1-1.

Table 10.1.14.2.1-1: CSI-SINR Inter frequency absolute accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/lot	Io ^{Note 1} range					
			NR operating band groups	Minimum Io			Maximum Io	
dB	dB	dB		dBm / SCS			dBm/BW Channel	dBm/BW Channel
				SCS (kHz)				
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A	15	30	60	N/A	-70
				-121	-118	-115		

			NR SDL FR1 A					
			NR FDD FR1 B	-120.5	-117.5	-114.5	N/A	-70
			NR TDD FR1 C	-120	-117	-114	N/A	-70
			NR FDD FR1 D, NR TDD FR1 D	-119.5	-116.5	-113.5	N/A	-70
			NR FDD FR1 E, NR TDD FR1 E	-119	-116	-113	N/A	-70
			NR FDD FR1 F	-118.5	-115.5	-112.5	N/A	-70
			NR FDD FR1 G	-118	-115	-112	N/A	-70
			NR FDD FR1 H	-117.5	-114.5	-111.5	N/A	-70
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	N/A	Note 2
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2. NOTE 4: The requirements apply for CSI-RS $\hat{E}_s/I_{ot} \leq X$ dB. $X=15$ if timing offset between the reference measurement timing and the target CSI-RS is no larger than $0.5 \cdot CP$, and $X=4$ if timing offset between the reference measurement timing and the target CSI-RS is larger than $0.5 \cdot CP$ but no larger than CP .								

10.1.14.2.2 Relative Accuracy of CSI-SINR in FR1

The relative accuracy of CSI-SINR in inter frequency case is defined as the CSI-SINR measured from one cell on a frequency in FR1 compared to the CSI-SINR measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 10.1.14.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band.
- $|CSI_RP1_{dBm} - CSI_RP2_{dBm}| \leq 27$ dB
- $|Channel\ 1_{I_o} - Channel\ 2_{I_o}| \leq 20$ dB
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.14.2.2-1.

Table 10.1.14.2.2-1: CSI-SINR Inter frequency relative accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Es/lot Note 3	Io ^{Note 1} range					
			NR operating band groups	Minimum Io			Maximum Io	
				dBm / SCS				
dB	dB	dB		SCS (kHz)			dBm/BW Channel	dBm/BW Channel
				15	30	60		
±3.5	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70

			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
± 4	± 4	≥ -6	Note 2	Note 2	Note 2	Note 2	N/A	Note 2
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.								
NOTE 2: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.								
NOTE 3: The parameter CSI-RS $\hat{E}_s/I_{ot}$ is the minimum CSI-RS $\hat{E}_s/I_{ot}$ of the pair of cells to which the requirement applies.								
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.								
NOTE 5: The requirements apply for CSI-RS $\hat{E}_s/I_{ot} \leq X$ dB. $X=15$ if timing offset between the reference measurement timing and the target CSI-RS is no larger than $0.5 \cdot CP$, and $X=4$ if timing offset between the reference measurement timing and the target CSI-RS is larger than $0.5 \cdot CP$ but no larger than CP .								

10.1.14C Inter-frequency SINR accuracy requirements for FR1 SAN

10.1.14C.1 Inter-frequency SS-SINR accuracy requirements in FR1

10.1.14C.1.1 Absolute Accuracy of SS-SINR in FR1

The requirements for absolute accuracy of SS-SINR in this clause apply to a cell on a frequency in FR1 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.14C.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-5 [40] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.18 for a corresponding Band.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.14C.1.1-1: SS-SINR Inter frequency absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$ Note 3	I_o Note 1 range				
			NR operating band groups Note 4	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ $BW_{Channel}$	dBm/ $BW_{Channel}$
				$SCS_{SSB} = 15$ kHz	$SCS_{SSB} = 30$ kHz		
$\pm[3]$	$\pm[4]$	≥ -3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
$\pm[3.5]$	$\pm[4]$	≥ -6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							
NOTE 3: The requirements apply for SSB $\hat{E}_s/I_{ot} \leq 25$ dB.							
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2A.							

10.1.14C.1.2 Relative Accuracy of SS-SINR in FR1

The relative accuracy of SS-SINR in inter frequency case is defined as the SS-SINR measured from one cell on a frequency in FR1 compared to the SS-SINR measured from another cell on a different frequency in FR1.

The accuracy requirements in Table 10.1.14C.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-5 [40] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.18 for a corresponding Band.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- $|Channel\ 1_I_o - Channel\ 2_I_o| \leq 20$ dB

- Valid information for the SAN serving the target cell has been provided.

Table 10.1.14C.1.2-1: SS-SINR Inter frequency relative accuracy in FR1

Accuracy			Conditions				
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$ Note 2,4	I_o ^{Note 1} range				
			NR operating band groups Note 5	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}
				$SCS_{SSB} = 120 \text{ kHz}$	$SCS_{SSB} = 240 \text{ kHz}$		
$\pm[3.5]$	$\pm[4]$	≥ -3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
$\pm[4]$	$\pm[4]$	≥ -6	Note 3	Note 3	Note 3	Note 3	Note 3
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The parameter SSB $\hat{E}_s/\text{lot}$ is the minimum SSB $\hat{E}_s/\text{lot}$ of the pair of cells to which the requirement applies.							
NOTE 3: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							
NOTE 4: The requirements apply for SSB $\hat{E}_s/\text{lot} \leq [25]$ dB.							
NOTE 5: NR operating band groups in FR1 are as defined in clause 3.5.2A.							

10.1.15 Inter-frequency SINR accuracy requirements for FR2

10.1.15.1 Inter-frequency SS-SINR accuracy requirements in FR2

10.1.15.1.1 Absolute Accuracy of SS-SINR in FR2

The requirements for absolute accuracy of SS-SINR in this clause apply to a cell on a frequency in FR2 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.15.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.15.1.1-1: SS-SINR Inter frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	I_o Note 2 range		
			Minimum I_o		Maximum I_o
dB	dB	dB	dBm / SCS_{SSB} Note 1		dBm/ BW_{Channel}
			$SCS_{SSB} = 120\text{kHz}$	$SCS_{SSB} = 240\text{kHz}$	
± 3	± 4	≥ -3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		-50
± 3.5	± 4	≥ -4			

Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
Note 2: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
Note 3: In the test cases, the SSB $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.
Note 4: The requirements apply for SSB $\hat{E}_s/\text{lot} \leq 25$ dB.

10.1.15.1.2 Relative Accuracy of SS-SINR in FR2

The relative accuracy of SS-SINR in inter frequency case is defined as the SS-SINR measured from one cell on a frequency in FR2 compared to the SS-SINR measured from another cell on a different frequency in FR2.

The accuracy requirements in Table 10.1.15.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.3 for a corresponding Band.
- $|\text{SSB_RP1}_{\text{dBm}} - \text{SSB_RP2}_{\text{dBm}}| \leq 27 \text{ dB}$
- $|\text{Channel 1_Io} - \text{Channel 2_Io}| \leq 20 \text{ dB}$
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.15.1.2-1: SS-SINR Inter frequency relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB Ês/lot	Io ^{Note 2} range		
			Minimum Io		Maximum Io
			dBm / SCS _{SSB} ^{Note 1}		
dB	dB	dB	SCS _{SSB} =		
			120kHz	240kHz	
±3.5	±4	≥-3	Same value as SSB_RP in Table B.2.2-2, according to UE Power class, operating band and angle of arrival		
±4	±4	≥-6			
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
Note 2: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
Note 3: The parameter SSB Ês/lot is the minimum SSB Ês/lot of the pair of cells to which the requirement applies.					
Note 4: In the test cases, the SSB Ês/lot and related parameters may need to be adjusted to ensure Ês/lot at UE baseband is above the value defined in this table.					
Note 5: The requirements apply for SSB Ês/lot ≤ 25 dB.					

10.1.15.2 Inter-frequency CSI-SINR accuracy requirements in FR2

10.1.15.2.1 Absolute Accuracy of CSI-SINR in FR2

The requirements for absolute accuracy of CSI-SINR in this clause apply to a cell on a frequency in FR2 that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.15.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.15.2.1-1.

Table 10.1.15.2.1-1: CSI-SINR Inter frequency absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS $\hat{E}_s/\text{lot}$	I_o ^{Note 2} range		
dB	dB	dB	Minimum I_o		Maximum I_o dBm/BW _{Channel}
			dBm / $SCS_{\text{CSI-RS}}$ ^{Note 1}		
			$SCS_{\text{CSI-RS}} = 60\text{kHz}$	$SCS_{\text{CSI-RS}} = 120\text{kHz}$	
± 3	± 4	≥ -3	Same value as CSI_RP in Table B.2.9-2, according to UE Power class, operating band and angle of arrival		-50
3.5	± 4	≥ -4			
Note 1: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
Note 2: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
Note 3: In the test cases, the CSI-RS $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.					
Note 4: The requirements apply for CSI-RS $\hat{E}_s/\text{lot} \leq X\text{dB}$. $X=15$ if timing offset between the reference measurement timing and the target CSI-RS is no larger than $0.5 \cdot \text{CP}$, and $X=4$ if timing offset between the reference measurement timing and the target CSI-RS is larger than $0.5 \cdot \text{CP}$ but no larger than CP.					

10.1.15.2.2 Relative Accuracy of CSI-SINR in FR2

The relative accuracy of CSI-SINR in inter frequency case is defined as the CSI-SINR measured from one cell on a frequency in FR2 compared to the CSI-SINR measured from another cell on a different frequency in FR2.

The accuracy requirements in Table 10.1.15.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.y for a corresponding Band.
- $|\text{CSI_RP1}_{\text{dBm}} - \text{CSI_RP2}_{\text{dBm}}| \leq 27 \text{ dB}$
- $|\text{Channel 1}_{I_o} - \text{Channel 2}_{I_o}| \leq 20 \text{ dB}$
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- The timing offset between the reference measurement timing and the target CSI-RS in one layer is no larger than CP.

Note: The reference measurement timing for inter-frequency measurement is up to UE implementation and shall be based on the timing of one of the target cells.

- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.15.2.2-1.

Table 10.1.15.2.2-1: CSI-SINR Inter frequency relative accuracy in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	CSI-RS $\hat{E}_s/\text{lot}$	I_o ^{Note 2} range	
dB	dB	dB	Minimum I_o	
			dBm / $SCS_{\text{CSI-RS}}$ ^{Note 1}	
			$SCS_{\text{CSI-RS}} = 60\text{kHz}$	$SCS_{\text{CSI-RS}} = 120\text{kHz}$
± 3	± 4	≥ -3	Same value as CSI_RP in Table B.2.9-2, according to UE Power class, operating band and angle of arrival	
3.5	± 4	≥ -4		

			SCS _{CSI-RS} = 60kHz	SCS _{CSI-RS} = 120kHz	
±3.5	±4	≥-3	Same value as CSI_RP in Table B.2.9-2, according to UE Power class, operating band and angle of arrival		-50
±4	±4	≥-6			
Note 1:	Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.				
Note 2:	Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.				
Note 3:	In the test cases, the CSI-RS Ês/lot and related parameters may need to be adjusted to ensure Ês/lot at UE baseband is above the value defined in this table.				
Note 4:	The requirements apply for CSI-RS Ês/lot ≤XdB. X=15 if timing offset between the reference measurement timing and the target CSI-RS is no larger than 0.5*CP, and X=4 if timing offset between the reference measurement timing and the target CSI-RS is larger than 0.5*CP but no larger than CP.				

10.1.16 SINR report mapping

10.1.16.1 SS-SINR and CSI-SINR measurement report mapping

The reporting range of SS-SINR and CSI-SINR for L3 reporting and L1 reporting is defined from -23 dB to 40 dB with 0.5 dB resolution. The mapping of measured quantity is defined in Table 10.1.16.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

The reporting range of differential SS-SINR and CSI-SINR for L1 reporting and L3 reporting is defined from -15 dB to 0 dB with 1 dB resolution.

The mapping of measured quantity is defined in Table 10.1.16.1-2. The range in the signalling may be larger than the guaranteed accuracy range.

Table 10.1.16.1-1: SS-SINR and CSI-SINR measurement report mapping

Reported value	Measured quantity value (L3 SS-SINR and L3 CSI-SINR)	Measured quantity value (L1 SS-SINR and L1 CSI-SINR)	Unit
SINR_0	$\text{SINR} < -23$	$\text{SINR} < -23$	dB
SINR_1	$-23 \leq \text{SINR} < -22.5$	$-23 \leq \text{SINR} < -22.5$	dB
SINR_2	$-22.5 \leq \text{SINR} < -22$	$-22.5 \leq \text{SINR} < -22$	dB
SINR_3	$-22 \leq \text{SINR} < -21.5$	$-22 \leq \text{SINR} < -21.5$	dB
SINR_4	$-21.5 \leq \text{SINR} < -21$	$-21.5 \leq \text{SINR} < -21$	dB
..	..	..	...
SINR_123	$38 \leq \text{SINR} < 38.5$	$38 \leq \text{SINR} < 38.5$	dB
SINR_124	$38.5 \leq \text{SINR} < 39$	$38.5 \leq \text{SINR} < 39$	dB
SINR_125	$39 \leq \text{SINR} < 39.5$	$39 \leq \text{SINR} < 39.5$	dB
SINR_126	$39.5 \leq \text{SINR} < 40$	$39.5 \leq \text{SINR} < 40$	dB
SINR_127	$40 \leq \text{SINR}$	$40 \leq \text{SINR}$	dB

Table 10.1.16.1-2: Differential SS-SINR and CSI-SINR measurement (for L1 reporting and L3 reporting) report mapping

Reported value	Measured quantity value (difference in measured SINR from largest SINR)	Unit
DIFFSINR_0	$0 \geq \Delta \text{SINR} > -1$	dB
DIFFSINR_1	$-1 \geq \Delta \text{SINR} > -2$	dB
DIFFSINR_2	$-2 \geq \Delta \text{SINR} > -3$	dB

DIFFSINR_3	$-3 \geq \Delta \text{SINR} > -4$	dB
DIFFSINR_4	$-4 \geq \Delta \text{SINR} > -5$	dB
DIFFSINR_5	$-5 \geq \Delta \text{SINR} > -6$	dB
DIFFSINR_6	$-6 \geq \Delta \text{SINR} > -7$	dB
DIFFSINR_7	$-7 \geq \Delta \text{SINR} > -8$	dB
DIFFSINR_8	$-8 \geq \Delta \text{SINR} > -9$	dB
DIFFSINR_9	$-9 \geq \Delta \text{SINR} > -10$	dB
DIFFSINR_10	$-10 \geq \Delta \text{SINR} > -11$	dB
DIFFSINR_11	$-11 \geq \Delta \text{SINR} > -12$	dB
DIFFSINR_12	$-12 \geq \Delta \text{SINR} > -13$	dB
DIFFSINR_13	$-13 \geq \Delta \text{SINR} > -14$	dB
DIFFSINR_14	$-14 \geq \Delta \text{SINR} > -15$	dB
DIFFSINR_15	$-15 \geq \Delta \text{SINR}$	dB

10.1.17 Power Headroom

10.1.17.1 Power Headroom Report

10.1.17.1.1 Power Headroom Report Mapping

The power headroom reporting range is from -32 ...+38 dB. Table 10.1.17.1-1 defines the report mapping.

Table 10.1.17.1-1: Power headroom report mapping

Reported value	Measured quantity value (dB)
POWER_HEADROOM_0	$\text{PH} < -32$
POWER_HEADROOM_1	$-32 \leq \text{PH} < -31$
POWER_HEADROOM_2	$-31 \leq \text{PH} < -30$
POWER_HEADROOM_3	$-30 \leq \text{PH} < -29$
...	...
POWER_HEADROOM_53	$20 \leq \text{PH} < 21$
POWER_HEADROOM_54	$21 \leq \text{PH} < 22$
POWER_HEADROOM_55	$22 \leq \text{PH} < 24$
POWER_HEADROOM_56	$24 \leq \text{PH} < 26$
POWER_HEADROOM_57	$26 \leq \text{PH} < 28$
POWER_HEADROOM_58	$28 \leq \text{PH} < 30$
POWER_HEADROOM_59	$30 \leq \text{PH} < 32$
POWER_HEADROOM_60	$32 \leq \text{PH} < 34$
POWER_HEADROOM_61	$34 \leq \text{PH} < 36$
POWER_HEADROOM_62	$36 \leq \text{PH} < 38$
POWER_HEADROOM_63	$\text{PH} \geq 38$

10.1.18 $P_{\text{CMAX},c,f}$

The UE is required to report the UE configured maximum output power ($P_{\text{CMAX},c,f}$) together with the power headroom. This clause defines the requirements for the $P_{\text{CMAX},c,f}$ reporting.

10.1.18.1 Report Mapping

The $P_{\text{CMAX},c,f}$ reporting range is defined from -29 dBm to 33 dBm with 1 dB resolution. Table 10.1.18.1-1 defines the reporting mapping.

Table 10.1.18.1-1 Mapping of $P_{\text{CMAX},c,f}$

Reported value	Measured quantity value	Unit
PCMAX_C_00	$P_{\text{CMAX},c,f} < -29$	dBm
PCMAX_C_01	$-29 \leq P_{\text{CMAX},c,f} < -28$	dBm
PCMAX_C_02	$-28 \leq P_{\text{CMAX},c,f} < -27$	dBm
...	...	...
PCMAX_C_61	$31 \leq P_{\text{CMAX},c,f} < 32$	dBm
PCMAX_C_62	$32 \leq P_{\text{CMAX},c,f} < 33$	dBm
PCMAX_C_63	$33 \leq P_{\text{CMAX},c,f}$	dBm

10.1.19 L1-RSRP accuracy requirements for FR1

10.1.19.1 SSB based L1-RSRP accuracy requirements

Unless otherwise specified, the requirements for absolute accuracy and relative accuracy of SSB based L1-RSRP in this clause apply to all SSBs of the serving cell configured for L1-RSRP measurement and all SSBs of cell(s) with different PCI from serving cell configured for L1-RSRP measurement in FR1.

10.1.19.1.1 Absolute Accuracy

The accuracy requirements in Table 10.1.19.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.

Table 10.1.19.1.1-1: SSB based L1-RSRP absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/lot	Io ^{Note 1} range				
			NR operating band groups ^{Note 2}	Minimum Io		Maximum Io	
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±5.0	±9.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±8.5	±11.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H,	N/A	N/A	-70	-50

NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.

NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.19.1.2 Relative Accuracy

The relative accuracy of SSB based L1-RSRP is defined as the L1-RSRP measured from one SSB compared to the largest measured value of L1-RSRP among all SSBs of the cell (serving cell or cell with different PCI from serving cell) on which UE performs L1-RSRP measurements.

The accuracy requirements in Table 10.1.19.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.

Table 10.1.19.1.2-1: SSB based L1-RSRP relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/lot Note 2	Io ^{Note 1} range				
			NR operating band groups Note 4	Minimum Io			Maximum Io
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The parameter SSB Ês/lot is the minimum SSB Ês/lot of the pair of SSBs to which the requirement applies.							
NOTE 3: Void							
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1.19.2 CSI-RS based L1-RSRP accuracy requirements

10.1.19.2.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-RSRP in this clause apply to all CSI-RS resources of the serving cell configured for L1-RSRP measurement.

The accuracy requirements in Table 10.1.19.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.19.2.1-1.

Table 10.1.19.2.1-1: CSI-RS based L1-RSRP absolute accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS Ês/Iot	Io ^{Note 1} range					
			NR operating band groups ^{Note 2}	Minimum Io			Maximum Io	
dB	dB	dB		dBm / SCS _{CSI-RS}			dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz		
±5.0	±9.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70			
±8.5	±11.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.								

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.

NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1.19.2.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-RSRP is defined as the L1-RSRP measured from one CSI-RS compared to the largest measured value of L1-RSRP among all CSI-RS resources of the serving cell.

The accuracy requirements in Table 10.1.19.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.19.2.2-1.

Table 10.1.19.2.2-1: CSI-RS based L1-RSRP relative accuracy in FR1

Accuracy		Conditions	
Normal condition	Extreme condition	CSI-RS	I_o ^{Note 1} range

dB	dB	dB	NR operating band groups Note 4	Minimum Io			Maximum Io	
				dBm / SCS _{CSI-RS}			dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz		
±3	±4	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
	NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50		
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.								
NOTE 2: The parameter CSI-RS Ês/Iot is the minimum CSI-RS Ês/Iot of the pair of CSI-RS resources to which the requirement applies.								
NOTE 3: Void								
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.								

10.1.19C L1-RSRP accuracy requirements for FR1 SAN

10.1.19C.1 SSB based L1-RSRP accuracy requirements

10.1.19C.1.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-RSRP in this clause apply to all SSBs of the serving cell configured for L1-RSRP measurement.

The accuracy requirements in Table 10.1.19C.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-5 [40] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.19.1 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.19C.1.1-1: SSB based L1-RSRP absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/lot	lo ^{Note 1} range				
			NR operating band groups ^{Note 2}	Minimum lo			Maximum lo
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±[5]	±[9.5]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-70
±[8.5]	±[11.5]	≥-3	NR_FDD_SAB_FR1_A	N/A	N/A	-70	-50
NOTE 1: lo is assumed to have constant EPRE across the bandwidth.							
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2A.							

10.1.19C.1.2 Relative Accuracy

The relative accuracy of SSB based L1-RSRP is defined as the L1-RSRP measured from one SSB compared to the largest measured value of L1-RSRP among all SSBs of the serving cell.

The accuracy requirements in Table 10.1.19C.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-5 [40] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.19.1 for a corresponding Band for each relevant SSB.
- Valid information for the SAN serving the target cell has been provided.

Table 10.1.19C.1.2-1: SSB based L1-RSRP relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$ Note 2	I_o Note 1 range				
			NR operating band groups Note 4	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
$\pm[3]$	$\pm[4]$	≥ -3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The parameter SSB $\hat{E}_s/\text{lot}$ is the minimum SSB $\hat{E}_s/\text{lot}$ of the pair of SSBs to which the requirement applies.							
NOTE 3: Void							
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2A.							

10.1.19C.2 CSI-RS based L1-RSRP accuracy requirements

10.1.19C.2.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-RSRP in this clause apply to all CSI-RS resources of the serving cell configured for L1-RSRP measurement.

The accuracy requirements in Table 10.1.19C.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-5 [39] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.19.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- Valid information for the SAN serving the target cell has been provided.

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.19C.2.1-1.

Table 10.1.19C.2.1-1: CSI-RS based L1-RSRP absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	CSI-RS $\hat{E}_s/\text{lot}$	I_o Note 1 range				
			NR operating band groups Note 2	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / $SCS_{\text{CSI-RS}}$		dBm/ BW_{Channel}	dBm/ BW_{Channel}

				SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz		
±[5]	±[9.5]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-70
±[8.5]	±[11.5]	≥-3	NR_FDD_SAB_FR1_A	N/A	N/A	-70	-50

NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2A.

10.1.19C.2.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-RSRP is defined as the L1-RSRP measured from one CSI-RS compared to the largest measured value of L1-RSRP among all CSI-RS resources of the serving cell.

The accuracy requirements in Table 10.1.19C.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-5 [39] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.19.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- Valid information for the SAN serving the target cell has been provided.

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.19C.2.2-1.

Table 10.1.19C.2.2-1: CSI-RS based L1-RSRP relative accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	CSI-RS $\hat{E}_s/I_0$ Note 2	I_0 Note 1 range				
			NR operating band groups Note 4	Minimum I_0		Maximum I_0	
dB	dB	dB		dBm / SCS _{CSI-RS}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz		
±[3]	±[4]	≥-3	NR_FDD_SAB_FR1_A	-121	-118	N/A	-50

NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter CSI-RS $\hat{E}_s/I_0$ is the minimum CSI-RS $\hat{E}_s/I_0$ of the pair of CSI-RS resources to which the requirement applies.
NOTE 3: Void
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2A.

10.1.20 L1-RSRP accuracy requirements for FR2

10.1.20.1 SSB based L1-RSRP accuracy requirements

Unless otherwise specified, the requirements for absolute accuracy and relative accuracy of SSB based L1-RSRP in this clause apply to all SSBs of the serving cell configured for L1-RSRP measurement and all SSBs of cell(s) with different PCI from serving cell configured for L1-RSRP measurement in FR2.

10.1.20.1.1 Absolute Accuracy

The accuracy requirements in Table 10.1.20.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.20.1.1-1: SSB based L1-RSRP absolute accuracy in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	SSB Ês/lot	I _o ^{Note 1} range			
			Minimum I _o			Maximum I _o
			dBm / SCS _{SSB} ^{Note 2}		dBm/BW _{Channel}	dBm/BW _{Channel}
SCS _{SSB} = 120kHz SCS _{SSB} = 240kHz						
±6.5	±9.5	≥-3	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival		N/A	-70
±8.5	±11.5	≥-3	N/A		-70	-50
NOTE 1: I _o specified at the Reference point, and assumed to have constant EPRE across the bandwidth.						
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.						
NOTE 3: In the test cases, the SSB Ês/lot and related parameters may need to be adjusted to ensure Ês/lot at UE baseband is above the value defined in this table.						

10.1.20.1.2 Relative Accuracy

The relative accuracy of SSB based L1-RSRP is defined as the L1-RSRP measured from one SSB compared to the largest measured value of L1-RSRP among all SSBs of the cell (serving cell or cell with different PCI from serving cell) on which UE performs L1-RSRP measurements.

The accuracy requirements in Table 10.1.20.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.20.1.2-1: SSB based L1-RSRP relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	I_o ^{Note 1} range		
			Minimum I_o		Maximum I_o dBm/BW _{Channel}
			dBm / SCS_{SSB} ^{Note 3}		
dB	dB	dB	$SCS_{SSB} = 120\text{kHz}$	$SCS_{SSB} = 240\text{kHz}$	
± 6.5	± 9.5	≥ -3	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival		-50
NOTE 1: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
NOTE 2: The parameter SSB $\hat{E}_s/\text{lot}$ is the minimum SSB $\hat{E}_s/\text{lot}$ of the pair of SSBs to which the requirement applies.					
NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					

NOTE 4: In the test cases, the SSB $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.

10.1.20.2 CSI-RS based L1-RSRP accuracy requirements

10.1.20.2.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-RSRP in this clause apply to all CSI-RS resources of the serving cell configured for L1-RSRP measurement.

The accuracy requirements in Table 10.1.20.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.20.2.1-1.

Table 10.1.20.2.1-1: CSI-RS based L1-RSRP absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/lot	I ₀ ^{Note 1} range		
			Minimum I ₀		Maximum I ₀
			dBm / SCS _{CSI-RS} ^{Note 2}		dBm/BW _{Channel}
dB	dB	dB	SCS _{CSI-RS} = 60kHz	SCS _{CSI-RS} = 120kHz	dBm/BW _{Channel}
			Same value as CSI-RS _{RP} in Table B.2.4.2-2, according to UE Power class, operating band and angle of arrival		
±6.5	±9.5	≥-3			-70
±8.5	±11.5	≥-3	N/A		-50
NOTE 1: I ₀ specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
NOTE 3: In the test cases, the CSI-RS Ês/lot and related parameters may need to be adjusted to ensure Ês/lot at UE baseband is above the value defined in this table.					

10.1.20.2.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-RSRP is defined as the L1-RSRP measured from one CSI-RS compared to the largest measured value of L1-RSRP among all CSI-RS resources of the serving cell.

The accuracy requirements in Table 10.1.20.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1.20.2.2-1.

Table 10.1.20.2.2-1: CSI-RS based L1-RSRP relative accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS Ês/lot	Io ^{Note 1} range		
			Minimum Io		Maximum Io
			dBm / SCS _{CSI-RS}		
dB	dB	dB	SCS _{CSI-RS} = 60kHz	SCS _{CSI-RS} = 120kHz	dBm/BW _{Channel}
±6.5	±9.5	≥-3	Same value as CSI-RS RP in Table B.2.4.2-2, according to UE Power class, operating band and angle of arrival		-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
NOTE 2: The parameter CSI-RS Ês/lot is the minimum CSI-RS Ês/lot of the pair of CSI-RS resources to which the requirement applies.					
NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
NOTE 4: In the test cases, the CSI-RS Ês/lot and related parameters may need to be adjusted to ensure Ês/lot at UE baseband is above the value defined in this table.					

10.1.21 SFTD accuracy requirements

10.1.21.1 SFTD accuracy requirements for NE-DC

The SFN and frame timing difference (SFTD) is measured between PCell and E-UTRAN PSCell under NE-DC.

The accuracy requirements in Table 10.1.21.1-4 are applicable under the following conditions:

For FR1 PCell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Io range defined in Table 10.1.21.1-1.

Table 10.1.21.1-1: PCell Io range conditions in FR1

Parameter	Io ^{Note 1} range			
	NR operating band groups ^{Note 4, 5}	Minimum Io ^{Note 2, 3}		Maximum Io dBm/BW _{Channel}
		dBm/ SCS _{SSB}		
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-121	-118	-50
	NR_FDD_FR1_B	-120.5	-117.5	-50
	NR_TDD_FR1_C	-120	-117	-50
	NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-50
	NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-50
	NR_FDD_FR1_F	-118.5	-115.5	-50
	NR_FDD_FR1_G	-118	-115	-50
	NR_FDD_FR1_H	-117.5	-114.5	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.				
NOTE 2: The condition level is increased by ΔR _{IB,c} as defined in clause 7.3B in TS 38.101-3 [20], depending on E-UTRA – NR band combination.				
NOTE 3: The condition level is increased by MSD as defined in clause 7.3B in TS 38.101-3 [20], if applicable depending on E-UTRA – NR band combination.				
NOTE 4: NR operating band groups are as defined in clause 3.5.				

NOTE 5: Only NR bands within EN-DC band combinations as specified in clause 5.5B in TS 38.101-3 [20] are applicable.

For FR2 PCell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- I_o range defined in Table 10.1.21.1-2.

Table 10.1.21.1-2: PCell I_o range conditions in FR2

Parameter	I_o ^{Note 1} range		
	Minimum I_o ^{Note 2, 3}		Maximum I_o
	dBm/ SCS_{SSB}		dBm/BW _{Channel}
	$SCS_{SSB} = 15$ kHz	$SCS_{SSB} = 30$ kHz	
Conditions	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival	-50
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth and specified at the Reference point.			
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.			
NOTE 3: In the test cases, the $SSB \hat{E}_s/I_{ot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/I_{ot}$ at UE baseband is above the value defined in this table.			

For E-UTRA PCell SFN and frame timing measurement:

- Cell specific reference signals are transmitted either from one, two or four antenna ports.
- Conditions defined in TS 36.101 [25] Clause 7.3 for reference sensitivity are fulfilled.
- No changes to the uplink transmission timing are applied during the measurement period.
- $RSRP|_{dBm}$ according to Annex B.3.5 in TS 36.101 [25] for a corresponding Band.
- I_o range defined in Table 10.1.21.1-3.

Table 10.1.21.1-3: E-UTRA PCell I_o range conditions

Parameter	I_o ^{Note 1} range		
	E-UTRA operating band groups ^{Note 3}	Minimum I_o	Maximum I_o
Conditions		dBm/15kHz ^{Note 2}	dBm/BW _{Channel}
	FDD_A, TDD_A	-121	-50
	FDD_C, TDD_C	-120	-50
	FDD_D	-119.5	-50
	FDD_E, TDD_E	-119	-50
	FDD_F	-118.5	-50
	FDD_G	-118	-50
	FDD_H	-117.5	-50
	FDD_N	-114.5	-50
NOTE 1: When in dBm/15kHz, the minimum I_o condition is expressed as the average I_o per RE over all REs in that symbol. I_o may be different in different symbols within a subframe.			
NOTE 2: The condition level is increased by $\Delta > 0$, when applicable, as described in clauses B.4.2 and B.4.3 in TS 36.133 [15].			
NOTE 3: E-UTRA operating band groups are as defined in clause 3.5 in TS 36.133 [15].			

Table 10.1.21.1-4: SFTD measurement accuracy

Accuracy	Conditions	
	$\hat{E}_s/I_{ot}$ ^{Note 2}	Frequency range
T_S ^{Note 1}	dB	

40*64*Tc	≥-3	FR1
40*64*Tc		FR2
NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6].		
NOTE 2: The parameter Ês/lot is the minimum Ês/lot of the pair of cells to which the requirement applies.		

10.1.21.2 SFTD accuracy requirements for NR-DC

The SFN and frame timing difference (SFTD) is measured between PCell in FR1 and PSCell in FR2 under NR dual connectivity.

The accuracy requirements in Table 10.1.21.2-3 are applicable under the following conditions:

For FR1 PCell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Io range defined in Table 10.1.21.2-1.

Table 10.1.21.2-1: PCell Io range conditions in FR1

Parameter	Io ^{Note 1} range			
	NR operating band groups ^{Note 2}	Minimum Io		Maximum Io dBm/BW _{Channel}
		dBm/ SCS _{SSB}		
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-121	-118	-50
	NR_FDD_FR1_B	-120.5	-117.5	-50
	NR_TDD_FR1_C	-120	-117	-50
	NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-50
	NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-50
	NR_FDD_FR1_F	-118.5	-115.5	-50
	NR_FDD_FR1_G	-118	-115	-50
	NR_FDD_FR1_H	-117.5	-114.5	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.				
NOTE 2: NR operating band groups are as defined in clause 3.5.2.				

For FR2 PSCell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Io range defined in Table 10.1.21.2-2.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.21.2-2: PSCell Io range conditions in FR2

Parameter	Io ^{Note 1} range		
	Minimum Io ^{Note 2, 3}		Maximum Io dBm/BW _{Channel}
	dBm/ SCS _{SSB}		
	SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth and specified at the Reference point.			
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.			
NOTE 3: In the test cases, the SSB Ês/Iot and related parameters may need to be adjusted to ensure Ês/Iot at UE baseband is above the value defined in this table.			

Table 10.1.21.2-3: SFTD measurement accuracy

Accuracy	Conditions	
	$\hat{E}_s/\text{lot}$ ^{Note 2}	Frequency range
T_S ^{Note 1}	dB	
$40 \cdot 64 \cdot T_C$	≥ -3	Between FR1 and FR2
NOTE 1: T_C is the basic timing unit defined in TS 38.211 [6].		
NOTE 2: The parameter $\hat{E}_s/\text{lot}$ is the minimum $\hat{E}_s/\text{lot}$ of the pair of cells to which the requirement applies.		

10.1.21.3 Inter frequency SFTD accuracy requirements

The SFN and frame timing difference (SFTD) is measured between PCell and inter-frequency neighbour cell.

The accuracy requirements in Table 10.1.21.3-3 are applicable under the following conditions:

For FR1 PCell, inter frequency neighbour cell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- I_o range defined in Table 10.1.21.3-1.

Table 10.1.21.3-1: PCell, inter frequency neighbour cell I_o range conditions in FR1

Parameter	Io ^{Note 1} range			
	NR operating band groups ^{Note 2}	Minimum Io		Maximum Io
		dBm/ SCS _{SSB}		
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-121	-118	-50
	NR_FDD_FR1_B	-120.5	-117.5	-50
	NR_TDD_FR1_C	-120	-117	-50
	NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-50
	NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-50
	NR_FDD_FR1_F	-118.5	-115.5	-50
	NR_FDD_FR1_G	-118	-115	-50
	NR_FDD_FR1_H	-117.5	-114.5	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.				
NOTE 2: NR operating band groups are as defined in clause 3.5.2.				

For FR2 PCell, inter frequency neighbour cell SFN and frame timing measurement:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- I_o range defined in Table 10.1.21.3-2.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].

Table 10.1.21.3-2: PCell, inter frequency neighbour cell I_o range conditions in FR2

Parameter	Io ^{Note 1} range		
	Minimum Io ^{Note 2, 3}		Maximum Io
	dBm/ SCS _{SSB}		
	SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	dBm/BW _{Channel}
Conditions	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival	Same value as SSB_RP in Table B.2.4.1-2, according to UE Power class, operating band and angle of arrival	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth and specified at the Reference point. NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.			

NOTE 3: In the test cases, the SSB $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.

Table 10.1.21.3-3: Inter frequency SFTD measurement accuracy

Accuracy	Conditions	
	$\hat{E}_s/\text{lot}$ ^{Note 2}	Frequency range
T_s ^{Note 1}	dB	
40*64*T _c	≥ -3	FR1, FR2
NOTE 1: T _c is the basic timing unit defined in TS 38.211 [6].		
NOTE 2: The parameter $\hat{E}_s/\text{lot}$ is the minimum $\hat{E}_s/\text{lot}$ of the pair of cells to which the requirement applies.		

10.1.22 CLI measurement accuracy requirements

10.1.22.1 SRS-RSRP

10.1.22.1.1 SRS-RSRP Accuracy

The SRS-RSRP measurement reported by the UE shall fulfil the accuracy requirements defined in Table 10.1.22.1.1-1 for FR1 and Table 10.1.22.1.1-2 for FR2, provided that the following conditions are met. The accuracy requirements in this clause are derived based on AWGN radio propagation conditions.

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for SRS-RSRP measurements are fulfilled according to Annex B.2.z for a corresponding Band for each relevant SRS resource configured for measurement.
- The time difference between UE's DL reference timing in the serving cell and SRS arrival time is no larger than $T_{\text{error_SRS_RSRP}}$, where
 - $T_{\text{error_SRS_RSRP}} = T_C \times N_{\text{TA_offset}} + 4.67\mu\text{s}$ for FR1
 - $T_{\text{error_SRS_RSRP}} = T_C \times N_{\text{TA_offset}} + 3.67\mu\text{s}$ for FR2
 - $N_{\text{TA_offset}}$ is defined in Table 7.1.2-2
 - T_C is 0.509ns
- The number of SRS ports in the SRS resource configured for measurement is 1,
- The number of symbols in the SRS resource configured for measurement is 1,
- The number of repetitions in the SRS resource configured for measurement is 1,
- Frequency hopping, sequence group hopping or sequence hopping is disabled in the SRS resource configured for measurement,
- The bandwidth of the SRS resource is 48 PRBs.
- One of the following conditions is met
 - There is no other SRS resource with the same root sequence and on the same symbol and with same comb as the relevant SRS resource.
 - If multiple SRS resources are on the same symbol and with same comb, the distance between cyclic shifts of any two resources is no less than 6 if transmissionComb = n4, and no less than 4 if transmissionComb = n2.

Table 10.1.22.1.1-1: SRS-RSRP absolute accuracy in FR1

Accuracy	Conditions
----------	------------

Normal condition			Extreme condition			SRS Es/lot	lo ^{Note 1} range					
							NR operating band groups Note 2	Minimum lo			Maximum lo	
dB						dB		dBm / SCS _{SRS}			dBm/B W Channel	dBm/B W _{Channel}
SCS _{SRS} (kHz)			SCS _{SRS} (kHz)					SCS _S RS = 15 kHz	SCS _S RS = 30 kHz	SCS _S RS = 60 kHz		
15	30	60	15	30	60							
±3	±3.5	±5	±7.5	±8	±9.5	≥1	NR_TDD_FR1_A,	-120	-117	-114	N/A	-70
							NR_TDD_FR1_C	-119	-116	-113	N/A	-70
							NR_TDD_FR1_D	-118.5	-115.5	-112.5	N/A	-70
							NR_TDD_FR1_E	-118	-115	-112	N/A	-70
±6.5	±7	±8.5	±9.5	±10	±11.5	≥1	NR_TDD_FR1_A, NR_TDD_FR1_C, NR_TDD_FR1_D, NR_TDD_FR1_E	N/A	N/A	N/A	-70	-50
NOTE 1: lo is assumed to have constant EPRE across the bandwidth.												
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.												

Table 10.1.22.1.1-2: SRS-RSRP absolute accuracy in FR2

Accuracy				Conditions				
Normal condition		Extreme condition		SRS Ês/lot	Io ^{Note 1} range			
					Minimum Io		Maximum Io	
dB				dB	dBm / SCS _{SRS} ^{Note 2}		dBm/BW _{Channel}	dBm/BW _{Channel}
SCS _{SRS} (kHz)		SCS _{SRS} (kHz)			SCS _{SRS} =	SCS _{SRS} =		
60	120	60	120		60kHz	120kHz		
±6	±8.5	±9	±11.5	≥1	Same value as SRS_RP in Table B.2.7-2, according to UE Power class, operating band and angle of arrival		N/A	-70
±9	±11.5	±11	±13.5	≥1	N/A		-70	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.								
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.								
NOTE 3: In the test cases, the SSB Ês/lot and related parameters may need to be adjusted to ensure Ês/lot at UE baseband is above the value defined in this table.								

10.1.22.1.2 SRS-RSRP report mapping

The reporting range of SRS-RSRP is defined from -140 dBm to -44 dBm with 1 dB resolution. The mapping of measured quantity is defined in Table 10.1.22.1.2-1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 10.1.22.1.2-1: SRS-RSRP measurement report mapping

Reported value	Measured quantity value	Unit
SRS-RSRP_0	SRS-RSRP<-140	dBm
SRS-RSRP_1	-140≤ SRS-RSRP<-139	dBm
SRS-RSRP_2	-139≤ SRS-RSRP<-138	dBm
SRS-RSRP_3	-138≤ SRS-RSRP<-137	dBm
SRS-RSRP_4	-137≤ SRS-RSRP<-136	dBm
..	..	...
SRS-RSRP_95	-46≤ SRS-RSRP<-45	dBm
SRS-RSRP_96	-45≤ SRS-RSRP<-44	dBm
SRS-RSRP_97	-44≤ SRS-RSRP	dBm
SRS-RSRP_98	Infinity	
Note: 'Infinity' means that UE cannot detect SRS due to too strong signal to measure.		

10.1.22.2 CLI-RSSI

10.1.22.2.1 CLI-RSSI Accuracy

The CLI-RSSI measurement reported by the UE shall fulfil the accuracy requirements defined in Table 10.1.22.2.1-1 for FR1 and Table 10.1.22.2.1-2 for FR2, provided that the following conditions are met.

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

Table 10.1.22.2.1-1: CLI-RSSI absolute accuracy in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	Io ^{Note 1} range					
		NR operating band groups ^{Note 2}	Minimum Io			Maximum Io	
dB	dB		dBm / SCS _{SRS}			dBm/BW _{Channel}	dBm/BW _{Channel}
			SCS _{SRS} = 15 kHz	SCS _{SRS} = 30 kHz	SCS _{SRS} = 60 kHz		
±3.5	±6.5	NR_TDD_FR1_A,	-120	-117	-114	N/A	-70
		NR_TDD_FR1_C	-119	-116	-113	N/A	-70
		NR_TDD_FR1_D	-118.5	-115.5	-112.5	N/A	-70
		NR_TDD_FR1_E	-118	-115	-112	N/A	-70
±5.5	±8.5	Note 3	Note 3	Note 3	Note 3	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.							
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.							
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							

Table 10.1.22.2.1-2: CLI-RSSI absolute accuracy in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	Io ^{Note 1} range			
		Minimum Io		Maximum Io	
		dBm / SCS _{SRS} ^{Note 2}		dBm/BW _{Channel}	
		SCS _{SRS} = 60kHz	SCS _{SRS} = 120kHz		
±5	±8	Same value as SRS_RP in Table B.2.7-2, according to UE Power class, operating band and angle of arrival		N/A	
				-70	

± 7	± 10	Note 4	-70	-50
NOTE 1: I_0 specified at the Reference point, and assumed to have constant EPRE across the bandwidth.				
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.				
NOTE 3: In the test cases, the SSB $\hat{E}_s/I_0$ and related parameters may need to be adjusted to ensure $\hat{E}_s/I_0$ at UE baseband is above the value defined in this table.				
NOTE 4: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.				

10.1.22.2.2 CLI-RSSI report mapping

The reporting range of CLI-RSSI is defined from -100 dBm to -25 dBm with 1 dB resolution. The mapping of measured quantity is defined in Table 10.1.22.2.2-1. The range in the signalling may be larger than the guaranteed accuracy range. UE shall scale the measured CLI-RSSI to report a nominal RSSI equivalent to 6RB measurement with 15kHz SCS.

Table 10.1.22.2.2-1: CLI-RSSI measurement report mapping

Reported value	Measured quantity value	Unit
CLI-RSSI_00	CLI-RSSI < -100	dBm
CLI-RSSI_01	$-100 \leq \text{CLI-RSSI} < -99$	dBm
CLI-RSSI_02	$-99 \leq \text{CLI-RSSI} < -98$	dBm
...	...	...
CLI-RSSI_74	$-27 \leq \text{CLI-RSSI} < -26$	dBm
CLI-RSSI_75	$-26 \leq \text{CLI-RSSI} < -25$	dBm
CLI-RSSI_76	$-25 \leq \text{CLI-RSSI}$	dBm

10.1.23 RSTD Measurements

10.1.23.1 Introduction

The requirements in Clause 10.1.23 shall apply, provided the UE has received *nr-DL-TDOA-RequestLocationInformation* message from LMF via LPP [34] requesting the UE to report one or more DL RSTD measurements defined in TS 38.215 [4]. The requirements in Clause 10.1.23 shall apply:

- when UE is in RRC_CONNECTED state and the measurement is performed with MG or without MG,
- when UE is in RRC_INACTIVE state.

10.1.23.2 Measurement Accuracy Requirements

The accuracy requirements for RSTD measurement shall be within $\pm(X+Y+Z+\Delta)$ T_c.

X is defined in Table 10.1.23.2-1 for AWGN channel and Table 10.1.23.2-3 for fading channel for FR1, provided that the following conditions are met.

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for RSTD measurements are fulfilled according to Annex B.2.14 for a corresponding Band for each relevant PRS resource configured for measurement.
- UE does not perform positioning measurement with reduced number of samples.

X is defined in Table 10.1.23.2-2 for AWGN channel and Table 10.1.23.2-4 for fading channel for FR2, provided that the following conditions are met.

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

- Conditions for RSTD measurements are fulfilled according to Annex B.2.14 for a corresponding Band for each relevant PRS resource configured for measurement.
- UE does not perform positioning measurement with reduced number of samples.

X is defined in Table 10.1.23.2-7 for AWGN channel in FR1 provided that the following conditions are met.

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for RSTD measurements are fulfilled according to Annex B.2.14 for a corresponding Band for each relevant PRS resource configured for measurement.
- UE supports positioning measurement with reduced number of sample and is indicated by LMF to perform positioning measurement with reduced number of samples.

X is defined in Table 10.1.23.2-8 for AWGN channel in FR2 provided that the following conditions are met.

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for RSTD measurements are fulfilled according to Annex B.2.14 for a corresponding Band for each relevant PRS resource configured for measurement.
- UE supports positioning measurement with reduced number of sample and is indicated by LMF to perform positioning measurement with reduced number of samples.

Note: The requirements for fading channel in this clause are derived based on TDL-A (30 ns delay spread, 5Hz) and TDL-C (60 ns delay spread, 300 Hz) channel models for FR1 and FR2 respectively.

When UE measures RSTD on PRS resources belonging to different PFLs, then the RSTD accuracy is defined as the accuracy corresponding to the largest accuracy value among different PFLs.

If the UE doesn't support Rx TEG reporting for RSTD measurement or when the measurements of reference cell and neighbour cell belong to different Rx TEGs, Y, Z and Δ are defined as follows:

- When UE measures RSTD on PRS resources belonging to same PFL, $Y=32 T_c$, provided that the time offset between the two PRS resource instances from the reference cell and the neighbor cell, which are used for a single RSTD estimate, is no greater than 160 ms.
- When UE measures RSTD on PRS resources belonging different PFLs, $Y=256 T_c$, provided that the time offset between the two PRS resource instances from the reference cell and the neighbor cell, which are used for a single RSTD estimate, is no greater than 1280 ms.
- Z is defined in Table 10.1.23.2-5 for FR1 and Table 10.1.23.2-6 for FR2, respectively.
- Δ is zero for single PFL, and is defined in Table 10.1.23.2-5a for FR1 and Table 10.1.23.2-6a for FR2, respectively, for dual PFL.

If the measurements of reference cell and neighbour cell belong to the same Rx TEG, i.e. associated and reported with a common Rx TEG ID, then the sum of $Y+Z+\Delta$ is equal to the timing error margin of the Rx TEG reported in *nr-UE-RxTEG-TimingErrorMargin*. The timing error margin reported via *nr-UE-RxTEG-TimingErrorMargin* cannot be larger than the value of $(Y+Z+\Delta)$ defined when the UE does not associate the measurements with the same Rx TEG.

Table 10.1.23.2-1: RSTD absolute accuracy in FR1 for AWGN channel

Accuracy	Conditions						
	PRS $\hat{E}_s/\text{lot}$	PRS SCS	PRS bandwidth Note 1	PRS resource repetition ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$) Note 2	Io Note 3 range		
					NR operating band groups Note 4	Minimum Io	Maximum Io
T_c Note 5	dB	kHz	RB			dBm/SCS	dBm/BW _{Channel}

132	(PRS $\hat{E}_s/\text{lot}$) _{ref} ≥ -6dB (PRS $\hat{E}_s/\text{lot}$) _i ≥ -13dB	15	≥ 24	≥ 4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-50
					NR_FDD_FR1_B	-126.5	-50
					NR_TDD_FR1_C	-126	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-50
					NR_FDD_FR1_F	-124.5	-50
					NR_FDD_FR1_G, NR_TDD_FR1_G	-124	-50
					NR_FDD_FR1_H	-123.5	-50
98		≥ 52	≥ 1	Note 6	Note 6	Note 6	
42		≥ 104	≥ 1	Note 6	Note 6	Note 6	
75		30	≥ 24	≥ 4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-50
					NR_FDD_FR1_B	-123.5	-50
					NR_TDD_FR1_C	-123	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-50
					NR_FDD_FR1_F	-121.5	-50
					NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-50
					NR_FDD_FR1_H	-120.5	-50
48		≥ 48	≥ 1	Note 6	Note 6	Note 6	
24		≥ 132	≥ 1	Note 6	Note 6	Note 6	
50		60	≥ 24	≥ 4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
					NR_FDD_FR1_B	-120.5	-50
					NR_TDD_FR1_C	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-50
					NR_FDD_FR1_F	-118.5	-50
					NR_FDD_FR1_G, NR_TDD_FR1_G	-118	-50
					NR_FDD_FR1_H	-117.5	-50
24		≥ 64	≥ 1	Note 6	Note 6	Note 6	
10		≥ 132	≥ 1	Note 6	Note 6	Note 6	
NOTE 1: Minimum PRS bandwidth, which is minimum of the PRS bandwidths of the reference resource and the measured neighbour resource i.							
NOTE 2: Minimum number of PRS resource repetitions among the reference resource and the measured neighbour resource i. $T_{\text{rep}}^{\text{PRS}}$, L_{PRS} , $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter <i>dl-PRS-ResourceRepetitionFactor</i> , <i>dl-PRS-NumSymbols</i> and <i>dl-PRS-CombSizeN</i> defined in TS 37.355 [34], respectively.							
NOTE 3: I_0 is assumed to have constant EPRE across the bandwidth.							
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.							
NOTE 5: T_c is the basic timing unit defined in TS 38.211 [6].							
NOTE 6: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.							
NOTE 7: Void							

Table 10.1.23.2-2: RSTD absolute accuracy in FR2 for AWGN channel

Accuracy	Conditions					
	PRS $\hat{E}_s/\text{lot}$	PRS SCS	PRS bandwidth Note 1	PRS resource repetition ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$) Note 2	I_0 Note 3 range	
					Minimum I_0	Maximum I_0

T_c ^{Note 4}	dB	kHz	RB		dBm/SCS	dBm/BW _{Channel}
35	(PRS $\hat{E}_s/\text{lot}$) _{ref} $\geq$ -6dB	60	≥ 24	≥ 4	Same value as PRS_RP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
24			≥ 64	≥ 1	Note 5	Note 5
11			≥ 132	≥ 1	Note 5	Note 5
24	(PRS $\hat{E}_s/\text{lot}$) _i $\geq$ -13dB	120	≥ 32	≥ 4	Same value as PRS_RP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
13			≥ 64	≥ 1	Note 5	Note 5
6			≥ 128	≥ 1	Note 5	Note 5

NOTE 1: Minimum PRS bandwidth, which is minimum of the PRS bandwidths of the reference resource and the measured neighbour resource i.

NOTE 2: Minimum number of PRS resource repetitions among the reference resource and the measured neighbour resource i. $T_{\text{rep}}^{\text{PRS}}$, L_{PRS} , $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor*, *dl-PRS-NumSymbols* and *dl-PRS-CombSizeN* defined in TS 37.355 [34], respectively.

NOTE 3: I_0 is assumed to have constant EPRE across the bandwidth.

NOTE 4: T_c is the basic timing unit defined in TS 38.211 [6].

NOTE 5: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.

NOTE 6: Void

Table 10.1.23.2-3: RSTD absolute accuracy in FR1 for fading channel

Accuracy	Conditions							
	PR <i>S</i> Ê <i>s</i> /lot	PR <i>S</i> SCS	PR <i>S</i> bandwidth Note 1	PR <i>S</i> resource repetition ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$) Note 2	I ₀ ^{Note 3} range			
					NR operating band groups ^{Note 4}	Minimum I ₀	Maximum I ₀	
T _c ^{Note 5}	dB	kHz	RB			dBm/SCS	dBm/BW _{Channel}	
247	(PR <i>S</i> Ê <i>s</i> /lot) _{ref} ≥ -6dB	15	≥ 24	≥ 4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-50	
					NR_FDD_FR1_B	-126.5	-50	
					NR_TDD_FR1_C	-126	-50	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-50	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-50	
					NR_FDD_FR1_F	-124.5	-50	
					NR_FDD_FR1_G, NR_TDD_FR1_G	-124	-50	
					NR_FDD_FR1_H	-123.5	-50	
140		≥ 52	≥ 1	Note 6	Note 6	Note 6		
86		≥ 104	≥ 1	Note 6	Note 6	Note 6		
118		(PR <i>S</i> Ê <i>s</i> /lot) _i ≥ -13dB	30	≥ 24	≥ 4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-50
						NR_FDD_FR1_B	-123.5	-50
						NR_TDD_FR1_C	-123	-50
						NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-50
						NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-50
	NR_FDD_FR1_F					-121.5	-50	
	NR_FDD_FR1_G, NR_TDD_FR1_G					-121	-50	
	NR_FDD_FR1_H					-120.5	-50	
109	≥ 48		≥ 1	Note 6	Note 6	Note 6		
28	≥ 132		≥ 1	Note 6	Note 6	Note 6		

147					NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
					NR_FDD_FR1_B	-120.5	-50
					NR_TDD_FR1_C	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-50
					NR_FDD_FR1_F	-118.5	-50
					NR_FDD_FR1_G, NR_TDD_FR1_G	-118	-50
					NR_FDD_FR1_H	-117.5	-50
27			≥ 64	≥ 1	Note 6	Note 6	Note 6
21			≥ 132	≥ 1	Note 6	Note 6	Note 6

NOTE 1: Minimum PRS bandwidth, which is minimum of the PRS bandwidths of the reference resource and the measured neighbour resource i.

NOTE 2: Minimum number of PRS resource repetitions among the reference resource and the measured neighbour resource i. $T_{\text{rep}}^{\text{PRS}}$, L_{PRS} , $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor*, *dl-PRS-NumSymbols* and *dl-PRS-CombSizeN* defined in TS 37.355 [34], respectively.

NOTE 3: I_0 is assumed to have constant EPRE across the bandwidth.

NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

NOTE 5: T_c is the basic timing unit defined in TS 38.211 [6].

NOTE 6: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.

NOTE 7: Void

Table 10.1.23.2-4: RSTD absolute accuracy in FR2 for fading channel

Accuracy	Conditions					
	PRS $\hat{E}_s/\text{lot}$	PRS SCS	PRS bandwidth Note 1	PRS resource repetition ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$) Note 2	I_0 Note 3 range	
T_c Note 4	dB	kHz	RB		dBm/SCS	dBm/BW _{channel}
83	(PRS $\hat{E}_s/\text{lot})_{\text{ref}} \geq -6\text{dB}$	60	≥ 24	≥ 4	Same value as PRS_RP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
64			≥ 64	≥ 1	Note 5	Note 5
46			≥ 132	≥ 1	Note 5	Note 5
48	(PRS $\hat{E}_s/\text{lot})_i \geq -13\text{dB}$	120	≥ 32	≥ 4	Same value as PRS_RP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
54			≥ 64	≥ 1	Note 5	Note 5
36			≥ 128	≥ 1	Note 5	Note 5

NOTE 1: Minimum PRS bandwidth, which is minimum of the PRS bandwidths of the reference resource and the measured neighbour resource i.

NOTE 2: Minimum number of PRS resource repetitions among the reference resource and the measured neighbour resource i. $T_{\text{rep}}^{\text{PRS}}$, L_{PRS} , $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor*, *dl-PRS-NumSymbols* and *dl-PRS-CombSizeN* defined in TS 37.355 [34], respectively.

NOTE 3: I_0 is assumed to have constant EPRE across the bandwidth.

NOTE 4: T_c is the basic timing unit defined in TS 38.211 [6].

NOTE 5: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.

NOTE 6: Void

Table 10.1.23.2-5: Margin for RSTD measurement accuracy in FR1

PRS BW (RB number)			Margin (T_c)
SCS=15kHz	SCS=30kHz	SCS=60kHz	

≥ 24	N/A	N/A	120
≥ 52	≥ 24	N/A	72
≥ 104	≥ 48	≥ 24	36
N/A	≥ 132	≥ 64	16
N/A	N/A	≥ 132	12

Table 10.1.23.2-5a: Margin Δ for RSTD measurement accuracy in FR1

PRS BW (RB number)			Margin (Tc)
SCS=15kHz	SCS=30kHz	SCS=60kHz	
≥ 24	N/A	N/A	128
≥ 52	≥ 24	N/A	64
≥ 104	≥ 48	≥ 24	32
N/A	≥ 132	≥ 64	16
N/A	N/A	≥ 132	8

Table 10.1.23.2-6: Margin for RSTD measurement accuracy in FR2

PRS BW (RB number)		Margin (Tc)
SCS=60kHz	SCS=120kHz	
≥ 24	N/A	72
≥ 64	≥ 32	32
≥ 132	≥ 64	16
N/A	≥ 128	12

Table 10.1.23.2-6a: Margin Δ for RSTD measurement accuracy in FR2

PRS BW (RB number)		Margin (Tc)
SCS=60kHz	SCS=120kHz	
≥ 24	N/A	32
≥ 64	≥ 32	16
≥ 132	≥ 64	8
N/A	≥ 128	4

Table 10.1.23.2-7: RSTD absolute accuracy in FR1 for AWGN channel with reduced number of samples

Accuracy	Conditions						
	PRS $\hat{E}_s/\text{lot}$	PRS SCS	PRS bandwidth Note 1	PRS resource repetition ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$) Note 2	Io Note 3 range		
					NR operating band groups Note 4	Minimum Io	Maximum Io
Tc Note 5	dB	kHz	RB			dBm/SCS	dBm/BW _{channel}
98	(PRS $\hat{E}_s/\text{lot}$) _{ref} $\geq$ -3dB (PRS $\hat{E}_s/\text{lot}$) _i $\geq$ -6dB	15	≥ 52	≥ 1	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-50
					NR_FDD_FR1_B	-126.5	-50
					NR_TDD_FR1_C	-126	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-50
					NR_FDD_FR1_F	-124.5	-50
					NR_FDD_FR1_G, NR_TDD_FR1_G	-124	-50
					NR_FDD_FR1_H	-123.5	-50
42			≥ 104	≥ 1	Note 6	Note 6	Note 6

48		30	≥ 48	≥ 1	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-50
					NR_FDD_FR1_B	-123.5	-50
					NR_TDD_FR1_C	-123	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-50
					NR_FDD_FR1_F	-121.5	-50
					NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-50
					NR_FDD_FR1_H	-120.5	-50
24			≥ 132	≥ 1	Note 6	Note 6	Note 6
24		60	≥ 64	≥ 1	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
					NR_FDD_FR1_B	-120.5	-50
					NR_TDD_FR1_C	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-50
					NR_FDD_FR1_F	-118.5	-50
					NR_FDD_FR1_G, NR_TDD_FR1_G	-118	-50
					NR_FDD_FR1_H	-117.5	-50
10			≥ 132	≥ 1	Note 6	Note 6	Note 6
NOTE 1: Minimum PRS bandwidth, which is minimum of the PRS bandwidths of the reference resource and the measured neighbour resource i. NOTE 2: Minimum number of PRS resource repetitions among the reference resource and the measured neighbour resource i. $T_{\text{rep}}^{\text{PRS}}$, L_{PRS}, $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter <i>dl-PRS-ResourceRepetitionFactor</i>, <i>dl-PRS-NumSymbols</i> and <i>dl-PRS-CombSizeN</i> defined in TS 37.355 [34], respectively. NOTE 3: I_0 is assumed to have constant EPRE across the bandwidth. NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2. NOTE 5: T_c is the basic timing unit defined in TS 38.211 [6]. NOTE 6: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS. NOTE 7: Void							

Table 10.1.23.2-8: RSTD absolute accuracy in FR2 for AWGN channel with reduced number of samples

Accuracy	Conditions					
	PRS Ês/lot	PRS SCS	PRS bandwidth Note 1	PRS resource repetition ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} /$ $K_{\text{comb}}^{\text{PRS}}$) Note 2	Io ^{Note 3} range	
					Minimum Io	Maximum Io
Tc ^{Note 4}	dB	kHz	RB		dBm/SCS	dBm/BW _{Channel}
24	(PRS Ês/lot) _{ref} ≥ -3dB	60	≥ 64	≥ 1	Same value as PRS_RP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	Note 5
11			≥ 132	≥ 1	Note 5	Note 5
13	(PRS Ês/lot) _i ≥ -6dB	120	≥ 64	≥ 1	Same value as PRS_RP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	Note 5
6			≥ 128	≥ 1	Note 5	Note 5
NOTE 1: Minimum PRS bandwidth, which is minimum of the PRS bandwidths of the reference resource and the measured neighbour resource i.						
NOTE 2: Minimum number of PRS resource repetitions among the reference resource and the measured neighbour resource i. $T_{\text{rep}}^{\text{PRS}}$, L_{PRS} , $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter <i>dl-PRS-ResourceRepetitionFactor</i> , <i>dl-PRS-NumSymbols</i> and <i>dl-PRS-CombSizeN</i> defined in TS 37.355 [34], respectively.						

NOTE 3: I_0 is assumed to have constant EPRE across the bandwidth.
 NOTE 4: T_c is the basic timing unit defined in TS 38.211 [6].
 NOTE 5: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.
 NOTE 6: Void

10.1.23.3 Report mapping

10.1.23.3.1 Absolute DL RSTD Measurement Reporting

The reporting range for the DL RSTD measurement is defined from $-985024 \times T_c$ to $985024 \times T_c$ with the resolution step of $2^k \times T_c$, where

T_c is defined in TS 38.211 [6],

$$k_{min} \leq k \leq k_{max},$$

$k_{min}=2$ and $k_{max}=5$, when configured PRS resource of at least one of the reference cell and neighbor cell measured for the RSTD measurement is in FR1,

$k_{min}=0$ and $k_{max}=5$, when configured PRS resource of both the reference cell and neighbor cell measured for the RSTD measurement are in FR2,

$k \geq \text{timingReportingGranularityFactor}$ [34] configured by LMF via LPP for the RSTD measurement.

The measurement report mapping for different k values are specified in Tables 10.1.23.3.1-1 – 10.1.23.3.1-6.

Table 10.1.23.3.1-1: Report mapping for $k=0$

Reported Quantity Value, RSTD_i	Measured Quantity Value, RSTD	Unit
RSTD_0000000	RSTD < -985024	T_c
RSTD_0000001	$-985024 \leq \text{RSTD} < -985023$	T_c
RSTD_0000002	$-985023 \leq \text{RSTD} < -985022$	T_c
...	...	...
RSTD_0985024	$-1 \leq \text{RSTD} < 0$	T_c
RSTD_0985025	$0 \leq \text{RSTD} < 1$	T_c
...	...	...
RSTD_1970047	$985022 \leq \text{RSTD} < 985023$	T_c
RSTD_1970048	$985023 \leq \text{RSTD} < 985024$	T_c
RSTD_1970049	$985024 \leq \text{RSTD}$	T_c

Table 10.1.23.3.1-2: Report mapping for $k=1$

Reported Quantity Value, RSTD_i	Measured Quantity Value, RSTD	Unit
RSTD_0000000	RSTD < -985024	T_c
RSTD_0000001	$-985024 \leq \text{RSTD} < -985022$	T_c
RSTD_0000002	$-985022 \leq \text{RSTD} < -985020$	T_c
...	...	...
RSTD_492512	$-2 \leq \text{RSTD} < 0$	T_c
RSTD_492513	$0 \leq \text{RSTD} < 2$	T_c
...	...	...
RSTD_985023	$985020 \leq \text{RSTD} < 985022$	T_c
RSTD_985024	$985022 \leq \text{RSTD} < 985024$	T_c
RSTD_985025	$985024 \leq \text{RSTD}$	T_c

Table 10.1.23.3.1-3: Report mapping for $k=2$

Reported Quantity Value, RSTD_i	Measured Quantity Value, RSTD	Unit
------------------------------------	----------------------------------	------

RSTD_000000	$\text{RSTD} < -985024$	T_c
RSTD_000001	$-985024 \leq \text{RSTD} < -985020$	T_c
RSTD_000002	$-985020 \leq \text{RSTD} < -985016$	T_c
...	...	...
RSTD_246256	$-4 \leq \text{RSTD} < 0$	T_c
RSTD_246257	$0 \leq \text{RSTD} < 4$	T_c
...	...	...
RSTD_492511	$985016 \leq \text{RSTD} < 985020$	T_c
RSTD_492512	$985020 \leq \text{RSTD} < 985024$	T_c
RSTD_492513	$985024 \leq \text{RSTD}$	T_c

Table 10.1.23.3.1-4: Report mapping for $k=3$

Reported Quantity Value RSTD_i	Measured Quantity Value, RSTD	Unit
RSTD_000000	$\text{RSTD} < -985024$	T_c
RSTD_000001	$-985024 \leq \text{RSTD} < -985016$	T_c
RSTD_000002	$-985016 \leq \text{RSTD} < -985008$	T_c
...	...	...
RSTD_123128	$-8 \leq \text{RSTD} < 0$	T_c
RSTD_123129	$0 \leq \text{RSTD} < 8$	T_c
...	...	...
RSTD_246255	$985008 \leq \text{RSTD} < 985016$	T_c
RSTD_246256	$985016 \leq \text{RSTD} < 985024$	T_c
RSTD_246257	$985024 \leq \text{RSTD}$	T_c

Table 10.1.23.3.1-5: Report mapping for $k=4$

Reported Quantity Value, RSTD_i	Measured Quantity Value, RSTD	Unit
RSTD_000000	$\text{RSTD} < -985024$	T_c
RSTD_000001	$-985024 \leq \text{RSTD} < -985008$	T_c
RSTD_000002	$-985008 \leq \text{RSTD} < -984992$	T_c
...	...	...
RSTD_061564	$-16 \leq \text{RSTD} < 0$	T_c
RSTD_061565	$0 \leq \text{RSTD} < 16$	T_c
...	...	...
RSTD_123127	$984992 \leq \text{RSTD} < 985008$	T_c
RSTD_123128	$985008 \leq \text{RSTD} < 985024$	T_c
RSTD_123129	$985024 \leq \text{RSTD}$	T_c

Table 10.1.23.3.1-6: Report mapping for $k=5$

Reported Quantity Value, RSTD_i	Measured Quantity Value, RSTD	Unit
RSTD_000000	$\text{RSTD} < -985024$	T_c
RSTD_000001	$-985024 \leq \text{RSTD} < -984992$	T_c
RSTD_000002	$-984992 \leq \text{RSTD} < -984960$	T_c
...	...	...
RSTD_30782	$-32 \leq \text{RSTD} < 0$	T_c
RSTD_30783	$0 \leq \text{RSTD} < 32$	T_c
...	...	...
RSTD_61563	$984960 \leq \text{RSTD} < 984992$	T_c
RSTD_61564	$984992 \leq \text{RSTD} < 985024$	T_c
RSTD_61565	$985024 \leq \text{RSTD}$	T_c

10.1.23.3.2 Differential Reporting for DL RSTD Measurement

A first DL RSTD measurement is reported by means of differential reporting, i.e. as ΔRSTD , relative to a second DL RSTD measurement (RSTD2), provided that:

- the absolute measured quantity value of the second DL RSTD measurement (RSTD2) is not larger than the absolute measured quantity value of the first DL RSTD measurement (RSTD1), i.e., $\Delta\text{RSTD} = \text{RSTD1} - \text{RSTD2} \geq 0$, and
- the absolute value of the second DL RSTD measurement (RSTD2) is reported together with ΔRSTD for the first DL RSTD measurement.

The reporting range for differential reporting ΔRSTD of the first DL RSTD measurement is defined from 0 up to $8191 \times T_c$ with the resolution step of $2^k \times T_c$, where

T_c is defined in TS 38.211 [6],

$$k_{\min} \leq k \leq k_{\max},$$

$k_{\min} = [2]$ and $k_{\max} = 5$, when configured PRS resource of at least one of the reference cell and neighbor cell measured for the first RSTD measurement or second RSTD measurement is in FR1,

$k_{\min} = 0$ and $k_{\max} = 5$, when configured PRS resource of both the reference cell and neighbor cell measured for both of the first RSTD measurement and the second RSTD measurement are in FR2,

$k \geq \text{timingReportingGranularityFactor}$ [34] configured by LMF via LPP for the RSTD measurement.

The measurement report mapping for different k values are specified in Tables 10.1.23.3.2-1 – 10.1.23.3.2-6.

Table 10.1.23.3.2-1: Report mapping for $k=0$

Reported Quantity Value, DIFFRSTD_i	$\Delta\text{RSTD} = \text{RSTD1} - \text{RSTD2}$	Unit
DIFFRSTD_0000	$0 \leq \Delta\text{RSTD} < 1$	T_c
DIFFRSTD_0001	$1 \leq \Delta\text{RSTD} < 2$	T_c
DIFFRSTD_0002	$2 \leq \Delta\text{RSTD} < 3$	T_c
...	...	...
DIFFRSTD_8189	$8189 \leq \Delta\text{RSTD} < 8190$	T_c
DIFFRSTD_8190	$8190 \leq \Delta\text{RSTD} < 8191$	T_c
DIFFRSTD_8191	$8191 \leq \Delta\text{RSTD}$	T_c

Table 10.1.23.3.2-2: Report mapping for $k=1$

Reported Quantity Value, DIFFRSTD_i	$\Delta\text{RSTD} = \text{RSTD1} - \text{RSTD2}$	Unit
DIFFRSTD_0000	$0 \leq \Delta\text{RSTD} < 2$	T_c
DIFFRSTD_0001	$2 \leq \Delta\text{RSTD} < 4$	T_c
DIFFRSTD_0002	$4 \leq \Delta\text{RSTD} < 6$	T_c
...	...	...
DIFFRSTD_4093	$8186 \leq \Delta\text{RSTD} < 8188$	T_c
DIFFRSTD_4094	$8188 \leq \Delta\text{RSTD} < 8190$	T_c
DIFFRSTD_4095	$8190 \leq \Delta\text{RSTD}$	T_c

Table 10.1.23.3.2-3: Report mapping for $k=2$

Reported Quantity Value, DIFFRSTD_i	$\Delta\text{RSTD} = \text{RSTD1} - \text{RSTD2}$	Unit
DIFFRSTD_0000	$0 \leq \Delta\text{RSTD} < 4$	T_c
DIFFRSTD_0001	$4 \leq \Delta\text{RSTD} < 8$	T_c
DIFFRSTD_0002	$8 \leq \Delta\text{RSTD} < 12$	T_c
...	...	...
DIFFRSTD_2045	$8180 \leq \Delta\text{RSTD} < 8184$	T_c
DIFFRSTD_2046	$8184 \leq \Delta\text{RSTD} < 8188$	T_c

DIFFRSTD_2047	$8188 \leq \Delta\text{RSTD}$	T_c
---------------	-------------------------------	-------

Table 10.1.23.3.2-4: Report mapping for $k=3$

Reported Quantity Value, DIFFRSTD_i	$\Delta\text{RSTD} = \text{RSTD1} - \text{RSTD2}$	Unit
DIFFRSTD_0000	$0 \leq \Delta\text{RSTD} < 8$	T_c
DIFFRSTD_0001	$8 \leq \Delta\text{RSTD} < 16$	T_c
DIFFRSTD_0002	$16 \leq \Delta\text{RSTD} < 24$	T_c
...	...	...
DIFFRSTD_1021	$8168 \leq \Delta\text{RSTD} < 8176$	T_c
DIFFRSTD_1022	$8176 \leq \Delta\text{RSTD} < 8184$	T_c
DIFFRSTD_1023	$8184 \leq \Delta\text{RSTD}$	T_c

Table 10.1.23.3.2-5: Report mapping for $k=4$

Reported Quantity Value, DIFFRSTD_i	$\Delta\text{RSTD} = \text{RSTD1} - \text{RSTD2}$	Unit
DIFFRSTD_000	$0 \leq \Delta\text{RSTD} < 16$	T_c
DIFFRSTD_001	$16 \leq \Delta\text{RSTD} < 32$	T_c
DIFFRSTD_002	$32 \leq \Delta\text{RSTD} < 48$	T_c
...	...	...
DIFFRSTD_509	$8144 \leq \Delta\text{RSTD} < 8160$	T_c
DIFFRSTD_510	$8160 \leq \Delta\text{RSTD} < 8176$	T_c
DIFFRSTD_511	$8176 \leq \Delta\text{RSTD}$	T_c

Table 10.1.23.3.2-6: Report mapping for $k=5$

Reported Quantity Value, DIFFRSTD_i	$\Delta\text{RSTD} = \text{RSTD1} - \text{RSTD2}$	Unit
DIFFRSTD_000	$0 \leq \Delta\text{RSTD} < 32$	T_c
DIFFRSTD_001	$32 \leq \Delta\text{RSTD} < 64$	T_c
DIFFRSTD_002	$64 \leq \Delta\text{RSTD} < 96$	T_c
...	...	...
DIFFRSTD_253	$8096 \leq \Delta\text{RSTD} < 8128$	T_c
DIFFRSTD_254	$8128 \leq \Delta\text{RSTD} < 8160$	T_c
DIFFRSTD_255	$8160 \leq \Delta\text{RSTD}$	T_c

10.1.23.3.3 Additional Path Report Mapping for DL RSTD

The reporting range for the additional path reporting for an RSTD measurement is defined up to the range from $-8175 \times T_c$ to $8175 \times T_c$ with the resolution step of $2^k \times T_c$, where

T_c is defined in TS 38.211 [6],

$$k_{\min} \leq k \leq k_{\max},$$

$k_{\min}=2$ and $k_{\max}=5$, when configured PRS resource of at least one of the reference cell and neighbor cell measured for the RSTD measurement is in FR1,

$k_{\min}=0$ and $k_{\max}=5$, when configured PRS resource of both the reference cell and neighbor cell measured for the RSTD measurement are in FR2,

$k \geq \text{timingReportingGranularityFactor}$ [34] configured by LMF via LPP for the RSTD measurement.

The UE can report the timing of up to two additional paths with respect to the path timing determining the RSTD measurement.

A UE capable of *additionalPathsExtSupport-r17* can report the timing for a number additional paths, up to its capability, with respect to the path timing determining the RSTD measurement.

The report mappings for different k values are specified in Tables 10.1.23.3.3-1 – 10.1.23.3.3-6.

Table 10.1.23.3.3-1: Report mapping for $k=0$

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_00000	$\Delta\text{path} < -8175$	T_c
path_00001	$-8175 \leq \Delta\text{path} < -8174$	T_c
path_00002	$-8174 \leq \Delta\text{path} < -8173$	T_c
...	...	...
path_08175	$-1 \leq \Delta\text{path} < 0$	T_c
path_08176	$0 \leq \Delta\text{path} < 1$	T_c
...	...	...
path_16349	$8173 \leq \Delta\text{path} < 8174$	T_c
path_16350	$8174 \leq \Delta\text{path} < 8175$	T_c
path_16351	$8175 \leq \Delta\text{path}$	T_c

Table 10.1.23.3.3-2: Report mapping for $k=1$

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	$\Delta\text{path} < -8175$	T_c
path_0001	$-8175 \leq \Delta\text{path} < -8173$	T_c
path_0002	$-8173 \leq \Delta\text{path} < -8171$	T_c
...	...	...
path_4088	$-1 \leq \Delta\text{path} < 1$	T_c
...	...	...
path_8174	$8171 \leq \Delta\text{path} < 8173$	T_c
path_8175	$8173 \leq \Delta\text{path} < 8175$	T_c
path_8176	$8175 \leq \Delta\text{path}$	T_c

Table 10.1.23.3.3-3: Report mapping for $k=2$

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	$\Delta\text{path} < -8174$	T_c
path_0001	$-8174 \leq \Delta\text{path} < -8170$	T_c
path_0002	$-8170 \leq \Delta\text{path} < -8166$	T_c
...	...	...
path_2044	$-2 \leq \Delta\text{path} < 2$	T_c
...	...	...
path_4086	$8166 \leq \Delta\text{path} < 8170$	T_c
path_4087	$8170 \leq \Delta\text{path} < 8174$	T_c
path_4088	$8174 \leq \Delta\text{path}$	T_c

Table 10.1.23.3.3-4: Report mapping for $k=3$

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	$\Delta\text{path} < -8172$	T_c
path_0001	$-8172 \leq \Delta\text{path} < -8164$	T_c
path_0002	$-8164 \leq \Delta\text{path} < -8156$	T_c
...	...	...
path_1022	$-4 \leq \Delta\text{path} < 4$	T_c
...	...	...
path_2042	$8156 \leq \Delta\text{path} < 8164$	T_c
path_2043	$8164 \leq \Delta\text{path} < 8172$	T_c

path_2044	$8172 \leq \Delta\text{path}$	T_c
-----------	-------------------------------	-------

Table 10.1.23.3.3-5: Report mapping for $k=4$

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	$\Delta\text{path} < -8168$	T_c
path_0001	$-8168 \leq \Delta\text{path} < -8152$	T_c
path_0002	$-8152 \leq \Delta\text{path} < -8136$	T_c
...	...	...
path_511	$-8 \leq \Delta\text{path} < 8$	T_c
...	...	...
path_1020	$8136 \leq \Delta\text{path} < 8152$	T_c
path_1021	$8152 \leq \Delta\text{path} < 8168$	T_c
path_1022	$8168 \leq \Delta\text{path}$	T_c

Table 10.1.23.3.3-6: Report mapping for $k=5$

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_000	$\Delta\text{path} < -8160$	T_c
path_001	$-8160 \leq \Delta\text{path} < -8128$	T_c
path_002	$-8128 \leq \Delta\text{path} < -8096$	T_c
...	...	...
path_256	$0 \leq \Delta\text{path} < 32$	T_c
...	...	...
path_509	$8096 \leq \Delta\text{path} < 8128$	T_c
path_510	$8128 \leq \Delta\text{path} < 8160$	T_c
path_511	$8160 \leq \Delta\text{path}$	T_c

10.1.24 PRS-RSRP Measurements

10.1.24.1 Introduction

The requirements in Clause 10.1.24 shall apply, provided the UE has received *nr-DL-TDOA-RequestLocationInformation* or *nr-Multi-RTT-RequestLocationInformation* or *nr-DL-AoD-RequestLocationInformation* message from LMF via LPP [34] requesting the UE to report one or more DL PRS-RSRP measurements defined in TS 38.215 [4].

The requirements in clause 10.1.24 apply for UE in RRC_CONNECTED, including PRS-RSRP measurement with MG and outside MG, as well as for UE in RRC_INACTIVE. For PRS-RSRP measurement in FR2, the requirements apply with and without reduced Rx beam sweeping factor.

10.1.24.2 Measurement Accuracy Requirements

10.1.24.2.1 Absolute PRS RSRP accuracy

The absolute accuracy requirements for PRS-RSRP measurement for FR1 defined in Table 10.1.24.2.1-1 are valid under the following conditions:

- Conditions defined in 38.101-1 Clause 7.3 for reference sensitivity are fulfilled.
- PRP $1,2_{\text{dBm}}$ according to Annex B.2.14 for a corresponding Band
- UE does not support positioning measurements with reduced number of samples, or LMF does not indicate UE to perform positioning measurements with reduced number of samples

The absolute accuracy requirements for PRS-RSRP measurement for FR2 defined in Table 10.1.24.2.1-2 are valid under the following conditions:

- Conditions defined in 38.101-2 Clause 7.3 for reference sensitivity are fulfilled.
- PRP 1,2_{dBm} according to Annex B.2.14 for a corresponding Band
- UE does not support positioning measurements with reduced number of samples, or LMF does not indicate UE to perform positioning measurements with reduced number of samples

Table 10.1.24.2.1-1: PRS-RSRP absolute accuracy for FR1

Accuracy		Conditions							
Normal condition	Extreme condition	PRS Es/lot	PRS BW	Repetition factor ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$)	Io ^{Note 7} range				
					NR operating band groups Note 8	Minimum Io ^{Note 1} dBm / SCS _{PRS}			Maximum Io
dB	dB	dB	PRB	-		dBm / SCS _{PRS}			dBm/BW _{Channel}
						dBm/15kHz Note 6	dBm/30kHz Note 6	dBm/60kHz Note 6	
±3.5	±8	≥-3dB	≥24	All	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	-121	-50
					NR_FDD_FR1_B	-126.5	-123.5	-120.5	-50
					NR_TDD_FR1_C	-126	-123	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	-119	-50
					NR_FDD_FR1_F	-124.5	-121.5	-118.5	-50
					NR_FDD_FR1_G, NR_TDD_FR1_G	-124	-121	-118	-50
					NR_FDD_FR1_H	-123.5	-120.5	-117.5	-50
					Note 4				
					Note 4				
±8.5	±13	≥-13dB	24 ≤ BW ≤ 52	All	Note 4				
±6	±10.5		52 < BW ≤ 104	All	Note 4				
±4.5	±9		BW > 104	All	Note 4				

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.

NOTE 2: Void.

NOTE 3: PRS bandwidth is as indicated in *prs-Bandwidth* in the OTDOA or DL-AoD assistance data defined in [34].

NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 24 RB.

NOTE 5: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.

NOTE 6: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.

NOTE 7: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe.

NOTE 8: NR operating band groups are as defined in Section 3.5.2.

Table 10.1.24.2.1-2: PRS-RSRP absolute accuracy for FR2

Accuracy		Conditions					
Normal condition	Extreme condition	PRS Ês/lot	PRS BW	Repetition factor ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$)	Io ^{Note 7} range		
					Minimum Io ^{Note 1} dBm / SCS _{PRS}		Maximum Io
dB	dB	dB	PRB	-	dBm / SCS _{PRS}		dBm/BW _{Channel}
					dBm/120kHz _{z ^{Note 6}}	dBm/60kHz _{Note 6}	
±5	±8	≥-3dB	≥24	All	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival		-50
					Note 4		
					Note 4		
±8.5	±11.5	≥-13dB	24 ≤ BW ≤ 64	All	Note 4		
±6	±9		BW >64	All	Note 4		
NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.							
NOTE 2: Void.							
NOTE 3: PRS bandwidth is as indicated in <i>prs-Bandwidth</i> in the OTDOA or DL-AoD assistance data defined in [34].							
NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 24 RB.							
NOTE 5: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.							
NOTE 6: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.							
NOTE 7: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe.							
NOTE 8: NR operating band groups are as defined in Section 3.5.2.							

The absolute accuracy requirements for PRS-RSRP measurement for FR1 defined in Table 10.1.24.2.1-3 are valid under the following conditions:

- Conditions defined in 38.101-1 Clause 7.3 for reference sensitivity are fulfilled.
- PRP $1,2|_{\text{dBm}}$ according to Annex B.2.14 for a corresponding Band
- UE supports positioning measurements with reduced number of samples, and LMF indicates UE to perform positioning measurements with reduced number of samples
- AWGN channel

The absolute accuracy requirements for PRS-RSRP measurement for FR2 defined in Table 10.1.24.2.1-4 are valid under the following conditions:

- Conditions defined in 38.101-2 Clause 7.3 for reference sensitivity are fulfilled.
- PRP $1,2|_{\text{dBm}}$ according to Annex B.2.14 for a corresponding Band
- UE supports positioning measurements with reduced number of samples, and LMF indicates UE to perform positioning measurements with reduced number of samples
- AWGN channel

Table 10.1.24.2.1-3: PRS-RSRP absolute accuracy for FR1 with reduced sample number

Accuracy		Conditions		
		PRS BW	Io ^{Note 6} range	

Normal condition	Extreme condition	PRS Es/lot		Repetition factor ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$)	NR operating band groups Note 7	Minimum I_o ^{Note 1} dBm / SCS _{PRS}			Maximum I_o
dB	dB	dB	PRB	-		dBm / SCS _{PRS}			dBm/BW _{Channel}
						dBm/15kHz Note 5	dBm/30kHz Note 5	dBm/60kHz Note 5	
±3.5	±8	≥0	≥48	All	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	-121	-50
					NR_FDD_FR1_B	-126.5	-123.5	-120.5	-50
					NR_TDD_FR1_C	-126	-123	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	-119	-50
					NR_FDD_FR1_F	-124.5	-121.5	-118.5	-50
					NR_FDD_FR1_G, NR_TDD_FR1_G	-124	-121	-118	-50
					NR_FDD_FR1_H	-123.5	-120.5	-117.5	-50
±8.5	±13	≥-6	48 ≤ BW ≤ 52	All	Note 3				
±6	±10.5		52 < BW ≤ 104	All	Note 3				
±4.5	±9		BW > 104	All	Note 3				
NOTE 1: This minimum I_o condition is expressed as the average I_o per RE over all REs in an OFDM symbol. NOTE 2: PRS bandwidth is as indicated in <i>prs-Bandwidth</i> in the OTDOA or DL-AoD assistance data defined in [34]. NOTE 3: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 48 RB. NOTE 4: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency. NOTE 5: The condition level is increased by $\Delta > 0$, when applicable, as described in Sections B.3.2 and B.3.3. NOTE 6: The I_o is defined in PRS positioning subframes. The same I_o range applies to PRS and non-PRS symbols. I_o levels are different in PRS and non-PRS symbols within the same subframe. NOTE 7: NR operating band groups are as defined in Section 3.5.2.									

Table 10.1.24.2.1-4: PRS-RSRP absolute accuracy for FR2 with reduced sample number

Accuracy		Conditions					
Normal condition	Extreme condition	PRS Es/Iot	PRS BW	Repetition factor ($T_{rep}^{PRS} * L_{PRS}/K_{comb}^{PRS}$)	Io ^{Note 6} range		
					Minimum Io ^{Note 1} dBm / SCS _{PRS}		Maximum Io
dB	dB	dB	PRB	-	dBm / SCS _{PRS}		dBm/BW _{Channel}
					dBm/120kHz _{z ^{Note 5}}	dBm/60kHz _{^{Note 5}}	
±5	±8	≥0	≥48	All	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival		-50
±8.5	±11.5	≥-6	48 ≤ BW ≤ 64	All	Note 3		
±6	±9		BW >64	All	Note 3		
NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.							
NOTE 2: PRS bandwidth is as indicated in <i>prs-Bandwidth</i> in the OTDOA or DL-AoD assistance data defined in [34].							
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 48 RB.							
NOTE 4: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.							
NOTE 5: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.							
NOTE 6: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe.							
NOTE 7: NR operating band groups are as defined in Section 3.5.2.							

10.1.24.2.2 Relative PRS RSRP accuracy

The relative accuracy of PRS-RSRP is defined as accuracy of the difference between two PRS-RSRP measurements.

The relative PRS-RSRP accuracy requirements apply for the cases when PRS-RSRP is measured from PRS resources in the same PRS resource set in FR1 or FR2, and measured with same Rx beam in case of FR2.

The accuracy requirements for PRS-RSRP measurement for FR1 defined in Table 10.1.24.2.2-1 are valid under the following conditions:

- Conditions defined in 38.101-1 Clause 7.3 for reference sensitivity are fulfilled.
- PRP $1,2|_{\text{dBm}}$ according to Annex B.2.14 for a corresponding Band
- UE does not support positioning measurements with reduced number of samples, or LMF does not indicate UE to perform positioning measurements with reduced number of samples

The accuracy requirements for PRS-RSRP measurement for FR2 defined in Table 10.1.24.2.2-2 are valid under the following conditions:

- Conditions defined in 38.101-2 Clause 7.3 for reference sensitivity are fulfilled.
- PRP $1,2|_{\text{dBm}}$ according to Annex B.2.14 for a corresponding Band
- UE does not support positioning measurements with reduced number of samples, or LMF does not indicate UE to perform positioning measurements with reduced number of samples

Table 10.1.24.2.2-1: PRS-RSRP relative accuracy for FR1

Accuracy		Conditions							
Normal condition	Extreme condition	PRS Es/Iot	PRS BW	Repetition factor ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$)	Io ^{Note 7} range				
					NR operating band groups Note 8	Minimum Io ^{Note 1} dBm / SCS _{PRS}			Maximum Io
						dBm / SCS _{PRS}			
dB	dB	dB	PRB	-		dBm/15k Hz ^{Note 6}	dBm/30k Hz ^{Note 6}	dBm/60kHz ^{Note 6}	dBm/BW _{Channel}
[±3.5]	±5.0	≥-3dB	≥24	All	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	-121	-50
					NR_FDD_FR1_B	-126.5	-123.5	-120.5	-50
					NR_TDD_FR1_C	-126	-123	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	-119	-50
					NR_FDD_FR1_F	-124.5	-121.5	-118.5	-50
					NR_FDD_FR1_G, NR_TDD_FR1_G	-124	-121	-118	-50

					NR_FDD_FR1_H	-123.5	-120.5	-117.5	-50
					Note 4				
					Note 4				
±9.5	±11.0	≥-13dB	24 ≤ BW ≤ 52	All	Note 4				
±6.5	±8.0		52< BW≤ 104	All	Note 4				
±5.0	±6.5		BW >104	All	Note 4				
NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.									
NOTE 2: Void.									
NOTE 3: PRS bandwidth is as indicated in <i>prs-Bandwidth</i> in the OTDOA or DL-AoD assistance data defined in [34].									
NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 24 RB.									
NOTE 5: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.									
NOTE 6: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.									
NOTE 7: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe.									
NOTE 8: NR operating band groups are as defined in Section 3.5.2.									

Table 10.1.24.2.2-2: PRS-RSRP relative accuracy for FR2

Accuracy		Conditions					
Normal condition	Extreme condition	PRS $\hat{E}_s/I_o$	PRS BW	Repetition factor ($T_{rep}^{PRS} * L_{PRS}/K_{comb}^{PRS}$)	I_o ^{Note 7} range		
					Minimum I_o ^{Note 1} dBm / SCS_{PRS}		Maximum I_o
					dBm / SCS_{PRS}		
dB	dB	dB	PRB	-	dBm / SCS_{PRS}		$dBm/BW_{Channel}$
					dBm/120kHz _{z ^{Note 6}}	dBm/60kHz ^{Note 6}	
± 5.0	± 8.0	$\geq -3dB$	≥ 24	All	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival		-50
					Note 4		
					Note 4		
± 10	± 13	$\geq -13dB$	$24 \leq BW \leq 64$	All	Note 4		
± 7.5	± 10.5		$BW > 64$	All	Note 4		
NOTE 1: This minimum I_o condition is expressed as the average I_o per RE over all REs in an OFDM symbol.							
NOTE 2: Void.							
NOTE 3: PRS bandwidth is as indicated in <i>prs-Bandwidth</i> in the OTDOA or DL-AoD assistance data defined in [34].							
NOTE 4: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 24 RB.							
NOTE 5: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.							
NOTE 6: The condition level is increased by $\Delta > 0$, when applicable, as described in Sections B.3.2 and B.3.3.							
NOTE 7: The I_o is defined in PRS positioning subframes. The same I_o range applies to PRS and non-PRS symbols. I_o levels are different in PRS and non-PRS symbols within the same subframe.							
NOTE 8: NR operating band groups are as defined in Section 3.5.2.							

The absolute accuracy requirements for PRS-RSRP measurement for FR1 defined in Table 10.1.24.2.2-3 are valid under the following conditions:

- Conditions defined in 38.101-1 Clause 7.3 for reference sensitivity are fulfilled.
- PRP 1,2_{dBm} according to Annex B.2.14 for a corresponding Band
- UE supports positioning measurements with reduced number of samples, and LMF indicates UE to perform positioning measurements with reduced number of samples

- AWGN channel

The absolute accuracy requirements for PRS-RSRP measurement for FR2 defined in Table 10.1.24.2.2-4 are valid under the following conditions:

- Conditions defined in 38.101-2 Clause 7.3 for reference sensitivity are fulfilled.
- PRP $1,2_{dBm}$ according to Annex B.2.14 for a corresponding Band
- UE supports positioning measurements with reduced number of samples, and LMF indicates UE to perform positioning measurements with reduced number of samples
- AWGN channel

Table 10.1.24.2.2-3: PRS-RSRP relative accuracy for FR1 with reduced sample number

Accuracy		Conditions							
Normal condition	Extreme condition	PRS $\hat{E}_s/\text{lot}$	PRS BW	Repetition factor ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$)	Io ^{Note 6} range				
					NR operating band groups ^{Note 7}	Minimum Io ^{Note 1} dBm / SCS _{PRS}			Maximum Io
dB	dB	dB	PRB	-		dBm / SCS _{PRS}			dBm/BW _{Channel}
						dBm/15k Hz ^{Note 5}	dBm/30kHz ^{Note 5}	dBm/60k Hz ^{Note 5}	
[±3.5]	±5.0	≥0	≥48	All	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	-121	-50
					NR_FDD_FR1_B	-126.5	-123.5	-120.5	-50
					NR_TDD_FR1_C	-126	-123	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	-119	-50
					NR_FDD_FR1_F	-124.5	-121.5	-118.5	-50
					NR_FDD_FR1_G, NR_TDD_FR1_G	-124	-121	-118	-50
					NR_FDD_FR1_H	-123.5	-120.5	-117.5	-50
±9.5	±11.0	≥-6	48 ≤ BW ≤ 52	All	Note 3				
±6.5	±8.0		52 < BW ≤ 104	All	Note 3				
±5.0	±6.5		BW >104	All	Note 3				
NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol. NOTE 2: PRS bandwidth is as indicated in <i>prs-Bandwidth</i> in the OTDOA or DL-AoD assistance data defined in [34]. NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 48 RB. NOTE 4: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency. NOTE 5: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3. NOTE 6: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe. NOTE 7: NR operating band groups are as defined in Section 3.5.2.									

Table 10.1.24.2.2-4: PRS-RSRP relative accuracy for FR2 with reduced sample number

Accuracy		Conditions				
Normal condition	Extreme condition	PRS $\hat{E}_s/\text{lot}$	PRS BW	Repetition factor ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$)	Io Note 6 range	
					Minimum Io Note 1 dBm / SCS _{PRS}	Maximum Io
dB	dB	dB	PRB	-	dBm / SCS _{PRS}	

					dBm/120kHz z Note 5	dBm/60kHz Note 5	dBm/BW _{Chan nel}	
± 5.0	± 8.0	≥ 0	≥ 48	All	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival		-50	
± 10	± 13	≥ -6	$48 \leq \text{BW} \leq 64$	All				Note 3
± 7.5	± 10.5		$\text{BW} > 64$	All				Note 3
NOTE 1: This minimum l_0 condition is expressed as the average l_0 per RE over all REs in an OFDM symbol. NOTE 2: PRS bandwidth is as indicated in <i>prs-Bandwidth</i> in the OTDOA or DL-AoD assistance data defined in [34]. NOTE 3: The same bands and the same l_0 conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 24 RB. NOTE 4: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency. NOTE 5: The condition level is increased by $\Delta > 0$, when applicable, as described in Sections B.3.2 and B.3.3. NOTE 6: The l_0 is defined in PRS positioning subframes. The same l_0 range applies to PRS and non-PRS symbols. l_0 levels are different in PRS and non-PRS symbols within the same subframe. NOTE 8: NR operating band groups are as defined in Section 3.5.2.								

10.1.24.3 Report mapping

10.1.24.3.1 Absolute PRS-RSRP Measurement Report Mapping

The reporting range of absolute PRS-RSRP measurement is defined from -156 dBm to -31 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 10.1.24.3.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 10.1.24.3.1-1: Measurement report mapping for PRS-RSRP

Reported value	Measured quantity value	Unit
PRS_RSRP_0	PRS-RSRP<-156	dBm
PRS_RSRP_1	-156≤PRS-RSRP<-155	dBm
PRS_RSRP_2	-155≤PRS-RSRP<-154	dBm
PRS_RSRP_3	-154≤PRS-RSRP<-153	dBm
PRS_RSRP_4	-153≤PRS-RSRP<-152	dBm
PRS_RSRP_5	-152≤PRS-RSRP<-151	dBm
PRS_RSRP_6	-151≤PRS-RSRP<-150	dBm
PRS_RSRP_7	-150≤PRS-RSRP<-149	dBm
PRS_RSRP_8	-149≤PRS-RSRP<-148	dBm
PRS_RSRP_9	-148≤PRS-RSRP<-147	dBm
PRS_RSRP_10	-147≤PRS-RSRP<-146	dBm
PRS_RSRP_11	-146≤PRS-RSRP<-145	dBm
PRS_RSRP_12	-145≤PRS-RSRP<-144	dBm
PRS_RSRP_13	-144≤PRS-RSRP<-143	dBm
PRS_RSRP_14	-143≤PRS-RSRP<-142	dBm
PRS_RSRP_15	-142≤PRS-RSRP<-141	dBm
PRS_RSRP_16	-141≤PRS-RSRP<-140	dBm
PRS_RSRP_17	-140≤PRS-RSRP<-139	dBm
PRS_RSRP_18	-139≤PRS-RSRP<-138	dBm
...	...	...
PRS_RSRP_111	-46≤PRS-RSRP<-45	dBm
PRS_RSRP_112	-45≤PRS-RSRP<-44	dBm
PRS_RSRP_113	-44≤PRS-RSRP<-43	dBm
PRS_RSRP_114	-43≤PRS-RSRP<-42	dBm
PRS_RSRP_115	-42≤PRS-RSRP<-41	dBm
PRS_RSRP_116	-41≤PRS-RSRP<-40	dBm
PRS_RSRP_117	-40≤PRS-RSRP<-39	dBm
PRS_RSRP_118	-39≤PRS-RSRP<-38	dBm
PRS_RSRP_119	-38≤PRS-RSRP<-37	dBm
PRS_RSRP_120	-37≤PRS-RSRP<-36	dBm
PRS_RSRP_121	-36≤PRS-RSRP<-35	dBm
PRS_RSRP_122	-35≤PRS-RSRP<-34	dBm
PRS_RSRP_123	-34≤PRS-RSRP<-33	dBm
PRS_RSRP_124	-33≤PRS-RSRP<-32	dBm

PRS_RSRP_125	$-32 \leq \text{PRS-RSRP} < -31$	dBm
PRS_RSRP_126	$-31 \leq \text{PRS-RSRP}$	dBm

10.1.24.3.2 Differential Report Mapping for PRS-RSRP Measurement

The reporting range of differential PRS-RSRP is defined from -30 dB to 0 dB with 1 dB resolution when *nr-DL-AoD-RequestLocationInformation* message is received.

The mapping of measured quantity is defined in Table 10.1.24.3.2-1. The range in the signalling may be larger than the guaranteed accuracy range.

The reporting range of differential PRS-RSRP is defined from -30 dB to 30 dB with 1 dB resolution when *nr-DL-TDOA-RequestLocationInformation* or *nr-Multi-RTT-RequestLocationInformation* is received.

The mapping of measured quantity is defined in Table 10.1.24.3.2-2. The range in the signalling may be larger than the guaranteed accuracy range or the range supported by the UE receiver for differential RSRP measured on different PRS resources in frequency domain at the same time.

Table 10.1.24.3.2-1: Measurement report mapping for differential PRS-RSRP

Reported value	Measured quantity value	Unit
DIFFRSRP_0	$-30 \geq \Delta \text{RSRP}$	dB
DIFFRSRP_1	$-29 \geq \Delta \text{RSRP} > -30$	dB
DIFFRSRP_2	$-28 \geq \Delta \text{RSRP} > -29$	dB
DIFFRSRP_3	$-27 \geq \Delta \text{RSRP} > -28$	dB
DIFFRSRP_4	$-26 \geq \Delta \text{RSRP} > -27$	dB
DIFFRSRP_5	$-25 \geq \Delta \text{RSRP} > -26$	dB
DIFFRSRP_6	$-24 \geq \Delta \text{RSRP} > -25$	dB
DIFFRSRP_7	$-23 \geq \Delta \text{RSRP} > -24$	dB
DIFFRSRP_8	$-22 \geq \Delta \text{RSRP} > -23$	dB
DIFFRSRP_9	$-21 \geq \Delta \text{RSRP} > -22$	dB
DIFFRSRP_10	$-20 \geq \Delta \text{RSRP} > -21$	dB
DIFFRSRP_11	$-19 \geq \Delta \text{RSRP} > -20$	dB
DIFFRSRP_12	$-18 \geq \Delta \text{RSRP} > -19$	dB
DIFFRSRP_13	$-17 \geq \Delta \text{RSRP} > -18$	dB
DIFFRSRP_14	$-16 \geq \Delta \text{RSRP} > -17$	dB
DIFFRSRP_15	$-15 \geq \Delta \text{RSRP} > -16$	dB
DIFFRSRP_16	$-14 \geq \Delta \text{RSRP} > -15$	dB
DIFFRSRP_17	$-13 \geq \Delta \text{RSRP} > -14$	dB
DIFFRSRP_18	$-12 \geq \Delta \text{RSRP} > -13$	dB
DIFFRSRP_19	$-11 \geq \Delta \text{RSRP} > -12$	dB
DIFFRSRP_20	$-10 \geq \Delta \text{RSRP} > -11$	dB
DIFFRSRP_21	$-9 \geq \Delta \text{RSRP} > -10$	dB
DIFFRSRP_22	$-8 \geq \Delta \text{RSRP} > -9$	dB
DIFFRSRP_23	$-7 \geq \Delta \text{RSRP} > -8$	dB
DIFFRSRP_24	$-6 \geq \Delta \text{RSRP} > -7$	dB
DIFFRSRP_25	$-5 \geq \Delta \text{RSRP} > -6$	dB
DIFFRSRP_26	$-4 \geq \Delta \text{RSRP} > -5$	dB
DIFFRSRP_27	$-3 \geq \Delta \text{RSRP} > -4$	dB
DIFFRSRP_28	$-2 \geq \Delta \text{RSRP} > -3$	dB
DIFFRSRP_29	$-1 \geq \Delta \text{RSRP} > -2$	dB
DIFFRSRP_30	$0 \geq \Delta \text{RSRP} > -1$	dB

Table 10.1.24.3.2-2: Measurement report mapping for differential PRS-RSRP

Reported value	Measured quantity value	Unit
DIFFRSRP_0	$-30 \geq \Delta \text{RSRP}$	dB
DIFFRSRP_1	$-29 \geq \Delta \text{RSRP} > -30$	dB
DIFFRSRP_2	$-28 \geq \Delta \text{RSRP} > -29$	dB
DIFFRSRP_3	$-27 \geq \Delta \text{RSRP} > -28$	dB
DIFFRSRP_4	$-26 \geq \Delta \text{RSRP} > -27$	dB
DIFFRSRP_5	$-25 \geq \Delta \text{RSRP} > -26$	dB
DIFFRSRP_6	$-24 \geq \Delta \text{RSRP} > -25$	dB

DIFFRSRP_7	$-23 \geq \Delta \text{RSRP} > -24$	dB
DIFFRSRP_8	$-22 \geq \Delta \text{RSRP} > -23$	dB
DIFFRSRP_9	$-21 \geq \Delta \text{RSRP} > -22$	dB
DIFFRSRP_10	$-20 \geq \Delta \text{RSRP} > -21$	dB
DIFFRSRP_11	$-19 \geq \Delta \text{RSRP} > -20$	dB
DIFFRSRP_12	$-18 \geq \Delta \text{RSRP} > -19$	dB
DIFFRSRP_13	$-17 \geq \Delta \text{RSRP} > -18$	dB
DIFFRSRP_14	$-16 \geq \Delta \text{RSRP} > -17$	dB
...	...	...
DIFFRSRP_25	$-5 \geq \Delta \text{RSRP} > -6$	dB
DIFFRSRP_26	$-4 \geq \Delta \text{RSRP} > -5$	dB
DIFFRSRP_27	$-3 \geq \Delta \text{RSRP} > -4$	dB
DIFFRSRP_28	$-2 \geq \Delta \text{RSRP} > -3$	dB
DIFFRSRP_29	$-1 \geq \Delta \text{RSRP} > -2$	dB
DIFFRSRP_30	$0 \geq \Delta \text{RSRP} > -1$	dB
DIFFRSRP_31	$1 \geq \Delta \text{RSRP} > 0$	dB
DIFFRSRP_32	$2 \geq \Delta \text{RSRP} > 1$	dB
DIFFRSRP_33	$3 \geq \Delta \text{RSRP} > 2$	dB
DIFFRSRP_34	$4 \geq \Delta \text{RSRP} > 3$	dB
DIFFRSRP_35	$5 \geq \Delta \text{RSRP} > 4$	dB
DIFFRSRP_36	$6 \geq \Delta \text{RSRP} > 5$	dB
...	...	...
DIFFRSRP_47	$17 \geq \Delta \text{RSRP} > 16$	dB
DIFFRSRP_48	$18 \geq \Delta \text{RSRP} > 17$	dB
DIFFRSRP_49	$19 \geq \Delta \text{RSRP} > 18$	dB
DIFFRSRP_50	$20 \geq \Delta \text{RSRP} > 19$	dB
DIFFRSRP_51	$21 \geq \Delta \text{RSRP} > 20$	dB
DIFFRSRP_52	$22 \geq \Delta \text{RSRP} > 21$	dB
DIFFRSRP_53	$23 \geq \Delta \text{RSRP} > 22$	dB
DIFFRSRP_54	$24 \geq \Delta \text{RSRP} > 23$	dB
DIFFRSRP_55	$25 \geq \Delta \text{RSRP} > 24$	dB
DIFFRSRP_56	$26 \geq \Delta \text{RSRP} > 25$	dB
DIFFRSRP_57	$27 \geq \Delta \text{RSRP} > 26$	dB
DIFFRSRP_58	$28 \geq \Delta \text{RSRP} > 27$	dB
DIFFRSRP_59	$29 \geq \Delta \text{RSRP} > 28$	dB
DIFFRSRP_60	$30 \geq \Delta \text{RSRP} > 29$	dB
DIFFRSRP_61	$\Delta \text{RSRP} > 30$	dB

10.1.25 UE Rx-Tx Time Difference Measurements

10.1.25.1 Introduction

The requirements in Clause 10.1.25 shall apply, provided the UE has received *nr-Multi-RTT-RequestLocationInformation* message from LMF via LPP [31] requesting the UE to report one or more UE Rx-Tx time difference measurements defined in TS 38.215 [4]. The requirements in Clause 10.1.25 shall apply:

- when UE is in RRC_CONNECTED state and the measurement is performed with MG or without MG,
- when UE is in RRC_INACTIVE state.

10.1.25.2 Measurement Accuracy Requirements

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall not apply, if:

$N_{\text{TA_offset}}$ defined in Table 7.1.2-2 changes during the UE Rx-Tx measurement period or

if the uplink transmission timing changes during the UE Rx-Tx measurement period due to the network-configured Timing Advance.

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that:

- The UE transmits SRS within [-160, 160] msec of at least one DL PRS resource of each of the TRPs in the assistance data.

If the uplink transmission timing changes during the UE Rx-Tx measurement period due to the autonomous timing adjustment defined in clause 7.1.2 then:

- UE Rx-Tx measurement accuracy requirements shall apply for a cell, which is also the downlink reference cell (defined in section 7.1.1) for SRS transmission even if the uplink transmission timing changes during the UE Rx-Tx measurement period due to autonomous adjustment.
- UE Rx-Tx measurement accuracy requirements shall not apply for a cell, which is not the downlink reference cell (defined in section 7.1.1) for SRS transmission, if the uplink transmission timing changes during the UE Rx-Tx measurement period due to autonomous adjustment.

When a serving cell change occurs during the UE Rx-Tx measurement period, the UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that the serving cell change does not impact SRS configuration for the UE Rx-Tx measurement.

The relative accuracy of UE Rx-Tx measurement in this clause is defined as accuracy of the difference between two UE Rx-Tx measurements.

The accuracy requirements in Table 10.1.25.2-1 for FR1 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex B.2.14 for a corresponding Band.

AWGN propagation condition.

Table 10.1.25.2-1: UE Rx-Tx time difference measurement accuracy in FR1 in AWGN

Accuracy	Conditions						
	PRS Ês/lot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition ($T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS}$) Note 3	NR operating band groups ^{Note 2}	Io ^{Note 4} range	
						Minimum Io ^{Note 1}	Maximum Io
T _c ^{Note 5}	dB	RB	kHz			dBm / SCS _{PRS}	dBm/BW
± 78+δ	-3	≥24	15	≥4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-50
					NR_FDD_FR1_B	-126.5	
					NR_TDD_FR1_C	-126	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	
					NR_FDD_FR1_F	-124.5	
					NR_FDD_FR1_G, NR_TDD_FR1_G	-124	
					NR_FDD_FR1_H	-123.5	
± 59+δ		≥52		≥1	Note 6	NOTE 6	NOTE 6
± 30+δ		>104		≥1	Note 6	NOTE 6	NOTE 6
± 57+δ		≥24	30	≥4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-50
					NR_FDD_FR1_B	-123.5	
					NR_TDD_FR1_C	-123	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-122	
					NR_FDD_FR1_F	-121.5	
NR_FDD_FR1_G, NR_TDD_FR1_G	-121						

				NR_FDD_FR1_H	-120.5		
$\pm 30+\delta$		≥ 48	≥ 1	NOTE 6	NOTE 6	NOTE 6	
$\pm 15+\delta$		≥ 132	≥ 1	NOTE 6	NOTE 6	NOTE 6	
$\pm 29+\delta$	≥ 24	60	≥ 4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50	
				NR_FDD_FR1_B	-120.5		
				NR_TDD_FR1_C	-120		
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5		
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119		
				NR_FDD_FR1_F	-118.5		
				NR_FDD_FR1_G, NR_TDD_FR1_G	-118		
				NR_FDD_FR1_H	-117.5		
$\pm 15+\delta$	≥ 64		≥ 1	NOTE 6	NOTE 6	NOTE 6	
$\pm 7+\delta$	≥ 132		≥ 1	NOTE 6	NOTE 6	NOTE 6	
-13	≥ 24	15	≥ 4	NOTE 6	NOTE 6	NOTE 6	
	≥ 52		≥ 1	NOTE 6	NOTE 6	NOTE 6	
	>104		≥ 1	NOTE 6	NOTE 6	NOTE 6	
	$\pm 58+\delta$	≥ 24	30	≥ 4	NOTE 6	NOTE 6	NOTE 6
	$\pm 39+\delta$	≥ 48	60	≥ 1	NOTE 6	NOTE 6	NOTE 6
	$\pm 16+\delta$	≥ 132		≥ 1	NOTE 6	NOTE 6	NOTE 6
	$\pm 36+\delta$	≥ 24		≥ 4	NOTE 6	NOTE 6	NOTE 6
	$\pm 16+\delta$	≥ 64		≥ 1	NOTE 6	NOTE 6	NOTE 6
	$\pm 8+\delta$	≥ 132		≥ 1	NOTE 6	NOTE 6	NOTE 6
	NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol. NOTE 2: NR operating band groups are as defined in Section 3.5. NOTE 3: $T_{\text{rep}}^{\text{PRS}}, L_{\text{PRS}}, K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter <i>dl-PRS-ResourceRepetitionFactor</i> , <i>dl-PRS-NumSymbols</i> and <i>dl-PRS-CombSizeN</i> defined in TS 37.355 [34]. NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot. NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6]. NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS. NOTE 7: δ is the margin determined from Table 10.1.25.2-5.						

The accuracy requirements in Table 10.1.25.2-1a for FR1 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

PRP_{dBm} according to Annex B.2.14 for a corresponding Band.

Number of measurement samples is less than 4

AWGN propagation condition.

Table 10.1.25.2-1a: UE Rx-Tx time difference measurement accuracy in FR1 in AWGN with reduced measurement samples

Accuracy	Conditions						
	PRS Es/lot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$ Note 3)	NR operating band groups Note 2	Io Note 4 range	
						Minimum Io Note 1	Maximum Io
Tc Note 5	dB	RB	kHz			dBm / SCS _{PRS}	dBm/BW
$\pm 59+\delta$	0	≥ 52	15	≥ 1	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-50
					NR_FDD_FR1_B	-126.5	-50
					NR_TDD_FR1_C	-126	-50

					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-50
					NR_FDD_FR1_F	-124.5	-50
					NR_FDD_FR1_G, NR_TDD_FR1_G	-124	-50
					NR_FDD_FR1_H	-123.5	-50
± 30+δ6		>104		≥1	NOTE 6	NOTE 6	NOTE 6
± 30+δ		≥48	30	≥1	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-50
					NR_FDD_FR1_B	-123.5	-50
					NR_TDD_FR1_C	-123	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-50
					NR_FDD_FR1_F	-121.5	-50
					NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-50
± 15+δ		≥132		≥1	NOTE 6	NOTE 6	NOTE 6
± 15+δ		≥64	60	≥1	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
					NR_FDD_FR1_B	-120.5	-50
					NR_TDD_FR1_C	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-50
					NR_FDD_FR1_F	-118.5	-50
					NR_FDD_FR1_G, NR_TDD_FR1_G	-118	-50
± 7+δ		≥132		≥1	NOTE 6	NOTE 6	NOTE 6
± 75+δ	-6	≥52	15	≥1	NOTE 6	NOTE 6	NOTE 6
>104		≥1		NOTE 6	NOTE 6	NOTE 6	
± 37+δ				NOTE 6	NOTE 6	NOTE 6	
± 39+δ		≥48	30	≥1	NOTE 6	NOTE 6	NOTE 6
± 16+δ		≥132		≥1	NOTE 6	NOTE 6	NOTE 6
± 16+δ		≥64	60	≥1	NOTE 6	NOTE 6	NOTE 6
± 8+δ	≥132	≥1		NOTE 6	NOTE 6	NOTE 6	
NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol. NOTE 2: NR operating band groups are as defined in Section 3.5. NOTE 3: $T_{\text{rep}}^{\text{PRS}}, L_{\text{PRS}}, K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter <i>dl-PRS-ResourceRepetitionFactor</i> , <i>dl-PRS-NumSymbols</i> and <i>dl-PRS-CombSizeN</i> defined in TS 37.355 [34]. NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot. NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6]. NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS. NOTE 7: δ is the margin determined from Table 10.1.25.2-5.							

The relative accuracy requirements in Table 10.1.25.2-1b for FR1 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

PRP_{dBm} according to Annex B.2.14 for a corresponding Band.

AWGN propagation condition.

the two UE Rx-Tx time difference measurements are associated with the same RxTx TEG

Table 10.1.25.2-1b: UE Rx-Tx time difference relative measurement accuracy in FR1 in AWGN with TEG reporting

Accuracy	Conditions							
	PRs Ês/lot	PRs SCS	PRs bandwidth Note 1	PRs resource repetition ($T_{\text{rep}}^{\text{PRs}} * L_{\text{PRs}} / K_{\text{comb}}^{\text{PRs}}$) Note 2	Io ^{Note 3} range			
					NR operating band groups ^{Note 4}	Minimum Io	Maximum Io	
Tc ^{Note 5}	dB	kHz	RB			dBm/SCS	dBm/BW _{Channel}	
132 + Δ ^{Note 7}	(PRs Ês/lot) _j ≥ -6dB (PRs Ês/lot) _i ≥ -13dB	15	≥ [24	≥ 4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-50	
					NR_FDD_FR1_B	-126.5	-50	
					NR_TDD_FR1_C	-126	-50	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-50	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-50	
					NR_FDD_FR1_F	-124.5	-50	
					NR_FDD_FR1_G, NR_TDD_FR1_G	-124	-50	
					NR_FDD_FR1_H	-123.5	-50	
98 + Δ		≥ 52	≥ 1	Note 6	Note 6	Note 6		
42 + Δ		≥ 104	≥ 1	Note 6	Note 6	Note 6		
75 + Δ		30	≥ 24	≥ 4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-50	
					NR_FDD_FR1_B	-123.5	-50	
					NR_TDD_FR1_C	-123	-50	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-50	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-50	
					NR_FDD_FR1_F	-121.5	-50	
					NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-50	
					NR_FDD_FR1_H	-120.5	-50	
48 + Δ		≥ 48	≥ 1	Note 6	Note 6	Note 6		
24 + Δ		≥ 132	≥ 1	Note 6	Note 6	Note 6		
50 + Δ		60	≥24	≥ 4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50	
					NR_FDD_FR1_B	-120.5	-50	
					NR_TDD_FR1_C	-120	-50	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-50	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-50	
					NR_FDD_FR1_F	-118.5	-50	
					NR_FDD_FR1_G, NR_TDD_FR1_G	-118	-50	
					NR_FDD_FR1_H	-117.5	-50	
24 + Δ		≥ 64	≥ 1	Note 6	Note 6	Note 6		
10 + Δ		≥ 132	≥ 1	Note 6	Note 6	Note 6		
NOTE 1: Minimum PRs bandwidth, which is minimum of the PRs bandwidths of resource j and resource i. NOTE 2: Minimum number of PRs resource repetitions among resource j and resource i. $T_{\text{rep}}^{\text{PRs}}$, L_{PRs} , $K_{\text{comb}}^{\text{PRs}}$ are configured by higher layer parameter <i>dl-PRs-ResourceRepetitionFactor</i> , <i>dl-PRs-NumSymbols</i> and <i>dl-PRs-CombSizeN</i> defined in TS 37.355 [34], respectively. NOTE 3: Io is assumed to have constant EPRE across the bandwidth. NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2. NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].								

NOTE 6: The same bands and the same Δ conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.

NOTE 7: Δ is the value of the timing error margin for the RxTx TEG, reported via *nr-UE-RxTxTEG-TimingErrorMargin*. Δ cannot be larger than the sum of the margins in table 10.1.25.2-5 (dependent on PRS/SRS BW) for any pair of individual UE Rx-Tx time difference measurements associated with the RxTx TEG. .

The accuracy requirements in Table 10.1.25.2-2 for FR1 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex B.2.14 for a corresponding Band.

Fading propagation condition.

Table 10.1.25.2-2: UE Rx-Tx time difference measurement accuracy in FR1 in fading

Accuracy	Conditions						
	PRS Ês/lot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}}/K_{\text{comb}}^{\text{PRS}}$ Note 3)	NR operating band groups ^{Note 2}	Io ^{Note 4} range	
						Minimum Io ^{Note 1}	Maximum Io
Tc ^{Note 5}	dB	RB	kHz			dBm / SCS _{PRS}	dBm/BW
± 137+δ	-3	≥24	15	≥4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-50
					NR_FDD_FR1_B	-126.5	
					NR_TDD_FR1_C	-126	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	
					NR_FDD_FR1_F	-124.5	
					NR_FDD_FR1_G, NR_TDD_FR1_G	-124	
					NR_FDD_FR1_H	-123.5	
± 96+δ	-3	≥52	15	≥1	NOTE 6	NOTE 6	NOTE 6
± 62+δ		>104		≥1	NOTE 6	NOTE 6	NOTE 6
± 87+δ		≥24	30	≥4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-50
					NR_FDD_FR1_B	-123.5	
					NR_TDD_FR1_C	-123	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-122	
					NR_FDD_FR1_F	-121.5	
					NR_FDD_FR1_G, NR_TDD_FR1_G	-121	
					NR_FDD_FR1_H	-120.5	
± 68+δ	-3	≥48	30	≥1	NOTE 6	NOTE 6	NOTE 6
± 44+δ		≥132		≥1	NOTE 6	NOTE 6	NOTE 6
± 59+δ		≥24	60	≥4	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
					NR_FDD_FR1_B	-120.5	
					NR_TDD_FR1_C	-120	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-119	
					NR_FDD_FR1_F	-118.5	

				NR_FDD_FR1_G, NR_TDD_FR1_G	-118	
				NR_FDD_FR1_H	-117.5	
$\pm 42+\delta$	-13	≥ 64	15	≥ 1	NOTE 6	NOTE 6
$\pm 36+\delta$		≥ 132		≥ 1	NOTE 6	NOTE 6
$\pm 180+\delta$		≥ 24		≥ 4	NOTE 6	NOTE 6
$\pm 98+\delta$		≥ 52		≥ 1	NOTE 6	NOTE 6
$\pm 68+\delta$		>104	30	≥ 1	NOTE 6	NOTE 6
$\pm 87+\delta$		≥ 24		≥ 4	NOTE 6	NOTE 6
$\pm 85+\delta$		≥ 48		≥ 1	NOTE 6	NOTE 6
$\pm 44+\delta$		≥ 132			NOTE 6	NOTE 6
$\pm 139+\delta$		≥ 24	60	≥ 4	NOTE 6	NOTE 6
$\pm 46+\delta$		≥ 64		≥ 1	NOTE 6	NOTE 6
$\pm 30+\delta$		≥ 132		≥ 1	NOTE 6	NOTE 6

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.

NOTE 2: NR operating band groups are as defined in Section 3.5.

NOTE 3: T_{rep}^{PRS} , L_{PRS} , K_{comb}^{PRS} are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor*, *dl-PRS-NumSymbols* and *dl-PRS-CombSizeN* defined in TS 37.355 [34].

NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot.

NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].

NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.

NOTE 7: δ is the margin determined from Table 10.1.25.2-5.

The accuracy requirements in Table 10.1.25.2-3 for FR2 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

PRP_{dBm} according to Annex B.2.14 for a corresponding Band.

AWGN propagation condition.

Table 10.1.25.2-3: UE Rx-Tx time difference measurement accuracy in FR2 in AWGN

Accuracy	Conditions						
	PRS Es/lot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} /$ $K_{\text{comb}}^{\text{PRS}}$ Note 3)	Io ^{Note 4} range		
					Minimum Io ^{Note 1}	Maximum Io	
Tc ^{Note 5}	dB	RB	kHz		dBm / SCS _{PRS}	dBm/BW _{Channel}	
± 22+δ	-3	≥24	60	≥4	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50	
± 15+δ		≥64		≥1	NOTE 6	NOTE 6	
± 7+δ		≥132		≥1	NOTE 6	NOTE 6	
± 12+δ		≥32	120	≥14	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50	
± 7+δ	-13	≥64	60	≥1	NOTE 6	NOTE 6	
± 4+δ		≥128		≥1	NOTE 6	NOTE 6	
± 35+δ		≥24		≥1	NOTE 6	NOTE 6	
± 15+δ		≥64		≥1	NOTE 6	NOTE 6	
± 7+δ		≥132	≥1	NOTE 6	NOTE 6		
± 14+δ		≥32	120	≥4	NOTE 6	NOTE 6	
± 9+δ		≥64		≥1	NOTE 6	NOTE 6	
± 4+δ		≥128		≥1	NOTE 6	NOTE 6	
NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.							
NOTE 2: NR operating band groups are as defined in Section 3.5.							
NOTE 3: $T_{\text{rep}}^{\text{PRS}}$, L_{PRS} , $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter <i>dl-PRS-ResourceRepetitionFactor</i> , <i>dl-PRS-NumSymbols</i> and <i>dl-PRS-CombSizeN</i> defined in TS 37.355 [34].							

NOTE 4: The I_o is defined in PRS slots. The same I_o range applies to PRS and non-PRS symbols. I_o levels are different in PRS and non-PRS symbols within the same slot.

NOTE 5: T_c is the basic timing unit defined in TS 38.211 [6].

NOTE 6: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.

NOTE 7: δ is the margin determined from Table 10.1.25.2-6.

The accuracy requirements in Table 10.1.25.2-3a for FR2 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex B.2.14 for a corresponding Band

Number of measurement samples is less than 4

AWGN propagation condition.

Table 10.1.25.2-3a: UE Rx-Tx time difference measurement accuracy in FR2 in AWGN with reduced measurement samples

Accuracy	Conditions					
	PRS Es/lot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition $(T_{rep}^{PRS} * L_{PRS} / K_{comb}^{PRS})$ Note 3	Io ^{Note 4} range	
					Minimum Io ^{Note 1}	Maximum Io
Tc ^{Note 5}	dB	RB	kHz		dBm / SCS _{PRS}	dBm/BW _{Channel}
± 15+δ	0	≥64	60	≥1	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	NOTE 6
± 7+δ		≥132		≥1	NOTE 6	NOTE 6
± 7+δ		≥64	120	≥1	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	NOTE 6
± 4+δ		≥128		≥1	NOTE 6	NOTE 6
± 15+δ	-6	≥64	60	≥1	NOTE 6	NOTE 6
± 7+δ		≥132		≥1	NOTE 6	NOTE 6
± 9+δ		≥64	120	≥1	NOTE 6	NOTE 6
± 4+δ		≥128		≥1	NOTE 6	NOTE 6
NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol. NOTE 2: NR operating band groups are as defined in Section 3.5. NOTE 3: T_{rep}^{PRS} , L_{PRS} , K_{comb}^{PRS} are configured by higher layer parameter dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN defined in TS 37.355 [34]. NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot. NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6]. NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS. NOTE 7: δ is the margin determined from Table 10.1.25.2-6.						

The relative accuracy requirements in Table 10.1.25.2-3b for FR2 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex B.2.14 for a corresponding Band

AWGN propagation condition.

the two UE Rx-Tx time difference measurements are associated with the same RxTx TEG

Table 10.1.25.2-3b: UE Rx-Tx time difference relative measurement accuracy in FR2 in AWGN with TEG reporting

Accuracy	Conditions					
	PRS Ês/lot	PRS SCS	PRS bandwidth Note 1	PRS resource repetition ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$) Note 2	Io ^{Note 3} range	
					Minimum Io	Maximum Io
Tc ^{Note 4}	dB	kHz	RB		dBm/SCS	dBm/BW _{Channel}
35 + Δ ^{Note 6}	(PRS Ês/lot) _i ≥ -6dB	60	≥ 24	≥ 4	Same value as PRS_RP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
24 + Δ			≥ 64	≥ 1	Note 5	Note 5
11 + Δ			≥ 132	≥ 1	Note 5	Note 5
24+ Δ	(PRS Ês/lot) _i ≥ -13dB	120	≥ 32	≥ 4	Same value as PRS_RP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
13 + Δ			≥ 64	≥ 1	Note 5	Note 5
6 + Δ			≥ 128	≥ 1	Note 5	Note 5
NOTE 1: Minimum PRS bandwidth, which is minimum of the PRS bandwidths of resource j and resource i.						
NOTE 2: Minimum number of PRS resource repetitions among resource j and resource i. $T_{\text{rep}}^{\text{PRS}}$, L_{PRS} , $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter <i>dl-PRS-ResourceRepetitionFactor</i> , <i>dl-PRS-NumSymbols</i> and <i>dl-PRS-CombSizeN</i> defined in TS 37.355 [34], respectively.						
NOTE 3: Io is assumed to have constant EPRE across the bandwidth.						
NOTE 4: Tc is the basic timing unit defined in TS 38.211 [6].						
NOTE 5: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.						
NOTE 6: Δ is the value of the timing error margin for the RxTx TEG, reported via <i>nr-UE-RxTxTEG-TimingErrorMargin</i> . Δ cannot be larger than the sum of the margins in table 10.1.25.2-6 (dependent on PRS/SRS BW) for any pair of individual UE Rx-Tx time difference measurements associated with the RxTx TEG.						

The accuracy requirements in Table 10.1.25.2-4 for FR2 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

PRP_{dBm} according to Annex B.2.14 for a corresponding Band.

Fading propagation condition.

Table 10.1.25.2-4: UE Rx-Tx time difference measurement accuracy in FR2 in fading

Accuracy	Conditions					
	PRS $\hat{E}_s/\text{lot}$	Minimum PRS bandwidth	PRS SCS	PRS resource repetition ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$) Note 3	Io Note 4 range	
					Minimum Io Note 1	Maximum Io
T_c Note 5	dB	RB	kHz		dBm / SCS _{PRS}	dBm/BW _{Channel}
$\pm 75 + \delta$	-3	≥ 24	60	≥ 4	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
$\pm 72 + \delta$		≥ 64		≥ 1	NOTE 6	NOTE 6
$\pm 57 + \delta$		≥ 132		≥ 1	NOTE 6	NOTE 6
$\pm 61 + \delta$		≥ 32	120	≥ 4	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
$\pm 64 + \delta$		≥ 64		≥ 1	NOTE 6	NOTE 6
$\pm 55 + \delta$		≥ 128		≥ 1	NOTE 6	NOTE 6
$\pm 92 + \delta$	-13	≥ 24	60	≥ 4	NOTE 6	NOTE 6
$\pm 70 + \delta$		≥ 64		≥ 1	NOTE 6	NOTE 6

$\pm 57+\delta$	≥ 132	120	≥ 1	NOTE 6	NOTE 6
$\pm 60+\delta$	≥ 32		≥ 4	NOTE 6	NOTE 6
$\pm 66+\delta$	≥ 64		≥ 1	NOTE 6	NOTE 6
$\pm 62+\delta$	≥ 128		≥ 1	NOTE 6	NOTE 6

NOTE 1: This minimum l_0 condition is expressed as the average l_0 per RE over all REs in an OFDM symbol.

NOTE 2: NR operating band groups are as defined in Section 3.5.

NOTE 3: $T_{\text{rep}}^{\text{PRS}}$, L_{PRS} , $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor*, *dl-PRS-NumSymbols* and *dl-PRS-CombSizeN* defined in TS 37.355 [34].

NOTE 4: The l_0 is defined in PRS slots. The same l_0 range applies to PRS and non-PRS symbols. l_0 levels are different in PRS and non-PRS symbols within the same slot.

NOTE 5: T_c is the basic timing unit defined in TS 38.211 [6].

NOTE 6: The same bands and the same l_0 conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.

NOTE 7: δ is the margin determined from Table 10.1.25.2-6.

Table 10.1.25.2-5: Margin for UE Rx-Tx time difference measurement accuracy in FR1

Min(PRS BW, SRS BW) (RB)			Margin (T_c ^{Note 1})
SCS = 15 kHz	SCS = 30 kHz	SCS = 60 kHz	
≥ 24	N/A	N/A	160
≥ 52	≥ 24	N/A	80
≥ 104	≥ 48	≥ 24	56
N/A	≥ 132	≥ 64	24
N/A	N/A	≥ 132	24

NOTE 1: T_c is the basic timing unit defined in TS 38.211 [6].

NOTE 2: If SRS and PRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.

Table 10.1.25.2-6: Margin for UE Rx-Tx time difference measurement accuracy in FR2

Min(PRS BW, SRS BW) (RB)		Margin (T_c ^{Note 1})
SCS = 60 kHz	SCS = 120 kHz	
≥ 24	N/A	76
≥ 64	≥ 32	32
≥ 132	≥ 64	24
N/A	≥ 128	20

NOTE 1: T_c is the basic timing unit defined in TS 38.211 [6].

NOTE 2: If SRS and PRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.

10.1.25.3 Report mapping

Absolute UE Rx-Tx measurement reporting in clause 10.1.25.3.1, differential reporting for UE Rx-Tx measurement in clause 10.1.25.3.2, and additional path report mapping for UE Rx-Tx measurement in clause 10.1.25.3.3 applies, regardless of number of samples used to measure PRS, to report:

- TEG based measurement corresponding to UE reported Rx TEG in *nr-UE-Rx-TEG-ID-r17* [34],
- gap-based UE Rx-Tx measurement,
- gapless UE Rx-Tx measurement,
- UE Rx-Tx in RRC_INACTIVE state.

10.1.25.3.1 Absolute UE Rx-Tx Measurement Report Mapping

The reporting range for the absolute UE Rx-Tx time difference measurement ($T_{UE\ Rx-Tx}$) is defined from $-985024 \times T_c$ to $985024 \times T_c$ with the resolution step of $2^k \times T_c$, where:

T_c is defined in TS 38.211 [6],

$$k_{min} \leq k \leq k_{max},$$

$k_{min}=2$ and $k_{max}=5$, when at least one of the PRS and the SRS resources configured for $T_{UE\ Rx-Tx}$ is in FR1,

$k_{min}=0$ and $k_{max}=5$, when both PRS and SRS resources configured for $T_{UE\ Rx-Tx}$ are in FR2,

$k \geq \text{timingReportingGranularityFactor}$ [34] configured by LMF via LPP for the UE Rx-Tx time difference measurement.

The $T_{UE\ Rx-Tx}$ report mapping for $k = 0, 1, 2, 3, 4$, and 5 are specified in Tables 10.1.25.3.1-1, 10.1.25.3.1-2, 10.1.25.3.1-3, 10.1.25.3.1-4, 10.1.25.3.1-5, and 10.1.25.3.1-6, respectively.

Table 10.1.25.3.1-1: Absolute UE Rx-Tx time difference measurement report mapping for $k=0$

Reported Quantity Value	Measured Quantity Value	Unit
RX-TX_TIME_DIFFERENCE_0000	$T_{UE\ Rx-Tx} < -985024$	T_c
RX-TX_TIME_DIFFERENCE_0001	$-985024 \leq T_{UE\ Rx-Tx} < -985023$	T_c
RX-TX_TIME_DIFFERENCE_0002	$-985023 \leq T_{UE\ Rx-Tx} < -985022$	T_c
...	...	...
RX-TX_TIME_DIFFERENCE_985024	$-1 \leq T_{UE\ Rx-Tx} < 0$	T_c
RX-TX_TIME_DIFFERENCE_985025	$0 \leq T_{UE\ Rx-Tx} < 1$	T_c
...	...	...
RX-TX_TIME_DIFFERENCE_1970047	$985022 \leq T_{UE\ Rx-Tx} < 985023$	T_c
RX-TX_TIME_DIFFERENCE_1970048	$985023 \leq T_{UE\ Rx-Tx} < 985024$	T_c
RX-TX_TIME_DIFFERENCE_1970049	$985024 \leq T_{UE\ Rx-Tx}$	T_c

Table 10.1.25.3.1-2: Absolute UE Rx-Tx time difference measurement report mapping for $k=1$

Reported Quantity Value	Measured Quantity Value	Unit
RX-TX_TIME_DIFFERENCE_0000	$T_{UE\ Rx-Tx} < -985024$	T_c
RX-TX_TIME_DIFFERENCE_0001	$-985024 \leq T_{UE\ Rx-Tx} < -985022$	T_c
RX-TX_TIME_DIFFERENCE_0002	$-985022 \leq T_{UE\ Rx-Tx} < -985020$	T_c
...	...	...
RX-TX_TIME_DIFFERENCE_492512	$-2 \leq T_{UE\ Rx-Tx} < 0$	T_c
RX-TX_TIME_DIFFERENCE_492513	$0 \leq T_{UE\ Rx-Tx} < 2$	T_c
...	...	...
RX-TX_TIME_DIFFERENCE_985023	$985020 \leq T_{UE\ Rx-Tx} < 985022$	T_c
RX-TX_TIME_DIFFERENCE_985024	$985022 \leq T_{UE\ Rx-Tx} < 985024$	T_c
RX-TX_TIME_DIFFERENCE_985025	$985024 \leq T_{UE\ Rx-Tx}$	T_c

Table 10.1.25.3.1-3: Absolute UE Rx-Tx time difference measurement report mapping for $k=2$

Reported Quantity Value	Measured Quantity Value	Unit
RX-TX_TIME_DIFFERENCE_0000	$T_{UE\ Rx-Tx} < -985024$	T_c
RX-TX_TIME_DIFFERENCE_0001	$-985024 \leq T_{UE\ Rx-Tx} < -985020$	T_c
RX-TX_TIME_DIFFERENCE_0002	$-985020 \leq T_{UE\ Rx-Tx} < -985016$	T_c
...	...	...
RX-TX_TIME_DIFFERENCE_246256	$-4 \leq T_{UE\ Rx-Tx} < 0$	T_c
RX-TX_TIME_DIFFERENCE_246257	$0 \leq T_{UE\ Rx-Tx} < 4$	T_c
...	...	...
RX-TX_TIME_DIFFERENCE_492511	$985016 \leq T_{UE\ Rx-Tx} < 985020$	T_c
RX-TX_TIME_DIFFERENCE_492512	$985020 \leq T_{UE\ Rx-Tx} < 985024$	T_c
RX-TX_TIME_DIFFERENCE_492513	$985024 \leq T_{UE\ Rx-Tx}$	T_c

Table 10.1.25.3.1-4: Absolute UE Rx-Tx time difference measurement report mapping for $k=3$

Reported Quantity Value	Measured Quantity Value	Unit
RX-TX_TIME_DIFFERENCE_0000	$T_{UE\ Rx-Tx} < -985024$	T_c
RX-TX_TIME_DIFFERENCE_0001	$-985024 \leq T_{UE\ Rx-Tx} < -985016$	T_c
RX-TX_TIME_DIFFERENCE_0002	$-985016 \leq T_{UE\ Rx-Tx} < -985008$	T_c
...	...	...
RX-TX_TIME_DIFFERENCE_123128	$-8 \leq T_{UE\ Rx-Tx} < 0$	T_c
RX-TX_TIME_DIFFERENCE_123129	$0 \leq T_{UE\ Rx-Tx} < 8$	T_c
...	...	...
RX-TX_TIME_DIFFERENCE_246255	$985008 \leq T_{UE\ Rx-Tx} < 985016$	T_c
RX-TX_TIME_DIFFERENCE_246256	$985016 \leq T_{UE\ Rx-Tx} < 985024$	T_c
RX-TX_TIME_DIFFERENCE_246257	$985024 \leq T_{UE\ Rx-Tx}$	T_c

Table 10.1.25.3.1-5: Absolute UE Rx-Tx time difference measurement report mapping for $k=4$

Reported Quantity Value	Measured Quantity Value	Unit
RX-TX_TIME_DIFFERENCE_0000	$T_{UE\ Rx-Tx} < -985024$	T_c
RX-TX_TIME_DIFFERENCE_0001	$-985024 \leq T_{UE\ Rx-Tx} < -985008$	T_c
RX-TX_TIME_DIFFERENCE_0002	$-985008 \leq T_{UE\ Rx-Tx} < -984992$	T_c
...	...	...
RX-TX_TIME_DIFFERENCE_61564	$-16 \leq T_{UE\ Rx-Tx} < 0$	T_c
RX-TX_TIME_DIFFERENCE_61565	$0 \leq T_{UE\ Rx-Tx} < 16$	T_c
...	...	...
RX-TX_TIME_DIFFERENCE_123127	$984992 \leq T_{UE\ Rx-Tx} < 985008$	T_c
RX-TX_TIME_DIFFERENCE_123128	$985008 \leq T_{UE\ Rx-Tx} < 985024$	T_c
RX-TX_TIME_DIFFERENCE_123129	$985024 \leq T_{UE\ Rx-Tx}$	T_c

Table 10.1.25.3.1-6: Absolute UE Rx-Tx time difference measurement report mapping for $k=5$

Reported Quantity Value	Measured Quantity Value	Unit
RX-TX_TIME_DIFFERENCE_0000	$T_{UE\ Rx-Tx} < -985024$	T_c
RX-TX_TIME_DIFFERENCE_0001	$-985024 \leq T_{UE\ Rx-Tx} < -984992$	T_c
RX-TX_TIME_DIFFERENCE_0002	$-984992 \leq T_{UE\ Rx-Tx} < -984960$	T_c
...	...	...
RX-TX_TIME_DIFFERENCE_30782	$-32 \leq T_{UE\ Rx-Tx} < 0$	T_c
RX-TX_TIME_DIFFERENCE_30783	$0 \leq T_{UE\ Rx-Tx} < 32$	T_c
...	...	...
RX-TX_TIME_DIFFERENCE_61563	$984960 \leq T_{UE\ Rx-Tx} < 984992$	T_c
RX-TX_TIME_DIFFERENCE_61564	$984992 \leq T_{UE\ Rx-Tx} < 985024$	T_c
RX-TX_TIME_DIFFERENCE_61565	$985024 \leq T_{UE\ Rx-Tx}$	T_c

10.1.25.3.2 Differential UE Rx-Tx Measurement Report Mapping

The reporting range for differential UE Rx-Tx time difference measurement ($\Delta T_{UE\ Rx-Tx}$) is defined from 0 up to $8191 \times T_c$ where:

$\Delta T_{UE\ Rx-Tx} = T_{UE\ Rx-Tx1} - T_{UE\ Rx-Tx2}$; where:

$T_{UE\ Rx-Tx1} > T_{UE\ Rx-Tx2}$,

$T_{UE\ Rx-Tx1}$ is the first absolute UE Rx-Tx time difference measurement,

$T_{UE\ Rx-Tx2}$ is the second absolute UE Rx-Tx time difference measurement,

T_c is defined in TS 38.211 [6],

$k_{min} \leq k \leq k_{max}$,

$k_{min}=2$ and $k_{max}=5$, when at least one of the PRS and the SRS resources configured for $\Delta T_{UE\ Rx-Tx}$ is in FR1,

$k_{min}=0$ and $k_{max}=5$, when all the PRS and SRS resources configured for $\Delta T_{UE\ Rx-Tx}$ are in FR2,

$k \geq \text{timingReportingGranularityFactor}$ [34] configured by LMF via LPP for the UE Rx-Tx time difference measurement.

The $\Delta T_{UE\ Rx-Tx}$ report mapping for $k = 0, 1, 2, 3, 4$, and 5 are specified in Tables 10.1.25.3.2-1, 10.1.25.3.2-2, 10.1.25.3.2-3, 10.1.25.3.2-4, 10.1.25.3.2-5, and 10.1.25.3.2-6, respectively.

Table 10.1.25.3.2-1: Differential UE Rx-Tx time difference measurement report mapping for $k=0$

Reported Quantity Value	Measured Quantity Value	Unit
DIFF_RX-TX_TIME_DIFFERENCE_0000	$0 \leq \Delta T_{UE\ Rx-Tx} < 1$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0001	$1 \leq \Delta T_{UE\ Rx-Tx} < 2$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0002	$2 \leq \Delta T_{UE\ Rx-Tx} < 3$	T_c
...	...	...
DIFF_RX-TX_TIME_DIFFERENCE_8189	$8189 \leq \Delta T_{UE\ Rx-Tx} < 8190$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_8190	$8190 \leq \Delta T_{UE\ Rx-Tx} < 8191$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_8191	$8191 \leq \Delta T_{UE\ Rx-Tx}$	T_c

Table 10.1.25.3.2-2: Differential UE Rx-Tx time difference measurement report mapping for $k=1$

Reported Quantity Value	Measured Quantity Value	Unit
DIFF_RX-TX_TIME_DIFFERENCE_0000	$0 \leq \Delta T_{UE\ Rx-Tx} < 2$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0001	$2 \leq \Delta T_{UE\ Rx-Tx} < 4$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0002	$4 \leq \Delta T_{UE\ Rx-Tx} < 6$	T_c
...	...	...
DIFF_RX-TX_TIME_DIFFERENCE_4093	$8186 \leq \Delta T_{UE\ Rx-Tx} < 8188$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_4094	$8188 \leq \Delta T_{UE\ Rx-Tx} < 8190$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_4095	$8190 \leq \Delta T_{UE\ Rx-Tx}$	T_c

Table 10.1.25.3.2-3: Differential UE Rx-Tx time difference measurement report mapping for $k=2$

Reported Quantity Value	Measured Quantity Value	Unit
DIFF_RX-TX_TIME_DIFFERENCE_0000	$0 \leq \Delta T_{UE\ Rx-Tx} < 4$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0001	$4 \leq \Delta T_{UE\ Rx-Tx} < 8$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0002	$8 \leq \Delta T_{UE\ Rx-Tx} < 12$	T_c
...	...	...
DIFF_RX-TX_TIME_DIFFERENCE_2045	$8180 \leq \Delta T_{UE\ Rx-Tx} < 8184$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_2046	$8184 \leq \Delta T_{UE\ Rx-Tx} < 8188$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_2047	$8188 \leq \Delta T_{UE\ Rx-Tx}$	T_c

Table 10.1.25.3.2-4: Differential UE Rx-Tx time difference measurement report mapping for $k=3$

Reported Quantity Value	Measured Quantity Value	Unit
DIFF_RX-TX_TIME_DIFFERENCE_0000	$0 \leq \Delta T_{UE\ Rx-Tx} < 8$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0001	$8 \leq \Delta T_{UE\ Rx-Tx} < 16$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0002	$16 \leq \Delta T_{UE\ Rx-Tx} < 24$	T_c
...	...	...
DIFF_RX-TX_TIME_DIFFERENCE_1021	$8168 \leq \Delta T_{UE\ Rx-Tx} < 8176$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_1022	$8176 \leq \Delta T_{UE\ Rx-Tx} < 8184$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_1023	$8184 \leq \Delta T_{UE\ Rx-Tx}$	T_c

Table 10.1.25.3.2-5: Differential UE Rx-Tx time difference measurement report mapping for $k=4$

Reported Quantity Value	Measured Quantity Value	Unit
DIFF_RX-TX_TIME_DIFFERENCE_0000	$0 \leq \Delta T_{UE\ Rx-Tx} < 16$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0001	$16 \leq \Delta T_{UE\ Rx-Tx} < 32$	T_c

DIFF_RX-TX_TIME_DIFFERENCE_0002	$32 \leq \Delta T_{UE\ Rx-Tx} < 48$	T_c
...	...	...
DIFF_RX-TX_TIME_DIFFERENCE_509	$8144 \leq \Delta T_{UE\ Rx-Tx} < 8160$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_510	$8160 \leq \Delta T_{UE\ Rx-Tx} < 8176$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_511	$8176 \leq \Delta T_{UE\ Rx-Tx}$	T_c

Table 10.1.25.3.2-6: Differential UE Rx-Tx time difference measurement report mapping for $k=5$

Reported Quantity Value	Measured Quantity Value	Unit
DIFF_RX-TX_TIME_DIFFERENCE_0000	$0 \leq \Delta T_{UE\ Rx-Tx} < 32$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0001	$32 \leq \Delta T_{UE\ Rx-Tx} < 64$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_0002	$64 \leq \Delta T_{UE\ Rx-Tx} < 96$	T_c
...	...	...
DIFF_RX-TX_TIME_DIFFERENCE_253	$8096 \leq \Delta T_{UE\ Rx-Tx} < 8128$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_254	$8128 \leq \Delta T_{UE\ Rx-Tx} < 8160$	T_c
DIFF_RX-TX_TIME_DIFFERENCE_255	$8160 \leq \Delta T_{UE\ Rx-Tx}$	T_c

10.1.25.3.3 Additional Path Report Mapping for UE Rx-Tx Time Difference

The reporting range for the additional path reporting for an UE Rx-Tx time difference measurement is defined up to the range from $-8175 \times T_c$ to $8175 \times T_c$ with the resolution step of $2^k \times T_c$, where

T_c is defined in TS 38.211 [6],

$$k_{min} \leq k \leq k_{max},$$

$k_{min}=2$ and $k_{max}=5$, when at least one of the PRS resource and SRS resource configured for the UE Rx-Tx time difference measurement is in FR1,

$k_{min}=0$ and $k_{max}=5$, when both of the PRS resource and SRS resource configured for the UE Rx-Tx time difference measurement is in FR2,

$k \geq \text{timingReportingGranularityFactor}$ [34] configured by LMF via LPP for the UE Rx-Tx time difference measurement.

The UE can report the timing of up to two additional paths with respect to the path timing determining the UE Rx-Tx time difference measurement.

The UE capable of *additionalPathsExtSupport-r17* can report the timing of up to its supported number of additional paths with respect to the path timing determining the UE Rx-Tx measurement.

The report mappings for different k values are specified in Tables 10.1.25.3.3-1 – 10.1.25.3.3-6.

Table 10.1.25.3.3-1: Report mapping for $k=0$

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_00000	$\Delta\text{path} < -8175$	T_c
path_00001	$-8175 \leq \Delta\text{path} < -8174$	T_c
path_00002	$-8174 \leq \Delta\text{path} < -8173$	T_c
...	...	...
path_08175	$-1 \leq \Delta\text{path} < 0$	T_c
path_08176	$0 \leq \Delta\text{path} < 1$	T_c
...	...	...
path_16349	$8173 \leq \Delta\text{path} < 8174$	T_c
path_16350	$8174 \leq \Delta\text{path} < 8175$	T_c
path_16351	$8175 \leq \Delta\text{path}$	T_c

Table 10.1.25.3.3-2: Report mapping for $k=1$

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	$\Delta\text{path} < -8175$	T_c
path_0001	$-8175 \leq \Delta\text{path} < -8173$	T_c
path_0002	$-8173 \leq \Delta\text{path} < -8171$	T_c
...	...	...
path_4088	$-1 \leq \Delta\text{path} < 1$	T_c
...	...	...
path_8174	$8171 \leq \Delta\text{path} < 8173$	T_c
path_8175	$8173 \leq \Delta\text{path} < 8175$	T_c
path_8176	$8175 \leq \Delta\text{path}$	T_c

Table 10.1.25.3.3-3: Report mapping for $k=2$

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	$\Delta\text{path} < -8174$	T_c
path_0001	$-8174 \leq \Delta\text{path} < -8170$	T_c
path_0002	$-8170 \leq \Delta\text{path} < -8166$	T_c
...	...	...
path_2044	$-2 \leq \Delta\text{path} < 2$	T_c
...	...	...
path_4086	$8166 \leq \Delta\text{path} < 8170$	T_c
path_4087	$8170 \leq \Delta\text{path} < 8174$	T_c
path_4088	$8174 \leq \Delta\text{path}$	T_c

Table 10.1.25.3.3-4: Report mapping for $k=3$

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	$\Delta\text{path} < -8172$	T_c
path_0001	$-8172 \leq \Delta\text{path} < -8164$	T_c
path_0002	$-8164 \leq \Delta\text{path} < -8156$	T_c
...	...	...
path_1022	$-4 \leq \Delta\text{path} < 4$	T_c
...	...	...
path_2042	$8156 \leq \Delta\text{path} < 8164$	T_c
path_2043	$8164 \leq \Delta\text{path} < 8172$	T_c
path_2044	$8172 \leq \Delta\text{path}$	T_c

Table 10.1.25.3.3-5: Report mapping for $k=4$

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	$\Delta\text{path} < -8168$	T_c
path_0001	$-8168 \leq \Delta\text{path} < -8152$	T_c
path_0002	$-8152 \leq \Delta\text{path} < -8136$	T_c
...	...	...
path_511	$-8 \leq \Delta\text{path} < 8$	T_c
...	...	...
path_1020	$8136 \leq \Delta\text{path} < 8152$	T_c
path_1021	$8152 \leq \Delta\text{path} < 8168$	T_c
path_1022	$8168 \leq \Delta\text{path}$	T_c

Table 10.1.25.3.3-6: Report mapping for $k=5$

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_000	$\Delta\text{path} < -8160$	T_c
path_001	$-8160 \leq \Delta\text{path} < -8128$	T_c
path_002	$-8128 \leq \Delta\text{path} < -8096$	T_c
...	...	...
path_256	$0 \leq \Delta\text{path} < 32$	T_c
...	...	...
path_509	$8096 \leq \Delta\text{path} < 8128$	T_c
path_510	$8128 \leq \Delta\text{path} < 8160$	T_c
path_511	$8160 \leq \Delta\text{path}$	T_c

10.1.26 FR2 P-MPR report

The FR2 P-MPR report mapping is defined by this clause.

10.1.26.1 Report mapping

Table 10.1.26.1-1 defines the FR2 P-MPR report mapping.

Table 10.1.26.1-1 Mapping of FR2 P-MPR

Reported value	Measured quantity value	Unit
P-MPR_00	$3 \leq \text{PMP-R} < 6$	dB
P-MPR_01	$6 \leq \text{PMP-R} < 9$	dB
P-MPR_02	$9 \leq \text{PMP-R} < 12$	dB
P-MPR_03	$\text{PMP-R} \geq 12$	dB

10.1.27 L1-SINR accuracy requirements for FR1

10.1.27.1 L1-SINR accuracy requirements with CSI-RS based CMR and no dedicated IMR configured

10.1.27.1.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-SINR in this clause apply to all CSI-RS resources configured as CMR and no dedicated resource configured as IMR of the serving cell configured for L1-SINR measurement.

The accuracy requirements in Table 10.1.27.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.1 for a corresponding Band for each relevant CSI-RS based CMR.
- The bandwidth of CSI-RS as CMR is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR is equal to or better than the accuracy requirements in Table 10.1.27.1.1-1.

Table 10.1.27.1.1-1: L1-SINR absolute accuracy for CSI-RS based CMR only in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS CMR Es/lot	Io ^{Note 1} range					
			NR operating band groups ^{Note 2}	Minimum Io			Maximum Io	
dB	dB	dB		dBm / SCS _{CSI-RS}			dBm/BW Channel	dBm/BW _{Channel}
				SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz		
±5.5	±6.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.

NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

NOTE 3: The requirements apply for CSI-RS CMR $\hat{E}_s/\text{lot} \leq [6]$ dB with SCS 15kHz or 30kHz under NR high speed scenarios.

10.1.27.1.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-SINR is defined as the L1-SINR measured from one CSI-RS compared to the largest measured value of L1-SINR among all CSI-RS resources of the serving cell.

The accuracy requirements in Table 10.1.27.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.1 for a corresponding Band for each relevant CSI-RS based CMR.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR is equal to or better than the accuracy requirements in Table 10.1.27.1.2-1.

Table 10.1.27.1.2-1: L1-SINR relative accuracy for CSI-RS based CMR only in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS CMR Ês/lot Note 2	Io ^{Note 1} range					
			NR operating band groups Note 3	Minimum Io			Maximum Io	
dB	dB	dB		dBm / SCS _{CSI-RS}			dBm/BW Channel	dBm/BW _{Channel}
				SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz		

$\pm[4.5]$	$\pm[5.5]$	≥ 3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50

NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.

NOTE 2: The parameter CSI-RS CMR $\hat{E}_s/\text{lot}$ is the minimum CMR CMR $\hat{E}_s/\text{lot}$ of the pair of CSI-RS resources to which the requirement applies.

NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

NOTE 4: The requirements apply for CSI-RS CMR $\hat{E}_s/\text{lot} \leq [6]$ dB with SCS 15kHz or 30kHz under NR high speed scenarios.

10.1.27.2 L1-SINR accuracy requirements with SSB based CMR and dedicated IMR configured

10.1.27.2.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-SINR in this clause apply to all SSBs configured as CMR and dedicated resources configured as IMR of the serving cell configured for L1-SINR measurement.

The accuracy requirements are defined in Table 10.1.27.2.1-1 for SSB based CMR and NZP-IMR and in Table 10.1.27.2.1-2 for SSB based CMR and ZP-IMR.

The accuracy requirements in Tables 10.1.27.2.1-1 and 10.1.27.2.1-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.2 for a corresponding Band for each relevant SSB based CMR and IMR.
- The bandwidth of NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 10.1.27.2.1-1 and 10.1.27.2.1-2.

Table 10.1.27.2.1-1: L1-SINR absolute accuracy for SSB based CMR and NZP-IMR in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	SSB-CMR $\hat{E}_s/\text{lot}$	NZP-IMR $\hat{E}_s/\text{lot}$	I_0 ^{Note 1} range				
				NR operating band groups ^{Note 2}	Minimum I_0		Maximum I_0	
					dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
dB	dB	dB	dB		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
				NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
				NR_FDD_FR1_B	-120.5	-117.5	N/A	-50

±4.0	±5.0	≥0	≥0	NR_TDD_FR1_C	-120	-117	N/A	-50
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
				NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
				NR_FDD_FR1_G	-118	-115	N/A	-50
				NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.								
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.								
NOTE 3: The requirements apply for SSB-CMR $\hat{E}_s/I_{ot} \leq [6]$ dB with SCS 15kHz or 30kHz under NR high speed scenarios.								

Table 10.1.27.2.1-2: L1-SINR absolute accuracy for SSB based CMR and ZP-IMR in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB-CMR Ês/Iot	I ₀ ^{Note 1} range				
			NR operating band groups ^{Note 2}	Minimum I ₀		Maximum I ₀	
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±4.5	±5.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: I ₀ is assumed to have constant EPRE across the bandwidth.							
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.							
NOTE 3: The requirements apply for SSB Ês/Iot ≤ [6] dB with SCS 15kHz or 30kHz under NR high speed scenarios.							

10.1.27.2.2 Relative Accuracy

The relative accuracy of SSB based L1-SINR is defined as the L1-SINR measured from one SSB configured as CMR and one IMR configured as IMR compared to the largest measured value of L1-SINR among all SSBs and IMRs of the serving cell.

The accuracy requirements are defined in Table 10.1.27.2.2-1 for SSB based CMR and NZP-IMR and in Table 10.1.27.2.2-2 for SSB based CMR and ZP-IMR.

The accuracy requirements in Tables 10.1.27.2.2-1 and 10.1.27.2.2-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.2 for a corresponding Band for each relevant SSB based CMR and IMR.
- The bandwidth of NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 10.1.27.2.2-1 and 10.1.27.2.2-2.

Table 10.1.27.2.2-1: L1-SINR relative accuracy for SSB based CMR and NZP-IMR in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	SSB-CMR Ês/lot Note 2	NZP-IMR Ês/lot	Io ^{Note 1} range				
				NR operating band groups ^{Note 3}	Minimum Io		Maximum Io	
dB	dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
					SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±[3.0]	±[4.0]	≥0	≥0	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
				NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
				NR_TDD_FR1_C	-120	-117	N/A	-50
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
				NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
				NR_FDD_FR1_G	-118	-115	N/A	-50
				NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.								
NOTE 2: The parameter SSB CMR Ês/lot is the minimum SSB CMR Ês/lot of the pair of SSBs to which the requirement applies.								
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.								
NOTE 4: The requirements apply for SSB-CMR Ês/lot ≤ [6] dB with SCS 15kHz or 30kHz under NR high speed scenarios.								

Table 10.1.27.2.2-2: L1-SINR relative accuracy for SSB based CMR and ZP-IMR in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB-CMR Ês/Iot Note 2	Io ^{Note 1} range				
			NR operating band groups ^{Note 3}	Minimum Io		Maximum Io	
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±[3.5]	±[4.5]	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The parameter SSB CMR Ês/Iot is the minimum SSB CMR Ês/Iot of the pair of SSBs to which the requirement applies.							
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							
NOTE 4: The requirements apply for SSB Ês/Iot ≤ [6] dB with SCS 15kHz or 30kHz under NR high speed scenarios.							

10.1.27.3 L1-SINR accuracy requirements with CSI-RS based CMR and dedicated IMR configured

10.1.27.3.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-SINR in this clause apply to all CSI-RS resources configured as CMR and dedicated resources configured as IMR of the serving cell configured for L1-SINR measurement.

The accuracy requirements are defined in Table 10.1.27.3.1-1 for CSI-RS based CMR and NZP-IMR and in Table 10.1.27.3.1-2 for CSI-RS based CMR and ZP-IMR.

The accuracy requirements in Tables 10.1.27.3.1-1 and 10.1.27.3.1-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.3 for a corresponding Band for each relevant CSI-RS based CMR and IMR.
- The bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 10.1.27.3.1-1 and 10.1.27.3.1-2.

Table 10.1.27.3.1-1: L1-SINR absolute accuracy for CSI-RS based CMR and NZP-IMR in FR1

Accuracy		Conditions							
Normal condition	Extreme condition	CSI-RS CMR Ês/lot	NZP-IMR Ês/lot	Io ^{Note 1} range					
				NR operating band groups ^{Note 2}	Minimum Io			Maximum Io	
dB	dB	dB	dB		dBm / SCS _{CSI-RS}			dBm/BW _{Channel}	dBm/BW _{Channel}
					SCS _{SI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{SI-RS} = 60 kHz		
±4.0	±5.0	≥0	≥0	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
				NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
				NR_TDD_FR1_C	-120	-117	-114	N/A	-50
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
				NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
				NR_FDD_FR1_G	-118	-115	-112	N/A	-50
				NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.

NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

NOTE 3: The requirements apply for CSI-RS CMR $\hat{E}_s/\text{lot} \leq [6]$ dB with SCS 15kHz or 30kHz under NR high speed scenarios.

Table 10.1.27.3.1-2: L1-SINR absolute accuracy for CSI-RS based CMR and ZP-IMR in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS CMR Ês/lot	I _o ^{Note 1} range					
			NR operating band groups ^{Note 2}	Minimum I _o			Maximum I _o	
dB	dB	dB		dBm / SCS _{CSI-RS}			dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz		
±4.5	±5.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
NOTE 1: I _o is assumed to have constant EPRE across the bandwidth.								
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.								
NOTE 3: The requirements apply for CSI-RS CMR Ês/lot ≤ [6] dB with SCS 15kHz or 30kHz under NR high speed scenarios.								

10.1.27.3.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-SINR is defined as the L1-SINR measured from one CSI-RS configured as CMR and one IMR configured as IMR compared to the largest measured value of L1-SINR among all CSI-RS and IMR resources of the serving cell.

The accuracy requirements are defined in Table 10.1.27.3.2-1 for CSI-RS based CMR and NZP-IMR and in Table 10.1.27.3.2-2 for CSI-RS based CMR and ZP-IMR.

The accuracy requirements in Tables 10.1.27.3.2-1 and 10.1.27.3.2-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.3 for a corresponding Band for each relevant CSI-RS based CMR and IMR.
- The bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 10.1.27.3.2-1 and 10.1.27.3.2-2.

Table 10.1.27.3.2-1: L1-SINR relative accuracy for CSI-RS based CMR and NZP-IMR in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS CMR $\hat{\text{Es}}/\text{lot}$ ^{Note 2}	NZP-IMR $\hat{\text{Es}}/\text{lot}$	I_o ^{Note 1} range				
				NR operating band groups ^{Note 3}	Minimum I_o		Maximum I_o	
dB	dB	dB	dB		dBm / $\text{SCS}_{\text{CSI-RS}}$		dBm/BW _{Channel}	

					$SCS_{CSI-RS} = 15$ kHz	$SCS_{CSI-RS} = 30$ kHz	$SCS_{CSI-RS} = 60$ kHz		
$\pm[3.0]$	$\pm[4.0]$	≥ 0	≥ 0	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
				NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
				NR_TDD_FR1_C	-120	-117	-114	N/A	-50
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
				NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
				NR_FDD_FR1_G	-118	-115	-112	N/A	-50
				NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50

NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.

NOTE 2: The parameter CSI-RS CMR $\hat{E}_s/I_0$ is the minimum CMR CMR $\hat{E}_s/I_0$ of the pair of CSI-RS resources to which the requirement applies.

NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

NOTE 4: The requirements apply for CSI-RS CMR $\hat{E}_s/I_0 \leq [6]$ dB with SCS 15kHz or 30kHz under NR high speed scenarios.

Table 10.1.27.3.2-2: L1-SINR relative accuracy for CSI-RS based CMR and ZP-IMR in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	CSI-RS CMR Es/lot Note 2	Io ^{Note 1} range					
			NR operating band groups Note 3	Minimum Io			Maximum Io	
dB	dB	dB		dBm / SCS _{CSI-RS}			dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz		
±[3.5]	±[4.5]	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50

NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.

NOTE 2: The parameter CSI-RS CMR $\hat{E}_s/I_0$ is the minimum CMR CMR $\hat{E}_s/I_0$ of the pair of CSI-RS resources to which the requirement applies.

NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

NOTE 4: The requirements apply for CSI-RS CMR $\hat{E}_s/I_0 \leq [6]$ dB with SCS 15kHz or 30kHz under NR high speed scenarios.

10.1.28 L1-SINR accuracy requirements for FR2

10.1.28.1 L1-SINR accuracy requirements with CSI-RS based CMR and no dedicated IMR configured

10.1.28.1.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-SINR in this clause apply to all CSI-RS resources configured as CMR and no dedicated resource configured as IMR of the serving cell configured for L1-SINR measurement.

The accuracy requirements in Table 10.1.28.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.1 for a corresponding Band for each relevant CSI-RS based CMR.
- The bandwidth of CSI-RS as CMR is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR is equal to or better than the accuracy requirements in Table 10.1.28.1.1-1.

Table 10.1.28.1.1-1: L1-SINR absolute accuracy for CSI-RS based CMR only in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	CSI-RS CMR $\hat{E}_s/\text{lot}_3^{\text{Note}}$	$I_o^{\text{Note 1}}$ range		
			Minimum I_o		Maximum I_o
dB	dB	dB	$\text{dBm} / \text{SCS}_{\text{CSI-RS}}^{\text{Note 2}}$		$\text{dBm}/\text{BW}_{\text{Channel}}$
			$\text{SCS}_{\text{CSI-RS}} = 60\text{kHz}$	$\text{SCS}_{\text{CSI-RS}} = 120\text{kHz}$	
± 5.5	± 6.5	≥ -3	Same value as CSI-RS_RP in Table in B.2.8.1, according to UE Power class, operating band and angle of arrival		N/A
NOTE 1: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth.					
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.					
NOTE 3: In the test cases, the CSI-RS CMR $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.					

10.1.28.1.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-SINR is defined as the L1-SINR measured from one CSI-RS compared to the largest measured value of L1-SINR among all CSI-RS resources of the serving cell.

The accuracy requirements in Table 10.1.28.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.1 for a corresponding Band for each relevant CSI-RS based CMR.
- The bandwidth of CSI-RS as CMR is 48 PRBs and the density is 3.

- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- AWGN radio propagation conditions.

The performance with larger bandwidth of CSI-RS as CMR is equal to or better than the accuracy requirements in Table 10.1.28.1.2-1.

Table 10.1.28.1.2-1: L1-SINR relative accuracy for CSI-RS based CMR only in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	CSI-RS CMR $\hat{E}_s/\text{lot}$ ^{Note 2, Note 4}	I_0 ^{Note 1} range			
			Minimum I_0		Maximum I_0	
dB	dB	dB	$\text{dBm} / \text{SCS}_{\text{CSI-RS}}$ ^{Note 3}		$\text{dBm}/\text{BW}_{\text{Channel}}$	$\text{dBm}/\text{BW}_{\text{Channel}}$
			$\text{SCS}_{\text{CSI-RS}} = 60\text{kHz}$	$\text{SCS}_{\text{CSI-RS}} = 120\text{kHz}$		
± 4.5	± 5.5	≥ -3	Same value as CSI-RS_RP in Table in B.2.8.1, according to UE Power class, operating band and angle of arrival		N/A	-50
NOTE 1: I_0 specified at the Reference point, and assumed to have constant EPRE across the bandwidth.						
NOTE 2: The parameter CSI-RS CMR $\hat{E}_s/\text{lot}$ is the minimum CSI-RS CMR $\hat{E}_s/\text{lot}$ of the pair of CSI-RS resources to which the requirement applies.						
NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.						
NOTE 4: In the test cases, the CSI-RS CMR $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.						

10.1.28.2 L1-SINR accuracy requirements with SSB based CMR and dedicated IMR configured

10.1.28.2.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-SINR in this clause apply to all SSBs configured as CMR and dedicated resources configured as IMR of the serving cell configured for L1-SINR measurement.

The accuracy requirements are defined in Table 10.1.28.2.1-1 for SSB based CMR and NZP-IMR and in Table 10.1.28.2.1-2 for SSB based CMR and ZP-IMR.

The accuracy requirements in Tables 10.1.28.2.1-1 and 10.1.28.2.1-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.2 for a corresponding Band for each relevant SSB based CMR and IMR.
- The bandwidth of NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- AWGN radio propagation conditions.
- SSB based CMR and IMR in the test come from the same direction.

The performance with larger bandwidth of NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 10.1.28.2.1-1 and 10.1.28.2.1-2.

Table 10.1.28.2.1-1: L1-SINR absolute accuracy for SSB based CMR and NZP-IMR in FR2

Accuracy	Conditions
----------	------------

Normal condition	Extreme condition	SSB CMR $\hat{E}_s/\text{lot}$ Note 3	NZP-IMR $\hat{E}_s/\text{lot}$ Note 3	I_o Note 1 range		
				Minimum I_o		Maximum I_o
				dBm / SCS_{SSB} Note 2	dBm/ BW_{Channel}	dBm/ BW_{Channel}
dB	dB	dB	dB	$SCS_{SSB} = 120\text{kHz}$	$SCS_{SSB} = 240\text{kHz}$	
± 4.0	± 5.0	≥ 0	≥ 0	Same value as SSB_RP in Table in B.2.8.2, according to UE Power class, operating band and angle of arrival		-50

NOTE 1: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
NOTE 3: In the test cases, the SSB $\hat{E}_s/\text{lot}$, NZP-IMR $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.

Table 10.1.28.2.1-2: L1-SINR absolute accuracy for SSB based CMR and ZP-IMR in FR2

Accuracy		Conditions			
Normal condition	Extreme condition	SSB CMR $\hat{E}_s/\text{lot}$ Note 3	I_o Note 1 range		
			Minimum I_o		Maximum I_o
			dBm / SCS_{SSB} Note 2	dBm/ BW_{Channel}	dBm/ BW_{Channel}
dB	dB	dB	$SCS_{SSB} = 120\text{kHz}$	$SCS_{SSB} = 240\text{kHz}$	
± 4.5	± 5.5	≥ -3	Same value as SSB_RP in Table in B.2.8.2, according to UE Power class, operating band and angle of arrival		-50

NOTE 1: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth.
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.
NOTE 3: In the test cases, the SSB CMR $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.

10.1.28.2.2 Relative Accuracy

The relative accuracy of SSB based L1-SINR is defined as the L1-SINR measured from one SSB configured as CMR and one IMR configured as IMR compared to the largest measured value of L1-SINR among all SSB based CMRs and IMRs of the serving cell.

The accuracy requirements are defined in Table 10.1.28.2.2-1 for SSB based CMR and NZP-IMR and in Table 10.1.28.2.2-2 for SSB based CMR and ZP-IMR.

The accuracy requirements in Tables 10.1.28.2.2-1 and 10.1.28.2.2-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.2 for a corresponding Band for each relevant SSB based CMR and IMR.
- The bandwidth of NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- AWGN radio propagation conditions.

- SSB based CMR and IMR in the test come from the same direction.

The performance with larger bandwidth of NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 10.1.28.2.2-1 and 10.1.28.2.2-2.

Table 10.1.28.2.2-1: L1-SINR relative accuracy for SSB based CMR and NZP-IMR in FR2

Accuracy		Conditions					
Normal condition	Extreme condition	SSB CMR Ês/lot Note 2, Note 4	NZP-IMR Ês/lot Note 4	Io ^{Note 1} range			
				Minimum Io		Maximum Io	
				dBm / SCS _{SSB} ^{Note 3}			dBm/BW _{Channel}
dB	dB	dB	dB	SCS _{SSB} = 120kHz	SCS _{SSB} = 240kHz	dBm/BW _{Channel}	
±3.0	±4.0	≥0	≥0	Same value as SSB_RP in Table in B.2.8.2, according to UE Power class, operating band and angle of arrival		N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.							
NOTE 2: The parameter SSB CMR Ês/lot is the minimum SSB CMR Ês/lot of the pair of SSBs to which the requirement applies.							
NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.							
NOTE 4: In the test cases, the SSB CMR Ês/lot, NZP-IMR Ês/lot and related parameters may need to be adjusted to ensure Ês/lot at UE baseband is above the value defined in this table.							

Table 10.1.28.2.2-2: L1-SINR relative accuracy for SSB based CMR and ZP-IMR in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	SSB CMR $\hat{E}s/lot$ ^{Note 2, Note 4}	I_o ^{Note 1} range			
			Minimum I_o		Maximum I_o	
dB	dB	dB	dBm / SCS_{SSB} ^{Note 3}		$dBm/BW_{Channel}$	$dBm/BW_{Channel}$
			$SCS_{SSB} = 120kHz$	$SCS_{SSB} = 240kHz$		
± 3.5	± 4.5	≥ -3	Same value as SSB_RP in Table in B.2.8.2, according to UE Power class, operating band and angle of arrival		N/A	-50
NOTE 1: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth.						
NOTE 2: The parameter SSB CMR $\hat{E}s/lot$ is the minimum SSB CMR $\hat{E}s/lot$ of the pair of SSBs to which the requirement applies.						
NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.						
NOTE 4: In the test cases, the SSB CMR $\hat{E}s/lot$ and related parameters may need to be adjusted to ensure $\hat{E}s/lot$ at UE baseband is above the value defined in this table.						

10.1.28.3 L1-SINR accuracy requirements with CSI-RS based CMR and dedicated IMR configured

10.1.28.3.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of CSI-RS based L1-SINR in this clause apply to all CSI-RS resources as CMR and dedicated resources configured as IMR of the serving cell configured for L1-SINR measurement.

The accuracy requirements are defined in Table 10.1.28.3.1-1 for CSI-RS based CMR and NZP-IMR and in Table 10.1.28.3.1-2 for CSI-RS based CMR and ZP-IMR.

The accuracy requirements in Tables 10.1.28.3.1-1 and 10.1.28.3.1-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.3 for a corresponding Band for each relevant CSI-RS based CMR and IMR.
- The bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- AWGN radio propagation conditions.
- CSI-RS based CMR and IMR in the test come from the same direction.

The performance with larger bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 10.1.28.3.1-1 and 10.1.28.3.1-2.

Table 10.1.28.3.1-1: L1-SINR absolute accuracy for CSI-RS based CMR and NZP-IMR in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	CSI-RS CMR $\hat{E}_s/\text{lot}$ Note 3	NZP-IMR $\hat{E}_s/\text{lot}$ Note 3	I_o Note 1 range		
				Minimum I_o		Maximum I_o
dB	dB	dB	dB	$\text{dBm} / SCS_{\text{CSI-RS}}$ Note 2		$\text{dBm}/BW_{\text{Channel}}$
				$SCS_{\text{CSI-RS}} = 60\text{kHz}$	$SCS_{\text{CSI-RS}} = 120\text{kHz}$	
± 4.0	± 5.0	≥ 0	≥ 0	Same value as CSI-RS_RP in Table in B.2.8.3, according to UE Power class, operating band and angle of arrival		N/A
NOTE 1: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth.						
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.						
NOTE 3: In the test cases, the CSI-RS $\hat{E}_s/\text{lot}$, NZP-IMR $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.						

Table 10.1.28.3.1-2: L1-SINR absolute accuracy for CSI-RS based CMR and ZP-IMR in FR2

Accuracy		Conditions				
Normal condition	Extreme condition	CSI-RS CMR Ês/lot Note 3	Io ^{Note 1} range			
			Minimum Io		Maximum Io	
dB	dB	dB	dBm / SCS _{CSI-RS} ^{Note 2}		dBm/BW _{Channel}	dBm/BW _{Channel}
			SCS _{CSI-RS} = 60kHz	SCS _{CSI-RS} = 120kHz		
±4.5	±5.5	≥-3	Same value as CSI-RS_RP in Table in B.2.8.3, according to UE Power class, operating band and angle of arrival		N/A	-50
NOTE 1: Io specified at the Reference point, and assumed to have constant EPRE across the bandwidth.						
NOTE 2: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.						
NOTE 3: In the test cases, the CSI-RS Ês/lot and related parameters may need to be adjusted to ensure Ês/lot at UE baseband is above the value defined in this table.						

10.1.28.3.2 Relative Accuracy

The relative accuracy of CSI-RS based L1-SINR is defined as the L1-SINR measured from one CSI-RS configured as CMR and one IMR configured as IMR compared to the largest measured value of L1-SINR among all CSI-RS based CMRs and IMRs of the serving cell.

The accuracy requirements are defined in Table 10.1.28.3.2-1 for CSI-RS based CMR and NZP-IMR and in Table 10.1.28.3.2-2 for CSI-RS based CMR and ZP-IMR.

The accuracy requirements in Tables 10.1.28.3.2-1 and 10.1.28.3.2-2 are valid under the following conditions:

- Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.
- Conditions for L1-SINR measurements are fulfilled according to Annex B.2.8.3 for a corresponding Band for each relevant CSI-RS based CMR and IMR.
- The bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is 48 PRBs and the density is 3.
- The measured signals are in the directions covered by the percentile EIS spherical coverage of the UE, defined in clause 7.3.4 of TS 38.101-2 [19].
- AWGN radio propagation conditions.
- CSI-RS based CMR and IMR in the test come from the same direction.

The performance with larger bandwidth of CSI-RS as CMR, NZP-IMR and ZP-IMR is equal to or better than the accuracy requirements in Tables 10.1.28.3.2-1 and 10.1.28.3.2-2.

Table 10.1.28.3.2-1: L1-SINR relative accuracy for CSI-RS based CMR and NZP-IMR in FR2

Accuracy		Conditions					
Normal condition	Extreme condition	CSI-RS CMR $\hat{E}_s/\text{lot}$ Note 2, Note 4	NZP-IMR $\hat{E}_s/\text{lot}$ Note 4	I_o ^{Note 1} range			
				Minimum I_o		Maximum I_o	
dB	dB	dB	dB	$\text{dBm} / SCS_{\text{CSI-RS}}$ ^{Note 3}		$\text{dBm}/BW_{\text{Channel}}$	$\text{dBm}/BW_{\text{Channel}}$
				$SCS_{\text{CSI-RS}} = 60\text{kHz}$	$SCS_{\text{CSI-RS}} = 120\text{kHz}$		
± 3.0	± 4.0	≥ 0	≥ 0	Same value as CSI-RS_RP in Table in B.2.8.3, according to UE Power class, operating band and angle of arrival		N/A	-50
NOTE 1: I_o specified at the Reference point, and assumed to have constant EPRE across the bandwidth.							
NOTE 2: The parameter CSI-RS CMR $\hat{E}_s/\text{lot}$ is the minimum CSI-RS CMR $\hat{E}_s/\text{lot}$ of the pair of CSI-RS resources to which the requirement applies.							
NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.							
NOTE 4: In the test cases, the CSI-RS CMR $\hat{E}_s/\text{lot}$, NZP-IMR $\hat{E}_s/\text{lot}$ and related parameters may need to be adjusted to ensure $\hat{E}_s/\text{lot}$ at UE baseband is above the value defined in this table.							

Table 10.1.28.3.2-2: L1-SINR relative accuracy for CSI-RS based CMR and ZP-IMR in FR2

Accuracy		Conditions		
Normal condition	Extreme condition	CSI-RS CMR $\hat{E}_s/\text{lot}$ Note 2, Note 4	I_o ^{Note 1} range	
			Minimum I_o	Maximum I_o

dB	dB	dB	dBm / SCS _{CSI-RS} ^{Note 3}		dBm/BW _{Channel}	dBm/BW _{Channel}
			SCS _{CSI-RS} = 60kHz	SCS _{CSI-RS} = 120kHz		
±3.5	±4.5	≥-3	Same value as CSI-RS_RP in Table in B.2.8.3, according to UE Power class, operating band and angle of arrival		N/A	-50
NOTE 1: I_0 is specified at the Reference point, and assumed to have constant EPRE across the bandwidth.						
NOTE 2: The parameter CSI-RS CMR $\hat{E}_s/I_0$ is the minimum CSI-RS CMR $\hat{E}_s/I_0$ of the pair of CSI-RS resources to which the requirement applies.						
NOTE 3: Values based on Refsens and EIS spherical coverage as defined in clauses 7.3.2 and 7.3.4 of TS 38.101-2 [19]. Applicable side condition selected depending on angle of arrival.						
NOTE 4: In the test cases, the CSI-RS CMR $\hat{E}_s/I_0$ and related parameters may need to be adjusted to ensure $\hat{E}_s/I_0$ at UE baseband is above the value defined in this table.						

10.1.29 Intra-frequency RSRQ accuracy requirements under CCA

10.1.29.1 Intra-frequency SS-RSRQ accuracy requirements in FR1

10.1.29.1.1 Absolute SS-RSRQ Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on the same frequency as that of the serving cell under CCA.

The accuracy requirements in Table 10.1.29.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant SSB.

Table 10.1.29.1.1-1: SS-RSRQ intra-frequency absolute accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_0$	I_0 ^{Note 1} range				
			NR operating band groups ^{Note 3}	Minimum I_0		Maximum I_0	
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±2.5	±4	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							
NOTE 3: NR operating band groups are as defined in clause 3.5.2.							

10.1.30 Inter-frequency RSRQ accuracy requirements under CCA

10.1.30.1 Inter-frequency SS-RSRQ accuracy requirements in FR1

10.1.30.1.1 Absolute Accuracy of SS-RSRQ

The requirements for absolute accuracy of SS-RSRQ in this clause apply to a cell on a frequency under CCA that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.30.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.10 for a corresponding Band for each relevant SSB.

Table 10.1.30.1.1-1: SS-RSRQ inter-frequency absolute accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	I_o ^{Note 1} range				
			NR operating band groups ^{Note 3}	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
± 2.5	± 4	≥ -3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
± 3.5	± 4	≥ -6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							
NOTE 3: NR operating band groups are as defined in clause 3.5.2.							

10.1.30.1.2 Relative Accuracy of SS-RSRQ

The relative accuracy of SS-RSRQ in inter-frequency case is defined as the RSRQ measured from one cell on a frequency compared to the RSRP measured from another cell on a different frequency, with at least one of the two frequencies being under CCA.

The accuracy requirements in Table 10.1.30.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.10 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{\text{dBm}} - SSB_RP2_{\text{dBm}}| \leq 27 \text{ dB}$
- $|Channel\ 1_I_o - Channel\ 2_I_o| \leq 20 \text{ dB}$

Table 10.1.30.1.2-1: SS-RSRQ inter-frequency relative accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$ ^{Note 2}	I_o ^{Note 1} range				
			NR operating band groups ^{Note 4}	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
± 3	± 4	≥ -3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
± 4	± 4	≥ -6	Note 3	Note 3	Note 3	Note 3	Note 3
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The parameter SSB $\hat{E}_s/\text{lot}$ is the minimum SSB $\hat{E}_s/\text{lot}$ of the pair of cells to which the requirement applies.							
NOTE 3: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							
NOTE 4: NR operating band groups are as defined in clause 3.5.2.							

10.1.31 Intra-frequency SINR accuracy requirements under CCA

10.1.31.1 Intra-frequency SS-SINR accuracy requirements in FR1

10.1.31.1.1 Absolute SS-SINR Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-SINR in this clause apply to a cell on the same frequency as that of the serving cell under CCA.

The accuracy requirements in Table 10.1.31.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band.

Table 10.1.31.1.1-1: SS-SINR intra-frequency absolute accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/lot Note 3	I _o ^{Note 1} range				
			NR operating band groups ^{Note 4}	Minimum I _o			Maximum I _o
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±3.0	±4	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
±3.5	±4	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: I _o is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The same bands and the same I _o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							
NOTE 3: The requirements apply for SSB Ês/lot ≤ 25 dB.							
NOTE 4: NR operating band groups are as defined in clause 3.5.2.							

10.1.32 Inter-frequency SINR accuracy requirements under CCA

10.1.32.1 Inter-frequency SS-SINR accuracy requirements in FR1

10.1.32.1.1 Absolute Accuracy of SS-SINR

The requirements for absolute accuracy of SS-SINR in this clause apply to a cell on a frequency under CCA that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.32.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.10 for a corresponding Band.

Table 10.1.32.1.1-1: SS-SINR inter-frequency absolute accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/lot Note 3	I _o ^{Note 1} range				
			NR operating band groups ^{Note 4}	Minimum I _o			Maximum I _o
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
			NR_CCA_ER1_I	-117	-114	N/A	-50

± 3.0	± 4	≥ -3	NR_CCA_FR1_J	116.5	-113.5		
± 3.5	± 4	≥ -6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							
NOTE 3: The requirements apply for SSB $\hat{E}_s/I_{ot} \leq 25$ dB.							
NOTE 4: NR operating band groups are as defined in clause 3.5.2.							

10.1.32.1.2 Relative Accuracy of SS-SINR

The relative accuracy of SS-SINR in inter frequency case is defined as the SS-SINR measured from one cell on a frequency compared to the SS-SINR measured from another cell on a different frequency, with at least one of the two frequencies being under CCA.

The accuracy requirements in Table 10.1.32.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band.
- $SSB_RP1_{dBm} - SSB_RP2_{dBm} \leq 27$ dB
- $|Channel\ 1_I_o - Channel\ 2_I_o| \leq 20$ dB

Table 10.1.32.1.2-1: SS-SINR inter-frequency relative accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$ Note 2,4	I_o Note 1 range				
			NR operating band groups Note 5	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				$SCS_{SSB} = 120$ kHz	$SCS_{SSB} = 240$ kHz		
± 3.5	± 4	≥ -3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
± 4	± 4	≥ -6	Note 3	Note 3	Note 3	Note 3	Note 3
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The parameter SSB $\hat{E}_s/I_{ot}$ is the minimum SSB $\hat{E}_s/I_{ot}$ of the pair of cells to which the requirement applies.							
NOTE 3: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							
NOTE 4: The requirements apply for SSB $\hat{E}_s/I_{ot} \leq 25$ dB.							
NOTE 5: NR operating band groups are as defined in clause 3.5.2.							

10.1.33 L1-RSRP accuracy requirements under CCA

10.1.33.1 SSB based L1-RSRP accuracy requirements in FR1

10.1.33.1.1 Absolute Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SSB based L1-RSRP in this clause apply to all SSBs of the serving cell configured for L1-RSRP measurement under CCA.

The accuracy requirements in Table 10.1.33.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.10.1 for a corresponding Band for each relevant SSB.

Table 10.1.33.1.1-1: SSB based L1-RSRP absolute accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	I_o ^{Note 1} range				
			NR operating band groups ^{Note 2}	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
± 5.0	± 9.5	≥ -3	NR_CCA_FR1_I	-117	-114	N/A	-70
			NR_CCA_FR1_J	-116.5	-113.5		
± 8.5	± 11.5	≥ -3	NR_CCA_FR1_I	N/A	N/A	-70	-50
			NR_CCA_FR1_J				

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups are as defined in clause 3.5.2.

10.1.33.1.2 Relative Accuracy

The relative accuracy of SSB based L1-RSRP is defined as the L1-RSRP measured from one SSB compared to the largest measured value of L1-RSRP among all SSBs of the serving cell under CCA.

The accuracy requirements in Table 10.1.33.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.10.1 for a corresponding Band for each relevant SSB.

Table 10.1.33.1.2-1: SSB based L1-RSRP relative accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$ ^{Note 2}	I_o ^{Note 1} range				
			NR operating band groups ^{Note 3}	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
± 3	± 4	≥ -3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB $\hat{E}_s/\text{lot}$ is the minimum SSB $\hat{E}_s/\text{lot}$ of the pair of SSBs to which the requirement applies.
NOTE 3: NR operating band groups are as defined in clause 3.5.2.

10.1.34 RSSI measurements under CCA

10.1.34.1 Intra-frequency absolute RSSI measurement accuracy requirements in FR1

The accuracy requirements for intra-frequency RSSI measurements on a carrier frequency under CCA are specified in Table 10.1.34.1-1. The requirements apply for any configured RSSI *measDuration* [2], provided that:

- All symbols during each RSSI measurement duration are available for RSSI sampling within the same reporting interval.

The intra-frequency RSSI measurement bandwidth is the channel bandwidth defined in Clause 4 of TS 37.213 [33], where the channel has the center frequency configured by *ARFCN-value_{NR}*.

Table 10.1.34.1-1: Intra-frequency RSSI accuracy under CCA

Accuracy		Conditions			
Normal condition	Extreme condition	I_o ^{Note 1} range			
		NR operating band groups ^{Note 2}	Minimum I_o		Maximum I_o
dB	dB		dBm / SCS_{SSB}		dBm/BW _{Channel}
			$SCS_{SSB} = 15$ kHz	$SCS_{SSB} = 30$ kHz	
[±3.5]	[±6.5]	NR_CCA_FR1_I	-117	-114	N/A
		NR_CCA_FR1_J	-116.5	-113.5	
[±5.5]	[±8.5]	NR_CCA_FR1_I	N/A	N/A	-70
		NR_CCA_FR1_J			

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups are as defined in clause 3.5.2.

10.1.34.2 Inter-frequency absolute RSSI measurement accuracy requirements in FR1

The accuracy requirements for inter-frequency RSSI measurements on a carrier frequency under CCA are the same as specified in clause 10.1.34.1.

The inter-frequency RSSI measurement bandwidth is the channel bandwidth defined in Clause 4 of TS 37.213 [33], where the channel has the center frequency configured by *ARFCN-value_{NR}*.

10.1.34.3 RSSI measurement report mapping

The reporting range of RSSI measurement is defined from -100 dBm to -25 dBm with 1 dBm resolution.

The mapping of the measured quantity is defined in Table 10.1.34.3-1. The range in the signalling may be larger than the guaranteed accuracy range, provided that the following condition is met:

the RSSI measurement bandwidth is the channel bandwidth defined in Clause 4 of TS 37.213 [33], where the channel has the center frequency configured by *ARFCN-value_{NR}*.

Table 10.1.34.3-1: RSSI measurement report mapping

Reported value	Measured quantity value	Unit
RSSI_00	$RSSI < -100$	dBm
RSSI_01	$-100 \leq RSSI < -99$	dBm
RSSI_02	$-99 \leq RSSI < -98$	dBm
...	...	...
RSSI_74	$-27 \leq RSSI < -26$	dBm
RSSI_75	$-26 \leq RSSI < -25$	dBm
RSSI_76	$-25 \leq RSSI$	dBm

10.1.35 Channel occupancy measurements under CCA

10.1.35.1 Intra-frequency channel occupancy measurement accuracy requirements in FR1

The UE shall be able to correctly evaluate the intra-frequency channel occupancy configured according to TS 38.331 [2], provided that the following conditions are met:

- All symbols during each RSSI measurement duration are available for RSSI sampling within the same reporting interval,
- RSSI at the UE receiver meets the following condition with respect to the configured *channelOccupancyThreshold* [2]:

- RSSI at the UE receiver is below $channelOccupancyThreshold - \Delta_{RSSI}$, or
- RSSI at the UE receiver is above $channelOccupancyThreshold + \Delta_{RSSI}$,
- where Δ_{RSSI} is the applicable RSSI measurement accuracy value from the RSSI measurement accuracy requirements specified in clause 10.1.34.1.

The channel occupancy measurement bandwidth is the same as the RSSI measurement bandwidth in Clause 10.1.34.1.

10.1.35.2 Inter-frequency channel occupancy measurement accuracy requirements in FR1

The UE shall be able to correctly evaluate the inter-frequency channel occupancy configured according to TS 38.331 [2], provided that the following conditions are met:

- All symbols during each RSSI measurement duration are available for RSSI sampling within the same reporting interval,
- RSSI at the UE receiver meets the following condition with respect to the configured $channelOccupancyThreshold$ [2]:
 - RSSI at the UE receiver is below $channelOccupancyThreshold - \Delta_{RSSI}$, or
 - RSSI at the UE receiver is above $channelOccupancyThreshold + \Delta_{RSSI}$,
- where Δ_{RSSI} is the applicable RSSI measurement accuracy value from the RSSI measurement accuracy requirements specified in clause 10.1.34.2.

The channel occupancy measurement bandwidth is the same as the RSSI measurement bandwidth in Clause 10.1.34.2.

10.1.36 Intra-frequency RSRP accuracy requirements under CCA

10.1.36.1 Intra-frequency SS-RSRP accuracy requirements in FR1

10.1.36.1.1 Absolute SS-RSRP Accuracy

Unless otherwise specified, the requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on the same frequency as that of the serving cell under CCA.

The accuracy requirements in Table 10.1.36.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant SSB.

Table 10.1.36.1.1-1: SS-RSRP intra-frequency absolute accuracy

Accuracy		Conditions				
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	I_o ^{Note 1} range			
			NR operating band groups ^{Note 2}	Minimum I_o		Maximum I_o
dB	dB	dB		dBm / SCS_{SSB}	dBm/BW _{Channel}	dBm/BW _{Channel}

				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±4.5	±9	≥-6	NR_CCA_FR1_I	-117	-114	N/A	-70
			NR_CCA_FR1_J	-116.5	-113.5		
±8	±11	≥-6	NR_CCA_FR1_I	N/A	N/A	-70	-50
			NR_CCA_FR1_J				

NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.

NOTE 2: NR operating band groups are as defined in clause 3.5.2.

10.1.36.1.2 Relative SS-RSRP Accuracy

The relative accuracy of SS-RSRP is defined as the SS-RSRP measured from one cell compared to the SS-RSRP measured from another cell on the same frequency, or between any two SS-RSRP levels measured on the same cell under CCA.

The accuracy requirements in Table 10.1.36.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.8 for a corresponding Band for each relevant SSB.

Table 10.1.36.1.2-1: SS-RSRP intra-frequency relative accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$ Note 2	I_0 Note 1 range				
			NR operating band groups Note 4	Minimum I_0		Maximum I_0	
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±2	±3	≥-3	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		
±3	±3	≥-6	Note 3	Note 3	Note 3	N/A	Note 3

NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.

NOTE 2: The parameter SSB $\hat{E}_s/I_{ot}$ is the minimum SSB $\hat{E}_s/I_{ot}$ of the pair of cells to which the requirement applies.

NOTE 3: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.

NOTE 4: NR operating band groups are as defined in clause 3.5.2.

10.1.37 Inter-frequency RSRP accuracy requirements under CCA

10.1.37.1 Inter-frequency SS-RSRP accuracy requirements in FR1

10.1.37.1.1 Absolute Accuracy of SS-RSRP

The requirements for absolute accuracy of SS-RSRP in this clause apply to a cell on a frequency under CCA that has different carrier frequency from the serving cell.

The accuracy requirements in Table 10.1.37.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant SSB.

Table 10.1.37.1.1-1: SS-RSRP inter-frequency absolute accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	I_o ^{Note 1} range				
			NR operating band groups ^{Note 2}	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
± 4.5	± 9	≥ -6	NR_CCA_FR1_I	-117	-114	N/A	-70
			NR_CCA_FR1_J	-116.5	-113.5		
± 8	± 11	≥ -6	NR_CCA_FR1_I	N/A	N/A	-70	-50
			NR_CCA_FR1_J				

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups are as defined in clause 3.5.2.

10.1.37.1.2 Relative Accuracy of SS-RSRP

The relative accuracy of SS-RSRP in inter frequency case is defined as the RSRP measured from one cell on a frequency compared to the RSRP measured from another cell on a different frequency, with at least one of the two frequencies being under CCA.

The accuracy requirements in Table 10.1.37.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3F of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.9 for a corresponding Band for each relevant SSB.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27 \text{ dB}$
- $|Channel\ 1_I_o - Channel\ 2_I_o| \leq 20 \text{ dB}$

Table 10.1.37.1.2-1: SS-RSRP inter-frequency relative accuracy under CCA

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$ ^{Note 2}	I_o ^{Note 1} range				
			NR operating band groups ^{Note 3}	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
± 4.5	± 6	≥ -6	NR_CCA_FR1_I	-117	-114	N/A	-50
			NR_CCA_FR1_J	-116.5	-113.5		

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB $\hat{E}_s/\text{lot}$ is the minimum SSB $\hat{E}_s/\text{lot}$ of the pair of cells to which the requirement applies.
NOTE 3: NR operating band groups are as defined in clause 3.5.2.

10.1.38 PRS-RSRPP Measurements

10.1.38.1 Introduction

The requirements in Clause 10.1.38.2 shall apply, provided the UE has received *nr-DL-AoD-RequestLocationInformation* message from LMF via LPP [34] requesting the UE to report one or more DL PRS-RSRPP measurements defined in TS 38.215 [4]. The requirements in Clause 10.1.38 shall apply:

- when UE is in RRC_CONNECTED state,

- when UE is in RRC_INACTIVE state.

The requirements in Clause 10.1.38.2 apply for the first path PRS-RSRP measurement.

10.1.38.2 Measurement Accuracy Requirements

10.1.38.2.1 Absolute PRS RSRPP accuracy

The absolute accuracy requirements for PRS-RSRPP measurement for FR1 defined in Table 10.1.38.2.1-1 and Table 10.1.38.2.1-3 are valid under the following conditions:

- Conditions defined in 38.101-1 Clause 7.3 for reference sensitivity are fulfilled.
- PRP 1,2_{dBm} according to Annex B.2.14 for a corresponding Band

The absolute accuracy requirements for PRS-RSRPP measurement for FR2 defined in Table 10.1.38.2.1-2 and Table 10.1.38.2.1-4 are valid under the following conditions:

- Conditions defined in 38.101-2 Clause 7.3 for reference sensitivity are fulfilled.
- PRP 1,2_{dBm} according to Annex B.2.14 for a corresponding Band

The absolute accuracy requirements for PRS-RSRPP measurement defined in Table 10.1.38.2.1-1 and Table 10.1.38.2.1-2 apply for the UE not supporting *supportedDL-PRS-ProcessingSamples* [34] or LMF does not indicate UE to perform positioning measurements with reduced number of samples.

The absolute accuracy requirements for PRS-RSRPP measurement defined in Table 10.1.38.2.1-3 and Table 10.1.38.2.1-4 apply for the UE supporting *supportedDL-PRS-ProcessingSamples* [34].

Note: The requirements in this clause are derived based on two-tap channel defined in 38.101-4 Annex B.2.4 ($\alpha = 1$, $\tau_d = 0.45 \mu s$ and $f_D = 5 \text{ Hz}$).

Note: The requirements in this clause are derived based on the difference between the estimated PRS-RSRPP compared to the ideal PRS-RSRPP defined as

$$\text{RSRPP}_p \propto \left| \sum_k H_k \exp \left(j 2 \pi D_p \frac{k}{N_{\text{IFFT}}} \right) \right|^2$$

Where:

H_k is the effective channel frequency response (over REs occupied by PRS) measured without receiver noise.

D_p is the exact delay of the p-th path in the channel model.

Table 10.1.38.2.1-1: PRS-RSRPP absolute accuracy for FR1

Accuracy		Conditions							
Normal condition	Extreme condition	PRS Es/lot	PRS BW	Repetition factor ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$)	Io ^{Note 7} range				
					NR operating band groups ^{Note 8}	Minimum Io ^{Note 1} dBm / SCS _{PRS}			Maximum Io
						dBm / SCS _{PRS}			
dB	dB	dB	PRB	-		dBm / SCS _{PRS}			dBm/BW _{Channel}
						dBm/15kHz ^{Note 6}	dBm/30kHz ^{Note 6}	dBm/60kHz ^{Note 6}	
±4.1	±8.6	≥-3	≥24	All	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	-121	-50

					NR_FDD_FR1_B	-126.5	-123.5	-120.5	-50
					NR_TDD_FR1_C	-126	-123	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	-119	-50
					NR_FDD_FR1_F	-124.5	-121.5	-118.5	-50
					NR_FDD_FR1_G	-124	-121	-118	-50
					NR_FDD_FR1_H	-123.5	-120.5	-117.5	-50
					Note 4				
					Note 4				
±5.8	±10.3	≥-13	24 ≤ BW ≤ 52	All	Note 4				
±4.9	±9.4		BW > 52	All	Note 4				
NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol. NOTE 2: Void. NOTE 3: PRS bandwidth is as indicated in <i>prs-Bandwidth</i> in the DL-TDOA or DL-AoD assistance data defined in [34]. NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 24 RB. NOTE 5: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency. NOTE 6: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3. NOTE 7: The Io is defined in PRS positioning subframes. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same subframe. NOTE 8: NR operating band groups are as defined in Section 3.5.2.									

Table 10.1.38.2.1-2: PRS-RSRPP absolute accuracy for FR2

Accuracy		Conditions					
Normal condition	Extreme condition	PRS Es/Iot	PRS BW	Repetition factor (T ^{PRS} _{rep} * L ^{PRS} _{PRS} / K ^{PRS} _{comb})	Io ^{Note 7} range		
					Minimum Io ^{Note 1} dBm / SCS ^{PRS}		Maximum Io
dB	dB	dB	PRB	-	dBm / SCS ^{PRS}		dBm/BW ^{Chan} nel
					dBm/120kH z ^{Note 6}	dBm/60kHz ^{Note 6}	
±6.0	±9.0	≥-3	≥24	All	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival		-50
					Note 4		
					Note 4		
±7.3	±10.3	≥-13	24 ≤ BW ≤ 64	All	Note 4		
±6.2	±9.2		BW >64	All	Note 4		
NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol. NOTE 2: Void. NOTE 3: PRS bandwidth is as indicated in <i>prs-Bandwidth</i> in the DL-TDOA or DL-AoD assistance data defined in [34]. NOTE 4: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 24 RB. NOTE 5: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency. NOTE 6: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3.							

NOTE 7: The I_o is defined in PRS positioning subframes. The same I_o range applies to PRS and non-PRS symbols. I_o levels are different in PRS and non-PRS symbols within the same subframe.

NOTE 8: NR operating band groups are as defined in Section 3.5.2.

Table 10.1.38.2.1-3: PRS-RSRPP absolute accuracy for FR1 for reduced number of samples

Accuracy		Conditions							
Normal condition	Extreme condition	PRS $\hat{E}_s/\text{lot}$	PRS BW	Repetition factor ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$)	I_o ^{Note 7} range				
					NR operating band groups ^{Note 8}	Minimum I_o ^{Note 1} dBm / SCS _{PRS}			Maximum I_o
dB	dB	dB	PRB	-		dBm / SCS _{PRS}			dBm/BW _{Channel}
						dBm/15kHz ^{Note 6}	dBm/30kHz ^{Note 6}	dBm/60kHz ^{Note 6}	
±3.9	±8.4	≥0	≥48	All	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	-121	-50
					NR_FDD_FR1_B	-126.5	-123.5	-120.5	-50
					NR_TDD_FR1_C	-126	-123	-120	-50
					NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	-119.5	-50
					NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	-119	-50
					NR_FDD_FR1_F	-124.5	-121.5	-118.5	-50
					NR_FDD_FR1_G	-124	-121	-118	-50
					NR_FDD_FR1_H	-123.5	-120.5	-117.5	-50
					Note 4				
					Note 4				
±4.2	±8.7	≥-6	48 ≤ BW ≤ 52	All	Note 4				
±4.1	±8.6		BW >52	All	Note 4				

NOTE 1: This minimum I_o condition is expressed as the average I_o per RE over all REs in an OFDM symbol.

NOTE 2: Void.

NOTE 3: PRS bandwidth is as indicated in *prs-Bandwidth* in the DL-TDOA or DL-AoD assistance data defined in [34].

NOTE 4: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 48 RB.

NOTE 5: The serving cell, the reference cell, and the measured neighbour cell i are on the same carrier frequency.

NOTE 6: The condition level is increased by $\Delta > 0$, when applicable, as described in Sections B.3.2 and B.3.3.

NOTE 7: The I_o is defined in PRS positioning subframes. The same I_o range applies to PRS and non-PRS symbols. I_o levels are different in PRS and non-PRS symbols within the same subframe.

NOTE 8: NR operating band groups are as defined in Section 3.5.2.

Table 10.1.38.2.1-4: PRS-RSRPP absolute accuracy for FR2 for reduced number of samples

Accuracy		Conditions				
Normal condition	Extreme condition	PRS Ês/lot	PRS BW	Repetition factor ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$)	Io ^{Note 7} range	
					Minimum Io ^{Note 1} dBm / SCS _{PRS}	Maximum Io

dB	dB	dB	PRB	-	dBm / SCS _{PRS}		dBm/BW _{Channel}
					dBm/120kHz _z Note 6	dBm/60kHz _{Note 6}	
±5.9	±8.9	≥0	≥48	All	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival		-50
					Note 4		
					Note 4		
±5.6	±8.6	≥-6	48 ≤ BW ≤ 64	All	Note 4		
±5.4	±8.4		BW >64	All	Note 4		
NOTE 1: This minimum <i>Io</i> condition is expressed as the average <i>Io</i> per RE over all REs in an OFDM symbol. NOTE 2: Void. NOTE 3: PRS bandwidth is as indicated in <i>prs-Bandwidth</i> in the DL-TDOA or DL-AoD assistance data defined in [34]. NOTE 4: The same bands and the same <i>Io</i> conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth ≥ 48 RB. NOTE 5: The serving cell, the reference cell, and the measured neighbour cell <i>i</i> are on the same carrier frequency. NOTE 6: The condition level is increased by Δ>0, when applicable, as described in Sections B.3.2 and B.3.3. NOTE 7: The <i>Io</i> is defined in PRS positioning subframes. The same <i>Io</i> range applies to PRS and non-PRS symbols. <i>Io</i> levels are different in PRS and non-PRS symbols within the same subframe. NOTE 8: NR operating band groups are as defined in Section 3.5.2.							

10.1.38.3 Report mapping

10.1.38.3.1 Absolute PRS-RSRPP Measurement Report Mapping

The reporting range of absolute PRS-RSRPP measurement is defined from -156 dBm to -31 dBm with 1 dB resolution.

The mapping of measured quantity is defined in Table 10.1.38.3.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

The UE capable of *additionalPathsExtSupport-r17* can report the PRS-RSRPP measurement of up to its supported number of additional paths.

Table 10.1.38.3.1-1: Measurement report mapping for PRS-RSRPP

Reported value	Measured quantity value	Unit
PRS_RSRPP_0	PRS-RSRPP<-156	dBm
PRS_RSRPP_1	-156≤PRS-RSRPP<-155	dBm
PRS_RSRPP_2	-155≤PRS-RSRPP<-154	dBm
PRS_RSRPP_3	-154≤PRS-RSRPP<-153	dBm
PRS_RSRPP_4	-153≤PRS-RSRPP<-152	dBm
PRS_RSRPP_5	-152≤PRS-RSRPP<-151	dBm
PRS_RSRPP_6	-151≤PRS-RSRPP<-150	dBm
PRS_RSRPP_7	-150≤PRS-RSRPP<-149	dBm
PRS_RSRPP_8	-149≤PRS-RSRPP<-148	dBm
PRS_RSRPP_9	-148≤PRS-RSRPP<-147	dBm
PRS_RSRPP_10	-147≤PRS-RSRPP<-146	dBm
PRS_RSRPP_11	-146≤PRS-RSRPP<-145	dBm
PRS_RSRPP_12	-145≤PRS-RSRPP<-144	dBm
PRS_RSRPP_13	-144≤PRS-RSRPP<-143	dBm
PRS_RSRPP_14	-143≤PRS-RSRPP<-142	dBm

PRS_RSRPP_15	$-142 \leq \text{PRS-RSRPP} < -141$	dBm
PRS_RSRPP_16	$-141 \leq \text{PRS-RSRPP} < -140$	dBm
PRS_RSRPP_17	$-140 \leq \text{PRS-RSRPP} < -139$	dBm
PRS_RSRPP_18	$-139 \leq \text{PRS-RSRPP} < -138$	dBm
...	...	...
PRS_RSRPP_111	$-46 \leq \text{PRS-RSRPP} < -45$	dBm
PRS_RSRPP_112	$-45 \leq \text{PRS-RSRPP} < -44$	dBm
PRS_RSRPP_113	$-44 \leq \text{PRS-RSRPP} < -43$	dBm
PRS_RSRPP_114	$-43 \leq \text{PRS-RSRPP} < -42$	dBm
PRS_RSRPP_115	$-42 \leq \text{PRS-RSRPP} < -41$	dBm
PRS_RSRPP_116	$-41 \leq \text{PRS-RSRPP} < -40$	dBm
PRS_RSRPP_117	$-40 \leq \text{PRS-RSRPP} < -39$	dBm
PRS_RSRPP_118	$-39 \leq \text{PRS-RSRPP} < -38$	dBm
PRS_RSRPP_119	$-38 \leq \text{PRS-RSRPP} < -37$	dBm
PRS_RSRPP_120	$-37 \leq \text{PRS-RSRPP} < -36$	dBm
PRS_RSRPP_121	$-36 \leq \text{PRS-RSRPP} < -35$	dBm
PRS_RSRPP_122	$-35 \leq \text{PRS-RSRPP} < -34$	dBm
PRS_RSRPP_123	$-34 \leq \text{PRS-RSRPP} < -33$	dBm
PRS_RSRPP_124	$-33 \leq \text{PRS-RSRPP} < -32$	dBm
PRS_RSRPP_125	$-32 \leq \text{PRS-RSRPP} < -31$	dBm
PRS_RSRPP_126	$-31 \leq \text{PRS-RSRPP}$	dBm

10.1.38.3.2 Differential Report Mapping for PRS-RSRPP Measurement

The reporting range of differential PRS-RSRPP is defined from -30 dB to 30 dB with 1 dB resolution.

The mapping of measured quantity is defined in Table 10.1.38.3.2-1. The range in the signalling may be larger than the guaranteed accuracy range.

For differential reporting, PRS-RSRPP is reported as the difference in dB with respect to the first reported PRS-RSRPP.

Table 10.1.38.3.2-1: Measurement report mapping for differential PRS-RSRPP

Reported value	Measured quantity value	Unit
DIFFRSRPP_0	$-30 \geq \Delta \text{RSRPP}$	dB
DIFFRSRPP_1	$-29 \geq \Delta \text{RSRPP} > -30$	dB
DIFFRSRPP_2	$-28 \geq \Delta \text{RSRPP} > -29$	dB
DIFFRSRPP_3	$-27 \geq \Delta \text{RSRPP} > -28$	dB
DIFFRSRPP_4	$-26 \geq \Delta \text{RSRPP} > -27$	dB
DIFFRSRPP_5	$-25 \geq \Delta \text{RSRPP} > -26$	dB
DIFFRSRPP_6	$-24 \geq \Delta \text{RSRPP} > -25$	dB
DIFFRSRPP_7	$-23 \geq \Delta \text{RSRPP} > -24$	dB
DIFFRSRPP_8	$-22 \geq \Delta \text{RSRPP} > -23$	dB
DIFFRSRPP_9	$-21 \geq \Delta \text{RSRPP} > -22$	dB
DIFFRSRPP_10	$-20 \geq \Delta \text{RSRPP} > -21$	dB
DIFFRSRPP_11	$-19 \geq \Delta \text{RSRPP} > -20$	dB
DIFFRSRPP_12	$-18 \geq \Delta \text{RSRPP} > -19$	dB
DIFFRSRPP_13	$-17 \geq \Delta \text{RSRPP} > -18$	dB
DIFFRSRPP_14	$-16 \geq \Delta \text{RSRPP} > -17$	dB
...	...	...
DIFFRSRPP_25	$-5 \geq \Delta \text{RSRPP} > -6$	dB
DIFFRSRPP_26	$-4 \geq \Delta \text{RSRPP} > -5$	dB
DIFFRSRPP_27	$-3 \geq \Delta \text{RSRPP} > -4$	dB
DIFFRSRPP_28	$-2 \geq \Delta \text{RSRPP} > -3$	dB

DIFFRSRPP_29	$-1 \geq \Delta \text{RSRPP} > -2$	dB
DIFFRSRPP_30	$0 \geq \Delta \text{RSRPP} > -1$	dB
DIFFRSRPP_31	$1 \geq \Delta \text{RSRPP} > 0$	dB
DIFFRSRPP_32	$2 \geq \Delta \text{RSRPP} > 1$	dB
DIFFRSRPP_33	$3 \geq \Delta \text{RSRPP} > 2$	dB
DIFFRSRPP_34	$4 \geq \Delta \text{RSRPP} > 3$	dB
DIFFRSRPP_35	$5 \geq \Delta \text{RSRPP} > 4$	dB
DIFFRSRPP_36	$6 \geq \Delta \text{RSRPP} > 5$	dB
...	...	...
DIFFRSRPP_47	$17 \geq \Delta \text{RSRPP} > 16$	dB
DIFFRSRPP_48	$18 \geq \Delta \text{RSRPP} > 17$	dB
DIFFRSRPP_49	$19 \geq \Delta \text{RSRPP} > 18$	dB
DIFFRSRPP_50	$20 \geq \Delta \text{RSRPP} > 19$	dB
DIFFRSRPP_51	$21 \geq \Delta \text{RSRPP} > 20$	dB
DIFFRSRPP_52	$22 \geq \Delta \text{RSRPP} > 21$	dB
DIFFRSRPP_53	$23 \geq \Delta \text{RSRPP} > 22$	dB
DIFFRSRPP_54	$24 \geq \Delta \text{RSRPP} > 23$	dB
DIFFRSRPP_55	$25 \geq \Delta \text{RSRPP} > 24$	dB
DIFFRSRPP_56	$26 \geq \Delta \text{RSRPP} > 25$	dB
DIFFRSRPP_57	$27 \geq \Delta \text{RSRPP} > 26$	dB
DIFFRSRPP_58	$28 \geq \Delta \text{RSRPP} > 27$	dB
DIFFRSRPP_59	$29 \geq \Delta \text{RSRPP} > 28$	dB
DIFFRSRPP_60	$30 \geq \Delta \text{RSRPP} > 29$	dB
DIFFRSRPP_61	$\Delta \text{RSRPP} > 30$	dB

10.1.39 UE Rx-Tx time difference measurements for RTT-based PDC

10.1.39.1 Void

10.1.39.2 Measurement Accuracy Requirements for PRS

The error in the reported value of UE Rx-Tx time difference measurement, including both the measurement error and the reporting quantization error, shall be within the accuracy requirements specified in this clause.

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall not apply, if:

- $N_{\text{TA_offset}}$ defined in Table 7.1.2-2 changes during the UE Rx-Tx measurement period or
- if the uplink transmission timing changes during the UE Rx-Tx measurement period due to the network-configured Timing Advance.

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that:

- The UE transmits SRS within [-160, 160] msec of at least one PDC DL PRS resource from the serving cell (PCell).

When a serving cell change occurs during the UE Rx-Tx measurement period, the UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that the serving cell change does not impact SRS configuration for the UE Rx-Tx measurement.

The accuracy requirements in Table 10.1.39.2-1 for FR1 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

PRP_{dBm} according to Annex B.2.14 for a corresponding Band.

AWGN propagation condition.

Table 10.1.39.2-1: UE Rx-Tx time difference measurement accuracy in FR1 in AWGN

Accuracy	Conditions						
	PRS Es/lot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition ($T_{\text{rep}}^{\text{PRS}} * L_{\text{PRS}} / K_{\text{comb}}^{\text{PRS}}$ ^{Note 3})	NR operating band groups ^{Note 2}	Io ^{Note 4} range	
T_c ^{Note 5}	dB	RB	kHz			Minimum Io ^{Note 1}	Maximum Io
						dBm / SCS _{PRS}	dBm/BW
$\pm [78+\delta+\epsilon]$	-3	$\geq [24]$	15	$\geq [4]$	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
					NR_FDD_FR1_B	-120.5	
					NR_TDD_FR1_C	-120	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-119	
					NR_FDD_FR1_F	-118.5	
					NR_FDD_FR1_G	-118	
					NR_FDD_FR1_H	-117.5	
$\pm [59+\delta+\epsilon]$		$\geq [52]$	30	$\geq [1]$	Note 6	NOTE 6	NOTE 6
$\pm [30+\delta+\epsilon]$		$> [104]$		$\geq [1]$	Note 6	NOTE 6	NOTE 6
$\pm [57+\delta+\epsilon]$		$\geq [24]$	30	$\geq [4]$	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-118	-50
					NR_FDD_FR1_B	-117.5	
					NR_TDD_FR1_C	-117	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-116.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-116	
					NR_FDD_FR1_F	-115.5	
					NR_FDD_FR1_G	-115	
					NR_FDD_FR1_H	-114.5	
$\pm [30+\delta+\epsilon]$		$\geq [48]$	60	$\geq [1]$	NOTE 6	NOTE 6	NOTE 6
$\pm [15+\delta+\epsilon]$		$\geq [132]$		$\geq [1]$	NOTE 6	NOTE 6	NOTE 6
$\pm [29+\delta+\epsilon]$		$\geq [24]$	60	$\geq [4]$	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-115	-50
					NR_FDD_FR1_B	-114.5	
					NR_TDD_FR1_C	-114	
					NR_FDD_FR1_D, NR_TDD_FR1_D	-113.5	
					NR_FDD_FR1_E, NR_TDD_FR1_E	-113	
					NR_FDD_FR1_F	-113.5	
					NR_FDD_FR1_G	-113	
					NR_FDD_FR1_H	-111.5	
$\pm [15+\delta+\epsilon]$		$\geq [64]$		$\geq [1]$	NOTE 6	NOTE 6	NOTE 6
$\pm [7+\delta+\epsilon]$		$\geq [132]$		$\geq [1]$	NOTE 6	NOTE 6	NOTE 6

NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.

NOTE 2: NR operating band groups are as defined in Section 3.5.

NOTE 3: $T_{\text{rep}}^{\text{PRS}}$, L_{PRS} , $K_{\text{comb}}^{\text{PRS}}$ are configured by higher layer parameter *dl-PRS-ResourceRepetitionFactor*, *dl-PRS-NumSymbols* and *dl-PRS-CombSizeN* defined in TS 37.355 [34].

NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot.

NOTE 5: T_c is the basic timing unit defined in TS 38.211 [6].

NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.

NOTE 7: δ is the margin determined from Table 10.1.39.2-3.

NOTE 8: ϵ is the margin for reporting quantization error and $\epsilon=16 T_c$.

The accuracy requirements in Table 10.1.39.2-2 for FR2 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

$PRP|_{dBm}$ according to Annex B.2.14 for a corresponding Band.

AWGN propagation condition.

Table 10.1.39.2-2: UE Rx-Tx time difference measurement accuracy in FR2 in AWGN

Accuracy	Conditions					
	PRS Es/lot	Minimum PRS bandwidth	PRS SCS	PRS resource repetition ($T_{rep}^{PRS} * L_{PRS} /$ K_{comb}^{PRS} Note 3)	Io ^{Note 4} range	
					Minimum Io ^{Note 1}	Maximum Io
Tc ^{Note 5}	dB	RB	kHz		dBm / SCS _{PRS}	dBm/BW _{Channel}
± [22+δ+ε]	-3	≥[24]	60	≥[1]	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
± [15+δ+ε]		≥[64]		≥[1]	NOTE 6	NOTE 6
± [7+δ+ε]		≥[132]		≥[1]	NOTE 6	NOTE 6
± [12+δ+ε]		≥[32]	120	≥[1]	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
± [7+δ+ε]		≥[64]		≥[1]	NOTE 6	NOTE 6
± [4+δ+ε]		≥[128]		≥[1]	NOTE 6	NOTE 6
NOTE 1: This minimum Io condition is expressed as the average Io per RE over all REs in an OFDM symbol.						
NOTE 2: NR operating band groups are as defined in Section 3.5.						
NOTE 3: T_{rep}^{PRS} , L_{PRS} , K_{comb}^{PRS} are configured by higher layer parameter dl-PRS-ResourceRepetitionFactor, dl-PRS-NumSymbols and dl-PRS-CombSizeN defined in TS 37.355 [34].						
NOTE 4: The Io is defined in PRS slots. The same Io range applies to PRS and non-PRS symbols. Io levels are different in PRS and non-PRS symbols within the same slot.						
NOTE 5: Tc is the basic timing unit defined in TS 38.211 [6].						
NOTE 6: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding requirement with the PRS bandwidth of the smallest RB number for the corresponding SCS.						
NOTE 7: δ is the margin determined from Table 10.1.39.2-4.						
NOTE 8: ε is the margin for reporting quantization error and ε=16 Tc.						

Table 10.1.39.2-3: Margin for UE Rx-Tx time difference measurement accuracy in FR1

Min(PRS BW, SRS BW) (RB)			Margin (Tc ^{Note 1})
SCS = 15 kHz	SCS = 30 kHz	SCS = 60 kHz	
≥ 24	N/A	N/A	160
≥ 52	≥ 24	N/A	80
≥ 104	≥ 48	≥ 24	56
N/A	≥ 132	≥ 64	24
N/A	N/A	≥ 132	24
NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6].			
NOTE 2: If SRS and PRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.			

Table 10.1.39.2-4: Margin for UE Rx-Tx time difference measurement accuracy in FR2

Min(PRS BW, SRS BW) (MHz)		Margin (Tc ^{Note 1})
SCS = 60 kHz	SCS = 120 kHz	
≥ 24	N/A	76
≥ 64	≥ 32	32
≥ 132	≥ 64	24
N/A	≥ 128	20
NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6].		
NOTE 2: If SRS and PRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.		

10.1.39.3 Measurement Accuracy Requirements for TRS

The error in the reported value of UE Rx-Tx time difference measurement, including both the measurement error and the reporting quantization error, shall be within the accuracy requirements specified in this clause.

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall not apply, if:

- N_{TA_offset} defined in Table 7.1.2-2 changes during the UE Rx-Tx measurement period or
- if the uplink transmission timing changes during the UE Rx-Tx measurement period due to the network-configured Timing Advance.

The UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that:

- The UE transmits SRS within [-160, 160] msec of at least one PDC TRS resource from the serving cell (PCell).

When a serving cell change occurs during the UE Rx-Tx measurement period, the UE Rx-Tx time difference measurement accuracy requirements in this clause shall apply provided that the serving cell change does not impact SRS configuration for the UE Rx-Tx measurement.

The accuracy requirements in Table 10.1.39.3-1 for FR1 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-1 [18] for reference sensitivity are fulfilled.

PRP_{dBm} according to Annex B.2.13 for a corresponding Band.

AWGN propagation condition.

Table 10.1.39.3-1: UE Rx-Tx time difference measurement accuracy in FR1 in AWGN

Accuracy	TRS Es/lot	Minimum TRS bandwidth	TRS SCS	Conditions NR operating band groups ^{Note 2}	Io ^{Note 3} range	
					Minimum Io ^{Note 1}	Maximum Io
Tc ^{Note 4}	dB	RB	kHz		dBm / SCS _{TRS}	dBm/BW
[116+δ+ε]	-3	≥[24]	15	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-50
				NR_FDD_FR1_B	-120.5	
				NR_TDD_FR1_C	-120	
				NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	
				NR_FDD_FR1_E, NR_TDD_FR1_E	-119	
				NR_FDD_FR1_F	-118.5	
				NR_FDD_FR1_G	-118	
				NR_FDD_FR1_H	-117.5	
[60+δ+ε]		≥[52]		Note 5	NOTE 5	NOTE 5
[29+δ+ε]		>[104]		Note 5	NOTE 5	NOTE 5
[56+δ+ε]		≥[24]	30	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-118	-50
				NR_FDD_FR1_B	-117.5	
				NR_TDD_FR1_C	-117	
				NR_FDD_FR1_D, NR_TDD_FR1_D	-116.5	
				NR_FDD_FR1_E, NR_TDD_FR1_E	-116	
				NR_FDD_FR1_F	-115.5	
				NR_FDD_FR1_G	-115	
				NR_FDD_FR1_H	-114.5	
[29+δ+ε]		≥[48]		NOTE 5	NOTE 5	NOTE 5
[15+δ+ε]		≥[132]		NOTE 5	NOTE 5	NOTE 5

[29+ δ + ϵ]	$\geq[24]$	60	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-115	-50
			NR_FDD_FR1_B	-114.5	
			NR_TDD_FR1_C	-114	
			NR_FDD_FR1_D, NR_TDD_FR1_D	-113.5	
			NR_FDD_FR1_E, NR_TDD_FR1_E	-113	
			NR_FDD_FR1_F	-113.5	
			NR_FDD_FR1_G	-113	
			NR_FDD_FR1_H	-111.5	
[14+ δ + ϵ]	$\geq[64]$		NOTE 5	NOTE 5	NOTE 5
[7+ δ + ϵ]	$\geq[132]$		NOTE 5	NOTE 5	NOTE 5
NOTE 1: This minimum I_o condition is expressed as the average I_o per RE over all REs in an OFDM symbol. NOTE 2: NR operating band groups are as defined in Section 3.5. NOTE 3: The I_o is defined in TRS slots. The same I_o range applies to TRS and non-TRS symbols. I_o levels are different in TRS and non-TRS symbols within the same slot. NOTE 4: T_c is the basic timing unit defined in TS 38.211 [6]. NOTE 5: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding requirement with the TRS bandwidth of the smallest RB number for the corresponding SCS. NOTE 6: δ is the margin determined from Table 10.1.39.3-3. NOTE 7: ϵ is the margin for reporting quantization error and $\epsilon=16 T_c$.					

The accuracy requirements in Table 10.1.39.3-2 for FR2 are valid under the following conditions:

Conditions defined in clause 7.3 of TS 38.101-2 [19] for reference sensitivity are fulfilled.

PRP_{dBm} according to Annex B.2.13 for a corresponding Band.

AWGN propagation condition.

Table 10.1.39.3-2: UE Rx-Tx time difference measurement accuracy in FR2 in AWGN

Accuracy	Conditions				
	TRS $\hat{E}_s/\text{lot}$	Minimum TRS bandwidth	TRS SCS	$I_o^{\text{Note 3}}$ range	
				Minimum $I_o^{\text{Note 1}}$	Maximum I_o
$T_c^{\text{Note 4}}$	dB	RB	kHz	dBm / SCS_{TRS}	dBm/BW _{Channel}
[29+ δ + ϵ]	-3	$\geq[24]$	60	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
[14+ δ + ϵ]		$\geq[64]$		NOTE 5	NOTE 5
[7+ δ + ϵ]		$\geq[132]$		NOTE 5	NOTE 5
[15+ δ + ϵ]		$\geq[32]$	120	Same value as PRP in Table B.2.14-2, according to UE Power class, operating band and angle of arrival	-50
[7+ δ + ϵ]		$\geq[64]$		NOTE 5	NOTE 5
[4+ δ + ϵ]		$\geq[128]$		NOTE 5	NOTE 5
NOTE 1: This minimum I_o condition is expressed as the average I_o per RE over all REs in an OFDM symbol. NOTE 2: NR operating band groups are as defined in Section 3.5. NOTE 3: The I_o is defined in TRS slots. The same I_o range applies to TRS and non-TRS symbols. I_o levels are different in TRS and non-TRS symbols within the same slot. NOTE 4: T_c is the basic timing unit defined in TS 38.211 [6]. NOTE 5: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding requirement with the TRS bandwidth of the smallest RB number for the corresponding SCS. NOTE 6: δ is the margin determined from Table 10.1.39.3-4. NOTE 7: ϵ is the margin for reporting quantization error and $\epsilon=16 T_c$.					

Table 10.1.39.3-3: Margin for UE Rx-Tx time difference measurement accuracy in FR1

Min(TRS BW, SRS BW) (RB)			Margin (Tc ^{Note 1})
SCS = 15 kHz	SCS = 30 kHz	SCS = 60 kHz	
≥ 24	N/A	N/A	160
≥ 52	≥ 24	N/A	80
≥ 104	≥ 48	≥ 24	56
N/A	≥ 132	≥ 64	24
N/A	N/A	≥ 132	24

NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 2: If SRS and TRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.

Table 10.1.39.3-4: Margin for UE Rx-Tx time difference measurement accuracy in FR2

Min(TRS BW, SRS BW) (MHz)		Margin (Tc ^{Note 1})
SCS = 60 kHz	SCS = 120 kHz	
≥ 24	N/A	76
≥ 64	≥ 32	32
≥ 132	≥ 64	24
N/A	≥ 128	20

NOTE 1: Tc is the basic timing unit defined in TS 38.211 [6].
NOTE 2: If SRS and TRS have different SCS, the margin corresponding to the smallest RS BW in MHz applies.

10.1.40 Void

10.1A NR measurements for RedCap

10.1A.1 Introduction

The requirements in this section are applicable for RedCap UE as follows:

- intra-frequency requirements apply for PCell measurements in SA,
- inter-frequency requirements apply for non-serving cell measurements on NR carrier frequencies.
- inter-frequency requirements apply for measurements from one cell on a frequency compared to the measurement from another cell on a different frequency.

The accuracy requirements in this clause are applicable for AWGN radio propagation conditions. The accuracy requirements of RSRP, RSRQ and SINR are applicable provided that reference SSB is not changed during measurement period.

10.1A.2 Intra-frequency RSRP accuracy requirements for FR1

10.1A.2.1 Intra-frequency SS-RSRP accuracy requirements

10.1A.2.1.1 Absolute SS-RSRP Accuracy

The accuracy requirements in clause 10.1.2.1.1 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.2.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [18] for reference sensitivity are fulfilled.

- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.15 for a corresponding Band for each relevant SSB.

Table 10.1A.2.1.1-1: SS-RSRP Intra frequency absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	I_o ^{Note 1} range				
			NR operating band groups ^{Note 2}	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
± 5.5	± 10	≥ -6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
± 9	± 12	≥ -6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	-70	-50

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1A.2.1.2 Relative SS-RSRP Accuracy

The accuracy requirements in clause 10.1.2.1.2 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.2.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.15 for a corresponding Band for each relevant SSB.

Table 10.1A.2.1.2-1: SS-RSRP Intra frequency relative accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$ ^{Note 2}	I_o ^{Note 1} range				
			NR operating band groups ^{Note 4}	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
			NR_FDD_FR1_A, NR_TDD_FR1_A,	-121	-118	N/A	-50

± 3	± 4	≥ 3	NR SDL FR1_A				
			NR FDD FR1_B	-120.5	-117.5	N/A	-50
			NR TDD FR1_C	-120	-117	N/A	-50
			NR FDD FR1_D, NR TDD FR1_D	-119.5	-116.5	N/A	-50
			NR FDD FR1_E, NR TDD FR1_E	-119	-116	N/A	-50
			NR FDD FR1_F	-118.5	-115.5	N/A	-50
			NR FDD FR1_G	-118	-115	N/A	-50
			NR FDD FR1_H	-117.5	-114.5	N/A	-50
± 4	± 4	≥ 6	Note 3	Note 3	Note 3	N/A	Note 3
NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB $\hat{E}_s/I_0$ is the minimum SSB $\hat{E}_s/I_0$ of the pair of cells to which the requirement applies. NOTE 3: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1A.3 Intra-frequency RSRP accuracy requirements for FR2

10.1A.3.1 Intra-frequency SS-RSRP accuracy requirements

10.1A.3.1.1 Absolute SS-RSRP Accuracy

The accuracy requirements in clause 10.1.3.1.1 shall apply.

10.1A.3.1.2 Relative SS-RSRP Accuracy

The accuracy requirements in clause 10.1.3.1.2 shall apply.

10.1A.4 Inter-frequency RSRP accuracy requirements for FR1

10.1A.4.1 Inter-frequency SS-RSRP accuracy requirements

10.1A.4.1.1 Absolute Accuracy of SS-RSRP in FR1

The accuracy requirements in clause 10.1.4.1.1 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.4.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.16 for a corresponding Band for each relevant SSB.

Table 10.1A.4.1.1-1: SS-RSRP Inter frequency Absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/Iot Note 2	I0 ^{Note 1} range				
			NR operating band groups ^{Note 3}	Minimum I0			Maximum I0
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
			NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70

±5.5	±10	≥-6	NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±9	±12	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	-70	-50
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.							
NOTE 2: Void							
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1A.4.1.2 Relative Accuracy of SS-RSRP in FR1

The accuracy requirements in clause 10.1.4.1.2 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.4.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [18] Clause 7.3 for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.16 for a corresponding Band for each relevant SSB.
- $|\text{SSB_RP1}_{\text{dBm}} - \text{SSB_RP2}_{\text{dBm}}| \leq 27 \text{ dB}$
- $|\text{Channel 1}_{I_o} - \text{Channel 2}_{I_o}| \leq 20 \text{ dB}$

Table 10.1A.4.1.2-1: SS-RSRP Inter frequency relative accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Es/Iot Note 2	Io ^{Note 1} range				
			NR operating band groups Note 3	Minimum Io		Maximum Io	
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±5.5	±7	≥-6	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.							

NOTE 2: The parameter SSB $\hat{E}_s/\text{lot}$ is the minimum SSB $\hat{E}_s/\text{lot}$ of the pair of cells to which the requirement applies.
 NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1A.5 Inter-frequency RSRP accuracy requirements for FR2

10.1A.5.1 Inter-frequency SS-RSRP accuracy requirements

10.1A.5.1.1 Absolute SS-RSRP Accuracy

The accuracy requirements in clause 10.1.5.1.1 shall apply.

10.1A.5.1.2 Relative SS-RSRP Accuracy

The accuracy requirements in clause 10.1.5.1.2 shall apply.

10.1A.6 Intra-frequency RSRQ accuracy requirements for FR1

10.1A.6.1 Intra-frequency SS-RSRQ accuracy requirements in FR1

10.1A.6.1.1 Absolute SS-RSRQ Accuracy in FR1

The accuracy requirements in clause 10.1.7.1.1 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.6.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.15 for a corresponding Band for each relevant SSB.

Table 10.1A.6.1.1-1: SS-RSRQ Intra frequency absolute accuracy for 1Rx RedCap UE in FR1

Accuracy			Conditions				
Normal condition	Extreme condition	SSB Ês/lot	Io ^{Note 1} range				
			NR operating band groups ^{Note 3}	Minimum Io		Maximum Io	
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±3.5	±5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±4.5	±5	≥-6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1A.7 Intra-frequency RSRQ accuracy requirements for FR2

10.1A.7.1 Intra-frequency SS-RSRQ accuracy requirements in FR2

10.1A.7.1.1 Absolute SS-RSRQ Accuracy in FR2

The accuracy requirements in clause 10.1.8.1.1 shall apply.

10.1A.8 Inter-frequency RSRQ accuracy requirements for FR1

10.1A.8.1 Inter-frequency SS-RSRQ accuracy requirements in FR1

10.1A.8.1.1 Absolute Accuracy of SS-RSRQ in FR1

The accuracy requirements in clause 10.1.9.1.1 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.8.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.16 for a corresponding Band for each relevant SSB.

Table 10.1A.8.1.1-1: SS-RSRQ Inter frequency absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$	I_o ^{Note 1} range				
			NR operating band groups ^{Note 3}	Minimum I_o		$\text{dBm}/\text{BW}_{\text{Channel}}$	Maximum I_o
				$\text{SCS}_{\text{SSB}} = 15 \text{ kHz}$	$\text{SCS}_{\text{SSB}} = 30 \text{ kHz}$		
dB	dB	dB		dBm / SCS_{SSB}			
± 3.5	± 5	≥ 3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
± 4.5	± 5	≥ 6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.							
NOTE 3: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1A.8.1.2 Relative Accuracy of SS-RSRQ in FR1

The accuracy requirements in clause 10.1.9.1.2 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.8.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.16 for a corresponding Band for each relevant SSB.

- $|\text{SSB_RP1}_{\text{dBm}} - \text{SSB_RP2}_{\text{dBm}}| \leq 27 \text{ dB}$
- $|\text{Channel 1_Io} - \text{Channel 2_Io}| \leq 20 \text{ dB}$

Table 10.1A.8.1.2-1: SS-RSRQ Inter frequency relative accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{\text{E}}_{\text{s}}/\text{lot}$ Note 2	Io ^{Note 1} range				
			NR operating band groups ^{Note 4}	Minimum Io		Maximum Io	
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±4	±5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±5	±5	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
NOTE 2: The parameter SSB $\hat{\text{E}}_{\text{s}}/\text{lot}$ is the minimum SSB $\hat{\text{E}}_{\text{s}}/\text{lot}$ of the pair of cells to which the requirement applies.
NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.

10.1A.9 Inter-frequency RSRQ accuracy requirements for FR2

10.1A.9.1 Inter-frequency SS-RSRQ accuracy requirements in FR2

10.1A.9.1.1 Absolute Accuracy of SS-RSRQ in FR2

The accuracy requirements in clause 10.1.10.1.1 shall apply.

10.1A.9.1.2 Relative Accuracy of SS-RSRQ in FR2

The accuracy requirements in clause 10.1.10.1.2 shall apply.

10.1A.10 Intra-frequency SINR accuracy requirements for FR1

10.1A.10.1 Intra-frequency SS-SINR accuracy requirements in FR1

10.1A.10.1.1 Absolute SS-SINR Accuracy in FR1

The accuracy requirements in clause 10.1.12.1.1 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.10.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for intra-frequency measurements are fulfilled according to Annex B.2.15 for a corresponding Band.

Table 10.1A.10.1.1-1: SS-SINR Intra frequency absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$ Note 3	I_o ^{Note 1} range				
			NR operating band groups Note 4	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}
				$SCS_{SSB} = 15 \text{ kHz}$	$SCS_{SSB} = 30 \text{ kHz}$		
± 4.0	± 4	≥ 3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
± 4.5	± 4	≥ 6	Note 2	Note 2	Note 2	Note 2	Note 2

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
NOTE 2: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.
NOTE 3: The requirements apply for SSB $\hat{E}_s/\text{lot} \leq 25$ dB under non-HST scenarios.
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 5: The requirements apply for SSB $\hat{E}_s/\text{lot} \leq 5$ dB with SCS 15kHz or 30kHz under NR high speed scenarios.

10.1A.11 Intra-frequency SINR accuracy requirements for FR2

10.1A.11.1 Intra-frequency SS-SINR accuracy requirements in FR2

10.1A.11.1.1 Absolute SS-SINR Accuracy in FR2

The accuracy requirements in clause 10.1.13.1.1 shall apply.

10.1A.12 Inter-frequency SINR accuracy requirements for FR1

10.1A.12.1 Inter-frequency SS-SINR accuracy requirements in FR1

10.1A.12.1.1 Absolute Accuracy of SS-SINR in FR1

The accuracy requirements in clause 10.1.14.1.1 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.12.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.16 for a corresponding Band.

Table 10.1A.12.1.1-1: SS-SINR Inter frequency absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/\text{lot}$ Note 3	I_o ^{Note 1} range				
			NR operating band groups Note 4	Minimum I_o		Maximum I_o	
dB	dB	dB		dBm / SCS_{SSB}		dBm/ BW_{Channel}	dBm/ BW_{Channel}

				SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
±4.0	±5	≥3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±4.5	±5	≥6	Note 2	Note 2	Note 2	Note 2	Note 2
NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth. NOTE 2: The same bands and the same I_0 conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 3: The requirements apply for SSB $\hat{E}_s/I_{ot} \leq 25$ dB. NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1A.12.1.2 Relative Accuracy of SS-SINR in FR1

The accuracy requirements in clause 10.1.14.1.2 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.12.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for inter-frequency measurements are fulfilled according to Annex B.2.16 for a corresponding Band.
- $|SSB_RP1_{dBm} - SSB_RP2_{dBm}| \leq 27$ dB
- $|Channel\ 1_I_0 - Channel\ 2_I_0| \leq 20$ dB

Table 10.1A.12.1.2-1: SS-SINR Inter frequency relative accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\hat{E}_s/I_{ot}$ Note 2,4	Io ^{Note 1} range				
			NR operating band groups Note 5	Minimum Io		Maximum Io	
dB	dB	dB		dBm / SCS _{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{SSB} = 120 kHz	SCS _{SSB} = 240 kHz		
±4.5	±5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
±5	±5	≥-6	Note 3	Note 3	Note 3	Note 3	Note 3
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: The parameter SSB $\hat{E}_s/I_{ot}$ is the minimum SSB $\hat{E}_s/I_{ot}$ of the pair of cells to which the requirement applies. NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement. NOTE 4: The requirements apply for SSB $\hat{E}_s/I_{ot} \leq [25]$ dB. NOTE 5: NR operating band groups in FR1 are as defined in clause 3.5.2							

10.1A.13 Inter-frequency SINR accuracy requirements for FR2

10.1A.13.1 Inter-frequency SS-SINR accuracy requirements in FR2

10.1A.13.1.1 Absolute Accuracy of SS-SINR in FR2

The accuracy requirements in clause 10.1.15.1.1 shall apply.

10.1A.13.1.2 Relative Accuracy of SS-SINR in FR2

The accuracy requirements in clause 10.1.15.1.1 shall apply.

10.1A.14 L1-RSRP accuracy requirements for FR1

10.1A.14.1 SSB based L1-RSRP accuracy requirements

10.1A.14.1.1 Absolute Accuracy

The accuracy requirements in clause 10.1.19.1.1 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.14.1.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.

Table 10.1A.14.1.1-1: SSB based L1-RSRP absolute accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB Ês/lot	Io ^{Note 1} range				
			NR operating band groups ^{Note 2}	Minimum Io		dBm/BW _{Channel}	Maximum Io
				dBm / SCS _{SSB}	dBm / SCS _{SSB}		
dB	dB	dB		= 15 kHz	= 30 kHz		
±8.0	±12.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-70
±11.5	±14.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E,	N/A	N/A	-70	-50

			NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H,				
NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.							
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1A.14.1.2 Relative Accuracy

The accuracy requirements in clause 10.1.19.1.2 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.14.1.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.1 for a corresponding Band for each relevant SSB.

Table 10.1A.14.1.2-1: SSB based L1-RSRP relative accuracy for 1Rx RedCap UE in FR1

Accuracy		Conditions					
Normal condition	Extreme condition	SSB $\bar{E}_s/\text{lot}$ Note 2	I_0 ^{Note 1} range				
			NR operating band groups Note 4	Minimum I_0			Maximum I_0
dB	dB	dB		dBm / SCS_{SSB}		dBm/BW _{Channel}	dBm/BW _{Channel}
				$\text{SCS}_{\text{SSB}} = 15 \text{ kHz}$	$\text{SCS}_{\text{SSB}} = 30 \text{ kHz}$		
± 6	± 7	≥ -3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	N/A	-50
NOTE 1: I_0 is assumed to have constant EPRE across the bandwidth.							
NOTE 2: The parameter SSB $\bar{E}_s/\text{lot}$ is the minimum SSB $\bar{E}_s/\text{lot}$ of the pair of SSBs to which the requirement applies.							
NOTE 3: Void							
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.							

10.1A.14.2 CSI-RS based L1-RSRP accuracy requirements

10.1A.14.2.1 Absolute Accuracy

The accuracy requirements in clause 10.1.19.2.2 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.14.2.1-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1A.19.2.1-1.

Table 10.1A.14.2.1-1: CSI-RS based L1-RSRP absolute accuracy for 1Rx RedCap UE in FR1

Accuracy			Conditions					
Normal condition	Extreme condition	CSI-RS Es/lot	Io ^{Note 1} range					
			NR operating band groups ^{Note 2}	Minimum Io			Maximum Io	
dB	dB	dB		dBm / SCS _{CSI-RS}			dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz		
±8.0	±12.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-70
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_C	-120	-117	-114	N/A	-70
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-70
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-70
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-70
			NR_FDD_FR1_G	-118	-115	-112	N/A	-70
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-70
±11.5	±14.5	≥-3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A, NR_FDD_FR1_B, NR_TDD_FR1_C, NR_FDD_FR1_D, NR_TDD_FR1_D, NR_FDD_FR1_E, NR_TDD_FR1_E, NR_FDD_FR1_F, NR_FDD_FR1_G, NR_FDD_FR1_H	N/A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth.								
NOTE 2: NR operating band groups in FR1 are as defined in clause 3.5.2.								

10.1A.14.2.2 Relative Accuracy

The accuracy requirements in clause 10.1.19.2.2 shall apply when RedCap UE is capable of 2Rx. When UE is only required to support 1RX, the absolute accuracy requirements in Table 10.1A.14.2.2-1 are valid under the following conditions:

- Conditions defined in clause 7.3I of TS 38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for L1-RSRP measurements are fulfilled according to Annex B.2.4.2 for a corresponding Band for each relevant CSI-RS.
- The bandwidth of CSI-RS is 48 PRBs and the density is 3.

The performance with larger bandwidth of CSI-RS is equal to or better than the accuracy requirements in Table 10.1A.14.2.2-1.

Table 10.1A.14.2.2-1: CSI-RS based L1-RSRP relative accuracy for 1Rx RedCap UE in FR1

Accuracy	Conditions
----------	------------

Normal condition	Extreme condition	CSI-RS $\hat{E}_s/\text{lot}$ Note 2	I_o ^{Note 1} range					
			NR operating band groups Note 4	Minimum I_o			Maximum I_o	
dB	dB	dB		dBm / $SCS_{\text{CSI-RS}}$			dBm/BW _{Channel}	dBm/BW _{Channel}
				$SCS_{\text{CSI-RS}} = 15$ kHz	$SCS_{\text{CSI-RS}} = 30$ kHz	$SCS_{\text{CSI-RS}} = 60$ kHz		
± 6	± 7	≥ -3	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	N/A	-50
			NR_FDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_C	-120	-117	-114	N/A	-50
			NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5	N/A	-50
			NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113	N/A	-50
			NR_FDD_FR1_F	-118.5	-115.5	-112.5	N/A	-50
			NR_FDD_FR1_G	-118	-115	-112	N/A	-50
			NR_FDD_FR1_H	-117.5	-114.5	-111.5	N/A	-50
NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.								
NOTE 2: The parameter CSI-RS $\hat{E}_s/\text{lot}$ is the minimum CSI-RS $\hat{E}_s/\text{lot}$ of the pair of CSI-RS resources to which the requirement applies.								
NOTE 3: Void								
NOTE 4: NR operating band groups in FR1 are as defined in clause 3.5.2.								

10.1A.15 L1-RSRP accuracy requirements for FR2

10.1A.15.1 SSB based L1-RSRP accuracy requirements

10.1A.15.1.1 Absolute Accuracy

The accuracy requirements in clause 10.1.20.1.1 shall apply.

10.1A.15.1.2 Relative Accuracy

The accuracy requirements in clause 10.1.20.1.1 shall apply.

10.1A.15.2 CSI-RS based L1-RSRP accuracy requirements

10.1A.15.2.1 Absolute Accuracy

The accuracy requirements in clause 10.1.20.1.1 shall apply.

10.1A.15.2.2 Relative Accuracy

The accuracy requirements in clause 10.1.20.1.1 shall apply.

10.2 E-UTRAN measurements

10.2.1 Introduction

Accuracy requirements for measurements on E-UTRAN carrier frequencies are specified in clause 10.2 and apply for UE in SA or NR-DC or NE-DC operation mode, unless otherwise specified.

Unless otherwise specified, the requirements in clause 10.2 are applicable for a UE:

- in RRC_CONNECTED state
- performing measurements with appropriate measurement gaps according to clause 9.1.2.
- that is synchronised to the cell that is measured.

The reported measurement result after layer 1 filtering shall be an estimate of the average value of the measured quantity over the measurement period. The reference point for the measurement result after layer 1 filtering is referred to as point B in the measurement model described in TS 36.300 [24].

The accuracy requirements of E-UTRA measurements in this clause are valid for the reported measurement result after layer 1 filtering. The accuracy requirements are verified from the measurement report at point D in the measurement model having the layer 3 filtering disabled.

If the UE needs measurement gaps to perform the inter-RAT NR — E-UTRAN FDD and NR — E-UTRAN TDD measurements, the relevant measurement procedure and measurement gap patterns stated in clause 9.1.2 shall apply.

10.2.2 E-UTRAN RSRP measurements

NOTE: This measurement is for handover between NR and E-UTRAN.

The measurement period of E-UTRA RSRP in RRC_CONNECTED state is specified in clause 9.4.2 and 9.4.3.

The accuracy requirements of E-UTRA RSRP measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RSRP Accuracy Requirements in clause 9.1.3 of TS 36.133 [15].

The reporting range and mapping specified for RSRP measurements in clause 9.1.4 of TS 36.133 [15] shall apply.

10.2.3 E-UTRAN RSRQ measurements

NOTE: This measurement is for handover between NR and E-UTRAN.

The measurement period of E-UTRA RSRQ in RRC_CONNECTED state is specified in clause 9.4.2 and 9.4.3.

The accuracy requirements of E-UTRA RSRQ measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RSRQ Accuracy Requirements in clause 9.1.6 of TS 36.133 [15].

The requirements for accuracy of E-UTRA RSRQ measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RSRQ Accuracy Requirements in clause 9.1.6 of TS 36.133 [15].

The reporting range and mapping specified for RSRQ measurements in clause 9.1.7 of TS 36.133 [15] shall apply.

10.2.4 E-UTRAN RSTD measurements

The requirements in this clause are valid for UE supporting this capability.

The measurement period is specified in clauses 9.4.4.1 and 9.4.4.2 for inter-RAT NR — E-UTRAN FDD and inter-RAT NR — E-UTRAN TDD RSTD measurements, respectively.

The accuracy requirements and the corresponding side conditions shall be the same as the inter-frequency measurement accuracy requirements for RSTD measurements in RRC_CONNECTED in clause 9.1.10.2 of TS 36.133 [15].

If the UE needs measurement gaps to perform the inter-RAT NR — E-UTRAN FDD and NR — E-UTRAN TDD RSTD measurements, the relevant measurement procedure and measurement gap patterns stated in clause 9.1.2 shall apply.

The reporting range and mapping for the inter-RAT NR — E-UTRAN FDD and NR — E-UTRAN TDD RSTD measurements is the same as specified for RSTD measurements in TS 36.133 [15, clauses 9.1.10.3 and 9.1.10.4].

10.2.5 E-UTRAN RS-SINR measurements

NOTE: This measurement is for handover between NR and E-UTRAN.

The measurement period of E-UTRA RS-SINR in RRC_CONNECTED state is specified in clause 9.4.2 and 9.4.3.

The accuracy requirements of E-UTRA RS-SINR measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RS-SINR Accuracy Requirements in clause 9.1.17.3 of TS 36.133 [15].

The reporting range and mapping for E-UTRA RS-SINR measurements shall be the same as specified for RS-SINR measurements in clause 9.1.17.1 of TS 36.133 [15].

10.2.6 E-UTRAN RSRP measurements for CA/DC Idle Mode Measurements

NOTE: This measurement is for CA/DC Idle Mode measurements between NR and E-UTRAN.

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC_INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of E-UTRA RSRP.

The measurement period of E-UTRA RSRP in RRC_IDLE and RRC_INACTIVE states are specified in clause 4.4.2.

The accuracy requirements of E-UTRA RSRP measurements in RRC_IDLE and RRC_INACTIVE states and the corresponding side conditions shall be as the inter-frequency RSRP Accuracy Requirements in clause 9.1.3B.2 of TS 36.133 [15].

The reporting range and mapping specified for RSRP measurements in clause 9.1.4 of TS 36.133 [15] shall apply.

10.2.7 E-UTRAN RSRQ measurements for CA/DC Idle Mode Measurements

NOTE: This measurement is for CA/DC Idle Mode measurements between NR and E-UTRAN.

The requirements in this clause are applicable for a UE:

- in state RRC_IDLE or RRC_INACTIVE
- that is synchronised to the cell that is measured.

The requirements are for absolute accuracy of E-UTRA RSRQ.

The measurement period of E-UTRA RSRQ in RRC_IDLE and RRC_INACTIVE states are specified in clause 4.4.2.

The accuracy requirements of E-UTRA RSRQ measurements in RRC_IDLE and RRC_INACTIVE states and the corresponding side conditions shall be as the inter-frequency RSRQ Accuracy Requirements in clause 9.1.6B.2 of TS 36.133 [15].

The reporting range and mapping specified for RSRQ measurements in clause 9.1.7 of TS 36.133 [15] shall apply.

10.2A E-UTRAN measurements for RedCap

10.2A.1 Introduction

Accuracy requirements for measurements on E-UTRAN carrier frequencies are specified in clause 10.2A and apply for RedCap UE in SA operation mode, unless otherwise specified.

Unless otherwise specified, the requirements in clause 10.2A are applicable for a UE:

- in RRC_CONNECTED state
- performing measurements with appropriate measurement gaps according to clause 9.1A.2.
- that is synchronised to the cell that is measured.

The reported measurement result after layer 1 filtering shall be an estimate of the average value of the measured quantity over the measurement period. The reference point for the measurement result after layer 1 filtering is referred to as point B in the measurement model described in TS 36.300 [24].

The accuracy requirements of E-UTRA measurements in this clause are valid for the reported measurement result after layer 1 filtering. The accuracy requirements are verified from the measurement report at point D in the measurement model having the layer 3 filtering disabled.

If the UE needs measurement gaps to perform the inter-RAT NR — E-UTRAN FDD and NR — E-UTRAN TDD measurements, the relevant measurement procedure and measurement gap patterns stated in clause 9.1A.2 shall apply.

10.2A.2 E-UTRAN RSRP measurements

NOTE: This measurement is for handover between NR and E-UTRAN.

The measurement period of E-UTRA RSRP in RRC_CONNECTED state is specified in clause 9.4A.2 and 9.4A.3.

For 2Rx RedCap,

- The accuracy requirements of E-UTRA RSRP measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RSRP accuracy requirements for UE other than Cat.1bis in clause 9.1.3 of TS 36.133 [15].

For 1Rx RedCap,

- The accuracy requirements of E-UTRA RSRP measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RSRP accuracy requirements for UE Cat.1bis in clause 9.1.3 of TS 36.133 [15].

The reporting range and mapping specified for RSRP measurements in clause 9.1.4 of TS 36.133 [15] shall apply.

10.2A.3 E-UTRAN RSRQ measurements

NOTE: This measurement is for handover between NR and E-UTRAN.

The measurement period of E-UTRA RSRQ in RRC_CONNECTED state is specified in clause 9.4A.2 and 9.4A.3.

For 2Rx RedCap,

- The accuracy requirements of E-UTRA RSRQ measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RSRQ accuracy requirements for UE other than Cat.1bis in clause 9.1.6 of TS 36.133 [15].

For 1Rx RedCap,

- The accuracy requirements of E-UTRA RSRQ measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RSRQ accuracy requirements for UE Cat.1bis in clause 9.1.6 of TS 36.133 [15].

The requirements for accuracy of E-UTRA RSRQ measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RSRQ Accuracy Requirements in clause 9.1.6 of TS 36.133 [15].

The reporting range and mapping specified for RSRQ measurements in clause 9.1.7 of TS 36.133 [15] shall apply.

10.2A.4 E-UTRAN RS-SINR measurements

NOTE: This measurement is for handover between NR and E-UTRAN.

The measurement period of E-UTRA RS-SINR in RRC_CONNECTED state is specified in clause 9.4A.2 and 9.4A.3.

For 2Rx RedCap,

- The accuracy requirements of E-UTRA RS-SINR measurements in RRC_CONNECTED state and the corresponding side conditions shall be the same as the inter-frequency RS-SINR accuracy requirements in clause 9.1.17.3 of TS 36.133 [15].

The reporting range and mapping for E-UTRA RS-SINR measurements shall be the same as specified for RS-SINR measurements in clause 9.1.17.1 of TS 36.133 [15].

10.3 UTRAN FDD Measurements

The requirements in this clause are applicable for a UE:

- in state RRC_CONNECTED
- performing measurements according to clause 9.4.6 with appropriate measurement gaps
- that is synchronised to the cell that is measured.

The reported measurement result after layer 1 filtering shall be an estimate of the average value of the measured quantity over the measurement period. The reference point for the measurement result after layer 1 filtering is referred to as point B in the measurement model described in TS 25.302 [30].

The accuracy requirements in this clause are valid for the reported measurement result after layer 1 filtering. The accuracy requirements are verified from the measurement report at point D in the measurement model having the layer 3 filtering disabled.

10.3.1 UTRAN FDD CPICH RSCP

NOTE: This measurement is for handover between E-UTRAN and UTRAN FDD.

The requirements in this clause are valid for terminals supporting this capability.

The measurement period for RRC_CONNECTED state is specified in clause 9.4.6.

In RRC_CONNECTED state the accuracy requirements shall meet the absolute accuracy requirements in table 10.3.1-1, under the following conditions:

- CPICH Ec/Io condition for a detectable cell is as specified in clause 9.4.6;
- SCH_Ec/Io condition for a detectable cell is as specified in clause 9.4.6.

Table 10.3.1-1: UTRAN FDD CPICH_RSCP absolute accuracy

Accuracy		Conditions		
Normal condition	Extreme condition	Io range		
dB	dB	UTRA operating bands	Minimum Io dBm/3.84 MHz	Maximum Io dBm/3.84 MHz
±6	±9	Band I, IV, VI, X XI, XIX and XXI	-94	-70
		Band IX	-93	-70
		Band II, V and VII	-92	-70

		Band III, VIII, XII, XIII, XIV, XX and XXII	-91	-70
		Band XXV, XXVI ^{Note 1}	-90.5	-70
±8	±11	Note 2	-70	-50
NOTE 1: For Band XXVI, the condition has the minimum Io of -92 dBm/3.84 MHz when the carrier frequency of the assigned UTRA channel is within 869-894 MHz for the UE which supports both Band V and Band XXVI operating frequencies. NOTE 2: The same bands apply for this requirement as for the corresponding highest accuracy requirement.				

If the UE, in RRC_CONNECTED state, needs measurement gaps to perform UTRAN FDD measurements, the relevant UTRAN FDD measurement procedure and measurement gap pattern stated in clause 9.4.6 shall apply.

The reporting range and mapping specified for FDD CPICH RSCP in TS 25.133 [29] shall apply.

10.3.2 UTRAN FDD CPICH Ec/No

NOTE: This measurement is for handover between E-UTRAN and UTRAN FDD.

The requirements in this clause are valid for terminals supporting this capability.

The measurement period for RRC_CONNECTED state is specified in clause 9.4.6.

In RRC_CONNECTED state the accuracy requirements shall be the same as the inter-frequency measurement accuracy requirements for FDD CPICH Ec/No in TS 25.133 [29].

If the UE, in RRC_CONNECTED state, needs measurement gaps to perform UTRAN FDD measurements, the UTRAN FDD measurement procedure and measurement gap pattern stated in clause 9.4.6 shall apply.

The reporting range and mapping specified for FDD CPICH Ec/No in TS 25.133 [29] shall apply.

10.4 V2X measurements

10.4.1 Introduction

The requirements in this section are applicable for a UE capable of V2X sidelink communication.

The accuracy requirements in this clause are:

- applicable for AWGN radio propagation conditions,
- assume independent interference (noise) at each receiver antenna port.

10.4.2 Intra-frequency PSBCH-RSRP accuracy requirements for FR1

10.4.2.1 PSBCH-RSRP Absolute Accuracy

The requirements for absolute accuracy of PSBCH-RSRP in this clause apply to a V2X synchronization source on the same frequency as that of the own V2X UE performing the measurement in FR1.

The accuracy requirements in Table 10.4.2.1-1 are valid under the following conditions:

- Demodulation reference signals are transmitted from one port.
- Conditions defined in Clause 7.3E of TS38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for PSBCH-RSRP measurements are fulfilled according to Annex B.4.2 for a corresponding Band for each relevant PSBCH-DMRS.

Table 10.4.2.1-1: Intra-frequency PSBCH-RSRP absolute accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	$\hat{E}_s/\text{lot}$ Note 3	I_o Note 1 range					
			NR V2X operating band groups Note 2	Minimum I_o			Maximum I_o	
dB	dB	dB		dBm / SCS_{SL}			dBm/ BW_{Channel}	dBm/ BW_{Channel}
				SCS_{SL} = 15 kHz	SCS_{SL} = 30 kHz	SCS_{SL} = 60 kHz		
± 4.5	± 9	≥ -6	NR_TDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_J	-116.5	-113.5	-110.5	N/A	-70
± 8	± 11	≥ -6	NR_TDD_FR1_B, NR_TDD_FR1_J	N/A	N/A	N/A	-70	-50

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR V2X operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 3: $\hat{E}_s/\text{lot}$ for a SyncRef UE is the $\hat{E}_s/\text{lot}$ of PSBCH-DMRS.

10.4.2.2 PSBCH-RSRP Relative Accuracy

The relative accuracy of PSBCH-RSRP is defined as the PSBCH-RSRP measured from one V2X synchronization source compared to the PSBCH-RSRP measured from another V2X synchronization source on the same frequency in FR1.

The accuracy requirements in Table 10.4.2.2-1 are valid under the following conditions:

- Demodulation reference signals are transmitted from one port.
- Conditions defined in Clause 7.3E of TS38.101-1 [18] for reference sensitivity are fulfilled.
- Conditions for PSBCH-RSRP accuracy measurements are fulfilled according to Annex B.4.2 for a corresponding Band for each relevant PSBCH-DMRS.

Table 10.4.2.2-1: Intra-frequency PSBCH-RSRP relative accuracy in FR1

Accuracy		Conditions						
Normal condition	Extreme condition	$\hat{E}_s/\text{lot}$ Note 3	I_o Note 1 range					
			NR V2X operating band groups Note 2	Minimum I_o			Maximum I_o	
dB	dB	dB		dBm / SCS_{SL}			dBm/ BW_{Channel}	dBm/ BW_{Channel}
				SCS_{SL} = 15 kHz	SCS_{SL} = 30 kHz	SCS_{SL} = 60 kHz		
± 2	± 3	≥ -3	NR_TDD_FR1_B	-120.5	-117.5	-114.5	N/A	-50
			NR_TDD_FR1_J	-116.5	-113.5	-110.5	N/A	-50
± 3	± 3	≥ -6	Note 4	Note 4	Note 4	Note 4	N/A	Note 4

NOTE 1: I_o is assumed to have constant EPRE across the bandwidth.
NOTE 2: NR V2X operating band groups in FR1 are as defined in clause 3.5.2.
NOTE 3: $\hat{E}_s/\text{lot}$ for a SyncRef UE is the $\hat{E}_s/\text{lot}$ of PSBCH-DMRS.
NOTE 4: The same bands and the same I_o conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.

10.4.3 Intra-Frequency SL-RSSI Measurement Accuracy Requirements for FR1

10.4.3.1 Absolute SL-RSSI Accuracy

The intra-frequency SL-RSSI requirements are specified in Table 10.4.3.1-1. The requirements apply for measurement period of 1slot and for any configured measurement bandwidth larger than 10 RBs, provided that:

- All symbols during each RSSI measurement duration are available for RSSI sampling within the same measurement interval.

Table 10.4.3.1-1: Intra-frequency SL-RSSI absolute accuracy

Accuracy		Conditions				
Normal condition	Extreme condition	Io ^{Note 1} range				
		NR V2X operating band groups ^{Note 2}	Minimum Io			Maximum Io
dB	dB		dBm/SCS _{SL}			dBm/BW _{Channel}
			SCS _{SL} = 15kHz	SCS _{SL} = 30kHz	SCS _{SL} = 60kHz	
±2.5	±5.5	NR_TDD_FR1_B	-120.5	-117.5	-114.5	-50
		NR_TDD_FR1_J	-116.5	-113.5	-110.5	-50
±4.5	±7.5	Note 3	Note 3	Note 3	Note 3	Note 3

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
 NOTE 2: NR V2X operating band groups are as defined in Section 3.5 for the corresponding NR operating bands.
 NOTE 3: The same bands and the same Io conditions for each band apply for this requirement as for the corresponding highest accuracy requirement.

10.4.4 Intra-Frequency L1 SL-RSRP Measurement Accuracy Requirements for FR1

10.4.4.1 Absolute L1 SL-RSRP Accuracy

The requirements for absolute accuracy of L1 SL-RSRP in this clause apply to a UE performing PSCCH-RSRP and/or PSSCH-RSRP measurements on the same frequency as used by operating V2X sidelink communication.

The accuracy requirements in Table 10.4.4.1-1 are valid under the following conditions:

- Demodulation reference signals for PSCCH and/or PSSCH are transmitted from one port.
- Conditions defined in clause 7.3E of TS38.101-1 [18] for reference sensitivity are fulfilled.
- PSCCH-RSRP[dBm] and/or PSSCH-RSRP[dBm] according to Annex B.4.4 for a corresponding Band are fulfilled.

Table 10.4.4.1-1: Intra-frequency L1 SL-RSRP absolute accuracy for UE capable of V2X sidelink communication

Accuracy		Conditions						
Normal condition	Extreme condition	Ês/lot ^{Note 3}	Io ^{Note 1} range					
			NR V2X operating band groups ^{Note 2}	Minimum Io			Maximum Io	
dB	dB	dB		dBm/SCS			dBm/BW _{Channel}	dBm/BW _{Channel}
				SCS = 15kHz	SCS = 30kHz	SCS = 60kHz		
± 4.5	± 9	≥0 dB	NR_TDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_J	-116.5	-113.5	-110.5	N/A	-70
± 8	± 11	≥0 dB	NR_TDD_FR1_B NR_TDD_FR1_J	N/A	N/A	N/A	-70	-50

NOTE 1: Io is assumed to have constant EPRE across the bandwidth.
 NOTE 2: NR V2X operating band groups are as defined in Section 3.5 for the corresponding NR operating bands.
 NOTE 3: The parameter Ês/lot is the Ês/lot of PSCCH-DMRS and/or PSSCH-DMRS.

10.4.5 Intra-Frequency Discovery Signal Measurement Accuracy Requirements

The requirements in this clause are applicable for a remote sidelink UE:

- is out of coverage on the frequency used for sidelink, and
- that is synchronised to the sidelink relay UE that is measured.

10.4.5.1 Absolute Discovery Signal Measurement Accuracy

The requirements for absolute accuracy of discovery signal measurement in this clause apply to a sidelink UE performing SD-RSRP measurements for direct to indirect path switch or SL-RSRP measurements for indirect to direct path switch on the same frequency as used by the sidelink relay UE transmitting the relay Discovery message.

The accuracy requirements in Table 10.4.5.1-1 are valid under the following conditions:

- Demodulation reference signals for PSCCH and/or PSSCH are transmitted from one port.
- Conditions defined in clause 7.3E of TS38.101-1 [18] for reference sensitivity are fulfilled.
- PSCCH-RSRP[dBm and/or PSSCH-RSRP[dBm according to Annex B.4.4 for a corresponding Band are fulfilled.

Table 10.4.5.1-1: Intra-frequency discovery signal measurement absolute accuracy for a remote sidelink UE [2] capable of sidelink Communication and sidelink Discovery and configured by upper layers for relay operation.

Accuracy		Conditions						
Normal condition	Extreme condition	Ês/lot Note 3	NR V2X operating band groups Note 2	Io ^{Note 1} range				
				Minimum Io			Maximum Io	
				dBm/SCS			dBm/BW _{Channel}	dBm/BW _{Channel}
dB	dB	dB		SCS = 15kHz	SCS = 30kHz	SCS = 60kHz		
± 4.5	± 9	≥0 dB	NR_TDD_FR1_B	-120.5	-117.5	-114.5	N/A	-70
			NR_TDD_FR1_J	-116.5	-113.5	-110.5	N/A	-70
± 8	± 11	≥0 dB	NR_TDD_FR1_B NR_TDD_FR1_J	N/A	N/A	N/A	-70	-50
NOTE 1: Io is assumed to have constant EPRE across the bandwidth. NOTE 2: NR sidelink operating band groups are as defined in Section 3.5 for the corresponding NR operating bands. NOTE 3: The parameter Ês/lot is the Ês/lot of PSCCH-DMRS and/or PSSCH-DMRS.								

12 V2X Requirements

12.1 Introduction

This clause contains the requirements for the UE capable of V2X sidelink communication when the UE is out of coverage on the carrier used for V2X sidelink operation, as defined in TS 38.304 [1]. The requirements apply when the UE is:

- in any cell selection state, or,
- configured for V2X SL operation on a V2X carrier which is dedicated to only V2X SL operation and configured with only a PCell on WAN carrier.
- configured for inter-band con-current V2X operation.
- configured for intra-band con-current V2X operation with different carriers.

Note: Any cell selection state refers to a UE that is out of network coverage and is not associated with a serving cell on any carrier as defined in TS 38.304 [1].

Note: When a UE in RRC_CONNECTED state is performing transmissions and/or reception for V2X sidelink communication, the UE shall meet all the requirements specified in Clause 9 assuming that UE has a dedicated RX/TX chain for V2X sidelink communication. Otherwise, the UE may interrupt the V2X sidelink communication in order to meet the measurement requirements specified in Clause 9.

This clause also contains the requirements for the UE capable of V2X sidelink communication when the UE is in coverage on the carrier used for V2X sidelink operation, as defined in TS 38.304 [1]. The requirements apply when the UE is:

- configured for intra-band con-current NR V2X cooperation with same carrier.

For UE capable of Public Safety sidelink communication and/or other commercial sidelink communication, unless explicitly stated, V2X requirements apply.

12.2 UE Transmit Timing

12.2.1 Introduction

This clause contains requirements of transmission timing for V2X sidelink communication when:

- GNSS is used as the synchronization reference source;
- NR Cell is used as the synchronization reference source;
- E-UTRAN Cell is used as the synchronization reference source;
- SyncRef UE is used as the synchronization reference source.

12.2.2 GNSS as synchronization reference source

The requirements in this subclause are applicable when the reference timing used by the UE for V2X sidelink communication is derived from GNSS.

The sidelink transmissions takes place $(N_{TA,SL} + N_{TA\ offset}) \times T_c$ before the subframe starting boundary as defined in TS 38.331 [2], where $N_{TA\ offset} = 0$ and $N_{TA,SL} = 0$.

The transmission timing error for sidelink transmissions shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is defined in Table 12.2.2-1.

Table 12.2.2-1: T_e Timing Error Limit

Frequency Range of sidelink	T_e
FR1	$12 \cdot 64 \cdot T_c$
Note 1: T_c is the basic timing unit defined in TS 38.211 [6].	

12.2.3 NR Cell as synchronization reference source

The requirements in this subclause are applicable when the reference timing used for sidelink transmissions is a NR serving cell on a non-V2X sidelink carrier or a V2X sidelink carrier.

The sidelink transmissions takes place $(N_{TA,SL} + N_{TA offset}) \times T_c$ before the reception of the first detected path (in time) of the corresponding downlink frame from the reference cell, where $N_{TA,SL} = 0$. If uplink transmission and sidelink transmission are in the same band, $N_{TA offset}$ is defined in Table 7.1.2-2, otherwise $N_{TA offset}$ is 0.

The transmission timing error for sidelink transmissions shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is defined in Table 12.2.3-1.

Table 12.2.3-1: T_e Timing Error Limit

Frequency Range of sidelink	SCS of SSB signals (kHz)	SCS of sidelink signals (kHz)	T _e
FR1	15	15	14*64*T _c
		30	12*64*T _c
		60	12*64*T _c
	30	15	10*64*T _c
		30	10*64*T _c
		60	9*64*T _c
Note 1: T _c is the basic timing unit defined in TS 38.211 [6].			

12.2.4 E-UTRAN Cell as synchronization reference source

The requirements in this subclause are applicable when the reference timing used for sidelink transmissions is an E-UTRAN serving cell on a non-V2X sidelink carrier.

The sidelink transmissions takes place $(N_{TA,SL} + N_{TA offset}) \times T_c$ before the reception of the first detected path (in time) of the corresponding E-UTRAN downlink frame from the reference cell, where $N_{TA offset} = 0$ and $N_{TA,SL} = 0$.

The transmission timing error for sidelink transmissions shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is defined in Table 12.2.4-1.

Table 12.2.4-1: T_e Timing Error Limit

Frequency Range of sidelink	E-UTRAN downlink bandwidth (MHz)	T_e
FR1	≥ 3	$14 \cdot 64 \cdot T_c$
Note 1: T_c is the basic timing unit defined in TS 38.211 [6].		

12.2.5 SyncRef UE as synchronization reference source

The requirements in this subclause are applicable when the reference timing used for deriving sidelink transmission is from SyncRef UE transmitting sidelink synchronization signals.

The sidelink transmissions takes place $(N_{TA,SL} + N_{TA\ offset}) \times T_c$ before the reception of the first detected path (in time) of the corresponding timing reference frame from the SyncRef UE, where $N_{TA\ offset} = 0$ and $N_{TA,SL} = 0$.

The transmission timing error for sidelink transmissions shall be less than or equal to $\pm T_e$ where the timing error limit value T_e is defined in Table 12.2.5-1.

Table 12.2.5-1: T_e Timing Error Limit

Frequency Range of sidelink	SCS of sidelink signals (kHz)	T_e
FR1	15	$12 \cdot 64 \cdot T_c$
	30	$8 \cdot 64 \cdot T_c$
	60	$5 \cdot 64 \cdot T_c$
Note 1: T_c is the basic timing unit defined in TS 38.211 [6].		

12.3 Initiation/Cease of SLSS Transmissions

12.3.1 Introduction

The requirements in this subclause are applicable to the UE capable of V2X sidelink communication when:

- GNSS is used as the synchronization reference source;
- NR Cell is used as the synchronization reference source;
- EUTRAN Cell is used as the synchronization reference source;
- SyncRef UE is used as the synchronization reference source.

12.3.1.1 Initiation/Cease of SLSS transmissions with NR cell as synchronization reference source

The requirements apply when the NR Cell is used as synchronization reference source and when the UE is

- out of coverage on the V2X NR sidelink carrier and in-coverage with a serving cell on a NR non-V2X sidelink carrier, or
- in coverage with a serving cell on a NR V2X sidelink carrier,

and when the conditions for SLSS transmissions specified in TS 38.331[2] are met; *networkControlledSyncTx* is not configured; and *syncTxThreshIC* is included in *SystemInformationBlockType12*. The UE shall be capable of measuring the RSRP of the cell used as synchronization reference source to evaluate to initiate/cease SLSS transmissions within $T_{\text{evaluate,SLSS}}$

where,

- $T_{\text{evaluate,SLSS}}$ is as specified in Table 12.3.1.1-1 when UE performs SSB based measurements without measurement gaps.
- $T_{\text{evaluate,SLSS}}$ is as specified in Table 12.3.1.1-2 when UE performs SSB based measurements with measurement gaps.

Table 12.3.1.1-1: $T_{\text{evaluate,SLSS}}$ for measurements without measurement gaps when NR cell is used as synchronization reference source (FR1)

DRX cycle in NR cell	$T_{\text{evaluate,SLSS}}$
No DRX	$\max(400\text{ms}, \text{ceil}(2 \times 5 \times K_p) \times \text{SMTC period})^{\text{Note 1}}$
DRX cycle $\leq 320\text{ms}$	$\max(400\text{ms}, \text{ceil}(1.5 \times 2 \times 5 \times K_p) \times \max(\text{SMTC period}, \text{DRX cycle}))$
DRX cycle $> 320\text{ms}$	$\text{ceil}(7 \times K_p) \times \text{DRX cycle}$
NOTE 1: If different SMTC periodicities are configured for different cells, the SMTC period in the requirement is the one used by the cell being identified	

Table 12.3.1.1-2: $T_{\text{evaluate,SLSS}}$ for measurements with measurement gaps when NR cell is used as synchronization reference source (FR1)

DRX cycle in NR cell	$T_{\text{evaluate,SLSS}}$
No DRX	$\max(400\text{ms}, 2 \times 5 \times \max(\text{MGRP}, \text{SMTC period})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $\leq 320\text{ms}$	$\max(400\text{ms}, \text{ceil}(2 \times 1.5 \times 5) \times \max(\text{MGRP}, \text{SMTC period}, \text{DRX cycle})) \times \text{CSSF}_{\text{intra}}$
DRX cycle $> 320\text{ms}$	$7 \times \max(\text{MGRP}, \text{DRX cycle}) \times \text{CSSF}_{\text{intra}}$

If higher layer filtering is configured, an additional delay in evaluation to initiate/cease SLSS transmissions can be expected.

For the NR cell as synchronization reference source:

- SS-RSRP related side conditions given in clauses 10.1.2 for FR1, respectively, for a corresponding Band,
- SS-RSRQ related side conditions given in clauses 10.1.7 for FR1, respectively, for a corresponding Band,
- SS-SINR related side conditions given in clauses 10.1.12 for FR1, respectively, for a corresponding Band,
- SSB_{RP} and SSB $\hat{E}_s/I_{ot}$ according to Annex B.2.2 for a corresponding Band.

12.3.1.2 Initiation/Cease of SLSS transmissions with EUTRAN cell as synchronization reference source

The requirements apply when the EUTRAN Cell is used as synchronization reference source and when the UE is

- out of coverage on the V2X NR sidelink carrier and in-coverage with a serving cell on a LTE non-V2X sidelink carrier,

and when the conditions for SLSS transmissions specified in TS 36.331[16] are met; *networkControlledSyncTx* is not configured; and *syncTxThreshIC* is included in *SystemInformationBlockType28*. The UE shall be capable of measuring the RSRP of the cell used as synchronization reference source to evaluate to initiate/cease SLSS transmissions within $T_{\text{evaluate,SLSS}}$

where,

- $T_{\text{evaluate,SLSS}} = 0.4$ seconds when UE is not configured with DRX.
- $T_{\text{evaluate,SLSS}} =$ as specified in Table 12.3.1.2-1 when UE is configured with DRX.

Table 12.3.1.2-1: $T_{\text{evaluate,SLSS}}$ when EUTRAN cell is used as synchronization reference source

DRX cycle length in EUTRAN cell[s]	$T_{\text{evaluate,SLSS}}$ [s] (number of DRX cycles)
≤ 0.04	0.4 (Note 1)
$0.04 < \text{DRX-cycle} \leq 2.56$	Note 2 (6)
Note1: Number of DRX cycles depends upon the DRX cycle in use	
Note2: Time depends upon the DRX cycles in use	

If higher layer filtering is configured, an additional delay in evaluation to initiate/cease SLSS transmissions can be expected.

For the cell as synchronization reference source:

- RSRP related side conditions given in TS 36.133[15] Clauses 9.1.2.1 and 9.1.2.2 and RSRQ related side conditions given in TS 36.133[15] Clause 9.1.5.1 for a corresponding Band are fulfilled,
- SCH_{RP} and SCH_{Es/Iot} according to TS 36.133[15] Annex B.2.1 for a corresponding Band are fulfilled.

12.3.1.3 Initiation/Cease of SLSS transmissions with GNSS as synchronization reference source

The requirements apply when GNSS is used as synchronization reference source and when the UE is

- out of coverage on the V2X sidelink carrier and in-coverage with a serving cell on a non-V2X sidelink carrier, or
- in coverage with a serving cell on a NR V2X sidelink carrier,

and when the conditions for SLSS transmissions specified in TS 38.331[2] are met; *networkControlledSyncTx* is not configured; and *syncTxThreshIC* is included in *SystemInformationBlockType12* in a NR cell.

When the conditions for SLSS transmissions specified in TS 36.331[16] are met; *networkControlledSyncTx* is not configured; and *syncTxThreshIC* is included in *SystemInformationBlockType28* in a EUTRAN cell.

The requirements in Clause 12.3.1.1 shall apply if the serving cell is a NR cell.

The requirements in Clause 12.3.1.2 shall apply if the serving cell is a EUTRAN cell.

12.3.1.4 Initiation/Cease of SLSS transmissions with SyncRef UE as synchronization reference source

The requirements apply when SyncRef UE is used as synchronization reference source and when the UE is

- in any cell selection state, or
- out of coverage on the V2X sidelink carrier and is associated with a serving cell on a non-V2X sidelink carrier, or
- in coverage with a serving cell on a NR V2X sidelink carrier,

and when the conditions for SLSS transmissions specified in TS 38.331[2] are met and when SyncRef UE is used as synchronization reference source and if *syncTxThreshOoC* is included in the preconfigured V2X parameters.

The UE shall be capable of measuring the PSBCH-RSRP of the selected SyncRef UE used as synchronization reference source and evaluate it to initiate/cease SLSS transmissions within $T_{\text{evaluate,SLSS}}$, as shown in Table 12.3.1.4-1.

Table 12.3.1.4-1: $T_{\text{evaluate,SLSS}}$ when SyncRef UE is used as synchronization reference source

SL-DRX cycle ^{Note 1} [ms]	$T_{\text{evaluate,SLSS}}$ [ms]
No SL-DRX	4 x S-SSB periods
SL-DRX cycle ≤ 160 ms	4 x S-SSB periods
SL-DRX cycle > 160 ms	4 x SL-DRX cycle
Note 1: If multiple SL-DRX cycles are configured for SL UE, the SL-DRX cycle in the requirement is the shortest one. When the shortest SL-DRX cycle UE used changes, the requirements do not apply to the time of transition.	

If higher layer filtering for PSBCH-RSRP measurements is pre-configured, an additional delay in evaluation to initiate/cease SLSS transmissions can be expected.

For the selected SyncRef UE as defined in TS 38.331 [2] used to derive transmission timing for V2X sidelink communication:

- PSBCH-RSRP related side conditions given in Clause 12.4 for a corresponding Band are fulfilled,

- V2X S-SSB_{RP} and S-SSB $\hat{E}_s/I_{ot}$ according to Annex B. 4 for a corresponding Band are fulfilled.

12.4 Selection / Reselection of V2X Synchronization Reference Source

The requirements defined in this clause do not apply to the UEs that do not support transmission and reception of SLSS.

A SyncRef UE is considered to be detectable when

- PSBCH-RSRP related side conditions given in Clause 10 are fulfilled for a corresponding Band,
- S-SSB_{RP} and S-SSB $\hat{E}_s/I_{ot}$ according to Annex B.4.3 for a corresponding Band are fulfilled.

When GNSS synchronization reference source is configured as the highest priority and

- UE is synchronized to GNSS directly,
- UE shall not drop any V2X SLSS and data transmission for the purpose of selection/reselection to the SyncRef UE.
- UE is synchronized to a SyncRef UE that is synchronized to GNSS directly or in-directly,
- UE shall not drop any V2X data transmission for the purpose of selection/reselection to the SyncRef UE. The UE shall be able to identify newly detectable intra-frequency SyncRef UE within $T_{\text{detect,SyncRef UE_V2X}}$ seconds if the SyncRef UE meets the selection / reselection criterion defined in TS 38.331[2]. $T_{\text{detect,SyncRef UE_V2X}}$ is defined as 1.6 seconds at S-SSB $\hat{E}_s/I_{ot} \geq 0$ dB, provided that the UE is allowed to drop a maximum of 30% of its SLSS transmissions during $T_{\text{detect,SyncRef UE_V2X}}$ for the purpose of selection / reselection to the SyncRef UE.
- in other case
- When UE is in non-SL-DRX
 - The UE shall be able to identify newly detectable intra-frequency SyncRef UE within $T_{\text{detect,SyncRef UE_V2X}}$ seconds if the SyncRef UE meets the selection / reselection criterion defined in TS 38.331[2]. $T_{\text{detect,SyncRef UE_V2X}}$ is defined as 8 seconds at S-SSB $\hat{E}_s/I_{ot} \geq 0$ dB, provided that the UE is allowed to drop a maximum of 6 % of its V2X data and SLSS transmissions during $T_{\text{detect,SyncRef UE_V2X}}$ for the purpose of selection / reselection to the SyncRef UE.
 - UE is allowed to drop up to 2 slots of its V2X data reception per PSBCH monitoring occasion and overall drop rate shall not exceed 0.3% of its V2X data reception during $T_{\text{detect,SyncRef UE_V2X}}$ for the purpose of selection / reselection to the SyncRef UE.
- When UE is in SL-DRX
 - UE shall be able to identify newly detectable intra-frequency SyncRef UE within $T_{\text{detect,SyncRef UE_V2X}}$ seconds if the SyncRef UE meets the selection / reselection criterion defined in TS 38.331[2]. $T_{\text{detect,SyncRef UE_V2X}}$ is defined as 8 seconds at S-SSB $\hat{E}_s/I_{ot} \geq 0$ dB, provided that the V2X UE is allowed to drop a maximum of 6 % of its V2X data and SLSS transmissions for the purpose of selection / reselection to the SyncRef UE.
 - UE is allowed to drop up to 2 slots of its V2X data reception per PSBCH monitoring occasion and UE is allowed to drop at most an aggregated window of 24ms of its V2X data reception during $T_{\text{detect,SyncRef UE_V2X}}$ for the purpose of selection / reselection to the SyncRef UE.
 - The UE is allowed to extend $T_{\text{detect,SyncRef UE_V2X}}$ to $\max(4 \times 50 \text{ SL-DRX cycle length, } 8\text{s})$ when the following conditions are satisfied over an evaluation period $T_{\text{evaluate,SLSS}}$ in clause 12.3.1.1 if an NR cell is used as synchronization reference source, or $T_{\text{evaluate,SLSS}}$ in clause 12.3.1.2 if an EUTRA cell is used as synchronization reference source, or $T_{\text{evaluate,SLSS}}$ in clause 12.3.1.4 if an SLSS is used as synchronization reference source. If multiple SL-DRX cycles are configured, the SL-DRX cycle length is the longest one.
 - SS-RSRP is larger than syncTxThreshOoC .

When serving cell/PCell synchronization reference source is configured as the highest priority,

- When UE is in non-SL-DRX
- UE shall be able to identify newly detectable intra-frequency SyncRef UE within $T_{\text{detect,SyncRef UE_V2X}}$ seconds if the SyncRef UE meets the selection / reselection criterion defined in TS 38.331[2]. $T_{\text{detect,SyncRef UE_V2X}}$ is defined as 8 seconds at SCH Es/Iot ≥ 0 dB, provided that the V2X UE is allowed to drop a maximum of 6 % of its V2X data and SLSS transmissions for the purpose of selection / reselection to the SyncRef UE.
- UE is allowed to drop up to 2 slots of its V2X data reception per PSBCH monitoring occasion and overall drop rate shall not exceed 0.3% of its V2X data reception during $T_{\text{detect,SyncRef UE_V2X}}$ for the purpose of selection / reselection to the SyncRef UE.
- When UE is in SL-DRX
 - The UE shall be able to identify newly detectable intra-frequency SyncRef UE within $T_{\text{detect,SyncRef UE_V2X}}$ seconds if the SyncRef UE meets the selection / reselection criterion defined in TS 38.331[2]. $T_{\text{detect,SyncRef UE_V2X}}$ is defined as 8 seconds at SCH Es/Iot ≥ 0 dB, provided that the UE is allowed to drop its V2X data and SLSS transmissions at most in an aggregated window of 480ms during $T_{\text{detect,SyncRef UE_V2X}}$ for the purpose of selection / reselection to the SyncRef UE.
 - UE is allowed to drop up to 2 slots of its V2X data reception per PSBCH monitoring occasion and UE is allowed to drop at most an aggregated window of 24ms of its V2X data reception during $T_{\text{detect,SyncRef UE_V2X}}$ for the purpose of selection / reselection to the SyncRef UE.
 - The UE is allowed to extend $T_{\text{detect,SyncRef UE_V2X}}$ to $\max(4 \times 50 \text{ SL-DRX cycle length, } 8\text{s})$ when the following conditions are satisfied over an evaluation period $T_{\text{evaluate,SLSS}}$ in clause 12.3.1.1 if an NR cell is used as synchronization reference source, or $T_{\text{evaluate,SLSS}}$ in clause 12.3.1.2 if an EUTRA cell is used as synchronization reference source, or $T_{\text{evaluate,SLSS}}$ in clause 12.3.1.4 if an SLSS is used as synchronization reference source. If multiple SL-DRX cycles are configured, the SL-DRX cycle length is the longest one.
 - SS-RSRP is larger than *syncTxThreshOoC*.

UE shall be capable of performing PSBCH-RSRP measurements for 3 identified intra-frequency SyncRef UE with the measurement period of $T_{\text{measure,PSBCH-RSRP}}$ in Table 12.4-1. It is assumed that the SyncRef UE do not drop or delay any SLSS transmission within the measurement period. Otherwise, the measurement period may be extended.

Table 12.4-1: PSBCH-RSRP measurement period for intra-frequency SyncRef UE

SL-DRX cycle ^{Note 1} [ms]	$T_{\text{measure,PSBCH-RSRP}}$ [ms]
No SL-DRX	320
SL-DRX cycle $\leq 160\text{ms}$	320
SL-DRX cycle $> 160\text{ms}$	2 x SL-DRX cycle
Note 1: If multiple SL-DRX cycles are configured, the SL-DRX cycle is the shortest one.	

When UE is synchronized to GNSS directly, before selection / reselection of the new synchronization reference source UE shall evaluate the GNSS synchronization source reliability for at least 20 seconds before changing the synchronization reference from GNSS to another synchronization reference source. UE shall be always synchronized to GNSS directly during the evaluation of GNSS synchronization source reliability.

12.5 L1 SL-RSRP measurements

12.5.1 Introduction

This clause contains the measurement requirements related to resource reselection and resource pre-emption of the UE capable of V2X sidelink communication.

12.5.2 SL-RSRP measurements

The UE physical layer shall be capable of performing the L1 SL-RSRP measurements on the carrier operating V2X sidelink communication for determining the subset of resources to be excluded in PSSCH resource selection in sidelink

transmission mode 2. The L1 SL-RSRP measurement period corresponds to one slot and the measurement shall meet the L1 SL-RSRP measurement accuracy requirement in Clause 10. After resource (re-)selection procedure, re-evaluation is performed on the reserved resources by L1 SL-RSRP measurements before transmission of SCI with reservation when the conditions specified in TS 38.214[26] are satisfied.

When the pre-emption mechanism is enabled for the resource pool that UE is monitoring and selecting resource from, after UE selects from the resource not excluded based on L1 SL-RSRP measurement procedure, the UE shall be capable of triggering reselection of already signalled resource(s) as a resource reservation when the conditions specified in TS38.214[26] are satisfied.

When partial sensing mechanism is enabled for the resource pool that UE is monitoring and selecting resource from, the UE shall be capable of performing the L1 SL-RSRP measurements on the sensing periods specified in TS38.214[26]. When SL-DRX is enabled, the UE shall be capable of performing the L1 SL-RSRP measurements and select resource during SL-DRX active time as specified in TS38.214[26].

12.6 Congestion Control measurements

The UE shall be capable of estimating the channel busy ratio for one or more transmission pools indicated by higher layers in TS 38.331[2], based on SL-RSSI measurements provided by the physical layer.

When no sidelink transmissions occur, the UE physical layer shall perform a single-shot SL-RSSI measurement for each sub-channel included in all the slots configured as transmission pools.

The SL-RSSI measurement performed according to this clause shall meet the SL-RSSI measurement accuracy requirements defined in Clause 10.

The UE shall perform channel busy ratio (CBR) measurement based on SL-RSSI measurements as described in TS 38.215 [4].

12.7 Interruption

12.7.1 Interruptions to WAN due to V2X Sidelink Communication

This clause contains the requirements related to the interruptions on the PCell/serving cell due to V2X sidelink communication.

A UE capable of V2X sidelink communication may indicate its interest (initiation or termination) in V2X sidelink communication to the connected gNodeB using IE *SidelinkUEInformationNR* in TS38.331[2].

The UE is allowed an interruption of up to the duration shown in table 12.7.1-1 on the PCell/serving cell during the RRC reconfiguration procedure that includes the V2X sidelink communication configuration message *SL-ConfigDedicatedNR* in TS 38.331[2] (setup and release). This interruption is for both uplink and downlink of the PCell/serving cell.

Table 12.7.1-1: Interruption length at V2X RRC reconfiguration

μ	NR Slot length (ms)	Interruption length (number of slots)
0	1	2
1	0.5	3
2	0.25	5
3	0.125	9

12.7.2 V2X Sidelink Communication Dropping due to synchronization source change

This clause contains the requirements related to the interruptions on the V2X sidelink communication due to synchronization source change.

For NR V2X UE not supporting gNB/eNB as synchronization reference source, UE is allowed to drop LTE and NR V2X SL transmission or reception for up to 1ms when synchronization source is changed, where the drop of LTE V2X SL transmission or reception applies only to in-device coexistence scenario in TS38.213 [3]:

- From GNSS
 - to syncRef UE that is synchronized to GNSS directly/in-directly
 - to syncRef UE that has the lowest priority
- From syncRef UE that is synchronized to GNSS directly/in-directly
 - to GNSS
 - to syncRef UE that has the lowest priority
- From syncRef UE that has the lowest priority
 - to GNSS
 - to syncRef UE that is synchronized to GNSS directly/in-directly
 - to syncRef UE that has the lowest priority

For NR V2X UE supporting gNB/eNB as synchronization reference source, UE is allowed to drop LTE and NR V2X SL transmission or reception for up to 1ms when synchronization source is changed, where the drop of LTE V2X SL transmission or reception applies only to in-device coexistence scenario in TS38.213 [3]:

- From GNSS
 - to syncRef UE that is synchronized to GNSS directly/in-directly
 - to gNB/eNB
 - to syncRef UE that is synchronized to gNB/eNB directly
 - to syncRef UE that is synchronized to gNB/eNB in-directly
 - to syncRef UE that has the lowest priority
- From syncRef UE that is synchronized to GNSS directly/in-directly
 - to GNSS
 - to gNB/eNB
 - to syncRef UE that is synchronized to gNB/eNB directly
 - to syncRef UE that is synchronized to gNB/eNB in-directly
 - to syncRef UE that has the lowest priority
- From gNB or eNB
 - to GNSS
 - to syncRef UE that is synchronized to GNSS directly/in-directly
 - to eNB or gNB
 - to syncRef UE that is synchronized to gNB or eNB directly

- to syncRef UE that is synchronized to gNB or eNB in-directly
- to syncRef UE that has the lowest priority
- From syncRef UE that is synchronized to gNB/eNB directly
 - to GNSS
 - to syncRef UE that is synchronized to GNSS directly/in-directly
 - to gNB/eNB
 - to syncRef UE that is synchronized to gNB/eNB directly
 - to syncRef UE that is synchronized to gNB/eNB in-directly
 - to syncRef UE that has the lowest priority
- From syncRef UE that is synchronized to gNB/eNB in-directly
 - to GNSS
 - to syncRef UE that is synchronized to GNSS directly/in-directly
 - to gNB/eNB
 - to syncRef UE that is synchronized to gNB/eNB directly
 - to syncRef UE that is synchronized to gNB/eNB in-directly
 - to syncRef UE that has the lowest priority
- From syncRef UE that has the lowest priority
 - to GNSS
 - to syncRef UE that is synchronized to GNSS directly
 - to syncRef UE that is synchronized to GNSS in-directly
 - to gNB/eNB
 - to syncRef UE that is synchronized to gNB/eNB directly
 - to syncRef UE that is synchronized to gNB/eNB in-directly
 - to syncRef UE that has the lowest priority

UE is allowed to interruption any V2X sidelink signals including PSSCH, PSCCH, PSBCH, PSFCH and SLSS signals.

12.7.3 Interruptions to WAN due to switching between E-UTRA V2X Sidelink and NR V2X Sidelink

This sub-clause contains the requirements related to the interruptions on the PCell/serving cell due to switching between E-UTRA V2X sidelink and NR V2X sidelink transmissions on a dedicated carrier. It is applicable for UE capable of both NR V2X sidelink and E-UTRA V2X sidelink transmissions in TDM-ed manner.

When a UE capable of switching between E-UTRA V2X sidelink and NR V2X sidelink, the UE is allowed an interruption of up to the duration shown in table 12.7.3-1 on the PCell/serving cell during the E-UTRA V2X sidelink and NR V2X sidelink switch.

This interruption is for both uplink and downlink of the PCell/serving cell.

Table 12.7.3-1: Interruption length due to switching between E-UTRA V2X and NR V2X

μ	Slot length (ms)	Interruption length (number of slots)
0	1	2
1	0.5	2
2	0.25	2
3	0.125	3

12.7.4 Interruptions to WAN at transitions between active and non-active during SL-DRX

Interruption on PCell/serving cell if configured due to V2X transitions between active and non-active during SL-DRX are allowed with up to 1% probability of missed ACK/NACK when the configured SL-DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured SL-DRX cycle is 640 ms or longer. When multiple SL-DRX cycles are configured, the shortest SL-DRX cycle is applied. Each interruption shall not exceed X slot as defined in table 12.7.4-1.

Table 12.7.4-1: Interruption length X at transition between active and non-active during SL-DRX

μ	NR Slot length (ms)	Interruption length X (slots)	
		Sync	Async
0	1	1	2
1	0.5	1	2
2	0.25	3	

For SL-DRX active to inactive state transition, when the UE is in non-DRX or DRX on WAN and V2X is in sidelink resource allocation mode 2, the interruptions in this clause shall not apply when one of the following conditions is met:

- While receiving paging,
- While receiving system information.

In addition, for SL-DRX active to inactive state transition, when the UE is in non-DRX or DRX on WAN and V2X is in sidelink resource allocation mode 2 and SL DRX cycle is less than 320 ms, the interruptions in this clause shall not apply when one of the following conditions is met:

- T310 timer is running for RLF on PCell
- performing candidate beam detection on PCell/serving cell as specified in section 8.5.5. and 8.5.6

During the U2N relay operation as defined in clause 5.8.14 [2], the interruption requirements defined in this clause apply only to the sidelink relay UE.

12.7.5 Interruptions to V2X sidelink at transitions between active and non-active during DRX

Interruption on V2X sidelink if configured due to PCell transitions between active and non-active during DRX are allowed with up to 1% probability of missed ACK/NACK when the configured DRX cycle is less than 640 ms, and 0.625% probability of missed ACK/NACK is allowed when the configured DRX cycle is 640 ms or longer. It is only applied when HARQ process on V2X sidelink is supported. Each interruption shall not exceed X slot as defined in table 12.7.5-1.

Table 12.7.5-1: Interruption length X at transition between active and non-active during DRX

μ	NR V2X Slot length (ms)	Interruption length X (slots)	
		Sync	Async
0	1	1	2
1	0.5	1	2
2	0.25	3	

12.7.6 Interruptions to V2X sidelink due to Active BWP switching Requirement

This clause contains the requirements related to the interruptions on the V2X sidelink due to BWP switch in FDM based intra-band concurrent V2X operation.

The requirements in clause 8.2.2.2.5 shall apply. The interrupted X slot is defined in Table 12.7.6-1.

Table 12.7.6-1: Interruption length X

μ	NR V2X Slot length (ms)	Interruption length X (slots)
0	1	1
1	0.5	1
2	0.25	3

Note: No sidelink communication happens during BWP switching delay period for TDM based intra-band concurrent operation.

12.7.7 Interruptions to WAN due to SyncRef UE detection and/or Sensing during SL DRX off duration

This sub-clause contains the requirements related to the interruptions on the PCell/serving cell due to SyncRef UE detection and/or Sensing during SL DRX off duration.

The requirements in clause 12.7.4 shall apply.

12.7.8 Interruptions at NR sidelink discovery configuration

This clause contains the requirements related to the interruptions on the PCell/serving cell due to NR sidelink discovery.

A UE capable of NR sidelink discovery may indicate its interest (initiation or termination) in NR sidelink discovery to the connected gNodeB using IE *SidelinkUEInformationNR* in TS38.331[2].

The UE is allowed an interruption of up to the duration shown in Table 12.7.8-1 on the PCell/serving cell during the RRC reconfiguration procedure that includes the NR sidelink discovery configuration message *sl-DiscConfig* in TS 38.331[2] (setup and release). This interruption is for both uplink and downlink of the PCell/serving cell.

12.7.8-1: Interruption length at NR sidelink discovery configuration

μ	NR Slot length (ms)	Interruption length (number of slots)
0	1	2
1	0.5	3
2	0.25	5
3	0.125	9

12.8 Reliability of GNSS signal

This clause contains requirements regarding reliability of GNSS signal for the UE capable of V2X sidelink communication under the following additional condition:

- The UE is configured or pre-configured with parameters for enabling the UE to acquire the GNSS synchronization.

If UE considers GNSS is a reliable synchronization reference, the UE shall meet timing accuracy requirement as specified in 12.2 and frequency accuracy requirement as specified in 6.4E of TS38.101-1[18]. Otherwise, the UE shall be capable to select another synchronization reference source.

12.9 Scheduling availability

12.9.1 Scheduling availability of UE switching between E-UTRA sidelink and NR sidelink

This clause contains the restrictions on the scheduling availability for V2X sidelink due to switching between E-UTRA V2X sidelink and NR V2X sidelink transmission on a dedicated carrier. For the NR V2X sidelink, the assumed number of configured symbols in a slot is 14.

When switch from E-UTRA V2X sidelink to NR V2X sidelink occurs in NR slot 'n',

- UE is not expected to transmit or receive on NR V2X sidelink on the slot 'n'.

When switch from NR V2X sidelink to E-UTRA V2X sidelink occurs in NR slot 'n-1',

- UE is not expected to transmit or receive on NR V2X sidelink on the slot 'n-1'.

When switch from NR V2X sidelink to E-UTRA V2X sidelink occurs in E-UTRA subframe 'n',

- UE is not expected to transmit or receive on E-UTRA V2X sidelink on the subframe 'n'.

When switch from E-UTRA V2X sidelink to NR V2X sidelink occurs in E-UTRA subframe 'n-1',

- UE is not expected to transmit or receive E-UTRA on V2X sidelink on the subframe 'n-1'.

12.9.2 Scheduling availability of UE switching between Uu uplink and V2X sidelink

This clause contains the restrictions on the scheduling availability for V2X sidelink due to switching between Uu uplink and V2X sidelink. For NR V2X sidelink, the assumed number of configured symbols in a slot is 14.

When switch from Uu uplink slot to V2X sidelink slot occurs in sidelink slot 'n',

- UE is not expected to transmit or receive on V2X sidelink on the sidelink slot 'n'.

When switch from V2X sidelink slot to Uu uplink slot occurs in sidelink slot 'n-1',

- UE is not expected to transmit or receive on V2X sidelink on the sidelink slot 'n-1'.

When switch from V2X sidelink slot to Uu uplink slot occurs in Uu slot 'n',

- UE is not expected to transmit uplink or receive downlink on the Uu slot 'n'.

When switch from Uu uplink slot to V2X sidelink slot occurs in Uu slot 'n-1',

- UE is not expected to transmit uplink or receive downlink on the Uu slot 'n-1'.
- UE is not expected to transmit uplink or receive downlink on the Uu slot 'n-1'.

12.10 Selection / Reselection of relay UE

12.10.1 Introduction

This section contains the requirements related to selection and reselection of relay UE.

The requirements apply for the selection and reselection of candidate relay UEs that are transmitting relay discovery signals within the resource pool as configured for the remote UE.

12.10.2 Selection / Reselection of relay UE

For a remote UE configured by upper layer for relay operation, the remote UE shall search for candidate relay UEs for selection and/or reselection every discovery period which is determined by resource reservation period or SPS transmission periodicity configured by network.

If the remote UE has a selected sidelink relay UE, then the remote UE shall measure the SD-RSRP or SL-RSRP of the selected relay once in every four discovery periods and evaluate if it meets the relay selection criterion as defined in TS 38.331[2] (clause 5.8.15.3).

The remote UE shall measure SD-RSRP or SL-RSRP of the candidate relay UEs every $T_{\text{measure, SL_Relay_Intra}}$ for relay UEs that are detected and measured according to the measurement rules.

For intra-frequency relay UEs that are detected, but that has not been selected or reselected to, the remote UE shall be capable of evaluating that the intra-frequency relay UE has met selection or reselection criterion defined in TS 38.331[2] (clause 5.8.15.3) within $T_{\text{evaluate, SL_Relay_Intra}}$ as specified in table 12.10.2-1.

The minimum requirements are required to meet when the selected and candidate relay UEs are transmitting relay discovery message every discovery period.

Table 12.10.2-1: $T_{\text{measure, SL_Relay_Intra}}$ and $T_{\text{evaluate, SL_Relay_Intra}}$

Discovery Period [s]	$T_{\text{measure, SL_Relay_Intra}}$ [s] (number of discovery periods)	$T_{\text{evaluate, SL_Relay_Intra}}$ [s] (number of discovery periods)
$0.04 \leq \text{Discovery period} \leq 10.24$	Note 1 (4)	Note 1 (16)
Note 1: Time depends upon the discovery period which is resource reservation period (in mode 2) or SPS transmission periodicity (in mode 1). Note 2: SL-RSRP or SD-RSRP can be derived from PSCCH-DMRS and/or PSSCH-DMRS.		

13 Measurement Performance Requirements for NR gNB

13.1 UL-RTOA

13.1.1 Report mapping

The reporting range of UL Relative Time of Arrival (UL-RTOA), as defined in Clause 5.2.2 of TS 38.215 [4], is defined from $-985024T_c$ to $+985024T_c$. The reporting resolution is uniform across the reporting range and is defined as $T = T_c \cdot 2^k$ where k is selected by gNB from the set $\{0, 1, 2, 3, 4, 5\}$.

T_c is defined in TS 38.211 [6].

LMF provides a recommended resolution parameter, *timingReportingGranularityFactor* [35]. gNB selects parameter k based on *timingReportingGranularityFactor* [35] and informs the LMF.

The mapping of measured quantity for each reporting resolution (k) is defined in Table 13.1.1-1 to Table 13.1.1-6.

Table 13.1.1-1: UL-RTOA measurement report mapping for reporting resolution of T_c (k=0)

Reported Value	Measured Quantity Value	Unit
UL_RTOA_0000	$-985024 > \text{UL_RTOA}$	T_c
UL_RTOA_0001	$-985024 \leq \text{UL_RTOA} < -985023$	T_c
UL_RTOA_0002	$-985023 \leq \text{UL_RTOA} < -985022$	T_c
...	...	...
UL_RTOA_985023	$-2 \leq \text{UL_RTOA} < -1$	T_c
UL_RTOA_985024	$-1 \leq \text{UL_RTOA} \leq 0$	T_c
UL_RTOA_985025	$0 < \text{UL_RTOA} \leq 1$	T_c
UL_RTOA_985026	$1 < \text{UL_RTOA} \leq 2$	T_c
UL_RTOA_985027	$2 < \text{UL_RTOA} \leq 3$	T_c
...	...	...
UL_RTOA_1970048	$985023 < \text{UL_RTOA} \leq 985024$	T_c
UL_RTOA_1970049	$985024 < \text{UL_RTOA}$	T_c

Table 13.1.1-2: UL-RTOA measurement report mapping for reporting resolution of $2T_c$ (k=1)

Reported Value	Measured Quantity Value	Unit
UL_RTOA_0000	$-985024 > \text{UL_RTOA}$	T_c
UL_RTOA_0001	$-985024 \leq \text{UL_RTOA} < -985022$	T_c
UL_RTOA_0002	$-985022 \leq \text{UL_RTOA} < -985020$	T_c
...	...	...
UL_RTOA_492511	$-4 \leq \text{UL_RTOA} < -2$	T_c
UL_RTOA_492512	$-2 \leq \text{UL_RTOA} \leq 0$	T_c
UL_RTOA_492513	$0 < \text{UL_RTOA} \leq 2$	T_c
UL_RTOA_492514	$2 < \text{UL_RTOA} \leq 4$	T_c
UL_RTOA_492515	$4 < \text{UL_RTOA} \leq 6$	T_c
...	...	...
UL_RTOA_985024	$985022 < \text{UL_RTOA} \leq 985024$	T_c
UL_RTOA_985025	$985024 < \text{UL_RTOA}$	T_c

Table 13.1.1-3: UL-RTOA measurement report mapping for reporting resolution of $4T_c$ (k=2)

Reported Value	Measured Quantity Value	Unit
UL_RTOA_0000	$-985024 > \text{UL_RTOA}$	T_c
UL_RTOA_0001	$-985024 \leq \text{UL_RTOA} < -985020$	T_c
UL_RTOA_0002	$-985020 \leq \text{UL_RTOA} < -985018$	T_c
...	...	...
UL_RTOA_246255	$-8 \leq \text{UL_RTOA} < -4$	T_c
UL_RTOA_246256	$-4 \leq \text{UL_RTOA} \leq 0$	T_c
UL_RTOA_246257	$0 < \text{UL_RTOA} \leq 4$	T_c
UL_RTOA_246258	$4 < \text{UL_RTOA} \leq 8$	T_c
UL_RTOA_246259	$8 < \text{UL_RTOA} \leq 12$	T_c
...	...	...
UL_RTOA_492512	$985020 < \text{UL_RTOA} \leq 985024$	T_c
UL_RTOA_492513	$985024 < \text{UL_RTOA}$	T_c

Table 13.1.1-4: UL-RTOA measurement report mapping for reporting resolution of $8T_c$ (k=3)

Reported Value	Measured Quantity Value	Unit
UL_RTOA_0000	$-985024 > \text{UL_RTOA}$	T_c
UL_RTOA_0001	$-985024 \leq \text{UL_RTOA} < -985016$	T_c
UL_RTOA_0002	$-985016 \leq \text{UL_RTOA} < -985008$	T_c
...	...	...
UL_RTOA_123127	$-16 \leq \text{UL_RTOA} < -8$	T_c
UL_RTOA_123128	$-8 \leq \text{UL_RTOA} \leq 0$	T_c
UL_RTOA_123129	$0 < \text{UL_RTOA} \leq 8$	T_c

UL_RTOA_123130	$8 < \text{UL_RTOA} \leq 16$	T_c
UL_RTOA_123131	$16 < \text{UL_RTOA} \leq 24$	T_c
...	...	...
UL_RTOA_246256	$985016 < \text{UL_RTOA} \leq 985024$	T_c
UL_RTOA_246257	$985024 < \text{UL_RTOA}$	T_c

Table 13.1.1-5: UL-RTOA measurement report mapping for reporting resolution of $16T_c$ ($k=4$)

Reported Value	Measured Quantity Value	Unit
UL_RTOA_0000	$-985024 > \text{UL_RTOA}$	T_c
UL_RTOA_0001	$-985024 \leq \text{UL_RTOA} < -985008$	T_c
UL_RTOA_0002	$-985008 \leq \text{UL_RTOA} < -984992$	T_c
...	...	...
UL_RTOA_61563	$-32 \leq \text{UL_RTOA} < -16$	T_c
UL_RTOA_61564	$-16 \leq \text{UL_RTOA} \leq 0$	T_c
UL_RTOA_61565	$0 < \text{UL_RTOA} \leq 16$	T_c
UL_RTOA_61566	$16 < \text{UL_RTOA} \leq 32$	T_c
UL_RTOA_61567	$32 < \text{UL_RTOA} \leq 48$	T_c
...	...	...
UL_RTOA_123128	$985008 < \text{UL_RTOA} \leq 985024$	T_c
UL_RTOA_123129	$985024 < \text{UL_RTOA}$	T_c

Table 13.1.1-6: UL-RTOA measurement report mapping for reporting resolution of $32T_c$ ($k=5$)

Reported Value	Measured Quantity Value	Unit
UL_RTOA_0000	$-985024 > \text{UL_RTOA}$	T_c
UL_RTOA_0001	$-985024 \leq \text{UL_RTOA} < -984992$	T_c
UL_RTOA_0002	$-984992 \leq \text{UL_RTOA} < -984960$	T_c
...	...	...
UL_RTOA_30781	$-64 \leq \text{UL_RTOA} < -32$	T_c
UL_RTOA_30782	$-32 \leq \text{UL_RTOA} \leq 0$	T_c
UL_RTOA_30783	$0 < \text{UL_RTOA} \leq 32$	T_c
UL_RTOA_30784	$32 < \text{UL_RTOA} \leq 64$	T_c
UL_RTOA_30785	$64 < \text{UL_RTOA} \leq 96$	T_c
...	...	...
UL_RTOA_61564	$984992 < \text{UL_RTOA} \leq 985024$	T_c
UL_RTOA_61565	$985024 < \text{UL_RTOA}$	T_c

13.1.1A Additional Path Report Mapping for UL-RTOA

The reporting range of additional path reporting for UL Relative Time of Arrival (UL-RTOA), as defined in Clause 5.2.2 of TS 38.215 [4], is defined from $-8175 \times T_c$ to $+8175 \times T_c$. The reporting resolution is uniform across the reporting range and is defined as $T = T_c \times 2^k$ where k is selected by gNB from the set $\{0, 1, 2, 3, 4, 5\}$.

T_c is defined in TS 38.211 [6].

LMF provides a recommended resolution parameter, *timingReportingGranularityFactor* [35]. gNB selects parameter k based on *timingReportingGranularityFactor* [35] and informs the LMF.

The mapping of measured quantity for each reporting resolution (k) is defined in Table 13.1.1A-1 to Table 13.1.1A-6.

Table 13.1.1A-1: UL-RTOA measurement report mapping for resolution of T_c ($k=0$)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_00000	$\Delta\text{path} < -8175$	T_c
path_00001	$-8175 \leq \Delta\text{path} < -8174$	T_c
path_00002	$-8174 \leq \Delta\text{path} < -8173$	T_c
...	...	...
path_08175	$-1 \leq \Delta\text{path} < 0$	T_c

path_08176	$0 \leq \Delta\text{path} < 1$	T_c
...	...	...
path_16349	$8173 \leq \Delta\text{path} < 8174$	T_c
path_16350	$8174 \leq \Delta\text{path} < 8175$	T_c
path_16351	$8175 \leq \Delta\text{path}$	T_c

Table 13.1.1A-2: UL-RTOA measurement report mapping for resolution of $2T_c$ ($k=1$)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	$\Delta\text{path} < -8175$	T_c
path_0001	$-8175 \leq \Delta\text{path} < -8173$	T_c
path_0002	$-8173 \leq \Delta\text{path} < -8171$	T_c
...	...	...
path_4088	$-1 \leq \Delta\text{path} < 1$	T_c
...	...	...
path_8174	$8171 \leq \Delta\text{path} < 8173$	T_c
path_8175	$8173 \leq \Delta\text{path} < 8175$	T_c
path_8176	$8175 \leq \Delta\text{path}$	T_c

Table 13.1.1A-3: UL-RTOA measurement report mapping for resolution of $4T_c$ ($k=2$)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	$\Delta\text{path} < -8174$	T_c
path_0001	$-8174 \leq \Delta\text{path} < -8170$	T_c
path_0002	$-8170 \leq \Delta\text{path} < -8166$	T_c
...	...	...
path_2044	$-2 \leq \Delta\text{path} < 2$	T_c
...	...	...
path_4086	$8166 \leq \Delta\text{path} < 8170$	T_c
path_4087	$8170 \leq \Delta\text{path} < 8174$	T_c
path_4088	$8174 \leq \Delta\text{path}$	T_c

Table 13.1.1A-4: UL-RTOA measurement report mapping for resolution of $8T_c$ ($k=3$)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	$\Delta\text{path} < -8172$	T_c
path_0001	$-8172 \leq \Delta\text{path} < -8164$	T_c
path_0002	$-8164 \leq \Delta\text{path} < -8156$	T_c
...	...	...
path_1022	$-4 \leq \Delta\text{path} < 4$	T_c
...	...	...
path_2042	$8156 \leq \Delta\text{path} < 8164$	T_c
path_2043	$8164 \leq \Delta\text{path} < 8172$	T_c
path_2044	$8172 \leq \Delta\text{path}$	T_c

Table 13.1.1A -5: UL-RTOA measurement report mapping for resolution of $16T_c$ ($k=4$)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	$\Delta\text{path} < -8168$	T_c
path_0001	$-8168 \leq \Delta\text{path} < -8152$	T_c
path_0002	$-8152 \leq \Delta\text{path} < -8136$	T_c
...	...	...
path_511	$-8 \leq \Delta\text{path} < 8$	T_c
...	...	...
path_1020	$8136 \leq \Delta\text{path} < 8152$	T_c

path_1021	$8152 \leq \Delta\text{path} < 8168$	T_c
path_1022	$8168 \leq \Delta\text{path}$	T_c

Table 13.1.1A-6: UL-RTOA measurement report mapping for resolution of $32T_c$ ($k=5$)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_000	$\Delta\text{path} < -8160$	T_c
path_001	$-8160 \leq \Delta\text{path} < -8128$	T_c
path_002	$-8128 \leq \Delta\text{path} < -8096$	T_c
...	...	...
path_256	$0 \leq \Delta\text{path} < 32$	T_c
...	...	...
path_509	$8096 \leq \Delta\text{path} < 8128$	T_c
path_510	$8128 \leq \Delta\text{path} < 8160$	T_c
path_511	$8160 \leq \Delta\text{path}$	T_c

13.2 gNB Rx-Tx time difference

13.2.1 Report mapping

The reporting range of gNB Rx-Tx time difference, as defined in Clause 5.2.3 of TS 38.215 [4], is defined from $-985024T_c$ to $+985024T_c$. The reporting resolution is uniform across the reporting range and is defined as $T = T_c \cdot 2^k$ where k is selected by gNB from the set $\{0, 1, 2, 3, 4, 5\}$.

T_c is defined in TS 38.211 [6].

LMF provides a recommended resolution parameter, *timingReportingGranularityFactor* [35]. gNB selects parameter k based on *timingReportingGranularityFactor* [35] and informs the LMF.

The mapping of measured quantity for each reporting resolution (k) is defined in Table 13.2.1-1 to Table 13.2.1-6.

Table 13.2.1-1: gNB Rx-Tx time difference measurement report mapping for reporting resolution of T_c ($k=0$)

Reported Value	Measured Quantity Value	Unit
RX-TX_0000	$-985024 > \text{RX-TX}$	T_c
RX-TX_0001	$-985024 \leq \text{RX-TX} < -985023$	T_c
RX-TX_0002	$-985023 \leq \text{RX-TX} < -985022$	T_c
...	...	...
RX-TX_985023	$-2 \leq \text{RX-TX} < -1$	T_c
RX-TX_985024	$-1 \leq \text{RX-TX} \leq 0$	T_c
RX-TX_985025	$0 < \text{RX-TX} \leq 1$	T_c
RX-TX_985026	$1 < \text{RX-TX} \leq 2$	T_c
RX-TX_985027	$2 < \text{RX-TX} \leq 3$	T_c
...	...	...
RX-TX_1970048	$985023 < \text{RX-TX} \leq 985024$	T_c
RX-TX_1970049	$985024 < \text{RX-TX}$	T_c

Table 13.2.1-2: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $2T_c$ ($k=1$)

Reported Value	Measured Quantity Value	Unit
RX-TX_0000	$-985024 > \text{RX-TX}$	T_c
RX-TX_0001	$-985024 \leq \text{RX-TX} < -985022$	T_c
RX-TX_0002	$-985022 \leq \text{RX-TX} < -985020$	T_c
...	...	...
RX-TX_492511	$-4 \leq \text{RX-TX} < -2$	T_c

RX-TX_492512	$-2 \leq \text{RX-TX} \leq 0$	T_c
RX-TX_492513	$0 < \text{RX-TX} \leq 2$	T_c
RX-TX_492514	$2 < \text{RX-TX} \leq 4$	T_c
RX-TX_492515	$4 < \text{RX-TX} \leq 6$	T_c
...	...	...
RX-TX_985024	$985022 < \text{RX-TX} \leq 985024$	T_c
RX-TX_985025	$985024 < \text{RX-TX}$	T_c

Table 13.2.1-3: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $4T_c$ ($k=2$)

Reported Value	Measured Quantity Value	Unit
RX-TX_0000	$-985024 > \text{RX-TX}$	T_c
RX-TX_0001	$-985024 \leq \text{RX-TX} < -985020$	T_c
RX-TX_0002	$-985020 \leq \text{RX-TX} < -985018$	T_c
...	...	...
RX-TX_246255	$-8 \leq \text{RX-TX} < -4$	T_c
RX-TX_246256	$-4 \leq \text{RX-TX} \leq 0$	T_c
RX-TX_246257	$0 < \text{RX-TX} \leq 4$	T_c
RX-TX_246258	$4 < \text{RX-TX} \leq 8$	T_c
RX-TX_246259	$8 < \text{RX-TX} \leq 12$	T_c
...	...	...
RX-TX_492512	$985020 < \text{RX-TX} \leq 985024$	T_c
RX-TX_492513	$985024 < \text{RX-TX}$	T_c

Table 13.2.1-4: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $8T_c$ ($k=3$)

Reported Value	Measured Quantity Value	Unit
RX-TX_0000	$-985024 > \text{RX-TX}$	T_c
RX-TX_0001	$-985024 \leq \text{RX-TX} < -985016$	T_c
RX-TX_0002	$-985016 \leq \text{RX-TX} < -985008$	T_c
...	...	...
RX-TX_123127	$-16 \leq \text{RX-TX} < -8$	T_c
RX-TX_123128	$-8 \leq \text{RX-TX} \leq 0$	T_c
RX-TX_123129	$0 < \text{RX-TX} \leq 8$	T_c
RX-TX_123130	$8 < \text{RX-TX} \leq 16$	T_c
RX-TX_123131	$16 < \text{RX-TX} \leq 24$	T_c
...	...	...
RX-TX_246256	$985016 < \text{RX-TX} \leq 985024$	T_c
RX-TX_246257	$985024 < \text{RX-TX}$	T_c

Table 13.2.1-5: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $16T_c$ ($k=4$)

Reported Value	Measured Quantity Value	Unit
RX-TX_0000	$-985024 > \text{RX-TX}$	T_c
RX-TX_0001	$-985024 \leq \text{RX-TX} < -985008$	T_c
RX-TX_0002	$-985008 \leq \text{RX-TX} < -984992$	T_c
...	...	...
RX-TX_61563	$-32 \leq \text{RX-TX} < -16$	T_c
RX-TX_61564	$-16 \leq \text{RX-TX} \leq 0$	T_c
RX-TX_61565	$0 < \text{RX-TX} \leq 16$	T_c
RX-TX_61566	$16 < \text{RX-TX} \leq 32$	T_c
RX-TX_61567	$32 < \text{RX-TX} \leq 48$	T_c
...	...	...
RX-TX_123128	$985008 < \text{RX-TX} \leq 985024$	T_c
RX-TX_123129	$985024 < \text{RX-TX}$	T_c

Table 13.2.1-5: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $32T_c$ ($k=5$)

Reported Value	Measured Quantity Value	Unit
RX-TX_0000	$-985024 > \text{RX-TX}$	T_c
RX-TX_0001	$-985024 \leq \text{RX-TX} < -984992$	T_c
RX-TX_0002	$-984992 \leq \text{RX-TX} < -984960$	T_c
...	...	...
RX-TX_30781	$-64 \leq \text{RX-TX} < -32$	T_c
RX-TX_30782	$-32 \leq \text{RX-TX} \leq 0$	T_c
RX-TX_30783	$0 < \text{RX-TX} \leq 32$	T_c
RX-TX_30784	$32 < \text{RX-TX} \leq 64$	T_c
RX-TX_30785	$64 < \text{RX-TX} \leq 96$	T_c
...	...	...
RX-TX_61564	$984992 < \text{RX-TX} \leq 985024$	T_c
RX-TX_61565	$985024 < \text{RX-TX}$	T_c

13.2.1A Additional Path Report Mapping for gNB Rx-Tx

The reporting range of additional path for gNB Rx-Tx time difference, as defined in Clause 5.2.3 of TS 38.215 [4], is defined from $-8175 \times T_c$ to $8175 \times T_c$. The reporting resolution is uniform across the reporting range and is defined as $T = T_c \times 2^k$ where k is selected by gNB from the set $\{0, 1, 2, 3, 4, 5\}$.

T_c is defined in TS 38.211 [6].

LMF provides a recommended resolution parameter, *timingReportingGranularityFactor* [35]. gNB selects parameter k based on *timingReportingGranularityFactor* [35] and informs the LMF.

The mapping of measured quantity for each reporting resolution (k) is defined in Table 13.2.1A-1 to Table 13.2.1A-6.

Table 13.2.1A-1: gNB Rx-Tx time difference measurement report mapping for reporting resolution of T_c ($k=0$)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_00000	$\Delta\text{path} < -8175$	T_c
path_00001	$-8175 \leq \Delta\text{path} < -8174$	T_c
path_00002	$-8174 \leq \Delta\text{path} < -8173$	T_c
...	...	...
path_08175	$-1 \leq \Delta\text{path} < 0$	T_c
path_08176	$0 \leq \Delta\text{path} < 1$	T_c
...	...	...
path_16349	$8173 \leq \Delta\text{path} < 8174$	T_c
path_16350	$8174 \leq \Delta\text{path} < 8175$	T_c
path_16351	$8175 \leq \Delta\text{path}$	T_c

Table 13.2.1A-2: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $2T_c$ ($k=1$)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	$\Delta\text{path} < -8175$	T_c
path_0001	$-8175 \leq \Delta\text{path} < -8173$	T_c
path_0002	$-8173 \leq \Delta\text{path} < -8171$	T_c
...	...	...
path_4088	$-1 \leq \Delta\text{path} < 1$	T_c
...	...	...
path_8174	$8171 \leq \Delta\text{path} < 8173$	T_c
path_8175	$8173 \leq \Delta\text{path} < 8175$	T_c
path_8176	$8175 \leq \Delta\text{path}$	T_c

Table 13.2.1A-3: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $4T_c$ ($k=2$)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	$\Delta\text{path} < -8174$	T_c
path_0001	$-8174 \leq \Delta\text{path} < -8170$	T_c
path_0002	$-8170 \leq \Delta\text{path} < -8166$	T_c
...	...	...
path_2044	$-2 \leq \Delta\text{path} < 2$	T_c
...	...	...
path_4086	$8166 \leq \Delta\text{path} < 8170$	T_c
path_4087	$8170 \leq \Delta\text{path} < 8174$	T_c
path_4088	$8174 \leq \Delta\text{path}$	T_c

Table 13.2.1A-4: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $8T_c$ ($k=3$)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	$\Delta\text{path} < -8172$	T_c
path_0001	$-8172 \leq \Delta\text{path} < -8164$	T_c
path_0002	$-8164 \leq \Delta\text{path} < -8156$	T_c
...	...	...
path_1022	$-4 \leq \Delta\text{path} < 4$	T_c
...	...	...
path_2042	$8156 \leq \Delta\text{path} < 8164$	T_c
path_2043	$8164 \leq \Delta\text{path} < 8172$	T_c
path_2044	$8172 \leq \Delta\text{path}$	T_c

Table 13.2.1A-5: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $16T_c$ ($k=4$)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_0000	$\Delta\text{path} < -8168$	T_c
path_0001	$-8168 \leq \Delta\text{path} < -8152$	T_c
path_0002	$-8152 \leq \Delta\text{path} < -8136$	T_c
...	...	...
path_511	$-8 \leq \Delta\text{path} < 8$	T_c
...	...	...
path_1020	$8136 \leq \Delta\text{path} < 8152$	T_c
path_1021	$8152 \leq \Delta\text{path} < 8168$	T_c
path_1022	$8168 \leq \Delta\text{path}$	T_c

Table 13.2.1A-6: gNB Rx-Tx time difference measurement report mapping for reporting resolution of $32T_c$ ($k=5$)

Reported Quantity Value, path_i	Measured Quantity Value, Δpath	Unit
path_000	$\Delta\text{path} < -8160$	T_c
path_001	$-8160 \leq \Delta\text{path} < -8128$	T_c
path_002	$-8128 \leq \Delta\text{path} < -8096$	T_c
...	...	...
path_256	$0 \leq \Delta\text{path} < 32$	T_c
...	...	...
path_509	$8096 \leq \Delta\text{path} < 8128$	T_c
path_510	$8128 \leq \Delta\text{path} < 8160$	T_c

path_511	$8160 \leq \Delta\text{path}$	T_c
----------	-------------------------------	-------

13.2.2 Measurement Accuracy Requirements

13.2.2.1 Introduction

This clause defines accuracy requirements for gNB Rx-Tx time difference measurement in FR1 and FR2. The requirements are applicable for gNB supporting gNB Rx-Tx time difference measurement. The gNB, which declares the support for gNB Rx-Tx time difference measurement also declares that it meets gNB Rx-Tx time difference accuracy requirements at least for one side condition $\hat{E}s/I_{ot} \geq +3$ dB or $\hat{E}s/I_{ot} \geq -13$ dB.

13.2.2.2 Requirements

The accuracy requirements for gNB Rx-Tx time difference measurement shall be within $\pm(X+Y) T_c$ under the following conditions:

- AWGN propagation conditions.
- The measured signals are in the directions covered by RoAoA of OTA reference sensitivity requirements for gNB type 1-O and 2-O BS

where

- X is defined in Table 13.2.2.2-1 for gNB types 1-C, 1-H and 1-O and in Table 13.2.2.2-2 for gNB type 2-O.
- Y is declared by manufacturer and can be different for different gNB types 1-C, 1-H, 1-O and 2-O.

Note: The measurement accuracy requirements in Table 13.2.2.2-1 and Table 13.2.2.2-2 are defined under an assumption that gNB is not mandated to perform receive beam sweeping.

Table 13.2.2.2-1: gNB Rx-Tx time difference absolute accuracy in FR1 for gNB type 1-C, 1-H and 1-O

Accuracy	SRS $\hat{E}s/I_{ot}$	SCS	SRS bandwidth range
Unit: Tc	Unit: dB	Unit: kHz	Unit: RB
123	≥ -13	15	$44 \leq BW \leq 84$
48			$88 \leq BW \leq 168$
17			$176 \leq BW$
122	$\geq +3$		$24 \leq BW \leq 40$
62			$44 \leq BW \leq 84$
32			$88 \leq BW \leq 168$
16		$176 \leq BW$	
42	≥ -13	30	$48 \leq BW \leq 84$
24			$88 \leq BW \leq 168$
8			$176 \leq BW$
32	$\geq +3$		$48 \leq BW \leq 84$
17			$88 \leq BW \leq 168$
9			$176 \leq BW$
21	≥ -13	60	$48 \leq BW \leq 84$
12			$88 \leq BW$
16	$\geq +3$		$48 \leq BW \leq 84$
9			$88 \leq BW$

Table 13.2.2.2-2: gNB Rx-Tx time difference absolute accuracy in FR2 for gNB type 2-O

Accuracy	SRS $\hat{E}s/I_{ot}$	SCS	SRS bandwidth range
Unit: Tc	Unit: dB	Unit: kHz	Unit: RB
9	≥ -13	60	$132 \leq BW \leq 168$
8	$\geq +3$		$176 \leq BW$
9			$132 \leq BW \leq 168$
8			$176 \leq BW$
22	≥ -13	120	$32 \leq BW \leq 40$

15	$\geq +3$		$44 \leq BW \leq 84$
8			$88 \leq BW$
16			$32 \leq BW \leq 40$
9			$44 \leq BW \leq 84$
8			$88 \leq BW$

13.3 UL SRS RSRP measurement

13.3.1 Report mapping

The reporting range of UL SRS RSRP, as defined in clause 5.2.5 of 38.215 [4], is defined from -156dBm to -31dBm with resolution 1dB.

The mapping of measured quantity is defined in Table 13.3.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 13.3.1-1: UL SRS RSRP report mapping

Reported value	Measured quantity value	Unit
SRS_RSRP_0	$\text{SRS-RSRP} < -156$	dBm
SRS_RSRP_1	$-156 \leq \text{SRS-RSRP} < -155$	dBm
SRS_RSRP_2	$-155 \leq \text{SRS-RSRP} < -154$	dBm
SRS_RSRP_3	$-154 \leq \text{SRS-RSRP} < -153$	dBm
SRS_RSRP_4	$-153 \leq \text{SRS-RSRP} < -152$	dBm
SRS_RSRP_5	$-152 \leq \text{SRS-RSRP} < -151$	dBm
SRS_RSRP_6	$-151 \leq \text{SRS-RSRP} < -150$	dBm
SRS_RSRP_7	$-150 \leq \text{SRS-RSRP} < -149$	dBm
SRS_RSRP_8	$-149 \leq \text{SRS-RSRP} < -148$	dBm
SRS_RSRP_9	$-148 \leq \text{SRS-RSRP} < -147$	dBm
SRS_RSRP_10	$-147 \leq \text{SRS-RSRP} < -146$	dBm
SRS_RSRP_11	$-146 \leq \text{SRS-RSRP} < -145$	dBm
SRS_RSRP_12	$-145 \leq \text{SRS-RSRP} < -144$	dBm
SRS_RSRP_13	$-144 \leq \text{SRS-RSRP} < -143$	dBm
SRS_RSRP_14	$-143 \leq \text{SRS-RSRP} < -142$	dBm
SRS_RSRP_15	$-142 \leq \text{SRS-RSRP} < -141$	dBm
SRS_RSRP_16	$-141 \leq \text{SRS-RSRP} < -140$	dBm
SRS_RSRP_17	$-140 \leq \text{SRS-RSRP} < -139$	dBm
SRS_RSRP_18	$-139 \leq \text{SRS-RSRP} < -138$	dBm
...	...	...
SRS_RSRP_111	$-46 \leq \text{SRS-RSRP} < -45$	dBm
SRS_RSRP_112	$-45 \leq \text{SRS-RSRP} < -44$	dBm
SRS_RSRP_113	$-44 \leq \text{SRS-RSRP} < -43$	dBm
SRS_RSRP_114	$-43 \leq \text{SRS-RSRP} < -42$	dBm
SRS_RSRP_115	$-42 \leq \text{SRS-RSRP} < -41$	dBm
SRS_RSRP_116	$-41 \leq \text{SRS-RSRP} < -40$	dBm
SRS_RSRP_117	$-40 \leq \text{SRS-RSRP} < -39$	dBm
SRS_RSRP_118	$-39 \leq \text{SRS-RSRP} < -38$	dBm
SRS_RSRP_119	$-38 \leq \text{SRS-RSRP} < -37$	dBm
SRS_RSRP_120	$-37 \leq \text{SRS-RSRP} < -36$	dBm
SRS_RSRP_121	$-36 \leq \text{SRS-RSRP} < -35$	dBm
SRS_RSRP_122	$-35 \leq \text{SRS-RSRP} < -34$	dBm
SRS_RSRP_123	$-34 \leq \text{SRS-RSRP} < -33$	dBm
SRS_RSRP_124	$-33 \leq \text{SRS-RSRP} < -32$	dBm
SRS_RSRP_125	$-32 \leq \text{SRS-RSRP} < -31$	dBm
SRS_RSRP_126	$-31 \leq \text{SRS-RSRP}$	dBm

13.3.2 Measurement accuracy requirements

13.3.2.1 Introduction

This clause defines accuracy requirements for SRS-RSRP measurement in FR1 and FR2. The requirements are applicable for gNB supporting SRS-RSRP measurement. The gNB, which declares the support for SRS-RSRP measurement also declares that it meets SRS-RSRP accuracy requirements at least for one side condition $\hat{E}_s/\text{lot} \geq +3$ dB or $\hat{E}_s/\text{lot} \geq -13$ dB.

13.3.2.2 Requirements

The accuracy requirements in Table 13.3.2.2-1, Table 13.3.2.2-2 and Table 13.3.2.2-3 are valid under the following conditions:

- AWGN propagation conditions.
- The measured signals are in the directions covered by RoAoA of OTA reference sensitivity requirements for gNB type 1-O and 2-O BS

Note: The measurement accuracy requirements in Table 13.3.2.2-1, Table 13.3.2.2-2 and Table 13.3.2.2-3 are defined under an assumption that gNB is not mandated to perform receive beam sweeping.

Table 13.3.2.2-1 gNB SRS-RSRP absolute accuracy requirements in FR1 for gNB type 1-C

Accuracy	Conditions	
	SRS $\hat{E}_s/\text{lot}$	SRS bandwidth range
dB	dB	RB
± 4	$\hat{E}_s/\text{lot} \geq +3$	$24 \leq \text{BW} < 48$
± 4		$48 \leq \text{BW} < 132$
± 4		$132 \leq \text{BW}$
± 6.5	$\hat{E}_s/\text{lot} \geq -13$	$48 \leq \text{BW} < 132$
± 5.5		$132 \leq \text{BW}$

Table 13.3.2.2-2 gNB SRS-RSRP absolute accuracy requirements in FR1 for gNB type 1-H and 1-O

Accuracy	Conditions	
	SRS $\hat{E}_s/\text{lot}$	SRS bandwidth range
dB	dB	RB
± 5.5	$\hat{E}_s/\text{lot} \geq +3$	$24 \leq \text{BW} < 48$
± 5.5		$48 \leq \text{BW} < 132$
± 5.5		$132 \leq \text{BW}$
± 8	$\hat{E}_s/\text{lot} \geq -13$	$48 \leq \text{BW} < 132$
± 7		$132 \leq \text{BW}$

Table 13.3.2.2-3 gNB SRS-RSRP absolute accuracy requirements in FR2 for gNB type 2-O

Accuracy	Conditions	
	SRS $\hat{E}_s/\text{lot}$	SRS bandwidth range
dB	dB	RB
± 5.5	$\hat{E}_s/\text{lot} \geq +3$	$32 \leq \text{BW} < 64$
± 5.5		$64 \leq \text{BW} < 132$
± 5.5		$132 \leq \text{BW}$
± 8	$\hat{E}_s/\text{lot} \geq -13$	$64 \leq \text{BW} < 132$
± 7		$132 \leq \text{BW}$

13.4 AoA/ZoA

13.4.1 Report mapping

The reporting range of UL Angle of Arrival (UL-AoA), as defined in Clause 5.2.4 of TS 38.215 [4], is defined from -180 degree to +180 degree for azimuth angle of arrival (A-AoA). The reporting resolution is 0.1 degree.

The reporting range of UL Angle of Arrival, as defined in Clause 5.2.4 of TS 38.215 [4], is defined from 0 degree to +180 degree for zenith angle of arrival (Z-AoA). The reporting resolution is 0.1 degree.

The mapping of A-AoA measured quantity is defined in Table 13.4.1-1. The mapping of Z-AoA measured quantity is defined in Table 13.4.1-2.

Table 13.4.1-1: Azimuth Angle of Arrival (A-AoA) measurement report mapping

Reported value	Measured quantity value (AoA)	Unit
A-AoA_0	$-180 \leq \text{A-AoA} < -179.9$	degree
A-AoA_1	$-179.9 \leq \text{A-AoA} < -179.8$	degree
A-AoA_2	$-179.8 \leq \text{A-AoA} < -179.7$	degree
...	...	...
A-AoA_1798	$-0.2 \leq \text{A-AoA} < -0.1$	degree
A-AoA_1799	$-0.1 \leq \text{A-AoA} < 0$	degree
A-AoA_1800	$0 \leq \text{A-AoA} < 0.1$	degree
A-AoA_1801	$0.1 \leq \text{A-AoA} < 0.2$	degree
A-AoA_1802	$0.2 \leq \text{A-AoA} < 0.3$	degree
...	...	...
A-AoA_3598	$179.8 \leq \text{A-AoA} < 179.9$	degree
A-AoA_3599	$179.9 \leq \text{A-AoA} < 180$	degree

Table 13.4.1-2: Zenith Angle of Arrival (Z-AoA) measurement report mapping

Reported value	Measured quantity value (ZoA)	Unit
Z-AoA_0	$0 \leq \text{Z-AoA} < 0.1$	degree
Z-AoA_1	$0.1 \leq \text{Z-AoA} < 0.2$	degree
Z-AoA_2	$0.2 \leq \text{Z-AoA} < 0.3$	degree
...	...	...
Z-AoA_1798	$179.8 \leq \text{Z-AoA} < 179.9$	degree
Z-AoA_1799	$179.9 \leq \text{Z-AoA} \leq 180$	degree

13.5 Timing advance (T_{ADV})

13.5.1 Report mapping

The reporting range of T_{ADV} , as defined in Clause 5.2.7 of TS 38.215 [4], is defined from 0 to 3150848 T_c with 128 T_c resolution for timing advance less than 262144 T_c , and 512 T_c for timing advance greater than or equal to 262144 T_c .

T_c is defined in TS 38.211 [6].

The mapping of measured quantity is defined in Table 13.5.1-1.

Table 13.5.1-1: T_{ADV} measurement report mapping

Reported value	Measured quantity value	Unit
TIME_ADVANCE_00	$T_{ADV} < 128$	T_c
TIME_ADVANCE_01	$128 \leq T_{ADV} < 256$	T_c
TIME_ADVANCE_02	$256 \leq T_{ADV} < 384$	T_c
...	...	...
TIME_ADVANCE_2046	$261888 \leq T_{ADV} < 262016$	T_c
TIME_ADVANCE_2047	$262016 \leq T_{ADV} < 262144$	T_c
TIME_ADVANCE_2048	$262144 \leq T_{ADV} < 262656$	T_c
TIME_ADVANCE_2049	$262656 \leq T_{ADV} < 263168$	T_c
...	...	...
TIME_ADVANCE_7688	$3149824 \leq T_{ADV} < 3150336$	T_c
TIME_ADVANCE_7689	$3150336 \leq T_{ADV} < 3150848$	T_c
TIME_ADVANCE_7690	$3150848 \leq T_{ADV}$	T_c

NOTE: For report mapping, T_{ADV} is equal to (gNB Rx – Tx time difference) + N_{TA_offset} , where N_{TA_offset} is based on the information *n-TimingAdvanceOffset* as specified in TS 38.331 [2].

13.6 UL SRS RSRPP measurement

13.6.1 Report mapping

The reporting range of UL SRS RSRPP, as defined in clause 5.2.5 of 38.215 [4], is defined from -156dBm to -31dBm with resolution 1dB.

The mapping of measured quantity is defined in Table 13.6.1-1. The range in the signalling may be larger than the guaranteed accuracy range.

Table 13.6.1-1: UL SRS RSRPP report mapping

Reported value	Measured quantity value	Unit
SRS_RSRPP_0	$SRS_RSRPP < -156$	dBm
SRS_RSRPP_1	$-156 \leq SRS_RSRPP < -155$	dBm
SRS_RSRPP_2	$-155 \leq SRS_RSRPP < -154$	dBm
SRS_RSRPP_3	$-154 \leq SRS_RSRPP < -153$	dBm
SRS_RSRPP_4	$-153 \leq SRS_RSRPP < -152$	dBm
SRS_RSRPP_5	$-152 \leq SRS_RSRPP < -151$	dBm
SRS_RSRPP_6	$-151 \leq SRS_RSRPP < -150$	dBm
SRS_RSRPP_7	$-150 \leq SRS_RSRPP < -149$	dBm
SRS_RSRPP_8	$-149 \leq SRS_RSRPP < -148$	dBm
SRS_RSRPP_9	$-148 \leq SRS_RSRPP < -147$	dBm
SRS_RSRPP_10	$-147 \leq SRS_RSRPP < -146$	dBm
SRS_RSRPP_11	$-146 \leq SRS_RSRPP < -145$	dBm
SRS_RSRPP_12	$-145 \leq SRS_RSRPP < -144$	dBm
SRS_RSRPP_13	$-144 \leq SRS_RSRPP < -143$	dBm
SRS_RSRPP_14	$-143 \leq SRS_RSRPP < -142$	dBm
SRS_RSRPP_15	$-142 \leq SRS_RSRPP < -141$	dBm
SRS_RSRPP_16	$-141 \leq SRS_RSRPP < -140$	dBm
SRS_RSRPP_17	$-140 \leq SRS_RSRPP < -139$	dBm
SRS_RSRPP_18	$-139 \leq SRS_RSRPP < -138$	dBm

...	...	...
SRS_RSRPP_111	$-46 \leq \text{SRS-RSRPP} < -45$	dBm
SRS_RSRPP_112	$-45 \leq \text{SRS-RSRPP} < -44$	dBm
SRS_RSRPP_113	$-44 \leq \text{SRS-RSRPP} < -43$	dBm
SRS_RSRPP_114	$-43 \leq \text{SRS-RSRPP} < -42$	dBm
SRS_RSRPP_115	$-42 \leq \text{SRS-RSRPP} < -41$	dBm
SRS_RSRPP_116	$-41 \leq \text{SRS-RSRPP} < -40$	dBm
SRS_RSRPP_117	$-40 \leq \text{SRS-RSRPP} < -39$	dBm
SRS_RSRPP_118	$-39 \leq \text{SRS-RSRPP} < -38$	dBm
SRS_RSRPP_119	$-38 \leq \text{SRS-RSRPP} < -37$	dBm
SRS_RSRPP_120	$-37 \leq \text{SRS-RSRPP} < -36$	dBm
SRS_RSRPP_121	$-36 \leq \text{SRS-RSRPP} < -35$	dBm
SRS_RSRPP_122	$-35 \leq \text{SRS-RSRPP} < -34$	dBm
SRS_RSRPP_123	$-34 \leq \text{SRS-RSRPP} < -33$	dBm
SRS_RSRPP_124	$-33 \leq \text{SRS-RSRPP} < -32$	dBm
SRS_RSRPP_125	$-32 \leq \text{SRS-RSRPP} < -31$	dBm
SRS_RSRPP_126	$-31 \leq \text{SRS-RSRPP}$	dBm

13.7 gNB Rx-Tx time difference measurements for RTT-based PDC

13.7.1 Report mapping

The reporting range of gNB Rx-Tx time difference, as defined in Clause 5.2.3 of TS 38.215 [4], is defined from $-985024T_c$ to $+985024 \times T_c$. The reporting resolution is uniform across the reporting range and is defined as $T_c \times 32$.

T_c is defined in TS 38.211 [6].

The mapping of measured quantity is defined in Table 13.7.1-1.

Table 13.7.1-1: gNB Rx-Tx time difference measurement report mapping

Reported Value	Measured Quantity Value	Unit
RX-TX_0000	$-985024 > \text{RX-TX}$	T_c
RX-TX_0001	$-985024 \leq \text{RX-TX} < -984992$	T_c
RX-TX_0002	$-984992 \leq \text{RX-TX} < -984960$	T_c
...	...	...
RX-TX_30781	$-64 \leq \text{RX-TX} < -32$	T_c
RX-TX_30782	$-32 \leq \text{RX-TX} \leq 0$	T_c
RX-TX_30783	$0 < \text{RX-TX} \leq 32$	T_c
RX-TX_30784	$32 < \text{RX-TX} \leq 64$	T_c
RX-TX_30785	$64 < \text{RX-TX} \leq 96$	T_c
...	...	...
RX-TX_61564	$984992 < \text{RX-TX} \leq 985024$	T_c
RX-TX_61565	$985024 < \text{RX-TX}$	T_c

13.7.2 Measurement Accuracy Requirements

13.7.2.1 Introduction

This clause defines accuracy requirements for gNB Rx-Tx time difference measurement in FR1 and FR2. The requirements are applicable for gNB supporting gNB Rx-Tx time difference measurement for RTT-based PDC.

13.7.2.2 Requirements

The accuracy requirements for gNB Rx-Tx time difference measurement for RTT-based PDC shall be within $\pm(X+Y)$ T_c under the following conditions:

- AWGN propagation conditions.
- The measured signals are in the directions covered by RoAoA of OTA reference sensitivity requirements for gNB type 1-O and 2-O BS

where

- X is defined in Table 13.7.2.2-1 for gNB types 1-C, 1-H and 1-O and in Table 13.7.2.2-2 for gNB type 2-O.
- Y is declared by manufacturer and can be different for different gNB types 1-C, 1-H, 1-O and 2-O.

Note: The measurement accuracy requirements in Table 13.7.2.2-1 and Table 13.7.2.2-2 are defined under an assumption that gNB is not mandated to perform receive beam sweeping.

Table 13.7.2.2-1: gNB Rx-Tx time difference absolute accuracy in FR1 for gNB type 1-C, 1-H and 1-O

Accuracy	SRS $\hat{E}_s/I_{ot}$	SCS	SRS bandwidth range
Unit: T_c	Unit: dB	Unit: kHz	Unit: RB
122	$\geq +3$	15	$24 \leq BW \leq 40$
62			$44 \leq BW \leq 84$
32			$88 \leq BW \leq 168$
16			$176 \leq BW$
32		30	$48 \leq BW \leq 84$
17			$88 \leq BW \leq 168$
9			$176 \leq BW$
16		60	$48 \leq BW \leq 84$
9			$88 \leq BW$

Table 13.7.2.2-2: gNB Rx-Tx time difference absolute accuracy in FR2 for gNB type 2-O

Accuracy	SRS $\hat{E}_s/I_{ot}$	SCS	SRS bandwidth range
Unit: T_c	Unit: dB	Unit: kHz	Unit: RB
9	$\geq +3$	60	$132 \leq BW \leq 168$
8			$176 \leq BW$
16		120	$32 \leq BW \leq 40$
9			$44 \leq BW \leq 84$
8			$88 \leq BW$

Annex A (normative): Test Cases

A.1 Purpose of annex

A.2 Requirement classification for statistical testing

Requirements in this specification are either expressed as absolute requirements with a single value stating the requirement, or expressed as a success rate. There are no provisions for the statistical variations that will occur when the parameter is tested.

Annex A outlines the tests in more detail and lists the test parameters needed. The test will result in an outcome of a test variable value for the device under test (DUT) inside or outside the test limit. Overall, the probability of a "good" DUT being inside the test limit(s) and the probability of a "bad" DUT being outside the test limit(s) should be as high as possible. For this reason, when selecting the test variable and the test limit(s), the statistical nature of the test is accounted for.

The statistical nature depends on the type of requirement. Some have large statistical variations, while others are not statistical in nature at all. When testing a parameter with a statistical nature, a confidence level is set. This establishes the probability that a DUT passing the test actually meets the requirements and determines how many times a test has to be repeated and what the pass and fail criteria are. Those aspects are not covered by TS 38.133. The details of the tests on how many times to run it and how to establish confidence in the tests are described in TS 38.533 [5]. This Annex establishes the variable to be used in the test and whether it can be viewed as statistical in nature or not.

A.2.1 Types of requirements in TS 38.133

A.2.1.1 Time and delay requirements on UE higher layer actions

A very large part of the RRM requirements are delay requirements:

- In RRC_IDLE state mobility (clause A.6.1 and A.7.1) there is cell re-selection delay.
- In RRC_CONNECTED state mobility (clauses A.4.3, A.4.6, A.5.3, A.5.6, A.6.3, A.6.6, A.7.3 and A.7.6) there is handover delay, cell search delay and measurement reporting delay.
- In RRC Connection Control (clauses A.4.3.2, A.5.3.2, A.6.3.2 and A.7.3.2) there is RRC re-establishment delay.

All have in common that the UE is required to perform an action observable in higher layers (e.g. camp on the correct cell) within a certain time after a specific event (e.g. when a new strong pilot or reference signal appears). The delay time is statistical in nature for several reasons, among others that several of the measurements are performed by the UE in a fading radio environment.

The variations make a strict limit unsuitable for a test. Instead there is a condition set for a correct action by the UE, e.g. that the UE shall camp on the correct cell within X seconds. Then the rate of correct events is observed during repeated tests and a limit is set on the rate of correct events, usually 90% correct events are required. How the limit is applied in the test depends on the confidence required, further detailed are in TS 38.533 [5].

A.2.1.2 Measurements of power levels, relative powers and time

A very large number of requirements are on measurements that the UE performs:

- In RRC_CONNECTED state mobility (clauses A.4.3, A.5.3, A.6.3 and A.7.3) there are measurement reports.

- In Measurement Performance Requirements (clauses A.4.7, A.5.7, A.6.7 and A.7.7) there are requirements for all type of measurements.

The accuracy requirements on measurements are expressed in this specification as a fixed limit (e.g. +/-X dB), but the measurement error will have a distribution that is not easily confined in fixed limits. Assuming a Gaussian distribution of the error, the limits will have to be set at $\pm 3.29\sigma$ if the probability of failing a "good DUT" in a single test is to be kept at 0.1%. It is more reasonable to set the limit tighter and test the DUT by counting the rate of measurements that are within the limits, in a way similar to the requirements on delay.

A.2.1.3 Implementation requirements

A few requirements are strict actions the UE should take or capabilities the UE should have, without any allowance for deviations. These requirements are absolute and should be tested as such. Examples are:

- "Event triggered report rate" in RRC_CONNECTED state mobility (clauses A.4.3, A.4.6, A.5.3, A.5.6, A.6.3, A.6.6, A.7.3 and A.7.6)
- "Correct behaviour at time-out" in RRC connection control (clauses A.4.3.2, A.5.3.2, A.6.3.2 and A.7.3.2)

A.2.1.4 Physical layer timing requirements

There are requirements on Timing (clauses A.4.4, A.5.4, A.6.4 and A.7.4). There are both absolute and relative limits on timing accuracy depending upon the type of requirement. Examples are:

- Initial Transmit Timing (clauses A.4.4.1, A.5.4.1, A.6.4.1 and A.7.4.1) has an absolute limit on timing accuracy.
- Timing Advance (clauses A.4.4.2, A.5.4.2, A.6.4.2 and A.7.4.2) has a relative limit on timing accuracy.

A.2.1.5 Requirements under CCA

A few requirements include CCA failures in DL and or UL. Considering that the CCA model is of statistical nature, requirements that include CCA failures are always considered of statistical nature.

A.3 RRM test configurations

A.3.1 Reference measurement channels

A.3.1.1 PDSCH

A.3.1.1.1 FDD

Table A.3.1.1.1-1: PDSCH Reference Measurement Channels for SCS=15kHz

Parameter	Unit	Value						
Reference channel		SR.1.1 FDD						
Channel bandwidth	MHz	Defined in test case						
Number of transmitter antennas		1						
Allocated resource blocks for PDSCH ^{Note 1}		24						
Allocated slots per Radio Frame		10						

Radio frame containing SSB	slots	Note 5						
Radio frame not containing SSB	slots	10						
MCS index		4						
Modulation		QPSK						
Target Coding Rate		1/3						
Number of control symbols		2						
PDSCH mapping type		Type A						
Information Bit Payload								
For slots with RMSI ^{Note 2}	bits	1608						
For slots without RMSI	bits	1864						
Number of Code Blocks per slot		1						
Binary Channel Bits Per slot								
For slots with RMSI ^{Note 2, Note 4}	bits	5184						
For slots without RMSI ^{Note 6}	bits	6048						
Note 1: Allocated outside the SMTTC duration in time and in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block. Note 2: PDSCH is scheduled on the slots with RMSI. Note 3: If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in TS 38.213 [3]. Note 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2. Note 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10. Note 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1. Note 7: When DRX is configured, PDCCH can be scheduled both for downlink assignment and/or UL grant only during ([10]ms - drx-InactivityTimer) from timing when drx-onDurationTimer starts, unless otherwise specified in the test case								

A.3.1.1.2 TDD

Table A.3.1.1.2-1: PDSCH Reference Measurement Channels for SCS=15kHz

Parameter	Unit	Value						
Reference channel		SR.1.1 TDD	SR.1.2 TDD					
Channel bandwidth	MHz	Defined in test case	Defined in test case					
Number of transmitter antennas		1	1					
Allocated resource blocks for PDSCH ^{Note 1}		24	24					
Allocated slots per Radio Frame								
Radio frame containing SSB	slots	Note 5	Note 5					
Radio frame not containing SSB	slots	4	6					
MCS table		64QAM	64QAM					

MCS index		4	4					
Modulation		QPSK	QPSK					
Target Coding Rate		1/3	1/3					
Number of control symbols		2	2					
PDSCH mapping type		Type A	Type A					
Information Bit Payload								
For slots with RMSI ^{Note 2}	bits	1608	1608					
For slots without RMSI	bits	1864	1864					
For special slots	bits	N/A	1128					
Number of Code Blocks per slot		1	1					
Binary Channel Bits Per slot								
For slots with RMSI ^{Note 2, Note 4}	bits	5184	5184					
For slots without RMSI ^{Note 6}	bits	6048	6048					
For special slots ^{Note 6}	bits	-	3744					
Note 1: Allocated outside the SMTC duration in time and in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block. Note 2: PDSCH is scheduled on the slots with RMSI. Note 3: If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in TS 38.213 [3]. Note 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2. Note 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10. Note 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1. Note 7: When DRX is configured, PDCCH can be scheduled both for downlink assignment and/or UL grant only during ([10]ms - drx-InactivityTimer) from timing when drx-onDurationTimer starts, unless otherwise specified in the test case								

Table A.3.1.1.2-2: PDSCH Reference Measurement Channels for SCS=30kHz

Parameter	Unit	Value						
Reference channel		SR.2.1 TDD						
Channel bandwidth	MHz	Defined in test case						
Number of transmitter antennas		1						
Allocated resource blocks for PDSCH ^{Note 1}		24						
Allocated slots per Radio Frame								
Radio frame containing SSB	slots	Note 5						
Radio frame not containing SSB	slots	10						
MCS table		64QAM						
MCS index		4						
Modulation		QPSK						
Target Coding Rate		1/3						

Number of control symbols		2						
PDSCH mapping type		Type A						
Information Bit Payload								
For slots with RMSI ^{Note 2}	bits	1608						
For slots without RMSI	bits	1864						
Number of Code Blocks per slot		1						
Binary Channel Bits Per slot								
For slots with RMSI ^{Note 2, Note 4}	bits	6048						
Note 1: Allocated outside the SMTC duration in time and in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block. Note 2: PDSCH is scheduled on the slots with RMSI. Note 3: If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in TS 38.213 [3]. Note 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2. Note 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10. Note 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1. Note 7: When DRX is configured, PDCCH can be scheduled both for downlink assignment and/or UL grant only during ([10]ms - drx-InactivityTimer) from timing when drx-onDurationTimer starts, unless otherwise specified in the test case								

Table A.3.1.1.2-3: PDSCH Reference Measurement Channels for SCS=120kHz

Parameter	Unit	Value						
Reference channel		SR.3.1 TDD	SR.3.2 TDD	SR.3.3 TDD				
Channel bandwidth	MHz	100	100	100				
Number of transmitter antennas		1	1	1				
Allocated resource blocks for PDSCH		24 ^{Note 1}	24 ^{Note 7}	48 ^{Note 7}				
Allocated slots per Radio Frame								
Radio frame containing SSB	slots	Note 5	Note 5	Note 5				
Radio frame not containing SSB	slots	48	48	48				
MCS table		64QAM	64QAM	64QAM				
MCS index		4	4	4				
Modulation		QPSK	QPSK	QPSK				
Target Coding Rate		1/3	1/3	1/3				
Number of control symbols		2	2	2				
PDSCH mapping type		Type A	Type A	Type A				
Information Bit Payload								
For slots with RMSI	bits	1608	1608	3104				
For slots without RMSI	bits	1864	1864	3624				
Number of Code Blocks per slot		1	1	1				
Binary Channel Bits Per slot								

For slots with RMSI ^{Note 4}	bits	5184	5184	10368				
For slots without RMSI ^{Note 6}	bits	6048	6048	12096				
Note 1: Allocated in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block Note 2: Void Note 3: If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in TS 38.213 [3]. Note 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2. Note 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10. Note 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1. Note 7: Allocated in the same resource blocks as the CORESET. Note 8: When DRX is configured, PDSCH is scheduled only while <i>drx-onDurationTimer</i> is running, unless otherwise specified in the test case.								

A.3.1.2 CORESET for RMSI scheduling

A.3.1.2.1 FDD

Table A.3.1.2.1-1: RMSI CORESET Reference Channel for FDD with SCS=15KHz

Parameter	Unit	Value						
Reference channel		CR.1.1 FDD						
Channel bandwidth	MHz	Defined in test case						
Subcarrier spacing for RMSI CORESET	kHz	15						
Allocated resource blocks for RMSI CORESET ^{Note 7}		24						
Subcarrier spacing for SSB	kHz	15						
SSB and RMSI CORESET multiplexing configuration ^{Note 7}		Pattern 1						
Offset between SSB and RMSI CORESET ^{Note 3, 7}	RB	0 (Note8)						
Configuration of PDCCH monitoring occasions for RMSI CORESET ^{Note 4}		Index 4						
Number of transmitter antennas		1						
Duration of RMSI CORESET ^{Note 7}	symbols	2						
DCI Format ^{Note 1}		Note 2						
Aggregation level	CCE	8						
DMRS precoder granularity		6						
REG bundle size		6						
Mapping from REG to CCE		Distributed						
Cell ID		Note 5						
Payload (without CRC)	bits	Note 6						
Note 1: DCI formats are defined in TS 38.212. Note 2: DCI format shall depend upon the test configuration.								

Note 3:	The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block.
Note 4:	The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-11 in TS 38.213 [3].
Note 5:	Cell ID shall depend upon the test configuration.
Note 6:	Payload size shall depend upon the test configuration.
Note 7:	The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 0 in Table 13-1 in TS 38.213 [3]
Note 8:	Other values can be used to align with GSCN [13] as long as SSB does not overlap the RMC.

A.3.1.2.2 TDD

Table A.3.1.2.2-1: RMSI CORESET Reference Channel for TDD with SCS=15KHz

Parameter	Unit	Value						
Reference channel		CR.1.1 TDD						
Channel bandwidth	MHz	Defined in test case						
Subcarrier spacing	kHz	15						
Allocated resource blocks for RMSI CORESET ^{Note 7}		24						
SSB and RMSI CORESET multiplexing configuration ^{Note 7}		Pattern 1						
Offset between SSB and RMSI CORESET ^{Note 3, 7}	RB	0 (Note 8)						
Configuration of PDCCH monitoring occasions for RMSI CORESET ^{Note 4}		Index 4						
Number of transmitter antennas		1						
Duration of RMSI CORESET ^{Note 7}	symbols	2						
DCI Format ^{Note 1}		Note 2						
Aggregation level	CCE	8						
DMRS precoder granularity		6						
REG bundle size		6						
Mapping from REG to CCE		Distributed						
Cell ID		Note 5						
Payload (without CRC)	bits	Note 6						
Note 1: DCI formats are defined in TS 38.212. Note 2: DCI format shall depend upon the test configuration. Note 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block. Note 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-11 in TS 38.213 [3]. Note 5: Cell ID shall depend upon the test configuration. Note 6: Payload size shall depend upon the test configuration. Note 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 0 in Table 13-1 in TS 38.213 [3]. Note 8: Other values can be used to align with GSCN [13] as long as SSB does not overlap the RMC.								

Table A.3.1.2.2-2: RMSI CORESET Reference Channel for TDD with SCS=30KHz

Parameter	Unit	Value						
Reference channel		CR.2.1 TDD						
Channel bandwidth	MHz	Defined in test case						
Subcarrier spacing	kHz	30						
Allocated resource blocks for RMSI CORESET ^{Note 7}		24						
SSB and RMSI CORESET multiplexing configuration ^{Note 7}		Pattern 1						
Offset between SSB and RMSI CORESET ^{Note 3, 7}	RB	0 (Note 8)						
Configuration of PDCCH monitoring occasions for RMSI CORESET ^{Note 4}		Index 4						
Number of transmitter antennas		1						
Duration of RMSI CORESET ^{Note 7}	symbols	2						
DCI Format ^{Note 1}		Note 2						
Aggregation level	CCE	8						
DMRS precoder granularity		6						
REG bundle size		6						
Mapping from REG to CCE		Distributed						
Cell ID		Note 5						
Payload (without CRC)	bits	Note 6						
Note 1: DCI formats are defined in TS 38.212. Note 2: DCI format shall depend upon the test configuration. Note 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block. Note 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-11 in TS 38.213 [3]. Note 5: Cell ID shall depend upon the test configuration. Note 6: Payload size shall depend upon the test configuration. Note 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 0 in Table 13-6 in TS 38.213 [3]. Note 8: Other values can be used to align with GSCN [13] as long as SSB does not overlap the RMC.								

Table A.3.1.2.2-3: RMSI CORESET Reference Channel for TDD with SCS=120KHz

Parameter	Unit	Value						
Reference channel		CR.3.1 TDD	CR.3.2 TDD					
Channel bandwidth	MHz	100	100					
Subcarrier spacing	kHz	120	120					
Allocated resource blocks for RMSI CORESET		24 ^{Note 7}	48 ^{Note 9}					
SSB and RMSI CORESET multiplexing configuration		Pattern 1 ^{Note 7}	Pattern 1 ^{Note 9}					
Offset between SSB and RMSI CORESET ^{Note 3}	RB	0 (Note 8) ^{Note 7}	0 (Note 8) ^{Note 9}					

Configuration of PDCCH monitoring occasions for RMSI CORESET ^{Note 4}		Index 4	Index 4					
Number of transmitter antennas		1	1					
Duration of RMSI CORESET	symbols	2 ^{Note 7}	2 ^{Note 9}					
DCI Format ^{Note 1}		Note 2	Note 2					
Aggregation level	CCE	8	8					
DMRS precoder granularity		6	6					
REG bundle size		6	6					
Mapping from REG to CCE		Distributed	Distributed					
Cell ID		Note 5	Note 5					
Payload (without CRC)	bits	Note 6	Note 6					
Note 1: DCI formats are defined in TS 38.212. Note 2: DCI format shall depend upon the test configuration. Note 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block. Note 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-12 in TS 38.213 [3]. Note 5: Cell ID shall depend upon the test configuration. Note 6: Payload size shall depend upon the test configuration. Note 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 0 in Table 13-8 in TS 38.213 [3]. Note 8: Other values can be used to align with GSCN [13] as long as SSB does not overlap the RMC. Note 9: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 2 in Table 13-10 in TS 38.213 [3].								

A.3.1.3 CORESET for RMC scheduling

A.3.1.3.1 FDD

Table A.3.1.3.1-1: Control Channel RMC for FDD with SCS=15KHz

Parameter	Unit	Value						
Reference channel		CCR.1.1 FDD	CCR.1.2 FDD	CCR.1.3 FDD	CCR.1.4 FDD	CCR.1.5 FDD		
Channel bandwidth	MHz	Defined in test case	Defined in test case	Defined in test case	Defined in test case	10		
Subcarrier spacing	kHz	15	15	15	15	15		
Allocated resource blocks for CORESET ^{Note 3}		24	18	24	18	24		
Number of transmitter antennas		1	1	1	1	1		
Duration of CORESET	symbols	2	2	2	2	2		
monitoringSymbolsWithinSlot		1000000 0000000	1000000 0000000	1000000 0000000	1000000 0000000	0010000 0000000		
REG bundle size		6	6	6	6	6		
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size		
CCE to REG mapping		Interleaved	Interleaved	Interleaved	Interleaved	Interleaved		
Interleave n _{shift}		0	0	0	0	0		

Interleave size		2	2	2	2	2		
Beamforming Pre-Coder		N/A	N/A	N/A	N/A	N/A		
Aggregation level	CCE	4	2	8	4	4		
DCI formats		Note 1	Note 1	Note 1	Note 1	Note 1		
Payload size (without CRC)	bits	Note 2	Note 2	Note 2	Note 2	Note 2		
Note 1: DCI format shall depend upon the test configuration.								
Note 2: Payload size shall depend upon the test configuration								
Note 3: Allocated in the resource blocks where the associated RMC is scheduled.								

Table A.3.1.3.1-2: Void

Table A.3.1.3.1-3: Control Channel RMC for FDD with SCS=15KHz

Parameter	Unit	Value					
Reference channel		CCR.3.1 FDD	CCR.3.2 FDD				
Channel bandwidth	MHz	Defined in test case	Defined in test case				
Subcarrier spacing	kHz	15	15				
Allocated resource blocks for CORESET ^{Note 3}		48	48				
Number of transmitter antennas		1	1				
Duration of CORESET	symbols	2	2				
monitoringSymbolsWithinSlot		1000000 0000000	1000000 0000000				
REG bundle size		6	6				
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size				
CCE to REG mapping		Interleaved	Interleaved				
Interleave n _{shift}		0	0				
Interleave size		2	2				
Beamforming Pre-Coder		N/A	N/A				
Aggregation level	CCE	8	16				
DCI formats		Note 1	Note 1				
Payload size (without CRC)	bits	Note 2	Note 2				
Note 1: DCI format shall depend upon the test configuration.							
Note 2: Payload size shall depend upon the test configuration							
Note 3: Allocated in the resource blocks where the associated RMC is scheduled.							

A.3.1.3.2 TDD

Table A.3.1.3.2-1: Control Channel RMC for TDD with SCS=15KHz

Parameter	Unit	Value					
Reference channel		CCR.1.1 TDD	CCR.1.2 TDD	CCR.1.3 TDD	CCR.1.4 TDD	CCR.1.5 TDD	
Channel bandwidth	MHz	Defined in test case	Defined in test case	Defined in test case	Defined in test case	10	
Subcarrier spacing	kHz	15	15	15	15	15	
Allocated resource blocks for CORESET ^{Note 3}		24	18	24	18	18	
Number of transmitter antennas		1	1	1	1	1	

Duration of CORESET	symbols	2	2	2	2	2		
monitoringSymbolsWithinSlot		1000000 0000000	1000000 0000000	1000000 0000000	1000000 0000000	0010000 0000000		
REG bundle size		6	6	6	6	6		
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size		
CCE to REG mapping		Interleave d	Interleave d	Interleave d	Interleave d	Interleave d		
Interleave n _{shift}		0	0	0	0	0		
Interleave size		2	2	2	2	2		
Beamforming Pre-Coder		N/A	N/A	N/A	N/A	N/A		
Aggregation level	CCE	4	2	8	4	4		
DCI formats		Note 1	Note 1	Note 1	Note 1	Note 1		
Payload size (without CRC)	bits	Note 2	Note 2	Note 2	Note 2	Note 2		
Note 1: DCI format shall depend upon the test configuration. Note 2: Payload size shall depend upon the test configuration Note 3: Allocated in the resource blocks where the associated RMC is scheduled.								

Table A.3.1.3.2-2: Control Channel RMC for TDD with SCS=30KHz

Parameter	Unit	Value						
Reference channel		CCR.2.1 TDD	CCR.2.2 TDD	CCR.2.3 TDD	CCR.2.4 TDD			
Channel bandwidth	MHz	Defined in test case	Defined in test case	Defined in test case	Defined in test case			
Subcarrier spacing	kHz	30	30	30	30			
Allocated resource blocks for CORESET ^{Note 3}		24	24	18	18			
Number of transmitter antennas		1	1	1	1			
Duration of CORESET	symbols	2	2	2	2			
REG bundle size		6	6	6	6			
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size			
CCE to REG mapping		Interleaved	Interleaved	Interleaved	Interleaved			
Interleave n _{shift}		0	0	0	0			
Interleave size		2	2	2	2			
Beamforming Pre-Coder		N/A	N/A	N/A	N/A			
Aggregation level	CCE	4	8	4	2			
DCI formats		Note 1	Note 1	Note 1	Note 1			
Payload size (without CRC)	bits	Note 2	Note 2	Note 2	Note 2			
Note 1: DCI format shall depend upon the test configuration. Note 2: Payload size shall depend upon the test configuration. Note 3: Allocated in the same resource blocks where the associated RMC is scheduled.								

Table A.3.1.3.2-3: Void

Table A.3.1.3.2-4: Control Channel RMC for TDD with SCS=15KHz

Parameter	Unit	Value				
Reference channel		CCR.4.1 TDD	CCR.4.2 TDD			
Channel bandwidth	MHz	Defined in test case	Defined in test case			
Subcarrier spacing	kHz	15	15			
Allocated resource blocks for CORESET ^{Note 3}		48	48			
Number of transmitter antennas		1	1			
Duration of CORESET	symbols	2	2			
monitoringSymbolsWithinSlot		1000000 0000000	1000000 0000000			
REG bundle size		6	6			
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size			
CCE to REG mapping		Interleaved	Interleaved			
Interleave n_shift		0	0			
Interleave size		2	2			
Beamforming Pre-Coder		N/A	N/A			
Aggregation level	CCE	8	16			
DCI formats		Note 1	Note 1			
Payload size (without CRC)	bits	Note 2	Note 2			
Note 1: DCI format shall depend upon the test configuration.						
Note 2: Payload size shall depend upon the test configuration						
Note 3: Allocated in the resource blocks where the associated RMC is scheduled.						

Table A.3.1.3.2-5: Control Channel RMC for TDD with SCS=30KHz

Parameter	Unit	Value				
Reference channel		CCR.5.1 TDD	CCR.5.2 TDD			
Channel bandwidth	MHz	Defined in test case	Defined in test case			
Subcarrier spacing	kHz	30	30			
Allocated resource blocks for CORESET ^{Note 3}		48	48			
Number of transmitter antennas		1	1			
Duration of CORESET	symbols	2	2			
REG bundle size		6	6			
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size			

CCE to REG mapping		Interleaved	Interleaved			
Interleave n_shift		0	0			
Interleave size		2	2			
Beamforming Pre-Coder		N/A	N/A			
Aggregation level	CCE	8	16			
DCI formats		Note 1	Note 1			
Payload size (without CRC)	bits	Note 2	Note 2			
Note 1: DCI format shall depend upon the test configuration.						
Note 2: Payload size shall depend upon the test configuration.						
Note 3: Allocated in the same resource blocks where the associated RMC is scheduled.						

Table A.3.1.3.2-3: Control Channel RMC for TDD with SCS=120KHz

Parameter	Unit	Value						
Reference channel		CCR.3.1 TDD	CCR.3.2 TDD	CCR.3.3 TDD	CCR.3.4 TDD	CCR.3.5 TDD	CCR.3.6 TDD	CCR.3.7 TDD
Channel bandwidth	MHz	100	100	100	100	100	100	100
Subcarrier spacing	kHz	120	120	120	120	120	120	120
Allocated resource blocks for CORESET ^{Note 3}		24	24	24	24	24	24	48
Number of transmitter antennas		1	1	1	1	1	1	1
monitoringSlotPeriodicityAndOffset ^{Note 4}		sl1600	sl1600	sl16080	sl1600	sl1600	sl16080	sl1600
monitoringSymbolsWithinSlot		11000000000000	00110000000000	11000000000000	10000000000000	00100000000000	10000000000000	11000000000000
Duration of CORESET	slot	1	1	1	2	2	2	1
REG bundle size		6	6	6	6	6	6	6
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size	Same as REG bundle size
CCE to REG mapping		Interleaved	Interleaved	Interleaved	Interleaved	Interleaved	Interleaved	Interleaved
Interleave n_shift		0	0	0	0	0	0	0
Interleave size		2	2	2	2	2	2	2
Beamforming Pre-Coder		N/A	N/A	N/A	N/A	N/A	N/A	N/A
Aggregation level	CCE	4	4	4	8	8	8	4
DCI formats		Note 1	Note 1	Note 1	Note 1	Note 1	Note 1	Note 1
Payload size (without CRC)	bits	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2	Note 2
Note 1: DCI format shall depend upon the test configuration.								
Note 2: Payload size shall depend upon the test configuration.								
Note 3: Allocated in the same resource blocks where the associated PDSCH RMC is scheduled.								
Note 4: <i>monitoringSlotPeriodicityAndOffset</i> is set to "sl1 0" if it is specifically stated that cell(s) configured with one of the control channel RMCs above shall transmit PDCCHs continuously.								

A.3.1.4 TDD UL/DL configuration

Table A.3.1.4-1: TDD UL/DL configuration for SCS=15kHz

Parameter	Unit	Value		
Reference channel		TDDConf.1.1	TDDConf.1.2	
<i>referenceSubcarrierSpacing</i>	kHz	15	15	
TDD UL/DL pattern 1 ^{Note 2}		'DSUU' S='10DL:2GP:2UL'	'DSUU' S=' 6DL: 2GP: 6UL'	
<i>dl-UL-TransmissionPeriodicity</i>	ms	4	4	
<i>nrofDownlinkSlots</i>		1	1	
<i>nrofDownlinkSymbols</i>		10	6	
<i>nrofUplinkSlot</i>		2	2	
<i>nrofUplinkSymbols</i>		2	6	
TDD UL/DL pattern 2 ^{Note 2}		'D'	'D'	
<i>dl-UL-TransmissionPeriodicity</i>	ms	1	1	
<i>nrofDownlinkSlots</i>		1	1	
<i>nrofDownlinkSymbols</i>		0	0	
<i>nrofUplinkSlot</i>		0	0	
<i>nrofUplinkSymbols</i>		0	0	
Note 1: As specified in TS 38.213 [3] and TS 38.331 [2].				
Note 2: For information				

Table A.3.1.4-2: TDD UL/DL configuration for SCS=30kHz

Parameter	Unit	Value		
Reference channel		TDDConf.2.1	TDDConf.2.2	TDDConf.2.3
<i>referenceSubcarrierSpacing</i>	kHz	30	30	30
TDD UL/DL pattern 1 ^{Note 2}		'3D1S4U' S='6DL:4GP:4UL'	'1D1S2U' S='11DL: 1GP:2UL'	'3D1S4U' S='4DL:4GP:6UL'
<i>dl-UL-TransmissionPeriodicity</i>	ms	4	2	4
<i>nrofDownlinkSlots</i>		3	1	3
<i>nrofDownlinkSymbols</i>		6	11	4
<i>nrofUplinkSlot</i>		4	2	4
<i>nrofUplinkSymbols</i>		4	2	6
TDD UL/DL pattern 2 ^{Note 2}		'DD'	Not configured	'DD'
<i>dl-UL-TransmissionPeriodicity</i>	ms	1	Not configured	1
<i>nrofDownlinkSlots</i>		2	Not configured	2
<i>nrofDownlinkSymbols</i>		0	Not configured	0
<i>nrofUplinkSlot</i>		0	Not configured	0
<i>nrofUplinkSymbols</i>		0	Not configured	0
Note 1: As specified in TS 38.213 [3] and TS 38.331 [2].				
Note 2: For information				

Table A.3.1.4-3: TDD UL/DL configuration for SCS=120kHz

Parameter	Unit	Value		
Reference channel		TDDConf.3.1	TDDConf.3.2	
<i>referenceSubcarrierSpacing</i>	kHz	120	120	
TDD UL/DL pattern 1 ^{Note 2}		'DDDSU' S='10DL:2GP:2UL'	'DDDSU' S=' 6DL: 2GP: 6UL'	

<i>dl-UL-TransmissionPeriodicity</i>	ms	0.625	0.625	
<i>nrofDownlinkSlots</i>		3	3	
<i>nrofDownlinkSymbols</i>		10	6	
<i>nrofUplinkSlot</i>		1	1	
<i>nrofUplinkSymbols</i>		2	6	
TDD UL/DL pattern 2 ^{Note 2}		Not configured	Not configured	
<i>dl-UL-TransmissionPeriodicity</i>	ms	Not configured	Not configured	
<i>nrofDownlinkSlots</i>		Not configured	Not configured	
<i>nrofDownlinkSymbols</i>		Not configured	Not configured	
<i>nrofUplinkSlot</i>		Not configured	Not configured	
<i>nrofUplinkSymbols</i>		Not configured	Not configured	
Note 1: As specified in TS 38.213 [3] and TS 38.331 [2].				
Note 2: For information				

A.3.1A Reference measurement channels under CCA

A.3.1A.1 PDSCH

A.3.1A.1.1 TDD

Table A.3.1A.1.1-1: PDSCH Reference Measurement Channels for SCS=30kHz

Parameter	Unit	Value						
Reference channel		SR.1.1 CCA						
Channel bandwidth	MHz	40						
Number of transmitter antennas		1						
Allocated resource blocks for PDSCH ^{Note 1}		24						
Allocated slots per Radio Frame								
Radio frame containing SSB	slots	Note 5						
Radio frame not containing SSB	slots	Note 7						
MCS table		64QAM						
MCS index		4						
Modulation		QPSK						
Target Coding Rate		1/3						
Number of control symbols		2						
PDSCH mapping type		Type A						
Information Bit Payload								
For slots with RMSI ^{Note 2}	bits	1608						
For slots without RMSI	bits	1864						
Number of Code Blocks per slot		1						
Binary Channel Bits Per slot								
For slots with RMSI ^{Note 2, Note 4}	bits	5184						
For slots without RMSI ^{Note 6}	bits	6048						

- Note 1: Allocated outside the discovery burst transmission window in time and in resource blocks which do not overlap with the resource blocks allocated for SS/PBCH block.
- Note 2: PDSCH is scheduled on the slots with RMSI.
- Note 3: If necessary the information bit payload size can be adjusted to facilitate the test implementation. The payload sizes are defined in TS 38.213 [3].
- Note 4: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 2.
- Note 5: PDSCH is not scheduled in slots containing SSB according to the SSB configuration used in the test. SSB configurations are defined in clause A.3.10A.
- Note 6: Derived based on the PDSCH DMRS assumption: dmrs-TypeA-Position=2, dmrs-Type=1, dmrs-AdditionalPositions=2, maxLength=1, Antenna port index: 1000, and Number of PDSCH DMRS CDM group(s) without data: 1.
- Note 7: PDSCH is transmitted during the RMC burst as specified in A.3.1A.5.

A.3.1A.2 CORESET for RMSI scheduling

A.3.1A.2.1 TDD

Table A.3.1A.2.1-1: RMSI CORESET Reference Channel for SCS=30KHz

Parameter	Unit	Value						
Reference channel		CR.1.1 CCA						
Channel bandwidth	MHz	40						
Subcarrier spacing	kHz	30						
Allocated resource blocks for RMSI CORESET ^{Note 7}		48						
SSB and RMSI CORESET multiplexing configuration ^{Note 7}		Pattern 1						
Offset between SSB and RMSI CORESET ^{Note 3, 7}	RB	0 (Note 8)						
Configuration of PDCCH monitoring occasions for RMSI CORESET ^{Note 4}		Index 0						
Number of transmitter antennas		1						
Duration of RMSI CORESET ^{Note 7}	symbols	2						
DCI Format ^{Note 1}		Note 2						
Aggregation level	CCE	8						
DMRS precoder granularity		6						
REG bundle size		6						
Mapping from REG to CCE		Distributed						
Cell ID		Note 5						
Payload (without CRC)	bits	Note 6						
Note 1: DCI formats are defined in TS 38.212. Note 2: DCI format shall depend upon the test configuration. Note 3: The offset is defined with respect to the subcarrier spacing of the CORESET from the smallest RB index of RMSI CORESET to the smallest RB index of the common RB overlapping with the first RB of the SS/PBCH block. Note 4: The configuration of PDCCH monitoring occasions for RMSI CORESET is defined in Table 13-11 in TS 38.213 [3]. Note 5: Cell ID shall depend upon the test configuration. Note 6: Payload size shall depend upon the test configuration.								

- Note 7: The configuration of set of resource blocks and slot symbols of control resource set for Type0-PDCCH search space corresponds to index 4 in Table 13-4A in TS 38.213 [3].
- Note 8: Other values can be used to align with GSCN [13] as long as SSB does not overlap the RMC.

A.3.1A.3 CORESET for RMC scheduling

A.3.1A.3.1 TDD

Table A.3.1A.3.1-1: Control Channel RMC with SCS=30KHz

Parameter	Unit	Value						
Reference channel		CCR.1.1 CCA	CCR.1.2 CCA	CCR.1.3 CCA				
Channel bandwidth	MHz	40	40	40				
Subcarrier spacing	kHz	30	30	30				
Allocated resource blocks for CORESET Note 3		24	24	18				
Number of transmitter antennas		1	1	1				
Duration of CORESET	symbols	2	2	2				
REG bundle size		6	6	6				
DMRS precoder granularity		Same as REG bundle size	Same as REG bundle size	Same as REG bundle size				
CCE to REG mapping		Interleaved	Interleaved	Interleaved				
Interleave n _{shift}		0	0	0				
Interleave size		2	2	2				
Beamforming Pre-Coder		N/A	N/A	N/A				
Aggregation level	CCE	4	8	4				
DCI formats		Note 1	Note 1	Note 1				
Payload size (without CRC)	bits	Note 2	Note 2	Note 2				
Note 1: DCI format shall depend upon the test configuration. Note 2: Payload size shall depend upon the test configuration. Note 3: Allocated in the same resource blocks where the associated RMC is scheduled.								

A.3.1A.4 TDD UL/DL configuration

Table A.3.1A.4-1: TDD UL/DL configuration for SCS=30kHz

Parameter	Unit	Value		
Reference channel		TDDConf.1.1 CCA		
<i>referenceSubcarrierSpacing</i>	kHz	N/A		
TDD UL/DL pattern 1 ^{Note 2, Note 3}		'3D1S4U' S='6DL:4GP:4UL'		
<i>dl-UL-TransmissionPeriodicity</i>	ms	N/A		
<i>nrofDownlinkSlots</i>		N/A		
<i>nrofDownlinkSymbols</i>		N/A		
<i>nrofUplinkSlot</i>		N/A		
<i>nrofUplinkSymbols</i>		N/A		
TDD UL/DL pattern 2 ^{Note 2, Note 3}		'DD'		
<i>dl-UL-TransmissionPeriodicity</i>	ms	N/A		

<i>nrofDownlinkSlots</i>		N/A		
<i>nrofDownlinkSymbols</i>		N/A		
<i>nrofUplinkSlot</i>		N/A		
<i>nrofUplinkSymbols</i>		N/A		
Note 1: As specified in TS 38.213 [3] and TS 38.331 [2].				
Note 2: Do not configure <i>tdt-UL-DL-ConfigurationCommon</i> using RRC configuration				
Note 3: The UE will be scheduled via DCI according to the TDD pattern defined in the table.				

A.3.1A.5 RMC burst transmission model

RMC not conveying RMSI is scheduled during the RMC burst. The length of the transmission burst in slots is defined as N. The burst transmission format is determined according to the steps below:

1. Select N randomly from a given set of the number of slots $S_1 = \{1,3,5\}$ with equal probability as the total length of RMC burst transmission format.
2. A uniform random variable from 0 to 1 is generated. If the random variable is less than P_{CCA_DL} , a burst of N fully occupied slots is transmitted. Otherwise, the RMC burst transmission is muted and the muting duration is the same as the number N of slots for determined burst format.

RMC burst transmission is scheduled outside discovery burst transmission window. If transmission occurred in the previous slot, transmission is muted for a duration of one slot. Additionally, if the start time of the candidate RMC burst transmission is within 5 slots of the start of the discovery burst transmission window, RMC transmission is not performed.

A.3.2 OFDMA channel noise generator (OCNG)

A.3.2.1 Generic OFDMA Channel Noise Generator (OCNG)

The OCNG pattern is used in a test for modelling allocations of unused resources in the channel bandwidth to virtual UEs (which are not under test). The OCNG pattern comprises PDCCH and PDSCH transmissions to the virtual UEs. For the cells operating under CCA, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during the slots for which CCA attempt is unsuccessful or during DBT windows.

A.3.2.1.1 OCNG pattern 1: Generic OCNG pattern for all unused REs

Table A.3.2.1.1-1: OP.1: Generic OCNG pattern for all unused REs

OCNG Parameters	Control Region	Data Region
Resource allocation	Unused REs (Note 1)	Unused REs (Note 2)
Channel	PDCCH	PDSCH
Contents	Virtual UE IDs	Uncorrelated pseudo random QPSK modulated data
Antenna transmission scheme	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Subcarrier spacing	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Aggregation level	Same as used in PDCCH RMC	N/A
Code rate	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Transmit Power	Same as used in PDCCH RMC	Same as used in PDSCH RMC
CP length	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Note 1: REs not used in the active CORESETs where PDCCH is scheduled for the UE under test.		
Note 2: REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the channel bandwidth of the cell, confined to $BW_{occupied}$ where specified in the test case.		

A.3.2.1.2 OCNG pattern 2: Generic OCNG pattern for all unused REs for 2AoA setup

Table A.3.2.1.2-2: OP.2: Generic OCNG pattern for all unused REs for 2AoA setup

OCNG Parameters	Control Region	Data Region
Probe	Transmitting the serving beam	
Resource allocation	Unused REs (Note 1) in the symbols where SSB/CSI-RS are not transmitted from both the serving beam probe and non-serving beam probe.	Unused REs (Note 2) in the symbols where SSB/CSI-RS are not transmitted from both the serving beam probe and non-serving beam probe.
Channel	PDCCH	PDSCH
Contents	Virtual UE IDs	Uncorrelated pseudo random QPSK modulated data
Antenna transmission scheme	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Subcarrier spacing	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Aggregation level	Same as used in PDCCH RMC	N/A
Code rate	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Transmit Power	Same as used in PDCCH RMC	Same as used in PDSCH RMC
CP length	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Note 1:	REs not used in the active CORESETs where PDCCH is scheduled for the UE under test.	
Note 2:	REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the channel bandwidth of the cell, confined to $BW_{occupied}$ where specified in the test case.	
Note 3:	No OCNG is transmitted from the probe transmitting non-serving beam.	

A.3.2.1.3 OCNG pattern 3: Generic OCNG pattern for unused REs in the same bandwidth as CORESET

Table A.3.2.1.3-1: OP.3: Generic OCNG pattern for unused REs in the same BW as CORESET

OCNG Parameters	Control Region	Data Region
Resource allocation	Unused REs (Note 1)	Unused REs (Note 2)
Channel	PDCCH	PDSCH
Contents	Virtual UE IDs	Uncorrelated pseudo random QPSK modulated data
Antenna transmission scheme	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Subcarrier spacing	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Aggregation level	Same as used in PDCCH RMC	N/A
Code rate	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Transmit Power	Same as used in PDCCH RMC	Same as used in PDSCH RMC
CP length	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Note 1:	REs not used in the active CORESETs where PDCCH is scheduled for the UE under test. REs for OCNG shall not be allocated outside the allocated bandwidth of the CORESET of the serving cell.	
Note 2:	REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the allocated bandwidth of the CORESET of the serving cell. REs for OCNG shall not be allocated outside the allocated bandwidth of the CORESET of the serving cell.	

A.3.2.1.4 OCNG pattern 4: Generic OCNG pattern for all unused REs outside SSB slot(s)

Table A.3.2.1.4-1: OP.4: Generic OCNG pattern for all unused REs outside SSB slot(s)

OCNG Parameters	Control Region	Data Region
-----------------	----------------	-------------

Resource allocation	Unused REs (Note 1)	Unused REs (Note 2)
Channel	PDCCH	PDSCH
Contents	Virtual UE IDs	Uncorrelated pseudo random QPSK modulated data
Antenna transmission scheme	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Subcarrier spacing	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Aggregation level	Same as used in PDCCH RMC	N/A
Code rate	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Transmit Power	Same as used in PDCCH RMC	Same as used in PDSCH RMC
CP length	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Note 1: REs not used in the active CORESETs where PDCCH is scheduled for the UE under test. REs for OCNG shall not be allocated in the slot(s) containing SSB of the respective cell. Note 2: REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the channel bandwidth of the cell. REs for OCNG shall not be allocated in the slot(s) containing SSB of the respective cell.		

A.3.2.1.5 OCNG pattern 5: Generic OCNG pattern for unused REs in the same bandwidth as CORESET for 2AoA setup

Table A.3.2.1.5-1: OP.5: Generic OCNG pattern for unused REs in the same BW as CORESET for 2AoA setup

OCNG Parameters	Control Region	Data Region
Probe	Transmitting the serving beam	
Resource allocation	Unused REs (Note 1) in the symbols where SSB/CSI-RS are not transmitted from both the serving beam probe and non-serving beam probe.	Unused REs (Note 2) in the symbols where SSB/CSI-RS are not transmitted from both the serving beam probe and non-serving beam probe.
Channel	PDCCH	PDSCH
Contents	Virtual UE IDs	Uncorrelated pseudo random QPSK modulated data
Antenna transmission scheme	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Subcarrier spacing	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Aggregation level	Same as used in PDCCH RMC	N/A
Code rate	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Transmit Power	Same as used in PDCCH RMC	Same as used in PDSCH RMC
CP length	Same as used in PDCCH RMC	Same as used in PDSCH RMC
Note 1: REs not used in the active CORESETs where PDCCH is scheduled for the UE under test. REs for OCNG shall not be allocated outside the allocated bandwidth of the CORESET of the serving cell. Note 2: REs not allocated to any physical channels, CORESET, SSB or any other reference signal within the allocated bandwidth of the CORESET of the serving cell. REs for OCNG shall not be allocated outside the allocated bandwidth of the CORESET of the serving cell. Note 3: No OCNG is transmitted from the probe transmitting non-serving beam.		

A.3.2.2 Void

A.3.3 Reference DRX configurations

A.3.3.1 DRX Configuration 1: DRX cycle = 40 ms and TAT = 500 ms

Table A.3.3.1-1: DRX.1: DRX cycle = 40 ms and time alignment timer (TAT) = 500 ms

Field	Value
drx-onDurationTimer	1 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	40 ms
shortDRX	disable
TimeAlignmentTimer	500 ms
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.3.2 DRX Configuration 2: DRX cycle = 640 ms and TAT = 500 ms

Table A.3.3.2-1: DRX.2: DRX cycle = 640 ms and time alignment timer (TAT) = 500 ms

Field	Value
drx-onDurationTimer	1 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	640 ms
shortDRX	disable
TimeAlignmentTimer	500 ms
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.3.3 DRX Configuration 3: DRX cycle = 40 ms and TAT = Infinity

Table A.3.3.3-1: DRX.3: DRX cycle = 40 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	6 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	40 ms
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.3.4 DRX Configuration 4: DRX cycle = 160 ms and TAT = Infinity

Table A.3.3.4-1: DRX.4: DRX cycle = 160 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	psf2
drx-InactivityTimer	psf2
drx-RetransmissionTimer	Psf16
longDRX-CycleStartOffset	sf160, 0
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for E-UTRA serving cell. For further information see clause 6.3.2 in TS 36.331 [16].	

A.3.3.5 DRX Configuration 5: DRX cycle = 320 ms and TAT = Infinity

Table A.3.3.5-1: DRX.5: DRX cycle = 320 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	psf6
drx-InactivityTimer	psf1920
drx-RetransmissionTimer	psf16
longDRX-CycleStartOffset	sf320, 0
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for E-UTRA serving cell. For further information see clause 6.3.2 in TS 36.331 [16].	

A.3.3.6 DRX Configuration 6: DRX cycle = 320 ms and TAT = 500 ms

Table A.3.3.6-1: DRX.6: DRX cycle = 320 ms and time alignment timer (TAT) = 500 ms

Field	Value
drx-onDurationTimer	1 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	320 ms
shortDRX	disable
TimeAlignmentTimer	500 ms
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.3.7 DRX Configuration 7: DRX cycle = 640 ms and TAT = Infinity

Table A.3.3.7-1: DRX.7: DRX cycle = 640 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	6 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot

drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	640 ms
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.3.8 DRX Configuration 8: DRX cycle = 320 ms and TAT = Infinity

Table A.3.3.8-1: DRX.8: DRX cycle = 320 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	6 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	320 ms
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.3.9 DRX Configuration 9: DRX cycle = 40 ms and TAT = 500 ms

Table A.3.3.9-1: DRX.9: DRX cycle = 40 ms and time alignment timer (TAT) = 500 ms

Field	Value
drx-onDurationTimer	psf2
drx-InactivityTimer	psf2
drx-RetransmissionTimer	psf16
longDRX-CycleStartOffset	sf40, 0
shortDRX	disable
TimeAlignmentTimer	500 ms
Note: This DRX configuration is applicable for E-UTRA serving cell. For further information see clause 6.3.2 in TS 36.331 [16].	

A.3.3.10 DRX Configuration 10: DRX cycle = 640 ms and TAT = 500 ms

Table A.3.3.10-1: DRX.10: DRX cycle = 640 ms and time alignment timer (TAT) = 500 ms

Field	Value
drx-onDurationTimer	psf6
drx-InactivityTimer	psf2
drx-RetransmissionTimer	psf16
longDRX-CycleStartOffset	sf640, 0
shortDRX	disable
TimeAlignmentTimer	500 ms
Note: This DRX configuration is applicable for E-UTRA serving cell. For further information see clause 6.3.2 in TS 36.331 [16].	

A.3.3.11 DRX Configuration 11: DRX cycle = 20 ms and TAT = Infinity

Table A.3.3.11-1: DRX.11: DRX cycle = 20 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	6 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	20 ms
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.3.12 DRX Configuration 12: DRX cycle = 640 ms and TAT = Infinity

Table A.3.3.12-1: DRX.12: DRX cycle = 640 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	psf6
drx-InactivityTimer	psf2
drx-RetransmissionTimer	psf16
longDRX-CycleStartOffset	sf640, 0
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for E-UTRA serving cell. For further information see clause 6.3.2 in TS 36.331 [16].	

A.3.3.13 DRX Configuration X1: DRX cycle = 80 ms and TAT = Infinity

Table A.3.3.13-1: DRX.X1: DRX cycle = 80 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	6 ms
drx-InactivityTimer	1 ms
drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	80 ms
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.3.14 DRX Configuration 14: DRX cycle = 160 ms and TAT = Infinity

Table A.3.3.13-1: DRX.14: DRX cycle = 160 ms and time alignment timer (TAT) = Infinity

Field	Value
drx-onDurationTimer	6 ms
drx-InactivityTimer	1 ms

drx-RetransmissionTimerDL	1 slot
drx-RetransmissionTimerUL	1 slot
drx-LongCycleStartOffset	160 ms
shortDRX	disable
TimeAlignmentTimer	Infinity
Note: This DRX configuration is applicable for NR serving cell. The DRX cycle and time alignment timer parameters are specified in clause 6.3.2 in TS 38.331 [2]	

A.3.4 Test Cases with Different Channel Bandwidths

A.3.4.1 Test Cases with Different E-UTRA Channel Bandwidths

A.3.4.1.1 Introduction

In Annex A test cases involving E-UTRA cell(s) may be defined with different E-UTRA channel bandwidths to verify the same type of RRM requirement.

A.3.4.1.2 Principle of testing

If multiple test cases involving E-UTRA cell(s) are defined with different E-UTRA channel bandwidths to verify the same type of RRM requirement that is E-UTRA channel bandwidth independent, then the UE needs to be tested with only one channel bandwidth in each E-UTRA cell and with the same bandwidth in all the E-UTRA cells used in the test case.

A.3.5 Test Cases for Synchronous and Asynchronous DC Operations

A.3.5.1 EN-DC Test Cases for Synchronous and Asynchronous EN-DC Operations

A.3.5.1.1 Introduction

This clause defines a principle which is applicable to test cases verifying RRM requirements for EN-DC operation in synchronous and asynchronous scenarios.

In Annex A test cases may be defined in both synchronous EN-DC and asynchronous EN-DC scenarios to verify the same type of RRM requirement.

A.3.5.1.2 Principle of Testing

If EN-DC test cases are defined in both synchronous and asynchronous EN-DC scenarios to verify the same type of RRM requirement then the UE capable of both synchronous and asynchronous EN-DC operations needs to be tested with one of the tests in either synchronous or asynchronous EN-DC scenarios.

A.3.6 Antenna configurations

A.3.6.1 Antenna configurations for FR1

Unless otherwise specified, NR FDD or NR TDD cells in all RRM Test cases in AWGN propagation condition are configured with Antenna Configuration 1x2.

A.3.6.1.1 Antenna connection for 4 Rx capable UEs

A.3.6.1.1.1 Introduction

All tests in clause A.4 and A.6 are specified for UEs supporting 2RX. In this clause, the antenna connection method for applying 2RX tests to UEs supporting 4RX antenna ports is specified. No tests are currently specified in clause A.4 or A.6 which are applicable only to 4RX antenna ports, so 4RX capable UEs are always tested by reusing tests which were originally specified for 2RX UEs.

A.3.6.1.1.2 Principle of testing

A.3.6.1.1.2.1 Single carrier tests

For 4RX capable UEs supporting at least one band where 2RX is supported and 4RX is not supported, the, all single carrier tests specified in clause A.4 and A.6 except those in A.4.7 and A.6.7 shall be tested on any band where 2RX is supported and 4RX is not supported with the antenna connection specified in A.3.6.1.1.2.4. For single carrier tests specified in clause A.4.7 or A.6.7, all tests shall be tested with the antenna connection specified in A.3.6.1.1.2.4 for bands where 2RX is supported and 4RX is not supported, and the antenna connection specified in A.3.6.1.1.2.5 for bands where 4RX is supported.

For 4RX capable UEs which do not support any band where 2RX is supported and 4RX is not supported, all tests specified in clauses A.4 and A.6 shall be tested using the antenna connection specified in clause A.3.6.1.1.2.5. For radio link monitoring tests, the SNR levels are modified according to table A.3.6.1.1.2.1-1 and table A.3.6.1.1.2.1-2. For beam failure detection and link recovery tests, the SNR levels are modified according to table A.3.6.1.1.2.1-3.

Table A.3.6.1.1.2.1-1: Modified parameters for RLM out of sync testing with 4 RX antenna connection

Test case	SNR during T3 (dB)			
	Test 1	Test 2	Test 3	Test 4
A.4.5.1.1	-18	N/A	N/A	N/A
A.4.5.1.3	-18	N/A	N/A	N/A
A.4.5.1.5	-18	N/A	N/A	N/A
A.4.5.1.7	-18	N/A	N/A	N/A
A.5.5.1.1	-18	N/A	N/A	N/A
A.5.5.1.3	-18	N/A	N/A	N/A
A.5.5.1.5	-18	N/A	N/A	N/A
A.5.5.1.7	-18	N/A	N/A	N/A
A.6.5.1.1	-18	N/A	N/A	N/A
A.6.5.1.3	-18	N/A	N/A	N/A
A.6.5.1.5	-18	N/A	N/A	N/A
A.6.5.1.7	-18	N/A	N/A	N/A
A.7.5.1.1	-18	N/A	N/A	N/A
A.7.5.1.3	-18	N/A	N/A	N/A
A.7.5.1.5	-18	N/A	N/A	N/A
A.7.5.1.7	-18	N/A	N/A	N/A

Table A.3.6.1.1.2.1-2: Modified parameters for RLM in sync single carrier testing with 4 RX antenna connection

Test case	SNR during T3 (dB)		SNR during T4 (dB)	
	Test 1	Test 2	Test 1	Test 2
A.4.5.1.2	-18	N/A	-8	N/A
A.4.5.1.4	-18	N/A	-8	N/A
A.4.5.1.6	-18	N/A	-8	N/A
A.4.5.1.8	-18	N/A	-8	N/A
A.5.5.1.2	-18	N/A	-8	N/A
A.5.5.1.4	-18	N/A	-8	N/A

A.5.5.1.6	-18	N/A	-8	N/A
A.5.5.1.8	-18	N/A	-8	N/A
A.6.5.1.2	-18	N/A	-8	N/A
A.6.5.1.4	-18	N/A	-8	N/A
A.6.5.1.6	-18	N/A	-8	N/A
A.6.5.1.8	-18	N/A	-8	N/A
A.7.5.1.2	-18	N/A	-8	N/A
A.7.5.1.4	-18	N/A	-8	N/A
A.7.5.1.6	-18	N/A	-8	N/A
A.7.5.1.8	-18	N/A	-8	N/A

Table A.3.6.1.1.2.1-3: Modified parameters for Beam Failure Detection and Link Recovery testing with 4 RX antenna connection

Test case	SNR for RS in set q_0 during T3, T4 and T5 (dB)
	Test 1
A.4.5.5.1	-15
A.4.5.5.2	-15
A.4.5.5.3	-15
A.4.5.5.4	-15
A.4.5.5.5	-15
A.4.5.5.6	-15
A.5.5.5.1	-15
A.5.5.5.2	-15
A.5.5.5.3	-15
A.5.5.5.4	-15
A.5.5.5.5	-15
A.5.5.5.6	-15
A.5.5.5.7	-15
A.6.5.5.1	-15
A.6.5.5.2	-15
A.6.5.5.3	-15
A.6.5.5.4	-15
A.6.5.5.5	-15
A.6.5.5.6	-15
A.7.5.5.1	-15
A.7.5.5.2	-15
A.7.5.5.3	-15
A.7.5.5.4	-15
A.7.5.5.5	-15
A.7.5.5.6	-15
A.7.5.5.7	-15

A.3.6.1.1.2.2 Carrier aggregation tests

All carrier aggregation tests are performed using the antenna connection in clause A.3.6.1.1.2.4 for the PCell antenna connection if the PCell is on a band where 2RX is supported and 4RX is not supported, or using the antenna connection in A.3.6.1.1.2.5 for the PCell antenna connection if the PCell is on a band where 4RX is supported.

All carrier aggregation tests are performed using the antenna connection in clause A.3.6.1.1.2.4 for the SCell antenna connection if an SCell is on band where 2RX is supported and 4RX is not supported, or using the antenna connection in A.3.6.1.1.2.5 for the SCell antenna connection if an SCell is on a band where 4RX is supported.

A.3.6.1.1.2.3 EN-DC tests

All EN-DC tests are performed using the antenna connection in clause A.3.6.1.1.2.6 for the PCell antenna connection if the PCell is on a band where 2RX is supported and 4RX is not supported, or using the antenna connection in A.3.6.1.1.2.7 for the PCell antenna connection if the PCell is on a band where 4RX is supported.

All EN-DC tests are performed using the antenna connection in clause A.3.6.1.1.2.4 for the PSCell or SCell antenna connection if an SCell is on band where 2RX is supported and 4RX is not supported, or using antenna connection in A.3.6.1.1.2.5 for the SCell antenna connection if an SCell or PSCell is on a band where 4RX is supported.

A.3.6.1.1.2.4 Antenna connection for bands where 2RX is supported

For bands where 2RX is supported and 4RX is not supported, it is left to the UE declaration and antenna port configuration to decide which 2 of the 4 Rx ports are connected with data source from system simulator. The remaining 2 RX ports shall be connected with zero input. No test parameters or requirements are modified.

A.3.6.1.1.2.5 Antenna connection for bands where 4RX is supported

For bands where 4RX is supported, all 4 RX antennas are connected with data source from system simulator. The system simulator shall provide independent noise and fading (low correlation) for each antenna port. Except for the modifications to radio link monitoring thresholds and beam failure detection thresholds described in clauses A.3.6.1.1.2.1, no test parameters or requirements are modified.

A.3.6.1.1.2.6 EN-DC LTE Antenna connection for bands where 2RX is supported

For E-UTRAN bands where 2RX is supported and 4RX is not supported, it is left to the UE declaration and antenna port configuration to decide which 2 of the 4 Rx ports are connected with data source from system simulator. The remaining 2 RX ports shall be connected with zero input. No test parameters or requirements are modified.

A.3.6.1.1.2.7 EN-DC LTE Antenna connection for bands where 4RX is supported

For bands E-UTRAN where 4RX is supported, all 4 RX antennas are connected with data source from system simulator. The system simulator shall provide independent noise and fading (low correlation) for each antenna port. Except for the modifications to radio link monitoring thresholds described in clauses A.3.8.1.2.1 and A.3.8.1.2.2 of TS 36.133 [15], no test parameters or requirements are modified.

A.3.6.2 Antenna configurations for FR2

Unless otherwise specified, the default Downlink Antenna Configuration for NR FR2 cells is 1x2.

In case of Downlink Antenna Configuration 2x2 for NR FR2 cells, unless otherwise specified, the downlink signal is transmitted over the two polarizations (V and H) of the dual polarized antenna of the test equipment.

In both cases, the downlink signal is received assuming 2 UE baseband receivers. As the UE is tested following the Blackbox Approach with regard to the UE Rx antennas, the exact UE Rx antenna configuration is not relevant for the test configuration and has no impact on the test implementation.

A.3.6A Antenna configurations with unlicensed bands

A.3.6A.1 Antenna configurations for FR1

Unless otherwise specified, NR unlicensed cells in all RRM Test cases in AWGN propagation condition are configured with Antenna Configuration 1x2.

A.3.6A.1.1 Antenna connection for 4 Rx capable UEs

A.3.6A.1.1.1 Introduction

All tests in clause A.13, A.10, A.11, and A.12 are specified for UEs supporting 2RX. In this clause, the antenna connection method for applying 2RX tests to UEs supporting 4RX antenna ports is specified. No tests are currently specified in clause A.13, A.10, A.11 or A.12 which are applicable only to 4RX antenna ports, so 4RX capable UEs are always tested by reusing tests which were originally specified for 2RX UEs.

A.3.6A.1.1.2 Principle of testing

A.3.6A.1.1.2.1 Single carrier tests

For 4RX capable UEs supporting at least one 2RX band, the, all single carrier tests specified in clause A.13, A.10, A.11 and A.12 except those in A.13.4, A.10.5, A.11.6 and A.12.5 shall be tested on any band where 2RX is supported with the antenna connection specified in A.3.6A.1.1.2.4. For single carrier tests specified in clause A.13.4, A.10.5, A.11.6 or A.12.5, all tests shall be tested with the antenna connection specified in A.3.6A.1.1.2.4 for bands where 2RX is supported, and the antenna connection specified in A.3.6A.1.1.2.5 for bands where 4RX is supported.

For 4RX capable UEs which do not support any 2RX band, all tests specified in clauses A.13, A.10, A.11 and A.12 shall be tested using the antenna connection specified in clause A.3.6A.1.1.2.5. For radio link monitoring tests, the SNR levels are modified according to table A.3.6A.1.1.2.1-1 and table A.3.6A.1.1.2.1-2

Table A.3.6A.1.1.2.1-1: Modified parameters for RLM out of sync testing with 4 RX antenna connection

Test case	SNR during T3 (dB)			
	Test 1	Test 2	Test 3	Test 4
A.10.3.1.2	-18	N/A	N/A	N/A
A.10.3.1.4	TBD	N/A	N/A	N/A
A.11.4.1.2	-18	N/A	N/A	N/A
A.11.4.1.4	TBD	N/A	N/A	N/A

Table A.3.6A.1.1.2.1-2: Modified parameters for RLM in sync single carrier testing with 4 RX antenna connection

Test case	SNR during T3 (dB)		SNR during T4 (dB)	
	Test 1	Test 2	Test 1	Test 2
A.10.3.1.3	-18	N/A	-8	N/A
A.10.3.1.5	TBD	N/A	TBD	N/A
A.11.4.1.3	-18	N/A	-8	N/A
A.11.4.1.5	TBD	N/A	TBD	N/A

Table A.3.6A.1.1.2.1-3: Modified parameters for Beam Failure Detection and Link Recovery testing with 4 RX antenna connection

Test case	SNR for RS in set q_0 during T3, T4 and T5 (dB)	
	Test 1	Test 2
A.10.3.4.1	-15	N/A
A.10.3.4.2	-15	N/A
A.11.4.4.1	-15	N/A
A.11.4.4.2	-15	N/A

A.3.6A.1.1.2.2 Carrier aggregation tests

All carrier aggregation tests are performed using the antenna connection in clause A.3.6A.1.1.2.4 for the PCell antenna connection if the PCell is on a band where 2RX is supported or the antenna connection in A.3.6A.1.1.2.5 for the PCell antenna connection if the PCell is on a band where 4RX is supported.

All carrier aggregation tests are performed using the antenna connection in clause A.3.6A.1.1.2.4 for the SCell antenna connection if an SCell is on band where 2RX is supported or the testing procedure in A.3.6A.1.1.2.5 for the SCell antenna connection if an SCell is on a band where 4RX is supported.

A.3.6A.1.1.2.3 EN-DC tests

All carrier aggregation tests are performed using the antenna connection in clause A.3.6A.1.1.2.6 for the PCell antenna connection if the PCell is on a band where 2RX is supported or the antenna connection in A.3.6A.1.1.2.7 for the PCell antenna connection if the PCell is on a band where 4RX is supported.

All carrier aggregation tests are performed using the antenna connection in clause A.3.6A.1.1.2.4 for the PSCell or SCell antenna connection if an SCell is on band where 2RX is supported or the testing procedure in A.3.6A.1.1.2.5 for the SCell antenna connection if an SCell or PSCell is on a band where 4RX is supported.

A.3.6A.1.1.2.4 Antenna connection for bands where 2RX is supported

For bands where 2RX is supported, it is left to the UE declaration and AP configuration to decide which 2 of the 4 Rx ports are connected with data source from system simulator. The remaining 2 Rx ports shall be connected with zero input. No test parameters or requirements are modified.

A.3.6A.1.1.2.5 Antenna connection for bands where 4RX is supported

For bands where 4RX is supported, all 4 RX antennas are connected with data source from system simulator. The system simulator shall provide independent noise and fading (low correlation) for each antenna port. Except for the modifications to radio link monitoring thresholds described in clauses A.3.6A.1.1.2.1 and A.3.6A.1.1.2.2, no test parameters or requirements are modified.

A.3.6A.1.1.2.6 EN-DC LTE Antenna connection for bands where 2RX is supported

For bands where LTE 2RX is supported, it is left to the UE declaration and AP configuration to decide which 2 of the 4 Rx ports are connected with data source from system simulator. The remaining 2 Rx ports shall be connected with zero input. No test parameters or requirements are modified.

A.3.6A.1.1.2.7 EN-DC LTE Antenna connection for bands where 4RX is supported

For bands where LTE 4RX is supported, all 4 RX antennas are connected with data source from system simulator. The system simulator shall provide independent noise and fading (low correlation) for each antenna port. Except for the modifications to radio link monitoring thresholds described in clauses A.3.8.1.2.1 and A.3.8.1.2.2 of TS 36.133 [15], no test parameters or requirements are modified.

A.3.7 EN-DC test setup

A.3.7.1 Introduction

A.3.7.2 E-UTRAN Serving Cell Parameters

A.3.7.2.1 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR1

Table A.3.7.2.1-1 defines cell specific test parameters for E-UTRAN cell which can be used in EN-DC test cases or in any test case comprising at least one E-UTRA serving cell with all NR cells in FR1. Unless otherwise stated within the test, all measurements in Annex A.4 and A.5 are performed only on the NR carrier. The E-UTRA serving cell shall configured to not interfere with NR operation and the E-UTRA serving cell signal power shall not be critical to the test purpose.

Table A.3.7.2.1-1: E-UTRAN cell specific test parameters for tests with all NR cells in FR1

Parameter	Unit	E-UTRAN Cell
Duplex mode		FDD or TDD
TDD special subframe configuration ^{Note1}		6
TDD uplink-downlink configuration ^{Note1}		1

BW_{channel}		5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns ^{Note2}		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
PBCH_RA	dB	0
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	
PDCCH_RA	dB	
PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA ^{Note3}	dB	
OCNG_RB ^{Note3}	dB	
N_{oc} ^{Note4}	dBm/15 kHz	-104
$\bar{E}_s/N_{oc}$	dB	17
$\bar{E}_s/I_{ot}$	dB	17
RSRP ^{Note5}	dBm/15 kHz	-87
SCH_RP ^{Note5}	dBm/15 kHz	-87
I_o ^{Note5}	dBm/Ch BW	$-59.13 + 10 \log(N_{RB,c} / 50)$
Propagation Condition		AWGN
Antenna Configuration		1x2
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211. Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively. Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 5: $\bar{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		

A.3.7.2.2 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR2

Table A.3.7.2.2-1 defines cell specific test parameters for E-UTRAN cell which can be used in EN-DC test cases or in any test case comprising at least one E-UTRA serving cell with one or more NR cells in FR2.

Table A.3.7.2.2-1: E-UTRAN cell specific test parameters for tests with one or more NR cells in FR2

Parameter	Unit	E-UTRAN Cell
Duplex mode		FDD or TDD
TDD special subframe configuration ^{Note1}		6
TDD uplink-downlink configuration ^{Note1}		1
BW _{channel}	MHz	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns ^{Note2}		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
PBCH_RA	dB	0
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	
PDCCH_RA	dB	
PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA ^{Note3}	dB	
OCNG_RB ^{Note3}	dB	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211. Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively. Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 4: The E-UTRA signal is required only to ensure the E-UTRA link to the DUT in the EN-DC operation. The Test System shall provide a stable and noise-free E-UTRA signal without need of precise propagation modelling, path loss and polarization control. Further details of the E-UTRA signal configuration are not defined as part of the cell specific test parameters, since the E-UTRA link is not under performance verification and shall not affect the test result unless otherwise specifically stated in the test case.		

A.3.7A NR FR1-FR2 test setup

Some Test cases in clause A.7 have NR cells in both FR1 and FR2. Unless otherwise stated within the test, the NR FR1 Cell signal is required only to provide a link to the UE under test. The Test System shall provide a stable and

noise-free NR FR1 signal without need of precise propagation modelling, path loss and polarization control. Further details of the NR FR1 signal configuration are not defined as part of the cell specific test parameters, since the NR FR1 link is not under performance verification and shall not affect the test result unless otherwise specifically stated in the test case.

A.3.7B EN-DC test setup with unlicensed bands

A.3.7B.1 Introduction

A.3.7B.2 E-UTRAN Serving Cell Parameters

A.3.7B.2.1 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) under CCA in FR1

Table A.3.7A.2.1-1 defines cell specific test parameters for E-UTRAN cell which can be used in EN-DC test cases or in any test case comprising at least one E-UTRA serving cell with all NR cells under CCA in FR1. Unless otherwise stated within the test, all measurements in Annex A.4 and A.5 are performed only on the unlicensed NR carrier. The E-UTRA serving cell shall configured to not interfere with NR operation and the E-UTRA serving cell signal power shall not be critical to the test purpose.

Table A.3.7B.2.1-1: E-UTRAN cell specific test parameters for tests with all NR cells user CCA in FR1

Parameter	Unit	E-UTRAN Cell
Duplex mode		FDD or TDD
TDD special subframe configuration ^{Note1}		6
TDD uplink-downlink configuration ^{Note1}		1
BW _{channel}		5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns ^{Note2}		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
PBCH_RA	dB	0
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	
PDCCH_RA	dB	
PDCCH_RB	dB	

PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA ^{Note3}	dB	
OCNG_RB ^{Note3}	dB	
N_{oc} ^{Note4}	dBm/15 kHz	-104
$\hat{E}_s/N_{oc}$	dB	17
$\hat{E}_s/I_{ot}$	dB	17
RSRP ^{Note5}	dBm/15 kHz	-87
SCH_RP ^{Note5}	dBm/15 kHz	-87
I_o ^{Note5}	dBm/Ch BW	$-59.13+10\log(N_{RB,c}/50)$
Propagation Condition		AWGN
Antenna Configuration		1x2
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211. Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively. Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 5: E_s/I_{ot}, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		

A.3.7C LTE-FR1/FR2 test setup

Some Test cases in clause A.5 have LTE and FR2 NR cells. Unless otherwise stated within the test, the LTE Cell signal is required only to provide a link to the UE under test. The Test System shall provide a stable and noise-free LTE signal without need of precise propagation modelling, path loss and polarization control. Further details of the LTE signal configuration are not defined as part of the cell specific test parameters, since the LTE link is not under performance verification and shall not affect the test result unless otherwise specifically stated in the test case.

A.3.7D NE-DC test setup

A.3.7D.1 Introduction

A.3.7D.2 E-UTRAN Serving Cell Parameters

A.3.7D.2.1 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR1

The parameters are same as as specified in clause A.3.7.2.1.

A.3.7D.2.2 E-UTRAN Serving Cell Parameters for Tests with NR Cell(s) in FR2

The parameters are same as as specified in clause A.3.7.2.2.

A.3.8 PRACH configurations

A.3.8.1 Introduction

This clause provides the typical PRACH configurations used for RRM test cases defined in Annex A. To note that for other parameters not listed in this clause, either it can be derived from the set up of each test or it is subjected to RAN5 specifications.

A.3.8.2 PRACH configurations in FR1

A.3.8.2.1 FR1 PRACH configuration 1

FR1 PRACH configuration 1 in this clause provides the typical PRACH configuration for SSB-based contention based random access in FR1.

Table A.3.8.2.1-1: Parameters for FR1 PRACH configuration 1

Field	Value	Comment
prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention based preambles per SSB
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
ra-ContentionResolutionTimer	sf48	48 sub-frames
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
ra-ResponseWindow	sl10	10 slots
zeroCorrelationZoneConfig	11	N-CS configuration, $N_{CS} = 23$
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8.2.2 FR1 PRACH configuration 2

FR1 PRACH configuration 2 in this clause provides the typical PRACH configuration for SSB based non-contention based random access in FR1.

Table A.3.8.2.2-1: Parameters for FR1 PRACH configuration 2

Field	Value	Comment
prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions

msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
ra-ResponseWindow	sl10	10 slots
zeroCorrelationZoneConfig	11	N-CS configuration, $N_{CS} = 23$
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
ssb-ResourceList	ra-PreambleIndex = 40	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.
BFR-SSB-Resource	ra-PreambleIndex = 40	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
ra-ssb-OccasionMaskIndex	1	PRACH occasion index 1 is allowed
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8.2.3 FR1 PRACH configuration 3

FR1 PRACH configuration 3 in this clause provides the typical PRACH configuration for CSI-RS based non-contention based random access in FR1.

Table A.3.8.2.3-1: Parameters for FR1 PRACH configuration 3

Field	Value	Comment
<i>prach-ConfigurationIndex</i>	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
ra-ResponseWindow	sl10	10 slots
zeroCorrelationZoneConfig	11	N-CS configuration, $N_{CS} = 23$
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
csirs-ResourceList	ra-PreambleIndex = 40	Associated with CSI-RS configured
ra-OccasionList	1	RA occasions allowed corresponding to CSI-RS

rsrp-ThresholdCSI-RS	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8.2.4 FR1 PRACH configuration 4

FR1 PRACH configuration 4 in this clause provides the PRACH configuration for CSI-RS based non-contention based random access in FR1 to convey BFR.

Table A.3.8.2.4-1: Parameters for FR1 PRACH configuration 4

Field	Value	Comment
prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n200	Max number of RA preamble transmission performed before declaring a failure is 200
ra-ResponseWindow	sl1	1 slot
zeroCorrelationZoneConfig	11	N-CS configuration, $N_{CS} = 93$
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
BFR-CSIRS-Resource	ra-PreambleIndex = 40	Associated with CSI-RS configured
ra-OccasionList	1	RA occasions allowed corresponding to CSI-RS
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8.3 PRACH configurations in FR2

A.3.8.3.1 FR2 PRACH configuration 1

FR2 PRACH configuration 1 in this clause provides the typical PRACH configuration for SSB-based contention based random access in FR2.

Table A.3.8.3.1-1: Parameters for FR2 PRACH configuration 1

Field	Value	Comment
prach-ConfigurationIndex	190	Preamble Format C2, with 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-4 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	

totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention based preambles per SSB
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
ra-ContentionResolutionTimer	sf48	48 sub-frames
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
ra-ResponseWindow	sl10	10 slots
zeroCorrelationZoneConfig	11	N-CS configuration, $N_{CS} = 23$
Backoff Parameter Index	2	20 ms, as defined in table 7.2-1 in TS 38.321 [7].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8.3.2 FR2 PRACH configuration 2

FR2 PRACH configuration 2 in this clause provides the typical PRACH configuration for SSB based non-contention based random access in FR2.

Table A.3.8.3.2-1: Parameters for FR2 PRACH configuration 2

Field	Value	Comment
prach-ConfigurationIndex	190	Preamble Format C2, with 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-4 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
ra-ResponseWindow	sl10	10 slots
zeroCorrelationZoneConfig	11	N-CS configuration, $N_{CS} = 23$
Backoff Parameter Index	2	20 ms, as defined in table 7.2-1 in TS 38.321 [7].
ssb-ResourceList	ra-PreambleIndex = 40	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.

<i>BFR-SSB-Resource</i>	ra-PreambleIndex = 40	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
ra-ssb-OccasionMaskIndex	1	PRACH occasion index 1 is allowed
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8.3.3 FR2 PRACH configuration 3

FR2 PRACH configuration 3 in this clause provides the typical PRACH configuration for CSI-RS based non-contention based random access in FR2.

Table A.3.8.3.3-1: Parameters for FR2 PRACH configuration 3	Field	Value	Comment
	prach-ConfigurationIndex	190	Preamble Format C2, with 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-4 in TS 38.211 [6].
	msg1-SubcarrierSpacing	Same as UL carrier SCS	
	totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
	numberOfRA-PreamblesGroupA	48	No group B.
	prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
	ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
	msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
	powerRampingStep	dB2	
	preambleReceivedTargetPower	dBm-120	
	preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
	ra-ResponseWindow	sl10	10 slots
	zeroCorrelationZoneConfig	11	N-CS configuration, N _{cs} = 23
	Backoff Parameter Index	2	20 ms, as defined in table 7.2-1 in TS 38.321 [7].
	csirs-ResourceList	ra-PreambleIndex = 40	Associated with CSI-RS configured
	ra-OccasionList	1	RA occasions allowed corresponding to CSI-RS
	rsrp-ThresholdCSI-RS	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Note: For further information see clause 6.3.2 in TS 38.331 [2].			

A.3.8.3.4 FR2 PRACH configuration 4

FR2 PRACH configuration 4 in this clause provides the PRACH configuration for CSI-RS based non-contention based random access in FR2 to convey BFR.

Table A.3.8.3.4-1: Parameters for FR2 PRACH configuration 4

Field	Value	Comment
-------	-------	---------

prach-ConfigurationIndex	190	Preamble Format C2, with 10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-4 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-120	
preambleTransMax	n200	Max number of RA preamble transmission performed before declaring a failure is 200.
ra-ResponseWindow	sl40	40 slots
zeroCorrelationZoneConfig	11	N-CS configuration, $N_{CS} = 23$
Backoff Parameter Index	2	20 ms, as defined in table 7.2-1 in TS 38.321 [7].
BFR-CSIRS-Resource	ra-PreambleIndex = 40	Associated with CSI-RS configured
ra-OccasionList	1	RA occasions allowed corresponding to CSI-RS
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8A PRACH configurations under CCA

A.3.8A.1 Introduction

This clause provides the typical PRACH configurations used for RRM test cases defined in Annex A. To note that for other parameters not listed in this clause, either it can be derived from the set up of each test or it is subjected to RAN5 specifications.

A.3.8A.2 PRACH configurations in FR1

A.3.8A.2.1 FR1 PRACH configuration 1 under CCA

FR1 PRACH configuration 1 under CCA in this clause provides the typical PRACH configuration for SSB-based contention based random access in FR1.

Table A.3.8A.2.1-1: Parameters for FR1 PRACH configuration 1 under CCA

Field	Value	Comment
prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.

ssb-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention based preambles per SSB
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
ra-ContentionResolutionTimer	sf48	48 sub-frames
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-114	Increased by 6 dB compared with FR1 PRACH configuration 1 for random access test with UL CCA failures.
preambleTransMax	n20	Max number of RA preamble transmission performed before declaring a failure is 20 to account for CCA failures
ra-ResponseWindow	sl20	20 slots
zeroCorrelationZoneConfig	11	N-CS configuration, $N_{CS} = 23$
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.8A.2.2 FR1 PRACH configuration 2 under CCA

FR1 PRACH configuration 2 under CCA in this clause provides the typical PRACH configuration for SSB based non-contention based random access in FR1.

Table A.3.8A.2.2-1: Parameters for FR1 PRACH configuration 2 under CCA

Field	Value	Comment
prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msg1-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
prach-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msg1-FDM	One	One PRACH transmission occasions FDMed in one time instance.
powerRampingStep	dB2	
preambleReceivedTargetPower	dBm-114	Increased by 6 dB compared with FR1 PRACH configuration 2 for random access test with UL CCA failures.
preambleTransMax	n20	Max number of RA preamble transmission performed before declaring a failure is 20 to account for CCA failures
ra-ResponseWindow	sl20	20 slots
zeroCorrelationZoneConfig	11	N-CS configuration, $N_{CS} = 23$
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
ssb-ResourceList	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.

<i>BFR-SSB-Resource</i>	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
ra-ssb-OccasionMaskIndex	1	PRACH occasion index 1 is allowed
rsrp-ThresholdSSB	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.9 BWP configurations

A.3.9.1 Introduction

This clause provides the typical BWP configurations used for RRM test cases defined in Annex A. For downlink BWP, both initial BWP and dedicated BWP configurations are specified in clause A.3.9.2 and for uplink BWP, both initial BWP and dedicated BWP configurations are specified in clause A.3.9.3. To note that for other parameters not listed in this clause, either it can be derived from the set up of each test or it is subjected to RAN5 specifications.

A.3.9.2 Downlink BWP configurations

A.3.9.2.1 Initial BWP

Table A.3.9.2.1-1: Downlink BWP patterns for initial BWP configuration

BWP Parameters	Unit	Values		
Reference BWP		DLBWP.0.1	DLBWP.0.2	
Starting PRB index		0	RB _c ^{Note 1}	
Bandwidth	RB	Same as RF channel defined in each test	same as RMSI CORESET (CORESET #0) defined in each test	
Note 1: RB _c is the lowest PRB index to guarantee the BWP including CORESET #0 which is defined in Clause A.3.1.2.				

A.3.9.2.2 Dedicated BWP

Table A.3.9.2.2-1: Downlink BWP patterns for dedicated BWP configuration

BWP Parameters	Unit	Values						
Reference BWP		DLBWP.1.1	DLBWP.1.2	DLBWP.1.3	DLBWP.1.4	DLBWP.1.5	DLBWP.1.6	DLBWP.1.7
Starting PRB index		0	RB _b ^{Note 1}	RB _a ^{Note 2}	0	RB _b ^{Note 1}	RB _a ^{Note 2}	RB _c ^{Note 3}
Bandwidth	RB	Same as RF channel defined in each test	25 for SSB SCS = 15KHz, 51 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz	25 for SSB SCS = 15KHz, 51 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz	24 for SSB SCS = 120KHz 24 for SSB SCS = 240KHz	24 for SSB SCS = 120KHz 24 for SSB SCS = 240KHz	24 for SSB SCS = 120KHz 24 for SSB SCS = 240KHz	25 for SSB SCS = 15KHz, 51 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz

			48 for SSB SCS = 240KHz	48 for SSB SCS = 240KHz				48 for SSB SCS = 240KHz
Note 1:	RB _b is the lowest PRB index to guarantee the BWP not fully overlapped with SSB PRB index (RB _J , RB _{J+1} ,..., RB _{J+19}) which is defined in Clause A.3.10.							
Note 2:	RB _a is the lowest PRB index to guarantee the BWP including SSB PRB index (RB _J , RB _{J+1} ,..., RB _{J+19}) which is defined in Clause A.3.10.							
Note 3:	RB _c is the PRB index having an offset of 6 PRBs with respect to the start of SSB PRB index (RB _J , RB _{J+1} ,..., RB _{J+19}) which is defined in Clause A.3.10.							

A.3.9.3 Uplink BWP configurations

A.3.9.3.1 Initial BWP

Table A.3.9.3.1-1: Uplink BWP patterns for initial BWP configuration

BWP Parameters	Unit	Values		
Reference BWP		ULBWP.0.1	ULBWP.0.2	
Starting PRB index		0	RB _c ^{Note 1}	
Bandwidth	RB	Same as RF channel defined in each test	same as RMSI CORESET (CORESET #0) defined in each test	
Note 1: RB _c is same as RB _c for DLBWP.0.2 as defined in Table A.3.9.2.1-1.				

A.3.9.3.2 Dedicated BWP

Table A.3.9.3.2-1: Uplink BWP patterns for dedicated BWP configuration

BWP Parameters	Unit	Values						
Reference BWP		ULBWP.1.1	ULBWP.1.2	ULBWP.1.3	ULBWP.1.4	ULBWP.1.5	ULBWP.1.6	ULBWP.1.7
Starting PRB index		0	RB _b ^{Note 1}	RB _a ^{Note 2}	0	RB _b ^{Note 1}	RB _a ^{Note 2}	RB _c ^{Note 3}
Bandwidth	RB	Same as RF channel defined in each test	25 for SSB SCS = 15KHz, 51 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 48 for SSB SCS = 240KHz	25 for SSB SCS = 15KHz, 51 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 48 for SSB SCS = 240KHz	24 for SSB SCS = 120KHz 24 for SSB SCS = 240KHz	24 for SSB SCS = 120KHz 24 for SSB SCS = 240KHz	24 for SSB SCS = 120KHz 24 for SSB SCS = 240KHz	25 for SSB SCS = 15KHz, 51 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 48 for SSB SCS = 240KHz
Note 1: RB _b is same as RB _b for DLBWP.1.2 as defined in Table A.3.9.2.2-1. Note 2: RB _a is same as RB _a for DLBWP.1.3 as defined in Table A.3.9.2.2-1. Note 3: RB _c is same as RB _c for DLBWP.1.7 as defined in Table A.3.9.2.2-1.								

A.3.9A BWP configurations for RedCap

A.3.9A.1 Introduction

This clause provides the typical BWP configurations used for RedCap RRM test cases defined in Annex A. For downlink BWP, RedCap dedicated BWP configurations are specified in clause A.3.9A.2 and for uplink BWP, RedCap dedicated BWP configurations are specified in clause A.3.9A.3. To note that for other parameters not listed in this clause, either it can be derived from the set up of each test or it is subjected to RAN5 specifications.

A.3.9A.2 Downlink BWP configurations

A.3.9A.2.1 Dedicated BWP

Table A.3.9A.2.2-1: Downlink BWP patterns for RedCap dedicated BWP configuration

BWP Parameters	Unit	Values		
Reference BWP		DLBWP.1.1 RedCap	DLBWP.1.2 RedCap	DLBWP.1.3 RedCap
Starting PRB index		RB _a Note 1	RB _b Note 2	RB _c Note 3
Bandwidth	RB	25 for SSB SCS = 15KHz, 25 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 16 for SSB SCS = 240KHz	25 for SSB SCS = 15KHz, 25 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 16 for SSB SCS = 240KHz	25 for SSB SCS = 15KHz, 25 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 16 for SSB SCS = 240KHz
Note 1: RB _a is the lowest PRB index to guarantee the BWP including SSB PRB index (RB _J , RB _{J+1} ,..., RB _{J+19}) which is defined in Clause A.3.10.				
Note 2: RB _b is the lowest PRB index to guarantee the BWP not fully overlapped with SSB PRB index (RB _J , RB _{J+1} ,..., RB _{J+19}) which is defined in Clause A.3.10.				
Note 3: RB _c is the lowest PRB index to guarantee the BWP including SSB PRB index (RB _J , RB _{J+1} ,..., RB _{J+19}) which is defined in Clause A.3.10.				

A.3.9A.3 Uplink BWP configurations

A.3.9A.3.1 Dedicated BWP

Table A.3.9A.3.1-1: Uplink BWP patterns for RedCap dedicated BWP configuration

BWP Parameters	Unit	Values		
Reference BWP		ULBWP.1.1 RedCap	ULBWP.1.2 RedCap	ULBWP.1.3 RedCap
Starting PRB index		RB _a Note 1	RB _b Note 2	RB _c Note 3
Bandwidth	RB	25 for SSB SCS = 15KHz, 25 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 16 for SSB SCS = 240KHz	25 for SSB SCS = 15KHz, 25 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 16 for SSB SCS = 240KHz	25 for SSB SCS = 15KHz, 25 for SSB SCS = 30KHz, 32 for SSB SCS = 120KHz 16 for SSB SCS = 240KHz
Note 1: RB _a is the same as RB _a for DLBWP.1.1 RedCap.				
Note 2: RB _b is the same as RB _b for DLBWP.1.2 RedCap.				
Note 3: RB _c is the same as RB _c for DLBWP.1.3 RedCap.				

A.3.10 SSB Configurations

A.3.10.1 SSB Configurations for FR1

A.3.10.1.1 SSB pattern 1 in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz

Table A.3.10.1.1-1: SSB.1 FR1: SSB Pattern 1 for SSB SCS=15 kHz in 10 MHz channel

SSB Parameters	Values
Channel bandwidth	10 MHz
SSB SCS	15 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB ^{Note 2}	2-5
Slot numbers containing SSB ^{Note 2}	0
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSB within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+19}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.1.2 SSB pattern 2 in FR1: SSB allocation for SSB SCS=30 kHz in 40 MHz

Table A.3.10.1.2-1: SSB.2 FR1: SSB Pattern 2 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters	Values
Channel bandwidth	40 MHz
SSB SCS	30 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB ^{Note 3}	4-7 or 2-5 ^{Note 2}
Slot numbers containing SSB ^{Note 3}	0
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSB within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+19}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen.	
Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves	

A.3.10.1.3 SSB pattern 3 in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz

Table A.3.10.1.3-1: SSB.3 FR1: SSB Pattern 3 for SSB SCS=15 kHz in 10 MHz channel

SSB Parameters	Values
Channel bandwidth	10 MHz
SSB SCS	15 kHz
SSB periodicity (T_{SSB})	20 ms

Number of SSBs per SS-burst	2	
SS/PBCH block index	0	1
Symbol numbers containing SSB ^{Note 2}	2-5	8-11
Slot numbers containing SSB ^{Note 2}	0	0
SFN containing SSB	SFN mod (max(T _{SSB} ,10ms)/10ms) = 0	
RB numbers containing SSB within channel BW	(RB _J , RB _{J+1} ,..., RB _{J+19}) ^{Note 1}	
Note 1:	RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2:	These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.1.4 SSB pattern 4 in FR1: SSB allocation for SSB SCS=30 kHz in 40 MHz

Table A.3.10.1.4-1: SSB.4 FR1: SSB Pattern 4 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters		Values	
Channel bandwidth		40 MHz	
SSB SCS		30 kHz	
SSB periodicity (T_{SSB})		20 ms	
Number of SSBs per SS-burst		2	
SS/PBCH block index		0	1
Symbol numbers containing SSB ^{Note 3}		4-7 or 2-5 ^{Note 2}	8-11
Slot numbers containing SSB ^{Note 3}		0	0
SFN containing SSB		SFN mod (max(T_{SSB} ,10ms)/10ms) = 0	
RB numbers containing SSB within channel BW		(RB _J , RB _{J+1} ,..., RB _{J+19}) ^{Note 1}	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].			
Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen.			
Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.			

A.3.10.1.5 SSB pattern 5 in FR1: SSB allocation for SSB SCS=15 kHz starting from odd SFN in 10 MHz

Table A.3.10.1.5-1: SSB.5 FR1: SSB Pattern 5 for SSB SCS=15 kHz in 10 MHz channel

SSB Parameters	Values
Channel bandwidth	10 MHz
SSB SCS	15 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB ^{Note 2}	2-5
Slot numbers containing SSB ^{Note 2}	0
SFN containing SSB	SFN mod (max(T_{SSB} , 10ms)/10ms) = 1
RB numbers containing SSB within channel BW	(RB _J , RB _{J+1} , ..., RB _{J+19}) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.1.6 SSB pattern 6 in FR1: SSB allocation for SSB SCS=30 kHz starting from odd SFN in 40 MHz

Table A.3.10.1.6-1: SSB.6 FR1: SSB Pattern 6 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters	Values
Channel bandwidth	40 MHz
SSB SCS	30 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB ^{Note 3}	4-7 or 2-5 ^{Note 2}
Slot numbers containing SSB ^{Note 3}	0
SFN containing SSB	SFN mod $(\max(T_{SSB}, 10\text{ms})/10\text{ms}) = 1$
RB numbers containing SSB within channel BW	$(RB_J, RB_{J+1}, \dots, RB_{J+19})$ ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen. Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.1.7 SSB pattern 7 in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz

Table A.3.10.1.7-1: SSB.7 FR1: SSB Pattern 7 for SSB SCS=15 kHz in 10 MHz channel

SSB Parameters		Values	
Channel bandwidth		10 MHz	
SSB SCS		15 kHz	
SSB periodicity (T_{SSB})		20 ms	
Number of SSBs per SS-burst		2	
SS/PBCH block index		2	3
Symbol numbers containing SSB ^{Note 2}		2-5	8-11
Slot numbers containing SSB ^{Note 2}		1	1
SFN containing SSB		SFN mod (max(T_{SSB} ,10ms)/10ms) = 0	
RB numbers containing SSB within channel BW		$(RB_J, RB_{J+1}, \dots, RB_{J+19})$ ^{Note 1}	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].			
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.			

A.3.10.1.8 SSB pattern 8 in FR1: SSB allocation for SSB SCS=30 kHz in 40 MHz

Table A.3.10.1.8-1: SSB.8 FR1: SSB Pattern 8 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters	Values	
Channel bandwidth	40 MHz	
SSB SCS	30 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	2	
SS/PBCH block index	2	3
Symbol numbers containing SSB ^{Note 3}	4-7 or 2-5 ^{Note 2}	8-11
Slot numbers containing SSB ^{Note 3}	1	1

SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSB within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+19}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen.	
Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.2 SSB Configurations for FR2

A.3.10.2.1 SSB pattern 1 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10.2.1-1: SSB.1 FR2: SSB Pattern 1 for SSB SCS = 120 kHz in 100 MHz channel with 2 SSBs per SS-burst

SSB Parameters		Values	
Channel bandwidth		100 MHz	
SSB SCS		120 kHz	
SSB periodicity (T_{SSB})		20 ms	
Number of SSBs per SS-burst		2	
SS/PBCH block index		0	1
Symbol numbers containing SSBs ^{Note 2}		4-7	8-11
Slot numbers containing SSB ^{Note 2}		0	0
SFN containing SSB		SFN mod (max(T_{SSB} ,10ms)/10ms) = 0	
RB numbers containing SSBs within channel BW		(RB _J , RB _{J+1} ,..., RB _{J+19}) ^{Note 1}	
Note 1:	RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].		
Note 2:	These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.2 SSB pattern 2 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10.2.2-1: SSB.2 FR2: SSB Pattern 2 for SSB SCS = 240 kHz in 100 MHz channel with 2 SSBs per SS-burst

SSB Parameters		Values	
Channel bandwidth		100 MHz	
SSB SCS		240 kHz	
SSB periodicity (T_{SSB})		20 ms	
Number of SSBs per SS-burst		2	
SS/PBCH block index		0	1
Symbol numbers containing SSBs ^{Note 2}		8-11	12-13, 0-1
Slot numbers containing SSB ^{Note 2}		0	0, 1
SFN containing SSB		SFN mod (max(T_{SSB} ,10ms)/10ms) = 0	
RB numbers containing SSBs within channel BW		(RB _J , RB _{J+1} ,..., RB _{J+39}) ^{Note 1}	
Note 1:	RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].		
Note 2:	These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.3 SSB pattern 3 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10.2.3-1: SSB.3 FR2: SSB Pattern 3 for SSB SCS = 120 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	120 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSBs ^{Note 2}	4-7
Slot numbers containing SSB ^{Note 2}	0
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSBs within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+19}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.2.4 SSB pattern 4 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10.2.4-1: SSB.4 FR2: SSB Pattern 4 for SSB SCS = 240 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	240 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSBs ^{Note 2}	8-11
Slot numbers containing SSB ^{Note 2}	0
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSBs within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+39}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.2.5 SSB pattern 5 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10.2.5-1: SSB.5 FR2: SSB Pattern 5 for SSB SCS = 120 kHz in 100 MHz channel with 2 SSBs per SS-burst

SSB Parameters	Values	
Channel bandwidth	100 MHz	
SSB SCS	120 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	2	
SS/PBCH block index	2	3
Symbol numbers containing SSBs ^{Note 2}	2-5	6-9
Slot numbers containing SSB ^{Note 2}	1	1
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0	
RB numbers containing SSBs within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+19}$) ^{Note 1}	

Note 1:	RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].
Note 2:	These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.

A.3.10.2.6 SSB pattern 6 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10.2.6-1: SSB.6 FR2: SSB Pattern 6 for SSB SCS = 240 kHz in 100 MHz channel with 2 SSBs per SS-burst

SSB Parameters		Values	
Channel bandwidth		100 MHz	
SSB SCS		240 kHz	
SSB periodicity (T_{SSB})		20 ms	
Number of SSBs per SS-burst		2	
SS/PBCH block index		2	3
Symbol numbers containing SSBs ^{Note 2}		2-5	6-9
Slot numbers containing SSB ^{Note 2}		1	1
SFN containing SSB		SFN mod (max(T_{SSB} ,10ms)/10ms) = 0	
RB numbers containing SSBs within channel BW		(RB _J , RB _{J+1} ,..., RB _{J+39}) ^{Note 1}	
Note 1:	RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].		
Note 2:	These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.7 SSB pattern 7 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10.2.7-1: SSB.7 FR2: SSB Pattern 7 for SSB SCS = 120 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	120 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	1
Symbol numbers containing SSBs ^{Note 2}	8-11
Slot numbers containing SSB ^{Note 2}	0
SFN containing SSB	SFN mod $(\max(T_{SSB}, 10\text{ms})/10\text{ms}) = 0$
RB numbers containing SSBs within channel BW	$(RB_J, RB_{J+1}, \dots, RB_{J+19})^{\text{Note 1}}$
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.2.8 SSB pattern 8 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10.2.8-1: SSB.8 FR2: SSB Pattern 8 for SSB SCS = 240 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	240 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1

SS/PBCH block index	1	
Symbol numbers containing SSBs ^{Note 2}	12-13	0-1
Slot numbers containing SSB ^{Note 2}	0	1
SFN containing SSB	SFN mod (max(T _{SSB} ,10ms)/10ms) = 0	
RB numbers containing SSBs within channel BW	(RB _J , RB _{J+1} ,..., RB _{J+39}) ^{Note 1}	
Note 1:	RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2:	These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.2.9 SSB pattern 9 in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10.2.9-1: SSB.9 FR2: SSB Pattern 9 for SSB SCS = 120 kHz in 100 MHz channel with 2 SSBs per SS-burst

SSB Parameters		Values	
Channel bandwidth		100 MHz	
SSB SCS		120 kHz	
SSB periodicity (T_{SSB})		20 ms	
Number of SSBs per SS-burst		2	
SS/PBCH block index		2	3
Symbol numbers containing SSBs ^{Note 2}		2-5	6-9
Slot numbers containing SSB ^{Note 2}		1	1
SFN containing SSB		SFN mod (max(T_{SSB} ,10ms)/10ms) = 0	
RB numbers containing SSBs within channel BW		(RB _J , RB _{J+1} ,..., RB _{J+19}) ^{Note 1}	
Note 1:	RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].		
Note 2:	These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.10 SSB pattern 10 in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10.2.10-1: SSB.10 FR2: SSB Pattern 10 for SSB SCS = 240 kHz in 100 MHz channel with 2 SSBs per SS-burst

SSB Parameters		Values	
Channel bandwidth		100 MHz	
SSB SCS		240 kHz	
SSB periodicity (T_{SSB})		20 ms	
Number of SSBs per SS-burst		2	
SS/PBCH block index		2	3
Symbol numbers containing SSBs	Note 2	4-7	8-11
Slot numbers containing SSB	Note 2	1	1
SFN containing SSB		SFN mod (max(T_{SSB} ,10ms)/10ms) = 0	
RB numbers containing SSBs within channel BW		(RB _J , RB _{J+1} ,..., RB _{J+39}) ^{Note 1}	
Note 1:	RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].		
Note 2:	These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.11 SSB pattern 11 in FR2: SSB allocation for SSB SCS=480 kHz in 400 MHz

Table A.3.10.2.11-1: SSB.11 FR2: SSB Pattern 11 for SSB SCS = 480 kHz in 400 MHz channel with 2 SSBs per SS-burst

SSB Parameters		Values	
Channel bandwidth		400 MHz	
SSB SCS		480 kHz	
SSB periodicity (T_{SSB})		20 ms	
Number of SSBs per SS-burst		2	
SS/PBCH block index		0	1
Symbol numbers containing SSBs ^{Note 2}		2-5	9-12
Slot numbers containing SSB ^{Note 2}		0	0
SFN containing SSB		SFN mod (max(T_{SSB} ,10ms)/10ms) = 0	
RB numbers containing SSBs within channel BW		(RB _J , RB _{J+1} ,..., RB _{J+19}) ^{Note 1}	
Note 1:	RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].		
Note 2:	These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.12 SSB pattern 12 in FR2: SSB allocation for SSB SCS=960 kHz in 400 MHz

Table A.3.10.2.12-1: SSB.12 FR2: SSB Pattern 12 for SSB SCS = 960 kHz in 400 MHz channel with 2 SSBs per SS-burst

SSB Parameters		Values	
Channel bandwidth		400 MHz	
SSB SCS		960 kHz	
SSB periodicity (T_{SSB})		20 ms	
Number of SSBs per SS-burst		2	
SS/PBCH block index		0	1
Symbol numbers containing SSBs ^{Note 2}		2-5	9-12
Slot numbers containing SSB ^{Note 2}		0	0
SFN containing SSB		SFN mod (max(T_{SSB} ,10ms)/10ms) = 0	
RB numbers containing SSBs within channel BW		(RB _J , RB _{J+1} ,..., RB _{J+39}) ^{Note 1}	
Note 1:	RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].		
Note 2:	These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.		

A.3.10.2.13 SSB pattern 13 in FR2: SSB allocation for SSB SCS=480 kHz in 400 MHz

Table A.3.10.2.13-1: SSB.13 FR2: SSB Pattern 13 for SSB SCS = 480 kHz in 400 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	400 MHz
SSB SCS	480 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSBs ^{Note 2}	2-5
Slot numbers containing SSB ^{Note 2}	0

SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSBs within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+19}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.2.14 SSB pattern 14 in FR2: SSB allocation for SSB SCS=960 kHz in 400 MHz

Table A.3.10.2.14-1: SSB.14 FR2: SSB Pattern 14 for SSB SCS = 960 kHz in 400 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	400 MHz
SSB SCS	960 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSBs ^{Note 2}	2-5
Slot numbers containing SSB ^{Note 2}	0
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSBs within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+39}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.2.15 SSB pattern 15 in FR2: SSB allocation for SSB SCS=480 kHz in 400 MHz

Table A.3.10.2.15-1: SSB.15 FR2: SSB Pattern 15 for SSB SCS = 480 kHz in 400 MHz channel with 2 SSBs per SS-burst

SSB Parameters		Values	
Channel bandwidth		400 MHz	
SSB SCS		480 kHz	
SSB periodicity (T_{SSB})		20 ms	
Number of SSBs per SS-burst		2	
SS/PBCH block index		2	3
Symbol numbers containing SSBs ^{Note 2}		2-5	9-12
Slot numbers containing SSB ^{Note 2}		1	1
SFN containing SSB		SFN mod (max(T_{SSB} ,10ms)/10ms) = 0	
RB numbers containing SSBs within channel BW		(RB _J , RB _{J+1} ,..., RB _{J+19}) ^{Note 1}	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].			
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.			

A.3.10.2.16 SSB pattern 16 in FR2: SSB allocation for SSB SCS=960 kHz in 400 MHz

Table A.3.10.2.16-1: SSB.16 FR2: SSB Pattern 16 for SSB SCS = 960 kHz in 400 MHz channel with 2 SSBs per SS-burst

SSB Parameters		Values	
Channel bandwidth		400 MHz	
SSB SCS		960 kHz	
SSB periodicity (T_{SSB})		20 ms	
Number of SSBs per SS-burst		2	
SS/PBCH block index		2	3
Symbol numbers containing SSBs ^{Note 2}		2-5	9-12
Slot numbers containing SSB ^{Note 2}		1	1
SFN containing SSB		SFN mod (max(T_{SSB} ,10ms)/10ms) = 0	
RB numbers containing SSBs within channel BW		(RB _J , RB _{J+1} ,..., RB _{J+39}) ^{Note 1}	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].			
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.			

A.3.10.2.17 SSB pattern 17 in FR2: SSB allocation for SSB SCS=480 kHz in 400 MHz

Table A.3.10.2.17-1: SSB.17 FR2: SSB Pattern 17 for SSB SCS = 480 kHz in 400 MHz channel with 1 SSB per SS-burst

SSB Parameters		Values
Channel bandwidth		400 MHz
SSB SCS		480 kHz
SSB periodicity (T_{SSB})		20 ms
Number of SSBs per SS-burst		1
SS/PBCH block index		1
Symbol numbers containing SSBs ^{Note 2}		9-12
Slot numbers containing SSB ^{Note 2}		0
SFN containing SSB		SFN mod (max(T_{SSB} ,10ms)/10ms) = 0
RB numbers containing SSBs within channel BW		($RB_J, RB_{J+1}, \dots, RB_{J+19}$) ^{Note 1}
Note 1:	RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2:	These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10.2.18 SSB pattern 18 in FR2: SSB allocation for SSB SCS=960 kHz in 400 MHz

Table A.3.10.2.18-1: SSB.18 FR2: SSB Pattern 18 for SSB SCS = 960 kHz in 400 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values	
Channel bandwidth	400 MHz	
SSB SCS	960 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSBs per SS-burst	1	
SS/PBCH block index	1	
Symbol numbers containing SSBs ^{Note 2}	9-12	
Slot numbers containing SSB ^{Note 2}	0	

SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSBs within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+39}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10A SSB Configurations under CCA

A.3.10A.1 SSB Configurations under CCA for FR1

A.3.10A.1.1 SSB pattern 1 under CCA for semi-static channel access: SSB allocation for SSB SCS=30kHz in 40MHz

Table A.3.10A.1.1-1: SSB.1 CCA: SSB Pattern 1 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters	Values
Channel bandwidth	40 MHz
SSB SCS	30 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSB indexes per SS-burst (N_{SSB}^{QCL})	1
Number of SS/PBCH block candidates per SSB index	1
SS/PBCH block candidate position	0
SS/PBCH block index	0
Symbol numbers containing SSB ^{Note 2}	2-5
Slot numbers containing SSB ^{Note 2}	0
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSB within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+19}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves	

A.3.10A.1.2 SSB pattern 2 under CCA for dynamic channel access: SSB allocation for SSB SCS=30kHz in 40MHz

Table A.3.10A.1.2-1: SSB.2 CCA: SSB Pattern 2 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters	Values	
Channel bandwidth	40 MHz	
SSB SCS	30 kHz	
SSB periodicity (T_{SSB})	20 ms	
Number of SSB indexes per SS-burst (N_{SSB}^{QCL})	1	
Number of SS/PBCH block candidates per SSB index	2	
SS/PBCH block candidate position	0	2
SS/PBCH block index	0	0
Symbol numbers containing SSB ^{Note 2}	2-5	2-5
Slot numbers containing SSB ^{Note 2}	0	1
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0	
RB numbers containing SSB within channel BW	(RB _J , RB _{J+1} , ..., RB _{J+19}) ^{Note 1}	

Note 1:	RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].
Note 2:	These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves

A.3.10A.1.3 SSB pattern 3 under CCA for semi-static channel access: SSB allocation for SSB SCS=30 kHz in 40 MHz

Table A.3.10.1.3-1: SSB.3 CCA: SSB Pattern 3 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters		Values	
Channel bandwidth		40 MHz	
SSB SCS		30 kHz	
SSB periodicity (T_{SSB})		20 ms	
Number of SSB indexes per SS-burst (N_{SSB}^{QCL})		2	
Number of SS/PBCH block candidates per SSB index		1	
SS/PBCH block candidate position		0	1
SS/PBCH block index		0	1
Symbol numbers containing SSB ^{Note 2}		2-5	8-11
Slot numbers containing SSB ^{Note 2}		0	0
SFN containing SSB		SFN mod (max(T_{SSB} ,10ms)/10ms) = 0	
RB numbers containing SSB within channel BW		$(RB_J, RB_{J+1}, \dots, RB_{J+19})$ ^{Note 1}	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].			
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.			

A.3.10A.1.4 SSB pattern 4 under CCA for dynamic channel access: SSB allocation for SSB SCS=30 kHz in 40 MHz

Table A.3.10.1.4-1: SSB.4 CCA: SSB Pattern 4 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters	Values			
Channel bandwidth	40 MHz			
SSB SCS	30 kHz			
SSB periodicity (T_{SSB})	20 ms			
Number of SSB indexes per SS-burst (N_{SSB}^{QCL})	2			
Number of SS/PBCH block candidates per SSB index	2			
SS/PBCH block candidate position	0	2	1	3
SS/PBCH block index	0	0	1	1
Symbol numbers containing SSB ^{Note 2}	2-5	2-5	8-11	8-11
Slot numbers containing SSB ^{Note 2}	0	1	0	1
SFN containing SSB	SFN mod (max(T_{SSB} ,10ms)/10ms) = 0			
RB numbers containing SSB within channel BW	$(RB_J, RB_{J+1}, \dots, RB_{J+19})^{\text{Note 1}}$			
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].				
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.				

A.3.10B SSB Configurations for RedCap

A.3.10B.1 SSB Configurations for FR1

A.3.10B.1.1 SSB pattern 1 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz in 20 MHz

Table A.3.10B.1.1-1: SSB.1 RedCap FR1: SSB Pattern 1 for SSB SCS=30 kHz in 20 MHz channel

SSB Parameters	Values
Channel bandwidth	20 MHz
SSB SCS	30 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB ^{Note 3}	4-7 or 2-5 ^{Note 2}
Slot numbers containing SSB ^{Note 3}	0
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSB within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+19}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen.	
Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves	

A.3.10B.1.2 SSB pattern 2 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz in 20 MHz

Table A.3.10B.1.2-1: SSB.2 RedCap FR1: SSB Pattern 2 for SSB SCS=30 kHz in 20 MHz channel

SSB Parameters		Values	
Channel bandwidth		20 MHz	
SSB SCS		30 kHz	
SSB periodicity (T_{SSB})		20 ms	
Number of SSBs per SS-burst		2	
SS/PBCH block index		0	1
Symbol numbers containing SSB ^{Note 3}		4-7 or 2-5 ^{Note 2}	8-11
Slot numbers containing SSB ^{Note 3}		0	0
SFN containing SSB		SFN mod (max(T_{SSB} ,10ms)/10ms) = 0	
RB numbers containing SSB within channel BW		(RB _J , RB _{J+1} ,..., RB _{J+19}) ^{Note 1}	
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].			
Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen.			
Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.			

A.3.10B.1.3 SSB pattern 3 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz starting from odd SFN in 20 MHz

Table A.3.10B.1.3-1: SSB.3 RedCap FR1: SSB Pattern 3 for SSB SCS=30 kHz in 20 MHz channel

SSB Parameters	Values
Channel bandwidth	20 MHz
SSB SCS	30 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB ^{Note 3}	4-7 or 2-5 ^{Note 2}
Slot numbers containing SSB ^{Note 3}	0
SFN containing SSB	SFN mod $(\max(T_{SSB}, 10\text{ms})/10\text{ms}) = 1$
RB numbers containing SSB within channel BW	$(RB_J, RB_{J+1}, \dots, RB_{J+19})$ ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen. Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10B.1.4 SSB pattern 4 for RedCap in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz

Table A.3.10B.1.4-1: SSB.4 RedCap FR1: SSB Pattern 4 for SSB SCS=15 kHz in 10 MHz channel

SSB Parameters	Values
Channel bandwidth	10 MHz
SSB SCS	15 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB ^{Note 2}	2-5
Slot numbers containing SSB ^{Note 2}	0
SFN containing SSB	SFN mod $(\max(T_{SSB}, 10\text{ms})/10\text{ms}) = 0$
RB numbers containing SSB within channel BW	$(RB_J, RB_{J+1}, \dots, RB_{J+19})$ ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10B.1.5 SSB pattern 5 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz in 20 MHz

Table A.3.10B.1.5-1: SSB.5 RedCap FR1: SSB Pattern 5 for SSB SCS=30 kHz in 20 MHz channel

SSB Parameters	Values
Channel bandwidth	20 MHz
SSB SCS	30 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0

Symbol numbers containing SSB ^{Note 3}	4-7 or 2-5 ^{Note 2}
Slot numbers containing SSB ^{Note 3}	0
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSB within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+19}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13]. Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen. Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves	

A.3.10B.1.6 SSB pattern 6 for RedCap in FR1: SSB allocation for SSB SCS=15 kHz in 10 MHz

Table A.3.10B.1.6-1: SSB.6 RedCap FR1: SSB Pattern 6 for SSB SCS=15 kHz in 10 MHz channel

SSB Parameters	Values
Channel bandwidth	10 MHz
SSB SCS	15 kHz
SSB periodicity (T_{SSB})	80 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB ^{Note 2}	2-5
Slot numbers containing SSB ^{Note 2}	0
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSB within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+19}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the associated bandwidth part except the RBs for allowed synchronization raster defined in TS 38.104 [13]. Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10B.1.7 SSB pattern 7 for RedCap in FR1: SSB allocation for SSB SCS=30 kHz in 20 MHz

Table A.3.10B.1.7-1: SSB.7 RedCap FR1: SSB Pattern 7 for SSB SCS=30 kHz in 40 MHz channel

SSB Parameters	Values
Channel bandwidth	20 MHz
SSB SCS	30 kHz
SSB periodicity (T_{SSB})	80 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSB ^{Note 3}	4-7 or 2-5 ^{Note 2}
Slot numbers containing SSB ^{Note 3}	0
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSB within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+19}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the associated bandwidth part except the RBs for allowed synchronization raster defined in TS 38.104 [13]. Note 2: Symbols 4-7 is chosen, if the SSB pattern Case B should be used for the current band as indicated by Table 5.4.3.3-1 of TS 38.104 [13]; Otherwise, symbol 2-5 is chosen.	

Note 3: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves

A.3.10B.2 SSB Configurations for FR2

A.3.10B.2.1 SSB pattern 1 for RedCap in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10B.2.1-1: SSB.1 RedCap FR2: SSB Pattern 1 for SSB SCS = 120 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	120 kHz
SSB periodicity (T_{SSB})	20 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSBs ^{Note 2}	4-7
Slot numbers containing SSB ^{Note 2}	0
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSBs within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+19}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the allowed synchronization raster defined in TS 38.104 [13].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10B.2.2 SSB pattern 2 for RedCap in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10B.2.2-1: SSB.2 RedCap FR2: SSB Pattern 2 for SSB SCS = 120 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	120 kHz
SSB periodicity (T_{SSB})	40 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSBs ^{Note 2}	4-7
Slot numbers containing SSB ^{Note 2}	0
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSBs within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+19}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the RBs for allowed synchronization raster defined in TS 38.104 [13].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10B.2.3 SSB pattern 3 for RedCap in FR2: SSB allocation for SSB SCS=120 kHz in 100 MHz

Table A.3.10B.2.3-1: SSB.3 RedCap FR2: SSB Pattern 3 for SSB SCS = 120 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	120 kHz
SSB periodicity (T_{SSB})	80 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSBs ^{Note 2}	4-7
Slot numbers containing SSB ^{Note 2}	0
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSBs within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+19}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the associated bandwidth part except the RBs for allowed synchronization raster defined in TS 38.104 [13].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10B.2.4 SSB pattern 4 for RedCap in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10B.2.4-1: SSB.4 RedCap FR2: SSB Pattern 4 for SSB SCS = 240 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	240 kHz
SSB periodicity (T_{SSB})	40 ms
Number of SSBs per SS-burst	1
SS/PBCH block index	0
Symbol numbers containing SSBs ^{Note 2}	8-11
Slot numbers containing SSB ^{Note 2}	0
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSBs within channel BW	($RB_J, RB_{J+1}, \dots, RB_{J+19}$) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the cell bandwidth according to the RBs for allowed synchronization raster defined in TS 38.104 [13].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.10B.2.5 SSB pattern 5 for RedCap in FR2: SSB allocation for SSB SCS=240 kHz in 100 MHz

Table A.3.10B.2.5-1: SSB.5 RedCap FR2: SSB Pattern 5 for SSB SCS = 240 kHz in 100 MHz channel with 1 SSB per SS-burst

SSB Parameters	Values
Channel bandwidth	100 MHz
SSB SCS	240 kHz
SSB periodicity (T_{SSB})	80 ms
Number of SSBs per SS-burst	1

SS/PBCH block index	0
Symbol numbers containing SSBs ^{Note 2}	8-11
Slot numbers containing SSB ^{Note 2}	0
SFN containing SSB	SFN mod ($\max(T_{SSB}, 10\text{ms})/10\text{ms}$) = 0
RB numbers containing SSBs within channel BW	(RB _J , RB _{J+1} , ..., RB _{J+19}) ^{Note 1}
Note 1: RBs containing SSB can be configured in any frequency location within the associated bandwidth part except the RBs for allowed synchronization raster defined in TS 38.104 [13].	
Note 2: These values have been derived from other parameters for information purposes (as per TS 38.213 [3]). They are not settable parameters themselves.	

A.3.11 SMTC Configurations

A.3.11.1 SMTC pattern 1: SMTC period = 20 ms with SMTC duration = 1 ms

Table A.3.11.1-1: SMTC.1: SMTC Pattern 1 for SMTC period = 20 ms and duration = 1 ms

SMTC Parameters	Values
SMTC periodicity	20 ms
SMTC offset	0 ms
SMTC duration	1 ms

A.3.11.2 SMTC pattern 2: SMTC period = 20 ms with SMTC duration = 5 ms

Table A.3.11.2-1: SMTC.2: SMTC Pattern 2 for SMTC period = 20 ms and duration = 5 ms

SMTC Parameters	Values
SMTC periodicity	20 ms
SMTC offset	0 ms
SMTC duration	5 ms

A.3.11.3 SMTC pattern 3: SMTC period = 160 ms with SMTC duration = 1 ms

Table A.3.11.3-1: SMTC.3: SMTC Pattern 3 for SMTC period = 160 ms and duration = 1 ms

SMTC Parameters	Values
SMTC periodicity	160 ms
SMTC offset	0 ms
SMTC duration	1 ms

A.3.11.4 SMTC pattern 4: SMTC period = 20 ms with SMTC duration = 1 ms

Table A.3.11.4-1: SMTC.4: SMTC Pattern 4 for SMTC period = 20 ms and duration = 1 ms

SMTC Parameters	Values
SMTC periodicity	20 ms
SMTC offset	10 ms

SMTC duration	1 ms
---------------	------

A.3.11.5 SMTC pattern 5: SMTC period = 20 ms with SMTC duration = 5 ms

Table A.3.11.5-1: SMTC.5: SMTC Pattern 5 for SMTC period = 20 ms and duration = 5 ms

SMTC Parameters	Values
SMTC periodicity	20 ms
SMTC offset	10 ms
SMTC duration	5 ms

A.3.11.6 SMTC pattern 6: SMTC period = 20 ms with SMTC duration = 5 ms

Table A.3.11.6-1: SMTC.6: SMTC Pattern 6 for SMTC period = 20 ms and duration = 5 ms

SMTC Parameters	Values
SMTC periodicity	20 ms
SMTC offset	17 ms
SMTC duration	5 ms

A.3.11.7 SMTC pattern 7: SMTC period = 20 ms with SMTC duration = 5 ms

Table A.3.11.7-1: SMTC.7: SMTC Pattern 7 for SMTC period = 20 ms and duration = 5 ms

SMTC Parameters	Values
SMTC periodicity	20 ms
SMTC offset	5 ms
SMTC duration	5 ms

A.3.11.8 SMTC pattern 8: SMTC period = 10 ms with SMTC duration = 1 ms

Table A.3.11.8-1: SMTC.8: SMTC Pattern 8 for SMTC period = 10 ms and duration = 1 ms

SMTC Parameters	Values
SMTC periodicity	10 ms
SMTC offset	0 ms
SMTC duration	1 ms

A.3.11.9 SMTC pattern 9: SMTC period = 20 ms with SMTC duration = 1 ms

Table A.3.11.9-1: SMTC.9: SMTC Pattern 6 for SMTC period = 20 ms and duration = 1 ms

SMTC Parameters	Values
SMTC periodicity	20 ms
SMTC offset	13 ms
SMTC duration	1 ms

A.3.11A SMTC Configurations for RedCap

A.3.11A.1 SMTC pattern 1 for RedCap: SMTC period = 40 ms with SMTC duration = 1 ms

Table A.3.11A.1-1: SMTC.1 RedCap: SMTC Pattern 1 for SMTC period = 40 ms and duration = 1 ms

SMTC Parameters	Values
SMTC periodicity	40 ms
SMTC offset	0 ms
SMTC duration	1 ms

A.3.11A.2 SMTC pattern 2 for RedCap: SMTC period = 80 ms with SMTC duration = 1 ms

Table A.3.11A.2-1: SMTC.2 RedCap: SMTC Pattern 2 for SMTC period = 80 ms and duration = 1 ms

SMTC Parameters	Values
SMTC periodicity	80 ms
SMTC offset	0 ms
SMTC duration	1 ms

A.3.11A.3 SMTC pattern 3 for RedCap: SMTC period = 40 ms with SMTC duration = 1 ms

Table A.3.11A.3-1: SMTC.3 RedCap: SMTC Pattern 3 for SMTC period = 40 ms and duration = 1 ms

SMTC Parameters	Values
SMTC periodicity	40 ms
SMTC offset	20 ms
SMTC duration	1 ms

A.3.11A.4 SMTC pattern 4 for RedCap: SMTC period = 80 ms with SMTC duration = 5 ms

Table A.3.11A.4-1: SMTC.4 RedCap: SMTC Pattern 4 for SMTC period = 80 ms and duration = 5 ms

SMTC Parameters	Values
SMTC periodicity	80 ms
SMTC offset	0 ms
SMTC duration	5 ms

A.3.12 Test Cases with Different CC Configurations

A.3.12.1 EN-DC Test Cases with Different EN-DC Configurations

A.3.12.1.1 Introduction

In Annex A EN-DC test cases may be defined for two component carriers (CCs) as well as for more than two CCs to verify the same RRM requirement.

A.3.12.1.2 Principle of testing

If multiple EN-DC test cases are defined for two CCs as well as for more than two CCs to verify the same type of RRM requirement, which depends on the number of CCs, then from the UE performance point of view the test coverage can be considered fulfilled by executing only the EN-DC test cases with the maximum number of CCs in EN-DC supported by the UE. Otherwise if the same type of RRM requirement is independent of the number of CCs then from the UE performance point of view the test coverage can be considered fulfilled by executing only the EN-DC test cases with two CCs in EN-DC supported by the UE.

Editor's: The maximum number of CCs that can be used in FR2 tests in EN-DC would depend on the test equipment capability.

A.3.12.2 Carrier Aggregation Test Cases with Different CA Configurations

A.3.12.2.1 Introduction

In Annex A carrier aggregation test cases may be defined for two CCs as well as for more than two CCs to verify the same RRM requirement.

A.3.12.2.2 Principle of testing

If multiple carrier aggregation test cases are defined for two CCs as well as for more than two CCs to verify the same RRM requirement, which depends on the number of CCs, then from the UE performance point of view the test coverage can be considered fulfilled by executing only the CA test cases with the maximum number of CCs in CA supported by the UE. Otherwise if the same type of RRM requirement is independent of the number of CCs then from the UE performance point of view the test coverage can be considered fulfilled by executing only the CA test cases with at least two CCs in CA supported by the UE.

Editor's: The maximum number of CCs that can be used in FR2 tests in CA would depend on the test equipment capability.

A.3.13 Test Cases in SA and EN-DC Operations

A.3.13.1 Introduction

This clause defines a principle which is applicable to test cases verifying RRM requirements in standalone (SA) or EN-DC operations.

In Annex A test cases may be defined in SA and EN-DC operations to verify the same RRM requirement.

Editor's note: this clause may need to define further for NE-DC and NR-DC test cases, which subjects to the test cases defined in the future.

A.3.13.2 Principle of Testing

If test cases are defined in both SA and EN-DC operations to verify the same RRM requirement then the UE capable of both SA and EN-DC operations needs to verify that RRM requirement by performing test case(s) in either SA operation or in EN-DC operation.

If test cases are defined in both SA and EN-DC operations to verify at least one common RRM requirement then the UE capable of both SA and EN-DC operations needs to verify RRM requirements by performing test case(s) in either SA operation or in EN-DC operation provided that the performed test case(s):

- verifies the largest number of RRM requirements and
- verifies at least all RRM requirements covered in the test case(s), which is not performed.

A.3.13A Test Cases involving E-UTRA/FR1 and FR2 carriers

A.3.13A.1 Introduction

The following applies to UE compliant to this version of the specification when undergoing tests with a mix of E-UTRA/NR FR1 and NR FR2 carriers in clauses A.5, A.7 and A.8.

A.3.13A.2 Principle of Testing in EN-DC

For test cases in clause A.5 listed in Table A.3.13A.2-1, the following applies:

- UE does not have to pass the test case.

Table A.3.13A.2-1: Test cases UE does not have to pass in current version of specification (EN-DC)

Clause	Test case slogan
A.5.3.3.1	Handover with PSCell with known FR2 target PSCell
A.5.5.2.7	E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching
A.5.5.3.2	SCell Activation and deactivation of known SCell in FR1 for 160ms SCell measurement cycle
A.5.5.3.5	SCell Activation and deactivation of SCell in FR2
A.5.5.3.6	Multiple SCell Activation and deactivation of one unknown SCell and one known SCell in FR2
A.5.5.3.9	PUCCH SCell Activation and deactivation of known SCell in FR2
A.5.5.3.10	PUCCH SCell Activation and deactivation of unknown SCell in FR2
A.5.5.3.11	Multiple SCell activation and deactivation of one known PUCCH SCell and one unknown SCell in FR2
A.5.5.3.12	SCell Activation and deactivation of unknown PUCCH SCell and unknown DL SCell in FR2 in non-DRX
A.5.5.6.1.2	E-UTRAN – NR PSCell FR2 with FR2 SCell DL active BWP switch in non-DRX in synchronous EN-DC
A.5.5.6.4.2	E-UTRAN – NR FR1 PSCell SCell dormancy switch of two FR2 SCells outside active time
A.5.5.13.2	E-UTRAN – NR FR2 interruptions during measurements on deactivated NR PSCell
A.5.6.2.5	EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is not used
A.5.6.2.6	EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is used
A.5.6.2.7	EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is not used
A.5.6.2.8	EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is used
A.5.7.1.3	EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR2 target cell

A.3.13A.3 Principle of Testing in SA

For test cases in clause A.7 listed in Table A.3.13A.3-1, the following applies:

- UE does not have to pass the test case.
- UE does not have to pass the test case.

Table A.3.13A.3-1: Test cases UE does not have to pass in current version of specification (SA)

Clause	Test case slogan
A.7.3.1.1	Inter-frequency handover from FR1 to FR2; unknown target cell
A.7.3.1.4	Inter-band inter-frequency synchronous DAPS handover from FR1 to FR2
A.7.3.1.5	Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR2
A.7.3.1.6	Handover with PSCell from SA to EN-DC; unknown FR2 target cell
A.7.3.1.7	HO with PSCell from FR1 NR-SA to EN-DC with known E-UTRA PCell and known FR2 PSCell
A.7.3.1.8	NR PSCell change delay in HO with PSCell from NR-DC to NR-DC
A.7.3.1.11	Inter-frequency handover from FR1 to FR2-2; unknown target cell
A.7.5.3.2	SCell Activation and deactivation for FR1+FR2 inter-band with target SCell in FR2
A.7.5.3.6	PUCCH SCell activation and deactivation for FR1+FR2 inter-band with target SCell in FR2 and known
A.7.5.3.7	PUCCH SCell activation and deactivation delay requirements of FR2 unknown cell with FR1 PCell
A.7.5.6.1.2	NR FR1- NR FR2 DL active BWP switch of PCell with non-DRX in SA
A.7.5.6.4.2	NR FR1 PCell SCell dormancy switch of two FR2 SCells outside active time
A.7.5.7.1	Addition and Release Delay of known NR PSCell
A.7.5.7.2	Addition and Release Delay of unknown NR PSCell
A.7.5.7.3	Addition and Release Delay of known NR PSCell in FR2-2
A.7.5.7.4	Addition and Release Delay of unknown NR PSCell in FR2-2
A.7.5.12.1	Addition and Release Delay of PSCell
A.7.5.14	PSCell RACH-less based Activation and deactivation for FR1+FR2 inter-band with target PSCell in FR2
A.7.6.2.5	SA event triggered reporting tests for FR2 without SSB time index detection when DRX is not used (PCell in FR1)
A.7.6.2.6	SA event triggered reporting tests for FR2 without SSB time index detection when DRX is used (PCell in FR1)
A.7.6.2.7	SA event triggered reporting tests for FR2 with SSB time index detection when DRX is not used (PCell in FR1)
A.7.6.2.8	SA event triggered reporting tests for FR2 with SSB time index detection when DRX is used (PCell in FR1)
A.7.6.2.16	SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is not used (PCell in FR1)
A.7.6.2.17	SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is used (PCell in FR1)
A.7.6.2.18	SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is not used (PCell in FR1)
A.7.6.2.19	SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is used (PCell in FR1)
A.7.6.3.6	Inter-cell SSB based L1-RSRP measurements on FR2 SCell when DRX is not used
A.7.7.1.3	SA inter-frequency measurement accuracy with FR1 serving cell and FR2 target cell

A.3.13A.4 Principle of Testing in E-UTRA

For test cases in clause A.8 listed in Table A.3.13A.4-1, the following applies:

- UE does not have to pass the test case.

Table A.3.13A.4-1: Test cases UE does not have to pass in current version of specification (E-UTRA)

Clause	Test case slogan
A.8.2.2.2	E-UTRA – NR Early Measurement Reporting for NR in FR2

A.8.4.2.5	NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is not used
A.8.4.2.6	NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is used
A.8.4.2.7	NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is not used
A.8.4.2.8	NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is used

A.3.13B Test Cases for EN-DC and NE-DC Operations

A.3.13B.1 Active BWP switch Test Cases for EN-DC and NE-DC Operations

A.3.13B.1.1 Introduction

This clause defines a principle which is applicable to test cases verifying active BWP switch requirements for EN-DC operation and NE-DC operations.

In Annex A test cases are defined for both EN-DC and NE-DC operations to verify the same type of RRM requirement.

A.3.13B.1.2 Principle of Testing

UE capable of both EN-DC and NE-DC operations needs to be tested with one of the tests in either EN-DC or NE-DC operations.

A.3.13B.2 SFTD accuracy Test Cases for EN-DC and NE-DC Operations

A.3.13B.2.1 Introduction

This clause defines a principle which is applicable to test cases verifying SFTD accuracy requirements for EN-DC operation and NE-DC operations.

In Annex A test cases are defined for both EN-DC and NE-DC operations to verify the same type of RRM requirement.

A.3.13B.2.2 Principle of Testing

UE capable of both EN-DC and NE-DC operations needs to be tested with one of the tests in either EN-DC or NE-DC operations.

A.3.14 CSI-RS configurations

A.3.14.1 FDD

Table A.3.14.1-1: CSI-RS Reference Measurement Channels for SCS=15kHz

	CSI-RS.1.1 FDD	CSI-RS.1.2 FDD	CSI- RS.1.3 FDD	CSI- RS.1.4 FDD	CSI- RS.1.5 FDD	CSI-RS.1.6 FDD	CSI-RS.1.7 FDD
Resource Type	periodic	periodic	aperiodic	aperiodic	aperiodic	periodic	periodic

Resource Set Config							
nzp-CSI-ResourceSetId	0	0	0	0	0	0	0
repetition	n.a.	off	off	on	off	n.a.	off
aperiodicTriggeringOffset	n.a.	n.a.	0	0	0	n.a.	n.a.
trs-Info	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
Resource Config							
nzp-CSI-RS-ResourceId	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	2 for resource #0
				1 for resource #1			
				2 for resource #2			
				3 for resource #3			
		1 for resource #1	1 for resource #1	4 for resource #4	1 for resource #1		3 for resource #1
				5 for resource #5			
				6 for resource #6			
				7 for resource #7			
powerControlOffset	0	0	0	0	0	0	0
powerControlOffsetSS	db0	db0	db0	db0	db0	db0	db0
scramblingID	0	0	0	0	0	0	0
Period (slots)	slot5	slot10	n.a.	n.a.	n.a.	slot40	slot10
Offset	1	1	n.a.	n.a.	n.a.	1	1
qcl-InfoPeriodicCSI-RS	TCI.State.0	TCI.State.0	n.a.	n.a.	n.a.	TCI.State.0	TCI.State.0
		TCI.State.1					TCI.State.1
frequencyDomainAllocation	000001	0001	0001	0001	000001	000001	0100
nrofPorts	2	1	1	1	1	2	1
firstOFDMSymbolInTimeDomain	4 for resource #0	6 for resource #0	6 for resource #0	0 for resource #0	Specified in the test case for resource #0	5 for resource #0	6 for resource #0
				1 for resource #1			
				2 for resource #2			
				3 for resource #3			
		10 for resource #1	10 for resource #1	4 for resource #4	n.a.		10 for resource #1
5 for resource #5							

				6 for resource #6			
				7 for resource #7			
cdm-Type	FD-CDM2	noCDM	noCDM	noCDM	noCDM	FD-CDM2	noCDM
density	1	3	3	3	3	1	3
startingRB	0	0	0	0	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.							

A.3.14.2 TDD

Table A.3.14.2-1: CSI-RS Reference Measurement Channels for SCS=15kHz

	CSI-RS.1.1 TDD	CSI-RS.1.2 TDD	CSI-RS.1.3 TDD	CSI-RS.1.4 TDD	CSI-RS.1.5 TDD	CSI-RS.1.6 TDD
Resource Type	periodic	periodic	aperiodic	aperiodic	periodic	periodic
Resource Set Config						
nzp-CSI-ResourceSetId	0	0	0	0	0	0
repetition	n.a.	off	off	on	n.a.	off
aperiodicTriggeringOffset	n.a.	n.a.	0	0	n.a.	n.a.
trs-Info	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
Resource Config						
nzp-CSI-RS-ResourceId	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	2 for resource #0
				1 for resource #1		
				2 for resource #2		
				3 for resource #3		
		1 for resource #1	1 for resource #1	4 for resource #4		3 for resource #1
				5 for resource #5		
				6 for resource #6		
				7 for resource #7		
powerControlOffset	0	0	0	0	0	0
powerControlOffsetSS	db0	db0	db0	db0	db0	db0
scramblingID	0	0	0	0	0	0
Period (slots)	slot5	slot10	n.a.	n.a.	slot40	slot10
Offset	1	1	n.a.	n.a.	1	1
qcl-InfoPeriodicCSI-RS	TCI.State.0	TCI.State.0 TCI.State.1	n.a.	n.a.	TCI.State.0	TCI.State.0 TCI.State.1
frequencyDomainAllocation	000001	0001	0001	0001	000001	0100
nrofPorts	2	1	1	1	2	1
		6 for resource #0	6 for resource #0	0 for resource #0		6 for resource #0
				1 for resource #1		
				2 for resource #2		

firstOFDMSymbolInTimeDomain	4 for resource #0	10 for resource #1	10 for resource #1	3 for resource #3	5 for resource #0	10 for resource #1
				4 for resource #4		
				5 for resource #5		
				6 for resource #6		
				7 for resource #7		
cdm-Type	FD-CDM2	noCDM	noCDM	noCDM	FD-CDM2	noCDM
density	1	3	3	3	1	3
startingRB	0	0	0	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.						

Table A.3.14.2-1A: CSI-RS Reference Measurement Channels for SCS=15kHz

	CSI-RS.1.1A TDD	CSI-RS.1.2A TDD	CSI-RS.1.3A TDD
Resource Type	periodic	aperiodic	periodic
Resource Set Config			
nzp-CSI-ResourceSetId	1	1	1
repetition	off	off	off
aperiodicTriggeringOffset	n.a.	0	n.a.
trs-Info	n.a.	n.a.	n.a.
Resource Config			
nzp-CSI-RS-ResourceId	12 for resource #0	22 for resource #0	14 for resource #0
	13 for resource #1	23 for resource #1	15 for resource #1
powerControlOffset	0	0	0
powerControlOffsetSS	db0	db0	db0
scramblingID	0	0	0
Period (slots)	slot20	n.a.	slot10
Offset	1	n.a.	2
qcl-InfoPeriodicCSI-RS	n.a.	n.a.	n.a.
frequencyDomainAllocation	0001	0001	0001
nrofPorts	1	1	1
firstOFDMSymbolInTimeDomain	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
cdm-Type	noCDM	noCDM	noCDM
density	3	3	3
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)

Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.

Table A.3.14.2-2: CSI-RS Reference Measurement Channels for SCS=30kHz

	CSI-RS.2.1 TDD	CSI-RS.2.2 TDD	CSI-RS.2.3 TDD	CSI-RS.2.4 TDD	CSI-RS.2.5 TDD	CSI-RS.2.6 TDD	CSI-RS.2.7 TDD	
Resource Type	periodic	periodic	aperiodic	aperiodic	aperiodic	periodic	periodic	
Resource Set Config								
nzp-CSI-ResourceSetId	0	0	0	0	0	0	0	
repetition	n.a.	off	off	on	off	n.a.	off	
aperiodicTriggeringOffset	n.a.	n.a.	0	0	0	n.a.	n.a.	
trs-Info	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	
Resource Config								
nzp-CSI-RS-ResourceId	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	2 for resource #0	
		1 for resource #1	1 for resource #1	1 for resource #1	1 for resource #1		3 for resource #1	
				2 for resource #2				
				3 for resource #3				
				4 for resource #4				
				5 for resource #5				
				6 for resource #6				
				7 for resource #7				
powerControlOffset	0	0	0	0	0	0	0	
powerControlOffsetSS	db0	db0	db0	db0	db0	db0	db0	
scramblingID	0	0	0	0	0	0	0	
Period (slots)	slot10	slot20	n.a.	n.a.	n.a.	slot80	slot20	
Offset	2	2	n.a.	n.a.	n.a.	2	2	
qcl-InfoPeriodicCSI-RS	TCI.State.0	TCI.State.0 TCI.State.1	n.a.	n.a.	n.a.	TCI.State.0	TCI.State.0 TCI.State.1	
frequencyDomainAllocation	000001	0001	0001	0001	000001	000001	0100	
nrofPorts	2	1	1	1	1	2	1	
firstOFDMSymbolInTimeDomain	5 for resource #0	6 for resource #0	6 for resource #0	0 for resource #0	Specified in the test case for resource #0	5 for resource #0	6 for resource #0	
		10 for resource #1	10 for resource #1	1 for resource #1			n.a.	10 for resource #1
				2 for resource #2				
				3 for resource #3				
				4 for resource #4				
				5 for resource #5				
				6 for resource #6				
				7 for resource #7				
cdm-Type	FD-CDM2	noCDM	noCDM	noCDM	noCDM	FD-CDM2	noCDM	

density	1	3	3	3	3	1	3
startingRB	0	0	0	0	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.							

Table A.3.14.2-2A: CSI-RS Reference Measurement Channels for SCS=30kHz

	CSI-RS.2.1A TDD	CSI-RS.2.2A TDD	CSI-RS.2.3A TDD
Resource Type	periodic	aperiodic	periodic
Resource Set Config			
nzp-CSI-ResourceSetId	1	1	1
repetition	off	off	off
aperiodicTriggeringOffset	n.a.	0	n.a.
trs-Info	n.a.	n.a.	n.a.
Resource Config			
nzp-CSI-RS-ResourceId	12 for resource #0	22 for resource #0	14 for resource #0
	13 for resource #1	23 for resource #1	15 for resource #1
powerControlOffset	0	0	0
powerControlOffsetSS	db0	db0	db0
scramblingID	0	0	0
Period (slots)	slot40	n.a.	slot20
Offset	2	n.a.	4
qcl-InfoPeriodicCSI-RS	n.a.	n.a.	n.a.
frequencyDomainAllocation	0001	0001	0001
nrofPorts	1	1	1
firstOFDMSymbolInTimeDomain	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
cdm-Type	noCDM	noCDM	noCDM
density	3	3	3
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.			

Table A.3.14.2-3: CSI-RS Reference Measurement Channels for SCS=120kHz

	CSI-RS.3.1 TDD	CSI-RS.3.2 TDD	CSI-RS.3.3 TDD	CSI-RS.3.4 TDD	CSI-RS.3.5 TDD	CSI-RS.3.6 TDD
Resource Type	periodic	periodic	aperiodic	aperiodic	periodic	periodic
Resource Set Config						
nzp-CSI-ResourceSetId	0	0	0	0	0	0

repetition	n.a.	off	off	on	n.a.	off
aperiodicTriggeringOffset	n.a.	n.a.	4	4	n.a.	n.a.
trs-Info	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
Resource Config						
nzp-CSI-RS-ResourceId	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	0 for resource #0	2 for resource #0
		1 for resource #1	1 for resource #1	1 for resource #1		3 for resource #1
				2 for resource #2		
				3 for resource #3		
				4 for resource #4		
				5 for resource #5		
				6 for resource #6		
				7 for resource #7		
powerControlOffset	0	0	0	0	0	0
powerControlOffsetSS	db0	db0	db0	db0	db0	db0
scramblingID	0	0	0	0	0	0
Period (slots)	slot40	slot80	n.a.	n.a.	slot320	slot80
Offset	8	16	n.a.	n.a.	8	16
qcl-InfoPeriodicCSI-RS	TCI.State.0	TCI.State.0 TCI.State.1	n.a.	n.a.	TCI.State.0	TCI.State.0 TCI.State.1
frequencyDomainAllocation	000001	0001	0001	0001	000001	0100
nrofPorts	2	1	1	1	1	1
firstOFDMSymbolInTimeDomain	5 for resource #0	6 for resource #0	6 for resource #0	0 for resource #0	5 for resource #0	6 for resource #0
		10 for resource #1	10 for resource #1	1 for resource #1		10 for resource #1
				2 for resource #2		
				3 for resource #3		
				4 for resource #4		
				5 for resource #5		
				6 for resource #6		
				7 for resource #7		
cdm-Type	FD-CDM2	noCDM	noCDM	noCDM	FD-CDM2	noCDM
density	1	3	3	3	1	3
startingRB	0	0	0	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.						

Table A.3.14.2-3A: CSI-RS Reference Measurement Channels for SCS=120kHz

	CSI-RS.3.1A TDD	CSI-RS.3.2A TDD	CSI-RS.3.3A TDD
Resource Type	periodic	aperiodic	periodic
Resource Set Config			
nzp-CSI-ResourceSetId	1	1	1
repetition	off	off	off

aperiodicTriggeringOffset	n.a.	6	n.a.
trs-Info	n.a.	n.a.	n.a.
Resource Config			
nzp-CSI-RS-ResourceId	12 for resource #0	22 for resource #0	14 for resource #0
	13 for resource #1	23 for resource #1	15 for resource #1
powerControlOffset	0	0	0
powerControlOffsetSS	db0	db0	db0
scramblingID	0	0	0
Period (slots)	slot160	n.a.	slot80
Offset	8	n.a.	16
qcl-InfoPeriodicCSI-RS	n.a.	n.a.	n.a.
frequencyDomainAllocation	0001	0001	0001
nrofPorts	1	1	1
firstOFDMSymbolInTimeDomain	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
cdm-Type	noCDM	noCDM	noCDM
density	3	3	3
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the Test Equipment shall implement CSI-RS only in the width of that BWP.			

A.3.15 Angle of Arrival (AoA) for FR2 RRM test cases

This clause specifies the AoA setups for FR2 RRM test cases in clause A.5 and A.7. The applicable AoA setup is defined in each test case in clause A.5 and A.7.

A.3.15.1 Setup 1: Single AoA in Rx beam peak direction

There is only one active probe in the test. The DL signals, and noise if applicable, transmitted from the probe, are aligned to the UE Rx beam peak direction (as defined in TS 38.101-2 [19]).

A.3.15.2 Setup 2: Single AoA in non Rx beam peak direction

A.3.15.2.1 Setup 2a: Single AoA in non Rx beam peak direction without change in direction

There is only one active probe in the test. The DL signals, and noise if applicable, transmitted from the probe, align to a direction (AoA) which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [19] for each UE power class. The direction (AoA) of the signals shall not be changed between test iterations.

A.3.15.2.2 Setup 2b: Single AoA in non Rx beam peak direction with change in direction

There is only one active probe in the test. The DL signals, and noise if applicable, transmitted from the probe, align to a direction (AoA) which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [19] for each UE power class. For UE power class 3, the direction (AoA) of the signals shall be changed for each test iteration (for UE power classes other than 3, this is FFS).

A.3.15.3 Setup 3: 2 AoAs

There are 2 active probes in the test. The DL signals, and noise if applicable, transmitted from the two active probes, align to directions (AoAs) which are from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [19] for each UE power class. The relative angular offset between the directions (AoAs) of the 2 active probes, shall be changed for each test iteration. The applicable set of relative angular offsets between the 2 active probes is given in Table 3.15.3-1 for each UE power class.

Editor Note: If RAN5 finds the changing of angular offset between the directions (AoAs) of the 2 active probes per test iteration to be infeasible from the perspectives of EIS spherical coverage and other impacts, e.g.: testing time, then the test setup will be revised.

Table A.3.15.3-1: Set of relative angular offsets between active probes for each power class

UE Power class	Relative angular offset between active probes
1	30°, 60°, 90° and 120°
2	FFS
3	30°, 60°, 90°, 120° and 150°
4	FFS
5	30°, 60°, 90° and 120°
6	30°, 60°, 90°, 120° and 150°
7	FFS

A.3.15.4 Setup 4: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak

A.3.15.4.1 Setup 4a: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak without change in direction

There are 2 active probes in the test. The DL signals, and noise if applicable, are transmitted from the two active probes. One probe is aligned to the UE Rx beam peak direction as defined in TS 38.101-2 [19]. The second is aligned to a direction (AoA) which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [19] for each UE power class. The direction (AoA) of the non Rx beam peak signal shall not be changed between test iterations.

A.3.15.4.2 Setup 4b: 2 AoAs, 1 AoA in Rx beam peak direction, 1 in non Rx beam peak with change in direction

There are 2 active probes in the test. The DL signals, and noise if applicable, are transmitted from the two active probes. One probe is aligned to the UE Rx beam peak direction as defined in TS 38.101-2 [19]. The second is aligned to a direction (AoA) which is from the set of directions corresponding to the EIS spherical coverage percentile of the DUT as defined in clause 7.3.4 of TS 38.101-2 [19] for each UE power class.

For UE power class 3, the relative angular offset between the directions (AoAs) of the 2 active probes shall be changed for each test iteration, within the probe alignment described above. The applicable set of relative angular offsets between the 2 active probes is given in Table 3.15.3-1 for each UE power class.

A.3.16 TCI State Configuration

A.3.16.1 Introduction

This clause provides the configurations for TCI states towards either SSB or CSI-RS. The TCI states defined in this clause are configured in each test when applicable to indicate that certain DL signals are QCL'ed with the referenceSignal configured in the TCI states.

A.3.16.2 TCI states

Table A.3.16.2-1: TCI States

Parameter	TCI.State.0	TCI.State.1	TCI.State.2	TCI.State.3
tci-StateId	Id0	Id1	Id2	Id3
qcl-Type1	typeC	typeC	typeA	typeA
qcl-Type2 ^{Note1}	typeD	typeD	typeD	typeD
referenceSignal	SSB0	SSB1	Resource #4 in TRS resource set 1 ^{Note3}	Resource #4 in TRS resource set 2 ^{Note3}
Note 1: qcl-Type2 of typeD only where applicable. For RRM test cases, this will be only in FR2 Note 2: referenceSignal configurations towards which the TCI states are configured are defined in a test-specific manner. Note 3: Reference TRS resource sets are defined in A.3.17, and the applicable TRS resource set(s) are specified in each test case. When a single TRS resource set is configured in a test case, it is considered as resource set 1.				

Table A.3.16.2-2: Void

A.3.16A Unified TCI State Configuration

A.3.16A.1 Introduction

This clause provides the configurations for unified TCI states towards either SSB or CSI-RS. The DLorJoint TCI states defined in this clause are configured in each test when applicable to indicate that certain DL (and UL, if joint DL/UL operation is configured) signals are QCL'ed with the referenceSignal configured in the TCI states. The UL TCI states defined in this clause are configured in each test when applicable to indicate that certain UL signals are QCL'ed with the referenceSignal configured in the TCI states.

A.3.16A.2 DLorJoint TCI states

Table A.3.16A.2-1: DLorJoint TCI States

Parameter	DLorJoint TCI.State.0	DLorJoint TCI.State.1	DLorJoint TCI.State.2	DLorJoint TCI.State.3	DLorJoint TCI.State.4	DLorJoint TCI.State.5
tci-StateUnifiedId	Id0	Id1	Id2	Id3	Id4	Id5
qcl-Type1	typeA	typeA	typeA	typeA	typeC	typeC
qcl-Type2 ^{Note1}	typeD	typeD	typeD	typeD	typeD	typeD
referenceSignal ^{Note2}	Resource #4 in TRS resource set 1 ^{Note3}	Resource #4 in TRS resource set 2 ^{Note5}	Resource #4 in TRS resource set 1 ^{Note3}	Resource #4 in TRS resource set 2 ^{Note3}	SSB0	SSB1 from the cell with different PCI
pathlossReferenceRS	N/A	N/A	Resource #4 in TRS	Resource #4 in TRS	N/A	N/A

			resource set 1 ^{Note3}	resource set 1 ^{Note3}		
additionalPCI	N/A	configured ^{Note4}	N/A	N/A	N/A	configured ^{Note4}
Note 1: qcl-Type2 of typeD only where applicable. For RRM test cases, this will be only in FR2 Note 2: referenceSignal configurations towards which the TCI states are configured are defined in a test-specific manner. Note 3: Reference TRS resource sets are defined in A.3.17, and the applicable TRS resource set(s) are specified in each test case. When a single TRS resource set is configured in a test case, it is considered as resource set 1. The TCI state of the TRS is the DLorJoint TCI.State.4. Note 4: Only one PCI than serving cell PCI is included in the additionalPCIList, and the additionalPCIIndex is configured as 0. Note 5: Reference TRS resource sets are defined in A.3.17, and the applicable TRS resource set(s) are specified in each test case. When a single TRS resource set is configured in a test case, it is considered as resource set 1. The TCI state of the TRS is the DLorJoint TCI.State.5.						

A.3.16A.3 UL TCI states

Table A.3.16A.3-1: UL TCI States

Parameter	UL TCI.State.0	UL TCI.State.1	UL TCI.State.2	UL TCI.State.3
ul-TCIState-Id	Id0	Id1	Id2	Id3
referenceSignal ^{Note1}	SSB0	SSB1	Resource #4 in TRS resource set 1 ^{Note2}	Resource #4 in TRS resource set 2 ^{Note2}
pathlossReferenceRS	Resource #4 in TRS resource set 1 ^{Note2}	Resource #4 in TRS resource set 1 ^{Note2}	Resource #4 in TRS resource set 1 ^{Note2}	Resource #4 in TRS resource set 2 ^{Note2}
additionalPCI	N/A	configured ^{Note3}	N/A	N/A
Note 1: referenceSignal configurations towards which the UL TCI states are configured are defined in a test-specific manner. Note 2: Reference TRS resource sets are defined in A.3.17, and the applicable TRS resource set(s) are specified in each test case. When a single TRS resource set is configured in a test case, it is considered as resource set 1. Note 3: Only one PCI than serving cell PCI is included in the additionalPCIList, and the additionalPCIIndex is configured as 0.				

A.3.17 Configurations of CSI-RS for tracking

A.3.17.1 Configuration of CSI-RS for tracking for FR1

A.3.17.1.1 FDD

Table A.3.17.1.1-1: CSI-RS for tracking for SCS=15kHz

Parameter	Unit	Value
Reference channel		TRS.1.1 FDD
Bandwidth		BW of Active BWP ^{Note 1}
SCS	kHz	15
First subcarrier index in the PRB used for CSI-RS		k ₀ =0 for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		l ₀ = 5 for CSI-RS resource 1 and 3 l ₀ = 9 for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
CSI-RS periodicity	slots	20 for CSI-RS resource 1,2,3,4
CSI-RS offset	slots	10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4

EPRE ratio to SSS	dB	0 ^{Note 2}
TCI state		TCI.State.0
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases		
Note 2: Unless otherwise specified in the test case		

Table A.3.17.1.1-2: CSI-RS for tracking for SCS=30kHz

Parameter	Unit	Value
Reference channel		TRS.1.2 FDD
Bandwidth		BW of Active BWP ^{Note 1}
SCS	kHz	30
First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
CSI-RS periodicity	slots	40 for CSI-RS resource 1,2,3,4
CSI-RS offset	slots	20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 ^{Note 2}
TCI state		TCI.State.0
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases		
Note 2: Unless otherwise specified in the test case		

Table A.3.17.1.1-3: Aperiodic CSI-RS for tracking for SCS=15kHz

Parameter	Unit	Value
Reference channel		TRS.1.3 FDD
Bandwidth		BW of Active BWP ^{Note 1}
SCS	kHz	15
First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
aperiodicTriggeringOffsetL2	slots	2
Aperiodic CSI-RS offset	slots	2 for CSI-RS resource 1 and 2 3 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 ^{Note 2}
TCI state		TCI.State.0
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases		
Note 2: Unless otherwise specified in the test case		

Table A.3.17.1.1-4: Aperiodic CSI-RS for tracking for SCS=30kHz

Parameter	Unit	Value
Reference channel		TRS.1.4 FDD
Bandwidth		BW of Active BWP ^{Note 1}
SCS	kHz	30
First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resource 1,2,3,4

First OFDM symbol in the slot used for CSI-RS		$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
aperiodicTriggeringOffsetL2	slots	2
Aperiodic CSI-RS offset	slots	2 for CSI-RS resource 1 and 2 3 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 ^{Note 2}
TCI state		TCI.State.0
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases		
Note 2: Unless otherwise specified in the test case		

A.3.17.1.2 TDD

Table A.3.17.1.2-1: CSI-RS for tracking for SCS=15kHz

Parameter	Unit	Value
Reference channel		TRS.1.1 TDD
Bandwidth		BW of Active BWP ^{Note 1}
SCS	kHz	15
First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
CSI-RS periodicity	slots	20 for CSI-RS resource 1,2,3,4
CSI-RS offset	slots	10 for CSI-RS resource 1 and 2 11 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 ^{Note 2}
TCI state		TCI.State.0
Note: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases		

Table A.3.17.1.2-2: CSI-RS for tracking for SCS=30kHz

Parameter	Unit	Value
Reference channel		TRS.1.2 TDD
Bandwidth		BW of Active BWP ^{Note 1}
SCS	kHz	30
First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
CSI-RS periodicity	slots	40 for CSI-RS resource 1,2,3,4
CSI-RS offset	slots	20 for CSI-RS resource 1 and 2 21 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 ^{Note 2}
TCI state		TCI.State.0
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases		
Note 2: Unless otherwise specified in the test case		

Table A.3.17.1.2-3: Aperiodic CSI-RS for tracking for SCS=15kHz

Parameter	Unit	Value
Reference channel		TRS.1.3 TDD
Bandwidth		BW of Active BWP ^{Note 1}
SCS	kHz	15
First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
aperiodicTriggeringOffsetL2	slots	2
Aperiodic CSI-RS offset	slots	2 for CSI-RS resource 1 and 2 3 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 ^{Note 2}
TCI state		TCI.State.0
Note: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases		

Table A.3.17.1.2-4: Aperiodic CSI-RS for tracking for SCS=30kHz

Parameter	Unit	Value
Reference channel		TRS.1.4 TDD
Bandwidth		BW of Active BWP ^{Note 1}
SCS	kHz	30
First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		$l_0 = 5$ for CSI-RS resource 1 and 3 $l_0 = 9$ for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
aperiodicTriggeringOffsetL2	slots	2
Aperiodic CSI-RS offset	slots	2 for CSI-RS resource 1 and 2 3 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 ^{Note 2}
TCI state		TCI.State.0
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases		
Note 2: Unless otherwise specified in the test case		

A.3.17.2 Configuration of CSI-RS for tracking for FR2

A.3.17.2.1 TDD

Table A.3.17.2.1-1: CSI-RS for tracking for SCS=120kHz Set 1

Parameter	Unit	Value
Reference channel		TRS.2.1 TDD
Bandwidth		BW of Active BWP ^{Note 1,3}
SCS	kHz	120
First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		$l_0 = 1$ for CSI-RS resource 1 and 3 $l_0 = 5$ for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4

CSI-RS periodicity	slots	80 for CSI-RS resource 1,2,3,4
CSI-RS offset	slots	40 for CSI-RS resource 1 and 2 41 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 ^{Note 2}
TCI state		TCI.State.0 ^{Note 4}
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases		
Note 2: Unless otherwise specified in the test case		
Note 3: If active BWP is larger than 52RBs, BW of TRS is configured as 52RBs. Otherwise, same as active BWP size.		
Note 4: If unified TCI states are configured, the TCI state ID is defined in each test case and from A.3.16A Unified TCI state Configuration		

Table A.3.17.2.1-2: CSI-RS for tracking for SCS=120kHz Set 2

Parameter	Unit	Value
Reference channel		TRS.2.2 TDD
Bandwidth		BW of Active BWP ^{Note 1,3}
SCS	kHz	120
First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		$l_0 = 2$ for CSI-RS resource 1 and 3 $l_0 = 6$ for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
CSI-RS periodicity	slots	80 for CSI-RS resource 1,2,3,4
CSI-RS offset	slots	40 for CSI-RS resource 1 and 2 41 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 ^{Note 2}
TCI state		TCI.State.1 ^{Note 4}
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases		
Note 2: Unless otherwise specified in the test case		
Note 3: If active BWP is larger than 52RBs, BW of TRS is configured as 52RBs. Otherwise, same as active BWP size.		
Note 4: If unified TCI states are configured, the TCI state ID is defined in each test case and from A.3.16A Unified TCI state Configuration		

Table A.3.17.2.1-3: Aperiodic CSI-RS for tracking for SCS=120kHz Set 1

Parameter	Unit	Value
Reference channel		TRS.2.3 TDD
Bandwidth		BW of Active BWP ^{Note 1,3}
SCS	kHz	120
First subcarrier index in the PRB used for CSI-RS		$k_0=0$ for CSI-RS resource 1,2,3,4
First OFDM symbol in the slot used for CSI-RS		$l_0 = 1$ for CSI-RS resource 1 and 3 $l_0 = 5$ for CSI-RS resource 2 and 4
Number of CSI-RS ports (X)		1 for CSI-RS resource 1,2,3,4
CDM Type		'No CDM' for CSI-RS resource 1,2,3,4
Density (ρ)		3 for CSI-RS resource 1,2,3,4
aperiodicTriggeringOffsetL2	slots	2
Aperiodic CSI-RS offset	slots	2 for CSI-RS resource 1 and 2 3 for CSI-RS resource 3 and 4
EPRE ratio to SSS	dB	0 ^{Note 2}
TCI state		TCI.State.0
Note 1: BW of TRS is configured same as the BW size of UE active BWP in the RRM test cases		
Note 2: Unless otherwise specified in the test case		

Note 3: If active BWP is larger than 52RBs, BW of TRS is configured as 52RBs. Otherwise, same as active BWP size.

A.3.18 Additional definitions related to OTA testing for FR2 RRM test cases

A.3.18.1 Introduction

FR2 RRM test cases are performed over the air (OTA). This clause provides additional definitions and clarifications on the OTA measurements and metrics defined or referred in the test cases.

A.3.18.2 PRACH Power Measurement

PRACH power is measured as EIRP(Link=Link angle, Meas=Link angle) as defined in clause 3.1 of TS 38.101-2 [19].

A.3.19 Test applicability for DAPS handover

A.3.19.1 Introduction

In Annex A test cases for DAPS handover may be defined with cells in on same or different carrier frequency to verify intra-frequency, intra-band inter-frequency and inter-band inter-frequency DAPS handover RRM requirements, respectively.

A.3.19.2 Principle of testing

To verify intra-frequency DAPS handover requirements

- The UE capable of intra-frequency asynchronous DAPS handover on any band needs to be tested only in asynchronous scenario.
- The UE not capable of intra-frequency asynchronous DAPS handover on any band but capable of synchronous DAPS handover on some band needs to be tested only in synchronous scenario.

To verify intra-band inter-frequency DAPS handover requirements

- The UE capable of intra-band inter-frequency asynchronous DAPS handover on any band needs to be tested only in asynchronous scenario.
- The UE not capable of intra-band inter-frequency asynchronous DAPS handover on any band but capable of intra-band inter-frequency synchronous DAPS handover on some band needs to be tested only in synchronous scenario.

To verify inter-band inter-frequency DAPS handover requirements

- The UE capable of inter-band inter-frequency asynchronous DAPS handover on any band combination needs to be tested only in asynchronous scenario.
- The UE not capable of inter-band inter-frequency asynchronous DAPS handover on any band combination but capable of inter-band inter-frequency synchronous DAPS handover on some band combination needs to be tested only in synchronous scenario.

A.3.20 MsgA configurations

A.3.20.1 Introduction

This clause provides the typical PRACH and PUSCH configurations for MsgA used for RRM test cases defined in Annex A. To note that for other parameters not listed in this clause, either it can be derived from the set up of each test or it is subjected to RAN5 specifications.

A.3.20.2 MsgA configurations in FR1

A.3.20.2.1 FR1 MsgA configuration 1

FR1 MsgA configuration 1 in this clause provides the typical MsgA configuration for SSB-based contention based random access for 2-step RA type in FR1.

Table A.3.20.2.1-1: Parameters for FR1 MsgA configuration 1

Field	Value	Comment
msgA-prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msgA-SubcarrierSpacing	Same as UL carrier SCS	
msgA-totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
msgA-PRACH-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
msgA-SSB-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention based preambles per SSB
msgA-RO-FDM	One	One PRACH transmission occasions FDMed in one time instance.
ra-ContentionResolutionTimer	sf48	48 sub-frames
msgA-PreamblePowerRampingStep	dB2	
msgA-PreambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
msgB-ResponseWindow	sl10	10 slots
msgA-ZeroCorrelationZoneConfig	11	N-CS configuration, $N_{cs} = 23$
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
msgA-MCS	1	MCS index for MsgA PUSCH
nrofSlotsMsgA-PUSCH	1	Number of slots containing one or multiple PUSCH occasions
nrofMsgA-PO-PerSlot	1	Number of time domain PUSCH occasions in each slot
msgA-PUSCH-TimeDomainOffset	1	A single time offset with respect to the start of each PRACH slot, counted as the number of slots
PUSCH start symbol	0	
PUSCH allocation length	14	
mappingTypeMsgA-PUSCH	typeA	
nrofPRBs-PerMsgA-PO	2	Number of RBs per PUSCH occasion
nrofMsgA-PO-FDM	One	The number of MsgA PUSCH occasions FDMed in one time instance
msgA-DMRS-AdditionalPosition	pos1	Position for additional DM-RS
msgA-PUSCH-NrofPorts	1	Configure 1 port per CDM group

msgA-DeltaPreamble	2dB	Power offset of msgA PUSCH relative to the preamble received target power
msgA-Alpha	alpha1	Alpha value for MsgA PUSCH. Set 1
deltaMCS	Disabled	Whether to apply delta MCS
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.20.2.2 FR1 MsgA configuration 2

FR1 PRACH configuration 2 in this clause provides the typical MsgA configuration for SSB based non-contention based random access for 2-step RA type in FR1.

Table A.3.20.2.2-1: Parameters for FR1 MsgA configuration 2

Field	Value	Comment
msgA-prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msgA-SubcarrierSpacing	Same as UL carrier SCS	
msgA-totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
msgA-PRACH-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msgA-RO-FDM	One	One PRACH transmission occasions FDMed in one time instance.
msgA-PreamblePowerRampingStep	dB2	
msgA-PreambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
msgB-ResponseWindow	sl10	10 slots
msgA-ZeroCorrelationZoneConfig	11	N-CS configuration, $N_{cs} = 23$
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
ssb-ResourceList	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.
BFR-SSB-Resource	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
ra-ssb-OccasionMaskIndex	1	PRACH occasion index 1 is allowed
msgA-MCS	1	MCS index for MsgA PUSCH
nrofSlotsMsgA-PUSCH	1	Number of slots containing one or multiple PUSCH occasions
nrofMsgA-PO-PerSlot	1	Number of time domain PUSCH occasions in each slot
msgA-PUSCH-TimeDomainOffset	1	A single time offset with respect to the start of each PRACH slot, counted as the number of slots
PUSCH start symbol	0	

PUSCH allocation length	14	
mappingTypeMsgA-PUSCH	typeA	
nrofPRBs-PerMsgA-PO	2	Number of RBs per PUSCH occasion
nrofMsgA-PO-FDM	One	The number of MsgA PUSCH occasions FDMed in one time instance
msgA-DMRS-AdditionalPosition	pos1	Position for additional DM-RS
msgA-PUSCH-NrofPorts	1	Configure 1 port per CDM group
msgA-DeltaPreamble	2dB	Power offset of msgA PUSCH relative to the preamble received target power
msgA-Alpha	alpha1	Alpha value for MsgA PUSCH. Set 1
deltaMCS	Disabled	Whether to apply delta MCS
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.20.3 MsgA configurations in FR2

A.3.20.3.1 FR2 MsgA configuration 1

FR2 MsgA configuration 1 in this clause provides the typical MsgA configuration for SSB-based contention based random access for 2-step RA type in FR2.

Table A.3.20.3.1-1: Parameters for FR2 MsgA configuration 1

Field	Value	Comment
msgA-prach-ConfigurationIndex	190	Preamble Format C2, with 10ms PRACH periodicity, and other detailed configurations defined in table 6.3.3.2-4 in TS 38.211 [6].
msgA-SubcarrierSpacing	Same as UL carrier SCS	
msgA-totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
msgA-PRACH-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
msgA-SSB-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention-based preambles per SSB
msgA-RO-FDM	One	One PRACH transmission occasions FDMed in one time instance.
ra-ContentionResolutionTimer	sf48	48 sub-frames
msgA-PreamblePowerRampingStep	dB2	
msgA-PreambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
msgB-ResponseWindow	sl10	10 slots
msgA-ZeroCorrelationZoneConfig	11	N-CS configuration, $N_{CS} = 23$
Backoff Parameter Index	2	20 ms, as defined in table 7.2-1 in TS 38.321 [7].
msgA-MCS	1	MCS index for MsgA PUSCH
nrofSlotsMsgA-PUSCH	1	Number of slots containing one or multiple PUSCH occasions
nrofMsgA-PO-PerSlot	1	Number of time domain PUSCH occasions in each slot
msgA-PUSCH-TimeDomainOffset	1	A single time offset with respect to the start of each PRACH slot, counted as the number of slots
PUSCH start symbol	0	
PUSCH allocation length	10	

mappingTypeMsgA-PUSCH	typeA	
nrofPRBs-PerMsgA-PO	2	Number of RBs per PUSCH occasion
nrofMsgA-PO-FDM	One	The number of MsgA PUSCH occasions FDMed in one time instance
msgA-DMRS-AdditionalPosition	pos1	Position for additional DM-RS
msgA-PUSCH-NrofPorts	1	Configure 1 port per CDM group
msgA-DeltaPreamble	2dB	Power offset of msgA PUSCH relative to the preamble received target power
msgA-Alpha	alpha1	Alpha value for MsgA PUSCH. Set 1
deltaMCS	Disabled	Whether to apply delta MCS
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.20.3.2 FR2 MsgA configuration 2

FR2 MsgA configuration 2 in this clause provides the typical MsgA configuration for SSB based non-contention based random access for 2-step RA type in FR2.

Table A.3.20.3.2-1: Parameters for FR2 MsgA configuration 2

Field	Value	Comment
msgA-prach-ConfigurationIndex	190	Preamble Format C2, with 10ms PRACH periodicity, and other detailed configurations defined in table 6.3.3.2-4 in TS 38.211 [6].
msgA-SubcarrierSpacing	Same as UL carrier SCS	
totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
msgA-PRACH-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msgA-RO-FDM	One	One PRACH transmission occasions FDMed in one time instance.
msgA-PreamblePowerRampingStep	dB2	
msgA-PreambleReceivedTargetPower	dBm-120	
preambleTransMax	n6	Max number of RA preamble transmission performed before declaring a failure is 6
msgB-ResponseWindow	sl10	10 slots
msgA-ZeroCorrelationZoneConfig	11	N-CS configuration, $N_{CS} = 23$
Backoff Parameter Index	2	20 ms, as defined in table 7.2-1 in TS 38.321 [7].
ssb-ResourceList	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.
BFR-SSB-Resource	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
ra-ssb-OccasionMaskIndex	1	PRACH occasion index 1 is allowed
msgA-MCS	1	MCS index for MsgA PUSCH
nrofSlotsMsgA-PUSCH	1	Number of slots containing one or multiple PUSCH occasions

nrofMsgA-PO-PerSlot	1	Number of time domain PUSCH occasions in each slot
msgA-PUSCH-TimeDomainOffset	1	A single time offset with respect to the start of each PRACH slot, counted as the number of slots
PUSCH start symbol	0	
PUSCH allocation length	10	
mappingTypeMsgA-PUSCH	typeA	
nrofPRBs-PerMsgA-PO	2	Number of RBs per PUSCH occasion
nrofMsgA-PO-FDM	One	The number of MsgA PUSCH occasions FDMed in one time instance
msgA-DMRS-AdditionalPosition	pos1	Position for additional DM-RS
msgA-PUSCH-NrofPorts	1	Configure 1 port per CDM group
msgA-DeltaPreamble	2dB	Power offset of msgA PUSCH relative to the preamble received target power
msgA-Alpha	alpha1	Alpha value for MsgA PUSCH. Set 1
deltaMCS	Disabled	Whether to apply delta MCS
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.20A MsgA configurations under CCA

A.3.20A.1 Introduction

This clause provides the typical PRACH and PUSCH configurations for MsgA used for RRM test cases defined in Annex A. To note that for other parameters not listed in this clause, either it can be derived from the set up of each test or it is subjected to RAN5 specifications.

A.3.20A.2 MsgA configurations in FR1

A.3.20A.2.1 FR1 MsgA configuration 1 under CCA

FR1 MsgA configuration 1 under CCA in this clause provides the typical MsgA configuration for SSB-based contention based random access for 2-step RA type in FR1.

Table A.3.20A.2.1-1: Parameters for FR1 MsgA configuration 1 under CCA

Field	Value	Comment
msgA-prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msgA-SubcarrierSpacing	Same as UL carrier SCS	
msgA-totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
msgA-PRACH-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
msgA-SSB-perRACH-OccasionAndCB-PreamblesPerSSB	oneFourth, n48	OneFourth: 1 SSB associated with 4 RACH occasions n48: 48 contention based preambles per SSB
msgA-RO-FDM	One	One PRACH transmission occasions FDMed in one time instance.
ra-ContentionResolutionTimer	sf48	48 sub-frames
msgA-PreamblePowerRampingStep	dB2	

msgA-PreambleReceivedTargetPower	dBm-114	Increased by 6 dB compared with FR1 MsgA configuration 1 for random access test with UL CCA failures.
preambleTransMax	n20	Max number of RA preamble transmission performed before declaring a failure is 20 to account for CCA failures
msgB-ResponseWindow	sl20	20 slots
msgA-ZeroCorrelationZoneConfig	11	N-CS configuration, N _{cs} = 23
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
msgA-MCS	1	MCS index for MsgA PUSCH
nrofSlotsMsgA-PUSCH	1	Number of slots containing one or multiple PUSCH occasions
nrofMsgA-PO-PerSlot	1	Number of time domain PUSCH occasions in each slot
msgA-PUSCH-TimeDomainOffset	1	A single time offset with respect to the start of each PRACH slot, counted as the number of slots
PUSCH start symbol	0	
PUSCH allocation length	14	
mappingTypeMsgA-PUSCH	typeA	
nrofPRBs-PerMsgA-PO	2	Number of RBs per PUSCH occasion
nrofMsgA-PO-FDM	One	The number of MsgA PUSCH occasions FDMed in one time instance
msgA-DMRS-AdditionalPosition	pos1	Position for additional DM-RS
msgA-PUSCH-NrofPorts	1	Configure 1 port per CDM group
msgA-DeltaPreamble	3	Power offset of msgA PUSCH relative to the preamble received target power
msgA-Alpha	alpha1	Alpha value for MsgA PUSCH. Set 1
deltaMCS	Disabled	Whether to apply delta MCS
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.20A.2.2 FR1 MsgA configuration 2 under CCA

FR1 PRACH configuration 2 under CCA in this clause provides the typical MsgA configuration for SSB based non-contention based random access for 2-step RA type in FR1.

Table A.3.20A.2.2-1: Parameters for FR1 MsgA configuration 2 under CCA

Field	Value	Comment
msgA-prach-ConfigurationIndex	102	10ms PRACH periodicity, and other detailed configuration defined in table 6.3.3.2-2 and table 6.3.3.2-3 in TS 38.211 [6].
msgA-SubcarrierSpacing	Same as UL carrier SCS	
msgA-totalNumberOfRA-Preambles	48	Total number of preambles used for contention based and contention free random access
numberOfRA-PreamblesGroupA	48	No group B.
msgA-PRACH-RootSequenceIndex	0	Logic sequence index = 0, resulting in root sequence = 1.
ssb-perRACH-Occasion	oneFourth	OneFourth: 1 SSB associated with 4 RACH occasions
msgA-RO-FDM	One	One PRACH transmission occasions FDMed in one time instance.
msgA-PreamblePowerRampingStep	dB2	
msgA-PreambleReceivedTargetPower	dBm-114	Increased by 6 dB compared with FR1 MsgA configuration 2 for random access test with UL CCA failures.

preambleTransMax	n20	Max number of RA preamble transmission performed before declaring a failure is 20 to account for CCA failures
msgB-ResponseWindow	sl20	20 slots
msgA-ZeroCorrelationZoneConfig	11	N-CS configuration, N _{cs} = 23
Backoff Parameter Index	2	20ms, as defined in table 7.2-1 in TS 38.321 [7].
ssb-ResourceList	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE doesn't use this field if is transmitting CFRA to convey BFR.
BFR-SSB-Resource	ra-PreambleIndex = 50	Associated with SSB index 0. UE doesn't use ssb-ResourceList and BFR-SSB-Resource IEs at the same time. UE uses this field only if is transmitting CFRA to convey BFR
ra-ssb-OccasionMaskIndex	1	PRACH occasion index 1 is allowed
msgA-MCS	1	MCS index for MsgA PUSCH
nrofSlotsMsgA-PUSCH	1	Number of slots containing one or multiple PUSCH occasions
nrofMsgA-PO-PerSlot	1	Number of time domain PUSCH occasions in each slot
msgA-PUSCH-TimeDomainOffset	1	A single time offset with respect to the start of each PRACH slot, counted as the number of slots
PUSCH start symbol	0	
PUSCH allocation length	14	
mappingTypeMsgA-PUSCH	typeA	
nrofPRBs-PerMsgA-PO	2	Number of RBs per PUSCH occasion
nrofMsgA-PO-FDM	One	The number of MsgA PUSCH occasions FDMed in one time instance
msgA-DMRS-AdditionalPosition	pos1	Position for additional DM-RS
msgA-PUSCH-NrofPorts	1	Configure 1 port per CDM group
msgA-DeltaPreamble	3	Power offset of msgA PUSCH relative to the preamble received target power
msgA-Alpha	alpha1	Alpha value for MsgA PUSCH. Set 1
deltaMCS	Disabled	Whether to apply delta MCS
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.3.21 V2X sidelink communication

A.3.21.1 Introduction

This clause also defines the principle and the reference configurations that are applicable to test cases verifying RRM core requirements for V2X sidelink communication.

A.3.21.2 Reference resource pool configurations for V2X Sidelink Communication

Table A.3.21.2-1: V2X sidelink SL-BWP configuration for NR

Field	Value	Comment
SL-BWP-ConfigCommon-r16		

sl-BWP-Generic-r16		
sl-LengthSymbols-r16	sym14	All 14 symbols in a slot without S-SSB are used for sidelink
sl-StartSymbol-r16	sym0	Symbol #0 is the starting symbol used for sidelink in a slot without S-SSB
sl-BWP-PoolConfigCommon-r16		
sl-RxPool-r16		Indicates the resource pool for reception on the configured BWP. 1 entry
SL-ResourcePool-r16[1]	Set according to Table A.3.21.2-2	Entry 1
sl-TxPoolSelectedNormal-r16		Indicates the resources pool for mode 2 sidelink communication on the configured BWP. 1 entry
SL-ResourcePoolConfig-r16[1]		Entry 1
sl-ResourcePool-r16	Set according to Table A.3.21.2-2	
sl-TxPoolExceptional-r16	Not present	

Table A.3.21.2-2: V2X sidelink resource pool configuration for NR

Field	Value	Comment
SL-ResourcePool-r16		
sl-PSCCH-Config-r16	Set according to Table A.3.21.3-1	
sl-PSSCH-Config-r16	Set according to Table A.3.21.3-2	
sl-PSFCH-Config-r16	Not present	
sl-SyncAllowed-r16		Indicates the allowed synchronization reference(s) which is (are) allowed to use the configured resource pool.
gnss-Sync-r16	true	
gnbEnb-Sync-r16	true	
ue-Sync-r16	true	
sl-SubchannelSize-r16	n10	Subchannel bandwidth is 10 RB
sl-StartRB-Subchannel-r16	0	The offset of lowest RB index of the subchannel with the lowest index in the resource pool with respect to the lowest RB index of a SL BWP
sl-NumSubchannel-r16	1	Number of subchannels in resource pool
sl-UE-SelectedConfigRP-r16		
sl-Thres-RSRP-List-r16	Set according to the specific test configuration	Indicates a list of 64 thresholds, and the threshold should be selected based on the priority in the decoded SCI and the priority in the SCI to be transmitted. A resource is excluded if it is indicated or reserved by a decoded SCI and PSSCH RSRP in the associated data resource is above a threshold.
sl-MultiReserveResource-r16	Not present	
sl-MaxNumPerReserve-r16	n2	At most 2 PSCCH/PSSCH resources can be reserved by a single SCI.

sl-SensingWindow-r16	ms100	Length of resource sensing window specified in TS 38.214 [26] subclause 8.1.4. which is 100ms.
sl-SelectionWindowList-r16		Parameter that determines the end of the selection window for each priority level 8 entries
SL-SelectionWindowConfig-r16[k,k=1..8]		entry k
sl-Priority-r16	k	for priority level = k
sl-SelectionWindow-r16	n20	Length of resource selection window specified in TS 38.214 [26] subclause 8.1.4. which is $20 \cdot 2^{\mu}$ slots, where $\mu=0,1,2,3$ refers to SCS 15,30,60,120 kHz respectively
sl-ResourceReservePeriodList-r16	Not present	
sl-RS-ForSensing-r16	pssch	PSSCH-RSRP measurement is used in the sensing operation.
sl-RxParametersNcell	Not present	
sl-ZoneConfigMCR-List-r16	Not present	
sl-PreemptionEnable-r16	enabled	
sl-MinMaxMCS-List-r16		1 entry
SL-MinMaxMCS-Config-r16[1]		Entry 1
sl-MCS-Table-r16	qam64	TS 38.214 [26] Table 5.1.3.1-1 is the MCS table used in the resource pool.
sl-TimeResource-r16	1111111111 1111111111	Every slot in a period of 20 slots during a SFN or DFN cycle can be used for sidelink
SL-TxPercentageList-r16		
SL-TxPercentageConfig-r16		
sl-TxPercentage-r16	p20	Indicates the portion of candidate single-slot PSSCH resources over the total resources. Value p20 corresponds to 20%, and so on.

Table A.3.21.2-3: V2X sidelink UE autonomous resource selection configuration for NR

Field	Value	Comment
SL-UE-SelectedConfig-r16		
sl-PSSCH-TxConfigList-r16		1 entry
SL-PSSCH-TxConfig-r16[1]		Entry 1
sl-TypeTxSync-r16	Not present	When this field is absent, the configuration is applicable for all synchronization reference types.
sl-ThresUE-Speed-r16	kmph200	UE shall apply the parameters in sl-ParametersAboveThres-r16 if UE absolute speed is higher than 200 km/h, otherwise UE shall apply the parameters in sl-ParametersBelowThres-r16
sl-ParametersAboveThres-r16		
sl-MinMCS-PSSCH-r16	0	The minimum MCS index value can be used for PSSCH transmission.
sl-MaxMCS-PSSCH-r16	15	The maximum MCS index value can be used for PSSCH transmission.
sl-MinSubChannelNumPSSCH-r16	1	The minimum number of subchannels can be used for PSSCH transmission.
sl-MaxSubchannelNumPSSCH-r16	1	The maximum number of subchannels can be used for PSSCH transmission.
sl-MaxTxTransNumPSSCH-r16	1	The maximum transmission number for PSSCH (including new transmission and retransmission).
sl-MaxTxPower-r16	Not present	Not applicable
sl-ParametersBelowThres-r16		
sl-MinMCS-PSSCH-r16	4	Same as above
sl-MaxMCS-PSSCH-r16	25	Same as above

sl-MinSubChannelNumPSSCH-r16	1	Same as above
sl-MaxSubchannelNumPSSCH-r16	1	Same as above
sl-MaxTxTransNumPSSCH-r16	1	Same as above
sl-MaxTxPower-r16	Not present	Same as above
sl-ProbResourceKeep-r16	v0dot8	The probability of UE keeping current resource is 80% when the resource reselection counter reaches 0 (see TS 38.321 [7]).
sl-ReselectAfter-r16	n1	Resource reselection is triggered after 1 sidelink transmission is skipped (see TS 38.321 [7]).

A.3.21.3 Reference measurement channels for V2X Sidelink Communication

Table A.3.21.3-1: PSSCH Reference Measurement Channels

Parameter		Unit	Value
Reference channel			CC.1A HD
Channel bandwidth		MHz	Note2
Number of PSSCH symbols per slot			2
Number of PSSCH RB			10
Modulation			QPSK
Information Bit Payload (without CRC)		Bits	26
Information Bit	Number of DMRS ports		0 (1 port)
	Priority		As set by higher layers
	Resource reservation period		N/A
	Modulation and coding scheme		Set as the PSSCH MCS specified in the test
	DMRS pattern		0 (2 DMRS)
	2 nd stage SCI format		00 (SCI format 2-A)
	Beta offset indicator		Set as specified in the test
	Frequency resource assignment		Set as per PSSCH RB allocation specific in the test
	Time resource assignment		Set as per PSSCH slot allocation specific in the test
Reserved bits			Set all these bits to 0
Transport block CRC		Bits	24
Binary Channel Bits (see Note 1)		Bits	360
Note 1: Binary channel bits calculated under assumption of 2 CP-OFDM symbols per subframe.			
Note 2: Channel bandwidth depends on test configuration.			

Table A.3.21.3-2: PSSCH Reference Measurement Channels

Parameter		Unit	Value
Reference channel			CD.1A HD
Sidelink transmission mode			2
Channel bandwidth		MHz	Note1
Allocated PSSCH resource blocks			10
Number of PSSCH symbols per slot			10
Modulation			QPSK
Target Code Rate			1/3
Information Bit Payload (Transport block size)		Bits	672

Transport block CRC	Bits	24
Number of PSSCH HARQ retransmissions		0
Binary Channel Bits	Bits	2160
Note 1: Channel bandwidth depends on test configuration.		
Note 2: 2nd state SCI and PSFCH are not allocated per slot.		

A.3.21.4 Reference SL-DRX configurations

A.3.21.4.1 SL-DRX Configuration 1: SL-DRX cycle = 40 ms

Table A.3.21.4.1-1: SL-DRX.1: SL-DRX cycle = 40 ms

Field	Value
sl-DRX-GC-BC-OnDurationTimer	2 ms
sl-DRX-GC-InactivityTimer	2 ms
sl-DRX-GC-RetransmissionTimer	16 slot
sl-DRX-GC-BC-CyclelongDRX	40 ms
Note: This SL-DRX configuration is applicable for V2X sidelink communication. For further information see clause 6.3.5 in TS 38.331.	

A.3.21.4.2 SL-DRX Configuration 2: SL-DRX cycle = 320 ms

Table A.3.21.4.2-1: SL-DRX.2: SL-DRX cycle = 320 ms

Field	Value
sl-DRX-GC-BC-OnDurationTimer	2 ms
sl-DRX-GC-InactivityTimer	2 ms
sl-DRX-GC-RetransmissionTimer	16 slot
sl-DRX-GC-BC-CyclelongDRX	320 ms
Note: This SL-DRX configuration is applicable for V2X sidelink communication. For further information see clause 6.3.5 in TS 38.331.	

A.3.21.4.3 SL-DRX Configuration 3: SL-DRX cycle = 640 ms

Table A.3.21.4.3-1: SL-DRX.3: SL-DRX cycle = 640 ms

Field	Value
sl-DRX-GC-BC-OnDurationTimer	2 ms
sl-DRX-GC-InactivityTimer	2 ms
sl-DRX-GC-RetransmissionTimer	16 slot
sl-DRX-GC-BC-CyclelongDRX	640 ms
Note: This SL-DRX configuration is applicable for V2X sidelink communication. For further information see clause 6.3.5 in TS 38.331.	

A.3.22 CSI-IM configurations

A.3.22.1 FDD

Table A.3.22.1-1: CSI-IM Reference Measurement Channels for SCS=15kHz

	CSI-IM.1.1 FDD	CSI-IM.1.2 FDD	CSI-IM.1.3 FDD
Resource Type	periodic	aperiodic	periodic
Resource Set Config			
csi-IM-ResourceSetId	0	0	0
Resource Config			
csi-IM-ResourceId	0 for resource #0	10 for resource #0	2 for resource #0
	1 for resource #1	11 for resource #1	3 for resource #1
csi-IM-ResourceElementPattern	pattern1	pattern1	pattern1
subcarrierLocation-p1	s0	s0	s0
symbolLocation-p1	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
Period (slots)	slot20	n.a.	slot10
Offset	1	n.a.	2
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the test Equipment shall implement CSI-RS only in the width of that BWP.			

A.3.22.2 TDD

Table A.3.22.2-1: CSI-IM Reference Measurement Channels for SCS=15kHz

	CSI-IM.1.1 TDD	CSI-IM.1.2 TDD	CSI-IM.1.3 TDD
Resource Type	periodic	aperiodic	periodic
Resource Set Config			
csi-IM-ResourceSetId	0	0	0
Resource Config			
csi-IM-ResourceId	0 for resource #0	10 for resource #0	2 for resource #0
	1 for resource #1	11 for resource #1	3 for resource #1
csi-IM-ResourceElementPattern	pattern1	pattern1	pattern1
subcarrierLocation-p1	s0	s0	s0
symbolLocation-p1	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
Period (slots)	slot20	n.a.	slot10
Offset	1	n.a.	2
startingRB	0	0	0

nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the test Equipment shall implement CSI-RS only in the width of that BWP.			

Table A.3.22.2-2: CSI-IM Reference Measurement Channels for SCS=30kHz

	CSI-IM.2.1 TDD	CSI-IM.2.2 TDD	CSI-IM.2.3 TDD
Resource Type	periodic	aperiodic	periodic
Resource Set Config			
csi-IM-ResourceSetId	0	0	0
Resource Config			
csi-IM-ResourceId	0 for resource #0	10 for resource #0	2 for resource #0
	1 for resource #1	11 for resource #1	3 for resource #1
csi-IM-ResourceElementPattern	pattern1	pattern1	pattern1
subcarrierLocation-p1	s0	s0	s0
symbolLocation-p1	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
Period (slots)	slot40	n.a.	slot40
Offset	2	n.a.	4
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)
Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the test Equipment shall implement CSI-RS only in the width of that BWP.			

Table A.3.22.2-3: CSI-RS Reference Measurement Channels for SCS=120kHz

	CSI-IM.3.1 TDD	CSI-IM.3.2 TDD	CSI-IM.3.3 TDD
Resource Type	periodic	aperiodic	periodic
Resource Set Config			
csi-IM-ResourceSetId	0	0	0
Resource Config			
csi-IM-ResourceId	0 for resource #0	10 for resource #0	2 for resource #0
	1 for resource #1	11 for resource #1	3 for resource #1
csi-IM-ResourceElementPattern	pattern1	pattern1	pattern1
subcarrierLocation-p1	s0	s0	s0
symbolLocation-p1	6 for resource #0	7 for resource #0	6 for resource #0
	10 for resource #1	11 for resource #1	10 for resource #1
Period (slots)	slot160	n.a.	slot80
Offset	8	n.a.	16
startingRB	0	0	0
nrofRBs	276 (Note 1)	276 (Note 1)	276 (Note 1)

Note 1: If the configured value of PRBs is larger than the width of the corresponding BWP relevant for the test case, the test Equipment shall implement CSI-RS only in the width of that BWP.

A.3.23 Spatial Relation Configuration

A.3.23.1 Introduction

This clause provides the configurations for spatial relation towards either SSB or CSI-RS. The spatial relation defined in this clause are configured in each test when applicable to indicate spatial setting for certain UL signals with the referenceSignal configured in the spatial relation.

A.3.23.2 Spatial Relation

Table A.3.23.2-1: PUCCH Spatial Relation

Parameter	PUCCH.SRI.0	PUCCH.SRI.1
pucch-SpatialRelationInfoId	Id0	Id1
referenceSignal	SSB0	SSB1
PUCCH-PathlossReferenceRS	SSB0	SSB1
Note 1: referenceSignal configurations towards which the spatial relation are configured in a test-specific manner.		

Table A.3.23.2-2: SRS Spatial Relation

Parameter	SRS.SRI0	SRS.SRI1
srs-SpatialRelationInfoId	Id0	Id1
referenceSignal	SSB0	SSB1
Note 1: referenceSignal configurations towards which the spatial relation are configured in a test-specific manner.		

A.3.24 SRS configuration

Table A.3.24-1: Sounding Reference Symbol Configuration for SCS=15kHz

	SRS.1 TDD	SRS.4 TDD	PDC-SRS.1	POS-SRS.1	
Field	Value				Comment
c-SRS	12	12	Same as $N_{RB,c}$ in the test case	Same as $N_{RB,c}$ in the test case	
b-SRS	0	0	0	n.a.	
b-hop	0	0	0	n.a.	Frequency hopping is disabled
groupOrSequenceHopping	neither	neither	neither	neither	No group or sequence hopping
freqDomainPosition	0	0	0	0	Frequency domain position of SRS
freqDomainShift	0	0	0	0	

pathlossReferenceRS ssb-Index	0	0	0	0	SSB #0 is used for SRS path loss estimation
usage	antennaSwitchin g	antennaSwitchin g	usagePDC -r17	n.a.	
startPosition ^{Note 1}	1	1	5	5	resourceMapping setting
nrofSymbols ^{Note 1}	1	1	4	4	
repetitionFactor	n1	n1	n.a.	n.a.	without repetition.
transmissionComb	n2	n2	n4	n4	
combOffset-n2	0	0	0	0	transmissionCom b setting
cyclicShift-n2	0	0	0	0	
nrofSRS-Ports ^{Note 1}	port1	port1	port1	port1	Number of antenna ports used for SRS transmission
resourceType	Periodic	Aperiodic	Periodic	Periodic	
periodicityAndOffset-p ^{Note 1}	sl40, 1	N/A	sl160, 20	sl160, 20	SRS transmission periodicity
Note 1: For test cases in A.4.5.2.11, A.4.5.2.12, A.6.5.2.3, A.6.5.2.4, the startPosition, nrofSymbols, nrofSRS-Ports, periodicityAndOffset-p are specified in each test cases.					

Table A.3.24-2: Sounding Reference Symbol Configuration for SCS=30kHz

	SRS.2 TDD	SRS.5 TDD	PDC-SRS.2	POS-SRS.2	
Field	Value				Comment
c-SRS	24	24	Same as NRB,c in the test case	Same as NRB,c in the test case	
b-SRS	0	0	0	n.a.	
b-hop	0	0	0	n.a.	Frequency hopping is disabled
groupOrSequenceHopping	neither	neither	neither	neither	No group or sequence hopping
freqDomainPosition	0	0	0	0	Frequency domain position of SRS
freqDomainShift	0	0	0	0	
pathlossReferenceRS ssb-Index	0	0	0	0	SSB #0 is used for SRS path loss estimation
usage	antennaSwitchin g	antennaSwitchin g	usagePDC -r17	n.a.	
startPosition ^{Note 1}	3	3	5	5	resourceMapping setting
nrofSymbols ^{Note 1}	1	1	4	4	SRS symbols belong to the same SRS resource.
repetitionFactor	n1	n1	n.a.	n.a.	without repetition.
transmissionComb	n2	n2	n4	n4	

combOffset-n2	0	0	0	0	transmissionComb setting
cyclicShift-n2	0	0	0	0	
nrofSRS-Ports ^{Note 1}	port1	port1	port1	port1	Number of antenna ports used for SRS resource transmission
resourceType	Periodic	Aperiodic	Periodic	Periodic	
periodicityAndOffset-p ^{Note 1}	sl80, 3	N/A	Sl320, 40	Sl320, 40	SRS transmission periodicity
Note 1: For test cases in A.4.5.2.11, A.4.5.2.12, A.6.5.2.3, A.6.5.2.4, the startPosition, nrofSymbols, nrofSRS-Ports, periodicityAndOffset-p are specified in each test cases.					

Table A.3.24-3: Sounding Reference Symbol Configuration for SCS=120kHz

	SRS.3 TDD	SRS.6 TDD		PDC-SRS.3	POS-SRS.3	
Field	Value					Comment
c-SRS	17	17		Same as NRB,c in the test case	Same as NRB,c in the test case	
b-SRS	0	0		0	n.a.	
b-hop	0	0		0	n.a.	Frequency hopping is disabled
groupOrSequenceHopping	neither	neither		neither	neither	No group or sequence hopping
freqDomainPosition	0	0		0	0	Frequency domain position of SRS
freqDomainShift	0	0		0	0	
pathlossReferenceRSssb-Index	0	0		0	0	SSB #0 is used for SRS path loss estimation
usage	antennaSwitching	antennaSwitching		usagePDC-r17	n.a.	
startPosition	1	1		5	5	resourceMapping setting
nrofSymbols	1	1		4	4	SRS symbols belong to the same SRS resource.
repetitionFactor	n1	n1		n1	n.a.	without repetition.
transmissionComb	n2	n2		n4	n4	
combOffset-n2	0	0		0	0	transmissionComb setting
cyclicShift-n2	0	0		0	0	
nrofSRS-Ports	port1	port1		port1	port1	Number of antenna ports used for SRS resource transmission

resourceType	Periodic	Aperiodic		Periodic	Periodic	
periodicityAndOffset-p	sl320, 3	N/A		SI1280, 160	SI1280, 160	SRS transmission periodicity

A.3.25 Channel bandwidth (CBW) configurations

A.3.25.1 DL UE specific CBW

Table A.3.25.1-1: DL CBW patterns for UE specific CBW configuration

BWP Parameters	Unit	Values	
Reference CBW		DLCBW.1.1	DLCBW.1.2
OffsetToCarrier	RB	RB _y ^{Note 2}	RB _x ^{Note 1}
carrierBandwidth	RB	Same as RF channel defined in each test	Same as RF channel defined in each test
Note 1: RB_x is offset in frequency domain between Point A (lowest subcarrier of common RB 0) and the lowest usable subcarrier on this carrier. Note that RB_x has to be within the CBW of BS. Note 2: RB_y is offset in frequency domain between Point A (lowest subcarrier of common RB 0) and the lowest usable subcarrier on this carrier. Note that RB_y has to be within the CBW of BS and different with RB_x, and CBW should include SSB and CORESET#0.			

A.3.25.2 UL UE specific CBW

Table A.3.25.2-1: UL CBW patterns for UE specific CBW configuration

BWP Parameters	Unit	Values	
Reference CBW		ULCBW.1.1	ULCBW.1.2
OffsetToCarrier	RB	RB _y ^{Note 2}	RB _x ^{Note 1}
carrierBandwidth	RB	Same as RF channel defined in each test	Same as RF channel defined in each test
Note 1: RB_x is offset in frequency domain between Point A (lowest subcarrier of common RB 0) and the lowest usable subcarrier on this carrier. Note that RB_x has to be within the CBW of BS. Note 2: RB_y is offset in frequency domain between Point A (lowest subcarrier of common RB 0) and the lowest usable subcarrier on this carrier. Note that RB_y has to be within the CBW of BS and different with RB_x.			

A.3.26 CCA model

A.3.26.1 Introduction

The CCA model is used in some RRM test cases with at least one cell on a carrier frequency with CCA. The intention with the CCA model is to emulate in the test equipment the behaviour of a gNB or UE which performs channel measurement to check that the channel is clear prior to performing one or more downlink or uplink transmissions.

A.3.26.2 CCA model for operation on a carrier frequency with CCA in FR1

A.3.26.2.1 DL CCA model

The same DL CCA model is applicable regardless of whether DRX cycle is used or not with the following differences:

- The counter, l_{CCA} , is used to monitor the number of unavailable DBT samples within an evaluation window, W_{CCA_DL} . DBT samples outside of the evaluation window W_{CCA_DL} are discarded.
- If DRX cycle is not used then prior to each DBT window, the test equipment shall determine whether the DL CCA attempt is successful (i.e., the corresponding signals have to be transmitted), based on probability P_{CCA_DL} of successful DL CCA configured in the corresponding test case. If DRX cycle is not used, then the DL CCA model shall increment the counter l_{CCA} for every unavailable DBT sample due to DL CCA failure.
- If DRX cycle is used, then the DL CCA model shall increment the counter, l_{CCA} , once per DRX cycle for a DRX cycle if the first DBT sample in that DRX cycle is unavailable due to DL CCA failure. DL CCA failures in a DRX cycle are determined as follows:
 - The test system *in the first DBT window of each DRX cycle* determines whether the DL CCA attempt is successful or not using the principle as follows:
 - If the DL CCA is successful then the test system shall transmit in all DBT windows within that DRX cycle.
 - If the DL CCA is not successful then the test system shall not transmit in any of the DBT windows within that DRX cycle. In this case l_{CCA} is increased by 1.
- The parameters, L_{CCA_DL} , L_{CCA_UL} , W_{CCA_DL} and W_{CCA_UL} can be used as in non-DRX tests.

If the CCA attempt is successful for a transmission, then the test equipment shall transmit also other remaining transmissions, according to the configuration, within the same DBT window.

If the CCA attempt is not successful for a transmission within the DBT window, the test equipment shall determine whether the CCA attempt is successful for the next configured transmission, based on probability P_{CCA_DL} .

The probability can be different in different time intervals T_i during a test case. One probability value (per cell) applies at any time point during a test; one or more probability values can be configured in the entire test, one value P_{CCA_DL} per time interval T_i where $i \geq 1$, and the multiple time intervals (when $i > 1$) do not overlap (e.g., $P_{CCA_DL} = 1.0$ in T_1 and $P_{CCA_DL} = 0.75$ in T_2).

For semi-static channel access configuration, a single value P_{CCA_DL} is used to configure the probability of CCA success in different time intervals T_i during a test realization. An additional limit L_{CCA_DL} is used to determine the maximum number of unavailable DBT samples within an evaluation window W_{CCA_DL} . If the number of unavailable DBT samples on the last W_{CCA_DL} DBT samples is larger or equal to L_{CCA_DL} , the CCA attempt is considered successful for transmission.

For dynamic channel access configuration, the parameters $P_{CCA_DL_1}$ and $P_{CCA_DL_2}$ are used to configure the probability of CCA success on the first and second SSB candidate positions, respectively, in different time intervals T_i during a test realization. An additional limit L_{CCA_DL} is used to determine the maximum number of unavailable DBT samples within an evaluation window W_{CCA_DL} . If the number of unavailable DBT samples on the last W_{CCA_DL} DBT samples is larger or equal to L_{CCA_DL} , the CCA attempt is considered successful for transmission.

For semi-static channel access configuration or for dynamic channel access configuration where one candidate SSB position is modeled, prior to each discovery burst transmission window within a time interval T_i of the test, the test equipment shall:

- 1 Generate a uniform random variable $p1$ from the range $[0, 1]$ for the first candidate position.
- 2 Transmit the discovery burst based on $p1$ in the first candidate position. If $p1 \leq P_{CCA_DL}$, the discovery burst is transmitted at the first candidate SSB location; else if l_{CCA} is larger than or equal to L_{CCA_DL} , the discovery burst is transmitted at the first candidate SSB location, otherwise the discovery burst is muted. If DRX cycle is used, then the decision whether the discovery burst is muted or not is repeated for the rest of the DRX cycle.

For dynamic channel access configuration where two candidate SSB positions are modelled, prior to each discovery burst transmission window within a time interval T_i of the test, the test equipment shall:

- 1 Generate a uniform random variable $p1$ from the range $[0, 1]$ for the first candidate position.
- 2 Transmit the discovery burst based on $p1$ in the first candidate position: if $p1 \leq P_{CCA_DL1}$, the discovery burst is transmitted at first candidate SSB location, else the test equipment shall:
 - a Generate a uniform random variable $p2$ from the range $[0, 1]$ for the second candidate SSB position.
 - b Transmit the discovery burst based on $p2$ in the second candidate position. If $p2 \leq P_{CCA_DL2}$, the discovery burst is transmitted at the second candidate SSB location; else if I_{CCA} is larger than or equal to L_{CCA_DL} , the discovery burst is transmitted at the second candidate SSB location, otherwise the discovery burst is muted. If DRX cycle is used, then the decision whether the discovery burst is muted or not is repeated for the rest of the DRX cycle.

The above steps are repeated for each discovery burst transmission window in each time interval T_i of the test. The limit L_{CCA_DL} and window W_{CCA_DL} is a configuration parameter for each test case.

In many test cases, the requirement under a test depends on the number of configured SSB transmissions which are not available during the test due to CCA failure, so the test equipment shall track how many such signal occasions are not transmitted in DL during the test period.

A.3.26.2.2 UL CCA model

For UL CCA, the modelling approach is based on probability P_{CCA_UL} of successful CCA. Probability P_{CCA_UL} is configured in the corresponding test case, based on a set S_{CCA_UL} of possible values including 75 % and 87% as typical values for dynamic and semi-static channel access configurations, 0% to model consistent UL CCA failures, and 100% to model no UL CCA failures.

Consistent UL CCA failures are modelled by configuring a low value for P_{CCA_UL} , e.g., $P_{CCA_UL} = 0\%$.

In the same time interval T_i during the same test case, P_{CCA_UL} can be different from P_{CCA_DL} .

The probability can be different in different time intervals T_i during a test case. One probability value applies at any time point during a test; one or more probability values can be configured in the entire test, one value P_{CCA_UL} per time interval T_i where $I \geq 1$, and the multiple time intervals (when $I > 1$) do not overlap (e.g., $P_{CCA_UL} = 1.0$ in T_1 and $P_{CCA_UL} = 0.75$ in T_2).

T_{CCA} μs prior to each UL transmission burst in the test, the test equipment (TE) shall generate a uniform random variable p from the range $[0, 1]$. If $p > P_{CCA_UL}$, the TE transmits an OCNG noise pattern with an energy level X per LBT measurement BW, within the UE BW scheduled/configured for the UL transmission for at-least T_{CCA} μs . Where T_{CCA} μs is energy detection time for accessing the uplink channel as defined in section 5.1.1 of TS 37.106 [36]. Where:

- X is 9 dB above the energy detection threshold defined in section 5.1.1 of TS 37.106 [36].
- T_{CCA} is the channel sensing period depending on CCA category for the next UL transmission.

The TE shall count the number of UL CCA failures, and no further UL CCA failures are modeled if the number of failures exceeds the limit L_{CCA_UL} within a window W_{CCA_UL} . For each UL CCA failure generated by the model, the TE shall monitor the corresponding UL resource for the desired UL signal, and based on when and/or whether the TE received the desired UL signal, it deems the test case to pass or fail.

In many cases, the requirement under a test depends on the number of configured signal occasions which are not available during the test, so the test equipment shall track how many such signal occasions are not transmitted in UL during the test period.

A.3.26.3 CCA model for operation on a carrier frequency with CCA in FR2-2

A.3.26.3.1 DL CCA model

For DL CCA, the modelling approach is based on probability $P_{\text{CCA_DL}}$ of successful CCA.

If the CCA attempt is successful for a transmission, then the test equipment shall transmit also other remaining transmissions, according to the configuration, within the same DBT window.

If the CCA attempt is not successful for a transmission within the DBT window, the test equipment shall determine whether the CCA attempt is successful for the next configured transmission, based on probability $P_{\text{CCA_DL}}$.

To decide whether the CCA attempt for one SSB/SMTC occasion within one SSB/SMTC occasion group, where one SSB/SMTC occasion group consists of 12 consecutive SSB/SMTC occasions is successful or not, TE shall:

- 1 - Generate a uniform random variable p from the range $[0, 1]$.
- 2 - If $p > P_{\text{CCA_DL}}$,
 - TE picks one SSB/SMTC occasion out of a group of 12 consecutive SSB/SMTC occasions based on a fixed pattern, where one SSB/SMTC occasion is equivalent to one SSB burst Set.
 - TE models CCA failure in this SSB/SMTC occasion. Note that other 11 SSB/SMTC occasions shall be transmitted by the TE.
 - Whole SSB/SMTC occasion group is considered as unavailable to the UE.
- 2 - If $p \leq P_{\text{CCA_DL}}$,
 - TE transmit 12 consecutive SSB/SMTC occasions.
 - Whole SSB/SMTC occasion group is considered as available to the UE.

In many test cases, the requirement under a test depends on the number of configured SSB transmissions which are not available during the test due to CCA failure, so the test equipment shall track how many such signal occasions are not transmitted in DL during the test period.

A.3.26.3.2 UL CCA model

For UL CCA, the modelling approach is based on probability $P_{\text{CCA_UL}}$ of successful CCA. Probability $P_{\text{CCA_UL}}$ is configured in the corresponding test case.

Consistent UL CCA failures are modelled by configuring a low value for $P_{\text{CCA_UL}}$, e.g., $P_{\text{CCA_UL}} = 0\%$.

In the same time interval T_i during the same test case, $P_{\text{CCA_UL}}$ can be different from $P_{\text{CCA_DL}}$.

The probability can be different in different time intervals T_i during a test case. One probability value applies at any time point during a test; one or more probability values can be configured in the entire test, one value $P_{\text{CCA_UL}}$ per time interval T_i where $I \geq 1$, and the multiple time intervals (when $I > 1$) do not overlap (e.g., $P_{\text{CCA_UL}} = 1.0$ in T_1 and $P_{\text{CCA_UL}} = 0.75$ in T_2).

T_{CCA} μs prior to each UL transmission burst in the test, the test equipment (TE) shall generate a uniform random variable p from the range $[0, 1]$. If $p > P_{\text{CCA_UL}}$, the TE transmits an OCNG noise pattern with an energy level X within the UE BW scheduled/configured for the UL transmission for at-least T_{CCA} μs . Where T_{CCA} μs is energy detection time for accessing the uplink channel as defined in section 5.1.1 of TS 37.106 [36]. Where:

- X is 3 dB above the energy detection threshold defined in section 5.1.1 of TS 37.106 [36].
- T_{CCA} is the channel sensing period depending on CCA category for the next UL transmission.

In many cases, the requirement under a test depends on the number of configured signal occasions which are not available during the test, so the test equipment shall track how many such signal occasions are not transmitted in UL during the test period.

A.3.27 Test Cases with at Least One Cell on a Carrier Frequency with CCA

Editor's note: This clause will include applicability rules for the corresponding test cases.

A.3.27.1 Introduction

A.3.27.2 NR Standalone Tests with NR SCell under CCA and All Other NR Cells in FR1

Editor's note: This clause will include applicability rules for the corresponding test cases.

A.3.27.3 EN-DC Tests with NR PSCell under CCA and Other NR Cells in FR1

Editor's note: This clause will include applicability rules for the corresponding test cases.

A.3.27.4 NR Standalone Tests with NR PCell under CCA and Other NR Cells in FR1

Editor's note: This clause will include applicability rules for the corresponding test cases.

A.3.27.5 E-UTRA Standalone Tests with at Least One NR Cell under CCA

Editor's note: This clause will include applicability rules for the corresponding test cases.

A.3.28 Discovery Burst Transmission Window configuration under CCA

A.3.28.1 DBT Window pattern 1: DBT Window period = 20 ms with DBT Window duration = 1 ms

Table A.3.28.1-1: DBT.1: DBT Window Pattern 1 for DBT Window period = 20 ms and duration = 1 ms

SMTTC Parameters	Values
Discovery burst transmission window periodicity	20 ms
Discovery burst transmission window offset	0 ms
Discovery burst transmission window duration	1 ms

A.3.29 Testing principles for UE capable of only NR bands with shared spectrum access

A.3.29.1 Introduction

In annex A test cases are defined involving one or more NR cells operating on NR band(s) with shared spectrum channel access. The NR bands with shared spectrum channel access are defined in clause 5.2 of TS 38-101-1 [18].

A.3.29.2 Principle of testing for UE capable of EN-DC with only NR bands with shared spectrum access

In Annex A, test cases in table A.3.29.2-1 are defined for UE capable of EN-DC with only NR band(s) with shared spectrum access and are not required for UE supporting also other NR band(s) (i.e. band with no shared spectrum access). The EN-DC configurations are defined in clause 5.5B of TS 38.101-3 [20].

Table A.3.29.2-1: Test cases applicable to UE supporting EN-DC with only NR bands with shared spectrum access

Test category	Section	Test case
Active BWP switching	A.10.3.5.2.1	E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC
	A.10.3.5.2.2	E-UTRAN – NR PSCell FR1 DL active BWP switch with FR1 SCell in non-DRX in synchronous EN-DC
	A.10.3.5.3.1	E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC

A.3.29.3 Principle of testing for UE capable of SA operation with only NR bands with shared spectrum access

In Annex A, test cases in table A.3.29.3-1 are defined for UE capable of NR SA operation with only NR band(s) with shared spectrum access and are not required for UE supporting also other NR band(s) (i.e. band with no shared spectrum access).

Table A.3.29.3-1: Test cases applicable to UE supporting SA operation with only NR bands with shared spectrum access

Test category	Section	Test case
Active BWP switching	A.11.4.5.2.1	NR FR1- NR FR1 DL active BWP switch of PCell with non-DRX in SA
	A.11.4.5.2.2	NR FR1 DL active BWP switch with non-DRX in SA
	A.11.4.5.3.1	NR FR1 DL active BWP switch of Cell with non-DRX in SA

A.3.30 CSI-RS configurations for RRM

A.3.30.1 FDD

Table A.3.30.1-1: CSI-RS RRM Reference Measurement Channels for SCS=15kHz

	CSI-RS.RRM.FR1.1 FDD
CSI-RS-ResourceConfigMobility	
subcarrierSpacing, kHz	15
CSI-RS-CellMobility	
cellId ^{note1}	0

nrofPRBs	48
startPRB	0
density	3
CSI-RS-Resource-Mobility	
csi-RS-Index	0
slotConfig: ms20 ^{note2}	slot1
associatedSSB	True
ssb-Index ^{note3}	0
isQuasiColocated	True
firstOFDMSymbolInTimeDomain ^{note4}	10
sequenceGenerationConfig	0
Others	
nrofPorts	1
CDM Type	NoCDM
EPRE ratio to SSS, dB	0
Note1: unless specified otherwise Note2: unless specified otherwise Note3: assume the same SS/PBCH block index of the corresponding cell in the test case Note4: unless specified otherwise	

A.3.30.2 TDD

Table A.3.30.2-1: CSI-RS RRM Reference Measurement Channels for SCS=15kHz

	CSI-RS.RRM.FR1.1 TDD
CSI-RS-ResourceConfigMobility	
subcarrierSpacing, kHz	15
CSI-RS-CellMobility	
cellId ^{note1}	0
nrofPRBs	48
startPRB	0
density	3
CSI-RS-Resource-Mobility	
csi-RS-Index	0
slotConfig: ms20 ^{note2}	slot1
associatedSSB	True
ssb-Index ^{note3}	0
isQuasiColocated	True
firstOFDMSymbolInTimeDomain ^{note4}	10
sequenceGenerationConfig	0
Others	
nrofPorts	1
CDM Type	NoCDM
EPRE ratio to SSS, dB	0
Note1: unless specified otherwise Note2: unless specified otherwise Note3: assume the same SS/PBCH block index of the corresponding cell in the test case Note4: unless specified otherwise	

Table A.3.30.2-2: CSI-RS RRM Reference Measurement Channels for SCS=30kHz

	CSI-RS.RRM.FR1.2 TDD
CSI-RS-ResourceConfigMobility	

subcarrierSpacing, kHz	30
CSI-RS-CellMobility	
cellId ^{note1}	0
nrofPRBs	48
startPRB	0
density	3
CSI-RS-Resource-Mobility	
csi-RS-Index	0
slotConfig: ms20 ^{note2}	slot1
associatedSSB	True
ssb-Index ^{note3}	0
isQuasiColocated	True
firstOFDMSymbolInTimeDomain ^{note4}	10
sequenceGenerationConfig	0
Others	
nrofPorts	1
CDM Type	NoCDM
EPRE ratio to SSS, dB	0
Note1: unless specified otherwise Note2: unless specified otherwise Note3: assume the same SS/PBCH block index of the corresponding cell in the test case Note4: unless specified otherwise	

Table A.3.30.2-3: CSI-RS RRM Reference Measurement Channels for SCS=120kHz

	CSI-RS.RRM.FR2.1 TDD
CSI-RS-ResourceConfigMobility	
subcarrierSpacing, kHz	120
CSI-RS-CellMobility	
cellId ^{note1}	0
nrofPRBs	48
startPRB	0
density	3
CSI-RS-Resource-Mobility	
csi-RS-Index	0
slotConfig: ms20 ^{note2}	slot1
associatedSSB	True
ssb-Index ^{note3}	0
isQuasiColocated	True
firstOFDMSymbolInTimeDomain ^{note4}	10
sequenceGenerationConfig	0
Others	
nrofPorts	1
CDM Type	NoCDM
EPRE ratio to SSS, dB	0
Note1: unless specified otherwise Note2: unless specified otherwise Note3: assume the same SS/PBCH block index of the corresponding cell in the test case Note4: unless specified otherwise	

A.3.31 PRS Configurations

A.3.31.1. PRS Configurations for FR1

A.3.31.1.1. PRS pattern 1 in FR1: SCS=15 KHz

Table A.3.31.1.1-1: PRS.1 FR1: PRS Pattern 1 for SSB SCS=15 KHz

PRS Parameters	Values							
Reference channel	PRS.1.1 FR1		PRS.1.2 FR1		PRS.1.3 FR1		PRS.1.4 FR1	
Resource index in resource set	0		0		0	1	0	1
PRS periodicity	160ms							
PRS Resource set slot offset ^{Note 1}	10 ms							
PRS Resource slot offset (slot) ^{Note 1}	0		4		0		4	
PRS RE offset ^{Note 1}	0			0	1	0	1	
SCS	15kHz							
PRS comb size	2		4		2		4	
Number of PRS symbol	4		4		4		4	
Repetition factor	2		1		2		1	
PRS resource time gap (slot)	1		1		1		1	
RB numbers containing PRS within channel BW ^{Note 1}	0-23		0-103		0-23		0-103	
PRS Start PRB	0							
Note 1: Unless otherwise specified in the test case								

A.3.31.1.2. PRS pattern 2 in FR1: SCS=30 KHz

Table A.3.31.1.2-1: PRS.2 FR1: PRS Pattern 2 for SCS=30 KHz

PRS Parameters	Values											
Reference channel	PRS.2.1 FR1		PRS.2.2 FR1		PRS.2.3 FR1		PRS.2.4 FR1					
Resource index in resource set	0		0		0		1		0		1	
PRS periodicity	160ms											
PRS Resource set slot offset ^{Note 1}	10 ms											
PRS Resource slot offset (slot) ^{Note 1}	0			4			0			4		
PRS RE offset ^{Note 1}	0				0		1		0		1	
SCS	30kHz											
PRS comb size	2			4			2			4		
Number of PRS symbol	4			4			4			4		
Repetition factor	2			1			2			1		
PRS resource time gap (slot)	1			1			1			1		
RB numbers containing PRS within channel BW ^{Note 1}	0-23			0-131			0-23			0-131		
PRS Start PRB	0											
Note 1: Unless otherwise specified in the test case												

A.3.31.2. PRS Configurations for FR2

A.3.31.2.1. PRS pattern 1 in FR2: SCS=120 KHz

Table A.3.31.2.1-1: PRS.1 FR2: PRS Pattern 1 for SCS=120 KHz

PRS Parameters	Values					
Reference channel	PRS.1.1 FR2		PRS.1.2 FR2		PRS.1.3 FR2	
Resource index in resource set	0	0	0	1	0	1
PRS periodicity	160ms					
PRS Resource set slot offset ^{Note 1}	10 ms					

PRS Resource slot offset (slot) ^{Note 1}	0	4	0	4		
PRS RE offset ^{Note 1}	0		0	1	0	1
SCS	120kHz					
PRS comb size	2	4	2	4		
Number of PRS symbol	4	4	4	4		
Repetition factor	2	1	2	1		
PRS resource time gap (slot)	1	1	1	1		
RB numbers containing PRS within channel BW ^{Note 1}	0-31	0-127	0-31	0-127		
PRS Start PRB	0					
Note 1: Unless otherwise specified in the test case						

A.3.32 NR sidelink discovery

A.3.32.1 Introduction

This clause also defines the principle and the reference configurations that are applicable to test cases verifying RRM core requirements for NR sidelink discovery.

A.3.32.2 Reference resource pool configurations for NR Sidelink Discovery

Table A.3.32.2-1: SL-BWP configuration for NR sidelink discovery

Field	Value	Comment
SL-BWP-ConfigCommon-r16		
sl-BWP-Generic-r16		
sl-LengthSymbols-r16	sym14	All 14 symbols in a slot without S-SSB are used for sidelink
sl-StartSymbol-r16	sym0	Symbol #0 is the starting symbol used for sidelink in a slot without S-SSB
sl-BWP-DiscPoolConfigCommon-r17		
sl-DiscRxPool-r17		Indicates the resource pool for reception on the configured BWP. 1 entry
SL-ResourcePool-r16[1]	Set according to Table A.3.21.2-2	Entry 1
sl-DiscTxPoolSelected-r17		Indicates the resources pool for mode 2 sidelink communication on the configured BWP. 1 entry
SL-ResourcePoolConfig-r16[1]		Entry 1
sl-ResourcePool-r16	Set according to Table A.3.21.2-2	

A.3.32.3 Principle of Testing

The UE capable of both V2X sidelink communication and NR sidelink discovery does not have to pass the test for interruption at NR sidelink discovery configuration defined in clause 9.1.6.1, if this UE has already passed the test case for interruption due to V2X sidelink communication defined in clause 9.1.6.1.

A.3.33 PRS Processing Window (PPW) configurations

Table A.3.33-1: Reference PPW configuration

PPW Parameters	Unit	Values
Reference PPW		PPW.1
Periodicity	slot	Note 1
Offset	slot	Note 2
Length	ms	10
Type		Same as the value reported in <i>prsProcessingType-r17</i>
Priority		st1
Note 1: Same as PRS resource set periodicity as used in the test case.		
Note 2: Same as PRS resource with smallest offset as used in the test case.		

A.3.34 Testing principles for test cases related to PRS measurements

A.3.34.1 Introduction

In annex A test cases are defined for verifying various type of PRS measurement and accuracy requirements.

A.3.34.2 Test cases in RRC_INACTIVE state

In Annex A, PRS measurement test cases are defined with 4 samples and with reduced number of samples in RRC_INACTIVE state. The testing principle for these test cases is as follows:

- A UE capable of *supportedDL-PRS-ProcessingSamples-RRC-Inactive* [34] is only required to pass the test cases with reduced number of samples.
- A UE not capable of *supportedDL-PRS-ProcessingSamples-RRC-Inactive* [34] is required to pass the test cases with 4 samples.

In Annex A, PRS measurement delay test cases are defined for both PRS-RSRP and PRS-RSRPP measurements in RRC_INACTIVE state. The testing principle for these test cases is as follows:

- A UE capable of both PRS-RSRP and PRS-RSRPP measurements is required to pass either PRS-RSRP measurement delay test or PRS-RSRPP measurement delay test.

In Annex A, PRS measurement delay test cases are defined for both RSTD and UE Rx-Tx time difference measurements in RRC_INACTIVE state. The testing principle for these test cases is as follows:

- A UE capable of both RSTD and UE Rx-Tx time difference measurements is required to pass either RSTD measurement delay test or UE Rx-Tx time difference measurement delay test.

A.3.34.3 Test cases for PRS measurements with gaps in RRC_CONNECTED state

In Annex A, PRS measurement test cases are defined with 4 samples and with reduced number of samples with measurement gaps in RRC_CONNECTED state. The testing principle for these test cases is as follows:

- A UE capable of *supportedDL-PRS-ProcessingSamples* [34] is only required to pass the test cases with reduced number of samples.

- A UE not capable of *supportedDL-PRS-ProcessingSamples* [34] is required to pass the test cases with 4 samples.

In Annex A, PRS measurement delay test cases are defined for both PRS-RSRP and PRS-RSRPP measurements with measurement gaps in RRC_CONNECTED state. The testing principle for these test cases is as follows:

- A UE capable of both PRS-RSRP and PRS-RSRPP measurements is required to pass either PRS-RSRP measurement delay test or PRS-RSRPP measurement delay test.

A.3.34.4 Test cases for PRS measurements without gaps in RRC_CONNECTED state

In Annex A, PRS measurement test cases are defined with 4 samples and with reduced number of samples without measurement gaps in RRC_CONNECTED state. The testing principle for these test cases is as follows:

- A UE capable of *supportedDL-PRS-ProcessingSamples* [34] is only required to pass the test cases with reduced number of samples.
- A UE not capable of *supportedDL-PRS-ProcessingSamples* [34] is required to pass the test case with 4 samples.

In Annex A, PRS measurement delay test cases are defined for both PRS-RSRP and PRS-RSRPP measurements without measurement gaps in RRC_CONNECTED state. The testing principle for these test cases is as follows:

- A UE capable of both PRS-RSRP and PRS-RSRPP measurements is required to pass either PRS-RSRP measurement delay test or PRS-RSRPP measurement delay test.

In Annex A, PRS measurement delay test cases are defined for both RSTD and UE Rx-Tx time difference measurements without measurement gaps in RRC_CONNECTED state. The testing principle for these test cases is as follows:

- A UE capable of both RSTD and UE Rx-Tx time difference measurements is required to pass either RSTD measurement delay test or UE Rx-Tx time difference measurement delay test.

A.3.35 Testing principle for RedCap UE

A.3.35.1 Introduction

This clause defines a principle which is applicable to test cases verifying RRM requirements for RedCap UE.

A.3.35.2 Principle of testing for FR1

For RedCap UEs supporting 1 Rx branch, all single carrier tests specified in clause A.16 and A.18 except for tests defined for 2 Rx and/or FR2 shall be tested on any band.

For RedCap UEs supporting 2Rx branches, all single carrier tests specified in clause A.16 and A.18 except for tests defined for 1 Rx and/or FR2 shall be tested on any band.

A.3.35.3 Principle of testing for FR2

For RedCap UEs, all single carrier tests specified in clause A.17 and A.18 except for tests defined for FR1 shall be tested on any band.

A.3.36 Testing related to Satellite access

A.3.36.1 Introduction

In annex A test cases are defined for verifying various type of RRM requirements related to satellite access.

A.3.36.2 Principle of testing GSO and NGSO scenarios

In Annex A, RRM test cases related to satellite access are defined for both GSO and NGSO. The testing principle for these test cases is as follows:

- A UE capable of GSO only is required to pass the test cases with GSO.
- A UE capable of NGSO only is required to pass the test cases with NGSO.
- A UE capable of both GSO and NGSO is required to pass the test cases with NGSO only.

Support of GSO and NGSO scenario is indicated via *ntn-ScenarioSupport-r17*.

A.3.36.2 Principle of testing different RRM requirements

In Annex A, RRM test cases related to satellite access are defined for all applicable RRM requirements. The testing principle for these test cases is as follows:

- A UE capable of NTN only is required to pass all the test cases defined in clause A.14.
- A UE capable of both TN and NTN is required to pass the test cases for NTN specific requirements in Table A.3.36.2-1.

Table A.3.36.2-1: Test cases for NTN specific requirements

Clause	Test case slogan
A.14.1.2	Cell reselection to FR1 intra-frequency NR cell for UE configured with [capability for enhanced requirements]
A.14.1.3	Time-based cell reselection to FR1 intra-frequency NR cell
A.14.1.4	Location-based cell reselection to FR1 intra-frequency NR cell
A.14.1.7	Cell reselection to FR1 inter-frequency NR cell for UE configured with [capability for enhanced requirements]
A.14.1.8	Time-based Cell reselection to FR1 inter-frequency NR satellite access case
A.14.1.9	Location-based Cell reselection to FR1 inter-frequency NR satellite access case
A.14.2.1.3	Intra-frequency SAN time-based conditional Handover from FR1 to FR1
A.14.2.1.4	Inter-frequency SAN time-based conditional Handover from FR1 to FR1
A.14.2.1.5	Intra-frequency SAN distance-based conditional Handover from FR1 to FR1
A.14.2.1.6	Inter-frequency SAN distance-based conditional Handover from FR1 to FR1
A.14.3.1.1	NR UE Transmit Timing Test for FR1
A.14.5.1.1	SA event triggered reporting tests without gap under non-DRX
A.14.5.1.2	SA event triggered reporting tests without gap under DRX
A.14.5.1.3	SA event triggered reporting tests without gap under non-DRX with SSB index reading
A.14.5.1.4	SA event triggered reporting tests with single measurement gap under non-DRX for satellite access

A.14.5.1.5	SA event triggered reporting tests with FNO concurrent gaps under DRX for satellite access
A.14.5.1.6	SA event triggered reporting tests with PPO concurrent gaps under non-DRX with SSB index reading for satellite access
A.14.5.2.1	Event triggered reporting test without gap under non-DRX
A.14.5.2.2	Event triggered reporting tests without gap under DRX
A.14.6.3.1	SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell
A.14.6.3.2	SA inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell
A.14.6.4.1	SSB based L1-RSRP measurement
A.14.6.4.2	CSI-RS based L1-RSRP measurement on resource set with repetition off

A.3.36.3 Principle of testing different ephemeris formats

Satellite access RRM test cases are defined such that satellite ephemeris information is sent to UE in each test case, according to Tables 14.0.3-1 and 14.0.3-2.

Table A.3.36.3-1: Test cases configuring EphemerisInfo as PositionVelocity

Functional Area	Test Case
RRC_IDLE state mobility	A.14.1.3
	A.14.1.4
	A.14.1.5
	A.14.1.6
	A.14.1.9
Handover	A.14.1.10
	A.14.2.1.3
	A.14.2.1.4
	A.14.2.1.5
Timing	A.14.2.1.6
	A.14.3.1
	A.14.4.1.1
	A.14.4.1.2
Radio Link Monitoring	A.14.4.1.5
	A.14.4.1.6
	A.14.4.2.1
	A.14.4.2.3
BFD and LR procedures	A.14.4.2.5
	A.14.4.3.1
	A.14.4.4.1
Active BWP switch	A.14.4.4.1
UE specific CBW change	A.14.4.5.1
PL-RS switching delay	A.14.5.1.1
Intra-frequency measurements	A.14.5.1.3
	A.14.5.1.5
	A.14.5.2.1
Inter-frequency measurements	A.14.5.2.3
	A.14.5.2.7
	A.14.5.3.1
L1-RSRP measurements	A.14.5.3.3
SS-RSRP accuracy	A.14.6.1.1
SS-RSRQ accuracy	A.14.6.2.1
SS-SINR accuracy	A.14.6.3.1
L1-RSRP accuracy	A.14.6.4.1

Table A.3.36.3-2: Test cases configuring EphemerisInfo as Orbital

Functional Area	Test Case
RRC_IDLE state mobility	A.14.1.1.1
	A.14.1.1.2
	A.14.1.1.5
	A.14.1.1.6
Handover	A.14.2.1.1
	A.14.2.1.2
RRC Connection Mobiliy Control	A.14.2.2.1
	A.14.2.2.2
	A.14.2.2.3
Timing	A.14.3.2
Radio Link Monitoring	A.14.4.1.3
	A.14.4.1.4
	A.14.4.1.7
	A.14.4.1.8
BFD and LR procedures	A.14.4.2.2
	A.14.4.2.4
	A.14.4.2.6
Active BWP switch	A.14.4.3.2
Intra-frequency measurements	A.14.5.1.2
	A.14.5.1.4
	A.14.5.1.6
Inter-frequency measurements	A.14.5.2.2
	A.14.5.2.4
	A.14.5.2.6
	A.14.5.2.8
L1-RSRP measurements	A.14.5.3.2
	A.14.5.3.4
SS-RSRP accuracy	A.14.6.1.2
SS-RSRQ accuracy	A.14.6.2.2
SS-SINR accuracy	A.14.6.3.2
L1-RSRP accuracy	A.14.6.4.2

A.3.36.4 General setup for SIB19

The general parameters for SIB19 setup is specified in Table A.3.36.4-1.

Table A.3.36.4-1: Test cases for NTN specific requirements

Parameter	Unit	Test 1
Interval between adjacent epoch time	s	LEO: 2.56 GEO: 10.24
ntn-UISyncValidityDuration	s	LEO: 5 GEO: 900
cellSpecificKOffset	slot	LEO: 14 GEO: 258
kmac	slot	Not configured
ta-Common		0
ta-CommonDrift		0
ta-CommonDriftVariant		0
ntn-PolarizationDL		linear
ntn-PolarizationUL		linear
ephemerisInfo		Detailed ephemeris information is provided in TS 38.508-1 [37]

ta-Report		Not configured
-----------	--	----------------

A.3.36.5 Satellite specific parameters configuration

A.3.36.5.1 Satellite specific configuration for serving cell

Table A.3.36.5.1-1: Satellite specific configuration pattern 1 for serving cell in GSO scenario

Parameter	SSC.1
Interval between adjacent epoch time	10.24s
ntn-UISyncValidityDuration	900s
cellSpecificKoffset	258 slots
ta-Common	0
ta-CommonDrift	0
ta-CommonDriftVariant	0
ntn-PolarizationDL	linear
ntn-PolarizationUL	linear
ephemerisInfo	Detailed ephemeris information is provided in TS 38.508-1 [37]

Table A.3.36.5.1-2: Satellite specific configuration pattern 2 for serving cell in NGSO scenario

Parameter	SSC.2
Interval between adjacent epoch time	2.56s
ntn-UISyncValidityDuration	5s
cellSpecificKoffset	14 slots
ta-Common	0
ta-CommonDrift	0
ta-CommonDriftVariant	0
ntn-PolarizationDL	linear
ntn-PolarizationUL	linear
ephemerisInfo	Detailed ephemeris information is provided in TS 38.508-1 [37]

A.3.36.5.2 Satellite specific configuration for neighbour cell

Table A.3.36.5.2-1: Satellite specific configuration pattern 1 for neighbour cell in GSO scenario

Parameter	NSC.1
Interval between adjacent epoch time	10.24s
ntn-UISyncValidityDuration	900s
cellSpecificKoffset	258 slots
ta-Common	0
ta-CommonDrift	0
ta-CommonDriftVariant	0
ntn-PolarizationDL	linear
ntn-PolarizationUL	linear
ephemerisInfo	Detailed ephemeris information is provided in TS 38.508-1 [37]

Table A.3.36.5.2-2: Satellite specific configuration pattern 2 for neighbour cell in NGSO scenario

Parameter	NSC.2
Interval between adjacent epoch time	2.56s
ntn-UISyncValidityDuration	5s
cellSpecificOffset	14 slots
ta-Common	0
ta-CommonDrift	0
ta-CommonDriftVariant	0
ntn-PolarizationDL	linear
ntn-PolarizationUL	linear
ephemerisInfo	Detailed ephemeris information is provided in TS 38.508-1 [37]

A.4 EN-DC tests with all NR cells in FR1

A.4.1 Void

A.4.2 Void

A.4.3 RRC_CONNECTED state mobility

A.4.3.1 Void

A.4.3.2 RRC Connection Mobility Control

A.4.3.2.1 Void

A.4.3.2.2 Random Access

A.4.3.2.2.1 4-step RA type contention based random access test in FR1 for PSCell in EN-DC

A.4.3.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.2 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell in FR1. Supported test parameters are shown in Table A.4.3.2.2.1.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.4.3.2.2.1.1-2.

Table A.4.3.2.2.1.1-1: Supported test configurations for contention based random access test in FR1 for PSCell in EN-DC

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table A.4.3.2.2.1.1-2: General test parameters for contention based random access test in FR1 for PSCell in EN-DC

Parameter	Unit	Test-1	Comments
SSB Configuration	Config 1,2	SSB pattern 3 in FR1	As defined in A.3.10
	Config 3,4	SSB pattern 4 in FR1	
Duplex Mode for Cell 2	Config 1,2	FDD	
	Config 3,4	TDD	
TDD Configuration	Config 3,4	TDDConf.2.1	
OCNG Pattern ^{Note 1}		OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters	Config 1,2	SR.1.1 FDD	As defined in A.3.1.1.

Note 4		Config 3,4		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,2			CR.1.1 FDD	
	Config 3,4			CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,2			CCR.1.1 FDD	
	Config 3,4			CCR.2.1 TDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1,2	dBm/15kHz	-98	
		Config 3,4		-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP ^{Note 3}		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1,2	dBm/15kHz	-98	
		Config 3,4		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP ^{Note 3}		dBm/ SCS	-115	
I_o ^{Note 2}		Config 1,2	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 3,4		-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{C_{MAX, f, c}}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 1	As defined in A.3.8.2.
Propagation Condition			-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.					
Note 2: SS-RSRP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purpose. They are not settable parameters.					
Note 3: Void					
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.					

A.4.3.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.4.3.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4, the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission..

A.4.3.2.2.1.2.5 Void

A.4.3.2.2.1.2.6 Void

A.4.3.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.4.3.2.2.2 4-step RA type n on-contention based random access test in FR1 for PSCell in EN-DC

A.4.3.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.2 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell in FR1. Supported test parameters are shown in Table A.4.3.2.2.2.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.4.3.2.2.2.1-2 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.4.3.2.2.2.1-1: Supported test configurations for non-contention based random access test in FR1 for PSCell in EN-DC

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.4.3.2.2.2.1-2: General test parameters for non-contention based random access test in FR1 for PSCell in EN-DC

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1,2		SSB pattern 3 in FR1	SSB pattern 3 in FR1	As defined in A.3.10
	Config 3,4		SSB pattern 4 in FR1	SSB pattern 4 in FR1	
CSI-RS Configuration	Config 1,2		N/A	CSI-RS.1.1 FDD	As defined in A.3.1.4
	Config 3,4			CSI-RS.2.1 TDD	
Duplex Mode for Cell 2	Config 1,2		FDD	FDD	
	Config 3,4		TDD	TDD	
TDD Configuration	Config 3,4		TDDConf.2.1	TDDConf.2.1	
OCNG Pattern ^{Note 1}			OCNG pattern 1	OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters ^{Note 4}	Config 1,2		SR.1.1 FDD	SR.1.1 FDD	As defined in A.3.1.1.
	Config 3,4		SR.2.1 TDD	SR.2.1 TDD	

RMSI CORESET Reference Channel		Config 1,2		CR.1.1 TDD	CR.1.1 TDD	
		Config 3,4		CR.2.1 TDD	CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,2		CCR.1.1 TDD	CCR.1.1 TDD	
		Config 3,4		CCR.2.1 TDD	CCR.2.1 TDD	
NR RF Channel Number				1	1	
EPRE ratio of PSS to SSS			dB	0	0	
EPRE ratio of PBCH_DMRS to SSS			dB			
EPRE ratio of PBCH to PBCH_DMRS			dB			
EPRE ratio of PDCCH_DMRS to SSS			dB			
EPRE ratio of PDCCH to PDCCH_DMRS			dB			
EPRE ratio of PDSCH_DMRS to SSS			dB			
EPRE ratio of PDSCH to PDSCH_DMRS			dB			
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	3	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1,2	dBm/15kHz	-98	-98	
		Config 3,4		-101	-101	
	$\hat{E}_s / N_{oc}$		dB	3	3	
	SS-RSRP ^{Note 3}		dBm/ SCS	-95	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	-17	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1,2	dBm/15kHz	-98	-98	
		Config 3,4		-101	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	-17	
	SS-RSRP ^{Note 3}		dBm/ SCS	-115	-115	
I_o ^{Note 2}		Config 1,2	dBm	-65.3/9.36MHz	-65.3/9.36MHz	For symbols without SSB index 1
		Config 3,4		-62.2/38.16MHz	-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{C_{MAX, f, c}}$)			dBm	23	23	As defined in clause 6.2.4 in TS 38.101- 1.
PRACH Configuration				FR1 PRACH configuration 2	FR1 PRACH configuration 3	As defined in A.3.8.2.
Propagation Condition			-	AWGN	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.						
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.						
Note 3: Void						
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.						

A.4.3.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.4.3.2.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.1 for SSB-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-2, to test the UE behavior specified in Clause 6.2.2.2.1 for CSI-RS-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.3 2-step RA type contention based random access test in FR1 for PSCell in EN-DC

A.4.3.2.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.3 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell in FR1. Supported test parameters are shown in Table A.4.3.2.2.3.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.4.3.2.2.3.1-2.

Table A.4.3.2.2.3.1-1: Supported test configurations for 2-step RA type contention based random access test in FR1 for PSCell in EN-DC

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table A.4.3.2.2.3.1-2: General test parameters for 2-step RA type contention based random access test in FR1 for PSCell in EN-DC

Parameter	Unit	Test-1	Comments
SSB Configuration	Config 1,2	SSB pattern 3 in FR1	As defined in A.3.10
	Config 3,4	SSB pattern 4 in FR1	
Duplex Mode for Cell 2	Config 1,2	FDD	
	Config 3,4	TDD	
TDD Configuration	Config 3,4	TDDConf.2.1	
OCNG Pattern ^{Note 1}		OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters ^{Note 3}	Config 1,2	SR.1.1 FDD	As defined in A.3.1.1.
	Config 3,4	SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,2	CR.1.1 FDD	
	Config 3,4	CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,2	CCR.1.1 FDD	
	Config 3,4	CCR.2.1 TDD	

NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured <i>msgA-RSRP-ThresholdSSB</i>
	N_{oc}	Config 1,2	dBm/15kHz	-98	
		Config 3,4		-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP ^{Note 2}		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured <i>msgA-RSRP-ThresholdSSB</i>
	N_{oc}	Config 1,2	dBm/15kHz	-98	
		Config 3,4		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP ^{Note 2}		dBm/ SCS	-115	
Io		Config 1,2	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 3,4		-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{C_{MAX}, f, c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 1	As defined in A.3.20.2.1.
<i>msgA-RSRP-ThresholdSSB</i>			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Propagation Condition			-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.					
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.					
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.					

A.4.3.2.2.3.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.4.3.2.2.3.2.1 MsgA Transmission

To test the UE behaviour specified in Clause 6.2.2.3.1.1 the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB*.

In addition, the power applied to all MsgA transmission shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first MsgA preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS

38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be 3 dB lower than first MsgA PRACH power for test configuration 1 & 2 and same as first MsgA PRACH power for test configuration 3 & 4 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.3.2.2 MsgB Reception

To test the UE behaviour specified in Clause 6.2.2.3.1.2 the System Simulator shall transmit a MsgB with fallbackRAR containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all MsgA transmission shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first MsgA preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be 3 dB lower than first MsgA PRACH power for test configuration 1 & 2 and same as first MsgA PRACH power for test configuration 3 & 4 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.3.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.1.3 the System Simulator shall transmit a MsgB with fallbackRAR containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmission shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first MsgA preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be 3 dB lower than first MsgA PRACH power for test configuration 1 & 2 and same as first MsgA PRACH power for test configuration 3 & 4 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.4 2-step RA type n on-contention based random access test in FR1 for PSCell in EN-DC

A.4.3.2.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.3 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell in FR1. Supported test parameters are shown in Table A.4.3.2.2.4.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.4.3.2.2.4.1-2.

Table A.4.3.2.2.4.1-1: Supported test configurations for non-contention based random access test for 2-step RA type in FR1 for PSCell in EN-DC

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.4.3.2.2.4.1-2: General test parameters for non-contention based random access test for 2-step RA type in FR1 for PSCell in EN-DC

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1,2		SSB pattern 3 in FR1	As defined in A.3.10
	Config 3,4		SSB pattern 4 in FR1	
Duplex Mode for Cell 2	Config 1,2		FDD	
	Config 3,4		TDD	
TDD Configuration	Config 3,4		TDDConf.2.1	
OCNG Pattern ^{Note 1}			OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters ^{Note 3}	Config 1,2		SR.1.1 FDD	As defined in A.3.1.1.
	Config 3,4		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 TDD	
	Config 3,4		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 TDD	
	Config 3,4		CCR.2.1 TDD	
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	Power of SSB with index 0 is set to be above configured <i>msgA-RSRP-ThresholdSSB</i>
	N_{oc}	Config 1,2	dBm/15kHz	
		Config 3,4	z	
	$\hat{E}_s / N_{oc}$		dB	
SS-RSRP		dBm/ SCS	-95	

SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured <i>msgA-RSRP-ThresholdSSB</i>
	N_{oc}	Config 1,2	dBm/15kHz	-98	
		Config 3,4		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/SCS	-115	
Io ^{Note 2}		Config 1,2	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 3,4		-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 2	As defined in A.3.20.2.
<i>msgA-RSRP-ThresholdSSB</i>			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Propagation Condition			-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: SS-RSRP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purpose. They are not settable parameters. Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.					

A.4.3.2.2.4.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.4.3.2.2.4.2.1 MsgA Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.3.2.1 for MsgA transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

In addition, the power applied to all MsgA transmission shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be 3 dB lower than first MsgA PRACH power for test configuration 1 & 2 and same as first MsgA PRACH power for test configuration 3 & 4 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.2.4.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.2.2 the System Simulator shall transmit a MsgB containing a successRAR MAC subPDU corresponding to the transmitted Random Access Preamble after 5 MsgA transmissions

have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB if the MsgB contains a successRAR MAC subPDU corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated MsgA transmission power if Random Access Responses Reception has not been considered as successful.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be 3 dB lower than first MsgA PRACH power for test configuration 1 & 2 and same as first MsgA PRACH power for test configuration 3 & 4 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.4.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.2.3 the System Simulator shall transmit a MsgB corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA*.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be 3 dB lower than first MsgA PRACH power for test configuration 1 & 2 and same as first MsgA PRACH power for test configuration 3 & 4 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.4.3.2.3 Void

A.4.3.3 Handover with PSCell from EN-DC to EN-DC with known target PSCell in FR1

A.4.3.3.1 Test Purpose and Environment

This test is to verify the requirement for E-UTRA intra frequency handover with NR FR1 PSCell change specified in clause 5.8 in E-UTRA RRM specification [15] for the case when the target PSCell is known by the UE. Supported test configurations are shown in table A.4.3.3.1-1.

The general test parameters are given in Table A.4.3.3.1-2. E-UTRA cells and NR cells specific test parameters are given in Table A.4.3.3.1-3 and A.4.3.3.1-4. In the test there are four cells: Cell1 and Cell2 are PCell and target PCell on E-UTRA carrier, Cell3 and Cell4 are PSCell and target PSCell on NR FR1 carrier. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. Before the test starts the UE is connected to Cell1 (E-UTRA PCell) and Cell3 (NR PSCell) with EN-DC mode. At the start of time duration T1, the UE has not any timing information of cell 2 and cell 4. During T1, the UE is configured in the measurement control information that event-triggered reporting with Event A3 for neighbour cells on E-UTRA carrier and NR carrier.

The Cell2 and Cell4 becomes known to the UE, and E-UTRA PCell (Cell1) shall send a RRC message implying handover with PSCell to cell 2 and cell4 during T2. The RRC message implying handover with PSCell shall be sent to the UE after the UE has reported Event A3 for SpCells. The start of T3 is defined as the end of the last TTI containing the RRC message implying handover with PSCell.

Table A.4.3.3.1-1: Handover with PSCell from EN-DC to EN-DC test configurations in FR1

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, PSCell FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, PSCell TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, SCell FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, SCell TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.3.3.1-2: General test parameters for Handover with PSCell from EN-DC to EN-DC

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	One is E-UTRA RF channel and one is NR RF channel
Initial conditions	Active PCell		Cell1	On E-UTRA RF channel number 1.
	E-UTRA Neighbouring cell		Cell2	On E-UTRA RF channel number 1.
	Active PSCell		Cell3	On NR RF channel number 1.
	NR Neighbouring cell		Cell4	On NR RF channel number 1.
Final conditions	Active PCell		Cell2	
	Active PSCell		Cell4	
CP length			Normal	Applicable to Cell1, Cell2, Cell3 and Cell4.
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Continuous monitoring of primary cell
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between same RAT cells		μs	3	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	

Table A.4.3.3.1-3: E-UTRAN cell specific test parameters for Handover with PSCell from EN-DC to EN-DC

Parameter	Unit	Cell1			Cell2		
		T1	T2	T3	T1	T2	T3
Duplex mode		FDD or TDD			FDD or TDD		

TDD special subframe configuration ^{Note1}		6			6		
TDD uplink-downlink configuration ^{Note1}		1			1		
BW _{channel}		5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100			5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100		
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD			5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD			5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns defined in A.3.2.1 (FDD) and in A.3.2.2(TDD) ^{Note2}		5 MHz: OP.20 FDD 10MHz: OP.1 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	OP.18 FDD OP.2 FDD OP.14 FDD OP.10 TDD OP.2 TDD OP.8 TDD		5MHz: OP.18 FDD 10MHz: OP.2 FDD 20MHz: OP.14 FDD 5MHz: OP.10 TDD 10MHz: OP.2 TDD 20MHz: OP.8 TDD	OP.20 FDD OP.1 FDD OP.17 FDD OP.9 TDD OP.1 TDD OP.7 TDD	
PRACH configuration		-			4, As specified in table 5.7.1-2 in TS 36.211		
PBCH_RA	dB	0			0		
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB						
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note3}	dB						
OCNG_RB ^{Note3}	dB						
N _{oc} ^{Note4}	dBm/15 kHz	-98					
Ê _s /N _{oc}	dB	8	8	8	-infinite	11	11
Ê _s /I _{ot}	dB	8	-3.3	-3.3	-infinite	2.36	2.36
RSRP ^{Note5}	dBm/15 kHz	-90	-90	-90	-infinite	-87	-87
SCH_RP ^{Note5}	dBm/15 kHz	-90	-90	-90	-infinite	-87	-87
I _o ^{Note5}	dBm/Ch BW	-61.58+10·log(N _{RB,c} /50)	-57.23+10·log(N _{RB,c} /50)		-61.58+10·log(N _{RB,c} /50)	-57.23+10·log(N _{RB,c} /50)	
Propagation Condition		AWGN					
Antenna Configuration		1x2					

Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5:	E_s/I_{ot} , RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.4.3.3.1-4: NR cell specific test parameters for Handover with PSCell from EN-DC to EN-DC

Parameter		Unit	Cell 3			Cell 4		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1, 4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1, 4		Not Applicable					
	Config 2, 5		TDDConf.1.1					
	Config 3, 6		TDDConf.2.1					
BW _{channel}	Config 1,2,4,5	MHz	10: N _{RB,c} = 52					
	Config 3,6		40: N _{RB,c} = 106					
BWP BW	Config 1,2,4,5	MHz	10: N _{RB,c} = 52					
	Config 3,6		40: N _{RB,c} = 106					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD					
	Config 2,5		SR.1.1 TDD					
	Config 3,6		SR.2.1 TDD					
CORESET Reference Channel	Config 1,4		CR.1.1 FDD					
	Config 2,5		CR.1.1 TDD					
	Config 3,6		CR.2.1 TDD					
TRS configuration	Config 1,4		TRS.1.1 FDD					
	Config 2,5		TRS.1.1 TDD					
	Config 3,6		TRS.1.2 TDD					
OCNG Patterns			OP.1					
SMTc Configuration			SMTc.1					
SSB Configuration	Config 1,2,4,5		SSB.1 FR1					
	Config 3,6		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz					
	Config 3,6		30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz					
	Config 3,6		30 kHz					
PRACH configuration			FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	0					

EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc}^{Note2}		dBm/15kHz	-98					
N_{oc}^{Note2}	Config 1,2,4,5	dBm/SCS	-98					
	Config 3,6		-95					
$\hat{E}_s / I_{ot}$		dB	8	-3.3	-3.3	-Infinity	2.36	2.36
$\hat{E}_s / N_{oc}$		dB	8	8	8	-Infinity	11	11
SSB_RP	Config 1,2,4,5	dBm/SCS	-90	-90	-90	-Infinity	-87	-87
	Config 3,6	dBm/SCS	-87	-87	-87	-Infinity	-84	-84
I_o^{Note3}	Config 1,2,4,5	dBm/ 9.36MHz	-61.41	-57.06	-57.06	-61.41	-57.06	-57.06
	Config 3,6	dBm/ 38.16MHz	-55.31	-50.96	-50.96	-55.31	-50.96	-50.96
Propagation condition		-	AWGN			AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								

A.4.3.3.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 60 ms from the beginning of time period T3.

The UE shall transmit the PRACH preamble to Cell 4 less than 87 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

The rate of correct PSCell addition observed during repeated tests shall be at least 90%.

NOTE: The handover requirements for handover with PSCell for EN-DC is defined in clause 5.8 in [15] as:

$$D_{HOwithPSCel_PSCell} = T_{RRC_delay} + T_{search} + T_{IU} + T_{processing}$$

Where:

T_{RRC_delay} = 20 ms for 'RRC connection reconfiguration (NR SCG establishment/ /modification/release)'.

T_{search} = 0 ms for known cell.

T_{IU} = 15 ms in the test configuration.

$T_{processing}$ = 25ms for source Cell and target Cell are in the same FR.

This gives a total of 60ms for handover delay.

NOTE: The PSCell change delay for handover with PSCell for EN-DC is defined in clause 5.8 in [15] as:

$$D_{\text{HOwithPSCell_PSCell}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search}} + T_{\Delta} + T_{\text{PSCell_DU}} + T_{\text{PCell_DU}} + 2 \text{ ms}$$

Where:

$T_{\text{RRC_delay}} = 20 \text{ ms}$ for ‘RRC connection reconfiguration (NR SCG establishment/ /modification/release)’.

$T_{\text{processing}} = 25\text{ms}$ for source Cell and target Cell are in the same FR.

$T_{\text{search}} = 0 \text{ ms}$ for known cell.

$T_{\Delta} = 20 \text{ ms}$ for fine time tracking and acquiring full timing information of the target cell. 1 SMTC period.

$T_{\text{PSCell_DU}} = 20 \text{ ms}$ based on PSCell addition test in TS38.133 A.4.5.7.

$T_{\text{PCell_DU}} = 0 \text{ ms}$, no clolliding with PCell RACH.

This gives a total of 87ms for handover delay.

A.4.4 Timing

A.4.4.1 UE transmit timing

A.4.4.1.1 NR UE Transmit Timing Test for FR1

A.4.4.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeB and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2. Supported test configurations are shown in Table 4.4.1.1.1-1.

Table A.4.4.1.1.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	LTE FDD, NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	LTE FDD, NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
4	LTE TDD, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
5	LTE TDD, NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
6	LTE TDD, NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

The test consists of E-UTRA PCell and NR PSCell. The configuration for E-UTRA is given in A.3.7.2.1. Table A.4.4.1.1.1-2 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.4.4.1.1.1-3.

Table A.4.4.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2	Band Group
SSB ARFCN		1,2,3,4,5,6	Freq1	Freq1	

Duplex Mode		1,4	FDD		
		2,3,5,6	TDD		
TDD configuration		1,4	Not Applicable		
		2,5	TDDConf.1.1		
		3,6	TDDConf.2.1		
BW _{channel}	MHz	1,4	10: N _{RB,c} = 52		
		2,5	10: N _{RB,c} = 52		
		3,6	40: N _{RB,c} = 106		
Initial BWP Configuration		1,2,3,4,5,6	DLBWP.0.1 ULBWP.0.1		
Dedicated BWP Configuration		1,2,3,4,5,6	DLBWP.1.1 ULBWP.1.1		
DRx Cycle	ms	1,2,3,4,5,6	N/A	DRX.8 ^{Note5}	
PDSCH Reference measurement channel		1,4	SR.1.1 FDD		
		2,5	SR.1.1 TDD		
		3,6	SR.2.1 TDD		
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD		
		2,5	CR.1.1 TDD		
		3,6	CR.2.1 TDD		
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD		
		2,5	CCR.1.1 TDD		
		3,6	CCR.2.1 TDD		
OCNG Patterns		1,2,3,4,5,6	OP.1		
SSB configuration		1,4	SSB.1 FR1		
		2,5	SSB.1 FR1		
		3,6	SSB.2 FR1		
SMTC configuration		1,2,3,4,5,6	SMTC.2		
TRS configuration		1,4	TRS.1.1 FDD		
		2,5	TRS.1.1 TDD		
		3,6	TRS.1.2 TDD		
PDSCH/PDCCH subcarrier spacing	kHz	1,2,4,5	15		
		3,6	30		
EPRE ratio of PSS to SSS	dB	1,2,3,4,5,6	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc}^{Note2}	dBm/15 kHz	1,2,3,4,5,6	-98	-98	
N_{oc}^{Note2}	dBm/SCS	1,2,4,5	-98	-98	
		3,6	-95	-95	
$\hat{E}_s/I_{ot}$		1,2,3,4,5,6	3	3	
$\hat{E}_s/N_{oc}$		1,2,3,4,5,6	3	3	

SS-RSRP ^{Note3}	dBm/SCS	1,2,4,5	-95	-95	
		3,6	-92	-92	
I _o ^{Note3}	dBm/9.36MHz	1,2,4,5	-65.2	-65.2	
	dBm/38.1MHz	3,6	-59.2	-59.2	
Propagation condition		1,2,3,4,5,6	AWGN		
SRS Config		1,2,4,5	SRSCConf.1 ^{Note6}	SRSCConf.3 ^{Note6}	
		3, 6	SRSCConf.1 ^{Note6}	SRSCConf.2 ^{Note6}	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: DRx related parameters are given in Table A.3.3.8-1 Note 6: SRS configs are given in Table A.4.4.1.1.1-3					

Table A.4.4.1.1.1-3: SRS Configuration for Timing Accuracy Test

	Field	SRSCConf.1	SRSCConf.2	SRSCConf.3	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	0	
	srs-ResourceIdList	0	0	0	
	resourceType	Periodic	Periodic	Periodic	
	Usage	Codebook	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	0	
	nrofSRS-Ports	Port1	Port1	Port1	
	transmissionComb	n2	n2	n2	
	combOffset-n2	0	0	0	
	cyclicShift-n2	0	0	0	
	resourceMapping startPosition	0	0	0	
	resourceMapping nrofSymbols	n1	n1	n1	
	resourceMapping repetitionFactor	n1	n1	n1	
	freqDomainPosition	0	0	0	
	freqDomainShift	0	0	0	
	freqHopping c-SRS	14 for test configuration 1,2,4,5 25 for test configuration 3,6	25	14	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	0	
	freqHopping b-hop	0	0	0	
	groupOrSequenceHopping	Neither	Neither	Neither	
	resourceType	Periodic	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl640, 5	sl320, 3	Offset to align with DRx periodicity
	sequenceId	0	0	0	Any 10 bit number

A.4.4.1.1.2 Test requirements

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test

- 1) Set up E-UTRA PCell according to parameters given in Table A.3.7.2.1-1 and setup NR PSCell according to parameters given in Table A.4.4.1.1.1-1.
- 2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.
 - a. The N_{TA} offset value (in T_c units) is 25600
 - b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1
- 3) The test system shall adjust the timing of the DL path by values given in Table A.4.4.1.1.2-1

Table A.4.4.1.1.2-1: Adjustment Value for DL Timing

SCS of SSB signals (kHz)	Adjustment Value	
	Test1	Test2
15	+64*64T _c	+32*64T _c
30	+32*64T _c	+16*64T _c

- 4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Clause 7.1.2 Table 7.1.2.1-1 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first detected path (in time) of DL SSB. Skip this step for test 2 with DRX configured.
- 5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

A.4.4.2 UE timer accuracy

A.4.4.3 Timing advance

A.4.4.3.1 EN-DC FR1 timing advance adjustment accuracy

A.4.4.3.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.4.4.3.1.2 Test Parameters

Supported test configurations are shown in table A.4.4.3.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.4.4.3.1.2-2, A.4.4.3.1.2-3 and A.4.4.3.1.2-4. The configuration of Cell 1 (LTE PCell) is specified in clause A.3.7.2.1.

In all test cases, two cells are used. Cell 1 is the PCell in the primary Timing Advance Group (pTAG) and cell 2 is the PSCell in the secondary Timing Advance Group (sTAG). Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands for sTAG are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.4.4.3.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured for PSCell in sTAG.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element for sTAG, as specified in clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance for sTAG used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value specified in table A.4.4.3.1.2-2. This value shall result in changes of the timing advance for sTAG used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in clause 7.3.2.1, the UE adjusts its uplink timing at slot $n+k$ for a timing advance command received in slot n . This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in clause 5.2 in TS 38.321, shall be configured so that it does not expire in the duration of the test.

Table A.4.4.3.1.2-1: Timing advance supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.4.3.1.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		Cell 1: 1 Cell 2: 2	1 for E-UTRAN PCell 2 for NR PSCell
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 15 kHz SCS $N_{TA_new} = N_{TA_old} + 8192 \cdot T_c$ For 30 kHz SCS $N_{TA_new} = N_{TA_old} + 4096 \cdot T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.4.4.3.1.2-3: Cell specific test parameters for timing advance

Parameter		Unit	Test1	
			T1	T2
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	

TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52
	Config 2,5		10: N _{RB,c} = 52
	Config 3,6		40: N _{RB,c} = 106
BWP BW	Config 1,4	MHz	10: N _{RB,c} = 52
	Config 2,5		10: N _{RB,c} = 52
	Config 3,6		40: N _{RB,c} = 106
DRx Cycle		ms	Not Applicable
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OCNG pattern 1
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC configuration	Config 1,2,4,5		SMTC.1 FR1
	Config 3,6		SMTC.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz
	Config 3,6		30 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz
	Config 3,6		30 kHz
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc}^{Note2}		dBm/15kHz	-98
N_{oc}^{Note2}	Config 1,2,4,5	dBm/SCS	-98
	Config 3,6		-95
$\hat{E}_s/I_{ot}$		dB	3
$\hat{E}_s/N_{oc}$		dB	3
Io ^{Note3}	Config 1,2,4,5	dBm/9.36MHz	-67.57
	Config 3,6	dBm/38.16MHz	-62.58
Propagation condition		-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.4.4.3.1.2-4: Sounding Reference Symbol Configuration for timing advance

Field		Value	Comment
c-SRS	Config 1,2,4,5	12	Frequency hopping is disabled
	Config 3,6	24	
b-SRS		0	
b-hop		0	
freqDomainPosition		0	Frequency domain position of SRS
freqDomainShift		0	
groupOrSequenceHopping		neither	No group or sequence hopping
SRS-PeriodicityAndOffset		sl5=2 for SCS 15kHz sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS		ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage		Codebook	Codebook based UL transmission
startPosition		0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols		n1	
repetitionFactor		n1	
combOffset-n2		0	transmissionComb setting
cyclicShift-n2		0	
nrofSRS-Ports		port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].			

A.4.4.3.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value for PSCell in sTAG to the transmission timing at the designated activation time i.e. $k+1$ slots after the reception of the timing advance command, where $k=5$.

The Timing Advance adjustment accuracy for PSCell in sTAG shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.4.5 Signaling characteristics

A.4.5.1 Radio link Monitoring

In the following clause, any uplink signal transmitted by the UE is used for detecting the In-/Out-of-Sync state of the UE. In terms of measurement, the uplink signal is verified on the basis of the UE output power:

For intra-band contiguous carrier aggregation, transmit OFF power is measured as the mean power per component carrier.

For UE with multiple transmit antennas, transmit OFF power is measured as the mean power at each transmit connector.

- UE output power higher than Transmit OFF power -50 dBm (as defined in TS 38.101-3 [20]) means uplink signal
- UE output power equal to or less than Transmit OFF power -50 dBm (as defined in TS 38.101-3 [20]) means no uplink signal.

A.4.5.1.1 Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with SSB-based RLM RS in non-DRX mode

A.4.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR1 PSCell radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.4.5.1.1.1-1. The test parameters are given in Tables A.4.5.1.1.1-2, A.4.5.1.1.1-3, and A.4.5.1.1.1-4 below. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.4.5.1.1.1-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.4.5.1.1.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.1.1-2: General test parameters for FR1 out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
BW _{channel}	Config 1, 4	MHz	10: N _{RB,C} = 52
	Config 2, 5		10: N _{RB,C} = 52
	Config 3, 6		40: N _{RB,C} = 106
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
CORESET	Config 1, 4		CR.1.1 FDD

Reference Channel	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH	Config 1, 2, 4, 5		15 kHz
subcarrier spacing	Config 3, 6		30 kHz
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.1-1
	Config 3, 6		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			
Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.4.5.1.1.1-3: Cell specific test parameters for FR1 (Cell 2) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		

EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15
	Config 2, 5		1	-7	-15
	Config 3, 6		1	-7	-15
N_{oc}	Config 1, 4	dBm/15 kHz	-98		
	Config 2, 5		-98		
	Config 3, 6		-98		
N_{oc}	Config 1, 4	dBm/S CS	-98		
	Config 2, 5		-98		
	Config 3, 6		-95		
Propagation condition			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.					
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.					

Table A.4.5.1.1.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. (Ensure that RLM RS is partially overlapped with measurement gap).	

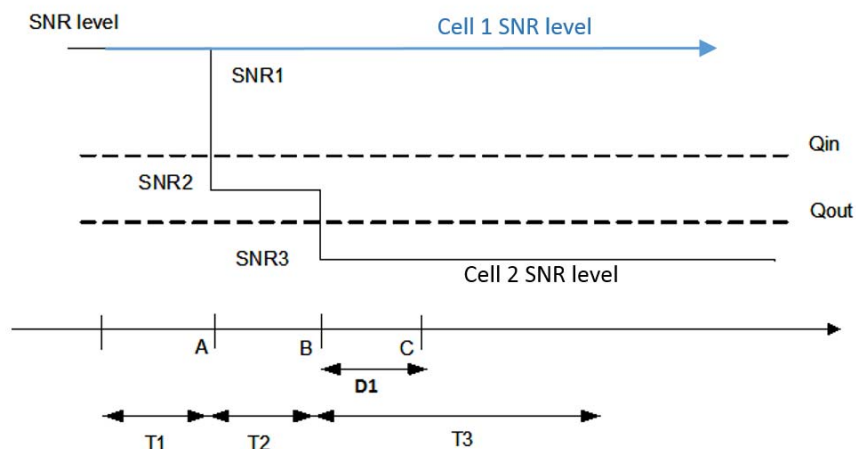


Figure A.4.5.1.1.1-1: SNR variation for out-of-sync testing

A.4.5.1.1.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.2 Radio Link Monitoring In-sync Test for FR1 PSCell configured with SSB-based RLM RS in non-DRX mode

A.4.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR1 PSCell radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.4.5.1.2.1-1. The test parameters are given in Tables A.4.5.1.2.1-2, and A.4.5.1.2.1-3 below. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.1.2.1-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

Table A.4.5.1.2.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.2.1-2: General test parameters for FR1 in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
BW _{channel}	Config 1, 4	MHz	10: N _{RB,c} = 52
	Config 2, 5		10: N _{RB,c} = 52
	Config 3, 6		40: N _{RB,c} = 106
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 kHz
	Config 3, 6		30 kHz
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.1-1
	Config 3, 6		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2

	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
	REG bundle size		6
DRX			<i>OFF</i>
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			
Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.4.5.1.2.1-3: Cell specific test parameters for FR1 (Cell 2) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15	-4.5	1
	Config 2, 5		1	-7	-15	-4.5	1
	Config 3, 6		1	-7	-15	-4.5	1
N_{oc}	Config 1, 4	dBm/15 kHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
N_{oc}	Config 1, 4	dBm/SCS	-98				
	Config 2, 5		-98				
	Config 3, 6		-95				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.4.5.1.2.1-1.							
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.							

Table A.4.5.1.3.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.3.1-2: General test parameters for FR1 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
BW _{channel}	Config 1, 4	MHz	10: N _{RB,C} = 52
	Config 2, 5		10: N _{RB,C} = 52
	Config 3, 6		40: N _{RB,C} = 106
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH	Config 1, 2, 4, 5		15 kHz
subcarrier spacing	Config 3, 6		30 kHz
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.1-1
	Config 3, 6		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync	DCI format		1-0

transmission parameters	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	0.2
T2		s	0.68
T3		s	0.68
D1		s	0.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			
Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.4.5.1.3.1-3: Cell specific test parameters for FR1 (Cell 2) for out-of-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15
	Config 2, 5		1	-7	-15
	Config 3, 6		1	-7	-15
N_{oc}	Config 1, 4	dBm/15k Hz	-98		
	Config 2, 5		-98		
	Config 3, 6		-98		

N_{oc}	Config 1, 4	dBm/SCS	-98
	Config 2, 5		-98
	Config 3, 6		-95
Propagation condition			TDL-C 300ns 100Hz
Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.			
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.			
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.4.5.1.3.1-1.			
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.			

Table A.4.5.1.3.1-4: Void

Table A.4.5.1.3.1-5: Void

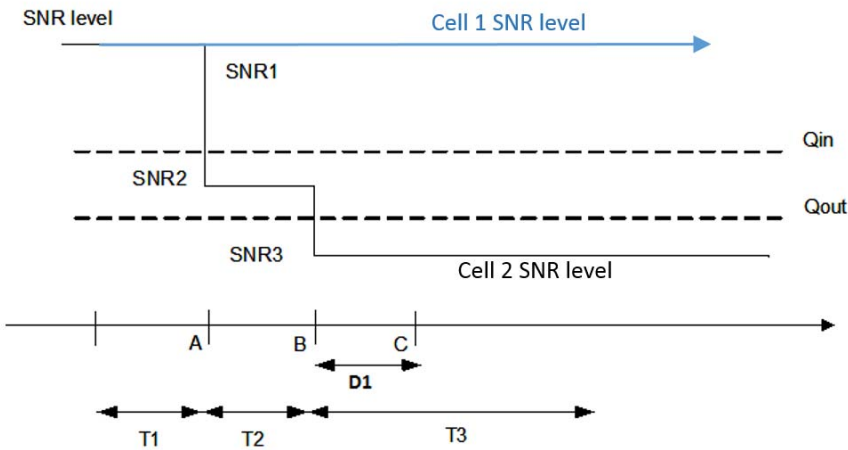


Figure A.4.5.1.3.1-1: SNR variation for out-of-sync testing

A.4.5.1.3.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.4 Radio Link Monitoring In-sync Test for FR1 PSCell configured with SSB-based RLM RS in DRX mode

A.4.5.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.4.5.1.4.1-1. The test parameters are given in Tables A.4.5.1.4.1-2, and A.4.5.1.4.1-3. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.1.4.1-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.4.5.1.4.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.4.1-2: General test parameters for FR1 in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
BW _{channel}	Config 1, 4	MHz	10: N _{RB,c} = 52
	Config 2, 5		10: N _{RB,c} = 52
	Config 3, 6		40: N _{RB,c} = 106
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1

CORESET Reference Channel	Config 3, 6		TDDConf.2.1
	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTTC Configuration	Config 1, 2, 4, 5		SMTTC.1
	Config 3, 6		SMTTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 kHz
	Config 3, 6		30 kHz
PRACH Configuration	Config 1, 2, 4, 5		Table A A.3.8.2.1-1
	Config 3, 6		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD

CSI-RS for tracking	Config 3, 6		CSI-RS.2.1 TDD
	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.64
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			
Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.4.5.1.4.1-3: Cell specific test parameters for FR1 (Cell 2) for in-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15	-4.5	1
	Config 2, 5		1	-7	-15	-4.5	1
	Config 3, 6		1	-7	-15	-4.5	1
N_{oc}	Config 1, 4	dBm/15 kHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
N_{oc}	Config 1, 4	dBm/SCS	-98				
	Config 2, 5		-98				
	Config 3, 6		-95				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.4.5.1.4.1-1.							
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.							

Table A.4.5.1.4.1-4: Void

Table A.4.5.1.4.1-5: Void

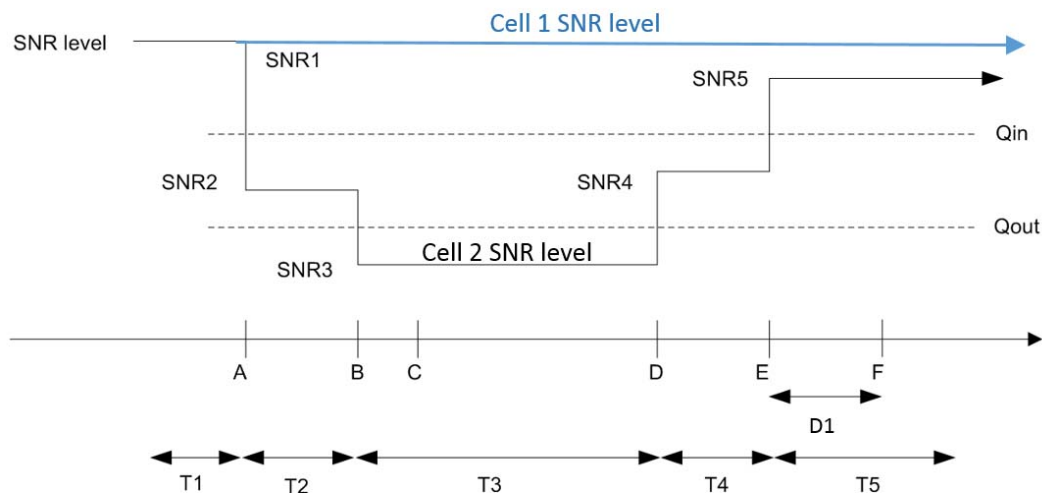


Figure A.4.5.1.4.1-1: SNR variation for in-sync testing

A.4.5.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.5 EN-DC Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with CSI-RS-based RLM in non-DRX mode

A.4.5.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR1 PSCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.4.5.1.5.1-1, A.4.5.1.5.1-2, A.4.5.1.5.1-3, and A.4.5.1.5.1-3A below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.4.5.1.5.1-1 shows the variation of the downlink SNR in the E-UTRAN PCell and the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms). In the test, SSB0 is configured as the BFD-RS.

Table A.4.5.1.5.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.5.1-2: General test parameters for FR1 PSCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
RMC CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTTC Configuration	Config 1, 2, 4, 5		SMTTC.1
	Config 3, 6		SMTTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz
	Config 3, 6		30 KHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2, 5		Resource #4 in TRS.1.1 TDD
	Config 3, 6		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8

	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for reporting	Config 1, 4		CSI-RS1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			
Note 2: E-UTRAN is in non-DRX mode under test.			

Table A.4.5.1.5.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PBCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15
	Config 2, 5		1	-7	-15
	Config 3, 6		1	-7	-15
N_{oc}	Config 1, 4	dBm/15KHz	-98		
	Config 2, 5		-98		
	Config 3, 6		-98		
Propagation condition			TDL-C 300ns 100Hz		

Note 1:	OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS RES.
Note 8:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.1.5.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1..

Table A.4.5.1.5.1-3A: Measurement gap configuration for FR1 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned.	

Table A.4.5.1.5.1-4: Void

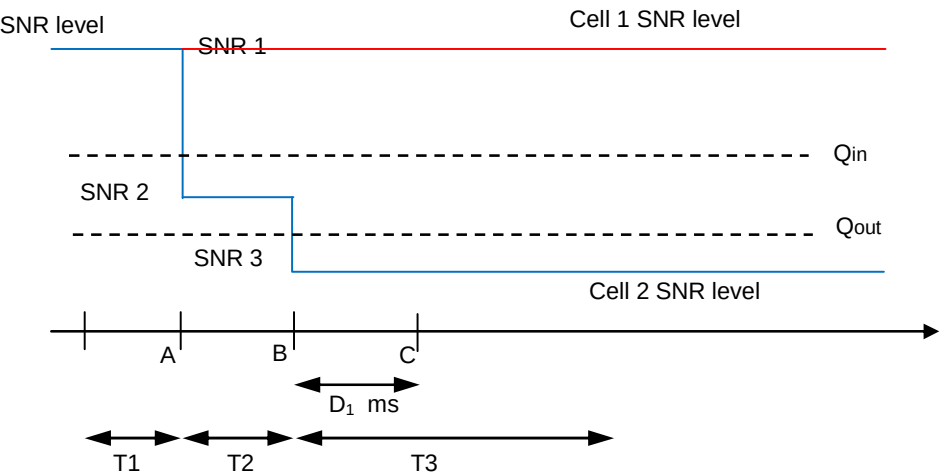


Figure A.4.5.1.5.1-1: SNR variation for CSI-RS out-of-sync testing

A.4.5.1.5.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 (PSCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

The UE shall stop transmitting uplink signal in Cell 2 (PSCell) no later than time point C (D_1 after the start of the time duration T3) on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.6 EN-DC Radio Link Monitoring In-sync Test for FR1 PSCell configured with CSI-RS-based RLM in non-DRX mode

A.4.5.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR1 PSCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.4.5.1.6.1-1, A.4.5.1.6.1-2, and A.4.5.1.6.1-3 below. There are two cells, cell 1 which is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.1.6.1-1 shows the variation of the downlink SNR in the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. In the test, SSB0 is configured as the BFD-RS.

Table A.4.5.1.6.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.6.1-2: General test parameters for FR1 PSCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
RMC CORESET Reference	Config 1, 4		CCR.1.1 FDD

Channel	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz
	Config 3, 6		30 KHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2, 5		Resource #4 in TRS.1.1 TDD
	Config 3, 6		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
T1		s	0.2

T2	s	0.2
T3	s	0.44
T4	s	0.2
T5	s	0.88
T6	s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.		
Note 2: E-UTRAN is in non-DRX mode under test.		

Table A.4.5.1.6.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	0				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB					
EPRE ratio of PSS to SSSPSS_beta		dB					
EPRE ratio of PBCH to PBCH DMRSSSS_beta		dB	0				
EPRE ratio of PDSCH to PDSCH DMRSPDSCH_beta		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15	-4.5	1
	Config 2, 5		1	-7	-15	-4.5	1
	Config 3, 6		1	-7	-15	-4.5	1
Noc	Config 1, 4	dBm/15KHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1:	OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.4.5.1.6.1-1.						
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1..						

Table A.4.5.1.6.1-3A: Void

Table A.4.5.1.6.1-4: Void

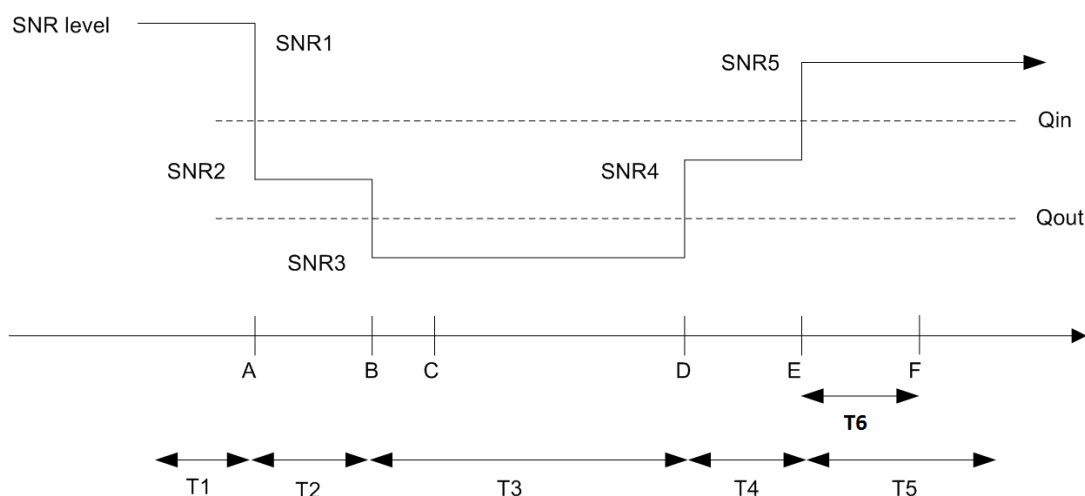


Figure A.4.5.1.6.1-1: SNR variation for CSI-RS in-sync testing

A.4.5.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.7 EN-DC Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with CSI-RS-based RLM in DRX mode

A.4.5.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR1 PSCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.4.5.1.7.1-1, A.4.5.1.7.1-2, and A.4.5.1.7.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.4.5.1.7.1-1 shows the variation of the downlink SNR in the E-UTRAN PCell and the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 is configured as the BFD-RS.

Table A.4.5.1.7.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.7.1-2: General test parameters for FR1 PSCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
RMC CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz
	Config 3, 6		30 KHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2, 5		Resource #4 in TRS.1.1 TDD
	Config 3, 6		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8

	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			
Note 2: E-UTRAN is in non-DRX mode under test.			

Table A.4.5.1.7.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB	0		
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB			
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PBCH to PBCH DMRSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMR		dB			
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15
	Config 2, 5		1	-7	-15
	Config 3, 6		1	-7	-15
N_{oc}	Config 1, 4	dBm/15KHz	-98		
	Config 2, 5		-98		
	Config 3, 6		-98		

Propagation condition	TDL-C 300ns 100Hz
Note 1:	OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.1.7.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1..

Table A.4.5.1.7.1-3A: Void

Table A.4.5.1.7.1-4: Void

Table A.4.5.1.7.1-5: Void

Table A.4.5.1.7.1-6: Void

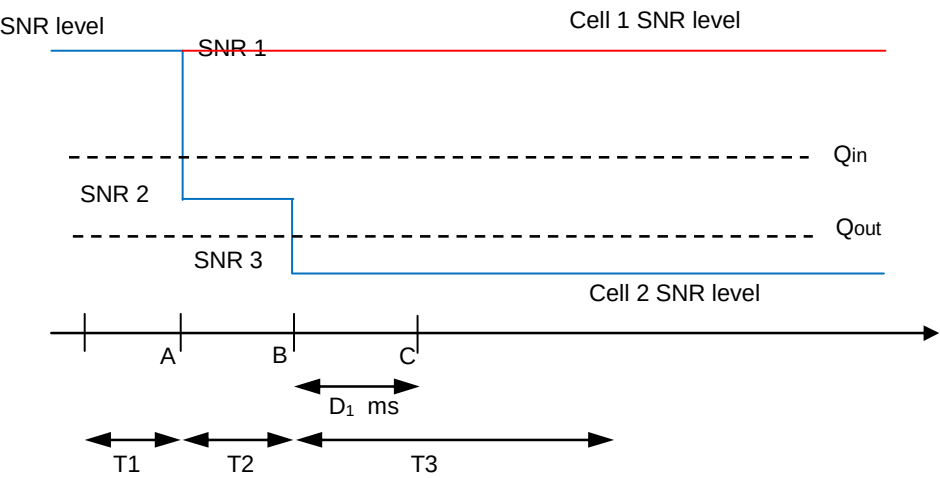


Figure A.4.5.1.7.1-1: SNR variation for CSI-RS out-of-sync testing

A.4.5.1.7.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 (PSCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

The UE shall stop transmitting uplink signal in Cell 2 (PSCell) no later than time point C (D_1 after the start of the time duration T3) on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.8 EN-DC Radio Link Monitoring In-sync Test for FR1 PSCell configured with CSI-RS-based RLM in DRX mode

A.4.5.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR1 PSCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.4.5.1.8.1-1, A.4.5.1.8.1-2, A.4.5.1.8.1-3 and A.4.5.1.8.1-3A below. There are two cells, cell 1 which is the E-UTRAN PCell, and cell 2 is the NR PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.1.8.1-1 shows the variation of the downlink SNR in the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity defined in CSI-RS configuration. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms). In the test, SSB0 is configured as the BFD-RS.

Table A.4.5.1.8.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.8.1-2: General test parameters for FR1 PSCell for CSI-RS in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
RMC CORESET Reference	Config 1, 4		CCR.1.1 FDD

Channel	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTTC Configuration	Config 1, 2, 4, 5		SMTTC.1
	Config 3, 6		SMTTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz
	Config 3, 6		30 KHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2, 5		Resource #4 in TRS.1.1 TDD
	Config 3, 6		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	2000
T311 timer		ms	1000


N310		1
N311		1
CSI-RS for reporting	Config 1, 4	CSI-RS.1.1 FDD
	Config 2, 5	CSI-RS.1.1 TDD
	Config 3, 6	CSI-RS.2.1 TDD
T1	s	0.2
T2	s	0.2
T3	s	1.24
T4	s	0.2
T5	s	1.88
T6	s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.		
Note 2: E-UTRAN is in non-DRX mode under test.		

Table A.4.5.1.8.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	0				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB	0				
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB					
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB					
EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 4	dB					
	Config 2, 5		1	-7	-15	-4.5	1
	Config 3, 6		1	-7	-15	-4.5	1
Noc	Config 1, 4	dBm/15KHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.4.5.1.8.1-1.							
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.							

Field	Test 1
	Value
gapOffset	0
Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned.	

Table A.4.5.1.8.1-6: Void

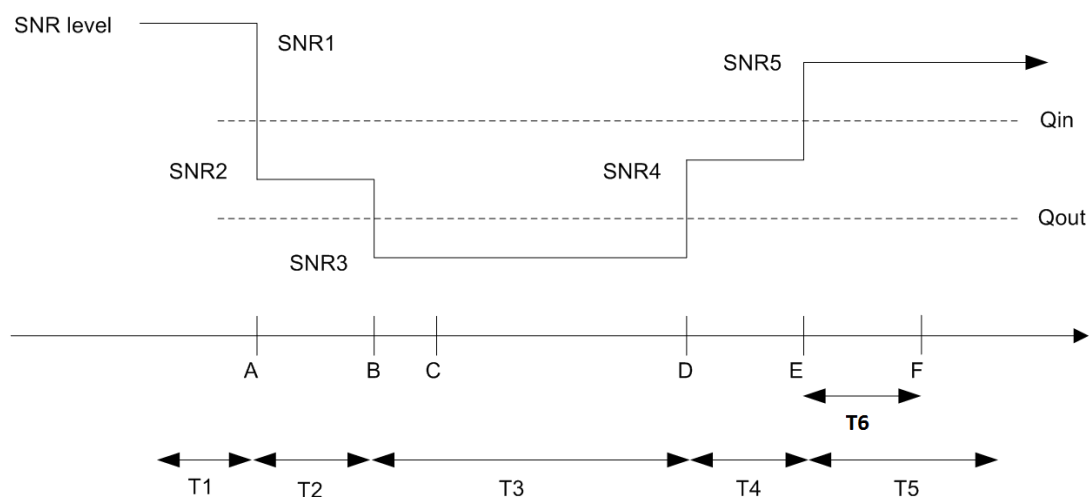

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.1.9 Radio Link Monitoring Out-of-sync Test for FR1 PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

A.4.5.1.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements specified in clause 8.1.2.4 for UE fulfilling good serving cell quality criterion and low mobility criterion, if configured.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to ‘*rlf*’. Supported test configurations are shown in table A.4.5.1.9.1-1. The test parameters are given in Tables A.4.5.1.9.1-2 and A.4.5.1.9.1-3. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.4.5.1.9.1-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.4.5.1.9.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.1.9.1-2: General test parameters for FR1 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
BWchannel	Config 1, 4	MHz	10: NRB,c = 52
	Config 2, 5		10: NRB,c = 52
	Config 3, 6		40: NRB,c = 106
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1

UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 kHz
	Config 3, 6		30 kHz
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.1-1
	Config 3, 6		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2, 5		CSI-RS.1.1 TDD
	Config 3, 6		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	5.2
T2		s	0.68
T3		s	2.48
D1		s	2.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Note 3: E-UTRAN is in non-DRX mode under test.
--

Table A.4.5.1.91-3: Cell specific test parameters for FR1 (Cell 2) for out-of-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1	1	-15
	Config 2, 5		1	1	-15
	Config 3, 6		1	1	-15
N_{oc}	Config 1, 4	dBm/15k Hz	-98		
	Config 2, 5		-98		
	Config 3, 6		-98		
N_{oc}	Config 1, 4	dBm/SCS	-98		
	Config 2, 5		-98		
	Config 3, 6		-95		
goodServingCellEvaluationRLM			configured		
offset in goodServingCellEvaluationRLM		dB	Not configured		
goodServingCellEvaluationRLM		dB	0		
s-SearchDeltaP-Connected		dB	3		
t-SearchDeltaP-Connected		s	5		
Propagation condition			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.					
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.					
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.4.5.1.9.1-1.					
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.					

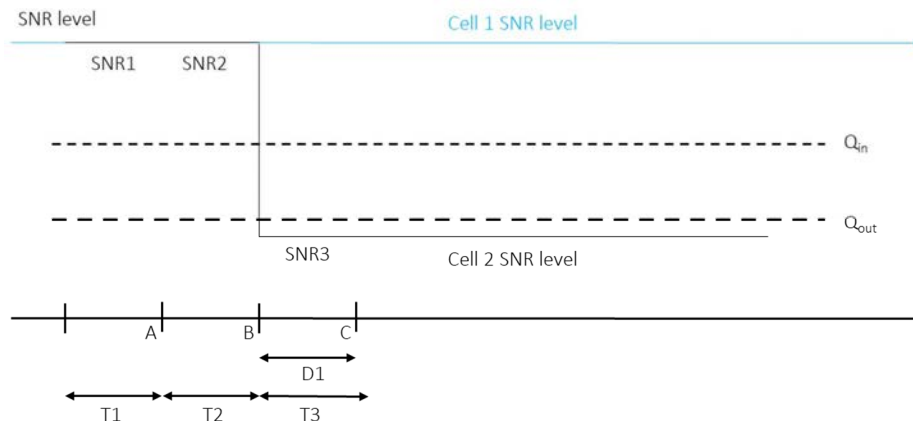


Figure A.4.5.1.9.1-1: SNR variation for out-of-sync testing

A.4.5.1.9.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2 Interruption

A.4.5.2.1 E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

A.4.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that when LTE PCell is in DRX and NR PSCell is in non-DRX, NR PSCell interruptions due to transitions from active to non-active and from non-active to active during LTE PCell DRX the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC specified in TS38.133 clause 8. 2.1.2. Supported test configurations are shown in table A.4.5.2.1.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.1.1-2 and A.4.5.2.1.1-3. The E-UTRAN PCell DRX configuration parameters are given in Table A.4.5.2.1.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are two cells: Cell1 and Cell2. Cell1 is LTE PCell and Cell2 is NR FR1 PSCell. The test consists of one time period, with duration of T1. During T1, NR PSCell is continuously scheduled in DL while LTE PCell is not scheduled and has DRX configured. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell1 and Cell2. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. Prior to start of T1 the DRX inactivity timer for the LTE PCell has already expired. During T1 the UE shall be continuously scheduled on NR PSCell while not scheduled on LTE PCell. CORESET indicating a new transmission on PSCell shall be sent continuously during the entire time duration to ensure UE would not enter DRX state on PSCell.

Table A.4.5.2.1.1-1: Interruption at transitions between active and non-active during DRX supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.2.1.1-2: General test parameters for E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other is NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
CP length		Normal	Applicable to Cell1 and Cell2
DRX		DRX.4	DRX related parameters are defined in Table A.3.3.4-1
Measurement gap pattern Id		OFF	
T1	s	10	

Table A.4.5.2.1.1-3: NR cell specific test parameters for E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
BW _{channel}	Config 1,4		10: N _{RB,c} = 52
	Config 2,5		10: N _{RB,c} = 52
	Config 3,6		40: N _{RB,c} = 106
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD

RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
OCNG Patterns			OP.1
SMTc Configuration			SMTc.1
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS (Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N _{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
Ē _s /I _{ot}		dB	17
Ē _s /N _{oc}		dB	17
I _o ^{Note 3}	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 ^{Note 4}		μs	33
Propagation Condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells			

Table A.4.5.2.1.1-4: Void

A.4.5.2.1.2 Test Requirements

The UE shall be continuously scheduled in NR PSCell during the entire length of T1. UE shall not be scheduled in LTE PCell during T1. During the time duration T1 the UE shall transmit at least 99% of ACK/NACK on NR PSCell.

Interruption on NR PSCell shall not exceed X as defined in Table A.4.5.2.1.2-1.

Table A.4.5.2.1.2-1: Interruption length X at transition between active and non-active during DRX

μ	NR Slot length (ms)	Interruption length X
		Sync

0	1	1
1	0.5	1

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.2 E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

A.4.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that when LTE PCell is in DRX and NR PSCell is in non-DRX, NR PSCell interruptions due to transitions from active to non-active and from non-active to active during LTE PCell DRX the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC specified in TS 38.133 clause 8.2.1.2. Supported test configurations are shown in table A.4.5.2.2.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.2.1-2 and A.4.5.2.2.1-3. The E-UTRAN PCell DRX configuration parameters are given in Table A.4.5.2.2.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are two cells: Cell1 and Cell2. Cell1 is LTE PCell and Cell2 is NR FR1 PSCell. The test consists of one time period, with duration of T1. During T1, NR PSCell is continuously scheduled in DL while LTE PCell is not scheduled and has DRX configured. Prior to the start of the time duration T1, Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. Prior to start of T1 the DRX inactivity timer for the LTE PCell has already expired. During T1 the UE shall be continuously scheduled on NR PSCell while not scheduled on LTE PCell. PDCCH indicating a new transmission on PSCell shall be sent continuously during the entire time duration to ensure UE would not enter DRX state on PSCell.

Table A.4.5.2.2.1-1: Interruption at transitions between active and non-active during DRX supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.2.2.1-2: General test parameters for E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other is NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
CP length		Normal	Applicable to Cell1 and Cell2
DRX		DRX.4	DRX related parameters are defined in Table A.3.3.4-1
Measurement gap pattern Id		OFF	
T1	s	10	

Table A.4.5.2.2.1-3: NR cell specific test parameters for E-UTRAN – NR FR1 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
BW _{channel}	Config 1,4		10: N _{RB,c} = 52
	Config 2,5		10: N _{RB,c} = 52
	Config 3,6		40: N _{RB,c} = 106
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N _{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I _o ^{Note3}	Config 1,2,4,5	dBm/9.36MHz	-58.96

	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 ^{Note 4}		μ s	500
Propagation Condition			AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4:	Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells		

Table A.4.5.2.2.1-4: Void

A.4.5.2.2.2 Test Requirements

The UE shall be continuously scheduled in NR PSCell during the entire length of T1. UE shall not be scheduled in LTE PCell during T1. During the time duration T1 the UE shall transmit at least 99% of ACK/NACK on NR PSCell.

Interruption on NR PSCell shall not exceed X as defined in Table A.4.5.2.2.2-1.

Table A.4.5.2.2.2-1: Interruption length X at transition between active and non-active during DRX

μ	NR Slot length (ms)	Interruption length X
		Async
0	1	2
1	0.5	2

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.3 E-UTRAN – NR FR1 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

A.4.5.2.3.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC specified in TS 38.133 clause 8.2.1.2. Supported test configurations for LTE PCell and NR PSCell are shown in table A.4.5.2.3.1-1. Supported test configurations for NR SCell are shown in table A.4.5.2.3.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.3.1-2, A.4.5.2.3.1-3 and A.4.5.2.3.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is LTE PCell, Cell2 and Cell3 is NR PSCell and NR deactivated SCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2 and the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector. During T1, LTE PCell and NR PSCell are continuously scheduled in DL

Table A.4.5.2.3.1-1: Interruptions during measurements on deactivated NR SCC supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration,

Table A.4.5.2.3.1-1A: Interruptions during measurements on deactivated NR SCC supported test configurations for NR SCell

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration

Table A.4.5.2.3.1-2: General test parameters for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Active PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on NR RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.4.5.2.3.1-3: NR cell specific test parameters for NR PSCell for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
BW_{channel}	Config 1,4		Note 8
	Config 2,5		Note 8

BW _{occupied}	Config 3,6	RB	Note 8
	Config 1,4		52 ^{Note 6}
	Config 2,5		52 ^{Note 6}
	Config 3,6		106 ^{Note 7}
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns	Config 1,2,4,5		OP.1 ^{Note 6}
	Config 3,6		OP.1 ^{Note 7}
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N _{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I _o ^{Note 3}	Config 1,2,4,5	dBm/ 9.36MHz	-58.96
	Config 3,6	dBm/ 38.16MHz	-52.86
Time offset to Cell1 ^{Note 4}		μs	3 for intra-band EN-DC, 33 for inter-band EN-DC
Time offset to Cell2 ^{Note 5}		μs	-
Propagation Condition			AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells
Note 5:	Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.
Note 7:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.
Note 8:	$N_{RB,C}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table A.4.5.2.3.1-4: NR cell specific test parameters for NR SCell for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter		Unit	Cell3
Frequency Range			FR1
Duplex mode	Config _{SCell} 1		FDD
	Config _{SCell} 2,3		TDD
TDD configuration	Config _{SCell} 1		Not Applicable
	Config _{SCell} 2		TDDConf.1.1
	Config _{SCell} 3		TDDConf.2.1
$BW_{channel}$	Config _{SCell} 1		Note 8
	Config _{SCell} 2		Note 8
	Config _{SCell} 3		Note 8
$BW_{occupied}$	Config _{SCell} 1	RB	52 ^{Note 6}
	Config _{SCell} 2		52 ^{Note 6}
	Config _{SCell} 3		106 ^{Note 7}
Initial DL BWP Configuration	Config _{SCell} 1		DLBWP.0.1
	Config _{SCell} 2		DLBWP.0.1
	Config _{SCell} 3		DLBWP.0.1
Dedicated DL BWP Configuration	Config _{SCell} 1		DLBWP.1.1
	Config _{SCell} 2		DLBWP.1.1
	Config _{SCell} 3		DLBWP.1.1
Initial UL BWP Configuration	Config _{SCell} 1		ULBWP.0.1
	Config _{SCell} 2		ULBWP.0.1
	Config _{SCell} 3		ULBWP.0.1
Dedicated UL BWP Configuration	Config _{SCell} 1		ULBWP.1.1
	Config _{SCell} 2		ULBWP.1.1
	Config _{SCell} 3		ULBWP.1.1
PDSCH Reference measurement channel	Config _{SCell} 1		-
	Config _{SCell} 2		-
	Config _{SCell} 3		-
RMSI CORESET parameters	Config _{SCell} 1		CR.1.1 FDD
	Config _{SCell} 2		CR.1.1 TDD
	Config _{SCell} 3		CR.2.1 TDD
PDCCH CORESET parameters	Config _{SCell} 1		CCR.1.1 FDD
	Config _{SCell} 2		CCR.1.1 TDD
	Config _{SCell} 3		CCR.2.1 TDD
TRS configuration	Config _{SCell} 1		TRS.1.1 FDD
	Config _{SCell} 2		TRS.1.1 TDD

		Config _{SCell} 3		TRS.1.2 TDD
OCNG Patterns	Config _{SCell} 1,2			OP.1 ^{Note 6}
	Config _{SCell} 3			OP.1 ^{Note 7}
SMTC Configuration				SMTC.1
TCI state				TCI.State.0
SSB Configuration	Config _{SCell} 1,2			SSB.1 FR1
	Config _{SCell} 3			SSB.2 FR1
Correlation Matrix and Antenna Configuration				1x2 Low
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
N _{oc} ^{Note 2}			dBm/15 kHz	-104
SS-RSRP ^{Note 3}			dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$			dB	17
$\hat{E}_s/N_{oc}$			dB	17
I _o ^{Note 3}	Config _{SCell} 1,2		dBm/9.36MHz	-58.96
	Config _{SCell} 3		dBm/38.16MHz	-52.86
Time offset to Cell1 ^{Note 4}			μs	3 + Time offset to Cell2 for intra-band EN-DC, 33 + Time offset to Cell2 for inter-band EN-DC
Time offset to Cell2 ^{Note 5}			μs	3
Propagation Condition				AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N _{oc} to be fulfilled within BW _{occupied} .				
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells				
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.				
Note 6: All UL/DL transmission shall be confined within BW _{occupied} (i.e. 10 MHz, 52 RBs) from F _{C,low} , and I _o is independent of the BW _{channel} configured.				
Note 7: All UL/DL transmission shall be confined within BW _{occupied} (i.e. 40 MHz, 106 RBs) from F _{C,low} , and I _o is independent of the BW _{channel} configured.				
Note 8: N _{RB,C} is derived from Table 5.3.2-1 in TS38.101-1[2] with configured BW _{channel} .				

A.4.5.2.3.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell.

If the NR PSCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PSCell immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.4.5.2.3.2-1.

If the NR PSCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PSCell no earlier than 1 slot before an SMTC and no later than 1 slot after the SMTC. the interruption on NR PSCell shall not exceed the value defined in Table A.4.5.2.3.2-2.

Table A.4.5.2.3.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	1
1	0.5	1

Table A.4.5.2.3.2-2: Interruption duration if the NR PSCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	2 + SMTC duration
1	0.5	2 + SMTC duration

For synchronous inter-band EN-DC, the UE is only allowed to cause interruptions on E-UTRA PCell immediately before and immediately after an SMTC. Each interruption on E-UTRA PCell shall not exceed 1 subframe.

For synchronous intra-band EN-DC, the UE is only allowed to cause an interruption on E-UTRA PCell no earlier than 1 subframe before an SMTC and no later than 1 subframe after the SMTC. The interruption on E-UTRA PCell shall not exceed SMTC duration + 2 subframes.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.4 E-UTRAN – NR FR1 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

A.4.5.2.4.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC specified in TS 38.133 clause 8.2.1. Supported test configurations for LTE PCell and NR PSCell are shown in table A.4.5.2.4.1-1. Supported test configurations for NR SCell are shown in table A.4.5.2.4.1-1. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.4.1-2, A.4.5.2.4.1-3 and A.4.5.2.4.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is LTE PCell, Cell2 and Cell3 is NR PSCell and NR deactivated SCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2 and the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.4.5.2.4.1-1: Interruptions during measurements on deactivated NR SCC supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode

3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth (BW_{channel}) defined in each test configuration,	

Table A.4.5.2.4.1-1A: Interruptions during measurements on deactivated NR SCC supported test configurations for NR SCell

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth (BW_{channel}) defined in each test configuration	

Table A.4.5.2.4.1-2: General test parameters for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on NR RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.4.5.2.4.1-3: NR cell specific test parameters for NR PSCell for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
BW_{channel}	Config 1,4		Note 8
	Config 2,5		Note 8
	Config 3,6		Note 8
BW_{occupied}	Config 1,4	RB	52 ^{Note 6}
	Config 2,5		52 ^{Note 6}
	Config 3,6		106 ^{Note 7}
Initial BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1

	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns	Config 1,2,4,5		OP.1 ^{Note 6}
	Config 3,6		OP.1 ^{Note 7}
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N_{oc} ^{Note 2}		dBm/15 Hz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I_0 ^{Note 3}	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 ^{Note 4}	Config 1,2,4,5	μ s	500
	Config 3,6		250
Time offset to Cell2 ^{Note 5}		μ s	-
Propagation Condition			AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells
Note 5:	Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
Note 6:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.
Note 7:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.
Note 8:	$N_{RB,C}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table A.4.5.2.4.1-4: NR cell specific test parameters for NR SCell for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter		Unit	Cell3
Frequency Range			FR1
Duplex mode	Config _{SCell} 1		FDD
	Config _{SCell} 2,3		TDD
TDD configuration	Config _{SCell} 1		Not Applicable
	Config _{SCell} 2		TDDConf.1.1
	Config _{SCell} 3		TDDConf.2.1
$BW_{channel}$	Config _{SCell} 1		Note 8
	Config _{SCell} 2		Note 8
	Config _{SCell} 3		Note 8
$BW_{occupied}$	Config _{SCell} 1	RB	52 ^{Note 6}
	Config _{SCell} 2		52 ^{Note 6}
	Config _{SCell} 3		106 ^{Note 7}
Initial BWP Configuration	Config _{SCell} 1		DLBWP.0.1
	Config _{SCell} 2		DLBWP.0.1
	Config _{SCell} 3		DLBWP.0.1
Dedicated DL BWP Configuration	Config _{SCell} 1		DLBWP.1.1
	Config _{SCell} 2		DLBWP.1.1
	Config _{SCell} 3		DLBWP.1.1
Initial UL BWP Configuration	Config _{SCell} 1		ULBWP.0.1
	Config _{SCell} 2		ULBWP.0.1
	Config _{SCell} 3		ULBWP.0.1
Dedicated UL BWP Configuration	Config _{SCell} 1		ULBWP.1.1
	Config _{SCell} 2		ULBWP.1.1
	Config _{SCell} 3		ULBWP.1.1
PDSCH Reference measurement channel	Config _{SCell} 1		-
	Config _{SCell} 2		-
	Config _{SCell} 3		-
RMSI CORESET parameters	Config _{SCell} 1		CR.1.1 FDD
	Config _{SCell} 2		CR.1.1 TDD
	Config _{SCell} 3		CR.2.1 TDD
PDCCH CORESET parameters	Config _{SCell} 1		CCR.1.1 FDD
	Config _{SCell} 2		CCR.1.1 TDD
	Config _{SCell} 3		CCR.2.1 TDD
TRS configuration	Config _{SCell} 1		TRS.1.1 FDD
	Config _{SCell} 2		TRS.1.1 TDD

	Config _{SCell} 3		TRS.1.2 TDD
OCNG Patterns	Config _{SCell} 1,2		OP.1 ^{Note 6}
	Config _{SCell} 3		OP.1 ^{Note 7}
SSB Configuration	Config _{SCell} 1,2		SSB.1 FR1
	Config _{SCell} 3		SSB.2 FR1
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N _{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\bar{E}_s/I_{ot}$		dB	17
$\bar{E}_s/N_{oc}$		dB	17
I _o ^{Note 3}	Config _{SCell} 1,2	dBm/ 9.36MHz	-58.96
	Config _{SCell} 3	dBm/ 38.16MHz	-52.86
Time offset to Cell1 ^{Note 4}	Config _{SCell} 1,2	μs	500 + Time offset to Cell2
	Config _{SCell} 3		250 + Time offset to Cell2
Time offset to Cell2 ^{Note 5}		μs	3
Propagation Condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled within BW_{occupied}. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells. Note 6: All UL/DL transmission shall be confined within BW_{occupied} (i.e. 10 MHz, 52 RBs) from F_{C,low}, and I_o is independent of the BW_{channel} configured. Note 7: All UL/DL transmission shall be confined within BW_{occupied} (i.e. 40 MHz, 106 RBs) from F_{C,low}, and I_o is independent of the BW_{channel} configured. Note 8: N_{RB,C} is derived from Table 5.3.2-1 in TS38.101-1[2] with configured BW_{channel}.			

A.4.5.2.4.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell.

If the NR PSCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PSCell immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.4.5.2.4.2-1.

If the NR PSCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PSCell no earlier than 1 slot before an SMTC and no later than 1 slot after the SMTC. the interruption on NR PSCell shall not exceed the value defined in Table A.4.5.2.4.2-2.

Table A.4.5.2.4.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	1
1	0.5	1

Table A.4.5.2.4.2-2: Interruption duration if the NR PSCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	2 + SMTC duration
1	0.5	2 + SMTC duration

For asynchronous inter-band EN-DC, the UE is only allowed to cause interruptions on E-UTRA PCell immediately before and immediately after an SMTC. Each interruption on E-UTRA PCell shall not exceed 2 subframe.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.5 E-UTRAN – NR FR1 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

A.4.5.2.5.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated E-UTRAN SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC specified in TS38.133 clause 8. 2.1.2. Supported test configurations are shown in table A.4.5.2.5.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.5.1-2 and A.4.5.2.5.1-3 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 and Cell3 is E-UTRAN PCell and E-UTRAN deactivated SCell, Cell2 is NR FR1 PSCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2 and the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated E-UTRAN SCells is received at the UE antenna connector. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.4.5.2.5.1-1: Interruptions during measurements on deactivated E-UTRAN SCC supported test configurations

Config	Description
	LTE PCell + NR PSCell ^{Note 2}
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: The duplex mode of the LTE SCell is determined based on the band combination to be tested.	

Table A.4.5.2.5.1-2: General test parameters for E-UTRAN – NR interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is NR RF channel and the other two are E-UTRAN RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Active PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on E-UTRAN RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.4.5.2.5.1-3: NR cell specific test parameters for E-UTRAN – NR interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52
	Config 2,5		10: N _{RB,c} = 52
	Config 3,6		40: N _{RB,c} = 106
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2,4,5		SSB.1 FR1

Config 3,6			SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N _{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I _o ^{Note3}	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 ^{Note 4}		μs	33
Propagation Condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells			

A.4.5.2.5.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTc. Each interruption on NR PSCell shall not exceed X defined in Table A.4.5.2.5.2-1 if the NR PSCell is not in the same band as the E-UTRAN deactivated SCell or Y in Table A.4.5.2.3.2-1 if the NR PSCell is in the same band as the E-UTRAN deactivated SCell.

Table A.4.5.2.5.2-1: Interruption length X and Y at measurements on deactivated E-UTRA SCC

μ	NR Slot length (ms)	Interruption length X slot	Interruption length Y slot
		Sync	
0	1	1	1
1	0.5	1	1

Each interruption on E-UTRAN PCell shall not exceed 1 subframe if the PCell is not in the same band as the deactivated SCell, or 5 subframes if the PCell is in the same band as the deactivated SCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.6 E-UTRAN – NR FR1 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

A.4.5.2.6.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell and NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed

ACK/NACK rate for E-UTRAN PCell and NR PSCell in EN-DC specified in TS 38.133 clause 8.2.1. Supported test configurations are shown in table A.4.5.2.6.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.6.1-1 and A.4.5.2.6.1-2 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 and Cell3 is E-UTRAN PCell and E-UTRAN deactivated SCell, Cell2 is NR FR1 PSCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2 and the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

T antenna connector. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.4.5.2.6.1-1: Interruptions during measurements on deactivated E-UTRAN SCC supported test configurations

Config	Description
	LTE PCell + NR PSCell ^{Note 2}
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: The duplex mode of the LTE SCell is determined based on the band combination to be tested.	

Table A.4.5.2.6.1-2: General test parameters for E-UTRAN – NR interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is NR RF channel and the other two are E-UTRAN RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on E-UTRAN RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.4.5.2.6.1-3: NR cell specific test parameters for E-UTRAN – NR interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
BW _{channel}	Config 1,4		10: N _{RB,c} = 52
	Config 2,5		10: N _{RB,c} = 52
	Config 3,6		40: N _{RB,c} = 106
Initial DL BWP	Config 1,4		DLBWP.0.1

Configuration	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OP.1
SMTc Configuration			SMTc.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N _{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I _o ^{Note3}	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 ^{Note 4}		μs	500
Propagation Condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells			

A.4.5.2.6.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on E-UTRAN PCell and NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.4.5.2.4.2-1 and Table A.4.5.2.4.2-2.

Table A.4.5.2.6.2-1: Interruption duration if the NR PSCell is not in the same band as the E-UTRAN deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	2
1	0.5	2

Table A.4.5.2.6.2-2: Interruption duration if the NR PSCell is in the same band as the E-UTRAN deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	2 + SMTC duration
1	0.5	2 + SMTC duration

Each interruption on E-UTRAN PCell shall not exceed 1 subframe if the PCell is not in the same band as the deactivated SCell, or 5 subframes if the PCell is in the same band as the deactivated SCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.7 Void

A.4.5.2.8 E-UTRAN - NR FR1 interruptions at NR SRS carrier based switching in asynchronous EN-DC

A.4.5.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that when a UE needs to transmit aperiodic SRS, the UE can perform carrier based switching to one carrier not configured for PUCCH/PUSCH transmission from a CC with PUCCH/PUSCH transmission. The test will verify the UE missed ACK/NACK does not exceed the interruption requirements on E-UTRAN PCell and NR PSCell in clause 8.2.1.2.12. Supported test configurations are shown in table A.4.5.2.8.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.8.1-2 and A.4.5.2.8.1-3 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is E-UTRAN PCell, Cell2 is NR PSCell in FR1 with PUCCH/PUSCH transmission, Cell3 is an activated NR SCell in FR1 which operates in downlink without PUCCH/PUSCH transmission. The UE is configured with the SRS carrier based switching between PSCell and SCell.

The test consists of two successive time periods, with duration of T1 and T2, respectively. Throughout the test the UE shall be continuously scheduled on PCell and PSCell. Immediately at the beginning of T2, a PDCCH with TPC-SRS-RNTI is sent to the UE to initiate NR SRS switching.

Table A.4.5.2.8.1-1: Interruptions at SRS carrier switching supported test configurations in FR1

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, PSCell FDD duplex mode, SCell TDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, PSCell TDD duplex mode, SCell TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, PSCell FDD duplex mode, SCell TDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, PSCell TDD duplex mode, SCell TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.2.8.1-2: General test parameters for E-UTRAN – NR FR1 interruptions at SRS carrier based switching in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	Configured PSCell on NR RF channel number 2.
Configured SCell		Cell3	Configured activated secondary cell on NR RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3.
DRX		OFF	Continuous monitoring of primary cell
Filter coefficient		0	L3 filtering is not used
T1	s	5	
T2	ms	40	UE shall perform SRS switching during T2

Table A.4.5.2.8.1-3: NR Cell specific test parameters for E-UTRAN – NR FR1 interruptions at SRS carrier based switching in asynchronous EN-DC

Parameter		Unit	Cell2	Cell3
Frequency Range			FR1	FR1
Duplex mode	Config 1,4		FDD	TDD
	Config 2,3,5,6		TDD	TDD
TDD configuration	Config 1,4		Not Applicable	TDDConfig.1.1
	Config 2,5		TDDConf.1.1	TDDConfig.1.1
	Config 3,6		TDDConf.2.1	TDDConfig.2.1
BW _{channel}	Config 1,2,4,5	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52
	Config 3,6		40: N _{RB,c} = 106	40: N _{RB,c} = 106
DL Initial BWP configuration	Config 1-6		DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1-6		DLBWP.1.1	DLBWP.1.1
UL Initial BWP configuration	Config 1-6		ULBWP.0.1	-
UL dedicated BWP configuration	Config 1-6		ULBWP.1.1	-
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.1.1 TDD
	Config 2,5		SR.1.1 TDD	SR.1.1 TDD
	Config 3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.1.1 TDD
	Config 2,5		CR.1.1 TDD	CR.1.1 TDD
	Config 3,6		CR.2.1 TDD	CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.1.1 TDD
	Config 2,5		CCR.1.1 TDD	CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1

TRS configuration	Config 1,4		TRS.1.1 FDD	TRS.1.1 TDD
	Config 2,5		TRS.1.1 TDD	TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD	TRS.1.2 TDD
SMTc configuration			SMTc.1	SMTc.1
SSB configuration	Config 1,2,4,5		SSB.1 FR1	SSB.1 FR1
	Config 3,6		SSB.2 FR1	SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	15 kHz
	Config 3,6		30 kHz	30 kHz
SRS Configuration	Config 1,2,4,5	kHz	-	SRS.4 TDD
	Config 3,6		-	SRS.5 TDD
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	-
	Config 3,6		30 kHz	-
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc}^{Note2}		dBm/15kHz	-104	-104
N_{oc}^{Note2}	Config 1,2,4,5	dBm/SCS	-104	-104
	Config 3,6		-101	-101
SS-RSRP ^{Note3}	Config 1,2,4,5	dBm/SCS	-87	-87
	Config 3,6		-84	-84
$\hat{E}_s/I_{\alpha}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
I_0 ^{Note3}	Config 1,2,4,5	dBm/9.36MHz	-58.96	-58.96
	Config 3,6	dBm/38.16MHz	-52.86	-52.86
Time offset to Cell1 ^{Note 5}		μs	-	3
Propagation condition		-	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.				

Table A.4.5.2.8.1-4: Void**A.4.5.2.8.2 Test Requirements**

During the time duration T2, the missed ACK/NACK interruption on NR PSCell during the switching from NR PSCell to NR SCell shall not exceed the value as defined in Table A.4.5.2.8.2-1 dependent on the applied SRS carrier switching time.

Table A4.5.2.8.2-1: Interruption length on NR active serving cells at NR SRS carrier switching (slot)

μ	NR Slot length (ms) of victim cell	SRS carrier switching time (us) ^{Note 1}	Interruption length X1 (slots)	
			Sub carrier spacing for aggressor cell (kHz)	
			15	30
0	1	≤ 200	2	2
		300, 500	2	2
		900	3	3
1	0.5	≤ 200	3	2
		300, 500	3	3
		900	4	4
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter <i>SRS-SwitchingTimeNR</i> .				

During the time duration T2, the missed ACK/NACK interruption on E-UTRAN PCell during the switching from NR PSCell to NR SCell shall not exceed the value as defined in Table A.4.5.2.8.2-2 dependent on the applied SRS carrier switching time.

Table 4.5.2.8.2-2: Interruption length on E-UTRAN active serving cells at NR SRS carrier switching

NR SRS carrier switching time (us) ^{note1}	Interruption length X1 (subframes)
≤500	2
900	3
Note1: NR SRS carrier switching time is UE capability indicated by higher layer parameter <i>SRS-SwitchingTimeNR</i> .	

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.9 E-UTRAN – NR interruptions at E-UTRA SRS carrier based switching**A.4.5.2.9.1 Test Purpose and Environment**

The purpose of this test is to verify that when a UE needs to transmit aperiodic SRS on a PUSCH-less carrier of SCell, the UE can perform carrier based switching to one PUSCH-less SCCs from a CC with PUSCH. The test will verify the UE missed ACK/NACK does not exceed the interruption requirements on active serving cell in SCG in clause 8.2.1.2.13. Supported test configurations are shown in table A.4.5.2.9.1-1.

In the test there are three cells: cell1, cell2 and cell3. Cell1 is E-UTRAN PCell on the primary component carrier. Cell3 is E-UTRAN SCell on the TDD secondary component carrier which operates in downlink without PUCCH/PUSCH. Cell2 is NR FR1 PSCell. The UE is configured with the SRS switching between E-UTRAN PCell and E-UTRAN SCell. The general test parameters, NR cell specific test parameters and E-UTRA SRS configurations are given in Table A.4.5.2.9.1-2, A.4.5.2.9.1-3 and Table A.4.5.2.9.1-4 below. And the E-UTRAN cell specific test parameters (for cell1 and cell3) can refer to Table A.3.7.2.1-1. The test consists of two successive

time periods, with duration of T1 and T2, respectively. During T1 LTE PCell and NR PSCell are continuously scheduled in DL. Immediately at the beginning of T2, the UE is triggered for SRS switching by DCI 2_3 scheduling. After T2, the UE is expected to transmit aperiodic SRS on a special slot in the configured TDD UL/DL configuration, as scheduled by DCI 2_3.

Table A.4.5.2.9.1-1: E-UTRAN – NR interruptions at E-UTRA SRS carrier based switching supported test configurations

Config	Description
1	LTE FDD(cell1), LTE TDD (cell3), NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD(cell1), LTE TDD (cell3), NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD(cell1), LTE TDD (cell3), NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD(cell1), LTE TDD (cell3), NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD(cell1), LTE TDD (cell3), NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD(cell1), LTE TDD (cell3), NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.2.9.1-2: General test parameters for E-UTRAN – NR interruptions at E-UTRA SRS carrier based switching

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is NR RF channel and the other two are E-UTRAN RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Active PSCell		Cell2	PSCell on NR RF channel number 2.
Activated SCell		Cell3	SCell on E-UTRAN RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
T1	s	0.2	
T2	s	0.2	UE shall perform SRS switching during T2

Table A.4.5.2.9.1-3: NR cell specific test parameters for E-UTRAN – NR interruptions at E-UTRA SRS carrier based switching

Parameter	Unit	Cell2
Frequency Range		FR1
Duplex mode	Config 1,4	FDD
	Config 2,3,5,6	TDD
TDD configuration	Config 1,4	Not Applicable
	Config 2,5	TDDConf.1.1
	Config 3,6	TDDConf.2.1
BW _{channel}	Config 1,4	10: N _{RB,c} = 52
	Config 2,5	10: N _{RB,c} = 52
	Config 3,6	40: N _{RB,c} = 106
Initial DL BWP Configuration	Config 1,4	DLBWP.0.1
	Config 2,5	DLBWP.0.1
	Config 3,6	DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4	DLBWP.1.1
	Config 2,5	DLBWP.1.1
	Config 3,6	DLBWP.1.1
Initial UL BWP	Config 1,4	ULBWP.0.1

Configuration	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OP.1
SMTC Configuration			SMTC.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I_o ^{Note 3}	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 ^{Note 4}		μ s	33
Propagation Condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells			

Table A.4.5.2.9.1-4: Sounding Reference Symbol Configuration for E-UTRAN – NR interruptions at E-UTRA SRS carrier based switching

Field	Value	Comment
-------	-------	---------

srsBandwidthConfiguration	bw5	
srsSubframeConfiguration	Sc8	Once every 5 subframes
ackNackSrsSimultaneousTransmission	FALSE	
srsMaxUpPTS	N/A	Not applicable
srsBandwidth	0	No hopping
srsHoppingBandwidth	hbw0	
frequencyDomainPosition	0	
Duration	TRUE	Indefinite duration
Srs-ConfigIndexAp	47	SRS periodicity of 0ms. See Table 8.2-5 in TS 36.213 for aperiodic SRS transmission..
transmissionComb	0	
cyclicShift	cs0	No cyclic shift
SRS-AntennaPort	an1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 36.331.		

A.4.5.2.9.2 Test Requirements

The UE shall be continuously scheduled in NR PSCell throughout the test and during the time duration T2, Each missed ACK/NACK interruption on NR PSCell shall not exceed X defined in Table A.4.5.2.9.2-1.

Table A.4.5.2.9.2-1: Interruption length X (slot) E-UTRAN – NR at E-UTRA SRS carrier based switching

μ	NR Slot length (ms)	Interruption length X3 (slots)
0	1	2
1	0.5	3

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.10 E-UTRAN – NR FR1 interruptions due to RRM and RLM/BFD measurements on deactivated NR PSCell

A.4.5.2.10.1 Test Purpose and Environment

The purpose of this test is to verify E-UTRAN PCell interruptions due to RRM measurements and RLM/BFD measurements on the deactivated NR PSCell, and the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for E-UTRAN PCell in EN-DC according to the requirements specified in TS 36.133 clause 7.32.2.20 for RRM measurements, RLM and BFD measurements. Supported test configurations are shown in table A.4.5.2.10.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.10.1-1 and A.4.5.2.10.1-2 below. And the E-UTRAN cell specific test parameters can be referred to in Table A.3.7.2.1-1. In the test there are two cells: Cell1 and Cell2. Cell1 is E-UTRAN PCell, and Cell2 is deactivated NR FR1 PSCell. The test consists of one single period, T1.

Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. At the start of T1, the RRC message including *measCyclePSCell* or *allowInterruptions* is received at the UE antenna connector and Cell2 is deactivated. During T1, Cell1 continuously schedules data in DL and the UE is configured with RRM and bfd-and-RLM measurements on the deactivated Cell2. It is assumed that Cell1 and Cell2 are synchronized with a timing difference not larger than 3ms between the two cells.

Table A.4.5.2.10.1-1: Interruptions due to RRM and RLM/BFD measurements on deactivated NR PSCell supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.2.10.1-2: General test parameters for E-UTRAN – NR interruptions due to measurements on deactivated PSCell in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is NR RF channel and the other is E-UTRAN RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
CP length		Normal	Applicable to Cell1, Cell2
DRX		OFF	
Measurement gap pattern Id		OFF	
PSCell measurement cycle (measCyclePSCell)	ms	640	
T1	s	10	

Table A.4.5.2.10.1-3: NR cell specific test parameters for E-UTRAN – NR interruptions due to measurements on deactivated PSCell in synchronous EN-DC

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
BW _{channel}	Config 1,4		10: N _{RB,c} = 52
	Config 2,5		10: N _{RB,c} = 52
	Config 3,6		40: N _{RB,c} = 106
Initial DL BWP Configuration	Config 1,4		DLBWP.0.1
	Config 2,5		DLBWP.0.1
	Config 3,6		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		DLBWP.1.1
	Config 3,6		DLBWP.1.1
Initial UL BWP Configuration	Config 1,4		ULBWP.0.1
	Config 2,5		ULBWP.0.1
	Config 3,6		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,4		ULBWP.1.1
	Config 2,5		ULBWP.1.1
	Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD

RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
PDCCH CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns			OP.1
SMTc Configuration			SMTc.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N _{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I _o ^{Note3}	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Time offset to Cell1 ^{Note 4}		μs	500
Propagation Condition			AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N _{oc} to be fulfilled.		
Note 3:	SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4:	Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells		

A.4.5.2.10.2 Test Requirements

The UE shall be continuously scheduled in Cell1 during the entire length of T1 and the UE is configured with RRM and RLM/BFD measurements on the deactivated Cell2. During the time duration T1 the UE shall transmit at least 98.5% of ACK/NACK on E-UTRAN PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.11 E-UTRAN - NR FR1 interruptions at NR SRS antenna port switching with 1 SRS symbol in a slot in synchronous EN-DC

A.4.5.2.11.1 Test Purpose and Environment

The purpose of this test is to verify that the UE can perform SRS antenna port switching when the UE is configured with the higher layer parameter *usage* in *SRS-ResourceSet* set as 'antennaSwitching'. The test will verify the interruption requirements on E-UTRAN PCell and NR PSCell at SRS antenna switching in synchronous EN-DC as specified in Table 8.2.1.2.18-1 of clause 8.2.1.2.18. Supported test configurations for LTE PCell and NR PSCell are shown in table A.4.5.2.11.1-1. Supported test configurations for NR SCell are shown in table A.4.5.2.11.1-A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.11.1-2 and A.4.5.2.11.1-3 below. The dedicated SRS configuration for antenna port switching with 1 SRS symbol in a slot is given in Table A.4.5.2.11.1-3. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is E-UTRAN PCell, Cell2 is NR PSCell in FR1 and Cell3 is an activated NR SCell in FR1. The UE is configured with SRS antenna port switching on NR PSCell.

The test consists of two successive time periods, with duration of T1 and T2, respectively. Throughout the test the UE shall be continuously scheduled on PCell and SCell. Immediately at the beginning of T2, a PDCCH with TPC-SRS-RNTI is sent to the UE to initiate NR SRS switching.

Table A.4.5.2.11.1-1: Interruptions at SRS antenna port switching supported test configurations in FR1 for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR PSCell 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode, NR SCell 15 kHz SSB SCS, =10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR PSCell 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode, NR SCell 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR PSCell 30 kHz SSB SCS, =40 MHz bandwidth, TDD duplex mode, NR SCell 30 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR PSCell 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode, NR SCell 15 kHz SSB SCS, =10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR PSCell 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode, NR SCell 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR PSCell 30 kHz SSB SCS, =40 MHz bandwidth, TDD duplex mode, NR SCell 30 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.2.11.1-1A: Void

Table A.4.5.2.11.1-2: General test parameters for E-UTRAN – NR FR1 interruptions at SRS antenna port switching in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	Configured PSCell on NR RF channel number 2.
Configured SCell		Cell3	Configured activated secondary cell on NR RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3.
DRX		OFF	Continuous monitoring of primary cell
Filter coefficient		0	L3 filtering is not used

T1	s	0.2	
T2	ms	40	UE shall perform SRS switching during T2

Table A.4.5.2.11.1-3: NR Cell specific test parameters for E-UTRAN – NR FR1 interruptions at SRS antenna port switching in synchronous EN-DC

Parameter		Unit	Cell2	Cell3
Frequency Range			FR1	FR1
Duplex mode	Config 1,4		FDD	TDD
	Config 2,3,5,6		TDD	TDD
TDD configuration	Config 1,4		Not Applicable	TDDConfig.1.2 ^{Note6}
	Config 2,5		TDDConf.1.2	TDDConfig.1.2 ^{Note6}
	Config 3,6		TDDConf.2.3	TDDConfig.2.3 ^{Note6}
BW _{channel}	Config 1,2,4,5	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52
	Config 3,6		40: N _{RB,c} = 106	40: N _{RB,c} = 106
DL Initial BWP configuration	Config 1-6		DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1-6		DLBWP.1.1	DLBWP.1.1
UL Initial BWP configuration	Config 1-6		ULBWP.0.1	-
UL dedicated BWP configuration	Config 1-6		ULBWP.1.1	-
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.1.1 TDD
	Config 2,5		SR.1.1 TDD	SR.1.1 TDD
	Config 3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.1.1 TDD
	Config 2,5		CR.1.1 TDD	CR.1.1 TDD
	Config 3,6		CR.2.1 TDD	CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.1.1 TDD
	Config 2,5		CCR.1.1 TDD	CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1
TRS configuration	Config 1,4		TRS.1.1 FDD	TRS.1.1 TDD
	Config 2,5		TRS.1.1 TDD	TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD	TRS.1.2 TDD
SMTc configuration			SMTc.1	SMTc.1
SSB configuration	Config 1,2,4,5		SSB.1 FR1	SSB.1 FR1
	Config 3,6		SSB.2 FR1	SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	15 kHz
	Config 3,6		30 kHz	30 kHz
SRS Configuration	Config 1,2,4,5	kHz	SRS.13	-
	Config 3,6		SRS.x2	-
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	-
	Config 3,6		30 kHz	-
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				

EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note2}		dBm/15kHz	-104	-104
N_{oc} ^{Note2}	Config 1,2,4,5	dBm/SCS	-104	-104
	Config 3,6		-101	-101
SS-RSRP ^{Note3}	Config 1,2,4,5	dBm/SCS	-87	-87
	Config 3,6		-84	-84
$\hat{E}_s / I_{ot}$		dB	17	17
$\hat{E}_s / N_{oc}$		dB	17	17
I_0 ^{Note3}	Config 1,2,4,5	dBm/9.36MHz	-58.96	-58.96
	Config 3,6	dBm/38.16MHz	-52.86	-52.86
Time offset to Cell1 ^{Note 4}		μ s	33	33 + Time offset to Cell2
Time offset to Cell2 ^{Note 5}		μ s	-	3
Propagation condition		-	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells. Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells. Note 6: The test configuration for NR SCell is selected from Table A.4.5.2.11.1-1A.				

Table A.4.5.2.11.1-4: SRS.X1 Dedicated SRS Configuration for antenna port switching with 1 SRS symbol in a slot in synchronous EN-DC

15kHz, scenario 1	1T2R		2T4R		1T4R			
srs-ResourceId	0	1	0	1	0	1	2	3
startPosition	3	3	3	3	3	3	3	3
nrofSymbols	1	1	1	1	1	1	1	1
nrofSRS-Ports	port1	port1	port2	port2	port1	port1	port1	port1
periodicityAndOffset-p	sl40, 1	sl40, 6	sl40, 1	sl40, 6	sl40, 1	sl40, 6	sl40, 11	sl40, 16
Note 1: 'xTxR' depends on indicated UE capability for SRS antenna port switching Note 2: SRS configurations follow (the dedicated configuration table) if the entries are included in Table A.4.5.2.11.1-4, otherwise following corresponding common configuration in A.3.24 as specified in Table A.4.5.2.11.1-3.								

30kHz, scenario 1	1T2R		2T4R		1T4R			
srs-ResourceId	0	1	0	1	0	1	2	3
startPosition	3	3	3	3	3	3	3	3
nrofSymbols	1	1	1	1	1	1	1	1

nrofSRS-Ports	port1	port1	port2	port2	port1	port1	port1	port1
periodicityAndOffset	sl80,	sl80,	sl80,	sl80,	sl80,	sl80,	sl80,	sl80,
-p	3	13	3	13	3	13	23	33
Note 1: 'xTxR' depends on indicated UE capability for SRS antenna port switching Note 2: SRS configurations follow (the dedicated configuration table) if the entries are included in Table A. 4.5.2.11.1-4, otherwise following corresponding common configuration in A.3.24 as specified in Table A.4.5.2.11.1-3.								

A.4.5.2.11.2 Test Requirements

In the test, the interruption is verified by monitoring ACK/NACK sent in E-UTRAN PCell and NR SCell during the SRS antenna switching on NR PSCell.

During the time duration T2, the DL interruption on NR SCell during the SRS antenna switching in each SRS transmission slot on NR PSCell shall not exceed 1 slot if SCell is indicated in *txSwitchImpactToRx*, and the UL interruption on NR SCell during the SRS antenna switching in each SRS transmission slot on NR PSCell shall not exceed 1 slot if SCell is indicated in *txSwitchWithAnotherBand*. Otherwise, the NR SCell shall not be interrupted.

During the time duration T2, the DL interruption on E-UTRAN PCell during the SRS antenna switching in each SRS transmission slot on NR PSCell shall not exceed 1 subframe if PCell is indicated in *txSwitchImpactToRx*, and the UL interruption on E-UTRAN PCell during the SRS antenna switching in each SRS transmission slot on NR PSCell shall not exceed 1 subframe if SCell is indicated in *txSwitchWithAnotherBand*. Otherwise, the EUTRAN PCell shall not be interrupted.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.2.12 E-UTRAN - NR FR1 interruptions at NR SRS antenna port switching in asynchronous EN-DC

A.4.5.2.12.1 Test Purpose and Environment

The purpose of this test is to verify the interruption during NR SRS antenna port switching on E-UTRAN PCell and NR SCell in TS 36.133 clause 7.32.2.18 and clause 8.2.1.2.18. Supported test configurations for LTE PCell and NR PSCell are shown in table A.4.5.2.12.1-1. Supported test configurations for NR SCell are shown in table A.4.5.2.12.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

The general test parameters and NR cell specific test parameters are given in Table A.4.5.2.12.1-2, A.4.5.2.12.1-3 and A.4.5.2.12.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is E-UTRAN PCell, Cell2 is NR PSCell in FR1, Cell3 NR SCell in FR1. The UE is configured with the SRS antenna port switching on Cell2.

The test consists of two time period, with duration of T1 and T2. Prior to the start of the time duration T1, the UE is connected to Cell1, Cell2 and Cell3. LTE PCell and NR PSCell are continuously scheduled in DL during T1 and T2. UE receives RRC message to trigger periodic SRS for antenna switching and it ready for SRS antenna switching before T2.

Table A.4.5.2.12.1-1: Interruptions at SRS antenna port switching supported test configurations in FR1 for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode, NR SCell 15 kHz SSB SCS, =10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode, NR SCell 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode

3	LTE FDD, NR 30 kHz SSB SCS, =40 MHz bandwidth, TDD duplex mode, NR SCell 30 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode, NR SCell 15 kHz SSB SCS, =10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode, NR SCell 15 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, =40 MHz bandwidth, TDD duplex mode, NR SCell 30 kHz SSB SCS, =10 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.2.12.1-1A: Void

Table A.4.5.2.12.1-2: General test parameters for E-UTRAN – NR FR1 interruptions at SRS antenna port switching in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	Configured PSCell on NR RF channel number 2.
Configured SCell		Cell3	Configured activated secondary cell on NR RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3.
DRX		OFF	Continuous monitoring of primary cell
Filter coefficient		0	L3 filtering is not used
T1	s	0.2	
T2	ms	40	

Table A.4.5.2.12.1-3: NR Cell specific test parameters for E-UTRAN – NR FR1 interruptions at SRS antenna port switching in asynchronous EN-DC for NR PSCell

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.2
	Config 3,6		TDDConf.2.3
BW _{channel}	Config 1,2,4,5	MHz	10: N _{RB,c} = 52
	Config 3,6		40: N _{RB,c} = 106
DL Initial BWP configuration	Config 1-6		DLBWP.0.1
DL dedicated BWP configuration	Config 1-6		DLBWP.1.1
UL Initial BWP configuration	Config 1-6		ULBWP.0.1
UL dedicated BWP configuration	Config 1-6		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
	Config 1,4		CCR.1.1 FDD

RMC CORESET	Config 2,5		CCR.1.1 TDD
Reference Channel	Config 3,6		CCR.2.1 TDD
OCNG Patterns			OP.1
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
SMTc configuration			SMTc.1
SSB configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz
	Config 3,6		30 kHz
SRS Configuration	Config 1,2,4,5		SRSCnf.1
	Config 3,6		SRSCnf.2
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz
	Config 3,6		30 kHz
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS (Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} ^{Note2}		dBm/15kHz	-104
N_{oc} ^{Note2}	Config 1,2,4,5	dBm/SCS	-104
	Config 3,6		-101
SS-RSRP ^{Note3}	Config 1,2,4,5	dBm/SCS	-87
	Config 3,6		-84
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
I_o ^{Note3}	Config 1,2,4,5	dBm/ 9.36MHz	-58.96
	Config 3,6	dBm/ 38.16MHz	-52.86
Time offset to Cell1 ^{Note 4}		μ s	500
Time offset to Cell2 ^{Note 5}		μ s	-
Propagation condition		-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells. Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.			

Table A.4.5.2.12.1-4: NR Cell specific test parameters for E-UTRAN – NR FR1 interruptions at SRS antenna port switching in asynchronous EN-DC for NR SCell

Parameter	Unit	Cell3
-----------	------	-------

Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConfig.1.2
	Config 3		TDDConfig.2.3
BW _{channel}	Config 1		10: N _{RB,c} = 52
	Config 2		10: N _{RB,c} = 52
	Config 3		40: N _{RB,c} = 106
Initial DL BWP Configuration	Config 1		DLBWP.0.1
	Config 2		DLBWP.0.1
	Config 3		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1		DLBWP.1.1
	Config 2		DLBWP.1.1
	Config 3		DLBWP.1.1
Initial UL BWP Configuration	Config 1		ULBWP.0.1
	Config 2		ULBWP.0.1
	Config 3		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1		ULBWP.1.1
	Config 2		ULBWP.1.1
	Config 3		ULBWP.1.1
PDSCH Reference measurement channel	Config 1		-
	Config 2		-
	Config 3		-
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
PDCCH CORESET parameters	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
OCNG Patterns	Config 1,2		OP.1
	Config 3		OP.1
SMT-C Configuration			SMT-C.1
TCI state			TCI.State.0
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N _{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I_o ^{Note3}	Config 1,2	dBm/9.36MHz	-58.96

	Config 3	dBm/ 38.16MH z	-52.86
Time offset to Cell1	Note 4	μ s	500 + Time offset to Cell2
Time offset to Cell2	Note 5	μ s	3
Propagation Condition			AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.		
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4:	Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell at the UE antenna connector including time alignment error between the two cells		
Note 5:	Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.		

Table A.4.5.2.12.1-5: SRSConf.1 Dedicated SRS Configuration for antenna port switching

SRSConf.1	1T2R ^{Note 1}		2T4R ^{Note 1}		1T4R ^{Note 1}			
srs-ResourceId	0	1	0	1	0	1	2	3
startPosition	5	[3]	5	[3]	5	[3]	5	[3]
nrofSymbols	1	1	1	1	1	1	1	1
nrofSRS-Ports	port1	port1	port2	port2	port1	port1	port1	port1
periodicityAndOffset-p	sl40, [1]	sl40, [1]	sl40, [1]	sl40, [1]	sl40, [1]	sl40, [1]	sl40, [6]	sl40, [6]
Note 1: 'xTxR' depends on indicated UE capability for SRS antenna port switching								
Note 2: SRS configurations follow (the dedicated configuration table) if the entries are included, otherwise following corresponding common configuration in A.3.24								

Table A.4.5.2.12.1-6: SRSConf.2 Dedicated SRS Configuration for antenna port switching

SRSConf.2	1T2R ^{Note 1}		2T4R ^{Note 1}		1T4R ^{Note 1}			
srs-ResourceId	0	1	0	1	0	1	2	3
startPosition	5	[3]	5	[3]	5	[3]	5	[3]
nrofSRS-Ports	port1	port1	port2	port2	port1	port1	port1	port1
nrofSymbols	1	1	1	1	1	1	1	1
periodicityAndOffset-p	sl80, [3]	sl80, [3]	sl80, [3]	sl80, [3]	sl80, [3]	sl80, [3]	sl80, [13]	sl80, [13]
Note 1: 'xTxR' depends on indicated UE capability for SRS antenna port switching								
Note 2: SRS configurations follow (the dedicated configuration table) if the entries are included, otherwise following corresponding common configuration in A.3.24								

A.4.5.2.12.2 Test Requirements

The UE shall be scheduled on Cell 1 and Cell3 continuously throughout the test. During the time duration T2, the interruption on Cell 1 shall not be more than the values specified in clause 7.32.2.18 in TS 36.133 [15] for each SRS transmission slot, and the interruption on Cell 3 shall not be more than the values specified in clause 8.2.1.2.18 for each SRS transmission slot

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.3 SCell Activation and Deactivation Delay

A.4.5.3.1 SCell Activation and deactivation of known SCell in FR1 for 160ms SCell measurement cycle

A.4.5.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements stated in clause 8.3, when the SCell in FR1 is known by the UE at the time of activation.

The supported test configurations for LTE PCell and NR PSCell are shown in table A.4.5.3.1.1-1 below. Supported test configurations for NR SCell are shown in table A.4.5.3.1.1-1A below. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently. The test parameters are given in Tables A.4.5.3.1.1-2 and cell-specific parameters in A.4.5.3.1.1-3 and A.4.5.3.1.1-4 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on NR. The UE now starts monitoring the SCell. The test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m , defines the start of time period T2. The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3. The UE shall start reporting CSI in PSCell after at least one CSI-RS transmission occasion for channel measurement plus $n_{\text{CSI_ref}}$ slots, as defined in 5.2.2.5 in [26], and reporting after slot $(m+k)$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2. Any E-UTRA PCell interruption due to activation of SCell shall occur in the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{EUTRA slot length}} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m , and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [14] clause 7.32.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted n , is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3. The starting point of any PSCell interruption due to the deactivation shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3. The starting point of any E-UTRA PCell interruption due to the deactivation shall occur in the subframe $n_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA subframe length}}$ to subframe $n_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{EUTRA subframe length}}$, where n_1 and n_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot n .

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for SCell is discontinued.

Table A.4.5.3.1.1-1: known FR1 SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration,	

Table A.4.5.3.1.1-1A: known FR1 SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations for NR SCell

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration,	

Table A.4.5.3.1.1-2: General test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	One E-UTRAN radio channel (1) and two NR radio channel (2,3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.1
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on E-UTRA RF channel number	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on secondary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell3 timing offset to cell2	μs	0	
Time alignment error between cell3 and cell2	μs	$\leq$ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.

T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
A3-offset	dB	-15	
T _{HARQ}	ms	k ₁ NR slot length	k ₁ is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by <i>dl-DataToUL-ACK</i> if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
T _{CSI_Reporting}	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe}, \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.4.5.3.1.1-3: Cell specific test parameters for NR PSCell for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 2		
			T1	T2	T3
SSB ARFCN			freq1		
Duplex mode	Config 1,4		FDD		
	Config 2,3,5,6		TDD		
TDD configuration	Config 1,4		Not Applicable		
	Config 2,5		TDDConf.1.1		
	Config 3,6		TDDConf.2.1		
BW _{channel}	Config 1,4	MHz	Note 7		
	Config 2,5		Note 7		
	Config 3,6		Note 7		
BW _{occupied}	Config 1,4	RB	52 ^{Note 5}		
	Config 2,5		52 ^{Note 5}		
	Config 3,6		106 ^{Note 6}		
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1		
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1		
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1		
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1		
DRX Cycle		ms	Not Applicable		
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD		
	Config 2,5		SR.1.1 TDD		
	Config 3,6		SR.2.1 TDD		
	Config 1,4		CR.1.1 FDD		

RMSI CORESET Reference Channel	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
OCNG Patterns	Config 1,2,4,5		OP.1 ^{Note 5}
	Config 3,6		OP.1 ^{Note 6}
SMTC configuration			SMTC.1
SSB configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2,5		CSI-RS.1.1 TDD
	Config 3,6		CSI-RS.2.1 TDD
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15
	Config 3,6		30
reportConfigType	Config 1-6		periodic
reportQuantity	Config 1-6		cri-RI-PMI-CQI
CSI reporting periodicity	Config 1,2,4,5	slot	5
	Config 3,6		10
CSI reporting offset	Config 1,2,4,5	slot	2
	Config 3,6		4
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N_{oc} ^{Note2}		dBm/15kHz	-104
N_{oc} ^{Note2}	Config 1,2,4,5	dBm/SCS	-104
	Config 3,6		-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP ^{Note3}	Config 1,2,4,5	dBm/SCS	-87
	Config 3,6		-84
SCH_RP ^{Note 3}		dBm/15 kHz	-87
Io ^{Note3}	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.87
Propagation condition		-	AWGN
Correlation Matrix and Antenna Configuration		-	2x2 Low
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.		
Note 3:	SS-RSRP, Io and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		

Note 4:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.]
Note 5:	All UL/DL transmission shall be confined within $BW_{\text{channel_actual-occupied}}$ (i.e. 10 MHz, 52 RBs) from $F_{C,\text{low}}$, and I_0 is independent of the BW_{channel} configured.
Note 6:	All UL/DL transmission shall be confined within $BW_{\text{channel_actual-occupied}}$ (i.e. 40 MHz, 106 RBs) from $F_{C,\text{low}}$, and I_0 is independent of the BW_{channel} configured.
Note 7:	$N_{\text{RB},c}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured BW_{channel} .

Table A.4.5.3.1.1-4: Cell specific test parameters for NR SCell for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 3		
			T1	T2	T3
SSB ARFCN			freq2		
Duplex mode	Config _{SCell} 1		FDD		
	Config _{SCell} 2,3		TDD		
TDD configuration	Config _{SCell} 1		Not Applicable		
	Config _{SCell} 2		TDDConf.1.1		
	Config _{SCell} 3		TDDConf.2.1		
BW_{channel}	Config _{SCell} 1	MHz	Note 7		
	Config _{SCell} 2		Note 7		
	Config _{SCell} 3		Note 7		
BW_{occupied}	Config _{SCell} 1	RB	52 ^{Note 5}		
	Config _{SCell} 2		52 ^{Note 5}		
	Config _{SCell} 3		106 ^{Note 6}		
DL initial BWP configuration	Config _{SCell} 1-3		DLBWP.0.1		
DL dedicated BWP configuration	Config _{SCell} 1-3		DLBWP.1.1		
UL initial BWP configuration	Config _{SCell} 1-3		ULBWP.0.1		
UL dedicated BWP configuration	Config _{SCell} 1-3		ULBWP.1.1		
DRX Cycle		ms	Not Applicable		
PDSCH Reference measurement channel	Config _{SCell} 1		SR.1.1 FDD		
	Config _{SCell} 2		SR.1.1 TDD		
	Config _{SCell} 3		SR.2.1 TDD		
RMSI CORESET Reference Channel	Config _{SCell} 1		CR.1.1 FDD		
	Config _{SCell} 2		CR.1.1 TDD		
	Config _{SCell} 3		CR.2.1 TDD		
RMC CORESET Reference Channel	Config _{SCell} 1		CCR.1.1 FDD		
	Config _{SCell} 2		CCR.1.1 TDD		
	Config _{SCell} 3		CCR.2.1 TDD		
TRS configuration	Config _{SCell} 1		TRS.1.1 FDD		
	Config _{SCell} 2		TRS.1.1 TDD		
	Config _{SCell} 3		TRS.1.2 TDD		
OCNG Patterns	Config _{SCell} 1,2		OP.1 ^{Note 5}		
	Config _{SCell} 3		OP.1 ^{Note 6}		
SMTc configuration			SMTc.1		
SSB configuration	Config _{SCell} 1,2		SSB.1 FR1		
	Config _{SCell} 3		SSB.2 FR1		
CSI-RS configuration for CSI reporting	Config _{SCell} 1		CSI-RS.1.1 FDD		
	Config _{SCell} 2		CSI-RS.1.1 TDD		
	Config _{SCell} 3		CSI-RS.2.1 TDD		
	Config _{SCell} 1,2	kHz	15		

PDSCH/PDCCH subcarrier spacing	Config _{SCell} 3		30
reportConfigType	Config _{SCell} 1-3		periodic
reportQuantity	Config _{SCell} 1-3		cri-RI-PMI-CQI
CSI reporting periodicity	Config _{SCell} 1,2	slot	5
	Config _{SCell} 3		10
CSI reporting offset	Config _{SCell} 1,2	slot	2
	Config _{SCell} 3		4
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNB DMRS to SSS ^{Note1}			
EPRE ratio of OCNB to OCNB DMRS ^{Note 1}			
N_{oc} ^{Note2}		dBm/15kHz	-104
N_{oc} ^{Note2}	Config _{SCell} 1,2	dBm/SCS	-104
	Config _{SCell} 3		-101
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
SS-RSRP ^{Note3}	Config _{SCell} 1,2	dBm/SCS	-87
	Config _{SCell} 3		-84
SCH_RP ^{Note 3}		dBm/15 kHz	-87
I _o ^{Note3}	Config _{SCell} 1,2	dBm/9.36MHz	-58.96
	Config _{SCell} 3	dBm/38.16MHz	-52.87
Propagation condition		-	AWGN
Correlation Matrix and Antenna Configuration		-	2x2 Low
Note 1: OCNB shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$. Note 3: SS-RSRP, I_o and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.] Note 5: All UL/DL transmission shall be confined within $BW_{channel_actual-occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{c,low}$, and I_o is independent of the $BW_{channel}$ configured. Note 6: All UL/DL transmission shall be confined within $BW_{channel_actual-occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{c,low}$, and I_o is independent of the $BW_{channel}$ configured. Note 7: $N_{RB,c}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.			

A.4.5.3.1.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to interruption. Whether CSI report in slot (m+k) was interrupted is checked by monitoring ACK/NACK sent in PCell in slot (m+k).

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, $T_{\text{activation_time}} = T_{\text{FirstSSB}} + 5\text{ms}$, as defined in clause 8.3.

During T3 the UE shall stop sending CSI reports for SCell at latest in a slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

During T2 interruption of PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{NR slot length}} + N_{\text{interruption}}$, and interruption of E-UTRA PCell during SCell activation shall not happen outside the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{EUTRA slot length}} + N_{\text{interruption}}$, as defined in clause 8.3.

During T3 the starting point of interruption of PSCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3 and the starting point of interruption of E-UTRA PCell during SCell deactivation shall not happen outside the subframe $n_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA subframe length}}$ to subframe $n_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{EUTRA subframe length}}$.

The interruption of PSCell shall not be more than the values specified for EN-DC in Clause 8.2.1.2.4.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.4.5.3.2 SCell Activation and deactivation of known SCell in FR1 for 640ms SCell measurement cycle

A.4.5.3.2.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.4.5.3.1.1. The supported test configurations are the same as defined in clause A.4.5.3.1.1. The test parameters are the same except those described in the following clause. The listed parameter values in Tables A.4.5.3.2.1-1 will replace the values of corresponding parameters in Tables A.4.5.3.1.1-2.

Table A.4.5.3.2.1-1: General test parameters for known FR1 SCell activation case, 640ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

A.4.5.3.2.2 Test Requirements

The test requirements defined in clause A.4.5.3.1.2 shall apply to this test case, except $T_{\text{activation_time}}$ will be replaced with the value $T_{\text{FirstSSB_MAX}} + T_{\text{rs}} + 5\text{ms}$.

A.4.5.3.3 SCell Activation and deactivation of unknown SCell in FR1

A.4.5.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements stated in clause 8.3, when the SCell in FR1 is unknown by the UE at the time of activation.

The supported test configurations are defined in clause A.4.5.3.1.1. The test parameters are the same except those described in the following clause. The listed parameter values in Tables A.4.5.3.3.1-1 will replace the values of corresponding parameters in Tables A.4.5.3.1.1-2. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. Cell 1 and Cell 2 have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRAN and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on NR. During T1 the SCell is powered off and UE is not aware of SCell.

A MAC message for activation of SCell is sent by the test equipment 100ms after the RRC message, in a slot # denoted m . The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2. The UE shall be able to report valid CSI for the activated SCell at latest in slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$ as defined in clause 8.3 provided the SCell can be successfully detected on the first attempt. The UE shall start reporting CSI after at least one CSI-RS transmission occasion for channel measurement plus $n_{\text{CSI_ref}}$ slots, as defined in 5.2.2.5 in [26], and reporting after slot $(m+k)$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2. Any E-UTRA PCell interruption due to activation of SCell shall occur in the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{EUTRA slot length}} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m , and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [14] clause 7.32.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n , is received at the UE antenna connector. The UE shall carry out deactivation of the SCell at latest in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ as defined in clause 8.3. The starting point of any PSCell interruption due to the deactivation shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3. The starting point of any E-UTRA PCell interruption due to the deactivation shall occur in the subframe $n_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA subframe length}}$ to subframe $n_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{EUTRA subframe length}}$, where n_1 and n_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot n .

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell1 deactivation command is sent until CSI reporting for SCell1 is discontinued.

Table A.4.5.3.3.1-1: General test parameters for unknown FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
T1	ms	100	During this time the PSCell shall be known and the SCell configured, but not detected.

A.4.5.3.3.2 Test Requirements

The test requirements defined in clause A.4.5.3.1.2 shall apply to this test case, except $T_{\text{activation_time}}$ will be replaced with the value $T_{\text{FirstSSB_MAX}} + T_{\text{SMTc_MAX}} + 2 \cdot T_{\text{rs}} + 5\text{ms}$ as defined in clause 8.3.

A.4.5.3.4 SCell Activation and deactivation of multiple unknown SCells in FR1 with single activation/deactivation command

A.4.5.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the multiple SCell activation and deactivation times are within the requirements stated in clause 8.3.7 and 8.3.8, when the two configured deactivated SCells in FR1 are unknown by the UE at the time of activation.

The supported test configurations are the same as defined in clause A.4.5.3.1.1. The test parameters are the same except those described in the following clause. The listed parameter values in Table A.4.5.3.4.1-1 will replace the values of corresponding parameters in Table A.4.5.3.1.1-2. The cell specific test parameter values in Table A.4.5.3.4.1-2 will replace the values of corresponding parameters in Table A.4.5.3.1.1-3.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are four carriers, E-UTRA has one cell, NR has three cells. Cell 1 and Cell 2 have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRAN and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) and Cell 4 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCells (Cell 3 and Cell 4) become configured on NR. During T1 the SCells (Cell 3 and Cell 4) are powered off and UE is not aware of SCells.

A MAC message for activation of SCells (Cell 3 and Cell 4) is sent by the test equipment 100ms after the RRC message, in a slot # denoted m . The point in time at which the MAC message for activation of SCells is received at the UE antenna connector defines the start of time period T2. Immediately at beginning of T2 the transmission power of cell 3 and cell 4 are increased to same level as for cell 2. The UE shall be able to report valid CSI for the activated SCells (Cell 3 and Cell 4) at latest in slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time_multiple_cells}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$ respectively as defined in clause 8.3.7 provided the SCells can be successfully detected on the first attempt. The UE shall start reporting CSI for cell 3 and cell 4 after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $(m+k)$ and shall report CQI index 0 (out-of-range) until the SCell activation for cell 3 and cell 4 has been completed, respectively. Any PSCell interruption due to activation of SCells shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in section 8.2. Any E-UTRA PCell interruption due to activation of SCells shall occur in the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{EUTRA slot length}} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m , and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [14] clause 7.32.

Time period T3 starts when a MAC message for deactivation of the SCells (Cell 3 and Cell 4), sent from the test equipment to the UE in a slot # denoted n , is received at the UE antenna connector. The UE shall carry out deactivation of the SCells at latest in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ as defined in clause 8.3. The starting point of any PSCell interruption due to the deactivation shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3. The starting point of any E-UTRA PCell interruption due to the deactivation shall occur in the subframe $n_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA subframe length}}$ to subframe $n_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{EUTRA subframe length}}$, where n_1 and n_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot n .

The test equipment verifies the activation time for Cell 3 by counting the slots from the time when the SCell activation command is sent until CSI report of activated Cell 3 with other than CQI index 0 is received.

The test equipment verifies the activation time for Cell 4 by counting the slots from the time when the SCell activation command is sent until CSI report of activated Cell 4 with other than CQI index 0 is received.

The test equipment verifies the deactivation time for Cell 3 by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for Cell 3 is discontinued.

The test equipment verifies the deactivation time for Cell 4 by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for Cell 4 is discontinued.

Table A.4.5.3.4.1-1: General test parameters for unknown FR1 SCell activation case with 2 deactivated SCells, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
Configured deactivated SCell 1		Cell 3	Configured deactivated secondary cell on NR RF channel number 3 which is an intra-band contiguous CC to PSCC of Cell 2; <i>ssb-PositionInBurst</i> of Cell 3 is same as the one for Cell 2
Configured deactivated SCell 2		Cell 4	Configured deactivated secondary cell on NR RF channel number 4 which is an inter-band CC to PSCC of Cell 2
Cell3 timing offset to cell2	μs	0	
Cell4 timing offset to cell2	μs	0	
Time alignment error between cell3 and cell2	μs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
Time alignment error between cell4 and cell2	μs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	ms	100	During this time the PSCell shall be known and the SCell configured, but not detected.

Table A. 4.5.3.4.1-2: Cell specific test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 3		Cell 4	
			T2	T3	T2	T3
SSB ARFCN			Freq2		Freq3	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2,5		TDDConf.1.1			
	Config 3,6		TDDConf.2.1			
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52			
	Config 2,5		10: N _{RB,c} = 52			
	Config 3,6		40: N _{RB,c} = 106			
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1			
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1			

UL initial BWP configuration		Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration		Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
DRX Cycle			ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4			SR.1.1 FDD	SR.1.1 FDD
	Config 2,5			SR.1.1 TDD	SR.1.1 TDD
	Config 3,6			SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4			CR.1.1 FDD	CR.1.1 FDD
	Config 2,5			CR.1.1 TDD	CR.1.1 TDD
	Config 3,6			CR.2.1 TDD	CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4			CCR.1.1 FDD	CCR.1.1 FDD
	Config 2,5			CCR.1.1 TDD	CCR.1.1 TDD
	Config 3,6			CCR.2.1 TDD	CCR.2.1 TDD
TRS configuration	Config 1,4			TRS.1.1 FDD	TRS.1.1 FDD
	Config 2,5			TRS.1.1 TDD	TRS.1.1 TDD
	Config 3,6			TRS.1.2 TDD	TRS.1.2 TDD
OCNG Patterns				OP.1	
SMTC configuration				SMTC.1	
SSB configuration	Config 1,2,4,5			SSB.1 FR1	
	Config 3,6			SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5		kHz	15 kHz	
	Config 3,6			30kHz	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc}^{Note2}			dBm/15kHz	-104	
N_{oc}^{Note2}	Config 1,2,4,5		dBm/SCS	-104	
	Config 3,6			-101	
$\hat{E}_s/I_{ot}$			dB	17	
$\hat{E}_s/N_{oc}$			dB	17	
SS-RSRP ^{Note3}	Config 1,2,4,5		dBm/SCS	-87	
	Config 3,6			-84	
SCH_RP ^{Note 3}			dBm/15 kHz	-87	
Propagation condition			-	AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3:	SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not setttable parameters themselves.				
Note 4:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.				

A.4.5.3.4.2 Test Requirements

The test requirements defined in clause A.4.5.3.1.2 shall apply to this test case for both Cell 3 and Cell 4, except the followings:

- For Cell 3 activation delay, $T_{\text{activation_time}}$ will be replaced with the value $T_{\text{activation_time_multiple_scells}} = T_{\text{FirstSSB_MAX_multiple_scells}} + T_{\text{SMTC_MAX_multiple_scells}} + T_{\text{rs}} + 5\text{ms}$ as defined in clause 8.3.7.
- For Cell 4 activation delay, $T_{\text{activation_time}}$ will be replaced with the value $T_{\text{activation_time_multiple_scells}} = T_{\text{FirstSSB_MAX_multiple_scells}} + T_{\text{SMTC_MAX_multiple_scells}} + 2 * T_{\text{rs}} + 5\text{ms}$ as defined in clause 8.3.7.

A.4.5.3.5 Direct SCell activation at SCell addition of known SCell in FR1

A.4.5.3.5.1 Test Purpose and Environment

The purpose of this test is to verify that the direct SCell activation time is within the requirements stated in clause 8.3.4, when the SCell in FR1 is known by the UE at the time of activation.

The supported test configurations for LTE PCell and NR PSCell are shown in table A.4.5.3.5.1-1 below. The supported test configurations for NR SCell are shown in table A.4.5.3.5.1-1A below. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently. The test parameters are given in Tables A.4.5.3.5.1-2 and cell-specific parameters in A.4.5.3.5.1-3 and A.4.5.3.5.1-4 below. The test consists of two successive time periods, with duration of T1 and T2, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the measurement on Cell 3 is configured. The UE now starts measuring the Cell 3. During T1, Cell 3 should be detected and measured by the UE such that it meets the condition for known cell defined in clause 8.3.4 for direct SCell activation. At the end of T1, the test equipment sends an RRC message for direct SCell activation of the Cell 3.

The point in time at which the RRC message for direct SCell activation is received at the UE antenna connector, in a slot # denoted m , defines the start of time period T2. The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot $m + \frac{N_{\text{direct}}}{\text{NR slot length}}$, as defined in clause 8.3.4. The UE shall start reporting CSI in PSCell in slot $(m+k+T_{\text{RRC_process}})$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1$ to slot $m + 1 + \frac{T_{\text{RRC_Process}} + T_1 + T_X}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3.4, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2. Any E-UTRA PCell interruption due to activation of SCell shall occur in the subframe $m_1 + 1$ to subframe $m_2 + 1 + \frac{T_{\text{RRC_Process}} + T_1 + T_X}{\text{NR slot length}} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m , and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [14] clause 7.32.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation of SCell.

The test equipment verifies the activation time by counting the slots from the time when the direct SCell activation command is sent until a CSI report with other than CQI index 0 is received.

Table A.4.5.3.5.1-1: known FR1 direct SCell activation supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode

4	LTE TDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration.	

Table A.4.5.3.5.1-1A: known FR1 direct SCell activation supported test configurations for NR SCell

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration	

Table A.4.5.3.5.1-2: General test parameters for known FR1 direct SCell activation

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	One E-UTRAN radio channel (1) and two NR radio channel (2,3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.1
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
SCell		Cell 3	Secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every four slots.
Cell-individual offset for cells on E-UTRA RF channel number	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on secondary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell3 timing offset to cell2	μs	0	
Time alignment error between cell3 and cell2	μs	$\leq$ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the Cell 3 shall be known.
T2	s	1	During this time the UE shall activate the SCell.
A3-offset	dB	-15	

T_{HARQ}	ms	$k_1 \times \text{NR slot length}$	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by <i>dl-DataToUL-ACK</i> if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
$T_{\text{CSI_Reporting}}$	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k	ms	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe}, \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.4.5.3.5.1-3: Cell specific test parameters for NR PSCell for known FR1 direct SCell activation

Parameter		Unit	Cell 2	
			T1	T2
SSB ARFCN			freq1	
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
TDD configuration	Config 1,4		Not Applicable	
	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
BW_{channel}	Config 1,4	MHz	10: $N_{\text{RB},c} = 52$	
	Config 2,5		10: $N_{\text{RB},c} = 52$	
	Config 3,6		40: $N_{\text{RB},c} = 106$	
DL initial BWP configuration	Config 1,2,3,4,5,6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1,2,3,4,5,6		DLBWP.1.1	
UL initial BWP configuration	Config 1,2,3,4,5,6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1,2,3,4,5,6		ULBWP.1.1	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD	
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	
	Config 2,5		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD	
TRS configuration	Config 1,4		TRS.1.1 FDD	
	Config 2,5		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD	
OCNG Patterns			OP.1	
SMTC configuration			SMTC.1	
SSB configuration	Config 1,2,4,5		SSB.1 FR1	
	Config 3,6		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	
	Config 3,6		30kHz	

CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2,5		CSI-RS.1.1 TDD
	Config 3,6		CSI-RS.2.1 TDD
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15
	Config 3,6		30
reportConfigType	Config 1-6		periodic
reportQuantity	Config 1-6		cri-RI-PMI-CQI
CSI reporting periodicity	Config 1,2,4,5	slot	5
	Config 3,6		10
CSI reporting offset	Config 1,2,4,5	slot	2
	Config 3,6		4
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N_{oc} ^{Note2}		dBm/15kHz	-104
N_{oc} ^{Note2}	Config 1,2,4,5	dBm/SCS	-104
	Config 3,6		-101
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
SS-RSRP ^{Note3}	Config 1,2,4,5	dBm/SCS	-87
	Config 3,6		-84
SCH_RP ^{Note 3}		dBm/15 kHz	-87
Propagation condition		-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.			

Table A.4.5.3.5.1-4: Cell specific test parameters for NR SCell for known FR1 direct SCell activation

Parameter		Unit	Cell 3	
			T1	T2
SSB ARFCN			freq2	
Duplex mode	Config _{SCell} 1		FDD	
	Config _{SCell} 2,3		TDD	
TDD configuration	Config _{SCell} 1		Not Applicable	
	Config _{SCell} 2		TDDConf.1.1	
	Config _{SCell} 3		TDDConf.2.1	

BW _{channel}	Config _{SCell} 1	MHz	10: N _{RB,c} = 52
	Config _{SCell} 2		10: N _{RB,c} = 52
	Config _{SCell} 3		40: N _{RB,c} = 106
DL initial BWP configuration	Config _{SCell} 1,2,3		DLBWP.0.1
DL dedicated BWP configuration	Config _{SCell} 1,2,3		DLBWP.1.1
UL initial BWP configuration	Config _{SCell} 1,2,3		ULBWP.0.1
UL dedicated BWP configuration	Config _{SCell} 1,2,3		ULBWP.1.1
DRX Cycle		ms	Not Applicable
PDSCH Reference measurement channel	Config _{SCell} 1		SR.1.1 FDD
	Config _{SCell} 2		SR.1.1 TDD
	Config _{SCell} 3		SR.2.1 TDD
RMSI CORESET Reference Channel	Config _{SCell} 1		CR.1.1 FDD
	Config _{SCell} 2		CR.1.1 TDD
	Config _{SCell} 3		CR.2.1 TDD
RMC CORESET Reference Channel	Config _{SCell} 1		CCR.1.1 FDD
	Config _{SCell} 2		CCR.1.1 TDD
	Config _{SCell} 3		CCR.2.1 TDD
TRS configuration	Config _{SCell} 1		TRS.1.1 FDD
	Config _{SCell} 2		TRS.1.1 TDD
	Config _{SCell} 3		TRS.1.2 TDD
OCNG Patterns			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config _{SCell} 1,2		SSB.1 FR1
	Config _{SCell} 3		SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	Config _{SCell} 1,2	kHz	15
	Config _{SCell} 3		30
CSI-RS configuration for CSI reporting	Config _{SCell} 1		CSI-RS.1.1 FDD
	Config _{SCell} 2		CSI-RS.1.1 TDD
	Config _{SCell} 3		CSI-RS.2.1 TDD
PDSCH/PDCCH subcarrier spacing	Config _{SCell} 1,2	kHz	15
	Config _{SCell} 3		30
reportConfigType	Config _{SCell} 1-3		periodic
reportQuantity	Config _{SCell} 1-3		cri-RI-PMI-CQI
CSI reporting periodicity	Config _{SCell} 1,2	slot	5
	Config _{SCell} 3		10
CSI reporting offset	Config _{SCell} 1,2	slot	2
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N_{oc} ^{Note2}		dBm/15kHz	-104
N_{oc} ^{Note2}	Config _{SCell} 1,2	dBm/SCS	-104

	Config _{SCell} 3		-101
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
SS-RSRP ^{Note3}	Config _{SCell} 1,2	dBm/SCS	-87
	Config _{SCell} 3		-84
SCH_RP ^{Note 3}		dBm/15 kHz	-87
Propagation condition		-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.			

A.4.5.3.5.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot $(m+k+T_{RRC_process})$. UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to interruption. Whether CSI report in slot $(m+k+T_{RRC_process})$ was interrupted is checked by monitoring ACK/NACK sent in PCell in slot $(m+k+T_{RRC_process})$.

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $m + \frac{N_{direct}}{NR_slot_length}$. $N_{direct} = T_{RRC_Process} + T_1 + T_{activation_time} + T_{CSI_Reporting} - 3ms$, where $T_{RRC_Process} = 20$ ms and other components are defined in clause 8.3.4.

During T2 interruption of PSCell during direct SCell activation shall not happen outside the slot $m + 1$ to $m + 1 + \frac{T_{RRC_Process} + T_1 + T_X}{NR_slot_length} + N_{interruption}$, and interruption of E-UTRA PCell during SCell activation shall not happen outside the subframe $m_1 + 1$ to subframe $m_2 + 1 + \frac{T_{RRC_Process} + T_1 + T_X}{NR_slot_length} + N_{interruption}$, as defined in clause 8.3.4.

The interruption of PSCell shall not be more than the values specified for EN-DC in Clause 8.2.1.2.8.

All of the above test requirements shall be fulfilled in order for the observed direct SCell activation delay to be counted as correct. The rate of correct observed direct SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $m + \frac{T_{RRC_Process} + T_1 + T_X}{NR_slot_length}$ as defined in clause 8.3.4 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.4.5.3.6 Fast SCell Activation of known SCell in FR1 for 160ms SCell measurement cycle

A.4.5.3.6.1 Test Purpose and Environment

The purpose of this test is to verify that the fast SCell activation times are within the requirements stated in clause 8.3.16, when the SCell in FR1 is known by the UE at the time of activation.

The supported test configurations are shown in table A.4.5.3.6.1-1 below. The test parameters are given in Tables A.4.5.3.6.1-2 and cell-specific parameters in A.4.5.3.6.1-3 below. The test consists of two successive time periods, with duration of T1 and T2, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on NR. The UE now starts monitoring the SCell. The test equipment sends a MAC message for activation of the SCell and triggering the aperiodic CSI-RS for fast SCell activation.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m , defines the start of time period T2. The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3. The UE shall start reporting CSI in PSCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $(m+k)$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2. Any E-UTRA PCell interruption due to activation of SCell shall occur in the subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{EUTRA slot length}} + N_{\text{interruption}}$, where m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m , and $N_{\text{interruption}}$ is the interruption length given in TS 36.133 [14] clause 7.32.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

Table A.4.5.3.6.1-1: fast known FR1 SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth (BW_{channel}) defined in each test configuration,

Table A.4.5.3.6.1-2: General test parameters for fast known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	One E-UTRAN radio channel (1) and two NR radio channel (2,3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.1
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.

Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on E-UTRA RF channel number	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on secondary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell3 timing offset to cell2	μs	0	
Time alignment error between cell3 and cell2	μs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
A3-offset	dB	-15	
T _{HARQ}	ms	k ₁ NR slot length	k ₁ is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by <i>dl-DataToUL-ACK</i> if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
T _{CSI_Reporting}	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe}, \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A. 4.5.3.6.1-3: Cell specific test parameters for fast known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 2		Cell 3	
			T1	T2	T1	T2
SSB ARFCN			freq1		freq2	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2,5		TDDConf.1.1			
	Config 3,6		TDDConf.2.1			
BW _{channel}	Config 1,4	MHz	Note 7			
	Config 2,5		Note 7			
	Config 3,6		Note 7			
BW _{occupied}	Config 1,4	RB	52 ^{Note 5}			
	Config 2,5		52 ^{Note 5}			
	Config 3,6		106 ^{Note 6}			

DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
Aperiodic CSI-RS for Scell activation	Config 1,4		N/A	TRS.1.3 FDD
	Config 2,5		N/A	TRS.1.3 TDD
	Config 3,6		N/A	TRS.1.4 TDD
gapBetweenBursts		Slot	N/A	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.1.1 FDD
	Config 2,5		SR.1.1 TDD	SR.1.1 TDD
	Config 3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.1.1 FDD
	Config 2,5		CR.1.1 TDD	CR.1.1 TDD
	Config 3,6		CR.2.1 TDD	CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD	CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD	CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD	TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD	TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD	TRS.1.2 TDD
OCNG Patterns	Config 1,2,4,5		OP.1 ^{Note 5}	
	Config 3,6		OP.1 ^{Note 6}	
SMTC configuration			SMTC.1	
SSB configuration	Config 1,2,4,5		SSB.1 FR1	
	Config 3,6		SSB.2 FR1	
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	
	Config 2,5		CSI-RS.1.1 TDD	
	Config 3,6		CSI-RS.2.1 TDD	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15	
	Config 3,6		30	
reportConfigType	Config 1-6		periodic	
reportQuantity	Config 1-6		cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2,4,5	slot	5	N/A
CSI reporting offset	Config 3,6	slot	10	N/A
	Config 1,2,4,5		2	N/A
	Config 3,6		4	N/A
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note2}		dBm/15kHz	-104	
N_{oc} ^{Note2}	Config 1,2,4,5	dBm/SCS	-104	
	Config 3,6		-101	
$\hat{E}_s / I_{ot}$		dB	17	

$\hat{E}_s / N_{oc}$		dB	17	
SS-RSRP ^{Note3}	Config 1,2,4,5	dBm/SCS	-87	NA
	Config 3,6		-84	NA
CSI-RSRP ^{Note3}	Config 1,2,4,5	dBm/SCS	NA	-87
	Config 3,6		NA	-84
SS-RSRP ^{Note3}	Config 1,2,4,5	dBm/SCS	-87	
	Config 3,6		-84	
CSI-RSRP ^{Note3}	Config 1,2,4,5	dBm/SCS	-87	
	Config 3,6		-84	
SCH_RP ^{Note 3}		dBm/15 kHz	-87	
Propagation condition		-	AWGN	
I _o ^{Note3}	Config 1,2,4,5	dBm/ 9.36MHz	-58.96	
	Config 3,6	dBm/ 38.16MHz	-52.87	
Note 1: OCNB shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.				
Note 3: SS-RSRP, I _o and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.]				
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I _o is independent of the $BW_{channel}$ configured.				
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I _o is independent of the $BW_{channel}$ configured.				
Note 7: $N_{RB,c}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.				

A.4.5.3.6.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to interruption. Whether CSI report in slot (m+k) was interrupted is checked by monitoring ACK/NACK sent in PCell in slot (m+k).

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $m + \frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstATRS} + 5ms$, as defined in clause 8.3.

During T2 interruption of PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $m + 1 + \frac{T_{HARQ} + 3ms + T_X}{NR\ slot\ length} + N_{interruption}$, and interruption of E-UTRA PCell during SCell activation shall not happen outside the subframe $m_1 + 1 + \frac{T_{HARQ}}{EUTRA\ slot\ length}$ to subframe $m_2 + 1 + \frac{T_{HARQ} + 3ms + T_X}{EUTRA\ slot\ length} + N_{interruption}$, as defined in clause 8.3.

The interruption of PSCell shall not be more than the values specified for EN-DC in Clause 8.2.1.2.19.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $m + \frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.4.5.3.7 Fast SCell Activation of known SCell in FR1 for 640 ms SCell measurement cycle

A.4.5.3.7.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.4.5.3.6.1. The supported test configurations are the same as defined in clause A.4.5.3.6.1. The test parameters are the same except those described in the following clause. The listed parameter values in Tables A.4.5.3.7.1-1 will replace the values of corresponding parameters in Tables A.4.5.3.6.1-2. The listed parameter values in Tables A.4.5.3.7.1-2 will replace the values of corresponding parameters in Tables A.4.5.3.6.1-3.

Table A.4.5.3.7.1-1: General test parameters for known FR1 SCell activation case, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

Table A. 4.5.3.7.1-2: Cell specific test parameters for known FR1 SCell activation case, 640ms SCell measurement cycle

Parameter		Unit	Cell 2		Cell 3	
			T1	T2	T1	T2
gapBetweenBursts		Slot	2			

A.4.5.3.7.2 Test Requirements

The test requirements defined in clause A.4.5.3.6.2 shall apply to this test case, except $T_{\text{activation_time}}$ will be replaced with the value $T_{\text{FirstATRS}} + T_{\text{gap}} + T_{\text{ATRS}} + 5\text{ms}$.

A.4.5.4 UE UL carrier RRC reconfiguration Delay

A.4.5.4.1 UE UL carrier RRC reconfiguration Delay

Table A.4.5.4.1-1 - Table A.4.5.4.1-4 : Void

A.4.5.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that when the UE receives a RRC message implying NR UL or Supplementary UL carrier configuration, the UE shall be ready to start transmission on the newly configured carrier within the time limits specified in clause 8.4.2 and 8.4.3 for configuring and deconfiguring, respectively.

There are three cells: E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and FR1 SCell (Cell 3). For SCell, both NR uplink and supplementary uplink are broadcast by *ServingCellConfigCommonSIB*. The test parameters for PSCell and SCell are given in Table A. 4.5.4.1.1-1, Table A. 4.5.4.1.1-2, Table A. 4.5.4.1.1-3 and Table A. 4.5.4.1.1-4 below. The test parameters and applicability for E-UTRAN PCell are defined in A.3.7.2. The test consists two tests. The test consists of three time periods, with duration of T1, T2 and T3 respectively. During time duration T1, NR uplink of cell 3 is configured to UE. At the start of T2, a supplementary uplink of cell3 is configured to UE through *RRCReconfiguration*, then UE shall start transmission on the supplementary uplink. At the start of T3, the supplementary uplink is released through *RRCReconfiguration*.

Table A.4.5.4.1.1-1: Supported test configurations

Configuration	PSCell (Cell2)	SCell (Cell3)
---------------	----------------	---------------

1	15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode	DL and UL: 15kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode; SUL: 15kHz SCS, ≥ 10 MHz bandwidth, SUL duplex mode
2	15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode	DL and UL: 15kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode; SUL: 15kHz SCS, ≥ 10 MHz bandwidth, SUL duplex mode
3	15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode	DL and UL: 30kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥ 40 MHz bandwidth, SUL duplex mode
4	15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode	DL and UL: 15kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode; SUL: 15kHz SCS, ≥ 10 MHz bandwidth, SUL duplex mode
5	15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode	DL and UL: 15kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode; SUL: 15kHz SCS, ≥ 10 MHz bandwidth, SUL duplex mode
6	15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode	DL and UL: 30kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥ 40 MHz bandwidth, SUL duplex mode
7	30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode	DL and UL: 15kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode; SUL: 15kHz SCS, ≥ 10 MHz bandwidth, SUL duplex mode
8	30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode	DL and UL: 15kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode; SUL: 15kHz SCS, ≥ 10 MHz bandwidth, SUL duplex mode
9	30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode	DL and UL: 30kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥ 40 MHz bandwidth, SUL duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations		
Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration,		

Table A.4.5.4.1.1-2: General test parameters for EN-DC UE UL carrier RRC reconfiguration Delay

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1,2,3, 4, 5, 6, 7, 8, 9	1, 2, 3	Three radio channels are used for this test.
Active cell		Config 1,2,3, 4, 5, 6, 7, 8, 9	Cell 1: E-UTRAN PCell Cell 2: FR1 PSCell Cell 3: FR1 SCell	E-UTRAN PCell on RF channel number 1 FR1 PSCell on RF channel number 2 FR1 SCell on RF channel number 3
CP length		Config 1,2,3, 4, 5, 6, 7, 8, 9	Normal	
DRX		Config 1,2,3, 4, 5, 6, 7, 8, 9	OFF	
Measurement gap pattern Id		Config 1,2,3, 4, 5, 6, 7, 8, 9	OFF	
Filter coefficient		Config 1,2,3, 4, 5, 6, 7, 8, 9	0	L3 filtering is not used

T1	s	Config 1,2,3, 4, 5, 6, 7, 8, 9	5	
T2	s	Config 1,2,3, 4, 5, 6, 7, 8, 9	5	
T3	s	Config 1,2,3, 4, 5, 6, 7, 8, 9	5	

Table A.4.5.4.1.1-3: NR Cell specific test parameters for EN-DC UE UL carrier RRC reconfiguration Delay on PSCell (Cell 2)

Parameter	Unit	Test Configuration	Test 1		
			T1	T2	T3
Channel number		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	2		
TDD configuration		Conf 1, 2, 3	N/A		
		Conf 4, 5, 6	TDD Conf.1.1		
		Conf 7, 8, 9	TDD Conf.2.1		
BW _{channel}	MHz	Conf 1, 2, 3	Note 6		
		Conf 4, 5, 6	Note 6		
		Conf 7, 8, 9	Note 6		
BW _{occupied}	RB	Conf 1, 2, 3	52 ^{Note 4}		
		Conf 4, 5, 6	52 ^{Note 4}		
		Conf 7, 8, 9	106 ^{Note 5}		
PDSCH reference measurement channel as defined in A.3.1.1		Conf 1, 2, 3	SR.1.1 FDD		
		Conf 4, 5, 6	SR.1.1 TDD		
		Conf 7, 8, 9	SR 2.1 TDD		
RMSI CORESET reference measurement channel as defined in A.3.1.2		Conf 1, 2, 3	CR.1.1 FDD		
		Conf 4, 5, 6	CR.1.1 TDD		
		Conf 7, 8, 9	CR.2.1 TDD		
RMC CORESET reference measurement channel as defined in A.3.1.3		Conf 1, 2, 3	CCR.1.1 FDD		
		Conf 4, 5, 6	CCR.1.1 TDD		
		Conf 7, 8, 9	CCR.2.1 TDD		
OCNG Pattern ^{Note 1}		Conf 1, 2, 3, 4, 5, 6	OP.1 ^{Note 4}		
		Config 7, 8, 9	OP.1 ^{Note 5}		
SSB configuration		Conf 1, 2, 3, 4, 5, 6	SSB.1 FR1		
		Conf 7, 8, 9	SSB.2 FR1		
SMTc configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	SMTc.1		
CSI-RS for tracking		Conf 1	TRS.1.1 FDD		
		Conf 2	TRS.1.1 FDD		
		Conf 3	TRS.1.1 FDD		
		Conf 4	TRS.1.1 TDD		
		Conf 5	TRS.1.1 TDD		
		Conf 6	TRS.1.1 TDD		
		Conf 7	TRS.1.2 TDD		
		Conf 8	TRS.1.2 TDD		
DL initial BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.0.1		
DL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.1.1		

UL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	ULBWP.1.1		
EPRE ratio of PSS to SSS	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	0		
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} ^{Note 2}	dBm / 15kHz	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	-102		
	dBm/SCS	Conf 1,2,3,4,5,6	-102		
		Conf 7,8,9	-99		
$\hat{E}_s / N_{oc}$	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16
$\hat{E}_s / I_{ot}$ ^{Note 3}	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16
SS-RSRP ^{Note 3}	dBm/SCS	Conf 1,2,3,4,5,6	-86	-86	-86
		Conf 7,8,9	-83	-83	-83
I_o ^{Note 3}	dBm/ 9.36 MHz	Conf 1,2,3,4,5,6	-57.9	-57.9	-57.9
	dBm/ 38.16 MHz	Conf 7,8,9	-51.8	-51.8	-51.8
Propagation Condition		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	AWGN		
Antenna configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	1 x 2		

NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.

NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.

NOTE 3: $\hat{E}_s/I_{ot}$, I_o , and SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

NOTE 4: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.

NOTE 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.

NOTE 6: $N_{RB,C}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.

Table A.4.5.4.1.1-4: NR Cell specific test parameters for EN-DC UE UL carrier RRC reconfiguration Delay on SCell (Cell 3)

Parameter	Unit	Test Configuration	Test 1		
			T1	T2	T3
Channel number		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	3		
TDD configuration		Conf 1, 4, 7	N/A		
		Conf 2, 5, 8	TDDConf.1.1		
		Conf 3, 6, 9	TDDConf.2.1		
$BW_{channel}$	MHz	Conf 1, 4, 7	Note 6		
		Conf 2, 5, 8	Note 6		
		Conf 3, 6, 9	Note 6		
$BW_{occupied}$	RB	Conf 1, 4, 7	52 ^{Note 4}		
		Conf 2, 5, 8	52 ^{Note 4}		
		Conf 3, 6, 9	106 ^{Note 5}		
PUSCH parameters for NR UL carrier		Conf 1, 4, 7	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]
		Conf 2, 5, 8	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]
		Conf 3, 6, 9	G-FR1-A3-14 in [13]	G-FR1-A3-14 in [13]	G-FR1-A3-14 in [13]
PUCCH parameters For NR UL carrier		Conf 1, 4, 7	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]
		Conf 2, 5, 8	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]
		Conf 3, 6, 9	Table 8.3.3.1.2-2 in [13]	Table 8.3.3.1.2-2 in [13]	Table 8.3.3.1.2-2 in [13]
PUSCH parameters for supplementary UL		Conf 1, 4, 7	N/A	G-FR1-A3-10 in [13]	N/A

		Conf 2, 5, 8	N/A	G-FR1-A3-10 in [13]	N/A
		Conf 3, 6, 9	N/A	G-FR1-A3-14 in [13]	N/A
PUCCH parameters for supplementary UL		Conf 1, 4, 7	N/A	N/A	N/A
		Conf 2, 5, 8	N/A	N/A	N/A
		Conf 3, 6, 9	N/A	N/A	N/A
PDSCH reference measurement channel as defined in A.3.1.1		Conf 1, 4, 7	SR.1.1 FDD		
		Conf 2, 5, 8	SR.1.1 TDD		
		Conf 3, 6, 9	SR 2.1 TDD		
RMSI CORESET reference measurement channel as defined in A.3.1.2		Conf 1, 4, 7	CR.1.1 FDD		
		Conf 2, 5, 8	CR.1.1 TDD		
		Conf 3, 6, 9	CR.2.1 TDD		
RMC CORESET reference measurement channel as defined in A.3.1.3		Conf 1, 4, 7	CCR.1.1 FDD		
		Conf 2, 5, 8	CCR.1.1 TDD		
		Conf 3, 6, 9	CCR.2.1 TDD		
OCNG Pattern ^{Note 1}		Conf 1, 2, 4, 5, 7, 8	OP.1 ^{Note 4}		
		Conf 3, 6, 9	OP.1 ^{Note 5}		
SSB configuration		Conf 1, 2, 4, 5, 7, 8	SSB.1 FR1		
		Conf 3, 6, 9	SSB.2 FR1		
SMTTC configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	SMTTC.1		
CSI-RS for tracking		Conf 1	TRS.1.1 FDD		
		Conf 2	TRS.1.1 TDD		
		Conf 3	TRS.1.2 TDD		
		Conf 4	TRS.1.1 FDD		
		Conf 5	TRS.1.1 TDD		
		Conf 6	TRS.1.2 TDD		
		Conf 7	TRS.1.1 FDD		
		Conf 8	TRS.1.1 TDD		
		Conf 9	TRS.1.2 TDD		
DL initial BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.0.1		
DL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.1.1		
UL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	ULBWP.1.1		
EPRE ratio of PSS to SSS	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	0		
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					

EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} Note 2	dBm / 15kHz	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	-102		
	dBm/SCS	Conf 1, 2, 4, 5, 7,8	-102		
		Conf 3, 6, 9	-99		
$\hat{E}_s / N_{oc}$	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16
$\hat{E}_s / I_{ot}$ Note 3	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16
SS-RSRP Note 3	dBm/SCS	Conf 1, 2, 4, 5, 7,8	-86	-86	-86
		Conf 3, 6, 9	-83	-83	-83
I_o Note 3	dBm/ 9.36 MHz	Conf 1, 2, 4, 5, 7,8	-57.9	-57.9	-57.9
	dBm/ 38.16 MHz	Conf 3, 6, 9	-51.8	-51.8	-51.8
Propagation Condition		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	AWGN		
Antenna configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	1 x 2		
SUL RSRP threshold (<i>rsrp-ThresholdSSB-SUL</i>)	dBm	Conf 1,2,3,4,5,6	-75		
		Conf 7,8,9	-72		
NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.					
NOTE 3: $\hat{E}_s / I_{ot}$, I_o , and SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
NOTE 4: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.					
NOTE 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.					
NOTE 6: $N_{RB,C}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.					

A.4.5.4.1.2 Test Requirements

The UE shall be ready to start transmission on the supplementary uplink carrier on SCell within 20ms from the start of T2.

The UE shall stop the transmission on the supplementary uplink carrier on SCell within 20ms from the start of T3.

All of the above test requirements shall be fulfilled in order for the observed UE UL carrier configuration delay and UE UL carrier release delay to be counted as correct. The rate of correct observed UE UL carrier configuration delay and UE UL carrier release delay during repeated tests shall be at least 90%.

A.4.5.5 Beam Failure Detection and Link recovery procedures

A.4.5.5.1 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in non-DRX mode

A.4.5.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.1.1-1, A.4.5.5.1.1-2, A.4.5.5.1.1-3 and A.4.5.5.1.1-4 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.1.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.4.5.5.1.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.4.5.5.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.5.1.1-2: General test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Value	Comment
		Test 1	
Active E-UTRA PCell		Cell 1	
E-UTRA RF Channel Number		1	

Active PSCell			Cell 2	
RF Channel Number			2	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BWchannel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET	Config 1, 4		CR.1.1 FDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
Dedicated CORESET Reference	Config 1, 4		CCR.1.1 FDD	
	Config 2, 5		CCR.1.1 TDD	
	Config 3, 6		CCR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB.3 FR1	
	Config 2, 5		SSB.3 FR1	
	Config 3, 6		SSB.4 FR1	
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1	
	Config 3, 6		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz	
	Config 3, 6		30 KHz	
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.2-1	
	Config 3, 6		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average	dB	0	

		SSS RE energy			
		Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
		DMRS precoder granularity		REG bundle size	
		REG bundle size		6	
DRX			OFF		
Gap pattern ID			gp0		
gapOffset			0		
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).	
rsrp-ThresholdSSB	Config 1, 2, 4, 5	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$	
	Config 3, 6		-95		
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS	
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17	
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17	
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD		
	Config 2, 5		CSI-RS.1.1 TDD		
	Config 3, 6		CSI-RS.2.1 TDD		
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD		
	Config 2, 5		TRS.1.1 TDD		
	Config 3, 6		TRS.1.2 TDD		
SSB Index assigned as RLM RS			0,1		
T310 timer		ms	1000		
N310			2		
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1	
T2		s	0.37		
T3		s	0.24		
T4		s	0		
T5		s	0.17		
D1		s	0.14		
Note 1: All configurations are assigned to the UE prior to the start of time period T1.					
Note 2: UE-specific PDCCH is not transmitted after T1 starts.					
Note 3: E-UTRAN is in non-DRX mode under test.					

Table A.4.5.1.1-3: Cell specific test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5

EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1, 4	dB	5	-3	-12	-12	-12
	Config 2, 5		5	-3	-12	-12	-12
	Config 3, 6		5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1, 4	dB	-10	-10	10	10	10
	Config 2, 5		-10	-10	10	10	10
	Config 3, 6		-10	-10	10	10	10
SSB_RP of set q_1	Config 1, 4	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2, 5		-108	-108	-88	-88	-88
	Config 3, 6		-105	-105	-85	-85	-85
N_{oc}	Config 1, 4	dBm/15 KHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.							
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.							

Table A.4.5.5.1.1-4: Void

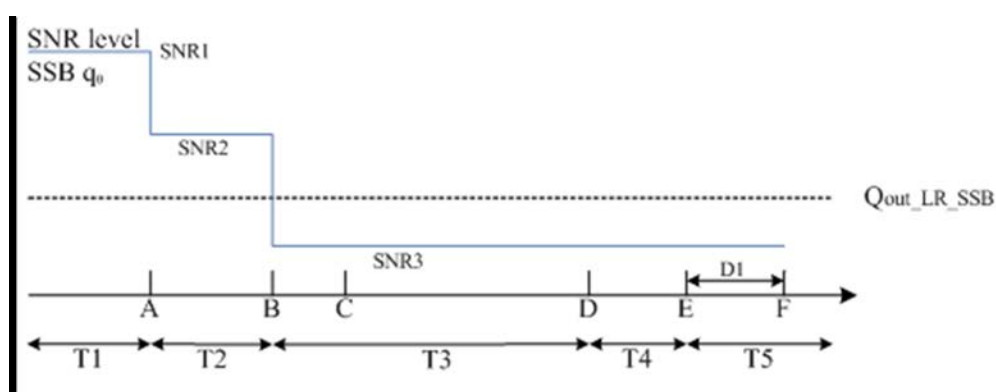


Figure A.4.5.5.1.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

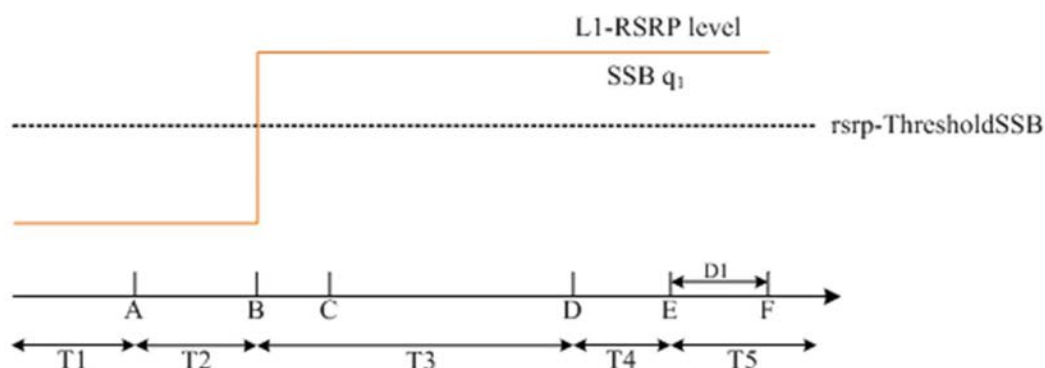


Figure A.4.5.5.1.1-2: L1-RSRP level variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.4.5.5.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 120 + 20$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.2 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in DRX mode

A.4.5.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.2.1-1, A.4.5.5.2.1-2, A.4.5.5.2.1-3, A.4.5.5.2.1-4 and A.4.5.5.2.1-5 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.2.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.4.5.5.2.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e.

UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.4.5.5.2.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.5.2.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active E-UTRA PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number			2	
Duplex mode	Config 1, 4	MHz	FDD	
	Config 2, 3, 5, 6		TDD	
BWchannel	Config 1, 4		10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference	Config 1, 4		CR.1.1 FDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD	
	Config 2, 5		CCR.1.1 TDD	
	Config 3, 6		CCR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB.3 FR1	
	Config 2, 5		SSB.3 FR1	
	Config 3, 6		SSB.4 FR1	
SMTTC Configuration	Config 1, 2, 4, 5		SMTTC.1	
	Config 3, 6		SMTTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz	
	Config 3, 6		30 KHz	
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.2-1	

	Config 3, 6		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
rminSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2, 4, 5	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD	
	Config 2, 5		CSI-RS.1.1 TDD	
	Config 3, 6		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0,1	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	5.17	
T3		s	3.24	
T4		s	0	
T5		s	1.97	
D1		s	1.94	

Note 1: All configurations are assigned to the UE prior to the start of time period T1.

Note 2: UE-specific PDCCH is not transmitted after T1 starts.

Note 3: E-UTRAN is in non-DRX mode under test.

Table A.4.5.5.2.1-3: Cell specific test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1, 4	dB	5	-3	-12	-12	-12
	Config 2, 5		5	-3	-12	-12	-12
	Config 3, 6		5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1, 4	dB	-10	-10	10	10	10
	Config 2, 5		-10	-10	10	10	10
	Config 3, 6		-10	-10	10	10	10
SSB_RP of set q_1	Config 1, 4	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2, 5		-108	-108	-88	-88	-88
	Config 3, 6		-105	-105	-85	-85	-85
N_{oc}	Config 1, 4	dBm/15 KHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Void						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.						
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.						

Table A.4.5.5.2.1-4: Void

Table A.4.5.5.2.1-5: Void

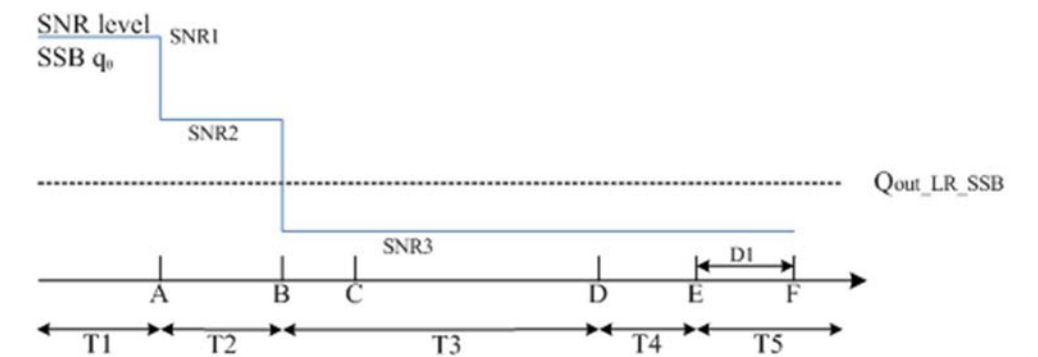


Figure A.4.5.5.2.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in DRX mode

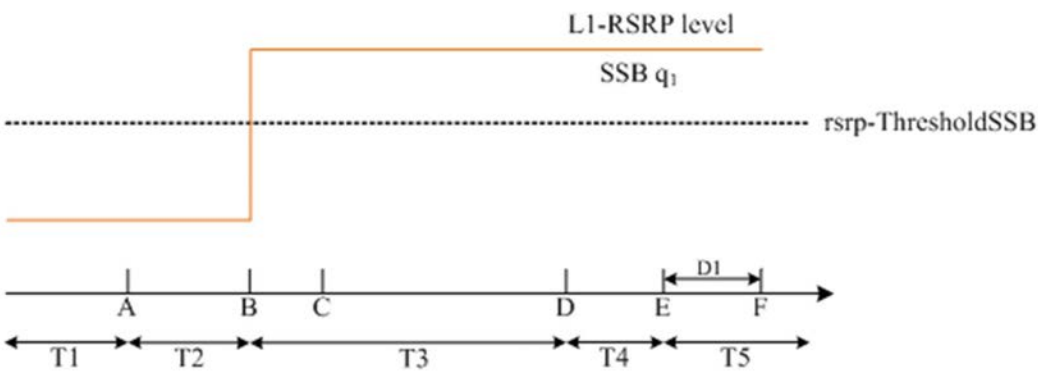


Figure A.4.5.5.2.1-2: L1-RSRP level variation for SSB-based beam failure detection and link recovery testing in DRX mode

A.4.5.5.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 1920 + 20$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.3 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.4.5.5.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.3.1-1, A.4.5.5.3.1-2, and A.4.5.5.3.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.3.1-1 shows the variation of the downlink SNR of the PSCell and the SNR of the CSI-RS in set q_0 in the active PSCell to emulate CSI-RS based beam failure. Figure A.4.5.5.3.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.4.5.5.3.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.5.3.1-2: General test parameters for FR1 PSCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number			2	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BWchannel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	

UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	A.3.1.2
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD	A.3.1.3
	Config 2, 5		CCR.1.1 TDD	
	Config 3, 6		CCR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB. 3 FR1	A.3.10
	Config 2, 5		SSB. 3 FR1	
	Config 3, 6		SSB. 4 FR1	
SMTTC Configuration	Config 1, 2, 4, 5		SMTTC.1	A.3.11
	Config 3, 6		SMTTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz	
	Config 3, 6		30 KHz	
PRACH Configuration	Config 1, 2, 4, 5		FR1 PRACH configuration 4	A.3.8.2
	Config 3, 6		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-	Config 1, 2, 4, 5	dBm/SCS	-98	Threshold used

ThresholdCSI-RS	Config 3, 6	kHz	-95	for $Q_{in_LR_CSI-RS}$
powerControlOffsetSS			db0	Used for deriving rsrp- ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for q_0 and q_1	Config 1, 4		CSI-RS.1.2 FDD	A.3.14
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD	A.3.14
	Config 2, 5		CSI-RS.1.1 TDD	
	Config 3, 6		CSI-RS.2.1 TDD	
TRS configuration	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
csi-RS-Index assigned as RLM RS	Config 1, 4		CSI-RS.1.2 FDD	A.3.14
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	
T5		s	0.08	
D1		s	0.05	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.4.5.5.3.1-3: Cell specific test parameters for FR1 PSCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1, 4	dB	5	-3	-12	-12	-12
	Config 2, 5		5	-3	-12	-12	-12
	Config 3, 6		5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1, 4	dB	-10	-10	10	10	10
	Config 2, 5		-10	-10	10	10	10
	Config 3, 6		-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1, 4	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2, 5		-108	-108	-88	-88	-88
	Config 3, 6		-105	-105	-85	-85	-85

N_{oc}	Config 1, 4	dBm/15 KHz	-98
	Config 2, 5		-98
	Config 3, 6		-98
Propagation condition			TDL-C 300ns 100Hz
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. Note 4: Void Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS. Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1. Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.			

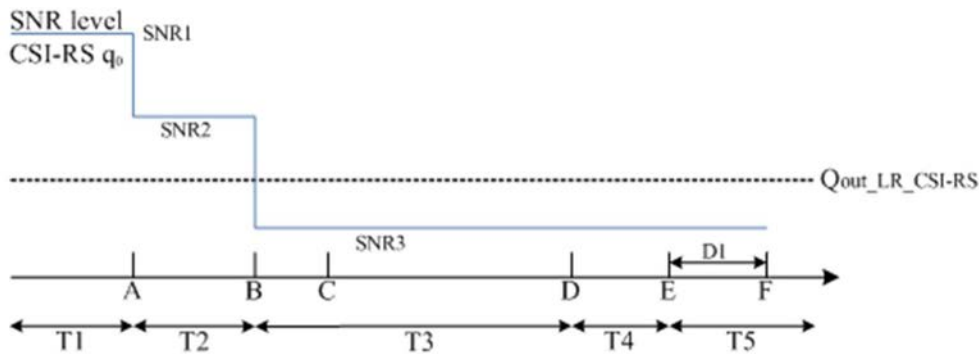


Figure A.4.5.5.3.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

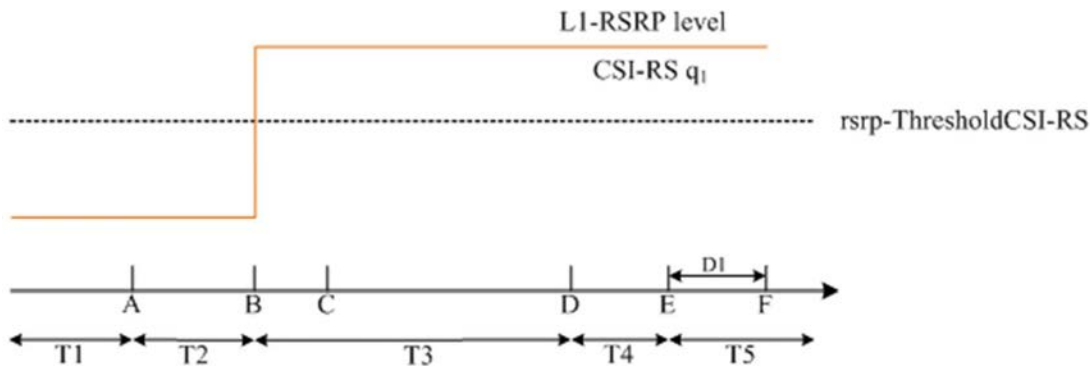


Figure A.4.5.5.3.1-2: L1-RSRP level variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

A.4.5.5.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 30+20$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.4 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with CSI-RS-based BFD and LR in DRX mode

A.4.5.5.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.4.1-1, A.4.5.5.4.1-2, A.4.5.5.4.1-3, and A.4.5.5.4.1-4 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.4.1-1 shows the variation of the downlink SNR of the PSCell and the SNR of the CSI-RS in set q_0 in the active PSCell to emulate CSI-RS based beam failure. Figure A.4.5.5.4.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.4.5.5.4.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.5.4.1-2: General test parameters for FR1 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number			2	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BWchannel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	A.3.1.2
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD	A.3.1.3
	Config 2, 5		CCR.1.1 TDD	
	Config 3, 6		CCR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB. 3 FR1	A.3.10
	Config 2, 5		SSB. 3 FR1	
	Config 3, 6		SSB. 4 FR1	
SMTC Configuration	Config 1, 2, 4, 5		SMTC.1	A.3.11
	Config 3, 6		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15 KHz	
	Config 3, 6		30 KHz	
PRACH Configuration	Config 1, 2, 4, 5		FR1 PRACH configuration 4	A.3.8.2
	Config 3, 6		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control		2	

	OFDM symbols			
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdCSI-RS	Config 1, 2, 4, 5	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_CSI-RS}$
	Config 3, 6		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for q_0 and q_1	Config 1, 4		CSI-RS.1.2 FDD	A.3.14
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD	A.3.14
	Config 2, 5		CSI-RS.1.1 TDD	
	Config 3, 6		CSI-RS.2.1 TDD	
TRS configuration	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
csi-RS-Index assigned as RLM RS	Config 1, 4		CSI-RS.1.2 FDD	A.3.14

	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.94	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.4.5.5.4.1-3: Cell specific test parameters for FR1 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1, 4	dB	5	-3	-12	-12	-12
	Config 2, 5		5	-3	-12	-12	-12
	Config 3, 6		5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1, 4	dB	-10	-10	10	10	10
	Config 2, 5		-10	-10	10	10	10
	Config 3, 6		-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1, 4	dBm/SCS kHz	-108	-108	-88	-88	-88
	Config 2, 5		-108	-108	-88	-88	-88
	Config 3, 6		-105	-105	-85	-85	-85
N_{oc}	Config 1, 4	dBm/15 KHz	-98				
	Config 2, 5		-98				
	Config 3, 6		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

Table A.4.5.5.4.1-4: Void

Table A.4.5.5.4.1-5: Void

Table A.4.5.5.4.1-6: Void

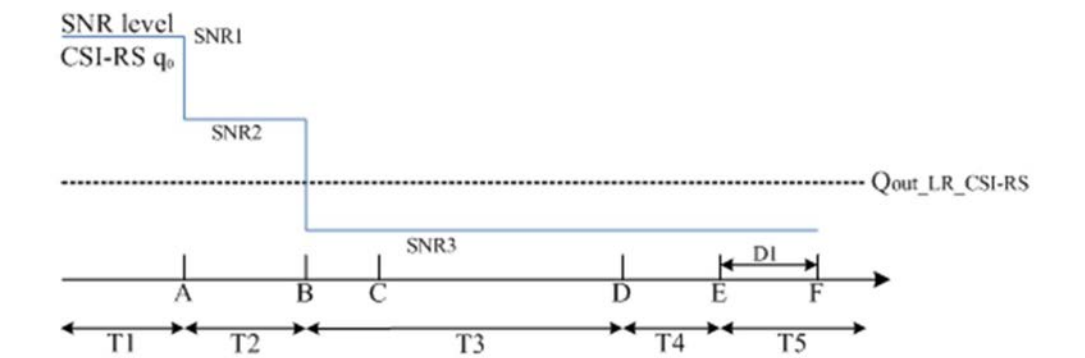


Figure A.4.5.5.4.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

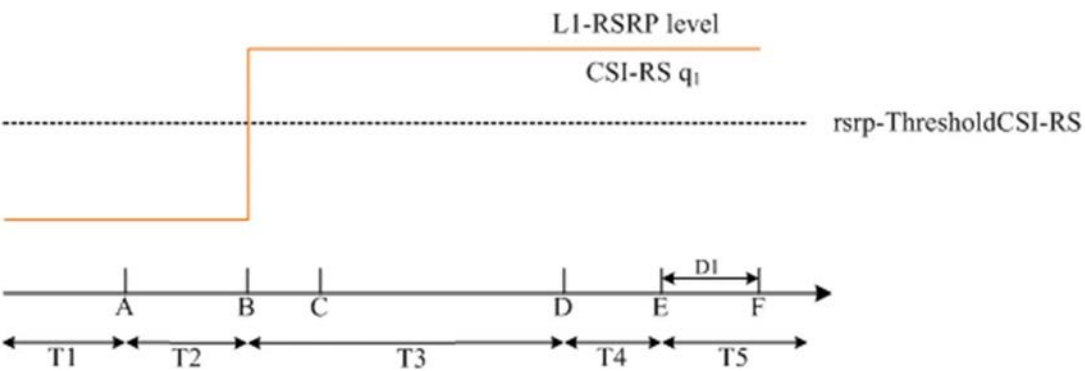


Figure A.4.5.5.4.1-2: L1-RSRP level variation for CSI-RS based beam failure detection and link recovery testing in DRX mode

A.4.5.5.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 1920 + 20$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.5 EN-DC Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode

A.4.5.5.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving SCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell without *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.5.1-1, A.4.5.5.5.1-2, and A.4.5.5.5.1-3 below. There are three cells, cell 1 is the E-UTRAN PCell, cell 2 is the PCell and cell 3 is the SCell, in the test. UE is not provided by *schedulingRequestID-BFR-SCell-r16*, i.e., no configuration for PUCCH transmission resources, and UE shall perform the random access procedure to recover the beam failure. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.5.1-1 shows the SNR of the CSI-RS in set q_0 in the active SCell to emulate beam failure. Figure A.4.5.5.5.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1, cell 2 and cell3. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.4.5.5.5.1-1: Supported test configurations for FR1 PCell and SCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.5.1-2: General test parameters for FR1 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number for PSCell			2	
Active SCell			Cell 3	
RF Channel Number for SCell			3	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BW channel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	A.3.1.2
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB.1 FR1	A.3.10
	Config 2, 5		SSB.1 FR1	
	Config 3, 6		SSB.2 FR1	
SMTC Configuration	Config 1, 2, 3, 4, 5, 6	kHz	SMTC.1	A.3.11
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15	
	Config 3, 6		30	
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.2-1	
	Config 3, 6		Table A.3.8.2.2-1	
csi-RS-Index assigned as beam failure detection RS in set q_0 in activated SCell			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	

	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
schedulingRequestID-BFR-SCell-r16			absent	When the field is absent, the random access procedure will be triggered for SCell BFR
SSB Index assigned as CBD RS (q1) in activated SCell			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdBFR	Config 1, 2, 4, 5	dBm/SCS	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for q_0 in activated SCell	Config 1, 4		CSI-RS.1.2 FDD	A.3.14
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD	A.3.14
	Config 2, 5		CSI-RS.1.1 TDD	
	Config 3, 6		CSI-RS.2.1 TDD	
TRS configuration	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
csi-RS-Index assigned as RLM RS in PSCell	Config 1, 4		CSI-RS.1.2 FDD	A.3.14
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	
T5		s	0.17	
D1		s	0.13	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.4.5.5.1-3: Cell specific test parameters for FR1 PSCell and SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Cell2	Test 1 Cell3				
			T1 to T5	T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1, 4	dB	5	5	-3	-12	-12	-12
	Config 2, 5		5	5	-3	-12	-12	-12
	Config 3, 6		5	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1, 4	dB	-10	-10	-10	10	10	10
	Config 2, 5		-10	-10	-10	10	10	10
	Config 3, 6		-10	-10	-10	10	10	10
SSB_RP of set q_1	Config 1, 4	dBm/SCS kHz	-108	-108	-108	-88	-88	-88
	Config 2, 5		-108	-108	-108	-88	-88	-88
	Config 3, 6		-105	-105	-105	-85	-85	-85
N_{oc}	Config 1, 4	dBm/15 kHz	-98	-98				
	Config 2, 5		-98	-98				
	Config 3, 6		-98	-98				
Propagation condition			TDL-C 300ns 100Hz	TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.								
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.								
Note 4: Void								
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.								
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.								
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.								
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.								
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause [A.3.6].								

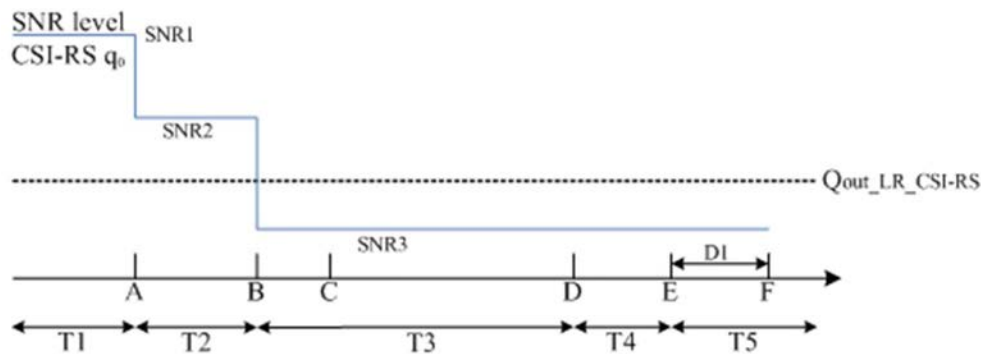


Figure A.4.5.5.1-1: SNR variation for beam failure detection and link recovery testing for SCell in non-DRX mode

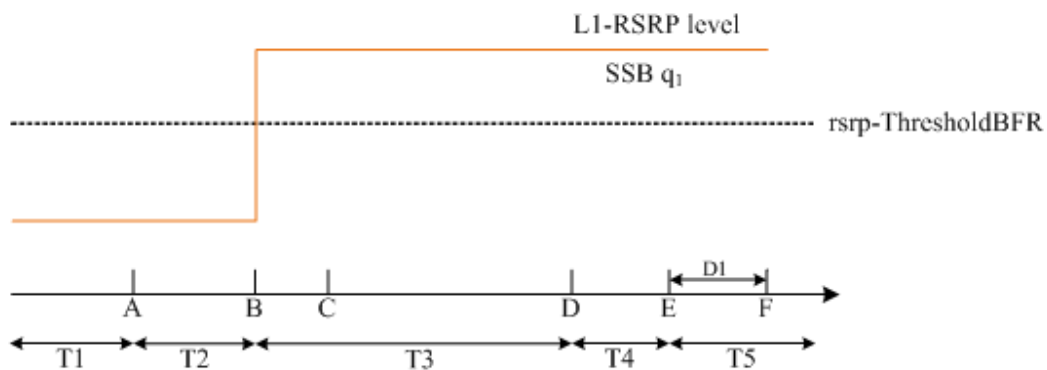


Figure A.4.5.5.1-2: L1-RSRP level variation for beam failure detection and link recovery testing for SCell in non-DRX mode

A.4.5.5.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 2.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 120 + 10$ ms after the start of T5, the UE shall transmit preamble for UL-SCH resource application, followed by MAC-CE on the assigned uplink resources containing a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble earlier than time point B.

During T5, the System Simulator shall transmit a Random Access Response to UE after the System Simulator receives the preamble from UE. The UE shall transmit the msg.3 containing candidate beam set q_1 for SCell BFR if UE receives the Random Access Response.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.6 EN-DC Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in DRX mode

A.4.5.5.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS based beam failure in the set q_0 configured for a serving SCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell without *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.6.1-1, A.4.5.5.6.1-2, and A.4.5.5.6.1-3 below. There are three cells, cell 1 is the E-UTRAN PCell, cell 2 is the PSCell and cell 3 is the SCell, in the test. UE is not provided by *schedulingRequestID-BFR-SCell-r16*, i.e., no configuration for PUCCH transmission resources, and UE shall perform the random access procedure to recover the beam failure. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.6.1-1 shows the SNR of the CSI-RS in set q_0 in the active SCell to emulate beam failure. Figure A.4.5.5.6.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1, cell 2 and cell 3. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in SCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.4.5.5.6.1-1: Supported test configurations for FR1 PCell and SCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.5.6.1-2: General test parameters for FR1 SCell for beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number for PSCell			2	
Active SCell			Cell 3	
RF Channel Number for SCell			3	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BWchannel	Config 1, 4		10: NRB,c = 52	

	Config 2, 5	MHz	10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	A.3.1.2
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB.1 FR1	A.3.10
	Config 2, 5		SSB.1 FR1	
	Config 3, 6		SSB.2 FR1	
SMTC Configuration	Config 1, 2, 3, 4, 5, 6		SMTC.1	A.3.11
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5	kHz	15	
	Config 3, 6		30	
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.2-1	
	Config 3, 6		Table A.3.8.2.2-1	
csi-RS-Index assigned as beam failure detection RS in set q_0 in activated SCell			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	

		DMRS precoder granularity		REG bundle size	
		REG bundle size		6	
DRX				DRX.7	A.3.3.7
Gap pattern ID				N.A.	
schedulingRequestID-BFR-SCell-r16				absent	When the field is absent, the random access procedure will be triggered for SCell BFR
SSB Index assigned as CBD RS (q1) in activated SCell				1	
rlmInSyncOutOfSyncThreshold				absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdBFR	Config 1, 2, 4, 5	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$	
	Config 3, 6		-95		
powerControlOffsetSS				db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount				n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer				pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for q_0 in activated SCell	Config 1, 4		CSI-RS.1.2 FDD	A.3.14	
	Config 2, 5		CSI-RS.1.2 TDD		
	Config 3, 6		CSI-RS.2.2 TDD		
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD	A.3.14	
	Config 2, 5		CSI-RS.1.1 TDD		
	Config 3, 6		CSI-RS.2.1 TDD		
TRS configuration	Config 1, 4		TRS.1.1 FDD		
	Config 2, 5		TRS.1.1 TDD		
	Config 3, 6		TRS.1.2 TDD		
csi-RS-Index assigned as RLM RS in PSCell	Config 1, 4		CSI-RS.1.2 FDD	A.3.14	
	Config 2, 5		CSI-RS.1.2 TDD		
	Config 3, 6		CSI-RS.2.2 TDD		
T310 Timer		ms	1000		
N310			2		
T1		s	1		During this time the the UE shall be fully synchronized to cell 1
T2		s	8.37		

T3	s	6.44	
T4	s	0	
T5	s	1.97	
D1	s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.4.5.6.1-3: Cell specific test parameters for FR1 SCell for beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Cell2	Test 1 Cell3				
			T1 to T5	T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1, 4	dB	5	5	-3	-12	-12	-12
	Config 2, 5		5	5	-3	-12	-12	-12
	Config 3, 6		5	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1, 4	dB	-10	-10	-10	10	10	10
	Config 2, 5		-10	-10	-10	10	10	10
	Config 3, 6		-10	-10	-10	10	10	10
SSB_RP of set q_1	Config 1, 4	dBm/SCS kHz	-108	-108	-108	-88	-88	-88
	Config 2, 5		-108	-108	-108	-88	-88	-88
	Config 3, 6		-105	-105	-105	-85	-85	-85
N_{oc}	Config 1, 4	dBm/ 15 kHz	-98	-98				
	Config 2, 5		-98	-98				
	Config 3, 6		-98	-98				
Propagation condition			TDL-C 300ns 100Hz	TDL-C 300ns 100Hz				

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Void
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
- Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
- Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

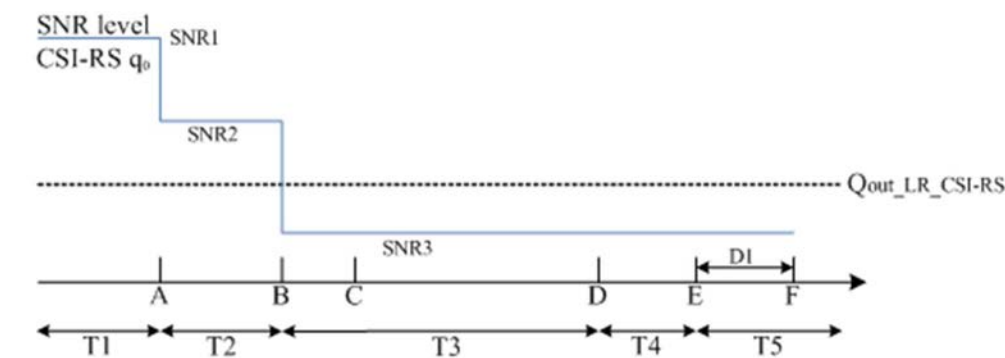


Figure A.4.5.5.6.1-1: SNR variation for beam failure detection and LR testing for SCell in DRX mode

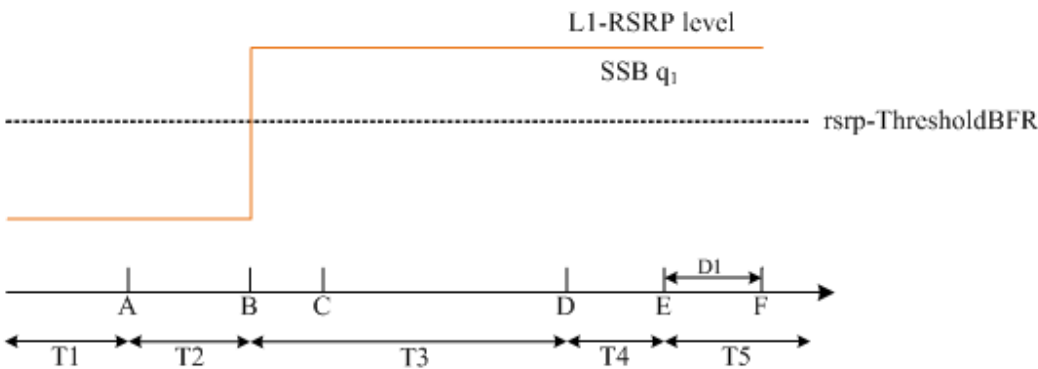


Figure A.4.5.5.6.1-2: L1-RSRP level variation for beam failure detection and link recovery testing for SCell in DRX mode

A.4.5.5.6.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 2.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 120 + 10$ ms after the start of T5, the UE shall transmit preamble for UL-SCH resource application, followed by MAC-CE on the assigned uplink resources containing a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble earlier than time point B.

During T5, the System Simulator shall transmit a Random Access Response to UE after the System Simulator receives the preamble from UE. The UE shall transmit the msg.3 containing candidate beam set q_1 for SCell BFR if UE receives the Random Access Response.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.7 EN-DC TRP specific Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode

A.4.5.5.7.1 Test Purpose and Environment

The test scenario is EN-DC and NR configured in the test contains two TRPs (i.e., TRP0 and TRP1). Each TRP is configured with different SSB for beam failure detection and candidate beam detection. SSB is configured as BFD-RS and CBD-RS.

The purpose of this test is to verify that the UE properly detects the TRP specific SSB-based beam failure in the set $(q0,0)$ for TRP0 configured for a serving PCell and that the UE performs correct SSB-based link recovery based on beam candidate set $(q1,0)$. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PCell with *schedulingRequestID-BFR-r17* configured, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.4.5.5.7.1-1, A.4.5.5.7.1-2, A.4.5.5.7.1-3 and A.4.5.5.7.1-4 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the active PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.7.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set $q0$ in the active PCell to emulate SSB based beam failure. Figure A.4.5.5.7.1-2 shows the variation of the downlink L1-RSRP of the SSB in set $q1$ of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.4.5.5.7.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.5.7.1-2: General test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value Test 1	Comment
Active E-UTRA PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number for PSCell			2	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BW channel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	A.3.1.2
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
SSB Configuration for TRP0	Config 1, 4		SSB.3 FR1	A.3.10
	Config 2, 5		SSB.3 FR1	
	Config 3, 6		SSB.4 FR1	
SSB Configuration for TRP1	Config 1, 4		SSB.7 FR1	A.3.10
	Config 2, 5		SSB.7 FR1	
	Config 3, 6		SSB.8 FR1	
SMTC Configuration	Config 1, 2, 3, 4, 5, 6	kHz	SMTC.1	A.3.11
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15	
	Config 3, 6		30	
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.2-1	
	Config 3, 6		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q0,0)			0	
SSB Index assigned as CBD RS (q1,0)			1	
SSB Index assigned as BFD RS (q0,1)			2	
SSB Index assigned as CBD RS (q1,1)			3	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	

	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			gp0	
gapOffset			0	
schedulingRequestID-BFR- r17			Configured	
Periodicity of PUCCH for SR configuration for BFR on PSCell	Config 1, 2, 4, 5	slot	5	5ms
	Config 3, 6		10	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2, 4, 5	dBm/SCS	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
SSB Index assigned as RLM RS			0,1,2,3	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.37	
T3		s	0.24	
T4		s	0	
T5		s	0.17	
D1		s	0.13	
Note 1:	All configurations are assigned to the UE prior to the start of time period T1.			
Note 2:	UE-specific PDCCH is not transmitted after T1 starts.			
Note 3:	E-UTRAN is in non-DRX mode under test.			

Table A.4.5.5.7.1-3: Cell specific test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					

EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_SSB of set q0,0	Config 1, 4	dB	5	-3	-12	-12	-12	
	Config 2, 5		5	-3	-12	-12	-12	
	Config 3, 6		5	-3	-12	-12	-12	
SNR_SSB of set q0,1	Config 1,4	dB	5	5	5	5	5	
	Config 2, 5		5	5	5	5	5	
	Config 3, 6		5	5	5	5	5	
SNR_SSB of set q1,0	Config 1, 4	dB	-10	-10	10	10	10	
	Config 2, 5		-10	-10	10	10	10	
	Config 3, 6		-10	-10	10	10	10	
SNR_SSB of set q1,1	Config 1, 4	dB	-10	-10	10	10	10	
	Config 2, 5		-10	-10	10	10	10	
	Config 3, 6		-10	-10	10	10	10	
SSB_RP of set q1,0	Config 1, 4	dBm/SCS kHz	-108	-108	-88	-88	-88	
	Config 2, 5		-108	-108	-88	-88	-88	
	Config 3, 6		-105	-105	-85	-85	-85	
SSB_RP of set q1,1	Config 1, 4	dBm/SCS kHz	-108	-108	-88	-88	-88	
	Config 2, 5		-108	-108	-88	-88	-88	
	Config 3, 6		-105	-105	-85	-85	-85	
N_{oc}	Config 1, 4	dBm/15 KHz	-98					
	Config 2, 5		-98					
	Config 3, 6		-98					
Propagation condition			TDL-C 300ns 100Hz					
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.							
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.							
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.							

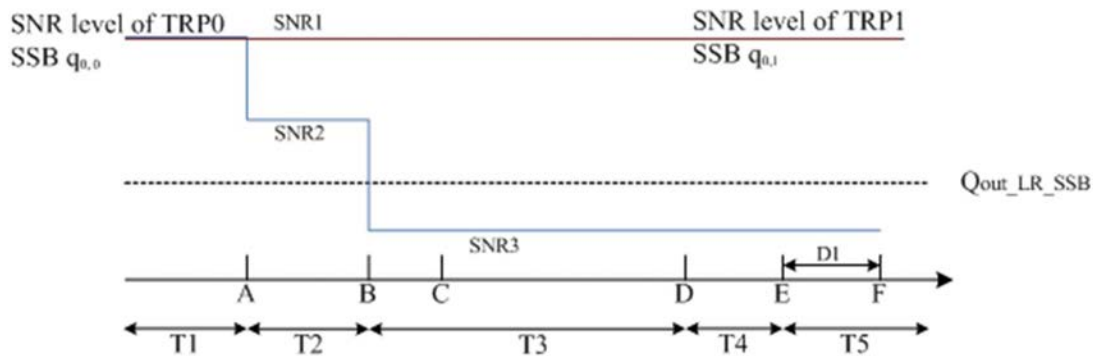


Figure A.4.5.5.7.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

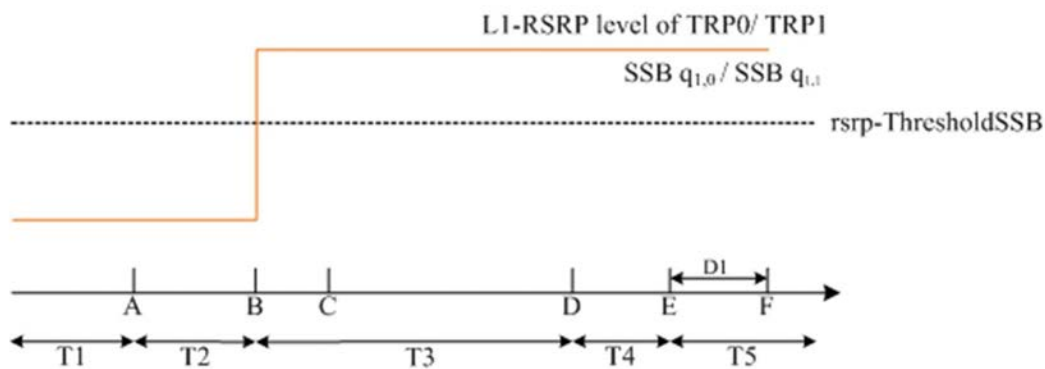


Figure A.4.5.5.7.1-2: L1-RSRP level variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.4.5.5.7.2 Test Requirements

Test requirements are applied to TRP specific report respectively on $(q0,0)$, $(q1,0)$ for TRP 0 and $(q0,1)$, $(q1,1)$ for TRP 1 respectively as Figure A.4.5.5.7.1-1.

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set $q_{1,0}$.

No later than time point F occurring no later than $D1 = 120 + 10$ ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{1,0}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{1,0}$ earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.5.8 EN-DC TRP specific Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode

A.4.5.5.8.1 Test Purpose and Environment

The test scenario is EN-DC and a NR SCell configured in the test contains two TRPs (i.e., TRP0 and TRP1). Each TRP is configured with different CSI-RS and SSB for beam failure detection and candidate beam detection. CSI-RS is configured as BFD-RS and SSB is configured as CBD-RS.

The purpose of this test is to verify that the UE properly detects the CSI-RS-based beam failure on the TRP using the respective configured BFD set $\bar{q}_{0,0}$ for TRP0. After the BFD is detected for the TRP, the test further verifies whether the UE performs the correct SSB-based link recovery based on the configured beam candidate set $\bar{q}_{1,0}$ for TRP0. In the test two TRPs (TRP0 and TRP1) are provided with schedulingRequestID-BFR-r17. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.18.

Supported test configuration are provided in Table A.4.5.5.8.1-1, general test parameters for FR1 SCell is provided in Table A.4.5.5.8.1-2, and Cell specific test parameter are provided in Table A.4.5.5.8.1-3. There are three cells in the test, cell 1 is the E-UTRAN PCell, cell 2 is the NR PSCell and cell 3 is the NR SCell. CSI report for SCell (cell 3) are transmitted on PSCell (cell 2).

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.4.5.5.8.1-1 shows the SNR of the CSI-RS in set $q_{0,0}$ in the TRP0 to emulate beam failure. Figure A.4.5.5.8.1-2 shows the variation of the downlink L1-RSRP of the SSB in set $q_{1,0}$ and $q_{1,1}$ of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1, cell 2 and cell3. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.4.5.5.8.1-1: Supported test configurations for FR1 PCell and SCell

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.5.8.1-2: General test parameters for FR1 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Value	Comment Same configuration for both TRP wherever applicale
		Test 1	
Active PCell		Cell 1	
E-UTRA RF Channel Number		1	
Active PSCell		Cell 2	
RF Channel Number for PSCell		2	

Active SCell			Cell 3	
RF Channel Number for SCell			3	
Duplex mode	Config 1, 4		FDD	
	Config 2, 3, 5, 6		TDD	
BW channel	Config 1, 4	MHz	10: NRB,c = 52	
	Config 2, 5		10: NRB,c = 52	
	Config 3, 6		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
TDD Configuration	Config 1, 4		Not Applicable	
	Config 2, 5		TDDConf.1.1	
	Config 3, 6		TDDConf.2.1	
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	A.3.1.2
	Config 2, 5		CR.1.1 TDD	
	Config 3, 6		CR.2.1 TDD	
SSB Configuration	Config 1, 4		SSB.1 FR1	A.3.10 Same configuration for both TRP
	Config 2, 5		SSB.1 FR1	
	Config 3, 6		SSB.2 FR1	
SMTC Configuration	Config 1, 2, 3, 4, 5, 6	kHz	SMTC.1	A.3.11, Same configuration for both TRP
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4, 5		15	
	Config 3, 6		30	
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.2-1	
	Config 3, 6		Table A.3.8.2.2-1	
csi-RS-Index assigned as beam failure detection RS in set q_{00} in activated SCell			0	
csi-RS-Index assigned as beam failure detection RS in set q_{01} in activated SCell			2	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	

	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
schedulingRequestID-BFR-r17			Configured, 1-2	
Periodicity of PUCCH for SR configuration for BFR on SCell	Config 1, 2, 4, 5	slot	5	5ms
	Config 3, 6		10	
schedulingRequestID-BFR2-r17			absent	When the field is absent, the random access procedure will be triggered for TRP BFR
Periodicity of PUCCH for SR configuration for BFR on TRP0		Slot	5	
SSB Index assigned as CBD RS (q10) in activated SCell			1	
SSB Index assigned as CBD RS (q11) in activated SCell			3	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2, 4, 5	dBm/SCS	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3, 6		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
BFD-RS (CSI-RS) configuration for q_{00} in activated SCell	Config 1, 4		CSI-RS.1.2 FDD	A.3.14
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
BFD-RS (CSI-RS) configuration for q_{01} in activated SCell	Config 1, 4		CSI-RS.1.7 FDD	A.3.14
	Config 2, 5		CSI-RS.1.6 TDD	
	Config 3, 6		CSI-RS.2.7 TDD	
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD	A.3.14
	Config 2, 5		CSI-RS.1.1 TDD	
	Config 3, 6		CSI-RS.2.1 TDD	
TRS configuration	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
csi-RS-Index assigned as RLM RS in PSCell	Config 1, 4		CSI-RS.1.2 FDD	A.3.14
	Config 2, 5		CSI-RS.1.2 TDD	
	Config 3, 6		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	

T4	s	0	
T5	s	0.17	
D1	s	0.06	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.4.5.8.1-3: Cell specific test parameters for FR1 PSCell and SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Cell2	TRP 0/1 Cell3				
			T1 to T5	T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_{00}	Config 1, 4	dB	5	5	-3	-12	-12	-12
	Config 2, 5		5	5	-3	-12	-12	-12
	Config 3, 6		5	5	-3	-12	-12	-12
SNR_CSI-RS of set q_{01}	Config 1, 4	dB	5	5	5	5	5	5
	Config 2, 5		5	5	5	5	5	5
	Config 3, 6		5	5	5	5	5	5
SNR_SSB of set q_{10}	Config 1, 4	dB	-10	-10	-10	10	10	10
	Config 2, 5		-10	-10	-10	10	10	10
	Config 3, 6		-10	-10	-10	10	10	10
SNR_SSB of set q_{11}	Config 1, 4	dB	-10	-10	-10	10	10	10
	Config 2, 5		-10	-10	-10	10	10	10
	Config 3, 6		-10	-10	-10	10	10	10
SSB_RP of set q_{10}	Config 1, 4	dBm/SCS kHz	-108	-108	-108	-88	-88	-88
	Config 2, 5		-108	-108	-108	-88	-88	-88
	Config 3, 6		-105	-105	-105	-85	-85	-85
SSB_RP of set q_{11}	Config 1, 4	dBm/SCS kHz	-108	-108	-108	-88	-88	-88
	Config 2, 5		-108	-108	-108	-88	-88	-88
	Config 3, 6		-105	-105	-105	-85	-85	-85
N_{oc}	Config 1, 4	dBm/15 kHz	-98	-98				
	Config 2, 5		-98	-98				
	Config 3, 6		-98	-98				
Propagation condition			TDL-C 300ns 100Hz	TDL-C 300ns 100Hz				

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Void
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
- Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
- Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause [A.3.6].

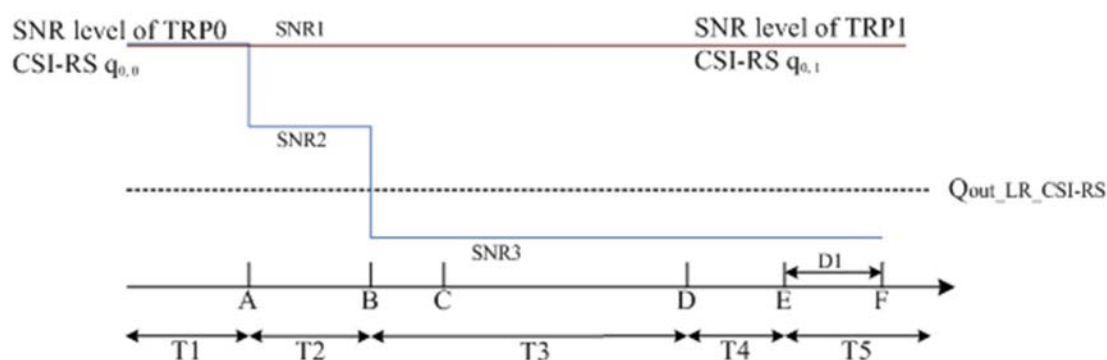


Figure A.4.5.5.8.1-1: SNR variation for beam failure detection and link recovery testing for TRP0 in non-DRX mode

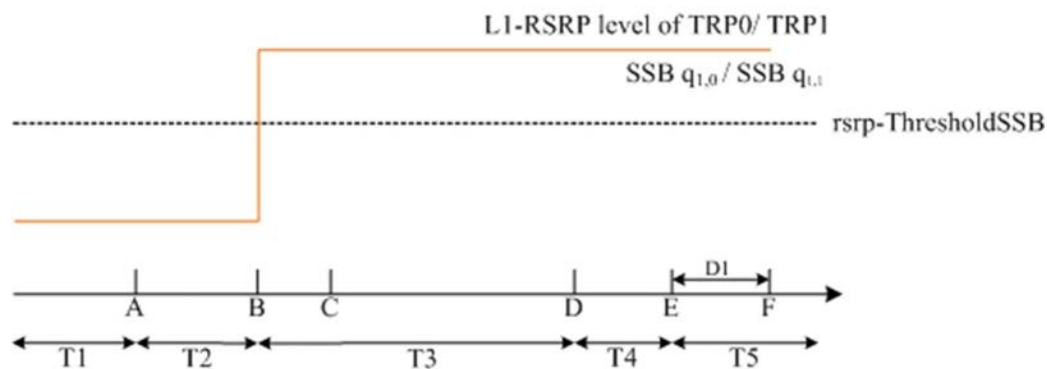


Figure A.4.5.5.8.1-2: L1-RSRP level variation for beam failure detection and link recovery testing for TRP 0 in non-DRX mode

A.4.5.5.8.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 2.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure on TRP0 and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set $q_{1,0}$.

For TRP0, no later than time point F occurring no later than $D1 = 60$ ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{1,0}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{1,0}$ earlier than time point B.

Test is concluded once the test equipment has received the BFR MAC CE from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.6 Active BWP switch

A.4.5.6.1 DCI-based and Timer-based Active BWP Switch

A.4.5.6.1.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC

A.4.5.6.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in TS38.133 clause 8.6, and interruption requirement for E-UTRA victim cell defined in TS36.133 clause 7.32.2.7. Supported test configurations are shown in Table A.4.5.6.1.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.4.5.6.1.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.4.5.6.1.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PSCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after DL slot ($i + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after DL slot ($i + T_{BWPswitchDelay}$).

The starting time of PCell(Cell 1) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell(Cell 2).

During T3,

The time period T3 starts from the slot # j , where j is the beginning slot of the DL subframe immediately after the *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($j + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell at latest at the beginning of the DL slot right after DL slot ($j + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after DL slot ($j + T_{BWPswitchDelay}$).

The starting time of PCell(Cell 1) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PSCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to E-UTRA PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of PSCell, respectively.

Table A.4.5.6.1.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	
Note 2: A UE which fulfils the requirements in test case A.4.5.6.1.2 can skip the test cases in A.4.5.6.1.1.	

Table A.4.5.6.1.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
<i>bwp-InactivityTimer</i>	ms	[200]	

PDCCH and PDSCH maximum number of HARQ transmission		1	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μ s	3	Synchronous EN-DC
T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

Table A.4.5.6.1.1.1-3.: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
BW _{channel}	Config 1,4		10 MHz: N _{RB,c} = 52
	Config 2,5		10 MHz: N _{RB,c} = 52
	Config 3,6		40 MHz: N _{RB,c} = 106
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,4		DLBWP.0.2 ^{Note 4}
	Config 2,5		
	Config 3,6		
Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.1 ^{Note 4}
	Config 2,5		
	Config 3,6		
Active DL BWP-2 Configuration	Config 1,4		DLBWP.1.3 ^{Note 4}
	Config 2,5		
	Config 3,6		
Initial UL BWP Configuration	Config 1,4		ULBWP.0.2 ^{Note 4}
	Config 2,5		
	Config 3,6		
Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.1 ^{Note 4}
	Config 2,5		
	Config 3,6		
Active UL BWP-2 Configuration	Config 1,4		N/A
	Config 2,5		ULBWP.1.3 ^{Note 4}
	Config 3,6		ULBWP.1.3 ^{Note 4}
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.2 FDD
	Config 2,5		CCR.1.2 TDD
	Config 3,6		CCR.2.4 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD

	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} ^{Note 2}	Config 1,2,4,5	dBm/SCS	[-104]
	Config 3,6		[-101]
N_{oc} ^{Note 2}		dBm/15kHz	-104
SS-RSRP ^{Note 3}	Config 1,2,4,5	dBm/SCS	[-87]
	Config 3,6		[-90]
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I_o ^{Note 3}	Config 1,2,4,5	dBm/9.36MHz	[-59]
	Config 3,6	dBm/38.16MHz	[-61.9]
Propagation Condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

A.4.5.6.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell from the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK for PSCell from the first UL slot that occurs after the beginning of DL slot $(j + T_{BWPswitchDelay} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start time of PCell interruption during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start time of PCell interruption of during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in TS36.133 Clause 7.32.2.7.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot $(i + T_{BWPswitchDelay} + k1)$, $(j + T_{BWPswitchDelay} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.4.5.6.1.2 E-UTRAN – NR PSCell FR1 DL active BWP switch with FR1 SCell in non-DRX in synchronous EN-DC

A.4.5.6.1.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirements for NR victim cell defined in clause 8.2.1.2.7 and interruption requirement for E-UTRA victim cell defined in clause 7.32.2.7 of TS 36.133 [15]. Supported test configurations for LTE PCell and NR PSCell are shown in Table A.4.5.6.1.2.1-1. Supported test configurations for NR SCell are shown in table A.4.5.6.1.2.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

The test scenario comprises of one E-UTRA PCell (Cell 1), one PSCell (Cell 2) and one SCell (Cell 3) as given in Table A.4.5.6.1.2.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of PSCell and SCell are specified in Table A.4.5.6.1.2.1-3 and Table A.4.5.6.1.2.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on E-UTRA PCell (Cell 1) and PSCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 3) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 3 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 3 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PSCell, BWP-0 in Cell 2 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PSCell.
- UE is configured with a *bwp-InactivityTimer* timer value for SCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for SCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in SCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of SCell's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PSCell no later than on the first UL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on SCell's BWP-2 starting from the first DL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay}$).

E-UTRA PCell(Cell 1) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.

PSCell(Cell 2) interruption due to BWP switch on SCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on SCell(Cell 3).

During T3,

The time period T3 starts from the slot # j , where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of SCell's DL slot ($j + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PSCell no later than on the first UL slot that occurs after the beginning of the slot ($j + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on SCell's BWP-1 starting from the first DL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay}$).

E-UTRA PCell(Cell 1) interruption due to BWP switch of SCell shall occur within the BWP switch delay.

PSCell(Cell 2) interruption due to BWP switch of SCell shall occur within the BWP switch delay. The test equipment verifies the DL BWP switch time in SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to E-UTRA PCell and NR PSCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PSCell during BWP switch of SCell, respectively.

Table A.4.5.6.1.2.1-1: DL BWP switch supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	A UE which fulfils the requirements in test case A.4.5.6.1.2 can skip the test cases in A.4.5.6.1.1.
Note 3:	Void
Note 4:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth ($BW_{channel}$) defined in each test configuration

Table A.4.5.6.1.2.1-1A: DL BWP switch supported test configurations for NR SCell

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	A UE which fulfils the requirements in test case A.4.5.6.1.2 can skip the test cases in A.4.5.6.1.1.

Note 3: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration

Table A.4.5.6.1.2.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3	Two NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	
<i>bwp-InactivityTimer</i>	ms	[200]	
PDCCH and PDSCH maximum number of HARQ transmission		1	For PCell, PSCell and SCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	μ s	3	Synchronous EN-DC
Cell3 timing offset to cell2	μ s	3	Synchronous cells
T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

Table A.4.5.6.1.2.1-3: NR Cell specific test parameters for NR PSCell for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
BW_{channel}	Config 1,2,3,4,5,6		Note 7
BW_{occupied}	Config 1,2,4,5	RB	52 ^{Note 5}
	Config 3,6		106 ^{Note 6}
Active BWP ID			0
Initial DL BWP Configuration	Config 1,2,3,4,5,6		DLBWP.0.2
Active DL BWP-0 Configuration	Config 1,2,3,4,5,6		DLBWP.0.2
Active DL BWP-1 Configuration	Config 1,2,3,4,5,6		N.A.
Active DL BWP-2 Configuration	Config 1,2,3,4,5,6		N.A.
Initial UL BWP Configuration	Config 1,2,3,4,5,6		ULBWP.0.2
Active UL BWP-0 Configuration	Config 1,2,3,4,5,6		ULBWP.0.2

Active UL BWP-1 Configuration	Config 1,2,3,4,5,6		N.A.
Active UL BWP-2 Configuration	Config 1,2,3,4,5,6		N.A.
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.2 FDD
	Config 2,5		CCR.1.2 TDD
	Config 3,6		CCR.2.4 TDD
OCNG Patterns	Config 1,2,4,5		OP.1 ^{Note 5}
	Config 3,6		OP.1 ^{Note 6}
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC Configuration			SMTC.1
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N_{oc} ^{Note 2}			
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I_o ^{Note3}	Config 1,2,4,5	dBm/9.36MHz	-58.96
	Config 3,6	dBm/38.16MHz	-52.86
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.		
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].		
Note 5:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.		
Note 6:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.		
Note 7:	NRB _c is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.		

Table A.4.5.6.1.2.1-4: NR Cell specific test parameters for NR SCell for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 3
Frequency Range			FR1
Duplex mode	Config _{SCell} 1		FDD
	Config _{SCell} 2,3		TDD
TDD configuration	Config _{SCell} 1		Not Applicable
	Config _{SCell} 2		TDDConf.1.1
	Config _{SCell} 3		TDDConf.2.1
BW _{channel}	Config _{SCell} 1,2,3	RB	Note 7
BW _{occupied}	Config _{SCell} 1,2		52 ^{Note 5}
	Config _{SCell} 3		106 ^{Note 6}
Active BWP ID			1,2
Initial DL BWP Configuration	Config _{SCell} 1,2,3		DLBWP.0.2
Active DL BWP-0 Configuration	Config _{SCell} 1,2,3		N.A.
Active DL BWP-1 Configuration	Config _{SCell} 1,2,3		DLBWP.1.3
Active DL BWP-2 Configuration	Config _{SCell} 1,2,3		DLBWP.1.1
Initial UL BWP Configuration	Config _{SCell} 1,2,3		N.A.
Active UL BWP-0 Configuration	Config _{SCell} 1,2,3		N.A.
Active UL BWP-1 Configuration	Config _{SCell} 1,2,3		N.A.
Active UL BWP-2 Configuration	Config _{SCell} 1,2,3		N.A.
PDSCH Reference measurement channel	Config _{SCell} 1		SR.1.1 FDD
	Config _{SCell} 2		SR.1.1 TDD
	Config _{SCell} 3		SR.2.1 TDD
RMSI CORESET parameters	Config _{SCell} 1		CR.1.1 FDD
	Config _{SCell} 2		CR.1.1 TDD
	Config _{SCell} 3		CR.2.1 TDD
Dedicated CORESET parameters	Config _{SCell} 1		CCR.1.2 FDD
	Config _{SCell} 2		CCR.1.2 TDD
	Config _{SCell} 3		CCR.2.4 TDD
OCNG Patterns	Config _{SCell} 1,2		OP.1 ^{Note 5}
	Config _{SCell} 3		OP.1 ^{Note 6}
SSB Configuration	Config _{SCell} 1,2		SSB.1 FR1
	Config _{SCell} 3		SSB.2 FR1
SMTc Configuration			SMTc.1
TRS Configuration	Config _{SCell} 1		TRS.1.1 FDD
	Config _{SCell} 2		TRS.1.1 TDD
	Config _{SCell} 3		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of QCNG DMRS to SSS ^{Note 1}			

EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N_{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I_o ^{Note 3}	Config _{Cell} 1,2	dBm/9.36MHz	-58.96
	Config _{Cell} 3	dBm/38.16MHz	-52.86
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3]. Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured. Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured. Note 7: NRB_c is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.			

A.4.5.6.1.2.2 Test Requirements

During T1, the UE shall start to send the ACK for SCell on PSCell from the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK for SCell on PSCell from the first UL slot that occurs after the beginning of DL slot $(j + T_{BWPswitchDelay} + k1)$.

All of the above test requirements shall be fulfilled in order for the observed SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start of the interruption of PCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PCell during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 7.32.2.7 of TS 36.133 [15].

During T1, the start of the interruption of PSCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PSCell during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PSCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.6.2.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$, $(j + T_{BWPswitchDelay} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.4.5.6.2 RRC-based Active BWP Switch

A.4.5.6.2.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC

A.4.5.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.3. Supported test configurations are shown in Table A.4.5.6.2.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1) and one NR PSCell (Cell 2) as given in Table A.4.5.6.2.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell are specified in Table A.4.5.6.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PSCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PSCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

If the *RRCReconfiguration* is embedded in E-UTRA RRC message, time period T1 starts when a E-UTRA RRC message *RRCConnectionReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side from PCell in PSCell's slot # denoted *i*. Otherwise, i.e., if the *RRCReconfiguration* is not embedded in E-UTRA RRC message, time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in from PSCell in PSCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot $(i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC})$ as defined in clause 8.6.3 and be ready for the reception of uplink grant for the PSCell no later than at the beginning of the DL slot right after slot $(i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC})$. The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot $(i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC})$.

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.4.5.6.2.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.6.2.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
PDCCH and PDSCH maximum number of HARQ transmission		1	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
T1	s	[0.2]	

Table A.4.5.6.2.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
BW _{channel}	Config 1,4		10 MHz: N _{RB,c} = 52
	Config 2,5		10 MHz: N _{RB,c} = 52
	Config 3,6		40 MHz: N _{RB,c} = 106
Active DL BWP ID			1, 2
Initial DL BWP Configuration	Config 1,4		DLBWP.0.2
	Config 2,5		
	Config 3,6		
Initial UL BWP Configuration	Config 1,4		ULBWP.0.2
	Config 2,5		
	Config 3,6		
Initial Condition	Active DL BWP-1	Config 1,4	DLBWP.1.3
		Config 2,5	

	Configurat ion	Config 3,6		
	Active UL BWP-1 Configurat ion	Config 1,4 Config 2,5 Config 3,6		ULBWP.1.3
Final Condition	Active DL BWP-1 Configurat ion	Config 1,4 Config 2,5 Config 3,6		DLBWP.1.1
	Active UL BWP-1 Configurat ion	Config 1,4 Config 2,5 Config 3,6		ULBWP.1.1
Initial UL BWP Configuration		Config 1,4 Config 2,5 Config 3,6		ULBWP.0.2
Active UL BWP-1 Configuration		Config 1,4 Config 2,5 Config 3,6		ULBWP.1.3
Active UL BWP-2 Configuration		Config 1,4 Config 2,5 Config 3,6		ULBWP.1.1
PDSCH Reference measurement channel		Config 1,4 Config 2,5 Config 3,6		SR.1.1 FDD SR.1.1 TDD SR2.1 TDD
RMSI CORESET parameters		Config 1,4 Config 2,5 Config 3,6		CR.1.1 FDD CR.1.1 TDD CR2.1 TDD
Dedicated CORESET parameters		Config 1,4 Config 2,5 Config 3,6		CCR.1.2 FDD CCR.1.2 TDD CCR.2.4 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2,4,5 Config 3,6		SSB.1 FR1 SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1,4		TRS.1.1 FDD
		Config 2,5		TRS.1.1 TDD
		Config 3,6		TRS.1.2 TDD
Antenna Configuration				1x2
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note 2}			dBm/15 kHz	[-104]
$SS-RSRP$ ^{Note 3}			dBm/15 kHz	[-87]
$\bar{E}_s/I_{ot}$			dB	17
$\bar{E}_s/N_{oc}$			dB	17
I_o ^{Note3}	Config 1,2,4,5		dBm/9.36MHz	[-59]
	Config 3,6		dBm/38.16MH z	[-61.9]

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.4.5.6.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell in the beginning of the DL slot right after slot $(i + T_{RRCP\text{rocessingDelay}} + T_{BWP\text{switchDelayRRC}})$.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.6.3 Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs

A.4.5.6.3.1 Simultaneous E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in EN-DC on multiple CCs

A.4.5.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify the requirement of DL BWP switch delay on multiple CCs in TS 38.133 clause 8.6.2A.1, and interruption requirement for E-UTRA victim cell defined in TS36.133 clause 7.32.2.7. Supported test configurations for LTE PCell and NR PSCell are shown in Table A.4.5.6.3.1.1-1. Supported test configurations for NR SCell are shown in table A.4.5.6.3.1.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.4.5.6.3.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and NR SCell are specified in Table A.4.5.6.3.1.1-3 and Table A.4.5.6.3.1.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) and SCell (Cell 3) to ensure that the UE would have ACK/NACK sending except for the time duration T2 when BWPs are switching on Cell 2 and Cell 3.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3.
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell

- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell
- UE is configured with a *bwp-InactivityTimer* timer value for PSCell and SCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PSCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted i . The UE shall switch its PSCell bandwidth part from BWP-1 to BWP-2. On the same slot on Cell 3 test equipment shall send a DCI format 1_1 command for SCell DL BWP switch. The UE shall switch its SCell bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH on PSCell and SCell at the beginning of the DL slot right after DL slot ($i + T_{MultipleBWPswitchDelay}$) as defined in clause 8.6.2A.1 and starts to report valid ACK/NACK for the PSCell and SCell no later than at the beginning of the DL slot right after DL slot ($i + T_{MultipleBWPswitchDelay} + k1$). The UE shall be continuously scheduled on both PCell's and SCell's BWP-2 starting from the beginning of the DL slot right after DL slot ($i + T_{MultipleBWPswitchDelay}$).

The starting time of PCell(Cell 1) interruption due to BWP switch on PSCell and SCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell(Cell 2) and SCell(Cell 3).

During T3,

The time period T3 starts from the slot # j , where j is the beginning slot of the DL subframe immediately after the *bwp-InactivityTimer* timer expires on PSCell. *bwp-InactivityTimer* timer on SCell shall also expire on slot # j . The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1 on both PSCell and SCell. The UE shall be able to receive PDSCH on both PSCell and SCell at the beginning of the DL slot right after DL slot ($j + T_{MultipleBWPswitchDelay}$) as defined in clause 8.6.2B.1 and starts to report valid ACK/NACK for the PSCell and SCell at latest at the beginning of the DL slot right after DL slot ($j + T_{MultipleBWPswitchDelay} + k1$). The UE shall be continuously scheduled on both PSCell's and SCell's BWP-1 starting from the beginning of the DL slot right after DL slot ($j + T_{MultipleBWPswitchDelay}$).

The starting time of PCell(Cell 1) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PSCell and SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to E-UTRA PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of PSCell and SCell.

Table A.4.5.6.3.1.1-1: DL BWP switch supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations.
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth ($BW_{channel}$) defined in each test configuration.

Table A.4.5.6.3.1.1-1A: DL BWP switch supported test configurations for NR SCell

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth (BW_{channel}) defined in each test configuration

Table A.4.5.6.3.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2,3	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
<i>bwp-InactivityTimer</i>	ms	200	For both PSCell and SCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
Cell3 timing offset to cell2	μs	3	Synchronous cells
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.4.5.6.3.1.1-3: NR Cell specific test parameters for NR PSCell for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
BW_{channel}	Config 1,4		10 MHz: $N_{RB,c} = 52$
	Config 2,5		10 MHz: $N_{RB,c} = 52$
	Config 3,6		40 MHz: $N_{RB,c} = 106$
Active BWP ID			1,2
Initial DL BWP Configuration	Config 1,4		DLBWP.0.2 ^{Note 4}
	Config 2,5		
	Config 3,6		
Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.1 ^{Note 4}
	Config 2,5		
	Config 3,6		

Active DL BWP-2 Configuration	Config 1,4		DLBWP.1.3 ^{Note 4}
	Config 2,5		
	Config 3,6		
Initial UL BWP Configuration	Config 1,4		ULBWP.0.2 ^{Note 4}
	Config 2,5		
	Config 3,6		
Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.1 ^{Note 4}
	Config 2,5		
	Config 3,6		
Active UL BWP-2 Configuration	Config 1,4		ULBWP.1.3 ^{Note 4}
	Config 2,5		
	Config 3,6		
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTc Configuration			SMTc.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N _{oc} ^{Note 2}	Config 1,2,4,5	dBm/SCS	-104
	Config 3,6		-101
N _{oc} ^{Note 2}		dBm/15kHz	-104
SS-RSRP ^{Note 3}	Config 1,2,4,5	dBm/SCS	-87
	Config 3,6		-90
Ê _s /I _{ot}		dB	17
Ê _s /N _{oc}		dB	[17
I _o ^{Note 3}	Config 1,2,4,5	dBm/ 9.36MHz	-59
	Config 3,6	dBm/ 38.16MHz	-61.9
Propagation Condition			AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_{o} levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table A.4.5.6.3.1.1-4: NR Cell specific test parameters for NR SCell for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 3
Frequency Range			FR1
Duplex mode	Config _{SCell} 1		FDD
	Config _{SCell} 2,3		TDD
TDD configuration	Config _{SCell} 1		Not Applicable
	Config _{SCell} 2		TDDConf.1.1
	Config _{SCell} 3		TDDConf.2.1
BW _{channel}	Config _{SCell} 1		10 MHz: $N_{RB,c} = 52$
	Config _{SCell} 2		10 MHz: $N_{RB,c} = 52$
	Config _{SCell} 3		40 MHz: $N_{RB,c} = 106$
Active BWP ID			1,2
Initial DL BWP Configuration	Config _{SCell} 1		DLBWP.0.2 ^{Note 4}
	Config _{SCell} 2		
	Config _{SCell} 3		
Active DL BWP-1 Configuration	Config _{SCell} 1		DLBWP.1.1 ^{Note 4}
	Config _{SCell} 2		
	Config _{SCell} 3		
Active DL BWP-2 Configuration	Config _{SCell} 1		DLBWP.1.3 ^{Note 4}
	Config _{SCell} 2		
	Config _{SCell} 3		
Initial UL BWP Configuration	Config _{SCell} 1		ULBWP.0.2 ^{Note 4}
	Config _{SCell} 2		
	Config _{SCell} 3		
Active UL BWP-1 Configuration	Config _{SCell} 1		ULBWP.1.1 ^{Note 4}
	Config _{SCell} 2		
	Config _{SCell} 3		
Active UL BWP-2 Configuration	Config _{SCell} 1		ULBWP.1.3 ^{Note 4}
	Config _{SCell} 2		
	Config _{SCell} 3		
PDSCH Reference measurement channel	Config _{SCell} 1		SR.1.1 FDD
	Config _{SCell} 2		SR.1.1 TDD
	Config _{SCell} 3		SR.2.1 TDD
RMSI CORESET parameters	Config _{SCell} 1		CR.1.1 FDD
	Config _{SCell} 2		CR.1.1 TDD
	Config _{SCell} 3		CR.2.1 TDD
Dedicated CORESET parameters	Config _{SCell} 1		CCR.1.1 FDD
	Config _{SCell} 2		CCR.1.1 TDD
	Config _{SCell} 3		CCR.2.1 TDD
OCNG Patterns			OP.1
SSB Configuration	Config _{SCell} 1,2		SSB.1 FR1
	Config _{SCell} 3		SSB.2 FR1
SMTc Configuration			SMTc.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config _{SCell} 1		TRS.1.1 FDD

	Config _{SCell} 2		TRS.1.1 TDD
	Config _{SCell} 3		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N _{OC} ^{Note 2}	Config _{SCell} 1,2	dBm/SCS	-104
	Config _{SCell} 3		-101
N _{OC} ^{Note 2}		dBm/15kHz	[-104]
SS-RSRP ^{Note 3}	Config _{SCell} 1,2	dBm/SCS	-87
	Config _{SCell} 3		-90
$\hat{E}_s/I_{ot}$		dB	[17]
$\hat{E}_s/N_{OC}$		dB	[17]
I _o ^{Note 3}	Config _{SCell} 1,2	dBm/ 9.36MHz	-59
	Config _{SCell} 3	dBm/ 38.16MHz	-61.9
Propagation Condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{OC} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

A.4.5.6.3.1.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell and SCell from the first UL slot that occurs after the beginning of DL slot ($i + T_{MultipleBWPswitchDelay} + k1$).

During T3, the UE shall start to send the ACK for PSCell and SCell from the first UL slot that occurs after the beginning of DL slot ($j + T_{MultipleBWPswitchDelay} + k1$).

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability, UE shall finish BWP switch within the time duration $T_{MultipleBWPswitchDelay}$ defined in 8.6.2A.1.

All of the above test requirements shall be fulfilled in order for the observed PSCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start time of PCell interruption during PSCell and SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start time of PCell interruption of during PSCell and SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in TS 36.133 Clause 7.32.2.7.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot $(i + T_{\text{MultipleBWPswitchDelay}} + k1)$, $(j + T_{\text{MultipleBWPswitchDelay}} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.4.5.6.4 Simultaneous RRC-based Active BWP Switch on multiple CCs

A.4.5.6.4.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC on multiple CCs

A.4.5.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL dormant BWP switch delay requirement defined in clause 8.6, and interruption requirements for NR victim cell defined in clause 8.2.1.2.15 and interruption requirement for E-UTRA victim cell defined in clause 7.32 of TS 36.133 [15]. Supported test configurations for LTE PCell and NR PSCell are shown in Table A.4.5.6.4.1.1-1. Supported test configurations for NR SCell are shown in Table A.4.5.6.4.1.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.4.5.6.4.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and SCell are specified in Table A.4.5.6.4.1.1-3 and Table A.4.5.6.4.1.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), PSCell (Cell 2) on radio channel 2 (PSCC) and SCell (Cell 3) on radio channel 3 (SCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for PSCell (Cell 2) and SCell (Cell 3)
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell (Cell 2) and SCell (Cell 3).

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration for both PSCell(Cell 2) and SCell(Cell 3), sent from the test equipment to the UE, is completely received at the UE side in PSCell's slot # denoted i . The UE shall reconfigure its bandwidth part with the updated bandwidth part configuration on PSCell(Cell 2) and SCell(Cell 3).

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot $(i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}} + D_{\text{RRC}}}{\text{NR slot length}})$ as defined in clause 8.6.3A.1 and be ready for the reception of uplink grant for the PSCell(Cell 2) and SCell(Cell 3) no later than at the beginning of the DL slot right

after slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length})$. The UE shall be continuously scheduled on PSCell's BWP-1 and SCell's BWP-1 starting from the beginning of the DL slot right after slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length})$.

$T_{RRCprocessingDelay}$, $T_{BWPswitchDelayRRC}$, D_{RRC} are defined in clause 8.6.3A.1.

The test equipment verifies the DL BWP switch time in PSCell(Cell 2) and SCell(Cell 3) by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration sent till the time when RRC Reconfiguration Complete message is received.

Table A.4.5.6.4.1.1-1: DL BWP switch supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	A UE which fulfils the requirements in the test case in clause A.4.5.6.4.2 can skip the test cases in current clause A.4.5.6.4.1.
Note 3:	Void
Note 4:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration

Table A.4.5.6.4.1.1-1A: DL BWP switch supported test configurations for NR SCell

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	A UE which fulfils the requirements in the test case in clause A.4.5.6.4.2 can skip the test cases in current clause A.4.5.6.4.1.
Note 3:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration

Table A.4.5.6.4.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2,3	Two NR radio channel is used for this test
Active PCell		Cell 1	Pcell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.

Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
Cell3 timing offset to cell2	μs	3	Synchronous cells
T1	s	[0.2]	

Table A.4.5.6.4.1.1-3: NR Cell specific test parameters for NR PSCell for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.1.2
BW _{channel}	Config 1,4		10 MHz: N _{RB,c} = 52
	Config 2,5		10 MHz: N _{RB,c} = 52
	Config 3,6		40 MHz: N _{RB,c} = 106
Active BWP ID			1,2
Initial BWP Configuration	Config 1,4		DLBWP.0.2
	Config 2,5		
	Config 3,6		
Active BWP-0 Configuration	Config 1,4		N/A
	Config 2,5		
	Config 3,6		
Active BWP-1 Configuration	Config 1,4		DLBWP.1.3
	Config 2,5		
	Config 3,6		
Active BWP-2 Configuration	Config 1,4		DLBWP.1.1
	Config 2,5		
	Config 3,6		
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORESET parameters, Test 1	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
Dedicated CORESET parameters, Test 2	Config 1,4		CCR.1.5 FDD
	Config 2,5		CCR.1.5 TDD
	Config 3,6		CCR.2.3 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC Configuration			SMTC.1
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			

EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N_{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I_o ^{Note 3}	Config 1,2,4,5	dBm/9.36MHz	-59
	Config 3,6	dBm/38.16MHz	-61.9
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

Table A.4.5.6.4.1.1-4: NR Cell specific test parameters for NR SCell for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 3
Frequency Range			FR1
Duplex mode	Config _{SCell 1}		FDD
	Config _{SCell 2,3}		TDD
TDD configuration	Config _{SCell 1}		Not Applicable
	Config _{SCell 2}		TDDConf.1.1
	Config _{SCell 3}		TDDConf.1.2
BW _{channel}	Config _{SCell 1}		10 MHz: $N_{RB,c} = 52$
	Config _{SCell 2}		10 MHz: $N_{RB,c} = 52$
	Config _{SCell 3}		40 MHz: $N_{RB,c} = 106$
Active BWP ID			0
Initial BWP Configuration	Config _{SCell 1}		DLBWP.0.2
	Config _{SCell 2}		
	Config _{SCell 3}		
Active BWP-0 Configuration	Config _{SCell 1}		DLBWP.0.2
	Config _{SCell 2}		
	Config _{SCell 3}		
Active BWP-1 Configuration	Config _{SCell 1}		N/A
	Config _{SCell 2}		
	Config _{SCell 3}		
Active BWP-2 Configuration	Config _{SCell 1}		N/A
	Config _{SCell 2}		
	Config _{SCell 3}		
PDSCH Reference measurement channel	Config _{SCell 1}		SR.1.1 FDD
	Config _{SCell 2}		SR.1.1 TDD
	Config _{SCell 3}		SR.2.1 TDD
RMSI CORESET parameters	Config _{SCell 1}		CR.1.1 FDD
	Config _{SCell 2}		CR.1.1 TDD
	Config _{SCell 3}		CR.2.1 TDD
Dedicated CORESET parameters, Test 1	Config _{SCell 1}		CCR.1.1 FDD
	Config _{SCell 2}		CCR.1.1 TDD
	Config _{SCell 3}		CCR.2.1 TDD
Dedicated CORESET parameters, Test 2	Config _{SCell 1}		CCR.1.5 FDD
	Config _{SCell 2}		CCR.1.5 TDD
	Config _{SCell 3}		CCR.2.3 TDD
OCNG Patterns			OP.1

SSB Configuration	Config _{SCell} 1,2		SSB.1 FR1
	Config _{SCell} 3		SSB.2 FR1
SMTc Configuration			SMTc.1
TRS Configuration	Config _{SCell} 1		TRS.1.1 FDD
	Config _{SCell} 2		TRS.1.1 TDD
	Config _{SCell} 3		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N _{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I _O ^{Note3}	Config _{SCell} 1,2	dBm/9.36MHz	[-59]
	Config _{SCell} 3	dBm/38.16MHz	[-61.9]

A.4.5.6.4.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell and SCell in the beginning of the DL slot right after slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length})$.

All of the above test requirements shall be fulfilled in order for the observed PSCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.6.4.2 E-UTRAN – NR FR1 PSCell SCell dormancy switch of two FR1 SCells inside active time

A.4.5.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify the delay requirement of BWP switching from dormancy to non-dormancy and from non-dormancy to dormancy on SCell defined in clause 8.6.2, and interruption requirements for NR victim cell defined in clause 8.2.1.2.15 and interruption requirement for E-UTRA victim cell defined in clause 7.32.2.7 of TS 36.133 [15]. Supported test configurations for LTE PCell and NR PSCell are shown in Table A.4.5.6.4.2.1-1. Supported test configurations for NR SCells are shown in Table A.4.5.6.4.2.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCells are chosen independently. Test configurations for two NR SCells are chosen independently.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and two NR SCells (Cell 3, and Cell 4) as given in Table A.4.5.6.4.2.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and SCells are specified in Table A.4.5.6.4.2.1-3, Table A.4.5.6.4.2.1-4 and Table A.4.5.6.4.2.1-5 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) and PSCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 3, and Cell 4) to ensure that the UE would have ACK/NACK sending except for the time duration when SCell (Cell2) performs the dormancy switching and stays in the dormant BWP.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC), Cell 3 (SCell) on radio channel 3 (SCC) and Cell 4 (SCell) on radio channel 4 (SCC).
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PSCell, BWP-0, in Cell 2 before starting the test. BWP-0 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 2 UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2 in Cell 3 and Cell 4 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PSCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in all SCells.
- UE is indicated in *dormantBWP-Id* that the dormant BWP is BWP-2 in all SCells.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for entering dormant BWP in SCell, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted i . Upon reception of the PDCCH indicating entering dormant BWP in PCell, UE shall switch the DL BWP-1 to DL BWP-2 in all SCells, i.e., switching from non-dormant BWP to dormant BWP.

The UE shall be able to receive PDSCH and report valid ACK/NACK on the PCell and PSCell all the time except interruption.

The starting time of PCell (Cell 1) interruption due to dormancy switching on SCells shall occur within the dormant BWP switch delay.

The starting time of PSCell (Cell 2) interruption due to dormancy switching on SCells shall occur within the dormant BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on all SCells.

The UE shall be able to receive PDSCH and report valid ACK/NACK on the PCell and PSCell all the time except interruption.

During T3,

Time period T3 starts when a DCI format 1_1 command for leaving dormant BWP in SCells, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted j . Upon reception of the PDCCH indicating leaving dormant BWP in PSCell, UE shall switch the DL BWP-2 to DL BWP-1 in SCells, i.e., switching from dormant BWP to non-dormant BWP.

The UE shall be able to receive PDSCH on all SCells no later than the first DL slot that occurs after the beginning of PSCell's DL slot ($j + T_{\text{multipleDormantBWPSwitchDelay}}$) as defined in clause 8.6 and starts to report valid ACK/NACK on all SCells no later than the first UL slot that occurs after the beginning of slot ($j + N$) as defined in clause 10.3 in TS38.213.

The UE shall be able to receive PDSCH and report valid ACK/NACK on the PCell and PSCell all the time except interruption.

The starting time of PCell (Cell 1) interruption due to dormancy switching on SCells shall occur within the dormant BWP switch delay.

The starting time of PSCell (Cell 2) interruption due to dormancy switching on SCells shall occur within the dormant BWP switch delay.

The test equipment verifies that potential interruption to E-UTRA PCell and NR PSCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PSCell during dormant BWP switch of SCells, respectively.

Table A.4.5.6.4.2.1-1: Dormant BWP switch supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	A UE which fulfils the requirements in the test case in current clause A.4.5.6.4.2 can skip the test cases in clause A.4.5.6.4.1
Note 3:	Void.
Note 4:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration

Table A.4.5.6.4.2.1-1A: Dormant BWP switch supported test configurations for NR SCells

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	A UE which fulfils the requirements in the test case in current clause A.4.5.6.4.2 can skip the test cases in clause A.4.5.6.4.1
Note 3:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration
Note 4:	Test configurations for two NR SCells are chosen independently.

Table A.4.5.6.4.2.1-2: General test parameters for Dormant BWP switch in synchronous EN-DC

Parameter	Unit	Value		Comment
		Test 1	Test 2	
E-UTRA RF Channel Number		1		One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3, 4		Three NR radio channels are used for this test
Active PCell		Cell 1		PCell on RF channel number 1.
Active PSCell		Cell 2		PSCell on RF channel number 2.
Active SCell		Cell 3		SCell on RF channel number 3.
Active SCell		Cell 4		SCell on RF channel number 4.
CP length		Normal		
DRX		OFF		
<i>bwp-InactivityTimer</i>	ms	200		

Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	μ s	3	Synchronous EN-DC
Cell3 timing offset to cell2	μ s	3	Synchronous cells
Cell4 timing offset to cell2	μ s	3	Synchronous cells
OFDM symbol range in slot for transmission of DCI with dormancy indication		0 – 2	3 – 11
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.4.5.6.4.2.1-3: NR Cell specific test parameters for NR PSCell for Dormant BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.1.2
BW _{channel}	Config 1,4		10 MHz: N _{RB,c} = 52
	Config 2,5		10 MHz: N _{RB,c} = 52
	Config 3,6		40 MHz: N _{RB,c} = 106
Active BWP ID			0
Initial BWP Configuration	Config 1,4		DLBWP.0.2
	Config 2,5		
	Config 3,6		
Active BWP-0 Configuration	Config 1,4		DLBWP.0.2
	Config 2,5		
	Config 3,6		
Active BWP-1 Configuration	Config 1,4		N/A
	Config 2,5		
	Config 3,6		
Active BWP-2 Configuration	Config 1,4		N/A
	Config 2,5		
	Config 3,6		
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR2.1 TDD
Dedicated CORESET parameters, Test 1	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD
Dedicated CORESET parameters, Test 2	Config 1,4		CCR.1.5 FDD
	Config 2,5		CCR.1.5 TDD
	Config 3,6		CCR.2.3 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTC Configuration			SMTC.1

TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N_{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\tilde{E}_s/I_{ot}$		dB	17
$\tilde{E}_s/N_{oc}$		dB	17
I_o ^{Note 3}	Config 1,2,4,5	dBm/9.36MHz	-59
	Config 3,6	dBm/38.16MHz	-61.9
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

Table A.4.5.6.4.2.1-4: NR Cell specific test parameters for NR SCell (Cell 3) for Dormant BWP switch in synchronous EN-DC

Parameter		Unit	Cell 3
Frequency Range			FR1
Duplex mode	Config _{SCell1} 1		FDD
	Config _{SCell1} 2,3		TDD
TDD configuration	Config _{SCell1} 1		Not Applicable
	Config _{SCell1} 2		TDDConf.1.1
	Config _{SCell1} 3		TDDConf.1.2
BW _{channel}	Config _{SCell1} 1		10 MHz: $N_{RB,c} = 52$
	Config _{SCell1} 2		10 MHz: $N_{RB,c} = 52$
	Config _{SCell1} 3		40 MHz: $N_{RB,c} = 106$
Active BWP ID			1,2
Initial BWP Configuration	Config _{SCell1} 1		N/A
	Config _{SCell1} 2		
	Config _{SCell1} 3		
Active BWP-0 Configuration	Config _{SCell1} 1		N/A
	Config _{SCell1} 2		
	Config _{SCell1} 3		
Active BWP-1 Configuration	Config _{SCell1} 1		DLBWP.1.1
	Config _{SCell1} 2		
	Config _{SCell1} 3		
Active BWP-2 Configuration	Config _{SCell1} 1		DLBWP.1.3
	Config _{SCell1} 2		
	Config _{SCell1} 3		
PDSCH Reference measurement channel	Config _{SCell1} 1		SR.1.1 FDD
	Config _{SCell1} 2		SR.1.1 TDD

	Config _{SCell1} 3		SR.2.1 TDD
RMSI CORESET parameters	Config _{SCell1} 1		CR.1.1 FDD
	Config _{SCell1} 2		CR.1.1 TDD
	Config _{SCell1} 3		CR.2.1 TDD
Dedicated CORESET parameters, Test 1	Config _{SCell1} 1		CCR.1.1 FDD
	Config _{SCell1} 2		CCR.1.1 TDD
	Config _{SCell1} 3		CCR.2.1 TDD
Dedicated CORESET parameters, Test 2	Config _{SCell1} 1		CCR.1.5 FDD
	Config _{SCell1} 2		CCR.1.5 TDD
	Config _{SCell1} 3		CCR.2.3 TDD
OCNG Patterns			OP.1
SSB Configuration	Config _{SCell1} 1,2		SSB.1 FR1
	Config _{SCell1} 3		SSB.2 FR1
SMTC Configuration			SMTC.1
TRS Configuration	Config _{SCell1} 1		TRS.1.1 FDD
	Config _{SCell1} 2		TRS.1.1 TDD
	Config _{SCell1} 3		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N _{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I _o ^{Note3}	Config _{SCell1} 1,2	dBm/9.36MHz	-59
	Config _{SCell1} 3	dBm/38.16MHz	-61.9
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

Table A.4.5.6.4.2.1-5: NR Cell specific test parameters for NR SCell (Cell 4) for Dormant BWP switch in synchronous EN-DC

Parameter		Unit	Cell 4
Frequency Range			FR1
Duplex mode	Config _{SCell2} 1		FDD
	Config _{SCell2} 2,3		TDD
TDD configuration	Config _{SCell2} 1		Not Applicable
	Config _{SCell2} 2		TDDConf.1.1
	Config _{SCell2} 3		TDDConf.1.2
BW _{channel}	Config _{SCell2} 1		10 MHz: N _{RB,c} = 52
	Config _{SCell2} 2		10 MHz: N _{RB,c} = 52
	Config _{SCell2} 3		40 MHz: N _{RB,c} = 106
Active BWP ID			1,2

Initial BWP Configuration	Config _{SCell2} 1		N/A
	Config _{SCell2} 2		
	Config _{SCell2} 3		
Active BWP-0 Configuration	Config _{SCell2} 1		N/A
	Config _{SCell2} 2		
	Config _{SCell2} 3		
Active BWP-1 Configuration	Config _{SCell2} 1		DLBWP.1.1
	Config _{SCell2} 2		
	Config _{SCell2} 3		
Active BWP-2 Configuration	Config _{SCell2} 1		DLBWP.1.3
	Config _{SCell2} 2		
	Config _{SCell2} 3		
PDSCH Reference measurement channel	Config _{SCell2} 1		SR.1.1 FDD
	Config _{SCell2} 2		SR.1.1 TDD
	Config _{SCell2} 3		SR.2.1 TDD
RMSI CORESET parameters	Config _{SCell2} 1		CR.1.1 FDD
	Config _{SCell2} 2		CR.1.1 TDD
	Config _{SCell2} 3		CR.2.1 TDD
Dedicated CORESET parameters, Test 1	Config _{SCell2} 1		CCR.1.1 FDD
	Config _{SCell2} 2		CCR.1.1 TDD
	Config _{SCell2} 3		CCR.2.1 TDD
Dedicated CORESET parameters, Test 2	Config _{SCell2} 1		CCR.1.5 FDD
	Config _{SCell2} 2		CCR.1.5 TDD
	Config _{SCell2} 3		CCR.2.3 TDD
OCNG Patterns			OP.1
SSB Configuration	Config _{SCell2} 1,2		SSB.1 FR1
	Config _{SCell2} 3		SSB.2 FR1
SMTc Configuration			SMTc.1
TRS Configuration	Config _{SCell2} 1		TRS.1.1 FDD
	Config _{SCell2} 2		TRS.1.1 TDD
	Config _{SCell2} 3		TRS.1.2 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N _{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I _o ^{Note3}	Config _{SCell2} 1,2	dBm/9.36MHz	-59
	Config _{SCell2} 3	dBm/38.16MHz	-61.9
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.		
Note 3:	SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].		

A.4.5.6.4.2.2 Test Requirements

During T1, the UE shall be able to send the ACK/NACK for all SCells before UE PDCCH indicating entering dormant BWP is received in PSCell's slot # denoted.

During T3, the UE shall start to send the ACK/NACK for all SCells from the first UL slot that occurs after the beginning of DL slot ($j+N$).

Where, N is the timing that UE provide HARQ-ACK information in response to a detection of a DCI format 1_1 indicating SCell dormancy as specified in [3].

All of the above test requirements shall be fulfilled in order for the observed SCell dormant BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start of the interruption of PCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T1, the start of the interruption of PSCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PSCell during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 7.32.2.7 of TS 36.133 [15].

The interruption of PSCell shall not be longer than the interruption duration specified for dormant BWP switch in clause 8.6.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first DL slot that occurs after the beginning of DL slot ($i+N$), ($j+N$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.4.5.6.5 SCell dormancy switch

A.4.5.6.5.1 E-UTRAN – NR FR1 PSCell SCell dormancy switch of single FR1 SCell outside active time

A.4.5.6.5.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement on multiple CCs for RRC-based BWP switch defined in clause 8.6.3A.1. Supported test configurations for LTE PCell and NR PSCell are shown in Table A.4.5.6.5.1.1-1. Supported test configurations for NR SCell are shown in Table A.4.5.6.5.1.1-1A. Test configuration for LTE PCell and NR PSCell and test configuration for NR SCell are chosen independently.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.4.5.6.5.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and NR SCell are specified in Table A.4.5.6.5.1.1-3 and Table A.4.5.6.5.1.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) and PSCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 3) to ensure that the UE would have ACK/NACK sending except for the time duration when the SCell is in dormancy during T2.

The UE is configured to monitor PDCCH for DCI format 2_6 at *ps-Offset* before the start of *onDuration*. Two tests are specified, where a UE that only supports triggering within the first three OFDM symbols of a slot shall undergo Test1 only, and a UE that supports triggering also in remaining OFDM symbols of a slot shall undergo both Test1 and Test2. In the tested scenario, *ps-Offset* is selected to correspond to the dormancy switching time specified in clause 8.6.2A.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PSCell, BWP-1 in Cell 3 before starting the test.
- UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 3 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB. BWP-1 is configured in *OutsideActiveTimeConfig* as *firstOutsideActiveTimeBWP*. BWP-2 is configured as *dormantBWP*.
- UE is configured with RRM measurement on SCC.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell.
- UE is configured to monitor DCI format 2_6, and to be active during *onDuration* even when no DCI format 2_6 is detected (*ps-WakeUp*).

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

Time period T1 starts when a DCI format 2_6 command for SCell switch from non-dormancy to dormancy, sent from the test equipment to the UE, is received at the UE side at *ps-Offset* before *onDuration*. The UE shall switch its SCell bandwidth part from BWP-1 to BWP-2 into dormancy. During T1, test equipment verifies that:

The UE shall be able to receive CSI-RS on SCell BWP-2 at the beginning of the DL slot right after SCell's DL slot ($i + T_{\text{dormantBWPswitchDelay}}$) as defined in clause 8.6. TE shall observe the periodic reporting of CQI for SCell starting from slot ($i + T_{\text{dormantBWPswitchDelay}}$).

PCell (Cell 1) interruption due to dormancy switch on SCell shall occur within the dormancy switch delay.

PSCell (Cell 2) interruption due to dormancy switch on SCell shall occur within the dormancy switch delay.

Time period T2 starts when T1 is completed. During T2, the test equipment continues to schedule the UE continuously in PCell and PSCell. The UE shall carry out CSI and RRM measurements on the dormant SCells. The UE shall report ACK/NACK in PCell and PSCell in response to scheduled PDSCH, with the maximum loss of transmitted ACK/NACKs fulfilling the requirement in clause 8.2.1.2.15. The test equipment verifies that the loss of ACK/NACKs is no larger than 1.5%.

Time period T3 starts when T2 is completed. During T3, the test equipment does not schedule the UE, by which the inactivity timer expires and the UE stops monitoring PDCCH except for signalling using DCI format 2_6 at wake-up signalling occasions.

Time period T4 starts when the UE at *ps-Offset* before *onDuration* detects a DCI format 2_6 carrying dormancy indication that indicates that SCell1 and SCell2 are to be switched from dormancy to non-dormancy. During T4, the

test equipment schedules the UE with new data indication in PCell, PSCell and SCell during *onDuration*. The test equipment verifies that:

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($j + T_{\text{dormantBWPswitchDelay}}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell at latest at the beginning of the DL slot right after slot ($j + T_{\text{dormantBWPswitchDelay}} + k1$). The UE shall be continuously scheduled on SCell's BWP-1 starting from the beginning of the DL slot right after slot ($j + T_{\text{dormantBWPswitchDelay}}$).

PCell (Cell 1) interruption due to dormancy switch on SCell shall occur within the dormancy switch delay.

PSCell (Cell 2) interruption due to dormancy switch on SCell shall occur within the dormancy switch delay.

able A.4.5.6.5.1.1-1: DL BWP switch supported test configurations for LTE PCell and NR PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth (BW_{channel}) defined in each test configuration

Table A.4.5.6.5.1.1-1A: DL BWP switch supported test configurations for NR SCell

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth (BW_{channel}) defined in each test configuration

Table A.4.5.6.5.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value		Comment
		Test1	Test2	
E-UTRA RF Channel Number		1		One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3		Two NR radio channel is used for this test
Active PCell		Cell 1		PCell on RF channel number 1.
Active PSCell		Cell 2		PSCell on RF channel number 2.
Active SCell		Cell 3		SCell on RF channel number 3.
CP length		Normal		
CSI reporting periodicity, Non-dormant BWP	ms	2		CSI reporting periodicity for periodic reporting of CQI for PCell and non-dormant SCells
CSI reporting periodicity, Dormant BWP	ms	40		CSI reporting periodicity for periodic reporting of CQI for dormant SCells

ps-Offset		Depending on UE capability		Monitoring of DCI 2_6 ahead of start of drx-onDurationTimer. Value of ps-Offset shall correspond to SCell dormancy switching time for switching of two SCells, as specified in clause 8.6.2A. Actual value depends on reported UE capabilities.
ps-WakeUp		true		Wake up for onDuration in case DCI format 2_6 is not detected.
DRX		DRX.1		
'bwp-InactivityTimer	ms	200		
Cell-individual offset for cells on RF channel number 1	dB	0		Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0		Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0		Individual offset for cells on SCC.
Cell2 timing offset to cell1	μs	3		Synchronous EN-DC
Cell3 timing offset to cell2	μs	3		Synchronous cells
Number of CSI-RS ports		4		The number of CSI-RS ports in a single resource without CRI report
OFDM symbol range in slot for transmission of DCI with dormancy indication		0 – 2	3 – 11	Test1 is based on that triggering DCI is received within the first three OFDM symbols of a slot. Test2 is based on that the triggering DCI is received later than within the first three OFDM symbols of a slot.
T1	s	10		
T2	s	0.2		
T3	s	0.2		
T4	s	10		

Table A.4.5.6.5.1.1-3: NR Cell specific test parameters for NR PSCell for DL BWP switch in synchronous EN-DC

Parameter			Unit	Cell 2
Frequency Range				FR1
Duplex mode		Config 1,4		FDD
		Config 2,3,5,6		TDD
TDD configuration		Config 1,4		Not Applicable
		Config 2,5		TDDConf.1.1
		Config 3,6		TDDConf.1.2
BW _{channel}		Config 1,4		10 MHz: N _{RB,c} = 52
		Config 2,5		10 MHz: N _{RB,c} = 52
		Config 3,6		40 MHz: N _{RB,c} = 106
Active DL BWP ID				1
Initial DL BWP Configuration		Config 1,4		DLBWP.0.2
		Config 2,5		
		Config 3,6		
Initial UL BWP Configuration		Config 1,4		ULBWP.0.2
		Config 2,5		
		Config 3,6		
Initial Condition	Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.3
		Config 2,5		
		Config 3,6		
	Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.3
		Config 2,5		
		Config 3,6		
Final Condition	Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.1
		Config 2,5		

	Active UL BWP-1 Configuration	Config 3,6		ULBWP.1.1	
		Config 1,4			
		Config 2,5			
		Config 3,6			
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD	
		Config 2,5		SR.1.1 TDD	
		Config 3,6		SR2.1 TDD	
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD	
		Config 2,5		CR.1.1 TDD	
		Config 3,6		CR2.1 TDD	
Dedicated CORESET parameters		Config 1,4		CCR.1.1 FDD	
		Config 2,5		CCR.1.1 TDD	
		Config 3,6		CCR.2.1 TDD	
OCNG Patterns				OP.1	
SSB Configuration	Config 1,2,4,5			SSB.1 FR1	
				Config 3,6	SSB.2 FR1
SMTC Configuration				SMTC.1	
TRS Configuration	Config 1,4			TRS.1.1 FDD	
				Config 2,5	TRS.1.1 TDD
				Config 3,6	TRS.1.2 TDD
Antenna Configuration				1x2	
Propagation Condition				AWGN	
EPRE ratio of PSS to SSS		dB		0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
N_{oc} ^{Note 2}		dBm/15 kHz		-104	
SS-RSRP ^{Note 3}		dBm/15 kHz		-87	
$\bar{E}_s/I_{ot}$		dB		17	
$\bar{E}_s/N_{oc}$		dB		17	
I_o ^{Note3}	Config 1,2,4,5	dBm/ 9.36MHz		-59	
		Config 3,6	dBm/ 38.16MHz		-61.9
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].					

Table A.4.5.6.5.1.1-4: NR Cell specific test parameters for NR SCell for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 3
Frequency Range			FR1
Duplex mode	Config _{SCell} 1		FDD
	Config _{SCell} 2,3		TDD
TDD configuration	Config _{SCell} 1		Not Applicable
	Config _{SCell} 2		TDDConf.1.1

BW _{channel}		Config _{SCell} 3		TDDConf.1.2
		Config _{SCell} 1		10 MHz: N _{RB,c} = 52
		Config _{SCell} 2		10 MHz: N _{RB,c} = 52
		Config _{SCell} 3		40 MHz: N _{RB,c} = 106
Active DL BWP ID				1
Initial DL BWP Configuration		Config _{SCell} 1		DLBWP.0.2
		Config _{SCell} 2		
		Config _{SCell} 3		
Initial UL BWP Configuration		Config _{SCell} 1		ULBWP.0.2
		Config _{SCell} 2		
		Config _{SCell} 3		
Initial Condition	Active DL BWP-1 Configuration	Config _{SCell} 1		DLBWP.1.3
		Config _{SCell} 2		
		Config _{SCell} 3		
	Active UL BWP-1 Configuration	Config _{SCell} 1		ULBWP.1.3
		Config _{SCell} 2		
		Config _{SCell} 3		
Final Condition	Active DL BWP-1 Configuration	Config _{SCell} 1		DLBWP.1.1
		Config _{SCell} 2		
		Config _{SCell} 3		
	Active UL BWP-1 Configuration	Config _{SCell} 1		ULBWP.1.1
		Config _{SCell} 2		
		Config _{SCell} 3		
PDSCH Reference measurement channel		Config _{SCell} 1		SR.1.1 FDD
		Config _{SCell} 2		SR.1.1 TDD
		Config _{SCell} 3		SR2.1 TDD
RMSI CORESET parameters		Config _{SCell} 1		CR.1.1 FDD
		Config _{SCell} 2		CR.1.1 TDD
		Config _{SCell} 3		CR2.1 TDD
Dedicated CORESET parameters		Config _{SCell} 1		CCR.1.1 FDD
		Config _{SCell} 2		CCR.1.1 TDD
		Config _{SCell} 3		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		Config _{SCell} 1,2		SSB.1 FR1
		Config _{SCell} 3		SSB.2 FR1
SMTc Configuration				SMTc.1
TRS Configuration		Config _{SCell} 1		TRS.1.1 FDD
		Config _{SCell} 2		TRS.1.1 TDD
		Config _{SCell} 3		TRS.1.2 TDD
Antenna Configuration				1x2
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
N _{oc} ^{Note 2}				
SS-RSRP ^{Note 3}			dBm/15 kHz	-87
Ē _s /I _{ot}			dB	17
Ē _s /N _{oc}			dB	17
I _o ^{Note3}		Config _{SCell} 1,2	dBm/ 9.36MHz	-59
		Config _{SCell} 3	dBm/ 38.16MHz	-61.9

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.4.5.6.5.1.2 Test Requirements

During T1, any interruption on PCell and PSCell due to dormancy switching of SCell shall be within the requirement specified in in clause 8.2.1.2.15.1 for NR victim cell, and clause 7.32.2.14.1 of 36.133 [15] for E-UTRA victim cell. Starting from *onDuration* in time period T1, the UE shall transmit ACK/NACK in response to scheduling in PCell and PSCell. There shall be no loss of ACK/NACK.

During time period T2, the UE shall transmit ACK/NACKs in response to scheduling in PCell and the rate of missed ACK/NACKs shall be no more than 1.5%.

During T1, any interruption on PCell and PSCell due to dormancy switching of SCell shall be within the requirement specified in in clause 8.2.1.2.15.1 for NR victim cell, and clause 7.32.2.14.1 of 36.133 [15] for E-UTRA victim cell. Starting from *onDuration* in time period T4, the UE shall transmit ACK/NACK in response to scheduling in PCell, SCell1 and SCell2. There shall be no loss of ACK/NACK.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.6.5.2 E-UTRAN – NR FR1 PSCell SCell dormancy switch of two FR1 SCells inside active time

A.4.5.6.5.2.1 Test Purpose and Environment

The purpose of this test is to verify the delay requirement of BWP switching from dormancy to non-dormancy and from non-dormancy to dormancy on SCell defined in clause 8.6.2, and interruption requirements for NR victim cell defined in clause 8.2.1.2.15 and interruption requirement for E-UTRA victim cell defined in clause 7.32.2.7 of TS 36.133 [15]. Supported test configurations are shown in Table A.4.5.6.5.2.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and two NR SCells (Cell 3, and Cell 4) as given in Table A.4.5.6.5.2.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and SCells are specified in Table A.4.5.6.5.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) and PSCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 3, and Cell 4) to ensure that the UE would have ACK/NACK sending except for the time duration when SCell (Cell2) performs the dormancy switching and stays in the dormant BWP.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC), Cell 3 (SCell) on radio channel 3 (SCC) and Cell 4 (SCell) on radio channel 4 (SCC).
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PSCell, BWP-0, in Cell 2 before starting the test. BWP-0 always include bandwidth of the initial DL BWP and SSB.

- UE is configured with 2 UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2 in Cell 3 and Cell 4 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in all SCells.
- UE is indicated in *dormantBWP-Id* that the dormant BWP is BWP-2 in all SCells.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for entering dormant BWP in SCell, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. Upon reception of the PDCCH indicating entering dormant BWP in PCell, UE shall switch the DL BWP-1 to DL BWP-2 in all SCells, i.e., switching from non-dormant BWP to dormant BWP.

The UE shall be able to receive PDSCH and report valid ACK/NACK on the PCell and PCell all the time except interruption.

The starting time of PCell (Cell 1) interruption due to dormancy switching on SCells shall occur within the dormant BWP switch delay.

The starting time of PCell (Cell 2) interruption due to dormancy switching on SCells shall occur within the dormant BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on all SCells.

The UE shall be able to receive PDSCH and report valid ACK/NACK on the PCell and PCell all the time except interruption.

During T3,

Time period T3 starts when a DCI format 1_1 command for leaving dormant BWP in SCells, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *j*. Upon reception of the PDCCH indicating leaving dormant BWP in PCell, UE shall switch the DL BWP-2 to DL BWP-1 in SCells, i.e., switching from dormant BWP to non-dormant BWP.

The UE shall be able to receive PDSCH on all SCells no later than the first DL slot that occurs after the beginning of PCell's DL slot ($j + T_{\text{mutipledormantBWPsWitchDelay}}$) as defined in clause 8.6 and starts to report valid ACK/NACK on all SCells no later than the first UL slot that occurs after the beginning of slot ($j + N$) as defined in clause 10.3 in TS38.213.

The UE shall be able to receive PDSCH and report valid ACK/NACK on the PCell and PCell all the time except interruption.

The starting time of PCell (Cell 1) interruption due to dormancy switching on SCells shall occur within the dormant BWP switch delay.

The starting time of PCell (Cell 2) interruption due to dormancy switching on SCells shall occur within the dormant BWP switch delay.

The test equipment verifies that potential interruption to E-UTRA PCell and NR PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PCell during dormant BWP switch of SCells, respectively.

Table A.4.5.6.5.2.1-1: Dormant BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: A UE which fulfils the requirements in the test case in current clause A.4.5.6.5.2 can skip the test cases in clause A.4.5.6.5.1.	
Note 3: NR configuration is the same for PSCell and SCells.	

Table A.4.5.6.5.2.1-2: General test parameters for Dormant BWP switch in synchronous EN-DC

Parameter	Unit	Value		Comment
		Test 1	Test 2	
E-UTRA RF Channel Number		1		One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3, 4		Three NR radio channels are used for this test
Active PCell		Cell 1		PCell on RF channel number 1.
Active PSCell		Cell 2		PSCell on RF channel number 2.
Active SCell		Cell 3		SCell on RF channel number 3.
Active SCell		Cell 4		SCell on RF channel number 4.
CP length		Normal		
DRX		OFF		
<i>bwp-InactivityTimer</i>	ms	200		
Cell-individual offset for cells on RF channel number 1	dB	0		Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0		Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0		Individual offset for cells on SCC.
Cell2 timing offset to cell1	μs	3		Synchronous EN-DC
Cell3 timing offset to cell2	μs	3		Synchronous cells
Cell4 timing offset to cell2	μs	3		Synchronous cells
OFDM symbol range in slot for transmission of DCI with dormancy indication		0 – 2	3 – 11	
T1	s	0.2		
T2	s	0.2		
T3	s	0.2		

Table A.4.5.6.5.2.1-3: NR Cell specific test parameters for Dormant BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2	Cell 3	Cell 4
Frequency Range			FR1		
Duplex mode	Config 1,4		FDD		
	Config 2,3,5,6		TDD		
TDD configuration	Config 1,4		Not Applicable		
	Config 2,5		TDDConf.1.1		
	Config 3,6		TDDConf.1.2		
BW _{channel}	Config 1,4		10 MHz: N _{RB,C} = 52		
	Config 2,5		10 MHz: N _{RB,C} = 52		
	Config 3,6		40 MHz: N _{RB,C} = 106		

Active BWP ID			0	1, 2
Initial BWP Configuration	Config 1,4		DLBWP.0.2	NA
	Config 2,5			
	Config 3,6			
Active BWP-0 Configuration	Config 1,4		DLBWP.0.2	NA
	Config 2,5			
	Config 3,6			
Active BWP-1 Configuration	Config 1,4		NA	DLBWP.1.1
	Config 2,5			
	Config 3,6			
Active BWP-2 Configuration	Config 1,4		NA	DLBWP.1.3
	Config 2,5			
	Config 3,6			
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD	
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR2.1 TDD	
Dedicated CORESET parameters, Test 1	Config 1,4		CCR.1.1 FDD	
	Config 2,5		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD	
Dedicated CORESET parameters, Test 2	Config 1,4		CCR.1.5 FDD	
	Config 2,5		CCR.1.5 TDD	
	Config 3,6		CCR.2.3 TDD	
OCNG Patterns			OP.1	
SSB Configuration	Config 1,2,4,5		SSB.1 FR1	
	Config 3,6		SSB.2 FR1	
SMTc Configuration			SMTc.1	
TRS Configuration	Config 1,4		TRS.1.1 FDD	
	Config 2,5		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD	
Antenna Configuration			1x2	
Propagation Condition			AWGN	
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
N _{oc} ^{Note 2}		dBm/15 kHz	-104	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87	-87
Ē _s /I _{ot}		dB	17	17
Ē _s /N _{oc}		dB	17	17
I _o ^{Note3}	Config 1,2,4,5	dBm/9.36MHz	-59	-59
	Config 3,6	dBm/38.16MHz	-61.9	-61.9
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].				

A.4.5.6.5.2.2 Test Requirements

During T1, the UE shall be able to send the ACK/NACK for all SCells before UE PDCCH indicating entering dormant BWP is received in PSCell's slot # denoted.

During T3, the UE shall start to send the ACK/NACK for all SCells from the first UL slot that occurs after the beginning of DL slot ($j+N$).

Where, N is the timing that UE provide HARQ-ACK information in response to a detection of a DCI format 1_1 indicating SCell dormancy as specified in [3].

All of the above test requirements shall be fulfilled in order for the observed SCell dormant BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start of the interruption of PCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T1, the start of the interruption of PSCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PSCell during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 7.32.2.7 of TS 36.133 [15].

The interruption of PSCell shall not be longer than the interruption duration specified for dormant BWP switch in clause 8.6.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first DL slot that occurs after the beginning of DL slot ($i+N$), ($j+N$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.4.5.7 PSCell addition and release delay

A.4.5.7.1 Addition and Release Delay of known NR PSCell

A.4.5.7.1.1 Test purpose and environment

The purpose of this test is to verify that the NR PSCell addition and release delays under EN-DC are within the requirements stated in clause 7.31.2 [15] for the case when the PSCell is known by the UE at the time of addition.

Supported test configurations are shown in A.4.5.7.1.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.1-1. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.4.5.7.1.1-2 and cell-specific parameters in A.4.5.7.1.1-3 below. The test consists of six successive time periods with duration of T1, T2, T3, T4, T5 and T6 respectively. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (NR PSCell) on radio channel 2. The UE is only monitoring the PCC. During T1 only Cell1 is known to the UE.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event B1 is configured for neighbour cell (Cell2). Before the start of T2 the UE is configured with the measurement gaps (gap pattern Id # 0). The Cell2 becomes known to the UE during T2. Therefore, during T2 the UE shall report Event B1.

The point in time at which the RRC message to release measurement gap is transmitted from the test system defines the start of period T3. During T3, after measurement gap is released, the test system transmits the RRC message to the UE to add PSCell on radio channel 2.

The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added. The point in time at which the RRC message to add PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

The test system shall observe the periodic reporting of CSI for PSCell during T5. The point in time at which the UE has sent PRACH to the PSCell (Cell 2) defines the start of period T5.

The test system shall send a RRC message to the UE to release PSCell (Cell 2) on radio channel 2. The RRC message to release PSCell (Cell2) shall be sent to the UE during period T5, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to release PSCell (Cell2) is received at the UE antenna connector defines the start of period T6.

Table A.4.5.7.1.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR SCS 15 kHz, BW 10 MHz, FDD
2	LTE FDD, NR SCS 15 kHz, BW 10 MHz, TDD
3	LTE FDD, NR SCS 30 kHz, BW 40 MHz, TDD
4	LTE TDD, NR SCS 15 kHz, BW 10 MHz, FDD
5	LTE TDD, NR SCS 15 kHz, BW 10 MHz, TDD
6	LTE TDD, NR SCS 30 kHz, BW 40 MHz, TDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.7.1.1-2: General Test Parameters for PSCell Addition and Release

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-93	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	s	0	
DRX			OFF	Continuous monitoring of primary cell
Measurement gap pattern Id			0	Gaps are configured before T2 and released before T3.
PRACH configuration on cell2			FR1 PRACH configuration 1	Captured in A.3.8.2.1
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	1.5	During this time the UE shall identify neighbour cell (cell2) and report event B1.

T3	s	3	During this time the test system transmits the RRC messages to release measurement gap and add PSCell.
T4	s	0.5	During this time the UE adds the PSCell.
T5	s	0.5	During this time the UE sends CSI reports for PSCell.
T6	s	0.5	During this time the UE releases the PSCell.

Table A.4.5.7.1.1-3: Cell Specific Parameters for PSCell Addition and Release

Parameter	Unit	Config	Test					
			T1	T2	T3	T4	T5	T6
E-UTRA RF Channel Number		1,2,3,4,5,6	1					
NR RF Channel Number		1,2,3,4,5,6	2					
TDD configuration		1,4	Not Applicable					
		2,5	TDDConf.1.1					
		3,6	TDDConf.2.1					
BW _{channel}	MHz	1,4	10: N _{RB,c} = 52					
		2,5	10: N _{RB,c} = 52					
		3,6	40: N _{RB,c} = 106					
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1					
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1					
PDSCH Reference measurement channel		1,4	SR.1.1 FDD					
		2,5	SR.1.1 TDD					
		3,6	SR.2.1 TDD					
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD					
		2,5	CR.1.1 TDD					
		3,6	CR.2.1 TDD					
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD					
		2,5	CCR.1.1 TDD					
		3,6	CCR.2.1 TDD					
OCNG Patterns		1,2,3,4,5,6	OP.1					
SSB configuration		1,2,4,5	SSB.1 FR1					
		3,6	SSB.2 FR1					
SMTc configuration		1,2,4,5	SMTc.1					
		3,6	SMTc.1					
TRS Configuration		1,4	TRS.1.1 FDD					
		2,5	TRS.1.1 TDD					
		3,6	TRS.1.2 TDD					
CSI-RS configuration for CSI reporting		1,4	CSI-RS.1.1 FDD					
		2,5	CSI-RS.1.1 TDD					
		3,6	CSI-RS.2.1 TDD					
reportConfigType		1,2,3,4,5,6	periodic					
reportQuantity		1,2,3,4,5,6	cri-RI-PMI-CQI					
CSI reporting periodicity	slot	1,2,4,5	5					
		3,6	10					
CSI reporting offset	slot	1,2,4,5	2					
		3,6	4					
EPRE ratio of PSS to SSS								
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								

EPRE ratio of PDCCH to PDCCH DMRS	dB	1,2,3,4,5,6	0	
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc}^{Note2}	dBm/15 kHz	1,2,3,4,5,6	N/A	-85
N_{oc}^{Note2}	dBm/SCS	1,2,4,5	N/A	-85
		3,6	N/A	-82
$\hat{E}_s/I_{ot}$		1,2,3,4,5,6	-infinity	0
$\hat{E}_s/N_{oc}$		1,2,3,4,5,6	-infinity	0
SS-RSRP ^{Note3}	dBm/SCS	1,2,4,5	-infinity	-85
		3,6	-infinity	-82
I_o^{Note3}	dBm/9.36MHz	1,2,4,5	N/A	-57
	dBm/38.1MHz	3,6	N/A	-51
Propagation condition		1,2,3,4,5,6	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

A.4.5.7.1.2 Test Requirements

The UE shall transmit the PRACH to PSCell no later than 82 ms^{Note1} from the start of T4.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T5.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T5.

The UE shall stop sending CSI reports for PSCell no later than 20ms from the start of T6.

All the above test requirements shall be fulfilled in order for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 7.31.2 [15]:

$$T_{\text{config_PSCell}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search}} + T_{\Delta} + T_{\text{PSCell_DU}} + 2\text{ms}$$

Where:

$$T_{\text{RRC_delay}} = 20\text{ms}$$

$$T_{\text{processing}} = 20\text{ms}$$

$$T_{\text{search}} = 0$$

$$T_{\Delta} = 20\text{ms}$$

$$T_{\text{PSCell_DU}} = 1 \times 10 + 10 = 20\text{ms}$$

A.4.5.8 DL Interruptions at switching between two uplink carriers

A.4.5.8.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink carriers defined in clause 8.2.1.2.14. The test case is applicable for an uplink band pair of an inter-band EN-DC configuration when the capability *uplinkTxSwitchingPeriod* is present.

There are two cells: E-UTRAN FDD PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters for PSCell are given in Table A. 4.5.8.1-1, Table A. 4.5.8.1-2 and Table A. 4.5.8.1-3 below.

Aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting 6dB on following symbol on the 1st special slot of every radio frame on NR TDD carrier (Cell 2):

symbol#10 if UE does not report *uplinkTxSwitching-DL-Interruption-r16*;

otherwise,

symbol#5 if UE capability *uplinkTxSwitchingPeriod* is 140us or

symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.

The test parameters and applicability for E-UTRAN FDD PCell are defined in A.3.7.2. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *uplinkTxSwitching* is indicated to UE. This test verifies that the UE correctly report the L1-RSRP reporting.

Table A. 4.5.8.1-1: Supported test configurations

Configuration	PSCell (Cell2)
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A. 4.5.8.1-2: General test parameters for DL Interruptions at switching between two uplink carriers in EN-DC

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two radio channels are used for the test.
Active cell		Config 1	Cell 1: E-UTRAN FDD PCell Cell 2: FR1 PSCell	E-UTRAN FDD PCell on RF channel number 1 FR1 PSCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A. 4.5.8.1-3: NR Cell specific test parameters for DL Interruptions at switching between two uplink carriers in EN-DC (Cell 2)

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config 1		TDD
TDD configuration	Config 1		TDDConf.2.1 except that: S='11DL: 1GP:2UL'; <i>nrofDownlinkSymbols: 11</i> <i>nrofUplinkSymbols: 2</i>
BW _{channel}	Config 1		40 MHz: N _{RB,C} = 106
Initial BWP Configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL dedicated BWP configuration			ULBWP.1.1
SRS configuration			SRSCConf.4 in Table A.4.5.8.1-4
PDSCH Reference measurement channel	Config 1		SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.2.1 TDD
OCNG Patterns			OP.1
SMTTC Configuration			SMTTC.1
SSB Configuration	Config 1		SSB.2 FR1
Correlation Matrix and Antenna Configuration			2x2 low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N _{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/SSB SCS	-84
CSI-RS RSRP ^{Note 6}		dBm/SCS	-78
$\hat{E}_s/I_{ot}$		dB	14
$\hat{E}_s/N_{oc}$		dB	14
N _{oc} ^{Note 2}	Config 1	dBm/SCS	-101
I _o ^{Note 3} on symbols without CSI-RS	Config 1	dBm/38.16MHz	-55.78
I _o ^{Note 6} on symbols with CSI-RS	Config 1	dBm/38.16MHz	-53.43
Time offset to Cell1 ^{Note 5}		μs	0
Propagation Condition			AWGN

- Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
- Note 4: Void
- Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.
- Note 6: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.4.5.8.1-4: SRS Configuration for DL Interruptions at switching between two uplink carriers

	Field	SRSSConf.4	Comments
SRS-ResourceSet	srs-ResourceSetId	0	
	srs-ResourceIdList	0	
	resourceType	Periodic	
	Usage	Codebook	
SRS-Resource	SRS-ResourceId	0	
	nrofSRS-Ports	Port2	
	transmissionComb	n2	
	combOffset-n2	0	
	cyclicShift-n2	0	
	resourceMapping startPosition	1	
	resourceMapping nrofSymbols	n2	
	resourceMapping repetitionFactor	n1	
	freqDomainPosition	0	
	freqDomainShift	0	
	freqHopping c-SRS	0	Matches $N_{RB,c}$
	freqHopping b-SRS	0	
	freqHopping b-hop	0	
	groupOrSequenceHopping	Neither	
	resourceType	Periodic	
	periodicityAndOffset-p	sl20, 3	
	sequenceId	0	

A.4.5.8.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.1.2.14.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.9 UE specific CBW change

A.4.5.9.1 UE specific CBW change on FR1 NR PSCell with non-DRX in synchronous EN- DC

A.4.5.9.1.1 Test Purpose and Environment

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13.1. Supported test configurations are shown in Table A.4.5.9.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1) and one NR PSCell (Cell 2) as given in Table A.4.5.9.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell are specified in Table A.4.5.9.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PSCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PSCell.
- UE is indicated in *SCS-SpecificCarrier* that the active CBW is CBW-1 of initial condition in PSCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated CBW configuration, sent from the test equipment to the UE, is completely received at the UE side in PSCell's slot # denoted *i*. The UE shall reconfigure its CBW with the updated CBW of final condition (CBW-2).

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$) as defined in clause 8.13.1 and be ready for the reception of uplink grant for the PSCell no later than at the beginning of the DL slot right after slot ($i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$). The UE shall be continuously scheduled on PSCell's BWP-1 of CBW-2 starting from the beginning of the DL slot right after slot ($i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$).

$T_{RRCprocessingDelay}$ and $T_{CBWchangeDelayRRC}$ are defined in clause 8.13.1.

The test equipment verifies the UE specific CBW change time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated CBW configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.4.5.9.1.1-1: UE specific CBW change supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.4.5.9.1.1-2: General test parameters for UE specific CBW change in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	µs	3	Synchronous EN-DC
T1	s	0.2	

A.4.5.9.1.1-3: NR Cell specific test parameters for UE specific CBW change in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.1.2
BW _{channel}	Config 1,4		10 MHz: N _{RB,c} = 52
	Config 2,5		10 MHz: N _{RB,c} = 52
	Config 3,6		40 MHz: N _{RB,c} = 106
Active DL BWP ID			0
Initial DL BWP Configuration (BWP-1) before and after UE specific CBW change	Config 1,4		DLBWP.0.2
	Config 2,5		
	Config 3,6		
Initial UL BWP (BWP-1) Configuration before and after UE specific CBW change	Config 1,4		ULBWP.0.2
	Config 2,5		
	Config 3,6		
Initial Condition	Active DL CBW Configuration (CBW-1)	Config 1,4	DLCBW.1.1
		Config 2,5	
		Config 3,6	
	Active UL CBW Configuration (CBW-1)	Config 1,4	ULCBW.1.1
		Config 2,5	
		Config 3,6	
Final Condition	Active DL CBW	Config 1,4	DLCBW.1.2
		Config 2,5	

	Configurat ion (CBW- 2)	Config 3,6		
	Active UL CBW Configurat ion (CBW- 2)	Config 1,4		ULCBW.1.2
		Config 2,5		
		Config 3,6		
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2,5		SR.1.1 TDD
		Config 3,6		SR2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2,5		CR.1.1 TDD
		Config 3,6		CR2.1 TDD
Dedicated CORESET parameters		Config 1,4		CCR.1.1 FDD
		Config 2,5		CCR.1.1 TDD
		Config 3,6		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2,4,5		SSB.1 FR1
		Config 3,6		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1,4		TRS.1.1 FDD
		Config 2,5		TRS.1.1 TDD
		Config 3,6		TRS.1.2 TDD
Antenna Configuration				1x2 low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note 2}			dBm/15 kHz	-104
SS-RSRP ^{Note 3}			dBm/15 kHz	-87
$\bar{E}_s/I_{ot}$			dB	17
$\bar{E}_s/N_{oc}$			dB	17
I_o ^{Note 3}	Config 1,2,4,5		dBm/9.36MHz	-58.96
	Config 3,6		dBm/38.16MH z	-52.86
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].				

A.4.5.9.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell in the beginning of the DL slot right after slot $(i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length})$.

All of the above test requirements shall be fulfilled in order for the observed PSCell UE specific CBW change delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.4.5.10 PSCell activation and deactivation delay

A.4.5.10.1 PSCell activation and deactivation delay

A.4.5.10.1.1 Test purpose and environment

The purpose of this test is to verify that the NR PSCell activation and deactivation delay under EN-DC are within the requirements stated in clause 7.38 in TS 36.133 [15] for the case when UE configured with one deactivated SCG and when PSCell in one SCG is being activated where the PSCell is known by the UE at the time of activation.

Supported test configurations are shown in A.4.5.10.1.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.2-1. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.4.5.10.1.1-2, cell-specific parameters in A.4.5.10.1.1-3 below. The test consists of four successive time periods with duration of T1, T2, T3 and T4. There are two carriers each with one cell. The UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) and PSCell (Cell2) is in deactivated state. During T1, both Cell1 and Cell2 are known to UE and UE performs measurement on deactivated PCell. Before the test starts the UE is configured RLM and BFD on deactivated PSCell. During T1, UE performs RLM and BFD on the deactivated PSCell and TCI state is known.

The test system shall send a RRC message to the UE to activate PSCell (Cell 2) on radio channel 2, where no any PSCell parameter is modified in the RRC message. The RRC message (to activate PSCell) also includes a request for the UE to transmit scheduling request on PUCCH for the PSCell after the PSCell has been successfully activated. The RRC message to activate PSCell shall be sent to the UE during period T1. The point in time at which the RRC message to activate PSCell (Cell2) is received at the UE antenna connector defines the start of period T2.

The test system shall observe the periodic reporting of CSI for PSCell during T3. The point in time at which the UE has sent scheduling request on PUCCH for PSCell (Cell 2) defines the start of period T3.

The test system shall send a RRC message to the UE to deactivate PSCell (Cell 2) on radio channel 2. The RRC message to deactivate PSCell (Cell2) shall be sent to the UE during period T3, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to deactivate PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

Table A.4.5.10.1.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR SCS 15 kHz, BW 10 MHz, FDD
2	LTE FDD, NR SCS 15 kHz, BW 10 MHz, TDD
3	LTE FDD, NR SCS 30 kHz, BW 40 MHz, TDD
4	LTE TDD, NR SCS 15 kHz, BW 10 MHz, FDD
5	LTE TDD, NR SCS 15 kHz, BW 10 MHz, TDD
6	LTE TDD, NR SCS 30 kHz, BW 40 MHz, TDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.10.1.1-2: General Test Parameters for PSCell activation and deactivation

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Deactivated cell		Cell2	To be activated PSCell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Deactivated cell		Cell2	PSCell deactivated on RF channel number 2.
DRX			OFF	Continuous monitoring of primary cell
Scheduling request resource prodiicity			20ms	At the starting of period T3, UE sends a SR on PUCCH for PSCell
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	1	During this time the UE adds the PSCell.
T3		s	1	During this time the UE sends CSI reports for PSCell.
T4		s	1	During this time the UE releases the PSCell.

Table A.4.5.10.1.1-3: Cell Specific Parameters for PSCell activation and deactivation

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA RF Channel Number		1,2,3,4,5,6	1			
NR RF Channel Number		1,2,3,4,5,6	2			
TDD configuration		1,4	Not Applicable			
		2,5	TDDConf.1.1			
		3,6	TDDConf.2.1			
BW _{channel}	MHz	1,4	10: N _{RB,c} = 52			
		2,5	10: N _{RB,c} = 52			
		3,6	40: N _{RB,c} = 106			
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1			
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1			
PDSCH Reference measurement channel		1,4	SR.1.1 FDD			
		2,5	SR.1.1 TDD			
		3,6	SR.2.1 TDD			
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD			
		2,5	CR.1.1 TDD			
		3,6	CR.2.1 TDD			
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD			
		2,5	CCR.1.1 TDD			
		3,6	CCR.2.1 TDD			
OCNG Patterns		1,2,3,4,5,6	OP.1			
SSB configuration		1,2,4,5	SSB.1 FR1			
		3,6	SSB.2 FR1			
SMTC configuration		1,2,4,5	SMTC.1			
		3,6	SMTC.1			
TRS Configuration		1,4	TRS.1.1 FDD			
		2,5	TRS.1.1 TDD			
		3,6	TRS.1.2 TDD			
CSI-RS configuration for CSI reporting		1,4	CSI-RS.1.1 FDD			
		2,5	CSI-RS.1.1 TDD			
		3,6	CSI-RS.2.1 TDD			

reportConfigType		1,2,3,4,5,6	periodic	
reportQuantity		1,2,3,4,5,6	cri-RI-PMI-CQI	
CSI reporting periodicity	slot	1,2,4,5	5	
		3,6	10	
CSI reporting offset	slot	1,2,4,5	2	
		3,6	4	
EPRE ratio of PSS to SSS	dB	1,2,3,4,5,6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc}^{Note2}	dBm/15 kHz	1,2,3,4,5,6	N/A	-85
N_{oc}^{Note2}	dBm/SCS	1,2,4,5	N/A	-85
		3,6	N/A	-82
$\hat{E}_s/I_{ot}$		1,2,3,4,5,6	-infinity	0
$\hat{E}_s/N_{oc}$		1,2,3,4,5,6	-infinity	0
SS-RSRP ^{Note3}	dBm/SCS	1,2,4,5	-infinity	-85
		3,6	-infinity	-82
Io ^{Note3}	dBm/9.36MHz	1,2,4,5	N/A	-57
	dBm/38.1MHz	3,6	N/A	-51
Propagation condition		1,2,3,4,5,6	AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			

A.4.5.10.1.2 Test Requirements

The UE performs RACH-less based PSCell activation. UE shall transmit the SR on PUCCH for PSCell at latest 65 ms^{Note1} into T2.

The UE shall send at least one PUSCH on PSCell during T3.

The UE shall stop transmit PUSCH for PSCell in at latest 20 ms into T4.

All the above test requirements shall be fulfilled for the observed PSCell activation delay and PSCell deactivation delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 7.38 in TS 36.133 [15]:

$$T_{\text{activation_time}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search}} + T_{\Delta} + T_{\text{IU}} + 2 \text{ ms}$$

Where:

$$T_{\text{RRC_delay}} = 20 \text{ ms}$$

$$T_{\text{processing}} = 5 \text{ ms}$$

$$T_{\text{search}} = 0 \text{ ms}$$

$$T_{\Delta} = 20 \text{ ms}$$

$$T_{\text{IU}} = \max 20 \text{ ms}$$

A.4.5.11 Conditional PSCell addition and release delay (FR1 EN-DC)

A.4.5.11.1 Conditional PSCell Addition and Release Delay

A.4.5.11.1.1 Test purpose and environment

The purpose of this test is to verify that the NR conditional PSCell addition and release delay under EN-DC is within the requirements stated in clause 8.9A.2.

A.4.5.11.1.2 Test Parameters

Supported test configurations are shown in A.4.5.11.1.2-1. The test parameters for the E-UTRA cell are given in Table A.4.5.11.1.2-2. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.4.5.11.1.2-2 and cell-specific parameters in A.4.5.11.1.2-3 below. The test consists of four successive time periods with duration of T1, T2, T3 and T4 respectively. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (NR PSCell) on radio channel 2. The UE is only monitoring the PCC. During T1 only Cell1 is known to the UE.

At the start of time duration T1, the UE does not have any timing information of Cell 2. The network shall configure a condition and the target PSCell configuration implying addition to cell 2 during T1, at a time earlier than $T_{\text{RRC_delay}}$ before the beginning of T2.

At the start of T2, cell 2 becomes detectable and meets the addition condition. UE shall be able to measure and detect that the condition is fulfilled during time Tmeasure. After which it will transmit the PRACH preamble. Reception by the test system of the PRACH preamble defines the start of T3.

During T3, the UE shall send periodic CSI reports in PSCell. After having received at least one such report, the test system shall send an RRC message instructing the UE to release the PSCell. Reception by the UE of the RRC message defines the start of T4.

During T4, the UE shall release the PSCell.

Table A.4.5.11.1.2-1: Supported test configurations for FR1 PSCell

Configuration	Description
---------------	-------------

1	LTE FDD, NR SCS 15 kHz, BW 10 MHz, FDD
2	LTE FDD, NR SCS 15 kHz, BW 10 MHz, TDD
3	LTE FDD, NR SCS 30 kHz, BW 40 MHz, TDD
4	LTE TDD, NR SCS 15 kHz, BW 10 MHz, FDD
5	LTE TDD, NR SCS 15 kHz, BW 10 MHz, TDD
6	LTE TDD, NR SCS 30 kHz, BW 40 MHz, TDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.4.5.11.1.2-2: General Test Parameters for Conditional PSCell Addition and Release

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-93	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	s	0	
DRX			OFF	Continuous monitoring of primary cell
Measurement gap pattern Id			0	Gaps are configured before T2 and released before T3.
PRACH configuration on cell2			FR1 PRACH configuration 1	Captured in A.3.8.2.1
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.
T1		s	5	During this time the PCell is known and Cell 2 is unknown.
T2		s	≤7	During this time Cell 2 meets the addition condition and UE adds this PSCell.
T3		s	1	During this time the UE sends CSI reports for Cell 2. And the test system shall send an RRC message instructing the UE to release the PSCell.
T4		s	1	During this time the UE releases the Cell 2.

Table A.4.5.11.1.2-3: Cell Specific Parameters for Conditional PSCell Addition and Release

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA RF Channel Number		1,2,3,4,5,6	1			
NR RF Channel Number		1,2,3,4,5,6	2			
TDD configuration		1,4	Not Applicable			
		2,5	TDDConf.1.1			
		3,6	TDDConf.2.1			
BW _{channel}	MHz	1,4	10: N _{RB,c} = 52			
		2,5	10: N _{RB,c} = 52			
		3,6	40: N _{RB,c} = 106			

Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1	
PDSCH Reference measurement channel		1,4	SR.1.1 FDD	
		2,5	SR.1.1 TDD	
		3,6	SR.2.1 TDD	
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD	
		2,5	CR.1.1 TDD	
		3,6	CR.2.1 TDD	
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD	
		2,5	CCR.1.1 TDD	
		3,6	CCR.2.1 TDD	
OCNG Patterns		1,2,3,4,5,6	OP.1	
SSB configuration		1,2,4,5	SSB.1 FR1	
		3,6	SSB.2 FR1	
SMTTC configuration		1,2,4,5	SMTTC.1	
		3,6	SMTTC.1	
TRS Configuration		1,4	TRS.1.1 FDD	
		2,5	TRS.1.1 TDD	
		3,6	TRS.1.2 TDD	
CSI-RS configuration for CSI reporting		1,4	CSI-RS.1.1 FDD	
		2,5	CSI-RS.1.1 TDD	
		3,6	CSI-RS.2.1 TDD	
reportConfigType		1,2,3,4,5,6	periodic	
reportQuantity		1,2,3,4,5,6	cri-RI-PMI-CQI	
CSI reporting periodicity	slot	1,2,4,5	5	
		3,6	10	
CSI reporting offset	slot	1,2,4,5	2	
		3,6	4	
EPRE ratio of PSS to SSS	dB	1,2,3,4,5,6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc}^{Note2}	dBm/15 kHz	1,2,3,4,5,6	N/A	-85
N_{oc}^{Note2}	dBm/SCS	1,2,4,5	N/A	-85
		3,6	N/A	-82
$\hat{E}_s/I_{ot}$		1,2,3,4,5,6	-infinity	0
$\hat{E}_s/N_{oc}$		1,2,3,4,5,6	-infinity	0
SS-RSRP ^{Note3}	dBm/SCS	1,2,4,5	-infinity	-85
		3,6	-infinity	-82
I_o^{Note3}	dBm/9.36MHz	1,2,4,5	N/A	-57

	dBm/38.1MHz	3,6	N/A	-51
Propagation condition		1,2,3,4,5,6	AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			

A.4.5.11.1.3 Test Requirements

$T_{RRC_delay} + T_{Event_DU}$ occurs during T1 as the addition condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{UE_preparation} + T_{processing} + T_{\Delta} + T_{PSCell_DU} + 2$ ms = 1040+10+62ms=1112 ms from the start of T2.

The UE shall transmit at least one periodic CSI report for PSCell during T3.

The UE shall stop transmitting CSI reports for PSCell at latest 20 ms into T4.

All of the above test requirements shall be fulfilled in order for the observed conditional PSCell addition and release delay to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

A.4.6 Measurement procedure

A.4.6.1 Intra-frequency Measurements

A.4.6.1.1 EN-DC event triggered reporting tests without gap under non-DRX

A.4.6.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.4.6.1.1.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.1.1.2-1, A.4.6.1.1.2-2, A.4.6.1.1.2-3 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

Table A.4.6.1.1.2-1: Supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.1.1.2-2: General test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4, 5, 6	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1, 2, 3, 4, 5, 6	NR Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3, 4, 5, 6	1: Cell 1 2: Cell 2 and Cell 3	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SMTC.1	
A3-Offset	dB	1, 2, 3, 4, 5, 6	-4.5	
CP length		1, 2, 3, 4, 5, 6	Normal	
Hysteresis	dB	1, 2, 3, 4, 5, 6	0	
Time To Trigger	s	1, 2, 3, 4, 5, 6	0	
Filter coefficient		1, 2, 3, 4, 5, 6	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	N/A	OFF
Time offset between PCell and PSCell		1, 2, 3, 4, 5, 6	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2, 5	3 μ s	Synchronous cells
		3, 6	3 μ s	Synchronous cells
T1	s	1, 2, 3, 4, 5, 6	5	
T2	s	1, 2, 3, 4, 5, 6	5	

Table A.4.6.1.1.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2, 5	TDDConf.1.1		TDDConf.1.1	
		3, 6	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2, 5	SR.1.1 TDD			
		3, 6	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2, 5	CR.1.1 TDD		N/A	
		3, 6	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		N/A	
		2, 5	CCR.1.1 TDD		N/A	
		3, 6	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1		OP.1	

TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2, 5	TRS.1.1 TDD		N/A	
		3, 6	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2, 5	-98			
		3, 6	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2, 5				
		3, 6				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2, 5				
		3, 6				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2, 5				
		3, 6				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2, 5	-94	-94	-Infinity	-94
		3, 6	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2, 5	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3, 6	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not setttable parameters themselves.						

A.4.6.1.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.2 EN-DC event triggered reporting tests without gap under DRX

A.4.6.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.4.6.1.2.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.1.2.1-1, A.4.6.1.2.1-2, A.4.6.1.2.1-3 and A.4.6.1.2.1-4 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

UE needs to be provided 500ms with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.1.2.2-1: Supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.1.2.2-2: General test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3, 4, 5, 6	E-UTRAN Cell 1 and NR Cell 2		
Neighbour cell		1, 2, 3, 4, 5, 6	NR Cell 3		Cell to be identified.
RF Channel Number		1, 2, 3, 4, 5, 6	1: Cell 1 2: Cell 2 and Cell 3		
SSB configuration		1, 4	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.2 FR1		
SMTC configuration		1, 4	SMTC.2		
		2, 5	SMTC.1		
		3, 6	SMTC.1		
A3-Offset	dB	1, 2, 3, 4, 5, 6	-4.5		
CP length		1, 2, 3, 4, 5, 6	Normal		

Hysteresis	dB	1, 2, 3, 4, 5, 6	0		
Time To Trigger	s	1, 2, 3, 4, 5, 6	0		
Filter coefficient		1, 2, 3, 4, 5, 6	0		L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.1	DRX. 7	
Time offset between PCell and PSCell		1, 2, 3, 4, 5, 6	3 μ s		Synchronous EN-DC
Time offset between serving and neighbour cells		1, 4	3 ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2, 5	3 μ s		Synchronous cells
		3, 6	3 μ s		Synchronous cells
T1	s	1, 2, 3, 4, 5, 6	5		
T2	s	1, 2, 3, 4, 5, 6	5	10	

Table A.4.6.1.2.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2, 5	TDDConf.1.1		TDDConf.1.1	
		3, 6	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2, 5	SR.1.1 TDD			
		3, 6	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2, 5	CR.1.1 TDD		N/A	
		3, 6	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		N/A	
		2, 5	CCR.1.1 TDD		N/A	
		3, 6	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2, 5	TRS.1.1 TDD		N/A	
		3, 6	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2, 5	-98			
		3, 6	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2, 5				
		3, 6				

$\hat{E}_s / I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2, 5				
		3, 6				
$\hat{E}_s / N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2, 5				
		3, 6				
SS-RSRP ^{Note 3}	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2, 5	-94	-94	-Infinity	-94
		3, 6	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2, 5	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.4.6.1.2.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.3 EN-DC event triggered reporting tests with per-UE gaps under non-DRX

A.4.6.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.4.6.1.3.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.1.3.1-1 and A.4.6.1.3.1-2 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.4.6.1.3.2-1: Supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.1.3.2-2: General test parameters for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4, 5, 6	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1, 2, 3, 4, 5, 6	NR Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3, 4, 5, 6	1: Cell 1 2: Cell 2 and Cell 3	
Measurement gap type		1, 2, 3, 4, 5, 6	Per-UE gaps	
Measurement gap repetition periodicity	ms	1, 2, 3, 4, 5, 6	40	
Measurement gap length	ms	1, 2, 3, 4, 5, 6	6	
Measurement gap offset	ms	1, 2, 3, 4, 5, 6	39	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SMTC.1	
CSI-RS parameters		1, 4	CSI-RS.1.2 FDD resource #0	
		2, 5	CSI-RS.1.2 TDD resource #0	
		3, 6	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3, 4, 5, 6	-4.5	
CP length		1, 2, 3, 4, 5, 6	Normal	
Hysteresis	dB	1, 2, 3, 4, 5, 6	0	
Time To Trigger	s	1, 2, 3, 4, 5, 6	0	
Filter coefficient		1, 2, 3, 4, 5, 6	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	N/A	OFF

Time offset between PCell and PSCell		1, 2, 3, 4, 5, 6	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2, 5	3 μ s	Synchronous cells
		3, 6	3 μ s	Synchronous cells
T1	s	1, 2, 3, 4, 5, 6	5	
T2	s	1, 2, 3, 4, 5, 6	5	

Table A.4.6.1.3.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2, 5	TDDConf.1.1		TDDConf.1.1	
		3, 6	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2, 5	SR.1.1 TDD			
		3, 6	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2, 5	CR.1.1 TDD		N/A	
		3, 6	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.2 FDD		N/A	
		2, 5	CCR.1.2 TDD		N/A	
		3, 6	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2, 5	TRS.1.1 TDD		N/A	
		3, 6	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3, 4, 5, 6	CSI-RS		SSB	
N_{oc} ^{Note 2}	dBm/SCS	1, 4	-98			
		2, 5	-98			
		3, 6	-95			
N_{oc} ^{Note 2}	dBm/15 kHz	1, 4	-98			
		2, 5				
		3, 6				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2, 5				
		3, 6				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2, 5				
		3, 6				

SS-RSRP ^{Note 3}	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2, 5	-94	-94	-Infinity	-94
		3, 6	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2, 5	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3, 6	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.4.6.1.3.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.4 EN-DC event triggered reporting tests with per-UE gaps under DRX

A.4.6.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.4.6.1.4.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.1.4.2-1, A.4.6.1.4.2-2, A.4.6.1.4.2-3 A.4.6.1.4.2-4 and A.4.6.1.4.2-5 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

UE needs to be provided with new Timing Advance Command MAC control at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.1.4.2-1: Supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.1.4.2-2: General test parameters for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3, 4, 5, 6	E-UTRAN Cell 1 and NR Cell 2		
Neighbour cell		1, 2, 3, 4, 5, 6	NR Cell 3		Cell to be identified.
RF Channel Number		1, 2, 3, 4, 5, 6	1: Cell 1 2: Cell 2 and Cell 3		
Measurement gap type		1, 2, 3, 4, 5, 6	Per-UE gaps		
Measurement gap repetition periodicity	ms	1, 2, 3, 4, 5, 6	40		
Measurement gap length	ms	1, 2, 3, 4, 5, 6	6		
Measurement gap offset	ms	1, 2, 3, 4, 5, 6	39		
SSB configuration		1, 4	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.2 FR1		
SMTC configuration		1, 4	SMTC.2		
		2, 5	SMTC.1		
		3, 6	SMTC.1		
CSI-RS parameters		1, 4	CSI-RS.1.2 FDD resource #0		
		2, 5	CSI-RS.1.2 TDD resource #0		
		3, 6	CSI-RS.2.2 TDD resource #0		
A3-Offset	dB	1, 2, 3, 4, 5, 6	-4.5		
CP length		1, 2, 3, 4, 5, 6	Normal		
Hysteresis	dB	1, 2, 3, 4, 5, 6	0		
Time To Trigger	s	1, 2, 3, 4, 5, 6	0		
Filter coefficient		1, 2, 3, 4, 5, 6	0		L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.1	DRX. 7	
Time offset between PCell and PSCell		1, 2, 3, 4, 5, 6	3 μ s		Synchronous EN-DC
Time offset between serving and neighbour cells		1, 4	3 ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2, 5	3 μ s		Synchronous cells
		3, 6	3 μ s		Synchronous cells

T1	s	1, 2, 3, 4, 5, 6	5		
T2	s	1, 2, 3, 4, 5, 6	5	10	

Table A.4.6.1.4.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting with per-UE gaps for PSCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2, 5	TDDConf.1.1		TDDConf.1.1	
		3, 6	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2, 5	SR.1.1 TDD			
		3, 6	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2, 5	CR.1.1 TDD		N/A	
		3, 6	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.2 FDD		N/A	
		2, 5	CCR.1.2 TDD		N/A	
		3, 6	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2, 5	TRS.1.1 TDD		N/A	
		3, 6	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3, 4, 5, 6	CSI-RS		SSB	
N_{oc} ^{Note 2}	dBm/SCS	1, 4	-98			
		2, 5	-98			
		3, 6	-95			
N_{oc} ^{Note 2}	dBm/15 KHz	1, 4	-98			
		2, 5				
		3, 6				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2, 5				
		3, 6				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2, 5				
		3, 6				
SS-RSRP ^{Note 3}	dBm/SCS KHz	1, 4	-94	-94	-Infinity	-94
		2, 5	-94	-94	-Infinity	-94
		3, 6	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2, 5	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3, 6	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.4.6.1.4.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.5 EN-DC event triggered reporting tests without gap under non-DRX with SSB index reading

A.4.6.1.5.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.4.6.1.5.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for FDD PSCell are given in Table A.4.6.1.5.1-1 and A.4.6.1.5.1-2 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

Table A.4.6.1.5.2-1: Supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2

Table A.4.6.1.5.2-2: General test parameters for EN-DC intra-frequency event triggered reporting without gap for FDD PSCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1, 2	NR Cell 3	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 2: Cell 2 and Cell 3	
SSB configuration		1, 2	SSB.1 FR1	
SMTC configuration		1, 2	SMTC.2	
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	N/A	OFF
Time offset between PCell and PSCell		1, 2	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		1, 2	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.4.6.1.5.1-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting without gap for FDD PSCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1, 2	N/A		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46

$\hat{E}_s / N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP ^{Note 3}	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1, 2	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.4.6.1.5.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.6 EN-DC event triggered reporting tests with SSB index reading with per-UE gaps

A.4.6.1.6.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.4.6.1.6.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.1.6.2-1 A.4.6.1.6.2-2 and A.4.6.1.6.2-3 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.4.6.1.6.2-1: Supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.1.6.2-2: General test parameters for EN-DC intra-frequency event triggered reporting with gap for PSCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1, 2	NR Cell 3	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 2: Cell 2 and Cell 3	
Measurement gap type		1, 2	Per-UE gaps	
Measurement gap repetition periodicity	ms	1, 2	40	
Measurement gap length	ms	1, 2	6	
Measurement gap offset	ms	1, 2	39	
SSB configuration		1, 2	SSB.1 FR1	
SMTC configuration		1, 2	SMTC.2	
CSI-RS parameters		1, 2	CSI-RS.1.2 FDD resource #0	
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	N/A	OFF
Time offset between PCell and PSCell		1, 2	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		1, 2	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.4.6.1.6.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting with gap for PSCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1, 2	N/A		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.2 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.2		ULBWP.1.1	

RLM-RS		1, 2	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1, 2	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.4.6.1.6.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.7 EN-DC event triggered reporting tests under DRX for UE configured with highSpeedMeasFlag-r16

A.4.6.1.7.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event for UE configured with highSpeedMeasFlag-r16. This test will partly verify the intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.4.6.1.7.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.1.7.1-1, A.4.6.1.7.1-2, A.4.6.1.7.1-3 and A.4.6.1.7.1-4 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.1.7.2-1: Supported test configurations

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	
Note 2: Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.1.7.2-2: General test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Test configuration	Value	Comment
<i>highSpeedMeasFlag-r16</i>		1,2,3,4,5,6	Present	To enable high speed measurement enhancements
Active cell		1, 2, 3,4,5,6	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1, 2, 3,4,5,6	NR Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3,4,5,6	1: Cell 1 2: Cell 2 and Cell 3	
SSB configuration		1,4	SSB.1 FR1	
		2,5	SSB.1 FR1	
		3,6	SSB.2 FR1	
SMTC configuration		1,4	SMTC.2	
		2,5	SMTC.1	
		3,6	SMTC.1	
A3-Offset	dB	1, 2, 3,4,5,6	-4.5	
CP length		1, 2, 3,4,5,6	Normal	
Hysteresis	dB	1, 2, 3,4,5,6	0	
Time To Trigger	s	1, 2, 3,4,5,6	0	
Filter coefficient		1, 2, 3,4,5,6	0	L3 filtering is not used
DRX		1, 2, 3,4,5,6	DRX. 7.	640ms DRX cycle
Time offset between PCell and PSCell		1, 2, 3,4,5,6	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		1,4	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2,5	3 μ s	Synchronous cells
		3,6	3 μ s	Synchronous cells
T1	s	1, 2, 3,4,5,6	5	
T2	s	1, 2, 3,4,5,6	6	

Table A.4.6.1.7.2-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1,4	N/A		N/A	
		2,5	TDDConf.1.1		TDDConf.1.1	
		3,6	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1,4	SR.1.1 FDD		N/A	
		2,5	SR.1.1 TDD			
		3,6	SR.2.1 TDD			
RMSI CORESET RMC configuration		1,4	CR.1.1 FDD		CR.1.1 FDD	
		2,5	CR.1.1 TDD		CR.1.1 TDD	
		3,6	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1,4	CCR.1.1 FDD		CCR.1.1 FDD	
		2,5	CCR.1.1 TDD		CCR.1.1 TDD	
		3,6	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3,4,5,6	OP.1		OP.1	
TRS configuration		1,4	TRS.1.1 FDD		N/A	
		2,5	TRS.1.1 TDD		N/A	
		3,6	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3,4,5,6	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3,4,5,6	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3,4,5,6	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3,4,5,6	SSB		SSB	
N_{oc} ^{Note 2}	dBm/SCS	1,4	-98			
		2,5	-98			
		3,6	-95			
N_{oc} ^{Note 2}	dBm/15 kHz	1,4	-98			
		2,5				
		3,6				
$\hat{E}_s/I_{ot}$	dB	1,4	4	-1.46	-Infinity	-1.46
		2,5				
		3,6				
$\hat{E}_s/N_{oc}$	dB	1,4	4	4	-Infinity	4
		2,5				
		3,6				
SS-RSRP ^{Note 3}	dBm/SCS kHz	1,4	-94	-94	-Infinity	-94
		2,5	-94	-94	-Infinity	-94
		3,6	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1,4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2,5	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3,6	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2,4,5	AWGN		AWGN 1944 Hz ^{Note 4}	
		3,6	AWGN		AWGN 3334 Hz ^{Note 5}	

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944Hz.
Note 5:	The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334Hz.

A.4.6.1.7.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 5120 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.1.8 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used for UE configured with *highSpeedMeasCA-Scell-r17*

A.4.6.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC intra-frequency NR measurement requirements in clause 9.2.5.

In this test, there are four cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1, NR cell 3 as deactivated SCell in FR1 on NR RF channel 2, and NR cell 4 as neighbour cell on the same frequency as cell 3. The test parameters and configurations are given in Tables A.4.6.1.8.1-1, A.4.6.1.8.1-2, and A.4.6.1.8.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A6 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.1.8.1-1.

Table A.4.6.1.8.1-1: Supported PCell and PSCell configurations in EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used for UE configured with *highSpeedMeasCA-Scell-r17*

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one of the supported test configurations with the smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW _{channel}) defined in each test configuration

Table 4.6.1.8.4.1-1A: Supported SCell test configurations in EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used for UE configured with *highSpeedMeasCA-Scell-r17*

Config _{Scell}	Description
1A	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2A	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3A	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations.
Note 2:	The UE is only required to be tested in one of the supported test configurations with the smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW _{channel}) defined in each test configuration.
Note 3:	NR Cell 4 has the same SCS, BW and duplex mode as NR Cell 3.

Table A.4.6.1.8.1-2: General test parameters for EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used for UE configured with *highSpeedMeasCA-Scell-r17*

Parameter	Unit	Test configuration	Value	Comment
highSpeedMeasCA-Scell-r17		Config 1,2,3,4,5,6	Present	To enable high speed measurement enhancements
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1	One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2	Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Deactivated Scell		Config 1A,2A,3A	NR cell 3	NR cell 3 is on NR RF channel number 2.
Neighbour cell		Config 1A,2A,3A	NR cell 4	NR cell 4 is on NR RF channel number 2.
A6-Offset	dB	Config 1,2,3,4,5,6	-4.5	
Hysteresis	dB	Config 1,2,3,4,5,6	0	
CP length		Config 1,2,3,4,5,6	Normal	
Measurement gap pattern Id			OFF	
SCell measurement cycle (measCycleSCell)		Config 1,2,3,4,5,6	160 ms	
TimeToTrigger	s	Config 1,2,3,4,5,6	0	
Filter coefficient		Config 1,2,3,4,5,6	0	As specified in clause A.3.3
DRX		Config 1,2,3,4,5,6	DRX.14	

Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μ s	Synchronous EN-DC
Time alignment error between cell2 and cell3	μ s	$\leq$ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.	Time alignment error between cell2 and cell3
Time offset between serving l and neighbour cells		Config 1,4	3 ms	Asynchronous cells. The timing of Cell 4 is 3ms later than the timing of Cell 3.
		Config 2,3,5,6	3 μ s	Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5	
T2	s	Config 1,2,3,4,5,6	1	

Table A.4.6.1.8.1-3: Cell specific test parameters for EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used for UE configured with *highSpeedMeasCA-Scell-r17*

Parameter	Unit	Test configuration	Cell 2		Cell 3		Cell 4	
			T1	T2	T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6,1A,2A,3A	1		2		2	
Duplex mode		Config 1,4,1A	FDD				FDD	
		Config 2,3,5,6,2A,3A	TDD				TDD	
BW _{channel}	MHz	Config 1,4,1A	10: N _{RB,c} = 52				10: N _{RB,c} = 52	
		Config 2,5,2A	10: N _{RB,c} = 52				10: N _{RB,c} = 52	
		Config 3,6,3A	40: N _{RB,c} = 106				40: N _{RB,c} = 106	
BWP BW	MHz	Config 1,4,1A	10: N _{RB,c} = 52				10: N _{RB,c} = 52	
		Config 2,5,2A	10: N _{RB,c} = 52				10: N _{RB,c} = 52	
		Config 3,6,3A	40: N _{RB,c} = 106				40: N _{RB,c} = 106	
TDD configuration		Config 2,5,2A	TDDConf.1.1		TDDConf.1.1		TDDConf.1.1	
		Config 3,6,3A	TDDConf.2.1		TDDConf.2.1		TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6,1A,2A,3A	DLBWP.0.1		DLBWP.0.1		DLBWP.0.1	
Initial UL BWP		Config 1,2,3,4,5,6,1A,2A,3A	ULBWP.0.1		NA		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6,1A,2A,3A	DLBWP.1.1		DLBWP.1.1		DLBWP.1.1	
Dedicated UL BWP		Config 1,2,3,4,5,6,1A,2A,3A	ULBWP.1.1		NA		NA	
TRS configuration		Config 1,4,1A	TRS.1.1 FDD		NA		NA	
		Config 2,5,2A	TRS.1.1 TDD		NA		NA	
		Config 3,6,3A	TRS.1.2 TDD		NA		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6, ,1A,2A,3A	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4,1A	SR.1.1 FDD		SR.1.1 FDD		SR.1.1 FDD	
		Config 2,5,2A	SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
		Config 3,6,3A	SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4,1A	CR.1.1 FDD		CR.1.1 FDD		CR.1.1 FDD	
		Config 2,5,2A	CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
		Config 3,6,3A	CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
		Config 1,4,1A	CCR.1.1 FDD		CCR.1.1 FDD		CCR.1.1 FDD	

Dedicated CORESET Reference Channel		Config 2,5,2A	CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD
		Config 3,6,3A	CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
SSB parameters		Config 1,4,1A	SSB.1 FR1	SSB.5 FR1	SSB.5 FR1	SSB.5 FR1	SSB.5 FR1
		Config 2,5,2A	SSB.1 FR1	SSB.5 FR1	SSB.5 FR1	SSB.5 FR1	SSB.5 FR1
		Config 3,6,3A	SSB.2 FR1	SSB.6 FR1	SSB.6 FR1	SSB.6 FR1	SSB.6 FR1
SMTC configuration defined in A.3.11		Config 1,4,1A	SMTC.2	SMTC.5	SMTC.5	SMTC.5	SMTC.5
		Config 2,3,5,6,2A,3A	SMTC.1	SMTC.4	SMTC.4	SMTC.4	SMTC.4
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5,1A,2A	15				
		Config 3,6,3A	30				
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6,1A,2A,3A	0	0	0		
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}	dBm/15kHz		-98	-98	-98	-98	-98
N_{oc}^{Note2}	dBm/SCS	Config 1,2,4,5,1A,2A	-98	-98	-98	-98	-98
		Config 3,6,3A	-95	-95	-95	-95	-95
SS-RSRP ^{Note 3}	dBm/SCS	Config 1,2,4,5,1A,2A	-94	-94	-94	-94	-Infinity
		Config 3,6,3A	-91	-91	-91	-91	-Infinity
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6,1A,2A,3A	4	4	4	-1.46	-Infinity
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6,1A,2A,3A	4	4	4	4	-Infinity
I_{ot}^{Note3}	dBm/9.36 MHz	Config 1,2,4,5,1A,2A	-64.59	-64.59	-64.59	-62.26	-64.59
	dBm/38.16 MHz	Config 3,6,3A	-58.49	-58.49	-58.49	-56.15	-58.49
Propagation Condition		Config 1,2,4,5,1A,2A	AWGN	AWGN	AWGN	AWGN 1944Hz ^{Note 5}	AWGN 1944Hz ^{Note 5}
		Config 3,6,3A	AWGN	AWGN	AWGN	AWGN 3334Hz ^{Note 6}	AWGN 3334Hz ^{Note 6}

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944Hz.
Note 6:	The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334Hz.

A.4.6.1.8.2 Test Requirements

The UE shall send one Event A6 triggered measurement report, with a measurement reporting delay less than 1600 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.2 Inter-frequency Measurements

A.4.6.2.1 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is not used

A.4.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.4.6.2.1.1-1, A.4.6.2.1.1-2, and A.4.6.2.1.1-3.

Measurement gap pattern configuration is defined in Table A.4.6.2.1.1-2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.2.1.1-1.

Table A.4.6.2.1.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Note 1: The UE is only required to be tested in one of the supported test configurations

Note 2: target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2

Table A.4.6.2.1.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1	One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3	NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0 4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9	
A3-Offset	dB	Config 1,2,3,4,5,6	-6	
Hysteresis	dB	Config 1,2,3,4,5,6	0	
CP length		Config 1,2,3,4,5,6	Normal	
TimeToTrigger	s	Config 1,2,3,4,5,6	0	
Filter coefficient		Config 1,2,3,4,5,6	0	L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF	DRX is not used
Time offset between PCell and PScell		Config 1,2,3,4,5,6	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3 μ s	Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5	
T2	s	Config 1,2,3,4,5,6	1	

Table A.4.6.2.1.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD			
		Config 2,3,5,6	TDD			
BW _{channel}	MHz	Config 1,4	10: N _{RB,C} = 52			
		Config 2,5	10: N _{RB,C} = 52			
		Config 3,6	40: N _{RB,C} = 106			

BWP BW	MHz	Config 1,4	10: $N_{RB,c} = 52$			
		Config 2,5	10: $N_{RB,c} = 52$			
		Config 3,6	40: $N_{RB,c} = 106$			
TDD configuration		Config 2,5	TDDConf.1.1		TDDConf.1.1	
		Config 3,6	TDDConf.2.1		TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
TRS configuration		Config 1,4	TRS.1.1 FDD		NA	
		Config 2,5	TRS.1.1 TDD		NA	
		Config 3,6	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		-	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		-	
		Config 2,5	CCR.1.1 TDD			
		Config 3,6	CCR.2.1 TDD			
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1	
		Config 2,5	SSB.1 FR1		SSB.5 FR1	
		Config 3,6	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2		SMTC.5	
		Config 2,3,5,6	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15			
		Config 3,6	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15k Hz		-98		-98	
N_{oc}^{Note2}	dBm/SC S	Config 1,2,4,5	-98		-98	
		Config 3,6	-95		-95	
SS-RSRP ^{Note 3}	dBm/SC S	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88

$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io ^{Note3}	dBm/9.36 MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.1 6MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

A.4.6.2.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.2.2 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used

A.4.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.4.6.2.2.1-1, A.4.6.2.2.1-2, and A.4.6.2.2.1-3.

Measurement gap pattern configuration is defined in Table A.4.6.2.2.1-2..

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.2.2.1-1.

UE needs to be provided with new Timing Advance Command MAC control at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.2.2.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2	

Table A.4.6.2.2.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0 4		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9		
A3-Offset	dB	Config 1,2,3,4,5,6	-6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX	ms	Config 1,2,3,4,5,6	DRX.1	DRX. 7	As specified in clause A.3.3
Time offset between PCell and PScell		Config 1,2,3,4,5,6	3 μ s		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3 μ s		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	1.1	11	
T2	s	Config 1,2,3,4,5,6	1.1	11	

Table A.4.6.2.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD			
		Config 2,3,5,6	TDD			
BW _{channel}	MHz	Config 1,4	10: N _{RB,c} = 52			
		Config 2,5	10: N _{RB,c} = 52			
		Config 3,6	40: N _{RB,c} = 106			
BWP BW	MHz	Config 1,4	10: N _{RB,c} = 52			
		Config 2,5	10: N _{RB,c} = 52			
		Config 3,6	40: N _{RB,c} = 106			
TDD configuration		Config 2,5	TDDConf.1.1			
		Config 3,6	TDDConf.2.1			
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
TRS configuration		Config 1,4	TRS.1.1 FDD		NA	
		Config 2,5	TRS.1.1 TDD		NA	
		Config 3,6	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		-	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		-	
		Config 2,5	CCR.1.1 TDD			
		Config 3,6	CCR.2.1 TDD			
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1	
		Config 2,5	SSB.1 FR1		SSB.5 FR1	
		Config 3,6	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2		SMTC.5	
		Config 2,3,5,6	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15			
		Config 3,6	30			
EPRE ratio of PSS to SSS						
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						

EPRE ratio of PDCCH to PDCCH DMRS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15kHz z		-98		-98	
N_{oc}^{Note2}	dBm/SCS	Config 1,2,4,5	-98		-98	
		Config 3,6	-95		-95	
SS-RSRP ^{Note 3}	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
Io ^{Note3}	dBm/9.36 MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.16 MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

A.4.6.2.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.2.3 Void

A.4.6.2.4 Void

A.4.6.2.5 EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is not used

A.4.6.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.4.6.2.5.1-1, A.4.6.2.5.1-2, and A.4.6.2.5.1-3.

Measurement gap pattern configuration is defined in Table A.4.6.2.5.1-2..

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.2.5.1-1.

Table A.4.6.2.5.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2	

Table A.4.6.2.5.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1	One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3	NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9	

A3-Offset	dB	Config 1,2,3,4,5,6	-6	
Hysteresis	dB	Config 1,2,3,4,5,6	0	
CP length		Config 1,2,3,4,5,6	Normal	
TimeToTrigger	s	Config 1,2,3,4,5,6	0	
Filter coefficient		Config 1,2,3,4,5,6	0	L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF	DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3 μ s	Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5	
T2	s	Config 1,2,3,4,5,6	1.1	

Table A.4.6.2.5.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD			
		Config 2,3,5,6	TDD			
BW _{channel}	MHz	Config 1,4	10: N _{RB,c} = 52			
		Config 2,5	10: N _{RB,c} = 52			
		Config 3,6	40: N _{RB,c} = 106			
BWP BW	MHz	Config 1,4	10: N _{RB,c} = 52			
		Config 2,5	10: N _{RB,c} = 52			
		Config 3,6	40: N _{RB,c} = 106			
TDD configuration		Config 2,5	TDDConf.1.1			
		Config 3,6	TDDConf.2.1			
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
TRS configuration		Config 1,4	TRS.1.1 FDD		NA	
		Config 2,5	TRS.1.1 TDD		NA	
		Config 3,6	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference		Config 1,4	SR.1.1 FDD			

measurement channel		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR.2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		-	
		Config 2,5	CCR.1.1 TDD			
		Config 3,6	CCR.2.1 TDD			
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1	
		Config 2,5	SSB.1 FR1		SSB.5 FR1	
		Config 3,6	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2		SMTC.5	
		Config 2,3,5,6	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15			
		Config 3,6	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15 kHz		-98		-98	
N_{oc}^{Note2}	dBm/S CS	Config 1,2,4,5	-98		-98	
		Config 3,6	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
I_o^{Note3}	dBm/9.36MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.4.6.2.5.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.2.6 EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is used

A.4.6.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.4.6.2.6.1-1, A.4.6.2.6.1-2, and A.4.6.2.6.1-3.

Measurement gap pattern configuration is defined in Table A.4.6.2.6.1-2.

.

.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.2.6.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.2.6.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2	

Table A.4.6.2.6.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9		
A3-Offset	dB	Config 1,2,3,4,5,6	-6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX	ms	Config 1,2,3,4,5,6	DRX.1	DRX. 7	As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μ s		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3 μ s		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	1.3	13.5	

Table A.4.6.2.6.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	

Duplex mode		Config 1,4	FDD	
		Config 2,3,5,6	TDD	
BW _{channel}	MHz	Config 1,4	10: N _{RB,c} = 52	
		Config 2,5	10: N _{RB,c} = 52	
		Config 3,6	40: N _{RB,c} = 106	
BWP BW	MHz	Config 1,4	10: N _{RB,c} = 52	
		Config 2,5	10: N _{RB,c} = 52	
		Config 3,6	40: N _{RB,c} = 106	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1	OP.1
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD	-
		Config 2,5	SR.1.1 TDD	
		Config 3,6	SR2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD	-
		Config 2,5	CR.1.1 TDD	
		Config 3,6	CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD	-
		Config 2,5	CCR.1.1 TDD	
		Config 3,6	CCR.2.1 TDD	
TDD configuration		Config 2,5	TDDConf.1.1	
		Config 3,6	TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1	
TRS configuration		Config 1,4	TRS.1.1 FDD	N/A
		Config 2,5	TRS.1.1 TDD	N/A
		Config 3,6	TRS.1.2 TDD	N/A
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1	
SSB parameters		Config 1,4	SSB.1 FR1	
		Config 2,5	SSB.1 FR1	
		Config 3,6	SSB.2 FR1	
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2	
		Config 2,3,5,6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15	
		Config 3,6	30	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				

N_{oc} ^{Note2}	dBm/15 kHz		-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2,4,5	-98		-98	
		Config 3,6	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.4.6.2.6.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2, UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.2.7 Void

A.4.6.2.8 Void

A.4.6.2.9 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used for UE configured with highSpeedMeasInterFreq-r17

A.4.6.2.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event for UE configured with highSpeedMeasInterFreq-r17. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.4.6.2.9.1-1, A.4.6.2.9.1-2, and A.4.6.2.9.1-3.

Measurement gap pattern configuration is defined in Table A.4.6.2.9.1-2. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.2.9.1-1.

UE needs to be provided with new Timing Advance Command MAC control at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.4.6.2.9.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1 for UE configured with highSpeedMeasInterFreq-r17

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2	

Table A.4.6.2.9.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection for UE configured with highSpeedMeasInterFreq-r17

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1	One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3	NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0 4	As specified in clause 9.1.2-1.

Measurement gap offset		Config 1,2,3,4,5,6	9	
A3-Offset	dB	Config 1,2,3,4,5,6	-6	
Hysteresis	dB	Config 1,2,3,4,5,6	0	
CP length		Config 1,2,3,4,5,6	Normal	
TimeToTrigger	s	Config 1,2,3,4,5,6	0	
Filter coefficient		Config 1,2,3,4,5,6	0	L3 filtering is not used
DRX	ms	Config 1,2,3,4,5,6	DRX.14	As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3 μ s	Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5	
T2	s	Config 1,2,3,4,5,6	3	

Table A.4.6.2.9.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection for UE configured with highSpeedMeasInterFreq-r17

Parameter	Unit	Test configurat ion	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD			
		Config 2,3,5,6	TDD			
BW _{channel}	MHz	Config 1,4	10: N _{RB,c} = 52			
		Config 2,5	10: N _{RB,c} = 52			
		Config 3,6	40: N _{RB,c} = 106			
BWP BW	MHz	Config 1,4	10: N _{RB,c} = 52			
		Config 2,5	10: N _{RB,c} = 52			
		Config 3,6	40: N _{RB,c} = 106			
TDD configuration		Config 2,5	TDDConf.1.1			
		Config 3,6	TDDConf.2.1			
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
TRS configuration		Config 1,4	TRS.1.1 FDD		NA	
		Config 2,5	TRS.1.1 TDD		NA	
		Config 3,6	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference		Config 1,4	SR.1.1 FDD		-	

measurement channel		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		-	
		Config 2,5	CCR.1.1 TDD			
		Config 3,6	CCR.2.1 TDD			
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1	
		Config 2,5	SSB.1 FR1		SSB.5 FR1	
		Config 3,6	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2		SMTC.5	
		Config 2,3,5,6	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15			
		Config 3,6	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15kHz		-98		-98	
N_{oc}^{Note2}	dBm/SCS	Config 1,2,4,5	-98		-98	
		Config 3,6	-95		-95	
SS-RSRP ^{Note 3}	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
I_o^{Note3}	dBm/9.36 MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.16 MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,4,5	AWGN		AWGN 1944Hz ^{Note 5}	
		Config 3,6			AWGN 3334Hz ^{Note 6}	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944Hz.
Note 6:	The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334Hz.

A.4.6.2.9.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 2240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.3 Void

A.4.6.4 L1-RSRP measurement for beam reporting

A.4.6.4.1 SSB based L1-RSRP measurement when DRX is not used

A.4.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.4.6.4.1.1-1.

Table A.4.6.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations

A.4.6.4.1.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.4.1.2-1 and Table A.4.6.4.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.4.6.4.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2,5		10: N _{RB,c} = 52
	3,6		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
DRX configuration	1~6		Off
reportConfigType	1~6		periodic
reportQuantity	1~6		ssb-Index-RSRP
Number of reported RS	1~6		2
L1-RSRP reporting period	1~6	slot	80
T1	1~6	s	5
T2	1~6	s	1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			

EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.4.6.4.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} ^{Note2}	1~6	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1,2,4,5	dBm/SSB SCS	-94.65			
	3,6		-91.65			
$\hat{E}_s / I_{ot}$	1~6	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1,2,4,5	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3,6		-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1,2,4,5	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3,6	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1~6	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.4.6.4.1.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.4.2 SSB based L1-RSRP measurement when DRX is used

A.4.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.4.6.4.2.1-1.

Table A.4.6.4.2.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.4.2.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.4.2.2-1 and Table A.4.6.4.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.4.6.4.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2,5		10: N _{RB,c} = 52
	3,6		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD

	3,6		TRS.1.2 TDD
DRX configuration	1~6		DRX.3
reportConfigType	1~6		periodic
reportQuantity	1~6		ssb-Index-RSRP
Number of reported RS	1~6		2
L1-RSRP reporting period	1~6	slot	80
T1	1~6	s	5
T2	1~6	s	1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.4.6.4.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} ^{Note2}	1~6	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1,2,4,5	dBm/SSB SCS	-94.65			
	3,6		-91.65			
$\hat{E}_s / I_{ot}$	1~6	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1,2,4,5	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3,6		-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1,2,4,5	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3,6	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1~6	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.4.6.4.2.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.4.3 CSI-RS based L1-RSRP measurement when DRX is not used

A.4.6.4.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.4.6.4.3.1-1.

Table A.4.6.4.3.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.4.3.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.4.3.2-1 and Table A.4.6.4.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2,4,5 and 8 for Config 3,6) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.4.6.4.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.4.6.4.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52

	2,5		10: $N_{RB,c} = 52$
	3,6		40: $N_{RB,c} = 106$
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
CSI-RS configuration	1,4		CSI-RS 1.3 FDD
	2,5		CSI-RS 1.3 TDD
	3,6		CSI-RS 2.3 TDD
OCNG Patterns	1~6		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
DRX configuration	1~6		Off
reportConfigType	1~6		aperiodic
reportQuantity	1~6		cri-RSRP
Number of reported RS	1~6		2
qcl-Info	1~6		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1~6	slots	8
T1	1~6	s	5
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.4.6.4.3.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} ^{Note1}	1~6	dBm/15kHz	-94.65	

N_{oc} ^{Note1}	1,2,4,5	dBm/SSB SCS	-94.65	
	3,6		-91.65	
$\hat{E}_s / I_{ot}$	1~6	dB	0	3
CSI-RS RSRP ^{Note2}	1,2,4,5	dBm/SSB SCS	-94.65	-91.65
	3,6		-91.65	-88.65
I_o ^{Note2}	1,2,4,5	dBm/9.36 MHz	-63.69	-61.93
	3,6	dBm/38.16 MHz	-57.59	-55.84
$\hat{E}_s / N_{oc}$	1~6	dB	0	3
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.4.6.4.3.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.20.1.1 and relative accuracy requirement in clause 10.1.20.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.4.4 CSI-RS based L1-RSRP measurement when DRX is used

A.4.6.4.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.4.6.4.4.1-1.

Table A.4.6.4.4.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.4.4.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.4.4.2-1 and Table A.4.6.4.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2,4,5 and 8 for Config 3,6) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.4.6.4.4.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.4.6.4.4.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2,5		10: N _{RB,c} = 52
	3,6		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
CSI-RS configuration	1,4		CSI-RS 1.3 FDD
	2,5		CSI-RS 1.3 TDD
	3,6		CSI-RS 2.3 TDD
OCNG Patterns	1~6		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTc configuration	1~6		SMTc.1
DRX configuration	1~6		DRX.3
reportConfigType	1~6		aperiodic
reportQuantity	1~6		cri-RSRP
Number of reported RS	1~6		2
qcl-Info	1~6		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~6	slots	8
T1	1~6	s	5
EPRE ratio of PSS to SSS			
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			

EPRE ratio of PDCCH to PDCCH DMRS	1~6	dB	0
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.4.6.4.4.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} ^{Note1}	1~6	dBm/15kHz	-94.65	
N_{oc} ^{Note1}	1,2,4,5	dBm/SSB SCS	-94.65	
	3,6		-91.65	
$\hat{E}_s / I_{ot}$	1~6	dB	0	3
CSI-RS RSRP ^{Note2}	1,2,4,5	dBm/SSB SCS	-94.65	-91.65
	3,6		-91.65	-88.65
I_o ^{Note2}	1,2,4,5	dBm/9.36 MHz	-63.69	-61.93
	3,6	dBm/38.16 MHz	-57.59	-55.84
$\hat{E}_s / N_{oc}$	1~6	dB	0	3
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.4.6.4.4.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting absolute accuracy requirement in clause 10.1.20.1.1 and relative accuracy requirement in clause 10.1.20.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.4.5 SSB based L1-RSRP measurement when DRX is used for UE configured with *highSpeedMeasFlag-r16*

A.4.6.4.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement when UE is configured with *highSpeedMeasFlag-r16*. This test will partly verify the L1-RSRP measurement requirements for UE configured with *highSpeedMeasFlag-r16* in clause 9.5.4.1, with the testing configurations for NR cells in Table A.4.6.4.5.1-1.

Table A.4.6.4.5.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.4.5.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.4.5.2-1 and Table A.4.6.4.5.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.4.6.4.5.2-1: General test parameters for UE configured with *highSpeedMeasFlag-r16*

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2,5		10: N _{RB,c} = 52
	3,6		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1

SMTC configuration	1~6		SMTC.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
DRX configuration	1~6		DRX.3
reportConfigType	1~6		periodic
reportQuantity	1~6		ssb-Index-RSRP
Number of reported RS	1~6		2
L1-RSRP reporting period	1~6	slot	80
T1	1~6	s	5
T2	1~6	s	2
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.4.6.4.5.2-2: SSB specific test parameters for UE configured with *highSpeedMeasFlag-r16*

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} ^{Note2}	1~6	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1,2,4,5	dBm/SSB SCS	-94.65			
	3,6		-91.65			
$\hat{E}_s/I_{ot}$	1~6	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1,2,4,5	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3,6		-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1,2,4,5	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3,6	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s/N_{oc}$	1~6	dB	0	0	-Infinity	3
Propagation condition	1,2,4,5		AWGN		AWGN 1944Hz	
	3,6		AWGN		AWGN 3334Hz	
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.4.6.4.5.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.5 CLI measurements

A.4.6.5.1 SRS-RSRP measurement with non-DRX

A.4.6.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of SRS-RSRP measurement. This test will verify the SRS-RSRP measurement requirements in clause 9.7.2.5 with the testing configurations for NR cells in Table A.4.6.5.1.1-1.

Table A.4.6.5.1.1-1: Applicable NR configurations for FR1 SRS-RSRP test

Configuration	Description
1	NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
2	NR 30 kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.5.1.2 Test Parameters

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters for PSCell is given in Table A.4.6.5.1.2-1 and A.4.6.5.1.2-2 below and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system transmits SRS resource for measurement in the DL slot according to the SRS configuration in Table A.4.6.5.1.2-4 and the test parameters for the (virtual) neighbour cell UE in Table A.4.6.5.1.2-3. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 1 data symbol before SRS to be transmitted.

Table A.4.6.5.1.2-1: General test parameters for SRS-RSRP event triggered reporting for PSCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	E-UTRAN Cell 1 and NR Cell 2	
RF Channel Number		1, 2	1: Cell 1 2: Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.2 FR1	
SMTC configuration		1	SMTC.1	
		2	SMTC.1	
SRS configuration		1	SRSCnf.1	Table A.4.6.5.1.2-3
		2	SRSCnf.2	
CP length		1, 2	Normal	
i1-Threshold	dBm	1	-97	
		2	-95	
Hysteresis	dB	1, 2	0	

Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	Non-DRX
Time offset between DL from serving cell and SRS from test system	μ s	1,2	17.67	
T1	s	1, 2	5	
T2	s	1, 2	1	

Table A.4.6.5.1.2-2: NR Cell specific test parameters for SRS-RSRP event triggered reporting for PSCell in FR1

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
TDD configuration		1	TDDConf.1.1	
		2	TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 TDD	
		2	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 TDD	
		2	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 TDD	
		2	CCR.2.1 TDD	
OCNG Patterns		1, 2	OP.1	
TRS Configuration		1	TRS.1.1 TDD	
		2	TRS.1.2 TDD	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1	
N_{oc} Note 2	dBm/15 kHz	1	-98	
		2		
N_{oc} Note 2	dBm/SCS	1	-98	
		2	-95	
Propagation Condition		1, 2	AWGN	
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				

Table A.4.6.5.1.2-3: NR Cell specific test parameters for SRS-RSRP event triggered reporting for neighbour cell UE

Parameter	Unit	Test configuration	Neighbour cell UE	
			T1	T2
N_{oc} Note 2	dBm/15 kHz	1	-98	
		2		
N_{oc} Note 2	dBm/SCS	1	-98	
		2	-95	
$\hat{E}_s/I_{ot}$	dB	1	-infinity	4
		2		

$\hat{E}_s / N_{oc}$	dB	1	-infinity	4
		2		
SRS-RSRP ^{Note 3}	dBm/SCS kHz	1	-infinity	-94
		2	-infinity	-91
Io	dBm/9.36 MHz	1	-70.05	-64.59
	dBm/38.16 MHz	2	-63.96	-58.50
Propagation Condition		1, 2	AWGN	
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Table A.4.6.5.1.2-4: SRS configuration for measurement reporting

	Field	SRSCConf.1	SRSCConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	12	12	
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset	sl20, 9	sl40, 19	
	sequenceId	0	0	Any 10 bit number

A.4.6.5.1.3 Test Requirements

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 60 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.5.2 CLI-RSSI measurement with non-DRX

A.4.6.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of CLI-RSSI measurement. This test will verify the CLI-RSSI measurement requirements in clause 9.7.3.5 with the testing configurations for NR cells in Table A.4.6.5.2.1-1.

Table A.4.6.5.2.1-1: Applicable NR configurations for FR1 CLI-RSSI test

Configuration	Description
1	NR 15 kHz SCS, 10 MHz bandwidth, TDD duplex mode
2	NR 30 kHz SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.5.2.2 Test Parameters

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters for PSCell is given in Table A.4.6.5.2.2-1 and A.4.6.5.2.2-2 below and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI measurement resource and on 1 data symbol before. The CLI-RSSI measurement resource configuration is in Table A.4.6.5.2.2-3.

Table A.4.6.5.2.2-1: General test parameters for CLI-RSSI event triggered reporting for PSCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	E-UTRAN Cell 1 and NR Cell 2	
RF Channel Number		1, 2	1: Cell 1 2: Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.2 FR1	
SMTC configuration		1	SMTC.1	
		2	SMTC.1	
CLI-RSSI configuration		1	CLI-RSSIConf.1	Table A.4.6.5.2.2-3
		2	CLI-RSSIConf.2	
CP length		1, 2	Normal	
i1-Threshold	dBm	1	-93	
		2	-93	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	Non-DRX
Time offset between DL from serving cell and OCNG from test system	μs	1,2	17.67	
T1	s	1, 2	5	
T2	s	1, 2	1	

Table A.4.6.5.2.2-2: NR Cell specific test parameters for CLI-RSSI event triggered reporting for PSCell in FR1

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
TDD configuration		1	TDDConf.1.1	
		2	TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 TDD	
		2	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 TDD	
		2	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 TDD	
		2	CCR.2.1 TDD	
OCNG Patterns ^{Note 3}		1, 2	OP.1	
TRS Configuration		1	TRS.1.1 TDD	
		2	TRS.1.2 TDD	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1	
N_{oc} on CLI-RSSI measurement resource ^{Note 2}	dBm/15 kHz	1	-116	-108
		2		
N_{oc} on CLI-RSSI measurement resource ^{Note 2}	dBm/SCS	1	-116	-108
		2	-113	-105
Io on CLI-RSSI measurement resource	dBm/9.36 MHz	1	-88.05	-80.05
	dBm/38.16 MHz	2	-81.96	-74.00
Io on CLI-RSSI measurement resource	dBm/1.08 MHz	1	-97.43	-89.43
	dBm/1.08 MHz	2	-97.44	-89.44
Propagation Condition		1, 2	AWGN	
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	OCNG is not transmitted in the CLI-RSSI measurement resources.			

Table A.4.6.5.2.2-3: CLI-RSSI measurement resource configuration for measurement reporting

	Field	CLI-RSSICnf.1	CLI-RSSICnf.2
RSSI-Resource	rssi-ResourceId	0	0
	rssi-SCS	15	30
	startPRB	0	0
	nrofPRBs	52	106
	startPosition	3	3
	nrofSymbols	11	11
	rssi-PeriodicityAndOffset	sl20, 9	sl40, 19

A.4.6.5.2.3 Test Requirements

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 20 ms from the beginning of time period T2. The nominal RSSI used to evaluate the requirement shall be based on Io.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.6 Measurements with autonomous gaps

A.4.6.6.1 EN-DC-intra-frequency CGI identification of NR FR1 cell with autonomous gaps in synchronous EN-DC

A.4.6.6.1.1 Test Purpose and Environment

The purpose of this test is to verify the requirements for intra-frequency identification of a new CGI of NR FR1 cell with autonomous gaps in clause 9.11 for EN-DC.

The test scenario comprises of one E-UTRA carrier and one NR FR1 carrier. Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1) on E-UTRA RF channel 1, NR FR1 PSCell (Cell 2) and NR FR1 neighbour cell (Cell 3) on NR RF channel 1. The supported test configurations are shown in table A.4.6.6.1.1-1 below. The test parameters for NR Cells are given in Table A.4.6.6.1.2-2, A.4.6.6.1.2-3 below. The test parameters and applicability for the E-UTRAN PCell are defined in A.3.7.2.1. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 3. Starting T2, Cell 3 becomes detectable and the UE is expected to detect and send a measurement report.

An RRC message implying SI reading shall be sent to the UE during period T2, after the UE has reported Event A3. The RRC message shall create a measurement report configuration with purpose *reportCGI* which *cellForWhichToReportCGI* set to the physical cell identity of Cell 3. The start of T3 is the instant when the last TTI containing the RRC message implying SI reading of the neighbour cell (Cell 3) using autonomous gap is sent to the UE.

Table A.4.6.6.1.1-1: intra-frequency CGI identification of NR FR1 cell with autonomous gaps in synchronous EN-DC

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.6.1.1-2: General test parameters for intra-frequency CGI identification of NR FR1 cell with autonomous gaps in synchronous EN-DC

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1	One E-UTRAN radio channel is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1	One NR FR1 radio channel is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR Cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.

Neighbour cell		Config 1,2,3,4,5,6	NR Cell 3	NR Cell 3 is on NR RF channel number 1.
A3-Offset	dB	Config 1,2,3,4,5,6	-4.5	
Hysteresis	dB	Config 1,2,3,4,5,6	0	
CP length		Config 1,2,3,4,5,6	Normal	
TimeToTrigger	s	Config 1,2,3,4,5,6	0	
Filter coefficient		Config 1,2,3,4,5,6	0	L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF	DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3 μ s	Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5	
T2	s	Config 1,2,3,4,5,6	≤ 10	
T3	s	Config 1,2,3,4,5,6	5	

Table A.4.6.6.1.1-3: Cell specific test parameters for intra-frequency CGI identification of NR FR1 cell with autonomous gaps in synchronous EN-DC

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
Duplex mode		Config 1,4	FDD			
		Config 2,3,5,6	TDD			
BW _{channel}	MHz	Config 1,4	10: N _{RB,c} = 52			
		Config 2,5	10: N _{RB,c} = 52			
		Config 3,6	40: N _{RB,c} = 106			
BWP BW	MHz	Config 1,4	10: N _{RB,c} = 52			
		Config 2,5	10: N _{RB,c} = 52			
		Config 3,6	40: N _{RB,c} = 106			
TDD configuration		Config 1,4	N/A		N/A	
		Config 2,5	TDDConf.1.1		TDDConf.1.1	
		Config 3,6	TDDConf.2.1		TDDConf.2.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
TRS configuration		Config 1,4	TRS.1.1 FDD		NA	
		Config 2,5	TRS.1.1 TDD			
		Config 3,6	TRS.1.2 TDD			
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		NA	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		NA	
		Config 2,5	CR.1.1 TDD		NA	
		Config 3,6	CR 2.1 TDD		NA	

RMC CORESET Reference Channel		Config 1, 4	CCR.1.1 FDD		NA	
		Config 2, 5	CCR.1.1 TDD		NA	
		Config 3, 6	CCR.2.1 TDD		NA	
SSB parameters		Config 1,2,4,5	SSB.1 FR1			
		Config 3,6	SSB.2 FR1			
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2			
		Config 2,3,5,6	SMTC.1			
RMSI scheduling periodicity	ms	Config 1,2,3,4,5,6	20ms			
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15			
		Config 3,6	30			
RLM-RS		Config 1,2,3,4,5,6	SSB		SSB	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0	0		
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15 kHz		-98		-98	
N_{oc}^{Note2}	dBm/S CS	Config 1,2,4,5	-98		-98	
		Config 3,6	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2,4,5	-94	-94	-Infinity	-94
		Config 3,6	-91	-91	-Infinity	-91
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	4
I_o^{Note3}	dBm/9. 36MHz	Config 1,2,4,5	-64.60	-62.25	-64.60	-62.25
	dBm/38 .16MHz	Config 3,6	-58.50	-56.16	-58.50	-56.16
Propagation Condition		Config 1,2,3,4,5,6	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

A.4.6.6.1.2 Test Requirements

The UE shall transmit a measurement report containing the cell global identifier of Cell 3 within 260 ms from the start of T3.

Test requirement = RRC Procedure delay + $T_{\text{identify_CGL_NR}}$ + TTI insertion uncertainty

$$= 15 + 240 + 2$$

$$= 257 \text{ ms, allow } 260 \text{ ms.}$$

The UE shall be scheduled continuously throughout the test, and from the start of T3 until 260 ms the number of interrupted slots shall not exceed the allowed number specified in 8.2.1.2.16.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.7 L1-SINR measurement for beam reporting

A.4.6.7.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR when DRX is not used

A.4.6.7.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement based on CSI-RS CMR without dedicated IMR. This test will partly verify the L1-SINR measurement requirements in clause 9.8.4.1, with the testing configurations for NR cells in Table A.4.6.7.1.1-1.

Table A.4.6.7.1.1-1: Applicable NR configurations for FR1 CSI-RS based L1-SINR test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.7.1.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.7.1.2-1 and Table A.4.6.7.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. After 80ms from the beginning of the test, the DCI trigger comes in slot n (1 Config 1,2,4,5 and 8 for Config 3,6) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.4.6.7.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.4.6.7.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD

	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2,5		10: N _{RB,c} = 52
	3,6		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
CSI-RS configuration	1,4		CSI-RS.1.3 FDD
	2,5		CSI-RS.1.3 TDD
	3,6		CSI-RS.2.3 TDD
OCNG Patterns	1~6		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTc configuration	1~6		SMTc.1
DRX configuration	1~6		Off
reportConfigType	1~6		aperiodic
reportQuantity-r16	1~6		cri-SINR-r16
Number of reported RS	1~6		2
qcl-Info	1~6		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~6	slots	26
T1	1~6	s	5
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~6		AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
---------	---

Table A.4.6.7.1.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} ^{Note1}	1~6	dBm/15kHz	-94.65	
N_{oc} ^{Note1}	1,2,4,5	dBm/SSB SCS	-94.65	
	3,6		-91.65	
$\hat{E}_s/I_{ot}$	1~6	dB	0	3
CSI-RS RSRP ^{Note3}	1,2,4,5	dBm/SSB SCS	-94.65	-91.65
	3,6		-91.65	-88.65
I_o ^{Note2}	1,2,4,5	dBm/9.36 MHz	-63.69	-61.93
	3,6	dBm/38.16 MHz	-57.59	-55.84
$\hat{E}_s/N_{oc}$	1~6	dB	0	3
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.4.6.7.1.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.27.1.1 and relative accuracy requirement in clause 10.1.27.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.4.6.7.2 L1-SINR measurement with SSB based CMR and dedicated IMR when DRX is used

A.4.6.7.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements with SSB based CMR and CSI-IM based IMR in clause 9.8.4.2, with the testing configurations for NR cells in Table A.4.6.7.2.1-1.

Table A.4.6.7.2.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with SSB based CMR and CSI-IM based IMR

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.7.2.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.7.2.2-1 and Table A.4.6.7.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the SSBs and the associated CSI-IM resources, and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD measurements based on the SSBs, and UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-IM resources as IMR.

Table A.4.6.7.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
	3,6		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2,5		10: N _{RB,c} = 52
	3,6		40: N _{RB,c} = 106
	3,6		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.3 FR1
	3,6		SSB.4 FR1
CSI-IM configuration	1,4		CSI-IM.1.1 FDD
	2,5		CSI-IM.1.1 TDD
	3,6		CSI-IM.1.1 TDD
	3,6		CSI-IM.2.1 TDD

OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
DRX configuration	1~6		DRX.3
reportConfigType	1~6		periodic
reportQuantity-r16	1~6		ssb-Index-SINR-r16
Number of reported RS	1~6		2
L1-SINR reporting period	1~6	slot	80
T1	1~6	s	5
T2	1~6	s	1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.4.6.7.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} ^{Note2}	1~6	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1,2,4,5	dBm/SSB SCS	-94.65			
	3,6		-91.65			
$\hat{E}_s / I_{ot}$	1~6	dB	0	0	-Infinity	3
SS-RSRP ^{Note3}	1,2,4,5	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3,6		-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1,2,4,5	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3,6	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1~6	dB	0	0	-Infinity	3

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.4.6.7.2.3 Test Requirements

The UE shall send L1-SINR report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-SINR report including results of both SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1 while meeting the accuracy requirement in clause 10.1.27.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.4.6.7.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR configured when DRX is used

A.4.6.7.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements with CSI-RS based CMR and dedicated IMR configured in clause 9.8.4.3, with the testing configurations for NR cells in Table A.4.6.7.3.1-1.

Table A. A.4.6.7.3.1-1: Applicable NR configurations for FR1 L1-SINR test with CMR and dedicated IMR

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.4.6.7.3.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.6.7.3.2-1 and Table A.4.6.7.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the configured CSI-RS as CMR and an associated CSI-RS as IMR, and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources and the associated IMR. After 80ms from the beginning of the test, the DCI trigger comes in slot n (1 Config 1,2,4,5 and 8 for Config 3,6) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.4.6.7.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs, and UE is configured to perform L1-SINR measurement based on the CSI-RS as CMR and the CSI-RS as IMR.

Table A.4.6.7.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2,5		10: N _{RB,c} = 52
	3,6		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
CSI-RS configuration as CMR	1,4		CSI-RS.1.3 FDD
	2,5		CSI-RS.1.3 TDD
	3,6		CSI-RS.2.3 TDD
CSI-RS configuration as IMR	1,4		CSI-RS.1.2A FDD
	2,5		CSI-RS.1.2A TDD
	3,6		CSI-RS.2.2A TDD
OCNG Patterns	1~6		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTc configuration	1~6		SMTc.1
DRX configuration	1~6		DRX.3
reportConfigType	1~6		aperiodic
reportQuantity-r16	1~6		cri-SINR-r16
Number of reported RS	1~6		2
qcl-Info	1~6		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~6	slots	26
T1	1~6	s	5
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			

EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.4.6.7.3.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} ^{Note1}	1~6	dBm/15kHz	-94.65	
N_{oc} ^{Note1}	1,2,4,5	dBm/SSB SCS	-94.65	
	3,6		-91.65	
$\hat{E}_s / I_{ot}$	1~6	dB	0	3
$\hat{E}_s / N_{oc}$	1~6	dB	0	3
CSI-RS RSRP ^{Note2}	1,2,4,5	dBm/SSB SCS	-94.65	-91.65
	3,6		-91.65	-88.65
I_o ^{Note2}	1,2,4,5	dBm/9.36 MHz	-63.69	-61.93
	3,6	dBm/38.16 MHz	-57.59	-55.84
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.4.6.7.3.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 as CMR + CSI-RS#0 as IMR and CSI-RS#1 as CMR + CSI-RS#1 as IMR while meeting the accuracy requirement in clause 10.1.27.3.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.8 CSI-RS based intra-frequency Measurement

A.4.6.8.1 EN-DC event triggered reporting tests without gap under DRX

A.4.6.8.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the CSI-RS based L3 intra-frequency requirements in clause 9.10.2.

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters for PSCell are given in Table A.4.6.8.1.1-1, A.4.6.8.1.1-2, A.4.6.8.1.1-3 and A.4.6.8.1.1-4 below and the test parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used for the CSI-RS based L3 intra-frequency measurements. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

UE is allocated with PUSCH resource at every DRX cycle.

NOTE: TAT= infinite based on the DRX configuration used in test.

Table A.4.6.8.1.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: Target NR Cell 3 has the same SCS, BW and duplex mode as NR serving Cell 2	

Table A.4.6.8.1.1-2: General test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
Active cell		1, 2, 3, 4, 5, 6	E-UTRAN Cell 1 and NR Cell 2	
Neighbour cell		1, 2, 3, 4, 5, 6	NR Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3, 4, 5, 6	1: Cell 1 2: Cell 2 and Cell 3	
SMTC configuration		1, 4	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SMTC.1	
A3-Offset	dB	1, 2, 3, 4, 5, 6	-4.5	
CP length		1, 2, 3, 4, 5, 6	Normal	
Hysteresis	dB	1, 2, 3, 4, 5, 6	0	
Time To Trigger	s	1, 2, 3, 4, 5, 6	0	
Filter coefficient		1, 2, 3, 4, 5, 6	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.5	
Time offset between PCell and PSCell	μs	1, 2, 3, 4, 5, 6	3	Synchronous EN-DC
Time offset between serving and neighbour cells	μs	1, 4	4.7	The timing of Cell 3 is CP later than the timing of Cell 2.

		2, 5	4.7	
		3, 6	2.35	
T1	s	1, 2, 3, 4, 5, 6	5	
T2	s	1, 2, 3, 4, 5, 6	11	

Table A.4.6.8.1.1-3: NR Cell specific test parameters for EN-DC intra-frequency event triggered reporting without gap for PSCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2, 5	TDDConf.1.1		TDDConf.1.1	
		3, 6	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2, 5	SR.1.1 TDD			
		3, 6	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2, 5	CR.1.1 TDD		CR.1.1 TDD	
		3, 6	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD		CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2, 5	TRS.1.1 TDD		N/A	
		3, 6	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.1.1		ULBWP.1.1	
SSB parameters		1,4	SSB.1 FR1		SSB.5 FR1	
		2,5	SSB.1 FR1		SSB.5 FR1	
		3,6	SSB.2 FR1		SSB.6 FR1	
CSI-RS configuration for RRM		1,4	CSI-RS.RRM.FR1.1 FDD			
		2,5	CSI-RS.RRM.FR1.1 TDD			
		3,6	CSI-RS.RRM.FR1.2 TDD			
RLM-RS		1, 2, 3, 4, 5, 6	SSB		SSB	
N_{oc} ^{Note 2}	dBm/SCS	1,2,4,5	-98			
		3, 6	-95			
N_{oc} ^{Note 2}	dBm/15 kHz	1, 2, 3, 4, 5, 6	-98			
$\hat{E}_s/I_{ot}$ for SSB	dB	1, 2, 3, 4, 5, 6	4	-1.46	-Infinity	-1.46
$\hat{E}_s/I_{ot}$ for CSI-RS	dB	1, 2, 3, 4, 5, 6	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$ for SSB	dB	1, 2, 3, 4, 5, 6	4	4	-Infinity	4

$\hat{E}_s/N_{oc}$ for CSI-RS	dB	1, 2, 3, 4, 5, 6	4	4	-Infinity	4
SS-RSRP ^{Note 3}	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2, 5	-94	-94	-Infinity	-94
		3, 6	-91	-91	-Infinity	-91
CSI-RSRP ^{Note 3}	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2, 5	-94	-94	-Infinity	-94
		3, 6	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2, 5	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and CSI-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.4.6.8.1.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE is not required to read the SSB index indicated by associatedSSB in the neighbour cell in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.6.9 CSI-RS based inter-frequency Measurement

A.4.6.9.1 EN-DC event triggered reporting tests for FR1 cell when non-DRX is used

A.4.6.9.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell measurement requirements in clause 9.10.3.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.4.6.9.1.1-1, A.4.6.9.1.1-2, and A.4.6.9.1.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.4.6.9.1.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.4.6.2.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.4.6.9.1.1-1.

Table A.4.6.9.1.1-1: EN-DC event triggered reporting tests with SSB index reading for FR1-FR1

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell3 has the same SCS, BW and duplex mode as NR serving cell2	

Table A.4.6.9.1.1-2: General test parameters for EN-DC inter-frequency event triggered reporting

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		Two FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	39	19	
A3-Offset	dB	Config 1,2,3,4,5,6	-6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX	ms	Config 1,2,3,4,5,6	OFF		DRX is not used
Time offset between PCell and PScell	μs	Config 1,2,3,4,5,6	3		Synchronous EN-DC
Time offset between serving and neighbour cells	μs	Config 1,4	4.7		The timing of Cell 3 is CP later than the timing of Cell 2.
		Config 2,5	4.7		
		Config 3,6	2.35		
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	3	3	

Table A.4.6.9.1.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD			
		Config 2,3,5,6	TDD			
BW _{channel}	MHz	Config 1,4	10: N _{RB,c} = 52			
		Config 2,5	10: N _{RB,c} = 52			
		Config 3,6	40: N _{RB,c} = 106			
BWP BW	MHz	Config 1,4	10: N _{RB,c} = 52			
		Config 2,5	10: N _{RB,c} = 52			
		Config 3,6	40: N _{RB,c} = 106			
TDD configuration		Config 2,5	TDDConf.1.1			
		Config 3,6	TDDConf.2.1			
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1		NA	
TRS configuration		Config 1,4	TRS.1.1 FDD		NA	
		Config 2,5	TRS.1.1 TDD		NA	
		Config 3,6	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		-	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR. 2.1 TDD			
CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR.2.1 TDD			
SSB parameters		Config 1,4	SSB.1 FR1		SSB.5 FR1	
		Config 2,5	SSB.1 FR1		SSB.5 FR1	
		Config 3,6	SSB.2 FR1		SSB.6 FR1	
SMTC configuration		Config 1,4	SMTC.2			
		Config 2,3,5,6	SMTC.1			
CSI-RS configuration for RRM		Config 1,4	CSI-RS.RRM.FR1.1 FDD			
		Config 2,5	CSI-RS.RRM.FR1.1 TDD			
		Config 3,6	CSI-RS.RRM.FR1.2 TDD			
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15			
		Config 3,6	30			
EPRE ratio of PSS to SSS						
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						

EPRE ratio of PDCCH to PDCCH DMRS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15kHz Z		-98		-98	
N_{oc}^{Note2}	dBm/SCS	Config 1,2,4,5	-98		-98	
		Config 3,6	-95		-95	
SS-RSRP ^{Note 3}	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
CSI-RSRP ^{Note 3}	dBm/SCS	Config 1,2,4,5	-94	-94	-Infinity	-91
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{\alpha}$ for SSB	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / I_{\alpha}$ for CSI-RS	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$ for SSB	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$ for CSI-RS	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
I_o^{Note3}	dBm/9.36 MHz	Config 1,2,4,5	-64.59	-64.59	-70.05	-62.26
	dBm/38.16 MHz	Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP, CSI-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					

A.4.6.9.1.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 2240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 2000 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is required to read the SSB index indicated by associatedSSB in the neighbour cell in this test NOTE:

The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.4.7 Measurement Performance requirements

Unless explicitly stated otherwise:

- Reported measurements shall be within defined range of accuracy limits defined in Clause 10 for at least 90 % of the reported cases. If multiple measurement performance requirements are verified in the same test, the reported measurements for each requirement shall be within defined range of accuracy limits of the corresponding requirement defined in Clause 10 for at least 90% of the reported cases.
- Measurements are performed in RRC_CONNECTED state.
- The reference channels assume transmission of PDSCH with a maximum number of 5 HARQ transmissions unless otherwise specified.

A.4.7.1 SS-RSRP

A.4.7.1.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.2.1.1 and 10.1.2.1.2 for intra-frequency measurements.

A.4.7.1.1.2 Test parameters

In this set of test cases all NR cells are on the same carrier frequency. Supported test configurations are shown in table A.4.7.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.4.7.1.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1 In all test cases, Cell 2 is the PSCell, and Cell 3 is the target cell.

Table A.4.7.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Note: The UE is only required to be tested in one of the supported test configurations for each supported band

Table A.4.7.1.1.2-2: SS-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					

		Config 2,5		TDDConf.1.1				
		Config 3,6		TDDConf.2.1				
BW _{channel}		Config 1,4	MHz	10: N _{RB,c} = 52				
		Config 2,5		10: N _{RB,c} = 52				
		Config 3,6		40: N _{RB,c} = 106				
Downlink initial BWP configuration				DLBWP.0.1				
Downlink dedicated BWP configuration				DLBWP.1.1				
Uplink initial BWP configuration				ULBWP.0.1				
Uplink dedicated BWP configuration				ULBWP.1.1				
TRS configuration	Config 1,4		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2,5		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3,6		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle			ms	Not Applicable				
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Control Channel RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
SSB configuration	Config 1,4		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2,5		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3,6		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 2	Config 1,4	ms	-	3	-	3	-	3
	Config 2,3,5,6	μs	-	3	-	3	-	3
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3,5,6		SMTC.1					
OCNG Patterns				OP.1				
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz					
	Config 3,6		30kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N _{oc} ^{Note2}	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-106		-88	-114	
		NR_FDD_FR1_B					-113.5	
		NR_TDD_FR1_C					-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D					-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E					-112	
		NR_FDD_FR1_F					-111.5	
		NR_FDD_FR1_G					-111	

	Config 3,6	NR_FDD_FR1_H		Not applicable ^{Note 5}		-94		-110.5	
		NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 6}						-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} ^{Note2}	Config 1,2,4,5		dBm/SCS	-106		-88		Same as Noc/15kHz	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 6}		Not applicable ^{Note 5}		-91		-111	
		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	2.46	-5.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6	1	6	1	3	0
SS- RSRP ^{Note3}	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 6}	dBm/SCS	-100	-105	-82	-87	-111.00	-114.00
		NR_FDD_FR1_B						-110.50	-113.50
		NR_TDD_FR1_C						-110.00	-113.00
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.50	-112.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109.00	-112.00
		NR_FDD_FR1_F						-108.50	-111.50
		NR_FDD_FR1_G						-108.00	-111.00
		NR_FDD_FR1_H						-107.50	-110.50
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 6}		- Not applicab le ^{Note 5}	Not applicabl e ^{Note 5}	-85	-90	-108.00	-111.00
		NR_FDD_FR1_B		-107.50	-110.50				
		NR_TDD_FR1_C		-107.00	-110.00				
		NR_FDD_FR1_D, NR_TDD_FR1_D		-106.50	-109.50				
		NR_FDD_FR1_E, NR_TDD_FR1_E		-106.00	-109.00				
		NR_FDD_FR1_F		-105.50	-108.50				
		NR_FDD_FR1_G		-105.00	-108.00				
		NR_FDD_FR1_H		-104.50	-107.50				
I_o ^{Note3}	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 6}	dBm/ 9.36MHz	-70.09		-52.09		-80.03	
		NR_FDD_FR1_B						-79.53	
		NR_TDD_FR1_C						-79.03	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-78.53	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-78.03	
		NR_FDD_FR1_F						-77.53	
		NR_FDD_FR1_G						-77.03	
		NR_FDD_FR1_H						-76.53	

Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	Not applicable ^{Note 5}	-51.99	-73.94
	NR_FDD_FR1_B				-73.44
	NR_TDD_FR1_C				-72.94
	NR_FDD_FR1_D, NR_TDD_FR1_D				-72.44
	NR_FDD_FR1_E, NR_TDD_FR1_E				-71.94
	NR_FDD_FR1_F				-71.44
	NR_FDD_FR1_G				-70.94
	NR_FDD_FR1_H				-70.44
Propagation condition		-	AWGN		
Antenna configuration			1x2		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5: Subtest 1 is not used when testing with 30kHz SSB SCS					
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification					

A.4.7.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for cell 2 and cell 3 shall fulfil absolute requirement in clause 10.1.2.1.1 and relative requirement in clause 10.1.2.1.2.

A.4.7.1.2 EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.4.1.1 and 10.1.4.1.2 for inter-frequency measurements with the testing configurations in Table A.4.7.1.2.1-1.

Table A.4.7.1.2.1-1: Applicable NR configurations for FR1 inter-frequency SS-RSRP accuracy test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations on each supported band	

A.4.7.1.2.2 Test parameters

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on a different frequency than the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.4.7.1.2.2-1 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.4.7.1.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.4.7.1.2.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN	1~6		freq1	freq2	freq1	freq2
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52		10: N _{RB,c} = 52	
	2,5		10: N _{RB,c} = 52		10: N _{RB,c} = 52	
	3,6		40: N _{RB,c} = 106		40: N _{RB,c} = 106	
Gap pattern ID			0		0	
Duplex mode	1,4		FDD		FDD	
	2,5		TDD		TDD	
	3,6		TDD		TDD	
TDD configuration	1,4		N/A		N/A	
	2,5		TDDConf.1.1		TDDConf.1.1	
	3,6		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	2,5		SR.1.1 TDD		SR.1.1 TDD	
	3,6		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	-	CR.1.1 FDD	-
	2,5		CR.1.1 TDD	-	CR.1.1 TDD	-
	3,6		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2,5		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3,6		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1,4		SSB.1 FR1		SSB.1 FR1	
	2,5		SSB.1 FR1		SSB.1 FR1	
	3,6		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~6		OP.1		OP.1	
TRS configuration	1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-
	2,5		TRS.1.1 TDD		TRS.1.1 TDD	
	3,6		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 2	1,4	ms	-	3	-	3
	2,3,5,6	μs	-	3	-	3
SMTC configuration	1,4		SMTC.2		SMTC.2	
	2,3,5,6		SMTC.1		SMTC.1	
EPRE ratio of PSS to SSS	1~6	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						

EPRE ratio of OCNG to OCNG DMRS ^{Note 1}							
N_{oc} ^{Note2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5} ,	1~6	dBm/15 kHz	-94.65	(N_{oc} for Cell 3 +8dB)	-115	
	NR_FDD_FR1_B					-114.5	
	NR_TDD_FR1_C					-114	
	NR_FDD_FR1_D, NR_TDD_FR1_D					-113.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E					-113	
	NR_FDD_FR1_F					-112.5	
	NR_FDD_FR1_G					-112	
	NR_FDD_FR1_H					-111.5	
N_{oc} ^{Note2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5} ,	1,2,4,5	dBm/SS B SCS	-94.65	(N_{oc} for Cell 3 +8dB)	-115	
	NR_FDD_FR1_B					-114.5	
	NR_TDD_FR1_C					-114	
	NR_FDD_FR1_D, NR_TDD_FR1_D					-113.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E					-113	
	NR_FDD_FR1_F					-112.5	
	NR_FDD_FR1_G					-112	
	NR_FDD_FR1_H					-111.5	
	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5} ,	3,6		-91.65	(N_{oc} for C 3 +8dB)	-112.00	
	NR SDL FR1_A					-111.50	
	NR_FDD_FR1_B					-111.00	
	NR_TDD_FR1_C					-110.50	
	NR_FDD_FR1_D, NR_TDD_FR1_D					-110.00	
	NR_FDD_FR1_E, NR_TDD_FR1_E					-110.00	
	NR_FDD_FR1_F					-110.50	
	NR_FDD_FR1_G					-109.00	
	NR_FDD_FR1_H					-109.50	
	$\hat{E}_s/I_{ot}$					1~6	dB
SS- RSRP ^{Note3}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1,2,4,5	dBm/SC S	-84.65	(RSRP for Cell 3 +25dB)	-118.00	
	NR_FDD_FR1_B					-117.50	
	NR_TDD_FR1_C					-117.00	
	NR_FDD_FR1_D, NR_TDD_FR1_D					-116.50	
	NR_FDD_FR1_E, NR_TDD_FR1_E					-116.00	
	NR_FDD_FR1_F					-115.50	
	NR_FDD_FR1_G					-115.00	
	NR_FDD_FR1_H					-114.50	
	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5} ,	3,6		-81.65	(RSRP for Cell 3 +25dB)	-115.00	
	NR_FDD_FR1_B					-114.50	
	NR_TDD_FR1_C					-114.00	
	NR_FDD_FR1_D, NR_TDD_FR1_D					-113.50	
	NR_FDD_FR1_E, NR_TDD_FR1_E					-113.00	
	NR_FDD_FR1_F					-112.50	

	NR_FDD_FR1_G					-112.00	
	NR_FDD_FR1_H					-111.50	
Io ^{Note3}	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 ,	1,2,4,5	dBm/ 9.36MHz z	-56.28	(Io for Channel 3 +19.75dB)	-85.28	
	NR_FDD_FR1_B					-84.78	
	NR_TDD_FR1_C					-84.28	
	NR_FDD_FR1_D, NR_TDD_FR1_D					-83.78	
	NR_FDD_FR1_E, NR_TDD_FR1_E					-83.28	
	NR_FDD_FR1_F					-82.78	
	NR_FDD_FR1_G					-82.28	
	NR_FDD_FR1_H					-81.78	
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6 ,	3,6	dBm/ 38.16M Hz	-50.19	(Io for Channel 3 +19.75dB)	-79.19	
	NR_FDD_FR1_B					-78.69	
	NR_TDD_FR1_C					-78.19	
	NR_FDD_FR1_D, NR_TDD_FR1_D					-77.69	
	NR_FDD_FR1_E, NR_TDD_FR1_E					-77.19	
	NR_FDD_FR1_F					-76.69	
	NR_FDD_FR1_G					-76.19	
	NR_FDD_FR1_H					-75.69	
$\hat{E}_s / N_{oc}$		1~6	dB	10	10	13	-3
Propagation condition		1~6	-	AWGN		AWGN	
Antenna configuration				1x2		1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification							

A.4.7.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 and Cell 3 shall fulfil the Absolute requirement in clause 10.1.4.1.1 and Relative requirement in clause 10.1.4.1.2.

A.4.7.1.3 Void

A.4.7.2 SS-RSRQ

A.4.7.2.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.7.1.1.

A.4.7.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.4.7.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is test by using the parameters in Table A.4.7.2.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PCell and Cell 3 is the target cell.

Table A.4.7.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.4.7.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52					
	Config 2,5		10: N _{RB,c} = 52					
	Config 3,6		40: N _{RB,c} = 106					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Control Channel RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-

	Config 2,5		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OP. 1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 2	Config 1,4	ms	-	3	-	3	-	3
	Config 2,3,5,6	µs	-	3	-	3	-	3
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3,5,6		SMTC.1					
SSB configuration	Config 1,2,4,5		SSB.1 FR1					
	Config 3,6		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz					
	Config 3,6		30kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/15k Hz	-85	-101	-114		
		NR_FDD_FR1_B					-113.5	
		NR_TDD_FR1_C					-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D					-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E					-112	
		NR_FDD_FR1_F					-111.5	
		NR_FDD_FR1_G					-111	
		NR_FDD_FR1_H					-110.5	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7		-91	-	-114		
		NR_FDD_FR1_B					-113.5	
		NR_TDD_FR1_C					-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D					-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E					-112	
		NR_FDD_FR1_F					-111.5	
		NR_FDD_FR1_G					-111	
		NR_FDD_FR1_H					-110.5	
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/SC S	-85	-101	-114		
		NR_FDD_FR1_B					-113.5	
		NR_TDD_FR1_C					-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D					-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E					-112	
		NR_FDD_FR1_F					-111.5	
		NR_FDD_FR1_G					-111	
		NR_FDD_FR1_H					-110.5	

		Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7		-88		-		-111	
			NR_FDD_FR1_B						-110.5	
			NR_TDD_FR1_C						-110	
			NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
			NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
			NR_FDD_FR1_F						-108.5	
			NR_FDD_FR1_G						-108	
			NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{ot}$				dB	-1.76		-4.7		-5.46	-5.46
$\hat{E}_s/N_{oc}$				dB	3	3	-2.9	-2.9	-4	-4
SS- RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/SC S	-82	-82	-103.9	-103.9	-118	-118	
		NR_FDD_FR1_B						-117.5	-117.5	
		NR_TDD_FR1_C						-117	-117	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-116.5	-116.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-116	-116	
		NR_FDD_FR1_F						-115.5	-115.5	
		NR_FDD_FR1_G						-115	-115	
		NR_FDD_FR1_H						-114.5	-114.5	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7		-85	-85	-	-	-115	-115	
		NR_FDD_FR1_B						-114.5	-114.5	
		NR_TDD_FR1_C						-114	-114	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5	-113.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-113	-113	
		NR_FDD_FR1_F						-112.5	-112.5	
		NR_FDD_FR1_G						-112	-112	
		NR_FDD_FR1_H						-111.5	-111.5	
SS-RSRQ Note3			dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34	

Config 3,6	NR_FDD_FR1_E, NR_TDD_FR1_E	dBm/ 38.16M Hz	-50	-				-81.5
	NR_FDD_FR1_F							-81
	NR_FDD_FR1_G							-80.5
	NR_FDD_FR1_H							-80
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7							-77.4
	NR_FDD_FR1_B							-76.9
	NR_TDD_FR1_C							-76.4
	NR_FDD_FR1_D, NR_TDD_FR1_D							-75.9
	NR_FDD_FR1_E, NR_TDD_FR1_E							-75.4
	NR_FDD_FR1_F							-74.9
	NR_FDD_FR1_G							-74.4
	NR_FDD_FR1_H							-73.9
Propagation condition		-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration			1x2	1x2	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRQ, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: NR operating band groups are as defined in Clause 3.5.2. Note 6: Subtest 2 is not used when testing with 30kHz SSB SCS Note 7: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification								

A.4.7.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.7.1.1.

A.4.7.2.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.9.1.1 and 10.1.9.1.2 for inter frequency measurement.

A.4.7.2.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.4.7.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.4.7.2.2.2-2. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.4.7.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.7.2.2-2: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52					
	Config 2,5		10: N _{RB,c} = 52					
	Config 3,6		40: N _{RB,c} = 106					
BWP BW	Config 1,4	MHz	10: N _{RB,c} = 52					
	Config 2,5		10: N _{RB,c} = 52					
	Config 3,6		40: N _{RB,c} = 106					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2,5		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OCNG pattern 1					

Time offset with Cell 2		Config 1,4	ms	-	3	-	3	-	3		
		Config 2,3,5,6	μs	-	3	-	3	-	3		
SMTC configuration		Config 1,4		SMTC pattern 2							
		Config 2,3,5,6		SMTC pattern 1							
SSB configuration		Config 1,2,4,5		SSB pattern 1 in FR1							
		Config 3,6		SSB pattern 2 in FR1							
PDSCH/PDCCH subcarrier spacing		Config 1,2,4,5	kHz	15 kHz							
		Config 3,6		30 kHz							
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0		
EPRE ratio of PBCH DMRS to SSS											
EPRE ratio of PBCH to PBCH DMRS											
EPRE ratio of PDCCH DMRS to SSS											
EPRE ratio of PDCCH to PDCCH DMRS											
EPRE ratio of PDSCH DMRS to SSS											
EPRE ratio of PDSCH to PDSCH											
EPRE ratio of OCNG DMRS to SSS(Note 1)											
EPRE ratio of OCNG to OCNG DMRS (Note 1)											
N_{oc}^{Note2}	Config 1,2,4,5	NR_FDD_FR1_A	dBm/15kHz	-80.18	-80.18	-106	-106	-116	-116		
		NR_TDD_FR1_A									
		NR_SDL_FR1_A									
		NR_FDD_FR1_B								-115.5	-115.5
		NR_TDD_FR1_C								-115	-115
		NR_FDD_FR1_D								-114.5	-114.5
		NR_TDD_FR1_D									
		NR_FDD_FR1_E								-114	-114
	NR_TDD_FR1_E										
	NR_FDD_FR1_G			-113	-113						
	NR_TDD_FR1_G			-112.5	-112.5						
	NR_FDD_FR1_H										
	Config 3,6	NR_FDD_FR1_A	dBm/15kHz	-86.27	-86.27	-113	-113	-116	-116		
		NR_TDD_FR1_A									
		NR_SDL_FR1_A									
		NR_FDD_FR1_B								-115.5	-115.5
		NR_TDD_FR1_C								-115	-115
		NR_FDD_FR1_D								-114.5	-114.5
NR_TDD_FR1_D											
NR_FDD_FR1_E									-114	-114	
NR_TDD_FR1_E											
NR_FDD_FR1_G			-113	-113							
NR_TDD_FR1_G			-112.5	-112.5							
NR_FDD_FR1_H											
N_{oc}^{Note2}	Config 1,2,4,5	NR_FDD_FR1_A	dBm/SCS	-80.18	-80.18	-106	-106	-116	-116		
		NR_TDD_FR1_A									
		NR_SDL_FR1_A									
		NR_FDD_FR1_B								-115.5	-115.5
		NR_TDD_FR1_C								-115	-115
		NR_FDD_FR1_D								-114.5	-114.5
		NR_TDD_FR1_D									
		NR_FDD_FR1_E								-114	-114
	NR_TDD_FR1_E										
	NR_FDD_FR1_G			-113	-113						
	NR_TDD_FR1_G			-112.5	-112.5						
	NR_FDD_FR1_H										
	Config 3,6	NR_FDD_FR1_A		-83.27	-83.27	-110	-110	-113	-113		
		NR_TDD_FR1_A									
		NR_SDL_FR1_A									
		NR_FDD_FR1_B								-112.5	-112.5
		NR_TDD_FR1_C								-112	-112
		NR_FDD_FR1_D								-111.5	-111.5
NR_TDD_FR1_D											
NR_FDD_FR1_E									-111	-111	
NR_TDD_FR1_E											
NR_FDD_FR1_G			-110	-110							
NR_TDD_FR1_G			-109.5	-109.5							
NR_FDD_FR1_H											
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75		
$\hat{E}_s / N_{oc}$			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75		

SS-RSRP ^{Note3}	Config 1,2,4,5	NR_FDD_FR1_A	dBm/SCS	-81.93	-81.93	-107.75	-107.75	-113	-		
		NR_TDD_FR1_A							117.75		
		NR_SDL_FR1_A									
		NR_FDD_FR1_B							-112.5	-	
										117.25	
		NR_TDD_FR1_C							-112	-	
										116.75	
		NR_FDD_FR1_D							-111.5	-	
	NR_TDD_FR1_D				116.25						
	NR_FDD_FR1_E			-111	-						
	NR_TDD_FR1_E				115.75						
	NR_FDD_FR1_G			-110	-						
					114.75						
	NR_FDD_FR1_H			-109.5	-						
					114.25						
	Config 3,6	NR_FDD_FR1_A		-85.02	-85.02	-111.75	-111.75	-110	-		
		NR_TDD_FR1_A							114.75		
		NR_SDL_FR1_A									
		NR_FDD_FR1_B							-109.5	-	
								114.25			
NR_TDD_FR1_C			-109					-			
								113.75			
NR_FDD_FR1_D			-108.5					-			
NR_TDD_FR1_D			113.25								
NR_FDD_FR1_E		-108	-								
NR_TDD_FR1_E			112.75								
NR_FDD_FR1_G		-107	-								
			111.75								
NR_FDD_FR1_H		-106.5	-								
			111.25								
SS-RSRQ ^{Note3}		NR_FDD_FR1_A	dB	-14.77	-14.77	-14.77	-14.77	-12.56	-14.76		
		NR_TDD_FR1_A									
		NR_FDD_FR1_B									
		NR_TDD_FR1_C									
		NR_FDD_FR1_D									
		NR_TDD_FR1_D									
		NR_FDD_FR1_E									
		NR_TDD_FR1_E									
		NR_FDD_FR1_G									
		NR_FDD_FR1_H									
Io ^{Note3}	Config 1,2,4,5	NR_FDD_FR1_A	dBm/ 9.36MHz	-50	-50	-75.83	-75.83	-83.28	-85.83		
		NR_TDD_FR1_A									
		NR_SDL_FR1_A									
		NR_FDD_FR1_B							-82.78	-85.33	
		NR_TDD_FR1_C							-82.28	-84.83	
		NR_FDD_FR1_D							-81.78	-84.33	
		NR_TDD_FR1_D									
		NR_FDD_FR1_E							-81.28	-83.83	
	NR_TDD_FR1_E										
	NR_FDD_FR1_G			-80.28	-82.83						
	NR_FDD_FR1_H			-79.78	-82.33						
	Config 3,6	NR_FDD_FR1_A		dBm/ 38.16MHz	-50	-50	-76.73	-76.73	-77.19	-79.73	
		NR_TDD_FR1_A									
		NR_SDL_FR1_A									
		NR_FDD_FR1_B								-76.69	-79.23
		NR_TDD_FR1_C								-76.19	-78.73
NR_FDD_FR1_D			-75.69						-78.23		
NR_TDD_FR1_D											
NR_FDD_FR1_E			-75.19						-77.73		
NR_TDD_FR1_E											
NR_FDD_FR1_G		-74.19	-76.73								
NR_FDD_FR1_H		-73.69	-76.53								
Propagation condition				AWGN	AWGN	AWGN	AWGN	AWG N	AWG N		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.											

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRQ, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	NR operating band groups are as defined in Clause 3.5.2.

A.4.7.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.9.1.1 and 10.1.9.1.2.

A.4.7.3 SS-SINR

A.4.7.3.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.12.1.1.

A.4.7.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.4.7.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.4.7.3.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PCell and Cell 3 is the target cell.

Table A.4.7.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.7.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
Cell ID			489	0	489	0
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2,5		TDDConf.1.1			
	Config 3,6		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			

DRX Cycle configuration		ms	Not Applicable			
TRS Configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2,5		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
Time offset with Cell 2	Config 1,4	ms	-	3	-	3
	Config 2,3,5,6	μs	-	3	-	3
SMTc configuration	Config 1,4		SMTc.2			
	Config 2,3,5,6		SMTc.1			
SSB configuration	Config 1,2,4,5		SSB.1 FR1			
	Config 3,6		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15			
	Config 3,6		30			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-93		-116	
	NR_FDD_FR1_B				-115.5	
	NR_TDD_FR1_C				-115	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-114.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-114	
	NR_FDD_FR1_F				-113.5	
	NR_FDD_FR1_G				-113	
	NR_FDD_FR1_H				-112.5	
N_{oc} ^{Note2}	Config 1,2,4,5	dBm/SCS	-93		Same as Noc for 15kHz	

	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-90		-113	
		NR_FDD_FR1_B				-112.5	
		NR_TDD_FR1_C				-112	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-111.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-111	
		NR_FDD_FR1_F				-110.5	
		NR_FDD_FR1_G				-110	
		NR_FDD_FR1_H				-109.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
SS- RSRP ^{Not e3}	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A	dBm/SCS	-88.46	-90.34	-120	-120
		NR_FDD_FR1_B				-119.5	-119.5
		NR_TDD_FR1_C				-119	-119
		NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5	-118.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-118	-118
		NR_FDD_FR1_F				-117.5	-117.5
		NR_FDD_FR1_G				-117	-117
		NR_FDD_FR1_H				-116.5	-116.5
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	-85.46	-87.34	-117	-117	
		NR_FDD_FR1_B			-116.5	-116.5	
		NR_TDD_FR1_C			-116	-116	
		NR_FDD_FR1_D, NR_TDD_FR1_D			-115.5	-115.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E			-115	-115	
		NR_FDD_FR1_F			-114.5	-114.5	
		NR_FDD_FR1_G			-114	-114	
		NR_FDD_FR1_H			-113.5	-113.5	
SS-SINR ^{Note3}			dB	0	-3.19	-5.46	-5.46
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6						
	NR_FDD_FR1_B						
	NR_TDD_FR1_C						
	NR_FDD_FR1_D, NR_TDD_FR1_D						
	NR_FDD_FR1_E, NR_TDD_FR1_E						
	NR_FDD_FR1_F						
	NR_FDD_FR1_G						
	NR_FDD_FR1_H						
Io ^{Note3}	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.5	-85.51		
		NR_FDD_FR1_B			-85.01		
		NR_TDD_FR1_C			-84.51		
		NR_FDD_FR1_D, NR_TDD_FR1_D			-84.01		
		NR_FDD_FR1_E, NR_TDD_FR1_E			-83.51		

	Config 3,6	NR_FDD_FR1_F	dBm/ 38.16MHz	-51.41	-83.01
		NR_FDD_FR1_G			-82.51
		NR_FDD_FR1_H			-82.01
		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6			-79.41
		NR_FDD_FR1_B			-78.91
		NR_TDD_FR1_C			-78.41
		NR_FDD_FR1_D, NR_TDD_FR1_D			-77.91
		NR_FDD_FR1_E, NR_TDD_FR1_E			-77.41
		NR_FDD_FR1_F			-76.91
		NR_FDD_FR1_G			-76.41
		NR_FDD_FR1_H			-75.91
Propagation condition			-	AWGN	
Antenna configuration			-	1x2	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3:	SS-SINR, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4:	SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5:	NR operating band groups are as defined in Clause 3.5.2.				
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification				

A.4.7.3.1.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.12.1.1.

A.4.7.3.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.14.1.1 and 10.1.14.1.2 for interfrequency measurement.

A.4.7.3.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.4.7.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.4.7.3.2.2-2. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell of which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.4.7.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.7.3.2.2-2: SS-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
Gap pattern ID			0	-	0	-	0	-
TRS configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2,5		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1. 1 FDD	-	CCR.1. 1 FDD	-	CCR.1. 1 FDD	-
	Config 2,5		CCR.1. 1 TDD		CCR.1. 1 TDD		CCR.1. 1 TDD	
	Config 3,6		CCR.2. 1 TDD		CCR.2. 1 TDD		CCR.2. 1 TDD	
OCNG Patterns			OP.1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 2	Config 1,4	ms	-	3	-	3	-	3
	Config 2,3,5,6	µs	-	3	-	3	-	3
SMTc configuration	Config 1,4		SMTc.2					
	Config 2,3,5,6		SMTc.1					
SSB configuration	Config 1,2,4,5		SSB.1 FR1					
	Config 3,6		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15					
	Config 3,6		30					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0

EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} ^{Note2}	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15k Hz	-88	-108.5	-119.5		
		NR_FDD_FR1_B				-119		
		NR_TDD_FR1_C				-118.5		
		NR_FDD_FR1_D NR_TDD_FR1_D				-118		
		NR_FDD_FR1_E NR_TDD_FR1_E				-117.5		
		NR_FDD_FR1_F				-117		
		NR_FDD_FR1_G				-116.5		
		NR_FDD_FR1_H				-116		
		N_{oc} ^{Note2}				Config 1,2,4,5		dBm/SC S
Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85	-105.5	-116.5			
	NR_FDD_FR1_B				-116			
	NR_TDD_FR1_C				-115.5			
	NR_FDD_FR1_D NR_TDD_FR1_D				-115			
	NR_FDD_FR1_E NR_TDD_FR1_E				-114.5			
	NR_FDD_FR1_F				-114			
	NR_FDD_FR1_G				-114.5			
	NR_FDD_FR1_H				-113			
$\hat{E}_s / I_{ot}$			dB	-1.75	20	-4.0		
$\hat{E}_s / N_{oc}$			dB	-1.75	20	-4.0		
SS- RSRP ^{Not e3}	Config 1,2,4,5		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SC S	-89.75	-88.5	-123.5	
		NR_FDD_FR1_B	-123					
		NR_TDD_FR1_C	-122.5					
		NR_FDD_FR1_D NR_TDD_FR1_D	-122					
		NR_FDD_FR1_E NR_TDD_FR1_E	-121.5					
		NR_FDD_FR1_F	-121					
		NR_FDD_FR1_G	-120.5					
		NR_FDD_FR1_H	-120					
		Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6				-86.75	-85.5
	NR_FDD_FR1_B		-120					
	NR_TDD_FR1_C		-119.5					
	NR_FDD_FR1_D NR_TDD_FR1_D		-119					
	NR_FDD_FR1_E NR_TDD_FR1_E		-118.5					
	NR_FDD_FR1_F		-118					
	NR_FDD_FR1_G		-117.5					

		NR_FDD_FR1_H				-117
SS-SINR ^{Note3}		NR_FDD_FR1_A	dB	-1.75	20	-4.0
		NR_TDD_FR1_A				
		NOTE 6				
		NR_FDD_FR1_B				
		NR_TDD_FR1_C				
		NR_FDD_FR1_D				
		NR_TDD_FR1_D				
		NR_FDD_FR1_E				
		NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
^{Note3} Io	Config 1,2,4,5	NR_FDD_FR1_A	dBm/ 9.36MHz	-57.83	-60.5	-90.09
		NR_TDD_FR1_A				
		NOTE 6				
		NR_FDD_FR1_B				-89.59
		NR_TDD_FR1_C				-89.09
		NR_FDD_FR1_D				-88.59
		NR_TDD_FR1_D				
		NR_FDD_FR1_E				-88.09
	NR_TDD_FR1_E					
	NR_FDD_FR1_F	-87.59				
	NR_TDD_FR1_F	-87.09				
	NR_FDD_FR1_G	-87.09				
	NR_TDD_FR1_G	-86.59				
	NR_FDD_FR1_H	-86.59				
	Config 3,6	NR_FDD_FR1_A	dBm/ 38.16MH Z	-51.73	-54.41	-84
		NR_TDD_FR1_A				
		NOTE 6				
		NR_FDD_FR1_B				-83.5
		NR_TDD_FR1_C				-83
		NR_FDD_FR1_D				-82.5
NR_TDD_FR1_D						
NR_FDD_FR1_E		-82				
NR_TDD_FR1_E						
NR_FDD_FR1_F	-81.5					
NR_TDD_FR1_F	-81					
NR_FDD_FR1_G	-81					
NR_TDD_FR1_G	-80.5					
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5:	NR operating band groups are as defined in Clause 3.5.2.					
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification					

A.4.7.3.2.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.14.1.1 and 10.1.14.1.2.

A.4.7.4 L1-RSRP measurement for beam reporting

A.4.7.4.1 SSB based L1-RSRP measurement

A.4.7.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.5.2 and clause 10.1.19.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.4.7.4.1.1-1.

Table A.4.7.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.4.7.4.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.7.4.1.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.4.7.4.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.4.7.4.1.2-1: FR1 SSB based L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~6		freq1	freq1
Duplex mode	1,4		FDD	FDD
	2,5		TDD	TDD
	3,6		TDD	TDD
TDD Configuration	1,4		N/A	N/A
	2,5		TDDConf.1.1	TDDConf.1.1
	3,6		TDDConf.2.1	TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52
	2,5		10: N _{RB,c} = 52	10: N _{RB,c} = 52
	3,6		40: N _{RB,c} = 106	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	SR.1.1 FDD
	2,5		SR.1.1 TDD	SR.1.1 TDD
	3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	CR.1.1 FDD
	2,5		CR.1.1 TDD	CR.1.1 TDD
	3,6		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	CCR.1.1 FDD
	2,5		CCR.1.1 TDD	CCR.1.1 TDD
	3,6		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1	SSB.3 FR1
	2,5		SSB.3 FR1	SSB.3 FR1

		3,6		SSB.4 FR1	SSB.4 FR1
OCNG Patterns		1~6		OP.1	OP.1
TRS configuration		1,4		TRS.1.1 FDD	TRS.1.1 FDD
		2,5		TRS.1.1 TDD	TRS.1.1 TDD
		3,6		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration		1~6		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration		1~6		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~6		SMTC.1	SMTC.1
reportConfigType		1~6		periodic	periodic
reportQuantity		1~6		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS		1~6		2	2
L1-RSRP reporting period		1~6		slot80	slot80
EPRE ratio of PSS to SSS		1~6	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~6	dBm/15kHz	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SSB SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114

		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112	
		NR_FDD_FR1_F				-111.5	
		NR_FDD_FR1_G				-111	
		NR_FDD_FR1_H				-110.5	
$\hat{E}_s/I_{ot}$		1~6	dB	10		-3	
SSB RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SSB SCS	-84.65		-120	
	NR_FDD_FR1_B					-119.5	
	NR_TDD_FR1_C					-119	
	NR_FDD_FR1_D, NR_TDD_FR1_D					-118.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E					-118	
	NR_FDD_FR1_F					-117.5	
	NR_FDD_FR1_G					-117	
	NR_FDD_FR1_H					-116.5	
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-81.65		-117	
	NR_FDD_FR1_B					-116.5	
	NR_TDD_FR1_C					-116	
	NR_FDD_FR1_D, NR_TDD_FR1_D					-115.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E					-115	
	NR_FDD_FR1_F					-114.5	
	NR_FDD_FR1_G					-114	
	NR_FDD_FR1_H					-113.5	
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/9.36 MHz	-56.28		-87.28	
	NR_FDD_FR1_B					-86.78	
	NR_TDD_FR1_C					-86.28	
	NR_FDD_FR1_D, NR_TDD_FR1_D					-85.78	
	NR_FDD_FR1_E, NR_TDD_FR1_E					-85.28	
	NR_FDD_FR1_F					-84.78	
	NR_FDD_FR1_G					-84.28	
	NR_FDD_FR1_H					-83.78	
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		dBm/38.16 MHz	-50.19		-81.19
	NR_FDD_FR1_B						-80.69
	NR_TDD_FR1_C						-80.19
	NR_FDD_FR1_D, NR_TDD_FR1_D						-79.69
	NR_FDD_FR1_E, NR_TDD_FR1_E						-79.19
	NR_FDD_FR1_F						-78.69
	NR_FDD_FR1_G						-78.19
	NR_FDD_FR1_H						-77.69
$\hat{E}_s/N_{oc}$		1~6	dB	10		-3	
Propagation condition		1~6		AWGN		AWGN	
Antenna configuration		1~6		1x2		1x2	

- | | |
|---------|--|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 3: | RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 4: | RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 5: | The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification |

A.4.7.4.1.3 Test Requirements

The L1-RSRP measurement accuracy for SSB resource reported by UE in L1-RSRP report (SSB#0 or SSB#1) of Cell 2 shall fulfil the requirements in clauses 10.1.19.1.

A.4.7.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off

A.4.7.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.5.3 and clause 10.1.19.2 for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.4.7.4.2.1-1.

Table A.4.7.4.2.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.4.7.4.2.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.7.4.2.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.4.7.4.2.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.4.7.4.2.2-1: FR1 CSI-RS based L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~6		freq1	freq1
Duplex mode	1,4		FDD	FDD
	2,5		TDD	TDD
	3,6		TDD	TDD
TDD Configuration	1,4		N/A	N/A
	2,5		TDDConf.1.1	TDDConf.1.1

BW _{channel}	3,6	MHz	TDDConf.2.1	TDDConf.2.1
	1,4		10: N _{RB,c} = 52	10: N _{RB,c} = 52
	2,5		10: N _{RB,c} = 52	10: N _{RB,c} = 52
	3,6		40: N _{RB,c} = 106	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	SR.1.1 FDD
	2,5		SR.1.1 TDD	SR.1.1 TDD
	3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	CR.1.1 FDD
	2,5		CR.1.1 TDD	CR.1.1 TDD
	3,6		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	CCR.1.1 FDD
	2,5		CCR.1.1 TDD	CCR.1.1 TDD
	3,6		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1	SSB.3 FR1
	2,5		SSB.3 FR1	SSB.3 FR1
	3,6		SSB.4 FR1	SSB.4 FR1
OCNG Patterns	1~6		OP.1	OP.1
TRS configuration	1,4		TRS.1.1 FDD	TRS.1.1 FDD
	2,5		TRS.1.1 TDD	TRS.1.1 TDD
	3,6		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTc configuration	1~6		SMTc.1	SMTc.1
CSI-RS	1,4		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
	2,5		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
	3,6		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
reportConfigType	1~6		periodic	periodic
reportQuantity	1~6		cri-RSRP	cri-RSRP
Number of reported RS	1~6		2	2
L1-RSRP reporting period	1~6		slot80	slot80
EPRE ratio of PSS to SSS	1~6	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
N _{oc} ^{Note 2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}		-94.65	-117
	NR_FDD_FR1_B			-116.5
	NR_TDD_FR1_C			-116
	NR_FDD_FR1_D, NR_TDD_FR1_D			-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E			-115

	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/CSI-RS SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s/I_{ot}$		1~6	dB	10	10
CSI-RS RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/CSI-RS SCS	-84.65	-120
	NR_FDD_FR1_B				-119.5
	NR_TDD_FR1_C				-119
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118
	NR_FDD_FR1_F				-117.5
	NR_FDD_FR1_G				-117
	NR_FDD_FR1_H				-116.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-81.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
I_o Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_FR1_B				-86.78
	NR_TDD_FR1_C				-86.28
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78

NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28
NR_FDD_FR1_F				-84.78
NR_FDD_FR1_G				-84.28
NR_FDD_FR1_H				-83.78
NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6	dBm/38.16 MHz	-50.19	-81.19
NR_FDD_FR1_B				-80.69
NR_TDD_FR1_C				-80.19
NR_FDD_FR1_D, NR_TDD_FR1_D				-79.69
NR_FDD_FR1_E, NR_TDD_FR1_E				-79.19
NR_FDD_FR1_F				-78.69
NR_FDD_FR1_G				-78.19
NR_FDD_FR1_H				-77.69
$\hat{E}_s / N_{oc}$	1~6	dB	10	-3
Propagation condition	1~6		AWGN	AWGN
Antenna configuration	1~6		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification				

A.4.7.4.2.3 Test Requirements

The L1-RSRP measurement accuracy for CSI-RS resource reported by UE in L1-RSRP report (CSI-RS#0 or CSI-RS#1) of Cell 2 shall fulfil the requirements in clauses 10.1.19.2.

A.4.7.5 SFTD accuracy

A.4.7.5.1 SFTD accuracy

A.4.7.5.1.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the SFTD measurement accuracy is within the specified limits. This test will verify the requirements as specified in clause 9.1.27 in TS 36.133 [15] for EN-DC SFTD measurements.

A.4.7.5.1.2 Test Parameters

Supported test configurations are shown in Table A.4.7.5.1.2-1. In this set of test cases there are two cells on different carriers. Cell 1 is E-UTRAN PCell and Cell 2 is NR FR1 PSCell. The test parameters of cell 1 are given in clause A.3.7.2.1. The test parameters of cell 2 are given in Table A.4.7.5.1.2-2. The SFTD between PCell and PSCell shall be set by the test equipment to one of the time differences in Table A.4.7.5.1.2-3.

Table A.4.7.5.1.2-1: Supported test configurations for SFTD accuracy

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD

2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.7.5.1.2-2: Test parameters for SFTD accuracy

Parameter	Config	Unit	Test 1
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2,5		10: N _{RB,c} = 52
	3,6		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
RMC CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.1 FR1
	2,5		SSB.1 FR1
	3,6		SSB.2 FR1
SMTC configuration	1~6		SMTC.1
DL BWP configuration	1~6		DLBWP.1.1
UL BWP configuration	1~6		ULBWP.1.1
CSI-RS for tracking	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
OCNG Patterns	1~6		OP.1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N_{oc} ^{Note 2}	1~6	dBm/15kHz	-104

	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
N_{oc} ^{Note2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1,2,4,5	dBm/SSB SCS	-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	3,6		-101
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
$\hat{E}_s/I_{ot}$		1~6	dB	-3
$\hat{E}_s/N_{oc}$		1~6	dB	-3
SS-RSRP ^{Note3}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1,2,4,5	dBm/SCS	-107
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	3,6		-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
I_o ^{Note3}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1,2,4,5	dBm/9.36 MHz	-74.28
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_TDD_FR1_D			

NR_FDD_FR1_E, NR_TDD_FR1_E			
NR_FDD_FR1_F			
NR_FDD_FR1_G			
NR_FDD_FR1_H			
NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	3,6	dBm/38.16 MHz	-68.18
NR_FDD_FR1_B			
NR_TDD_FR1_C			
NR_FDD_FR1_D, NR_TDD_FR1_D			
NR_FDD_FR1_E, NR_TDD_FR1_E			
NR_FDD_FR1_F			
NR_FDD_FR1_G			
NR_FDD_FR1_H			
Propagation condition	1~6		AWGN
Antenna configuration	1~6		1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification			

Table A.4.7.5.1.2-3: Timing offsets for SFTD accuracy test

Condition	SFN offset between PCell and PSCell	Frame boundary offset between PCell and PSCell (Ts)
1	100	-122000
2	300	-60540
3	500	1000
4	700	62540
5	900	124000

A.4.7.5.1.3 Test Requirements

The SFTD reported by the UE consists of 2 elements, SFN offset and frame boundary offset between PCell and PSCell. The reported SFTD accuracy shall fulfil the requirement in clause 9.1.27 in TS 36.133 [15].

A.4.7.5.2 Void

A.4.7.5.3 Void

A.4.7.6 CLI measurements

A.4.7.6.1 EN-DC SRS-RSRP measurement accuracy with FR1 serving cell

A.4.7.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SRS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.22.1.1 with the testing configurations for NR cells in Table A.4.7.6.1.1-1.

Table A.4.7.6.1.1-1: Applicable NR configurations for FR1 SRS-RSRP accuracy test

Config	Description
1	LTE FDD, NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
3	LTE TDD, NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.4.7.6.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.7.6.1.2-1 below. The test parameter for the (virtual) neighbor cell UE transmitting SRS are given in Table A.4.7.6.1.2-2.

Before the test UE is configured to perform SRS-RSRP measurement. During the test, the test system transmits SRS resources for measurement in the DL slots according to the SRS configuration in Table A.4.7.6.1.2-3. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 1 data symbol before SRS to be transmitted.

Table A.4.7.6.1.2-1: FR1 test parameters for SRS-RSRP accuracy for PSCell

Parameter	Config	Unit	Test 1	Test 2	Test 3
SSB GSCN	1~4		freq1	freq1	freq1
Duplex mode	1~4		TDD	TDD	TDD
TDD configuration	1,3		TDDConf.1.1	TDDConf.1.1	TDDConf.1.1
	2,4		TDDConf.2.1	TDDConf.2.1	TDDConf.2.1
BW _{channel}	1,3	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52	10: N _{RB,c} = 52
	2,4		40: N _{RB,c} = 106	40: N _{RB,c} = 106	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,3		SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD
	2,4		SR.2.1 TDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1,3		CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD
	2,4		CR.2.1 TDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1,3		CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD
	2,4		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1,3		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	2,4		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
OCNG Patterns	1~4		OP.1	OP.1	OP.1
TRS configuration	1,3		TRS.1.1 TDD	TRS.1.1 TDD	TRS.1.1 TDD
	2,4		TRS.1.2 TDD	TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTc configuration	1~4		SMTc.1	SMTc.1	SMTc.1
Time offset between DL from serving cell and SRS from test system	1~4	μs	17.67	17.67	17.67
EPRE ratio of PSS to SSS	1~4	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					

EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
N_{oc} Note2	NR_TDD_FR1_A ^{Note3}	1,3	dBm/15kHz	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A ^{Note3}	2,4		Not applicable ^{Note4}	-91	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
N_{oc} Note2	NR_TDD_FR1_A ^{Note3}	1,3	dBm/SRS SCS	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A ^{Note3}	2,4		Not applicable ^{Note4}	-88	-111
	NR_TDD_FR1_C					-110
	NR_TDD_FR1_D					-109.5
	NR_TDD_FR1_E					-109

Note 1:

OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2:

Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3:

The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

Note 4:

Test 1 is not used when testing with 30kHz SSB SCS

Table A.4.7.6.1.2-2: FR1 test parameters for SRS-RSRP accuracy for neighbour cell UE

	Parameter	Config	Unit	Test 1	Test 2	Test 3
N_{oc} Note2	NR_TDD_FR1_A ^{NOTE 3}	1,3	dBm/15kHz	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A ^{NOTE 5}	2,4		Not applicable ^{Note 6}	-91	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
N_{oc} Note2	NR_TDD_FR1_A ^{NOTE 5}	1,3	dBm/SRS SCS	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5

	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 5	2,4		Not applicable ^{Note 6}	-88	-111
	NR_TDD_FR1_C					-110
	NR_TDD_FR1_D					-109.5
	NR_TDD_FR1_E					-109
$\hat{E}_s/I_{ot}$ on SRS		1~4	dB	1	1	1
SRS RSRP Note3	NR_TDD_FR1_A NOTE 5	1,3	dBm/SRS SCS	-105	-87	-113
	NR_TDD_FR1_C					-112
	NR_TDD_FR1_D					-111.5
	NR_TDD_FR1_E					-111
	NR_TDD_FR1_A NOTE 5	2,4		Not applicable ^{Note 6}	-87	-110
	NR_TDD_FR1_C					-109
	NR_TDD_FR1_D					-108.5
	NR_TDD_FR1_E					-108
I _o ^{Note3}	NR_TDD_FR1_A NOTE 5	1,3	dBm/9.36 MHz	-74.51	-56.51	-82.51
	NR_TDD_FR1_C					-81.51
	NR_TDD_FR1_D					-81.01
	NR_TDD_FR1_E					-79.51
	NR_TDD_FR1_A NOTE 5	2,4	dBm/38.16 MHz	Not applicable ^{Note 6}	-53.42	-76.42
	NR_TDD_FR1_C					-75.42
	NR_TDD_FR1_D					-74.92
	NR_TDD_FR1_E					-74.42
$\hat{E}_s/N_{oc}$ on SRS		1~4	dB	1	1	1
Propagation condition		1~4		AWGN	AWGN	AWGN
Antenna configuration		1~4		1x2	1x2	1x2
SRS configuration		1,3		SRSCConf.1	SRSCConf.1	SRSCConf.1
		2,4		SRSCConf.2	SRSCConf.2	SRSCConf.2
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of the test.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over						
subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification						
Note 6: Test 1 is not used when testing with 30kHz SSB SCS						

Table A.4.7.6.1.2-3: SRS configuration parameters for FR1 SRS-RSRP accuracy

	Field	SRSCConf.1	SRSCConf.2
SRS-ResourceSet	srs-ResourceSetId	0	0
	srs-ResourceIdList	0	0
	resourceType	Periodic	Periodic
	Usage	Codebook	Codebook
SRS-Resource	SRS-ResourceId	0	0
	nrofSRS-Ports	Port1	Port1
	transmissionComb	n2	n2
	combOffset-n2	0	0
	cyclicShift-n2	0	0
	resourceMapping	0	0

startPosition		
resourceMapping nrofSymbols	n1	n1
resourceMapping repetitionFactor	n1	n1
freqDomainPosition	0	0
freqDomainShift	0	0
freqHopping c-SRS	12	12
freqHopping b-SRS	0	0
freqHopping b-hop	0	0
groupOrSequenceHopping	Neither	Neither
resourceType	Periodic	Periodic
periodicityAndOffset-p	sl20, 9	sl40, 19
sequenceId	0	0

A.4.7.6.1.3 Test Requirements

The SRS-RSRP measurement accuracy shall fulfil the requirements in clauses 10.1.22.1.1.

A.4.7.6.2 EN-DC CLI-RSSI measurement accuracy with FR1 serving cell

A.4.7.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CLI-RSSI measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.22.2.1 with the testing configurations for NR cells in Table A.4.7.6.2.1-1.

Table A.4.7.6.2.1-1: Applicable NR configurations for FR1 CLI-RSSI accuracy test

Config	Description
1	LTE FDD, NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
3	LTE TDD, NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.4.7.6.2.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.7.6.2.2-1 below.

Before the test UE is configured to perform CLI-RSSI measurement. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI resource and on 1 data symbol before. The CLI-RSSI measurement resource configuration is in Table A.4.7.6.2.2-2.

Table A.4.7.6.2.2-1: FR1 test parameters for CLI-RSSI accuracy

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1~4		TDD
TDD configuration	1,3		TDDConf.1.1
	2,4		TDDConf.2.1
BW _{channel}	1,3	MHz	10: N _{RB,c} = 52

	2,4		40: $N_{RB,c} = 106$
PDSCH Reference measurement channel	1,3		SR.1.1 TDD
	2,4		SR.2.1 TDD
RMSI CORESET Reference Channel	1,3		CR.1.1 TDD
	2,4		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,3		CCR.1.1 TDD
	2,4		CCR.2.1 TDD
SSB configuration	1,3		SSB.1 FR1
	2,4		SSB.2 FR1
OCNG Patterns ^{Note6}	1~4		OP.1
TRS configuration	1,3		TRS.1.1 TDD
	2,4		TRS.1.2 TDD
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~4		SMTC.1
Time offset between DL from serving cell and OCNG from test system	1~4	μs	17.67
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N_{oc} on CLI-RSSI measurement resource ^{Note2}	1,3	dBm/15kHz	-106
	2,4		-106
N_{oc} on CLI-RSSI measurement resource ^{Note2}	1,3	dBm/ BWP SCS	-106
	2,4		-103
$\hat{E}_s/I_{ot}$ on CLI-RSSI measurement resource	1~4	dB	-Infinity
RSRP on CLI-RSSI measurement resource ^{Note3}	1~4	dBm/ BWP SCS	-Infinity
I_o on CLI-RSSI measurement resource ^{Note3}	1,3	dBm/9.36 MHz	-78.05
	2,4	dBm/38.16 MHz	-71.96
I_o on CLI-RSSI measurement resource ^{Note3}	1,3	dBm/1.08 MHz	-87.43
	2,4		-87.44

$\hat{E}_s / N_{oc}$ on CLI-RSSI measurement resource	1~4	dB	-Infinity
Propagation condition	1~4		AWGN
Antenna configuration	1~4		1x2
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification Note 6: OCNG is not transmitted in the CLI-RSSI measurement resources.			

Table A.4.7.6.2.2-2: CLI-RSSI measurement resource configuration for FR1 CLI-RSSI accuracy

	Field	Config	SRSCConf.1
CLI-RSSI measurement resource	rsi-ResourceId	1~4	0
	rsi-SCS	1,3	15kHz
		2,4	30kHz
	startPRB	1~4	0
	nrofPRBs	1,3	52
		2,4	106
	startPosition	1~4	3
	nrofSymbols	1~4	11
	rsi-PeriodicityAndOffset	1,3	sl20, 9
		2,4	sl40, 19

A.4.7.6.2.3 Test Requirements

The CLI-RSSI measurement accuracy shall fulfil the requirements in clauses 10.1.22.2.1.

A.4.7.7 L1-SINR measurement for beam reporting

A.4.7.7.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off

A.4.7.7.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 9.8.4.1 and clause 10.1.27.1 for FR1 L1-SINR measurements based on CSI-RS with the testing configurations for NR cells in Table A.4.7.7.1.1-1, which configures the measurement resources for the CSI-RS based CMR and no dedicated IMR.

Table A.4.7.7.1.1-1: Applicable NR configurations for FR1 L1-SINR test with CSI-RS based CMR and no dedicated IMR configured

Config	Description
1	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode

4	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.4.7.7.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.7.7.1.2-1 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.4.7.7.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.4.7.7.1.2-1: FR1 CSI-RS based L1-SINR test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~6		freq1	freq1
Duplex mode	1,4		FDD	FDD
	2,5		TDD	TDD
	3,6		TDD	TDD
TDD Configuration	1,4		N/A	N/A
	2,5		TDDConf.1.1	TDDConf.1.1
	3,6		TDDConf.2.1	TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52
	2,5		10: N _{RB,c} = 52	10: N _{RB,c} = 52
	3,6		40: N _{RB,c} = 106	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	SR.1.1 FDD
	2,5		SR.1.1 TDD	SR.1.1 TDD
	3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	CR.1.1 FDD
	2,5		CR.1.1 TDD	CR.1.1 TDD
	3,6		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	CCR.1.1 FDD
	2,5		CCR.1.1 TDD	CCR.1.1 TDD
	3,6		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1,4		SSB.1 FR1	SSB.1 FR1
	2,5		SSB.1 FR1	SSB.1 FR1
	3,6		SSB.2 FR1	SSB.2 FR1
OCNG Patterns	1~6		OP.1	OP.1
TRS configuration	1,4		TRS.1.1 FDD	TRS.1.1 FDD
	2,5		TRS.1.1 TDD	TRS.1.1 TDD
	3,6		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1	SMTC.1
CSI-RS	1,4		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
	2,5		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
	3,6		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
reportConfigType	1~6		periodic	periodic

reportQuantity-r16		1~6		cri-SINR-r16	cri-SINR-r16
nrofReportedRS		1~6		2	2
L1-RSRP reporting period		1~6		slot80	slot80
EPRE ratio of PSS to SSS		1~6	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
N_{oc} ^{Note2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1~6	dBm/15kHz	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} ^{Note2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1,2,4,5	dBm/CSI-RS SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	3,6		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5

$\hat{E}_s / I_{ot}$		1~6	dB	10	-3
CSI-RS RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/CSI-RS SCS	-84.65	-120
	NR_FDD_FR1_B				-119.5
	NR_TDD_FR1_C				-119
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118
	NR_FDD_FR1_F				-117.5
	NR_FDD_FR1_G				-117
	NR_FDD_FR1_H				-116.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-81.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
I _O Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_FR1_B				-86.78
	NR_TDD_FR1_C				-86.28
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28
	NR_FDD_FR1_F				-84.78
	NR_FDD_FR1_G				-84.28
	NR_FDD_FR1_H				-83.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6	dBm/38.16 MHz	-50.19	-81.19
	NR_FDD_FR1_B				-80.69
	NR_TDD_FR1_C				-80.19
	NR_FDD_FR1_D, NR_TDD_FR1_D				-79.69
	NR_FDD_FR1_E, NR_TDD_FR1_E				-79.19
	NR_FDD_FR1_F				-78.69
	NR_FDD_FR1_G				-78.19
	NR_FDD_FR1_H				-77.69
$\hat{E}_s / N_{oc}$		1~6	dB	10	-3
Propagation condition		1~6		AWGN	AWGN
Antenna configuration		1~6		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.4.7.7.1.3 Test Requirements

The L1-SINR measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 2 shall fulfil the requirements in clauses 10.1.27.1.

A.4.7.7.2 L1-SINR measurement with SSB based CMR and dedicated IMR

A.4.7.7.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.8.4.2 and clause 10.1.27.2 for L1-SINR measurements with SSB based CMR and CSI-IM based IMR, with the testing configurations for NR cells in Table A.4.7.7.2.1-1.

Table A.4.7.7.2.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with SSB based CMR and CSI-IM based IMR

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.4.7.7.2.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.7.7.2.2-1 below. The absolute accuracy of L1-SINR measurements are tested by using the parameters in Table A.4.7.7.2.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources and one CSI-IM resource set with two CSI-IM resource. UE is configured to perform RLM and BFD measurement based on the SSB resources 0 and 1. UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-IM resources as IMR.

Table A.4.7.7.2.2-1: FR1 L1-SINR measurement test parameters with SSB based CMR and CSI-IM based IMR

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~6		freq1	freq1
Duplex mode	1,4		FDD	FDD
	2,5		TDD	TDD

	3,6		TDD	TDD
TDD Configuration	1,4		N/A	N/A
	2,5		TDDConf.1.1	TDDConf.1.1
	3,6		TDDConf.2.1	TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52
	2,5		10: N _{RB,c} = 52	10: N _{RB,c} = 52
	3,6		40: N _{RB,c} = 106	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	SR.1.1 FDD
	2,5		SR.1.1 TDD	SR.1.1 TDD
	3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	CR.1.1 FDD
	2,5		CR.1.1 TDD	CR.1.1 TDD
	3,6		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	CCR.1.1 FDD
	2,5		CCR.1.1 TDD	CCR.1.1 TDD
	3,6		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1	SSB.3 FR1
	2,5		SSB.3 FR1	SSB.3 FR1
	3,6		SSB.4 FR1	SSB.4 FR1
CSI-IM configuration	1,4		CSI-IM 1.1 FDD	CSI-IM 1.1 FDD
	2,5		CSI-IM 1.1 TDD	CSI-IM 1.1 TDD
	3,6		CSI-IM 2.1 TDD	CSI-IM 2.1 TDD
OCNG Patterns	1~6		OP.1	OP.1
TRS configuration	1,4		TRS.1.1 FDD	TRS.1.1 FDD
	2,5		TRS.1.1 TDD	TRS.1.1 TDD
	3,6		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1	SMTC.1
reportConfigType	1~6		periodic	periodic
reportQuantity-r16	1~6		ssb-Index-SINR-r16	ssb-Index-SINR-r16
Number of reported RS	1~6		2	2
L1-SINR reporting period	1~6		slot80	slot80
EPRE ratio of PSS to SSS	1~6	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				

N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~6	dBm/15kHz	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SSB SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s/I_{ot}$		1~6	dB	10	-3
SSB RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/SSB SCS	-84.65	-120
	NR_FDD_FR1_B				-119.5
	NR_TDD_FR1_C				-119
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118
	NR_FDD_FR1_F				-117.5
	NR_FDD_FR1_G				-117
	NR_FDD_FR1_H				-116.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-81.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5

	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
I _o Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_FR1_B				-86.78
	NR_TDD_FR1_C				-86.28
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28
	NR_FDD_FR1_F				-84.78
	NR_FDD_FR1_G				-84.28
	NR_FDD_FR1_H				-83.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6	dBm/38.16 MHz	-50.19	-81.19
	NR_FDD_FR1_B				-80.69
	NR_TDD_FR1_C				-80.19
	NR_FDD_FR1_D, NR_TDD_FR1_D				-79.69
	NR_FDD_FR1_E, NR_TDD_FR1_E				-79.19
	NR_FDD_FR1_F				-78.69
	NR_FDD_FR1_G				-78.19
	NR_FDD_FR1_H				-77.69
$\hat{E}_s / N_{oc}$		1~6	dB	10	-3
Propagation condition		1~6		AWGN	AWGN
Antenna configuration		1~6		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification					

A.4.7.7.2.3 Test Requirements

The L1-SINR measurement accuracy for SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1 of Cell 2 shall fulfil the requirements in clauses 10.1.27.2.

A.4.7.7.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR

A.4.7.7.3.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will partly verify the requirements in Clauses 9.8.4.3 and clause 10.1.27.3 for L1-SINR measurements based on CSI-RS as both CMR and IMR with the testing configurations for NR cells in Table A.4.7.7.3.1-1.

Table A.4.7.7.3.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with CSI-RS based both CMR based IMR

Config	Description
1	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band.	

A.4.7.7.3.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.4.7.7.3.2-1 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.4.7.7.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured two CSI-RS resource sets with two CSI-RS resources for each set. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB. UE is configured to perform L1-SINR measurement based on the configured CSI-RS as both CMR and IMR.

Table A.4.7.7.3.2-1: FR1 L1-SINR measurement test with CSI-RS based both CMR and IMR

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~6		freq1	freq1
Duplex mode	1,4		FDD	FDD
	2,5		TDD	TDD
	3,6		TDD	TDD
TDD Configuration	1,4		N/A	N/A
	2,5		TDDConf.1.1	TDDConf.1.1
	3,6		TDDConf.2.1	TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52
	2,5		10: N _{RB,c} = 52	10: N _{RB,c} = 52
	3,6		40: N _{RB,c} = 106	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	SR.1.1 FDD
	2,5		SR.1.1 TDD	SR.1.1 TDD
	3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	CR.1.1 FDD
	2,5		CR.1.1 TDD	CR.1.1 TDD
	3,6		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	CCR.1.1 FDD
	2,5		CCR.1.1 TDD	CCR.1.1 TDD
	3,6		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1,4		SSB.1 FR1	SSB.1 FR1
	2,5		SSB.1 FR1	SSB.1 FR1

		3,6		SSB.2 FR1	SSB.2 FR1
OCNG Patterns		1~6		OP.1	OP.1
TRS configuration		1,4		TRS.1.1 FDD	TRS.1.1 FDD
		2,5		TRS.1.1 TDD	TRS.1.1 TDD
		3,6		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration		1~6		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration		1~6		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~6		SMTC.1	SMTC.1
CSI-RS configuration as CMR		1,4		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
		2,5		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
		3,6		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
CSI-RS configuration as IMR		1,4		CSI-RS 1.3A FDD	CSI-RS 1.3A FDD
		2,5		CSI-RS 1.3A TDD	CSI-RS 1.3A TDD
		3,6		CSI-RS 2.3A TDD	CSI-RS 2.3A TDD
reportConfigType		1~6		periodic	periodic
reportQuantity-r16		1~6		cri-SINR-r16	cri-SINR-r16
nrofReportedRS		1~6		2	2
L1-RSRP reporting period		1~6		slot80	slot80
EPRE ratio of PSS to SSS		1~6	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~6	dBm/15kHz	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/CSI-RS SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114

	NR_FDD_FR1_H	3,6		-91.65	-113.5	
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5				-114	
	NR_FDD_FR1_B				-113.5	
	NR_TDD_FR1_C				-114	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112	
	NR_FDD_FR1_F				-111.5	
	NR_FDD_FR1_G				-111	
	NR_FDD_FR1_H				-110.5	
$\hat{E}_s/I_{ot}$		1~6	dB	10	0	
CSI-RS RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/CSI-RS SCS	-84.65	-117	
	NR_FDD_FR1_B				-116.5	
	NR_TDD_FR1_C				-116	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115	
	NR_FDD_FR1_F				-114.5	
	NR_FDD_FR1_G				-114	
	NR_FDD_FR1_H				-113.5	
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		-81.65	-114	
	NR_FDD_FR1_B				-113.5	
	NR_TDD_FR1_C				-114	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112	
	NR_FDD_FR1_F				-111.5	
	NR_FDD_FR1_G				-111	
	NR_FDD_FR1_H				-110.5	
I _o Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4,5	dBm/9.36 MHz	-56.28	-87.28	
	NR_FDD_FR1_B				-86.78	
	NR_TDD_FR1_C				-86.28	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28	
	NR_FDD_FR1_F				-84.78	
	NR_FDD_FR1_G				-84.28	
	NR_FDD_FR1_H				-83.78	
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3,6		dBm/38.16 MHz	-50.19	-81.19
	NR_FDD_FR1_B					-80.69
	NR_TDD_FR1_C					-80.19
	NR_FDD_FR1_D, NR_TDD_FR1_D					-79.69
	NR_FDD_FR1_E, NR_TDD_FR1_E					-79.19

	NR_FDD_FR1_F				-78.69
	NR_FDD_FR1_G				-78.19
	NR_FDD_FR1_H				-77.69
$\hat{E}_s / N_{oc}$	1~6	dB	10	0	
Propagation condition	1~6		AWGN	AWGN	
Antenna configuration	1~6		1x2	1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification					

A.4.7.7.3.3 Test Requirements

The L1-SINR measurement accuracy for CSI-RS#0+CSI-RS#2 and CSI-RS#1+CSI-RS#3 of Cell 2 shall fulfil the requirements in clauses 10.1.27.3.

A.4.7.8 CSI-RSRP

A.4.7.8.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.8.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.2.3.1 and 10.1.2.3.2 for intra-frequency CSI-RS based L3 measurements.

A.4.7.8.1.2 Test parameters

In this set of test cases all NR cells are on the same carrier frequency. Supported test configurations are shown in table A.4.7.8.1.2-1. Both absolute and relative accuracy of CSI-RSRP intra-frequency measurements are tested by using the parameters in A.4.7.8.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell.

Table A.4.7.8.1.2-1: CSI-RSRP Intra frequency CSI-RSRP supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Table A.4.7.8.1.2-2: CSI-RSRP Intra frequency test parameters

Parameter	Unit	Test 1	Test 2	Test 3
-----------	------	--------	--------	--------

			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52					
	Config 2,5		10: N _{RB,c} = 52					
	Config 3,6		40: N _{RB,c} = 106					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1,4		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2,5		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3,6		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD	-	SR.1.1 TDD	-	SR.1.1 TDD	-
	Config 3,6		SR2.1 TDD	-	SR2.1 TDD	-	SR2.1 TDD	-
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2,5		CR.1.1 TDD	-	CR.1.1 TDD	-	CR.1.1 TDD	-
	Config 3,6		CR2.1 TDD	-	CR2.1 TDD	-	CR2.1 TDD	-
Control Channel RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD	-	CCR.1.1 TDD	-	CCR.1.1 TDD	-
	Config 3,6		CCR2.1 TDD	-	CCR2.1 TDD	-	CCR2.1 TDD	-
SSB configuration	Config 1,4		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2,5		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3,6		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
CSI-RS configuration for RRM	Config 1,4		CSI-RS.RRM.FR1.1 FDD					
	Config 2,5		CSI-RS.RRM.FR1.1 TDD					
	Config 3,6		CSI-RS.RRM.FR1.2 TDD					
Time offset with Cell 2	Config 1,2,4,5	μs	-	4.7	-	4.7	-	4.7
	Config 3,6	μs	-	2.35	-	2.35	-	2.35
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3,5,6		SMTC.1					
OCNG Patterns			OP.1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz					
	Config 3,6		30kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0

EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} ^{Note2}	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15Kh Z	-106		-88		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable ^{Note 5}		-94		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} ^{Note2}	Config 1,2,4,5		dBm/SCS	-106		-88		Same as Noc/15kHz	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6						Not applicable ^{Note 5}	
		NR_FDD_FR1_B		-110.5					
		NR_TDD_FR1_C		-110					
		NR_FDD_FR1_D, NR_TDD_FR1_D		-109.5					
		NR_FDD_FR1_E, NR_TDD_FR1_E		-109					
		NR_FDD_FR1_F		-108.5					
		NR_FDD_FR1_G		-108					
		NR_FDD_FR1_H		-107.5					
	$\hat{E}_s/I_{ot}$ for SSB			dB	2.46	-5.97	2.46	-5.97	-0.01
$\hat{E}_s/I_{ot}$ for CSI-RS			dB	2.46	-5.97	2.46	-5.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$ for SSB			dB	6	1	6	1	3	0
$\hat{E}_s/N_{oc}$ for CSI-RS			dB	6	1	6	1	3	0
CSI-RSRP ^{Not e3}	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-100	-105	-82	-87	-	-
		NR_FDD_FR1_B						111.00	114.00
								-	-
								110.50	113.50

		NR_TDD_FR1_C						-	-				
		NR_FDD_FR1_D, NR_TDD_FR1_D						110.00	113.00				
		NR_FDD_FR1_E, NR_TDD_FR1_E						-	-				
		NR_FDD_FR1_F						109.50	112.50				
		NR_FDD_FR1_G						-	-				
		NR_FDD_FR1_H						108.50	111.50				
								108.00	111.00				
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6						- Not applica ble ^{Note 5}	Not applicab le ^{Note 5}	-85	-90	-	-
		NR_FDD_FR1_B										108.00	111.00
		NR_TDD_FR1_C										-	-
		NR_FDD_FR1_D, NR_TDD_FR1_D										107.50	110.50
		NR_FDD_FR1_E, NR_TDD_FR1_E										-	-
		NR_FDD_FR1_F										107.00	110.00
		NR_FDD_FR1_G										-	-
	Io ^{Note3}	Config 1,2,4,5						NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-70.09		-52.09	-80.03
NR_FDD_FR1_B			-79.53										
NR_TDD_FR1_C			-79.03										
NR_FDD_FR1_D, NR_TDD_FR1_D			-78.53										
NR_FDD_FR1_E, NR_TDD_FR1_E			-78.03										
NR_FDD_FR1_F			-77.53										
NR_FDD_FR1_G			-77.03										
Config 3,6		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	Not applicable ^{Note 5}		-51.99	-76.53						
		NR_FDD_FR1_B					-73.94						
		NR_TDD_FR1_C					-73.44						
		NR_FDD_FR1_D, NR_TDD_FR1_D					-72.94						
		NR_FDD_FR1_E, NR_TDD_FR1_E					-72.44						
		NR_FDD_FR1_F					-71.94						
		NR_FDD_FR1_G					-71.44						
		NR_FDD_FR1_H					-70.94						
						-70.44							
Propagation condition			-	AWGN									
Antenna configuration				1x2									
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.													
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.													

Note 3:	CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Subtest 1 is not used when testing with 30kHz SSB SCS
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.4.7.8.1.3 Test Requirements

The CSI-RSRP measurement accuracy for cell 2 and cell 3 shall fulfill absolute requirement in clause 10.1.2.3.1 and relative requirement in clause 10.1.2.3.2.

A.4.7.8.2 EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.8.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.4.3.1 and 10.1.4.3.2 for inter-frequency measurements with the testing configurations in Table A.4.7.8.2.1-1.

Table A.4.7.8.2.1-1: Applicable NR configurations for FR1 inter-frequency CSI-RSRP accuracy test

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations on each supported band	

A.4.7.8.2.2 Test parameters

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on a different frequency than the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.4.7.8.2.2-1 below. Both absolute and relative accuracy of CSI-RSRP inter-frequency measurements are tested by using the parameters in Table A.4.7.8.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.4.7.8.2.2-1: CSI-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN	1~6		freq1	freq2	freq1	freq2
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52		10: N _{RB,c} = 52	
	2,5		10: N _{RB,c} = 52		10: N _{RB,c} = 52	
	3,6		40: N _{RB,c} = 106		40: N _{RB,c} = 106	
Gap pattern ID			0		0	
Duplex mode	1,4		FDD		FDD	
	2,5		TDD		TDD	
	3,6		TDD		TDD	
TDD configuration	1,4		N/A		N/A	
	2,5		TDDConf.1.1		TDDConf.1.1	
	3,6		TDDConf.2.1		TDDConf.2.1	

	NR_FDD_FR1_B					-114.5	
	NR_TDD_FR1_C					-114	
	NR_FDD_FR1_D					-113.5	
	, NR_TDD_FR1_D						
	NR_FDD_FR1_E					-113	
	, NR_TDD_FR1_E						
	NF_FDD_FR1_F					-112.5	
	NR_FDD_FR1_G					-112	
	NR_FDD_FR1_H					-111.5	
N_{oc} ^{Note2}	NR_FDD_FR1_A	1,2,4,5	dBm/SS B SCS	-94.65	$(N_{oc}$ for Cell 3 +8dB)	-115	
	, NR_TDD_FR1_A						
	NOTE 5,						
	NR_FDD_FR1_B					-114.5	
	NR_TDD_FR1_C					-114	
	NR_FDD_FR1_D					-113.5	
	, NR_TDD_FR1_D						
	NR_FDD_FR1_E					-113	
	, NR_TDD_FR1_E						
	NR_FDD_FR1_F					-112.5	
	NR_FDD_FR1_G					-112	
	NR_FDD_FR1_H					-111.5	
	NR_FDD_FR1_A	3,6		-91.65	$(N_{oc}$ for C 3 +8dB)	-112.00	
	, NR_TDD_FR1_A						
	NOTE 5,						
	NR_SDL_FR1_A						
	NR_FDD_FR1_B					-112.50	
	NR_TDD_FR1_C					-112.00	
	NR_FDD_FR1_D					-111.50	
	, NR_TDD_FR1_D						
	NR_FDD_FR1_E					-111.00	
	, NR_TDD_FR1_E						
	NR_FDD_FR1_F					-110.50	
	NR_FDD_FR1_G					-110.00	
	NR_FDD_FR1_H					-110.50	
$\hat{E}_s/I_{ot}$ for SSB		1~6	dB	10	10	13	-3
$\hat{E}_s/I_{ot}$ for CSI-RS		1~6	dB	10	10	13	-3
CSI- RSRP ^{Note3}	NR_FDD_FR1_A	1,2,4,5	dBm/SC S	-84.65	(RSRP for Cell 3 +25dB)	-118.00	
	, NR_TDD_FR1_A						
	NOTE 5						
	NR_FDD_FR1_B					-117.50	
	NR_TDD_FR1_C					-117.00	
	NR_FDD_FR1_D					-116.50	
	, NR_TDD_FR1_D						
	NR_FDD_FR1_E					-116.00	
	, NR_TDD_FR1_E						
NR_FDD_FR1_F	-115.50						
NR_FDD_FR1_G	-115.00						

	NR_FDD_FR1_H					-114.50	
	NR_FDD_FR1_A	3,6		-81.65	(RSRP for Cell 3 +25dB)	-115.00	
	, NR_TDD_FR1_A						
	NOTE 5,						
	NR_FDD_FR1_B					-114.50	
	NR_TDD_FR1_C					-114.00	
	NR_FDD_FR1_D					-113.50	
	, NR_TDD_FR1_D						
	NR_FDD_FR1_E					-113.00	
	, NR_TDD_FR1_E						
	NR_FDD_FR1_F					-112.50	
	NR_FDD_FR1_G					-112.00	
	NR_FDD_FR1_H					-111.50	
Io ^{Note3}	NR_FDD_FR1_A	1,2,4,5	dBm/ 9.36MH z	-56.28	(Io for Channel 3 +19.75dB)	-85.28	
	, NR_TDD_FR1_A						
	NOTE 6,						
	NR_FDD_FR1_B					-84.78	
	NR_TDD_FR1_C					-84.28	
	NR_FDD_FR1_D					-83.78	
	, NR_TDD_FR1_D						
	NR_FDD_FR1_E					-83.28	
	, NR_TDD_FR1_E						
	NR_FDD_FR1_F	-82.78					
	NR_FDD_FR1_G	-82.28					
	NR_FDD_FR1_H	-81.78					
	NR_FDD_FR1_A	3,6	dBm/ 38.16M Hz	-50.19	(Io for Channel 3 +19.75dB)	-79.19	
	, NR_TDD_FR1_A						
	NOTE 6,						
	NR_FDD_FR1_B					-78.69	
	NR_TDD_FR1_C					-78.19	
	NR_FDD_FR1_D					-77.69	
	, NR_TDD_FR1_D						
NR_FDD_FR1_E	-77.19						
, NR_TDD_FR1_E							
NR_FDD_FR1_F	-76.69						
NR_FDD_FR1_G	-76.19						
NR_FDD_FR1_H	-75.69						
$\hat{E}_s/N_{oc}$ for SSB		1~6	dB	10	10	13	-3
$\hat{E}_s/N_{oc}$ for CSI-RS		1~6	dB	10	10	13	-3
Propagation condition		1~6	-	AWGN		AWGN	
Antenna configuration				1x2		1x2	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3:	CSI-RSRP and Io levels have been derived from other parameters for information purposes. They are not setttable parameters themselves.						

Note 4:	CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.4.7.8.2.3 Test Requirements

The CSI-RSRP measurement accuracy for Cell 2 and Cell 3 shall fulfil the Absolute requirement in clause 10.1.4.2.1 and Relative requirement in clause 10.1.4.2.2.

A.4.7.9 CSI-RSRQ

A.4.7.9.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.9.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.7.

A.4.7.9.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.4.7.9.1.2-1. The absolute accuracy of CSI-RSRQ intra-frequency measurement is test by using the parameters in Table A.4.7.9.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PCell and Cell 3 is the target cell.

Table A.4.7.9.1.2-1: CSI-RSRQ Intra frequency CSI-RSRQ supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.4.7.9.1.2-2: CSI-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52					
	Config 2,5		10: N _{RB,c} = 52					
	Config 3,6		40: N _{RB,c} = 106					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					

		Dedicated UL BWP		ULBWP.1.1					
DRX Cycle			ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4			SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5			SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6			SR2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4			CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2,5			CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6			CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Control Channel RMC	Config 1,4			CCR.1. 1 FDD	-	CCR.1. 1 FDD	-	CCR.1.1 FDD	-
	Config 2,5			CCR.1. 1 TDD		CCR.1. 1 TDD		CCR.1.1 TDD	
	Config 3,6			CCR.2. 1 TDD		CCR.2. 1 TDD		CCR.2.1 TDD	
TRS configuration	Config 1,4			TRS.1. 1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2,5			TRS.1. 1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3,6			TRS.1. 2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns				OP. 1					
Time offset with Cell 2	Config 1,2,4,5	μs	-	4.7	-	4.7	-	4.7	
	Config 3,6	μs	-	2.35	-	2.35	-	2.35	
SMTC configuration	Config 1,4		SMTC.2						
	Config 2,3,5,6		SMTC.1						
SSB configuration	Config 1,2,4,5		SSB.1 FR1						
	Config 3,6		SSB.2 FR1						
CSI-RS configuration for RRM	Config 1,4		CSI-RS.RRM.FR1.1 FDD						
	Config 2, 5		CSI-RS.RRM.FR1.1 TDD						
	Config 3, 6		CSI-RS.RRM.FR1.2 TDD						
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz						
	Config 3,6		30kHz						
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/15k Hz	-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	

	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7		-91		-	-114		
		NR_FDD_FR1_B					-113.5		
		NR_TDD_FR1_C					-113		
		NR_FDD_FR1_D, NR_TDD_FR1_D					-112.5		
		NR_FDD_FR1_E, NR_TDD_FR1_E					-112		
		NR_FDD_FR1_F					-111.5		
		NR_FDD_FR1_G					-111		
		NR_FDD_FR1_H					-110.5		
N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/SC S	-85		-101	-114		
		NR_FDD_FR1_B					-113.5		
		NR_TDD_FR1_C					-113		
		NR_FDD_FR1_D, NR_TDD_FR1_D					-112.5		
		NR_FDD_FR1_E, NR_TDD_FR1_E					-112		
		NR_FDD_FR1_F					-111.5		
		NR_FDD_FR1_G					-111		
		NR_FDD_FR1_H					-110.5		
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7		-88		-	-111		
		NR_FDD_FR1_B					-110.5		
		NR_TDD_FR1_C					-110		
		NR_FDD_FR1_D, NR_TDD_FR1_D					-109.5		
		NR_FDD_FR1_E, NR_TDD_FR1_E					-109		
		NR_FDD_FR1_F					-108.5		
		NR_FDD_FR1_G					-108		
		NR_FDD_FR1_H					-107.5		
$\hat{E}_s/I_{ot}$ for SSB			dB	-1.76		-4.7		-5.46	-5.46
$\hat{E}_s/I_{ot}$ for CSI-RS			dB	-1.76		-4.7		-5.46	-5.46
$\hat{E}_s/N_{oc}$ for SSB			dB	3	3	-2.9	-2.9	-4	-4
$\hat{E}_s/N_{oc}$ for CSI-RS			dB	3	3	-2.9	-2.9	-4	-4
CSI-RSRP Note3	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/SC S	-82	-82	-103.9	-103.9	-118	-118
		NR_FDD_FR1_B						-117.5	-117.5
		NR_TDD_FR1_C						-117	-117
		NR_FDD_FR1_D, NR_TDD_FR1_D						-116.5	-116.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-116	-116
		NR_FDD_FR1_F						-115.5	-115.5
		NR_FDD_FR1_G						-115	-115
		NR_FDD_FR1_H						-114.5	-114.5
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7		-85	-85	-	-	-115	-115
		NR_FDD_FR1_B						-114.5	-114.5

		NR_TDD_FR1_C						-114	-114
		NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5	-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-113	-113
		NR_FDD_FR1_F						-112.5	-112.5
		NR_FDD_FR1_G						-112	-112
		NR_FDD_FR1_H						-111.5	-111.5
CSI-RSRQ ^{Note3}		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D, NR_TDD_FR1_D							
		NR_FDD_FR1_E, NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
^{Note3} Io	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/ 9.36MHz	-50		-70		-83.5	
		NR_FDD_FR1_B						-83	
		NR_TDD_FR1_C						-82.5	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-82	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-81.5	
		NR_FDD_FR1_F						-81	
		NR_FDD_FR1_G						-80.5	
		NR_FDD_FR1_H						-80	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 7	dBm/ 38.16M Hz	-50		-		-77.4	
		NR_FDD_FR1_B						-76.9	
		NR_TDD_FR1_C						-76.4	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-75.9	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-75.4	
		NR_FDD_FR1_F						-74.9	
		NR_FDD_FR1_G						-74.4	
		NR_FDD_FR1_H						-73.9	
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.									
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.									
Note 3: CSI-RSRQ, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.									
Note 4: CSI-RSRQ, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.									
Note 5: NR operating band groups are as defined in Clause 3.5.2.									
Note 6: Subtest 2 is not used when testing with 30kHz SSB and CSI-RS SCS									
Note 7: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification									

A.4.7.9.1.3 Test Requirements

The CSI-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.7.

A.4.7.9.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.9.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.9.1.1 and 10.1.9.1.2 for inter frequency measurement.

A.4.7.9.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.4.7.9.2.2-1. Both absolute accuracy and relative accuracy requirements of CSI-RSRQ inter-frequency measurement are tested by using test parameters in Table A.4.7.9.2.2-2. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.4.7.9.2.2-1: CSI-RSRQ Inter frequency CSI-RSRQ supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.7.9.2.2-2: CSI-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52					
	Config 2,5		10: N _{RB,c} = 52					
	Config 3,6		40: N _{RB,c} = 106					
BWP BW	Config 1,4	MHz	10: N _{RB,c} = 52					
	Config 2,5		10: N _{RB,c} = 52					
	Config 3,6		40: N _{RB,c} = 106					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1. 1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1. 1 TDD	

	Config 3,6		SR.2.1 TDD		SR.2.1 TDD		SR.2. 1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1. 1 FDD	-
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD		CR.1. 1 TDD	
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD		CR.2. 1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1. 1 FDD	-	CCR.1. 1 FDD	-	CCR. 1.1 FDD	-
	Config 2,5		CCR.1. 1 TDD		CCR.1. 1 TDD		CCR. 1.1 TDD	
	Config 3,6		CCR.2. 1 TDD		CCR.2. 1 TDD		CCR. 2.1 TDD	
TRS configuration	Config 1,4		TRS.1. 1 FDD	-	TRS.1. 1 FDD	-	TRS. 1.1 FDD	-
	Config 2,5		TRS.1. 1 TDD		TRS.1. 1 TDD		TRS. 1.1 TDD	
	Config 3,6		TRS.1. 2 TDD		TRS.1. 2 TDD		TRS. 1.2 TDD	
CSI-RS configuration for RRM	Config 1,4		CSI-RS.RRM.FR1.1 FDD					
	Config 2,5		CSI-RS.RRM.FR1.1 TDD					
	Config 3,6		CSI-RS.RRM.FR1.2 TDD					
OCNG Patterns			OCNG pattern 1					
Time offset with Cell 2	Config 1,2,4,5	µs	-	4.7	-	4.7	-	4.7
	Config 3,6	µs	-	2.35	-	2.35	-	2.35
SMT-C configuration	Config 1,4		SMT-C.2					
	Config 2,3,5,6		SMT-C.1					
SSB configuration	Config 1,2,4,5		SSB.1 FR1					
	Config 3,6		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz					
	Config 3,6		30 kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								

N_{oc} Note2	Config 1,2,4,5	NR_FDD_FR1_A	dBm/15 kHz	-80.18	-80.18	-106	-106	-116	-116				
		NR_TDD_FR1_A						-	-115.5				
		NR_SDL_FR1_A						115.5	-115.5				
		NR_FDD_FR1_B						-	-115				
		NR_TDD_FR1_C						-115	-115				
		NR_FDD_FR1_D						-	-114.5				
		NR_TDD_FR1_D						114.5	-114.5				
		NR_FDD_FR1_E						-114	-114				
	Config 3,6	NR_TDD_FR1_E	-113	-113									
		NR_FDD_FR1_G	-113	-113									
		NR_FDD_FR1_H	-	-112.5									
			112.5	-112.5									
		NR_FDD_FR1_A	dBm/15 kHz	-86.27	-86.27	-113	-113	-116	-116				
		NR_TDD_FR1_A						-	-115.5				
		NR_SDL_FR1_A						115.5	-115.5				
		NR_FDD_FR1_B						-	-115				
NR_TDD_FR1_C	-115	-115											
NR_FDD_FR1_D	-	-114.5											
NR_TDD_FR1_D	114.5	-114.5											
NR_FDD_FR1_E	-114	-114											
N_{oc} Note2	Config 1,2,4,5	NR_TDD_FR1_E	dBm/S CS	-80.18	-80.18	-106	-106	-113	-113				
		NR_FDD_FR1_G						-	-112.5				
		NR_FDD_FR1_H						112.5	-112.5				
								-	-112.5				
		NR_FDD_FR1_A						-83.27	-83.27	-110	-110	-113	-113
		NR_TDD_FR1_A										-	-112.5
		NR_SDL_FR1_A										112.5	-112.5
		NR_FDD_FR1_B										-	-112
	NR_TDD_FR1_C	-112	-112										
	NR_FDD_FR1_D	-	-111.5										
	NR_TDD_FR1_D	111.5	-111.5										
	NR_FDD_FR1_E	-111	-111										
	Config 3,6	NR_TDD_FR1_E	dBm/S CS	-83.27	-83.27	-110	-110	-110	-110				
		NR_FDD_FR1_G						-	-109.5				
		NR_FDD_FR1_H						109.5	-109.5				
								-	-109.5				
NR_FDD_FR1_A		-						-109.5					
NR_TDD_FR1_A		109.5						-109.5					
NR_SDL_FR1_A		-						-109.5					
NR_FDD_FR1_B		-109.5						-109.5					
$\hat{E}_s / I_{ot}$ for SSB			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75				
$\hat{E}_s / I_{ot}$ for CSI-RS			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75				
$\hat{E}_s / N_{oc}$ for SSB			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75				
$\hat{E}_s / N_{oc}$ for CSI-RS			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75				

CSI-RSRP ^{Note3}	Config 1,2,4,5	NR_FDD_FR1_A	dBm/S CS	-81.93	-81.93	-107.75	-107.75	-113	-117.75	
		NR_TDD_FR1_A						-	-117.25	
		NR_SDL_FR1_A						112.5	-116.75	
		NR_FDD_FR1_B						-112	-116.25	
		NR_TDD_FR1_C						-	-115.75	
		NR_FDD_FR1_D						-111	-114.75	
		NR_TDD_FR1_D						-110	-114.25	
		NR_FDD_FR1_E						-	-	
	NR_TDD_FR1_E	-		-						
	NR_FDD_FR1_G	-		-						
	NR_TDD_FR1_G	-		-						
	NR_FDD_FR1_H	-		-						
	Config 3,6	NR_FDD_FR1_A		-85.02	-85.02	-111.75	-111.75	-110	-114.75	
		NR_TDD_FR1_A						-	-114.25	
		NR_SDL_FR1_A						109.5	-113.75	
		NR_FDD_FR1_B						-109	-113.25	
NR_TDD_FR1_C		-	-112.75							
NR_FDD_FR1_D		-	-111.75							
NR_TDD_FR1_D		-	-111.25							
NR_FDD_FR1_E		-	-							
NR_TDD_FR1_E	-	-								
NR_FDD_FR1_G	-	-								
NR_TDD_FR1_G	-	-								
NR_FDD_FR1_H	-	-								
CSI-RSRQ ^{Note3}		NR_FDD_FR1_A	dB	-14.77	-14.77	-40.59	-40.59	-	-14.76	
		NR_TDD_FR1_A						12.56	-	
		NR_FDD_FR1_B						-	-	
		NR_TDD_FR1_C						-	-	
		NR_FDD_FR1_D						-	-	
		NR_TDD_FR1_D						-	-	
		NR_FDD_FR1_E						-	-	
		NR_TDD_FR1_E						-	-	
		NR_FDD_FR1_G	-	-						
		NR_TDD_FR1_G	-	-						
		NR_FDD_FR1_H	-	-						
Io ^{Note3}	Config 1,2,4,5	NR_FDD_FR1_A	dBm/ 9.36MHz	-50	-50	-75.83	-75.83	-	-85.83	
		NR_TDD_FR1_A						83.28	-	
		NR_SDL_FR1_A						-	-85.33	
		NR_FDD_FR1_B						82.78	-	
		NR_TDD_FR1_C						-	-84.83	
		NR_FDD_FR1_D						82.28	-	
		NR_TDD_FR1_D						-	-84.33	
		NR_FDD_FR1_E						81.78	-	
	NR_TDD_FR1_E	-		-83.83						
	NR_FDD_FR1_G	81.28		-						
	NR_TDD_FR1_G	-		-82.83						
	NR_FDD_FR1_H	80.28		-						
	NR_TDD_FR1_H	-		-82.33						
	Config 3,6	NR_FDD_FR1_A		dBm/ 38.16M Hz	-50	-50	-76.73	-76.73	-	-79.73
		NR_TDD_FR1_A							77.19	-
		NR_SDL_FR1_A							-	-79.23
NR_FDD_FR1_B		76.69	-							
NR_TDD_FR1_C		-	-78.73							
NR_FDD_FR1_D		76.19	-							
NR_TDD_FR1_D		-	-78.23							
NR_FDD_FR1_E		75.69	-							

		NR_FDD_FR1_E					-	-77.73
		NR_TDD_FR1_E					75.19	
		NR_FDD_FR1_G					-	-76.73
							74.19	
		NR_FDD_FR1_H					-	-76.53
							73.69	
Propagation condition			AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-RSRQ, CSI-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: CSI-RSRQ, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: NR operating band groups are as defined in Section 3.5.2.								

A.4.7.9.2.3 Test Requirements

The CSI-RSRQ measurement accuracy shall fulfil the requirements in section 10.1.9.

A.4.7.10 CSI-SINR

A.4.7.10.1 EN-DC Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.10.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.12.

A.4.7.10.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.4.7.10.1.2-1. The absolute accuracy of CSI-SINR intra-frequency measurement is tested by using the parameters in Table A.4.7.10.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell. CSI-RS for mobility configured for Cell 2 is associated to the SSB of Cell 2, and CSI-RS for mobility configured for Cell 3 is associated to the SSB of Cell 3.

Table A.4.7.10.1.2-1: CSI-SINR Intra frequency CSI-SINR supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.7.10.1.2-2: CSI-SINR Intra frequency test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3

SSB ARFCN			freq1		freq1	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2,5		TDDConf.1.1			
	Config 3,6		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1, 4		TRS.1.1 FDD			
	Config 2, 5		TRS.1.1 TDD			
	Config 3, 6		TRS.1.2 TDD			
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2,5		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
Time offset with Cell 2	Config 1,2,4,5	μs	2.35	2.35	2.35	2.35
	Config 3,6	μs	1.17	1.17	1.17	1.17
SMTc configuration	Config 1,4		SMTc.2			
	Config 2,3,5,6		SMTc.1			
SSB configuration	Config 1,2,4,5		SSB.1 FR1			
	Config 3,6		SSB.2 FR1			
CSI-RS configuration for RRM	Config 1,4		CSI-RS.RRM.FR1.1 FDD			
	Config 2,5		CSI-RS.RRM.FR1.1 TDD			
	Config 3,6		CSI-RS.RRM.FR1.2 TDD			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15			
	Config 3,6		30			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 6}	dBm /15k Hz	-93		-116	
	NR_FDD_FR1_B				-115.5	
	NR_TDD_FR1_C				-115	

		NR_FDD_FR1_D, NR_TDD_FR1_D				-114.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-114	
		NR_FDD_FR1_F				-113.5	
		NR_FDD_FR1_G				-113	
		NR_FDD_FR1_H				-112.5	
N_{oc} ^{Note2}	Config 1,2,4,5		dBm /SC S	-93		Same as Noc for 15kHz	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 6}		-90	-113		
		NR_FDD_FR1_B			-112.5		
		NR_TDD_FR1_C			-112		
		NR_FDD_FR1_D, NR_TDD_FR1_D			-111.5		
		NR_FDD_FR1_E, NR_TDD_FR1_E			-111		
		NR_FDD_FR1_F			-110.5		
		NR_FDD_FR1_G			-110		
		NR_FDD_FR1_H			-109.5		
		$\hat{E}_s/I_{ot}$ for SSB			dB	0	-3.19
$\hat{E}_s/I_{ot}$ for CSI-RS			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s/N_{oc}$ for SSB			dB	4.54	2.66	-4	-4
$\hat{E}_s/N_{oc}$ for CSI-RS			dB	4.54	2.66	-4	-4
CSI- RSRP ^{Not e3}	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A	dBm /SC S	-88.46	-90.34	-120	-120
		NR_FDD_FR1_B				-119.5	-119.5
		NR_TDD_FR1_C				-119	-119
		NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5	-118.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-118	-118
		NR_FDD_FR1_F				-117.5	-117.5
		NR_FDD_FR1_G				-117	-117
		NR_FDD_FR1_H				-116.5	-116.5
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 6}	-85.46	-87.34	-117	-117	
		NR_FDD_FR1_B			-116.5	-116.5	
		NR_TDD_FR1_C			-116	-116	
		NR_FDD_FR1_D, NR_TDD_FR1_D			-115.5	-115.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E			-115	-115	
		NR_FDD_FR1_F			-114.5	-114.5	
		NR_FDD_FR1_G			-114	-114	
		NR_FDD_FR1_H			-113.5	-113.5	
CSI-SINR ^{Note3}		NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 6}	dB	0	-3.19	-5.46	-5.46
		NR_FDD_FR1_B					
		NR_TDD_FR1_C					
		NR_FDD_FR1_D, NR_TDD_FR1_D					

		NR_FDD_FR1_E, NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
Io ^{Note3}	Config 1,2,4,5	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm / 9.36 MHz	-57.5	-85.51	
		NR_FDD_FR1_B			-85.01	
		NR_TDD_FR1_C			-84.51	
		NR_FDD_FR1_D, NR_TDD_FR1_D			-84.01	
		NR_FDD_FR1_E, NR_TDD_FR1_E			-83.51	
		NR_FDD_FR1_F			-83.01	
		NR_FDD_FR1_G			-82.51	
		NR_FDD_FR1_H			-82.01	
	Config 3,6	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm / 38.1 6MH z	-51.41	-79.41	
		NR_FDD_FR1_B			-78.91	
		NR_TDD_FR1_C			-78.41	
		NR_FDD_FR1_D, NR_TDD_FR1_D			-77.91	
		NR_FDD_FR1_E, NR_TDD_FR1_E			-77.41	
		NR_FDD_FR1_F			-76.91	
		NR_FDD_FR1_G			-76.41	
		NR_FDD_FR1_H			-75.91	
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: CSI-SINR, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: NR operating band groups are as defined in Clause 3.5.2.						
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification						

A.4.7.10.1.3 Test Requirements

The CSI-SINR measurement accuracy shall fulfil the requirements in clause 10.1.12.

A.4.7.10.2 EN-DC Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.4.7.10.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.14.2.1 and 10.1.14.2.2 for inter-frequency measurement.

A.4.7.10.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.4.7.10.2.2-1. Both absolute accuracy and relative accuracy requirements of CSI-SINR inter-frequency measurement are tested by using test parameters in Table A.4.7.10.2.2-2. In all test cases, Cell 2 is the PCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell of which specific test parameters for this test case are specified in Table A.3.7.2.1-1. CSI-RS for mobility configured for Cell 2 is associated to the SSB of Cell 2, and CSI-RS for mobility configured for Cell 3 is associated to the SSB of Cell 3.

Table A.4.7.10.2.2-1: CSI-SINR Inter frequency CSI-SINR supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4.7.10.2.2-2: CSI-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2 freq1	Cell 3 freq2	Cell 2 freq1	Cell 3 freq2	Cell 2 freq1	Cell 3 freq2
SSB ARFCN								
Duplex mode	Config 1,4		FDD					
	Config 2,3,5,6		TDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
TRS configuration	Config 1, 4		TRS.1.1 FDD					
	Config 2, 5		TRS.1.1 TDD					
	Config 3, 6		TRS.1.2 TDD					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	

RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2,5		CR.1.1 TDD		CR.1.1 TDD			
	Config 3,6		CR.2.1 TDD		CR.2.1 TDD			
Dedicated CORESET Reference Channel	Config 1,4		CCR.1. 1 FDD	-	CCR.1. 1 FDD	-	CCR.1. 1 FDD	-
	Config 2,5		CCR.1. 1 TDD		CCR.1. 1 TDD			
	Config 3,6		CCR.2. 1 TDD		CCR.2. 1 TDD			
OCNG Patterns			OP.1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 2	Config 1,2,4,5	μs	-	2.35	-	2.35	-	2.35
	Config 3,6	μs	-	1.17	-	1.17	-	1.17
SMT-C configuration	Config 1,4		SMT-C.2					
	Config 2,3,5,6		SMT-C.1					
SSB configuration	Config 1,2,4,5		SSB.1 FR1					
	Config 3,6		SSB.2 FR1					
CSI-RS configuration for RRM	Config 1,4		CSI-RS.RRM.FR1.1 FDD					
	Config 2,5		CSI-RS.RRM.FR1.1 TDD					
	Config 3,6		CSI-RS.RRM.FR1.2 TDD					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15					
	Config 3,6		30					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} ^{Note2}	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15k Hz	-88	-108.5	-119.5		
		NR_FDD_FR1_B				-119		
		NR_TDD_FR1_C				-118.5		
		NR_FDD_FR1_D NR_TDD_FR1_D				-118		
		NR_FDD_FR1_E NR_TDD_FR1_E				-117.5		
		NR_FDD_FR1_F				-117		
		NR_FDD_FR1_G				-116.5		
		NR_FDD_FR1_H				-116		
N_{oc} ^{Note2}	Config 1,2,4,5		dBm/SC S	-88	-108.5	Same as N_{oc} for 15kHz		
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85	-105.5	-116.5		
		NR_FDD_FR1_B				-116		

		NR_TDD_FR1_C				-115.5		
		NR_FDD_FR1_D				-115		
		NR_TDD_FR1_D						
		NR_FDD_FR1_E				-114.5		
		NR_TDD_FR1_E						
		NR_FDD_FR1_F				-114		
		NR_FDD_FR1_G				-114.5		
		NR_FDD_FR1_H				-113		
$\hat{E}_s / I_{ot}$ for SSB			dB	-1.75	20	-4.0		
$\hat{E}_s / I_{ot}$ for CSI-RS			dB	-1.75	20	-4.0		
$\hat{E}_s / N_{oc}$ for SSB			dB	-1.75	20	-4.0		
$\hat{E}_s / N_{oc}$ for CSI-RS			dB	-1.75	20	-4.0		
CSI-RSRP ^{Note3}	Config 1,2,4,5	NR_FDD_FR1_A	dBm/SCS	-89.75	-88.5	-123.5		
		NR_TDD_FR1_A						
		NOTE 6						
		NR_FDD_FR1_B				-123		
		NR_TDD_FR1_C				-122.5		
		NR_FDD_FR1_D				-122		
		NR_TDD_FR1_D						
		NR_FDD_FR1_E				-121.5		
		NR_TDD_FR1_E						
		NR_FDD_FR1_F				-121		
	Config 3,6	NR_FDD_FR1_G		-120.5				
		NR_FDD_FR1_H		-120				
		NR_FDD_FR1_A		-86.75	-85.5	-120.5		
		NR_TDD_FR1_A						
		NOTE 6						
		NR_FDD_FR1_B				-120		
		NR_TDD_FR1_C				-119.5		
		NR_FDD_FR1_D				-119		
		NR_TDD_FR1_D						
		NR_FDD_FR1_E				-118.5		
		NR_TDD_FR1_E						
		NR_FDD_FR1_F				-118		
		NR_FDD_FR1_G				-117.5		
		NR_FDD_FR1_H				-117		
CSI-SINR ^{Note3}			dB			-1.75	20	-4.0
Io ^{Note3}	Config 1,2,4,5	NR_FDD_FR1_A	dBm/ 9.36MHz	-57.83	-60.5	-90.09		
		NR_TDD_FR1_A						
		NOTE 6						
		NR_FDD_FR1_B				-89.59		
		NR_TDD_FR1_C				-89.09		
		NR_FDD_FR1_D				-88.59		
		NR_TDD_FR1_D						
		NR_FDD_FR1_E				-88.09		
NR_TDD_FR1_E								
NR_FDD_FR1_F	-87.59							

Config 3,6	NR_FDD_FR1_G	dBm/ 38.16MH Z	-51.73	-54.41	-87.09
	NR_FDD_FR1_H				-86.59
	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6				-84
	NR_FDD_FR1_B				-83.5
	NR_TDD_FR1_C				-83
	NR_FDD_FR1_D NR_TDD_FR1_D				-82.5
	NR_FDD_FR1_E NR_TDD_FR1_E				-82
	NR_FDD_FR1_F				-81.5
	NR_FDD_FR1_G				-81
	NR_FDD_FR1_H				-80.5
Propagation condition		-	AWGN		
Antenna configuration		-	1x2		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3:	CSI-SINR, CSI-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4:	CSI-SINR, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5:	NR operating band groups are as defined in Clause 3.5.2.				
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification				

A.4.7.10.2.3 Test Requirements

The CSI-SINR measurement accuracy shall fulfil the requirements in clause 10.1.14.2.1 and 10.1.14.2.2.

A.4.8 Void

A.4A NE-DC test with all NR cells in FR1

A.4A.1 Signaling characteristics

A.4A.1.1 E-UTRAN PSCell addition

A.4A.1.1.1 Test purpose and environment

The purpose of this test is to verify that the LTE PSCell addition/release delay and interruption under NE-DC are within the requirements stated in clause 8.8 and clause 8.2.3.2.3 for the case when the PSCell is known by the UE at the time of addition.

Supported test configurations are shown in A.4A.1.1.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.1-1.

The test parameters for NR cell are given in Tables A.4A.1.1.1-2 and cell-specific parameters in A.4A.1.1.1-3 below. The test consists of six successive time periods with duration of T1, T2, T3, T4, T5 and T6 respectively. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (NR PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (E-UTRAN PSCell) on radio channel 2. The UE is only monitoring the PCC. During T1 only Cell1 is known to the UE.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event B1 is configured for neighbour cell (Cell2). Before the start of T2 the UE is configured with the measurement gaps (gap pattern Id # 0). The Cell2 becomes known to the UE during T2. Therefore, during T2 the UE shall report Event B1. The point in time at which the RRC message to release measurement gap is transmitted from the test system defines the start of period T3. During T3, after measurement gap is released, the test system transmits the RRC message to the UE to add PSCell on radio channel 2.

The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added. The point in time at which the RRC message to add PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

The test system shall observe the periodic reporting of CSI for PSCell during T5. The point in time at which the UE has sent PRACH to the PSCell (Cell 2) defines the start of period T5.

The test system shall send a RRC message to the UE to release PSCell (Cell 2) on radio channel 2. The RRC message to release PSCell (Cell2) shall be sent to the UE during period T5, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to release PSCell (Cell2) is received at the UE antenna connector defines the start of period T6.

Table A.4A.1.1.1-1: Applicable E-UTRA and NR configurations for NE-DC PSCell addition and Release test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4A.1.1.1-2: General Test Parameters for PSCell Addition and Release

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for NR cell and second for E-UTRAN Cell
Initial	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP (Config 1,2,4,5)	dBm	-96	Actual RSRP threshold for event B1.
	Threshold RSRP (Config 3,6)	dBm	-93	Actual RSRP threshold for event B1.
	Time to Trigger	S	0	
DRX			OFF	Continuous monitoring of primary cell
Measurement gap pattern Id			0	Gaps are configured before T2 and released before T3.
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.

T2	s	1	During this time the UE shall identify neighbour cell (cell2) and report event B1.
T3	s	3.5	During this time the test system transmits the RRC messages to release measurement gap and add PSCell.
T4	s	0.5	During this time the UE adds the PSCell.
T5	s	0.5	During this time the UE sends CSI reports for PSCell.
T6	s	0.5	During this time the UE releases the PSCell.

Table A.4A.1.1.1-3: NR Cell Specific Parameters for PSCell Addition and Release

Parameter	Unit	Config	Test
NR RF Channel Number		1,2,3,4,5,6	1
E-UTRA RF Channel Number		1,2,3,4,5,6	2
TDD configuration		1,4	Not Applicable
		2,5	TDDConf.1.1
		3,6	TDDConf.2.1
BW _{channel}	MHz	1,4	10: N _{RB,c} = 52
		2,5	10: N _{RB,c} = 52
		3,6	40: N _{RB,c} = 106
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1
PDSCH Reference measurement channel		1,4	SR.1.1 FDD
		2,5	SR.1.1 TDD
		3,6	SR.2.1 TDD
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD
		2,5	CR.1.1 TDD
		3,6	CR.2.1 TDD
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD
		2,5	CCR.1.1 TDD
		3,6	CCR.2.1 TDD
OCNG Patterns		1,2,3,4,5,6	OP.1
SSB configuration		1,2,4,5	SSB.1 FR1
		3,6	SSB.2 FR1
SMTC configuration		1,2,4,5	SMTC.1
		3,6	SMTC.1
TRS Configuration		1,4	TRS.1.1 FDD
		2,5	TRS.1.1 TDD
		3,6	TRS.1.2 TDD
CSI-RS configuration for CSI reporting		1,4	CSI-RS.1.1 FDD
		2,5	CSI-RS.1.1 TDD
		3,6	CSI-RS.2.1 TDD
reportConfigType		1,2,3,4,5,6	periodic
reportQuantity		1,2,3,4,5,6	cri-RI-PMI-CQI
CSI reporting periodicity	slot	1,2,4,5	5
		3,6	10
CSI reporting offset	slot	1,2,4,5	2
		3,6	4
EPRE ratio of PSS to SSS			
EPRE ratio of PBCH DMRS to SSS			

EPRE ratio of PBCH to PBCH DMRS	dB	1,2,3,4,5,6	0
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc}^{Note2}	dBm/15 kHz	1,2,3,4,5,6	-88
N_{oc}^{Note2}	dBm/SCS	1,2,4,5	-88
		3,6	-85
$\hat{E}_s/I_{ot}$		1,2,3,4,5,6	0
$\hat{E}_s/N_{oc}$		1,2,3,4,5,6	0
SS-RSRP ^{Note3}	dBm/SCS	1,2,4,5	-88
		3,6	-85
I _o ^{Note3}	dBm/9.36MHz	1,2,4,5	-57
	dBm/38.1MHz	3,6	-51
Propagation condition		1,2,3,4,5,6	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			

Table A.4A.1.1.1-4: E-UTRAN cell specific test parameters for PSCell Addition and Release tests

Parameter	Unit	E-UTRAN Cell					
		T1	T2	T3	T4	T5	T6
Duplex mode		FDD or TDD					
TDD special subframe configuration ^{Note1}		6					
TDD uplink-downlink configuration ^{Note1}		1					
BW _{channel}		5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100					
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD					

PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note3}	dB		
OCNG_RB ^{Note3}	dB		
N _{oc} ^{Note4}	dBm/15 kHz	N/A	-104
E _s /N _{oc}	dB	-infinite	17
E _s /I _{ot}	dB	-infinite	17
RSRP ^{Note5}	dBm/15 kHz	-infinite	-87
SCH_RP ^{Note5}	dBm/15 kHz	-infinite	-87
I _o ^{Note5}	dBm/Ch BW	N/A	-59.13+10log(N _{RB,c} /50)
Propagation Condition		AWGN	
Antenna Configuration		1x2	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.			
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.			
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 5: E _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.4A.1.1.2 Test Requirements

The UE shall transmit the PRACH to PSCell at latest 120 ms^{Note1} into T4.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T5.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T5.

The UE shall stop sending CSI reports for PSCell in at latest 20ms into T6.

Interruption on PCell during PSCell addition and release shall not exceed the values specified for NE-DC in Clause 8.2.3.2.3.

All the above test requirements shall be fulfilled in order for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 8.8 [15]:

$$T_{\text{config_EUTRAN-PSCell}} = 20\text{ms} + T_{\text{activation_time}} + 50\text{ms} + T_{\text{PCell_DU}} + T_{\text{E-UTRAN-PSCell_DU}}$$

Where:

$$T_{\text{activation_time}} = 20\text{ms}$$

$$T_{\text{PCell_DU}} = 0\text{ms}$$

$$T_{\text{E-UTRAN-PSCell_DU}} = 30\text{ms}$$

A.4A.1.2 Active BWP switch

A.4A.1.2.1 E-UTRAN PSCell – NR PCell FR1 DCI-based and Timer-based DL active BWP switch in non-DRX in synchronous NE-DC

A.4A.1.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in TS38.133 clause 8.6, and interruption requirement for E-UTRA victim cell defined in TS36.133 clause 7.36.2.6. Supported test configurations are shown in Table A.4A.1.2.1.1-1.

The test scenario comprises of one NR PCell (Cell 1), and one E-UTRA PSCell (Cell 2) as given in Table A.4A.1.2.1.1-2. Cell-specific parameters of NR PCell is specified in Table A.4A.1.2.1.1-3. below, and cell-specific parameters of E-UTRA PSCell are specified in Table A.3.7.2.1-1.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PCell, BWP-1 and BWP-2, in Cell 1 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PCell's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PCell no later than at the beginning of the DL slot right after DL slot ($i + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on PCell's BWP-2 starting from the beginning of the DL slot right after DL slot ($i + T_{BWPswitchDelay}$).

The starting time of PSCell(Cell 2) interruption due to BWP switch on PCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PCell(Cell 1).

During T3,

The time period T3 starts from the slot #j, where j is the beginning slot of the DL subframe immediately after the *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PCell's DL slot ($j + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PCell at latest at the beginning of the DL slot right after DL slot ($j + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on PCell's BWP-1 starting from the beginning of the DL slot right after DL slot ($j + T_{BWPswitchDelay}$).

The starting time of PSCell(Cell 2) interruption due to BWP switch of PCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to E-UTRA PSCell is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during BWP switch of PCell, respectively.

Table A.4A.1.2.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.4A.1.2.1.1-2: General test parameters for DL BWP switch in synchronous NE-DC

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
E-UTRA RF Channel Number		2	One E-UTRA radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
<i>bwp-InactivityTimer</i>	ms	[200]	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous NE-DC
T1	s	[0.2]	

T2	s	[0.2]	
T3	s	[0.2]	

Table A.4A.1.2.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous NE-DC

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3,5,6		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
BW _{channel}	Config 1,4		10 MHz: N _{RB,c} = 52
	Config 2,5		10 MHz: N _{RB,c} = 52
	Config 3,6		40 MHz: N _{RB,c} = 106
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,4		DLBWP.0.2 ^{Note 4}
	Config 2,5		
	Config 3,6		
Active DL BWP-1 Configuration	Config 1,4		DLBWP.1.1 ^{Note 4}
	Config 2,5		
	Config 3,6		
Active DL BWP-2 Configuration	Config 1,4		DLBWP.1.3 ^{Note 4}
	Config 2,5		
	Config 3,6		
Initial UL BWP Configuration	Config 1,4		ULBWP.0.2 ^{Note 4}
	Config 2,5		
	Config 3,6		
Active UL BWP-1 Configuration	Config 1,4		ULBWP.1.1 ^{Note 4}
	Config 2,5		
	Config 3,6		
Active UL BWP-2 Configuration	Config 1,4		ULBWP.1.3 ^{Note 4}
	Config 2,5		
	Config 3,6		
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD
	Config 3,6		CCR.2.3 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4,5		SSB.1 FR1
	Config 3,6		SSB.2 FR1
SMTc Configuration			SMTc.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			

EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} ^{Note 2}	Config 1,2,4,5	dBm/SCS	[-104]
	Config 3,6		[-101]
N_{oc} ^{Note 2}		dBm/15kHz	-104
SS-RSRP ^{Note 3}	Config 1,2,4,5	dBm/SCS	[-87]
	Config 3,6		[-90]
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I_o ^{Note 3}	Config 1,2,4,5	dBm/9.36MHz	[-59]
	Config 3,6	dBm/38.16MHz	[-61.9]
Propagation Condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

A.4A.1.2.1.2 Test Requirements

During T1, the UE shall start to send the ACK for PCell in the DL slot right after DL slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK for PCell in the DL slot right after DL slot $(j + T_{BWPswitchDelay} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start time of PCell interruption during PCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start time of PCell interruption of during PCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in TS36.133 Clause 7.36.2.6.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot $(i + T_{BWPswitchDelay} + k1)$, $(j + T_{BWPswitchDelay} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.4A.1.3 Intra-frequency handover with E-UTRAN PSCell

A.4A.1.3.1 Test purpose and environment

The purpose of this test is to verify that the intra-frequency handover with PSCell addition/change delay and interruption under NE-DC are within the requirements stated in clause 6.1.5.3 for the case when the PCell and PSCell are known by the UE.

Supported test configurations are shown in A.4A.1.3.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.1-1.

The test parameters for NR cells are given in Tables A.4A.1.3.1-2 and cell-specific parameters in A.4A.1.3.1-3 below. The test consists of three time periods with duration of T1, T2 and T3 respectively. There are two carriers and two cells on each carrier. Before the test starts the UE is connected to Cell 1 (NR PCell) on radio channel 1 (PCC) and Cell 2 (E-UTRAN PSCell) on radio channel 2. During T1 only Cell1 and Cell 2 are known to the UE.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event A3 is configured for NR neighbour cell (Cell 3), and event-triggered reporting with Event A3 is configured for neighbour cell (Cell4). The Cell3 and Cell4 become known to the UE during T2. Therefore, during T2 the UE shall report Event A3 for the PCC frequency layer and Event A3 for the PSCC frequency layer.

The test system shall send a RRC message to the UE implying handover with PSCell, with target PCell as Cell 3 and target PSCell as Cell 4 at the end of T2 duration. The point in time at which the RRC message implying handover with PSCell is received at the UE antenna connector defines the start of period T3. UE shall complete PRACH transmission to PCell and PSCell by end of T3.

Table A.4A.1.3.1-1: Applicable E-UTRA and NR configurations for NE-DC Handover with PSCell test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4A.1.3.1-2: General Test Parameters for Intra-frequency handover with PSCell

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for NR cell and second for E-UTRAN Cell
Initial	Active PCell		Cell1	PCell on RF channel number 1.
	Active PSCell		Cell2	PSCell cell on RF channel number 2.
	Neighbour PCell		Cell3	Neighbor PCell on RF channel number 1.
	Neighbour PSCell		Cell4	Neighbor PSCell on RF channel number 2.
Final Condition	Active PCell		Cell3	PCell on RF channel number 1.
	Active PSCell		Cell4	PSCell on RF channel number 2.
A3 for PCC frequency layer	A3-Offset	dB	0	
	Hysteresis	dB	0	Hysteresis for evaluation of event A3.
	Time To Trigger	s	0	Time to Trigger of event A3

A3 for PSCC frequency layer	A3-Offset	dB	0	Hysteresis for evaluation of event A3.
	Hysteresis	dB	0	Actual RSRP threshold for event A3.
	Time to Trigger	S	0	Time to Trigger of event A3
DRX			OFF	Continuous monitoring of primary cell
Measurement gap pattern Id			0	Gaps are configured before T2 and released before T3.
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	≤5	During this time the UE shall identify neighbour cell (cell3 and cell 4) and report event A3 and B1, and RRC message implying handover with PSCell at the end of this duration
T3		s	1	During this time the UE finishes PCell handover and PSCell change.

Table A.4A.1.3.1-3: NR Cell Specific Parameters for Intra-frequency handover with PSCell

Parameter	Unit	Config	Cell 1			Cell 3		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number		1,2,3,4,5,6	1					
E-UTRA RF Channel Number		1,2,3,4,5,6	2					
TDD configuration		1,4	Not Applicable					
		2,5	TDDConf.1.1					
		3,6	TDDConf.2.1					
BW _{channel}	MHz	1,4	10: N _{RB,c} = 52					
		2,5	10: N _{RB,c} = 52					
		3,6	40: N _{RB,c} = 106					
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1					
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1					
PDSCH Reference measurement channel		1,4	SR.1.1 FDD					
		2,5	SR.1.1 TDD					
		3,6	SR.2.1 TDD					
CORESET Reference Channel		1,4	CR.1.1 FDD					
		2,5	CR.1.1 TDD					
		3,6	CR.2.1 TDD					
OCNG Patterns		1,2,3,4,5,6	OP.1					
SSB configuration		1,2,4,5	SSB.1 FR1					
		3,6	SSB.2 FR1					
SMTC configuration		1,2,4,5	SMTC.1					
		3,6	SMTC.1					
TRS Configuration		1,4	TRS.1.1 FDD					
		2,5	TRS.1.1 TDD					
		3,6	TRS.1.2 TDD					
PRACH configuration			FR1 PRACH configuration 1					
PDSCH/PDCCH subcarrier spacing	kHz	1,2,4,5	15 kHz					
		3,6	30 kHz					
PUCCH/PUSCH subcarrier spacing	kHz	1,2,4,5	15 kHz					
		3,6	30 kHz					

EPRE ratio of PSS to SSS	dB	1,2,3,4,5,6	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc}^{Note2}								
N_{oc}^{Note2}	dBm/SCS	1,2,4,5	-98					
		3,6	-95					
$\hat{E}_s/I_{ot}$		1,2,3,4,5,6	8	-3.3	-3.3	-Infinity	2.36	2.36
$\hat{E}_s/N_{oc}$		1,2,3,4,5,6	8	8	8	-Infinity	11	11
SS-RSRP ^{Note3}	dBm/SCS	1,2,4,5	-90	-90	-90	-Infinity	-87	-87
		3,6	-87	-87	-87	-Infinity	-84	-84
Io ^{Note3}	dBm/9.36MHz	1,2,4,5	-61.41	-57.06	-57.06	-61.41	-57.06	-57.06
	dBm/38.1MHz	3,6	-55.31	-50.96	-50.96	-55.31	-50.96	-50.96
Propagation condition		1,2,3,4,5,6	AWGN					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.								

Table A.4A.1.3.1-4: E-UTRAN cell specific test parameters for Intra-frequency handover with PSCell

Parameter	Unit	Cell 2			Cell 4		
		T1	T2	T3	T1	T2	T3
Duplex mode		FDD or TDD					
TDD special subframe configuration ^{Note1}		6					
TDD uplink-downlink configuration ^{Note1}		1					
BW _{channel}		5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$					

PDSCH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD					
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD					
OCNG Patterns ^{Note2}		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD					
PBCH_RA	dB	0					
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB						
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note3}	dB						
OCNG_RB ^{Note3}	dB						
N _{oc} ^{Note4}	dBm/ 15 kHz	-104					
$\bar{E}_s/N_{oc}$	dB	14	14	14	-Infinity	17	17
$\bar{E}_s/I_{ot}$	dB	14	14	14	-Infinity	17	17
RSRP ^{Note5}	dBm/ 15 kHz	-90	-90	-90	-Infinity	-87	-87
SCH_RP ^{Note5}	dBm/ 15 kHz	-90	-90	-90	-Infinity	-87	-87
I _o ^{Note5}	dBm/ Ch BW	- 56.13+10log(N _{RB,c} /50)	- 56.13+10log(N _{RB,c} /50)	- 56.13+10log(N _{RB,c} /50)	N/A	- 59.13+10log(N _{RB,c} /50)	- 59.13+10log(N _{RB,c} /50)
Propagation Condition		AWGN					
Antenna Configuration		1x2					
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.						
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.						
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.						
Note 5:	E _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.4A.1.3.2 Test Requirements

The UE shall transmit the PRACH to PCell at latest $D_{\text{HOwithPSCell_PCell}} = 83\text{ms}$ into T3.

The UE shall transmit the PRACH to PSCell at latest $D_{\text{HOwithPSCell_PSCell}} = 121\text{ms}$ into T3.

The PCell handover delay, $D_{\text{HOwithPSCell_PCell}}$, is equals the applicable RRC procedure delay (16ms) defined in clause 12 in TS 38.331 [2] plus the PCell interruption time ($T_{\text{interrupt}} = 67\text{ ms}$) define in clause 6.1.5.3.2.

PSCell addition/change delay, $D_{\text{HOwithPSCell_PSCell}}$ is defined in clause 6.1.5.3.3 as below.

$$D_{\text{HOwithPSCell_PSCell}} = T_{\text{config_EUTRAN-PSCell}} + T_{\text{processing_margin}}$$

$$T_{\text{config_EUTRAN-PSCell}} = T_{\text{RRC_delay}} + T_{\text{activation_time}} + 50\text{ms} + T_{\text{E-UTRAN-PSCell_DU}}$$

Where:

$$T_{\text{processing_margin}} = 5\text{ms}$$

$$T_{\text{RRC_delay}} = 16\text{ms}$$

$$T_{\text{activation_time}} = 20\text{ms}$$

$$T_{\text{E-UTRAN-PSCell_DU}} = 30\text{ms}$$

All the above test requirements shall be fulfilled in order for the observed handover with PSCell delay to be counted as correct. The rate of correct observed handover with PSCell delay during repeated tests shall be at least 90%.

A.4A.1.4 Handover with PSCell from NE-DC to NE-DC with unknown target PSCell

A.4A.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the requirements of HO with PSCell requirements specified in clause 6.1.5.3. HO from NR FR1 to NR FR1 and E-UTRAN PSCell change are tested independently in the same test, with different end points.

A.4A.1.4.2 Test Parameters

Supported test configurations are shown in table A.4A.1.4.2-1. Both handover delay and interruption length are tested by using the parameters in table A.4A.1.4.2-2, and A.4A.1.4.2-3.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, UE is connected to Cell 1 (NR PCell) and Cell 3 (LTE PSCell 1). The UE may not have any timing information of Cell 2 at the start of T1. Starting of T1, Cell 2 becomes detectable and known to UE for entire T1 duration.

Cell 4 is turned on at the end of T1. At the start of T2, UE do not have timing information of Cell 4 (LTE PSCell 2).

During T2, UE reports Event A3 to TE and TE shall send a RRC message implying handover from Cell 1 to Cell 2 and PSCell change from Cell 3 to Cell 4 in the same RRC message implying handover with PSCell change during T2.

Start of T3 is defined as the end of the last TTI containing the RRC message implying handover with PSCell change. UE shall complete PRACH transmission to PCell and PSCell by end of T3.

Table A.4A.1.4.2-1: NE-DC test configurations for NE-DC to NE-DC HO with PSCell

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.4A.1.4.2-2: General test parameters NE-DC to NE-DC HO with PSCell

Parameter		Unit	Value	Comment
RF Channel Number			1, 2, 3	Three radio channels are used for this test. One for NR cell and second for E-UTRAN Cell
Initial conditions	Active cell		Cell 1	PCell on RF channel number 1.
	Active PSCell		Cell 3	PSCell released on RF channel number 3.
Final Condition	Active PCell		Cell2	PCell on RF channel number 2.
	Active PSCell		Cell4	PSCell released on RF channel number 3.
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T1		s	5	
T2		s	≤5	
T3		S	1	

Table A.4A.1.4.2-3: Cell specific test parameters for NR for NE-DC to NE-DC HO with PSCell test

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		40: N _{RB,c} = 106					
BWP BW	Config 1	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		40: N _{RB,c} = 106					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD					
	Config 2		SR.1.1 TDD					
	Config 3		SR2.1 TDD					
CORESET Reference Channel	Config 1		CR.1.1 FDD					
	Config 2		CR.1.1 TDD					
	Config 3		CR2.1 TDD					
TRS configuration	Config 1		TRS.1.1 FDD					

		Config 2		TRS.1.1 TDD					
		Config 3		TRS.1.2 TDD					
OCNG Patterns				OP.1					
SMTC Configuration				SMTC.1					
SSB Configuration	Config 1,2			SSB.1 FR1					
	Config 3			SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2		kHz	15 kHz					
	Config 3			30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1,2		kHz	15 kHz					
	Config 3			30 kHz					
PRACH configuration				FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP			DLBWP.0.1					
	Dedicated DL BWP			DLBWP.1.1					
	Initial UL BWP			ULBWP.0.1					
	Dedicated UL BWP			ULBWP.1.1					
EPRE ratio of PSS to SSS			dB	0					
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc}^{Note2}			dBm/15kHz	-98					
N_{oc}^{Note2}	Config 1,2		dBm/SCS	-98					
	Config 3			-95					
$\hat{E}_s/I_{ot}$			dB	8	-3.3	-3.3	- Infinity	2.36	2.36
$\hat{E}_s/N_{oc}$			dB	8	8	8	- Infinity	11	11
SSB_RP	Config 1,2		dBm/SCS	-90	-90	-90	- Infinity	-87	-87
	Config 3		dBm/SCS	-87	-87	-87	- Infinity	-84	-84
I_o^{Note3}	Config 1,2		dBm/ 9.36MHz	-61.41	-57.06	-57.06	-61.41	-57.06	-57.06
	Config 3		dBm/ 38.16MHz	-55.31	-50.96	-50.96	-55.31	-50.96	-50.96
Propagation condition			-	AWGN			AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.									
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.									
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.									

Table A.4A.1.4.2-4: E-UTRAN cell specific test parameters for EUTRA PSCell addition/change

Parameter	Unit	E-UTRAN Cell 3		E-UTRAN Cell 4	
		T1	T2		T3
Duplex mode		FDD or TDD			

TDD special subframe configuration ^{Note1}		6	
TDD uplink-downlink configuration ^{Note1}		1	
BW _{channel}		5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note3}	dB		
OCNG_RB ^{Note3}	dB		
N _{oc} ^{Note4}	dBm/15 kHz	N/A	-104
$\hat{E}_s/N_{oc}$	dB	-infinite	17
$\hat{E}_s/I_{ot}$	dB	-infinite	17
RSRP ^{Note5}	dBm/15 kHz	-infinite	-87
SCH_RP ^{Note5}	dBm/15 kHz	-infinite	-87
I _o ^{Note5}	dBm/Ch BW	N/A	-59.13+10log(N _{RB,c} /50)
Propagation Condition		AWGN	
Antenna Configuration		1x2	
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.		
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.		
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.		
Note 5:	E _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		

A.4A.1.4.3 Test Requirements

A.4A.1.4.3.1 Test Requirements for NR HO

The UE shall start to transmit the PRACH to Cell 2 less than 83 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{\text{interrupt}}$, where:

RRC procedure delay = 16 ms and is specified in clause 12 in TS 38.331 [2], RRC reconfiguration (LTE/NR SCG

establishment/ modification/ release).

$T_{\text{interrupt}}$ = 67 ms in the test. $T_{\text{interrupt}}$ is defined in clause 6.1.5.3.2.

This gives a total of 83 ms.

A.4A.1.4.3.2 Test Requirements for LTE PSCell Change

The UE shall transmit the PRACH to PSCell at latest 131 ms^{Note1} into T3.

There cannot be any interruptions on PCell during PSCell change.

All the above test requirements shall be fulfilled in order for the observed PSCell change delay to be counted as correct. The rate of correct observed PSCell change delay during repeated tests shall be at least 90%.

Note1: The PSCell change delay can be expressed as follows as specified in clause 6.1.5.3.3 of TS 38.133 is

$$D_{\text{HOwithPSCell_PSCell}} = T_{\text{config_EUTRAN-PSCell}} + 5\text{ms},$$

$$T_{\text{config_EUTRAN-PSCell}} = T_{\text{RRC_delay}} + T_{\text{activation_time}} + 50\text{ms} + T_{\text{E-UTRAN-PSCell_DU}},$$

$T_{\text{activation_time}}$ is the PSCell activation delay. If the PSCell is known, then $T_{\text{activation_time}}$ is 20ms. If the PSCell is unknown, then $T_{\text{activation_time}}$ is 30ms provided the PSCell can be successfully detected on the first attempt.

$T_{\text{E-UTRAN-PSCell_DU}}$ is the delay uncertainty in acquiring the first available PRACH occasion in the E-UTRAN PSCell. $T_{\text{E-UTRAN-PSCell_DU}}$ is up to 30ms.

Where:

$$T_{\text{RRC_delay}} = 16\text{ms}$$

$$T_{\text{activation_time}} = 30\text{ms}$$

$$T_{\text{E-UTRAN-PSCell_DU}} = 30\text{ms}$$

A.4A.2 Measurement performance

A.4A.2.1 SFTD accuracy

A.4A.2.1.1 SFTD accuracy

A.4A.2.1.1.1 Test Purpose

The purpose of this set of tests is to verify that the SFTD measurement accuracy is within the specified limits. This test will verify the requirements as specified in clause 10.21.1.1 for NE-DC SFTD measurements.

A.4A.2.1.1.2 Test Environment

Supported test configurations are shown in Table A.4A.2.1.1.2-1. In this set of test cases there are two cells on different carriers. Cell 1 is NR FR1 PCell and Cell 2 is E-UTRAN target cell. The test parameters of cell 1 are given in clause A.4A.2.1.1.2-2. The test parameters of cell 2 are given in Table A.3.7.2.1. The SFTD between PCell and target cell shall be set by the test equipment to one of the time differences in Table A.4A.2.1.1.2-3.

Table A.4A.2.1.1.2-1: Supported test configurations for SFTD accuracy

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.4A.2.1.1.2-2: Test parameters for SFTD accuracy (Cell 1)

Parameter	Config	Unit	Test 1
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2,5		10: N _{RB,c} = 52
	3,6		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
RMC CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.1 FR1
	2,5		SSB.1 FR1
	3,6		SSB.2 FR1
SMTc configuration	1~6		SMTc.1
DL BWP configuration	1~6		DLBWP.1.1
UL BWP configuration	1~6		ULBWP.1.1
OCNG Patterns	1~6		OP.1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			

EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
N_{oc} ^{Note2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1~6	dBm/15kHz	-104		
	NR_FDD_FR1_B					
	NR_TDD_FR1_C					
	NR_FDD_FR1_D, NR_TDD_FR1_D					
	NR_FDD_FR1_E, NR_TDD_FR1_E					
	NR_FDD_FR1_F					
	NR_FDD_FR1_G					
	NR_FDD_FR1_H					
N_{oc} ^{Note2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1,2,4,5	dBm/SSB SCS	-104		
	NR_FDD_FR1_B					
	NR_TDD_FR1_C					
	NR_FDD_FR1_D, NR_TDD_FR1_D					
	NR_FDD_FR1_E, NR_TDD_FR1_E					
	NR_FDD_FR1_F					
	NR_FDD_FR1_G					
	NR_FDD_FR1_H					
	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	3,6		-101		
	NR_FDD_FR1_B					
	NR_TDD_FR1_C					
	NR_FDD_FR1_D, NR_TDD_FR1_D					
	NR_FDD_FR1_E, NR_TDD_FR1_E					
	NR_FDD_FR1_F					
	NR_FDD_FR1_G					
	NR_FDD_FR1_H					
	$\hat{E}_s / I_{ot}$			1~6	dB	-3
	$\hat{E}_s / N_{oc}$			1~6	dB	-3
SS-RSRP ^{Note3}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1,2,4,5	dBm/SCS	-107		
	NR_FDD_FR1_B					
	NR_TDD_FR1_C					
	NR_FDD_FR1_D, NR_TDD_FR1_D					
	NR_FDD_FR1_E, NR_TDD_FR1_E					
	NR_FDD_FR1_F					
	NR_FDD_FR1_G					
	NR_FDD_FR1_H					
	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	3,6		-104		
	NR_FDD_FR1_B					

	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
Io ^{Note3}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1,2,4,5	dBm/9.36 MHz	-74.28
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	3,6	dBm/38.16 MHz	-68.18
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
Propagation condition		1~6		AWGN
Antenna configuration		1~6		1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification				

Table A.4A.2.1.1.2-3: Timing offsets for SFTD accuracy test

Configuration	SFN offset between PCell and PSCell	Frame boundary offset between PCell and PSCell (Ts)
1	100	-122000
2	300	-60540
3	500	1000
4	700	62540
5	900	124000

A.4A.2.1.1.3 Test Requirements

The SFTD reported by the UE consists of 2 elements, SFN offset and frame boundary offset between PCell and E-UTRAN target cell. The reported SFTD accuracy shall fulfil the requirement in clause 10.1.21.1.

A.5 EN-DC tests with one or more NR cells in FR2

A.5.1 Void

A.5.2 Void

A.5.3 RRC_CONNECTED state mobility

A.5.3.1 Void

A.5.3.2 RRC Connection Mobility Control

A.5.3.2.1 Void

A.5.3.2.2 Random Access

A.5.3.2.2.1 4-step RA type c ontention based random access test in FR2 for PSCell/SCell in EN-DC

A.5.3.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.2 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell or SCell in FR2. Supported test parameters are shown in Table A.5.3.2.2.1.1-1. UE capable of EN-DC with PSCell or SCell in FR2 needs to be tested by using the parameters in Table A.5.3.2.2.1.1-2 and Table A.5.3.2.2.1.1-3.

Table A.5.3.2.2.1.1-1: Supported test configurations for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

Config	Description
1	LTE FDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table A.5.3.2.2.1.1-2: General test parameters for contention based random access test in FR2 for PSCell/SCell in EN-DC

Parameter	Unit	Test-1	Comments
-----------	------	--------	----------

SSB Configuration	Config 1,2		SSB.1 FR2	As defined in A.3.10
CSI-RS for tracking	Config 1,2		TRS.2.1 TDD	
Duplex Mode for Cell 2	Config 1,2		TDD	
TDD Configuration	Config 1,2		TDDConf.3.1	
BW _{channel}	Config 1	MHz	100: N _{RB,C} = 24	
OCNG Pattern ^{Note 1}			OP.3	As defined in A.3.2.1.
PDSCH Reference Channel ^{Note 2}	Config 1,2		SR.3.1 TDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	As defined in A.3.1.2
Dedicated CORESET Reference Channel	Config 1,2		CCR.3.1 TDD	
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ _{UL}	As defined in TS 38.331 [2]. Δ _{UL} is derived from the uplink calibration process ^{Note 3}
Configured UE transmitted power ($P_{\text{CMAX}, f, c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
PRACH Configuration			FR2 PRACH configuration 1	As defined in A.3.8.3, with exceptions as defined below.
rsrp-ThresholdSSB		dBm	RSRP ₆₉ +Δ _{DL}	RSRP ₆₉ corresponds to -88dBm. Δ _{DL} is derived from the downlink calibration process ^{Note 4}
preambleReceivedTargetPower		dBm	-100	As defined in TS 38.331 [2]
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required. Note 3: The Δ_{UL} value is calculated as -ROUND(PPRACH0 -1), where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied, <i>preambleReceivedTargetPower</i> = -100dBm and <i>ss-PBCH-BlockPower</i> = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH. Note 4: The Δ_{DL} value is calculated as (RSRP_{REP} – RSRP₇₆), where RSRP_{REP} is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.				

Table A.5.3.2.2.1.1-3: OTA-related test parameters for contention based random access test in FR2 for PSCell/SCell in EN-DC

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.3.15.1
Assumption for UE beams ^{Note 3}			Rough	
SSB with index 0	Es ^{Note1}	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above
	SSB_RP	dBm/SCS	-80.6	

				configured <i>rsrp-ThresholdSSB</i>
	Es/Iot _{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es ^{Note1}	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot _{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 4)	
Note 1: No artificial noise is applied in this test. Note 2: Void. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 4: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

A.5.3.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.5.3.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.5.3.2.2.1.2.5 Void

A.5.3.2.2.1.2.6 Void

A.5.3.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.5.3.2.2.2 4-step RA type non-contention based random access test in FR2 for PSCell/SCell in EN-DC

A.5.3.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.2 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell or SCell in FR2. Supported test parameters are shown in Table A.5.3.2.2.2.1-1. UE capable of EN-DC with PSCell or SCell in FR2 needs to be tested by using the parameters in Table A.5.3.2.2.2.1-2 and Table A.5.3.2.2.2.1-3 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.5.3.2.2.2.1-1: Supported test configurations for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

Config	Description
--------	-------------

1	LTE FDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.5.3.2.2.1-2: General test parameters for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1,2		SSB.1 FR2	SSB.1 FR2	As defined in A.3.10
CSI-RS Configuration	Config 1,2		N/A	CSI-RS.3.1 TDD	As defined in A.3.1.4
CSI-RS for tracking	Config 1,2		TRS.2.1 TDD	TRS.2.1 TDD	
Duplex Mode for Cell 2	Config 1,2		TDD	TDD	
TDD Configuration	Config 1,2		TDDConf.3.1	TDDConf.3.1	
BW _{channel}	Config 1,2	MHz	100: N _{RB,c} = 24	100: N _{RB,c} = 24	
OCNG Pattern ^{Note 1}			OCNG pattern 1	OCNG pattern 1	As defined in A.3.2.1.
PDSCH Reference Channel ^{Note 2}	Config 1,2		SR3.1 TDD	SR3.1 TDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	CR.3.1 TDD	As defined in A.3.1.2
Dedicated CORESET Reference Channel	Config 1,2		CCR.3.1 TDD	CCR.3.1 TDD	
NR RF Channel Number			1	1	
EPRE ratio of PSS to SSS		dB	0	0	
EPRE ratio of PBCH_DMRS to SSS		dB			
EPRE ratio of PBCH to PBCH_DMRS		dB			
EPRE ratio of PDCCH_DMRS to SSS		dB			
EPRE ratio of PDCCH to PDCCH_DMRS		dB			
EPRE ratio of PDSCH_DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH_DMRS		dB			
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ _{UL}	+20 +Δ _{UL}	As defined in TS 38.331 [2]. Δ _{UL} is derived from the uplink calibration process ^{Note 3}
Configured UE transmitted power ($P_{\text{CMAX}, f, c}$)		dBm	maximum value configurable for certain power class	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
PRACH Configuration			FR2 PRACH configuration 2	FR2 PRACH configuration 3	As defined in A.3.8.3, with exceptions as defined below
rsrp-ThresholdSSB		dBm	RSRP_69 +Δ _{DL}	RSRP_69 +Δ _{DL}	RSRP_69 corresponds to -88dBm. Δ _{DL} is derived from the downlink calibration process ^{Note 4}

preambleReceivedTargetPower	dBm	-100	-100	As defined in TS 38.331 [2]
Note 1:	OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.			
Note 2:	The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.			
Note 3:	The Δ_{UL} value is calculated as $-\text{ROUND}(\text{PPRACH0} - 1)$, where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied, <i>preambleReceivedTargetPower</i> = -100dBm and <i>ss-PBCH-BlockPower</i> = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH.			
Note 4:	The Δ_{DL} value is calculated as $(\text{RSRP}_{\text{REP}} - \text{RSRP}_{76})$, where RSRP_{REP} is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x , x is treated as a positive integer value.			

Table A.5.3.2.2.1-3: OTA-related test parameters for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

Parameter		Unit	Test-1	Test-2	Comments
AoA setup			Setup 1	Setup 1	As defined in A.3.15.1
Assumption for UE beams ^{Note 3}			Rough	Rough	
SSB with index 0	E_s^{Note1}	dBm/SCS	-80.6	-80.6	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-80.6	-80.6	
	E_s/I_{otBB}	dB	21.09	21.09	Io in symbols containing SSB index 0
	Io	dBm/95.04 MHz	-56.01	-56.01	
SSB with index 1	E_s^{Note1}	dBm/SCS	-95.0	-95.0	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-95.0	-95.0	
	E_s/I_{otBB}	dB	6.69	6.69	Io in symbols containing SSB index 1
	Io	dBm/95.04 MHz	-70.41	-70.41	
Propagation Condition		-	No external noise (Note 4)	No external noise (Note 4)	
Note 1: No artificial noise is applied in this test. Note 2: void. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 4: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].					

A.5.3.2.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.5.3.2.2.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.2.1 for SSB-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-2, to test the UE behavior specified in Clause 6.2.2.2.1 for CSI-RS-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.3 2-step RA type contention based random access test in FR2 for PSCell/SCell in EN-DC

A.5.3.2.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the MsgA power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.3 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell or SCell in FR2. Supported test parameters are shown in Table A.5.3.2.2.3.1-1. UE capable of EN-DC with PSCell or SCell in FR2 needs to be tested by using the parameters in Table A.5.3.2.2.3.1-2 and Table A.5.3.2.2.3.1-3.

Table A.5.3.2.2.3.1-1: Supported test configurations for 2-step RA type contention based random access test in FR2 for PSCell/SCell in EN-DC

Config	Description
1	LTE FDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table A.5.3.2.2.3.1-2: General test parameters for 2-step RA type contention based random access test in FR2 for PSCell/SCell in EN-DC

Parameter	Unit	Test-1	Comments
SSB Configuration	Config 1,2	SSB.1 FR2	As defined in A.3.10
Duplex Mode for Cell 2	Config 1,2	TDD	
TDD Configuration	Config 1,2	TDDConf.3.1	
BW _{channel}	Config 1	MHz	100: NRB,c = 24
OCNG Pattern ^{Note 1}		OP.3	As defined in A.3.2.1.
PDSCH Reference Channel ^{Note 2}	Config 1,2	SR.3.1 TDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1,2	CR.3.1 TDD	As defined in A.3.1.2
RMC CORESET Reference Channel	Config 1,2	CCR.3.1 TDD	
NR RF Channel Number		1	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH_DMRS to SSS	dB		
EPRE ratio of PBCH_DMRS to SSS	dB		
EPRE ratio of PDCCH_DMRS to SSS	dB		
EPRE ratio of PDCCH_DMRS to SSS	dB		
EPRE ratio of PDSCH_DMRS to SSS	dB		

EPRE ratio of PDSCH to PDSCH_DMRS	dB		
ss-PBCH-BlockPower	dBm/ SCS	+20 + Δ UL	As defined in TS 38.331 [2]. Δ UL is derived from the uplink calibration process Note 3
Configured UE transmitted power ($P_{\text{CMAX}, f, c}$)	dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
MsgA Configuration		FR2 MsgA configuration 1	As defined in A.3.20.3.1, with exceptions as defined below.
<i>msgA-RSRP-ThresholdSSB</i>	dBm	RSRP_69 + Δ DL	RSRP_69 corresponds to -88dBm. Δ DL is derived from the downlink calibration process Note 4
<i>msgA-PreambleReceivedTargetPower</i>	dBm	-100	As defined in TS 38.331 [2]
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required. Note 3: The ΔUL value is calculated as $-\text{ROUND}(\text{PMsgA0} - 1)$, where PMsgA0 is the measured first MsgA PRACH power with -80.6dBm/SCS applied, <i>msgA-PreambleReceivedTargetPower</i> = -100dBm and <i>ss-PBCH-BlockPower</i> = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send MsgA. Note 4: The ΔDL value is calculated as $(\text{RSRP}_{\text{REP}} - \text{RSRP}_{76})$, where RSRP_REP is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.			

Table A.5.3.2.2.3.1-3: OTA-related test parameters for 2-step RA type contention based random access test in FR2 for PSCell/SCell in EN-DC

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.3.15.1
Assumption for UE beams ^{Note 2}			Rough	
SSB with index 0	E_s ^{Note1}	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured <i>msgA-RSRP-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-80.6	
	E_s/I_{otBB}	dB	21.09	
	I_o	dBm/95.04 MHz	-56.01	I_o in symbols containing SSB index 0
SSB with index 1	E_s ^{Note1}	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured <i>msgA-RSRP-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-95.0	
	E_s/I_{otBB}	dB	6.69	
	I_o	dBm/95.04 MHz	-70.41	I_o in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 3)	
Note 1: No artificial noise is applied in this test. Note 2: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

A.5.3.2.2.3.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.5.3.2.2.3.2.1 MsgA Transmission

To test the UE behaviour specified in Clause 6.2.2.3.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB*.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA preamble transmission shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA PRACH power with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA PRACH and MsgA PUSCH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.3.2.2 MsgB Reception

To test the UE behaviour specified in Clause 6.2.2.3.1.2 the System Simulator shall transmit a MsgB with successRAR containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit an ACK if the MsgB with a successRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble and if the Contention Resolution is successful.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgBs contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA preamble transmission shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA PRACH power with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.3.2.3 No MsgB Reception

To test the UE behaviour specified in clause 6.2.2.3.1.3 the System Simulator shall transmit a MsgB with successRAR containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the RA Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA preamble transmission shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as

the first MsgA PRACH power with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA PRACH and MsgA PUSCH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.4 2-step RA type non-contention based random access test in FR2 for PSCell/SCell in EN-DC

A.5.3.2.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the MsgA power settings and timing are within specified limits. This test will verify the requirements in clause 6.2.2.3 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell or SCell in FR2. Supported test parameters are shown in Table A.5.3.2.2.4.1-1. UE capable of EN-DC with PSCell or SCell in FR2 needs to be tested by using the parameters in Table A.5.3.2.2.4.1-2 and Table A.5.3.2.2.4.1-3 for SSB-based non-contention based random access test.

Table A.5.3.2.2.4.1-1: Supported test configurations for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

Config	Description
1	LTE TDD, NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.5.3.2.2.4.1-2: General test parameters for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

Parameter	Unit	Test-1	Comments
SSB Configuration	Config 1	SSB.1 FR2	As defined in A.3.10
Duplex Mode for Cell 2	Config 1	TDD	
TDD Configuration	Config 1	TDDConf.3.1	
BW _{channel}	Config 1	100: N _{RB,C} = 24	
OCNG Pattern ^{Note 1}		OCNG pattern 1	As defined in A.3.2.1.
PDSCH Reference Channel ^{Note 2}	Config 1	SR3.1 TDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1	CR.3.1 TDD	As defined in A.3.1.2
RMC CORESET Reference Channel	Config 1	CCR.3.1 TDD	
NR RF Channel Number		1	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH_DMRS to SSS	dB		
EPRE ratio of PBCH to PBCH_DMRS	dB		
EPRE ratio of PDCCH_DMRS to SSS	dB		
EPRE ratio of PDCCH to PDCCH_DMRS	dB		
EPRE ratio of PDSCH_DMRS to SSS	dB		
EPRE ratio of PDSCH to PDSCH_DMRS	dB		

ss-PBCH-BlockPower	dBm/ SCS	+20 + Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink calibration process ^{Note 3}
Configured UE transmitted power ($P_{C_{MAX}, f, c}$)	dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
MsgA Configuration		FR2 MsgA configuration 2	As defined in A.3.20.3.2, with exceptions as defined below
msgA-RSRP-ThresholdSSB	dBm	RSRP_69 + Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process ^{Note 4}
preambleReceivedTargetPower	dBm	-100	As defined in TS 38.331 [2]
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required. Note 3: The Δ_{UL} value is calculated as $-\text{ROUND}(\text{PMsgA0} - 1)$, where PMsgA0 is the measured first MsgA PRACH power with -80.6dBm/SCS applied, <i>msgA-PreambleReceivedTargetPower</i> = -100dBm and <i>ss-PBCH-BlockPower</i> = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send MsgA. Note 4: The Δ_{DL} value is calculated as $(\text{RSRP}_{\text{REP}} - \text{RSRP}_{76})$, where RSRP_REP is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.			

Table A.5.3.2.4.1-3: OTA-related test parameters for non-contention based random access test in FR2 for PSCell/SCell in EN-DC

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.3.15.1
Assumption for UE beams ^{Note 2}			Rough	
SSB with index 0	Es ^{Note1}	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured msgA-RSRP-ThresholdSSB
	SSB_RP	dBm/SCS	-80.6	
	Es/IotBB	dB	21.09	Io in symbols containing SSB index 0
	Io	dBm/95.04 MHz	-56.01	
SSB with index 1	Es ^{Note1}	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured msgA-RSRP-ThresholdSSB
	SSB_RP	dBm/SCS	-95.0	
	Es/IotBB	dB	6.69	Io in symbols containing SSB index 1
	Io	dBm/95.04 MHz	-70.41	
Propagation Condition		-	No external noise (Note 3)	
Note 1: No artificial noise is applied in this test.				

Note 2:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 3:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].

A.5.3.2.2.4.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.5.3.2.2.4.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.2.1, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA PRACH on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA PRACH power with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.4.2.3 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.2.2 the System Simulator shall transmit a MsgB containing a fallbackRAR MAC subPDU.

The UE shall fallback to the 4-step RA type by transmitting the msg3 containing the payload of MsgA PUSCH and monitoring contention resolution as described in clause 8.2A in TS 38.213 [3].

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA PRACH power with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA and msg3 transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.2.4.2.4 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.2.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA PRACH power with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.5.3.2.3 Void

A.5.3.3 Handover with PSCell with known FR2 target PSCell

A.5.3.3.1 Test purpose and environment

The purpose of this test is to verify that the NR PSCell change delays in handover with PSCell from EN-DC to EN-DC are within the requirements stated in clause 5.8 of TS 36.133 [15] for the case when the source PSCell is in FR1 and the target PSCell in FR2 is known by the UE at the time of handover with PSCell.

Supported test configurations are shown in A.5.3.3.1-1. The test parameters for the E-UTRA cells are given in Table A.3.7.2.2-1. The E-UTRA Cell 1 will handover to E-UTRA Cell 2 in this test case. The test parameters for NR cells are given in Tables A.5.3.3.1-2, cell-specific parameters in A.5.3.3.1-3 and OTA parameters in A.5.3.3.1-4 below. The test consists of three successive time periods with duration of T1, T2 and T3. There are four carriers each with one cell. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on E-UTRA and Cell 4 (SCell) on NR. The UE is monitoring the PCell and PSCell.

The test system shall send a RRC message to the UE to handover with PSCell (target PCell Cell 2, target PSCell Cell 4). The RRC message (to handover with PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added. The RRC message to handover with PSCell shall be sent to the UE during period T1. The point in time at which the RRC message to handover with PSCell (Cell2, Cell 4) is received at the UE antenna connector defines the start of period T2.

The test system shall observe the periodic reporting of CSI for the target PSCell during T3. The point in time at which the UE has sent PRACH to the target PSCell (Cell 4) defines the start of period T3.

Table A.5.3.3.1-1: Supported test configurations for Handover with PSCell

Configuration	Description
1	Cell 1 LTE FDD, Cell 2 LTE FDD, Cell 3 NR FDD 15kHz SSB SCS, 10MHz bandwidth, Cell 4 NR TDD 120kHz SSB SCS, 100MHz bandwidth
2	Cell 1 LTE FDD, Cell 2 LTE FDD, Cell 3 NR TDD 15kHz SSB SCS, 10MHz bandwidth, Cell 4 NR TDD 120kHz SSB SCS, 100MHz bandwidth
3	Cell 1 LTE FDD, Cell 2 LTE FDD, Cell 3 NR TDD 30kHz SSB SCS, 40MHz bandwidth, Cell 4 NR TDD 120kHz SSB SCS, 100MHz bandwidth
4	Cell 1 LTE TDD, Cell 2 LTE TDD, Cell 3 NR FDD 15kHz SSB SCS, 10MHz bandwidth, Cell 4 NR TDD 120kHz SSB SCS, 100MHz bandwidth
5	Cell 1 LTE TDD, Cell 2 LTE TDD, Cell 3 NR TDD 15kHz SSB SCS, 10MHz bandwidth, Cell 4 NR TDD 120kHz SSB SCS, 100MHz bandwidth

6	Cell 1 LTE TDD, Cell 2 LTE TDD, Cell 3 NR TDD 30kHz SSB SCS, 40MHz bandwidth, Cell 4 NR TDD 120kHz SSB SCS, 100MHz bandwidth
Note:	The UE is only required to be tested in one of the supported test configurations

Table A.5.3.3.1-2: General Test Parameters for Handover with PSCell

Parameter		Unit	Value	Comment
RF Channel Number			1, 2,3,4	Two E-UTRAN radio channel (1,2) and two NR radio channel (3,4) are used for this test
Initial Condition	Active PCell		Cell 1	PCell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.1
	Neighbour Cell		Cell 2	Neighbour cell on E-UTRAN RF channel number 2. As specified in clause A.3.7.2.1
	Active PSCell		Cell 3	PSCell on NR RF channel number 3.
	Neighbour Cell		Cell 4	Neighbour cell on NR RF channel number 4.
Final Condition	Active PCell		Cell 2	
	Neighbour Cell		Cell 1	
	Active PSCell		Cell 4	
	Neighbour Cell		Cell 3	
Access Barring Information			Not Sent	No additional delays in random access procedure.
DRX			OFF	Continuous monitoring of primary cell
PRACH configuration on Cell 4			FR2 configuration 2	Captured in A.3.8.3.2
Cell-individual offset for cells on E-UTRAN RF channel		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR RF channel		dB	0	Individual offset for cells on second component carrier
T1		s	1	During this time the PCell and PSCell shall be known and SCells configured and detected.
T2		s	0.5	During this time the UE change the PSCell.
T3		s	1	During this time the UE sends CSI reports for PSCell.

Table A.5.3.3.1-3: Cell specific test parameters for Handover with PSCell

Parameter		Unit	Cell 3			Cell 4		
			T1	T2	T3	T1	T2	T3
SSB ARFCN			Freq1			Freq2		
Duplex mode	Config 1,4		FDD			TDD		
	Config 2,3,5,6		TDD			TDD		
TDD configuration	Config 1,4		Not Applicable			TDDConf.3.1		
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
BW _{channel}	Config 1,4	MHZ	10: N _{RB,c} = 52			100: N _{RB,c} = 66		
	Config 2,5		10: N _{RB,c} = 52					
	Config 3,6		40: N _{RB,c} = 106					
Data RBs allocated	Config 1,4		52			66		
	Config 2,5		52					
	Config 3,6		106					
DL initial BWP configuration	Config 1~6		DLBWP.0.1					
DL dedicated BWP configuration	Config 1~6		DLBWP.1.1					
UL initial BWP configuration	Config 1~6		ULBWP.0.1					

UL dedicated BWP configuration	Config 1~6		ULBWP.1.1	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.3.1 TDD
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.3.1 TDD
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD	
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.3.1 TDD
	Config 2,5		CCR.1.1 TDD	
	Config 3,6		CCR.2.1 TDD	
OCNG Patterns			OP.1	
SMTc configuration			SMTc.1	
TCI state			NA	TCI.State.0
TRS configuration	Config 1,4		TRS.1.1 FDD	TRS.2.1 TDD
	Config 2,5		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD	
SSB configuration	Config 1,2,4,5		SSB.1 FR1	SSB.1 FR2
	Config 3,6		SSB.2 FR1	
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	CSI-RS.3.1 TDD
	Config 2,5		CSI-RS.1.1 TDD	
	Config 3,6		CSI-RS.2.1 TDD	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15kHz	120kHz
	Config 3,6		30kHz	
reportConfigType	Config 1~6		N/A	Periodic
reportQuantity	Config 1~6		N/A	cri-RI-PMI-CQI
CSI reporting periodicity	Config 1~6	slot	N/A	40
CSI reporting offset	Config 1~6	slot	N/A	4
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition			NA Link only, see clause A.3.7A	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.5.3.3.1-4: OTA related test parameters for Handover with PSCell

Parameter	Unit	Cell 3			Cell 4		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		NA Link only, see clause A.3.7A			Setup 1 according to clause A.3.15.1		
Assumption for UE beams ^{Note 5}					Rough		
N_{oc} ^{Note1}	dBm/15kHz				-104.7		
N_{oc} ^{Note1}	Config 1,2,4,5				-95.7		
	Config 3,6						
SSB_RP ^{Note2}	Config 1,2,4,5				-88.7		
	Config 3,6						

$\hat{E}_s/N_{oc}$	Config 1~12	dB		7
$\hat{E}_s/I_{ot}$ ^{Note2}		dB		7
I_o ^{Note2}	Config 1~12	dBm/ChBw ^N _{ote3,Note4}		-58.92
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: E_s/I_{ot}, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 4: ChBW is 94.04 MHz for Cell4, 9.36 MHz for Cell 3 in configurations 1,2,4,5,7,8,10,11, 38.1 MHz in configurations 3,6,9,12. Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.3.3.2 Test Requirements

The UE shall transmit the PRACH to PSCell at latest 107 ms^{Note1} into T2.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T3.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T3

All the above test requirements shall be fulfilled for the observed PSCell change delay to be counted as correct. The rate of correct observed PSCell change delay during repeated tests shall be at least 90%.

Note1: The PSCell change delay can be expressed as follows as specified in clause 5.8.1.2 of TS 36.133 [15]:

$$D_{HOwithPSCel_PSCell} = T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{PSCell_DU} + T_{PCell_DU} + 2 \text{ ms}$$

Where:

$$T_{RRC_delay} = 20 \text{ ms}$$

$$T_{processing} = 45 \text{ ms}$$

$$T_{search} = 0 \text{ ms}$$

$$T_{\Delta} = 20 \text{ ms}$$

$$T_{PSCell_DU} = 1*10+10 = 20 \text{ ms}$$

$$T_{PCell_DU} = 0 \text{ ms}$$

A.5.5.3.3 void

A.5.5.3.4 void

A.5.5.3.5 void

A.5.5.3.6 void

A.5.4 Timing

A.5.4.1 UE transmit timing

A.5.4.1.1 NR UE Transmit Timing Test for FR2

A.5.4.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeB and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2.

Supported test configurations are shown in Table 5.4.1.1.1-1.

Table A.5.4.1.1.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
2	LTE TDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz

The test consists of E-UTRA PCell and NR PSCell. The configuration for E-UTRA is given in A.3.7.2.1. Tables A.5.4.1.1.1-2 and A.5.4.1.1.1-2A define the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.5.4.1.1.1-3.

Table A.5.4.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2	Band Group
SSB ARFCN		1,2	Freq1	Freq1	
Duplex Mode		1,2	TDD		
TDD configuration		1,2	TDDConf.3.1		
BW _{channel}	MHz	1,2	100: N _{RB,c} = 66		
Data RBs allocated		1,2	66		
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1		
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1		
TRS Configuration		1,2	TRS.2.1 TDD		
PDSCH/PDCCH TCI state		1,2	TCI.State.2		
DRx Cycle	ms	1,2	N/A	DRX.8 ^{Note5}	
PDSCH Reference measurement channel		1,2	SR.3. 3 TDD		
RMSI CORESET Reference Channel		1,2	CR.3. 2 TDD		
Dedicated CORESET Reference Channel		1,2	CCR.3.7 TDD		
OCNG Patterns		1,2	O P. 1		
SSB Configuration		1,2	SSB.4 FR2		
SMTC Configuration		1,2	SMTC.1		
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120		
EPRE ratio of PSS to SSS	dB	1,2	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					

EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition		1,2	AWGN	
SRS Config		1,2	SRSCConf.1 ^{Note6}	SRSCConf.2 ^{Note6}
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void Note 5: DRx related parameters are given in Table A.3.3.8-1 Note 6: SRS configs are given in Table A.5.4.1.1.1-3				

Table A.5.4.1.1.1-2A: OTA related test parameters

Parameter	Unit	Test 1	Test 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 6}		Fine	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-112	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-100	
$\hat{E}_s/N_{oc}$	dB	4	
SSB_RP ^{Note2}	dBm/SCS ^{Note4}	-99	
$\hat{E}_s/I_{ot}$	dB	4	
Io ^{Note2}	dBm/95.04 MHz ^{Note4}	-68.5	
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 2:	SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 3:	Void		
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone		
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone		
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation		

Table A.5.4.1.1.1-3: SRS Configuration for Timing Accuracy Test

	Field	SRSCConf.1	SRSCConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	

SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	17	17	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1,0	sl2560,4	Offset to align with DRx periodicity
	sequenceId	0	0	Any 10 bit number

Table A.5.4.1.1.1-4: Void

A.5.4.1.1.2 Test requirements

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test

- 1) Set up E-UTRA PCell according to parameters given in Table A.3.7.2.2-1 and setup NR PSCell according to parameters given in Table A.5.4.1.1.1-1.
- 2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.
 - a. The N_{TA} offset value (in T_c units) is 13792
 - b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1
- 3) The test system shall adjust the timing of the DL path by values given in Table A.5.4.1.1.2-1

Table A.5.4.1.1.2-1 Adjustment Value for DL Timing

SCS of SSB signals (kHz)	Adjustment Value	
	Test1	Test2
240	$+8 \times 64 T_c$	$+4 \times 64 T_c$

- 4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Clause 7.1.2 Table 7.1.2.1-1 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first path (in time) of DL SSB used by the UE to determine downlink timing is received from the reference cell at the UE antenna. Skip this step for test 2 with DRX configured.

- 5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first path (in time) of DL SSB used by the UE to determine downlink timing is received from the reference cell at the UE antenna. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment

A.5.4.2 UE timer accuracy

A.5.4.3 Timing advance

A.5.4.3.1 EN-DC FR2 timing advance adjustment accuracy

A.5.4.3.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.5.4.3.1.2 Test Parameters

Supported test configurations are shown in table A.5.4.3.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.5.4.3.1.2-2, A.5.4.3.1.2-3, A.5.4.3.1.2-3A and A.5.4.3.1.2-4. The configuration of Cell 1 (LTE PCell) is specified in clause A.3.7.2.1.

In all test cases, two cells are used. Cell 1 is the PCell in the primary Timing Advance Group (pTAG) and cell 2 is the PSCell in the secondary Timing Advance Group (sTAG). Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands for sTAG are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.5.4.3.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured for PSCell in sTAG.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element for sTAG, as specified in clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance for sTAG used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value specified in table A.5.4.3.1.2-2. This value shall result in changes of the timing advance for sTAG used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in clause 7.3.2.1, the UE adjusts its uplink timing at slot $n+k$ for a timing advance command received in slot n . This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in clause 5.2 in TS 38.321, shall be configured so that it does not expire in the duration of the test.

Table A.5.4.3.1.2-1: Timing advance supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.4.3.1.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
-----------	------	-------	---------

RF channel number		Cell 1: 1 Cell 2: 2	1 for E-UTRAN PCell 2 for NR PSCell
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 120 kHz SCS $N_{TA_new} = N_{TA_old} + 1024 \cdot T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.5.4.3.1.2-3: Cell specific test parameters for timing advance

Parameter	Unit	Test1	
		T1	T2
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,C} = 66	
BWP BW	MHz	100: N _{RB,C} = 66	
DRx Cycle	ms	Not Applicable	
PDSCH Reference measurement channel		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	
Dedicated CORESET Reference Channel		CCR.3.1 TDD	
TRS configuration		TRS.2.1 TDD	
PDSCH/PDCCH TCI state		TCI.State.2	
OCNG Patterns		OCNG pattern 1	
SMTC configuration		SMTC.1	
SSB configuration		SSB.3 FR2	
PDSCH/PDCCH subcarrier spacing	kHz	120 kHz	
PUCCH/PUSCH subcarrier spacing	kHz	120 kHz	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation condition	-	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.5.4.3.1.2-3A: OTA related test parameters

Parameter	Unit	Test 1	
		T1	T2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 6}		Fine	

N_{oc}^{Note1}	dBm/15kHz ^{Note4}	-112
N_{oc}^{Note1}	dBm/SCS ^{Note3}	-103
$\hat{E}_s / N_{oc}$	dB	4
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-99
$\hat{E}_s / I_{ot}$	dB	4
I_o^{Note2}	dBm/95.04 MHz ^{Note4}	-68.5
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation		

Table A.5.4.3.1.2-4: Sounding Reference Symbol Configuration for timing advance

Field	Value	Comment
c-SRS	16	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=4	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.5.4.3.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value for PSCell in sTAG to the transmission timing at the designated activation time i.e. $k+1$ slots after the reception of the timing advance command, where $k = 11$.

The Timing Advance adjustment accuracy for PSCell in sTAG shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.5.5 Signaling characteristics

A.5.5.1 Radio link Monitoring

In the following clause, any uplink signal transmitted by the UE is used for detecting the In-/Out-of-Sync state of the UE. In terms of measurement, the uplink signal is verified on the basis of the UE output power:

Editor note: The metric for the detection of the UE UL transmitted signal by the TE is FFS.

A.5.5.1.1 Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with SSB-based RLM RS in non-DRX mode

A.5.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.5.5.1.1.1-1. The test parameters are given in Tables A.5.5.1.1.1-2, A.5.5.1.1.1-3, and A. 5.5.1.1.1-4 below. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-2. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.5.5.1.1.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure A.5.5.1.1.1-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.5.5.1.1.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	FDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.1.1-2: General test parameters for FR2 out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 2		TDD
BW _{channel}	Config 1, 2		100: N _{RB,C} = 66
Data RBs allocated	Config 1, 2		24
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
TDD Configuration	Config 1, 2		TDDConf.3.1

RMSI CORESET Reference Channel	Config 1, 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.3.4 TDD
SSB Configuration	Config 1, 2		SSB.1 FR2
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		120 KHz
PRACH Configuration	Config 1, 2		Table A.3.8.3.1
SSB index assigned as RLM RS	Config 1, 2		0,1
OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1, 2		TRS.2.1 TDD
T1		s	0.2
T2		s	9.68
T3		s	9.68
D1		s	9.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			
Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.5.5.1.1.1-3: OTA related cell specific test parameters for FR2 (Cell 2) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter	Unit	Test 1					
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 defined in A.3.15					
		AoA1			AoA2		
Assumption for UE beams ^{Note 5}		Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS	dB	4					
EPRE ratio of PDCCH to PDCCH DMRS	dB						
EPRE ratio of PBCH DMRS to SSS	dB						

EPRE ratio of PBCH to PBCH DMRS		dB	0			Not sent		
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
ssb-Index 0 SNR	Config 1, 2	dB	2 ^{Note 6}	-6 ^{Note 6}	-15			
ssb-Index 1 SNR	Config 1, 2		Not sent			2 ^{Note 6}	-15	-15
N_{oc}	Config 1, 2	dBm/ 15kHz	-92.1			-92.1		
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure A.5.5.1.1.1-2					
Propagation condition			TDL-A 30ns 75Hz			TDL-A 30ns 75Hz		
Note 1:	OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 4:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.							
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation							
Note 6:	This value allows up to 1dB degradation from applied SNR to UE baseband							

Table A.5.5.1.1.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. (Ensure that RLM RS is partially overlapped with measurement gap).	

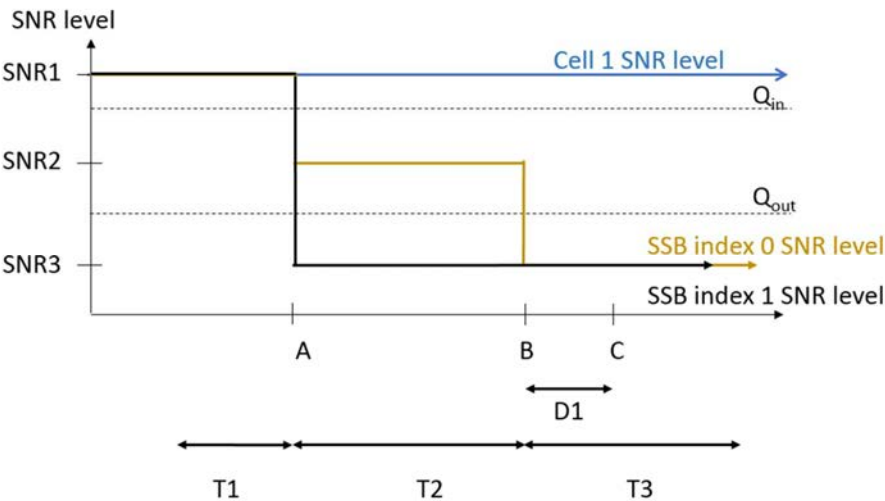


Figure A.5.5.1.1.1-1: SNR variation for out-of-sync testing

Table A.5.5.1.2.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	FDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.2.1-2: General test parameters for FR2 in-sync testing in non-DRX mode

Parameter		Unit	Value Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 2		TDD
BW _{channel}	Config 1, 2		100: N _{RB,C} = 66
Data RBs allocated	Config 1, 2		24
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
TDD Configuration	Config 1, 2		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1, 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.3.1 TDD
SSB Configuration	Config 1, 2		SSB.1 FR2
SMTC Configuration	Config 1, 2		SMTC.3
PDSCH/PDCCH subcarrier spacing	Config 1, 2		120 KHz
PRACH Configuration	Config 1, 2		Table A.3.8.3.1
SSB index assigned as RLM RS	Config 1, 2		0,1
OCNG parameters			OP.5
CP length			Normal
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size

	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer	ms		4000
T311 timer	ms		1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity	slot		40
CSI reporting offset	slot		4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1, 2		TRS.2.1 TDD
T1	s		0.2
T2	s		0.2
T3	s		1.88
T4	s		0.2
T5	s		3.84
D1	s		3.8
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			
Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.5.5.1.2.1-3: OTA related cell specific test parameters for FR2 (Cell 2) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1									
			T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
AoA setup			Setup 3 defined in A.3.15									
			AoA1					AoA2				
Assumption for UE beams ^{Note 5}			Rough					Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0					Not sent				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0									
EPRE ratio of PBCH DMRS to SSS		dB										
EPRE ratio of PBCH to PBCH DMRS		dB										
EPRE ratio of PSS to SSS		dB										
EPRE ratio of PDSCH DMRS to SSS		dB										
EPRE ratio of PDSCH to PDSCH DMRS		dB										
EPRE ratio of OCNG DMRS to SSS		dB										
EPRE ratio of OCNG to OCNG DMRS		dB										
ssb-Index 0 SNR	Config 1, 2	dB	2 ^{Note 6}	-6 ^{Note 6}	-15	-15	-15					
ssb-Index 1 SNR	Config 1, 2		Not sent					2 ^{Note 6}	-15	-15	-4.5	2 ^{Note 6}
N _{oc}	Config 1, 2	dBm/15KH z	-92.1					-92.1				

Time multiplexing of the downlink transmissions from each AoA		Defined in Figure A.5.5.1.2.1-2	
Propagation condition		TDL-A 30ns 75Hz	TDL-A 30ns 75Hz
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6. Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband			

Table A.5.5.1.2.1-4: Void

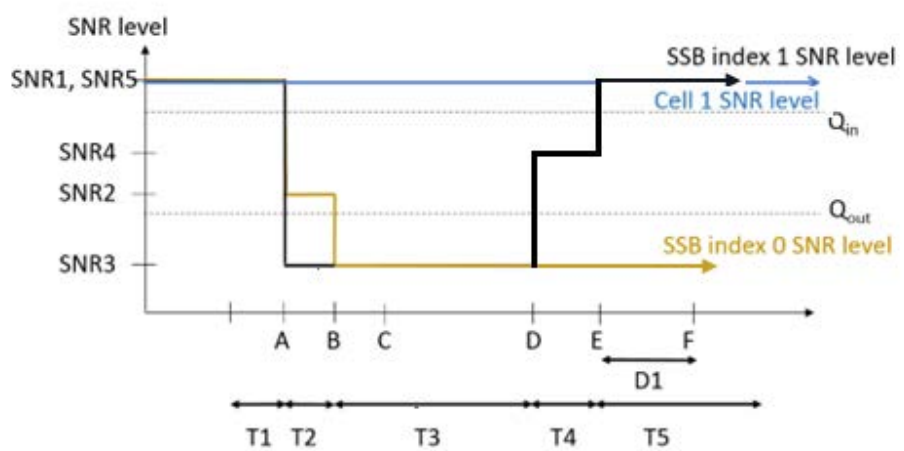


Figure A.5.5.1.2.1-1: SNR variation for in-sync testing

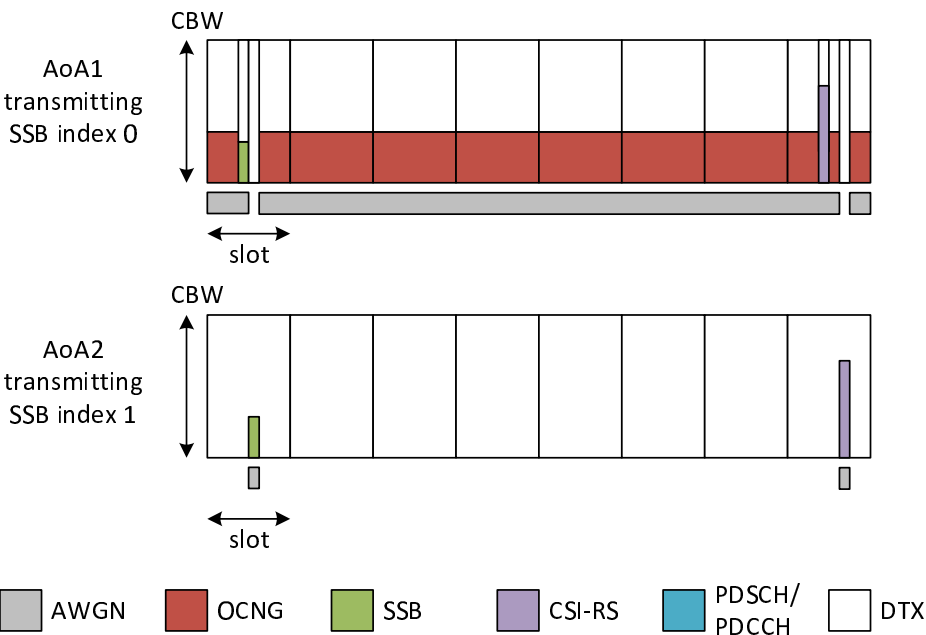


Figure A.5.5.1.2.1-2: Time multiplexed downlink transmissions**A.5.5.1.2.2 Test Requirements**

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.3 Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with SSB-based RLM RS in DRX mode**A.5.5.1.3.1 Test Purpose and Environment**

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.5.5.1.3.1-1. The test parameters are given in Tables A.5.5.1.3.1-2, and A.5.5.1.3.1-3. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-2. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.5.5.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.5.5.1.3.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	FDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.3.1-2: General test parameters for FR2 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 2		TDD
BW _{channel}	Config 1, 2		100: N _{RB,c} = 66
Data RBs allocated	Config 1, 2		66
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1

UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
TDD Configuration	Config 1, 2		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1, 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.3.4 TDD
SSB Configuration	Config 1, 2		SSB.1 FR2
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		120 KHz
PRACH Configuration	Config 1, 2		Table A.3.8.3.1
SSB index assigned as RLM RS	Config 1, 2		0,1
OCNG parameters			OP.1
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
REG bundle size			6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1, 2		TRS.2.1 TDD
T1		s	0.2
T2		s	14.48
T3		s	14.48
D1		s	14.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			
Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.5.5.1.3.1-3: OTA related cell specific test parameters for FR2 (Cell 2) for out-of-sync radio link monitoring tests in DRX mode

Parameter	Unit	Test 1		
		T1	T2	T3
AoA setup		Setup 1 defined in A.3.15		
Assumption for UE beams ^{Note 5}		Rough		
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		
EPRE ratio of PBCH DMRS to SSS	dB			
EPRE ratio of PBCH to PBCH DMRS	dB			

EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
ssb-Index 0 SNR	Config 1, 2	dB	2 ^{Note 6}	-6 ^{Note 6}	-15
ssb-Index 1 SNR	Config 1, 2		2 ^{Note 6}	-15	-15
N_{oc}	Config 1, 2	dBm/15K Hz	-104.7dBm		
Propagation condition			TDL-A 30ns 75Hz		
Note 1:	OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.				
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.				
Note 4:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.				
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				
Note 6:	This value allows up to 1dB degradation from applied SNR to UE baseband				

Table A.5.5.1.3.1-4: Void

Table A.5.5.1.3.1-5: Void

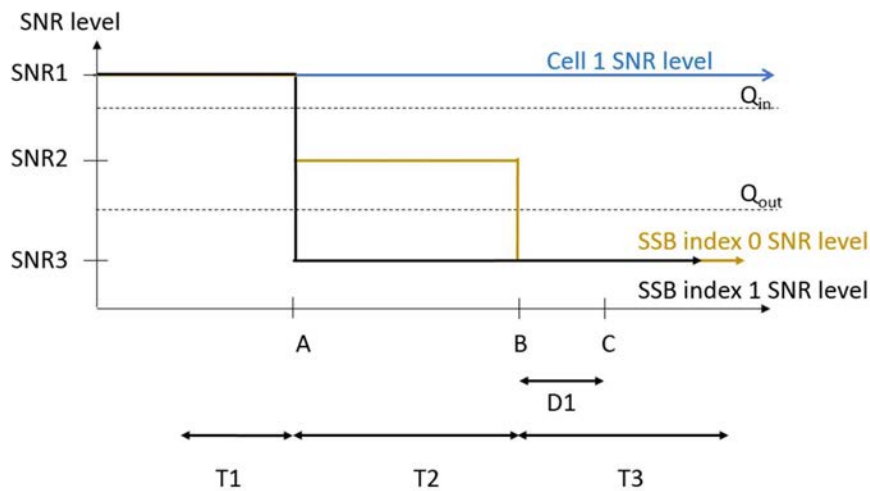


Figure A.5.5.1.3.1-1: SNR variation for out-of-sync testing

A.5.5.1.3.2 Test Requirements

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.4 Radio Link Monitoring In-sync Test for FR2 PSCell configured with SSB-based RLM RS in DRX mode

A.5.5.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.5.5.1.4.1-1. The test parameters are given in Tables A.5.5.1.4.1-2, and A.5.5.1.4.1-3. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-2. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.1.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.5.5.1.4.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	FDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.4.1-2: General test parameters for FR2 in-sync testing in DRX mode

Parameter		Unit	Value Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 2		TDD
BW _{channel}	Config 1, 2		100: N _{RB,c} = 66
Data RBs allocated	Config 1, 2		66
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
TDD Configuration	Config 1, 2		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1, 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.3.1 TDD
SSB Configuration	Config 1, 2		SSB.1 FR2
SMTC Configuration	Config 1, 2		SMTC.3

PDSCH/PDCCH subcarrier spacing	Config 1, 2		120 KHz
PRACH Configuration	Config 1, 2		Table A.3.8.3.1
SSB index assigned as RLM RS	Config 1, 2		0,1
OCNG parameters			OP.1
CP length			Normal
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.11
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1, 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1, 2		TRS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	2.8
T4		s	0.2
T5		s	3.88
D1		s	3.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			
Note 3: E-UTRAN is in non-DRX mode under test.			

Table A.5.5.1.4.1-3: OTA related cell specific test parameters for FR2 (Cell 2) for in-sync radio link monitoring test in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.15				

Assumption for UE beams ^{Note 5}			Rough					
EPRE ratio of PDCCH DMRS to SSS		dB	0					
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB	0					
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
ssb-Index 0 SNR	Config 1, 2	dB	² Note 6	- ⁶ Note 6	-15	-4.5	² Note 6	
ssb-Index 1 SNR	Config 1, 2		² Note 6	-15	-15	-15	-15	
N_{oc}	Config 1, 2	dBm/1 5KHz	-104.7dBm					
Propagation condition			TDL-A 30ns 75Hz					
Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.3								
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.								
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.								
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation								
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband								

Table A.5.5.1.4.1-4: Void

Table A.5.5.1.4.1-5: Void

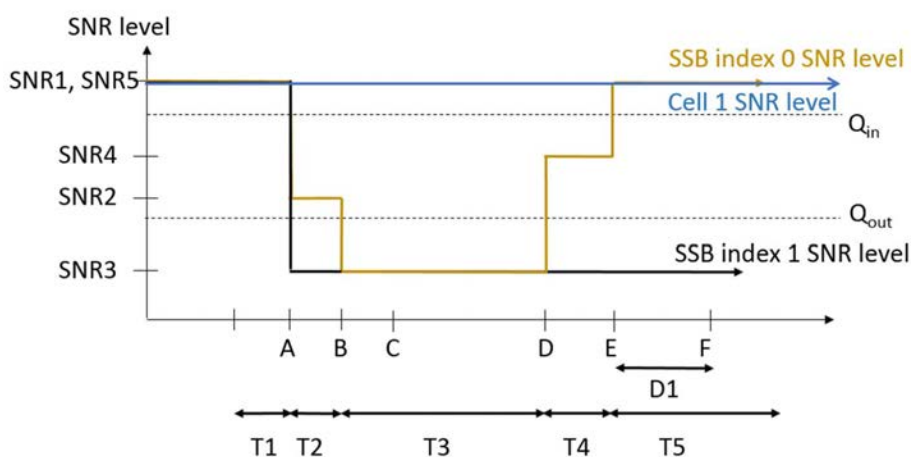


Figure A.5.5.1.4.1-1: SNR variation for in-sync testing.

A.5.5.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.5 EN-DC Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with CSI-RS-based RLM in non-DRX mode

A.5.5.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR2 TDD PSCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.5.5.1.5.1-1, A.5.5.1.5.1-2, A.5.5.1.5.1-3 and A.5.5.1.5.1-3A below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.5.5.1.5.1-1 shows the variation of the downlink SNR in the E-UTRAN PCell and the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms). In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.5.5.1.5.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.5.1-2: General test parameters for FR2 PSCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex Mode			TDD
BW _{channel}	Config 1, 2		100: N _{RB,c} = 66
Data RBs allocated	Config 1, 2		24
BW _{occupied}	Config 1, 2		24
TDD Configuration	Config 1		TDDConf.3.1
	Config 2		TDDConf.3.1
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.4

UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.4
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
	Config 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD CCR.3.6 TDD
	Config 2		CCR.3.4 TDD CCR.3.6 TDD
SSB Configuration	Config 1		SSB.1 FR2
	Config 2		SSB.1 FR2
SMTTC Configuration	Config 1		SMTTC.1
	Config 2		SMTTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
	Config 2		120 KHz
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
	Config 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.35
T3		s	0.35

D1	s	0.31
Note 1: UE-specific PDCCH is not transmitted after T1 starts.		
Note 2: E-UTRAN is in non-DRX mode under test.		

Table A.5.5.1.5.1-3: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1					
			T1	T2	T3	T1	T2	T3
AoA setup			Setup 3 defined in A.3.15					
			AoA1			AoA2		
Assumption for UE beams ^{Note 10}			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	0			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR on RLM-RS1	Config 1, 2	dB	2 ^{Note 11}	-6 ^{Note 11}	-15			
SNR on RLM-RS2	Config 1, 2	dB	Not sent			2 ^{Note 11}	-15	-15
N_{oc}	Config 1, 2	dBm/15kHz	-92.1			-92.1		
Propagation condition			TDL-A 30ns 75Hz			TDL-A 30ns 75Hz		
Note 1: OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.								
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.								
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.								
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.								
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.								
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.								
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.1.5.1-1.								
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.								
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation								
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband								

Table A.5.5.1.5.1-3A: Measurement gap configuration for FR2 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. (Ensure that RLM RS is partially overlapped with measurement gap)	

Table A.5.5.1.5.1-4: Void

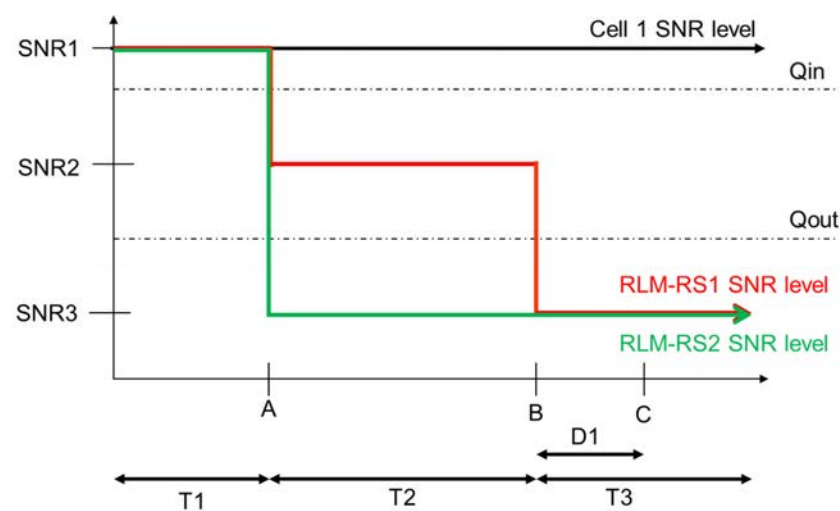


Figure A.5.5.1.5.1-1: SNR variation for CSI-RS out-of-sync testing

A.5.5.1.5.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 (PSCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

The UE shall stop transmitting uplink signal in Cell 2 (PSCell) no later than time point C (D₁ after the start of the time duration T3) on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.6 EN-DC Radio Link Monitoring In-sync Test for FR2 PSCell configured with CSI-RS-based RLM in non-DRX mode

A.5.5.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when no DRX is used. This test will partly verify the FR2 TDD PSCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.5.5.1.6.1-1, A.5.5.1.6.1-2, and A.5.5.1.6.1-3 below. There are two cells, cell 1 which is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.1.6.1-1 shows the variation of the downlink SNR in the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.5.5.1.6.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.6.1-2: General test parameters for FR2 PSCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex Mode			TDD
BW _{channel}	Config 1, 2		100: N _{RB,c} = 66
Data RBs allocated	Config 1, 2		24
BW _{occupied}	Config 1, 2		24
TDD Configuration	Config 1		TDDConf.3.1
	Config 2		TDDConf.3.1
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.4
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.4
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
	Config 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD CCR.3.3 TDD
	Config 2		CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration	Config 1		SSB.1 FR2
	Config 2		SSB.1 FR2
SMTTC Configuration	Config 1		SMTTC.1
	Config 2		SMTTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
	Config 2		120 KHz
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
OCNG parameters			OP.5
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2

TCI configuration for PDCCH#2			TCI.State.3
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
	Config 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			
Note 2: E-UTRAN is in non-DRX mode under test.			

Table A.5.5.1.6.1-3: Cell specific test parameters for FR2 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1
-----------	------	--------

			T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
AoA setup			Setup 3 defined in A.3.15									
Assumption for UE beams ^{Note 10}			AoA1 Rough					AoA2 Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0					Not sent				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0									
EPRE ratio of PBCH DMRS to SSS		dB										
EPRE ratio of PBCH to PBCH DMRS		dB										
EPRE ratio of PSS to SSS		dB										
EPRE ratio of PDSCH DMRS to SSS		dB										
EPRE ratio of PDSCH to PDSCH DMRS		dB										
EPRE ratio of OCNG DMRS to SSS		dB										
EPRE ratio of OCNG to OCNG DMRS		dB										
SNR on RLM-RS1	Config 1, 2	dB	2 ^{Note 11}	-6 ^{Note 11}	-15	-15	-15					
SNR on RLM-RS2	Config 1, 2	dB	Not sent					2 ^{Note 11}	-15	-15	-4.5	2 ^{Note 6}
N_{oc}	Config 1, 2	dBm/15KHz	-92.1					-92.1				
Propagation condition			TDL-A 30ns 75Hz					TDL-A 30ns 75Hz				
Note 1:	OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.											
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.											
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.											
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.											
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.											
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.											
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS RES.											
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.5.5.1.6.1-1.											
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.											
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.											
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband											

Table A.5.5.1.6.1-3A: Void

Table A.5.5.1.6.1-4: Void

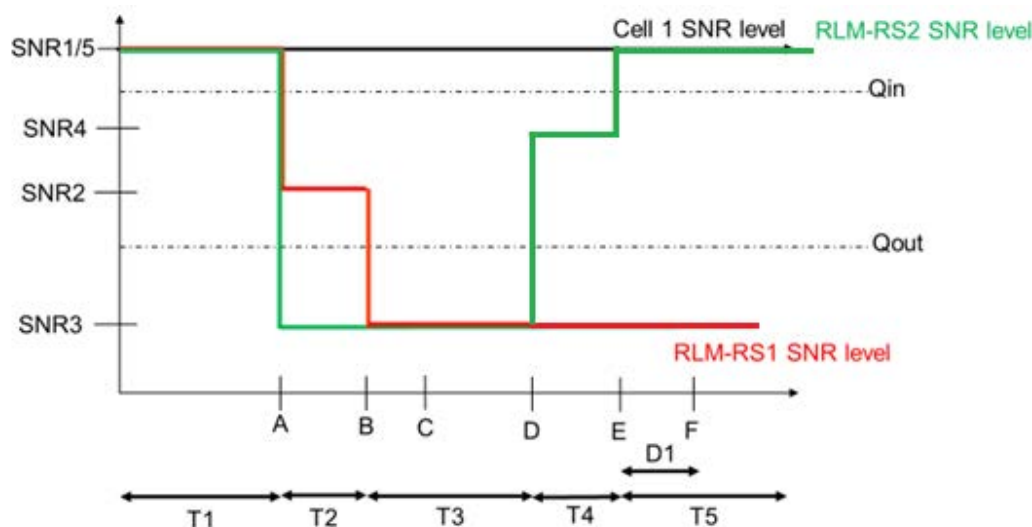


Figure A.5.5.1.6.1-1: SNR variation for CSI-RS in-sync testing

A.5.5.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.7 EN-DC Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with CSI-RS-based RLM in DRX mode

A.5.5.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when DRX is used. This test will partly verify the FR2 TDD PSCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.5.5.1.7.1-1, A.5.5.1.7.1-2, and A.5.5.1.7.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.5.5.1.7.1-1 shows the variation of the downlink SNR in the E-UTRAN PCell and the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 and SSB1 are configured as BFD-RS and are not same as RLM-RS to avoid triggering the beam failure during the RLM test.

Table A.5.5.1.7.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
---------------	-------------

1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.7.1-2: General test parameters for FR2 PSCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex Mode			TDD
TDD Configuration	Config 1		TDDConf.3.1
	Config 2		TDDConf.3.1
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR. 3.1 TDD
	Config 2		CR. 3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR. 3.4 TDD CCR.3.6 TDD
	Config 2		CCR. 3.4 TDD CCR.3.6 TDD
SSB Configuration	Config 1		SSB.1 FR2
	Config 2		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
	Config 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
	Config 2		120 KHz
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
SSB index for BFD-RS	Config 1, 2		0, 1
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8

	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
	Config 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			
Note 2: E-UTRAN is in non-DRX mode under test.			

Table A.5.5.1.7.1-3: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
AoA setup			Setup 1 defined in A.3.15		
Assumption for UE beams ^{Note 10}			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB			
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS1	Config 1, 2	dB	² Note 11	⁻⁶ Note 11	-15

SNR on RLM-RS2	Config 1, 2	dB	2 ^{Note 11}	-15	-15
N_{oc}	Config 1	dBm/15KHz	-104.7		
	Config 2		-104.7		
Propagation condition			TDL-A 30ns 75Hz		
Note 1:	OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.				
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.				
Note 4:	Void				
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.				
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.				
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.				
Note 8:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.1.7.1-1.				
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.				
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.				
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband.				

Table A.5.5.1.7.1-3A: Void

Table A.5.5.1.7.1-4: Void

Table A.5.5.1.7.1-5: Void

Table A.5.5.1.7.1-6: Void

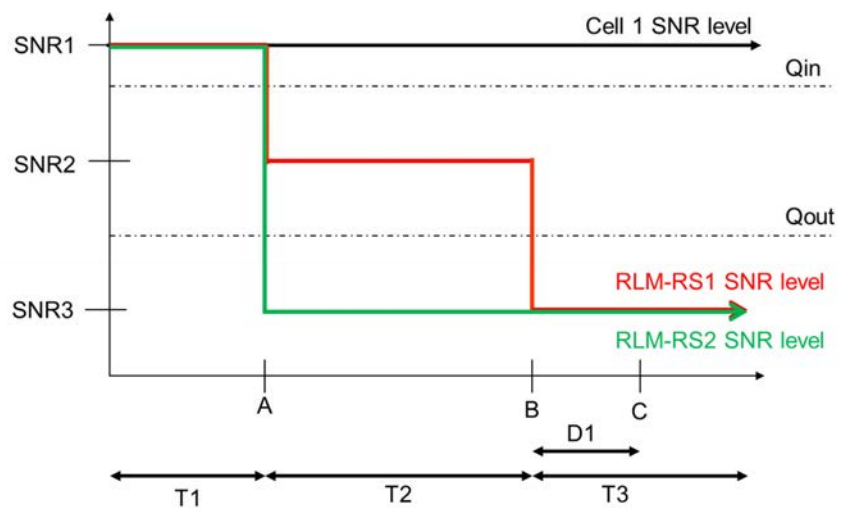


Figure A.5.5.1.7.1-1: SNR variation for CSI-RS out-of-sync testing

A.5.5.1.7.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 (PSCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

The UE shall stop transmitting uplink signal in Cell 2 (PSCell) no later than time point C (D_1 after the start of the time duration T3) on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.8 EN-DC Radio Link Monitoring In-sync Test for FR2 PSCell configured with CSI-RS-based RLM in DRX mode

A.5.5.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PSCell when DRX is used. This test will partly verify the FR2 TDD PSCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.5.5.1.8.1-1, A.5.5.1.8.1-2, A.5.5.1.8.1-3 and A.5.5.1.8.1-3A below. There are two cells, cell 1 which is the E-UTRAN PCell, and cell 2 is the NR PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.1.8.1-1 shows the variation of the downlink SNR in the PSCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms). In the test, SSB0 and SSB1 are configured as BFD-RS and are not same as RLM-RS to avoid triggering the beam failure during the RLM test.

Table A.5.5.1.8.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.8.1-2: General test parameters for FR2 PSCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex Mode			TDD
TDD Configuration	Config 1		TDDConf.3.1
	Config 2		TDDConf.3.1
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated	Config 1, 2		DLBWP.1.1

BWP configuration			
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
	Config 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD CCR.3.3 TDD
	Config 2		CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration	Config 1		SSB.1 FR2
	Config 2		SSB.1 FR2
SMTTC Configuration	Config 1		SMTTC.1
	Config 2		SMTTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
	Config 2		120 KHz
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
SSB index for BFD-RS	Config 1, 2		0, 1
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4

	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			<i>gp0</i>
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
	Config 2		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	1.64
T4		s	0.2
T5		s	1.88
D1		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			
Note 2: E-UTRAN is in non-DRX mode under test.			

Table A.5.5.1.8.1-3: Cell specific test parameters for FR2 for CSI-RS in-sync radio link monitoring in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB	0				
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					

EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS1	Config 1, 2	dB	2 ^{Note 11}	-6 ^{Note 11}	-15	-4.5	2 ^{Note 11}
SNR on RLM-RS2	Config 1, 2	dB	2 ^{Note 11}	-15	-15	-15	-15
N_{oc}	Config 1, 2	dBm/15KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				
Note 1:	OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.5.5.1.8.1-1.						
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.						
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.						
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband						

Table A.5.5.1.8.1-3A: Measurement gap configuration for FR2 CSI-RS in-sync radio link monitoring in DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned. (Ensure that RLM RS is partially overlapped with measurement gap)	

Table A.5.5.1.8.1-4: Void

Table A.5.5.1.8.1-5: Void

Table A.5.5.1.8.1-6: Void

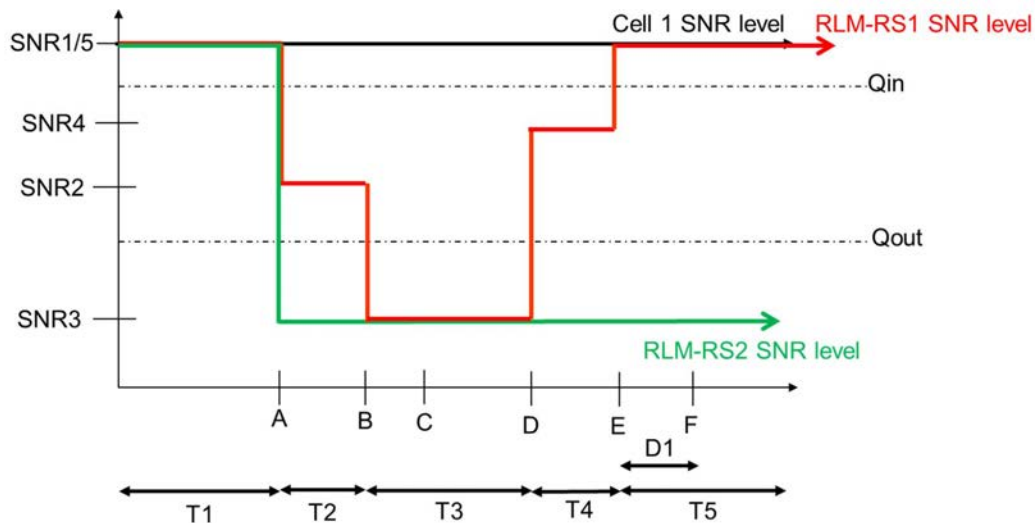


Figure A.5.5.1.8.1-1: SNR variation for CSI-RS in-sync testing

A.5.5.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PSCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.1.9 EN-DC Radio Link Monitoring UE Scheduling Restrictions on FR2

A.5.5.1.9.1 Test Purpose and Environment

The purpose is to verify that the NR UE correctly follows the RLM scheduling restrictions requirements defined in clause 8.1.7. This test verifies that the UE correctly receive the PDCCH scheduled on the symbols right before the RLM SSB symbols without overlap so that it sends ACK/NACK correctly. The test case is only applicable to UE which supports pdcch-MonitoringAnyOccasions or pdcch-MonitoringAnyOccasionsWithSpanGap.

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and NR FR2 PSCell (Cell 2). The test parameters for NR PSCell are given in table A.5.5.1.9.1-1, table A.5.5.1.9.1-2 and table A.5.5.1.9.1-3 below and the parameters and applicability for the E-UTRAN cell are defined in A.3.7.2. The UE is required during time period T1 to transmit ACK/NACK correctly upon scheduling of PDSCH.

Table A.5.5.1.9.1-1: Supported test configurations

Configuration	Description
---------------	-------------

1	FDD LTE, 120 kHz SSB SCS, 120 kHz RMC SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE, 120 kHz SSB SCS, 120 kHz RMC SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.5.5.1.9.1-2: General test parameters for RLM scheduling restriction test case in FR2

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		1, 2	1 and 2	1 for NR PSCell and 2 for LTE PCell
SSB configuration		1, 2	SSB.1 FR2	
SMTC configuration		1, 2	SMTC.3	
DRX cycle length	s	1, 2	OFF	
T1	s	1, 2	5	During T1 the UE is required to correctly transmit ACK/NACK

Table A.5.5.1.9.1-3: Cell specific test parameters for RLM scheduling restriction test case in FR2

Parameter	Unit	Test configuration	Cell 2	
AoA setup		1, 2	Setup 3 defined in A.3.15.3	
			AoA1	AoA2
Assumption for UE beams ^{Note 1}			Rough	Rough
TDD configuration		1, 2	TDDConf.3.1	
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66	
Data RBs allocated		1, 2	24	
PDSCH Reference measurement channel		1, 2	SR.3.2 TDD	Not sent
RMSI CORESET RMC configuration		1, 2	CR.3.1 TDD	Not sent
Dedicated CORESET RMC configuration		1, 2	CCR.3.2 TDD	Not sent
TRS configuration		1, 2	TRS.2.1 TDD	TRS.2.2 TDD
PDCCH/PDSCH TCI state		1, 2	TCI.State.2	Not sent
OCNG Pattern		1, 2	OP.5 defined in A.3.2.1	Not sent
Initial DL BWP configuration		1, 2	DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1	
RLM-RS		1, 2	SSB with index 0	SSB with index 1
N_{oc}	dBm/15kHz	1, 2	-92.1	-92.1
N_{oc} ^{Note2}	dBm/SCS	1, 2	-84.9	Not sent
$\hat{E}_s/N_{oc}$	dB	1, 2	3	N/A
$\hat{E}_s/I_{ot_BB}$ ^{Note 4}	dB	1, 2	1	1
SSB_RP ^{Note3}	dBm/SCS	1, 2	-81.1	-81.1

Io	dBm/95.04 MHz	1, 2	-54.35	-54.35
Time multiplexing of the downlink transmissions from each AoA		1, 2	Defined in Figure A.5.5.1.9.1-1	
Propagation Condition		1, 2	AWGN	AWGN
Note 1: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.				

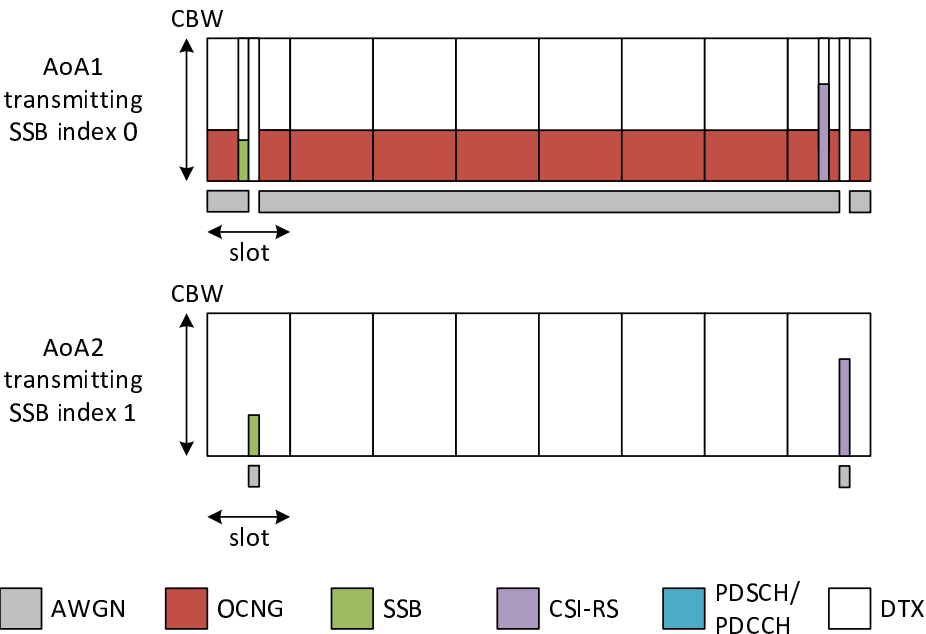


Figure A.5.5.1.9.1-1: Time multiplexed downlink transmissions

A.5.5.1.9.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.1.7.3.

The UE shall be continuously scheduled by PDCCH on the symbols right before each SSB which is not covered by SMTC during the entire length of T1. The UE shall transmit ACK/NACK for every scheduled PDCCH during the time duration T1.

A.5.5.1.10 Radio Link Monitoring Out-of-sync Test for FR2 PSCell configured with SSB-based RLM RS for UE fulfilling relaxed measurement criterion

A.5.5.1.10.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.2.4 for UE fulfilling good serving cell quality criterion.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.5.5.1.10.1-1. The test parameters are given in Tables A.5.5.1.10.1-2, and A.5.5.1.10.1-3. There are two cells, Cell 1 is the E-UTRAN PCell, and Cell 2 is the PSCell, in the test. The E-UTRAN PCell setting refers to Table A.3.7.2.1-2. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.5.5.1.10.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.5.5.1.10.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	FDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, NR 120 KHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.1.10.1-2: General test parameters for FR2 out-of-sync testing for UE fulfilling relaxed measurement criterion

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
Duplex mode	Config 1, 2		TDD
BW _{channel}	Config 1, 2		100: N _{RB,C} = 66
Data RBs allocated	Config 1, 2		66
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
TDD Configuration	Config 1, 2		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1, 2		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.3.4 TDD
SSB Configuration	Config 1, 2		SSB.1 FR2
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		120 KHz

PRACH Configuration		Config 1, 2		Table A.3.8.3.4
SSB index assigned as RLM RS		Config 1, 2		0
OCNG parameters				OP.1
CP length				Normal
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
	REG bundle size			6
DRX Configuration				DRX.3
Gap pattern ID				N.A.
Layer 3 filtering				<i>Enabled</i>
T310 timer			ms	0
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1, 2		CSI-RS.3.1 TDD
reportConfigType				periodic
reportQuantity				cri-RI-PMI-CQI
CSI reporting periodicity			slot	40
CSI reporting offset			slot	4
TCI states for PDCCH/PDSCH				TCI.State.2
CSI-RS for tracking		Config 1, 2		TRS.2.1 TDD
T1			s	0.2
T2			s	14.48
T3			s	28.88
D1			s	28.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				
Note 3: E-UTRAN is in non-DRX mode under test.				

Table A.5.5.1.10.1-3: OTA related cell specific test parameters for FR2 (Cell 2) for out-of-sync radio link monitoring tests for UE fulfilling relaxed measurement criterion

Parameter	Unit	Test 1		
		T1	T2	T3
AoA setup		Setup 1 defined in A.3.15		
Assumption for UE beams ^{Note 5}		Rough		
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		
EPRE ratio of PBCH DMRS to SSS	dB	0		
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PSS to SSS	dB			
EPRE ratio of PDSCH DMRS to SSS	dB			
EPRE ratio of PDSCH to PDSCH DMRS	dB			
EPRE ratio of OCNG DMRS to SSS	dB			
EPRE ratio of OCNG to OCNG DMRS	dB			

ssb-Index 0 SNR	Config 1, 2	dB	2 ^{Note 6}	2 ^{Note 6}	-15
N_{oc}	Config 1, 2	dBm/15K Hz	-104.7dBm		
goodServingCellEvaluationRLM			configured		
offset in goodServingCellEvaluationRLM		dB	Not configured		
Propagation condition			TDL-A 30ns 75Hz		
Note 1:	OCNG shall be used such that the resources in Cell 2 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.				
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.				
Note 4:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.				
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				
Note 6:	This value allows up to 1dB degradation from applied SNR to UE baseband				

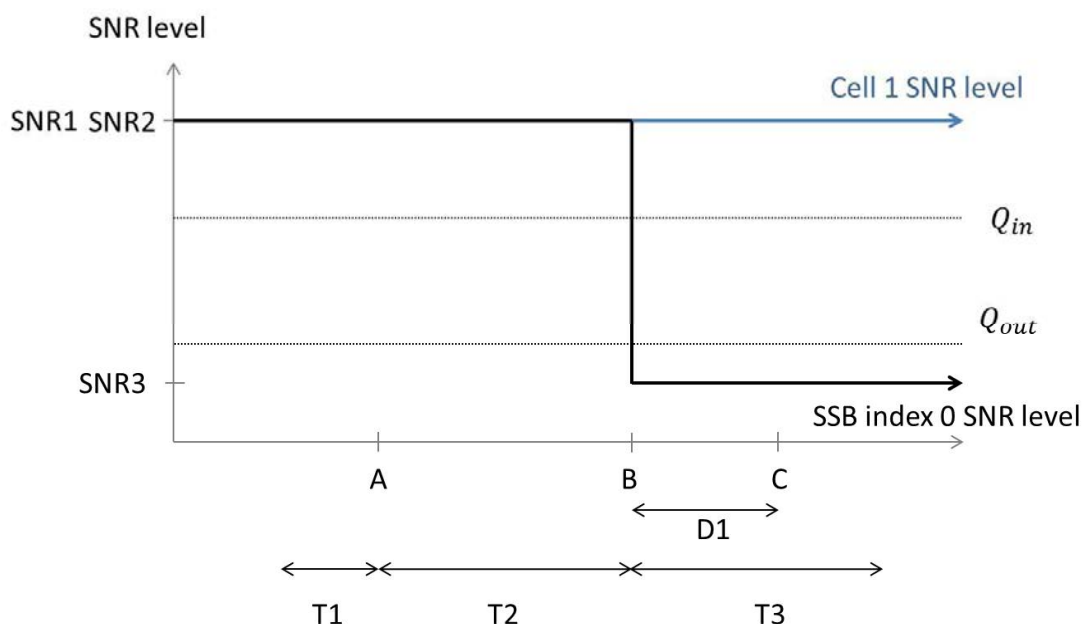


Figure A.5.5.1.10.1-1: SNR variation for out-of-sync testing

A.5.5.1.10.2 Test Requirements

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal in Cell 2 no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2 Interruption

A.5.5.2.1 E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

A.5.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that when E-UTRA PCell is in DRX and NR PSCell is in non-DRX, NR PSCell interruptions due to transitions from active to non-active and from non-active to active during LTE PCell DRX the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.1.1-1.

The general test parameters are given in Table A.5.5.2.1.1-2, and NR cell specific test parameters are given in Table A.5.5.2.1.1-3 and A.5.5.2.1.1-4. The E-UTRAN PCell DRX configuration parameters are given in Table A.5.5.2.1.1-5 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.2-1. In the test there are two cells: Cell1 and Cell2. Cell1 is LTE PCell on and Cell2 is NR FR2 PSCell. The test consists of one time period, with duration of T1. During T1, NR PSCell is continuously scheduled in DL while LTE PCell is not scheduled and has DRX configured. Prior to the start of the time duration T1, Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. Prior to start of T1 the DRX inactivity timer for the LTE PCell has already expired. During T1 the UE shall be continuously scheduled on NR PSCell while not scheduled on LTE PCell. PDCCH indicating a new transmission on PSCell shall be sent continuously during the entire time duration to ensure UE would not enter DRX state on PSCell.

Table A.5.5.2.1.1-1: Interruption at transitions between active and non-active during DRX supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.2.1.1-2: General test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other is NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
CP length		Normal	Applicable to cell1 and cell 2
DRX		DRX.4	DRX related parameters are defined in Table A.3.3.4-1
Measurement gap pattern Id		OFF	
T1	s	6.25	

Table A.5.5.2.1.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		TDDConf.3.1
BW _{channel}	Config 1,2	MHz	100: N _{RB,c} = 66
Data RBs allocated	Config 1,2		66

Downlink initial BWP Configuration		Config 1,2		DLBWP.0.1
Downlink dedicated BWP Configuration		Config 1,2		DLBWP.1.1
Uplink initial BWP configuration		Config 1,2		ULBWP.0.1
Uplink dedicated BWP configuration		Config 1,2		ULBWP.1.1
TRS configuration		Config 1,2		TRS.2.1 TDD
TCI state		Config 1,2		TCI.State.0
PDSCH Reference measurement channel		Config 1,2		SR.3.1 TDD
RMSI CORESET Reference Channel		Config 1,2		CR.3.1 TDD
RMC CORESET Reference Channel		Config 1,2		CCR.3.1 TDD
OCNG Patterns				OP.1
SSB Configuration				SSB.3 FR2
SMTC Configuration	Config 1,2			SMTC.1
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)		dB	17	
$\hat{E}_s/N_{oc}$				
Propagation Condition				AWGN
Time offset to cell1 ^{Note 2}			μs	3
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells				

Table A.5.5.2.1.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in synchronous EN-DC

Parameter	Unit	Cell2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1
Assumption for UE beams ^{Note 6}		Fine
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-112
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-102.97
$\hat{E}_s/N_{oc}$	dB	17
SSB RP ^{Note2}	dBm/SCS ^{Note4}	-85.97
$\hat{E}_s/I_{ot}$	dB	17
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-56.90

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS B _{RP} and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.5.5.2.1.1-5: Void**A.5.5.2.1.2 Test Requirements**

The UE shall be continuously scheduled in NR PSCell during the entire length of T1. UE shall not be scheduled in LTE PCell during T1. During the time duration T1 the UE shall transmit at least 99% of ACK/NACK on NR PSCell.

Interruption on NR PSCell shall not exceed 0.625ms (5 slots) as defined in clause 8. 2.1.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.2 E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC**A.5.5.2.2.1 Test Purpose and Environment**

The purpose of this test is to verify that when LTE PCell is in DRX and NR PSCell is in non-DRX, NR PSCell interruptions due to transitions from active to non-active and from non-active to active during LTE PCell DRX the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.2.1-1.

The general test parameters are given in Table A.5.5.2.2.1-2, and NR cell specific test parameters are given in Table A.5.5.2.2.1-3 and A.5.5.2.2.1-4. The E-UTRAN PCell DRX configuration parameters are given in Table A.5.5.2.2.1-5 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.2-1. In the test there are two cells: Cell1 and Cell2. Cell1 is LTE PCell and Cell2 is NR PSCell. The test consists of one time period, with duration of T1. During T1, NR PSCell is continuously scheduled in DL while LTE PCell is not scheduled and has DRX configured. Prior to the start of the time duration T1, Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. Prior to start of T1 the DRX inactivity timer for the LTE PCell has already expired. During T1 the UE shall be continuously scheduled on NR PSCell while not scheduled on LTE PCell. PDCCH indicating a new transmission on PSCell shall be sent continuously during the entire time duration to ensure UE would not enter DRX state on PSCell.

Table A.5.5.2.2.1-1: Interruption at transitions between active and non-active during DRX supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations

Table A.5.5.2.2.1-2: General test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other is NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
CP length		Normal	Applicable to cell1 and cell 2
DRX		DRX.6	DRX related parameters are defined in Table A.3.3.6-1
Measurement gap pattern Id		OFF	
T1	s	6.25	

Table A.5.5.2.2.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		TDDConf.3.1
BW _{channel}	Config 1,2	MHz	100: N _{RB,c} = 66
Data RBs allocated	Config 1,2		66
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1
TRS configuration	Config 1,2		TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.3 FR2
SMTC Configuration	Config 1,2		SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
$\bar{E}_s/N_{oc}$		dB	17
Propagation Condition			AWGN
Time offset to cell1 ^{Note 2}		μs	62.5

- Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells

Table A.5.5.2.2.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter	Unit	Cell2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1
Assumption for UE beams ^{Note 6}		Fine
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-112
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-102.97
$\hat{E}_s/N_{oc}$	dB	17
SS B _{RP} ^{Note2}	dBm/SCS ^{Note4}	-85.97
$\hat{E}_s/I_{ot}$	dB	17
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-56.90
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS B_{RP} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation		

Table A.5.5.2.2.1-5: Void

A.5.5.2.2.2 Test Requirements

The UE shall be continuously scheduled in NR PSCell during the entire length of T1. UE shall not be scheduled in LTE PCell during T1. During the time duration T1 the UE shall transmit at least 99% of ACK/NACK on NR PSCell.

Interruption on NR PSCell shall not exceed 0.625ms (5 slots) as defined in clause 8. 2.1.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.3 E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

A.5.5.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that for NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for

and NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.3.1-1.

The general test parameters are given in Table A.5.5.2.3.1-2, and NR cell specific test parameters are given in Table A.5.5.2.3.1-3 and A.5.5.2.3.1-4 below. The E-UTRAN cell specific test parameters can be found in Table A.3.7.2.1-2. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is LTE PCell, Cell2 and Cell 3 are NR FR2 PSCell and NR FR2 deactivated SCell, respectively. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* for the deactivated NR SCells is received by the UE, defines the start of time period T1. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.5.5.2.3.1-1: Interruption during measurements on deactivated NR SCC supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.2.3.1-2: General test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on NR RF channel number 3.
CP length		Normal	Applicable to cell1, cell 2 and cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (<i>measCycleSCell</i>)	Ms	640	
T1	S	10	

Table A.5.5.2.3.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Frequency Range			FR2	FR2
Duplex mode	Config 1,2		TDD	TDD
TDD configuration	Config 1,2		TDDConf.3.1	TDDConf.3.1
BW _{channel}	Config 1,2	MHz	100: N _{RB,c} = 66	100: N _{RB,c} = 66
Data RBs allocated	Config 1,2		66	66
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1	DLBWP.0.1
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1	DLBWP.1.1
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1	ULBWP.0.1
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1	ULBWP.1.1
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD	-

RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	CR.3.1 TDD
PDCCH CORESET parameters	Config 1,2		CCR 3.1 TDD	CCR 3.1 TDD
OCNG Patterns			OP.1	OP.1
SSB Configuration	Config 1,2		SSB.1 FR2	SSB.1 FR2
SMTTC Configuration	Config 1,2		SMTTC.1	SMTTC.1
TRS configuration	Config 1,2		TRS.2.1 TDD	TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0	TCI.State.0
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation Condition			AWGN	AWGN
Time offset to cell1 ^{Note 2}		μs	3	3+ Time offset to cell2
Time offset to cell2 ^{Note 3}		μs	-	3
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells Note 3: Receive time difference of signals received between slot timing boundary from two NR Cells including time alignment error between the two cells				

Table A.5.5.2.3.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in synchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Angle of arrival configuration			Setup 1 defined in clause A.3.15.1	
Assumption for UE beams ^{Note 6}			Fine	Rough
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/15kHz	-111.7	-104.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/SCS ^{Note3}	-102.7	-95.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
SSB_RP ^{Note2}	NR_TDD_FR2_A	dBm/SCS ^{Note4}	-90.7	-90.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
$\hat{E}_s/I_{ot}$	NR_TDD_FR2_A	dB	12	5
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			

	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
$\hat{E}_s/N_{oc}$	NR_TDD_FR2_A	dB	12	5
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
I_0^{Note2}	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-61.45	-60.52
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: SSB_RP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone				
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone				
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.5.2.3.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell.

If the NR PSCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PSCell immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.5.5.2.3.2-1.

If the NR PSCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PSCell no earlier than 4 slot before an SMTC and no later than 4 slot after the SMTC. the interruption on NR PSCell shall not exceed the value defined in Table A.5.5.2.3.2-2.

Table A.5.5.2.3.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	4

Table A.5.5.2.3.2-2: Interruption duration if the NR PSCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	8 + SMTC duration

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.4 E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

A.5.5.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that for NR PSCell interruptions during the measurement on the deactivated NR SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.4.1-1.

The general test parameters are given in Table A.5.5.2.4.1-2, and NR cell specific test parameters are given in Table A.5.5.2.4.1-3 and A.5.5.2.4.1-4 below. The E-UTRAN cell specific test parameters can be found in Table A.3.7.2.1-2. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is LTE PCell, Cell2 and Cell 3 are NR FR2 PSCell and NR FR2 deactivated SCell, respectively. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* for the deactivated NR SCells is received by the UE, defines the start of time period T1. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.5.5.2.4.1-1: Interruption during measurements on deactivated NR SCC supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.2.4.1-2: General test parameters for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on NR RF channel number 3.
CP length		Normal	Applicable to cell1, cell 2 and cell3
AoA number		1	Applicable to cell2 and cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (<i>measCycleSCell</i>)	ms	640	
T1	s	10	

Table A.5.5.2.4.1-3: NR cell specific test parameters for E-UTRAN – NR interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Frequency Range			FR2	FR2
Duplex mode	Config 1,2		TDD	TDD
TDD configuration	Config 1,2		TDDConf.3.1	TDDConf.3.1
BW _{channel}	Config 1,2	MHz	100: N _{RB,c} = 66	100: N _{RB,c} = 66
Data RBs allocated	Config 1,2		66	66

Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1	
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1	
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1	
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1	
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD	-
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	CR.3.1 TDD
PDCCH CORESET parameters	Config 1,2		CCR.3.1 TDD	CCR.3.1 TDD
OCNG Patterns			OP.1	OP.1
SSB Configuration			SSB.1 FR2	SSB.1 FR2
SMTTC Configuration	Config 1,2		SMTTC.1	SMTTC.1
TRS configuration	Config 1,2		TRS.2.1 TDD	TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0	TCI.State.0
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation Condition			AWGN	AWGN
Time offset to cell1 ^{Note 2}		µs	62.5	62.5+ Time offset to cell2
Time offset to cell2 ^{Note 3}		µs	-	3
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells Note 3: Receive time difference of signals received between slot timing boundary from two NR Cells including time alignment error between the two cells				

Table A.5.5.2.4.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated NR SCC in asynchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Angle of arrival configuration			Setup 1 defined in clause A.3.15.1	
Assumption for UE beams ^{Note 6}			Fine	Rough
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/15kHz	-111.7	-104.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/SCS ^{Note3}	-102.7	-95.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			

SSB_RP ^{Note2}	NR_TDD_FR2_A	dBm/SCS ^{Note4}	-90.7	-90.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
$\hat{E}_s / I_{ot}$		dB	12	5
$\hat{E}_s / N_{oc}$		dB	12	5
I _o ^{Note2}	NR_TDD_FR2_A	dBm/95.04 MHz ^{Note4}	-61.45	-60.52
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: SSB_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone				
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone				
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.5.2.4.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell.

If the NR PSCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PSCell immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.5.5.2.4.2-1.

If the NR PSCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PSCell no earlier than 4 slot before an SMTC and no later than 4 slot after the SMTC. the interruption on NR PSCell shall not exceed the value defined in Table A.5.5.2.4.2-2.

Table A.5.5.2.4.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	4

Table A.5.5.2.4.2-2: Interruption duration if the NR PSCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	8 + SMTC duration

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.5 E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

A.5.5.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that for NR PSCell interruptions during the measurement on the deactivated E-UTRAN SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.5.1-1.

The general test parameters are given in Table A.5.5.2.5.1-2, and NR cell specific test parameters are given in Table A.5.5.2.5.1-3 and A.5.5.2.5.1-4 below. The E-UTRAN cell specific test parameters can be found in Table A.3.7.2.1-2. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 and Cell3 are LTE PCell and LTE deactivated SCell, respectively, and Cell2 is NR FR2 PSCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated E-UTRA SCell is received by the UE, defines the start of time period T1. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.5.5.2.5.1-1: Interruption during measurements on deactivated E-UTRAN SCC supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.2.5.1-2: General test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is NR RF channel and two are E-UTRAN RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on E-UTRAN RF channel number 3.
CP length		Normal	Applicable to cell1, cell 2 and cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (<i>measCycleSCell</i>)	ms	640	
T1	s	10	

Table A.5.5.2.5.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		TDDConf.3.1
BW _{channel}	Config 1,2	MHz	100: N _{RB,C} = 66
Data RBs allocated	Config 1,2		66
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1

Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD
PDCCH CORESET parameters	Config 1,2		CCR.3.1 TDD
OCNG Patterns			OP.1
SMTc Configuration	Config 1,2		SMTc.1
SSB Configuration	Config 1,2		SSB.1 FR2
TRS configuration	Config 1,2		TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation Condition			AWGN
Time offset to cell1 ^{Note 2}	μs		3
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells			

Table A.5.5.2.5.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in synchronous EN-DC

Parameter	Unit	Cell2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1
Assumption for UE beams ^{Note 6}		Fine
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-112
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-102.97
$\hat{E}_s / N_{oc}$	dB	17
SSB R_P ^{Note2}	dBm/SCS ^{Note4}	-85.97
$\hat{E}_s / I_{ot}$	dB	17
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-56.90

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SSB _{RP} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.2.5.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.5.5.2.5.2-1.

Table A.5.5.2.5.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	5

Table A.5.5.2.5.2-2: Void

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.6 E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

A.5.5.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that for NR PSCell interruptions during the measurement on the deactivated E-UTRAN SCC, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for NR PSCell in EN-DC specified in clause 8. 2.1.2. Supported test configurations are shown in table A.5.5.2.6.1-1.

The general test parameters are given in Table A.5.5.2.6.1-2, and NR cell specific test parameters are given in Table A.5.5.2.6.1-3 and A.5.5.2.6.1-4 below. The E-UTRAN cell specific test parameters can be found in Table A.3.7.2.1-2. In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 and Cell3 are LTE PCell and LTE deactivated SCell, respectively, and Cell2 is NR FR2 PSCell. Cell1 shall be configured as LTE PCell and Cell2 shall be configured as NR PSCell. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated E-UTRA SCell is received by the UE, defines the start of time period T1. During T1, LTE PCell and NR PSCell are continuously scheduled in DL.

Table A.5.5.2.6.1-1: Interruption during measurements on deactivated E-UTRAN SCC supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Note: The UE is only required to be tested in one of the supported test configurations

Table A.5.5.2.6.1-2: General test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is NR RF channel and two are E-UTRAN RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured deactivated SCell		Cell3	Deactivated SCell on E-UTRAN RF channel number 3.
CP length		Normal	Applicable to cell1, cell 2 and cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.5.5.2.6.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E-UTRAN SCC in asynchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		TDDConf.3.1
BW _{channel}	Config 1,2	MHz	100: N _{RB,c} = 66
Data RBs allocated	Config 1,2		66
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD
PDCCH CORESET parameters	Config 1,2		CCR.3.1 TDD
OCNG Patterns			OP.1
SMTC Configuration	Config 1,2		SMTC.1
SSB Configuration	Config 1,2		SSB.1 FR2
TRS configuration	Config 1,2		TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0
EPRE ratio of PSS to SSS	dB		0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			

Propagation Condition		AWGN
Time offset to cell1 ^{Note 2}	μ s	62.5
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells		

Table A.5.5.2.6.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated E_UTRAN SCC in asynchronous EN-DC

Parameter	Unit	Cell2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1
Assumption for UE beams ^{Note 6}		Fine
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-112
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-102.97
$\hat{E}_s / N_{oc}$	dB	17
SSB_RP ^{Note2}	dBm/SCS ^{Note4}	-85.97
$\hat{E}_s / I_{ot}$	dB	17
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-56.90
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation		

A.5.5.2.6.2 Test Requirements

The UE shall be continuously scheduled in LTE PCell and NR PSCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on NR PSCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTTC. Each interruption on NR PSCell shall not exceed the value defined in Table A.5.5.2.6.2-1.

Table A.5.5.2.6.2-1: Interruption duration if the NR PSCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	5

Table A.5.5.2.6.2-2: Void

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.7 E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching

A.5.5.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that when a UE needs to transmit aperiodic SRS on a PUSCH-less carrier of SCell, the UE can perform carrier based switching to one PUSCH-less SCCs from a CC with PUSCH. The test will verify the interruption requirements on active serving cell in SCG in clause 8.2.1.2.13. Supported test configurations are shown in table A.5.5.2.7.1-1.

In the test there are three cells: cell1, cell2 and cell3. Cell1 is E-UTRAN PCell on the primary component carrier. Cell3 is E-UTRAN SCell on the TDD secondary component carrier which operates in downlink without PUCCH/PUSCH. Cell2 is NR FR2 PSCell. The UE is configured with the SRS switching between E-UTRAN PCell and E-UTRAN SCell. The general test parameters and NR cell specific test parameters are given in Table A.5.5.2.8.1-2, A.5.5.2.8.1-3. And the E-UTRAN cell specific test parameters (for cell1 and cell3) can refer to Table A.3.7.2.1-1. The test consists of two successive time periods, with duration of T1 and T2, respectively. During T1 LTE PCell and NR PSCell are continuously scheduled in DL. Immediately at the beginning of T2, the UE is triggered for SRS switching by DCI 2_3 scheduling. After T2, the UE is expected to transmit aperiodic SRS on a special slot in the configured TDD UL/DL configuration, as scheduled by DCI 2_3.

Table A.5.5.2.7.1-1: E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching supported test configurations

Config	Description
1	LTE FDD(cell1), LTE TDD (cell3), NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD(cell1), LTE TDD (cell3), NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.2.7.1-2: General test parameters for E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	One is NR RF channel and the other two are E-UTRAN RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Active PSCell		Cell2	PSCell on NR RF channel number 2.
Activated SCell		Cell3	SCell on E-UTRAN RF channel number 3.
CP length		Normal	Applicable to Cell1, Cell2 and Cell3
DRX		OFF	
Measurement gap pattern Id		OFF	
T1	s	0.2	
T2	s	0.2	UE shall perform SRS switching during T2

Table A.5.5.2.7.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode	Config 1,2	TDD
TDD configuration	Config 1,2	TDDConf.3.1
BW _{channel}	Config 1,2	MHz 100: N _{RB,C} = 66
Downlink initial BWP Configuration	Config 1,2	DLBWP.0.1
Downlink dedicated BWP Configuration	Config 1,2	DLBWP.1.1

Uplink initial BWP configuration	Config 1,2		ULBWP.0.1
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1
TRS configuration	Config 1,2		TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration	Config 1,2		SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
$\hat{E}_s/N_{oc}$		dB	17
Propagation Condition			AWGN
Time offset to cell1 ^{Note 2}		ms	3
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells			

Table A.5.5.2.7.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter	Unit	Cell2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1
Assumption for UE beams ^{Note 6}		Fine
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-112
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-102.97
$\hat{E}_s/N_{oc}$	dB	17
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-85.97
$\hat{E}_s/I_{ot}$	dB	17
I_{ot} ^{Note2}	dBm/95.04 MHz ^{Note4}	-56.90

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.5.5.2.7.1-5: Sounding Reference Symbol Configuration for E-UTRAN – NR FR2 interruptions at E-UTRA SRS carrier based switching

Field	Value	Comment
srsBandwidthConfiguration	bw5	
srsSubframeConfiguration	Sc8	Once every 5 subframes
ackNackSrsSimultaneousTransmission	FALSE	
srsMaxUpPTS	N/A	Not applicable
srsBandwidth	0	No hopping
srsHoppingBandwidth	hbw0	
frequencyDomainPosition	0	
Duration	TRUE	Indefinite duration
Srs-ConfigIndexAp	17	SRS periodicity of 10ms. See Table 8.2-5 in TS 36.213 for aperiodic SRS transmission.
transmissionComb	0	
cyclicShift	cs0	No cyclic shift
SRS-AntennaPort	an1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 36.331.		

A.5.5.2.7.2 Test Requirements

The UE shall be continuously scheduled in NR FR2 PSCell throughout the test. During T2 two interruption time periods are allowed on Cell2 and Cell1, each interruption due to SRS carrier based switching on Cell2 shall not exceed X defined in Table A.5.5.2.7.2-1.

Table A.5.5.2.7.2-1: Interruption length X (slot) E-UTRAN – NR at E-UTRA SRS carrier based switching

μ	NR Slot length (ms)	Interruption length X (slots)
2	0.25	5
3	0.125	9

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.2.8 E-UTRAN – NR FR2 interruptions at NR SRS carrier based switching

A.5.5.2.8.1 Test Purpose and Environment

The purpose of the test is to verify interruptions at NR SRS carrier based switching requirements defined in TS38.133 clause 8.2.1.2.12 and TS36.133 clause 7.32.2.13. The general test parameters are given in Table

A.5.5.2.8.1-2, and NR cell specific test parameters are given in Table A.5.5.2.8.1-3. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.2-1.

In the test there are three cells: Cell1, Cell2 and Cell3. Cell1 is LTE PCell, Cell2 is NR FR2 PSCell and Cell3 is NR FR2 SCell. Cell3 is not configured with PUCCH/PUSCH transmission. The test consists of two time periods, with duration of T1 and T2, respectively. During T1 and T2, Cell1, Cell2 and Cell3 are continuously scheduled in DL. Prior to the start of the time duration T1, Cell1 shall be configured as LTE PCell, Cell2 shall be configured as NR PSCell and Cell3 shall be configured as NR SCell.

At the beginning of T2, the UE is triggered for SRS switching by DCI 2_3 scheduling. After T2, the UE is expected to transmit aperiodic SRS on a special slot in the configured TDD UL/DL configuration, as scheduled by DCI 2_3. TE shall trigger aperiodic SRS transmission on Cell3.

Table A.5.5.2.8.1-1: Interruption at transitions between active and non-active during DRX supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.2.8.1-2: General test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other is NR RF channel
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
Configured SCell		Cell3	SCell on NR RF channel number 3.
CP length		Normal	Applicable to cell1 and cell 2
DRX		OFF	
Measurement gap pattern Id		OFF	
T1	s	5	
T2	s	0.1	

Table A.5.5.2.8.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions at transitions between active and non-active during DRX in asynchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Frequency Range			FR2	
Duplex mode	Config 1,2		TDD	
TDD configuration	Config 1,2		TDDConf.3.1	
BW _{channel}	Config 1,2	MHz	100: N _{RB,C} = 66	
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1	
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1	
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1	
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1	
TRS configuration	Config 1,2		TRS.2.1 TDD	
SRS configuration	Config 1,2		SRS.6 TDD	
TCI state	Config 1,2		TCI.State.0	
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD	

RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTTC Configuration	Config 1,2		SMTTC.1
EPRE ratio of PSS to SSS	dB		0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
$\hat{E}_s/N_{oc}$	dB		17
Propagation Condition			AWGN
Time offset to cell1 ^{Note 2}	μ s		33
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells			

Table A.5.5.2.8.1-3A: OTA related test parameters

Parameter	Unit	Test 1	
		T1	T2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 6}		Fine	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-112	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-103	
$\hat{E}_s / N_{oc}$	dB	4	
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-99	
$\hat{E}_s / I_{ot}$	dB	4	
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-68.5	
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone			
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone			
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			

Table A.5.5.2.8.1-4: Void**A.5.5.2.8.3 Test Requirements**

In T2 UE shall transmit SRS on Cell3 as requested. During T2 interruption on Cell2 due to SRS carrier based switching from Cell2 to Cell3 shall not exceed the requirements defined in TS38.133 clause 8.2.1.2.12.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.3 SCell Activation and Deactivation Delay**A.5.5.3.1 SCell Activation and deactivation of SCell in FR2 intra-band****A.5.5.3.1.1 Test Purpose and Environment**

The purpose of this test case is the same as for the test defined in clause A.4.5.3.1.1 except the SCell is in FR2 intra-band.

The supported test configurations are shown in table A.5.5.3.1.1-1 below. The general and cell specific test parameters are the same except those described in the following clause. The listed parameter values in Tables A.5.5.3.1.1-2 and A.5.5.3.1.1-3 will replace the values of corresponding parameters in Tables A.4.5.3.1.1-2 and A.4.5.3.1.1-3. In this case, OTA related test parameters are shown in table A.5.5.3.1.1-4 below.

In this test it is assumed that the UE is receiving RRC messages pertaining to the SCell in SCG via signaling on SRB3.

Table A.5.5.3.1.1-1: Supported test configurations for FR2 SCell activation case with FR2 PSCell

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.5.3.1.1-2: General test parameters for FR2 SCell activation case with FR2 PSCell

Parameter	Unit	Value	Comment
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2

Table A.5.5.3.1.1-3: Cell specific test parameters for FR2 SCell activation case with FR2 PSCell

Parameter ^{Note 5}	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
SSB ARFCN		freq1			freq2		
Duplex mode		TDD			TDD		
TDD configuration		TDDConf.3.1			TDDConf.3.1		
BW _{channel}	MHz	100: N _{RB,c} = 66			100: N _{RB,c} = 66		
Data RBs allocated		66			66		
PDSCH Reference measurement channel		SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET Reference Channel		CR.3.1 TDD			CR.3.1 TDD		
RMC CORESET Reference Channel		CCR.3.1 TDD			CCR.3.1 TDD		
DL initial BWP configuration		DLBWP.0.1					
DL dedicated BWP configuration		DLBWP.1.1					
UL initial BWP configuration		ULBWP.0.1					
UL dedicated BWP configuration		ULBWP.1.1					

OCNG Patterns		OP.1	
SMTC configuration		SMTC.1	
SSB configuration		SSB.1 FR2	
TCI state		TCI.State.0	
TRS configuration		TRS.2.1 TDD	
CSI-RS configuration for CSI reporting		CSI-RS.3.1 TDD	
reportConfigType		periodic	N/A
reportQuantity		cri-RI-PMI-CQI	N/A
CSI reporting periodicity	slot	40	N/A
CSI reporting offset	slot	4	N/A
PDSCH/PDCCH subcarrier spacing	kHz	120	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation conditions		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Void			
Note 3: Void			
Note 4: Void			
Note 5: All parameters apply for configuration 1 and 2.			

Table A.5.5.3.1.1-4: OTA related test parameters for FR2 SCell activation case with FR2 PSCell

Parameter ^{Note 6}	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.3.15.1					
Assumption for UE beams ^{Note 7}		Rough			Rough		
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-104.7			-104.7		
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-95.7			-95.7		
$\hat{E}_s/N_{oc}$	dB	7			7		
SSB_RP ^{Note2}	dBm/SCS ^{Note4}	-88.7			-88.7		
$\hat{E}_s/I_{ot}$	dB	7			7		
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-58.92			-58.92		
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 2:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 3:	Void						
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone						
Note 5:	Void						
Note 6:	All parameters apply for configuration 1 and 2						
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.5.5.3.1.2 Test Requirements

The test requirements defined in clause A.4.5.3.1.2 shall apply to this test case, with the following exceptions:

- Placement of interruptions is only verified in NR PSCell.

A.5.5.3.2 SCell Activation and deactivation of known SCell in FR1 for 160ms SCell measurement cycle

A.5.5.3.2.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.4.5.3.1.1, except PSCell is in FR2.

The supported test configurations are shown in table A.5.5.3.2.1-1 below. The general test parameters are the same in Tables A.4.5.3.1.1-2. The cell specific test parameters are given in Tables A.5.5.3.2.1-2. In this case, OTA related test parameters are the same as in table A.5.5.3.2.1-3.

Table A.5.5.3.2.1-1: Supported test configurations for FR1 SCell activation case with PSCell is FR2

Configuration	Description
1	FDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	FDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	FDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	TDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	TDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	TDD LTE PCell, Cell 2 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Cell 3 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.5.3.2.1-2: Cell specific test parameters for FR1 SCell activation case with FR2 PSCell

Parameter		Unit	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
SSB ARFCN			freq2			freq1		
Duplex mode	Config 1,4		TDD			FDD		
	Config 2,3,5,6		TDD			TDD		
TDD configuration	Config 1,4		TDDConf.3.1			Not Applicable		
	Config 2,5					TDDConf.1.1		
	Config 3,6					TDDConf.2.1		
BW _{channel}	Config 1,4	MHz	100: N _{RB,c} = 66			10: N _{RB,c} = 52		
	Config 2,5					10: N _{RB,c} = 52		
	Config 3,6					40: N _{RB,c} = 106		
Data RBs allocated	Config 1,4		66			52		
	Config 2,5					52		
	Config 3,6					106		
DL initial BWP configuration	Config 1,2,3,4,5,6		DLBWP.0.1					
DL dedicated BWP configuration	Config 1,2,3,4,5,6		DLBWP.1.1					
UL initial BWP configuration	Config 1,2,3,4,5,6		ULBWP.0.1					
UL dedicated BWP configuration	Config 1,2,3,4,5,6		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					

PDSCH Reference measurement channel	Config 1,4		SR.3.1 TDD	SR.1.1 FDD
	Config 2,5			SR.1.1 TDD
	Config 3,6			SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.3.1 TDD	CR.1.1 FDD
	Config 2,5			CR.1.1 TDD
	Config 3,6			CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.3.1 TDD	CCR.1.1 FDD
	Config 2,5			CCR.1.1 TDD
	Config 3,6			CCR.2.1 TDD
OCNG Patterns			OP.1	
SMTC configuration			SMTC.1	
TCI state			TCI.State.0	NA
TRS configuration	Config 1,4		TRS.2.1 TDD	TRS.1.1 FDD
	Config 2,5			TRS.1.1 TDD
	Config 3,6			TRS.1.2 TDD
SSB configuration	Config 1,2,4,5		SSB.1 FR2	SSB.1 FR1
	Config 3,6			SSB.2 FR1
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.3.1 TDD	CSI-RS.1.1 FDD
	Config 2,5			CSI-RS.1.1 TDD
	Config 3,6			CSI-RS.2.1 TDD
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	120kHz	15kHz
	Config 3,6			30kHz
reportConfigType	Config 1-6		periodic	N/A
reportQuantity	Config 1-6		cri-RI-PMI-CQI	N/A
CSI reporting periodicity	Config 1,2,3,4,5,6	slot	40	N/A
CSI reporting offset	Config 1,2,3,4,5,6	slot	4	N/A
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition			AWGN	NA Link only, see clause A.3.7A
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Void				
Note 3: Void				
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.]				

Table A.5.5.3.2.1-3: OTA related test parameters for FR1 SCell activation case with FR2 PSCell

Parameter		Unit	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
Angle of arrival configuration			Setup 1 according to clause A.3.15.1			NA Link only, see clause A.3.7A		
Assumption for UE beams ^{Note 7}			Rough					
N_{oc} ^{Note1}		dBm/15kHz	-104.7					
N_{oc} ^{Note1}	Config 1,2,4,5	dBm/SCS	-95.7					
	Config 3,6							
SSB _{RP} ^{Note2}		Config 1,2,4,5	-88.7					
		Config 3.6						
		Note3						

$\hat{E}_s / N_{oc}$	Config 1,2,3,4,5,6	dB	7	
$\hat{E}_s / I_{ot}$		dB	7	
I_o^{Note2}	Config 1,2,4,5	dBm/ChBw ^N ote4,Note6	-58.92	
	Config 3,6			
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not setttable parameters themselves.			
Note 3:	Void			
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone			
Note 5:	Void			
Note 6:	ChBW is 94.04 MHz for Cell2, 9.36 MHz for Cell 3 in configurations 1,2,4,5, 38.1 MHz in configurations 3,6			
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			

A.5.5.3.2.2 Test Requirements

The test requirements defined in clause A.4.5.3.1.2 shall apply to this test case.

A.5.5.3.3 Void

A.5.5.3.4 Void

A.5.5.3.5 SCell Activation and deactivation of SCell in FR2

A.5.5.3.5.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements stated in clause 8.3, when the SCell is in FR2.

The supported test configurations are shown in table A.5.5.3.5.1-1 below. The test parameters are the same as in clause A.4.5.3.3.1 except those described in the following clause. The listed parameter values in Tables A.5.5.3.5.1-2 will replace the values of corresponding parameters in Tables A.4.5.3.3.1-2. The listed parameter values in Tables A.5.5.3.5.1-3 will replace the values of corresponding parameters in Tables A.4.5.3.3.1-3. In this case, OTA related test parameters are shown in table A.5.5.3.5.1-4 below.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, E-UTRA has one cell (Cell 1), NR has two cells, PSCell (Cell 2) in FR1 and SCell (Cell 3) in FR2. Cell 1 and Cell 2 have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRAN and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on NR. During T1 the SCell is powered off and UE is not aware of SCell.

A MAC message for activation of SCell is sent by the test equipment 100ms after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2.

During T2, the test equipment monitors the L1-RSRP measurement reporting for the SCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m+T_{L1-RSRP}$. In the next DL slot after slot $m+T_{L1-RSRP}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PSCell during activation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell1 deactivation command is sent until CSI reporting for SCell1 is discontinued.

Table A.5.5.3.5.1-1: FR2 SCell activation in non-DRX test configurations with FR1 PSCell

Configuration	Description
1	LTE FDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD PCell, Cell 2 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5	LTE TDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
6	LTE TDD PCell, Cell 2 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.3.5.1-2: General test parameters for FR2 SCell activation case with FR1 PSCell

Parameter	Unit	Value	Comment
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2
T2	s	2	During this time the UE shall activate the SCell.

Table A.5.5.3.5.1-3: Cell specific test parameters for FR2 SCell activation case with FR1 PSCell

Parameter		Unit	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2		
Duplex mode	Config 1,4		FDD			TDD		
	Config 2,3,5,6		TDD			TDD		
TDD configuration	Config 1,4		Not Applicable			TDDConf.3.1		
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52			100: N _{RB,c} = 66		
	Config 2,5		10: N _{RB,c} = 52					
	Config 3,6		40: N _{RB,c} = 106					
Data RBs allocated	Config 1,4		52			66		
	Config 2,5		52					
	Config 3,6		106					
BWP BW	Config 1,4		10: N _{RB,c} = 52			100: N _{RB,c} = 66		

		Config 2,5		10: $N_{RB,c} = 52$		
		Config 3,6		40: $N_{RB,c} = 106$		
DRx Cycle			ms	Not Applicable		
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD		SR.3.1 TDD	
	Config 2,5		SR.1.1 TDD			
	Config 3,6		SR.2.1 TDD			
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD		CR.3.1 TDD	
	Config 2,5		CR.1.1 TDD			
	Config 3,6		CR.2.1 TDD			
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD		CCR.3.1 TDD	
	Config 2,5		CCR.1.1 TDD			
	Config 3,6		CCR.2.1 TDD			
OCNG Patterns			OP.1			
SMTC configuration			SMTC.1			
TCI state			NA		TCI.State.0	
TRS configuration	Config 1,4		TRS.2.1 TDD		TRS.2.1 TDD	
	Config 2,5		TRS.1.1 TDD			
	Config 3,6		TRS.1.2 TDD			
SSB configuration	Config 1,2,4,5		SSB.1 FR1		SSB.1 FR2	
	Config 3,6		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz		120 kHz	
	Config 3,6		30 kHz			
CSI-RS configuration	Config 1~6		NA		NA	CSI-RS.3.1 TDD Note 5
reportConfigType	Config 1~6		periodic		NA	
reportQuantity	Config 1~6		cri-RI-PMI-CQI		NA	
CSI reporting periodicity Note 6	Config 1~6	slot	40		NA	
CSI reporting offset	Config 1~6	slot	4		NA	
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
Propagation condition		-	N/A Link only, see clause A.3.7A		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void						
Note 3: Void						
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.						
Note 5: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot $m+T_{L1-RSRP}$ during T2.						
Note 6: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.						

Table A.5.3.5.1-4: OTA related test parameters for FR2 SCell activation case with FR1 PSCell

Parameter	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		NA			Setup 1 according to clause A.3.15.1		
Assumption for UE beams Note 7		NA			Rough		

N_{oc} ^{Note1}		dBm/15kHz	Link only, see clause A.3.7A	-104.7		
N_{oc} ^{Note1}	Config 1,2,4,5	dBm/SCS		-95.7		
	Config 3,6					
SSB_RP ^{Note2}	Config 1,2,4,5	dBm/SCS ^{Note3}		-∞	-88.7	-88.7
	Config 3,6					
$\hat{E}_s/N_{oc}$	Config 1,2,3,4,5,6	dB		-∞	7	7
$\hat{E}_s/I_{ot}$		dB		-∞	7	7
I_o ^{Note2, Note 4}	Config 1,2,4,5	dBm/95.04 MHz		-66.68	-58.92	-58.92
	Config 3,6					
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 3: Void						
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone						
Note 5: Void						
Note 6: Void						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.						

A.5.5.3.5.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PSCell in the slot.

During T2 the UE shall start sending valid L1-RSRP report for the SCell in the configured slots for CSI reporting after slot (m+ $T_{L1-RSRP}$), where $T_{L1-RSRP}$ is no larger than

$$3\text{ms} + T_{\text{FirstSSB_MAX}} + 15 \cdot T_{\text{SMTC_MAX}} + 8 \cdot T_{\text{rs}} + T_{L1-RSRP, \text{measure}} + T_{L1-RSRP, \text{report}}$$

as defined in clause 8.3.2. For this test case, $T_{\text{FirstSSB_MAX}}=T_{\text{SMTC_MAX}}=T_{\text{rs}}=20\text{ms}$; $T_{L1-RSRP, \text{measure}}=480\text{ms}$ and $T_{L1-RSRP, \text{report}}=5\text{ms}$, which allows $T_{L1-RSRP}$ 1000ms.

During T2 the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{NR \text{ slot length}}$, where

- T_{HARQ} is defined in Table A.5.5.3.1.1-2

- $T_{\text{activation_time}} = 3\text{ms} + T_{\text{FirstSSB_MAX}} + 15 \cdot T_{\text{SMTC_MAX}} + 8 \cdot T_{\text{rs}} + T_{L1-RSRP, \text{measure}} + T_{L1-RSRP, \text{report}} + \max \{ (T_{\text{HARQ}} + T_{\text{uncertainty_MAC}} + 5\text{ms} + T_{\text{FineTiming}}), (T_{\text{uncertainty_RRC}} + T_{\text{RRC_delay}}) \}$, which allows 1030ms

- $T_{\text{CSI_Reporting}} = 10\text{ms}$

- NR slot length is 0.125ms for this test case.

During T3 the UE shall stop sending CSI reports for both SCells no later than slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{NR \text{ slot length}}$, as defined in clause 8.3.

During T2 interruption of PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{NR \text{ slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{NR \text{ slot length}}$, and interruption of E-UTRA PCell during SCell activation shall not happen outside the

subframe $m_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA slot length}}$ to subframe $m_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{EUTRA slot length}}$, as defined in clause 8.3, where $T_X = 20\text{ms}$, and m_1 and m_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot m .

During T3 the starting point of interruption of PSCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3 and the starting point of interruption of E-UTRA PCell during SCell deactivation shall not happen outside the subframe $n_1 + 1 + \frac{T_{\text{HARQ}}}{\text{EUTRA subframe length}}$ to subframe $n_2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{EUTRA subframe length}}$, where n_1 and n_2 are the index of the first and last subframe of E-UTRA PCell which overlaps with slot n .

The interruption of PSCell due to activation of SCell1 and SCell2 shall not be more than the values specified for EN-DC in Clause 8.2.1.2.10.

The interruption of PCell due to activation of SCell1 and SCell2 shall not be more than the values specified for EN-DC in Clause 7.32.2.5 of TS 36.133 [50].

A.5.5.3.6 Multiple SCell Activation and deactivation of one unknown SCell and one known SCell in FR2

A.5.5.3.6.1 Test Purpose and Environment

The purpose of this test is to verify that the multiple SCell activation and deactivation delay and interruption are within the requirements stated in clause 8.3, when the two SCells to be activated are in FR2 and one SCell is known and the other SCell is unknown by the UE at the time of activation.

The supported test configurations are shown in Table A.5.5.3.6.1-1 below. The general test parameters are given in Table A.5.5.3.6.1-2 and cell-specific test parameters in Table A.5.5.3.6.1-3 below. OTA related test parameters are shown in table A.5.5.3.6.1-4.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are four carriers, one E-UTRA cell, and three NR cells. Before the test starts the UE is connected to Cell 1 (PCell) on the E-UTRA carrier and Cell 2 (PSCell) on the NR carrier in FR1, but is not aware of Cell 3 (SCell1) or Cell 4 (SCell2) on the NR carriers both in FR2. Cell 1, Cell 2 and Cell 3 have constant signal levels throughout the test. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the Cell 3 (SCell1) and Cell 4 (SCell2) are configured on NR. The test equipment sends a single MAC message for activation of both SCells within 3s for UE power class 2/3/4 or 4s for UE power class 1 after RRM reports is sent for SCell1.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m , defines the start of time period T2. In the same MAC PDU, the test equipment activates the TCI state of RMC CORESET. In slot # m , the test equipment also sends an RRC message to configure the CSI-RS resources for SCell1 and SCell2.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted n , is received at the UE antenna connector.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for SCell is discontinued.

Table A.5.5.3.6.1-1: Supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations

Table A.5.5.3.6.1-2: General test parameters

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3,4	One E-UTRAN radio channel (1) and three NR radio channels (2,3,4) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2 in FR1.
Configured deactivated SCells		Cell 3, Cell 4	Configured deactivated secondary cell on NR RF channel number 3 and RF channel number 4, both in FR2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
SCell measurement cycle (measCycleSCell)	ms	160	For both Cell 3 and Cell 4
T1	s	7	During this time the PSCell shall be known and the SCells configured, SCell1 detected but SCell2 not detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	$k_1 \times \text{NR slot length}$	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by <i>dl-DataToUL-ACK</i> if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
k	slot	$k_1 + 3 \cdot N_{\text{subframe, slot}}^{\mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A. 5.5.3.6.1-3: Cell specific test parameters

Parameter		Unit	Cell 2			Cell 3			Cell 4		
			T1	T2	T3	T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2			freq3		
Duplex mode	Config 1,2		TDD								
TDD configuration	Config 1,2		TDDConf.3.1								
BW _{channel}	Config 1,2	MHz	100: N _{RB,C} = 66								
DL initial BWP configuration	Config 1,2		DLBWP.0.1								
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1								
UL initial BWP configuration	Config 1,2		ULBWP.0.1								
UL dedicated BWP configuration	Config 1,2		ULBWP.1.1								
Timing offset to Cell 2		ms	Not Applicable			0			0		

PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	CR.3.1 TDD		CR.3.1 TDD	
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD	CCR.3.1 TDD		CCR.3.1 TDD	
TRS configuration	Config 1,2		TRS.2.1 TDD	TRS.2.1 TDD		TRS.2.1 TDD	
CSI-RS configuration	Config 1,2		CSI-RS.3.1 TDD	N/A	CSI-RS.3.1 TDD	N/A	CSI-RS.3.1 TDD
CSI reporting periodicity	Config 1,2	ms	5	5		5	
OCNG Patterns			OP.1				
SMTC configuration			SMTC.1				
SSB configuration	Config 1,2		SSB.1 FR2	SSB.1 FR2		N/A	SSB.1 FR2
EPRE ratio of PSS to SSS		dB	0				
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
Propagation condition		-	AWGN				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							

Table A.5.5.3.6.1-4: OTA related test parameters

Parameter ^{Note 6}	Unit	Cell 3			Cell 4		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.3.15.1					
Assumption for UE beams ^{Note 7}		Rough			Rough		
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-112			-112		
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-102.97			-102.97		
$\hat{E}_s / N_{oc}$	dB	14			N/A	14	14
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-88.97			N/A	-88.97	-88.97
$\hat{E}_s / I_{ot}$	dB	14			N/A	14	14
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-59.81			-73.98	-59.81	-59.81

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	All parameters apply for configuration 1 and 2
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.3.6.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PSCell in the slot.

During T2 the UE shall start sending CSI reports for SCell1 and SCell2 with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.5.5.3.Y.1-2

- $T_{activation_time} = 5ms + T_{FineTiming} = 25ms$,

- $T_{CSI_Reporting} = 10ms$

- NR slot length is 0.125ms.

During T3 the UE shall stop sending CSI reports for both SCells no later than slot $n + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $m + \frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{NR\ slot\ length}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.5.5.3.7 Direct SCell activation at SCell addition of known SCell in FR2

A.5.5.3.7.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.4.5.3.5 except the SCell is in FR2 intra-band.

The supported test configurations are shown in table A.5.5.3.7.1-1 below. The general and cell specific test parameters are the same except those described in the following clause. The listed parameter values in Tables A.5.5.3.7.1-2 and A.5.5.3.7.1-3 will replace the values of corresponding parameters in Tables A.4.5.3.5.1-2 and A.4.5.3.5.1-3. In this case, OTA related test parameters are shown in table A.5.5.3.7.1-4 below.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, each with one cell. Cell 1 operates in either FDD or TDD duplex mode according to test configuration. Cell 2 and Cell 3 operate in TDD duplex mode. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) and Cell 2 (PSCell) on radio channel 2 (PSCC), but is not aware of Cell 3 (SCell1) on radio channel 3 (SCC). The UE is only monitoring the PCC/PSCC. The UE shall be continuously scheduled in the PCell/PSCell throughout the whole test.

At the beginning of T1, the UE is configured to measure radio channel 3 and starts detecting the Cell 3 (SCell) on radio channel 3 (SCC). During T1 Cell 3 is detected and measured and measurement report is sent by the UE to the test equipment.

Time period T2 starts when test equipment sends the *RRCConnectionReconfiguration* message for the activation of the SCell within time period specified in clause 8.3.2 for known cell definition to ensure the configured SCell is known. The NR shall be use an *RRCConnectionReconfigurationComplete* message with parameter *sCellState* set to *activated* for the SCell (Cell 3), which causes the SCell to become configured and activated on radio channel 3 (SCC). The message is sent from the test equipment to the UE and is received in a subframe # denoted *m* at the UE antenna connector. The UE shall accomplish the activation of the SCell no later than subframe ($m + N_{direct}$).

Time period T3 starts at ($m + N_{direct}$), at which point UE shall be reporting a valid CQI for PCell/PSCell and SCell.

During T3, the UE shall be continuously scheduled in the SCell.

The test equipment verifies the activation time by counting the subframes from the time when the direct SCell activation is sent and until a CSI report with other than CQI index 0 is received.

The test equipment verifies the CSI report from the direct activated SCell after the activation procedure is completed contains CQI index other than 0.

Table A.5.5.3.7.1-1: Supported test configurations for FR2 SCell activation case with FR2 PSCell

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.5.3.7.1-2: General test parameters for FR2 SCell activation case with FR2 PSCell

Parameter	Unit	Value	Comment
RF Channel Number		1, 2, 3	Two radio channels are used for this test. One for E-UTRA cell and two for NR Cell
Active PCell		Cell1	PCell on RF channel number 1. As specified in clause A.3.7.2.2
Active PSCell		Cell2	PSCell on RF channel number 2.
Deconfigured deactivated SCell		Cell3	Deconfigured deactivated secondary cell on RF channel number 3
DRX		OFF	Continuous monitoring of PCell/PSCell
PRACH configuration on cell2		FR2 configuration 2	Captured in A.3.8.3.2
PSCell CQI/PMI periodicity and offset configuration index		slot5	CQI reporting for PSCell every uplink slot
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on carrier frequency of cell1.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on carrier frequency of cell2.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on carrier frequency of cell3.

T1	s	7	During this time the PCell/PSCell shall be known and cell3 is detected, and UE shall report a valid CQI for PCell/PSCell.
T2	s	N_{direct}	During this time the UE shall be configured with directly activated SCell1.
T3	s	1	During this time the UE shall report a valid CQI for PCell/PSCell and SCell.

Table A.5.5.3.7.1-3: Cell specific test parameters for FR2 SCell activation case with FR2 PSCell

Parameter ^{Note 5}	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
SSB ARFCN		freq1			freq2		
Duplex mode		TDD			TDD		
TDD configuration		TDDConf.3.1			TDDConf.3.1		
BW _{channel}	MHz	100: N _{RB,c} = 66			100: N _{RB,c} = 66		
PDSCH Reference measurement channel		SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET Reference Channel		CR.3.1 TDD			CR.3.1 TDD		
RMC CORESET Reference Channel		CCR.3.1 TDD			CCR.3.1 TDD		
DL initial BWP configuration					DLBWP.0.1		
DL dedicated BWP configuration					DLBWP.1.1		
UL initial BWP configuration					ULBWP.0.1		
UL dedicated BWP configuration					ULBWP.1.1		
OCNG Patterns					OP.1		
SMTC configuration					SMTC.1		
SSB configuration					SSB.1 FR2		
TCI state					TCI.State.0		
TRS configuration					TRS.2.1 TDD		
CSI-RS configuration for CSI reporting					CSI-RS.3.1 TDD		
reportConfigType		periodic			N/A		
reportQuantity		cri-RI-PMI-CQI			N/A		
CSI reporting periodicity	slot	40			N/A		
CSI reporting offset	slot	4			N/A		
PDSCH/PDCCH subcarrier spacing	kHz				120		
EPRE ratio of PSS to SSS	dB				0		
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG DMRS to SSS ^{Note 1}							
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}							
Propagation conditions					AWGN		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5:	All parameters apply for configuration 1 and 2.						

Table A.5.5.3.7.1-4: OTA related test parameters for FR2 SCell activation case with FR2 PSCell

Parameter ^{Note 6}	Unit	Cell 2	Cell 3
-----------------------------	------	--------	--------

		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.3.15.1					
Assumption for UE beams ^{Note 7}		Rough			Rough		
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-104.7			-104.7		
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-95.7			-95.7		
$\hat{E}_s/N_{oc}$	dB	7			7		
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-88.7			-88.7		
$\hat{E}_s/I_{ot}$	dB	7			7		
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-58.92			-58.92		
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 2:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone						
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone						
Note 6:	All parameters apply for configuration 1 and 2						
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.5.5.3.7.2 Test Requirements

The UE shall accomplish the activation of the SCell no later than subframe $m+N_{direct}$ as defined in clause 8.3.4.

Time period T3 starts at $(m+N_{direct})$, at which point UE shall be reporting a valid CQI for both PCell and SCell.

During T3 the UE shall send CSI reports for SCell with non-zero CQI index and continue to send CSI reports for SCell 1 with non-zero CQI index until the end of T3. All of the above test requirements shall be fulfilled in order for the observed SCell1 direct activation delay to be counted as correct. The rate of correct observed SCell1 direct activation delay during repeated tests shall be at least 90%.

A.5.5.3.8 Fast SCell Activation of SCell in FR2 intra-band

A.5.5.3.8.1 Test Purpose and Environment

The purpose of this test is to verify that the fast SCell activation and deactivation times are within the requirements stated in clause 8.3.16, when the SCell in FR2 is known by the UE at the time of activation.

The supported test configurations are shown in table A.5.5.3.8-1 below. The test parameters are given in Tables A.5.5.3.8-2 and cell-specific parameters in A.5.5.3.8-3 below. The test consists of two successive time periods, with duration of T1 and T2, respectively. There are three carriers, E-UTRA has one cell, NR has two cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRA and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test. In this case, OTA related test parameters are shown in table A.5.5.3.8.1-4 below.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on NR. The UE now starts monitoring the SCell. The test equipment sends a MAC message for activation of the SCell and triggering the aperiodic CSI-RS for fast SCell activation.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m (where $m \bmod 20 = 1$), defines the start of time period T_2 . The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3.16. The UE shall start reporting CSI in PSCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $(m+k)$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

Table A.5.5.3.8.1-1: Supported test configurations for FR2 SCell activation case with FR2 PSCell

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.5.3.8.1-2: General test parameters for FR2 SCell activation case with FR2 PSCell

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	One E-UTRAN radio channel (1) and two NR radio channel (2,3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on E-UTRA RF channel number	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on secondary component carrier.
Cell3 timing offset to cell2	μs	0	
Time alignment error between cell3 and cell2	μs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
A3-offset	dB	-15	

T_{HARQ}	ms	k_1 NR slot length	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by <i>dl-DataToUL-ACK</i> if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
$T_{\text{CSI_Reporting}}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe}, \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.5.5.3.8.1-3: Cell specific test parameters for FR2 SCell activation case with FR2 PSCell

Parameter ^{Note 5}	Unit	Cell 2		Cell 3	
		T1	T2	T1	T2
SSB ARFCN		freq1		freq2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		66		66	
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD		CR.3.1 TDD	
RMC CORESET Reference Channel		CCR.3.1 TDD		CCR.3.1 TDD	
DL initial BWP configuration		DLBWP.0.1			
DL dedicated BWP configuration		DLBWP.1.1			
UL initial BWP configuration		ULBWP.0.1			
UL dedicated BWP configuration		ULBWP.1.1			
OCNG Patterns		OP.1			
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2			
Aperiodic CSI-RS for SCell activation		-		TRS.2.3	
gapBetweenBursts	slots	N/A			
TCI state		TCI.State.0			
TRS configuration		TRS.2.1 TDD			
CSI-RS configuration for CSI reporting		CSI-RS.3.1 TDD			
reportConfigType		periodic		N/A	
reportQuantity		cri-RI-PMI-CQI		N/A	
CSI reporting periodicity	slot	40		N/A	
CSI reporting offset	slot	4		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	120			
EPRE ratio of PSS to SSS	dB	0			
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					

EPRE ratio of PDSCH to PDSCH_DMRS		
EPRE ratio of OCNG DMRS to SSS ^{Note 1}		
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}		
Propagation conditions		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: Void		
Note 3: Void		
Note 4: Void		
Note 5: All parameters apply for configuration 1 and 2.		

Table A.5.5.3.8.1-4: OTA related test parameters for FR2 SCell activation case with FR2 PSCell

Parameter ^{Note 6}	Unit	Cell 2		Cell 3	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 1 according to A.3.15.1			
Assumption for UE beams ^{Note 7}		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-104.7		-104.7	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-95.7		-95.7	
$\hat{E}_s/N_{oc}$	dB	7		7	
SS_RP ^{Note2}	dBm/SCS ^{Note4}	-88.7		N/A	
CSI-RS_RP ^{Note2}	dBm/SCS ^{Note4}	N/A		-88.7	
$\hat{E}_s/I_{ot}$	dB	7		7	
Io ^{Note2}	dBm/95.04 MHz ^{Note4}	-58.92		-58.92	
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2:	Es/Iot, SS_RP, CSI_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	Void				
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone				
Note 5:	Void				
Note 6:	All parameters apply for configuration 1 and 2				
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.5.3.8.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to interruption. Whether CSI report in slot (m+k) was interrupted is checked by monitoring ACK/NACK sent in PCell in slot (m+k).

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $m + \frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstATRS} + 5ms$, as defined in clause 8.3.

During T2 interruption of PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{NR slot length}} + N_{\text{interruption}}$.

The interruption of PSCell shall not be more than the values specified for EN-DC in Clause 8.2.1.2.4.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.5.5.3.9 PUCCH SCell Activation and deactivation of known SCell in FR2

A.5.5.3.9.1 Test Purpose and Environment

The purpose of this test is to verify that the PUCCH SCell activation and deactivation times are within the requirements stated in clause 8.3, when the PUCCH SCell is in FR2.

The supported test configurations are shown in table A.5.5.3.9.1-1 below. The test parameters are the same as in clause A.4.5.3.3.1 except those described in the following clause. The listed parameter values in Tables A.5.5.3.9.1-2 will replace the values of corresponding parameters in Tables A.4.5.3.3.1-2. The listed parameter values in Tables A.5.5.3.9.1-3 will replace the values of corresponding parameters in Tables A.4.5.3.3.1-3. In this case, OTA related test parameters are shown in table A.5.5.3.9.1-4 below.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, E-UTRA has one cell (Cell 1), and NR has two cells, PSCell (Cell 2) in FR1 and PUCCH SCell (Cell 3) in FR2. Cell 1 and Cell 2 have constant signal levels throughout the test. Cell1, Cell2 and Cell 3 are in primary Timing Advance Group (pTAG). UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment for sTAG.

Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRAN and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (PUCCH SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell 3) becomes configured on NR. The UE now starts monitoring the SCC. The test equipment sends a MAC message for activation of the PUCCH SCell.

The point in time at which the MAC message is received at the UE antenna connector provided that the HARQ ACK of the MAC message is received by TE, in slot # denoted n, defines the start of time period T2. The UE shall be able to report valid CSI on for the activated PUCCH SCell on PUCCH SCell at latest in slot $n + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + \lceil X \rceil + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3.

Time period T3 starts when a MAC message for deactivation of PUCCH SCell, sent from the test equipment to the UE in a slot # denoted m, is received at the UE antenna connector provided that the HARQ ACK of the MAC message is received by TE. The UE shall carry out deactivation of the PUCCH SCell in a slot $m + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PSCell during activation of PUCCH SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the PUCCH SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the PUCCH SCell deactivation command is sent until CSI reporting for PUCCH SCell is discontinued.

Table A.5.5.3.9.1-1: FR2 SCell activation in non-DRX test configurations with FR1 PSCell

Configuration	Description
1	LTE FDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD PCell, Cell 2 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5	LTE TDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
6	LTE TDD PCell, Cell 2 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.3.9.1-2: General test parameters for FR2 SCell activation case with FR1 PSCell

Parameter	Unit	Value	Comment
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2
T2	s	2	During this time the UE shall activate the SCell.

Table A.5.5.3.9.1-3: Cell specific test parameters for FR2 SCell activation case with FR1 PSCell

Parameter		Unit	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2		
Duplex mode	Config 1,4		FDD			TDD		
	Config 2,3,5,6		TDD			TDD		
TDD configuration	Config 1,4		Not Applicable			TDDConf.3.1		
	Config 2,5		TDDConf.1.1					
	Config 3,6		TDDConf.2.1					
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52			100: N _{RB,c} = 66		
	Config 2,5		10: N _{RB,c} = 52					
	Config 3,6		40: N _{RB,c} = 106					
Data RBs allocated	Config 1,4		52			66		
	Config 2,5		52					
	Config 3,6		106					
BWP BW	Config 1,4		10: N _{RB,c} = 52			100: N _{RB,c} = 66		
	Config 2,5		10: N _{RB,c} = 52					
	Config 3,6		40: N _{RB,c} = 106					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD			SR.3.1 TDD		
	Config 2,5		SR.1.1 TDD					
	Config 3,6		SR.2.1 TDD					
	Config 1,4		CR.1.1 FDD			CR.3.1 TDD		

RMSI CORESET Reference Channel		Config 2,5		CR.1.1 TDD		
		Config 3,6		CR.2.1 TDD		
RMC CORESET Reference Channel		Config 1,4		CCR.1.1 FDD		CCR.3.1 TDD
		Config 2,5		CCR.1.1 TDD		
		Config 3,6		CCR.2.1 TDD		
OCNG Patterns				OP.1		
SMTc configuration				SMTc.1		
TCI state				NA	TCI.State.0	
TRS configuration	Config 1,4			TRS.2.1 TDD	TRS.2.1 TDD	
	Config 2,5			TRS.1.1 TDD		
	Config 3,6			TRS.1.2 TDD		
SSB configuration	Config 1,2,4,5	kHz		SSB.1 FR1	SSB.1 FR2	
	Config 3,6			SSB.2 FR1		
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5			15 kHz	120 kHz	
	Config 3,6			30 kHz		
CSI-RS configuration	Config 1~6				NA	NA
reportConfigType	Config 1~6			NA	periodic	
reportQuantity	Config 1~6			NA	cri-RI-PMI-CQI	
CSI reporting periodicity Note 6	Config 1~6		slot	NA	40	
CSI reporting offset	Config 1~6		slot	NA	4	
EPRE ratio of PSS to SSS			dB	0		
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
Propagation condition			-	N/A Link only, see clause A.3.7A		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void						
Note 3: Void						
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.						
Note 5: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+T _{LL-RSRP} during T2.						
Note 6: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.						

Table A.5.5.3.9.1-4: OTA related test parameters for FR2 SCell activation case with FR1 PSCell

Parameter		Unit	Cell 2			Cell 3				
			T1	T2	T3	T1	T2	T3		
Angle of arrival configuration			NA			Setup 1 according to clause A.3.15.1				
Assumption for UE beams ^{Note 7}			NA			Rough				
N_{oc} ^{Note1}		dBm/15kHz	Link only, see clause A.3.7A			-104.7				
N_{oc} ^{Note1}	Config 1,2,4,5	dBm/SCS				-95.7				
	Config 3,6									
SSB_RP ^{Note2}	Config 1,2,4,5	dBm/SCS ^{Note3}				-88.7			-88.7	-88.7
	Config 3,6									

$\hat{E}_s/N_{oc}$	Config 1,2,3,4,5,6	dB	7	7	7
$\hat{E}_s/I_{ot}$		dB	7	7	7
Io ^{Note2, Note 4}	Config 1,2,4,5	dBm/95.04 MHz	-58.92	-58.92	-58.92
	Config 3,6				
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: Void					
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone					
Note 5: Void					
Note 6: Void					
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.					

A.5.5.3.9.2 Test Requirements

During T2 the UE shall start sending CSI reports for PUCCH SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ} + T_{activation_time} + [X] + T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstSSB} + 5ms$, as defined in clause 8.3.

During T3 the UE shall stop sending CSI reports for PUCCH SCell at latest in a slot $m + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

All of the above test requirements shall be fulfilled in order for the observed PUCCH SCell activation delay and PUCCH SCell deactivation delay to be counted as correct. The rate of correct observed PUCCH SCell activation delay and PUCCH SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in slot $n + \frac{T_{HARQ} + T_{activation_time} + [X] + T_{CSI_Reporting}}{NR\ slot\ length}$ then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.5.5.3.10 PUCCH SCell Activation and deactivation of unknown SCell in FR2

A.5.5.3.10.1 Test Purpose and Environment

The purpose of this test is to verify that the PUCCH SCell activation and deactivation times are within the requirements stated in clause 8.3, when the PUCCH SCell is in FR2.

The supported test configurations are shown in table A.5.5.3.10.1-1 below. The test parameters are the same as in clause A.4.5.3.3.1 except those described in the following clause. The listed parameter values in Tables A.5.5.3.10.1-2 will replace the values of corresponding parameters in Tables A.4.5.3.3.1-2. The listed parameter values in Tables A.5.5.3.10.1-3 will replace the values of corresponding parameters in Tables A.4.5.3.3.1-3. In this case, OTA related test parameters are shown in table A.5.5.3.10.1-4 below.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, E-UTRA has one cell (Cell 1), and NR has two cells, PSCell (Cell 2) in FR1 and PUCCH SCell (Cell 3) in FR2. Cell 1 and Cell 2 have constant signal levels throughout the test.

Cell1, Cell2 are in primary Timing Advance Group (pTAG), and Cell3 is in secondary Timing Advance Group (sTAG). The TimeAlignmentTimer of sTAG expires before receiving the activation command.

Before the test starts the UE is connected to Cell 1 (PCell) on E-UTRAN and Cell 2 (PSCell) on NR, but is not aware of Cell 3 (PUCCH SCell) on NR. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell 3) becomes configured on NR.

The point in time at which the MAC message is received at the UE antenna connector provided that the HARQ ACK of the MAC message is received by TE, in slot # denoted n, defines the start of time period T2. The UE shall be able to report valid CSI on for the activated PUCCH SCell on PUCCH SCell at latest in slot $n + \frac{T_{\text{HARQ}} + T_{\text{delay_PUCCH_SCell}}}{\text{NR slot length}}$, as defined in clause 8.3.

Time period T3 starts when a MAC message for deactivation of PUCCH SCell, sent from the test equipment to the UE in a slot # denoted m, is received at the UE antenna connector provided that the HARQ ACK of the MAC message is received by TE. The UE shall carry out deactivation of the PUCCH SCell in a slot $m + \frac{T_{\text{HARQ}} + 3ms}{\text{NR slot length}}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PSCell during activation of PUCCH SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the PUCCH SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the PUCCH SCell deactivation command is sent until CSI reporting for PUCCH SCell is discontinued.

Table A.5.5.3.10.1-1: FR2 SCell activation in non-DRX test configurations with FR1 PSCell

Configuration	Description
1	LTE FDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD PCell, Cell 2 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5	LTE TDD PCell, Cell 2 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
6	LTE TDD PCell, Cell 2 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Cell 3 NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.3.10.1-2: General test parameters for FR2 SCell activation case with FR1 PSCell

Parameter	Unit	Value	Comment
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2
T2	s	2	During this time the UE shall activate the SCell.

Table A.5.5.3.10.1-3: Cell specific test parameters for FR2 SCell activation case with FR1 PSCell

Parameter	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
SSB ARFCN		freq1			freq2		

Duplex mode	Config 1,4		FDD	TDD	
	Config 2,3,5,6		TDD	TDD	
TDD configuration	Config 1,4		Not Applicable	TDDConf.3.1	
	Config 2,5		TDDConf.1.1		
	Config 3,6		TDDConf.2.1		
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52	100: N _{RB,c} = 66	
	Config 2,5		10: N _{RB,c} = 52		
	Config 3,6		40: N _{RB,c} = 106		
Data RBs allocated	Config 1,4		52	66	
	Config 2,5		52		
	Config 3,6		106		
BWP BW	Config 1,4		10: N _{RB,c} = 52	100: N _{RB,c} = 66	
	Config 2,5		10: N _{RB,c} = 52		
	Config 3,6		40: N _{RB,c} = 106		
DRx Cycle		ms	Not Applicable		
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.3.1 TDD	
	Config 2,5		SR.1.1 TDD		
	Config 3,6		SR.2.1 TDD		
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.3.1 TDD	
	Config 2,5		CR.1.1 TDD		
	Config 3,6		CR.2.1 TDD		
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.3.1 TDD	
	Config 2,5		CCR.1.1 TDD		
	Config 3,6		CCR.2.1 TDD		
OCNG Patterns			OP.1		
SMTc configuration			SMTc.1		
TCI state			NA	TCI.State.0	
TRS configuration	Config 1,4		TRS.2.1 TDD	TRS.2.1 TDD	
	Config 2,5		TRS.1.1 TDD		
	Config 3,6		TRS.1.2 TDD		
SSB configuration	Config 1,2,4,5		SSB.1 FR1	SSB.1 FR2	
	Config 3,6		SSB.2 FR1		
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	120 kHz	
	Config 3,6		30 kHz		
CSI-RS configuration	Config 1~6		NA	NA	CSI-RS.3.1 TDD Note 5
reportConfigType	Config 1~6		NA	periodic	
reportQuantity	Config 1~6		NA	cri-RI-PMI-CQI	
CSI reporting periodicity Note 6	Config 1~6	slot	NA	40	
CSI reporting offset	Config 1~6	slot	NA	4	
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
Propagation condition		-	N/A Link only, see clause A.3.7A		AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Void
Note 3:	Void
Note 4:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5:	CSI-RS for CSI measurement is (re)configured in the next DL slot after slot $m+T_{L1-RSRP}$ during T2.
Note 6:	L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.

Table A.5.5.3.10.1-4: OTA related test parameters for FR2 SCell activation case with FR1 PSCell

Parameter		Unit	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
Angle of arrival configuration			NA			Setup 1 according to clause A.3.15.1		
Assumption for UE beams ^{Note 7}			NA			Rough		
N_{oc} ^{Note1}		dBm/15kHz	Link only, see clause A.3.7A			-104.7		
N_{oc} ^{Note1}	Config 1,2,4,5	dBm/SCS				-95.7		
	Config 3,6							
SSB_RP ^{Note2}	Config 1,2,4,5	dBm/SCS ^{Note3}				-88.7	-88.7	-88.7
	Config 3,6							
$\hat{E}_s/N_{oc}$	Config 1,2,3,4,5,6	dB				7	7	7
$\hat{E}_s/I_{ot}$		dB				7	7	7
I_o ^{Note2, Note 4}	Config 1,2,4,5	dBm/95.04 MHz				-58.92	-58.92	-58.92
	Config 3,6							
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 2: E_s/I_{ot} , SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 3: Void								
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone								
Note 5: Void								
Note 6: Void								
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.								

A.5.5.3.10.2 Test Requirements

During T2 the UE shall start sending CSI reports for PUCCH SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ} + T_{delay_PUCCH_SCell}}{NR\ slot\ length}$, as defined in clause 8.3.

During T3 the UE shall stop sending CSI reports for PUCCH SCell at latest in a slot $m + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

All of the above test requirements shall be fulfilled in order for the observed PUCCH SCell activation delay and PUCCH SCell deactivation delay to be counted as correct. The rate of correct observed PUCCH SCell activation delay and PUCCH SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in slot $n + \frac{T_{HARQ} + T_{delay_PUCCH_SCell}}{NR\ slot\ length}$ then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.5.5.3.11 Multiple SCell activation and deactivation of one known PUCCH SCell and one unknown SCell in FR2

A.5.5.3.11.1 Test Purpose and Environment

The purpose of this test is to verify that the PUCCH SCell with multiple SCell activation and deactivation delay requirement defined in clause 8.3, and interruption requirement defined in clause 8.2, when one known PUCCH SCell and one unknown SCell to be activated are in FR2.

The supported test configurations are shown in Table A.5.5.3.11.1-1 below. The general test parameters are given in Table A.5.5.3.11.1-2 and cell-specific test parameters in Table A.5.5.3.11.1-3 below. OTA related test parameters are shown in table A.5.5.3.11.1-4.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are four carriers, one E-UTRA cell, and three NR cells. Before the test starts the UE is connected to Cell 1 (PCell) on the E-UTRA carrier and Cell 2 (PSCell) on the NR carrier in FR2, but is not aware of Cell 3 (PUCCH SCell) or Cell 4 (SCell) on the NR carriers both in FR2. Cell 2 and Cell 4 are in the primary PUCCH group, and Cell 3 is in the secondary PUCCH group. In addition, Cell 2 and Cell 4 are in primary Timing Advance Group (pTAG), and Cell 3 is in the secondary Timing Advance Group (sTAG). Cell 1, Cell 2 and Cell 3 have constant signal levels throughout the test. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

There are two sub tests in this section.

- For Test 1 (valid TA case), UE is provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment for sTAG.
- For Test 2 (invalid TA case), TimeAlignmentTimer of sTAG expires before UE receives the activation command

At the beginning of T1 the UE receives an RRC message by which the Cell 3 (PUCCH SCell) and Cell 4 (SCell) are configured on NR. The test equipment sends a single MAC message for activation of both Cell 3 and Cell 4 within 3s for UE power class 2/3/4 or 4s for UE power class 1 after RRM reports is sent for Cell 3.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m , defines the start of time period T2. In the same MAC PDU, the test equipment activates the TCI state of RMC CORESET. In slot # m , the test equipment also sends an RRC message to configure the CSI-RS resources for both Cell 3 and Cell 4.

During T2, the UE shall be able to report valid CSI on PUCCH SCell for the activated PUCCH SCell at latest in

- slot $m + T_{\text{activate_total_PUCCH_SCell}}$ as defined in clause 8.3.13.

During T2, the UE shall be able to report valid CSI on PCell for the activated SCell at latest in

- slot $m + T_{\text{activate_total_other_SCell}}$ as defined in clause 8.3.13.

Any PCell and PSCell interruption due to activation of PUCCH SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + T_{\text{activate_total_PUCCH_SCell}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2.

Any PCell and PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + T_{\text{activate_total_other_SCell}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2.

Time period T3 starts when a MAC message for deactivation of both Cell 3 and Cell 4, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector. The UE shall carry out deactivation of the PUCCH SCell in a slot $m + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3, and the starting point of any PCell interruption due to the deactivation shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of PUCCH SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for SCell is discontinued.

Table A.5.5.3.11.1-1: Supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.3.11.1-2: General test parameters

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3,4	One E-UTRAN radio channel (1) and three NR radio channels (2,3,4) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2 in FR1.
Configured deactivated PUCCH SCell		Cell 3	Configured deactivated secondary cell with PUCCH on NR RF channel number 3 in FR2
Configured deactivated SCells		Cell 4	Configured deactivated secondary cell on NR RF channel number 4 in FR2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
SCell measurement cycle (measCycleSCell)	ms	160	For both Cell 3 and Cell 4
T1	s	7	During this time the PSCell shall be known and the SCells configured, PUCCH SCell detected but SCell not detected.
T2	s	1	During this time the UE shall activate both the SCells.
T3	s	1	During this time the UE shall deactivate the SCells.
T_{HARQ}	ms	$k_1 \times \text{NR slot length}$	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by <i>dl-DataToUL-ACK</i> if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe}\mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.5.5.3.11.1-3: Cell specific test parameters

Parameter		Unit	Cell 2			Cell 3			Cell 4		
			T1	T2	T3	T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2			freq3		
Duplex mode	Config 1,2		TDD								
TDD configuration	Config 1,2		TDDConf.3.1								
BW _{channel}	Config 1,2	MHz	100: N _{RB,c} = 66								
DL initial BWP configuration	Config 1,2		DLBWP.0.1								
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1								
UL initial BWP configuration	Config 1,2		ULBWP.0.1								
UL dedicated BWP configuration	Config 1,2		ULBWP.1.1								
Timing offset to Cell 2		ms	Not Applicable			0			0		
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD			SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD			CR.3.1 TDD			CR.3.1 TDD		
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD			CCR.3.1 TDD			CCR.3.1 TDD		
TRS configuration	Config 1,2		TRS.2.1 TDD			TRS.2.1 TDD			TRS.2.1 TDD		
CSI-RS configuration	Config 1,2		CSI-RS.3.1 TDD			N/A	CSI-RS.3.1 TDD		N/A	CSI-RS.3.1 TDD	
CSI reporting periodicity	Config 1,2	ms	5			5			5		
OCNG Patterns			OP.1								
SMTC configuration			SMTC.1								
SSB configuration	Config 1,2		SSB.1 FR2			SSB.1 FR2			N/A	SSB.1 FR2	
EPRE ratio of PSS to SSS		dB	0								
EPRE ratio of PBCH DMRS to SSS											
EPRE ratio of PBCH to PBCH DMRS											
EPRE ratio of PDCCH DMRS to SSS											
EPRE ratio of PDCCH to PDCCH DMRS											
EPRE ratio of PDSCH DMRS to SSS											
EPRE ratio of PDSCH to PDSCH											
EPRE ratio of OCNG DMRS to SSS(Note 1)											
EPRE ratio of OCNG to OCNG DMRS (Note 1)											
Propagation condition		-	AWGN								
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all QEDM symbols.											

Table A.5.5.3.11.1-4: OTA related test parameters

Parameter ^{Note 6}	Unit	Cell 2 and 3			Cell 4		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.3.15.1					
Assumption for UE beams ^{Note 7}		Rough			Rough		
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-112			-112		
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-102.97			-102.97		
$\hat{E}_s/N_{oc}$	dB	14			N/A	14	14
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-88.97			N/A	-88.97	-88.97
$\hat{E}_s/I_{ot}$	dB	14			N/A	14	14
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-59.81			-73.98	-59.81	-59.81
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone							
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone							
Note 6: All parameters apply for configuration 1 and 2							
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation							

A.5.5.3.11.2 Test Requirements

During T2 the UE shall start sending CSI reports for Cell 3 with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + T_{\text{activate_total_PUCCH_SCell}}$, as defined in clause 8.3.

During T2 the UE shall start sending CSI reports for Cell 4 with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + T_{\text{activate_total_other_SCell}}$, as defined in clause 8.3.

During T3 the UE shall stop sending CSI reports for both SCells no later than slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

During T2 interruption of PCell and PSCell during PUCCH SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + T_{\text{activate_total_PUCCH_SCell}} + N_{\text{interruption}}$, as defined in clause 8.3.

During T2 interruption of PCell and PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + T_{\text{activate_total_other_SCell}} + N_{\text{interruption}}$, as defined in clause 8.3.

During T3 the starting point of interruption of PCell and PSCell during the deactivation of PUCCH SCell and SCell shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

The interruption on any activated serving cell shall not be more than the summation of interruption length due to PUCCH SCell activation/deactivation and interruption length due to SCell activation/deactivation, the values of interruption length are specified for EN-DC in clause 8.2.

All of the above test requirements shall be fulfilled in order for the observed SCells activation delay to be counted as correct. The rate of correct observed SCells activation delay and SCells deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI for PUCCH SCell in a slot $m + T_{\text{activate_total_PUCCH_SCell}}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI for SCell in a slot $m + T_{\text{activate_total_other_SCell}}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.5.5.3.12 SCell Activation and deactivation of unknown PUCCH SCell and unknown DL SCell in FR2 in non-DRX

A.5.5.3.12.1 Test Purpose and Environment

The purpose of this test is to verify that the PUCCH SCell and DL SCell activation and deactivation times are within the requirements stated in clause 8.3.13, when the PUCCH SCell in FR2 and DL SCell in FR2 is unknown to the UE at the time of activation.

The supported test configurations are shown in table A.5.5.3.12.1-1 below. The test parameters are given in Tables A.5.5.3.12.1-2 and cell-specific parameters in A.5.5.3.12.1-3 below. OTA related test parameters are shown in table A.5.5.3.12.1-4.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are four carriers, each with one cell. Before the test starts the UE is connected to Cell 1(PCell) on the E-UTRA carrier and Cell 2 (PSCell) on the NR carrier in FR1, but is not aware of Cell3 (PUCCH SCell) and Cell4(DL SCell2) on the NR carriers both in FR2. The UE is monitoring the PCell and PSCell. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test. SCC of Cell 3 and SCC of Cell 4 are on a same band.

At the beginning of T1 the UE receives an RRC message by which the Cell 3 and Cell 4 becomes configured on NR. The test equipment sends a single MAC message for activation of both SCells.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m , defines the start of time period T2. In the same MAC PDU, the test equipment activates the TCI state of RMC CORESET. In slot # m , the test equipment also sends an RRC message to configure the CSI-RS resources for Cell3 and Cell4.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted n , is received at the UE antenna connector.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for SCell is discontinued.

Table A.5.5.3.12.1-1: Supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.3.12.1-2: General test parameters

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3,4	One E-UTRAN radio channel (1) and three NR radio channels (2,3,4) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1. As specified in clause A.3.7.2.2
Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2 in FR1.
Configured deactivated SCells		Cell 3 (PUCCH SCell), Cell 4(DL SCell 2)	Configured deactivated secondary cell on NR RF channel number 3 and RF channel number 4, both in FR2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
SCell measurement cycle (measCycleSCell)	ms	160	For both Cell 3 and Cell 4
TimeAlignmentTimer	ms	1280	Cell 1 and Cell 2 in pTAG.
TimeAlignmentTimerSTAG	ms	1280	Cell 3 and Cell 4 in sTAG
T1	s	1	During this time Cell 3 and Cell 4 is configured and undetected.
T2	s	2	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	$k_1 \times \text{NR slot length}$	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by <i>dl-DataToUL-ACK</i> if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe}\mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.5.5.3.12.1-3: Cell specific test parameters

Parameter		Unit	Cell 2			Cell 3			Cell 4		
			T1	T2	T3	T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2			freq3		
Duplex mode	Config 1,2		TDD								
TDD configuration	Config 1,2		TDDConf.3.1								
BW _{channel}	Config 1,2	MHz	100: N _{RB,c} = 66								
DL initial BWP configuration	Config 1,2		DLBWP.0.1								
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1								
UL initial BWP configuration	Config 1,2		ULBWP.0.1								
UL dedicated BWP configuration	Config 1,2		ULBWP.1.1								
Timing offset to Cell 2		ms	Not Applicable			0			0		
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD			SR.3.1 TDD			SR.3.1 TDD		

RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD	CR.3.1 TDD		CR.3.1 TDD	
RMC CORESET Reference Channel	Config 1,2		CCR.3.1 TDD	CCR.3.1 TDD		CCR.3.1 TDD	
TRS configuration	Config 1,2		TRS.2.1 TDD	TRS.2.1 TDD		TRS.2.1 TDD	
CSI-RS configuration	Config 1,2		CSI-RS.3.1 TDD	N/A	CSI-RS.3.1 TDD	N/A	CSI-RS.3.1 TDD
CSI reporting periodicity	Config 1,2	ms	5	5		5	
OCNG Patterns			OP.1				
SMTC configuration			SMTC.1				
SSB configuration	Config 1,2		SSB.1 FR2	SSB.1 FR2		N/A	SSB.1 FR2
EPRE ratio of PSS to SSS		dB	0				
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
Propagation condition		-	AWGN				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							

Table A.5.5.3.12.1-4: OTA related test parameters

Parameter ^{Note 6}	Unit	Cell 2			Cell 3			Cell 4		
		T1	T2	T3	T1	T2	T3	T1	T2	T3
Angle of arrival configuration		NA			Setup 1 according to A.3.15.1					
Assumption for UE beams ^{Note 7}		NA			Rough			Rough		
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	Link only, see clause A.3.7A			-112			-112		
N_{oc} ^{Note1}	dBm/SCS ^{Note3}				-102.97			-102.97		
$\hat{E}_s / N_{oc}$	dB				−∞	14	14	−∞	14	14
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}				−∞	-88.97	-88.97	−∞	-88.97	-88.97
$\hat{E}_s / I_{ot}$	dB				−∞	14	14	−∞	14	14
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}				-73.98	-59.81	-59.81	-73.98	-59.81	-59.81

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	All parameters apply for configuration 1 and 2
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.3.12.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PSCell in the slot.

During T2 the UE shall start sending CSI reports for SCell1 with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{T_{HARQ} + T_{delay_multiple_SCells_PUCCH_SCell}}{NR\ slot\ length}$, where

T_{HARQ} is defined in Table A.5.5.3.12.1-2

$T_{delay_multiple_SCells_PUCCH_SCell}$ is defined in section 8.13.13.1. In this test case, both valid TA and invalid TA cases shall be tested.

Test for case when UE has valid TA: the *TimeAlignmentTimer* [2] associated with the TAG containing the PUCCH SCell is running, and $T_{delay_multiple_SCells_PUCCH_SCell} = T_{activation_time_multiple_scells} + \max((T_{First_available_CSI} + T_{CSI_processing}), 3 * T_{target_PL-RS}) + T_{CSI_reporting_after}$.

Test for case when UE do not have valid TA: $T_{delay_multiple_SCells_PUCCH_SCell} = T_{activation_time_multiple_scells} + \max((T_{First_available_CSI} + T_{CSI_processing}), (T1+T2+T3), 3 * T_{target_PL-RS}) + T_{CSI_reporting_after}$

$T_{activation_time_multiple_scells}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario as specified in section 8.3.7

$T_{CSI_Reporting} = 10ms$

- NR slot length is 0.125ms.

During T2 the UE shall start sending CSI reports for SCell2 with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{T_{HARQ} + T_{delay_multiple_SCells_other_SCell}}{NR\ slot\ length}$ where

T_{HARQ} is defined in Table A.5.5.3.12.1-2

$T_{delay_multiple_SCells_other_SCell} = T_{activation_time_multiple_scells} + T_{CSI_Reporting}$.

- $T_{activation_time_multiple_scells}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario as specified in section 8.3.7

$T_{CSI_Reporting} = 10ms$

NR slot length is 0.125ms.

During T3 the UE shall stop sending CSI reports for both SCells no later than slot $n + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.14.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $m + \frac{T_{HARQ} + T_{delay_multiple_SCells_PUCCH_SCell}}{NR\ slot\ length}$, as defined in clause 8.3.13 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.5.5.4 Void

A.5.5.5 Beam Failure Detection and Link recovery procedures

A.5.5.5.1 EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with SSB-based BFD and LR in non-DRX mode

A.5.5.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.1.1-1, A.5.5.5.1.1-2, A.5.5.5.1.1-3 and A.5.5.5.1.1-4 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.1.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.5.5.5.1.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.5.5.5.1.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	LTE TDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
3	LTE FDD, TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
4	LTE TDD, TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.5.1.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Test Config	Unit	Value	Comment
			Test 1	
Active E-UTRA PCell	1-4		Cell 1	
E-UTRA RF Channel Number	1-4		1	

Active PCell	1-4		Cell 2	
RF Channel Number	1-4		2	
Duplex mode	1-4		TDD	
TDD Configuration	1-4		TDDConf.3.1	
BW _{channel}	1-4	MHz	100: N _{RB,c} = 66	
Data RBs allocated	1-4		66	
PDSCH/PDCCH subcarrier spacing	1-4	kHz	120	
DL initial BWP configuration	1-4		DLBWP.0.1	
DL dedicated BWP configuration	1-4		DLBWP.1.1	
UL initial BWP configuration	1-4		ULBWP.0.1	
UL dedicated BWP configuration	1-4		ULBWP.1.1	
PDSCH Reference Channel	1-2		SR.3.2 TDD	
	3-4		SR.3.3 TDD	
RMSI CORESET Reference Channel	1-2		CR.3.1 TDD	
	3-4		CR.3.2 TDD	
Dedicated CORESET Reference Channel	1-2		CCR.3.1 TDD	
	3-4		CCR.3.7 TDD	
OCNG parameters	1-4		OP.1	
CP length	1-4		Normal	
PDSCH/PDCCH TCI state	1-4		TCI.State.0	
CSI-RS for tracking	1-4		TRS.2.1 TDD	
SSB Configuration	1-2		SSB.1 FR2	
	3-4		SSB.2 FR2	
SMTC Configuration	1-4		SMTC.3	
PRACH Configuration	1-4		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration	1-4		OFF	
SSB index assigned as BFD RS (q ₀)	1-4		0	
SSB index assigned as CBD RS (q ₁)	1-4		1	
SSB index assigned as RLM RS	1-4		0,1	
Beam failure detection transmission parameters	DCI format	1-4	1-0	
	Number of Control OFDM symbols	1-4	2	
	Aggregation level	1-4	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-4	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-4	dB	0
	DMRS precoder granularity	1-4		REG bundle size
	REG bundle size	1-4		6
Gap pattern ID	1-4		gp0	
gapOffset	1-4	ms	0	
rlmInSyncOutOfSyncThreshold	1-4		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1-2	dBm/SCS	-95	Threshold used for Q _{in_LR_SSB}
	3-4		-92	
powerControlOffsetSS	1-4		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1-4		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1-4		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1-4		CSI-RS.3.1 TDD	
reportConfigType	1-4		periodic	

reportQuantity	1-4		cri-RI-PMI-CQI	
CSI reporting periodicity	1-4	slot	40	
CSI reporting offset	1-4	slot	4	
T310	1-4	ms	1000	
N310	1-4		2	
T1	1-4	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-4	s	2.61	
T3	1-4	s	1.64	
T4	1-4	s	0	
T5	1-4	s	1.01	
D1	1-4	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.5.5.1.1-3: Cell specific test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1-4	dB	5 ^{Note 11}	-3 ^{Note 11}	-12	-12	-12
SNR_SSB of set q_1	Config 1-4	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of set q_1	Config 1-2	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 3-4		-101.5	-101.5	-81.5	-81.5	-81.5
N_{oc}	Config 1-4	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
- Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.1.1-1.
- Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
- Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
- Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.5.5.1.1-4: Void

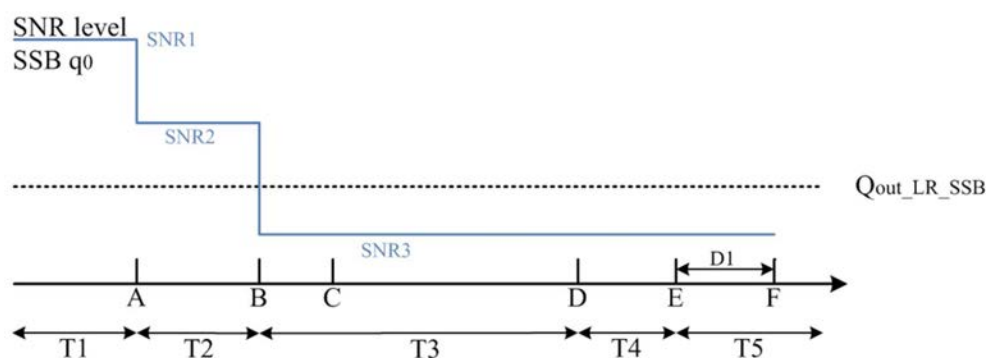


Figure A.5.5.1.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

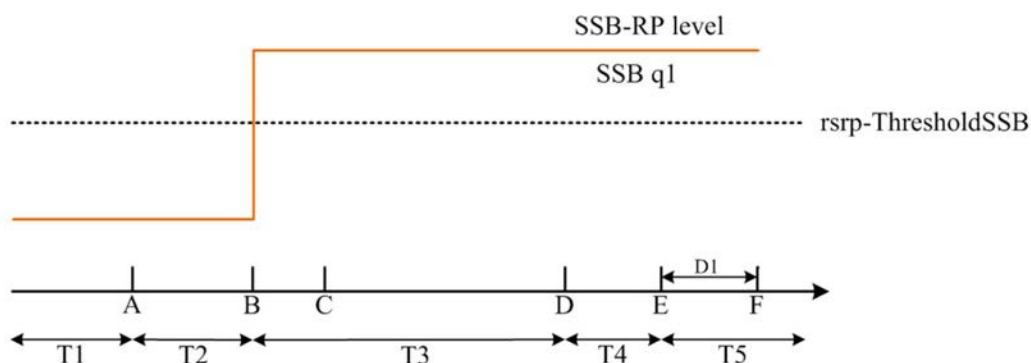


Figure A.5.5.1.1-2: SSB_RP level variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.5.5.5.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 960 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.2 EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with SSB-based BFD and LR in DRX mode

A.5.5.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.2.1-1, A.5.5.5.2.1-2, A.5.5.5.2.1-3, A.5.5.5.2.1-4 and A.5.5.5.2.1-5 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.2.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.5.5.5.2.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.5.5.5.2.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	LTE TDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
3	LTE FDD, TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
4	LTE TDD, TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.2.1-2: General test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-4		Cell 1	
E-UTRA RF Channel Number		1-4		1	
Active PCell		1-4		Cell 2	
RF Channel Number		1-4		2	
Duplex mode		1-4		TDD	
TDD Configuration		1-4		TDDConf.3.1	
BW _{channel}		1-4	MHz	100: N _{RB,C} = 66	
Data RBs allocated		1-4		66	
PDSCH/PDCCH subcarrier spacing		1-4	kHz	120	
DL initial BWP configuration		1-4		DLBWP.0.1	
DL dedicated BWP configuration		1-4		DLBWP.1.1	
UL initial BWP configuration		1-4		ULBWP.0.1	
UL dedicated BWP configuration		1-4		ULBWP.1.1	
PDSCH Reference Channel		1-2		SR.3.2 TDD	
		3-4		SR.3.3 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	
		3-4		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	
		3-4		CCR.3.7 TDD	
OCNG parameters		1-4		OP.1	
CP length		1-4		Normal	
PDSCH/PDCCH TCI state		1-4		TCI.State.0	
CSI-RS for tracking		1-4		TRS.2.1 TDD	
SSB Configuration		1-2		SSB.1 FR2	
		3-4		SSB.2 FR2	
SMTc Configuration		1-4		SMTc.3	
PRACH Configuration		1-4		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration		1-4		DRX.3	A.3.3.3
SSB index assigned as BFD RS (q ₀)		1-4		0	
SSB index assigned as CBD RS (q ₁)		1-4		1	
SSB index assigned as RLM RS		1-4		0,1	
Beam failure detection transmission parameters	DCI format	1-4		1-0	
	Number of Control OFDM symbols	1-4		2	
	Aggregation level	1-4	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-4	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-4	dB	0	
	DMRS precoder granularity	1-4		REG bundle size	
	REG bundle size	1-4		6	
Gap pattern ID		1-4		N/A	
rlmInSyncOutOfSyncThreshold		1-4		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1-2	dBm/SCS	-95	Threshold used for Q _{in_LR_SSB}
		3-4		-92	

powerControlOffsetSS	1-4		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1-4		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1-4		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1-4		CSI-RS.3.1 TDD	
reportConfigType	1-4		periodic	
reportQuantity	1-4		cri-RI-PMI-CQI	
CSI reporting periodicity	1-4	slot	40	
CSI reporting offset	1-4	slot	4	
T310	1-4	ms	1000	
N310	1-4		2	
T1	1-4	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-4	s	3.37	
T3	1-4	s	2.8	
T4	1-4	s	0	
T5	1-4	s	0.61	
D1	1-4	s	0.57	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.5.5.2.1-3: Cell specific test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q ₀	Config 1-4	dB	5 ^{Note 11}	-3 ^{Note 11}	-12	-12	-12
SNR_SSB of set q ₁	Config 1-4	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of set q ₁	Config 1-2	dBm/	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 3-4	SCS	-101.5	-101.5	-81.5	-81.5	-81.5
N _{oc}	Config 1-4	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.2.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.5.5.2.1-4: Void

Table A.5.5.2.1-5: Void

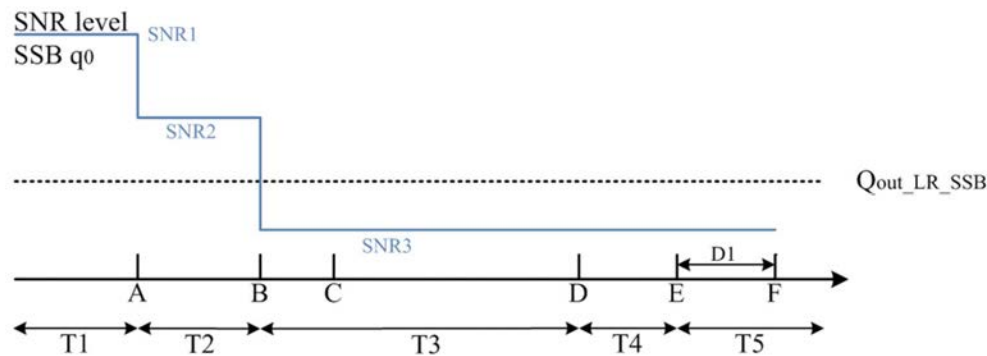


Figure A.5.5.2.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in DRX mode

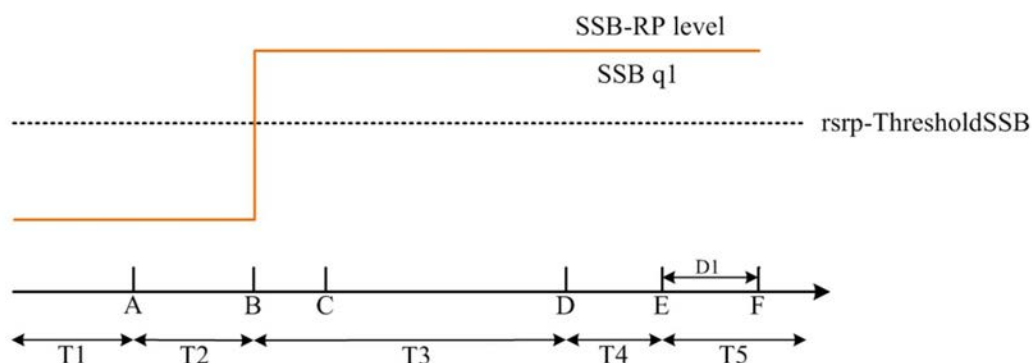


Figure A.5.5.5.2.1-2: SSB_RP level variation for SSB-based beam failure detection and link recovery testing in DRX mode

A.5.5.5.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 560 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.3 EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.5.5.5.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.3.1-1, A.5.5.5.3.1-2, and A.5.5.5.3.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.3.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the CSI-RS in set q_0 in the active PSCell to emulate CSI-RS based beam failure. Figure A.5.5.5.3.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.5.5.3.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	LTE TDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.5.5.3.1-2: General test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Test Config	Unit	Value	Comment
			Test 1	
Active E-UTRA PCell	1-2		Cell 1	
E-UTRA RF Channel Number	1-2		1	
Active PCell	1-2		Cell 2	
RF Channel Number	1-2		2	
Duplex mode	1-2		TDD	
TDD Configuration	1-2		TDDConf.3.1	
BW _{channel}	1-2		100: N _{RB,C} = 66	
Data RBs allocated	1-2		66	
PDSCH/PDCCH subcarrier spacing	1-2	kHz	120	
DL initial BWP configuration	1-2		DLBWP.0.1	
DL dedicated BWP configuration	1-2		DLBWP.1.1	
UL initial BWP configuration	1-2		ULBWP.0.1	
UL dedicated BWP configuration	1-2		ULBWP.1.1	
PDSCH Reference Channel	1-2		SR.3.2 TDD	
RMSI CORESET Reference Channel	1-2		CR.3.1 TDD	
Dedicated CORESET Reference Channel	1-2		CCR.3.1 TDD	
OCNG parameters	1-2		OP.1	
CP length	1-2		Normal	
PDSCH/PDCCH TCI state	1-2		TCI.State.0	
CSI-RS for tracking	1-2		TRS.2.1 TDD	
SSB Configuration	1-2		SSB.1 FR2	
SMTC Configuration	1-2		SMTC.3	
PRACH Configuration	1-2		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration	1-2		OFF	
CSI-RS configuration for BFD/CBD/RLM	1-2		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q ₀)	1-2		0	
CSI-RS index assigned as CBD RS (q ₁)	1-2		1	
CSI-RS index assigned as RLM RS	1-2		0,1	
Beam failure detection transmission parameters	DCI format	1-2	1-0	
	Number of Control OFDM symbols	1-2	2	
	Aggregation level	1-2	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0
	DMRS precoder granularity	1-2		REG bundle size
	REG bundle size	1-2		6
Gap pattern ID	1-2		N/A	

rlmInSyncOutOfSyncThreshold	1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1-2	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS	1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1-2		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType	1-2		periodic	
reportQuantity	1-2		cri-RI-PMI-CQI	
CSI reporting periodicity	1-2	slot	40	
CSI reporting offset	1-2	slot	4	
T310	1-2	ms	1000	
N310	1-2		2	
T1	1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-2	s	1.17	
T3	1-2	s	0.9	
T4	1-2	s	0	
T5	1-2	s	0.31	
D1	1-2	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.5.5.3.1-3: Cell specific test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR CSI-RS of set q_0	Config 1-2	dB	5 ^{Note 11}	-3 ^{Note 11}	-12	-12	-12
SNR CSI-RS of set q_1	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1-2	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1-2	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.3.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.5.5.3.1-4: Void

Table A.5.5.3.1-5: Void

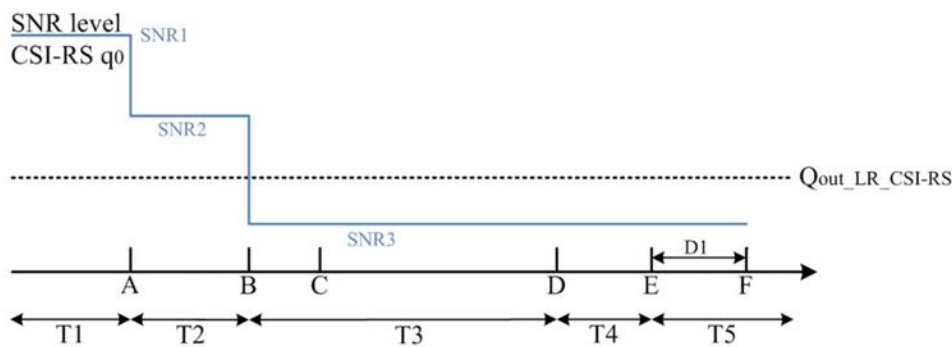


Figure A.5.5.3.1-1: SNR variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

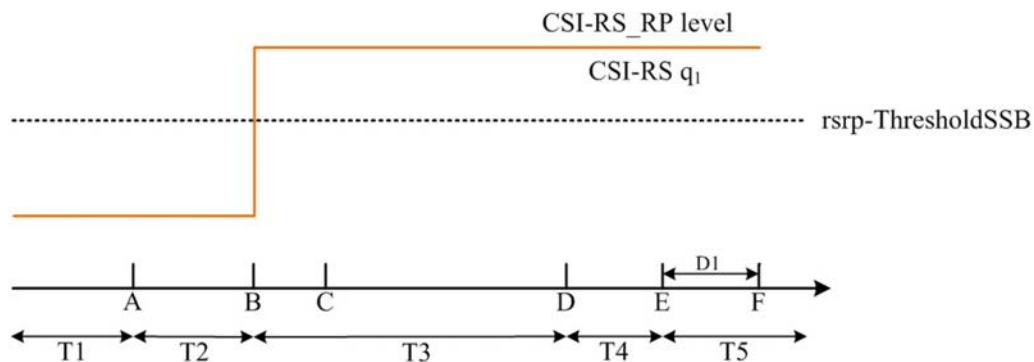


Figure A.5.5.3.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

A.5.5.5.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.4 EN-DC Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with CSI-RS-based BFD and LR in DRX mode

A.5.5.5.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UE's active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.4.1-1, A.5.5.5.4.1-2, A.5.5.5.4.1-3, and A.5.5.5.4.1-4 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.4.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the CSI-RS in set q_0 in the active PSCell to emulate CSI-RS based beam failure. Figure A.5.5.4.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to

decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.5.5.5.4.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	LTE TDD, FDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.5.5.5.4.1-2: General test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Test Config	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-2		Cell 1	
E-UTRA RF Channel Number		1-2		1	
Active PCell		1-2		Cell 2	
RF Channel Number		1-2		2	
Duplex mode		1-2		TDD	
TDD Configuration		1-2		TDDConf.3.1	
BW_{channel}		1-2		100: $N_{RB,c} = 66$	
Data RBs allocated		1-2		66	
PDSCH/PDCCH subcarrier spacing		1-2	kHz	120	
DL initial BWP configuration		1-2		DLBWP.0.1	
DL dedicated BWP configuration		1-2		DLBWP.1.1	
UL initial BWP configuration		1-2		ULBWP.0.1	
UL dedicated BWP configuration		1-2		ULBWP.1.1	
PDSCH Reference Channel		1-2		SR.3.2 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	
OCNG parameters		1-2		OP.1	
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	
CSI-RS for tracking		1-2		TRS.2.1 TDD	
SSB Configuration		1-2		SSB.1 FR2	
SMTc Configuration		1-2		SMTc.3	
PRACH Configuration		1-2		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration		1-2		DRX.3	A.3.3.3
CSI-RS configuration for BFD/CBD/RLM		1-2		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)		1-2		0	
CSI-RS index assigned as CBD RS (q_1)		1-2		1	
CSI-RS index assigned as RLM RS		1-2		0,1	
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	

REG bundle size	1-2		6	
Gap pattern ID	1-2		N/A	
rlmInSyncOutOfSyncThreshold	1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1-2	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS	1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1-2		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType	1-2		periodic	
reportQuantity	1-2		cri-RI-PMI-CQI	
CSI reporting periodicity	1-2	slot	40	
CSI reporting offset	1-2	slot	4	
T310	1-2	ms	1000	
N310	1-2		2	
T1	1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-2	s	5.43	
T3	1-2	s	5.16	
T4	1-2	s	0	
T5	1-2	s	0.31	
D1	1-2	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.5.5.4.1-3: Cell specific test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.155				
Assumption for UE beams ^{Note 10}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1-2	dB	5 ^{Note 11}	-3 ^{Note 11}	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1-2	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1-2	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.4.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.5.5.4.1-4: Void

Table A.5.5.4.1-5: Void

Table A.5.5.4.1-6: Void

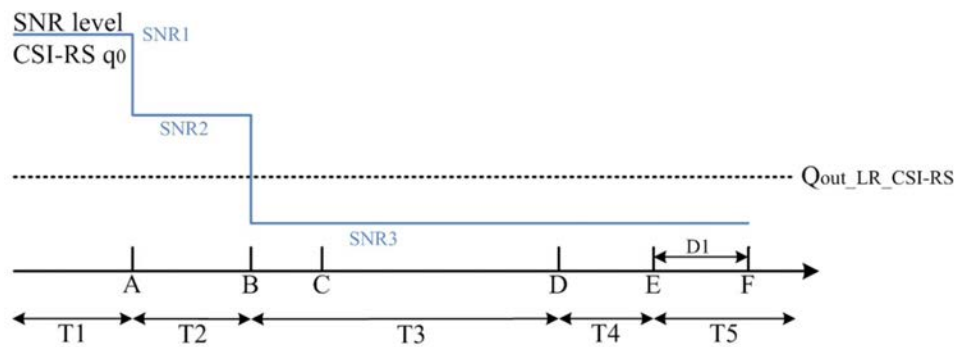


Figure A.5.5.4.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

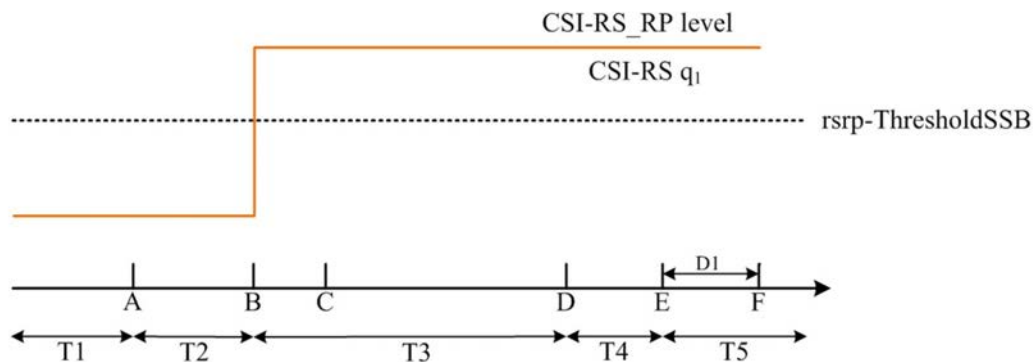


Figure A.5.5.4.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing in DRX mode

A.5.5.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.5 EN-DC scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PSCell configured with SSB-based BFD and LR in non-DRX mode

A.5.5.5.5.1 Test Purpose and Environment

The purpose is to test scheduling availability restrictions when the UE is performing beam failure detection or when the UE is performing L1-RSRP measurement for candidate beam detection, when no DRX is used. This test will verify the scheduling availability restriction requirements for SSB based beam failure detection and link recovery for an FR2 serving cell in clause 8.5.7 and 8.5.8.

The test parameters are given in Tables A.5.5.5.5.1-1, A.5.5.5.5.1-2 and A.5.5.5.5.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB index 0 in the active PSCell to emulate SSB based beam failure. Figure A.5.5.5.1-2 shows the variation of the downlink L1-RSRP of the SSB index 1 used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. This test will focus on the scheduling availability during beam failure detection and candidate beam detection. In the test, DRX configuration is not enabled. Test is to test

the scheduling availability restriction of UE performing beam failure detection and candidate beam detection when SSB RS configured for Beam failure detection and candidate beam detection. During the test the UE is scheduled to transmit continuously in UL.

Table A.5.5.5.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.5.1-2: General test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Test Config	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-4		Cell 1	
E-UTRA RF Channel Number		1-4		1	
Active PCell		1-4		Cell 2	
RF Channel Number		1-4		2	
Duplex mode		1-4		TDD	
TDD Configuration		1-4		TDDConf.3.1	
BW _{channel}		1-4		100: N _{RB,c} = 66	
Data RBs allocated		1-4		66	
PDSCH/PDCCH subcarrier spacing		1-4	kHz	120	
DL initial BWP configuration		1-4		DLBWP.0.1	
DL dedicated BWP configuration		1-4		DLBWP.1.1	
UL initial BWP configuration		1-4		ULBWP.0.1	
UL dedicated BWP configuration		1-4		ULBWP.1.1	
PDSCH Reference Channel		1-2		SR.3.2 TDD	
		3-4		SR.3.3 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	
		3-4		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	
		3-4		CCR.3.7 TDD	
OCNG parameters		1-4		OP.1	
CP length		1-4		Normal	
PDSCH/PDCCH TCI state		1-4		TCI.State.0	
CSI-RS for tracking		1-4		TRS.2.1 TDD	
SSB Configuration		1-2		SSB.1 FR2	
		3-4		SSB.2 FR2	
SMTc Configuration		1-4		SMTc.1	
PRACH Configuration		1-4		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration		1-4		OFF	
Beam failure detection transmission parameters	DCI format	1-4		1-0	
	Number of Control OFDM symbols	1-4		2	
	Aggregation level	1-4	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-4	dB	0	
	Ratio of hypothetical PDCCH DMRS energy	1-4	dB	0	

	to average SSS RE energy				
	DMRS precoder granularity	1-4		REG bundle size	
	REG bundle size	1-4		6	
Gap pattern ID		1-4		N/A	No measurement gap is configured
rlmInSyncOutOfSyncThreshold		1-4		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1-2	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
		3-4		-92	
powerControlOffsetSS		1-4		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-4		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1-4		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1-4		CSI-RS.3.1 TDD	
reportConfigType		1-4		periodic	
reportQuantity		1-4		cri-RI-PMI-CQI	
CSI reporting periodicity		1-4	slot	40	
CSI reporting offset		1-4	slot	4	
T310		1-4	ms	1000	
N310		1-4		2	
T1		1-4	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-4	s	2.6	
T3		1-4	s	1.64	
T4		1-4	s	0	
T5		1-4	s	1.01	
D1		1-4	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.					
Note 2: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.5.5.5.1-3: Cell specific test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SSB index assigned as BFD RS (q_0)	Config 1-4		0	0	Note 12		
SSB index assigned as CBD RS (q_1)	Config 1-4		1	1	1	1	1

SNR of SSB index 0	Config 1-4	dB	5 ^{Note 11}	-3 ^{Note 11}	-12	-12	-12
SNR of SSB index 1	Config 1-4	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of SSB index 1	Config 1-2	dBm/	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 3-4	SCS	-101.5	-101.5	-81.5	-81.5	-81.5
N_{oc}	Config 1-4	dBm/120 kHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Void						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.5.1-1.						
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.						
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband						
Note 12:	BFD RS (q_0) is configured as SSB index 0 at the start of T3, and it is reconfigured by RRC as SSB index 1 after the UE transmits the preamble on a beam associated with the candidate beam set q_1 .						

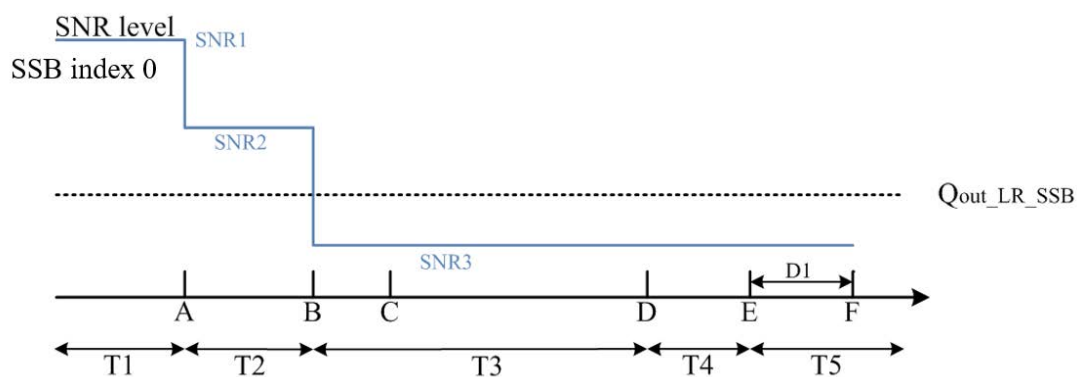


Figure A.5.5.5.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

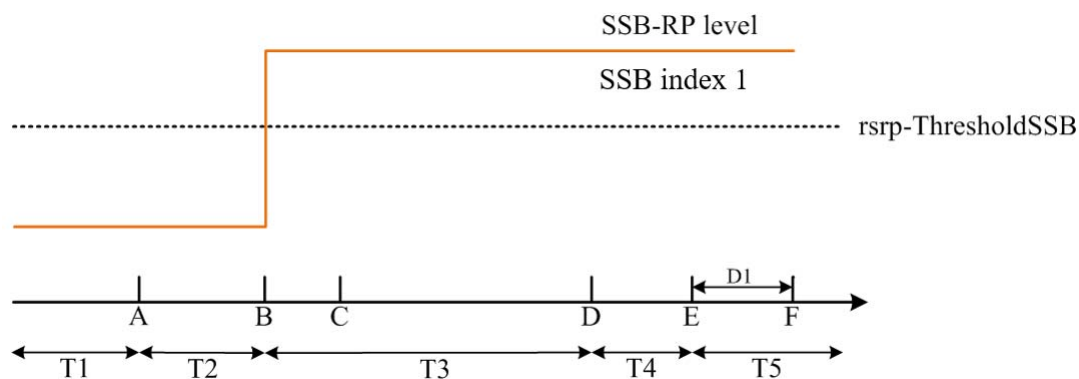


Figure A.5.5.5.1-2: SSB_RP level variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.5.5.5.2 Test Requirements

The UE behaviour during time duration T3 follows the requirements defined in clause 8.5.7.3:

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on BFD-RS symbols to be measured for beam failure detection.

The UE behaviour during time durations T4 and T5 follows the requirements defined in clause 8.5.8.3:

- The UE is not expected to transmit PUCCH/PUSCH or receive PDCCH/PDSCH on reference symbols to be measured for candidate beam detection.

A.5.5.5.6 EN-DC Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.5.5.5.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for an active SCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell with *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 SCell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.6.1-1, A.5.5.5.6.1-2 and A.5.5.5.6.1-3. There are three cells, cell 1 is the E-UTRAN PCell, cell 2 is the PSCell, and cell 3 is the SCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.6.1-1 shows the variation of the downlink SNR of the active SCell and the SNR of the CSI-RS in set q_0 in the active SCell to emulate CSI-RS based beam failure. Figure A.5.5.5.6.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1, cell 2, and cell 3. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.5.5.5.6.1-1: Supported test configurations for FR2 PSCell and SCell

Configuration	Description
1	LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

2	LTE TDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
---	--

Table A.5.5.6.1-2: General test parameters for FR2 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Test Config	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-2		Cell 1	
E-UTRA RF Channel Number		1-2		1	
Active PCell		1-2		Cell 2	
RF Channel Number for PCell		1-2		2	
Active SCell		1-2		Cell 3	
RF Channel Number for SCell		1-2		3	
Duplex mode		1-2		TDD	
TDD Configuration		1-2		TDDConf.3.1	
BW _{channel}		1-2	MHz	100: N _{RB,c} = 66	
Data RBs allocated		1-2		66	
PDSCH/PDCCH subcarrier spacing		1-2	kHz	120	
DL initial BWP configuration		1-2		DLBWP.0.1	
DL dedicated BWP configuration		1-2		DLBWP.1.1	
UL initial BWP configuration		1-2		ULBWP.0.1	
UL dedicated BWP configuration		1-2		ULBWP.1.1	
PDSCH Reference Channel		1-2		SR.3.2 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	A.3.1.2
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	
OCNG parameters		1-2		OP.1	A.3.2.1
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	
CSI-RS for tracking		1-2		TRS.2.1 TDD	
SSB Configuration		1-2		SSB.3 FR2	A.3.10
SMTC Configuration		1-2		SMTC.3	A.3.11
PRACH Configuration		1-2		FR2 PRACH configuration 4	Table A.3.8.3.4-1
DRX configuration		1-2		OFF	
CSI-RS configuration for BFD/CBD in activated SCell		1-2		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q ₀) in activated SCell		1-2		0	
CSI-RS index assigned as CBD RS (q ₁) in activated SCell		1-2		1	
CSI-RS configuration for RLM in PCell		1-2		CSI-RS.3.2 TDD	A.3.14.2
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	

schedulingRequestID-BFR-SCell-r16	1-2		Configured	
Periodicity of PUCCH for SR configuration for BFR on SCell	1-2	slot	40	5ms
Offset of PUCCH for SR configuration for BFR on SCell	1-2	slot	4	
PUCCH parameters for SR configuration for BFR on SCell	1-2		Table 8.3.3.1.2-1 in [13]	
rlmInSyncOutOfSyncThreshold	1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1-2	dBm/SCS	-95	Threshold used for $Q_{in LR SSB}$
powerControlOffsetSS	1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1-2		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType	1-2		periodic	
reportQuantity	1-2		cri-RI-PMI-CQI	
CSI reporting periodicity	1-2	slot	40	
CSI reporting offset	1-2	slot	4	
T310	1-2	ms	1000	
N310	1-2		2	
T1	1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-2	s	1.17	
T3	1-2	s	0.9	
T4	1-2	s	0	
T5	1-2	s	0.31	
D1	1-2	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.5.5.6.1-3: Cell specific test parameters for FR2 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Cell2 T1 to T5	Cell3 Test 1				
			T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.15	Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}		Rough	Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB						
EPRE ratio of PBCH DMRS to SSS	dB						
EPRE ratio of PBCH to PBCH DMRS	dB						
EPRE ratio of PSS to SSS	dB						
EPRE ratio of PDSCH DMRS to SSS	dB						

EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1,2	dB	5	5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1,2	dB	0.2	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1,2	dBm/S CS kHz	-104.5	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1,2	Config 1	dBm/120 kHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz	TDL-A 30ns 75Hz				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4:	Void							
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.							
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.6.1-1.							
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.							
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation							

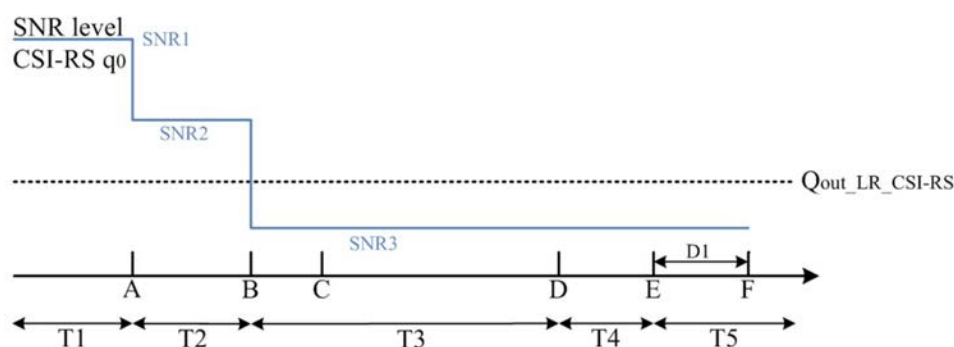


Figure A.5.5.6.1-1: SNR variation for CSI-RS based beam failure detection and link recovery testing for SCell in non-DRX mode

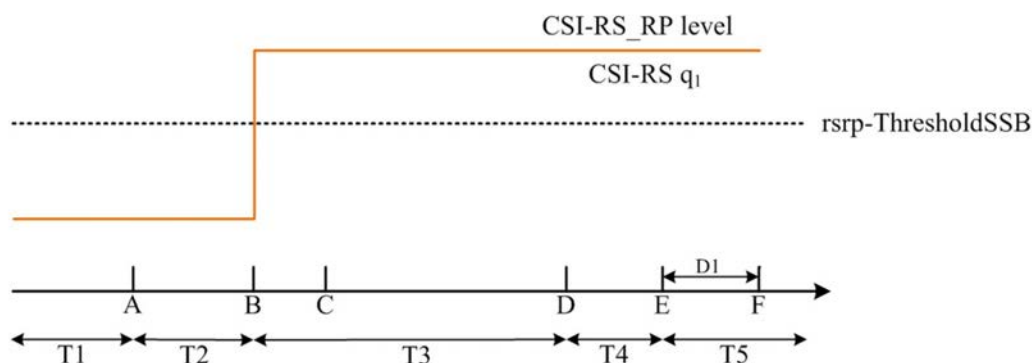


Figure A.5.5.6.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing for SCell in non-DRX mode

A.5.5.6.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 in A.5.5.6.1 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 2.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 2 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure and initial link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260 + 10$ ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_1 . The UE shall not transmit PUCCH with an LRR with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.7 EN-DC Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in DRX mode

A.5.5.5.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for an active SCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell with *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 SCell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.7.1-1, A.5.5.5.7.1-2 and A.5.5.5.7.1-3. There are three cells, cell 1 is the E-UTRAN PCell, cell 2 is the PSCell, and cell 3 is the SCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.7.1-1 shows the variation of the downlink SNR of the active SCell and the SNR of the CSI-RS in set q_0 in the active SCell to emulate CSI-RS based beam failure. Figure A.5.5.5.7.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1, cell 2, and cell 3. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5

ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.5.5.5.7.1-1: Supported test configurations for FR2 PSCell and SCell

Configuration	Description
1	LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	LTE TDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.5.5.5.7.1-2: General test parameters for FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter		Test Config	Unit	Value	Comment
				Test 1	
Active E-UTRA PCell		1-2		Cell 1	
E-UTRA RF Channel Number		1-2		1	
Active PCell		1-2		Cell 2	
RF Channel Number for PSCell		1-2		2	
Active SCell		1-2		Cell 3	
RF Channel Number for SCell		1-2		3	
Duplex mode		1-2		TDD	
TDD Configuration		1-2		TDDConf.3.1	
BW _{channel}		1-2	MHz	100: N _{RB,C} = 66	
Data RBs allocated		1-2		66	
PDSCH/PDCCH subcarrier spacing		1-2	kHz	120	
DL initial BWP configuration		1-2		DLBWP.0.1	
DL dedicated BWP configuration		1-2		DLBWP.1.1	
UL initial BWP configuration		1-2		ULBWP.0.1	
UL dedicated BWP configuration		1-2		ULBWP.1.1	
PDSCH Reference Channel		1-2		SR.3.2 TDD	
RMSI CORESET Reference Channel		1-2		CR.3.1 TDD	A.3.1.2
Dedicated CORESET Reference Channel		1-2		CCR.3.1 TDD	
OCNG parameters		1-2		OP.1	A.3.2.1
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	
CSI-RS for tracking		1-2		TRS.2.1 TDD	
SSB Configuration		1-2		SSB.3 FR2	A.3.10
SMTc Configuration		1-2		SMTc.3	A.3.11
PRACH Configuration		1-2		FR2 PRACH configuration 4	Table A.3.8.3.4-1
DRX configuration		1-2		DRX.3	A.3.3.3
CSI-RS configuration for BFD/CBD in activated SCell		1-2		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q ₀) in activated SCell		1-2		0	
CSI-RS index assigned as CBD RS (q ₁) in activated SCell		1-2		1	
CSI-RS configuration for RLM in PSCell		1-2		CSI-RS.3.2 TDD	A.3.14.2
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	

	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
schedulingRequestID-BFR-SCell-r16		1-2		Configured	
Periodicity of PUCCH for SR configuration for BFR on SCell		1-2	slot	40	5ms
Offset of PUCCH for SR configuration for BFR on SCell		1-2	slot	4	
PUCCH parameters for SR configuration for BFR on SCell		1-2		Table 8.3.3.1.2-1 in [13]	
rminSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1-2	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	
T1		1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-2	s	5.43	
T3		1-2	s	5.16	
T4		1-2	s	0	
T5		1-2	s	0.31	
D1		1-2	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.5.5.7.1-3: Cell specific test parameters for FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Cell2	Cell3				
			Test 1				
			T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.155	Setup 1 defined in A.3.155				
Assumption for UE beams ^{Note 10}		Rough	Rough				
EPRE ratio of PDCCH DMRS to SSS	dB						

EPRE ratio of PDCCH to PDCCH DMRS		dB	0	0					
EPRE ratio of PBCH DMRS to SSS		dB							
EPRE ratio of PBCH to PBCH DMRS		dB							
EPRE ratio of PSS to SSS		dB							
EPRE ratio of PDSCH DMRS to SSS		dB							
EPRE ratio of PDSCH to PDSCH DMRS		dB							
EPRE ratio of OCNG DMRS to SSS		dB							
EPRE ratio of OCNG to OCNG DMRS		dB							
SNR_CSI-RS of set q_0	Config 1,2	dB	5	5	-3	-12	-12	-12	
SNR_CSI-RS of set q_1	Config 1,2	dB	0.2	0.2	0.2	20.2	20.2	20.2	
CSI-RS_RP of set q_1	Config 1,2	dBm/ SCS kHz	-104.5	- 104. 5	-104.5	-84.5	-84.5	-84.5	
N_{oc}	Config 1,2	dBm/12 0 kHz	-104.7	-104.7					
Propagation condition			TDL-A 30ns 75Hz	TDL-A 30ns 75Hz					
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.									
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.									
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.									
Note 4: Void									
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.									
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.									
Note 7: SNR levels correspond to the signal to noise ratio over the SSS RES.									
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.7.1-1.									
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.									
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation									

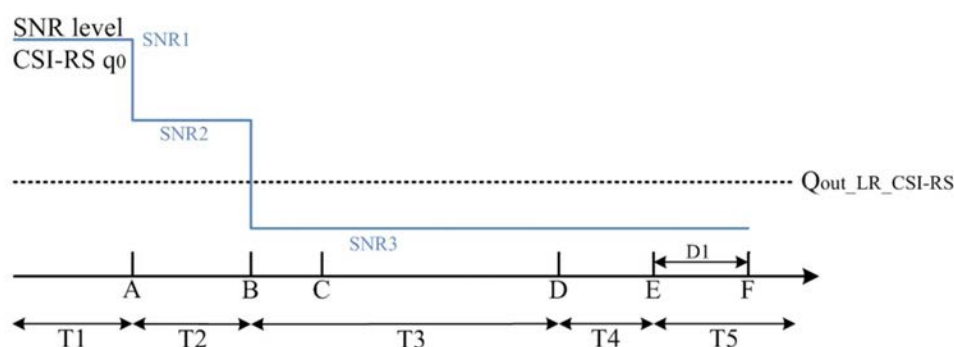


Figure A.5.5.7.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing for SCell in DRX mode

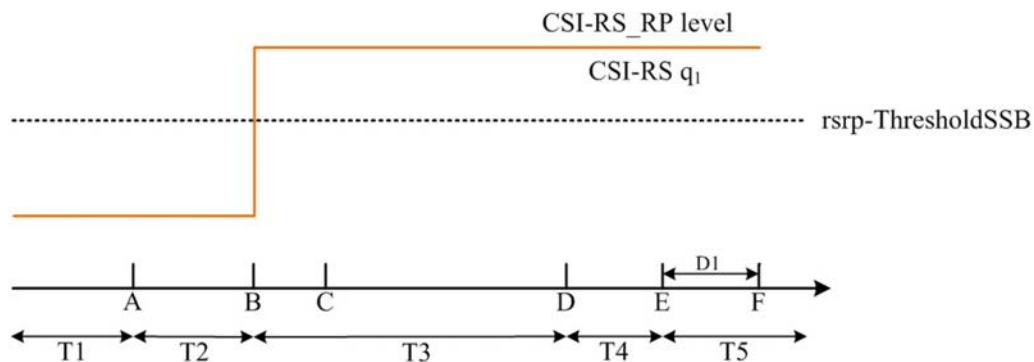


Figure A.5.5.5.7.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing for SCell in DRX mode

A.5.5.5.7.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 in A.5.5.5.7.1 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 2.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 2.

During T3 the UE shall detect beam failure and initial link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260 + 10$ ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_1 . The UE shall not transmit PUCCH with an LRR with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.8 EN-DC TRP specific Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with CSI-RS-based BFD and LR in DRX mode

A.5.5.5.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the TRP specific CSI-RS-based beam failure in the set $(q_0,0)$, $(q_0,1)$ configured for a serving PSCell and a cell with PCID different from the serving cell, and that the UE performs correct CSI-RS-based link recovery based on beam candidate set $(q_1,0)$ and $(q_1,1)$. The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell with *schedulingRequestID-BFR-r17* configured, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.5.5.5.8.1-1, A.5.5.5.8.1-2, A.5.5.5.8.1-3, and A.5.5.5.8.1-4 below. There are three cells, cell 1 is the E-UTRAN PCell, cell 2 is the PSCell and cell 3 is the cell with different PCID in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.5.8.1-1 shows the variation of the downlink SNR of the PSCell and the SNR of the CSI-RS in set q_0 in the

active PSCell to emulate CSI-RS based beam failure. Figure A.5.5.8.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.5.5.8.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR 120 kHz SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SCS, 100 MHz bandwidth, TDD duplex mode

Table A.5.5.8.1-2: General test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active E-UTRA PCell	1-2		Cell 1	
E-UTRA RF Channel Number	1-2		1	
Active PSCell	1-2		Cell 2	
RF Channel Number	1-2		2	
Duplex mode	1-2		TDD	
TDD Configuration	1-2		TDDConf.3.1	
BW _{channel}	1-2		100: N _{RB,c} = 66	
Data RBs allocated	1-2		66	
PDSCH/PDCCH subcarrier spacing	1-2	kHz	120	
DL initial BWP configuration	1-2		DLBWP.0.1	
DL dedicated BWP configuration	1-2		DLBWP.1.1	
UL initial BWP configuration	1-2		ULBWP.0.1	
UL dedicated BWP configuration	1-2		ULBWP.1.1	
PDSCH Reference Channel	1-2		SR.3.2 TDD	
RMSI CORESET Reference Channel	1-2		CR.3.1 TDD	
Dedicated CORESET Reference Channel	1-2		CCR.3.1 TDD	
OCNG parameters	1-2		OP.1	
CP length	1-2		Normal	
PDSCH/PDCCH TCI state	1-2		TCI.State.0	
CSI-RS for tracking	1-2		TRS.2.1 TDD	
SSB Configuration	1-2		SSB.1 FR2	
SMTC Configuration	1-2		SMTC.3	
PRACH Configuration	1-2		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration	1-2		DRX.3	A.3.3.3
CSI-RS configuration for TRP0	1-2		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS configuration for TRP1	1-2		CSI-RS.3.6 TDD	A.3.14.2
CSI-RS index assigned as BFD RS ($q_{0,0}$)	1-2		CSI-RS#0	
CSI-RS index assigned as CBD RS ($q_{1,0}$)	1-2		CSI-RS#1	

CSI-RS index assigned as BFD RS ($q_{0,1}$)		1-2		CSI-RS#2	
CSI-RS index assigned as CBD RS ($q_{1,1}$)		1-2		CSI-RS#3	
CSI-RS index assigned as RLM RS		1-2		0,1,2,3	
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
schedulingRequestID-BFR- r17		1-2		Configured	
Periodicity of PUCCH for SR configuration for BFR on PSCell		1-2	slot	40	5ms
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdCSI-RS		1-2	dBm/SCS	-95	Threshold used for $Q_{in_LR_CSI-RS}$
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	
T1		1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-2	s	10.81	
T3		1-2	s	10.28	
T4		1-2	s	0	

T5	1-2	s	0.57	
D1	1-2	s	0.53	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.5.5.8.1-3: Cell specific test parameters for FR2 PSCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 3 defined in A.3.15				
Assumption for UE beams ^{Note 10}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR CSI-RS of set $q_{0,0}$	Config 1-2	dB	5	-3	-12	-12	-12
SNR CSI-RS of set $q_{0,1}$	Config 1-2	dB	5	5	5	5	5
SNR CSI-RS of set $q_{1,0}$	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
SNR CSI-RS of set $q_{1,1}$	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set $q_{1,0}$	Config 1-2	dBm/S CS	-104.5	-104.5	-84.5	-84.5	-84.5
CSI-RS_RP of set $q_{1,1}$	Config 1-2	dBm/S CS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1-2	dBm/12 0 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Void						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS RES.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.5.5.4.1-1.						
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.						
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband						

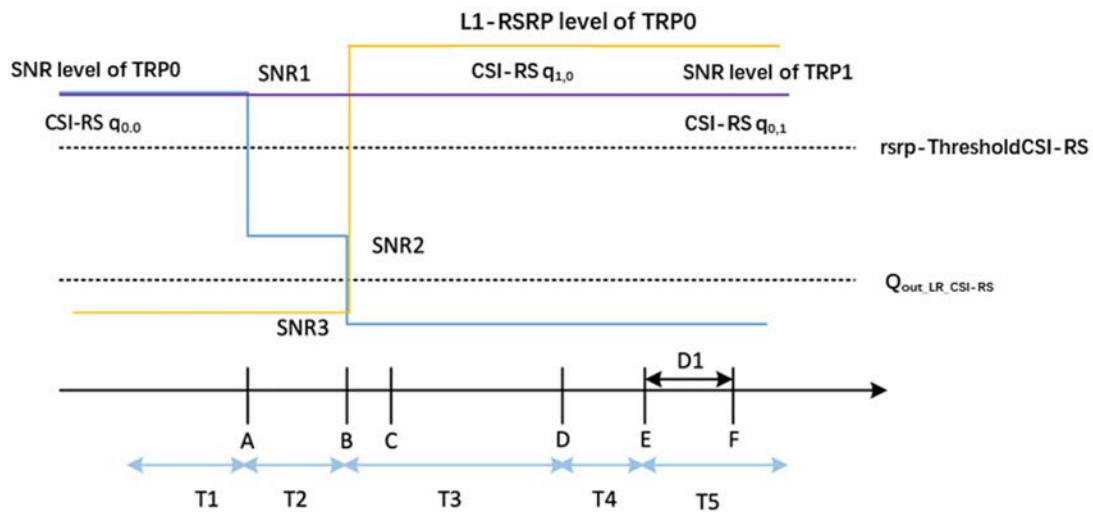


Figure A.5.5.8.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.5.5.5.8.2 Test Requirements

Test requirements are applied to TRP specific report respectively on $(q_{0,0})$, $(q_{0,1})$ for cell-2 and $(q_{1,0})$, $(q_{1,1})$ for cell-3 respectively as Figure A.5.5.8.1-1.

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260 + 10$ ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{1,0}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{1,0}$ earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.5.9 Beam Failure Detection and Link Recovery Test for FR2 PSCell configured with SSB-based BFD and LR in DRX mode for UE fulfilling relaxed measurement criterion

A.5.5.5.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UE's active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam

failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.2.4 for UE fulfilling good serving cell quality criterion, if configured. *goodServingCellEvaluationBFD* [2] criterion is configured according to the parameters listed in Table A.5.5.9.1-2.

The test parameters are given in Tables A.5.5.9.1-1, A.5.5.9.1-2 and A.5.5.9.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.5.5.9.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSBs in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.5.5.9.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.5.5.9.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	LTE TDD, TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
3	LTE FDD, TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
4	LTE TDD, TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.5.5.9.1-2: General test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter	Test Config	Unit	Value	Comment
			Test 1	
Active E-UTRA PCell	1-4		Cell 1	
E-UTRA RF Channel Number	1-4		1	
Active PCell	1-4		Cell 2	
RF Channel Number	1-4		2	
Duplex mode	1-4		TDD	
TDD Configuration	1-4		TDDConf.3.1	
BW _{channel}	1-4	MHz	100: N _{RB,c} = 66	
Data RBs allocated	1-4		66	
PDSCH/PDCCH subcarrier spacing	1-4	kHz	120	
DL initial BWP configuration	1-4		DLBWP.0.1	
DL dedicated BWP configuration	1-4		DLBWP.1.1	
UL initial BWP configuration	1-4		ULBWP.0.1	
UL dedicated BWP configuration	1-4		ULBWP.1.1	
PDSCH Reference Channel	1-2		SR.3.2 TDD	
	3-4		SR.3.3 TDD	
RMSI CORESET Reference Channel	1-2		CR.3.1 TDD	
	3-4		CR.3.2 TDD	
Dedicated CORESET Reference Channel	1-2		CCR.3.1 TDD	
	3-4		CCR.3.7 TDD	
OCNG parameters	1-4		OP.1	
CP length	1-4		Normal	
PDSCH/PDCCH TCI state	1-4		TCI.State.0	
CSI-RS for tracking	1-4		TRS.2.1 TDD	
SSB Configuration	1-2		SSB.1 FR2	
	3-4		SSB.2 FR2	
SMTC Configuration	1-4		SMTC.3	

PRACH Configuration		1-4		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration		1-4		DRX.3	A.3.3.3
SSB index assigned as BFD RS (q_0)		1-4		0,1	
SSB index assigned as CBD RS (q_1)		1-4		2	
SSB index assigned as RLM RS		1-4		0,2	
Beam failure detection transmission parameters	DCI format	1-4	1-0	1-0	
	Number of Control OFDM symbols	1-4		2	
	Aggregation level	1-4	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-4	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-4	dB	0	
	DMRS precoder granularity	1-4		REG bundle size	
	REG bundle size	1-4		6	
Gap pattern ID		1-4		N/A	
rlmInSyncOutOfSyncThreshold		1-4		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1-2	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
		3-4		-92	
powerControlOffsetSS		1-4		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-4		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1-4		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1-4		CSI-RS.3.1 TDD	
reportConfigType		1-4		periodic	
reportQuantity		1-4		cri-RI-PMI-CQI	
CSI reporting periodicity		1-4	slot	40	
CSI reporting offset		1-4	slot	4	
T310		1-4	ms	1000	
N310		1-4		1	
T1		1-4	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-4	s	[3.37]	
T3		1-4	s	[5.56]	
T4		1-4	s	0	
T5		1-4	s	0.61	
D1		1-4	s	0.57	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.5.5.9.1-3: Cell specific test parameters for FR2 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}		Rough				

EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB0 of set q ₀	Config 1-4	dB	6 ^{Note 11}	6 ^{Note 11}	-12	-12	-12
SNR_SSB1 of set q ₀	Config 1-4	dB	-12	-12	-12	-12	-12
SNR_SSB of set q ₁ SSB_RP of set q ₁	Config 1-4	dB	0.2	0.2	20.2	20.2	20.2
	Config 1-2	dBm/	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 3-4	SCS	-101.5	-101.5	-81.5	-81.5	-81.5
N _{oc}	Config 1-4	dBm/120 KHz	-104.7				
goodServingCellEvaluation		dB	4				
Propagation condition			TDL-A 30ns 75Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Void							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR for SSB0 in time periods T1, T2, T3, T4 and T5 is denoted as SNR0_1, SNR0_2 and SNR0_3 respectively in figure A.5.5.9.1-1. The SNR for SSB1 in time periods T1, T2, T3, T4 and T5 is denoted as SNR1_1, SNR1_2 and SNR1_3 respectively in figure A.5.5.9.1-1.							
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.							
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation							
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband							

parameters of NR PSCell is specified in Table A.5.5.6.1.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.6.1.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PSCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted i . The UE should switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after slot ($i + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after slot ($i + T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell(Cell 2).

During T3,

The time period T3 starts from the slot # j , where j is the beginning slot of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($j + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell at latest at the beginning of the DL slot right after slot ($j + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot ($j + T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time in PSCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

Table A.5.5.6.1.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: A UE which fulfils the requirements in test case A.5.5.2.2 can skip the test cases in A.5.5.2.1.	

Table A.5.5.6.1.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
<i>bwp-InactivityTimer</i>	ms	[200]	
PDCCH and PDSCH maximum number of HARQ transmission		1	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

Table A.5.5.6.1.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
<i>BW_{channel}</i>		100 MHz: $N_{RB,c} = 66$
Active BWP ID		1, 2
Initial DL BWP Configuration		DLBWP.0.2 ^{Note 2}
Active DL BWP-1 Configuration		DLBWP.1.1 ^{Note 2}
Active DL BWP-2 Configuration		DLBWP.1.3 ^{Note 2}
Initial UL BWP Configuration		ULBWP.0.2 ^{Note 2}
Active UL BWP-1 Configuration		ULBWP.1.1 ^{Note 2}
Active UL BWP-2 Configuration		ULBWP.1.3 ^{Note 2}
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State		TCI.State.0
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		

EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].		

Table A.5.5.6.1.1.1-4: OTA related test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1
Assumption for UE beams ^{Note 6}		Fine
N_{oc} ^{Note 1}	dBm/15 kHz	-112
N_{oc} ^{Note 1}	dBm/SCS	-103
SS-RSRP ^{Note 2}	dBm/120 kHz ^{Note 3}	-85
$\bar{E}_s/I_{ot}$	dB	18
I_o ^{Note 2}	dBm/95.04 MHz ^{Note 4}	-56
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone. Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation		

A.5.5.6.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell from the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK for PSCell from the first UL slot that occurs after the beginning of DL slot $(j + T_{BWPswitchDelay} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot $(i + Y1)$, $(j + Y2)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.5.5.6.1.2 E-UTRAN – NR PSCell FR2 with FR2 SCell DL active BWP switch in non-DRX in synchronous EN-DC

A.5.5.6.1.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6.2, and interruption requirements for NR victim cell defined in clause 8.2.1.2.7. Supported test configurations are shown in Table A.5.5.6.1.2.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.5.5.6.1.2.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and SCell are specified in Table A.5.5.6.1.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) and SCell (Cell 3) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 3 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 3 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PSCell, BWP-0 in Cell 2 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PSCell.
- UE is configured with a *bwp-InactivityTimer* timer value for SCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for SCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in SCell's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after slot ($i + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after slot ($i + T_{BWPswitchDelay}$).

PCell(Cell 1) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.

PSCell(Cell 2) interruption due to BWP switch on SCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell(Cell 2).

During T3,

The time period T3 starts from the slot # j , where j is the first slot of the subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after SCell's DL slot ($j + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PSCell at latest at the beginning of the DL slot right after slot ($j + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on SCell's BWP-1 starting from the beginning of the DL slot right after slot ($j + T_{BWPswitchDelay}$).

PCell(Cell 1) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

PSCell(Cell 2) interruption due to BWP switch of SCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to NR PSCell is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during BWP switch of SCell.

Table A.5.5.6.1.2.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: A UE which fulfils the requirements in test case A.5.5.6.1.2 can skip the test cases in A.5.5.6.1.1.	
Note 3: NR configuration is the same for PSCell and SCells.	

Table A.5.5.6.1.2.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3	Two NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	
<i>bwp-InactivityTimer</i>	ms	[200]	
PDCCH and PDSCH maximum number of HARQ transmission		1	For PCell, PSCell and SCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
Cell3 timing offset to cell2	μs	3	Synchronous cells
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.5.5.6.1.2.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Cell 2	Cell 3
Frequency Range		FR2	
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
BW _{channel}		100 MHz: N _{RB,c} = 66	
Active BWP ID		0	1,2
Initial DL BWP Configuration		DLBWP.0.2	DLBWP.0.2
Active DL BWP-0 Configuration		DLBWP.0.2	N.A.
Active DL BWP-1 Configuration		N.A.	DLBWP.1.3
Active DL BWP-2 Configuration		N.A.	DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2	N.A.
Active UL BWP-0 Configuration		ULBWP.0.2	N.A.
Active UL BWP-1 Configuration		N.A.	N.A.
Active UL BWP-2 Configuration		N.A.	N.A.
PDSCH Reference measurement channel		SR.3.1 TDD	
RMSI CORESET parameters		CR.3.1 TDD	
Dedicated CORESET parameters		CCR.3.1 TDD	
OCNG Patterns		OP.1	
SSB Configuration		SSB.1 FR2	
SMTTC Configuration		SMTTC.1	
TCI State		TRS.2.1 TDD	
TRS Configuration		TCI.State.0	
Antenna Configuration		1x2	
Propagation Condition		AWGN	
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3.			

Table A.5.5.6.1.2.1-4: OTA related test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15	
Assumption for UE beams ^{Note 6}		Fine	Fine
N_{oc} ^{Note 1}	dBm/15 kHz	-112	-112
SS-RSRP ^{Note 2}	dBm/120 kHz ^{Note 3}	-85	-85
$\hat{E}_s/I_{ot}$	dB	18	18
I_o ^{Note 2}	dBm/95.04 MHz ^{Note 4}	-56	-56

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone.
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.6.1.2.2 Test Requirements

During T1, the UE shall start to send the ACK for SCell from the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK for SCell from the first UL slot that occurs after the beginning of DL slot $(j + T_{BWPswitchDelay} + k1)$.

All of the above test requirements shall be fulfilled in order for the observed SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start of the interruption of PCell during PCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PCell during PCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in TS36.133 Clause 7.32.2.7.

During T1, the start of the interruption of PCell during SCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PCell during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in Clause 8.6.2.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after slot $(i + T_{BWPswitchDelay} + k1)$, $(j + T_{BWPswitchDelay} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.5.5.6.2 RRC-based Active BWP Switch

A.5.5.6.2.1 E-UTRAN – NR PSCell FR2 DL active BWP switch with non-DRX in synchronous EN-DC

A.5.5.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.3. Supported test configurations are shown in Table A.5.5.6.2.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1) and one PSCell (Cell 2) as given in Table A.5.5.6.2.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of PSCell are specified in Table A.5.5.6.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on E-UTRA PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2.

Before the test starts,

- UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 2 (PSCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PSCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

If the *RRCReconfiguration* is embedded in E-UTRA RRC message, time period T1 starts when a E-UTRA RRC message *RRCConnectionReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side from PCell in PSCell's slot # denoted *i*. Otherwise, i.e., if the *RRCReconfiguration* is not embedded in E-UTRA RRC message, time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in from PSCell in PSCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to completely receive PDSCH on PSCell from the first DL slot occurs right after the beginning of PSCell's DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ as defined in clause 8.6.3 and starts to report valid ACK/NACK for the PSCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k1$. The UE shall be continuously scheduled on PSCell's BWP-1 starting the first DL slot that occurs right after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$.

$T_{\text{RRCprocessingDelay}}$ and $T_{\text{BWPswitchDelayRRC}}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when a valid ACK/NACK is received.

Table A.5.5.6.2.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.6.2.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
PDCCH and PDSCH maximum number of HARQ transmission		1	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
T1	s	0.2	

Table A.5.5.6.2.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode			TDD
TDD configuration			TDDConf.3.1
BW _{channel}			100 MHz: N _{RB,c} = 66
Active BWP ID			1
Initial DL BWP Configuration			DLBWP.0.2
Initial UL BWP Configuration			ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration		DLBWP.1.3
	Active UL BWP-1 Configuration		ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration		DLBWP.1.1
	Active UL BWP-1 Configuration		ULBWP.1.1
PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			

EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].		

Table A.5.5.6.2.1.1-4: OTA related test parameters for BWP switching test case

Parameter		Unit	Cell 2
Angle of arrival configuration			Setup 1 according to table A.3.15
Assumption for UE beams ^{Note 5}			Fine
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/15kHz	-112
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/SCS	-103
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
SS-RSRP ^{Note2}	NR_TDD_FR2_A	dBm/SCS ^{Note3}	-85
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s/I_{ot}$		dB	18
I_o ^{Note2}	NR_TDD_FR2_A	dBm/95.04 MHz ^{Note4}	-56
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.6.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell from the first DL slot that occurs right after the beginning of DL slot $i + \frac{T_{\text{RRCP}} + T_{\text{BWP}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for the PSCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCP}} + T_{\text{BWP}}}{\text{NR Slot length}} + k1$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.6.3 Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs

A.5.5.6.3.1 E-UTRAN – NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs in synchronous EN-DC

A.5.5.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch on multiple CCs delay requirement defined in clause 8.6. Supported test configurations are shown in Table A.5.5.6.3.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.5.5.6.3.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and NR SCell is specified in Table A.5.5.6.3.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.6.3.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) and SCell (Cell 3) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and Cell 3 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell and SCell, BWP-1 and BWP-2, in Cell 2 and Cell 3 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell and SCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PSCell and SCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PSCell DL BWP switch and a DCI format 1_1 command for SCell DL BWP switch, sent from the test equipment to the UE simultaneously, are received at the UE side in PSCell and SCell slot # denoted i . The UE should switch its bandwidth part from BWP-1 to BWP-2 in PSCell and SCell.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i + T_{\text{MultipleBWPswitchDelay}}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after slot ($i + T_{\text{MultipleBWPswitchDelay}} + k1$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after slot ($i + T_{\text{MultipleBWPswitchDelay}}$).

The UE shall be able to receive PDSCH at the beginning of the DL slot right after SCell's DL slot ($i + T_{\text{BWPswitchDelay}}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after slot ($i + T_{\text{MultipleBWPswitchDelay}} + k1$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after slot ($i + T_{\text{MultipleBWPswitchDelay}}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell (Cell 2) and SCell (Cell 3).

During T3,

The time period T3 starts from the slot # j , where j is the beginning slot of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires in PSCell and SCell. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1 in both PSCell and SCell.

The UE shall be able to receive PDSCH on PSCell at the beginning of the DL slot right after PSCell's DL slot ($j + T_{\text{MultipleBWPswitchDelay}}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell at latest at the beginning of the DL slot right after slot ($j + T_{\text{MultipleBWPswitchDelay}} + k1$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot ($j + T_{\text{MultipleBWPswitchDelay}}$).

The UE shall be able to receive PDSCH on SCell at the beginning of the DL slot right after SCell's DL slot ($j + T_{\text{MultipleBWPswitchDelay}}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell at latest at the beginning of the DL slot right after slot ($j + T_{\text{MultipleBWPswitchDelay}} + k1$). The UE shall be continuously scheduled on SCell's BWP-1 starting from the beginning of the DL slot right after slot ($j + T_{\text{MultipleBWPswitchDelay}}$).

The test equipment verifies the DL BWP switch time in PSCell and SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

Table A.5.5.6.3.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.6.3.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
-----------	------	-------	---------

E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3	Two NR radio channel is used for this test for PSCell and SCell
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	For both PCell, PSCell and SCell
<i>bwp-InactivityTimer</i>	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
Cell3 timing offset to cell2	μs	0	Synchronous Cells
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.5.5.6.3.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Cell 2	Cell 3
Frequency Range		FR2	FR2
Duplex mode		TDD	TDD
TDD configuration		TDDConf.3.1	TDDConf.3.1
BW _{channel}		100 MHz: N _{RB,C} = 66	100 MHz: N _{RB,C} = 66
Active BWP ID		1, 2	1, 2
Initial DL BWP Configuration		DLBWP.0.2 ^{Note 2}	DLBWP.0.2 ^{Note 2}
Active DL BWP-1 Configuration		DLBWP.1.1 ^{Note 2}	DLBWP.1.1 ^{Note 2}
Active DL BWP-2 Configuration		DLBWP.1.3 ^{Note 2}	DLBWP.1.3 ^{Note 2}
Initial UL BWP Configuration		ULBWP.0.2 ^{Note 2}	ULBWP.0.2 ^{Note 2}
Active UL BWP-1 Configuration		ULBWP.1.1 ^{Note 2}	ULBWP.1.1 ^{Note 2}
Active UL BWP-2 Configuration		ULBWP.1.3 ^{Note 2}	ULBWP.1.3 ^{Note 2}
PDSCH Reference measurement channel		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD	CCR.3.1 TDD
OCNG Patterns		OP.1	OP.1
SSB Configuration		SSB.1 FR2	SSB.1 FR2
SMTC Configuration		SMTC.1	SMTC.1
TCI State		TCI.State.0	TCI.State.0
TRS Configuration		TRS.2.1 TDD	TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			

EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation Condition		AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

Table A.5.5.6.3.1.1-4: OTA related test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	Setup 1 according to clause A.3.15.1
Assumption for UE beams ^{Note 6}		Fine	Fine
N_{oc} ^{Note 1}	dBm/15 kHz	-112	-112
N_{oc} ^{Note 1}	dBm/SCS	-103	-103
SS-RSRP ^{Note 2}	dBm/120 kHz ^{Note 3}	-85	-85
$\bar{E}_s/I_{ot}$	dB	18	18
I_o ^{Note 2}	dBm/95.04 MHz ^{Note 4}	-56	-56
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone			
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone.			
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			

A.5.5.6.3.1.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell and SCell from the first UL slot that occurs after the beginning of DL slot $(i + T_{MultipleBWPs\ switch\ Delay} + k1)$.

During T3, the UE shall start to send the ACK for PSCell and SCell from the first UL slot that occurs after the beginning of DL slot $(j + T_{MultipleBWPs\ switch\ Delay} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* and *bwp-SwitchingMultiCCs-r16* [2], UE shall finish BWP switch within the time duration $T_{MultipleBWPs\ switch\ Delay}$ defined in TS 38.133 clause 8.6.2A and 8.6.2B

All of the above test requirements shall be fulfilled in order for the observed PSCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot $(i + Y1)$, $(j + Y2)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.5.5.6.4 SCell dormancy switch

A.5.5.6.4.1 E-UTRAN – NR FR2 PSCell SCell dormancy switch of single FR2 SCell inside active time

A.5.5.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify

1) the interruption due to RRM and CSI measurement during SCell dormancy on spCell is within the limits 1) the interruption due to RRM and CSI measurement during SCell dormancy on spCell is within the limits specified in clause 8.2.1.2.15.2 and 8.2.1.2.15.3 for NR victim cell, and

2) the SCell dormancy switch delay is within the requirement defined in clause 8.6.2, and the SCell dormancy switch interruption is within the limits defined in clause 8.2.1.2.15.1 for NR victim cell.

Supported test configurations are shown in Table A.5.5.6.4.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.5.5.6.4.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and SCell are specified in Table A.5.5.6.4.1.1-3 below.

The tests consist of three consecutive time periods T1, T2, and T3, respectively. All cells have constant signal levels throughout the test. The UE is continuously scheduled in PCell and PSCell throughout the test

Before the test starts,

- UE is connected to Cell 1 (PCell), Cell 2 (PSCell) and Cell 3 (SCell).
- UE is configured with a single UE-specific downlink bandwidth part, BWP-0, for Cell 2. BWP-0 includes the bandwidth of the initial DL BWP and SSB.
- UE is configured with one non-dormant and one dormant UE-specific downlink bandwidth part, BWP-0 and BWP-1, respectively, for Cell 3. BWP-0 includes the bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP in Cell 3 is BWP-0.
- UE is indicated that *firstOutsideActiveTimeBWP-Id* that the active DL BWP after when switching from dormant BWP in Cell 3 is BWP-0

T1 starts at the point in time at which the UE receives a DCI with dormancy indication on PDCCH in PSCell at the antenna connector, in a slot # denoted m , pertaining to dormancy indication for switching SCell from non-dormancy to dormancy. The UE shall complete switching of the SCells to dormancy by the end of slot $m + \text{ceil}(T_{\text{BWPswitchDelay}}/\text{NR slot length}) + 1$ in Test1, and slot $m + \text{ceil}(T_{\text{BWPswitchDelay}}/\text{NR slot length}) + 2$ in Test2, as specified in clause 8.6.2. Any PSCell interruptions due to the switching between non-dormant and dormant BWPs shall fulfill requirements in clause 8.2.1.2.15.1 for NR victim cell. The test equipment verifies that interruptions due to switching from non-dormancy to dormancy are within the requirements by analysing HARQ feedback transmitted in PSCell for PSCell.

During T2, the UE is carrying out CSI and RRM measurements on dormant SCell. Any interruptions due to CSI and RRM measurements shall fulfill requirements in clause 8.2.1.2.15.2 and 8.2.1.2.15.3 for NR victim cell. The test equipment verifies that the interruptions are within the allowed percentages by counting ACK/NACKs in PSCell. At the end of T2, the test equipment transmits a DCI with dormancy indication on PDCCH in PSCell carrying a dormancy indication for switching SCell from dormancy to non-dormancy.

T3 starts at the point in time at which the UE receives a DCI with dormancy indication on PDCCH in PSCell at the antenna connector, in a slot # denoted n , pertaining to dormancy indication for switching SCell from dormancy to

non-dormancy. The UE shall complete switching of the SCell to non-dormancy by the end of slot $n + \text{ceil}(T_{\text{BWPswitchDelay}}/\text{NR slot length}) + 1$ in Test1, and slot $n + \text{ceil}(T_{\text{BWPswitchDelay}}/\text{NR slot length}) + 2$ in Test2, as specified in clause 8.6.2. Any PSCell interruptions due to the switching between non-dormant and dormant BWPs shall fulfill requirements in clause 8.2.1.2.15.1 for NR victim cell. The test equipment verifies that interruptions due to switching from dormancy to non-dormancy are within the requirements by analysing HARQ feedback transmitted in PSCell for PSCell. PDCCHs indicating new transmissions shall be sent continuously on SCell from the slot right after $n + \text{ceil}(T_{\text{BWPswitchDelay}}/\text{NR slot length}) + 1$ in Test1, and slot $n + \text{ceil}(T_{\text{BWPswitchDelay}}/\text{NR slot length}) + 2$ in Test2. The test equipment verifies the SCell dormancy switch delay by counting the slots from slot n till an ACK/NACK for SCell is received.

There are two subtests in this test. In Subtest 1 the DCI format 1_1 command for SCell dormancy switch is transmitted within the first 3 OFDM symbols in a slot, and in Subtest 2 the DCI format 1_1 command for SCell dormancy switch is transmitted after the first 3 OFDM symbols in a slot. A UE that only supports triggering during within the first three OFDM symbols of a slot shall only undergo Test1, whereas a UE that supports triggering also in remaining OFDM symbols of a slot shall undergo Test1 and Test2.

Table A.5.5.6.4.1.1-1: Dormancy switch supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: A UE which fulfils the requirements in test case in clause A.5.5.6.4.2 can skip the test cases in current clause A.5.5.6.4.1.	
Note 3: NR configuration is the same for PSCell and SCells.	

Table A.5.5.6.4.1.1-2: General test parameters for Dormancy switch in synchronous EN-DC

Parameter	Unit	Value		Comment
		Subtest 1	Subtest 2	
E-UTRA RF Channel Number		1		One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3		Two NR radio channel is used for this test
Active PCell		Cell 1		PCell on RF channel number 1.
Active PSCell		Cell 2		PSCell on RF channel number 2.
Active SCell		Cell 3		SCell on RF channel number 3.
CP length		Normal		
DRX		OFF		
Measurement gap pattern Id		OFF		
<i>bwp-InactivityTimer</i>	ms	500		
Cell-individual offset for cells on RF channel number 1	dB	0		Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0		Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0		Individual offset for cells on SCC.
Cell2 timing offset to cell1	μs	3		Synchronous EN-DC
Cell3 timing offset to cell2	μs	0		Synchronous cells
Triggering DCI format		DCI 1_1		Triggering DCI format for triggering during active time
OFDM symbol range in slot for transmission of DCI with dormancy indication		0 – 2	3 – 11	Test1 is based on that triggering DCI is received within the first three OFDM symbols of a slot. Test2 is based on that the triggering DCI is received later than within the first three OFDM symbols of a slot.
T1	s	0.2		

T2	s	5	
T3	s	0.2	

Table A.5.5.6.4.1.1-3: NR Cell specific test parameters for Dormancy switch in synchronous EN-DC

Parameter	Unit	Subtest 1		Subtest 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Frequency Range		FR2		FR2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}		100 MHz: N _{RB,c} = 66		100 MHz: N _{RB,c} = 66	
Active BWP ID		0	0	0	0
Initial DL BWP Configuration		DLBWP.0.2	DLBWP.0.2	DLBWP.0.2	DLBWP.0.2
Active DL BWP-0 Configuration		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
Active DL BWP-1 Configuration		NA	DLBWP.1.2	NA	DLBWP.1.2
Initial UL BWP Configuration		ULBWP.0.2	ULBWP.0.2	ULBWP.0.2	ULBWP.0.2
Active UL BWP-0 Configuration		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
Active UL BWP-1 Configuration		NA	ULBWP.1.2	NA	ULBWP.1.2
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET parameters		CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET parameters		CCR.3.1 TDD		CCR.3.2 TDD	CCR.3.1 TDD
OCNG Patterns		OP.1		OP.1	
SSB Configuration		SSB.1 FR2		SSB.1 FR2	
SMTC Configuration		SMTC.1		SMTC.1	
TCI State		TCI.State.0		TCI.State.0	
TRS Configuration		TRS.2.1 TDD		TRS.2.1 TDD	
CSI-RS for CSI reporting		CSI-RS.3.1 TDD		CSI-RS.3.1 TDD	
CSI reporting periodicity	slots	640		640	
SCell measurement cycle (measCycleSCell)	ms	640		640	
Antenna Configuration		1x2		1x2	
Propagation Condition		AWGN		AWGN	
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.					
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3.					

Table A.5.5.6.4.1.1-4: OTA related test parameters for Dormancy switch in synchronous EN-DC

Parameter	Unit	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15	
N_{oc} ^{Note 1}	dBm/15 kHz	-112	-112
SS-RSRP ^{Note 2}	dBm/120 kHz ^{Note 3}	-85	-85
$\hat{E}_s/I_{ot}$	dB	18	18
I_o ^{Note 2}	dBm/95.04 MHz ^{Note 4}	-56	-56
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone.			

A.5.5.6.4.1.2 Test Requirements

During T1, any interruption on PSCell due to dormancy switching of SCell shall be within the requirement specified in clause 8.2.1.2.15.1 for NR victim cell.

During T2, interruptions on PSCell due to CSI and RRM measurements on dormant SCell shall be within the interruption rate requirements specified in 8.2.1.2.15.1 for NR victim cell.

During T3, any interruption on PSCell due to dormancy switching of SCell shall be within the requirement specified in clause 8.2.1.2.15.1 for NR victim cell. Monitoring of PDCCH for SCell in PSCell shall be resumed within the dormancy switching time specified in clause 8.6.2A.

For an event to be considered to be correct, all requirements above have to be fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.6.4.2 E-UTRAN – NR FR1 PSCell SCell dormancy switch of two FR2 SCells outside active time

A.5.5.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify the NR SCell dormant BWP switch delay requirement defined in clause 8.6.2A.1, interruption requirements due to the NR SCell dormant BWP switch defined in clause 8.2.1.2.15.1 for NR victim cells and in clause 7.32.2.14.1 of TS36.133 for E-UTRA victim cell, respectively, and interruption requirements due to CSI and RRM measurements on the NR dormant SCells defined in clauses 8.2.1.2.15.2 and 8.2.1.2.15.3 for NR victim cells and in clause 7.32.2.14.2 of TS36.133 for E-UTRA victim cell, respectively. Supported test configurations are shown in Table A.5.5.6.4.2.1-1.

The general test parameters are given in Table A.5.5.6.4.2.1-2, and NR cell specific test parameters are given in Table A.5.5.6.4.2.1-3 and Table A.5.5.6.4.2.1-4 below. And the E-UTRAN cell specific test parameters can refer to Table A.3.7.2.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR FR1 PSCell (Cell 2), and three NR FR2 SCells (Cell 3-5) as given in Table A.5.5.6.4.2.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and SCell are specified in Table A.5.5.6.4.2.1-3 and Table A.5.5.6.4.2.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1), PSCell (Cell 2), and SCell (Cell 5) to ensure that the UE will have ACK/NACK sending except the time before T1 and during T3. PDCCHs indicating new transmissions shall be sent continuously on SCells (Cell 3,4) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on the cells and the time duration of when active BWP of the cell is dormant.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC), and Cell 3-5 (SCells) on radio channels 3-5 (SCCs), respectively.
- UE is configured with 2 different UE-specific downlink BWPs for Cell 3 and Cell 4, BWP-1 and BWP-2. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB. Here, BWP-2 on Cell 3 and Cell 4 is configured as dormant BWP.
- UE is configured with 1 UE-specific downlink BWP the same as initial BWP for Cell 3 and Cell 4.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in Cell 3 and Cell 4.
- UE is configured with DRX.
- UE is configured to monitor PDCCH for DCI format 2_6 from Cell 2 at *ps-Offset* before the start of *onDuration*. *ps-Offset* is selected to correspond to the dormancy switching time specified in clause 8.6.2A.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, T3, and T4, respectively.

During T1,

Time period T1 starts when a DCI format 2_6 command for Cell 3 and Cell 4 DL BWP switch to BWP-2, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i + T_{\text{MultipleBWPswitchDelay}} + X$) as defined in clause 8.6.2A.2. The UE shall be continuously scheduled on the cell starting from the beginning of the DL slot right after slot ($i + T_{\text{MultipleBWPswitchDelay}} + X$).

The UE shall be able to receive PDSCH at the beginning of the DL slot right after SCell(Cell 5)'s DL slot ($i + T_{\text{MultipleBWPswitchDelay}} + X$) as defined in clause 8.6.2A.2. The UE shall be continuously scheduled on the cell starting from the beginning of the DL slot right after slot ($i + T_{\text{MultipleBWPswitchDelay}} + X$).

PCell(Cell 1) interruption due to dormant BWP switch on PSCell shall occur within the dormant BWP switch delay.

SCell(Cell 5) interruption due to dormant BWP switch on SCell(Cell 5) shall occur within the dormant BWP switch delay.

During T2,

Time period T2 starts when dormant BWP switch latency requirement test is completed. The test equipment shall schedule PDSCH every slot.

The UE shall be able to report ACK/NACK corresponding to the scheduled PDSCH to PSCell except for the allowed times as defined in clauses 8.2.1.2.15.2 and 8.2.1.2.15.3.

The UE shall be able to report ACK/NACK corresponding to the scheduled PDSCH to PCell except for the allowed times as defined in clause 7.32.2.14.2 of TS36.133.

During T3,

Time period T3 starts when interruption due to SSB based RRM measurement and CSI measurement requirements test is completed. Test equipment shall not transmit PDCCH, hence, the UE doesn't monitor PDCCH except DCI format 2_6 based PDCCH.

During T4,

Time period T4 starts when a DCI format 2_6 command for Cell 3 and Cell 4 DL BWP switch to BWP-1, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted j . The UE shall switch its bandwidth part from BWP-2 to BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($j + T_{\text{MultipleBWPswitchDelay}} + X$) as defined in clause 8.6.2A.2. The UE shall be continuously scheduled on the cell starting from the beginning of the DL slot right after slot ($j + T_{\text{MultipleBWPswitchDelay}} + X$).

The UE shall be able to receive PDSCH at the beginning of the DL slot right after all SCell's (Cell 3,4,5) DL slot ($j + T_{\text{MultipleBWPswitchDelay}} + X$) as defined in clause 8.6.2A.2. The UE shall be continuously scheduled on the cells starting from the beginning of the DL slot right after slot ($j + T_{\text{MultipleBWPswitchDelay}} + X$).

PCell(Cell 1) interruption due to dormant BWP switch on PSCell shall occur within the dormant BWP switch delay.

SCell(Cell 5) interruption due to dormant BWP switch on SCell(Cell 5) shall occur within the dormant BWP switch delay.

Table A.5.5.6.4.2.1-1: Supported test configurations for EN-DC DCI 2_6 based Domant BWP Switch on Multiple NR FR2 SCells

Config	Cell 1	Cell 2	Cell 3, Cell 4, Cell 5	DCI 2_6 of Cell 2
1	LTE FDD	15kHz SSB SCS, FDD	120kHz SSB SCS, TDD	within 3 OFDM symbols
2	LTE FDD	15kHz SSB SCS, TDD	120kHz SSB SCS, TDD	within 3 OFDM symbols
3	LTE FDD	30kHz SSB SCS, TDD	120kHz SSB SCS, TDD	within 3 OFDM symbols
4	LTE TDD	15kHz SSB SCS, FDD	120kHz SSB SCS, TDD	within 3 OFDM symbols
5	LTE TDD	15kHz SSB SCS, TDD	120kHz SSB SCS, TDD	within 3 OFDM symbols
6	LTE TDD	30kHz SSB SCS, TDD	120kHz SSB SCS, TDD	within 3 OFDM symbols
7	LTE FDD	15kHz SSB SCS, FDD	120kHz SSB SCS, TDD	after 3 OFDM symbols
8	LTE FDD	15kHz SSB SCS, TDD	120kHz SSB SCS, TDD	after 3 OFDM symbols
9	LTE FDD	30kHz SSB SCS, TDD	120kHz SSB SCS, TDD	after 3 OFDM symbols
10	LTE TDD	15kHz SSB SCS, FDD	120kHz SSB SCS, TDD	after 3 OFDM symbols
11	LTE TDD	15kHz SSB SCS, TDD	120kHz SSB SCS, TDD	after 3 OFDM symbols
12	LTE TDD	30kHz SSB SCS, TDD	120kHz SSB SCS, TDD	after 3 OFDM symbols
Note 1: 10 MHz bandwidth for Cell 2 with 15kHz SSB SCS.				
Note 2: 40 MHz bandwidth for Cell 2 with 30kHz SSB SCS.				
Note 3: 100 MHz bandwidth for Cell 3,4,5.				
Note 4: The UE is only required to be tested in one of the supported test configurations.				

Table A.5.5.6.4.2.1-2: General test parameters for EN-DC DCI 2_6 based Domant BWP Switch on Multiple NR FR2 SCells

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRAN carrier frequency is used.
NR RF Channel Number		2,3,4,5	Four NR radio channels are used for this test. RF channel number 2 is in FR 1 and RF channel numbers 3,4,5 are in a band where intra-band FR2 CA is allowed.
Active PCell		Cell 1	Primary cell on NR RF channel number 1.

Active PSCell		Cell 2	Primary SCG cell on NR RF channel number 2.
Configured activated SCell		Cell 3,4,5	Configured activated secondary cell on NR RF channel numbers 3,4,5.
CP length		Normal	
DRX		DRX.3	As specified in clause A.3.3
ps-Offset		Depending on UE capability	Monitoring of DCI 2_6 ahead of start of drx-onDurationTimer. Value of ps-Offset shall correspond to SCell dormancy switching time for switching of two SCells, as specified in clause 8.6.2A. Actual value depends on reported UE capabilities.
ps-WakeUp		true	Wake up for onDuration in case DCI format 2_6 is not detected.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μs	3	
Cell3,4,5 timing offset to cell1	μs	3	
Timing offset among cell3,4,5	μs	0	
T1	s	0.2	During this time cell 3,4 switch to dormancy from non-dormancy.
T2	s	10	During this time cell 3,4 are dormant.
T3	s	0.1	During this time PDCCH is not transmitted from all cells.
T4	s	0.2	During this time cell 3,4 switch to non-dormancy from dormancy.

Table A.5.5.6.4.2.1-3: Cell specific test parameters for EN-DC DCI 2_6 based Domant BWP Switch on Multiple NR FR2 SCells

Parameter		Unit	Cell 2	Cell 3,4	Cell 5
Frequency range			FR1	FR2	FR2
Duplex mode			FDD	TDD	TDD
TDD configuration	Config 1,4,7,10		NA	TDDConf.3.1	TDDConf.3.1
	Config 2,5,8,11		TDDConf.1.1	TDDConf.3.1	TDDConf.3.1
	Config 3,6,9,12		TDDConf.2.1	TDDConf.3.1	TDDConf.3.1
BW _{channel}	Config 1,2,4,5,7,8,10,11	MHz	10: N _{RB,c} = 52	100: N _{RB,c} = 66	100: N _{RB,c} = 66
	Config 3,6,9,12	MHz	40: N _{RB,c} = 106	100: N _{RB,c} = 66	100: N _{RB,c} = 66
SSB Configuration	Config 1,2,4,5,7,8,10,11		SSB.1 FR1	SSB.1 FR2	SSB.1 FR2
	Config 3,6,9,12		SSB.2 FR1	SSB.1 FR2	SSB.1 FR2
Downlink initial BWP Configuration			DLBWP.0.2	DLBWP.0.2	DLBWP.0.2
Active (non-dormant) DL BWP-1 Configuration			NA	DLBWP.1.1	NA
Active (dormant) DL BWP-2 Configuration			NA	DLBWP.1.1	NS
Uplink initial BWP Configuration			ULBWP.0.2	ULBWP.0.2	ULBWP.0.2

Active Uplink BWP-1 Configuration			NA	ULBWP.1.1	NA
Active Uplink BWP-2 Configuration			NA	ULBWP.1.1	NA
SMTC Configuration			SMTC.1	SMTC.1	SMTC.1
TRS configuration	Config 1,4,7,10		TRS.1.1 FDD	TRS.2.1 TDD	TRS.2.1 TDD
	Config 2,5,8,11		TRS.1.1 TDD	TRS.2.1 TDD	TRS.2.1 TDD
	Config 3,6,9,12		TRS.1.2 TDD	TRS.2.1 TDD	TRS.2.1 TDD
TCI state			TCI.State.0	TCI.State.0	TCI.State.0
PDSCH Reference measurement channel	Config 1,4,7,10		SR.1.1 FDD	SR.3.1 TDD	SR.3.1 TDD
	Config 2,5,8,11		SR.1.1 TDD	SR.3.1 TDD	SR.3.1 TDD
	Config 3,6,9,12		SR.2.1 TDD	SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Parameters	Config 1,4,7,10		CR.1.1 FDD	CR.3.1 TDD	CR.3.1 TDD
	Config 2,5,8,11		CR.1.1 TDD	CR.3.1 TDD	CR.3.1 TDD
	Config 3,6,9,12		CR.2.1 TDD	CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Parameters for scheduling PDCCH	Config 1,4		CCR.1.1 FDD	CCR.3.1 TDD	CCR.3.1 TDD
	Config 7,10		CCR.1.5 FDD	CCR.3.1 TDD	CCR.3.1 TDD CCR.3.1 TDD
	Config 2,5		CCR.1.1 TDD	CCR.3.1 TDD	CCR.3.1 TDD
	Config 8,11		CCR.1.5 TDD	CCR.3.1 TDD	CCR.3.1 TDD
	Config 3,6		CCR.2.1 TDD	CCR.3.1 TDD	CCR.3.1 TDD
	Config 9,12		CCR.2.3 TDD	CCR.3.1 TDD	CCR.3.1 TDD
Dedicated CORESET Parameters for DCI 2_6	Config 1,4		CCR.1.1 FDD	NA	NA
	Config 7,10		CCR.1.5 FDD	NA	NA
	Config 2,5		CCR.1.1 TDD	NA	NA
	Config 8,11		CCR.1.5 TDD	NA	NA
	Config 3,6		CCR.2.1 TDD	NA	NA
	Config 9,12		CCR.2.3 TDD	NA	NA
CSI-RS configuration			NA	CSI-RS.3.1 TDD	NA
OCNG Patterns			OP.1		
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Propagation conditions					

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table A.5.5.6.4.2.1-4: OTA related test parameters for EN-DC DCI 2_6 based Dormant BWP Switch on Multiple NR FR2 SCells

Parameter ^{Note 6}	Unit	Cell 2	Cell 3,4	Cell 5
Angle of arrival configuration		N/A Link only, see clause A.3.7A	Setup 1 defined in clause A.3.15.1	
Assumption for UE beams ^{Note 7}			Fine	Fine
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}		-111.7	-111.7
N_{oc} ^{Note1}	dBm/SCS ^{Note3}		-102.7	-102.7
$\hat{E}_s / N_{oc}$	dB		7	7
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}		-95.7	-95.7
$\hat{E}_s / I_{ot}$	dB		7	7
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}		-65.9	-65.9
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone Note 6: All parameters apply for configuration 1 and 2 Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				

A.5.5.6.4.2.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell from the first UL slot that occurs after the beginning of PSCell's DL slot ($i + T_{\text{MultipleBWPswitchDelay}} + X$) as defined in clause 8.6.2A.2.

During T2, the UE shall transmit at least 98.5% of ACK/NACK on NR PCell.

During T4, the UE shall start to send the ACK for PSCell from the first UL slot that occurs after the beginning of PSCell's DL slot ($j + T_{\text{MultipleBWPswitchDelay}} + X$) as defined in clause 8.6.2A.2.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start of the interruption of PCell and SCell (Cell 5) during dormant BWP switch on SCells (Cell 3,4) shall not happen outside the dormant BWP switch delay.

During T1, the start of the interruption of PCell and SCells (Cell 3,4,5) during dormant BWP switch on SCells (Cell 3,4) shall not happen outside the dormant BWP switch delay.

A.5.5.6.5 Simultaneous RRC-based Active BWP Switch on multiple CCs

A.5.5.6.5.1 E-UTRAN – NR PSCell FR2 and NR SCell FR2 DL active BWP switch on multiple CCs with non-DRX in synchronous EN-DC

A.5.5.6.5.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for simultaneous RRC-based BWP switch on multiple CCs defined in clause 8.6.3A. Supported test configurations are shown in Table A.5.5.6.5.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1) and one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.5.5.6.5.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and NR SCell are specified in Table A.5.5.6.5.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), to Cell 2 (PSCell) on radio channel 2 (PSCC) and to Cell 3 (SCell) on radio channel 3.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 2 (PSCell) and Cell 3 (SCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 2 (PSCell) and Cell 3 (SCell).

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration in Cell 2 and Cell3, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition in Cell 2 and Cell 3.

The UE shall be able to completely receive PDSCH on Cell 2 and Cell 3 at the beginning of the DL slot right after PSCell's DL slot ($i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length}$) as defined in clause 8.6.3A and be ready for the reception of uplink grant for the PSCell no later than at the beginning of the DL slot right after slot ($i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length}$). The UE shall be continuously scheduled on Cell 2's BWP-1 and Cell 3's BWP-1 starting from the beginning of the DL slot right after slot ($i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length}$).

$T_{RRCprocessingDelay}$, $T_{BWPswitchDelayRRC}$ and D_{RRC} are defined in clause 8.6.3A.

The test equipment verifies the DL BWP switch time in Cell 2 and Cell 3 by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.5.5.6.5.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.6.5.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3	Two NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1
Active PSCell		Cell 2	PSCell on RF channel number 2

Active SCell		Cell 3	SCell on RF channel number 3
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	μ s	3	Synchronous EN-DC
Cell3 timing offset to cell2	μ s	0	Synchronous Cells
T1	s	0.2	

Table A.5.5.6.5.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Frequency Range			FR2	FR2
Duplex mode			TDD	TDD
TDD configuration			TDDConf.3.1	TDDConf.3.1
BW _{channel}			100 MHz: N _{RB,C} = 66	100 MHz: N _{RB,C} = 66
Active BWP ID			1	1
Initial DL BWP Configuration			DLBWP.0.2	DLBWP.0.2
Initial UL BWP Configuration			ULBWP.0.2	ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration		DLBWP.1.3	DLBWP.1.3
	Active UL BWP-1 Configuration		ULBWP.1.3	ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration		DLBWP.1.1	DLBWP.1.1
	Active UL BWP-1 Configuration		ULBWP.1.1	ULBWP.1.1
PDSCH Reference measurement channel			SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD	CCR.3.1 TDD
OCNG Patterns			OP.1	OP.1
SSB Configuration			SSB.1 FR2	SSB.1 FR2
SMTC Configuration			SMTC.1	SMTC.1
TCI State			TCI.State.0	TCI.State.0
TRS Configuration			TRS.2.1 TDD	TRS.2.1 TDD
Antenna Configuration			1x2	1x2
Propagation Condition			AWGN	AWGN
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].				

Table A.5.5.6.5.1.1-4: OTA related test parameters for BWP switching test case

Parameter	Unit	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to table A.3.15	Setup 1 according to table A.3.15
Assumption for UE beams ^{Note 5}		Fine	Fine
N_{oc} ^{Note1}	dBm/15kHz	-112	-112
N_{oc} ^{Note1}	dBm/SCS	-103	-103
SS-RSRP ^{Note2}	dBm/SCS ^{Note3}	-85	-85
$\hat{E}_s/I_{ot}$	dB	18	18
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-56	-56
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			

A.5.5.6.5.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell and SCell in the beginning of the DL slot right after slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NRslotlength})$.

All of the above test requirements shall be fulfilled in order for the observed PSCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.7 PSCell addition and release delay

A.5.5.7.1 Addition and Release Delay of NR PSCell

A.5.5.7.1.1 Test purpose and environment

The purpose of this test is to verify that the NR PSCell addition and release delays under EN-DC are within the requirements stated in clause 7.31.2 of TS 36.133 [15] for the case when the PSCell is unknown by the UE at the time of addition.

Supported test configurations are shown in A.5.5.7.1.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.2-1. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.5.5.7.1.1-2, cell-specific parameters in A.5.5.7.1.1-3 and OTA parameters in A.5.5.7.1.1-4 below. The test consists of four successive time periods with duration of T1, T2, T3 and T4. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (NR PSCell) on radio channel 2. The UE is only monitoring the PCC. During T1 only Cell1 is known to the UE.

The test system shall send a RRC message to the UE to add PSCell (Cell 2) on radio channel 2. The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added. The RRC message to add PSCell shall be sent to the UE during period T1. The point in time at which the RRC message to add PSCell (Cell2) is received at the UE antenna connector defines the start of period T2.

The test system shall observe the periodic reporting of CSI for PSCell during T3. The point in time at which the UE has sent PRACH to the PSCell (Cell 2) defines the start of period T3.

The test system shall send a RRC message to the UE to release PSCell (Cell 2) on radio channel 2. The RRC message to release PSCell (Cell2) shall be sent to the UE during period T3, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to release PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

Table A.5.5.7.1.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
2	LTE TDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.7.1.1-2: General Test Parameters for PSCell Addition and Release

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-118	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	s	0	
DRX			OFF	Continuous monitoring of primary cell
PRACH configuration on cell2			FR2 configuration 2	Captured in A.3.8.3.2

Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on carrier frequency of cell2.
T1	s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2	s	1	During this time the UE adds the PSCell.
T3	s	1	During this time the UE sends CSI reports for PSCell.
T4	s	1	During this time the UE releases the PSCell.

Table A.5.5.7.1.1-3: Cell Specific Parameters for PSCell Addition and Release

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA Channel Number		1,2	1			
NR Channel Number		1,2	2			
Duplex Mode		1,2	TDD			
TDD configuration		1,2	TDDConf.3.1			
BW _{channel}	MHz	1,2	100: NRB,c = 66			
Data RBs allocated		1,2	48			
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1			
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1			
TRS Configuration		1	TRS.2.1 TDD			
PDSCH/PDCCH TCI state		1	TCI.State.2			
PDSCH Reference measurement channel		1,2	SR.3.3 TDD			
RMSI CORESET Reference Channel		1,2	CR.3.2 TDD			
Dedicated CORESET Reference Channel		1,2	CCR.3.7 TDD			
OCNG Patterns		1,2	OP.3			
SSB configuration		1,2	SSB.2 FR2			
SMTC configuration		1,2	SMTC.2			
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120			
TRS Configuration		1,2	TRS.2.1 TDD			
CSI-RS configuration for CSI reporting		1,2	CSI-RS.3.1 TDD			
reportConfigType		1,2	periodic			
reportQuantity		1,2	cri-RI-PMI-CQI			
CSI reporting periodicity	slot	1,2	40			
CSI reporting offset	slot	1,2	4			
EPRE ratio of PSS to SSS	dB	1,2	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
Propagation condition						
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].						

Table A.5.5.7.1.1-4: OTA related test parameters

Parameter	Unit	Cell 2			
		T1	T2	T3	T4
Angle of arrival configuration		Setup 2a according to clause A.3.15.2.1			
Assumption for UE beams ^{Note 6}		Rough			
$\hat{E}_s / N_{oc}$ $\hat{E}_s$ ^{Note 2}	dBm/SCS	−∞		−81	
SSB RP ^{Note 2, Note 4}	dBm/SCS	−∞		−81	
$\hat{E}_s / I_{ot_BB}$ ^{Note 2, Note 7}	dB	−∞		4.88	
I_o ^{Note 2, Note 4}	dBm/95.04 MHz	N/A		−56.41	
Note 1: Void Note 2: E_s/I_{ot}, SSB RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: Void Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 7: Calculation of E_s/I_{ot_BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_s from TS 38.101-2 [19] Table 6.2.1.3-4.					

A.5.5.7.1.2 Test Requirements

The UE shall transmit the PRACH to PSCell at latest 582 ms^{Note1} into T2.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T3.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T3

The UE shall stop sending CSI reports for PSCell in at latest 20 ms into T4.

All the above test requirements shall be fulfilled for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 7.31.2 of TS 36.133 [15]:

$$T_{\text{config_PSCell}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search}} + T_{\Delta} + T_{\text{PSCell_DU}} + 2\text{ms}$$

Where:

$$T_{\text{RRC_delay}} = 20\text{ms}$$

$$T_{\text{processing}} = 40\text{ms}$$

$$T_{\text{search}} = 8 \times 3 \times 20 = 480 \text{ ms}$$

$$T_{\Delta} = 20\text{ms}$$

$$T_{\text{PSCell_DU}} = 1 \times 10 + 10 = 20 \text{ ms}$$

A.5.5.8 Active TCI state switch delay

A.5.5.8.1 MAC-CE based active TCI state switch

A.5.5.8.1.1 E-UTRAN – NR PSCell FR2 active TCI state switch for a known TCI state

A.5.5.8.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10.3 Supported test configurations are shown in Table A.5.5.8.1.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.5.5.8.1.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.5.5.8.1.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.8.1.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 2 different TCI states for PSCell, PDCCH TCI state 0 (QCL'd to SSB0) and TCIstate 1 (QCL'd to SSB1), in Cell 2 before starting the test.
- UE is indicated in TCI state 0 as the active PDCCH TCI state

The test consists of two time periods, T1 and T2. Figure A.5.5.8.1.1.1-1 and Figure A.5.5.8.1.1.1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to TCI state 1. *tci-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

The test equipment verifies that UE can be scheduled on PSCell on TCI state 0 till slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$. The test equipment also verifies the TCI state switch time in PSCell by scheduling the UE on TCI state 1 after slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{first-SSB}} + T_{\text{SSB-proc}})/\text{NR slot length}$.

Table A.5.5.8.1.1.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.8.1.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell

Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μ s	3	Synchronous EN-DC
T1	s	0.2	
T2	s	0.2	

Table A.5.5.8.1.1.1-3: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW_{channel}		100 MHz: $N_{RB,C} = 66$
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTc Configuration		SMTc.1
TCI State 0		TCI.State.2
TCI State 1		TCI.State.3
TRS Configuration		TRS.2.1 TDD TRS.2.2 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		No external noise (Note 2)
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].		

Table A.5.5.8.1.1.1-4: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 2			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	

$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B RP ^{Note 2}	dBm/ SCS	-80.6	-80.6	- Infinity	-80.6
$\hat{E}_s/I_{BB}$ ^{Note 7}	dB	8.3	8.3	-Infinity	8.3
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-55.41	-55.41	- Infinity	-55.41
Note 1: Void Note 2: SS B_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the center of the quiet zone. Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 7: Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					

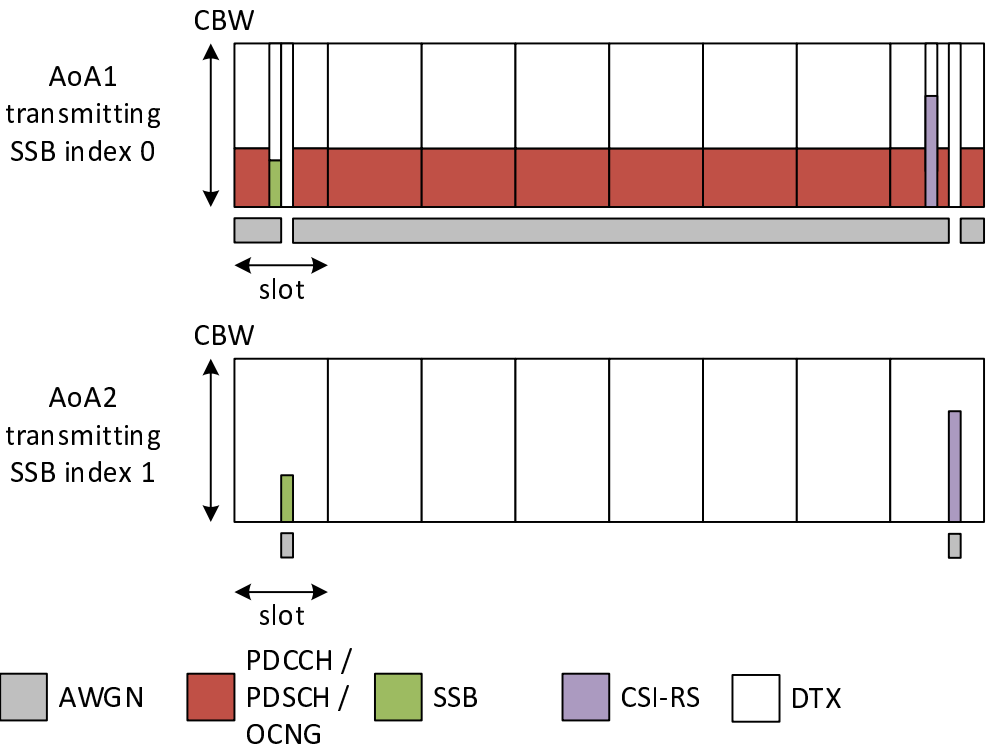


Figure A.5.5.8.1.1.1-1: Time multiplexed downlink transmissions during T1

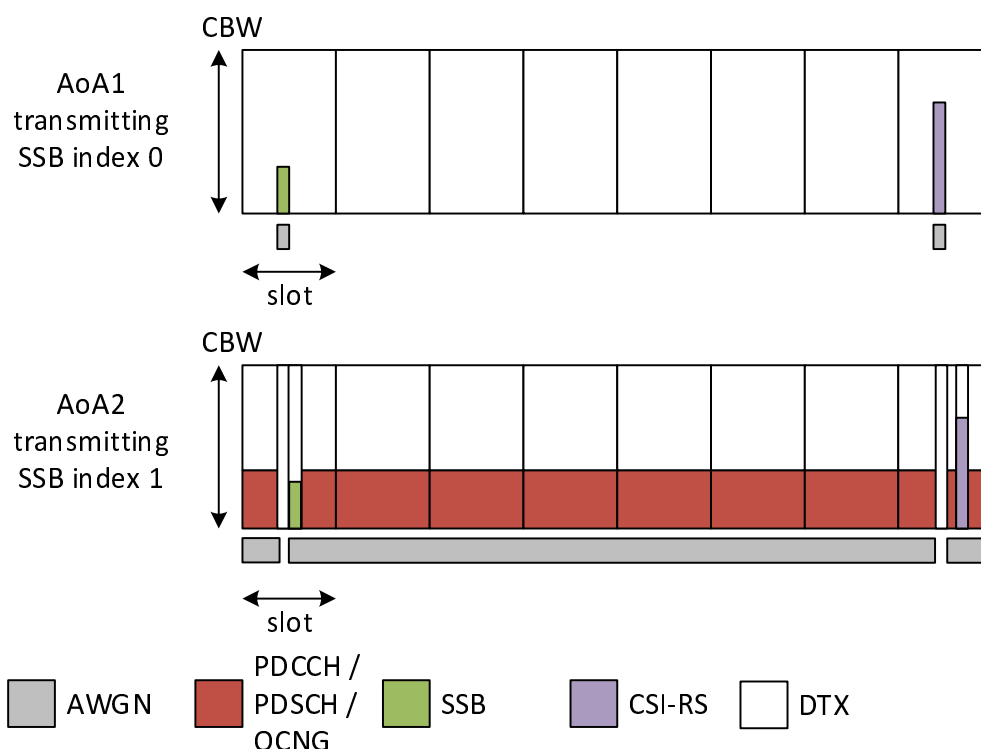


Figure A.5.5.8.1.1.1-2: Time multiplexed downlink transmissions during T2

A.5.5.8.1.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n , UE shall:

- be able to continue to receive on TCI state 0 till slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$
- be able to start receiving on TCI state 1 after slot $n + T_{\text{HARQ}} + 5N_{\text{slot}}^{\text{subframe},\mu} + T_{\text{first-SSB}}/\text{NR slot length}$

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.8.2 RRC based active TCI state switch

A.5.5.8.2.1 E-UTRAN – NR PSCell FR2 active TCI state switch for a known TCI state

A.5.5.8.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10.3 Supported test configurations are shown in Table A.5.5.8.2.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.5.5.8.2.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.5.5.8.2.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.8.2.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 1 TCI state for PSCell, PDCCH-TCI-state0 (QCL'd to SSB0)
- UE is indicated in TCI state0 as the active TCI state

The test consists of two time periods, T1 and T2. Figure A.5.5.8.2.1.1-1 and Figure A.5.5.8.2.1.1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI-state1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280 ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a RRC command indicating a switch to TCI-state1.

The test equipment verifies the TCI state switch time in PSCell by scheduling the UE on TCI state 1 after slot $n + (T_{\text{RRC_processing}} + T_{\text{first-SSB}}) / \text{NR slot length} + 2N_{\text{slot}}^{\text{subframe}, \mu}$.

Table A.5.5.8.2.1.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.8.2.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
T1	s	0.2	
T2	s	0.2	

Table A.5.5.8.2.1.1-3: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		100 MHz: N _{RB,C} = 66
Data RBs allocated		24

Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TC.State.2
TCI State 1		TCI.State.3
TRS Configuration		TRS.2.1 TDD TRS.2.2 TDD
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	640
timeRestrictionForChannelMeasurements		configured
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		No external noise (Note 2)
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].		

Table A.5.5.8.2.1.1-4: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 2			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams ^{Note 6}		Rough		Rough	
$\bar{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SSB RP ^{Note 2}	dBm/ SCS	-80.6	-80.6	- Infinity	-80.6
I_0 ^{Note2}	dBm/95.04 MHz ^{Note4}	-55.41	-55.41	- Infinity	-55.41

- Note 1: Void
- Note 2: SS B_{RP} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
- Note 3: Void
- Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
- Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.
- Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
- Note 7: Calculation of Es/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

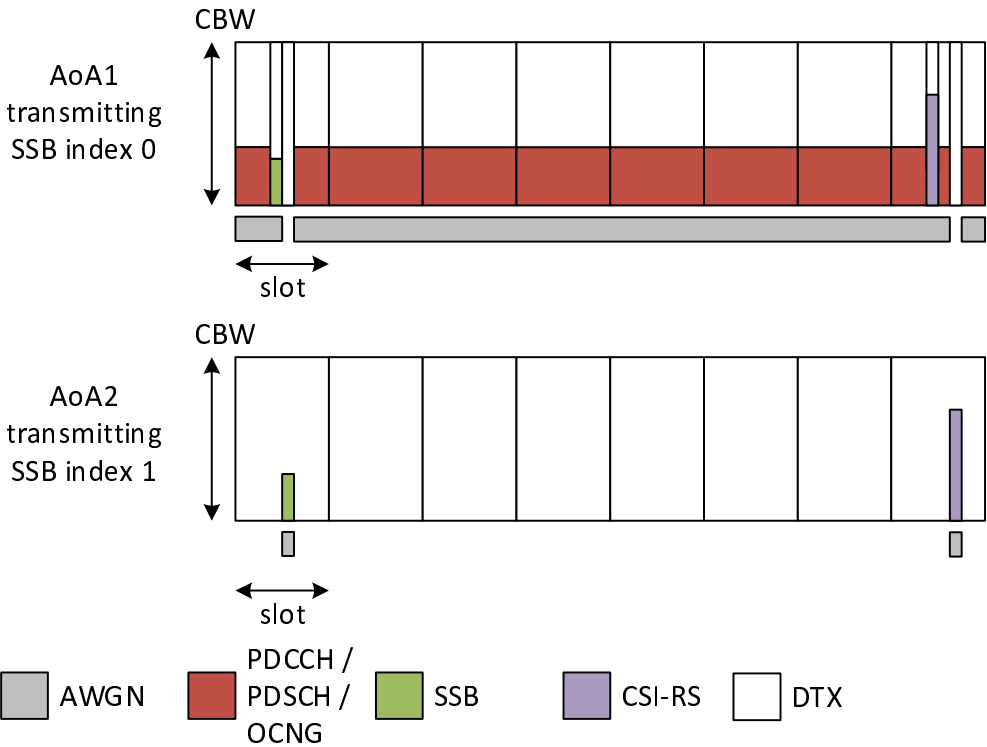


Figure A.5.5.8.2.1.1-1: Time multiplexed downlink transmissions during T1

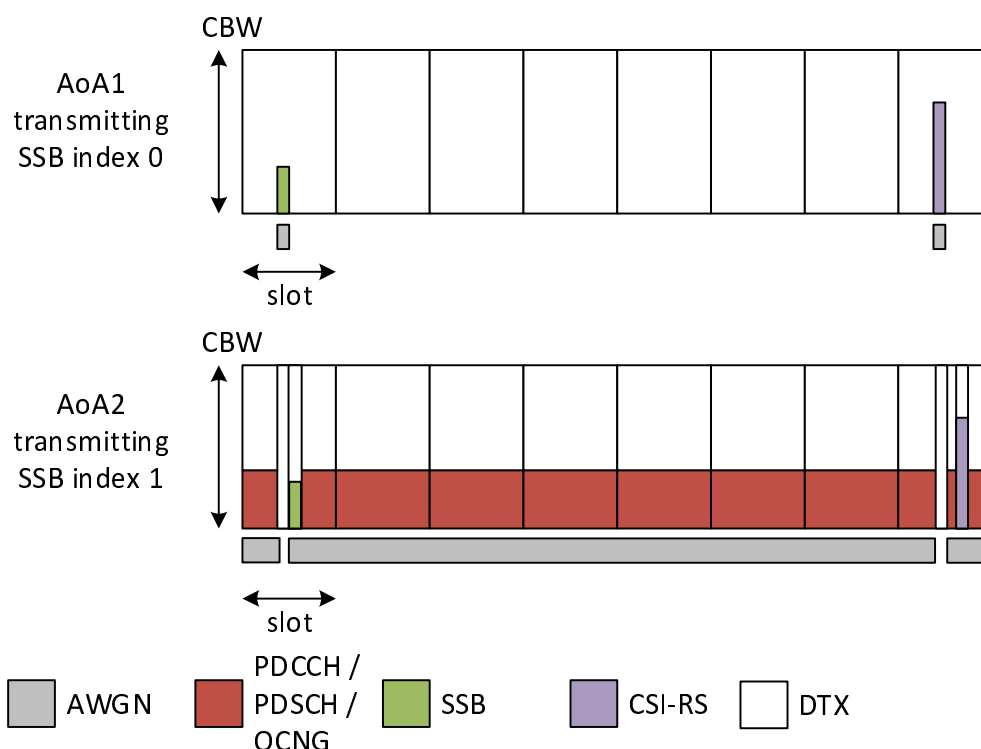


Figure A.5.5.8.2.1.1-2: Time multiplexed downlink transmissions during T2

A.5.5.8.2.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with both SSB0 and SSB1.

After receiving RRC command in slot n , UE shall be able to start receiving on TCI state 1 after slot $n + (T_{\text{RRC_processing}} + T_{\text{first-SSB}}) / \text{NR slot length} + 2N_{\text{slot}}^{\text{subframe}, \mu}$.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.9 Uplink spatial relation switch delay

A.5.5.9.1 MAC-CE based uplink spatial relation switch

A.5.5.9.1.1 E-UTRAN – NR PSCell FR2 uplink spatial relation switch for a known spatial relation

A.5.5.9.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the uplink spatial relation switch delay requirement defined in clause 8.12.3 by a UE capable of beam correspondence without the need for UL beam sweeping. Supported test configurations are shown in Table A.5.5.9.1.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.5.5.9.1.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific

parameters of NR PSCell is specified in Table A.5.5.9.1.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.9.1.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have continuous ACK/NACK sending by PUCCH.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 2 different spatial relations for PSCell, PUCCH spatial relation 0 (QCL'd to SSB0) and spatial relation 1 (QCL'd to SSB1), in Cell 2 before starting the test.
- UE is indicated in spatial relation 0 as the active PUCCH spatial relation

The test consists of two time periods, T1 and T2. During T1 only SSB to which PUCCH spatial relation 0 QCLed is transmitted. At the beginning of T2, the SSB corresponding to spatial relation 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to transmit PUCCH with spatial relation 1.

The test equipment verifies that UE can be scheduled on PSCell on spatial relation 0 till $n + T_{\text{HARQ}}/\text{NR slot length} + 3N_{\text{slot}}^{\text{subframe},\mu}$. The test equipment also verifies the spatial relation switch time in PSCell by scheduling the UE on spatial relation 1 from slot $n + T_{\text{HARQ}}/\text{NR slot length} + 3N_{\text{slot}}^{\text{subframe},\mu} + 1$ and onwards.

Table A.5.5.9.1.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.9.1.1-2: General test parameters for spatial relation switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	0.2	
T2	s	2	

Table A.5.5.9.1.1.1-3: NR Cell specific test parameters for spatial relation switch

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW_{channel}		100 MHz: $N_{\text{RB,C}} = 66$
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
Spatial Relation 0		PUCCH. SRI.0
Spatial Relation 1		PUCCH. SRI.1
TRS Configuration		TRS.2.1 TDD
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
timeRestrictionForChannelMeasurements		configured
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS (Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.5.5.9.1.1.1-4: OTA related test parameters for uplink spatial relation switch

Parameter	Unit	Cell 2			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
Assumption for UE beams ^{Note 6}		AoA1		AoA2	
		Rough			
Noc ^{Note 1}	dBm/15 kHz	-92.1			
Noc ^{Note 1}	dBm/SCS	-83.1			
Ês/Noc	dB	1	1	-Infinity	1
SS-RSRP ^{Note 2}	dBm/120 kHz ^{Note3}	-82.1	-82.1	-Infinity	-82.1
Io ^{Note2,Note6}	dBm/95.04 MHz ^{Note4}	-50.6	-50.6	-54.1	-50.6

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.5.5.9.1.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with results for SSB1.

After receiving MAC-CE command in slot n , UE shall:

- be able to continue to transmit PUCCH on spatial relation 0 till $n + T_{HARQ}/NR \text{ slot length} + 3N_{slot}^{subframe,\mu}$,
- be able to start transmitting PUCCH on spatial relation 1 from slot $n + T_{HARQ}/NR \text{ slot length} + 3N_{slot}^{subframe,\mu} + 1$.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.9.2 RRC based spatial relation switch

A.5.5.9.2.1 E-UTRAN – NR PSCell FR2 spatial relation switch associated with a known DL-RS

A.5.5.9.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the RRC based spatial relation switch delay requirement defined in clause 8.12.5 by a UE capable of beam correspondence without the need for UL beam sweeping. Supported test configurations are shown in Table A.5.5.9.2.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.5.5.9.2.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.5.5.9.2.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.9.2.1.1-4.

Periodic SRS is transmitted on NR PSCell (Cell2), and the SRS configuration is SRSConf.1 given in Table A.5.4.1.1.1-3.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 1 SRS-SpatialRelation0 associated with SSB0.
- UE is indicated SRS-SpatialRelation0 as the active SRS spatial relation.

The test consists of two time periods, T1 and T2. During T1 only SSB0 to which SRS-SpatialRelation0 associated is transmitted. UE shall transmit periodic SRS with SRS-SpatialRelation0 of PSCell. At the beginning of T2, the SSB1 corresponding to SRS-SpatialRelation1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured. In slot n which is within 1280 ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a RRC command indicating a switch to transmit periodic SRS with target SRS-SpatialRelation1. The test equipment verifies that UE

shall be able to transmit periodic SRS with target spatial relation (SRS-SpatialRelation1) on PSCell in the slot $n + T_{\text{RRC_processing}}/\text{NR slot length} + 1$.

Table A.5.5.9.2.1.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.5.5.9.2.1.1-2: General test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
T1	s	0.2	
T2	s	2	

Table A.5.5.9.2.1.1-3: NR Cell specific test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		100 MHz: N _{RB,C} = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTTC Configuration		SMTTC.1
SRS-SpatialRelation0		SRS.SRI0
SRS-SpatialRelation1		SRS.SRI1
TRS Configuration		TRS.2.1 TDD
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	160
timeRestrictionForChannelMeasurements		configured

Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS (Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.5.5.9.2.1.1-4: OTA related test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Cell 2			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams ^{Note 6}		Rough		Rough	
N _{oc} ^{Note 1}	dBm/15 kHz	-92.1			
N _{oc} ^{Note 1}	dBm/SCS	-83.1			
Ê _s /N _{oc}	dB	1	1	-Infinity	1
SS-RSRP ^{Note 2}	dBm/120 kHz ^{Note3}	-82.1	-82.1	-Infinity	-82.1
I _o ^{Note2,Note6}	dBm/95.04 MHz ^{Note4}	-50.6	-50.6	-54.1	-50.6
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 2:	SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	As observed with 0dBi gain antenna at the center of the quiet zone.				
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.5.9.2.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with SSB1 to which SRS-SpatialRelation1 is associated.

After receiving RRC command in slot n , UE shall be able to transmit target periodic SRS with SRS-SpatialRelation1 on PSCell in the slot $n + T_{RRC_processing}/NR \text{ slot length} + 1$.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.10 UE specific CBW change

A.5.5.10.1 UE specific CBW change on FR2 NR PSCell

A.5.5.10.1.1 Test Purpose and Environment

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13. Supported test configurations are shown in Table A.5.5.10.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1) and one NR PSCell (Cell 2) as given in Table A.5.5.10.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell are specified in Table A.5.5.10.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 2 (PSCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PSCell.
- UE is indicated in *SCS-SpecificCarrier* that the active CBW is CBW-1 of initial condition in PSCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRConfigReconfiguration* which reconfigure the UE specific CBW parameter, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted *i*. The UE shall reconfigure its UE specific CBW with the updated UE specific CBW of final condition.

The UE shall be able to completely receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i + \frac{T_{RRCP\text{rocessingDelay}} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$) as defined in clause 8.13 and be ready for the reception of uplink grant for the PSCell no later than at the beginning of the DL slot right after slot ($i + \frac{T_{RRCP\text{rocessingDelay}} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$). The UE shall be continuously scheduled on PSCell's BWP-1 on CBW-2 starting from the beginning of the DL slot right after slot ($i + \frac{T_{RRCP\text{rocessingDelay}} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$).

$T_{RRCP\text{rocessingDelay}}$ and $T_{CBWchangeDelayRRC}$ are defined in clause 8.13.

The test equipment verifies the UE specific CBW change switch time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated UE specific CBW configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.5.5.10.1.1-1: UE specific CBW change supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.10.1.1-2: General test parameters for UE specific CBW change in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
T1	s	0.2	

Table A.5.5.10.1.1-3: NR Cell specific test parameters for UE specific CBW change in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode			TDD
TDD configuration			TDDConf.3.1
BW _{channel}			100 MHz: N _{RB,c} = 66
Active BWP ID			1
Initial DL BWP Configuration			DLBWP.0.2
Initial UL BWP Configuration			ULBWP.0.2
Active DL BWP Configuration			DLBWP.1.3
Active UL BWP Configuration			DLBWP.1.3
Initial Condition	Active DL CBW-1 Configuration		DLCBW.1.1
	Active UL CBW-1 Configuration		ULCBW.1.1
Final Condition	Active DL CBW-1 Configuration		DLCBW.1.2
	Active UL CBW-1 Configuration		ULCBW.1.2
PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			

EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.	
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.	
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.	
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].	

Table A.5.5.10.1.1-4: OTA related test parameters for UE specific CBW change test case

Parameter		Unit	Cell 2
Angle of arrival configuration			Setup 1 according to table A.3.15
Assumption for UE beams ^{Note 5}			Fine
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/15kHz	-112
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/SCS	-103
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
SS-RSRP ^{Note2}	NR_TDD_FR2_A	dBm/SCS ^{Note3}	-85
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s/I_{ot}$		dB	18
I_o ^{Note2}	NR_TDD_FR2_A	dBm/95.04 MHz ^{Note4}	-56
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		

Note 1:

Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2:

SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3:

SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Note 4:

Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone

Note 5:

Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.5.10.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell in the beginning of the DL slot right after slot $(i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length})$.

All of the above test requirements shall be fulfilled in order for the observed PSCell UE specific CBW change switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.11 Unified TCI state switch delay

A.5.5.11.1 MAC-CE based active joint TCI state switch

A.5.5.11.1.1 E-UTRAN – NR PSCell FR2 active joint TCI state switch for a known TCI state

A.5.5.11.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the MAC-CE based joint TCI state switch delay requirement defined in clause 8.15.3 and 8.16.3 by a UE capable of beam correspondence without the need for UL beam sweeping. Supported test configuration is shown in Table A.5.5.11.1.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.5.5.11.1.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.2-1 and cell-specific parameters of NR PSCell is specified in Table A.5.5.11.1.1.2-1 below. The OTA related test parameters for FR2 are shown in Table A.5.5.11.1.1.2-2.

PDCCHs indicating new transmissions shall be sent continuously on PSCell to ensure that the UE would have ACK/NACK sending.

Table A.5.5.11.1.1.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.11.1.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel No.		Channel 1	One E-UTRA radio channel is used for this test
NR RF Channel No.		Channel 2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
L1-RSRP reporting period		160	Periodic L1-RSRP reporting configured

L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of RS for L1-RSRP reporting		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	0.2	
T2	s	2	

A.5.5.11.1.1.2 Test parameters

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is provided with *dl-OrJoint-TCIStateList-r17* and UE's higher layer signalling *unifiedTCI-StateType-r17* in IE *MIMOParam-r17* is set to *joint*.
- UE is configured with 2 different DLorJoint States for PSCell, Joint TCI state 0 (QCL'd to SSB0) and Joint TCI state 1 (QCL'd to SSB1) before starting the test,
- UE is indicated in Joint TCI state 0 as the active joint TCI state.

The test consists of two time periods, T1 and T2. Figure A.5.5.11.3.1.1-1 and Figure A.5.5.11.3.1.1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB0 to which Joint TCI state 0 is QCL'd is transmitted. At the beginning of T2, the SSB1 corresponding to Joint TCI state 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot *n* which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to Joint TCI state 1. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The test equipment verifies that UE shall be able to receive and transmit with Joint TCI state 0 until slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$, and shall be able to receive and transmit with Joint TCI state 1 from slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{first_target-PL-RS}} + 4 \cdot T_{\text{target_PL-RS}} + 2\text{ms}) / NR \text{ slot length}$.

Table A.5.5.11.1.1.2-1: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		100 MHz: $N_{\text{RB,C}} = 66$
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTc Configuration		SMTc.1
Joint TCI State 0		DLorJoint TCI.State.2
Joint TCI State 1		DLorJoint TCI.State.3

TRS Configuration		TRS.2.1 TDD for DLorJoint TCI.State.2 TRS 2.2 TDD for DLorJoint TCI.State.3
Pathloss RS Configuration		Resource #4 in TRS.2.1 TDD for DLorJoint TCI.State.2 and for DLorJoint TCI.State.3
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.5.5.11.1.1.2-2: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 2			
		SSB#0		SSB#1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams ^{Note 6}		Rough for SSB reception			
Noc ^{Note 1}	dBm/15 kHz	-92.1			
Noc ^{Note 1}	dBm/SCS	-83.1			
Ês/Noc	dB	1	1	-Infinity	1
SS-RSRP ^{Note 2}	dBm/120 kHz ^{Note3}	-82.1	-82.1	-Infinity	-82.1
Io ^{Note2,Note6}	dBm/95.04 MHz ^{Note4}	-55.0	-55.0	-58.5	-55.0
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.					
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.					
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.					

A.5.5.11.1.1.3 Test Requirements

The test verifies that UE can be scheduled by PSCell on Joint TCI state 0 and Joint TCI state 1.

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n, UE shall:

- be able to receive and transmit with Joint TCI state 0 until slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$
- be able to start receiving and transmitting with Joint TCI state 1 after slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{first_target_PL-RS}} + 4 \cdot T_{\text{target_PL-RS}} + 2\text{ms}) / \text{NR slot length}$

The rate of correct events observed during repeated tests shall be at least 90%

A.5.5.11.2 MAC-CE based active uplink TCI state switch

A.5.5.11.2.1 E-UTRAN – NR PSCell FR2 active uplink TCI state switch for a known TCI state

A.5.5.11.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the MAC-CE based uplink TCI state switch delay requirement defined in clause 8.16.3 by a UE capable of beam correspondence without the need for UL beam sweeping. Supported test configurations are shown in Table A.5.5.11.2.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.5.5.11.2.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.2-1 and cell-specific parameters of NR PSCell is specified in Table A.5.5.11.2.1.2-1 below. The OTA related test parameters for FR2 is shown in Table A.5.5.11.2.1.2-2.

Table A.5.5.11.2.1.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.11.2.1.1-2: General test parameters for spatial relation switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel No.		Channel 1	One E-UTRA radio channel is used for this test
NR RF Channel No.		Channel 2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	0.2	
T2	s	2	

A.5.5.11.2.1.2 Test parameters

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC);

- PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have continuous ACK/NACK sending by PUCCH;
- UE is provided with *TCI-UL-State-r17* and UE's higher layer signalling *unifiedTCI-StateType-r17* in IE *MIMOParam-r17* is set to *separate*;
- UE is configured with 2 different uplink TCI states for PSCell, uplink TCI state 0 (associated with SSB0) and uplink TCI state 1 (associated with SSB1), by using RRC signalling *ul-TCI-StateList-r17* in IE *BWP-UplinkDedicated*, in Cell 2 before starting the test;
- UE is indicated uplink TCI state 0 as the active uplink TCI state.

The test consists of two time periods, T1 and T2. During T1 only SSB#0 with which uplink TCI state 0 is associated is transmitted. At the beginning of T2, the SSB#1 corresponding to uplink TCI state 1 starts transmitting. After the beginning of T2, in slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB#0 and SSB#1, UE receives a MAC-CE command indicating a switch to transmit PUCCH with uplink TCI state 1. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

Index of CSI-RS#1 is configured for UE as *PUSCH-PathlossReferenceRS-Id-r17* which is indicated in *TCI-UL-State-r17* of uplink TCI state 1. CSI-RS#1 is QCLed typeD with SSB#1. UE does not maintain CSI-RS#1 as pathloss RS before the uplink TCI state switching.

Table A.5.5.11.2.1.2-1: NR Cell specific test parameters for uplink TCI state switch

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		100 MHz: N _{RB,C} = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
DL TCI State		DLorJoint TCI.State.0
PL-RS Configuration (CSI-RS#1)		Resource #4 in TRS.2.1 TDD for UL TCI.State.2 Resource #4 in TRS.2.2 TDD for UL TCI.State.3
Uplink TCI State 0		UL TCI.State.2
Uplink TCI State 1		UL TCI.State.3
TRS Configuration		TRS.2.1 TDD
reportQuantity for SSB		ssb-Index-RSRP-Index-r17
reportConfigType for SSB		periodic
reportQuantity for CSI-RS		cri-RSRP-Index-r17
reportConfigType for CSI-RS		periodic
timeRestrictionForChannelMeasurements		configured
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		

EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS (Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.5.5.11.2.1.2-2: OTA related test parameters for uplink spatial relation switch

Parameter	Unit	Cell 2			
		SSB#0		SSB#1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams ^{Note 6}		Rough for SSB reception			
Noc ^{Note 1}	dBm/15 kHz	-92.1			
Noc ^{Note 1}	dBm/SCS	-83.1			
Ês/Noc	dB	1	1	-Infinity	1
SS-RSRP ^{Note 2}	dBm/120 kHz ^{Note3}	-82.1	-82.1	-Infinity	-82.1
Io ^{Note2,Note6}	dBm/95.04 MHz ^{Note4}	-55.0	-55.0	-58.5	-55.0
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for Noc to be fulfilled.				
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	As observed with 0dBi gain antenna at the center of the quiet zone.				
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				

A.5.5.11.2.1.3 Test Requirements

The test verifies that UE can be scheduled by PSCell on uplink TCI state 0 and uplink TCI state 1. The test also verifies the active uplink TCI state switch time in PSCell meeting the requirement defined in 8.16.3. Specifically,

During T2, UE shall send L1-RSRP report with results for SSB#0 and SSB#1 before sending MAC-CE command.

After receiving MAC-CE command in slot n in T2, UE shall:

- be able to continue to transmit PUCCH on uplink TCI state 0 till slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu}$;
- be able to start transmitting PUCCH on uplink TCI state 1 from slot $n + T_{HARQ} + 3N_{slot}^{subframe,\mu} + (T_{first_target_PL-RS} + 4 \cdot T_{target_PL-RS} + 2ms) / NR \text{ slot length}$ and onwards.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.11.3 MAC-CE based active downlink TCI state switch

A.5.5.11.3.1 E-UTRAN – NR PSCell FR2 downlink TCI state switch to cell with additional PCI for a known TCI state

A.5.5.11.3.1.1 Test Purpose and Environment

The purpose of this test is to verify the active DL TCI state switch delay requirement for unified TCI defined in clause 8.15.3. Supported test configurations are shown in Table A.5.5.X.3.1.1-1.

Table A.5.5.11.3.1.1-1: Supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

A.5.5.11.3.1.2 Test Parameters

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2), and one NR cell with additional PCI different from from serving cell (Cell 3) configured for intercell L1-RSRP measurement and report as given in Table A.5.5.11.3.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and cell with additional PCI are specified in Table A.5.5.11.3.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.5.5.11.3.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) and cell with additional PCI (Cell 3) to ensure that the UE would have ACK/NACK transmission.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC), Cell 3 (Cell with additional PCI) in radio channel 3.
- UE is provided with *dl-OrJoint-TCIStateList-r17* and UE's higher layer signalling *unifiedTCI-StateType-r17* in IE *MIMOParam-r17* is set to *seperate*;
- UE is configured with L1-RSRP measurements on cell with additional PCI (Cell 3)
- UE is configured with 2 different TCI states for PSCell, PDCCH TCI state 0 (QCL'd to TRS resource set 1, TCI state of which is QCLed to SSB0 of Cell2) and TCI state 1 (QCL'd to TRS resource set 3, TCI state of which is QCLed to SSB1 of Cell3), in Cell 2 before starting the test.
- UE is indicated in TCI state 0 as the active PDCCH TCI state

The test consists of two time periods, T1 and T2. Figure A.5.5.11.3.1.1-1 and Figure A.5.5.11.3.1.1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 of cell 2 and SSB1 of cell 3, UE receives a MAC-CE command indicating a switch to TCI state 1. *tcI-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

The test equipment verifies that UE can be scheduled on PSCell on TCI state 0 till slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$. The test equipment also verifies the TCI state switch time in to cell with additional PCI by scheduling the UE on TCI state 1 after slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{first-SSB}} + T_{\text{SSB-proc}})/\text{NR slot length}$.

Table A.5.5.11.3.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Cell with additional PCI		Cell 3	Cell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
Cell3 timing offset to cell2	μs	0	
T1	s	0.2	
T2	s	2	

Table A.5.5.11.3.1.1-3: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 2
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		100 MHz: N _{RB,c} = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
DL TCI State 0		DLorJoint TCI.State.0
DL TCI State 1		DLorJoint TCI.State.1
UL TCI State 0		UL TCI.State.0
UL TCI State 1		UL TCI.State.1
Pathloss RS Configuration		Resource #4 in TRS.2.1 TDD
TRS Configuration		TRS.2.1 TDD for DLorJoint TCI.State.0 TRS.2.2 TDD for DLorJoint TCI.State.1
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		

Propagation Condition		No external noise (Note 2)
Note 1:	OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.	
Note 2:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].	

Table A.5.5.11.3.1.1-4: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 2		Cell 3	
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
$\hat{E}_s$	dBm/SCS	AoA1		AoA2	
SS B _{RP} ^{Note 2}	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s/I_{otBB}$ ^{Note 7}	dB	8.3	8.3	-Infinity	8.3
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-56.0	-56.0	- Infinity	-56.0
Note 1: Void Note 2: SS B_{RP} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the center of the quiet zone. Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 7: Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					

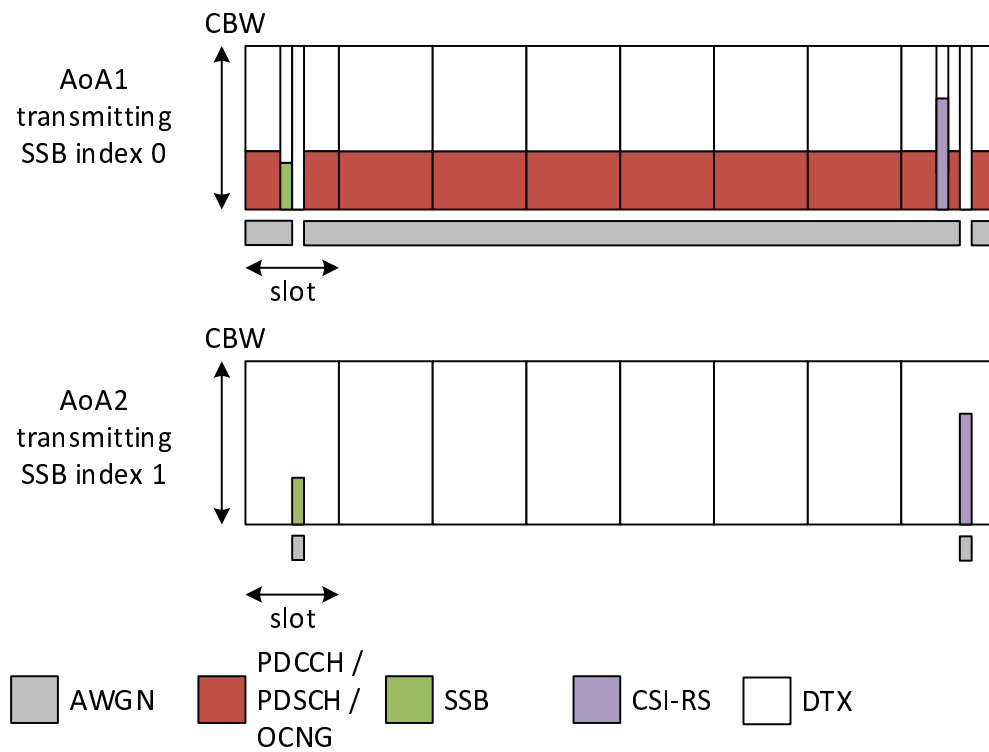


Figure A.5.5.11.3.1.1-1: Time multiplexed downlink transmissions during T1

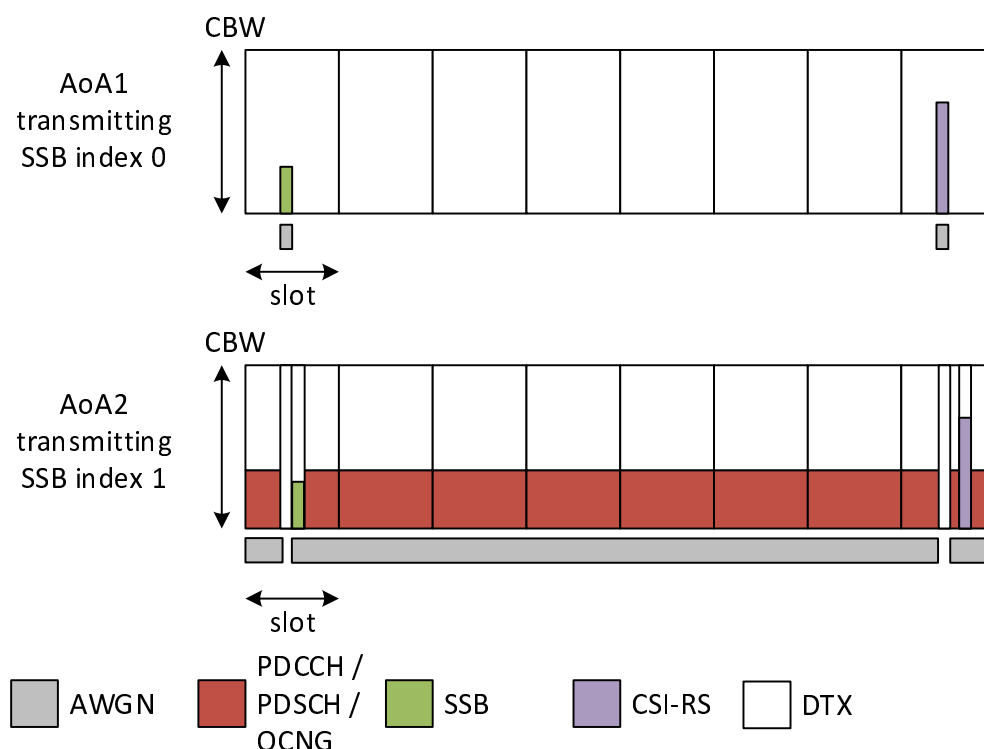


Figure A.5.5.11.3.1.1-2: Time multiplexed downlink transmissions during T2

A.5.5.11.3.1.3 Test Requirements

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n , UE shall:

- be able to continue to receive on DL TCI state 0 till slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe}, \mu}$
- be able to start receiving on DL TCI state 1 after slot $n + T_{\text{HARQ}} + (5 \text{ ms} + T_{\text{first-SSB}}) / \text{NR slot length}$

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.5.12 PSCell activation and deactivation delay

A.5.5.12.1 PSCell activation and deactivation delay

A.5.5.12.1.1 Test purpose and environment

The purpose of this test is to verify that the NR PSCell activation and deactivation delay under EN-DC are within the requirements stated in clause 7.38 in TS 36.133 [15] for the case when UE configured with one deactivated SCG and when PSCell in one SCG is being activated where the PSCell is known by the UE at the time of activation.

Supported test configurations are shown in A.5.5.12.1.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.2-1. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.5.5.12.1.1-2, cell-specific parameters in A.5.5.12.1.1-3 and OTA parameters in A.5.5.12.1.1-4 below. The test consists of four successive time periods with duration of T1, T2, T3 and T4. There are two carriers each with one cell. The UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) and PSCell (Cell2) is in deactivated state. During T1, both Cell1 and Cell2 are known to UE and UE performs measurement on deactivated PCell. Before the test starts the UE is configured RLM and BFD on deactivated PSCell. During T1, UE performs RLM and BFD on the deactivated PSCell and TCI state is known.

The test system shall send a RRC message to the UE to activate PSCell (Cell 2) on radio channel 2, where no any PSCell parameter is modified in the RRC message. The RRC message (to activate PSCell) also includes a request for the UE to transmit scheduling request on PUCCH for the PSCell after the PSCell has been successfully activated. The RRC message to activate PSCell shall be sent to the UE during period T1. The point in time at which the RRC message to activate PSCell (Cell2) is received at the UE antenna connector defines the start of period T2.

The test system shall observe the periodic reporting of CSI for PSCell during T3. The point in time at which the UE has sent scheduling request on PUCCH for PSCell (Cell 2) defines the start of period T3.

The test system shall send a RRC message to the UE to deactivate PSCell (Cell 2) on radio channel 2. The RRC message to deactivate PSCell (Cell2) shall be sent to the UE during period T3, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to deactivate PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

Table A.5.5.12.1.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
2	LTE TDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.12.1.1-2: General Test Parameters for PSCell activation and deactivation

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Deactivated cell		Cell2	SCell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Deactivated cell		Cell2	PSCell deactivated on RF channel number 2.
DRX			OFF	Continuous monitoring of primary cell
Scheduling request resource periodicity			20ms	At the starting of period T3, UE sends a SR on PUCCH for PSCell
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	1	During this time the UE adds the PSCell.
T3		s	1	During this time the UE sends CSI reports for PSCell.
T4		s	1	During this time the UE releases the PSCell.

Table A.5.5.12.1.1-3: Cell Specific Parameters for PSCell activation and deactivation

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA Channel Number		1,2	1			
NR Channel Number		1,2	2			
Duplex Mode		1,2	TDD			
TDD configuration		1,2	TDDConf.3.1			
BW _{channel}	MHz	1,2	100: NRB,c = 66			
Data RBs allocated		1,2	48			

Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1
TRS Configuration		1	TRS.2.1 TDD
PDSCH/PDCCH TCI state		1	TCI.State.2
PDSCH Reference measurement channel		1,2	SR.3.3 TDD
RMSI CORESET Reference Channel		1,2	CR.3.2 TDD
Dedicated CORESET Reference Channel		1,2	CCR.3.7 TDD
OCNG Patterns		1,2	OP.3
SSB configuration		1,2	SSB.2 FR2
SMTC configuration		1,2	SMTC.2
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120
TRS Configuration		1,2	TRS.2.1 TDD
CSI-RS configuration for CSI reporting		1,2	CSI-RS.3.1 TDD
reportConfigType		1,2	periodic
reportQuantity		1,2	cri-RI-PMI-CQI
CSI reporting periodicity	slot	1,2	40
CSI reporting offset	slot	1,2	4
EPRE ratio of PSS to SSS	dB	1,2	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation condition		1,2	No external noise (Note 1)
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].			

Table A.5.5.12.1.1-4: OTA related test parameters

Parameter	Unit	Cell 2			
		T1	T2	T3	T4
Angle of arrival configuration		Setup 2a according to clause A.3.15.2.1			
Assumption for UE beams ^{Note 6}		Rough			
$\hat{E}_s / N_{oc}$ $\hat{E}_s$ ^{Note 2}	dBm/SCS	-81			
SSB R_P ^{Note 2, Note 4}	dBm/SCS	-81			
$\hat{E}_s / I_{ot_BB}$ ^{Note 2, Note 7}	dB	4.88			
I_o ^{Note 2, Note 4}	dBm/95.04 MHz	-56.41			

Note 1:	Void
Note 2:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	Void
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 7:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.5.5.12.1.2 Test Requirements

The UE performs RACH-less based PSCell activation. UE shall transmit the SR on PUCCH for PSCell at latest 65 ms^{Note1} into T2.

The UE shall send at least one PUSCH on PSCell during T3.

The UE shall stop transmit PUSCH for PSCell in at latest 20 ms into T4.

All the above test requirements shall be fulfilled for the observed PSCell activation delay and PSCell deactivation delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 7.38 in TS 36.133 [15]:

$$T_{\text{activation_time}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search}} + T_{\Delta} + T_{\text{IU}} + 2 \text{ ms}$$

Where:

$$T_{\text{RRC_delay}} = 20\text{ms}$$

$$T_{\text{processing}} = 5\text{ms}$$

$$T_{\text{search}} = 0 \text{ ms}$$

$$T_{\Delta} = 20\text{ms}$$

$$T_{\text{IU}} = \max 20 \text{ ms}$$

A.5.5.13 Conditional PSCell addition and release delay

A.5.5.13.1 Addition and Release Delay of NR PSCell

A.5.5.13.1.1 Test purpose and environment

The purpose of this test is to verify that the conditional NR PSCell addition and release delays under EN-DC are within the requirements stated in clause 8.9A.2.

Supported test configurations are shown in A.5.5.13.1.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.2-1. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.5.5.13.1.1-2, cell-specific parameters in A.5.5.13.1.1-3 and OTA parameters in A.5.5.13.1.1-4 below. The test consists of four successive time periods with duration of T1, T2, T3 and T4. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (E-UTRA

PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (NR PSCell) on radio channel 2. The UE is only monitoring the PCC.

During T1 only Cell 1 is known to the UE. NR shall configure a condition implying PSCell addition (Cell 2) during T1, at a time earlier than $T_{\text{RRC_delay}}$ before the beginning of T2.

Starting T2, Cell 2 becomes detectable. The point in time at which the UE has sent PRACH to the PSCell (Cell 2) defines the start of period T3. The test system shall observe the periodic reporting of CSI for PSCell during T3.

The test system shall send a RRC message to the UE to release PSCell (Cell 2) on radio channel 2. The RRC message to release PSCell (Cell2) shall be sent to the UE during period T3, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to release PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

Table A.5.5.13.1.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	LTE FDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
2	LTE TDD, NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.13.1.1-2: General Test Parameters for Conditional PSCell Addition and Release

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell
Initial Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-118	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	s	0	
DRX			OFF	Continuous monitoring of primary cell
Gap pattern ID			gp0	
PRACH configuration on cell2			FR2 configuration 2	Captured in A.3.8.3.2
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.
T2		s	<7	During this time the UE adds the PSCell.
T3		s	1	During this time the UE sends CSI reports for PSCell.
T4		s	1	During this time the UE releases the PSCell.

Table A.5.5.13.1.1-3: Cell Specific Parameters for Conditional PSCell Addition and Release

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA Channel Number		1,2	1			
NR Channel Number		1,2	2			
Duplex Mode		1,2	TDD			

TDD configuration		1,2	TDDConf.3.1
BW_{channel}	MHz	1,2	100: $N_{RB,c} = 66$
Data RBs allocated		1,2	48
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1
TRS Configuration		1	TRS.2.1 TDD
PDSCH/PDCCH TCI state		1	TCI.State.2
PDSCH Reference measurement channel		1,2	SR.3.3 TDD
RMSI CORESET Reference Channel		1,2	CR.3.2 TDD
Dedicated CORESET Reference Channel		1,2	CCR.3.7 TDD
OCNG Patterns		1,2	OP.3
SSB configuration		1,2	SSB.2 FR2
SMTC configuration		1,2	SMTC.2
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120
TRS Configuration		1,2	TRS.2.1 TDD
CSI-RS configuration for CSI reporting		1,2	CSI-RS.3.1 TDD
reportConfigType		1,2	periodic
reportQuantity		1,2	cri-RI-PMI-CQI
CSI reporting periodicity	slot	1,2	40
CSI reporting offset	slot	1,2	4
EPRE ratio of PSS to SSS	dB	1,2	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation condition		1,2	No external noise (Note 1)
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].			

Table A.5.5.13.1.1-4: OTA related test parameters

Parameter	Unit	Cell 2			
		T1	T2	T3	T4
Angle of arrival configuration		Setup 2a according to clause A.3.15.2.1			
Assumption for UE beams ^{Note 6}		Rough			
$\hat{E}_s$ ^{Note2}	dBm/SCS	$-\infty$		-81	
SSB RP ^{Note2, Note 4}	dBm/SCS	$-\infty$		-81	
$\hat{E}_s / I_{ot_BB}$ ^{Note 2, Note 7}	dB	$-\infty$		4.88	
I_0 ^{Note 2, Note 4}	dBm/95.04 MHz	N/A		-56.41	

Note 1:	Void
Note 2:	Es/lot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	Void
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 7:	Calculation of Es/lot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.5.5.13.1.2 Test Requirements

$T_{RRC_delay} + T_{Event_DU}$ occurs during T1 as the PSCell addition condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall transmit the PRACH to PSCell (Cell 2) less than $T_{config_PSCell_Addition_Conditional}$ ^{Note1} into T2.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T3.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T3

The UE shall stop sending CSI reports for PSCell in at latest 20 ms into T4.

All the above test requirements shall be fulfilled for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay during T2 can be expressed as follows:

$$T_{config_PSCell_Addition_Conditional} = T_{measure} + T_{UE_preparation} + T_{processing} + T_{\Delta} + T_{PSCell_DU} + 2 \text{ ms}$$

Where:

$$T_{measure} = 6720\text{ms for power class 1 or } 4160 \text{ for power class 2/3/4}$$

$$T_{UE_preparation} = 10\text{ms}$$

$$T_{processing} = 40\text{ms}$$

$$T_{\Delta} = 20\text{ms}$$

$$T_{PSCell_DU} = 1*10+10 = 20 \text{ ms}$$

A.5.5.13.2 E-UTRAN – NR FR2 interruptions during measurements on deactivated NR PSCell

A.5.5.13.2.1 Test Purpose and Environment

The purpose of this test is to verify that for E-UTRAN PCell interruptions during the measurement on the deactivated NR PSCell, the UE missed ACK/NACK does not exceed the limits. This test will verify the missed ACK/NACK rate for LTE PCell in EN-DC specified in TS36.133 clause 7.32.2.20. Supported test configurations are shown in table A.5.5.13.2.1-1.

The general test parameters are given in Table A.5.5.13.2.1-2, and NR cell specific test parameters are given in Table A.5.5.13.2.1-3 and A.5.5.13.2.1-4 below. The E-UTRAN cell specific test parameters can be found in Table A.3.7.2.1-2. In the test there are two cells: Cell1 and Cell2. Cell1 is LTE PCell, Cell2 is NR FR2 deactivated PSCell,

respectively. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCyclePSCell* for the deactivated NR PSCell and NR PSCell deactivation command is received by the UE, defines the start of time period T1. During T1, LTE PCell is continuously scheduled in DL. UE is configured with RRM and bfd-and-RLM measurements on the deactivated Cell2.

Table A.5.5.13.2.1-1: Interruption during measurements on deactivated NR PSCell supported test configurations

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.5.5.13.2.1-2: General test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated NR PSCell

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	One is E-UTRAN RF channel and the other two are NR RF channels
Active PCell		Cell1	PCell on E-UTRAN RF channel number 1.
Configured PSCell		Cell2	PSCell on NR RF channel number 2.
CP length		Normal	Applicable to cell1 and cell 2
DRX		OFF	
Measurement gap pattern Id		OFF	
PSCell measurement cycle (<i>measCyclePSCell</i>)	Ms	640	
T1	S	10	

Table A.5.5.13.2.1-3: NR cell specific test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated NR PSCell

Parameter		Unit	Cell 2
Frequency Range			FR2
Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		TDDConf.3.1
BW _{channel}	Config 1,2	MHz	100: N _{RB,c} = 66
Data RBs allocated	Config 1,2		66
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD
PDCCH CORESET parameters	Config 1,2		CCR 3.1 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2		SSB.1 FR2
SMTc Configuration	Config 1,2		SMTc.1
TRS configuration	Config 1,2		TRS.2.1 TDD
TCI state	Config 1,2		TCI.State.0

EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Time offset to cell1 ^{Note 2}	μs	3
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: Receive time difference of signals received between subframe timing boundary of E-UTRA PCell and slot timing boundary of PSCell including time alignment error between the two cells		

Table A.5.13.2.1-4: NR cell specific OTA related test parameters for E-UTRAN – NR FR2 interruptions during measurements on deactivated NR PSCell

Parameter		Unit	Cell 2
Angle of arrival configuration			Setup 1 defined in clause A.3.15.1
Assumption for UE beams ^{Note 6}			Fine
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/15kHz	-111.7
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/SCS ^{Note3}	-102.7
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
SSB_RP ^{Note2}	NR_TDD_FR2_A	dBm/SCS ^{Note4}	-90.7
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s/I_{ot}$	NR_TDD_FR2_A	dB	12
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s/N_{oc}$	NR_TDD_FR2_A	dB	12
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		

Io ^{Note2}	NR_TDD_FR2_A	dBm/95.04 MHz Note4	-61.45
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			

A.5.5.13.2.2 Test Requirements

The UE shall be continuously scheduled in Cell1 during the entire length of T1 and the UE is configured with RRM and RLM/BFD measurements on the deactivated Cell2. During the time duration T1 the UE shall transmit at least [98.5%] of ACK/NACK on E-UTRAN PCell. The UE is only allowed to cause interruptions immediately before and immediately after an SMTC. Each interruption shall not exceed 1 subframe for synchronous inter-band EN-DC.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.6 Measurement procedure

A.5.6.1 Intra-frequency Measurements

A.5.6.1.1 EN-DC event triggered reporting test without gap under non-DRX

A.5.6.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.5.6.1.1.1-1.

Table A.5.6.1.1.1-1: supported test configurations

Configuration	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.6.1.1.1-2, A.5.6.1.1.1-3 and A.5.6.1.1.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

Table A.5.6.1.1.1-2: General test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1~4	E-UTRAN PCell (Cell 1) PSCell (Cell 2)	
Neighbour cell		1~4	Cell 3	Cell to be identified.
RF Channel Number		1~4	1: Cell 1 2: Cell 2 and Cell 3	One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell.
SMTC configuration		1~4	SMTC.1	
A3-Offset	dB	1~4	-11	
CP length		1~4	Normal	
Hysteresis	dB	1~4	0	
Time To Trigger	s	1~4	0	
Filter coefficient		1~4	0	L3 filtering is not used
DRX		1~4	OFF	
Time offset between Cell 1 and Cell 2		1~4	3 μ s	Synchronous EN-DC
Time offset between Cell 2 and Cell 3		1~4	3 μ s	Synchronous cells
T1	s	1~4	5	
T2	s	1~4	5	

Table A.5.6.1.1.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1~4	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1~4	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1,2	24		24	
		3,4	48		48	
Intial BWP configuration		1~4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1~4	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1~4	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1~4	SSB		SSB	
PDSCH RMC configuration		1,2	SR.3.2 TDD		N/A	
		3,4	SR.3.3 TDD			
RMSI CORESET RMC configuration		1,2	CR.3.1 TDD		N/A	
		3,4	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1,2	CCR.3.1 TDD		N/A	
		3,4	CCR.3.7 TDD		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1~4	120		120	
OCNG Patterns		1~4	OP.5		N/A	
TRS configuration		1~4	TRS.2.1 TDD		N/A	

PDSCH/PDCCH TCI state		1~4	TCI.State.2	N/A
cellIndividualOffset	dB	1~4	N/A	16
SSB configuration		1, 2	SSB.3 FR2	SSB.7 FR2
		3, 4	SSB.4 FR2	SSB.8 FR2
Propagation Condition		1~4	No external noise (Note 1)	No external noise (Note 1)
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

Table A.5.6.1.1.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		1~4	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Assumption for UE beams ^{Note 4}		1~4	Rough		Rough	
	dBm/SCS	1, 2	-89	-89	-Infinity	-89
		3, 4	-86	-86	-Infinity	-86
$\hat{E}_s/I_{ot_BB}$ ^{Note 5}	dB	1~4	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1, 2	-89	-89	-Infinity	-89
		3, 4	-86	-86	-Infinity	-86
I_o	dBm/95.04MHz	1,2	-64.41	-64.41	-Infinity	-64.41
		3,4	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1~4	Defined in Figure A.5.6.1.1.1-1			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Void						
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.						
Note 5: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.						

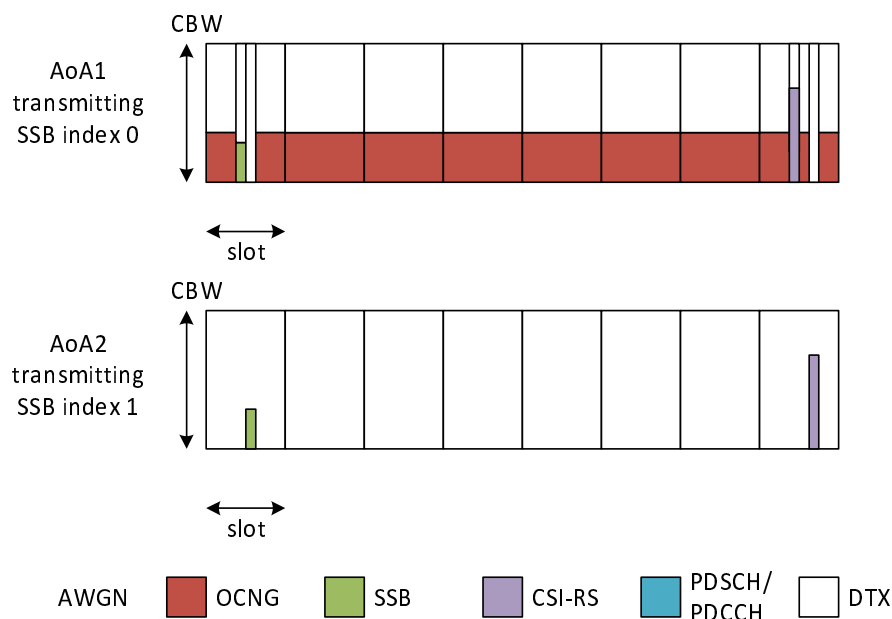


Figure A.5.6.1.1.1-1: Time multiplexed downlink transmissions (Config 1,2 example)

A.5.6.1.1.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 2.4s for a UE supporting power class 1,
- 1.44s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{TTIDCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.1.2 EN-DC event triggered reporting test without gap under DRX

A.5.6.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.5.6.1.2.1-1.

Table A.5.6.1.2.1-1: supported test configurations

Configuration	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

4	LTE TDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.6.1.2.1-2 ~ Table A.5.6.1.2.1-6 below.

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.1.2.1-2: General test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap with DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1~4	E-UTRAN PCell (Cell 1) PSCell (Cell 2)		
Neighbour cell		1~4	Cell 3		Cell to be identified.
RF Channel Number		1~4	1: Cell 1 2: Cell 2 and Cell 3		One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell.
SMTC configuration		1~4	SMTC.1		
A3-Offset	dB	1~4	-6		
CP length		1~4	Normal		
Hysteresis	dB	1~4	0		
Time To Trigger	s	1~4	0		
Filter coefficient		1~4	0		L3 filtering is not used
DRX		1~4	DRX.1	DRX.7	DRX related parameters are defined in Table A.5.6.1.2.1-4
Time offset between Cell 1 and Cell 2		1~4	3 μ s		Synchronous EN-DC
Time offset between Cell 2 and Cell 3		1~4	3 μ s		Synchronous cells
T1	s	1~4	5		
T2	s	1~4	10	52	

Table A.5.6.1.2.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap with DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1~4	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1~4	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1~4	66		66	
Initial BWP configuration		1~4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1~4	DLBWP.1.1		DLBWP.1.1	

Active UL BWP configuration		1~4	ULBWP.1.1	ULBWP.1.1
RLM-RS		1~4	SSB	SSB
PDSCH RMC configuration		1,2	SR.3.2 TDD	N/A
		3,4	SR.3.3 TDD	
RMSI CORESET RMC configuration		1,2	CR.3.1 TDD	N/A
		3,4	CR.3.2 TDD	N/A
Dedicated CORESET RMC configuration		1,2	CCR.3.1 TDD	N/A
		3,4	CCR.3.7 TDD	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1~4	120	120
OCNG Patterns		1~4	OP.1	OP.1
PDSCH/PDCCH TCI state		1~4	TCI.State.2	N/A
CSI-RS for tracking			TRS.2.1 TDD	N/A
			TRS.2.1 TDD	N/A
SSB configuration		1, 2	SSB.3 FR2	SSB.3 FR2
		3, 4	SSB.4 FR2	SSB.4 FR2
Propagation Condition		1~4	AWGN	AWGN

Table A.5.6.1.2.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 without gap with DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		1~4	Setup 1 defined in A.3.15.1			
Assumption for UE beams ^{Note 4}		1~4	Rough		Rough	
$\hat{E}_s/I_{ot}$ ^{BB Note 5}	dB	1~4	3.77	-1.52	-Infinity	-1.52
N_{oc} ^{Note 2}	dBm/15 KHz	1~4	-98			
N_{oc} ^{Note 2}	dBm/SCS	1, 2	-89			
		3, 4	-86			
SSB_RP	dBm/SCS	1, 2	-85	-85	-Infinity	-85
		3, 4	-82	-82	-Infinity	-82
$\hat{E}_s/N_{oc}$	dB	1~4	4	4	-Infinity	4
I_o	dBm/95.04MHz	1~4	-54.53	-52.18	See Cell 2 columns	
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.					
Note 5:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.					

A.5.6.1.2.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 7.2s for a UE supporting power class 1,
- 4.32s for a UE supporting power class 2, 3 and 4

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.2s for a UE supporting power class 1,
- 30.72s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.1.3 EN-DC event triggered reporting test with per-UE gaps under non-DRX

A.5.6.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.5.6.1.3.1-1.

Table A.5.6.1.3.1-1: supported test configurations

Configuration	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.6.1.3.1-2 ~ 4 below.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

Table A.5.6.1.3.1-2: General test parameters for intra-frequency event triggered reporting for EN-DC with TDD PCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Value	Comment
-----------	------	--------	-------	---------

Active cell		1~4	E-UTRAN PCell (Cell 1) PSCell (Cell 2)	
Neighbour cell		1~4	Cell 3	Cell to be identified.
RF Channel Number		1~4	1: Cell 1 2: Cell 2 and Cell 3	One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell.
Gap type		1~4	Per-UE gaps	
Measurement gap repetition periodicity	ms	1~4	40	
Measurement gap length	ms	1~4	6	
Measurement gap offset	ms	1~4	39	
SMTC configuration		1~4	SMTC.1	
CSI-RS parameters		1~4	CSI-RS.3.2 TDD resource #0	Resource #1 is not used
A3-Offset	dB	1~4	-11	
CP length		1~4	Normal	
Hysteresis	dB	1~4	0	
Time To Trigger	s	1~4	0	
Filter coefficient		1~4	0	L3 filtering is not used
DRX		1~4	OFF	
Time offset between Cell 1 and Cell 2		1~4	3 μ s	Synchronous EN-DC
Time offset between Cell 2 and Cell 3		1~4	3 μ s	Synchronous cells
T1	s	1~4	5	
T2	s	1~4	5	

Table A.5.6.1.3.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1~4	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1~4	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1,2	24		24	
		3,4	48		48	
Intial BWP configuration		1~4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2	DLBWP.1.2		DLBWP.1.1	
		3,4	DLBWP.1.7		DLBWP.1.1	
Active UL BWP configuration		1,2	ULBWP.1.2		ULBWP.1.1	
		3,4	ULBWP.1.7		ULBWP.1.1	
RLM-RS		1~4	CSI-RS		SSB	
PDSCH RMC configuration		1,2	SR.3.2 TDD		N/A	
		3,4	SR.3.3 TDD			
RMSI CORESET RMC configuration		1,2	CR.3.1 TDD		N/A	
		3,4	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1,2	CCR.3.1 TDD		N/A	
		3,4	CCR.3.7 TDD		N/A	
TRS configuration		1~4	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state		1~4	TCI.State.2		N/A	

PDSCH/PDCCH subcarrier spacing	kHz	1~4	120	120
OCNG Patterns		1~4	OP.5	N/A
cellIndividualOffset	dB	1~4	N/A	16
SSB		1, 2	SSB.3 FR2	SSB.7 FR2
		3, 4	SSB.4 FR2	SSB.8 FR2
Propagation Condition		1~4	No external noise (Note 1)	No external noise (Note 1)
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

Table A.5.6.1.3.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		1~4	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Assumption for UE beams ^{Note 4}		1~4	Rough		Rough	
E _s	dBm/SCS	1, 2	-89	-89	-Infinity	-89
		3, 4	-86	-86	-Infinity	-86
$\hat{E}_s/I_{ot_BB}$ ^{Note 5}	dB	1~4	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1, 2	-89	-89	-Infinity	-89
		3, 4	-86	-86	-Infinity	-86
I _o	dBm/95.04MHz	1,2	-64.41	-64.41	-Infinity	-64.41
		3,4	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1~4	Defined in Figure A.5.6.1.3.1-1			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Void						
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.						
Note 5: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.						

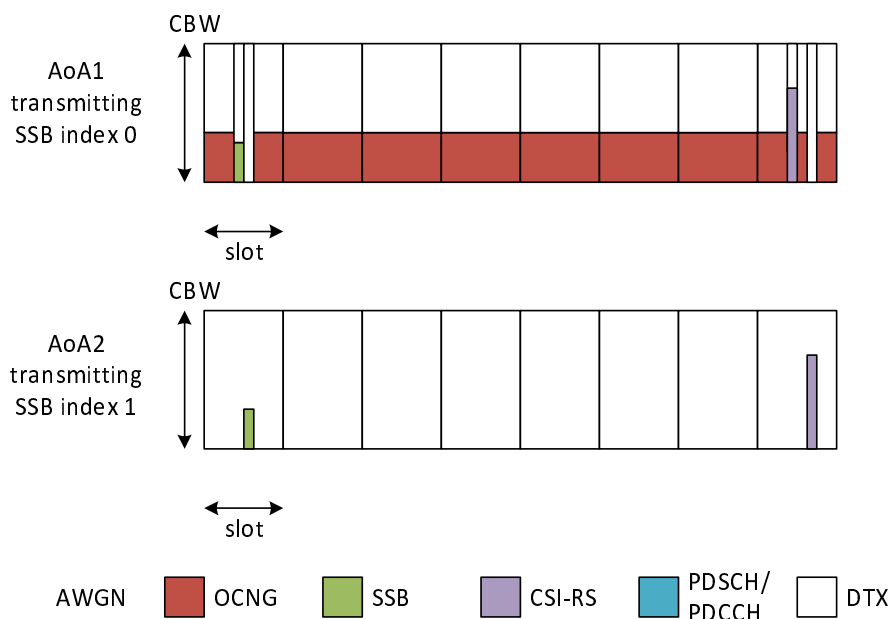


Figure A.5.6.1.3.1-1: Time multiplexed downlink transmissions (Config 1,2 example)

A.5.6.1.3.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 3.2s for a UE supporting power class 1,
- 1.92s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.1.4 EN-DC event triggered reporting test with per-UE gaps under DRX

A.5.6.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.5.6.1.4.1-1.

Table A.5.6.1.4.1-1: supported test configurations

Configuration	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

4	LTE TDD, 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations.

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.6.1.4.1-2 ~ 6.

During the test, Cell 2 and Cell 3 are transmitted from the direction determined according to A3.8.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.1.4.1-2: General test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1~4	E-UTRAN PCell (Cell 1) PSCell (Cell 2)		
Neighbour cell		1~4	Cell 3		Cell to be identified.
RF Channel Number		1~4	1: Cell 1 2: Cell 2 and Cell 3		One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell.
Gap type		1~4	Per-UE gaps		
Measurement gap repetition periodicity	ms	1~4	40		
Measurement gap length	ms	1~4	6		
Measurement gap offset	ms	1~4	39		
SMTC configuration		1~4	SMTC.1		
CSI-RS parameters		1~4	CSI-RS.3.2 TDD resource #0		Resource #1 is not used
A3-Offset	dB	1~4	-6		
CP length		1~4	Normal		
Hysteresis	dB	1~4	0		
Time To Trigger	s	1~4	0		
Filter coefficient		1~4	0		L3 filtering is not used
DRX		1~4	DRX.1	DRX.7	DRX related parameters are defined in Table A.5.6.1.4.1-5
Time offset between Cell 1 and Cell 2		1~4	3 μ s		Synchronous EN-DC
Time offset between Cell 2 and Cell 3		1~4	3 μ s		Synchronous cells
T1	s	1~4	5		
T2	s	1~4	10	52	

Table A.5.6.1.4.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1~4	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1~4	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1~4	66		66	
Intial BWP configuration		1~4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1~4	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1~4	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1~4	CSI-RS		SSB	
PDSCH RMC configuration		1,2	SR.3.2 TDD		N/A	
		3,4	SR.3.3 TDD			
RMSI CORESET RMC configuration		1,2	CR.3.1 TDD		N/A	
		3,4	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1,2	CCR.3.1 TDD		N/A	
		3,4	CCR.3.7 TDD		N/A	
TRS configuration		1~4	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state		1~4	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1~4	120		120	
OCNG Patterns		1~4	OP.1		OP.1	
SSB		1, 2	SSB.3 FR2		SSB.3 FR2	
		3, 4	SSB.4 FR2		SSB.4 FR2	
Propagation Condition		1~4	AWGN		AWGN	

Table A.5.6.1.4.1-4: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with TDD PSCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		1~4	Setup 1 defined in A.3.15.1			
Assumption for UE beams ^{Note 4}		1~4	Rough		Rough	
$\hat{E}_s / I_{\text{ot}}$ ^{BB Note 5}	dB	1~4	3.77	-1.52	-Infinity	-1.52
N_{oc} ^{Note 2}	dBm/15 KHz	1~4	-98			
N_{oc} ^{Note 2}	dBm/SCS	1, 2	-89			
		3, 4	-86			
SSB_RP	dBm/SCS	1, 2	-85	-85	-Infinity	-85
		3, 4	-82	-82	-Infinity	-82
$\hat{E}_s / N_{oc}$	dB	1~4	4	4	-Infinity	4
I_o	dBm/95.04MHz	1~4	-54.53	-52.18	See Cell 2 columns	

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
Note 5:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

Table A.5.6.1.4.1-5: Void**Table A.5.6.1.4.1-6: Void**

A.5.6.1.4.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 7.2s for a UE supporting power class 1,
- 4.32s for a UE supporting power class 2, 3 and 4

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.20s for a UE supporting power class 1,
- 30.72s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2 Inter-frequency Measurements

A.5.6.2.1 EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is not used

A.5.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.1.1-1, A.5.6.2.1.1-2, and A.5.6.2.1.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.1.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table A.5.6.2.1.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.2-1. Supported test configurations are shown in table A.5.6.2.1.1-1.

Table A.5.6.2.1.1-1 EN-DC event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.5.6.2.1.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN TDD carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2		Two FR2 NR carrier frequencies are used.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	39	39	
SMTC-SSB parameters		Config 1,2	SSB.3 FR2		As specified in clause A.3.10.2
offsetMO	dB	Config 1,2	16		Applied to NR Cell 3 measurement object
A3-Offset	dB	Config 1,2	-11		
Hysteresis	dB	Config 1,2	0		
CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	OFF		DRX is not used
Time offset between PCell and PScell		Config 1,2	3 μ s		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μ s		Synchronous cells.
T1	s	Config 1,2	5		

T2	s	Config 1,2	5.2 for PC1; 3.5 for other PC	5.2 for PC1; 3.5 for other PC	
----	---	------------	-------------------------------	-------------------------------	--

Table A.5.6.2.1.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2	Setup 3 as specified in clause A.3.15			
			AoA1		AoA2	
Assumption for UE beams ^{Note 7}		Config 1,2	Rough		Rough	
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
BW _{channel}	MHz	Config 1,2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		Config 1,2	66		66	
BWP BW	MHz	Config 1,2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns defined in A.3.2.1.1		Config 1,2	OP.1		OP.1	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
PDSCH/PDCCH TCI state		Config 1,2	TCI.State.2		NA	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
RMSI CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
Dedicated CORESET Reference Channel		Config 1,2	CCR.3.1 TDD		-	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	
EPRE ratio of PSS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						

EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
$\hat{E}_s$	dBm/SC S	Config 1,2	-87	-87	-Infinity	-87
SSBRP ^{Note 3}	dBm/SC S ^{Note5}	Config 1,2	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot_BB}$ ^{Note 8}	dB	Config 1,2	1.89	1.89	-Infinity	1.89
I_o ^{Note3}	dBm/95.0 4 MHz ^{Note5}	Config 1,2	-58.01	-58.01	-Infinity	-58.01
Propagation Condition		Config 1,2	No external noise (Note 9)		No external noise (Note 9)	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: SSBRP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Void Note 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone. Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation. Note 8: Calculation of E_s/I_{ot_BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_s from TS 38.101-2 [19] Table 6.2.1.3-4. Note 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].						

A.5.6.2.1.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.2 EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is used

A.5.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.2.1-1, A.5.6.2.2.1-2, and A.5.6.2.2.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.2.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table A.5.6.2.2.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #13, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.2-1. Supported test configurations are shown in table A.5.6.2.2.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.2.2.1-1 EN-DC event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.5.6.2.2.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2	1				One E-UTRAN TDD carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2				Two FR2 NR carrier frequencies are used.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3				NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0		13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	39		39		
SMTC-SSB parameters		Config 1,2	SSB.3 FR2				As specified in clause A.3.10.2
A3-Offset	dB	Config 1,2	-6				
Hysteresis	dB	Config 1,2	0				
CP length		Config 1,2	Normal				
TimeToTrigger	s	Config 1,2	0				
Filter coefficient		Config 1,2	0				L3 filtering is not used
DRX		Config 1,2	DRX 1	DRX 7	DRX 1	DRX 7	As specified in clause A.3.3

Time offset between PCell and PSCell		Config 1,2	3 μ s				Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μ s				Synchronous cells.
T1	s	Config 1,2	5				
T2	s	Config 1,2	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table A.5.6.2.2.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2	Setup 1 as specified in clause A.3.15			
Assumption for UE beams ^{Note 7}		Config 1,2	Rough		Rough	
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
BW _{channel}	MHz	Config 1,2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		Config 1,2	66		66	
BWP BW	MHz	Config 1,2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	ULBWP.0.1			
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns defined in A.3.2.1.1		Config 1,2	OP.1		OP.1	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
PDSCH/PDCCH TCI state		Config 1,2	TCI.State.2		NA	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
RMSI CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
Dedicated CORESET Reference Channel		Config 1,2	CCR.3.1 TDD		-	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	
EPRE ratio of PSS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS						

EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15k Hz ^{Note5}		-104.7		-104.7	
N_{oc} ^{Note2}	dBm/SC S ^{Note4}	Config 1,2	-95.7		-95.7	
SS-RSRP ^{Note 3}	dBm/SC S ^{Note5}	Config 1,2	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s / I_{ot}$	dB	Config 1,2	6	6	-Infinity	9
$\hat{E}_s / N_{oc}$	dB	Config 1,2	6	6	-Infinity	9
I_o ^{Note3}	dBm/95.0 4 MHz ^{Note5}	Config 1,2	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1,2	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Void						
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.5.6.2.2.2 Test Requirements

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.3 EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is not used

A.5.6.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.3.1-1, A.5.6.2.3.1-2, and A.5.6.2.3.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.3.1-1 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table A.5.6.2.3.1-1 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #13, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.2-1. Supported test configurations are shown in table A.5.6.2.3.1-1.

Table A.5.6.2.3.1-1 EN-DC event triggered reporting tests with SSB index reading for FR2-FR2

Config	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.5.6.2.3.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN TDD carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2		Two FR2 NR carrier frequencies are used.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PSCell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	39	39	
SMTC-SSB parameters		Config 1,2	SSB.3 FR2		As specified in clause A.3.10.2

offsetMO	dB	Config 1,2	16	Applied to NR Cell 3 measurement object
A3-Offset	dB	Config 1,2	-11	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between PCell and PSCell		Config 1,2	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μ s	Synchronous cells.
T1	s	Config 1,2	5	
T2	s	Config 1,2	7 for PC1; 4.5 for other PC	7 for PC1; 4.5 for other PC

Table A.5.6.2.3.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2	Setup 3 as specified in clause A.3.15			
			AoA1		AoA2	
Assumption for UE beams ^{Note 7}		Config 1,2	Rough		Rough	
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
BW _{channel}	MHz	Config 1,2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		Config 1,2	66		66	
BWP BW	MHz	Config 1,2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	DLBWP.0.1		N/A	
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns defined in A.3.2.1.1		Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
RMSI CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
Dedicated CORESET Reference Channel		Config 1,2	CCR.3.1 TDD		-	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
PDSCH/PDCCH TCI state		Config 1,2	TCI.State.2		NA	

SMTC configuration defined in A.3.11		Config 1,2	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	
EPRE ratio of PSS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
$\hat{E}_s$	dBm/SC S					
SSBRP ^{Note 3}	dBm/SC S ^{Note5}	Config 1,2	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$ ^{BB Note 8}	dB	Config 1,2	1.89	1.89	-Infinity	1.89
I_o ^{Note3}	dBm/95.0 4 MHz ^{Note5}	Config 1,2	-58.01	-58.01	-Infinity	-58.01
Propagation Condition		Config 1,2	No external noise (Note 9)		No external noise (Note 9)	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: SSBRP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Void Note 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 8: Calculation of $E_s/I_{ot_{BB}}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_s from TS 38.101-2 [19] Table 6.2.1.3-4. Note 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].						

A.5.6.2.3.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.4 EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is used

A.5.6.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.4.1-1, A.5.6.2.4.1-2, and A.5.6.2.4.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.4.1-2 is provided for UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table A.5.6.2.4.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #13, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.2-1. Supported test configurations are shown in table A.5.6.2.4.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.2.4.1-1: EN-DC event triggered reporting tests with SSB index reading for FR2-FR2

Config	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.5.6.2.4.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2	1				One E-UTRAN TDD carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2				Two FR2 NR carrier frequencies are used.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PSCell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.

Neighbour cell		Config 1,2	NR cell 3				NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0		13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	39		39		
SMTC-SSB parameters		Config 1,2	SSB.3 FR2				As specified in clause A.3.10.2
A3-Offset	dB	Config 1,2	-6				
Hysteresis	dB	Config 1,2	0				
CP length		Config 1,2	Normal				
TimeToTrigger	s	Config 1,2	0				
Filter coefficient		Config 1,2	0				L3 filtering is not used
DRX		Config 1,2	DRX .1	DRX .7	DRX .1	DRX .7	As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2	3 μ s				Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μ s				Synchronous cells.
T1	s	Config 1,2	5				
T2	s	Config 1,2	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	

Table A.5.6.2.4.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2	Setup 1 as specified in clause A.3.15			
Assumption for UE beams ^{Note 7}		Config 1,2	Rough		Rough	
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
BW _{channel}	MHz	Config 1,2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		Config 1,2	66		66	
BWP BW	MHz	Config 1,2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	ULBWP.0.1			
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns defined in A.3.2.1.1		Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
RMSI CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
Dedicated CORESET Reference Channel		Config 1,2	CCR.3.1 TDD		-	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
PDSCH/PDCCH TCI state		Config 1,2	TCI.State.2		NA	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.1		SMTC.1	

PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	
EPRE ratio of PSS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz Note5		-104.7		-104.7	
N_{oc} ^{Note2}	dBm/S CS Note4	Config 1,2	-95.7		-95.7	
SSB_RP ^{Note 3}	dBm/S CS Note5	Config 1,2	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s / I_{ot}$	dB	Config 1,2	6	6	-Infinity	9
$\hat{E}_s / N_{oc}$	dB	Config 1,2	6	6	-Infinity	9
I_o ^{Note3}	dBm/95 .04 MHz Note5	Config 1,2	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1,2	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Void						
Note 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone						
Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.5.6.2.4.2 Test Requirements

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $X2$ ms from the beginning of time period T2, where $X2$ is

107520 for UE supporting power class 1, or

66560 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.5 EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is not used

A.5.6.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.5.1-1, A.5.6.2.5.1-2, and A.5.6.2.5.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.5.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table A.5.6.2.5.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #13, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.5.6.2.5.1-1.

Table A.5.6.2.5.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.5.6.2.5.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test	Value	Comment
-----------	------	------	-------	---------

		configuration	Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN TDD carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		One FR1 and one FR2 NR carrier frequency is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	39	39	
SMTC-SSB parameters on NR RF Channel 1		Config 1,4	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2,5	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3,6	SSB.2 FR1		As specified in clause A.3.10.1
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3,4,5,6	SSB.3 FR2		As specified in clause A.3.10.2
CSI-RS for tracking		Config 1,4	TRS.1.1 FDD		
		Config 2,5	TRS.1.1 TDD		
		Config 3,6	TRS.1.2 TDD		
<i>offsetMO</i>	dB	Config 1,2,3,4,5,6	6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
<i>a4-Threshold</i>	dBm	Config 1,2,3,4,5,6	-105		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF		DRX is not used
Time offset between PCell and PScell		Config 1,2,3,4,5,6	3 μ s		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3 μ s		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	5.2 for PC1; 3.5 for other PC	5.2 for PC1; 3.5 for other PC	

Table A.5.6.2.5.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2

AoA setup		Config 1,2,3,4,5,6	NA	Setup 1 as specified in clause A.3.15
Assumption for UE beams ^{Note 7}		Config 1,2,3,4,5,6	N/A	Rough
NR RF Channel Number		Config 1,2,3,4,5,6	1	2
Duplex mode		Config 1,4	FDD	TDD
		Config 2,3,5,6	TDD	TDD
BW _{channel}	MHz	Config 1,4	10: N _{RB,c} = 52	100: N _{RB,c} = 66
		Config 2,5	10: N _{RB,c} = 52	100: N _{RB,c} = 66
		Config 3,6	40: N _{RB,c} = 106	100: N _{RB,c} = 66
BWP BW	MHz	Config 1,4	10: N _{RB,c} = 52	100: N _{RB,c} = 66
		Config 2,5	10: N _{RB,c} = 52	100: N _{RB,c} = 66
		Config 3,6	40: N _{RB,c} = 106	100: N _{RB,c} = 66
Data RBs allocated		Config 1,4	52	66
		Config 2,5	52	66
		Config 3,6	106	66
TDD configuration		Config 2,5	TDDConf.1.1	TDDConf.3.1
		Config 3,6	TDDConf.2.1	TDDConf.3.1
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1	NA
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1	NA
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1	NA
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1	OP.1
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD	-
		Config 2,5	SR.1.1 TDD	
		Config 3,6	SR.2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD	-
		Config 2,5	CR.1.1 TDD	
		Config 3,6	CR.2.1 TDD	
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD	-
		Config 2,5	CCR.1.1 TDD	
		Config 3,6	CCR.2.1 TDD	
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2	SMTC.2
		Config 2,3,5,6	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15	120
		Config 3,6	30	120
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				

EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
$\hat{E}_s$	dBm/S CS	Config 1,2,3,4,5,6	Link only, see clause A.3.7A	-Infinity	-87
SSB_RP ^{Note 3}	dBm/S CS Note5	Config 1,2,3,4,5,6		-Infinity	-87
$\hat{E}_s/I_{ot\ BB}$ ^{Note 8}	dB	Config 1,2,3,4,5,6		-Infinity	14.69
I_o ^{Note3}	dBm/95 .04 MHz Note5	Config 1,2,3,4,5,6		-Infinity	-58.01
Propagation Condition		Config 1,2,3,4,5,6		No external noise (Note 9)	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Void Note 5: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 6: As observed with 0dBi gain antenna at the centre of the quiet zone Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 8: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_s from TS 38.101-2 [19] Table 6.2.1.3-4. Note 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].					

A.5.6.2.5.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.6 EN-DC event triggered reporting tests for FR2 cell without SSB time index detection when DRX is used

A.5.6.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.6.1-1, A.5.6.2.6.1-2, and A.5.6.2.6.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.6.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table A.5.6.2.6.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #13, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.5.6.2.6.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.2.6.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.5.6.2.6.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1				One E-UTRAN TDD carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2				One FR1 and one Fr2 NR carrier frequency is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3				NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0		13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	39		39		
SMTC-SSB parameters on NR RF		Config 1,4	SSB.1 FR1				As specified in clause A.3.10.1
		Config 2,5	SSB.1 FR1				As specified in clause A.3.10.1

Channel 1		Config 3,6	SSB.2 FR1				As specified in clause A.3.10.1
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3,4,5,6	SSB.3 FR2				As specified in clause A.3.10.2
CSI-RS for tracking		Config 1,4	TRS.1.1 FDD				
		Config 2,5	TRS.1.1 TDD				
		Config 3,6	TRS.1.2 TDD				
offsetMO	dB	Config 1,2,3,4,5,6	6				
Hysteresis	dB	Config 1,2,3,4,5,6	0				
a4-Threshold	dBm	Config 1,2,3,4,5,6	-105				
CP length		Config 1,2,3,4,5,6	Normal				
TimeToTrigger	s	Config 1,2,3,4,5,6	0				
Filter coefficient		Config 1,2,3,4,5,6	0				L3 filtering is not used
DRX		Config 1,2,3,4,5,6	DRX .1	DRX .7	DRX .1	DRX .7	As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μ s				Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms				Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3 μ s				Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5				
T2	s	Config 1,2,3,4,5,6	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table A.5.6.2.6.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6	NA		Setup 1 as specified in clause A.3.15	
Assumption for UE beams ^{Note 7}		Config 1,2,3,4,5,6	N/A		Rough	
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD		TDD	
		Config 2,3,5,6	TDD		TDD	
BW _{channel}	MHz	Config 1,4	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 2,5	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 3,6	40: N _{RB,c} = 106		100: N _{RB,c} = 66	
BWP BW	MHz	Config 1,4	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 2,5	10: N _{RB,c} = 52		100: N _{RB,c} = 66	

		Config 3,6	40: $N_{RB,c} = 106$	100: $N_{RB,c} = 66$	
Data RBs allocated		Config 1,4	52	66	
		Config 2,5	52	66	
		Config 3,6	106	66	
TDD configuration		Config 2,5	TDDConf.1.1	TDDConf.3.1	
		Config 3,6	TDDConf.2.1	TDDConf.3.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1	NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1	NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1	NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1	NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1	OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD	-	
		Config 2,5	SR.1.1 TDD		
		Config 3,6	SR2.1 TDD		
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD	-	
		Config 2,5	CR.1.1 TDD		
		Config 3,6	CR.2.1 TDD		
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD	-	
		Config 2,5	CCR.1.1 TDD		
		Config 3,6	CCR.2.1 TDD		
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2	SMTC.2	
		Config 2,3,5,6	SMTC.1	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15	120	
		Config 3,6	30	120	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2	dBm/15 kHz Note5		NA Link only, see clause A.3.7A	-104.7	
N_{oc} Note2	dBm/S CS Note4	Config 1,2,4,5		-95.7	
		Config 3,6		-95.7	
SSB_RP Note 3	dBm/S CS Note5	Config 1,2,4,5		-Infinity	-86.7
		Config 3,6		-Infinity	-86.7
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6		-Infinity	9

$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	-Infinity	9
I_o ^{Note3}	dBm/9. 36MHz	Config 1,2,4,5	-	-
	dBm/38 .16MHz	Config 3,6	-	-
	dBm/95 .04 MHz Note5	Config 1,2,3,4,5,6	-66.7	-57.2
Propagation Condition		Config 1,2,3,4,5,6	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone				
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.6.2.6.2 Test Requirements

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.7 EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is not used

A.5.6.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.7.1-1, A.5.6.2.7.1-2, and A.5.6.2.7.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.7.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table A.5.6.2.7.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #13, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.5.6.2.7.1-1.

Table A.5.6.2.7.1-1: EN-DC event triggered reporting tests with SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.5.6.2.7.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN TDD carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		One FR1 and one FR2 NR carrier frequency is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	39	39	
SMTC-SSB parameters on NR RF Channel 1		Config 1,4	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2,5	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3,6	SSB.2 FR1		As specified in clause A.3.10.1
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3,4,5,6	SSB.3 FR2		As specified in clause A.3.10.2

CSI-RS for tracking		Config 1,4	TRS.1.1 FDD		
		Config 2,5	TRS.1.1 TDD		
		Config 3,6	TRS.1.2 TDD		
offset MO	dB	Config 1,2,3,4,5,6	6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
a4-Threshold	dBm	Config 1,2,3,4,5,6	-105		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF		DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μ s		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3 μ s		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	7 for PC1; 4.5 for other PC	7 for PC1; 4.5 for other PC	

Table A.5.6.2.7.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6	NA		Setup 1 as specified in clause A.3.15	
Assumption for UE beams ^{Note 7}		Config 1,2,3,4,5,6	N/A		Rough	
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD		TDD	
		Config 2,3,5,6	TDD		TDD	
BW _{channel}	MHz	Config 1,4	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 2,5	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 3,6	40: N _{RB,c} = 106		100: N _{RB,c} = 66	
BWP BW	MHz	Config 1,4	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 2,5	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 3,6	40: N _{RB,c} = 106		100: N _{RB,c} = 66	
Data RBs allocated		Config 1,4	52		66	
		Config 2,5	52		66	
		Config 3,6	106		66	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1		OP.1	

PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD	-	
		Config 2,5	SR.1.1 TDD		
		Config 3,6	SR.2.1 TDD		
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD	-	
		Config 2,5	CR.1.1 TDD		
		Config 3,6	CR.2.1 TDD		
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD	-	
		Config 2,5	CCR.1.1 TDD		
		Config 3,6	CCR.2.1 TDD		
TDD configuration		Config 2,5	TDDConf.1.1	TDDConf.3.1	
		Config 3,6	TDDConf.2.1	TDDConf.3.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1	NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1	NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1	NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1	NA	
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2	SMTC.2	
		Config 2,3,5,6	SMTC.1	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15	120	
		Config 3,6	30	120	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
$\hat{E}_s$	dBm/S CS	Config 1,2,3,4,5,6	Link only, see clause A.3.7A	-Infinity	-87
SSB_RP ^{Note 3}	dBm/S CS ^{Note5}	Config 1,2,3,4,5,6		-Infinity	-87
$\hat{E}_s / I_{ot\ BB}$ ^{Note 8}	dB	Config 1,2,3,4,5,6		-Infinity	14.69
I_{ot} ^{Note3}	dBm/95 .04 MHz ^{Note5}	Config 1,2,3,4,5,6		-Infinity	-58.01
Propagation Condition		Config 1,2,3,4,5,6		No external noise (Note 9)	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Void
Note 3:	SS-B _{RP} , Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 6:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_s from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 9:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].

A.5.6.2.7.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.2.8 EN-DC event triggered reporting tests for FR2 cell with SSB time index detection when DRX is used

A.5.6.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.2.8.1-1, A.5.6.2.8.1-2, and A.5.6.2.8.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.5.6.2.8.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement gap pattern configuration #13 as defined in Table A.5.6.2.8.1-2 is provided for UE that support per-FR gap. If a UE supports per-FR gap and gap pattern configuration #13, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.5.6.2.8.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.2.8.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.5.6.2.8.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1				One E-UTRAN TDD carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2				One FR1 and one FR2 NR carrier frequency is used.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)				LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3				NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6	0		13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	39		39		
SMTC-SSB parameters on NR RF Channel 1		Config 1,4	SSB.1 FR1				As specified in clause A.3.10.1
		Config 2,5	SSB.1 FR1				As specified in clause A.3.10.1
		Config 3,6	SSB.2 FR1				As specified in clause A.3.10.1
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3,4,5,6	SSB.3 FR2				As specified in clause A.3.10.2
CSI-RS for tracking		Config 1,4	TRS.1.1 FDD				
		Config 2,5	TRS.1.1 TDD				
		Config 3,6	TRS.1.2 TDD				
offsetMO	dB	Config 1,2,3,4,5,6	6				
Hysteresis	dB	Config 1,2,3,4,5,6	0				
a4-Threshold	dBm	Config 1,2,3,4,5,6	-105				
CP length		Config 1,2,3,4,5,6	Normal				
TimeToTrigger	s	Config 1,2,3,4,5,6	0				

Filter coefficient		Config 1,2,3,4,5,6	0				L3 filtering is not used
DRX		Config 1,2,3,4,5,6	DRX .1	DRX .7	DRX .1	DRX .7	As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μ s				Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,4	3ms				Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 2,3,5,6	3 μ s				Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5				
T2	s	Config 1,2,3,4,5,6	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	

Table A.5.6.2.8.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6	NA		Setup 1 as specified in clause A.3.15	
Assumption for UE beams ^{Note 7}		Config 1,2,3,4,5,6	N/A		Rough	
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	FDD		TDD	
		Config 2,3,5,6	TDD		TDD	
BW _{channel}	MHz	Config 1,4	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 2,5	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 3,6	40: N _{RB,c} = 106		100: N _{RB,c} = 66	
BWP BW	MHz	Config 1,4	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 2,5	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 3,6	40: N _{RB,c} = 106		100: N _{RB,c} = 66	
Data RBs allocated		Config 1,4	52		66	
		Config 2,5	52		66	
		Config 3,6	106		66	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD		-	
		Config 2,5	SR.1.1 TDD			
		Config 3,6	SR.2.1 TDD			
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD		-	
		Config 2,5	CR.1.1 TDD			
		Config 3,6	CR.2.1 TDD			
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD		-	
		Config 2,5	CCR.1.1 TDD			
		Config 3,6	CCR.2.1 TDD			

TDD configuration		Config 2,5	TDDConf.1.1	TDDConf.3.1	
		Config 3,6	TDDConf.2.1	TDDConf.3.1	
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1	NA	
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1	NA	
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1	NA	
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1	NA	
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2	SMTC.2	
		Config 2,3,5,6	SMTC.1	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15	120	
		Config 3,6	30	120	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} Note2	dBm/15 kHz Note5		NA Link only, see clause A.3.7A	-104.7	
N_{oc} Note2	dBm/S CS Note4	Config 1,2,4,5		-95.7	
		Config 3,6		-95.7	
SSB_RP Note 3	dBm/S CS Note5	Config 1,2,4,5		-Infinity	-86.7
		Config 3,6		-Infinity	-86.7
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6		-Infinity	9
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6		-Infinity	9
I_0 Note3	dBm/9.36MHz	Config 1,2,4,5		-	-
	dBm/38.16MHz	Config 3,6		-	-

	dBm/95 .04 MHz Note5	Config 1,2,3,4,5,6	-66.7	-57.2
Propagation Condition		Config 1,2,3,4,5,6	AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4:	SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			
Note 5:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone			
Note 6:	As observed with 0dBi gain antenna at the centre of the quiet zone			
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			

A.5.6.2.8.2 Test Requirements

In test 1 with per-UE gap and in test 3 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

107520 for UE supporting power class 1, or

66560 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.3 L1-RSRP measurement for beam reporting

A.5.6.3.1 SSB based L1-RSRP measurement when DRX is not used

A.5.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.5.6.3.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.5.6.3.1.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description
--------	-------------

1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.5.6.3.1.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.3.1.2-1 and Table A.5.6.3.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.5.6.3.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1~4		TDD
TDD Configuration	1~4		TDDConf.3.1
BW _{channel}	1~4	MHz	100: N _{RB,c} = 66
Data RBs allocated	1~4		66
PDSCH Reference measurement channel	1,2		SR.3.2 TDD
	3,4		SR.3.3 TDD
RMSI CORESET Reference Channel	1,2		CR.3.1 TDD
	3,4		CR.3.2 TDD
Dedicated CORESET Reference Channel	1,2		CCR.3.1 TDD
	3,4		CCR.3.7 TDD
SSB configuration	1,2		SSB.1 FR2
	3,4		SSB.2 FR2
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~4		SMTC.1
TRS Configuration	1~4		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2
DRX configuration	1~4		Off
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	320
T1	1~4	s	5
T2	1~4	s	2
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			

EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.5.6.3.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Assumption for UE beams ^{Note 4}	1~4		Rough			
N_{oc} ^{Note2}	1~4	dBm/15kHz	-105			
N_{oc} ^{Note2}	1,2	dBm/SSB SCS	-96			
	3,4		-93			
$\hat{E}_s/I_{ot}$	1~4	dB	0	0	-Infinity	9
SSB_RP ^{Note3}	1,2	dBm/SSB SCS	-96	-96	-Infinity	-87
	3,4		-93	-93	-Infinity	-84
I_o ^{Note3}	1,2	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	3,4		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s/N_{oc}$	1~4	dB	0	0	-Infinity	9
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.5.6.3.1.3 Test Requirements

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 1680 for UE supporting power class 1

- 1200 for UE supporting power class 2,3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.6.3.2 SSB based L1-RSRP measurement when DRX is used

A.5.6.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.5.6.3.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.5.6.3.2.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.5.6.3.2.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.3.2.2-1 and Table A.5.6.3.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.5.6.3.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1~4		TDD
TDD Configuration	1~4		TDDConf.3.1
BW _{channel}	1~4	MHz	100: N _{RB,c} = 66
Data RBs allocated	1~4		66
PDSCH Reference measurement channel	1,2		SR.3.2 TDD
	3,4		SR.3.3 TDD
RMSI CORESET Reference Channel	1,2		CR.3.1 TDD
	3,4		CR.3.2 TDD
Dedicated CORESET Reference Channel	1,2		CCR.3.1 TDD
	3,4		CCR.3.7 TDD
SSB configuration	1,2		SSB.1 FR2
	3,4		SSB.2 FR2
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1
			ULBWP.0.1

Dedicated BWP configuration	1~4		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~4		SMTC.1
TRS Configuration	1~4		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2
DRX configuration	1~4		DRX.3
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	320
T1	1~4	s	5
T2	1~4	s	3
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.5.6.3.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Assumption for UE beams ^{Note 4}	1~4		Rough			
N_{oc} ^{Note2}	1~4	dBm/15kHz	-105			
N_{oc} ^{Note2}	1,2	dBm/SSB SCS	-96			
	3,4		-93			
$\hat{E}_s/I_{ot}$	1~4	dB	0	0	-Infinity	9
SSB_RP ^{Note3}	1,2	dBm/SSB SCS	-96	-96	-Infinity	-87
	3,4		-93	-93	-Infinity	-84
I_o ^{Note3}	1,2	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	3,4		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s/N_{oc}$	1~4	dB	0	0	-Infinity	9
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						

- Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
- Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.5.6.3.2.3 Test Requirements

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 2880 for UE supporting power class 1
- 1920 for UE supporting power class 2,3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.5.6.3.3 CSI-RS based L1-RSRP measurement when DRX is not used

A.5.6.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.5.6.3.3.1-1.

Table A.5.6.3.3.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.5.6.3.3.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.3.3.2-1 and Table A.5.6.3.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 480ms from the beginning of the test, the DCI trigger comes in slot 1 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.5.6.3.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.5.6.3.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
BW _{channel}	1~2	MHz	100: N _{RB,c} = 66
Data RBs allocated	1~2		66

PDSCH Reference measurement channel	1~2		SR.3.3 TDD
RMSI CORESET Reference Channel	1~2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.7 TDD
SSB configuration	1~2		SSB.1 FR2
CSI-RS configuration	1~2		CSI-RS.3.3 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		Off
reportConfigType	1~2		aperiodic
reportQuantity	1~2		cri-RSRP
Number of reported RS	1~2		2
qcl-Info	1~2		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1~2		8
Propagation condition	1~2		AWGN
T1	1~2	s	5
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.5.6.3.3.2-1: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1~2		Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 4}	1~2		Rough	
N_{oc} ^{Note1}	1~2	dBm/15kHz	-105	
N_{oc} ^{Note1}	1~2	dBm/SSB SCS	-95.97	
$\hat{E}_s/I_{ot}$	1~2	dB	0	9

CSI-RS RSRP Note2	1~2	dBm/SSB SCS	-95.97	-86.97
I_o Note2	1~2	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	9
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.6.3.3.3 Test Requirements

After 480ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.20.1. The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

For absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1, the UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.6.3.3.3-1.

For relative accuracy of CSI-RS0 compared with CSI-RS1, the UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.5.6.3.3.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
CSI-RS0	$\text{CSI-RS_RP0} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP0} + \delta + G_{\max}$
CSI-RS1	$\text{CSI-RS_RP1} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP1} + \delta + G_{\max}$
Note 1:	CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the I_o used in the test
Note 3:	$G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.5.6.3.4 CSI-RS based L1-RSRP measurement when DRX is used

A.5.6.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.5.6.3.4.1-1.

Table A.5.6.3.4.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.5.6.3.4.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.3.4.2-1 and Table A.5.6.3.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 1440ms from the beginning of the test, the DCI trigger comes in slot 1 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.5.6.3.4.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.5.6.3.4.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
BW _{channel}	1~2	MHz	100: N _{RB,c} = 66
Data RBs allocated	1~2		66
PDSCH Reference measurement channel	1~2		SR.3.3 TDD
RMSI CORESET Reference Channel	1~2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.7 TDD
SSB configuration	1~2		SSB.1 FR2
CSI-RS configuration	1~2		CSI-RS.3.3 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1
SMTc configuration	1~2		SMTc.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		DRX.3
reportConfigType	1~2		aperiodic
reportQuantity	1~2		cri-RSRP
Number of reported RS	1~2		2
qcl-Info	1~2		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1~2		8
Propagation condition	1~2		AWGN
T1	1~2	s	5
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			

EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.5.6.3.4.2-1: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1~2		Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 4}	1~2		Rough	
N_{oc} ^{Note1}	1~2	dBm/15kHz	-105	
N_{oc} ^{Note1}	1~2	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1~2	dB	0	9
CSI-RS RSRP ^{Note2}	1~2	dBm/SSB SCS	-95.97	-86.97
I_o ^{Note2}	1~2	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	9
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.6.3.4.3 Test Requirements

After 1440ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.20.1. The reported L1-RSRP value shall include the Rx antenna gain in the range of [-10 ~ +20] dB.

For absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1, the UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.6.3.4.3-1.

For relative accuracy of CSI-RS0 compared with CSI-RS1, the UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.5.6.3.4.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
CSI-RS0	$CSI-RS_RP0 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq CSI-RS_RP0 + \delta + G_{max}$
CSI-RS1	$CSI-RS_RP1 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq CSI-RS_RP1 + \delta + G_{max}$
Note 1: CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration	
Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the I_o used in the test	

Note 3:	$G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class
---------	---

A.5.6.4 CLI measurements

A.5.6.4.1 SRS-RSRP measurement with DRX

A.5.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of SRS-RSRP measurement. This test will verify the SRS-RSRP measurement requirements in clause 9.7.2.5 with the testing configurations for NR cells in Table A.5.6.4.1.1-1.

Table A.5.6.4.1.1-1: Applicable NR configurations for FR2 SRS-RSRP test

Configuration	Description
1	NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode

A.5.6.4.1.2 Test Parameters

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and FR2 PSCell (Cell 2). The test parameters for PSCell is given in Table A.5.6.4.1.2-1 ~ A.5.6.4.1.2-3 below and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system transmits SRS resource for measurement in the DL slot according to the SRS configuration in Table A.5.6.4.1.2-4 and the test parameters for the (virtual) neighbour cell UE in Table A.5.6.4.1.2-3. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 2 data symbols before SRS to be transmitted.

Table A.5.6.4.1.2-1: General test parameters for SRS-RSRP event triggered reporting for PSCell in FR2

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	E-UTRAN Cell 1 and NR Cell 2	
RF Channel Number		1	1: Cell 1 2: Cell 2	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC.1	
SRS configuration		1	SRSCnf.1	Table A.5.6.4.1.2-4
CP length		1	Normal	
i1-Threshold	dBm	1	-103	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX	ms	1	DRX.11	
Time offset between DL from serving cell and SRS from test system	μs	1,2	10.67	
T1	s	1	5	
T2	s	1	1	

Table A.5.6.4.1.2-2: NR Cell specific test parameters for SRS-RSRP event triggered reporting for PSCell in FR2

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns		1	OP.1	
TRS configuration			TRS.2.1. TDD	
PDSCH/PDCCH TCI state		1	TCI.State.2	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1	
Propagation Condition		1	AWGN	

Table A.5.6.4.1.2-3: NR OTA Cell specific test parameters for SRS-RSRP event triggered reporting for PSCell and Neighbour cell UE in FR2

Parameter	Unit	Test configuration	Cell 2		Neighbour cell UE	
			T1	T2	T1	T2
AoA setup		1	Setup 1 defined A.3.15.1			
Beam assumption Note 4		1	Fine			
N_{oc} Note 2	dBm/15 kHz	1	-98		-98	
N_{oc} Note 2	dBm/SCS	1	-89		-89	
$\hat{E}_s / I_{ot}$	dB	1	-	-	-infinity	4
$\hat{E}_s / N_{oc}$	dB	1	4	4	-infinity	4
SRS-RSRP Note 3	dBm/SCS kHz	1	-	-	-infinity	-94
I_o	dBm/95.04 MHz	1	-61.36	-55.91	-70.01	-68.82
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 5 : Cell 2 doesn't transmit during the SRS and the 2 previous symbols. E_s/N_{oc} is not applied to those symbols.						

Table A.5.6.4.1.2-4: SRS configuration for measurement reporting

	Field	SRSCnf.1	Comments
SRS-ResourceSet	srs-ResourceSetId	0	
	srs-ResourceIdList	0	
	resourceType	Periodic	
	Usage	Codebook	
SRS-Resource	SRS-ResourceId	0	
	nrofSRS-Ports	Port1	
	transmissionComb	n2	
	combOffset-n2	0	
	cyclicShift-n2	0	
	resourceMapping startPosition	0	
	resourceMapping nofSymbols	n1	
	resourceMapping repetitionFactor	n1	
	freqDomainPosition	0	
	freqDomainShift	0	
	freqHopping c-SRS	12	
	freqHopping b-SRS	0	
	freqHopping b-hop	0	
	groupOrSequenceHopping	Neither	
	resourceType	Periodic	
	periodicityAndOffset	sl160, 25	
	sequenceId	0	Any 10 bit number

A.5.6.4.1.3 Test Requirements

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 60 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.4.2 CLI-RSSI measurement with DRX

A.5.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of CLI-RSSI measurement. This test will verify the CLI-RSSI measurement requirements in clause 9.7.3.5 with the testing configurations for NR cells in Table A.5.6.4.2.1-1.

Table A.5.6.4.2.1-1: Applicable NR configurations for FR2 CLI-RSSI test

Configuration	Description
1	NR 120 kHz SCS, 100 MHz bandwidth, TDD duplex mode

A.5.6.4.2.2 Test Parameters

Two cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and FR2 PSCell (Cell 2). The test parameters for PSCell is given in Table A.5.6.4.2.2-1 ~ A.5.6.4.2.2-3 below and applicability for the E-UTRAN cell are defined in A.3.7.2. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI measurement resource and on 2 data symbols before. The CLI-RSSI measurement resource configuration is in Table A.5.6.4.2.2-4.

Table A.5.6.4.2.2-1: General test parameters for CLI-RSSI event triggered reporting for PSCell in FR2

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	E-UTRAN Cell 1 and NR Cell 2	
RF Channel Number		1	1: Cell 1 2: Cell 2	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC.1	
CLI-RSSI configuration		1	CLI-RSSICnf.1	Table A.5.6.4.2.2-4
CP length		1	Normal	
i1-Threshold	dBm	1	-94.5	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX		1	DRX.11	
Time offset between DL from serving cell and OCNG from test system	μs	1	10.67	
T1	s	1	5	
T2	s	1	1	

Table A.5.6.4.2.2-2: NR Cell specific test parameters for CLI-RSSI event triggered reporting for PSCell in FR2

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
PUSCH parameters		1	N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns ^{Note 1}		1	OP.1	
TRS configuration			TRS.2.1. TDD	
PDSCH/PDCCH TCI state		1	TCI.State.2	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1	
Propagation Condition		1	AWGN	
Note 1: OCNG is not transmitted in the CLI-RSSI measurement resources.				

Table A.5.6.4.2.2-3: NR OTA Cell specific test parameters for CLI-RSSI event triggered reporting for PSCell in FR2

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
AoA setup		1	Setup 1 defined in A.3.15.1	
Beam assumption ^{Note 3}		1	Fine	
N_{oc} on CLI-RSSI measurement resource ^{Note 2}	dBm/15 kHz	1	-119	-108
N_{oc} on CLI-RSSI measurement resource ^{Note 2}	dBm/SCS	1	-110	-99
Io on CLI-RSSI measurement resource	dBm/95.04 MHz	1	-81.01	-70.01
Io on CLI-RSSI measurement resource	dBm/1.08 MHz	1	-100.46	-89.46
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.				

Table A.5.6.4.2.2-4: CLI-RSSI measurement resource configuration for measurement reporting

	Field	CLI-RSSIConf.1
RSSI-Resource	rsi-ResourceId	0
	rsi-SCS	120
	startPRB	0
	nrofPRBs	66
	startPosition	3
	nrofSymbols	11
	rsi-PeriodicityAndOffset	sl160, 25

A.5.6.4.2.3 Test Requirements

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 20 ms from the beginning of time period T2. The nominal RSSI used to evaluate the requirement shall be based on Io.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.5 Measurements with autonomous gaps

A.5.6.5.1 EN-DC inter-frequency CGI identification of NR neighbor cell in FR2

A.5.6.5.1.1 Test Purpose and Environment

This test is to verify the requirement for identification of a new CGI of NR cell with autonomous gaps in clause 9.11.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.5.1.1-1, A.5.6.5.1.1-2, and A.5.6.5.1.1-3.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of cell 3. Starting T2, cell 3 becomes detectable and the UE is expected to detect and send a measurement report with SSB index. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. Gap pattern configuration with id #0 is configured before T2 begins to enable inter-frequency monitoring.

A RRC message implying SI reading with autonomous gap shall be sent to the UE during period T2, within 3s after the UE has reported Event A3. The RRC message shall create a measurement report configuration with *reportCGI* and *useAutonomousGaps-r16* setup. The start of T3 is the instant when the last TTI containing the RRC message implying SI reading is sent to the UE. Measurement gaps shall be deconfigured before the start of T3.

PDCCHs indicating new transmissions shall be sent continuously to ensure that the UE would have ACK/NACK sending during identifying a new CGI of NR cell.

The configuration of LTE cell 1 is defined in table A.3.7.2.2-1. Supported test configurations are shown in table A.5.6.5.1.1-1.

Table A.5.6.5.1.1-1 Supported test configurations for EN-DC inter-frequency CGI identification of NR neighbor cell in FR2

Config	Description
1	LTE FDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.5.6.5.1.1-2: General test parameters for EN-DC inter-frequency CGI identification of NR neighbor cell in FR2

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2	1	One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3	NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	As specified in clause 9.1.2-1.

Measurement gap offset		Config 1,2	39	
SMTC-SSB parameters		Config 1,2	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1,2	-15	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between PCell and PSCell		Config 1,2	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μ s	Synchronous cells.
T1	s	Config 1,2	5	
T2	s	Config 1,2	7 for PC1; 4.5 for other PC	
T3	s	Config 1,2	5	

Table A.5.6.5.1.1-3: Cell specific test parameters for EN-DC inter-frequency CGI identification of NR neighbor cell in FR2

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2, T3	T1	T2, T3
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
BW _{channel}	MHz	Config 1,2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP BW	MHz	Config 1,2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	DLBWP.0.1			
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
RMSI scheduling periodicity	ms	Config 1,2	NA		20	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
TCI configuration		Config 1,2	CSI-RS.Config.0		NA	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	

EPRE ratio of PSS to SSS		Config 1,2	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation Condition		Config 1,2	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.5.6.5.1.1-4: OTA cell specific test parameters for EN-DC inter-frequency CGI identification of NR neighbor cell in FR2

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2, T3	T1	T2, T3
AoA setup		Config 1,2	Setup 1 defined in A.3.15.1			
Assumption for UE beams ^{Note 4}		Config 1,2	Rough		Rough	
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	-Infinity	-3
N_{oc} ^{Note 2}	dBm/15 KHz	Config 1,2	-102			
N_{oc} ^{Note 2}	dBm/SCS	1, 2	-93			
SS-RSRP	dBm/SCS	1, 2	-89	-89	-Infinity	-96
$\hat{E}_s/N_{oc}$	dB	1~4	4	4	-Infinity	-3
I_o	dBm/95.04MHz	1~4	-58.56		-62.25	
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.					
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone					

A.5.6.5.1.2 Test Requirements

The UE shall transmit a measurement report containing the cell global identifier of cell 3 within 775 milliseconds from the start of T3.

Test requirement = RRC Procedure delay + $T_{\text{identify_CGI}}$ + additional margin for FR2 + TTI insertion uncertainty
 = $15 + (25 \cdot 20 + 6 \cdot 20) + 20 + 2\text{ms}$ from the start of T3
 = 657 ms, allow 660 ms.

The UE shall be scheduled continuously throughout the test, and from the start of T3 until 660 ms the number of interrupted slots shall not exceed the allowed number as defined in clause 8.2.1.2.16.

The maximum number of interrupted slots allowed is $25 \cdot 48 + 6 \cdot 49 = 1494$.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \cdot TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.6 L1-SINR measurement for beam reporting

A.5.6.6.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR configured when DRX is used

A.5.6.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements in clause 9.8.4.1, with the testing configurations for NR cells in Table A.5.6.6.1.1-1.

Table A.5.6.6.1.1-1: Applicable NR configurations for FR2 CSI-RS based L1-SINR test

Config	Description
1	LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.5.6.6.1.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.6.1.2-1 and Table A.5.6.6.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. After 480ms from the beginning of the test, the DCI trigger comes in slot 8 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.5.6.6.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.5.6.6.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
BW _{channel}	1~2	MHz	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD

RMSI CORESET Reference Channel	1~2		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1~2		SSB.1 FR2
CSI-RS configuration	1~2		CSI-RS.3.3 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		DRX.3
reportConfigType	1~2		aperiodic
reportQuantity-r16	1~2		cri-SINR-r16
Number of reported RS	1~2		2
qcl-Info	1~2		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1~2		26
Propagation condition	1~2		AWGN
T1	1~2	s	5
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.5.6.6.1.2-1: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1~2		Setup 1 according to A.3.15.1	
Beam assumption ^{Note 3}	1~2		Rough	
N_{oc} ^{Note1}	1~2	dBm/15kHz	-105	
N_{oc} ^{Note1}	1~2	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1~2	dB	0	9
CSI-RS RSRP ^{Note2}	1~2	dBm/SSB SCS	-95.97	-86.97
I_o ^{Note2}	1~2	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB		

			0	9
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2:	CSI-RS RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			

A.5.6.6.1.3 Test Requirements

After 480ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.28.1.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.5.6.6.2 L1-SINR measurement with SSB based CMR and dedicated IMR when DRX is not used

A.5.6.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements in clause 9.8.4.2, with the testing configurations for NR cells in Table A.5.6.6.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.5.6.6.2.1-1: Applicable NR configurations for FR2 L1-SINR measurement test with SSB based CMR and CSI-RS based IMR

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations

A.5.6.6.2.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.6.2.2-1 and Table A.5.6.6.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the SSBs and the associated CSI-RS resources, and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD measurements based on the SSBs, and UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-RS resources as IMR.

Table A.5.6.6.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1~4		TDD
TDD Configuration	1~4		TDDConf.3.1
BW _{channel}	1~4	MHz	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1~4		SR.3.1 TDD
RMSI CORESET Reference Channel	1~4		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~4		CCR.3.1 TDD
SSB configuration	1,2		SSB.1 FR2
	3,4		SSB.2 FR2
CSI-RS configuration	1~4		CSI-RS.3.1A TDD
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~4		SMTC.1
TRS Configuration	1~4		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2
DRX configuration	1~4		off
reportConfigType	1~4		periodic
reportQuantity-r16	1~4		ssb-Index-SINR-r16
Number of reported RS	1~4		2
L1-SINR reporting period	1~4	slot	640
T1	1~4	s	5
T2	1~4	s	3
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.5.6.6.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0	SSB#1
-----------	--------	------	-------	-------

			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam assumption ^{Note 4}			Rough			
N_{oc} ^{Note2}	1~4	dBm/15kHz	-105			
N_{oc} ^{Note2}	1,2	dBm/SSB SCS	-96			
	3,4		-93			
$\hat{E}_s/I_{ot}$	1~4	dB	0	0	-Infinity	9
SSB RSRP ^{Note3}	1,2	dBm/SSB SCS	-96	-96	-Infinity	-87
	3,4		-93	-93	-Infinity	-84
I_o ^{Note3}	1,2	dBm/95.04MHz	-63.97	-63.97	-67	-57.5
	3,4		-63.97	-63.97	-67	-57.5
$\hat{E}_s/N_{oc}$	1~4	dB	0	0	-Infinity	9
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SSB RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

Table A.5.6.6.2.2-3: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0		CSI-RS#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam assumption ^{Note 4}			Rough			
N_{oc} ^{Note2}	1~4	dBm/15kHz	-105			
N_{oc} ^{Note2}	1~4	dBm/CSI-RS SCS	-96			
$\hat{E}_s/I_{ot}$	1~4	dB	0	0	-Infinity	9
$\hat{E}_s/N_{oc}$	1~4	dB	0	0	-Infinity	9
CSI-RS RSRP ^{Note3}	1~4	dBm/ CSI-RS SCS	-96	-96	-Infinity	-87
I_o ^{Note3}	1~4	dBm/95.04MHz	-63.97	-63.97	-67	-57.5
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.6.6.2.3 Test Requirements

The UE shall send L1-SINR report every 640 slots. No later than X ms plus 640 slots from the beginning of time period T2, UE shall send L1-SINR report including the results for both SSB#0+CSI-RS#0 and SSB#1+CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.28.2, where X is

- 2880 for UE supporting power class 1
- 1920 for UE supporting power class 2, 3 or 4.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.6.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR configured when DRX is not used

A.5.6.6.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements with CSI-RS based CMR and dedicated IMR configured in clause 9.8.4.3, with the testing configurations for NR cells in Table A.5.6.6.3.1-1.

Table A.5.6.6.3.1-1: Applicable NR configurations for FR2 L1-SINR test with CMR and dedicated IMR

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.5.6.6.3.2 Test parameters

There are two cells in the test, E-UTRAN PCell (Cell 1) and FR2 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.6.6.3.2-1 and Table A.5.6.6.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the configured CSI-RS as CMR and an associated CSI-IM as IMR, and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources and the associated IMR. UE is also configured to measure L1-SINR based on SSB. After 480ms from the beginning of the test, the DCI trigger comes in slot 8 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.5.6.6.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs, and UE is configured to perform L1-SINR measurement based on the CSI-RS as CMR and the CSI-IM as IMR.

Table A.5.6.6.3.2-1: General test parameters

Parameter	Config	Unit	Value
-----------	--------	------	-------

SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
BW _{channel}	1~2	MHz	100: N _{RB,C} = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1~2		SSB.1 FR2
CSI-RS configuration	1~2		CSI-RS.3.3 TDD
CSI-IM configuration	1~2		CSI-IM.3.2 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		Off
reportConfigType	1~2		aperiodic
reportQuantity-r16	1~2		cri-SINR-r16
Number of reported RS	1~2		2
qcl-Info	1~2		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1~2		26
T1	1~2	s	5
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.5.6.6.3.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1~2		Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 3}	1~2		Rough	
N_{oc} ^{Note1}	1~2	dBm/15kHz	-105	

N_{oc} ^{Note1}	1~2	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1~2	dB	0	9
CSI-RS RSRP ^{Note2}	1~2	dBm/SSB SCS	-95.97	-86.97
I_o ^{Note2}	1~2	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	9
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.6.6.3.3 Test Requirements

After 480ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 as CMR + CSI-IM#0 as IMR and CSI-RS#1 as CMR + CSI-IM#1 as IMR while meeting the accuracy requirements defined in clause 10.1.28.3. The reported L1-SINR value shall consider the Rx antenna gain in the range of [-10 ~ +20] dB when calculated.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.7 CSI-RS based Intra-frequency Measurements

A.5.6.7.1 EN-DC event triggered reporting test without gap under non-DRX

A.5.6.7.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification requirements in clause e. Supported test configurations are shown in table A.5.6.7.1.1-1.

Table A.5.6.7.1.1-1: supported test configurations

Configuration	Description
1	LTE FDD, 120 kHz SSB SCS, 120Khz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 120Khz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on the same frequency as the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.6.7.1.1-2, A.5.6.7.1.1-3 and A.5.6.7.1.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of cell 3.

Table A.5.6.7.1.1-2: General test parameters for intra-frequency event triggered reporting for EN-DC with PSCell in FR2 without gap without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1,2	E-UTRAN PCell (Cell 1) PSCell (Cell 2)	
Neighbour cell		1,2	Cell 3	Cell to be identified.
RF Channel Number		1,2	1: Cell 1 2: Cell 2 and Cell 3	One TDD carrier frequency is used for the NR cells and one TDD or FDD carrier frequency is used for E-UTRAN cell.
SMTc configuration		1,2	SMTc.1	
A3-Offset	dB	1,2	-6	
CP length		1,2	Normal	
Hysteresis	dB	1,2	0	
Time To Trigger	s	1,2	0	
Filter coefficient		1,2	0	L3 filtering is not used
DRX		1,2	OFF	
Time offset between Cell 1 and Cell 2	μs	1,2	3	Synchronous EN-DC
Time offset between Cell 2 and Cell 3	μs	1,2	0.58	The timing of Cell 3 is CP later than the timing of Cell 2.
T1	s	1,2	5	
T2	s	1,2	5	

Table A.5.6.7.1.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with PSCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1,2	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1,2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Initial BWP configuration		1,2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1,2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1,2	SSB		SSB	
PDSCH RMC configuration		1,2	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1,2	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1,2	CCR.3.1 TDD		CCR.3.1 TDD	
OCNG Patterns		1,2	OP.1		OP.1	
TRS configuration		1,2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state		1,2	TCI.State.2		N/A	
SMTc configuration		1, 2	SMTc.1		SMTc.1	
SSB configuration		1,2	SSB.3 FR2		SSB.3 FR2	

CSI-RS RRM configuration		1,2	CSI-RS.RRM.FR2.1 TDD	CSI-RS.RRM.FR2.1 TDD except Associated SSB index = 1; slotConfig = ms20 (slot 2)
Propagation Condition		1,2	AWGN	

Table A.5.6.7.1.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for EN-DC with PSCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		1,2	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Assumption for UE beams ^{Note 4}		1,2	Rough		Rough	
$\hat{E}_s/I_{ot}$ for SSB	dB	1,2	4	4	-Infinity	8
$\hat{E}_s/I_{ot}$ for CSI-RS	dB	1,2	4	4	-Infinity	8
N_{oc} ^{Note 2}	dBm/15 KHz	1,2	-102			
N_{oc} ^{Note 2}	dBm/SCS	1,2	-93			
SS-RSRP	dBm/SCS	1,2	-89	-89	-Infinity	-85
CSI-RSRP	dBm/SCS	1,2	-89	-89	-Infinity	-85
$\hat{E}_s/N_{oc}$ for SSB	dB	1,2	4	4	-Infinity	8
$\hat{E}_s/N_{oc}$ for CSI-RS	dB	1,2	4	4	-Infinity	8
I_o	dBm/95.04MHz	1,2	-58.56		-55.38	
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.					

A.5.6.7.1.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 3.2s for a UE supporting power class 1,
- 2.4s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test in order to detect associated SSB for the CSI-RS resource of Cell 3.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.6.8 CSI-RS based Inter-frequency Measurements

A.5.6.8.1 EN-DC event triggered reporting tests for NR FR2 cell when DRX is used

A.5.6.8.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.10.3.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR2 on NR RF channel 1 and NR cell 3 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.5.6.8.1.1-1, A.5.6.8.1.1-2, and A.5.6.8.1.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.5.6.8.1.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #13 as defined in Table A. 5.6.5.1.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #13, it is only required to pass test2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.2-1. Supported test configurations are shown in table A.5.6.8.1.1-1.

Table A.5.6.8.1.1-1 EN-DC event triggered reporting tests for FR2-FR2

Config	Description
1	LTE FDD, 120 kHz SSB SCS, 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, 120 kHz SSB SCS, 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.5.6.8.1.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN TDD carrier frequencies is used.
NR RF Channel Number		Config 1,2	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 (PSCell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1.

Neighbour cell		Config 1,2	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	39	39	
SMTC-SSB parameters		Config 1,2	SSB.3 FR2		As specified in clause A.3.10.2
A3-Offset	dB	Config 1,2	-6		
Hysteresis	dB	Config 1,2	0		
CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	DRX.1		As specified in clause A.3.3.3
Time offset between PCell and PSCell	μs	Config 1,2	3		Synchronous EN-DC
Time offset between serving and neighbour cells	μs	Config 1,2	0.58		The timing of Cell 3 is CP later than the timing of Cell 2.
T1	s	Config 1,2	5		
T2	s	Config 1,2	21 for PC1; 13 for other PC	21 for PC1; 13 for other PC	

Table A.5.6.8.1.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
AoA setup		Config 1,2	Setup 1 as specified in clause A.3.15			
Assumption for UE beams ^{Note 7}		Config 1,2	Rough		Rough	
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD		TDD	
BW _{channel}	MHz	Config 1,2	10: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP BW	MHz	Config 1,2	10: N _{RB,c} = 66		100: N _{RB,c} = 66	
TDD configuration		Config 1,2	TDDConf.3.1		TDDConf.3.1	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	ULBWP.0.1			
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,2	SR.3.1 TDD		-	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	120		120	
CORESET Reference Channel		Config 1,2	CR.3.1 TDD		-	
TRS configuration		Config 1,2	TRS.2.1 TDD		NA	
TCI configuration		Config 1,2	CSI-RS.Config.0		NA	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.1		SMTC.1	
CSI-RS RRM configuration		Config 1,2	CSI-RS.RRM.FR2.1 TDD		CSI-RS.RRM.FR2.1 TDD	
firstOFDMSymbolInTimeDomain		Config 1,2	7		12	

N_{oc} ^{Note2}	dBm/1 5kHz ^{Note5}		-104.7		-104.7	
N_{oc} ^{Note2}	dBm/S CS ^{Note4}	Config 1,2	-95.7		-95.7	
CSI-RSRP ^{Note 3}	dBm/S CS ^{Note5}	Config 1,2	-89.7	-89.7	-Infinity	-86.7
SS-RSRP ^{Note 3}	dBm/S CS ^{Note5}	Config 1,2	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s/I_{ot}$ for SSB	dB	Config 1,2	6	6	-Infinity	9
$\hat{E}_s/I_{ot}$ for CSI-RS	dB	Config 1,2	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$ for SSB	dB	Config 1,2	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$ for CSI-RS	dB	Config 1,2	6	6	-Infinity	9
I_o ^{Note3}	dBm/9 5.04 MHz ^{Note5}	Config 1,2	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1,2,3,4,5,6	AWGN			
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP, CSI-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	SS-RSRP and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone					
Note 6:	As observed with 0dBi gain antenna at the centre of the quiet zone					
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.5.6.8.1.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

20160 ms for UE supporting power class 1, or

12480 ms for UE supporting other power class.

The UE is required to read the neighbour cell SSB index in this test in order to detect associated SSB for the CSI-RS resource of Cell 3.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.5.7 Measurement Performance requirements

Unless explicitly stated otherwise:

- Reported measurements shall be within defined range of accuracy limits defined in Clause 10 for at least 90 % of the reported cases. If multiple measurement performance requirements are verified in the same test, the reported measurements for each requirement shall be within defined range of accuracy limits of the corresponding requirement defined in Clause 10 for at least 90% of the reported cases.
- Measurements are performed in RRC_CONNECTED state.
- The reference channels assume transmission of PDSCH with a maximum number of 5 HARQ transmissions unless otherwise specified.

A.5.7.1 SS-RSRP

A.5.7.1.1 EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.5.7.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.3.1.1 and 10.1.3.1.2 for intra-frequency measurements.

A.5.7.1.1.2 Test parameters

In this set of test cases, all NR cells are on the same carrier frequency. Supported test configurations are shown in Table A.5.7.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in Table A.5.7.1.1.2-2 and A.5.7.1.1.2-3. The E-UTRA PCell is configured as specified in clause A.3.7.2.2. In all test cases, Cell 1 is the PCell, cell 2 is the PSCell and Cell 3 is the target cell. The test consists of two time phases T1 and T2.

Table A.5.7.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.7.1.1.2-2: SS-RSRP Intra frequency general test parameters

Parameter ^{Note 5}		Unit	T1		T2	
			Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID			489	0	489	0
SSB ARFCN			freq1		freq1	
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	100: N _{RB,C} = 66		100: N _{RB,C} = 66	
Data RBs allocated			24		24	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2. 1 TDD	-	TRS.2. 1 TDD	-

TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.2 TDD	-	SR.3.2 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Reference Channel		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
Time offset with Cell 2	μs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Propagation conditions		AWGN		AWGN	
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Void					
Note 3: Void					
Note 4: Void					
Note 5: All parameters apply for configuration 1 and 2					
Note 6: Void					

Table A.5.7.1.1.2-3: SS-RSRP Intra frequency OTA related test parameters

Parameter	Unit	T1		T2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 8}		Rough			
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-91.6		N/A	
N_{oc} ^{Note1}	dBm/SCS ^{Note4}	-82.6		N/A	
$\hat{E}_s/N_{oc}$	dB	6.0	1.0	N/A	N/A
E_s	dBm/SCS ^{Note4}			(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
SSB_RP ^{Note2}	dBm/SCS	-76.6	-81.6	(Table B.2.2-2)	(Table B.2.2-2)

				Rx Beam Peak +2.1dB)	Rx Beam Peak +2.1dB)
$\hat{E}_s/I_{ot\ BB}$ Note6	dB	2.44	-5.98	-5.98	-5.98
I_o Note2	dBm/95.04 MHz Note4	-50.05		(Table B.2.2-2 Rx Beam Peak +29.70dB)	
Note 1:	Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2:	SSB_RP, E_s/I_{ot} , E_s in test 1 and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	Void				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	Void				
Note 6:	Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.				
Note 7:	All parameters apply for configurations 1 and 2				
Note 8:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.7.1.1.3 Test Requirements

The SS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.3.1.1 and relative accuracy requirements in clause 10.1.3.1.2. The following requirements are to be verified:

During T1:

Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table A.5.7.1.1.3-1.

Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

During T2:

Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table A.5.7.1.1.3-1.

Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

During T1 and T2:

Relative accuracy of Cell 2 during T2 compared with Cell 2 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1

Relative accuracy of Cell 3 during T2 compared with Cell 3 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

Table A.5.7.1.1.3-1: SS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3
Cell 2	$SSB_RP2 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP2 + \delta + G_{max}$

Cell 3	$SSB_RP3 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP3 + \delta + G_{max}$
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.3.1.1-1, selected according to the δ used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.5.7.1.2 EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.5.7.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.5.1.1 and 10.1.5.1.2 for inter-frequency measurements with the testing configurations for NR cells in Table A.5.7.1.2.1-1.

Table A.5.7.1.2.1-1: Applicable NR configurations for FR2 inter-frequency SS-RSRP accuracy test

Configuration	Description
1	FDD LTE PCell, cells 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, cells 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	FDD LTE PCell, cells 2&3 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	TDD LTE PCell, cells 2&3 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

A.5.7.1.2.2 Test parameters

In this set of test cases, there are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PCell (Cell 2) and a FR2 neighbour cell (Cell 3) on a different frequency than the PCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.7.1.2.2-1 and Table A.5.7.1.2.2-2 below. Both absolute and relative accuracy of RSRP intrer-frequency measurements are tested by using the parameters in Table A.5.7.1.2.2-1 and Table A.5.7.1.2.2-2. The inter-frequency measurements are supported by a measurement gap.

Table A.5.7.1.2.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN	1~4		freq1	freq2	freq1	freq2
BW _{channel}	1~4		100: N _{RB,C} = 66		100: N _{RB,C} = 66	
Data RBs allocated	1,2		24		24	
	3,4		48		48	
Duplex mode	1~4		TDD		TDD	
TDD configuration	1~4		TDDConf.3.1		TDDConf.3.1	
PDSCH Reference measurement channel	1,2		SR.3.2 TDD	-	SR.3.2 TDD	-
	3,4		SR.3.3 TDD		SR.3.3 TDD	
RMSI CORESET Reference Channel	1,2		CR.3.1 TDD	-	CR.3.1 TDD	-
	3,4		CR.3.2 TDD		CR.3.2 TDD	
	1,2		CCR.3.1 TDD	-	CCR.3.1 TDD	-

Dedicated CORESET Reference Channel	3,4		CCR.3.7 TDD		CCR.3.7 TDD	
SSB configuration	1,2		SSB.3 FR2		SSB.3 FR2	
	3,4		SSB.4 FR2		SSB.4 FR2	
PDSCH/PDCCH subcarrier spacing	1~4	kHz	120		120	
OCNG Patterns	1~4		OP.3		OP.3	
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~4		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration	1~4		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2		TCI.State.2	
SMTC configuration	1~4		SMTC.1		SMTC.1	
Time offset between Cell 2 and Cell 3	1~4	μs	3		3	
EPRE ratio of PSS to SSS	1~4	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
Propagation condition	1~4	-	AWGN	AWGN	AWGN	AWGN
Antenna configuration	1~4	-	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void						

Table A.5.7.1.2.2-2: SS-RSRP inter frequency OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration	1~4		Setup 4b according to clause A.3.15.4.2		Setup 4b according to clause A.3.15.4.2	
			AoA1 Spherical coverage	AoA2 Rx Beam Peak	AoA1 Spherical coverage	AoA2 Rx Beam Peak
Assumption for UE beams ^{Note 7}	1~4		Rough		Rough	
N_{oc} ^{Note1}	1, 2	dBm/15kHz ^{Note4}	-90.6	-90.6	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +1.97dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} -3.03dB)
	3, 4		-93.7	-93.7		
N_{oc} ^{Note1}	1, 2	dBm/SCS ^{Note4}	-81.6	-81.6	(Table B.2.3-2)	(Table B.2.3-2)

					Rx Beam Peak ^{Note 8} +11.0dB)	Rx Beam Peak ^{Note 8} +6.0dB)
	3, 4		-81.7	-81.7	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +14.0dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +9.0dB)
$\hat{E}_s / N_{oc}$	1~4	dB	6.0	6.0	17.0	-1.0
SSB_RP ^{Note2}	1, 2	dBm/SCS	-75.6	-75.6	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +28.0dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +5.0dB)
	3, 4		-75.7	-75.7	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +31.0dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +8.0dB)
(SSB_RP _{Cell 2} – SSB_RP _{Cell 3})	1~4	dB	0		23.00	
$\hat{E}_s / I_{ot\ BB}$ ^{Note6}	1, 2	dB	5.26	5.96	9.53	-3.46
	3, 4		4.61	5.91		
I _o ^{Note2}	1, 2	dBm/95.04 MHz ^{Note4}	-50.00	-50.00	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +52.68dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +33.13dB)
	3, 4		-50.09	-50.09	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +55.69dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +36.14dB)
(I _o freq 1 – I _o freq 2)	1~4	dB	0		19.55	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 2: SSB_RP, Es/I _{ot} , I _o , (SSB_RP _{Cell 3} – SSB_RP _{Cell 2}) and (I _o freq 2 – I _o freq 1) levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 3: Void						
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 5: Void						
Note 6: Calculation of Es/I _{ot} _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P or ΔMB _S from TS 38.101-2 [19] Table 6.2.1.3-4.						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 8: The value in Table B.2.3-2 is the Minimum SSB_RP for SCS _{SSB} = 120 kHz, selected according to the operating band of Cell 3 and UE power class, without ΔMB _{P,n} adjustment.						

A.5.7.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 and Cell 3 shall fulfil the absolute requirements in clause 10.1.5.1.1 and the relative requirements in clause 10.1.5.1.2.

Test 1:

Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.5.7.1.2.3-1.

Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in A.5.7.1.2.3-2.

Test 2:

Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.5.7.1.2.3-1.

Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in A.5.7.1.2.3-2.

Table A.5.7.1.2.3-1: SS-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3,4}
Cell 2	$SSB_RP2 - \delta + G_{min} + X \leq \text{Reported RSRP(dBm)} \leq SSB_RP2 + \delta + G_{max}$
Cell 3	$SSB_RP3 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP3 + \delta + G_{max}$
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.5.1.1-1, selected according to the I_o used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.

Table A.5.7.1.2.3-2: SS-RSRP relative accuracy test requirement

	Test requirement ^{Notes1,2,3,4, 5, 6, 7}
Cell 3 – Cell 2	$SSB_RP3 - SSB_RP2 - \delta - D - G_{inter} \leq \text{Reported RSRP(dB)} \leq SSB_RP3 - SSB_RP2 + \delta + G_{inter} - (X) + E$
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP relative accuracy requirement from Table 10.1.5.1.2-1
Note 3:	Void
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.
Note 5:	D is the margin due to mis-alignment between fine beam and rough beam. D is the Rough Beam gain reduction in Rx beam peak direction from Table B.2.1.5.3-1, selected according to the UE power class. D is always a positive value.
Note 6:	G_{inter} is the margin due to different antenna gain caused by frequency separation. G_{inter} is from Table B.2.1.5.2-1, selected according to the UE power class, and is always a positive value.
Note 7:	E = 3 (dB) is an additional margin to account for the actual gain difference between peak direction and spherical coverage using rough beams.

A.5.7.1.3 EN-DC inter-frequency measurement accuracy with FR1 serving cell and FR2 target cell

A.5.7.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.5.1.1 for inter-frequency measurements with the testing configurations in Table A.5.7.1.3.1-1.

Table A.5.7.1.3.1-1: Applicable NR configurations for FR2 inter-frequency SS-RSRP accuracy test

Config	Description of serving cell	Description of target cell
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

A.5.7.1.3.2 Test parameters

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR2 neighbour cell (Cell 3) on a different frequency than the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.7.1.3.2-1 and Table A.5.7.1.3.2-2 below. Absolute accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.5.7.1.3.2-1 and Table A.5.7.1.3.2-2. The inter-frequency measurements are supported by a measurement gap.

Table A.5.7.1.3.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN	1–6		freq1	freq2	freq1	freq2
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52	100: N _{RB,c} = 66	10: N _{RB,c} = 52	100: N _{RB,c} = 66
	2,5		10: N _{RB,c} = 52		10: N _{RB,c} = 52	
	3,6		40: N _{RB,c} = 106		40: N _{RB,c} = 106	
Data RBs allocated	1,2,4,5		52	24	52	66
	3,6		106		106	
Gap pattern ID			0		0	
Duplex mode	1,4		FDD	TDD	FDD	TDD
	2,5		TDD		TDD	
	3,6		TDD		TDD	
TDD configuration	1,4		N/A	TDDConf. 3.1	N/A	TDDConf. 3.1
	2,5		TDDConf. 1.1		TDDConf. 1.1	
	3,6		TDDConf. 2.1		TDDConf. 2.1	
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	2,5		SR.1.1 TDD		SR.1.1 TDD	

	3,6		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	-	CR.1.1 FDD	-
	2,5		CR.1.1 TDD	-	CR.1.1 TDD	-
	3,6		CR.2.1 FDD	-	CR.2.1 FDD	-
	1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
Dedicated CORESET Reference Channel	2,5		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3,6		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1,4		SSB.1 FR1	SSB.3 FR2	SSB.1 FR1	SSB.3 FR2
	2,5		SSB.1 FR1		SSB.1 FR1	
	3,6		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~6		OP.1	OP.3	OP.1	OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~6		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration	1~6		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration	1~6		TCI.State.2		TCI.State.2	
SMTC configuration	1~6		SMTC.1		SMTC.1	
Time offset between Cell 2 and Cell 3	1~6	µs	3		3	
EPRE ratio of PSS to SSS	1~6	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
Propagation condition	1~6	-	NA	AWGN	NA	AWGN
Antenna configuration	1~6	-	Link only, see clause A.3.7A	1x2	Link only, see clause A.3.7A	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void						

Table A.5.7.1.3.2-2: SS-RSRP inter-frequency OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 ^{NOTE 3}	
			Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration according to clause A.3.15			NA	Setup 2b	NA	Setup 2b
Assumption for UE beams ^{Note 4}			N/A	Rough	N/A	Rough
N_{oc}	1~6	dBm/15 kHz	Link only, see clause A.3.7A	-90	Link only, see clause A.3.7A	NA
N_{oc}	1~6	dBm/SS B SCS		-80.97		NA

$\hat{E}_s / N_{oc}$	1~6	dB		5		NA
E_s	1~6	dBm/SC S				(Table B.2.3-2 Spherical coverage +1dB)
SSB_RP ^{Note1}	1~6	dBm/SC S		-76.0		(Table B.2.3-2 Spherical coverage +1dB)
$\hat{E}_s / I_{ot\ BB}$ ^{Note6}	1~6	dB		4.35		-3.81
I_o ^{Note1}	1~6	dBm/ 95.04M Hz		-50.18		SSB_R P+28.9 8
Note 1: E_s/I_{ot}, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: Void Note 3: No additional noise is added by the test system in Test 2. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 5: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 6: Calculation of $E_s/I_{ot\ BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_s from TS 38.101-2 [19] Table 6.2.1.3-4.						

A.5.7.1.3.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 3 shall fulfil the Absolute requirement in clause 10.1.5.1.1.

Test 1:

Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.5.7.1.3.3.

Test 2:

Absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.5.7.1.3.3.

Table A.5.7.1.3.3: SS-RSRP absolute accuracy test requirement

	Test requirement Notes1,2,3,4
Cell 3	$SSB_RP2 - \delta + G_{min} + X \leq \text{Reported RSRP(dBm)} \leq SSB_RP2 + \delta + G_{max}$
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.5.1.1-1, selected according to the I_o used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

Note 4: X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.

A.5.7.2 SS-RSRQ

A.5.7.2.1 EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.8.1.1.

A.5.7.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.5.7.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is test by using the parameters in Table A.5.7.2.1.2-2 and Table A.5.7.2.1.2-3. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell.

Table A.5.7.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.7.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			Freq1		Freq1	
Cell ID			489		0	
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated			66		66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD		TRS.2.1 TDD	
TCI state			TCI.State .0		TCI.State .0	
PDSCH Reference measurement channel			SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC			CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns			OP.1	OP.1	OP.1	OP.1
SMTC configuration			SMTC.1			
SSB configuration			SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing		kHz	120	120	120	120

SS-RSSI-Measurement	dB	Not Applicable			
EPRE ratio of PSS to SSS		0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Propagation condition					
Antenna Configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Void					
Note 3: Void					
Note 4: Void					
Note 5: Void					

Table A.5.7.2.1.2-3: SS-RSRQ Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 9}		Rough			
N_{oc} ^{Note1}	dBm/15kHz ^{N_{ote4}}	-95		-95	
N_{oc} ^{Note1}	dBm/SCS ^{Note₃}	-86		-86	
$\hat{E}_s / N_{oc}$	dB	3		3	
SSB_RP ^{Note2}	dBm/SCS ^{Note4}	-83	-83	-89	-89

SS-RSRQ ^{Note2}	dB	-14.77	-14.77	-16.81	-16.81
$\hat{E}_s/I_{ot}$	dB	-1.76	-1.76	-4.76	-4.76
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-50		-54	I_o ^{Note2}
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: SS-RSRQ, SSB_RP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone					
Note 6: Void					
Note 7: Void					
Note 8: Void					
Note 9: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.5.7.2.1.3 Test Requirements

The SS-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal SS-RSRQ+2.5dB to Nominal SS-RSRQ -2.5dB and the SS-RSRQ measurement accuracy in test 2 shall be within the range Nominal SS-RSRQ +3.5dB to Nominal SS-RSRQ -3.5dB according to the requirements in clause 10.1.8.1.1. Nominal SS-RSRQ is the value shown in table A.5.7.2.1.2-3.

A.5.7.2.2 EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.9.1.1 and 10.1.9.1.2 for inter-frequency measurement.

A.5.7.2.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.5.7.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test setup in Table A.5.7.2.2.2-2 and Table A.5.7.2.2.2-3. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.5.7.2.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.5.7.2.2-2: SS-RSRQ Inter frequency general test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			Freq1	freq2	freq1	Freq2
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state			TCI.State.0	-	TCI.State.0	-
Data RBs allocated			66		66	
PDSCH Reference measurement channel			SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns			OP.1	OP.1	OP.1	OP.1
SSB configuration			SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration			SMTC.1	SMTC.1	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing		kHz	120	120	120	120
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
Propagation conditions			AWGN	AWGN	AWGN	AWGN
Antenna configuration			1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void						
Note 3: Void						
Note 4: Void						

Table A.5.7.2.2-3: SS-RSRQ Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
AoA setup		Setup 1 in clause A.3.15		Setup 1 in clause A.3.15	
Assumption for UE beams ^{Note 8}		Rough		Rough	
N_{oc} ^{Note 1}	dBm/15kHz ^{Note 4}	-94.03		-94.03	

N_{oc} ^{Note1}	dBm/SCS ₃ ^{Note}	-85.0		-85.0	
$\hat{E}_s / N_{oc}$	dB	-1.75		-1.75	
SSB_RP ^{Note2}	dBm/SCS _{Note4}	-86.75	-86.75	-88	-88
SS-RSRQ ^{Note2}	dB	-14.75	-14.75	-15.56	-15.56
$\hat{E}_s / I_{ot}$	dB	-1.75	-1.75	-3	-3
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-53.8	-53.8	-54.25	-54.25
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRQ, SSB_RP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone Note 6: Void Note 7: Void Note 8: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.5.7.2.2.3 Test Requirements

The SS-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal SS-RSRQ+2.5dB to Nominal SS-RSRQ-2.5dB and the SS-RSRQ measurement accuracy in test 2 shall be within the range Nominal SS-RSRQ+3.5dB to Nominal SS-RSRQ-3.5dB according to the requirements in clause 10.1.10.1.1.

The SS-RSRQ relative measurement accuracy shall fulfil the requirements in clause 10.1.10.1.2.

A.5.7.3 SS-SINR

A.5.7.3.1 EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.13.1.1.

A.5.7.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.5.7.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is test by using the parameters in Table A.5.7.3.1.2-2 and Table A.5.7.3.1.2-3. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell.

Table A.5.7.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.7.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Cell ID		489	0	489	0
SSB ARFCN		Freq2		Freq2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		66		66	
Downlink initial BWP configuration		DLBWP.0.1			
Downlink dedicated BWP configuration		DLBWP.1.1			
Uplink initial BWP configuration		ULBWP.0.1			
Uplink dedicated BWP configuration		ULBWP.1.1			
DRX cycle configuration	ms	Not applicable			
TRS configuration		TRS.2.1 TDD			
TCI state		TCI.State.0			
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated RMSI CORESET Reference Channel		CCR.3 .1 TDD	-	CCR.3. 1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
SS-RSSI-Measurement		Not Applicable			
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					

EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Propagation conditions		AWGN		AWGN	
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Void					
Note 3: Void					
Note 4: Void					

Table

A.5.7.3.1.2-3: SS-SINR Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 9}		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-105		-105	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-96		-96	
$\hat{E}_s / N_{oc}$	dB	4.54		2.66	
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-91.46	-93.34	-99	-99
SS-SINR ^{Note2}	dB	0	-3.2	-4.76	-4.76
$\hat{E}_s / I_{ot}$	dB	0	-3.2	-4.76	-4.76
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-59.43		-64	
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					

- Note 2: SS-SINR, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
- Note 3: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
- Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
- Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
- Note 6: Void
- Note 7: Void
- Note 8: Void
- Note 9: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.7.3.1.3 Test Requirements

clauseThe SS-SINR absolute measurement accuracy in test 1 shall be within the range Nominal SS-SINR+3B to Nominal SS-SINR -3dB and the SS-SINR measurement accuracy in test 2 shall be within the range Nominal SS-SINR +3.5dB to Nominal SS-SINR -3.5dB according to the requirements in clause 10.1.10.13.1. Nominal SS-SINR is the value shown in table A.5.7.3.1.2-3.

A.5.7.3.2 EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.15.1.1 and 10.1.15.1.2 for inter-frequency measurement.

A.5.7.3.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.5.7.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test setup in Table A.5.7.3.2.2-2 and Table A.5.7.3.2.2-3. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.5.7.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.5.7.3.2.2-2: SS-SINR Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		Freq1	freq2	freq1	Freq2	freq1	Freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		66		66		66	
Downlink initial BWP configuration		DLBWP.0.1					
Downlink dedicated BWP configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
DRX cycle configuration	ms	Not applicable					

TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1	OP.1	OP.1
SMTTC configuration		SMTTC. 1	SMTTC. 1	SMTTC. 1	SMTTC. 1	SMTTC. 1	SMTTC. 1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG_DMRS to SSS ^{Note 1}							
EPRE ratio of OCNG to OCNG_DMRS ^{Note 1}							
Propagation conditions		AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Void							
Note 3: Void							
Note 4: Void							

Table A.5.7.3.2.2-3: SS-SINR Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration	degrees	Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 10}		Rough		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-105	-105	-105	-105	-105	-105
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-96	-96	-96	-96	-96	-96
$\hat{E}_s / N_{oc}$	dB	-0.5		-0.5		11	
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-96.5	-96.5	-85	-85	-99	-99
SS-SINR ^{Note2}	dB	-0.5	-0.5	11	11	-3.0	-3.0
$\hat{E}_s / I_{\alpha}$	dB	-0.5	-0.5	11	11	-3.0	-3.0
I_0 ^{Note2}	dBm/95.04 MHz ^{Note4}	-69.3		-55.4		-65.24	

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-SINR, SSB_RP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	Void
Note 7:	Void
Note 8:	Void
Note 9:	Void
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.7.3.2.3 Test Requirements

The SS-SINR absolute measurement accuracy in test 1 shall be within the range Nominal SS-SINR+3dB to Nominal SS-SINR -3dB and the SS-SINR measurement accuracy in test 2 shall be within the range Nominal SS-SINR+3.5dB to Nominal SS-SINR -3.5dB according to the requirements in clause 10.1.15.1.1. Nominal SS-SINR is the value shown in table A.5.7.2.2.2-3

The SS-SINR relative measurement accuracy shall fulfil the requirements in clause 10.1.15.1.2.

A.5.7.4 L1-RSRP measurement for beam reporting

A.5.7.4.1 SSB based L1-RSRP measurement

A.5.7.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.5.2 and clause 10.1.20.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.5.7.4.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.5.7.4.1.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations in each supported band

A.5.7.4.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.7.4.1.2-1 and Table A.5.7.4.1.2-2 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.5.7.4.1.2-1 and Table A.5.7.4.1.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.5.7.4.1.2-1: FR2 SSB based L1-RSRP general test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~4		freq1	freq1
Duplex mode	1~4		TDD	TDD
TDD Configuration	1~4		TDDConf.3.1	TDDConf.3.1
BW _{channel}	1~4	MHz	100: N _{RB,c} = 66	100: N _{RB,c} = 66
Data RBs allocated	1~4		66	66
PDSCH Reference measurement channel	1,2		SR.3.2 TDD	SR.3.2 TDD
	3,4		SR.3.3 TDD	SR.3.3 TDD
RMSI CORESET Reference Channel	1,2		CR.3.1 TDD	CR.3.1 TDD
	3,4		CR.3.2 TDD	CR.3.2 TDD
Dedicated CORESET Reference Channel	1,2		CCR.3.1 TDD	CCR.3.1 TDD
	3,4		CCR.3.7 TDD	CCR.3.7 TDD
SSB configuration	1,2		SSB.1 FR2	SSB.1 FR2
	3,4		SSB.2 FR2	SSB.2 FR2
OCNG Patterns	1~4		OP.1	OP.1
Initial BWP Configuration	1~4		DLBWP.0.1	DLBWP.0.1
			ULBWP.0.1	ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.3	DLBWP.1.3
			ULBWP.1.3	ULBWP.1.3
TRS Configuration	1~4		TRS.2.1 TDD	TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2	TCI.State.2
SMTC configuration	1~4		SMTC.1	SMTC.1
reportConfigType	1~4		periodic	periodic
reportQuantity	1~4		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1~4		2	2
L1-RSRP reporting period	1~4		slot320	slot320
Propagation condition	1~4		AWGN	AWGN
Antenna configuration			1x2	1x2
EPRE ratio of PSS to SSS	1~4	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				

Table A.5.7.4.1.2-2: FR2 SSB based L1-RSRP OTA related test parameters

Parameter	Config	Unit	Test 1	Test 2 ^{NOTE 3}
-----------	--------	------	--------	--------------------------

			SSB0	SSB1	SSB0	SSB1
Angle of arrival configuration			Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 4}			Rough		Rough	
N_{oc}	1~4	dBm/15 kHz	-100		n.a.	
N_{oc}	1,2	dBm/SS	-91		n.a.	
	3,4	B SCS	-88		n.a.	
$\hat{E}_s / I_{ot}$	1~4	dB	10	-2	n.a.	
SSB_RP ^{Note1}	1,2	dBm/SC	-81	-93	As in Table B.2.4-2	
	3,4	S	-78	-90	As in Table B.2.4-2	
I_o ^{Note1}	1~4	dBm/95.04M Hz	-51.57		SSB_RP+28.98	
$\hat{E}_s / N_{oc}$	1~4	dB	10	-2	n.a.	
Note 1:	SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 2:	Void					
Note 3:	No additional noise is added by the test system in Test 2.					
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.5.7.4.1.3 Test Requirements

After 320ms from the beginning of the test, the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses 10.1.20.1. The following requirements are to be verified:

For Test 1:

Absolute accuracy of SSB0. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.7.4.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.1.2-1.

For Test 2:

Absolute accuracy of SSB resource reported by UE in L1-RSRP report (SSB0 or SSB1). The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.7.4.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.1.2-1.

Table A.5.7.4.1.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
SSB0	$SSB_RP0 - \bar{\delta} + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP0 + \bar{\delta} + G_{max}$
SSB1	$SSB_RP1 - \bar{\delta} + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP1 + \bar{\delta} + G_{max}$
Note 1: SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the SSB n under consideration Note 2: $\bar{\delta}$ is the RSRP absolute accuracy requirement from Table 10.1.20.1.1-1, selected according to the I_o used in the test Note 3: G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class	

A.5.7.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off

A.5.7.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.5.3 and clause 10.1.20.2 for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.5.7.4.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.5.7.4.2.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

Config	Description
1	LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.5.7.4.2.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.7.4.2.2-1 and Table A.5.7.4.2.2-2 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.5.7.4.2.2-1 and Table A.5.7.4.2.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.5.7.4.2.2-1: FR2 CSI-RS based L1-RSRP general test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~2		freq1	freq1
Duplex mode	1~2		TDD	TDD
TDD Configuration	1~2		TDDConf.3.1	TDDConf.3.1
BW _{channel}	1~2	MHz	100: N _{RB,c} = 66	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1~2		SSB.1 FR2	SSB.1 FR2
OCNG Patterns	1~2		OP.1	OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
TRS Configuration	1~2		TRS.2.1 TDD	TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2	TCI.State.2
SMTC configuration	1~2		SMTC.1	SMTC.1
CSI-RS	1~2		CSI-RS.3.2 TDD	CSI-RS.3.2 TDD
reportConfigType	1~2		periodic	periodic
reportQuantity	1~2		cri-RSRP	cri-RSRP
Number of reported RS	1~2		2	2
L1-RSRP reporting period	1~2		slot320	slot320
Propagation condition	1~2		AWGN	AWGN

Antenna configuraion	1~2		1x2	1x2
EPRE ratio of PSS to SSS	1~2	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				

Table A.5.7.4.2.2-2: FR2 CSI-RS based L1-RSRP OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 ^{NOTE 3}	
			CSI-RS0	CSI-RS1	CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 4}			Rough		Rough	
N_{oc}	1~2	dBm/15 kHz	-100		n.a.	
N_{oc}	1~2	dBm/SS B SCS	-91		n.a. n.a.	
$\hat{E}_s / I_{ot}$	1~2	dB	10	-2	n.a.	
CSI-RS-RSRP ^{Note1}	1~2	dBm/SC S	-81	-93	As in Table B.2.4-2	
I_o ^{Note1}	1~2	dBm/95.04M Hz	-59.86		SS-RSRP+28.98	
$\hat{E}_s / N_{oc}$	1~2	dB	-51.57	-2	n.a.	
Note 1: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 3: No additional noise is added by the test system in Test 2.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.5.7.4.2.3 Test Requirements

After 320ms from the beginning of the test, the L1-RSRP measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 2 shall fulfil the requirements in clauses 10.1.20.2. The following requirements are to be verified:

For Test 1:

Absolute accuracy of CSI-RS0. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.7.4.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

For Test 2:

Absolute accuracy of CSI-RS resource reported by UE in L1-RSRP report (CSI-RS0 or CSI-RS1). The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.5.7.4.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.5.7.4.2.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement ^{Notes 1,2,3}
CSI-RS0	$\text{CSI-RS_RP0} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP0} + \delta + G_{\max}$
CSI-RS1	$\text{CSI-RS_RP1} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP1} + \delta + G_{\max}$
Note 1:	CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the I_o used in the test
Note 3:	$G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.5.7.5 CLI measurements

A.5.7.5.1 EN-DC SRS-RSRP measurement accuracy with FR2 serving cell

A.5.7.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SRS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.22.1.1 with the testing configurations for NR cells in Table A.5.7.5.1.1-1.

Table A.5.7.5.1.1-1: Applicable NR configurations for FR2 SRS-RSRP accuracy test

Config	Description
1	LTE FDD, NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations in each supported band

A.5.7.5.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.7.5.1.2-1 and A.5.7.5.1.2-2 below. The test parameter for the (virtual) neighbor cell UE transmitting SRS are given in Table A.5.7.5.1.2-2.

Before the test UE is configured to perform SRS-RSRP measurement. During the test, the test system transmits SRS resources for measurement in the DL slots according to the SRS configuration in Table A.5.7.5.1.2-3. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 2 data symbols before SRS to be transmitted.

Table A.5.7.5.1.2-1: FR2 test parameters for SRS-RSRP accuracy

Parameter	Config	Unit	Test 1	Test 2
-----------	--------	------	--------	--------

SSB GSCN	1~2		freq1	freq1
Duplex mode	1~2		TDD	TDD
TDD configuration	1~2		TDDConf.3.1	TDDConf.3.1
BW _{channel}	1~2	MHz	100: N _{RB,c} = 66	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1~2		SSB.3 FR2	SSB.3 FR2
OCNG Patterns	1~2		OP.1	OP.1
TRS configuration	1~2		TRS.2.1 TDD	TRS.2.1 TDD
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1	SMTC.1
Time offset between DL from serving cell and SRS from test system	1~2	μs	10.76	10.67
EPRE ratio of PSS to SSS	1~2	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Propagation condition	1~2		AWGN	AWGN
Antenna configuration	1~2		1x2	1x2
SRS configuration	1~2		SRSCConf.1	SRSCConf.1
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.5.7.5.1.2-2: SRS-RSRP accuracy OTA related test parameters for PSCell and Neighbour cell UE in FR2

Parameter	Unit	T1	T2
Angle of arrival configuration		Setup 1 defined A.3.15.1	Setup 1 defined A.3.15.1
Beam assumption ^{Note 5}		Fine	Fine
N_{oc} ^{Note1}	dBm/15kHz _z ^{Note3}	-100	N/A
N_{oc} ^{Note1}	dBm/SCS _{Note3}	-91	N/A
$\hat{E}_s / N_{oc}$	dB	2	N/A
E_s	dBm/SCS _{Note3}		(Table B.2.7-2 Rx Beam Peak)
SRS_RP ^{Note2}	dBm/SCS	-89	(Table B.2.7-2 Rx Beam Peak)
$\hat{E}_s / I_{ot\ BB}$ ^{Note4}	dB	>1	1

$I_{0\text{Note2}}$	dBm/95.04 MHz ^{Note3}	-57.89	(Table B.2.7-2 Rx Beam Peak +50.79dB)
Note 1:	Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 2:	SRS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 3:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone		
Note 4:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 2dB for UE multi-band relaxation factor $\sum MB_P$ from TS 38.101-2 [19] Table 6.2.1.3-4.		
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.		

Table A.5.7.5.1.2-3: SRS configuration parameters for FR2 SRS-RSRP accuracy

	Field	SRSConf.1
SRS-ResourceSet	srs-ResourceSetId	0
	srs-ResourceIdList	0
	resourceType	Periodic
	Usage	Codebook
SRS-Resource	SRS-ResourceId	0
	nrofSRS-Ports	Port1
	transmissionComb	n2
	combOffset-n2	0
	cyclicShift-n2	0
	resourceMapping startPosition	0
	resourceMapping nrofSymbols	n1
	resourceMapping repetitionFactor	n1
	freqDomainPosition	0
	freqDomainShift	0
	freqHopping c-SRS	12
	freqHopping b-SRS	0
	freqHopping b-hop	0
	groupOrSequenceHopping	Neither
	resourceType	Periodic
	periodicityAndOffset-p	sl160,25
	sequenceId	0

A.5.7.5.1.3 Test Requirements

The SRS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.22.1.1. The following requirements are to be verified:

During T1:

The UE is deemed to meet the requirement if the reported SRS-RSRP is in the range shown in table A.5.7.5.1.3-1.

During T2:

The UE is deemed to meet the requirement if the reported SRS-RSRP is in the range shown in table A.5.7.5.1.3-1.

Table A.5.7.5.1.3-1: SRS-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
SRS	$\text{SRS_RP} - \delta + G_{\min} \leq \text{Reported SRS-RSRP(dBm)} \leq \text{SRS_RP} + \delta + G_{\max}$
Note 1:	SRS_RP is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.22.1.1-2, selected according to the I_o used in the test
Note 3:	$G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.5.7.5.2 EN-DC CLI-RSSI measurement accuracy with FR2 serving cell

A.5.7.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CLI-RSSI measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.22.2.1 with the testing configurations for NR cells in Table A.5.7.5.2.1-1.

Table A.5.7.5.2.1-1: Applicable NR configurations for FR2 CLI-RSSI accuracy test

Config	Description
1	LTE FDD, NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.5.7.5.2.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.7.5.2.2-1 and A.5.7.5.2.2-2 below.

Before the test UE is configured to perform CLI-RSSI measurement. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI resource and on 2 data symbol before. The CLI-RSSI measurement resource configuration is in Table A.5.7.5.2.2-3.

Table A.5.7.5.2.2-1: FR2 test parameters for CLI-RSSI accuracy

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~2		freq1	freq1
Duplex mode	1~2		TDD	TDD
TDD configuration	1~2		TDDConf.3.1	TDDConf.3.1
BW _{channel}	1~2	MHz	100: N _{RB,c} = 66	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1~2		SSB.3 FR2	SSB.3 FR2
OCNG Patterns ^{Note2}	1~2		OP.1	OP.1
TRS configuration	1~2		TRS.2.1 TDD	TRS.2.1 TDD
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1

Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
SMTTC configuration	1~2		SMTTC.1	SMTTC.1
Time offset between DL from serving cell and OCNG from test system	1~2	μs	10.67	10.67
EPRE ratio of PSS to SSS	1~2	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Propagation condition	1~2		AWGN	AWGN
Antenna configuration	1~2		1x2	1x2
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: OCNG is not transmitted in the CLI-RSSI measurement resources.				

Table A.5.7.5.2.2-2: CLI-RSSI accuracy OTA related test parameters

Parameter	Unit	T1	T2
Angle of arrival configuration		Setup 1 defined A.3.15.1	
Beam assumption ^{Note 5}		Fine	
N_{oc} on CLI-RSSI measurement resource ^{Note1}	dBm/15kHz z_{Note3}	-100	
N_{oc} on CLI-RSSI measurement resource ^{Note1}	dBm/SCS ^{N_{ote3}}	-91	
$\hat{E}_s/N_{oc}$ on CLI-RSSI measurement resource	dB	-Infinity	
RSRP on CLI-RSSI measurement resource ^{Note2}	dBm/SCS	-Infinity	
$\hat{E}_s/I_{\text{ot BB}}$ on CLI-RSSI measurement resource ^{Note4}	dB	-Infinity	
Io on CLI-RSSI measurement resource ^{Note2}	dBm/95.04 MHz ^{Note3}	-62.01	
Io on CLI-RSSI measurement resource ^{Note2}	dBm/1.08 MHz	-81.46	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: SRS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone			

- Note 4: Calculation of $E_s/\text{IoT}_{\text{BB}}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 2dB for UE multi-band relaxation factor ΣMBP from TS 38.101-2 [19] Table 6.2.1.3-4.
- Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

Table A.5.7.5.2.2-3: CLI-RSSI measurement resource configuration for FR2 CLI-RSSI accuracy

	Field	SRSCnf.1
CLI-RSSI measurement resource	rss-ResourceId	0
	rss-SCS	120kHz
	startPRB	0
	nrofPRBs	66
	startPosition	3
	nrofSymbols	11
	rss-PeriodicityAndOffset	sl160, 25

A.5.7.5.2.3 Test Requirements

The CLI-RSSI measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.22.2.1. The following requirements are to be verified:

During T1:

The UE is deemed to meet the requirement if the reported CLI-RSSI is in the range shown in table A.5.7.5.2.3-1.

During T2:

The UE is deemed to meet the requirement if the reported CLI-RSSI is in the range shown in table A.5.7.5.2.3-1..

Table A.5.7.5.2.3-1: CLI-RSSI absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
	$I_o - \delta + G_{\min} \leq \text{Reported CLI-RSSI(dBm)} \leq I_o + \delta + G_{\max}$
Note 1:	I_o is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for 1.08MHz
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.22.1.1-2, selected according to the I_o used in the test
Note 3:	$G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.5.7.6 L1-SINR measurement for beam reporting

A.5.7.6.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off

A.5.7.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.8.4.1 and clause 10.1.28.1 for FR2 L1-SINR measurements based on CSI-RS with the testing configurations for NR cells in Table A.5.7.6.1.1-1, which configures the measurement resources for the CSI-RS based CMR and no dedicated IMR.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.5.7.6.1.1-1: Applicable NR configurations for FR2 L1-SINR test with CSI-RS based CMR and no dedicated IMR configured

Config	Description
1	LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.5.7.6.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR2 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.7.6.1.2-1 and Table A.5.7.6.1.2-2 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.5.7.6.1.2-1 and Table A.5.7.6.1.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.5.7.6.1.2-1: FR2 CSI-RS based L1-SINR general test parameters

Parameter	Config	Unit	Test 1
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
BW _{channel}	1~2	MHz	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1~2		SSB.1 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
SMTC configuration	1~2		SMTC.1
CSI-RS	1~2		CSI-RS.3.2 TDD
reportConfigType	1~2		periodic
reportQuantity-r16	1~2		cri-SINR-r16
nrofReportedRS	1~2		2
L1-SINR reporting period	1~2		slot640
Propagation condition	1~2		AWGN
Antenna configuration	1~2		1x2
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			

EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Table A.5.7.6.1.2-2: FR2 CSI-RS based L1-SINR OTA related test parameters

Parameter	Config	Unit	Test 1	
			CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 4}			Rough	
N_{oc}	1~2	dBm/15 kHz	-100	
N_{oc}	1~2	dBm/SSB SCS	-91	
$\hat{E}_s / I_{ot}$	1~2	dB	10	-2
CSI-RS-RSRP ^{Note1}	1~2	dBm/SCS	-81	-93
I_o ^{Note1}	1~2	dBm/95.04MHz	-51.57	-59.86
$\hat{E}_s / N_{oc}$	1~2	dB	10	-2
Note 1: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: Void. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.7.6.1.3 Test Requirements

After 640ms from the beginning of the test, the L1-SINR measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 2 shall fulfil the requirements in clauses 10.1.28.1. The following requirements are to be verified:

For Test 1:

Absolute accuracy of CSI-RS0. The UE is deemed to meet the requirement if the reported L1-SINR is in the range shown in Table A.5.7.6.1.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the reported differential L1-SINR meets is in the range shown in Table A.5.7.6.1.3-2.

Table A.5.7.6.1.3-1: L1-SINR absolute accuracy test requirement

	Test requirement ^{Notes1,2}
CSI-RS0	$L1-SINR0 - \delta \leq \text{Reported SINR(dB)} \leq L1-SINR0 + \delta$
Note 1:	L1-SINR0 is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS 0 under consideration
Note 2:	δ is the SINR absolute accuracy requirement from Table 10.1.28.1.1-1, selected according to the I_0 used in the test

Table A.5.7.6.1.3-2: L1-SINR relative accuracy test requirement

	Test requirement ^{Notes1,2}
CSI-RS0 - CSI-RS1	$L1-SINR0 - L1-SINR1 - \sigma \leq \text{Reported DIFFSINR (dB)} \leq L1-SINR0 - L1-SINR1 + \sigma$
Note 1:	L1-SINRn is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration
Note 2:	σ is the SINR relative requirement from Table 10.1.28.1.2-1, selected according to the I_0 used in the test

A.5.7.6.2 L1-SINR measurement with SSB based CMR and dedicated IMR

A.5.7.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 9.8.4.2 and clause 10.1.28.2 for L1-SINR measurements with SSB based CMR and dedicated CSI-RS based IMR, with the testing configurations for NR cells in Table A.5.7.6.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.5.7.6.2.1-1: Applicable NR configurations for FR2 L1-SINR measurement test with SSB based CMR and CSI-RS based IMR

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations in each supported band

A.5.7.6.2.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.7.6.2.2-1 and Table A.5.7.6.2.2-2 below. The absolute accuracy of L1-SINR measurements are tested by using the parameters in Table A.5.7.6.2.2-1 and Table A.5.7.6.2.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources and one CSI-RS resource set with two CSI-RS resource. UE is configured to perform RLM and BFD measurement based on the SSB resources 0 and 1. UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-RS resources as IMR.

Table A.5.7.6.2.2-1: FR2 L1-SINR measurement test parameters with SSB based CMR and CSI-RS based IMR

Parameter	Config	Unit	Test 1
SSB GSCN	1~4		freq1
Duplex mode	1~4		TDD

TDD Configuration	1~4		TDDConf.3.1
BW _{channel}	1~4	MHz	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1~4		SR.3.1 TDD
RMSI CORESET Reference Channel	1~4		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~4		CCR.3.1 TDD
SSB configuration	1,2		SSB.1 FR2
	3,4		SSB.2 FR2
CSI-RS configuration	1~4		CSI-RS 3.1A TDD
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.3 ULBWP.1.3
TRS Configuration	1~4		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~4		TCI.State.2
SMTC configuration	1~4		SMTC.1
reportConfigType	1~4		periodic
reportQuantity-r16	1~4		ssb-Index-SINR-r16
Number of reported RS	1~4		2
L1-SINR reporting period	1~4		slot640
Propagation condition	1~4		AWGN
Antenna configuration	1~4		1x2
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Table A.5.7.6.2.2-2: FR2 SSB specific test parameters

Parameter	Config	Unit	Test 1	
			SSB#0	SSB#1
Angle of arrival configuration			Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 4}			Rough	
N_{oc}	1~4	dBm/15 kHz	-100	
N_{oc}	1,2		-91	

	3,4	dBm/SSB SCS	-88	
$\hat{E}_s / I_{\alpha}$	1~4	dB	10	0
SSB RSRP ^{Note1}	1,2	dBm/SCS	-81	-91
	3,4	S	-78	-88
I_{α} ^{Note1}	1~4	dBm/95.04MHz	-51.57	-58.97
$\hat{E}_s / N_{oc}$	1~4	dB	10	0
Note 1: RSRP and I_{α} levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

Table A.5.7.6.2.2-3: FR2 CSI-RS specific test parameters

Parameter	Config	Unit	Test 1	
			CSI-RS#0	CSI-RS#1
Angle of arrival configuration			Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 4}			Rough	
N_{oc}	1~4	dBm/15kHz	-100	
N_{oc}	1~4	dBm/CSI-RS SCS	-91	
$\hat{E}_s / I_{\alpha}$	1~4	dB	10	0
CSI-RS RSRP ^{Note1}	1~4	dBm/SCS	-81	-91
I_{α} ^{Note1}	1~4	dBm/95.04MHz	-51.57	-58.97
$\hat{E}_s / N_{oc}$	1~4	dB	10	0
Note 1: RSRP and I_{α} levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.7.6.2.3 Test Requirements

After 640ms from the beginning of the test, the L1-SINR measurement accuracy for SSB#0+CSI-RS#0 and SSB#1+CSI-RS#1 of Cell 2 shall fulfil the requirements in clauses 10.1.28.2. The following requirements are to be verified:

For Test 1:

Absolute accuracy of SSB#0+CSI-RS#0. The UE is deemed to meet the requirement if the reported L1-SINR is in the range shown in Table A.5.7.6.2.3-1.

Relative accuracy of SSB#0+CSI-RS#0 compared with SSB#1+CSI-RS#1. The UE is deemed to meet the requirement if the reported differential L1-SINR is in the range shown in Table A.5.7.6.2.3-2.

Table A.5.7.6.2.3-1: L1-SINR absolute accuracy test requirement

	Test requirement ^{Notes1,2}
SSB#0+CSI-RS#0	$L1_SINR0 - \delta + \leq \text{Reported SINR (dB)} \leq L1_SINR0 + \delta$

Note 1:	L1_SINR0 is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the SSB#0+CSI-RS#0 under consideration
Note 2:	δ is the SINR absolute accuracy requirement from Table 10.1.28.2.1-1, selected according to the I_o used in the test

Table A.5.7.6.2.3-2: L1-SINR relative accuracy test requirement

	Test requirement ^{Notes1,2}
SSB#0+CSI-RS#0 - SSB#1+CSI-RS#1	$L1-SINR0 - L1-SINR1 - \sigma \leq \text{Reported DIFFSINR (dB)} \leq L1-SINR0 - L1-SINR1 + \sigma$
Note 1:	L1-SINRn is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the SSB#n+CSI-RS#n under consideration
Note 2:	σ is the SINR relative requirement from Table 10.1.28.2.2-1, selected according to the I_o used in the test

A.5.7.6.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR

A.5.7.6.3.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will partly verify the requirements in Clauses 9.8.4.3 and clause 10.1.28.3 for L1-SINR measurements based on CSI-RS as CMR and CSI-IM as IMR with the testing configurations for NR cells in Table A.5.7.6.3.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.5.7.6.3.1-1: Applicable NR configurations for FR2 L1-SINR measurement test with CSI-RS based CMR and CSI-IM based IMR

Config	Description
1	LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations in each supported band

A.5.7.6.3.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2). The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 are given in Table A.5.7.6.3.2-1 and A.5.7.6.3.2-2 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.5.7.6.3.2-1 and A.5.7.6.3.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources and one CSI-IM resource set with two CSI-IM resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB. UE is configured to perform L1-SINR measurement based on the configured CSI-RS as CMR and CSI-IM as IMR.

Table A.5.7.6.3.2-1: FR2 L1-SINR measurement test with CSI-RS based CMR and CSI-IM based IMR

Parameter	Config	Unit	Test 1
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
BW _{channel}	1~2	MHz	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD

Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1~2		SSB.1 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
SMTc configuration	1~2		SMTc.1
CSI-RS configuration as CMR	1~2		CSI-RS.3.2 TDD
CSI-IM configuration as IMR	1~2		CSI-IM.3.3 TDD
reportConfigType	1~2		periodic
reportQuantity-r16	1~2		cri-SINR-r16
nrofReportedRS	1~2		2
L1-SINR reporting period	1~2		slot640
Propagation condition	1~2		AWGN
Antenna configuraion	1~2		1x2
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Table A.5.7.6.3.2-2: FR2 CSI-RS based L1-SINR measurement OTA related test parameters

Parameter	Config	Unit	Test 1	
			CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 4}			Rough	
N_{oc}	1~2	dBm/15 kHz	-100	
N_{oc}	1~2	dBm/SS B SCS	-91	
$\hat{E}_s/I_{at}$	1~2	dB	10	-2
CSI-RS-RSRP ^{Note1}	1~2	dBm/SC S	-81	-93

$I_{o, \text{Note1}}$	1~2	dBm/ 95.04M Hz	-51.57	-59.86
$\hat{E}_s / N_{oc}$	1~2	dB	10	-2
Note 1: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: No additional noise is added by the test system in Test 2. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.7.6.3.3 Test Requirements

After 640ms from the beginning of the test, the L1-SINR measurement accuracy for CSI-RS#0+CSI-IM#0 and CSI-RS#1+CSI-IM#1 of Cell 2 shall fulfil the requirements in clauses 10.1.28.3. The following requirements are to be verified:

Absolute accuracy of CSI-RS#0+CSI-IM#0. The UE is deemed to meet the requirement if the reported L1-SINR is in the range shown in Table A.5.7.6.3.3-1.

Relative accuracy of CSI-RS#0+CSI-IM#0 compared with CSI-RS#1+CSI-IM#1. The UE is deemed to meet the requirement if the reported differential L1-SINR is in the range shown in Table A.5.7.6.3.3-2.

Table A.5.7.6.3.3-1: L1-SINR absolute accuracy test requirement

	Test requirement ^{Notes1,2}
CSI-RS#0+CSI-IM#0	$L1\text{-}SINR0 - \delta \leq \text{Reported SINR(dBm)} \leq L1\text{-}SINR0 + \delta$
Note 1:	L1-SINR0 is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS#0 under consideration
Note 2:	δ is the SINR absolute accuracy requirement from Table 10.1.28.3.1-2.

Table A.5.7.6.3.3-2: L1-SINR relative accuracy test requirement

	Test requirement ^{Notes1,2}
CSI-RS#0+CSI-IM#0 - CSI-RS#1+CSI-IM#1	$L1\text{-}SINR0 - L1\text{-}SINR1 - \sigma \leq \text{Reported DIFFSINR (dB)} \leq L1\text{-}SINR0 - L1\text{-}SINR1 + \sigma$
Note 1:	L1-SINRn is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS#n+CSI-IM#n under consideration
Note 2:	σ is the SINR relative requirement from Table 10.1.28.3.2-2, selected according to the I_o used in the test

A.5.7.7 CSI-RSRP

A.5.7.7.1 EN-DC intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.5.7.7.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RS based RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.3.1.1 and 10.1.3.1.2 for intra-frequency measurements.

A.5.7.7.1.2 Test parameters

In this set of test cases, all NR cells are on the same carrier frequency. Supported test configurations are shown in Table A.5.7.7.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by

using the parameters in Table A.5.7.7.1.2-2 and A.5.7.7.1.2-3. The E-UTRA PCell is configured as specified in clause A.3.7.2.2. In all test cases, cell 1 is the PCell, cell 2 is the PSCell and cell 3 is the target cell. The test consists of two time phases T1 and T2.

Table A.5.7.7.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 120KHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB SCS, 120KHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.7.7.1.2-2: CSI-RSRP Intra frequency general test parameters

Parameter ^{Note 5}	Unit	T1		T2	
		Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Reference Channel		CCR.3. 1 TDD	-	CCR.3. 1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC. 1	SMTC. 1	SMTC. 1	SMTC. 1
CSI-RS configuration for RRM		CSI- RS.RR M.FR2. 1 TDD	CSI- RS.RR M.FR2. 1 TDD	CSI- RS.RR M.FR2. 1 TDD	CSI- RS.RR M.FR2. 1 TDD
Time offset with Cell 2	μs	-	0.58	-	0.58
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Void					
Note 3: Void					
Note 4: Void					
Note 5: All parameters apply for configuration 1 and 2					

Note 6: Void

Table A.5.7.7.1.2-3: CSI-RSRP Intra frequency OTA related test parameters

Parameter	Unit	T1		T2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 8}		Rough			
N_{oc} ^{Note1}	dBm/15kHz _z ^{Note4}	-91.6		N/A	
N_{oc} ^{Note1}	dBm/SCS _{Note4}	-82.6		N/A	
$\hat{E}_s/N_{oc}$ for SSB	dB	6.0	1.0	N/A	N/A
$\hat{E}_s/N_{oc}$ for CSI-RS	dB	6.0	1.0	N/A	N/A
E _s for SSB	dBm/SCS _{Note4}			(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
E _s for CSI-RS	dBm/SCS _{Note4}			(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
SSB_RP ^{Note2}	dBm/SCS	-76.6	-81.6	(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
$\hat{E}_s/I_{ot\ BB}$ ^{Note6} for SSB	dB	2.44	-5.98	-5.98	-5.98
$\hat{E}_s/I_{ot\ BB}$ ^{Note6} for CSI-RS	dB	2.44	-5.98	-5.98	-5.98
CSI_RP	dBm/SCS	-76.6	-81.6	(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
I _o ^{Note2}	dBm/95.04 MHz _{Note4}	-50.05		(Table B.2.2-2 Rx Beam Peak +29.70dB)	
Note 1:	Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2:	SSB_RP, E _s /I _{ot} and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	Void				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	Void				

Note 6:	Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7:	All parameters apply for configurations 1 and 2
Note 8:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.5.7.7.1.3 Test Requirements

The CSI-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.3.1.1 and relative accuracy requirements in clause 10.1.3.1.2. The following requirements are to be verified:

During T1:

- Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in table A.5.7.6.1.3-1.
- Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 10.1.3.1.2-1.

During T2:

- Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in table A.5.7.6.1.3-1.
- Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 10.1.3.1.2-1.

During T1 and T2:

- Relative accuracy of Cell 2 during T2 compared with Cell 2 during T1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 10.1.3.1.2-1
- Relative accuracy of Cell 3 during T2 compared with Cell 3 during T1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 10.1.3.1.2-1.

Table A.5.7.7.1.3-1: CSI-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
Cell 2	$CSI_RP2 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq CSI_RP2 + \delta + G_{max}$
Cell 3	$CSI_RP3 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq CSI_RP3 + \delta + G_{max}$
Note 1:	CSI_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.3.1.1-1, selected according to the I_o used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.5.7.7.2 EN-DC inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.5.7.7.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RS based RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.5.3.1 and 10.1.5.3.2 for inter-frequency measurements with the testing configurations for NR cells in Table A.5.7.2.1-1.

Table A.5.7.7.2.1-1: Applicable NR configurations for FR2 inter-frequency CSI-RSRP accuracy test

Configuration	Description
1	FDD LTE PCell, cells 2&3 120 kHz SSB SCS, 120KHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, cells 2&3 120 kHz SSB SCS, 120KHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

A.5.7.7.2.2 Test parameters

In this set of test cases, there are three cells in the test, E-UTRAN PCell (Cell 1), FR2 PCell (Cell 2) and a FR2 neighbour cell (Cell 3) on a different frequency than the PCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.5.7.7.2.2-1 and Table A.5.7.7.2.2-2 below. Both absolute and relative accuracy of RSRP intrer-frequency measurements are tested by using the parameters in Table A.5.7.7.2.2-1 and Table A.5.7.7.2.2-2. The inter-frequency measurements are supported by a measurement gap.

Table A.5.7.7.2.2-1: CSI-RSRP inter-frequency general test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID			489	0	489	0
SSB ARFCN	1,2		freq1	freq2	freq1	freq2
BW _{channel}	1,2		100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Gap pattern ID			0		0	
Duplex mode	1,2		TDD	TDD	TDD	TDD
TDD configuration	1,2		TDDConf.3.1		TDDConf.3.1	
PDSCH Reference measurement channel	1,2		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel	1,2		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Reference Channel	1,2		CCR.3.1 TDD	-	CCR.3.1 TDD	-
SSB configuration	1,2		SSB.3 FR2		SSB.3 FR2	
OCNG Patterns	1,2		OP.3		OP.3	
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1,2		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration	1,2		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration	1,2		TCI.State.2		TCI.State.2	
SMTTC configuration	1,2		SMTTC.1		SMTTC.1	
CSI-RS configuration for RRM	1,2		CSI-RS.RRM.3 .1 TDD	CSI-RS.RRM.3 .2 TDD	CSI-RS.RRM.3 .1 TDD	CSI-RS.RRM.3 .2 TDD
Time offset between Cell 2 and Cell 3	1,2	µs	0.58		0.58	
EPRE ratio of PSS to SSS	1,2	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						

EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
Propagation condition	1,2	-	AWGN	AWGN	AWGN	AWGN
Antenna configuration	1,2	-	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void						

Table A.5.7.7.2.2-2: CSI-RSRP inter-frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 4b according to clause A.3.15.4.2		Setup 4b according to clause A.3.15.4.2	
		AoA1 Spherical coverage	AoA2 Rx Beam Peak	AoA1 Spherical coverage	AoA2 Rx Beam Peak
Assumption for UE beams ^{Note 7}		Rough	Rough	Assumption for UE beams ^{Note 7}	
N_{oc} ^{Note1}	dBm/15kHz _z ^{Note4}	-90.6	-90.6	(Table B.2.3-2 Rx Beam Peak +1.97dB)	(Table B.2.3-2 Rx Beam Peak -3.03dB)
N_{oc} ^{Note1}	dBm/SCS _{Note4}	-81.6	-81.6	(Table B.2.3-2 Rx Beam Peak +11.0dB)	(Table B.2.3-2 Rx Beam Peak +6.0dB)
$\hat{E}_s/N_{oc}$ for SSB	dB	6.0	6.0	17.0	-1.0
$\hat{E}_s/N_{oc}$ for CSI-RS	dB	6.0	6.0	17.0	-1.0
SSB_RP ^{Note2}	dBm/SCS	-75.60	-75.60	(Table B.2.3-2 Rx Beam Peak +28.0dB)	(Table B.2.3-2 Rx Beam Peak +5.0dB)
(SSB_RP _{Cell 1} – SSB_RP _{Cell 2})	dB	0		23.00	
$\hat{E}_s/I_{ot\ BB}$ ^{Note6} for SSB	dB	5.29	5.96	8.86	-3.92
$\hat{E}_s/I_{ot\ BB}$ ^{Note6} for CSI-RS	dB	5.29	5.96	8.86	-3.92
CSI_RP	dBm/SCS	-75.60	-75.60	(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)

$I_{o\text{Note}2}$	$\text{dBm}/95.04\text{ MHz}$ Note4	-50.03	-50.03	(Table B.2.3-2 Rx Beam Peak +52.68dB)	(Table B.2.3-2 Rx Beam Peak +33.13dB)
$(I_{o\text{freq } 1} - I_{o\text{freq } 2})$	dB	0		19.55	
Note 1:	Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2:	SSB_RP, Es/Iot, Io, (SSB_RP _{Cell 2} – SSB_RP _{Cell 1}) and (Io _{freq 2} – Io _{freq 1}) levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	Void				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	Void				
Note 6:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P or ΔMB _S from TS 38.101-2 [19] Table 6.2.1.3-4.				
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.7.7.2.3 Test Requirements

The CSI-RSRP measurement accuracy for Cell 2 and Cell 3 shall fulfil the absolute requirements in clause 10.1.5.3.1 and the relative requirements in clause 10.1.5.3.2.

Test 1:

- Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in Table A.5.7.7.2.3-1.
- Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table A.5.7.7.2.3-2.

Test 2:

- Absolute accuracy of Cell 2 and absolute accuracy of Cell 3. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in Table A.5.7.7.2.3-1.
- Relative accuracy of Cell 3 compared with Cell 2. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table A.5.7.7.2.3-2.

Table A.5.7.7.2.3-1: CSI-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3,4}
Cell 2	$CSI_RP2 - \delta + G_{\min} + X \leq \text{Reported RSRP(dBm)} \leq CSI_RP2 + \delta + G_{\max}$
Cell 3	$CSI_RP3 - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq CSI_RP3 + \delta + G_{\max}$
Note 1:	CSI_RP _n is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.5.1.1-1, selected according to the I_o used in the test
Note 3:	$G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.

Table A.5.7.7.2.3-2: CSI-RSRP relative accuracy test requirement

Cell 3 – Cell 2	Test requirement ^{Notes1,2,3,4} $\text{CSI_RP3} - \text{CSI_RP2} - \delta - D - G_{\text{inter}} \leq \text{Reported RSRP(dB)} \leq \text{CSI_RP3} - \text{CSI_RP2} + \delta + G_{\text{inter}} - (X) + E$
Note 1:	CSI_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP relative accuracy requirement from Table 10.1.5.1.2-1
Note 3:	Void
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.
Note 5:	D is the margin due to mis-alignment between fine beam and rough beam. D is the Rough Beam gain reduction in Rx beam peak direction from Table B.2.1.5.3-1, selected according to the UE power class. D is always a positive value.
Note 6:	G_{inter} is the margin due to different antenna gain caused by frequency separation. G_{inter} is from Table B.2.1.5.2-1, selected according to the UE power class, and is always a positive value.
Note 7:	E = 3 (dB) is an additional margin to account for the actual gain difference between peak direction and spherical coverage using rough beams.

A.5.7.8 CSI-RSRQ

A.5.7.8.1 EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell

A.5.7.8.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.8 for inter-frequency measurement.

A.5.7.8.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.5.7.8.1.2-1. The absolute accuracy of CSI-RSRQ intra-frequency measurement is test by using the parameters in Table A.5.7.8.1.2-2. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1.

Table A.5.7.8.1.2-1: CSI-RSRQ Intra frequency CSI-RSRQ supported test configurations

Config	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB&CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB&CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.5.7.8.1.2-2: CSI-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			Freq1		Freq1	
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DL BWP 1.1			

	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD		TRS.2.1 TDD	
CSI-RS configuration for RRM			CSI-RS.RRM.FR2.1 TDD			
TCI state			TCI.State .0		TCI.State .0	
PDSCH Reference measurement channel			SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC			CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns			OP.1	OP.1	OP.1	OP.1
SMTC configuration			SMTC.1			
SSB configuration			SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
Time offset with Cell 2	μs		-	0.58	-	0.58
PDSCH/PDCCH subcarrier spacing	kHz		120	120	120	120
SS-RSSI-Measurement			Not Applicable			
EPRE ratio of PSS to SSS	dB		0	0	0	0
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: CSI-RSRQ, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: CSI-RSRQ and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: Void						

Table A.5.7.8.1.2-3: CSI-RSRQ Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 9}		Rough			
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-95		-95	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-86		-86	
$\hat{E}_s / N_{oc}$ for SSB	dB	3	3	-3	-3
$\hat{E}_s / N_{oc}$ for CSI-RS	dB	3	3	-3	-3
CSI-RSRP ^{Note2}	dBm/SCS ^{Note4}	-83	-83	-89	-89
CSI-RSRQ ^{Note2}	dB	-14.77	-14.77	-16.81	-16.81

$\hat{E}_s/I_{ot}$ for SSB	dB	-1.76	-1.76	-4.76	-4.76
$\hat{E}_s/I_{ot}$ for CSI-RS	dB	-1.76	-1.76	-4.76	-4.76
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-50		-54	-54
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2:	CSI-RSRQ, CSI-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	CSI-RSRQ and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone				
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone				
Note 6:	NR operating band groups are as defined in Clause 3.5.2.				
Note 7:	Void				
Note 8:	Void				
Note 9:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.5.7.8.1.3 Test Requirements

The CSI-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal CSI-RSRQ +2.5dB to Nominal CSI-RSRQ –3.5dB and the CSI-RSRQ measurement accuracy in test 2 shall be within the range Nominal CSI-RSRQ +3.5dB to Nominal CSI-RSRQ –4.5dB according to the requirements in clause 10.1.8 with an additional -1dB margin reflecting the possible impact of UE self-noise in the test. Nominal CSI-RSRQ is the value shown in table A.5.7.8.1.2-3.

A.5.7.8.2 EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.8.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.10 for inter-frequency measurement.

A.5.7.8.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.5.7.8.2.2-1. Both absolute accuracy and relative accuracy requirements of CSI-RSRQ inter-frequency measurement are tested by using test setup in Table A.5.7.8.2.2-2 and Table A.5.7.8.2.2-3. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.5.7.8.2.2-1: CSI-RSRQ Inter frequency CSI-RSRQ supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB&CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB&CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Table A.5.7.8.2.2-2: CSI-RSRQ Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		Freq1	freq2	freq1	Freq2
Duplex mode		TDD		TDD	

TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTc configuration		SMTc.1	SMTc. 1	SMTc. 1	SMTc. 1
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD			
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
Time offset with Cell 2	μs	-	0.58	-	0.58
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3:	CSI-RSRQ, CSI-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4:	CSI-RSRQ and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

Table A.5.7.8.2.2-3: CSI-RSRQ Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
AoA setup		Setup 1 in clause A.3.15		Setup 1 in clause A.3.15	
Assumption for UE beams ^{Note 8}		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-94.03		-94.03	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-85.0		-85.0	
$\hat{E}_s / N_{oc}$ for SSB	dB	-1.75	-1.75	-3	-3
$\hat{E}_s / N_{oc}$ for CSI-RS	dB	-1.75	-1.75	-3	-3
CSI-RP ^{Note2}	dBm/SCS ^{Note4}	-86.75	-86.75	-88	-88
CSI-RSRQ ^{Note2}	dB	-14.75	-14.75	-15.56	-15.56
$\hat{E}_s / I_{ot}$ for SSB	dB	-1.75	-1.75	-3	-3
$\hat{E}_s / I_{ot}$ for CSI-RS	dB	-1.75	-1.75	-3	-3
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-53.8	-53.8	-54.25	-54.25
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					

- | | |
|---------|---|
| Note 2: | CSI-RSRQ, CSI-RP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 3: | CSI-RSRQ and CSI-RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 4: | Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone |
| Note 5: | As observed with 0dBi gain antenna at the centre of the quiet zone |
| Note 6: | Void |
| Note 7: | Void |
| Note 8: | Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation |

A.5.7.8.2.3 Test Requirements

The CSI-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal CSI-RSRQ +2.5dB to Nominal CSI-RSRQ -3.5dB and the CSI-RSRQ measurement accuracy in test 2 shall be within the range Nominal CSI-RSRQ +3.5dB to Nominal CSI-RSRQ -4.5dB according to the requirements in clause 10.1.10 with an additional -1dB margin reflecting the possible impact of UE self-noise in the test.

The CSI-RSRQ relative measurement accuracy shall fulfil the requirements in clause 10.1.10.

A.5.7.9 CSI-SINR

A.5.7.9.1 EN-DC Intra-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.9.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.13.2.1.

A.5.7.9.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.5.7.9.1.2-1. The absolute accuracy of CSI-SINR intra-frequency measurement is test by using the parameters in Table A.5.7.9.1.2-2 and Table A.5.7.9.1.2-3. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7.2.1. In all test cases, Cell 2 is the PCell and Cell 3 is the target cell.

Table A.5.7.9.1.2-1: CSI-SINR Intra frequency CSI-SINR supported test configurations

Configuration	Description
1	FDD LTE PCell, Cell 2&3 120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	TDD LTE PCell, Cell 2&3 120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.5.7.9.1.2-2: CSI-SINR Intra frequency test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		Freq2		Freq2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66	

Downlink initial BWP configuration		DLBWP.0.1			
Downlink dedicated BWP configuration		DLBWP.1.1			
Uplink initial BWP configuration		ULBWP.0.1			
Uplink dedicated BWP configuration		ULBWP.1.1			
DRX cycle configuration	ms	Not applicable			
TRS configuration		TRS.2.1 TDD			
TCI state		TCI.State.0			
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated RMSI CORESET Reference Channel		CCR.3 .1 TDD	-	CCR.3. 1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
CSI-RS for mobility		-	CSI- RS.RR M.FR2. 1 TDD	-	CSI- RS.RR M.FR2. 1 TDD
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
Time offset with Cell 2	μs	-	0.29	-	0.29
CSI-RSSI-Measurement		Not Applicable			
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: CSI-SINR, CSI-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					

Table A.5.7.9.1.2-3: CSI-SINR Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 7}		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-105		N/A	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-96		N/A	
$\hat{E}_s / N_{oc}$ for SSB	dB	4.54	2.66	-3	-3

$\hat{E}_s / N_{oc}$ for CSI-RS	dB	4.54	2.66	-3	-3
CSI-RSRP ^{Note2}	dBm/SCS ^{Note4}	-91.46	-93.34	-99	-99
CSI-SINR ^{Note2}	dB	0	-3.2	-4.76	-4.76
$\hat{E}_s / I_{ot}$ for SSB	dB	0	-3.2	-4.76	-4.76
$\hat{E}_s / I_{ot}$ for CSI-RS	dB	0	-3.2	-4.76	-4.76
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-59.2		-64	
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: CSI-SINR, CSI-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone					
Note 6: NR operating band groups are as defined in Clause 3.5.2.					
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.5.7.9.1.3 Test Requirements

The CSI-SINR absolute measurement accuracy in test 1 shall be within the range Nominal CSI-SINR+3dB to Nominal CSI-SINR -4dB and the CSI-SINR measurement accuracy in test 2 shall be within the range Nominal CSI-SINR +3.5dB to Nominal CSI-SINR -4.5dB according to the requirements in clause 10.13.2 with an additional -1dB margin reflecting the possible impact of UE self noise in the test. Nominal CSI-SINR is the value shown in table A.5.7.9.1.2-3.

A.5.7.9.2 EN-DC Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.5.7.9.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.15.2.1 and 10.1.15.2.2 for inter-frequency measurement.

A.5.7.9.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.5.7.9.2.2-1. Both absolute accuracy and relative accuracy requirements of CSI-SINR inter-frequency measurement are tested by using test setup in Table A.5.7.9.2.2-2 and Table A.5.7.9.2.2-3. In all test cases, Cell 2 is the PSCell and Cell 3 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.5.7.9.2.2-1: CSI-SINR Inter frequency CSI-SINR supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Table A.5.7.9.2.2-2: CSI-SINR Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN		Freq1	freq2	freq1	Freq2	freq1	Freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Downlink initial BWP configuration		DLBWP.0.1					
Downlink dedicated BWP configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
DRX cycle configuration	ms	Not applicable					
TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3. 1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3. 1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1	OP.1	OP.1
Time offset with cell 2	μs	-	0.29	-	0.29	-	0.29
SMTc configuration		SMTc. 1	SMTc. 1	SMTc. 1	SMTc. 1	SMT C.1	SMTc. 1
CSI-RS for mobility		-	CSI- RS.RR M.FR2. 1 TDD	-	CSI- RS.RR M.FR2. 1 TDD	-	CSI- RS.RR M.FR2. 1 TDD
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG DMRS to SSS ^{Note 1}							
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: CSI-SINR, CSI-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							

Table A.5.7.9.2.2-3: CSI-SINR Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Angle of arrival configuration	degrees	Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 7}		Rough		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-105		-105		-105	

N_{oc} Note1	dBm/SCS Note3	-96		-96		-96	
$\hat{E}_s / N_{oc}$ for SSB	dB	-0.5	-0.5	11.0	11.0	-3.0	-3.0
$\hat{E}_s / N_{oc}$ for CSI-RS	dB	-0.5	-0.5	11.0	11.0	-3.0	-3.0
CSI-RSRP ^{Note2}	dBm/SCS Note4	-96.5	-96.5	-85	-85	-99	-99
CSI-SINR ^{Note2}	dB	-0.5	-0.5	11	11	-3.0	-3.0
$\hat{E}_s / I_{ot}$ for SSB	dB	-0.5	-0.5	11	11	-3.0	-3.0
$\hat{E}_s / I_{ot}$ for CSI-RS	dB	-0.5	-0.5	11	11	-3.0	-3.0
Io ^{Note2}	dBm/95.04 MHz Note4	-69.3		-55.4		-65.24	
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 2:	CSI-SINR, CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 3:	CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone						
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone						
Note 6:	NR operating band groups are as defined in Clause 3.5.2.						
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.5.7.9.2.3 Test Requirements

The CSI-SINR absolute measurement accuracy in test 1 shall be within the range Nominal CSI-SINR+3dB to Nominal CSI-SINR -4dB and the CSI-SINR measurement accuracy in test 2 shall be within the range Nominal CSI-SINR+3.5dB to Nominal CSI-SINR -4.5dB according to the requirements in clause 10.1.15.2.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test. Nominal CSI-SINR is the value shown in table A.5.7.2.2.2-3

The CSI-SINR relative measurement accuracy shall fulfil the requirements in clause 10.1.15.2.2.

A.5.8 Void

A.6 NR standalone tests with all NR cells in FR1

A.6.1 SA: RRC_IDLE state mobility

A.6.1.1 Cell re-selection to NR

A.6.1.1.1 Cell reselection to FR1 intra-frequency NR case

A.6.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements specified in clause 4.2.2.3.

A.6.1.1.1.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.6.1.1.1.2-1, A.6.1.1.1.2-2 and A.6.1.1.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.6.1.1.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.1.1.1.2-2: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	
T2 end condition	Active cell		1, 2, 3	Cell2	
	Neighbour cells		1, 2, 3	Cell1	
Final condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3	1.28	The value shall be used for all cells in the test.

PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1, 2, 3	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2, 3	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.1.1.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-130			-130		
		3	-127			-127		
Pcompensation	dB	1, 2, 3	0			0		
Qhysts	dB	1, 2, 3	0			0		
Qoffset _{s, n}	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	16	-3.11	2.79	-infinity	2.79	-3.11
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					

		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	16	13	16	-infinity	16	13
		2						
		3						
SS-RSRP ^{Note3}	dBm/SCS	1	-82	-85	-82	-infinity	-82	-85
		2	-82	-85	-82	-infinity	-82	-85
		3	-79	-82	-79	-infinity	-79	-82
Io	dBm/9.36 MHz	1	-53.94	-52.21	-52.21	Same as parameters specified in Cell 1 columns-		
	dBm/9.36 MHz	2	-53.94	-52.21	-52.21			
	dBm/38.16 MHz	3	-47.85	-46.12	-46.12			
Treselection	s	1, 2, 3	0	0	0	0	0	0
SintrasearchP	dB	1, 2, 3	60			60		
Propagation Condition		1, 2, 3	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers							
	and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.6.1.1.1.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 34 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{\text{detect, NR_Intra}} + T_{\text{SI-NR}}$, and to an already detected cell can be expressed as: $T_{\text{evaluate, NR_intra}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{detect, NR_Intra}}$ See Table 4.2.2.3-1 in clause 4.2.2.3

$T_{\text{evaluate, NR_intra}}$ See Table 4.2.2.3-1 in clause 4.2.2.3

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 33.28 s, allow 34 s for the cell re-selection delay to a newly detectable cell and 7.68 s for the cell re-selection delay to an already detected cell in the test case, which we allow 8 s.

A.6.1.1.2 Cell reselection to FR1 inter-frequency NR case

A.6.1.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2.2.4.

A.6.1.1.2.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.6.1.1.2.2-1, A.6.1.1.2.2-2 and A.6.1.1.2.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table A.6.1.1.2.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.1.2.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2, 3	Cell 1	
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T3 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2, 3	Cell 1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC.2	Configured in SIB4 of Cell 1
				SMTC.6	Configured in SIB4 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3	Not configured	

T1	s	1, 2, 3	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.1.2.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	14	14	14	-4	-infinity	12
		2						
		3						
N_{oc} ^{Note2}	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} ^{Note2}	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	14	14	14	-4	-infinity	12
		2						
		3						
SS-RSRP ^{Note3}	dBm/SCS	1	-84	-84	-84	-102	-infinity	-86
		2	-84	-84	-84	-102	-infinity	-86

		3	-81	-81	-81	-99	-infinity	-83
Io	dBm/9.36 MHz	1	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
	dBm/9.36 MHz	2	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
	dBm/38.16 MHz	3	-49.79	-49.79	-49.79	-62.50	-63.96	-51.69
Treselection	s	1, 2, 3	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	50			50		
Thresh _{x, highP}	dB	1, 2, 3	48			48		
Thresh _{serving, lowP}	dB	1, 2, 3	44			44		
Thresh _{x, lowP}	dB	1, 2, 3	50			50		
Propagation Condition		1, 2, 3	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers							
Note 3:	and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.6.1.1.2.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$, and to a lower priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$.

Where:

$T_{\text{higher_priority_search}}$ See clause 4.2.2.7

$T_{\text{evaluate, NR_inter}}$ See Table 4.2.2.4-1 in clause 4.2.2.4

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

A.6.1.1.3 Cell reselection to FR1 intra-frequency NR case for UE fulfilling low mobility relaxed measurement criterion

A.6.1.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE fulfilling low mobility criterion specified in clause 4.2.2.9.2

A.6.1.1.3.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.6.1.1.3.2-1, A.6.1.1.3.2-2 and A.6.1.1.3.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.6.1.1.3.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.1.1.3.2-2: General test parameters for FR1 intra frequency NR cell re-selection test case for UE fulfilling low mobility criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2, 3	Cell2	
T1 end condition	Active cell		1, 2, 3	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2, 3	Cell1	
Final condition	Active cell		1, 2, 3	Cell1	The UE reselects to cell 1 during T2 period
	Neighbour cells		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC pattern 2	Configured in SIB2 of Cell 1
				SMTC pattern 6	Configured in SIB2 of Cell 2
			2	SMTC pattern 1	
				SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.64	The value shall be used for all cells in the test.

PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	25	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	25	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.1.3.2-3: Cell specific test parameters for FR1 intra frequency NR cell re-selection test case in AWGN for UE fulfilling low mobility criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3	0		0	
Qhysts	dB	1, 2, 3	0		0	
Qoffsets, n	dB	1, 2, 3	0		0	
SsearchDeltaP	dB	1, 2, 3	3		3	
TsearchDeltaP	s	1, 2, 3	5		5	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
$\hat{E}_s/I_{ot}$	dB	1, 2, 3	-3.11	2.79	2.79	-3.11

N_{oc} ^{Note2}	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note2}	dBm/15 kHz	1, 2, 3	-98			
$\hat{E}_s / N_{oc}$	dB	1, 2, 3	13	16	16	13
SS-RSRP ^{Note3}	dBm/SCS	1	-85	-82	-82	-85
		2	-85	-82	-82	-85
		3	-82	-79	-79	-82
Io	dBm/9.36 MHz	1	-52.21	-52.21	specified in Cell 1 columns-	
	dBm/9.36 MHz	2	-52.21	-52.21		
	dBm/38.16 MHz	3	-46.12	-46.12		
Treselection	s	1, 2, 3	0	0	0	0
SintrasearchP	dB	1, 2, 3	60		60	
Propagation Condition		1, 2, 3	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.1.1.3.3 Test Requirements

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected cell shall be less than 17 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell shall be less than 17 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detected cell can be expressed as: $T_{\text{evaluate,NR_Intra}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{evaluate,NR_Intra}}$ See Table 4.2.2.9.2-1 in clause 4.2.2.9.2 for reselection to Cell 2 during T1 with UE fulfilling low mobility criterion. 15.36s.

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 16.64 s, allow 17 s for the cell re-selection delay to an already detected cell for UE fulfilling low mobility criterion in the test case.

A.6.1.1.4 Cell reselection to FR1 intra-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion

A.6.1.1.4.1 Test Purpose and Environment

This test is to verify the relaxed cell re-selection requirement for UEs configured with not-at-cell edge criterion specified in clause 4.2.2.9.3.

A.6.1.1.4.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.6.1.1.4.2-1, A.6.1.1.4.2-2 and A.6.1.1.4.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas.

Table A.6.1.1.4.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.1.1.4.2-2: General test parameters for FR1 intra frequency NR cell re-selection test case for UE fulfilling not-at-cell edge criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active Cell		1, 2, 3	Cell1	The UE camps on Cell 1 in the initial phase
	Neighbour Cells		1, 2, 3	Cell2	
T1 end condition	Active Cell		1, 2, 3	Cell2	The UE shall fulfil the not-at-cell edge criterion and reselect to cell 2 during T1 period during T1.
	Neighbour Cells		1, 2, 3	Cell1	
T2 end condition	Active Cell		1, 2, 3	Cell1	The UE shall perform reselection to Cell 1 during T2
	Neighbour Cells		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between Cells			1	3 ms	Asynchronous Cells
			2	3 μ s	Synchronous Cells
			3	3 μ s	Synchronous Cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC pattern 2	Configured in SIB2 of Cell 1
				SMTC pattern 6	Configured in SIB2 of Cell 2
			2	SMTC pattern 1	
			3	SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.64	The value shall be used for all Cells in the test.
PRACH configuration index			1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2

rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	20	T1 needs to be defined so that Cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	20	T2 needs to be defined so that Cell re-selection reaction time is taken into account.

Table A.6.1.1.4.2-3: Cell specific test parameters for FR1 intra frequency NR cell re-selection test case in AWGN for UE fulfilling not-at-cell edge criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3	0		0	
Qhysts	dB	1, 2, 3	0		0	
Qoffsets, n	dB	1, 2, 3	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1	-3.11	2.79	2.79	-3.11
		2				
		3				
N_{oc} ^{Note2}	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note2}	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1	13	16	16	13
		2				
		3				

SS-RSRP ^{Note3}	dBm/SCS	1	-85	-82	-82	-85
		2	-85	-82	-82	-85
		3	-82	-79	-79	-82
Io	dBm/9.36 MHz	1	-52.21	-52.21	-52.21	-52.21
	dBm/9.36 MHz	2	-52.21	-52.21	-52.21	-52.21
	dBm/38.16 MHz	3	-46.12	-46.12	-46.12	-46.12
Treselection	s	1, 2, 3	0	0	0	0
SintrasearchP	dB	1, 2, 3	60		60	
SsearchThresholdP	dB	1, 2, 3	50		50	
Propagation Condition		1, 2, 3	AWGN			
Note 1:	OCNG shall be used such that both Cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other Cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.6.1.1.4.3 Test Requirements

The cell re-selection delay to an already detected cell for UE configured with *cellEdgeEvaluation* criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected cell for UE configured with *cellEdgeEvaluation* criterion shall be less than 17s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detected cell for UE configured with relaxed measurement criterion can be expressed as: $T_{\text{evaluate,NR_Intra}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{evaluate,NR_Intra}}$ See Table 4.2.2.9.3-1 for UE fulfilling not-at-cell edge criterion in clause 4.2.2.9.3.

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a Cell; 1280ms is assumed in this test case.

This gives a total of 16.64s, allow 17s for the cell re-selection delay to an already detected cell for UE fulfilling not-at-cell edge criterion in the test case.

A.6.1.1.5 Cell reselection to FR1 inter-frequency NR case for UE fulfilling low mobility relaxed measurement criterion

A.6.1.1.5.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2.2.10.2, for UE fulfilling low mobility relaxed measurement criterion.

A.6.1.1.5.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.6.1.1.5.2-1, A.6.1.1.5.2-2 and A.6.1.1.5.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

As specified in the Test Purpose, the UE is configured with the relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in [1]. So, Cell 2 and Cell 1 configure the UE as follows:

lowMobilityEvaluation [2] criterion is configured according to the parameters listed in Table A.6.1.1.5.2-3;

cellEdgeEvaluation [2] criterion is not configured;

combineRelaxedMeasCondition [2] is not configured;

Table A.6.1.1.5.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.1.5.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case for UE fulfilling low mobility criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 in the initial phase, it fulfills Low Mobility relaxation measurements criterion, and during T1 period the UE reselects to cell 1
	Neighbour cells		1, 2, 3	Cell1	
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T2 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T2
	Neighbour cells		1, 2, 3	Cell1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB Configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC pattern 2	Configured in SIB4 of Cell 1
				SMTC pattern 6	Configured in SIB4 of Cell 2
			2	SMTC pattern 1	
			3	SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3	Not configured	
T1		s	1, 2, 3	25 s	T1 is defined so that cell re-selection reaction time is taken into account.

T2	s	1, 2, 3	25 s	T2 is defined so that cell re-selection reaction time is taken into account.
----	---	---------	------	--

Table A.6.1.1.5.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN for UE fulfilling low mobility criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		SR.1.1 FDD	
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3	0		0	
Qhysts	dB	1, 2, 3	0		0	
Qoffsets, n	dB	1, 2, 3	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1	14	14	-4	12
		2				
		3				
N_{oc} ^{Note2}	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note2}	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1	14	14	-4	12
		2				
		3				
SS-RSRP ^{Note3}	dBm/SCS	1	-84	-84	-102	-86
		2	-84	-84	-102	-86
		3	-81	-81	-99	-83
Io	dBm/9.36 MHz	1	-55.88	-55.88	-68.60	-57.78
	dBm/9.36 MHz	2	-55.88	-55.88	-68.60	-57.78
	dBm/38.16 MHz	3	-49.79	-49.79	-62.50	-51.69

Treselection	s	1, 2, 3	0	0	0	0
SnointrasearchP	dB	1, 2, 3	Not sent		Not sent	
Thresh _{x, highP}	dB	1, 2, 3	48		48	
Thresh _{serving, lowP}	dB	1, 2, 3	44		44	
Thresh _{x, lowP}	dB	1, 2, 3	50		50	
S _{SearchDeltaP}	dB	1, 2, 3	3		3	
T _{SearchDeltaP}	s	1, 2, 3	5		5	
Propagation Condition		1, 2, 3	AWGN			
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers					
	and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.6.1.1.5.3 Test Requirements

The cell reselection delay to an already detected lower priority cell for UE fulfilling low mobility relaxed measurements is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to a lower priority cell for UE fulfilling low mobility relaxed measurements shall be less than 17 s.

The cell reselection delay to an already detected higher priority cell for UE fulfilling low mobility relaxed measurements is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to an already detected higher priority cell for UE fulfilling low mobility relaxed measurements shall be less than 17 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a known lower priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{evaluate, NR_inter}}$ See Table 4.2.2.10.2-1 in clause 4.2.2.10.2

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 16.64 s, allow 17s for the cell re-selection delay to an already detected lower priority cell and 16.64s for the cell re-selection delay to an already detected higher priority cell, which we allow 17s for UE fulfilling low mobility relaxed measurements in the test case.

A.6.1.1.6 Cell reselection to FR1 inter-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion

A.6.1.1.6.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2.2.10.3, for UE fulfilling not-at-cell edge relaxed measurement criterion.

A.6.1.1.6.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.6.1.1.6.2-1, A.6.1.1.6.2-2 and A.6.1.1.6.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

As specified in the Test Purpose, the UE is configured with the relaxed measurement criterion for UE not-at-cell edge as defined in clause 5.2.4.9.2 in [1]. So, Cell 2 and Cell 1 configures the UE as follows:

cellEdgeEvaluation [2] criterion is configured according to the parameters listed in Table A.6.1.1.5.2-3;

lowMobilityEvaluation [2] criterion is not configured;

combineRelaxedMeasCondition [2] is not configured;

Table A.6.1.1.6.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.1.6.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case for UE fulfilling not-at-cell edge criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 in the initial phase, it fulfills Not-at-cell edge relaxation measurements criterion, and during T1 period the UE reselects to cell 1
	Neighbour cells		1, 2, 3	Cell1	
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T2 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T2
	Neighbour cells		1, 2, 3	Cell1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB Configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	

SMTC configuration		1	SMTC pattern 2	Configured in SIB4 of Cell 1
			SMTC pattern 6	Configured in SIB4 of Cell 2
		2	SMTC pattern 1	
		3	SMTC pattern 1	
DRX cycle length	s	1, 2, 3	0.64	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	20 s	T1 is defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	20 s	T2 is defined so that cell re-selection reaction time is taken into account.

Table A.6.1.1.6.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN for UE fulfilling not-at-cell edge criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		SR.1.1 FDD	
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3	0		0	
Qhysts	dB	1, 2, 3	0		0	
Qoffsets,n	dB	1, 2, 3	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
$\hat{E}_s/I_{ot}$	dB	1	14	14	-4	12
		2				
		3				
N_{oc} ^{Note2}	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note2}	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	14	14	-4	12
		2				
		3				
SS-RSRP ^{Note3}	dBm/SCS	1	-84	-84	-102	-86
		2	-84	-84	-102	-86
		3	-81	-81	-99	-83
Io	dBm/9.36 MHz	1	-55.88	-55.88	-68.60	-57.78
	dBm/9.36 MHz	2	-55.88	-55.88	-68.60	-57.78
	dBm/38.16 MHz	3	-49.79	-49.79	-62.50	-51.69
Treselection	s	1, 2, 3	0	0	0	0

SnointrasearchP	dB	1, 2, 3	Not sent	Not sent
Thresh _{x, highP}	dB	1, 2, 3	48	48
Thresh _{serving, lowP}	dB	1, 2, 3	44	44
Thresh _{x, lowP}	dB	1, 2, 3	50	50
S _{SearchThresholdP}	dB	1, 2, 3	50	50
S _{SearchThresholdQ}	s	1, 2, 3	Not Configured	
Propagation Condition		1, 2, 3	AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.6.1.1.6.3 Test Requirements

The cell reselection delay to an already detected lower priority cell for UE fulfilling not-at-cell edge relaxed measurements is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected lower priority cell for UE fulfilling not-at-cell edge relaxed measurements shall be less than 17 s.

The cell reselection delay to an already detected higher priority cell for UE fulfilling not-at-cell-edge relaxed measurements is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to an already detected higher priority cell for UE fulfilling not-at-cell-edge relaxed measurements shall be less than 17 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{evaluate, NR_inter}}$ See Table 4.2.2.10.3-1 in clause 4.2.2.10

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 16.64 s, allow 17s for the cell re-selection delay to an already detected lower priority cell and 16.64s for the cell re-selection delay to an already higher priority cell, which we allow 17s for UE fulfilling not-at-cell edge relaxed measurements in the test case.

A.6.1.1.7 Cell reselection to FR1 intra-frequency NR case for UE configured with *highSpeedMeasFlag-r16*

A.6.1.1.7.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE configured with *highSpeedMeasFlag-r16* specified in clause 4.2.2.3.

A.6.1.1.7.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.6.1.1.7.2-1, A.6.1.1.7.2-2 and A.6.1.1.7.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2. *highSpeedMeasFlag-r16* is broadcasted to UE.

Table A.6.1.1.7.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.1.1.7.2-2: General test parameters for intra frequency NR cell re-selection test case for UE configured with *highSpeedMeasFlag-r16*

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	
T2 end condition	Active cell		1, 2, 3	Cell2	
	Neighbour cells		1, 2, 3	Cell1	
Final condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC pattern 2	Configured in SIB2 of Cell 1
				SMTC pattern 6	Configured in SIB2 of Cell 2
			2	SMTC pattern 1	
			3	SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.32	The value shall be used for all cells in the test.

PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1, 2, 3	10	T2 needs to be defined so that cell re-selection reaction time is taken into account. Note: This value includes 6sec to allow Tracking Area Update procedure to be completed.
T3	s	1, 2, 3	9	T3 needs to be defined so that cell re-selection reaction time is taken into account. Note: This value includes 6sec to allow Tracking Area Update procedure to be completed.

Table A.6.1.1.7.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case for UE configured with *highSpeedMeasFlag-r16*

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3	0			0		
Qhyst _s	dB	1, 2, 3	0			0		
Qoffset _{s, n}	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	16	-3.11	2.79	-infinity	2.79	-3.11

		2						
		3						
N_{oc} ^{Note2}	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} ^{Note2}	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	16	13	16	-infinity	16	13
		2						
		3						
SS-RSRP ^{Note3}	dBm/SCS	1	-82	-85	-82	-infinity	-82	-85
		2	-82	-85	-82	-infinity	-82	-85
		3	-79	-82	-79	-infinity	-79	-82
Io	dBm/9.36 MHz	1	-53.94	-52.21	-52.21	Same as parameters specified in Cell 1 columns-		
	dBm/9.36 MHz	2	-53.94	-52.21	-52.21			
	dBm/38.16 MHz	3	-47.85	-46.12	-46.12			
Treselection	s	1, 2, 3	0	0	0	0	0	0
SintrasearchP	dB	1, 2, 3	60			60		
Propagation Condition		1, 2	AWGN			AWGN 1944Hz ^{Note4}		
Propagation Condition		3	AWGN			AWGN 3334Hz ^{Note5}		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944 Hz. Note 5: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334 Hz.								

A.6.1.1.7.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 4 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell shall be less than 3 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{\text{detect, NR_Intra}} + T_{\text{SI-NR}}$, and to an already detected cell can be expressed as: $T_{\text{evaluate, NR_intra}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{detect, NR_Intra}}$	See Table 4.2.2.3-2 in clause 4.2.2.3
$T_{\text{evaluate, NR_intra}}$	See Table 4.2.2.3-2 in clause 4.2.2.3
$T_{\text{SI-NR}}$	Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 3.84s, allow 4s for the cell re-selection delay to a newly detectable cell and 2.24 s for the cell re-selection delay to an already detected cell in the test case, which we allow 3 s.

A.6.1.1.8 Cell reselection to FR1 inter-frequency NR case for UE configured with *highSpeedMeasInterFreq-r17*

A.6.1.1.8.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for UE configured with *highSpeedMeasInterFreq-r17* specified in clause 4.2.2.4.

A.6.1.1.8.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.6.1.1.8.2-1, A.6.1.1.8.2-2 and A.6.1.1.8.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table A.6.1.1.8.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.1.8.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2, 3	Cell 1	
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T3 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 during T3
	Neighbour cell		1, 2, 3	Cell 1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells

Access Barring Information	-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
DRX cycle length	s	1, 2, 3	0.32	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	10	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3	12	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.1.8.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{\alpha}$	dB	1	14	14	14	-4	-infinity	12
		2						
		3						

N_{oc} ^{Note2}	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} ^{Note2}	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	14	14	14	-4	-infinity	12
		2						
		3						
SSB_RP ^{Note3}	dBm/SCS	1	-84	-84	-84	-102	-infinity	-86
		2	-84	-84	-84	-102	-infinity	-86
		3	-81	-81	-81	-99	-infinity	-83
Io	dBm/9.36 MHz	1	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
	dBm/9.36 MHz	2	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
	dBm/38.16 MHz	3	-49.79	-49.79	-49.79	-62.50	-63.96	-51.69
Treselection	s	1, 2, 3	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	50			50		
Thresh _{x, highP}	dB	1, 2, 3	48			48		
Thresh _{serving, lowP}	dB	1, 2, 3	44			44		
Thresh _{x, lowP}	dB	1, 2, 3	50			50		
Propagation Condition		1, 2	AWGN			AWGN 1944Hz ^{Note4}		
		3	AWGN			AWGN 3334Hz ^{Note5}		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers								
and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 4: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944 Hz.								
Note 5: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334 Hz.								

A.6.1.1.8.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 5 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell shall be less than 3 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{\text{detect,NR_Inter_HST}} + T_{\text{SI-NR}}$, and to an already detected cell can be expressed as: $T_{\text{evaluate,NR_Inter_HST}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{detect,NR_Inter_HST}}$ See Table 4.2.2.4-2 in clause 4.2.2.4

$T_{\text{evaluate,NR_Inter_HST}}$ See Table 4.2.2.4-2 in clause 4.2.2.4

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 4.48s, allow 5s for the cell re-selection delay to a newly detectable cell and 2.24 s for the cell re-selection delay to an already detected cell in the test case, which we allow 3 s.

A.6.1.2 Inter-RAT E-UTRAN cell re-selection

A.6.1.2.1 Cell reselection to higher priority E-UTRAN

A.6.1.2.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2.2.5 when the E-UTRAN cell is of higher priority.

A.6.1.2.1.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.6.1.2.1.2-1, A.6.1.2.1.2-2, A.6.1.2.1.2-3 and A.6.1.2.1.2-4. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. NR cell 1 is already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of higher priority than cell 1.

Table A.6.1.2.1.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.2.1.2-2: General test parameters for NR to E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase and during T2 period the UE reselects to cell 2.
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T2.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell1	
T3 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 during T3 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6	1.28	The value shall be used for all cells in the test.

NR PRACH configuration index		1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index		1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211 [23]
		4, 5, 6	4	
E-UTRAN PRACH configuration index		1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211 [23]
		4, 5, 6	4	
T1	s	1, 2, 3, 4, 5, 6	>7	During T1, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T2.
T2	s	1, 2, 3, 4, 5, 6	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2, 3, 4, 5, 6	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.2.1.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1		
			T1	T2	T3
TDD configuration		1, 4	N/A		
		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH parameters		1, 4	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET parameters		1, 4	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
Dedicated CORESET parameters		1, 4	CCR.1.1 FDD		
		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
SSB parameters		1, 4	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.2 FR1		
NR SMTC parameters		1, 4	SMTC.2		
		2, 5	SMTC.1		
		3, 6	SMTC.1		
OCNG Pattern		1, 2, 3, 4, 5, 6	OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1		
RLM-RS		1, 2, 3, 4, 5, 6	SSB		
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140		
		3, 6	-137		
N_{oc}	dBm/SCS	1, 4	-98		
		2, 5	-98		
		3, 6	-95		
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6	-98		
SS-RSRP	dBm/SCS	1, 4	-84	-84	-84
		2, 5	-84	-84	-84
		3, 6	-81	-81	-81
$\hat{E}_s / I_{ot}$	dB	1, 4	14	14	14

		2, 5			
		3, 6			
$\hat{E}_s / N_{oc}$	dB	1, 4	14	14	14
		2, 5			
		3, 6			
Io	dBm/9.36 MHz	1, 4	-55.88	-55.88	-55.88
	dBm/9.36 MHz	2, 5	-55.88	-55.88	-55.88
	dBm/38.16 MHz	3, 6	-49.79	-49.79	-49.79
Treselection	S	1, 2, 3, 4, 5, 6	0		
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6	50		
Thresh _{x, highP} (Note 2)	dB	1, 2, 3, 4, 5, 6	48		
Thresh _{serving, lowP}	dB	1, 2, 3, 4, 5, 6	44		
Thresh _{x, lowP}	dB	1, 2, 3, 4, 5, 6	50		
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	This refers to the value of Thresh _{x, high} which is included in NR system information, and is a threshold for the E-UTRA target cell				

Table A.6.1.2.1.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2		
		T1	T2	T3
E-UTRA RF Channel number		1		
BW _{channel}	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
OCNG_RB ^{Note 1}	dB			
Q _{rxlevmin}	dBm	-140		
N_{oc}	dBm/15 kHz	-98		
RSRP	dBm/15 KHz	-infinity	-86	-102
$\hat{E}_s / I_{ot}$	dB	-infinity	12	-4
$\hat{E}_s / N_{oc}$	dB	-infinity	12	-4
Treselection _{EUTRAN}	s	0		
SnonintrasearchP	dB	Not sent		
Thresh _{x, highP}	dB	48		
Thresh _{serving, lowP}	dB	44		
Thresh _{x, lowP} (Note 2)	dB	50		
Propagation Condition		AWGN		

- | | |
|---------|---|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | This refers to the value of $\text{Thresh}_{x, \text{Low}}$ which is included in E-UTRA system information, and is a threshold for the NR target cell |

A.6.1.2.1.3 Test Requirements

The cell reselection delay to a higher priority E-UTRAN cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{evaluate, E-UTRAN}} + T_{\text{SI-E-UTRA}}$

Where:

- | | |
|---------------------------------------|---|
| $T_{\text{higher_priority_search}}$ | See clause 4.2.2.7 |
| $T_{\text{evaluate, E-UTRAN}}$ | See Table 4.2.2.5-1 in clause 4.2.2.5 |
| $T_{\text{SI-E-UTRA}}$ | Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case. |

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority E-UTRAN cell.

A.6.1.2.2 Cell reselection to lower priority E-UTRAN

A.6.1.2.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2.2.5 when the E-UTRAN cell is of lower priority.

A.6.1.2.2.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.6.1.2.2.2-1, A.6.1.2.2.2-2, A.6.1.2.2.2-3 and A.6.1.2.2.2-4. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

Table A.6.1.2.2.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode

Note: The UE is only required to be tested in one of the supported test configurations.

Table A.6.1.2.2-2: General test parameters for NR to E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3	534	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6		
T1		s	1, 2, 3, 4, 5, 6	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.2.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SMTC.1	
OCNG Pattern		1, 2, 3, 4, 5, 6	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	

N_{oc}	dBm/SCS	3, 6	-137	
		1, 4	-98	
		2, 5	-98	
		3, 6	-95	
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6	-98	
SS-RSRP	dBm/SCS	1, 4	-102	-86
		2, 5	-102	-86
		3, 6	-99	-83
$\hat{E}_s / I_{ot}$	dB	1, 4	-4	12
		2, 5		
		3, 6		
$\hat{E}_s / N_{oc}$	dB	1, 4	-4	12
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4	-68.60	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-57.78
	dBm/38.16 MHz	3, 6	-62.50	-51.69
Treselection	S	1, 2, 3, 4, 5, 6	0	
SnointrasearchP	dB	1, 2, 3, 4, 5, 6	Not sent	
Thresh _{x, highP}	dB	1, 2, 3, 4, 5, 6	48	
Thresh _{serving, lowP}	dB	1, 2, 3, 4, 5, 6	44	
Thresh _{x, lowP} (Note 2)	dB	1, 2, 3, 4, 5, 6	50	
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: This refers to the value of Thresh _{x, high} which is included in NR system information, and is a threshold for the E-UTRA target cell				

Table A.6.1.2.2.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
BW _{channel}	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note 1}	dB		
OCNG_RB ^{Note 1}	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	

RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s / I_{ot}$	dB	14	14
$\hat{E}_s / N_{oc}$	dB	14	14
TreselectionEUTRAN	s	0	
SnonintrasearchP	dB	Not sent	
Thresh _{x, highP} (Note 2)	dB	48	
Thresh _{serving, lowP}	dB	44	
Thresh _{x, lowP}	dB	50	
Propagation Condition		AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	This refers to the value of Thresh _{x, high} which is included in E-UTRA system information, and is a threshold for the NR target cell		

A.6.1.2.2.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, E-UTRAN} + T_{SI-E-UTRA}$,

Where:

$T_{evaluate, E-UTRAN}$ See Table 4.2.2.5-1 in clause 4.2.2.5

$T_{SI-E-UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8 s for the cell re-selection delay to a lower priority E-UTRAN cell.

A.6.1.2.3 Cell reselection to lower priority E-UTRAN for UE fulfilling low mobility relaxed measurement criterion

A.6.1.2.3.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection when UE fulfills the low mobility criterion specified in clause 4.2.2.11.2 and the E-UTRAN cell is of lower priority.

A.6.1.2.3.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.6.1.2.3.2-1, A.6.1.2.3.2-2, A.6.1.2.3.2-3 and A.6.1.2.3.2-4. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

As specified in the Test Purpose, the UE is configured with the relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in [1]. So, Cell 1 configures the UE as follows:

- *lowMobilityEvaluation* [2] criterion is configured according to the parameters listed in Table A.6.1.2.3.2-3;
- *cellEdgeEvaluation* [2] criterion is not configured;

- *combineRelaxedMeasCondition* [2] is not configured

Table A.6.1.2.3.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.2.3.2-2: General test parameters for NR to E-UTRAN cell re-selection test case for UE fulfilling low mobility criterion

Parameter		Unit	Test configuration	Value	Comment	
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase, it fulfills Low Mobility relaxation measurements criterion, and during T1 period the UE reselects to cell 2	
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell2		
T1 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T1	
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell1		
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 with higher priority during T2 for iteration of the tests.	
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell2		
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.	
DRX cycle length		s	1, 2, 3, 4, 5, 6	0.64	The value shall be used for all cells in the test.	
NR PRACH configuration index			1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2	
E-UTRAN PRACH configuration index			1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211 [23]	
			4, 5, 6	4		
T1		s	1, 2, 3, 4, 5, 6	24	T1 needs to be defined so that cell re-selection reaction time is taken into account.	
T2		s	1, 2, 3, 4, 5, 6	24	T2 needs to be defined so that cell re-selection reaction time is taken into account.	

Table A.6.1.2.3.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	

RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4	SMTC pattern 2	
		2, 5	SMTC pattern 1	
		3, 6	SMTC pattern 1	
OCNG Pattern		1, 2, 3, 4, 5, 6	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4	-98	
		2, 5	-98	
		3, 6	-95	
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6	-98	
SS-RSRP	dBm/SCS	1, 4	-102	-86
		2, 5	-102	-86
		3, 6	-99	-83
$\hat{E}_s/I_{ot}$	dB	1, 4	-4	12
		2, 5		
		3, 6		
$\hat{E}_s/N_{oc}$	dB	1, 4	-4	12
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4	-68.60	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-57.78
	dBm/38.16 MHz	3, 6	-62.50	-51.69
TreselectionP	s	1, 2, 3, 4, 5, 6	0	
Snonintrasearch	dB	1, 2, 3, 4, 5, 6	50	
Thresh _{x, highP}	dB	1, 2, 3, 4, 5, 6	48	
Thresh _{serving, lowP}	dB	1, 2, 3, 4, 5, 6	44	
Thresh _{x, lowP} (Note 2)	dB	1, 2, 3, 4, 5, 6	50	
S _{SearchDeltaP}	dB	1, 2, 3, 4, 5, 6	3	
T _{SearchDeltaP}	s	1, 2, 3, 4, 5, 6	5	
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	This refers to the value of Thresh _{x, low} which is included in NR system information, and is a threshold for the E-UTRA target cell			

Table A.6.1.2.3.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
BW _{channel}	MHz	10	

OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note 1}	dB		
OCNG_RB ^{Note 1}	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s/I_{ot}$	dB	14	14
$\hat{E}_s/N_{oc}$	dB	14	14
Treselection _{EUTRAN}	S	0	
Snonintrasearch	dB	Not sent	
Thresh _{x, high} (Note 2)	dB	48	
Thresh _{serving, low}	dB	44	
Thresh _{x, low}	dB	50	
Propagation Condition		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: This refers to the value of Thresh _{x, high} which is included in E-UTRA system information, and is a threshold for the NR target cell			

A.6.1.2.3.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell with UE fulfilling low mobility criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCConnectionRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 17 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{\text{evaluate, E-UTRAN}} + T_{\text{SI-E-UTRA}}$,

Where:

$T_{\text{evaluate, E-UTRAN}}$ See Table 4.2.2.11.2-1 in clause 4.2.2.11.2

$T_{\text{SI-E-UTRA}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of $15.36 (T_{\text{evaluate, E-UTRAN}}) + 1.28 (T_{\text{SI-E-UTRA}}) = 16.64$ s, allow 17 s for the cell re-selection delay to a lower priority E-UTRAN cell for UE fulfilling low mobility criterion.

A.6.1.2.4 Cell reselection to lower priority E-UTRAN for UE fulfilling not-at-cell edge relaxed measurement criterion

A.6.1.2.4.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements when UE fulfills not-at-cell edge criterion specified in clause 4.2.2.11.3 when the E-UTRAN cell is of lower priority.

A.6.1.2.4.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.6.1.2.4.2-1, A.6.1.2.4.2-2, A.6.1.2.4.2-3 and A.6.1.2.4.2-4. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

As specified in the Test Purpose, the UE is configured with the relaxed measurement criterion for UE with not-at-cell edge defined in clause 5.2.4.9.2 in [1]. So, Cell 1 configures the UE as follows:

- *lowMobilityEvaluation* [2] criterion is not configured;
- *cellEdgeEvaluation* [2] criterion is configured according to the parameters listed in Table A.6.1.2.4.2-3;
- *combineRelaxedMeasCondition* [2] is not configured

Table A.6.1.2.4.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.2.4.2-2: General test parameters for NR to E-UTRAN cell re-selection test case for UE fulfilling not-at-cell edge criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase and fulfill the not at the cell edge criteria.
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6	0.64	The value shall be used for all cells in the test.

NR PRACH configuration index		1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index		1, 2, 3 4, 5, 6	53 4	As specified in table 5.7.1-2 in TS 36.211 [23]
T1	s	1, 2, 3, 4, 5, 6	24	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4, 5, 6	24	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.2.4.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4	SMTC pattern 2	
		2, 5	SMTC pattern 1	
		3, 6	SMTC pattern 1	
OCNG Pattern		1, 2, 3, 4, 5, 6	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4	-98	
		2, 5	-98	
		3, 6	-95	
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6	-98	
SS-RSRP	dBm/SCS	1, 4	-102	-86
		2, 5	-102	-86
		3, 6	-99	-83
$\hat{E}_s / I_{ot}$	dB	1, 4	-4	12
		2, 5		
		3, 6		
$\hat{E}_s / N_{oc}$	dB	1, 4	-4	12
		2, 5		
		3, 6		
S _{SearchThresholdP}	dB	1, 2, 3, 4, 5, 6	32	32
I _o	dBm/9.36 MHz	1, 4	-68.60	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-57.78
	dBm/38.16 MHz	3, 6	-62.50	-51.69

Treselection	S	1, 2, 3, 4, 5, 6	0
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6	60
Thresh _{x, highP}	dB	1, 2, 3, 4, 5, 6	48
Thresh _{serving, lowP}	dB	1, 2, 3, 4, 5, 6	44
Thresh _{x, lowP} (Note 2)	dB	1, 2, 3, 4, 5, 6	50
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: This refers to the value of Thresh _{x, low} which is included in NR system information, and is a threshold for the E-UTRA target cell			

Table A.6.1.2.4.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
BW _{channel}	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note 1}	dB		
OCNG_RB ^{Note 1}	dB		
Qrxlevmin	dBm	-140	
N _{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s/I_{ot}$	dB	14	14
$\hat{E}_s/N_{oc}$	dB	14	14
Treselection _{EUTRAN}	S	0	
Snonintrasearch	dB	Not sent	
Thresh _{x, high} (Note 2)	dB	48	
Thresh _{serving, low}	dB	44	
Thresh _{x, low}	dB	50	
Propagation Condition		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: This refers to the value of Thresh _{x, high} which is included in E-UTRA system information, and is a threshold for the NR target cell			

A.6.1.2.4.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRConnectionRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 17s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{\text{evaluate, E-UTRAN}} + T_{\text{SI-E-UTRA}}$,

Where:

$T_{\text{evaluate, E-UTRAN}}$ See Table 4.2.2.11.3-1 in clause 4.2.2.11.3

$T_{\text{SI-E-UTRA}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 16.64 s, allow 17 s for the cell re-selection delay to a lower priority E-UTRAN cell for UE fulfilling not-at-cell edge criterion.

A.6.1.2.5 Cell reselection to lower priority E-UTRAN cell for UE configured with *highSpeedMeasFlag-r16*

A.6.1.2.5.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements for UE configured with *highSpeedMeasFlag-r16* specified in clause 4.2.2.5 when the E-UTRAN cell is of lower priority.

A.6.1.2.5.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.6.1.2.5.2-1, A.6.1.2.5.2-2, A.6.1.2.5.2-3 and A.6.1.2.5.2-4. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1. The E-UTRAN cell 2 is indicated by NR cell 1 as an HST cell.

Table A.6.1.2.5.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.1.2.5.2-2: General test parameters for NR to E-UTRAN cell re-selection test case

Parameter	Unit	Test configuration	Value	Comment
-----------	------	--------------------	-------	---------

Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase.
T1 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6	0.32	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6	4	
T1		s	1, 2, 3, 4, 5, 6	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.6.1.2.5.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4	SMTC pattern 2	
		2, 5	SMTC pattern 1	
		3, 6	SMTC pattern 1	
OCNG Pattern		1, 2, 3, 4, 5, 6	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4	-98	
		2, 5	-98	
		3, 6	-95	
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6	-98	

SS-RSRP	dBm/SCS	1, 4	-102	-86
		2, 5	-102	-86
		3, 6	-99	-83
$\hat{E}_s/I_{ot}$	dB	1, 4	-4	12
		2, 5		
		3, 6		
$\hat{E}_s/N_{oc}$	dB	1, 4	-4	12
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4	-68.60	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-57.78
	dBm/38.16 MHz	3, 6	-62.50	-51.69
Treselection	S	1, 2, 3, 4, 5, 6	0	
SnonintraSearchP	dB	1, 2, 3, 4, 5, 6	50	
Thresh _{x, highP} (Note 2)	dB	1, 2, 3, 4, 5, 6	48	
Thresh _{serving, lowP}	dB	1, 2, 3, 4, 5, 6	44	
Thresh _{x, lowP}	dB	1, 2, 3, 4, 5, 6	50	
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: This refers to the value of Thresh _{x, highP} which is included in NR system information, and is a threshold for the E-UTRA target cell.				
Note 3: Void.				

Table A.6.1.2.5.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
BW _{channel}	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note 1}	dB		
OCNG_RB ^{Note 1}	dB		
Q _{rxlevmin}	dBm	-140	
N _{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s/I_{ot}$	dB	14	14
$\hat{E}_s/N_{oc}$	dB	14	14
Treselection _{EUTRAN}	S	0	

$S_{nonintrasearchP}$	dB	Not sent
$Thresh_{x, highP}$ (Note 2)	dB	48
$Thresh_{serving, lowP}$	dB	44
$Thresh_{x, lowP}$	dB	50
Propagation Condition		AWGN 1944Hz ^{Note3}
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: This refers to the value of $Thresh_{x, highP}$ which is included in E-UTRA system information, and is a threshold for the NR target cell Note 3: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944 Hz.		

A.6.1.2.5.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 3 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, E-UTRAN_HST} + T_{SI-E-UTRA}$,

Where:

$T_{evaluate, E-UTRAN_HST}$ See Table 4.2.2.5-2 in clause 4.2.2.5

$T_{SI-E-UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 2.24 s, allow 3 s for the cell re-selection delay to a lower priority E-UTRAN cell.

A.6.1.1.7 Void

A.6.2 SA: RRC_INACTIVE state mobility

A.6.2.1 Configured Grant based Small Data Transmissions (CG-SDT)

A.6.2.1.1 Test purpose and Environment

The purpose of this test is to partly verify that the UE properly perform TA validation for CG-SDT transmission in clause 5.5.3. The test includes two sub-tests, Sub-test#1 for testing valid TA where UE can initiate CG-SDT transmission, and Sub-test#2 for testing invalid TA where UE does not initiate CG-SDT transmission. Subtest#2 is only tested if Sub-test#1 is passed. For each sub-test, UE is configured with CG-SDT configurations when entering RRC Inactive state. Sub-test#1 consists of four successive time periods, with time duration of T1, T2, T3 and T4 respectively. Sub-test#2 consists of two successive time periods, with time duration of T5 and T6 respectively. There is one cell, which is the active NR cell in FR1. Figure A.6.2.1.1-1 shows the variation of the RSRP over the duration of Sub-test#1, and Figure A.6.2.1.1-2 shows the variation of the RSRP over the duration of Sub-test#2.

In Sub-test#1:

Prior to the time point TA, the UE shall be fully synchronized to PCell (Cell 1), be registered to the cell and have entered RRC connected mode.

Before starting the test at time point TA, test equipment configures RSRP to P0.

At time point TB, RSRP is changed from P0 to P1.

At time point TC, which is W1 after time point TB, UE expect to receive RRC release with CG SDT configuration and RRC status is changed to INACTIVE status.

At time point TD, RSRP is changed from P1 to P0.

At time point TE, RSRP is changed from P0 to P2. TE must be W2 before TF.

Test equipment triggers UL data arrival at UE lower layer at time point TF. After time point TF, test equipment observes whether UE transmits with CG-SDT no later than TG which is W3 after TF.

After time point TG, RRC status is changed from RRC INACTIVE to RRC CONNECTED.

In Sub-test#2:

Prior to the time point TA, the UE shall pass Sub-test#1 and have entered RRC connected mode. Otherwise, Sub-test#2 shall not be executed.

From time point TA to time point TD, RSRP is set to P2.

At time point TC, which is W1 after time point TB, UE expect to receive RRC release with CG SDT configuration and RRC status is changed to INACTIVE status.

At time point TD, RSRP is changed from P2 to P0.

Test equipment triggers UL data arrival at UE lower layer at time point TF. TF is 3360ms after TD. After time point TF, test equipment observes whether UE transmits with CG-SDT no later than TG which is W3 after TF.

W1 equals to 640ms and W2 equals to 640ms based on requirements in clause 5.5.3. W3 is 860ms.

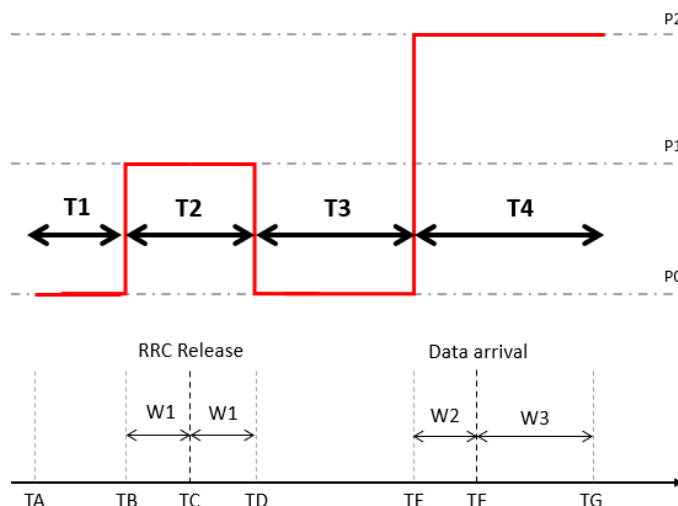


Figure A.6.2.1.1-1: RSRP variation model for CG-SDT Sub-test#1

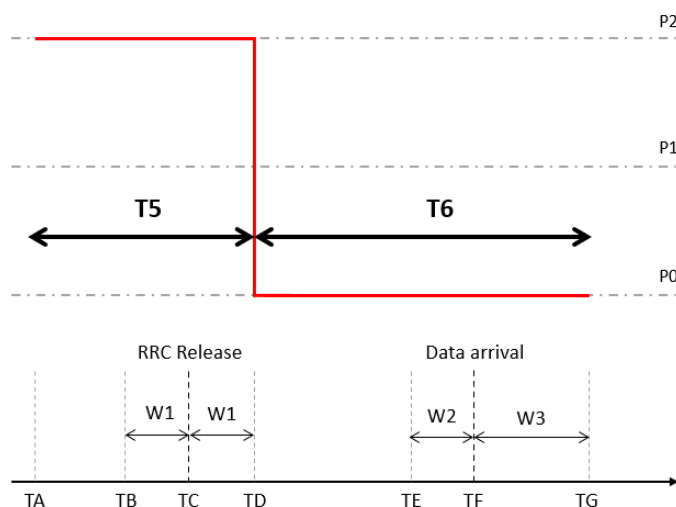


Figure A.6.2.1.1-2: RSRP variation model for CG-SDT Sub-test#2

A.6.2.1.2 Test Parameters

There is one cell in the test, the FR1 PCell. The test parameters for the PCell are given in Table A.6.2.1.2-1, Table A.6.2.1.2-2, and Table A.6.2.1.2-3.

Table A.6.2.1.2-1: NR configuration for FR1 SSB

Config	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.2.1.2-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
TDD Configuration		1	N/A	
		2	TDDConf.1.1	
		3	TDDConf.2.1	
BWchannel	MHz	1,2	10: NRB,c = 52	
		3	40: NRB,c = 106	
PDSCH Reference measurement channel		1	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET Reference Channel		1	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET Reference Channel		1	CCR.1.1 FDD	
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
SSB configuration		1,2	SSB.1 FR1	

		3	SSB.2 FR1	
OCNG Patterns		1,2,3	OP.1	
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration		1,2,3	DLBWP.1.1 ULBWP.1.1	
SMTC configuration		1,2,3	SMTC.1	
DRX configuration	ms	1,2,3	640	
T1	s	1,2,3	0.4	
T2	s	1,2,3	1.28	
T3	s	1,2,3	2.72	
T4	s	1,2,3	1.5	
T5	s	1,2,3	1.68	
T6	s	1,2,3	4.22	
cg-SDT-RSRP-ChangeThreshold	dB	1,2,3	14	
cg-SDT-RSRP-ThresholdSSB	dBm	1,2,3	-110dB	
cg-SDT-TimeAlignmentTime		1,2,3	infinity	
CG-SDT resource period	ms		320	configuredGrantCo nfig Periodicity at 38.331 Config 1,2 : sym320x14, config 3 : sym640x14
Propagation condition		1,2,3	AWGN	

Table A.6.2.1.2-3: SSB specific test parameters

Parameter	Config	Unit	SSB#0					
			T1	T2	T3	T4	T5	T6
N_{oc}	1,2,3	dBm/15kHz	-100					
N_{oc}	1,2	dBm/SSB SCS	-100					
	3	dBm/SSB SCS	-97					
$\hat{E}_s/I_{ot}$	1,2,3	dB	0	12	0	14	14	0
SS RSRP	1,2	dBm/SSB SCS	-100	-88	-100	-86	-86	-100
	3	dBm/SSB SCS	-97	-85	-97	-83	-83	-97
Io	1,2	dBm/9.36MHz	-69.04	-59.78	-69.04	-57.88	-57.88	-69.04
	3	dBm/38.16MHz	-62.93	-53.68	-62.93	-51.78	-51.78	-62.93
$\hat{E}_s/N_{oc}$	1,2,3	dB	0	12	0	14	14	0

A.6.2.1.3 Test requirements

The UE behaviour in each test during time durations shall be as follows:

During Sub-test#1, UE shall transmit PUSCH at CG-SDT resource within 860ms after time point TF.

During Sub-test#2, after passing Sub-test#1, UE shall not transmit PUSCH at CG-SDT resources after TF until the end of the test at time point TG.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.3 RRC_CONNECTED state mobility

A.6.3.1 Handover

A.6.3.1.1 Intra-frequency handover from FR1 to FR1; known target cell

A.6.3.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements specified in clause 6.1.1.2.

A.6.3.1.1.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.1.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.1.2-2, and A.6.3.1.1.2-3.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

NR shall send a RRC message implying handover to cell 2. The RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.6.3.1.1.2-1: Intra-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.1.2-2: General test parameters Intra-frequency handover from FR1 to FR1

Parameter	Unit	Value	Comment
Initial conditions			
Active cell		Cell 1	
Neighbouring cell		Cell 2	
Final condition		Cell 2	
A3-Offset	dB	0	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 5	
T3	s	1	

Table A.6.3.1.1.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
NR RF Channel Number		1			1		

Duplex mode		Config 1		FDD					
		Config 2,3		TDD					
TDD configuration		Config 1		Not Applicable					
		Config 2		TDDConf.1.1					
		Config 3		TDDConf.2.1					
BW _{channel}		Config 1	MHz	10: N _{RB,c} = 52					
		Config 2		10: N _{RB,c} = 52					
		Config 3		40: N _{RB,c} = 106					
BWP BW		Config 1	MHz	10: N _{RB,c} = 52					
		Config 2		10: N _{RB,c} = 52					
		Config 3		40: N _{RB,c} = 106					
DRx Cycle			ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD						
	Config 2		SR.1.1 TDD						
	Config 3		SR2.1 TDD						
CORESET Reference Channel	Config 1		CR.1.1 FDD						
	Config 2		CR.1.1 TDD						
	Config 3		CR2.1 TDD						
TRS configuration	Config 1		TRS.1.1 FDD						
	Config 2		TRS.1.1 TDD						
	Config 3		TRS.1.2 TDD						
OCNG Patterns				OP.1					
SMTc Configuration				SMTc.1					
SSB Configuration	Config 1,2		SSB.1 FR1						
	Config 3		SSB.2 FR1						
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz						
	Config 3		30 kHz						
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz						
	Config 3		30 kHz						
PRACH configuration				FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP		DLBWP.0.1						
	Dedicated DL BWP		DLBWP.1.1						
	Initial UL BWP		ULBWP.0.1						
	Dedicated UL BWP		ULBWP.1.1						
EPRE ratio of PSS to SSS			dB	0					
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N _{oc} ^{Note2}		dBm/15kHz _z	-98						
N _{oc} ^{Note2}	Config 1,2	dBm/SCS	-98						
	Config 3		-95						
Ê _s /I _{ot}			dB	8	-3.3	-3.3	- Infinity	2.36	2.36
Ê _s /N _{oc}			dB	8	8	8	- Infinity	11	11
SSB_RP	Config 1,2		dBm/SCS	-90	-90	-90	- Infinity	-87	-87

	Config 3	dBm/SCS	-87	-87	-87	- Infinity	-84	-84
Io ^{Note3}	Config 1,2	dBm/ 9.36MHz	-61.41	-57.06	-57.06	-61.41	-57.06	-57.06
	Config 3	dBm/ 38.16MHz	-55.31	-50.96	-50.96	-55.31	-50.96	-50.96
Propagation condition		-	AWGN			AWGN		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.6.3.1.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + T_{interrupt}, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

T_{interrupt} = 62 ms in the test. T_{interrupt} is defined in clause 6.1.1.2.2.

This gives a total of 72 ms.

A.6.3.1.2 Intra-frequency handover from FR1 to FR1; unknown target cell

A.6.3.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements specified in clause 6.1.1.2.

A.6.3.1.2.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.2.2-2, and A.6.3.1.2.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.6.3.1.2.2-1: Intra-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.2.2-2: General test parameters Intra-frequency handover from FR1 to FR1

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 5	

Table A.6.3.1.2.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf. 2.1			
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
BWP BW	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			

EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc}^{Note2}		dBm/15kHz z	-98						
N_{oc}^{Note2}	Config 1,2	dBm/SCS	-98						
	Config 3		-95						
$\hat{E}_s/I_{ot}$		dB	8	-0.64	-Infinity	-0.64			
$\hat{E}_s/N_{oc}$		dB	8	8	-Infinity	8			
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-Infinity	-90			
	Config 3	dBm/SCS	-87	-87	-Infinity	-87			
I_o^{Note3}	Config 1,2	dBm/ 9.36MHz	-61.41	-58.71	-61.41	-58.71			
	Config 3	dBm/ 38.16MHz	-55.31	-52.60	-55.31	-52.60			
Propagation condition		-	AWGN		AWGN				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.									
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.									
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.									

A.6.3.1.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 92 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 82 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.2.2.

This gives a total of 92 ms.

A.6.3.1.3 Inter-frequency handover from FR1 to FR1; unknown target cell

A.6.3.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 inter frequency handover requirements specified in clause 6.1.1.2.

A.6.3.1.3.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.3.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.3.2-2, and A.6.3.1.3.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and

the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.6.3.1.3.2-1: Inter-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.3.2-2: General test parameters Inter-frequency handover from FR1 to FR1

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
T1	s	5	
T2	s	≤5	

Table A.6.3.1.3.2-3: Cell specific test parameters for NR FR1-FR1 Inter frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
BWP BW	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			

PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz			
		Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing		Config 1,2	kHz	15 kHz			
		Config 3		30 kHz			
PRACH configuration				FR1 PRACH configuration 1			
BWP		Initial DL BWP		DLBWP.0.1			
		Dedicated DL BWP		DLBWP.1.1			
		Initial UL BWP		ULBWP.0.1			
		Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS			dB	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}			dBm/15kHz	-98		-98	
N_{oc}^{Note2}	Config 1,2		dBm/SCS	-98		-98	
	Config 3			-95		-95	
$\hat{E}_s/I_{ot}$			dB	4	4	-Infinity	5
$\hat{E}_s/N_{oc}$			dB	4	4	-Infinity	5
SSB_RP	Config 1,2		dBm/SCS	-94	-94	-Infinity	-93
	Config 3		dBm/SCS	-91	-91	-Infinity	-90
I_o^{Note3}	Config 1,2		dBm/9.36MHz	-64.59	-64.59	-70.05	-63.85
	Config 3		dBm/38.16MHz	-58.49	-58.49	-63.94	-57.75
Propagation condition			-	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.6.3.1.3.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 132 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 122 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.2.2.

This gives a total of 132 ms.

A.6.3.1.4 SA NR - E-UTRAN handover

A.6.3.1.4.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to E-UTRAN handover requirements as specified in clause 6.1.2.1.

The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the next instant after the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.6.3.1.4-1. General test parameters are provided in Table A.6.3.1.4-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.6.3.1.4-3 and A.6.3.1.4-4 respectively.

Table A.6.3.1.4-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.4-2: General test parameters for SA inter-RAT E-UTRAN handover

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell	Cell 1	NR cell
	Neighbouring cell	Cell 2	E-UTRAN cell
Final condition	Active cell	Cell 2	
NR measurement quantity		SS-RSRP	
E-UTRAN measurement quantity		RSRP	
b2-Threshold1	dBm	As specified in Table A.6.3.1.4-3	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2EUTRAN	dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure
Time offset between cells		3 ms	Asynchronous cells
Gap pattern configuration Id		0	As specified in Table 9.1.2-1 started before T2 starts

T1	s	5	
T2	s	≤5	
T3	s	1	

Table A.6.3.1.4-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6	1		
Duplex mode			1, 4	FDD		
			2, 3, 5, 6	TDD		
TDD Configuration			2, 5	TDDConf.1.1		
			3, 6	TDDConf.2.1		
BW _{channel}		MHz	1, 4	10: N _{RB,c} = 52 (FDD)		
			2, 5	10: N _{RB,c} = 52 (TDD)		
			3, 6	40: N _{RB,c} = 106 (TDD)		
PDSCH reference measurement channel			1, 4	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
TRS configuration			1, 4	TRS.1.1 FDD		
			2, 5	TRS.1.1 TDD		
			3, 6	TRS.1.2 TDD		
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6	OP.1		
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration			1, 2, 4, 5	SSB.1 FR1		
			3, 6	SSB.2 FR1		
b2-Threshold1		dBm	1, 2, 4, 5	-96		
			3, 6	-93		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N _{oc} ^{Note2}						
N _{oc} ^{Note2}		dBm/SCS	1, 2, 4, 5	-100	-104	-100
				3, 6	-97	-101
Ē _s /N _{oc}		dB	1, 2, 3, 4, 5, 6	12	0	0
Ē _s /I _{ot} ^{Note3}		dB	1, 2, 3, 4, 5, 6	12	0	0
SS-RSRP ^{Note3}		dBm/SCS	1, 2, 4, 5	-88	-104	-104

		3, 6	-85	-101	-101
Io ^{Note3}	dBm/9.36 MHz	1, 2, 4, 5	-59.78	-73.04	-69.04
	dBm/38.16 MHz	3, 6	-53.68	-66.9448	-64.19
Propagation condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Table A.6.3.1.4-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	2		
Duplex mode		1, 2, 3	FDD		
		4, 5, 6	TDD		
TDD special subframe configuration ^{Note1}		4, 5, 6	6		
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1		
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,C} = 25$ 10 MHz: $N_{RB,C} = 50$ 20 MHz: $N_{RB,C} = 100$		
PRACH Configuration ^{Note2}		1, 2, 3	4		
		4, 5, 6	53		
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns ^{Note3}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					

PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note4}					
OCNG_RB ^{Note4}					
N _{oc} ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	8	78
$\hat{E}_s/I_{ot}$ ^{Note6}	dB	1, 2, 3, 4, 5, 6	-Infinity	78	78
RSRP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-90	-90
SCH_RP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-90	-90
I _o ^{Note6}	dBm/9MHz	1, 2, 3, 4, 5, 6	-67.21 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix ^{Note7}		1, 2, 3, 4, 5, 6	1x2 Low		
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2:	PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].				
Note 3:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 4:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 5:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 6:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 7:	Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

A.6.3.1.4.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 85 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + T_{interrupt}, where:

RRC procedure delay = 50 ms and is specified in clause 6.1.2.1.

T_{interrupt} = 35 ms in the test; T_{interrupt} is defined in clause 6.1.2.1.

This gives a total of 85 ms.

A.6.3.1.5 SA NR - E-UTRAN handover with unknown target cell

A.6.3.1.5.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to E-UTRAN handover requirements for the case when the target E-UTRAN cell is unknown as specified in clause 6.1.2.1.

The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable. No Gap pattern shall be configured.

A RRC message implying handover shall be sent to the UE during period T1. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.6.3.1.5-1. General test parameters are provided in Table A.6.3.1.5-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.6.3.1.5-3 and A.6.3.1.5-4 respectively.

Table A.6.3.1.5-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.5-2: General test parameters for SA inter-RAT E-UTRAN handover

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell	Cell 1	NR cell
	Neighbouring cell	Cell 2	E-UTRAN cell
Final condition	Active cell	Cell 2	
NR measurement quantity		SS-RSRP	
DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure
Time offset between cells		3 ms	Asynchronous cells
T1	s	≤5	
T2	s	1	

Table A.6.3.1.5-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD Configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
BW _{channel}	MHz	1, 4	10: N _{RB,c} = 52 (FDD)	
		2, 5	10: N _{RB,c} = 52 (TDD)	
		3, 6	40: N _{RB,c} = 106 (TDD)	
PDSCH reference measurement channel		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
CORSET reference channel		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
TRS configuration		1, 4	TRS.1.1 FDD	
		2, 5	TRS.1.1 TDD	
		3, 6	TRS.1.2 TDD	
OCNG pattern ^{Note1}		1, 2, 3, 4, 5, 6	OP.1	
BWP	Initial DL BWP	1, 2, 3, 4, 5, 6	DLBWP.0.1	

	Dedicated DL BWP			DLBWP.1.1	
	Initial UL BWP			ULBWP.0.1	
	Dedicated UL BWP			ULBWP.1.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} ^{Note2}		dBm/15 KHz	1, 2, 3, 4, 5, 6	-98	
N_{oc} ^{Note2}		dBm/SCS	1, 2, 4, 5	-98	
			3, 6	-95	
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	0	0
$\hat{E}_s/I_{ot}$ ^{Note3}		dB	1, 2, 3, 4, 5, 6	0	0
SS-RSRP ^{Note3}		dBm/SCS	1, 2, 4, 5	-98	-98
			3, 6	-95	-95
I_o ^{Note3}		dBm/9.36 MHz	1, 2, 4, 5	-67.04	-67.04
		dBm/38.16 MHz	3, 6	-60.94	-60.94
Propagation condition			1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6	1x2 Low	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not setttable parameters themselves.					

Table A.6.3.1.5-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	2	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c} = 25$	

			10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PRACH Configuration ^{Note2}		1, 2, 3	4	
		4, 5, 6	53	
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note3}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note4}				
OCNG_RB ^{Note4}				
N _{oc} ^{Note5}				
Ê _s /N _{oc}	dB	1, 2, 3, 4, 5, 6	-Infinity	7
Ê _s /I _{ot} ^{Note6}	dB	1, 2, 3, 4, 5, 6	-Infinity	7
RSRP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-91
SCH_RP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-91
I _O ^{Note6}	dBm/9MHz	1, 2, 3, 4, 5, 6	-70.22	-62.43
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix ^{Note7}		1, 2, 3, 4, 5, 6	1x2 Low	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].				
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 6: Ê _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

A.6.3.1.5.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 165 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{\text{interrupt}}$, where:

RRC procedure delay = 50 ms and is specified in clause 6.1.2.1.

$T_{\text{interrupt}}$ = 115 ms in the test; $T_{\text{interrupt}}$ is defined in clause 6.1.2.1.

This gives a total of 165 ms.

A.6.3.1.6 SA NR - UTRAN FDD handover

A.6.3.1.6.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT UTRAN FDD handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to UTRAN FDD handover requirements as specified in clause 6.1.2.2.1.

The test comprises of one NR carrier and one UTRA FDD carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT UTRAN FDD neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.6.3.1.6-1. General test parameters are provided in Table A.6.3.1.6-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.6.3.1.6-3 and A.6.3.1.6-4 respectively.

Table A.6.3.1.6-1: Supported test configurations for SA inter-RAT UTRAN FDD handover tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, UTRAN FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, UTRAN FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, UTRAN FDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.6-2: General test parameters for SA inter-RAT UTRAN FDD handover

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
UTRA RF Channel Number		2	1 UTRAN carrier frequency is used in the test
Initial conditions	Active cell	Cell 1	NR cell
	Neighbouring cell	Cell 2	UTRAN cell
Final condition	Active cell	Cell 2	
NR measurement quantity		SS-RSRP	
Inter-RAT (UTRAN FDD) measurement quantity		CPICH Ec/No	
b2-Threshold1	dBm	As specified in Table A.6.3.1.6-3	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2UTRA-FDD	dB	-18	Absolute UTRAN CPICH Ec/No threshold for event B2
Hysteresis	dB	0	

TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure
Time offset between cells		3 ms	Asynchronous cells
Gap pattern configuration Id		0	As specified in Table 9.1.2-1 started before T2 starts
T1	s	5	
T2	s	≤5	
T3	s	1	

Table A.6.3.1.6-3: Cell specific test parameters for SA inter-RAT UTRAN FDD handover (Cell 1)

Parameter		Unit	Configuration	Cell 1		
			T1	T2	T3	
RF channel number			1, 2, 3	1		
Duplex mode			1	FDD		
			2, 3	TDD		
TDD Configuration			2	TDDConf.1.1		
			3	TDDConf.2.1		
BW _{channel}		MHz	1	10: N _{RB,c} = 52 (FDD)		
			2	10: N _{RB,c} = 52 (TDD)		
			3	40: N _{RB,c} = 106 (TDD)		
PDSCH reference measurement channel			1	SR.1.1 FDD		
			2	SR.1.1 TDD		
			3	SR.2.1 TDD		
CORSET reference channel			1	CR.1.1 FDD		
			2	CR.1.1 TDD		
			3	CR.2.1 TDD		
TRS configuration			1	TRS.1.1 FDD		
			2	TRS.1.1 TDD		
			3	TRS.1.2 TDD		
OCNG pattern ^{Note1}			1, 2, 3	OP.1		
BWP	Initial DL BWP		1, 2, 3	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3	SMTC.1		
SSB configuration			1, 2	SSB.1 FR1		
			3	SSB.2 FR1		
b2-Threshold1		dBm	1, 2	-96		
			3	-93		
EPRE ratio of PSS to SSS		dB	1, 2, 3	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						

EPRE ratio of OCNG to OCNG DMRS					
N_{oc}^{Note2}	dBm/15 KHz	1, 2, 3		-100	
N_{oc}^{Note2}	dBm/SCS	1, 2,		-100	
		3		-97	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3	12	-4	-4
$\hat{E}_s/I_{ot}^{Note3}$	dB	1, 2, 3	12	-4	-4
$SS-RSRP^{Note3}$	dBm/SCS	1, 2	-88	-104	-104
		3	-85	-101	-101
I_o^{Note3}	dBm/9.36 MHz	1, 2	-59.78	-70.59	-70.59
	dBm/38.16 MHz	3	-53.68	-64.49	-64.49
Propagation condition		1, 2, 3		AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3		1x2 Low	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Table A.6.3.1.6-4: Cell specific test parameters for SA inter-RAT UTRAN FDD handover (Cell 2)

Parameter	Unit	Cell 2 (UTRA)		
		T1	T2	T3
UTRA RF Channel Number		2		
CPICH Ec/lor	dB	-10		
PCCPCH Ec/lor	dB	-12		
SCH Ec/lor	dB	-12		
PICH Ec/lor	dB	-15		
DCH Ec/lor	dB	N/A	N/A	Note 1
OCNS Ec/lor	dB	-0.941	0.941	Note 2
$\hat{I}_{or}/I_{oc}$	dB	-infinity	-1.8	-1.8
I_{oc}	dBm/3,84 MHz	-70	-70	-70
CPICH Ec/Io	dB	-infinity	-14	-14
Propagation Condition		AWGN		
Note 1:	The DPCH level is controlled by the power control loop			
Note 2:	The power of the OCNS channel that is added shall make the total power from the cell to be equal to I_{or} .			

A.6.3.1.6.2 Test Requirements

The UE shall start to transmit the UL DPCH to Cell 2 less than 190 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms, which is specified in clause 5.3.1.1.1.

$T_{interrupt}$ = 140 ms in the test; $T_{interrupt}$ is defined in clause 5.3.1.1.2. This gives a total of 190 ms.

A.6.3.1.7 Intra-frequency synchronous DAPS handover in FR1

A.6.3.1.7.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency DAPS handover requirements in synchronous scenario specified in clause 6.1.3.2.

A.6.3.1.7.2 Test Parameters

Supported test configurations are shown in Table A.6.3.1.7.2-1. Both handover delay and interruption length are tested by using the parameters in Table A.6.3.1.7.2-2, and A.6.3.1.7.2-3. The test consists of five successive time periods, with time durations of T1, T2, T3, T4, and T5 respectively.

Before the start of T1, the UE is connected to the cell1 and not aware of the cell2. The UE shall be configured with periodic CSI reporting for cell1. During T1, the UE does not have any timing information of the cell2.

Starting T2, the cell2 becomes detectable. During T2, the UE performs cell detection and measurements on the cell2 and shall send event report to the network. After receiving the event report A3, the network sends a RRC message implying DAPS handover to the UE.

The start of T3 is the instant when the last TTI containing DAPS handover command is sent to the UE. During T3, UE shall be able to perform random access, DL reception or UL transmission in the cell2 while the DL scheduling and UL feedback in the cell1 shall be avoided. After successful RACH procedure of the cell2, UE is scheduled with PDSCH from cell1 and cell2 in alternative TTIs where both cell1 and cell2 belong to the same TAG. In the end the network sends a RRC message implying cell1 release to the UE. During T3, the handover delay $D_{\text{handover1}}$ for target cell addition need to be verified.

The start of T4 is the instant when the last TTI containing cell1 release command is sent to the UE. During T4, the UE shall accomplish the release actions within $D_{\text{handover2}}$.

Starting T5, the UE stops sending the periodical CSI report to the cell1.

Table A.6.3.1.7.2-1: Intra-frequency DAPS handover in FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.7.2-2: General test parameters synchronous Intra-frequency DAPS handover in FR1

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
A3-Offset	dB	0	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 5	
T3	s	1	

T4	ms	$D_{\text{handover2}}$	$D_{\text{Handover2}}$ is defined in clause 6.1.3.2.1
T5	ms	100	

Table A.6.3.1.7.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency DAPS handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2 - T5	T1	T2 - T5
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
BWP BW	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD			
	Config 2		CSI-RS.1.1 TDD			
	Config 3		CSI-RS.2.1 TDD			
reportConfigType			periodic		N/A	
reportQuantity			cri-RI-PMI-CQI		N/A	
CSI reporting periodicity	Config 1,2	slot	5		N/A	
	Config 3		10		N/A	
CSI reporting offset	Config 1,2	slot	3		N/A	
	Config 3		5		N/A	
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						

EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}		dBm/15kHz	-98			
N_{oc}^{Note2}	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	8	-1.5	-Infinity	0.36
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	9
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-Infinity	-89
	Config 3	dBm/SCS	-87	-87	-Infinity	-86
I_o^{Note3}	Config 1,2	dBm/ 9.36MHz	-61.41	-58.21	-61.41	-58.21
	Config 3	dBm/ 38.16MHz	-55.31	-52.11	-55.31	-52.11
Propagation condition			AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.3.1.7.3 Test Requirements

The UE shall start to transmit the PRACH to cell 2 less than 72 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The target cell add delay $D_{handover1}$ can be expressed as: $T_{RRC_procedure} + T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$, where:

$T_{RRC_procedure} = 10$ ms and is specified in clause 12 in TS 38.331 [2].

T_{search} , T_{IU} , $T_{processing}$, T_{Δ} and T_{margin} are defined in clause 6.1.1.2.2.

If the target cell is known, then $T_{search} = 0$ ms

$T_{IU} = 20$ ms in the test. T_{IU} is defined in clause 6.1.1.2.2.

$T_{\Delta} = 20$ ms in the test. T_{Δ} is defined in clause 6.1.1.2.2.

$T_{processing} = 20$ ms in the test. $T_{processing}$ is defined in clause 6.1.1.2.2.

$T_{margin} = 2$ ms in the test. T_{margin} is defined in clause 6.1.1.2.2.

This gives a total of 72 ms.

After successful RACH to cell 2 and until the start of time period T4, UE shall be able to receive PDSCH alternatively from cell 1 and cell 2. UE is not expected to transmit UL to both cell 1 and cell 2 in the same TTI.

The UE shall release cell 1 less than $D_{handover2} = (T_{RRC_procedure} + T_{interrupt2})$ from the beginning of time period T4.

NOTE: $D_{handover2}$ is defined in clause 6.1.3.2.1.

$T_{RRC_procedure} = 10$ ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt2}$ is defined in clause 6.1.3.2.2.

UE shall not report CSI to cell 1 during T5.

A.6.3.1.8 Intra-frequency asynchronous DAPS handover in FR1

A.6.3.1.8.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency DAPS handover requirements in asynchronous scenario specified in clause 6.1.3.2.

A.6.3.1.8.2 Test Parameters

Supported test configurations are shown in Table A.6.3.1.8.2-1. Both handover delay and interruption length are tested by using the parameters in Table A.6.3.1.8.2-2, and A.6.3.1.8.2-3.

The test consists of five successive time periods, with time durations of T1, T2, T3, T4, and T5 respectively.

Before the start of T1, the UE is connected to the cell1 and not aware of the cell2. The UE shall be configured with periodic CSI reporting for cell1. During T1, the UE does not have any timing information of the cell2.

Starting T2, the cell2 becomes detectable. During T2, the UE performs cell detection and measurements on the cell2 and shall send event report to the network. After receiving the event report A3, the network sends a RRC message implying DAPS handover to the UE.

The start of T3 is the instant when the last TTI containing DAPS handover command is sent to the UE. During T3, UE shall be able to perform random access, DL reception or UL transmission in the cell2 while the DL scheduling and UL feedback in the cell1 shall be avoided. After successful RACH procedure of the cell2, UE is scheduled with PDSCH from cell1 and cell2 in alternative TTIs where both cell1 and cell2 belong to the same TAG. In the end the network sends a RRC message implying cell1 release to the UE. During T3, the handover delay $D_{\text{handover1}}$ for target cell addition needs to be verified.

The start of T4 is the instant when the last TTI containing cell1 release command is sent to the UE by cell2. During T4, the UE shall accomplish the release actions within $D_{\text{handover2}}$.

Starting T5, the UE stops sending the periodical CSI report to the cell1.

Table A.6.3.1.8.2-1: Intra-frequency DAPS handover in FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.8.2-2: General test parameters Intra-frequency asynchronous DAPS handover in FR1

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
A3-Offset	dB	0	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		7 μ s	Asynchronous cells

T1	s	5	
T2	s	≤5	
T3	s	1	
T4	ms	D _{handover2}	D _{handover2} is defined in clause 6.1.3.2.1
T5	ms	100	

Table A.6.3.1.8.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency DAPS handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2 - T5	T1	T2 - T5
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW _{channel}	Config 1,2	MHz	10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
BWP BW	Config 1,2	MHz	10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 FDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD			
	Config 2		CSI-RS.1.1 TDD			
	Config 3		CSI-RS.2.1 TDD			
reportConfigType			periodic		N/A	
reportQuantity			cri-RI-PMI-CQI		N/A	
CSI reporting periodicity	Config 1,2	slot	5		N/A	
	Config 3		10		N/A	
CSI reporting offset	Config 1,2	slot	3		N/A	
	Config 3		5		N/A	
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15			
	Config 3		30			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15			
	Config 3		30			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						

EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}		dBm/15kHz	-98			
N_{oc}^{Note2}	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	8	-1.5	-Infinity	0.36
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	9
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-Infinity	-89
	Config 3		-87	-87	-Infinity	-86
I_o^{Note3}	Config 1,2	dBm/ 9.36MHz	-61.41	-58.21	-61.41	-58.21
	Config 3	dBm/ 38.16MHz	-55.31	-52.11	-55.31	-52.11
Propagation condition			AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.3.1.8.3 Test Requirements

The UE shall start to transmit the PRACH to cell 2 less than 72 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The target cell add delay $D_{handover1}$ can be expressed as: $T_{RRC_procedure} + T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$, where:

$T_{RRC_procedure} = 10$ ms and is specified in clause 12 in TS 38.331 [2].

T_{search} , T_{IU} , $T_{processing}$, T_{Δ} and T_{margin} are defined in clause 6.1.1.2.2.

If the target cell is known, then $T_{search} = 0$ ms

$T_{IU} = 20$ ms in the test. T_{IU} is defined in clause 6.1.1.2.2.

$T_{\Delta} = 20$ ms in the test. T_{Δ} is defined in clause 6.1.1.2.2.

$T_{processing} = 20$ ms in the test. $T_{processing}$ is defined in clause 6.1.1.2.2.

$T_{margin} = 2$ ms in the test. T_{margin} is defined in clause 6.1.1.2.2.

This gives a total of 72 ms.

After successful RACH to cell 2 and until the start of time period T4, UE shall be able to receive PDSCH alternatively from cell 1 and cell 2. UE is not expected to transmit UL to both cell 1 and cell 2 in the same TTI.

The UE shall release cell 1 less than $D_{handover2} = (T_{RRC_procedure} + T_{interrupt2})$ from the beginning of time period T4.

NOTE: $D_{handover2}$ is defined in clause 6.1.3.2.1.

$T_{\text{RRC_procedure}} = 10$ ms and is specified in clause 12 in TS 38.331 [2].

$T_{\text{interrupt2}}$ is defined in clause 6.1.3.2.2.

UE shall not report CSI to cell 1 during T5.

A.6.3.1.9 Intra-band inter-frequency synchronous DAPS handover test in SA for FR1

A.6.3.1.9.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra-band inter-frequency synchronous DAPS handover requirements specified in clause 6.1.3.2.

A.6.3.1.9.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.9.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.9.2-2, and A.6.3.1.9.2-3.

The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. The UE shall be configured with periodic CSI reporting for cell1. The test scenario comprises of two carriers and one cell on each carrier. Gap pattern ID gp0 as specified in Table 9.1.2-1 is configured before T2 in the test case.

Starting T2, Cell 2 becomes known to the UE. During T2, the UE shall report Event A3. After receiving the Event A3, the test system shall send a RRC message implying DAPS handover to the UE.

T3 is defined as the end of the last TTI containing the RRC message implying DAPS handover. During T3 UE shall be able to perform random access to cell 2. Cell 1 is continuously scheduled in DL during T3. DL schedule and UL feedback to cell 1 shall be avoided when UE is required to perform DL reception or UL transmission in PRACH procedure in cell 2, except preamble transmission. At the end of T3 cell 2 shall send an RRC message implying cell 1 release command.

T4 is defined as the end of the last TTI containing the RRC message implying DAPS handover. Cell 2 is continuously scheduled in DL during T4. During T4, the UE shall perform source cell release.

Starting T5, the UE shall stop sending CSI report to the source cell. And the test system shall observe the periodic reporting of CSI for cell 1 during T5.

Table A.6.3.1.9.2-1: Intra-band inter-frequency synchronous DAPS handover in SA for FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.9.2-2: General test parameters for intra-band inter-frequency synchronous DAPS handover test in SA for FR1

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
A3-Offset	dB	0	

Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		0 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 5	
T3	s	1	
T4	ms	10 + T _{interrupt2}	T _{interrupt2} is defined in clause 6.1.3.2.2 Table 6.1.3.2.2-5
T5	ms	100	

Table A.6.3.1.9.2-3: Cell specific test parameters for intra-band inter-frequency synchronous DAPS handover test in SA for FR1

Parameter		Unit	Cell 1		Cell 2	
			T1	T2 - T5	T1	T2 - T5
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
BWP BW	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD			
	Config 2		CSI-RS.1.1 TDD			
	Config 3		CSI-RS.2.1 TDD			
reportConfigType			periodic		N/A	
reportQuantity			cri-RI-PMI-CQI		N/A	
CSI reporting periodicity	Config 1,2	slot	5		N/A	
	Config 3		10		N/A	
CSI reporting offset	Config 1,2	slot	3		N/A	
	Config 3		5		N/A	
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			

BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}		dBm/15kHz	-98			
N_{oc}^{Note2}	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	8	8	-Infinity	8
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	8
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-Infinity	-90
	Config 3	dBm/SCS	-87	-87	-Infinity	-87
I_o^{Note3}	Config 1,2	dBm/ 9.36MHz	-61.41	-61.41	-70.05	-61.41
	Config 3	dBm/ 38.16MHz	-55.31	-55.31	-63.94	-55.31
Propagation condition			AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.3.1.9.3 Test Requirements

The UE shall start to transmit the PRACH to cell 2 less than 72 ms from the beginning of time period T3.

During T3 UE is allowed to cause $T_{interrupt1}$ interruption to cell 1. $T_{interrupt1}$ is defined in clause 6.1.3.2.2 Table 6.1.3.2.2-2. When UE is transmitting PRACH preamble to cell 2, interruption to cell 1 is allowed.

During T4 UE is allowed to cause $T_{interrupt2}$ interruption to cell 1. $T_{interrupt2}$ is defined in clause 6.1.3.2.2 Table 6.1.3.2.2-5.

UE shall finish cell 1 release in T4 and shall not send any CSI reports to cell 1 during T5.

The rate of correct handovers observed during repeated tests shall be at least 90%.

A.6.3.1.10 Intra-band inter-frequency asynchronous DAPS handover test in SA for FR1

A.6.3.1.10.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra-band inter-frequency asynchronous DAPS handover requirements specified in clause 6.1.3.2.

A.6.3.1.10.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.10.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.10.2-2, and A.6.3.1.10.2-3.

The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. The UE shall be configured with periodic CSI reporting for cell1. The test scenario comprises of two carriers and one cell on each carrier. Gap pattern ID gp0 as specified in Table 9.1.2-1 is configured before T2 in the test case.

Starting T2, Cell 2 becomes known to the UE. During T2, the UE shall report Event A3. After receiving the Event A3, the test system shall send a RRC message implying DAPS handover to the UE.

T3 is defined as the end of the last TTI containing the RRC message implying DAPS handover. During T3 UE shall be able to perform random access to cell 2. Cell 1 is continuously scheduled in DL during T3. DL schedule and UL feedback to cell 1 shall be avoided when UE is required to perform DL reception or UL transmission in PRACH procedure in cell 2, except preamble transmission. At the end of T3 cell 2 shall send an RRC message implying cell 1 release command.

T4 is defined as the end of the last TTI containing the RRC message implying DAPS handover. Cell 2 is continuously scheduled in DL during T4. During T4, the UE shall perform source cell release.

Starting T5, the UE shall stop sending CSI report to the source cell. And the test system shall observe the periodic reporting of CSI for cell 1 during T5.

Table A.6.3.1.10.2-1: Intra-band inter-frequency asynchronous DAPS handover in SA for FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.10.2-2: General test parameters for intra-band inter-frequency asynchronous DAPS handover test in SA for FR1

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
A3-Offset	dB	0	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		10 μ s	Asynchronous cells
T1	s	5	
T2	s	≤ 5	
T3	s	1	
T4	ms	10 + T _{interrupt2}	T _{interrupt2} is defined in clause 6.1.3.2.2 Table 6.1.3.2.2-5
T5	ms	100	

Table A.6.3.1.10.2-3: Cell specific test parameters for intra-band inter-frequency asynchronous DAPS handover test in SA for FR1

Parameter		Unit	Cell 1		Cell 2	
			T1	T2 - T5	T1	T2 - T5
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
TDD configuration	Config 1		Not Applicable			
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52			
BWP BW	Config 1	MHz	10: N _{RB,c} = 52			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
TRS configuration	Config 1		TRS.1.1 FDD			
OCNG Patterns			OP.1			
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD			
reportConfigType			periodic		N/A	
reportQuantity			cri-RI-PMI-CQI		N/A	
CSI reporting periodicity	Config 1	slot	5		N/A	
CSI reporting offset	Config 1	slot	3		N/A	
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1		SSB.1 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	15 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1	kHz	15 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}		dBm/15kHz	-98			
N_{oc}^{Note2}	Config 1	dBm/SCS	-98			
$\hat{E}_s / I_{ot}$		dB	8	8	-Infinity	8
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	8
SSB _{RP}	Config 1	dBm/SCS	-90	-90	-Infinity	-90
I_o^{Note3}	Config 1	dBm/ 9.36MHz	-61.41	-61.41	-70.05	-61.41
Propagation condition			AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.3.1.10.3 Test Requirements

The UE shall start to transmit the PRACH to cell 2 less than 72 ms from the beginning of time period T3.

During T3 UE is allowed to cause $T_{\text{interrupt1}}$ interruption to cell 1. $T_{\text{interrupt1}}$ is defined in clause 6.1.3.2.2 Table 6.1.3.2.2-2. When UE is transmitting PRACH preamble to cell 2, interruption to cell 1 is allowed.

During T4 UE is allowed to cause $T_{\text{interrupt2}}$ interruption to cell 1. $T_{\text{interrupt2}}$ is defined in clause 6.1.3.2.2 Table 6.1.3.2.2-5.

UE shall finish cell 1 release in T4 and shall not send any CSI reports to cell 1 during T5.

The rate of correct handovers observed during repeated tests shall be at least 90%.

A.6.3.1.11 Inter-band inter-frequency synchronous DAPS handover from FR1 to FR1

A.6.3.1.11.1 Test Purpose and Environment

This test is to verify the requirement for the FR1-to-FR1 inter-band inter-frequency synchronous DAPS handover requirements specified in clause 6.1.3.2.

A.6.3.1.11.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.11.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.11.2-2, A.6.3.1.11.2-3 and A.6.3.1.11.2-4.

The test scenario comprises of two bands each with one cell. The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively.

Before the start of T1, the UE is connected to Cell 1 (source PCell) on radio channel 1 but is not aware of Cell 2 (neighbour cell) on radio channel 2. The UE shall be configured with periodic CSI reporting for cell1. During T1, the UE shall not have any timing information of Cell 2.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event A3 is configured for neighbour cell (Cell 2), and the UE is configured with the measurement gaps (gap pattern ID # 0). Starting T2, Cell 2 becomes known to the UE. During T2, the UE shall report Event A3. After receiving the Event A3, the test system shall send a RRC message implying DAPS handover to the UE.

The start of T3 is the instant when the last TTI containing the RRC message implying DAPS handover to Cell 2 (target PCell) is sent to the UE. During T3, the UE shall be able to perform random access to Cell 2. DL schedule and UL feedback to cell 1 shall be avoided when UE is required to perform DL reception or UL transmission in PRACH procedure in cell 2, except preamble transmission. After the RACH procedure is completed, the test system shall send a RRC message to the UE to release Cell 1 (source cell) on radio channel 1.

The start of T4 is the instant when the last TTI containing the RRC message implying source cell release is sent to the UE. During T4, the UE shall perform source cell release.

Starting T5, the UE shall stop sending CSI report to the source cell.

Table A.6.3.1.11.2-1: Inter-band inter-frequency synchronous DAPS handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

4	Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
5	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
7	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
8	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
9	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.11.2-2: General test parameters for inter-band inter-frequency synchronous DAPS handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	PCell on RF channel number 1
	Neighbouring cell		Cell 2	Neighbour cell on RF channel number 2
Final condition	Active cell		Cell 2	PCell on RF channel number 2
	Neighbouring cell		Cell 1	Neighbour cell on RF channel number 1
A3-Offset		dB	-6	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells		μs	33	Synchronous cells
DRX			OFF	
Measurement gap pattern Id			#0	Gaps are configured before T2.
T1		s	5	
T2		s	<5	
T3		s	<0.5	
T4		ms	10+T _{interrupt2}	T _{interrupt2} as defined in Table 6.1.3.2.2-6 for synchronous DAPS HO
T5		ms	100	

Table A.6.3.1.11.2-3: Cell specific test parameters for inter-band inter-frequency synchronous DAPS handover from FR1 to FR1 (Cell 1)

Parameter		Unit	Cell 1	
			T1	T2 – T5
NR RF Channel Number			1	
Duplex mode	Config 1,4,7		FDD	
	Config 2,3,5,6,8,9		TDD	
TDD configuration	Config 1,4,7		Not Applicable	
	Config 2,5,8		TDDConf.1.1	
	Config 3,6,9		TDDConf.2.1	
BW _{channel}	Config 1,4,7	MHz	10: N _{RB,c} = 52	
	Config 2,5,8		10: N _{RB,c} = 52	
	Config 3,6,9		40: N _{RB,c} = 106	
BWP BW	Config 1,4,7	MHz	10: N _{RB,c} = 52	
	Config 2,5,8		10: N _{RB,c} = 52	

		Config 3,6,9		40: N _{RB,c} = 106	
TRS configuration		Config 1,4,7		TRS.1.1 FDD	
		Config 2,5,8		TRS.1.1 TDD	
		Config 3,6,9		TRS.1.2 TDD	
DRX Cycle			ms	Not Applicable	
PDSCH Reference measurement channel		Config 1,4,7		SR.1.1 FDD	
		Config 2,5,8		SR.1.1 TDD	
		Config 3,6,9		SR.2.1 TDD	
CORESET Reference Channel		Config 1,4,7		CR.1.1 FDD	
		Config 2,5,8		CR.1.1 TDD	
		Config 3,6,9		CR.2.1 TDD	
OCNG Patterns				OP.1	
CSI-RS configuration for CSI reporting		Config 1,4,7		CSI-RS.1.1 FDD	
		Config 2,5,8		CSI-RS.1.1 TDD	
		Config 3,6,9		CSI-RS.2.1 TDD	
reportConfigType				periodic	
reportQuantity				cri-RI-PMI-CQI	
CSI reporting periodicity		Config 1,2,4,5,7,8	slot	5	
		Config 3,6,9		10	
CSI reporting offset		Config 1,2,4,5,7,8	slot	3	
		Config 3,6,9		5	
SMTC Configuration				SMTC.1	
SSB Configuration		Config 1,2,4,5,7,8		SSB.1 FR1	
		Config 3,6,9		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing		Config 1,2,4,5,7,8	kHz	15 kHz	
		Config 3,6,9		30 kHz	
PUCCH/PUSCH subcarrier spacing		Config 1,2,4,5,7,8	kHz	15 kHz	
		Config 3,6,9		30 kHz	
PRACH configuration				FR1 PRACH configuration 2	
BWP		Initial DL BWP		DLBWP.0.1	
		Dedicated DL BWP		DLBWP.1.3	
		Initial UL BWP		ULBWP.0.1	
		Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N _{oc} ^{Note2}			dBm/15kHz	-98	-98
N _{oc} ^{Note2}		Config 1,2,4,5,7,8	dBm/SCS	-98	-98
		Config 3,6,9		-95	-95
$\hat{E}_s/I_{ot}$			dB	4	4
$\hat{E}_s/N_{oc}$			dB	4	4
SSB_RP		Config 1,2,4,5,7,8	dBm/SCS	-94	-94
		Config 3,6,9	dBm/SCS	-91	-91
I ₀ ^{Note3}		Config 1,2,4,5,7,8	dBm/ 9.36MHz	-64.59	-64.59
		Config 3,6,9	dBm/ 38.16MHz	-58.49	-58.49
Propagation condition			-	AWGN	

- Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 3: α levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.3.1.11.2-4: Cell specific test parameters for inter-band inter-frequency synchronous DAPS handover from FR1 to FR1 (Cell 2)

Parameter		Unit	Cell 2	
			T1	T2-T5
NR RF Channel Number			2	
Duplex mode	Config 1,2,3		FDD	
	Config 4,5,6,7,8,9		TDD	
TDD configuration	Config 1,2,3		Not Applicable	
	Config 4,5,6		TDDConf.1.1	
	Config 7,8,9		TDDConf.2.1	
BW _{channel}	Config 1,2,3	MHz	10: N _{RB,c} = 52	
	Config 4,5,6		10: N _{RB,c} = 52	
	Config 7,8,9		40: N _{RB,c} = 106	
BWP BW	Config 1,2,3	MHz	10: N _{RB,c} = 52	
	Config 4,5,6		10: N _{RB,c} = 52	
	Config 7,8,9		40: N _{RB,c} = 106	
TRS configuration	Config 1,2,3		TRS.1.1 FDD	
	Config 4,5,6		TRS.1.1 TDD	
	Config 7,8,9		TRS.1.2 TDD	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,2,3		SR.1.1 FDD	
	Config 4,5,6		SR.1.1 TDD	
	Config 7,8,9		SR2.1 TDD	
CORESET Reference Channel	Config 1,2,3		CR.1.1 FDD	
	Config 4,5,6		CR.1.1 TDD	
	Config 7,8,9		CR2.1 TDD	
OCNG Patterns			OCNG pattern 1	
CSI-RS configuration for CSI reporting	Config 1,2,3		CSI-RS.1.1 FDD	
	Config 4,5,6		CSI-RS.1.1 TDD	
	Config 7,8,9		CSI-RS.2.1 TDD	
SMTC Configuration			SMTC pattern 1	
SSB Configuration	Config 1,2,3,4,5,6		SSB.1 FR1	
	Config 7,8,9		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,3,4,5,6	kHz	15 kHz	
	Config 7,8,9		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,3,4,5,6	kHz	15 kHz	
	Config 7,8,9		30 kHz	
PRACH configuration			FR1 PRACH configuration 2	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				

EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc}^{Note2}		dBm/15kHz	-98	-98
N_{oc}^{Note2}	Config 1,2,3,4,5,6	dBm/SCS	-98	-98
	Config 7,8,9		-95	-95
$\hat{E}_s / I_{ot}$		dB	-Infinity	4
$\hat{E}_s / N_{oc}$		dB	-Infinity	4
SSB_RP	Config 1,2,3,4,5,6	dBm/SCS	-Infinity	-94
	Config 7,8,9	dBm/SCS	-Infinity	-91
I_o^{Note3}	Config 1,2,3,4,5,6	dBm/ 9.36MHz	-70.05	-64.59
	Config 7,8,9	dBm/ 38.16MHz	-63.94	-58.49
Propagation condition		-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.3.1.11.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3. During $D_{handover1}$, the interruption on Cell 1 shall not exceed $T_{interrupt1}$ as defined in Table 6.1.3.2.2-3 for synchronous DAPS HO.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay $D_{handover1}$ can be expressed as: $T_{RRC_procedure} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$, where:

$T_{RRC_procedure} = 10$ ms and is specified in clause 12 in TS 38.331 [2].

$T_{IU} = 20$ ms in the test. T_{IU} is defined in clause 6.1.1.2.2.

$T_{\Delta} = 20$ ms in the test. T_{Δ} is defined in clause 6.1.1.2.2.

$T_{processing} = 20$ ms in the test. $T_{processing}$ is defined in clause 6.1.1.2.2.

$T_{margin} = 2$ ms in the test. T_{margin} is defined in clause 6.1.1.2.2.

This gives a total of 72 ms.

The UE shall complete to release Cell 1 less than $(10 \text{ ms} + T_{interrupt2})$ from the beginning of time period T4. During $D_{handover2}$, the interruption on Cell 2 shall not exceed $T_{interrupt2}$ as defined in Table 6.1.3.2.2-6 for synchronous DAPS HO.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay $D_{handover2}$ can be expressed as: $T_{RRC_procedure} + T_{interrupt2}$, where:

$T_{RRC_procedure} = 10$ ms and is specified in clause 12 in TS 38.331 [2].

A.6.3.1.12 Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR1

A.6.3.1.12.1 Test Purpose and Environment

This test is to verify the requirement for the FR1-to-FR1 inter-band inter-frequency asynchronous DAPS handover requirements specified in clause 6.1.3.2.

A.6.3.1.12.2 Test Parameters

Supported test configurations are shown in table A.6.3.1.12.2-1. Both handover delay and interruption length are tested by using the parameters in table A.6.3.1.12.2-2, A.6.3.1.12.2-3 and A.6.3.1.12.2-4.

The test scenario comprises of two bands each with one cell. The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively.

Before the start of T1, the UE is connected to Cell 1 (source PCell) on radio channel 1 but is not aware of Cell 2 (neighbour cell) on radio channel 2. The UE shall be configured with periodic CSI reporting for cell1. During T1, the UE shall not have any timing information of Cell 2.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event A3 is configured for neighbour cell (Cell 2), and the UE is configured with the measurement gaps (gap pattern ID # 0). Starting T2, Cell 2 becomes known to the UE. During T2, the UE shall report Event A3. After receiving the Event A3, the test system shall send a RRC message implying DAPS handover to the UE.

The start of T3 is the instant when the last TTI containing the RRC message implying DAPS handover to Cell 2 (target PCell) is sent to the UE. During T3, the UE shall be able to perform random access to Cell 2. DL schedule and UL feedback to cell 1 shall be avoided when UE is required to perform DL reception or UL transmission in PRACH procedure in cell 2, except preamble transmission. After the RACH procedure is completed, the test system shall send a RRC message to the UE to release Cell 1 (source cell) on radio channel 1.

The start of T4 is the instant when the last TTI containing the RRC message implying source cell release is sent to the UE. During T4, the UE shall perform source cell release.

Starting T5, the UE shall stop sending CSI report to the source cell.

Table A.6.3.1.12.2-1: Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
5	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
7	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
8	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
9	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations

Table A.6.3.1.12.2-2: General test parameters for inter-band inter-frequency asynchronous DAPS handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	-4	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells	Config 1,2,4,5	ms	0.5	Asynchronous cells
	Config 3,6,7,8,9	ms	0.25	
DRX			OFF	
Measurement gap pattern Id			#0	Gaps are configured before T2.
T1		s	5	
T2		s	<5	
T3		s	<0.5	
T4		ms	10+T _{interrupt2}	T _{interrupt2} as defined in Table 6.1.3.2.2-6 for asynchronous DAPS HO.
T5		ms	100	

Table A.6.3.1.12.2-3: Cell specific test parameters for inter-band inter-frequency asynchronous DAPS handover from FR1 to FR1 (Cell 1)

Parameter		Unit	Cell 1	
			T1	T2 – T5
NR RF Channel Number			1	
Duplex mode	Config 1,4,7		FDD	
	Config 2,3,5,6,8,9		TDD	
TDD configuration	Config 1,4,7		Not Applicable	
	Config 2,5,8		TDDConf.1.1	
	Config 3,6,9		TDDConf.2.1	
BW _{channel}	Config 1,4,7	MHz	10: N _{RB,c} = 52	
	Config 2,5,8		10: N _{RB,c} = 52	
	Config 3,6,9		40: N _{RB,c} = 106	
BWP BW	Config 1,4,7	MHz	10: N _{RB,c} = 52	
	Config 2,5,8		10: N _{RB,c} = 52	
	Config 3,6,9		40: N _{RB,c} = 106	
TRS configuration	Config 1,4,7		TRS.1.1 FDD	
	Config 2,5,8		TRS.1.1 TDD	
	Config 3,6,9		TRS.1.2 TDD	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4,7		SR.1.1 FDD	
	Config 2,5,8		SR.1.1 TDD	
	Config 3,6,9		SR.2.1 TDD	
CORESET Reference Channel	Config 1,4,7		CR.1.1 FDD	
	Config 2,5,8		CR.1.1 TDD	
	Config 3,6,9		CR.2.1 TDD	
OCNG Patterns			OP.1	
CSI-RS configuration for CSI reporting	Config 1,4,7		CSI-RS.1.1 FDD	
	Config 2,5,8		CSI-RS.1.1 TDD	
	Config 3,6,9		CSI-RS.2.1 TDD	

reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2,4,5,7,8	slot	5	
	Config 3,6,9		10	
CSI reporting offset	Config 1,2,4,5,7,8	slot	3	
	Config 3,6,9		5	
SMTC Configuration			SMTC.1	
SSB Configuration	Config 1,2,4,5,7,8		SSB.1 FR1	
	Config 3,6,9		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6,9		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6,9		30 kHz	
PRACH configuration			FR1 PRACH configuration 2	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc}^{Note2}		dBm/15kHz	-98	-98
N_{oc}^{Note2}	Config 1,2,4,5,7,8	dBm/SCS	-98	-98
	Config 3,6,9		-95	-95
$\hat{E}_s/I_{ot}$		dB	4	4
$\hat{E}_s/N_{oc}$		dB	4	4
SSB_RP	Config 1,2,4,5,7,8	dBm/SCS	-94	-94
	Config 3,6,9	dBm/SCS	-91	-91
I_o^{Note3}	Config 1,2,4,5,7,8	dBm/ 9.36MHz	-64.59	-64.59
	Config 3,6,9	dBm/ 38.16MHz	-58.49	-58.49
Propagation condition		-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Table A.6.3.1.12.2-4: Cell specific test parameters for inter-band inter-frequency asynchronous DAPS handover from FR1 to FR1 (Cell 2)

Parameter		Unit	Cell 2	
			T1	T2-T5
NR RF Channel Number			2	
Duplex mode	Config 1,2,3		FDD	

	Config 4,5,6,7,8,9		TDD	
TDD configuration	Config 1,2,3		Not Applicable	
	Config 4,5,6		TDDConf.1.1	
	Config 7,8,9		TDDConf.2.1	
BW _{channel}	Config 1,2,3	MHz	10: N _{RB,c} = 52	
	Config 4,5,6		10: N _{RB,c} = 52	
	Config 7,8,9		40: N _{RB,c} = 106	
BWP BW	Config 1,2,3	MHz	10: N _{RB,c} = 52	
	Config 4,5,6		10: N _{RB,c} = 52	
	Config 7,8,9		40: N _{RB,c} = 106	
TRS configuration	Config 1,2,3		TRS.1.1 FDD	
	Config 4,5,6		TRS.1.1 TDD	
	Config 7,8,9		TRS.1.2 TDD	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,2,3		SR.1.1 FDD	
	Config 4,5,6		SR.1.1 TDD	
	Config 7,8,9		SR2.1 TDD	
CORESET Reference Channel	Config 1,2,3		CR.1.1 FDD	
	Config 4,5,6		CR.1.1 TDD	
	Config 7,8,9		CR2.1 TDD	
OCNG Patterns			OCNG pattern 1	
CSI-RS configuration for CSI reporting	Config 1,2,3		CSI-RS.1.1 FDD	
	Config 4,5,6		CSI-RS.1.1 TDD	
	Config 7,8,9		CSI-RS.2.1 TDD	
SMTC Configuration			SMTC pattern 1	
SSB Configuration	Config 1,2,3,4,5,6		SSB.1 FR1	
	Config 7,8,9		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,3,4,5,6	kHz	15 kHz	
	Config 7,8,9		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,3,4,5,6	kHz	15 kHz	
	Config 7,8,9		30 kHz	
PRACH configuration			FR1 PRACH configuration 2	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc}^{Note2}		dBm/15kHz	-98	-98
N_{oc}^{Note2}	Config 1,2,3,4,5,6	dBm/SCS	-98	-98
	Config 7,8,9		-95	-95
$\hat{E}_s/I_{ot}$		dB	-Infinity	4
$\hat{E}_s/N_{oc}$		dB	-Infinity	4
SSB_RP	Config 1,2,3,4,5,6	dBm/SCS	-Infinity	-94
	Config 7,8,9	dBm/SCS	-Infinity	-91
I _o ^{Note3}	Config 1,2,3,4,5,6	dBm/ 9.36MHz	-70.05	-64.59
	Config 7,8,9	dBm/	-63.94	-58.49

		38.16MHz	
Propagation condition		-	AWGN
Note 1:	OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		

A.6.3.1.12.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3. During $D_{handover1}$, the interruption on Cell 1 shall not exceed $T_{interrupt1}$ as defined in Table 6.1.3.2.2-3 for asynchronous DAPS HO.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay $D_{handover1}$ can be expressed as: $T_{RRC_procedure} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$, where:

$T_{RRC_procedure} = 10$ ms and is specified in clause 12 in TS 38.331 [2].

$T_{IU} = 20$ ms in the test. T_{IU} is defined in clause 6.1.1.2.2.

$T_{\Delta} = 20$ ms in the test. T_{Δ} is defined in clause 6.1.1.2.2.

$T_{processing} = 20$ ms in the test. $T_{processing}$ is defined in clause 6.1.1.2.2.

$T_{margin} = 2$ ms in the test. T_{margin} is defined in clause 6.1.1.2.2.

This gives a total of 72 ms.

The UE shall complete to release Cell 1 less than $(10 \text{ ms} + T_{interrupt2})$ from the beginning of time period T4. During $D_{handover2}$, the interruption on Cell 2 shall not exceed $T_{interrupt2}$ as defined in Table 6.1.3.2.2-6 for asynchronous DAPS HO.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay $D_{handover2}$ can be expressed as: $T_{RRC_procedure} + T_{interrupt2}$, where:

$T_{RRC_procedure} = 10$ ms and is specified in clause 12 in TS 38.331 [2].

A.6.3.1.13 SA NR - E-UTRAN with NR PSCell addition in FR1

A.6.3.1.13.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover with PSCell addition when operating in standalone (SA) operation with PCell in FR1 where target PCell and target PSCell are unknown. This test shall verify the Handover with PSCell from NR SA to EN-DC requirements as specified in clause 6.1.5.1.

The test comprises of two NR carrier and one E-UTRA carrier. There are three cells and one cell on each carrier. Cell 1 is the NR PCell, Cell 2 is an inter-RAT E-UTRAN neighbour cell and Cell 3 is an NR neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2 and Cell 3. Starting T2, Cell 2 and Cell 3 becomes detectable

A RRC message implying handover with PSCell shall be sent to the UE during period T1. The start of T2 is the instant when the last TTI containing the RRC message implying handover with PSCell is sent to the UE. Before T2, the UE does not have any information of Cell 3. The handover with PSCell message shall contain Cell 2 and Cell 3 as the target cells and the SMTC for Cell 3 is configured in *RRCConnectionReconfiguration*.

Supported test configurations are shown in table A.6.3.1.13.1-1. General test parameters are provided in Table A.6.3.1.13.1-2. Cell specific test parameters for Cell 1, Cell 2 and Cell 3 are provided in Tables A.6.3.1.13.1-3, A.6.3.1.13.1-4 and A.6.3.1.13.1-5 respectively.

Table A.6.3.1.13.1-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.13.1-2: General test parameters for Handover with PSCell from NR SA to EN-DC

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	2 NR carrier frequency is used in the test
LTE RF Channel Number		3	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell	Cell 1	NR cell
	Neighbouring cell	Cell 2, Cell3	E-UTRAN cell and NR Cell
Final condition	Active cell	Cell 2 and Cell 3	
DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure
Time offset between Cell 1 and Cell 2		3 ms	Asynchronous cells
T1	s	5	
T2	s	≤5	

Table A.6.3.1.13.1-3: Cell specific test parameters for Handover with PSCell from NR SA to EN-DC (Cell1)

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD Configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
BW _{channel}	MHz	1, 4	10: N _{RB,c} = 52 (FDD)	
		2, 5	10: N _{RB,c} = 52 (TDD)	
		3, 6	40: N _{RB,c} = 106 (TDD)	
PDSCH reference measurement channel		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
CORSET reference channel		1, 4	CR.1.1 FDD	

			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
TRS configuration			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6	OP.1	
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	
	Initial UL BWP			ULBWP.0.1	
	Dedicated UL BWP			ULBWP.1.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} ^{Note2}	dBm/15 KHz		1, 2, 3, 4, 5, 6	-100	-100
N_{oc} ^{Note2}	dBm/SCS		1, 2, 4, 5	-100	-100
			3, 6	-97	-97
$\hat{E}_s/N_{oc}$	dB		1, 2, 3, 4, 5, 6	12	-4
$\hat{E}_s/I_{ot}$ ^{Note3}	dB		1, 2, 3, 4, 5, 6	12	-4
SS-RSRP ^{Note3}	dBm/SCS		1, 2, 4, 5	-88	-104
			3, 6	-85	-101
I_o ^{Note3}	dBm/9.36 MHz		1, 2, 4, 5	-59.78	-70.59
	dBm/38.16 MHz		3, 6	-53.68	-64.49
Propagation condition			1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6	1x2 Low	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Table A.6.3.1.13.1-4: Cell specific test parameters for Handover with PSCell from NR SA to EN-DC (Cell 2)

Parameter	Unit	Configuration	Cell 2
-----------	------	---------------	--------

			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	3	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PRACH Configuration ^{Note2}		1, 2, 3	4	
		4, 5, 6	53	
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note3}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note4}				
OCNG_RB ^{Note4}				
N _{oc} ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	78
$\hat{E}_s/I_{ot}$ ^{Note6}	dB	1, 2, 3, 4, 5, 6	-Infinity	78
RSRP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-90
SCH_RP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-90
I ₀ ^{Note6}	dBm/9MHz	1, 2, 3, 4, 5, 6	-67.21 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	

Antenna Configuration and Correlation Matrix Note7		1, 2, 3, 4, 5, 6	1x2 Low
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23]. Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23]. Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively. Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 6: $\bar{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].			

Table A.6.3.1.13.1-5: Cell specific test parameters for Handover with PSCell from NR SA to EN-DC (Cell 3)

Parameter		Unit	Configuration	Cell 3	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	2	
Duplex mode			1, 4	FDD	
			2, 3, 5, 6	TDD	
TDD Configuration			2, 5	TDDConf.1.1	
			3, 6	TDDConf.2.1	
BW _{channel}		MHz	1, 4	10: N _{RB,c} = 52 (FDD)	
			2, 5	10: N _{RB,c} = 52 (TDD)	
			3, 6	40: N _{RB,c} = 106 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
CORSET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
TRS configuration			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
PRACH configuration			1, 2, 3, 4, 5, 6	FR1 PRACH configuration 1	
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6	OP.1	
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	
	Initial UL BWP			ULBWP.0.1	
	Dedicated UL BWP			ULBWP.1.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					

EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}^{Note2}	dBm/15 KHz	1, 2, 3, 4, 5, 6	-100	-85
N_{oc}^{Note2}	dBm/SCS	1, 2, 4, 5	-100	-85
		3, 6	-100	-82
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	0
$\hat{E}_s/I_{ot}^{Note3}$	dB	1, 2, 3, 4, 5, 6	-Infinity	0
SS-RSRP ^{Note3}	dBm/SCS	1, 2, 4, 5	-Infinity	-85
		3, 6	-Infinity	-82
I_o^{Note3}	dBm/9.36 MHz	1, 2, 4, 5	-72.05	-57
	dBm/38.16 MHz	3, 6	-68.96	-51
Propagation condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.3.1.13.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 175 ms from the beginning of time period T2.

The UE shall start to transmit the PRACH to Cell 3 less than 270 ms from the beginning of time period T2.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in clause 6.1.5.1.

$T_{interrupt}$ = 125 ms in the test; $T_{interrupt}$ is defined in clause 6.1.5.1.

The PSCell addition time can be expressed as: $T_{RRC_delay} + T_{processing} + T_{search_HO} + T_{search_PSCell} + T_{\Delta} + T_{PSCell_DU} + 2$ ms which is defined in clause 6.1.5.1

The rate of correct handovers observed during repeated tests shall be at least 90%.

A.6.3.1.14 SA NR - E-UTRAN handover with NR FR1 PSCell addition

A.6.3.1.14.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct SA inter-RAT handover from NR to E-UTRAN with FR1 PSCell addition when operating in standalone (SA) operation with PCell in FR1, for the case where the PSCell is known to the UE at the time of addition and SMTC of target known PSCell is not present in

RRCConnectionReconfiguration. This test shall verify delay requirements of inter-RAT handover from NR to E-UTRAN and FR1 PSCell addition as specified in clause 6.1.5.

The test comprises of two NR cells and one E-UTRA cell. Cell 1 is the NR PCell, Cell 2 is an inter-RAT E-UTRAN neighbour cell and Cell 3 is the target NR PSCell, on radio channel 1 in FR1, radio channel 2 in E-UTRAN and radio channel 3 in FR1, respectively.

In this test, inter-RAT handover from NR to E-UTRAN and FR1 PSCell addition are performed in parallel processing. The test consists of successive time periods for inter-RAT handover and FR1 PSCell addition with time durations of T1, T2 and T3 respectively.

At the start of time duration T1, the UE does not have any timing information of Cell 2 and Cell 3, and the UE is only monitoring Cell 1. During T1, only Cell1 is known to the UE.

Before the start of T2, the test system shall send measurement control information including measurement gap configuration and event-triggered reporting configuration with event B2 for neighbour Cell 2 and event B1 for Cell 3. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 begins.

Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report, and the Cell 3 (PSCell-to-be) on radio channel 3 becomes known to the UE at the time of addition. The RRC message implying handover with PSCell shall be sent to the UE during period T2 after the UE has reported Event B2 and Event B1. After receiving both Event B2 and Event B1 the test system shall send a RRC message to the UE to release the measurement gaps.

The point in time at which the RRC message implying handover with PSCell is received at the UE antenna connector defines the start of period T3 and T3'. The handover with PSCell message shall contain Cell 2 as the target cell and Cell 3 as PSCell-to-be added. The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added.

During T3, the UE shall carry out random access (i.e., transmit the PRACH) towards the Cell 2. Reception by the test system of the PRACH preamble defines the end of T3.

During T3', the UE shall carry out random access (i.e., transmit the PRACH) towards the Cell 3. Reception by the test system of the PRACH preamble defines the start of period T4'.

During T4', the UE shall send periodic CSI reports in PSCell and the test system shall observe the periodic reporting of CSI for PSCell.

Supported test configurations are shown in table A.6.3.1.14.1-1. General test parameters are provided in Table A.6.3.1.14.1-2. Cell specific test parameters for NR Cell 1, E-UTRAN PCell Cell 2 and NR PSCell Cell 3 are provided in Tables A.6.3.1.14.1-3, A.6.3.1.14.1-4 and A.6.3.1.14.1-5 respectively.

Table A.6.3.1.14.1-1: Supported test configurations for SA inter-RAT E-UTRAN handover with FR1 PSCell addition tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.1.14.1-2: General test parameters for SA inter-RAT E-UTRAN handover with FR1 PSCell addition

Parameter	Unit	Value	Comment
-----------	------	-------	---------

NR RF Channel Number			1, 3	2 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2, 3	E-UTRAN cell and NR cell in FR1
Final condition	Active Pcell		Cell 2	E-UTRAN cell
	Active PSCell		Cell 3	NR cell in FR1
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
Event B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-93	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	S	0	
Event B2	Threshold1	dBm	As specified in Table A.6.3.1.4-3	Absolute NR SS-RSRP threshold for event B2
	Threshold2EUTRAN	dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
	Hysteresis	dB	0	
	TimeToTrigger	s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cell 1 and cell 2			3 ms	Asynchronous cells
Measurement Gap pattern ID			0	As specified in Table 9.1.2-1
T1	s		1	During this time only Cell 1 is known to UE.
T2	s		≤5	During this time the UE shall identify Cell 2 and report event B2, and identify Cell 3 and report event B1.
T3	s		1	During this time the UE handovers to Cell 2.
T3'	s		0.5	During this time the UE adds the PSCell (Cell 3).
T4'	s		0.5	During this time the UE sends CSI reports for PSCell (Cell 3).

Table A.6.3.1.14.1-3: Cell specific test parameters for SA inter-RAT E-UTRA handover with FR1 PSCell addition (NR Cell 1)

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	1		
Duplex mode		1, 4	FDD		
		2, 3, 5, 6	TDD		
TDD Configuration		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
BW _{channel}	MHz	1, 4	10: N _{RB,c} = 52 (FDD)		
		2, 5	10: N _{RB,c} = 52 (TDD)		
		3, 6	40: N _{RB,c} = 106 (TDD)		
PDSCH reference measurement channel		1, 4	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
CORSET reference channel		1, 4	CR.1.1 FDD		

			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
TRS configuration			1, 4	TRS.1.1 FDD		
			2, 5	TRS.1.1 TDD		
			3, 6	TRS.1.2 TDD		
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6	OP.1		
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration			1, 2, 4, 5	SSB.1 FR1		
			3, 6	SSB.2 FR1		
b2-Threshold1		dBm	1, 2, 4, 5	-96		
			3, 6	-93		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc} ^{Note2}	dBm/15 KHz					
N_{oc} ^{Note2}	dBm/SCS	1, 2, 4, 5	-100	-104	-100	
		3, 6	-97	-101	-97	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	12	0	-4	
$\hat{E}_s/I_{ot}$ ^{Note3}	dB	1, 2, 3, 4, 5, 6	12	0	-4	
SS-RSRP ^{Note3}	dBm/SCS	1, 2, 4, 5	-88	-104	-104	
		3, 6	-85	-101	-101	
I_o ^{Note3}	dBm/9.36 MHz	1, 2, 4, 5	-59.78	-73.04	-70.59	
	dBm/38.16 MHz	3, 6	-53.68	-66.9448	-64.49	
Propagation condition			1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6	1x2 Low		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

Table A.6.3.1.14.1-4: Cell specific test parameters for SA inter-RAT E-UTRA handover with FR1 PSCell addition (E-UTRA Cell 2)

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3

RF channel number		1, 2, 3, 4, 5, 6	2		
Duplex mode		1, 2, 3	FDD		
		4, 5, 6	TDD		
TDD special subframe configuration ^{Note1}		4, 5, 6	6		
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1		
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100		
PRACH Configuration ^{Note2}		1, 2, 3	4		
		4, 5, 6	53		
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns ^{Note3}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note4}					
OCNG_RB ^{Note4}					
N _{oc} ^{Note5}					
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	8	78
$\hat{E}_s/I_{ot}$ ^{Note6}	dB	1, 2, 3, 4, 5, 6	-Infinity	78	78
RSRP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-90	-90
SCH_RP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-90	-90
I ₀ ^{Note6}	dBm/9MHz	1, 2, 3, 4, 5, 6	-67.21 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix ^{Note7}		1, 2, 3, 4, 5, 6	1x2 Low		
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].					
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].					

- Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
- Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
- Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.6.3.1.14.1-5: Cell specific test parameters for SA inter-RAT E-UTRA handover with FR1 PSCell addition (NR Cell 3)

Parameter	Unit	Config	Test			
			T1	T2	T3'	T4'
E-UTRA RF Channel Number		1,2,3,4,5,6	1			
NR RF Channel Number		1,2,3,4,5,6	2			
TDD configuration		1,4	Not Applicable			
		2,5	TDDConf.1.1			
		3,6	TDDConf.2.1			
BW _{channel}	MHz	1,4	10: N _{RB,c} = 52			
		2,5	10: N _{RB,c} = 52			
		3,6	40: N _{RB,c} = 106			
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1			
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1			
PDSCH Reference measurement channel		1,4	SR.1.1 FDD			
		2,5	SR.1.1 TDD			
		3,6	SR.2.1 TDD			
RMSI CORESET Reference Channel		1,4	CR.1.1 FDD			
		2,5	CR.1.1 TDD			
		3,6	CR.2.1 TDD			
Dedicated CORESET Reference Channel		1,4	CCR.1.1 FDD			
		2,5	CCR.1.1 TDD			
		3,6	CCR.2.1 TDD			
OCNG Patterns		1,2,3,4,5,6	OP.1			
SSB configuration		1,2,4,5	SSB.1 FR1			
		3,6	SSB.2 FR1			
SMTC configuration		1,2,4,5	SMTC.1			
		3,6	SMTC.1			
TRS Configuration		1,4	TRS.1.1 FDD			
		2,5	TRS.1.1 TDD			
		3,6	TRS.1.2 TDD			
PRACH configuration on cell2		FR1 PRACH configuration 1	Captured in A.3.8.2.1			
CSI-RS configuration for CSI reporting		1,4	CSI-RS.1.1 FDD			
		2,5	CSI-RS.1.1 TDD			
		3,6	CSI-RS.2.1 TDD			
reportConfigType		1,2,3,4,5,6	periodic			
reportQuantity		1,2,3,4,5,6	cri-RI-PMI-CQI			
CSI reporting periodicity	slot	1,2,4,5	5			
		3,6	10			
CSI reporting offset	slot	1,2,4,5	2			
		3,6	4			
EPRE ratio of PSS to SSS						

EPRE ratio of PBCH DMRS to SSS	dB	1,2,3,4,5,6	0	
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc}^{Note2}	dBm/15 kHz	1,2,3,4,5,6	N/A	-85
N_{oc}^{Note2}	dBm/SCS	1,2,4,5	N/A	-85
		3,6	N/A	-82
$\hat{E}_s/I_{ot}$		1,2,3,4,5,6	-infinity	0
$\hat{E}_s/N_{oc}$		1,2,3,4,5,6	-infinity	0
SS-RSRP ^{Note3}	dBm/SCS	1,2,4,5	-infinity	-85
		3,6	-infinity	-82
I_o^{Note3}	dBm/9.36MHz	1,2,4,5	N/A	-57
	dBm/38.1MHz	3,6	N/A	-51
Propagation condition		1,2,3,4,5,6	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

A.6.3.1.14.2 Test Requirements

In this test, the UE shall start to transmit the PRACH to E-UTRA Cell 2 less than 85 ms^{Note1} from the beginning of time period T3.

The UE shall transmit the PRACH to PSCell no later than 117 ms^{Note2} from the start of T3'. The UE shall send at least one CSI report for PSCell with non-zero CQI index during T4'. The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T4'.

The above test requirements shall be fulfilled in order of T1, T2, T3 for the observed inter-RAT handover delay from NR to E-UTRAN to be counted as correct, and in order of T1, T2, T3', T4' for the observed PSCell addition delay to be counted as correct.

The rate of correct handovers and correct PSCell addition delay during repeated tests shall be at least 90%.

NOTE1: The handover delay can be expressed as specified in clause 6.1.5.2:

$$D_{HOwithPSCell_PCell} = \text{RRC procedure delay} + T_{interrupt},$$

Where RRC procedure delay = 50 ms, $T_{\text{interrupt}} = T_{\text{search_HO}} + T_{\text{IU}} + T_{\text{processing}}$ is defined in clause 6.1.5.2.1, where

$$T_{\text{search}} = 0 \text{ ms}$$

$$T_{\text{IU}} = 10 \text{ ms},$$

$$T_{\text{processing}} = 25 \text{ ms}$$

Note2: The PSCell addition delay can be expressed as follows as specified in clause 6.1.5.2.2:

$$D_{\text{HOwithPSCell_PSCell}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search_HO}} + T_{\text{search_PSCell}} + T_{\Delta} + T_{\text{PSCell_DU}} + 2 \text{ ms}$$

Where:

$$T_{\text{RRC_delay}} = 50 \text{ ms}$$

$$T_{\text{processing}} = 25 \text{ ms}$$

$$T_{\text{search_HO}} = 0$$

$$T_{\text{search_PSCell}} = 0$$

$$T_{\Delta} = 20 \text{ ms}$$

$$T_{\text{PSCell_DU}} = 1 \cdot 10 + 10 = 20 \text{ ms}$$

A.6.3.2 RRC Connection Mobility Control

A.6.3.2.1 SA: RRC Re-establishment

A.6.3.2.1.1 Intra-frequency RRC Re-establishment in FR1

A.6.3.2.1.1.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 with known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.6.3.2.1.1.1-1, table A.6.3.2.1.1.1-2 and table A.6.3.2.1.1.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.6.3.2.1.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.3.2.1.1.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1

	Neighbour cells		1, 2, 3	Cell2	
Final condition	Active cell		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
N310	-		1, 2, 3	1	Maximum consecutive out-of-sync indications from lower layers
N311	-		1, 2, 3	1	Minimum consecutive in-sync indications from lower layers
T310	ms		1, 2, 3	0	Radio link failure timer;
T311	ms		1, 2, 3	3000	RRC re-establishment timer
Access Barring Information	-		1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length	s		1, 2, 3	OFF	
PRACH configuration			1, 2, 3	FR1 PRACH configuration on 1	Table A.3.8.2.1-1
T1	s		1, 2, 3	5	
T2	ms		1, 2, 3	240	Time for the UE to detect RLF (Summation of $T_{\text{Evaluate_out_SSB}}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3	s		1, 2, 3	2	

Table A.6.3.2.1.1.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		

Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		1, 2, 3	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBW P.1.1
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBW P.1.1
RLM-RS		1, 2, 3	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1	1.54	-infinity	-infinity	-3.79	4	4
		2						
		3						
N_{oc} ^{Note2}	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} ^{Note2}	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s/N_{oc}$	dB	1	7	-infinity	-infinity	4	4	4
		2						
		3						
SS-RSRP ^{Note3}	dBm/SCS	1	-91	-infinity	-infinity	-94	-94	-94
		2	-91	-infinity	-infinity	-94	-94	-94
		3	-88	-infinity	-infinity	-91	-91	-91
Io	dBm/9.36 MHz	1	-60.74	-64.59	-64.59	-60.74	-64.59	-64.59
	dBm/9.36 MHz	2	-60.74	-64.59	-64.59	-60.74	-64.59	-64.59
	dBm/38.16 MHz	3	-54.65	-58.50	-58.50	-54.65	-58.50	-58.50
Propagation Condition		1, 2, 3	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers							
	and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.6.3.2.1.1.2 Test Requirements

The RRC re-establishment delay is defined as the time from the moment UE declares RLF, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to a known NR intra frequency cell shall be less than 1.6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$$N_{freq} = 1$$

$$T_{identify_intra_NR} = 200 \text{ ms}$$

$T_{SI} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

$T_{PRACH} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 1545 ms for RRC re-establishment delay, allow 1840 ms (240 ms + 1.6 s) from the beginning of T2 in the test case.

A.6.3.2.1.2 Inter-frequency RRC Re-establishment in FR1

A.6.3.2.1.2.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR1 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.6.3.2.1.2.1-1, table A.6.3.2.1.2.1-2 and table A.6.3.2.1.2.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.6.3.2.1.2.1-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.6.3.2.1.2.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	
Final condition	Active cell		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
N310		-	1, 2, 3	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3	1	Minimum consecutive in-sync indications from lower layers

T310	ms	1, 2, 3	0	Radio link failure timer;
T311	ms	1, 2, 3	5000	RRC re-establishment timer
Access Barring Information	-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
DRX cycle length	s	1, 2, 3	OFF	Table A.3.8.2.1-1
PRACH configuration		1, 2, 3	FR1 PRACH configuration 1	
T1	s	1, 2, 3	5	Time for the UE to detect RLF (Summation of $T_{\text{Evaluate_out_SSB}}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T2	ms	1, 2, 3	240	
T3	s	1, 2, 3	5	

Table A.6.3.2.1.2.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
RF Channel Number		1, 2, 3	1			2		
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
Active DL BWP configuration		1, 2, 3	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBW P.1.1
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBW P.1.1
RLM-RS		1, 2, 3	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	7

		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	7
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-94	-infinity	-infinity	-infinity	-infinity	-91
		2	-94	-infinity	-infinity	-infinity	-infinity	-91
		3	-91	-infinity	-infinity	-infinity	-infinity	-88
Io	dBm/9.36 MHz	1	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26
	dBm/9.36 MHz	2	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26
	dBm/38.16 MHz	3	-58.50	-63.94	-63.94	-63.94	-63.94	-56.15
Propagation Condition		1, 2, 3	AWGN					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								

A.6.3.2.1.2.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 3 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 2$$

$$T_{\text{identify_intra_NR}} = 800 \text{ ms}$$

$$T_{\text{identify_inter_NR}} = 800 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 2945 ms, allow 3 s in the test case.

A.6.3.2.1.3 Intra-frequency RRC Re-establishment in FR1 without serving cell timing

A.6.3.2.1.3.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.6.3.2.1.3.1-1, table A.6.3.2.1.3.1-2 and table A.6.3.2.1.3.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.6.3.2.1.3.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.3.2.1.3.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	
Final condition	Active cell		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
N310		-	1, 2, 3	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3	6000	Radio link failure timer configured by <i>RLF-TimersAndConstants</i>
T311		ms	1, 2, 3	3000	RRC re-establishment timer
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.2 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3	OFF	
PRACH configuration			1, 2, 3	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1		s	1, 2, 3	5	

T2	s	1, 2, 3	6.24	Time for the UE to detect RLF (Summation of $T_{\text{Evaluate_out_SSB}}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3	s	1, 2, 3	3	

Table A.6.3.2.1.3.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
TRS Configuration		1	TRS.1.1 FDD			TRS.1.1.FDD		
		2	TRS.1.1 TDD			TRS.1.1.TDD		
		3	TRS.1.2 TDD			TRS.1.2.TDD		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	4
		2						
		3						
N_{oc} ^{Note2}	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} ^{Note2}	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s/N_{oc}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	4
		2						
		3						
SS-RSRP ^{Note3}	dBm/SCS	1	-94	-infinity	-infinity	-infinity	-infinity	-94
		2	-94	-infinity	-infinity	-infinity	-infinity	-94
		3	-91	-infinity	-infinity	-infinity	-infinity	-91
Io	dBm/9.36 MHz	1	-64.59	-infinity	-infinity	-infinity	-infinity	-64.59
	dBm/9.36 MHz	2	-64.59	-infinity	-infinity	-infinity	-infinity	-64.59
	dBm/38.16 MHz	3	-58.50	-infinity	-infinity	-infinity	-infinity	-58.50
Propagation Condition		1, 2, 3	AWGN					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.2.1.3.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 2.2 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 1$$

$$T_{\text{identify_intra_NR}} = 800 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 [2] for the target intra-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 2145 ms, allow 2.2 s in the test case.

A.6.3.2.2 Random Access

A.6.3.2.2.1 4-step RA type contention based random access test in FR1 for NR standalone

A.6.3.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.6.3.2.2.1.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.6.3.2.2.1.1-2.

Table A.6.3.2.2.1.1-1: Supported test configurations for contention based random access test in FR1 for NR standalone

Config	Description
--------	-------------

1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.6.3.2.2.1.1-2: General test parameters for contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB pattern 1 in FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB pattern 2 in FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3.10
SS/PBCH block index			0,1	Different from the definition in A.3.10
Duplex Mode for Cell 1	Config 1		FDD	
	Config 2		TDD	
TDD Configuration	Config 2		TDDConf.2.1	
CSI-RS for tracking	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.2 TDD	
OCNG Pattern ^{Note 1}			OP.1	As defined in A.3.2.1.
PDSCH parameters ^{Note 4}	Config 1		SR.1.1 FDD	As defined in A.3.1.1.
	Config 2		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	
	Config 2		CCR.2.1 TDD	
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1	dBm/15kHz	
		Config 2	-98	
	$\hat{E}_s / N_{oc}$		dB	
	SS-RSRP ^{Note 3}		dBm/ SCS	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1	dBm/15kHz	
		Config 2	-98	
			-101	

	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP ^{Note 3}		dBm/ SCS	-115	
I _o ^{Note 2}	Config 1		dBm	-65.3/9.36MHz	For symbols without SSB index 1
	Config 2			-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX, f, c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 1	As defined in A.3.8.
Propagation Condition			-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: SS-RSRP, Es/I_o and I_o levels have been derived from other parameters for information purpose. They are not settable parameters. Note 3: Void Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.					

A.6.3.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.6.3.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.6.3.2.2.1.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A. 6.3.2.2.1.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.6.3.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.6.3.2.2.2 4-step RA type non-contention based random access test in FR1 for NR standalone

A.6.3.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.6.3.2.2.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.6.3.2.2.1-2 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.6.3.2.2.1-1: Supported test configurations for non-contention based random access test in FR1 for NR standalone

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table A.6.3.2.2.1-2: General test parameters for non-contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1		SSB pattern 1 in FR1	SSB pattern 1 in FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB pattern 2 in FR1	SSB pattern 2 in FR1	
Number of SSBs per SS-burst			2	2	Different from the definition in A.3.10
SS/PBCH block index			0,1	0,1	Different from the definition in A.3.10
CSI-RS Configuration	Config 1		N/A	CSI-RS.1.1 FDD	As defined in A.3.1.4
	Config 2			CSI-RS.2.1 TDD	
Duplex Mode for Cell 1	Config 1		FDD	FDD	
	Config 2		TDD	TDD	
TDD Configuration	Config 2		TDDConf.2.1	TDDConf.2.1	
CSI-RS for tracking	Config 1		TRS.1.1 FDD	TRS.1.1 FDD	
	Config 2		TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Pattern ^{Note 1}			OP.1	OP.1	As defined in A.3.2.1.
PDSCH parameters ^{Note 4}	Config 1		SR.1.1 FDD	SR.1.1 FDD	As defined in A.3.1.1.
	Config 2		SR.2.1 TDD	SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 TDD	CR.1.1 TDD	
	Config 2		CR.2.1 TDD	CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 TDD	CCR.1.1 TDD	
	Config 2		CCR.2.1 TDD	CCR.2.1 TDD	
NR RF Channel Number			1	1	
EPRE ratio of PSS to SSS		dB	0	0	

EPRE ratio of PBCH_DMRS to SSS			dB			
EPRE ratio of PBCH to PBCH_DMRS			dB			
EPRE ratio of PDCCH_DMRS to SSS			dB			
EPRE ratio of PDCCH to PDCCH_DMRS			dB			
EPRE ratio of PDSCH_DMRS to SSS			dB			
EPRE ratio of PDSCH to PDSCH_DMRS			dB			
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	3	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1	dBm/15kHz	-98	-98	
		Config 2		-101	-101	
	$\hat{E}_s / N_{oc}$		dB	3	3	
	SS-RSRP ^{Note 3}		dBm/ SCS	-95	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	-17	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1	dBm/15kHz	-98	-98	
		Config 2		-101	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	-17	
	SS-RSRP ^{Note 3}		dBm/ SCS	-115	-115	
I_o ^{Note 2}		Config 1	dBm	-65.3/9.36MHz	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-62.2/38.16MHz	-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{\text{C} \text{MAX}, \text{f}, \text{c}}$)			dBm	23	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 2	FR1 PRACH configuration 3	As defined in A.3.8.2.
Propagation Condition			-	AWGN	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.						
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.						
Note 3: Void						
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.						

A.6.3.2.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.6.3.2.2.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.2.1 for SSB-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-2, to test the UE behavior specified in Clause 6.2.2.2.1 for CSI-RS-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.3 2-step RA type contention based random access test in FR1 for NR standalone

A.6.3.2.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the 2-step RA type random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.3 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.6.3.2.2.3.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.6.3.2.2.3.1-2.

Table A.6.3.2.2.3.1-1: Supported test configurations for 2-step RA type contention based random access with successRAR test in FR1 for NR standalone

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table A.6.3.2.2.3.1-2: General test parameters for 2-step RA type contention based random access with successRAR test in FR1 for NR standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB pattern 1 in FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB pattern 2 in FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3.10
SS/PBCH block index			0,1	Different from the definition in A.3.10
Duplex Mode for Cell 2	Config 1		FDD	
	Config 2		TDD	
TDD Configuration	Config 2		TDDConf.2.1	
OCNG Pattern ^{Note 1}			OP.1	As defined in A.3.2.1.
PDSCH parameters ^{Note 3}	Config 1		SR.1.1 FDD	As defined in A.3.1.1.
	Config 2		SR.2.1 TDD	
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		

EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured <i>msgA-RSRP-ThresholdSSB</i>
	N_{oc}	Config 1	dBm/15kHz	-98	
		Config 2		-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured <i>msgA-RSRP-ThresholdSSB</i>
	N_{oc}	Config 1	dBm/15kHz	-98	
		Config 2		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
I ₀ Note 2		Config 1	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-62.2/38.16MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{C_{MAX, f, c}}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 1	As defined in A.3.20.2.1.
<i>msgA-RSRP-ThresholdSSB</i>			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Propagation Condition			-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.					
Note 2: SS-RSRP, Es/Iot and I0 levels have been derived from other parameters for information purpose. They are not settable parameters.					
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.					

A.6.3.2.2.3.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.6.3.2.2.3.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.1.1 the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB*.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA preamble transmission shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be 3dB lower than the first MsgA PRACH power for test configuration 1 and equal to the first MsgA PRACH power for test configuration 2 & 3 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.3.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.1.2 the System Simulator shall transmit a MsgB containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit an ACK if the MsgB with a successRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble and if the Contention Resolution is successful.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB(s) contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be 3dB lower than the first MsgA PRACH power for test configuration 1 and equal to the first MsgA PRACH power for test configuration 2 & 3 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.3.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.1.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be 3dB lower than the first MsgA PRACH power for test configuration 1 and equal to the first MsgA PRACH power for test configuration 2 & 3 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.4 2-step RA type non-contention based test in FR1 for NR standalone

A.6.3.2.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.3 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.6.3.2.2.4.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.6.3.2.2.4.1-2.

Table A.6.3.2.4.1-1: Supported test configurations for non-contention based random access test in FR1 for NR standalone

Config	Description
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table A.6.3.2.4.1-2: General test parameters for non-contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB pattern 2 in FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
Number of SSBs per SS-burst			2	Different from the definition in A.3.10
SS/PBCH block index			0,1	Different from the definition in A.3.10
Duplex Mode for Cell 1	Config 1		TDD	
TDD Configuration	Config 1		TDDConf.2.1	
OCNG Pattern ^{Note 1}			OP.1	As defined in A.3.2.1.
PDSCH parameters ^{Note 4}	Config 1		SR.2.1 TDD	As defined in A.3.1.1.
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
msgA-RSRP-ThresholdSSB		dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
SSB with index 0	$\hat{E}_s / I_{ot}$	dB	3	Power of SSB with index 0 is set to be above configured msgA-RSRP-ThresholdSSB
	N_{oc}	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$	dB	3	
	SS-RSRP ^{Note 3}	dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$	dB	-17	Power of SSB with index 1 is set to be below configured msgA-RSRP-ThresholdSSB
	N_{oc}	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$	dB	-17	
	SS-RSRP ^{Note 3}	dBm/ SCS	-115	
I_0 ^{Note 2}	Config 1	dBm	-62.2/38.16MHz	For symbols without SSB index 1

ss-PBCH-BlockPower	dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{\text{CMAX}, f, c}$)	dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration		FR1 MsgA configuration 2	As defined in A.3.20.2.2.
Propagation Condition	-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: SS-RSRP, Es/lot and Io levels have been derived from other parameters for information purpose. They are not settable parameters. Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.			

A.6.3.2.2.4.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.6.3.2.2.4.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.2.1, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA PRACH on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA PRACH power with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.4.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.2.2 the System Simulator shall transmit a MsgB containing a fallbackRAR containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 containing the payload of MsgA PUSCH if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble. The UE shall monitor contention resolution as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA PRACH power with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA and msg3 transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.2.4.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.2.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA PRACH power with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.6.3.2.3 SA: RRC Connection Release with Redirection

A.6.3.2.3.1 Redirection from NR in FR1 to NR in FR1

A.6.3.2.3.1.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to NR requirements specified in clause 6.2.3.2.1.

A.6.3.2.3.1.2 Test Parameters

Supported test configurations are shown in table A.6.3.2.3.1.2-1. The time delay is tested by using the parameters in table A.6.3.2.3.1.2-2, and A.6.3.2.3.1.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2. Cell 1 and Cell 2 belong to different tracking areas.

Table A.6.3.2.3.1.2-1: Redirection from NR to NR test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.2.3.1.2-2: General test parameters for Redirection from NR to NR test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μ s	Synchronous cells
T1		s	5	
T2		s	2.3	

Table A.6.3.2.3.1.2-3: Cell specific test parameters for Redirection from NR to NR test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
SSB Configuration	Config 1		SSB.1 FR1			
	Config 2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
CSI-RS for tracking	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
BWP BW	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
OCNG Patterns			OCNG pattern 1			
SMTc configuration	Config 1,2		SMTc.1 FR1			
	Config 3		SMTc.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			

		Dedicated UL BWP	ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}		dBm/15kHz	-98			
N_{oc} ^{Note2}	Config 1,2	dBm/SCS	-98			
	Config 3					
$\hat{E}_s / I_{ot}$		dB	4	4	-infinity	4
$\hat{E}_s / N_{oc}$		dB	4	4	-infinity	4
I_o ^{Note3}	Config 1,2	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-64.59
	Config 3	dBm/ 38.16MHz	-58.49	-58.49	-63.94	-58.49
Propagation condition		-	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.3.2.3.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2240 ms from the beginning of time period T2.
The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{\text{connection_release_redirect_NR}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-NR}} + T_{\text{SI-NR}} + T_{\text{RACH}},$$

where:

$T_{\text{RRC_procedure_delay}} = 110$ ms in the test.

$T_{\text{identify-NR}} = 680$ ms in the test.

$T_{\text{SI-NR}} = 1280$ ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

$T_{\text{RACH}} = 170$ ms in the test.

This gives a total of 2240 ms.

A.6.3.2.3.2 Redirection from NR in FR1 to E-UTRAN

A.6.3.2.3.2.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to E-UTRAN requirements specified in clause 6.2.3.2.2.

A.6.3.2.3.2.2 Test Parameters

Supported test configurations are shown in table A.6.3.2.3.2.2-1. The time delay is tested by using the parameters in table A.6.3.2.3.2.2-2, A.6.3.2.3.2.2-3 and A.6.3.2.3.2.2-4.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.6.3.2.3.2.2-1: Redirection from NR to E-UTRAN test configurations

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.2.3.2.2-2: General test parameters for Redirection from NR to E-UTRAN test case

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	2.3	

Table A.6.3.2.3.2.2-3: Cell specific test parameters for Redirection from NR to E-UTRAN (cell 1)

Parameter		Unit	Cell 1	
			T1	T2
RF Channel Number			1	
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
SSB Configuration	Config 1,4		SSB.1 FR1	
	Config 2,5		SSB.1 FR1	
	Config 3,6		SSB.2 FR1	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	
	Config 2,5		TRS.1.1 TDD	
	Config 3,6		TRS.1.2 TDD	
TDD configuration	Config 1,4		Not Applicable	
	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52	

	Config 2,5		10: $N_{RB,c} = 52$	
	Config 3,6		40: $N_{RB,c} = 106$	
BWP BW	Config 1,4	MHz	10: $N_{RB,c} = 52$	
	Config 2,5		10: $N_{RB,c} = 52$	
	Config 3,6		40: $N_{RB,c} = 106$	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD	
CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR2.1 TDD	
OCNG Patterns			OCNG pattern 1	
SMTC configuration	Config 1,2,4,5		SMTC.1 FR1	
	Config 3,6		SMTC.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	
	Config 3,6		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	
	Config 3,6		30 kHz	
PRACH configuration			FR1 PRACH configuration 1	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note2}		dBm/15kHz	-98	
N_{oc} ^{Note2}	Config 1,2,4,5	dBm/SCS	-98	
	Config 3,6		-95	
$\hat{E}_s/I_{ot}$		dB	4	4
$\hat{E}_s/N_{oc}$		dB	4	4
I_0 ^{Note3}	Config 1,2,4,5	dBm/9.36MHz	-64.59	-64.59
	Config 3,6	dBm/38.16MHz	-58.49	-58.49
Propagation condition		-	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Table A.6.3.2.3.2.2-4: Cell specific test parameters for Redirection from NR to E-UTRAN (cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	2	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PRACH Configuration ^{Note2}		1, 2, 3	4	
		4, 5, 6	53	
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note3}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note4}				
OCNG_RB ^{Note4}				
N _{oc} ^{Note5}				
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	4
$\hat{E}_s/I_{ot}$ ^{Note6}	dB	1, 2, 3, 4, 5, 6	-Infinity	4
RSRP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-94
SCH_RP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-94
I ₀ ^{Note6}	dBm/9MHz	1, 2, 3, 4, 5, 6	-70.22	-64.76
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].				
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				

Note 4:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 7:	Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

A.6.3.2.3.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2205 ms from the beginning of time period T2. The rate of correct RRC connection release redirection to E-UTRAN observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{\text{connection_release_redirect_E-UTRA}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-E-UTRA}} + T_{\text{SI-E-UTRA}} + T_{\text{RACH}},$$

where:

$T_{\text{RRC_procedure_delay}} = 110$ ms in the test.

$T_{\text{identify-E-UTRA}} = 800$ ms in the test.

$T_{\text{SI-E-UTRA}} = 1280$ ms, it is the time required for receiving all the relevant system information as defined in TS 36.331 for the target E-UTRA cell.

$T_{\text{RACH}} = 15$ ms in the test.

This gives a total of 2205 ms.

A.6.3.3 Conditional handover

A.6.3.3.1 Intra-frequency conditional handover from FR1 to FR1

A.6.3.3.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency conditional handover requirements specified in clause 6.1.4.2.

A.6.3.3.1.2 Test Parameters

Supported test configurations are shown in table A.6.3.3.1.2-1. Both conditional handover delay and interruption length are tested by using the parameters in table A.6.3.3.1.2-2, and A.6.3.3.1.2-3.

The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

NR shall configure a condition implying handover to cell 2 during T1, at a time earlier than T_{RRC} before the beginning of T2.

Table A.6.3.3.1.2-1: Intra-frequency conditional handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

	Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations

Table A.6.3.3.1.2-2: General test parameters Intra-frequency conditional handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset in condition		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
PRACH configuration index			FR1 PRACH configuration 1	As specified in table Table 6.3.3.2-3 in TS 38.211 [6]
Time offset between cells			3 μ s	Synchronous cells
T1		s	5	
T2		s	≤ 2	

Table A.6.3.3.1.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency conditional handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
BWP BW	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OCNG pattern 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
	Config 1,2	kHz	15 kHz			

PUCCH/PUSCH subcarrier spacing		Config 3		30 kHz			
PRACH configuration				FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP			DLBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1			
	Initial UL BWP			ULBWP.0.1			
	Dedicated UL BWP			ULBWP.1.1			
EPRE ratio of PSS to SSS			dB	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}			dBm/15kHz _z	-98			
N_{oc}^{Note2}	Config 1,2		dBm/SCS	-98			
	Config 3						
$\hat{E}_s/I_{ot}$			dB	8	-3.3	-Infinity	2.36
$\hat{E}_s/N_{oc}$			dB	8	8	-Infinity	11
SSB_RP	Config 1,2		dBm/SCS	-90	-90	-Infinity	-87
	Config 3		dBm/SCS	-87	-87	-Infinity	-84
I_o^{Note3}	Config 1,2		dBm/9.36MHz	-61.41	-57.06	-61.41	-57.06
	Config 3		dBm/38.16MHz	-55.31	-50.96	-55.31	-50.96
Propagation condition			-	AWGN			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.6.3.3.1.3 Test Requirements

$T_{RRC} + T_{Event_DU}$ occurs during T1 as the handover condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{interrupt} + T_{CHO_execution} = 800 + 62 + 10 = 872ms$ from the start of T2 and the interruption during T2 shall not exceed $T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin} = 40 + 20 + 2 = 62ms$

A.6.3.3.2 Inter-frequency conditional handover from FR1 to FR1

A.6.3.3.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR conditional FR1-NR FR1 inter frequency conditional handover requirements specified in clause 6.1.4.2.

A.6.3.3.2.2 Test Parameters

Supported test configurations are shown in table A.6.3.3.2.2-1. Both conditional handover delay and interruption length are tested by using the parameters in table A.6.3.3.2.2-2, and A.6.3.3.2.2-3.

The test scenario comprises of two carriers and one cell on each carrier Gap pattern ID gp0 is configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. NR shall configure a condition implying handover to cell 2 during T1, at a time earlier than T_{RRC} before the beginning of T2. At the start of T2, cell 2 becomes detectable and meets the handover condition.

Table A.6.3.3.2.2-1: Inter-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.3.3.2.2-2: General test parameters Inter-frequency handover from FR1 to FR1

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
A3-Offset in handover condition	dB	-4	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
T1	s	5	
T2	s	≤ 2	

Table A.6.3.3.2.2-3: Cell specific test parameters for NR FR1-FR1 Inter frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52			

		Config 2		10: N _{RB,c} = 52			
		Config 3		40: N _{RB,c} = 106			
BWP BW		Config 1	MHz	10: N _{RB,c} = 52			
		Config 2		10: N _{RB,c} = 52			
		Config 3		40: N _{RB,c} = 106			
TRS configuration		Config 1		TRS.1.1 FDD			
		Config 2		TRS.1.1 TDD			
		Config 3		TRS.1.2 TDD			
DRx Cycle			ms	Not Applicable			
Gap pattern ID				gp0			
PDSCH Reference measurement channel	Config 1			SR.1.1 FDD			
	Config 2			SR.1.1 TDD			
	Config 3			SR2.1 TDD			
CORESET Reference Channel	Config 1			CR.1.1 FDD			
	Config 2			CR.1.1 TDD			
	Config 3			CR2.1 TDD			
OCNG Patterns				OCNG pattern 1			
SMTc Configuration				SMTc pattern 1			
SSB Configuration	Config 1,2			SSB.1 FR1			
	Config 3			SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2		kHz	15 kHz			
	Config 3			30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2		kHz	15 kHz			
	Config 3			30 kHz			
PRACH configuration				FR1 PRACH configuration 1			
BWP	Initial DL BWP			DLBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1			
	Initial UL BWP			ULBWP.0.1			
	Dedicated UL BWP			ULBWP.1.1			
EPRE ratio of PSS to SSS			dB	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N _{oc} ^{Note2}		dBm/15kHz	-98		-98		
N _{oc} ^{Note2}	Config 1,2		dBm/SCS	-98		-98	
	Config 3			-95		-95	
Ê _s /I _{ot}			dB	4	4	-Infinity	5
Ê _s /N _{oc}			dB	4	4	-Infinity	5
SSB _{RP}	Config 1,2		dBm/SCS	-94	-94	-Infinity	-93
	Config 3		dBm/SCS	-91	-91	-Infinity	-90
I _o ^{Note3}	Config 1,2		dBm/ 9.36MHz	-64.59	-64.59	-70.05	-63.85
	Config 3		dBm/ 38.16MHz	-58.49	-58.49	-63.94	-57.75
Propagation condition			-	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.3.3.2.3 Test Requirements

$T_{RRC} + T_{Event_DU}$ occurs during T1 as the handover condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{interrupt} + T_{CHO_execution} = 920 + 62 + 10 = 992$ ms from the start of T2 and the interruption during T2 shall not exceed $T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin} = 40 + 20 + 2 = 62$ ms excluding any transmissions which do not occur due to measurement gaps.

Inter-frequency CHO FR1-FR1 920 ($T_{measure}$)+62 ($T_{interrupt}$)+10 ($T_{CHO_execution}$) = 992 62 m

A.6.4 Timing

A.6.4.1 UE transmit timing

A.6.4.1.1 NR UE Transmit Timing Test for FR1

A.6.4.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeB and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2.

Supported test configurations are shown in Table A.6.4.1.1.1-1.

Table A.6.4.1.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

For this test a single NR cell is used. Table A.6.4.1.1.1-2 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.6.4.1.1.1-3.

Table A.6.4.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1,2,3	1	1
TDD configuration		1	Not Applicable	
		2	TDDConf.1.1	
		3	TDDConf.2.1	
BW _{channel}	MHz	1	10: $N_{RB,c} = 52$	
		2	10: $N_{RB,c} = 52$	
		3	40: $N_{RB,c} = 106$	
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1	

Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1	
DRx Cycle	ms	1,2,3	N/A	DRX.8 ^{Note5}
PDSCH Reference measurement channel		1	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET Reference Channel		1	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET Reference Channel		1	CCR.1.1 FDD	
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
OCNG Patterns		1,2,3	OP.1	
SSB configuration		1,2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC Configuration		1,2	SMTC.1	
		3	SMTC.2	
TRS configuration		1	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
EPRE ratio of PSS to SSS	dB	1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note2}	dBm/15 kHz	1,2,3	-98	-98
N_{oc} ^{Note2}	dBm/SCS	1,2	-98	-98
		3	-95	-95
$\hat{E}_s / I_{ot}$		1,2,3	3	3
$\hat{E}_s / N_{oc}$		1,2,3	3	3
SS-RSRP ^{Note3}	dBm/SCS	1,2	-95	-95
		3	-92	-92
I_0 ^{Note3}	dBm/9.36MHz	1,2	-65.2	-65.2
	dBm/38.1MHz	3	-59.2	-59.2
Propagation condition		1,2,3	AWGN	
SRS Config		1,2	SRSCnf.1 ^{Note6}	SRSCnf.3 ^{Note6}
		3	SRSCnf.1 ^{Note6}	SRSCnf.2 ^{Note6}
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	DRx related parameters are given in Table A.3.3.8-1
Note 6:	SRS configs are given in Table A.6.4.1.1.1-3

Table A.6.4.1.1.1-3: SRS Configuration for Timing Accuracy Test

	Field	SRSCConf.1	SRSCConf.2	SRSCConf.3	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	0	
	srs-ResourceIdList	0	0	0	
	resourceType	Periodic	Periodic	Periodic	
	Usage	Codebook	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	0	
	nrofSRS-Ports	Port1	Port1	Port1	
	transmissionComb	n2	n2	n2	
	combOffset-n2	0	0	0	
	cyclicShift-n2	0	0	0	
	resourceMapping startPosition	0	0	0	
	resourceMapping nrofSymbols	n1	n1	n1	
	resourceMapping repetitionFactor	n1	n1	n1	
	freqDomainPosition	0	0	0	
	freqDomainShift	0	0	0	
	freqHopping c-SRS	14 for test configuration 1,2 25 for test configuration 3	25	14	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	0	
	freqHopping b-hop	0	0	0	
	groupOrSequenceHopping	Neither	Neither	Neither	
	resourceType	Periodic	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl640, 0	sl320, 0	Offset to align with DRx periodicity
	sequenceId	0	0	0	Any 10 bit number

Table A.6.4.1.1.1-4: Void**A.6.4.1.1.2 Test requirements**

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test

- 1) Setup NR PCell according to parameters given in Table A.6.4.1.1.1-1.
- 2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.
 - a. The N_{TA} offset value (in T_c units) is 25600
 - b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1
- 3) The test system shall adjust the timing of the DL path by values given in Table A.6.4.1.1.2-1

Table A.6.4.1.1.2-1: Adjustment Value for DL Timing

SCS of SSB signals (KHz)	Adjustment Value	
	Test1	Test2
15	$+64*64T_c$	$+32*64T_c$
30	$+32*64T_c$	$+16*64T_c$

- 4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in clause 7.1.2 Table 7.1.2.1-1 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first path (in time) of DL SSB used by the UE to determine downlink timing is received from the reference cell at the UE antenna. Skip this step for test 2 with DRX configured.
- 5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first path (in time) of DL SSB used by the UE to determine downlink timing is received from the reference cell at the UE antenna. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment

A.6.4.2 UE timer accuracy

A.6.4.3 Timing advance

A.6.4.3.1 SA FR1 timing advance adjustment accuracy

A.6.4.3.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.6.4.3.1.2 Test Parameters

Supported test configurations are shown in table A.6.4.3.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.6.4.3.1.2-2, A.6.4.3.1.2-3 and A.6.4.3.1.2-4.

In all test cases, single cell is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.6.4.3.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in Clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to Clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.6.4.3.1.2-2. This value shall result in

changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3.2.1, the UE adjusts its uplink timing at slot $n+k+1$ for a timing advance command received in slot n . This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.6.4.3.1.2-1: Timing advance supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.4.3.1.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 15 kHz SCS $N_{TA_new} = N_{TA_old} + 8192 \cdot T_c$ For 30 kHz SCS $N_{TA_new} = N_{TA_old} + 4096 \cdot T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.6.4.3.1.2-3: Cell specific test parameters for timing advance

Parameter		Unit	Test1	
			T1	T2
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
BW _{channel}	Config 1	MHz	10: $N_{RB,c} = 52$	
	Config 2		10: $N_{RB,c} = 52$	
	Config 3		40: $N_{RB,c} = 106$	
BWP BW	Config 1	MHz	10: $N_{RB,c} = 52$	
	Config 2		10: $N_{RB,c} = 52$	
	Config 3		40: $N_{RB,c} = 106$	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	

	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
OCNG Patterns			OCNG pattern 1
SMTC configuration	Config 1,2		SMTC.1 FR1
	Config 3		SMTC.2 FR1
SSB configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz
	Config 3		30 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz
	Config 3		30 kHz
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc}^{Note2}		dBm/15kHz	-98
N_{oc}^{Note2}	Config 1,2	dBm/SCS	-98
	Config 3		-95
$\hat{E}_s/I_{ot}$		dB	3
$\hat{E}_s/N_{oc}$		dB	3
I_o^{Note3}	Config 1,2	dBm/9.36MHz	-67.57
	Config 3	dBm/38.16MHz	-62.58
Propagation condition		-	AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		

Table A.6.4.3.1.2-4: Sounding Reference Symbol Configuration for timing advance

Field		Value	Comment
c-SRS	Config 1,2	12	Frequency hopping is disabled
	Config 3	24	

b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=2 for SCS 15kHz sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.6.4.3.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. $k+1$ slots after the reception of the timing advance command, where $k=5$.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.6.5 Signalling characteristics

A.6.5.1 Radio link Monitoring

In the following clause, any uplink signal transmitted by the UE is used for detecting the In-/Out-of-Sync state of the UE. In terms of measurement, the uplink signal is verified on the basis of the UE output power:

For intra-band contiguous carrier aggregation, transmit OFF power is measured as the mean power per component carrier.

For UE with multiple transmit antennas, transmit OFF power is measured as the mean power at each transmit connector.

- UE output power higher than Transmit OFF power -50 dBm (as defined in TS 38.101-1 [18]) means uplink signal
- UE output power equal to or less than Transmit OFF power -50 dBm (as defined in TS 38.101-1 [18]) means no uplink signal.

A.6.5.1.1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode

A.6.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.6.5.1.1.1-1. The test parameters are given in Tables A.6.5.1.1.1-2, A.6.5.1.1.1-3, and A.6.5.1.1.1-4 below. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.6.5.1.1.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.6.5.1.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note:	The UE is only required to pass in one of the supported test configurations in FR1

Table A.6.5.1.1.1-2: General test parameters for FR1 out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52
	Config 2		10: N _{RB,c} = 52
	Config 3		40: N _{RB,c} = 106
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD

SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2		Table A.3.8.2.1-1
	Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.6.5.1.1.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1	dBm/ 15kHz z	-98		
	Config 2		-98		
	Config 3		-98		
N_{oc}	Config 1	dBm/ SCS	-98		
	Config 2		-98		
	Config 3		-95		
Propagation condition			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.					
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.					
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.6.5.1.1.1-1.					
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.					

Table A.6.5.1.1.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note: Ensure that RLM RS is partially overlapped with measurement gap	

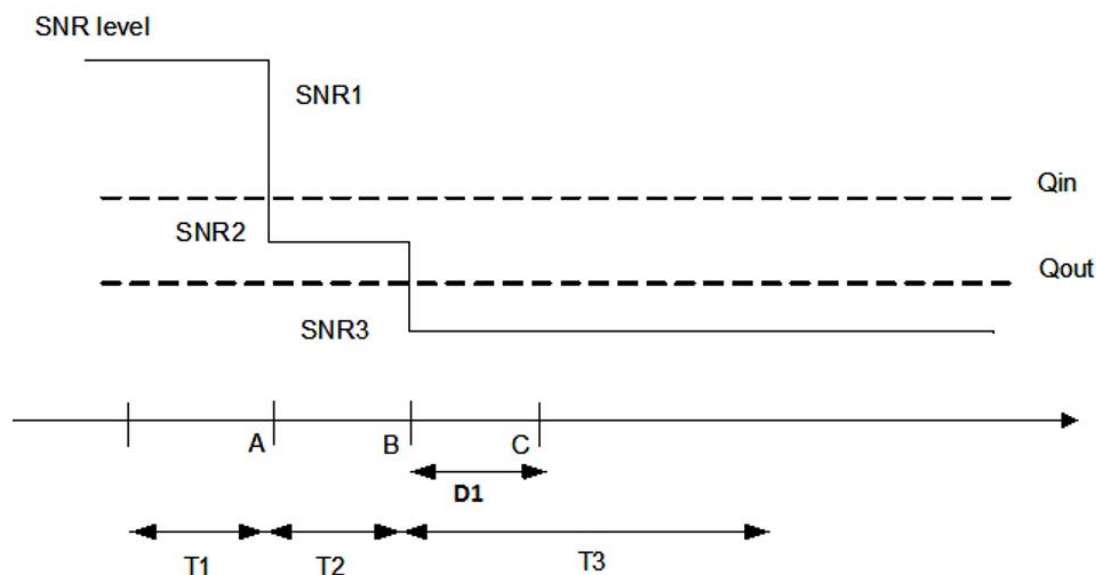


Figure A.6.5.1.1.1-1: SNR variation for out-of-sync testing

A.6.5.1.1.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.2 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode

A.6.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.6.5.1.2.1-1. The test parameters are given in Tables A.6.5.1.2.1-2, and A.6.5.1.2.1-3 below. There is one cell (Cell 1), which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.1.2.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

Table A.6.5.1.2.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.2.1-2: General test parameters for FR1 in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52
	Config 2		10: N _{RB,c} = 52
	Config 3		40: N _{RB,c} = 106
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMT-C Configuration	Config 1, 2		SMT-C.1
	Config 3		SMT-C.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2		Table A.3.8.2.1-1
	Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low

In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.6.5.1.2.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1	dBm/ 15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
N_{oc}	Config 1	dBm/ SCS	-98				
	Config 2		-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 3: SNR levels correspond to the signal to noise ratio over the SSS RES.							
Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.6.5.1.2.1-1.							
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.							

Table A.6.5.1.2.1-4: Void

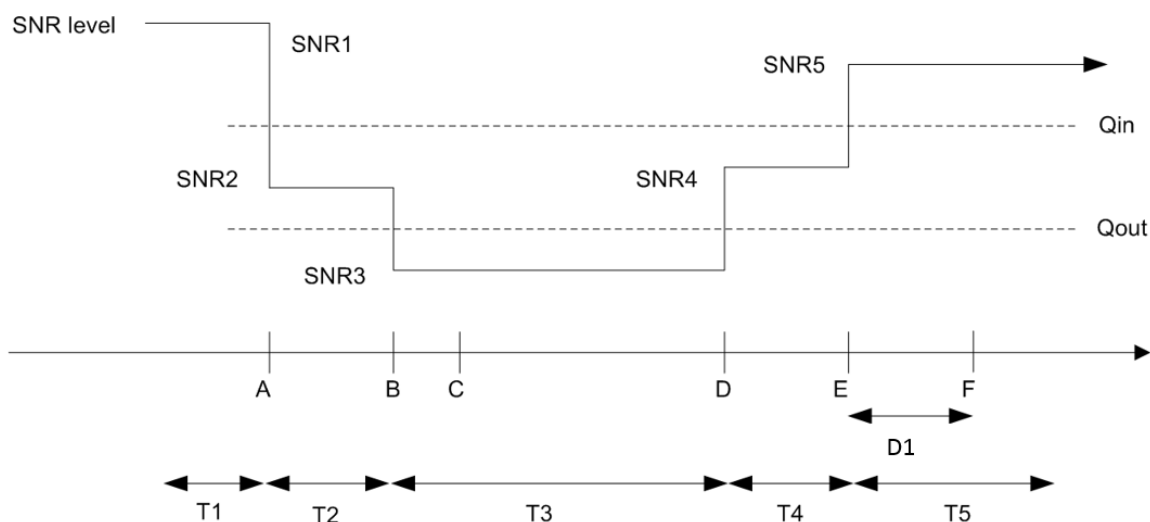


Figure A.6.5.1.2.1-1: SNR variation for in-sync testing

A.6.5.1.2.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.3 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode

A.6.5.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to *SSB#0*, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.6.5.1.3.1-1. The test parameters are given in Tables A.6.5.1.3.1-2, and A.6.5.1.3.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.6.5.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.6.5.1.3.1-1: Supported test configurations for FR1 PCell

Configuration	Description
---------------	-------------

1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.3.1-2: General test parameters for FR1 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
BW _{channel}	Config 1	MHz	10: N _{RB,C} = 52
	Config 2		10: N _{RB,C} = 52
	Config 3		40: N _{RB,C} = 106
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTTC Configuration	Config 1, 2		SMTTC.1
	Config 3		SMTTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2		Table A.3.8.2.1-1
	Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1

CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.68
T3		s	0.68
D1		s	0.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.6.5.1.3.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in DRX mode

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		
EPRE ratio of PBCH DMRS to SSS	dB	0		
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PSS to SSS	dB			
EPRE ratio of PDSCH DMRS to SSS	dB			
EPRE ratio of PDSCH to PDSCH DMRS	dB			

EPRE ratio of OCNG DMRS to SSS		dB				
EPRE ratio of OCNG to OCNG DMRS		dB				
SNR on RLM-RS	Config 1	dB	1	-7	-15	
	Config 2		1	-7	-15	
	Config 3		1	-7	-15	
N_{oc}	Config 1	dBm/15 kHz	-98			
	Config 2		-98			
	Config 3		-98			
N_{oc}	Config 1	dBm/S CS	-98			
	Config 2		-98			
	Config 3		-95			
Propagation condition			TDL-C 300ns 100Hz			
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.					
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.					
Note 4:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.6.5.1.3.1-1.					
Note 5:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.					

Table A.6.5.1.3.1-4: Void

Table A.6.5.1.3.1-5: Void

Table A.6.5.1.3.1-6: Void

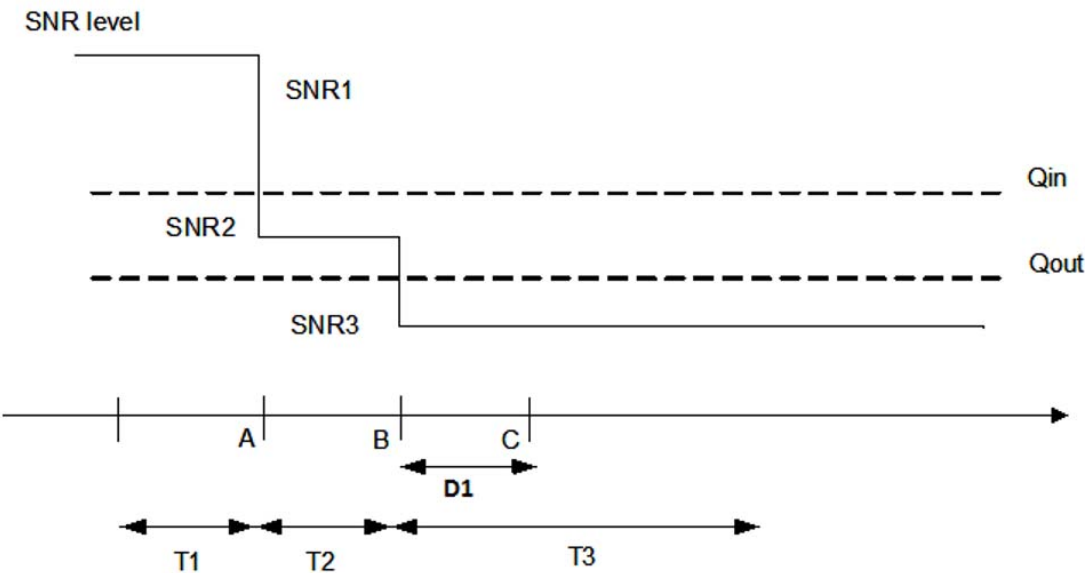


Figure A.6.5.1.3.1-1: SNR variation for out-of-sync testing

A.6.5.1.3.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.4 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode

A.6.5.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to ‘*rlf*’. Supported test configurations are shown in table A.6.5.1.4.1-1. The test parameters are given in Tables A.6.5.1.4.1-2, and A.6.5.1.4.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.1.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.6.5.1.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.4.1-2: General test parameters for FR1 in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
BW _{channel}	Config 1	MHz	10: N _{RB,C} = 52
	Config 2		10: N _{RB,C} = 52
	Config 3		40: N _{RB,C} = 106
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1

TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2		Table A.3.8.2.1-1
	Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1

CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.64
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.6.5.1.4.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1	dBm/15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
N_{oc}	Config 1	dBm/S CS	-98				
	Config 2		-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.6.5.1.4.1-1.							
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.							

Table A.6.5.1.4.1-4: Void

Table A.6.5.1.4.1-5: Void

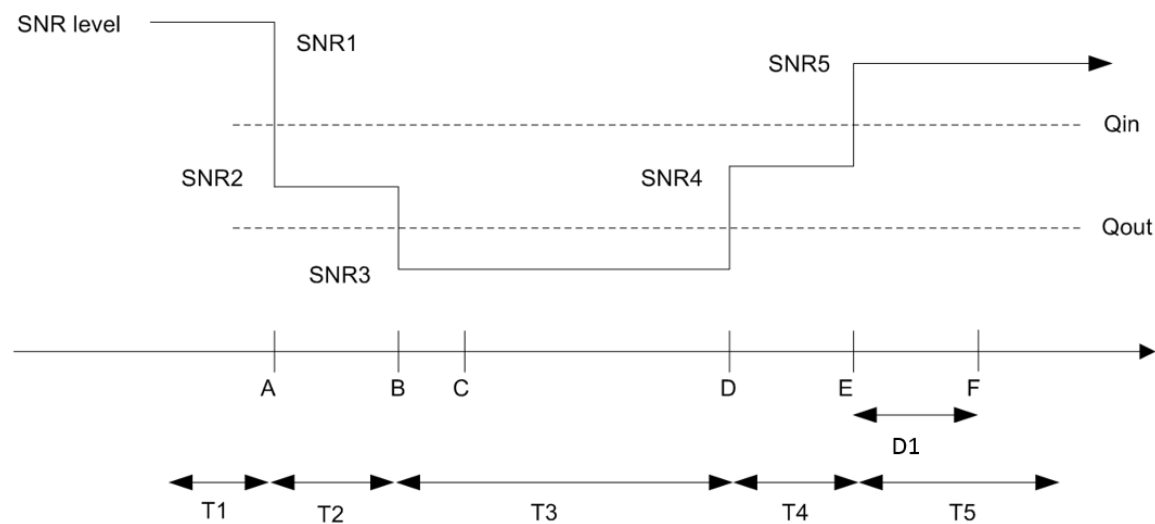


Figure A.6.5.1.4.1-1: SNR variation for in-sync testing.

A.6.5.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.5 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode

A.6.5.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.6.5.1.5.1-1, A.6.5.1.5.1-2, A.6.5.1.5.1-3, and A.6.5.1.5.1-3A below. There is one cell, cell 1 which is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.6.5.1.5.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting of 5ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS.

Table A.6.5.1.5.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.5.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTTC Configuration	Config 1, 2		SMTTC.1
	Config 3		SMTTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low

Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.6.5.1.5.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS PDCCH_DMRS_beta		dB			
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0		
EPRE ratio of PBCH to PBCH DMRS PSS_beta		dB			
EPRE ratio of PSS to SSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15

N_{oc}	Config 1	dBm/15kHz	-98
	Config 2		-98
	Config 3		-98
Propagation condition			TDL-C 300ns 100Hz
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.		
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.		
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.		
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.		
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.		
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.		
Note 8:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.6.5.1.5.1-1.		
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is [A.3.6].		

Table A.6.5.1.5.1-3A: Measurement gap configuration for FR1 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: Void	

Table A.6.5.1.5.1-4: Void

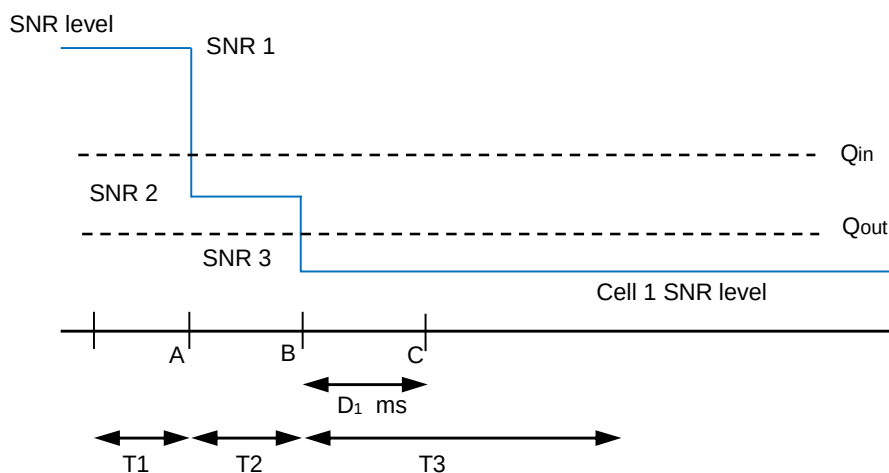


Figure A.6.5.1.5.1-1: SNR variation for CSI-RS out-of-sync testing

A.6.5.1.5.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.6 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode

A.6.5.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.6.5.1.6.1-1, A.6.5.1.6.1-2, and A.6.5.1.6.1-3 below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.1.6.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. In the test, SSB0 is configured as the BFD-RS.

Table A.6.5.1.6.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.6.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD

SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2

T2	s	0.2
T3	s	0.44
T4	s	0.2
T5	s	0.88
T6	s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.		

Table A.6.5.1.6.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0				
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB					
EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N _{oc}	Config 1	dBm/15kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.6.5.1.6.1-1.							
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.							

Table A.6.5.1.6.1-4: Void

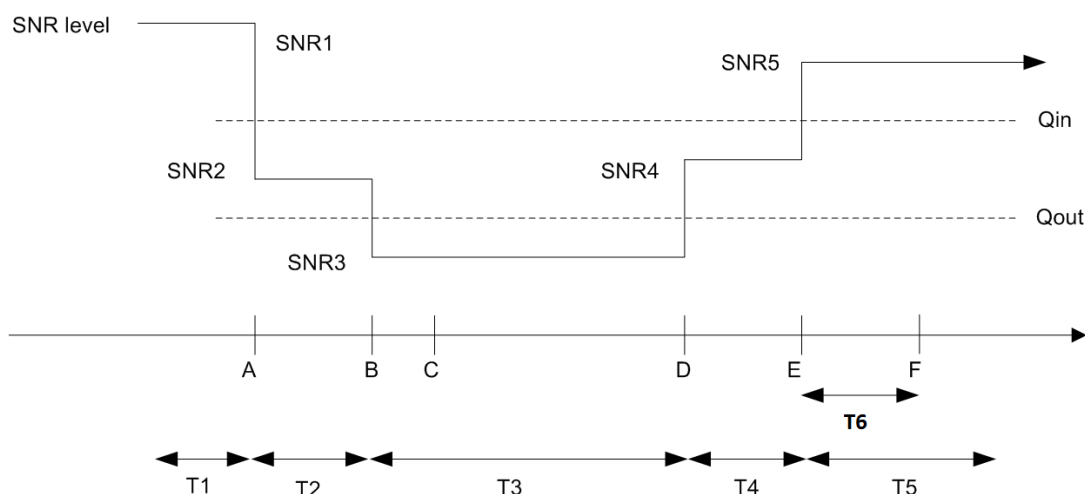


Figure A.6.5.1.6.1-1: SNR variation for CSI-RS in-sync testing

A.6.5.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.7 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode

A.6.5.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.6.5.1.7.1-1, A.6.5.1.7.1-2, and A.6.5.1.7.1-3 below. There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.6.5.1.7.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 is configured as the BFD-RS.

Table A.6.5.1.7.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.7.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTc Configuration	Config 1, 2		SMTc.1
	Config 3		SMTc.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size

	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer	ms		0
T311 timer	ms		1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1	s		0.2
T2	s		1.28
T3	s		1.28
D1	s		1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.6.5.1.7.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS_PDCCH_DMRS_beta		dB	0		
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB			
EPRE ratio of PBCH to PBCH DMRS_PSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1	dBm/15kHz	-98		
	Config 2		-98		
	Config 3		-98		
Propagation condition			TDL-C 300ns 100Hz		

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 8:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.6.5.1.7.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.

Table A.6.5.1.7.1-4: Void

Table A.6.5.1.7.1-5: Void

Table A.6.5.1.7.1-6: Void

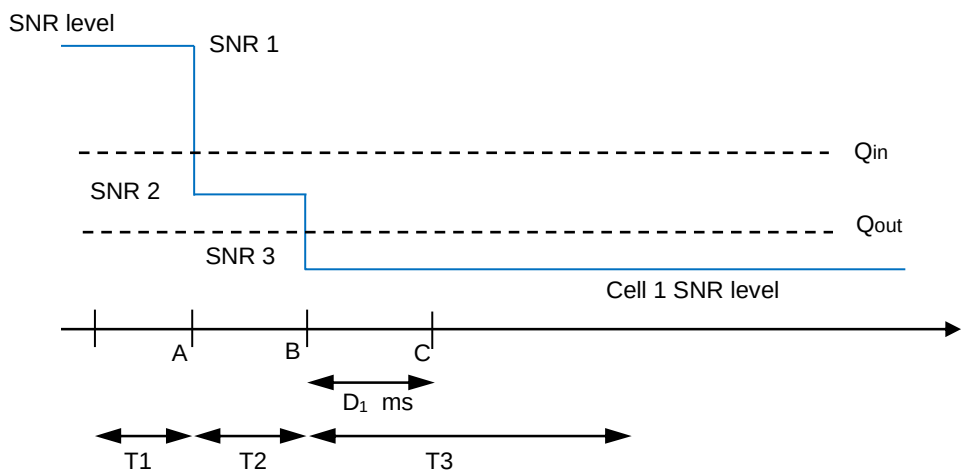


Figure A.6.5.1.7.1-1: SNR variation for CSI-RS out-of-sync testing

A.6.5.1.7.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.8 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode

A.6.5.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.6.5.1.8.1-1, A.6.5.1.8.1-2, A.6.5.1.8.1-3 and A.6.5.1.8.1-3A below. There is one cell, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.1.8.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS.

Table A.6.5.1.8.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.8.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMT-C Configuration	Config 1, 2		SMT-C.1

PDSCH/PDCCH subcarrier spacing	Config 3		SMTC.1
	Config 1, 2		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	1.24
T4		s	0.2
T5		s	4

T6	s	3.88
Note 1: UE-specific PDCCH is not transmitted after T1 starts.		

Table A.6.5.1.8.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	0				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB					
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB					
EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
Noc	Config 1	dBm/15kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.6.5.1.8.1-1.							
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.							

Table A.6.5.1.8.1-3A: Measurement gap configuration for FR1 CSI-RS in-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: Void	

Table A.6.5.1.8.1-4: Void

Table A.6.5.1.8.1-5: Void

Table A.6.5.1.8.1-6: Void

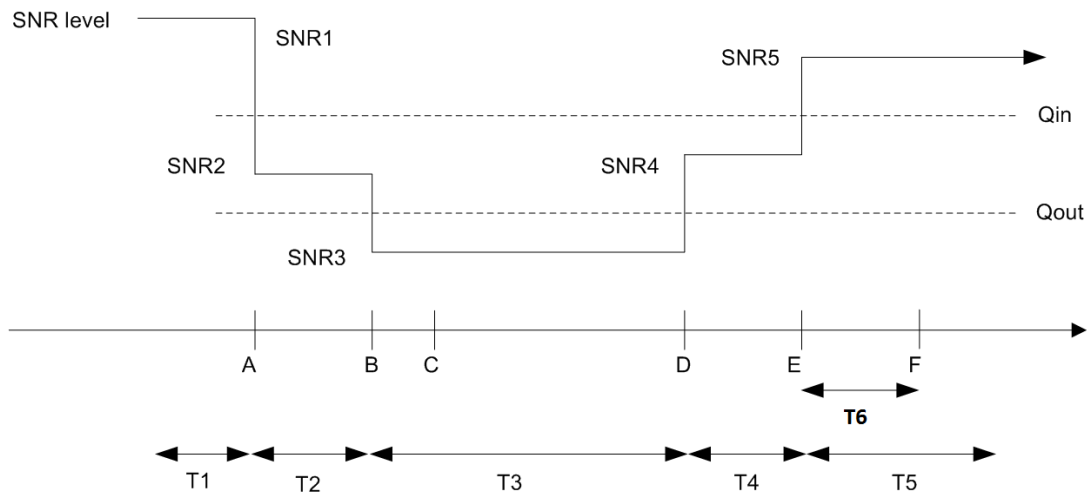


Figure A.6.5.1.8.1-1: SNR variation for CSI-RS in-sync testing

A.6.5.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.1.9 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM for UE fulfilling relaxed measurement criterion

A.6.5.1.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.3.4 for UE fulfilling good serving cell quality criterion.

The test parameters are given in Tables A.6.5.1.9.1-1, A.6.5.1.9.1-2, and A.6.5.1.9.1-3 below. There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.6.5.1.9.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic

CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 is configured as the BFD-RS.

Table A.6.5.1.9.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.1.9.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
Active PCell			Test 1
RF Channel Number			Cell 1
Duplex mode	Config 1		1
	Config 2, 3		FDD
TDD Configuration	Config 1		TDD
	Config 2		Not Applicable
	Config 3		TDDConf.1.1
DL initial BWP configuration	Config 1, 2, 3		TDDConf.2.1
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.0.1
UL initial BWP configuration	Config 1, 2, 3		DLBWP.1.1
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.0.1
RMSI CORESET Reference Channel	Config 1		ULBWP.1.1
	Config 2		CR.1.1 FDD
	Config 3		CR.1.1 TDD
Dedicated CORESET Reference Channel	Config 1		CR.2.1 TDD
	Config 2		CCR.1.3 FDD
	Config 3		CCR.1.3 TDD
SSB Configuration	Config 1		CCR.2.2 TDD
	Config 2		SSB.1 FR1
	Config 3		SSB.1 FR1
SMTc Configuration	Config 1, 2		SSB.2 FR1
	Config 3		SMTc.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		SMTc.1
	Config 3		15 kHz
TRS configuration	Config 1		30 kHz
	Config 2		TRS.1.1 FDD
	Config 3		TRS.1.1 TDD
CSI-RS for RLM	Config 1		TRS.1.2 TDD
	Config 2		Resource #4 in TRS.1.1 FDD
	Config 3		Resource #4 in TRS.1.1 TDD
TCI configuration for PDCCH/PDSCH			Resource #4 in TRS.1.2 TDD
OCNG parameters			TCI.State. 2
CP length			OP.1
Correlation Matrix and Antenna Configuration			Normal
			2x2 Low

Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.X1
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	2.48
T3		s	4.88
D1		s	4.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.6.5.1.9.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS_PDCCH_DMRS_beta		dB	0		
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB			
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS_PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1	1	-15
	Config 2		1	1	-15
	Config 3		1	1	-15
N_{oc}	Config 1	dBm/15kHz	-98		
	Config 2		-98		

	Config 3		-98
goodServingCellEvaluationRLM			configured
offset in goodServingCellEvaluationRLM	dB		Not configured
Propagation condition			TDL-C 300ns 100Hz
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1. Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.6.5.1.7.1-1. Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.			

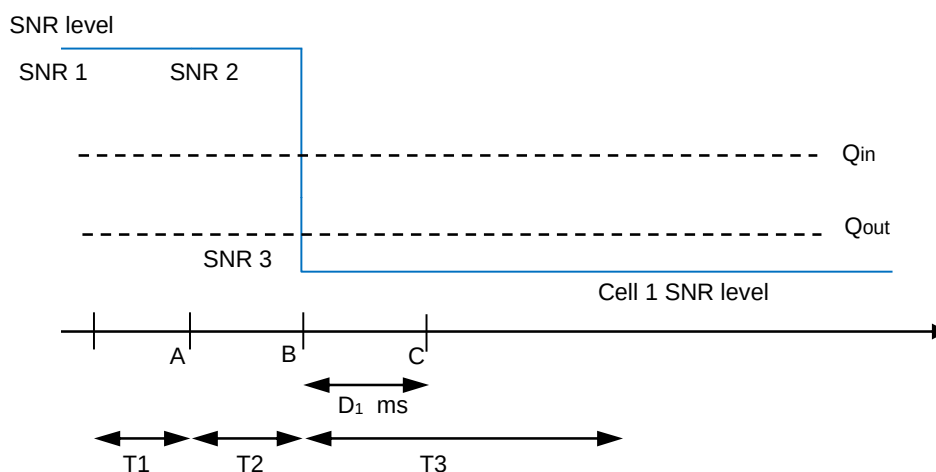


Figure A.6.5.1.9.1-1: SNR variation for CSI-RS out-of-sync testing

A.6.5.1.9.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.2 Interruption

A.6.5.2.1 Interruptions during measurements on deactivated NR SCC in FR1

A.6.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE missed ACK/NACK rate does not exceed the limits at NR PSCell interruptions during the measurement on the deactivated NR SCC. This test will verify the missed ACK/NACK rate for PCell in standalone NR specified in clause 8.2.2.2. Supported test configurations for NR PCell are shown in table A.6.5.2.1.1-1. Supported test configurations for NR SCell are shown in table A.6.5.2.1.1-1A. Test configuration for NR PCell and test configuration for NR SCell are chosen independently.

The general test parameters and NR cell specific test parameters are given in Table A.6.5.2.1.1-2, A.6.5.2.1.1-3 and A.6.5.2.1.1-4 below. In the test there are two cells: Cell1 and Cell2. Cell1 is PCell, Cell2 is an NR deactivated SCell. Cell1 shall be configured as PCell and Cell2 shall be configured as SCell.

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2 and the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector. During T1, PCell is continuously scheduled in DL.

Table A.6.5.2.1.1-1: Interruptions during measurements on deactivated NR SCC supported test configurations for NR PCell

Config	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration,

Table A.6.5.2.1.1-1A: Interruptions during measurements on deactivated NR SCC supported test configurations for NR SCell

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration,

Table A.6.5.2.1.1-2: General test parameters for interruptions during measurements on deactivated NR SCC in standalone NR

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR RF channels
Active PCell		Cell1	PCell on NR RF channel number 1.
Configured deactivated SCell		Cell2	Deactivated SCell on NR RF channel number 2.
CP length		Normal	Applicable to Cell1 and Cell2
DRX		OFF	
Measurement gap pattern Id		OFF	

SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.6.5.2.1.1-3: NR cell specific test parameters for NR PCell for interruptions during measurements on deactivated NR SCC in standalone NR

Parameter		Unit	Cell1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
BW _{channel}	Config 1,2		Note 9
	Config 3		Note 9
BW _{occupied}	Config 1,2	RB	52 ^{Note 7}
	Config 3		106 ^{Note 8}
Initial DL BWP Configuration	Config 1,2,3		DLBWP.0.1
Dedicated DL BWP Configuration	Config 1,2,3		DLBWP.1.1
Initial UL BWP Configuration	Config 1,2,3		ULBWP.0.1
Dedicated UL BWP Configuration	Config 1,2,3		ULBWP.1.1
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.2 TDD
	Config 3		SR.2.1 TDD
CSI-RS for tracking	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
OCNG Patterns	Config 1,2		OP.1 ^{Note 7}
	Config 3		OP.1 ^{Note 8}
SMTC Configuration			SMTC.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N _{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17

N_{oc} ^{Note 2}	Config 1,2	dBm/SCS	-104
	Config 3		-101
I_o ^{Note 3}	Config 1,2	dBm/9.36MHz	-58.96
	Config 3	dBm/38.16MHz	-52.86
Time offset to Cell1 ^{Note 5}		μ s	-
Propagation Condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Void Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells. Note 6: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2 defined in clause 12 of TS 38.213 [3]. Note 7: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured. Note 8: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured. Note 9: $N_{RB,C}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.			

Table A.6.5.2.1.1-4: NR cell specific test parameters for NR SCell for interruptions during measurements on deactivated NR SCC in standalone NR

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config _{SCell} 1		FDD
	Config _{SCell} 2,3		TDD
TDD configuration	Config _{SCell} 1		Not Applicable
	Config _{SCell} 2		TDDConf.1.1
	Config _{SCell} 3		TDDConf.2.1
$BW_{channel}$	Config _{SCell} 1,2		Note 9
	Config _{SCell} 3		Note 9
$BW_{occupied}$	Config _{SCell} 1,2	RB	52 ^{Note 7}
	Config _{SCell} 3		106 ^{Note 8}
Initial DL BWP Configuration	Config _{SCell} 1,2,3		DLBWP.0.1
Dedicated DL BWP Configuration	Config _{SCell} 1,2,3		DLBWP.1.1
Initial UL BWP Configuration	Config _{SCell} 1,2,3		N/A
Dedicated UL BWP Configuration	Config 1,2,3		N/A
PDSCH Reference measurement channel	Config _{SCell} 1		SR.1.1 FDD
	Config _{SCell} 2		SR.1.2 TDD
	Config _{SCell} 3		SR.2.1 TDD
CSI-RS for tracking	Config _{SCell} 1		TRS.1.1 FDD
	Config _{SCell} 2		TRS.1.1 TDD
	Config _{SCell} 3		TRS.1.2 TDD
RMSI CORESET parameters	Config _{SCell} 1		CR.1.1 FDD
	Config _{SCell} 2		CR.1.1 TDD
	Config _{SCell} 3		CR.2.1 TDD
Dedicated CORESET parameters	Config _{SCell} 1		CCR.1.1 FDD
	Config _{SCell} 2		CCR.1.1 TDD
	Config _{SCell} 3		CCR.2.1 TDD

OCNG Patterns	Config _{sCell} 1,2		OP.1 ^{Note 7}
	Config _{sCell} 3		OP.1 ^{Note 8}
SMTC Configuration			SMTC.4
SSB Configuration	Config _{sCell} 1,2		SSB.5 FR1
	Config _{sCell} 3		SSB.6 FR1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N _{oc} ^{Note 2}		dBm/15 kHz	-104
SS-RSRP ^{Note 3}		dBm/15 kHz	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
N _{oc} ^{Note 2}	Config _{sCell} 1,2	dBm/SCS	-104
	Config _{sCell} 3		-101
I _o ^{Note3}	Config _{sCell} 1,2	dBm/9.36MHz	-58.96
	Config _{sCell} 3	dBm/38.16MHz	-52.86
Time offset to Cell1 ^{Note 5}		μs	3
Propagation Condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N _{oc} to be fulfilled within BW _{occupied} .			
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: Void			
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.			
Note 6: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2 defined in clause 12 of TS 38.213 [3].			
Note 7: All UL/DL transmission shall be confined within BW _{occupied} (i.e. 10 MHz, 52 RBs) from F _{C,low} , and I _o is independent of the BW _{channel} configured.			
Note 8: All UL/DL transmission shall be confined within BW _{occupied} (i.e. 40 MHz, 106 RBs) from F _{C,low} , and I _o is independent of the BW _{channel} configured.			
Note 9: N _{RB,c} is derived from Table 5.3.2-1 in TS38.101-1[2] with configured BW _{channel} .			

A.6.5.2.1.2 Test Requirements

The UE shall be continuously scheduled on PCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on PCell.

If the NR PCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PCell immediately before and immediately after an SMTC. Each interruption on NR PCell shall not exceed the value defined in Table A.6.5.2.1.2-1.

If the NR PCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PCell no earlier than 1 slot before an SMTC and no later than 1 slot after the SMTC. the interruption on NR PCell shall not exceed the value defined in Table A.6.5.2.1.2-2.

Table A.6.5.2.1.2-1: Interruption duration if the PCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	1
1	0.5	1

Table A.6.5.2.1.2-2: Interruption duration if the PCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length
0	1	2 + SMTC duration
1	0.5	2 + SMTC duration

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.2.2 SA interruptions at NR SRS carrier based switching

A.6.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that when a UE needs to transmit aperiodic SRS, the UE can perform carrier based switching to one carrier not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission. The test will partly verify the UE missed ACK/NACK does not exceed the interruption requirements on PCell in clause 8.2.2.2.9.

A.6.5.2.2.2 Test Parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the FR1 PCell and Cell 2 is activated SCell on the TDD SCC which operates in downlink without PUCCH/PUSCH. The UE is configured with the SRS switching between PCell and SCell. The test parameters for PCell and SCell are given in Table A.6.5.2.2.2-2 and A.6.5.2.2.2-3 below. The test consists of two successive time periods, with duration of T1 and T2, respectively. Immediately at the beginning of T2, the UE is triggered for SRS switching by DCI 2_3 scheduling. After T2, the UE is expected to transmit aperiodic SRS on a special slot in the configured TDD UL/DL configuration, as scheduled by DCI 2_3..

The test equipment verifies that potential interruption is carried out correctly by monitoring ACK/NACK sent in PCell.

Table A.6.5.2.2.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD – TDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD – TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD – TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.5.2.2.2-2: General test parameters for SA interruptions at NR SRS carrier based switching

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1
Configured SCell		Cell 2	Activated secondary cell on NR RF channel number 2

CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell2 timing offset to cell1	μs	0	
Time alignment error between cell2 and cell1	μs	$\leq$ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	5	
T2	ms	40	UE shall perform SRS switching during T2

Table A.6.5.2.2-3: Cell specific test parameters for SA interruptions at NR SRS carrier based switching

Parameter		Unit	T1		T2	
			Cell 1	Cell 2	Cell 1	Cell 2
Duplex mode	Config 1		FDD	TDD	FDD	TDD
	Config 2,3		TDD			
TDD configuration	Config 1		N/A	TDDConf.1.1	N/A	TDDConf.1.1
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW _{channel}	Config 1,2	MHz	10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
Downlink initial BWP Configuration			DLBWP.0.1			
Downlink dedicated BWP Configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
TCI state			TCI.State.0			
TRS Configuration			TRS.1.1 TDD			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.1.1 TDD	SR.1.1 FDD	SR.1.1 TDD
	Config 2		SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD
	Config 3		SR2.1 TDD	SR2.1 TDD	SR2.1 TDD	SR2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.1.1 TDD	CCR.1.1 FDD	CCR.1.1 TDD
	Config 2		CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD
	Config 3		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.1.1 TDD	CR.1.1 FDD	CR.1.1 TDD
	Config 2		CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD
	Config 3		CR2.1 TDD	CR2.1 TDD	CR2.1 TDD	CR2.1 TDD
OCNG Patterns			OP.1			

SRS Configuration	Config 1,2		SRS.4 TDD
	Config 3		SRS.5 TDD
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTc configuration			SMTc.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} ^{Note2}	Config 1,2,4,5	dBm/15kHz	-104
	Config 3,6		-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP ^{Note3}	Config 1,2,4,5	dBm/SCS	-87
	Config 3,6		-84
SCH_RP ^{Note 3}		dBm/15 kHz	-87
Propagation condition		-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.			

Table A.6.5.2.2.2-4: Void

A.6.5.2.2.3 Test Requirements

The UE shall be scheduled on PCell continuously throughout the test. During the time duration T2, the missed ACK/NACK interruption on PCell shall not be more than the values specified for SA in clause 8.2.2.2.9.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.2.3 SA interruptions at NR SRS antenna port switching with 1 SRS symbol in a slot in NR-CA

A.6.5.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that when a UE performs SRS antenna port switching, i.e. transmits SRS on the antenna port(s) not used for PUCCH/PUSCH transmission and on the antenna port(s) used for PUCCH/PUSCH transmission at different SRS transmission occasions. The test will partly verify the interruption requirements on PCell

and SCell in clause 8.2.2.2.16. The interruption requirement is defined based on the band combination capability reported by UE, i.e., based on *txSwitchImpactToRx* or *txSwitchWithAnotherBand* as specified in requirement applicability in clause 8.2.2.2.16.

A.6.5.2.3.2 Test Parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the FR1 PCell and Cell 2 is activated SCell on the TDD PCC. Only PCC may be configured with more than 1 SRS resources in each SRS resource set with usage set to 'antennaSwitching'. The test parameters for PCell and SCell are given in Table A.6.5.2.3.2-2 and A.6.5.2.3.2-3 below. The test consists of two successive time periods, with duration of T1 and T2, respectively. Immediately at the beginning of T2, the UE is configured with periodic SRS for antenna port switching via RRC reconfiguration. Note that the RRC reconfiguration message should be sent to UE at the time 50ms before the beginning of T2.

The test equipment verifies that potential interruption is carried out correctly by monitoring ACK/NACK sent in SCell.

Table A.6.5.2.3.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode for NR PCell and FDD duplex mode for NR SCell
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode for NR PCell and TDD duplex mode for NR SCell
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode for NR PCell and TDD duplex mode for NR SCell
Note1: The UE is only required to be tested in one of the supported test configurations.	
Note2: Test configuration for NR PCell and NR SCell are chosen independently.	

Table A.6.5.2.3.2-2: General test parameters for SA interruptions at NR SRS antenna switching

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1
Configured SCell		Cell 2	Activated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell2 timing offset to cell1	μs	0	
Time alignment error between cell2 and cell1	μs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	5	
T2	ms	40	UE shall perform SRS antenna switching during T2

Table A.6.5.2.3.2-3: Cell specific test parameters for SA interruptions at NR SRS antenna switching

Parameter		Unit	T1		T2	
			Cell 1	Cell 2	Cell 1	Cell 2
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		N/A			
	Config 2		TDDConf.1.2			
	Config 3		TDDConf.2.3			
BW _{channel}	Config 1,2	MHz	10: N _{RB,c} = 52			

	Config 3		40: $N_{RB,c} = 106$			
Downlink initial BWP Configuration			DLBWP.0.1			
Downlink dedicated BWP Configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
TCI state			TCI.State.0			
TRS Configuration			TRS.1.1 TDD			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.1.1 FDD	SR.1.1 FDD	SR.1.1 FDD
	Config 2		SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD
	Config 3		SR2.1 TDD	SR2.1 TDD	SR2.1 TDD	SR2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.1.1 FDD	CCR.1.1 FDD	CCR.1.1 FDD
	Config 2		CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD
	Config 3		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.1.1 FDD	CR.1.1 FDD	CR.1.1 FDD
	Config 2		CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD
	Config 3		CR2.1 TDD	CR2.1 TDD	CR2.1 TDD	CR2.1 TDD
OCNG Patterns			OP.1			
SRS Configuration	Config 1,2		SRS.1, with dedicated SRS configuration in Table A.6.5.2.3.2-4			
	Config 3		SRS.2, with dedicated SRS configuration in Table A.6.5.2.3.2-4			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
SMTC configuration			SMTC.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 2)						
N_{oc} ^{Note3}	Config 1,2,4,5	dBm/15kHz	-104			

	Config 3,6		-101
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
SS-RSRP ^{Note4}	Config 1,2,4,5	dBm/SCS	-87
	Config 3,6		-84
SCH_RP ^{Note 4}		dBm/15 kHz	-87
Propagation condition		-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.			
Note 5: Test configuration for NR PCell and NR SCell are chosen independently.			

Table A.6.5.2.3.2-4: Specific Sounding Reference Symbol Configuration for xTyR configuration

Parameter		xTyR configuration							
		1T2R		2T4R		1T4R			
srs-ResourceId		0	1	0	1	0	1	2	3
startPosition		3	3	3	3	3	3	3	3
nrofSRS-Ports		port1	port1	port2	port2	port1	port1	port1	port1
nrofSymbols		1	1	1	1	1	1	1	1
periodicityAndOffset-p	Config 1,2	sl40, 1	sl40, 6	sl40, 1	sl40, 6	sl40, 1	sl40, 6	sl40, 11	sl40, 16
	Config 3	sl80, 3	sl80, 13	sl80, 3	sl80, 13	sl80, 3	sl80, 13	sl80, 23	sl80, 33

A.6.5.2.3.3 Test Requirements

The UE shall be scheduled on SCell continuously throughout the test.

During the time duration T2, the DL interruption on NR SCell during the SRS antenna switching in each SRS transmission slot on NR PCell shall not exceed 1 slot if SCell is indicated in *txSwitchImpactToRx*.

During the time duration T2, the UL interruption on NR SCell during the SRS antenna switching in each SRS transmission slot on NR PCell shall not exceed 1 slot if SCell is indicated in *txSwitchWithAnotherBand*.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.2.4 SA interruptions at NR SRS antenna port switching

A.6.5.2.4.1 Test Purpose and Environment

The purpose of this test is to verify the interruption requirement on victim CC during SRS antenna port switching with more than 1 SRS symbols on aggressor CC defined in clause 8.2.2.2.16. The interruption requirement is defined based on the band combination capability reported by UE, i.e., based on *txSwitchImpactToRx* or *txSwitchWithAnotherBand* as specified in requirement applicability in clause 8.2.2.2.16.

A.6.5.2.4.2 Test Parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the FR1 PCell and Cell 2 is FR1 SCell. The UE is configured with the SRS antenna port in FR1 PCell. The test parameters for PCell and SCell are given in Table A.6.5.2.4.2-2 and A.6.5.2.4.2-3 below. Common SRS configuration is given in A.3.24. Dedicated SRS configuration which is dependent on reported SRS capability *supportedSRS-TxPortSwitch*, is given in Table A.6.5.2.4.2-4. The test consists of two successive time periods, with duration of T1 and T2, respectively. Immediately at the beginning of T2, the UE is triggered for SRS antenna port switching.

The test equipment verifies that potential interruption is carried out correctly by monitoring ACK/NACK sent in PCell.

Table A.6.5.2.4.2-1: Supported test configurations

Configuration	Description	
	NR PCell ^{Note 2}	NR SCell ^{Note 2}
1	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.		
Note 2: Test configuration for NR PCell and NR SCell are chosen independently.		

Table A.6.5.2.4.2-2: General test parameters for SA interruptions at NR SRS antenna port switching

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1
Configured SCell		Cell 2	Activated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell2 timing offset to cell1	μs	0	
Time alignment error between cell2 and cell1	μs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	5	
T2	ms	40	UE shall perform SRS antenna port switching during T2

Table A.6.5.2.4.2-3: Cell specific test parameters for SA interruptions at NR SRS antenna port switching

Parameter		Unit	T1		T2	
			Cell 1	Cell 2	Cell 1	Cell 2
Duplex mode	Config 1		FDD	TDD	FDD	TDD
	Config 2,3		TDD			
TDD configuration	Config 1		N/A	TDDConf.1.2	N/A	TDDConf.1.2
	Config 2		TDDConf.1.2			
	Config 3		TDDConf.2.3			
BW _{channel}	Config 1,2	MHz	10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			

Downlink initial BWP Configuration			DLBWP.0.1			
Downlink dedicated BWP Configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
TCI state			TCI.State.0			
TRS Configuration			TRS.1.1 TDD			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.1.1 TDD	SR.1.1 FDD	SR.1.1 TDD
	Config 2		SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD
	Config 3		SR2.1 TDD	SR2.1 TDD	SR2.1 TDD	SR2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.1.1 TDD	CCR.1.1 FDD	CCR.1.1 TDD
	Config 2		CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD
	Config 3		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.1.1 TDD	CR.1.1 FDD	CR.1.1 TDD
	Config 2		CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD
	Config 3		CR2.1 TDD	CR2.1 TDD	CR2.1 TDD	CR2.1 TDD
ptrs-portindex			NA.	n0	NA.	n1
OCNG Patterns			OP.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
SRS configuration	Config 1,2		SRS.x1 ^{Note 4}	-	SRS.1 ^{Note 4}	-
	Config 3		SRS.x2 ^{Note 4}	-	SRS.2 ^{Note 4}	-
SMTC configuration			SMTC.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	Config 1,2		-104			

	Config 3	dBm/15 kHz	-101
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
SS-RSRP ^{Note3}	Config 1,2	dBm/SC S	-87
	Config 3		-84
SCH_RP ^{Note 3}		dBm/15 kHz	-87
Propagation condition		-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Dedicated SRS configuration in Table A.6.5.2.4.2-4			

Table A.6.5.2.4.2-4: Dedicated Sounding Reference Symbol Configuration for xTyR configuration

Parameter		xTyR configuration							
		1T2R		2T4R		1T4R			
srs-ResourceId		0	1	0	1	0	1	2	3
nrofSymbols		1	1	1	1	1	1	1	1
startPosition		5	3	5	3	5	3	5	3
nrofSRS-Ports		port1	port1	port2	port2	port1	port1	port1	port1
periodicityAndOffset-p	Config 1,2	sl40, 1	sl40, 1	sl40, 1	sl40, 1	sl40, 1	sl40, 1	sl40, 6	sl40, 6
	Config 3	sl80, 3	sl80, 3	sl80, 3	sl80, 3	sl80, 3	sl80, 3	sl80, 13	sl80, 13

A.6.5.2.4.3 Test Requirements

The UE shall be scheduled on PCell continuously throughout the test. During the time duration T2, the interruption on SCell shall not be more than the values specified in Table 8.2.1.2.18-3 in clause 8.2.1.2.18 for each SRS transmission slot.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.3 SCell Activation and Deactivation Delay

A.6.5.3.1 SCell Activation and deactivation of known SCell in FR1 in non-DRX for 160ms SCell measurement cycle

A.6.5.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements stated in clause 8.3, when the SCell in FR1 is known by the UE at the time of activation.

The supported test configurations for NR PCell are shown in table A.6.5.3.1.1-1 below. Supported test configurations for NR SCell are shown in table A.6.5.3.1.1-1A. Test configuration for NR PCell and test configuration for NR SCell are chosen independently. The test parameters are given in Tables A.6.5.3.1.1-2 and

cell-specific parameters in A.6.5.3.1.1-3 and A.6.5.3.1.1-4 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1, but is not aware of Cell2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. The test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n , defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated SCell at latest in slot $n + \frac{T_{\text{HARQ}} + T_{\text{activation time}} + T_{\text{CSI Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3. The UE shall start reporting CSI in PCell after at least one CSI-RS transmission occasion for channel measurement plus $n_{\text{CSI_ref}}$ slots, as defined in 5.2.2.5 in [26], and reporting after slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption due to activation of SCell shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted m , is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot $m + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3, and The starting point of any PCell interruption due to the deactivation shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for SCell is discontinued.

Table A.6.5.3.1.1-1: known FR1 SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations for NR PCell

Config	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration,

Table A.6.5.3.1.1-1A: known FR1 SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations for NR SCell

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations

Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration,

Table A.6.5.3.1.1-2: General test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μs	0	
Time alignment error between cell2 and cell1	μs	$\leq$ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
A3-offset	dB	-15	
T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	$k_1 \times \text{NR slot length}$ k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.
$T_{\text{CSI_Reporting}}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.6.5.3.1.1-3: Cell specific test parameters for NR PCell for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 1		
			T1	T2	T3
Duplex mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
BW_{channel}	Config 1,2	MHz	Note 7		

BW _{occupied}	Config 3	RB	Note 7
	Config 1,2		52 ^{Note 5}
	Config 3		106 ^{Note 6}
Initial BWP configuration			DLBWP.0.1
TCI state			TCI.State.0
TRS Configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
OCNG Patterns	Config 1,2		OP.1 ^{Note 5}
	Config 3,		OP.1 ^{Note 6}
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
CSI-RS configuration for CSI reporting (Note 8)	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
SMTC configuration			SMTC.1
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity	Config 1,2	slot	5
	Config 3		10
CSI reporting offset	Config 1,2	slot	3
	Config 3		5
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N_{oc} ^{Note2}	Config 1,2	dBm/SCS	-104
	Config 3		-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP ^{Note3}	Config 1,2	dBm/SCS	-87
	Config 3		-84
SCH_RP ^{Note 3}		dBm/15 kHz	-87
I ₀ ^{Note3}	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.87
Propagation condition		-	AWGN
Correlation Matrix and Antenna Configuration		-	2x2 Low
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.
Note 3:	SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.
Note 5:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.
Note 6:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.
Note 7:	$N_{RB,c}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.
Note 8:	On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.

Table A.6.5.3.1.1-4: Cell specific test parameters for NR SCell for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 2		
			T1	T2	T3
Duplex mode	Config _{SCell} 1		FDD		
	Config _{SCell} 2,3		TDD		
TDD configuration	Config _{SCell} 1		Not applicable		
	Config _{SCell} 2		TDDConf.1.1		
	Config _{SCell} 3		TDDConf.2.1		
BW _{channel}	Config _{SCell} 1,2	MHz	Note 7		
	Config _{SCell} 3		Note 7		
BW _{occupied}	Config _{SCell} 1,2	RB	52 Note 5		
	Config _{SCell} 3		106 Note 6		
Initial BWP configuration			DLBWP.0.1		
TCI state			TCI.State.0		
TRS Configuration	Config _{SCell} 1		TRS.1.1 FDD		
	Config _{SCell} 2		TRS.1.1 TDD		
	Config _{SCell} 3		TRS.1.2 TDD		
PDSCH Reference measurement channel	Config _{SCell} 1		N/A		
	Config _{SCell} 2		N/A		
	Config _{SCell} 3		N/A		
Dedicated CORESET parameters	Config _{SCell} 1		N/A		
	Config _{SCell} 2		N/A		
	Config _{SCell} 3		N/A		
RMSI CORESET parameters	Config _{SCell} 1		N/A		
	Config _{SCell} 2		N/A		
	Config _{SCell} 3		N/A		
OCNG Patterns	Config _{SCell} 1,2		OP.1 ^{Note 5}		
	Config _{SCell} 3,		OP.1 ^{Note 6}		
SSB Configuration	Config _{SCell} 1,2		SSB.1 FR1		
	Config _{SCell} 3		SSB.2 FR1		
CSI-RS configuration for CSI reporting ^{Note 8}	Config _{SCell} 1		CSI-RS.1.1 FDD		
	Config _{SCell} 2		CSI-RS.1.1 TDD		
	Config _{SCell} 3		CSI-RS.2.1 TDD		
SMTc configuration			SMTc.1		
reportConfigType			N/A		
reportQuantity			N/A		
CSI reporting periodicity	Config _{SCell} 1,2	slot	N/A		
	Config _{SCell} 3		N/A		
CSI reporting offset	Config _{SCell} 1,2	slot	N/A		

	Config _{SCell} 3		N/A
EPRE ratio of PSS to SSS			
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N_{oc} ^{Note2}	Config _{SCell} 1,2		-104
	Config _{SCell} 3		-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP ^{Note3}	Config _{SCell} 1,2		-87
	Config _{SCell} 3		-84
SCH_RP ^{Note 3}		dBm/15 kHz	-87
I_o ^{Note3}	Config _{SCell} 1,2	dBm/ 9.36MHz	-58.96
	Config _{SCell} 3	dBm/ 38.16MHz	-52.87
Propagation condition		-	AWGN
Correlation Matrix and Antenna Configuration			2x2 Low
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$. Note 3: SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2. Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured. Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured. Note 7: $N_{RB,c}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$. Note 8: On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.			

A.6.5.3.1.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after at least one CSI-RS transmission occasion for channel measurement plus n_{CSI_ref} slots, as defined in 5.2.2.5 in [26], and reporting after slot $(n + 1 + \frac{T_{HARQ} + 3ms}{NR \text{ slot length}})$. UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption.

During T3 the UE shall stop sending CSI reports for SCell at latest in a slot $m + \frac{T_{HARQ} + 3ms}{NR \text{ slot length}}$, as defined in clause 8.3.

During T2 interruption of PCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{NR \text{ slot length}}$ to $n + 1 + \frac{T_{HARQ} + 3ms + T_X}{NR \text{ slot length}} + N_{interruption}$, as defined in clause 8.3.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

The interruption on any activated serving cell shall not be more than the values specified for SA in clause 8.2.2.2.2.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $\frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.6.5.3.2 SCell Activation and deactivation of known SCell in FR1 in non-DRX for 640 ms SCell measurement cycle

A.6.5.3.2.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.6.5.3.1.1. The supported test configurations are the same as defined in clause A.6.5.3.1.1. The test parameters are the same except those described in the following clause. The listed parameter values in Tables A.6.5.3.2.1-1 will replace the values of corresponding parameters in Tables A.6.5.3.1.1-1.

Table A.6.5.3.2.1-1: General test parameters for known FR1 SCell activation case, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

A.6.5.3.2.2 Test Requirements

The test requirements defined in clause A.6.5.3.1.2 shall apply to this test case, except $T_{\text{activation_time}}$ will be replaced with the value $T_{\text{FirstSSB_MAX}} + T_{\text{rs}} + 5\text{ms}$.

A.6.5.3.3 SCell Activation and deactivation of unknown SCell in FR1 in non-DRX

A.6.5.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements stated in clause 8.3, when the SCell in FR1 is known by the UE at the time of activation.

The supported test configurations are shown in table A.6.5.3.1.1-1 below. The test parameters are given in Tables A.6.5.3.1.1-2 and cell-specific parameters in A.6.5.3.1.1-3 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1, but is not aware of Cell2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. The test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n, defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated SCell at latest in slot $n + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3. The UE shall start reporting CSI in PCell after at least one CSI-RS transmission occasion for channel measurement plus $n_{\text{CSI_ref}}$ slots, as defined in 5.2.2.5 in [26], and

reporting after slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption due to activation of SCell shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted m, is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot $m + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3, and The starting point of any PCell interruption due to the deactivation shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for SCell is discontinued.

Table A.6.5.3.3.1-1: General test parameters for unknown FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
T1	ms	100	During this time the PCell shall be known and the SCell configured, but not detected.

A.6.5.3.3.2 Test Requirements

The test requirements defined in clause A.6.5.3.1.2 shall apply to this test case, except $T_{\text{activation_time}}$ will be replaced with the value $T_{\text{FirstSSB_MAX}} + T_{\text{SMTc_MAX}} + 2 \cdot T_{\text{rs}} + 5\text{ms}$ as defined in clause 8.3.

A.6.5.3.4 Direct SCell activation at SCell addition of known SCell in FR1

A.6.5.3.4.1 Test Purpose and Environment

The purpose of this test is to verify fulfillment of direct SCell activation delay and interruption requirements at SCell addition as defined in clause 8.3.4 and 8.2.2, respectively. The supported test configurations for NR PCell are shown in Table A.6.5.3.4.1-1. The supported test configurations for NR SCell are shown in Table A.6.5.3.4.1-1A. Test configuration for NR PCell and test configuration for NR SCell are chosen independently.

The test scenario comprises one PCell (Cell 1) and one SCell (Cell 2) as outlined in Table A.6.5.3.4.1-2. Cell-specific parameters are provided in Table A.6.5.3.4.1-3 and Table A.6.5.3.4.1-4.

The test consists of two successive time periods with duration T1 and T2, respectively. There are two carriers, each with one cell. Cell 1 (PCell) is on RF channel 1 (PCC), and Cell 2 (SCell) is on RF channel 2 (SCC). Cell 1 and Cell 2 both operate according to one of the configurations in Table A.6.5.3.4.1-1 and Table A.6.5.3.4.1-1A respectively.

Before the test starts the UE is connected to Cell 1 on RF channel 1. The UE is only monitoring RF channel 1 and is not aware of Cell 2 on RF channel 2.

The UE is continuously scheduled in PCell throughout the test.

At the beginning of T1 the UE is configured to measure RF channel 2 in measurement gaps. During T1, the UE detects and measures Cell 2 on RF channel 2, and sends a measurement report containing Cell 2 to the test equipment. After having received a measurement report containing Cell 2, the test equipment deconfigures the

measurement gaps and thereafter sends a RRC connection reconfiguration message to the UE by which it configures the SCell (Cell 2) in activated state (*sCellState* is set to *activated*). The time between reception of the last measurement report carrying SCell and transmission of the RRC connection reconfiguration message directly activating SCell is kept short enough to allow the SCell to remain known to the UE.

Time period T2 starts when the UE receives the RRC connection reconfiguration message at the UE antenna connector. The corresponding slot at which the message is received at the UE antenna connector is denoted n . The UE shall complete activation of the SCell no later than in slot $n + \frac{N_{\text{direct}}}{\text{NR slot length}}$, as specified in clause 8.3.4. From slot $n + \frac{N_{\text{direct}}}{\text{NR slot length}}$ and onwards the UE shall report valid CSI both for PCell and SCell.

The test equipment verifies the activation time by counting the slots between the RRC connection reconfiguration message is sent and until CSI report with non-zero CQI for both PCell and SCell is received.

The test equipment verifies that interruptions on other serving cells are within the requirements by counting ACK/NACKs transmitted in PCell.

Table A.6.5.3.4.1-1: Supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration,

Table A.6.5.3.4.1-1A: Supported test configurations for NR SCell

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration,

Table A.6.5.3.4.1-2: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Inter-frequency neighbor cell (SCell to-be)		Cell 2	Inter-frequency neighbor cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Measurement gap pattern		gp0	Measurement gap is used during parts of time period T1 for detection of Cell 2.
CSI reporting periodicity	ms	2	CSI reporting periodicity for periodic reporting of CQI for PCell and, when added, SCell.
SCell measurement cycle (measCycleSCell)	ms	160	Measurement cycle for SCell does not come into effect in direct activation at SCell addition.
Timing offset between Cell 1 and Cell 2	μs	$\leq \text{MRTD}$	The value of maximum timing offset depends upon the carrier aggregation scenario.

T1	s	7	During this time period the PCell shall be known and Cell 2 shall be detected as an inter-frequency neighbor cell.
T2	s	1	During this time period Cell 2 shall be configured and directly activated as SCell.
A3-offset	dB	-15	
THARQ	ms	$k_1 \times \text{NR slot length}$	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by dl-DataToUL-ACK if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
TCSI_Reporting	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k	ms	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe}, \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.6.5.3.4.1-3: NR Cell specific test parameters

Parameter		Unit	Cell 1	
			T1	T2
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
BW _{channel}	Config 1,2	MHz	10: N _{RB,c} = 52	
	Config 3		40: N _{RB,c} = 106	
BWP configuration	Initial DL		DLBWP.0.1	
	Initial UL		ULBWP.0.1	
	Dedicated DL		DLBWP.1.1	
	Dedicated UL		ULBWP.1.1	
TCI state			TCI.State.0	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS Configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
RMSI CORESET parameters	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
OCNG Pattern			OP.1	
SSB Configuration	Config 1,2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC configuration			SMTC.1	
reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2	slot	5	
	Config 3		10	
CSI reporting offset	Config 1,2	slot	3	
	Config 3		5	

EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note1}			
N_{Oc} ^{Note2}	Config 1,2	dBm/SCS	-104
	Config 3		-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{Oc}$		dB	17
SS-RSRP ^{Note3}	Config 1,2	dBm/SCS	-87
	Config 3		-84
I_o ^{Note3}	Config 1,2	dBm/9.36 MHz	-59.0
	Config 3	dBm/38.16 MHz	-52.9
Propagation condition			AWGN
Correlation Matrix and Antenna Configuration			1x2 Low
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{Oc} to be fulfilled.			
Note 3: SS-RSRP, SCH_RP, and I_o levels have been derived from other parameters for information purpose. They are not setttable parameters themselves.			

Table A.6.5.3.4.1-4: NR Cell specific test parameters for NR Scell

Parameter		Unit	Cell 2	
			T1	T2
Duplex mode	Config _{Scell} 1		FDD	
	Config _{Scell} 2,3		TDD	
TDD configuration	Config _{Scell} 2		TDDConf.1.1	
	Config _{Scell} 3		TDDConf.2.1	
BW _{channel}	Config _{Scell} 1,2	MHz	10: N _{RB,C} = 52	
	Config _{Scell} 3		40: N _{RB,C} = 106	
BWP configuration	Initial DL		N/A	DLBWP.0.1
	Initial UL			N/A
	Dedicated DL			DLBWP.1.1
	Dedicated UL			N/A
TCI state			N/A	TCI.State.0
CSI-RS configuration for CSI reporting	Config _{Scell} 1		N/A	CSI-RS.1.1 FDD
	Config _{Scell} 2			CSI-RS.1.1 TDD
	Config _{Scell} 3			CSI-RS.2.1 TDD
TRS Configuration	Config _{Scell} 1		N/A	TRS.1.1 FDD
	Config _{Scell} 2			TRS.1.1 TDD
	Config _{Scell} 3			TRS.1.2 TDD
PDSCH Reference measurement channel	Config _{Scell} 1		N/A	SR.1.1 FDD
	Config _{Scell} 2			SR.1.1 TDD
	Config _{Scell} 3			SR.2.1 TDD
Dedicated CORESET parameters	Config _{Scell} 1		N/A	CCR.1.1 FDD
	Config _{Scell} 2			CCR.1.1 TDD
	Config _{Scell} 3			CCR.2.1 TDD
		Config _{Scell} 1	N/A	

RMSI CORESET parameters	Config _{SCell} 2		
	Config _{SCell} 3		
OCNG Pattern			OP.1
SSB Configuration	Config _{SCell} 1,2		SSB.1 FR1
	Config _{SCell} 3		SSB.2 FR1
SMTc configuration			SMTc.1
reportConfigType			N/A
reportQuantity			N/A
CSI reporting periodicity	Config _{SCell} 1,2	slot	N/A
	Config _{SCell} 3		N/A
CSI reporting offset	Config _{SCell} 1,2	slot	N/A
	Config _{SCell} 3		N/A
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note1}			
N_{oc} ^{Note2}	Config _{SCell} 1,2	dBm/SCS	-104
	Config _{SCell} 3		-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP ^{Note3}	Config _{SCell} 1,2	dBm/SCS	-87
	Config _{SCell} 3		-84
I_o ^{Note3}	Config _{SCell} 1,2	dBm/9.36 MHz	-59.0
	Config _{SCell} 3	dBm/38.16 MHz	-52.9
Propagation condition			AWGN
Correlation Matrix and Antenna Configuration			1x2 Low
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: SS-RSRP, SCH_RP, and I_o levels have been derived from other parameters for information purpose. They are not settable parameters themselves.			

A.6.5.3.4.2 Test Requirements

The UE shall complete the direct activation of the SCell no later than at slot $n + \frac{N_{direct}}{NR \text{ slot length}}$.

The UE shall report non-zero CQI for SCell from slot $n + \frac{N_{direct}}{NR \text{ slot length}}$ and onwards throughout time period T2.

The interruption on PCell during direct activation of the SCell shall occur within the interruption window specified in clause 8.3.4 and shall not exceed the length specified in clause 8.2.2.2.11.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.3.5 Direct SCell activation at handover with known SCell in FR1

A.6.5.3.5.1 Test Purpose and Environment

This test is to verify the requirement for the FDD-FDD and TDD-TDD intra frequency handover with direct SCell activation requirements specified in subclause 8.3.5.

Supported test configurations for NR PCell are shown in table A.6.5.3.5.1-1. Supported test configurations for NR SCell are shown in table A.6.5.3.5.1-1A. Test configuration for NR PCell and test configuration for NR SCell are chosen independently. Both handover with direct SCell activation requirements are tested by using the parameters in table A.6.5.3.5.1-2, A.6.5.3.5.1-3 and A.6.5.3.5.1-4.

The test scenario comprises of two NR carriers and the 3 cells as given in tables A.6.5.3.5.1-1 and A.6.5.3.5.1-2. The test consists of three successive time periods, with time durations of T1, T2, and T3 respectively.

At the start of time duration T1, the UE is in connected mode with PCell and SCell1 (cell 2) is in activated state and UE is reporting CQI for both PCell and SCell1.

Time period T2 starts when UE receives a handover command to Cell 3 that also activates SCell1 (Cell2). This is done using an *RRCReconfiguration* message with parameter *sCellState* set to *activated* for the SCell1 (Cell 2). The message is sent from the test equipment to the UE and is received in a subframe # denoted n at the UE antenna connector. The UE shall accomplish the activation of the SCell no later than subframe (n + N_{direct}).

Time period T3 starts at (n + N_{direct}), at which point UE shall be reporting a valid CQI for both PCell and SCell1.

Table A.6.5.3.5.1-1: Intra-frequency handover with direct SCell activation from FR1 to FR1 test configurations for NR PCell

Config	Description
1	Source PCell: NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode Target PCell: NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	Source PCell: NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode Target PCell: NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	Source PCell: NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode Target PCell: NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth (BW _{channel}) defined in each test configuration,

Table A.6.5.3.5.1-1A: Intra-frequency handover with direct SCell activation from FR1 to FR1 test configurations for NR SCell

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth (BW _{channel}) defined in each test configuration.

Table A.6.5.3.5.1-2: General test parameters Intra-frequency handover with direct SCell activation from FR1 to FR1

Parameter	Unit	Value	Comment
Initial conditions	PCell	Cell 1	
	SCell	Cell 2	

	Target cell		Cell 3	
Final condition	PCell		Cell 3	
	SCell		Cell 2	
	neighbour cell		Cell 1	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
PRACH configuration index			FR1 PRACH configuration 1	As specified in table Table 6.3.3.2-3 in TS 38.211 [6]
Time offset between cells			3 μ s	Synchronous cells
T1		s	5	UE is in connected mode with PCell and SCell1 (cell 2) is in activated state. UE receives a handover command
T2		s	N _{direct}	UE shall accomplish the activation of the SCell
T3		s	1	
A3-offset		dB	-15	
T _{HARQ}		slot	k	k is a number of slots indicated by the PDSCH-to-HARQ _{feedback} timing indicator field in a corresponding DCI format or provided by <i>dl-DataToUL-ACK</i> if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
T _{CSI_Reporting}		ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k		ms	$k_1 + 3 \cdot N_{\text{subframe}, \mu}^{\text{slot}} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.6.5.3.5.1-3: Cell specific test parameters for NR PCell for NR FR1-FR1 Intra frequency handover with direct SCell activation test case

Parameter		Unit	Cell 1			Cell 3		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		40: N _{RB,c} = 106					
BWP BW	Config 1	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		40: N _{RB,c} = 106					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD					
	Config 2		SR.1.1 TDD					
	Config 3		SR.2.1 TDD					
CORESET Reference Channel	Config 1		CR.1.1 FDD					
	Config 2		CR.1.1 TDD					
	Config 3		CR.2.1 TDD					
TRS configuration	Config 1		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					

	Config 3		TRS.1.2 TDD					
OCNG Patterns			OCNG pattern 1					
SMT C Configuration			SMT C pattern 1					
SSB Configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					
PRACH configuration			FR1 PRACH configuration 1					
BWP configuraiton	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD					
	Config 2		CSI-RS.1.1 TDD					
	Config 3		CSI-RS.2.1 TDD					
reportConfigType			periodic					
reportQuantity			cri-RI-PMI-CQI					
CSI reporting periodicity	Config 1,2	slot	5					
	Config 3		10					
CSI reporting offset	Config 1,2	slot	3					
	Config 3		5					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc}^{Note2}		dBm/15kHz	-98					
N_{oc}^{Note2}	Config 1,2	dBm/SCS	-98					
	Config 3		-95					
$\hat{E}_s/I_{ot}$		dB	8	8	8	8	8	8
$\hat{E}_s/N_{oc}$		dB	8	8	8	8	8	8
SSB_RP	Config 1,2	dBm/SCS	-90	-90	-90	-90	-90	-90
	Config 3	dBm/SCS	-87	-87	-87	-87	-87	-87

I ₀ ^{Note3}	Config 1,2	dBm/ 9.36MHz	-58.71	-58.71	-58.71	-58.71	-58.71	-58.71
	Config 3	dBm/ 38.16MHz	-52.60	-52.60	-52.60	-52.60	-52.60	-52.60
Propagation condition		-	AWGN			AWGN		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	I ₀ levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

Table A.6.5.3.5.1-4: Cell specific test parameters for NR SCell for NR FR1-FR1 Intra frequency handover with direct SCell activation test case

Parameter		Unit	Cell 2		
			T1	T2	T3
NR RF Channel Number			2		
Duplex mode	Config _{sCell} 1		FDD		
	Config _{sCell} 2,3		TDD		
TDD configuration	Config _{sCell} 1		Not Applicable		
	Config _{sCell} 2		TDDConf.1.1		
	Config _{sCell} 3		TDDConf.2.1		
BW _{channel}	Config _{sCell} 1	MHz	10: N _{RB,c} = 52		
	Config _{sCell} 2		10: N _{RB,c} = 52		
	Config _{sCell} 3		40: N _{RB,c} = 106		
BWP BW	Config _{sCell} 1	MHz	10: N _{RB,c} = 52		
	Config _{sCell} 2		10: N _{RB,c} = 52		
	Config _{sCell} 3		40: N _{RB,c} = 106		
DRx Cycle		ms	Not Applicable		
PDSCH Reference measurement channel	Config _{sCell} 1		SR.1.1 FDD		
	Config _{sCell} 2		SR.1.1 TDD		
	Config _{sCell} 3		SR.2.1 TDD		
CORESET Reference Channel	Config _{sCell} 1		CR.1.1 FDD		
	Config _{sCell} 2		CR.1.1 TDD		
	Config _{sCell} 3		CR.2.1 TDD		
TRS configuration	Config _{sCell} 1		TRS.1.1 FDD		
	Config _{sCell} 2		TRS.1.1 TDD		
	Config _{sCell} 3		TRS.1.2 TDD		
OCNG Patterns			OCNG pattern 1		
SMTc Configuration			SMTc pattern 1		
SSB Configuration	Config _{sCell} 1,2		SSB.1 FR1		
	Config _{sCell} 3		SSB.2 FR1		
PDSCH/PDCCH subcarrier spacing	Config _{sCell} 1,2	kHz	15 kHz		
	Config _{sCell} 3		30 kHz		
PUCCH/PUSCH subcarrier spacing	Config _{sCell} 1,2	kHz	15 kHz		
	Config _{sCell} 3		30 kHz		
PRACH configuration			FR1 PRACH configuration 1		
BWP configuraiton	Initial DL BWP		DLBWP.0.1		
	Dedicated DL BWP		DLBWP.1.1		
	Initial UL BWP		ULBWP.0.1		
	Dedicated UL BWP		ULBWP.1.1		
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					

EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc}^{Note2}		dBm/15kHz	-98		
N_{oc}^{Note2}	Config _{SCell 1,2}	dBm/SCS	-98		
	Config _{SCell 3}		-95		
$\hat{E}_s/I_{ot}$		dB	8	8	8
$\hat{E}_s/N_{oc}$		dB	8	8	8
SSB_RP	Config _{SCell 1,2}	dBm/SCS	-90	-90	-90
	Config _{SCell 3}	dBm/SCS	-87	-87	-87
I_o^{Note3}	Config _{SCell 1,2}	dBm/ 9.36MHz	-61.41	-61.41	-61.41
	Config _{SCell 3}	dBm/ 38.16MHz	-55.31	-55.31	-55.31
Propagation condition		-	AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.6.5.3.5.2 Test Requirements

The UE shall be capable to transmit valid CSI report for the directly activated SCell1 no later than in subframe $n+N_{direct}$.

The rate of correct observed SCell1 direct activation delay during repeated tests shall be at least 90%.

NOTE: The SCell activation delay, N_{direct} , can be expressed as: $N_{direct} = T_{RRC_process} + T_{interrupt} + T_2 + T_3 + T_{activation_time} + T_{CSI_Reporting} - 3ms$, where:

$T_{RRC_Process}$: RRC procedure delay defined in clause 12 of TS 38.331 [2],

$T_{interrupt}$: Interruption time during handover as specified in clause 6.1.1,

T_2 : Delay from slot $n + \frac{T_{RRC_Process} + T_{interrupt}}{NR\ slot\ length}$ until UE has obtained a valid TA command for the target PCell,

T_3 : Delay for applying the received TA for uplink transmission in the target PCell, and greater than or equal to $k+1$ slot, where k is defined in clause 4.2 in TS 38.213,

$T_{activation_time}$ and $T_{CSI_Reporting}$ are specified in clause 8.3.2, where the following definitions of $T_{FirstSSB}$ and $T_{FirstSSB_MAX}$ as defined in section 8.3.5 shall apply:

- $T_{FirstSSB}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot $n + (T_{RRC_Process} + T_{interrupt} + T_2 + T_3) / (NR\ slot\ length)$
- $T_{FirstSSB_MAX}$: the time to the end of the first complete SSB burst indicated by the SMTC after slot $n + (T_{RRC_Process} + T_{interrupt} + T_2 + T_3) / (NR\ slot\ length)$

This gives a total of $N_{direct} = 10 + 52 + T_{IU} + T_2 + T_3 + T_{activation_time} + T_{CSI_Reporting} - 3\ ms = 62 + 10 + 13 + 6 + 20 + 2 - 3 = 94\ ms$ for test configurations 1 and 2.

This gives a total of $N_{\text{direct}} = 10 + 52 + T_{\text{IU}} + T_2 + T_3 + T_{\text{activation_time}} + T_{\text{CSI_Reporting}} - 3 \text{ ms} = 62 + 10 + 13 + 6 + 20 + 2 - 3 = 94 \text{ ms}$ for test configuration 3.

During T3 the UE shall send valid CSI reports for PCell and SCell1 with non-zero CQI index and continue to send CSI reports for PCell and SCell1 (Cell 2) with non-zero CQI index until the end of T3.

All of the above test requirements shall be fulfilled in order for the observed SCell1 direct activation delay to be counted as correct.

A.6.5.3.6 PUCCH SCell Activation and deactivation of known SCell in FR1

A.6.5.3.6.1 Test Purpose and Environment

The purpose of this test is to verify that the PUCCH SCell activation and deactivation times are within the requirements stated in clause 8.3, when the PUCCH SCell in FR1 is known by the UE at the time of activation.

The supported test configurations are shown in table A.6.5.3.6.1-1 below. The test parameters are given in Tables A.6.5.3.6.1-2 and cell-specific parameters in A.6.5.3.6.1-3 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. Cell 1 is the PCell in primary Timing Advance Group (pTAG) and cell 2 is the PUCCH SCell in the secondary Timing Advance Group (sTAG). Before the test starts the UE is connected to Cell 1, but is not aware of Cell2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

The test consists of two sub tests. In Test 1, UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment for sTAG. In Test 2, the TimeAlignmentTimer of sTAG expires before receiving the activation command.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. The test equipment sends a MAC message for activation of the PUCCH SCell.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n , defines the start of time period T2. In Test 1, the UE shall be able to report valid CSI on for the activated PUCCH SCell on PUCCH SCell at latest in slot

$$n + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + \max((T_{\text{First_available_CSI}} + T_{\text{CSI_processing}}), 3 \cdot T_{\text{target_PL-RS}}) + T_{\text{CSI_Reporting_after}}}{\text{NR slot length}}, \text{ as defined in clause 8.3. In}$$

Test 2, the UE shall be able to report valid CSI for the activated PUCCH SCell on PUCCH SCell at latest in slot $n + \frac{T_{\text{HARQ}} + T_{\text{delay_PUCCH_SCell}}}{\text{NR slot length}}$, as defined in clause 8.3.

Any PCell interruption due to activation of PUCCH SCell shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2.

Time period T3 starts when a MAC message for deactivation of PUCCH SCell, sent from the test equipment to the UE in a slot # denoted m , is received at the UE antenna connector. The UE shall carry out deactivation of the PUCCH SCell in a slot $m + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3, and The starting point of any PCell interruption due to the deactivation shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of PUCCH SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the PUCCH SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the PUCCH SCell deactivation command is sent until CQI reporting for PUCCH SCell is discontinued.

Table A.6.5.3.6.1-1: known FR1 SCell activation test configurations

Config	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration,

Table A.6.5.3.6.1-2: General test parameters for known FR1 SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μs	0	
Time alignment error between cell2 and cell1	μs	$\leq$ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
TimeAlignmentTimer	ms	500	Test 1 and Test 2
T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	$k_1 \times \text{NR slot length}$ k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.
$T_{\text{CSI_Reporting}}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.6.5.3.6.1-3: Cell specific test parameters for known FR1 SCell activation case

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1,2	MHz	Note 7					
	Config 3		Note 7					
BW _{occupied}	Config 1,2	RB	52 ^{Note 5}					
	Config 3		106 ^{Note 6}					
Initial BWP configuration			DLBWP.0.2					
TCI state			TCI.State.0					
TRS Configuration	Config 1		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			-		
	Config 2		SR.1.1 TDD			-		
	Config 3		SR.2.1 TDD			-		
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD			-		
	Config 2		CCR.1.1 TDD			-		
	Config 3		CCR.2.1 TDD			-		
RMSI CORESET parameters	Config 1		CR.1.1 FDD			-		
	Config 2		CR.1.1 TDD			-		
	Config 3		CR.2.1 TDD			-		
OCNG Patterns	Config 1,2		OP.1 ^{Note 5}					
	Config 3,		OP.1 ^{Note 6}					
SSB Configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
CSI-RS configuration for CSI reporting (Note 8)	Config 1		CSI-RS.1.1 FDD					
	Config 2		CSI-RS.1.1 TDD					
	Config 3		CSI-RS.2.1 TDD					
SMTC configuration			SMTC.1					
reportConfigType			periodic					
reportQuantity			cri-RI-PMI-CQI					
CSI reporting periodicity for PCell	Config 1,2	slot	5			-		
	Config 3		10			-		
CSI reporting offset for PCell	Config 1,2	slot	3			-		
	Config 3		5			-		
CSI reporting periodicity for SCell	Config 1,2	slot	-			5		
	Config 3		-			10		
CSI reporting offset for SCell	Config 1,2	slot	-			2		
	Config 3		-			4		
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								

N_{oc} ^{Note2}	Config 1,2	dBm/SCS	-104
	Config 3		-101
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
SS-RSRP ^{Note3}	Config 1,2	dBm/SCS	-87
	Config 3		-84
SCH_RP ^{Note 3}		dBm/15 kHz	-87
I_o ^{Note3}	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.87
Propagation condition		-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$. Note 3: SS-RSRP, I_o and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2. Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{c,low}$, and I_o is independent of the $BW_{channel}$ configured. Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{c,low}$, and I_o is independent of the $BW_{channel}$ configured. Note 7: $N_{RB,c}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$. Note 8: On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.			

A.6.5.3.6.2 Test Requirements

In Test1, during T2 the UE shall start sending CSI reports for PUCCH SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ} + T_{activation_time} + \max((T_{First_available_CSI} + T_{CSI_processing}), 3 * T_{target_PL-RS}) + T_{CSI_Reporting_after}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstSSB} +$

5ms, as defined in clause 8.3. In Test2, during T2 the UE shall start sending CSI reports for PUCCH SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ} + T_{delay_PUCCH_SCell}}{NR\ slot\ length}$, $T_{activation_time} = T_{FirstSSB} + 5ms$, as defined in clause 8.3.

During T3 the UE shall stop sending CSI reports for PUCCH SCell at latest in a slot $m + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During T2 interruption of PCell / PSCell during PUCCH SCell activation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ} + 3ms + T_X}{NR\ slot\ length} + N_{interruption}$, as defined in clause 8.3.

During T3 the starting point of interruption of PCell during PUCCH SCell deactivation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $m + 1 + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

The interruption on any activated serving cell shall not be more than the values specified for SA in clause 8.2.2.2.18.

All of the above test requirements shall be fulfilled in order for the observed PUCCH SCell activation delay and PUCCH SCell deactivation delay to be counted as correct. The rate of correct observed PUCCH SCell activation delay and PUCCH SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in slot $n + \frac{T_{HARQ} + T_{activation_time} + \max((T_{First_available_CSI} + T_{CSI_processing}), 3 * T_{target_PL-RS}) + T_{CSI_Reporting_after}}{NR\ slot\ length}$ in Test 1 or in slot $n + \frac{T_{HARQ} + T_{delay_PUCCH_SCell}}{NR\ slot\ length}$ in Test 2 as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.6.5.3.7 SCell Activation and deactivation of unknown SCell in FR1 in non-DRX

A.6.5.3.7.1 Test Purpose and Environment

The purpose of this test is to verify that the PUCCH SCell activation and deactivation times are within the requirements stated in clause 8.3, when the PUCCH SCell in FR1 is unknown by the UE at the time of activation. In this test, UE shall support cross PUCCH group CSI reporting capability *csi-ReportingCrossPUCCH-Grp-r16*.

The supported test configurations are shown in Table A.6.5.3.7.1-1 below. The test parameters are given in Table A.6.5.3.7.1-2 and cell-specific parameters in Table A.6.5.3.7.1-3 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two NR carriers, each with one cell. Cell 1 is the PCell in primary Timing Advance Group (pTAG) and Cell 2 is the PUCCH SCell in the secondary Timing Advance Group (sTAG). Both cells have constant signal levels throughout the test.

There are two sub tests in this section.

For Test 1 (valid TA case), UE is provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment for sTAG.

For Test 2 (invalid TA case), TimeAlignmentTimer of sTAG expires before UE receives the activation command

Before the test starts the UE is connected to PCell, but is not aware of PUCCH SCell. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell becomes configured on NR. During T1 the PUCCH SCell is powered off and UE is not aware of PUCCH SCell.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n, defines the start of time period T2. The UE shall be able to report valid CSI on PUCCH SCell for the activated PUCCH SCell at latest in

slot $n + \frac{T_{HARQ} + T_{activation_time} + \max((T_{First_available_CSI} + T_{CSI_processing}), 3 * T_{target_PL-RS}) + T_{CSI_Reporting_after}}{NR\ slot\ length}$ for Test 1, or

slot $n + \frac{T_{HARQ} + T_{delay_PUCCH_SCell}}{NR\ slot\ length}$ for Test 2

Note: $T_{delay_PUCCH_SCell} = T_{activation_time} + \max((T_{First_available_CSI} + T_{CSI_processing}), (T1+T2+T3), 3 * T_{target_PL-RS}) + T_{CSI_reporting_after}$, as defined in clause 8.3,

Any PCell interruption due to activation of PUCCH SCell shall occur in the slot $n + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ} + 3ms + T_X}{NR\ slot\ length} + N_{interruption}$, as defined in clause 8.3, where $N_{interruption}$ is the interruption length given in clause 8.2.

Time period T3 starts when a MAC message for deactivation of PUCCH SCell, sent from the test equipment to the UE in a slot # denoted m, is received at the UE antenna connector. The UE shall carry out deactivation of the PUCCH SCell in a slot $m + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3, and the starting point of any PCell interruption

due to the deactivation shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of PUCCH SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the PUCCH SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the PUCCH SCell deactivation command is sent until CQI reporting for PUCCH SCell is discontinued.

Table A.6.5.3.7.1-1: unknown FR1 PUCCH SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth (BW_{channel}) defined in each test configuration,	

Table A.6.5.3.7.1-2: General test parameters for unknown FR1 PUCCH SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated PUCCH secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μs	0	
Time alignment error between cell2 and cell1	μs	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
TimeAlignmentTimer	ms	500	Identify the whether TA information is valid or not
T1	s	[7]	During this time the PCell shall be known and the PUCCH SCell configured and detected.
T2	s	[1]	During this time the UE shall activate the PUCCH SCell.
T3	s	[1]	During this time the UE shall deactivate the PUCCH SCell.

T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	$k_1 \times \text{NR slot length}$ k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.
$T_{\text{CSI_Reporting}}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.6.5.3.7.1-3: Cell specific test parameters for unknown FR1 PUCCH SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1,2	MHz	Note 7					
	Config 3		Note 7					
BW _{occupied}	Config 1,2	RB	52 ^{Note 5}					
	Config 3		106 ^{Note 6}					
Initial BWP configuration			DLBWP.0.2					
TCI state			TCI.State.0					
TRS Configuration	Config 1		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			SR.1.1 FDD		
	Config 2		SR.1.1 TDD			SR.1.1 TDD		
	Config 3		SR.2.1 TDD			SR.2.1 TDD		
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD			CCR.1.1 FDD		
	Config 2		CCR.1.1 TDD			CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD			CCR.2.1 TDD		
RMSI CORESET parameters	Config 1		CR.1.1 FDD			N/A		
	Config 2		CR.1.1 TDD			N/A		
	Config 3		CR.2.1 TDD			N/A		
OCNG Patterns	Config 1,2		OP.1 ^{Note 5}					
	Config 3,		OP.1 ^{Note 6}					
SSB Configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
CSI-RS configuration for CSI reporting (Note 8)	Config 1		CSI-RS.1.1 FDD					
	Config 2		CSI-RS.1.1 TDD					
	Config 3		CSI-RS.2.1 TDD					
SMTC configuration			SMTC.1					
reportConfigType			periodic					
reportQuantity			cri-RI-PMI-CQI					
CSI reporting (CQI index non 0) periodicity for PUCCH SCell	Config 1,2	slot	N/A			5		
	Config 3		N/A			10		

CSI reporting (CQI index non 0) offset for PUCCH SCell	Config 1,2	slot	N/A	4		
	Config 3		N/A	6		
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	Config 1,2	dBm/SCS	-104	N/A	-104	-104
	Config 3		-101	N/A	-101	-101
$\hat{E}_s/I_{ot}$		dB	17	- infinity	17	17
$\hat{E}_s/N_{oc}$		dB	17	- infinity	17	17
SS-RSRP ^{Note3}	Config 1,2	dBm/SCS	-87	- infinity	-87	-87
	Config 3		-84	- infinity	-84	-84
SCH_RP ^{Note 3}		dBm/15 kHz	-87	N/A	-87	-87
I_0 ^{Note3}	Config 1,2	dBm/ 9.36MHz	-58.96	N/A	-58.96	-58.96
	Config 3	dBm/ 38.16MHz	-52.87	N/A	-52.87	-52.87
Propagation condition		-	AWGN	N/A	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.						
Note 3: SS-RSRP, I_0 and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.						
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I_0 is independent of the $BW_{channel}$ configured.						
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I_0 is independent of the $BW_{channel}$ configured.						
Note 7: $N_{RB,C}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.						
Note 8: On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.						

A.6.5.3.7.2 Test Requirements

During T2, as defined in clause 8.3, the UE shall start sending CSI reports for PUCCH SCell on PUCCH SCell with non-zero CQI index at latest in

$$\text{a slot } n + \frac{T_{HARQ} + T_{activation_time} + \max((T_{First_available_CSI} + T_{CSI_processing}), 3 * T_{target_PL-RS}) + T_{CSI_Reporting_after}}{NR \text{ slot length}} \text{ for Test 1.}$$

$$T_{activation_time} = T_{FirstSSB_MAX} + T_{SMTc_MAX} + 2 * T_{Ts} + 5ms.$$

$$\text{a slot } n + \frac{T_{HARQ} + T_{delay_PUCCH_SCell}}{NR \text{ slot length}} \text{ for Test 2.}$$

During T3 the UE shall stop sending CSI reports for PUCCH SCell at latest in a slot $m + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

During T2 interruption of PCell during PUCCH SCell activation shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3.

During T3 the starting point of interruption of PCell during PUCCH SCell deactivation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

The interruption on any activated serving cell shall not be more than the values specified for SA in clause 8.2.2.2.18.

All of the above test requirements shall be fulfilled in order for the observed PUCCH SCell activation delay and PUCCH SCell deactivation delay to be counted as correct. The rate of correct observed PUCCH SCell activation delay and PUCCH SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $n + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + \max((T_{\text{First_available_CSI}} + T_{\text{CSI_processing}}), 3 * T_{\text{target_PL-RS}}) + T_{\text{CSI_Reporting_after}}}{\text{NR slot length}}$ and in a slot $n + \frac{T_{\text{HARQ}} + T_{\text{delay_PUCCH_SCell}}}{\text{NR slot length}}$ for Test 1 and Test 2, respectively, as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.6.5.3.8 SCell Activation and Deactivation of one FR1 known PUCCH SCell and one FR1 unknown SCell with single activation/deactivation command

A.6.5.3.8.1 Test Purpose and Environment

The purpose of this test is to verify the SCell activation and deactivation delay requirements for PUCCH SCell with multiple SCells specified in clause 8.3.13 and 8.3.15, when one configured deactivated known PUCCH SCells in FR1 and one configured unknown SCell in FR1 by the UE at the time of activation.

The supported test configurations are defined in table A.6.5.3.8.1-1 below. The test parameters are given in table A.6.5.3.8.1-2 and cell-specific parameters in A.6.5.3.8.1-3 below.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three NR carriers. All Cells has constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCC), but is not aware of Cell 2 (PUCCH SCell) and Cell 3(SCell). The UE is monitoring the Cell 1 (PCC). The UE shall be continuously scheduled in the Cell 1 throughout the whole test. PCC, SCC of Cell 2 and SCC of Cell3 are on different FR1 bands.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell 2) and SCell (Cell 3) become configured on radio channel 2 and 3 respectively.

A MAC message for activation of UCCH SCell (Cell 2) and SCell (Cell 3) is sent by the test equipment 100ms after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of PUCCH SCell (Cell 2) and SCell (Cell 3) is received at the UE antenna connector defines the start of time period T2.

Immediately at beginning of T2 the transmission power of Cell 2 and Cell 3 are increased to same level as for Cell 1. The UE shall be able to report valid CSI on PCell for the activated PUCCH SCell (Cell 2) at latest in slot $m + \frac{T_{\text{HARQ}} + T_{\text{delay_multiple_SCells_PUCCH_SCell}}}{\text{NR slot length}}$ and be able to report valid CSI on PCell for the activated SCell (Cell 3) at latest in slot $m + \frac{T_{\text{HARQ}} + T_{\text{delay_multiple_SCells_other_SCell}}}{\text{NR slot length}}$ as defined in clause 8.3.13 provided the PUCCH SCell can be successfully detected on the first attempt.

For Cell 2 activation, the UE shall start reporting CSI in PCell in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the PUCCH SCell activation has been completed. For Cell 3 activation, the UE shall start reporting CSI in PCell in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the DL SCell activation has been completed.

Any PCell interruption due to activation of SCells (including one SCell configured with PUCCH) shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in section 8.2.

Time period T3 starts when a MAC message for deactivation of the SCells (Cell 2 and Cell 3), sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector. The UE shall carry out deactivation of the SCells (Cell 2 and Cell 3) at latest in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ as defined in clause 8.3. The starting point of PCell interruption due to the deactivation shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of PUCCH SCell and DL SCell, respectively.

The test equipment verifies the PUCCH SCell activation time by counting the slots from the time when the PUCCH SCell activation command is sent until a CSI report with other than CQI index 0 is received. The test equipment verifies the DL SCell activation time by counting the slots from the time when the DL SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the PUCCH SCell deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for PUCCH SCell is discontinued. The test equipment verifies the DL SCell deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for DL SCell is discontinued.

Table A.6.5.3.8.1-1: Supported test configurations

Configuration	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth (BW_{channel}) defined in each test configuration,

Table A.6.5.3.8.1-2: General test parameters for unknown FR1 SCell activation case with 2 deactivated SCells, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	Three NR radio channel (1, 2, 3) are used for this test
Active Cell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated PUCCH SCell		Cell 2	Configured deactivated PUCCH SCell on NR RF channel number 2 which is an inter-band CC to PCC of Cell 1;
Configured deactivated SCell		Cell 3	Configured deactivated SCell on NR RF channel number 3 which is an inter-band CC to PCC of Cell 1 and SCC of Cell2

CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell2 timing offset to cell1	μs	0	
Cell3 timing offset to cell1	μs	0	
Time alignment error between cell2 and cell1	μs	$\leq$ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
Time alignment error between cell3 and cell1	μs	$\leq$ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
SCell measurement cycle (measCycleSCell)	ms	160	
T1	ms	100	During this time the PSCell shall be known and the SCell configured, but not detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	$k_1 \text{NR slot length}$	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by <i>dl-DataToUL-ACK</i> if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
$T_{\text{CSI_Reporting}}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe}, \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.6.5.3.8.1-3: Cell specific test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 3		Cell 4	
			T2	T3	T2	T3
SSB ARFCN			Freq2		Freq3	
Duplex mode	Config 1,4		FDD			
	Config 2,3,5,6		TDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2,5		TDDConf.1.1			
	Config 3,6		TDDConf.2.1			
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52			
	Config 2,5		10: N _{RB,c} = 52			
	Config 3,6		40: N _{RB,c} = 106			
DL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.0.1			
DL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		DLBWP.1.1			

UL initial BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4, 5, 6		ULBWP.1.1	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	SR.1.1 FDD
	Config 2,5		SR.1.1 TDD	SR.1.1 TDD
	Config 3,6		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	CR.1.1 FDD
	Config 2,5		CR.1.1 TDD	CR.1.1 TDD
	Config 3,6		CR.2.1 TDD	CR.2.1 TDD
RMC CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	CCR.1.1 FDD
	Config 2,5		CCR.1.1 TDD	CCR.1.1 TDD
	Config 3,6		CCR.2.1 TDD	CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD	TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD	TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD	TRS.1.2 TDD
OCNG Patterns			OP.1	
SMTC configuration			SMTC.1	
SSB configuration	Config 1,2,4,5		SSB.1 FR1	
	Config 3,6		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5	kHz	15 kHz	
	Config 3,6		30kHz	
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	
	Config 2,5		CSI-RS.1.1 TDD	
	Config 3,6		CSI-RS.2.1 TDD	
reportConfigType	Config 1-6		periodic	
reportQuantity	Config 1-6		cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2,4,5	slot	5	N/A
CSI reporting offset	Config 3,6	slot	10	N/A
	Config 1,2,4,5		2	N/A
	Config 3,6		4	N/A
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2		dBm/15kHz	-104	
N_{oc} Note2	Config 1,2,4,5	dBm/SCS	-104	
	Config 3,6		-101	
$\hat{E}_s/I_{ot}$		dB	17	
$\hat{E}_s/N_{oc}$		dB	17	
SS-RSRP ^{Note3}	Config 1,2,4,5	dBm/SCS	-87	
	Config 3,6		-84	
SCH _{RP} ^{Note 3}		dBm/15 kHz	-87	
Propagation condition		-	AWGN	
I_0 ^{Note3}	Config 1,2,4,5	dBm/9.36MHz	-58.96	

	Config 3,6	dBm/ 38.16MHz	-52.87
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.		
Note 3:	SS-RSRP, I_o and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.]		
Note 5:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.		
Note 6:	All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.		
Note 7:	$N_{RB,c}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.		

A.6.5.3.8.2 Test Requirements

During T2, the UE shall send the first CSI report for SCell in the first available uplink resource after slot $(m+k)$. UE is allowed to postpone CSI report to next available uplink resource if an available uplink resource is subject to interruption. Whether CSI report in slot $(m+k)$ was interrupted is checked by monitoring ACK/NACK sent in PCell in slot $(m+k)$. And the UE shall be able to report valid CSI for the activated PUCCH SCell (Cell 2) at latest in slot $m + \frac{T_{HARQ} + T_{delay_multiple_SCells_PUCCH_SCell}}{NR\ slot\ length}$ and report valid CSI for the activated SCell (Cell 3) at latest in slot $m + \frac{T_{HARQ} + T_{delay_multiple_SCells_other_SCell}}{NR\ slot\ length}$ as defined in clause 8.3.13. And the PCell interruption due to activation of SCells (including one SCell configured with PUCCH) shall occur in the slot $m + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to slot $m + 1 + \frac{T_{HARQ} + 3ms + T_X}{NR\ slot\ length} + N_{interruption}$, as defined in clause 8.3, where $N_{interruption}$ is the interruption length given in section 8.2.

During T3, the UE shall carry out deactivation of the the SCells (including one SCell configured with PUCCH) at latest in slot $n + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$ as defined in clause 8.3. And the starting point of PCell interruption due to the deactivation shall occur in the slot $n + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

A.6.5.3.9 SCell Activation and deactivation of unknown PUCCH SCell and unknown DL SCell in FR1 in non-DRX

A.6.5.3.9.1 Test Purpose and Environment

The purpose of this test is to verify that the PUCCH SCell and DL SCell activation and deactivation times are within the requirements stated in clause 8.3.13 and clause 8.3.15, when the PUCCH SCell in FR1 and DL SCell in FR1 are unknown to the UE at the time of activation.

The supported test configurations are shown in table A.6.5.3.9.1-1 below. The test parameters are given in Tables A.6.5.3.9.1-2 and cell-specific parameters in A.6.5.3.9.1-3 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three NR carriers, each with one cell. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1, but is not aware of Cell2 (PUCCH SCell) and Cell3(DL SCell). The UE is only monitoring the PCC. The UE shall be continuously scheduled

in the PCell throughout the whole test. PCC, SCC of Cell 2 and SCC of Cell 3 are on different bands. The primary PUCCH group contain Cell1 and the secondary PUCCH group contains Cell2 and Cell3.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell 2) and DL SCell (Cell 3) becomes configured on radio channel 2 and 3 respectively. The UE starts monitoring the SCC1(Cell 2 CC) and SCC2(Cell 3 CC). The test equipment sends a MAC message for activation of the PUCCH SCell and DL SCell simultaneously.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n, defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated PUCCH SCell at latest in slot $n + \frac{T_{HARQ} + T_{delay_multiple_SCells_PUCCH_SCell}}{NR\ slot\ length}$, and report valid CSI in PCell for the activated DL SCell at latest in slot $n + \frac{T_{HARQ} + T_{delay_multiple_SCells_other_SCell}}{NR\ slot\ length}$, as defined in clause 8.3.13. In this test case, both valid TA and invalid TA cases shall be tested.

Test for case when UE has valid TA: the *TimeAlignmentTimer* [2] associated with the TAG containing the PUCCH SCell is running, and $T_{delay_multiple_SCells_PUCCH_SCell} = T_{activation_time_multiple_scells} + \max((T_{First_available_CSI} + T_{CSI_processing}), 3 \cdot T_{target_PL-RS}) + T_{CSI_reporting_after}$.

Test for case when UE do not have valid TA: $T_{delay_multiple_SCells_PUCCH_SCell} = T_{activation_time_multiple_scells} + \max((T_{First_available_CSI} + T_{CSI_processing}), (T1+T2+T3), 3 \cdot T_{target_PL-RS}) + T_{CSI_reporting_after}$.

$T_{delay_multiple_SCells_other_SCell} = T_{activation_time_multiple_scells} + T_{CSI_Reporting}$.

$T_{activation_time_multiple_scells}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario as specified in section 8.3.7

For Cell2 activation, the UE shall start reporting CSI in PCell in slot $n + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$ and shall report CQI index 0 (out-of-range) until the PUCCH SCell activation has been completed. For Cell3 activation, the UE shall start reporting CSI in PCell in slot $n + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$ and shall report CQI index 0 (out-of-range) until the DL SCell activation has been completed.

Any PCell interruption due to activation of PUCCH SCell or DL SCell shall occur in the slot $n + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ} + 3ms + T_X}{NR\ slot\ length} + N_{interruption}$, as defined in clause 8.3.13, where $N_{interruption}$ is the interruption length given in clause 8.2.2.2.7.

Time period T3 starts when a MAC message for deactivation of PUCCH SCell and DL SCell, sent from the test equipment to the UE in a slot # denoted m, is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot $m + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.15, and the starting point of any PCell interruption due to the deactivation shall occur in the slot $m + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $m + 1 + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.15.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of PUCCH SCell and DL SCell, respectively.

The test equipment verifies the PUCCH SCell activation time by counting the slots from the time when the PUCCH SCell activation command is sent until a CSI report with other than CQI index 0 is received. The test equipment verifies the DL SCell activation time by counting the slots from the time when the DL SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the PUCCH SCell deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for PUCCH SCell is discontinued. The test equipment verifies the

DL SCell deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for DL SCell is discontinued.

Table A.6.5.3.9.1-1: unknown FR1 PUCCH SCell and DL SCell activation test configurations

Config	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode, for both PUCCH SCell and DL SCell
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode, for both PUCCH SCell and DL SCell
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode, for both PUCCH SCell and DL SCell
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration	

Table A.6.5.3.9.1-2: General test parameters for unknown FR1 PUCCH SCell and DL SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	Three NR radio channel (1, 2, 3) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated PUCCH SCell		Cell 2	Configured deactivated PUCCH secondary cell on NR RF channel number 2
Configured deactivated DL SCell		Cell 3	Configured deactivated DL secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	For both cell 2 and cell 3
Cell2/Cell 3 timing offset to cell1	μs	0	
Time alignment error between cell2 and cell1; cell3 and cell1; cell3 and cell2	μs	$\leq$ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	0.1	During this time the PCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	$k_1 \times \text{NR slot length}$ k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.

T _{CSI_Reporting}	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
----------------------------	----	----	---

Table A.6.5.3.9.1-3: Cell specific test parameters for unknown FR1 PUCCH SCell and DL SCell activation case

Parameter		Unit	Cell 1			Cell 2 and Cell 3		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1,2	MHz	Note 7					
	Config 3		Note 7					
BW _{occupied}	Config 1,2	RB	52 ^{Note 5}					
	Config 3		106 ^{Note 6}					
Initial BWP configuration			DLBWP.0.2					
TCI state			TCI.State.0					
TRS Configuration	Config 1		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			-		
	Config 2		SR.1.1 TDD			-		
	Config 3		SR.2.1 TDD			-		
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD			-		
	Config 2		CCR.1.1 TDD			-		
	Config 3		CCR.2.1 TDD			-		
RMSI CORESET parameters	Config 1		CR.1.1 FDD			-		
	Config 2		CR.1.1 TDD			-		
	Config 3		CR.2.1 TDD			-		
OCNG Patterns	Config 1,2		OP.1 ^{Note 5}					
	Config 3,		OP.1 ^{Note 6}					
SSB Configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
CSI-RS configuration for CSI reporting (Note 8)	Config 1		CSI-RS.1.1 FDD					
	Config 2		CSI-RS.1.1 TDD					
	Config 3		CSI-RS.2.1 TDD					
SMTC configuration			SMTC.1					
reportConfigType			periodic					
reportQuantity			cri-RI-PMI-CQI					
CSI reporting periodicity for PCell	Config 1,2	slot	5			-		
	Config 3		10			-		
CSI reporting offset for PCell	Config 1,2	slot	3			-		
	Config 3		5			-		
CSI reporting periodicity for SCell	Config 1,2	slot	-			5		
	Config 3		-			10		
CSI reporting offset for SCell	Config 1,2	slot	-			2		
	Config 3		-			4		
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								

EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} ^{Note2}	Config 1,2	dBm/SCS	-104
	Config 3		-101
$\hat{E}_s / I_{ot}$		dB	17
$\hat{E}_s / N_{oc}$		dB	17
SS-RSRP ^{Note3}	Config 1,2	dBm/SCS	-87
	Config 3		-84
SCH_RP ^{Note 3}		dBm/15 kHz	-87
I_o ^{Note3}	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.87
Propagation condition		-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.			
Note 3: SS-RSRP, I_o and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.			
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.			
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.			
Note 7: $N_{RB,c}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.			
Note 8: On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.			

A.6.5.3.9.2 Test Requirements

The test requirements defined in clause A.6.5.3.8.2 shall apply to this test case.

A.6.5.3.10 Fast SCell Activation of known SCell in FR1 in non-DRX for 160ms SCell measurement cycle

A.6.5.3.10.1 Test Purpose and Environment

The purpose of this test is to verify that the fast SCell activation and deactivation times are within the requirements stated in clause 8.3.16, when the SCell in FR1 is known by the UE at the time of activation.

The supported test configurations are shown in table A.6.5.3.10.1-1 below. The test parameters are given in Tables A.6.5.3.10.1-2 and cell-specific parameters in A.6.5.3.10.1-3 below. The test consists of two successive time periods, with duration of T1 and T2, respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1, but is not aware of

Cell2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. The test equipment sends a MAC message for activation of the SCell and triggering the aperiodic CSI-RS for fast SCell activation.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n (where n mode 20=1), defines the start of time period T2. The UE shall be able to report valid CSI in PCell for the activated SCell at latest in slot $n + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, as defined in clause 8.3. The UE shall start reporting CSI in PCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption due to activation of SCell shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

Table A.6.5.3.10.1-1: known FR1 SCell activation in non-DRX for 160ms SCell measurement cycle supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration,

Table A.6.5.3.10.1-2: General test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μs	0	
Time alignment error between cell2 and cell1	μs	$\leq$ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.

A3-offset	dB	-15	
T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	$k_1 \times \text{NR slot length}$ k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.
$T_{\text{CSI_Reporting}}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.6.5.3.10.1-3: Cell specific test parameters for known FR1 SCell activation case, 160ms SCell measurement cycle

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW_{channel}	Config 1,2	MHz	Note 7			
	Config 3		Note 7			
BW_{occupied}	Config 1,2	RB	52 ^{Note 5}			
	Config 3		106 ^{Note 6}			
Initial BWP configuration			DLBWP.0.2			
TCI state			TCI.State.0			
TRS Configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD		-	
	Config 2		SR.1.1 TDD		-	
	Config 3		SR.2.1 TDD		-	
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD		-	
	Config 2		CCR.1.1 TDD		-	
	Config 3		CCR.2.1 TDD		-	
RMSI CORESET parameters	Config 1		CR.1.1 FDD		-	
	Config 2		CR.1.1 TDD		-	
	Config 3		CR.2.1 TDD		-	
OCNG Patterns	Config 1,2		OP.1 ^{Note 5}			
	Config 3,		OP.1 ^{Note 6}			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
Aperiodic CSI-RS for SCell activation	Config 1		N/A		TRS.1.3 FDD	
	Config 2		N/A		TRS.1.3 TDD	
	Config 3		N/A		TRS.1.4 TDD	
gapBetweenBursts		slots	N/A			
CSI-RS configuration for CSI reporting (Note 8)	Config 1		CSI-RS.1.1 FDD			
	Config 2		CSI-RS.1.1 TDD			
	Config 3		CSI-RS.2.1 TDD			
SMTC configuration			SMTC.1			
reportConfigType			periodic			

reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity for PCell	Config 1,2	slot	5	-
	Config 3		10	-
CSI reporting offset for PCell	Config 1,2	slot	3	-
	Config 3		5	-
CSI reporting periodicity for SCell	Config 1,2	slot	-	5
	Config 3		-	10
CSI reporting offset for SCell	Config 1,2	slot	-	2
	Config 3		-	4
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note2}	Config 1,2	dBm/SCS	-104	
	Config 3		-101	
$\hat{E}_s / I_{ot}$		dB	17	
$\hat{E}_s / N_{oc}$		dB	17	
SS-RSRP ^{Note3}	Config 1,2	dBm/SCS	-87	
	Config 3		-84	
CSI-RSRP ^{Note3}	Config 1,2	dBm/SCS		-87
	Config 3			-84
SCH_RP ^{Note 3}		dBm/15 kHz	-87	
I_o ^{Note3}	Config 1,2	dBm/ 9.36MHz	-58.96	
	Config 3	dBm/ 38.16MHz	-52.87	
Propagation condition		-	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.				
Note 3: SS-RSRP, CSI-RSRP, I_o and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.				
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{c,low}$, and I_o is independent of the $BW_{channel}$ configured.				
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{c,low}$, and I_o is independent of the $BW_{channel}$ configured.				
Note 7: $N_{RB,c}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.				
Note 8: On top of the reference configurations, CSI-RS offset should be set to meet the CSI reference resource timing definition in TS 38.214 cl. 5.2.2.5.				

A.6.5.3.10.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $(n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}})$. UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $n + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, $T_{\text{activation_time}} = T_{\text{FirstATRS}} + 5\text{ms}$, as defined in clause 8.3.16.

During T2 interruption of PCell / PSCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3.16.

The interruption on any activated serving cell shall not be more than the values specified for SA in clause 8.2.2.2.2.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $\frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.6.5.3.11 SCell Activation of known SCell in FR1 in non-DRX for 640 ms SCell measurement cycle

A.6.5.3.11.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.6.5.3.10.1. The supported test configurations are the same as defined in clause A.6.5.3.10.1. The test parameters are the same except those described in the following clause. The listed parameter values in Table A.6.5.3.11.1-1 will replace the values of corresponding parameters in Tables A.6.5.3.10.1-2 and the listed parameter values in Table A.6.5.3.11.1-2 will replace the values of corresponding parameters in Tables A.6.5.3.10.1-3.

Table A.6.5.3.11.1-1: General test parameters for known FR1 SCell activation case, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

Table A.6.5.3.11.1-2: Cell specific test parameters for known FR1 SCell activation case, 640ms SCell measurement cycle

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
gapBetweenBursts	slots	2			

A.6.5.3.11.2 Test Requirements

The test requirements defined in clause A.6.5.3.10.2 shall apply to this test case, except $T_{\text{activation_time}}$ will be replaced with the value $T_{\text{FirstATRS}} + T_{\text{gap}} + T_{\text{ATRS}} + 5\text{ms}$.

A.6.5.4 UE UL carrier RRC reconfiguration Delay

A.6.5.4.1 UE UL carrier RRC reconfiguration Delay

Table A.6.5.4.1-1 - Table A.6.5.4.1-4 : Void

A.6.5.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that when the UE receives a RRC message implying NR UL or Supplementary UL carrier configuration, the UE shall be ready to start transmission on the newly configured carrier within the time limits specified in clause 8.4.2 and 8.4.3 for configuring and deconfiguring, respectively.

There are two cells: FR1 PCell (cell 1) and FR1 SCell (cell 2). Both NR uplink and supplementary uplink are broadcast by *ServingCellConfigCommonSIB*. The test parameters for PCell and SCell are given in Table A.6.5.4.1.1-1, Table A.6.5.4.1.1-2, Table A.6.5.4.1.1-3 and Table A.6.5.4.1.1-4 below. The test consists of three time periods, with duration of T1, T2 and T3 respectively. During time duration T1, NR uplink of cell 2 is configured to UE. At the start of T2, a supplementary uplink of cell 2 is configured to UE through *RRCReconfiguration*, then UE shall start transmission on the supplementary uplink. At the start of T3, the supplementary uplink is released through *RRCReconfiguration*.

Table A.6.5.4.1.1-1: Supported test configurations

Configuration	PCell (Cell 1)	SCell (Cell 2)
1	15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode	DL and UL: 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode; SUL: 15 kHz SCS, ≥ 10 MHz bandwidth, SUL duplex mode
2	15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode	DL and UL: 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode; SUL: 15 kHz SCS, ≥ 10 MHz bandwidth, SUL duplex mode
3	15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode	DL and UL: 30kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥ 40 MHz bandwidth, SUL duplex mode
4	15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode	DL and UL: 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode; SUL: 15 kHz SCS, ≥ 10 MHz bandwidth, SUL duplex mode
5	15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode	DL and UL: 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode; SUL: 15 kHz SCS, ≥ 10 MHz bandwidth, SUL duplex mode
6	15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode	DL and UL: 30kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode; SUL: 30kHz SCS, ≥ 40 MHz bandwidth, SUL duplex mode
7	30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode	DL and UL: 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode; SUL: 15 kHz SCS, ≥ 10 MHz bandwidth, SUL duplex mode
8	30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode	DL and UL: 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode; SUL: 15 kHz SCS, ≥ 10 MHz bandwidth, SUL duplex mode
9	30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode	DL and UL: 30kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode;

		SUL: 30kHz SCS, ≥40 MHz bandwidth, SUL duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations	
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth (BW_{channel}) defined in each test configuration,	

Table A.6.5.4.1.1-2: General test parameters for NR standalone UE UL carrier RRC reconfiguration Delay on Pcell

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1,2,3, 4, 5, 6, 7, 8, 9	1, 2	Two radio channels are used for this test.
Active cell		Config 1,2,3, 4, 5, 6, 7, 8, 9	Cell 1: FR1 PCell Cell 2: FR1 SCell	PCell on RF channel number 1 FR1 SCell on RF channel number 2
CP length		Config 1,2,3, 4, 5, 6, 7, 8, 9	Normal	
DRX		Config 1,2,3, 4, 5, 6, 7, 8, 9	OFF	
Measurement gap pattern Id		Config 1,2,3, 4, 5, 6, 7, 8, 9	OFF	
Filter coefficient		Config 1,2,3, 4, 5, 6, 7, 8, 9	0	L3 filtering is not used
T1	s	Config 1,2,3, 4, 5, 6, 7, 8, 9	5	
T2	s	Config 1,2,3, 4, 5, 6, 7, 8, 9	5	
T3	s	Config 1,2,3, 4, 5, 6, 7, 8, 9	5	

Table A.6.5.4.1.1-3: NR Cell specific test parameters for NR standalone UE UL carrier RRC reconfiguration Delay on PCell (Cell 1)

Parameter	Unit	Test Configuration	Test 1		
			T1	T2	T3
Channel number		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	1		
TDD configuration		Conf 1, 2, 3	N/A		
		Conf 4, 5, 6	TDD Conf.1.1		
		Conf 7, 8, 9	TDD Conf.2.1		
BW _{channel}	MHz	Conf 1, 2, 3	Note 6		
		Conf 4, 5, 6	Note 6		
		Conf 7, 8, 9	Note 6		
BW _{occupied}	RB	Conf 1, 2, 3	52 ^{Note 4}		
		Conf 4, 5, 6	52 ^{Note 4}		
		Conf 7, 8, 9	106 ^{Note 5}		
PDSCH reference measurement channel as defined in A.3.1.1		Conf 1, 2, 3	SR.1.1 FDD		
		Conf 4, 5, 6	SR.1.1 TDD		
		Conf 7, 8, 9	SR 2.1 TDD		
RMSI CORESET reference measurement channel as defined in A.3.1.2		Conf 1, 2, 3	CR.1.1 FDD		
		Conf 4, 5, 6	CR.1.1 TDD		
		Conf 7, 8, 9	CR.2.1 TDD		
RMC CORESET reference measurement channel as defined in A.3.1.3		Conf 1, 2, 3	CCR.1.1 FDD		
		Conf 4, 5, 6	CCR.1.1 TDD		
		Conf 7, 8, 9	CCR.2.1 TDD		
OCNG Pattern ^{Note 1}		Conf 1, 2, 3, 4, 5, 6	OP.1 ^{Note 4}		
		Conf 7, 8, 9	OP.1 ^{Note 5}		
SSB configuration		Conf 1, 2, 3, 4, 5, 6	SSB.1 FR1		
		Conf 7, 8, 9	SSB.2 FR1		
SMTc configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	SMTc.1		
CSI-RS for tracking		Conf 1	TRS.1.1 FDD		
		Conf 2	TRS.1.1 FDD		
		Conf 3	TRS.1.1 FDD		
		Conf 4	TRS.1.1 TDD		
		Conf 5	TRS.1.1 TDD		
		Conf 6	TRS.1.1 TDD		
		Conf 7	TRS.1.2 TDD		
		Conf 8	TRS.1.2 TDD		
		Conf 9	TRS.1.2 TDD		
DL initial BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.0.1		
DL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.1.1		
UL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	ULBWP.1.1		
EPRE ratio of PSS to SSS	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	0		
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					

EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} Note 2	dBm / 15kHz	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	-102		
	dBm/SCS	Conf 1,2,3,4,5,6	-102		
		Conf 7,8,9	-99		
$\hat{E}_s/N_{oc}$	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16
$\hat{E}_s/I_{ot}$ Note 3	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16
SS-RSRP Note 3	dBm/SCS	Conf 1,2,3,4,5,6	-86	-86	-86
		Conf 7,8,9	-83	-83	-83
I_o Note 3	dBm/ 9.36 MHz	Conf 1,2,3,4,5,6	-57.9	-57.9	-57.9
	dBm/ 38.16 MHz	Conf 7,8,9	-51.8	-51.8	-51.8
Propagation Condition		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	AWGN		
Antenna configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	1 x 2		
NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.					
NOTE 3: $\hat{E}_s/I_{ot}$, I_o , and SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
NOTE 4: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.					
NOTE 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.					
NOTE 6: $N_{RB,C}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.					

Table A.6.5.4.1.1-4: NR Cell specific test parameters for NR standalone UE UL carrier RRC reconfiguration Delay on SCell (Cell 2)

Parameter	Unit	Test Configuration	Test 1		
			T1	T2	T3
Channel number		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	2		
TDD configuration		Conf 1, 4, 7	N/A		
		Conf 2, 5, 8	TDDConf.1.1		
		Conf 3, 6, 9	TDDConf.2.1		
BW _{channel}	MHz	Conf 1, 4, 7	Note 6		
		Conf 2, 5, 8	Note 6		
		Conf 3, 6, 9	Note 6		
BW _{occupied}	RB	Conf 1, 4, 7	52 ^{Note 4}		
		Conf 2, 5, 8	52 ^{Note 4}		
		Conf 3, 6, 9	106 ^{Note 5}		
PUSCH parameters for NR UL carrier		Conf 1, 4, 7	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]
		Conf 2, 5, 8	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]	G-FR1-A3-10 in [13]
		Conf 3, 6, 9	G-FR1-A3-14 in [13]	G-FR1-A3-14 in [13]	G-FR1-A3-14 in [13]
PUCCH parameters For NR UL carrier		Conf 1, 4, 7	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]
		Conf 2, 5, 8	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]	Table 8.3.3.1.2-1 in [13]
		Conf 3, 6, 9	Table 8.3.3.1.2-2 in [13]	Table 8.3.3.1.2-2 in [13]	Table 8.3.3.1.2-2 in [13]
PUSCH parameters for supplementary UL		Conf 1, 4, 7	N/A	G-FR1-A3-10 in [13]	N/A
		Conf 2, 5, 8	N/A	G-FR1-A3-10 in [13]	N/A
		Conf 3, 6, 9	N/A	G-FR1-A3-14 in [13]	N/A
PUCCH parameters for supplementary UL		Conf 1, 4, 7	N/A	N/A	N/A
		Conf 2, 5, 8	N/A	N/A	N/A
		Conf 3, 6, 9	N/A	N/A	N/A
PDSCH reference measurement channel as defined in A.3.1.1		Conf 1, 4, 7	SR.1.1 FDD		
		Conf 2, 5, 8	SR.1.1 TDD		
		Conf 3, 6, 9	SR 2.1 TDD		
RMSI CORESET reference measurement channel as defined in A.3.1.2		Conf 1, 4, 7	CR.1.1 FDD		
		Conf 2, 5, 8	CR.1.1 TDD		
		Conf 3, 6, 9	CR.2.1 TDD		

RMC CORESET reference measurement channel as defined in A.3.1.3		Conf 1, 4, 7	CCR.1.1 FDD		
		Conf 2, 5, 8	CCR.1.1 TDD		
		Conf 3, 6, 9	CCR.2.1 TDD		
OCNG Pattern ^{Note 1}		Conf 1, 2, 4, 5, 7, 8	OP.1 ^{Note 4}		
		Conf 3, 6, 9	OP.1 ^{Note 5}		
SSB configuration		Conf 1, 2, 4, 5, 7, 8	SSB.1 FR1		
		Conf 3, 6, 9	SSB.2 FR1		
SMTC configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	SMTC.1		
CSI-RS for tracking		Conf 1	TRS.1.1 FDD		
		Conf 2	TRS.1.1 FDD		
		Conf 3	TRS.1.2 FDD		
		Conf 4	TRS.1.1 TDD		
		Conf 5	TRS.1.1 TDD		
		Conf 6	TRS.1.2 TDD		
		Conf 7	TRS.1.1 TDD		
		Conf 8	TRS.1.1 TDD		
		Conf 9	TRS.1.2 TDD		
DL initial BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.0.1		
DL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	DLBWP.1.1		
UL dedicated BWP configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	ULBWP.1.1		
EPRE ratio of PSS to SSS	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	0		
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{bc} ^{Note 2}	dBm / 15kHz	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	-102		
	dBm/SCS	Conf 1, 2, 4, 5, 7, 8	-102		
		Conf 3, 6, 9	-99		
$\hat{E}_s/N_{oc}$	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16

$\hat{E}_s/I_{ot}$ Note 3	dB	Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	16	16	16
SS-RSRP Note 3	dBm/SCS	Conf 1, 2, 4, 5, 7,8	-86	-86	-86
		Conf 3, 6, 9	-83	-83	-83
I_o Note 3	dBm/9.36 MHz	Conf 1, 2, 4, 5, 7,8	-57.9	-57.9	-57.9
	dBm/38.16 MHz	Conf 3, 6, 9	-51.8	-51.8	-51.8
Propagation Condition		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	AWGN		
Antenna configuration		Conf 1, 2, 3, 4, 5, 6, 7, 8, 9	1 x 2		
SUL RSRP threshold (rsrp-ThresholdSSB-SUL)	dBm	Conf 1,2,3,4,5,6	-75		
		Conf 7,8,9	-72		
NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{α} to be fulfilled within $BW_{occupied}$.					
NOTE 3: $\hat{E}_s/I_{ot}$, I_o , and SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
NOTE 4: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.					
NOTE 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.					
NOTE 6: $N_{RB,c}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.					

A.6.5.4.1.2 Test Requirements

The UE shall be ready to start transmission on the supplementary uplink carrier on SCell within 20ms from the start of T2.

The UE shall stop the transmission on the supplementary uplink carrier on SCell within 20ms from the start of T3.

All of the above test requirements shall be fulfilled in order for the observed UE UL carrier configuration delay and UE UL carrier release delay to be counted as correct. The rate of correct observed UE UL carrier configuration delay and UE UL carrier release delay during repeated tests shall be at least 90%.

A.6.5.4.2 Void

A.6.5.5 Beam Failure Detection and Link recovery procedures

A.6.5.5.1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode

A.6.5.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.6.5.5.1.1-1, A.6.5.5.1.1-2, A.6.5.5.1.1-3 and A.6.5.5.1.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.1.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.6.5.5.1.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.6.5.5.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.5.1.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
Active PSCell			Test 1	
RF Channel Number			Cell 1	
Duplex mode	Config 1		1	
	Config 2, 3		FDD	
			TDD	
BWchannel	Config 1	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	

RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
SSB Configuration	Config 1		SSB.3 FR1	
	Config 2		SSB.3 FR1	
	Config 3		SSB.4 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2		Table A.3.8.2.2-1	
	Config 3		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			gp0	
gapOffset			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1- 1).

rsrp-ThresholdSSB	Config 1, 2	dBm/ SCS kHz	-98	Threshold used for Q _{in_LR_SSB}
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp- ThresholdCSI- RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.37	
T3		s	0.24	
T4		s	0	
T5		s	0.17	
D1		s	0.14	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.6.5.5.1.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q ₀	Config 1	dB	5	-3	-12	-12	-12

	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
SSB_RP of set q_1	Config 1	dBm/S CS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.							
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.							

Table A.6.5.5.1.1-4: Void

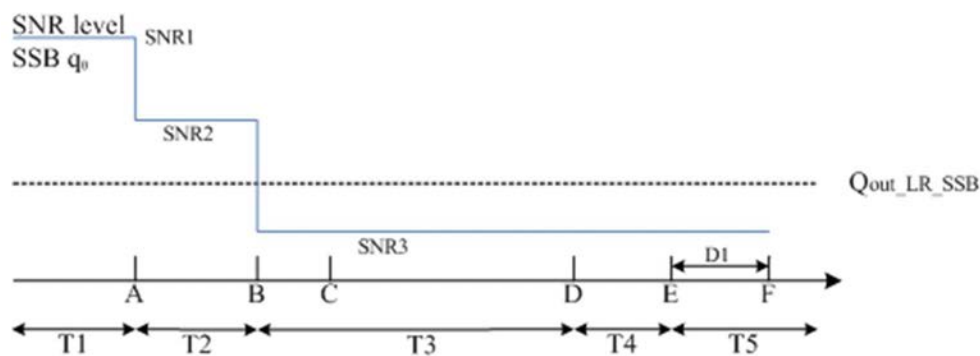


Figure A.6.5.5.1.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

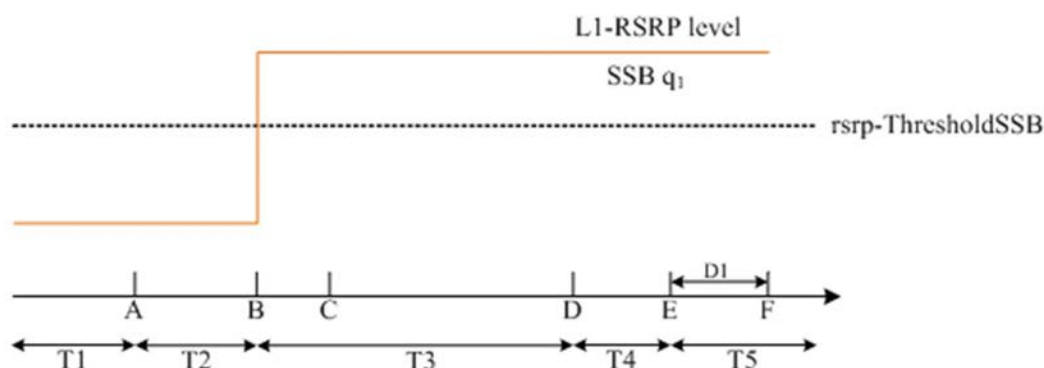


Figure A.6.5.5.1.1-2: L1-RSRP level variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.6.5.5.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 120 + 20$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.5.2 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode

A.6.5.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.6.5.5.2.1-1, A.6.5.5.2.1-2, A.6.5.5.2.1-3, A.6.5.5.2.1-4 and A.6.5.5.2.1-5 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.2.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.6.5.5.2.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period

when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.6.5.5.2.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.5.2.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
BWchannel	Config 1	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		40: NRB,c = 106	
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
SSB Configuration	Config 1		SSB.3 FR1	
	Config 2		SSB.3 FR1	
	Config 3		SSB.4 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2		Table A.3.8.2.2-1	

		Config 3		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)				0	
SSB Index assigned as CBD RS (q_1)				1	
OCNG parameters				OP.1	
CP length				Normal	
Correlation Matrix and Antenna Configuration				2x2 Low	
Beam failure detection transmission parameters	DCI format			1-0	
	Number of Control OFDM symbols			2	
	Aggregation level	CCE		8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB		0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB		0	
	DMRS precoder granularity			REG bundle size	
	REG bundle size			6	
DRX				DRX.7	A.3.3.7
Gap pattern ID				N.A.	
rlmInSyncOutOfSyncThreshold				Absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SCS kHz		-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3			-95	
powerControlOffsetSS				db0	Used for deriving rsrp-ThresholdC SI-RS
beamFailureInstanceMaxCount				n1	see clause 5.17 of TS 38.321 [7]

beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	5.17	
T3		s	3.24	
T4		s	0	
T5		s	1.97	
D1		s	1.94	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.6.5.5.2.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10

	Config 3		-10	-10	10	10	10
SSB_RP of set q ₁	Config 1	dBm/S CS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
N _{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Void						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.						
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.						

Table A.6.5.5.2.1-4: Void

Table A.6.5.5.2.1-5: Void

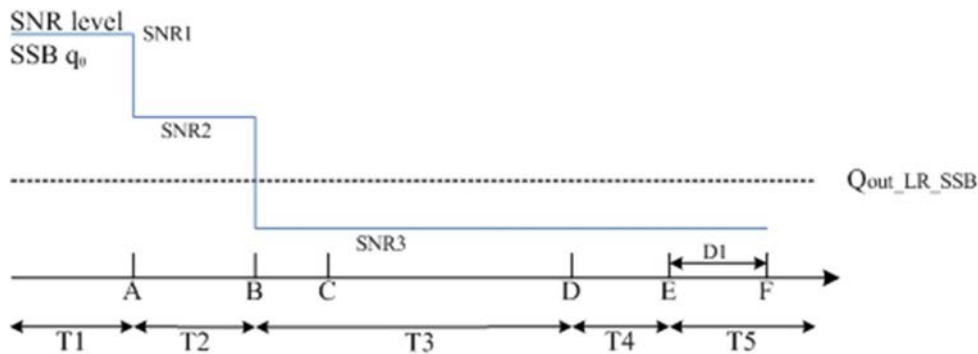


Figure A.6.5.5.2.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in DRX mode

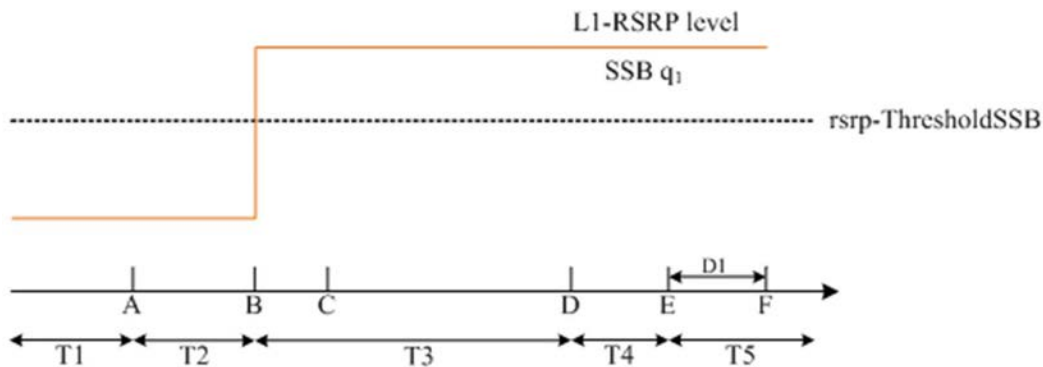


Figure A.6.5.5.2.1-2: L1-RSRP level variation for SSB-based beam failure detection and link recovery testing in DRX mode

A.6.5.5.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 1920 + 20$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.5.3 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.6.5.5.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.6.5.5.3.1-1, A.6.5.5.3.1-2, and below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.3.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.6.5.5.3.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.6.5.5.3.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.5.3.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value Test 1	Comment
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	A.3.1.3
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
SSB Configuration	Config 1		SSB.3 FR1	A.3.10
	Config 2		SSB.3 FR1	
	Config 3		SSB.4 FR1	
SSB Configuration	Config 1		SSB. 3 FR1	A.3.10
	Config 2		SSB. 3 FR1	
	Config 3		SSB. 4 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	A.3.11
	Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2		FR1 PRACH configuration 4	A.3.8.2
	Config 3		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection	DCI format		1-0	

transmission parameters				
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	N
rlminSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdCSI-RS	Config 1, 2	dBm/SC S kHz	-98	Threshold used for $Q_{in_LR_CSI-RS}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 and q_1	Config 1		CSI-RS.1.2 FDD	A.3.14
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.3.14
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
CSI-RS-Index assigned as RLM RS	Config 1		CSI-RS.1.2 FDD	A.3.14
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	
T5		s	0.08	
D1		s	0.05	

Note 1: UE-specific PDCCH is not transmitted after T1 starts.

Table A.6.5.3.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1	dBm/S CS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Void							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.							
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.							

Table A.6.5.5.3.1-4: Void

Table A.6.5.5.3.1-5: Void

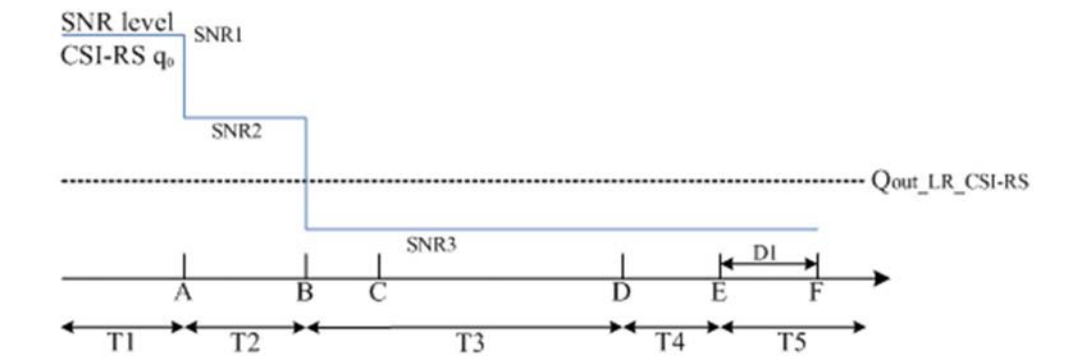


Figure A.6.5.5.3.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

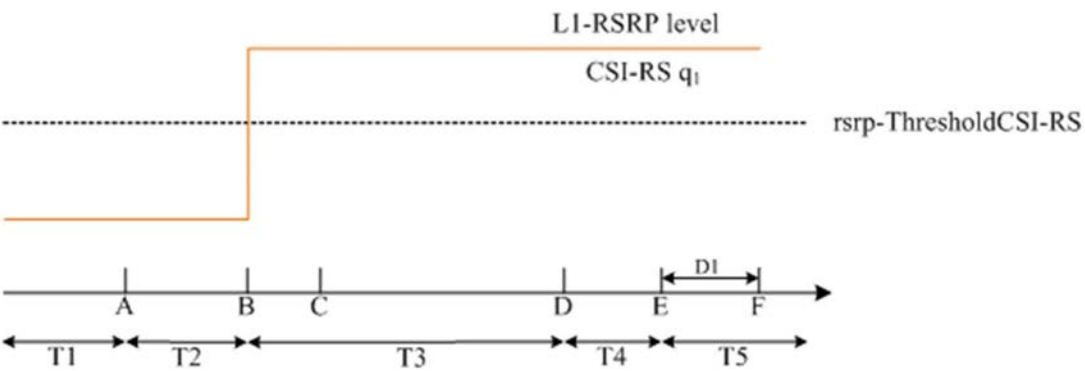


Figure A.6.5.5.3.1-2: L1-RSRP level variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

A.6.5.5.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 30+20$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.5.4 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode

A.6.5.5.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.6.5.5.4.1-1, A.6.5.5.4.1-2, A.6.5.5.4.1-3, and A.6.5.5.4.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.4.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.6.5.5.4.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.6.5.5.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.5.4.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf..21	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	A.3.1.3
	Config 2		CCR.1.1 TDD	

SSB Configuration	Config 3		CCR.2.1 TDD	
	Config 1		SSB. 3 FR1	A.3.10
	Config 2		SSB. 3 FR1	
	Config 3		SSB. 4 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	A.3.11
	Config 3		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2		FR1 PRACH configuration 4	A.3.8.2
	Config 3		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdCSI-RS	Config 1, 2	dBm/SC S kHz	-98	Threshold used for $Q_{in_LR_CSI-RS}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 and q_1	Config 1		CSI-RS.1.2 FDD	A.3.14.1

	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.3.14.1
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
CSI-RS-Index assigned as RLM RS	Config 1		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.94	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.6.5.5.4.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1	dB/SC S kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

Table A.6.5.5.4.1-4: Void

Table A.6.5.5.4.1-5: Void

Table A.6.5.5.4.1-6: Void

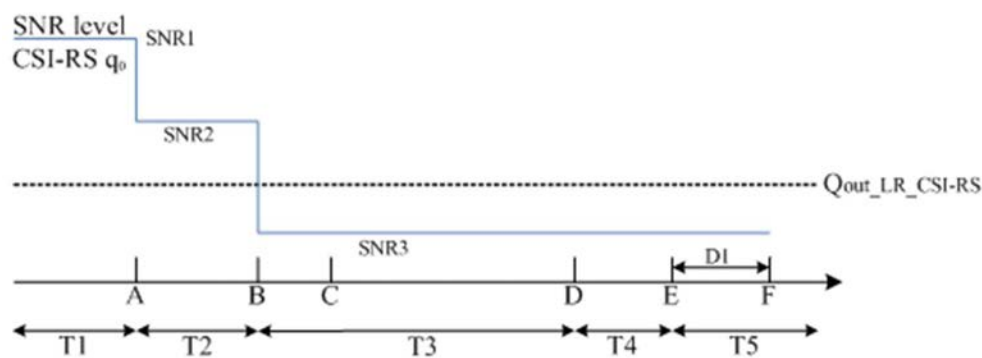


Figure A.6.5.5.4.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

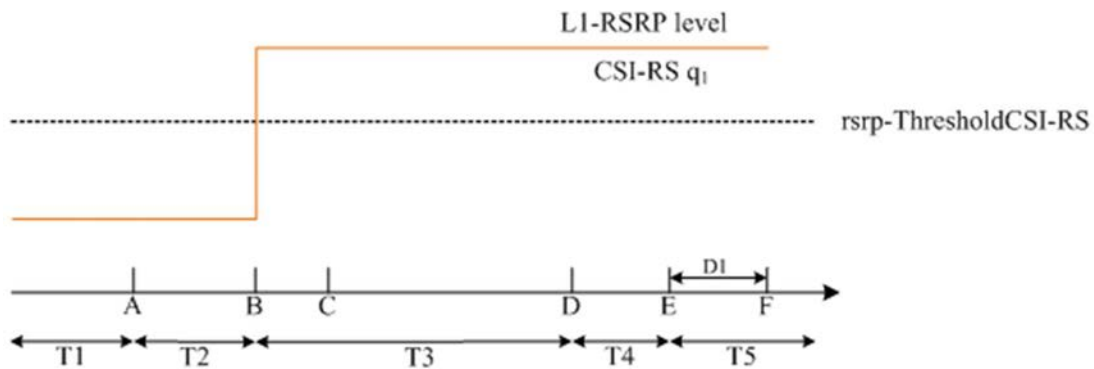


Figure A.6.5.5.4.1-2: L1-RSRP level variation for CSI-RS based beam failure detection and link recovery testing in DRX mode

A.6.5.5.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 1920 + 20$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.5.5 Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode

A.6.5.5.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UE's active DL BWP without *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.6.5.5.5.1-1, A.6.5.5.5.1-2, and below. There are two cells, cell 1 is the PCell and cell 2 is the SCell, in the test. UE is not provided by *schedulingRequestID-BFR-SCell-r16*, i.e., no configuration for PUCCH transmission resources, and UE shall perform the random access procedure to recover the beam failure. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.5.1-1 shows the SNR of the CSI-RS in set q_0 in the active SCell to emulate beam failure. Figure A.6.5.5.5.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be

configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.6.5.5.1-1: Supported test configurations for FR1 PCell and SCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.5.1-2: General test parameters for FR1 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value Test 1	Comment
Active PCell			Cell 1	
RF Channel Number for PCell			1	
Active SCell			Cell 2	
RF Channel Number for SCell			2	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
BW channel	Config 1	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		40: NRB,c = 106	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
SSB Configuration	Config 1		SSB.1 FR1	A.3.10
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTTC Configuration	Config 1, 2		SMTTC.1	A.3.11
	Config 3		SMTTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2	kHz	15	
	Config 3		30	
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.2-1	
	Config 3, 6		Table A.3.8.2.2-1	
csi-RS-Index assigned as beam failure detection RS in set q ₀ in activated SCell			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	

	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
schedulingRequestID-BFR-SCell-r16			absent	When the field is absent, the random access procedure will be triggered for SCell BFR
SSB Index assigned as CBD RS (q1) in activated SCell			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdBFR	Config 1, 2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 in activated SCell	Config 1		CSI-RS.1.2 FDD	A.3.14
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.3.14
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
CSI-RS-Index assigned as RLM RS in PCell	Config 1		CSI-RS.1.2 FDD	A.3.14
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	

T5	s	0.17	
D1	s	0.13	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.6.5.5.1-3: Cell specific test parameters for FR1 SCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Cell1 T1 to T5	Test 1 Cell2				
				T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1	dB	5	5	-3	-12	-12	-12
	Config 2		5	5	-3	-12	-12	-12
	Config 3		5	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1	dB	-10	-10	-10	10	10	10
	Config 2		-10	-10	-10	10	10	10
	Config 3		-10	-10	-10	10	10	10
SSB_RP of set q_1	Config 1	dBm/ SCS kHz	-108	-108	-108	-88	-88	-88
	Config 2		-108	-108	-108	-88	-88	-88
	Config 3		-105	-105	-105	-85	-85	-85
N_{oc}	Config 1	dBm/ 15kHz	-98	-98				
	Config 2		-98	-98				
	Config 3		-98	-98				
Propagation condition			TDL-C 300ns 100Hz	TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

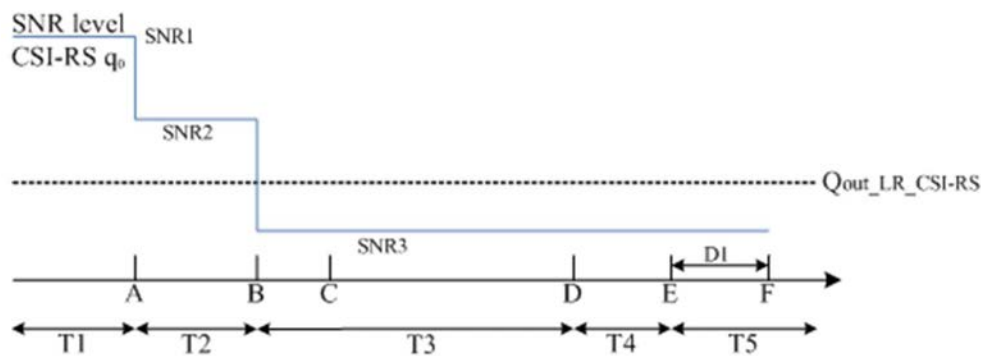


Figure A.6.5.5.1-1: SNR variation for beam failure detection and link recovery testing in for SCell non-DRX mode

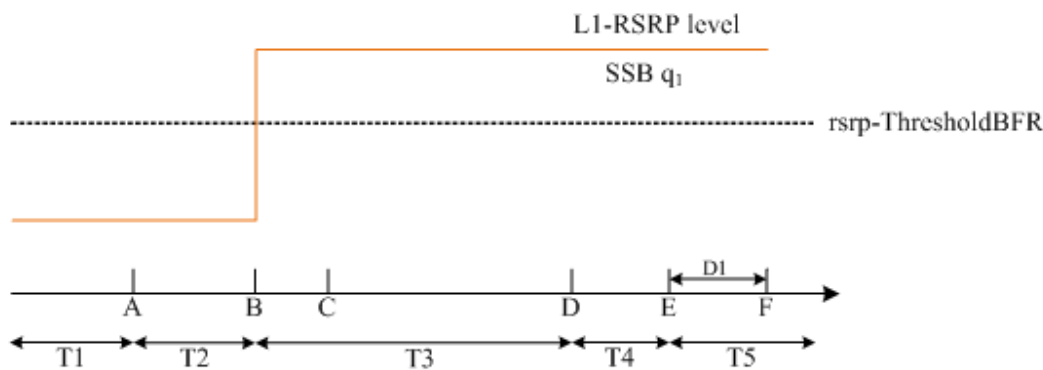


Figure A.6.5.5.1-2: L1-RSRP level variation for beam failure detection and link recovery testing for SCell in non-DRX mode

A.6.5.5.5.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 120 + 10$ ms after the start of T5, the UE shall transmit preamble for UL-SCH resource application, followed by MAC-CE on the assigned uplink resources containing a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble earlier than time point B.

During T5, the System Simulator shall transmit a Random Access Response to UE after the System Simulator receives the preamble from UE. The UE shall transmit the msg.3 containing candidate beam set q_1 for SCell BFR if UE receives the Random Access Response.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.5.6 Beam Failure Detection and Link Recovery Test for FR1 SCell configured with CSI-RS-based BFD and SSB-based LR in DRX mode

A.6.5.5.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP without *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.6.5.5.6.1-1, A.6.5.5.6.1-2, A.6.5.5.6.1-3, and A.6.5.5.6.1-4 below. There are two cells, cell 1 is the PCell and cell 2 is the SCell, in the test. UE is not provided by *schedulingRequestID-BFR-SCell-r16*, i.e., no configuration for PUCCH transmission resources, and UE shall perform the random access procedure to recover the beam failure. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.6.1-1 shows the SNR of the CSI-RS in set q_0 in the active SCell to emulate beam failure. Figure A.6.5.5.6.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in SCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.6.5.5.6.1-1: Supported test configurations for FR1 PCell and SCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.5.6.1-2: General test parameters for FR1 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Value	Comment
-----------	------	-------	---------

			Test 1	
Active PCell			Cell 1	
RF Channel Number for PCell			1	
Active SCell			Cell 2	
RF Channel Number for SCell			2	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
BW channel	Config 1	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		40: NRB,c = 106	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf..21	
CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
SSB Configuration	Config 1		SSB.1 FR1	A.3.10
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTTC Configuration	Config 1, 2		SMTTC.1	A.3.11
	Config 3		SMTTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2, 4, 5		Table A.3.8.2.1-1	
	Config 3, 6		Table A.3.8.2.1-1	
csi-RS-Index assigned as beam failure detection RS in set q_0 in activated SCell			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
schedulingRequestID-BFR-SCell-r16			absent	When the field is absent, the random access

				procedure will be triggered for SCell BFR
SSB Index assigned as CBD RS (q1) in activated SCell			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdBFR	Config 1, 2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_{in} in activated SCell	Config 1		CSI-RS.1.2 FDD	A.3.14.1
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.3.14.1
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
CSI-RS-Index assigned as RLM RS in PCell	Config 1		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.6.5.5.6.1-3: Cell specific test parameters for FR1 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Cell 1 T1 to T5	Test 1 Cell2				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB		0				
EPRE ratio of PDCCH to PDCCH DMRS	dB						

EPRE ratio of PBCH DMRS to SSS		dB	0					
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1	dB	5	5	-3	-12	-12	-12
	Config 2	dB	5	5	-3	-12	-12	-12
	Config 3	dB	5	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1	dB	-10	-10	-10	10	10	10
	Config 2	dB	-10	-10	-10	10	10	10
	Config 3	dB	-10	-10	-10	10	10	10
SSB_RP of set q_1	Config 1	dBm/ SCS kHz	-108	-108	-108	-88	-88	-88
	Config 2		-108	-108	-108	-88	-88	-88
	Config 3		-105	-105	-105	-85	-85	-85
N_{oc}	Config 1	dBm/15 kHz	-98	-98				
	Config 2		-98	-98				
	Config 3		-98	-98				
Propagation condition			TDL-C 300ns 100Hz	TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.								
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.								
Note 4: Void								
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.								
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.								
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.								
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.1.1-1.								
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.								

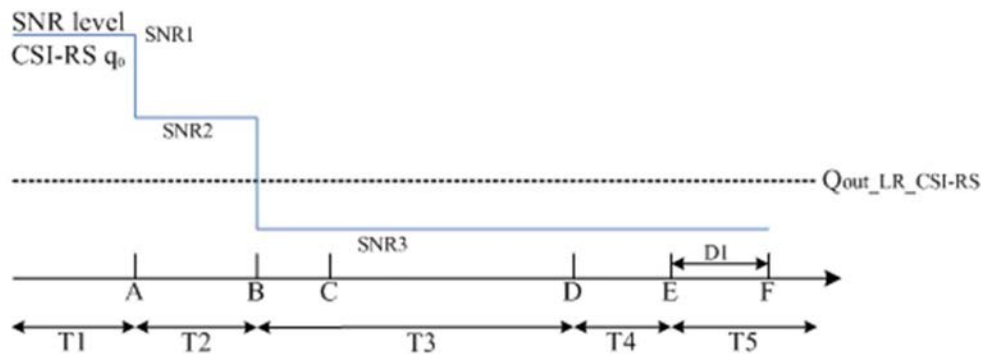


Figure A.6.5.5.6.1-1: SNR variation for beam failure detection and link recovery testing for SCell in DRX mode

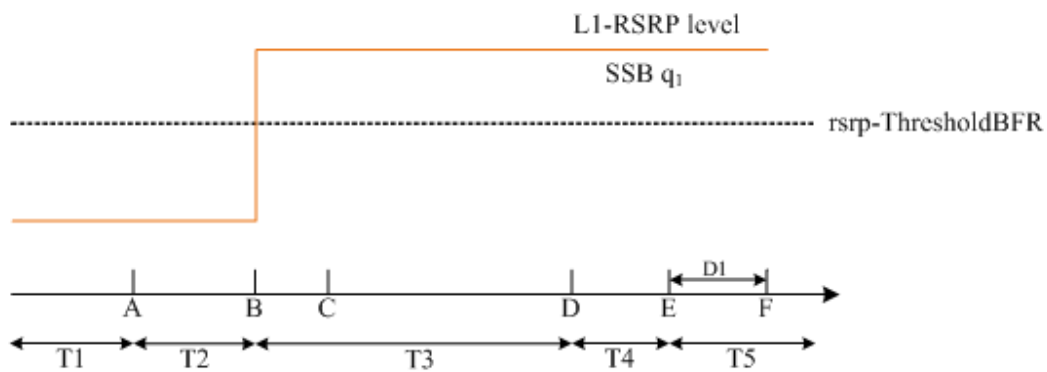


Figure A.6.5.5.6.1-2: L1-RSRP level variation for beam failure detection and link recovery testing for SCell in DRX mode

A.6.5.5.6.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 120 + 10$ ms after the start of T5, the UE shall transmit preamble for UL-SCH resource application, followed by MAC-CE on the assigned uplink resources containing a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble earlier than time point B.

During T5, the System Simulator shall transmit a Random Access Response to UE after the System Simulator receives the preamble from UE. The UE shall transmit the msg.3 containing candidate beam set q_1 for SCell BFR if UE receives the Random Access Response.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.5.7 TRP Specific Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in DRX mode

A.6.5.5.7.1 Test Purpose and Environment

The test scenario is NR configured in the test contains two TRPs (i.e., TRP0 and TRP1). Each TRP is configured with different CSI-RS for beam failure detection and candidate beam detection. CSI-RS is configured as BFD-RS and CBD-RS.

The purpose of this test is to verify that the UE properly detects TRP specific CSI-RS-based beam failure in the sets $q_{0,0}$ for TRP0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set $q_{1,0}$. The purpose is to test the downlink monitoring for beam failure detection on TRP0 within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based TRP specific beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.18 with *schedulingRequestID-BFR-r17* configured.

The test parameters are given in Tables A.6.5.5.7.1-1, A.6.5.5.7.1-2, A.6.5.5.7.1-3, and A.6.5.5.7.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.6.5.5.7.1-1 shows the variation of the downlink SNR of the CSI-RS in set $q_{0,0}$ and $q_{0,1}$ for TRP0 and TRP1 respectively to emulate CSI-RS based beam failure on TRP0. Figure A.6.5.5.7.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set $q_{1,0}$ and $q_{1,1}$ of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.6.5.5.7.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.6.5.5.7.1-2: General test parameters for FR1 PCell for CSI-RS-based TRP specific beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	

Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	A.3.1.3
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
SSB Configuration	Config 1		SSB.3 FR1	A.3.10
	Config 2		SSB.3 FR1	
	Config 3		SSB.4 FR1	
SMTTC Configuration	Config 1, 2		SMTTC.1	A.3.11
	Config 3		SMTTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2,3		FR1 PRACH configuration 4	A.3.8.2
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
schedulingRequestID-BFR- r17			Configured	
Periodicity of PUCCH for SR configuration for BFR on PCell	Config 1	slot	5	5ms
	Config 2, 3		10	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdCSI-RS	Config 1, 2	dBm/SC S kHz	-98	Threshold used for $Q_{in_LR_CSI-RS}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for TRP0	Config 1		CSI-RS.1.2 FDD	A.3.14.1
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
CSI-RS configuration for TRP1	Config 1		CSI-RS.1.7 FDD	
	Config 2		CSI-RS.1.6 TDD	
	Config 3		CSI-RS.2.7 TDD	
CSI-RS Index assigned as BFD RS (q0,0)			0	

CSI-RS Index assigned as CBD RS (q1,0)			1	
CSI-RS Index assigned as BFD RS (q0,1)			2	
CSI-RS Index assigned as CBD RS (q1,1)			3	
CSI-RS index assigned as RLM RS			0,1,2,3	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.3.14.1
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.6.5.7.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q _{0,0}	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
SNR_CSI-RS of set q _{0,1}	Config 1	dB	5	5	5	5	5
	Config 2		5	5	5	5	5
	Config 3		5	5	5	5	5
SNR_CSI-RS of set q _{1,0}	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
SNR_CSI-RS of set q _{1,1}	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
CSI-RS_RP of set q _{1,0}	Config 1	dB/SC S kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
CSI-RS_RP of set q _{1,1}	Config 1	dB/SC S kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85

N_{oc}	Config 1	dBm/15 KHz	-98
	Config 2		-98
	Config 3		-98
Propagation condition			TDL-C 300ns 100Hz
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. Note 4: Void Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS. Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1. Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.			

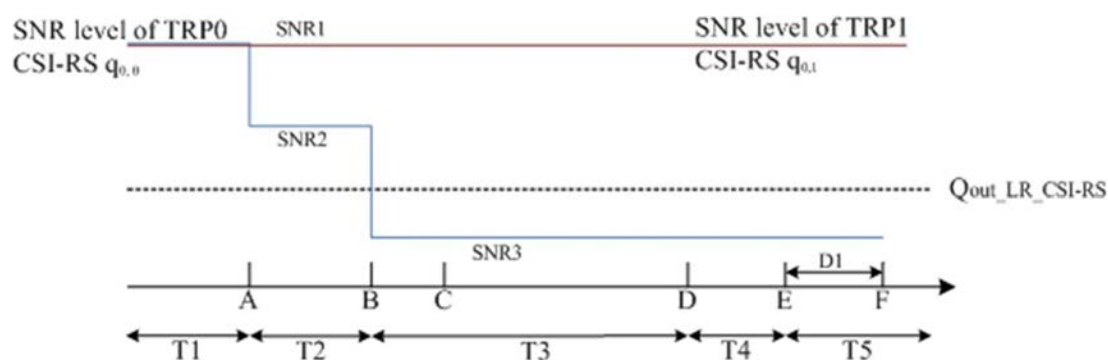


Figure A.6.5.7.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

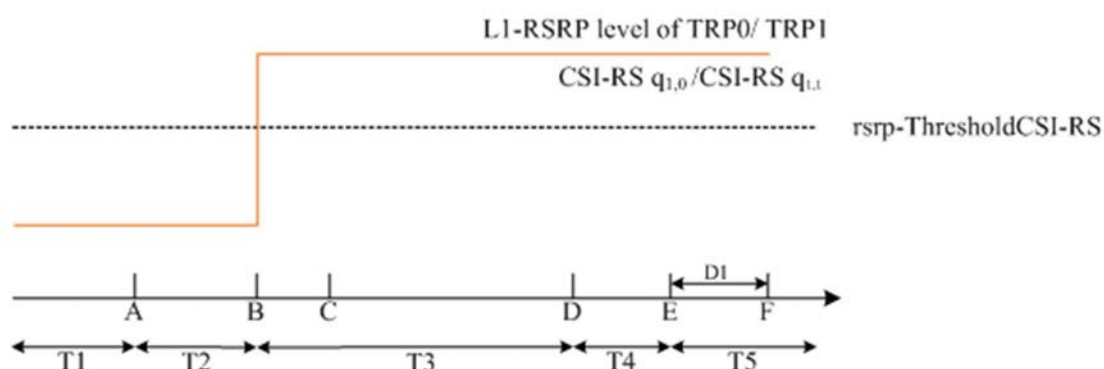


Figure A.6.5.7.1-2: L1-RSRP level variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.6.5.5.7.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set $q_{1,0}$.

No later than time point F occurring no later than $D1 = 1920 + 10$ ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{1,0}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{1,0}$ earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.6 Active BWP switch

A.6.5.6.1 DCI-based and Timer-based Active BWP Switch

A.6.5.6.1.1 NR FR1- NR FR1 DL active BWP switch of SCell with non-DRX in SA

A.6.5.6.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

The supported test configurations for PCell are shown in Table A.6.5.6.1.1.1-1 below. Supported test configurations for NR SCell are shown in table A.6.5.6.1.1.1-1A below. Test configuration for NR PCell and test configuration for NR SCell are chosen independently. The test scenario comprises of one NR PCell (Cell 1) and one SCell (Cell 2) as given in Table A.6.5.6.1.1.1-2. NR Cell-specific parameters are specified in Table A.6.5.6.1.1.1-3 and Table A.6.5.6.1.1.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PCell, BWP-0 in Cell 1 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PCell.

- UE is configured with a *bwp-InactivityTimer* timer value for SCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for SCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in SCell's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PCell no later than the first UL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on SCell's BWP-2 no later than the first DL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay}$).

The starting time of PCell (Cell 1) interruption due to BWP switch on SCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on SCell (Cell 2).

During T3,

The time period T3 starts from the slot # j , where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell's slot ($j + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PCell at latest on the first UL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on SCell's BWP-1 no later than the first DL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay}$).

The starting time of PCell (Cell 1) interruption due to BWP switch of SCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The test equipment verifies that potential interruption to PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of SCell, respectively.

Table A.6.5.6.1.1.1-1: DL BWP switch supported test configurations for NR PCell

Config	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth ($BW_{channel}$) defined in each test configuration,

Table A.6.5.6.1.1.1-1A: DL BWP switch supported test configurations for NR SCell

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode

2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration,	

Table A.6.5.6.1.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and SCell
<i>bwp-InactivityTimer</i>	ms	200	
PDCCH and PDSCH maximum number of HARQ transmission		1	For both PCell and SCell
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	μ s	3	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.6.5.6.1.1.1-3: NR Cell specific test parameters for NR PCell for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.1.2
BW_{channel}	Config 1,2		Note 7
	Config 3		Note 7
BW_{occupied}	Config 1,2	RB	52 ^{Note 5}
	Config 3		106 ^{Note 6}
Active BWP ID			0
Initial DL BWP Configuration			DLBWP.0.2 ^{Note4}
Initial UL BWP Configuration			ULBWP.0.2 ^{Note4}
Active DL BWP-0 Configuration			DLBWP.0.2 ^{Note4}
Active DL BWP-1 Configuration			N.A.
Active DL BWP-2 Configuration			N.A.
Active UL BWP-0 Configuration			ULBWP.0.2 ^{Note4}
Active UL BWP-1 Configuration			N.A.
Active UL BWP-2 Configuration			N.A.
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET	Config 1		CR.1.1 FDD

parameters	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.2 FDD
	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD
TRS Configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
OCNG Patterns	Config 1,2		OP.1 ^{Note 5}
	Config 3		OP.1 ^{Note 6}
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} ^{Note 2}	Config 1,2	dBm/SCS	-104
	Config 3		-101
N_{oc} ^{Note 2}		dBm/15KHz	-104
SS-RSRP ^{Note 3}	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I_o ^{Note 3}	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.			
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			
Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.			
Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured.			
Note 7: $N_{RB,c}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.			

Table A.6.5.6.1.1.1-4: NR Cell specific test parameters for NR SCell for DL BWP switch in SA

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config _{SCell} 1		FDD
	Config _{SCell} 2,3		TDD
TDD configuration	Config _{SCell} 1		Not Applicable
	Config _{SCell} 2		TDDConf.1.1
	Config _{SCell} 3		TDDConf.1.2
BW _{channel}	Config _{SCell} 1,2		Note 7
	Config _{SCell} 3		Note 7
BW _{occupied}	Config _{SCell} 1,2	RB	52 ^{Note 5}
	Config _{SCell} 3		106 ^{Note 6}
Active BWP ID			1, 2
Initial DL BWP Configuration			DLBWP.0.2 ^{Note4}
Initial UL BWP Configuration			N.A.
Active DL BWP-0 Configuration			N.A.
Active DL BWP-1 Configuration			DLBWP.1.1 ^{Note4}
Active DL BWP-2 Configuration			DLBWP.1.3 ^{Note4}
Active UL BWP-0 Configuration			N.A.
Active UL BWP-1 Configuration			N.A.
Active UL BWP-2 Configuration			N.A.
PDSCH Reference measurement channel	Config _{SCell} 1		SR.1.1 FDD
	Config _{SCell} 2		SR.1.1 TDD
	Config _{SCell} 3		SR.2.1 TDD
RMSI CORESET parameters	Config _{SCell} 1		CR.1.1 FDD
	Config _{SCell} 2		CR.1.1 TDD
	Config _{SCell} 3		CR.2.1 TDD
Dedicated CORESET parameters	Config _{SCell} 1		CCR.1.2 FDD
	Config _{SCell} 2		CCR.1.2 TDD
	Config _{SCell} 3		CCR.2.4 TDD
TRS Configuration	Config _{SCell} 1		TRS.1.1 FDD
	Config _{SCell} 2		TRS.1.1 TDD
	Config _{SCell} 3		TRS.1.2 TDD
OCNG Patterns	Config _{SCell} 1,2		OP.1 ^{Note 5}
	Config _{SCell} 3		OP.1 ^{Note 6}
SSB Configuration	Config _{SCell} 1,2		SSB.1 FR1
	Config _{SCell} 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N _{oc} ^{Note 2}	Config _{SCell} 1,2	dBm/SCS	-104
	Config _{SCell} 3		-101
N _{oc} ^{Note 2}		dBm/15KHz	-104
SS-RSRP ^{Note 3}	Config _{SCell} 1,2	dBm/SCS	-87
	Config _{SCell} 3		-84
Ē _s /I _{ot}		dB	17

$\hat{E}_s/N_{oc}$		dB	17
I_o ^{Note3}	Config _{SCell} 1,2	dBm/ 9.36MHz	-58.96
	Config _{SCell} 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3]. Note 5: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 10 MHz, 52 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured. Note 6: All UL/DL transmission shall be confined within $BW_{occupied}$ (i.e. 40 MHz, 106 RBs) from $F_{C,low}$, and I_o is independent of the $BW_{channel}$ configured. Note 7: $N_{RB,c}$ is derived from Table 5.3.2-1 in TS38.101-1[2] with configured $BW_{channel}$.			

A.6.5.6.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for SCell on PCell from the first UL slot that occurs after the beginning of DL slot ($i + T_{BWPswitchDelay} + k1$).

During T3, the UE shall start to send the ACK/NACK for SCell on PCell from the first UL slot that occurs after the beginning of DL slot ($j + T_{BWPswitchDelay} + k1$).

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T3, the start time of PCell interruption during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed SCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first DL slot that occurs after the beginning of DL slot ($i + T_{BWPswitchDelay} + k1$), ($j + T_{BWPswitchDelay} + k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.6.5.6.1.2 NR FR1 DL active BWP switch with non-DRX in SA

A.6.5.6.1.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6.

The supported test configurations are shown in Table A.6.5.6.1.2.1-1. The test scenario comprises of one cell (Cell 1) as given in Table A.6.5.6.1.2.1-2. Cell-specific parameters of the cell are specified in Table A.6.5.6.1.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
- UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

The cell has constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell1's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the Cell1 no later than the first UL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on Cell1's BWP-2 starting from the first DL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell1.

During T3,

The time period T3 starts from the slot # j , where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's slot ($j + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the Cell1 at latest on the first UL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on Cell1's BWP-1 starting from the first DL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

Table A.6.5.6.1.2.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	
Note 2: A UE which fulfils the requirements in test case A.6.5.6.1.1 can skip the test cases in A.6.5.6.1.2.	

Table A.6.5.6.1.2.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell1 on RF channel number 1.
CP length		Normal	
DRX		OFF	
<i>bwp-InactivityTimer</i>	ms	200	
PDCCH and PDSCH maximum number of HARQ transmission		1	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.6.5.6.1.2.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
BW _{channel}	Config 1		10 MHz: N _{RB,c} = 52
	Config 2		10 MHz: N _{RB,c} = 52
	Config 3		40 MHz: N _{RB,c} = 106
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,2,3		DLBWP.0.2 ^{Note 4}
Active DL BWP-1 Configuration	Config 1,2,3		DLBWP.1.1 ^{Note 4}
Active DL BWP-2 Configuration	Config 1,2,3		DLBWP.1.3 ^{Note 4}
Initial UL BWP Configuration	Config 1,2,3		ULBWP.0.2 ^{Note 4}
Active UL BWP-1 Configuration	Config 1,2,3		ULBWP.1.1 ^{Note 4}
Active UL BWP-2 Configuration	Config 1		N/A
	Config 2,3		ULBWP.1.3 ^{Note 4}
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.2 FDD
	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD

OCNG Patterns			OP.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTc Configuration			SMTc.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2,5		TRS.1.1 TDD
	Config 3,6		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} ^{Note 2}	Config 1,2	dBm/SCS	-104
	Config 3		-101
N_{oc} ^{Note 2}		dBm/15kHz z	-104
SS-RSRP ^{Note 3}	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I_o ^{Note3}	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with UL BWP.1.3 defined in clause 12 of TS 38.213 [3].			

A.6.5.6.1.2.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(j + T_{BWPswitchDelay} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed Cell1 active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$, $(j + T_{BWPswitchDelay} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.6.5.6.2 RRC-based Active BWP Switch

A.6.5.6.2.1 NR FR1 DL active BWP switch of Cell with non-DRX in SA

A.6.5.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.

The supported test configurations are shown in Table A.6.5.6.2.1.1-1. The test scenario comprises of one Cell (Cell 1) as given in Table A.6.5.6.2.1.1-2. Cell-specific parameters of Cell are specified in Table A.6.5.6.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted i . The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ as defined in clause 8.6.3 and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length} + k1$ on BWP-1 of final condition. The UE shall be continuously scheduled on PCell's BWP-1 of final condition starting from the first DL slot right after slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$.

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in Cell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when a valid ACK/NACK is received.

Table A.6.5.6.2.1.1-1: DL BWP switch supported test configurations in SA scenario

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.6.5.6.2.1.1-2: General test parameters for DL BWP switch in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
PDCCH and PDSCH maximum number of HARQ transmission		1	
T1	s	0.2	

Table A.6.5.6.2.1.1-3: NR Cell specific test parameters for DL BWP switch in SA scenario

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
BW _{channel}	Config 1		10 MHz: N _{RB,C} = 52
	Config 2		10 MHz: N _{RB,C} = 52
	Config 3		40 MHz: N _{RB,C} = 106
Active BWP ID			1
Initial DL BWP Configuration		Config 1,2, 3	DLBWP.0.2
Initial UL BWP Configuration		Config 1,2, 3	ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1, 2, 3	DLBWP.1.3
	Active UL BWP-1 Configuration	Config 1, 2, 3	ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration	Config 1, 2, 3	DLBWP.1.1
	Active UL BWP-1 Configuration	Config 1, 2, 3	ULBWP.1.1
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR2.1 TDD

RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.2 FDD
	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTc Configuration			SMTc.1
TRS Configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
Antenna Configuration			1x2 Low
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^(Note 1)			
EPRE ratio of OCNG to OCNG DMRS ^(Note 1)			
N _{oc} ^{Note 2}	Config 1,2	dBm/SCS	-104
	Config 3		-101
SS-RSRP ^{Note 3}	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I _O ^{Note3}	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

A.6.5.6.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the Cell from the first DL slot that occurs right after the beginning of slot $i + \frac{T_{\text{RRCPprocessingDelay}} + T_{\text{BWPswitchDelayRR}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCPprocessingDelay}} + T_{\text{BWPswitchDelayRR}}}{\text{NR Slot length}} + k1$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed Cell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.6.3 Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs

A.6.5.6.3.1 NR FR1- NR FR1 DL active BWP switch on multiple CCs with non-DRX in SA

A.6.5.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify requirements on the DL BWP switch delay on multiple CCs and interruption requirement for NR victim cell, both defined in clause 8.6.

The supported test configurations for NR PCell are shown in Table A.6.5.6.3.1.1-1 below. The supported test configurations for NR SCells are shown in Table A.6.5.6.3.1.1-1A below. Test configuration for NR PCell and test configuration for NR SCells are chosen independently. Test configuration for two NR SCells are chosen independently. The test scenario comprises of one NR PCell (Cell 1) and two NR SCells (Cell 2 and Cell 3) as given in Table A.6.5.6.3.1.1-2. NR Cell-specific parameters are specified in Table A.6.5.6.3.1.1-3, Table A.6.5.6.3.1.1-4 and Table A.6.5.6.3.1.1-5 below.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 2) and SCell (Cell 3) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and Cell 3 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending. Before the test starts,

- UE is connected to PCell (Cell 1) on radio channel 1 (PCC), and SCell (Cell 2) on radio channel 2 (SCC) and SCell (Cell 3) on radio channel 3(SCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for SCell (Cell 2) and SCell (Cell 3), BWP-1 and BWP-2, in Cell 2 and Cell 3 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with a single UE-specific downlink bandwidth part, BWP-0, for PCell (Cell 1). BWP-0 includes the bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell (Cell 2) and SCell (Cell 3).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PCell (Cell 1).
- UE is configured with a *bwp-InactivityTimer* timer value for SCell (Cell 2) and SCell (Cell 3).

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for both SCell (Cell 2) and SCell (Cell 3) DL BWP switch, sent from the test equipment to the UE, is received at the UE side in both SCell (Cell 2)'s and SCell (Cell 3)'s slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2 at both SCell (Cell 2) and SCell (Cell 3).

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell (Cell 2)'s and SCell (Cell 3)'s DL slot ($i + T_{MultipleBWPswitchDelay}$) as defined in clause 8.6.2A.1 and starts to

report valid ACK/NACK for the both SCell (Cell 2) and SCell (Cell 3) no later than the first UL slot that occurs after the beginning of slot $(i + T_{MultipleBWPswitchDelay} + k1)$. The UE shall be continuously scheduled on both SCell (Cell 2)'s and SCell (Cell 3)'s BWP-2 no later than the first DL slot that occurs after the beginning of slot $(i + T_{MultipleBWPswitchDelay})$.

The starting time of PCell interruption due to BWP switch on SCell (Cell 2) and SCell (Cell 3) shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on SCell (Cell 2) and SCell (Cell 3).

During T3,

The time period T3 starts from the slot #j, where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1 on both SCell (Cell 2) and SCell (Cell 3).

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell (Cell 2)'s an SCell (Cell 3)'s slot $(j + T_{MultipleBWPswitchDelay})$ as defined in clause 8.6.2A.1 and starts to report valid ACK/NACK for the SCell (Cell 2) and SCell (Cell 3) no later than the first UL slot that occurs after the beginning of slot $(j + T_{MultipleBWPswitchDelay} + k1)$. The UE shall be continuously scheduled on SCell (Cell 2)'s and SCell (Cell 3)'s BWP-1 no later than the first DL slot that occurs after the beginning of slot $(j + T_{MultipleBWPswitchDelay})$.

The starting time of PCell interruption due to BWP switch of SCell (Cell 2) and SCell (Cell 3) shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in SCells by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The test equipment verifies that potential interruption to PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of SCells, respectively.

Table A.6.5.6.3.1.1-1: DL BWP switch supported test configurations for NR PCell

Config	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth ($BW_{channel}$) defined in each test configuration

Table A.6.5.6.3.1.1-1A: DL BWP switch supported test configurations for NR SCells

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth ($BW_{channel}$) defined in each test configuration
Note 3:	Test configurations of two NR SCells are selected independently.

Table A.6.5.6.3.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2; Cell 3	SCell on RF channel number 2 and number 3.
CP length		Normal	
DRX		OFF	For both PCell and SCells (Cell 2 and Cell 3)
<i>bwp-InactivityTimer</i>	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for Cell 1 on SCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for Cell 2 on SCC.
Cell2 and Cell 3 timing offset to cell1	µs	3	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.6.5.6.3.1.1-3: NR Cell specific test parameters for NR PCell for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
BW _{channel}	Config 1,2		10 MHz: N _{RB,c} = 52
	Config 3		40 MHz: N _{RB,c} = 106
Active BWP ID			0
Initial DL BWP Configuration			DLBWP.0.2 ^{Note4}
Initial UL BWP Configuration			ULBWP.0.2 ^{Note4}
Active DL BWP-0 Configuration			DLBWP.0.2 ^{Note4}
Active DL BWP-1 Configuration			N.A.
Active DL BWP-2 Configuration			N.A.
Active UL BWP-0 Configuration			ULBWP.0.2 ^{Note4}
Active UL BWP-1 Configuration			N.A.
Active UL BWP-2 Configuration			N.A.
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTc Configuration			SMTc.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			

EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
$N_{oc}^{Note\ 2}$	Config 1,2	dBm/SCS	-104
	Config 3		-101
$N_{oc}^{Note\ 2}$		dBm/15KHz	-104
SS-RSRP ^{Note 3}	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I_o^{Note3}	Config 1,2	dBm/9.36MHz	-58.96
	Config 3	dBm/38.16MHz	-52.86
Propagation Condition			AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].		

Table A.6.5.6.3.1.1-4: NR Cell specific test parameters for SCell (NR Cell 2) for DL BWP switch in SA

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config _{SCell1} 1		FDD
	Config _{SCell1} 2,3		TDD
TDD configuration	Config _{SCell1} 1		Not Applicable
	Config _{SCell1} 2		TDDConf.1.1
	Config _{SCell1} 3		TDDConf.2.1
BW _{channel}	Config _{SCell1} 1,2		10 MHz: $N_{RB,c} = 52$
	Config _{SCell1} 3		40 MHz: $N_{RB,c} = 106$
Active BWP ID			1, 2
Initial DL BWP Configuration			DLBWP.0.2 ^{Note4}
Initial UL BWP Configuration			ULBWP.0.2 ^{Note4}
Active DL BWP-0 Configuration			N.A.
Active DL BWP-1 Configuration			DLBWP.1.1 ^{Note4}
Active DL BWP-2 Configuration			DLBWP.1.3 ^{Note4}
Active UL BWP-0 Configuration			N.A.
Active UL BWP-1 Configuration			ULBWP.1.1 ^{Note4}
Active UL BWP-2 Configuration			ULBWP.1.3 ^{Note4}
PDSCH Reference measurement channel	Config _{SCell1} 1		SR.1.1 FDD
	Config _{SCell1} 2		SR.1.1 TDD
	Config _{SCell1} 3		SR.2.1 TDD
RMSI CORESET parameters	Config _{SCell1} 1		CR.1.1 FDD
	Config _{SCell1} 2		CR.1.1 TDD
	Config _{SCell1} 3		CR.2.1 TDD

Dedicated CORESET parameters	Config _{SCell1} 1		CCR.1.1 FDD
	Config _{SCell1} 2		CCR.1.1 TDD
	Config _{SCell1} 3		CCR.2.1 TDD
OCNG Patterns			OP.1
SSB Configuration	Config _{SCell1} 1,2		SSB.1 FR1
	Config _{SCell1} 3		SSB.2 FR1
SMTc Configuration			SMTc.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N _{oc} ^{Note 2}	Config _{SCell1} 1,2	dBm/SCS	-104
	Config _{SCell1} 3		-101
N _{oc} ^{Note 2}		dBm/15KH z	-104
SS-RSRP ^{Note 3}	Config _{SCell1} 1,2	dBm/SCS	-87
	Config _{SCell1} 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I _o ^{Note3}	Config _{SCell1} 1,2	dBm/ 9.36MHz	-58.96
	Config _{SCell1} 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.		
Note 3	SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].		

Table A.6.5.6.3.1.1-5: NR Cell specific test parameters for SCell (NR Cell 3) for DL BWP switch in SA

Parameter		Unit	Cell 3
Frequency Range			FR1
Duplex mode	Config _{SCell2} 1		FDD
	Config _{SCell2} 2,3		TDD
TDD configuration	Config _{SCell2} 1		Not Applicable
	Config _{SCell2} 2		TDDConf.1.1
	Config _{SCell2} 3		TDDConf.2.1
BW _{channel}	Config _{SCell2} 1,2		10 MHz: N _{RB,c} = 52
	Config _{SCell2} 3		40 MHz: N _{RB,c} = 106
Active BWP ID			1,2
Initial DL BWP Configuration			DLBWP.0.2 ^{Note4}
Initial UL BWP Configuration			ULBWP.0.2 ^{Note4}

Active DL BWP-0 Configuration			N.A.
Active DL BWP-1 Configuration			DLBWP.1.1 ^{Note4}
Active DL BWP-2 Configuration			DLBWP.1.3 ^{Note4}
Active UL BWP-0 Configuration			N.A.
Active UL BWP-1 Configuration			ULBWP.1.1 ^{Note4}
Active UL BWP-2 Configuration			ULBWP.1.3 ^{Note4}
PDSCH Reference measurement channel	Config _{SCell2} 1		SR.1.1 FDD
	Config _{SCell2} 2		SR.1.1 TDD
	Config _{SCell2} 3		SR.2.1 TDD
RMSI CORESET parameters	Config _{SCell2} 1		CR.1.1 FDD
	Config _{SCell2} 2		CR.1.1 TDD
	Config _{SCell2} 3		CR.2.1 TDD
Dedicated CORESET parameters	Config _{SCell2} 1		CCR.1.1 FDD
	Config _{SCell2} 2		CCR.1.1 TDD
	Config _{SCell2} 3		CCR.2.1 TDD
OCNG Patterns			OP.1
SSB Configuration	Config _{SCell2} 1,2		SSB.1 FR1
	Config _{SCell2} 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N _{oc} ^{Note 2}	Config _{SCell2} 1,2	dBm/SCS	-104
	Config _{SCell2} 3		-101
N _{oc} ^{Note 2}		dBm/15KHz	-104
SS-RSRP ^{Note 3}	Config _{SCell2} 1,2	dBm/SCS	-87
	Config _{SCell2} 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I _o ^{Note3}	Config _{SCell2} 1,2	dBm/9.36MHz	-58.96
	Config _{SCell2} 3	dBm/38.16MHz	-52.86
Propagation Condition			AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.		
Note 3	SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].		

A.6.5.6.3.1.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for both SCell (Cell 2) and SCell (Cell 3) from the first UL slot that occurs after the beginning of DL slot $(i + T_{MultipleBWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK/NACK for both SCell (Cell 2) and SCell (Cell 3) from the first UL slot that occurs after the beginning of DL slot $(j + T_{MultipleBWPswitchDelay} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{MultipleBWPswitchDelay}$ defined in 8.6.2A.1.

All of the above test requirements shall be fulfilled in order for the observed Cell 2 and Cell 3 active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T3, the start time of PCell interruption during SCell (Cell 2) and SCell (Cell 3) active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed SCell (Cell 2) and SCell (Cell 3) active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot $(i + T_{MultipleBWPswitchDelay} + k1)$, $(j + T_{MultipleBWPswitchDelay} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.6.5.6.4 SCell dormancy switch

A.6.5.6.4.1 NR FR1 PCell SCell dormancy switch of single FR1 SCell outside active time

A.6.5.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify the SCell dormancy switch delay requirements defined in clause 8.6 when the UE is triggered to switch between dormancy to non-dormancy and non-dormancy to dormancy outside the DRX active time. Further the test purpose is to verify the interruption rate on other serving cells when the UE performing CSI and RRM measurements on dormant SCell(s) as defined in clause 8.2.2.2.12 and also to verify the interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

In the test scenario UE is connected to one PCell (Cell 1) in FR1 and one SCell in FR1. In the test the SCell is switched from non-dormancy to dormancy, and vice versa, at a point in time before start of *onDuration*. The UE is configured to monitor PDCCH for DCI format 2_6 at *ps-Offset* before the start of *onDuration*. Two tests are specified, where a UE that only supports triggering within the first three OFDM symbols of a slot shall undergo Test1 only, and a UE that supports triggering also in remaining OFDM symbols of a slot shall undergo both Test1 and Test2. In the tested scenario, *ps-Offset* is selected to correspond to the dormancy switching time specified in clause 8.6.

The supported test configurations for NR PCell are shown in Table A.6.5.6.4.1.1-1, The supported test configurations for NR SCell are shown in Table A.6.5.6.4.1.1-1A. Test configuration for NR PCell and test configuration for NR SCell are chosen independently. The general test parameters are given in Table A.6.5.6.4.1.1-2. NR Cell-specific parameters are specified in Table A.6.5.6.4.1.1-3 and Table A.6.5.6.4.1.1-4.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PCell, BWP-0 in Cell 1 before starting the test.
- UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell.
- UE is indicated in *dormantBWP-Id* that the active DL BWP is BWP-2 in the SCell.
- UE is configured with DRX.
- UE is configured to monitor DCI format 2_6, and to be active during *onDuration* even when no DCI format 2_6 is detected (*ps-WakeUp*).

All cells have constant signal levels throughout the test.

The test consists of 4 successive time periods, with durations of T1, T2, T3 and T4, respectively.

During T1,

Time period T1 starts when a DCI format 2_6 command intended for dormant BWP switch in a SCell from non-dormancy to dormancy, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i* (at *ps-Offset* before *onDuration*). Upon reception of the PDCCH indicating entering dormant BWP in PCell (i.e. through cross-carrier scheduling), UE shall switch the DL BWP-1 to DL BWP-2 in SCell, i.e., switching from non-dormant BWP to dormant BWP and the UE shall complete the switching before the start of *onDuration*.

The UE shall be able to receive PDCCH on PCell no later than the first DL slot that occurs after the beginning of PCell's DL slot ($i + T_{\text{dormantBWPswitchDelay}}$) as defined in clause 8.6 and starts to report valid ACK/NACK on the PCell no later than the first UL slot that occurs after the beginning of slot ($i + N$) as defined in clause 10.3 in TS38.213. The UE shall be continuously scheduled on PCell's BWP-0 no later than the first DL slot that occurs after the beginning of slot ($i + T_{\text{dormantBWPswitchDelay}}$).

The starting time of PCell (Cell 1) interruption due to dormancy switching on SCell shall occur within the dormant BWP switch delay, i.e. before start of *onDuration*.

The UE shall not transmit signals on SCell after the beginning of PCell's DL slot ($i + T_{\text{dormantBWPswitchDelay}}$) as defined in clause 8.6. The UE shall not be scheduled on SCells BWP-1 no later than the first DL slot that occurs after the beginning of slot ($i + T_{\text{dormantBWPswitchDelay}}$).

Time period T2 starts when T1 is completed. During T2, the test equipment continues to schedule the UE continuously in PCell. The UE shall carry out CSI and RRM measurements on the dormant SCells. The UE shall report ACK/NACK in PCell in response to scheduled PDSCH, with the maximum loss of transmitted ACK/NACKs fulfilling the requirement in clause 8.2.2.2.12. The test equipment verifies that the loss of ACK/NACKs is no larger than 1.5%.

Time period T3 starts when T2 is completed. During T3, the test equipment does not schedule the UE, by which the inactivity timer expires and the UE stops monitoring PDCCH except for signalling using DCI format 2_6 at wake-up signalling occasions.

During T4,

Time period T4 starts when a DCI format 2_6 command for leaving dormant BWP in SCell, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *j* (at *ps-Offset* before *onDuration*). Upon reception of the PDCCH indicating leaving dormant BWP in PCell (i.e. through cross-

carrier scheduling), UE shall switch the DL BWP-2 to DL BWP-1 in SCell, i.e., switching from dormant BWP to non-dormant BWP.

The UE shall be able to receive PDSCH on PCell and SCell no later than the first DL slot that occurs after the beginning of PCell's DL slot ($j + T_{\text{dormantBWPswitchDelay}}$) as defined in clause 8.6 and starts to report valid ACK/NACK on the PCell (for both PCell and SCell) no later than the first UL slot that occurs after the beginning of slot ($j+N$) as defined in clause 10.3 in TS 38.213. The UE shall be continuously scheduled on PCell's BWP-0 no later than the first DL slot that occurs after the beginning of slot ($j + T_{\text{dormantBWPswitchDelay}}$).

The starting time of PCell (Cell 1) interruption due to dormancy switching on SCell shall occur within the dormant BWP switch delay.

The UE shall be ready to transmit signals on SCell no later than the first DL slot that occurs after the beginning of PCell's DL slot ($j + T_{\text{dormantBWPswitchDelay}}$) as defined in clause 8.6. The UE shall be ready to continuously scheduled on SCell's BWP-1 no later than the first DL slot that occurs after the beginning of slot ($j + T_{\text{dormantBWPswitchDelay}}$).

The test equipment verifies the DL dormant BWP switch time in SCell by counting the slots from the time when the dormant BWP switch command is received till an ACK/NACK on PCell is received.

The test equipment verifies that potential interruption to PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during dormant BWP switch of SCell (i.e. before start of *onDuration*), respectively.

Config	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration

Table A.6.5.6.4.1.1-1A: SCell dormancy switch supported test configurations for NR SCell

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration

Table A.6.5.6.4.1.1-2: General test parameters for SCell dormancy switch in SA

Parameter	Unit	Value		Comment
		Test 1	Test 2	
NR RF Channel Number		1, 2		Two NR radio channels are used for this test
Active PCell		Cell 1		PCell on RF channel number 1.
Active SCell		Cell 2		SCell on RF channel number 2.
CP length		Normal		
DRX		ON		For both PCell and SCell
Cell-individual offset for cells on RF channel number 1	dB	0		Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0		Individual offset for cells on SCC.

Cell2 timing offset to cell1	μs	3		Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
OFDM symbol range in slot for transmission of DCI with dormancy indication		0 – 2	3 – 11	
T1	s	0.2		
T2	s	0.2		

Table A.6.5.6.4.1.1-3: NR Cell specific test parameters for NR PCell for SCell dormancy switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
BW _{channel}	Config 1,2		10 MHz: N _{RB,c} = 52
	Config 3		40 MHz: N _{RB,c} = 106
Active BWP ID			0
Initial DL BWP Configuration			DLBWP.0.2 ^{Note4}
Initial UL BWP Configuration			ULBWP.0.2 ^{Note4}
Active DL BWP-0 Configuration			DLBWP.0.2 ^{Note4}
Active DL BWP-1 Configuration			N.A.
Active DL BWP-2 Configuration			N.A.
Active UL BWP-0 Configuration			ULBWP.0.2 ^{Note4}
Active UL BWP-1 Configuration			N.A.
Active UL BWP-2 Configuration			N.A.
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters, Test 1	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
Dedicated CORESET parameters, Test 2	Config 1		CCR.1.5 FDD
	Config 2		CCR.1.5 TDD
	Config 3		CCR.2.3 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			

N_{oc} ^{Note 2}	Config 1,2	dBm/SCS	-104
	Config 3		-101
N_{oc} ^{Note 2}		dBm/15KHz	-104
SS-RSRP ^{Note 3}	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I_o ^{Note 3}	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

Table A.6.5.6.4.1.1-4: NR Cell specific test parameters for NR SCell for SCell dormancy switch in SA

Parameter		Unit	Cell2
Frequency Range			FR1
Duplex mode	Config _{SCell} 1		FDD
	Config _{SCell} 2,3		TDD
TDD configuration	Config _{SCell} 1		Not Applicable
	Config _{SCell} 2		TDDConf.1.1
	Config _{SCell} 3		TDDConf.2.1
BW _{channel}	Config _{SCell} 1,2		10 MHz: $N_{RB,c} = 52$
	Config _{SCell} 3		40 MHz: $N_{RB,c} = 106$
Active BWP ID			1
Initial DL BWP Configuration			DLBWP.0.2 ^{Note4}
Initial UL BWP Configuration			ULBWP.0.2 ^{Note4}
Active DL BWP-0 Configuration			N.A.
Active DL BWP-1 Configuration			DLBWP.1.1 ^{Note4}
Active DL BWP-2 Configuration			DLBWP.1.3 ^{Note4}
Active UL BWP-0 Configuration			N.A.
Active UL BWP-1 Configuration			ULBWP.1.1 ^{Note4}
Active UL BWP-2 Configuration			ULBWP.1.3 ^{Note4}
PDSCH Reference measurement channel	Config _{SCell} 1		SR.1.1 FDD
	Config _{SCell} 2		SR.1.1 TDD
	Config _{SCell} 3		SR.2.1 TDD
RMSI CORESET parameters	Config _{SCell} 1		CR.1.1 FDD
	Config _{SCell} 2		CR.1.1 TDD
	Config _{SCell} 3		CR.2.1 TDD
Dedicated CORESET parameters, Test 1	Config _{SCell} 1		CCR.1.1 FDD
	Config _{SCell} 2		CCR.1.1 TDD
	Config _{SCell} 3		CCR.2.1 TDD
Dedicated CORESET parameters, Test 2	Config _{SCell} 1		CCR.1.1 FDD
	Config _{SCell} 2		CCR.1.1 TDD
	Config _{SCell} 3		CCR.2.3 TDD
OCNG Patterns			OP.1
SSB Configuration	Config _{SCell} 1,2		SSB.1 FR1

		Config _{SCell 3}		SSB.2 FR1
SMTC Configuration				SMTC.1
Correlation Matrix and Antenna Configuration				1x2 Low
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N _{oc} ^{Note 2}	Config _{SCell 1,2}	dBm/SCS	-104	
	Config _{SCell 3}		-101	
N _{oc} ^{Note 2}		dBm/15KHz	-104	
SS-RSRP ^{Note 3}	Config _{SCell 1,2}	dBm/SCS	-87	
	Config _{SCell 3}		-84	
$\hat{E}_s/I_{ot}$			dB	17
$\hat{E}_s/N_{oc}$			dB	17
I _o ^{Note3}	Config _{SCell 1,2}	dBm/ 9.36MHz	-58.96	
	Config _{SCell 3}	dBm/ 38.16MHz	-52.86	
Propagation Condition				AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38 213 [3].				

A.6.5.6.4.1.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot ($i+N$) (i.e. from the start of *onDuration*).

During time period T2, the UE shall transmit ACK/NACKs in response to scheduling in PCell and the rate of missed ACK/NACKs shall be no more than 1.5%.

During T4, the UE shall start to send the ACK/NACK for PCell and SCell from the first UL slot that occurs after the beginning of DL slot ($j+N$) (i.e. from the start of *onDuration*).

Where, N is the timing that UE provide HARQ-ACK information in response to a detection of a DCI format 2_6 indicating SCell dormancy as specified in [3].

All of the above test requirements shall be fulfilled in order for the observed SCell dormant BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T4, the start time of PCell interruption during SCell dormant BWP switch shall not happen outside the dormant BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for dormant BWP switch in clause 8.6.

NOTE: During T1, T4 if there are no uplink resources for reporting the ACK/NACK in the first DL slot that occurs after the beginning of DL slot $(i + N)$, $(j + N)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.6.5.6.4.2 NR FR1 PCell SCell dormancy switch of two FR1 SCells inside active time

A.6.5.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify fulfillment of SCell dormancy switching delay requirements in clause 8.6.2A, requirements on interruptions due to SCell dormancy switching in clause 8.2.2.2.12.1, and requirements on interruptions due to CSI and RRM measurements on dormant SCells in clauses 8.2.2.2.12.2 and 8.2.2.2.12.3, respectively. In the tested scenario, the UE is connected to PCell and two SCells in FR1, and the SCells are switched from non-dormancy to dormancy, and back, during active time. Depending on UE capability on whether DCI for dormancy switching can be received also later than within the initial three OFDM symbols of a slot, the UE may have to undergo one or two sets of tests. A UE that only supports triggering during within the first three OFDM symbols of a slot shall only undergo Test1 and Test2, whereas a UE that supports triggering also in remaining OFDM symbols of a slot shall undergo Test1 through Test4.

The supported test configurations for NR PCell are provided in Table A.6.5.6.4.2.1-1 below. The supported test configurations for NR SCells are provided in Table A.6.5.6.4.2.1-1A below. Test configuration for NR PCell and test configuration for NR SCells are chosen independently. Test configurations for two NR SCells are chosen independently. General test parameters are provided in Table A.6.5.6.4.2.1-2, and cell-specific parameters are provided in Table A.6.5.6.4.2.1-3, Table A.6.5.6.4.2.1-4 and Table A.6.5.6.4.2.1-5 below.

The tests consist of three consecutive time periods T1, T2, and T3, respectively.

Three carriers are used in the test, each within FR1 and each with one cell. Cell 1 (PCell) is on RF channel 1 (PCC), Cell 2 (SCell1) is on RF channel 2 (SCC1), and Cell 3 (SCell2) is on RF channel 3 (SCC2). All three cells have constant signal levels throughout the test. The UE is continuously scheduled in PCell throughout the test.

Before the test starts,

- UE is connected to Cell 1 (PCell), Cell 2 (SCell1) and Cell 3 (SCell2).
- UE is configured with a single UE-specific downlink bandwidth part, BWP-0, for Cell 1. BWP-0 includes the bandwidth of the initial DL BWP and SSB.
- UE is configured with one non-dormant and one dormant UE-specific downlink bandwidth part, BWP-0 and BWP-1, respectively, for Cell 2 and Cell 3. BWP-0 includes the bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP in Cell 1 is BWP-0.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP in Cell 2 is BWP-0.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP in Cell 3 is BWP-0.
- UE is continuously scheduled in PCell, SCell1 and SCell2.

T1 starts at the point in time at which the UE receives a DCI with dormancy indication on PDCCH in PCell at the antenna connector, in a slot # denoted m , pertaining to dormancy indication for switching SCell1 and SCell2 from non-dormancy to dormancy. The UE shall complete switching of the SCells to dormancy by the end of slot $m + \text{ceil}(T_{\text{MultipleBWPsSwitchDelay}}/\text{NR slot length}) + 1$ in Test1 and Test2, and slot $m + \text{ceil}(T_{\text{MultipleBWPsSwitchDelay}}/\text{NR slot length}) + 2$ in Test3 and Test4, as specified in clause 8.6.2A. Any PCell interruptions due to the switching between non-dormant and dormant BWPs shall fulfill requirements in clause 8.2.2.2.12.1. The test equipment verifies that

interruptions due to switching from non-dormancy to dormancy are within the requirements by analysing HARQ feedback transmitted in PCell for PCell.

During T2, the UE is carrying out CSI and RRM measurements on dormant SCell1 and SCell2. Any PCell interruptions due to CSI and RRM measurements shall fulfill requirements in clauses 8.2.2.2.12.2 and 8.2.2.2.12.3, respectively. The test equipment verifies that the interruptions are within the allowed percentages by counting ACK/NACKs in PCell. At the end of T2, the test equipment transmits a DCI with dormancy indication on PDCCH in PCell carrying a dormancy indication for switching SCell1 and SCell2 from dormancy to non-dormancy.

T3 starts at the point in time at which the UE receives a DCI with dormancy indication on PDCCH in PCell at the antenna connector, in a slot # denoted n , pertaining to dormancy indication for switching SCell1 and SCell2 from dormancy to non-dormancy. The UE shall complete switching of the SCells to non-dormancy by the end of slot $n + \text{ceil}(T_{\text{MultipleBWPs switch Delay}}/\text{NR slot length}) + 1$ in Test1 and Test2, and slot $n + \text{ceil}(T_{\text{MultipleBWPs switch Delay}}/\text{NR slot length}) + 2$ in Test3 and test4, as specified in clause 8.6.2A. Any PCell interruptions due to the switching between dormant and non-dormant BWPs shall fulfill requirements in clause 8.2.2.2.12.1. The test equipment verifies that interruptions due to switching from dormancy to non-dormancy are within the requirements by analysing HARQ feedback transmitted in PCell for PCell. The test equipment verifies the switching delay by analysing HARQ feedback transmitted in PCell for SCells.

Table A.6.5.6.4.2.1-1: Supported test configurations for NR PCell

Config	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration.

Table A.6.5.6.4.2.1-1A: Supported test configurations for NR SCells

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥ 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥ 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration.
Note 3:	Test configurations for two NR SCells are selected independently.

Table A.6.5.6.4.2.1-2: General test parameters

Parameter	Unit	Value				Comment
		Test1	Test2	Test3	Test4	
NR RF Channel Number		1, 2, 3				Three NR radio channels are used for this test
Active PCell		Cell 1				Primary cell on NR RF channel number 1 in FR1
SCell1		Cell 2				SCell1 on NR RF channel number 2 in FR1
SCell2		Cell 3				SCell2 on NR RF channel number 3 in FR1
CP length		Normal				
DRX		OFF				Continuous monitoring of primary cell
CSI reporting periodicity, Non-dormant BWP	ms	2				CSI reporting periodicity for periodic reporting of CQI for PCell and non-dormant SCells

CSI reporting periodicity, Dormant BWP	ms	40				CSI reporting periodicity for periodic reporting of CQI for dormant SCells
Timing offset between Cell 1 and Cell 2	ns	0				
Timing offset between Cell 1 and Cell 3	ns	0				
Triggering DCI format		1_1	0_1	1_1	0_1	Triggering DCI format for triggering during active time
OFDM symbol range in slot for transmission of DCI with dormancy indication		0 – 2		3 – 11		Test1 and Test3 are based on that triggering DCI is received within the first three OFDM symbols of a slot. Test2 and Test4 are based on that the triggering DCI is received later than within the first three OFDM symbols of a slot.
T1	s	0.2				
T2	s	5				
T3	s	0.2				

Table A.6.5.6.4.2.1-3: NR Cell specific test parameters for NR Pcell

Parameter		Unit	Cell 1
Frequency range			FR1
NR RF channel			1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
BW _{channel}	Config 1,2	MHz	10: N _{RB,c} = 52
	Config 3		40: N _{RB,c} = 106
Downlink initial BWP configuration			DLBWP.0.1
Uplink initial BWP configuration			ULBWP.0.1
Downlink active non-dormant BWP-0 configuration			DLBWP.1.1
Downlink active dormant BWP-1 configuration			---
Uplink active BWP-0 configuration			ULBWP.1.1
TCI state			TCI.State.0
CSI-RS configuration for CSI reporting, Non-dormant BWP	Config 1		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS configuration for CSI reporting, Dormant BWP	Config 1		---
	Config 2		
	Config 3		
TRS Configuration	Config 1		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
Dedicated CORESET parameters, Test 1,2	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
Dedicated CORESET parameters, Test 3,4	Config 1		CCR.1.5 FDD
	Config 2		CCR.1.5 TDD
	Config 3		CCR.2.3 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD

	Config 3		CR.2.1 TDD
OCNG Pattern			OP.1
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC configuration			SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note1}			
N_{oc} ^{Note2}	Config 1,2	dBm/15kHz	-104
	Config 3		-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP ^{Note3}	Config 1,2	dBm/SCS	-87
	Config 3		-84
I_o ^{Note3}	Config 1,2	dBm/9.36 MHz	-59.0
	Config 3	dBm/38.16 MHz	-52.9
Propagation condition			AWGN
Correlation Matrix and Antenna Configuration			1x2 Low
Note 1: OCNG shall be used such that the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP, SCH_RP, and I_o levels have been derived from other parameters for information purpose. They are not settable parameters themselves.			

Table A.6.5.6.4.2.1-4: NR Cell specific test parameters for NR SCell (Cell 2)

Parameter		Unit	Cell 2
Frequency range			FR1
NR RF channel			2
Duplex mode	Config _{SCell1} 1		FDD
	Config _{SCell1} 2,3		TDD
TDD configuration	Config _{SCell1} 2		TDDConf.1.1
	Config _{SCell1} 3		TDDConf.2.1
BW _{channel}	Config _{SCell1} 1,2	MHz	10: $N_{RB,c} = 52$
	Config _{SCell1} 3		40: $N_{RB,c} = 106$
Downlink initial BWP configuration			DLBWP.0.1
Uplink initial BWP configuration			N/A
Downlink active non-dormant BWP-0 configuration			DLBWP.1.1
Downlink active dormant BWP-1 configuration			DLBWP.1.1
Uplink active BWP-0 configuration			N/A
TCI state			TCI.State.0
	Config _{SCell1} 1		CSI-RS.1.1 FDD

CSI-RS configuration for CSI reporting, Non-dormant BWP	Config _{SCell1} 2		CSI-RS.1.1 TDD
	Config _{SCell1} 3		CSI-RS.2.1 TDD
CSI-RS configuration for CSI reporting, Dormant BWP	Config _{SCell1} 1		CSI-RS.1.6 FDD
	Config _{SCell1} 2		CSI-RS.1.5 TDD
	Config _{SCell1} 3		CSI-RS.2.6 TDD
TRS Configuration	Config _{SCell1} 1		TRS.1.1 FDD
	Config _{SCell1} 2		TRS.1.1 TDD
	Config _{SCell1} 3		TRS.1.2 TDD
PDSCH Reference measurement channel	Config _{SCell1} 1		SR.1.1 FDD
	Config _{SCell1} 2		SR.1.1 TDD
	Config _{SCell1} 3		SR.2.1 TDD
Dedicated CORESET parameters, Test 1,2	Config _{SCell1} 1		CCR.1.1 FDD
	Config _{SCell1} 2		CCR.1.1 TDD
	Config _{SCell1} 3		CCR.2.1 TDD
Dedicated CORESET parameters, Test 3,4	Config _{SCell1} 1		CCR.1.1 FDD
	Config _{SCell1} 2		CCR.1.1 TDD
	Config _{SCell1} 3		CCR.2.1 TDD
RMSI CORESET parameters	Config _{SCell1} 1		N/A
	Config _{SCell1} 2		
	Config _{SCell1} 3		
OCNG Pattern			OP.1
SSB Configuration	Config _{SCell1} 1,2		SSB.1 FR1
	Config _{SCell1} 3		SSB.2 FR1
SMTC configuration			SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note1}			
N_{oc} ^{Note2}	Config _{SCell1} 1,2	dBm/15kHz	-104
	Config _{SCell1} 3		-101
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP ^{Note3}	Config _{SCell1} 1,2	dBm/SCS	-87
	Config _{SCell1} 3		-84
I_o ^{Note3}	Config _{SCell1} 1,2	dBm/9.36 MHz	-59.0
	Config _{SCell1} 3	dBm/38.16 MHz	-52.9
Propagation condition			AWGN
Correlation Matrix and Antenna Configuration			1x2 Low
Note 1: OCNG shall be used such that the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: SS-RSRP, SCH_RP, and I_o levels have been derived from other parameters for information purpose. They are not settable parameters themselves.			

Table A.6.5.6.4.2.1-5: NR Cell specific test parameters for NR SCell (Cell 3)

Parameter		Unit	Cell 3
Frequency range			FR1
NR RF channel			3
Duplex mode	Config _{SCell2} 1		FDD
	Config _{SCell2} 2,3		TDD
TDD configuration	Config _{SCell2} 2		TDDConf.1.1
	Config _{SCell2} 3		TDDConf.2.1
BW _{channel}	Config _{SCell2} 1,2	MHz	10: N _{RB,c} = 52
	Config _{SCell2} 3		40: N _{RB,c} = 106
Downlink initial BWP configuration			DLBWP.0.1
Uplink initial BWP configuration			N/A
Downlink active non-dormant BWP-0 configuration			DLBWP.1.1
Downlink active dormant BWP-1 configuration			DLBWP.1.1
Uplink active BWP-0 configuration			N/A
TCI state			TCI.State.0
CSI-RS configuration for CSI reporting, Non-dormant BWP	Config _{SCell2} 1		CSI-RS.1.1 FDD
	Config _{SCell2} 2		CSI-RS.1.1 TDD
	Config _{SCell2} 3		CSI-RS.2.1 TDD
CSI-RS configuration for CSI reporting, Dormant BWP	Config _{SCell2} 1		CSI-RS.1.6 FDD
	Config _{SCell2} 2		CSI-RS.1.5 TDD
	Config _{SCell2} 3		CSI-RS.2.6 TDD
TRS Configuration	Config _{SCell2} 1		TRS.1.1 FDD
	Config _{SCell2} 2		TRS.1.1 TDD
	Config _{SCell2} 3		TRS.1.2 TDD
PDSCH Reference measurement channel	Config _{SCell2} 1		SR.1.1 FDD
	Config _{SCell2} 2		SR.1.1 TDD
	Config _{SCell2} 3		SR.2.1 TDD
Dedicated CORESET parameters, Test 1,2	Config _{SCell2} 1		CCR.1.1 FDD
	Config _{SCell2} 2		CCR.1.1 TDD
	Config _{SCell2} 3		CCR.2.1 TDD
Dedicated CORESET parameters, Test 3,4	Config _{SCell2} 1		CCR.1.1 FDD
	Config _{SCell2} 2		CCR.1.1 TDD
	Config _{SCell2} 3		CCR.2.1 TDD
RMSI CORESET parameters	Config _{SCell2} 1		N/A
	Config _{SCell2} 2		
	Config _{SCell2} 3		
OCNG Pattern			OP.1
SSB Configuration	Config _{SCell2} 1,2		SSB.1 FR1
	Config _{SCell2} 3		SSB.2 FR1
SMTC configuration			SMTC.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^{Note1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note1}			
N _{oc} ^{Note2}	Config _{SCell2} 1,2	dBm/15kHz	-104
	Config _{SCell2} 3		-101

$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
SS-RSRP Note3	Config _{SCell2} 1,2	dBm/SCS	-87
	Config _{SCell2} 3		-84
I _o Note3	Config _{SCell2} 1,2	dBm/9.36 MHz	-59.0
	Config _{SCell2} 3	dBm/38.16 MHz	-52.9
Propagation condition			AWGN
Correlation Matrix and Antenna Configuration			1x2 Low
Note 1: OCNG shall be used such that the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP, SCH_RP, and I_o levels have been derived from other parameters for information purpose. They are not settable parameters themselves.			

A.6.5.6.4.2.2 Test Requirements

During T1, any interruption on PCell due to dormancy switching of SCells shall be within the requirement specified in clause 8.2.2.2.12.1.

During T2, interruptions on PCell due to CSI and RRM measurements on dormant SCells shall be within the interruption rate requirements specified in clauses 8.2.2.2.12.2 and 8.2.2.2.12.3, respectively.

During T3, any interruption on PCell due to dormancy switching of SCells shall be within the requirement specified in clause 8.2.2.2.12.1. Monitoring of PDCCH for SCell in SCell shall be resumed within the dormancy switching time specified in clause 8.6.2A.

For an event to be considered to be correct, all requirements above have to be fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.6.5 Simultaneous RRC-based Active BWP Switch on multiple CCs

A.6.5.6.5.1 NR FR1- NR FR1 DL active BWP switch on multiple CCs with non-DRX in SA

A.6.5.6.5.1.1 Test Purpose and Environment

The purpose of this test is to verify requirements on the RRC-based DL BWP switch delay on multiple CCs defined in clause 8.6.

The supported test configurations for NR PCell are shown in Table A.6.5.6.5.1.1-1 below. The supported test configurations for NR SCell are shown in Table A.6.5.6.5.1.1-1A below. Test configuration for NR PCell and test configuration for NR SCell are chosen independently. The test scenario comprises of one NR PCell (Cell 1) and one NR SCell (Cell 2) as given in Table A.6.5.6.5.1.1-2. NR Cell-specific parameters are specified in Table A.6.5.6.5.1.1-3 and A.6.5.6.5.1.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) and SCell (Cell 2) to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (SCell) on radio channel 2 (SCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for PCell and SCell (Cell 2).

- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PCell and SCell (Cell 2).

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration for both PCell and SCell (Cell 2), sent from the test equipment to the UE, is completely received at the UE side in PCell's and SCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition for both PCell and SCell (Cell 2).

The UE shall be able to receive PDSCH on PCell and SCell (Cell 2) from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length}$ as defined in clause 8.6.3A.1 and starts to report valid ACK/NACK for the PCell and SCell (Cell 2) from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length} + k1$ on BWP-1 of final condition. The UE shall be continuously scheduled on PCell's and SCell (Cell 2)'s BWP-1 of final condition starting from the first DL slot right after slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length}$.

$T_{RRCprocessingDelay}$, $T_{BWPswitchDelayRRC}$ and D_{RRC} are defined in clause 8.6.3A.1, N=2 in this test case.

The test equipment verifies the DL BWP switch time in PCell and SCell by counting the slots from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when a valid ACK/NACK is received.

Table A.6.5.6.5.1.1-1: DL BWP switch supported test configurations for NR PCell

Config	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration

Table A.6.5.6.5.1.1-1A: DL BWP switch supported test configurations for NR SCell

Config _{SCell}	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs ≥ the bandwidth ($BW_{channel}$) defined in each test configuration

Table A.6.5.6.5.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	

DRX		OFF	For both PCell and SCell (Cell 2)
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cell on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cell on SCC.
Cell 2 timing offset to Cell 1	μ s	3	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	0.2	

Table A.6.5.6.5.1.1-3: NR Cell specific test parameters for NR PCell for DL BWP switch in SA

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode	Config 1			FDD
	Config 2,3			TDD
TDD configuration	Config 1			Not Applicable
	Config 2			TDDConf.1.1
	Config 3			TDDConf.2.1
BW _{channel}	Config 1,2			10 MHz: N _{RB,c} = 52
	Config 3			40 MHz: N _{RB,c} = 106
Active BWP ID				1
Initial DL BWP Configuration				DLBWP.0.2 ^{Note4}
Initial UL BWP Configuration				ULBWP.0.2 ^{Note4}
Initial Condition	Active DL BWP-1 Configuration			DLBWP.1.3 ^{Note4}
	Active UL BWP-1 Configuration			ULBWP.1.3 ^{Note4}
Final Condition	Active DL BWP-1 Configuration			DLBWP.1.1 ^{Note4}
	Active UL BWP-1 Configuration			ULBWP.1.1 ^{Note4}
PDSCH Reference measurement channel	Config 1			SR.1.1 FDD
	Config 2			SR.1.1 TDD
	Config 3			SR.2.1 TDD
RMSI CORESET parameters	Config 1			CR.1.1 FDD
	Config 2			CR.1.1 TDD
	Config 3			CR.2.1 TDD
Dedicated CORESET parameters	Config 1			CCR.1.1 FDD
	Config 2			CCR.1.1 TDD
	Config 3			CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration	Config 1,2			SSB.1 FR1
	Config 3			SSB.2 FR1
SMTc Configuration				SMTc.1
TRS Configuration	Config 1			TRS.1.1 FDD
	Config 2			TRS.1.1 TDD
	Config 3			TRS.1.2 TDD
Correlation Matrix and Antenna Configuration				1x2 Low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				

N_{oc} ^{Note 2}	Config 1,2	dBm/SCS	-104
	Config 3		-101
SS-RSRP ^{Note 3}	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I_o ^{Note 3}	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

Table A.6.5.6.5.1.1-4: NR Cell specific test parameters for NR SCell for DL BWP switch in SA

Parameter			Unit	Cell 2
Frequency Range				FR1
Duplex mode		Config _{SCell} 1		FDD
		Config _{SCell} 2,3		TDD
TDD configuration		Config _{SCell} 1		Not Applicable
		Config _{SCell} 2		TDDConf.1.1
		Config _{SCell} 3		TDDConf.2.1
BW _{channel}		Config _{SCell} 1,2		10 MHz: N _{RB,c} = 52
		Config _{SCell} 3		40 MHz: N _{RB,c} = 106
Active BWP ID				1
Initial DL BWP Configuration				DLBWP.0.2 ^{Note4}
Initial UL BWP Configuration				ULBWP.0.2 ^{Note4}
Initial Condition	Active DL BWP-1 Configuration			DLBWP.1.3 ^{Note4}
	Active UL BWP-1 Configuration			ULBWP.1.3 ^{Note4}
Final Condition	Active DL BWP-1 Configuration			DLBWP.1.1 ^{Note4}
	Active UL BWP-1 Configuration			ULBWP.1.1 ^{Note4}
PDSCH Reference measurement channel		Config _{SCell} 1		SR.1.1 FDD
		Config _{SCell} 2		SR.1.1 TDD
		Config _{SCell} 3		SR.2.1 TDD
RMSI CORESET parameters		Config _{SCell} 1		CR.1.1 FDD
		Config _{SCell} 2		CR.1.1 TDD
		Config _{SCell} 3		CR.2.1 TDD
Dedicated CORESET parameters		Config _{SCell} 1		CCR.1.1 FDD
		Config _{SCell} 2		CCR.1.1 TDD
		Config _{SCell} 3		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		Config _{SCell} 1,2		SSB.1 FR1
		Config _{SCell} 3		SSB.2 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config _{SCell} 1		TRS.1.1 FDD
		Config _{SCell} 2		TRS.1.1 TDD
		Config _{SCell} 3		TRS.1.2 TDD

Correlation Matrix and Antenna Configuration			1x2 Low
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} ^{Note 2}	Config _{SCell} 1,2	dBm/SCS	-104
	Config _{SCell} 3		-101
SS-RSRP ^{Note 3}	Config _{SCell} 1,2	dBm/SCS	-87
	Config _{SCell} 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I_o ^{Note3}	Config _{SCell} 1,2	dBm/ 9.36MHz	-58.96
	Config _{SCell} 3	dBm/ 38.16MHz	-52.86
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not setttable parameters themselves.		
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].		

A.6.5.6.5.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for both PCell and SCell (Cell 2) from the first DL slot that occurs right after the beginning of slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length})$ and starts to report valid ACK/NACK for both PCell and SCell (Cell 2) from the first UL slot that occurs after the beginning of DL slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch on PCell and SCell (Cell 2) within the time duration $T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}$ defined in 8.6.3A.1.

All of the above test requirements shall be fulfilled in order for the observed PCell and SCell (Cell 2) active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.6.5.7 DL interruptions at switching between two uplink carriers

A.6.5.7.1 DL interruptions at switching between two uplink carriers in FDD-TDD CA

A.6.5.7.1.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink carriers defined in clause 8.2.2.2.10. The test case is applicable for an uplink band pair of an inter-band FDD-TDD CA configuration when the capability *uplinkTxSwitchingPeriod* is present.

There are two cells: FR1 FDD PCell (Cell 1), FR1 TDD SCell (Cell 2). The test parameters for the two cells are given in Table A.6.5.7.1.1-1, Table A.6.5.7.1.1-2 and Table A.6.5.7.1.1-3 below.

For NR FDD carrier (Cell 1), aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting 6dB on the following symbol in the slot overlapping with the 1st special slot of every radio frame of the NR TDD carrier (Cell 2):

symbol#12 if UE does not report uplinkTxSwitching-DL-Interruption-r16;

otherwise,

symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 210us or

symbol #9 if UE capability *uplinkTxSwitchingPeriod* is 140us or

symbol #10 if UE capability *uplinkTxSwitchingPeriod* is 35us.

For NR TDD carrier (Cell 2), aperiodic CSI-RS for L1-RSRP reporting is configured with power boosting 6dB on the following symbol in the 2nd special slot of every radio frame:

symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;

otherwise,

symbol #4 if UE capability *uplinkTxSwitchingPeriod* is 210us or

symbol #5 if UE capability *uplinkTxSwitchingPeriod* is 140us or

symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.

This test verifies that the UE correctly report the L1-RSRP reporting. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *uplinkTxSwitching* is indicated to UE.

Table A.6.5.7.1.1-1: Supported test configurations

Configuration	Description
1	NR Cell 1: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.6.5.7.1.1-2: General test parameters for DL interruptions at switching between two uplink carriers in FDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2
CP length		Config 1	Normal	

DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.1.5 FDD Cell 2: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A.6.5.7.1.1-3: Cell specific test parameters for DL interruptions at switching between two uplink carriers in FDD-TDD CA

Parameter		Unit	Cell1	Cell2
Frequency Range			FR1	FR1
Duplex mode	Config 1		FDD	TDD
TDD configuration	Config 1		N/A	TDDConf.2.1 except that: S=11DL: 1GP:2UL'; nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2
BW _{channel}	Config 1		10 MHz: N _{RB,c} = 52	40 MHz: N _{RB,c} = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRS configuration in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl10,6	SRS configuration in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1
SMTc Configuration			SMTc.1	SMTc.1
SSB Configuration	Config 1		SSB.1 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N _{oc} ^{Note 2}		dBm/15 kHz	-104	-104

SS-RSRP ^{Note 3}		dBm/SSB SCS	-87	-87
CSI-RS RSRP ^{Note6}		dBm/SCS	-81	-81
$\hat{E}_s/I_{ot}$		dB	17	14
$\hat{E}_s/N_{oc}$		dB	17	14
N_{oc} ^{Note 2}	Config 1	dBm/SCS	-104	-101
I_o ^{Note3} on symbols without CSI-RS	Config 1	dBm/9.36 MHz	-58.96	-
		dBm/ 38.16MHz	-	-55.78
I_o ^{Note6} on symbols with CSI-RS	Config 1	dBm/9.36 MHz	-56.58	-
		dBm/ 38.16MHz	-	-53.43
Time offset to Cell1 ^{Note 5}		μs	-	0
Propagation Condition			AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: Void				
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.				
Note 6: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.5.7.1.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.2.2.10.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.7.2 DL interruptions at switching between two uplink carriers in TDD-TDD CA

A.6.5.7.2.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink carriers defined in clause 8.2.2.2.10. The test case is applicable for an uplink band pair of an inter-band TDD-TDD CA configuration when the capability *uplinkTxSwitchingPeriod* is present.

There are two cells: FR1 TDD PCell (Cell 1), FR1 TDD SCell (Cell 2). The test parameters for the two cells are given in Table A.6.5.7.2.1-1, Table A.6.5.7.2.1-2 and Table A.6.5.7.2.1-3 below.

For NR TDD PCell (Cell 1), aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting 6dB on the following symbol in the 1st special slot of every radio frame:

symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;

otherwise,

symbol #4 if UE capability *uplinkTxSwitchingPeriod* is 210us or

symbol #5 if UE capability *uplinkTxSwitchingPeriod* is 140us or

symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.

For NR TDD SCell (Cell 2), aperiodic CSI-RS for L1-RSRP reporting is configured with power boosting 6dB on the following symbol on the 2nd special slot of every radio frame:

symbol#10 if UE does not report *uplinkTxSwitching-DL-Interruption-r16*;

otherwise,

symbol #4 if UE capability *uplinkTxSwitchingPeriod* is 210us or

symbol #5 if UE capability *uplinkTxSwitchingPeriod* is 140us or

symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.

This test verifies that the UE correctly report the L1-RSRP reporting. The test case is only applicable to UE which supports *simultaneousRxTxInterBandCA*.

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *uplinkTxSwitching* is indicated to UE.

Table A.6.5.7.2.1-1: Supported test configurations

Configuration	Description
1	NR Cell 1: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.6.5.7.2.1-2: General test parameters for DL interruptions at switching between two uplink carriers in TDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.2.5 TDD Cell 2: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A.6.5.7.2.1-3: Cell specific test parameters for DL interruptions at switching between two uplink carriers in TDD-TDD CA

Parameter	Unit	Cell1	Cell2
Frequency Range		FR1	FR1
Duplex mode	Config 1	TDD	TDD
TDD configuration	Config 1	TDDConf.2.1 except that S=1 1DL: :2UL'; <i>nrofDownlinkSymbols: 11</i> <i>nrofUplinkSymbols: 2</i>	TDDConf.2.2
BW _{channel}	Config 1	40 MHz: N _{RB,c} = 106	40 MHz: N _{RB,c} = 106

Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRS configuration in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,5	SRS configuration in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2
PDSCH Reference measurement channel	Config 1		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note 2}		dBm/15 kHz	-104	-104
SS-RSRP ^{Note 3}		dBm/SSB SCS	-87	-87
CSI-RS RSRP ^{Note 6}		dBm/SCS	-81	-81
$\hat{E}_s/I_{ot}$		dB	14	14
$\hat{E}_s/N_{oc}$		dB	14	14
N_{oc} ^{Note 2}	Config 1	dBm/SCS	-104	-101
I_{o} ^{Note 3} on symbols without CSI-RS	Config 1	dBm/38.16MHz	-55.78	-55.78
I_{o} ^{Note 6} on symbols with CSI-RS	Config 1	dBm/38.16MHz	-53.43	-53.43
Time offset to Cell1 ^{Note 5}		μ s	-	0
Propagation Condition			AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Void Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells. Note 6: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.5.7.2.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.2.2.10.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.7A DL interruptions at switching between two uplink carriers with two transmit antenna connectors

A.6.5.7A.1 DL interruptions at switching between two uplink carriers in FDD-TDD CA

A.6.5.7A.1.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink carriers defined in clause 8.2.2.2.10A. The test case is applicable for an uplink band pair of an inter-band FDD-TDD CA configuration when the capability *uplinkTxSwitchingPeriod2T2T* is present, where NR UL carrier 1 is capable of two transmit antenna connectors and NR UL carrier 2 is capable of two transmit antenna connectors, and the two uplink carriers are in different bands with different carrier frequencies.

There are two cells: FR1 FDD PCell (Cell 1), FR1 TDD SCell (Cell 2). The test parameters for the two cells are given in Table A.6.5.7A.1.1-1, Table A.6.5.7A.1.1-2 and Table A.6.5.7A.1.1-3 below.

For NR FDD carrier (Cell 1), aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting [6dB] on the following symbol in the slot overlapping with the 1st special slot of every radio frame of the NR TDD carrier (Cell 2):

- symbol#12 if UE does not report *uplinkTxSwitching-DL-Interruption-r16*;
- otherwise,
 - symbol #8 if UE capability *uplinkTxSwitchingPeriod2T2T* is 210us or
 - symbol #9 if UE capability *uplinkTxSwitchingPeriod2T2T* is 140us or
 - symbol #10 if UE capability *uplinkTxSwitchingPeriod2T2T* is 35us.

For NR TDD carrier (Cell 2), aperiodic CSI-RS for L1-RSRP reporting is configured with power boosting [6dB] on the following symbol in the 2nd special slot of every radio frame:

- symbol#10 if UE does not report *uplinkTxSwitching-DL-Interruption-r16*;
- otherwise,
 - symbol #4 if UE capability *uplinkTxSwitchingPeriod2T2T* is 210us or
 - symbol #5 if UE capability *uplinkTxSwitchingPeriod2T2T* is 140us or
 - symbol #8 if UE capability *uplinkTxSwitchingPeriod2T2T* is 35us.

This test verifies that the UE correctly report the L1-RSRP reporting. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *uplinkTxSwitching* is indicated to UE.

Table A.6.5.7A.1.1-1: Supported test configurations

Configuration	Description
1	NR Cell 1: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.6.5.7A.1.1-2: General test parameters for DL interruptions at switching between two uplink carriers in FDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.1.5 FDD Cell 2: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A.6.5.7A.1.1-3: Cell specific test parameters for DL interruptions at switching between two uplink carriers in FDD-TDD CA

Parameter	Unit	Cell1	Cell2
Frequency Range		FR1	FR1
Duplex mode	Config 1	FDD	TDD
TDD configuration	Config 1	N/A	TDDConf.2.1 except that: S='11DL: 1GP:2UL'; nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2
BW _{channel}	Config 1	10 MHz: N _{RB,C} = 52	40 MHz: N _{RB,C} = 106
Initial BWP Configuration	Config 1	DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1	DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1	ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1	SRSCConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl10,6 nrofSRS-Ports: ports2	SRSCConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2
PDSCH Reference measurement channel	Config 1	SR.1.1 FDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1	CR.1.1 FDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1	CCR.1.1 FDD	CCR.2.1 TDD
OCNG Patterns		OP.1	OP.1
SMTC Configuration		SMTC.1	SMTC.1

SSB Configuration	Config 1		SSB.1 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			2x2 Low	2x2 Low
EPRE ratio of PSS to SSS	dB		0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note 2}		dBm/15 kHz	-104	-104
SS-RSRP ^{Note 3}		dBm/SCS	-87	-87
$\hat{E}_s/I_{ot}$		dB	17	14
$\hat{E}_s/N_{oc}$		dB	17	14
N_{oc} ^{Note 2}	Config 1	dBm/SCS	-104	-101
I_o ^{Note 3}	Config 1	dBm/9.36 MHz	-58.96	-
		dBm/38.16MHz	-	-55.78
Time offset to Cell1 ^{Note 5}		μ s	-	0
Propagation Condition			AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Void Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.				

A.6.5.7A.1.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.2.2.10A.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.7A.2 DL interruptions at switching between two uplink carriers in TDD-TDD CA

A.6.5.7A.2.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink carriers defined in clause 8.2.2.2.10A. The test case is applicable for an uplink band pair of an inter-band TDD-TDD CA configuration when the capability *uplinkTxSwitchingPeriod2T2T* is present, where NR UL carrier 1 is capable of two transmit antenna connectors and NR UL carrier 2 is capable of two transmit antenna connectors, and the two uplink carriers are in different bands with different carrier frequencies.

There are two cells: FR1 TDD PCell (Cell 1), FR1 TDD SCell (Cell 2). The test parameters for the two cells are given in Table A.6.5.7A.2.1-1, Table A.6.5.7A.2.1-2 and Table A.6.5.7A.2.1-3 below.

For NR TDD PCell (Cell 1), aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting [6dB] on the following symbol in the 1st special slot of every radio frame:

- symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;
- otherwise,
 - symbol #4 if UE capability *uplinkTxSwitchingPeriod2T2T* is 210us or
 - symbol #5 if UE capability *uplinkTxSwitchingPeriod2T2T* is 140us or
 - symbol #8 if UE capability *uplinkTxSwitchingPeriod2T2T* is 35us.

For NR TDD SCell (Cell 2), aperiodic CSI-RS for L1-RSRP reporting is configured with power boosting [6dB] on the following symbol on the 2nd special slot of every radio frame:

- symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;
- otherwise,
 - symbol #4 if UE capability *uplinkTxSwitchingPeriod2T2T* is 210us or
 - symbol #5 if UE capability *uplinkTxSwitchingPeriod2T2T* is 140us or
 - symbol #8 if UE capability *uplinkTxSwitchingPeriod2T2T* is 35us.

This test verifies that the UE correctly report the L1-RSRP reporting. The test case is only applicable to UE which supports *simultaneousRxTxInterBandCA*.

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *uplinkTxSwitching* is indicated to UE.

Table A.6.5.7A.2.1-1: Supported test configurations

Configuration	Description
1	NR Cell 1: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.6.5.7A.2.1-2: General test parameters for DL interruptions at switching between two uplink carriers in TDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.2.5 TDD Cell 2: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A.6.5.7A.2.1-3: Cell specific test parameters for DL interruptions at switching between two uplink carriers in TDD-TDD CA

Parameter		Unit	Cell1	Cell2
Frequency Range			FR1	FR1
Duplex mode	Config 1		TDD	TDD
TDD configuration	Config 1		TDDConf.2.1 except that S='1 1DL: :2UL'; nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2	TDDConf.2.2
BW _{channel}	Config 1		40 MHz: N _{RB,C} = 106	40 MHz: N _{RB,C} = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRSCnf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,5 nrofSRS-Ports: ports2	SRSCnf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2
PDSCH Reference measurement channel	Config 1		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			2x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N _{oc} ^{Note 2}		dBm/15 kHz	-104	-104
SS-RSRP ^{Note 3}		dBm/SCS	-87	-87
$\hat{E}_s/I_{ot}$		dB	14	14
$\hat{E}_s/N_{oc}$		dB	14	14
N _{oc} ^{Note 2}	Config 1	dBm/SCS	-101	-101
I _o ^{Note3}	Config 1	dBm/38.16MHz	-55.78	-55.78
Time offset to Cell1 ^{Note 5}		μs	-	0
Propagation Condition			AWGN	AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

A.6.5.7A.2.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.2.2.10A.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.7B DL interruptions at switching between one uplink band with one transmit antenna connector and one uplink band with two transmit antenna connectors

A.6.5.7B.1 DL interruptions at switching between two uplink bands in FDD-TDD CA

A.6.5.7B.1.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink bands defined in clause 8.2.2.2.10B. The test case is applicable for an uplink band pair of an inter-band UL CA configuration when the capability *uplinkTxSwitchingPeriod* is present, where NR UL carrier 1 in band A is capable of one transmit antenna connector, NR UL carrier 2 and carrier 3 in band B are capable of two transmit antenna connectors. NR UL carrier 2 and carrier 3 are two contiguous aggregated carriers, and band A and band B are different bands with different carrier frequencies.

There are three cells: FR1 FDD PCell (Cell 1), FR1 TDD SCell (Cell 2) and FR1 TDD SCell (Cell 3) where cell 1 in band A is with 1Tx, cell2 and cell 3 in band B with 2Tx, cell2 and cell3 are two contiguous aggregated carriers. The test parameters for the three cells are given in Table A.6.5.7B.1.1-1, Table A.6.5.7B.1.1-2 and Table A.6.5.7B.1.1-3 below.

For NR FDD carrier (Cell 1), aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting 6dB on the following symbol in the slot overlapping with the 1st special slot of every radio frame of the NR TDD carrier (Cell 2):

- symbol#12 if UE does not report uplinkTxSwitching-DL-Interruption-r16;
- otherwise,
 - symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 210us or
 - symbol #9 if UE capability *uplinkTxSwitchingPeriod* is 140us or
 - symbol #10 if UE capability *uplinkTxSwitchingPeriod* is 35us.

For NR TDD Cell 2 and NR TDD Cell 3, aperiodic CSI-RS for L1-RSRP reporting is configured with power boosting 6dB on the following symbol in the 2nd special slot of every radio frame:

- symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption-r16;

- otherwise,
- symbol #4 if UE capability *uplinkTxSwitchingPeriod* is 210us or
- symbol #5 if UE capability *uplinkTxSwitchingPeriod* is 140us or
- symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.

This test verifies that the UE correctly report the L1-RSRP reporting. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *uplinkTxSwitching* is indicated to UE.

Table A.6.5.7B.1.1-1: Supported test configurations

Configuration	Description
1	NR Cell 1: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 3: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.6.5.7B.1.1-2: General test parameters for DL interruptions at switching between two uplink bands in FDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2, 3	Three radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell Cell 3: FR1 SCell	Cell1: FR1 PCell on RF channel number 1 in band A Cell 2: FR1 SCell on RF channel number 2 in band B Cell 3: FR1 SCell on RF channel number 3 in band B Note: Cell 2 and Cell 3 are two contiguous aggregated carriers
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.1.5 FDD Cell 2: CSI-RS.2.5 TDD Cell 3: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A.6.5.7B.1.1-3: Cell specific test parameters for DL interruptions at switching between two uplink bands in FDD-TDD CA

Parameter	Unit	Cell1	Cell2	Cell3
Frequency Range		FR1	FR1	FR1
Duplex mode	Config 1	FDD	TDD	TDD
TDD configuration	Config 1	N/A	TDDConf.2.1 except that: S='11DL: 1GP:2UL'; <i>nrofDownlinkSymbols</i> : 11 <i>nrofUplinkSymbols</i> : 2	TDDConf.2.1 except that: S='11DL: 1GP:2UL'; <i>nrofDownlinkSymbols</i> : 11 <i>nrofUplinkSymbols</i> : 2
BW _{channel}	Config 1	10 MHz: N _{RB,c} = 52	40 MHz: N _{RB,c} = 106	40 MHz: N _{RB,c} = 106
Initial BWP Configuration	Config 1	DLBWP.0.1	DLBWP.0.1	DLBWP.0.1

DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRSCConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl10,6	SRSCConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2	SRSCConf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.1 FR1	SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			1x2 Low	2x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} ^{Note 2}		dBm/15 kHz	-104	-104	-104
SS-RSRP ^{Note 3}		dBm/SCS	-87	-87	-87
$\bar{E}_s/I_{ot}$		dB	17	14	14
$\bar{E}_s/N_{oc}$		dB	17	14	14
N_{oc} ^{Note 2}	Config 1	dBm/SCS	-104	-101	-101
I_0 ^{Note 3}	Config 1	dBm/9.36 MHz	-58.96	-	-
		dBm/38.16M Hz	-	-55.79	-55.79
Time offset to Cell1 ^{Note 5}		μ s	-	0	0
Propagation Condition			AWGN	AWGN	AWGN

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.

A.6.5.7B.1.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.2.2.10B.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.7B.2 DL interruptions at switching between two uplink bands in TDD-TDD CA

A.6.5.7B.2.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink bands defined in clause 8.2.2.2.10B. The test case is applicable for an uplink band pair of an inter-band UL CA configuration when the capability *uplinkTxSwitchingPeriod* is present, where NR UL carrier 1 in band A is capable of one transmit antenna connector, NR UL carrier 2 and carrier 3 in band B are capable of two transmit antenna connectors. NR UL carrier 2 and carrier 3 are two contiguous aggregated carriers, and band A and band B are different bands with different carrier frequencies.

There are three cells: FR1 TDD PCell (Cell 1), FR1 TDD SCell (Cell 2) and FR1 TDD SCell (Cell 3) where cell 1 in band A is with 1Tx, cell2 and cell 3 in band B with 2Tx, cell2 and cell3 are two contiguous aggregated carriers. The test parameters for the three cells are given in Table A.6.5.7B.2.1-1, Table A.6.5.7B.2.1-2 and Table A.6.5.7B.2.1-3 below.

For NR TDD PCell (Cell 1), aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting 6dB on the following symbol in the 1st special slot of every radio frame:

- symbol#10 if UE does not report *uplinkTxSwitching-DL-Interruption-r16*;
- otherwise,
 - symbol #4 if UE capability *uplinkTxSwitchingPeriod* is 210us or
 - symbol #5 if UE capability *uplinkTxSwitchingPeriod* is 140us or
 - symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.

For NR TDD Cell 2 and NR TDD Cell 3, aperiodic CSI-RS for L1-RSRP reporting is configured with power boosting 6dB on the following symbol on the 2nd special slot of every radio frame:

- symbol#10 if UE does not report *uplinkTxSwitching-DL-Interruption-r16*;
- otherwise,
 - symbol #4 if UE capability *uplinkTxSwitchingPeriod* is 210us or
 - symbol #5 if UE capability *uplinkTxSwitchingPeriod* is 140us or
 - symbol #8 if UE capability *uplinkTxSwitchingPeriod* is 35us.

This test verifies that the UE correctly report the L1-RSRP reporting. The test case is only applicable to UE which supports *simultaneousRxTxInterBandCA*.

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, *uplinkTxSwitching* is indicated to UE.

Table A.6.5.7B.2.1-1: Supported test configurations

Configuration	Description
1	NR Cell 1: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 3: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.6.5.7B.2.1-2: General test parameters for DL interruptions at switching between two uplink bands in TDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2, 3	Two radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell Cell 3: FR1 SCell	Cell1: FR1 PCell on RF channel number 1 in band A Cell 2: FR1 SCell on RF channel number 2 in band B Cell 3: FR1 SCell on RF channel number 3 in band B Note: Cell 2 and Cell 3 are two contiguous aggregated carriers
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.2.5 TDD Cell 2: CSI-RS.2.5 TDD Cell 3: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A.6.5.7B.2.1-3: Cell specific test parameters for DL interruptions at switching between two uplink bands in TDD-TDD CA

Parameter	Unit	Cell1	Cell2	Cell3
Frequency Range		FR1	FR1	FR1
Duplex mode	Config 1	TDD	TDD	TDD
TDD configuration	Config 1	TDDConf.2.1 except that S='1 1DL: :2UL'; <i>nrofDownlinkSymbols</i> : 11 <i>nrofUplinkSymbols</i> : 2	TDDConf.2.2	TDDConf.2.2
BW _{channel}	Config 1	40 MHz: N _{RB,c} = 106	40 MHz: N _{RB,c} = 106	40 MHz: N _{RB,c} = 106
Initial BWP Configuration	Config 1	DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1	DLBWP.1.1	DLBWP.1.1	DLBWP.1.1

UL dedicated BWP configuration		Config 1		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
SRS configuration		Config 1		SRSCnf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrOfSymbols: n2 periodicityAndOffset-p: sl20,5	SRSCnf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrOfSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2	SRSCnf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrOfSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2
PDSCH Reference measurement channel		Config 1		SR.2.1 TDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters		Config 1		CR.2.1 TDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters		Config 1		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns				OP.1	OP.1	OP.1
SMTC Configuration				SMTC.1	SMTC.1	SMTC.1
SSB Configuration		Config 1		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration				1x2 Low	2x2 Low	2x2 Low
EPRE ratio of PSS to SSS			dB	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N _{oc} ^{Note 2}			dBm/15 kHz	-104	-104	-104
SS-RSRP ^{Note 3}			dBm/SCS	-87	-87	-87
E _s /I _{ot}			dB	14	14	14
E _s /N _{oc}			dB	14	14	14
N _{oc} ^{Note 2}		Config 1	dBm/SCS	-101	-101	-101
I _o ^{Note3}		Config 1		-	-	-
			dBm/38.16MHz	- 55.79	-55.79	-55.79
Time offset to Cell1 ^{Note 5}			μs	-	0	0
Propagation Condition				AWGN	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.						
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Void						
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.						

A.6.5.7B.2.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.2.2.10B.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.7C DL interruptions at switching between two uplink bands with two transmit antenna connectors

A.6.5.7C.1 DL interruptions at switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA

A.6.5.7C.1.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink bands with two transmit antenna connectors defined in clause 8.2.2.2.10C. The test case is applicable for an uplink band pair of an inter-band FDD-TDD CA configuration when the capability [*uplinkTxSwitchingPeriod2T2T*] is present, where NR UL carrier 1 in band A is capable of two transmit antenna connector, NR UL carrier 2 and carrier 3 in band B are capable of two transmit antenna connectors. NR UL carrier 2 and carrier 3 are two contiguous aggregated carriers, and band A and band B are different bands with different carrier frequencies.

There are three cells: FR1 FDD PCell (Cell 1), FR1 TDD SCell (Cell 2) and FR1 TDD SCell (Cell 3) where cell 1 in band A is with 2Tx, cell2 and cell 3 in band B with 2Tx, cell2 and cell3 are two contiguous aggregated carriers. The test parameters for the three cells are given in Table A.6.5.7C.1.1-1, Table A.6.5.7C.1.1-2 and Table A.6.5.7C.1.1-3 below.

For NR FDD carrier (Cell 1), aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting 6dB on the following symbol in the slot overlapping with the 1st special slot of every radio frame of the NR TDD carrier (Cell 2) and NR TDD carrier (Cell 3):

- symbol#12 if UE does not report uplinkTxSwitching-DL-Interruption;
- otherwise,
 - symbol #8 if UE capability [*uplinkTxSwitchingPeriod2T2T*] is 210us or
 - symbol #9 if UE capability [*uplinkTxSwitchingPeriod2T2T*] is 140us or
 - symbol #10 if UE capability [*uplinkTxSwitchingPeriod2T2T*] is 35us.

For NR TDD carrier (Cell 2) and NR TDD carrier (Cell 3), aperiodic CSI-RS for L1-RSRP reporting is configured with power boosting 6dB on the following symbol in the 2nd special slot of every radio frame:

- symbol#10 if UE does not report [uplinkTxSwitching-DL-Interruption];
- otherwise,
 - symbol #4 if UE capability [*uplinkTxSwitchingPeriod2T2T*] is 210us or
 - symbol #5 if UE capability [*uplinkTxSwitchingPeriod2T2T*] is 140us or
 - symbol #8 if UE capability [*uplinkTxSwitchingPeriod2T2T*] is 35us.

This test verifies that the UE correctly report the L1-RSRP reporting. The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, [*uplinkTxSwitchingPeriod2T2T*] is indicated to UE.

Table A.6.5.7C.1.1-1: Supported test configurations

Configuration	Description
1	NR Cell 1: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

	NR Cell 3: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
--	--

Table A.6.5.7C.1.1-2: General test parameters for DL interruptions at switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2, 3	Three radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell Cell 3: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2 FR1 SCell on RF channel number 3
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.1.5 FDD Cell 2: CSI-RS.2.5 TDD Cell 3: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A.6.5.7C.1.1-3: Cell specific test parameters for DL interruptions at switching between two uplink bands with two transmit antenna connectors in FDD-TDD CA

Parameter	Unit	Cell1	Cell2	Cell3
Frequency Range		FR1	FR1	FR1
Duplex mode	Config 1	FDD	TDD	TDD
TDD configuration	Config 1	N/A	TDDConf.2.1 except that: S='11DL: 1GP:2UL'; <i>nrofDownlinkSymbols</i> : 11 <i>nrofUplinkSymbols</i> : 2	TDDConf.2.1 except that: S='11DL: 1GP:2UL'; <i>nrofDownlinkSymbols</i> : 11 <i>nrofUplinkSymbols</i> : 2
BW _{channel}	Config 1	10 MHz: N _{RB,c} = 52	40 MHz: N _{RB,c} = 106	40 MHz: N _{RB,c} = 106
Initial BWP Configuration	Config 1	DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1	DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1	ULBWP.1.1	ULBWP.1.1	ULBWP.1.1

SRS configuration	Config 1		SRSCnf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl10,6 nrofSRS-Ports: ports2	SRSCnf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2	SRSCnf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.1 FR1	SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			2x2 Low	2x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} ^{Note 2}		dBm/15 kHz	-104	-104	-104
SS-RSRP ^{Note 3}		dBm/SCS	-87	-87	-87
$\hat{E}_s/I_{ot}$		dB	17	14	14
$\hat{E}_s/N_{oc}$		dB	17	14	14

N_{oc} ^{Note 2}	Config 1	dBm/S CS	-104	-101	-101
I_o ^{Note3}	Config 1	dBm/9.36 MHz	-58.96	-	-
		dBm/38.16M Hz	-	-55.79	-55.79
Time offset to Cell1 Note 5		μs	-	0	0
Propagation Condition			AWGN	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: Void					
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.					

A.6.5.7C.1.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.2.2.10C.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.7C.2 DL interruptions at switching between two uplink bands with two transmit antenna connectors in TDD-TDD CA

A.6.5.7C.2.1 Test Purpose and Environment

The purpose of this test is to verify DL interruption requirements during UE dynamic switching between two uplink carriers defined in clause 8.2.2.2.10C. The test case is applicable for an uplink band pair of an inter-band TDD-TDD CA configuration when the capability [*uplinkTxSwitchingPeriod2T2T*] is present, where NR UL carrier 1 in band A is capable of two transmit antenna connector, NR UL carrier 2 and carrier 3 in band B are capable of two transmit antenna connectors. NR UL carrier 2 and carrier 3 are two contiguous aggregated carriers, and band A and band B are different bands with different carrier frequencies.

There are three cells: FR1 TDD PCell (Cell 1), FR1 TDD SCell (Cell 2) and FR1 TDD SCell (Cell 3) where cell 1 in band A is with 2Tx, cell2 and cell 3 in band B with 2Tx, cell2 and cell3 are two contiguous aggregated carriers. The test parameters for the three cells are given in Table A.6.5.7C.2.1-1, Table A.6.5.7C.2.1-2 and Table A.6.5.7C.2.1-3 below.

For NR TDD PCell (Cell 1), aperiodic CSI-RS for L1-RSRP reporting is triggered with power boosting 6dB on the following symbol in the 1st special slot of every radio frame:

- symbol#10 if UE does not report uplinkTxSwitching-DL-Interruption;
- otherwise,
- symbol #4 if UE capability [*uplinkTxSwitchingPeriod2T2T*] is 210us or

- symbol #5 if UE capability [*uplinkTxSwitchingPeriod2T2T*] is 140us or
- symbol #8 if UE capability [*uplinkTxSwitchingPeriod2T2T*] is 35us.

For NR TDD SCell (Cell 2) and NR TDD SCell (Cell 3), aperiodic CSI-RS for L1-RSRP reporting is configured with power boosting [6dB] on the following symbol on the 2nd special slot of every radio frame:

- symbol#10 if UE does not report [*uplinkTxSwitching-DL-Interruption*];
- otherwise,
 - symbol #4 if UE capability [*uplinkTxSwitchingPeriod2T2T*] is 210us or
 - symbol #5 if UE capability [*uplinkTxSwitchingPeriod2T2T*] is 140us or
 - symbol #8 if UE capability [*uplinkTxSwitchingPeriod2T2T*] is 35us.

This test verifies that the UE correctly report the L1-RSRP reporting. The test case is only applicable to UE which supports *simultaneousRxTxInterBandCA*.

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, [*uplinkTxSwitchingPeriod2T2T*] is indicated to UE.

Table A.6.5.7C.2.1-1: Supported test configurations

Configuration	Description
1	NR Cell 1: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 2: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR Cell 3: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.6.5.7C.2.1-2: General test parameters for DL interruptions at switching between two uplink bands with two transmit antenna connectors in TDD-TDD CA

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2, 3	Three radio channels are used for this test.
Active cell		Config 1	Cell 1: FR1 PCell Cell 2: FR1 SCell Cell 3: FR1 SCell	FR1 PCell on RF channel number 1 FR1 SCell on RF channel number 2 FR1 SCell on RF channel number 3
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	
Filter coefficient		Config 1	0	L3 filtering is not used
CSI-RS configuration for L1-RSRP reporting		Config 1	Cell 1: CSI-RS.2.5 TDD Cell 2: CSI-RS.2.5 TDD Cell 3: CSI-RS.2.5 TDD	
T1	s	Config 1	5	

Table A.6.5.7C.2.1-3: Cell specific test parameters for DL interruptions at switching between two uplink bands with two transmit antenna connectors in TDD-TDD CA

Parameter	Unit	Cell1	Cell2	Cell3
Frequency Range		FR1	FR1	FR1

Duplex mode	Config 1		TDD	TDD	TDD
TDD configuration	Config 1		TDDConf.2.1 except that S='1 1DL: :2UL'; nrofDownlinkSymbols: 11 nrofUplinkSymbols: 2	TDDConf.2.2	TDDConf.2.2
BW _{channel}	Config 1		40 MHz: N _{RB,c} = 106	40 MHz: N _{RB,c} = 106	40 MHz: N _{RB,c} = 106
Initial BWP Configuration	Config 1		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
SRS configuration	Config 1		SRSCnf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,5 nrofSRS-Ports: ports2	SRSCnf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2	SRSCnf.1 in Table A.4.4.1.1.1-3 is applied except that: resourceMappingstartPosition: 0 resourceMappingnrofSymbols: n2 periodicityAndOffset-p: sl20,3 nrofSRS-Ports: ports2
PDSCH Reference measurement channel	Config 1		SR.2.1 TDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET parameters	Config 1		CR.2.1 TDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET parameters	Config 1		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1	OP.1
SMTC Configuration			SMTC.1	SMTC.1	SMTC.1
SSB Configuration	Config 1		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Correlation Matrix and Antenna Configuration			2x2 Low	2x2 Low	2x2 Low
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					

EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N _{oc} ^{Note 2}		dBm/15 kHz	-104	-104	-104
SS-RSRP ^{Note 3}		dBm/SC S	-87	-87	-87
E _s /I _{ot}		dB	14	14	14
E _s /N _{oc}		dB	14	14	14
N _{oc} ^{Note 2}	Config 1	dBm/SC S	-101	-101	-101
I _o ^{Note3}	Config 1			-	-
		dBm/38.16M Hz	-55.79	-55.79	-55.79
Time offset to Cell1 ^{Note 5}		μs	-	0	0
Propagation Condition			AWGN	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.					
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: Void					
Note 5: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.					

A.6.5.7C.2.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.2.2.2.10C.

UE shall send L1-RSRP report while meeting the accuracy requirements defined in clause 10.1.19.2.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.8 UE specific CBW change

A.6.5.8.1 UE specific CBW change on PCell in FR1 in non-DRX

A.6.5.8.1.1 Test Purpose and Environment

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13.

The supported test configurations are shown in Table A.6.5.8.1.1-1. The test scenario comprises of one Cell (Cell 1), which is PCell as given in Table A.6.5.8.1.1-2. Cell-specific parameters are specified in Table A.6.5.8.1.1-3.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE sends ACK/NACK during the test.

Before the test starts:

- UE is connected to Cell 1 (PCell) on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PCell.
- UE has been configured with UE specific CBW (CBW-1).
- UE is indicated in *SCS-SpecificCarrier* [2] that the UE specific CBW is CBW-1 as the initial condition in Cell 1 (PCell).

Cell1 (PCell) has constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* containing *SCS-SpecificCarrier* with updated UE specific CBW, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its UE specific CBW with the updated CBW-2 for the final condition.

The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ as defined in clause 8.13 and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1$ on the PCell's BWP-1 on CBW-2 for the final condition. The UE shall be continuously scheduled on the PCell's BWP-1 on CBW-2 for the final condition starting from the first DL slot right after slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$.

$T_{RRCprocessingDelay}$ and $T_{CBWchangeDelayRRC}$ are defined in clause 8.13.

The test equipment verifies the UE specific CBW switching delay in PCell by estimating the time from the moment the RRC Reconfiguration message including updated UE specific CBW configuration is sent until the moment a valid ACK/NACK is received.

Table A.6.5.8.1.1-1: Supported test configurations for UE specific CBW change in SA scenario

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.6.5.8.1.1-2: General test parameters for UE specific CBW change in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

Table A.6.5.8.1.1-3: NR Cell specific test parameters for UE specific CBW change in SA scenario

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1		FDD
		Config 2,3		TDD
TDD configuration		Config 1		Not Applicable
		Config 2		TDDConf.1.1
		Config 3		TDDConf.2.1
BW _{channel}		Config 1		10 MHz: N _{RB,c} = 52
		Config 2		10 MHz: N _{RB,c} = 52
		Config 3		40 MHz: N _{RB,c} = 106
Active DL BWP ID		Config 1,2, 3		1
Initial DL BWP Configuration (BWP-1)		Config 1,2, 3		DLBWP.0.2
Initial UL BWP Configuration		Config 1,2, 3		ULBWP.0.2
Initial Condition	ActiveDL CBW-1 Configuration	Config 1, 2, 3		DLCBW.1.1
	Active UL CBW-1 Configuration			ULCBW.1.1
Final Condition	Active DL CBW-2 Configuration	Config 1, 2, 3		DLCBW.1.2
	Active UL CBW-2 Configuration			ULCBW.1.2
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD
		Config 2		SR.1.1 TDD
		Config 3		SR2.1 TDD
RMSI CORESET parameters		Config 1		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR2.1 TDD
Dedicated CORESET parameters		Config 1		CCR.1.1 FDD
		Config 2		CCR.1.1 TDD
		Config 3		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2		SSB.1 FR1
		Config 3		SSB.2 FR1
SMTc Configuration				SMTc.1
TRS Configuration		Config 1		TRS.1.1 FDD
		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
Antenna Configuration				1x2 Low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS ^(Note 1)				
EPRE ratio of OCNG to OCNG DMRS ^(Note 1)				
N _{oc} ^{Note 2}		Config 1,2		

	Config 3		-101
SS-RSRP ^{Note 3}	Config 1,2	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I_o ^{Note3}	Config 1,2	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.1 is linked with ULBWP.0.1; DLBWP.1.1 is linked with ULBWP.1.1; as defined in clause 12 of TS 38.213 [3].			

A.6.5.8.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the PCell from the first DL slot that occurs right after the beginning of slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed UE specific CBW change delay on the PCell to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.5.9 Pathloss reference signal switching delay

A.6.5.9.1 MAC-CE based pathloss reference signal switch delay

A.6.5.9.1.1 Test Purpose and Environment

The purpose of this test is to verify the MAC-CE based pathloss reference signal switch delay requirement defined in clause 8.14.

The supported test configurations are shown in Table A.6.5.9.1.1-1. The test scenario comprises of one cell (Cell 1) as given in Table A.6.5.9.1.1-2. Cell-specific parameters of the cell are specified in Table A.6.5.9.1.1-3 below.

The test consists of 3 successive time periods, with duration of T1, T2 and T3, respectively.

Prior to the start of the time duration T1,

- UE is connected to Cell 1 on radio channel 1.
- UE shall be fully synchronized to SSB #0.

During T1,

- The UE shall track SSB #1 so that SSB #1 as a pathloss reference signal is known to the UE.

Time period T2 starts when the UE is configured of the power headroom reporting functionality by upper layers by the test equipment and the UE shall transmit a PHR during T2.

During T2,

- UE is configured with a *phr-ProhibitTimer* timer value for Cell 1.
- UE is configured with a *phr-Tx-PowerFactorChange* value for Cell 1.

During T3,

Time period T3 starts when a PDSCH carrying MAC-CE activation for pathloss reference signal switch, sent from the test equipment to the UE to switch the pathloss reference signal from SSB 0 to SSB 1, is received at the UE side in Cell1's slot # denoted i . The UE shall switch its pathloss reference signal to the target one and send PHR.

The UE shall be able to apply the target pathloss reference signal of the serving cell on which pathloss reference signal switch occurs no later than the slot $i + T_{HARQ} + \left\lceil \frac{3\text{ms} + 5 \cdot T_{\text{target_PL-RS}} + 2\text{ms}}{\text{NR slot length}} \right\rceil$ as defined in clause 8.14. The UE shall be able to apply old pathloss reference signals until the slot $i + T_{HARQ} + 3N_{\text{slot}}^{\text{subframe},\mu}$ as defined in clause 8.14.

The test equipment verifies the pathloss RS switch time by counting the slots from the time when the pathloss RS switch command is transmitted till a PHR is received during T3.

Table A.6.5.9.1.1-1: MAC-CE based pathloss reference signal switch supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.5.9.1.1-2: General test parameters for MAC-CE based pathloss reference signal switch in SA

Parameter	Unit	Value	Comment
Active PCell		Cell 1	
RF Channel Number		1	
Duplex mode	Config 1	FDD	
	Config 2, 3	TDD	
DL initial BWP configuration	Config 1, 2, 3	DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3	DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3	ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3	ULBWP.1.1	
TDD Configuration	Config 1	Not Applicable	
	Config 2	TDDConf.1.1	
	Config 3	TDDConf.2.1	
CORESET Reference Channel	Config 1	CR.1.1 FDD	
	Config 2	CR.1.1 TDD	
	Config 3	CR.2.1 TDD	
SSB Configuration	Config 1	SSB.1 FR1	
	Config 2	SSB.1 FR1	
	Config 3	SSB.2 FR1	
SMTC Configuration	Config 1, 2	SMTC.1	

PDSCH/PDCCH subcarrier spacing	Config 3		SMTC.1	
	Config 1, 2		15 kHz	
	Config 3		30 kHz	
SSB index assigned as pathloss RS			0 in T1, 0 in T2, 1 in T3	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			1x2 Low	
DRX			OFF	
Gap pattern ID			gp0	
<i>phr-ProhibitTimer</i>		sub frame	0	
<i>phr-Tx-PowerFactorChange</i>		dB	5	
<i>phr-PeriodicTimer</i>		sub frame	infinity	
Filter coefficient			0	L3 filtering is not used
T1		s	[2]	
T2		s	[2]	
T3		s	0.2	

Table A.6.5.9.1.1-3: NR Cell specific test parameters for MAC-CE based pathloss reference signal switch in SA

Parameter			Unit	Test 1		
				T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS			dB	4		
EPRE ratio of PDCCH to PDCCH DMRS			dB	0		
EPRE ratio of PBCH DMRS to SSS			dB	0		
EPRE ratio of PBCH to PBCH DMRS			dB			
EPRE ratio of PSS to SSS			dB			
EPRE ratio of PDSCH DMRS to SSS			dB			
EPRE ratio of PDSCH to PDSCH DMRS			dB			
EPRE ratio of OCNG DMRS to SSS			dB			
EPRE ratio of OCNG to OCNG DMRS			dB			
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	[7]		
	N_{oc}	Config 1, 2, 3	dBm/15kHz	[-101]		
	$\hat{E}_s / N_{oc}$		dB	[7]		
	SS-RSRP Note 4	Config 1, 2	dBm/SCS	[-94]		
		Config 3		[-91]		
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	[-3]		
	N_{oc}	Config 1, 2, 3	dBm/15kHz	[-101]		
	$\hat{E}_s / N_{oc}$		dB	[-3]		
	SS-RSRP Note 4	Config 1, 2	dBm/SCS	[-104]		
		Config 3		[-101]		
I ₀ Note 5	Config 1, 2		dBm	-65.3/9.36MHz		
	Config 3			-59.2/38.16MHz		
Propagation condition				AWGN		

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4:	The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 5:	SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.

A.6.5.9.1.2 Test Requirements

During T3, the UE shall start to send the PHR for PCell no later than the slot $i + T_{HARQ} + \left\lceil \frac{3\text{ms} + 5 \cdot T_{target_PL-RS} + 2\text{ms}}{NR\ slot\ length} \right\rceil$.

During T3, the UE shall start to send the PHR for PCell no earlier than the slot $i + T_{HARQ} + 3N_{slot}^{subframe,\mu}$.

Where, T_{HARQ} is the timing between pathloss reference MAC-CE activation command and acknowledgement as specified in [7], T_{target_PL-RS} is the periodicity of the target pathloss reference signal which is SSB in this test.

During T3, UE shall send L1-RSRP report with measurement results for both SSB0 and SSB1.

All of the above test requirements shall be fulfilled in order for the observed pathloss RS switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

Note: The UE shall be given proper uplink transmission grant during T2 and T3.

A.6.6 Measurement procedure

A.6.6.1 Intra-frequency Measurements

A.6.6.1.1 SA event triggered reporting tests without gap under non-DRX

A.6.6.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2.5.1 and 9.2.5.2.

A.6.6.1.1.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table A.6.6.1.1.1-1 and A.6.6.1.1.1-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.6.6.1.1.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Note: The UE is only required to be tested in one of the supported test configurations.

Table A.6.6.1.1.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

Table A.6.6.1.1.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	

		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	--58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.6.1.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.1.2 SA event triggered reporting tests without gap under DRX

A.6.6.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2.5.1 and 9.2.5.2.

A.6.6.1.2.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.6.6.1.2.2-1, A.6.6.1.2.2-2 and A.6.6.1.2.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.1.2.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.1.2.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3	Cell 1		
Neighbour cell		1, 2, 3	Cell 2		Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2		
SSB configuration		1	SSB.1 FR1		
		2	SSB.1 FR1		
		3	SSB.2 FR1		
SMTC configuration		1	SMTC.2		
		2	SMTC.1		
		3	SMTC.1		
A3-Offset	dB	1, 2, 3	-4.5		
CP length		1, 2, 3	Normal		
Hysteresis	dB	1, 2, 3	0		
Time To Trigger	s	1, 2, 3	0		
Filter coefficient		1, 2, 3	0		L3 filtering is not used
DRX		1, 2, 3	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s		Synchronous cells
		3	3 μ s		Synchronous cells
T1	s	1, 2, 3	5		
T2	s	1, 2, 3	5	10	

Table A.6.6.1.2.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1	Cell 2
-----------	------	--------------------	--------	--------

			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	--58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.6.6.1.2.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.1.3 SA event triggered reporting tests with per-UE gaps under non-DRX

A.6.6.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.6.6.1.3.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.6.6.1.3.1-1 and A.6.6.1.3.1-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.6.6.1.3.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.1.3.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
Measurement gap type		1, 2, 3	Per-UE gaps	
Measurement gap repetition periodicity	ms	1, 2, 3	40	
Measurement gap length	ms	1, 2, 3	6	

Measurement gap offset	ms	1, 2, 3	39	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX	ms	1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

Table A.6.6.1.3.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.2		DLBWP.1.1	

Active UL BWP configuration		1, 2, 3	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3	CSI-RS		SSB	
N_{oc} ^{Note 2}	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP ^{Note 3}	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	--58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.6.6.1.3.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.1.4 SA event triggered reporting tests with per-UE gaps under DRX

A.6.6.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.6.6.1.4.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.6.6.1.4.2-1, A.6.6.1.4.2-2 and A.6.6.1.4.2-3 below. In the measurement control information, a measurement object is configured for the frequency

of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.1.4.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.1.4.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3	Cell 1		
Neighbour cell		1, 2, 3	Cell 2		Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2		
Measurement gap type		1, 2, 3	Per-UE gaps		
Measurement gap repetition periodicity	ms	1, 2, 3	40		
Measurement gap length	ms	1, 2, 3	6		
Measurement gap offset	ms	1, 2, 3	39		
SSB configuration		1	SSB.1 FR1		
		2	SSB.1 FR1		
		3	SSB.2 FR1		
SMTC configuration		1	SMTC.2		
		2	SMTC.1		
		3	SMTC.1		
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0		
		2	CSI-RS.1.2 TDD resource #0		
		3	CSI-RS.2.2 TDD resource #0		
A3-Offset	dB	1, 2, 3	-4.5		
CP length		1, 2, 3	Normal		
Hysteresis	dB	1, 2, 3	0		
Time To Trigger	s	1, 2, 3	0		
Filter coefficient		1, 2, 3	0		L3 filtering is not used
DRX		1, 2, 3	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s		Synchronous cells
		3	3 μ s		Synchronous cells

T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	10

Table A.6.6.1.4.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3	CSI-RS		SSB	
N_{oc} ^{Note 2}	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP ^{Note 3}	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	--58.50	-56.16

Propagation Condition		1, 2, 3	AWGN
Note 1:	Table A.6.6.1.4.2-1 The resources for uplink transmission are assigned to the UE prior to the start of time period T2.		
Note 2:	Table A.6.6.1.4.2-1 Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3:	Table A.6.6.1.4.2-1 SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		

Table A.6.6.1.4.2-4: Void**Table A.6.6.1.4.2-5: Void**

A.6.6.1.4.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.1.5 SA event triggered reporting tests without gap under non-DRX with SSB index reading

A.6.6.1.5.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.6.6.1.5.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for FDD PCell and neighbour cell are given in Table A.6.6.1.5.2-1 and A.6.6.1.5.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.6.6.1.5.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.6.6.1.5.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	
Neighbour cell		1	Cell 2	Cell to be identified.
RF Channel Number		1	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
SMTC configuration		1	SMTC.2	
A3-Offset	dB	1	-4.5	
CP length		1	Normal	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX	ms	1		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1	5	
T2	s	1	5	

Table A.6.6.1.5.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
OCNG Patterns		1	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
Initial BWP configuration		1	DLBWP.0,1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1	SSB		SSB	
N_{oc} ^{Note 2}	dBm/SCS	1	-98			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
SS-RSRP ^{Note 3}	dBm/SCS kHz	1	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
Propagation Condition		1	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.1.5.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.1.6 SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading

A.6.6.1.6.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.6.6.1.6.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for FDD PCell and neighbour cell are given in Table A.6.6.1.6.2-1 and A.6.6.1.6.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.6.6.1.6.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Table A.6.6.1.6.2-2: General test parameters for SA intra-frequency event triggered reporting with gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	
Neighbour cell		1	Cell 2	Cell to be identified.
RF Channel Number		1	1: Cell 1 and Cell 2	
Measurement gap type		1	Per-UE gaps	

Measurement gap repetition periodicity	ms	1	40	
Measurement gap length	ms	1	6	
Measurement gap offset	ms	1	39	
SSB configuration		1	SSB.1 FR1	
SMTC configuration		1	SMTC.2	
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0	
A3-Offset	dB	1	-4.5	
CP length		1	Normal	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX	ms	1		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1	5	
T2	s	1	5	

Table A.6.6.1.6.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD		N/A	
OCNG Patterns		1	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1	CSI-RS		SSB	
N_{oc} ^{Note 2}	dBm/SCS	1	-98			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
SS-RSRP ^{Note 3}	dBm/SCS kHz	1	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
Propagation Condition		1	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.1.6.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.1.7 SA event triggered reporting tests under DRX for UE configured with highSpeedMeasFlag-r16

A.6.6.1.7.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event for UE configured with highSpeedMeasFlag-r16. This test will partly verify the intra-frequency cell search requirements in clauses 9.2.5.1 and 9.2.5.2.

A.6.6.1.7.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.6.6.1.7.2-1, A.6.6.1.7.2-2 and A.6.6.1.7.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.1.7.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.1.7.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Test configuration	Value	Comment
<i>highSpeedMeasFlag-r16</i>		1,2,3	Present	To enable high speed measurement enhancements
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3	DRX.7	640ms DRX cycle
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	6	

Table A.6.6.1.7.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	

Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2	AWGN		AWGN 1944Hz ^{Note 4}	
		3	AWGN		AWGN 3334Hz ^{Note 5}	
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944Hz.					
Note 5:	The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334Hz.					

A.6.6.1.7.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 5120 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.1.8 SA event triggered reporting tests without gap under DRX for UE configured with highSpeedMeasCA-Scell-r17

A.6.6.1.8.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event for UE configured with highSpeedMeasCA-Scell-r17. This test will partly verify the intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.6.6.1.8.2 Test parameters

Three cells are deployed in the test, which are FR1 PCell (Cell 1), a FR1 deactivated SCell (Cell 2) and a FR1 neighbour cell (Cell 3) on the same frequency as the SCell (Cell 2). The test parameters for PCell are given in Table A.6.6.1.8.21, A.6.6.1.8.2-2 and A.6.6.1.8.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A6 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 3.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.1.8.2-1: Supported PCell test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations.
Note 2:	The UE is only required to be tested in one of the supported test configurations with the smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW _{channel}) defined in each test configuration.

Table 6.6.1.8.4.1-1A: Supported SCell test configurations

Configuration _{SCell}	Description
1A	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2A	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3A	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations.
Note 2:	The UE is only required to be tested in one of the supported test configurations with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW _{channel}) defined in each test configuration.
Note 3:	NR Cell 3 has the same SCS, BW and duplex mode as NR Cell 2.

Table A.6.6.1.8.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for deactivated SCell in FR1 with DRX highSpeedMeasCA-Scell-r17

Parameter	Unit	Test configuration	Value	Comment
highSpeedMeasCA-Scell-r17		1,2,3	Present	To enable high speed measurement enhancements
Active cell		1, 2, 3	Cell 1	

Deactivated SCell		1A, 2A, 3A	Cell 2	
Neighbour cell		1A, 2A, 3A	Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and 3	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A6-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3	DRX.6	
measCycleSCell		1, 2, 3	640ms	
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	10	

Table A.6.6.1.8.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for deactivated SCell in FR1 with DRX highSpeedMeasCA-Scell-r17

Parameter	Unit	Test configuration	Cell 1	Cell 2	Cell 3
TDD configuration		1,1A	N/A	N/A	N/A
		2,2A	TDDConf.1.1	TDDConf.1.1	TDDConf.1.1
		3,3A	TDDConf.2.1	TDDConf.2.1	TDDConf.2.1
PDSCH RMC configuration		1,1A	SR.1.1 FDD	N/A	N/A
		2,2A	SR.1.1 TDD		
		3,3A	SR.2.1 TDD		
RMSI CORESET RMC configuration		1,1A	CR.1.1 FDD	N/A	N/A
		2,2A	CR.1.1 TDD		
		3,3A	CR.2.1 TDD		
Dedicated CORESET RMC configuration		1,1A	CCR.1.1 FDD	N/A	N/A
		2,2A	CCR.1.1 TDD		
		3,3A	CCR.2.1 TDD		
OCNG Patterns		1, 2, 3,1A,2A,3A	OP.1	OP.1	OP.1
TRS configuration		1,1A	TRS.1.1 FDD	N/A	N/A
		2,2A	TRS.1.1 TDD	N/A	N/A
		3,3A	TRS.1.2 TDD	N/A	N/A
Initial BWP configuration		1, 2, 3,1A,2A,3A	DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Active DL BWP configuration		1, 2, 3,1A,2A,3A	DLBWP.1.1	DLBWP.1.1	DLBWP.1.1

Active UL BWP configuration		1, 2, 3,1A,2A,3A	ULBWP.1.1		ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3,1A,2A,3A	SSB		SSB		SSB	
N_{oc} ^{Note 2}	dBm/SCS	1,1A	-98					
		2,2A	-98					
		3,3A	-95					
N_{oc} ^{Note 2}	dBm/15 kHz	1,1A	-98					
		2,2A						
		3,3A						
$\hat{E}_s/I_{ot}$	dB	1,1A	4	4	4	-1.46	-Infinity	-1.46
		2,2A						
		3,3A						
$\hat{E}_s/N_{oc}$	dB	1,1A	4	4	4	4	-Infinity	4
		2,2A						
		3,3A						
SSB_RP ^{Note 3}	dBm/SCS kHz	1,1A	-94	-94	-94	-94	-Infinity	-94
		2,2A	-94	-94	-94	-94	-Infinity	-94
		3,3A	-91	-91	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1,1A	-64.60	-64.60	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2,2A	-64.60	-64.60	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3,3A	-58.50	-58.50	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1,2,1A,2A	AWGN				AWGN 1944Hz ^{Note 4}	
		3,3A	AWGN				AWGN 3334Hz ^{Note 5}	
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944Hz. Note 5: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334Hz.								

A.6.6.1.8.3 Test Requirements

The UE shall send one Event A6 triggered measurement report, with a measurement reporting delay less than 5760 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.2 Inter-frequency Measurements

A.6.6.2.1 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

A.6.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.2.1.1-1, A.6.6.2.1.1-2 and A.6.6.2.1.1-3.

Measurement gap pattern configuration is defined in Table A.6.6.2.1.1-2..

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.6.6.2.1.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.2.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	
SMTC-SSB parameters		Config 1	SSB.1 FR1	As specified in clause A.3.10.1
		Config 2	SSB.1 FR1	As specified in clause A.3.10.1
		Config 3	SSB.2 FR1	As specified in clause A.3.10.1
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used

DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3 μ s	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1	

Table A.6.6.2.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD			
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11			Config 1	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
			Config 3	30			

EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz		-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

A.6.6.2.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.2.2 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used

A.6.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.2.2.1-1, A.6.6.2.2.1-2 and A.6.6.2.2.1-3.

Measurement gap pattern configuration is defined in Table A.6.6.2.2.1-2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.2.2.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.2.2.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.1	DRX. 7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.

		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1.1	11	

Table A.6.6.2.2.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration n	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP configuration n	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3	ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD		NA	
			Config 3	SR2.1 TDD		NA	
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD		NA	
			Config 2	CR.1.1 TDD		NA	
			Config 3	CR.2.1 TDD		NA	
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD		NA	
			Config 2	CCR.1.1 TDD		NA	
			Config 3	CCR.2.1 TDD		NA	
SSB parameters			Config 1	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11			Config 1	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	

EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz	Config 1,2,3	-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

Table A.6.6.2.2.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.6.6.2.2.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.6.6.2.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2, UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.2.3 Void

A.6.6.2.4 Void

A.6.6.2.5 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

A.6.6.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.2.5.1-1, A.6.6.2.5.1-2 and A.6.6.2.5.1-3.

Measurement gap pattern configuration is defined in Table A.6.6.2.5.1-2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.6.6.2.5.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	target NR cell has the same SCS, BW and duplex mode as NR serving cell

Table A.6.6.2.5.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1.1	

Table A.6.6.2.5.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter		Unit	Test configuration n	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP configuration n	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	

OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1	SR.1.1 FDD			
		Config 2	SR.1.1 TDD			
		Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1	CR.1.1 FDD		-	
		Config 2	CR.1.1 TDD			
		Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel		Config 1	CCR.1.1 FDD		-	
		Config 2	CCR.1.1 TDD			
		Config 3	CCR.2.1 TDD			
SSB parameters		Config 1	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz		-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.4	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.6.6.2.5.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.2.6 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is used

A.6.6.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.2.6.1-1, A.6.6.2.6.1-2 and A.6.6.2.6.1-3.

Measurement gap pattern configuration is defined in Table A.6.6.2.6.1-2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.2.6.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	target NR cell has the same SCS, BW and duplex mode as NR serving cell

Table A.6.6.2.6.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
-----------	------	--------------------	-------	---------

			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.1	DRX. 7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3 μ s		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1.3	13.5	

Table A.6.6.2.6.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			

RMSI CORESET Reference Channel		Config 1	CR.1.1 FDD		-	
		Config 2	CR.1.1 TDD			
		Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel		Config 1	CCR.1.1 FDD		-	
		Config 2	CCR.1.1 TDD			
		Config 3	CCR.2.1 TDD			
SSB parameters		Config 1	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz		-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_\alpha$	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
I_0 ^{Note3}	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

A.6.6.2.6.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2, UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.2.7 Void

A.6.6.2.8 Void

A.6.6.2.9 SA event triggered reporting tests with additional mandatory gap pattern

A.6.6.2.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event when mandatory gap pattern with 3ms MGL is configured.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.2.9.1-1, A.6.6.2.9.1-2 and A.6.6.2.9.1-3.

Measurement gap pattern configuration defined in Table A.6.6.2.9.1-2 does not depend on per-FR gap capability of UE.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.6.6.2.9.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.2.9.1-2: General test parameters for SA inter-frequency event triggered reporting with additional mandatory gap pattern

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.

Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	3	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	12	
		Config 2,3	9	
SMTC-SSB parameters		Config 1	SSB.1 FR1	As specified in clause A.3.10.1
		Config 2	SSB.1 FR1	As specified in clause A.3.10.1
		Config 3	SSB.2 FR1	As specified in clause A.3.10.1
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1	

Table A.6.6.2.9.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting with additional mandatory gap pattern

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	

		Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1	SR.1.1 FDD			
		Config 2	SR.1.1 TDD			
		Config 3	SR2.1 TDD			
CORESET Reference Channel		Config 1	CR.1.1 FDD			
		Config 2	CR.1.1 TDD			
		Config 3	CR2.1 TDD			
SSB parameters		Config 1	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1	SMTC.1		SMTC.9	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0	0		
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz		-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

A.6.6.2.9.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.2.10 SA event triggered reporting tests for FR1 when DRX is used

A.6.6.2.10.1 Test Purpose and Environment

The purpose of this test is to verify that the UE which supports interFrequencyMeas-Nogap-r16 makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search without measurement gap requirements in clause 9.3.9.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on RF channel 2. The SSB of cell 2 is completely within UE's active BWP BW. The RBs containing SSB from cell 1 and cell 2 should be different in frequency location within the cell bandwidth. The test parameters are given in Tables A.6.6.2.10.1-1, A.6.6.2.10.1-2 and A.6.6.2.10.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.2.10.1-1: SA event triggered reporting tests when DRX is used for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.2.10.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 when DRX is used

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.

Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	DRX.1	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1	

Table A.6.6.2.10.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 when DRX is used

Parameter		Unit	Test configuration n	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP configuration n	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3	ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD		NA	
			Config 3	SR2.1 TDD		NA	
CORESET Reference Channel			Config 1	CR.1.1 FDD		NA	
			Config 2	CR.1.1 TDD		NA	
			Config 3	CR2.1 TDD		NA	

SSB parameters		Config 1	SSB.1 FR1		SSB.5 FR1	
		Config 2	SSB.1 FR1		SSB.5 FR1	
		Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11		Config 1	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0	0		
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15 kHz	Config 1,2,3	-98		-98	
N_{oc}^{Note2}	dBm/S CS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
I_o^{Note3}	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					

Table A.6.6.2.10.1-4: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting when DRX is used

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.6.6.2.10.2 Test Requirements

In test config 1, UE is required to report SSB time index. UE is not required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test config 2 and 3, UE is not required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 900 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.2.11 SA event triggered reporting tests for FR1 without gap when DRX is not used

A.6.6.2.11.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.9.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The SSB of Cell 2 is completely within UE's active BWP BW. The RBs containing SSB from cell 1 and cell 2 should be different in frequency location within the cell bandwidth. The test parameters are given in Tables A.6.6.2.11.1-1, A.6.6.2.11.1-2 and A.6.6.2.11.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.6.6.2.11.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.2.11.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without gap

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.

A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1	

Table A.6.6.2.11.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without gap

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
CORESET Reference Channel			Config 1	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
SSB parameters			Config 1	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11			Config 1	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	

PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0	0		
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz		-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					

A.6.6.2.11.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to read the neighbour cell SSB index in this test.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.2.12 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used for UE configured with *highSpeedMeasInterFreq-r17*

A.6.6.2.12.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event when UE is configured with *highSpeedMeasInterFreq-r17*. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.2.12.1-1, A.6.6.2.12.1-2 and A.6.6.2.12.1-3.

Measurement gap pattern configuration is defined in Table A.6.6.2.12.1-2. In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.6.6.2.12.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.2.12.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection for UE configured with *highSpeedMeasInterFreq-r17*

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0 4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used

DRX		Config 1,2,3	DRX.14	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	2.3	

Table A.6.6.2.12.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection for UE configured with *highSpeedMeasInterFreq-r17*

Parameter		Unit	Test configuration n	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP configuration n	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3	ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD		NA	
			Config 3	SR2.1 TDD		NA	
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD		NA	
			Config 2	CR.1.1 TDD		NA	
			Config 3	CR.2.1 TDD		NA	
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD		NA	
			Config 2	CCR.1.1 TDD		NA	
			Config 3	CCR.2.1 TDD		NA	
SSB parameters			Config 1	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.2 FR1		SSB.6 FR1	

SMTC configuration defined in A.3.11		Config 1	SMTC.2		SMTC.5	
		Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz	Config 1,2,3	-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2	-98		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2	AWGN		AWGN 1944Hz ^{Note 5}	
		Config 3	AWGN		AWGN 3334Hz ^{Note 6}	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944Hz.						
Note 6: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334Hz.						

A.6.6.2.12.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 2240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.3 Inter-RAT Measurements

A.6.6.3.1 SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1

A.6.6.3.1.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1. This test shall partly verify the cell search and measurement requirements in Clauses 9.4.2 and 9.4.3.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

Supported test configurations are shown in table A.6.6.3.1.1-1. General test parameters are provided in Table A.6.6.3.1.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.6.6.3.1.1-3 and A.6.6.3.1.1-4, respectively.

Table A.6.6.3.1.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.6.3.1.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.6.6.3.1.1-2 and A.6.6.3.1.1-3.	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 2

Gap Pattern Id		0	As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	5	
Note 1: Values are defined in Table A.6.6.3.1.1-3			

Table A.6.6.3.1.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in non-DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	1	
Duplex mode			1, 4	FDD	
			2, 3, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
BW _{channel}		MHz	1, 4	10: N _{RB,c} = 52 (FDD)	
			2, 5	10: N _{RB,c} = 52 (TDD)	
			3, 6	40: N _{RB,c} = 106 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
CSI-RS for tracking			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5	--96	
			3, 6	--93	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					

EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}^{Note2}	dBm/15 KHz	1, 2, 3, 4, 5, 6	-104	
N_{oc}^{Note2}	dBm/SCS	1, 2, 4, 5	-104	
		3, 6	-101	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	16	0
$\hat{E}_s/I_{ot}^{Note3}$	dB	1, 2, 3, 4, 5, 6	16	0
SS-RSRP ^{Note3}	dBm/SCS	1, 2, 4, 5	-88	-104
		3, 6	-85	-101
SSB_RP ^{Note3}	dBm/SCS	1, 2, 4, 5	-88	-104
		3, 6	-85	-101
I_o^{Note3}	dBm/9.36 MHz	1, 2, 4, 5	-59.94	-73.04
	dBm/38.16 MHz	3, 6	-53.84	-66.93
Propagation condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Table A.6.6.3.1.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	2	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	

		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
Ê _s /N _{oc}	dB	1, 2, 3, 4, 5, 6	-Infinity	17
Ê _s /I _{ot} ^{Note5}	dB	1, 2, 3, 4, 5, 6	-Infinity	17
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
I _o ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6	-73.21+10log (N _{RB,c} /50)	-56.12+10log (N _{RB,c} /50)
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5: Ê _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.6.3.1.2 Test Requirements

The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.3.2 SA NR - E-UTRAN event-triggered reporting in DRX in FR1

A.6.6.3.2.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1 when DRX is used. This test shall partly verify the cell search and measurement requirements in Clauses 9.4.2 and 9.4.3. There are two test

cases. In test 1 the UE shall be configured with DRX cycle of 40 ms. In test 2 the UE shall be configured with DRX cycle of 640 ms.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

In each test the UE shall be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore the UE shall be allocated with PUSCH resource at every DRX cycle.

Supported test configurations are shown in table A.6.6.3.2.1-1. General test parameters are provided in Table A.6.6.3.2.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.6.6.3.2.1-3 and A.6.6.3.2.1-4, respectively.

Table A.6.6.3.2.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.6.3.2.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Test 1	Test 2	Comment
		Value		
NR RF Channel Number		1		1 NR carrier frequency is used in the test
LTE RF Channel Number		2		1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.6.6.3.2.1-2 and A.6.6.3.2.1-3.		
Active cell		Cell 1		Cell 1 is on RF channel number 1
Neighbour cell		Cell 2		Cell 2 is on RF channel number 2
Gap Pattern Id		0		As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP		Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP		Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95		E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0		
TimeToTrigger	s	0		
Filter coefficient		0		L3 filtering is not used
DRX		DRX.1	DRX. 7	DRX cycle configurations DRX.1 and DRX. 7 are defined in Table A.3.3.1-1 and Table A.3.3. 7-1 respectively.
T1	s	5		
T2	s	5	15	

Note 1: Values are defined in Table A.6.6.3.2.1-3

Table A.6.6.3.2.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	1	
Duplex mode			1, 4	FDD	
			2, 3, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
BW _{channel}		MHz	1, 4	10: N _{RB,c} = 52 (FDD)	
			2, 5	10: N _{RB,c} = 52 (TDD)	
			3, 6	40: N _{RB,c} = 106 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
CSI-RS for tracking			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5	-96	
			3, 6	-93	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N _{oc} ^{Note2}		dBm/15 KHz	1, 2, 3, 4, 5, 6	-104	
N _{oc} ^{Note2}		dBm/SCS	1, 2, 4, 5	-104	
			3, 6	-101	
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	16	0
$\hat{E}_s/I_{ot}$ ^{Note3}		dB	1, 2, 3, 4, 5, 6	16	0
SS-RSRP ^{Note3}		dBm/SCS	1, 2, 4, 5	-88	-104

		3, 6	-85	-101
SSB_RP ^{Note3}	dBm/SCS	1, 2, 4, 5	-88	-104
		3, 6	-85	-101
I _o ^{Note3}	dBm/9.36 MHz	1, 2, 4, 5	-59.94	-73.04
	dBm/38.16 MHz	3, 6	-53.84	-66.93
Propagation condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	$\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.6.6.3.2.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	2	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				

PDCCH_RA			
PDCCH_RB			
PDSCH_RA			
PDSCH_RB			
OCNG_RA ^{Note3}			
OCNG_RB ^{Note3}			
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6	-104
Ê _s /N _{oc}	dB	1, 2, 3, 4, 5, 6	-Infinity
Ê _s /I _{ot} ^{Note5}	dB	1, 2, 3, 4, 5, 6	-Infinity
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity
I _o ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6	-73.21+10log (N _{RB,c} /50)
Propagation Condition ^{Note6}		1, 2, 3, 4, 5, 6	AWGN
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2, 3, 4, 5, 6	1x2
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].			
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.			
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 5: Ê _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].			

A.6.6.3.2.2 Test Requirements

In test 1, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

In test 2, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 12.8s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.3.3 SA NR - E-UTRAN event-triggered reporting in DRX in FR1 for UE configured with highSpeedMeasFlag-r16

A.6.6.3.3.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements for UE configured with highSpeedMeasFlag-r16 in standalone (SA) operation with PCell in FR1 when DRX is used. This test shall partly verify the cell search and measurement requirements in Clauses 9.4.2 and 9.4.3.

In the test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

The UE shall be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore the UE shall be allocated with PUSCH resource at every DRX cycle.

Supported test configurations are shown in table A.6.6.3.3.1-1. General test parameters are provided in Table A.6.6.3.3.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.6.6.3.3.1-3 and A.6.6.3.3.1-4, respectively.

Table A.6.6.3.3.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1 for UE configured with highSpeedMeasFlag-r16

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.6.3.3.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1 for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.6.6.3.3.1-2 and A.6.6.3.3.1-3.	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
Gap Pattern Id		0	As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-97	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		DRX.6	DRX cycle configurations DRX.6 is defined in Table A.3.3.1-6.
T1	s	5	
T2	s	5	
Note 1: Values are defined in Table A.6.6.3.3.1-3			

Table A.6.6.3.3.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in DRX with PCell in FR1 for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	

			2, 3, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
BW _{channel}		MHz	1, 4	10: N _{RB,c} = 52 (FDD)	
			2, 5	10: N _{RB,c} = 52 (TDD)	
			3, 6	40: N _{RB,c} = 106 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORESET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORESET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6	OP.1	
SMTc configuration			1, 2, 3, 4, 5, 6	SMTc.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
CSI-RS for tracking			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5	-98	
			3, 6	-95	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N _{oc} ^{Note2}		dBm/15 KHz	1, 2, 3, 4, 5, 6	-106	
N _{oc} ^{Note2}		dBm/SCS	1, 2, 4, 5	-106	
			3, 6	-103	
Ê _s /N _{oc}		dB	1, 2, 3, 4, 5, 6	18	-2
Ê _s /I _{ot} ^{Note3}		dB	1, 2, 3, 4, 5, 6	18	-2
SS-RSRP ^{Note3}		dBm/SCS	1, 2, 4, 5	-88	-108
			3, 6	-85	-105
SSB_RP ^{Note3}		dBm/SCS	1, 2, 4, 5	-88	-108

		3, 6	-85	-105
Io ^{Note3}	dBm/9.36 MHz	1, 2, 4, 5	-59.98	-75.92
	dBm/38.16 MHz	3, 6	-53.88	-69.82
Propagation condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Table A.6.6.3.3.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1 for UE configured with highSpeedMeasFlag-r16

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	2	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				

PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6	-106	
Ê _s /N _{oc}	dB	1, 2, 3, 4, 5, 6	-Infinity	19
Ê _s /I _{ot} ^{Note5}	dB	1, 2, 3, 4, 5, 6	-Infinity	19
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
I _o ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6	-78.22+10log (N _{RB,c} /50)	-59.16+10log (N _{RB,c} /50)
Propagation Condition ^{Note6}		1, 2, 3, 4, 5, 6	AWGN1944	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2, 3, 4, 5, 6	1x2 Low	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5: Ê _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

A.6.6.3.3.2 Test Requirements

In the test, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 4.8s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.4 L1-RSRP measurement for beam reporting

A.6.6.4.1 SSB based L1-RSRP measurement when DRX is not used

A.6.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.6.6.4.1.1-1.

Table A.6.6.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.4.1.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.4.1.2-1 and Table A.6.6.4.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.6.6.4.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
BW _{channel}	1	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~3		Off
reportConfigType	1~3		periodic
reportQuantity	1~3		ssb-Index-RSRP
Number of reported RS	1~3		2
L1-RSRP reporting period	1~3	slot	80
T1	1~3	s	5
T2	1~3	s	1
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			

EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.6.6.4.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} ^{Note2}	1~3	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1,2	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s/I_{ot}$	1~3	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1,2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1,2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s/N_{oc}$	1~3	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.6.4.1.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.4.2 SSB based L1-RSRP measurement when DRX is used

A.6.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.6.6.4.2.1-1.

Table A.6.6.4.2.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.4.2.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.4.2.2-1 and Table A.6.6.4.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.6.6.4.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
BW _{channel}	1	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~3		DRX.3

reportConfigType	1~3		periodic
reportQuantity	1~3		ssb-Index-RSRP
Number of reported RS	1~3		2
L1-RSRP reporting period	1~3	slot	80
T1	1~3	s	5
T2	1~3	s	1
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.6.6.4.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} ^{Note2}	1~3	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1,2	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s/I_{ot}$	1~3	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1,2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1,2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s/N_{oc}$	1~3	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.6.4.2.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.4.3 CSI-RS based L1-RSRP measurement when DRX is not used

A.6.6.4.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.6.6.4.3.1-1.

Table A.6.6.4.3.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.4.3.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.4.3.2-1 and Table A.6.6.4.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.6.6.4.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.6.6.4.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDConf.1.1
	3		TDConf.2.1
BW _{channel}	1	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD

SSB configuration	3		CCR.2.1 TDD
	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
CSI-RS configuration	1		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
OCNG Patterns	1~3		OP.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
DRX configuration	1~3		Off
reportConfigType	1~3		aperiodic
reportQuantity	1~3		cri-RSRP
Number of reported RS	1~3		2
qcl-Info	1~3		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~3	slots	8
T1	1~3	s	5
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.6.6.4.3.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} ^{Note1}	1~3	dBm/15kHz	-94.65	
N_{oc} ^{Note1}	1,2	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~3	dB	0	3
CSI-RS RSRP ^{Note2}	1,2	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
I_{O} ^{Note2}	1,2	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/38.16 MHz	-57.59	-55.84
$\hat{E}_s / N_{oc}$	1~3	dB	0	3

- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.6.6.4.3.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.20.1.1 and relative accuracy requirement in clause 10.1.20.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.4.4 CSI-RS based L1-RSRP measurement when DRX is used

A.6.6.4.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.6.6.4.4.1-1.

Table A.6.6.4.4.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.4.4.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.4.4.2-1 and Table A.6.6.4.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.6.6.4.4.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.6.6.4.4.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A

	2		TDDConf.1.1
	3		TDDConf.2.1
BW _{channel}	1	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
CSI-RS configuration	1		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
OCNG Patterns	1~3		OP.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
DRX configuration	1~3		DRX.3
reportConfigType	1~3		aperiodic
reportQuantity	1~3		cri-RSRP
Number of reported RS	1~3		2
qcl-Info	1~3		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~3	slots	8
T1	1~3	s	5
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.6.6.4.4.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
-----------	--------	------	----------	----------

N_{oc}^{Note1}	1~3	dBm/15kHz	-94.65	
N_{oc}^{Note1}	1,2	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~3	dB	0	3
CSI-RS RSRP Note2	1,2	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
I_o^{Note2}	1,2	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/38.16 MHz	-57.59	-55.84
$\hat{E}_s / N_{oc}$	1~3	dB	0	3
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.6.4.4.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.20.1.1 and relative accuracy requirement in clause 10.1.20.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.4.5 SSB based L1-RSRP measurement when DRX is used for UE configured with *highSpeedMeasFlag-r16*

A.6.6.4.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement when UE is configured with *highSpeedMeasFlag-r16*. This test will partly verify the L1-RSRP measurement requirements for UE configured with *highSpeedMeasFlag-r16* in clause 9.5.4.1, with the testing configurations for NR cells in Table A.6.6.4.5.1-1.

Table A.6.6.4.5.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.4.5.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.4.5.2-1 and Table A.6.6.4.5.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.6.6.4.5.2-1: General test parameters for UE configured with *highSpeedMeasFlag-r16*

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
BW _{channel}	1	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~3		DRX.3
reportConfigType	1~3		periodic
reportQuantity	1~3		ssb-Index-RSRP
Number of reported RS	1~3		2
L1-RSRP reporting period	1~3	slot	80
T1	1~3	s	5
T2	1~3	s	2
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			

EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.6.6.4.5.2-2: SSB specific test parameters for UE configured with *highSpeedMeasFlag-r16*

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} ^{Note2}	1~3	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1,2	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~3	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1,2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1,2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1~3	dB	0	0	-Infinity	3
Propagation conditions	1,2		AWGN		AWGN 1944 Hz	
	3		AWGN		AWGN 3334 Hz	
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.6.6.4.5.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.4.6 Inter-cell SSB based L1-RSRP measurements on FR1 PCell when DRX is used

A.6.6.4.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement for SSB of a cell with additional PCI. This test will partly verify the L1-RSRP measurement requirements in clause 9.13.4.1, with the testing configurations for NR serving cells in Table A.6.6.4.6.1-1.

Table A.6.6.4.6.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.4.6.2 Test parameters

There are two cells in the test, the FR1 PCell (Cell 1) and a cell with additional PCI (Cell 2). The test parameters for the Cell 1 are given in Table A.6.6.4.6.2-1. The test parameters for Cell 2 are given in Table A.6.6.4.6.2-2 below.

SSB#0 and SSB#1 are transmitted on Cell 1 and Cell 2. In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSB#0 and report measurement results periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. At the beginning of T2, SSB#1 starts transmission and the UE is configured for L1-RSRP measurement on SSB#1. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured in CSI-ReportConfig and *additionalPCIList* configured in CSI-SSB-ResourceSet.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the the SSB#0 for Cell 1.

Table A.6.6.4.6.2-1: General test parameters

Parameter	Config	Unit	Value
Active cell	1~3		Cell 1
A cell with additional PCI	1~3		Cell 2
RF Channel Number	1~3		1: Cell 1 and Cell 2
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
BW _{channel}	1	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD

	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1 for Cell1 and Cell2
	2		SSB.3 FR1 for Cell1 and Cell2
	3		SSB.4 FR1 for Cell1 and Cell2
OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~3		DRX.3
reportConfigType	1~3		periodic
reportQuantity	1~3		ssb-Index-RSRP
Number of reported RS	1~3		2
L1-RSRP reporting period	1~3	slot	80
T1	1~3	s	5
T2	1~3	s	1
CP length	1~3		Normal
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~3		AWGN
Time offset between serving and a cell with additional PCI	1		< CP
	2		< CP
	3		< CP
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.6.6.4.6.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0 of Cell 1		SSB#1 of Cell 2	
			T1	T2	T1	T2
N_{oc} ^{Note2}	1~3	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1,2	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s/I_{ot}$	1~3	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1,2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65

I_o ^{Note3}	3		-91.65	-91.65	-Infinity	-88.65
	1,2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
$\hat{E}_s / N_{oc}$	3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
	1~3	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.6.4.6.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than X ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of SSB#1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2, where X is

- 680 for Config 1&2
- 660 for Config 3

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.5 Inter-RAT UTRAN FDD measurements

A.6.6.5.1 SA NR - UTRAN FDD event-triggered reporting in non-DRX in FR1

A.6.6.5.1.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE makes correct event-triggered reporting of inter-RAT UTRAN FDD measurements when operating in standalone (SA) operation with PCell in FR1. This test shall partly verify the cell search and measurement requirements in Clause 9.4.6.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT UTRAN FDD neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

Supported test configurations are shown in table A.6.6.5.1.1-1. General test parameters are provided in Table A.6.6.5.1.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.6.6.5.1.1-3 and A.6.6.5.1.1-4, respectively.

Table A.6.6.5.1.1-1: Supported test configurations in SA inter-RAT UTRAN FDD event triggered reporting in non-DRX with PCell in FR1

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, UTRA FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, UTRA FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, UTRA FDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.6.5.1.1-2: General test parameters for SA inter-RAT UTRAN FDD event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
UTRA RF Channel Number		2	1 UTRA carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.6.6.5.1.1-3 and A.6.6.5.1.1-4.	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
Gap Pattern Id		0	As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
Inter-RAT UTRA measurement quantity		CPICH Ec/Io	Measurement quantity for Cell 2
b1-ThresholdUTRA-FDD	dB	-16.5	CPICH Ec/Io threshold for SS-RSRP measurement on cell1 for event B1
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	5	
Note 1: Values are defined in Table A.6.6.5.1.1-3			

Table A.6.6.5.1.1-3: PCell specific test parameters for SA inter-RAT UTRAN FDD event triggered reporting in non-DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3	1	
Duplex mode			1, 2, 3	FDD	
TDD Configuration	SCS=15 KHz		2	TDDConf.1.1	
	SCS=30 KHz		3	TDDConf.2.1	
BW _{channel}		MHz	1	10: N _{RB,c} = 52 (FDD)	
			2	10: N _{RB,c} = 52 (TDD)	
			3	40: N _{RB,c} = 106 (TDD)	
PDSCH reference measurement channel			1	SR.1.1 FDD	
			2	SR.1.1 TDD	
			3	SR.2.1 TDD	
CORESET reference channel			1	CR.1.1 FDD	
			2	CR.1.1 TDD	
			3	CR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3	DLBWP.1.1	
	Initial UL BWP		1, 2, 3	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3	ULBWP.1.1	
OCNG pattern ^{Note1}			1, 2, 3	OP.1	
SMTC configuration			1, 2, 3	SMTC.1	
SSB configuration			1, 2	SSB.1 FR1	
			3	SSB.2 FR1	

CSI-RS for tracking		1	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
EPRE ratio of PSS to SSS	dB	1, 2, 3	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}^{Note2}	dBm/15 KHz	1, 2, 3	-106	
N_{oc}^{Note2}	dBm/SCS	1, 2	-106	
		3	-103	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3	18	-2
$\hat{E}_s/I_{ot}^{Note3}$	dB	1, 2, 3	18	-2
SS-RSRP ^{Note3}	dBm/SCS	1, 2	-88	-108
		3	-85	-105
SSB_RP ^{Note3}		dBm/SCS	1, 2	-88
	3		-85	-105
I_o^{Note3}	dBm/9.36 MHz	1, 2	-59.98	-75.92
	dBm/38.16 MHz	3	-53.88	-69.82
Propagation condition		1, 2, 3	ETDLA30	
Antenna Configuration and Correlation Matrix		1, 2, 3	1x2 Low	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Table A.6.6.5.1.1-4: UTRAN neighbour cell specific test parameters for SA inter-RAT UTRAN FDD event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Cell 2	
		T1	T2
UTRA RF Channel Number		2	
CPICH_Ec/Ior	dB	-10	
PCCPCH_Ec/Ior	dB	-12	
SCH_Ec/Ior	dB	-12	
PICH_Ec/Ior	dB	-15	
DPCH_Ec/Ior	dB	N/A	
OCNS		-0.941	
$\hat{I}_{or}/I_{oc}$	dB	-Infinity	-1.8
I_{oc}	dBm/3.84 MHz	-70	
CPICH_Ec/Io	dB	-Infinity	-14
Propagation Condition		AWGN	

Note 1: The DPCH level is controlled by the power control loop.

Note 2: The power of the OCNS channel that is added shall make the total power from the cell to be equal to I_{or} .

A.6.6.5.1.2 Test Requirements

The UE shall send one Event B1 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 2.4s from the start of period T2, i.e. when Cell 2 becomes detectable. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.6 CLI measurements

A.6.6.6.1 SRS-RSRP measurement with DRX

A.6.6.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of SRS-RSRP measurement. This test will verify the SRS-RSRP measurement requirements in clause 9.7.2.5 with the testing configurations for NR cells in Table A.6.6.6.1.1-1.

Table A.6.6.6.1.1-1: Applicable NR configurations for FR1 SRS-RSRP test

Configuration	Description
1	NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
2	NR 30 kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.6.1.2 Test Parameters

One cell is deployed in the test, which is FR1 PCell (Cell 1). The test parameters for PCell is given in Table A.6.6.6.1.2-1 and A.6.6.6.1.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system transmits SRS resource for measurement in the DL slot according to the SRS configuration in Table A.6.6.6.1.2-4 and the test parameters for the (virtual) neighbour cell UE in Table A. 6.6.6.1.2-3. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 1 data symbol before SRS to be transmitted.

Table A.6.6.6.1.2-1: General test parameters for SRS-RSRP event triggered reporting for PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
RF Channel Number		1, 2	1: Cell 1	
SSB configuration		1	SSB.1 FR1	
		2	SSB.2 FR1	
SMTC configuration		1	SMTC.1	
		2	SMTC.1	
SRS configuration		1	SRSCnf.1	Table A.6.6.6.1.2-3
		2	SRSCnf.2	
CP length		1, 2	Normal	

i1-Threshold	dBm	1	-97	
		2	-95	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	DRX.7	
Time offset between DL from serving cell and SRS from test system	μ s	1, 2	17.67	
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.6.6.6.1.2-2: NR Cell specific test parameters for SRS-RSRP event triggered reporting for PCell in FR1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1	TDDConf.1.1	
		2	TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 TDD	
		2	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 TDD	
		2	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 TDD	
		2	CCR.2.1 TDD	
OCNG Patterns		1, 2	OP.1	
TRS Configuration		1	TRS.1.1 TDD	
		2	TRS.1.2 TDD	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1	
N_{oc} Note 2	dBm/15 kHz	1	-98	
		2		
N_{oc} Note 2	dBm/SCS	1	-98	
		2	-95	
Propagation Condition		1, 2	AWGN	
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Table A.6.6.6.1.2-3: NR Cell specific test parameters for SRS-RSRP event triggered reporting for neighbour cell UE

Parameter	Unit	Test configuration	Neighbour cell UE	
			T1	T2
N_{oc} Note 2	dBm/15 kHz	1	-98	

N_{oc} Note 2	dBm/SCS	2		
		1	-98	
$\hat{E}_s/I_{ot}$	dB	2	-95	
		1	-infinity	4
$\hat{E}_s/N_{oc}$	dB	2		
		1	-infinity	4
SRS-RSRP Note 3	dBm/SCS kHz	2		
		1	-infinity	-94
Io	dBm/9.36 MHz	2	-infinity	-91
	dBm/38.16 MHz	1	-70.05	-64.59
		2	-63.96	-58.50
Propagation Condition		1, 2	AWGN	
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Table A.6.6.1.2-4: SRS configuration for measurement reporting

	Field	SRSCnf.1	SRSCnf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	12	12	
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset	sl640, 4	sl640, 9	
	sequenceId	0	0	Any 10 bit number

A.6.6.6.1.3 Test Requirements

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 1920 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.6.2 CLI-RSSI measurement with DRX

A.6.6.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of CLI-RSSI measurement. This test will verify the CLI-RSSI measurement requirements in clause 9.7.3.5 with the testing configurations for NR cells in Table A.6.6.6.2.1-1.

Table A.6.6.6.2.1-1: Applicable NR configurations for FR1 CLI-RSSI test

Configuration	Description
1	NR 15 kHz SCS, 10 MHz bandwidth, TDD duplex mode
2	NR 30 kHz SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.6.2.2 Test Parameters

One cell is deployed in the test, which are FR1 PCell (Cell 1). The test parameters for PCell is given in Table A.6.6.6.2.2-1 and A.6.6.6.2.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI measurement resource and on 1 data symbol before. The CLI-RSSI measurement resource configuration is in Table A.6.6.6.2.2-3.

Table A.6.6.6.2.2-1: General test parameters for CLI-RSSI event triggered reporting for PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	NR Cell 1	
RF Channel Number		1, 2	1: Cell 1	
SSB configuration		1	SSB.1 FR1	
		2	SSB.2 FR1	
SMTC configuration		1	SMTC.1	
		2	SMTC.1	
CLI-RSSI configuration		1	CLI-RSSICnf.1	Table A.6.6.6.2.2-3
		2	CLI-RSSICnf.2	
CP length		1, 2	Normal	
i1-Threshold	dBm	1	-93	
		2	-93	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	DRX.7	

Time offset between DL from serving cell and OCNG from test system	μs	1, 2	17.67	
T1	s	1, 2	5	
T2	s	1, 2	2	

Table A.6.6.2.2-2: NR Cell specific test parameters for CLI-RSSI event triggered reporting for PCell in FR1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1	TDDConf.1.1	
		2	TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 TDD	
		2	SR.2.1 TDD	
PUSCH parameters		1	N/A	
		2		
RMSI CORESET RMC configuration		1	CR.1.1 TDD	
		2	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 TDD	
		2	CCR.2.1 TDD	
OCNG Patterns ^{Note 3}		1, 2	OP.1	
TRS Configuration		1	TRS.1.1 TDD	
		2	TRS.1.2 TDD	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1	
N_{oc} on CLI-RSSI measurement resource ^{Note 2}	dBm/15 kHz	1	-116	-108
		2		
N_{oc} on CLI-RSSI measurement resource ^{Note 2}	dBm/SCS	1	-116	-108
		2	-113	-105
I_o on CLI-RSSI measurement resource	dBm/9.36 MHz	1	-88.05	-80.05
	dBm/38.16 MHz	2	-81.96	-74.00
I_o on CLI-RSSI measurement resource	dBm/1.08 MHz	1	-97.43	-89.43
	dBm/1.08 MHz	2	-97.44	-89.44
Propagation Condition		1, 2	AWGN	
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	OCNG is not transmitted in the CLI-RSSI measurement resources.			

Table A.6.6.2.2-3: CLI-RSSI measurement resource configuration for measurement reporting

	Field	CLI-RSSIConf.1	CLI-RSSIConf.2
RSSI-Resource	rssi-ResourceId	0	0
	rssi-SCS	15	30

startPRB	0	0
nrofPRBs	52	106
startPosition	3	3
nrofSymbols	11	11
rsi-PeriodicityAndOffset	sl640, 4	sl640, 9

A.6.6.2.3 Test Requirements

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 640 ms from the beginning of time period T2. The nominal RSSI used to evaluate the requirement shall be based on I_o .

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.7 NR measurements with autonomous gaps

A.6.6.7.1 SA intra-frequency CGI identification of NR neighbor cell in FR1

A.6.6.7.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of intra-frequency CGI identification of an NR neighbour cell in FR1 with autonomous gaps. This test shall partly verify the measurement requirements in Clause 9.11.

A.6.6.7.1.2 Test Parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the FR1 PCell and Cell 2 is an FR1 neighbour cell on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table A.6.6.7.1.1-2 and A.6.6.7.1.3-2 below. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable. A measurement object is configured for the frequency of the PCell and it is indicated to the UE that event-triggered reporting with Event A3 is used. The UE is expected to detect and send a measurement report with Event A3.

A new RRC message triggering CGI identification shall be sent to the UE during period T2, after the UE has reported Event A3. The RRC message shall create a measurement report configuration with purpose *reportCGI* and *useAutonomousGaps* set to setup. The start of T3 is the instant when the last TTI containing the RRC message implying CGI identification is sent to the UE.

The test equipment verifies that potential interruption is carried out correctly by monitoring ACK/NACK sent in PCell during T3 until a measurement report with CGI is sent.

Table A.6.6.71.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.7.1.2-2: General test parameters for SA intra-frequency CGI identification of NR neighbor cell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

Table A.6.6.7.1.2-3: NR Cell specific test parameters for SA intra-frequency CGI identification of NR neighbor cell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	

RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	--58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.6.7.1.3 Test Requirements

The UE shall send a measurement report containing the CGI of cell 2 within 255 ms from the start of time period T3.

Test requirement = RRC Procedure delay + $T_{\text{identify_CGI}}$ + TTI insertion uncertainty

= 10 + 240 + 2ms from the start of T3

= 252 ms, allow 255 ms

The UE shall be scheduled continuously throughout the test. From the start of T3 until 255 ms, the interruption on PCell shall not be more than the values specified for SA in clause 8.2.2.2.14.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.7.2 Identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA

A.6.6.7.2.1 Test Purpose and Environment

This test is to verify the requirement for identification of a new CGI of E-UTRA cell with autonomous gaps in NR SA in clause 9.4.7.

The test scenario comprises of one NR carrier and an E-UTRA carrier and two cells as given in tables A.6.6.7.2.1-1, A.6.6.7.2.1-2, A.6.6.7.2.1-3 and A.6.6.7.2.1-4. PDCCHs indicating new transmissions shall be sent continuously to ensure that the UE would have ACK/NACK sending during identifying a new CGI of E-UTRAN cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time

duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE is expected to detect and send a measurement report.

A RRC message implying SI reading shall be sent to the UE during period T2, after the UE has reported Event B2. The RRC message shall create a measurement report configuration with purpose *reportCGI* and *useAutonomousGaps* set to setup. The start of T3 is the instant when the last TTI containing the RRC message implying SI reading is sent to the UE.

Table A.6.6.7.2.1-1: Supported test configurations of inter-RAT E-UTRAN cell using autonomous gap in SA

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.6.7.2.1-2: General test parameters for identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 LTE carrier frequency is used in the test
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
LTE Channel Bandwidth	MHz	10	
LTE PDSCH/PCFICH/PDCCH/PHICH parameters			As specified in clause A.3.7.2.1
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
<i>useAutonomousGaps</i>		setup	As specified in clause 5.5.3.1 in TS 38.331.
Time offset between cells	ms	3	Asynchronous cells
T1	s	5	
T2	s	≤10	
T3	s	5	

Table A.6.6.7.2.1-3: PCell specific test parameters for identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6	1		
Duplex mode			1, 2, 3	FDD		
			4, 5, 6	TDD		
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1		
	SCS=30 KHz		3, 6	TDDConf.2.1		
BW _{channel}		MHz	1, 4	10: N _{RB,C} = 52 (FDD)		

			2, 5	10: $N_{RB,c} = 52$ (TDD)	
			3, 6	40: $N_{RB,c} = 106$ (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
CORSET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
b2-Threshold1		dBm/SCS	1, 2, 4, 5	-98	
			3, 6	-95	
b2-Threshold2EUTRA		dBm/15kHz	1, 2, 3, 4, 5, 6	-109	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} ^{Note2}		dBm/15 KHz	1, 2, 3, 4, 5, 6	-106	
N_{oc} ^{Note2}		dBm/SCS	1, 2, 4, 5	-106	
			3, 6	-103	
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	18	-2
$\hat{E}_s/I_{ot}$ ^{Note3}		dB	1, 2, 3, 4, 5, 6	18	-2
SS-RSRP ^{Note3}		dBm/SCS	1, 2, 4, 5	-88	-108
			3, 6	-85	-105
SSB_RP ^{Note3}		dBm/SCS	1, 2, 4, 5	-88	-108
			3, 6	-85	-105
I_o ^{Note3}		dBm/9.36 MHz	1, 2, 4, 5	-59.98	-75.92
		dBm/38.16 MHz	3, 6	-53.88	-69.82
Propagation condition			1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6	1x2 Low	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Table A.6.6.7.2.1-4: Cell specific test parameters for inter-RAT E-UTRAN cell for identification of a new CGI of E-UTRA cell using autonomous gaps

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	2		
Duplex mode		1, 2, 3	FDD		
		4, 5, 6	TDD		
TDD special subframe configuration ^{Note1}		4, 5, 6	6		
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1		
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	10 MHz: N _{RB,c} = 50		
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	10 MHz: R.3 FDD		
		4, 5, 6	10 MHz: R.0 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	10 MHz: R.6 FDD		
		4, 5, 6	10 MHz: R.6 TDD		
OCNG Patterns ^{Note2}		1, 2, 3	10 MHz: OP.10 FDD		
		4, 5, 6	10 MHz: OP.1 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note3}					
OCNG_RB ^{Note3}					
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6	-106		
Ê _s /N _{oc}	dB	1, 2, 3, 4, 5, 6	-Infinity	7	7
Ê _s /I _{ot} ^{Note5}	dB	1, 2, 3, 4, 5, 6	-Infinity	7	7
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-99	-99
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-99	-99
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low		
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].					
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.					
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.					
Note 5: Ê _s /I _{ot} , RSRP, and SCH_RP levels have been derived from other parameters for information purposes. They are not setttable parameters themselves.					

A.6.6.7.2.2 Test Requirements

The UE shall transmit a measurement report containing the cell global identifier of cell 2 within 200 milliseconds from the start of T3.

Test requirement = RRC Procedure delay with additional margin + $T_{\text{identify_CGI,E-UTRAN}}$ + TTI insertion uncertainty
 = 15 + 30 + 150 + 2ms from the start of T3
 = 197 ms, allow 200 ms.

- The UE shall be scheduled continuously throughout the test, and from the start of T3 until 200 ms at least the number of ACK/NACK specified in NOTE 2 shall be detected as being transmitted by the UE.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE 1: The actual overall delays measured in the test may be up to $2 \times TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 2: The overall ACK/NACK number is caused by two parts. Firstly, at least X ACK/NACK shall be sent during identifying the cell global identifier of cell 2, where X is defined in Table 8.2.2.2.15-1. Secondly, given that continuous DL data allocation, additional 43, 14 and 34 ACK/NACK shall be sent for FDD 15 kHz, TDD 15 kHz and TDD 30 kHz, respectively, from the start of T3 until 200 ms excludes 150 ms for identifying the cell global identifier of cell 2.

A.6.6.8 L1-SINR measurement for beam reporting

A.6.6.8.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR configured when DRX is used

A.6.6.8.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements in clause 9.8.4.1, with the testing configurations for NR cells in Table A.6.6.8.1.1-1.

Table A.6.6.8.1.1-1: Applicable NR configurations for FR1 CSI-RS based L1-SINR test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.8.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.8.2-1 and Table A.6.6.8.2-2 below.

In the CSI-RS measurement configuration, UE is indicated to perform L1-SINR measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. After 80ms from the beginning of the test, the DCI trigger comes in slot n (1 Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.6.6.8.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.6.6.8.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD

	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
BW _{channel}	1	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
CSI-RS configuration	1		CSI-RS.1.3 FDD
	2		CSI-RS.1.3TDD
	3		CSI-RS.2.3TDD
OCNG Patterns	1~3		OP.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTc configuration	1~3		SMTc.1
DRX configuration	1~3		DRX.3
reportConfigType	1~3		aperiodic
reportQuantity-r16	1~3		cri-SINR-r16
Number of reported RS	1~3		2
qcl-Info	1~3		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~3	slots	26
T1	1~3	s	5
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			

Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.6.6.8.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} ^{Note1}	1~3	dBm/15kHz	-94.65	
N_{oc} ^{Note1}	1,2	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s/I_{ot}$	1~3	dB	0	3
CSI-RS RSRP ^{Note3}	1,2	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
I_o ^{Note2}	1,2	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/38.16 MHz	-57.59	-55.84
$\hat{E}_s/N_{oc}$	1~3	dB	0	3
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.6.8.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.27.1.1 and relative accuracy requirement in clause 10.1.27.1.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.8.2 L1-SINR measurement with SSB based CMR and dedicated IMR when DRX is not used

A.6.6.8.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements in clause 9.8.4.2, with the testing configurations for NR cells in Table A.6.6.8.2.1-1.

Table A.6.6.8.2.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with SSB based CMR and CSI-RS based IMR

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.6.6.8.2.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.8.2.2-1 and Table A.6.6.8.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the SSBs and the associated CSI-RS resources, and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD measurements based on the SSBs, and UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-RS resources as IMR.

Table A.6.6.8.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
BW _{channel}	1	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	c		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
CSI-RS configuration	1		CSI-RS 1.1A FDD
	2		CSI-RS 1.1A TDD
	3		CSI-RS 2.1A TDD
OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1

SMTC configuration	1~3		SMTC.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~3		off
reportConfigType	1~3		periodic
reportQuantity-r16	1~3		ssb-Index-SINR-r16
Number of reported RS	1~3		2
L1-SINR reporting period	1~3	slot	80
T1	1~3	s	5
T2	1~3	s	1
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.6.6.8.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} ^{Note2}	1~3	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1,2	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s/I_{ot}$	1~3	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1,2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1,2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s/N_{oc}$	1~3	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

Table A.6.6.8.2.2-3: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0		CSI-RS#1	
			T1	T2	T1	T2
N_{oc} ^{Note2}	1~3	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1,2	dBm/CSI-RS SCS	-94.65			
	3		-91.65			
$\hat{E}_s/I_{ot}$	1~3	dB	0	0	-Infinity	3
CSI-RS RSRP ^{Note3}	1,2	dBm/CSI-RS SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1,2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s/N_{oc}$	1~3	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.6.8.2.3 Test Requirements

The UE shall send L1-SINR report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-SINR report including results of both SSB#0+CSI-RS#0 and SSB#1+CSI-RS#1 while meeting the accuracy requirement in clause 10.1.27.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCH.

A.6.6.8.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR configured when DRX is not used

A.6.6.8.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements with CSI-RS based CMR and dedicated IMR configured in clause 9.8.4.3, with the testing configurations for NR cells in Table A.6.6.8.3.1-1.

Table A.6.6.8.3.1-1: Applicable NR configurations for FR1 L1-SINR test with CMR and dedicated IMR

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Note:	The UE is only required to be tested in one of the supported test configurations
-------	--

A.6.6.8.3.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.6.8.3.2-1 and Table A.6.6.8.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the configured CSI-RS as CMR and an associated CSI-IM as IMR, and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. UE is also configured to measure L1-SINR based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (1 Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.6.6.8.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs, and UE is configured to perform L1-SINR measurement based on the CSI-RS as CMR and the CSI-IM as IMR.

Table A.6.6.8.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~3		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
BW _{channel}	1	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.4 FR1
CSI-RS configuration	1		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
CSI-IM configuration	1		CSI-IM.1.2 FDD
	2		CSI-IM.1.2 TDD
	3		CSI-IM.2.2 TDD
OCNG Patterns	1~3		OP.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD

Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1
DRX configuration	1~3		Off
reportConfigType	1~3		aperiodic
reportQuantity-r16	1~3		cri-SINR-r16
Number of reported RS	1~3		2
qcl-Info	1~3		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~3	slots	26
T1	1~3	s	5
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

A.6.6.8.3.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} ^{Note1}	1~3	dBm/15kHz	-94.65	
N_{oc} ^{Note1}	1,2	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~3	dB	0	3
CSI-RS RSRP ^{Note2}	1,2	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
I_o ^{Note2}	1,2	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/38.16 MHz	-57.59	-55.84
$\hat{E}_s / N_{oc}$	1~3	dB	0	3
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.6.8.3.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 as CMR + CSI-IM#0 as IMR and CSI-RS#1 as CMR + CSI-IM#1 as IMR while meeting the accuracy requirement in clause 10.1.27.3.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.9 Idle Mode CA/DC Measurements

A.6.6.9.1 SA Idle mode CA/DC measurement for FR1

A.6.6.9.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE performs the required measurements on the serving cell and the configured inter-frequency carrier for idle mode measurement reporting after the UE has entered Idle mode. This test will partly verify the Idle mode CA/DC measurements requirements in clause 4.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.9.1.1-1, A.6.6.9.1.1-2, A.6.6.9.1.1-3 and A.6.6.9.1.1-4.

The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. During T1, the UE is connected to cell 1 only and shall not have any timing information of cell 2. UE is configured with early measurement reporting with channel 2. Beam level reporting for early measurements is not configured. The connection is released at the end of T1. T2 starts when the connection is released. During the time periods T2 UE is in Idle mode. At T3 the UE is paged for connection setup and requested by the network to send idle mode measurements.

Table A.6.6.9.1.1-1: supported test configuration

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.9.1.1-2: General test parameters for SA Idle mode CA/DC measurement for FR1

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.
SMTC-SSB parameters		Config 1	SSB.1 FR1	As specified in clause A.3.10.1

		Config 2	SSB.1 FR1	As specified in clause A.3.10.1
		Config 3	SSB.2 FR1	As specified in clause A.3.10.1
Hysteresis	dB	Config 1,2,3	0	
PRACH configuration index		Config 1,2,3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX in connected mode		Config 1,2,3	OFF	DRX is not used
DRX in idle mode	s	Config 1,2,3	0.32	The value shall be used for all cells in the test.
T331	s		300	
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	10	
T2	s	Config 1,2,3	11.52	
T3	s	Config 1,2,3	10	

Table A.6.6.9.1.1-3: Cell specific test parameters for connected mode for SA Idle mode CA/DC measurement for FR1

Parameter		Unit	Test configuration	Cell 1			Cell 2		
				T1	T2	T3	T1	T2	T3
NR RF Channel Number			Config 1,2,3	1			2		
Duplex mode			Config 1	FDD					
			Config 2,3	TDD					
TDD configuration			Config 1	Not Applicable					
			Config 2	TDDConf.1.1					
			Config 3	TDDConf.2.1					
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52					
			Config 3	40: N _{RB,c} = 106					
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52					
			Config 3	40: N _{RB,c} = 106					
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1			NA		
	Initial UL BWP			ULBWP.0.1			NA		
	Dedicated DL BWP			DLBWP.1.1			NA		
	Dedicated UL BWP			ULBWP.1.1			NA		
TRS configuration			Config 1	TRS.1.1 FDD			NA		
			Config 2	TRS.1.1 TDD			NA		
			Config 3	TRS.1.2 TDD			NA		
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1			OP.1		
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD			SR.1.1 FDD		
			Config 2	SR.1.1 TDD			SR.1.1 TDD		
			Config 3	SR2.1 TDD			SR2.1 TDD		

CORESET Reference Channel		Config 1	CR.1.1 FDD			CR.1.1 FDD		
		Config 2	CR.1.1 TDD			CR.1.1 TDD		
		Config 3	CR2.1 TDD			CR2.1 TDD		
SSB parameters		Config 1	SSB.1 FR1			SSB.5 FR1		
		Config 2	SSB.1 FR1			SSB.5 FR1		
		Config 3	SSB.2 FR1			SSB.6 FR1		
SMTC configuration defined in A.3.11		Config 1	SMTC.2			SMTC.5		
		Config 2, 3	SMTC.1			SMTC.4		
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15					
		Config 3	30					
EPRE ratio of PSS to SSS		Config 1,2,3	0			0		
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} ^{Note2}	dBm/15 kHz		-98			-98		
N_{oc} ^{Note2}	dBm/S CS	Config 1,2	-98			-98		
		Config 3	-95			-95		
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-91	-91	-91	- infinity	-98	-98
		Config 3	-88	-88	-88	- infinity	-95	-95
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	7	7	7	- infinity	0	0
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	7	7	7	infinity	0	0
I_o ^{Note3}	dBm/9.36MHz	Config 1,2	-62.26	-62.26	-62.26	-70.5	-67.04	-67.04
	dBm/38.16MHz	Config 3	-56.15	-56.15	-56.15	-63.94	-60.93	-60.93
Propagation Condition		Config 1,2,3	AWGN			AWGN		

- Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
- Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

Table A.6.6.9.1.1-4: Cell specific test parameters for idle mode for SA Idle mode CA/DC measurement for FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number		1,2,3	1			2		
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	14	14	14	-infinity	12	12
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	7	7	7	-infinity	0	0
		2						
		3						
$\hat{E}_s / I_{ot}$	dB	1, 2, 3	7	7	7	-infinity	0	0
SS-RSRP Note3	dBm/SCS	1	-91	-91	-91	-infinity	-98	-98

		2	-91	-91	-91	-infinity	-98	-98
		3	-88	-88	-88	-infinity	-95	-95
Io	dBm/9.36 MHz	1	-62.26	-62.26	-62.26	-70.5	-67.04	-67.04
	dBm/9.36 MHz	2	-62.26	-62.26	-62.26	-70.5	-67.04	-67.04
	dBm/38.16 MHz	3	-56.15	-56.15	-56.15	-63.94	-60.93	-60.93
Treselection	s	1, 2, 3	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	Not sent			Not sent		
Propagation Condition		1, 2, 3	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers							
Note 3:	and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.6.6.9.1.2 Test Requirements

The UE behaviour during time durations T2 and T3 shall be as follows:

During the time period T2 the UE is in Idle mode and the signal level of cell 2 is changed. The UE shall not perform reselection. The UE shall perform Idle Mode CA measurement according to Section 4.4.

At the start of T3 the UE is paged for connection setup. During the connection setup the UE is requested to transmit early measurement report for cell 2. The UE shall send early measurement report to the PCell.

After receiving the requested early measurement report, the test equipment verifies the accuracy of measurement reported for Cell 2 meets the requirements in Section 10.1.4B for SS-RSRP and in Section 10.1.8B for SS-RSRQ and test ends.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.10 CSI-RS based intra-frequency Measurements

A.6.6.10.1 SA event triggered reporting tests without gap under non-DRX

A.6.6.10.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA CSI-RS based L3 intra-frequency requirements in clauses 9.10.2.

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table A.6.6.10.1.1-1 and A.6.6.10.1.1-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.6.6.10.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.10.1.1-2: General test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified and measured.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CSI-RS configuration for RRM		1	CSI-RS.RRM.FR1.1 FDD	
		2	CSI-RS.RRM.FR1.1 TDD	
		3	CSI-RS.RRM.FR1.2 TDD	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
Time offset between serving and neighbour cells	μs	1	4.7	The timing of Cell 2 is CP later than the timing of Cell 1.
		2	4.7	
		3	2.35	
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	2	

Table A.6.6.10.1.1-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TN/A		TN/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1	

Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3	SSB		SSB	
N_{oc} ^{Note 2}	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$ for SSB	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/I_{ot}$ for CSI-RS	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$ for SSB	dB	1	4	4	-Infinity	4
		2				
		3				
$\hat{E}_s/N_{oc}$ for CSI-RS	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP ^{Note 3}	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
CSI-RSRP ^{Note 3}	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	--58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	CSI-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.6.6.10.1.2 Test Requirements

In this test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1600 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.11 CSI-RS based inter-frequency Measurements

A.6.6.11.1 SA event triggered reporting tests with gap under DRX

A.6.6.11.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA CSI-RS based L3 inter-frequency measurement requirements in clause 9.10.3.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.6.6.11.1.1-1, A.6.6.11.1.1-2 and A.6.6.11.1.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.6.6.11.1.1-2 is provided for UE that does not support per-FR gap and in test 2 measurement gap pattern configuration #4 as defined in Table A.6.6.11.1.1-2 is provided for UE that supports per-FR gap. If a UE supports per-FR gap and gap pattern configuration #4, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE is allocated with PUSCH resource at every DRX cycle.

NOTE: TAT= infinite based on the DRX configuration used in test.

Table A.6.6.11.1.1-1: SA event triggered reporting tests for FR1-FR1

Config	Description
1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.11.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0	4	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39	19	
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used

DRX		Config 1,2,3	DRX.5	DRX.5	As specified in clause A.3.3
Time offset between serving and neighbour cells	μ s	Config 1	4.7		The timing of Cell 2 is CP later than the timing of Cell 1.
		Config 2	4.7		
		Config 3	2.35		
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	21	21	

Table A.6.6.11.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	40: N _{RB,c} = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
CORESET Reference Channel			Config 1	CR.1.1 FDD		-	
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
SSB parameters			Config 1	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.2 FR1		SSB.6 FR1	
SMTC configuration defined in A.3.11			Config 1	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
CSI-RS configuration for RRM			Config 1	CSI-RS.RRM.FR1.1 FDD		CSI-RS.RRM.FR1.1 FDD	
			Config 2	CSI-RS.RRM.FR1.1 TDD		CSI-RS.RRM.FR1.1 TDD	
			Config 3	CSI-RS.RRM.FR1.2 TDD		CSI-RS.RRM.FR1.2 TDD	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	

EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz		-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2	-98		-98	
		Config 3	-95		-95	
CSI-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$ for SSB	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/I_{ot}$ for CSI-RS	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$ for SSB	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$ for CSI-RS	dB	Config 1,2,3	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	CSI-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					

A.6.6.11.1.2 Test Requirements

In test 1 with per-UE gap and test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 20480 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is required to read the SSB index indicated by associatedSSB in the neighbour cell in this test NOTE:

The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.12 RSTD measurements

A.6.6.12.1 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR1 SA

A.6.6.12.1.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 9.9.2 in an environment with AWGN propagation conditions in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations are specified in Table A.6.6.12.1.1-1.

Table A.6.6.12.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All 3 cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID # 24 or #0 before T2.

The general test parameters are listed in Table A.6.6.12.1.1-2, and cell specific test parameters are listed in Table A.6.6.12.1.1-3.

Table A.6.6.12.1.1-2: General test parameters for RSTD measurement reporting delay

Parameter	Unit	Value	Comment
Reference cell		Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells		Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.

SSB configuration	Config 1		SSB.1 FR1	
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMT-C configuration	Config 1		SMT-C.2	
	Config 2		SMT-C.1	
	Config 3		SMT-C.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET RMC configuration	Config 1		CR.1.1 FDD	As specified in clause A.3.1.2.1
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
Initial BWP configuration	Config 1,2,3		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration	Config 1,2,3		DLBWP.1.1	
Active UL BWP configuration	Config 1,2,3		ULBWP.1.1	
PRS Configuration	Config 1		PRS.1.1 FR1	As specified in clause A.3.31
	Config 2		PRS.1.1 FR1	
	Config 3		PRS.2.1 FR1	
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX			OFF	
Measurement gap			GP#24 or GP#0	GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured
Radio frame receive time offset between the cells at the UE antenna connector		µs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD		µs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells		µs	5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data			4	Including the reference cell

PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'	Correponds to prs-MutingInfo defined in TS 37.355 [34]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	s	1.28	The length of the time interval that follows immediately after time interval T1

Table A.6.6.12.1.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positioning frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	N/A	N/A
EPRE ratio of PSS to SSS		dB	0	N/A	N/A
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
N_{oc} ^{Note 3}	Config 1				
	Config 2	dBm/SCS	-98		
	Config 3	dBm/SCS	-95		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$		dB	10	-Infinity	-Infinity
I_0 ^{Note 4}	Config 1	dBm/ 19.08MHz	-56.54	-56.54	-56.54
	Config 2	dBm/ 19.08MHz	-56.54	-56.54	-56.54
	Config 3	dBm/ 47.88MHz	-52.56	-52.56	-52.56
SSB RP ^{Note4}	Config 1	dBm/SCS	-88	-Infinity	-Infinity
	Config 2	dBm/SCS	-88	-Infinity	-Infinity
	Config 3	dBm/SCS	-85	-Infinity	-Infinity

Propagation Condition		AWGN
Note 1:	OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.	
Note 2:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.	
Note 3:	Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.	
Note 4:	SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.	

Table A.6.6.12.1.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter	Unit	Cell 1	Cell 2	Cell 3
		T2	T2	T2
NR RF Channel Number		1	1	1
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1		OP.1	OP.1	OP.1
PRACH configuration		FR1 PRACH configuration 1	FR1 PRACH configuration 1	FR1 PRACH configuration 1
EPRE ratio of PSS to SSS	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-98	-98

	Config 2	dBm/SCS	-98	-98	-98
	Config 3	dBm/SCS	-95	-95	-95
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-5.45	-11.67	-11.67
	Config 2	dB	-5.45	-11.67	-11.67
	Config 3	dB	-5.45	-11.67	-11.67
SSB $\hat{E}_s/N_{oc}$	Config 1~3	dB	10	3	3
Io Note 4	Config 1	dBm/ 19.08MHz	-65.43	-65.43	-65.43
	Config 2	dBm/ 19.08MHz	-65.43	-65.43	-65.43
	Config 3	dBm/ 47.88MHz	-61.44	-61.44	-61.44
SSB RP Note4	Config 1	dBm/SCS	-88	-95	-95
	Config 2	dBm/SCS	-88	-95	-95
	Config 3	dBm/SCS	-85	-92	-92
PRS $\hat{E}_s/I_{ot}$		dB	-6.00	-12.98	-12.98
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.					
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 4: SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters. The Io is calculated based only on the symbols in which PRS is transmitted.					

A.6.6.12.1.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 9.9.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.2.5 starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{TTIDCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD1970049

A.6.6.12.2 NR RSTD measurement reporting delay test case for dual positioning frequency layers in FR1 SA

A.6.6.12.2.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 9.9.2 in an environment with AWGN propagation conditions in FR1 in standalone scenario when dual positioning frequency layers are configured.

The supported test configurations are specified in Table A.6.6.12.2.1-1.

Table A.6.6.12.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. Cell 3 is on a different RF channel with Cell 1 and Cell 2.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID # 24 or #0 before T2.

The general test parameters are listed in Table A.6.6.12.2.1-2, and cell specific test parameters are listed in Table A.6.6.12.2.1-3.

Table A.6.6.12.2.1-2: General test parameters for RSTD measurement reporting delay

Parameter	Unit	Value	Comment
Reference cell		Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.

Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first place in the respective neighbour cell list in the DL-TDOA assistance data for two positioning frequency layers.
SSB configuration	Config 1		SSB.1 FR1	
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET RMC configuration	Config 1		CR.1.1 FDD	As specified in clause A.3.1.2.1
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
Initial BWP configuration	Config 1,2,3		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration	Config 1,2,3		DLBWP.1.1	
Active UL BWP configuration	Config 1,2,3		ULBWP.1.1	
PRS Configuration	Config 1		PRS.1.1 FR1	As specified in clause A.3.31
	Config 2		PRS.1.1 FR1	
	Config 3		PRS.2.1 FR1	
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX			OFF	
Measurement gap			GP#24 or GP#0	GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured
Radio frame receive time offset between the cells at the UE antenna connector		μs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD		μs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells		μs	5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355[34] is the expectedRSTD-Uncertainty index

Number of cells provided in DL-TDOA assistance data		4	Including the reference cell
PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'	Correponds to prs-MutingInfo defined in TS 37.355 [34]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	s	1.28	The length of the time interval that follows immediately after time interval T1

Table A.6.6.12.2.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	2
Positioning frequency layer			1	1	2
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	N/A	N/A
EPRE ratio of PSS to SSS		dB	0	N/A	N/A
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
N_{oc} ^{Note 3}	Config 1				
	Config 2	dBm/SCS	-98		
	Config 3	dBm/SCS	-95		
$PR_S \hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
$SSB \hat{E}_s/N_{oc}$		dB	10	-Infinity	-Infinity
I_0 ^{Note 4}	Config 1	dBm/19.08MHz	-56.54	-56.54	-66.96
	Config 2	dBm/19.08MHz	-56.54	-56.54	--66.96
	Config 3	dBm/47.88MHz	-52.56	-52.56	-62.97
SSB RP ^{Note4}	Config 1	dBm/SCS	-88	-Infinity	-Infinity
	Config 2	dBm/SCS	-88	-Infinity	-Infinity

	Config 3	dBm/SCS	-85	-Infinity	-Infinity
Propagation Condition			AWGN		
Note 1:	OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.				
Note 2:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.				
Note 3:	Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 4:	SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.				

Table A.6.6.12.2.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1	Cell 2	Cell 3
			T2	T2	T2
NR RF Channel Number			1	1	2
Positioning frequency layer			1	1	2
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
EPRE ratio of PRS to SSS					
PRACH configuration			FR1 PRACH configuration 1	FR1 PRACH configuration 1	FR1 PRACH configuration 1
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-98	-98	-98
	Config 2	dBm/SCS	-98	-98	-98
	Config 3	dBm/SCS	-95	-95	-95

PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-5.7	-11.9	-13
	Config 2	dB	-5.7	-11.9	-13
	Config 3	dB	-5.7	-11.9	-13
I _o Note 4	Config 1	dBm/ 19.08MHz	-65.70	-65.70	-66.74
	Config 2	dBm/ 19.08MHz	-65.70	-65.70	-66.74
	Config 3	dBm/ 47.88MHz	-61.72	-61.72	-62.76
PRS $\hat{E}_s/I_{ot}$		dB	-6	-13	-13
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.					
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 4: SSB RP and I _o levels have been derived from other parameters and are given for information purpose. These are not settable test parameters. The I _o is calculated based only on the symbols in which PRS is transmitted.					

A.6.6.12.2.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 9.9.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.2.5 starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD_1970049.

A.6.6.12.3 NR RSTD measurement reporting delay test case for single positioning frequency layer with reduced number of samples in FR1 SA

A.6.6.12.3.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement with the reduced samples meets the requirements specified in Clause 9.9.2 in an environment with AWGN propagation conditions in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations are specified in Table A.6.6.12.3.1-1.

Table A.6.6.12.3.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All 3 cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance data* and location information request. UE can support *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED*, and the LMF indicates the UE to perform positioning measurements with reduced number of samples

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID # 24 or #0 before T2.

The general test parameters are listed in Table A.6.6.12.3.1-2, and cell specific test parameters are listed in Table A.6.6.12.3.1-3.

Table A.6.6.12.3.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
SSB configuration	Config 1		SSB.1 FR1	
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
	Config 3		SMTC.1	
	Config 1		SR.1.1 FDD	

PDSCH RMC configuration	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET RMC configuration	Config 1		CR.1.1 FDD	As specified in clause A.3.1.2.1
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Initial BWP configuration	Config 1,2,3		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration	Config 1,2,3		DLBWP.1.1	
Active UL BWP configuration	Config 1,2,3		ULBWP.1.1	
PRS Configuration	Config 1		PRS.1.2 FR1	As specified in clause A.3.31
	Config 2		PRS.1.2 FR1	
	Config 3		PRS.2.2 FR1	
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX			OFF	
Measurement gap			GP#24 or GP#0	GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured
Radio frame receive time offset between the cells at the UE antenna connector		µs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD		µs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells		µs	5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data			4	Including the reference cell
PRS muting info			Cell 1: '10' Cell 2: '01' Cell 3: '10'	Corresponds to prs-MutingInfo defined in TS 37.355 [34]
PRS resource RE offset			Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1		s	3	The length of the time interval from the beginning of each test
T2		s	1.28	The length of the time interval that follows immediately after time interval T1

Table A.6.6.12.3.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter	Unit	Cell 1	Cell 2	Cell 3
-----------	------	--------	--------	--------

NR RF Channel Number			1	1	1
Positioning frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	N/A	N/A
N_{oc} Note 3	Config 1	dBm/SCS	-98		
	Config 2	dBm/SCS	-98		
	Config 3	dBm/SCS	-95		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$		dB	10	-Infinity	-Infinity
I_o Note 4	Config 1	dBm/ 19.08MHz	-56.54	-56.54	-56.54
	Config 2	dBm/ 19.08MHz	-56.54	-56.54	-56.54
	Config 3	dBm/ 47.88MHz	-52.56	-52.56	-52.56
SSB RP Note4	Config 1	dBm/SCS	-88	-Infinity	-Infinity
	Config 2	dBm/SCS	-88	-Infinity	-Infinity
	Config 3	dBm/SCS	-88	-Infinity	-Infinity
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 4: SSB RP and I_o levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.					

Table A.6.6.12.3.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1	Cell 2	Cell 3
			T2	T2	T2
NR RF Channel Number			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
PRACH configuration			FR1 PRACH configuration 1	FR1 PRACH configuration 1	FR1 PRACH configuration 1
N_{oc} Note 3	Config 1	dBm/SCS	-98	-98	-98
	Config 2	dBm/SCS	-98	-98	-98
	Config 3	dBm/SCS	-95	-95	-95
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	1	-1.2	-1.2
	Config 2	dB	1	-1.2	-1.2

	Config 3	dB	1	-1.2	-1.2
I _O Note 4	Config 1	dBm/19.08MHz	-61.18	-61.18	-61.18
	Config 2	dBm/19.08MHz	-61.18	-61.18	-61.18
	Config 3	dBm/47.88MHz	-57.20	-57.20	-57.20
PRS $\hat{E}_s/I_{ot}$		dB	-3	-6	-6
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that active cells (all, except Cell 3 in T3) are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the subframes with transmitted PRS.					
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					

A.6.6.12.3.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 9.9.2.5

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration X1 specified in section 9.9.2.5 starting from the beginning of time interval T2, where X1 is 320ms.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD1970049.

A.6.6.12.4 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR1 SA without measurement gap

A.6.6.12.4.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the gapless RSTD measurement period requirement specified in Clause 9.9.2.7 in an environment with AWGN propagation conditions in FR1 in standalone scenario when single positioning frequency layer is configured. Reporting delay test for gapless PRS measurement is conducted assuming that the PRS has higher priority, i.e., state 1, than all other DL signals/channels and is transmitted within active DL BWP of UE. Two sub-tests are defined, sub-test 1 is for $N_{sample} = 4$ and sub-test 2 is for $N_{sample} = 1$. For sub-test 2 LMF indicates UE to perform PRS measurement with $N_{sample} = 1$. The cell specific parameters for sub-test 1 and sub-test 2 are defined in Table A.6.6.12.4.1-4.

The supported test configurations are specified in Table A.6.6.12.4.1-1.

Table A.6.6.12.4.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All 3 cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance data* and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first PPW instance containing the PRS resources.

The UE is configured with PPW before start of T2.

The general test parameters are listed in Table A.6.6.12.4.1-2, and cell specific test parameters are listed in Table A.6.6.12.4.1-3.

Table A.6.6.12.4.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
BW _{channel}	Config 1	MHz	20: N _{RB,c} = 106	
	Config 2		20: N _{RB,c} = 106	
	Config 3		50: N _{RB,c} = 133	
SSB configuration	Config 1		SSB.1 FR1	
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET RMC configuration	Config 1		CR.1.1 FDD	As specified in clause A.3.1.2.1
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	

Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Initial BWP configuration	Config 1,2,3		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration	Config 1,2,3		DLBWP.1.1	Cell 2 and cell 3 also transmit PRS on active DL BWP configured to the UE
Active UL BWP configuration	Config 1,2,3		ULBWP.1.1	
PRS Configuration	Config 1		PRS.1.4 FR1	As specified in clause A.3.31
	Config 2		PRS.1.4 FR1	
	Config 3		PRS.2.4 FR1	
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX			OFF	
PPW configuration			PPW.1	As defined in A.3.33
Time offset between serving and neighbour cells	μs	– set to the UE reported capability for receive time difference threshold if the UE reported value is < 3 μs – 3 μs otherwise		PRS are transmitted from synchronous cells
Expected RSTD	μs	0		The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells	μs	Same as time offset		The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		4		Including the reference cell
PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'		Corresponds to prs-MutingInfo defined in TS 37.355 [34]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1		Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3		The length of the time interval from the beginning of each test
T2	ms	10		The length of the time interval that follows after time interval T1 and processing time of assistance data. In this test UE is configured to measure single PFL within the configured PPW.

Table A.6.6.12.4.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positioning frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	N/A	N/A
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-98		
	Config 2	dBm/SCS	-98		
	Config 3	dBm/SCS	-95		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$		dB	10	-Infinity	-Infinity
I_o ^{Note 4}	Config 1	dBm/ 19.08MHz	-56.54	-56.54	-56.54
	Config 2	dBm/ 19.08MHz	-56.54	-56.54	-56.54
	Config 3	dBm/ 47.88MHz	-52.56	-52.56	-52.56
SSB RP ^{Note4}	Config 1	dBm/SCS	-88	-Infinity	-Infinity
	Config 2	dBm/SCS	-88	-Infinity	-Infinity
	Config 3	dBm/SCS	-88	-Infinity	-Infinity
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that active cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 4: SSB RP and I_o levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.					

Table A.6.6.12.4.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1		Cell 2		Cell 3	
			Sub-test 1	Sub-test 2	Sub-test 1	Sub-test 2	Sub-test 1	Sub-test 2
NR RF Channel Number			1		1		1	
Correlation Matrix and Antenna Configuration			1x2 Low		1x2 Low		1x2 Low	
OCNG patterns defined in A.3.2.1			OP.1		OP.1		OP.1	
PRACH configuration			FR1 PRACH configuration 1		FR1 PRACH configuration 1		FR1 PRACH configuration 1	
N_{oc} Note 3	Config 1,2	dBm/SCS	-98		-98		-98	
	Config 3	dBm/SCS	-95		-95		-95	

PRS $\hat{E}_s/N_{oc}$	Config 1,2,3	dB	-5.45	1	-11.67	-1.2	-11.67	-1.2
Io ^{Note 4}	Config 1,2	dBm/ 19.08MHz	-65.43	-61.18	-65.43	-61.18	-65.43	-61.18
	Config 3	dBm/ 47.88MHz	-61.44		-57.20		-61.44	
PRS $\hat{E}_s/I_{ot}$	Config 1,2,3	dB	-6	-3	-13	-6	-13	-6
PRS- RSRP ^{Note 4}	Config 1,2	dBm/SCS	-103.45	-97	-109.67	-99.2	-109.67	-99.2
	Config 3		-100.45	-94	-106.67	-96.2	-106.67	-96.2
SS- RSRP ^{Note 4}	Config 1,2	dBm/SCS	-88	-97	-88	-99.2	-88	-99.2
	Config 3		-85	-94	-85	-96.2	-85	-96.2
Propagation Condition			AWGN					
Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the subframes with transmitted PRS.								
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.								
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 4: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								

A.6.6.12.4.2 Test Requirements

The RSTD measurement time fulfils the gapless RSTD measurement period requirements specified in Clause 9.9.2.7.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.2.7 starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD1970049.

A.6.6.12.5 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR1 SA in RRC_CONNECTED state with Rx TEG

A.6.6.12.5.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the Rx TEG based measurement period requirements specified in Clause 9.9.2.5 in an environment with AWGN propagation conditions in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations are specified in Table A.6.6.12.5.1-1.

Table A.6.6.12.5.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All 3 cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID # 24 or #0 before T2.

The test applies to the UE supporting Rx TEG indicated via *NR-UE-TEG-Capability* and is requested to provide the Rx TEG in the test via *nr-UE-RxTEG-Request-r17* in *NR-TDOA-RequestLocationInformation*. In the location request *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* is set to n0. The UE shall perform and optionally report the Rx TEG based RSTD measurements.

The general test parameters are listed in Table A.6.6.12.5.1-2, and cell specific test parameters are listed in Table A.6.6.12.5.1-3.

Table A.6.6.12.5.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
BW _{channel}	Config 1	MHz	20: N _{RB,c} = 106	
	Config 2		20: N _{RB,c} = 106	
	Config 3		50: N _{RB,c} = 133	
SSB configuration	Config 1		SSB.1 FR1	
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	

SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET RMC configuration	Config 1		CR.1.1 FDD	As specified in clause A.3.1.2.1
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Initial BWP configuration	Config 1,2,3		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration	Config 1,2,3		DLBWP.1.1	
Active UL BWP configuration	Config 1,2,3		ULBWP.1.1	
PRS Configuration	Config 1		PRS.1.4 FR1	As specified in clause A.3.31
	Config 2		PRS.1.4 FR1	
	Config 3		PRS.2.4 FR1	
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX			OFF	
Measurement gap			GP#24 or GP#0	GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured
Radio frame receive time offset between the cells at the UE antenna connector	μs		Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD	μs		Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells	μs		5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data			4	Including the reference cell
PRS muting info			Cell 1: '10' Cell 2: '01' Cell 3: '10'	Corresponds to prs-MutingInfo defined in TS 37.355 [34]
PRS resource RE offset			Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s		3	The length of the time interval from the beginning of each test

T2	s	$[1.28 * k_{multiTEG}]^{Note\ 1}$	The length of the time interval that follows immediately after time interval T1
Note 1: 0 $k_{multiTEG} = \left\lceil \frac{N_{TEG}}{k_{TEG,simul}} \right\rceil$ if UE is capable of receiving the same DL PRS resource from the same TRP simultaneously from multiple Rx TEGs, where N_{TEG} is the maximum number of Rx TEGs with which UE can support to measure the same PRS resource, and $k_{TEG,simul}$ is the number of Rx TEGs UE can measure simultaneously which is reported via <i>measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul</i>.			

Table A.6.6.12.5.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positioning frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	N/A	N/A
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-98		
	Config 2	dBm/SCS	-98		
	Config 3	dBm/SCS	-95		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$		dB	10	-Infinity	-Infinity
I_o ^{Note 4}	Config 1	dBm/ 19.08MHz	-56.54	-56.54	-56.54
	Config 2	dBm/ 19.08MHz	-56.54	-56.54	-56.54
	Config 3	dBm/ 47.88MHz	-52.56	-52.56	-52.56
SSB RP ^{Note4}	Config 1	dBm/SCS	-88	-Infinity	-Infinity
	Config 2	dBm/SCS	-88	-Infinity	-Infinity
	Config 3	dBm/SCS	-88	-Infinity	-Infinity
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 4: SSB RP and I_o levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.					

Table A.6.6.12.5.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter	Unit	Cell 1	Cell 2	Cell 3
		T2	T2	T2
NR RF Channel Number		1	1	1

Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
PRACH configuration			FR1 PRACH configuration 1	FR1 PRACH configuration 1	FR1 PRACH configuration 1
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-98	-98	-98
	Config 2	dBm/SCS	-98	-98	-98
	Config 3	dBm/SCS	-95	-95	-95
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-5.45	-11.67	-11.67
	Config 2	dB	-5.45	-11.67	-11.67
	Config 3	dB	-5.45	-11.67	-11.67
I_o ^{Note 4}	Config 1	dBm/19.08MHz	-65.43	-65.43	-65.43
	Config 2	dBm/19.08MHz	-65.43	-65.43	-65.43
	Config 3	dBm/47.88MHz	-61.44	-61.44	-61.44
PRS $\hat{E}_s/I_{ot}$		dB	-6	-13	-13
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the subframes with transmitted PRS.					
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					

A.6.6.12.5.2 Test Requirements

The RSTD measurement time fulfils the Rx TEG based RSTD measurement period requirements specified in Clause 9.9.2.5. The UE shall perform and report the Rx TEG based RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.2.5 starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD1970049.

A.6.6.13 PRS-RSRP measurements

A.6.6.13.1 PRS-RSRP reporting delay test case for single positioning frequency layer

A.6.6.13.1.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRP measurement meets the delay requirements specified in clause 9.9.3.5 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.6.13.1.1-1.

Table A.6.6.13.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The test consists of two consecutive time intervals, with duration of T1 and T2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.6.13.1.1-2, and cell specific test parameters are listed in Table A.6.6.13.1.1-3.

Table A.6.6.13.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
BW _{channel}	MHz	1	20: N _{RB,c} = 106	
		2	20: N _{RB,c} = 106	
		3	50: N _{RB,c} = 133	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 ^{Note 1}	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	NA	OFF

Time offset between serving and neighbour cells	μ s	1, 2, 3	3	Synchronous cells
Expected RSTD	μ s	1, 2, 3	3	
Expected RSTD uncertainty	μ s	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	5	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.13.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1, 2, 3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	

Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	
		2	PRS.1.4 FR1		PRS.1.4 FR1	
		3	PRS.2.4 FR1		PRS.2.4 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-3.41	-Infinity	-11.76
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dBm/SCS kHz	1	-Infinity		-Infinity	-108
		2	-Infinity	-100 -100	-Infinity	-108
		3	-Infinity	-97	-Infinity	-105
PRP Note 3						
Io	dBm/19.08 MHz	1	N/A	-64.57	N/A	-64.57
	dBm/19.08 MHz	2		-64.57		-64.57
	dBm/47.88 MHz	3		-60.59		-60.59
Propagation Condition		1, 2, 3	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.6.13.1.2 Test Requirements

The UE shall perform and report the PRS-RSRP measurements for Cell 1 and Cell 2, within the time limit specified in clause 9.9.3.5, starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time limit above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.13.2 PRS-RSRP reporting delay test case for dual positioning frequency layer

A.6.6.13.2.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRP measurement meets the delay requirements specified in clause 9.9.3.5 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.6.13.2.1-1.

Table A.6.6.13.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell on NR RF channel #1 in FR1. Cell 2 is a neighbour cell on a different NR RF channel #2 in FR1. The test consists of two consecutive time intervals, with duration of T1 and T2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.6.13.2.1-2, and cell specific test parameters are listed in Table A.6.6.13.2.1-3.

Table A.6.6.13.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2	Cell 1 and Cell 2 are on different positioning frequency layers
BW _{channel}	MHz	1	20: N _{RB,c} = 106	
		2	20: N _{RB,c} = 106	
		3	50: N _{RB,c} = 133	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 ^{Note 1}	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	NA	OFF

Time offset between serving and neighbour cells	μs	1, 2, 3	3	Synchronous cells
Expected RSTD	μs	1, 2, 3	3	
Expected RSTD uncertainty	μs	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	10	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.13.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1, 2, 3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	

Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	
		2	PRS.1.4 FR1		PRS.1.4 FR1	
		3	PRS.2.4 FR1		PRS.2.4 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-3	-Infinity	-13
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-3	-Infinity	-13
		2				
		3				
PRP Note 3	dBm/SCS kHz	1	-Infinity	-101	-Infinity	-111
		2	-Infinity	-101	-Infinity	-111
		3	-Infinity	-98	-Infinity	-108
Io	dBm/19.08 MHz	1	N/A	-65.19	N/A	-66.74
	dBm/19.08 MHz	2		-65.19		-66.74
	dBm/47.88 MHz	3		-61.21		-62.76
Propagation Condition		1, 2, 3	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.6.13.2.2 Test Requirements

The UE shall perform and report the PRS-RSRP measurements for Cell 1 and Cell 2, within the time limit specified in clause 9.9.3.5, starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time limit above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.13.3 PRS-RSRP reporting delay test case for reduced number of samples

A.6.6.13.3.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRP measurement meets the delay requirements for reduced number of samples specified in clause 9.9.3.5 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.6.13.3.1-1.

Table A.6.6.13.3.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The test consists of two consecutive time intervals, with duration of T1 and T2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.6.13.3.1-2, and cell specific test parameters are listed in Table A.6.6.13.3.1-3.

Table A.6.6.13.3.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
BW _{channel}	MHz	1	20: N _{RB,c} = 106	
		2	20: N _{RB,c} = 106	
		3	50: N _{RB,c} = 133	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 ^{Note 1}	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	NA	OFF
Time offset between serving and neighbour cells	μs	1, 2, 3	3	Synchronous cells
Expected RSTD	μs	1, 2, 3	3	
Expected RSTD uncertainty	μs	1, 2, 3	5	

T1	s	1, 2, 3	2	
T2	s	1, 2, 3	5	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.13.3.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1, 2, 3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
EPRE ratio of PRS to SSS						
TRS Configuration						
	2	TRS.1.1 TDD				
	3	TRS.1.2 TDD				
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	
		2	PRS.1.4 FR1		PRS.1.4 FR1	
		3	PRS.2.4 FR1		PRS.2.4 FR1	

		1, 2, 3	'10'		'01'	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	0	-Infinity	-6
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	2.23	-Infinity	-1.73
		2				
		3				
PRP Note 3	dBm/SCS kHz	1	-Infinity	-95.77	-Infinity	-99.73
		2	-Infinity	-95.77	-Infinity	-99.73
		3	-Infinity	-92.77	-Infinity	-96.73
Io	dBm/19.08 MHz	1	N/A	-61.71	N/A	-61.71
	dBm/19.08 MHz	2		-61.71		-61.71
	dBm/47.88 MHz	3		-57.73		-57.73
Propagation Condition		1, 2, 3	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						

A.6.6.13.3.2 Test Requirements

The UE shall perform and report the PRS-RSRP measurements for Cell 1 and Cell 2, within the time limit for reduced number of samples specified in clause 9.9.3.5, starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.13.4 PRS-RSRP reporting delay test case for single positioning frequency layer outside MG

A.6.6.13.4.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRP measurement outside MG meets the delay requirements specified in clause 9.9.3.6 in an environment with AWGN propagation conditions. There are two sub-tests in the

test, sub-test 1 is to verify the delay requirements with $N_{\text{sample}}=1$, and sub-test 2 is to verify the delay requirements with $N_{\text{sample}}=4$.

The supported test configurations are specified in Table A.6.6.13.4.1-1.

Table A.6.6.13.4.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The test consists of two consecutive time intervals, with duration of T1 and T2. Both cells transmit PRS during T2. The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n. In sub-test 1, *reducedDL-PRS-ProcessingSamples* shall be included in the location information request and set to 'requested'.

During T1, a PPW shall be configured for the PCell and be activated via DL MAC CE. The last PDSCH containing the MAC CE shall be transmitted before slot #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first PPW instance containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.6.13.4.1-2, and cell specific test parameters during T2 are listed in Table A.6.6.13.4.1-3.

Table A.6.6.13.4.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
BW _{channel}	MHz	1	20: $N_{RB,c} = 106$	
		2	20: $N_{RB,c} = 106$	
		3	50: $N_{RB,c} = 133$	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTc configuration		1	SMTc.2	
		2	SMTc.1	
		3	SMTc.1	
PPW configuration		1	PPW.1	As defined in A.3.33
		2	PPW.1	As defined in A.3.33
		3	PPW.1	As defined in A.3.33
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	NA	OFF

Time offset between serving and neighbour cells	μs	1	3	
		2	3	
		3	3 or 2.34 ^{Note 1}	
Expected RSTD	μs	1, 2, 3	0	
Expected RSTD uncertainty	μs	1, 2, 3	Same as time offset between serving and neighbour cells	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	5	
NOTE 1: If UE indicates support of CP length for the receive time difference threshold, the time offset is set to 2.34 μs , otherwise 3 μs .				

Table A.6.6.13.4.1-3: Cell specific test parameters during T2

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			Sub-test 1	Sub-test 2	Sub-test 1	Sub-test 2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	
		2	PRS.1.4 FR1		PRS.1.4 FR1	
		3	PRS.2.4 FR1		PRS.2.4 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
N_{oc} ^{Note 2}	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	0	-2.41	-6	-12.12
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	2.23	-2	-1.73	-10
		2				
		3				
PRS-RSRP ^{Note 3}	dBm/SCS kHz	1	-95.77	-100	-99.73	-108
		2	-95.77	-100	-99.73	-108
		3	-92.77	-97	-96.73	-105

SS-RSRP ^{Note 3}	dBm/SCS kHz	1	-101	-101	-104	-108
		2	-101	-101	-104	-108
		3	-98	-98	-101	-105
Io	dBm/19.08 MHz	1	-61.71	-64.57	-61.71	-64.57
	dBm/19.08 MHz	2	-61.71	-64.57	-61.71	-64.57
	dBm/47.88 MHz	3	-57.73	-60.59	-57.73	-60.59
Propagation Condition		1, 2, 3	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP/PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.6.6.13.4.2 Test Requirements

The UE shall perform and report the PRS-RSRP measurements for Cell 1 and Cell 2, within the time limit specified in clause 9.9.3.6, starting from the beginning of time interval T2, with Nsample=1 for sub-test 1 and Nsample=4 for sub-test 2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.14 UE Rx-Tx time difference measurements

A.6.6.14.1 UE Rx-Tx time difference measurement for single positioning frequency layer in FR1 SA

A.6.6.14.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.5 in AWGN propagation condition in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations in listed in Table A.6.6.14.1.1-1.

Table A.6.6.14.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the multi-RTT assistance data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID #0 or ID #24 before T2.

The UE is configured to transmit positioning SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.6.14.1.1-2 and Table A.6.6.14.1.1-3 respectively.

Table A.6.6.14.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	Cell 1 is the PCell in <i>NR-Multi-RTT-ProvideAssistanceData</i> [34].
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in <i>NR-Multi-RTT-ProvideAssistanceData</i> [34].
RF Channel Number		1, 2, 3	1	For both Cell 1 and Cell 2
BW _{channel}	MHz	1	10: N _{RB,c} = 52	
		2	10: N _{RB,c} = 52	
		3	40: N _{RB,c} = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 ^{Note 1}	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	OFF	
Time offset between serving and neighbour cells	μs	1, 2, 3	3	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	10	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.14.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			

OCNG Patterns		1, 2, 3	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1, 2, 3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.2 FR1		PRS.1.2 FR1	
		2	PRS.1.2 FR1		PRS.1.2 FR1	
		3	PRS.2.2 FR1		PRS.2.2 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
SRS configuration		1	POS-SRS.1		N/A	
		2	POS-SRS.1		N/A	
		3	POS-SRS.2		N/A	
N_{oc} ^{Note 2}	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41	-Infinity	-12.12
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2	-Infinity	-10
		2				
		3				
PRP ^{Note 3}	dBm/SCS kHz	1	-Infinity	-100	-Infinity	-108
		2	-Infinity	-100	-Infinity	-108
		3	-Infinity	-97	-Infinity	-105
Io	dBm/19.08 MHz	1	N/A	-64.57	N/A	-64.57
	dBm/19.08 MHz	2		-64.57		-64.57
	dBm/47.88 MHz	3		-60.59		-60.59
Propagation Condition		1, 2, 3	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.6.14.1.1-4: Void**A.6.6.14.1.2 Test requirements**

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.5.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.6.6.14.2 UE Rx-Tx time difference measurement for dual positioning frequency layers in FR1 SA**A.6.6.14.2.1 Test purpose and environment**

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.5 in AWGN propagation condition in FR1 in standalone scenario when dual positioning frequency layers are configured.

The supported test configurations in listed in Table A.6.6.9.2.1-1.

Table A.6.6.14.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Cell 1 and Cell2 are on different RF channels in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the multi-RTT assistance data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID #0 or ID #24 before T2.

The UE is configured to transmit positioning SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.6.14.2.1-2 and Table A.6.6.14.2.1-3 respectively.

Table A.6.6.14.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	Cell 1 is the PCell in <i>NR-Multi-RTT-ProvideAssistanceData</i> [34].
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in <i>NR-Multi-RTT-ProvideAssistanceData</i> [34].
RF Channel Number		1, 2, 3	1	For Cell 1
RF Channel Number		1, 2, 3	2	For Cell 2
BW _{channel}	MHz	1	20: N _{RB,c} = 106	
		2	20: N _{RB,c} = 106	
		3	50: N _{RB,c} = 133	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 ^{Note 1}	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	OFF	
Time offset between serving and neighbour cells	μs	1, 2, 3	3	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	10	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.14.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1, 2, 3	0		0	

EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.2 FR1		PRS.1.2 FR1	
		2	PRS.1.2 FR1		PRS.1.2 FR1	
		3	PRS.2.2 FR1		PRS.2.2 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
SRS configuration		1	POS-SRS.1		N/A	
		2	POS-SRS.1		N/A	
		3	POS-SRS.2		N/A	
N_{oc} ^{Note 2}	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-3	-Infinity	-13
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-3	-Infinity	-13
		2				
		3				
PRP ^{Note 3}	dBm/SCS kHz	1	-Infinity	-101	-Infinity	-111
		2	-Infinity	-101	-Infinity	-111
		3	-Infinity	-98	-Infinity	-108
Io	dBm/19.08 MHz	1	N/A	-65.19	N/A	-66.74
	dBm/19.08 MHz	2		-65.19		-66.74
	dBm/47.88 MHz	3		-61.21		-62.76
Propagation Condition		1, 2, 3	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.6.6.14.2.1-4: Void**A.6.6.14.2.2 Test requirements**

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.5.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.6.6.14.3 UE Rx-Tx time difference measurement for single positioning frequency layer in FR1 SA with reduced sample number**A.6.6.14.3.1 Test purpose and environment**

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.5 with $N_{sample} = 1$ in AWGN propagation condition in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations in listed in Table A.6.6.14.3.1-1.

Table A.6.6.14.3.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. *reducedDL-PRS-ProcessingSamples* shall be included in the location information request and set to 'requested'. The last TTI containing the two messages shall be

provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the multi-RTT assistance data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID #0 or ID #24 before T2.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.6.14.3.1-2 and Table A.6.6.14.3.1-3 respectively.

Table A.6.6.14.3.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	Cell 1 is the PCell in <i>NR-Multi-RTT-ProvideAssistanceData</i> [34].
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in <i>NR-Multi-RTT-ProvideAssistanceData</i> [34].
RF Channel Number		1, 2, 3	1	For both Cell 1 and Cell 2
BW _{channel}	MHz	1	20: N _{RB,c} = 106	
		2	20: N _{RB,c} = 106	
		3	50: N _{RB,c} = 133	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 ^{Note 1}	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	OFF	
Time offset between serving and neighbour cells	μs	1, 2, 3	3	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	10	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.14.3.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	

TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.2 FR1		PRS.1.2 FR1	
		2	PRS.1.2 FR1		PRS.1.2 FR1	
		3	PRS.2.2 FR1		PRS.2.2 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
SRS configuration		1	POS-SRS.1		N/A	
		2	POS-SRS.1		N/A	
		3	POS-SRS.2		N/A	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	0	-Infinity	-6
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	2.23	-Infinity	-1.73
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-95.77	-Infinity	-99.73
		2	-Infinity	-95.77	-Infinity	-99.73
		3	-Infinity	-92.77	-Infinity	-96.73
SS-RSRP Note 3	dBm/SCS kHz	1	-100	-100	-Infinity	-104
		2	-100	-100	-Infinity	-104
		3	-97	-97	-Infinity	-101
Io	dBm/19.08 MHz	1	N/A	-61.71	N/A	-61.71
	dBm/19.08 MHz	2		-61.71		-61.71
	dBm/47.88 MHz	3		-57.73		-57.73
Propagation Condition		1, 2, 3	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.6.14.3.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.5 with $N_{sample}=1$.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.6.6.14.4 UE Rx-Tx time difference measurement without gaps in FR1 SA

A.6.6.14.4.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.6 in AWGN propagation condition in FR1 in standalone scenario. There are two sub-tests in the test, sub-test 1 is to verify the delay requirements with $N_{\text{sample}}=1$, and sub-test 2 is to verify the delay requirements with $N_{\text{sample}}=4$.

The supported test configurations in listed in Table A.6.6.14.4.1-1.

Table A.6.6.14.4.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the multi-RTT assistance data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of PRS processing window containing the PRS resources.

The UE is configured with PRS processing window before T2.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.6.14.4.1-2 and Table A.6.6.14.4.1-3 respectively.

Table A.6.6.14.4.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
-----------	------	--------------------	-------	---------

Active cell		1, 2, 3	Cell 1	Cell 1 is the PCell in <i>NR-Multi-RTT-ProvideAssistanceData</i> [34].
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in <i>NR-Multi-RTT-ProvideAssistanceData</i> [34].
RF Channel Number		1, 2, 3	1	For both Cell 1 and Cell 2
BW _{channel}	MHz	1	20: N _{RB,c} = 106	
		2	20: N _{RB,c} = 106	
		3	50: N _{RB,c} = 133	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
PRS processing window		1,2,3	PPW.1	As defined in A.3.33
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	OFF	
Time offset between serving and neighbour cells	μs	1	3 ^{Note1}	
		2	3 ^{Note1}	
		3	3 or 2.34 ^{Note1}	
Expected RSTD	μs	1,2,3	0	
Expected RSTD uncertainty	μs	1,2,3	Same as time offset between serving and neighbour cells	
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	10	
NOTE 1: The value is up to the UE capability. The possible UE capability value: (1/4 symbol, 1/2 symbol, CP length, half of slot). When the UE reported value is > 3μs, the time offset between serving and neighbour cells is set to 3μs; when the UE reported value is < 3μs, the time offset between serving and neighbour cells is set to the UE reported value.				

Table A.6.6.14.4.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			Sub-test 1	Sub-test 2	Sub-tets 1	Sub-test 2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			

Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.2 FR1		PRS.1.2 FR1	
		2	PRS.1.2 FR1		PRS.1.2 FR1	
		3	PRS.2.2 FR1		PRS.2.2 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
SRS configuration		1	POS-SRS.1		N/A	
		2	POS-SRS.1		N/A	
		3	POS-SRS.2		N/A	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	0	-2.41	-6	-12.12
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	2.23	-2	-1.73	-10
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-95.77	-100	-99.73	-108
		2	-95.77	-100	-99.73	-108
		3	-92.77	-97	-96.73	-105
Io	dBm/19.08 MHz	1	-61.71	-64.57	-61.71	-64.57
	dBm/19.08 MHz	2	-61.71	-64.57	-61.71	-64.57
	dBm/47.88 MHz	3	-57.73	-60.59	-57.73	-60.59
Propagation Condition		1, 2, 3	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: PRS-RSRP levels have been derived from other parameters for information purposes. They are not setttable parameters themselves.						

A.6.6.14.4.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.6.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.6.6.14.5 UE Rx-Tx time difference measurement for single positioning frequency layer in FR1 SA with multiple RxTx TEGs

A.6.6.14.4.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.5 in AWGN propagation condition in FR1 in standalone scenario when single positioning frequency layer is configured, and when UE is requested to measure a PRS resource with multiple RxTx TEGs.

The supported test configurations in listed in Table A.6.6.14.4.1-1.

Table A.6.6.14.4.11: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the multi-RTT assistance data and location information request. In *nr-Multi-RTT-RequestLocationInformation*, *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* shall be set to 'n2'.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID #0 or ID #24 before T2.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.6.14.4.1-2 and Table A.6.6.14.4.1-3 respectively.

Table A.6.6.14.4.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	Cell 1 is the PCell in <i>NR-Multi-RTT-ProvideAssistanceData</i> [34].
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in <i>NR-Multi-RTT-ProvideAssistanceData</i> [34].
RF Channel Number		1, 2, 3	1	For both Cell 1 and Cell 2
BW _{channel}	MHz	1	20: N _{RB,c} = 106	
		2	20: N _{RB,c} = 106	
		3	50: N _{RB,c} = 133	
SSB configuration		1	SSB.1 FR1	

		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 ^{Note 1}	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	OFF	
Time offset between serving and neighbour cells	μs	1, 2, 3	3	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	10	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.14.4.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.2 FR1		PRS.1.2 FR1	
		2	PRS.1.2 FR1		PRS.1.2 FR1	
		3	PRS.2.2 FR1		PRS.2.2 FR1	
PRS muting info		1, 2, 3	‘10’		‘01’	
SRS configuration		1	POS-SRS.1		N/A	
		2	POS-SRS.1		N/A	
		3	POS-SRS.2		N/A	
N_{oc} ^{Note 2}	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41	-Infinity	-12.12
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2	-Infinity	-10
		2				
		3				

PRS-RSRP ^{Note 3}	dBm/SCS kHz	1	-Infinity	-100	-Infinity	-108
		2	-Infinity	-100	-Infinity	-108
		3	-Infinity	-97	-Infinity	-105
I _o	dBm/19.08 MHz	1	N/A	-64.57	N/A	-64.57
	dBm/19.08 MHz	2		-64.57		-64.57
	dBm/47.88 MHz	3		-60.59		-60.59
Propagation Condition		1, 2, 3	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.6.6.14.4.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.5, with $k_{multiTEG}=2$ if UE does not support or indicate value 'n1' for *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul*, and $k_{multiTEG}=1$ otherwise.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.6.6.15 Idle Mode measurements of inter-RAT DC candidate cells for early reporting

A.6.6.15.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly retains the detected cell status for the idle mode CA/DC measurement when UE transitions from RRC Connected mode to Idle mode, when the UE has entered Idle mode. Additionally, test that the UE performs the required measurements on the serving cell and the configured inter-RAT carrier for idle mode measurement reporting. This test will partly verify the Idle mode CA measurements in clause 4.4. In the test, connected mode DRX configuration is not configured in either PCell or PSCell.

Additionally, the purpose of this test is to verify that the SS-RSRP, SS-RSRQ, RSRP and RSRQ measurement accuracy is within the specified limits. This test will verify the accuracy requirements in Sections 10.1.2B and 10.1.7B for intra-frequency measurements and section 10.2.2 and 10.2.3 for the inter-RAT measurements for the supported test configurations in tables A.6.6.15.1-4 and A.6.6.15.1-5.

The supported test configurations are given in Table A.6.6.15.1-1. The test parameters are given in Tables A.6.6.15.1-2, A.6.6.15.1-3, A.6.6.15.1-4 and A.6.6.15.1-5 below. In the test there are two cells, cell 1, which is the PCell in connected, and serving cell in idle mode, on radio channel 1 in FR1, and cell 2, which is the PSCell in connected, and measured LTE inter-RAT cell in idle mode, on radio channel 2 in LTE.

For the purpose of testing absolute accuracy in idle mode in this set of test cases the cells in idle mode are on different carrier frequencies (NR FR1 and LTE). The absolute accuracy of RSRP and RSRQ inter-RAT measurements are tested by using the parameters in Table A.6.6.15.1-4 and Table A.6.6.15.1-5. In all test cases, Cell 1 is the serving and Cell 2 the target cell.

The test consists of 5 successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. During T1 cell 2, the PSCell, shall be configured.

Time duration T2 starts when UE has transmitted random access preamble on the PSCell. During T2, the UE is configured with idle mode CA measurements with the PSCell carrier as the target carrier. The connection is released 500 ms after T2 when the UE has sent random access preamble on the PSCell.

T3 starts when the connection is released. During the time periods T3 and T4 the UE is in Idle mode with the serving cell on the FR1 carrier. The UE is configured to perform inter-RAT idle mode CA/DC measurements on Cell 2 carrier. After the connection release and during T3, 1000 ms after T3 is started, the signal level of the inter-RAT carrier configured for idle mode CA/DC measurements is changed at which time T4 starts. T5 starts 65s after T4, when the UE is paged for connection setup and UE is requested by the network to report idle mode CA/DC measurements.

Table A.6.6.15.1-1: Supported test configurations for Idle Mode measurements of inter-RAT DC candidate cells for early reporting

Config	Description
1	FR1 FDD SSB SCS 15kHz BW 10MHz – LTE FDD 10MHz
2	FR1 FDD SSB SCS 15kHz BW 10MHz – LTE TDD 10MHz
3	FR1 TDD SSB SCS 30kHz BW 40MHz – LTE FDD 10MHz
4	FR1 TDD SSB SCS 30kHz BW 40MHz – LTE TDD 10MHz
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.6.6.15.1-2: General test parameters for Idle Mode measurements of inter-RAT DC candidate cells for early reporting

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1 in FR1
PSCell		Cell 2	PSCell on RF channel number 2 in LTE. Cell 2 is of higher priority.
DRX		OFF	For both PCell and PSCell once configured
PRACH configuration in Cell 2		PRACH_2CE	PRACH configuration as specified in Clause A.3.16 in TS 36.133
T331	s	300	
CSI reporting periodicity and offset configuration for Cell 2	ms	2	
T1	s	0.5	During this time the PCell is known and PSCell is configured.
T2	s	0.5	PSCell access.
T3 + T4	s	66	During this time the UE is configured to perform inter-RAT measurements in idle mode on the PSCell carrier.
T5	s	0.5	UE is paged and connection is setup. Network requests measurement report from the UE.

Table A.6.6.15.1-3: Cell specific test parameters for NR cell for Idle Mode measurements of inter-RAT DC candidate cells for early reporting

Parameter	Unit	Config	Test 1				
			Cell 1				
			T1	T2	T3	T4	T5
AoA setup		1,2,3,4	N/A				
Assumption for UE beams ^{Note 5} R: Rough		1,2,3,4	N/A	N/A	R	R	N/A
Frequency Range		1,2,3,4	FR1				
Duplex mode		1, 2	FDD				
		3, 4	TDD				
TDD Configuration 1: TDDConf.1.1 2: TDDConf.2.1		1,2	-				
		3,4	1	1	2	2	1
BW _{channel} 1: 10: N _{RB,c} = 52 2: 40: N _{RB,c} = 106	MHz	1, 2	1	1	-	-	1
		3, 4	2	2	-	-	2
Initial Downlink BWP configuration		1,2,3,4	DLBWP.0.1				
Initial Uplink BWP configuration		1,2,3,4	ULBWP.0.1				
Dedicated Downlink BWP configuration 1: DLBWP.1.1		1,2,3,4	1	1	-	-	1
Dedicated Uplink BWP configuration 1: ULBWP.1.1		1,2,3,4	1	1	-	-	1
PDSCH Reference Measurement Channel 1: SR.1.1 FDD 2: SR.2.1 TDD	FDD	1,2	1	1	1	1	1
	TDD	3,4	2	2	2	2	2
TRS configuration		1,2,3,4	-				
TCI state		1,2,3,4	-				
RMSI CORESET parameters	FDD	1,2	CR.1.1 FDD				
	TDD	3,4	CR.2.1 TDD				
Dedicated CORESET parameters	FDD	1,2	CCR.1.1 FDD				
	TDD	3,4	CCR.2.1 TDD				
OCNG Patterns ^{Note1}		1,2,3,4	OP.1 defined in A.3.2.1				
SSB configuration 1: SSB.1 FR1 2: SSB.2 FR1		1,2	1				
		3,4	2				
SMTC configuration		1,2,3,4	SMTC.2				
Correlation Matrix and Antenna config		1,2,3,4	1x2 Low				
EPRE ratio of PSS to SSS	dB	1,2,3,4	0	0	-	-	0
EPRE ratio of PBCH DMRS to SSS			0	0	-	-	0
EPRE ratio of PBCH to PBCH DMRS			0	0	-	-	0
EPRE ratio of PDCCH DMRS to SSS			0	0	-	-	0
EPRE ratio of PDCCH to PDCCH DMRS			0	0	-	-	0
EPRE ratio of PDSCH DMRS to SSS			0	0	-	-	0
EPRE ratio of PDSCH to PDSCH			0	0	-	-	0
EPRE ratio of OCNG DMRS to SSS			0	0	-	-	0
N _{oc} ^{Note2}	dBm/ 15kHz	1,2	-98	-98	-98	-98	-98
		3,4					

N _{oc} ^{Note2}	dBm/SCS	1,2	-98	-98	-98	-98	-98
		3,4	-95	-95	-95	-95	-95
$\hat{E}_s/I_{ot}$	dB	1,2,3,4	5	5	5	5	5
$\hat{E}_s/N_{oc}$	dB	1,2,3,4	5	5	5	5	5
SS-RSRP ^{Note3,4}	dBm/SCS	1,2	-93	-93	-93	-93	-93
		3,4	-90	-90	-90	-90	-90
I _o ^{Note3,4}	dBm/ 9.36 MHz	1,2	-63.85	-63.85	-63.85	-63.85	-63.85
	dBm/ 38.16 MHz	3,4	-57.76	-57.76	-57.76	-57.76	-57.76
Q _{rxlevmin}	dBm/SCS	1, 2	-	-	-140		-
		3, 4	-	-	-137		-
P _{compensation}	dB	1,2,3,4	-	-	0	0	-
Q _{hyst_s}	dB	1,2,3,4	-	-	0	0	-
Q _{offset_{s, n}}	dB	1,2,3,4	-	-	0	0	-
Cell_selection_and_reselection_quality_measurement		1,2,3,4	SS-RSRP				
T _{reselection}	s	1,2,3,4	-		0		-
S _{nonintrasearchP}	dB	1,2,3,4	-		Not Sent		-
S _{nonintrasearchQ}	dB	1,2,3,4	-		Not Sent		-
Thresh _{x, high}	dB	1,2,3,4	-		48		-
Thresh _{serving, low}	dB	1,2,3,4	-		44		-
Thresh _{x, low}	dB	1,2,3,4	-		50		-
Propagation Condition	dB	1,2,3,4	-		AWGN		-
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3:	SSB_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4:	SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

Table A.6.6.15.1-4: Cell specific test parameters for LTE cell for Idle Mode measurements of inter-RAT DC candidate cells for early reporting

Parameter	Unit	Config	Test 1				
			Cell 2				
			T1	T2	T3	T4	T5
Frequency Range		1,2,3,4	LTE				
Duplex mode		1, 3	FDD				
		2, 4	TDD				
BW _{channel}	MHz	1,2,3,4	10	10	-	-	10
Measurement bandwidth	n_{PRB}	1,2,3,4	-	-	22-27	22-27	-
PDSCH Reference Measurement Channel 1: R.1 FDD 2: R.1 TDD	FDD	1,3	1	1	-	-	1
	TDD	2,4	2	2	-	-	2
		1,3	1	1	-	-	1

PDCCH/PCFICH/PHICH Reference measurement channel defined in A.3.1.2.1 and A.3.1.2.2 in 36.133 1: R.6 FDD 2: R.6 TDD		2,4	2	2	-	-	2		
OCNG Patterns defined in A.3.2.1.1 (OP.2 FDD) and A.3.2.1.2 (OP.2 TDD) in 36.133 1: OP.2 FDD 2: OP.2 TDD		1,3	1						
		2,4	2						
Correlation Matrix and Antenna config		1,2,3,4	1x2 Low						
PBCH_RA	dB	1,2,3,4	N/A	N/A	0	0	N/A		
PBCH_RB			N/A	N/A	0	0	N/A		
PSS_RA			N/A	N/A	0	0	N/A		
SSS_RA			N/A	N/A	0	0	N/A		
PCFICH_RB			N/A	N/A	0	0	N/A		
PHICH_RA			N/A	N/A	0	0	N/A		
PHICH_RB			N/A	N/A	0	0	N/A		
PDCCH_RA			N/A	N/A	0	0	N/A		
PDCCH_RB			N/A	N/A	0	0	N/A		
PDSCH_RA			N/A	N/A	0	0	N/A		
PDSCH_RB			N/A	N/A	0	0	N/A		
OCNG_RA ^{Note 1}			N/A	N/A	0	0	N/A		
OCNG_RB ^{Note 1}			N/A	N/A	0	0	N/A		
N _{oc} ^{Note2}			dBm/ 15kHz	1,2 3,4	-98	-98	-98	-98	-98
$\hat{E}_s/I_{ot}$			dB	1,2,3,4	5	5	-3	8	5
$\hat{E}_s/N_{oc}$	dB	1,2,3,4	5	5	-3	8	5		
SS-RSRP ^{Note3,4}	dBm/SCS	1,2,3,4	-93	-93	-101	-90	-93		
I _o ^{Note3,4}	dBm/ 9.36 MHz	1,2, 3, 4	-61.01	-61.01	-65.44	-58.57	-61.01		
Q _{rxlevmin}	dBm/SCS	1,2, 3, 4	-	-	-140		-		
P _{compensation}	dB	1,2,3,4	-	-	0	0	-		
Q _{hysts}	dB	1,2,3,4	-	-	0	0	-		
Q _{offsets, n}	dB	1,2,3,4	-	-	0	0	-		
Cell_selection_and_ reselection_quality_measurement		1,2,3,4	RSRP and RSRQ						
T _{reselection}	s	1,2,3,4	-		0		-		
S _{nonintrasearchP}	dB	1,2,3,4	-		Not Sent		-		
S _{nonintrasearchQ}	dB	1,2,3,4	-		Not Sent		-		
Thresh _{x, high}	dB	1,2,3,4	-		48		-		
Thresh _{serving, low}	dB	1,2,3,4	-		44		-		
Thresh _{x, low}	dB	1,2,3,4	-		50		-		
Propagation Condition	dB	1,2,3,4	-		AWGN		-		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.									
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.									
Note 3: SSB_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.									
Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.									

Table A.6.6.15.1-5: General idle mode test parameters for Idle Mode measurements of inter-RAT DC candidate cells for early reporting

Parameter	Unit	Test configuration	Value	Comment
Serving cell		1, 2, 3, 4	Cell1	The UE camps on cell 1 which is the former PCell.
Neighbour cell		1, 2, 3, 4	Cell2	The UE shall perform inter-RAT measurements on cell 2 which is the former PSCell.
RF Channel Number		1, 2, 3, 4	1, 2	
Time offset between cells		1, 2, 3, 4	3 μ s	Synchronous cells
Access Barring Information	-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration		1, 2	SSB.1 FR1	Serving cell
		3, 4	SSB.2 FR1	Serving cell
SMTC configuration Serving cell		1, 2, 3, 4	SMTC.2	
DRX cycle length	s	1, 2, 3, 4	1.28	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3, 4	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3, 4	Not configured	
T3	s	1, 2, 3, 4	0.5	T3 needs to be defined so that cell measurement time is taken into account.
T4	s	1, 2, 3, 4	65	T4 needs to be defined so that cell measurement time is taken into account.

A.6.6.15.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During time durations T1 the UE shall start transmitting preamble on PSCell. During T2 the UE perform intra-frequency measurements on the PCell and the PSCell.

During the time-period T3 the connection is released, and UE enters idle mode. During the time period T3 and T4 the UE is camped in Idle mode and at T4 the signal level of cell 2 is changed. The UE shall not perform reselection. The UE shall perform Idle Mode CA measurement according to Section 4.4.

At the start of T5 the UE is paged for connection setup. During the connection setup the UE is requested to transmit early measurement report. The UE shall send early measurement report to the PCell including idle mode CA/DC measurement from cell 2.

After receiving the requested early measurement report, the test equipment verifies that the accuracy of measurement reported for serving Cell 1 and Cell 2 meets the requirements in Sections 10.1.2B and 10.1.7B and Sections 10.2.4 and 10.2.5, respectively and test ends.

A.6.6.16 PRS-RSRPP measurements

A.6.6.16.1 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR1 in RRC_CONNECTED state

A.6.6.16.1.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRPP measurement meets the delay requirements specified in clause 9.9.6.5 in an environment with two-tap channel.

The supported test configurations are specified in Table A.6.6.16.1.1-1.

Table A.6.6.16.1.11: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The test consists of two consecutive time intervals, with duration of T1 and T2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.6.16.1.1-2, and cell specific test parameters are listed in Table A.6.6.16.1.1-3.

Table A.6.6.16.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
BW _{channel}	MHz	1	20: N _{RB,c} = 106	
		2	20: N _{RB,c} = 106	
		3	50: N _{RB,c} = 133	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 ^{Note 1}	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	NA	OFF
Time offset between serving and neighbour cells	μs	1, 2, 3	3	Synchronous cells
Expected RSTD	μs	1, 2, 3	3	
Expected RSTD uncertainty	μs	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	5	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.16.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	
		2	PRS.1.4 FR1		PRS.1.4 FR1	
		3	PRS.2.4 FR1		PRS.2.4 FR1	
PRS muting info		1, 2, 3	‘10’		‘01’	
N_{oc} ^{Note 2}	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41	-Infinity	-12.12
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2	-Infinity	-10
		2				
		3				
PRS-RSRP ^{Note 3}	dBm/SCS kHz	1	-Infinity	-100	-Infinity	-108
		2	-Infinity	-100	-Infinity	-108
		3	-Infinity	-97	-Infinity	-105
SS-RSRP ^{Note 3}	dBm/SCS kHz	1	-88	-88	-Infinity	-88
		2	-88	-88	-Infinity	-88
		3	-85	-85	-Infinity	-85
Io	dBm/19.08 MHz	1	N/A	-64.57	N/A	-64.57
	dBm/19.08 MHz	2		-64.57		-64.57
	dBm/47.88 MHz	3		-60.59		-60.59
Propagation Condition		1, 2, 3	Two-tap channel defined in 38.101-4 Annex B.2.4, $a = 1$, $\tau_d = 0.45 \mu s$ and $f_D = 5 \text{ Hz}$			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						

Note 3:	SS-RSRP/PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
---------	--

A.6.6.16.1.2 Test Requirements

The UE shall perform and report the PRS-RSRPP measurements for Cell 1 and Cell 2, within the time limit specified in clause 9.9.6.5, starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.16.2 PRS-RSRPP reporting delay test case with reduced number of samples for single positioning frequency layer in FR1 in RRC_CONNECTED state

A.6.6.16.2.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRPP measurement meets the reduced sample measurement delay requirements specified in clause 9.9.6.5 in an environment with two-tap channel for reduced number of samples. In this test UE that supports *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED* is configured by LMF to perform PRS measurement with reduced number of samples.

The supported test configurations are specified in Table A.6.6.16.2.1-1.

Table A.6.6.16.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The test consists of two consecutive time intervals, with duration of T1 and T2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.6.16.2.1-2, and cell specific test parameters are listed in Table A.6.6.16.2.1-3.

Table A.6.6.16.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.

Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
BW _{channel}	MHz	1	20: N _{RB,c} = 106	
		2	20: N _{RB,c} = 106	
		3	50: N _{RB,c} = 133	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
Measurement gap		1, 2, 3	GP#24 or GP#0 ^{Note 1}	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	NA	OFF
Time offset between serving and neighbour cells	μs	1, 2, 3	3	Synchronous cells
Expected RSTD	μs	1, 2, 3	3	
Expected RSTD uncertainty	μs	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	5	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.16.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	
		2	PRS.1.4 FR1		PRS.1.4 FR1	
		3	PRS.2.4 FR1		PRS.2.4 FR1	
PRS muting info		1, 2, 3	‘10’		‘01’	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			

		3	-95			
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	0	-Infinity	-6
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	2.23	-Infinity	-1.73
		2				
		3				
PRS-RSRP ^{Note 3}	dBm/SCS kHz	1	-Infinity	-95.77	-Infinity	-99.73
		2	-Infinity	-95.77	-Infinity	-99.73
		3	-Infinity	-92.77	-Infinity	-96.73
SS-RSRP ^{Note 3}	dBm/SCS kHz	1	-100	-100	-Infinity	-104
		2	-100	-100	-Infinity	-104
		3	-97	-97	-Infinity	-101
Io	dBm/19.08 MHz	1	N/A	-61.71	N/A	-61.71
	dBm/19.08 MHz	2		-61.71		-61.71
	dBm/47.88 MHz	3		-57.73		-57.73
Propagation Condition		1, 2, 3	Two-tap channel defined in 38.101-4 Annex B.2.4, $a = 1$, $\tau_d = 0.45 \mu s$ and $f_D = 5 \text{ Hz}$			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP/PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.6.16.2.2 Test Requirements

The UE shall perform and report the PRS-RSRPP measurements for Cell 1 and Cell 2, within the time limit specified in clause 9.9.6.5, starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.16.3 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR1 in RRC_CONNECTED state without measurement gap

A.6.6.16.3.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRPP measurement meets the delay requirements specified in clause 9.9.6.6 in an environment with two-tap channel. Reporting delay test for gapless PRS measurement is conducted assuming that the PRS has higher priority, i.e., state 1, than all other DL signals/channels and is transmitted within active DL BWP of UE. Two sub-tests are defined, sub-test 1 is for $N_{sample} = 4$ and sub-test 2 is for reduced number of samples N_{sample} via *reducedDL-PRS-ProcessingSamples*. For sub-test 2 LMF indicates UE to perform PRS measurement with $N_{sample} = 1$. The cell specific parameters for sub-test 1 and sub-test 2 are defined in Table A.6.6.16.3.1-3.

The supported test configurations are specified in Table A.6.6.16.3.1-1.

Table A.6.6.16.3.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The test consists of two consecutive time intervals, with duration of T1 and T2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first PRS processing window instance containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The UE is configured with PPW before start of T2.

The general test parameters are listed in Table A.6.6.16.3.1-2, and cell specific test parameters are listed in Table A.6.6.16.3.1-3.

Table A.6.6.16.3.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
BW _{channel}	MHz	1	20: N _{RB,c} = 106	
		2	20: N _{RB,c} = 106	
		3	50: N _{RB,c} = 133	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
PPW configuration		1,2,3	PPW.1	As defined in A.3.33
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	NA	OFF
Time offset between serving and neighbour cells	μs	1, 2, 3	- set to the UE reported capability for receive time difference threshold if the UE reported value is < 3μs 3μs otherwise	Synchronous cells
Expected RSTD	μs	1, 2, 3	0	
Expected RSTD uncertainty	μs	1, 2, 3	Same as time offset	

T1	s	1, 2, 3	2	In this test UE is configured to measure single PFL within the configured PPW.
T2	ms	1, 2, 3	10	

Table A.6.6.16.3.1-3: Cell specific test parameters T2

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			Sub-test 1	Sub-test 2	Sub-test 1	Sub-test 2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	
		2	PRS.1.4 FR1		PRS.1.4 FR1	
		3	PRS.2.4 FR1		PRS.2.4 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
N_{oc} ^{Note 2}	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-2.41	0	-12.12	-6
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-2	2.23	-10	1.73
		2				
		3				
PRS-RSRP ^{Note 3}	dBm/SCS kHz	1	-100	-95.77	-108	-99.73
		2	-100	-95.77	-108	-99.73
		3	-97	-92.77	-105	-96.73
SS-RSRP ^{Note 3}	dBm/SCS kHz	1	-100	-100	-104	-104
		2	-100	-100	-104	-104
		3	-97	-97	-101	-101
Io	dBm/19.08 MHz	1	-64.57	-61.71	-64.57	-61.71

	dBm/19.08 MHz	2	-64.57	-61.71	-64.57	-61.71
	dBm/47.88 MHz	3	-60.59	-57.73	-60.59	-57.73
Propagation Condition		1, 2, 3	Two-tap channel defined in 38.101-4 Annex B.2.4, $a = 1$, $\tau_d = 0.45 \mu s$ and $f_D = 5 \text{ Hz}$			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP/PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.6.6.16.3.2 Test Requirements

The UE shall perform and report the PRS-RSRPP measurements for Cell 1 and Cell 2, within the time limit specified in clause 9.9.6.6, starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.6.17 SA event triggered reporting tests with Pre-MG

A.6.6.17.1 SA event triggered reporting tests with autonomous activation/deactivation Pre-MG

A.6.6.17.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3. And this test will also jointly verify Pre-configured measurement gap activation/deactivation delay in clause 8.19.2.

A.6.6.17.1.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.6.6.17.1.2-1 and A.6.6.17.1.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively.

During the duration of T1,

- UE is configured with 2 different UE-specific bandwidth parts for Cell 1 (PCell), BWP-1 and BWP-2, before starting the test.
- BWP-1 includes bandwidth of the initial DL BWP and SSB. UE is expected to deactivate the Pre-MG when this BWP is active.

- BWP-2 does not include bandwidth of the initial DL BWP and SSB. UE is expected to activate the Pre-MG when this BWP is active.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell.

- At the start of time duration T2, the serving gNB can trigger Pre-MG activation starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted i. The UE shall switch its bandwidth part from BWP-1 to BWP-2. And UE is expected to complete the Pre-MG activation within T2.
- At the start of time duration T3, the UE may not have any timing information of neighbor cell to be measured (e.g. cell 2). And UE was expected to complete the measurements of SSBs with the activated Pre-MG within T3.

There are two BWPs configured in Cell 1, BWP-1 which contains the cell defining SSB, and BWP-2 which does not contain any SSB of Cell 1.

Table A.6.6.17.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.17.1.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
Measurement gap type		1, 2, 3	Per-UE gaps	
Measurement gap repetition periodicity	ms	1, 2, 3	40	
Measurement gap length	ms	1, 2, 3	6	
Measurement gap offset	ms	1, 2, 3	39	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTTC configuration		1	SMTTC.2	
		2	SMTTC.1	
		3	SMTTC.1	
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX	ms	1, 2, 3		OFF

Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
T1	s	1, 2, 3	0.1	
T2	s	1, 2, 3	0.2	
T3	s	1,2, 3	5	
<i>bwp-InactivityTimer</i>	ms		500	

Table A.6.6.17.1.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
Intial BWP configuration		1,2,3	DLBWP.0.1 ULBWP.0.1			DLBWP.0.1 ULBWP.0.1		
BWP-1 Configuration		1,2,3	DLBWP.1.3 ULBWP.1.3			N/A		
BWP-2 Configuration		1,2,3	DLBWP.1.2 ULBWP.1.2			N/A		
PDSCH RMC configuration		1	SR.1.1 FDD			N/A		
		2	SR.1.1 TDD					
		3	SR.2.1 TDD					
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD			CCR.1.1 FDD		
		2	CCR.1.2 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Patterns		1, 2, 3	OP.1			OP.1		
TRS configuration		1	TRS.1.1 FDD			N/A		
		2	TRS.1.1 TDD			N/A		
		3	TRS.1.2 TDD			N/A		
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1			DLBWP.0.1 ULBWP.0.1		
Active DL BWP configuration		1, 2, 3	DLBWP.1.2			DLBWP.1.1		
Active UL BWP configuration		1, 2, 3	ULBWP.1.2			ULBWP.1.1		
RLM-RS		1, 2, 3	CSI-RS			SSB		
N_{oc} Note 2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note 2	dBm/15 kHz	1	-98					
		2						
		3						

$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP ^{Note 3}	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.6.17.1.3 Test Requirements

During T1 the UE shall report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions, starting from the 1st complete Pre-MG occasion after the beginning of PCell's DL slot ($i + T_{BWPswitchDelay}$) + 5ms as defined in clause 8.19.2.

During T3, the UE shall NOT be able to receive PDSCH and report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800ms from the beginning of time period T3.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.17.2 SA event triggered reporting tests with pre-configured measurement gaps and network-controlled activation/deactivation

A.6.6.17.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE correctly activates and deactivates the pre-MG and makes correct measurement and reporting of an event with activated and deactivated pre-MG. This test will partly verify the pre-MG activation and deactivation delay requirements in clause 8.19.2 and the intra-frequency cell search requirements in clause 9.2.6.2 and 9.3.4.

A.6.6.17.2.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The supported test configurations are listed in Table A.6.6.17.2.2-1, general test parameters are listed in Table A.6.6.17.2.2-2, and cell specific test parameters are listed in Table A.6.6.17.2.2-3.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. A pre-MG is configured before the test.

The UE is configured with 2 dedicated BWPs, BWP-1 and BWP-2. BWP-1 includes bandwidth of the SSB, and *preConfGapStatus* for BWP-1 is set to '0'; BWP-2 does not include bandwidth of the SSB, and *preConfGapStatus* for BWP-2 is set to '1'.

The test consists of 3 successive time periods, with time duration of T1, T2, and T3 respectively. Before the test starts, UE is switched to BWP-1.

The time period T2 starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2 and complete pre-MG activation during T2.

During T3, UE shall perform intra-frequency measurement with pre-MG activated.

During time duration T1 and T2, the UE shall not have any timing information of Cell 2.

Table A.6.6.17.2.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.17.2.2-2: General test parameters for SA intra-frequency event triggered reporting with pre-configured measurement gaps and network-controlled activation/deactivation

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
Measurement gap type		1, 2, 3	Per-UE gaps	
Measurement gap repetition periodicity	ms	1, 2, 3	40	
Measurement gap length	ms	1, 2, 3	6	
Measurement gap offset	ms	1, 2, 3	39	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3	-4.5	

CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX	ms	1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
T1	s	1, 2, 3	0.1	
T2	s	1, 2, 3	0.1	
T3	s	1, 2, 3	5	

Table A.6.6.17.2.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with with pre-configured measurement gaps and network-controlled activation/deactivation

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1	SR.1.1 FDD			N/A		
		2	SR.1.1 TDD					
		3	SR.2.1 TDD					
RMSI CORESET RMC configuration		1	CR.1.1 FDD			N/A		
		2	CR.1.1 TDD			N/A		
		3	CR.2.1 TDD			N/A		
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD			N/A		
		2	CCR.1.2 TDD			N/A		
		3	CCR.2.1 TDD			N/A		
OCNG Patterns		1, 2, 3	OP.1			OP.1		
TRS configuration		1	TRS.1.1 FDD			N/A		
		2	TRS.1.1 TDD			N/A		
		3	TRS.1.2 TDD			N/A		
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1			N/A		
Active DL BWP configuration for BWP-1		1, 2, 3	DLBWP.1.3			N/A		
Active UL BWP configuration for BWP-1		1, 2, 3	ULBWP.1.3			N/A		
Active DL BWP configuration for BWP-2		1, 2, 3	DLBWP.1.2			N/A		

Active UL BWP configuration for BWP-2		1, 2, 3	ULBWP.1.2			N/A		
RLM-RS		1, 2, 3	CSI-RS			N/A		
N_{oc} Note 2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
N_{oc} Note 2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s/I_{ot}$	dB	1,2,3	4	4	-1.46	-Infinity	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1,2,3	4	4	4	-Infinity	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1,2	-94	-94	-94	-Infinity	-Infinity	-94
		3	-91	-91	-91	-Infinity	-Infinity	-91
Io	dBm/9.36 MHz	1,2	-64.60	-64.60	-62.25	-64.60	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-58.50	-56.16	-58.50	-58.50	-56.16
Propagation Condition		1, 2, 3	AWGN					
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2 and T4.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.6.6.17.2.3 Test Requirements

During T1, UE shall report corresponding HARQ-ACK/NACK for those PDSCHs scheduled in the slots overlapped with the pre-MG occasions.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T3. During T3, UE is not required to report corresponding HARQ-ACK/NACK for those PDSCHs scheduled in the slots overlapped with the pre-MG occasions.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.6.6.17.3 Void

A.6.6.17.3.1 Void

A.6.6.17.3.2 Void

A.6.6.17.3.3 Void

A.6.6.18 SA event triggered reporting tests with concurrent gaps

A.6.6.18.1 SA event triggered reporting tests for FR1 concurrent gaps with non-overlapping scenario for SSB-based measurements in both inter-frequency layers

A.6.6.18.1.1 Test Purpose and Environment

The purpose of this test is to verify that the concurrent gaps capable UE makes correct reporting of events. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 as neighbour cell in FR1 on NR RF channel 2, and NR cell 3 as neighbour cell in FR1 on NR RF channel 3. The test parameters are given in Tables A.6.6.18.1.1-1, A.6.6.18.1.1-2 and A.6.6.18.1.1-3.

Two measurement gap patterns (MeasGapId #1 and MeasGapId #2) are configured with the gap pattern ID #0 and #1 as defined in Table A.6.6.18.1.1-2. MeasGapId #2 is configured with a higher priority than MeasGapId #1. MeasGapId #1 and MeasGapId #2 are associated with the MOs for RF channel numbers #2 and #3, respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used for both frequency layers. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3.

Table A.6.6.18.1.1-1: SA event triggered reporting tests for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: Target NR cells have the same SCS, BW and duplex mode as NR serving cells	

Table A.6.6.18.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 concurrent gaps with fully non-overlapping scenario for SSB-based measurements in both inter-frequency layers

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2, 3	Three FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cells 2 and 3	NR cell 2 is on NR RF channel number 2. NR cell 3 is on NR RF channel number 3.
Gap Pattern Id		Config 1,2,3	0 for MeasGapId #1 1 for MeasGapId #2	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39 for MeasGapId #1 19 for MeasGapId #2	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used

Time offset between serving and neighbour cell 1		Config 1, 2, 3	3μs	Synchronous.
Time offset between serving and neighbour cell 2		Config 1, 2, 3	5ms	Asynchronous. The timing of Cell 3 is 5ms later than the timing of Cell 1.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1.5	1.5

Table A.6.6.18.1.1-13: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 concurrent gaps with fully non-overlapping scenario for SSB-based measurements in both inter-frequency layers

Parameter		Unit	Test configuration n	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD					
			Config 2,3	TDD					
TDD configuration			Config 1	Not Applicable					
			Config 2	TDDConf.1.1					
			Config 3	TDDConf.2.1					
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52					
			Config 3	40: N _{RB,c} = 106					
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52					
			Config 3	40: N _{RB,c} = 106					
BWP configuration n	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1	NA		NA		
	Initial UL BWP			ULBWP.0.1	NA		NA		
	Dedicated DL BWP			DLBWP.1.1	NA		NA		
	Dedicated UL BWP			ULBWP.1.1	NA		NA		
TRS configuration			Config 1	TRS.1.1 FDD	NA		NA		
			Config 2	TRS.1.1 TDD	NA		NA		
			Config 3	TRS.1.2 TDD	NA		NA		
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1		OP.1		
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD					
			Config 2	SR.1.1 TDD					
			Config 3	SR.2.1 TDD					
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD					
			Config 2	CR.1.1 TDD					
			Config 3	CR.2.1 TDD					
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD					
			Config 2	CCR.1.1 TDD					
			Config 3	CCR.2.1 TDD					
SSB parameters			Config 1,2,3	SSB.1 FR1	SSB.1 FR1		SSB.1 FR1		
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.2	SMTC.2		SMTC.2		
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15					
			Config 3	30					
EPRE ratio of PSS to SSS			Config 1,2,3	0	0		0		

EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH DMRS							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} ^{Note2}	dBm/15k Hz		-98	-98	-98	-98	-98
N_{oc} ^{Note2}	dBm/SCS	Config 1,2	-98	-98	-98	-98	-98
		Config 3	-95	-95	-95	-95	-95
SS-RSRP ^{Note 3}	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91	-Infinity
		Config 3	-91	-91	-Infinity	-88	-Infinity
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7	-Infinity
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7	-Infinity
I_o ^{Note3}	dBm/9.36 MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26	-70.05
	dBm/38.1 6MHz	Config 3	-58.49	-58.49	-63.94	-56.15	-63.94
Propagation Condition		Config 1,2,3	AWGN	AWGN	AWGN	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							

A.6.6.18.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report for each neighboring cell, with a measurement reporting delay less than 920 ms for cell 2 and 1280ms for cell 3 from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.18.2 SA event triggered reporting tests for FR1 concurrent gap with partially partial overalpping scenario for SSB-based measurements in both inter-frequency layers

A.6.6.18.2.1 Test Purpose and Environment

The purpose of this test is to verify that the concurrent gap capable UE makes correct reporting of events. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 as neighbour cell in FR1 on NR RF channel 2, and NR cell 3 as neighbour cell in FR1 on NR RF channel 3. The test parameters are given in Tables A.6.6.18.2.1-1, A.6.6.18.2.1-2 and A.6.6.18.2.1-3. The TE schedules continuous DL data on PCell throughout the test.

Two measurement gap patterns (MeasGapId #1 and MeasGapId #2) are configured with the gap pattern ID #0 and #1 as defined in Table A.6.6.18.2.1-2. MeasGapId #2 is configured with a higher priority than MeasGapId #1. MeasGapId #1 and MeasGapId #2 are associated with the MOs for RF channel numbers #2 and #3, respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used for both frequency layers. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3.

Table A.6.6.18.2.1-1: SA event triggered reporting tests for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: Target NR cells have the same SCS, BW and duplex mode as NR serving cells	

Table A.6.6.18.2.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 concurrent gap with partially partial overalpping scenario for SSB-based measurements in both inter-frequency layers

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2, 3	Three FR1 NR carrier frequencies are used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cells 2 and 3	NR cell 2 is on NR RF channel number 2. NR cell 3 is on NR RF channel number 3.
Gap Pattern Id		Config 1,2,3	0 for MeasGapId #1 1 for MeasGapId #2	As specified in clause 9.1.2-1.
Measurement gap offset	ms	Config 1,2,3	39 for MeasGapId #1 4 for MeasGapId #2	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used

Time offset between serving and neighbour cell 1		Config 1, 2, 3	3 μ s	Synchronous.
Time offset between serving and neighbour cell 2		Config 1, 2, 3	5ms	Asynchronous. The timing of Cell 3 is 5ms later than the timing of Cell 1.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1.5	1.5

Table A.6.6.18.2.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 concurrent gap with partially-partial overlapping scenario for SSB-based measurements in both inter-frequency layers

Parameter		Unit	Test configuration n	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD					
			Config 2,3	TDD					
TDD configuration			Config 1	Not Applicable					
			Config 2	TDDConf.1.1					
			Config 3	TDDConf.2.1					
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52					
			Config 3	40: N _{RB,c} = 106					
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52					
			Config 3	40: N _{RB,c} = 106					
BWP configuration n	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1	NA		NA		
	Initial UL BWP			ULBWP.0.1	NA		NA		
	Dedicated DL BWP			DLBWP.1.1	NA		NA		
	Dedicated UL BWP			ULBWP.1.1	NA		NA		
TRS configuration			Config 1	TRS.1.1 FDD	NA		NA		
			Config 2	TRS.1.1 TDD	NA		NA		
			Config 3	TRS.1.2 TDD	NA		NA		
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1		OP.1		
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD					
			Config 2	SR.1.1 TDD					
			Config 3	SR.2.1 TDD					
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD					
			Config 2	CR.1.1 TDD					
			Config 3	CR.2.1 TDD					
Dedicated CORESET Reference Channel			Config 1	CCR.1.1 FDD					
			Config 2	CCR.1.1 TDD					
			Config 3	CCR.2.1 TDD					
SSB parameters			Config 1,2,3	SSB.1 FR1	SSB.1 FR1		SSB.1 FR1		
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.2	SMTC.2		SMTC.7		
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15					
			Config 3	30					
EPRE ratio of PSS to SSS			Config 1,2,3	0	0		0		

EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} ^{Note2}	dBm/15k Hz		-98		-98		-98	
N_{oc} ^{Note2}	dBm/SCS	Config 1,2	-98		-98		-98	
		Config 3	-95		-95		-95	
SS-RSRP ^{Note 3}	dBm/SCS	Config 1,2	-94	-94	-Infinity	-91	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7	-Infinity	7
I_o ^{Note3}	dBm/9.36 MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26	-70.05	-62.26
	dBm/38.1 6MHz	Config 3	-58.49	-58.49	-63.94	-56.15	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.								

A.6.6.18.2.2 Test Requirements

The UE shall send one Event A3 triggered measurement report for each neighboring cell, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.18.3 SA NR - E-UTRAN and NR FR1 concurrent event-triggered reporting in non-DRX in FR1

A.6.6.18.3.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE makes correct event-triggered reporting of concurrent inter-RAT E-UTRAN and NR FR1 measurements when operating in standalone (SA) operation with PCell in FR1. This test shall partly verify the cell search and measurement requirements in Clauses 9.4.2, 9.4.3, 9.3.4 and 9.3.5.

In each test there are three cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the NR PCell, Cell 2 is an Inter-frequency NR FR1 neighbour cell on NR RF channel 2 and Cell 3 is an inter-RAT E-UTRAN neighbour cell on LTE RF channel 3.

In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used for the E-UTRAN cell (cell 3). In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used for the NR FR1 cell (cell 2).

Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2 and Cell 3.

In the test two concurrent per-UE measurement gap pattern configurations # 0 as defined in Table A.6.6.18.3.1-2 are provided for a UE. Two measurement gap patterns (MeasGapId #1 and MeasGapId #2) are configured with the gap pattern ID #1 as defined in Table A.6.6.18.3.1-2. MeasGapId #2 is configured with a higher priority than MeasGapId #1. MeasGapId #1 and MeasGapId #2 are associated with the MOs for NR RF channel numbers #2 and LTE RF channel #3, respectively.

Supported test configurations are shown in table A.6.6.18.3.1-1. General test parameters are provided in Table A.6.6.18.3.1-2 below. Test parameters for Cell 1, Cell 2 and Cell 3, valid for both time duration T1 and T2, are provided in Tables A.6.6.18.3.1-3 and A.6.6.18.3.1-4, respectively.

The test parameters and configurations are given in Tables A.6.6.18.3.1-1, A.6.6.18.3.1-2, and A.6.6.18.3.1-3.

Table A.6.6.18.3.1-1: Supported test configurations in SA concurrent inter-RAT E-UTRAN and NR FR1 inter-frequency event triggered reporting in non-DRX with PCell in FR1

Configuration	Description	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE: FDD. NR: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE: FDD. NR: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE: FDD. NR: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE: TDD. NR: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE: TDD. NR: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE: TDD. NR: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.6.6.18.3.1-2: General test parameters for SA concurrent inter-RAT E-UTRAN and NR FR1 inter-frequency event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		1 - 6	1, 2	2 NR carrier frequency is used in the test.
LTE RF Channel Number			3	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	1 - 6	As specified in Tables A.6.6.18.3.1-3 and A.6.6.18.3.1-4.	
Active cell		1 - 6	NR Cell 1 (PCell in FR1)	Cell 1 is on NR RF channel number 1
Neighbour cell 1		1 - 6	Cell 2 (NR FR1)	Cell 2 is on NR RF channel number 2
Neighbour cell 2		1 - 6	Cell 3 (LTE)	Cell 3 is on LTE RF channel number 3
Gap Pattern Id		1 - 6	1 for MeasGapId #1 1 for MeasGapId #2	As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
Measurement gap offset	ms	1 – 6	19 for MeasGapId #1 39 for MeasGapId #2	
NR measurement quantity			SS-RSRP	Measurement quantity for Cell 1 and Cell 2
Inter-RAT E-UTRAN measurement quantity			RSRP	Measurement quantity for Cell 3
b2-Threshold1	dBm		As specified in Table A.6.6.18.3.1-3	SS-RSRP threshold for SS-RSRP measurement on Cell 1 for event B2
b2-Threshold2EUTRA	dBm		-101	E-UTRAN RSRP threshold for SS-RSRP measurement on Cell 3 for event B2
Hysteresis	dB	1 – 6	0	
TimeToTrigger	s	1 – 6	0	
Filter coefficient		1 – 6	0	L3 filtering is not used
offsetMO	dB	1 - 6	6	NR Cell 2
a4-Threshold	dBm	1 – 6	-105	NR Cell 2
DRX			OFF	N.A
Time offset between serving and neighbour cells		1, 4	3ms	Asynchronous cells NR cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3µs	Synchronous NR cells.
T1	s	1 – 6	5	for LTE Cell 3 and NR FR1 Cell 2
T2	s	1 - 6	5	for LTE Cell 3
			10.3 for PC1 and PC5; 6.5 for other PC	for NR FR1 Cell 2

Table A.6.6.18.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1	Cell 2
-----------	------	--------------------	--------	--------

				T1	T2	T1	T2
NR RF Channel Number			Config 1-6	1		2	
Duplex mode			Config 1, 4	FDD		FDD	
			Config 2, 3, 5, 6	TDD		TDD	
TDD configuration			Config 1, 4	Not Applicable		Not Applicable	
			Config 2, 5	TDDConf.1.1		TDDConf.1.1	
			Config 3, 6	TDDConf.2.1		TDDConf.2.1	
BW _{channel}		MHz	Config 1, 4	10: N _{RB,c} = 52		10: N _{RB,c} = 52	
			Config 2, 5	10: N _{RB,c} = 52		10: N _{RB,c} = 52	
			Config 3, 6	40: N _{RB,c} = 106		40: N _{RB,c} = 106	
			Config 1-6	DLBWP.0.1		N/A	
BWP configuration	Initial DL BWP			ULBWP.0.1		N/A	
	Initial UL BWP			DLBWP.1.1		N/A	
	Dedicated DL BWP			ULBWP.1.1		N/A	
	Dedicated UL BWP						
CSI-RS for tracking parameters on NR RF Channel 1			Config 1, 4	TRS.1.1 FDD			
			Config 2, 5	TRS.1.1 TDD			
			Config 3, 6	TRS.1.2 TDD			
OCNG Patterns			Config 1-6	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1, 4	SR.1.1 FDD		-	
			Config 2, 5	SR.1.1 TDD			
			Config 3, 6	SR.2.1 TDD			
RMSI CORESET Reference Channel			Config 1, 4	CR.1.1 FDD		-	
			Config 2, 5	CR.1.1 TDD			
			Config 3, 6	CR.2.1 TDD			
Dedicated CORESET RMC configuration			Config 1, 4	CCR.1.1 FDD		-	
			Config 2, 5	CCR.1.1 TDD			
			Config 3, 6	CCR.2.1 TDD			
SMTC configuration			Config 1, 4	SMTC.2		SMTC.2	
			Config 2, 3, 5, 6	SMTC.1		SMTC.1	
SSB configuration			Config 1, 4	SSB.1 FR1		SSB.1 FR1	
			Config 2, 5	SSB.1 FR1		SSB.1 FR1	
			Config 3, 6	SSB.2 FR1		SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1, 2, 4, 5	15		15	
			Config 3, 6	30		30	
b2-Threshold1		dBm	Config 1, 2, 4, 5	-81		-	
			Config 3, 6	-78		-	
EPRE ratio of PSS to SSS			Config 1-6	0	0		
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							

EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} ^{note2}	dBm/15 KHz	1-6	-98		
N_{oc} ^{note2}	dBm/S CS	Config 1, 2, 4, 5	-98		
		Config 3, 6	-95		
$\hat{E}_s/N_{oc}$	dB	Config 1 - 6	4	-Infinity	4
$\hat{E}_s/I_{ot}$ ^{note3}	dB	Config 1 - 6	4	-Infinity	4
SSB_RP ^{note3}	dBm/S CS	Config 1, 2, 4, 5	-94	-Infinity	-94
		Config 3, 6	-91	-Infinity	-91
I_o ^{note3}	dBm/9.36 MHz	Config 1, 2, 4, 5	-64.59	-70.05	-64.59
	dBm/38.16 MHz	Config 3, 6	-58.49	-63.94	-58.49
Propagation condition		Config 1 - 6	AWGN		
Antenna Configuration and Correlation Matrix		Config 1 - 6	1x2		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SS B_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5: Void					
Note 6: Void					
Note 7: Void					
Note 8: Void					

Table A.6.6.18.3.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 3	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	3	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	

PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}				
Ê _s /N _{oc}	dB	1, 2, 3, 4, 5, 6	-Infinity	17
Ê _s /I _{ot} ^{Note5}	dB	1, 2, 3, 4, 5, 6	-Infinity	17
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
I _o ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6	-76.22+10log (N _{RB,c} /50)	-59.13+10log (N _{RB,c} /50)
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5: Ê _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.6.18.3.2 Test Requirements

In this test with per-UE gap, the UE shall send one Event A4 triggered measurement report for Cell 2, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

10240 for UE supporting power class 1 and 5, or

6400 for UE supporting other power class.

The UE shall send one Event B2 triggered measurement report for Cell 3 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2.

The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.18.4 SA event triggered reporting tests for PRS and SSB measurement in FR1 without SSB time index detection when DRX is not used

A.6.6.18.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA NR measurements with concurrent gaps requirements in clause 9.2.6 (when one of concurrent gaps in same frequency layer of serving cells), 9.3.6 (when one of concurrent gaps in the different frequency layer of serving cells) and 9.9.2 (when one of concurrent gaps used for PRS measurement).

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 as neighbour cell in FR1 on NR RF channel 2 and NR cell 3 as neighbor cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.6.6.18.4.1-1, A.6.6.18.4.1-2 and A.6.6.18.4.1-3.

Two measurement gap patterns (MeasGapId #1 and MeasGapId #2) are configured with the gap pattern ID #0 and #24 as defined in Table A.6.6.18.4.1-2. MeasGapId #2 is configured with a higher priority than MeasGapId #1. MeasGapId #1 and MeasGapId #2 are associated with the MOs for RF channel numbers #1 and #2, respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3. Cell 1 and cell 3 transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance of MeasGapId #2 containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

Table A.6.6.18.4.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.18.4.1-2: General test parameters for SA inter-frequency event triggered reporting for concurrent gaps with partially partial overlapping scenario for SSB-based measurements and PRS measurement

Parameter	Unit	Test configuration	Value	Comment
-----------	------	--------------------	-------	---------

NR RF Channel Number		1,2,3	1: Cell 1 and Cell 3 2: Cell 2	Two FR1 carrier frequencies are used for the NR cells.
Active cell		1,2,3	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1,2,3	NR cell 2, NR cell 3	Cell 2 is an inter-frequency cell neighbor cell Cell 3 is an intra-frequency neighbour cell in the positioning assistance data.
Gap Pattern Id		1,2,3	0 for MeasGapId #1 24 for MeasGapId #2	
Measurement gap offset	ms	1,2,3	7 for MeasGapId #1 11 for MeasGapId #2	
A3-Offset	dB	1, 2, 3	-9	
Hysteresis	dB	1, 2, 3	0	
DRX		1, 2, 3	NA	OFF
Time offset between serving and neighbour cells	μs	1, 2, 3	3	Synchronous cells
Expected RSTD	μs	1, 2, 3	3	
Expected RSTD uncertainty	μs	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	5	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

Table A.6.6.18.4.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 concurrent gap with partially-partial overlapping scenario for SSB-based measurements and PRS measurement

Parameter		Unit	Test configuration n	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
TDD configuration			1	N/A		N/A		N/A	
			2	TDDConf.1.1		TDDConf.1.1		TDDConf.1.1	
			3	TDDConf.2.1		TDDConf.2.1		TDDConf.2.1	
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52		10: N _{RB,c} = 52		10: N _{RB,c} = 52	
			3	40: N _{RB,c} = 106		40: N _{RB,c} = 106		40: N _{RB,c} = 106	
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52		10: N _{RB,c} = 52		10: N _{RB,c} = 52	
			3	40: N _{RB,c} = 106		40: N _{RB,c} = 106		40: N _{RB,c} = 106	
BWP configuration n	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A		N/A	
	Initial UL BWP			ULBWP.0.1		N/A		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1		OP.1	
PDSCH RMC configuration			1	SR.1.1 FDD		N/A		N/A	
			2	SR.1.1 TDD					
			3	SR.2.1 TDD					
RMSI CORESET RMC configuration			1	CR.1.1 FDD		N/A		N/A	
			2	CR.1.1 TDD		N/A		N/A	
			3	CR.2.1 TDD		N/A		N/A	
Dedicated CORESET RMC configuration			1	CCR.1.1 FDD		N/A		N/A	
			2	CCR.1.1 TDD		N/A		N/A	

SSB parameters		3	CCR.2.1 TDD		N/A		N/A	
		1	SSB.1 FR1		SSB.1 FR1		SSB.1 FR1	
		2	SSB.1 FR1		SSB.1 FR1		SSB.1 FR1	
		3	SSB.2 FR1		SSB.2 FR1		SSB.2 FR1	
SMTC configuration defined in A.3.11		1	SMTC.2		SMTC.2		SMTC.2	
		2	SMTC.1		SMTC.1		SMTC.1	
		3	SMTC.1		SMTC.1		SMTC.1	
TRS Configuration		1	TRS.1.1 FDD		N/A		N/A	
		2	TRS.1.1 TDD		N/A		N/A	
		3	TRS.1.2 TDD		N/A		N/A	
PRS configuration		1	PRS.1.4 FR1		N/A		PRS.1.4 FR1	
		2	PRS.1.4 FR1		N/A		PRS.1.4 FR1	
		3	PRS.2.4 FR1		N/A		PRS.2.4 FR1	
PRS muting configuration		1, 2, 3	'10'		'01'		'01'	
PDSCH/PDCCH subcarrier spacing	KHz	1, 2	15					
		3	30					
N_{oc} ^{Note2}	dBm/15 kHz Note5	1	-98		-98		-98	
		2	-98		-98		-98	
		3	-98		-98		-98	
N_{oc} ^{Note2}	dBm/SC S Note4	1	-98		-98		-98	
		2	-98		-98		-98	
		3	-95		-95		-95	
SS-RSRP ^{Note 3}	dBm/SC S Note5	1	-94	-94	-Infinity	-94	N/A	N/A
		2	-94	-94	-Infinity	-94	N/A	N/A
		3	-91	-91	-Infinity	-94	N/A	N/A
PRS-RSRP ^{Note 3}	dBm/SC S Note5	1	-	-101	N/A	N/A	-Infinity	-108
		2	-	-101	N/A	N/A	-Infinity	-108
		3	-	-98	N/A	N/A	-Infinity	-105
PRS $\hat{E}_s/I_{ot}$	dB	1,2,3	-	-3	N/A	N/A	-Infinity	-10
PRS $\hat{E}_s/N_{oc}$	dB	1,2,3	-	-3	N/A	N/A	-Infinity	-10
I_o ^{Note3}	dBm/9.3 6 MHz	1	-64.59		-70.05	-64.59	-64.59	
	dBm/9.3 6 MHz	2	-64.59		-70.05	-64.59	-64.59	
	dBm/38. 16 MHz	3	-58.49		-63.94	-58.49	-58.49	
Propagation Condition		1,2,3	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SS-RSRP/PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. The I_o values are derived without considering PRS-RSRP.							
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 5:	Void							
Note 6:	Void							
Note 7:	Void							

A.6.6.18.4.2 Test Requirements

The UE shall send one Event A3 triggered measurement report for cell 2, with a measurement reporting delay less than 1840ms from the beginning of time period T2.

The PRS RSRP measurement time fulfils the requirements specified in Clause 9.9.3.5. The UE shall perform and report the PRS RSRP measurements for Cell 3 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 9.9.3.5 starting from the beginning of time interval T2.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRP measurement for each correct event shall be within the PRS RSRP reporting range specified in Clause 10.1.24.3, i.e., between PRS RSRP_0 and PRS RSRP_126.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

IUE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.19 SA event triggered reporting tests with NCSG

A.6.6.19.1 SA event triggered reporting tests with NCSG under non-DRX in FR1

A.6.6.19.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2.7.1 and 9.2.7.2, and also verify the scheduling availability during intra-frequency measurement with NCSG in clause 9.2.7.3.

The serving frequency should be selected for which UE reports ‘ncsg’.

A.6.6.19.1.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.6.6.19.1.2-1, A.6.6.19.1.2-2 and A.6.6.19.1.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

During T2, the UE is continuously scheduled with data on the PCell.

The UE is capable of NCSG and report ‘ncsg’ through *NeedForGapNCSG-InfoNR* for PCell.

NCSG pattern configuration # 0 as defined in Table A.6.6.19.1.2-2 is provided for UE regardless of UE capable or incapable of supporting per-FR NCSG.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.6.6.19.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.19.1.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Test 1				
Active cell		1, 2, 3	Cell 1	
Neighbour cell		1, 2, 3	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
NCSG type		1, 2, 3	Per-UE	Per-UE NCSG patter is configured.
NCSG pattern		1, 2, 3	0	
Visible interruption repetition periodicity	ms	1, 2, 3	40	
Measurement length	ms	1, 2, 3	5	
NCSG offset	ms	1, 2, 3	39	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CSI-RS parameters		1	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX	ms	1, 2, 3		OFF
Time offset between serving and neighbour cells		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	1	

Table A.6.6.19.1.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with NCSG for PCell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			

		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2, 3	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-56.16	--58.50	-56.16
Propagation Condition		1, 2, 3	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.6.19.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

During T2, UE shall send HARQ ACK/NACK for the corresponding PDSCH scheduled in PCell in all the slots except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.19.2 SA event triggered reporting tests for FR1 with NCSG for inter-frequency measurement

A.6.6.19.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.10.

The serving frequency and the target frequency should be selected such that UE reports 'ncsg' for the target frequency given the serving frequency.

A.6.6.19.2.2 Test parameters

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. NR RF channel 1 and NR RF channel 2 should be selected such that UE reports 'ncsg' for the target frequency on NR RF channel 2.

The test parameters are given in Tables A.6.6.19.2.2-1, A.6.6.19.2.2-2 and A.6.6.19.2.2-3.

NCSG pattern configuration # 0 as defined in Table A.6.6.19.2.2-2 is provided for UE regardless of UE capable or incapable of supporting per-FR NCSG.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

During T2, the UE is continuously scheduled with data on the PCell.

Table A.6.6.19.2.2-1: SA event triggered reporting tests for FR1 with NCSG for inter-frequency measurement

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.6.6.19.2.2-2: General test parameters for event triggered reporting for FR1 with NCSG for inter-frequency measurement

Parameter	Unit	Test configuration	Value	Comment
			Test 1	

NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell2	NR cell 2 is on NR RF channel number 2.
NCSG Pattern Id		Config 1,2,3	0	As specified in Table 9.1.9.3-1.
NCSG offset		Config 1,2,3	9	
SMT-C-SSB parameters		Config 1	SSB.1 FR1	As specified in clause A.3.10.1
		Config 2	SSB.1 FR1	As specified in clause A.3.10.1
		Config 3	SSB.2 FR1	As specified in clause A.3.10.1
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1	

Table A.6.6.19.2.2-3: Cell specific test parameters for SA event triggered reporting for FR1 with NCSG for inter-frequency measurement

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2	10: N _{RB,C} = 52			
			Config 3	40: N _{RB,C} = 106			
BWP BW		MHz	Config 1,2	10: N _{RB,C} = 52			
			Config 3	40: N _{RB,C} = 106			
BWP configuration	Initial DL BWP		Config 1, 2, 3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	

		Config 2	TRS.1.1 TDD	NA		
		Config 3	TRS.1.2 TDD	NA		
OCNG Patterns		Config 1,2,3	OP.1	OP.1		
PDSCH Reference measurement channel		Config 1	SR.1.1 FDD			
		Config 2	SR.1.1 TDD			
		Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel		Config 1	CR.1.1 FDD			
		Config 2	CR.1.1 TDD			
		Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel		Config 1	CCR.1.1 FDD			
		Config 2	CCR.1.1 TDD			
		Config 3	CCR.2.1 TDD			
SSB parameters		Config 1	SSB.1 FR1	SSB.5 FR1		
		Config 2	SSB.1 FR1	SSB.5 FR1		
		Config 3	SSB.2 FR1	SSB.6 FR1		
SMTC configuration defined in A.3.11		Config 1	SMTC.2	SMTC.5		
		Config 2, 3	SMTC.1	SMTC.4		
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3	0	0		
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz		-98	-98		
N_{oc} ^{Note2}	dBm/S CS	Config 1,2	-98	-98		
		Config 3	-95	-95		
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.6.6.19.2.3 Test Requirements

In test 1 and 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

During T2, UE shall send HARQ-ACK/NACK for the corresponding PDSCH scheduled in PCell in all the slots except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern.

The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.19.3 SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1 with NCSG

A.6.6.19.3.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements based on NCSG when operating in standalone (SA) operation with PCell in FR1. This test shall partly verify the cell search and measurement requirements in Clauses 9.4.2 and 9.4.3.

The serving frequency and the target frequency should be selected such that UE reports 'ncsg' for the target frequency given the serving frequency.

A.6.6.19.3.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

Supported test configurations are shown in table A.6.6.19.3.2-1. General test parameters are provided in Table A.6.6.19.3.2-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.6.6.19.3.2-3 and A.6.6.19.3.2-4, respectively.

Table A.6.6.19.3.2-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD

2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.6.19.3.2-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		1	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.6.6.3.1.1-2 and A.6.6.3.1.1-3.	
Active cell		Cell 1	Cell 1 is on NR RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on LTE RF channel number 2
NCSG Pattern Id		0	As specified in clause Table 9.1.9.3-1.
NCSG offset	ms	39	
NCSG mgta	ms	0	
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	As specified in Table A.6.3.1.4-3	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	5	
Note 1: Values are defined in Table A.6.6.3.1.1-3			

Table A.6.6.19.3.2-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in non-DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6	1	
Duplex mode			1, 2, 3	FDD	
			4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
BW _{channel}		MHz	1, 4	10: N _{RB,c} = 52 (FDD)	
			2, 5	10: N _{RB,c} = 52 (TDD)	
			3, 6	40: N _{RB,c} = 106 (TDD)	
PDSCH reference measurement channel			1, 4	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	

BWP configurations	Initial DL BWP		3, 6	CCR.2.1 TDD	
			1, 2, 3, 4, 5, 6	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1	
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration			1, 2, 4, 5	SSB.1 FR1	
			3, 6	SSB.2 FR1	
CSI-RS for tracking			1, 4	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1	dBm		1, 2, 4, 5	--96	
			3, 6	--93	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} ^{Note2}		dBm/15 KHz	1, 2, 3, 4, 5, 6	-104	
N_{oc} ^{Note2}		dBm/SCS	1, 2, 4, 5	-104	
			3, 6	-101	
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	16	0
$\hat{E}_s/I_{ot}$ ^{Note3}		dB	1, 2, 3, 4, 5, 6	16	0
SS-RSRP ^{Note3}		dBm/SCS	1, 2, 4, 5	-88	-104
			3, 6	-85	-101
SSB_RP ^{Note3}		dBm/SCS	1, 2, 4, 5	-88	-104
			3, 6	-85	-101
I_o ^{Note3}		dBm/9.36 MHz	1, 2, 4, 5	-59.94	-73.04
		dBm/38.16 MHz	3, 6	-53.84	-66.93
Propagation condition			1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6	1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Table A.6.6.19.3.2-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	

Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	17
$\hat{E}_s/I_{ot}$ ^{Note5}	dB	1, 2, 3, 4, 5, 6	-Infinity	17
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-87
I _o ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6	-76.22+10log (N _{RB,c} /50)	-59.13+10log (N _{RB,c} /50)
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2	
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].			
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.			
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 5:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.6.6.19.3.3 Test Requirements

The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

During T2, UE shall send HARQ-ACK/NACK for the corresponding PDSCH scheduled in PCell in all the slots except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.19.4 Event triggered reporting on SCC with deactivated SCell test with per-UE NCSG under non-DRX

A.6.6.19.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the cell search requirements on SCC with deactivated SCell in clauses 9.2.7.1 and 9.2.7.2.

A.6.6.19.4.2 Test parameters

Three cells are deployed in the test, which are FR1 PCell (Cell 1), FR1 SCell (Cell 2) and FR1 neighbour cell (Cell 3) on the same frequency as the SCell. The SCell is deactivated during the test. The test parameters for PCell, the SCell and the neighbour cell are given in Table A.6.6.19.4.2-1 and A.6.6.19.4.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A6 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 3. The PCell shall continuously scheduled with data in the DL starting from T1 until the UE has sent the measurement report during T2.

Table A.6.6.19.4.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.6.6.19.4.2-2: General test parameters for event triggered reporting on SCC with deactivated SCell with per-UE NCSG for FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	
Configured deactivated SCell		1, 2, 3	Cell 2	
Neighbour cell		1, 2, 3	Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1	
RF Channel Number		1, 2, 3	2: Cell 2 and Cell 3	
Measurement gap type		1, 2, 3	Per-UE NCSG	
NCSG pattern		1, 2, 3	ID # 0	Defined in Table 9.1.9.3-1
MGTA	ms	1, 2, 5	0	

SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A6-Offset	dB	1, 2, 3	-4.5	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
SCell measurement cycle (measCycleSCell)	ms	1, 2, 3	160	
Cell 2 timing offset to Cell 1	μs	1, 2, 3	0	
Time alignment error between Cell 2 and Cell 1	μs	1, 2, 3	≤ Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
Cell 3 timing offset to Cell 1	μs	1, 2, 3	3	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

Table A.6.6.19.4.2-3: NR Cell specific test parameters for event triggered reporting on SCC with deactivated SCell with per-UE NCSG for FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
			T1	T2	T1	T2	T1	T2
TDD configuration		1	N/A		N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A		N/A	
		2	SR.1.1 TDD					
		3	SR.2.1 TDD					
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A		N/A	
		2	CR.1.1 TDD					
		3	CR.2.1 TDD					
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A		N/A	
		2	CCR.1.1 TDD					
		3	CCR.2.1 TDD					
OCNG Patterns		1, 2, 3	OP.1		OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		TRS.1.1 FDD			
		2	TRS.1.1 TDD		TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1		DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		ULBWP.1.1		N/A	
N_{oc} Note 2	dBm/SCS	1	-98					

		2	-98					
		3	-95					
N_{oc} Note 2	dBm/15 kHz	1, 2, 3	-98					
$\hat{E}_s/I_{ot}$	dB	1, 2, 3	4	4	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2, 3	4	4	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1	-94	-94	-94	-94	-Infinity	-94
		2	-94	-94	-94	-94	-Infinity	-94
		3	-91	-91	-91	-91	-Infinity	-91
lo	dBm/9.36 MHz	1	-64.60	-64.60	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-64.60	-64.60	-62.25	-64.60	-62.25
	dBm/38.16 MHz	3	-58.50	-58.50	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1, 2, 3	AWGN					
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.6.6.19.4.3 Test Requirements

The UE shall send one Event A6 triggered measurement report, with a measurement reporting delay less than 1600 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall be scheduled on PCell continuously throughout the test. From the start of T1 until the measurement report is received during T2, UE shall send HARQ ACK/NACK for the corresponding PDSCH scheduled in PCell in all the slots except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

For a test to be considered successful requirements on both Event A6 detection and percentage of transmitted ACK/NACKs have to be fulfilled simultaneously.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.6.6.20 UE Rx-Tx time difference measurement for propagation delay compensation

A.6.6.20.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement for RTT-based PDC meets the requirements specified in clause 9.12.4.1 for measurement delay and clause 10.1.39.2 for measurement accuracy in AWGN propagation condition in FR1 in standalone scenario.

The supported test configurations in listed in Table A.6.6.20.1-1.

Table A.6.6.20.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

The test is considered with one cell (Cell 1) in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. If the test is based on PRS, the Cell 1 mutes PRS transmission during T1 and transmits PRS during T2.

If the test is based on PRS, the *MeasObjectRxTxDiff-r17* with *prs-Ref-r17*, *measObject* with *measObjectRxTxDiff-r17*, and *NR-DL-PRS-PDC-Info* as defined in TS 38.331 shall be provided to the UE during T1.

The last TTI containing the RRC configuration shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 10$ ms.

The beginning of the time interval T2 shall be aligned with the beginning of the first PRS resources.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.6.20.1-2. The test parameters for PRS are given Table A.6.6.20.1-3.

Table A.6.6.20.1-2: General test parameters

Parameter	Unit	Test configuration	Value
Active cell		1, 2, 3	Cell 1
RF Channel Number		1, 2, 3	1
BW _{channel}	MHz	1	10: N _{RB,c} = 52
		2	10: N _{RB,c} = 52
		3	40: N _{RB,c} = 106
SSB configuration		1	SSB.1 FR1
		2	SSB.1 FR1
		3	SSB.2 FR1
SMTC configuration		1	SMTC.2
		2	SMTC.1
		3	SMTC.1
CP length		1, 2, 3	Normal
DRX		1, 2, 3	OFF
T1	s	1, 2, 3	5
T2	s	1, 2, 3	10

Table A.6.6.20.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1	N/A	
		2	TDDConf.1.1	
		3	TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	
		2	CCR.1.1 TDD	

		3	CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1	
TRS Configuration		1	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	
PRS configuration		1	PRS.1.2 FR1	
		2	PRS.1.2 FR1	
		3	PRS.2.2 FR1	
PRS muting info		1, 2, 3	'10'	
SRS configuration		1	PDC-SRS.1	
		2	PDC-SRS.1	
		3	PDC-SRS.2	
N_{oc} Note 2	dBm/SCS	1	-98	
		2	-98	
		3	-95	
N_{oc} Note 2	dBm/15 kHz	1	-98	
		2	-98	
		3	-98	
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41
		2		
		3		
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2
		2		
		3		
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-100
		2	-Infinity	-100
		3	-Infinity	-97
Io	dBm/9.36 MHz	1	N/A	-67.67
	dBm/9.36 MHz	2		-67.67
	dBm/38.16 MHz	3		-61.57
Propagation Condition		1, 2, 3	AWGN	
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.				
Note 2: The noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.6.20.2 Test requirements

If the test is based on PRS, the UE Rx-Tx time difference measurement time fulfils the requirements specified in 9.12.4.1.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

The UE Rx-Tx time difference measurement time fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.39.2 for Cell 1.

A.6.6.21 UE Rx-Tx time difference measurement with TRS for RTT-based PDC in FR1 SA

A.6.6.21.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement with TRS for RTT-based PDC meets the requirements specified in clause 9.12.4.2 for measurement delay and clause 10.1.39.3 for measurement accuracy in AWGN propagation condition in FR1 in standalone scenario.

AWGN propagation condition in FR1 in standalone scenario.

The supported test configurations are listed in Table A.6.6.21.1-1.

Table A.6.6.21.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There is a single cell in the test: PCell (Cell 1) on RF channel 1 in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 does not have TRS transmission during T1 and transmits TRS during T2.

The measurement control information with *MeasObjectRxTxDiff* set to 'csi-RS-Ref' as defined in TS 38.331 [2], shall be provided to the UE during T1. The last TTI containing the RRC message shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 10$ ms is the maximum processing time of the measurement request.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.6.21.1-2 and Table A.6.6.21.1-3 respectively. The test consists two sub-tests with different TRS BW.

Table A.6.6.21.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	Cell 1 is the PCell
RF Channel Number		1, 2, 3	1	
BW _{channel}	MHz	1	10: N _{RB,c} = 52	
		2	10: N _{RB,c} = 52	
		3	40: N _{RB,c} = 106	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	OFF	

T1	s	1, 2, 3	1	
T2	s	1, 2, 3	1	

Table A.6.6.21.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Values	
			T1	T2
TDD configuration		1	N/A	
		2	TDDConf.1.1	
		3	TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1	
TRS Configuration		1	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3	DLBWP.1.1	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	
SRS configuration		1	PDC-SRS.1	
		2	PDC-SRS.1	
		3	PDC-SRS.2	
N_{oc} Note 2	dBm/SCS	1	-98	
		2	-98	
		3	-95	
N_{oc} Note 2	dBm/15 kHz	1	-98	
		2		
		3		
TRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-3
		2		
		3		
TRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-3
		2		
		3		
TRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-101
		2	-Infinity	-101
		3	-Infinity	-98
Io	dBm/9.36 MHz	1	N/A	-68.28
	dBm/9.36 MHz	2		-68.28
	dBm/38.16 MHz	3		-62.19
Propagation Condition		1, 2, 3	AWGN	
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: TRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.6.21.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.12.4.2.

The UE shall perform and report the UE Rx-Tx time difference measurement for Cell 1 within the specified UE Rx-Tx time difference measurement time starting from the beginning of T2.

The UE Rx-Tx time difference measurement time fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.39.3.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%.

A.6.7 Measurement Performance requirements

Unless explicitly stated otherwise:

- Reported measurements shall be within defined range of accuracy limits defined in Clause 10 for at least 90 % of the reported cases. If multiple measurement performance requirements are verified in the same test, the reported measurements for each requirement shall be within defined range of accuracy limits of the corresponding requirement defined in Clause 10 for at least 90% of the reported cases.
- Measurements are performed in RRC_CONNECTED state.
- The reference channels assume transmission of PDSCH with a maximum number of 5 HARQ transmissions unless otherwise specified.

A.6.7.1 SS-RSRP

A.6.7.1.1 SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.2.1.1 and 10.1.2.1.2 for intra-frequency measurements.

A.6.7.1.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.7.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.6.7.1.1.2-2. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell.

Table A.6.7.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.7.1.1.2-2: SS-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					

TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		40: N _{RB,c} = 106					
BWP BW	Config 1		10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		40: N _{RB,c} = 106					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
SSB configuration	Config 1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1	ms	-	3	-	3	-	3
	Config 2,3	μs	-	3	-	3	-	3
SMTC configuration	Config 1		SMTC.2					
	Config 2,3		SMTC.1					
OCNG Patterns			OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								

EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} ^{Note2}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15Kh Z	-106		-88		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable ^{Note 5}		-94		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} ^{Note2}	Config 1,2		dBm/SCS	-106		-88		Same as Noc/15kHz	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6						Not applicable ^{Note 5}	
		NR_FDD_FR1_B		-110.5					
		NR_TDD_FR1_C		-110					
		NR_FDD_FR1_D, NR_TDD_FR1_D		-109.5					
		NR_FDD_FR1_E, NR_TDD_FR1_E		-109					
		NR_FDD_FR1_F		-108.5					
		NR_FDD_FR1_G		-108					
		NR_FDD_FR1_H		-107.5					
	$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	2.46	-5.97	-0.01
$\hat{E}_s/N_{oc}$			dB	6	1	6	1	3	0
SS- RSRP ^{Not e3}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-100	-105	-82	-87	-	-
		NR_FDD_FR1_B						111.00	114.00
		NR_TDD_FR1_C						-	-
		NR_FDD_FR1_D, NR_TDD_FR1_D						110.50	113.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-	-

		NR_FDD_FR1_F						-	-
		NR_FDD_FR1_G						108.50	111.50
		NR_FDD_FR1_H						-	-
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5	Not applicable Note 5	-85	-90	-	-
		NR_FDD_FR1_B						108.00	111.00
		NR_TDD_FR1_C						-	-
		NR_FDD_FR1_D, NR_TDD_FR1_D						107.50	110.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-	-
		NR_FDD_FR1_F						107.00	110.00
		NR_FDD_FR1_G						-	-
		NR_FDD_FR1_H						106.50	109.50
		-						-	
		-						-	
		-						-	
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-	-								
-									

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.6.7.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for cell 1 and cell 2 shall fulfil absolute requirement in clause 10.1.2.1.1 and relative requirement in clause 10.1.2.1.2.

A.6.7.1.2 SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.4.1.1 and 10.1.4.1.2 for inter-frequency measurements with the testing configurations for NR cells in Table A.6.7.1.2.1-1.

Table A.6.7.1.2.1-1: Applicable NR configurations for FR1 inter-frequency SS-RSRP accuracy test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.1.2.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.6.7.1.2.2-1 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.6.7.1.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.6.7.1.2.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~3		freq1	freq2	freq1	freq2
BW _{channel}	1	MHz	10: N _{RB,c} = 52		10: N _{RB,c} = 52	
	2		10: N _{RB,c} = 52		10: N _{RB,c} = 52	
	3		40: N _{RB,c} = 106		40: N _{RB,c} = 106	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD		CR.1.1 TDD	
	3		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD		CCR.1.1 TDD	

	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1	ms	-	3	-	3
	2,3	μs	-	3	-	3
SMTC configuration	1		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
N_{oc} ^{Note2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1~3	dBm/15 kHz	-94.65	$(N_{oc}$ for Channel 2 +8dB)	-115
	NR_FDD_FR1_B					-114.5
	NR_TDD_FR1_C					-114
	NR_FDD_FR1_D, NR_TDD_FR1_D					-113.5
	NR_FDD_FR1_E, NR_TDD_FR1_E					-113
	NR_FDD_FR1_F					-112.5
	NR_FDD_FR1_G					-112
	NR_FDD_FR1_H					-111.5
N_{oc} ^{Note2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1,2	dBm/SS B SCS	-94.65	$(N_{oc}$ for Channel 2 +8dB)	-115
	NR_FDD_FR1_B					-114.5
	NR_TDD_FR1_C					-114
	NR_FDD_FR1_D, NR_TDD_FR1_D					-113.5
	NR_FDD_FR1_E, NR_TDD_FR1_E					-113
	NR_FDD_FR1_F					-112.5
	NR_FDD_FR1_G					-112
	NR_FDD_FR1_H					-111.5

NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 ₁		3		-91.65		(N _{oc} for Channel 2 +8dB)	-112.00	
NR_FDD_FR1_B							-111.50	
NR_TDD_FR1_C							-111.00	
NR_FDD_FR1_D, NR_TDD_FR1_D							-110.50	
NR_FDD_FR1_E, NR_TDD_FR1_E							-110.00	
NR_FDD_FR1_F							-109.50	
NR_FDD_FR1_G							-109.00	
NR_FDD_FR1_H							-108.50	
Ê _s /I _{ot}		1~3	dB	10	10	13	-3	
SS- RSRP ^{Note3}	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 ₁	1,2	dBm/SC S	-84.65		(RSRP for Cell 2 +25dB)	-118.00	
	NR_FDD_FR1_B						-117.50	
	NR_TDD_FR1_C						-117.00	
	NR_FDD_FR1_D, NR_TDD_FR1_D						-116.50	
	NR_FDD_FR1_E, NR_TDD_FR1_E						-116.00	
	NR_FDD_FR1_F						-115.50	
	NR_FDD_FR1_G						-115.00	
	NR_FDD_FR1_H						-114.50	
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 ₁	3		-81.65		(RSRP for Cell 2 +25dB)	-115.00	
	NR_FDD_FR1_B						-114.50	
	NR_TDD_FR1_C						-114.00	
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.50	
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113.00	
	NR_FDD_FR1_F						-112.50	
	NR_FDD_FR1_G						-112.00	
	NR_FDD_FR1_H						-111.50	
I _o ^{Note3}	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 ₁	1,2	dBm/ 9.36MH z	-56.28		(I _o for Channel 2 +19.75dB)	-85.28	
	NR_FDD_FR1_B						-84.78	
	NR_TDD_FR1_C						-84.28	
	NR_FDD_FR1_D, NR_TDD_FR1_D						-83.78	
	NR_FDD_FR1_E, NR_TDD_FR1_E						-83.28	
	NR_FDD_FR1_F						-82.78	
	NR_FDD_FR1_G						-82.28	
	NR_FDD_FR1_H						-81.78	
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5 ₁	3		dBm/ 38.16M Hz	-50.19		(I _o for Channel 2 +19.75dB)	-79.19
	NR_FDD_FR1_B							-78.69
	NR_TDD_FR1_C							-78.19
	NR_FDD_FR1_D, NR_TDD_FR1_D							-77.69
	NR_FDD_FR1_E, NR_TDD_FR1_E							-77.19
	NR_FDD_FR1_F							-76.69
	NR_FDD_FR1_G							-76.19
	NR_FDD_FR1_H							-75.69

$\hat{E}_s / N_{oc}$	1~3	dB	10	10	13	-3
Propagation condition	1~3	-	AWGN		AWGN	
Antenna configuration	1~3		1x2		1x2	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.					

A.6.7.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirement in clause 10.1.4.1.1 and relative requirement in clause 10.1.4.1.2.

A.6.7.1.3 Void

A.6.7.2 SS-RSRQ

A.6.7.2.1 SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.7.1.1.

A.6.7.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.6.7.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is tested by using the parameters in Table A.6.7.2.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.6.7.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					

		Config 3	MHz	TDDConf.2.1					
BW _{channel}	Config 1			10: N _{RB,c} = 52					
	Config 2			10: N _{RB,c} = 52					
	Config 3			40: N _{RB,c} = 106					
BWP configuration	Initial DL BWP			DLBWP.0.1					
	Dedicated DL BWP			DLBWP.1.1					
	Initial UL BWP			ULBWP.0.1					
	Dedicated UL BWP			ULBWP.1.1					
DRX Cycle			ms	Not Applicable					
PDSCH Reference measurement channel	Config 1			SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2			SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3			SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1			CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2			CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3			CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Control Channel RMC	Config 1			CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2			CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3			CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS Configuration	Config 1			TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2			TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3			TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns				OP. 1					
SS-RSSI-Measurement				Not Applicable					
Time offset with Cell 1	Config 1		ms	-	3	-	3	-	3
	Config 2,3		μs	-	3	-	3	-	3
SMTC configuration	Config 1			SMTC.2					
	Config 2,3			SMTC.1					
SSB configuration	Config 1,2			SSB.1 FR1					
	Config 3			SSB.2 FR1					
CSI-RS for tracking	Config 1			TRS.1.1 FDD					
	Config 2			TRS.1.1 TDD					
	Config 3			TRS.1.2 TDD					
PDSCH/PDCCH subcarrier spacing	Config 1,2		kHz	15 kHz					
	Config 3			30kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N _{oc} ^{Note2}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz z	-85		-101		-114	

		NR_FDD_FR1_B	dBm/SCS					-113.5		
		NR_TDD_FR1_C						-113		
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5		
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112		
		NR_FDD_FR1_F						-111.5		
		NR_FDD_FR1_G						-111		
		NR_FDD_FR1_H						-110.5		
		Config 3						NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	-91	-
	NR_FDD_FR1_B			-113.5						
	NR_TDD_FR1_C			-113						
	NR_FDD_FR1_D, NR_TDD_FR1_D			-112.5						
	NR_FDD_FR1_E, NR_TDD_FR1_E			-112						
	NR_FDD_FR1_F			-111.5						
	NR_FDD_FR1_G			-111						
	NR_FDD_FR1_H			-110.5						
	N_{oc} ^{Note2}	Config 1,2		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	-85	-101	-114			
NR_FDD_FR1_B			-113.5							
NR_TDD_FR1_C			-113							
NR_FDD_FR1_D, NR_TDD_FR1_D			-112.5							
NR_FDD_FR1_E, NR_TDD_FR1_E			-112							
NR_FDD_FR1_F			-111.5							
NR_FDD_FR1_G			-111							
NR_FDD_FR1_H			-110.5							
Config 3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	-88	-	-111					
		NR_FDD_FR1_B			-110.5					
		NR_TDD_FR1_C			-110					
		NR_FDD_FR1_D, NR_TDD_FR1_D			-109.5					
		NR_FDD_FR1_E, NR_TDD_FR1_E			-109					
		NR_FDD_FR1_F			-108.5					
		NR_FDD_FR1_G			-108					
		NR_FDD_FR1_H			-107.5					
$\hat{E}_s/I_{ot}$			dB		-1.76		-4.7		-5.46	-5.46
$\hat{E}_s/N_{oc}$			dB		3 3		-2.9 -2.9		-4	-4
SS- RSRP ^{Note 3}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-82	-82	-103.9	-103.9	-118	-118	
		NR_FDD_FR1_B						-117.5	-117.5	
		NR_TDD_FR1_C						-117	-117	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-116.5	-116.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-116	-116	
		NR_FDD_FR1_F						-115.5	-115.5	
		NR_FDD_FR1_G						-115	-115	
		NR_FDD_FR1_H						-114.5	-114.5	

	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85	-85	-	-	-115	-115
		NR_FDD_FR1_B						-114.5	-114.5
		NR_TDD_FR1_C						-114	-114
		NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5	-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-113	-113
		NR_FDD_FR1_F						-112.5	-112.5
		NR_FDD_FR1_G						-112	-112
		NR_FDD_FR1_H						-111.5	-111.5
		SS-RSRQ ^{Note3}							NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6
NR_FDD_FR1_B									
NR_TDD_FR1_C									
NR_FDD_FR1_D, NR_TDD_FR1_D									
NR_FDD_FR1_E, NR_TDD_FR1_E									
NR_FDD_FR1_F									
NR_FDD_FR1_G									
NR_FDD_FR1_H									
^{Note3} 									

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.7.1.1.

A.6.7.2.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.9.1.1 and 10.1.9.1.2.

A.6.7.2.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.6.7.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.6.7.2.2.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.6.7.2.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.2.2.2-2: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		40: N _{RB,c} = 106					
Gap pattern ID	Config 1,2,3		0					
BWP BW	Config 1		10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		40: N _{RB,c} = 106					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	

		Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Dedicated CORESET Reference Channel		Config 1		CCR.1 .1 FDD	-	CCR.1 1 FDD	-	CCR.1 1 FDD	-
		Config 2		CCR.1 .1 TDD		CCR.1. 1 TDD		CCR.1. 1 TDD	
		Config 3		CCR2. 1 TDD		CCR2.1 TDD		CCR2. 1 TDD	
TRS Configuration		Config 1		TRS.1. 1 FDD	-	TRS.1.1 FDD	-	TRS.1. 1 FDD	-
		Config 2		TRS.1. 1 TDD		TRS.1.1 TDD		TRS.1. 1 TDD	
		Config 3		TRS.1. 2 TDD		TRS.1.2 TDD		TRS.1. 2 TDD	
OCNG Patterns				OCNG pattern 1					
Time offset with Cell 1		Config 1	ms	-	3	-	3	-	3
		Config 2,3	µs	-	3	-	3	-	3
SMTC configuration		Config 1		SMTC pattern 2					
		Config 2,3		SMTC pattern 1					
SSB configuration		Config 1,2		SSB pattern 1 in FR1					
		Config 3		SSB pattern 2 in FR1					
CSI-RS for tracking		Config 1		TRS.1.1 FDD					
		Config 2		TRS.1.1 TDD					
		Config 3		TRS.1.2 TDD					
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz					
		Config 3		30 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} ^{Note2}	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18	-106	-116			
		NR_FDD_FR1_B				-115.5			
		NR_TDD_FR1_C				-115			
		NR_FDD_FR1_D NR_TDD_FR1_D				-114.5			
		NR_FDD_FR1_E NR_TDD_FR1_E				-114			
		NR_FDD_FR1_F				-113.5			
		NR_FDD_FR1_G				-113			
		NR_FDD_FR1_H				-112.5			
		N_{oc} ^{Note2}				Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-86.27
NR_FDD_FR1_B	-115.5								
NR_TDD_FR1_C	-115								
NR_FDD_FR1_D NR_TDD_FR1_D	-114.5								
NR_FDD_FR1_E NR_TDD_FR1_E	-114								
NR_FDD_FR1_F	-113.5								
NR_FDD_FR1_G	-113								
NR_FDD_FR1_H	-112.5								

N_{oc} Note2	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18		-106		-116			
		NR_FDD_FR1_B						-115.5			
		NR_TDD_FR1_C						-115			
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5			
		NR_FDD_FR1_E NR_TDD_FR1_E						-114			
		NR_FDD_FR1_F						-113.5			
		NR_FDD_FR1_G						-113			
		NR_FDD_FR1_H						-112.5			
		Config 3						NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	-83.27		-110
	NR_FDD_FR1_B			-112.5							
	NR_TDD_FR1_C			-112							
	NR_FDD_FR1_D NR_TDD_FR1_D			-111.5							
	NR_FDD_FR1_E NR_TDD_FR1_E			-111							
	NR_FDD_FR1_F			-110.5							
	NR_FDD_FR1_G			-110							
	NR_FDD_FR1_H			-109.5							
	$\hat{E}_s/I_{ot}$			dB	-1.75		-1.75				
	$\hat{E}_s/N_{oc}$			dB	-1.75		-1.75		3	-1.75	
SS-RSRP Not e3	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-81.93	-81.93	- 107.75	- 107.75	-113	- 117.7 5		
		NR_FDD_FR1_B						-112.5	- 117.2 5		
		NR_TDD_FR1_C						-112	- 116.7 5		
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	- 116.2 5		
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	- 115.7 5		
		NR_FDD_FR1_F						-110.5	- 115.2		
		NR_FDD_FR1_G						-110	- 114.7 5		
		NR_FDD_FR1_H						-109.5	- 114.2 5		
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85.02	-85.02	- 111.75	- 111.75	-110	- 114.7 5		
		NR_FDD_FR1_B						-109.5	- 114.2 5		
		NR_TDD_FR1_C						-109	- 113.7 5		

		NR_FDD_FR1_D NR_TDD_FR1_D						-108.5	- 113.2 5
		NR_FDD_FR1_E NR_TDD_FR1_E						-108	- 112.7 5
		NR_FDD_FR1_F						-107.5	- 112.2
		NR_FDD_FR1_G						-107	- 111.7 5
		NR_FDD_FR1_H						-106.5	- 111.2 5
SS-RSRQ ^{Note3}		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-14.77	-14.77	-14.77	-14.77	12.56T	14.76 T
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D NR_TDD_FR1_D							
		NR_FDD_FR1_E NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io ^{Note3}	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-50		-75.83		-83.28	- 85.83
		NR_FDD_FR1_B						-82.78	- 85.33
		NR_TDD_FR1_C						-82.28	- 84.83
		NR_FDD_FR1_D NR_TDD_FR1_D						-81.78	- 84.33
		NR_FDD_FR1_E NR_TDD_FR1_E						-81.28	- 83.83
		NR_FDD_FR1_F						-80.78	- 83.33
		NR_FDD_FR1_G						-80.28	- 82.83
		NR_FDD_FR1_H						-79.78	- 82.33
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-50		-76.73		-77.19	- 79.73
		NR_FDD_FR1_B						-76.69	- 79.23
		NR_TDD_FR1_C						-76.19	- 78.73
		NR_FDD_FR1_D NR_TDD_FR1_D						-75.69	- 78.23
		NR_FDD_FR1_E NR_TDD_FR1_E						-75.19	- 77.73
		NR_FDD_FR1_F						-74.69	- 77.23
		NR_FDD_FR1_G						-74.19	- 76.73
		NR_FDD_FR1_H						-73.69	- 76.53

Propagation condition	-	AWG N	AWGN	AWGN	AWGN	AWG N	AWG N
Antenna configuration		1x2	1x2	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRQ, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: NR operating band groups are as defined in clause 3.5.2. Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.							

A.6.7.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.9.1.1 and 10.1.9.1.2.

A.6.7.3 SS-SINR

A.6.7.3.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.12.1.1.

A.6.7.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.6.7.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.6.7.3.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.6.7.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			

Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1		TRS.1.1 FDD		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
SMTC configuration	Config 1		SMTC.2			
	Config 2,3		SMTC.1			
Time offset with Cell 1	Config 1	ms	-	3	-	3
	Config 2,3	μs	-	3	-	3
SSB configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15			
	Config 3		30			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 6}	dBm/15kHz	-93		-116	
	NR_FDD_FR1_B				-115.5	
	NR_TDD_FR1_C				-115	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-114.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-114	

		NR_FDD_FR1_F					-113.5				
		NR_FDD_FR1_G					-113				
		NR_FDD_FR1_H					-112.5				
N_{oc} ^{Note2}	Config 1,2		dBm/SCS	-93		Same as Noc for 15 kHz					
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-90		-113					
		NR_FDD_FR1_B				-112.5					
		NR_TDD_FR1_C				-112					
		NR_FDD_FR1_D, NR_TDD_FR1_D				-111.5					
		NR_FDD_FR1_E, NR_TDD_FR1_E				-111					
		NR_FDD_FR1_F				-110.5					
		NR_FDD_FR1_G				-110					
		NR_FDD_FR1_H				-109.5					
		$\hat{E}_s / I_{ot}$				dB	0	-3.19	-5.46	-5.46	
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4				
SS-RSRP ^{Not e3}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-88.46	-90.34	-120	-120				
		NR_FDD_FR1_B				-119.5	-119.5				
		NR_TDD_FR1_C				-119	-119				
		NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5	-118.5				
		NR_FDD_FR1_E, NR_TDD_FR1_E				-118	-118				
		NR_FDD_FR1_F				-117.5	-117.5				
		NR_FDD_FR1_G				-117	-117				
		NR_FDD_FR1_H				-116.5	-116.5				
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85.46	-87.34	-117	-117				
		NR_FDD_FR1_B				-116.5	-116.5				
		NR_TDD_FR1_C				-116	-116				
		NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5	-115.5				
		NR_FDD_FR1_E, NR_TDD_FR1_E				-115	-115				
		NR_FDD_FR1_F				-114.5	-114.5				
		NR_FDD_FR1_G				-114	-114				
		NR_FDD_FR1_H				-113.5	-113.5				
		SS-SINR ^{Note3}				dB	0	-3.19	-5.46	-5.46	
		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6									
NR_FDD_FR1_B											
NR_TDD_FR1_C											
NR_FDD_FR1_D, NR_TDD_FR1_D											
NR_FDD_FR1_E, NR_TDD_FR1_E											
NR_FDD_FR1_F											
NR_FDD_FR1_G											
NR_FDD_FR1_H											
I_o ^{Note3}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.5		-85.51					
		NR_FDD_FR1_B				-85.01					

	Config 3	NR_TDD_FR1_C	dBm/ 38.16MHz	-51.41	-84.51
		NR_FDD_FR1_D, NR_TDD_FR1_D			-84.01
		NR_FDD_FR1_E, NR_TDD_FR1_E			-83.51
		NR_FDD_FR1_F			-83.01
		NR_FDD_FR1_G			-82.51
		NR_FDD_FR1_H			-82.01
		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6			-79.41
		NR_FDD_FR1_B			-78.91
		NR_TDD_FR1_C			-78.41
		NR_FDD_FR1_D, NR_TDD_FR1_D			-77.91
		NR_FDD_FR1_E, NR_TDD_FR1_E			-77.41
		NR_FDD_FR1_F			-76.91
		NR_FDD_FR1_G			-76.41
		NR_FDD_FR1_H			-75.91
Propagation condition			-	AWGN	
Antenna configuration			-	1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SS-SINR, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5: NR operating band groups are as defined in clause 3.5.2.					
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.					

A.6.7.3.1.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.12.1.1.

A.6.7.3.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.14.1.1 and 10.1.14.1.2.

A.6.7.3.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.6.7.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.6.7.3.2.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.6.7.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.3.2.2-2: SS-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
Gap pattern ID			0	-	0	-	0	-
TRS configuration	Config 1		TRS.1.1 FDD		TRS.1.1 FDD		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
OCNG Patterns			OP.1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 1	Config 1	ms	-	3	-	3	-	3
	Config 2,3	μs	-	3	-	3	-	3
SMTC configuration	Config 1		SMTC pattern 2					
	Config 2,3		SMTC pattern 1					
SSB configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15					
	Config 3		30					

EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0										
EPRE ratio of PBCH DMRS to SSS																			
EPRE ratio of PBCH to PBCH DMRS																			
EPRE ratio of PDCCH DMRS to SSS																			
EPRE ratio of PDCCH to PDCCH DMRS																			
EPRE ratio of PDSCH DMRS to SSS																			
EPRE ratio of PDSCH to PDSCH																			
EPRE ratio of OCNG DMRS to SSS(Note 1)																			
EPRE ratio of OCNG to OCNG DMRS (Note 1)																			
N_{oc} ^{Note2}	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-88	-108.5	-119.5													
		NR_FDD_FR1_B								-119									
		NR_TDD_FR1_C								-118.5									
		NR_FDD_FR1_D NR_TDD_FR1_D								-118									
		NR_FDD_FR1_E NR_TDD_FR1_E								-117.5									
		NR_FDD_FR1_F								-117									
		NR_FDD_FR1_G								-116.5									
		NR_FDD_FR1_H								-116									
		N_{oc} ^{Note2}								Config 1,2		dBm/SCS	-88	-108.5	Same as Noc for 15kHz				
Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85	-105.5	-116.5														
									NR_FDD_FR1_B										-116
									NR_TDD_FR1_C										-115.5
									NR_FDD_FR1_D NR_TDD_FR1_D										-115
									NR_FDD_FR1_E NR_TDD_FR1_E										-114.5
									NR_FDD_FR1_F										-114
									NR_FDD_FR1_G										-114.5
									NR_FDD_FR1_H	-113									
									$\hat{E}_s/I_{ot}$			dB	-1.75	-1.75	20	20	-4.0	-4.0	
$\hat{E}_s/N_{oc}$			dB	-1.75		20		-4.0											
SS- RSRP ^{Note3}	Config 1,2		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-89.75	-88.5	-123.5												
			NR_FDD_FR1_B								-123								
			NR_TDD_FR1_C								-122.5								
			NR_FDD_FR1_D NR_TDD_FR1_D								-122								
			NR_FDD_FR1_E NR_TDD_FR1_E								-121.5								
			NR_FDD_FR1_F								-121								
		NR_FDD_FR1_G	-120.5																
		NR_FDD_FR1_H	-120																
	Config 3	NR_FDD_FR1_A	-86.75	-85.5	-120.5														

		NR_TDD_FR1_A NOTE 6				
		NR_FDD_FR1_B				-120
		NR_TDD_FR1_C				-119.5
		NR_FDD_FR1_D				-119
		NR_TDD_FR1_D				
		NR_FDD_FR1_E				-118.5
		NR_TDD_FR1_E				
		NR_FDD_FR1_F				-118
		NR_FDD_FR1_G				-117.5
		NR_FDD_FR1_H				-117
SS-SINR ^{Note3}		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-1.75	20	-4.0
		NR_FDD_FR1_B				
		NR_TDD_FR1_C				
		NR_FDD_FR1_D				
		NR_TDD_FR1_D				
		NR_FDD_FR1_E				
		NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
Io ^{Note3}	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.83	-60.5	-90.09
		NR_FDD_FR1_B				-89.59
		NR_TDD_FR1_C				-89.09
		NR_FDD_FR1_D				-88.59
		NR_TDD_FR1_D				
		NR_FDD_FR1_E				-88.09
		NR_TDD_FR1_E				-87.59
		NR_FDD_FR1_F				-87.09
		NR_FDD_FR1_G	-86.59			
		NR_FDD_FR1_H				
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-51.73	-54.41	-84
		NR_FDD_FR1_B				-83.5
		NR_TDD_FR1_C				-83
		NR_FDD_FR1_D				-82.5
		NR_TDD_FR1_D				
		NR_FDD_FR1_E				-82
		NR_TDD_FR1_E				-81.5
		NR_FDD_FR1_F				-81
		NR_FDD_FR1_G	-80.5			
		NR_FDD_FR1_H				
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5:	NR operating band groups are as defined in clause 3.5.2.					
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.					

A.6.7.3.2.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.14.1.1 and 10.1.14.1.2.

A.6.7.4 L1-RSRP measurement for beam reporting

A.6.7.4.1 SSB based L1-RSRP measurement

A.6.7.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.5.2 and clause 10.1.19.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.6.7.4.1.1-1.

Table A.6.7.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.4.1.2 Test parameters

In this set of test cases there one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.7.4.1.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.6.7.4.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.6.7.4.1.2-1: FR1 SSB based L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~3		freq1	freq1
Duplex mode	1		FDD	FDD
	2		TDD	TDD
	3		TDD	TDD
TDD Configuration	1		N/A	N/A
	2		TDDConf.1.1	TDDConf.1.1
	3		TDDConf.2.1	TDDConf.2.1
BW _{channel}	1	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52	10: N _{RB,c} = 52
	3		40: N _{RB,c} = 106	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 FDD
	2		SR.1.1 TDD	SR.1.1 TDD
	3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 FDD
	2		CR.1.1 TDD	CR.1.1 TDD
	3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 FDD
	2		CCR.1.1 TDD	CCR.1.1 TDD

		3		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration		1		SSB.3 FR1	SSB.3 FR1
		2		SSB.3 FR1	SSB.3 FR1
		3		SSB.4 FR1	SSB.4 FR1
OCNG Patterns		1~3		OP.1	OP.1
Initial BWP Configuration		1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
TRS configuration		1		TRS.1.1 FDD	TRS.1.1 FDD
		2		TRS.1.1 TDD	TRS.1.1 TDD
		3		TRS.1.2 TDD	TRS.1.2 TDD
Dedicated BWP configuration		1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~3		SMTC.1	SMTC.1
reportConfigType		1~3		periodic	periodic
reportQuantity		1~3		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS		1~3		2	2
L1-RSRP reporting period		1~3		slot80	slot80
EPRE ratio of PSS to SSS		1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5				
	NR_FDD_FR1_B	-116.5			
	NR_TDD_FR1_C	-116			
	NR_FDD_FR1_D, NR_TDD_FR1_D	-115.5			
	NR_FDD_FR1_E, NR_TDD_FR1_E	-115			
	NR_FDD_FR1_F	-114.5			
	NR_FDD_FR1_G	-114			
	NR_FDD_FR1_H	-113.5			
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/SSB SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5

	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s/I_{ot}$		1~3	dB	10	-3
SSB RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/SSB SCS	-84.65	-120
	NR_FDD_FR1_B				-119.5
	NR_TDD_FR1_C				-119
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118
	NR_FDD_FR1_F				-117.5
	NR_FDD_FR1_G				-117
	NR_FDD_FR1_H				-116.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-81.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
I _o Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_FR1_B				-86.78
	NR_TDD_FR1_C				-86.28
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28
	NR_FDD_FR1_F				-84.78
	NR_FDD_FR1_G				-84.28
	NR_FDD_FR1_H				-83.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3	dBm/38.16 MHz	-50.19	-81.19
	NR_FDD_FR1_B				-80.69
	NR_TDD_FR1_C				-80.19
	NR_FDD_FR1_D, NR_TDD_FR1_D				-79.69
	NR_FDD_FR1_E, NR_TDD_FR1_E				-79.19
	NR_FDD_FR1_F				-78.69

	NR_FDD_FR1_G				-78.19
	NR_FDD_FR1_H				-77.69
$\hat{E}_s / N_{oc}$	1~3	dB	10		-3
Propagation condition	1~3		AWGN		AWGN
Antenna configuration	1~3		1x2		1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.					

A.6.7.4.1.3 Test Requirements

The L1-RSRP measurement accuracy for SSB resource reported by UE in L1-RSRP report (SSB#0 or SSB#1) of Cell 2 shall fulfil the requirements in clauses 10.1.19.1.

A.6.7.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off

A.6.7.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.5.3 and clause 10.1.19.2 for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.6.7.4.2.1-1.

Table A.6.7.4.2.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.4.2.2 Test parameters

In this set of test cases there are one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.7.4.2.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.6.7.4.2.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.6.7.4.2.2-1: FR1 CSI-RS based L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~3		freq1	freq1
Duplex mode	1		FDD	FDD
	2		TDD	TDD
	3		TDD	TDD
TDD Configuration	1		N/A	N/A
	2		TDDConf.1.1	TDDConf.1.1

BW _{channel}	3	MHz	TDDConf.2.1	TDDConf.2.1
	1		10: N _{RB,c} = 52	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52	10: N _{RB,c} = 52
	3		40: N _{RB,c} = 106	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 FDD
	2		SR.1.1 TDD	SR.1.1 TDD
	3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 FDD
	2		CR.1.1 TDD	CR.1.1 TDD
	3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 FDD
	2		CCR.1.1 TDD	CCR.1.1 TDD
	3		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1	SSB.3 FR1
	2		SSB.3 FR1	SSB.3 FR1
	3		SSB.4 FR1	SSB.4 FR1
OCNG Patterns	1~3		OP.1	OP.1
TRS configuration	1		TRS.1.1 FDD	TRS.1.1 FDD
	2		TRS.1.1 TDD	TRS.1.1 TDD
	3		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTc configuration	1~3		SMTc.1	SMTc.1
CSI-RS	1		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
	2		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
	3		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
reportConfigType	1~3		periodic	periodic
reportQuantity	1~3		cri-RSRP	cri-RSRP
Number of reported RS	1~3		2	2
L1-RSRP reporting period	1~3		slot80	slot80
EPRE ratio of PSS to SSS	1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/15kHz	-94.65
	NR_FDD_FR1_B			-116.5
	NR_TDD_FR1_C			-116
	NR_FDD_FR1_D, NR_TDD_FR1_D			-115.5

	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/CSI-RS SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s/I_{ot}$		1~3	dB	10	-3
CSI-RS RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/CSI-RS SCS	-84.65	-120
	NR_FDD_FR1_B				-119.5
	NR_TDD_FR1_C				-119
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118
	NR_FDD_FR1_F				-117.5
	NR_FDD_FR1_G				-117
	NR_FDD_FR1_H				-116.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-81.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
I_o Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_FR1_B				-86.78
	NR_TDD_FR1_C				-86.28

NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78
NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28
NR_FDD_FR1_F				-84.78
NR_FDD_FR1_G				-84.28
NR_FDD_FR1_H				-83.78
NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3	dBm/38.16 MHz	-50.19	-81.19
NR_FDD_FR1_B				-80.69
NR_TDD_FR1_C				-80.19
NR_FDD_FR1_D, NR_TDD_FR1_D				-79.69
NR_FDD_FR1_E, NR_TDD_FR1_E				-79.19
NR_FDD_FR1_F				-78.69
NR_FDD_FR1_G				-78.19
NR_FDD_FR1_H				-77.69
$\hat{E}_s/N_{oc}$	1~3	dB	10	-3
Propagation condition	1~3		AWGN	AWGN
Antenna configuration	1~3		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.				

A.6.7.4.2.3 Test Requirements

The L1-RSRP measurement accuracy for CSI-RS resource reported by UE in L1-RSRP report (CSI-RS#0 or CSI-RS#1) of Cell 1 shall fulfil the requirements in clause 10.1.19.2.

A.6.7.5 E-UTRAN RSRP

A.6.7.5.1 SA: inter-RAT measurement accuracy with FR1 serving cell

A.6.7.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.2.2 for SA inter-RAT E-UTRAN RSRP measurements.

A.6.7.5.1.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.6.7.5.1.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RSRP are tested by using the parameters in A.6.7.5.1.2-2 and A.6.7.5.1.2-3.

Table A.6.7.5.1.2-1: Inter-RAT E-UTRAN RSRP supported test configurations with FR1 serving cell

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD

2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.5.1.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RSRP test parameters

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		N/A
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
BW _{channel}	Config 1, 4	MHz	10: N _{RB,c} = 52 (FDD)
	Config 2, 5		10: N _{RB,c} = 52 (TDD)
	Config 3, 6		40: N _{RB,c} = 106 (TDD)
Gap pattern Id			0
PDSCH reference measurement channel	Config 1, 4		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD
	Config 3, 6		SR.2.1 TDD
RMSI CORSET reference channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORSET reference channel	Config 1, 4		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
BWP configurations	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
OCNG pattern ^{Note1}			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1, 2, 4, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N _{oc} ^{Note2}		dBm/15 kHz	-104
N _{oc} ^{Note2}	Config 1, 2, 4, 5	dBm/SCS	-104
	Config 3, 6		-101
Ê _s /N _{oc}		dB	17
Ê _s /I _{ot} ^{Note3}		dB	17
SS-RSRP ^{Note3}		dBm/SCS	-87

SSB_RP ^{Note3}	Config 3, 6	dBm/SCS	-84
	Config 1, 2, 4, 5		-87
	Config 3, 6		-84
I _o ^{Note3}	Config 1, 2, 4, 5	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/38.16 MHz	-52.87
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.6.7.5.1.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RSRP test parameters

Parameter		Unit	Cell 2	
			Test 1	Test 2
E-UTRA RF channel number			1	
Duplex mode	Config 1, 2, 3		FDD	
	Config 4, 5, 6		TDD	
TDD special subframe configuration ^{Note1}	Config 1, 2, 3		N/A	
	Config 4, 5, 6		6	
TDD uplink-downlink configuration ^{Note1}	Config 1, 2, 3		N/A	
	Config 4, 5, 6		1	
BW _{channel}		MHz	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}			-	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}	Config 1, 2, 3		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
	Config 4, 5, 6		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}	Config 1, 2, 3		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD	
	Config 4, 5, 6		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD	
PBCH_RA		dB	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				

OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	Bands FDD_A ^{Note 9} , TDD_A	dBm/15kHz	-91.65	-117
	Bands FDD_B1, FDD_B2 ^{Note 10}			-116.5
	Bands FDD_C, TDD_C			-116
	Bands FDD_D			-115.5
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E			-115
	Bands FDD_G ^{Note 8}			-114
	Bands FDD_H			-113.5
$\hat{E}_s/N_{oc}$		dB	10	-4
$\hat{E}_s/I_{ot}$ ^{Note5}		dB	10	-4
RSRP ^{Note5}	Bands FDD_A ^{Note 9} , TDD_A	dBm/15kHz	-81.65	-121
	Bands FDD_B1, FDD_B2 ^{Note 10}			-120.5
	Bands FDD_C, TDD_C			-120
	Bands FDD_D			-119.5
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E			-119
	Bands FDD_G ^{Note 8}			-118
	Bands FDD_H			-117.5
SCH_RP ^{Note5}	Bands FDD_A ^{Note 9} , TDD_A	dBm/15kHz	-81.65	-121
	Bands FDD_B1, FDD_B2 ^{Note 10}			-120.5
	Bands FDD_C, TDD_C			-120
	Bands FDD_D			-119.5
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E			-119
	Bands FDD_G ^{Note 8}			-118
	Bands FDD_H			-117.5
I _o ^{Note5}	Bands FDD_A ^{Note 9} , TDD_A	dBm/Ch BW	-53.45 + 10log(N _{RB,c} /50)	-87.76 + 10log(N _{RB,c} /50)
	Bands FDD_B1, FDD_B2 ^{Note 10}			-87.26 + 10log(N _{RB,c} /50)
	Bands FDD_C, TDD_C			-86.76 + 10log(N _{RB,c} /50)
	Bands FDD_D			-86.26 + 10log(N _{RB,c} /50)
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E			-85.76 + 10log(N _{RB,c} /50)
	Bands FDD_G ^{Note 8}			-84.76 + 10log(N _{RB,c} /50)
	Bands FDD_H			-84.26 + 10log(N _{RB,c} /50)
Propagation Condition			AWGN	
Antenna Configuration and Correlation Matrix			1x2	
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].			
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.			
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 5:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 6:	E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].			

Note 7:	For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.
Note 8:	Except Band 29.
Note 9:	Except Band 32, Band 75 and Band 76.
Note 10:	For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.

A.6.7.5.1.3 Test Requirements

The SA inter-RAT E-UTRAN RSRP measurement accuracy for cell 2 shall fulfil absolute requirement in clause 10.2.2.

A.6.7.6 E-UTRAN RSRQ

A.6.7.6.1 SA: inter-RAT measurement accuracy with FR1 serving cell

A.6.7.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.2.3 for SA inter-RAT E-UTRAN RSRQ measurements.

A.6.7.6.1.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.6.7.6.1.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RSRQ are tested by using the parameters in A.6.7.6.1.2-2 and A.6.7.6.1.2-3.

Table A.6.7.6.1.2-1: Inter-RAT E-UTRAN RSRQ supported test configurations with FR1 serving cell

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.6.1.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RSRQ test parameters

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		N/A
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
BW _{channel}	Config 1, 4	MHz	10: N _{RB,c} = 52 (FDD)
	Config 2, 5		10: N _{RB,c} = 52 (TDD)
	Config 3, 6		40: N _{RB,c} = 106 (TDD)
Gap pattern Id			0
PDSCH reference measurement channel	Config 1, 4		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD
	Config 3, 6		SR.2.1 TDD
RMSI CORSET reference channel			CR.1.1 FDD

Dedicated CORSET reference channel	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
	Config 1, 4		CCR.1.1 FDD
CSI-RS for tracking	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
BWP configurations	Config 3, 6		TRS.1.2 TDD
	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
OCNG pattern ^{Note1}	Dedicated UL BWP		ULBWP.1.1
SMTC configuration			OP.1
SSB configuration	Config 1, 2, 4, 5		SMTC.1
	Config 3, 6		SSB.1 FR1
EPRE ratio of PSS to SSS		dB	SSB.2 FR1
EPRE ratio of PBCH_DMRS to SSS			0
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc} ^{Note2}		dBm/15 kHz	-104
N_{oc} ^{Note2}	Config 1, 2, 4, 5	dBm/SCS	-104
	Config 3, 6		-101
$\hat{E}_s/N_{oc}$		dB	dB
$\hat{E}_s/I_{ot}$ ^{Note3}		dB	dB
SS-RSRQ ^{Note3}	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
SSB_RP ^{Note3}	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
I_o ^{Note3}	Config 1, 2, 4, 5	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/38.16 MHz	-52.87
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: $\hat{E}_s/I_{ot}$, SS-RSRQ, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.6.7.6.1.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RSRQ test parameters

Parameter		Unit	Cell 2		
			Test 1	Test 2	Test 3
E-UTRA RF channel number			1		
Duplex mode	Config 1, 2, 3		FDD		
	Config 4, 5, 6		TDD		
TDD special subframe configuration ^{Note1}	Config 1, 2, 3		N/A		

TDD uplink-downlink configuration ^{Note1}	Config 4, 5, 6		6		
	Config 1, 2, 3		N/A		
	Config 4, 5, 6		1		
BW _{channel}		MHz	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100		
PDSCH parameters: DL Reference Measurement Channel ^{Note2}			-		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}	Config 1, 2, 3		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
	Config 4, 5, 6		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns ^{Note2}	Config 1, 2, 3		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD		
	Config 4, 5, 6		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD		
PBCH_RA		dB	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note3}					
OCNG_RB ^{Note3}					
N _{oc} ^{Note4}	Bands FDD_A ^{Note 9} , TDD_A	dBm/15kHz	-83	-104.70	-119.5
	Bands FDD_B1, FDD_B2 ^{Note 10}				-119
	Bands FDD_C, TDD_C				-118.5
	Bands FDD_D				-118
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E				-117.5
	Bands FDD_G ^{Note 8}				-116.5
	Bands FDD_H				-116
$\bar{E}_s/N_{oc}$		dB	-1.75	-4.0	-4.0
$\bar{E}_s/I_{ot}$ ^{Note5}		dB	-1.75	-4.0	-4.0
RSRP ^{Note5}	Bands FDD_A ^{Note 9} , TDD_A	dBm/15kHz	-84.75	-108.70	-123.5
	Bands FDD_B1, FDD_B2 ^{Note 10}				-123
	Bands FDD_C, TDD_C				-122.5
	Bands FDD_D				-122
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E				-121.5
	Bands FDD_G ^{Note 8}				-120.5
	Bands FDD_H				-120
RSRQ ^{Note5}	Bands FDD_A ^{Note 9} , TDD_A	dB	-14.76	-16.25	-16.25

	Bands FDD_B1, FDD_B2 Note 10				
	Bands FDD_C, TDD_C				
	Bands FDD_D				
	Bands FDD_E, FDD_F Note 7 , TDD_E				
	Bands FDD_G Note 8				
	Bands FDD_H				
Io Note5	Bands FDD_A Note 9 , TDD_A	dBm/Ch BW	-53 + 10log(N _{RB,c} /50)	-75.46 + 10log(N _{RB,c} /50)	-90.26 + 10log(N _{RB,c} /50)
	Bands FDD_B1, FDD_B2 Note 10				-89.76 + 10log(N _{RB,c} /50)
	Bands FDD_C, TDD_C				-89.26 + 10log(N _{RB,c} /50)
	Bands FDD_D				-88.76 + 10log(N _{RB,c} /50)
	Bands FDD_E, FDD_F Note 7 , TDD_E				-88.26 + 10log(N _{RB,c} /50)
	Bands FDD_G Note 8				-87.26 + 10log(N _{RB,c} /50)
	Bands FDD_H				-86.76 + 10log(N _{RB,c} /50)
Propagation Condition			AWGN		
Antenna Configuration and Correlation Matrix			1x2		
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5:	Ê _s /I _{ot} , RSRP, RSRQ and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6:	E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].				
Note 7:	For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.				
Note 8:	Except Band 29.				
Note 9:	Except Band 32, Band 75 and Band 76.				
Note 10:	For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.				

A.6.7.6.1.3 Test Requirements

The SA inter-RAT E-UTRAN RSRQ measurement accuracy for cell 2 shall fulfil absolute requirement in clause 10.2.3.

A.6.7.7 E-UTRAN RS-SINR

A.6.7.7.1 SA: inter-RAT measurement accuracy with FR1 serving cell

A.6.7.7.1.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.2.4 for SA inter-RAT E-UTRAN RS-SINR measurements.

A.6.7.7.1.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.6.7.7.1.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RS-SINR are tested by using the parameters in A.6.7.7.1.2-2 and A.6.7.7.1.2-3.

Table A.6.7.7.1.2-1: Inter-RAT E-UTRAN RS-SINR supported test configurations with FR1 serving cell

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.7.1.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RS-SINR test parameters

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
TDD Configuration	Config 1, 4		N/A
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
BW _{channel}	Config 1, 4	MHz	10: N _{RB,c} = 52 (FDD)
	Config 2, 5		10: N _{RB,c} = 52 (TDD)
	Config 3, 6		40: N _{RB,c} = 106 (TDD)
Gap pattern Id			0
PDSCH reference measurement channel	Config 1, 4		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD
	Config 3, 6		SR.2.1 TDD
RMSI CORSET reference channel	Config 1, 4		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORSET reference channel	Config 1, 4		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
BWP configurations	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1

	Dedicated UL BWP		ULBWP.1.1
OCNG pattern ^{Note1}			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1, 2, 4, 5		SSB.1 FR1
	Config 3, 6		SSB.2 FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc} ^{Note2}		dBm/15 kHz	-104
N_{oc} ^{Note2}	Config 1, 2, 4, 5	dBm/SCS	-104
	Config 3, 6		-101
$\hat{E}_s/N_{oc}$		dB	17
$\hat{E}_s/I_{ot}$ ^{Note3}		dB	17
SS-RS-SINR ^{Note3}	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
SSB_RP ^{Note3}	Config 1, 2, 4, 5	dBm/SCS	-87
	Config 3, 6		-84
I_o ^{Note3}	Config 1, 2, 4, 5	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/38.16 MHz	-52.87
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: $\hat{E}_s/I_{ot}$, SS-RS-SINR, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.6.7.7.1.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RS-SINR test parameters

Parameter		Unit	Cell 2		
			Test 1	Test 2	Test 3
E-UTRA RF channel number			1		
Duplex mode	Config 1, 2, 3		FDD		
	Config 4, 5, 6		TDD		
TDD special subframe configuration ^{Note1}	Config 1, 2, 3		N/A		
	Config 4, 5, 6		6		
TDD uplink-downlink configuration ^{Note1}	Config 1, 2, 3		N/A		
	Config 4, 5, 6		1		
BW _{channel}		MHz	5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$		
PDSCH parameters: DL Reference Measurement Channel ^{Note2}			-		
PCFICH/PDCCH/PHICH parameters:	Config 1, 2, 3		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		

DL Reference Measurement Channel ^{Note2}					
	Config 4, 5, 6		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns ^{Note2}	Config 1, 2, 3		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD		
	Config 4, 5, 6		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD		
PBCH_RA		dB	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note3}					
OCNG_RB ^{Note3}					
N _{oc} ^{Note4}	Bands FDD_A ^{Note 9} , TDD_A	dBm/15kHz	-88	-108.50	-119.5
	Bands FDD_B1, FDD_B2 ^{Note 10}				-119
	Bands FDD_C, TDD_C				-118.5
	Bands FDD_D				-118
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E				-117.5
	Bands FDD_G ^{Note 8}				-116.5
	Bands FDD_H				-116
CRS $\bar{E}_s/N_{oc1}$		dB	-1.75	20.0	-4.0
CRS $\bar{E}_s/I_{ot}$ ^{Note5}		dB	-1.75	20.0	-4.0
RSRP ^{Note5}	Bands FDD_A ^{Note 9} , TDD_A	dBm/15kHz	-89.75	-88.50	-123.5
	Bands FDD_B1, FDD_B2 ^{Note 10}				-123
	Bands FDD_C, TDD_C				-122.5
	Bands FDD_D				-122
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E				-121.5
	Bands FDD_G ^{Note 8}				-120.5
	Bands FDD_H				-120
RS-SINR ^{Note5}	Bands FDD_A ^{Note 9} , TDD_A	dB	-1.75	20	-4.0
	Bands FDD_B1, FDD_B2 ^{Note 10}				
	Bands FDD_C, TDD_C				
	Bands FDD_D				
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E				
	Bands FDD_G ^{Note 8}				
	Bands FDD_H				
I ₀ ^{Note5}	Bands FDD_A ^{Note 9} , TDD_A	dBm/Ch BW	-53.79 + 10log(N _{RB,c} /50)	-60.56 + 10log(N _{RB,c} /50)	-93.48 + 10log(N _{RB,c} /50)

	Bands FDD_B1, FDD_B2 Note 10				-92.98 + 10log(N _{RB,c} /50)
	Bands FDD_C, TDD_C				-92.48 + 10log(N _{RB,c} /50)
	Bands FDD_D				-91.98 + 10log(N _{RB,c} /50)
	Bands FDD_E, FDD_F Note 7 , TDD_E				-91.48 + 10log(N _{RB,c} /50)
	Bands FDD_G Note 8				-90.48 + 10log(N _{RB,c} /50)
	Bands FDD_H				-89.98 + 10log(N _{RB,c} /50)
Propagation Condition			AWGN		
Antenna Configuration and Correlation Matrix			1x2		
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 4a:	Void.				
Note 5:	CRS Ê _s /I _{ot} , RSRP, RS-SINR and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6:	E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].				
Note 7:	For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.				
Note 8:	Except Band 29.				
Note 9:	Except Band 32, Band 75 and Band 76.				
Note 10:	For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.				

A.6.7.7.1.3 Test Requirements

The SA inter-RAT E-UTRAN RS-SINR measurement accuracy for cell 2 shall fulfil absolute requirement in clause 10.2.4.

A.6.7.8 CLI measurements

A.6.7.8.1 SA SRS-RSRP measurement accuracy with FR1 serving cell

A.6.7.8.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SRS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.22.1.1 with the testing configurations for NR cells in Table A.6.7.8.1.1-1.

Table A.6.7.8.1.1-1: Applicable NR configurations for FR1 SRS-RSRP accuracy test

Config	Description
1	15kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
2	30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.8.1.2 Test parameters

In this set of test cases there is one cell in the test, FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.7.8.1.2-1 below. The test parameter for the (virtual) neighbor cell UE transmitting SRS are given in Table A.6.7.8.1.2-2.

Before the test UE is configured to perform SRS-RSRP measurement. During the test, the test system transmits SRS resources for measurement in the DL slots according to the SRS configuration in Table A.6.7.8.1.2-3. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 1 data symbol before SRS to be transmitted.

Table A.6.7.8.1.2-1: FR1 test parameters for SRS-RSRP accuracy for PCell

Parameter	Config	Unit	Test 1	Test 2	Test 3
SSB GSCN	1~2		freq1	freq1	freq1
Duplex mode	1~2		TDD	TDD	TDD
TDD configuration	1		TDDConf.1.1	TDDConf.1.1	TDDConf.1.1
	2		TDDConf.2.1	TDDConf.2.1	TDDConf.2.1
BW _{channel}	1	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52	10: N _{RB,c} = 52
	2		40: N _{RB,c} = 106	40: N _{RB,c} = 106	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 TDD	SR.1.1 TDD	SR.1.1 TDD
	2		SR.2.1 TDD	SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 TDD	CR.1.1 TDD	CR.1.1 TDD
	2		CR.2.1 TDD	CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 TDD	CCR.1.1 TDD	CCR.1.1 TDD
	2		CCR.2.1 TDD	CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	2		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
OCNG Patterns	1~2		OP.1	OP.1	OP.1
TRS configuration	1		TRS.1.1 TDD	TRS.1.1 TDD	TRS.1.1 TDD
	2		TRS.1.2 TDD	TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTc configuration	1~2		SMTc.1	SMTc.1	SMTc.1
Time offset between DL from serving cell and SRS from test system	1~2	μs	17.67	17.67	17.67
EPRE ratio of PSS to SSS	1~2	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					

N_{oc} Note2	NR_TDD_FR1_A NOTE 3	1	dBm/15kHz	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 5	2		Not applicable ^{Note 4}	-91	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
N_{oc} Note2	NR_TDD_FR1_A NOTE 3	1	dBm/SRS SCS	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 3	2		Not applicable ^{Note 4}	-88	-111
	NR_TDD_FR1_C					-110
	NR_TDD_FR1_D					-109.5
	NR_TDD_FR1_E					-109
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification						
Note 4: Test 1 is not used when testing with 30kHz SSB SCS						

Table A.6.7.8.1.2-2: FR1 test parameters for SRS-RSRP accuracy for neighbour cell UE

	Parameter	Config	Unit	Test 1	Test 2	Test 3
N_{oc} Note2	NR_TDD_FR1_A NOTE 5	1	dBm/15kHz	-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 5	2		Not applicable ^{Note 6}	-91	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
N_{oc} Note2	NR_TDD_FR1_E		dBm/SRS SCS			-112
	NR_TDD_FR1_A NOTE 5	1		-106	-88	-114
	NR_TDD_FR1_C					-113
	NR_TDD_FR1_D					-112.5
	NR_TDD_FR1_E					-112
	NR_TDD_FR1_A NOTE 5	2		Not applicable ^{Note 6}	-88	-111
	NR_TDD_FR1_C					-110
	NR_TDD_FR1_D					-109.5
	NR_TDD_FR1_E					-109
$\hat{E}_s/I_{ot}$ on SRS		1~2	dB	1	1	1

SRS RSRP Note3	NR_TDD_FR1_A NOTE 5	1	dBm/SRS SCS	-105	-87	-113
	NR_TDD_FR1_C					-112
	NR_TDD_FR1_D					-111.5
	NR_TDD_FR1_E					-111
	NR_TDD_FR1_A NOTE 5	2		Not applicable ^{Note 6}	-87	-110
	NR_TDD_FR1_C					-109
	NR_TDD_FR1_D					-108.5
NR_TDD_FR1_E	-108					
Io ^{Note3}	NR_TDD_FR1_A NOTE 5	1	dBm/9.36 MHz	-74.51	-56.51	-82.51
	NR_TDD_FR1_C					-81.51
	NR_TDD_FR1_D					-81.01
	NR_TDD_FR1_E					-79.51
	NR_TDD_FR1_A NOTE 5	2	dBm/38.16 MHz	Not applicable ^{Note 6}	-53.42	-76.42
	NR_TDD_FR1_C					-75.42
	NR_TDD_FR1_D					-74.92
	NR_TDD_FR1_E					-74.42
$\hat{E}_s / N_{oc}$ on SRS		1~2	dB	1	1	1
Propagation condition		1~2		AWGN	AWGN	AWGN
Antenna configuration		1~2		1x2	1x2	1x2
SRS configuration		1		SRSCConf.1	SRSCConf.1	SRSCConf.1
		2		SRSCConf.2	SRSCConf.2	SRSCConf.2
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of the test.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over						
subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification						
Note 6: Test 1 is not used when testing with 30kHz SSB SCS						

Table A.6.7.8.1.2-3: SRS configuration parameters for FR1 SRS-RSRP accuracy

	Field	SRSCConf.1	SRSCConf.2
SRS-ResourceSet	srs-ResourceSetId	0	0
	srs-ResourceIdList	0	0
	resourceType	Periodic	Periodic
	Usage	Codebook	Codebook
SRS-Resource	SRS-ResourceId	0	0
	nrofSRS-Ports	Port1	Port1
	transmissionComb	n2	n2
	combOffset-n2	0	0
	cyclicShift-n2	0	0
	resourceMapping startPosition	0	0
	resourceMapping nrofSymbols	n1	n1
	resourceMapping repetitionFactor	n1	n1
	freqDomainPosition	0	0

freqDomainShift	0	0
freqHopping c-SRS	12	12
freqHopping b-SRS	0	0
freqHopping b-hop	0	0
groupOrSequenceHopping	Neither	Neither
resourceType	Periodic	Periodic
periodicityAndOffset-p	sl20, 9	sl40, 19
sequenceId	0	0

A.6.7.8.1.3 Test Requirements

The SRS-RSRP measurement accuracy shall fulfil the requirements in clauses 10.1.22.1.1.

A.6.7.8.2 SA CLI-RSSI measurement accuracy with FR1 serving cell

A.6.7.8.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CLI-RSSI measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.22.2.1 with the testing configurations for NR cells in Table A.6.7.8.2.1-1.

Table A.6.7.8.2.1-1: Applicable NR configurations for FR1 CLI-RSSI accuracy test

Config	Description
1	NR 15 kHz SRS SCS, 10 MHz bandwidth, TDD duplex mode
2	NR 30kHz SRS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.8.2.2 Test parameters

In this set of test cases there is one cell in the test, the FR1 PSCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.7.8.2.2-1 below.

Before the test UE is configured to perform CLI-RSSI measurement. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI resource and on 1 data symbol before. The CLI-RSSI measurement resource configuration is in Table A.6.7.8.2.2-2.

Table A.6.7.8.2.2-1: FR1 test parameters for CLI-RSSI accuracy

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD configuration	1		TDDConf.1.1
	2		TDDConf.2.1
BW _{channel}	1	MHz	10: N _{RB,c} = 52
	2		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 TDD
	2		SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 TDD
	2		CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 TDD

	2		CCR.2.1 TDD
SSB configuration	1		SSB.1 FR1
	2		SSB.2 FR1
OCNG Patterns ^{Note6}	1~2		OP.1
TRS configuration	1		TRS.1.1 TDD
	2		TRS.1.2 TDD
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~2		SMTC.1
Time offset between DL from serving cell and OCNG from test system	1~2	μs	17.67
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N_{oc} on CLI-RSSI measurement resource ^{Note2}	1	dBm/15kHz	-106
	2		-106
N_{oc} on CLI-RSSI measurement resource ^{Note2}	1	dBm/ BWP SCS	-106
	2		-103
$\hat{E}_s/I_{ot}$ on CLI-RSSI measurement resource	1~2	dB	-Infinity
RSRP on CLI-RSSI measurement resource ^{Note3}	1~2	dBm/ BWP SCS	-Infinity
Io on CLI-RSSI measurement resource ^{Note3}	1	dBm/9.36 MHz	-78.05
	2	dBm/38.16 MHz	-71.96
Io on CLI-RSSI measurement resource ^{Note3}	1	dBm/1.08 MHz	-87.43
	2		-87.44
$\hat{E}_s/N_{oc}$ on CLI-RSSI measurement resource	1~2	dB	-Infinity
Propagation condition	1~2		AWGN
Antenna configuration	1~2		1x2

Note 1:	OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 6:	OCNG is not transmitted in the CLI-RSSI measurement resources.

Table A.6.7.8.2.2-2: CLI-RSSI measurement resource configuration for FR1 CLI-RSSI accuracy

	Field	Config	SRSSConf.1
CLI-RSSI measurement resource	rssi-ResourceId	1~2	0
	rssi-SCS	1	15kHz
		2	30kHz
	startPRB	1~2	0
	nrofPRBs	1	52
		2	106
	startPosition	1~2	3
	nrofSymbols	1~2	11
	rssi-PeriodicityAndOffset	1	sl20, 9
		2	sl40, 19

A.6.7.8.2.3 Test Requirements

The CLI-RSSI measurement accuracy shall fulfil the requirements in clauses 10.1.22.2.1.

A.6.7.9 L1-SINR measurement for beam reporting

A.6.7.9.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off

A.6.7.9.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.8.4.1 and clause 10.1.27.1 for L1-SINR measurements based on CSI-RS with the testing configurations for NR cells in Table A.6.7.9.1.1-1.

Table A.6.7.9.1.1-1: Applicable NR configurations for FR1 L1-SINR test with CSI-RS based CMR and no dedicated IMR configured

Config	Description
1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.9.1.2 Test parameters

In this set of test cases there are one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.7.9.1.2-1 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.6.7.9.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.6.7.9.1.2-1: FR1 CSI-RS based L1-SINR test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~3		freq1	freq1
Duplex mode	1		FDD	FDD
	2		TDD	TDD
	3		TDD	TDD
TDD Configuration	1		N/A	N/A
	2		TDDConf.1.1	TDDConf.1.1
	3		TDDConf.2.1	TDDConf.2.1
BW _{channel}	1	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52	10: N _{RB,c} = 52
	3		40: N _{RB,c} = 106	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 FDD
	2		SR.1.1 TDD	SR.1.1 TDD
	3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 FDD
	2		CR.1.1 TDD	CR.1.1 TDD
	3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 FDD
	2		CCR.1.1 TDD	CCR.1.1 TDD
	3		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1		SSB.1 FR1	SSB.1 FR1
	2		SSB.1 FR1	SSB.1 FR1
	3		SSB.2 FR1	SSB.2 FR1
OCNG Patterns	1~3		OP.1	OP.1
TRS configuration	1		TRS.1.1 FDD	TRS.1.1 FDD
	2		TRS.1.1 TDD	TRS.1.1 TDD
	3		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1	SMTC.1
CSI-RS	1		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
	2		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
	3		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
reportConfigType	1~3		periodic	periodic
reportQuantity-r16	1~3		cri-SINR-r16	cri-SINR-r16
nrofReportedRS	1~3		2	2
L1-SINR reporting period	1~3		slot80	slot80
EPRE ratio of PSS to SSS	1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				

EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/15kHz	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/CSI-RS SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s/I_{ot}$		1~3	dB	10	-3
CSI-RS RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/CSI-RS SCS	-84.65	-120
	NR_FDD_FR1_B				-119.5
	NR_TDD_FR1_C				-119
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118
	NR_FDD_FR1_F				-117.5
	NR_FDD_FR1_G				-117
	NR_FDD_FR1_H				-116.5

	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-81.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
I _o Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_FR1_B				-86.78
	NR_TDD_FR1_C				-86.28
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28
	NR_FDD_FR1_F				-84.78
	NR_FDD_FR1_G				-84.28
	NR_FDD_FR1_H				-83.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3	dBm/38.16 MHz	-50.19	-81.19
	NR_FDD_FR1_B				-80.69
	NR_TDD_FR1_C				-80.19
	NR_FDD_FR1_D, NR_TDD_FR1_D				-79.69
	NR_FDD_FR1_E, NR_TDD_FR1_E				-79.19
	NR_FDD_FR1_F				-78.69
	NR_FDD_FR1_G				-78.19
	NR_FDD_FR1_H				-77.69
$\hat{E}_s/N_{oc}$		1~3	dB	10	-3
Propagation condition		1~3		AWGN	AWGN
Antenna configuration		1~3		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.					

A.6.7.9.1.3 Test Requirements

The L1-SINR measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 1 shall fulfil the requirements in clause 10.1.27.1.

A.6.7.9.2 L1-SINR measurement with SSB based CMR and dedicated IMR

A.6.7.9.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.8.4.2 and clause 10.1.27.2 for L1-SINR measurements with SSB based CMR and dedicated CSI-RS based IMR, with the testing configurations for NR cells in Table A.6.7.9.2.1-1.

Table A.6.7.9.2.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with SSB based CMR and CSI-RS based IMR

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.9.2.2 Test parameters

In this set of test cases there one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.7.9.2.2-1 below. The absolute accuracy of L1-SINR measurements are tested by using the parameters in Table A.6.7.9.2.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources and one CSI-RS resource set with two CSI-RS resource. UE is configured to perform RLM and BFD measurement based on the SSB resources 0 and 1. UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-RS resources as IMR.

Table A.6.7.9.2.2-1: FR1 SSB based L1-SINR test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~3		freq1	freq1
Duplex mode	1		FDD	FDD
	2		TDD	TDD
	3		TDD	TDD
TDD Configuration	1		N/A	N/A
	2		TDDConf.1.1	TDDConf.1.1
	3		TDDConf.2.1	TDDConf.2.1
BW _{channel}	1	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52	10: N _{RB,c} = 52
	3		40: N _{RB,c} = 106	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 FDD
	2		SR.1.1 TDD	SR.1.1 TDD
	3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 FDD
	2		CR.1.1 TDD	CR.1.1 TDD
	3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 FDD
	2		CCR.1.1 TDD	CCR.1.1 TDD
	3		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1		SSB.3 FR1	SSB.3 FR1
	2		SSB.3 FR1	SSB.3 FR1
	3		SSB.4 FR1	SSB.4 FR1
CSI-RS configuration	1		CSI-RS 1.1A FDD	CSI-RS 1.1A FDD
	2		CSI-RS 1.1A TDD	CSI-RS 1.1A TDD

		3		CSI-RS 2.1A TDD	CSI-RS 2.1A TDD
OCNG Patterns		1~3		OP.1	OP.1
Initial BWP Configuration		1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
TRS configuration		1		TRS.1.1 FDD	TRS.1.1 FDD
		2		TRS.1.1 TDD	TRS.1.1 TDD
		3		TRS.1.2 TDD	TRS.1.2 TDD
Dedicated BWP configuration		1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTTC configuration		1~3		SMTTC.1	SMTTC.1
reportConfigType		1~3		periodic	periodic
reportQuantity-r16		1~3		ssb-Index-SINR-r16	ssb-Index-SINR-r16
Number of reported RS		1~3		2	2
L1-SINR reporting period		1~3		slot80	slot80
EPRE ratio of PSS to SSS		1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}				
	NR_FDD_FR1_B	-116.5			
	NR_TDD_FR1_C	-116			
	NR_FDD_FR1_D, NR_TDD_FR1_D	-115.5			
	NR_FDD_FR1_E, NR_TDD_FR1_E	-115			
	NR_FDD_FR1_F	-114.5			
	NR_FDD_FR1_G	-114			
	NR_FDD_FR1_H	-113.5			
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1,2	dBm/SSB SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	3		-91.65	-114

	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s/I_{ot}$		1~3	dB	10	0
$\hat{E}_s/N_{oc}$		1~6	dB	10	0
SSB RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/SSB SCS	-84.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-81.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
CSI-RS RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/CSI-RS SCS	-84.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-81.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-113
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5

	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
I _o Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/9.36 MHz	-56.28	-86.04
	NR_FDD_FR1_B				-85.54
	NR_TDD_FR1_C				-85.04
	NR_FDD_FR1_D, NR_TDD_FR1_D				-84.54
	NR_FDD_FR1_E, NR_TDD_FR1_E				-84.04
	NR_FDD_FR1_F				-83.54
	NR_FDD_FR1_G				-83.04
	NR_FDD_FR1_H				-82.54
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3	dBm/38.16 MHz	-50.19	-79.94
	NR_FDD_FR1_B				-79.44
	NR_TDD_FR1_C				-78.94
	NR_FDD_FR1_D, NR_TDD_FR1_D				-78.44
	NR_FDD_FR1_E, NR_TDD_FR1_E				-77.94
	NR_FDD_FR1_F				-77.44
	NR_FDD_FR1_G				-76.94
	NR_FDD_FR1_H				-76.44
Propagation condition		1~3		AWGN	AWGN
Antenna configuration		1~3		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.					

A.6.7.9.2.3 Test Requirements

The L1-SINR measurement accuracy for SSB#0+CSI-RS#0 and SSB#1+CSI-RS#1 of Cell 1 shall fulfil the requirements in clauses 10.1.27.2.

A.6.7.9.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR

A.6.7.9.3.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will partly verify the requirements in Clauses 9.8.4.3 and clause 10.1.27.3 for L1-SINR measurements based on CSI-RS as CMR and CSI-IM as IMR with the testing configurations for NR cells in Table A.6.7.9.3.1-1.

Table A.6.7.9.3.1-1: Applicable NR configurations for FR1 L1-SINR measurement test with CSI-RS based CMR and CSI-IM based IMR

Config	Description
1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.9.3.2 Test parameters

In this set of test cases there are one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.6.7.9.3.2-1 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.6.7.9.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources and one CSI-IM resource set with two CSI-IM resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB. UE is configured to perform L1-SINR measurement based on the configured CSI-RS as CMR and CSI-IM as IMR.

Table A.6.7.9.3.2-1: FR2 L1-SINR measurement test with CSI-RS based CMR and CSI-IM based IMR

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~3		freq1	freq1
Duplex mode	1		FDD	FDD
	2		TDD	TDD
	3		TDD	TDD
TDD Configuration	1		N/A	N/A
	2		TDDConf.1.1	TDDConf.1.1
	3		TDDConf.2.1	TDDConf.2.1
BW _{channel}	1	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52	10: N _{RB,c} = 52
	3		40: N _{RB,c} = 106	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 FDD
	2		SR.1.1 TDD	SR.1.1 TDD
	3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 FDD
	2		CR.1.1 TDD	CR.1.1 TDD
	3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 FDD
	2		CCR.1.1 TDD	CCR.1.1 TDD
	3		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1		SSB.1 FR1	SSB.1 FR1
	2		SSB.1 FR1	SSB.1 FR1
	3		SSB.2 FR1	SSB.2 FR1
OCNG Patterns	1~3		OP.1	OP.1
TRS configuration	1		TRS.1.1 FDD	TRS.1.1 FDD
	2		TRS.1.1 TDD	TRS.1.1 TDD
	3		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTTC configuration	1~3		SMTTC.1	SMTTC.1

CSI-RS configuration as CMR		1		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
		2		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
		3		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
CSI-IM configuration as IMR		1		CSI-IM 1.3 FDD	CSI-IM 1.3 FDD
		2		CSI-IM 1.3 TDD	CSI-IM 1.3 TDD
		3		CSI-IM 2.3 TDD	CSI-IM 2.3 TDD
reportConfigType		1~3		periodic	periodic
reportQuantity-r16		1~3		cri-SINR-r16	cri-SINR-r16
nrofReportedRS		1~3		2	2
L1-RSRP reporting period		1~3		slot80	slot80
EPRE ratio of PSS to SSS		1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/15kHz	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/CSI-RS SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112

		NR_FDD_FR1_F			-111.5	
		NR_FDD_FR1_G			-111	
		NR_FDD_FR1_H			-110.5	
$\hat{E}_s/I_{ot}$		1~3	dB	10	-3	
CSI-RS RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/CSI-RS SCS	-84.65	-120	
	NR_FDD_FR1_B				-119.5	
	NR_TDD_FR1_C				-119	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118	
	NR_FDD_FR1_F				-117.5	
	NR_FDD_FR1_G				-117	
	NR_FDD_FR1_H				-116.5	
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-81.65	-117	
	NR_FDD_FR1_B				-116.5	
	NR_TDD_FR1_C				-116	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115	
	NR_FDD_FR1_F				-114.5	
	NR_FDD_FR1_G				-114	
	NR_FDD_FR1_H				-113.5	
I _o Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2	dBm/9.36 MHz	-56.28	-87.28	
	NR_FDD_FR1_B				-86.78	
	NR_TDD_FR1_C				-86.28	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28	
	NR_FDD_FR1_F				-84.78	
	NR_FDD_FR1_G				-84.28	
	NR_FDD_FR1_H				-83.78	
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		dBm/38.16 MHz	-50.19	-81.19
	NR_FDD_FR1_B					-80.69
	NR_TDD_FR1_C					-80.19
	NR_FDD_FR1_D, NR_TDD_FR1_D					-79.69
	NR_FDD_FR1_E, NR_TDD_FR1_E					-79.19
	NR_FDD_FR1_F					-78.69
	NR_FDD_FR1_G					-78.19
	NR_FDD_FR1_H					-77.69
$\hat{E}_s/N_{oc}$		1~3	dB	10	-3	
Propagation condition		1~3		AWGN	AWGN	
Antenna configuration		1~3		1x2	1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						

- | | |
|---------|--|
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 3: | RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 4: | RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 5: | The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification. |

A.6.7.9.3.3 Test Requirements

The L1-SINR measurement accuracy for CSI-RS#0+CSI-IM#0 and CSI-RS#1+CSI-IM# of Cell 1 shall fulfil the requirements in clause 10.1.27.3.

A.6.7.10 CSI-RSRP

A.6.7.10.1 SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.9.10.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.2.3.1 and 10.1.2.3.2 for CSI-RS intra-frequency measurements.

A.6.7.9.10.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.7.10.1.2-1. Both absolute and relative accuracy of CSI-RSRP intra-frequency measurements are tested by using the parameters in A.6.7.10.1.2-2. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell.

Table A.6.7.10.1.2-1: CSI-RSRP intra frequency supported test configurations

Config	Description
1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.7.10.1.2-2: CSI-RSRP intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		40: N _{RB,c} = 106					
BWP BW	Config 1		10: N _{RB,c} = 52					

	Config 2		10: $N_{RB,c} = 52$					
	Config 3		40: $N_{RB,c} = 106$					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
SSB configuration	Config 1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1,2	μs	-	4.7	-	4.7	-	4.7
	Config 3	μs	-	2.35	-	2.35	-	2.35
SMTc configuration	Config 1		SMTc.2					
	Config 2,3		SMTc.1					
CSI-RS configuration for RRM	Config 1		CSI-RS.RRM.FR1.1 FDD					
	Config 2		CSI-RS.RRM.FR1.1 TDD					
	Config 3		CSI-RS.RRM.FR1.2 TDD					
OCNG Patterns			OCNG pattern 1					
	Config 1,2	kHz	15 kHz					

PDSCH/PDCCH subcarrier spacing			Config 3		30kHz					
EPRE ratio of PSS to SSS				dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS										
EPRE ratio of PBCH to PBCH DMRS										
EPRE ratio of PDCCH DMRS to SSS										
EPRE ratio of PDCCH to PDCCH DMRS										
EPRE ratio of PDSCH DMRS to SSS										
EPRE ratio of PDSCH to PDSCH										
EPRE ratio of OCNG DMRS to SSS(Note 1)										
EPRE ratio of OCNG to OCNG DMRS (Note 1)										
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15Kh Z	-106	-88	-114				
		NR_FDD_FR1_B				-113.5				
		NR_TDD_FR1_C				-113				
		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5				
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112				
		NR_FDD_FR1_F				-111.5				
		NR_FDD_FR1_G				-111				
		NR_FDD_FR1_H				-110.5				
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable ^{Note 5}	-94	-114				
		NR_FDD_FR1_B				-113.5				
		NR_TDD_FR1_C				-113				
		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5				
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112				
		NR_FDD_FR1_F				-111.5				
		NR_FDD_FR1_G				-111				
		NR_FDD_FR1_H				-110.5				
N_{oc} Note2	Config 1,2		dBm/SCS	-106		-88		Same as Noc/15kHz		
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable ^{Note 5}	-91	-111				
		NR_FDD_FR1_B				-110.5				
		NR_TDD_FR1_C				-110				
		NR_FDD_FR1_D, NR_TDD_FR1_D				-109.5				
		NR_FDD_FR1_E, NR_TDD_FR1_E				-109				
		NR_FDD_FR1_F				-108.5				
		NR_FDD_FR1_G				-108				
		NR_FDD_FR1_H				-107.5				
	$\hat{E}_s/I_{ot}$ for SSB			dB	2.46	-5.97	2.46	-5.97	-0.01	-4.76
$\hat{E}_s/I_{ot}$ for CSI-RS			dB	2.46	-5.97	2.46	-5.97	-0.01	-4.76	
$\hat{E}_s/N_{oc}$ for SSB			dB	6	1	6	1	3	0	
$\hat{E}_s/N_{oc}$ for CSI-RS			dB	6	1	6	1	3	0	
CSI-RSRP ^{Not e3}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-100	-105	-82	-87	111.00	114.00	

		NR_FDD_FR1_B						-	-
		NR_TDD_FR1_C						110.50	113.50
		NR_FDD_FR1_D, NR_TDD_FR1_D						-	-
		NR_FDD_FR1_E, NR_TDD_FR1_E						109.50	112.50
		NR_FDD_FR1_F						-	-
		NR_FDD_FR1_G						109.00	112.00
		NR_FDD_FR1_H						-	-
		NR_FDD_FR1_H						108.50	111.50
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6						-	-
		NR_FDD_FR1_B						108.00	111.00
		NR_TDD_FR1_C						-	-
		NR_FDD_FR1_D, NR_TDD_FR1_D						107.50	110.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-	-
		NR_FDD_FR1_F						107.00	110.00
		NR_FDD_FR1_G						-	-
		NR_FDD_FR1_H						106.50	109.50
IoNOTE3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-70.09		-85	-90	-	-
		NR_FDD_FR1_B						108.00	111.00
		NR_TDD_FR1_C						-	-
		NR_FDD_FR1_D, NR_TDD_FR1_D						107.50	110.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-	-
		NR_FDD_FR1_F						107.00	110.00
		NR_FDD_FR1_G						-	-
		NR_FDD_FR1_H						106.50	109.50
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	Not applicableNOTE 5	Not applicableNOTE 5	-85	-90	-	-
		NR_FDD_FR1_B						108.00	111.00
		NR_TDD_FR1_C						-	-
		NR_FDD_FR1_D, NR_TDD_FR1_D						107.50	110.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-	-
		NR_FDD_FR1_F						107.00	110.00
		NR_FDD_FR1_G						-	-
		NR_FDD_FR1_H						106.50	109.50
	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-70.09		-80.03		-80.03	-80.03
		NR_FDD_FR1_B						-79.53	-79.53
		NR_TDD_FR1_C						-79.03	-79.03
		NR_FDD_FR1_D, NR_TDD_FR1_D						-78.53	-78.53
		NR_FDD_FR1_E, NR_TDD_FR1_E						-78.03	-78.03
		NR_FDD_FR1_F						-77.53	-77.53
		NR_FDD_FR1_G						-77.03	-77.03
		NR_FDD_FR1_H						-76.53	-76.53
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	Not applicableNOTE 5		-51.99		-73.94	-73.94
		NR_FDD_FR1_B						-73.44	-73.44
		NR_TDD_FR1_C						-72.94	-72.94
		NR_FDD_FR1_D, NR_TDD_FR1_D						-72.44	-72.44
		NR_FDD_FR1_E, NR_TDD_FR1_E						-71.94	-71.94
		NR_FDD_FR1_F						-71.44	-71.44
		NR_FDD_FR1_G						-70.94	-70.94
		NR_FDD_FR1_H						-70.44	-70.44
Propagation condition			-	AWGN					
Antenna configuration				1x2					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	CSI-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Subtest 1 is not used when testing with 30kHz SSB and CSI-RS SCS.
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification

A.6.7.10.1.3 Test Requirements

The CSI-RSRP measurement accuracy for cell 1 and cell 2 shall fulfil absolute requirement in clause 10.1.2.3.1 and relative requirement in clause 10.1.2.3.2.

A.6.7.10.2 SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.9.10.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.4.3.1 and 10.1.4.3.2 for CSI-RS inter-frequency measurements with the testing configurations for NR cells in Table A.6.7.9.2.1-1.

Table A.6.7.10.2.1-1: Applicable NR configurations for FR1 inter-frequency CSI-RSRP accuracy test

Config	Description
1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.6.7.10.2.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.6.7.10.2.2-1 below. Both absolute and relative accuracy of CSI-RSRP inter-frequency measurements are tested by using the parameters in Table A.6.7.10.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.6.7.10.2.2-1: CSI-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~3		freq1	freq2	freq1	freq2
BW _{channel}	1	MHz	10: N _{RB,c} = 52		10: N _{RB,c} = 52	
	2		10: N _{RB,c} = 52		10: N _{RB,c} = 52	
	3		40: N _{RB,c} = 106		40: N _{RB,c} = 106	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	

	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1,2	μs	-	4.7	-	4.7
	3	μs	-	2.35	-	2.35
SMTC configuration	1		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
CSI-RS configuration for RRM	1		CSI-RS.RRM.FR1.1 FDD		CSI-RS.RRM.FR1.1 FDD	
	2		CSI-RS.RRM.FR1.1 TDD		CSI-RS.RRM.FR1.1 TDD	
	3		CSI-RS.RRM.FR1.2 TDD		CSI-RS.RRM.FR1.2 TDD	
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSSNote 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						

N_{oc} Note2	NR_FDD_FR1_A	1~3	dBm/15 kHz	-94.65		$(N_{oc}$ for Channel 2 +8dB)	-115
	, NR_TDD_FR1_A						
	NOTE 5						
	NR_FDD_FR1_B						-114.5
	NR_TDD_FR1_C						-114
	NR_FDD_FR1_D						-113.5
	, NR_TDD_FR1_D						
	NR_FDD_FR1_E						-113
	, NR_TDD_FR1_E						
	NR_FDD_FR1_F						-112.5
NR_FDD_FR1_G	-112						
NR_FDD_FR1_H	-111.5						
N_{oc} Note2	NR_FDD_FR1_A	1,2	dBm/SSB SCS	-94.65		$(N_{oc}$ for Channel 2 +8dB)	-115
	, NR_TDD_FR1_A						
	NOTE 5,						
	NR_FDD_FR1_B						-114.5
	NR_TDD_FR1_C						-114
	NR_FDD_FR1_D						-113.5
	, NR_TDD_FR1_D						
	NR_FDD_FR1_E						-113
	, NR_TDD_FR1_E						
	NR_FDD_FR1_F						-112.5
	NR_FDD_FR1_G						-112
	NR_FDD_FR1_H						-111.5
	NR_FDD_FR1_A	3		-91.65		$(N_{oc}$ for Channel 2 +8dB)	-112.00
	, NR_TDD_FR1_A						
	NOTE 5,						
	NR_FDD_FR1_B						-112.50
	NR_TDD_FR1_C						-112.00
	NR_FDD_FR1_D						-111.50
	, NR_TDD_FR1_D						
	NR_FDD_FR1_E						-111.00
	, NR_TDD_FR1_E						
	NR_FDD_FR1_F						-110.50
	NR_FDD_FR1_G						-110.00
	NR_FDD_FR1_H						-110.50
$\hat{E}_s/I_{ot}$ for SSB		1~3	dB	10	10	13	-3
$\hat{E}_s/I_{ot}$ for CSI-RS		1~3	dB	10	10	13	-3
CSI-RSRP ^{Note3}	NR_FDD_FR1_A	1,2	dBm/SCS	-84.65		(RSRP for Cell 2 +25dB)	-118.00
	, NR_TDD_FR1_A						
	NOTE 5,						
	NR_FDD_FR1_B						-117.50
	NR_TDD_FR1_C						-117.00
	NR_FDD_FR1_D						
, NR_TDD_FR1_D	-116.50						

	NR_FDD_FR1_E						-116.00				
	, NR_TDD_FR1_E						-115.50				
	NR_FDD_FR1_F						-115.00				
	NR_FDD_FR1_G						-114.50				
	NR_FDD_FR1_H	3					-114.50				
	NR_FDD_FR1_A										
	, NR_TDD_FR1_A NOTE 5,										
	NR_FDD_FR1_B						-114.50				
	NR_TDD_FR1_C						-114.00				
	NR_FDD_FR1_D						-113.50				
	, NR_TDD_FR1_D										
	NR_FDD_FR1_E						-113.00				
	, NR_TDD_FR1_E										
	NR_FDD_FR1_F						-112.50				
	NR_FDD_FR1_G						-112.00				
	NR_FDD_FR1_H						-111.50				
I ₀ Note3	NR_FDD_FR1_A	1,2	dBm/ 9.36MH z		-56.28	I ₀ for Channel 2 +19.75dB	-85.28				
	, NR_TDD_FR1_A NOTE 5,										
	NR_FDD_FR1_B						-84.78				
	NR_TDD_FR1_C						-84.28				
	NR_FDD_FR1_D						-83.78				
	, NR_TDD_FR1_D										
	NR_FDD_FR1_E						-83.28				
	, NR_TDD_FR1_E										
	NR_FDD_FR1_F						-82.78				
	NR_FDD_FR1_G						-82.28				
	NR_FDD_FR1_H						-81.78				
	NR_FDD_FR1_A	3	dBm/ 38.16M Hz		-50.19	I ₀ for Channel 2 +19.75dB	-79.19				
	, NR_TDD_FR1_A NOTE 5,										
	NR_FDD_FR1_B						-78.69				
	NR_TDD_FR1_C						-78.19				
	NR_FDD_FR1_D						-77.69				
	, NR_TDD_FR1_D										
	NR_FDD_FR1_E						-77.19				
	, NR_TDD_FR1_E										
	NR_FDD_FR1_F						-76.69				
	NR_FDD_FR1_G						-76.19				
	NR_FDD_FR1_H						-75.69				
$\hat{E}_s/N_{oc}$ for SSB		1~3	dB	10	10	13	-3				
$\hat{E}_s/N_{oc}$ for CSI-RS		1~3	dB	10	10	13	-3				
Propagation condition		1~3	-	AWGN		AWGN					
Antenna configuration		1~3		1x2		1x2					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.											

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	CSI-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.6.7.10.2.3 Test Requirements

The CSI-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirement in clause 10.1.4.3.1 and relative requirement in clause 10.1.4.3.2.

A.6.7.11 CSI-RSRQ

A.6.7.11.1 SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.11.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.7.2.

A.6.7.11.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.6.7.11.1.2-1. The absolute accuracy of CSI-RSRQ intra-frequency measurement is tested by using the parameters in Table A.6.7.11.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.6.7.11.1.2-1: Intra frequency CSI-RSRQ supported test configurations

Config	Description
1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.11.1.2-2: CSI-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Duplex mode	Config 1		FDD					
	Config 2,3							
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		40: N _{RB,c} = 106					
Gap Pattern ID			0					

BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Control Channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS Configuration	Config 1		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OP. 1					
Time offset with Cell 1	Config 1	μs	-	4.7	-	4.7	-	4.7
	Config 2,3	μs	-	2.35	-	2.35	-	2.35
CSI-RS configuration for RRM	Config 1		CSI-RS.RRM.FR1.1 FDD					
	Config 2		CSI-RS.RRM.FR1.1 TDD					
	Config 3		CSI-RS.RRM.FR1.2 TDD					
SMTC configuration	Config 1		SMTC.2					
	Config 2,3		SMTC.1					
SSB configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								

EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 15kHz z	-85	-101	-114			
		NR_FDD_FR1_B				-113.5			
		NR_TDD_FR1_C				-113			
		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5			
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112			
		NR_FDD_FR1_F				-111.5			
		NR_FDD_FR1_G				-111			
		NR_FDD_FR1_H				-110.5			
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-91	-	-114			
		NR_FDD_FR1_B				-113.5			
		NR_TDD_FR1_C				-113			
		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5			
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112			
		NR_FDD_FR1_F				-111.5			
		NR_FDD_FR1_G				-111			
		NR_FDD_FR1_H				-110.5			
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ SCS	-85	-101	-114			
		NR_FDD_FR1_B				-113.5			
		NR_TDD_FR1_C				-113			
		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5			
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112			
		NR_FDD_FR1_F				-111.5			
		NR_FDD_FR1_G				-111			
		NR_FDD_FR1_H				-110.5			
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-88	-	-111			
		NR_FDD_FR1_B				-110.5			
		NR_TDD_FR1_C				-110			
		NR_FDD_FR1_D, NR_TDD_FR1_D				-109.5			
		NR_FDD_FR1_E, NR_TDD_FR1_E				-109			
		NR_FDD_FR1_F				-108.5			
		NR_FDD_FR1_G				-108			
		NR_FDD_FR1_H				-107.5			
$\hat{E}_s/I_{\alpha}$ for SSB			dB	-1.76		-4.7		-5.46	-5.46
$\hat{E}_s/I_{\alpha}$ for CSI-RS			dB	-1.76		-4.7		-5.46	-5.46
$\hat{E}_s/N_{oc}$ for SSB			dB	3	3	-2.9	-2.9	-4	-4

$\hat{E}_s/N_{oc}$ for CSI-RS			dB	3	3	-2.9	-2.9	-4	-4
SS-RSRP/ CSI-RSRP pNote3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ SCS	-82	-82	-103.9	-103.9	-118	-118
		NR_FDD_FR1_B						-117.5	-117.5
		NR_TDD_FR1_C						-117	-117
		NR_FDD_FR1_D, NR_TDD_FR1_D						-116.5	-116.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-116	-116
		NR_FDD_FR1_F						-115.5	-115.5
		NR_FDD_FR1_G						-115	-115
		NR_FDD_FR1_H						-114.5	-114.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	-85	-85	-	-	-115	-115	
		NR_FDD_FR1_B					-114.5	-114.5	
		NR_TDD_FR1_C					-114	-114	
		NR_FDD_FR1_D, NR_TDD_FR1_D					-113.5	-113.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E					-113	-113	
		NR_FDD_FR1_F					-112.5	-112.5	
		NR_FDD_FR1_G					-112	-112	
		NR_FDD_FR1_H					-111.5	-111.5	
SS-RSRQ/CSI-RSRQ Note3		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D, NR_TDD_FR1_D							
		NR_FDD_FR1_E, NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
IoNote3	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36M Hz	-50	-50	-70	-70	-83.5	
		NR_FDD_FR1_B						-83	
		NR_TDD_FR1_C						-82.5	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-82	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-81.5	
		NR_FDD_FR1_F						-81	
		NR_FDD_FR1_G						-80.5	
		NR_FDD_FR1_H						-80	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16 MHz	-50	-50	-	-	-77.4	
		NR_FDD_FR1_B						-76.9	
		NR_TDD_FR1_C						-76.4	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-75.9	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-75.4	
		NR_TDD_FR1_E							

		NR_FDD_FR1_F						-74.9
		NR_FDD_FR1_G						-74.4
		NR_FDD_FR1_H						-73.9
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRQ/CSI-RSRQ, SS-RSRP/CSI-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRQ/CSI-RSRQ, SS-RSRP/CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: NR operating band groups are as defined in clause 3.5.2. Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.								

A.6.7.11.1.3 Test Requirements

The CSI-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.7.2.

A.6.7.11.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.11.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.9.2.1 and 10.1.9.2.2.

A.6.7.11.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.6.7.11.2.2-1. Both absolute accuracy and relative accuracy requirements of CSI-RSRQ inter-frequency measurement are tested by using test parameters in Table A.6.7.11.2.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.6.7.11.2.2-1: CSI-RSRQ Inter frequency CSI-RSRQ supported test configurations

Config	Description
1	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.11.2.2-2: CSI-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					

	Config 3		TDDConf.2.1					
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		40: N _{RB,c} = 106					
Gap pattern ID	Config 1,2,3		0					
BWP BW	Config 1		10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		40: NRB,c = 106					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2,5		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
TRS Configuration	Config 1		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OCNG pattern 1					
Time offset with Cell 1	Config 1,2	μs	-	4.7	-	4.7	-	4.7
	Config 3	μs	-	2.35	-	2.35	-	2.35
CSI-RS configuration for RRM	Config 1		CSI-RS.RRM.FR1.1 FDD					
	Config 2		CSI-RS.RRM.FR1.1 TDD					
	Config 3		CSI-RS.RRM.FR1.2 TDD					
SSB configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
SMTC configuration	Config 1,2		SMTC.2					
	Config 3		SMTC.1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
	Config 3		30 kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0

EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18	-106	-116		
		NR_FDD_FR1_B				-115.5		
		NR_TDD_FR1_C				-115		
		NR_FDD_FR1_D NR_TDD_FR1_D				-114.5		
		NR_FDD_FR1_E NR_TDD_FR1_E				-114		
		NR_FDD_FR1_F				-113.5		
		NR_FDD_FR1_G				-113		
		NR_FDD_FR1_H				-112.5		
N_{oc} Note2	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-86.27	-113	-116		
		NR_FDD_FR1_B				-115.5		
		NR_TDD_FR1_C				-115		
		NR_FDD_FR1_D NR_TDD_FR1_D				-114.5		
		NR_FDD_FR1_E NR_TDD_FR1_E				-114		
		NR_FDD_FR1_F				-113.5		
		NR_FDD_FR1_G				-113		
		NR_FDD_FR1_H				-112.5		
N_{oc} Note2	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18	-106	-116		
		NR_FDD_FR1_B				-115.5		
		NR_TDD_FR1_C				-115		
		NR_FDD_FR1_D NR_TDD_FR1_D				-114.5		
		NR_FDD_FR1_E NR_TDD_FR1_E				-114		
		NR_FDD_FR1_F				-113.5		
		NR_FDD_FR1_G				-113		
		NR_FDD_FR1_H				-112.5		
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-83.27	-110	-113		
		NR_FDD_FR1_B				-112.5		
		NR_TDD_FR1_C				-112		
		NR_FDD_FR1_D NR_TDD_FR1_D				-111.5		
		NR_FDD_FR1_E NR_TDD_FR1_E				-111		
		NR_FDD_FR1_F				-110.5		
		NR_FDD_FR1_G				-110		
		NR_FDD_FR1_H				-109.5		
$\hat{E}_s/I_{\alpha}$ for SSB			dB	-1.75	-1.75	3	-1.75	
$\hat{E}_s/I_{\alpha}$ for CSI-RS			dB	-1.75	-1.75	3	-1.75	

$\hat{E}_s / N_{oc}$ for SSB			dB	-1.75		-1.75		3	-1.75
$\hat{E}_s / N_{oc}$ for CSI-RS			dB	-1.75		-1.75		3	-1.75
SS-RSRP/CSI-RSRP ^{Note3}	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-81.93	-81.93	- 107.75	- 107.75	-113	- 117.75
		NR_FDD_FR1_B						-112.5	- 117.25
		NR_TDD_FR1_C						-112	- 116.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	- 116.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	- 115.75
		NR_FDD_FR1_F						-110.5	- 115.2
		NR_FDD_FR1_G						-110	- 114.75
		NR_FDD_FR1_H						-109.5	- 114.25
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85.02	-85.02	- 111.75	- 111.75	-110	- 114.75
		NR_FDD_FR1_B						-109.5	- 114.25
		NR_TDD_FR1_C						-109	- 113.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-108.5	- 113.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-108	- 112.75
		NR_FDD_FR1_F						-107.5	- 112.2
		NR_FDD_FR1_G						-107	- 111.75
		NR_FDD_FR1_H						-106.5	- 111.25
SS-RSRQ/CSI-RSRQ ^{Note3}		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-14.77	-14.77	-40.59	-40.59	12.56T	14.76T
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D NR_TDD_FR1_D							
		NR_FDD_FR1_E NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							

IoNote3	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-50	-75.83	-83.28	-	85.83	
		NR_FDD_FR1_B				-82.78	-	85.33	
		NR_TDD_FR1_C				-82.28	-	84.83	
		NR_FDD_FR1_D NR_TDD_FR1_D				-81.78	-	84.33	
		NR_FDD_FR1_E NR_TDD_FR1_E				-81.28	-	83.83	
		NR_FDD_FR1_F				-80.78	-	83.33	
		NR_FDD_FR1_G				-80.28	-	82.83	
		NR_FDD_FR1_H				-79.78	-	82.33	
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-50	-76.73	-77.19	-	79.73	
		NR_FDD_FR1_B				-76.69	-	79.23	
		NR_TDD_FR1_C				-76.19	-	78.73	
		NR_FDD_FR1_D NR_TDD_FR1_D				-75.69	-	78.23	
		NR_FDD_FR1_E NR_TDD_FR1_E				-75.19	-	77.73	
		NR_FDD_FR1_F				-74.69	-	77.23	
		NR_FDD_FR1_G				-74.19	-	76.73	
		NR_FDD_FR1_H				-73.69	-	76.53	
Propagation condition			-	AWG N	AWGN	AWGN	AWGN	AWG N	AWG N
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2
Note 1: OCNB shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.									
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.									
Note 3: SS-RSRQ/CSI-RSRQ, SS-RSRP/CSI-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.									
Note 4: SS-RSRQ/CSI-RSRQ, SS-RSRP/CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.									
Note 5: NR operating band groups are as defined in clause 3.5.2.									
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.									

A.6.7.11.2.3 Test Requirements

The CSI-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.9.2.1 and 10.1.9.2.2.

A.6.7.12 CSI-SINR

A.6.7.12.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.12.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.12.2.1.

A.6.7.12.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.6.7.11.1.2-1. The absolute accuracy of CSI-SINR intra-frequency measurement is tested by using the parameters in Table A.6.7.11.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.6.7.12.1.2-1: CSI-SINR Intra frequency CSI-SINR supported test configurations

Config	Description
1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.12.1.2-2: CSI-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD	

	Config 3		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1. 1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1. 1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2. 1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1			
CSI-RSSI-Measurement			Not Applicable			
Time offset with Cell 1	Config 1,2	μs	-	2.35	-	2.35
	Config 3	μs	-	1.17	-	1.17
SSB configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
SMTC configuration	Config 1		SMTC.2			
	Config 2,3		SMTC.1			
CSI-RS for mobility	Config 1		CSI-RS.RRM.FR1.1 FDD			
	Config 2		CSI-RS.RRM.FR1.1 TDD			
	Config 3		CSI-RS.RRM.FR1.2 TDD			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15			
	Config 3		30			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz z	-93	-116		
	NR_FDD_FR1_B			-115.5		
	NR_TDD_FR1_C			-115		
	NR_FDD_FR1_D, NR_TDD_FR1_D			-114.5		
	NR_FDD_FR1_E, NR_TDD_FR1_E			-114		
	NR_FDD_FR1_F			-113.5		
	NR_FDD_FR1_G			-113		
	NR_FDD_FR1_H			-112.5		
N_{oc} Note2	Config 1,2	dBm/SCS	-93	Same as Noc for 15 kHz		
	Config 3		-90	-113		
				-112.5		
				-112		
				-111.5		
				-111		
				-110.5		

		NR_FDD_FR1_G				-110	
		NR_FDD_FR1_H				-109.5	
$\hat{E}_s/I_{ot}$ for SSB			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s/I_{ot}$ for CSI-RS			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s/N_{oc}$ for SSB			dB	4.54	2.66	-4	-4
$\hat{E}_s/N_{oc}$ for CSI-RS			dB	4.54	2.66	-4	-4
CSI-RSRP ^{Not e3}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-88.46	-90.34	-120	-120
		NR_FDD_FR1_B				-119.5	-119.5
		NR_TDD_FR1_C				-119	-119
		NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5	-118.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-118	-118
		NR_FDD_FR1_F				-117.5	-117.5
		NR_FDD_FR1_G				-117	-117
		NR_FDD_FR1_H				-116.5	-116.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85.46	-87.34	-117	-117
		NR_FDD_FR1_B				-116.5	-116.5
		NR_TDD_FR1_C				-116	-116
		NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5	-115.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-115	-115
		NR_FDD_FR1_F				-114.5	-114.5
		NR_FDD_FR1_G				-114	-114
		NR_FDD_FR1_H				-113.5	-113.5
CSI-SINR ^{Note3}		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	0	-3.19	-5.46	-5.46
		NR_FDD_FR1_B					
		NR_TDD_FR1_C					
		NR_FDD_FR1_D, NR_TDD_FR1_D					
		NR_FDD_FR1_E, NR_TDD_FR1_E					
		NR_FDD_FR1_F					
		NR_FDD_FR1_G					
		NR_FDD_FR1_H					
Io ^{Note3}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.5	-85.51		
		NR_FDD_FR1_B			-85.01		
		NR_TDD_FR1_C			-84.51		
		NR_FDD_FR1_D, NR_TDD_FR1_D			-84.01		
		NR_FDD_FR1_E, NR_TDD_FR1_E			-83.51		
		NR_FDD_FR1_F			-83.01		
		NR_FDD_FR1_G			-82.51		
		NR_FDD_FR1_H			-82.01		

	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-51.41	-79.41
		NR_FDD_FR1_B			-78.91
		NR_TDD_FR1_C			-78.41
		NR_FDD_FR1_D, NR_TDD_FR1_D			-77.91
		NR_FDD_FR1_E, NR_TDD_FR1_E			-77.41
		NR_FDD_FR1_F			-76.91
		NR_FDD_FR1_G			-76.41
		NR_FDD_FR1_H			-75.91
Propagation condition			-	AWGN	
Antenna configuration			-	1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: CSI-SINR, CSI-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: CSI-SINR, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5: NR operating band groups are as defined in clause 3.5.2.					
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.					

A.6.7.12.1.3 Test Requirements

The CSI-SINR measurement accuracy shall fulfil the requirements in clause 10.1.12.2.1.

A.6.7.12.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.6.7.12.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.14.2.1 and 10.1.14.2.2.

A.6.7.12.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.6.7.12.2.2-1. Both absolute accuracy and relative accuracy requirements of CSI-SINR inter-frequency measurement are tested by using test parameters in Table A.6.7.12.2.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.6.7.12.2.2-1: CSI-SINR Inter frequency CSI-SINR supported test configurations

Config	Description
1	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB and CSI-RS SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB and CSI-RS SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.6.7.12.2.2-2: CSI-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
TRS configuration	Config 1		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
PDSCH Reference measurement channel	Config 1		SR.1.1 1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 1 FDD	-	R.1.1 FDD	-	CR.1.1 1 FDD	
	Config 2		CR.1.1 1 TDD		CR.1.1 TDD		CR.1.1 1 TDD	
	Config 3		CR.2.1 1 TDD		CR.2.1 TDD		CR.2.1 1 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 1.1 FDD	-	CCR.1.1 1 FDD	-	CCR.1.1 .1 FDD	-
	Config 2		CCR.1.1 1.1 TDD		CCR.1.1 1 TDD		CCR.1.1 .1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 1 TDD		CCR.2.1 .1 TDD	
OCNG Patterns			OP.1					
CSI-RSSI-Measurement			Not Applicable					
Time offset with Cell 1	Config 1,2	μs	-	2.35	-	2.35	-	2.35
	Config 3	μs	-	1.17	-	1.17	-	1.17
SMTc configuration	Config 1		SMTc.2					
	Config 2,3		SMTc.1					
SSB configuration	Config 1,2		SSB.1 FR1					
	Config 3		SSB.2 FR1					
CSI-RS for mobility	Config 1		CSI-RS.RRM.FR1.1 FDD					
	Config 2		CSI-RS.RRM.FR1.1 TDD					

			Config 3	CSI-RS.RRM.FR1.2 TDD					
PDSCH/PDCCH subcarrier spacing			Config 1,2	kHz	15				
			Config 3		30				
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} ^{Note2}	Config 1,2	NR_FDD_F R1_A NR_TDD_F R1_A ^{NOTE 6}	dBm/15kHz	-88	-108.5	-119.5			
		NR_FDD_F R1_B				-119			
		NR_TDD_F R1_C				-118.5			
		NR_FDD_F R1_D NR_TDD_F R1_D				-118			
		NR_FDD_F R1_E NR_TDD_F R1_E				-117.5			
		NR_FDD_F R1_F				-117			
		NR_FDD_F R1_G				-116.5			
		NR_FDD_F R1_H				-116			
		N_{oc} ^{Note2}				Config 1,2 N		dBm/15kHz	-88
Config 3	NR_FDD_F R1_A NR_TDD_F R1_A ^{NOTE 6}		-116.5						
	NR_FDD_F R1_B		-116						
	NR_TDD_F R1_C		-115.5						
	NR_FDD_F R1_D NR_TDD_F R1_D		-115						
	NR_FDD_F R1_E		-114.5						

		NR_TDD_F R1_E								
		NR_FDD_F R1_F								
		NR_FDD_F R1_G								
		NR_FDD_F R1_H								
$\hat{E}_s/I_{ot}$ for SSB			dB	-1.75	-1.75	15	15	-4.0	-4.0	
$\hat{E}_s/I_{ot}$ for CSI-RS			dB	-1.75	-1.75	15	15	-4.0	-4.0	
$\hat{E}_s/N_{oc}$ for SSB			dB	-1.75		15		-4.0		
$\hat{E}_s/N_{oc}$ for CSI-RS			dB	-1.75		15		-4.0		
CSI-RSRP ^{Note3}	Config 1,2	NR_FDD_F R1_A	dBm/S CS	-89.75	-93.5					
		NR_TDD_F R1_A ^{NOTE 6}								
		NR_FDD_F R1_B								-123
		NR_TDD_F R1_C								-122.5
		NR_FDD_F R1_D								-122
		NR_TDD_F R1_D								
		NR_FDD_F R1_E								-121.5
		NR_TDD_F R1_E								
		NR_FDD_F R1_F								-121
		NR_TDD_F R1_F								
		NR_FDD_F R1_G								-120.5
		NR_TDD_F R1_G								
	NR_FDD_F R1_H	-120								
	NR_TDD_F R1_H									
	Config 3	NR_FDD_F R1_A		-86.75	-90.5					
		NR_TDD_F R1_A ^{NOTE 6}								
		NR_FDD_F R1_B								-120
		NR_TDD_F R1_C								-119.5
		NR_FDD_F R1_D								-119
		NR_TDD_F R1_D								
		NR_FDD_F R1_E								-118.5
		NR_TDD_F R1_E								
		NR_FDD_F R1_F								-118
		NR_TDD_F R1_F								
		NR_FDD_F R1_G								-117.5
		NR_TDD_F R1_G								
		NR_FDD_F R1_H								-117
		NR_TDD_F R1_H								

CSI-SINR ^{Note3}		NR_FDD_F R1_A NR_TDD_F R1_A ^{NOTE 6}	dB	-1.75	15	-4.0
		NR_FDD_F R1_B				
		NR_TDD_F R1_C				
		NR_FDD_F R1_D NR_TDD_F R1_D				
		NR_FDD_F R1_E NR_TDD_F R1_E				
		NR_FDD_F R1_F				
		NR_FDD_F R1_G				
		NR_FDD_F R1_H				
		NR_FDD_F R1_A NR_TDD_F R1_A ^{NOTE 6}				-90.09
		NR_FDD_F R1_B				-89.59
I ₀ ^{Note3}	Config 1,2	NR_TDD_F R1_C	dBm/ 9.36M Hz	-57.83	-65.4	-89.09
		NR_FDD_F R1_D NR_TDD_F R1_D				-88.59
		NR_FDD_F R1_E NR_TDD_F R1_E				-88.09
		NR_FDD_F R1_F				-87.59
		NR_FDD_F R1_G				-87.09
		NR_FDD_F R1_H				-86.59
	Config 3	NR_FDD_F R1_A NR_TDD_F R1_A ^{NOTE 6}	dBm/ 38.16 MHz	-51.73	-59.3	-84
		NR_FDD_F R1_B				-83.5
		NR_TDD_F R1_C				-83
		NR_FDD_F R1_D NR_TDD_F R1_D				-82.5
		NR_FDD_F R1_E NR_TDD_F R1_E				-82

		NR_FDD_F R1_F				-81.5
		NR_FDD_F R1_G				-81
		NR_FDD_F R1_H				-80.5
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	CSI-SINR, CSI-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	CSI-SINR, CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5:	NR operating band groups are as defined in clause 3.5.2.					
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.					

A.6.7.12.2.3 Test Requirements

The CSI-SINR measurement accuracy shall fulfil the requirements in clause 10.1.14.2.1 and 10.1.14.2.2.

A.6.7.13 RSTD measurements

A.6.7.13.1 RSTD measurement accuracy test case for single positioning frequency layer

A.6.7.13.1.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.7.13.1.1-1.

Table A.6.7.13.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cells. Both cells are on the same NR RF channel in FR1. GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 9.9.2.

Table A.6.7.13.1.1-2: RSTD accuracy test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN	1~3		freq1	Freq1	freq1	Freq1

BW _{channel}	1	MHz	20: N _{RB,c} = 106		20: N _{RB,c} = 106	
	2		20: N _{RB,c} = 106		20: N _{RB,c} = 106	
	3		50: N _{RB,c} = 133		50: N _{RB,c} = 133	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
Measurement gap	1, 2, 3		GP#24 or GP#0		GP#24 or GP#0	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1	μs	-	3	-	3
	2,3		-	3	-	3
SMTc configuration	1		SMTc.2		SMTc.2	
	2,3		SMTc.1		SMTc.1	
PRS configuration	1		PRS.1.1 FR1		PRS.1.2 FR1	
	2		PRS.1.1 FR1		PRS.1.2 FR1	
	3		PRS.2.1 FR1		PRS.2.2 FR1	
PRS Resource slot offset	1, 2, 3	slot	0	4	0	4
Expected RSTD	1, 2, 3	μs	N/A	3	N/A	3
Expected RSTD uncertainty	1, 2, 3	μs	N/A	5	N/A	5
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						

EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
EPRE ratio of PRS to SSS	1~3	dB	0	0	0	0
N_{oc} ^{Note2}	1,2	dBm/	-98		-98	
	3	SCS	-95		-95	
PRS $\hat{E}_s/I_{ot}$	1~3	dB	-6	-13	-6	-13
PRP ^{Note3}	1,2	dBm/SC	-103.7	-109.9	-103.7	-109.9
	3	S	-100.7	-106.9	-100.7	-106.9
I_o ^{Note3}	1,2	dBm/ 19.08M Hz	-65.70	-65.70	-65.70	-65.70
	3	dBm/ 47.88M Hz	-61.72	-61.72	-61.72	-61.72
PRS $\hat{E}_s/N_{oc}$	1~3	dB	-5.7	-11.9	-5.7	-11.9
SSB $\hat{E}_s/N_{oc}$	1~3	dB	-5.7		-11.9	
Propagation condition	1~3	-	AWGN		AWGN	
Antenna configuration	1~3		1x2		1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: PRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. The I_o is calculated based only on the symbols in which PRS is transmitted.						
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.						

A.6.7.13.1.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.6.7.13.2 RSTD measurement accuracy test case for dual positioning frequency layer

A.6.7.13.2.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.7.13.2.1-1.

Table A.6.7.13.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell on NR RF channel #1 in FR1. Cell 2 is a neighbour cell on a different NR RF channel #2 in FR1. GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 9.9.2.

Table A.6.7.13.2.1-2: RSTD accuracy test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN	1~3		freq1	freq2	freq1	freq2
BW _{channel}	1	MHz	20: N _{RB,c} = 106		20: N _{RB,c} = 106	
	2		20: N _{RB,c} = 106		20: N _{RB,c} = 106	
	3		50: N _{RB,c} = 133		50: N _{RB,c} = 133	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
Measurement gap	1, 2, 3		GP#24 or GP#0		GP#24 or GP#0	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1	µs	-	3	-	3
	2,3		-	3	-	3
SMTC configuration	1		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
PRS configuration	1		PRS.1.1 FR1		PRS.1.2 FR1	
	2		PRS.1.1 FR1		PRS.1.2 FR1	
	3		PRS.2.1 FR1		PRS.2.2 FR1	
PRS Resource slot offset	1, 2, 3	slot	0	4	0	4
Expected RSTD	1, 2, 3	µs	N/A	3	N/A	3
Expected RSTD uncertainty	1, 2, 3	µs	N/A	5	N/A	5
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						

EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
EPRE ratio of PRS to SSS	1~3	dB	0	0	0	0
N_{oc} ^{Note2}	1,2	dBm/SCS	-98	-98	-98	-98
	3		-95	-95	-95	-95
PRS $\hat{E}_s / I_{ot}$	1~3	dB	-6	-13	-6	-13
PRP ^{Note3}	1,2	dBm/SCS	-104	-111	-104	-111
	3		-101	-108	-101	-108
I_o ^{Note3}	1,2	dBm/19.08M Hz	-65.98	-66.74	-65.98	-66.74
	3	dBm/47.88M Hz	-62.00	-62.76	-62.00	-62.76
PRS $\hat{E}_s / N_{oc}$	1~3	dB	-6	-13	-6	-13
Propagation condition	1~3	-	AWGN	AWGN	AWGN	AWGN
Antenna configuration	1~3		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: PRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. The I_o is calculated based only on the symbols in which PRS is transmitted. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.						

A.6.7.13.2.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.6.7.13.3 RSTD measurement accuracy test case with reduced number of samples for single positioning frequency layer in FR1 in RRC_CONNECTED state

A.6.7.13.3.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the accuracy requirements for reduced number of samples specified in clause 10.1.23.2 in an environment with AWGN propagation conditions. In this test UE that supports *supportedDL-PRS-ProcessingSamples* is configured by LMF to perform PRS measurement with reduced number of samples.

The supported test configurations are specified in Table A.6.7.13.3.1-1.

Table A.6.7.13.3.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cells. Both cells are on the same NR RF channel in FR1. GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be longer than the UE measurement period as defined in clause 9.9.2.7.

Table A.6.7.13.3.1-2: RSTD accuracy test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN	1~3		freq1	Freq1	freq1	Freq1
BW _{channel}	1	MHz	20: N _{RB,c} = 106		20: N _{RB,c} = 106	
	2		20: N _{RB,c} = 106		20: N _{RB,c} = 106	
	3		50: N _{RB,c} = 133		50: N _{RB,c} = 133	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1	μs	-	3	-	3
	2,3		-	3	-	3
SMTTC configuration	1		SMTTC.2		SMTTC.2	

	2,3		SMTC.1		SMTC.1	
PRS configuration	1		PRS.1.3 FR1		PRS.1.4 FR1	
	2		PRS.1.3 FR1		PRS.1.4 FR1	
	3		PRS.2.3 FR1		PRS.2.4 FR1	
PRS BW	1,2		52 PRBs		-	
	3		48 PRBs		-	
PRS muting info	1~3		'10'	'01'	'10'	'01'
Expected RSTD	1, 2, 3	μs	N/A	3	N/A	3
Expected RSTD uncertainty	1, 2, 3	μs	N/A	5	N/A	5
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
N_{oc} ^{Note2}	1,2	dBm/ SCS	-98		-98	
	3		-95		-95	
$\hat{E}_s/I_{ot}$	1~3	dB	-3	-6	-3	-6
PRS-RSRP ^{Note3}	1,2	dBm/SC	-99.44	-101.65	-99.44	-101.65
	3	S	-96.44	-98.65	-96.44	-98.65
SS-RSRP ^{Note3}	1,2	dBm/SC	-99.44	-101.65	-99.44	-101.65
	3	S	-96.44	-98.65	-96.44	-98.65
I_o ^{Note3}	1,2	dBm/ 19.08M Hz	-63.63	-63.63	-63.63	-63.63
	3	dBm/ 47.88M Hz	-59.65	-59.65	-59.65	-59.65
$\hat{E}_s/N_{oc}$	1~3	dB	-1.44	-3.65	-1.44	-3.65
Propagation condition	1~3	-	AWGN		AWGN	
Antenna configuration	1~3		1x2		1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.						

A.6.7.13.3.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.6.7.13.4 RSTD measurement accuracy test case with Rx TEG

A.6.7.13.4.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement when the measurements of reference cell and neighbor cell are within the same Rx TEG meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.7.13.4.1-1.

Table A.6.7.13.4.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. GP#24 is configured if UE supports GP#24, otherwise GP#0 is configured. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 9.9.2.

The UE is requested to provide the Rx TEG in the test via *nr-UE-RxTEG-Request-r17* in *NR-TDOA-RequestLocationInformation*.

The test applies to the UE supporting Rx TEG defined in *NR-UE-TEG-Capability* and reporting the same Rx TEG for the measurements of reference cell and neighbour cell.

Table A.6.7.13.4.1-2: RSTD accuracy test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN	1~3		freq1	Freq1	freq1	Freq1
BW _{channel}	1	MHz	20: N _{RB,c} = 106		20: N _{RB,c} = 106	
	2		20: N _{RB,c} = 106		20: N _{RB,c} = 106	
	3		50: N _{RB,c} = 133		50: N _{RB,c} = 133	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	

RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3	dB	OP.1		OP.1	
EPRE ratio of PSS to SSS	1~3		0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
EPRE ratio of PRS to SSS						
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1	μ s	-	3	-	3
	2,3		-	3	-	3
SMTC configuration	1		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
PRS configuration	1		PRS.1.1 FR1		PRS.1.2 FR1	
	2		PRS.1.1 FR1		PRS.1.2 FR1	
	3		PRS.2.1 FR1		PRS.2.2 FR1	
PRS Resource slot offset	1~3	slot	0	4	0	4
Expected RSTD	1, 2, 3	μ s	N/A	3	N/A	3
Expected RSTD uncertainty	1, 2, 3	μ s	N/A	5	N/A	5
N_{oc} ^{Note2}	1,2	dBm/ SCS	-98		-98	
	3		-95		-95	

PRS $\hat{E}_s / I_{ot}$	1~3	dB	-6	-13	-6	-13
PRP ^{Note3}	1,2	dBm/SC	-103.7	-109.9	-103.7	-109.9
	3	S	-100.7	-106.9	-100.7	-106.9
Io ^{Note3}	1,2	dBm/ 19.08M Hz	-65.70	-65.70	-65.70	-65.70
	3	dBm/ 47.88M Hz	-61.72	-61.72	-61.72	-61.72
PRS $\hat{E}_s / N_{oc}$	1~3	dB	-5.7	-11.9	-5.7	-11.9
Propagation condition	1~3	-	AWGN		AWGN	
Antenna configuration	1~3		1x2		1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: RRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.						

A.6.7.13.4.2 Test Requirements

The RSTD measurement for Cell 1 and Cell 2 should fulfil the absolute accuracy requirements with same Rx TEG in clause 10.1.23.2.

A.6.7.14 PRS-RSRP measurements

A.6.7.14.1 SA: measurement accuracy with PRS in FR1

A.6.7.14.1.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.24.2.1 and 10.1.24.2.2.

A.6.7.14.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.7.14.1.2-1. Both absolute and relative accuracy of PRS-RSRP measurements are tested by using the parameters in A.6.7.14.1.2-2. In all test cases, Cell 1 is the PCell.

Table A.6.7.14.1.2-1: PRS-RSRP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.7.14.1.2-2: PRS-RSRP test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW _{channel}	Config 1	MHz	20: N _{RB,c} = 106			
	Config 2		20: N _{RB,c} = 106			
	Config 3		50: N _{RB,c} = 133			
BWP BW	Config 1					
	Config 2					
	Config 3					
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
TRS configuration	Config 1		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable			
Measurement gap			GP#24 or GP#0 ^{Note 7}			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD	
PRS configuration	Config 1		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
	Config 2		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
	Config 3		PRS.2.3 FR1	PRS.2.3 FR1	PRS.2.4 FR1	PRS.2.4 FR1

PRS Resource slot offset (slot)		Config 1,2,3	slot	0	4	0	4
SSB configuration		Config 1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
		Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
		Config 3		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1		Config 1	μs	-	3	-	3
		Config 2,3		-	3	-	3
Expected RSTD		Config 1,2,3	μs	3			
Expected RSTD uncertainty		Config 1,2,3	μs	5			
SMTC configuration		Config 1		SMTC.2			
		Config 2,3		SMTC.1			
OCNG Patterns				OCNG pattern 1			
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz			
		Config 3		30 kHz			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
EPRE ratio of PRS to SSS			dB	0	0	0	0
N_{oc} Note2	Config 1,2		dBm/15KhZ	-98		-98	
	Config 3			-98		-98	
N_{oc} Note2	Config 1,2		dBm/SCS	-98		-98	
	Config 3			-95		-95	
PRS $\hat{E}_s/I_{ot}$			dB	-2.41	-12.12	-2.41	-12.12
PRS $\hat{E}_s/N_{oc}$			dB	-2	-10	-2	-10
PRP Note3	Config 1, 2		dBm/SCS	-100	-108	-100	-108
	Config 3			-97	-105	-97	-105
I_o Note3	Config 1,2		dBm/19.08MHz z	-64.57		-64.57	
	Config 3		dBm/47.88MHz z	-60.59		-60.59	
Propagation condition				AWGN			
Antenna configuration				1x2			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							

Note 3:	PRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	PRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Void.
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification
Note 7:	GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.

A.6.7.14.1.3 Test Requirements

In each test, the absolute PRS-RSRP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.2.1. The relative PRS-RSRP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.2.2.

A.6.7.14.2 SA: measurement accuracy with PRS in FR1 with reduced sample number

A.6.7.14.2.1 Test Purpose and Environment

The purpose of this test is to verify that the accuracy of PRS-RSRP measurement with reduced sample number is within the specified limits provided that PRS is transmitted within the active BWP of the UE. UE can support *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED*, and the LMF indicates the UE to perform positioning measurements with reduced number of samples N_{sample} via *reducedDL-PRS-ProcessingSamples*. This test will verify the requirements in clauses 10.1.24.2.1 and 10.1.24.2.2.

A.6.7.14.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.7.14.2.2-1. Both absolute and relative accuracy of PRS-RSRP measurements are tested by using the parameters in A.6.7.14.2.2-2. In all test cases, Cell 1 is the PCell.

Table A.6.7.14.2.2-1: PRS-RSRP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.7.14.2.2-2: PRS-RSRP test parameters

Parameter		Unit	Test 1	
			Cell 1	Cell 2
Cell ID			489	0
SSB ARFCN			freq1	
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
BW _{channel}	Config 1	MHz	20: N _{RB,c} = 106	
	Config 2		20: N _{RB,c} = 106	

	Config 3		50: N _{RB,c} = 133	
BWP BW	Config 1		20: N _{RB,c} = 106	
	Config 2		20: N _{RB,c} = 106	
	Config 3		50: N _{RB,c} = 133	
Downlink initial BWP configuration			DLBWP.0.1	
Downlink dedicated BWP configuration			DLBWP.1.1	
Uplink initial BWP configuration			ULBWP.0.1	
Uplink dedicated BWP configuration			ULBWP.1.1	
TRS configuration	Config 1		TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable	
Measurement gap			GP#24 or GP#0 ^{Note 7}	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-
	Config 2		SR.1.1 TDD	
	Config 3		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-
	Config 2		CR.1.1 TDD	
	Config 3		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD	
PRS configuration	Config 1		PRS.1.4 FR1	PRS.1.4 FR1
	Config 2		PRS.1.4 FR1	PRS.1.4 FR1
	Config 3		PRS.2.4 FR1	PRS.2.4 FR1
PRS Resource slot offset (slot)	Config 1,2,3	slot	0	4
SSB configuration	Config 1		SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1	ms	-	3
	Config 2,3	µs	-	3
SMTc configuration	Config 1		SMTc.2	
	Config 2,3		SMTc.1	
OCNG Patterns			OCNG pattern 1	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz	
	Config 3		30 kHz	
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				

N_{oc} ^{Note2}	Config 1,2		dBm/15KhZ	-98	
	Config 3				
N_{oc} ^{Note2}	Config 1,2		dBm/SCS	-98	
	Config 3			-95	
$\hat{E}_s/I_{ot}$			dB	0	-6
$\hat{E}_s/N_{oc}$			dB	2.23	-1.73
SS-RSRP			dB	Same as PRS-RSRP	
PRS-RSRP ^{Note3}	Config 1, 2		dBm/SCS	-95.77	-99.73
	Config 3			-92.77	-96.73
I_o ^{Note3}	Config 1,2		dBm/19.08MHz	-61.71	
	Config 3		dBm/47.88MHz	-57.73	
Propagation condition				AWGN	
Antenna configuration				1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SS-RSRP and PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Void.
Note 6:	Void.
Note 7:	GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.

A.6.7.14.2.3 Test Requirements

In the test, the absolute PRS-RSRP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.2.1. The relative PRS-RSRP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.2.2.

A.6.7.14.3 Void

A.6.7.14.3.1 Void

A.6.7.14.3.2 Void

A.6.7.14.3.3 Void

A.6.7.15 UE Rx-Tx time difference measurements

A.6.7.15.1 UE Rx-Tx time difference measurement accuracy for single positioning frequency layer in FR1 SA

A.6.7.15.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx time difference measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations in listed in Table A.6.7.15.1.1-1.

Table A.6.7.15.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR1.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test.

The UE is configured with measurement gap pattern ID #0 or ID #24 before the test.

The UE is configured to transmit positioning SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The test equipment then compares the difference of these two timings to the UE Rx-Tx measurement reported by the UE for each cell.

A.6.7.15.1.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.6.7.15.1.2-1.

Table A.6.7.15.1.2-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
RF Channel Number		1,2,3	1	1	1	1
Measurement gap		1,2,3	GP#24 or GP#0 ^{Note 4}		GP#24 or GP#0 ^{Note 4}	
DRX		1,2,3	OFF		OFF	
Time offset with Cell 1	μs	1, 2, 3	N/A	3	N/A	3
TDD configuration		1	N/A	N/A	N/A	N/A
		2	TDDConf.1.1	TDDConf.1.1	TDDConf.1.1	TDDConf.1.1
		3	TDDConf.2.1	TDDConf.2.1	TDDConf.2.1	TDDConf.2.1
PDSCH RMC configuration		1	SR.1.1 FDD	N/A	SR.1.1 FDD	N/A
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD	N/A	CR.1.1 FDD	N/A
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	N/A	CCR.1.1 FDD	N/A
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1	OP.1	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	1, 2, 3	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						

EPRE ratio of OCNG to OCNG DMRS Note 1						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.1.1 FDD	N/A	TRS.1.1 FDD	N/A
		2	TRS.1.1 TDD		TRS.1.1 TDD	
		3	TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	N/A	DLBWP.0.1 ULBWP.0.1	N/A
Active DL BWP configuration		1, 2, 3	DLBWP.1.1	N/A	DLBWP.1.1	N/A
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	N/A	ULBWP.1.1	N/A
PRS configuration		1	PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.2 FR1	PRS.1.2 FR1
		2	PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.2 FR1	PRS.1.2 FR1
		3	PRS.2.1 FR1	PRS.2.1 FR1	PRS.2.2 FR1	PRS.2.2 FR1
PRS Resource slot offset	slot	1, 2, 3	0	4	0	4
SRS configuration		1	POS-SRS.1	N/A	POS-SRS.1	N/A
		2	POS-SRS.1	N/A	POS-SRS.1	N/A
		3	POS-SRS.2	N/A	POS-SRS.2	N/A
N_{oc} Note 2	dBm/SCS	1	-98		-98	
		2	-98		-98	
		3	-95		-95	
N_{oc} Note 2	dBm/15 kHz	1	-98		-98	
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-2.41	-12.12	-2.41	-12.12
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-2	-10	-2	-10
		2				
		3				
PRP Note 3	dBm/SCS kHz	1	-100	-108	-100	-108
		2	-100	-108	-100	-108
		3	-97	-105	-97	-105
Io	dBm/19.08 MHz	1	-64.57	-64.57	-64.57	-64.57
	dBm/19.08 MHz	2	-64.57	-64.57	-64.57	-64.57
	dBm/47.88 MHz	3	-60.59	-60.59	-60.59	-60.59
Propagation Condition		1, 2, 3	AWGN		AWGN	
Note 1: Void.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.						

Table A.6.7.15.1.2-2: Void

A.6.7.15.1.3 Test requirements

The UE Rx-Tx time difference measurement fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.2 for both Cell 1 and Cell 2.

A.6.7.15.2 UE Rx-Tx time difference measurement accuracy with reduced number of samples in FR1 SA

A.6.7.15.2.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx time difference measurement accuracy with reduced number of samples is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations in listed in Table A.6.7.15.2.1-1.

Table A.6.7.15.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR1.

The *NR-Multi-RTT-ProvideAssistanceData* and *NR-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test.

The UE is configured to measure UE Rx-Tx time difference using reduced number of samples via *requestedDL-PRS-ProcessingSamples* in *NR-Multi-RTT-RequestLocationInformation* during the test.

The UE is configured with measurement gap pattern ID #0 or ID #24 before the test.

The UE is configured to transmit positioning SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The test equipment then compares the difference of these two timings to the UE Rx-Tx measurement reported by the UE for each cell.

A.6.7.15.2.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.6.7.15.2.2-1.

Table A.6.7.15.2.2-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1	
			Cell 1	Cell 2
RF Channel Number		1,2,3	1	1
Measurement gap		1,2,3	GP#24 or GP#0 ^{Note 4}	
DRX		1,2,3	OFF	
Time offset with Cell 1	μs	1, 2, 3	N/A	3
TDD configuration		1	N/A	N/A
		2	TDDConf.1.1	TDDConf.1.1

		3	TDDConf.2.1	TDDConf.2.1
PDSCH RMC configuration		1	SR.1.1 FDD	N/A
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD	N/A
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	N/A
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	1, 2, 3	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
EPRE ratio of PRS to SSS				
TRS Configuration		1	TRS.1.1 FDD	N/A
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	N/A
Active DL BWP configuration		1, 2, 3	DLBWP.1.1	N/A
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	N/A
PRS configuration		1	PRS.1.1 FR1	PRS.1.1 FR1
		2	PRS.1.1 FR1	PRS.1.1 FR1
		3	PRS.2.1 FR1	PRS.2.1 FR1
PRS BW		1	52 PRBs	52 PRBs
		2	52 PRBs	52 PRBs
		3	48 PRBs	48 PRBs
PRS Resource slot offset	slot	1, 2, 3	0	4
SRS configuration		1	POS-SRS.1	N/A
		2	POS-SRS.1	N/A
		3	POS-SRS.2	N/A
N_{oc} ^{Note 2}	dBm/SCS	1	-98	
		2	-98	
		3	-95	
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98	
		2		
		3		
$\text{PRS } \hat{E}_s / I_{ot}$	dB	1	0	-6
		2		
		3		
	dB	1	2.23	-1.73

PRS $\hat{E}_s/N_{oc}$		2		
		3		
PRP ^{Note 3}	dBm/SCS kHz	1	-95.77	-99.73
		2	-95.77	-99.73
		3	-92.77	-96.73
Io	dBm/19.08 MHz	1	-61.71	-61.71
	dBm/19.08 MHz	2	-61.71	-61.71
	dBm/47.88 MHz	3	-57.73	-57.73
Propagation Condition		1, 2, 3	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				

A.6.7.15.2.3 Test requirements

The UE Rx-Tx time difference measurement with reduced number of samples fulfils the UE Rx-Tx measurement accuracy.

A.6.7.15.3 UE Rx-Tx time difference measurement accuracy with RxTx TEG

A.6.7.15.3.1 Test purpose and environment

The purpose of the test is to verify that the relative UE Rx-Tx time difference measurement accuracy when the two measurements are within the same RxTx TEG is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations is listed in Table A.6.7.15.3.1-1.

Table A.6.7.15.3.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR1.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test.

The UE is requested to provide the RxTx TEG in the test via *nr-UE-RxTxTEG-Request-r17* in *NR-Multi-RTT-RequestLocationInformation*.

The test applies to the UE supporting RxTx TEG defined in *NR-UE-TEG-Capability* and reporting the same RxTx TEG for the two UE Rx-Tx measurements.

The UE is configured with measurement gap pattern ID #0 or ID #24 before the test.

The UE is configured to transmit positioning SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The UE Rx-Tx time difference is derived by the difference of the receiving timing and the transmit timing for each cell.

A.6.7.15.3.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.6.7.15.3.2-1. y requirements specified in clause 10.1.25.2 for both Cell 1 and Cell 2.

Table A.6.7.15.3.2-2: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
RF Channel Number		1,2,3	1	1	1	1
Measurement gap		1,2,3	GP#24 or GP#0 ^{Note 4}		GP#24 or GP#0 ^{Note 4}	
DRX		1,2,3	OFF		OFF	
Time offset with Cell 1	μs	1, 2, 3	N/A	3	N/A	3
TDD configuration		1	N/A	N/A	N/A	N/A
		2	TDDConf.1.1	TDDConf.1.1	TDDConf.1.1	TDDConf.1.1
		3	TDDConf.2.1	TDDConf.2.1	TDDConf.2.1	TDDConf.2.1
PDSCH RMC configuration		1	SR.1.1 FDD	N/A	SR.1.1 FDD	N/A
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD	N/A	CR.1.1 FDD	N/A
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	N/A	CCR.1.1 FDD	N/A
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1	OP.1	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	1, 2, 3	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						

EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.1.1 FDD	N/A	TRS.1.1 FDD	N/A
		2	TRS.1.1 TDD		TRS.1.1 TDD	
		3	TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	N/A	DLBWP.0.1 ULBWP.0.1	N/A
Active DL BWP configuration		1, 2, 3	DLBWP.1.1	N/A	DLBWP.1.1	N/A
Active UL BWP configuration		1, 2, 3	ULBWP.1.1	N/A	ULBWP.1.1	N/A
PRS configuration		1	PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.2 FR1	PRS.1.2 FR1
		2	PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.2 FR1	PRS.1.2 FR1
		3	PRS.2.1 FR1	PRS.2.1 FR1	PRS.2.2 FR1	PRS.2.2 FR1
PRS Resource slot offset	slot	1, 2, 3	0	4	0	4
SRS configuration		1	POS-SRS.1	N/A	POS-SRS.1	N/A
		2	POS-SRS.1	N/A	POS-SRS.1	N/A
		3	POS-SRS.2	N/A	POS-SRS.2	N/A
N_{oc} ^{Note 2}	dBm/SCS	1	-98		-98	
		2	-98		-98	
		3	-95		-95	
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98		-98	
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-2.41	-12.12	-2.41	-12.12
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-2	-10	-2	-10
		2				
		3				
PRP ^{Note 3}	dBm/SCS kHz	1	-100	-108	-100	-108
		2	-100	-108	-100	-108
		3	-97	-105	-97	-105
I _o	dBm/19.08 MHz	1	-64.57	-64.57	-64.57	-64.57
	dBm/19.08 MHz	2	-64.57	-64.57	-64.57	-64.57
	dBm/47.88 MHz	3	-60.59	-60.59	-60.59	-60.59
Propagation Condition		1, 2, 3	AWGN		AWGN	
Note 1: Void.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.						

A.6.7.15.3.3 Test requirements

The relative accuracy is derived by the difference of the UE Rx-Tx measurements on the two cells.

The UE Rx-Tx time difference measurements for Cell 1 and Cell 2 fulfil the relative UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.x.

A.6.7.16 PRS-RSRPP measurements

A.6.7.16.1 SA: measurement accuracy with PRS in FR1

A.6.7.16.1.1 Test Purpose and Environment

The purpose of this test is to verify that the accuracy of PRS-RSRPP measurement in RRC_CONNECTED is within the specified limits. This test will verify the requirements in clauses 10.1.38.2.

A.6.7.16.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.7.16.1.2-1. Both absolute accuracy of PRS-RSRPP measurements are tested by using the parameters in A.6.7.16.1.2-2. In all test cases, Cell 1 is the PCell.

Table A.6.7.16.1.2-1: PRS-RSRPP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.7.16.1.2-2: PRS-RSRPP test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW _{channel}	Config 1	MHz	20: N _{RB,c} = 106			
	Config 2		20: N _{RB,c} = 106			
	Config 3		50: N _{RB,c} = 133			
BWP BW	Config 1		20: N _{RB,c} = 106			
	Config 2		20: N _{RB,c} = 106			
	Config 3		50: N _{RB,c} = 133			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
TRS configuration	Config 1		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable			

Measurement gap			GP#24 or GP#0 ^{Note 7}			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD	
PRS configuration	Config 1		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
	Config 2		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
	Config 3		PRS.2.3 FR1	PRS.2.3 FR1	PRS.2.4 FR1	PRS.2.4 FR1
PRS Resource slot offset (slot)	Config 1,2,3	slot	0	4	0	4
SSB configuration	Config 1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1	ms	-	3	-	3
	Config 2,3	μs	-	3	-	3
SMTC configuration	Config 1		SMTC.2			
	Config 2,3		SMTC.1			
OCNG Patterns			OCNG pattern 1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						

N_{oc} Note2	Config 1,2		dBm/15Kh Z	-98		-98	
	Config 3			-98		-98	
N_{oc} Note2	Config 1,2		dBm/SCS	-98		-98	
	Config 3			-95		-95	
$\hat{E}_s/I_{ot}$			dB	-2.41	-12.12	-2.41	-12.12
$\hat{E}_s/N_{oc}$			dB	-2	-10	-2	-10
PRS- RSRP Note3	Config 1, 2		dBm/SCS	-100	-108	-100	-108
	Config 3		dBm/SCS	-97	-105	-97	-105
I_o Note3	Config 1,2		dBm/19.08 MHz	-64.57		-64.57	
	Config 3		dBm/47.88 MHz	-60.59		-60.59	
Propagation condition				Two-tap channel defined in 38.101-4 Annex B.2.4, $a = 1$, $\tau_d = 0.45 \mu s$ and $f_D = 5 \text{ Hz}$			
Antenna configuration				1x2			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	PRS-RSRPP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Void.
Note 6:	Void.
Note 7:	GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.

A.6.7.16.1.3 Test Requirements

In each test, the absolute PRS-RSRPP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.38.2.

A.6.7.16.2 SA: measurement accuracy with reduced PRS samples in FR1

A.6.7.16.2.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRPP measurement accuracy with $N_{sample} = 1$ in FR1 is within the specified limits. This test will verify the requirements in clauses 10.1.38.2.

The UE under test should support *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED*, and the TE indicates the UE to perform positioning measurements with reduced number of samples. The PRS bandwidth is contained within the active BWP and the power difference between the serving cell SS-RSRP and neighbour cell PRS-RSRP is within 6dB, so that $N_{sample} = 1$ is assumed.

A.6.7.16.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.7.16.2.2-1. In all test cases, Cell 1 is the PCell.

Table A.6.7.16.2.2-1: PRS-RSRPP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.7.16.2.2-2: PRS-RSRPP test parameters

Parameter		Unit	Test 1	
			Cell 1	Cell 2
Cell ID			489	0
SSB ARFCN			freq1	
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
BW _{channel}	Config 1	MHz	20: $N_{RB,c} = 106$	
	Config 2		20: $N_{RB,c} = 106$	
	Config 3		50: $N_{RB,c} = 133$	
BWP BW	Config 1		20: $N_{RB,c} = 106$	

	Config 2		20: $N_{RB,c} = 106$	
	Config 3		50: $N_{RB,c} = 133$	
Downlink initial BWP configuration			DLBWP.0.1	
Downlink dedicated BWP configuration			DLBWP.1.1	
Uplink initial BWP configuration			ULBWP.0.1	
Uplink dedicated BWP configuration			ULBWP.1.1	
TRS configuration	Config 1		TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable	
Measurement gap			GP#24 or GP#0 ^{Note 5}	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-
	Config 2		SR.1.1 TDD	
	Config 3		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-
	Config 2		CR.1.1 TDD	
	Config 3		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD	
PRS configuration	Config 1		PRS.1.4 FR1	PRS.1.4 FR1
	Config 2		PRS.1.4 FR1	PRS.1.4 FR1
	Config 3		PRS.2.4 FR1	PRS.2.4 FR1
PRS bandwidth	Config 1,2,3		52 PRBs	52 PRBs
PRS Resource slot offset (slot)	Config 1,2,3	slot	0	4
SSB configuration	Config 1		SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1	ms	-	3
	Config 2,3	μ s	-	3
SMTC configuration	Config 1		SMTC.2	
	Config 2,3		SMTC.1	
OCNG Patterns			OCNG pattern 1	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz	
	Config 3		30 kHz	
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note2}	Config 1,2	dBm/15KhZ	-98	
	Config 3			
N_{oc} ^{Note2}	Config 1,2	dBm/SCS	-98	
	Config 3		-95	

$\hat{E}_s/I_{\text{ot}}$		dB	0	-6
$\hat{E}_s/N_{oc}$		dB	2.23	-1.73
PRS-RSRP ^{Note3}	Config 1, 2	dBm/SCS	-95.77	-99.73
	Config 3		-92.77	-96.73
SS-RSRP ^{Note3}	Config 1, 2	dBm/SCS	-95.77	-99.73
	Config 3		-92.77	-96.73
I_o ^{Note3}	Config 1,2	dBm/19.08MH z	-61.71	
	Config 3	dBm/47.88MH z	-57.73	
Propagation condition			Two-tap channel ^{Note6}	
Antenna configuration			1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5: GP#24 is configured if UE supports MG#24, otherwise GP#0 is configured.				
Note 6: The two-tap channel model is defined in 38.101-4 Annex B.2.4 ($\alpha = 1$, $\tau_d=0.45 \mu s$ and $f_D=5$ Hz).				

A.6.7.16.2.3 Test Requirements

In each test, the absolute PRS-RSRPP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.38.2.

A.6.8 Measurement procedure in RRC_INACTIVE

A.6.8.1 RSTD measurements

A.6.8.1.1 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR1 SA in RRC_INACTIVE state

A.6.8.1.1.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 5.6.2.5 in an environment with AWGN propagation conditions in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations are specified in Table A.6.8.1.1.1-1.

Table A.6.8.1.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode

2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All 3 cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall be in RRC_CONNECTED state and shall not have any timing information of Cell 2 and Cell 3. During T2 UE shall be in RRC_INACTIVE state and all three cells transmit PRS resources within initial DL BWP of the UE and with the same numerology as the initial DL BWP.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance data* and location information request.

The beginning of the time interval T2 shall be aligned with the first DRX cycle containing a DL PRS resource(s).

The UE is configured with DRX cycle of 1.28s.

The general test parameters are listed in Table A.6.8.1.1.1-2, and cell specific test parameters are listed in Table A.6.8.1.1.1-3 and Table A.6.8.1.1.1-4.

Table A.6.8.1.1.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
SSB configuration	Config 1		SSB.1 FR1	
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET	Config 1		CR.1.1 FDD	As specified in clause A.3.1.2.1
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	

RMC configuration				
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Initial BWP configuration	Config 1,2,3		DLBWP.0.1 ULBWP.0.1	
Active UL BWP configuration	Config 1,2,3		ULBWP.1.1	
PRS Configuration	Config 1		PRS.1.1 FR1	As specified in clause A.3.31
	Config 2		PRS.1.1 FR1	
	Config 3		PRS.2.1 FR1	
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX		s	1.28	
Radio frame receive time offset between the cells at the UE antenna connector		µs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD		µs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells		µs	5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data			4	Including the reference cell
PRS muting info			Cell 1: '10' Cell 2: '01' Cell 3: '10'	Corresponds to prs-MutingInfo defined in TS 37.355 [34]
PRS resource RE offset			Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1		s	3	The length of the time interval from the beginning of each test
T2		s	5	The length of the time interval that follows immediately after time interval T1.

Table A.6.8.1.1.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positioning frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	N/A	N/A
N_{oc} Note 3	Config 1	dBm/SCS	-98		
	Config 2	dBm/SCS	-98		

	Config 3	dBm/SCS	-95		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$		dB	10	-Infinity	-Infinity
Io ^{Note 4}	Config 1	dBm/ 19.08MHz	-56.54	-56.54	-56.54
	Config 2	dBm/ 19.08MHz	-56.54	-56.54	-56.54
	Config 3	dBm/ 47.88MHz	-52.56	-52.56	-52.56
SSB RP ^{Note4}	Config 1	dBm/SCS	-88	-Infinity	-Infinity
	Config 2	dBm/SCS	-88	-Infinity	-Infinity
	Config 3	dBm/SCS	-85	-Infinity	-Infinity
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The resources for uplink transmission are assigned after the end of time period T2 to UEs that do not support SDT for measurement reporting. Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 4: SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.					

Table A.6.8.1.1.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1	Cell 2	Cell 3
			T2	T2	T2
NR RF Channel Number			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
PRACH configuration			FR1 PRACH configuration 1	FR1 PRACH configuration 1	FR1 PRACH configuration 1
N_{oc} Note 3	Config 1	dBm/SCS	-98	-98	-98
	Config 2	dBm/SCS	-98	-98	-98
	Config 3	dBm/SCS	-95	-95	-95
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-5.45	-11.67	-11.67
	Config 2	dB	-5.45	-11.67	-11.67
	Config 3	dB	-5.45	-11.67	-11.67
Io Note 4	Config 1	dBm/ 19.08MHz	-65.43	-65.43	-65.43
	Config 2	dBm/ 96.48MHz	-65.43	-65.43	-65.43
	Config 3	dBm/ 47.88MHz	-61.44	-61.44	-61.44

PRS $\hat{E}_s/I_{ot}$	dB	-6	-13	-13
Propagation Condition		AWGN		
Note 1:	OCNG shall be used such that active cells (all, except Cell 3 in T2) are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the subframes with transmitted PRS.			
Note 2:	The resources for uplink transmission are assigned after the end of time period T2 to UEs that do not support SDT for measurement reporting.			
Note 3:	Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

A.6.8.1.1.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 5.6.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 5.6.2.5 starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be higher than the time duration above because of the uncertainty in acquiring the first available PRACH occasion to transition to RRC_CONNECTED state to report the measurements.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD1970049.

A.6.8.1.2 NR RSTD measurement reporting delay test case with reduced number of samples in RRC_INACTIVE, FR1 SA

A.6.8.1.2.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 5.6.2 in an environment with AWGN propagation conditions in FR1 in standalone scenario when single-sample measurements are requested by the LMF. This test is applicable to UEs that support *supportedDL-PRS-ProcessingSamples-RRC-Inactive*.

The supported test configurations are specified in Table A.6.8.1.2.1-1.

Table A.6.8.1.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All 3 cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. The UE shall be in RRC_CONNECTED state during T1 and in RRC_INACTIVE state during T2. During time duration T1, the UE

shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2. PRS resources from all three cells are transmitted within the initial DL BWP of the UE and with the same numerology as the initial DL BWP.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle in RRC_INACTIVE.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance data* and location information request.

The *nr-DL-TDOA-RequestLocationInformation* IE should indicate to the UE that single-sample measurements are requested, i.e. requestedDL-PRS-ProcessingSamples-r17 is set to *requested*.

The general test parameters are listed in Table A.6.8.1.2.1-2, and cell specific test parameters are listed in Table A.6.8.1.2.1-3 and Table A.6.8.1.2.1-4.

Table A.6.8.1.2.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
SSB configuration	Config 1		SSB.1 FR1	
	Config 2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTC configuration	Config 1		SMTC.2	
	Config 2		SMTC.1	
	Config 3		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET RMC configuration	Config 1		CR.1.1 FDD	As specified in clause A.3.1.2.1
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	

Initial BWP configuration	Config 1,2,3		DLBWP.0.1 ULBWP.0.1	
PRS Configuration	Config 1		PRS.1.2 FR1	As specified in clause A.3.31.
	Config 2		PRS.1.2 FR1	
	Config 3		PRS.2.2 FR1	
PRS Resource slot offset	Config 1, 2, 3	slots	Cell 1, 2, 3: 0	
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX cycle length		s	1.28	
Radio frame receive time offset between the cells at the UE antenna connector		µs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD		µs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells		µs	5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data			4	Including the reference cell
PRS muting info			Cell 1: '10' Cell 2: '01' Cell 3: '10'	Corresponds to prs-MutingInfo defined in TS 37.355 [34]
PRS resource RE offset			Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1		s	3	The length of the time interval from the beginning of each test
T2		s	5	The length of the time interval that follows immediately after time interval T1

Table A.6.8.1.2.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positioning frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	N/A	N/A
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-98		
	Config 2	dBm/SCS	-98		
	Config 3	dBm/SCS	-95		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity

SSB $\hat{E}_s/N_{oc}$		dB	0	-Infinity	-Infinity
Io Note 4	Config 1	dBm/ 19.08MHz	-63.94	-63.94	-63.94
	Config 2	dBm/ 19.08MHz	-63.94	-63.94	-63.94
	Config 3	dBm/ 47.88MHz	-59.96	-59.96	-59.96
SSB RP Note4	Config 1	dBm/SCS	-98	-Infinity	-Infinity
	Config 2	dBm/SCS	-98	-Infinity	-Infinity
	Config 3	dBm/SCS	-95	-Infinity	-Infinity
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 4: SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.					

Table A.6.8.1.2.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1	Cell 2	Cell 3
			T2	T2	T2
NR RF Channel Number			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
PRACH configuration			FR1 PRACH configuration 1	FR1 PRACH configuration 1	FR1 PRACH configuration 1
N_{oc} Note 3	Config 1	dBm/SCS	-98	-98	-98
	Config 2	dBm/SCS	-98	-98	-98
	Config 3	dBm/SCS	-95	-95	-95
PRS $\hat{E}_s / N_{oc}$	Config 1	dB	1	-1.2	-1.2
	Config 2	dB	1	-1.2	-1.2
	Config 3	dB	1	-1.2	-1.2
I_o Note 4	Config 1	dBm/ 19.08MHz	-61.18	-61.18	-61.18
	Config 2	dBm/ 19.08MHz	-61.18	-61.18	-61.18
	Config 3	dBm/ 47.88MHz	-57.20	-57.20	-57.20
PRS $\hat{E}_s / I_{ot}$		dB	-3	-6	-6

Propagation Condition	AWGN
Note 1:	OCNG shall be used such that all active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols, except for slots where PRS is transmitted by any of the cells.
Note 2:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3:	Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4:	lo levels apply only for symbols where PRS is transmitted.

A.6.8.1.2.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 5.6.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 5.6.2.5 starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be higher than the time duration above because of the uncertainty in acquiring the first available PRACH occasion to transition to RRC_CONNECTED state to report the measurements.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD_1970049.

A.6.8.2 PRS-RSRP measurements

A.6.8.2.1 PRS-RSRP reporting delay test case for single positioning frequency layer in RRC_INACTIVE

A.6.8.2.1.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRP measurement in RRC_INACTIVE meets the delay requirements specified in clause 5.6.3.5 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.8.2.1.1-1.

Table A.6.8.2.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The test consists of two consecutive time intervals, with duration of T1 and T2. Both cells transmit PRS during T2.

During T1 UE is in RRC_CONNECTED, the *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot

containing the two messages for the assistance data and location information request is denoted as #n. In the next DL slot after slot #n, UE is released into RRC_INACTIVE.

The beginning of the time interval T2 is the first PRS resource occasion occurring ΔT after the slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.8.2.1.1-2, and cell specific test parameters are listed in Table A.6.8.2.1.1-3.

Table A.6.8.2.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
BW _{channel}	MHz	1	20: N _{RB,c} = 106	
		2	20: N _{RB,c} = 106	
		3	50: N _{RB,c} = 133	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTTC configuration		1	SMTTC.2	
		2	SMTTC.1	
		3	SMTTC.1	
CP length		1, 2, 3	Normal	
DRX		1, 2, 3	1.28s	
Time offset between serving and neighbour cells	μs	1, 2, 3	3	Synchronous cells
Expected RSTD	μs	1, 2, 3	3	
Expected RSTD uncertainty	μs	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	6	

Table A.6.8.2.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	

		2	PRS.1.4 FR1		PRS.1.4 FR1	
		3	PRS.2.4 FR1		PRS.2.4 FR1	
PRS muting info		1, 2, 3	‘10’		‘01’	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41	-Infinity	-12.12
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2	-Infinity	-10
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-100	-Infinity	-108
		2	-Infinity	-100	-Infinity	-108
		3	-Infinity	-97	-Infinity	-105
SS-RSRP Note 3	dBm/SCS kHz	1	-88	-88	-Infinity	-88
		2	-88	-88	-Infinity	-88
		3	-85	-85	-Infinity	-85
Io	dBm/19.08 MHz	1	N/A	-64.57	N/A	-64.57
	dBm/19.08 MHz	2		-64.57		-64.57
	dBm/47.88 MHz	3		-60.59		-60.59
Propagation Condition		1, 2, 3	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP/PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.8.2.1.2 Test Requirements

The UE shall perform and report the PRS-RSRP measurements for Cell 1 and Cell 2, within the time limit specified in clause 5.6.3.5, starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be higher than the time duration above because of the uncertainty in acquiring the first available PRACH occasion to transition to RRC_CONNECTED state to report the measurements.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.8.2.2 PRS-RSRP reporting delay test case with reduced number of samples in RRC_INACTIVE

A.6.8.2.2.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRP measurement meets the delay requirements specified in clause 5.6.3.5 in an environment with AWGN propagation conditions when single-sample measurements are requested by the LMF. This test is applicable to UEs that support *supportedDL-PRS-ProcessingSamples-RRC-Inactive*.

The supported test configurations are specified in Table A.6. 8.2.2.1-1.

Table A.6. 8.2.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. The UE shall be in RRC_CONNECTED state during T1 and in RRC_INACTIVE state during T2. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2. PRS resources from both cells are transmitted within the initial DL BWP of the UE and with the same numerology as the initial DL BWP.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle in RRC_INACTIVE.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-AoD assistance* data and location information request.

The *nr-DL-AoD-RequestLocationInformation* IE should indicate to the UE that single-sample measurements are requested, i.e. *requestedDL-PRS-ProcessingSamples-r17* is set to m1.

The general test parameters are listed in Table A.6.8.2.2.1-2, and cell specific test parameters are listed in Table A.6.8.2.2.1-3.

Table A.6.8.2.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
BW _{channel}	MHz	1	20: N _{RB,c} = 106	
		2	20: N _{RB,c} = 106	
		3	50: N _{RB,c} = 133	
SSB configuration		1	SSB.1 FR1	

		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CP length		1, 2, 3	Normal	
DRX cycle length	s	1, 2, 3	1.28	
Time offset between serving and neighbour cells	μs	1, 2, 3	3	Synchronous cells
Expected RSTD	μs	1, 2, 3	3	
Expected RSTD uncertainty	μs	1, 2, 3	5	
T1	s	1, 2, 3	3	
T2	s	1, 2, 3	5	

Table A.6.8.2.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
PRS configuration Note 5		1	PRS.1.2 FR1		PRS.1.2 FR1	
		2	PRS.1.2 FR1		PRS.1.2 FR1	
		3	PRS.2.2 FR1		PRS.2.2 FR1	
PRS Resource slot offset	slots	1, 2, 3	0		0	
PRS muting info		1, 2, 3	'10'		'01'	
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	0	-Infinity	-6
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	2.23	-Infinity	-1.73
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-95.77	-Infinity	-99.73
		2	-Infinity	-95.77	-Infinity	-99.73
		3	-Infinity	-92.77	-Infinity	-96.73
SS-RSRP Note 3	dBm/SCS kHz	1	-98	-98	-Infinity	-98
		2	-98	-98	-Infinity	-98
		3	-95	-95	-Infinity	-95
I_o Note 3	dBm/19.08 MHz	1	N/A	-61.71	N/A	-61.71
	dBm/19.08 MHz	2		-61.71		-61.71
	dBm/47.88 MHz	3		-57.73		-57.73
Propagation Condition		1, 2, 3	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP/PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. I_o levels apply only for symbols where PRS is transmitted.						
Note 4: OCNG shall be used such that all active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols, except for slots where PRS is transmitted by any of the cells.						
Note 5: Void.						

A.6.8.2.2.2 Test Requirements

The UE shall perform and report the PRS-RSRP measurements for Cell 1 and Cell 2, within the time limit specified in clause 5.6.3.5, starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be higher than the time duration above because of the uncertainty in acquiring the first available PRACH occasion to transition to RRC_CONNECTED state to report the measurements.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.8.3 UE Rx-Tx time difference measurements

A.6.8.3.1 UE Rx-Tx time difference measurement for single positioning frequency layer in FR1 SA

A.6.8.3.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement in RRC_INACTIVE state meets the requirements specified in clause 5.6.4 in AWGN propagation condition in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations in listed in Table A.6.8.3.1.1-1.

Table A.6.8.3.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n. In the next DL slot after slot #n, UE is released into RRC_INACTIVE.

The beginning of the time interval T2 is the first PRS resource occasion occurring ΔT after the slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The UE is configured to transmit positioning SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.8.3.1.1-2 and Table A.6.8.3.1.1-3 respectively.

Table A.6.8.3.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	Cell 1 is the PCell in <i>NR-Multi-RTT-ProvideAssistanceData</i> [34].
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in <i>NR-Multi-RTT-ProvideAssistanceData</i> [34].
RF Channel Number		1, 2, 3	1	For both Cell 1 and Cell 2
BW _{channel}	MHz	1	20: N _{RB,c} = 106	
		2	20: N _{RB,c} = 106	
		3	50: N _{RB,c} = 133	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CP length		1, 2, 3	Normal	
DRX cycle		1, 2, 3	1.28s	
Time offset between serving and neighbour cells	μs	1, 2, 3	3	Synchronous cells
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	10	

Table A.6.8.3.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1, 2, 3	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						

EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
PRS configuration		1	PRS.1.2 FR1		PRS.1.2 FR1	
		2	PRS.1.2 FR1		PRS.1.2 FR1	
		3	PRS.2.2 FR1		PRS.2.2 FR1	
PRS muting info		1, 2, 3	'10'		'01'	
SRS configuration		1	POS-SRS.1		N/A	
		2	POS-SRS.1		N/A	
		3	POS-SRS.2		N/A	
N_{oc} ^{Note 2}	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41	-Infinity	-12.12
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2	-Infinity	-10
		2				
		3				
PRP ^{Note 3}	dBm/SCS kHz	1	-Infinity	-100	-Infinity	-108
		2	-Infinity	-100	-Infinity	-108
		3	-Infinity	-97	-Infinity	-105
Io	dBm/19.08 MHz	1	N/A	-64.57	N/A	-64.57
	dBm/19.08 MHz	2		-64.57		-64.57
	dBm/47.88 MHz	3		-60.59		-60.59
Propagation Condition		1, 2, 3	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						

A.6.8.3.1.2 Test requirements

The UE Rx-Tx time difference measurement time in RRC_INACTIVE state fulfils the requirements specified in clause 5.6.4.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be higher than the time duration above because of the uncertainty in acquiring the first available PRACH occasion to transition to RRC_CONNECTED state to report the measurements.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.6.8.3.2 UE Rx-Tx time difference measurement with reduced number of samples in RRC_INACTIVE, FR1 SA

A.6.8.3.2.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 5.6.4.5 in AWGN propagation condition in FR1 in standalone scenario when single-sample measurements are requested by the LMF. This test is applicable to UEs that support *supportedDL-PRS-ProcessingSamples-RRC-Inactive*.

The supported test configurations in listed in Table A.6.8.3.2.1-1.

Table A.6.8.3.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR1.

The test consists of two consecutive time intervals, with duration of T1 and T2. The UE shall be in RRC_CONNECTED state during T1 and in RRC_INACTIVE state during T2. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2. PRS resources from both cells are transmitted within the initial DL BWP of the UE and with the same numerology as the initial DL BWP.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle in RRC_INACTIVE.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the multi-RTT assistance data and location information request.

The *nr-Multi-RTT-RequestLocationInformation* IE should indicate to the UE that single-sample measurements are requested, i.e. *requestedDL-PRS-ProcessingSamples-r17* is set to m1.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.6.8.3.2.1-2 and Table A.6.8.3.2.1-3 respectively.

Table A.6.8.3.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3	Cell 1	Cell 1 is the PCell in <i>NR-Multi-RTT-ProvideAssistanceData</i> [34].
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in <i>NR-Multi-RTT-ProvideAssistanceData</i> [34].
RF Channel Number		1, 2, 3	1	For both Cell 1 and Cell 2
BW _{channel}	MHz	1	20: N _{RB,c} = 106	
		2	20: N _{RB,c} = 106	
		3	50: N _{RB,c} = 133	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CP length		1, 2, 3	Normal	
DRX cycle length	s	1, 2, 3	1.28	
Time offset between serving and neighbour cells	μs	1, 2, 3	3	Synchronous cells
T1	s	1, 2, 3	3	
T2	s	1, 2, 3	5	

Table A.6.8.3.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
PRS configuration ^{Note 5}		1	PRS.1.2 FR1		PRS.1.2 FR1	
		2	PRS.1.2 FR1		PRS.1.2 FR1	
		3	PRS.2.2 FR1		PRS.2.2 FR1	
PRS Resource slot offset	slots	1, 2, 3	0		0	
PRS muting info		1, 2, 3	'10'		'01'	

N_{oc} Note 2	dBm/S CS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	0	-Infinity	-6
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	2.23	-Infinity	-1.73
		2				
		3				
PRS-RSRP Note 3	dBm/S CS kHz	1	-Infinity	-95.77	-Infinity	-99.73
		2	-Infinity	-95.77	-Infinity	-99.73
		3	-Infinity	-92.77	-Infinity	-96.73
SS-RSRP Note 3	dBm/S CS kHz	1	-98	-98	-98	-98
		2	-98	-98	-98	-98
		3	-95	-95	-95	-95
I_0 Note 3	dBm/19 .08 MHz	1	N/A	-61.71	N/A	-61.71
	dBm/19 .08 MHz	2		-61.71		-61.71
	dBm/47 .88 MHz	3		-57.73		-57.73
Propagation Condition		1, 2, 3	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP/PRS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves. I_0 levels apply only for symbols where PRS is transmitted.						
Note 4: OCNG shall be used such that all active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols, except for slots where PRS is transmitted by any of the cells.						
Note 5: Void.						

A.6.8.3.2.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 5.6.4.5.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be higher than the time duration above because of the uncertainty in acquiring the first available PRACH occasion to transition to RRC_CONNECTED state to report the measurements.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.6.8.4 PRS-RSRPP measurements

A.6.8.4.1 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR1 in RRC_INACTIVE state

A.6.8.4.1.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRPP measurement meets the delay requirements specified in clause 5.6.5.5 in an environment with two-tap channel.

The supported test configurations are specified in Table A.6.8.4.1.1-1.

Table A.6.8.4.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall be in RRC_CONNECTED state and shall not have any timing information of Cell 2. During T2 UE shall be in RRC_INACTIVE state and all both cells transmit PRS resources within initial DL BWP of the UE and with the same numerology as the initial DL BWP.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.8.4.1.1-2, and cell specific test parameters are listed in Table A.6.8.4.1.1-3.

Table A.6.8.4.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
BW _{channel}	MHz	1	20: N _{RB,c} = 106	
		2	20: N _{RB,c} = 106	
		3	50: N _{RB,c} = 133	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	

SMTC configuration		3	SSB.2 FR1	
		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CP length		1, 2, 3	Normal	
DRX	s	1, 2, 3	1.28	ON
Time offset between serving and neighbour cells	μ s	1, 2, 3	3	Synchronous cells
Expected RSTD	μ s	1, 2, 3	3	
Expected RSTD uncertainty	μ s	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	5	

Table A.6.8.4.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1		N/A	
Active UL BWP configuration		1, 2, 3	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.4 FR1		PRS.1.4 FR1	
		2	PRS.1.4 FR1		PRS.1.4 FR1	
		3	PRS.2.4 FR1		PRS.2.4 FR1	
PRS muting info		1, 2, 3	‘10’		‘01’	
N_{oc} ^{Note 2}	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41	-Infinity	-12.12
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2	-Infinity	-10
		2				
		3				
PRS-RSRP ^{Note 3}	dBm/SCS kHz	1	-Infinity	-100	-Infinity	-108
		2	-Infinity	-100	-Infinity	-108

		3	-Infinity	-97	-Infinity	-105
SS-RSRP ^{Note 3}	dBm/SCS kHz	1	-88	-88	-Infinity	-88
		2	-88	-88	-Infinity	-88
		3	-85	-85	-Infinity	-85
Io	dBm/19.08 MHz	1	N/A	-64.57	N/A	-64.57
	dBm/19.08 MHz	2		-64.57		-64.57
	dBm/47.88 MHz	3		-60.59		-60.59
Propagation Condition		1, 2, 3	Two-tap channel defined in 38.101-4 Annex B.2.4, $a = 1$, $\tau_d = 0.45 \mu s$ and $f_D = 5 \text{ Hz}$			
Note 1: The resources for uplink transmission are assigned after the end of time period T2 to UEs that do not support SDT for measurement reporting.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP/PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.8.4.1.2 Test Requirements

The UE shall perform and report the PRS-RSRPP measurements for Cell 1 and Cell 2, within the time limit specified in clause 5.6.5.5, starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be higher than the time duration above because of the uncertainty in acquiring the first available PRACH occasion to transition to RRC_CONNECTED state to report the measurements.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.8.4.2 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR1 in RRC_INACTIVE state for reduced number of samples

A.6.8.4.2.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRPP measurement meets the delay requirements specified in clause 5.6.5.5 in an environment with two-tap channel for reduced number of samples. In this test UE that supports *supportedDL-PRS-ProcessingSamples-RRC-Inactive* is configured by LMF to perform PRS measurement with reduced number of samples.

The supported test configurations are specified in Table A.6.8.4.2.1-1.

Table A.6.8.4.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall be in RRC_CONNECTED state and shall not have any timing information of Cell 2. During T2 UE shall be in RRC_INACTIVE state and both cells transmit PRS resources within initial DL BWP of the UE and with the same numerology as the initial DL BWP.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The general test parameters are listed in Table A.6.8.4.2.1-2, and cell specific test parameters are listed in Table A.6.8.4.2.1-3.

Table A.6.8.4.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Reference cell		1, 2, 3	Cell 1	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		1, 2, 3	Cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
RF Channel Number		1, 2, 3	1: Cell 1 and Cell 2	
BW _{channel}	MHz	1	20: N _{RB,c} = 106	
		2	20: N _{RB,c} = 106	
		3	50: N _{RB,c} = 133	
SSB configuration		1	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.2 FR1	
SMTC configuration		1	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CP length		1, 2, 3	Normal	
DRX	s	1, 2, 3	1.28	ON
Time offset between serving and neighbour cells	μs	1, 2, 3	3	Synchronous cells
Expected RSTD	μs	1, 2, 3	3	
Expected RSTD uncertainty	μs	1, 2, 3	5	
T1	s	1, 2, 3	2	
T2	s	1, 2, 3	5	

Table A.6.8.4.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
		1	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			

Dedicated CORESET RMC configuration		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3	OP.1			OP.1
TRS Configuration		1	TRS.1.1 FDD			N/A
		2	TRS.1.1 TDD			
		3	TRS.1.2 TDD			
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1			N/A
Active UL BWP configuration		1, 2, 3	ULBWP.1.1			N/A
PRS configuration		1	PRS.1.4 FR1			PRS.1.4 FR1
		2	PRS.1.4 FR1			PRS.1.4 FR1
		3	PRS.2.4 FR1			PRS.2.4 FR1
PRS BW		1,2,3	48 PRBs			48PRBs
PRS muting info		1, 2, 3	'10'			'01'
N_{oc} Note 2	dBm/SCS	1	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	0	-Infinity	-6
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	2.23	-Infinity	-1.73
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-Infinity	-95.77	-Infinity	-99.73
		2	-Infinity	-95.77	-Infinity	-99.73
		3	-Infinity	-92.77	-Infinity	-96.73
SS-RSRP Note 3	dBm/SCS kHz	1	-88	-100	-Infinity	-104
		2	-88	-100	-Infinity	-104
		3	-85	-97	-Infinity	-101
Io	dBm/19.08 MHz	1	N/A	-61.71	N/A	-61.71
	dBm/19.08 MHz	2		-61.71		-61.71
	dBm/47.88 MHz	3		-57.73		-57.73
Propagation Condition		1, 2, 3	Two-tap channel defined in 38.101-4 Annex B.2.4, $a = 1$, $\tau_d = 0.45 \mu s$ and $f_D = 5 \text{ Hz}$			
Note 1: The resources for uplink transmission are assigned after the end of time period T2 to UEs that do not support SDT for measurement reporting.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP/PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.8.4.2.2 Test Requirements

The UE shall perform and report the PRS-RSRPP measurements for Cell 1 and Cell 2, within the time limit specified in clause 5.6.5.5, starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be higher than the time duration above because of the uncertainty in acquiring the first available PRACH occasion to transition to RRC_CONNECTED state to report the measurements.

The rate of correct events observed during repeated tests shall be at least 90%.

A.6.9 Measurement performance requirements in RRC_INACTIVE

A.6.9.1 RSTD measurements

A.6.9.1.1 RSTD measurement accuracy test case for single positioning frequency layer in FR1 in RRC_INACTIVE state

A.6.9.1.1.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement in RRC_INACTIVE state meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.6.9.1.1.1-1.

Table A.6.9.1.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The UE is configured with DRX cycle of 1.28s. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 5.6.2.5.

Table A.6.9.1.1.1-2: RSTD accuracy test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN	1~3		freq1	Freq1	freq1	Freq1
BW _{channel}	1	MHz	20: N _{RB,c} = 106		20: N _{RB,c} = 106	
	2		20: N _{RB,c} = 106		20: N _{RB,c} = 106	
	3		50: N _{RB,c} = 133		50: N _{RB,c} = 133	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	

RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Time offset with Cell 1	1	μs	-	3	-	3
	2,3		-	3	-	3
SMTc configuration	1		SMTc.2		SMTc.2	
	2,3		SMTc.1		SMTc.1	
PRS configuration	1		PRS.1.3 FR1		PRS.1.4 FR1	
	2		PRS.1.3 FR1		PRS.1.4 FR1	
	3		PRS.2.3 FR1		PRS.2.4 FR1	
PRS muting info	1~3		'10'	'01'	'10'	'01'
Expected RSTD	1, 2, 3	μs	N/A	3	N/A	3
Expected RSTD uncertainty	1, 2, 3	μs	N/A	5	N/A	5
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
N_{oc} ^{Note2}	1,2	dBm/SCS	-98		-98	
	3		-95		-95	
$\hat{E}_s/I_{ot}$	1~3	dB	-6	-13	-6	-13
PRS-RSRP ^{Note3}	1,2	dBm/SCS	-103.7	-109.9	-103.7	-109.9
	3		-100.7	-106.9	-100.7	-106.9
I_o ^{Note3}	1,2	dBm/19.08M Hz	-65.70	-65.70	-65.70	-65.70
	3		dBm/	-61.72	-61.72	-61.72

		47.88M Hz				
$\hat{E}_s / N_{oc}$	1~3	dB	-5.7	-11.9	-5.7	-11.9
Propagation condition	1~3	-	AWGN		AWGN	
Antenna configuration	1~3		1x2		1x2	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5:	Void.					

A.6.9.1.1.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.6.9.1.2 RSTD measurement accuracy test case with reduced number of samples for single positioning frequency layer in FR1 in RRC_INACTIVE state

A.6.9.1.2.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement in RRC_INACTIVE state meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions. In this test UE that supports *supportedDL-PRS-ProcessingSamples-RRC-Inactive* is configured by LMF to perform PRS measurement with reduced number of samples.

The supported test configurations are specified in Table A.6.9.1.2.1-1.

Table A.6.9.1.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR1. The UE is configured with DRX cycle of 1.28s. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 5.6.2.5.

Table A.6.9.1.2.1-2: RSTD accuracy test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN	1~3		freq1	Freq1	freq1	Freq1
BW _{channel}	1	MHz	20: N _{RB,c} = 106		20: N _{RB,c} = 106	

	2		20: N _{RB,c} = 106		20: N _{RB,c} = 106	
	3		50: N _{RB,c} = 133		50: N _{RB,c} = 133	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 FDD	-	CR.2.1 FDD	-
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1		OP.1	
TRS configuration	1		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		-	
Time offset with Cell 1	1	μs	-	3	-	3
	2,3		-	3	-	3
SMTC configuration	1		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
PRS configuration	1		PRS.1.3 FR1		PRS.1.4 FR1	
	2		PRS.1.3 FR1		PRS.1.4 FR1	
	3		PRS.2.3 FR1		PRS.2.4 FR1	
PRS BW	1,2,3		52 PRBs for test 1			
PRS muting info	1~3		'10'	'01'	'10'	'01'
Expected RSTD	1, 2, 3	μs	N/A	3	N/A	3
Expected RSTD uncertainty	1, 2, 3	μs	N/A	5	N/A	5
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						

EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
N_{oc} ^{Note2}	1,2	dBm/SCS	-98		-98	
	3		-95		-95	
$\hat{E}_s/I_{ot}$	1~3	dB	-3	-6	-3	-6
PRS-RSRP ^{Note3}	1,2	dBm/SCS	-99.44	-101.65	-99.44	-101.65
	3		-96.44	-98.65	-96.44	-98.65
SS-RSRP ^{Note3}	1,2	dBm/SCS	-99.44	-101.65	-99.44	-101.65
	3		-96.44	-98.65	-96.44	-98.65
I_o ^{Note3}	1,2	dBm/19.08M Hz	-63.63	-63.63	-63.63	-63.63
	3	dBm/47.88M Hz	-59.65	-59.65	-59.65	-59.65
$\hat{E}_s/N_{oc}$	1~3	dB	-1.44	-3.65	-1.44	-3.65
Propagation condition	1~3	-	AWGN		AWGN	
Antenna configuration	1~3		1x2		1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: Void.						

A.6.9.1.2.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.6.9.2 PRS-RSRP measurements

A.6.9.2.1 SA: measurement accuracy with PRS in FR1 in RRC_INACTIVE

A.6.9.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRP measurement accuracy in RRC_INACTIVE is within the specified limits. This test will verify the requirements in clauses 10.1.24.2.1 and 10.1.24.2.2.

A.6.9.2.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.9.2.1.2-1. Both absolute and relative accuracy of PRS-RSRP measurements are tested by using the parameters in A.6.9.2.1.2-2. In all test cases, Cell 1 is the PCell.

Table A.6.9.2.1.2-1: PRS-RSRP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.9.2.1.2-2: PRS-RSRP test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW _{channel}	Config 1	MHz	20: N _{RB,c} = 106			
	Config 2		20: N _{RB,c} = 106			
	Config 3		50: N _{RB,c} = 133			
BWP BW	Config 1		20: N _{RB,c} = 106			
	Config 2		20: N _{RB,c} = 106			
	Config 3		50: N _{RB,c} = 133			
Downlink initial BWP configuration			DLBWP.0.1			
Uplink initial BWP configuration			ULBWP.0.1			
DRX Cycle		ms	1280			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD	
PRS configuration	Config 1		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
	Config 2		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
	Config 3		PRS.2.3 FR1	PRS.2.3 FR1	PRS.2.4 FR1	PRS.2.4 FR1

PRS Resource slot offset (slot)		Config 1,2,3	slot	0	4	0	4
SSB configuration		Config 1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
		Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
		Config 3		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1		Config 1	ms	-	3	-	3
		Config 2,3	μs	-	3	-	3
SMTc configuration		Config 1		SMTc.2			
		Config 2,3		SMTc.1			
OCNG Patterns				OCNG pattern 1			
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz			
		Config 3		30 kHz			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}	Config 1,2		dBm/15KhZ	-98		-98	
	Config 3			-98		-98	
N_{oc}^{Note2}	Config 1,2		dBm/SCS	-98		-98	

	Config 3			-95		-95	
$\hat{E}_s/I_{ot}$			dB	-2.41	-12.12	-2.41	-12.12
$\hat{E}_s/N_{oc}$			dB	-2	-10	-2	-10
PRS-RSRP Note3	Config 1, 2		dBm/SCS	-100	-108	-100	-108
	Config 3			-97	-105	-97	-105
IoNote3	Config 1,2		dBm/19.08MHz z	-64.57		-64.57	
	Config 3		dBm/47.88MHz z	-60.59		-60.59	
Propagation condition				AWGN			
Antenna configuration				1x2			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 5: Void.							
Note 6: Void							

A.6.9.2.1.3 Test Requirements

In each test, the absolute PRS-RSRP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.2.1. The relative PRS-RSRP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.2.2.

A.6.9.2.2 SA: measurement accuracy with PRS in FR1 with reduced number of samples in RRC_INACTIVE state

A.6.9.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRP measurement accuracy is within the specified limits provided that PRS is transmitted within the initial BWP of the UE. UE can support *supportedDL-PRS-ProcessingSamples-RRC-Inactive*, and the LMF indicates the UE to perform positioning measurements with reduced number of samples N_{sample} via *reducedDL-PRS-ProcessingSamples*. This test will verify the requirements in clauses 10.1.24.2.1 and 10.1.24.2.2.

A.6.9.2.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.9.2.2.2-1. Both absolute and relative accuracy of PRS-RSRP measurements are tested by using the parameters in A.6.9.2.2.2-2. In all test cases, Cell 1 is the PCell.

Table A.6.9.2.2-1: PRS-RSRP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.9.2.2-2: PRS-RSRP test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW _{channel}	Config 1	MHz	20: N _{RB,c} = 106			
	Config 2		20: N _{RB,c} = 106			
	Config 3		50: N _{RB,c} = 133			
BWP BW	Config 1		20: N _{RB,c} = 106			
	Config 2		20: N _{RB,c} = 106			
	Config 3		50: N _{RB,c} = 133			
Downlink initial BWP configuration			DLBWP.0.1			
Uplink initial BWP configuration			ULBWP.0.1			
DRX Cycle		s	1.28			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD	
PRS configuration	Config 1		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
	Config 2		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1

	Config 3		PRS.2.3 FR1	PRS.2.3 FR1	PRS.2.4 FR1	PRS.2.4 FR1
PRS BW	Config 1		52 PRBs	52 PRBs		
	Config 2		52 PRBs	52 PRBs		
	Config 3		48 PRBs	48 PRBs		
PRS Resource slot offset (slot)	Config 1,2,3	slot	0	4	0	4
SSB configuration	Config 1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1	ms	-	3	-	3
	Config 2,3	µs	-	3	-	3
SMTC configuration	Config 1		SMTC.2			
	Config 2,3		SMTC.1			
OCNG Patterns			OCNG pattern 1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
EPRE ratio of PRS to SSS						
N_{oc} ^{Note2}	Config 1,2	dBm/15Khz	-98		-98	
	Config 3					
N_{oc} ^{Note2}	Config 1,2	dBm/SCS	-98		-98	
	Config 3					
		-95		-95		
$\hat{E}_s/I_{ot}$		dB	0	-6	0	-6
$\hat{E}_s/N_{oc}$		dB	2.23	-1.73	2.23	-1.73
PRS-RSRP ^{Note3}	Config 1, 2	dBm/SCS	-95.77	-99.73	-95.77	-99.73
	Config 3		-92.77	-96.73	-92.77	-96.73
I_0 ^{Note3}	Config 1,2	dBm/19.08MHz	-61.71		-61.71	
	Config 3	dBm/47.88MHz	-57.73		-57.73	
Propagation condition			AWGN			

Antenna configuration		1x2
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.	
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.	
Note 3:	PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.	
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.	

A.6.9.2.2.3 Test Requirements

In each test, the absolute PRS-RSRP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.2.1. The relative PRS-RSRP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.2.2.

A.6.9.3 UE Rx-Tx time difference measurements

A.6.9.3.1.1 UE Rx-Tx time difference measurement accuracy in FR1 SA

A.6.9.3.1.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx time difference measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR1 in standalone scenario.

The supported test configurations in listed in Table A.6.9.3.1.1.1-1.

Table A.6.9.3.1.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR1.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test.

The UE is configured to transmit SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The test equipment then compares the difference of these two timings to the UE Rx-Tx measurement reported by the UE for each cell.

A.6.9.3.1.1.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.6.9.3.1.1.1-1.

Table A.6.9.3.1.1.1-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2

RF Channel Number		1,2,3	1	1	1	1
DRX	s	1,2,3	1.28		1.28	
Time offset with Cell 1	μs	1, 2, 3	N/A	3	N/A	3
TDD configuration		1	N/A	N/A	N/A	N/A
		2	TDDConf.1.1	TDDConf.1.1	TDDConf.1.1	TDDConf.1.1
		3	TDDConf.2.1	TDDConf.2.1	TDDConf.2.1	TDDConf.2.1
PDSCH RMC configuration		1	SR.1.1 FDD	N/A	SR.1.1 FDD	N/A
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD	N/A	CR.1.1 FDD	N/A
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	N/A	CCR.1.1 FDD	N/A
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3	OP.1	OP.1	OP.1	OP.1
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	N/A	DLBWP.0.1 ULBWP.0.1	N/A
PRS configuration		1	PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.2 FR1	PRS.1.2 FR1
		2	PRS.1.1 FR1	PRS.1.1 FR1	PRS.1.2 FR1	PRS.1.2 FR1
		3	PRS.2.1 FR1	PRS.2.1 FR1	PRS.2.2 FR1	PRS.2.2 FR1
PRS Resource slot offset	slot	1, 2, 3	0	4	0	4
SRS configuration		1	POS-SRS.1	N/A	POS-SRS.1	N/A
		2	POS-SRS.1	N/A	POS-SRS.1	N/A
		3	POS-SRS.2	N/A	POS-SRS.2	N/A
N_{oc} Note 2	dBm/SCS	1	-98		-98	
		2	-98		-98	
		3	-95		-95	
N_{oc} Note 2	dBm/15 kHz	1	-98		-98	
		2				
		3				
PRS $\hat{E}_s/I_{ot}$	dB	1	-2.41	-12.12	-2.41	-12.12
		2				
		3				
PRS $\hat{E}_s/N_{oc}$	dB	1	-2	-10	-2	-10
		2				
		3				
PRS-RSRP Note 3	dBm/SCS kHz	1	-100	-108	-100	-108
		2	-100	-108	-100	-108
		3	-97	-105	-97	-105

I _o	dBm/19.08 MHz	1	-64.57	-64.57	-64.57	-64.57
	dBm/19.08 MHz	2	-64.57	-64.57	-64.57	-64.57
	dBm/47.88 MHz	3	-60.59	-60.59	-60.59	-60.59
Propagation Condition		1, 2, 3	AWGN		AWGN	
Note 1: Void.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: PRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.6.9.3.1.1.3 Test requirements

The UE Rx-Tx time difference measurement time fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.2 for both Cell 1 and Cell 2.

A.6.9.3.2 UE Rx-Tx time difference measurement accuracy with reduced number of samples

A.6.9.3.2.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx time difference measurement accuracy with reduced number of samples in RRC_INACTIVE state is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR1 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations in listed in Table A.6.9.3.2.1-1.

Table A.6.9.3.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR1.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test. The UE is configured to measure UE Rx-Tx time difference using reduced number of samples via *requestedDL-PRS-ProcessingSamples* in *NR-Multi-RTT-RequestLocationInformation*.

UE shall be configured to enter into RRC_INACTIVE state before the start of the test.

The UE is configured to transmit positioning SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The test equipment then compares the difference of these two timings to the UE Rx-Tx measurement reported by the UE for each cell.

A.6.9.3.2.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.6.9.3.2.2-1.

Table A.6.9.3.2.2-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1	
			Cell 1	Cell 2
RF Channel Number		1,2,3	1	1
DRX cycle		1,2,3	1.28s	
Time offset with Cell 1	μs	1, 2, 3	N/A	3
TDD configuration		1	N/A	N/A
		2	TDDConf.1.1	TDDConf.1.1
		3	TDDConf.2.1	TDDConf.2.1
PDSCH RMC configuration		1	SR.1.1 FDD	N/A
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
RMSI CORESET RMC configuration		1	CR.1.1 FDD	N/A
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD	N/A
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
OCNG Patterns	dB	1, 2, 3	OP.1	OP.1
EPRE ratio of PSS to SSS		1, 2, 3	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
EPRE ratio of PRS to SSS				
TRS Configuration		1	TRS.1.1 FDD	N/A
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
Initial BWP configuration		1, 2, 3	DLBWP.0.1 ULBWP.0.1	N/A
PRS configuration		1	PRS.1.1 FR1	PRS.1.1 FR1
		2	PRS.1.1 FR1	PRS.1.1 FR1
		3	PRS.2.1 FR1	PRS.2.1 FR1
PRS BW		1	52 PRBs	52 PRBs
		2	52 PRBs	52 PRBs
		3	48 PRBs	48 PRBs
PRS Resource slot offset	slot	1, 2, 3	0	4
SRS configuration		1	POS-SRS.1	N/A
		2	POS-SRS.1	N/A
		3	POS-SRS.2	N/A

N_{oc} Note 2	dBm/SCS	1	-98	
		2	-98	
		3	-95	
N_{oc} Note 2	dBm/15 kHz	1	-98	
		2		
		3		
PRS $\hat{E}_s/I_{ot}$	dB	1	0	-6
		2		
		3		
PRS $\hat{E}_s/N_{oc}$	dB	1	2.23	-1.73
		2		
		3		
PRP Note 3	dBm/SCS kHz	1	-95.77	-99.73
		2	-95.77	-99.73
		3	-92.77	-96.73
Io	dBm/19.08 MHz	1	-61.71	-61.71
	dBm/19.08 MHz	2	-61.71	-61.71
	dBm/47.88 MHz	3	-57.73	-57.73
Propagation Condition		1, 2, 3	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: PRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.6.9.3.2.3 Test requirements

The UE Rx-Tx time difference measurement with reduced number of samples in RRC_INACTIVE state fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.2 for both Cell 1 and Cell 2.

A.6.9.4 PRS-RSRPP measurements

A.6.9.4.1 SA: PRS-RSRPP measurement accuracy in FR1 in RRC INACTIVE

A.6.9.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRPP measurement accuracy in FR1 in RRC_INACTIVE state is within the specified limits. This test will verify the requirements in clauses 10.1.38.2.

A.6.9.4.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.9.4.1.2-1.

Table A.6.9.4.1.2-1: PRS-RSRPP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.9.4.1.2-2: PRS-RSRPP test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW _{channel}	Config 1	MHz	20: N _{RB,c} = 106			
	Config 2		20: N _{RB,c} = 106			
	Config 3		50: N _{RB,c} = 133			
BWP BW	Config 1		20: N _{RB,c} = 106			
	Config 2		20: N _{RB,c} = 106			
	Config 3		50: N _{RB,c} = 133			
Downlink initial BWP configuration			DLBWP.0.1			
Uplink initial BWP configuration			ULBWP.0.1			
TRS configuration	Config 1		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX cycle length	Config 1,2,3	ms	1280			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD	
PRS configuration	Config 1		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
	Config 2		PRS.1.3 FR1	PRS.1.3 FR1	PRS.1.4 FR1	PRS.1.4 FR1
	Config 3		PRS.2.3 FR1	PRS.2.3 FR1	PRS.2.4 FR1	PRS.2.4 FR1
PRS Resource slot offset (slot)	Config 1,2,3	slot	0	4	0	4
SSB configuration	Config 1		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1	SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1	ms	-	3	-	3

		Config 2,3	μs	-	3	-	3
SMTC configuration		Config 1		SMTC.2			
		Config 2,3		SMTC.1			
OCNG Patterns				OCNG pattern 1			
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz			
		Config 3		30 kHz			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} ^{Note2}	Config 1,2		dBm/15KhZ	-98		-98	
	Config 3			-98		-98	
N_{oc} ^{Note2}	Config 1,2		dBm/SCS	-98		-98	
	Config 3			-95		-95	
$\hat{E}_s/I_{ot}$			dB	-2.41	-12.12	-2.41	-12.12
$\hat{E}_s/N_{oc}$			dB	-2	-10	-2	-10

PRS-RSRP Note3	Config 1, 2		dBm/SCS	-100	-108	-100	-108
	Config 3		dBm/SCS	-97	-105	-97	-105
Io ^{Note3}	Config 1,2		dBm/19.08M Hz	-64.57		-64.57	
	Config 3		dBm/47.88M Hz	-60.59		-60.59	
Propagation condition				Two-tap channel ^{Note 7}			
Antenna configuration				1x2			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 5: Void.							
Note 6: Void							
Note 7: The two-tap channel model is defined in 38.101-4 Annex B.2.4 ($\alpha = 1$, $\tau_d=0.45 \mu s$ and $f_D=5$ Hz).							

A.6.9.4.1.3 Test Requirements

In each test, the absolute PRS-RSRPP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.38.2.

A.6.9.4.2 SA: measurement accuracy with reduced PRS samples in FR1 in RRC INACTIVE

A.6.9.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRPP measurement accuracy with $N_{sample} = 1$ in FR1 in RRC_INACTIVE state is within the specified limits. This test will verify the requirements in clause 10.1.38.2. The UE under test should support *supportedDL-PRS-ProcessingSamples-RRC-Inactive*, and the TE indicates the UE to perform positioning measurements with reduced number of samples. The PRS bandwidth is contained within the initial DL BWP and the power difference between the serving cell SS-RSRP and neighbour cell PRS-RSRP is within 6dB, so that $N_{sample} = 1$ is assumed.

A.6.9.4.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.6.9.4.2.2-1. Both absolute and relative accuracy of PRS-RSRPP measurements are tested by using the parameters in A.6.9.4.2.2-2. In all test cases, Cell 1 is the PCell.

Table A.6.9.4.2.2-1: PRS-RSRPP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 20 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 50 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.6.9.4.2.2-2: PRS-RSRPP test parameters

Parameter		Unit	Test 1	
			Cell 1	Cell 2
Cell ID			489	0
SSB ARFCN			freq1	
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
BW _{channel}	Config 1	MHz	20: N _{RB,c} = 106	
	Config 2		20: N _{RB,c} = 106	
	Config 3		50: N _{RB,c} = 133	
BWP BW	Config 1		20: N _{RB,c} = 106	
	Config 2		20: N _{RB,c} = 106	
	Config 3		50: N _{RB,c} = 133	
Downlink initial BWP configuration			DLBWP.0.1	
Uplink initial BWP configuration			ULBWP.0.1	
TRS configuration	Config 1		TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA
DRX Cycle length	Config 1,2,3	ms	1280	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-
	Config 2		SR.1.1 TDD	
	Config 3		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	-
	Config 2		CR.1.1 TDD	
	Config 3		CR2.1 TDD	
Control channel RMC	Config 1		CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD	
PRS configuration	Config 1		PRS.1.4 FR1	PRS.1.4 FR1
	Config 2		PRS.1.4 FR1	PRS.1.4 FR1
	Config 3		PRS.2.4 FR1	PRS.2.4 FR1
PRS bandwidth	Config 1,2,3		52 PRBs	52 PRBs
PRS Resource slot offset (slot)	Config 1,2,3	slot	0	4
SSB configuration	Config 1		SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1
Time offset with Cell 1	Config 1	ms	-	3
	Config 2,3	μs	-	3
SMTC configuration	Config 1		SMTC.2	
	Config 2,3		SMTC.1	
OCNG Patterns			OCNG pattern 1	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz	
	Config 3		30 kHz	
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				

EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note2}	Config 1,2	dBm/15KHz	-98	
	Config 3			
N_{oc} ^{Note2}	Config 1,2	dBm/SCS	-98	
	Config 3		-95	
$\hat{E}_s/I_{ot}$		dB	0	-6
$\hat{E}_s/N_{oc}$		dB	2.23	-1.73
PRS-RSRP ^{Note3}	Config 1, 2	dBm/SCS	-95.77	-99.73
	Config 3		-92.77	-96.73
SS-RSRP ^{Note3}	Config 1, 2	dBm/SCS	-95.77	-99.73
	Config 3		-92.77	-96.73
I_o ^{Note3}	Config 1,2	dBm/19.08MH z	-61.71	
	Config 3	dBm/47.88MH z	-57.73	
Propagation condition			Two-tap channel ^{Note5}	
Antenna configuration			1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: PRS-RSRP, SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5: The two-tap channel model is defined in 38.101-4 Annex B.2.4 ($\alpha = 1$, $\tau_d=0.45 \mu s$ and $f_D=5$ Hz).				

A.6.9.4.2.3 Test Requirements

In each test, the absolute PRS-RSRPP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.38.2.

A.7 NR standalone tests with one or more NR cells in FR2

A.7.1 SA: RRC_IDLE state mobility

A.7.1.1 Cell re-selection to NR

A.7.1.1.1 Cell reselection to FR2 intra-frequency NR case

A.7.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements specified in clause 4.2.2.3.

A.7.1.1.1.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.7.1.1.1.2-1, A.7.1.1.1.2-2 and A.7.1.1.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.7.1.1.1.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.1.1.1.2-2: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
	Neighbour cell		1, 2	Cell2	
T2 end condition	Active cell		1, 2	Cell1	
	Neighbour cell		1, 2	Cell2	
Final condition	Active cell		1, 2	Cell1	
	Neighbour cell		1, 2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 μ s	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.1	
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	

T1		s	1, 2	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	PC2/3/4	s	1, 2	135	T2 needs to be defined so that cell re-selection reaction time is taken into account.
	PC1			265	
T3	PC2/3/4	s	1, 2	35	T3 needs to be defined so that cell re-selection reaction time is taken into account.
	PC1			65	

Table A.7.1.1.1.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			SR.3.1 TDD		
		2	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
		2	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
		2	CCR.3.1 TDD			CCR.3.1 TDD		
SSB configuration		1	SSB.3 FR2			SSB.7 FR2		
		2	SSB.4 FR2			SSB.8 FR2		
OCNG Pattern		1, 2	OP.4			OP.4		
BW _{channel}	MHz	1, 2	100: N _{RB,C} = 66			100: N _{RB,C} = 66		
Data RBs allocated		1, 2	66			66		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-138			-138		
		2	-135			-135		
Pcompensation	dB	1, 2	0			0		
Qhyst _s	dB	1, 2	0			0		
Qoffset _{s,n}	dB	1, 2	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		
AoA setup		1, 2	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
Beam assumption ^{Note 4}		1,2	Rough			Rough		
$\hat{E}_s / I_{ot\ BB}$ ^{Note 5}	dB	1	7.45	-3.55	0.95	-infinity	0.95	-3.55
		2						
N_{oc} ^{Note2}	dBm/SCS	1	-93					
		2	-90					
N_{oc} ^{Note2}	dBm/15 kHz	1	-102					
		2						
$\hat{E}_s / N_{oc}$	dB	1	8	-3	1.5	-infinity	1.5	-3
		2						

SS-RSRP ^{Note3}	dBm/SCS	1	-85	-96	-91.5	-infinity	-91.5	-96
		2	-82	-93	-88.5	-infinity	-88.5	-93
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-60.53	-67.40	-65.34	-69.17	-65.34	-67.40
		2	-57.52	-64.39	-62.33	-66.16	-62.33	-64.39
Treselection	s	1, 2	0	0	0	0	0	0
SintrasearchP	dB	1, 2	50			50		
Propagation Condition		1, 2	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over							
	N_{oc}							
Note 3:	subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 4:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation							
Note 6:	Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.							

A.7.1.1.1.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 130 s for PC2/3/4 devices and less than 258 s for PC1 devices.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than 27 s for PC2/3/4 devices and less than 53 s for PC1 devices.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{\text{detect, NR_Intra}} + T_{\text{SI-NR}}$, and to an already detected cell can be expressed as: $T_{\text{evaluate, NR_intra}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{detect, NR_Intra}}$ See Table 4.2.2.3-1 in clause 4.2.2.3

$T_{\text{evaluate, NR_intra}}$ See Table 4.2.2.3-1 in clause 4.2.2.3

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

For the cell re-selection delay to a newly detectable in this test case, this gives:

- 129.28 s, allow 130 s, for PC2/3/4 devices

2- 57.28 s, allow 258 s, for PC1 devices

For the cell re-selection delay to an already detected cell in this test case, this gives:

- 26.88 s, allow 27 s, for PC2/3/4 devices
- 52.48 s, allow 53 s, for PC1 devices

A.7.1.1.2 Cell reselection to FR2 inter-frequency NR case

A.7.1.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2.2.4.

A.7.1.1.2.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.7.1.1.2.2-1, A.7.1.1.2.2-2 and A.7.1.1.2.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.7.1.1.2.2-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.7.1.1.2.2-2: General test parameters for FR2 inter frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2	Cell1	
T1 end condition	Active cell		1, 2	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2	Cell2	
T3 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2	Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 μ s	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
			2	SSB.2 FR2	
SMTC configuration			1, 2	SMTC.1	
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	

T1	PC2/3/4	s	1, 2	35	T1 needs to be defined so that cell re-selection reaction time is taken into account.
	PC1			65	
T2		s	1, 2	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	PC2/3/4	s	1, 2	95	T3 needs to be defined so that cell re-selection reaction time is taken into account.
	PC1			125	

Table A.7.1.1.2.2-3: Cell specific test parameters for FR2 inter frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1, 2	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET parameters		1, 2	CR.3.1 TDD			CR.3.1 TDD		
RMSI CORESET RMC configuration		1, 2	CCR.3.1 TDD			CCR.3.1 TDD		
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-140			-140		
		2	-137			-137		
Pcompensation	dB	1, 2	0			0		
Qhysts	dB	1, 2	0			0		
Qoffsets _{s, n}	dB	1, 2	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		
AoA setup		1, 2	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
Beam assumption ^{Note 4}		1,2	Rough			Rough		
$\hat{E}_s / I_{ot\ BB}$ ^{Note 5}	dB	1	9.95	9.95	7.45	-11.05	-infinity	7.95
		2						
N_{oc} ^{Note2}	dBm/SCS	1	-93			-93		
		2	-90			-90		
N_{oc} ^{Note2}	dBm/15 kHz	1	-102			-102		
		2						
$\hat{E}_s / N_{oc}$	dB	1	10.5	10.5	8	-10.5	-infinity	8.5
		2						
SS-RSRP ^{Note3}	dBm/SCS	1	-82.5	-82.5	-85	-103.5	-infinity	-84.5
		2	-79.5	-79.5	-82	-100.5	-infinity	-81.5
Io	dBm/95.04 MHz	1, 2	-53.11	-53.11	-55.34	-63.61	-63.98	-54.91
Treselection	s	1, 2	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2	50			50		
Thresh _{x, highP}	dB	1, 2	48			48		
Thresh _{serving, lowP}	dB	1, 2	44			44		

Thresh _{X, lowP}	dB	1, 2	50	50
Propagation Condition		1, 2	AWGN	AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			
Note 5:	Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.			

A.7.1.1.2.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 87 s for PC2/3/4 devices and less than 113 s for PC1 devices.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 27 s for PC2/3/4 devices and less than 53 s for PC1 devices.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$, and to a lower priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$.

Where:

$T_{\text{higher_priority_search}}$ See clause 4.2.2.7

$T_{\text{evaluate, NR_inter}}$ See Table 4.2.2.4-1 in clause 4.2.2.4

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

For the cell re-selection delay to a higher priority cell in this test case, this gives:

- 86.88 s, allow 87 s, for PC2/3/4 devices
- 112.48 s, allow 113 s, for PC1 devices

For the cell re-selection delay to a lower priority cell in the test case, this gives:

- 26.88 s, allow 27 s, for PC2/3/4 devices

- 52.48 s, allow 53 s, for PC1 devices

A.7.1.1.3 Cell reselection to FR2 intra-frequency NR case for UE fulfilling low mobility relaxed measurement criterion

A.7.1.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE configured with relaxed measurement criterion specified in clause 4.2.2.9.2.

A.7.1.1.3.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.7.1.1.3.2-1, A.7.1.1.3.2-2 and A.7.1.1.3.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. During T1 and T2, only criteria *lowMobilityEvaluation* is configured and fulfilled, where $(S_{rxlev_{Ref}} - S_{rxlev}) < S_{SearchDeltaP}$. UE has not registered with network for the tracking area containing cell2.

Table A.7.1.1.3.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.1.1.3.2-2: General test parameters for FR2 intra-frequency NR cell re-selection test case for UE fulfilling low mobility criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2	Cell2	
T1 end condition	Active cell		1, 2	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2	Cell1	
Final condition	Active cell		1, 2	Cell1	The UE reselects to cell 1 during T2 period
	Neighbour cells		1, 2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 μ s	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC pattern 1	
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	100	
T2		s	1, 2	100	

Table A.7.1.1.3.2-3: Cell specific test parameters for FR2 intra-frequency NR cell re-selection test case in AWGN for UE fulfilling low mobility criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		SR.3.1 TDD	
		2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
		2	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
		2	CCR.3.1 TDD		CCR.3.1 TDD	
SSB configuration		1	SSB.3 FR2		SSB.7 FR2	
		2	SSB.4 FR2		SSB.8 FR2	
OCNG Pattern		1, 2	OP.4		OP.4	
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1, 2	66		66	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-137		-137	
S _{SearchDeltaP}	dB	1, 2	6		6	
T _{SearchDeltaP}	s	1,2	5		5	
P _{compensation}	dB	1, 2	0		0	
Q _{hyst_s}	dB	1, 2	0		0	
Q _{offset_{s, n}}	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption ^{Note 4}		1,2	Rough		Rough	
$\hat{E}_s/I_{ot\ BB}$ ^{Note 5}	dB	1	-3.55	0.95	0.95	-3.55
		2				
N_{oc} ^{Note2}	dBm/SCS	1	-93			
		2	-90			
N_{oc} ^{Note2}	dBm/15 kHz	1	-102			
		2				
$\hat{E}_s/N_{oc}$	dB	1	-3	1.5	1.5	-3
		2				
SS-RSRP ^{Note3}	dBm/SCS	1	-96	-91.5	-91.5	-96
		2	-93	-88.5	-88.5	-93
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-67.40	-65.34	-65.34	-67.40
		2	-64.40	-62.34	-62.34	-64.40
T _{reselection}	s	1, 2	0	0	0	0
SintrasearchP	dB	1, 2	50		50	
Propagation Condition		1, 2	AWGN			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over
Note 3:	subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5:	Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.1.1.3.3 Test Requirements

The cell reselection delay to an already detected cell for UE fulfilling low mobility relaxed criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected cell shall be less than 79 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detectable cell can be expressed as: $T_{\text{evaluate, NR_Intra}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{evaluate, NR_Intra}}$ See Table 4.2.2.9.2-1 in clause 4.2.2.9,

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 78.08 s, allow 79s for the cell re-selection delay to an already detected cell for UE fulfilling low mobility criterion in the test case.

A.7.1.1.4 Cell reselection to FR2 intra-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion

A.7.1.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE configured with relaxed measurement criterion specified in clause 4.2.2.9.3.

A.7.1.1.4.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.7.1.1.4.2-1, A.7.1.1.4.2-2 and A.7.1.1.4.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. During T1 and T2, only criteria *cellEdgeEvaluation* is configured and fulfilled, where $S_{rxlev} > S_{\text{SearchThresholdP}}$. UE has not registered with network for the tracking area containing cell2.

Table A.7.1.1.4.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.1.1.4.2-2: General test parameters for FR2 intra-frequency NR cell re-selection test case for UE fulfilling not-at-cell edge criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2	Cell2	
T1 end condition	Active cell		1, 2	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2	Cell1	
Final condition	Active cell		1, 2	Cell1	
	Neighbour cells		1,2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 μ s	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC pattern 1	
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	100	
T2		s	1, 2	100	

Table A.7.1.1.4.2-3: Cell specific test parameters for FR2 intra-frequency NR cell re-selection test case in AWGN for UE fulfilling not-at-cell edge criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		SR.3.1 TDD	
		2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
		2	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
		2	CCR.3.1 TDD		CCR.3.1 TDD	
SSB configuration		1	SSB.3 FR2		SSB.7 FR2	
		2	SSB.4 FR2		SSB.8 FR2	
OCNG Pattern		1, 2	OP.4		OP.4	
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1, 2	66		66	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-137		-137	
Pcompensation	dB	1, 2	0		0	
Qhyst _s	dB	1, 2	0		0	
Qoffset _{s,n}	dB	1, 2	0		0	

Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption ^{Note 4}		1,2	Rough		Rough	
$\hat{E}_s / I_{ot\ BB}$ ^{Note 5}	dB	1	-3.55	0.95	0.95	-3.55
		2				
N_{oc} ^{Note2}	dBm/SCS	1	-93			
		2	-90			
N_{oc} ^{Note2}	dBm/15 kHz	1	-102			
		2				
$\hat{E}_s / N_{oc}$	dB	1	-3	1.5	1.5	-3
		2				
SS-RSRP ^{Note3}	dBm/SCS	1	-96	-91.5	-91.5	-96
		2	-93	-88.5	-88.5	-93
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-67.40	-65.34	-65.34	-67.40
		2	-64.40	-62.34	-62.34	-64.40
Treselection	s	1, 2	0	0	0	0
S _{SearchThresholdP}		1, 2	35	35	35	35
S _{IntrasearchP}	dB	1, 2	50		50	
Propagation Condition		1, 2	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 5: Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.						

A.7.1.1.4.3 Test Requirements

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected cell shall be less than 79 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detected cell can be expressed as: $T_{\text{evaluate, NR_Intra}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{evaluate, NR_Intra}}$ See Table 4.2.2.9.3-1 in clause 4.2.2.9,

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 78.08 s, allow 79s for the cell re-selection delay to an already detected cell for UE fulfilling not-at-cell edge criterion in the test case.

A.7.1.1.5 Cell reselection to FR2 inter-frequency NR case for UE fulfilling low mobility relaxed measurement criterion

A.7.1.1.5.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for UE fulfilling low mobility criterion specified in clause 4.2.2.10.2.

A.7.1.1.5.2 Test Parameters

The test scenario comprises of 2 cells (Cell 1 and Cell 2) on 2 different NR carriers respectively as given in tables A.7.1.1.5.2-1, A.7.1.1.5.2-2 and A.7.1.1.5.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2. Cell 2 is of higher priority than Cell 1. The UE is configured with *lowMobilityEvaluation* criterion [2].

Table A.7.1.1.5.2-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.7.1.1.5.2-2: General test parameters for FR2 inter frequency NR cell re-selection test case for UE fulfilling low mobility criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell2 and fulfils low mobility (<i>lowMobilityEvaluation</i> [2]) criterion.
	Neighbour cell		1, 2	Cell1	
T1 final condition	Active cell		1, 2	Cell1	The UE reselects to low priority cell1 during T1
	Neighbour cell		1, 2	Cell2	
T2 final condition	Active cell		1, 2	Cell2	The UE reselects to high priority cell2 during T2
	Neighbour cell			Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 μ s	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
			2	SSB.2 FR2	
SMTTC configuration			1, 2	SMTTC pattern 1	
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2

rangeToBestCell		1, 2	Not configured	
T1	s	1, 2	85	T1 needs to be long enough to allow cell re-selection to already known cell1
T2	s	1, 2	85	T2 needs to be long enough to allow cell re-selection to already known cell2

Table A.7.1.1.5.2-3: Cell specific test parameters for FR2 inter frequency NR cell re-selection test case in AWGN for UE fulfilling low mobility criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1, 2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET parameters		1, 2	CR.3.1 TDD		CR.3.1 TDD	
RMSI CORESET RMC configuration		1, 2	CCR.3.1 TDD		CCR.3.1 TDD	
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1, 2	66		66	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-137		-137	
Pcompensation	dB	1, 2	0		0	
Qhyst _s	dB	1, 2	0		0	
Qoffset _{s,n}	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption ^{Note 4}		1, 2	Rough		Rough	
$\hat{E}_s / I_{ot, BB}$ ^{Note 5}	dB	1, 2	9.95	7.45	-11.05	7.95
N_{oc} ^{Note 2}	dBm/SCS	1	-93		-93	
		2	-90		-90	
N_{oc} ^{Note 2}	dBm/15 kHz	1, 2	-102		-102	
$\hat{E}_s / N_{oc}$	dB	1, 2	10.5	8	-10.5	8.5
SS-RSRP ^{Note 3}	dBm/SCS	1	-82.5	-85	-103.5	-84.5
		2	-79.5	-82	-100.5	-81.5
Io	dBm/95.04 MHz	1, 2	-53.14	-55.37	-63.64	-54.94
TreselectionNR	s	1, 2	0		0	
SnonintrasearchP	dB	1, 2	50		Not sent	
SsearchDeltaP	dB	1, 2	6		6	
TsearchDeltaP	s	1, 2	5		5	
Thresh _{x, highP}	dB	1, 2	48		48	
Thresh _{serving, lowP}	dB	1, 2	44		44	
Thresh _{x, lowP}	dB	1, 2	50		50	

Propagation Condition		1, 2	AWGN	AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over			
Note 3:	subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 4:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			
Note 5:	Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.			

A.7.1.1.5.3 Test Requirements

The cell reselection delay to an already detected low priority cell (Cell 1) for UE fulfilling low mobility criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected low priority cell, Cell 1, shall be less than 79 s.

The cell reselection delay to an already detected high priority cell (Cell 2) for UE fulfilling low mobility criterion is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected high priority cell, Cell 2, shall be less than 79 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE 1: The cell re-selection delay to an already detected low priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$

NOTE 2: The cell re-selection delay to an already detected higher priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$

Where:

$T_{\text{evaluate, NR_inter}}$ See Table 4.2.2.10.2-1 in clause 4.2.2.10.2

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 78.08 s, allow 79 s for the cell re-selection delay to an already detected low priority cell for UE fulfilling low mobility criterion in the test case.

This gives a total of 78.08 s, allow 79 s for the cell re-selection delay to an already detected high priority cell for UE fulfilling low mobility criterion in the test case.

A.7.1.1.6 Cell reselection to FR2 inter-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion

A.7.1.1.6.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for UE fulfilling not-at-cell edge criterion specified in clause 4.2.2.10.3.

A.7.1.1.6.2 Test Parameters

The test scenario comprises of 2 cells (Cell 1 and Cell 2) on 2 different NR carriers respectively as given in tables A.7.1.1.6.2-1, A.7.1.1.6.2-2 and A.7.1.1.6.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2. Cell 2 is of higher priority than Cell 1. The UE is configured with *cellEdgeEvaluation* criterion [2].

Table A.7.1.1.6.2-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.7.1.1.6.2-2: General test parameters for FR2 inter frequency NR cell re-selection test case for UE fulfilling not-at-cell edge criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell2 and fulfils not-at-cell edge (<i>cellEdgeEvaluation</i> [2]) criterion.
	Neighbour cell		1, 2	Cell1	
T1 final condition	Active cell		1, 2	Cell1	The UE reselects to low priority cell1 during T1
	Neighbour cell		1, 2	Cell2	
T2 final condition	Active cell		1, 2	Cell2	The UE reselects to high priority cell2 during T2
	Neighbour cell		1, 2	Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 μ s	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
			2	SSB.2 FR2	
SMTTC configuration			1, 2	SMTTC pattern 1	
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	85	T1 needs to be long enough to allow cell re-selection to already known cell.
T2		s	1, 2	85	T2 needs to be long enough to allow cell re-selection to already known cell.

Table A.7.1.1.6.2-3: Cell specific test parameters for FR2 inter frequency NR cell re-selection test case in AWGN for UE fulfilling not-at-cell edge criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	

PDSCH RMC configuration		1, 2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET parameters		1, 2	CR.3.1 TDD		CR.3.1 TDD	
RMSI CORESET RMC configuration		1, 2	CCR.3.1 TDD		CCR.3.1 TDD	
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1, 2	66		66	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-137		-137	
Pcompensation	dB	1, 2	0		0	
Qhysts	dB	1, 2	0		0	
Qoffsets _{s, n}	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption ^{Note 4}		1, 2	Rough		Rough	
$\hat{E}_s/I_{ot\ BB}$ ^{Note 5}	dB	1, 2	9.95	7.45	-11.05	7.95
N_{oc} ^{Note 2}	dBm/SCS	1	-93		-93	
		2	-90		-90	
N_{oc} ^{Note 2}	dBm/15 kHz	1, 2	-102		-102	
$\hat{E}_s/N_{oc}$	dB	1, 2	10.5	8	-10.5	8.5
SS-RSRP ^{Note 3}	dBm/SCS	1	-82.5	-85	-103.5	-84.5
		2	-79.5	-82	-100.5	-81.5
I _o S _{SearchThresholdP}	dBm/95.04 MHz	1, 2	-53.14	-55.37	-63.64	-54.94
		1, 2	35	35	29	29
TreselectionNR	s	1, 2	0		0	
SnonintrasearchP	dB	1, 2	50		Not sent	
Thresh _{x, highP}	dB	1, 2	48		48	
Thresh _{serving, lowP}	dB	1, 2	44		44	
Thresh _{x, lowP}	dB	1, 2	50		50	
Propagation Condition		1, 2	AWGN		AWGN	

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over

subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Note 5: Calculation of $\hat{E}_s/I_{ot\ BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.1.1.6.3 Test Requirements

The cell reselection delay to an already detected low priority cell (Cell 1) for UE fulfilling not-at-cell edge criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected low priority cell, Cell 1, shall be less than 79 s.

The cell reselection delay to an already detected high priority cell (Cell 2) for UE fulfilling not-at-cell edge criterion is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected high priority cell, Cell 2, shall be less than 79 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE 1: The cell re-selection delay to an already detected low priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$

NOTE 2: The cell re-selection delay to an already detected higher priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$

Where:

$T_{\text{evaluate, NR_inter}}$ See Table 4.2.2.10.3-1 in clause 4.2.2.10.3

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 78.8 s, allow 79 s for the cell re-selection delay to an already detected low priority cell for UE fulfilling not-at-cell edge criterion in the test case.

This gives a total of 78.08 s, allow 79 s for the cell re-selection delay to an already detected high priority cell for UE fulfilling not-at-cell edge criterion in the test case.

A.7.1.1.7 Cell reselection to FR2 intra-frequency NR case for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*

A.7.1.1.7.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements specified in clause 4.2.2.3 for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17*.

A.7.1.1.7.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.7.1.1.7.2-1, A.7.1.1.7.2-2 and A.7.1.1.7.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.7.1.1.7.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.1.1.7.2-2: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
T2 end condition	Active cell		1, 2	Cell2	
	Neighbour cell		1, 2	Cell1	
Final condition	Active cell		1, 2	Cell1	
	Neighbour cell		1, 2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 μ s	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.1	
DRX cycle length		s	1, 2	0.32	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
<i>highSpeedMeasFlagFR2-r17</i>				Set 1	
T1		s	1, 2	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	1, 2	10	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3		s	1, 2	5	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.7.1.1.7.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			SR.3.1 TDD		
		2	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
		2	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
		2	CCR.3.1 TDD			CCR.3.1 TDD		
SSB configuration		1	SSB.3 FR2			SSB.7 FR2		
		2	SSB.4 FR2			SSB.8 FR2		
OCNG Pattern		1, 2	OP.4			OP.4		
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66			100: N _{RB,c} = 66		

Data RBs allocated		1, 2	66			66		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-138			-138		
		2	-135			-135		
Pcompensation	dB	1, 2	0			0		
Qhyst _s	dB	1, 2	0			0		
Qoffset _{s, n}	dB	1, 2	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		
AoA setup		1, 2	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s/I_{ot}$	dB	1	8	-3	1.5	-infinity	1.5	-3
		2						
Beam assumption ^{Note₄}		1,2	Rough					
N_{oc} ^{Note2}	dBm/SCS	1	-93					
		2	-90					
N_{oc} ^{Note2}	dBm/15 kHz	1	-102					
		2						
$\hat{E}_s/N_{oc}$	dB	1	8	-3	1.5	-infinity	1.5	-3
		2						
SS-RSRP ^{Note3}	dBm/SCS	1	-85	-96	-91.5	-infinity	-91.5	-96
		2	-82	-93	-88.5	-infinity	-88.5	-93
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-59.37	-63.40	-62.47	-64.01	-62.47	-63.40
		2	-57.18	-62.86	-61.67	-64.01	-61.67	-62.86
Treselection	s	1, 2	0	0	0	0	0	0
SintrasearchP	dB	1, 2	50			50		
Propagation Condition		1,2	AWGN			AWGN 19444Hz;		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.								

A.7.1.1.7.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 7 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the

RRCSetupRequest message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than 4 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{\text{detect, NR_Intra}} + T_{\text{SI-NR}}$, and to an already detected cell can be expressed as: $T_{\text{evaluate, NR_intra}} + T_{\text{SI-NR}}$.

Where:

$T_{\text{detect, NR_Intra}}$ See Table 4.2.2.3-3 in clause 4.2.2.3

$T_{\text{evaluate, NR_intra}}$ See Table 4.2.2.3-3 in clause 4.2.2.3

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 6.4 s, allow 7 s for the cell re-selection delay to a newly detectable cell and 3.2 s for the cell re-selection delay to an already detected cell in the test case, which we allow 4 s.

A.7.2 SA: RRC_INACTIVE state mobility

A.7.2.1 Small Data Transmission

A.7.2.1.1 TA validation for CG-SDT in FR2

A.7.2.1.1.1 Test Purpose and Environment

The purpose of this test is to partly verify that the UE properly perform TA validation for CG-SDT transmission in clause 5.5.3. In the test, UE is configured two CG-SDT configurations when entering/during RRC Inactive state. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. There is one cell, which is the active NR cell in FR1. Figure A.7.2.1.1.1-1 shows the variation of the RSRP over the duration of the entire test, both sub-tests included.

Prior to the time point TA, the UE shall be fully synchronized to PCell (Cell 1), be registered to the cell and have entered RRC connected mode.

Before starting the test at time point TA, test equipment configures RSRP to P0. At time point TB, RSRP is changed from P0 to P1.

At time point TC which is W1 after time point TB, UE expect to receive RRC release with CG SDT configuration and RRC status is changed to INACTIVE status.

At time point TD, RSRP is changed from P1 to P0.

At time point TE, RSRP is changed from P0 to P2. TE must be W2 before TF.

Test equipment triggers UL data arrival at UE lower layer at time point TF. After time point TF, test equipment observes whether UE transmits with CG-SDT no later than TG which is W3 after TF.

At time point TH which is 100ms after TG, UE expect to receive a RRC release with CG-SDT configurations.

At time point TI, RSRP is changed from P2 to P0. TI is TH+W1.

Test equipment triggers the UL data arrival at UE lower layer at time point TJ. TJ is 3520ms after TI.

W1 equals to 480ms and W2 equals to 480ms based on requirements in clause 5.5.3. W3 is 1060ms.

Supported test configurations are shown in table A.7.2.1.1.1-1. The test parameters are given in Tables A.7.2.1.1.1-2 and A.7.2.1.1.1-3.

Table A.7.2.1.1.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.7.2.1.1.1-2: General test parameters for TA validation for CG-SDT in FR2

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
BW _{channel}	Config 1	MHz	100: N _{RB,C} = 66
DL initial BWP configuration	Config 1		DLBWP.0.1
UL initial BWP configuration	Config 1		ULBWP.0.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
SSB Configuration	Config 1		SSB.3 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	120
PRACH Configuration	Config 1		Table A.3.8.3.4
OCNG parameters			OP.5
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
DRX		s	0.64
cg-SDT-RSRP-ThresholdSSB		dBm	-110
cg-SDT-RSRP-ChangeThreshold		dB	8
cg-SDT-TimeAlignmentTime			infinity
CG-SDT resource period		ms	320
T1		s	0.8
T2		s	0.96
T3		s	3.04
T4		s	1.54
T5		s	1.76
T6		s	4.58

Table A.7.2.1.1.1-3: Cell specific test parameters TA validation for CG-SDT in FR2

Parameter	Unit	Test 1					
		T1	T2	T3	T4	T5	T6
AoA setup		Setup 1 defined in A.3.15					
Assumption for UE beams ^{Note 4}		Rough					
EPRE ratio of PDCCH DMRS to SSS	dB	4					
EPRE ratio of PDCCH to PDCCH DMRS	dB	0					

EPRE ratio of PBCH DMRS to SSS		dB	0					
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
N_{oc}	Config 1	dBm/15kHz	-100					
N_{oc}	Config 1	dBm/SCS	-100					
$\hat{E}_s / I_{ot}$	Config 1	dB	0	13	0	24.5	24.5	0
$\hat{E}_s / N_{oc}$	Config 1	dB	0	13	0	24.5	24.5	0
SS-RSRP	Config 1	dBm/SCS	-100	-87	-100	-75.5	-75.5	-100
Io	Config 1	dBm/95.04 MHz	-68	-57.8	-68	-46.50	-46.50	-68
Propagation condition			AWGN					
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.								
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 4: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.								

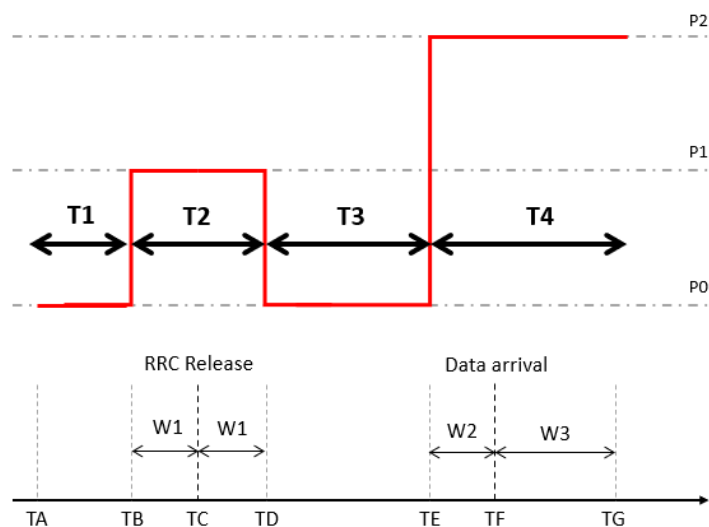


Figure A.7.2.1.1.1-1: RSRP variation for TA validation for CG-SDT Sub-test#1

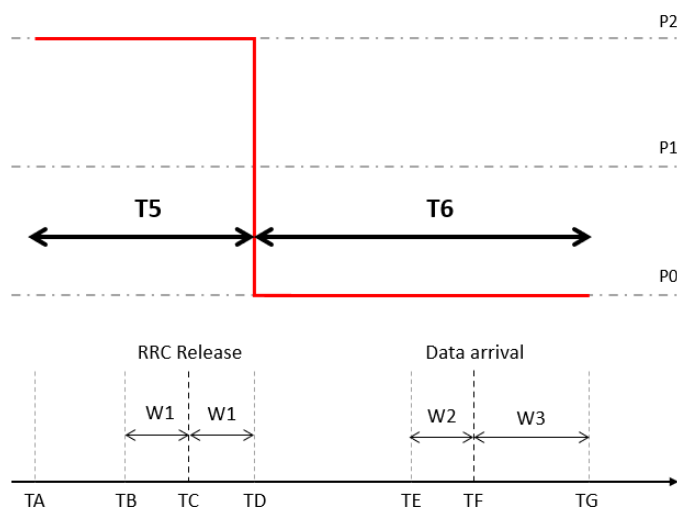


Figure A.7.2.1.1.1-2: RSRP variation for TA validation for CG-SDT Sub-test#2

A.7.2.1.1.2 Test Requirements

The UE behaviour in each test during time durations shall be as follows:

During Sub-test#1, UE shall transmit UL data with CG-SDT within 1060ms after time point TF.

During Sub-test#2, after passing Sub-test#1, UE shall not transmit UL data with CG-SDT.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.3 RRC_CONNECTED state mobility

A.7.3.1 Handover

A.7.3.1.1 Inter-frequency handover from FR1 to FR2; unknown target cell

A.7.3.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR2 inter frequency handover requirements specified in clause 6.1.1.5.

A.7.3.1.1.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.1.2-2, and A.7.3.1.1.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.1.2-1: Inter-frequency handover from FR1 to FR2 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.1.2-2: General test parameters Inter-frequency handover from FR1 to FR2

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 10	

Table A.7.3.1.1.2-3: Cell specific test parameters for NR FR1-FR2 Inter frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams ^{Note 6}			N/A		Rough	
AoA setup			NA		Setup 1 as defined in A.3.15	
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD		TDD	
	Config 2,3		TDD		TDD	
TDD configuration	Config 1		Not Applicable		TDDConf.3.1	
	Config 2		TDDConf.1.1		TDDConf.3.1	
	Config 3		TDDConf.2.1		TDDConf.3.1	
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
	Config 2		10: N _{RB,c} = 52		100: N _{RB,c} = 66	
	Config 3		40: N _{RB,c} = 106		100: N _{RB,c} = 66	
BWP BW	Config 1	MHz	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
	Config 2		10: N _{RB,c} = 52		100: N _{RB,c} = 66	
	Config 3		40: N _{RB,c} = 106		100: N _{RB,c} = 66	
Data RBs allocated	Config 1		52		66	
	Config 2		52		66	
	Config 3		106		66	
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD		SR3.1 TDD	
	Config 2		SR.1.1 TDD		SR3.1 TDD	
	Config 3		SR2.1 TDD		SR3.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD		CR3.1 TDD	
	Config 2		CR.1.1 TDD		CR3.1 TDD	
	Config 3		CR2.1 TDD		CR3.1 TDD	
Control Channel RMC	Config 1		CCR.1.1 FDD		CCR.3.1 TDD	
	Config 2		CCR.1.1 TDD		CCR.3.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.3.1 TDD	

OCNG Patterns			OP 1		
SSB configuration	Config 1,2		SSB.1 FR1	SSB. 3 FR2	
	Config 3		SSB.2 FR1	SSB. 3 FR2	
SMTC configuration	Config 1,2		SMTC.1	SMTC.1	
	Config 3		SMTC.2	SMTC.1	
SMTC configuration	Config 1,2		SMTC.1	SMTC.1	
	Config 3		SMTC.2	SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz	120 kHz	
	Config 3		30 kHz	120 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz	120 kHz	
	Config 3		30 kHz	120 kHz	
PRACH configuration			FR1 PRACH configuration 1	FR2 PRACH configuration 1	
TRS configuration	Config 1		TRS.1.1 FDD	TRS.2.1 TDD	
	Config 2		TRS.1.1 TDD	TRS.2.1 TDD	
	Config 3		TRS.1.2 TDD	TRS.2.1 TDD	
PDSCH/PDCCH TCI state			N/A	TCI.State.2	
BWP configuraiton	Initial DL BWP		DLBWP.0.1	DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} ^{Note2}		dBm/15kHz z	Link only, see clause A.3.7A	-104.7	
N_{oc} ^{Note2}	Config 1,2	dBm/SCS		-95.7	
	Config 3			-95.7	
$\hat{E}_s / I_{ot}$		dB		-Infinity	10
$\hat{E}_s / N_{oc}$		dB		-Infinity	10
I_o ^{Note3}	Config 1,2	dBm/ BW		-66.7	-56.3
	Config 3	dBm/ BW		-66.7	-56.3
Propagation condition		-	AWGN		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone				
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.3.1.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 572 ms from the beginning of time period T2. The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{\text{interrupt}}$, where:

RRC procedure delay = [10] ms and is specified in clause 12 in TS 38.331 [2].

$T_{\text{interrupt}}$ = 562 ms in the test. $T_{\text{interrupt}}$ is defined in clause 6.1.1.5.2.

This gives a total of 572 ms.

A.7.3.1.2 Intra-frequency handover from FR2 to FR2; unknown target cell

A.7.3.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-NR FR2 intra frequency handover requirements specified in clause 6.1.1.4.

A.7.3.1.2.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.2.2-2, and A.7.3.1.2.2-3.

The test scenario comprises of two cells on same carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.2.2-1: Intra-frequency handover from FR2 to FR2 test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.1.2.2-2: General test parameters Intra-frequency handover from FR2 to FR2

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 10	

Table A.7.3.1.2.2-3: Cell specific test parameters for NR FR2-FR2 Intra frequency handover test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Assumption for UE beams ^{Note 6}		Rough		Rough	
AoA setup		Setup 1 as defined in A.3.15			
NR RF Channel Number		1		1	
Duplex mode		TDD			

TDD configuration			TDDConf.3.1			
BW _{channel}		MHz	100: N _{RB,c} = 66			
BWP BW		MHz	100: N _{RB,c} = 66			
Data RBs allocated			66			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR3.1 TDD			
RMSI CORESET Reference Channel			CR3.1 TDD			
Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			O P. 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration			SSB. 3 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuraiton	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}		dBm/15kHz	-104.7			
N_{oc}^{Note2}		dBm/SCS	-95.7			
$\hat{E}_s/I_{ot}$		dB	6	-1.8	-Infinity	0
$\hat{E}_s/N_{oc}$		dB	6	6	-Infinity	7
I_o^{Note3}		dBm/BW	-59.7	-56.7	-59.7	-56.7
Propagation condition		-	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.3.1.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 232 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{\text{interrupt}} = 222$ ms in the test. $T_{\text{interrupt}}$ is defined in clause 6.1.1.4.2.

This gives a total of 232 ms.

A.7.3.1.3 Inter-frequency handover from FR2 to FR2; unknown target cell

A.7.3.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-NR FR2 inter frequency handover requirements specified in clause 6.1.1.4.

A.7.3.1.3.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.3.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.3.2-2, and A.7.3.1.3.2-3.

The test scenario comprises of carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.3.2-1: Inter-frequency handover from FR2 to FR2 test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.1.3.2-2: General test parameters Inter-frequency handover from FR2 to FR2

Parameter	Unit	Value	Comment
Initial conditions			
Active cell		Cell 1	
Neighbouring cell		Cell 2	
Final condition		Cell 2	
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 10	

Table A.7.3.1.3.2-3: Cell specific test parameters for NR FR2-FR2 Inter frequency handover test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Assumption for UE beams ^{Note 6}		Rough		Rough	
AoA setup		Setup 1as defined in A.3.15			
NR RF Channel Number		1		2	
Duplex mode		TDD			
TDD configuration		TDDConf.3.1			
BW _{channel}	MHz	100: N _{RB,c} = 66			
BWP BW	MHz	100: N _{RB,c} = 66			
Data RBs allocated		66			
DRx Cycle	ms	Not Applicable			
PDSCH Reference measurement channel		SR3.1 TDD			
RMSI CORESET Reference Channel		CR3.1 TDD			
Control Channel RMC		CCR.3.1 TDD			
OCNG Patterns		O P. 1			

SMTC Configuration			SMTC pattern 1			
SSB Configuration			SSB. 3 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuraiton	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}		dBm/15kHz	-104.7		-104.7	
N_{oc}^{Note2}		dBm/SCS	-95.7		-95.7	
$\hat{E}_s / I_{ot}$		dB	5	5	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	5	5	-Infinity	5
I_o^{Note3}	Config 1,2	dBm/BW	-60.5	-60.5	-66.7	-60.5
Propagation condition		-	AWGN		AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone					
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.3.1.3.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 552 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 542 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.4.2.

This gives a total of 552 ms.

A.7.3.1.4 Inter-band inter-frequency synchronous DAPS handover from FR1 to FR2

A.7.3.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the FR1-to-FR2 Inter-band inter-frequency synchronous DAPS handover requirements specified in clause 6.1.3.4.

A.7.3.1.4.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.4.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.4.2-2, A.7.3.1.4.2-3 and A.7.3.1.4.2-4.

The test scenario comprises of two bands each with one cell. The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively.

Before the start of T1, the UE is connected to Cell 1 (source PCell) on radio channel 1 but is not aware of Cell 2 (neighbour cell) on radio channel 2. The UE shall be configured with periodic CSI reporting for cell1. During T1, the UE shall not have any timing information of Cell 2.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event A4 is configured for neighbour cell (Cell 2), and the UE is configured with the measurement gaps (gap pattern ID # 0). Starting T2, Cell 2 becomes known to the UE. During T2, the UE shall report Event A4. After receiving the Event A4, the test system shall send a RRC message implying DAPS handover to the UE.

The start of T3 is the instant when the test system receives the ACK of the PDSCH corresponding to the last TTI containing the RRC message implying DAPS handover to Cell 2 (target PCell) sent to the UE. During T3, the UE shall be able to perform random access to Cell 2. DL schedule and UL feedback to cell 1 shall be avoided when UE is required to perform DL reception or UL transmission in PRACH procedure in cell 2, except preamble transmission. After the RACH procedure is completed, the test system shall send a RRC message to the UE to release Cell 1 (source cell) on radio channel 1.

The start of T4 is the instant when the test system receives the ACK of the PDSCH corresponding to the last TTI containing the RRC message implying source cell release sent to the UE. During T4, the UE shall perform source cell release.

Starting T5, the UE shall stop sending CSI report to the source cell.

Table A.7.3.1.4.2-1: Inter-band inter-frequency synchronous DAPS handover from FR1 to FR2 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.4.2-2: General test parameters for Inter-band inter-frequency synchronous DAPS handover from FR1 to FR2

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
A4-Threshold	dBm	-120	
Hysteresis	dB	0	
Time To Trigger	s	0	

Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells	μs	33	Synchronous cells
T1	s	5	
T2	s	<5	
T3	s	<0.5	
T4	ms	$10+T_{\text{interrupt2}}$	$T_{\text{interrupt2}}$ as defined in Table 6.1.3.4.2-2 for synchronous DAPS HO
T5	ms	100	

Table A.7.3.1.4.2-3: Cell specific test parameters for Inter-band inter-frequency synchronous DAPS handover from FR1 to FR2 (Cell 1 in FR1)

Parameter		Unit	Cell 1	
			T1	T2 - T5
NR RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
BW_{channel}	Config 1	MHz	10: $N_{RB,c} = 52$	
	Config 2		10: $N_{RB,c} = 52$	
	Config 3		40: $N_{RB,c} = 106$	
BWP BW	Config 1	MHz	10: $N_{RB,c} = 52$	
	Config 2		10: $N_{RB,c} = 52$	
	Config 3		40: $N_{RB,c} = 106$	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
OCNG Patterns			OP.1	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
reportConfigType			periodic	
reportQuantity			cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2	slot	5	
	Config 3		10	
CSI reporting offset	Config 1,2	slot	3	
	Config 3		5	
SSB Configuration	Config 1,2		SSB.1 FR1	
	Config 3		SSB.2 FR1	
SMTc Configuration	Config 1,2		SMTc.1	
	Config 3		SMTc.2	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz	
	Config 3		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz	
	Config 3		30 kHz	
PRACH configuration			FR1 PRACH configuration 2	
BWP	Initial DL BWP		DLBWP.0.1	

		Dedicated DL BWP		DLBWP.1.3
		Initial UL BWP		ULBWP.0.1
		Dedicated UL BWP		ULBWP.1.3
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc}^{Note2}			dBm/15kHz	NA Link only, see clause A.3.7A
N_{oc}^{Note2}	Config 1,2		dBm/SCS	
	Config 3			
$\hat{E}_s / I_{ot}$			dB	
$\hat{E}_s / N_{oc}$			dB	
I_o^{Note3}	Config 1,2		dBm/ 9.36MHz	
	Config 3		dBm/ 38.16MHz	
Propagation condition			-	AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Table A.7.3.1.4.2-4: Cell specific test parameters for Inter-band inter-frequency synchronous DAPS handover from FR1 to FR2 (Cell 2 in FR2)

Parameter		Unit	Cell 2	
			T1	T2 - T5
Assumption for UE beams ^{Note 6}			Rough	
AoA setup			Setup 1 as defined in A.3.15	
NR RF Channel Number			2	
Duplex mode	Config 1,2,3		TDD	
TDD configuration	Config 1,2,3		TDDConf.3.1	
BW _{channel}	Config 1,2,3	MHz	100: $N_{RB,c} = 66$	
BWP BW	Config 1,2,3	MHz	100: $N_{RB,c} = 66$	
TRS configuration	Config 1,2,3		TRS.2.1 TDD	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,2,3		SR3.1 TDD	
CORESET Reference Channel	Config 1,2,3		CR3.1 TDD	
OCNG Patterns			OCNG pattern 1	
CSI-RS configuration for CSI reporting	Config 1,2,3		CSI-RS.3.1 TDD	
SSB Configuration	Config 1,2,3		SSB.1 FR2	
SMTc Configuration			SMTc.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,3	kHz	120 kHz	

PUCCH/PUSCH subcarrier spacing	Config 1,2,3	kHz	120 kHz	
PRACH configuration			FR2 PRACH configuration 2	
TCI configuration			CSI-RS.Config.0	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc}^{Note2}		dBm/15kHz	-104.7	-104.7
N_{oc}^{Note2}		dBm/SCS	-95.7	-95.7
$\hat{E}_s/I_{ot}$		dB	-Infinity	10
$\hat{E}_s/N_{oc}$		dB	-Infinity	10
I_o^{Note3}		dBm/ 95.04MHz	-66.7	-55.4
Propagation condition		-	AWGN	
Note 1:	OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone			
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone.			
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.			

A.7.3.1.4.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 92 ms from the beginning of time period T3. During $D_{handover1}$, the interruption on Cell 1 shall not exceed $T_{interrupt1}$ as defined in Table 6.1.3.4.2-1 for synchronous DAPS HO.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay $D_{handover1}$ can be expressed as: $T_{RRC_procedure} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$, where:

$T_{RRC_procedure} = 10$ ms and is specified in clause 12 in TS 38.331 [2].

$T_{IU} = 20$ ms in the test. T_{IU} is defined in clause 6.1.1.2.2.

$T_{\Delta} = 20$ ms in the test. T_{Δ} is defined in clause 6.1.1.2.2.

$T_{processing} = 40$ ms in the test. $T_{processing}$ is defined in clause 6.1.1.2.2.

$T_{margin} = 2$ ms in the test. T_{margin} is defined in clause 6.1.1.2.2.

This gives a total of 92 ms.

The UE shall complete to release Cell 1 less than $(10 \text{ ms} + T_{\text{interrupt}2})$ from the beginning of time period T4. During $D_{\text{handover}2}$, the interruption on Cell 2 shall not exceed $T_{\text{interrupt}2}$ as defined in Table 6.1.3.4.2-2 for synchronous DAPS HO.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay $D_{\text{handover}2}$ can be expressed as: $T_{\text{RRC_procedure}} + T_{\text{interrupt}2}$, where:

$T_{\text{RRC_procedure}} = 10 \text{ ms}$ and is specified in clause 12 in TS 38.331 [2].

A.7.3.1.5 Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR2

A.7.3.1.5.1 Test Purpose and Environment

This test is to verify the requirement for the FR1-to-FR2 Inter-band inter-frequency asynchronous DAPS handover requirements specified in clause 6.1.3.4.

A.7.3.1.5.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.5.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.5.2-2, A.7.3.1.5.2-3 and A.7.3.1.5.2-4.

The test scenario comprises of two bands each with one cell. The test consists of five successive time periods, with time durations of T1, T2, T3, T4 and T5 respectively.

Before the start of T1, the UE is connected to Cell 1 (source PCell) on radio channel 1 but is not aware of Cell 2 (neighbour cell) on radio channel 2. The UE shall be configured with periodic CSI reporting for cell1. During T1, the UE shall not have any timing information of Cell 2.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event A4 is configured for neighbour cell (Cell 2), and the UE is configured with the measurement gaps (gap pattern ID # 0). Starting T2, Cell 2 becomes known to the UE. During T2, the UE shall report Event A4. After receiving the Event A4, the test system shall send a RRC message implying DAPS handover to the UE.

The start of T3 is the instant when the test system receives the ACK of the PDSCH corresponding to the last TTI containing the RRC message implying DAPS handover to Cell 2 (target PCell) sent to the UE. During T3, the UE shall be able to perform random access to Cell 2. DL schedule and UL feedback to cell 1 shall be avoided when UE is required to perform DL reception or UL transmission in PRACH procedure in cell 2, except preamble transmission. After the RACH procedure is completed, the test system shall send a RRC message to the UE to release Cell 1 (source cell) on radio channel 1.

The start of T4 is the instant when the the test system receives the ACK of the PDSCH corresponding to last TTI containing the RRC message implying source cell release sent to the UE. During T4, the UE shall perform source cell release.

Starting T5, the UE shall stop sending CSI report to the source cell.

Table A.7.3.1.5.2-1: Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR2 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Note: The UE is only required to be tested in one of the supported test configurations

Table A.7.3.1.5.2-2: General test parameters for Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR2

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
A4-Threshold	dBm	-120	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells	μs	62.5	Asynchronous cells
T1	s	5	
T2	s	<5	
T3	s	<0.5	
T4	ms	10+T _{interrupt2}	T _{interrupt2} as defined in Table 6.1.3.4.2-2 for asynchronous DAPS HO.
T5	ms	100	

Table A.7.3.1.5.2-3: Cell specific test parameters for Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR2 (Cell 1 in FR1)

Parameter		Unit	Cell 1	
			T1	T2 - T5
NR RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52	
	Config 2		10: N _{RB,c} = 52	
	Config 3		40: N _{RB,c} = 106	
BWP BW	Config 1	MHz	10: N _{RB,c} = 52	
	Config 2		10: N _{RB,c} = 52	
	Config 3		40: N _{RB,c} = 106	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
DRx Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
OCNG Patterns			OP.1	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	

reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity	Config 1,2	slot	5
	Config 3		10
CSI reporting offset	Config 1,2	slot	3
	Config 3		5
SSB Configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTc Configuration	Config 1,2		SMTc.1
	Config 3		SMTc.2
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz
	Config 3		30 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz
	Config 3		30 kHz
PRACH configuration			FR1 PRACH configuration 2
BWP	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.3
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.3
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc}^{Note2}		dBm/15kHz	NA Link only, see clause A.3.7A
N_{oc}^{Note2}	Config 1,2	dBm/SCS	
	Config 3		
$\hat{E}_s/I_{ot}$		dB	
$\hat{E}_s/N_{oc}$		dB	
I_o^{Note3}	Config 1,2	dBm/ 9.36MHz	
	Config 3	dBm/ 38.16MHz	
Propagation condition		-	AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.7.3.1.5.2-4: Cell specific test parameters for Inter-band inter-frequency asynchronous DAPS handover from FR1 to FR2 (Cell 2 in FR2)

Parameter	Unit	Cell 2	
		T1	T2 - T5
Assumption for UE beams ^{Note 6}		Rough	

AoA setup			Setup 1 as defined in A.3.15	
NR RF Channel Number			2	
Duplex mode	Config 1,2,3		TDD	
TDD configuration	Config 1,2,3		TDDConf.3.1	
BW _{channel}	Config 1,2,3	MHz	100: N _{RB,c} = 66	
BWP BW	Config 1,2,3	MHz	100: N _{RB,c} = 66	
TRS configuration	Config 1,2,3		TRS.2.1 TDD	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,2,3		SR.3.1 TDD	
CORESET Reference Channel	Config 1,2,3		CR.3.1 TDD	
OCNG Patterns			OP.1	
CSI-RS configuration for CSI reporting	Config 1,2,3		CSI-RS.3.1 TDD	
SSB Configuration	Config 1,2,3		SSB.1 FR2	
SMTc Configuration			SMTc.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,3	kHz	120 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,3	kHz	120 kHz	
PRACH configuration			FR2 PRACH configuration 2	
TCI configuration			CSI-RS.Config.0	
BWP	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.3	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.3	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc}^{Note2}		dBm/15kHz	-104.7	-104.7
N_{oc}^{Note2}		dBm/SCS	-95.7	-95.7
$\hat{E}_s / I_{ot}$		dB	-Infinity	10
$\hat{E}_s / N_{oc}$		dB	-Infinity	10
I_o^{Note3}		dBm/ 95.04MHz	-66.7	-55.4
Propagation condition		-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.				
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.				

A.7.3.1.5.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 92 ms from the beginning of time period T3. During $D_{\text{handover1}}$, the interruption on Cell 1 shall not exceed $T_{\text{interrupt1}}$ as defined in Table 6.1.3.4.2-1 for asynchronous DAPS HO.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay $D_{\text{handover1}}$ can be expressed as: $T_{\text{RRC_procedure}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}}$, where:

$T_{\text{RRC_procedure}} = 10$ ms and is specified in clause 12 in TS 38.331 [2].

$T_{\text{IU}} = 20$ ms in the test. T_{IU} is defined in clause 6.1.1.2.2.

$T_{\Delta} = 20$ ms in the test. T_{Δ} is defined in clause 6.1.1.2.2.

$T_{\text{processing}} = 40$ ms in the test. $T_{\text{processing}}$ is defined in clause 6.1.1.2.2.

$T_{\text{margin}} = 2$ ms in the test. T_{margin} is defined in clause 6.1.1.2.2.

This gives a total of 792 ms.

The UE shall complete to release Cell 1 less than $(10 \text{ ms} + T_{\text{interrupt2}})$ from the beginning of time period T4. During $D_{\text{handover2}}$, the interruption on Cell 2 shall not exceed $T_{\text{interrupt2}}$ as defined in Table 6.1.3.4.2-2 for asynchronous DAPS HO.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay $D_{\text{handover2}}$ can be expressed as: $T_{\text{RRC_procedure}} + T_{\text{interrupt2}}$, where:

$T_{\text{RRC_procedure}} = 10$ ms and is specified in clause 12 in TS 38.331 [2].

A.7.3.1.6 Handover with PSCell from SA to EN-DC with; unknown FR2 target PSCell

A.7.3.1.6.1 Test Purpose and Environment

This test is to verify the PSCell addition delay requirements specified in clause 6.1.5.2 for handover with PSCell from NR SA to EN-DC with sequential processing when the SMTC of target unknown PSCell is present in RRCConnectionReconfiguration and the target PSCell is in FR2.

A.7.3.1.6.2 Test Parameters

The test scenario comprises of three carriers and one cell on each carrier. Cell 1 is the NR PCell, Cell 2 is an inter-RAT E-UTRAN neighbour cell and Cell 3 is an NR neighbour cell, on radio channel 1 in FR1, radio channel 2 in E-UTRAN in FR1 and radio channel 3 in FR2, respectively.

The test consists of three successive time periods, with time durations of T1, T2, T3 and T4 respectively. No gap patterns are configured in the test case.

At the start of time duration T1, the UE does not have any timing information of cell 2 and cell 3, and the UE is only monitoring Cell 1. During T1, only Cell1 is known to the UE.

Starting T2, cell 2 and cell 3 become detectable. The RRC message implying handover with PSCell shall be sent to the UE during period T2 after the UE has reported Event B2 and Event B1. The start of T2 is the instant when the last TTI containing the RRC message implying handover with PSCell is sent to the UE. The handover with PSCell message shall contain Cell 2 as the target cell and Cell 3 as PSCell-to-be added. The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added.

The point in time at which the RRC message implying HO (Cell 2) with PSCell (Cell 3) is received at the UE antenna connector defines the start of period T3.

During T3, the UE shall carry out random access (i.e., transmit the PRACH) towards the Cell 2 and Cell 3. The test system shall observe the UE sends PRACH to E-UTRAN Cell 2 and PSCell (Cell 3) during period T3. Reception by the test system of the PRACH preambles defines the end of T3.

During T4, the UE shall send periodic CSI reports in PSCell and the test system shall observe the periodic reporting of CSI for PSCell.

Supported test configurations are shown in table A.7.3.1.6.2-1. General test parameters are provided in Table A.6.3.1.14.1-2. Cell specific test parameters for NR Cell 1, E-UTRAN PCell Cell 2 and NR PSCell Cell 3 are provided in Tables A.6.3.1.14.1-3, A.6.3.1.14.1-4 and A.6.3.1.14.1-5 respectively.

Table A.7.3.1.6.2-1: Handover with PSCell from NR SA to EN-DC test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target PCell: LTE FDD Target PSCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target PCell: LTE TDD Target PSCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target PCell: LTE FDD Target PSCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target PCell: LTE TDD Target PSCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.6.2-2: General test parameters for handover with PSCell from NR SA to EN-DC

Parameter		Unit	Value	Comment
RF Channel Number			1, 2, 3	Three radio channels are used for this test. One for FR1 source PCell, second for E-UTRA target PCell and third for target NR PSCell
Initial Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2, Cell3	Neighbour cell on RF channel number 2 and 3.
Final Condition	Active PCell		Cell2	E-UTRA PCell on RF channel number 2.
	Active PSCell		Cell3	PSCell on RF channel number 3.
	Neighbour Cell		Cell1	RF channel number 1
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
Event B2	Threshold1	dBm	As specified in Table A.6.3.1.4-3	Absolute NR SS-RSRP threshold for event B2
	Threshold2EUTRAN	dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
	Hysteresis	dB	0	
	TimeToTrigger	s	0	
Event B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-93	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	S	0	
Filter coefficient			0	L3 filtering is not used

DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure
Time offset between cell 1 and 2		3 ms	Asynchronous cells
Gap pattern configuration Id		0	As specified in Table 9.1.2-1 started before T2 starts
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on carrier frequency of cell3.
T1	s	5	
T2	s	≤5	During this time the cell 2 and cell 3 shall be known.
T3	s	1	During this time the UE perform HO with PSCell addition.
T4	s	0.5	During this time the UE sends CSI reports for PSCell (Cell 3).

Table A.7.3.1.6.2-3: Cell specific test parameters for NR Cell 1

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2, 3, 4	1		
Duplex mode			1, 2	FDD		
			3, 4	TDD		
BW _{channel}		MHz	1, 2, 3	10: N _{RB,c} = 52		
			4	40: N _{RB,c} = 106		
PDSCH reference measurement channel			1, 2	SR.1.1 FDD		
			3	SR.1.1 TDD		
			4	SR.2.1 TDD		
CORSET reference channel			1, 2	CR.1.1 FDD		
			3	CR.1.1 TDD		
			4	CR.2.1 TDD		
TRS configuration			1, 2	TRS.1.1 FDD		
			3	TRS.1.1 TDD		
			4	TRS.1.2 TDD		
OCNG pattern ^{Note1}			1, 2, 3, 4	OP.1		
BWP	Initial DL BWP		1, 2, 3, 4	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3, 4	SMTC.1		
SSB configuration			1, 2, 3	SSB.1 FR1		
			4	SSB.2 FR1		
b2-Threshold1		dBm	1, 2, 3	-96		
			4	-93		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						

EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}^{Note2}	dBm/15 KHz	1, 2, 3, 4	-100	-104	-100
N_{oc}^{Note2}	dBm/SCS	1, 2, 3	-100	-104	-100
		4	-97	-101	-97
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4	12	0	-4
$\hat{E}_s/I_{ot}^{Note3}$	dB	1, 2, 3, 4	12	0	-4
SS-RSRP ^{Note3}	dBm/SCS	1, 2, 3	-88	-104	-104
		4	-85	-101	-101
I_o^{Note3}	dBm/9.36 MHz	1, 2, 3	-59.78	-73.04	-70.59
		4	-53.68	-66.9448	-64.49
Propagation condition		1, 2, 3, 4	AWGN		
Antenna Configuration and Correlation Matrix		1, 2, 3, 4	1x2 Low		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Table A.7.3.1.6.2-4: Cell specific test parameters for E-UTRA Cell 2

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4	2		
Duplex mode		1, 3	FDD		
		2, 4	TDD		
TDD special subframe configuration ^{Note1}		2, 4	6		
TDD uplink-downlink configuration ^{Note1}		2, 4	1		
BW _{channel}	MHz	1, 2, 3, 4	10 MHz: $N_{RB,c} = 50$		
PRACH Configuration ^{Note2}		1, 2	4		
		3, 4	53		
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2	10 MHz: R.3 FDD		
		3, 4	10 MHz: R.0 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3, 4	10 MHz: R.6 FDD		
OCNG Patterns ^{Note3}		1, 2	10 MHz: OP.10 FDD		
		3, 4	10 MHz: OP.1 TDD		
PBCH_RA	dB	1, 2, 3, 4	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					

PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note4}					
OCNG_RB ^{Note4}					
N _{oc} ^{Note5}	dBm/15kHz	1, 2, 3, 4	-98		
Ê _s /N _{oc}	dB	1, 2, 3, 4	-Infinity	8	78
Ê _s /I _{ot} ^{Note6}	dB	1, 2, 3, 4	-Infinity	78	78
RSRP ^{Note6}	dBm/15kHz	1, 2, 3, 4	-Infinity	-90	-90
SCH_RP ^{Note6}	dBm/15kHz	1, 2, 3, 4	-Infinity	-90	-90
I _o ^{Note6}	dBm/9MHz	1, 2, 3, 4	-67.21 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)
Propagation Condition		1, 2, 3, 4	AWGN		
Antenna Configuration and Correlation Matrix ^{Note7}		1, 2, 3, 4	1x2 Low		
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2:	PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].				
Note 3:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 4:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 5:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 6:	Ê _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 7:	Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

Table A.7.3.1.6.2-5: Cell specific test parameters for NR Cell 3

Parameter	Unit	Config	Test			
			T1	T2	T3	T4
E-UTRA Channel Number		1, 2, 3, 4	1			
NR Channel Number		1, 2, 3, 4	2			
Duplex Mode		1, 2, 3, 4	TDD			
TDD configuration		1, 2, 3, 4	TDDConf.3.1			
$BW_{channel}$	MHz	1, 2, 3, 4	100: $N_{RB,c} = 66$			
Data RBs allocated		1, 2, 3, 4	48			
Initial BWP Configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1			
Dedicated BWP Configuration		1, 2, 3, 4	DLBWP.1.1 ULBWP.1.1			
PRACH configuration on cell 3		FR2 PRACH configuration 2	Captured in A.3.8.3.2			
TRS Configuration		1, 2, 3, 4	TRS.2.1 TDD			
PDSCH/PDCCH TCI state		1, 2, 3, 4	TCI.State.2			
PDSCH Reference measurement channel		1, 2, 3, 4	SR.3.3 TDD			
RMSI CORESET Reference Channel		1, 2, 3, 4	CR.3.2 TDD			
Dedicated CORESET Reference Channel		1, 2, 3, 4	CCR.3.7 TDD			
OCNG Patterns		1, 2, 3, 4	OP.3			
SSB configuration		1, 2, 3, 4	SSB.2 FR2			
SMTc configuration		1, 2, 3, 4	SMTc.2			
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 3, 4	120			
TRS Configuration		1, 2, 3, 4	TRS.2.1 TDD			
CSI-RS configuration for CSI reporting		1, 2, 3, 4	CSI-RS.3.1 TDD			
reportConfigType		1, 2, 3, 4	periodic			

reportQuantity		1, 2, 3, 4	cri-RI-PMI-CQI
CSI reporting periodicity	slot	1, 2, 3, 4	40
CSI reporting offset	slot	1, 2, 3, 4	4
EPRE ratio of PSS to SSS	dB	1, 2, 3, 4	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation condition		1, 2, 3, 4	No external noise (Note 1)
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].			

Table A.7.3.1.6.2-6: OTA related test parameters

Parameter	Unit	Cell 3			
		T1	T2	T3	T4
Angle of arrival configuration		Setup 2a according to clause A.3.15.2.1			
Assumption for UE beams ^{Note 6}		Rough			
$\hat{E}_s$	dBm/SCS	-Infinity		-81	
SSB _{RP} ^{Note 2, Note 4}	dBm/SCS	-Infinity		-81	
$\hat{E}_s / I_{ot_BB}$ ^{Note 2, Note 7}	dB	-Infinity		4.88	
I_o ^{Note 2, Note 4}	dBm/95.04 MHz	N/A		-56.41	
Note 1: Void Note 2: E_s/I_{ot} , SSB _{RP} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: Void Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 7: Calculation of E_s/I_{ot_BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.					

A.7.3.1.6.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 175 ms^{Note1} from the beginning of time period T3.

The UE shall start to transmit the PRACH to Cell 3 less than 692 ms^{Note2} from the beginning of time period T3.

The rate of correct PSCell addition observed during repeated tests shall be at least 90%.

NOTE1: The handover delay can be expressed as specified in clause 6.1.5.2:

$D_{HOwithPSCell_PCell} = \text{RRC procedure delay} + T_{interrupt}$, where

RRC procedure delay = 50 ms.

$T_{interrupt} = 125$ ms.

NOTE2: The PSCell addition delay can be expressed as follows as specified in clause 6.1.5.2.2:

$$D_{\text{HOwithPSCell_PSCell}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search_HO}} + T_{\text{search_PSCell}} + T_{\Delta} + T_{\text{PSCell_DU}} + 2 \text{ ms, where:}$$

RRC procedure delay = 50 ms and is specified in clause 12 in TS 38.331 [2].

$T_{\text{processing}}$ is as defined as 50ms in the test.

$T_{\text{search_HO}}$ is as defined as 80ms in the test.

$T_{\text{search_PSCell}}$ is as defined as 480ms in the test.

T_{Δ} is defined as 20ms in the test.

$T_{\text{PSCell_DU}}$ is defined as 10ms in the test.

This gives a total of 692 ms.

A.7.3.1.7 HO with PSCell from FR1 NR-SA to EN-DC with known E-UTRA PCell and known FR2 PSCell

A.7.3.1.7.1 Test purpose and environment

The purpose of this test is to verify that the delay of HO with PSCell from FR1 NR-SA to EN-DC with known E-UTRA PCell and known FR2 PSCell are within the requirements stated in clause 6.1.5.2.2 of TS 36.133 [15] for the case when the E-UTRA PCell and FR2 PSCell are known by the UE at the time of handover with PSCell.

The test consists of three successive time periods with duration of T1, T2, and T3. There are three carriers each with one cell. Before the test starts the UE is connected to Cell 1 (source FR1 PCell) on radio channel 1 (FR1 PCC) and is aware of Cell 2 (target E-UTRA PCell) on radio channel 2 and Cell 3 (FR2 target PSCell) on radio channel 3. The UE is monitoring both cell 2 and cell 3 before receives a RRC message implying handover with PSCell.

At the start of time duration T1, the UE does not have any timing information of Cell 2 and Cell 3. Starting T2, Cell 2 and Cell 3 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 begins to enable inter-RAT frequency monitoring. The test system shall send a RRC message to the UE to trigger HO (Cell 2) with PSCell (Cell 3) during period T2, after UE has reported Event B2 and Event B1. The handover with PSCell message shall contain Cell 2 as the target cell and Cell 3 as PSCell-to-be added. The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added.

The point in time at which the RRC message implying HO (Cell 2) with PSCell (Cell 3) is received at the UE antenna connector defines the start of period T3. During T3, the UE shall carry out random access (i.e., transmit the PRACH) towards the Cell 2 and Cell 3. The test system shall observe the UE sends PRACH to Cell 2 and Cell 3 during period T3. Reception by the test system of the PRACH preambles defines the end of T3.

The test system shall observe the UE sends PRACH to E-UTRAN Cell 2 and PSCell (Cell 3) during period T3.

During T4, the UE shall send periodic CSI reports in PSCell and the test system shall observe the periodic reporting of CSI for PSCell.

Supported test configurations are shown in A.7.3.1.7.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.2-1. The E-UTRA cell once set up is not changed across time. The test parameters for NR cell are given in Tables A.7.3.1.7.1-2, cell-specific parameters in A.7.3.1.7.1-3, A.7.3.1.7.1-4, A.7.3.1.7.1-5 and OTA parameters in A.7.3.1.7.1-6 below.

Table A.7.3.1.7.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
---------------	-------------

1	Source FR1 PCell: NR FDD, SSB SCS 15kHz, data SCS 15 kHz, 10 MHz bandwidth Target PCell: LTE FDD, Target PSCell: NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	Source FR1 PCell: NR FDD, SSB SCS 15kHz, data SCS 15 kHz, 10 MHz bandwidth Target PCell: LTE TDD, Target PSCell: NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.7.1-2: General Test Parameters for HO with PSCell

Parameter		Unit	Value	Comment
RF Channel Number			1, 2, 3	Three radio channels are used for this test. One for FR1 source PCell, second for E-UTRA target PCell and third for target NR PSCell
Initial Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2, Cell3	Neighbour cell on RF channel number 2 and 3.
Final Condition	Active PCell		Cell2	E-UTRA PCell on RF channel number 2.
	Active PSCell		Cell3	PSCell on RF channel number 3.
	Neighbour Cell		Cell1	RF channel number 1
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
Event B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	b1-Threshold RSRP	dBm	-93	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	S	0	
Event B2	b2-Threshold1	dBm	As specified in Table A.6.3.1.4-3	Absolute NR SS-RSRP threshold for event B2
	b2-Threshold2EUTRAN	dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
	Hysteresis	dB	0	
	TimeToTrigger	s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
PRACH configuration on cell3			FR2 configuration 2	Captured in A.3.8.3.2
Time offset between cell 1 and 2			3 ms	Asynchronous cells
Gap pattern configuration Id			0	As specified in Table 9.1.2-1 started before T2 starts
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 3		dB	0	Individual offset for cells on carrier frequency of cell3.
T1		s	5	
T2		s	≤5	During this time the cell 2 and cell 3 shall be known.
T3		s	1	During this time the UE perform HO with PSCell addition.
T4		s	0.5	During this time the UE sends CSI reports for PSCell (Cell 3).

Table A.7.3.1.7.1-3: Cell specific test parameters for Cell 1

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2	1		
Duplex mode			1, 2	FDD		
BW _{channel}		MHz	1, 2	10: N _{RB,c} = 52 (FDD)		
PDSCH reference measurement channel			1, 2	SR.1.1 FDD		
CORSET reference channel			1, 2	CR.1.1 FDD		
TRS configuration			1, 2	TRS.1.1 FDD		
OCNG pattern ^{Note1}			1, 2	OP.1		
BWP	Initial DL BWP		1, 2	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTc configuration			1, 2	SMTc.1		
SSB configuration			1, 2	SSB.1 FR1		
b2-Threshold1		dBm	1, 2	-96		
EPRE ratio of PSS to SSS		dB	1, 2	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N _{oc} ^{Note2}		dBm/15 KHz	1, 2	-100	-104	-100
N _{oc} ^{Note2}		dBm/SCS	1, 2	-100	-104	-100
Ê _s /N _{oc}		dB	1, 2	12	0	-4
Ê _s /I _{ot} ^{Note3}		dB	1, 2	12	0	-4
SS-RSRP ^{Note3}		dBm/SCS	1, 2	-88	-104	-104
I _o ^{Note3}		dBm/9.36 MHz	1, 2	-59.78	-73.04	-70.59
Propagation condition			1, 2	AWGN		
Antenna Configuration and Correlation Matrix			1, 2	1x2 Low		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.						
Note 3: Ê _s /I _{ot} , SS-RSRP, and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

Table A.7.3.1.7.1-4: Cell specific test parameters for Cell 2

Parameter	Unit	Configuration	Cell 2
-----------	------	---------------	--------

			T1	T2	T3
RF channel number		1, 2	2		
Duplex mode		1, 2	FDD		
TDD special subframe configuration ^{Note1}		4, 5, 6	6		
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1		
BW _{channel}	MHz	1, 2	10 MHz: N _{RB,c} = 50		
PRACH Configuration ^{Note2}		1, 2	4		
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2	10 MHz: R.3 FDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2	10 MHz: R.6 FDD		
OCNG Patterns ^{Note3}		1, 2	10 MHz: OP.10 FDD		
PBCH_RA	dB	1, 2	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note4}					
OCNG_RB ^{Note4}					
N _{oc} ^{Note5}	dBm/15kHz	1, 2	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	8	78
$\hat{E}_s/I_{ot}$ ^{Note6}	dB	1, 2	-Infinity	78	78
RSRP ^{Note6}	dBm/15kHz	1, 2	-Infinity	-90	-90
SCH_RP ^{Note6}	dBm/15kHz	1, 2	-Infinity	-90	-90
I _o ^{Note6}	dBm/9MHz	1, 2	-67.21 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)
Propagation Condition		1, 2	AWGN		
Antenna Configuration and Correlation Matrix ^{Note7}		1, 2	1x2 Low		
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2:	PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].				
Note 3:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 4:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 5:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 6:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 7:	Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

Table A.7.3.1.7.1-5: Cell specific test parameters for Cell 3

Parameter	Unit	Config	Test
-----------	------	--------	------

			T1	T2	T3	T4
E-UTRA Channel Number		1,2	1			
NR Channel Number		1,2	2			
Duplex Mode		1,2	TDD			
TDD configuration		1,2	TDDConf.3.1			
BW _{channel}	MHz	1,2	100: NRB,c = 66			
Data RBs allocated		1,2	48			
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1			
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1			
TRS Configuration		1,2	TRS.2.1 TDD			
PDSCH/PDCCH TCI state		1,2	TCI.State.2			
PDSCH Reference measurement channel		1,2	SR.3.3 TDD			
RMSI CORESET Reference Channel		1,2	CR.3.2 TDD			
Dedicated CORESET Reference Channel		1,2	CCR.3.7 TDD			
OCNG Patterns		1,2	OP.3			
SSB configuration		1,2	SSB.2 FR2			
SMTC configuration		1,2	SMTC.2			
PDSCH/PDCCH subcarrier spacing	kHz	1,2	120			
TRS Configuration		1,2	TRS.2.1 TDD			
CSI-RS configuration for CSI reporting		1,2	CSI-RS.3.1 TDD			
reportConfigType		1,2	periodic			
reportQuantity		1,2	cri-RI-PMI-CQI			
CSI reporting periodicity	slot	1,2	40			
CSI reporting offset	slot	1,2	4			
EPRE ratio of PSS to SSS	dB	1,2	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
Propagation condition		1,2	No external noise (Note 1)			
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].						

Table A.7.3.1.7.1-6: OTA related test parameters

Parameter	Unit	Cell 3			
		T1	T2	T3	T4
Angle of arrival configuration		Setup 2a according to clause A.3.15.2.1			
Assumption for UE beams ^{Note 6}		Rough			
$\hat{E}_s$	dBm/SCS	-Infinity	-81		
SSB RP ^{Note 2, Note 4}	dBm/SCS	-Infinity	-81		
$\hat{E}_s / I_{\text{ot BB}}$ ^{Note 2, Note 7}	dB	-Infinity	4.88		
I_o ^{Note 2, Note 4}	dBm/95.04 MHz	N/A	-56.41		

Note 1:	Void
Note 2:	Es/lot, SSB_RP and lo levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	Void
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 7:	Calculation of Es/lot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.3.1.7.2 Test Requirements

In this test, the UE shall start to transmit the PRACH to E-UTRA Cell 2 less than 105 ms^{Note1} from the beginning of time period T3.

The UE shall transmit the PRACH to PSCell at latest 137 ms^{Note2} from the beginning of time period T3.

The rate of correct observed PSCell addition delay in HO with PSCell during repeated tests shall be at least 90%.

NOTE1: The handover delay can be expressed as specified in clause 6.1.5.2:

$$D_{\text{HOwithPSCell_PCell}} = \text{RRC procedure delay} + T_{\text{interrupt}},$$

Where RRC procedure delay = 50 ms, $T_{\text{interrupt}} = T_{\text{search_HO}} + T_{\text{IU}} + T_{\text{processing}}$ is defined in clause 6.1.5.2.1, where

$$T_{\text{search}} = 0 \text{ ms},$$

$$T_{\text{IU}} = 10 \text{ ms},$$

$$T_{\text{processing}} = 45 \text{ ms}.$$

Note2: The PSCell addition delay can be expressed as follows as specified in clause 6.1.5.2:

$$D_{\text{HOwithPSCell_PSCell}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search_HO}} + T_{\text{search_PSCell}} + T_{\Delta} + T_{\text{PSCell_DU}} + 2 \text{ ms}$$

Where:

$$T_{\text{RRC_delay}} = 50 \text{ ms}$$

$$T_{\text{processing}} = 45 \text{ ms}$$

$$T_{\text{search_HO}} = 0 \text{ ms}$$

$$T_{\text{search_PSCell}} = 0 \text{ ms}$$

$$T_{\Delta} = 20 \text{ ms}$$

$$T_{\text{PSCell_DU}} = 1 \cdot 10 + 10 = 20 \text{ ms}$$

A.7.3.1.8 NR PSCell change delay in HO with PSCell from NR-DC to NR-DC

A.7.3.1.8.1 Test Purpose and Environment

The purpose of this test is to verify the PSCell change delay requirements in HO with PSCell from NR-DC to NR-DC defined in clauses 6.1.5.4.2. The requirements are applicable to NR FR1-FR1 inter-frequency PCell handover and NR FR2-FR2 intra-frequency PSCell change.

The supported test configurations are given in Table A.7.3.1.8.1-1. The test scenario comprises four NR cells, source PCell(Cell 1) and source PSCell(Cell 2), target PCell(Cell 3), target PSCell(Cell 4).

Cell 1 and Cell 3 are on radio channel 1 in FR1. Cell 2 and Cell 4 are on radio channel 2 in FR2. Test parameters are given in Tables A.7.3.1.8.1-2, A.7.3.1.8.1-3, A.7.3.1.8.1-4 and A.7.3.1.8.1-5 below. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of T1, the UE shall be connected to Cell 1 on radio channel 1 and Cell 2 on radio channel 2. UE is not aware of Cell 3 and Cell 4. Starting T2, cell 3 and Cell 4 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.8.1-1: Supported test configurations for HO with PSCell from NR-DC to NR-DC

Config	Description
1	Source PCell: FR1 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target PCell: FR1 NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Source PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	Source PCell: FR1 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target PCell: FR1 NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Source PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	Source PCell: FR1 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target PCell: FR1 NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Source PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target PSCell: FR2 NR 120kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.8.1-2: General test parameters for PCell FR1-FR1 Inter frequency handover

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 3	
Final condition	Active cell	Cell 3	
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
T1	s	5	
T2	s	≤5	

Table A.7.3.1.8.1-3: Cell specific test parameters for PCell FR1-FR1 Inter frequency handover

Parameter		Unit	Cell 1		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
BWP BW	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		40: N _{RB,c} = 106			
TRS configuration	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRx Cycle		ms	Not Applicable			

PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
SSB Configuration	Config 1,2		SSB.1 FR1			
	Config 3		SSB.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}		dBm/15kHz	-98		-98	
N_{oc}^{Note2}	Config 1,2	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s/I_{ot}$		dB	4	4	-Infinity	5
$\hat{E}_s/N_{oc}$		dB	4	4	-Infinity	5
SSB_RP	Config 1,2	dBm/SCS	-94	-94	-Infinity	-93
	Config 3	dBm/SCS	-91	-91	-Infinity	-90
I_o^{Note3}	Config 1,2	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-63.85
	Config 3	dBm/ 38.16MHz	-58.49	-58.49	-63.94	-57.75
Propagation condition		-	AWGN		AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Table A.7.3.1.8.1-4: General test parameters Intra-frequency FR2-FR2 PSCell change

Parameter	Unit	Value	Comment
-----------	------	-------	---------

Initial conditions	Active cell		Cell 2	
	Neighbouring cell		Cell 4	
Final condition	Active cell		Cell 4	
A4-Offset		dBm	-120	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μ s	Synchronous cells
T1		s	5	
T2		s	≤ 10	

Table A.7.3.1.8.1-5: Cell specific test parameters for Intra-frequency FR2-FR2 PSCell change

Parameter		Unit	Cell 2		Cell 4	
			T1	T2	T1	T2
Assumption for UE beams ^{Note 6}			Rough		Rough	
AoA setup			Setup 1 as defined in A.3.15			
NR RF Channel Number			1		1	
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
BW _{channel}		MHz	100: N _{RB,c} = 66			
BWP BW		MHz	100: N _{RB,c} = 66			
Data RBs allocated			66			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR3.1 TDD			
RMSI CORESET Reference Channel			CR3.1 TDD			
Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			O P. 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration			SSB. 3 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuraiton	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}		dBm/15kHz	-104.7			
N_{oc} ^{Note2}		dBm/SCS	-95.7			
$\hat{E}_s / I_{ot}$		dB	6	-1.8	-Infinity	0
$\hat{E}_s / N_{oc}$		dB	6	6	-Infinity	7
I_o ^{Note3}		dBm/	-59.7	-56.7	-59.7	-56.7

		BW			
Propagation condition		-	AWGN	AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone				
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.3.1.8.2 Test Requirements

The UE shall start to transmit the PRACH to target PSCell (Cell 4) less than 83 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

A.7.3.1.9 Intra-frequency handover from FR2-2 to FR2-2; unknown target cell

A.7.3.1.9.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-2-NR FR2-2 intra frequency handover requirements specified in clause 6.1.1.4.

A.7.3.1.9.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.9.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.9.2-2, and A.7.3.1.9.2-3.

The test scenario comprises of carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.9.2-1: Intra-frequency handover from FR2-2 to FR2-2 test configurations

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.9.2-2: General test parameters Intra-frequency handover from FR2-2 to FR2-2

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
A4-Offset	dBm	-120	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used

Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 10	

Table A.7.3.1.9.2-3: Cell specific test parameters for NR FR2-2-FR2-2 Intra frequency handover test case

Parameter		Unit	Config	Cell 1		Cell 2	
				T1	T2	T1	T2
Assumption for UE beams ^{Note 6}			1,2,3	Rough		Rough	
AoA setup			1,2,3	Setup 1 as defined in A.3.15			
NR RF Channel Number			1,2,3	1		1	
Duplex mode			1,2,3	TDD			
TDD configuration			1	TBD			
			2	TBD			
			3	TBD			
BW _{channel}		MHz	1	100: N _{RB,c} = 66			
			2	400: N _{RB,c} = 66			
			3	400: N _{RB,c} = 33			
Data RBs allocated			1	66			
			2	66			
			3	33			
DRx Cycle		ms	1,2,3	Not Applicable			
PDSCH Reference measurement channel			1	SR3.1 TDD			
			2	TBD			
			3	TBD			
RMSI CORESET Reference Channel			1	CR3.1 TDD			
			2	TBD			
			3	TBD			
Control Channel RMC			1	CCR.3.1 TDD			
			2	TBD			
			3	TBD			
OCNG Patterns			1,2,3	O P. 1			
SMTC Configuration			1,2,3	SMTC pattern 1			
SSB Configuration			1	SSB. 3 FR2			
			2	TBD			
			3	TBD			
PDSCH/PDCCH subcarrier spacing		kHz	1	120			
			2	480			
			3	960			
PUCCH/PUSCH subcarrier spacing		kHz	1	120			
			2	480			
			3	960			
PRACH configuration			1,2,3	FR2 PRACH configuration 1			
TRS configuration			1	TRS.2.1 TDD			
			2	TBD			
			3	TBD			
PDSCH/PDCCH TCI state			1,2,3	TCI.State.2			
BWP configuraiton	Initial DL BWP		1,2,3	DLBWP.0.1			
	Dedicated DL BWP		1,2,3	DLBWP.1.1			
	Initial UL BWP		1,2,3	ULBWP.0.1			
	Dedicated UL BWP		1,2,3	ULBWP.1.1			
EPRE ratio of PSS to SSS		dB		0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							

EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15k Hz		-104.7			
N_{oc}^{Note2}	dBm/SC S	1	-95.7			
		2	-89.7			
		3	-86.7			
$\hat{E}_s / I_{ot}$	dB		6	-1.8	-Infinity	0
$\hat{E}_s / N_{oc}$	dB		6	6	-Infinity	7
I_o^{Note3}	dBm/95.0 4 MHz Note4		-59.7	-56.7	-59.7	-56.7
	dBm/380. 16 MHz Note4		-53.7	-50.7	-53.7	-50.7
Propagation condition	-		AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.3.1.9.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 772 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 762 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.4.2.

This gives a total of 772 ms.

A.7.3.1.10 Inter-frequency handover from FR2-2 to FR2-2; unknown target cell

A.7.3.1.10.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-2-NR FR2-2 Inter frequency handover requirements specified in clause 6.1.1.4.

A.7.3.1.10.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.10.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.10.2-2, and A.7.3.1.10.2-3.

The test scenario comprises of carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.10.2-1: Inter-frequency handover from FR2-2 to FR2-2 test configurations

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.10.2-2: General test parameters Inter-frequency handover from FR2-2 to FR2-2

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
A4-Offset	dBm	-120	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 10	

Table A.7.3.1.10.2-3: Cell specific test parameters for NR FR2-2-FR2-2 Inter frequency handover test case

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams ^{Note 6}		1,2,3	Rough		Rough	
AoA setup		1,2,3	Setup 1 as defined in A.3.15			
NR RF Channel Number		1,2,3	1		2	
Duplex mode		1,2,3	TDD			
TDD configuration		1	TBD			
		2	TBD			
		3	TBD			
BW _{channel}	MHz	1	100: N _{RB,c} = 66			
		2	400: N _{RB,c} = 66			
		3	400: N _{RB,c} = 33			
Data RBs allocated		1	66			
		2	66			
		3	33			
DRx Cycle	ms	1,2,3	Not Applicable			
PDSCH Reference measurement channel		1	SR3.1 TDD			
		2	TBD			
		3	TBD			

RMSI CORESET Reference Channel			1	CR3.1 TDD				
			2	TBD				
			3	TBD				
Control Channel RMC			1	CCR.3.1 TDD				
			2	TBD				
			3	TBD				
OCNG Patterns			1,2,3	O P. 1				
SMTc Configuration			1,2,3	SMTc pattern 1				
SSB Configuration			1	SSB. 3 FR2				
			2	TBD				
			3	TBD				
PDSCH/PDCCH subcarrier spacing	kHz		1	120				
			2	480				
			3	960				
PUCCH/PUSCH subcarrier spacing	kHz		1	120				
			2	480				
			3	960				
PRACH configuration			1,2,3	FR2 PRACH configuration 1				
TRS configuration			1	TRS.2.1 TDD				
			2	TBD				
			3	TBD				
PDSCH/PDCCH TCI state			1,2,3	TCI.State.2				
BWP configuraiton	Initial DL BWP		1,2,3	DLBWP.0.1				
	Dedicated DL BWP		1,2,3	DLBWP.1.1				
	Initial UL BWP		1,2,3	ULBWP.0.1				
	Dedicated UL BWP		1,2,3	ULBWP.1.1				
EPRE ratio of PSS to SSS		dB			0		0	
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc}^{Note2}		dBm/15k Hz		-104.7				
N_{oc}^{Note2}		dBm/SC S	1	-95.7				
			2	-89.7				
			3	-86.7				
$\hat{E}_s/I_{ot}$		dB		6	6	-Infinity	7	
$\hat{E}_s/N_{oc}$		dB		6	6	-Infinity	7	
10^{Note3}		dBm/95.0 4 MHz Note4		-59.7	-59.7	-58.9	-58.9	
		dBm/380. 16 MHz Note4		-53.7	-53.7	-52.9	-52.9	
Propagation condition		-		AWGN			AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.1.10.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 772 ms from the beginning of time period T2. The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{\text{interrupt}}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{\text{interrupt}}$ = 762 ms in the test. $T_{\text{interrupt}}$ is defined in clause 6.1.1.4.2.

This gives a total of 772 ms.

A.7.3.1.11 Inter-frequency handover from FR1 to FR2-2; unknown target cell

A.7.3.1.11.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR2-2 Inter frequency handover requirements specified in clause 6.1.1.4.

A.7.3.1.11.2 Test Parameters

Supported test configurations are shown in table A.7.3.1.11.2-1 and A.7.3.1.11.2-1A, and the configuration for NR Cell1 and NR Cell2 are chosen independently. Both handover delay and interruption length are tested by using the parameters in table A.7.3.1.11.2-2, and A.7.3.1.11.2-3.

The test scenario comprises of carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.7.3.1.11.2-1: Inter-frequency handover from FR1 to FR2-2 test configurations for Cell1

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.1.11.2-1A: Inter-frequency handover from FR1 to FR2-2 test configurations for Cell2

Configuration	Description
1	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, ≥10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, ≥40 MHz bandwidth, TDD duplex mode

Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	The UE is only required to be tested in one with smallest aggregated channel bandwidth from supported band combinations which is composed of CCs $\geq$ the bandwidth (BW_{channel}) defined in each test configuration

Table A.7.3.1.11.2-2: General test parameters Inter-frequency handover from FR1 to FR2-2

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
A4-Offset	dBm	-120	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 10	

Table A.7.3.1.11.2-3: Cell specific test parameters for NR FR1-FR2-2 Inter frequency handover test case

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams ^{Note 6}		1,2,3	-		Rough	
AoA setup		1,2,3	-		Setup 1 as defined in A.3.15	
NR RF Channel Number		1,2,3	1		2	
Duplex mode		1	FDD		TDD	
		2,3	TDD		TDD	
TDD configuration		1	-		TBD	
		2	TDDConf.1.1		TBD	
		3	TDDConf.2.1		TBD	
BW_{channel}	MHz	1	10: $N_{RB,C} = 52$		100: $N_{RB,C} = 66$	
		2	10: $N_{RB,C} = 52$		400: $N_{RB,C} = 66$	
		3	40: $N_{RB,C} = 106$		400: $N_{RB,C} = 33$	
Data RBs allocated		1	52		66	
		2	52		66	
		3	106		33	
DRx Cycle	ms	1,2,3	Not Applicable		Not Applicable	
PDSCH Reference measurement channel		1	SR.1.1 FDD		SR3.1 TDD	
		2	SR.1.1 TDD		TBD	
		3	SR2.1 TDD		TBD	
RMSI CORESET Reference Channel		1	CR.1.1 FDD		CR3.1 TDD	
		2	CR.1.1 TDD		TBD	
		3	CR2.1 TDD		TBD	
Control Channel RMC		1	CCR.1.1 FDD		CCR.3.1 TDD	
		2	CCR.1.1 TDD		TBD	
		3	CCR.2.1 TDD		TBD	
OCNG Patterns		1,2,3	O P. 1		O P. 1	
SMTC Configuration		1	SMTC.1		SMTC pattern 1	
		2,3	SMTC.2		SMTC pattern 1	
SSB Configuration		1	SSB.1 FR1		SSB. 3 FR2	
		2	SSB.2 FR1		TBD	
		3	SSB.2 FR1		TBD	
PDSCH/PDCCH subcarrier spacing	kHz	1	15		120	

			2	30	480	
			3	30	960	
PUCCH/PUSCH subcarrier spacing		kHz	1	15	120	
			2	30	480	
			3	30	960	
PRACH configuration			1,2,3	FR1 PRACH configuration 1	FR2 PRACH configuration 1	
TRS configuration			1	TRS.1.1 FDD	TRS.2.1 TDD	
			2	TRS.1.1 TDD	TBD	
			3	TRS.1.2 TDD	TBD	
PDSCH/PDCCH TCI state			1,2,3	-	TCI.State.2	
BWP configuraiton	Initial DL BWP		1,2,3	DLBWP.0.1	DLBWP.0.1	
	Dedicated DL BWP		1,2,3	LBWP.1.1	DLBWP.1.1	
	Initial UL BWP		1,2,3	ULBWP.0.1	ULBWP.0.1	
	Dedicated UL BWP		1,2,3	ULBWP.1.1	ULBWP.1.1	
EPRE ratio of PSS to SSS		dB		0	0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15k Hz					
N_{oc}^{Note2}	dBm/SC S	1	-95.7			
		2	-89.7			
		3	-86.7			
$\hat{E}_s/I_{ot}$	dB		-Infinity	7		
$\hat{E}_s/N_{oc}$	dB		-Infinity	7		
I_o^{Note3}	dBm/95.0 4 MHz Note4		-58.9	-58.9		
	dBm/380. 16 MHz Note4		-52.9	-52.9		
Propagation condition		-		AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.3.1.11.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 772 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{\text{interrupt}}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{\text{interrupt}}$ = 762 ms in the test. $T_{\text{interrupt}}$ is defined in clause 6.1.1.4.2.

This gives a total of 772 ms.

A.7.3.2 RRC Connection Mobility Control

A.7.3.2.1 SA: RRC Re-establishment

A.7.3.2.1.1 Intra-frequency RRC Re-establishment in FR2

A.7.3.2.1.1.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR2 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.7.3.2.1.1.1-1, table A.7.3.2.1.1.1-2 and table A.7.3.2.1.1.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure.

Table A.7.3.2.1.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.2.1.1.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1	
Time offset between cells			1	3 μ s	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	0	Radio link failure timer; T310 is disabled
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
SMTC configuration			1	SMTC pattern 1	
DRX cycle length		s	1	OFF	

PRACH configuration		1	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1	s	1	5	
T2	s	1	4.84	Time for the UE to detect RLF (Summation of $T_{\text{Evaluate_out_SSB}}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3	s	1	5	

Table A.7.3.2.1.1.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams ^{Note 4}			Rough			Rough		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
BW _{channel}	MHz	1	100: N _{RB,c} = 66			100: N _{RB,c} = 66		
Data RBs allocated		1	24			24		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
TRS configuration		1	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
AoA setup		1	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s/I_{ot}$	dB	1	-0.12	-infinity	-infinity	-3.46	2	2
N_{oc} ^{Note2}	dBm/15 kHz	1	-104.7					
N_{oc} ^{Note2}	dBm/SCS	1	-95.7					
$\hat{E}_s/N_{oc}$	dB	1	4	-infinity	-infinity	2	2	2
SS-RSRP ^{Note3}	dBm/SCS	1	-91.7	-infinity	-infinity	-93.7	-93.7	-93.7
I _o	dBm/95.04 MHz	1	-59.64	-62.59	-62.59	-59.94	-62.59	-62.59
Propagation Condition		1	AWGN					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation								

A.7.3.2.1.1.2 Test Requirements

The RRC re-establishment delay is defined as the time from the moment UE declares RLF, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell shall be less than 5 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 1$$

$$T_{\text{identify_intra_NR}} = 3520 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 4865 ms for RRC re-establishment delay, allow 9.84 s (4.84 s + 5 s) from the beginning of T2 in the test case.

A.7.3.2.1.2 Inter-frequency RRC Re-establishment in FR2

A.7.3.2.1.2.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR2 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.7.3.2.1.2.1-1, table A.7.3.2.1.2.1-2 and table A.7.3.2.1.2.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.7.3.2.1.2.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.2.1.2.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR2

Parameter	Unit	Test configuration	Value	Comment
-----------	------	--------------------	-------	---------

Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1, 2	
Time offset between cells			1	3 μ s	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	0	Radio link failure timer; T310 is disabled
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
SMTC configuration			1	SMTC pattern 1	
DRX cycle length		s	1	OFF	
PRACH configuration			1	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1		s	1	5	
T2		s	1	4.84	Time for the UE to detect RLF (Summation of $T_{\text{Evaluate_out_SSB}}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3		s	1	6	

Table A.7.3.2.1.2.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams ^{Note 4}			Rough			Rough		
AoA setup		1	Setup 3 as specified in clause A.3.15					
			AoA1			AoA2		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
BW _{channel}	MHz	1	100: $N_{RB,c} = 66$			100: $N_{RB,c} = 66$		
Data RBs allocated		1	24			24		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
TRS configuration		1	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		

RLM-RS		1	SSB			SSB		
N_{oc} Note2	dBm/15 kHz	1	-92.1			-92.1		
N_{oc} Note2	dBm/SCS	1	-83.1			-83.1		
$\hat{E}_s / N_{oc}$	dB	1	0	-infinity	-infinity	-infinity	-infinity	0
$\hat{E}_s / I_{ot_BB}$ Note 5	dB	1	-1.01	-infinity	-infinity	-infinity	-infinity	-1.01
SSB_RP Note3	dBm/SCS	1	-83.1	-infinity	-infinity	-infinity	-infinity	-83.1
Io	dBm/95.04 MHz	1	-55.46	-58.51	-58.51	-58.51	-58.51	-55.46
Propagation Condition		1	AWGN			AWGN		
Note 1:	OCNG shall be used such that a constant total transmitted power is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation							
Note 5:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _s from TS 38.101-2 [19] Table 6.2.1.3-4.							

A.7.3.2.1.2.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 2$$

$$T_{\text{identify_intra_NR}} = 1600 \text{ ms}$$

$$T_{\text{identify_inter_NR}} = 2080 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 5025 ms, allow 6 s in the test case.

A.7.3.2.1.3 Intra-frequency RRC Re-establishment in FR2 without serving cell timing

A.7.3.2.1.3.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR2 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.7.3.2.1.3.1-1, table A.7.3.2.1.3.1-2 and table A.7.3.2.1.3.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.7.3.2.1.3.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.2.1.3.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1	
Time offset between cells			1	3 μ s	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	6000	Radio link failure timer configured by <i>RLF-TimersAndConstants</i>
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
SMTC configuration			1	SMTC pattern 1	
DRX cycle length		s	1	OFF	
PRACH configuration			1	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1		s	1	5	
T2		s	1	10.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3		s	1	5	

Table A.7.3.2.1.3.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams ^{Note 4}			Rough			Rough		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 FDD			CR.3.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 FDD			CCR.3.1 FDD		
TRS configuration		1	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
AoA setup		1	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s / I_{ot}$	dB	1	5	-infinity	-infinity	-infinity	-infinity	5
N_{oc} ^{Note2}	dBm/15 kHz	1	-104.7					
N_{oc} ^{Note2}	dBm/SCS	1	-95.7					
$\hat{E}_s / N_{oc}$	dB	1	5	-infinity	-infinity	-infinity	-infinity	5
SS-RSRP ^{Note3}	dBm/SCS	1	-90.7	-infinity	-infinity	-infinity	-infinity	-90.7
I _o	dBm/95.04 MHz	1	-60.52	-66.71	-60.52	-60.52	-66.71	-60.52
Propagation Condition		1	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers							
Note 3:	and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation							

A.7.3.2.1.3.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 5 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$$N_{freq} = 1$$

$$T_{identify_intra_NR} = 3520 \text{ ms}$$

$T_{SI} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 [2] for the target intra-frequency NR cell.

$T_{PRACH} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 4865 ms, allow 5 s in the test case.

A.7.3.2.1.4 Intra-frequency RRC Re-establishment in FR2-2

A.7.3.2.1.4.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR2-2 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.7.3.2.1.4.1-1, table A.7.3.2.1.4.1-2 and table A.7.3.2.1.4.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure.

Table A.7.3.2.1.4.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 480 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
3	NR 960 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.2.1.4.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR2-2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1,2,3	Cell1	
	Neighbour cells		1,2,3	Cell2	
Final condition	Active cell		1,2,3	Cell2	
RF Channel Number			1,2,3	1	
Time offset between cells			1,2,3	3 μ s	Synchronous cells
N310		-	1,2,3	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1,2,3	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1,2,3	0	Radio link failure timer; T310 is disabled

T311	ms	1,2,3	5000	RRC re-establishment timer
Access Barring Information	-	1,2,3	Not Sent	No additional delays in random access procedure.
SSB configuration		1,2,3	SSB.1 FR2	
SMTC configuration		1,2,3	SMTC pattern 1	
DRX cycle length	s	1,2,3	OFF	
PRACH configuration		1,2,3	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1	s	1,2,3	5	
T2	s	1,2,3	4.84	Time for the UE to detect RLF (Summation of $T_{\text{Evaluate_out_SSB}}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3	s	1,2,3	5	

Table A.7.3.2.1.4.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR2-2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams ^{Note 4}		1,2,3	Rough			Rough		
TDD configuration		1,2,3	TDDConf.3.1			TDDConf.3.1		
BW _{channel}	MHz	1	100: N _{RB,c} = 66			100: N _{RB,c} = 66		
Data RBs allocated		1	24			24		
PDSCH RMC configuration		1,2,3	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1,2,3	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1,2,3	CCR.3.1 TDD			CCR.3.1 TDD		
TRS configuration		1,2,3	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1,2,3	TCI.State.2			N/A		
OCNG Pattern		1,2,3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1,2,3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1,2,3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1,2,3	SSB			SSB		
AoA setup		1,2,3	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s / I_{\text{ot}}$	dB	1,2,3	-0.12	-infinity	-infinity	-3.46	2	2
N_{oc} ^{Note2}	dBm/15 kHz	1,2,3	-104.7					
N_{oc} ^{Note2}	dBm/SCS	1	-95.7					
		2	-95.7					
		3	-92.7					
$\hat{E}_s / N_{\text{oc}}$	dB	1,2,3	4	-infinity	-infinity	2	2	2
SS-RSRP ^{Note3}	dBm/SCS	1	-91.7	-infinity	-infinity	-93.7	-93.7	-93.7
		2	TBD	TBD	TBD	TBD	TBD	TBD
		3	TBD	TBD	TBD	TBD	TBD	TBD
I _o	dBm/95.04 MHz	1	-59.64	-62.59	-62.59	-59.94	-62.59	-62.59
	dBm/380.16 MHz	2	TBD	TBD	TBD	TBD	TBD	TBD

	dBm/380.16 MHz	3	TBD	TBD	TBD	TBD	TBD	TBD
Propagation Condition		1,2,3	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation							

A.7.3.2.1.4.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell shall be less than 5 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 1$$

$$T_{\text{identify_intra_NR}} = 3520 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 4865 ms, allow 5 s in the test case.

A.7.3.2.1.5 Inter-frequency RRC Re-establishment in FR2-2

A.7.3.2.1.5.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR2-2 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.7.3.2.1.5.1-1, table A.7.3.2.1.5.1-2 and table A.7.3.2.1.5.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.7.3.2.1.5.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 480 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
3	NR 960 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.2.1.5.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR2-2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1,2,3	Cell1	
	Neighbour cells		1,2,3	Cell2	
Final condition	Active cell		1,2,3	Cell2	
RF Channel Number			1,2,3	1, 2	
Time offset between cells			1,2,3	3 μ s	Synchronous cells
N310		-	1,2,3	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1,2,3	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1,2,3	0	Radio link failure timer; T310 is disabled
T311		ms	1,2,3	5000	RRC re-establishment timer
Access Barring Information		-	1,2,3	Not Sent	No additional delays in random access procedure.
SSB configuration			1,2,3	SSB.1 FR2	
SMTC configuration			1,2,3	SMTC pattern 1	
DRX cycle length		s	1,2,3	OFF	
PRACH configuration			1,2,3	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1		s	1,2,3	5	
T2		s	1,2,3	4.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3		s	1,2,3	6	

Table A.7.3.2.1.5.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR2-2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams ^{Note 4}			Rough			Rough		
AoA setup		1,2,3	Setup 3 as specified in clause A.3.15					
			AoA1			AoA2		
TDD configuration		1,2,3	TDDConf.3.1			TDDConf.3.1		
BW _{channel}	MHz	1	100: N _{RB,C} = 66			100: N _{RB,C} = 66		
Data RBs allocated		1	24			24		

PDSCH RMC configuration		1,2,3	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1,2,3	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1,2,3	CCR.3.1 TDD			CCR.3.1 TDD		
TRS configuration		1,2,3	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1,2,3	TCI.State.2			N/A		
OCNG Pattern		1,2,3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1,2,3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1,2,3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1,2,3	SSB			SSB		
N_{oc} ^{Note2}	dBm/15 kHz	1,2,3	-92.1			-92.1		
N_{oc} ^{Note2}	dBm/SCS	1	-83.1			-83.1		
		2	TBD			TBD		
		3	TBD			TBD		
$\hat{E}_s / N_{oc}$	dB	1,2,3	0	-infinity	-infinity	-infinity	-infinity	0
$\hat{E}_s / I_{ot_BB}$ ^{Note 5}	dB	1,2,3	-1.01	-infinity	-infinity	-infinity	-infinity	-1.01
SSB_RP ^{Note3}	dBm/SCS	1	-83.1	-infinity	-infinity	-infinity	-infinity	-83.1
		2	TBD	TBD	TBD	TBD	TBD	
		3	TBD	TBD	TBD	TBD	TBD	
Io	dBm/95.04 MHz	1	-55.46	-58.51	-58.51	-58.51	-58.51	-55.46
	dBm/380.16 MHz	2	TBD	TBD	TBD	TBD	TBD	TBD
	dBm/380.16 MHz	3	TBD	TBD	TBD	TBD	TBD	TBD
Propagation Condition		1,2,3	AWGN			AWGN		
Note 1: OCNG shall be used such that a constant total transmitted power is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation								
Note 5: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMBs from TS 38.101-2 [19] Table 6.2.1.3-4.								

A.7.3.2.1.5.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay} = 50 \text{ ms} + T_{identify_intra_NR} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR,i} + T_{SI-NR} + T_{PRACH}$$

$$N_{freq} = 2$$

$$T_{identify_intra_NR} = 1600 \text{ ms}$$

$$T_{identify_inter_NR} = 2080 \text{ ms}$$

$T_{SI} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

$T_{PRACH} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 5025 ms, allow 6 s in the test case.

A.7.3.2.1.6 Intra-frequency RRC Re-establishment in FR2-2 without serving cell timing

A.7.3.2.1.6.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR2-2 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1.

The test parameters are given in table A.7.3.2.1.6.1-1, table A.7.3.2.1.6.1-2 and table A.7.3.2.1.6.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.7.3.2.1.6.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 480 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
3	NR 960 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.3.2.1.6.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR2-2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1,2,3	Cell1	
	Neighbour cells		1,2,3	Cell2	
Final condition	Active cell		1,2,3	Cell2	
RF Channel Number			1,2,3	1	
Time offset between cells			1,2,3	3 μ s	Synchronous cells
N310		-	1,2,3	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1,2,3	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1,2,3	6000	Radio link failure timer configured by <i>RLF-TimersAndConstants</i>
T311		ms	1,2,3	5000	RRC re-establishment timer

Access Barring Information	-	1,2,3	Not Sent	No additional delays in random access procedure.
SSB configuration		1,2,3	SSB.1 FR2	
SMTC configuration		1,2,3	SMTC pattern 1	
DRX cycle length	s	1,2,3	OFF	
PRACH configuration		1,2,3	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1	s	1,2,3	5	
T2	s	1,2,3	10.84	Time for the UE to detect RLF (Summation of $T_{\text{Evaluate_out_SSB}}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3	s	1,2,3	5	

Table A.7.3.2.1.6.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR2-2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams ^{Note 4}			Rough			Rough		
TDD configuration		1,2,3	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1,2,3	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1,2,3	CR.3.1 FDD			CR.3.1 FDD		
Dedicated CORESET RMC configuration		1,2,3	CCR.3.1 FDD			CCR.3.1 FDD		
TRS configuration		1,2,3	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1,2,3	TCI.State.2			N/A		
OCNG Pattern		1,2,3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1,2,3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1,2,3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1,2,3	SSB			SSB		
AoA setup		1,2,3	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s / I_{\text{ot}}$	dB	1,2,3	5	-infinity	-infinity	-infinity	-infinity	5
N_{oc} ^{Note2}	dBm/15 kHz	1,2,3	-104.7					
N_{oc} ^{Note2}	dBm/SCS	1	-95.7					
		2	-95.7					
		3	-92.7					
$\hat{E}_s / N_{\text{oc}}$	dB	1,2,3	5	-infinity	-infinity	-infinity	-infinity	5
SS-RSRP ^{Note3}	dBm/SCS	1	-90.7	-infinity	-infinity	-infinity	-infinity	-90.7
		2	TBD	TBD	TBD	TBD	TBD	TBD
		3	TBD	TBD	TBD	TBD	TBD	TBD
I _o	dBm/95.04 MHz	1	-60.52	-66.71	-60.52	-60.52	-66.71	-60.52
	dBm/380.16 MHz	2	TBD	TBD	TBD	TBD	TBD	TBD
	dBm/380.16 MHz	3	TBD	TBD	TBD	TBD	TBD	TBD
Propagation Condition		1,2,3	AWGN					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.2.1.6.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 5 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 1$$

$$T_{\text{identify_intra_NR}} = 3520 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 [2] for the target intra-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 4865 ms, allow 5 s in the test case.

A.7.3.2.2 Random Access

A.7.3.2.2.1 4-step RA type c ontention based random access test in FR2 for NR Standalone

A.7.3.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell or SCell in FR2. Supported test parameters are shown in Table A.7.3.2.2.1.1-1. UE capable of SA with PCell or SCell in FR2 needs to be tested by using the parameters in Table A.7.3.2.2.1.1-2 and Table A.7.3.2.2.1.1-3.

Table A.7.3.2.2.1.1-1: Supported test configurations for contention based random access test in FR2 for NR Standalone

Config	Description
1	NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.2.2.1.1-2: General test parameters for contention based random access test in FR2 for NR Standalone

Parameter	Unit	Test-1	Comments
SSB Configuration	Config 1	SSB.1 FR2	As defined in A.3.10
CSI-RS for tracking	Config 1	TRS.2.1 TDD	
Duplex Mode for Cell 1	Config 1	TDD	
TDD Configuration	Config 1	TDDConf.3.1	As defined in A.3.1.4
BW _{channel}	Config 1	MHz	100: N _{RB,C} = 66
Data RBs allocated	Config 1		24
OCNG Pattern ^{Note 1}			OCNG pattern 1
PDSCH Reference Channel ^{Note 2}	Config 1		SR.3.1 TDD
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
NR RF Channel Number		1	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH_DMRS to SSS	dB		
EPRE ratio of PBCH to PBCH_DMRS	dB		
EPRE ratio of PDCCH_DMRS to SSS	dB		
EPRE ratio of PDCCH to PDCCH_DMRS	dB		
EPRE ratio of PDSCH_DMRS to SSS	dB		
EPRE ratio of PDSCH to PDSCH_DMRS	dB		
ss-PBCH-BlockPower	dBm/ SCS	+20 +Δ _{UL}	As defined in TS 38.331 [2]. Δ _{UL} is derived from the uplink calibration process ^{Note 3}
Configured UE transmitted power ($P_{\text{CMAX}, f, c}$)	dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
PRACH Configuration		FR2 PRACH configuration 1	As defined in A.3.8.3, with exceptions as defined below
rsrp-ThresholdSSB	dBm	RSRP_69 +Δ _{DL}	RSRP_69 corresponds to -88dBm. Δ _{DL} is derived from the downlink calibration process ^{Note 4}
preambleReceivedTargetPower	dBm	-100	As defined in TS 38.331 [2]
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required. Note 3: The Δ_{UL} value is calculated as -ROUND(PPRACH0 -1), where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied, <i>preambleReceivedTargetPower</i> = -100dBm and <i>ss-PBCH-BlockPower</i> = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH. Note 4: The Δ_{DL} value is calculated as (RSRP_{REP} – RSRP_76), where RSRP_{REP} is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.			

Table A.7.3.2.2.1.1-3: OTA-related test parameters for contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.3.15.1
Assumption for UE beams ^{Note 3}			Rough	
SSB with index 0	E_s ^{Note1}	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-80.6	
	E_s/I_{otBB}	dB	21.09	
	I_o	dBm/95.04 MHz	-56.01	I_o in symbols containing SSB index 0
SSB with index 1	E_s ^{Note1}	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-95.0	
	E_s/I_{otBB}	dB	6.69	
	I_o	dBm/95.04 MHz	-70.41	I_o in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 4)	
Note 1: No artificial noise is applied in this test. Note 2: Void. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 4: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

A.7.3.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.7.3.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.7.3.2.2.1.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A.7.3.2.2.1.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.7.3.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.7.3.2.2.2 4-step RA type n on-contention based random access test in FR2 for NR Standalone

A.7.3.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell or SCell in FR2. Supported test parameters are shown in Table A.7.3.2.2.2.1-1. UE capable of SA with PCell or SCell in FR2 needs to be tested by using the parameters in Table A.7.3.2.2.2.1-2 and Table A.7.3.2.2.2.1-3 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.7.3.2.2.2.1-1: Supported test configurations for non-contention based random access test in FR2 for NR Standalone

Config	Description
1	NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.2.2.2.1-2: General test parameters for non-contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1		SSB.1 FR2	SSB.1 FR2	As defined in A.3.10
CSI-RS for tracking	Config 1		TRS.2.1 TDD	TRS.2.1 TDD	
CSI-RS Configuration	Config 1		N/A	CSI-RS.3.1 TDD	As defined in A.3.1.4
Duplex Mode for Cell 2	Config 1		TDD	TDD	
TDD Configuration	Config 1		TDDConf.3.1	TDDConf.3.1	
BW _{channel}	Config 1	MHz	100: N _{RB,c} = 66	100: N _{RB,c} = 66	
Data RBs allocated	Config 1		24	24	
OCNG Pattern ^{Note 1}			OP.3	OP.3	As defined in A.3.2.1.
PDSCH Reference Channel ^{Note 2}	Config 1		SR3.1 TDD	SR3.1 TDD	As defined in A.3.1.1.
NR RF Channel Number			1	1	
EPRE ratio of PSS to SSS		dB	0	0	
EPRE ratio of PBCH_DMRS to SSS		dB			
EPRE ratio of PBCH to PBCH_DMRS		dB			
EPRE ratio of PDCCH_DMRS to SSS		dB			
EPRE ratio of PDCCH to PDCCH_DMRS		dB			
EPRE ratio of PDSCH_DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH_DMRS		dB			
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ _{UL}	+20 +Δ _{UL}	As defined in TS 38.331 [2].

				Δ_{UL} is derived from the uplink calibration process ^{Note 3}
Configured UE transmitted power ($P_{MAX, f,c}$)	dBm	maximum value configurable for certain power class	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
PRACH Configuration		FR2 PRACH configuration 2	FR2 PRACH configuration 3	As defined in A.3.8.3, with exceptions as defined below.
rsrp-ThresholdSSB	dBm	RSRP_69 + Δ_{DL}	RSRP_69 + Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process ^{Note 4}
preambleReceivedTargetPower	dBm	-100	-100	As defined in TS 38.331 [2]
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required. Note 3: The Δ_{UL} value is calculated as $-\text{ROUND}(\text{PPRACH0} - 1)$, where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied, <i>preambleReceivedTargetPower</i> = -100dBm and <i>ss-PBCH-BlockPower</i> = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH. Note 4: The Δ_{DL} value is calculated as $(\text{RSRP}_{\text{REP}} - \text{RSRP}_{76})$, where RSRP_{REP} is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.				

Table A.7.3.2.2.1-3: OTA-related test parameters for non-contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Test-2	Comments
AoA setup			Setup 1	Setup 1	As defined in A.3.15.1
Assumption for UE beams ^{Note 3}			Rough	Rough	
SSB with index 0	E_s^{Note1}	dBm/SCS	-80.6	-80.6	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-80.6	-80.6	
	E_s/lot_{BB}	dB	21.09	21.09	
	lo	dBm/95.04 MHz	-56.01	-56.01	lo in symbols containing SSB index 0
SSB with index 1	E_s^{Note1}	dBm/SCS	-95.0	-95.0	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-95.0	-95.0	
	E_s/lot_{BB}	dB	6.69	6.69	
	lo	dBm/95.04 MHz	-70.41	-70.41	lo in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 4)	No external noise (Note 4)	

Note 1:	No artificial noise is applied in this test.
Note 2:	void.
Note 3:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 4:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].

A.7.3.2.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.7.3.2.2.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.2.1 for SSB-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.2.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.2.1 for CSI-RS-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.2.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.3 2-step RA type contention based random access test in FR2 for NR Standalone

A.7.3.2.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the 2-step RA type random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.3 and Clause 7.1.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell or SCell in FR2. Supported test parameters are shown in Table A.7.3.2.2.3.1-1. UE capable of SA with PCell or SCell in FR2 needs to be tested by using the parameters in Table A.7.3.2.2.3.1-2 and Table A.7.3.2.2.3.1-3.

Table A.7.3.2.2.3.1-1: Supported test configurations for 2-step RA type contention based random access test in FR2 for NR Standalone

Config	Description
1	NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.2.2.3.1-2: General test parameters for 2-step RA type contention based random access test in FR2 for NR Standalone

Parameter	Unit	Test-1	Comments
SSB Configuration	Config 1	SSB.1 FR2	As defined in A.3.10
Duplex Mode for Cell 1	Config 1	TDD	
TDD Configuration	Config 1	TDDConf.3.1	As defined in A.3.1.4
BW _{channel}	Config 1	MHz	100: N _{RB,G} = 24
OCNG Pattern ^{Note 1}		OCNG pattern 1	As defined in A.3.2.1.

PDSCH Reference Channel ^{Note 2}	Config 1		SR.3.1 TDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	As defined in A.3.1.2
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 + Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink calibration process ^{Note 3}
Configured UE transmitted power ($P_{CMAX, f, c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
MsgA Configuration			FR2 MsgA configuration 1	As defined in A.3.20.3, with exceptions as defined below
<i>msgA-RSRP-ThresholdSSB</i>		dBm	RSRP_69 + Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process ^{Note 4}
preambleReceivedTargetPower		dBm	-100	As defined in TS 38.331 [2]
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required. Note 3: The Δ_{UL} value is calculated as $-\text{ROUND}(\text{PMsgA0} - 1)$, where PMsgA0 is the measured first MsgA PRACH power with -80.6dBm/SCS applied, <i>msgA-PreambleReceivedTargetPower</i> = -100dBm and <i>ss-PBCH-BlockPower</i> = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send MsgA. Note 4: The Δ_{DL} value is calculated as $(\text{RSRP}_{\text{REP}} - \text{RSRP}_{76})$, where RSRP_REP is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.				

Table A.7.3.2.3.1-3: OTA-related test parameters for 2-step RA type contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
AoA setup			Setup 2b	As defined in A.3.15.1
Assumption for UE beams ^{Note 2}			Rough	
SSB with index 0	E_s ^{Note1}	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured <i>msgA-RSRP-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-80.6	
	E_s/lot_{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	E_s ^{Note1}	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured <i>msgA-RSRP-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-95.0	

	Es/Iot _{BB}	dB	6.69	
	I _o	dBm/95.04 MHz	-70.41	I _o in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 3)	
Note 1: No artificial noise is applied in this test. Note 2: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

A.7.3.2.2.3.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.7.3.2.2.3.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.1.1 the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB*.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA PRACH power with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.3.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.1.2 the System Simulator shall transmit a MsgB containing a fallbackRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit MsgA with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA PRACH shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA PRACH power with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.3.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.1.3 the System Simulator shall transmit a MsgB containing a fallbackRAR message and Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA PRACH shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA PRACH power with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.4 2-step RA type n on-contention based random access test in FR2 for NR Standalone

A.7.3.2.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.3 and Clause 7.1.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell or SCell in FR2. Supported test parameters are shown in Table A.7.3.2.2.4.1-1. UE capable of SA with PCell or SCell in FR2 needs to be tested by using the parameters in Table A.7.3.2.2.4.1-2 and Table A.7.3.2.2.4.1-3.

Table A.7.3.2.2.4.1-1: Supported test configurations for non-contention based random access test for 2-step RA type in FR2 for NR Standalone

Config	Description
1	NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.2.2.4.1-2: General test parameters for non-contention based random access test for 2-step RA type in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.1 FR2	As defined in A.3.10
Duplex Mode for Cell 2	Config 1		TDD	
TDD Configuration	Config 1		TDDConf.3.1	
BW _{channel}	Config 1	MHz	100: N _{RB,c} = 24	
OCNG Pattern ^{Note 1}			OP.3	As defined in A.3.2.1.
PDSCH Reference Channel ^{Note 2}	Config 1		SR3.1 TDD	As defined in A.3.1.1.
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ _{UL}	As defined in TS 38.331 [2]. Δ _{UL} is derived from the uplink

			calibration process Note 3
Configured UE transmitted power ($P_{\text{CMAX},f,c}$)	dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
MsgA Configuration		FR2 MsgA configuration 2	As defined in A.3.20.3, with exceptions as defined below.
msgA-RSRP-ThresholdSSB	dBm	$\text{RSRP}_{69} + \Delta_{\text{DL}}$	RSRP_{69} corresponds to - 88dBm. Δ_{DL} is derived from the downlink calibration process Note 4
msgA-PreambleReceivedTargetPower	dBm	-100	As defined in TS 38.331 [2]
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required. Note 3: The Δ_{UL} value is calculated as $-\text{ROUND}(\text{PMsgA0} - 1)$, where PMsgA0 is the measured first MsgA PRACH power with -80.6dBm/SCS applied, $\text{msgA-PreambleReceivedTargetPower} = -100\text{dBm}$ and $\text{ss-PBCH-BlockPower} = 20\text{dBm}$. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send MsgA. Note 4: The Δ_{DL} value is calculated as $(\text{RSRP}_{\text{REP}} - \text{RSRP}_{76})$, where RSRP_{REP} is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.			

Table A.7.3.2.4.1-3: OTA-related test parameters for non-contention based random access test for 2-step RA type in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.3.15.1
Assumption for UE beams Note 2			Rough	
SSB with index 0	E_s^{Note1}	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured <i>msgA-RSRP-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-80.6	
	$E_s/\text{lot}_{\text{BB}}$	dB	21.09	
	lo	dBm/95.04 MHz	-56.01	lo in symbols containing SSB index 0
SSB with index 1	E_s^{Note1}	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured <i>msgA-RSRP-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-95.0	
	$E_s/\text{lot}_{\text{BB}}$	dB	6.69	
	lo	dBm/95.04 MHz	-70.41	lo in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 3)	
Note 1: No artificial noise is applied in this test. Note 2: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

A.7.3.2.2.4.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.7.3.2.2.4.2.1 MsgA Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.3.2.1 for MsgA transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA PRACH power with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.4.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.2.2 the System Simulator shall transmit a MsgB containing a successRAR MAC subPDU corresponding to the transmitted Random Access Preamble after 3 MsgA transmissions have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB if the MsgB contains a successRAR MAC subPDU corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power if all received Random Access Response Reception has not been considered as successful.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA PRACH power with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.4.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.2.3 the System Simulator shall transmit a MsgB corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA*.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in

clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA PRACH power with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.3 SA: RRC Connection Release with Redirection

A.7.3.2.3.1 Redirection from NR in FR2 to NR in FR2

A.7.3.2.3.1.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to NR requirements specified in clause 6.2.3.2.1.

A.7.3.2.3.1.2 Test Parameters

Supported test configurations are shown in table A.7.3.2.3.1.2-1. The time delay is tested by using the parameters in table A.7.3.2.3.1.2-2, and A.7.3.2.3.1.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.7.3.2.3.1.2-1: Redirection from NR to NR test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.2.3.1.2-2: General test parameters for Redirection from NR to NR test case

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	3.2	

Table A.7.3.2.3.1.2-3: Cell specific test parameters for Redirection from NR to NR test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Assumption for UE beams ^{Note 6}		Rough		Rough	
AoA setup		Setup 1 as defined in A.3.15			
NR RF Channel Number		1		2	
Duplex mode		TDD			
TDD configuration		TDDConf.3.1			
BW _{channel}	MHz	100: N _{RB,C} = 66			
BWP BW	MHz	100: N _{RB,C} = 66			
Data RBs allocated		66			
DRx Cycle	ms	Not Applicable			
PDSCH Reference measurement channel		SR3.1 TDD			

RMSI CORESET Reference Channel			CR3.1 TDD			
Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			O P. 1			
SMTC configuration			SMTC.1			
SSB Configuration			SSB.3 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}		dBm/15kHz _z	-104.7		-104.7	
N_{oc}^{Note2}		dBm/SCS	-95.7		-95.7	
$\hat{E}_s/I_{ot}$		dB	5	5	-Infinity	5
$\hat{E}_s/N_{oc}$		dB	5	5	-Infinity	5
I_o^{Note3}		dBm/ BW	-60.5	-60.5	-66.7	-60.5
Propagation condition		-	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.3.2.3.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 3160 ms from the beginning of time period T2.

The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{\text{connection_release_redirect_NR}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-NR}} + T_{\text{SI-NR}} + T_{\text{RACH}},$$

where:

$T_{\text{RRC_procedure_delay}} = 110$ ms in the test.

$T_{\text{identify-NR}} = 1760$ ms in the test.

$T_{\text{SI-NR}} = 1280$ ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

$T_{\text{RACH}} = 10$ ms in the test.

This gives a total of 3160 ms.

A.7.3.3 Conditional Handover

A.7.3.3.1 Intra-frequency conditional handover from FR2 to FR2

A.7.3.3.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-NR FR2 intra frequency conditional handover requirements specified in clause 6.1.4.4.

A.7.3.3.1.2 Test Parameters

Supported test configurations are shown in table A.7.3.3.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.7.3.3.2.2-2, and A.7.3.3.2.2-3.

The test scenario comprises of two cells. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. NR shall configure a condition implying handover to cell 2 during T1, at a time earlier than T_{RRC} before the beginning of T2. Starting T2, cell 2 becomes detectable.

Table A.7.3.3.1.2-1: Intra-frequency conditional handover from FR2 to FR2 test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.3.1.2-2: General test parameters for conditional Intra-frequency handover from FR2 to FR2

Parameter	Unit	Value	Comment
Initial conditions			
Active cell		Cell 1	
Neighbouring cell		Cell 2	
Final condition		Cell 2	
A3-Offset for condition	dBm	-1	Trigger HO to cell which may be measured as -1dB relative to cell 1. Actual SS-RSRP is 5dB stronger.
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 2	

Table A.7.3.3.1.2-3: Cell specific test parameters for NR FR2-FR2 conditional Intra frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
AoA setup			Setup 1 as defined in A.3.15			
Assumption for UE beams ^{Note 6}			Rough			
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
BW _{channel}		MHz	100: N _{RB,c} = 66			
BWP BW		MHz	100: N _{RB,c} = 66			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR3.1 TDD			
CORESET Reference Channel			CR3.1 TDD			
OCNG Patterns			OCNG pattern 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration			SSB.1 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
TCI configuration			CSI-RS.Config.0			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}		dBm/15kHz	-104.7		-104.7	
N_{oc} ^{Note2}	Config 1	dBm/SCS	-95.7		-95.7	
$\hat{E}_s/I_{otBB}$ ^{Note 8}		dB	5.03	-5.41	-Infinity	3.81
$\hat{E}_s/N_{oc}$		dB	6	6	-Infinity	11
I_o ^{Note3}	Config 1	dBm/BW	-59.7	-54.2	-59.7	-54.2
Propagation condition		-	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

Note 7:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 8:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated REFSENS requirement in TS 38.101-2 [19] clause 7.3.2, and an allowance of 1dB for UE multi-band relaxation factor Δ_{MBS} specified in TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.3.3.1.2.3 Test Requirements

$T_{RRC} + T_{Event_DU}$ occurs during T1 as the handover condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{interrupt} + T_{CHO_execution} = 1600 + 62 + 10 = 1672$ ms (power class 1) or $1080 + 62 + 10 = 1152$ (PC2/3/4) 62 ms = 1152 ms (power classes 2,3 and 4) from the start of T2 and the interruption during T2 shall not exceed $T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin} = 40 + 20 + 2 = 62$ ms excluding any transmissions which do not occur due to scheduling restrictions.

A.7.3.3.2 Inter-frequency conditional handover from FR2 to FR2; unknown target cell

A.7.3.3.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-NR FR2 inter frequency conditional handover requirements specified in clause 6.1.4.4.

A.7.3.3.2.2 Test Parameters

Supported test configurations are shown in table A.7.3.3.2-1. Both conditional handover delay and interruption length are tested by using the parameters in table A.7.3.3.2-2, and A.7.3.3.2-3.

The test scenario comprises of two carriers and one cell on each carrier. Gap pattern ID gp0 is configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. NR shall configure a condition implying handover to cell 2 during T1, at a time earlier than T_{RRC} before the beginning of T2. At the start of T2, cell 2 becomes detectable and meets the handover condition.

Table A.7.3.3.2-1: Inter-frequency conditional handover from FR2 to FR2 test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.3.3.2-2: General test parameters Inter-frequency conditional handover from FR2 to FR2

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
A3-Offset for handovercondition	dB	FFS	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 7	

Table A.7.3.3.2-3: Cell specific test parameters for NR FR2-FR2 Inter frequency conditional handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
AoA setup			Setup 1 as defined in A.3.15			
Assumption for UE beams ^{Note 6}			Rough			
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
BW _{channel}		MHz	100: N _{RB,c} = 66			
BWP BW		MHz	100: N _{RB,c} = 66			
DRx Cycle		ms	Not Applicable			
Gap pattern ID			gp0			
PDSCH Reference measurement channel			SR3.1 TDD			
CORESET Reference Channel			CR3.1 TDD			
OCNG Patterns			OCNG pattern 1			
SMTC Configuration			SMTC pattern 1			
SSB Configuration			SSB.1 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	120 kHz			
PRACH configuration			FR2 PRACH configuration 1			
TRS configuration			TRS.2.1 TDD			
TCI configuration			CSI-RS.Config.0			
BWP configuraiton	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}		dBm/15kHz	-104.7		-104.7	
N_{oc} ^{Note2}	Config 1,2	dBm/SCS	-95.7		-95.7	
	Config 3		-95.7		-95.7	
$\hat{E}_s/I_{ot}$		dB	5	5	-Infinity	5
$\hat{E}_s/N_{oc}$		dB	5	5	-Infinity	5
I_o ^{Note3}	Config 1,2	dBm/ BW	-60.5	-60.5	-66.7	-60.5
	Config 3	dBm/ BW	-60.5	-60.5	-66.7	-60.5
Propagation condition		-	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						

Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.3.3.2.3 Test Requirements

$T_{RRC} + T_{Event_DU}$ occurs during T1 as the handover condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{interrupt} + T_{CHO_execution} = 6720 + 62 + 10 \text{ ms} = 6792 \text{ ms}$ (power class 1) or $4160 + 62 + 10 \text{ ms} = 4232 \text{ ms}$ (power classes 2,3 and 4) from the start of T2 and the interruption during T2 shall not exceed $T_{interrupt} = T_{processing} + T_{IU} + T_{\Delta} + T_{margin} = 40 + 20 + 2 = 62 \text{ ms}$ excluding any transmissions which do not occur due to scheduling restrictions. excluding any transmissions which do not occur due to scheduling restrictions.

A.7.4 Timing

A.7.4.1 UE transmit timing

A.7.4.1.1 NR UE Transmit Timing Test for FR2

A.7.4.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeB and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. *highSpeedMeasFlagFR2-r17* is broadcast to UE supporting power class 6. This test will verify the requirements in clause 7.1.2.

Supported test configurations are shown in Table 7.4.1.1.1-1.

Table A.7.4.1.1.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz

For this test a single NR cell is used. Tables A.7.4.1.1.1-2 and A.7.4.1.1.1-2A define the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.7.4.1.1.1-3.

Table A.7.4.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1	Freq1	Freq1
TDD configuration		1	TDDConf.3.1	
BW _{channel}	MHz	1	100: N _{RB,c} = 66	
Data RBs allocated		1	66	
Initial BWP Configuration		1	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1	DLBWP.1.1 ULBWP.1.1	
TRS Configuration		1	TRS.2.1 TDD	
PDSCH/PDCCH TCI state		1	TCI.State.2	
DRx Cycle	ms	1	N/A	DRX.8 ^{Note5}

PDSCH Reference measurement channel		1	SR.3. 3 TDD	
RMSI CORESET Reference Channel		1	CR.3. 2 TDD	
Dedicated CORESET Reference Channel		1	CCR.3. 7 TDD	
OCNG Patterns		1	OP.1	
SSB Configuration		1	SSB.4 FR2	
SMTC Configuration		1	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1	120	
EPRE ratio of PSS to SSS	dB	1	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition		1	AWGN	
SRS Config		1	SRSConf.1 ^{Note6}	SRSConf.2 ^{Note6}
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Void				
Note 3: Void				
Note 4: Void				
Note 5: DRx related parameters are given in Table A.3.3.8-1				
Note 6: SRS configs are given in Table A.7.4.1.1.1-3				

Table A.7.4.1.1.1-2A: OTA related test parameters

Parameter	Unit	Test 1	Test 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note6}		Fine	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-112	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-100	
$\hat{E}_s/N_{oc}$	dB	4	
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-96	
$\hat{E}_s/I_{ot}$	dB	4	
I_{ot} ^{Note2}	dBm/95.04 MHz ^{Note4}	-68.5	

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS B _{RP} and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.4.1.1.1-3: SRS Configuration for Timing Accuracy Test

	Field	SRSCnf.1	SRSCnf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceSetList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	17	17	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl2560, 4	Offset to align with DRx periodicity
	sequenceId	0	0	Any 10 bit number

Table A.7.4.1.1.1-4: Void**A.7.4.1.1.2 Test requirements**

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test:

- 1) Setup NR PCell according to parameters given in Table A.7.4.1.1.1-1.
- 2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.

- a. The N_{TA} offset value (in T_c units) is 13792
 - b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1
- 3) The test system shall adjust the timing of the DL path by values given in Table A.7.4.1.1.2-1

Table A.7.4.1.1.2-1 Adjustment Value for DL Timing

SCS of SSB signals (kHz)	Adjustment Value	
	Test1	Test2
240	$+8 \cdot 64T_c$	$+4 \cdot 64T_c$

- 4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in clause 7.1.2 Table 7.1.2.1-1 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first path (in time) of DL SSB used by the UE to determine downlink timing is received from the reference cell at the UE antenna. Skip this step for test 2 with DRX configured.
- 5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first path (in time) of DL SSB used by the UE to determine downlink timing is received from the reference cell at the UE antenna. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

A.7.4.1.2 NR UE Transmit Timing Test for FR2-2

A.7.4.1.2.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeB and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2.

Supported test configurations are shown in Table A.7.4.1.2.1-1.

Table A.7.4.1.2.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note: The UE is required to be tested in the configuration with the largest supported SCS	

For this test a single NR cell is used. Tables A.7.4.1.2.1-2 and A.7.4.1.2.1-2A define the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.7.4.1.2.1-3.

Table A.7.4.1.2.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1	Freq1	Freq1
TDD configuration		1	TBD	
		2	TBD	
		3	TBD	
BW _{channel}	MHz	1	100: $N_{RB,c} = 66$	
		2	400: $N_{RB,c} = 66$	

		3	400: N _{RB,c} = 33	
Data RBs allocated		1	66	
		2	66	
		3	33	
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1	
TRS Configuration		1	TRS.2.1 TDD	
		2	TBD	
		3	TBD	
PDSCH/PDCCH TCI state		1,2,3	TCI.State.2	
DRx Cycle	ms	1,2,3	N/A	DRX.8 ^{Note5}
PDSCH Reference measurement channel		1	SR.3. 3 TDD	
		2	TBD	
		3	TBD	
RMSI CORESET Reference Channel		1	CR.3. 2 TDD	
		2	TBD	
		3	TBD	
Dedicated CORESET Reference Channel		1	CCR.3. 7 TDD	
		2	TBD	
		3	TBD	
OCNG Patterns		1,2,3	OP.1	
SSB Configuration		1	SSB.4 FR2	
		2	TBD	
		3	TBD	
SMTc Configuration		1,2,3	SMTc.1	
PDSCH/PDCCH subcarrier spacing	kHz	1	120	
		2	480	
		3	960	
EPRE ratio of PSS to SSS	dB	1	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition		1	AWGN	
SRS Config		1	SRSConf.1 ^{Note6}	SRSConf.2 ^{Note6}
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Void				
Note 3: Void				
Note 4: Void				
Note 5: DRx related parameters are given in Table A.3.3.8-1				
Note 6: SRS configs are given in Table A.7.4.1.2.1-3				

Table A.7.4.1.2.1-2A: OTA related test parameters

Parameter	Unit	Config	Test 1	Test 2
Angle of arrival configuration		1,2,3	Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 6}		1,2,3	Fine	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}		-112	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	1	-100	
		2	-94	
		3	-91	
$\hat{E}_s/N_{oc}$	dB	1,2,3	4	
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	1	-96	
		2	-90	
		3	-87	
$\hat{E}_s/I_{ot}$	dB	1,2,3	4	
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	1	-68.5	
	dBm/380.16 MHz ^{Note4}	2,3	-62.5	
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2:	SS B_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3:	Void			
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone			
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone			
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			

Table A.7.4.1.2.1-3: SRS Configuration for Timing Accuracy Test

	Field	SRSCnf.1	SRSCnf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	17	17	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	

resourceType	Periodic	Periodic	
periodicityAndOffset-p	sl1, 0	sl2560, 4	Offset to align with DRX periodicity
sequenceId	0	0	Any 10 bit number

A.7.4.1.2.2 Test requirements

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test:

- 1) Setup NR PCell according to parameters given in Table A.7.4.1.2.2-1.
- 2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.
 - a. The N_{TA} offset value (in T_c units) is 13792
 - b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1
- 3) The test system shall adjust the timing of the DL path by values given in Table A.7.4.1.2.2-1

Table A.7.4.1.2.2-1 Adjustment Value for DL Timing

SCS of SSB signals (kHz)	Adjustment Value	
	Test1	Test2
120	$+8 \times 64T_c$	$+4 \times 64T_c$
480	$+4 \times 64T_c$	$+2 \times 64T_c$
960	$+4 \times 64T_c$	$+2 \times 64T_c$

- 4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in clause 7.1.2 Table 7.1.2.1-1 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first detected path (in time) of DL SSB. Skip this step for test 2 with DRX configured.
- 5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

The rate of correct transmit timing observed during repeated tests shall be at least 90%.

A.7.4.2 UE timer accuracy

A.7.4.3 Timing advance

A.7.4.3.1 SA FR2 timing advance adjustment accuracy

A.7.4.3.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.7.4.3.1.2 Test Parameters

Supported test configurations are shown in table A.7.4.3.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.7.4.3.1.2-2, A.7.4.3.1.2-3 and A.7.4.3.1.2-4.

In all test cases, single cell is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.7.4.3.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.7.4.3.1.2-2. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3.2.1, the UE adjusts its uplink timing at slot $n+k+1$ for a timing advance command received in slot n . This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.7.4.3.1.2-1: Timing advance supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.4.3.1.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 120 kHz SCS $N_{TA_new} = N_{TA_old} + 1024 \cdot T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.7.4.3.1.2-3: Cell specific test parameters for timing advance

Parameter	Unit	Test1	
		T1	T2
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,c} = 66	
BWP BW	MHz	100: N _{RB,c} = 66	

DRx Cycle	ms	Not Applicable
PDSCH Reference measurement channel		SR.3.1 TDD
CORESET Reference Channel		CR.3.1 TDD
OCNG Patterns		OCNG pattern 1
TRS configuration		TRS.2.1 TDD
PDSCH/PDCCH TCI state		TCI.State.2
SMTC configuration		SMTC.1
SSB Configuration		SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120 kHz
PUCCH/PUSCH subcarrier spacing	kHz	120 kHz
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation condition	-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone		
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone		

Table A.7.4.3.1.2-3A: OTA related test parameters

Parameter	Unit	Test 1	
		T1	T2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 6}		Fine	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-112	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-103	
$\hat{E}_s/N_{oc}$	dB	4	
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-99	
$\hat{E}_s/I_{ot}$	dB	4	
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-68.5	

- Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
- Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
- Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
- Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
- Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.4.3.1.2-4: Sounding Reference Symbol Configuration for timing advance

Field	Value	Comment
c-SRS	16	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=4	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission

Note: For further information see clause 6.3.2 in TS 38.331 [2].

A.7.4.3.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. $k+1$ slots after the reception of the timing advance command, where $k = 11$.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.7.4.3.2 SA FR2-2 timing advance adjustment accuracy

A.7.4.3.2.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.7.4.3.2.2 Test Parameters

Supported test configurations are shown in table A.7.4.3.2.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.7.4.3.2.2-2, A.7.4.3.2.2-3 and A.7.4.3.2.2-4.

In all test cases, single cell is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.7.4.3.2.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.7.4.3.2.2-2. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3.2.1, the UE adjusts its uplink timing at slot $n+k$ for a timing advance command received in slot n . This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.7.4.3.2.2-1: Timing advance supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note: The UE is required to be tested in the configuration with the largest supported SCS	

Table A.7.4.3.2.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 120 kHz SCS $N_{TA_new} = N_{TA_old} + 1024 \cdot T_c$ For 480 kHz SCS $N_{TA_new} = N_{TA_old} + 256 \cdot T_c$ For 960 kHz SCS $N_{TA_new} = N_{TA_old} + 128 \cdot T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.7.4.3.2.2-3: Cell specific test parameters for timing advance

Parameter	Unit	Config	T1	T2
TDD configuration		1	TBD	
		2	TBD	
		3	TBD	
BW _{channel}	MHz	1	100: N _{RB,C} = 66	
		2	400: N _{RB,C} = 66	
		3	400: N _{RB,C} = 33	
Data RBs allocated		1	66	
		2	66	
		3	33	
Initial BWP Configuration		1,2,3	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1,2,3	DLBWP.1.1 ULBWP.1.1	
TRS Configuration		1	TRS.2.1 TDD	
		2	TBD	
		3	TBD	
PDSCH/PDCCH TCI state		1,2,3	TCI.State.2	
DRx Cycle	ms	1,2,3	N/A	DRX.8 ^{Note5}
PDSCH Reference measurement channel		1	SR.3. 3 TDD	
		2	TBD	
		3	TBD	
RMSI CORESET Reference Channel		1	CR.3. 2 TDD	
		2	TBD	
		3	TBD	
Dedicated CORESET Reference Channel		1	CCR.3. 7 TDD	
		2	TBD	
		3	TBD	
OCNG Patterns		1,2,3	OP.1	
SSB Configuration		1	SSB.4 FR2	
		2	TBD	
		3	TBD	
SMTc Configuration		1,2,3	SMTc.1	

Table A.7.4.3.2.2-3A: OTA related test parameters

Parameter	Unit	Config	T1	T2
Angle of arrival configuration		1,2,3	Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note6}		1,2,3	Fine	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}		-112	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	1	-100	
		2	-94	
		3	-91	
$\hat{E}_s/N_{oc}$	dB	1,2,3	4	
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	1	-96	
		2	-90	
		3	-87	
$\hat{E}_s/I_{ot}$	dB	1,2,3	4	
I _o ^{Note2}	dBm/95.04 MHz ^{Note4}	1	-68.5	
	dBm/380.16 MHz ^{Note4}	2,3	-62.5	

- Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 2: SS_B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
- Note 3: Void
- Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
- Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone
- Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.4.3.2.2-4: Sounding Reference Symbol Configuration for timing advance

Field	Value	Comment
c-SRS	16	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=0	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.7.4.3.2.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. $k+1$ slots after the reception of the timing advance command.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.7.5 Signaling characteristics

A.7.5.1 Radio link Monitoring

In the following clause, any uplink signal transmitted by the UE is used for detecting the In-/Out-of-Sync state of the UE. In terms of measurement, the uplink signal is verified on the basis of the UE output power:

Editor note: The metric for the detection of the UE UL transmitted signal by the TE is FFS.

A.7.5.1.1 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode

A.7.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.7.5.1.1.1-1. The test parameters are given in Tables A.7.5.1.1.1-2, A.7.5.1.1.1-3, and A.7.5.1.1.1-4 below. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.7.5.1.1.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure A.7.5.1.1.1-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In addition to RLM-RS radio link monitoring using SSB index 0 and SSB index 1, the UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.7.5.1.1.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.7.5.1.1.1-2: General test parameters for FR2 out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
BW _{channel}	Config 1		100: N _{RB,c} = 66
Data RBs allocated	Config 1		24
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
PRACH Configuration	Config 1		Table A.3.8.3.1
SSB index assigned as RLM RS	Config 1		0,1
OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4

	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1		TRS.2.1 TDD
T1		s	0.2
T2		s	9.68
T3		s	9.68
D1		s	9.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.7.5.1.1.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1					
			T1	T2	T3	T1	T2	T3
AoA setup			Setup 3 defined in A.3.15					
			AoA1			AoA2		
Assumption for UE beams ^{Note 5}			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
ssb-Index 0 SNR	Config 1	dB	2 ^{Note 6}	-6 ^{Note 6}	-15			
ssb-Index 1 SNR	Config 1		Not sent			2 ^{Note 6}	-15	-15
N_{oc}	Config 1	dBm/15kHz	-92.1			-92.1		
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure A.7.5.1.1.1-2					
Propagation condition			TDL-A 30ns 75Hz			TDL-A 30ns 75Hz		

Note 1:	OCNG shall be used such a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 5:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6:	This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.7.5.1.1.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0

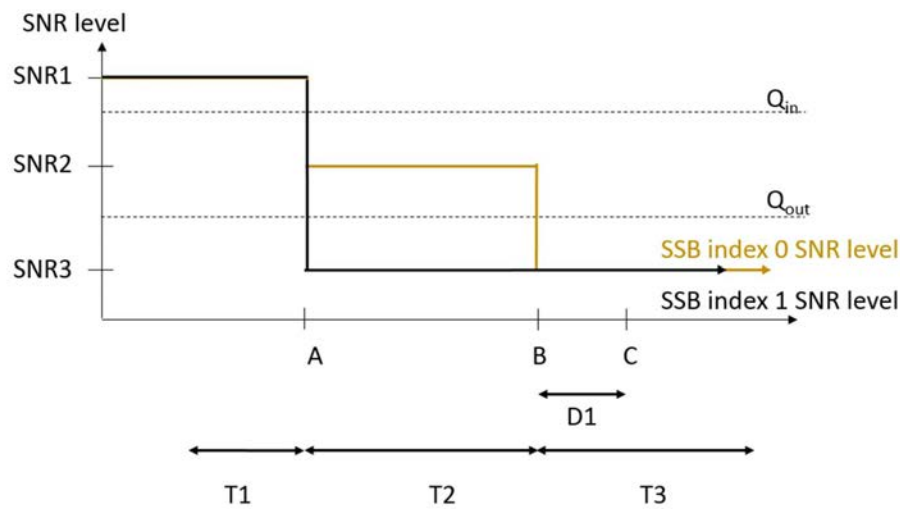


Figure A.7.5.1.1.1-1: SNR variation for out-of-sync testing

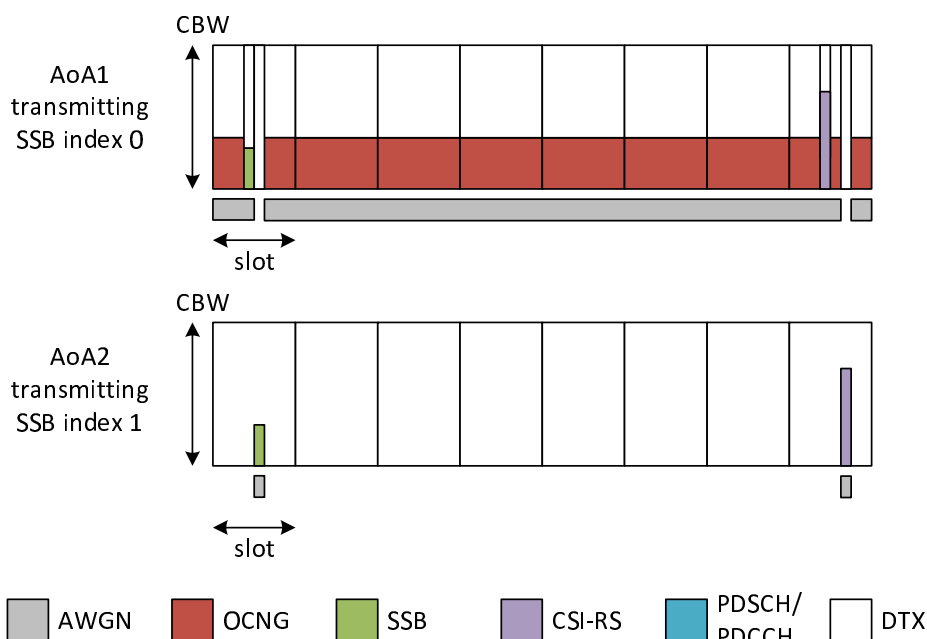


Figure A.7.5.1.1.1-2: Time multiplexed downlink transmissions

A.7.5.1.1.2 Test Requirements

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode

A.7.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.7.5.1.2.1-1. The test parameters are given in Tables A.7.5.1.2.1-2, and A.7.5.1.2.1-3 below. There is one cell (Cell 1), which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.1.2.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure A.7.5.1.2.1-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

Table A.7.5.1.2.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.7.5.1.2.1-2: General test parameters for FR2 in-sync testing in non-DRX mode

Parameter		Unit	Value Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
BW _{channel}	Config 1		100: N _{RB,c} = 66
Data RBs allocated	Config 1		24
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTc Configuration	Config 1		SMTc.3
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
PRACH Configuration	Config 1		Table A.3.8.3.1
SSB index assigned as RLM RS	Config 1		0,1
OCNG parameters			OP.5
CP length			Normal
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.

Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1		TRS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	1.88
T4		s	0.2
T5		s	3.84
D1		s	3.8
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.7.5.1.2.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1										
			T1	T2	T3	T4	T5	T1	T2	T3	T4	T5	
AoA setup			Setup 3 defined in A.3.15										
			AoA1					AoA2					
Assumption for UE beams ^{Note 5}			Rough					Rough					
EPRE ratio of PDCCH DMRS to SSS		dB	0					Not sent					
EPRE ratio of PDCCH to PDCCH DMRS		dB	0										
EPRE ratio of PBCH DMRS to SSS		dB											
EPRE ratio of PBCH to PBCH DMRS		dB											
EPRE ratio of PSS to SSS		dB											
EPRE ratio of PDSCH DMRS to SSS		dB											
EPRE ratio of PDSCH to PDSCH DMRS		dB											
EPRE ratio of OCNG DMRS to SSS		dB											
EPRE ratio of OCNG to OCNG DMRS		dB											
ssb-Index 0 SNR		Config 1	2 ^{Note 6}	-6 ^{Note 6}	-15	-15	-15						
ssb-Index 1 SNR		Config 1	Not sent					2 ^{Note 6}	-15	-15	-4.5	2 ^{Note 6}	
N_{oc}		Config 1	dBm/15kHz		-92.1					-92.1			
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure A.7.5.1.2.1-2										
Propagation condition			TDL-A 30ns 75Hz					TDL-A 30ns 75Hz					
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.													
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.													
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.													
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.													
Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.													
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband													

Table A.7.5.1.2.1-4: Void

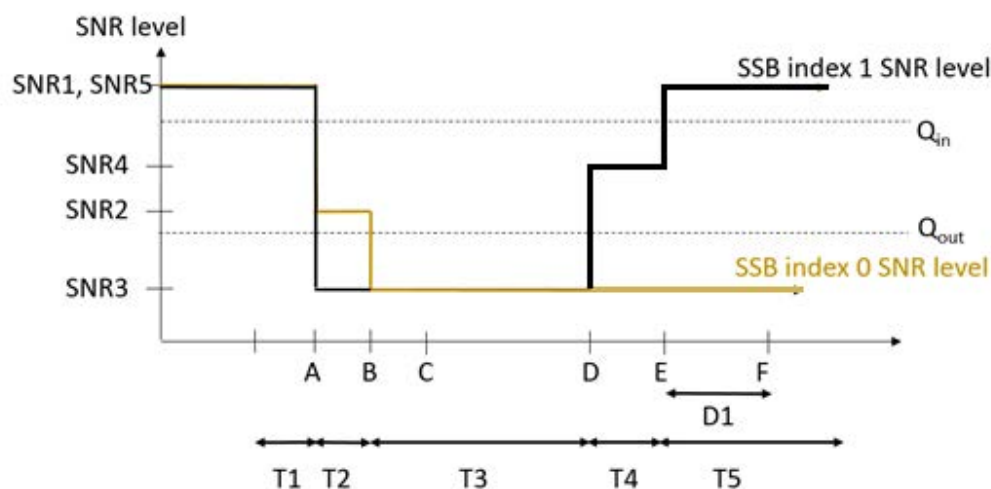


Figure A.7.5.1.2.1-1: SNR variation for in-sync testing

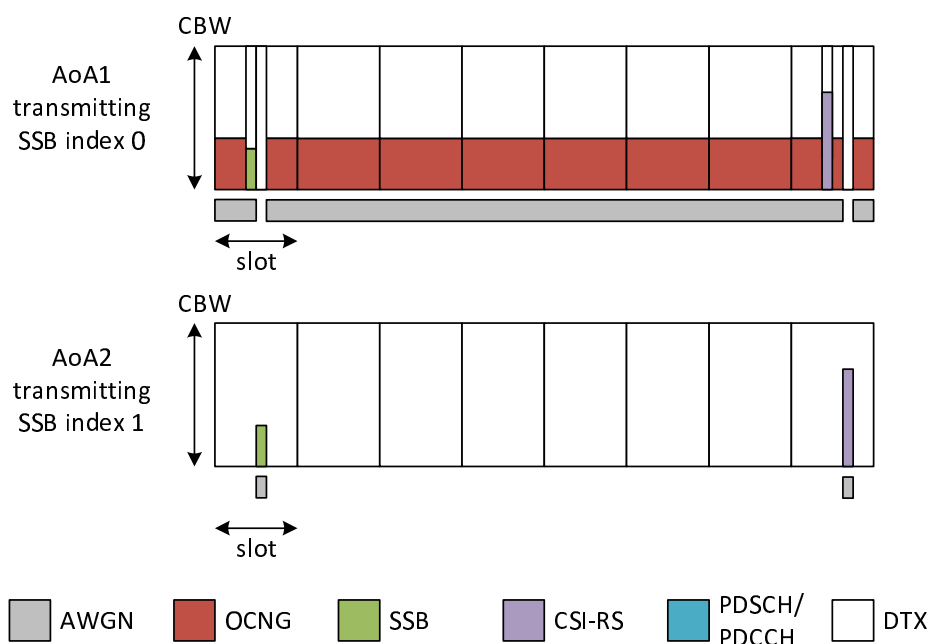


Figure A.7.5.1.2.1-2: Time multiplexed downlink transmissions

A.7.5.1.2.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.3 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

A.7.5.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.7.5.1.3.1-1. The test parameters are given in Tables A.7.5.1.3.1-2, and A.7.5.1.3.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.7.5.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.7.5.1.3.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.7.5.1.3.1-2: General test parameters for FR2 out-of-sync testing in DRX mode

Parameter		Unit	Value Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
BW _{channel}	Config 1		100: N _{RB,C} = 66
Data RBs allocated	Config 1		66
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
PRACH Configuration	Config 1		Table A.3.8.3.1
SSB index assigned as RLM RS	Config 1		0,1
OCNG parameters			OP.1
CP length			Normal
	DCI format		1-0
	Number of Control OFDM symbols		2

Out of sync transmission parameters	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1		TRS.2.1 TDD
T1		s	0.2
T2		s	14.48
T3		s	14.48
D1		s	14.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.7.5.1.3.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for out-of-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
AoA setup			Setup 1 defined in A.3.15		
Assumption for UE beams ^{Note 5}			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
ssb-Index 0 SNR	Config 1	dBm/15K Hz	² Note 6	⁻⁶ Note 6	-15
ssb-Index 1 SNR	Config 1		² Note 6	-15	-15
N_{oc}	Config 1		-104.7dBm		
Propagation condition			TDL-A 30ns 75Hz		

- | | |
|---------|---|
| Note 1: | OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | The signal contains PDCCH for UEs other than the device under test as part of OCNG. |
| Note 3: | SNR levels correspond to the signal to noise ratio over the SSS REs. |
| Note 4: | The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6. |
| Note 5: | Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation. |
| Note 6: | This value allows up to 1dB degradation from applied SNR to UE baseband. |

Table A.7.5.1.3.1-5: Void

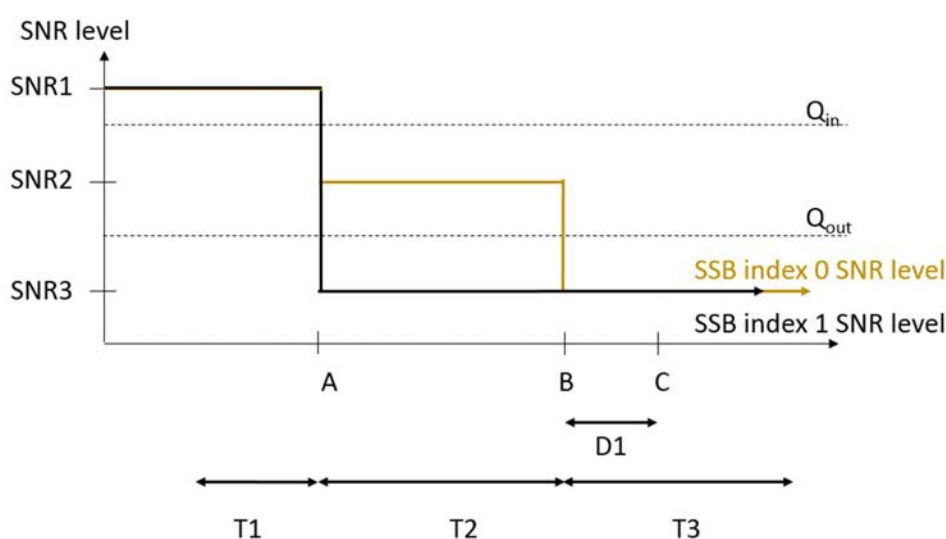


Figure A.7.5.1.3.1-1: SNR variation for out-of-sync testing

A.7.5.1.3.2 Test Requirements

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.4 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

A.7.5.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.7.5.1.4.1-1. The test parameters are given in Tables A.7.5.1.4.1-2, and A.7.5.1.4.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.1.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.7.5.1.4.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.7.5.1.4.1-2: General test parameters for FR2 in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
BW _{channel}	Config 1		100: N _{RB,C} = 66
Data RBs allocated	Config 1		66
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTTC Configuration	Config 1		SMTTC.3
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
PRACH Configuration	Config 1		Table A.3.8.3.1
SSB index assigned as RLM RS	Config 1		0,1
OCNG parameters			OP.1
CP length			Normal
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
	DCI format		1-0
	Number of Control OFDM symbols		2

Out of sync transmission parameters	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.11
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1		TRS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	2.8
T4		s	0.2
T5		s	3.88
D1		s	3.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.7.5.1.4.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for in-sync radio link monitoring test in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 5}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
ssb-Index 0 SNR	Config 1	dB	2 ^{Note 6}	-6 ^{Note 6}	-15	-4.5	2 ^{Note 6}
ssb-Index 1 SNR	Config 1		2 ^{Note 6}	-15	-15	-15	-15
N_{oc}	Config 1	dBm/1 5KHz	-104.7dBm				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.3
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
Note 5:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6:	This value allows up to 1dB degradation from applied SNR to UE baseband.

Table A.7.5.1.4.1-4: Void

Table A.7.5.1.4.1-5: Void

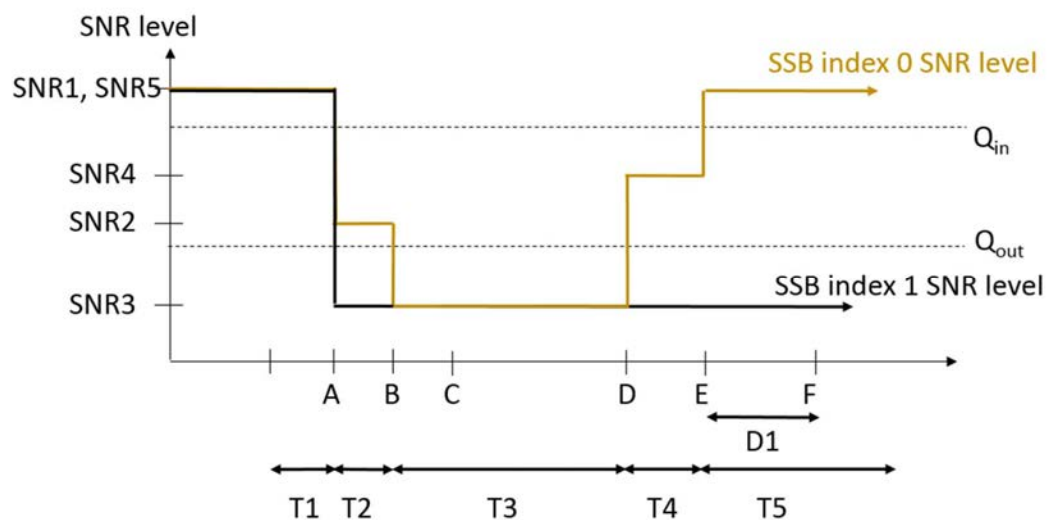


Figure A.7.5.1.4.1-1: SNR variation for in-sync testing

A.7.5.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.5 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

A.7.5.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR2 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.7.5.1.5.1-1, A.7.5.1.5.1-2, A.7.5.1.5.1-3 and A.7.5.1.5.1-4 below. There is one cell, cell 1 which is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.7.5.1.5.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.7.5.1.5.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.1.5.1-2: General test parameters for FR2 PCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
BW _{channel}	Config 1		100: N _{RB,c} = 66
Data RBs allocated	Config 1		24
BW _{occupied}	Config 1		24
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.4
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.4
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD CCR.3.6 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4

	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			*gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.35
T3		s	0.35
D1		s	0.31
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.7.5.1.5.1-3: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1					
			T1	T2	T3	T1	T2	T3
AoA setup			Setup 3 defined in A.3.15					
			AoA1			AoA2		
Assumption for UE beams ^{Note 10}			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB	0					
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR on RLM-RS1	Config 1	dB	2 ^{Note 11}	-6 ^{Note 11}	-15			
SNR on RLM-RS2	Config 1	dB	Not sent			2 ^{Note 11}	-15	-15
N _{oc}	Config 1	dBm/ 15kHz	-92.1			-92.1		
Propagation condition			TDL-C 300ns 100Hz			TDL-C 300ns 100Hz		

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
- Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.1.5.1-1.
- Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
- Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
- Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.7.5.1.5.1-4: Measurement gap configuration for FR2 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: RLM RS is partially overlapped with measurement gap	

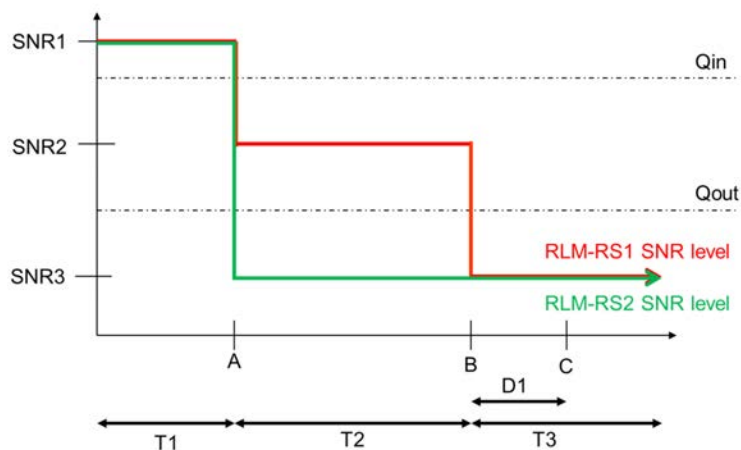


Figure A.7.5.1.5.1-1: SNR variation for CSI-RS out-of-sync testing

A.7.5.1.5.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 second after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.6 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

A.7.5.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR2 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.7.5.1.6.1-1, A.7.5.1.6.1-2 and A.7.5.1.6.1-3 below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.1.6.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. In the test, DRX configuration is not enabled. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.7.5.1.6.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.1.6.1-2: General test parameters for FR2 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
BW _{channel}	Config 1		100: N _{RB,c} = 66
Data RBs allocated	Config 1		24
BW _{occupied}	Config 1		24
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.4
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.4
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3

OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.7.5.1.6.1-3: Cell specific test parameters for FR2 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1									
		T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
AoA setup		Setup 3 defined in A.3.15									
		AoA1					AoA2				
Assumption for UE beams ^{Note 10}		Rough					Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	4					Not sent				
EPRE ratio of PDCCH to PDCCH DMRS	dB										
EPRE ratio of PBCH DMRS to SSS	dB	0									
EPRE ratio of PBCH to PBCH DMRS	dB										

EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS1	Config 1	dB	2 ^{Note 11}	-6 ^{Note 11}	-15	-15	-15
SNR on RLM-RS2	Config 1	dB	Not sent				2 ^{Note 11}
N_{oc}	Config 1	dBm/15KHz	-92.1				-92.1
Propagation condition			TDL-C 300ns 100Hz				TDL-C 300ns 100Hz

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
- Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.7.5.1.6.1-1.
- Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.
- Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
- Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.

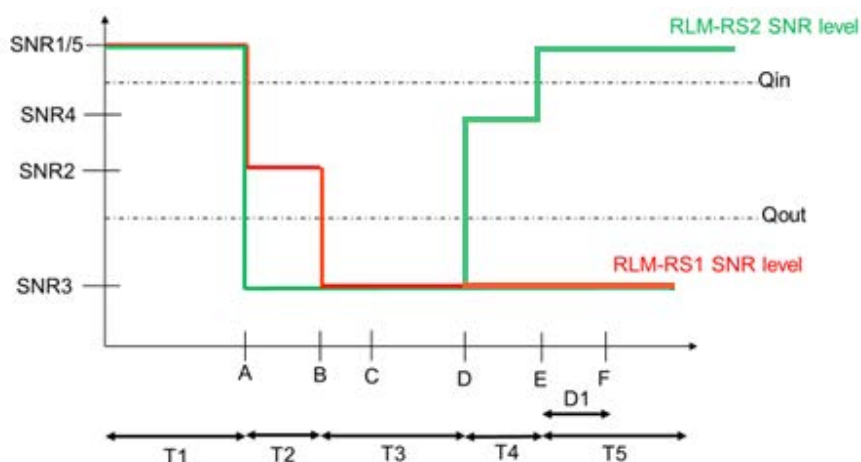


Figure A.7.5.1.6.1-1: SNR variation for CSI-RS in-sync testing

A.7.5.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.7 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

A.7.5.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR2 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.7.5.1.7.1-1, A.7.5.1.7.1-2, and A.7.5.1.7.1-3 below. There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.7.5.1.7.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.7.5.1.7.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.1.7.1-2: General test parameters for FR2 PCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD CCR.3.6 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1
CP length			Normal
	DCI format		1-0

Out of sync transmission parameters	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.7.5.1.7.1-3: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
AoA setup		dB	Setup 1 defined in A.3.15		
Assumption for UE beams ^{Note 10}			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB			
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS1	Config 1	dB	2 ^{Note 11}	-6 ^{Note 11}	-15
SNR on RLM-RS2	Config 1	dB	2 ^{Note 11}	-15	-15

N_{oc}	Config 1	dBm/15KHz	-104.7
Propagation condition		TDL-C 300ns 100Hz	
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.		
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.		
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.		
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.		
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.		
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS RES.		
Note 8:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.1.7.1-1.		
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.		
Note 10:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.		
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband.		

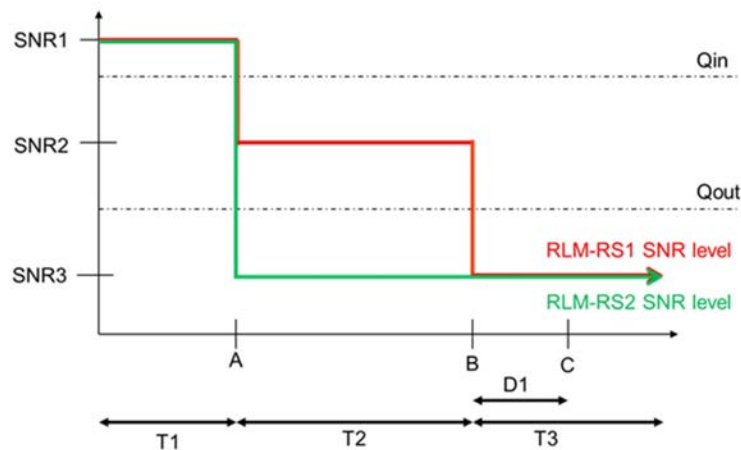


Figure A.7.5.1.7.1-1: SNR variation for CSI-RS out-of-sync testing

A.7.5.1.7.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 seconds after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.8 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

A.7.5.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR2 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.7.5.1.8.1-1, A.7.5.1.8.1-2, A.7.5.1.8.1-3 and A.7.5.1.8.1-4 below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.1.8.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.7.5.1.8.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.1.8.1-2: General test parameters for FR2 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTc Configuration	Config 1		SMTc.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1
CP length			Normal
	DCI format		1-0

Out of sync transmission parameters	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			*gp0
Layer 3 filtering			Enabled
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	1.64
T4		s	0.2
T5		s	1.88
D1		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.7.5.1.8.1-3: Cell specific test parameters for FR2 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup	dB	Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	4				
EPRE ratio of PDCCH to PDCCH DMRS	dB	0				
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					

EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS							
EPRE ratio of OCNG DMRS to SSS							
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS1	Config 1	dB	2 ^{Note 11}	-6 ^{Note 11}	-15	-4.5	2 ^{Note 11}
SNR on RLM-RS2	Config 1	dB	2 ^{Note 11}	-15	-15	-15	-15
N_{oc}	Config 1	dBm/15KHz	-104.7				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.7.5.1.8.1-1.							
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.							
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.							
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.							

Table A.7.5.1.8.1-4: Measurement gap configuration for FR2 CSI-RS in-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: RLM RS is partially overlapped with measurement gap	

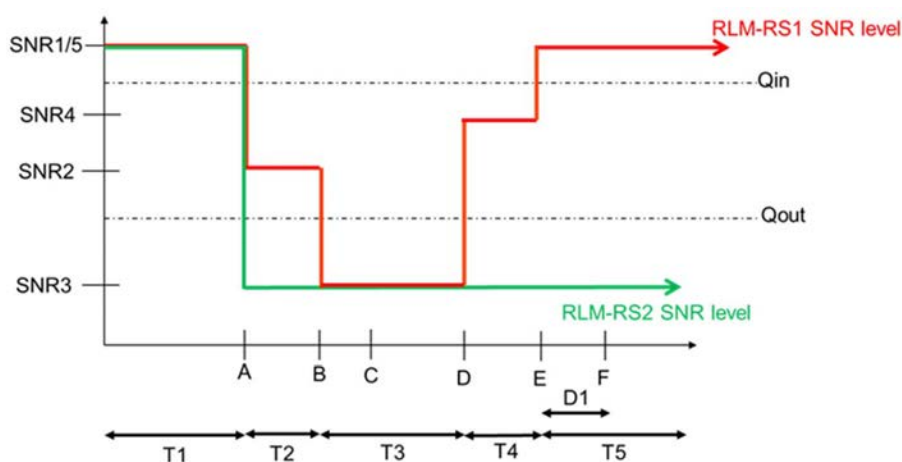


Figure A.7.5.1.8.1-1: SNR variation for CSI-RS in-sync testing

A.7.5.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.1.9 UE Radio Link Monitoring Scheduling Restrictions on FR2

A.7.5.1.9.1 Test Purpose and Environment

The purpose is to verify that the NR UE correctly follows the RLM scheduling restrictions requirements defined in clause 8.1.7. This test verifies that the UE correctly receive the PDCCH scheduled on the symbols right before the RLM SSB symbols without overlap so that it sends ACK/NACK correctly. The test case is only applicable to UE which supports `pdccch-MonitoringAnyOccasions` or `pdccch-MonitoringAnyOccasionsWithSpanGap`.

The test parameters are given in table A.7.5.1.9.1-1, table A.7.5.1.9.1-2 and table A.7.5.1.9.1-3 below. The UE is required during time period T1 to transmit ACK/NACK correctly upon scheduling of PDSCH.

Table A.7.5.1.9.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 120 kHz RMC SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.1.9.1-2: General test parameters for NR RLM scheduling restriction test case in FR2

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		1	1	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC.3	
DRX cycle length	s	1	OFF	
T1	s	1	5	During T1 the UE is required to correctly transmit ACK/NACK

Table A.7.5.1.9.1-3: Cell specific test parameters for NR RLM scheduling restriction test case in FR2

Parameter	Unit	Test configuration	Cell 1	
AoA setup		1	Setup 3 defined in A.3.15.3	
			AoA1	AoA2
Assumption for UE beams ^{Note 1}			Rough	Rough
TDD configuration		1	TDDConf.3.1	
BW _{channel}	MHz	1	100: N _{RB,c} = 66	
Data RBs allocated		1	24	
PDSCH Reference measurement channel		1	SR.3.2 TDD	Not sent
RMSI CORESET RMC configuration		1	CR.3.1 TDD	Not sent
Dedicated CORESET RMC configuration		1	CCR.3.2 TDD	Not sent
TRS configuration		1	TRS.2.1 TDD	TRS.2.2 TDD
PDCCH/PDSCH TCI state		1	TCI.State.2	N/A
OCNG Pattern		1	OP.5 defined in A.3.2.1	Not sent
Initial DL BWP configuration		1	DLBWP.0.1	
Initial UL BWP configuration		1	ULBWP.0.1	
RLM-RS		1	SSB with index 0	SSB with index 1
N_{oc}	dBm/15kHz	1	-92.1	-92.1
N_{oc} ^{Note2}	dBm/SCS	1	-83.1	-83.1
$\hat{E}_s / N_{oc}$	dB	1	2	2
$\hat{E}_s / I_{\alpha_{BB}}$ ^{Note 4}	dB	1	1	1
SSB RP ^{Note3}	dBm/SCS	1	-81.1	-81.1
Io	dBm/95.04 MHz	1	-54.35	-54.35
Time multiplexing of the downlink transmissions from each AoA		1	Defined in Figure A.7.5.1.9.1-1	
Propagation Condition		1	AWGN	AWGN
Note 1: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Calculation of Es/Iot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMBs from TS 38.101-2 [19] Table 6.2.1.3-4.				

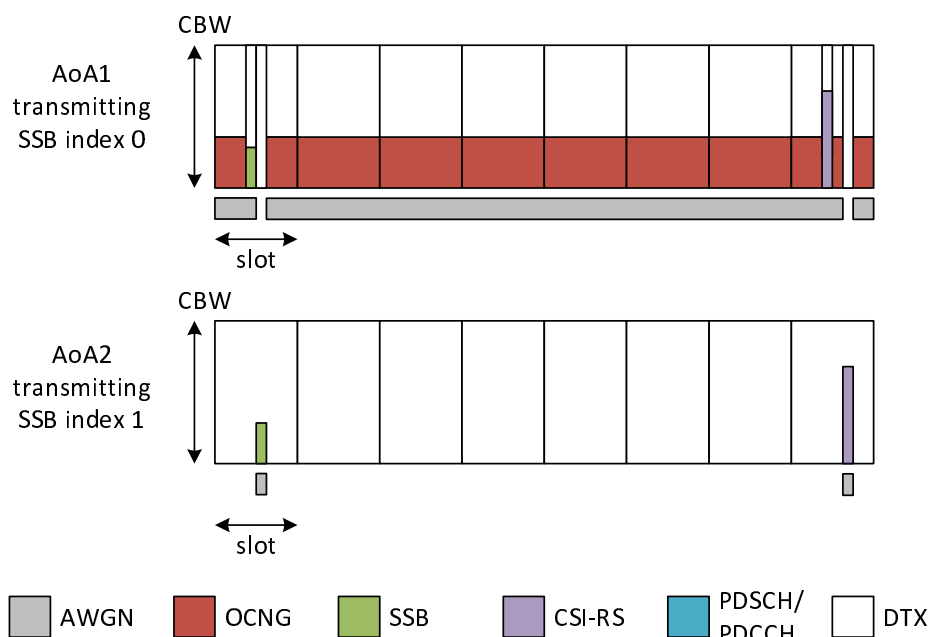


Figure A.7.5.1.9.1-1: Time multiplexed downlink transmissions

A.7.5.1.9.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.1.7.3.

The UE shall be continuously scheduled by PDCCH on the symbols right before each SSB which is not covered by SMTC during the entire length of T1. The UE shall transmit ACK/NACK for every scheduled PDCCH during the time duration T1.

A.7.5.2 Interruption

A.7.5.2.1 Interruptions during measurements on deactivated NR SCC in FR2

A.7.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE missed ACK/NACK rate does not exceed the limits at NR PSCell interruptions during the measurement on the deactivated NR SCC. This test will verify the missed ACK/NACK rate for PCell in standalone NR specified in clause 8.2.2.2. Supported test configurations are shown in table A.7.5.2.1.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.7.5.2.1.1-2 and A.7.5.2.1.1-3 below. In the test there are two cells: Cell1 and Cell2. Cell1 is PCell, Cell2 is an NR deactivated SCell. Cell1 shall be configured as PCell and Cell2 shall be configured as SCell.

The test consists of one time period, with duration of T1. Prior to the start of the time duration T1, the UE is connected to Cell1 and Cell2. The point in time at which the RRC message including *measCycleSCell* or *allowInterruptions* for the deactivated NR SCells is received at the UE antenna connector, defines the start of time period T1. During T1, PCell is continuously scheduled in DL.

Table A.7.5.2.1.1-1: Interruptions during measurements on deactivated NR SCC supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD – TDD duplex mode

Table A.7.5.2.1.1-2: General test parameters for interruptions during measurements on deactivated NR SCC in standalone NR

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR RF channels
Active PCell		Cell1	PCell on NR RF channel number 1.
Configured deactivated SCell		Cell2	Deactivated SCell on NR RF channel number 2.
CP length		Normal	Applicable to Cell1 and Cell2
DRX		OFF	
Measurement gap pattern Id		OFF	
SCell measurement cycle (measCycleSCell)	ms	640	
T1	s	10	

Table A.7.5.2.1.1-3: NR cell specific test parameters for interruptions during measurements on deactivated NR SCC in standalone NR

Parameter		Unit	Cell1	Cell2
Frequency Range			FR2	
Duplex mode			TDD	
TDD configuration			TDDConf.3.1	
BW _{channel}			100 MHz: N _{RB,c} = 66	
Data RBs allocated			66	
Initial DL BWP Configuration			DLBWP.0.2 ^{Note4}	
Initial UL BWP Configuration			ULBWP.0.2 ^{Note6}	
Downlink dedicated BWP Configuration			DLBWP.1.1	
Uplink dedicated BWP configuration			ULBWP.1.1	
PDSCH Reference measurement channel			SR.3.1 TDD	
RMSI CORESET parameters			CR.3.1 TDD	
Dedicated CORESET parameters			CCR.3.1 TDD	
OCNG Patterns			OP.1	
SMTC Configuration			SMTC.1	
SSB Configuration			SSB.1 FR2	
TCI State			TCI.State.0	
TRS Configuration			TRS.2.1 TDD	
Correlation Matrix and Antenna Configuration			1x2 Low	
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				

EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Time offset to Cell1 ^{Note 3}	μs	-	3
Propagation Condition		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Void			
Note 3: Receive time difference between slot boundaries of signals received from the two cells at the UE antenna connector including time alignment error between the two cells.			
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2 defined in clause 12 of of TS 38.213 [3].			

Table A.7.5.2.1.1-4: OTA related test parameters for interruptions during measurements on deactivated NR SCC in standalone NR

Parameter		Unit	Cell 1	Cell 2
Angle of arrival configuration			Setup1 according to table A.3.15.1	Setup 1 according to table A.3.15.1
Assumption for UE beams ^{Note 6}			Rough	Rough
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/15kHz	-104.7	-104.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/SCS	-95.7	-95.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
SSB_RP ^{Note2}	NR_TDD_FR2_A	dBm/120KH z ^{Note3}	-88.7	-88.7
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
$\hat{E}_s/N_{oc}$		dB	7	7
$\hat{E}_s/I_\alpha$		dB	7	7
I_o ^{Note2}	NR_TDD_FR2_A	dBm/95.04 MHz ^{Note4}	-58.92	-58.92
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			

	NR_TDD_FR2_Y		
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 2:	SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 3:	SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.		
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone		
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone		
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.		

A.7.5.2.1.2 Test Requirements

The UE shall be continuously scheduled on PCell during the entire length of T1. During the time duration T1 the UE shall transmit at least 99.5% of ACK/NACK on PCell.

If the NR PCell is not in the same band as the deactivated SCell, the UE is only allowed to cause interruptions on NR PCell immediately before and immediately after an SMTC. Each interruption on NR PCell shall not exceed the value defined in Table A.7.5.2.1.2-1.

If the NR PCell is in the same band as the deactivated SCell, the UE is only allowed to cause an interruption on PCell no earlier than 4 slots before an SMTC and no later than 4 slots after the SMTC. the interruption on NR PCell shall not exceed the value defined in Table A.7.5.2.1.2-2.

Table A.7.5.2.1.2-1: Interruption duration if the PCell is not in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	4

Table A.7.5.2.1.2-2: Interruption duration if the PCell is in the same band as the deactivated SCell

μ	NR Slot length (ms)	Interruption length (slot)
3	0.125	8 + SMTC duration

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.2.2 SA interruptions at NR SRS carrier-based switching

A.7.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that when a UE needs to transmit aperiodic SRS, the UE can perform SRS carrier-based switching to a carrier not configured for PUCCH/PUSCH transmission from a carrier with PUCCH/PUSCH transmission. The test will partly verify the interruption requirements on PCell in clause 8.2.2.2.9.

A.7.5.2.2.2 Test Parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the FR2 PCell. Cell 2 is an activated FR2 SCell on the TDD SCC which operates in downlink without PUCCH/PUSCH. The UE is configured with the SRS switching between PCell and SCell. The test parameters for PCell and SCell are given in Tables A.7.5.2.2.2-2, A.7.5.2.2.2-3,

and A.7.5.2.2.2-4 below. The test consists of two successive time periods, with duration of T1 and T2, respectively. Immediately at the beginning of T2, the UE is triggered for SRS switching by DCI 2_3 scheduling. After T2, the UE is expected to transmit aperiodic SRS on a special slot in the configured TDD UL/DL configuration, as scheduled by DCI 2_3. The UE shall be scheduled on PCell continuously throughout the test.

The test equipment verifies that potential interruption is carried out correctly by monitoring ACK/NACK sent in PCell.

Table A.7.5.2.2.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.5.2.2.2-2: General test parameters for SA interruptions at NR SRS carrier-based switching

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1
Configured SCell		Cell 2	Activated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of PCell
T1	s	5	
T2	ms	100	UE shall perform SRS switching during T2

Table A.7.5.2.2.2-3: Cell-specific test parameters for SA interruptions at NR SRS carrier-based switching

Parameter		Unit	Cell 1	Cell 2
Frequency Range			FR2	
Duplex mode	Config 1		TDD	
TDD configuration	Config 1		TDDConf.3.1	
BW _{channel}	Config 1	MHz	100: N _{RB,c} = 66	
Downlink initial BWP Configuration	Config 1		DLBWP.0.1	
Downlink dedicated BWP Configuration	Config 1		DLBWP.1.1	
Uplink initial BWP configuration	Config 1		ULBWP.0.1	
Uplink dedicated BWP configuration	Config 1		ULBWP.1.1	
SRS configuration	Config 1		SRS.6 TDD	
TRS configuration	Config 1		TRS.2.1 TDD	
TCI state	Config 1		TCI.State.0	
PDSCH Reference measurement channel	Config 1		SR.3.1 TDD	
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	
RMC CORESET Reference Channel	Config 1		CCR.3.1 TDD	
OCNG Patterns			OP.1	
SSB Configuration			SSB.1 FR2	
SMTC Configuration	Config 1		SMTC.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				

EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS ^{Note 1}		
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}		
$\hat{E}_s/N_{oc}$	dB	17
Propagation Condition		AWGN
NOTE 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.7.5.2.2-4: OTA related test parameters

Parameter	Unit	Test 1	
		T1	T2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 6}		Fine	
N_{oc} ^{Note 1}	dBm/15kHz ^{Note 4}	-112	
N_{oc} ^{Note 1}	dBm/SCS ^{Note 3}	-103	
$\hat{E}_s/N_{oc}$	dB	4	
SS-RSRP ^{Note 2}	dBm/SCS ^{Note 4}	-99	
$\hat{E}_s/I_{ot}$	dB	4	
I_o ^{Note2}	dBm/95.04 MHz ^{Note 4}	-68.5	
NOTE 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
NOTE 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
NOTE 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			
NOTE 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone.			
NOTE 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.			
NOTE 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.			

A.7.5.2.2.3 Test Requirements

During T2, interruption on PCell due to SRS carrier-based switching between Cell 1 and Cell 2 shall not exceed the required values specified in clause 8.2.2.2.9.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.3 SCell Activation and Deactivation Delay

A.7.5.3.1 SCell Activation and deactivation for SCell in FR2 intra-band in non-DRX

A.7.5.3.1.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.6.5.3.1.1 except the PCell and SCell are in FR2 intra-band.

The supported test configurations are shown in table A.7.5.3.1.1-1 below. The general test parameters are the same as defined in Table A.6.5.3.1.1-2 except those described in Tables A.7.5.3.1.1-2, and cell specific test parameters are described in Tables A.7.5.3.1.1-3. OTA related test parameters are shown in table A.7.5.3.1.1-4 below.

Table A.7.5.3.1.1-1: Supported test configurations for FR2 SCell activation case

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Table A.7.5.3.1.1-2: General test parameters for FR2 SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels are used for this test, cell 1 and cell2 use RF channel 1 and 2, respectively.

Table A.7.5.3.1.1-3: Cell specific test parameters for FR2 SCell activation case

Parameter ^{Note 5}	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
SSB ARFCN		freq1			freq2		
Duplex mode		TDD					
TDD configuration		TDDConf.3.1					
Downlink initial BWP Configuration		DLBWP.0.1					
Downlink dedicated BWP Configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
BW _{channel}	MHz	100: N _{RB,c} = 66					
Data RBs allocated		66		66		66	
PDSCH Reference measurement channel		SR.3.1 TDD			-		
RMSI CORESET Parameters		CR.3.1 TDD			-		
Dedicated CORESET Parameters		CCR.3.1 TDD			-		
OCNG Patterns		OP.1					
SSB Configuration		SSB.1 FR2					
SMTC Configuration		SMTC.1					
CSI-RS configuration for CSI reporting		CSI-RS.3.1 TDD					
reportConfigType		periodic			N/A		
reportQuantity		cri-RI-PMI-CQI			N/A		
CSI reporting periodicity	slot	40			N/A		
CSI reporting offset	slot	4			N/A		
EPRE ratio of PSS to SSS	dB	0					
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							

EPRE ratio of PDSCH to PDSCH_DMRS		
EPRE ratio of OCNG DMRS to SSS ^{Note 1}		
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}		
Propagation conditions		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void Note 5: Void		

Table A.7.5.3.1.1-4: OTA related test parameters for FR2 SCell activation case

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to table A.3.15.1			Setup 1 according to table A.3.15.1		
Assumption for UE beams ^{Note 7}		Rough			Rough		
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-104.7			-104.7		
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-95.7			-95.7		
$\hat{E}_s / N_{oc}$	dB	7			7		
SSB_RP ^{Note2}	dBm/SCS ^{Note4}	-88.7			-88.7		
$\hat{E}_s / I_{ot}$	dB	7			7		
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-58.92			-58.92		
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 2:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 3:	Void						
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone						
Note 5:	Void						
Note 6:	Void						
Note 7:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.						

A.7.5.3.1.2 Test Requirements

The test requirements defined in clause A.6.5.3.1.2 shall apply to this test case, except $T_{activation_time}$ will be replaced with the value $T_{FirstSSB} + 5ms$ as defined in clause 8.3.

A.7.5.3.2 SCell Activation and deactivation for FR1+FR2 inter-band with target SCell in FR2

A.7.5.3.2.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.7.5.3.1.1 except the PCell is in FR1 and SCell is in FR2.

The supported test configurations are defined in Table A.7.5.3.2.1-1. The general test parameters are the same as defined in Table A.6.5.3.1.1-2 except that the length of T2 is 2s. And cell specific test parameters are described in Tables A.7.5.3.2.1-2. OTA related test parameters are defined in Table A.7.5.3.2.1-3.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on NR. During T1 the SCell is powered off and UE is not aware of SCell.

A MAC message for activation of SCell is sent by the test equipment 100ms after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2.

During T2, the test equipment monitors the L1-RSRP measurement reporting for the SCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m+T_{L1-RSRP}$. In the next DL slot after slot $m+T_{L1-RSRP}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PCell during activation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell1 deactivation command is sent until CSI reporting for SCell1 is discontinued.

Table A.7.5.3.2.1-1: Supported test configurations for FR2 SCell activation case

Configuration	Description
1	PCell: 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	PCell: 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.7.5.3.2.1-2: Cell specific test parameters for FR2 SCell activation case

Parameter ^{Note 5}		Unit	Cell 1			Cell 2		
			T1	T2			T1	T2
SSB ARFCN			Freq1			Freq2		
Duplex mode	Config 1		FDD			TDD		
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable			TDDConf.3.1		
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
Downlink initial BWP Configuration	Config 1,2,3		DLBWP.0.1					
Downlink dedicated BWP Configuration	Config 1,2,3		DLBWP.1.1					
Uplink initial BWP configuration	Config 1,2,3		ULBWP.0.1					
Uplink dedicated BWP configuration	Config 1,2,3		ULBWP.1.1					
TRS configuration	Config 1,2,3		N/A			TRS.2.1 TDD		
TCI state	Config 1,2,3		TCI.State.0					
BW _{channel}	Config 1,2	MHz	10: N _{RB,c} = 52			100: N _{RB,c} = 66		
	Config 3		40: N _{RB,c} = 106					
Data RBs allocated	Config 1,2		52	66	52	66	52	66
	Config 3		106		106		106	

PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	-		
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
RMSI CORESET Parameters	Config 1		CR.1.1 FDD	-		
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
Dedicated CORESET Parameters	Config 1		CCR.1.1 FDD	-		
	Config 2		CCR.1.1 TDD			
	Config 3		CCR.2.1 TDD			
OCNG Patterns			OP.1			
SSB configuration	Config 1,2		SSB.1 FR1	SSB.3 FR2		
	Config 3		SSB.2 FR1			
CSI-RS configuration for CSI reporting	Config 1~3		N/A	N/A	CSI-RS.3.1 TDD Note 6	CSI-RS.3.1 TDD
reportConfigType for CSI reporting			periodic	N/A		
reportConfigType for L1-RSRP			periodic	N/A		
reportQuantity for CSI reporting			cri-RI-PMI-CQI	N/A		
reportQuantity for L1-RSRP			ssb-Index-RSRP	N/A		
CSI reporting periodicity	Config 1,2	slot	5	N/A		
	Config 3		10			
L1-RSRP reporting periodicity Note 7	Config 1,2	slot	5	N/A		
	Config 3		10			
CSI reporting offset	Config 1,2	slot	2	N/A		
	Config 3		4			
L1-RSRP reporting offset	Config 1,2	slot	2	N/A		
	Config 3		4			
SMTC configuration			SMTC.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS Note 1						
EPRE ratio of OCNG to OCNG DMRS Note 1						
Propagation conditions			N/A Link only, see clause A.3.7A		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void						
Note 3: Void						
Note 4: Void						
Note 5: All parameters apply for configuration 1, 2 and 3						
Note 6: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+T _{L1-RSRP} during T2.						
Note 7: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.						

Table A.7.5.3.2.1-3: OTA related test parameters for FR1 PCell activation case with FR2 SCell

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3

Angle of arrival configuration			N/A	According to clause A.3.15.1		
Assumption for UE beams ^{Note 7}			N/A	Rough		
N_{oc} ^{Note 1}	Config 1,2,3	dBm/15kHz	Link only, see clause A.3.7A	-104.7		
N_{oc} ^{Note 1}	Config 1,2,3	dBm/SCS		-95.7		
$\hat{E}_s / N_{oc}$	Config 1,2,3	dB		$-\infty$	7	7
ϵ_{max}	Config 1,2,3	dB		$-\infty$	7	7
SSB_RP ^{Note 2, Note 4}	Config 1,2,3	dBm/SCS		$-\infty$	-88.7	-88.7
I _o ^{Note 2, Note 4}	Config 1,2,3	dBm/95.04 MHz		-66.68	-58.92	-58.92
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 2: Es/I _{ot} , SSB_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 3: Void						
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone						
Note 5: Void						
Note 6: Void						
Note 7: Information about types of UE beam is given in B.2.1.3 and does not imit UE implementation or test system implementation.						

A.7.5.3.2.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after at least one CSI-RS transmission occasion for channel measurement plus $n_{\text{CSI_ref}}$ slots, as defined in 5.2.2.5 in [26], and reporting after slot $(m+k)$. UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PCell in the slot.

During T2 the UE shall start sending valid L1-RSRP report for the SCell in the configured slots for CSI reporting after slot $(m+T_{\text{L1-RSRP}})$, where $T_{\text{L1-RSRP}}$ is no larger than

$$3\text{ms} + T_{\text{FirstSSB_MAX}} + 15 \cdot T_{\text{SMTC_MAX}} + 8 \cdot T_{\text{IS}} + T_{\text{L1-RSRP, measure}} + T_{\text{L1-RSRP, report}}$$

as defined in clause 8.3.2. For this test case, $T_{\text{FirstSSB_MAX}}=T_{\text{SMTC_MAX}}=T_{\text{IS}}=20\text{ms}$; $T_{\text{L1-RSRP, measure}}=160\text{ms}$ and $T_{\text{L1-RSRP, report}}=5\text{ms}$, which allows $T_{\text{L1-RSRP}}=680\text{ms}$.

During T2 the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, where

- T_{HARQ} is defined in Table A.5.5.3.1.1-2

- $T_{\text{activation_time}} = 3\text{ms} + T_{\text{FirstSSB_MAX}} + 15 \cdot T_{\text{SMTC_MAX}} + 8 \cdot T_{\text{IS}} + T_{\text{L1-RSRP, measure}} + T_{\text{L1-RSRP, report}} + \max \{ (T_{\text{HARQ}} + T_{\text{uncertainty_MAC}} + 5\text{ms} + T_{\text{FineTiming}}), (T_{\text{uncertainty_RRC}} + T_{\text{RRC_delay}}) \}$, which allows 710 ms

- $T_{\text{CSI_Reporting}} = 10\text{ms}$

- NR slot length is 0.125ms for this test case.

During T3 the UE shall stop sending CSI reports for both SCells no later than slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

During T2 interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{NR slot length}}$, as defined in clause 8.3, where $T_X = 20\text{ms}$.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

The interruption of PCell due to activation of SCell shall not be more than the values specified for SA in Clause 8.2.2.7.

A.7.5.3.3 SCell Activation and deactivation for SCell in FR2 inter-band in non-DRX

A.7.5.3.3.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.7.5.3.1.1 except the PCell and SCell are in FR2 inter-band.

The supported test configurations are shown in table A.7.5.3.3.1-1 below. The general test parameters are described in Tables A.7.5.3.3.1-2, and cell specific test parameters are described in Tables A.7.5.3.3.1-3. OTA related test parameters are shown in table A.7.5.3.3.1-4 below.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on NR. During T1 the SCell is powered off and UE is not aware of SCell. A MAC message for activation of SCell is sent by the test equipment 100ms after the RRC message, in a slot # denoted m.

The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2. Immediately at beginning of T2 the transmission power of Cell 2 is increased to same level as for PCell. During T2, the test equipment monitors the L1-RSRP measurement reporting for the SCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m + T_{\text{L1-RSRP}}$. In the next DL slot after slot $m + T_{\text{L1-RSRP}}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for SCell is discontinued.

Table A.7.5.3.3.1-1: Supported test configurations for FR2 SCell activation in FR2 inter-band

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Table A.7.5.3.3.1-2: General test parameters for FR2 SCell activation in FR2 inter-band

Parameter	Unit	Value	Comment
-----------	------	-------	---------

RF Channel Number		1,2	Two NR radio channels are used for this test. RF channel number 1 is in band 1 and RF channel number 2 is in band 2, where bands 1 and 2 are inter-band CA operating bands in FR2 as specified in Table 5.2A.2-1 in TS38.101-2.
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μ s	≤ 8	A random value from 0 μ s to 8 μ s
T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	2	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T _{HARQ}	ms	$k_1 \times \text{NR slot length}$	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
T _{CSI_Reporting}	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.7.5.3.3.1-3: Cell specific test parameters for FR2 SCell activation in FR2 inter-band

Parameter ^{Note 5}	Unit	T1		T2		T3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
Downlink initial BWP Configuration		DLBWP.0.1		DLBWP.0.1		DLBWP.0.1	
Downlink dedicated BWP Configuration		DLBWP.1.1		DLBWP.1.1		DLBWP.1.1	
Uplink initial BWP configuration		ULBWP.0.1		ULBWP.0.1		ULBWP.0.1	
Uplink dedicated BWP configuration		ULBWP.1.1		ULBWP.1.1		ULBWP.1.1	
TRS configuration		TRS.2.1 TDD		TRS.2.1 TDD		TRS.2.1 TDD	
TCI state		TCI.State.0		TCI.State.0		TCI.State.0	
BW _{channel}	MHz	100: N _{RB,C} = 66		100: N _{RB,C} = 66		100: N _{RB,C} = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Parameters		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Parameters		CCR.3.1 TDD	-	CCR.3.1 TDD	-	CCR.3.1 TDD	-
CSI-RS configuration		NA	NA	NA	CSI-RS.3.1 TDD Note 2	NA	CSI-RS.3.1 TDD
CSI reporting periodicity ^{Note 3}		NA	5	NA	5	NA	5

OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTc Configuration		SMTc.1
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH_DMRS to SSS		
EPRE ratio of PBCH to PBCH_DMRS		
EPRE ratio of PDCCH_DMRS to SSS		
EPRE ratio of PDCCH to PDCCH_DMRS		
EPRE ratio of PDSCH_DMRS to SSS		
EPRE ratio of PDSCH to PDSCH_DMRS		
EPRE ratio of OCNG DMRS to SSS ^{Note 1}		
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}		
Propagation conditions		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot $m+T_{L1-RSRP}$ during T2.		
Note 3: L1-RSRP measurement and reporting are configured to the UE prior to the start of time period T1.		

Table A.7.5.3.3.1-4: OTA related test parameters for FR2 SCell activation in FR2 inter-band

Parameter ^{Note 6}	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 as specified in clause A.3.15					
Assumption for UE beams ^{Note 7}		AoA1			AoA2		
		Rough			Rough		
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-92.1			-92.1		
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-83.1			-83.1		
$\hat{E}_s / N_{oc}$	dB	0			0		
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-83.1			-83.1		
$\hat{E}_s / I_{ot}$	dB	0			0		
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-51.1			-51.1		
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 2:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone						
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone						
Note 6:	All parameters apply for configuration 1						
Note 7:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.						

A.7.5.3.3.2 Test Requirements

During T2 the UE shall start sending CSI report for the SCell in the configured slots for CSI reporting after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $(m+k)$. UE shall send the first CSI report for SCell after receiving at least one CSI-RS transmission occasion for channel measurement and reporting after slot $(m+k)$, or in the next available uplink resource for CSI reporting if the slot was subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PCell in the slot.

During T2, the UE shall start sending valid L1-RSRP report for the SCell in the configured slots for CSI reporting after slot $(m+T_{L1-RSRP})$, where $T_{L1-RSRP}$ is no larger than $3ms + T_{FirstSSB_MAX} + 15 \cdot T_{SMTc_MAX} + 8 \cdot T_{Ts} + T_{L1-RSRP, measure}$

+ $T_{L1-RSRP, \text{report}}$ as defined in clause 8.3.2. For this test case, $T_{\text{FirstSSB_MAX}}=T_{\text{SMTc_MAX}}=T_{\text{IS}}=20\text{ms}$; $T_{L1-RSRP, \text{measure}}=480\text{ms}$ and $T_{L1-RSRP, \text{report}}=5\text{ms}$, which allows $T_{L1-RSRP}=1000\text{ms}$.

During T2, the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$, where

- T_{HARQ} is defined in Table A.7.5.3.3.1-2
- $T_{\text{activation_time}} = 3\text{ms} + T_{\text{FirstSSB_MAX}} + 15 \cdot T_{\text{SMTc_MAX}} + 8 \cdot T_{\text{IS}} + T_{L1-RSRP, \text{measure}} + T_{L1-RSRP, \text{report}} + \max\{(T_{\text{HARQ}} + T_{\text{uncertainty_MAC}} + 5\text{ms} + T_{\text{FineTiming}}), (T_{\text{uncertainty_RRC}} + T_{\text{RRC_delay}})\}$, which allows 1030ms
- $T_{\text{CSI_Reporting}} = 10\text{ms}$
- NR slot length is 0.125ms for this test case.

During T2, the interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}}$, where $T_{\text{X}}=20\text{ms}$.

During T3, the UE shall stop sending CSI reports for SCell no later than slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

During T3, the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ as defined in clause 8.3.

A.7.5.3.4 Direct SCell activation at SCell addition of known SCell in FR2

A.7.5.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the delay and interruption for direct SCell activation delay at SCell addition are within the requirements stated in clause 8.3.4.

The supported test configurations are shown in Table A.7.5.3.4.1-1 below. The general test parameters are given in Table A.7.5.3.4.1-2 and cell-specific test parameters in Table A.7.5.3.4.1-3. OTA related test parameters are shown in Table A.7.5.3.4.1-4.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two FR2 carriers and two NR cells. Before the test starts the UE is connected to Cell 1 (PCell) on carrier #1, but is not aware of Cell 2 on NR carrier #2. Cell 1 and Cell 2 have constant signal levels throughout the test. The UE is monitoring the PCell. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the Cell 2 is monitored by the UE. During T1, Cell 2 should be detected and measured by the UE such that it meets the condition for known cell defined in clause 8.3.4 for direct SCell activation.

Time period T2 starts when the *RRCReconfiguration* message for the configuration and activation of Cell 2 (the SCell), which is sent from the test equipment, is received at the UE antenna connector in a slot # denoted m. The test equipment shall set the parameter *sCellState* to *activated* for the SCell, which causes Cell 2 to become configured and activated.

Time period T3 starts at $(m + N_{\text{direct}})$, at which point UE shall be reporting a valid CQI for both PCell and SCell.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during the activation of SCell. The test equipment verifies the activation time by counting

the slots from the time when the SCell activation message is sent until a CQI report with other than CQI index 0 is received.

Table A.7.5.3.4.1-1: Supported test configurations

Configuration	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.3.4.1-2: General test parameters

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels (1,2) in FR2 are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured and activated SCell		Cell 2	Configured and activated SCell on NR RF channel number 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
SCell measurement cycle (measCycleSCell)	ms	160	
T1	s	7	During this time the measurement for Cell 2 is configured, and Cell 2 is detected.
T2	s	N_{direct}	During this time the UE shall configure and activate Cell 2 as SCell.
T3	ms	100	During this time the UE shall report valid CQI for both PCell and SCell.
A3-offset	dB	-15	
T_{HARQ}	ms	$k_1 \times \text{NR slot length}$	k_1 is a number of slots indicated by the PDSCH-to-HARQ_feedback timing indicator field in a corresponding DCI format or provided by <i>dl-DataToUL-ACK</i> if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
k	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe}, \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.7.5.3.4.1-3: Cell specific test parameters

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2		
Duplex mode	Config 1		TDD					
TDD configuration	Config 1		TDDConf.3.1					
BW _{channel}	Config 1	MHz	100: N _{RB,c} = 66					
DL initial BWP configuration	Config 1		DLBWP.0.1					
DL dedicated BWP configuration	Config 1		DLBWP.1.1					
UL initial BWP configuration	Config 1		ULBWP.0.1					
UL dedicated BWP configuration	Config 1		ULBWP.1.1					
Timing offset to Cell 1		ms	Not Applicable			0		
PDSCH Reference measurement channel	Config 1		SR.3.1 TDD			SR.3.1 TDD		

RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	CR.3.1 TDD
RMC CORESET Reference Channel	Config 1		CCR.3.1 TDD	CCR.3.1 TDD
TRS configuration	Config 1		TRS.2.1 TDD	TRS.2.1 TDD
CSI-RS configuration	Config 1		CSI-RS.3.1 TDD	CSI-RS.3.1 TDD
CSI reporting periodicity	Config 1	ms	5	5
OCNG Patterns			OP.1	
SMTC configuration			SMTC.1	
SSB configuration	Config 1		SSB.1 FR2	SSB.1 FR2
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition		-	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.7.5.3.4.1-4: OTA related test parameters

Parameter ^{Note 6}	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.3.15.1					
Assumption for UE beams ^{Note 7}		Rough			Rough		
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-112			-112		
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-102.97			-102.97		
$\hat{E}_s / N_{oc}$	dB	14			14		
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-88.97			-88.97		
$\hat{E}_s / I_{ot}$	dB	14			14		
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-59.81			-59.81		

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	All parameters apply for configuration 1
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.5.3.4.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot $(m+k)$. UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PCell in the slot.

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{N_{direct}}{NR \text{ slot length}}$, where

$$N_{direct} = T_{RRC_Process} + T_1 + T_{activation_time} + T_{CSI_Reporting} - 3ms,$$

- $T_{RRC_Process} = 16ms$, which is the RRC procedure delay defined for SCell addition in clause 12 of TS 38.331 [2],
- T_1 is the delay from slot $m + T_{RRC_Process}$ until the transmission of *RRCReconfigurationComplete* message,
- $T_{activation_time} = T_{FirstSSB} + 5ms = 25ms$,
- $T_{CSI_Reporting} = 10ms$

This gives a total of $N_{direct} = 16 + T_1 + 25 + 10 - 3 = (48 + T_1)$ ms, and NR slot length is 0.125ms.

During T3 the UE shall send CSI reports for SCell with non-zero CQI index and continue to send CSI reports for SCell with non-zero CQI index until the end of T3.

During T2 interruption of PCell during SCell activation shall not happen outside the window from slot $m+1$ to slot $m+1 + \frac{T_{RRC_Process} + T_1 + T_X}{NR \text{ slot length}}$ as defined in clause 8.3.4, where $T_X = 20ms$.

The interruption of PCell due to activation of SCell shall not be more than the values specified for NR SA in clause 8.2.2.2.11.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $m + \frac{N_{direct}}{NR \text{ slot length}}$ as defined in clause 8.3.4 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.7.5.3.5 Direct SCell activation at handover with known SCell in FR2

A.7.5.3.5.1 Test Purpose and Environment

This test is to verify the requirements specified in sub clause 8.3.5 for the FR2 intra-frequency handover with direct SCell activation.

The test scenario comprises of three FR2 cells, one source PCell (Cell 1), one target PCell (Cell 2) and one SCell (Cell 3). The test consists of three successive time periods, with time durations of T1, T2, and T3 respectively.

At the start of time duration T1, the UE is in connected mode with PCell (Cell 1). Both Cell 2 and Cell 3 are known to UE and UE is reporting CQI for all Cell 1.

Time period T2 starts when UE receives a handover command that initiate handover of UE to Cell2 and also activates Cell 3. This is done using an *RRCConnectionReconfiguration* message with parameter *sCellState* set to *activated* for the Cell 3. The message is sent from the test equipment to the UE and is received in a slot number *n* at the UE antenna connector. The UE shall accomplish the handover, addition and activation of the SCell no later than slot $(n + \frac{N_{direct}}{NR\ slot\ length})$.

Time period T3 starts at $(n + \frac{N_{direct}}{NR\ slot\ length})$, at which point UE shall be reporting a valid CSI for both Cell 2 and Cell 3 as given in tables A.7.5.3.5.1-1 and A.7.5.3.5.1-2.

Table A.7.5.3.5.1-1: Supported test configurations for FR2 handover with direct SCell activation case

Configuration	Description
1	SCell: NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.3.5.1-2: General test parameters for FR2 handover with direct SCell activation case

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two NR radio channels are used for this test, Cell 1 and Cell2 use RF channel 1 and Cell 3 use RF channel 2 respectively.
A4-Offset		dBm	-15	
Time offset between cells			3 μ s	Synchronous cells
Initial conditions	Source cell		Cell 1	Source Cell
	Target cell		Cell 2	Neighbour cell
	SCell		Cell 3	SCell is not added and activated
Final condition	Source cell		Cell 2	Cell 2 is Source cell after handover
	Neighbour cell		Cell 1	Neighbour cell
	SCell		Cell 3	SCell is added and activated

Table A.7.5.3.5.1-3: Cell specific test parameters for FR2 SCell activation case

Parameter ^{Note 5}	Unit	T1			T2			T3		
		Cell 1	Cell 2	Cell 3	Cell 1	Cell 2	Cell 3	Cell 1	Cell 2	Cell 3
SSB ARFCN		freq1	freq1	freq 2	freq1	freq1	freq 2	freq1	freq1	freq2
Duplex mode		TDD			TDD			TDD		
TDD configuration		TDDConf.3.1			TDDConf.3.1			TDDConf.3.1		
Downlink initial BWP Configuration		DLBWP.0.1			DLBWP.0.1			DLBWP.0.1		
Downlink dedicated BWP Configuration		DLBWP.1.1			DLBWP.1.1			DLBWP.1.1		
Uplink initial BWP configuration		ULBWP.0.1			ULBWP.0.1			ULBWP.0.1		
Uplink dedicated BWP configuration		ULBWP.1.1			ULBWP.1.1			ULBWP.1.1		

TRS configuration		TRS.2.1 TDD		TRS.2.1 TDD		TRS.2.1 TDD	
TCI state		TCI.State.0		TCI.State.0		TCI.State.0	
BW _{channel}	MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66		100: N _{RB,c} = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	
RMSI CORESET Parameters		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	
Dedicated CORESET Parameters		CCR.3.1 TDD	-	CCR.3.1 TDD	-	CCR.3.1 TDD	
OCNG Patterns		OP.1					
SSB Configuration		SSB.1 FR2					
SMTC Configuration		SMTC.1					
PRACH configuration		FR2 PRACH configuration 1					
CSI-RS configuration for CSI reporting		CSI-RS.3.1 TDD					
reportConfigType		periodic	-	periodic	-	periodic	-
reportQuantity		cri-RI-PMI-CQI	-	cri-RI-PMI-CQI	-	cri-RI-PMI-CQI	-
CSI reporting periodicity	slot	40	-	40	-	40	-
CSI reporting offset	slot	4	-	4	-	4	-
EPRE ratio of PSS to SSS	dB	0					
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG DMRS to SSS ^{Note 1}							
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}							
Propagation conditions		AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5:	Void						

Table A.7.5.3.5.1-4: OTA related test parameters for FR2 SCell activation case

Parameter ^{Note 6}	Unit	Cell 1			Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to table A.3.15.1			Setup 1 according to table A.3.15.1			Setup 1 according to table A.3.15.1		
Assumption for UE beams ^{Note 7}		Rough			Rough			Rough		
N_{oc} ^{Note 1}	dBm/15kHz ^{Note 4}	-112			-112			-112		
N_{oc} ^{Note 1}	dBm/SCS ₃ ^{Note 3}	-102.97			-102.97			-102.97		

$\hat{E}_s / N_{oc}$	dB	14	14	14
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-88.97	-88.97	-88.97
$\hat{E}_s / I_{ot}$	dB	14	14	14
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-56.89	-56.89	-59.81
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone Note 6: Void Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				

A.7.5.3.5.2 Test Requirements

The UE shall be capable to transmit valid CSI report for PCell (Cell 2) and to the directly activated SCell1 no later than in slot $n + N_{direct}$.

The SCell activation delay, N_{direct} , can be expressed as: $N_{direct} = T_{RRC_process} + T_{interrupt} + T_2 + T_3 + T_{activation_time} + T_{CSI_Reporting} - 3ms$; Where:

- $T_{RRC_Process}$: RRC procedure delay defined in clause 12 of TS 38.331 and it is equal to 16ms,
- $T_{interrupt}$: Interruption time during handover as specified in clause 6.1.1. The value to be verified in the test is 52 ms ($T_{interrupt} = 0$ ms for $T_{search} + 10ms$ for $T_{IU} + 20$ ms for $T_{processing} + 20ms$ for $T_{\Delta} + 2$ ms for T_{margin} ms) by assuming known SCell and SMTC.1 configuration.
- T_2 : Delay from slot $n + \frac{T_{RRC_Process} + T_{interrupt}}{NR\ slot\ length}$ until UE has obtained a valid TA command for the target PCell,
- T_3 : Delay for applying the received TA for uplink transmission in the target PCell, and greater than or equal to $k+1$ slot, where k is defined in clause 4.2 in TS 38.213,
- $T_{activation_time}$ and $T_{CSI_Reporting}$ are specified in clause 8.3.2, where the following definitions of $T_{FirstSSB}$ and $T_{FirstSSB_MAX}$ as defined in section 8.3.5 shall apply:

During time period T_2 of the test, the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{SMTC_SCell} + 5ms$, as defined in clause 8.3.

During time period T_3 of the test, the UE shall stop sending CSI reports for SCell at latest in a slot $m + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During time period T_2 of the test, interruption of PCell / PSCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ} + 3ms + T_X}{NR\ slot\ length} + N_{interruption}$, as defined in clause 8.3.

During time period T_3 of the test, the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $m + 1 + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

The interruption on any activated serving cell shall not be more than the values specified for SA in clause 8.2.2.2.2.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During time period T2 of the test, if there are no uplink resources for reporting the valid CSI in a slot $n + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{\text{NR slot length}}$ as defined in clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.7.5.3.6 PUCCH SCell activation and deactivation for FR1+FR2 inter-band with target SCell in FR2 and known

A.7.5.3.6.1 Test Purpose and Environment

The purpose of this test is to verify that the PUCCH SCell activation and deactivation times are within the requirements stated in clause 8.3.12 and 8.3.14, when the PUCCH SCell in FR2 is known by the UE at the time of activation.

The supported test configurations are shown in table A.7.5.3.6.1-1 below. The test parameters are given in Tables A.7.5.3.6.1-2 and cell-specific parameters in A.7.5.3.6.1-3 below. The test consists of four successive time periods, with duration of T1, T2 T3, and T4 respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 but is not aware of Cell2. The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. The test equipment sends a MAC message for activation of the PUCCH SCell.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n, defines the start of time period T2. The UE shall be able to report valid CSI for the activated PUCCH SCell at latest in slot $n + \frac{T_{\text{HARQ}} + T_{\text{delay_multiple_SCells_PUCCH_SCell}}}{\text{NR slot length}}$, and report valid CSI for the activated DL SCell at latest in slot $n + \frac{T_{\text{HARQ}} + T_{\text{delay_multiple_SCells_other_SCell}}}{\text{NR slot length}}$, as defined in clause 8.3.13. In this test case, both valid TA and invalid TA cases shall be tested.

Test for case when UE has valid TA: the *TimeAlignmentTimer* [2] associated with the TAG containing the PUCCH SCell is running, and $T_{\text{delay_multiple_SCells_PUCCH_SCell}} = T_{\text{activation_time_multiple_scells}} + [X] * T_{\text{target_PL_RS}} + T_{\text{CSI_Reporting}}$.

Test for case when UE do not have valid TA: $T_{\text{delay_multiple_SCells_PUCCH_SCell}} = T_{\text{activation_time_multiple_scells}} + \max((T_{\text{First_available_CSI}} + T_{\text{CSI_processing}}), [X] * T_{\text{target_PL_RS}}, (T1+T2+T3)) + T_{\text{CSI_reporting_after}}$

$T_{\text{activation_time_multiple_scells}}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario as specified in section 8.3.7

Any PCell interruption due to activation of PUCCH SCell shall occur in the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_x}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2

Time period T3 starts when a MAC message for deactivation of PUCCH SCell and DL SCell, sent from the test equipment to the UE in a slot # denoted m, is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot $m + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.14 and the starting point of any PCell interruption due to the deactivation shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.14.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of PUCCH SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for SCell is discontinued.

Table A.7.5.3.6.1-1: Supported test configurations for FR2 SCell activation case

Configuration	Description
1	PCell: 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	PCell: 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.7.5.3.6.1-2: Cell specific test parameters for FR2 SCell activation case

Parameter ^{Note 5}		Unit	Cell 1				Cell 2			
			T1	T2	T3	T4	T1	T2	T3	T4
SSB ARFCN			Freq1				Freq2			
Duplex mode	Config 1		FDD				TDD			
	Config 2,3		TDD							
TDD configuration	Config 1		Not Applicable				TDDConf.3.1			
	Config 2		TDDConf.1.1							
	Config 3		TDDConf.2.1							
Downlink initial BWP Configuration	Config 1,2,3		DLBWP.0.1							
Downlink dedicated BWP Configuration	Config 1,2,3		DLBWP.1.1							
Uplink initial BWP configuration	Config 1,2,3		ULBWP.0.1							
Uplink dedicated BWP configuration	Config 1,2,3		ULBWP.1.1							
TRS configuration	Config 1,2,3		N/A				TRS.2.1 TDD			
TCI state	Config 1,2,3		TCI.State.0							
BW _{channel}	Config 1,2	MHz	10: N _{RB,c} = 52				100: N _{RB,c} = 66			
	Config 3		40: N _{RB,c} = 106							
Data RBs allocated	Config 1,2		52	66	52	66	52	66		
	Config 3		106		106		106			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD				-			
	Config 2		SR.1.1 TDD							
	Config 3		SR.2.1 TDD							
RMSI CORESET Parameters	Config 1		CR.1.1 FDD				-			
	Config 2		CR.1.1 TDD							
	Config 3		CR.2.1 TDD							
Dedicated CORESET Parameters	Config 1		CCR.1.1 FDD				-			
	Config 2		CCR.1.1 TDD							
	Config 3		CCR.2.1 TDD							
OCNG Patterns			OP.1							
SSB configuration	Config 1,2		SSB.1 FR1				SSB.3 FR2			
	Config 3		SSB.2 FR1							
CSI-RS configuration for CSI reporting	Config 3		N/A				CSI-RS.3.1 TDD			

reportConfigType for CSI reporting				periodic
reportQuantity for CSI reporting				cri-RI-PMI-CQI
CSI reporting periodicity	Config 3	slot		40
CSI reporting offset	Config 3	slot		8
SMTC configuration			SMTC.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Propagation conditions			N/A Link only, see clause A.3.7A	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void Note 5: All parameters apply for configuration 1, 2 and 3				

Table A.7.5.3.6.1-3: OTA related test parameters for FR2 SCell with FR1 PCell

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Angle of arrival configuration			N/A			According to clause A.3.15.1		
Assumption for UE beams ^{Note 7}			N/A			Rough		
N_{oc} ^{Note 1}	Config 1,2,3	dBm/15kHz	Link only, see clause A.3.7A			-104.7		
N_{oc} ^{Note 1}	Config 1,2,3	dBm/SCS				-95.7		
$\hat{E}_s / N_{oc}$	Config 1,2,3	dB				$-\infty$	7	7
E_s / N_{oc}	Config 1,2,3	dB				$-\infty$	7	7
SSB_RP ^{Note 2, Note 4}	Config 1,2,3	dBm/SCS				$-\infty$	-88.7	-88.7
I_o ^{Note 2, Note 4}	Config 1,2,3	dBm/95.04 MHz				-66.68	-58.92	-58.92
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 2: E_s/I_o , SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 3: Void								
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone								
Note 5: Void								
Note 6: Void								

Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.3.6.2 Test Requirements

By end of T2 the UE shall finish the DL activation for the PUCCH SCell. Assuming the periodic CSI reporting is used and assuming periodic CSI activation and TCI state is sent along with SCell activation MAC CE, UE shall finish the DL activation by slot $n + 10\text{ms} + T_{\text{HARQ}} + T_{\text{FineTiming}}$

With SSB periodicity of 20ms, UE shall complete DL activation of PUCCH SCell within 30ms after transmitting HARQ message for SCell activation command.

During T2 the UE shall start sending PRACH preamble to TE and shall obtain the TA command from TA and shall be ready to send valid CSI report to the TE. CSI report shall be transmitted within $30\text{ms} + [X=0] + \max((T_{\text{First_available_CSI}} + T_{\text{CSI_processing}}), (T1+T2+T3)) + T_{\text{CSI_reporting_after}}$ from the transmission of HARQ feedback of SCell activation command as specified in the 8.3.12.

During T3 the UE shall stop sending CSI reports for both SCells no later than slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

During T2 interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{NR slot length}}$, as defined in clause 8.3, where $T_X = 20\text{ms}$.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.

The interruption of PCell due to activation of SCell shall not be more than the values specified for SA in Clause 8.2.2.2.7.

A.7.5.3.7 PUCCH SCell activation and deactivation delay requirements of FR2 unknown cell with FR1 PCell

A.7.5.3.7.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.7.5.3.7.1 except the PUCCH SCell in FR2 is unknown.

The supported test configurations and the general test parameters are defined in Table A.7.5.3.7.1-1 and Table A.7.5.3.7.1-2, respectively. And cell specific test parameters are described in Tables A.7.5.3.7.1-3. OTA related test parameters are defined in Table A.7.5.3.7.1-4. In all test cases, two cells are used. Cell 1 is the FR1 PCell in the primary Timing Advance Group (pTAG) and cell 2 is the FR2 PUCCH SCell in the secondary Timing Advance Group (sTAG).

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on NR. During T1 the SCell is powered off and UE is not aware of SCell.

A MAC message for activation of SCell is sent by the test equipment T1 after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2. At the time of T2, the UE does not have a valid TA for the SCell in sTAG. Immediately at the beginning of T2 the transmission power of Cell 2 is increased to same level as for cell 2

During T2, the test equipment monitors the L1-RSRP measurement result for the SCell reported on the PCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m + T_{\text{L1-RSRP}}$. In the next DL slot after slot

$m + T_{L1-RSRP}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCell and PUCCH-SpatialRelation of the SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell. $T_{HARQ} + T_{activation_time}$ after slot m , the UE shall be able to monitor PDCCH on the SCell that triggers PDCCH order-based contention-free PRACH. The test equipment receives the PRACH and sends random access response with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value estimated from the PRACH. The UE shall start reporting CSI of the SCell with non-zero CQI index via PUCCH on the SCell no later than slot $m + (T_{HARQ} + T_{delay_PUCCH_SCell})/NR$ slot length. Here, $T_{activation_time}$ is the SCell activation delay defined in 8.3.2 for FR2 unknown SCell with periodic CSI-RS used for CSI reporting, and $T_{delay_PUCCH_SCell}$ is the PUCCH SCell activation delay defined in 8.3.12 for an invalid TA scenario.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n , is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during the activation of the SCell.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting on the SCell is discontinued.

Table A.7.5.3.7.11: Supported test configurations for FR2 SCell activation case

Configuration	Description
1	PCell: 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	PCell: 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.7.5.3.7.1-2: General test parameters for unknown FR2 PUCCH SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channel (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated PUCCH SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μ s	≤ 25	A random value from 0 μ s to 25 μ s
T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	2	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.

T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	$k_1 \times \text{NR slot length}$ k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.
$T_{\text{CSI_Reporting}}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2] and TS 38.213 [3].

Table A.7.5.3.7.1-3: Cell specific test parameters for FR2 PUCCH SCell activation case

Parameter ^{Note 5}		Unit	Cell 1			Cell 2		
			T1	T2			T1	T2
SSB ARFCN			Freq1			Freq2		
Duplex mode	Config 1		FDD			TDD		
	Config 2,3		TDD					
TDD configuration	Config 1		Not Applicable			TDDConf.3.1		
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
Downlink initial BWP Configuration	Config 1,2,3		DLBWP.0.1					
Downlink dedicated BWP Configuration	Config 1,2,3		DLBWP.1.1					
Uplink initial BWP configuration	Config 1,2,3		ULBWP.0.1					
Uplink dedicated BWP configuration	Config 1,2,3		ULBWP.1.1					
TRS configuration	Config 1,2,3		N/A			TRS.2.1 TDD		
TCI state	Config 1,2,3		TCI.State.0					
PUCCH Spatial Relation	Config 1,2,3		N/A			PUCCH.SRI.0		
BW _{channel}	Config 1,2	MHz	10: N _{RB,c} = 52			100: N _{RB,c} = 66		
	Config 3		40: N _{RB,c} = 106					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			SR.3.1 TDD		
	Config 2		SR.1.1 TDD					
	Config 3		SR.2.1 TDD					
RMSI CORESET Parameters	Config 1		CR.1.1 FDD			-		
	Config 2		CR.1.1 TDD					
	Config 3		CR.2.1 TDD					
Dedicated CORESET Parameters	Config 1		CCR.1.1 FDD			CCR.3.1 TDD		
	Config 2		CCR.1.1 TDD					
	Config 3		CCR.2.1 TDD					
OCNG Patterns			OP.1					
SSB configuration	Config 1,2		SSB.1 FR1			SSB.3 FR2		
	Config 3		SSB.2 FR1					
CSI-RS configuration for CSI reporting	Config 1,2,3		N/A			N/A	CSI-RS.3.1 TDD Note 6	CSI-RS.3.1 TDD

TimeAlignmentTimer for pTAG	Config 1,2,3		ms500	N/A
TimeAlignmentTimer for sTAG	Config 1,2,3		N/A	ms500
reportConfigType for CSI reporting			-	Periodic
reportConfigType for L1-RSRP			periodic	-
reportQuantity for CSI reporting			-	cri-RI-PMI-CQI
reportQuantity for L1-RSRP			ssb-Index-RSRP	-
CSI reporting periodicity	Config 1,2	slot	-	40
	Config 3		-	
L1-RSRP reporting periodicity ^{Note 7}	Config 1,2	slot	5	-
	Config 3		10	
CSI reporting offset	Config 1,2	slot	-	4
	Config 3		-	
L1-RSRP reporting offset	Config 1,2	slot	2	-
	Config 3		4	
SMTC configuration			SMTC.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Propagation conditions			N/A Link only, see clause A.3.7A	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Void				
Note 3: Void				
Note 4: Void				
Note 5: Void				
Note 6: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+T _{L1-RSRP} during T2.				
Note 7: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.				

Table A.7.5.3.7.1-4: OTA related test parameters for FR2 PUCCH SCell activation

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Angle of arrival configuration			N/A			According to clause A.3.15.1		
Assumption for UE beams ^{Note 7}			N/A			Rough		
N_{oc} ^{Note 1}	Config 1,2,3	dBm/15kHz	Link only, see clause A.3.7A			-104.7		
N_{oc} ^{Note 1}	Config 1,2,3	dBm/SCS				-95.7		
$\hat{E}_s / N_{oc}$	Config 1,2,3	dB				$-\infty$	7	7
$\hat{E}_s / I_{ot}$	Config 1,2,3	dB				$-\infty$	7	7

SSB_RP ^{Note 2, Note 4}	Config 1,2,3	dBm/SCS		$-\infty$	-88.7	-88.7
I _o ^{Note 2, Note 4}	Config 1,2,3	dBm/95.04 MHz		-66.68	-58.92	-58.92
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: Es/I_{ot}, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: Void Note 6: Void Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.						

A.7.5.3.7.2 Test Requirements

During T2 the UE shall start sending a valid L1-RSRP report of the SCell to the PCell in the configured slots for CSI reporting after slot $(m + T_{L1-RSRP})$, where $T_{L1-RSRP}$ is no larger than $3ms + T_{FirstSSB_MAX} + 15 * T_{SMTc_MAX} + 8 * T_{rs} + T_{L1-RSRP, measure} + T_{L1-RSRP, report}$ as defined in clause 8.3.2.

During T2 the UE shall start sending CSI reports of the SCell with non-zero CQI index via PUCCH on the SCell in the configured slots for CSI reporting no later than slot $m + \frac{T_{HARQ} + T_{delay_PUCCH_SCell}}{NR\ slot\ length}$ as defined in clause 8.3.12.

During T3 the UE shall stop sending CSI reports on the SCell no later than slot $n + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.14.

During T2 interruption of PCell during the SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $m + 1 + \frac{T_{HARQ} + 3ms + T_X}{NR\ slot\ length}$, as defined in clause 8.3, where $T_X = 20ms$. If the UE is not capable of parallelTxPRACH-SRS-PUCCH-PUSCH additional interruption can be allowed as defined in Clause 8.2.2.2.18.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.14.

The interruption of PCell due to activation of SCell shall not be more than the values specified for SA in Clause 8.2.2.2.18.

A.7.5.3.8 SCell Activation and deactivation for known PUCCH SCell in FR2 inter-band in non-DRX

A.7.5.3.8.1 Test Purpose and Environment

The purpose of this test is to verify that the SCell activation and deactivation times are within the requirements specified in clause 8.3, when PUCCH for a being activated SCell is configured on the SCell. The PCell and SCell are inter-band in FR2 and the SCell is known by a UE. The test shall be performed for the cases respectively where UE has valid TA and where UE does not have valid TA for an sTAG which the SCell belongs to at the time of activation.

The supported test configurations are shown in table A.7.5.3.8.11-1 below. The general test parameters are described in Tables A.7.5.3.8.1-2, and cell specific test parameters are described in Tables A.7.5.3.8.1-3. OTA related test parameters are shown in table A.7.5.3.8.1-4 below.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two NR carriers, each with one cell. Both cells have constant signal levels throughout the test. The UE shall be continuously scheduled in the PCell (Cell 1) throughout the whole test.

Before the test starts, the UE is connected to the Cell 1 (PCell) on radio channel 1 but is not aware of Cell 2 (SCell) on radio channel 2. The PCell is in the pTAG and the SCell is in an sTAG. The UE is only monitoring the PCell.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured with PUCCH on radio channel 2. The UE now starts monitoring the Cell 2. During T1, Cell 2 should be detected and measured by the UE such that it meets the condition for known cell defined in clause 8.3.2 for SCell activation.

A MAC message for activation of SCell is sent by the test equipment in a slot # denoted m. The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2.

During T2,

- When the UE has a valid TA, the UE shall be able to report valid CSI for the activated SCell no later than in slot $n + \frac{T_{HARQ} + T_{activation_time} + [X] * T_{target_PL-RS} + T_{CSI_Reporting}}{NR\ slot\ length}$, as defined in clause 8.3.12.
- When the UE does not have a valid TA, the test equipment should send a PDCCH order to the UE to initiate RA procedure on the PUCCH SCell no later than in slot $n + \frac{T_{HARQ} + T_{activation_time}}{NR\ slot\ length}$, and the UE shall be able to report valid CSI for the activated SCell no later than in slot $n + \frac{T_{HARQ} + T_{delay_PUCCH_SCell}}{NR\ slot\ length}$, as defined in clause 8.3.12.

Time period T3 starts when a MAC message for deactivation of SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot $n + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3, and the starting point of any PCell interruption due to the deactivation shall occur in the slot $m + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $m + 1 + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and the deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received from the PUCCH SCell.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting from the PUCCH SCell is discontinued.

Table A.7.5.3.8.1-1: Supported test configurations for FR2 PUCCH SCell activation in FR2 inter-band

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Table A.7.5.3.8.1-2: General test parameters for known PUCCH SCell activation in FR2 inter-band

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR radio channels are used for this test. RF channel number 1 is in band 1 and RF channel number 2 is in band 2, where bands 1 and 2 are inter-band CA operating bands in FR2 as specified in Table 5.2A.2-1 in TS38.101-2.

Active PCell		Cell1	PCell on NR RF channel number 1.
Configured PUCCH SCell		Cell2	Configured PUCCH SCell on NR RF channel number 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μs	≤8	A random value from 0μs to 8μs
Filter coefficient		0	L3 filtering is not used
T _{HARQ}	ms	k ₁ ×NR slot length	k ₁ is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
T _{CSI_Reporting}	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
T1	s	7	During this time the PUCCH SCell shall be configured and detected.
T2	s	2	During this time the UE shall activate the PUCCH SCell.
T3	s	1	During this time the UE shall deactivate the PUCCH SCell.
TimeAlignmentTimer	ms	1280	Cell 1 in pTAG.
TimeAlignmentTimerSTAG	ms	[1280]	Cell 2 in sTAG.

Table A.7.5.3.8.1-3: Cell specific test parameters for FR2 PUCCH SCell activation in FR2 inter-band

Parameter ^{Note 5}	Unit	T1		T2		T3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
Downlink initial BWP Configuration		DLBWP.0.1		DLBWP.0.1		DLBWP.0.1	
Downlink dedicated BWP Configuration		DLBWP.1.1		DLBWP.1.1		DLBWP.1.1	
Uplink initial BWP configuration		ULBWP.0.1		ULBWP.0.1		ULBWP.0.1	
Uplink dedicated BWP configuration		ULBWP.1.1		ULBWP.1.1		ULBWP.1.1	
TRS configuration		TRS.2.1 TDD		TRS.2.1 TDD		TRS.2.1 TDD	
TCI state		TCI.State.0		TCI.State.0		TCI.State.0	
Spatial Relation Configuration		PUCCH.SRI.0		PUCCH.SRI.0		PUCCH.SRI.0	
BW _{channel}	MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66		100: N _{RB,c} = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Parameters		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Parameters		CCR.3.1 TDD	-	CCR.3.1 TDD	-	CCR.3.1 TDD	-
CSI-RS configuration		NA	NA	NA	CSI-RS.3.1 TDD Note 2	NA	CSI-RS.3.1 TDD
CSI reporting periodicity ^{Note 3}		NA	5	NA	5	NA	5
PRACH configuration		-	-	-	FR2 PRAC	-	FR2 PRAC

					H configu ration 2		H configu ration 2
OCNG Patterns		OP.1					
SSB Configuration		SSB.1 FR2					
SMTC Configuration		SMTC.1					
EPRE ratio of PSS to SSS	dB	0					
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG DMRS to SSS ^{Note 1}							
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}							
Propagation conditions		AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+T _{L1-RSRP} during T2.						
Note 3:	L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.						

Table A.7.5.3.8.1-4: OTA related test parameters for FR2 SCell activation in FR2 inter-band

Parameter ^{Note 6}	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 as specified in clause A.3.15					
		AoA1			AoA2		
Assumption for UE beams ^{Note 7}		Rough			Rough		
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-92.1			-92.1		
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-83.1			-83.1		
$\hat{E}_s / N_{oc}$	dB	0			0		
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-83.1			-83.1		
$\hat{E}_s / I_{ot}$	dB	0			0		
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-51.1			-51.1		
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone							
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone							
Note 6: All parameters apply for configuration 1							
Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.							

A.7.5.3.8.2 Test Requirements

During T2, when the UE has valid TA, the UE shall start sending CSI report for the SCell with non-zero CQI index on the PUCCH SCell no later than in slot $n + \frac{T_{HARQ} + T_{activation_time} + [X] * T_{target_PL-RS} + T_{CSI_Reporting}}{NR\ slot\ length}$, where $T_{activation_time}$ is $\max(T_{uncertainty_MAC} + 5ms + T_{FineTiming}, T_{uncertainty_RRC} + T_{RRC_delay} - T_{HARQ})$ as defined in clause 8.3.2, which allows 5ms.

If the UE has a valid TA for transmitting on the SCell, during T2, the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting on PUCCH SCell no later than slot $m + \frac{T_{HARQ} + T_{activation_time} + [X] * T_{target_PL-RS} + T_{CSI_Reporting}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.4.5.3.1.1-2
- $T_{activation_time} = \max(T_{uncertainty_MAC} + 5ms + T_{FineTiming}, T_{uncertainty_RRC} + T_{RRC_delay} - T_{HARQ})$, which allows 5ms
- $T_{CSI_Reporting} = 10ms$
- NR slot length is 0.125ms for this test case.

If the UE does not have a valid TA for transmitting on the SCell, during T2, the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{T_{HARQ} + T_{delay_PUCCH_SCell}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.4.5.3.1.1-2
- $T_{delay_PUCCH_SCell} = T_{activation_time} + \max((T_{First_available_CSI} + T_{CSI_processing}), (T1+T2+T3), [X]*T_{target_PL-RS}) + T_{CSI_reporting_after}$
- FFS the value of $T1+T2+T3$ and $T_{CSI_reporting_after}$
- NR slot length is 0.125ms for this test case.

During T2 interruption of PCell / PSCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $m + 1 + \frac{T_{HARQ} + 3ms + T_X}{NR\ slot\ length} + N_{interruption}$, as defined in clause 8.3.

During T3 the UE shall stop sending CSI reports for SCell at latest in a slot $n + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

A.7.5.3.9 PUCCH SCell Activation and deactivation of unknown SCell in FR2

A.7.5.3.9.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation are done within the required time period defined in clause 8.3.12, when PUCCH for a being activated SCell is configured on the NR FR2 SCell. The PCell and SCell are in different FR2 band. The SCell is unknown by the UE and the UE does not have valid TA for a sTAG which the SCell belongs to at the time of activation. Supported test configurations are shown in table A.7.5.3.9.1-1.

The general test parameters and NR cell specific test parameters are given in Table A.7.5.3.9.1-2 and A.7.5.3.9.1-3 below. OTA related test parameters are shown in table A.7.5.3.9.1-4 below.

In the test there are two cells: Cell1 and Cell2. Cell1 is PCell, Cell2 is the PUCCH SCell being activated and deactivated. The test consists of three successive time periods with duration of T1, T2 and T3, respectively. The UE shall be continuously scheduled in Cell1 (PCell) throughout the test.

Before the test starts, the UE is connected to the PCell (Cell 1) on NR radio channel 1 (PCC), but is not aware of SCell (Cell2) on NR radio channel 2 (SCC). The PCell is in the pTAGs and the SCell is in a sTAG. The UE is only monitoring the PCC.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) gets configured with PUCCH on NR radio channel 2 (SCC). The UE now starts monitoring the SCC2 also. Test equipment sends a MAC message for activation of the SCell. The MAC message for the activation is received at the UE antenna connector at slot # denoted m, which is defined as the start of time period T2.

Immediately at beginning of T2 the transmission power of Cell 2 is increased to same level as for Cell 1. During T2, the test equipment monitors the L1-RSRP measurement reporting for the SCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m + T_{L1-RSRP}$. In the next DL slot after slot $m + T_{L1-RSRP}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell. During T2, the test equipment should send a PDCCH order to the UE to initiate RA procedure on the PUCCH SCell at slot $(m + \frac{T_{HARQ} + T_{activation_time}}{NR\ slot\ length})$ after UE report on PCell.

Time period T3 starts when a MAC message for deactivation of the PUCCH SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting for SCell is discontinued.

Table A.7.5.3.9.1-1: PUCCH SCell Activation and deactivation test configurations in FR2 inter-band

Config	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Table A.7.5.3.9.1-2: General test parameters for PUCCH SCell activation and deactivation in FR2 inter-band

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR radio channels are used for this test. RF channel number 1 is in band 1 and RF channel number 2 is in band 2, where bands 1 and 2 are inter-band CA operating bands in FR2 as specified in Table 5.2A.2-1 in TS38.101-2.
Active PCell		Cell1	PCell on NR RF channel number 1.
Configured PUCCH SCell		Cell2	Configured PUCCH SCell on NR RF channel number 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe

Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
<i>TimeAlignmentTimer</i> for sTAG	ms	5120	Set for UE has not valid TA at start of T2 based on T1 = 7s.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to Cell1	μs	≤ 8	A random value from 0μs to 8μs
Filter coefficient		0	L3 filtering is not used
T_{HARQ}	ms	$k_1 \times \text{NR slot length}$	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k_1 should be the minimum value defined in TS 38.213 [3] depends on UE's capability
$T_{\text{CSI_Reporting}}$	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]
T1	s	7	During this time the PUCCH SCell shall be configured and detected.
T2	s	2	During this time the UE shall activate the PUCCH SCell.
T3	s	1	During this time the UE shall deactivate the PUCCH SCell.

Table A.7.5.3.9.1-3: NR Cell specific test parameters for PUCCH SCell activation and deactivation in FR2 inter-band

Parameter ^{Note 5}	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
SSB ARFCN		freq1			freq2		
Duplex mode		TDD					
TDD configuration		TDDConf.3.1					
Downlink initial BWP Configuration		DLBWP.0.1					
Downlink dedicated BWP Configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
BW _{channel}	MHz	100: N _{RB,C} = 66			100: N _{RB,C} = 66		
PDSCH Reference measurement channel		SR.3.1 TDD			-		
RMSI CORESET Parameters		CR.3.1 TDD			-		
Dedicated CORESET Parameters		CCR.3.1 TDD			-		
CSI-RS configuration		NA			NA	CSI-RS.3.1 TDD Note 2	
CSI reporting periodicity ^{Note 3}		NA			NA	5	
OCNG Patterns		OP.1					
SSB Configuration		SSB.1 FR2					
SMTC Configuration		SMTC.1					
EPRE ratio of PSS to SSS	dB	0					
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG DMRS to SSS ^{Note 1}							
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}							
Propagation conditions		AWGN					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							

Note 2: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot $m+T_{L1-RSRP}$ during T2.
 Note 3: L1-RSRP measurement and reporting are configured to the UE prior to the start of time period T1.

Table A.7.5.3.9.1-4: OTA related test parameters for PUCCH SCell activation and deactivation in FR2 inter-band

Parameter ^{Note 6}	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 as specified in clause A.3.15					
Assumption for UE beams ^{Note 7}		AoA1			AoA2		
		Rough			Rough		
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-92.1			-92.1		
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-83.1			-83.1		
$\hat{E}_s / N_{oc}$	dB	0			-infinite	0	
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-83.1			-infinite	-83.1	
$\hat{E}_s / I_{ot}$	dB	0			-infinite	0	
Io ^{Note2}	dBm/ 95.04 MHz ^{Note4}	-51.1			-54.1	-51.1	
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone						
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone						
Note 6:	All parameters apply for configuration 1						
Note 7:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.						

A.7.5.3.9.2 Test Requirements

During T2, the UE shall start sending valid L1-RSRP report for the SCell in the configured slots for CSI reporting after slot $(m+T_{L1-RSRP})$, where $T_{L1-RSRP}$ is no larger than $3ms + T_{FirstSSB_MAX} + 15 \cdot T_{SMTc_MAX} + 8 \cdot T_{rs} + T_{L1-RSRP, measure} + T_{L1-RSRP, report}$ as defined in clause 8.3.12. For this test case, $T_{FirstSSB_MAX}=T_{SMTc_MAX}=T_{rs}=20ms$; $T_{L1-RSRP, measure}=480ms$ and $T_{L1-RSRP, report}=5ms$, which allows $T_{L1-RSRP}=1000ms$.

During T2, the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{T_{HARQ} + T_{delay_PUCCH_SCell}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.7.5.3.3.1-2
- $T_{delay_PUCCH_SCell} = T_{activation_time} + \max((T_{First_available_CSI} + T_{CSI_processing}), (T1+T2+T3), T_{meas}) + T_{CSI_reporting_after}$
- $T_{activation_time} = 3ms + T_{FirstSSB_MAX} + 15 \cdot T_{SMTc_MAX} + 8 \cdot T_{rs} + T_{L1-RSRP, measure} + T_{L1-RSRP, report} + \max\{(T_{HARQ} + T_{uncertainty_MAC} + 5ms + T_{FineTiming}), (T_{uncertainty_RRC} + T_{RRC_delay})\}$, which allows 1030ms
- $T_{meas} = 5 \cdot T_{rs} = 100ms$
- NR slot length is 0.125ms for this test case.

During T2, the interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{NR slot length}}$, where $T_X = 20\text{ms}$.

During T3, the UE shall stop sending CSI reports for SCell no later than slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.14.

During T3, the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ as defined in clause 8.3.14.

A.7.5.3.10 SCell Activation and deactivation of FR2 known PUCCH SCell and one FR2 unknown SCell with FR2 PCell

A.7.5.3.10.1 Test Purpose and Environment

The purpose of this test is to verify that when a PUCCH SCell and DL SCell are activated using the same MAC CE command, the PUCCH SCell, and DL SCell activation and deactivation delays are within the requirements stated in clause 8.3.13 and 8.3.15. When UE receive the MAC CE activation command, PUCCH SCell in FR2 is known to UE and DL SCell in FR2 is unknown to the UE.

The supported test configurations are provided in table A.7.5.3.10.1-1 below. The general test parameters are given in Tables A.7.5.3.10.1-2 and cell-specific test parameters are given in A.7.5.3.10.1-3. OTA related test parameters are given in A.7.5.3.10.1-4.

The test consists of two sub tests, one with valid timing advance (TA), and other with invalid TA. The test consists of six successive time periods, with duration of T1, T2, and T3 respectively. There are two NR carriers, and PCC has two cell and SCC has one cells. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 but is not aware of Cell 2 (PUCCH SCell) and Cell 3 (DL SCell). Cell1 and Cell 3 are configured on primary timing advance group (pTAG). Cell2 is on different band than Cell1 and Cell3. For valid TA case, Cell1, Cell2 and Cell 3 are on same TAG. For invalid TA case Cell 2 is on different TAG than Cell1 and Cell3. At the start of the test, the UE is monitoring PCC and not SCC.

At the beginning of T1, the UE receives an RRC message by which the PUCCH SCell (Cell 2) and DL SCell (Cell 3) becomes configured on radio channel 2 and 1 respectively. In T1, the UE starts measuring PUCCH SCell 1 and DL SCell is not detectable. During the duration of T1, the time alignment timer is running on and pTAG, and the TA is maintained on PCell. At the end of T1, the test equipment sends a MAC CE message for activation of the PUCCH SCell and DL SCell simultaneously.

The point in time at which the MAC message is received at the UE antenna connector, in slot # denoted n , defines the start of time period T2. The UE shall be able to report valid CSI for the activated PUCCH SCell at latest in slot $n1 + \frac{T_{\text{HARQ}} + T_{\text{delay_multiple_SCells_PUCCH_SCell}}}{\text{NR slot length}}$, and report valid CSI for the activated DL SCell at latest in slot $n1 + \frac{T_{\text{HARQ}} + T_{\text{delay_multiple_SCells_other_SCell}}}{\text{NR slot length}}$, as defined in clause 8.3.13. In this test case, both valid TA and invalid TA cases shall be tested.

Test for case when UE has valid TA (i.e., the *TimeAlignmentTimer* [2] associated with the TAG containing the PUCCH SCell is running), $T_{\text{delay_multiple_SCells_PUCCH_SCell}} = T_{\text{activation_time_multiple_scells}} + [X] * T_{\text{target_PL_RS}} + T_{\text{CSI_Reporting}}$.

Test for case when UE do not have valid TA: $T_{\text{delay_multiple_SCells_PUCCH_SCell}} = T_{\text{activation_time_multiple_scells}} + \max((T_{\text{First_available_CSI}} + T_{\text{CSI_processing}}), [X] * T_{\text{target_PL_RS}}, (T1 + T2 + T3)) + T_{\text{CSI_reporting_after}}$

$T_{\text{activation_time_multiple_scells}}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario as specified in section 8.3.7

In case of valid TA, for Cell2 activation, the UE shall start reporting CSI in PUCCH SCell in slot $n1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the PUCCH SCell activation has been completed.

For Cell3 activation, the UE shall start reporting CSI in PCell in slot $n1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the DL SCell activation has been completed.

Any PCell interruption due to activation of PUCCH SCell or DL SCell shall occur in the slot $n1 + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n1 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3.13, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2.2.2.7.

Time period T3 starts when a MAC message for deactivation of PUCCH SCell and DL SCell, sent from the test equipment to the UE in a slot # denoted $n2$, is received at the UE antenna connector. The UE shall carry out deactivation of the SCell in a slot $n2 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.15, and the starting point of any PCell interruption due to the deactivation shall occur in the slot $n2 + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.15.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of PUCCH SCell and DL SCell, respectively.

The test equipment verifies the PUCCH SCell activation time by counting the slots from the time when the PUCCH SCell activation command is sent until a CSI report with other than CQI index 0 is received. The test equipment verifies the DL SCell activation time by counting the slots from the time when the DL SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the PUCCH SCell deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for PUCCH SCell is discontinued. The test equipment verifies the DL SCell deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for DL SCell is discontinued.

Table A.7.5.3.10.1-1: Supported test configurations for FR2 SCell activation in FR2 inter-band

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode for PCell NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode for PUCCH SCell and DL SCell

Table A.7.5.3.10.1-2: General test parameters for FR2 SCell activation in FR2 inter-band

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels are used for this test. RF channel number 1 is in band 1 and RF channel number 2 is in band 2, where bands 1 and 2 are inter-band CA operating bands in FR2 as specified in Table 5.2A.2-1 in TS38.101-2.
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated PUCCH SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2.
Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe

Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 and Cell3 timing offset to cell1	μ s	≤ 8	A random value from 0 μ s to 8 μ s
T1	s	6	During this time the PUCCH SCell shall be known and the DL SCell configured and detected.
T2	s	2	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T4	s	6	During this time the PUCCH SCell shall be known and the DL SCell configured and detected.
T5	s	2	During this time the UE shall activate the PUCCH SCell and DL SCell.
T6	s	1	During this time the UE shall deactivate the PUCCH SCell and DL SCell.
T _{HARQ}	ms	$k_1 \times \text{NR slot length}$	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
T _{CSI_Reporting}	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.7.5.3.10.1-3: Cell specific test parameters for FR2 SCell activation in FR2 inter-band

Parameter ^{Note 5}	Unit	T1			T2			T3		
		Cell 1	Cell 2	Cell3	Cell 1	Cell 2	Cell3	Cell 1	Cell 2	Cell3
SSB ARFCN		freq1	freq2		freq1	freq2		freq1	freq2	
Duplex mode		TDD			TDD			TDD		
TDD configuration		TDDConf.3.1			TDDConf.3.1			TDDConf.3.1		
Downlink initial BWP Configuration		DLBWP.0.1			DLBWP.0.1			DLBWP.0.1		
Downlink dedicated BWP Configuration		DLBWP.1.1			DLBWP.1.1			DLBWP.1.1		
Uplink initial BWP configuration		ULBWP.0.1			ULBWP.0.1			ULBWP.0.1		
Uplink dedicated BWP configuration		ULBWP.1.1			ULBWP.1.1			ULBWP.1.1		
TRS configuration		TRS.2.1 TDD			TRS.2.1 TDD			TRS.2.1 TDD		
TCI state		TCI.State.0			TCI.State.0			TCI.State.0		
BW _{channel}	MHz	100: N _{RB,C} = 66			100: N _{RB,C} = 66			100: N _{RB,C} = 66		
PDSCH Reference measurement channel		SR.3.1 TDD	-		SR.3.1 TDD	-		SR.3.1 TDD	-	
RMSI CORESET Parameters		CR.3.1 TDD	-		CR.3.1 TDD	-		CR.3.1 TDD	-	
Dedicated CORESET Parameters		CCR.3.1 TDD	-		CCR.3.1 TDD	-		CCR.3.1 TDD	-	
CSI-RS configuration		CSI-RS.3.1 TDD	NA		CSI-RS.3.1 TDD	CSI-RS.3.1 TDD ^{Note 2}		CSI-RS.3.1 TDD	CSI-RS.3.1 TDD	
CSI reporting periodicity ^{Note 3}		NA	5		NA	5		NA	5	
OCNG Patterns		OP.1								

SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH_DMRS to SSS		
EPRE ratio of PBCH to PBCH_DMRS		
EPRE ratio of PDCCH_DMRS to SSS		
EPRE ratio of PDCCH to PDCCH_DMRS		
EPRE ratio of PDSCH_DMRS to SSS		
EPRE ratio of PDSCH to PDSCH_DMRS		
EPRE ratio of OCNG DMRS to SSS ^{Note 1}		
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}		
Propagation conditions		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot $m+T_{L1-RSRP}$ during T2.		
Note 3: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.		

Table A.7.5.3.10.1-4: OTA related test parameters for FR2 SCell activation in FR2 inter-band

Parameter ^{Note 6}	Unit	Cell 1	Cell3	Cell 2			
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 as specified in clause A.3.15					
		AoA1			AoA2		
Assumption for UE beams ^{Note 7}		Rough			Rough		
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-92.1			-92.1		
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-83.1			-83.1		
$\hat{E}_s / N_{oc}$	dB	0			-∞		
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-83.1			-83.1		
$\hat{E}_s / I_{ot}$	dB	0			0		
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-51.1			-51.1		
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 2:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone						
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone						
Note 6:	All parameters apply for configuration 1						
Note 7:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.						

A.7.5.3.10.2 Test Requirements

When UE receive SCell activation command at slot n_1 , during T2 the UE shall start sending CSI reports for SCell2 with non-zero CQI index in the configured slots for CSI reporting no later than slot $n_1 +$

$\frac{T_{HARQ} + T_{delay_multiple_SCells_PUCCH_SCell}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.5.5.3.x6.1-2

- $T_{\text{delay_multiple_SCells_PUCCH_SCell}}$ is defined in section 8.13.13.1. In this test case, both valid TA and invalid TA cases shall be tested.

- Test for case when UE has valid TA: the *TimeAlignmentTimer* [2] associated with the TAG containing the PUCCH SCell is running, and $T_{\text{delay_multiple_SCells_PUCCH_SCell}} = T_{\text{activation_time_multiple_scells}} + [X] \cdot T_{\text{target_PL_RS}} + T_{\text{CSI_Reporting}}$.

- Test for case when UE do not have valid TA: $T_{\text{delay_multiple_SCells_PUCCH_SCell}} = T_{\text{activation_time_multiple_scells}} + \max((T_{\text{First_available_CSI}} + T_{\text{CSI_processing}}), [X] \cdot T_{\text{target_PL_RS}}, (T1+T2+T3)) + T_{\text{CSI_reporting_after}}$.

- $T_{\text{activation_time_multiple_scells}}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario as specified in section 8.3.7.

- $T_{\text{CSI_Reporting}} = 10\text{ms}$

- NR slot length is 0.125ms.

During T2 the UE shall start sending CSI reports for SCell3 with non-zero CQI index in the configured slots for CSI reporting no later than slot $n1 + \frac{T_{\text{HARQ}} + T_{\text{delay_multiple_SCells_other_SCell}}}{\text{NR slot length}}$ where

- T_{HARQ} is defined in Table A.5.5.3.x6.1-2

- $T_{\text{delay_multiple_SCells_other_SCell}} = T_{\text{activation_time_multiple_scells}} + T_{\text{CSI_Reporting}}$.

- $T_{\text{activation_time_multiple_scells}}$ is the target SCell activation delay in millisecond in multiple SCell activation scenario as specified in section 8.3.7

- $T_{\text{CSI_Reporting}} = 10\text{ms}$

- NR slot length is 0.125ms.

Any PCell interruption due to activation of PUCCH SCell or DL SCell shall occur in the slot $n1 + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n1 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_x}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3.13, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2.2.2.7.

During T3, when UE receives deactivation MAC CE at $n2$ slot, the UE shall stop sending CSI reports for both PUCCH SCell and DL SCell no later than slot $n2 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3. The starting point of any PCell interruption due to the deactivation shall occur in the slot $n2 + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n2 + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.15.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $n1 + \frac{T_{\text{HARQ}} + T_{\text{delay_multiple_SCells_PUCCH_SCell}}}{\text{NR slot length}}$, as defined in clause 8.3.13 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.7.5.3.11 PUCCH SCell activation and deactivation delay requirements of FR2 unknown cell with FR2 PCell

A.7.5.3.11.1 PUCCH SCell activation with non-PUCCH SCell in a secondary PUCCH Group

A.7.5.3.11.1.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.7.5.3.11 except the PUCCH SCell in FR2 is unknown and another to-be-activated FR2 non-PUCCH SCell in parallel with the PUCCH SCell belongs to the secondary PUCCH group.

The supported test configurations and the general test parameters are defined in Table A.7.5.3.11.1.1-1 and Table A.7.5.3.11.1.1-2, respectively. And cell specific test parameters are described in Tables A.7.5.3.11.1.1-3. OTA related test parameters are defined in Table A.7.5.3.11.1.1-4. In all test cases, three cells are used. Cell 1 is the FR2 PCell, and Cell 2 and Cell 3 are SCells in a different band from Cell 1. Cell 2 is PUCCH SCell and Cell 3 is non-PUCCH SCell belonging to the secondary PUCCH group.

In the test configuration 1, the UE is configured with a single Timing Advance Group (TAG) for all cells, whereas UE is configured with a primary TAG (pTAG) for Cell 1 and a secondary TAG (sTAG) for Cell 2 and Cell 3 in the test configuration 2. The test configuration 1 and 2 are to verify the UE performance for the case where the UE has a valid TA for the PUCCH SCell and the case where the UE does not have a valid TA for the PUCCH SCell, respectively.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) become configured on NR. During T1 the SCells are powered off and UE is not aware of the SCells.

A MAC message for activation of SCells is sent by the test equipment T1 after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of SCells is received at the UE antenna connector defines the start of time period T2. Immediately at the beginning of T2 the transmission power of Cell 2 is increased to same level as for cell 2. At the time of T2, the UE has a valid TA in the test configuration 1 while the UE does not have a valid TA for the SCell in sTAG in the test configuration 2. During the test for the test configuration 1, the UE needs to be provided with a new Timing Advance Command MAC control element at least once during each time alignment timer period.

During T2, the test equipment monitors the L1-RSRP measurement result for the PUCCH SCell reported on the PCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m + T_{L1-RSRP}$. In the next DL slot after slot $m + T_{L1-RSRP}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCells and PUCCH-SpatialRelation of the PUCCH SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for the SCells.

During the test for the test configuration 1, the UE shall start reporting CSI of the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) with non-zero CQI index via PUCCH on the SCell no later than slot $m + (T_{HARQ} + T_{delay_multiple_SCells_PUCCH_SCell})/NR \text{ slot length}$ and slot $m + (T_{HARQ} + T_{delay_multiple_SCells_other_SCell})/NR \text{ slot length}$, respectively. Here, $T_{delay_multiple_SCells_PUCCH_SCell}$ and $T_{delay_multiple_SCells_other_SCell}$ are the PUCCH SCell activation delay and other SCell activation delay defined in 8.3.13 for a valid TA scenario.

During the test for the test configuration 2, $T_{HARQ} + T_{activation_time}$ after slot m, the UE shall be able to monitor PDCCH on the PUCCH SCell that triggers PDCCH order-based contention-free PRACH. The test equipment receives the PRACH and sends random access response with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value estimated from the PRACH. The UE shall start reporting CSI of the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) with non-zero CQI index via PUCCH on the SCell no later than slot $m + (T_{HARQ} + T_{delay_multiple_SCells_PUCCH_SCell})/NR \text{ slot length}$ and slot $m + (T_{HARQ} + T_{delay_multiple_SCells_other_SCell})/NR \text{ slot length}$, respectively. Here, $T_{activation_time}$ is the SCell activation delay defined in 8.3.2 for FR2 unknown SCell with periodic CSI-RS used for CSI reporting, and $T_{delay_multiple_SCells_PUCCH_SCell}$ and $T_{delay_multiple_SCells_other_SCell}$ are the PUCCH SCell activation delay and other SCell activation delay defined in 8.3.13 for an invalid TA scenario.

Time period T3 starts when a MAC message for deactivation of the SCells, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during the activation of the SCells.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting on the PUCCH SCell is discontinued.

Table A.7.5.3.11.1.1-1: Supported test configurations for FR2 SCell activation case

Configuration	Description
1	PCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target SCells: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	PCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target SCells: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note:	The UE is required to pass both of the supported test configurations. The UE will be configured with a single Timing Advance Group (TAG) in the test configuration 1 whereas two TAGs are used in the test configuration 2.

Table A.7.5.3.11.1.1-2: General test parameters for unknown FR2 PUCCH SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	Three NR radio channel (1, 2, 3) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated PUCCH SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2. The cell is in a different FR2 band from Cell 1.
Configured deactivated non-PUCCH SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3. The cell is intra-band contiguous to Cell 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μs	≤25	A random value from 0μs to 25μs
Cell3 timing offset to cell1	μs	≤25	A random value from 0μs to 25μs
Cell3 timing offset to cell2	μs	0	
T1	s	7	During this time the PCell (Cell 1) shall be known and the SCells (Cell 2 and Cell 3) configured and detected.
T2	s	2	During this time the UE shall activate the SCells.
T3	s	1	During this time the UE shall deactivate the SCells.

T_{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	$k_1 \times \text{NR slot length}$ k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.
$T_{\text{CSI_Reporting}}$	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2] and TS 38.213 [3].

Table A.7.5.3.11.1.1-3: Cell specific test parameters for FR2 PUCCH SCell activation case

Parameter		Unit	Cell 1			Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2			freq3		
Duplex mode	Config 1,2		TDD								
TDD configuration	Config 1,2		TDDConf.3.1								
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1								
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1								
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1								
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1								
TRS configuration	Config 1,2		TRS.2.1 TDD								
TCI state	Config 1,2		TCI.State.0								
PUCCH Spatial Relation	Config 1,2		PUCCH.SRI.0			PUCCH.SRI.0			N/A		
BW _{channel}	Config 1,2	MHz	100: N _{RB,c} = 66								
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD			SR.3.1 TDD			-		
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD			-			-		
Dedicated CORESET Parameters	Config 1,2		CCR.3.1 TDD			CCR.3.1 TDD			-		
TimeAlignmentTimer for pTAG	Config 1,2		ms500			N/A			N/A		
TimeAlignmentTimer for sTAG	Config 1		N/A			N/A			N/A		
	Config 2		N/A			ms500			N/A		
CSI-RS configuration for CSI reporting	Config 1,2		-			N/A	CSI-RS.3.1 TDD Note 6		N/A	CSI-RS.3.1 TDD Note 6	
SSB configuration	Config 1,2		SSB.3 FR2			N/A	SSB.3 FR2		N/A	SSB.3 FR2	
CSI reporting periodicity	Config 1,2	ms	5			5			N/A		
reportConfigType for CSI reporting	Config 1,2		-			Periodic			N/A		
reportConfigType for L1-RSRP	Config 1,2		periodic			-			N/A		

reportQuantity for CSI reporting	Config 1,2		-	cri-RI-PMI-CQI	-
reportQuantity for L1-RSRP	Config 1,2		ssb-Index-RSRP	-	N/A
CSI reporting periodicity	Config 1,2		-	40	40
L1-RSRP reporting periodicity ^{Note 7}	Config 1,2		40	-	N/A
CSI reporting offset	Config 1,2		-	4	4
L1-RSRP reporting offset	Config 1,2		4	-	N/A
OCNG Patterns			OP.1		
SMTC configuration			SMTC.1		
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
Propagation condition		-	AWGN		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	Void				
Note 3:	Void				
Note 4:	Void				
Note 5:	Void				
Note 6:	CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+T _{L1-RSRP} during T2.				
Note 7:	L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.				

Table A.7.5.3.11.1.1-4: OTA related test parameters for FR2 PUCCH SCell activation

Parameter ^{Note 6}	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.3.15.1					
Assumption for UE beams ^{Note 7}		Rough			Rough		
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-112			-112		
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-102.97			-102.97		
$\hat{E}_s/N_{oc}$	dB	$-\infty$	14	14	$-\infty$	14	14
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	$-\infty$	-88.97	-88.97	$-\infty$	-88.97	-88.97
$\hat{E}_s/I_{ot}$	dB	$-\infty$	14	14	$-\infty$	14	14
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-73.98	-59.81	-59.81	-73.98	-59.81	-59.81

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	All parameters apply for configuration 1 and 2
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.5.3.11.1.2 Test Requirements

During T2 the UE shall start sending a valid L1-RSRP report of the SCell to the PCell in the configured slots for CSI reporting after slot $(m + T_{L1-RSRP})$, where $T_{L1-RSRP}$ is no larger than $3ms + T_{FirstSSB_MAX} + 15 * T_{SMTc_MAX} + 8 * T_{TS} + T_{L1-RSRP, measure} + T_{L1-RSRP, report}$ as defined in clause 8.3.2.

During T2, if the test is based on the test configuration 1, the UE shall start sending CSI reports of the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) with non-zero CQI index via PUCCH on the SCell no later than slot $m + (T_{HARQ} + T_{delay_multiple_SCells_PUCCH_SCell})/NR \text{ slot length}$ and slot $m + (T_{HARQ} + T_{delay_multiple_SCells_other_SCell})/NR \text{ slot length}$, respectively. Here, $T_{delay_multiple_SCells_PUCCH_SCell}$ and $T_{delay_multiple_SCells_other_SCell}$ are the PUCCH SCell activation delay and other SCell activation delay defined in 8.3.13 for a valid TA scenario.

During T2, if the test is based on the test configuration 2, the UE shall start sending CSI reports of the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) with non-zero CQI index via PUCCH on the SCell (Cell 2) no later than slot $m + (T_{HARQ} + T_{delay_multiple_SCells_PUCCH_SCell})/NR \text{ slot length}$ and slot $m + (T_{HARQ} + T_{delay_multiple_SCells_other_SCell})/NR \text{ slot length}$, respectively. Here, $T_{delay_multiple_SCells_PUCCH_SCell}$ and $T_{delay_multiple_SCells_other_SCell}$ are the PUCCH SCell activation delay and other SCell activation delay defined in 8.3.13 for an invalid TA scenario.

During T3 the UE shall stop sending CSI reports on the PUCCH SCell no later than slot $n + \frac{T_{HARQ} + 3ms}{NR \text{ slot length}}$, as defined in clause 8.3.15.

During T2 interruption of PCell during the SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{NR \text{ slot length}}$ to $m + 1 + \frac{T_{HARQ} + 3ms + T_X}{NR \text{ slot length}}$, as defined in clause 8.3, where $T_X = 20ms$. If the UE is not capable of parallelTxPRACH-SRS-PUCCH-PUSCH additional interruption can be allowed as defined in Clause 8.2.2.2.18.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{NR \text{ slot length}}$ to $n + 1 + \frac{T_{HARQ} + 3ms}{NR \text{ slot length}}$, as defined in clause 8.3.15.

The interruption of PCell due to activation of SCells shall not be more than the values specified for SA in Clause 8.2.2.2.18.

A.7.5.3.11.2 PUCCH SCell activation with non-PUCCH SCell in a primary PUCCH Group

A.7.5.3.11.2.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.7.5.3.11 except the PUCCH SCell in FR2 is unknown and another to-be-activated FR2 non-PUCCH SCell in parallel with the PUCCH SCell belongs to the primary PUCCH group.

The supported test configurations and the general test parameters are defined in Table A.7.5.3.11.2.1-1 and Table A.7.5.3.11.2.1-2, respectively. And cell specific test parameters are described in Tables A.7.5.3.11.2.1-3. OTA related

test parameters are defined in Table A.7.5.3.11.2.1-4. In all test cases, three cells are used. Cell 1 and Cell 3 are FR2 PCell and FR2 non-PUCCH SCell in the same band, respectively, and Cell 2 is PUCCH SCells in a different band from Cell 1 and Cell 3. Cell 3 belongs to the primary PUCCH group.

In the test configuration 1, the UE is configured with a single Timing Advance Group (TAG) for all cells, whereas UE is configured with a primary TAG (pTAG) for Cell 1 and a secondary TAG (sTAG) for Cell 2 and Cell 3 in the test configuration 2. The test configuration 1 and 2 are to verify the UE performance for the case where the UE has a valid TA for the PUCCH SCell and the case where the UE does not have a valid TA for the PUCCH SCell, respectively.

At the beginning of T1 the UE receives an RRC message by which the PUCCH SCell (Cell) and the non-PUCCH SCell (Cell 3) become configured on NR. During T1 the SCells are powered off and UE is not aware of the SCells.

A MAC message for activation of SCells is sent by the test equipment T1 after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of SCells is received at the UE antenna connector defines the start of time period T2. Immediately at the beginning of T2 the transmission power of Cell 2 is increased to same level as for cell 2. At the time of T2, the UE has a valid TA in the test configuration 1 while the UE does not have a valid TA for the SCell in sTAG in the test configuration 2. During the test for the test configuration 1, the UE needs to be provided with a new Timing Advance Command MAC control element at least once during each time alignment timer period.

During T2, the test equipment monitors the L1-RSRP measurement result for the PUCCH SCell reported on the PCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m + T_{L1-RSRP}$. In the next DL slot after slot $m + T_{L1-RSRP}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCells and PUCCH-SpatialRelation of the PUCCH SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for the SCells.

During the test for the test configuration 1, the UE shall start reporting CSI of the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) with non-zero CQI index via PUCCH on the PUCCH SCell (Cell 2) and PCell (Cell 1), respectively, no later than slot $m + (T_{HARQ} + T_{\text{delay_multiple_SCells_PUCCH_SCell}})/\text{NR slot length}$ and slot $m + (T_{HARQ} + T_{\text{delay_multiple_SCells_other_SCell}})/\text{NR slot length}$, respectively. Here, $T_{\text{delay_multiple_SCells_PUCCH_SCell}}$ and $T_{\text{delay_multiple_SCells_other_SCell}}$ are the PUCCH SCell activation delay and other SCell activation delay defined in 8.3.13 for a valid TA scenario.

During the test for the test configuration 2, $T_{HARQ} + T_{\text{activation_time}}$ after slot m, the UE shall be able to monitor PDCCH on the PUCCH SCell that triggers PDCCH order-based contention-free PRACH. The test equipment receives the PRACH and sends random access response with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value estimated from the PRACH. The UE shall start reporting CSI of the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) with non-zero CQI index via PUCCH on the PUCCH SCell (Cell 2) and PCell (Cell 1), respectively, no later than slot $m + (T_{HARQ} + T_{\text{delay_multiple_SCells_PUCCH_SCell}})/\text{NR slot length}$ and slot $m + (T_{HARQ} + T_{\text{delay_multiple_SCells_other_SCell}})/\text{NR slot length}$, respectively. Here, $T_{\text{activation_time}}$ is the SCell activation delay defined in 8.3.2 for FR2 unknown SCell with periodic CSI-RS used for CSI reporting, and $T_{\text{delay_multiple_SCells_PUCCH_SCell}}$ and $T_{\text{delay_multiple_SCells_other_SCell}}$ are the PUCCH SCell activation delay and other SCell activation delay defined in 8.3.13 for an invalid TA scenario.

Time period T3 starts when a MAC message for deactivation of the SCells, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during the activation of the SCells.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CSI reporting on the PUCCH SCell is discontinued.

Table A.7.5.3.11.2.1-1: Supported test configurations for FR2 SCell activation case

Configuration	Description
1	PCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target SCells: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	PCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Target SCells: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note:	The UE is required to pass both of the supported test configurations. The UE will be configured with a single Timing Advance Group (TAG) in the test configuration 1 whereas two TAGs are used in the test configuration 2.

Table A.7.5.3.11.2.1-2: General test parameters for unknown FR2 PUCCH SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	Three NR radio channel (1, 2, 3) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated PUCCH SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2. The cell is in a different FR2 band from Cell 1.
Configured deactivated non-PUCCH SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3. The cell is intra-band contiguous to Cell 1.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μ s	≤ 25	A random value from 0 μ s to 25 μ s
Cell3 timing offset to cell1	μ s	≤ 25	A random value from 0 μ s to 25 μ s
Cell3 timing offset to cell2	μ s	0	
T1	s	7	During this time the PCell (Cell 1) shall be known and the SCells (Cell 2 and Cell 3) configured and detected.
T2	s	2	During this time the UE shall activate the SCells.
T3	s	1	During this time the UE shall deactivate the SCells.
T _{HARQ}	ms	Config 1: 2 Config 2: 3 Config 3: 2.5	$k_1 \times \text{NR slot length}$ k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] that will meet the timing constraints of this test case.
T _{CSI_Reporting}	ms	15	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2] and TS 38.213 [3].

Table A.7.5.3.11.2.1-3: Cell specific test parameters for FR2 PUCCH SCell activation case

Parameter		Unit	Cell 1			Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2			freq3		
Duplex mode	Config 1,2		TDD								
TDD configuration	Config 1,2		TDDConf.3.1								
Downlink initial BWP Configuration	Config 1,2		DLBWP.0.1								
Downlink dedicated BWP Configuration	Config 1,2		DLBWP.1.1								
Uplink initial BWP configuration	Config 1,2		ULBWP.0.1								
Uplink dedicated BWP configuration	Config 1,2		ULBWP.1.1								
TRS configuration	Config 1,2		TRS.2.1 TDD								
TCI state	Config 1,2		TCI.State.0								
PUCCH Spatial Relation	Config 1,2		PUCCH.SRI.0			PUCCH.SRI.0			N/A		
BW _{channel}	Config 1,2	MHz	100: N _{RB,C} = 66								
PDSCH Reference measurement channel	Config 1,2		SR.3.1 TDD			SR.3.1 TDD			-		
RMSI CORESET Reference Channel	Config 1,2		CR.3.1 TDD			-			-		
Dedicated CORESET Parameters	Config 1,2		CCR.3.1 TDD			CCR.3.1 TDD			-		
TimeAlignmentTimer for pTAG	Config 1,2		ms500			N/A			N/A		
TimeAlignmentTimer for sTAG	Config 1		N/A			N/A			N/A		
	Config 2		N/A			ms500			N/A		
CSI-RS configuration for CSI reporting	Config 1,2		-			N/A	CSI-RS.3.1 TDD Note 6		N/A	CSI-RS.3.1 TDD Note 6	
SSB configuration	Config 1,2		SSB.3 FR2			N/A	SSB.3 FR2		N/A	SSB.3 FR2	
CSI reporting periodicity	Config 1,2	ms	5			5			N/A		
reportConfigType for CSI reporting	Config 1,2		-			Periodic			N/A		
reportConfigType for L1-RSRP	Config 1,2		periodic			-			N/A		
reportQuantity for CSI reporting	Config 1,2		-			cri-RI-PMI-CQI			-		
reportQuantity for L1-RSRP	Config 1,2		ssb-Index-RSRP			-			N/A		
CSI reporting periodicity	Config 1,2		-			40			40		
L1-RSRP reporting periodicity ^{Note 7}	Config 1,2		40			-			N/A		
CSI reporting offset	Config 1,2		-			4			4		
L1-RSRP reporting offset	Config 1,2		4			-			N/A		
OCNG Patterns			OP.1								
SMTC configuration			SMTC.1								
EPRE ratio of PSS to SSS		dB	0								
EPRE ratio of PBCH DMRS to SSS											
EPRE ratio of PBCH to PBCH DMRS											
EPRE ratio of PDCCH DMRS to SSS											
EPRE ratio of PDCCH to PDCCH DMRS											
EPRE ratio of PDSCH DMRS to SSS											
EPRE ratio of PDSCH to PDSCH											
EPRE ratio of OCNG DMRS to SSS(Note 1)											
EPRE ratio of OCNG to OCNG DMRS (Note 1)											
Propagation condition		-	AWGN								

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Void
Note 3:	Void
Note 4:	Void
Note 5:	Void
Note 6:	CSI-RS for CSI measurement is (re)configured in the next DL slot after slot $m+T_{L1-RSRP}$ during T2.
Note 7:	L1-RSRP measurement and reporting are configured to the UE prior to the start of time period T1.

Table A.7.5.3.11.2.1-4: OTA related test parameters for FR2 PUCCH SCell activation

Parameter ^{Note 6}	Unit	Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3
Angle of arrival configuration		Setup 1 according to A.3.15.1					
Assumption for UE beams ^{Note 7}		Rough			Rough		
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-112			-112		
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-102.97			-102.97		
$\hat{E}_s/N_{oc}$	dB	$-\infty$	14	14	$-\infty$	14	14
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	$-\infty$	-88.97	-88.97	$-\infty$	-88.97	-88.97
$\hat{E}_s/I_{ot}$	dB	$-\infty$	14	14	$-\infty$	14	14
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-73.98	-59.81	-59.81	-73.98	-59.81	-59.81
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone Note 6: All parameters apply for configuration 1 and 2 Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation							

A.7.5.3.11.2.2 Test Requirements

During T2 the UE shall start sending a valid L1-RSRP report of the SCell to the PCell in the configured slots for CSI reporting after slot $(m+T_{L1-RSRP})$, where $T_{L1-RSRP}$ is no larger than $3ms + T_{FirstSSB_MAX} + 15 \cdot T_{SMTc_MAX} + 8 \cdot T_{rs} + T_{L1-RSRP, measure} + T_{L1-RSRP, report}$ as defined in clause 8.3.2.

During T2, if the test is based on the test configuration 1, the UE shall start sending CSI reports of the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) with non-zero CQI index via PUCCH on the PUCCH SCell (Cell 2) and PCell (Cell 1), respectively, no later than slot $m + (T_{HARQ} + T_{delay_multiple_SCells_PUCCH_SCell})/NR$ slot length and slot $m + (T_{HARQ} + T_{delay_multiple_SCells_other_SCell})/NR$ slot length, respectively. Here, $T_{delay_multiple_SCells_PUCCH_SCell}$ and $T_{delay_multiple_SCells_other_SCell}$ are the PUCCH SCell activation delay and other SCell activation delay defined in 8.3.13 for a valid TA scenario.

During T2, if the test is based on the test configuration 2, the UE shall start sending CSI reports of the PUCCH SCell (Cell 2) and the non-PUCCH SCell (Cell 3) with non-zero CQI index via PUCCH on the PUCCH SCell (Cell 2) and PCell (Cell 1), respectively, no later than slot $m + (T_{HARQ} + T_{delay_multiple_SCells_PUCCH_SCell})/NR$ slot length and slot $m + (T_{HARQ} + T_{delay_multiple_SCells_other_SCell})/NR$ slot length, respectively. Here, $T_{delay_multiple_SCells_PUCCH_SCell}$ and

$T_{\text{delay_multiple_SCells_other_SCell}}$ are the PUCCH SCell activation delay and other SCell activation delay defined in 8.3.13 for an invalid TA scenario.

During T3 the UE shall stop sending CSI reports on the PUCCH SCell no later than slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.15.

During T2 interruption of PCell during the SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_{\text{X}}}{\text{NR slot length}}$, as defined in clause 8.3, where $T_{\text{X}} = 20\text{ms}$. If the UE is not capable of parallelTxPRACH-SRS-PUCCH-PUSCH additional interruption can be allowed as defined in Clause 8.2.2.2.18.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$, as defined in clause 8.3.15.

The interruption of PCell due to activation of SCells shall not be more than the values specified for SA in Clause 8.2.2.2.18.

A.7.5.3.12 Void

A.7.5.3.13 SCell Activation for SCell in FR2 intra-band in non-DRX

A.7.5.3.13.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.5.5.3.8, PCell and SCell are in FR2 intra-band.

The supported test configurations are shown in table A.7.5.3.13.1-1 below. The general test parameters are the same as defined in Table A.5.5.3.8.1-2 except those described in Tables A.7.5.3.13.1-2, and cell specific test parameters are described in Tables A.7.5.3.13.1-3. OTA related test parameters are shown in table A.7.5.3.13.1-4 below.

Table A.7.5.3.13.1-1: Supported test configurations for FR2 SCell activation case

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Table A.7.5.3.13.1-2: General test parameters for FR2 SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels are used for this test, cell 1 and cell2 use RF channel 1 and 2, respectively.

Table A.7.5.3.13.1-3: Cell specific test parameters for FR2 SCell activation case

Parameter ^{Note 5}	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
SSB ARFCN		freq1		freq2	
Duplex mode		TDD			
TDD configuration		TDDConf.3.1			
Downlink initial BWP Configuration		DLBWP.0.1			
Downlink dedicated BWP Configuration		DLBWP.1.1			
Uplink initial BWP configuration		ULBWP.0.1			

Uplink dedicated BWP configuration		ULBWP.1.1		
TRS configuration		TRS.2.1 TDD		
TCI state		TCI.State.0		
BW _{channel}	MHz	100: N _{RB,c} = 66		
Data RBs allocated		66	66	66
PDSCH Reference measurement channel		SR.3.1 TDD	-	
RMSI CORESET Parameters		CR.3.1 TDD	-	
Dedicated CORESET Parameters		CCR.3.1 TDD	-	
OCNG Patterns		OP.1		
SSB Configuration		SSB.1 FR2		
Aperiodic CSI-RS for Scell activation		TRS.2.3 TDD		
gapBetweenBursts	Slot	N/A		
SMTC Configuration		SMTC.1		
CSI-RS configuration for CSI reporting		CSI-RS.3.1 TDD		
reportConfigType		periodic	N/A	
reportQuantity		cri-RI-PMI-CQI	N/A	
CSI reporting periodicity	slot	40	N/A	
CSI reporting offset	slot	4	N/A	
EPRE ratio of PSS to SSS	dB	0		
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Propagation conditions		AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Void				
Note 3: Void				
Note 4: Void				
Note 5: Void				

Table A.7.5.3.13.1-4: OTA related test parameters for FR2 SCell activation case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 1 according to table A.3.15.1		Setup 1 according to table A.3.15.1	
Assumption for UE beams ^{Note 7}		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-104.7		-104.7	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-95.7		-95.7	
$\hat{E}_s / N_{oc}$	dB	7		7	
SSB_RP ^{Note2}	dBm/SCS ^{Note4}	-88.7		N/A	
CSI_RP ^{Note2}	dBm/SCS ^{Note4}	N/A		-88.7	
$\hat{E}_s / I_{ot}$	dB	7		7	
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-58.92		-58.92	

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	Es/lot, SSB_RP, CSI_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	Void
Note 6:	Void
Note 7:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.3.13.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $(n + 1 + \frac{T_{HARQ} + 3ms}{NR \text{ slot length}})$. UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{NR \text{ slot length}}$, $T_{activation_time} = T_{FirstATRS} + 5ms$, as defined in TS 38.133 [6] clause 8.3.16.

During T2 interruption of PCell / PSCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{NR \text{ slot length}}$ to $n + 1 + \frac{T_{HARQ} + 3ms + T_X}{NR \text{ slot length}} + N_{interruption}$, as defined in TS 38.133 [6] clause 8.3.16.

The interruption on any activated serving cell shall not be more than the values specified for SA in TS 38.133 [6] clause 8.2.2.2.2.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $\frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{NR \text{ slot length}}$ as defined in TS 38.133 [6] clause 8.3 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.7.5.3.14 SCell Activation for known SCell in FR2 inter-band

A.7.5.3.14.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.7.5.3.13.1 except the PCell and SCell are in FR2 inter-band, when the SCell in FR2 is known by the UE at the time of activation.

The supported test configurations are shown in table A.7.5.3.14.1-1 below. The general test parameters are described in Tables A.7.5.3.14.1-2, and cell specific test parameters are described in Tables A.7.5.3.14.1-3. OTA related test parameters A.7.5.3.14.1 are shown in table A.7.5.3.14.1-4 below.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on NR. The UE now starts monitoring the SCell. The test equipment sends a MAC message for activation of the SCell triggering the aperiodic CSI-RS for fast SCell activation.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m (where m mode 20=1), defines the start of time period T2. The UE shall be able to report valid CSI in PSCell for the activated SCell at latest in slot $m + \frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{NR \text{ slot length}}$, as defined in clause 8.3.6. The UE shall start reporting CSI in PSCell after at least one CSI-RS transmission occasion for channel measurement and reporting

after slot $(m+k)$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption due to activation of SCell shall occur in the slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR slot length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{\text{NR slot length}} + N_{\text{interruption}}$, as defined in clause 8.3, where $N_{\text{interruption}}$ is the interruption length given in clause 8.2

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PSCell during activation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

Table A.7.5.3.14.1-1: Supported test configurations for FR2 SCell activation in FR2 inter-band

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

Table A.7.5.3.14.1-2: General test parameters for FR2 SCell activation in FR2 inter-band

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels are used for this test. RF channel number 1 is in band 1 and RF channel number 2 is in band 2, where bands 1 and 2 are inter-band CA operating bands in FR2 as specified in Table 5.2A.2-1 in TS38.101-2.
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2.
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
Cell-individual offset for cells on NR channel number	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μs	≤8	A random value from 0μs to 8μs
A3-offset	dB	-15	
T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	2	During this time the UE shall activate the SCell.
T_{HARQ}	ms	$k_1 \times \text{NR slot length}$	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
$T_{\text{CSI_Reporting}}$	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.7.5.3.14.1-3: Cell specific test parameters for FR2 SCell activation in FR2 inter-band

Parameter ^{Note 5}	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		freq1	freq2	freq1	freq2

Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
Downlink initial BWP Configuration		DLBWP.0.1		DLBWP.0.1	
Downlink dedicated BWP Configuration		DLBWP.1.1		DLBWP.1.1	
Uplink initial BWP configuration		ULBWP.0.1		ULBWP.0.1	
Uplink dedicated BWP configuration		ULBWP.1.1		ULBWP.1.1	
TRS configuration		TRS.2.1 TDD		TRS.2.1 TDD	
TCI state		TCI.State.0		TCI.State.0	
BW _{channel}	MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Parameters		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Parameters		CCR.3.1 TDD	-	CCR.3.1 TDD	-
CSI-RS configuration		NA	NA	NA	CSI-RS.3.1 TDD ^{Note 2}
CSI reporting periodicity ^{Note 3}		NA	5	NA	5
OCNG Patterns		OP.1			
SSB Configuration		SSB.1 FR2			
SMTc Configuration		SMTc.1			
Aperiodic CSI-RS for SCell activation		-	-	-	TRS.2.3 TDD
gapBetweenBursts	Slot	N/A		0	
cellIndividualOffset	dB	N/A		16	
EPRE ratio of PSS to SSS	dB	0			
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Propagation conditions		AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+T _{L1-RSRP} during T2.					
Note 3: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.					

Table A.7.5.3.14.1-4: OTA related test parameters for FR2 SCell activation in FR2 inter-band

Parameter ^{Note 6}	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
AoA setup		Setup 3 as specified in clause A.3.15			
		AoA1		AoA2	
Assumption for UE beams ^{Note 7}		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-92.1		-92.1	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-83.1		-83.1	
$\hat{E}_s / N_{oc}$	dB	0		0	
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-83.1		N/A	
CSI-RSRP ^{Note2}	dBm/SCS ^{Note4}	N/A		-83.1	
$\hat{E}_s / I_{ot}$	dB	0		0	
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-51.1		-51.1	

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	All parameters apply for configuration 1
Note 7:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.3.14.2 Test Requirements

During T2 the UE shall start sending CSI report for the SCell in the configured slots for CSI reporting after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k). UE shall send the first CSI report for SCell after receiving at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k), or in the next available uplink resource for CSI reporting if the slot was subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PCell in the slot.

During T2, the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.7.5.3.14.1-2
- $T_{activation_time} = \max(T_{FirstATRS} + 5ms, T_{uncertainty_RRC} + T_{RRC_delay} - T_{HARQ})$
- $T_{CSI_Reporting} = 10ms$
- NR slot length is 0.125ms for this test case.

During T2, the interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $m + 1 + \frac{T_{HARQ} + 3ms + T_X}{NR\ slot\ length}$, where $T_X = 4ms$.

A.7.5.15 Void

A.7.5.4 Void

A.7.5.5 Beam Failure Detection and Link recovery procedures

A.7.5.5.1 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode

A.7.5.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.1.1-1, A.7.5.5.1.1-2, A.7.5.5.1.1-3 and A.7.5.5.1.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.1.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.7.5.5.1.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.7.5.5.1.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.7.5.5.1.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1-2		Cell 1	
RF Channel Number	1-2		1	
Duplex mode	1-2		TDD	
TDD Configuration	1-2		TDDConf.3.1	
BW _{channel}	1-2		100: N _{RB,c} = 66	
Data RBs allocated	1-2		66	
PDSCH/PDCCH subcarrier spacing	1-2	kHz	120	
DL initial BWP configuration	1-2		DLBWP.0.1	
DL dedicated BWP configuration	1-2		DLBWP.1.1	
UL initial BWP configuration	1-2		ULBWP.0.1	
UL dedicated BWP configuration	1-2		ULBWP.1.1	
PDSCH Reference Channel	1		SR.3.2 TDD	
	2		SR.3.3 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	
	2		CR.3.2 TDD	
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	
	2		CCR.3.7 TDD	
OCNG parameters	1-2		OP.1	
CP length	1-2		Normal	
PDSCH/PDCCH TCI state	1-2		TCI.State.0	
CSI-RS for tracking	1-2		TRS.2.1 TDD	
SSB Configuration	1		SSB.1 FR2	
	2		SSB.2 FR2	
SMTC Configuration	1-2		SMTC.3	
PRACH Configuration	1-2		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration	1-2		OFF	
SSB index assigned as BFD RS (q_0)	1-2		0	
SSB index assigned as CBD RS (q_1)	1-2		1	
SSB index assigned as RLM RS	1-2		0,1	
Beam failure detection transmission parameters	DCI format	1-2	1-0	
	Number of Control OFDM symbols	1-2	2	
	Aggregation level	1-2	CCE	8

	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		gp0	
gapOffset		1-2	ms	0	
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
		2		-92	
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	
T1		1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1-2	s	2.61	
T3		1-2	s	1.64	
T4		1-2	s	0	
T5		1-2	s	1.01	
D1		1-2	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.					
Note 2: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.7.5.5.1.1-3: Cell specific test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					

EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1-2	dB	5 ^{Note 11}	-3 ^{Note 11}	-12	-12	-12
SNR_SSB of set q_1	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of set q_1	Config 1	dBm/	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 2	SCS	-101.5	-101.5	-81.5	-81.5	-81.5
N_{oc}	Config 1,2	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.1.1-1.							
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.							
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.							
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband							

Table A.7.5.1.1-4: Void

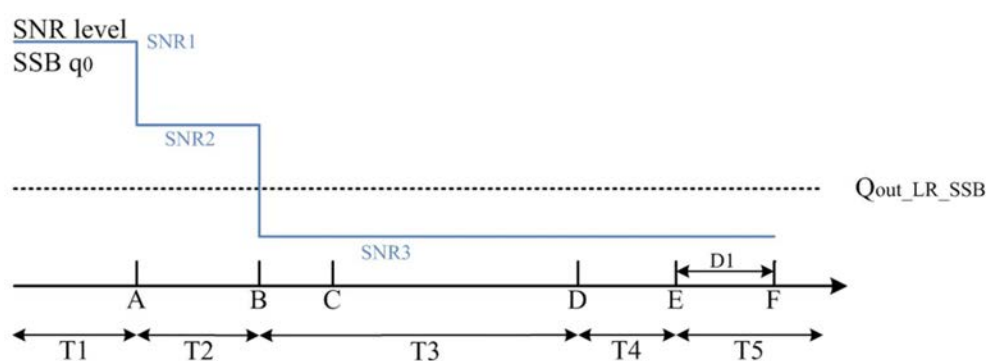


Figure A.7.5.1.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

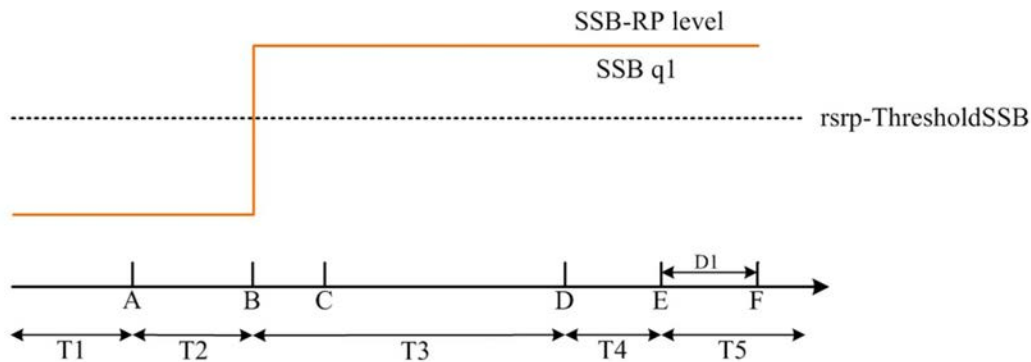


Figure A.7.5.5.1.1-2: SSB_RP level variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.7.5.5.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 960 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode

A.7.5.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.2.1-1, A.7.5.5.2.1-2, A.7.5.5.2.1-3, A.7.5.5.2.1-4 and A.7.5.5.2.1-5 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.2.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.7.5.5.2.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period

when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.7.5.5.2.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.7.5.5.2.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1-2		Cell 1	
RF Channel Number	1-2		1	
Duplex mode	1-2		TDD	
TDD Configuration	1-2		TDDConf.3.1	
BW _{channel}	1-2		100: N _{RB,C} = 66	
Data RBs allocated	1-2		66	
PDSCH/PDCCH subcarrier spacing	1-2	kHz	120	
DL initial BWP configuration	1-2		DLBWP.0.1	
DL dedicated BWP configuration	1-2		DLBWP.1.1	
UL initial BWP configuration	1-2		ULBWP.0.1	
UL dedicated BWP configuration	1-2		ULBWP.1.1	
PDSCH Reference Channel	1		SR.3.2 TDD	
	2		SR.3.3 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	
	2		CR.3.2 TDD	
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	
	2		CCR.3.7 TDD	
OCNG parameters	1-2		OP.1	
CP length	1-2		Normal	
PDSCH/PDCCH TCI state	1-2		TCI.State.0	
CSI-RS for tracking	1-2		TRS.2.1 TDD	
SSB Configuration	1		SSB.1 FR2	
	2		SSB.2 FR2	
SMTTC Configuration	1-2		SMTTC.3	
PRACH Configuration	1-2		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration	1-2		DRX.3	A.3.3.3
SSB index assigned as BFD RS (q ₀)	1-2		0	
SSB index assigned as CBD RS (q ₁)	1-2		1	
SSB index assigned as RLM RS	1-2		0,1	
Beam failure detection transmission parameters	DCI format	1-2	1-0	
	Number of Control OFDM symbols	1-2	2	
	Aggregation level	1-2	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0

	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1	dBm/SCS		-95	Threshold used for $Q_{in_LR_SSB}$
	2			-92	
powerControlOffsetSS	1-2			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1-2			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1-2			pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1-2			CSI-RS.3.1 TDD	
reportConfigType	1-2			periodic	
reportQuantity	1-2			cri-RI-PMI-CQI	
CSI reporting periodicity	1-2	slot		40	
CSI reporting offset	1-2	slot		4	
T310	1-2	ms		1000	
N310	1-2			2	
T1	1-2	s		1	The UE shall be fully synchronized to cell 1 during T1
T2	1-2	s		3.37	
T3	1-2	s		2.8	
T4	1-2	s		0	
T5	1-2	s		0.61	
D1	1-2	s		0.57	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.					
Note 2: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.7.5.5.2.1-3: Cell specific test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1,2	dB	5 ^{Note 11}	-3 ^{Note 11}	-12	-12	-12
SNR_SSB of set q_1	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of set q_1	Config 1	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 2		-101.5	-101.5	-81.5	-81.5	-81.5

N_{oc}	Config 1-2	dBm/120 KHz	-104.7
Propagation condition			TDL-A 30ns 75Hz
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. Note 4: Void Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.1.1-1. Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6. Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation. Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.			

Table A.7.5.5.2.1-4: Void

Table A.7.5.5.2.1-5: Void

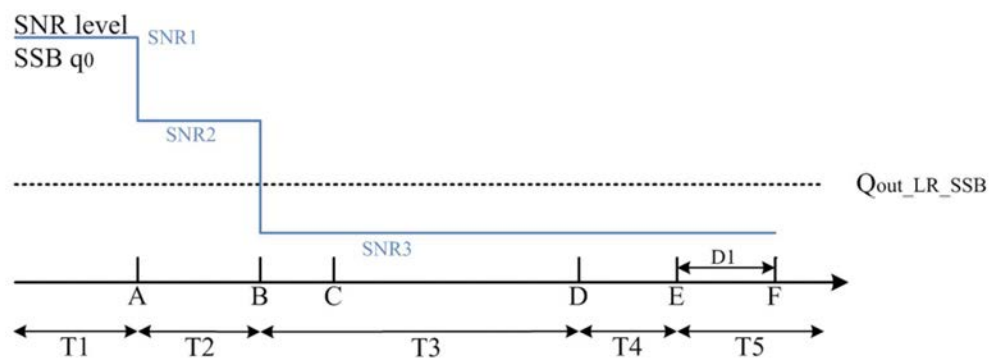


Figure A.7.5.5.2.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in DRX mode

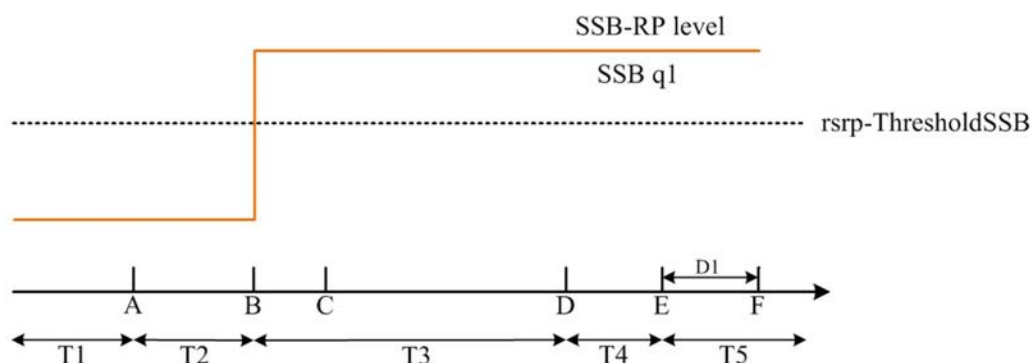


Figure A.7.5.5.2.1-2: SSB_RP level variation for SSB-based beam failure detection and link recovery testing in DRX mode

A.7.5.5.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 560 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.3 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.7.5.5.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.3.1-1, A.7.5.5.3.1-2, and A.7.5.5.3.1-3 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.3.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.7.5.5.3.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.7.5.5.3.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.5.3.1-2: General test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active PCell		1		Cell 1	
RF Channel Number		1		1	
Duplex mode		1		TDD	
TDD Configuration		1		TDDConf.3.1	
BW_{channel}		1		100: $N_{RB,c} = 66$	
Data RBs allocated		1		66	
PDSCH/PDCCH subcarrier spacing		1	kHz	120	
DL initial BWP configuration		1		DLBWP.0.1	
DL dedicated BWP configuration		1		DLBWP.1.1	
UL initial BWP configuration		1		ULBWP.0.1	
UL dedicated BWP configuration		1		ULBWP.1.1	
PDSCH Reference Channel		1		SR.3.2 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
OCNG parameters		1		OP.1	
CP length		1		Normal	
PDSCH/PDCCH TCI state		1		TCI.State.0	
CSI-RS for tracking		1		TRS.2.1 TDD	
SSB Configuration		1		SSB.1 FR2	
SMTTC Configuration		1		SMTTC.3	
PRACH Configuration		1		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration		1		OFF	
CSI-RS configuration for BFD/CBD/RLM		1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)		1		0	
CSI-RS index assigned as CBD RS (q_1)		1		1	
CSI-RS index assigned as RLM RS		1		0,1	
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	
	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	
Gap pattern ID		1		N/A	
rlmInSyncOutOfSyncThreshold		1		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$

powerControlOffsetSS	1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType	1		periodic	
reportQuantity	1		cri-RI-PMI-CQI	
CSI reporting periodicity	1	slot	40	
CSI reporting offset	1	slot	4	
T310	1	ms	1000	
N310	1		2	
T1	1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1	s	1.17	
T3	1	s	0.9	
T4	1	s	0	
T5	1	s	0.31	
D1	1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.5.3.1-3: Cell specific test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumptpion for UE beams ^{Note 10}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5 ^{Note 11}	-3 ^{Note 11}	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1	dBm/S CS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.3.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.7.5.5.3.1-4: Void

Table A.7.5.5.3.1-5: Void

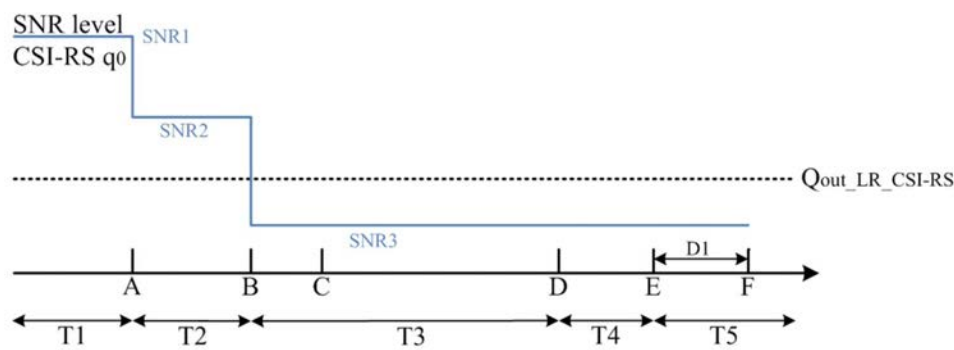


Figure A.7.5.5.3.1-1: SNR variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

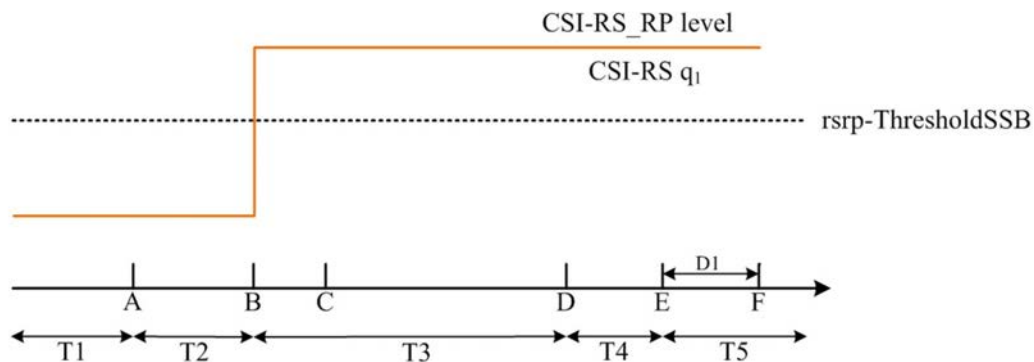


Figure A.7.5.5.3.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

A.7.5.5.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.4 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode

A.7.5.5.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UE's active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.4.1-1, A.7.5.5.4.1-2, A.7.5.5.4.1-3, and A.7.5.5.4.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.4.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.7.5.5.4.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-

duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.7.5.5.4.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.5.4.1-2: General test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1		Cell 1	
RF Channel Number	1		1	
Duplex mode	1		TDD	
TDD Configuration	1		TDDConf.3.1	
BW _{channel}	1		100: N _{RB,c} = 66	
Data RBs allocated	1		66	
PDSCH/PDCCH subcarrier spacing	1	kHz	120	
DL initial BWP configuration	1		DLBWP.0.1	
DL dedicated BWP configuration	1		DLBWP.1.1	
UL initial BWP configuration	1		ULBWP.0.1	
UL dedicated BWP configuration	1		ULBWP.1.1	
PDSCH Reference Channel	1		SR.3.2 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	
OCNG parameters	1		OP.1	
CP length	1		Normal	
PDSCH/PDCCH TCI state	1		TCI.State.0	
CSI-RS for tracking	1		TRS.2.1 TDD	
SSB Configuration	1		SSB.1 FR2	
SMTTC Configuration	1		SMTTC.3	
PRACH Configuration	1		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration	1		DRX.3	A.3.3.3
CSI-RS configuration for BFD/CBD/RLM	1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q ₀)	1		0	
CSI-RS index assigned as CBD RS (q ₁)	1		1	
CSI-RS index assigned as RLM RS	1		0,1	
Beam failure detection transmission parameters	DCI format	1	1-0	
	Number of Control OFDM symbols	1	2	
	Aggregation level	1	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0
	DMRS precoder granularity	1		REG bundle size
	REG bundle size	1		6
Gap pattern ID	1		N/A	

rlmInSyncOutOfSyncThreshold	1		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1	dBm/SCS	-95	Threshold used for $Q_{in LR SSB}$
powerControlOffsetSS	1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType	1		periodic	
reportQuantity	1		cri-RI-PMI-CQI	
CSI reporting periodicity	1	slot	40	
CSI reporting offset	1	slot	4	
T310	1	ms	1000	
N310	1		2	
T1	1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1	s	5.43	
T3	1	s	5.16	
T4	1	s	0	
T5	1	s	0.31	
D1	1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.5.4.1-3: Cell specific test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5 ^{Note 11}	-3 ^{Note 11}	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
Note 4:	Void
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.4.1-1.
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
Note 10:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.7.5.5.4.1-4: Void

Table A.7.5.5.4.1-5: Void

Table A.7.5.5.4.1-6: Void

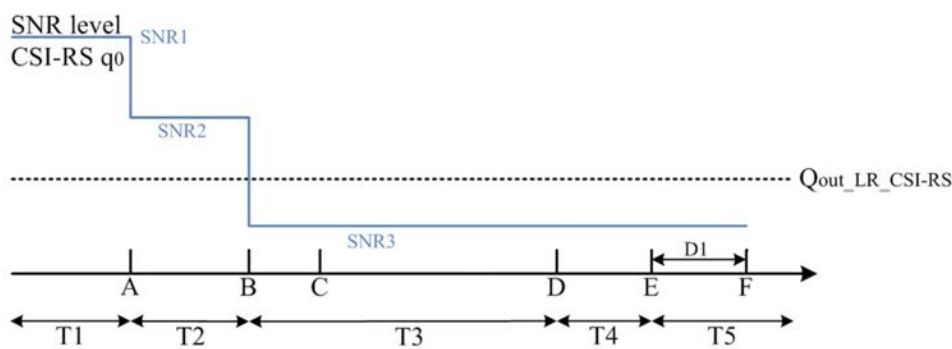


Figure A.7.5.5.4.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

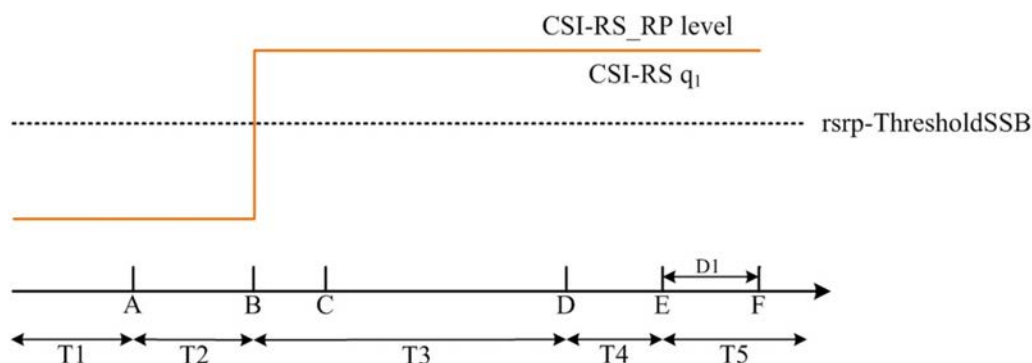


Figure A.7.5.5.4.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing in DRX mode

A.7.5.5.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.5 Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode

A.7.5.5.5.1 Test Purpose and Environment

The purpose is to test scheduling availability restrictions when the UE is performing beam failure detection or when the UE is performing L1-RSRP measurement for candidate beam detection, when no DRX is used. This test will verify the scheduling availability restriction requirements in clause 8.5.7 and 8.5.8.

The test parameters are given in Tables A.7.5.5.5.1-1, A.7.5.5.5.1-2 and A.7.5.5.5.1-3 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.5.1-1 shows the variation of the downlink SNR of the SSB index 0 in the active cell to emulate SSB based beam failure. Figure A.7.5.5.5.1-2 shows the variation of the downlink L1-RSRP of the SSB index 1 used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. This test will focus on the scheduling availability during beam failure detection and candidate beam detection. In the test, DRX configuration is not enabled. Test is to test the scheduling availability restriction of UE performing

beam failure detection and candidate beam detection when SSB RS configured for Beam failure detection and candidate beam detection. During the test the UE is scheduled to transmit continuously in UL.

Table A.7.5.5.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.5.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active PCell		1-2		Cell 1	
RF Channel Number		1-2		1	
Duplex mode		1-2		TDD	
TDD Configuration		1-2		TDDConf.3.1	
BW _{channel}		1-2		100: N _{RB,C} = 66	
Data RBs allocated		1-2		66	
PDSCH/PDCCH subcarrier spacing		1-2	kHz	120	
DL initial BWP configuration		1-2		DLBWP.0.1	
DL dedicated BWP configuration		1-2		DLBWP.1.1	
UL initial BWP configuration		1-2		ULBWP.0.1	
UL dedicated BWP configuration		1-2		ULBWP.1.1	
PDSCH Reference Channel		1		SR.3.2 TDD	
		2		SR.3.3 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	
		2		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
		2		CCR.3.7 TDD	
OCNG parameters		1-2		OP.1	
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	
CSI-RS for tracking		1-2		TRS.2.1 TDD	
SSB Configuration		1		SSB.1 FR2	
		2		SSB.2 FR2	
SMTc Configuration		1-2		SMTc.1	
PRACH Configuration		1-2		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration		1-2		OFF	
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	

rlmInSyncOutOfSyncThreshold	1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
	2		-92	
powerControlOffsetSS	1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1-2		CSI-RS.3.1 TDD	
reportConfigType	1-2		periodic	
reportQuantity	1-2		cri-RI-PMI-CQI	
CSI reporting periodicity	1-2	slot	40	
CSI reporting offset	1-2	slot	4	
T310	1-2	ms	1000	
N310	1-2		2	
T1	1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-2	s	2.6	
T3	1-2	s	1.64	
T4	1-2	s	0	
T5	1-2	s	1.01	
D1	1-2	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.5.1-3: Cell specific test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA Setup			Setup1 defined in A.3.15.1				
Assumption for UE beams ^{Note 10}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SSB index assigned as BFD RS (q_0)	Config 1-4		0	0	Note 12		
SSB index assigned as CBD RS (q_1)	Config 1-4		1	1	1	1	1
SNR of SSB index 0	Config 1-2	dB	5 ^{Note 11}	-3 ^{Note 11}	-12	-12	-12
SNR of SSB index 1	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of SSB index 1	Config 1	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 2		-101.5	-101.5	-81.5	-81.5	-81.5

N_{oc}	Config 1-2	dBm/12 0 kHz	-104.7
Propagation condition			TDL-A 30ns 75Hz
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. Note 4: Void Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.1-1. Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6. Note 10: Information about types of UE beam given in B.2.1.3 and does not limit UE implementation or test system implementation Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband. Note 12: BFD RS (q_0) is configured as SSB index 0 at the start of T3, and it is reconfigured by RRC as SSB index 1 after the UE transmits the preamble on a beam associated with the candidate beam set q_1.			

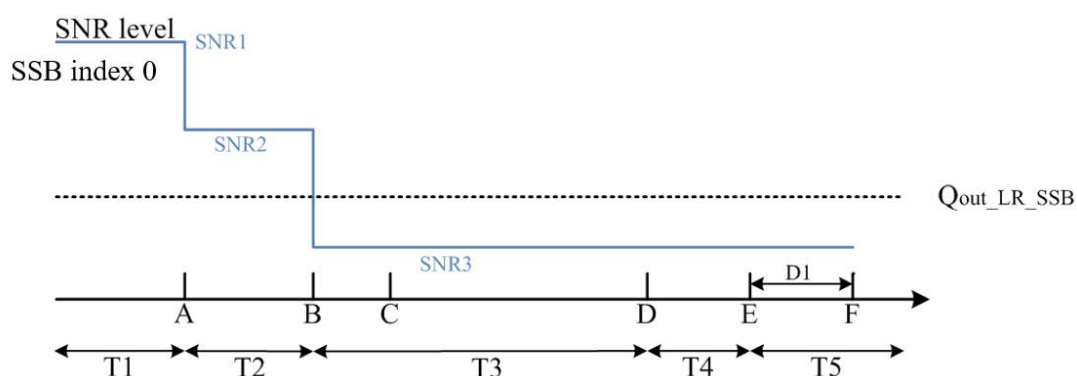


Figure A.7.5.5.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

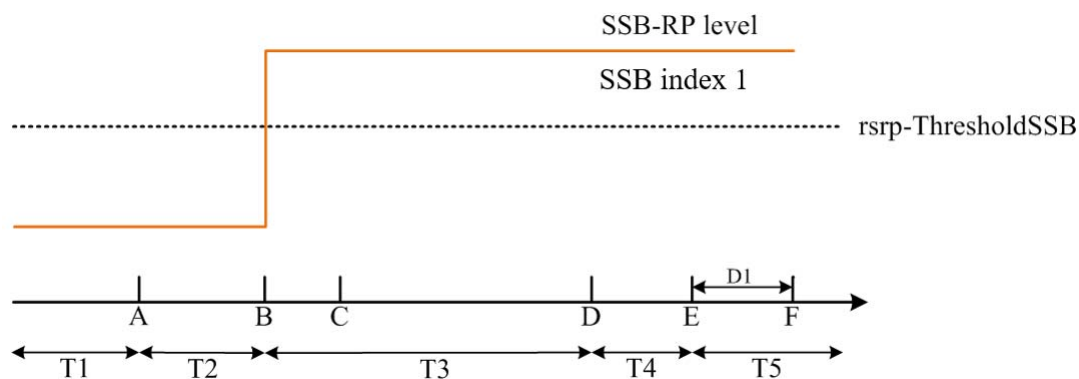


Figure A.7.5.5.1-2: SSB_RP level variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.7.5.5.5.2 Test Requirements

The UE behaviour during time duration T3 follows the requirements defined in clause 8.5.7.3:

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on BFD-RS symbols to be measured for beam failure detection.

The UE behaviour during time durations T4 and T5 follows the requirements defined in clause 8.5.8.3:

- The UE is not expected to transmit PUCCH/PUSCH or receive PDCCH/PDSCH on reference symbols to be measured for candidate beam detection.

A.7.5.5.6 Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.7.5.5.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for an active SCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell with *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 SCell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.6.1-1, A.7.5.5.6.1-2 and A.7.5.5.6.1-3. There are two cells, cell 1 is the active PCell and cell 2 is the active SCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.6.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active SCell to emulate CSI-RS based beam failure. Figure A.7.5.5.6.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.7.5.5.6.1-1: Supported test configurations for FR2 PCell and SCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.5.6.1-2: General test parameters for FR2 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active PCell		1		Cell 1	
RF Channel Number for PCell		1		1	
Active SCell		1		Cell 2	
RF Channel Number for SCell		1		2	
Duplex mode		1		TDD	
TDD Configuration		1		TDDConf.3.1	
BW_{channel}		1	MHz	100: $N_{RB,C} = 66$	
Data RBs allocated		1		66	
PDSCH/PDCCH subcarrier spacing		1	kHz	120	
DL initial BWP configuration		1		DLBWP.0.1	
DL dedicated BWP configuration		1		DLBWP.1.1	
UL initial BWP configuration		1		ULBWP.0.1	
UL dedicated BWP configuration		1		ULBWP.1.1	
PDSCH Reference Channel		1		SR.3.2 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	A.3.1.2
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
OCNG parameters		1		OP.1	A.3.2.1
CP length		1		Normal	
PDSCH/PDCCH TCI state		1		TCI.State.0	
CSI-RS for tracking		1		TRS.2.1 TDD	
SSB Configuration		1		SSB.3 FR2	A.3.10
SMT-C Configuration		1		SMT-C.3	A.3.11
PRACH Configuration		1		FR2 PRACH configuration 4	Table A.3.8.3.4-1
DRX configuration		1		OFF	
CSI-RS configuration for BFD/CBD on SCell		1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)		1		0	
CSI-RS index assigned as CBD RS (q_1)		1		1	
CSI-RS configuration for RLM on PCell		1		CSI-RS.3.2 TDD	A.3.14.2
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	
	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	
Gap pattern ID		1		N/A	
schedulingRequestID-BFR-SCell-r16		1		Configured	
Periodicity of PUCCH for SR configuration for BFR on SCell		1	slot	40	5ms
Offset of PUCCH for SR configuration for BFR on SCell		1	slot	4	

PUCCH parameters for SR configuration for BFR on SCell	1		Table 8.3.3.1.2-1 in [13]	
rlmInSyncOutOfSyncThreshold	1		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1	dBm/SCS	-95	Threshold used for $Q_{in LR SSB}$
powerControlOffsetSS	1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType	1		periodic	
reportQuantity	1		cri-RI-PMI-CQI	
CSI reporting periodicity	1	slot	40	
CSI reporting offset	1	slot	4	
T310	1	ms	1000	
N310	1		2	
T1	1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1	s	1.17	
T3	1	s	0.9	
T4	1	s	0	
T5	1	s	0.31	
D1	1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.5.6.1-3: Cell specific test parameters for FR2 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Cell 1 T1 to T5	Cell2 Test 1				
				T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15	Setup 1 defined in A.3.15				
Assumptpion for UE beams ^{Note 10}			Rough	Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1	dB	5	5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1	dBm/SCS kHz	-104.5	-104.5	-104.5	-84.5	-84.5	-84.5

N_{oc}	Config 1	dBm/ 120kHz	-104.7	-104.7
Propagation condition			TDL-A 30ns 75Hz	TDL-A 30ns 75Hz
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. Note 4: Void Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS. Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.6.1-1. Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6. Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				

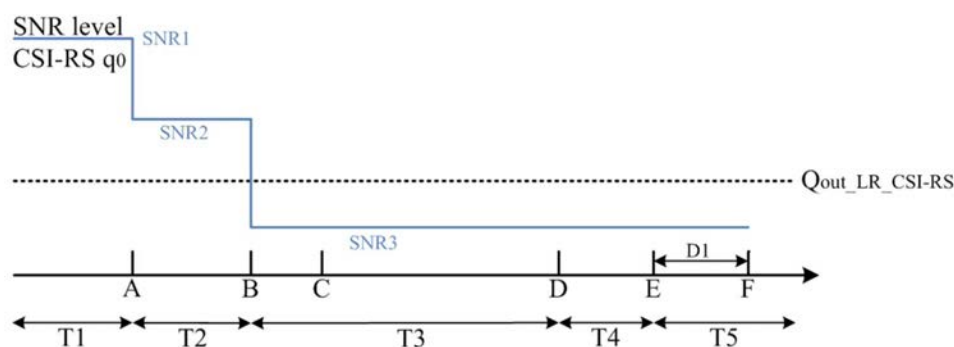


Figure A.7.5.5.6.1-1: SNR and L1-RSRP variation for beam failure detection and link recovery testing for SCell in non-DRX mode

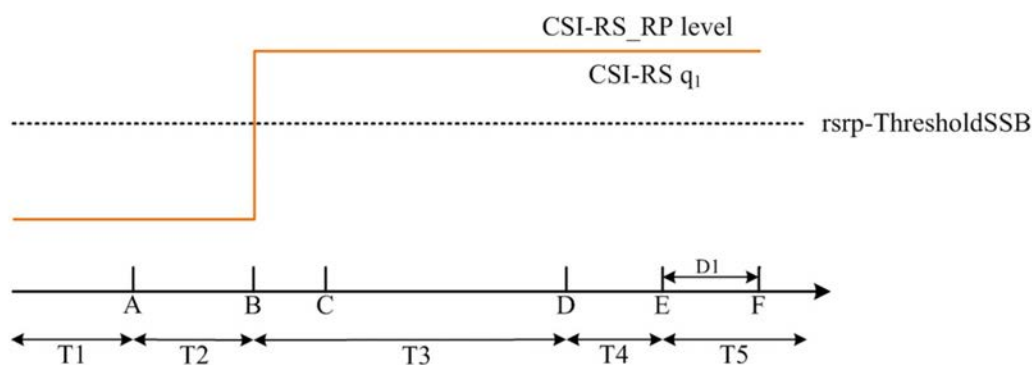


Figure A.7.5.5.6.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing for SCell in non-DRX mode

A.7.5.5.6.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 in A.7.5.5.6.1 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initial link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260 + 10$ ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_1 . The UE shall not transmit PUCCH with an LRR with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.7 Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in DRX mode

A.7.5.5.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for an active SCell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the SCell with *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 SCell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.7.1-1, A.7.5.5.7.1-2 and A.7.5.5.7.1-3. There are two cell, cell 1 is the active PCell and cell 2 is the active SCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.7.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active SCell to emulate CSI-RS based beam failure. Figure A.7.5.5.7.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.7.5.5.7.1-1: Supported test configurations for FR2 PCell and SCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.5.7.1-2: General test parameters for FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1		Cell 1	

RF Channel Number for PCell	1		1	
Active SCell	1		Cell 2	
RF Channel Number for SCell	1		2	
Duplex mode	1		TDD	
TDD Configuration	1		TDDConf.3.1	
BW _{channel}	1	MHz	100: N _{RB,c} = 66	
Data RBs allocated	1		66	
PDSCH/PDCCH subcarrier spacing	1	kHz	120	
DL initial BWP configuration	1		DLBWP.0.1	
DL dedicated BWP configuration	1		DLBWP.1.1	
UL initial BWP configuration	1		ULBWP.0.1	
UL dedicated BWP configuration	1		ULBWP.1.1	
PDSCH Reference Channel	1		SR.3.2 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	A.3.1.2
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	
OCNG parameters	1		OP.1	A.3.2.1
CP length	1		Normal	
PDSCH/PDCCH TCI state	1		TCI.State.0	
CSI-RS for tracking	1		TRS.2.1 TDD	
SSB Configuration	1		SSB.3 FR2	A.3.10
SMTC Configuration	1		SMTC.3	A.3.11
PRACH Configuration	1		FR2 PRACH configuration 4	Table A.3.8.3.4-1
DRX configuration	1		DRX.3	A.3.3.3
CSI-RS configuration for BFD/CBD on SCell	1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q ₀)	1		0	
CSI-RS index assigned as CBD RS (q ₁)	1		1	
CSI-RS configuration for RLM on PCell	1		CSI-RS.3.2 TDD	A.3.14.2
Beam failure detection transmission parameters	DCI format	1	1-0	
	Number of Control OFDM symbols	1	2	
	Aggregation level	1	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0
	DMRS precoder granularity	1	REG bundle size	
	REG bundle size	1	6	
Gap pattern ID	1		N/A	
schedulingRequestID-BFR-SCell-r16	1		Configured	
Periodicity of PUCCH for SR configuration for BFR on SCell	1	slot	40	5ms
Offset of PUCCH for SR configuration for BFR on SCell	1	slot	4	
PUCCH parameters for SR configuration for BFR on SCell	1		Table 8.3.3.1.2-1 in [13]	
rlmInSyncOutOfSyncThreshold	1		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1	dBm/SCS	-95	Threshold used for Q _{in_LR_SSB}
powerControlOffsetSS	1		db0	Used for deriving rsrp-ThresholdCSI-RS

beamFailureInstanceMaxCount	1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType	1		periodic	
reportQuantity	1		cri-RI-PMI-CQI	
CSI reporting periodicity	1	slot	40	
CSI reporting offset	1	slot	4	
T310	1	ms	1000	
N310	1		2	
T1	1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1	s	5.43	
T3	1	s	5.16	
T4	1	s	0	
T5	1	s	0.31	
D1	1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.5.7.1-3: Cell specific test parameters for FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Cell1	Test 1 Cell2				
				T1	T2	T3	T4	T5
AoA setup			T1 to T5 Setup 1 defined in A.3.15	Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}			Rough	Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q ₀	Config 1	dB	5	5	-3	-12	-12	-12
SNR_CSI-RS of set q ₁	Config 1	dB	0.2	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q ₁	Config 1	dBm/SCS kHz	-104.5	-104.5	-104.5	-84.5	-84.5	-84.5
N _{oc}	Config 1	dBm/120 kHz	-104.7	-104.7				
Propagation condition			TDL-A 30ns 75Hz	TDL-A 30ns 75Hz				

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Void
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
- Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.7.1-1.
- Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
- Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

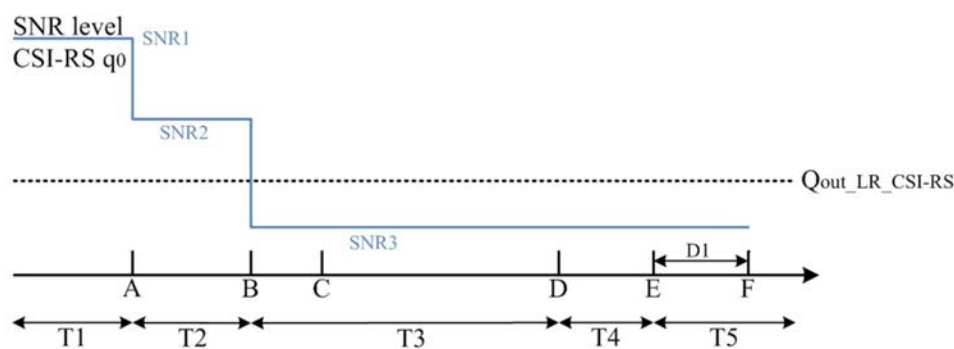


Figure A.7.5.5.7.1-1: SNR variation for beam failure detection and link recovery testing for SCell in DRX mode

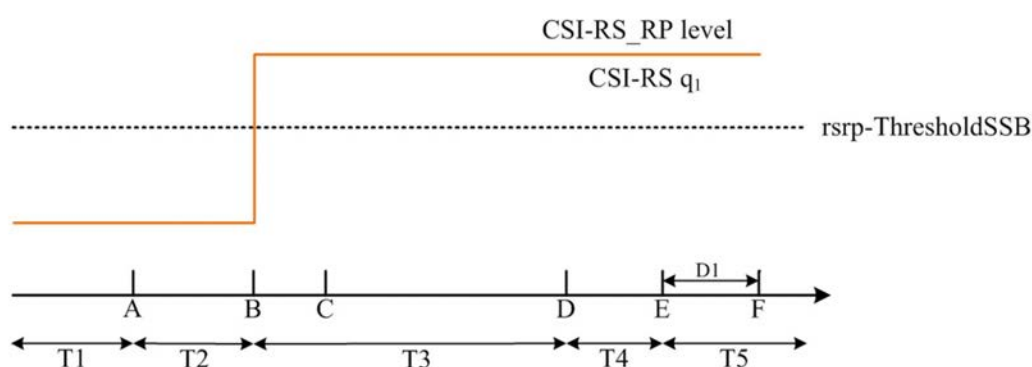


Figure A.7.5.5.7.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing for SCell in DRX mode

A.7.5.5.7.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 in A.7.5.5.7.1 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initial link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260 + 10$ ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set q_1 . The UE shall not transmit PUCCH with an LRR with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.8 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode for UE fulfilling relaxed measurement criterion

A.7.5.5.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.3.4 for UE fulfilling good serving cell quality relaxed measurement criteria. The test parameters are given in Tables A.7.5.5.8.1-1, A.7.5.5.8.1-2, A.7.5.5.8.1-3, and A.7.5.5.8.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.8.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.7.5.5.8.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

As specified in the Test Purpose, the UE is configured with the relaxed measurement criterion for both low mobility and good serving cell quality defined in clause 5.7.13.2 in TS 38.331 [2]. At the beginning of T1, the UE has fulfilled the good serving cell quality relaxation measurements criterion and is performing relaxed measurements for beam failure detection.

- *goodServingCellEvaluationBFD* [2] criterion is configured according to the parameters listed in Table A.7.5.5.8.1-2;
- *lowMobilityEvaluationConnected* [2] criterion is configured according to the parameters listed in Table A.7.5.5.8.1-2.

Table A.7.5.5.8.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.8.1-2: General test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1		Cell 1	
RF Channel Number	1		1	
Duplex mode	1		TDD	
TDD Configuration	1		TDDConf.3.1	
BW _{channel}	1		100: N _{RB,c} = 66	
Data RBs allocated	1		66	
PDSCH/PDCCH subcarrier spacing	1	kHz	120	
DL initial BWP configuration	1		DLBWP.0.1	
DL dedicated BWP configuration	1		DLBWP.1.1	
UL initial BWP configuration	1		ULBWP.0.1	
UL dedicated BWP configuration	1		ULBWP.1.1	
PDSCH Reference Channel	1		SR.3.2 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	
OCNG parameters	1		OP.1	
CP length	1		Normal	
PDSCH/PDCCH TCI state	1		TCI.State.0	
CSI-RS for tracking	1		TRS.2.1 TDD	
SSB Configuration	1		SSB.1 FR2	
SMTC Configuration	1		SMTC.3	
PRACH Configuration	1		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration	1		DRX.3	A.3.3.3
CSI-RS configuration for BFD/CBD/RLM	1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q ₀)	1		0	
CSI-RS index assigned as CBD RS (q ₁)	1		1	
CSI-RS index assigned as RLM RS	1		0,1	
Beam failure detection transmission parameters	DCI format	1	1-0	
	Number of Control OFDM symbols	1	2	
	Aggregation level	1	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0
	DMRS precoder granularity	1		REG bundle size

	REG bundle size	1		6	
Gap pattern ID		1		N/A	
rlmInSyncOutOfSyncThreshold		1		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType		1		periodic	
reportQuantity		1		cri-RI-PMI-CQI	
CSI reporting periodicity		1	slot	40	
CSI reporting offset		1	slot	4	
T310		1	ms	1000	
N310		1		1	
offset		4	dB	N/A	offset in goodServingCellEvaluationBFD
s-SearchDeltaP-Connected		1	dB	6	Used to determine if low mobility relaxed criterion is fulfilled
t-SearchDeltaP-Connected		1	s	5	Used to determine if low mobility relaxed criterion is fulfilled
T1		1	s	[6]	The UE shall be fully synchronized to cell 1 during T1. UE is performing relaxed measurements for BFD.
T2		1	s	[3.6]	
T3		1	s	[9.64]	
T4		1	s	0	
T5		1	s	0.31	
D1		1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.7.5.5.8.1-3: Cell specific test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q ₀	Config 1	dB	5 ^{Note 11}	5 ^{Note 11}	-12	-12	-12
SNR_CSI-RS of set q ₁	Config 1	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q ₁	Config 1	dBm/S CS	-104.5	-104.5	-84.5	-84.5	-84.5
N _{oc}	Config 1	dBm/12 0 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Void
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
- Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.4.1-1.
- Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
- Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
- Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

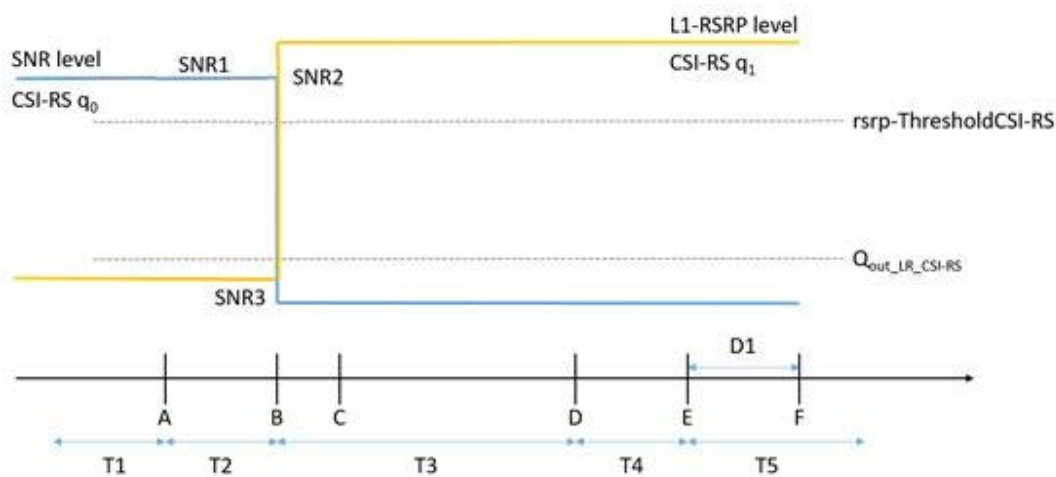


Figure A.7.5.5.8.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.7.5.5.8.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery, and exit from relaxed measurements. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.9 TRP specific Beam Failure Detection and Link Recovery Test for FR2 SCell configured with CSI-RS-based BFD and LR in DRX mode

A.7.5.5.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects TRP specific CSI-RS-based beam failure and link recovery in the sets $\bar{q}_{0,0}$ and $\bar{q}_{1,0}$ for TRP0 when DRX is used for an FR2 active SCell requirements in clause 8.18.

The test parameters are given in Tables A.7.5.5.9.1-1, A.7.5.5.9.1-2 and A.7.5.5.9.1-3. There are two cell, cell 1 is the active PCell and cell 2 is the active SCell, in the test. SCell is configured with two TRPs. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.9.1-1 shows the variation of the downlink SNR of the CSI-RS in set $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ in the active SCell for TRP0 and TRP1 respectively. Figure A.7.5.5.9.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in $\bar{q}_{1,0}$ for TRP0. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.7.5.5.9.1-1: Supported test configurations for FR2 PCell and SCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.7.5.5.9.1-2: General test parameters for FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number for PCell			1	
Active SCell			Cell 2	
RF Channel Number for SCell			2	
Duplex mode	Config 1		TDD	
BW channel	Config 1		100: $N_{RB,C} = 66$	
DL initial BWP configuration	Config 1		DLBWP.0.1	
DL dedicated BWP configuration	Config 1		DLBWP.1.1	
UL initial BWP configuration	Config 1		ULBWP.0.1	
UL dedicated BWP configuration	Config 1		ULBWP.1.1	
TDD Configuration	Config 1		TDDConf.3.1	
CORESET Reference Channel	Config 1		CR.3.1 TDD	A.3.1.2
SSB Configuration	Config 1		SSB.3 FR2	A.3.11
SMTC Configuration	Config 1		SMTC.3	A.3.10
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz	
PRACH Configuration	Config 1		Table A.3.8.3.1-1	

CSI-RS configuration for TRP0	Config 1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS configuration for TRP1	Config 1		CSI-RS.3.6 TDD	A.3.14.2
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.3.1 TDD	A.3.14.2
TRS configuration	Config 1		TRS.2.1 TDD	
TCI configuration	Config 1		CSI-RS.Config.0	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.3	
Gap pattern ID			N.A.	
schedulingRequestID-BFR-SCell-r16			Configured	
Periodicity of PUCCH for SR configuration for BFR on SCell		Slot	40	5ms
Offset of PUCCH for SR configuration for BFR on SCell		Slot	5	
PUCCH parameters for SR configuration for BFR on SCell			Table 8.3.3.1.2-1 in [13]	
csi-RS-Index assigned as BFD RS in set (q00)			0	
csi-RS-Index assigned as BFD RS in set (q01)			2	
CSI-RS index assigned as RLM RS			0, 1	
CSI-RS Index assigned as CBD RS in set (q10)			1	
CSI-RS Index assigned as CBD RS in set (q11)			3	
SSB index assigned as RLM RS			0, 1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdCSI-RS	Config 1	dBm/SCS	-95	Threshold used for $Q_{in_LR_CSI-RS}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS

beamFailureInstanceMaxCount		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		pbfd4	see TS 38.321 [7], clause 5.17
T310 Timer	ms	1000	
N310		2	
T1	s	1	During this time the the UE shall be fully synchronized to cell 1
T2	s	10.81	
T3	s	10.28	
T4	s	0	
T5	s	0.57	
D1	s	0.53	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.7.5.5.9.1-3: Cell specific test parameters for FR2 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Cell1	Cell2				
		T1 to T5	T1	T2	T3	T4	T5
AoA setup		Setup 3 as specified in clause A.3.15 ^{Note 11}					
Assumption for UE beams ^{Note 10}		Rough	Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB						
EPRE ratio of PBCH DMRS to SSS	dB						
EPRE ratio of PBCH to PBCH DMRS	dB						
EPRE ratio of PSS to SSS	dB						
EPRE ratio of PDSCH DMRS to SSS	dB						
EPRE ratio of PDSCH to PDSCH DMRS	dB						
EPRE ratio of OCNG DMRS to SSS	dB						
EPRE ratio of OCNG to OCNG DMRS	dB						
SNR_CSI-RS of set q _{0,0}	dB	5	5	-3	-12	-12	-12
SNR_CSI-RS of set q _{0,1}	dB	5	5	5	5	5	5
SNR_CSI-RS of set q _{1,0}	dB	0.2	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q _{1,0}	dBm/ SCS kHz	-104.5	-104.5	-104.5	-84.5	-84.5	-84.5
N _{oc}	dBm/120 kHz	-104.7	-104.7				
Propagation condition		TDL-A 30ns 75Hz	TDL-A 30ns 75Hz				

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Void
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
- Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.7.1-1.
- Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
- Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
- Note 11: AoA1 for PCell and TRP1 of SCell, AoA2 for TRP2 of SCell

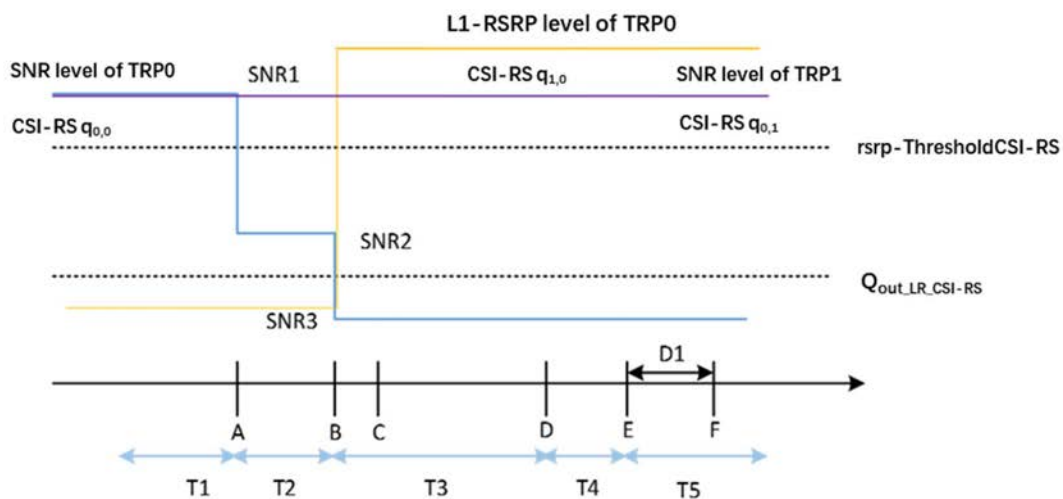


Figure A.7.5.5.9.1-1: SNR and L1-RSRP variation for beam failure detection and link recovery testing for SCell in DRX mode

A.7.5.5.9.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 in A.7.5.5.9.1 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1 for TRP0 and TRP1.

During the period from time point A to time point B the UE shall transmit uplink signal in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3, T4, T5, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 0 for TRP1.

During T3 the UE shall detect beam failure and initiate link recovery for TRP0. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set $q_{1,0}$.

No later than time point F occurring no later than $D1 = [520] + 10$ ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{0,1}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{0,1}$ earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.10 TRP specific Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode

A.7.5.5.10.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects TRP specific SSB-based beam failure and link recovery in the sets $\bar{q}_{0,0}$ and $\bar{q}_{1,0}$ for TRP0 with *schedulingRequestID-BFR-r17* configured, when no DRX is used for an FR2 serving cell requirements in clause 8.18.

The test parameters are given in Tables A.7.5.5.10.1-1, A.7.5.5.10.1-2, A.7.5.5.10.1-3 and A.7.5.5.10.1-4 below. There is one active serving cell configured with two TRPs in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.10.1-1 shows the variation of the downlink SNR of the SSB in set $\bar{q}_{0,0}$ and $\bar{q}_{0,1}$ for TRP0 and TRP1 respectively. Figure A.7.5.5.10.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set $\bar{q}_{1,0}$ for TRP0.

Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.7.5.5.10.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	TDD duplex mode, 240 kHz SSB SCS, 100 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2	

Table A.7.5.5.10.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment Same configuration for both TRP wherever applicable
			Test 1	
Active PCell			Cell 1	
RF Channel Number for PCell			1	
Duplex mode	Config 1,2		TDD	
TDD Configuration	Config 1,2		TDDConf.3.1	
BW channel	Config 1,2		100: $N_{RB,C} = 66$	
Data RBs allocated	Config 1,2		66	
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	120	
DL initial BWP configuration	Config 1,2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1	
UL initial BWP configuration	Config 1,2		ULBWP.0.1	

UL dedicated BWP configuration	Config 1,2		ULBWP.1.1	
PDSCH Reference Channel	Config 1		SR.3.2 TDD	
	Config 2		SR.3.3 TDD	
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	
	Config 2		CR.3.2 TDD	
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD	A.3.1.2
	Config 2		CCR.3.7 TDD	
OCNG parameters	Config 1,2		OP.1	
CP length	Config 1,2		Normal	
PDSCH/PDCCH TCI state	Config 1,2		TCI.State.0	
CSI-RS for tracking	Config 1,2		TRS.2.1 TDD	
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.3.1 TDD	
reportConfigType	Config 1,2		periodic	
reportQuantity	Config 1,2		cri-RI-PMI-CQI	
CSI reporting periodicity	Config 1,2	slot	40	
CSI reporting offset	Config 1,2	slot	4	
SSB Configuration for TRP0	Config 1		SSB.1 FR2	
	Config 2		SSB.2 FR2	
SSB Configuration for TRP1	Config 1		SSB.9 FR2	
	Config 2		SSB.10 FR2	
SMTC Configuration	Config 1,2		SMTC.3	A.3.10
PRACH Configuration	Config 1,2		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration	Config 1,2		OFF	
SSB Index assigned as BFD RS (q0,0)	Config 1,2		0	
SSB Index assigned as CBD RS (q1,0)	Config 1,2		1	
SSB Index assigned as BFD RS (q0,1)	Config 1,2		2	
SSB Index assigned as CBD RS (q1,1)	Config 1,2		3	
SSB Index assigned as RLM RS	Config 1,2		0,1,2,3	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
Gap pattern ID			gp0	
gapOffset			0	
schedulingRequestID-BFR- r17			Configured	
Periodicity of PUCCH for SR configuration for BFR on PCell		slot	40	5ms

rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
	Config 2		-92	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	2.61	
T3		s	1.64	
T4		s	0	
T5		s	1.01	
D1		s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.5.10.13: Cell specific test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 3 as specified in clause A.3.15 ^{Note 12}				
Assumption for UE beams ^{Note 10}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set $q_{0,0}$	Config 1-2	dB	5 ^{Note 11}	-3 ^{Note 11}	-12	-12	-12
SNR_SSB of set $q_{0,1}$	Config 1-2	dB	5 ^{Note 11}	5 ^{Note 11}	5 ^{Note 11}	5 ^{Note 11}	5 ^{Note 11}
SNR_SSB of set $q_{1,0}$	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of set $q_{1,0}$	Config 1	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 2		-101.5	-101.5	-81.5	-81.5	-81.5
N_{oc}	Config 1,2	dBm/120 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
- Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.1.1-1.
- Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.
- Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
- Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband
- Note 12: AoA1 for TRP1 and AoA2 for TRP2

Table A.7.5.5.10.1-4: Void

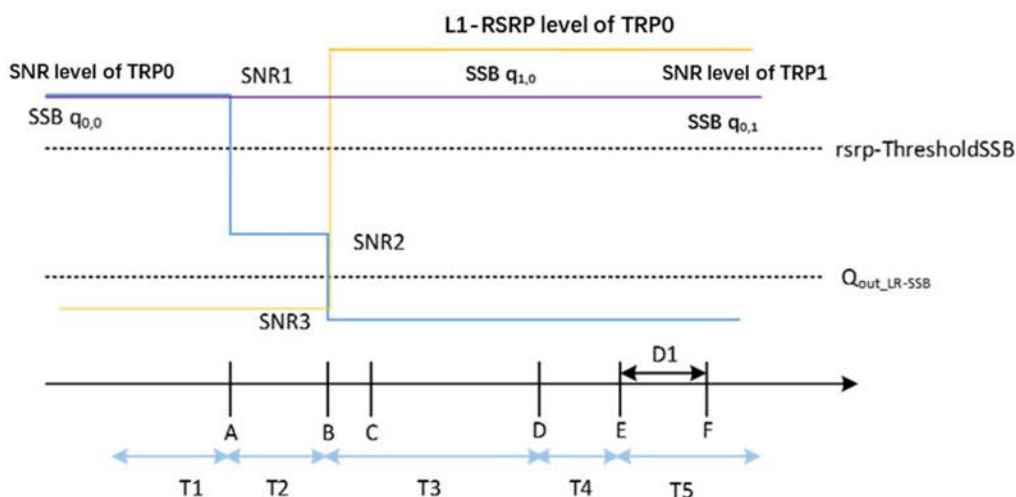


Figure A.7.5.5.10.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.7.5.5.10.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1 for TRP0 and TRP1.

During the period from time point A to time point B the UE shall transmit uplink signal for TRP0 and TRP1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3, T4, T5, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission for TRP1.

During T3 the UE shall detect beam failure and initiate link recovery for TRP0. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set $q_{1,0}$.

No later than time point F occurring no later than $D1 = 960 + 10$ ms after the start of T5, the UE shall transmit PUCCH with LRR, followed by BFR MAC CE containing a beam associated with the candidate beam set $q_{1,0}$. The UE shall not transmit PUCCH with an LRR with the candidate beam set $q_{1,0}$ earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.11 Beam Failure Detection and Link Recovery Test for FR2-2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.7.5.5.11.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2-2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.11.1-1, A.7.5.5.11.1-2, and A.7.5.5.11.1-3 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.11.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.7.5.5.11.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.7.5.5.11.1-1: Supported test configurations for FR2-2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	TDD duplex mode, 480 kHz SSB SCS, 400 MHz bandwidth
3	TDD duplex mode, 960 kHz SSB SCS, 400 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2-2	

Table A.7.5.5.11.1-2: General test parameters for FR2-2 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1,2,3		Cell 1	
RF Channel Number	1,2,3		1	
Duplex mode	1,2,3		TDD	
TDD Configuration	1,2,3		TDDConf.3.1	
BW _{channel}	1		100: N _{RB,c} = 66	
	2		400: N _{RB,c} = 66	
	3		400: N _{RB,c} = 33	
Data RBs allocated	1		66	
	2		66	
	3		33	
PDSCH/PDCCH subcarrier spacing	1	kHz	120	

	2	kHz	480	
	3	kHz	960	
DL initial BWP configuration	1,2,3		DLBWP.0.1	
DL dedicated BWP configuration	1,2,3		DLBWP.1.1	
UL initial BWP configuration	1,2,3		ULBWP.0.1	
UL dedicated BWP configuration	1,2,3		ULBWP.1.1	
PDSCH Reference Channel	1,2,3		SR.3.2 TDD	
RMSI CORESET Reference Channel	1,2,3		CR.3.1 TDD	
Dedicated CORESET Reference Channel	1,2,3		CCR.3.1 TDD	
OCNG parameters	1,2,3		OP.1	
CP length	1,2,3		Normal	
PDSCH/PDCCH TCI state	1,2,3		TCI.State.0	
CSI-RS for tracking	1,2,3		TRS.2.1 TDD	
SSB Configuration	1,2,3		SSB.1 FR2	
SMTC Configuration	1,2,3		SMTC.3	
PRACH Configuration	1,2,3		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration	1,2,3		OFF	
CSI-RS configuration for BFD/CBD/RLM	1,2,3		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)	1,2,3		0	
CSI-RS index assigned as CBD RS (q_1)	1,2,3		1	
CSI-RS index assigned as RLM RS	1,2,3		0,1	
Beam failure detection transmission parameters	DCI format	1,2,3	1-0	
	Number of Control OFDM symbols	1,2,3	2	
	Aggregation level	1,2,3	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1,2,3	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1,2,3	dB	0
	DMRS precoder granularity	1,2,3		REG bundle size
	REG bundle size	1,2,3		6
Gap pattern ID	1,2,3		N/A	
rlmInSyncOutOfSyncThreshold	1,2,3		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1,2,3	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS	1,2,3		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1,2,3		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1,2,3		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1,2,3		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType	1,2,3		periodic	
reportQuantity	1,2,3		cri-RI-PMI-CQI	
CSI reporting periodicity	1,2,3	slot	40	
CSI reporting offset	1,2,3	slot	4	
T310	1,2,3	ms	1000	
N310	1,2,3		2	
T1	1,2,3	s	1	The UE shall be fully synchronized to cell 1 during T1

T2	1,2,3	s	1.17	
T3	1,2,3	s	0.9	
T4	1,2,3	s	0	
T5	1,2,3	s	0.31	
D1	1,2,3	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.11.1-3: Cell specific test parameters for FR2-2 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumptpion for UE beams ^{Note 10}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q ₀	Config 1,2,3	dB	5 ^{Note 11}	-3 ^{Note 11}	-12	-12	-12
SNR_CSI-RS of set q ₁	Config 1,2,3	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q ₁	Config 1,2,3	dBm/S CS	-104.5	-104.5	-84.5	-84.5	-84.5
N _{oc}	Config 1,2,3	dBm/12 0 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Void							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.11.1-1.							
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.							
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.							
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband							

Table A.7.5.5.11.1-4: Void

Table A.7.5.5.11.1-5: Void

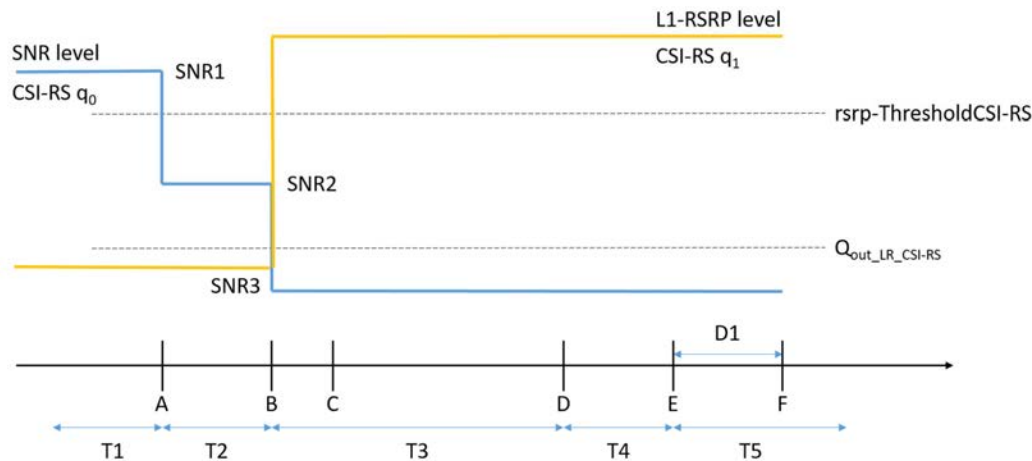


Figure A.7.5.5.11.1-1: SNR and L1-RSRP variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

A.7.5.5.11.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260+10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.12 Beam Failure Detection and Link Recovery Test for FR2-2 PCell configured with CSI-RS-based BFD and LR in DRX mode

A.7.5.5.12.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2-2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.7.5.5.12.1-1, A.7.5.5.12.1-2, A.7.5.5.12.1-3, and A.7.5.5.12.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.12.1-1 shows the variation of the downlink SNR

of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.7.5.5.12.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.7.5.5.12.1-1: Supported test configurations for FR2-2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
2	TDD duplex mode, 480 kHz SSB SCS, 400 MHz bandwidth
3	TDD duplex mode, 960 kHz SSB SCS, 400 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR2-2	

Table A.7.5.5.12.1-2: General test parameters for FR2-2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1,2,3		Cell 1	
RF Channel Number	1,2,3		1	
Duplex mode	1,2,3		TDD	
TDD Configuration	1,2,3		TDDConf.3.1	
BW _{channel}	1		100: N _{RB,c} = 66	
	2		400: N _{RB,c} = 66	
	3		400: N _{RB,c} = 33	
Data RBs allocated	1		66	
	2		66	
	3		33	
PDSCH/PDCCH subcarrier spacing	1	kHz	120	
	2	kHz	480	
	3	kHz	960	
DL initial BWP configuration	1,2,3		DLBWP.0.1	
DL dedicated BWP configuration	1,2,3		DLBWP.1.1	
UL initial BWP configuration	1,2,3		ULBWP.0.1	
UL dedicated BWP configuration	1,2,3		ULBWP.1.1	
PDSCH Reference Channel	1,2,3		SR.3.2 TDD	
RMSI CORESET Reference Channel	1,2,3		CR.3.1 TDD	
Dedicated CORESET Reference Channel	1,2,3		CCR.3.1 TDD	
OCNG parameters	1,2,3		OP.1	
CP length	1,2,3		Normal	
PDSCH/PDCCH TCI state	1,2,3		TCI.State.0	
CSI-RS for tracking	1,2,3		TRS.2.1 TDD	
SSB Configuration	1,2,3		SSB.1 FR2	
SMTC Configuration	1,2,3		SMTC.3	
PRACH Configuration	1,2,3		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration	1,2,3		DRX.3	A.3.3.3
CSI-RS configuration for BFD/CBD/RLM	1,2,3		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)	1,2,3		0	
CSI-RS index assigned as CBD RS (q_1)	1,2,3		1	
CSI-RS index assigned as RLM RS	1,2,3		0,1	

Beam failure detection transmission parameters	DCI format	1,2,3		1-0	
	Number of Control OFDM symbols	1,2,3		2	
	Aggregation level	1,2,3	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1,2,3	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1,2,3	dB	0	
	DMRS precoder granularity	1,2,3		REG bundle size	
	REG bundle size	1,2,3		6	
Gap pattern ID		1,2,3		N/A	
rminSyncOutOfSyncThreshold		1,2,3		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1,2,3	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS		1,2,3		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1,2,3		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1,2,3		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1,2,3		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType		1,2,3		periodic	
reportQuantity		1,2,3		cri-RI-PMI-CQI	
CSI reporting periodicity		1,2,3	slot	40	
CSI reporting offset		1,2,3	slot	4	
T310		1,2,3	ms	1000	
N310		1,2,3		2	
T1		1,2,3	s	1	The UE shall be fully synchronized to cell 1 during T1
T2		1,2,3	s	5.43	
T3		1,2,3	s	5.16	
T4		1,2,3	s	0	
T5		1,2,3	s	0.31	
D1		1,2,3	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.7.5.5.12.1-3: Cell specific test parameters for FR2-2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					

EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1,2,3	dB	5 Note 11	-3 Note 11	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1,2,3	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1,2,3	dBm/S CS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1,2,3	dBm/12 0 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Void						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.12.1-1.						
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.						
Note 10:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.						
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband						

Table A.7.5.5.12.1-4: Void

Table A.7.5.5.12.1-5: Void

Table A.7.5.5.12.1-6: Void

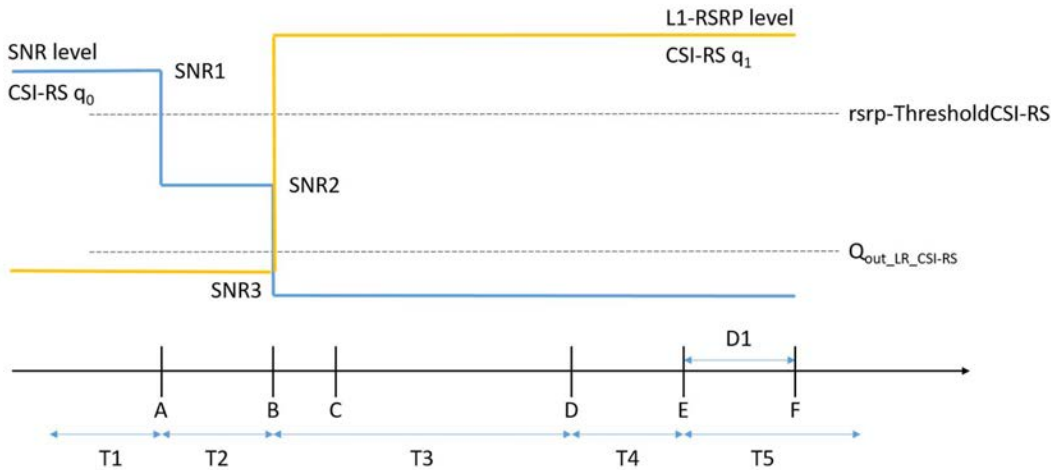


Figure A.7.5.5.12.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.7.5.5.12.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.5.13 Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2-2 PCell configured with SSB-based BFD and LR in non-DRX mode

A.7.5.5.13.1 Test Purpose and Environment

The purpose is to test scheduling availability restrictions when the UE is performing beam failure detection or when the UE is performing L1-RSRP measurement for candidate beam detection, when no DRX is used. This test will verify the scheduling availability restriction requirements in clause 8.5.7 and 8.5.8.

The test parameters are given in Tables A.7.5.5.13.1-1, A.7.5.5.13.1-2 and A.7.5.5.13.1-3 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.7.5.5.13.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.7.5.5.13.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. This test will focus on the scheduling availability during beam failure detection) and candidate beam detection. In the test, DRX configuration is not enabled. Test is to test the scheduling availability restriction of UE performing beam failure detection and candidate beam detection when SSB RS configured for Beam failure detection and candidate beam detection. During the test the UE is scheduled to transmit continuously in UL.

Table A.7.5.5.13.1-1: Supported test configurations for FR2-2 PCell

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.5.13.1-2: General test parameters for FR2-2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1-2		Cell 1	
RF Channel Number	1-2		1	
Duplex mode	1-2		TDD	
TDD Configuration	1-2		TDDConf.3.1	
BW_{channel}	1-2		100: $N_{RB,c} = 66$	
Data RBs allocated	1-2		66	
PDSCH/PDCCH subcarrier spacing	1-2	kHz	120	

DL initial BWP configuration		1-2		DLBWP.0.1	
DL dedicated BWP configuration		1-2		DLBWP.1.1	
UL initial BWP configuration		1-2		ULBWP.0.1	
UL dedicated BWP configuration		1-2		ULBWP.1.1	
PDSCH Reference Channel		1		SR.3.2 TDD	
		2		SR.3.3 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	
		2		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
		2		CCR.3.7 TDD	
OCNG parameters		1-2		OP.1	
CP length		1-2		Normal	
PDSCH/PDCCH TCI state		1-2		TCI.State.0	
CSI-RS for tracking		1-2		TRS.2.1 TDD	
SSB Configuration		1		SSB.1 FR2	
		2		SSB.2 FR2	
SMTC Configuration		1-2		SMTC.1	
PRACH Configuration		1-2		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration		1-2		OFF	
SSB index assigned as BFD RS (q_0)		1-2		0	
SSB index assigned as CBD RS (q_1)		1-2		1	
Beam failure detection transmission parameters	DCI format	1-2		1-0	
	Number of Control OFDM symbols	1-2		2	
	Aggregation level	1-2	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0	
	DMRS precoder granularity	1-2		REG bundle size	
	REG bundle size	1-2		6	
Gap pattern ID		1-2		N/A	
rlmInSyncOutOfSyncThreshold		1-2		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
		2		-92	
powerControlOffsetSS		1-2		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount		1-2		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer		1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting		1-2		CSI-RS.3.1 TDD	
reportConfigType		1-2		periodic	
reportQuantity		1-2		cri-RI-PMI-CQI	
CSI reporting periodicity		1-2	slot	40	
CSI reporting offset		1-2	slot	4	
T310		1-2	ms	1000	
N310		1-2		2	
T1		1-2	s	1	The UE shall be fully synchronized to cell 1 during T1

T2	1-2	s	2.6	
T3	1-2	s	1.64	
T4	1-2	s	0	
T5	1-2	s	1.01	
D1	1-2	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.7.5.5.13.1-3: Cell specific test parameters for FR2-2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA Setup			Setup1 defined in A.3.15.1				
Assumption for UE beams ^{Note 10}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q ₀	Config 1-2	dB	5 ^{Note 11}	-3 ^{Note 11}	-12	-12	-12
SNR_SSB of set q ₁	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of set q ₁	Config 1	dBm/S	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 2	CS	-101.5	-101.5	-81.5	-81.5	-81.5
N _{oc}	Config 1-2	dBm/12 0 kHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Void							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.13.1-1.							
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.							
Note 10: Information about types of UE beam given in B.2.1.3 and does not limit UE implementation or test system implementation							
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.							

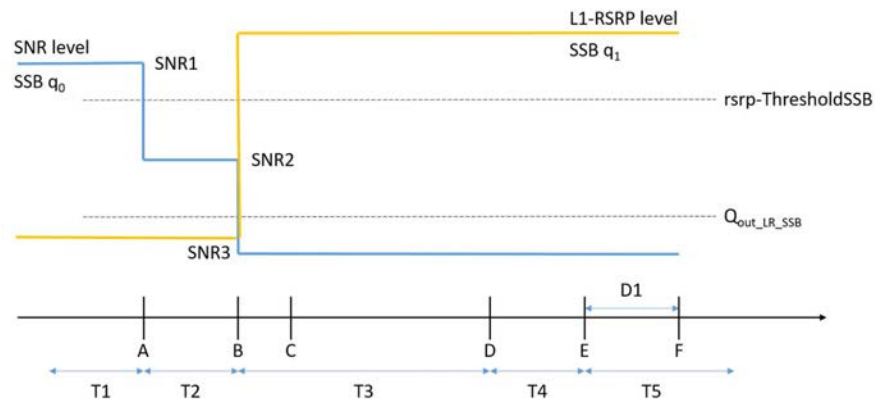


Figure A.7.5.5.13.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.7.5.5.13.2 Test Requirements

The UE behaviour during time duration T3 follows the requirements defined in clause 8.5.7.3:

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on BFD-RS symbols to be measured for beam failure detection.

The UE behaviour during time durations T4 and T5 follows the requirements defined in clause 8.5.8.3:

- The UE is not expected to transmit PUCCH/PUSCH or receive PDCCH/PDSCH on reference symbols to be measured for candidate beam detection.

A.7.5.6 Active BWP switch

A.7.5.6.1 DCI-based and Timer-based Active BWP Switch

A.7.5.6.1.1 NR FR2- NR FR2 DL active BWP switch of SCell with non-DRX in SA

A.7.5.6.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

The supported test configurations are shown in Table A.7.5.6.1.1.1-1 below. The test scenario comprises of one PCell (Cell 1) and one SCell (Cell 2) as given in Table A.7.5.6.1.1.1-2. NR Cell-specific parameters are specified in Table A.7.5.6.1.1.1-3 below. OTA related test parameters are shown in table A.7.5.6.1.1.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).

UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.

UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PSCell, BWP-0 in Cell 1 before starting the test.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PCell.

UE is configured with a *bwp-InactivityTimer* timer value for SCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for SCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in SCell's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PCell no later than the first UL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on SCell's BWP-2 no later than the first DL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay}$).

The starting time of PCell (Cell 1) interruption due to BWP switch on SCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on SCell(Cell 2).

During T3,

The time period T3 starts from the slot # j , where j is the first slot of the half subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell's DL slot ($j + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PCell at latest on the first UL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on SCell's BWP-1 no later than the first DL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay}$).

The starting time of PCell (Cell 1) interruption due to BWP switch of SCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The test equipment verifies that potential interruption to PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of SCell, respectively.

Table A.7.5.6.1.1.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD -TDD duplex mode
Note 1: Void	

Table A.7.5.6.1.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and SCell
<i>bwp-InactivityTimer</i>	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.7.5.6.1.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Cell 1	Cell2
Frequency Range		FR2	FR2
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
BW _{channel}		100 MHz: N _{RB,C} = 66	
Active BWP ID		0	0
Downlink initial BWP Configuration		DLBWP.0.2	
Uplink initial BWP Configuration		ULBWP.0.2	N.A.
Downlink active BWP-0 Configuration		DLBWP.0.2	N.A.
Downlink active BWP-1 Configuration		N.A.	DLBWP.1.1
Downlink active BWP-2 Configuration		N.A.	DLBWP.1.3
Uplink active BWP-0 Configuration		ULBWP.0.2	N.A.
Uplink active BWP-1 Configuration		N.A.	N.A.
Uplink active BWP-2 Configuration		N.A.	N.A.
PDSCH Reference measurement channel		SR.3.1 TDD	
TRS configuration		TRS.2.1 TDD	
TCI state		TCI.State.0	
RMSI CORESET parameters		CR.3.1 TDD	
Dedicated CORESET parameters		CCR.3.1 TDD	
OCNG Patterns		OP.1	
SSB Configuration		SSB.1 FR2	
SMTC Configuration		SMTC.1	
Correlation Matrix and Antenna Configuration		1x2 Low	
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			

EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation Condition		AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.5.6.1.1.1-4: OTA related test parameters for BWP switching test case

Parameter	Unit	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 defined in clause A.3.15.1	Setup 1 defined in clause A.3.15.1
Assumption for UE beams ^{Note 6}		Fine	Fine
N_{oc} ^{Note1}	dBm/15kHz	-112	-112
N_{oc} ^{Note1}	dBm/SCS	-103	-103
SS-RSRP ^{Note2}	dBm/SCS ^{Note3}	-85	-85
$\hat{E}_s / I_{ot}$	dB	18	18
I_o ^{Note4}	dBm/95.04 MHz ^{Note4}	-56	-56
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone. Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.			

A.7.5.6.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for SCell on PCell from the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK/NACK for SCell on PCell from the first UL slot that occurs after the beginning of DL slot $(j + T_{BWPswitchDelay} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T3, the start time of PCell interruption during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$, $(j + T_{BWPswitchDelay} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.7.5.6.1.2 NR FR1- NR FR2 DL active BWP switch of SCell with non-DRX in SA

A.7.5.6.1.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

The supported test configurations are shown in Table A.7.5.6.1.2.1-1 below. The test scenario comprises of one NR PCell (Cell 1) and one NR SCell (Cell 2). The general parameters are given in Table A.7.5.6.1.2.1-2. NR Cell-specific parameters are specified in Table A.7.5.6.1.2.1-3 below. OTA related test parameters are shown in table A.7.5.6.1.2.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).

UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.

UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PCell, BWP-0 in Cell 1 before starting the test.

UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 in SCell.

UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-0 in PCell.

UE is configured with a bwp-InactivityTimer timer value for SCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for SCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in SCell's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell's DL slot $(i + T_{BWPswitchDelay})$ as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell

on PCell no later than the first UL slot that occurs after the beginning of slot $(i + T_{BWPswitchDelay} + k1)$. The UE shall be continuously scheduled on SCell's BWP-2 no later than the first DL slot that occurs after the beginning of slot $(i + T_{BWPswitchDelay})$.

The starting time of PCell (Cell 1) interruption due to BWP switch on SCell shall occur within the BWP switch delay if the UE doesn't support per-FR gap, otherwise no interruption due to BWP switch on PCell is allowed.

During T2, the test equipment won't transmit DCI format for PDSCH reception on SCell (Cell 2).

During T3,

The time period T3 starts from the slot #j, where j is the first slot of the half subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell's DL slot $(j + T_{BWPswitchDelay})$ as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PCell at latest on the first UL slot that occurs after the beginning of slot $(j + T_{BWPswitchDelay} + k1)$. The UE shall be continuously scheduled on SCell's BWP-1 no later than the first DL slot that occurs after the beginning of slot $(j + T_{BWPswitchDelay})$.

The starting time of PCell (Cell 1) interruption due to BWP switch of SCell shall occur within the BWP switch delay if the UE doesn't support per-FR gap, otherwise no interruption due to BWP switch on PCell is allowed.

The test equipment verifies the DL BWP switch time in SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The test equipment verifies that potential interruption to PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of SCell, respectively.

Table A.7.5.6.1.2.1-1: DL BWP switch supported test configurations

Config	Description
1	PCell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode SCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	PCell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode SCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	PCell: NR 30 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode SCell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.6.1.2.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		2	Two NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and SCell
<i>bwp-InactivityTimer</i>	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	μs	3	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	0.2	

T2	s	0.2	
T3	s	0.2	

Table A.7.5.6.1.2.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1	Cell2
Frequency Range			FR1	FR2
Duplex mode	Config 1		FDD	TDD
	Config 2,3		TDD	
TDD configuration	Config 1		Not Applicable	TDDConf.3.1
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
BW _{channel}	Config 1,2	MHz	10 MHz: N _{RB,c} = 52	100 MHz: N _{RB,c} = 66
	Config 3		40 MHz: N _{RB,c} = 106	
Active BWP ID			0	1, 2
Downlink initial BWP Configuration			DLBWP.0.2	
Uplink initial BWP Configuration			ULBWP.0.2	N.A.
Downlink active BWP-0 Configuration			DLBWP.0.2	N.A.
Downlink active BWP-1 Configuration			N.A.	DLBWP.1.1
Downlink active BWP-2 Configuration			N.A.	DLBWP.1.3
Uplink active BWP-0 Configuration			ULBWP.0.2	N.A.
Uplink active BWP-1 Configuration			N.A.	N.A.
Uplink active BWP-2 Configuration			N.A.	N.A.
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.3.1 TDD
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET parameters	Config 1		CR.1.1 FDD	CR.3.1 TDD
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD	CCR.3.1 TDD
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
OCNG Patterns			OP.1	
SSB Configuration	Config 1,2		SSB.1 FR1	SSB.1 FR2
	Config 3		SSB.2 FR1	
TRS configuration	Config 1,2,3		-	TRS.2.1 TDD
TCI state	Config 1,2,3		TCI.State.0	TCI.State.0
SMTC Configuration			SMTC.1	
Correlation Matrix and Antenna Configuration			NA Link only, see clause A.3.7A	1x2 Low
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				

Propagation Condition		NA Link only, see clause A.3.7A	AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3:	SS-RSRP and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		

Table A.7.5.6.1.2.1-4: OTA related test parameters for BWP switching test case

Parameter	Unit	Cell 1	Cell 2
Angle of arrival configuration		-NA Link only, see clause A.3.7A	Setup 1 defined in clause A.3.15.1
Assumption for UE beams ^{Note 6}			Fine
N_{oc} ^{Note1}	dBm/15kHz		-112
N_{oc} ^{Note1}	dBm/SCS		-103
SS-RSRP ^{Note2}	dBm/SCS ^{Note3}		-85
$\hat{E}_s/I_{ot}$	dB		18
I_o ^{Note4}	dBm/95.04 MHz ^{Note4}		-56
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 2:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.		
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone		
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone.		
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.		

A.7.5.6.1.2.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(j + T_{BWPswitchDelay} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

If the UE doesn't support per-FR gap,

- During T1 and T3, the start time of SCell interruption during PCell active BWP switch shall not happen outside the BWP switch delay.

- The interruption of SCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.2.2.2.5.

Otherwise no interruption due to BWP switch on SCell is allowed.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after the beginning of DL slot ($i + T_{BWPswitchDelay} + k1$), ($j + T_{BWPswitchDelay} + k1$), then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.7.5.6.1.3 NR FR2 DL active BWP switch with non-DRX in SA

A.7.5.6.1.3.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6. Supported test configurations are shown in Table A.7.5.6.1.3.1-1.

The test scenario comprises of one cell (Cell 1) as given in Table A.7.5.6.1.3.1-2. Cell-specific parameters of NR PCell is specified in Table A.7.5.6.1.3.1-3 below. The OTA related test parameters for FR2 is shown in Table A.7.5.6.1.3.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
- UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell 1's slot # denoted i . The UE should switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell 1's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the Cell 1 no later than the first UL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on Cell 1's BWP-2 starting from the first DL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell 1.

During T3,

The time period T3 starts from the slot # j , where j is the first slot of the half subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell 1's DL slot ($j + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the Cell 1 at latest on the first UL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on Cell 1's BWP-1 starting from the first DL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

Table A.7.5.6.1.3.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	
Note 2: A UE which fulfils the requirements in test case A.7.5.6.1.1 or A.7.5.6.1.2 can skip the test cases in A.7.5.6.1.3.	

Table A.7.5.6.1.3.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
<i>bwp-InactivityTimer</i>	ms	[200]	
T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

Table A.7.5.6.1.3.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		100 MHz: N _{RB,c} = 66
Active BWP ID		1, 2
Initial DL BWP Configuration		DLBWP.0.2 ^{Note 2}
Active DL BWP-1 Configuration		DLBWP.1.1 ^{Note 2}
Active DL BWP-2 Configuration		DLBWP.1.3 ^{Note 2}
Initial UL BWP Configuration		ULBWP.0.2 ^{Note 2}
Active UL BWP-1 Configuration		ULBWP.1.1 ^{Note 2}
Active UL BWP-2 Configuration		ULBWP.1.3 ^{Note 2}
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State		TCI.State.0
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low

EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].		

Table A.7.5.6.1.3.1-4: OTA related test parameters for DL BWP switch in SA

Parameter	Unit	Cell 2
Angle of arrival configuration		Setup 1 defined in clause A.3.15.1
Assumption for UE beams ^{Note 6}		Fine
N_{oc} ^{Note 1}	dBm/15 kHz	-112
N_{oc} ^{Note 1}	dBm/SCS	-103
SS-RSRP ^{Note 2}	dBm/120 kHz ^{Note 3}	-85
$\hat{E}_s/I_{ot}$	dB	18
$\hat{E}_s/N_{oc}$ ^{Note 5}	dB	18
I_0 ^{Note 2}	dBm/95.04 MHz ^{Note 4}	-56
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 2: SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.		
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone		
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.		
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.		

A.7.5.6.1.3.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(j + T_{BWPswitchDelay} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$, $(j + T_{BWPswitchDelay} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.7.5.6.1.4 NR FR2-2- NR FR2-2 DL active BWP switch of SCell with non-DRX in SA

A.7.5.6.1.4.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

The supported test configurations are shown in Table A.7.5.6.1.4.1-1 below. The test scenario comprises of one PCell (Cell 1) and one SCell (Cell 2) as given in Table A.7.5.6.1.4.1-2. NR Cell-specific parameters are specified in Table A.7.5.6.1.4.1-3 below. OTA related test parameters are shown in table A.7.5.6.1.4.1-4 below.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).

UE is configured with 2 different UE-specific downlink bandwidth parts for SCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.

UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for PCell, BWP-0 in Cell 1 before starting the test.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PCell.

UE is configured with a *bwp-InactivityTimer* timer value for SCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for SCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in SCell's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell's DL slot $(i + T_{BWPswitchDelay})$ as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PCell no later than the first UL slot that occurs after the beginning of slot $(i + T_{BWPswitchDelay} + k1)$. The UE shall be continuously scheduled on SCell's BWP-2 no later than the first DL slot that occurs after the beginning of slot $(i + T_{BWPswitchDelay})$.

The starting time of PCell (Cell 1) interruption due to BWP switch on SCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on SCell(Cell 2).

During T3,

The time period T3 starts from the slot # j , where j is the first slot of the half subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of SCell's DL slot ($j + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell on PCell at latest on the first UL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on SCell's BWP-1 no later than the first DL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay}$).

The starting time of PCell (Cell 1) interruption due to BWP switch of SCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in SCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The test equipment verifies that potential interruption to PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of SCell, respectively.

Table A.7.5.6.1.4.1-1: DL BWP switch supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.6.1.4.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and SCell
<i>bwp-InactivityTimer</i>	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.7.5.6.1.4.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Config	Cell 1	Cell2
Frequency Range		1,2,3	FR2-2	FR2-2

Duplex mode		1,2,3	TDD	
TDD configuration		1	TDDConf.3.1	
		2	TBD	
		3	TBD	
BW _{channel}		1	100 MHz: N _{RB,c} = 66	
		2	400 MHz: N _{RB,c} = 66	
		3	400 MHz: N _{RB,c} = 33	
Active BWP ID		1,2,3	0	0
Downlink initial BWP Configuration		1,2,3	DLBWP.0.2	
Uplink initial BWP Configuration		1,2,3	ULBWP.0.2	N.A.
Downlink active BWP-0 Configuration		1,2,3	DLBWP.0.2	N.A.
Downlink active BWP-1 Configuration		1,2,3	N.A.	DLBWP.1.1
Downlink active BWP-2 Configuration		1,2,3	N.A.	DLBWP.1.3
Uplink active BWP-0 Configuration		1,2,3	ULBWP.0.2	N.A.
Uplink active BWP-1 Configuration		1,2,3	N.A.	N.A.
Uplink active BWP-2 Configuration		1,2,3	N.A.	N.A.
PDSCH Reference measurement channel		1	SR.3.1 TDD	
		2	TBD	
		3	TBD	
TRS configuration		1	TRS.2.1 TDD	
		2	TBD	
		3	TBD	
TCI state		1,2,3	TCI.State.0	
RMSI CORESET parameters		1	CR.3.1 TDD	
		2	TBD	
		3	TBD	
Dedicated CORESET parameters		1	CCR.3.1 TDD	
		2	TBD	
		3	TBD	
OCNG Patterns		1,2,3	OP.1	
SSB Configuration		1	SSB.1 FR2	
		2	TBD	
		3	TBD	
SMTC Configuration		1,2,3	SMTC.1	
Correlation Matrix and Antenna Configuration			1x2 Low	
EPRE ratio of PSS to SSS	dB		0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				

EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation Condition			AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.7.5.6.1.4.1-4: OTA related test parameters for BWP switching test case

Parameter	Unit	Config	Cell 1	Cell 2
Angle of arrival configuration		1,2,3	Setup 1 defined in clause A.3.15.1	Setup 1 defined in clause A.3.15.1
Assumption for UE beams ^{Note 6}		1,2,3	Fine	Fine
N_{oc} ^{Note1}	dBm/15kHz		-112	-112
N_{oc} ^{Note1}	dBm/SCS	1	-103	-103
		2	-97	-97
		3	-94	-94
SS-RSRP ^{Note2}	dBm/SCS ^{Note3}	1	-85	-85
		2	-79	-79
		3	-76	-76
$\hat{E}_s/I_{ot}$	dB		18	18
I_o ^{Note4}	dBm/95.04 MHz ^{Note4}	1	-56	-56
	dBm/380.16 MHz ^{Note4}	2,3	-50.0	-50.0
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone. Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				

A.7.5.6.1.4.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for SCell on PCell from the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK/NACK for SCell on PCell from the first UL slot that occurs after the beginning of DL slot $(j + T_{BWPswitchDelay} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T3, the start time of PCell interruption during SCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$, $(j + T_{BWPswitchDelay} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.7.5.6.2 RRC-based Active BWP Switch

A.7.5.6.2.1 NR FR2 DL active BWP switch of PCell with non-DRX in SA

A.7.5.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.3. Supported test configurations are shown in Table A.7.5.6.2.1.1-1.

The test scenario comprises of one PCell (Cell 1) as given in Table A.7.5.6.2.1.1-2. Cell-specific parameters of PCell are specified in Table A.7.5.6.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted i . The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to completely receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ as defined in clause 8.6.3 and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot $i +$

$\frac{T_{\text{RRCPprocessingDelay}} + T_{\text{BWPs switchDelayRRC}}}{\text{NR Slot length}} + k1$. The UE shall be continuously scheduled on PCell's BWP-1 starting from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCPprocessingDelay}} + T_{\text{BWPs switchDelayRRC}}}{\text{NR Slot length}}$.

$T_{\text{RRCPprocessingDelay}}$ and $T_{\text{BWPs switchDelayRRC}}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in PCell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.7.5.6.2.1.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.6.2.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
T1	s	0.2	

Table A.7.5.6.2.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR2
Duplex mode			TDD
TDD configuration			TDDConf.3.1
BW _{channel}			100 MHz: N _{RB,c} = 66
Active BWP ID			1
Initial DL BWP Configuration			DLBWP.0.2
Initial UL BWP Configuration			ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration		DLBWP.1.3
	Active UL BWP-1 Configuration		ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration		DLBWP.1.1
	Active UL BWP-1 Configuration		ULBWP.1.1
'PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			

EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].		

Table A.7.5.6.2.1.1-4: OTA related test parameters for BWP switching test case

Parameter		Unit	Cell 1
Angle of arrival configuration			Setup 1 according to table A.3.15
Assumption for UE beams ^{Note 5}			Fine
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/15kHz	-112
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/SCS	-103
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
SS-RSRP ^{Note2}	NR_TDD_FR2_A	dBm/SCS ^{Note3}	-85
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s/I_{ot}$		dB	18
I_o ^{Note2}	NR_TDD_FR2_A	dBm/95.04 MHz ^{Note4}	-56
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.6.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell from the first DL slot that occurs after the beginning of slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length} + k1$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.6.2.2 NR FR2-2 DL active BWP switch of PCell with non-DRX in SA

A.7.5.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.3. Supported test configurations are shown in Table A.7.5.6.2.2.1-1.

The test scenario comprises of one PCell (Cell 1) as given in Table A.7.5.6.2.2.1-2. Cell-specific parameters of PCell are specified in Table A.7.5.6.2.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted i . The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to completely receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ as defined in clause 8.6.3 and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k1$. The UE shall be continuously scheduled on PCell's BWP-1 starting from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$.

$T_{\text{RRCprocessingDelay}}$ and $T_{\text{BWPswitchDelayRRC}}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in PCell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.7.5.6.2.2.1-1: DL BWP switch supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.6.2.2.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
T1	s	[0.2]	

Table A.7.5.6.2.2.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Config	Cell 1	Cell2
Frequency Range		1,2,3	FR2-2	FR2-2
Duplex mode		1,2,3	TDD	
TDD configuration		1	TDDConf.3.1	
		2	TBD	
		3	TBD	
BW _{channel}		1	100 MHz: N _{RB,c} = 66	
		2	400 MHz: N _{RB,c} = 66	
		3	400 MHz: N _{RB,c} = 33	
Active BWP ID		1,2,3	0	0
Downlink initial BWP Configuration		1,2,3	DLBWP.0.2	
Uplink initial BWP Configuration		1,2,3	ULBWP.0.2	N.A.
Downlink active BWP-0 Configuration		1,2,3	DLBWP.0.2	N.A.
Downlink active BWP-1 Configuration		1,2,3	N.A.	DLBWP.1.1

Downlink active BWP-2 Configuration		1,2,3	N.A.	DLBWP.1.3
Uplink active BWP-0 Configuration		1,2,3	ULBWP.0.2	N.A.
Uplink active BWP-1 Configuration		1,2,3	N.A.	N.A.
Uplink active BWP-2 Configuration		1,2,3	N.A.	N.A.
PDSCH Reference measurement channel		1	SR.3.1 TDD	
		2	TBD	
		3	TBD	
TRS configuration		1	TRS.2.1 TDD	
		2	TBD	
		3	TBD	
TCI state		1,2,3	TCI.State.0	
RMSI CORESET parameters		1	CR.3.1 TDD	
		2	TBD	
		3	TBD	
Dedicated CORESET parameters		1	CCR.3.1 TDD	
		2	TBD	
		3	TBD	
OCNG Patterns		1,2,3	OP.1	
SSB Configuration		1	SSB.1 FR2	
		2	TBD	
		3	TBD	
SMTc Configuration		1,2,3	SMTc.1	
Correlation Matrix and Antenna Configuration			1x2 Low	
EPRE ratio of PSS to SSS	dB		0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation Condition			AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.7.5.6.2.2.1-4: OTA related test parameters for BWP switching test case

Parameter	Unit	Config	Cell 1	Cell 2
Angle of arrival configuration		1,2,3	Setup 1 defined in clause A.3.15.1	Setup 1 defined in clause A.3.15.1

Assumption for UE beams ^{Note 6}		1,2,3	Fine	Fine
N_{oc} ^{Note1}	dBm/15kHz		-112	-112
N_{oc} ^{Note1}	dBm/SCS	1	-103	-103
		2	-97	-97
		3	-94	-94
SS-RSRP ^{Note2}	dBm/SCS ^{Note3}	1	-85	-85
		2	-79	-79
		3	-76	-76
$\hat{E}_s/I_{ot}$	dB		18	18
I_o ^{Note4}	dBm/95.04 MHz ^{Note4}	1	-56	-56
	dBm/380.16 MHz ^{Note4}	2,3	-50.0	-50.0
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone. Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				

A.7.5.6.2.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell from the first DL slot that occurs after the beginning of slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length} + k1$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.6.3 Simultaneous DCI-based and Timer-based Active BWP Switch on multiple CCs

A.7.5.6.3.1 Active BWP switch on multiple SCells with non-DRX in SA

A.7.5.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify fulfillment of DL BWP switch delay requirement defined in clauses 8.6.2A.1 and 8.6.2B.1, and interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

The supported test configurations are shown in Table A.7.5.6.3.1.1-1 below. The test scenario comprises one PCell (Cell 1) and two SCells (Cell 2 and Cell 3) as given in Table A.7.5.6.3.1.1-2. NR cell-specific parameters are provided in Table A.7.5.6.3.1.1-3, and OTA related test parameters in Table A.7.5.6.3.1.1-4 below.

The test consists of three consecutive time periods with durations T1, T2 and T3, respectively.

PDCCHs indicating new transmissions shall be transmitted in PCell, SCell1 and SCell2 throughout time periods T1 and T3 to ensure that UE sends ACK/NACKs for PDSCH reception in PCell, SCell1 and SCell2. During T2, there shall be scheduling on PDSCH in PCell only.

Before the test starts,

UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (SCell1) on radio channel 2 (SCC1), and Cell 3 (SCell2) on radio channel 3 (SCC2).

UE is configured with a single UE-specific downlink bandwidth part, BWP-0, for Cell 1 (PCell). BWP-0 includes the bandwidth of the initial DL BWP and SSB.

UE is configured with two different UE-specific downlink bandwidth parts, BWP-1 and BWP-2, for Cell 2 (SCell1). BWP-1 and BWP-2 include the bandwidth of the initial DL BWP and SSB.

UE is configured with two different UE-specific downlink bandwidth parts, BWP-3 and BWP-4, for Cell 3 (SCell2). BWP-3 and BWP-4 include the bandwidth of the initial DL BWP and SSB.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in PCell.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in SCell1.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-3 in SCell2.

UE is configured with a *bwp-InactivityTimer* timer value for SCell1 and SCell2, respectively.

All cells have constant signal levels throughout the test.

Time period T1 starts when the UE simultaneously receives DCI format 1_1 commands for DL BWP switch in SCell1 and SCell2, respectively, in a slot # denoted m . The UE shall switch its SCell1 bandwidth part from BWP-1 to BWP-2, and its SCell2 bandwidth part from BWP-3 to BWP-4. The UE shall be able to receive PDSCH in SCell1 and SCell2 starting from the first DL slot that occurs after slot $(m + T_{MultipleBWPswitchDelay})$ as defined in clause 8.6.2A.1, and to transmit ACK/NACKs in SCell1 and SCell2 from the first UL slot that occurs after $(m + T_{BWPswitchDelay} + k1)$ where $k1$ is specified in [7]. The UE shall be continuously scheduled in SCell1 BWP-2 and SCell2 BWP-4 no later than in the first DL slot that occurs after slot $(m + T_{MultipleBWPswitchDelay})$. The starting time of any interruption on PCell due to DL BWP switching of SCell1 and SCell2 shall occur within the BWP switching delay. The length of any interruption on PCell due to DL BWP switching of SCell1 and SCell2 shall fulfill requirements in clause 8.2.2.2.5.

Time period T2 starts when the test equipment ceases to schedule the UE on PDSCH in SCell1 and SCell2, thereby causing the *bwp-InactivityTimer* timers for SCell1 and SCell2 to be running until expiry.

Time period T3 starts at the beginning of the first DL half-subframe immediately after the earliest of the *bwp-InactivityTimer* timers expires, in a slot # denoted n . The UE shall switch its SCell1 bandwidth part from BWP-2 to BWP-1, and its SCell2 bandwidth part from BWP-4 to BWP-3. The UE shall be able to receive PDSCH in SCell1 and SCell2 starting from the first DL slot that occurs after slot $(n + T_{MultipleBWPswitchDelay})$ as defined in clause 8.6.2B.1, and to transmit ACK/NACKs in SCell1 and SCell2 from the first UL slot that occurs after slot $(n + T_{MultipleBWPswitchDelay} + k1)$. The UE shall be continuously scheduled in SCell1 BWP-1 and SCell2 BWP-3 no later than in the first DL slot that occurs after slot $(n + T_{MultipleBWPswitchDelay})$. The starting time of any interruption on PCell due to DL BWP switching of SCell1 and SCell2 shall occur within the BWP switching delay. The length of any interruption on PCell due to DL BWP switching of SCell1 and SCell2 shall fulfill requirements in clause 8.2.2.2.5.

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch commands are received or *bwp-InactivityTimer* timers expire until ACK/NACKs are sent in SCell1 and SCell2, respectively.

The test equipment verifies that potential interruptions of PCell due to DL BWP switching on SCell1 and SCell2 are carried out within the correct time span, and are within the correct length, by monitoring ACK/NACKs sent in PCell for PCell.

Table A.7.5.6.3.1.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD -TDD duplex mode

Table A.7.5.6.3.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2, 3	Three NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell1		Cell 2	SCell1 on RF channel number 2.
Active SCell2		Cell 3	SCell2 on RF channel number 3.
CP length		Normal	
DRX		OFF	
<i>sCellDeactivationTimer</i>	ms	-	Same value applies for SCell1 and SCell2. The value infinity is applied.
<i>bwp-InactivityTimer</i>	ms	200	Same value applies for SCell1 and SCell2.
Cell2 timing offset to Cell1	μs	0	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
Cell3 timing offset to Cell1	μs	0	
T1	s	0.2	During T1, DCI-based simultaneous BWP switching of SCell1 and SCell2 is carried out.
T2	s	0.2	During T2 bwp-InactivityTimer timers shall run to expiry.
T3	s	0.2	During T3, timer-based simultaneous BWP switching of SCell1 and SCell2 is carried out.

Table A.7.5.6.3.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Cell 1	Cell 2	Cell 3
Frequency Range		FR2		
NR RF channel		1	2	3
Duplex mode		TDD		
TDD configuration		TDDConf.3.1		
BW _{channel}	MHz	100: N _{RB,C} = 66		
Active Downlink BWP ID		0	1, 2	3, 4
Downlink initial BWP Configuration		DLBWP.0.2	DLBWP.0.2	DLBWP.0.2
Uplink initial BWP Configuration		ULBWP.0.2	ULBWP.0.2	ULBWP.0.2
Downlink active BWP-0 Configuration		DLBWP.1.1	-	-
Downlink active BWP-1 Configuration		-	DLBWP.1.1	-
Downlink active BWP-2 Configuration		-	DLBWP.1.3	-
Downlink active BWP-3 Configuration		-	-	DLBWP.1.1
Downlink active BWP-4 Configuration		-	-	DLBWP.1.3
Uplink active BWP-0 Configuration		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD		
TRS configuration		TRS.2.1 TDD		
TCI state		TCI.State.0		

RMSI CORESET parameters		CR.3.1 TDD		
Dedicated CORESET parameters		CCR.3.1 TDD		
OCNG Patterns		OP.1		
SSB Configuration		SSB.3 FR2		
SMTC Configuration		SMTC.1		
EPRE ratio of PSS to SSS	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS ^{Note1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note1}				
Propagation Condition		AWGN	AWGN	AWGN
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low
Note 1: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.7.5.6.3.1.1-4: OTA related test parameters for BWP switching test case

Parameter	Unit	Cell 1	Cell 2	Cell 3
Angle of arrival configuration		Setup 1 defined in clause A.3.15.1		
Assumption for UE beams ^{Note4}		Fine	Fine	Fine
N_{oc} ^{Note1}	dBm/15kHz	-111.7	-111.7	-111.7
N_{oc} ^{Note1}	dBm/SCS	[102.7	-102.7	-102.7
$\hat{E}_s/N_{oc}$	dB	7	7	7
SSB-RP ^{Note2}	dBm/SCS	-95.7	-95.7	-95.7
$\hat{E}_s/I_{ot}$	dB	7	7	7
I_o ^{Note3}	dBm/95.04 MHz	-65.9	-65.9	-65.9
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB-RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 4: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				

A.7.5.6.3.1.2 Test Requirements

During T1, the UE shall start to send ACK/NACKs in SCell1 and SCell2 from the first UL slot that occurs after the beginning of DL slot $(m + T_{MultipleBWPswitchDelay} + k1)$.

During T3, the UE shall start to send ACK/NACKs in SCell1 and SCell2 from the first UL slot that occurs after the beginning of DL slot $(n + T_{MultipleBWPswitchDelay} + k1)$.

During T1 and T3, the start of any interruption on PCell due to active BWP switching on SCell1 and SCell2 shall not happen outside the BWP switching delay $T_{MultipleBWPswitchDelay}$, and the length of any interruption shall not exceed the length specified in clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed active BWP switch delays in SCell1 and SCell2 to be considered correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.6.4 SCell dormancy switch

A.7.5.6.4.1 NR FR2 PCell SCell dormancy switch of single FR2 SCell inside active time

A.7.5.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the Dormant SCell BWP switch delay requirements are within the requirements stated in section 8.6 for UE configured with a single downlink SCell, when the dormancy indication is received in any of the first 3 OFDM symbols or is received after the first 3 OFDM symbols.

The Supported test configurations are given in Table A.7.5.6.4.1.1-1. The test parameters are given in Tables A.7.5.6.4.1.1-2 and cell-specific parameters in A.7.5.6.4.1.1-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A6 is used. The test consists of four successive time periods, with duration of T1, T2, T3 and T4, respectively. There are two carriers both in FR2, with one cell on the PCC and 2 cells on SCC. Cell 1, Cell 2 and Cell 3 operate in either FDD or TDD duplex mode according to test configuration. All cells have constant signal levels throughout the test. Before the test starts the UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) with configured and activated SCell (SCell1) on radio channel 2 (SCC1). The UE is not aware of Cell 3 on radio channel 2 (SCC1). The UE is reporting CSI and shall not report CQI index 0 (out-of-range) in the available uplink resources to report CQI for the SCell. The UE shall be continuously scheduled in the PCell throughout the whole test.

The UE receives a DCI-based BWP switch command by which the SCell1 (Cell 2) is requested to switch the active BWP to the dormant BWP.

The point in time at which the DCI message is received at the UE antenna connector, in a subframe # denoted n , defines the start of time period T1. The UE shall accomplish the BWP switch to the dormant BWP latest in subframe $(n + T_{BWPswitchDelay} + X)$. The UE shall continue to report valid CQI if the UE has available uplink resources to report CQI for the dormant SCell. The UE shall continue to report L1-RSRP if the UE has available uplink resources to report L1-RSRP for the Dormant SCell. Any PCell interruption due to BWP switch on the SCell shall occur in the subframes n to $(n + T_{BWPswitchDelay} + X)$.

Time T2 start at $T1 + (T_{BWPswitchDelay} + X)$. During T2 the UE shall continue to measure and report CQI and L1-RSRP in the available uplink resources to report CQI and L1-RSRP for the SCell.

Time T3 starts at $T2 + 500\text{ms}$. During T3 the UE shall continue to measure and report CQI and L1-RSRP in the available uplink resources to report CQI and L1-RSRP for the SCell.

Starting at $T4 = T3 + 500\text{ms}$, Cell 3 becomes detectable. During T3 the UE shall continue to measure and report CQI and L1-RSRP in the available uplink resources to report CQI and L1-RSRP for the SCell. The UE shall send one Event A6 triggered measurement report, with a measurement reporting delay less than 1000 ms from the beginning of time period T4. The UE is not required to read the neighbour cell SSB index in this test.

At time T5 starting at $T4 + 1500\text{ms}$ a DCI-based BWP switch command by which the SCell1 (Cell 2) is requested to switch the active BWP to the non-dormant BWP.

The point in time at which the DCI message is received at the UE antenna connector, in a subframe # denoted n , defines the start of time period T6. The UE shall accomplish the BWP switch to the non-dormant BWP latest in subframe $(n + T_{\text{BWPswitchDelay}} + X)$. The UE shall continue to report valid CQI if the UE has available uplink resources to report CQI for the non-dormant SCell. The UE shall continue to report L1-RSRP if the UE has available uplink resources to report L1-RSRP for the non-dormant SCell. Any PCell interruption due to BWP switch on the SCell shall occur in the subframes n to $(n + T_{\text{BWPswitchDelay}} + X)$.

During T2, T3 and T4 the total rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from CQI measurements and RRM measurements, clause 8.2.2.2.12.3, on dormant SCells, shall not exceed [0.5]%.

During T2, T3 and T4 the total rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from L1-RSRP measurements and RRM measurements, clause 8.2.2.2.12.x, on dormant SCells, shall not exceed [0.5]%.

During T2, T3 and T4 the total rate of ACK/NACK feedback loss on any non-dormant serving cell resulting from RRM measurements and RRM measurements, clause 8.2.2.2.12.3, on dormant SCells, shall not exceed [0.5]%.

During T1, T2, T3, T4, T5 and T6, the UE shall be continuously scheduled in the SCell1.

Table A.7.5.6.4.1.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.6.4.1.1-2: General test parameters for dormancy SCell in NR SA with PCell and SCell in FR2

Parameter	Unit	Test configur ation	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
PCell		1	Cell 1				
SCell		1	Cell 2				
Neighbour cell		1	Cell 3				Cell to be identified.
RF Channel Number		1	1				cell 1
RF Channel Number		1	2				Cell 2 and Cell 3
Measurement gap type		1					No measurement gaps configured
SSB configuration		1	SSB.1 FR2				for all cells
SMTC configuration		1	SMTC.1				all cells
CSI-RS parameters		1	CSI-RS.3.2 FDD				
CSI reporting periodicity, Non-dormant BWP	ms		2				
CSI reporting periodicity, Dormant BWP	ms		40				
Timing offset between the cells	ms		0				
Triggering DCI format			1 1	0 1	1 1	0 1	Triggering DCI format
OFDM symbol range in slot for transmission of DCI with dormancy indication			0 – 2		3 – 11		Test1 and Test3 are based on that triggering DCI is received within the first three OFDM symbols of a slot. Test2 and Test4 are based on that the triggering DCI is received after the first three OFDM symbols of a slot
A3-Offset	dB	1	-4.5				
CP length		1	Normal				
Hysteresis	dB	1	0				
Time To Trigger	s	1	0				

Filter coefficient		1	0	L3 filtering is not used
DRX		1	OFF	
T1	s	1	5	
T2	s	1	5	

Table A.7.5.6.4.1.1-3: NR Cell specific test parameters for dormancy SCell in NR SA with PCell and SCell in FR2

Parameter	Unit	Test configuration	Cell 1, Cell 2		Cell 3	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration, Test 1,2		1	CCR.3.1 TDD		CCR.3.1 TDD	
Dedicated CORESET RMC configuration, Test 3,4			CCR.3.2 TDD		CCR.3.1 TDD	
OCNG Patterns		1	OP.1		OP.1	
TRS configuration		1	TRS.2.1 TDD		N/A	
Downlink initial BWP configuration		1	DLBWP.0.1		N/A	
Uplink initial BWP configuration		1	ULBW P.0.1	N/A	N/A	
Downlink active non-dormant BWP configuration		1	N/A	DLBW P.1.2	N/A	
Downlink active dormant BWP configuration		1	DLBWP.1.2		N/A	
Active UL BWP configuration		1	ULBW P.1.1	N/A	N/A	
RLM-RS		1	CSI-RS		N/A	
EPRE ratio of PSS to SSS	dB		0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						

EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS ^{Note 4}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 4}						
N_{oc} ^{Note 2}	dBm/SCS	1	-98			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
$\hat{E}_s / I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
$\hat{E}_s / N_{oc}$	dB	1	4	4	-Infinity	4
SS-RSRP ^{Note 3}	dBm/SCS kHz	1	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1	-64.60	-62.25	--64.60	-62.25
Propagation Condition		1	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: OCNG shall be used such that the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols						

A.7.5.6.4.1.2 Test Requirements

During T1 the UE shall switch to the dormant BWP.

During T2, T3, T4 and T5 the UE shall not send ACK/NACK for the PDSCH data scheduled on the SCell.

During T2, T3, T4 and T5 the UE shall continue to send CSI reports for SCell1 with non-zero CQI index.

During T2, T3, T4 and T5 the UE shall continue to send L1-RSRP reports for SCell.

During T4 the UE shall send one Event A6 triggered measurement report, with a measurement reporting delay less than 1000 ms from the beginning of time period T4.

During T2, T3, T4 and T5, the missing ACK/NACK sent in PCell shall be less than 1.5% of the total number of the expected ACK/NACK.

During T6, the UE shall send ACK/NACK for the PDSCH data scheduled after subframe $(n + T_{BWPswitchDelay} + X)$ for the SCell1.

All of the above test requirements shall be fulfilled in order for the observed SCell1 BWP switch delays, Pcell interruption rate, correct CSI and L1-RSRP reporting and event triggeres reporting. The rate of correct observed SCell1 hibernation delay, activation delay and SCell1 deactivation delay during repeated tests shall be at least 90%.

A.7.5.6.4.2 NR FR1 PCell SCell dormancy switch of two FR2 SCells outside active time

A.7.5.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify fulfillment of SCell dormancy switching delay requirements in clause 8.6.2A when the UE is triggered to switch between non-dormancy and dormancy outside DRX active time. In the tested scenario, the UE is connected to PCell in FR1 and two SCells in FR2, and the SCells are switched from non-dormancy to dormancy, and vice versa, at a point in time before start of *onDuration*. The UE is configured to monitor PDCCH for DCI format 2_6 at *ps-Offset* before the start of *onDuration*. Two tests are specified, where a UE that only supports triggering within the first three OFDM symbols of a slot shall undergo Test1 only, and a UE that supports triggering also in remaining OFDM symbols of a slot shall undergo both Test1 and Test2. In the tested scenario, *ps-Offset* is selected to correspond to the dormancy switching time specified in clause 8.6.2A.

The supported test configurations are provided in Table A.7.5.6.4.2.1-1 below. General test parameters are provided in Table A.7.5.6.4.2.1-2, and cell-specific parameters are provided in Table A.7.5.6.4.2.1-3 below. OTA-related test parameters are provided in Table A.7.5.6.4.2.1-4.

The tests consist of four consecutive time periods, T1, T2, T3 and T4, respectively.

Three carriers are used in the test. Cell 1 (PCell) is on RF channel 1 (PCC) in FR1, and Cell 2 (SCell1) and Cell 3 (SCell2) are on RF channels 2 (SCC1) and 3 (SCC2) in FR2, respectively. All three cells have constant signal levels throughout the test.

Before the test starts,

- UE is connected to Cell 1 (PCell), Cell 2 (SCell1) and Cell 3 (SCell2).
- UE is configured with a single UE-specific downlink bandwidth part, BWP-0, for Cell 1. BWP-0 includes the bandwidth of the initial DL BWP and SSB.
- UE is configured with one non-dormant and one dormant UE-specific downlink bandwidth part, BWP-0 and BWP-1, respectively, for Cell 2 and Cell 3. BWP-0 includes the bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP in Cell 1 is BWP-0.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP in Cell 2 is BWP-0.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP in Cell 3 is BWP-0.
- UE is configured with DRX.
- UE is configured to monitor DCI format 2_6, and to be active during *onDuration* even when no DCI format 2_6 is detected (*ps-WakeUp*).

Time period T1 starts when the UE at *ps-Offset* before *onDuration* detects a DCI format 2_6 carrying dormancy indication that indicates that SCell1 and SCell2 are to be switched from non-dormancy to dormancy. The UE shall switch active bandwidth parts for SCell1 and SCell2, respectively, from non-dormant BWP-0 to dormant BWP-1. The UE shall complete the switching before the start of *onDuration*. The test equipment schedules the UE continuously with new data indications in PCell starting from beginning of *onDuration*. The test equipment verifies that the UE is transmitting HARQ feedback for PCell from the beginning of *onDuration* and thus verifies that the UE has completed interruptions due to dormancy switching before the start of *onDuration*.

Time period T2 starts when T1 is completed. The test equipment continues to schedule the UE continuously in PCell. The UE shall carry out CSI and RRM measurements on the dormant SCells. The UE shall report ACK/NACK in PCell in response to scheduled PDSCH, with the maximum loss of transmitted ACK/NACKs fulfilling the requirement in clause 8.2.2.2.12. The test equipment verifies that the loss of ACK/NACKs is no larger than 1.5%.

Time period T3 starts when T2 is completed. During T3, the test equipment does not schedule the UE, by which the inactivity timer expires and the UE stops monitoring PDCCH except for signalling using DCI format 2_6 at wake-up signalling occasions.

Time period T4 starts when the UE at *ps-Offset* before *onDuration* detects a DCI format 2_6 carrying dormancy indication that indicates that SCell1 and SCell2 are to be switched from dormancy to non-dormancy. The UE shall switch active bandwidth parts for SCell1 and SCell2, respectively, from dormant BWP-1 to non-dormant BWP-0. The UE shall complete the switching before the start of *onDuration*. The test equipment schedules the UE with new data indication in PCell, SCell1 and SCell2 during *onDuration*. The UE shall receive in PCell, SCell1 and SCell2 and send HARQ feedback for PCell, SCell1 and SCell2 via PCell. The test equipment verifies that the UE is transmitting HARQ feedback for PCell, SCell1 and SCell2 from the beginning of *onDuration*, and thus verifies that the UE has completed interruptions due to dormancy switching before the start of *onDuration*.

Table A.7.5.6.4.2.1-1: Supported test configurations

Config	Description
1	PCell: 15kHz SSB SCS, 10MHz bandwidth, FDD duplex mode SCells: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	PCell: 15kHz SSB SCS, 10MHz bandwidth, TDD duplex mode SCells: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode SCells: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to undergo test for one of the supported test configurations.	

Table A.7.5.6.4.2.1-2: General test parameters

Parameter	Unit	Value		Comment
		Test1	Test2	
NR RF Channel Number		1, 2, 3		Three NR radio channels are used for this test
Active PCell		Cell 1		PCell on RF channel number 1 in FR1
Active SCell1		Cell 2		SCell1 on RF channel number 2 in FR2
Active SCell2		Cell 3		SCell2 on RF channel number 3 in FR2
CSI reporting periodicity, Non-dormant BWP	ms	2		CSI reporting periodicity for periodic reporting of CQI for PCell and non-dormant SCells
CSI reporting periodicity, Dormant BWP	ms	40		CSI reporting periodicity for periodic reporting of CQI for dormant SCells
CP length		Normal		
DRX		DRX.8		For both PCell and SCells. See clause A.3.3.8.
ps-Offset		Depending on UE capability		Monitoring of DCI 2_6 ahead of start of drx-onDurationTimer. Value of ps-Offset shall correspond to SCell dormancy switching time for switching of two SCells, as specified in clause 8.6.2A. Actual value depends on reported UE capabilities.
ps-WakeUp		true		Wake up for onDuration in case DCI format 2_6 is not detected.
Cell 2 timing offset to Cell 1	μs	<24		Timing offset shall be less than MRTD for FR1-FR2 CA, and leave margin for timing difference between Cell2 and Cell3.
Cell 3 timing offset to Cell 2	ns	<260		Timing offset shall be less than MRTD for FR2 intra-band non-contiguous CA.

OFDM symbol range in slot for transmission of DCI with dormancy indication		0 – 2	3 – 11	Test1 is based on that triggering DCI is received within the first three OFDM symbols of a slot. Test2 is based on that the triggering DCI is received later than within the first three OFDM symbols of a slot.
T1	s	0.2		During this time the SCells are switched from non-dormancy to dormancy.
T2	s	10		During this time the SCells are dormant.
T3	s	0.2		During this time the UE is not scheduled in PCell.
T4	s	0.2		During this time the SCells are switched from dormancy to non-dormancy.

Table A.7.5.6.4.2.1-3: Cell specific test parameters

Parameter		Unit	Cell 1	Cell2	Cell 3
Frequency Range			FR1	FR2	FR2
NR RF channel			1	2	3
Duplex mode	Config 1		FDD	TDD	TDD
	Config 2,3		TDD		
TDD configuration	Config 1		---	TDDConf.3.1	TDDConf.3.1
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
BW _{channel}	Config 1,2	MHz	10: N _{RB,c} = 52	100: N _{RB,c} = 66	100: N _{RB,c} = 66
	Config 3		40: N _{RB,c} = 106		
Downlink initial BWP Configuration			DLBWP.0.2	DLBWP.0.2	DLBWP.0.2
Uplink initial BWP Configuration			ULBWP.0.2	-	-
Downlink active non-dormant BWP-0 Configuration			DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
Downlink active dormant BWP-1 Configuration			-	DLBWP.1.1	DLBWP.1.1
Uplink active BWP-0 Configuration			ULBWP.0.2	-	-
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.3.1 TDD	SR.3.1 TDD
	Config 2		SR.1.1 TDD		
	Config 3		SR.2.1 TDD		
CSI-RS configuration for CSI reporting, Non-dormant BWP	Config 1		CSI-RS.1.1 FDD	CSI-RS.3.1 TDD	CSI-RS.3.1 TDD
	Config 2		CSI-RS.1.1 TDD		
	Config 3		CSI-RS.2.1 TDD		
CSI-RS configuration for CSI reporting, Dormant BWP			-	CSI-RS.3.5 TDD	CSI-RS.3.5 TDD
TRS configuration	Config 1		TRS.1.1 FDD	TRS.2.1 TDD	TRS.2.1 TDD
	Config 2		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		
TCI state			TCI.State.0	TCI.State.0	TCI.State.0
RMSI CORESET parameters	Config 1		CR.1.1 FDD	-	-
	Config 2		CR.1.1 TDD		
	Config 3		CR.2.1 TDD		
Dedicated CORESET parameters, Test 1,2	Config 1		CCR.1.1 FDD	CCR.3.1 TDD	CCR.3.1 TDD
	Config 2		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		
Dedicated CORESET parameters, Test 3,4	Config 1		CCR.1.5 FDD	CCR.3.1 TDD	CCR.3.1 TDD
	Config 2		CCR.1.5 TDD		
	Config 3		CCR.2.3 TDD		
OCNG Patterns			OP.1	OP.1	OP.1
SSB Configuration	Config 1,2		SSB.1 FR1	SSB.1 FR2	SSB.1 FR2
	Config 3		SSB.2 FR1		

SMTC Configuration		SMTC.1	SMTC.1	SMTC.1
Correlation Matrix and Antenna Configuration		1x2 Low		
EPRE ratio of PSS to SSS	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS ^{Note1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note1}				
Propagation Condition		N/A Link only, see clause A.3.7A	AWGN	AWGN
Note 1: OCNG shall be used such that the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.7.5.6.4.2.1: OTA related test parameters

Parameter	Unit	Cell 1	Cell 2	Cell 3
Angle of arrival configuration		N/A Link only, see clause A.3.7A	Setup 1 defined in clause A.3.15.1	
Assumption for UE beams Note6			Fine	Fine
N_{Oc} Note1	dBm/15kHz		-112	-112
N_{Oc} Note1	dBm/SCS		-103	-103
SS-RSRP Note2	dBm/SCS Note3		-85	-85
$\hat{E}s/lot$	dB		18	18
I_o Note4	dBm/95.04 MHz Note4		-56	-56
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not setttable parameters themselves.			
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone			
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.			

A.7.5.6.4.2.2 Test Requirements

Starting from *onDuration* in time period T1, the UE shall transmit ACK/NACK in response to scheduling in PCell. There shall be no loss of ACK/NACK.

During time period T2, the UE shall transmit ACK/NACKs in response to scheduling in PCell and the rate of missed ACK/NACKs shall be no more than 1.5%.

Starting from *onDuration* in time period T4, the UE shall transmit ACK/NACK in response to scheduling in PCell, SCell1 and SCell2. There shall be no loss of ACK/NACK.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.6.5 Simultaneous RRC-based Active BWP Switch on multiple CCs

A.7.5.6.5.1 Active BWP switch on multiple SCells with non-DRX in SA

A.7.5.6.5.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for simultaneous RRC-based BWP switch on multiple CCs defined in clause 8.6.3A.

The supported test configurations are shown in Table A.7.5.6.5.1.1-1. The test scenario comprises one PCell (Cell 1) and one SCell (Cell 2) as given in Table A.7.5.6.5.1.1-2. NR cell-specific parameters are provided in Table A.7.5.6.5.1.1-3, and OTA related test parameters in Table A.7.5.6.5.1.1-4.

PDCCHs indicating new transmissions shall be transmitted in PCell and SCell throughout to ensure that UE sends ACK/NACKs for PDSCH reception in PCell, SCell.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), to Cell 2 (SCell) on radio channel 2 (SCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell1 (PCell), Cell 2 (SCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition on Cell1 (PCell), Cell 2 (SCell).

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration in Cell1 and Cell2, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition in Cell1 and Cell2.

The UE shall be able to receive PDSCH on Cell 1 and Cell 2 at the beginning of the DL slot right after PCell's DL slot ($i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length}$) as defined in clause 8.6.3A and be ready for the reception of uplink grant for the PCell no later than at the beginning of the DL slot right after slot ($i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length}$). The UE shall be continuously scheduled on Cell 1's BWP-1 and Cell 2's BWP-1 starting from the beginning of the DL slot right after slot ($i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length}$).

$T_{RRCprocessingDelay}$, $T_{BWPswitchDelayRRC}$ and D_{RRC} are defined in clause 8.6.3A.

The test equipment verifies the DL BWP switch time in Cell 1 and Cell 2 by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.7.5.6.5.1.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD -TDD duplex mode

Table A.7.5.6.5.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2, 3	Three NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
Cell2 timing offset to Cell1	μs	0	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	0.2	During T1, RRC-based simultaneous BWP switching of PCell and SCell is carried out.

Table A.7.5.6.5.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1	Cell 2
Frequency Range			FR2	
NR RF channel			1	2
Duplex mode			TDD	
TDD configuration			TDDConf.3.1	
BW _{channel}		MHz	100: N _{RB,c} = 66	
Active Downlink BWP ID			0	1
Downlink initial BWP Configuration			DLBWP.0.2	DLBWP.0.2
Uplink initial BWP Configuration			ULBWP.0.2	ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration		DLBWP.1.3	DLBWP.1.3
	Active UL BWP-1 Configuration		ULBWP.1.3	ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration		DLBWP.1.1	DLBWP.1.1
	Active UL BWP-1 Configuration		ULBWP.1.1	ULBWP.1.1
PDSCH Reference measurement channel			SR.3.1 TDD	
TRS configuration			TRS.2.1 TDD	
TCI state			TCI.State.0	
RMSI CORESET parameters			CR.3.1 TDD	
Dedicated CORESET parameters			CCR.3.1 TDD	
OCNG Patterns			OP.1	
SSB Configuration			SSB.3 FR2	
SMTc Configuration			SMTc.1	
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS				
Note1				

EPRE ratio of OCNG to OCNG DMRS ^{Note1}			
Propagation Condition		AWGN	AWGN
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low
Note 1: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].			

Table A.7.5.6.3.1.1-4: OTA related test parameters for BWP switching test case

Parameter	Unit	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 defined in clause A.3.15.1	
Assumption for UE beams ^{Note4}		Fine	Fine
N_{oc} ^{Note1}	dBm/15kHz	-111.7	-111.7
N_{oc} ^{Note1}	dBm/SCS	-102.7	-102.7
$\hat{E}_s/N_{oc}$	dB	7	7
SSB-RP ^{Note2}	dBm/SCS	-85	-85
$\hat{E}_s/I_{ot}$	dB	18	18
I_o ^{Note3}	dBm/95.04 MHz	-56	-56
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB-RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Equivalent power received by an antenna with 0 dBi gain at the center of the quiet zone Note 4: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.			

A.7.5.6.5.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell and SCell in the beginning of the DL slot right after slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length})$.

All of the above test requirements shall be fulfilled in order for the observed PCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.6.5.2 NR FR2-2 Active BWP switch on multiple SCells with non-DRX in SA

A.7.5.6.5.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for simultaneous RRC-based BWP switch on multiple CCs defined in clause 8.6.3A.

The supported test configurations are shown in Table A.7.5.6.5.2.1-1. The test scenario comprises one PCell (Cell 1) and one SCell (Cell 2) as given in Table A.7.5.6.5.2.1-2. NR cell-specific parameters are provided in Table A.7.5.6.5.2.1-3, and OTA related test parameters in Table A.7.5.6.5.2.1-4.

PDCCHs indicating new transmissions shall be transmitted in PCell and SCell throughout to ensure that UE sends ACK/NACKs for PDSCH reception in PCell, SCell.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), to Cell 2 (SCell) on radio channel 2 (SCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell1 (PCell), Cell 2 (SCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition on Cell1 (PCell), Cell 2 (SCell).

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration in Cell1 and Cell2, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition in Cell1 and Cell2.

The UE shall be able to receive PDSCH on Cell 1 and Cell 2 at the beginning of the DL slot right after PCell's DL slot ($i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length}$) as defined in clause 8.6.3A and be ready for the reception of uplink grant for the PCell no later than at the beginning of the DL slot right after slot ($i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length}$). The UE shall be continuously scheduled on Cell 1's BWP-1 and Cell 2's BWP-1 starting from the beginning of the DL slot right after slot ($i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length}$).

$T_{RRCprocessingDelay}$, $T_{BWPswitchDelayRRC}$ and D_{RRC} are defined in clause 8.6.3A.

The test equipment verifies the DL BWP switch time in Cell 1 and Cell 2 by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.7.5.6.5.2.1-1: DL BWP switch supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.6.5.2.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
Cell2 timing offset to Cell1	μs	0	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	[0.2]	During T1, RRC-based simultaneous BWP switching of PCell and SCell is carried out.

Table A.7.5.6.5.2.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Config	Cell 1	Cell2
Frequency Range		1,2,3	FR2-2	FR2-2
Duplex mode		1,2,3	TDD	
TDD configuration		1	TDDConf.3.1	
		2	TBD	
		3	TBD	
BW _{channel}		1	100 MHz: N _{RB,c} = 66	
		2	400 MHz: N _{RB,c} = 66	
		3	400 MHz: N _{RB,c} = 33	
Active BWP ID		1,2,3	0	0
Downlink initial BWP Configuration		1,2,3	DLBWP.0.2	
Uplink initial BWP Configuration		1,2,3	ULBWP.0.2	N.A.
Downlink active BWP-0 Configuration		1,2,3	DLBWP.0.2	N.A.
Downlink active BWP-1 Configuration		1,2,3	N.A.	DLBWP.1.1
Downlink active BWP-2 Configuration		1,2,3	N.A.	DLBWP.1.3
Uplink active BWP-0 Configuration		1,2,3	ULBWP.0.2	N.A.
Uplink active BWP-1 Configuration		1,2,3	N.A.	N.A.
Uplink active BWP-2 Configuration		1,2,3	N.A.	N.A.
PDSCH Reference measurement channel		1	SR.3.1 TDD	
		2	TBD	
		3	TBD	
TRS configuration		1	TRS.2.1 TDD	
		2	TBD	
		3	TBD	
TCI state		1,2,3	TCI.State.0	
RMSI CORESET parameters		1	CR.3.1 TDD	
		2	TBD	
		3	TBD	
		1	CCR.3.1 TDD	

Dedicated CORESET parameters		2	TBD	
		3	TBD	
OCNG Patterns		1,2,3	OP.1	
SSB Configuration		1	SSB.1 FR2	
		2	TBD	
		3	TBD	
SMTC Configuration		1,2,3	SMTC.1	
Correlation Matrix and Antenna Configuration			1x2 Low	
EPRE ratio of PSS to SSS	dB		0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation Condition			AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.7.5.6.5.2.1-4: OTA related test parameters for BWP switching test case

Parameter	Unit	Config	Cell 1	Cell 2
Angle of arrival configuration		1,2,3	Setup 1 defined in clause A.3.15.1	Setup 1 defined in clause A.3.15.1
Assumption for UE beams Note 6		1,2,3	Fine	Fine
N_{oc} Note1	dBm/15kHz		-112	-112
N_{oc} Note1	dBm/SCS	1	-103	-103
		2	-97	-97
		3	-94	-94
SS-RSRP Note2	dBm/SCS Note3	1	-85	-85
		2	-79	-79
		3	-76	-76
$\hat{E}_s/I_{ot}$	dB		18	18
I_o Note4	dBm/95.04 MHz Note4	1	-56	-56
	dBm/380.16 MHz Note4	2,3	-50.0	-50.0
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone.
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.7.5.6.5.2.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell and SCell in the beginning of the DL slot right after slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC} + D_{RRC}}{NR\ slot\ length})$.

All of the above test requirements shall be fulfilled in order for the observed PCell and SCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.7 PSCell addition and release delay

A.7.5.7.1 Addition and Release Delay of known NR PSCell

A.7.5.7.1.1 Test Purpose and Environment

The purpose of this test is to verify the PSCell addition and release delay requirements defined in clauses 8.9.2 and 8.9.3, respectively, for the case where the PSCell is known to the UE at the time of addition.

The supported test configurations are given in Table A.7.5.7.1.1-1. The test scenario comprises two NR cells, Cell 1 and Cell 2, on radio channel 1 in FR1 and radio channel 2 in FR2, respectively. Test parameters are given in Tables A.7.5.7.1.1-2, A.7.5.7.1.1-3 and A.7.5.7.1.1-4 below. The test consists of six time periods with durations T1, T2, T3, T4, T5 and T6, respectively.

At the start of T1, the UE shall be connected to Cell 1 (PCell) on radio channel 1 (PCC) and shall only monitor PCC and hence be unaware of Cell 2 (PSCell-to-be) on radio channel 2. Before the start of T2, the test system shall send measurement control information including measurement gap configuration and event-triggered reporting configuration for measurements on radio channel 2.

During T2, the Cell2 becomes known to the UE. Therefore, during T2 the UE shall report Event triggered report.

The point in time at which the RRC message to release measurement gap is transmitted from the test system defines the start of period T3. During T3, after measurement gap is released, the test system transmits the RRC message to the UE to add PSCell on radio channel 2. The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added.

The point in time at which the RRC message to add PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

During T4, the UE shall carry out random access towards the PSCell. Reception by the test system of the PRACH preamble defines the start of T5.

During T5, the UE shall send periodic CSI reports in PSCell. After having received at least one such report, the test system shall send a RRC message instructing the UE to release the PSCell. Reception by the UE of the RRC message defines the start of T6.

During T6, the UE shall release the PSCell.

Table A.7.5.7.1.1-1: Supported test configurations for FR2 PSCell

Config	Description
1	FR1 FDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
2	FR1 TDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
3	FR1 TDD SSB SCS 30kHz BW 40MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.7.1.1-2: General test parameters for PSCell addition and release delay

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test
Active PCell			Cell 1	PCell on RF channel number 1 in FR1
Neighbour cell			Cell 2	Neighbour cell (PSCell-to-be) on RF channel number 2 in FR2
A4	Hysteresis	dB	0	Hysteresis for event A4
	Threshold RSRP	dBm	-118	Threshold for event A4
	Time to Trigger	S	0	Time to trigger for event A4
DRX			OFF	For both PCell and PSCell once activated
Measurement gap pattern ID			0	Gaps are configured before T2 and released before T3.
PRACH configuration in Cell 2			FR2 PRACH configuration 2	PRACH configuration as specified in Clause A.3.8.3.2.
CSI reporting periodicity and offset configuration for Cell 2		ms	2	
T1		s	5	During this time the PCell is known and Cell 2 is unknown.
T2		s	1	During this time the UE shall identify neighbour cell 2 and report event B1.
T3		s	3.5	During this time the test system transmits the RRC messages to release measurement gap and add PSCell.
T4		s	1	During this time the UE adds the PSCell.
T5		s	1	During this time the UE sends CSI reports for PSCell.
T6		s	1	During this time the UE releases the PSCell.

Table A.7.5.7.1.1-3: NR Cell specific test parameters for PSCell addition and release delay

Parameter	Unit	Config	Cell 1	Cell2					
				T1	T2	T3	T4	T5	T6
Frequency Range		1,2,3	FR1	FR2					
Duplex mode		1	FDD	TDD					
		2,3	TDD						
TDD configuration		1	–	TDDConf.3.1					
		2	TDDConf.1.1						
		3	TDDConf.2.1						
BW _{channel}	MHz	1,2	10: N _{RB,c} = 52	100: N _{RB,c} = 66					
		3	40: N _{RB,c} = 106						
Data RBs allocated		1,2	52	48					
		3	106						
Initial Downlink BWP configuration		1,2,3	DLBWP.0.1	DLBWP.0.1					
Initial Uplink BWP configuration		1,2,3	ULBWP.0.1	ULBWP.0.1					
Dedicated Downlink BWP configuration		1,2,3	DLBWP.1.1	DLBWP.1.1					
Dedicated Uplink BWP configuration		1,2,3	ULBWP.1.1	ULBWP.1.1					

PDSCH Reference Measurement Channel		1	SR.1.1 FDD	SR.3.3 TDD
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
TRS configuration		1,2,3	–	TRS.2.1 TDD
TCI state		1,2,3	–	TCI.State.0
RMSI CORESET parameters		1	CR.1.1 FDD	CR.3.2 TDD
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
Dedicated CORESET parameters		1	CCR.1.1 FDD	CCR.3.7 TDD
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
OCNG Patterns ^{Note1}		1,2,3	OP.1	OP.3
SSB configuration		1,2	SSB.1 FR1	SSB.2 FR2
		3	SSB.2 FR1	
SMTC configuration		1,2,3	SMTC.2	SMTC.1
PDSCH/PDCCH subcarrier spacing	kHz	1,2	15	120
		3	30	
EPRE ratio of PSS to SSS	dB	1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
Propagation Condition		1,2,3	N/A	No external noise (Note 6)
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void Note 5: Void Note 6: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

Table A.7.5.7.1.1-4: OTA related test parameters for PSCell addition and release delay

Parameter	Unit	Config	Cell 1	Cell 2					
				T1	T2	T3	T4	T5	T6
Angle of arrival configuration		1,2,3	Link only, see clause A.3.7A	Setup 2a according to clause A.3.15.2.1					
Assumption for UE beams ^{Note 3}				Rough					
$\bar{E}_s$	dBm/SCS	1,2,3		$-\infty$	-81				
SSB_RP ^{Note1, Note2}	dBm/SCS	1,2,3		$-\infty$	-81				
$\hat{E}_s/I_{\text{ot BB}}$ ^{Note1, Note 4}	dB	1,2,3		$-\infty$	4.88				
I_o ^{Note 1, Note2}	dBm/95.04 MHz	1,2,3		N/A	-56.41				
Note 1: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.									
Note 2: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.									
Note 3: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.									
Note 4: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _s from TS 38.101-2 [19] Table 6.2.1.3-4.									

A.7.5.7.1.2 Test Requirements

The UE shall transmit the PRACH preamble to PSCell at latest 112 ms into T4.

The UE shall transmit at least one periodic CSI report for PSCell during T5.

The UE shall stop transmitting CSI reports for PSCell at latest 20 ms into T6.

All of the above test requirements shall be fulfilled in order for the observed PSCell addition and release delay to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.7.2 Addition and Release Delay of unknown NR PSCell in

A.7.5.7.2.1 Test Purpose and Environment

The purpose of this test is to verify the PSCell addition and release delay requirements defined in clauses 8.9.2 and 8.9.3, respectively, for the case where the PSCell is unknown to the UE at the time of addition.

The supported test configurations are given in Table A.7.5.7.2.1-1. The test scenario comprises two NR cells, Cell 1 and Cell 2, on radio channel 1 in FR1 and radio channel 2 in FR2, respectively. Test parameters are given in Tables A.7.5.7.2.1-2, A.7.5.7.2.1-3 and A.7.5.7.2.1-4 below. The test consists of four time periods with durations T1, T2, T3 and T4, respectively.

At the start of T1, the UE shall be connected to Cell 1 (PCell) on radio channel 1 (PCC) and shall only monitor PCC and hence be unaware of Cell 2 (PSCell-to-be) on radio channel 2. At the end of T1, the test system shall send a RRC message instructing the UE to add PSCell (Cell 2), and further instructing the UE to report CSI periodically in the PSCell once it has been added. Reception by the UE of this RRC message defines the start of T2.

During T2, the UE shall identify PSCell and carry out random access towards the PSCell. Reception by the test system of the PRACH preamble defines the start of T3.

During T3, the UE shall send periodic CSI reports in PSCell. After having received at least one such report, the test system shall send a RRC message instructing the UE to release the PSCell. Reception by the UE of the RRC message defines the start of T4.

During T4, the UE shall release the PSCell.

Table A.7.5.7.2.1-1: Supported test configurations for FR2 PSCell

Config	Description
1	FR1 FDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
2	FR1 TDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
3	FR1 TDD SSB SCS 30kHz BW 40MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.7.2.1-2: General test parameters for PSCell addition and release delay

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1 in FR1
Neighbour cell		Cell 2	Neighbour cell (PSCell-to-be) on RF channel number 2 in FR2
DRX		OFF	For both PCell and PSCell once activated
PRACH configuration in Cell 2		FR2 PRACH configuration 2	PRACH configuration as specified in Clause A.3.8.3.2.
CSI reporting periodicity and offset configuration for Cell 2	ms	[2]	

T1	s	5	During this time the PCell is known and Cell 2 is unknown.
T2	s	1	During this time the UE adds the PSCell.
T3	s	1	During this time the UE sends CSI reports for PSCell.
T4	s	1	During this time the UE releases the PSCell.

Table A.7.5.7.2.1-3: NR Cell specific test parameters for PSCell addition and release delay

Parameter	Unit	Config	Cell 1	Cell2			
				T1	T2	T3	T4
Frequency Range		1,2,3	FR1	FR2			
Duplex mode		1	FDD	TDD			
		2,3	TDD				
TDD configuration		1	–	TDDConf.3.1			
		2	TDDConf.1.1				
		3	TDDConf.2.1				
BW _{channel}	MHz	1,2	10: N _{RB,c} = 52	100: N _{RB,c} = 66			
		3	40: N _{RB,c} = 106				
Data RBs allocated		1,2	52	48			
		3	106				
Initial Downlink BWP configuration		1,2,3	DLBWP.0.1	DLBWP.0.1			
Initial Uplink BWP configuration		1,2,3	ULBWP.0.1	ULBWP.0.1			
Dedicated Downlink BWP configuration		1,2,3	DLBWP.1.1	DLBWP.1.1			
Dedicated Uplink BWP configuration		1,2,3	ULBWP.1.1	ULBWP.1.1			
PDSCH Reference Measurement Channel		1	SR.1.1 FDD	SR.3.3 TDD			
		2	SR.1.1 TDD				
		3	SR.2.1 TDD				
TRS configuration		1,2,3	–	TRS.2.1 TDD			
TCI state		1,2,3	–	TCI.State.0			
RMSI CORESET parameters		1	CR.1.1 FDD	CR.3.2 TDD			
		2	CR.1.1 TDD				
		3	CR.2.1 TDD				
Dedicated CORESET parameters		1	CCR.1.1 FDD	CCR.3.7 TDD			
		2	CCR.1.1 TDD				
		3	CCR.2.1 TDD				
OCNG Patterns ^{Note1}		1,2,3	OP.1	OP.3			
SSB configuration		1,2	SSB.1 FR1	SSB.2 FR2			
		3	SSB.2 FR1				
SMTC configuration		1,2,3	SMTC.2	SMTC.1			
PDSCH/PDCCH subcarrier spacing	kHz	1,2	15	120			
		3	30				
EPRE ratio of PSS to SSS	dB	1,2,3	0	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS							
EPRE ratio of OCNG to OCNG DMRS							
Propagation Condition		1,2,3	AWGN	No external noise (Note 6)			

Note 1:	OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Void
Note 3:	Void
Note 4:	Void
Note 5:	Void
Note 6:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].

Table A.7.5.7.2.1-4: OTA related test parameters for PSCell addition and release delay

Parameter	Unit	Config	Cell 1	Cell 2			
				T1	T2	T3	T4
Angle of arrival configuration		1,2,3	Link only, see clause A.3.7A	Setup 2a according to clause A.3.15.2.1			
Assumption for UE beams ^{Note 3}				Rough			
$\hat{E}_s$	dBm/SCS	1,2,3		$-\infty$	-81		
SSB_RP ^{Note1, Note 2}	dBm/SCS	1,2,3		$-\infty$	-81		
$\hat{E}_s/I_{ot_BB}$ ^{Note1, Note 4}	dB	1,2,3		$-\infty$	4.88		
I_o ^{Note 1, Note 2}	dBm/95.04 MHz	1,2,3		N/A	-56.41		
Note 1: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 2: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.							
Note 3: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.							
Note 4: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMBs from TS 38.101-2 [19] Table 6.2.1.3-4.							

A.7.5.7.2.2 Test Requirements

The UE shall transmit the PRACH preamble to PSCell at latest 572 ms into T2.

The UE shall transmit at least one periodic CSI report for PSCell during T3.

The UE shall stop transmitting CSI reports for PSCell at latest 20 ms into T4.

All of the above test requirements shall be fulfilled in order for the observed PSCell addition and release delay to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.7.3 Addition and Release Delay of known NR PSCell in FR2-2

A.7.5.7.3.1 Test Purpose and Environment

The purpose of this test is to verify the PSCell addition and release delay requirements defined in clauses 8.9.2 and 8.9.3, respectively, for the case where the PSCell is known to the UE at the time of addition.

The supported test configurations are given in Table A.7.5.7.3.1-1. The test scenario comprises two NR cells, Cell 1 and Cell 2, on radio channel 1 in FR1 and radio channel 2 in FR2-2, respectively. Test parameters are given in Tables A.7.5.7.3.1-2, A.7.5.7.3.1-3 and A.7.5.7.3.1-4 below. The test consists of five time periods with durations T1, T2, T3, T4 and T5, respectively.

At the start of T1, the UE shall be connected to Cell 1 (PCell) on radio channel 1 (PCC) and shall only monitor PCC and hence be unaware of Cell 2 (PSCell-to-be) on radio channel 2. Before the start of T2, the test system shall send

measurement control information including measurement gap configuration and event-triggered reporting configuration for measurements on radio channel 2.

During T2, the Cell2 becomes known to the UE. Therefore, during T2 the UE shall report Event triggered report.

The point in time at which the RRC message to release measurement gap is transmitted from the test system defines the start of period T3. During T3, after measurement gap is released, the test system transmits the RRC message to the UE to add PSCell on radio channel 2. The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added.

The point in time at which the RRC message to add PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

During T4, the UE shall carry out random access towards the PSCell. Reception by the test system of the PRACH preamble defines the start of T4.

During T5, the UE shall send periodic CSI reports in PSCell. After having received at least one such report, the test system shall send a RRC message instructing the UE to release the PSCell. Reception by the UE of the RRC message defines the start of T6

During T6, the UE shall release the PSCell.

Table A.7.5.7.3.1-1: Supported test configurations for FR2-2 PSCell

Config	Description
1	FR1 FDD SSB SCS 15kHz BW 10MHz – FR2-2 TDD SSB SCS 120kHz BW 100MHz
2	FR1 TDD SSB SCS 15kHz BW 10MHz – FR2-2 TDD SSB SCS 120kHz BW 100MHz
3	FR1 TDD SSB SCS 30kHz BW 40MHz – FR2-2 TDD SSB SCS 120kHz BW 100MHz
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.7.3.1-2: General test parameters for PSCell addition and release delay

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test
Active PCell			Cell 1	PCell on RF channel number 1 in FR1
Neighbour cell			Cell 2	Neighbour cell (PSCell-to-be) on RF channel number 2 in FR2-2
A4	Hysteresis	dB	0	Hysteresis for event A4
	Threshold RSRP	dBm	-118	Threshold for event A4
	Time to Trigger	S	0	Time to trigger for event A4
DRX			OFF	For both PCell and PSCell once activated
Measurement gap pattern ID			0	Gaps are configured before T2 and released before T3.
PRACH configuration in Cell 2			FR2 PRACH configuration 2	PRACH configuration as specified in Clause A.3.8.3.2.
CSI reporting periodicity and offset configuration for Cell 2		ms	2	
T1		s	5	During this time the PCell is known and Cell 2 is unknown.
T2		s	1	During this time the UE shall identify neighbour cell 2 and report event B1.
T3		s	3.5	During this time the test system transmits the RRC messages to release measurement gap and add PSCell.
T4			1	During this time the UE adds the PSCell.
T5		s	1	During this time the UE sends CSI reports for PSCell.
T6		s	1	During this time the UE releases the PSCell.

Table A.7.5.7.3.1-3: NR Cell specific test parameters for PSCell addition and release delay

Parameter	Unit	Config	Cell 1	Cell2				
				T1	T2	T3	T4	T5
Frequency Range		1,2,3	FR1	FR2-2				
Duplex mode		1	FDD	TDD				
		2,3	TDD					
TDD configuration		1	–	TDDConf.3.1				
		2	TDDConf.1.1					
		3	TDDConf.2.1					
BW _{channel}	MHz	1,2	10: N _{RB,c} = 52	100: N _{RB,c} = 66				
		3	40: N _{RB,c} = 106					
Data RBs allocated		1,2	52	48				
		3	106					
Initial Downlink BWP configuration		1,2,3	DLBWP.0.1	DLBWP.0.1				
Initial Uplink BWP configuration		1,2,3	ULBWP.0.1	ULBWP.0.1				
Dedicated Downlink BWP configuration		1,2,3	DLBWP.1.1	DLBWP.1.1				
Dedicated Uplink BWP configuration		1,2,3	ULBWP.1.1	ULBWP.1.1				
PDSCH Reference Measurement Channel		1	SR.1.1 FDD	SR.3.3 TDD				
		2	SR.1.1 TDD					
		3	SR.2.1 TDD					
TRS configuration		1,2,3	–	TRS.2.1 TDD				
TCI state		1,2,3	–	TCI.State.0				
RMSI CORESET parameters		1	CR.1.1 FDD	CR.3.2 TDD				
		2	CR.1.1 TDD					
		3	CR.2.1 TDD					
Dedicated CORESET parameters		1	CCR.1.1 FDD	CCR.3.7 TDD				
		2	CCR.1.1 TDD					
		3	CCR.2.1 TDD					
OCNG Patterns ^{Note1}		1,2,3	OP.1	OP.3				
SSB configuration		1,2	SSB.1 FR1	SSB.2 FR2				
		3	SSB.2 FR1					
SMTC configuration		1,2,3	SMTC.2	SMTC.1				
PDSCH/PDCCH subcarrier spacing	kHz	1,2	15	120				
		3	30					
EPRE ratio of PSS to SSS	dB	1,2,3	0	0				
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS								
EPRE ratio of OCNG to OCNG DMRS								
Propagation Condition		1,2,3	N/A	No external noise (Note 2)				
Note 1:	OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].							

Table A.7.5.7.3.1-4: OTA related test parameters for PSCell addition and release delay

Parameter	Unit	Config	Cell 1	Cell 2				
				T1	T2	T3	T4	T5

Angle of arrival configuration		1,2,3	Link only, see clause A.3.7A	Setup 2a according to clause A.3.15.2.1	
Assumption for UE beams ^{Note 3}				Rough	
$\hat{E}_s$	dBm/SCS	1,2,3		$-\infty$	-81
SSB_RP ^{Note1, Note2}	dBm/SCS	1,2,3		$-\infty$	-81
$\hat{E}_s / I_{ot_BB}$ ^{Note1, Note 4}	dB	1,2,3		$-\infty$	4.88
I_o ^{Note 1, Note2}	dBm/95.04 MHz	1,2,3		N/A	-56.41
Note 1: E_s/I_{ot}, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone. Note 3: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation. Note 4: Calculation of E_s/I_{ot_BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_s from TS 38.101-2 [19] Table 6.2.1.3-4.					

A.7.5.7.3.2 Test Requirements

The UE shall transmit the PRACH preamble to PSCell at latest TBD ms into T3.

The UE shall transmit at least one periodic CSI report for PSCell during T4.

The UE shall stop transmitting CSI reports for PSCell at latest 20 ms into T5.

All of the above test requirements shall be fulfilled in order for the observed PSCell addition and release delay to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.7.4 Addition and Release Delay of unknown NR PSCell in FR2-2

A.7.5.7.4.1 Test Purpose and Environment

The purpose of this test is to verify the PSCell addition and release delay requirements defined in clauses 8.9.2 and 8.9.3, respectively, for the case where the PSCell is unknown to the UE at the time of addition.

The supported test configurations are given in Table A.7.5.7.4.1-1. The test scenario comprises two NR cells, Cell 1 and Cell 2, on radio channel 1 in FR1 and radio channel 2 in FR2-2, respectively. Test parameters are given in Tables A.7.5.7.4.1-2, A.7.5.7.4.1-3 and A.7.5.7.4.1-4 below. The test consists of four time periods with durations T1, T2, T3 and T4, respectively.

At the start of T1, the UE shall be connected to Cell 1 (PCell) on radio channel 1 (PCC) and shall only monitor PCC and hence be unaware of Cell 2 (PSCell-to-be) on radio channel 2. At the end of T1, the test system shall send a RRC message instructing the UE to add PSCell (Cell 2), and further instructing the UE to report CSI periodically in the PSCell once it has been added. Reception by the UE of this RRC message defines the start of T2.

During T2, the UE shall identify PSCell and carry out random access towards the PSCell. Reception by the test system of the PRACH preamble defines the start of T3.

During T3, the UE shall send periodic CSI reports in PSCell. After having received at least one such report, the test system shall send a RRC message instructing the UE to release the PSCell. Reception by the UE of the RRC message defines the start of T4.

During T4, the UE shall release the PSCell.

Table A.7.5.7.4.1-1: Supported test configurations for FR2-2 PSCell

Config	Description
1	FR1 FDD SSB SCS 15kHz BW 10MHz – FR2-2 TDD SSB SCS 120kHz BW 100MHz
2	FR1 TDD SSB SCS 15kHz BW 10MHz – FR2-2 TDD SSB SCS 120kHz BW 100MHz
3	FR1 TDD SSB SCS 30kHz BW 40MHz – FR2-2 TDD SSB SCS 120kHz BW 100MHz
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.7.4.1-2: General test parameters for PSCell addition and release delay

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two radio channels are used for this test
Active PCell		Cell 1	PCell on RF channel number 1 in FR1
Neighbour cell		Cell 2	Neighbour cell (PSCell-to-be) on RF channel number 2 in FR2-2
DRX		OFF	For both PCell and PSCell once activated
PRACH configuration in Cell 2		FR2 PRACH configuration 2	PRACH configuration as specified in Clause A.3.8.3.2.
CSI reporting periodicity and offset configuration for Cell 2	ms	[2]	
T1	s	5	During this time the PCell is known and Cell 2 is unknown.
T2	s	1	During this time the UE adds the PSCell.
T3	s	1	During this time the UE sends CSI reports for PSCell.
T4	s	1	During this time the UE releases the PSCell.

Table A.7.5.7.4.1-3: NR Cell specific test parameters for PSCell addition and release delay

Parameter	Unit	Config	Cell 1	Cell2			
				T1	T2	T3	T4
Frequency Range		1,2,3	FR1	FR2-2			
Duplex mode		1	FDD	TDD			
		2,3	TDD				
TDD configuration		1	–	TDDConf.3.1			
		2	TDDConf.1.1				
		3	TDDConf.2.1				
BW _{channel}	MHz	1,2	10: N _{RB,c} = 52	100: N _{RB,c} = 66			
		3	40: N _{RB,c} = 106				
Data RBs allocated		1,2	52	48			
		3	106				
Initial Downlink BWP configuration		1,2,3	DLBWP.0.1	DLBWP.0.1			
Initial Uplink BWP configuration		1,2,3	ULBWP.0.1	ULBWP.0.1			
Dedicated Downlink BWP configuration		1,2,3	DLBWP.1.1	DLBWP.1.1			
Dedicated Uplink BWP configuration		1,2,3	ULBWP.1.1	ULBWP.1.1			
PDSCH Reference Measurement Channel		1	SR.1.1 FDD	SR.3.3 TDD			
		2	SR.1.1 TDD				
		3	SR.2.1 TDD				
TRS configuration		1,2,3	–	TRS.2.1 TDD			
TCI state		1,2,3	–	TCI.State.0			
RMSI CORESET parameters		1	CR.1.1 FDD	CR.3.2 TDD			
		2	CR.1.1 TDD				
		3	CR.2.1 TDD				
Dedicated CORESET parameters		1	CCR.1.1 FDD	CCR.3.7 TDD			
		2	CCR.1.1 TDD				

		3	CCR.2.1 TDD	
OCNG Patterns ^{Note1}		1,2,3	OP.1	OP.3
SSB configuration		1,2	SSB.1 FR1	SSB.2 FR2
		3	SSB.2 FR1	
SMTC configuration		1,2,3	SMTC.2	SMTC.1
PDSCH/PDCCH subcarrier spacing	kHz	1,2	15	120
		3	30	
EPRE ratio of PSS to SSS	dB	1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
Propagation Condition		1,2,3	No external noise (Note 2)	No external noise (Note 2)
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

Table A.7.5.7.4.1-4: OTA related test parameters for PSCell addition and release delay

Parameter	Unit	Config	Cell 1	Cell 2			
				T1	T2	T3	T4
Angle of arrival configuration		1,2,3	Link only, see clause A.3.7A	Setup 2a according to clause A.3.15.2.1			
Assumption for UE beams ^{Note 3}				Rough			
$\hat{E}_s$	dBm/SCS	1,2,3		$-\infty$	-81		
SSB_RP ^{Note1, Note 2}	dBm/SCS	1,2,3		$-\infty$	-81		
$\hat{E}_s/I_{ot_BB}$ ^{Note1, Note 4}	dB	1,2,3		$-\infty$	4.88		
I_o ^{Note 1, Note 2}	dBm/95.04 MHz	1,2,3		N/A	-56.41		
Note 1: Es/lot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 2: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.							
Note 3: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.							
Note 4: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _s from TS 38.101-2 [19] Table 6.2.1.3-4.							

A.7.5.7.4.2 Test Requirements

The UE shall transmit the PRACH preamble to PSCell at latest TBD ms into T2.

The UE shall transmit at least one periodic CSI report for PSCell during T3.

The UE shall stop transmitting CSI reports for PSCell at latest 20 ms into T4.

All of the above test requirements shall be fulfilled in order for the observed PSCell addition and release delay to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.8 Active TCI state switch delay

A.7.5.8.1 MAC-CE based active TCI state switch

A.7.5.8.1.1 NR PCell FR2 active TCI state switch for a known TCI state

A.7.5.8.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10.3. Supported test configuration is shown in Table A.7.5.8.1.1.1-1.

The test scenario comprises of one NR PCell (Cell 1) as given in Table A.7.5.8.1.1.1-2. Cell-specific parameters of NR PCell are specified in Table A.7.5.8.1.1.1-3 below. The OTA related test parameters for FR2 are shown in Table A.7.5.8.1.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 2 different TCI states for PCell, PDCCH TCI state 0 (QCL'd to SSB0) and TCState 1 (QCL'd to SSB1), in Cell 1 before starting the test.
- UE is indicated in TCI state 0 as the active PDCCH TCI state
- Target TCI state is not in the active TCI state list.

The test consists of two time periods, T1 and T2. Figure A.7.5.8.1.1.1-1 and Figure A.7.5.8.1.1.1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to TCI state 1. *tci-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

The test equipment verifies that UE can be scheduled on PCell on TCI state 0 till slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$. The test equipment also verifies the TCI state switch time in PCell by scheduling the UE on TCI state 1 after slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{first-SSB}} + T_{\text{SSB-proc}})/\text{NR slot length}$.

Table A.7.5.8.1.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.8.1.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	0.2	

Table A.7.5.8.1.1.1-3: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW_{channel}		100 MHz: $N_{\text{RB},c} = 66$
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTc Configuration		SMTc.1
TCI State 0		TC. State.2
TCI State 1		TCI.State.3
TRS Configuration		TRS.2.1 TDD TRS.2.2 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		No external noise (Note 2)
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].		

Table A.7.5.8.1.1.1-4: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams ^{Note 6}		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B RP ^{Note 2}	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s/I_{ot\ BB}$ ^{Note 7}	dB	8.3	8.3	-Infinity	8.3
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-55.41	-55.41	- Infinity	-55.41

Note 1:	Void
Note 2:	SS B _{RP} and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 7:	Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

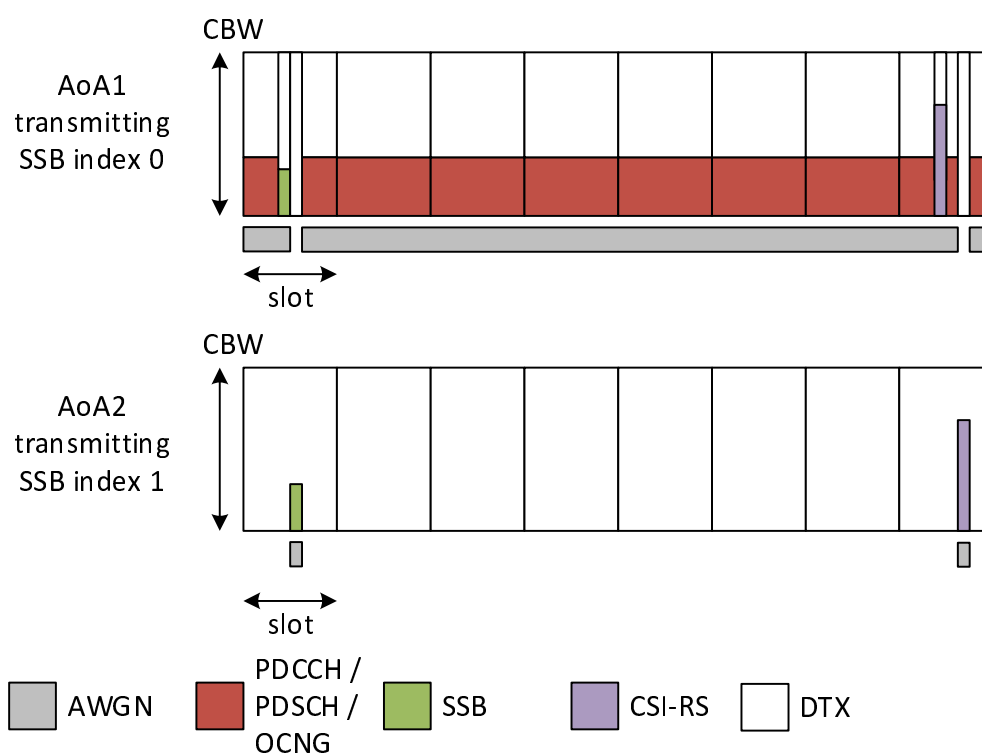


Figure A.7.5.8.1.1-1: Time multiplexed downlink transmissions during T1

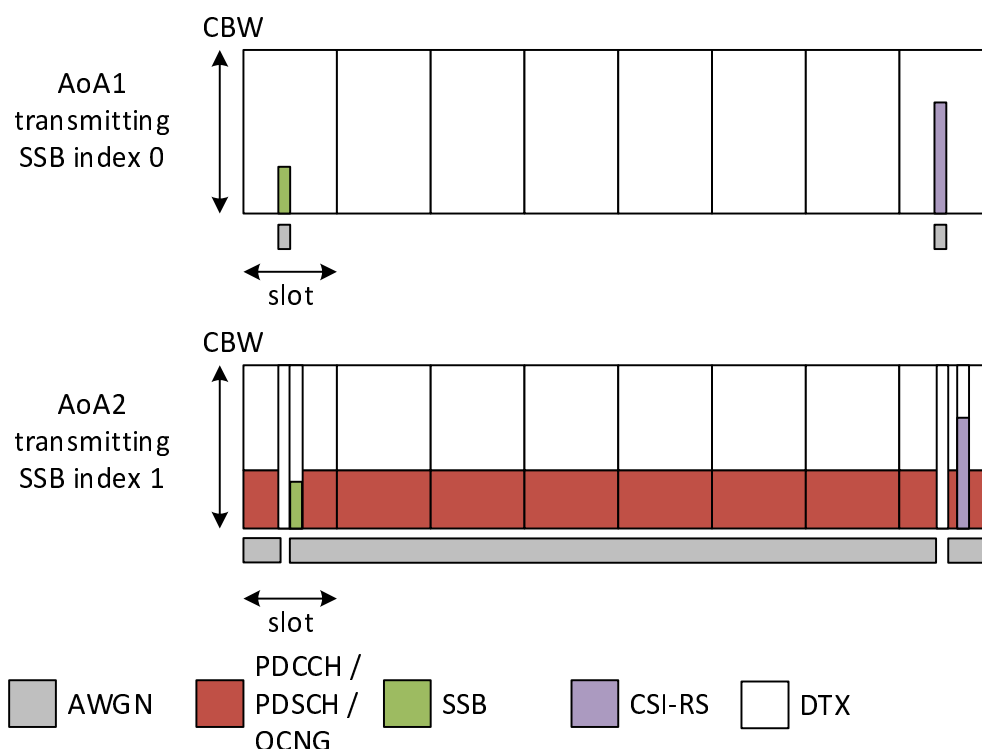


Figure A.7.5.8.1.1-2: Time multiplexed downlink transmissions during T2

A.7.5.8.1.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n , UE shall:

- be able to continue to receive on TCI state 0 till slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe}, \mu}$
- be able to start receiving on TCI state 1 after slot $n + T_{\text{HARQ}} + 5N_{\text{slot}}^{\text{subframe}, \mu} + T_{\text{first-SSB}} / \text{NR slot length}$

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.8.2 RRC based active TCI state switch

A.7.5.8.2.1 NR PCell FR2 active TCI state switch for a known TCI state

A.7.5.8.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10.5. Supported test configuration is shown in Table A.7.5.8.2.1.1-1.

The test scenario comprises of one NR PCell as given in Table A.7.5.8.2.1.1-2. Cell-specific parameters of NR PCell is specified in Table A.7.5.8.2.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.7.5.8.2.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 1 TCI state for PCell, PDCCH-TCI-state0 (QCL'd to SSB0)
- UE is indicated in TCI state0 as the active TCI state

The test consists of two time periods, T1 and T2. Figure A.7.5.8.2.1.1-1 and Figure A.7.5.8.2.1.1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI-state1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280 ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a RRC command indicating a switch to TCI-state1.

The test equipment verifies the TCI state switch time in PCell by scheduling the UE on TCI state 1 after slot $n + (T_{\text{RRC_processing}} + T_{\text{first-SSB}}) / \text{NR slot length} + 2N_{\text{slot}}^{\text{subframe}, \mu}$.

Table A.7.5.8.2.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.8.2.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	2	

Table A.7.5.8.2.1.1-3: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		100 MHz: N _{RB,C} = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTTC Configuration		SMTTC.1
TCI State 0		TC. State.2
TCI State 1		TCI.State.3
reportConfigType		ssb-Index-RSRP

reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	640
timeRestrictionForChannelMeasurements		configured
TRS Configuration		TRS.2.1 TDD TRS.2.2 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		No external noise (Note 2)
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].		

Table A.7.5.8.2.1.1-4: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams ^{Note 6}		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B _{RP} ^{Note 2}	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s/I_{ot_BB}$ ^{Note 7}	dB	8.3	8.3	-Infinity	8.3
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-55.41	-55.41	- Infinity	-55.41
Note 1:	Void				
Note 2:	SS B _{RP} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	Void				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	As observed with 0dBi gain antenna at the center of the quiet zone.				
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				
Note 7:	Calculation of E_s/I_{ot_BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.				

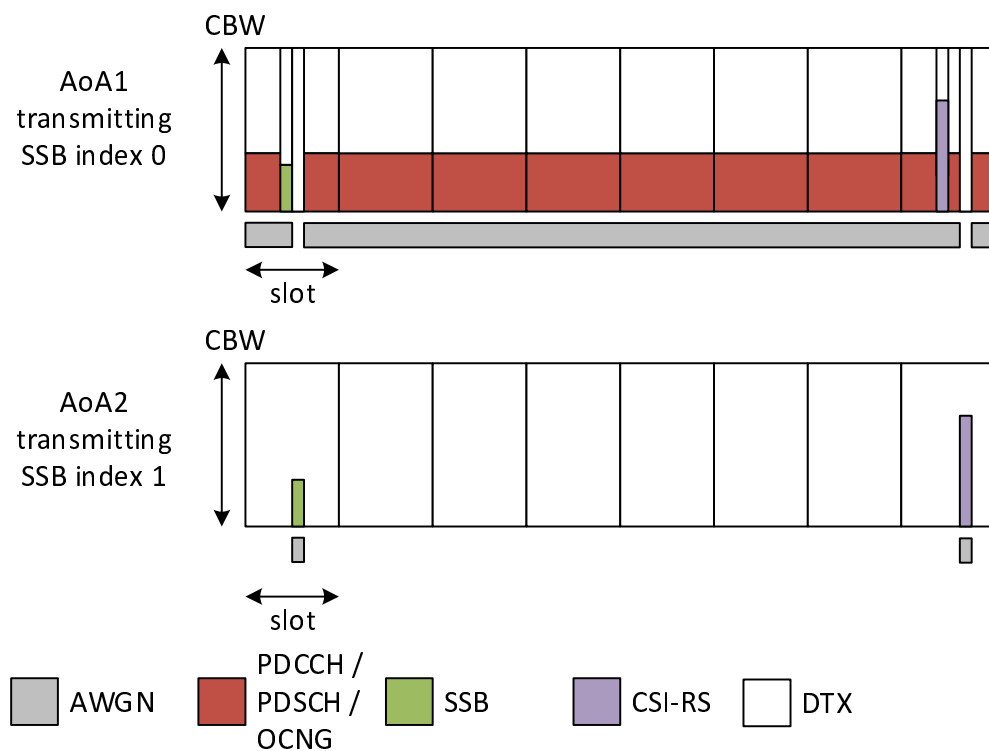


Figure A.7.5.8.2.1.1-1: Time multiplexed downlink transmissions during T1

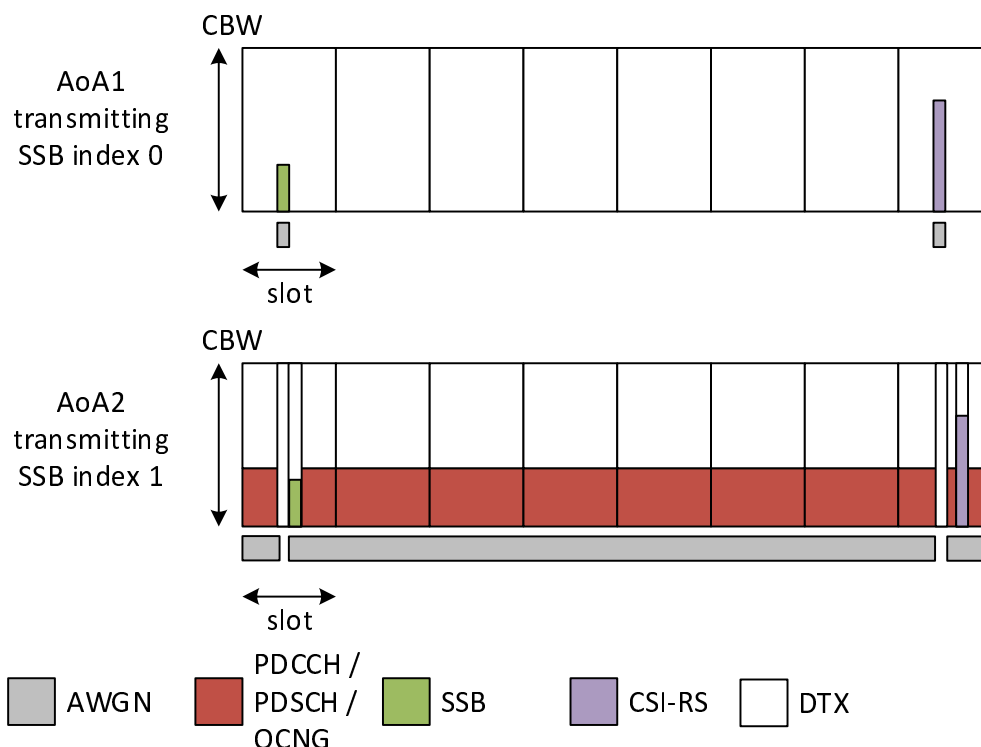


Figure A.7.5.8.2.1.1-2: Time multiplexed downlink transmissions during T2

A.7.5.8.2.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with both SSB0 and SSB1.

After receiving RRC command in slot n , UE shall be able to start receiving on TCI state 1 after slot $n + (T_{\text{RRC_processing}} + T_{\text{first-SSB}}) / \text{NR slot length} + 2N_{\text{slot}}^{\text{subframe},\mu}$.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.8.3 MAC-CE based active TCI state switch for HST FR2 scenario

A.7.5.8.3.1 NR PCell FR2 HST active TCI state switch for a known TCI state

A.7.5.8.3.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10.3A for FR2 power class 6 UE. Supported test configuration is shown in Table A.7.5.8.3.1.1-1. Furthermore, the purpose of this test is also to verify the one shot large timing adjustment requirement specified in clause 7.1.2.3 provided *highSpeedMeasFlagFR2-r17* is configured and *highSpeedLargeOneStepUL-TimingFR2-r17* is enabled for UE supporting FR2 power class 6 and *largeOneStepUL-timingFR2-r17* capability.

The test scenario comprises of one NR PCell (Cell 1) as given in Table A.7.5.8.3.1.1-2. Cell-specific parameters of NR PCell are specified in Table A.7.5.8.3.1.1-3 below. The OTA related test parameters for FR2 are shown in Table A.7.5.8.3.1.1-4. During the test, *highSpeedMeasFlagFR2-r17* is configured to be *set2* and broadcast to UE.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 2 different TCI states for PCell, PDCCH TCI state 0 (QCL'd to SSB0) and TCI state 1 (QCL'd to SSB1), in Cell 1 before starting the test.
- UE is indicated in TCI state 0 as the active PDCCH TCI state

The test consists of two time periods, T1 and T2. Figure A.7.5.8.3.1.1-1 and Figure A.7.5.8.3.1.1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting, which has the relative timing delay compared to TCI state 0 by the absolute value of the one-way differential propagation time $|T_{old} - T_{new}|T_c = 2.33 \mu s$. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280 ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to TCI state 1. *tcI-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state. After the TCI state switch, the UE transmit timing accuracy shall be measured by the test equipment by using the SRS defined in Table A.7.5.8.3.1-5.

The test equipment verifies that

- UE can be scheduled on PCell on TCI state 0 till $n + T_{HARQ} + 3 \text{ ms}$.
- the TCI state switch time in PCell by scheduling the UE on TCI state 1 after slot $n + T_{HARQ} + 3 \text{ ms} + T_{\text{first-SSB}} + T_{\text{SSB-proc}} + T_{\text{rs}} + T_{\text{rs-proc}}$.
- the UE transmission timing immediately after TCI state switch shall follow the requirements as specified in clause 7.1.2.3.

Table A.7.5.8.3.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.8.3.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	0.2	

Table A.7.5.8.3.1.1-3: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		24
Data RBs allocated		DLBWP.0.2

Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TCI.State.0
TCI State 1		TCI.State.1
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AOA1: No external noise (Note 2) AOA2: No external noise (Note 2) with 9722 Hz frequency offset
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].		

Table A.7.5.8.3.1.1-4: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams ^{Note 6}		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SSB_{RP} ^{Note 2}	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s / I_{0_{BB}}$ ^{Note 7}	dB	8.3	8.3	-Infinity	8.3
I_0 ^{Note2}	dBm/95.04 MHz ^{Note4}	-55.41	-55.41	- Infinity	-55.41

Note 1:	Void
Note 2:	SS B _{RP} and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 7:	Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.6-4.

Table A.7.5.8.3.1.1-5: Sounding Reference Symbol Configuration

Field	Value	Comment
c-SRS	16	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=0	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

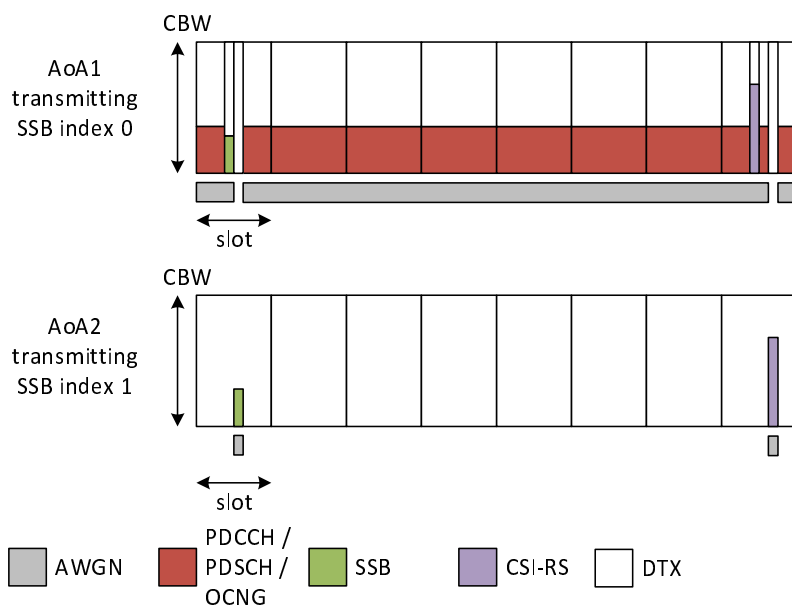


Figure A.7.5.8.3.1.1-1: Time multiplexed downlink transmissions during T1

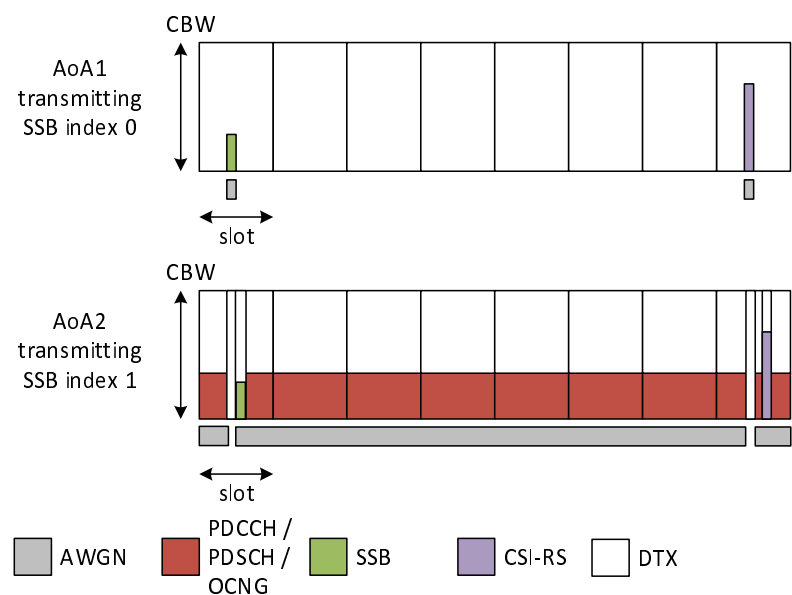


Figure A.7.5.8.3.1.1-2: Time multiplexed downlink transmissions during T2

A.7.5.8.3.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After the TCI state switch, the UE transmission timing immediately after TCI state switch shall follow the requirements as specified in clause 7.1.2.3.

After receiving MAC-CE command in slot n, UE shall:

- be able to continue to receive on TCI state 0 till $n + T_{\text{HARQ}} + 3 \text{ ms}$
- be able to start receiving on TCI state 1 after $n + T_{\text{HARQ}} + 7 \text{ ms} + T_{\text{first-SSB}} + T_{\text{TS}}$

A.7.5.9 Uplink spatial relation switch delay

A.7.5.9.1 MAC-CE based Spatial Relation switch

A.7.5.9.1.1 NR PCell FR2 spatial relation associated with known DL-RS

A.7.5.9.1.1.1 Test Purpose and Environment

The purpose of this test is to verify fulfillment of the uplink spatial relation switch delay requirement defined in clause 8.12.3 by a UE capable of beam correspondence without the need for UL beam sweeping. The supported test configurations are shown in Table A.7.5.9.1.1.1-1.

The test scenario comprises one PCell (Cell 1) as outlined in Table A.7.5.9.1.1.1-2. Cell-specific parameters are provided in Table A.7.5.9.1.1.1-3. OTA-related test parameters are provided in Table A.7.5.9.1.1.1-4.

Throughout the test, PDCCH indicating new transmissions shall be sent continuously on PCell to ensure that the UE will send ACK/NACKs on PUCCH.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with a single TCI state, TCI State-0, which is QCLed with SSB0.
- UE is configured with two spatial relation information configurations Spatial Relation Info-0 and Spatial Relation Info-1 for PUCCH, each associated with SSB0 and SSB1, respectively.
- UE is indicated via MAC-CE activation of *PUCCH-SpatialRelationInfoId* corresponding to Spatial Relation Info-0
- UE is configured with a CSI measurement configuration indicating L1-RSRP measurements on SSB0 and SSB1 with periodic reporting. The L1-RSRP measurement period is influenced by the following: the higher layer parameter *timeRestrictionForChannelMeasurement* is configured, measured SSBs are fully overlapping with SMTC window, and there are no conflicts with measurement gaps.

The test consists of two time periods, T1 and T2. During T1 only the SSB associated with PDCCH TCI state-0 and PUCCH Spatial Relation Info-0 is transmitted. At the beginning of T2, transmission of the SSB associated with PUCCH Spatial Relation Info-1 starts. The UE conducts periodic L1-RSRP measurements and *SSB-Index-RSRP* reporting for SSB0 and SSB1. In slot n , which is within 1280ms after UE receiving both SSB0 and SSB1, and after reporting valid results for both the SSB0 and the SSB1, the UE receives a MAC-CE indicating a switch of spatial relation to PUCCH Spatial Relation Info 1.

The test equipment verifies that the UE transmits according to PUCCH Spatial Relation Info 0 up until slot $n + T_{\text{HARQ}}/\text{NR slot length} + 3N_{\text{slot}}^{\text{subframe},\mu}$, and according to PUCCH Spatial Relation Info 1 from slot $n + T_{\text{HARQ}}/\text{NR slot length} + 3N_{\text{slot}}^{\text{subframe},\mu} + 1$ and onwards.

Table A.7.5.9.1.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.9.1.1.1-2: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	[0.2]	
T2	s	[2]	

Table A.7.5.9.1.1.1-3: NR Cell specific test parameters

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		100 MHz: N _{RB,C} = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State-0 Configuration		TCI.State.0
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
timeRestrictionForChannelMeasurements		configured
TRS Configuration		TRS.2.1 TDD
Spatial Relation Info-0 Configuration		PUCCH.SRI.0
Spatial Relation Info-1 Configuration		PUCCH.SRI.1
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS ^{Note 1}		
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.7.5.9.1.1.1-4: OTA related test parameters

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams ^{Note 6}		Rough			
N _{oc} ^{Note 1}	dBm/15 kHz	-92.1			
N _{oc} ^{Note 1}	dBm/SCS	-83.1			
$\bar{E}_s/N_{oc}$	dB	1		-infinity	1
SS-RSRP ^{Note 2}	dBm/120 kHz ^{Note3}	-82.1		-infinity	-82.1
I _o ^{Note2}	dBm/95.04 MHz ^{Note4}	-50.6		-54.1	-50.6
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 2:	SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	As observed with 0dBi gain antenna at the center of the quiet zone.				
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				

A.7.5.9.1.1.2 Test Requirements

During T2, the UE shall send L1-RSRP report with results for SSB0 and SSB1.

After receiving MAC-CE command in slot n , the UE shall:

- Continue transmitting using PUCCH spatial relation associated with SSB0 up to and including slot $n + T_{HARQ}/NR$ slot length + $3N_{slot}^{subframe,\mu}$
- Start transmitting using PUCCH spatial relation associated with SSB1 from slot $n + T_{HARQ}/NR$ slot length + $3N_{slot}^{subframe,\mu} + 1$ and onwards.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.9.2 RRC based spatial relation switch

A.7.5.9.2.1 NR PCell FR2 spatial relation switch associated with a known DL-RS

A.7.5.9.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the RRC based spatial relation switch delay requirement defined in clause 8.12.5 by a UE capable of beam correspondence without the need for UL beam sweeping. In the test the higher layer parameter *timeRestrictionForChannelMeasurements* is configured. Supported test configuration is shown in Table A.7.5.9.2.1.1-1.

The test scenario comprises of one PCell (Cell 1) as given in Table A.7.5.9.2.1.1-2. Cell-specific parameters of PCell is specified in Table A.7.5.9.2.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.7.5.9.2.1.1-4.

Periodic SRS is transmitted on PCell (Cell 1), and the SRS configuration is SRSCnf.1 given in Table A.5.4.1.1.1-3.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 1 SRS-SpatialRelation0 associated with SSB0.
- UE is indicated SRS-SpatialRelation0 as the active SRS spatial relation.

The test consists of two time periods, T1 and T2. During T1 only SSB0 to which SRS-SpatialRelation0 associated is transmitted. UE shall transmit periodic SRS with SRS-SpatialRelation0 on the UL of the PCell.

T2 start when the tester initiates transmission of SSB1 corresponding to SRS-SpatialRelation1. The UE is configured to transmit periodic L1-RSRP reports.

In slot n , which is within [1280]ms of UE providing the L1-RSRP report with results for both SSB0 and SSB1, the UE receives an RRC command indicating a switch to transmit periodic SRS with target SRS-SpatialRelation1. The UE shall be able to transmit periodic SRS with target spatial relation (SRS-SpatialRelation1) on PCell in slot $n + T_{\text{RRC_processing}}/\text{NR slot length} + 1$.

Table A.7.5.9.2.1.1-1: Supported test configurations

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.9.2.1.1-2: General test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
timeRestrictionForChannel Measurements		configured	Time domain measurement restriction for the channel (signal) measurements (see TS 38.214 [19], clause 5.2.1.1)
T1	s	0.5	
T2	s	1.5	

Table A.7.5.9.2.1.1-3: NR Cell specific test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW_{channel}		100 MHz: $N_{\text{RB,C}} = 66$
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1

PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
SRS-SpatialRelation0		SRS.SRI0
SRS-SpatialRelation1		SRS.SRI1
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	160
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS (Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.7.5.9.2.1.1-4: OTA related test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams ^{Note 6}		Rough		Rough	
N _{oc} ^{Note 1}	dBm/15 kHz	-92.1			
N _{oc} ^{Note 1}	dBm/SCS	-83.1			
Ē _s /N _{oc}	dB	1	1	-Infinity	1
SS-RSRP ^{Note 2}	dBm/120 kHz ^{Note3}	-82.1	-82.1	-Infinity	-82.1
I _o ^{Note2,Note6}	dBm/95.04 MHz ^{Note4}	-50.6	-50.6	-54.1	-50.6
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 2:	SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	As observed with 0dBi gain antenna at the center of the quiet zone.				
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.5.9.2.1.2 Test Requirements

During T1 UE shall send L1-RSRP report with SSB0 to which SRS-SpatialRelation0 is associated. During T2, UE shall send L1-RSRP report with SSB1 to which SRS-SpatialRelation1 is associated.

After receiving RRC command in slot n , UE shall be able to transmit target periodic SRS with SRS-SpatialRelation1 on the PCell in the slot $n + \frac{T_{RRC_processing}}{NR\ slot\ length} + 1$.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.10 UE specific CBW change

A.7.5.10.1 NR FR2 UE specific CBW change of PCell with non-DRX in SA

A.7.5.10.1.1 Test Purpose and Environment

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13. Supported test configurations are shown in Table A.7.5.10.1.1-1.

The test scenario comprises of one PCell (Cell 1) as given in Table A.7.5.10.1.1-2. Cell-specific parameters of PCell are specified in Table A.7.5.10.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK transmission.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PCell).
- UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 of initial condition in PCell.
- UE has been configured with UE-specific CBW (CBW-1)
- UE is indicated in SCS-SpecificCarrier [2] that the UE-specific CBW is CBW-1 as the initial condition in Cell 1 (PCell).

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated CBW configuration, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted i . The UE shall reconfigure its CBW with the updated CBW of final condition (CBW-2).

The UE shall be able to completely receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ as defined in clause 8.13.2 and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1$. The UE shall be continuously scheduled on PCell's BWP-1 on CBW-2 starting from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$.

$T_{RRCprocessingDelay}$ and $T_{CBWchangeDelayRRC}$ are defined in clause 8.13.

The test equipment verifies the UE specific CBW switch time in PCell by counting the time from the time when the RRC Reconfiguration message including updated CBW configurations sent till the time when RRC Reconfiguration Complete message is received.

Table A.7.5.10.1.1-1: UE specific CBW change supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.10.1.1-2: General test parameters for UE specific CBW change in NR SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
T1	s	0.2	

Table A.7.5.10.1.1-3: NR Cell specific test parameters for UE specific CBW change in NR SA

Parameter		Unit	Cell 1
Frequency Range			FR2
Duplex mode			TDD
TDD configuration			TDDConf.3.1
BW _{channel}			100 MHz: N _{RB,c} = 66
Active DL BWP ID			0
Initial DL BWP Configuration (BWP-1)			DLBWP.0.2
Initial UL BWP Configuration (BWP-1)			ULBWP.0.2
Initial Condition	Active DL CBW Configuration (CBW-1)		DLCBW.1.1
	Active UL CBW Configuration (CBW-1)		ULCBW.1.1
Final Condition	Active DL CBW Configuration (CBW-2)		DLCBW.1.2
	Active UL CBW Configuration (CBW-2)		ULCBW.1.2
'PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			

EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.	
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.	
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.	

Table A.7.5.10.1.1-4: OTA related test parameters for UE specific CBW change test case

Parameter		Unit	Cell 2
Angle of arrival configuration			Setup 1 according to table A.3.15
Assumption for UE beams ^{Note 5}			Fine
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/15kHz	-112
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/SCS	-103
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
SS-RSRP ^{Note2}	NR_TDD_FR2_A	dBm/SCS ^{Note3}	-85
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s/I_{ot}$		dB	18
I_o ^{Note2}	NR_TDD_FR2_A	dBm/95.04 MHz ^{Note4}	-56
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 2:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.		
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone		
Note 5:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.		

A.7.5.10.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell from the first DL slot that occurs after the beginning of slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}} + k1$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed PCell UE specific CBW change delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.11 UE UL carrier RRC reconfiguration Delay

A.7.5.11.1 UE UL carrier RRC reconfiguration Delay

A.7.5.11.1.1 Test Purpose and Environment

The purpose of this test is to verify that when the UE receives a RRC message implying NR UL carrier configuration, the UE shall be ready to start transmission on the newly configured carrier within the time limits specified in clause 8.4.2 and 8.4.3 for configuring and deconfiguring, respectively. The test will also verify the interruption at UL carrier configuration requirements on PCell in clause 8.2.2.2.4.

There are two cells: FR2 PCell (Cell 1) on NR RF channel 1 and FR2 SCell (Cell 2) on NR RF channel 2. NR uplink is broadcast by *ServingCellConfigCommonSIB*. The test parameters for PCell and SCell are given in Table A.7.5.11.1.1-1, Table A.7.5.11.1.1-2 and Table A.7.5.11.1.1-3 below. The test consists of three time periods, with duration of T1, T2 and T3 respectively. During time duration T1, NR uplink of Cell 2 is not configured to UE. At the start of T2, a NR uplink of Cell 2 is configured to UE through *RRCReconfiguration*, then UE shall start transmission on the NR uplink of Cell 2. At the start of T3, the NR uplink is released through *RRCReconfiguration*.

The test equipment also verifies that potential interruption of PCell due to UL carrier configuration on SCell is carried out within the correct time span and within the correct length by monitoring ACK/NACK sent in PCell.

Table A.7.5.11.1.1-1: Supported test configurations

Configuration	PCell (Cell 1)	SCell (Cell 2)
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	DL and UL: 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.11.1.1-2: General test parameters for SA UE UL carrier RRC reconfiguration Delay for FR2

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		Config 1	1, 2	Two NR RF channels
Active cell		Config 1	Cell 1: FR2 PCell Cell 2: FR2 SCell	PCell on RF channel number 1 FR2 SCell on RF channel number 2
CP length		Config 1	Normal	
DRX		Config 1	OFF	
Measurement gap pattern Id		Config 1	OFF	

Filter coefficient		Config 1	0	L3 filtering is not used
Cell 2 timing offset to Cell 1	μ s	Config 1	3	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	5	
T3	s	Config 1	5	

Table A.7.5.11.1.1-3: NR Cell specific test parameters for SA UE UL carrier RRC reconfiguration Delay for FR2

Parameter		Unit	Test configuration	Cell 1			Cell 2		
				T1	T2	T3	T1	T2	T3
AoA setup			Config 1	Setup 1 as specified in clause A.3.15					
Beam Assumption ^{Note 7}			Config 1	Rough			Rough		
Frequency Range			Config 1	FR2			FR2		
NR RF Channel Number			Config 1	1			2		
Duplex mode			Config 1	TDD			TDD		
TDD configuration			Config 1	TDDConf.3.1			TDDConf.3.1		
BW _{channel}		MHz	Config 1	100: N _{RB,C} = 66			100: N _{RB,C} = 66		
Data RBs allocated			Config 1	66			66		
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1			DLBWP.0.1		
	Initial UL BWP			ULBWP.0.1			ULBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1			DLBWP.1.1		
	Dedicated UL BWP			ULBWP.1.1			ULBWP.1.1		
OCNG Patterns			Config 1	OP.1			OP.1		
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD			SR.3.1 TDD		
CORESET Reference Channel			Config 1	CR.3.1 TDD			CR.3.1 TDD		
SSB configuration			Config 1	SSB.1 FR2			SSB.1 FR2		
SMTc configuration			Config 1	SMTc.1			SMTc.1		
TRS configuration			Config 1	TRS.2.1 TDD			TRS.2.1 TDD		
TCI state			Config 1	TCI.State.0			TCI.State.0		
PUSCH parameters for NR UL carrier			Config 1	N/A			N/A	G-FR2-A3-4 in [13]	N/A
PUCCH parameters for NR UL carriers			Config 1	N/A			N/A	Table 11.3.2.3.1.2-2 in [13]	N/A
EPRE ratio of PSS to SSS			Config 1	0			0		
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									

EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz Note5	Config 1	-104.7	-104.7
N_{oc} Note2	dBm/SCS Note4	Config 1	-95.7	-95.7
SS-RSRP Note 3	dBm/SCS Note5	Config 1	-88.7	-88.7
$\hat{E}_s/I_{ot}$	dB	Config 1	7	7
$\hat{E}_s/N_{oc}$	dB	Config 1	7	7
I_o Note3	dBm/95.04 MHz Note5	Config 1	-58.92	-58.92
Propagation Condition		Config 1	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Void Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.5.11.1.2 Test Requirements

The UE shall be ready to start transmission on the NR uplink carrier on SCell within 20ms from the start of T2.

The UE shall stop the transmission on the NR uplink carrier on SCell within 20ms from the start of T3.

During T2 and T3, the start of interruption of PCell due to UL carrier configuration or de-configuration on SCell shall not happen outside the UL carrier configuration delay which is 20ms in this test, and the length of interruption shall not exceed the length specified in clause 8.2.2.2.4.

All of the above test requirements shall be fulfilled in order for the observed UE UL carrier configuration delay and UE UL carrier release delay to be counted as correct. The rate of correct observed UE UL carrier configuration delay and UE UL carrier release delay during repeated tests shall be at least 90%.

A.7.5.12 Conditional PSCell addition and release delay (FR2 SA)

A.7.5.12.1 Addition and Release Delay of PSCell

A.7.5.12.1.1 Test purpose and environment

The purpose of this test is to verify that the conditional PSCell addition and release delays under SA are within the requirements stated in clause 8.9A.2.

A.7.5.12.1.2 Test Parameters

The supported test configurations are given in Table A.7.5.12.1.2-1. The test scenario comprises two NR cells, Cell 1 and Cell 2, on radio channel 1 in FR1 and radio channel 2 in FR2, respectively. Test parameters are given in Tables A.7.5.15.1.2-2 and A.7.5.15.1.2-3 below. The test consists of four successive time periods, with time durations of T1, T2, T3, T4, respectively.

At the start of time duration T1, the UE does not have any timing information of cell 2. NR shall configure a condition implying addition to cell 2 during T1, at a time earlier than T_{RRC} before the beginning of T2.

At the start of T2, cell 2 becomes detectable and meets the addition condition. Reception by the test system of the PRACH preamble defines the start of T3.

During T3, the UE shall send periodic CSI reports in PSCell. After having received at least one such report, the test system shall send an RRC message instructing the UE to release the PSCell. Reception by the UE of the RRC message defines the start of T4.

During T4, the UE shall release the PSCell.

Table A.7.5.12.1.2-1: Supported test configurations for FR2 PSCell

Config	Description
1	FR1 FDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
2	FR1 TDD SSB SCS 15kHz BW 10MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
3	FR1 TDD SSB SCS 30kHz BW 40MHz – FR2 TDD SSB SCS 240kHz BW 100MHz
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.7.5.12.1.2-2: General test parameters for conditional PSCell addition and release delay

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test
Active PCell			Cell 1	PCell on RF channel number 1 in FR1
Neighbour cell			Cell 2	Neighbour cell (PSCell-to-be) on RF channel number 2 in FR2
A4	Hysteresis	dB	0	Hysteresis for event A4
	Threshold RSRP	dBm	-118	Threshold for event A4
	Time to Trigger	S	0	Time to trigger for event A4
DRX			OFF	For both PCell and PSCell once activated
Measurement gap pattern ID			0	Gaps are configured before T2 and released before T3.
PRACH configuration in Cell 2			FR2 PRACH configuration 2	PRACH configuration as specified in Clause A.3.8.3.2.
CSI reporting periodicity and offset configuration for Cell 2		ms	2	
T1		s	5	During this time the PCell is known and Cell 2 is unknown.
T2		s	≤ 7	During this time Cell 2 meets the addition condition and UE adds this PSCell.
T3		s	1	During this time the UE sends CSI reports for Cell 2.
T4		s	1	During this time the UE releases the Cell 2.

Table A.7.5.12.1.2-3: NR Cell specific test parameters for conditional PSCell addition and release delay

Parameter	Unit	Config	Cell 1	Cell2			
				T1	T2	T3	T4
Frequency Range		1,2,3	FR1	FR2			
Duplex mode		1	FDD	TDD			
		2,3	TDD				
TDD configuration		1	–	TDDConf.3.1			
		2	TDDConf.1.1				
		3	TDDConf.2.1				
BW _{channel}	MHz	1,2	10: N _{RB,c} = 52	100: N _{RB,c} = 66			
		3	40: N _{RB,c} = 106				
Data RBs allocated		1,2	52	48			
		3	106				
Initial Downlink BWP configuration		1,2,3	DLBWP.0.1	DLBWP.0.1			
Initial Uplink BWP configuration		1,2,3	ULBWP.0.1	ULBWP.0.1			
Dedicated Downlink BWP configuration		1,2,3	DLBWP.1.1	DLBWP.1.1			
Dedicated Uplink BWP configuration		1,2,3	ULBWP.1.1	ULBWP.1.1			
PDSCH Reference Measurement Channel		1	SR.1.1 FDD	SR.3.3 TDD			
		2	SR.1.1 TDD				
		3	SR.2.1 TDD				
TRS configuration		1,2,3	–	TRS.2.1 TDD			
TCI state		1,2,3	–	TCI.State.0			
RMSI CORESET parameters		1	CR.1.1 FDD	CR.3.2 TDD			
		2	CR.1.1 TDD				
		3	CR.2.1 TDD				
Dedicated CORESET parameters		1	CCR.1.1 FDD	CCR.3.7 TDD			
		2	CCR.1.1 TDD				
		3	CCR.2.1 TDD				
OCNG Patterns ^{Note1}		1,2,3	OP.1	OP.3			
SSB configuration		1,2	SSB.1 FR1	SSB.2 FR2			
		3	SSB.2 FR1				
SMTc configuration		1,2,3	SMTc.2	SMTc.1			
PDSCH/PDCCH subcarrier spacing	kHz	1,2	15	120			
		3	30				
EPRE ratio of PSS to SSS	dB	1,2,3	0	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS							
EPRE ratio of OCNG to OCNG DMRS							
Propagation Condition		1,2,3	N/A	No external noise (Note 2)			
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].							

Table A.7.5.12.1.2-4: OTA related test parameters for conditional PSCell addition and release delay

Parameter	Unit	Config	Cell 1	Cell 2			
				T1	T2	T3	T4

Angle of arrival configuration		1,2,3	Link only, see clause A.3.7A	Setup 2a according to clause A.3.15.2.1	
Assumption for UE beams Note 3				Rough	
$\hat{E}_s$	dBm/SCS	1,2,3		$-\infty$	-81
SSB_RP Note1, Note2	dBm/SCS	1,2,3		$-\infty$	-81
$\hat{E}_s / I_{ot\ BB}$ Note1, Note 4	dB	1,2,3		$-\infty$	4.88
I_o Note 1, Note2	dBm/95.04 MHz	1,2,3		N/A	-56.41
Note 1: E_s/I_{ot}, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone. Note 3: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation. Note 4: Calculation of $E_s/I_{ot\ BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_s from TS 38.101-2 [19] Table 6.2.1.3-4.					

A.7.5.12.1.3 Test Requirements

$T_{RRC_delay} + T_{Event_DU}$ occurs during T1 as the addition condition becomes satisfied at the start of T2. The test shall verify that there are no interruptions during T1.

The UE shall start to transmit the PRACH to Cell 2 less than $T_{measure} + T_{UE_preparation} + T_{processing} + T_{\Delta} + T_{PSCell_DU} + 2$ ms = 6720+10+62ms=6792 ms (power class 1) or 4160+10+62ms=4232ms (power classes 2,3 and 4) from the start of T2.

The UE shall transmit at least one periodic CSI report for PSCell during T3.

The UE shall stop transmitting CSI reports for PSCell at latest 20 ms into T4.

All of the above test requirements shall be fulfilled in order for the observed conditional PSCell addition and release delay to be counted as correct. The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.13 Unified TCI state switching delay

A.7.5.13.1 MAC-CE based active joint TCI state switching

A.7.5.13.1.1 NR PCell FR2 active joint TCI state switch for a known TCI state

A.7.5.13.1.1.1 Test Purpose and Environment

The purpose of this test is to verify both active downlink and uplink TCI state switch delay requirement defined in clause 8.15 and 8.16, respectively, by using joint TCI state of unified TCI state switch framework. In this test, the target TCI state is not in the active TCI state list for PDSCH/PDCCH, and UE is capable of beam correspondence without the need for UL beam sweeping, i.e. *beamCorrespondenceWithoutUL-BeamSweeping* is set to 1. Supported test configuration is shown in Table A.7.5.13.1.1.1-1.

The test scenario comprises of one NR PCell (Cell 1) as given in Table A.7.5.13.1.1.1-2. Cell-specific parameters of NR PCell are specified in Table A.7.5.13.1.1.1-1 below. The OTA related test parameters for FR2 are shown in Table A.7.5.13.1.1.1-2.

Table A.7.5.13.1.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.13.1.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
Number of RS for L1-RSRP reporting		2	Two source RSs in TCI state 0 and 1.
T1	s	0.2	
T2	s	2	

A.7.5.13.1.1.2 Test parameters

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.
- UE is provided with *dl-OrJoint-TCIStateList-r17* and UE's higher layer signalling *unifiedTCI-StateType-r17* in IE *MIMOParam-r17* is set to *joint*;
- UE is configured with 2 different joint TCI states for PCell, TCI state 0 (QCL'd to SSB0) and TCI state 1 (QCL'd to SSB1), and the TCI state 1 is not in the active TCI state list for PDSCH/PDCCH.
- UE is indicated TCI state 0 as the active PDCCH TCI state

The test consists of two time periods, T1 and T2. During T1 only source RS in TCI state 0 is transmitted. At the beginning of T2, source RS in TCI state 1 start transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms after the slot in which UE provides L1-RSRP report with results for both source RSs in TCI state 0 and 1, UE receives a MAC-CE command indicating a switch to TCI state 1. *tcj-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

The test equipment verifies the following UE behavior for joint TCI state switch:

- UE shall be able to receive and transmit with TCI state 0 until slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$, and
- receive and transmit with TCI state 1 from slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{first_target-PL-RS}} + 4 * T_{\text{target_PL-RS}} + 2\text{ms}) / \text{NR slot length}$

Table A.7.5.13.1.1.2-1: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		100 MHz: $N_{\text{RB},c} = 66$
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2

Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
PL-RS Configuration (CSI-RS#1)		Resource #4 in TRS.2.1 TDD for DLorJoint TCI.State.2 and DLorJoint TCI.State.3
TCI State 0		DLorJoint TCI.State.2
TCI State 1		DLorJoint TCI.State.3
TRS Configuration		TRS.2.1 TDD for DLorJoint TCI.State.2 TRS 2.2 TDD for DLorJoint TCI.State.3
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		No external noise (Note 2)
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].		

Table A.7.5.13.1.1.2-2: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 1			
		Source RS in TCI state 0		Source RS in TCI state 1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams ^{Note 6}		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B RP ^{Note 2}	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s/I_{\alpha BB}$ ^{Note 7}	dB	8.3	8.3	-Infinity	8.3
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-56.0	-56.0	- Infinity	-56.0

Note 1:	Void
Note 2:	SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the center of the quiet zone.
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 7:	Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.5.13.1.1.3 Test Requirements

The test verifies that UE can be scheduled by PCell on TCI state 0 and TCI state 1.

During T2, UE shall send L1-RSRP report with results for source RSs in both TCI state 0 and 1.

After receiving MAC-CE command in slot n , UE shall:

- be able to receive and transmit with TCI state 0 until $\text{slot } n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$
- be able to start receiving and transmitting with TCI state 1 after $\text{slot } n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{first_target-PL-RS}} + 4 \cdot T_{\text{target_PL-RS}} + 2\text{ms}) / NR \text{ slot length}$

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.13.2 MAC-CE based active uplink TCI state switch

A.7.5.13.2.1 NR FR2 PCell uplink TCI state switch for a known TCI state

A.7.5.13.2.1.1 Test Purpose and Environment

The purpose of this test is to verify fulfillment of the uplink TCI switch delay requirement defined in clause 8.16.3 by a UE capable of beam correspondence without the need for UL beam sweeping. The test scenario comprises one PCell (Cell 1).

Throughout the test, PDCCH indicating new transmissions shall be sent continuously on PCell to ensure that the UE will send ACK/NACKs on PUCCH.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with a unified DL TCI state, TCI State-0, and SSB0 is configured as QCL source for the TCI state. At the start of test UE is connected to DL TCI state 0.
- UE is configured with 2 UL TCI states, UL TCI state 0 and UL TCI state 1. QCL info to UL TCI state 0 and 1 is provided by SSB0 and SSB1, respectively. Initially only UL TCI 0 is in the active TCI states.
- PL-RS is configured for each of the UL TCI states. CSI-RS 0 and CSI-RS 1 are associated with UL TCI state 0 and 1 respectively as PL-RS.
- At the start of the test UE connected to DL TCI state 0 and UL TCI state 0.

Index of CSI-RS#1 is configured for UE as PUSCH-PathlossReferenceRS-Id-r17 which is indicated in TCI-UL-State-r17 of uplink TCI state 1. CSI-RS#1 is QCLed typeD with SSB#1. UE does not maintain CSI-RS#1 as pathloss RS before the uplink TCI state switching.

The test consists of two time periods, T1 and T2. During T1, only the SSB associated with DL TCI state-0 and UL TCI state 0 is transmitted. At the beginning of T2, transmission of the SSB 1 associated with UL TCI state 1 starts. The UE conducts periodic L1-RSRP (i.e., *SSB-Index-RSRP*) reporting for SSB0 and SSB1. In slot n , which is within 1280ms after UE receiving both SSB0 and SSB1, and after reporting valid results for both the SSB0 and the SSB1, the UE receives a MAC-CE indicating a TCI state switch to UL TCI state 1.

The test equipment verifies that the UE transmits according to UL TCI state 0 up until slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$, and according to UL TCI state 1 from slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + \text{NM} * (T_{\text{first_target_PL-RS}} + 4 * T_{\text{target_PL-RS}} + 2\text{ms}) / \text{NR slot length}$ and onwards. NM is equal to 1. Where, T_{HARQ} (in slot) is the timing between DL data transmission and acknowledgement as specified in TS 38.213 [3].

A.7.5.13.2.1.2 Test parameters

The supported test configurations are provided in Table A.7.5.13.2.1.2-1.

General test parameters are provided in Table A.7.5.13.2.1.2-2.

Cell-specific parameters are provided in Table A.7.5.13.2.1.2-3.

OTA-related test parameters are provided in Table A.7.5.13.2.1.2-4.

Table A.7.5.13.2.1.2-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.5.13.2.1.2-2: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	0.2	
T2	s	2	

Table A.7.5.13.2.1.2-3: NR Cell specific test parameters

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		100 MHz: N _{RB,C} = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD

RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
DL TCI State		DLorJoint TCI.State.0
PL-RS Configuration for CSI-RS#0		Resource #4 in TRS.2.1 TDD for UL TCI.State.2
PL-RS Configuration for CSI-RS#1		Resource #4 in TRS.2.2 TDD for UL TCI.State.3
UL TCI State-0 Configuration		UL TCI.State.2
UL TCI State-1 Configuration		UL TCI.State.3
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
timeRestrictionForChannelMeasurements		configured
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS ^{Note 1}		
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.7.5.13.2.1.2-4: OTA related test parameters

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams ^{Note 6}		Rough			
N _{oc} ^{Note 1}	dBm/15 kHz	-92.1			
N _{oc} ^{Note 1}	dBm/SCS	-83.1			
Ê _s /N _{oc}	dB	1		-infinity	1
SS-RSRP ^{Note 2}	dBm/120 kHz ^{Note3}	-82.1		-infinity	-82.1
I _o ^{Note2}	dBm/95.04 MHz ^{Note4}	-55.0		-58.5	-55.0
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.					
Note 2: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.					
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.					

A.7.5.13.2.1.3 Test Requirements

During T2, the UE shall send L1-RSRP report with results for SSB0 and SSB1.

After receiving MAC-CE command in slot n , the UE shall:

- Continue transmitting using UL TCI state 0 up to and including slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$
- Start transmitting using UL TCI state 1, from slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{first_target_PL-RS}} + 4 \cdot T_{\text{target_PL-RS}} + 2\text{ms}) / \text{NR slot length}$ and onwards.

The rate of correct events observed during repeated tests shall be at least 90%

A.7.5.13.3 MAC-CE based active downlink TCI state switch

A.7.5.13.3.1 NR PCell FR2 active downlink TCI state switch to cell with additional PCI for a known TCI state

A.7.5.13.3.1.1 Test Purpose and Environment

The purpose of this test is to verify the MAC-CE based active downlink TCI state switch delay requirement defined in clause 8.15.3. Supported test configuration is shown in Table A.7.5.13.3.1.1-1.

Table A.7.5.13.3.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

A.7.5.13.3.1.2 Test Parameters

The test scenario comprises of one NR PCell (Cell 1) and one NR cell as the cell with additional PCI (Cell 2), as given in Table A.7.5.13.3.1.2-1. Cell-specific parameters of NR PCell and the cell with additional PCI are specified in Table A.7.5.13.3.1.2-2 below. The OTA related test parameters for FR2 are shown in Table A.7.5.13.3.1.2-3.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is provided with *dl-OrJoint-TCIStateList-r17* and UE's higher layer signalling *unifiedTCI-StateType-r17* in IE *MIMOParam-r17* is set to *separate*.
- UE is configured with SSB-based L1-RSRP measurements on cell with additional PCI (Cell 2)
- UE is configured with 2 different TCI states for PCell, TCI state 0 (QCL'd to TRS resource set 1, TCI state of which is QCLed to SSB0 of Cell1) and TCI state 1 (QCL'd to TRS resource set 2, TCI state of which is QCLed to SSB1 of Cell2), in Cell 1 before starting the test.
- UE is indicated in TCI state 0 as the active TCI state

The test consists of two time periods, T1 and T2. Figure A.7.5.13.3.1.2-1 and Figure A.7.5.13.3.1.2-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 of Cell 1 and SSB1 of Cell 2, UE receives a MAC-CE

command indicating a switch to TCI state 1. *tci-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

The test equipment verifies that UE can be scheduled on PCell on TCI state 0 till slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu}$. The test equipment also verifies the TCI state switch time in PCell by scheduling the UE on TCI state 1 after slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe},\mu} + (T_{\text{first-SSB}} + T_{\text{SSB-proc}})/\text{NR slot length}$.

Table A.7.5.13.3.1.2-1: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Cell with additional PCI		Cell 2	Neighbour cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0 of Cell1, SSB1 of Cell2	L1-RSRP measurements of SSB0 and SSB1.
Number of RS for L1-RSRP reporting		2	Two source RSs in TCI state 0 and 1.
Cell2 timing offset to cell1	us	<CP	
T1	s	0.2	
T2	s	2	

Table A.7.5.13.3.1.2-2: NR Cell specific test parameters for TCI state switch to a cell with additional PCI

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		100 MHz: N _{RB,C} = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3. 2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP. 5
SSB Configuration		SSB.1 FR2 for SSB0 of Cell 1 and SSB1 of Cell 2
SMTC Configuration		SMTC.1
DL TCI State 0		DLorJoint TCI.State.0
DL TCI State 1		DLorJoint TCI.State.1
TRS Configuration		TRS.2.1 TDD for DLorJoint TCI.State.0 TRS.2.2 TDD for DLorJoint TCI.State.1
Pathloss RS Configuration		Resource #4 in TRS.2.1 TDD
reportQuantity for SSB		ssb-Index-RSRP-Index-r17
reportConfigType for SSB		periodic
Correlation Matrix and Antenna Configuration		1x2 Low

EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		No external noise (Note 2)
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].		

Table A.7.5.13.3.1.2-3: OTA related test parameters for TCI state switch to a cell with additional PCI

Parameter	Unit	Cell 1		Cell 2	
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams ^{Note 6}		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SS B _{RP} ^{Note 2}	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s/I_{ot\ BB}$ ^{Note 7}	dB	8.3	8.3	-Infinity	8.3
I_{O} ^{Note2}	dBm/95.04 MHz ^{Note4}	-56.0	-56.0	- Infinity	-56.0
Note 1:	Void				
Note 2:	SS B _{RP} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	Void				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	As observed with 0dBi gain antenna at the center of the quiet zone.				
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				
Note 7:	Calculation of $E_s/I_{ot\ BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.				

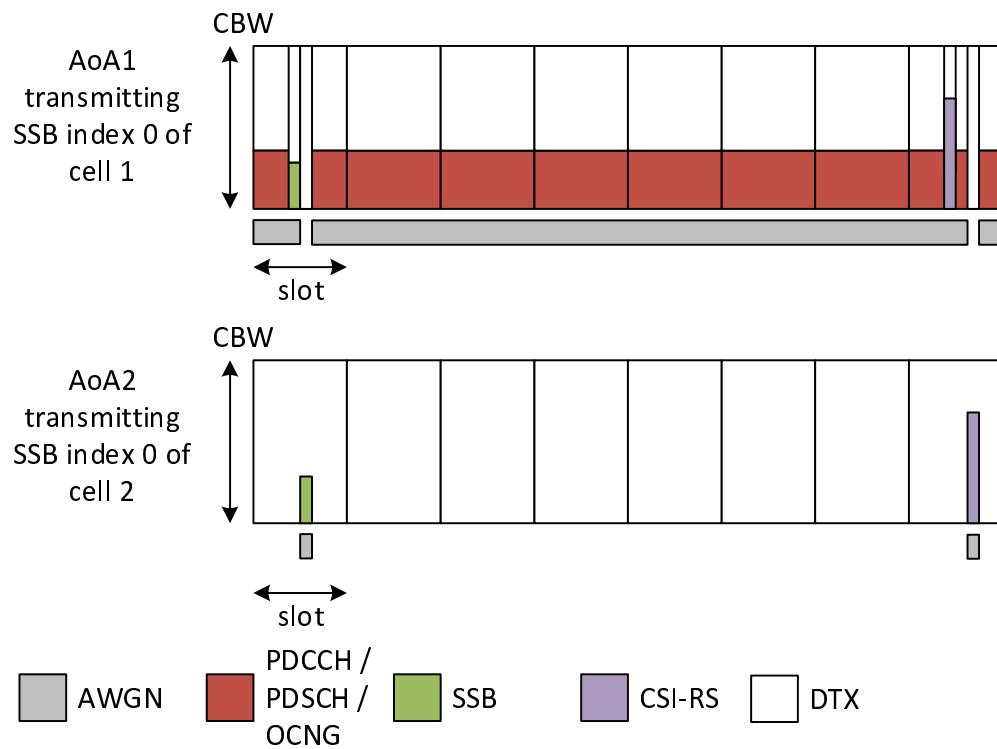


Figure A.7.5.13.3.1.2-1: Time multiplexed downlink transmissions during T1

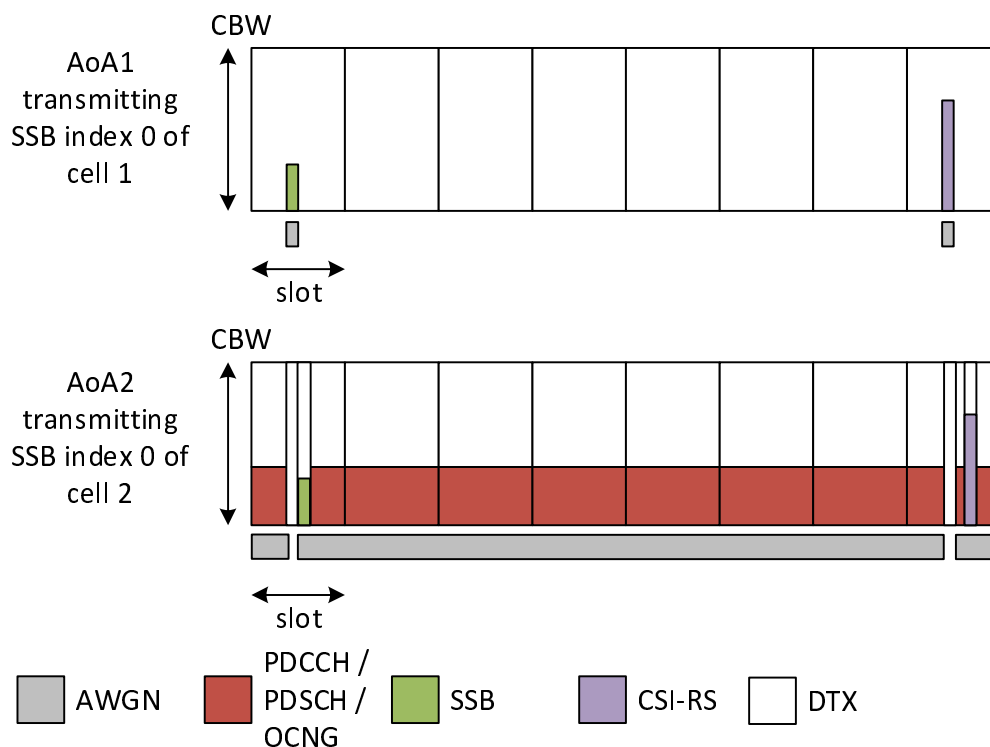


Figure A.7.5.13.3.1.2-2: Time multiplexed downlink transmissions during T2

A.7.5.13.3.1.3 Test Requirements

During T2, UE shall send L1-RSRP report with results for both SSB0 of Cell 1 and SSB1 of Cell 2.

After receiving MAC-CE command in slot n , UE shall:

- be able to continue to receive on DL TCI state 0 till slot $n + T_{\text{HARQ}} + 3N_{\text{slot}}^{\text{subframe}, \mu}$
- be able to start receiving on DL TCI state 1 after slot $n + T_{\text{HARQ}} + (5 \text{ ms} + T_{\text{first-SSB}}) / \text{NR slot length}$

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.5.14 PSCell RACH-less based Activation and deactivation for FR1+FR2 inter-band with target PSCell in FR2

A.7.5.14.1 Test Purpose and Environment

The purpose of this test case is to test the activation PSCell delay for a UE configured with one deactivated SCG in NR-DC and when PSCell in one SCG is being activated. The test also tests the deactivation delay. The test case tests the requirements within which the UE shall be able to activate the deactivated SCG in section 8.17.2 for RACH-less based conditions when PSCell and TCI state are known. The PCell is in NR FR1 and the PSCell is in NR FR2.

The supported test configurations are defined in Table A.7.5.14.1-1. The test parameters for NR cell are given in Tables A.7.5.14.1-2. And cell specific test parameters are described in Tables A.7.5.14.1-3. OTA related test parameters are defined in Table A.7.5.14.1-4.

At the beginning of T1 the UE is configured with a PSCell which is activated. At T1 the PSCell is deactivated. PSCell is configured with *bfd-and-RLM* with value *true*.

An RRC message for activation of PSCell is sent by the test equipment 1s after the RRC message deactivating the PSCell, in a slot # denoted m. The point in time at which the RRC message for activation of PSCell is received at the UE defines the start of time period T2.

During T2, the test equipment monitors for SR from the UE on the PSCell. The time when test equipment receives a scheduling request from the UE is denoted as slot T3.

Time period T4 starts when a RRC message for deactivation of the PSCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of the PSCell, respectively.

The test equipment verifies the activation time by when the SR from the UE is received in the activated PSCell.

The test equipment verifies the deactivation time by counting the slots from the time when the PSCell deactivation command is sent until UL transmission from the PSCell is discontinued.

Table A.7.5.14.1-1: Supported test configurations for FR2 PSCell activation case

Configuration	Description
1	PCell: 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode Target PSCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	PCell: 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode Target PSCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target PSCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.7.5.14.1-2: General Test Parameters for FR2 PSCell activation and deactivation

TBD

Table A.7.5.14.1-3: Cell specific test parameters for FR2 PSCell activation case

Parameter ^{Note 5}		Unit	Cell 1				Cell 2			
			T1	T2	T3	T4	T1	T2	T3	T4
SSB ARFCN			Freq1				Freq2			
Duplex mode	Config 1		FDD				TDD			
	Config 2,3		TDD							
TDD configuration	Config 1		Not Applicable				TDDConf.3.1			
	Config 2		TDDConf.1.1							
	Config 3		TDDConf.2.1							
Downlink initial BWP Configuration	Config 1,2,3		DLBWP.0.1							
Downlink dedicated BWP Configuration	Config 1,2,3		DLBWP.1.1							
Uplink initial BWP configuration	Config 1,2,3		ULBWP.0.1							
Uplink dedicated BWP configuration	Config 1,2,3		ULBWP.1.1							
TRS configuration	Config 1,2,3		N/A				TRS.2.1 TDD			
TCI state	Config 1,2,3		TCI.State.0							
BW _{channel}	Config 1,2	MHz	10: N _{RB,c} = 52				100: N _{RB,c} = 66			
	Config 3		40: N _{RB,c} = 106							
Data RBs allocated	Config 1.2		52	66	66	52	66	52	52	66

	Config 3		106			106		106	106	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD				-			
	Config 2		SR.1.1 TDD							
	Config 3		SR.2.1 TDD							
RMSI CORESET Parameters	Config 1		CR.1.1 FDD				-			
	Config 2		CR.1.1 TDD							
	Config 3		CR.2.1 TDD							
Dedicated CORESET Parameters	Config 1		CCR.1.1 FDD				-			
	Config 2		CCR.1.1 TDD							
	Config 3		CCR.2.1 TDD							
OCNG Patterns			OP.1							
SSB configuration	Config 1,2		SSB.1 FR1				SSB.3 FR2			
	Config 3		SSB.2 FR1							
CSI-RS configuration for CSI reporting	Config 1~3		N/A				CSI-RS.3.1 TDD			
reportConfigType for CSI reporting			periodic				N/A			
reportConfigType for L1-RSRP			periodic				N/A			
reportQuantity for CSI reporting			cri-RI-PMI-CQI				N/A			
reportQuantity for L1-RSRP			ssb-Index-RSRP				N/A			
CSI reporting periodicity	Config 1,2	slot	5				N/A			
	Config 3		10							
L1-RSRP reporting periodicity ^{Note 7}	Config 1,2	slot	5				N/A			
	Config 3		10							
CSI reporting offset	Config 1,2	slot	2				N/A			
	Config 3		4							
L1-RSRP reporting offset	Config 1,2	slot	2				N/A			
	Config 3		4							
SMTC configuration			SMTC.1							
EPRE ratio of PSS to SSS		dB	0							
EPRE ratio of PBCH_DMRS to SSS										
EPRE ratio of PBCH to PBCH_DMRS										
EPRE ratio of PDCCH_DMRS to SSS										
EPRE ratio of PDCCH to PDCCH_DMRS										
EPRE ratio of PDSCH_DMRS to SSS										
EPRE ratio of PDSCH to PDSCH_DMRS										
EPRE ratio of OCNG DMRS to SSS ^{Note 1}										
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}										
Propagation conditions			N/A Link only, see clause A.3.7A				AWGN			
Scheduling request resource priodicity		ms	N/A				20			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.										
Note 2: Void										
Note 3: Void										
Note 4: Void										
Note 5: All parameters apply for configuration 1, 2 and 3										
Note 6: Void.										
Note 7: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.										

Table A.7.5.14.1-4: OTA related test parameters for FR1 PCell with FR2 PSCell activation case

Parameter	Unit	Cell 1				Cell 2			
		T1	T2	T3	T4	T1	T2	T3	T4

Angle of arrival configuration			N/A	According to clause A.3.15.1
Assumption for UE beams ^{Note 7}			N/A	Rough
N_{OC} ^{Note 1}	Config 1,2,3	dBm/15kHz	Link only, see clause A.3.7A	-104.7
N_{OC} ^{Note 1}	Config 1,2,3	dBm/SCS		-95.7
$\hat{E}_s / N_{oc}$	Config 1,2,3	dB		7
E_s / I_{ot}	Config 1,2,3	dB		7
SSB_RP ^{Note 2, Note 4}	Config 1,2,3	dBm/SCS		-88.7
I_o ^{Note 2, Note 4}	Config 1,2,3	dBm/95.04 MHz		-58.92
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: E_s/I_{ot} , SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3: Void				
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone				
Note 5: Void				
Note 6: Void				
Note 7: Information about types of UE beam is given in B.2.1.3 and does not imit UE implementation or test system implementation.				

A.7.5.14.2 Test Requirements

During T2 the UE shall send the first SR on PSCell in the first available uplink SR resource no later than T3 which is:

$$T_{RRC_delay} + T_{processing} + T_{search} + T_{\Delta} + T_{IU} + 2 \text{ ms}$$

as defined on section 8.17.2. In this test case:

$$T_{processing} = 5\text{ms (no RRC parameter has been modified),}$$

$$T_{search} = 0\text{ms (RACH-less based PSCell activation, with RLM and BFD are configured, PSCell and TCI state are known), and}$$

$$T_{\Delta} = 20\text{ms.}$$

This allows T3 of $[T_{RRC_delay} + T_{IU} + 27]\text{ms}$

During T4 the UE shall stop all transmissions on the PSCell no later than in slot $n + \frac{T_{RRC_delay}}{NR \text{ slot length}}$ as defined in 8.17.3.

During T2 the interruption of PCell during PSCell activation shall not happen outside the slot $m + T_{RRC_delay}$.

During T4 the interruption of PCell during PSCell deactivation shall not happen outside the slot $n + T_{RRC_delay}$.

The interruption duration on PCell due to activation and deactivation of PSCell shall not be more than the values specified for in Clause 8.17.2 and 8.17.3.

A.7.6 Measurement procedure

A.7.6.1 Intra-frequency Measurements

A.7.6.1.1 SA event triggered reporting test without gap under non-DRX

A.7.6.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.1.1-1.

Table A.7.6.1.1.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.1.1-2, A.7.6.1.1.1-3 and A.7.6.1.1.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.1.1.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		1, 2	SMTC.1	
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μ s	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.7.6.1.1.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1	24		24	
		2	48		48	

Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Active DL BWP configuration		1, 2	DLBWP.1.1	DLBWP.1.1
Active UL BWP configuration		1, 2	ULBWP.1.1	ULBWP.1.1
RLM-RS		1, 2	SSB	SSB
PDSCH RMC configuration		1	SR.3.2 TDD	N/A
		2	SR.3.3 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
		2	CR.3.2 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
		2	CCR.3.7 TDD	N/A
TRS configuration		1, 2	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1, 2	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	120
OCNG Patterns		1, 2	OP.5	N/A
cellIndividualOffset	dB	1~2	N/A	16
SSB		1	SSB.1 FR2	SSB.7 FR2
		2	SSB.2 FR2	SSB.8 FR2
Propagation Condition		1, 2	No external noise (Note 1)	No external noise (Note 1)
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

Table A.7.6.1.1.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam assumption ^{Note 4}		1,2	Rough		Rough	
E _s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
I _o	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1, 2	Defined in Figure A.7.6.1.1.1-1			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Void						
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 5: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.						

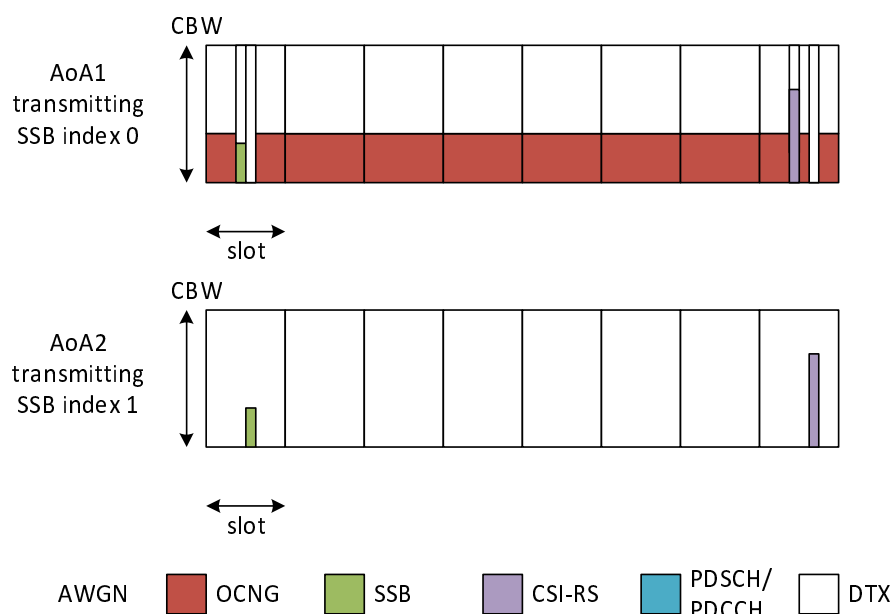


Figure A.7.6.1.1.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.7.6.1.1.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 2.4s for a UE supporting power class 1,
- 1.44s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.2 SA event triggered reporting test without gap under DRX

A.7.6.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.2.1-1.

Table A.7.6.1.2.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.2.1-2 ~ 6.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.1.2.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	PCell (Cell 1)		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2		One TDD carrier frequency is used for the NR cells.
SMTC configuration		1, 2	SMTC.1		
A3-Offset	dB	1, 2	-6		
CP length		1, 2	Normal		
Hysteresis	dB	1, 2	0		
Time To Trigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.1	DRX.7	DRX related parameters are defined in Table A.7.6.1.2.1-5
Time offset between Cell 1 and Cell 2		1, 2	3 μ s		Synchronous cells
T1	s	1, 2	5		
T2	s	1, 2	10	52	

Table A.7.6.1.2.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1, 2	66		66	
Intial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2	CCR.3.7 TDD		N/A	
TRS configuration		1, 2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120		120	
OCNG Patterns		1, 2	OP.1		OP.1	
SSB		1	SSB.3 FR2		SSB.3 FR2	
		2	SSB.4 FR2		SSB.4 FR2	
Propagation Condition		1, 2	AWGN		AWGN	

Table A.7.6.1.2.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 1 defined in A.3.15.1			
Beam assumption ^{Note 4}		1,2	Rough		Rough	
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	3.77	-1.52	-Infinity	-1.52
N_{oc} Note 2	dBm/15 KHz	1, 2	-98			
N_{oc} Note 2	dBm/SCS	1	-89			
		2	-86			
SSB _{RP}	dBm/SCS	1	-85	-85	-Infinity	-85
		2	-82	-82	-Infinity	-82
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
I_o	dBm/95.04MHz	1, 2	-54.53	-52.18	See Cell 1 columns	

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
Note 5:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

Table A.7.6.1.2.1-5: Void**Table A.7.6.1.2.1-6: Void**

A.7.6.1.2.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 7.2s for a UE supporting power class 1,
- 4.32s for a UE supporting power class 2, 3 and 4

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.2s for a UE supporting power class 1,
- 30.72s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.3 SA event triggered reporting test with per-UE gaps under non-DRX

A.7.6.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.3.1-1.

Table A.7.6.1.3.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.3.1-2 ~ 4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.1.3.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Gap type		1, 2	Per-UE gaps	
Measurement gap repetition periodicity	ms	1, 2	40	
Measurement gap length	ms	1, 2	6	
Measurement gap offset	ms	1, 2	39	
SMTC configuration		1, 2	SMTC.1	
CSI-RS parameters		1, 2	CSI-RS.3.2 TDD resource #0	Resource #1 is not used
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μ s	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.7.6.1.3.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1	24		24	
		2	48		48	
Intial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2	CSI-RS		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2	CR.3.2 TDD		N/A	

Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
		2	CCR.3.7 TDD	N/A
TRS configuration		1, 2	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1, 2	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	120
OCNG Patterns		1, 2	OP.5	N/A
cellIndividualOffset	dB	1~2	N/A	16
SSB		1	SSB.3 FR2	SSB.7 FR2
		2	SSB.4 FR2	SSB.8 FR2
Propagation Condition		1, 2	No external noise (Note 1)	No external noise (Note 1)
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

Table A.7.6.1.3.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam Assumption ^{Note 4}		1,2	Rough		Rough	
E _s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
$\hat{E}_s/I_{ot}$ ^{BB Note 5}	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
I _o	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1	Defined in Figure A.7.6.1.3.1-1			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Void						
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 5: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.						

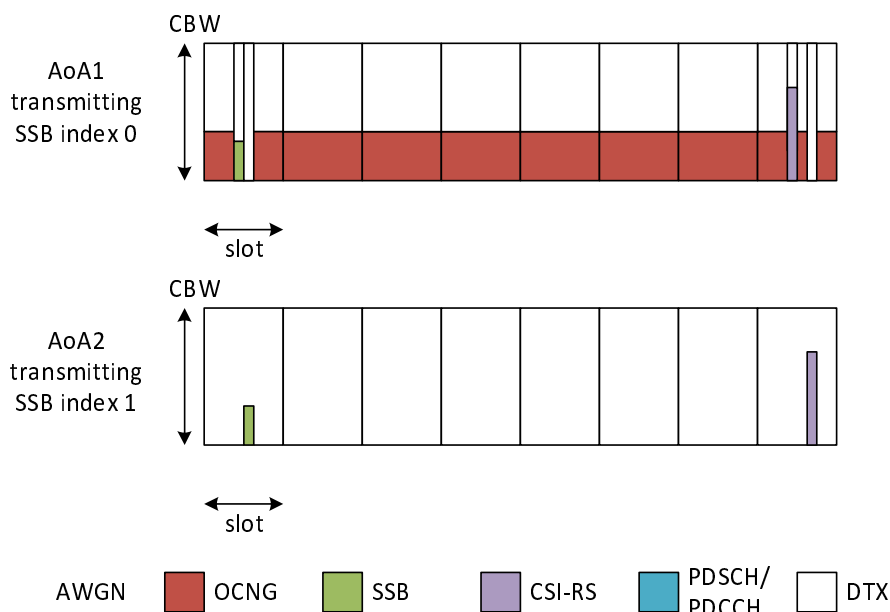


Figure A.7.6.1.3.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.7.6.1.3.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 3.2s for a UE supporting power class 1,
- 1.92s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.4 SA event triggered reporting test with per-UE gaps under DRX

A.7.6.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.4.1-1.

Table A.7.6.1.4.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.4.1-2, A.7.6.1.4.1-3 and A.7.6.1.4.1-4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.1.4.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	PCell (Cell 1)		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2		One TDD carrier frequency is used for the NR cells.
Gap type		1, 2	Per-UE gaps		
Measurement gap repetition periodicity	ms	1, 2	40		
Measurement gap length	ms	1, 2	6		
Measurement gap offset	ms	1, 2	39		
SMTC configuration		1, 2	SMTC.1		
CSI-RS parameters		1, 2	CSI-RS.3.2 TDD resource #0		Resource #1 is not used
A3-Offset	dB	1, 2	-6		
CP length		1, 2	Normal		
Hysteresis	dB	1, 2	0		
Time To Trigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.1	DRX.7	DRX related parameters are defined in Table A.7.6.1.2.1-5
Time offset between Cell 1 and Cell 2		1, 2	3 μ s		Synchronous cells
T1	s	1, 2	5		
T2	s	1, 2	10	52	

Table A.7.6.1.4.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1, 2	66		66	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	

Active DL BWP configuration		1, 2	DLBWP.1.2	DLBWP.1.1
Active UL BWP configuration		1, 2	ULBWP.1.2	ULBWP.1.1
RLM-RS		1, 2	SCSI-RS	SSB
PDSCH RMC configuration		1	SR.3.2 TDD	N/A
		2	SR.3.3 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
		2	CR.3.2 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
		2	CCR.3.7 TDD	N/A
TRS configuration		1, 2	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI state		1, 2	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	120
OCNG Patterns		1, 2	OP.1	OP.1
SSB		1	SSB.3 FR2	SSB.3 FR2
		2	SSB.4 FR2	SSB.4 FR2
Propagation Condition		1, 2	AWGN	AWGN

Table A.7.6.1.4.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 1 defined in A.3.15.1			
Beam Assumption ^{Note 4}		1,2	Rough			
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	3.77	-1.52	-Infinity	-1.52
N_{oc} Note 2	dBm/15 KHz	1, 2	-98			
N_{oc} Note 2	dBm/SCS	1	-89			
		2	-86			
SSB_RP	dBm/SCS	1	-85	-85	-Infinity	-85
		2	-82	-82	-Infinity	-82
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
I_o	dBm/95.04MHz	1,2	-54.53	-52.18	See Cell 1 columns	
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					
Note 5:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.					

Table A.7.6.1.4.1-5: Void**Table A.7.6.1.4.1-6: Void****A.7.6.1.4.2 Test Requirements**

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 7.2s for a UE supporting power class 1,
- 4.32s for a UE supporting power class 2, 3 and 4

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.2s for a UE supporting power class 1,
- 30.72s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.5 SA event triggered reporting test without gap under non-DRX for UE configured with *highSpeedMeasFlagFR2-r17*

A.7.6.1.5.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements for FR2 power class 6 UE configured with *highSpeedMeasFlagFR2-r17* in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.5.1-1.

Table A.7.6.1.5.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.5.1-2, A.7.6.1.5.1-3 and A.7.6.1.5.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.1.5.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Value	Comment
<i>highSpeedMeasFlagFR2-r17</i>		1, 2	Set2	<i>highSpeedMeasFlagFR2-r17</i> = set2 is configured
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTTC configuration		1, 2	SMTTC.1	
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μ s	Synchronous cells
T1	s	1, 2	1	
T2	s	1, 2	2	

Table A.7.6.1.5.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1	24		24	
		2	48		48	
Intial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2	CCR.3.7 TDD		N/A	
TRS configuration		1, 2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120		120	
OCNG Patterns		1, 2	OP.5		N/A	
cellIndividualOffset	dB	1~2	N/A		16	
SSB		1	SSB.1 FR2		SSB.7 FR2	
		2	SSB.2 FR2		SSB.8 FR2	
Propagation Condition		1, 2	No external noise (Note 2)		No external noise (Note 2) 19444Hz ^{Note 1}	

Note 1:	The AWGN 19444 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 19444 Hz.
Note 2:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].

Table A.7.6.1.5.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam assumption ^{Note 4}		1,2	Rough		Rough	
E _s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
I _o	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1, 2	Defined in Figure A.7.6.1.1.1-1			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Void						
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 5: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.						

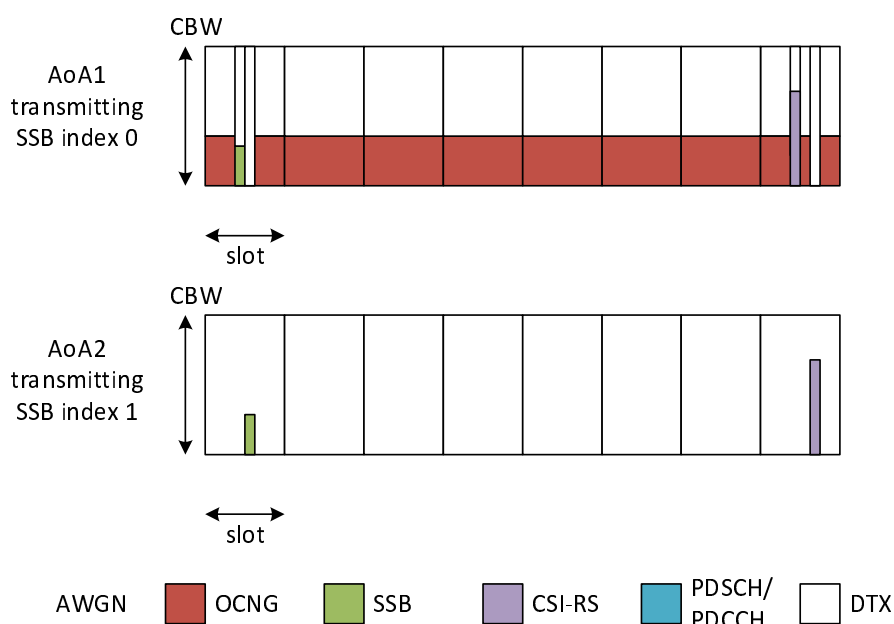


Figure A.7.6.1.5.1-1: Time multiplexed downlink transmissions (Config 1 example)**A.7.6.1.5.2 Test Requirements**

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1140 ms from the beginning of time period T2.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.6 SA event triggered reporting test without gap under non-DRX for FR2-2**A.7.6.1.6.1 Test purpose and Environment**

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.6.1-1.

Table A.7.6.1.6.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2-2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.6.1-2, A.7.6.1.6.1-3 and A.7.6.1.6.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.1.6.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 without gap without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1,2,3	PCell (Cell 1)	
Neighbour cell		1,2,3	Cell 2	Cell to be identified.
RF Channel Number		1,2,3	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		1,2,3	SMTC.1	
A3-Offset	dB	1,2,3	-11	
CP length		1,2,3	Normal	
Hysteresis	dB	1,2,3	0	

Time To Trigger	s	1,2,3	0	
Filter coefficient		1,2,3	0	L3 filtering is not used
DRX		1,2,3	OFF	
Time offset between Cell 1 and Cell 2		1,2,3	3 μ s	Synchronous cells
T1	s	1,2,3	5	
T2	s	1,2,3	5	

Table A.7.6.1.6.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,2,3	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
		2	400: N _{RB,c} = 66		400: N _{RB,c} = 66	
		3	400: N _{RB,c} = 33		400: N _{RB,c} = 33	
Data RBs allocated		1	66		66	
		2	66		66	
		3	33		33	
Intial BWP configuration		1,2,3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2,3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1,2,3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1,2,3	SSB		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2,3	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2,3	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2,3	CCR.3.7 TDD		N/A	
TRS configuration		1,2,3	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1,2,3	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1,2,3	120		120	
OCNG Patterns		1,2,3	OP.5		N/A	
cellIndividualOffset	dB	1,2,3	N/A		16	
SSB		1	SSB.1 FR2		SSB.7 FR2	
		2	SSB.9 FR2		SSB.15 FR2	
		3	SSB.10 FR2		SSB.16 FR2	
Propagation Condition		1, 2,3	No external noise (Note 1)		No external noise (Note 1)	
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].						

Table A.7.6.1.6.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 without gap without DRX

Parameter	Unit	Config	Cell 1	Cell 2
-----------	------	--------	--------	--------

			T1	T2	T1	T2
AoA setup		1,2,3	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam assumption ^{Note 4}		1,2,3	Rough		Rough	
E _s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-83	-83	-Infinity	-83
		3	-80	-80	-Infinity	-80
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2,3	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-83	-83	-Infinity	-83
		3	-80	-80	-Infinity	-80
Io	dBm/95.04MHz	1,2,3	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1, 2,3	Defined in Figure A.7.6.1.1.1-1			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Void						
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 5: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.						

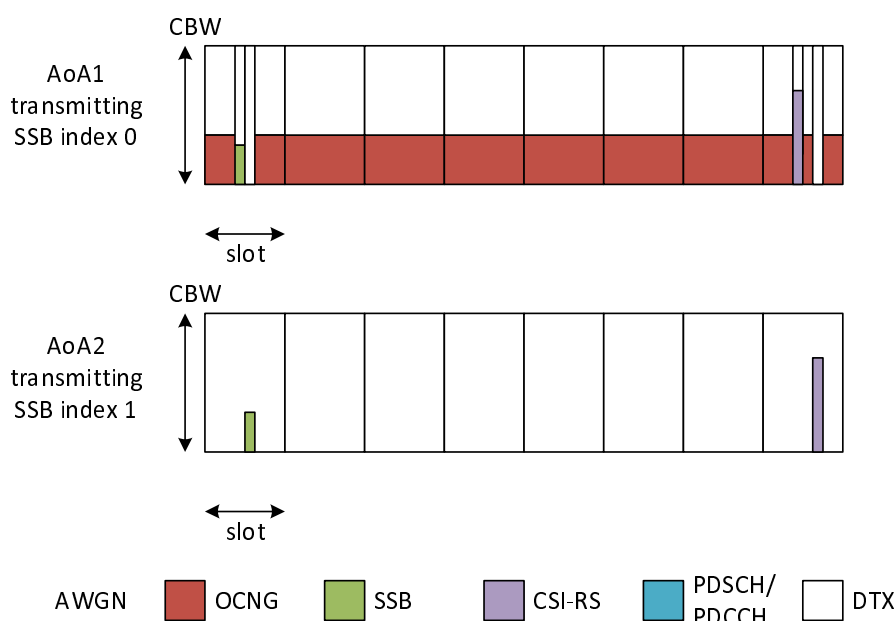


Figure A.7.6.1.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.7.6.1.6.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

- 2.4s ($60 \times 20\text{ms} + 60 \times 20\text{ms}$) for a UE supporting power class 1,
- 1.44s ($36 \times 20\text{ms} + 36 \times 20\text{ms}$) for a UE supporting power class 2 and 3

For Configuration 2,

- 3.6s ($120 \times 20\text{ms} + 60 \times 20\text{ms}$) for a UE supporting power class 1,
- 2.16s ($72 \times 20\text{ms} + 36 \times 20\text{ms}$) for a UE supporting power class 2 and 3

For Configuration 3,

- 4.8s ($180 \times 20\text{ms} + 60 \times 20\text{ms}$) for a UE supporting power class 1,
- 2.88s ($108 \times 20\text{ms} + 36 \times 20\text{ms}$) for a UE supporting power class 2 and 3

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.7 SA event triggered reporting test without gap under DRX for FR2-2

A.7.6.1.7.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.7.1-1.

Table A.7.6.1.7.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2-2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.7.1-2 ~ 6.

In the measurement control information, a measurement object is configured for the frequency of the Pcell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.1.7.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD Pcell in FR2-2 without gap with DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1, 2,3	PCell (Cell 1)		
Neighbour cell		1, 2,3	Cell 2		Cell to be identified.
RF Channel Number		1, 2,3	1: Cell 1 and Cell 2		One TDD carrier frequency is used for the NR cells.
SMTC configuration		1, 2,3	SMTC.1		
A3-Offset	dB	1, 2,3	-6		
CP length		1, 2,3	Normal		
Hysteresis	dB	1, 2,3	0		
Time To Trigger	s	1, 2,3	0		
Filter coefficient		1, 2,3	0		L3 filtering is not used
DRX		1, 2,3	DRX.1	DRX.7	DRX related parameters are defined in Table A.7.6.1.2.1-5
Time offset between Cell 1 and Cell 2		1, 2,3	3 μ s		Synchronous cells
T1	s	1, 2,3	5		
T2	s	1, 2,3	10	52	

Table A.7.6.1.7.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 without gap with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2,3	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
		2	400: N _{RB,c} = 66		400: N _{RB,c} = 66	
		3	400: N _{RB,c} = 33		400: N _{RB,c} = 33	
Data RBs allocated		1	66		66	
		2	66		66	
		3	33		33	
Intial BWP configuration		1, 2,3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2,3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2,3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2,3	SSB		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2,3	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2,3	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2,3	CCR.3.7 TDD		N/A	
TRS configuration		1, 2,3	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2,3	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2,3	120		120	
OCNG Patterns		1, 2,3	OP.1		OP.1	
SSB		1	SSB.1 FR2		SSB.7 FR2	
		2	SSB.9 FR2		SSB.15 FR2	
		3	SSB.10 FR2		SSB.16 FR2	
Propagation Condition		1, 2,3	AWGN		AWGN	

Table A.7.6.1.7.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD Pcell in FR2-2 without gap with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2,3	Setup 1 defined in A.3.15.1			
Beam assumption ^{Note 4}		1,2,3	Rough		Rough	
$\hat{E}_s / I_{ot}$ ^{BB Note 5}	dB	1, 2,3	3.77	-1.52	-Infinity	-1.52
N_{oc} ^{Note 2}	dBm/15 KHz	1, 2,3	-98			
N_{oc} ^{Note 2}	dBm/SCS	1	-89			
		2	-83			
		3	-80			
SSB_RP	dBm/SCS	1	-85	-85	-Infinity	-85
		2	-79	-79	-Infinity	-79

		3	-76	-76	-Infinity	-76
$\hat{E}_s / N_{oc}$	dB	1, 2,3	4	4	-Infinity	4
I_o	dBm/95.04MHz	1, 2,3	-54.53	-52.18	See Cell 1 columns	
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.					
Note 5:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.					

A.7.6.1.7.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

- 7.2s ($60 \cdot 40\text{ms} \cdot 1.5 + 60 \cdot 40\text{ms} \cdot 1.5$) for a UE supporting power class 1,
- 4.32s ($36 \cdot 40\text{ms} \cdot 1.5 + 36 \cdot 40\text{ms} \cdot 1.5$) for a UE supporting power class 2 and 3

For Configuration 2,

- 10.8s ($120 \cdot 40\text{ms} \cdot 1.5 + 60 \cdot 40\text{ms} \cdot 1.5$) for a UE supporting power class 1,
- 6.48s ($72 \cdot 40\text{ms} \cdot 1.5 + 36 \cdot 40\text{ms} \cdot 1.5$) for a UE supporting power class 2 and 3

For Configuration 3,

- 14.4s ($180 \cdot 40\text{ms} \cdot 1.5 + 60 \cdot 40\text{ms} \cdot 1.5$) for a UE supporting power class 1,
- 8.64s ($108 \cdot 40\text{ms} \cdot 1.5 + 36 \cdot 40\text{ms} \cdot 1.5$) for a UE supporting power class 2 and 3

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

- 76.8s ($60 \cdot 640\text{ms} + 60 \cdot 640\text{ms}$) for a UE supporting power class 1,
- 46.08s ($36 \cdot 640\text{ms} + 36 \cdot 640\text{ms}$) for a UE supporting power class 2 and 3

For Configuration 2,

- 115.2s ($120 \cdot 640\text{ms} + 60 \cdot 640\text{ms}$) for a UE supporting power class 1,
- 69.12s ($72 \cdot 640\text{ms} + 36 \cdot 640\text{ms}$) for a UE supporting power class 2 and 3

For Configuration 3,

- 153.6s (180*640ms + 60*640ms) for a UE supporting power class 1,
- 92.16s (108*640ms + 36*640ms) for a UE supporting power class 2 and 3

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.8 SA event triggered reporting test with per-UE gaps under non-DRX for FR2-2

A.7.6.1.8.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.8.1-1.

Table A.7.6.1.8.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2-2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.8.1-2 ~ 4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.1.8.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD Pcell in FR2-2 with per-UE gaps without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1,2,3	PCell (Cell 1)	
Neighbour cell		1,2,3	Cell 2	Cell to be identified.
RF Channel Number		1,2,3	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Gap type		1,2,3	Per-UE gaps	
Measurement gap repetition periodicity	ms	1,2,3	40	
Measurement gap length	ms	1,2,3	6	
Measurement gap offset	ms	1,2,3	39	
SMTC configuration		1,2,3	SMTC.1	
CSI-RS parameters		1,2,3	CSI-RS.3.2 TDD	
A3-Offset	dB	1,2,3	-11	

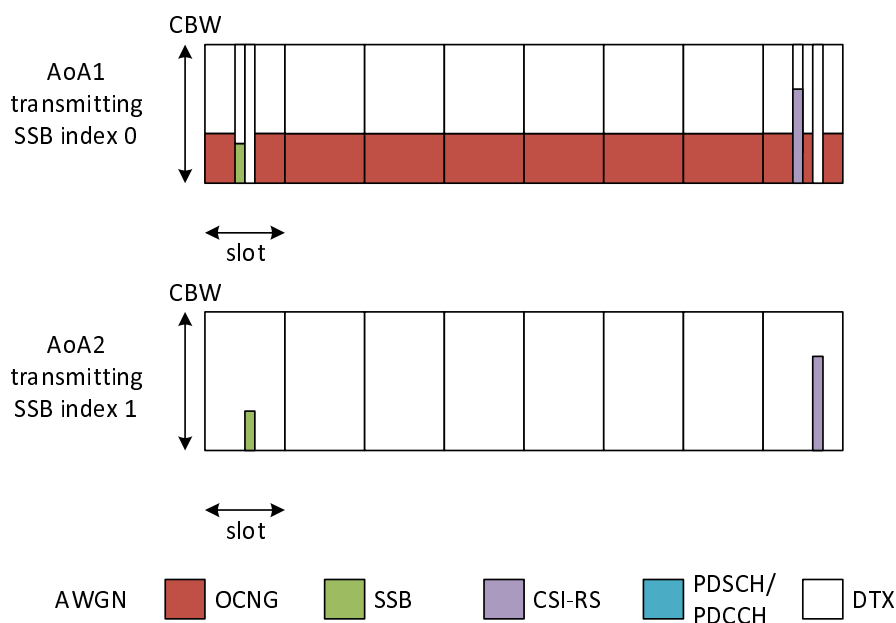
CP length		1,2,3	Normal	
Hysteresis	dB	1,2,3	0	
Time To Trigger	s	1,2,3	0	
Filter coefficient		1,2,3	0	L3 filtering is not used
DRX		1,2,3	OFF	
Time offset between Cell 1 and Cell 2		1,2,3	3 μ s	Synchronous cells
T1	s	1, 2,3	5	
T2	s	1, 2,3	5	

Table A.7.6.1.8.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2,3	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
		2	400: N _{RB,c} = 66		400: N _{RB,c} = 66	
		3	400: N _{RB,c} = 33		400: N _{RB,c} = 33	
Data RBs allocated		1	66		66	
		2	66		66	
		3	33		33	
Intial BWP configuration		1,2,3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2,3	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1,2,3	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1,2,3	CSI-RS		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2,3	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2,3	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2,3	CCR.3.7 TDD		N/A	
TRS configuration		1,2,3	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1,2,3	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1,2,3	120		120	
OCNG Patterns		1,2,3	OP.5		N/A	
cellIndividualOffset	dB	1,2,3	N/A		16	
SSB		1	SSB.1 FR2		SSB.7 FR2	
		2	SSB.9 FR2		SSB.15 FR2	
		3	SSB.10 FR2		SSB.16 FR2	
Propagation Condition		1, 2,3	No external noise (Note 1)		No external noise (Note 1)	
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].						

Table A.7.6.1.8.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2,3	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam Assumption ^{Note 4}		1,2,3	Rough		Rough	
E _s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-83	-83	-Infinity	-83
		3	-80	-80	-Infinity	-80
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1,2,3	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-83	-83	-Infinity	-83
		3	-80	-80	-Infinity	-80
I _o	dBm/95.04MHz	1,2,3	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1,2,3	Defined in Figure A.7.6.1.3.1-1			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Void						
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 5: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.						

**Figure A.7.6.1.8.1-1: Time multiplexed downlink transmissions (Config 1 example)**

A.7.6.1.8.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

- 4.8s (60*40ms+60*40ms) for a UE supporting power class 1,
- 2.88s (36*40ms+36*40ms) for a UE supporting power class 2 and 3

For Configuration 2,

- 7.2s (120*40ms+60*40ms) for a UE supporting power class 1,
- 4.32s (72*40ms+36*40ms) for a UE supporting power class 2 and 3

For Configuration 3,

- 9.6s (180*40ms+60*40ms) for a UE supporting power class 1,
- 5.76s (108*40ms+36*40ms) for a UE supporting power class 2 and 3

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.9 SA event triggered reporting test with per-UE gaps under DRX for FR2-2

A.7.6.1.9.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.9.1-1.

Table A.7.6.1.9.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2-2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.9.1-2, A.7.6.1.9.1-3 and A.7.6.1.9.1-4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.1.9.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 with per-UE gaps with DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1,2,3	PCell (Cell 1)		
Neighbour cell		1,2,3	Cell 2		Cell to be identified.
RF Channel Number		1,2,3	1: Cell 1 and Cell 2		One TDD carrier frequency is used for the NR cells.
Gap type		1,2,3	Per-UE gaps		
Measurement gap repetition periodicity	ms	1,2,3	40		
Measurement gap length	ms	1,2,3	6		
Measurement gap offset	ms	1,2,3	39		
SMTC configuration		1,2,3	SMTC.1		
CSI-RS parameters		1,2,3	CSI-RS.3.2 TDD		
A3-Offset	dB	1,2,3	-6		
CP length		1,2,3	Normal		
Hysteresis	dB	1,2,3	0		
Time To Trigger	s	1,2,3	0		
Filter coefficient		1,2,3	0		L3 filtering is not used
DRX		1,2,3	DRX.1	DRX.7	DRX related parameters are defined in Table A.7.6X.1.2.17.6.1.7.1-5
Time offset between Cell 1 and Cell 2		1,2,3	3 μ s		Synchronous cells
T1	s	1,2,3	5		
T2	s	1,2,3	10	52	

Table A.7.6.1.9.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,2,3	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
		2	400: N _{RB,c} = 66		400: N _{RB,c} = 66	
		3	400: N _{RB,c} = 33		400: N _{RB,c} = 33	
Data RBs allocated		1	66		66	
		2	66		66	
		3	33		33	
Initial BWP configuration		1,2,3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2,3	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1,2,3	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1,2,3	CSI-RS		SSB	

PDSCH RMC configuration		1	SR.3.2 TDD	N/A
		2,3	SR.3.3 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
		2,3	CR.3.2 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
		2,3	CCR.3.7 TDD	N/A
TRS configuration		1, 2,3	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI state		1, 2,3	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1, 2,3	120	120
OCNG Patterns		1, 2,3	OP.1	OP.1
SSB		1	SSB.11 FR2	SSB.11 FR2
		2,3	SSB.12 FR2	SSB.12 FR2
Propagation Condition		1, 2,3	AWGN	AWGN

Table A.7.6.1.9.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2,3	Setup 1 defined in A.3.15.1			
Beam Assumption ^{Note 4}		1,2,3	Rough			
$\hat{E}_s/I_{ot}$ ^{BB Note 5}	dB	1, 2,3	3.77	-1.52	-Infinity	-1.52
N_{oc} ^{Note 2}	dBm/15 KHz	1, 2,3	-98			
N_{oc} ^{Note 2}	dBm/SCS	1	-89			
		2	-83			
		3	-80			
SSB_RP	dBm/SCS	1	-85	-85	-Infinity	-85
		2	-79	-79	-Infinity	-79
		3	-76	-76	-Infinity	-76
$\hat{E}_s/N_{oc}$	dB	1, 2,3	4	4	-Infinity	4
I_o	dBm/95.04MHz	1,2,3	-54.53	-52.18	See Cell 1 columns	
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 5: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.						

A.7.6.1.9.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

- 7.2s ($60 \cdot 40\text{ms} \cdot 1.5 + 60 \cdot 40\text{ms} \cdot 1.5$) for a UE supporting power class 1,
- 4.32s ($36 \cdot 40\text{ms} \cdot 1.5 + 36 \cdot 40\text{ms} \cdot 1.5$) for a UE supporting power class 2 and 3

For Configuration 2,

- 10.8s ($120 \cdot 40\text{ms} \cdot 1.5 + 60 \cdot 40\text{ms} \cdot 1.5$) for a UE supporting power class 1,
- 6.48s ($72 \cdot 40\text{ms} \cdot 1.5 + 36 \cdot 40\text{ms} \cdot 1.5$) for a UE supporting power class 2 and 3

For Configuration 3,

- 14.4s ($180 \cdot 40\text{ms} \cdot 1.5 + 60 \cdot 40\text{ms} \cdot 1.5$) for a UE supporting power class 1,
- 8.64s ($108 \cdot 40\text{ms} \cdot 1.5 + 36 \cdot 40\text{ms} \cdot 1.5$) for a UE supporting power class 2 and 3

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

- 76.8s ($60 \cdot 640\text{ms} + 60 \cdot 640\text{ms}$) for a UE supporting power class 1,
- 46.08s ($36 \cdot 640\text{ms} + 36 \cdot 640\text{ms}$) for a UE supporting power class 2 and 3

For Configuration 2,

- 115.2s ($120 \cdot 640\text{ms} + 60 \cdot 640\text{ms}$) for a UE supporting power class 1,
- 69.12s ($72 \cdot 640\text{ms} + 36 \cdot 640\text{ms}$) for a UE supporting power class 2 and 3

For Configuration 3,

- 153.6s ($180 \cdot 640\text{ms} + 60 \cdot 640\text{ms}$) for a UE supporting power class 1,
- 92.16s ($108 \cdot 640\text{ms} + 36 \cdot 640\text{ms}$) for a UE supporting power class 2 and 3

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \cdot \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.10 SA event triggered reporting test with SSB time index detection without gap under non-DRX for FR2-2

A.7.6.1.10.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.10.1-1.

Table A.7.6.1.10.1-1: supported test configurations

Configuration	Description
1	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode

There are two cells in the test, Pcell (Cell 1) and a FR2-2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.10.1-2, A.7.6.1.10.1-3 and A.7.6.1.10.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.1.10.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD Pcell in FR2-2 without gap without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1	PCell (Cell 1)	
Neighbour cell		1	Cell 2	Cell to be identified.
RF Channel Number		1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		1	SMTC.1	
A3-Offset	dB	1	-11	
CP length		1	Normal	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX		1	OFF	
Time offset between Cell 1 and Cell 2		1	3 μ s	Synchronous cells
T1	s	1	5	
T2	s	1	5	

Table A.7.6.1.10.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD Pcell in FR2-2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1	24		24	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1	SSB		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	

Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
TRS configuration		1	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1	120	120
OCNG Patterns		1	OP.5	N/A
cellIndividualOffset	dB	1	N/A	16
SSB		1	SSB.10 FR2	SSB.16 FR2
Propagation Condition		1	No external noise (Note 1)	No external noise (Note 1)
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

Table A.7.6.1.10.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam assumption ^{Note 4}		1	Rough		Rough	
E _s	dBm/SCS	1	-80	-80	-Infinity	-80
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-80	-80	-Infinity	-80
I _o	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
Time multiplexing of the downlink transmissions from each AoA		1	Defined in Figure A.7.6X.1.1.1-1			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Void					
Note 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					
Note 5:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.					

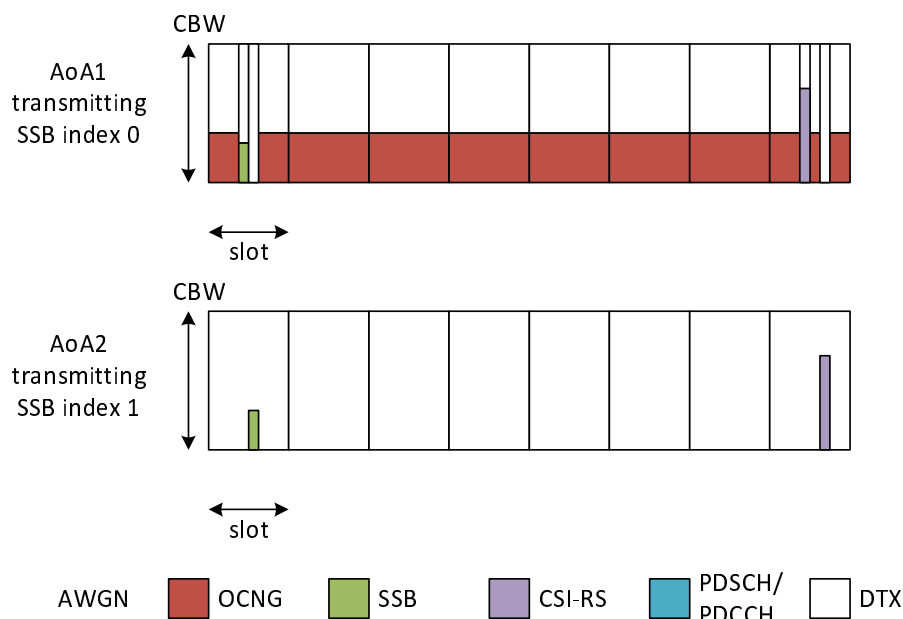


Figure A.7.6.1.10.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.7.6.1.10.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 6.24s ($180 \times 20\text{ms} + 60 \times 20\text{ms} + 72 \times 20\text{ms}$) for a UE supporting power class 1,
- 3.84s ($108 \times 20\text{ms} + 36 \times 20\text{ms} + 48 \times 20\text{ms}$) for a UE supporting power class 2 and 3

The UE is required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.1.11 SA event triggered reporting test with SSB time index detection with per-UE gaps under non-DRX for FR2-2

A.7.6.1.11.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.1.11.1-1.

Table A.7.6.1.11.1-1: supported test configurations

Configuration	Description
1	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode

There are two cells in the test, PCell (Cell 1) and a FR2-2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.11.1-2 ~ 4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.1.11.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 with per-UE gaps without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1	PCell (Cell 1)	
Neighbour cell		1	Cell 2	Cell to be identified.
RF Channel Number		1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Gap type		1	Per-UE gaps	
Measurement gap repetition periodicity	ms	1	40	
Measurement gap length	ms	1	6	
Measurement gap offset	ms	1	39	
SMTC configuration		1	SMTC.1	
CSI-RS parameters		1	CSI-RS.3.2 TDD	
A3-Offset	dB	1	-11	
CP length		1	Normal	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX		1	OFF	
Time offset between Cell 1 and Cell 2		1	3 μ s	Synchronous cells
T1	s	1	5	
T2	s	1	5	

Table A.7.6.1.11.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1	100: N _{RB,C} = 66		100: N _{RB,C} = 66	
Data RBs allocated		1	24		24	
		2	48		48	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1	CSI-RS		SSB	

PDSCH RMC configuration		1	SR.3.2 TDD	N/A
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
TRS configuration		1	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1	120	120
OCNG Patterns		1	OP.5	N/A
cellIndividualOffset	dB	1	N/A	16
SSB		1	SSB.12 FR2	SSB.16 FR2
Propagation Condition		1	No external noise (Note 1)	No external noise (Note 1)
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

Table A.7.6.1.11.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam Assumption ^{Note 4}		1	Rough		Rough	
E _s	dBm/SCS	1	-80	-80	-Infinity	-80
$\hat{E}_s / I_{ot}$ BB Note 5	dB	1	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-80	-80	-Infinity	-80
I _o	dBm/95.04MHz	1	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1	Defined in Figure A.7.6X.1.3.1-1			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Void						
Note 3: Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 5: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.						

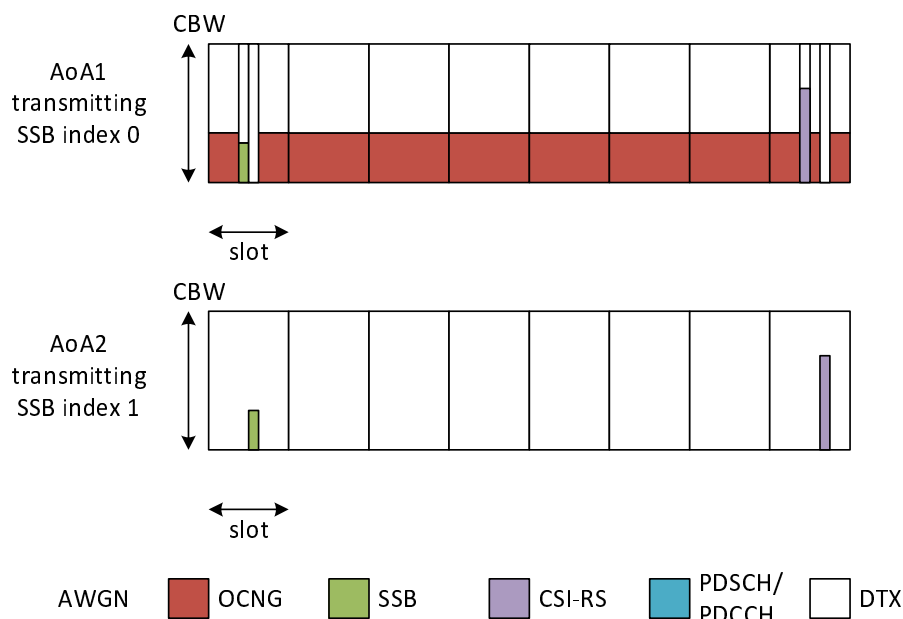


Figure A.7.6.1.11.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.7.6.1.11.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 12.48s ($180 \times 40\text{ms} + 60 \times 40\text{ms}$) for a UE supporting power class 1,
- 7.68s ($108 \times 40\text{ms} + 36 \times 40\text{ms}$) for a UE supporting power class 2 and 3

The UE is required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2 Inter-frequency Measurements

A.7.6.2.1 SA event triggered reporting tests for FR2 without SSB time index detection when DRX is not used (PCell in FR2)

A.7.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.1.1-1, A.7.6.2.1.1-2, and A.7.6.2.1.1-3.

Measurement gap pattern configuration defined in Table A.7.6.2.1.1-2 is provided for a UE that does not support per-FR gap, and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.1.1-1.

Table A.7.6.2.1.1-1 SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.7.6.2.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3µs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	5.2 for PC1; 3.5 for other PC	

Table A.7.6.2.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1	Cell 2
-----------	------	--------------------	--------	--------

				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption ^{Note 7}			1,2	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
Ē _s		dBm/S CS	Config 1	-87	-87	-Infinity	-87
SSBRP ^{Note 3}		dBm/S CS ^{Note5}	Config 1	-87	-87	-Infinity	-87
Ē _s /I _{ot BB} ^{Note 8}		dB	Config 1	1.89	1.89	-Infinity	1.89
I _o ^{Note3}		dBm/95.04 MHz ^{Note5}	Config 1	-58.01	-58.01	-Infinity	-58.01

Propagation Condition		Config 1	No external noise (Note 9)	No external noise (Note 9)
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Void			
Note 3:	SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4:	Void			
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone			
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone			
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			
Note 8:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMBs from TS 38.101-2 [19] Table 6.2.1.3-4.			
Note 9:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].			

A.7.6.2.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.2 SA event triggered reporting tests for FR2 without SSB time index detection when DRX is used (Pcell in FR2)

A.7.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as Pcell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.2.1-1, A.7.6.2.2.1-2, and A.7.6.2.2.1-3.

Measurement gap pattern configuration defined in Table A.7.6.2.2.1-2 is provided for a UE that does not support per-FR gap, and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.2.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.2.1-1: SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.7.6.2.2.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6		
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	DRX.1	DRX.7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3μs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table A.7.6.2.2.1-3: Cell specific test parameters for CA inter-frequency event triggered reporting without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	

	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0	0		
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}		dBm/15 kHz Note5		-104.7		-104.7	
N_{oc}^{Note2}		dBm/S CS Note4	Config 1	-95.7		-95.7	
SS-RSRP ^{Note 3}		dBm/S CS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s/I_{ot}$		dB	Config 1	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$		dB	Config 1	6	6	-Infinity	9
I_o^{Note3}		dBm/95 .04 MHz Note5	Config 1	-59.7	-59.7	-66.7	-57.2
Propagation Condition			Config 1	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.2.2.2 Test Requirements

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.3 SA event triggered reporting tests for FR2 with SSB time index detection when DRX is not used (PCell in FR2)

A.7.6.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.3.1-1, A.7.6.2.3.1-2, and A.7.6.2.3.1-3.

Measurement gap pattern configuration defined in Table A.7.6.2.3.1-2 is provided for a UE that does not support per-FR gap, and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.3.1-1.

Table A.7.6.2.3.1-1: SA event triggered reporting tests with SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.7.6.2.3.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3µs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	7 for PC1; 4.5 for other PC	

Table A.7.6.2.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1	AoA1		AoA2	
NR RF Channel Number			Config 1	Rough		Rough	
Duplex mode			Config 1	1		2	
TDD configuration			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	

	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0	0		
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
$\hat{E}_s$		dBm/S CS	Config 1	-87	-87	-Infinity	-87
SSBRP ^{Note 3}		dBm/S CS ^{Note5}	Config 1	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot_BB}$ ^{Note 8}		dB	Config 1	1.89	1.89	-Infinity	1.89
I_o ^{Note3}		dBm/95 .04 MHz ^{Note5}	Config 1	-58.01	-58.01	-Infinity	-58.01
Propagation Condition			Config 1	No external noise (Note 9)		No external noise (Note 9)	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Void							
Note 3: SBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: Void							
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone							
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone							
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation							
Note 8: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _s from TS 38.101-2 [19] Table 6.2.1.3-4.							
Note 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].							

A.7.6.2.3.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

The UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.7.6.2.4 SA event triggered reporting tests for FR2 with SSB time index detection when DRX is used (Pcell in FR2)

A.7.6.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as Pcell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.4.1-1, A.7.6.2.4.1-2, and A.7.6.2.4.1-3.

Measurement gap pattern configuration defined in Table A.7.6.2.4.1-2 is provided for a UE that does not support per-FR gap, and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.4.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.4.1-1: SA event triggered reporting tests with SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.7.6.2.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.

Neighbour cell		Config 1	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6		
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	DRX.1	DRX.7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3µs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	

Table A.7.6.2.4.1-3: Cell specific test parameters for CA inter-frequency event triggered reporting with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS							
EPRE ratio of PBCH DMRS to SSS							

EPRE ratio of PBCH to PBCH DMRS		Config 1	0	0		
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15 kHz Note5		-104.7	-104.7		
N_{oc}^{Note2}	dBm/S CS Note4	Config 1	-95.7	-95.7		
SS-RSRP ^{Note 3}	dBm/S CS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s / I_{ot}$	dB	Config 1	6	6	-Infinity	9
$\hat{E}_s / N_{oc}$	dB	Config 1	6	6	-Infinity	9
I_o^{Note3}	dBm/95 .04 MHz Note5	Config 1	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Void						
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.6.2.4.2 Test Requirements

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

107520 for UE supporting power class 1, or

66560 for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.5 SA event triggered reporting tests for FR2 without SSB time index detection when DRX is not used (PCell in FR1)

A.7.6.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.5.1-1, A.7.6.2.5.1-2, and A.7.6.2.5.1-3.

In test 1 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.5.1-2 is provided for a UE that does not support per-FR gap and in test 2 no gap pattern is configured as defined in Table A.7.6.2.5.1-2. If the UE supports per-FR gap, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.5.1-1.

Table A.7.6.2.5.1-1 SA event triggered reporting tests without SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.7.6.2.5.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0	Gap not configured	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39	N/A	
SMTC-SSB parameters on NR RF Channel 1		Config 1	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2	SSB.1 FR1		As specified in clause A.3.10.1

		Config 3	SSB.2 FR1	As specified in clause A.3.10.1	
CSI-RS for tracking parameters on NR RF Channel 1		Config 1	TRS.1.1 FDD		
		Config 2	TRS.1.1 TDD		
		Config 3	TRS.1.2 TDD		
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2	As specified in clause A.3.10.2	
<i>offsetMO</i>	dB	Config 1,2,3	6		
Hysteresis	dB	Config 1,2,3	0		
<i>a4-Threshold</i>	dBm	Config 1,2,3	-105		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0	L3 filtering is not used	
DRX		Config 1,2,3	OFF	DRX is not used	
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.	
		Config 2,3	3µs	Synchronous cells.	
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	5.2 for PC1; 3.5 for other PC	3 for PC1; 2 for other PC	

Table A.7.6.2.5.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1,2,3	N/A		Setup 1 as specified in clause A.3.15	
Beam Assumption ^{Note 7}			Config 1,2,3	N/A		Rough	
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD		TDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.3.1	
			Config 2	TDDConf.1.1		TDDConf.3.1	
			Config 3	TDDConf.2.1		TDDConf.3.1	
BW _{channel}		MHz	Config 1	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
			Config 2	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
			Config 3	40: N _{RB,c} = 106		100: N _{RB,c} = 66	
Data RBs allocated			Config 1	52		66	
			Config 2	52		66	
			Config 3	106		66	
BWP BW		MHz	Config 1	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
			Config 2	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
			Config 3	40: N _{RB,c} = 106		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	

PDSCH Reference measurement channel		Config 1	SR.1.1 FDD	-	
		Config 2	SR.1.1 TDD		
		Config 3	SR.2.1 TDD		
RMSI CORESET Reference Channel		Config 1	CR.1.1 FDD	-	
		Config 2	CR.1.1 TDD		
		Config 3	CR.2.1 TDD		
Dedicated CORESET RMC configuration		Config 1	CCR.1.1 FDD	-	
		Config 2	CCR.1.1 TDD		
		Config 3	CCR.2.1 TDD		
SMTC configuration defined in A.3.11.1 and A.3.11.2		Config 1	SMTC.2	SMTC.2	
		Config 2,3	SMTC.1	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15	120	
		Config 3	30	120	
EPRE ratio of PSS to SSS		Config 1,2,3	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
$\hat{E}_s$	dBm/S CS	Config 1,2,3	NA Link only, see clause A.3.7A	-Infinity	-87
SSB_RP ^{Note 3}	dBm/S CS	Config 1,2		-Infinity	-87
	Note5	Config 3		-Infinity	-87
$\hat{E}_s / I_{ot\ BB}$ ^{Note 8}	dB	Config 1,2,3		-Infinity	14.69
	dBm/95 .04 MHz	Config 1,2,3		-Infinity	-58.01
	Note5				
Propagation Condition		Config 1,2,3		No external noise (Note 9)	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Void					
Note 3: SS B_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: Void					
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone					
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					
Note 8: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _s from TS 38.101-2 [19] Table 6.2.1.3-4.					
Note 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].					

A.7.6.2.5.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

In test 2, without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

2560 for UE supporting power class 1, or

1600 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.6 SA event triggered reporting tests for FR2 without SSB time index detection when DRX is used (Pcell in FR1)

A.7.6.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as Pcell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.6.1-1, A.7.6.2.6.1-2, and A.7.6.2.6.1-3.

In test 1&2 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.6.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 no gap pattern is configured as defined in Table A.7.6.2.6.1-2. If a UE supports per-FR gap it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.6.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.6.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.7.6.2.6.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1,2,3	1, 2				One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0		Gap not configured		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39		N/A		
SMTC-SSB parameters on NR RF Channel 1		Config 1	SSB.1 FR1				As specified in clause A.3.10.1
		Config 2	SSB.1 FR1				As specified in clause A.3.10.1
		Config 3	SSB.2 FR1				As specified in clause A.3.10.1
CSI-RS for tracking parameters on NR RF Channel 1		Config 1	TRS.1.1 FDD				
		Config 2	TRS.1.1 TDD				
		Config 3	TRS.1.2 TDD				
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2				As specified in clause A.3.10.2
offsetMO	dB	Config 1,2,3	6				
Hysteresis	dB	Config 1,2,3	0				
a4-Threshold	dBm	Config 1,2,3	-105				
CP length		Config 1,2,3	Normal				
TimeToTrigger	s	Config 1,2,3	0				
Filter coefficient		Config 1,2,3	0				L3 filtering is not used
DRX		Config 1,2,3	DRX .1	DRX .7	DRX .1	DRX .7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs				Synchronous cells.
T1	s	Config 1,2,3	5				
T2	s	Config 1,2,3	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table A.7.6.2.6.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1,2,3	NA		Setup 1 as specified in clause A.3.15	
NR RF Channel Number		Config 1,2,3	1		2	

Duplex mode			Config 1	FDD	TDD
			Config 2,3	TDD	TDD
TDD configuration			Config 1	Not Applicable	TDDConf.3.1
			Config 2	TDDConf.1.1	TDDConf.3.1
			Config 3	TDDConf.2.1	TDDConf.3.1
BW _{channel}		MHz	Config 1	10: N _{RB,c} = 52	100: N _{RB,c} = 66
			Config 2	10: N _{RB,c} = 52	100: N _{RB,c} = 66
			Config 3	40: N _{RB,c} = 106	100: N _{RB,c} = 66
Data RBs allocated			Config 1	52	66
			Config 2	52	66
			Config 3	106	66
BWP BW		MHz	Config 1	10: N _{RB,c} = 52	100: N _{RB,c} = 66
			Config 2	10: N _{RB,c} = 52	100: N _{RB,c} = 66
			Config 3	40: N _{RB,c} = 106	100: N _{RB,c} = 66
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1	N/A
	Initial UL BWP			ULBWP.0.1	N/A
	Dedicated DL BWP			DLBWP.1.1	N/A
	Dedicated UL BWP			ULBWP.1.1	N/A
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	-
			Config 2	SR.1.1 TDD	
			Config 3	SR.2.1 TDD	
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD	-
			Config 2	CR.1.1 TDD	
			Config 3	CR.2.1 TDD	
Dedicated CORESET RMC configuration			Config 1	CCR.1.1 FDD	-
			Config 2	CCR.1.1 TDD	
			Config 3	CCR.2.1 TDD	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.2	SMTC.2
			Config 2,3	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15	120
			Config 3	30	120
EPRE ratio of PSS to SSS			Config 1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					

N_{oc} ^{Note2}	dBm/15 kHz Note5		NA Link only, see clause A.3.7A	-104.7	
N_{oc} ^{Note2}	dBm/S CS Note4	Config 1,2		-95.7	
		Config 3		-95.7	
SSB_RP ^{Note 3}	dBm/S CS Note5	Config 1,2		-Infinity	-86.7
		Config 3		-Infinity	-86.7
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3		-Infinity	9
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3		-Infinity	9
I_o ^{Note3}	dBm/9.36MHz	Config 1,2		-	-
	dBm/38.16MHz	Config 3		-	-
	dBm/95.04 MHz Note5	Config 1,2,3		-66.7	-57.2
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone					

A.7.6.2.6.2 Test Requirements

In test 1 with per-UE gap and in test 3 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.7 SA event triggered reporting tests for FR2 with SSB time index detection when DRX is not used (PCell in FR1)

A.7.6.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.7.1-1, A.7.6.2.7.1-2, and A.7.6.2.7.1-3.

In test 1 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.7.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement no gap pattern is configured as defined in Table A.7.6.2.7.1-2. If the UE supports per-FR gap, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.7.1-1.

Table A.7.6.2.7.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.7.6.2.7.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0	Gap not configured	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39	N/A	
SMTC-SSB parameters on NR RF Channel 1		Config 1	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3	SSB.2 FR1		As specified in clause A.3.10.1
CSI-RS for tracking parameters on NR RF Channel 1		Config 1	TRS.1.1 FDD		
		Config 2	TRS.1.1 TDD		
		Config 3	TRS.1.2 TDD		
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2		As specified in clause A.3.10.2
offset _{MO}	dB	Config 1,2,3	6		
Hysteresis	dB	Config 1,2,3	0		

<i>a4-Threshold</i>	dBm	Config 1,2,3,4,5,6	-105		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	OFF		DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	7 for PC1; 4.5 for other PC	3.5 for PC1; 2.5 for other PC	

Table A.7.6.2.7.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter		Unit	Test configuration n	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1,2,3	NA		Setup 1 as specified in clause A.3.15	
Beam Assumption ^{Note 7}			Config 1,2,3	N/A		Rough	
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	FDD		TDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.3.1	
			Config 2	TDDConf.1.1		TDDConf.3.1	
			Config 3	TDDConf.2.1		TDDConf.3.1	
BW _{channel}		MHz	Config 1	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
			Config 2	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
			Config 3	40: N _{RB,c} = 106		100: N _{RB,c} = 66	
Data RBs allocated			Config 1	52		66	
			Config 2	52		66	
			Config 3	106		66	
BWP BW		MHz	Config 1	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
			Config 2	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
			Config 3	40: N _{RB,c} = 106		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD		-	
			Config 2	SR.1.1 TDD			
			Config 3	SR.2.1 TDD			
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD		-	
			Config 2	CR.1.1 TDD			
			Config 3	CR.2.1 TDD			
			Config 1	CCR.1.1 FDD		-	

Dedicated CORESET RMC configuration		Config 2	CCR.1.1 TDD		
		Config 3	CCR.2.1 TDD		
SMTC configuration defined in A.3.11.1 and A.3.11.2		Config 1	SMTC.2	SMTC.2	
		Config 2,3	SMTC.1	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15	120	
		Config 3	30	120	
EPRE ratio of PSS to SSS		Config 1,2,3	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
$\hat{E}_s$	dBm/S CS	Config 1,2, 3	NA Link only, see clause A.3.7A	-Infinity	-87
SSB_RP ^{Note 3}	dBm/S CS Note5	Config 1,2		-Infinity	-87
		Config 3		-Infinity	-87
$\hat{E}_s / I_{ot_BB}$ ^{Note 8}	dB	Config 1,2,3		-Infinity	14.69
	dBm/95 .04 MHz Note5	Config 1,2,3		Infinity	-58.01
Propagation Condition		Config 1,2,3		No external noise (Note 9)	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Void					
Note 3: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: Void					
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone					
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					
Note 8: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _s from TS 38.101-2 [19] Table 6.2.1.3-4.					
Note 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].					

A.7.6.2.7.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

In test 2 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

3360 for UE supporting power class 1, or

2080 for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.7.6.2.8 SA event triggered reporting tests for FR2 with SSB time index detection when DRX is used (PCell in FR1)

A.7.6.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.8.1-1, A.7.6.2.8.1-2, and A.7.6.2.8.1-3.

In test 1&2 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.8.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement no gap pattern is configured as defined in Table A.7.6.2.8.1-2. If a UE supports per-FR gap, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.8.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.8.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.7.6.2.8.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	

NR RF Channel Number		Config 1,2,3	1, 2				One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	0	Gap not configured			As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39	N/A			
SMTC-SSB parameters on NR RF Channel 1		Config 1	SSB.1 FR1				As specified in clause A.3.10.1
		Config 2	SSB.1 FR1				As specified in clause A.3.10.1
		Config 3	SSB.2 FR1				As specified in clause A.3.10.1
CSI-RS for tracking parameters on NR RF Channel 1		Config 1	TRS.1.1 FDD				
		Config 2	TRS.1.1 TDD				
		Config 3	TRS.1.2 TDD				
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2				As specified in clause A.3.10.2
offsetMO	dB	Config 1,2,3	6				
Hysteresis	dB	Config 1,2,3	0				
a4-Threshold	dBm	Config 1,2,3	-105				
CP length		Config 1,2,3	Normal				
TimeToTrigger	s	Config 1,2,3	0				
Filter coefficient		Config 1,2,3	0				L3 filtering is not used
DRX		Config 1,2,3	DRX .1	DRX .7	DRX .1	DRX .7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs				Synchronous cells.
T1	s	Config 1,2,3	5				
T2	s	Config 1,2,3	11 for PC1; 6.5 for other PCT BD	108 for PC1; 67 for other PCT BD	11 for PC1; 6.5 for other PCT BD	108 for PC1; 67 for other PCT BD	

Table A.7.6.2.8.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1,2,3	NA		Setup 1 as specified in clause A.3.15	
Beam Assumption ^{Note 7}		Config 1,2,3	N/A		Rough	
NR RF Channel Number		Config 1,2,3	1		2	
Duplex mode		Config 1	FDD		TDD	
		Config 2,3	TDD		TDD	
TDD configuration		Config 1	Not Applicable		TDDConf.3.1	
		Config 2	TDDConf.1.1		TDDConf.3.1	
		Config 3	TDDConf.2.1		TDDConf.3.1	

BW _{channel}		MHz	Config 1	10: N _{RB,c} = 52	100: N _{RB,c} = 66
			Config 2	10: N _{RB,c} = 52	100: N _{RB,c} = 66
			Config 3	40: N _{RB,c} = 106	100: N _{RB,c} = 66
Data RBs allocated			Config 1	52	66
			Config 2	52	66
			Config 3	106	66
BWP BW		MHz	Config 1	10: N _{RB,c} = 52	100: N _{RB,c} = 66
			Config 2	10: N _{RB,c} = 52	100: N _{RB,c} = 66
			Config 3	40: N _{RB,c} = 106	100: N _{RB,c} = 66
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1	N/A
	Initial UL BWP			ULBWP.0.1	N/A
	Dedicated DL BWP			DLBWP.1.1	N/A
	Dedicated UL BWP			ULBWP.1.1	N/A
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	-
			Config 2	SR.1.1 TDD	
			Config 3	SR.2.1 TDD	
RMSI CORESET Reference Channel			Config 1	CR.1.1 FDD	-
			Config 2	CR.1.1 TDD	
			Config 3	CR.2.1 TDD	
Dedicated CORESET RMC configuration			Config 1	CCR.1.1 FDD	-
			Config 2	CCR.1.1 TDD	
			Config 3	CCR.2.1 TDD	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.2	SMTC.2
			Config 2,3	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15	120
			Config 3	30	120
EPRE ratio of PSS to SSS			Config 1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc}^{Note2}	dBm/15 kHz Note5				-104.7
N_{oc}^{Note2}	dBm/S CS Note4	Config 1,2			-95.7
		Config 3			-95.7

SSB_RP ^{Note 3}	dBm/S CS Note5	Config 1,2	NA Link only, see clause A.3.7A	-Infinity	-86.7
		Config 3		-Infinity	-86.7
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3		-Infinity	9
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3		-Infinity	9
I_o ^{Note3}	dBm/9. 36MHz	Config 1,2		-	-
	dBm/38 .16MHz	Config 3		-	-
	dBm/95 .04 MHz Note5	Config 1,2,3		-66.7	-57.2
Propagation Condition		Config 1,2,3	AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone					
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.6.2.8.2 Test Requirements

In test 1 with per-UE gap and in test 3 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 2 with per-UE gap and in test 4 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

107520 for UE supporting power class 1, or

66560 for UE supporting other power class.

In test 1, 2, 3 and 4 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.9 SA event triggered reporting tests For FR2 without SSB time index detection when DRX is not used (PCell in FR2) (rel16 additional mandatory gap pattern 17)

A.7.6.2.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.9.1-1, A.7.6.2.9.1-2, and A.7.6.2.9.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.9.1-1.

Table A.7.6.2.9.1-1 SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.7.6.2.9.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection (GP17)

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	17	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-30	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	5	

T2	s	Config 1	6 (PC1) 4 (other PC)	
----	---	----------	-------------------------	--

Table A.7.6.2.9.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection (GP17)

Parameter		Unit	Test configuration	Cell 1		Cell 1	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam assumption ^{Note 7}			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
TCI configuration			Config 1	CSI-RS.Config.0		N/A	
EPRE ratio of PSS to SSS			Config 1	0	0		
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							

N_{oc} ^{Note2}	dBm/15 kHz Note5		N/A		N/A	
N_{oc} ^{Note2}	dBm/S CS Note4	Config 1	N/A		N/A	
SS-RSRP ^{Note 3}	dBm/S CS Note5	Config 1	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot}$	dB	Config 1	N/A	N/A	-Infinity	N/A
$\hat{E}_s / N_{oc}$	dB	Config 1	N/A	N/A	-Infinity	N/A
I_o ^{Note3}	dBm/95 .04 MHz Note5	Config 1	-58.01	-58.01	-Infinity	-58.01
Propagation Condition		Config 1	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.6.2.9.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 5120ms (PC1) or 3200ms (other than PC1) from the beginning of time period T2.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.10 SA event triggered reporting test without gap under non-DRX

A.7.6.2.10.1 Test Purpose and Environment

The purpose of this test is to verify that if UE supports *interFrequencyMeas-NoGap-r16* and the flag *interFrequencyConfig-NoGap-r16* is configured by the network, the UE makes correct reporting of an event. This test will partly verify the inter-frequency without gap cell search requirements in clause 9.3.9. Supported test configurations are shown in table A.7.6.2.10.1-1.

Table A.7.6.2.10.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

There are two cells in the test, NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The SSB of Cell 2 is completely within UE's active BWP BW. The RBs containing SSB from cell 1 and cell 2 should be different in frequency location within the cell bandwidth. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.2.10.1-2, A.7.6.2.10.1-3 and A.7.6.2.10.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.2.10.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1	PCell (Cell 1)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		1	Cell 2	NR cell 2 is on NR RF channel number 2.
RF Channel Number		1	1, 2	Two FR2 NR carrier frequencies is used.
SMTC configuration		1	SMTC.1	
A3-Offset	dB	1	-6	
CP length		1	Normal	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX		1	OFF	
Time offset between Cell 1 and Cell 2		1	3 μ s	Synchronous cells
T1	s	1	5	
T2	s	1	5	

Table A.7.6.2.10.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1	SSB		SSB	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	

TRS configuration		1	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1	TCI.State.2	N/A
OCNG Patterns		1	OP.1	OP.1
SSB		1	SSB.3 FR2	SSB.3 FR2
Propagation Condition		1	AWGN	

Table A.7.6.2.10.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 defined in A.3.15.1			
Beam assumption ^{Note 4}		1	Rough		Rough	
$\hat{E}_s / I_{ot\ BB}$ ^{Note 5}	dB	1	3.45	3.45	-Infinity	7.45
N_{oc} ^{Note 2}	dBm/15 KHz	1	-102			
N_{oc} ^{Note 2}	dBm/SCS	1	-93			
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-85
$\hat{E}_s / N_{oc}$	dB	1	4	4	-Infinity	8
I_o	dBm/95.04MHz	1	-58.56	-58.56	-63.95	-55.38
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SSB_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 5: Calculation of $E_s/I_{ot\ BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.						

A.7.6.2.10.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 2.4s for a UE supporting power class 1,
- 1.44s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.11 SA event triggered reporting test without gap under DRX

A.7.6.2.11.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD inter-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2. Supported test configurations are shown in table A.7.6.2.11.1-1.

Table A.7.6.2.11.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test: PCell (Cell 1) on NR RF channel 1 and a FR2 neighbour cell (Cell 2) on NR RF channel 2. The SSB of Cell 2 is completely within UE's active BWP BW. The RBs containing SSB from cell 1 and cell 2 should be different in frequency location within the cell bandwidth. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.2.11.1-2 ~ 6.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.11.1-2: General test parameters for inter-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Value	Comment
NR RF Channel Number		1, 2	1, 2	2 TDD carrier frequency are used for the NR cells.
Active cell		1, 2	PCell (Cell 1)	Cell 1 is on NR RF channel number 1.
Neighbour cell		1, 2	Cell 2	Cell to be identified. Cell 2 is on NR RF channel number 2.
SMTC configuration		1, 2	SMTC.1	
A3-Offset	dB	1, 2	-6	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	DRX.7	
Time offset between Cell 1 and Cell 2		1, 2	3 μ s	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	52	

Table A.7.6.2.11.1-3: NR Cell specific test parameters for inter-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		1, 2	1		2	
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Intial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1, 2	DLBWP.1.1		N/A	
Active UL BWP configuration		1, 2	ULBWP.1.1		N/A	
RLM-RS		1, 2	SSB		N/A	
PDSCH RMC configuration		1, 2	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.3.1 TDD		N/A	
TRS configuration		1, 2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2	TCI.State.2		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
SSB		1	SSB.3 FR2		SSB.3 FR2	
		2	SSB.4 FR2		SSB.4 FR2	
Propagation Condition		1, 2	AWGN			

Table A.7.6.2.11.1-4: NR OTA Cell specific test parameters for inter-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 1 defined in A.3.15.1			
Beam assumption ^{Note 4}		1,2	Rough		Rough	
$\hat{E}_s / I_{ot_BB}$ ^{Note 5}	dB	1, 2	3.77	3.77	-Infinity	3.77
N_{oc} ^{Note 2}	dBm/15 KHz	1, 2	-98			
N_{oc} ^{Note 2}	dBm/SCS	1	-89			
		2	-86			
SSB_RP	dBm/SCS	1	-85	-85	-Infinity	-85
		2	-82	-82	-Infinity	-82
$\hat{E}_s / N_{oc}$	dB	1, 2	4	4	-Infinity	4
I_o	dBm/95.04MHz	1	-54.53	-54.53	-59.98	-54.53

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SSB_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.
Note 5:	Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_s from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.2.11.2 Test Requirements

In test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.2s for a UE supporting power class 1,
- 30.72s for a UE supporting power class 2, 3 and 4est

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.12 SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is not used (PCell in FR2-2)

A.7.6.2.12.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.1.12-1, A.7.6.2.12.1-2, and A.7.6.2.12.1-3.

Measurement gap pattern configuration defined in Table A.7.6.2.12.1-2 is provided for a UE that does not support per-FR gap, and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.12.1-1.

Table A.7.6.2.12.1-1 SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.6.2.12.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1	Two FR2 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
		Config 2	SSB.11 FR2	
		Config 3	SSB.12 FR2	
offsetMO	dB	Config 1,2,3	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1,2,3	-11	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3µs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	5.2 for PC1; 3.5 for other PC	

Table A.7.6.2.12.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1,2,3	Setup 3 as specified in clause A.3.15			
Beam Assumption ^{Note 7}		1,2,3	AoA1		AoA2	
NR RF Channel Number		Config 1,2,3	1		2	
Duplex mode		Config 1,2,3	TDD		TDD	

TDD configuration			Config 1,2,3	TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
			Config 2	400: N _{RB,c} = 66		400: N _{RB,c} = 66	
			Config 3	400: N _{RB,c} = 33		400: N _{RB,c} = 33	
Data RBs allocated			Config 1	66		66	
			Config 2	66		66	
			Config 3	33		33	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
			Config 2	400: N _{RB,c} = 66		400: N _{RB,c} = 66	
			Config 3	400: N _{RB,c} = 33		400: N _{RB,c} = 33	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2,3	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1,2,3	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1,2,3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,3	120		120	
TRS configuration			Config 1,2,3	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1,2,3	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
Ê _s		dBm/S CS	Config 1	-87	-87	-Infinity	-87
			Config 2	-81	-81	-Infinity	-81
			Config 3	-78	-78	-Infinity	-78
SSBRP ^{Note 3}		dBm/S CS ^{Note5}	Config 1	-87	-87	-Infinity	-87
			Config 2	-81	-81	-Infinity	-81
			Config 3	-78	-78	-Infinity	-78
Ê _s /I _{ot BB} ^{Note 8}		dB	Config 1,2,3	1.89	1.89	-Infinity	1.89

I_o^{Note3}	dBm/95 .04 MHz Note5	Config 1,2,3	-58.01	-58.01	-Infinity	-58.01
Propagation Condition		Config 1,2,3	No external noise (Note 9)		No external noise (Note 9)	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void						
Note 3: SSB RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Void						
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 8: Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_s from TS 38.101-2 [19] Table 6.2.1.3-4.						
Note 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].						

A.7.6.2.12.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

7.68s ($96 \cdot 40\text{ms} + 96 \cdot 40\text{ms}$) for UE supporting power class 1, or

4.8s ($60 \cdot 40\text{ms} + 60 \cdot 40\text{ms}$) for UE supporting other power class.

For Configuration 2,

11.52s ($192 \cdot 40\text{ms} + 96 \cdot 40\text{ms}$) for UE supporting power class 1, or

7.2s ($120 \cdot 40\text{ms} + 60 \cdot 40\text{ms}$) for UE supporting other power class.

For Configuration 3,

15.36s ($288 \cdot 40\text{ms} + 96 \cdot 40\text{ms}$) for UE supporting power class 1, or

9.6s ($180 \cdot 40\text{ms} + 60 \cdot 40\text{ms}$) for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \cdot \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.13 SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is used (PCell in FR2-2)

A.7.6.2.13.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.13.1-1, A.7.6.2.13.1-2, and A.7.6.2.13.1-3.

Measurement gap pattern configuration defined in Table A.7.6.2.13.1-2 is provided for a UE that does not support per-FR gap, and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.13.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.13.1-1: SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.6.2.13.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		As specified in clause A.3.10.2
		Config 2	SSB.11 FR2		
		Config 3	SSB.12 FR2		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		

TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.1	DRX.7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table A.7.6.2.13.1-3: Cell specific test parameters for CA inter-frequency event triggered reporting without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1,2,3	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1,2,3	Rough		Rough	
NR RF Channel Number			Config 1,2,3	1		2	
TDD configuration			Config 1,2,3	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1,2,3	TDD		TDD	
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
			Config 2	400: N _{RB,c} = 66		400: N _{RB,c} = 66	
			Config 3	400: N _{RB,c} = 33		400: N _{RB,c} = 33	
Data RBs allocated			Config 1	66		66	
			Config 2	66		66	
			Config 3	33		33	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
			Config 2	400: N _{RB,c} = 66		400: N _{RB,c} = 66	
			Config 3	400: N _{RB,c} = 33		400: N _{RB,c} = 33	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2,3	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1,2,3	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1,2,3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,3	120		120	
TRS configuration			Config 1,2,3	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1,2,3	TCI.State.2		N/A	
EPRE ratio of PSS to SSS							
EPRE ratio of PBCH DMRS to SSS							

EPRE ratio of PBCH to PBCH DMRS		Config 1,2,3	0	0		
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz Note5	Config 1,2,3	-104.7		-104.7	
N_{oc} Note2	dBm/S CS Note4	Config 1	-95.7		-95.7	
		Config 2	-89.7		-89.7	
		Config 3	-86.7		-86.7	
SS-RSRP Note 3	dBm/S CS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
		Config 2	-83.7	-83.7	-Infinity	-80.7
		Config 3	-80.7	-80.7	-Infinity	-77.7
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	6	6	-Infinity	9
I_o Note3	dBm/95 .04 MHz Note5	Config 1,2,3	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1,2,3	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Void						
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.6.2.13.2 Test Requirements

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

For Configuration 1,

11.52s (96*40ms*1.5 + 96*40ms*1.5) for UE supporting power class 1, or

7.2s (60*40ms*1.5 + 60*40ms*1.5) for UE supporting other power class.

For Configuration 2,

17.28s ($192 \times 40\text{ms} \times 1.5 + 96 \times 40\text{ms} \times 1.5$) for UE supporting power class 1, or

10.80s ($120 \times 40\text{ms} \times 1.5 + 60 \times 40\text{ms} \times 1.5$) for UE supporting other power class.

For Configuration 3,

23.04s ($288 \times 40\text{ms} \times 1.5 + 96 \times 40\text{ms} \times 1.5$) for UE supporting power class 1, or

14.40s ($180 \times 40\text{ms} \times 1.5 + 60 \times 40\text{ms} \times 1.5$) for UE supporting other power class.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

For Configuration 1,

122.88s ($96 \times 640\text{ms} + 96 \times 640\text{ms}$) for UE supporting power class 1, or

76.80s ($60 \times 640\text{ms} + 60 \times 640\text{ms}$) for UE supporting other power class.

For Configuration 2,

184.32s ($192 \times 640\text{ms} + 96 \times 640\text{ms}$) for UE supporting power class 1, or

115.20s ($120 \times 640\text{ms} + 60 \times 640\text{ms}$) for UE supporting other power class.

For Configuration 3,

245.76s ($288 \times 640\text{ms} + 96 \times 640\text{ms}$) for UE supporting power class 1, or

153.60s ($180 \times 640\text{ms} + 60 \times 640\text{ms}$) for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.14 SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is not used (PCell in FR2-2)

A.7.6.2.14.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.14.1-1, A.7.6.2.14.1-2, and A.7.6.2.14.1-3.

Measurement gap pattern configuration defined in Table A.7.6.2.14.1-2 is provided for a UE that does not support per-FR gap, and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.14.1-1.

Table A.7.6.2.14.1-1: SA event triggered reporting tests with SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.6.2.14.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
		Config 2	SSB.11 FR2	
		Config 3	SSB.12 FR2	
offsetMO	dB	Config 1,2,3	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1,2,3	-11	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	7 for PC1; 4.5 for other PC	

Table A.7.6.2.14.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2-2 with SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1,2,3	Setup 3 as specified in clause A.3.15			
			AoA1		AoA2	
Beam Assumption ^{Note 7}		Config 1,2,3	Rough		Rough	
NR RF Channel Number		Config 1,2,3	1		2	
Duplex mode		Config 1,2,3	TDD		TDD	
TDD configuration		Config 1,2,3	TDDConf.3.1		TDDConf.3.1	

BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
			Config 2	400: N _{RB,c} = 66		100: N _{RB,c} = 66	
			Config 3	400: N _{RB,c} = 33		100: N _{RB,c} = 33	
			Config 1	66		66	
			Config 2	66		66	
			Config 3	33		33	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
			Config 2	400: N _{RB,c} = 66		400: N _{RB,c} = 66	
			Config 3	400: N _{RB,c} = 33		400: N _{RB,c} = 33	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2,3	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1,2,3	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1,2,3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,3	120		120	
TRS configuration			Config 1,2,3	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1,2,3	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
$\hat{E}_s$		dBm/S CS	Config 1	-87	-87	-Infinity	-87
			Config 2	-81	-81	-Infinity	-81
			Config 3	-78	-78	-Infinity	-78
SSBRP ^{Note 3}		dBm/S CS ^{Note5}	Config 1	-87	-87	-Infinity	-87
			Config 2	-81	-81	-Infinity	-81
			Config 3	-78	-78	-Infinity	-78
$\hat{E}_s/I_{ot_BB}$ ^{Note 8}		dB	Config 1,2,3	1.89	1.89	-Infinity	1.89

Io	Note3	dBm/95 .04 MHz Note5	Config 1,2,3	-58.01	-58.01	-Infinity	-58.01
Propagation Condition			Config 1,2,3	No external noise (Note 9)		No external noise (Note 9)	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Void							
Note 3: SBRP, Es/lot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: Void							
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone							
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone							
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation							
Note 8: Calculation of Es/lotBB includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMBs from TS 38.101-2 [19] Table 6.2.1.3-4.							
Note 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].							

A.7.6.2.14.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

10.56s ($96 \cdot 40\text{ms} + 96 \cdot 40\text{ms} + 72 \cdot 40\text{ms}$) for UE supporting power class 1, or

6.72s ($60 \cdot 40\text{ms} + 60 \cdot 40\text{ms} + 48 \cdot 40\text{ms}$) for UE supporting other power class.

For Configuration 2,

14.4s ($192 \cdot 40\text{ms} + 96 \cdot 40\text{ms} + 72 \cdot 40\text{ms}$) for UE supporting power class 1, or

9.12s ($120 \cdot 40\text{ms} + 60 \cdot 40\text{ms} + 48 \cdot 40\text{ms}$) for UE supporting other power class.

For Configuration 3,

18.24s ($288 \cdot 40\text{ms} + 96 \cdot 40\text{ms} + 72 \cdot 40\text{ms}$) for UE supporting power class 1, or

11.52s ($180 \cdot 40\text{ms} + 60 \cdot 40\text{ms} + 48 \cdot 40\text{ms}$) for UE supporting other power class.

The UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \cdot TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.15 SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is used (PCell in FR2-2)

A.7.6.2.15.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.15.1-1, A.7.6.2.15.1-2, and A.7.6.2.15.1-3.

Measurement gap pattern configuration defined in Table A.7.6.2.15.1-2 is provided for a UE that does not support per-FR gap, and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.15.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.15.1-1: SA event triggered reporting tests with SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.7.6.2.15.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		As specified in clause A.3.10.2
		Config 2	SSB.11 FR2		
		Config 3	SSB.12 FR2		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		

Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.1	DRX.7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	

Table A.7.6.2.15.1-3: Cell specific test parameters for CA inter-frequency event triggered reporting with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1,2,3	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1,2,3	Rough		Rough	
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1,2,3	TDD		TDD	
TDD configuration			Config 1,2,3	TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
			Config 2	400: N _{RB,c} = 66		400: N _{RB,c} = 66	
			Config 3	400: N _{RB,c} = 33		400: N _{RB,c} = 33	
			Config 1	66		66	
			Config 2	66		66	
			Config 3	33		33	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
			Config 2	400: N _{RB,c} = 66		400: N _{RB,c} = 66	
			Config 3	400: N _{RB,c} = 33		400: N _{RB,c} = 33	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2,3	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1,2,3	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1,2,3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,3	120		120	
TRS configuration			Config 1,2,3	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1,2,3	TCI.State.2		N/A	
EPRE ratio of PSS to SSS							
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							

EPRE ratio of PDCCH DMRS to SSS		Config 1,2,3	0	0		
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz Note5		-104.7	-104.7		
N_{oc} ^{Note2}	dBm/S CS Note4	Config 1	-95.7	-95.7	-95.7	-95.7
		Config 2	-89.7	-89.7	-89.7	-89.7
		Config 3	-86.7	-86.7	-86.7	-86.7
SS-RSRP ^{Note 3}	dBm/S CS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
		Config 2	-83.7	-83.7	-Infinity	-80.7
		Config 3	-80.7	-80.7	-Infinity	-77.7
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	6	6	-Infinity	9
I_o ^{Note3}	dBm/95 .04 MHz Note5	Config 1,2,3	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1,2,3	AWGN	AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Void Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.6.2.15.2 Test Requirements

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

For Configuration 1,

15.84s (96*40ms*1.5+96*40ms*1.5+72*40ms*1.5) for UE supporting power class 1, or

10.08s (60*40ms*1.5+60*40ms*1.5+48*40ms*1.5) for UE supporting other power class.

For Configuration 2,

21.6s ($192 \times 40\text{ms} \times 1.5 + 96 \times 40\text{ms} \times 1.5 + 72 \times 40\text{ms} \times 1.5$) for UE supporting power class 1, or

13.68s ($120 \times 40\text{ms} \times 1.5 + 60 \times 40\text{ms} \times 1.5 + 48 \times 40\text{ms} \times 1.5$) for UE supporting other power class.

For Configuration 3,

27.36s ($288 \times 40\text{ms} \times 1.5 + 96 \times 40\text{ms} \times 1.5 + 48 \times 40\text{ms} \times 1.5$) for UE supporting power class 1, or

17.28s ($180 \times 40\text{ms} \times 1.5 + 60 \times 40\text{ms} \times 1.5 + 48 \times 40\text{ms} \times 1.5$) for UE supporting other power class.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

For Configuration 1,

168.96s ($96 \times 640\text{ms} + 96 \times 640\text{ms} + 72 \times 640\text{ms}$) for UE supporting power class 1, or

107.52s ($60 \times 640\text{ms} + 60 \times 640\text{ms} + 48 \times 640\text{ms}$) for UE supporting other power class.

For Configuration 2,

230.4s ($192 \times 640\text{ms} + 96 \times 640\text{ms} + 72 \times 640\text{ms}$) for UE supporting power class 1, or

145.92s ($120 \times 640\text{ms} + 60 \times 640\text{ms} + 48 \times 640\text{ms}$) for UE supporting other power class.

For Configuration 3,

291.84s ($288 \times 640\text{ms} + 96 \times 640\text{ms} + 72 \times 640\text{ms}$) for UE supporting power class 1, or

184.32s ($180 \times 640\text{ms} + 60 \times 640\text{ms} + 48 \times 640\text{ms}$) for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.16 SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is not used (PCell in FR1)

A.7.6.2.16.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.16.1-1, A.7.6.2.16.1-2, and A.7.6.2.16.1-3.

In test 1 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.16.1-2 is provided for a UE that does not support per-FR gap and in test 2 no gap pattern is configured as defined in Table A.7.6.2.16.1-2. If the UE supports per-FR gap, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.16.1-1.

Table A.7.6.2.16.1-1 SA event triggered reporting tests without SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
9	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.7.6.2.16.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3,4,5,6,7,8,9	1, 2		One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3,4,5,6,7,8,9	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6,7,8,9	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6,7,8,9	0	Gap not configured	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6,7,8,9	39	N/A	
SMTC-SSB parameters on NR RF Channel 1		Config 1,4,7	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2,5,8	SSB.1 FR1		
		Config 3,6,9	SSB.2 FR1		
CSI-RS for tracking parameters on NR RF Channel 1		Config 1,4,7	TRS.1.1 FDD		
		Config 2,5,8	TRS.1.1 TDD		
		Config 3,6,9	TRS.1.2 TDD		
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2		As specified in clause A.3.10.2
		Config 4,5,6	SSB.11 FR2		
		Config 7,8,9	SSB.12 FR2		
offsetMO	dB	Config 1,2,3,4,5,6,7,8,9	6		
Hysteresis	dB	Config 1,2,3,4,5,6,7,8,9	0		
a4-Threshold	dBm	Config 1,2,3,4,5,6,7,8,9	-105		

CP length		Config 1,2,3,4,5,6,7,8,9	Normal	
TimeToTrigger	s	Config 1,2,3,4,5,6,7,8,9	0	
Filter coefficient		Config 1,2,3,4,5,6,7,8,9	0	L3 filtering is not used
DRX		Config 1,2,3,4,5,6,7,8,9	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,4,7	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3,5,6,8,9	3μs	Synchronous cells.
T1	s	Config 1,2,3,4,5,6,7,8,9	5	
T2	s	Config 1,2,3,4,5,6,7,8,9	5.2 for PC1; 3.5 for other PC	3 for PC1; 2 for other PC

Table A.7.6.2.16.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6,7,8,9	N/A		Setup 1 as specified in clause A.3.15	
Beam Assumption ^{Note 7}		Config 1,2,3,4,5,6,7,8,9	N/A		Rough	
NR RF Channel Number		Config 1,2,3,4,5,6,7,8,9	1		2	
Duplex mode		Config 1,4,7	FDD		TDD	
		Config 2,3,5,6,8,9	TDD		TDD	
TDD configuration		Config 1,4,7	Not Applicable		TDDConf.3.1	
		Config 2,5,8	TDDConf.1.1		TDDConf.3.1	
		Config 3,6,9	TDDConf.2.1		TDDConf.3.1	
BW _{channel}	MHz	Config 1	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 2	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 3	40: N _{RB,c} = 106		100: N _{RB,c} = 66	
		Config 4	10: N _{RB,c} = 52		400: N _{RB,c} = 66	
		Config 5	10: N _{RB,c} = 52		400: N _{RB,c} = 66	
		Config 6	40: N _{RB,c} = 106		400: N _{RB,c} = 66	
		Config 7	10: N _{RB,c} = 52		400: N _{RB,c} = 33	
		Config 8	10: N _{RB,c} = 52		400: N _{RB,c} = 33	
Data RBs allocated		Config 9	40: N _{RB,c} = 106		400: N _{RB,c} = 33	
		Config 1	52		66	

			Config 2	52	66
			Config 3	106	66
			Config 4	52	66
			Config 5	52	66
			Config 6	106	66
			Config 7	52	33
			Config 8	52	33
			Config 9	106	33
BWP BW		MHz	Config 1	10: $N_{RB,c} = 52$	100: $N_{RB,c} = 66$
			Config 2	10: $N_{RB,c} = 52$	100: $N_{RB,c} = 66$
			Config 3	40: $N_{RB,c} = 106$	100: $N_{RB,c} = 66$
			Config 4	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 66$
			Config 5	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 66$
			Config 6	40: $N_{RB,c} = 106$	400: $N_{RB,c} = 66$
			Config 7	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 33$
			Config 8	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 33$
			Config 9	40: $N_{RB,c} = 106$	400: $N_{RB,c} = 33$
BWP configuration	Initial DL BWP		Config 1,2,3,4,5,6,7,8,9	DLBWP.0.1	N/A
	Initial UL BWP			ULBWP.0.1	N/A
	Dedicated DL BWP			DLBWP.1.1	N/A
	Dedicated UL BWP			ULBWP.1.1	N/A
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4,5,6,7,8,9	OP.1	OP.1
PDSCH Reference measurement channel			Config 1,4,7	SR.1.1 FDD	-
			Config 2,5,8	SR.1.1 TDD	
			Config 3,6,9	SR.2.1 TDD	
RMSI CORESET Reference Channel			Config 1,4,7	CR.1.1 FDD	-
			Config 2,5,8	CR.1.1 TDD	
			Config 3,6,9	CR.2.1 TDD	
Dedicated CORESET RMC configuration			Config 1,4,7	CCR.1.1 FDD	-
			Config 2,5,8	CCR.1.1 TDD	
			Config 3,6,9	CCR.2.1 TDD	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1,4,7	SMTC.2	SMTC.2
			Config 2,3,5,6,8,9	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4,5,7,8	15	120
			Config 3,6,9	30	120
EPRE ratio of PSS to SSS			Config 1,2,3,4,5,6,7,8,9	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					

EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
$\hat{E}_s$	dBm/S CS	Config 1,2,3		-Infinity	-87
		Config 4,5,6		-Infinity	-81
		Config 7,8,9		-Infinity	-78
SSB_RP ^{Note 3}	dBm/S CS Note5	Config 1,2,3	NA Link only, see clause A.3.7A	-Infinity	-87
		Config 4,5,6		-Infinity	-81
		Config 7,8,9		-Infinity	-78
ϵ_{BB} ^{Note 8}	dB	Config 1,2,3,4,5,6,7, 8,9		-Infinity	14.69
	dBm/95 .04 MHz Note5	Config 1,2,3,4,5,6,7, 8,9			-Infinity
Propagation Condition		Config 1,2,3,4,5,6,7, 8,9		No external noise (Note 9)	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Void					
Note 3: SS B_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: Void					
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone					
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					
Note 8: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _S from TS 38.101-2 [19] Table 6.2.1.3-4.					
Note 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].					

A.7.6.2.16.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,2,3

7.68s (96*40ms+96*40ms) for UE supporting power class 1, or

4.8s (60*40ms + 60*40ms) for UE supporting other power class.

For Configuration 4,5,6

11.52s (192*40ms+96*40ms) for UE supporting power class 1, or

7.2s (120*40ms + 60*40ms) for UE supporting other power class.

For Configuration 7,8,9

15.36s (288*40ms+96*40ms) for UE supporting power class 1, or

9.6s ($180 \times 40\text{ms} + 60 \times 40\text{ms}$) for UE supporting other power class.

In test 2, without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,2,3

3.84s ($96 \times 20\text{ms} + 96 \times 20\text{ms}$) for UE supporting power class 1, or

2.4s ($60 \times 20\text{ms} + 60 \times 20\text{ms}$) for UE supporting other power class.

For Configuration 4,5,6

5.76s ($192 \times 20\text{ms} + 96 \times 20\text{ms}$) for UE supporting power class 1, or

3.6s ($120 \times 20\text{ms} + 60 \times 20\text{ms}$) for UE supporting other power class.

For Configuration 7,8,9

7.68s ($288 \times 20\text{ms} + 96 \times 20\text{ms}$) for UE supporting power class 1, or

4.8s ($180 \times 20\text{ms} + 60 \times 20\text{ms}$) for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.17 SA event triggered reporting tests for FR2-2 without SSB time index detection when DRX is used (PCell in FR1)

A.7.6.2.17.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.17.1-1, A.7.6.2.17.1-2, and A.7.6.2.17.1-3.

In test 1&2 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.17.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 no gap pattern is configured as defined in Table A.7.6.2.17.1-2. If a UE supports per-FR gap it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.17.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.17.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
9	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.7.6.2.17.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter	Unit	Test configuration n	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1,2,3,4,5,6,7,8,9	1, 2				One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3,4,5,6,7,8,9	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6,7,8,9	NR cell 2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6,7,8,9	0		Gap not configured		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6,7,8,9	39		N/A		
SMTC-SSB parameters on NR RF Channel 1		Config 1,4,7	SSB.1 FR1				As specified in clause A.3.10.1
		Config 2,5,8	SSB.1 FR1				
		Config 3,6,9	SSB.2 FR1				
CSI-RS for tracking parameters on NR RF Channel 1		Config 1,4,7	TRS.1.1 FDD				
		Config 2,5,8	TRS.1.1 TDD				
		Config 3,6,9	TRS.1.2 TDD				
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2				As specified in clause A.3.10.2
		Config 4,5,6	SSB.11 FR2				
		Config 7,8,9	SSB.12 FR2				
<i>offsetMO</i>	dB	Config 1,2,3,4,5,6,7,8,9	6				
Hysteresis	dB	Config 1,2,3,4,5,6,7,8,9	0				
<i>a4-Threshold</i>	dBm	Config 1,2,3,4,5,6,7,8,9	-105				

CP length		Config 1,2,3,4,5,6,7, 7,8,9	Normal				
TimeToTrigger	s	Config 1,2,3,4,5,6,7, 8,9	0				
Filter coefficient		Config 1,2,3,4,5,6,7, 8,9	0				L3 filtering is not used
DRX		Config 1,2,3,4,5,6,7, 8,9	DRX .1	DRX .7	DRX .1	DRX .7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,4,7	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3,5,6,8,9	3μs				Synchronous cells.
T1	s	Config 1,2,3,4,5,6,7, 8,9	5				
T2	s	Config 1,2,3,4,5,6,7, 8,9	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table A.7.6.2.17.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6,7, 8,9	NA		Setup 1 as specified in clause A.3.15	
NR RF Channel Number		Config 1,2,3,4,5,6,7, 8,9	1		2	
Duplex mode		Config 1,4,7	FDD		TDD	
		Config 2,3,5,6,8,9	TDD		TDD	
TDD configuration		Config 1,4,7	Not Applicable		TDDConf.3.1	
		Config 2,5,8	TDDConf.1.1		TDDConf.3.1	
		Config 3,6,9	TDDConf.2.1		TDDConf.3.1	
BW _{channel}	MHz	Config 1	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 2	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 3	40: N _{RB,c} = 106		100: N _{RB,c} = 66	
		Config 4	10: N _{RB,c} = 52		400: N _{RB,c} = 66	
		Config 5	10: N _{RB,c} = 52		400: N _{RB,c} = 66	
		Config 6	40: N _{RB,c} = 106		400: N _{RB,c} = 66	
		Config 7	10: N _{RB,c} = 52		400: N _{RB,c} = 33	
		Config 8	10: N _{RB,c} = 52		400: N _{RB,c} = 33	
		Config 9	40: N _{RB,c} = 106		400: N _{RB,c} = 33	

Data RBs allocated			Config 1	52	66
			Config 2	52	66
			Config 3	106	66
			Config 4	52	66
			Config 5	52	66
			Config 6	106	66
			Config 7	52	33
			Config 8	52	33
			Config 9	106	33
BWP BW		MHz	Config 1	10: $N_{RB,c} = 52$	100: $N_{RB,c} = 66$
			Config 2	10: $N_{RB,c} = 52$	100: $N_{RB,c} = 66$
			Config 3	40: $N_{RB,c} = 106$	100: $N_{RB,c} = 66$
			Config 4	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 66$
			Config 5	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 66$
			Config 6	40: $N_{RB,c} = 106$	400: $N_{RB,c} = 66$
			Config 7	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 33$
			Config 8	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 33$
			Config 9	40: $N_{RB,c} = 106$	400: $N_{RB,c} = 33$
BWP configuration	Initial DL BWP		Config 1,2,3,4,5,6,7,8,9	DLBWP.0.1	N/A
	Initial UL BWP			ULBWP.0.1	N/A
	Dedicated DL BWP			DLBWP.1.1	N/A
	Dedicated UL BWP			ULBWP.1.1	N/A
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4,5,6,7,8,9	OP.1	OP.1
PDSCH Reference measurement channel			Config 1,4,7	SR.1.1 FDD	-
			Config 2,5,8	SR.1.1 TDD	
			Config 3,6,9	SR.2.1 TDD	
RMSI CORESET Reference Channel			Config 1,4,7	CR.1.1 FDD	-
			Config 2,5,8	CR.1.1 TDD	
			Config 3,6,9	CR.2.1 TDD	
Dedicated CORESET RMC configuration			Config 1,4,7	CCR.1.1 FDD	-
			Config 2,5,8	CCR.1.1 TDD	
			Config 3,6,9	CCR.2.1 TDD	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1,4,7	SMTC.2	SMTC.2
			Config 2,3,5,6,8,9	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4,5,7,8	15	120
			Config 3,6,9	30	120
EPRE ratio of PSS to SSS			Config 1,2,3,4,5,6,7,8,9	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					

EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} ^{Note2}	dBm/15 kHz Note5		NA Link only, see clause A.3.7A	-104.7	
N_{oc} ^{Note2}	dBm/S CS Note4	Config 1,2,3		-95.7	
		Config 4,5,6		-89.7	
		Config 7,8,9		-86.7	
SSB_RP ^{Note 3}	dBm/S CS Note5	Config 1,2,3		-Infinity	-86.7
		Config 4,5,6		-Infinity	-80.7
		Config 7,8,9		-Infinity	-77.7
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6,7,8,9		-Infinity	9
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6,7,8,9		-Infinity	9
I_o ^{Note3}	dBm/95.04 MHz Note5	Config 1,2,3,4,5,6,7,8,9		-66.7	-57.2
Propagation Condition		Config 1,2,3,4,5,6,7,8,9	AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone					

A.7.6.2.17.2 Test Requirements

In test 1 with per-UE gap and in test 3 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

For Configuration 1,2,3

11.52s (96*40ms*1.5 + 96*40ms*1.5) for UE supporting power class 1, or

7.2s (60*40ms*1.5 + 60*40ms*1.5) for UE supporting other power class.

For Configuration 4,5,6

17.28s ($192 \cdot 40\text{ms} \cdot 1.5 + 96 \cdot 40\text{ms} \cdot 1.5$) for UE supporting power class 1, or

10.80s ($120 \cdot 40\text{ms} \cdot 1.5 + 60 \cdot 40\text{ms} \cdot 1.5$) for UE supporting other power class.

For Configuration 7,8,9

23.04s ($288 \cdot 40\text{ms} \cdot 1.5 + 96 \cdot 40\text{ms} \cdot 1.5$) for UE supporting power class 1, or

14.40s ($180 \cdot 40\text{ms} \cdot 1.5 + 60 \cdot 40\text{ms} \cdot 1.5$) for UE supporting other power class.

In test 2 with per-UE gap and in test 4 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

For Configuration 1,2,3

122.80s ($96 \cdot 640\text{ms} + 96 \cdot 640\text{ms}$) for UE supporting power class 1, or

76.80s ($60 \cdot 640\text{ms} + 60 \cdot 640\text{ms}$) for UE supporting other power class.

For Configuration 4,5,6

184.32s ($192 \cdot 640\text{ms} + 96 \cdot 640\text{ms}$) for UE supporting power class 1, or

115.20s ($120 \cdot 640\text{ms} + 60 \cdot 640\text{ms}$) for UE supporting other power class.

For Configuration 7,8,9

245.76s ($288 \cdot 640\text{ms} + 96 \cdot 640\text{ms}$) for UE supporting power class 1, or

153.60s ($180 \cdot 640\text{ms} + 60 \cdot 640\text{ms}$) for UE supporting other power class.

In test 1, 2, 3 and 4 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \cdot \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.18 SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is not used (PCell in FR1)

A.7.6.2.18.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.18.1-1, A.7.6.2.18.1-2, and A.7.6.2.18.1-3.

In test 1 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.18.1-2 is provided for a UE that does not support per-FR gap and in test 2 measurement no gap pattern is configured as defined in Table A.7.6.2.18.1-2. If the UE supports per-FR gap, it is only required to pass test 2. Otherwise it is only required to pass test 1.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.18.1-1.

Table A.7.6.2.18.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
9	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.7.6.2.18.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3,4,5,6,7,8,9	1, 2		One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3,4,5,6,7,8,9	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6,7,8,9	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6,7,8,9	0	Gap not configured	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6,7,8,9	39	N/A	
SMTC-SSB parameters on NR RF Channel 1		Config 1,4,7	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2,5,8	SSB.1 FR1		
		Config 3,6,9	SSB.2 FR1		
CSI-RS for tracking parameters on NR RF Channel 1		Config 1,4,7	TRS.1.1 FDD		
		Config 2,5,8	TRS.1.1 TDD		
		Config 3,6,9	TRS.1.2 TDD		
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2		As specified in clause A.3.10.2
		Config 4,5,6	SSB.11 FR2		
		Config 7,8,9	SSB.12 FR2		
offsetMO	dB	Config 1,2,3,4,5,6,7,8,9	6		

Hysteresis	dB	Config 1,2,3,4,5,6,7,8,9	0	
<i>a4-Threshold</i>	dBm	Config 1,2,3,4,5,6,7,8,9	-105	
CP length		Config 1,2,3,4,5,6,7,8,9	Normal	
TimeToTrigger	s	Config 1,2,3,4,5,6,7,8,9	0	
Filter coefficient		Config 1,2,3,4,5,6,7,8,9	0	L3 filtering is not used
DRX		Config 1,2,3,4,5,6,7,8,9	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,4,7	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3,5,6,8,9	3μs	Synchronous cells.
T1	s	Config 1,2,3,4,5,6,7,8,9	5	
T2	s	Config 1,2,3,4,5,6,7,8,9	5.2 for PC1; 3.5 for other PC	3 for PC1; 2 for other PC

Table A.7.6.2.18.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2-2 with SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6,7,8,9	N/A		Setup 1 as specified in clause A.3.15	
Beam Assumption ^{Note 7}		Config 1,2,3,4,5,6,7,8,9	N/A		Rough	
NR RF Channel Number		Config 1,2,3,4,5,6,7,8,9	1		2	
Duplex mode		Config 1,4,7	FDD		TDD	
		Config 2,3,5,6,8,9	TDD		TDD	
TDD configuration		Config 1,4,7	Not Applicable		TDDConf.3.1	
		Config 2,5,8	TDDConf.1.1		TDDConf.3.1	
		Config 3,6,9	TDDConf.2.1		TDDConf.3.1	
BW _{channel}	MHz	Config 1	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 2	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 3	40: N _{RB,c} = 106		100: N _{RB,c} = 66	
		Config 4	10: N _{RB,c} = 52		400: N _{RB,c} = 66	

		Config 5	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 66$
		Config 6	40: $N_{RB,c} = 106$	400: $N_{RB,c} = 66$
		Config 7	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 33$
		Config 8	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 33$
		Config 9	40: $N_{RB,c} = 106$	400: $N_{RB,c} = 33$
Data RBs allocated		Config 1	52	66
		Config 2	52	66
		Config 3	106	66
		Config 4	52	66
		Config 5	52	66
		Config 6	106	66
		Config 7	52	33
		Config 8	52	33
		Config 9	106	33
BWP BW	MHz	Config 1	10: $N_{RB,c} = 52$	100: $N_{RB,c} = 66$
		Config 2	10: $N_{RB,c} = 52$	100: $N_{RB,c} = 66$
		Config 3	40: $N_{RB,c} = 106$	100: $N_{RB,c} = 66$
		Config 4	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 66$
		Config 5	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 66$
		Config 6	40: $N_{RB,c} = 106$	400: $N_{RB,c} = 66$
		Config 7	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 33$
		Config 8	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 33$
		Config 9	40: $N_{RB,c} = 106$	400: $N_{RB,c} = 33$
BWP configuration	Initial DL BWP	Config 1,2,3,4,5,6,7,8,9	DLBWP.0.1	N/A
	Initial UL BWP		ULBWP.0.1	N/A
	Dedicated DL BWP		DLBWP.1.1	N/A
	Dedicated UL BWP		ULBWP.1.1	N/A
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6,7,8,9	OP.1	OP.1
PDSCH Reference measurement channel		Config 1,4,7	SR.1.1 FDD	-
		Config 2,5,8	SR.1.1 TDD	
		Config 3,6,9	SR.2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4,7	CR.1.1 FDD	-
		Config 2,5,8	CR.1.1 TDD	
		Config 3,6,9	CR.2.1 TDD	
Dedicated CORESET RMC configuration		Config 1,4,7	CCR.1.1 FDD	-
		Config 2,5,8	CCR.1.1 TDD	
		Config 3,6,9	CCR.2.1 TDD	
SMTTC configuration defined in A.3.11.1 and A.3.11.2		Config 1,4,7	SMTTC.2	SMTTC.2
		Config 2,3,5,6,8,9	SMTTC.1	SMTTC.1
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5,7,8	15	120
		Config 3,6,9	30	120
EPRE ratio of PSS to SSS				
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				

EPRE ratio of PDCCH DMRS to SSS		Config 1,2,3,4,5,6,7, 8,9	0	0		
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
$\hat{E}_s$	dBm/S CS	Config 1,2,3		-Infinity	-87	
		Config 4,5,6		-Infinity	-81	
		Config 7,8,9	NA Link only, see clause A.3.7A	-Infinity	-78	
SSB_RP ^{Note 3}	dBm/S CS Note5	Config 1,2,3		-Infinity	-87	
		Config 4,5,6		-Infinity	-81	
		Config 7,8,9		-Infinity	-78	
$E_{s,lot_{BB}}$ ^{Note 8}	dB	Config 1,2,3,4,5,6,7, 8,9		A.3.7A	-Infinity	14.69
	dBm/95 .04 MHz Note5	Config 1,2,3,4,5,6,7, 8,9			-Infinity	-58.01
Propagation Condition		Config 1,2,3,4,5,6,7, 8,9	No external noise (Note 9)			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void						
Note 3: SS B_RP, Es/lot and lo levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Void						
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 8: Calculation of Es/lot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _s from TS 38.101-2 [19] Table 6.2.1.3-4.						
Note 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].						

A.7.6.2.18.2 Test Requirements

In test 1 with per-UE gap and in test 2 with per-FR gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,2,3

10.56s (96*40ms+96*40ms+72*40ms) for UE supporting power class 1, or

6.72s (60*40ms + 60*40ms+48*40ms) for UE supporting other power class.

For Configuration 4,5,6

14.4s ($192 \cdot 40\text{ms} + 96 \cdot 40\text{ms} + 72 \cdot 40\text{ms}$) for UE supporting power class 1, or

9.12s ($120 \cdot 40\text{ms} + 60 \cdot 40\text{ms} + 48 \cdot 40\text{ms}$) for UE supporting other power class.

For Configuration 7,8,9

18.24s ($288 \cdot 40\text{ms} + 96 \cdot 40\text{ms} + 72 \cdot 40\text{ms}$) for UE supporting power class 1, or

11.52s ($180 \cdot 40\text{ms} + 60 \cdot 40\text{ms} + 48 \cdot 40\text{ms}$) for UE supporting other power class.

In test 2 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,2,3

5.28s ($96 \cdot 20\text{ms} + 96 \cdot 20\text{ms} + 72 \cdot 20\text{ms}$) for UE supporting power class 1, or

3.36s ($60 \cdot 20\text{ms} + 60 \cdot 20\text{ms} + 48 \cdot 20\text{ms}$) for UE supporting other power class.

For Configuration 4,5,6

7.2s ($192 \cdot 20\text{ms} + 96 \cdot 20\text{ms} + 72 \cdot 20\text{ms}$) for UE supporting power class 1, or

4.56s ($120 \cdot 20\text{ms} + 60 \cdot 20\text{ms} + 48 \cdot 20\text{ms}$) for UE supporting other power class.

For Configuration 7,8,9

9.12s ($288 \cdot 20\text{ms} + 96 \cdot 20\text{ms} + 72 \cdot 20\text{ms}$) for UE supporting power class 1, or

5.76s ($180 \cdot 20\text{ms} + 60 \cdot 20\text{ms} + 48 \cdot 20\text{ms}$) for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \cdot \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.2.19 SA event triggered reporting tests for FR2-2 with SSB time index detection when DRX is used (PCell in FR1)

A.7.6.2.19.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 2 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.2.19.1-1, A.7.6.2.19.1-2, and A.7.6.2.19.1-3.

In test 1&2 per-UE measurement gap pattern configuration # 0 as defined in Table A.7.6.2.19.1-2 is provided for a UE that does not support per-FR gap and in test 3&4 measurement no gap pattern is configured as defined in Table A.7.6.2.19.1-2. If a UE supports per-FR gap, it is only required to pass test 3&4. Otherwise it is only required to pass test 1&2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A4 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.2.19.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.2.19.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR2

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
9	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.7.6.2.19.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 with SSB time index detection

Parameter	Unit	Test configuration n	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
NR RF Channel Number		Config 1,2,3,4,5,6,7,8,9	1, 2				One NR FR1 and one NR FR2 carrier frequency is used.
Active cell		Config 1,2,3,4,5,6,7,8,9	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6,7,8,9	NR cell 2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4,5,6,7,8,9	0		Gap not configured		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6,7,8,9	39		N/A		
SMTC-SSB parameters on NR RF Channel 1		Config 1,4,7	SSB.1 FR1				As specified in clause A.3.10.1
		Config 2,5,8	SSB.1 FR1				
		Config 3,6,9	SSB.2 FR1				
CSI-RS for tracking parameters on NR RF Channel 1		Config 1,4,7	TRS.1.1 FDD				
		Config 2,5,8	TRS.1.1 TDD				
		Config 3,6,9	TRS.1.2 TDD				
SMTC-SSB parameters on NR RF Channel 2		Config 1,2,3	SSB.3 FR2				As specified in clause A.3.10.2
		Config 4,5,6	SSB.11 FR2				
		Config 7,8,9	SSB.12 FR2				
offsetMO	dB	Config 1,2,3,4,5,6,7,8,9	6				

Hysteresis	dB	Config 1,2,3,4,5,6,7,8,9	0				
<i>a4-Threshold</i>	dBm	Config 1,2,3,4,5,6,7,8,9	-105				
CP length		Config 1,2,3,4,5,6,7,7,8,9	Normal				
TimeToTrigger	s	Config 1,2,3,4,5,6,7,8,9	0				
Filter coefficient		Config 1,2,3,4,5,6,7,8,9	0				L3 filtering is not used
DRX		Config 1,2,3,4,5,6,7,8,9	DRX .1	DRX .7	DRX .1	DRX .7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,4,7	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3,5,6,8,9	3μs				Synchronous cells.
T1	s	Config 1,2,3,4,5,6,7,8,9	5				
T2	s	Config 1,2,3,4,5,6,7,8,9	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table A.7.6.2.19.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2-2 with SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1,2,3,4,5,6,7,8,9	NA		Setup 1 as specified in clause A.3.15	
NR RF Channel Number		Config 1,2,3,4,5,6,7,8,9	1		2	
Duplex mode		Config 1,4,7	FDD		TDD	
		Config 2,3,5,6,8,9	TDD		TDD	
TDD configuration		Config 1,4,7	Not Applicable		TDDConf.3.1	
		Config 2,5,8	TDDConf.1.1		TDDConf.3.1	
		Config 3,6,9	TDDConf.2.1		TDDConf.3.1	
BW _{channel}	MHz	Config 1	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 2	10: N _{RB,c} = 52		100: N _{RB,c} = 66	
		Config 3	40: N _{RB,c} = 106		100: N _{RB,c} = 66	

		Config 4	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 66$
		Config 5	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 66$
		Config 6	40: $N_{RB,c} = 106$	400: $N_{RB,c} = 66$
		Config 7	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 33$
		Config 8	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 33$
		Config 9	40: $N_{RB,c} = 106$	400: $N_{RB,c} = 33$
		Config 1	52	66
		Config 2	52	66
		Config 3	106	66
		Config 4	52	66
Data RBs allocated		Config 5	52	66
		Config 6	106	66
		Config 7	52	33
		Config 8	52	33
		Config 9	106	33
BWP BW	MHz	Config 1	10: $N_{RB,c} = 52$	100: $N_{RB,c} = 66$
		Config 2	10: $N_{RB,c} = 52$	100: $N_{RB,c} = 66$
		Config 3	40: $N_{RB,c} = 106$	100: $N_{RB,c} = 66$
		Config 4	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 66$
		Config 5	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 66$
		Config 6	40: $N_{RB,c} = 106$	400: $N_{RB,c} = 66$
		Config 7	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 33$
		Config 8	10: $N_{RB,c} = 52$	400: $N_{RB,c} = 33$
		Config 9	40: $N_{RB,c} = 106$	400: $N_{RB,c} = 33$
BWP configuration	Initial DL BWP	Config 1,2,3,4,5,6,7,8,9	DLBWP.0.1	N/A
	Initial UL BWP		ULBWP.0.1	N/A
	Dedicated DL BWP		DLBWP.1.1	N/A
	Dedicated UL BWP		ULBWP.1.1	N/A
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6,7,8,9	OP.1	OP.1
PDSCH Reference measurement channel		Config 1,4,7	SR.1.1 FDD	-
		Config 2,5,8	SR.1.1 TDD	
		Config 3,6,9	SR.2.1 TDD	
RMSI CORESET Reference Channel		Config 1,4,7	CR.1.1 FDD	-
		Config 2,5,8	CR.1.1 TDD	
		Config 3,6,9	CR.2.1 TDD	
Dedicated CORESET RMC configuration		Config 1,4,7	CCR.1.1 FDD	-
		Config 2,5,8	CCR.1.1 TDD	
		Config 3,6,9	CCR.2.1 TDD	
SMTC configuration defined in A.3.11.1 and A.3.11.2		Config 1,4,7	SMTC.2	SMTC.2
		Config 2,3,5,6,8,9	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5,7,8	15	120
		Config 3,6,9	30	120

EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6,7, 8,9	0	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} ^{Note2}	dBm/15 kHz Note5		NA Link only, see clause A.3.7A	-104.7	
N_{oc} ^{Note2}	dBm/S CS Note4	Config 1,2,3		-95.7	
		Config 4,5,6		-89.7	
		Config 7,8,9		-86.7	
SSB_RP ^{Note 3}	dBm/S CS Note5	Config 1,2,3		-Infinity	-86.7
		Config 4,5,6		-Infinity	-80.7
		Config 7,8,9		-Infinity	-77.7
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6,7, 8,9		-Infinity	9
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6,7, 8,9		-Infinity	9
I_o ^{Note3}	dBm/95 .04 MHz Note5	Config 1,2,3,4,5,6,7, 8,9		-66.7	-57.2
Propagation Condition		Config 1,2,3,4,5,6,7, 8,9	AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: SSB_RP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone					

A.7.6.2.19.2 Test Requirements

In test 1 with per-UE gap and in test 3 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than $X1$ ms from the beginning of time period T2, where $X1$ is

For Configuration 1,2,3

15.84s ($96 \cdot 40\text{ms} \cdot 1.5 + 96 \cdot 40\text{ms} \cdot 1.5 + 72 \cdot 40\text{ms} \cdot 1.5$) for UE supporting power class 1, or

10.08s ($60 \cdot 40\text{ms} \cdot 1.5 + 60 \cdot 40\text{ms} \cdot 1.5 + 48 \cdot 40\text{ms} \cdot 1.5$) for UE supporting other power class.

For Configuration 4,5,6

21.6s ($192 \cdot 40\text{ms} \cdot 1.5 + 96 \cdot 40\text{ms} \cdot 1.5 + 72 \cdot 40\text{ms} \cdot 1.5$) for UE supporting power class 1, or

13.68s ($120 \cdot 40\text{ms} \cdot 1.5 + 60 \cdot 40\text{ms} \cdot 1.5 + 48 \cdot 40\text{ms} \cdot 1.5$) for UE supporting other power class.

For Configuration 7,8,9

27.36s ($288 \cdot 40\text{ms} \cdot 1.5 + 96 \cdot 40\text{ms} \cdot 1.5 + 72 \cdot 40\text{ms} \cdot 1.5$) for UE supporting power class 1, or

17.28s ($180 \cdot 40\text{ms} \cdot 1.5 + 60 \cdot 40\text{ms} \cdot 1.5 + 48 \cdot 40\text{ms} \cdot 1.5$) for UE supporting other power class.

In test 2 with per-UE gap and in test 4 without the gap, the UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than $X2$ ms from the beginning of time period T2, where $X2$ is

For Configuration 1,2,3

168.69s ($96 \cdot 640\text{ms} + 96 \cdot 640\text{ms} + 72 \cdot 640\text{ms}$) for UE supporting power class 1, or

107.52s ($60 \cdot 640\text{ms} + 60 \cdot 640\text{ms} + 48 \cdot 640\text{ms}$) for UE supporting other power class.

For Configuration 4,5,6

230.4s ($192 \cdot 640\text{ms} + 96 \cdot 640\text{ms} + 72 \cdot 640\text{ms}$) for UE supporting power class 1, or

145.92s ($120 \cdot 640\text{ms} + 60 \cdot 640\text{ms} + 48 \cdot 640\text{ms}$) for UE supporting other power class.

For Configuration 7,8,9

291.84s ($288 \cdot 640\text{ms} + 96 \cdot 640\text{ms} + 72 \cdot 640\text{ms}$) for UE supporting power class 1, or

184.32s ($180 \cdot 640\text{ms} + 60 \cdot 640\text{ms} + 48 \cdot 640\text{ms}$) for UE supporting other power class.

In test 1, 2, 3 and 4 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \cdot \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.3 L1-RSRP measurement for beam reporting

A.7.6.3.1 SSB based L1-RSRP measurement when DRX is not used

A.7.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.7.6.3.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.7.6.3.1.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.7.6.3.1.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.3.1.2-1 and Table A.7.6.3.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.7.6.3.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
BW _{channel}	1~2	MHz	100: N _{RB,c} = 66
Data RBs allocated	1~4		66
PDSCH Reference measurement channel	1		SR.3.2 TDD
	2		SR.3.3 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
	2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
	2		CCR.3.7 TDD
SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1
			ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3
			ULBWP.1.3
SMTc configuration	1~2		SMTc.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		Off
reportConfigType	1~2		periodic

reportQuantity	1~2		ssb-Index-RSRP
Number of reported RS	1~2		2
L1-RSRP reporting period	1~2	slot	320
T1	1~2	s	5
T2	1~2	s	2
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.3.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam Assumption ^{Note 4}	1-2		Rough			
N_{oc} ^{Note2}	1~2	dBm/15kHz	-105			
N_{oc} ^{Note2}	1	dBm/SSB SCS	-96			
	2		-93			
$\hat{E}_s/I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB_RP ^{Note3}	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84
I_o ^{Note3}	1	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	2		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s/N_{oc}$	1~2	dB	0	0	-Infinity	9
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.6.3.1.3 Test Requirements

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 1680 for UE supporting power class 1
- 1200 for UE supporting power class 2,3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.6.3.2 SSB based L1-RSRP measurement when DRX is used

A.7.6.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.7.6.3.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.7.6.3.2.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.7.6.3.2.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.3.2.2-1 and Table A.7.6.3.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.7.6.3.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
BW _{channel}	1~2	MHz	100: N _{RB,c} = 66
Data RBs allocated	1~2		66
PDSCH Reference measurement channel	1		SR.3.2 TDD
	2		SR.3.3 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
	2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
	2		CCR.3.7 TDD

SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		DRX.3
reportConfigType	1~2		periodic
reportQuantity	1~2		ssb-Index-RSRP
Number of reported RS	1~2		2
L1-RSRP reporting period	1~2	slot	320
T1	1~2	s	5
T2	1~2	s	3
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.3.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam Assumption ^{Note 4}	1~2		Rough			
N_{oc} ^{Note2}	1~2	dBm/15kHz	-105			
N_{oc} ^{Note2}	1	dBm/SSB SCS	-96			
	2		-93			
$\hat{E}_s/I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB_RP ^{Note3}	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84
I_o ^{Note3}	1	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	2		-63.97	-63.97	-66.98	-57.47

$\hat{E}_s / N_{oc}$	1~2	dB	0	0	-Infinity	9
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.6.3.2.3 Test Requirements

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 2880 for UE supporting power class 1
- 1920 for UE supporting power class 2,3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.6.3.3 CSI-RS based L1-RSRP measurement when DRX is not used

A.7.6.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.7.6.3.3.1-1.

Table A.7.6.3.3.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

Config	Description
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations

A.7.6.3.3.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.3.3.2-1 and Table A.7.6.3.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 480ms from the beginning of the test, the DCI trigger comes in slot 1 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.7.6.3.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.7.6.3.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
BW _{channel}	1	MHz	100: N _{RB,C} = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS configuration	1		CSI-RS.3.3 TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1		SMTC.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		Off
reportConfigType	1		aperiodic
reportQuantity	1		cri-RSRP
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1		8
Propagation condition	1		AWGN
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.3.3.2-1: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1		Setup 1 according to A.3.15.1	

Beam Assumption ^{Note 4}	1		Rough	Rough
N_{oc} ^{Note1}	1	dBm/15kHz	-105	
N_{oc} ^{Note1}	1	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1	dB	0	9
CSI-RS RSRP ^{Note2}	1	dBm/SSB SCS	-95.97	-86.97
I_o ^{Note2}	1	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1	dB	0	9
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.6.3.3.3 Test Requirements

After 480ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.20.1. The reported L1-RSRP value shall include the Rx antenna gain in the range of [-10 ~ +20] dB.

For absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1, the UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.6.3.3.3-1.

For relative accuracy of CSI-RS0 compared with CSI-RS1, the UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.7.6.3.3.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
CSI-RS0	$\text{CSI-RS_RP0} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP0} + \delta + G_{\max}$
CSI-RS1	$\text{CSI-RS_RP1} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP1} + \delta + G_{\max}$
Note 1: CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the I_o used in the test Note 3: $G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class	

A.7.6.3.4 CSI-RS based L1-RSRP measurement when DRX is used

A.7.6.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.2, with the testing configurations for NR cells in Table A.7.6.3.4.1-1.

Table A.7.6.3.4.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

Config	Description
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.7.6.3.4.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.3.4.2-1 and Table A.7.6.3.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 1440ms from the beginning of the test, the DCI trigger comes in slot 1 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.7.6.3.4.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.7.6.3.4.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
BW _{channel}	1	MHz	100: N _{RB,C} = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS configuration	1		CSI-RS.3.3 TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
SMTc configuration	1		SMTc.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		DRX.3
reportConfigType	1		aperiodic
reportQuantity	1		cri-RSRP
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1		8
Propagation condition	1		AWGN
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			

EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.3.4.2-1: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1		Setup 1 according to A.3.15.1	
Beam Assumption ^{Note 4}	1		Rough	Rough
N_{oc} ^{Note1}	1	dBm/15kHz	-105	
N_{oc} ^{Note1}	1	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1	dB	0	9
CSI-RS RSRP ^{Note2}	1	dBm/SSB SCS	-95.97	-86.97
I_o ^{Note2}	1	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1	dB	0	9
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.6.3.3.3 Test Requirements

After 1440ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.20.1. The reported L1-RSRP value shall include the Rx antenna gain in the range of [-10 ~ +20] dB.

For absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1, the UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.6.3.4.3-1.

For relative accuracy of CSI-RS0 compared with CSI-RS1, the UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.7.6.3.4.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
CSI-RS0	$\text{CSI-RS_RP0} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP0} + \delta + G_{\max}$
CSI-RS1	$\text{CSI-RS_RP1} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP1} + \delta + G_{\max}$
Note 1:	CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the I_o used in the test
Note 3:	$G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.7.6.3.5 SSB based L1-RSRP measurement when DRX is used for power class 6 UE configured with *highSpeedMeasFlagFR2-r17*

A.7.6.3.5.1 Test Purpose and Environment

The purpose of this test is to verify that the power class 6 UE makes correct reporting of L1-RSRP measurement when *highSpeedMeasFlagFR2-r17* is configured. This test will partly verify the L1-RSRP measurement requirements for power class 6 UE configured with *highSpeedMeasFlagFR2-r17* in clause 9.5.4.1, with the testing configurations for NR cells in Table A.7.6.3.5.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.7.6.3.5.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test for power class 6 UE configured with *highSpeedMeasFlagFR2-r17*

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations

A.7.6.3.5.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.3.5.2-1 and Table A.7.6.3.5.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.7.6.3.5.2-1: General test parameters

Parameter	Config	Unit	Value
<i>highSpeedMeasFlagFR2-r17</i>	1~2		Set 1
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
BW _{channel}	1~2	MHz	100: N _{RB,c} = 66
Data RBs allocated	1~2		66
PDSCH Reference measurement channel	1		SR.3.2 TDD
	2		SR.3.3 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
	2		CR.3.2 TDD

Dedicated CORESET	1		CCR.3.1 TDD
Reference Channel	2		CCR.3.7 TDD
SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		DRX.3
reportConfigType	1~2		periodic
reportQuantity	1~2		ssb-Index-RSRP
Number of reported RS	1~2		2
L1-RSRP reporting period	1~2	slot	320
T1	1~2	s	5
T2	1~2	s	3
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~2		AWGN 19444Hz
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.3.5.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam Assumption ^{Note 4}	1~2		Rough			
N_{oc} ^{Note 2}	1~2	dBm/15kHz	-105			
N_{oc} ^{Note 2}	1	dBm/SSB SCS	-96			
	2		-93			
$\hat{E}_s/I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB_RP ^{Note 3}	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84

I_o ^{Note3}	1	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	2		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	0	-Infinity	9
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.6.3.5.3 Test Requirements

The UE shall send L1-RSRP report every 320 slots. No later than 480 ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -5 to [+44] dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.6.3.6 Inter-cell SSB based L1-RSRP measurements on FR2 SCell when DRX is not used

A.7.6.3.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.13.4.1, with the testing configurations for NR serving cell in Table A.7.6.3.6.1-1.

The AoA setup of FR2 cell for this test is Setup 3 as defined in clause A.3.15.

Table A.7.6.3.6.1-1: Applicable NR configurations for inter-cell SSB based L1-RSRP test in FR2

Config	Description
1	NR PCell 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR PCell 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
3	NR PCell 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
4	NR PCell 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR SCell 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
5	NR PCell 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR SCell 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
6	NR PCell 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR SCell 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.7.6.3.6.2 Test parameters

There are two cells in the test, Cell 1 is the serving cell in CA, including a FR1 PCC and FR2 SCC. Cell 2 is a FR2 cell with different PCI from Cell 1. The test parameters for Cell 1 are given in Table A.7.6.3.6.2-1. The test parameters for FR2 Cell (Cell 2) are given in Table A.7.6.3.6.2-2 and Table A.7.6.3.6.2-3.

SSB#0 and SSB#1 is transmitted on Cell 1 FR2 SCC and Cell 2. In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on SSB#0, and report measurement results periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. At the beginning of T2, SSB#1 starts transmission and the UE is configured for L1-RSRP measurement on SSB#1. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured in CSI-ReportConfig and *additionalPCList* configured in CSI-SSB-ResourceSet.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD on Cell 1 in FR1 and perform L1-RSRP measurements on the SSB#0 in FR2.

Table A.7.6.3.6.2-1: Cell specific test parameters for FR1 PCell

Parameter	Config	Unit	Value
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2,5		10: N _{RB,c} = 52
	3,6		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2,5		SSB.3 FR1
	3,6		SSB.4 FR1
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~6		SMTC.1
CSI-RS for tracking	1,4		TRS.1.1 FDD
	2,5		TRS.1.1 TDD
	3,6		TRS.1.2 TDD
DRX configuration	1~6		Off
SSB index assigned as RLM RS	1~6		0,1
SSB Index assigned as BFD RS (q ₀)	1~6		0
SSB Index assigned as CBD RS (q ₁)	1~6		1
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			

EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
N_{oc} ^{Note2}	1~6	dBm/15 kHz	-104
$\hat{E}_s / I_{ot}$	1~6	dB	17
$\hat{E}_s / N_{oc}$	1~6	dB	17
SS-RSRP ^{Note3}	1~6	dBm/15 kHz	-87
I_o ^{Note3}	1,2,4,5	dBm/9.36MHz	-58.96
	3,6	dBm/38.16MHz	-52.86
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modeled as AWGN of appropriate power for N_{oc} to be fulfilled within $BW_{occupied}$.			
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.7.6.3.6.2-2: Cell specific test parameters for FR2 SCell

Parameter	Config	Unit	Value
SSB GSCN	1~6		Freq2
Duplex mode	1~6		TDD
TDD Configuration	1~2		TDDConf.3.1
BW _{channel}	1~6	MHz	100: $N_{RB,c} = 66$
Data RBs allocated	1~6		66
PDSCH Reference measurement channel	1,2,3		SR.3.2 TDD
	4,5,6		SR.3.3 TDD
RMSI CORESET Reference Channel	1,2,3		CR.3.1 TDD
	4,5,6		CR.3.2 TDD
Dedicated CORESET Reference Channel	1,2,3		CCR.3.1 TDD
	4,5,6		CCR.3.7 TDD
SSB configuration	1,2,3		SSB.1 FR2
	4,5,6		SSB.2 FR2
OCNG Patterns	1~6		OP.1
Initial BWP Configuration	1~6		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~6		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~6		SMTC.1
TRS Configuration	1~6		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~6		TCI.State.2
DRX configuration	1~6		Off
reportConfigType	1~6		periodic

reportQuantity	1~6		ssb-Index-RSRP
Number of reported RS	1~6		2
SSB index associated to serving PCI	1~6		0
SSB index associated to a PCI different from serving cell	1~6		1
Timing offset between two SSBs associated to different PCI	1~6		<CP
L1-RSRP reporting period	1~6	slot	320
T1	1~6	s	5
T2	1~6	s	2
EPRE ratio of PSS to SSS	1~6	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~6		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.3.6.2-2: SSB specific test parameters for FR2 SCell

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration	1~6		Setup 3 according to A.3.15.3			
			AoA1		AoA2	
Beam Assumption ^{Note 4}	1~6		Rough		Rough	
N_{oc} ^{Note2}	1~6	dBm/15kHz	-105		-105	
N_{oc} ^{Note2}	1~3	dBm/SSB SCS	-96		-96	
	4~6		-93		-93	
$\hat{E}_s/I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB_RP ^{Note3}	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84
I_o ^{Note3}	1	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	2		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s/N_{oc}$	1~2	dB	0	0	-Infinity	9
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						

- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
- Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.6.3.6.3 Test Requirements

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 2160 for UE supporting power class 1
- 1680 for UE supporting power class 2, 3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.6.3.7 SSB based L1-RSRP measurement for FR2-2 when DRX is used

A.7.6.3.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4.1, with the testing configurations for NR cells in Table A.7.6.3.7.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.7.6.3.7.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	NR 960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.7.6.3.7.2 Test parameters

There is one cells in the test, the FR2-2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.3.7.2-1 and Table A.7.6.3.7.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.7.6.3.7.2-1: General test parameters

Parameter	Config	Unit	Value
-----------	--------	------	-------

SSB GSCN	1~3		freq1
Duplex mode	1~3		TDD
TDD Configuration	1~3		TDDConf.3.1
BW _{channel}	1	MHz	100: N _{RB,c} = 66
	2		400: N _{RB,c} = 66
	3		400: N _{RB,c} = 33
Data RBs allocated	1		66
	2		66
	3		33
PDSCH Reference measurement channel	1		SR.3.2 TDD
	2		TBD
	3		TBD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
	2		TBD
	3		TBD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
	2		TBD
	3		TBD
SSB configuration	1		SSB.1 FR2
	2		TBD
	3		TBD
OCNG Patterns	1~3		OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~3		SMTC.1
TRS Configuration	1~3		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~3		TCI.State.2
DRX configuration	1~3		DRX.3
reportConfigType	1~3		periodic
reportQuantity	1~3		ssb-Index-RSRP
Number of reported RS	1~3		2
L1-RSRP reporting period	1	slot	TBD
	2		TBD
	3		TBD
T1	1~3	s	5
T2	1~3	s	3
EPRE ratio of PSS to SSS	1~3	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.3.7.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam Assumption ^{Note 4}	1-2		Rough			
N_{oc} ^{Note2}	1~2	dBm/15kHz	-105			
N_{oc} ^{Note2}	1	dBm/SSB SCS	-96			
	2		-93			
$\hat{E}_s / I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB_RP ^{Note3}	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84
Io ^{Note3}	1	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	2		-63.97	-63.97	-66.98	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	0	-Infinity	9
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.6.3.7.3 Test Requirements

The UE shall send L1-RSRP report every TBD slots. No later than X ms plus TBD slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- TBD for UE supporting power class 1
- TBD for UE supporting power class 2,3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.6.4 CLI measurements

A.7.6.4.1 SRS-RSRP measurement with non-DRX

A.7.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of SRS-RSRP measurement. This test will verify the SRS-RSRP measurement requirements in clause 9.7.2.5 with the testing configurations for NR cells in Table A.7.6.4.1.1-1.

Table A.7.6.4.1.1-1: Applicable NR configurations for FR2 SRS-RSRP test

Configuration	Description
1	NR 120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode

A.7.6.4.1.2 Test Parameters

One cell is deployed in the test, which is FR2 PCell (Cell 1). The test parameters for PCell is given in Table A.7.6.4.1.2-1 ~ A.7.6.4.1.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system transmits SRS resource for measurement in the DL slot according to the SRS configuration in Table A.7.6.4.1.2-4 and the test parameters for the (virtual) neighbour cell UE in Table A. 7.6.4.1.2-3. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 2 data symbols before SRS to be transmitted.

Table A.7.6.4.1.2-1: General test parameters for SRS-RSRP event triggered reporting for PCell in FR2

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	
RF Channel Number		1	1: Cell 1	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC.1	
SRS configuration		1	SRSCnf.1	Table A.7.6.4.1.2-4
CP length		1	Normal	
i1-Threshold	dBm	1	-103	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX	ms	1	OFF	Non-DRX
Time offset between DL from serving cell and SRS from test system	μs	1	10.67	
T1	s	1	5	
T2	s	1	1	

Table A.7.6.4.1.2-2: NR Cell specific test parameters for SA SRS-RSRP event triggered reporting for PCell in FR2

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns		1	OP.1	
TRS configuration			TRS.2.1. TDD	
PDSCH/PDCCH TCI state		1	TCI.State.2	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1	

Active UL BWP configuration		1	ULBWP.1.1
Propagation Condition		1	AWGN

Table A.7.6.4.1.2-3: NR OTA Cell specific test parameters for SA SRS-RSRP event triggered reporting for PCell and neighbour cell UE in FR2

Parameter	Unit	Test configuration	Cell 1		Neighbour cell UE	
			T1	T2	T1	T2
AoA setup		1	Setup 1 defined in A.3.15.1			
Beam assumption Note 4		1	Fine			
N_{oc} Note 2	dBm/15 kHz	1	-98		-98	
N_{oc} Note 2	dBm/SCS	1	-89		-89	
$\hat{E}_s / I_{ot}$	dB	1	-	-	-infinity	4
$\hat{E}_s / N_{oc}$	dB	1	4	4	-infinity	4
SRS-RSRP Note 3	dBm/SCS kHz	1	-	-	-infinity	-94
I_o	dBm/95.04 MHz	1	-61.36	-55.91	-70.01	-68.82
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SRS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation. Note 5: Cell 2 doesn't transmit during the SRS and the 2 previous symbols. E_s/N_{oc} is not applied to those symbols.						

Table A.7.6.4.1.2-4: SRS configuration for measurement reporting

	Field	SRSCConf.1	Comments
SRS-ResourceSet	srs-ResourceSetId	0	
	srs-ResourceIdList	0	
	resourceType	Periodic	
	Usage	Codebook	
SRS-Resource	SRS-ResourceId	0	
	nrofSRS-Ports	Port1	
	transmissionComb	n2	
	combOffset-n2	0	
	cyclicShift-n2	0	
	resourceMapping startPosition	0	
	resourceMapping nrofSymbols	n1	
	resourceMapping repetitionFactor	n1	
	freqDomainPosition	0	
	freqDomainShift	0	
	freqHopping c-SRS	12	
	freqHopping	0	

b-SRS		
freqHopping	0	
b-hop		
groupOrSequenceHopping	Neither	
resourceType	Periodic	
periodicityAndOffset	sl40, 25	
sequenceId	0	Any 10 bit number

A.7.6.4.1.3 Test Requirements

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 60 ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.4.2 CLI-RSSI measurement with non-DRX

A.7.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of CLI-RSSI measurement. This test will verify the CLI-RSSI measurement requirements in clause 9.7.3.5 with the testing configurations for NR cells in Table A.7.6.4.2.1-1.

Table A.7.6.4.2.1-1: Applicable NR configurations for FR2 CLI-RSSI test

Configuration	Description
1	NR 120 kHz SCS, 100 MHz bandwidth, TDD duplex mode

A.7.6.4.2.2 Test Parameters

One cell is deployed in the test, which is FR2 PCell (Cell 1). The test parameters for PCell is given in Table A.7.6.4.2.2-1 ~ A.7.6.4.2.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event I1 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively.

During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI measurement resource and on 2 data symbols before. The CLI-RSSI measurement resource configuration is in Table A.7.6.4.2.2-4.

Table A.7.6.4.2.2-1: General test parameters for CLI-RSSI event triggered reporting for PCell in FR2

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	NR Cell 1	
RF Channel Number		1	1: Cell 1	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC.1	
CLI-RSSI configuration		1	CLI-RSSIConf.1	Table A.7.6.4.2.2-4
CP length		1	Normal	
i1-Threshold	dBm	1	-94.5	
Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used

DRX		1	OFF	Non-DRX
Time offset between DL from serving cell and OCNG from test system	μ s	1	10.67	
T1	s	1	5	
T2	s	1	1	

Table A.7.6.4.2.2-2: NR Cell specific test parameters for CLI-RSSI event triggered reporting for PCell in FR2

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
PUSCH parameters		1	N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns ^{Note 1}		1	OP.1	
TRS configuration			TRS.2.1. TDD	
PDSCH/PDCCH TCI state		1	TCI.State.2	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1	
Propagation Condition		1	AWGN	
Note 1: OCNG is not transmitted in the CLI-RSSI measurement resources.				

Table A.7.6.4.2.2-3: NR OTA Cell specific test parameters for CLI-RSSI event triggered reporting for PCell in FR2

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
AoA setup		1	Setup 1 defined in A.3.15.1	
Beam assumption ^{Note 3}		1	Fine	Fine
N_{oc} on CLI-RSSI measurement resource ^{Note 2}	dBm/15 kHz	1	-119	-108
N_{oc} on CLI-RSSI measurement resource ^{Note 2}	dBm/SCS	1	-110	-99
Io on CLI-RSSI measurement resource	dBm/95.04 MHz	1	-81.01	-70.01
Io on CLI-RSSI measurement resource	dBm/1.08 MHz	1	-100.46	-89.46
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.				

Table A.7.6.4.2.2-4: CLI-RSSI measurement resource configuration for measurement reporting

	Field	CLI-RSSIConf.1
RSSI-Resource	rsi-ResourceId	0
	rsi-SCS	120
	startPRB	0
	nrofPRBs	66
	startPosition	3
	nrofSymbols	11
	rsi-PeriodicityAndOffset	sl40, 25

A.7.6.4.2.3 Test Requirements

The UE shall send one Event I1 triggered measurement report, with a measurement reporting delay less than 5ms from the beginning of time period T2. The nominal RSSI used to evaluate the requirement shall be based on I_o .

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.5 NR Measurements with autonomous gaps

A.7.6.5.1 SA interfrequency CGI reporting in autonomous gaps test (PCell in FR2)

A.7.6.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an CGI. This test will partly verify the SA inter-frequency NR cell search requirements in clause 8.2.1.2.16 and 9.11

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.5.1.1-1, A.7.6.5.1.1-2, and A.7.6.5.1.1-3.

Measurement gap patterns are configured. During T1 the UE shall report event A3 for cell 2. Within 3 seconds of the event report, the test equipment shall add a measurement reporting configuration using *ReportConfigNR* which contains a *ReportCGI* IE with *cellForWhichToReportCGI* set to the physical Cell ID of cell 2 and including the optional IE *useAutonomousGaps-r16*

In the measurement control information, it is indicated to the UE to decode the CGI of the neighbour cell using autonomous gaps. The test consists of two time phases, T1 and T2. Time period T2 begins when the last TTI containing the RRC message implying SI reading is sent to the UE.

Supported test configurations are shown in table A.7.6.5.1.1-1.

Table A.7.6.5.1.1-1 SA interfrequency CGI reporting test in autonomous gaps

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.5.1.1-2: General test parameters for SA interfrequency CGI reporting in autonomous gaps

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (PCell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
SI-RNTI scheduling rate	ms		20 ms	S-RNTI scheduled on 8 occasions per 160ms transmission period
A3-Offset	dB	Config 1	-15	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3µs	Synchronous cells.
T1	s	Config 1	<10	UE expected to report event A3 for cell 2 within 5,2s (PC1) or 3.5s (other PC) of the start of T1. Test equipment shall configure CGI reporting within 3s after receiving the event A3 report. T2 begins 10ms after test equipment has transmitted the RRC reconfiguration to configure CGI reporting.
T2	s	Config 1	1	

Table A.7.6.5.1.1-3: Cell specific test parameters SA interfrequency CGI reporting in autonomous gaps

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1	Setup 3 as specified in clause A.3.15			
			AoA1		AoA2	
Beam Assumption ^{Note 7}		Config 1	Rough			

NR RF Channel Number			Config 1	1	2
Duplex mode			Config 1	TDD	TDD
TDD configuration			Config 1	TDDConf.3.1	TDDConf.3.1
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66	100: N _{RB,c} = 66
BWP BW		MHz	Config 1	100: N _{RB,c} = 66	100: N _{RB,c} = 66
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1	N/A
	Initial UL BWP			ULBWP.0.1	N/A
	Dedicated DL BWP			DLBWP.1.1	N/A
	Dedicated UL BWP			ULBWP.1.1	N/A
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1	Not sent
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD	-
CORESET Reference Channel			Config 1	CR.3.1 TDD	-
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120	120
TRS configuration			Config 1	TRS.2.1 TDD	N/A
TCI configuration			Config 1	CSI-RS.Config.0	N/A
EPRE ratio of PSS to SSS			Config 1	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc}^{Note2}	dBm/15 kHz Note5			-99.03	-99.03
N_{oc}^{Note2}	dBm/S CS Note4		Config 1	-90	-90
SS-RSRP ^{Note 3}	dBm/S CS Note5		Config 1	-87	-93
$\hat{E}_s/I_{ot}$	dB		Config 1	3	-3
$\hat{E}_s/N_{oc}$	dB		Config 1	3	-3

I_o^{Note3}	dBm/95 .04 MHz Note5	Config 1	-56.25	-59.25
Propagation Condition		Config 1	AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone			
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone			
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			

A.7.6.5.1.2 Test Requirements

The UE shall report the CGI of cell 2 within $10 + 25 \cdot T_{\text{smtc}} + 6 \cdot T_{\text{RMSI-scheduling}} + 20\text{ms} + 2\text{ms} = 652\text{ ms}$ from the start of T2, allow 655 ms. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall be scheduled continuously throughout the test, and from the start of T3 until 655 ms the number of interrupted slots shall not exceed the allowed number as defined in clause 8.2.2.2.14.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \cdot T_{\text{TTI}_{\text{DCCH}}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.6 L1-SINR measurement for beam reporting

A.7.6.6.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR configured when DRX is not used

A.7.6.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements in clause 9.8.4.1, with the testing configurations for NR cells in Table A.7.6.6.1.1-1.

Table A.7.6.6.1.1-1: Applicable NR configurations for FR2 CSI-RS based L1-SINR test

Config	Description
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations

A.7.6.6.1.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.6.1.2-1 and Table A.7.6.6.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources. After 160ms from the beginning of the test, the DCI trigger comes in slot 8 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.7.6.6.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.7.6.6.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
BW _{channel}	1	MHz	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS configuration	1		CSI-RS.3.3 TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3
SMTc configuration	1		SMTc.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		Off
reportConfigType	1		aperiodic
reportQuantity	1		cri-SINR
reportQuantity-r16	1		cri-SINR-r16
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1		26
Propagation condition	1		AWGN
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.6.1.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1		Setup 1 according to A.3.15.1	
Beam assumption ^{Note 3}	1		Rough	
N_{oc} ^{Note1}	1	dBm/15kHz	-105	
N_{oc} ^{Note1}	1	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1	dB	0	9
CSI-RS RSRP ^{Note3}	1	dBm/SSB SCS	-95.97	-86.97
I_o ^{Note2}	1	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1	dB	0	9
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.6.6.1.3 Test Requirements

After 160ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.28.1.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.6.2 L1-SINR measurement with SSB based CMR and dedicated IMR when DRX is used

A.7.6.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements in clause 9.8.4.2, with the testing configurations for NR cells in Table A.7.6.6.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.7.6.6.2.1-1: Applicable NR configurations for FR2 L1-SINR measurement test with SSB based CMR and CSI-IM based IMR

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Note:	The UE is only required to be tested in one of the supported test configurations
-------	--

A.7.6.6.2.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.6.2.2-1 and Table A.7.6.6.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the SSBs and the associated CSI-IM resources, and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD measurements based on the SSBs, and UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-IM resources as IMR.

Table A.7.6.6.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
BW _{channel}	1~2	MHz	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
CSI-IM configuration	1~2		CSI-IM.3.1 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTC configuration	1~2		SMTC.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		DRX.3
reportConfigType	1~2		periodic
reportQuantity-r16	1~2		ssb-Index-SINR-r16
Number of reported RS	1~2		2
L1-SINR reporting period	1~2	slot	640
T1	1~2	s	5
T2	1~2	s	2
Propagation condition	1~2		AWGN
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			

EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.6.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam assumption ^{Note 4}	1~2		Rough			
N_{oc} ^{Note2}	1~2	dBm/15kHz	-105			
N_{oc} ^{Note2}	1	dBm/SSB SCS	-96			
	2		-93			
$\hat{E}_s/I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB RSRP ^{Note3}	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84
I_o ^{Note3}	1	dBm/95.04MHz	-64	-64	-67	-57.5
	2		-64	-64	-67	-57.5
$\hat{E}_s/N_{oc}$	1~2	dB	0	0	-Infinity	9
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SSB RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.6.6.2.3 Test Requirements

The UE shall send L1-SINR report every 640 slots. No later than X ms plus 640 slots from the beginning of time period T2, UE shall send L1-SINR report including the results for both SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1 while meeting the accuracy requirements defined in clause 10.1.28.2, where X is

- 2880 for UE supporting power class 1
- 1920 for UE supporting power class 2,3 or 4.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.6.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR configured when DRX is used

A.7.6.6.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-SINR measurement. This test will partly verify the L1-SINR measurement requirements with CSI-RS based CMR and dedicated IMR configured in clause 9.8.4.3, with the testing configurations for NR cells in Table A.7.6.6.3.1-1.

Table A.7.6.6.3.1-1: Applicable NR configurations for FR2 L1-SINR test with CMR and dedicated IMR

Config	Description
1	LTE FDD, NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.7.6.6.3.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.6.6.3.2-1 and Table A.7.6.6.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-SINR measurement on the configured CSI-RS as CMR and an associated CSI-RS as IMR, and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-SINR on aperiodic CSI-RS resources and the associated IMR. UE is also configured to measure L1-SINR based on SSB. After 1440ms from the beginning of the test, the DCI trigger comes in slot 8 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.7.6.6.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs, and UE is configured to perform L1-SINR measurement based on the CSI-RS as CMR and the CSI-RS as IMR.

Table A.7.6.6.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
BW _{channel}	1	MHz	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS as CMR configuration	1		CSI-RS.3.3 TDD
CSI-RS as IMR configuration	1		CSI-RS.3.2A TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3
SMTc configuration	1		SMTc.1
TRS Configuration	1		TRS.2.1 TDD

PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		DRX.3
reportConfigType	1		aperiodic
reportQuantity-r16	1		cri-SINR-r16
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1		26
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.7.6.6.3.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1~2		Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 3}	1~2		Rough	
N_{oc} ^{Note1}	1~2	dBm/15kHz	-105	
N_{oc} ^{Note1}	1~2	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1~2	dB	0	9
CSI-RS RSRP ^{Note2}	1~2	dBm/SSB SCS	-95.97	-86.97
I_o ^{Note2}	1~2	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1~2	dB	0	9
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.6.6.3.3 Test Requirements

After 1440ms from the beginning of the test, the UE shall send L1-SINR report at slot 26 from the reception of DCI triggering the L1-SINR measurement. The L1-SINR report shall include the results for both CSI-RS#0 as CMR + CSI-RS#0 as IMR and CSI-RS#1 as CMR + CSI-RS#1 as IMR while meeting the accuracy requirement in clause 10.1.28.3. The reported L1-SINR value shall consider the Rx antenna gain in the range of [-10 ~ +20] dB when calculated.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.7 CSI-RS based intra-frequency Measurements

A.7.6.7.1 SA event triggered reporting test without gap under DRX for CSI-RS based intra-frequency measurement

A.7.6.7.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency measurement requirements in clause 9.10.2 and 9.10.3. Supported test configurations are shown in table A.7.6.7.1.1-1.

Table A.7.6.7.1.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB and CSI-RS SCS, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.7.1.1-2 ~ 6.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.7.6.7.1.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Value	Comment
			Test 1	
Active cell		1	PCell (Cell 1)	
Neighbour cell		1	Cell 2	Cell to be identified.
RF Channel Number		1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
CSI-RS resource configuration		1	CSI-RS.RRM.FR2.1 TDD	
A3-Offset	dB	1	-6	
CP length		1	Normal	

Hysteresis	dB	1	0	
Time To Trigger	s	1	0	
Filter coefficient		1	0	L3 filtering is not used
DRX		1	DRX.1	DRX related parameters are defined in Table A.3.3
Time offset between Cell 1 and Cell 2	μs	1	0.58	The timing of Cell 2 is CP later than the timing of Cell 1.
T1	s	1	5	
T2	s	1	10	

Table A.7.6.7.1.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Intial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1	SSB		SSB	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
TRS configuration		1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1	TCI.State.2		N/A	
OCNG Patterns		1	OP.1		OP.1	
SMTC		1	SMTC.1			
SSB		1	SSB.3 FR2		SSB.3 FR2	
CSI-RS		1	CSI-RS.RRM.FR2.1 TDD		CSI-RS.RRM.FR2.1 TDD except Associated SSB index = 1, slotConfig = ms20 (slot 2)	
Propagation Condition		1	AWGN			

Table A.7.6.7.1.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 defined in A.3.15.1			
Beam assumption ^{Note 4}		1	Fine		Fine	
$\hat{E}_s / I_{ot}$ for SSB	dB	1	4	-1.46	-Infinity	-1.46

$\hat{E}_s/I_{ot}$ for CSI-RS	dB	1	4	-1.46	-Infinity	-1.46
N_{oc} Note 2	dBm/15 KHz	1	-98			
N_{oc} Note 2	dBm/SCS	1	-86			
CSI-RSRP	dBm/SCS	1	-82	-82	-Infinity	-82
SS-RSRP	dBm/SCS	1	-82	-82	-Infinity	-82
$\hat{E}_s/N_{oc}$ for SSB	dB	1	4	4	-Infinity	4
$\hat{E}_s/N_{oc}$ for CSI-RS	dB	1	4	4	-Infinity	4
I_o	dBm/95.04MHz	1	-54.53	-52.18	-54.53	-52.18
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1, and does not limit UE implementation or test system implementation.						

A.7.6.7.1.2 Test Requirements

In this test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

- 9.6s for a UE supporting power class 1,
- 5.76s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.8 CSI-RS based inter-frequency Measurements

A.7.6.8.1 SA event triggered reporting tests for FR2 CSI-RS based measurement when non-DRX is used (PCell in FR2)

A.7.6.8.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event for CSI-RS based L3 measurement. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.10.3.5.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.8.1.1-1, A.7.6.8.1.1-2, and A.7.6.8.1.1-3.

In test measurement gap pattern configuration # 13 as defined in Table A.7.6.8.1.1-2 is provided for UE.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.8.1.1-1.

Table A.7.6.8.1.1-1: SA event triggered reporting tests for CSI-RS based L3 measurement for FR2-FR2

Config	Description
1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.8.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 CSI-RS based L3 measurement

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
SMTC configuration		Config 1	SMTC.1	As specified in clause A.3.11
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells	μs	Config 1	0.58	The timing of Cell 2 is CP later than the timing of Cell 1.
T1	s	Config 1	5	
T2	s	Config 1	11 for PC1; 7 for other PC	

Table A.7.6.8.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 CSI-RS based L3 measurement

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
BW_{channel}		MHz	Config 1	100: $N_{RB,c} = 66$		100: $N_{RB,c} = 66$	
BWP BW		MHz	Config 1	100: $N_{RB,c} = 66$		100: $N_{RB,c} = 66$	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTTC.1		SMTTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
TCI configuration			Config 1	CSI-RS.Config.0		N/A	
CSI-RS configuration for RRM				-		CSI-RS.RRM.FR2.1 TDD	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} ^{Note2}		dBm/15 kHz Note5		-104.7		-104.7	
N_{oc} ^{Note2}		dBm/S CS Note4	Config 1	-95.7		-95.7	

CSI-RSRP ^{Note 3}	dBm/S CS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
SS-RSRP ^{Note 3}	dBm/S CS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s/I_{ot}$ for SSB	dB	Config 1	6	6	-Infinity	9
$\hat{E}_s/I_{ot}$ for CSI-RS	dB	Config 1	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$ for SSB	dB	Config 1	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$ for CSI-RS	dB	Config 1	6	6	-Infinity	9
I_o ^{Note3}	dBm/95 .04 MHz Note5	Config 1	-59.7	-59.7	-66.7	-57.2
Propagation Condition		Config 1	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: CSI-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.						

A.7.6.8.1.2 Test Requirements

In the test the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

10880 for UE supporting power class 1, or

6720 for UE supporting other power class

The UE is required to read the SSB index indicated by associatedSSB in the neighbour cell in this test

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.9 RSTD measurements

A.7.6.9.1 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR2 SA

A.7.6.9.1.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 9.9.2 in an environment with AWGN propagation conditions in FR2 in standalone scenario when single positioning frequency layer is configured.

Supported test configurations are shown in table A.7.7.1.1-1. The test parameters are as given in Table 7.6.7.1.1-2, Table A.7.6.9.1.1-3 and , Table A.7.6.9.1.1-4.

Table A.7.6.9.1.1-1: Supported test configurations for NR RSTD

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All cells are on the same RF channel distributed in single positioning frequency layers.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID # 24 or #13 before T2.

Table A.7.6.9.1.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
SSB configuration	Config 1		SSB.3 FR2	

SMTC configuration	Config 1		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
RMSI CORESET RMC configuration	Config 1		CR.3.1 TDD	As specified in clause A.3.1.2.1
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 FDD	
PRS Configuration	Config 1		PRS.1.1 FR2	As specified in clause A.3.31
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX			OFF	
Measurement gap			GP#24 or GP#13	GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured
Radio frame receive time offset between the cells at the UE antenna connector	μs		Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD	μs		Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells	μs		5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data			4	Including the reference cell
PRS muting info			Cell 1: '10' Cell 2: '01' Cell 3: '10'	Corresponds to prs-MutingInfo defined in TS 37.355 [24]
PRS resource RE offset			Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s		3	The length of the time interval from the beginning of each test
T2	s		1.28	The length of the time interval that follows immediately after time interval T1
AoA setup			Setup 1	As defined in A.3.15.1

Beam assumption		Rough	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
-----------------	--	-------	--

Table A.7.6.9.1.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positioning frequency layer			1	1	1
BW _{channel}		MHz	200: N _{RB,c} = 132	200: N _{RB,c} = 132	200: N _{RB,c} = 132
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	N/A	N/A
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} ^{Note 3}	Config 1				
$PRS \hat{E}_s / N_{oc}$		dB	-Infinity	-Infinity	-Infinity
I_0 ^{Note 4}	Config 1	dBm/95.04MHz	-57.00	-57.00	-57.00
SSB_{RP} ^{Note4}	Config 1	dBm/SCS	-89	-Infinity	-Infinity
$SSB \hat{E}_s / N_{oc}$	Config 1	dB	0	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1:	OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.
Note 2:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3:	Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4:	SSB_RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.7.6.9.1.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter	Unit	Cell 1	Cell 2	Cell 3
		T2	T2	T2
RF Channel Number		1	1	1
Positioning frequency layer		1	1	1
$BW_{channel}$	MHz	200: $N_{RB,c} = 132$	200: $N_{RB,c} = 132$	200: $N_{RB,c} = 132$
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1		OP.1	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
EPRE ratio of PRS to SSS				
PRACH configuration		FR2 PRACH configuration 1	FR2 PRACH configuration 1	FR2 PRACH configuration 1

N_{oc} Note 3	Config 1	dBm/SCS	-89	-89	-89
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-5.45	-11.67	-11.67
I_o Note4	Config 1	dBm/190.08MHz	-55.48	-55.48	-55.48
PRS $\hat{E}_s/I_{ot}$		dB	dB	-6	-13
PRP Note 4		dBm/SCS	dBm/SCS	-94.45	-100.67
Propagation Condition		AWGN			
Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.					
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 4: PRP and I_o levels have been derived from other parameters and are given for information purpose. These are not settable test parameters. The I_o is calculated based only on the symbols in which PRS is transmitted.					
Note 5: Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					

Table A.7.6.9.1.-5: Void

A.7.6.9.1.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 9.9.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.2.5 starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD_1970049.

A.7.6.9.2 NR RSTD measurement reporting delay test case for dual positioning frequency layers in FR2 SA

A.7.6.9.2.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 9.9.2 in an environment with AWGN propagation conditions in FR2 in standalone scenario when dual positioning frequency layer is configured.

Supported test configurations are shown in table A.7.6.9.2.1-1. The test parameters are as given in Table 7.6.7.2.1-2, Table A.7.6.9.2.1-3 and Table A.7.6.9.2.1-4.

Table A.7.6.9.2.1-1: Supported test configurations for NR RSTD

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All cells are on the 2 RF channels distributed in dual positioning frequency layers.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2. Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID # 24 or #13 before T2.

Table A.7.6.9.2.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first place in the respective neighbour cell list in the DL-TDOA assistance data for two positioning frequency layers.
SSB configuration	Config 1		SSB.3 FR2	
SMTC configuration	Config 1		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
RMSI CORESET RMC configuration	Config 1		CR.3.1 TDD	As specified in clause A.3.1.2.1
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 FDD	

PRS Configuration	Config 1		PRS.1.1 FR2	As specified in clause A.3.31
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX			OFF	
Measurement gap			GP#24 or GP#13	GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured
Radio frame receive time offset between the cells at the UE antenna connector	μs		Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD	μs		Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells	μs		5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data			4	Including the reference cell
PRS muting info			Cell 1: '10' Cell 2: '01' Cell 3: '10'	Corresponds to prs-MutingInfo defined in TS 37.355 [24]
PRS resource RE offset			Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s		3	The length of the time interval from the beginning of each test
T2	s		1.28	The length of the time interval that follows immediately after time interval T1
AoA setup			Setup 1	As defined in A.3.15.1
Beam assumption			Rough	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.6.9.2.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter	Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number		1	1	2
Positioning frequency layer		1	1	2
BW _{channel}	MHz	200: N _{RB,c} = 132	200: N _{RB,c} = 132	200: N _{RB,c} = 132
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1		OP.1	N/A	N/A
EPRE ratio of PBCH DMRS to SSS				

EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-89		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
I_o ^{Note 4}	Config 1	dBm/190.08MHz	-53.99	-53.99	-57.00
SSB_RP ^{Note4}	Config 1	dBm/SCS	-89	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$		dB	0	-Infinity	-Infinity
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS. Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 4: SSB_RP and I_o levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.					

Table A.7.6.9.2.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter	Unit	Cell 1	Cell 2	Cell 3
		T2	T2	T2
RF Channel Number		1	1	2
Positioning frequency layer		1	1	2
$BW_{channel}$	MHz	100: $N_{RB,c} = 66$	100: $N_{RB,c} = 66$	100: $N_{RB,c} = 66$
Correlation Matrix and Antenna Configuration		1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1		OP.1	OP.1	OP.1
EPRE ratio of PBCH DMRS to SSS	dB	0	0	0
EPRE ratio of PBCH to PBCH DMRS				

EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
EPRE ratio of PRS to SSS					
PRACH configuration			FR2 PRACH configuration 1	FR2 PRACH configuration 1	FR2 PRACH configuration 1
N_{oc} Note 3	Config 1	dBm/SCS	-89	-89	-89
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-5.7	-11.9	-13
I_o Note4	Config 1	dBm/190.08MHz	-55.75	-55.75	-56.79
PRS $\hat{E}_s/I_{ot}$		dB	-6	-13	-13
PRP Note 4		dBm/SCS kHz	-94.7	-100.9	-102
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.					
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 4: PRP and I_o levels have been derived from other parameters and are given for information purpose. These are not settable test parameters. The I_o is calculated based only on the symbols in which PRS is transmitted.					
Note 5: Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					

Table A.7.6.9.2.1-5: Void

A.7.6.9.2.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 9.9.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.2.5 starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD_1970049.

A.7.6.9.3 NR RSTD measurement reporting delay test case for single positioning frequency layer with reduced number of samples in FR2 SA

A.7.6.9.3.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 9.9.2 in an environment with AWGN propagation conditions in FR2 in standalone scenario when single positioning frequency layer is configured. In this test PRS is transmitted within the active BWP of the UE.

Supported test configurations are shown in table A.7.6.9.3.1-1. The test parameters are as given in Table 7.6.9.3.1-2, Table A.7.6.9.3.1-3 and Table A.7.6.9.3.1-4.

Table A.7.6.9.3.1-1: Supported test configurations for NR RSTD

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All cells are on the same RF channel distributed in single positioning frequency layer.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance data* and location information request. UE can support *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED*, and the LMF indicates the UE to perform positioning measurements with reduced number of samples N_{sample} via *reducedDL-PRS-ProcessingSamples*.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID # 24 or #13 before T2.

Table A.7.6.9.3.1-2: General test parameters for RSTD measurement reporting delay

Parameter	Unit	Value	Comment
-----------	------	-------	---------

Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
SSB configuration	Config 1		SSB.3 FR2	
BW_{channel}	Config 1	MHz	200: $N_{RB,c} = 132$	
SMTC configuration	Config 1		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
RMSI CORESET RMC configuration	Config 1		CR.3.1 TDD	As specified in clause A.3.1.2.1
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
PRS Configuration	Config 1		PRS.1.2 FR2	As specified in clause A.3.31
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX			OFF	
Measurement gap			GP#24 or GP#13	GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured
Radio frame receive time offset between the cells at the UE antenna connector		μs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD		μs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator

Expected RSTD uncertainty for all neighbour cells	μs	5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		4	Including the reference cell
PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'	Corresponds to prs-MutingInfo defined in TS 37.355 [24]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	s	1.28	The length of the time interval that follows immediately after time interval T1
AoA setup		Setup 1	As defined in A.3.15.1
Beam assumption		Rough	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.6.9.3.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positioning frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.5 FDD	N/A	N/A
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-89		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
I_0 ^{Note 4}	Config 1	dBm/190.08MHz	-54.00	-54.00	-54.00
SSB RP ^{Note 4}	Config 1	dBm/SCS	-89	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$		dB	0	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1:	OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3:	Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4:	SSB RP and I_o levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.7.6.9.3.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1	Cell 2	Cell 3
			T2	T2	T2
RF Channel Number			1	1	1
Positioning frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
PRACH configuration			FR2 PRACH configuration 1	FR2 PRACH configuration 1	FR2 PRACH configuration 1
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-89	-89	-89
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	1	-1.2	-1.2
Io	Config 1	dBm/190.08MHz	-51.23	-51.23	-51.23
PRS $\hat{E}_s/I_{ot}$		dB	-3	-6	-6
PRP ^{Note 4}		dBm/SCS	-88	-90.2	-90.2
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that active cells (all, except Cell 3 in T3) are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the subframes with transmitted PRS.					
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 4: PRP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters. The Io is calculated based only on the symbols in which PRS is transmitted.					
Note 5: Calculation of Es/Iot includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					

A.7.6.9.3.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 9.9.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.1.5 starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD_1970049.

A.7.6.9.4 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR2 SA without measurement gap

A.7.6.9.4.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the gapless RSTD measurement requirements specified in Clause 9.9.2.7 in an environment with AWGN propagation conditions in FR2 in standalone scenario when single positioning frequency layer is configured. Reporting delay test for gapless PRS measurement is conducted assuming that the PRS has higher priority, i.e., state 1, than all other DL signals/channels and is transmitted within active DL BWP of UE. Two sub-tests are defined, sub-test 1 is for $N_{\text{sample}} = 4$ and sub-test 2 is for $N_{\text{sample}} = 1$. For sub-test 2 LMF indicates UE to perform PRS measurement with reduced number of samples N_{sample} via *reducedDL-PRS-ProcessingSamples*.

Supported test configurations are shown in table A.7.6.9.4.1-1. The test parameters are as given in Table A.7.6.9.4.1-2, Table A.7.6.9.4.1-3, and Table A.7.6.9.4.1-4.

Table A.7.6.9.4.1-1: Supported test configurations for NR RSTD

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All cells are on the same RF channel distributed in single positioning frequency layers.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance data* and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first PRS processing window instance containing the PRS resources.

The UE is configured with PPW before T2.

Table A.7.6.9.4.1-2: General test parameters for RSTD measurement reporting delay

Parameter	Unit	Value	Comment
-----------	------	-------	---------

Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
BW _{channel}	Config 1	MHz	200: N _{RB,C} = 132	
SSB configuration	Config 1		SSB.3 FR2	
SMTC configuration	Config 1		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
RMSI CORESET RMC configuration	Config 1		CR.3.1 TDD	As specified in clause A.3.1.2.1
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
PRS Configuration	Config 1		PRS.1.4. FR2	As specified in clause A.3.31
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX			OFF	
PPW configuration			Table A.3. 33-1: Reference PPW configuration	As defined in A.3.33
Time offset between serving and neighbour cells		μs	set to the UE reported capability for receive time difference threshold if the UE reported value is < 3μs 3μs otherwise	PRS are transmitted from synchronous cells
Expected RSTD		μs	0	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells		μs	Same as time offset between serving and neighbour cells	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the

			expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		4	Including the reference cell
PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'	Corresponds to prs-MutingInfo defined in TS 37.355 [24]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	ms	10	The length of the time interval that follows after time interval T1 and processing time of assistance data. In this test UE is configured to measure single PFL within the configured PPW.
AoA setup		Setup 1	As defined in A.3.15.1
Beam assumption		Rough	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.6.9.4.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positioning frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.5 FDD	N/A	N/A
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-89		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
I_o ^{Note 4}	Config 1	dBm/190.08MHz	-54.00	-54.00	-54.00
SSB RP ^{Note 4}	Config 1	dBm/SCS	-89	-Infinity	-Infinity
SSB $\hat{E}_s/N_{oc}$		dB	0	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1:	OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3:	Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4:	SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.7.6.9.4.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1		Cell 2		Cell 3	
			Sub-test 1	Sub-test 2	Sub-test 1	Sub-test 2	Sub-test 1	Sub-test 2
RF Channel Number			1		1		1	
Positioning frequency layer			1		1		1	
Correlation Matrix and Antenna Configuration			1x2 Low		1x2 Low		1x2 Low	
OCNG patterns defined in A.3.2.1			OP.1		OP.1		OP.1	
PRACH configuration			FR2 PRACH configuration 1		FR2 PRACH configuration 1		FR2 PRACH configuration 1	
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-89		-89		-89	
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-5.45	1	-11.67	-1.2	-11.67	-1.2
Io	Config 1	dBm/19.08MHz	-55.48	-51.23	-55.48	-51.23	-55.48	-51.23
PRS $\hat{E}_s/I_{ot}$		dB	-6	-3	-13	-6	-13	-6
PRS-RSRP ^{Note 4}		dBm/SCS	-94.45	-88	-100.67	-90.2	-100.67	-90.2
Propagation Condition			AWGN					
Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.								
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.								
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 4: PRP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters. The Io is calculated based only on the symbols in which PRS is transmitted.								
Note 5: Calculation of Es/Iot includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMBP from TS 38.101-2 [19] Table 6.2.1.3-4.								

A.7.6.9.4.2 Test Requirements

The RSTD measurement time fulfils the gapless RSTD measurement reporting delay requirements specified in Clause 9.9.2.7.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.2.7 starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD_1970049.

A.7.6.9.5 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR2 SA in RRC_CONNECTED state with Rx TEG

A.7.6.9.5.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the Rx TEG based measurement period requirements specified in Clause 9.9.2.5 in an environment with AWGN propagation conditions in FR2 in standalone scenario when single positioning frequency layer is configured.

Supported test configurations are shown in table A.7.6.9.5.1-1. The test parameters are as given in Table A7.6.9.5.1-2, Table A.7.6.9.5.1-3 and, Table A.7.6.9.5.1-4.

Table A.7.6.9.5.1-1: Supported test configurations for NR RSTD

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All cells are on the same RF channel distributed in single positioning frequency layer.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance data* and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID # 24 or #13 before T2.

The test applies to the UE supporting Rx TEG indicated via *NR-UE-TEG-Capability* and is requested to provide the Rx TEG in the test via *nr-UE-RxTEG-Request-r17* in *NR-TDOA-RequestLocationInformation*. In the location request *measureSameDL-PRS-ResourceWithDifferentRxTEGs-r17* is set to n0. The UE shall perform and optionally report the Rx TEG based RSTD measurements.

The UE is capable of performing Rx TEG based RSTD measurements. UE may or may not be able to receive same DL PRS resource from the same TRP simultaneously from multiple Rx TEGs.

Table A.7.6.9.5.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
BW _{channel}	Config 1	MHz	200: N _{RB,c} = 132	
SSB configuration	Config 1		SSB.3 FR2	
SMTC configuration	Config 1		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
RMSI CORESET RMC configuration	Config 1		CR.3.1 TDD	As specified in clause A.3.1.2.1
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
PRS Configuration	Config 1		PRS.1.4. FR2	As specified in clause A.3.31
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX			OFF	
Measurement gap			GP#24 or GP#13	GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured
Radio frame receive time offset between the cells at the UE antenna connector		μs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD		μs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells		μs	5	The corresponding parameter in the DL-TDOA

			assistance data specified in TS 37.355 [34] is the expected RSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		4	Including the reference cell
PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'	Corresponds to prs-MutingInfo defined in TS 37.355 [24]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	s	$1.28 \cdot k_{multiTEG}$ ^{Note 1}	The length of the time interval that follows immediately after time interval T1
AoA setup		Setup 1	As defined in A.3.15.1
Beam assumption		Rough	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 1: $k_{multiTEG} = \left\lceil \frac{N_{TEG}}{k_{TEG,simul}} \right\rceil$ if UE is capable of receiving the same DL PRS resource from the same TRP simultaneously from multiple Rx TEGs, where N_{TEG} is the maximum number of Rx TEGs with which UE can support to measure the same PRS resource, and $k_{TEG,simul}$ is the number of Rx TEGs UE can measure simultaneously which is reported via <i>measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul</i>.			

Table A.7.6.9.5.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positioning frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.5 FDD	N/A	N/A
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-89		
PRS $\hat{E}_s / N_{oc}$		dB	-Infinity	-Infinity	-Infinity
I_0 ^{Note 4}	Config 1	dBm/190.08MHz	-54.00	-54.00	-54.00
SSB RP ^{Note 4}	Config 1	dBm/SCS	-89	-Infinity	-Infinity
SSB $\hat{E}_s / N_{oc}$		dB	0	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1:	OCNG shall be used such that active cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 3:	Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4:	SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.7.6.9.5.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1	Cell 2	Cell 3
			T2	T2	T2
RF Channel Number			1	1	1
Positioning frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
PRACH configuration			FR2 PRACH configuration 1	FR2 PRACH configuration 1	FR2 PRACH configuration 1
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-89	-89	-89
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	-5.44	-11.67	-11.67
Io	Config 1	dBm/190.08MHz	-55.48	-55.48	-55.48
PRS $\hat{E}_s/I_{ot}$		dB	-6	-13	-13
PRP ^{Note 4}		dBm/SCS	-94.44	-100.67	-100.67
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the subframes with transmitted PRS.					
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 4: PRP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters. The Io is calculated based only on the symbols in which PRS is transmitted.					
Note 5: Calculation of Es/Iot includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					

A.7.6.9.5.2 Test Requirements

The RSTD measurement time fulfils the Rx TEG based RSTD measurement period requirements specified in Clause 9.9.2.5. The UE shall perform and report the Rx TEG based RSTD measurements for Cell 2 and Cell 3 with

respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 9.9.2.5 starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD1970049.

A.7.6.10 PRS-RSRP measurements

A.7.6.10.1 PRS-RSRP reporting delay test case for single positioning frequency layer

A.7.6.10.1.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRP measurement requirements specified in Clause 9.9.3.5 for single positioning frequency layer under AWGN propagation conditions in standalone scenario. Supported test configurations are shown in table A.7.6.10.1.1-1

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.6.10.1.1-2, and table A.7.6.10.1.1-3.

Table A.7.6.10.1.1-1: supported test configurations for PRS RSRP measurement for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.6.10.1.1-2: General test parameters for PRS RSRP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
Gap Pattern Id		Config 1	GP#13 or GP#24 ^{Note1}	As specified in clause 9.1.2-1.

Measurement gap offset		Config 1	39	
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3µs	Synchronous cells.
Expected RSTD	µs	Config 1	3	
Expected RSTD uncertainty	µs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	7	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.				

Table A.7.6.10.1.1-3: Cell-specific test parameters for PRS RSRP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
BW _{channel}		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP BW							
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.1 FR2		PRS.1.1 FR2	
PRS muting configuration			Config 1	'10'		'01'	
EPRE ratio of PSS to SSS							
EPRE ratio of PBCH DMRS to SSS							

EPRE ratio of PBCH to PBCH DMRS		Config 1	0		0	
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz Note5		-98		-98	
N_{oc} ^{Note2}	dBm/S CS Note4	Config 1	-89		-89	
SSB_RP ^{Note 3}	dBm/S CS Note5	Config 1	-91	-91	-Infinity	-99
PRP ^{Note 3}	dBm/S CS Note5	Config 1	-Infinity	-91	-Infinity	-99
PRS $\hat{E}_s/I_{ot}$	dB	Config 1	-Infinity	-2.41	-Infinity	-12.12
PRS $\hat{E}_s/N_{oc}$	dB	Config 1	-Infinity	-2	-Infinity	-10
SSB $\hat{E}_s/N_{oc}$	dB	Config 1	-2	-2	-Infinity	-10
I_0 ^{Note3}	dBm/19 0.08 MHz Note5	Config 1	-54.88	-54.88	-54.88	-54.62
Propagation Condition		Config 1	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB_RP/PRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 8: Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.						

A.7.6.10.1.2 Test Requirements

The PRS RSRP measurement time fulfils the requirements specified in Clause 9.9.3.5. The UE shall perform and report the PRS RSRP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 9.9.3.5 starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRP measurement for each correct event shall be within the PRS RSRP reporting range specified in Clause 10.1.24.3, i.e., between PRS RSRP_0 and PRS RSRP_126.

A.7.6.10.2 PRS-RSRP reporting delay test case for dual positioning frequency layer

A.7.6.10.2.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRP measurement requirements specified in Clause 9.9.3.5 for dual positioning frequency layers under AWGN propagation conditions in standalone scenario. Supported test configurations are shown in table A.7.6.10.2.1-1

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the different frequency from the PCell.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.6.10.2.1-2, and table A.7.6.10.2.1-3.

Table A.7.6.10.2.1-1: supported test configurations for PRS RSRP measurement for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.6.10.2.1-2: General test parameters for PRS RSRP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
Gap Pattern Id		Config 1	GP#13 or GP#24 ^{Note1}	As specified in clause 9.1.2-1.

Measurement gap offset		Config 1	39	
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3µs	Synchronous cells.
Expected RSTD	µs	Config 1	3	
Expected RSTD uncertainty	µs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	7	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.				

Table A.7.6.10.2.1-3: Cell-specific test parameters for PRS RSRP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
BW _{channel}		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP BW							
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.1 FR2		PRS.1.2 FR2	
PRS muting configuration			Config 1	'10'		'01'	
EPRE ratio of PSS to SSS							
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							

EPRE ratio of PDCCH DMRS to SSS		Config 1	0	0		
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz Note5		-98		-98	
N_{oc} Note2	dBm/S CS Note4	Config 1	-89		-89	
SSB_RP Note 3	dBm/S CS Note5	Config 1	-92	-92	-Infinity	-102
PRP Note 3	dBm/S CS Note5	Config 1	-Infinity	-92	-Infinity	-102
PRS $\hat{E}_s/I_{ot}$	dB	Config 1	-Infinity	-3	-Infinity	-13
PRS $\hat{E}_s/N_{oc}$	dB	Config 1	-Infinity	-3	-Infinity	-13
SSB $\hat{E}_s/N_{oc}$	dB	Config 1	-3	-3	-Infinity	-13
I_o Note3	dBm/19 0.08 MHz Note5	Config 1	-55.24	-55.24	-57.00	-56.79
Propagation Condition		Config 1	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB_RP/PRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 8: Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.						

A.7.6.10.2.2 Test Requirements

The PRS RSRP measurement time fulfils the requirements specified in Clause 9.9.3.5. The UE shall perform and report the PRS RSRP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 9.9.3.5 starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRP measurement for each correct event shall be within the PRS RSRP reporting range specified in Clause 10.1.24.3, i.e., between PRS RSRP₀ and PRS RSRP₁₂₆.

A.7.6.10.3 PRS-RSRP reporting delay test case for reduced number of samples

A.7.6.10.3.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRP measurement requirements for reduced number of samples specified in Clause 9.9.3.5 for single positioning frequency layer under AWGN propagation conditions in standalone scenario. Supported test configurations are shown in table A.7.6.10.3.1-1. In this test PRS is transmitted within the active BWP of the UE.

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n. UE can support *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED*, and the LMF indicates the UE to perform positioning measurements with reduced number of samples N_{sample} via *reducedDL-PRS-ProcessingSamples*.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.6.10.3.1-2, and table A.7.6.10.3.1-3.

Table A.7.6.10.3.1-1: supported test configurations for PRS RSRP measurement for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.6.10.3.1-2: General test parameters for PRS RSRP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
Gap Pattern Id		Config 1	GP#13 or GP#24 ^{Note1}	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	

SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
Expected RSTD	μs	Config 1	3	
Expected RSTD uncertainty	μs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	7	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.				

Table A.7.6.10.3.1-3: Cell-specific test parameters for PRS RSRP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
BW _{channel}		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP BW		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.1 FR2		PRS.1.1 FR2	
PRS BW			Config 1	48 PRBs		48 PRBs	
PRS muting configuration			Config 1	'10'		'01'	
EPRE ratio of PSS to SSS							

EPRE ratio of PBCH DMRS to SSS	dB	Config 1	0		0	
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
EPRE ratio of PRS to SSS						
N_{oc} ^{Note2}	dBm/15 kHz Note5		-98		-98	
N_{oc} ^{Note2}	dBm/S CS Note4	Config 1	-89		-89	
PRS-RSRP ^{Note 3}	dBm/S CS Note5	Config 1	-Infinity	-86.77	-Infinity	-90.73
PRS $\hat{E}_s/I_{ot}$	dB	Config 1	-Infinity	0	-Infinity	-6
PRS $\hat{E}_s/N_{oc}$	dB	Config 1	-Infinity	2.23	-Infinity	-1.73
I_o ^{Note3}	dBm/19 0.08 MHz Note5	Config 1	-51.76		-51.76	
Propagation Condition		Config 1	AWGN			
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	PRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	PRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone					
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					
Note 8:	Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					

A.7.6.10.3.2 Test Requirements

The PRS RSRP measurement time fulfils the requirements specified in Clause 9.9.3.5. The UE shall perform and report the PRS RSRP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 9.9.3.5 starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRP measurement for each correct event shall be within the PRS RSRP reporting range specified in Clause 10.1.24.3, i.e., between PRS RSRP_0 and PRS RSRP_126.

A.7.6.10.4 PRS-RSRP reporting delay test case for single positioning frequency layer outside MG

A.7.6.10.4.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRP measurement outside MG requirements specified in Clause 9.9.3.6 for single positioning frequency layer under AWGN propagation conditions in standalone scenario. There are two sub-tests in the test, sub-test 1 is to verify the delay requirements with Nsample=1, and sub-test 2 is to verify the delay requirements with Nsample=4.

Supported test configurations are shown in table A.7.6.10.4.1-1

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n. In sub-test 1, *reducedDL-PRS-ProcessingSamples* shall be included in the location information request and set to 'requested', and *lowerRxBeamSweepingThan8-FR2* shall be included.

During T1, a PPW shall be configured for the PCell and be activated via DL MAC CE. The last PDSCH containing the MAC CE shall be transmitted before slot #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first PPW instance containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The general test parameters are as given in table A.7.6.10.4.1-2, and cell specific test parameters during T2 are listed in table A.7.6.10.4.1-3.

Table A.7.6.10.4.1-1: supported test configurations for PRS RSRP measurement for FR2

Config	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.6.10.4.1-2: General test parameters for PRS RSRP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment

NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
PPW configuration		Config 1	PPW.1	As specified in clause A.3.33 As specified in clause A.3.33
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
CP length		Config 1	Normal	
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells	μs	Config 1	0.58, 2.0 or 3 ^{Note 1}	
Expected RSTD	μs	Config 1	0	
Expected RSTD uncertainty	μs	Config 1	Same as time offset between serving and neighbour cells	
T1	s	Config 1	5	
T2	s	Config 1	7	
NOTE 1: If UE indicates support of CP length for the receive time difference threshold, the time offset is set to 0.58 μs ; If UE indicates support of 1/4 symbol length for the receive time difference threshold, the time offset is set to 2.0 μs , otherwise 3 μs .				

Table A.7.6.10.4.1-3: Cell-specific test parameters during T2 for PRS RSRP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				Sub-test 1	Sub-test 2	Sub-test 1	Sub-test 2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
BW _{channel}		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP BW		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	

Dedicated CORESET RMC configuration		Config 1	CCR.3.1 TDD		-	
TRS configuration		Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1	120		120	
PRS configuration		Config 1	PRS.1.4 FR2		PRS.1.4 FR2	
PRS muting configuration		Config 1	'10'		'01'	
EPRE ratio of PSS to SSS		Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz Note5		-98		-98	
N_{oc} ^{Note2}	dBm/S CS Note4	Config 1	-89		-89	
SS-RSRP ^{Note 3}	dBm/S CS Note5	Config 1	-89	-89	-89	-89
PRS-RSRP ^{Note 3}	dBm/S CS Note5	Config 1	-86.77	-91	-90.73	-99
PRS $\hat{E}_s/I_{ot}$	dB	Config 1	0	-2.41	-6	-12.12
PRS $\hat{E}_s/N_{oc}$	dB	Config 1	2.23	-2	-1.73	-10
I_0 ^{Note3}	dBm/19 0.08 MHz Note5	Config 1	-51.76	-54.62	-51.76	-54.62
Propagation Condition		Config 1	AWGN			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP/PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_F from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.10.4.2 Test Requirements

The PRS RSRP measurement time fulfils the requirements specified in Clause 9.9.3.6, with $N_{sample}=1$ for sub-test 1 and $N_{sample}=4$ for sub-test 2. The UE shall perform and report the PRS RSRP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 9.9.3.6 starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRP measurement for each correct event shall be within the PRS RSRP reporting range specified in Clause 10.1.24.3, i.e., between PRS RSRP₀ and PRS RSRP₁₂₆.

A.7.6.11 UE Rx-Tx time difference measurements

A.7.6.11.1 UE Rx-Tx time difference measurements for single positioning frequency layer in FR2 SA

A.7.6.11.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.5 in AWGN propagation condition in FR2 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations in listed in Table A.7.6.11.1.1-1.

Table A.7.6.11.1.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the multi-RTT assistance data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID #13 or ID #24 before T2.

The UE is configured to transmit positioning SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.6.11.1.1-2 and Table A.7.6.11.1.1-3 respectively.

T Table A.7.6.11.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	Cell 1 is the PCell in NR-Multi-RTT-ProvideAssistanceData [34].
Neighbour cell		1	Cell 2	Cell 2 is a neighbour cell in NR-Multi-RTT-ProvideAssistanceData [34].
RF Channel Number		1	1	For both Cell 1 and Cell 2
BW_{channel}	MHz	1	200: $N_{RB,C} = 132$	
SSB configuration		1	SSB.2 FR2	
SMTC configuration		1	SMTC.1	
Measurement gap		1	GP#24 or GP#13 ^{Note 1}	
CP length		1	Normal	
DRX		1	OFF	
Time offset between serving and neighbour cells	μs	1	3	Synchronous cells
Expected RSTD	μs	1	3	
Expected RSTD uncertainty	μs	1	5	
T1	s	1	5	
T2	s	1	20	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.				

T Table A.7.6.11.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}		1	Rough		Rough	
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	

RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
OCNG Patterns		1	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.2.1 TDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1	DLBWP.1.1		N/A	
Active UL BWP configuration		1	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.1 FR2		PRS.1.1 FR2	
PRS muting info		1	‘10’		‘01’	
SRS configuration		1	POS-SRS.3		N/A	
N_{oc} ^{Note 2}	dBm/SCS	1	-89			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41	-Infinity	-12.12
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2	-Infinity	-10
PRP ^{Note 3}	dBm/SCS kHz	1	-Infinity	-91	-Infinity	-99
Io	dBm/9190.08 MHz	1	N/A	-54.62	N/A	-54.62
Propagation Condition		1	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	PRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

Table Table A.7.6.11.1.1-4: Void

A.7.6.11.1.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.5.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.7.6.11.2 UE Rx-Tx time difference measurement period for dual positioning frequency layers in FR2 SA

A.7.6.11.2.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.5 in AWGN propagation condition in FR2 in standalone scenario when dual positioning frequency layers are configured.

The supported test configurations in listed in Table A.7.6.11.2.1-1.

Table A.7.6.11.2.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 200 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on different RF channels in FR2.

transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the multi-RTT assistance data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID #13 or ID #24 before T2.

The UE is configured to transmit positioning SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.6.11.2.1-2 and Table A.7.6.11.2.1-3 respectively.

Table A.7.6.11.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	Cell 1 is the PCell in NR-Multi-RTT-ProvideAssistanceData [34].
Neighbour cell		1	Cell 2	Cell 2 is a neighbour cell in NR-Multi-RTT-ProvideAssistanceData [34].
RF Channel Number		1	1	For Cell 1
RF Channel Number		1	2	For Cell 2
BW _{channel}	MHz	1	200: N _{RB,C} = 132	
SSB configuration		1	SSB.2 FR2	
SMTC configuration		1	SMTC.1	
Measurement gap		1	GP#24 or GP#13 Note 1	
CP length		1	Normal	
DRX		1	OFF	
Time offset between serving and neighbour cells	μs	1	3	Synchronous cells
Expected RSTD	μs	1	3	
Expected RSTD uncertainty	μs	1	5	
T1	s	1	5	
T2	s	1	20	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.				

Table A.7.6.11.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}		1	Rough		Rough	
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
OCNG Patterns		1	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1	0		0	

EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
EPRE ratio of PRS to SSS						
TRS Configuration						
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	N/A		
Active DL BWP configuration		1	DLBWP.1.1	N/A		
Active UL BWP configuration		1	ULBWP.1.1	N/A		
PRS configuration		1	PRS.1.1 FR2	PRS.1.1 FR2		
PRS muting info		1	‘10’	‘01’		
SRS configuration		1	POS-SRS.3	N/A		
N_{oc} ^{Note 2}	dBm/SCS	1	-89			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-3	-Infinity	-13
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-3	-Infinity	-13
PRP ^{Note 3}	dBm/SCS kHz	1	-Infinity	-92	-Infinity	-102
I_o	dBm/190.08 MHz	1	N/A	-55.24	N/A	-56.79
Propagation Condition		1	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: PRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 8: Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.						

Table Table A.7.6.11.1.1-4: Void**A.7.6.11.2.2 Test requirements**

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.5.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.7.6.11.3 UE Rx-Tx time difference measurements for single positioning frequency layer in FR2 SA with reduced sample number**A.7.6.11.3.1 Test purpose and environment**

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.5 with $N_{sample} = 1$ in AWGN propagation condition in FR2 in standalone scenario when single positioning frequency layer is configured. In this test PRS is transmitted within the active BWP of the UE. UE can support *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED*, and the LMF indicates the UE to perform positioning measurements with reduced number of samples N_{sample} via *reducedDL-PRS-ProcessingSamples*.

The supported test configurations are listed in Table A.7.6.11.3.1-1.

Table A.7.6.11.3.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 200 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the multi-RTT assistance data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID #13 or ID #24 before T2.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.6.11.3.1-2 and Table A.7.6.11.3.1-3 respectively.

Table A.7.6.11.3.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	Cell 1 is the PCell in NR-Multi-RTT-ProvideAssistanceData [34].
Neighbour cell		1	Cell 2	Cell 2 is a neighbour cell in NR-Multi-RTT-ProvideAssistanceData [34].
RF Channel Number		1	1	For both Cell 1 and Cell 2
BW_{channel}	MHz	1	200: $N_{RB,C} = 132$	
SSB configuration		1	SSB.3 FR2	
SMTC configuration		1	SMTC.1	
Measurement gap		1	GP#24 or GP#13 ^{Note 1}	
CP length		1	Normal	
DRX		1	OFF	
Time offset between serving and neighbour cells	μs	1	3	Synchronous cells
T1	s	1	5	
T2	s	1	20	

NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.

Table A.7.6.11.3.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}		1	Rough		Rough	
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
OCNG Patterns		1	OP.1		OP.1	
TRS Configuration		1	TRS.2.1 TDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1	DLBWP.1.1		N/A	
Active UL BWP configuration		1	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.1 FR2		PRS.1.1 FR2	
PRS BW			64 PRBs		64 PRBs	
PRS muting info		1	‘10’		‘01’	
SRS configuration		1	POS-SRS.3		N/A	
N_{oc} ^{Note 2}	dBm/SCS	1	-89			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	0	-Infinity	-6
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	2.23	-Infinity	-1.73
PRS-RSRP ^{Note 3}	dBm/SCS kHz	1	-Infinity	-86.77	-Infinity	-90.73
I_o	dBm/190.08 MHz	1	N/A	-51.76	N/A	-51.76

Propagation Condition	1	AWGN
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.	
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.	
Note 3:	SS-RSRP, PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.	
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.	
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone	
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone	
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation	
Note 8:	Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.	

A.7.6.11.3.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.5 with $N_{sample}=1$.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.7.6.11.4 UE Rx-Tx time difference measurements without gaps in FR2 SA

A.7.6.11.4.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.6 in AWGN propagation condition in FR2 in standalone scenario. There are two sub-tests in the test, sub-test 1 is to verify the delay requirements with $N_{sample}=1$, and sub-test 2 is to verify the delay requirements with $N_{sample}=4$.

The supported test configurations are listed in Table A.7.6.11.4.1-1.

Table A.7.6.11.4.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 200 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be

provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the multi-RTT assistance data and location information request.

The beginning of the time interval T2 shall be aligned with the beginning of PRS processing window containing the PRS resources.

The UE is configured with PRS processing window before T2.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.6.11.4.1-2 and Table A.7.6.11.4.1-3 respectively.

Table A.7.6.11.4.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	Cell 1 is the PCell in NR-Multi-RTT-ProvideAssistanceData [34].
Neighbour cell		1	Cell 2	Cell 2 is a neighbour cell in NR-Multi-RTT-ProvideAssistanceData [34].
RF Channel Number		1	1	For both Cell 1 and Cell 2
BW_{channel}	MHz	1	200: $N_{\text{RB},c} = 132$	
SSB configuration		1	SSB.3 FR2	
SMTC configuration		1	SMTC.1	
PRS processing window		1	Table A.3.33-1: Reference PPW configuration	As defined in A.3.33
CP length		1	Normal	
DRX		1	OFF	
Time offset between serving and neighbour cells	μs	1	0.58, 2.25 or 3 ^{Note 1}	
Expected RSTD	μs	1	0	
Expected RSTD uncertainty	μs	1	Same as time offset between serving and neighbour cells	
T1	s	1	5	
T2	s	1	20	
NOTE 1: The value is up to the UE capability. The possible UE capability value: (1/4 symbol, 1/2 symbol, CP length, half of slot). When the UE reported value is $> 3\mu\text{s}$, the time offset between serving and neighbour cells is set to $3\mu\text{s}$; when the UE reported value is $< 3\mu\text{s}$, the time offset between serving and neighbour cells is set to the UE reported value.				

Table A.7.6.11.4.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			Sub-test 1	Sub-test 2	Sub-tets 1	Sub-test 2
AoA setup		1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}		1	Rough		Rough	
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
OCNG Patterns		1	OP.1		OP.1	

TRS Configuration		1	TRS.2.1 TDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1	DLBWP.1.1		N/A	
Active UL BWP configuration		1	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.1 FR2		PRS.1.1 FR2	
PRS BW		1	64PRBs	64 PRBs	64 PRBs	64 PRBs
PRS muting info		1	'10'		'01'	
SRS configuration		1	POS-SRS.3		N/A	
N_{oc} Note 2	dBm/SCS	1	-89			
N_{oc} Note 2	dBm/15 kHz	1	-98			
PRS $\hat{E}_s/I_{ot}$	dB	1	0	-2.41	-6	-12.12
PRS $\hat{E}_s/N_{oc}$	dB	1	2.23	-2	-1.73	-10
PRS-RSRP Note 3	dBm/SCS kHz	1	-86.77	-91	-90.73	-99
I_o	dBm/190.08 MHz	1	-51.76	-54.62	-51.76	-54.62
Propagation Condition		1	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone					
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					
Note 8:	Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					

A.7.6.11.4.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.6.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.7.6.11.5 UE Rx-Tx time difference measurements for single positioning frequency layer in FR2 SA with RxTx TEG

A.7.6.11.5.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 9.9.4.5 in AWGN propagation condition in FR2 in standalone scenario when single positioning frequency layer is configured, and when UE is requested to measure a PRS resource with RxTx TEG.

The supported test configurations are listed in Table A.7.6.11.5.1-1.

Table A.7.6.11.5.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 200 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The test applies to the UE supporting RxTx TEG indicated via *NR-UE-TEG-Capability* and is requested to provide the RxTx TEG in the test via *nr-UE-RxTxTEG-Request-r17* in *nr-Multi-RTT-RequestLocationInformation*. The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the multi-RTT assistance data and location information request. In *nr-Multi-RTT-RequestLocationInformation*, *measureSameDL-PRS-ResourceWithDifferentRxTxTEGs-r17* shall be set to 'n2'.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources.

The UE is configured with measurement gap pattern ID #13 or ID #24 before T2.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.6.11.5.1-2 and Table A.7.6.11.5.1-3 respectively.

Table A.7.6.11.5.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	Cell 1 is the PCell in NR-Multi-RTT-ProvideAssistanceData [34].
Neighbour cell		1	Cell 2	Cell 2 is a neighbour cell in NR-Multi-RTT-ProvideAssistanceData [34].
RF Channel Number		1	1	For both Cell 1 and Cell 2
BW _{channel}	MHz	1	200: N _{RB,C} = 132	
SSB configuration		1	SSB.3 FR2	
SMTc configuration		1	SMTc.1	
Measurement gap		1	GP#24 or GP#13 ^{Note 1}	
CP length		1	Normal	
DRX		1	OFF	
Time offset between serving and neighbour cells	μs	1	3	Synchronous cells

T1	s	1	5	
T2	s	1	20	
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.				

Table A.7.6.11.5.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}		1	Rough		Rough	
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
OCNG Patterns		1	OP.1		OP.1	
TRS Configuration		1	TRS.2.1 TDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		N/A	
Active DL BWP configuration		1	DLBWP.1.1		N/A	
Active UL BWP configuration		1	ULBWP.1.1		N/A	
PRS configuration		1	PRS.1.1 FR2		PRS.1.1 FR2	
PRS muting info		1	'10'		'01'	
SRS configuration		1	POS-SRS.3		N/A	
N_{oc} ^{Note 2}	dBm/SCS	1	-89			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41	-Infinity	-12.12
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2	-Infinity	-10
PRS-RSRP ^{Note 3}	dBm/SCS kHz	1	-Infinity	-91	-Infinity	-99
I_o	dBm/190.08 MHz	1	N/A	-54.62	N/A	-54.62
Propagation Condition		1	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone					
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					
Note 8:	Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					

A.7.6.11.5.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 9.9.4.5, with $k_{multiTEG}=2$ if UE does not support or indicate value 'n1' for *measureSameDL-PRS-ResourceWithDifferentRxTEGsSimul*, and $k_{multiTEG}=1$ otherwise.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.7.6.12 PRS-RSRPP measurements

A.7.6.12.1 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR2 in RRC_CONNECTED state

A.7.6.12.1.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRPP measurement requirements specified in Clause 9.9.6.5 for single positioning frequency layer under two-tap channel in standalone scenario. Supported test configurations are shown in table A.7.6.12.1.1-1.

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the Pcell.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.6.12.1.1-2, and table A.7.6.12.1.1-3.

Table A.7.6.12.1.1-1: supported test configurations for PRS RSRPP measurement for FR2

Config	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.6.12.1.1-2: General test parameters for PRS RSRPP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.

Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
Gap Pattern Id		Config 1	GP#13 or GP#24 ^{Note1}	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
Expected RSTD	μs	Config 1	3	
Expected RSTD uncertainty	μs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	7	

Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.

Table A.7.6.12.1.1-3: Cell-specific test parameters for PRS RSRPP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
BW _{channel}		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP BW		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	

Dedicated CORESET RMC configuration		Config 1	CCR.3.1 TDD		-	
TRS configuration		Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1	120		120	
PRS configuration		Config 1	PRS.1.4 FR2		PRS.1.4 FR2	
PRS muting configuration		Config 1	'10'		'01'	
EPRE ratio of PSS to SSS						
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS		Config 1	0		0	
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15 kHz Note5		-98		-98	
N_{oc} Note2	dBm/S CS Note4	Config 1	-89		-89	
SS-RSRP Note 3	dBm/S CS Note5	Config 1	-89	-89	-Infinity	-89
PRS-RSRP Note 3	dBm/S CS Note5	Config 1	-Infinity	-91	-Infinity	-99
$\hat{E}_s/I_{ot}$ PRS	dB	Config 1	-Infinity	-2.41	-Infinity	-12.12
$\hat{E}_s/N_{oc}$ PRS	dB	Config 1	-Infinity	-2	-Infinity	-10
I_o Note3	dBm/19 0.08 MHz Note5	Config 1	-54.00	-54.62	-54.00	-54.62
Propagation Condition		Config 1	Two-tap channel defined in 38.101-4 Annex B.2.4, $a = 1$, $\tau_d = 0.45 \mu s$ and $f_D = 5$ Hz			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP/PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of Es/Iot includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.12.1.2 Test Requirements

The PRS RSRPP measurement time fulfils the requirements specified in Clause 9.9.6.5. The UE shall perform and report the PRS RSRPP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 9.9.6.5 starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRPP measurement for each correct event shall be within the PRS RSRPP reporting range specified in Clause 10.1.38, i.e., between PRS RSRPP_0 and PRS RSRPP_126.

A.7.6.12.2 PRS-RSRPP reporting delay test case for reduced number of samples for single positioning frequency layer in FR2 in RRC_CONNECTED state

A.7.6.12.2.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRPP measurement requirements specified in Clause 9.9.6.5 for single positioning frequency layer under two-tap channel in standalone scenario. Supported test configurations are shown in table A.7.6.12.2.1-1. In this test PRS is transmitted within the active BWP of the UE. UE can support *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED*, and the LMF indicates the UE to perform positioning measurements with reduced number of samples N_{sample} via *reducedDL-PRS-ProcessingSamples*.

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.6.12.2.1-2, and table A.7.6.12.2.1-3.

Table A.7.6.12.2.1-1: supported test configurations for PRS RSRPP measurement for FR2

Config	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.6.12.2.1-2: General test parameters for PRS RSRPP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
Gap Pattern Id		Config 1	GP#13 or GP#24 ^{Note1}	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3µs	Synchronous cells.
Expected RSTD	µs	Config 1	3	
Expected RSTD uncertainty	µs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	7	
Note 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.				

Table A.7.6.12.2.1-3: Cell-specific test parameters for PRS RSRPP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
BW _{channel}		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP BW		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	

	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.4 FR2		PRS.1.4 FR2	
PRS muting configuration			Config 1	'10'		'01'	
EPRE ratio of PSS to SSS			Config 1	0	0		
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}	dBm/15 kHz Note5			-98		-98	
N_{oc}^{Note2}	dBm/S CS Note4		Config 1	-89		-89	
SS-RSRP ^{Note 3}	dBm/S CS Note5		Config 1	-89	-86.77	-Infinity	-90.73
PRS-RSRP ^{Note 3}	dBm/S CS Note5		Config 1	-Infinity	-86.77	-Infinity	-90.73
PRS $\hat{E}_s/I_{ot}$	dB		Config 1	-Infinity	0	-Infinity	-6
PRS $\hat{E}_s/N_{oc}$	dB		Config 1	-Infinity	2.23	-Infinity	-1.73
I_o^{Note3}	dBm/19 0.08 MHz Note5		Config 1	-54.00	-51.76	-54.00	-51.76
Propagation Condition			Config 1	Two-tap channel defined in 38.101-4 Annex B.2.4, $a = 1$, $\tau_d = 0.45 \mu s$ and $f_D = 5 \text{ Hz}$			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP/PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_p from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.6.12.2.2 Test Requirements

The PRS RSRPP measurement time fulfils the requirements specified in Clause 9.9.6.5. The UE shall perform and report the PRS RSRPP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 9.9.6.5 starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRPP measurement for each correct event shall be within the PRS RSRPP reporting range specified in Clause 10.1.38, i.e., between PRS RSRPP_0 and PRS RSRPP_126.

A.7.6.12.3 PRS-RSRPP reporting delay test case for gapless measurement in FR2

A.7.6.12.3.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRPP measurement requirements specified in Clause 9.9.6.6 for single positioning frequency layer under two-tap channel in standalone scenario. Reporting delay test for gapless PRS measurement is conducted assuming that the PRS has higher priority, i.e., state 1, than all other DL signals/channels and is transmitted within active DL BWP of UE. Two sub-tests are defined, sub-test 1 is for $N_{sample} = 4$ and sub-test 2 is for $N_{sample} = 1$. For sub-test 2 LMF indicates UE to perform PRS measurement with reduced number of samples N_{sample} via *reducedDL-PRS-ProcessingSamples*.

The supported test configurations are shown in table A.7.6.12.3.1-1.

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the Pcell.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first PRS processing window instance containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.6.12.3.1-2, and table A.7.6.12.3.1-3.

Table A.7.6.12.3.1-1: supported test configurations for PRS RSRPP measurement for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.6.12.3.1-2: General test parameters for PRS RSRPP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
PPW configuration		Config 1	Table A.3.33-1: Reference PPW configuration	As defined in A.3.33
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells	μ s	1, 2, 3	- set to the UE reported capability for receive time difference threshold if the UE reported value is $< 3\mu$s 3μs otherwise	Synchronous cells
Expected RSTD	μ s	1, 2, 3	0	
Expected RSTD uncertainty	μ s	1, 2, 3	Same as time offset	
T1	s	Config 1	5	
T2	ms	Config 1	10	In this test UE is configured to measure single PFL within the configured PPW.

Table A.7.6.12.3.1-3: Cell-specific test parameters during T2

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				Sub-test 1	Sub-test 2	Sub-test 1	Sub-test 2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
BW _{channel}		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP BW		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.4 FR2		PRS.1.4 FR2	
PRS BW				48 PRBs for sub-test 2		48 PRBs for sub-test 2	
PRS muting configuration			Config 1	'10'		'01'	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} ^{Note2}		dBm/15 kHz Note5		-98		-98	
N_{oc} ^{Note2}		dBm/S CS Note4	Config 1	-89		-89	

SS-RSRP ^{Note 3}	dBm/S CS Note5	Config 1	-91	-86.77	-99	-90.73
PRS-RSRP ^{Note 3}	dBm/S CS Note5	Config 1	-91	-86.77	-99	-90.73
PRS $\hat{E}_s/I_{ot}$	dB	Config 1	-2.41	0	-12.12	-6
PRS $\hat{E}_s/N_{oc}$	dB	Config 1	-2	2.23	-10	-1.73
I_o ^{Note3}	dBm/19 0.08 MHz Note5	Config 1	-54.62	-51.76	-54.62	-51.76
Propagation Condition		Config 1	Two-tap channel defined in 38.101-4 Annex B.2.4, $a = 1$, $\tau_d = 0.45 \mu s$ and $f_D = 5 \text{ Hz}$			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP/PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 8: Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_p from TS 38.101-2 [19] Table 6.2.1.3-4.						

A.7.6.12.3.2 Test Requirements

The UE shall perform and report the PRS-RSRPP measurements for Cell 1 and Cell 2, within the time limit specified in clause 9.9.6.5, starting from the beginning of time interval T2.

- NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the time duration above because of TTI insertion uncertainty of the measurement report in DCCH.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%.

A.7.6.13 UE Rx-Tx time difference measurements for PDC

A.7.6.13.1 UE Rx-Tx time difference measurement for propagation delay compensation using PRS in FR2

A.7.6.13.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement for RTT-based PDC meets the requirements specified in clause 9.12.4.1 in AWGN propagation condition in FR2 in standalone scenario.

The supported test configurations in listed in Table A.7.6.13.1.1-1.

Table A.7.6.13.1.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

The test is considered with one cell (Cell 1) in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. If the test is based on PRS, the Cell 1 mutes PRS transmission during T1 and transmits PRS during T2.

The *MeasObjectRxTxDiff-r17* with *prs-Ref-r17*, *measObject* with *measObjectRxTxDiff-17*, and *NR-DL-PRS-PDC-Info* as defined in TS 38.331 shall be provided to the UE during T1.

The last TTI containing the RRC configuration shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 10$ ms.

The beginning of the time interval T2 shall be aligned with the beginning of the first PRS resources.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.6.13.1.1-2. The test parameters for PRS are given Table A.7.6.13.1.1-3.

Table A.7.6.13.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value
Active cell		1	Cell 1
RF Channel Number		1	1
BW _{channel}	MHz	1	100: N _{RB,c} = 66
SSB configuration		1	SSB.2 FR2
SMTC configuration		1	SMTC.1
Measurement gap		1	GP#24 or GP#13 ^{Note 1}
CP length		1	Normal
DRX		1	OFF
T1	s	1	5
T2	s	1	20
NOTE 1: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.			

Table A.7.6.13.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1	
			T1	T2

AoA setup		1	Setup 1 as specified in clause A.3.15 AoA setup	
Beam Assumption ^{Note 7}		1	Rough	
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns		1	OP.1	
TRS Configuration		1	TRS.2.1 TDD	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1	
PRS configuration		1	PRS.1.1 FR2	
PRS muting info		1	'10'	
SRS configuration		1	PDC-SRS.3	
N_{oc} ^{Note 2}	dBm/SCS	1	-89	
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98	
PRS $\hat{E}_s / I_{ot}$	dB	1	-Infinity	-2.41
PRS $\hat{E}_s / N_{oc}$	dB	1	-Infinity	-2
PRS-RSRP ^{Note 3}	dBm/SCS kHz	1	-Infinity	-91
Io	dBm/95.04 MHz	1	N/A	-57.63
Propagation Condition		1	AWGN	
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: PRS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves				
Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone.				
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.6.13.1.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in 9.12.4.1.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1, for k=5.

The UE Rx-Tx time difference measurement time fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.39.2 for Cell 1.

A.7.6.13.2 UE Rx-Tx time difference measurement for propagation delay compensation using TRS in FR2

A.7.6.13.2.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement with TRS for RTT-based PDC meets the requirements specified in clause 9.12.4.2 for measurement delay and clause 10.1.39.3 for measurement accuracy in AWGN propagation condition in FR2 in standalone scenario.

The supported test configurations in listed in Table A.7.6.13.2.1-1.

Table A.7.6.13.2.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 100 MHz bandwidth, TDD duplex mode

The test is considered with one cell (Cell 1) in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 does not have TRS transmission during T1 and transmits TRS during T2.

The *MeasObjectRxTxDiff-r17* with *csi-RS-Ref-r17*, and *measObject* with *measObjectRxTxDiff-17* as defined in TS 38.331 shall be provided to the UE during T1.

The last TTI containing the RRC configuration shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = [10]$ ms is the maximum processing time of the measurement request.

The beginning of the time interval T2 shall be aligned with the beginning of the first TRS resources.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.6.13.2.1-2. The test parameters for PRS are given Table A.7.6.13.2.1-3.

Table A.7.6.13.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value
Active cell		1	Cell 1
RF Channel Number		1	1
BW _{channel}	MHz	1	100: N _{RB,c} = 66
SSB configuration		1	SSB.2 FR2
CP length		1	Normal
DRX		1	OFF
T1	s	1	5
T2	s	1	20

Table A.7.6.13.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1	
			T1	T2

AoA setup		1	Setup 1 as specified in clause A.3.15 AoA setup	
Beam Assumption ^{Note 7}		1	Rough	
TDD configuration		1	TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	
OCNG Patterns		1	OP.1	
TRS Configuration		1	TRS.2.1 TDD	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1	
SRS configuration		1	PDC-SRS.3	
N_{oc} ^{Note 2}	dBm/SCS	1	-89	
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98	
$\text{TRS } \hat{E}_s / I_{ot}$	dB	1	-Infinity	-2.41
$\text{TRS } \hat{E}_s / N_{oc}$	dB	1	-Infinity	-2
TRS-RSRP ^{Note 3}	dBm/SCS kHz	1	-Infinity	-91
I_o	dBm/95.04 MHz	1	N/A	-57.63
Propagation Condition		1	AWGN	
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: TRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: TRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone				
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.6.13.2.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in 9.12.4.2.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

The UE Rx-Tx time difference measurement time fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.39.3.

The reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1, for $k=5$.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%.

A.7.6.14 SA event triggered reporting tests with Pre-MG

A.7.6.14.1 Intra-frequency measurement test with SA event triggered reporting tests: with autonomous activation/deactivation of Pre-MG in FR2

A.7.6.14.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event with autonomous activation/deactivation of Pre-MG. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.7.6.14.1.2 Test parameters

Supported test configurations are shown in Table A.7.6.14.1.2-1. There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.14.1.2-2, A.7.6.14.1.2-3 and A.7.6.14.1.2-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A4 is used.

Before the test starts,

UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).

UE is configured with 2 different UE-specific bandwidth parts for Cell 1 (PCell), BWP-1 and BWP-2, before starting the test.

BWP-1 includes bandwidth of the initial DL BWP and SSB.

BWP-2 does not include bandwidth of the initial DL BWP and SSB.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell.

The TE schedules continuous DL data on PCell throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2 and T3, respectively.

During time period T1, BWP-1 is the active BWP. The Pre-MG is expected to be deactivated. UE shall be able to measure neighbor cell without gap.

The time period T2 starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

During time period T3, BWP-2 is the active BWP. The Pre-MG is expected to be activated. UE shall be able to measure neighbor cell within Pre-MG.

Table A.7.6.14.1.2-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.14.1.2-2: General test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	Unit	Value	Comment
Active cell		PCell (Cell 1)	
Neighbour cell		Cell 2	Cell to be identified.
RF Channel Number		1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTTC configuration		SMTTC.1	
A4-Threshold	dB	-120	
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
Gap Pattern Id		13	
Measurement gap offset	ms	39	
Time offset between Cell 1 and Cell 2		3 μ s	Synchronous cells
T1	s	0.1	
T2	s	0.2	
T3	s	5	

Table A.7.6.14.1.2-3: NR Cell specific test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
TDD configuration		TDDConf.3.1			TDDConf.3.1		
BW _{channel}	MHz	100: N _{RB,c} = 66			100: N _{RB,c} = 66		
Data RBs allocated		24			24		
Intial BWP configuration		DLBWP.0.1 ULBWP.0.1			DLBWP.0.1 ULBWP.0.1		
BWP-1 Configuration		DLBWP.1.6 ULBWP.1.6			N/A		
BWP-2 Configuration		DLBWP.1.5 ULBWP.1.5			N/A		
RLM-RS		CSI-RS			N/A		
PDSCH RMC configuration		SR.3.2 TDD			N/A		
RMSI CORESET RMC configuration		CR.3.1 TDD			N/A		
Dedicated CORESET RMC configuration		CCR.3.1 TDD			N/A		
TRS configuration		TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI states		TCI.State.2			N/A		
PDSCH/PDCCH subcarrier spacing	kHz	120			120		
OCNG Patterns		OP.5			N/A		
cellIndividualOffset	dB	N/A			16		
SSB		SSB.3 FR2			SSB.7 FR2		
Propagation Condition		No external noise (Note 1)			No external noise (Note 1)		
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].							

Table A.7.6.14.1.2-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 defined in A.3.15.3					
		AoA1			AoA2		
Beam assumption ^{Note 3}		Rough			Rough		
E _s	dBm/SCS	-89	-89	-89	-infinity	-Infinity	-89
$\hat{E}_s/I_{ot\ BB}$ ^{Note 4}	dB	-0.12	-0.12	-0.12	-Infinity	-Infinity	-0.12
SSB_RP	dBm/SCS	-89	-89	-89	-infinity	-Infinity	-89
I _o	dBm/95.04M Hz	-64.41	-64.41	-64.41	-Infinity	-Infinity	-64.41
Time multiplexing of the downlink transmissions from each AoA		Defined in Figure A.7.6.1.1.1-1					
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 3:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 4:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.						

A.7.6.14.1.3 Test Requirements

During T1, the UE shall be able to receive PDSCH and report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions.

During T2 and T3, the UE shall not report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions, starting from the 1st complete Pre-MG occasion after the beginning of PCell's DL slot ($i + T_{BWP\text{switchDelay}}$) + 5ms as defined in clause 8.19.2.

The UE shall send one Event A4 triggered measurement report, with a measurement reporting delay less than Y ms from the beginning of time period T3, where Y is

- 3.2s for a UE supporting power class 1 and 5,
- 1.92s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.14.2 Intra-frequency measurement test with SA event triggered reporting tests: with network-controlled activation/deactivation of Pre-MG in FR2

A.7.6.14.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event with network-controlled activation/deactivation of Pre-MG. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.6.2 and 9.2.6.3.

A.7.6.14.2.2 Test parameters

Supported test configurations are shown in Table A.7.6.14.2.2-1. There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.14.2.2-2, A.7.6.14.2.2-3 and A.7.6.14.2.2-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

Before the test starts,

UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).

UE is configured with 2 different UE-specific bandwidth parts for Cell 1 (PCell), BWP-1 and BWP-2, before starting the test.

BWP-1 includes bandwidth of the initial DL BWP and SSB with the Pre-MG status set to 'deactivated'.

BWP-2 does not include bandwidth of the initial DL BWP and SSB with the Pre-MG status set to 'activated'.

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell.

The TE schedules continuous DL data on PCell throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2 and T3, respectively.

The time period T2 starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The time period T3 starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *j*. The UE shall switch its bandwidth part from BWP-2 to BWP-1.

Table A.7.6.14.2.2-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.14.2.2-2: General test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	Unit	Value	Comment
Active cell		PCell (Cell 1)	
Neighbour cell		Cell 2	Cell to be identified.
RF Channel Number		1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		SMTC.1	

A3-Offset	dB	-11	
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
Gap Pattern Id		13	
Measurement gap offset	ms	39	
Time offset between Cell 1 and Cell 2		3 μ s	Synchronous cells
T1	s	0.1	
T2	s	0.2	
T3	s	5	

Table A.7.6.14.2.2-3: NR Cell specific test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
TDD configuration		TDDConf.3.1			TDDConf.3.1		
BW _{channel}	MHz	100: N _{RB,c} = 66			100: N _{RB,c} = 66		
Data RBs allocated		24			24		
Intial BWP configuration		DLBWP.0.1 ULBWP.0.1			DLBWP.0.1 ULBWP.0.1		
BWP-1 Configuration		DLBWP.1.6 ULBWP.1.6			N/A		
BWP-2 Configuration		DLBWP.1.5 ULBWP.1.5			N/A		
RLM-RS		CSI-RS			N/A		
PDSCH RMC configuration		SR.3.2 TDD			N/A		
RMSI CORESET RMC configuration		CR.3.1 TDD			N/A		
Dedicated CORESET RMC configuration		CCR.3.1 TDD			N/A		
TRS configuration		TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI states		TCI.State.2			N/A		
PDSCH/PDCCH subcarrier spacing	kHz	120			120		
OCNG Patterns		OP.5			N/A		
cellIndividualOffset	dB	N/A			16		
SSB		SSB.3 FR2			SSB.7 FR2		
Propagation Condition		No external noise (Note 1)			No external noise (Note 1)		
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].							

Table A.7.6.14.2.2-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting with network-controlled activation/deactivation of Pre-MG

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
AoA setup		Setup 3 defined in A.3.15.3					
Beam assumption ^{Note 3}		AoA1			AoA2		
		Rough			Rough		
E _s	dBm/SCS	-89	-89	-89	-infinity	-infinity	-89

$\hat{E}_s/I_{ot}$ BB Note 4	dB	-0.12	-0.12	-0.12	-Infinity	-infinity	-0.12
SSB_RP	dBm/SCS	-89	-89	-89	-infinity	-infinity	-89
I_o	dBm/95.04M Hz	-64.41	-64.41	-64.41	-Infinity	-infinity	-64.41
Time multiplexing of the downlink transmissions from each AoA		Defined in Figure A.7.6.1.1.1-1					
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2:	Es/lot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 3:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 4:	Calculation of Es/lotBB includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMBP from TS 38.101-2 [19] Table 6.2.1.3-4.						

A.7.6.14.2.3 Test Requirements

During T2, the UE shall not report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions, starting from the 1st complete Pre-MG occasion after the beginning of PCell's DL slot ($i + T_{BWPswitchDelay}$) + 5ms as defined in clause 8.19.2.

During T3, the UE shall be able to receive PDSCH and report corresponding valid ACK/NACK for those PDSCHs scheduled in the slots overlapped with the Pre-MG occasions, starting from the 1st complete Pre-MG occasion after the beginning of PCell's DL slot ($j + T_{BWPswitchDelay}$) + 5ms as defined in clause 8.19.2.

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T3, where X is

- 1.6s for a UE supporting power class 1 and 5,
- 0.96s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.15 SA event triggered reporting tests with concurrent gaps

A.7.6.15.1 SA event triggered reporting tests For FR2 with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements

A.7.6.15.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are three cells: NR cell 1 as PCell in FR2 on NR RF channel 1, NR cell 2 as neighbour cell in FR2 on NR RF channel 2, and NR cell 3 as neighbour cell in FR2 on NR RF channel 3. The test parameters and configurations are given in Tables A.7.6.15.1.1-1, A.7.6.15.1.1-2, and A.7.6.15.1.1-3.

Two measurement gaps with pattern configuration # 14 as defined in Table A.7.6.15.1.1-2 are provided for UE. The measurement object for NR RF channel 2 is associated with MG#1, and measurement object for NR RF channel 3 is associated with MG#2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 or NR cell 3.

Supported test configurations are shown in table A.7.6.15.1.1-1.

Table A.7.6.15.1.1-1 SA event triggered reporting tests without SSB index reading for FR2 with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.15.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2, 3	Three FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2 and 3	NR cell 2 is on NR RF channel number 2. NR cell 3 is on NR RF channel number 3.
Gap Pattern Id		Config 1	14 for both gaps	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	79 for MG#1 19 for MG#2	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 and 3 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3µs	Cell 2 and 3 are synchronous cells to cell 1.
T1	s	Config 1	5	
T2	s	Config 1	10.4 for PC1 and PC5; 6.5 for other PC	

Table A.7.6.15.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with fully non-overlapping concurrent MGs for SSB-based inter-frequency measurements

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
			T1	T2	T1	T2	T1	T2
AoA setup		Config 1	Setup 3 as specified in clause A.3.15					

				AoA1		AoA2		AoA2	
Beam Assumption ^{Note 4}			1,2	Rough		Rough		Rough	
NR RF Channel Number			Config 1	1		2		3	
Duplex mode			Config 1	TDD		TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated			Config 1	66		66		66	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A			
	Initial UL BWP			ULBWP.0.1		N/A			
	Dedicated DL BWP			DLBWP.1.1		N/A			
	Dedicated UL BWP			ULBWP.1.1		N/A			
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0		0	
$\hat{E}_s$	dBm/SCS		Config 1	-87	-87	-Infinity	-87	-Infinity	-87
SSBRP ^{Note 2}	dBm/SCS ^{Note 3}		Config 1	-87	-87	-Infinity	-87	-Infinity	-87
$\hat{E}_s / I_{ot_BB}$ ^{Note 5}	dB		Config 1	1.89	1.89	-Infinity	1.89	-Infinity	1.89
I_0 ^{Note 2}	dBm/95.0 4 MHz ^{Note 3}		Config 1	-58.01	-58.01	-Infinity	-58.01	-Infinity	-58.01

Propagation Condition	Config 1	No external noise (Note 6)
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.	
Note 2:	SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.	
Note 3:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone	
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation	
Note 5:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.	
Note 6:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].	

A.7.6.15.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report for each neighboring cell, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

10240 for UE supporting power class 1 and 5, or

6400 for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.7.6.15.2 SA event triggered reporting tests For FR2 with concurrent measurement gaps without SSB time index detection when DRX is not used (PCell in FR2)

A.7.6.15.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event for each neighbour cell. This test will partly verify the SA inter-frequency NR cell search requirements and collision handling between two partially-overlapping gaps in clause 9.1.8.

In this test, there are three cells: NR cell 1 as PCell in FR2 on NR RF channel 1, NR cell 2 as neighbour cell in FR2 on NR RF channel 2 and NR cell 3 as another neighbour cell in FR2 on NR RF channel 3. The test parameters and configurations are given in Tables A.7.6.15.2.1-1, A.7.6.15.2.1-2, and A.7.6.15.2.1-3.

Two measurement gaps are configured to UE with measurement gap pattern configuration #13 and #14 respectively. Measurement gap with pattern #13 is associated with inter-frequency measurement on NR cell 2, and measurement gap with pattern #14 is associated with inter-frequency measurement on NR cell 3. Measurement gap pattern configuration # 13 and #14 as defined in Table A.7.6.15.2.1-2 are provided to for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3.

Supported test configurations are shown in table A.7.6.15.2.1-1.

Table A.7.6.15.2.1-1 SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
--------	-------------

1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.7.6.15.2.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 concurrent gap with partially partial overlapping scenario for SSB-based measurements without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2, 3	Three FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
1 st Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
2 nd Neighbour cell		Config 1	NR cell 3	NR cell 3 is on NR RF channel number 3.
1 st Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
2 nd Gap Pattern Id		Config 1	14	As specified in clause 9.1.2-1.
1 st gap offset		Config 1	39	
2 nd gap offset		Config 1	4	
1 st gap priority		Config 1	2	Second level priority
2 nd gap priority		Config 1	1	Highest priority
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 and NR Cell 3 measurement objects
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3µs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	10.4 for PC1 and PC5; 6.5 for other PC	

Table A.7.6.15.2.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2		Cell 3	
			T1	T2	T1	T2	T1	T2
AoA setup		Config 1	Setup 3 as specified in clause A.3.15					
			AoA1		AoA2		AoA3	
Beam Assumption ^{Note 7}		1,2	Rough		Rough		Rough	
NR RF Channel Number		Config 1	1		2		3	
Duplex mode		Config 1	TDD		TDD		TDD	
TDD configuration		Config 1	TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		Config 1	66		66		66	
BWP BW	MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66		100: N _{RB,c} = 66	

BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A		N/A	
	Initial UL BWP			ULBWP.0.1		N/A		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-		-	
SMTC configuration defined in A.3.11.1 and A.3.11.7			Config 1	SMTC.1		SMTC.1		SMTC.7	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0		0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
$\hat{E}_s$	dBm/SCS		Config 1	-87	-87	-Infinity	-87	-Infinity	-87
SSBRP ^{Note 3}	dBm/SCS ^{Note5}		Config 1	-87	-87	-Infinity	-87	-Infinity	-87
$\hat{E}_s / I_{ot_BB}$ ^{Note 8}	dB		Config 1	1.89	1.89	-Infinity	1.89	-Infinity	1.89
I_{o} ^{Note3}	dBm/95.04 MHz ^{Note5}		Config 1	-58.01	-58.01	-Infinity	-58.01	-Infinity	-58.01
Propagation Condition			Config 1	No external noise (Note 9)				No external noise (Note 9)	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Void
Note 3:	SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 9:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].

A.7.6.15.2.2 Test Requirements

For both NR cell 2 and NR cell 3, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

10240 for UE supporting power class 1 and 5, or

6400 for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.15.3 SA event triggered reporting tests for FR2 concurrent gap with partially partial overlapping scenario for SSB-based measurements and PRS-based measurement

A.7.6.15.3.1 Test Purpose and Environment

The purpose of this test is to verify that the concurrent gap capable UE makes correct reporting of events. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4 and PRS-RSRP measurement delay requirements specified in clause 9.9.3.5.

In this test, there are three cells: NR cell 1 as PCell in FR2 on NR RF channel 1, NR cell 2 as neighbour cell in FR2 on NR RF channel 2, and NR cell 3 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.7.6.15.3.1-1, A.7.6.15.3.1-2 and A.7.6.15.3.1-3.

Two measurement gap patterns (MeasGapId #0 and MeasGapId #1) are configured with the gap pattern ID #0 and #1 as defined in Table A.7.6.15.3.1-2. MeasGapId #1 is configured with a higher priority than MeasGapId #0. MeasGapId #0 and MeasGapId #1 are associated with the MOs for RF channel numbers #1 and #2, respectively.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used for carrier 2. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3. Cell 1 and cell 3 transmit PRS during T2.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first MG instance of MeasGapId #1 containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

Table A.7.6.15.3.1-1: SA event triggered reporting tests for FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.6.15.3.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 concurrent gap with partially partial overlapping scenario for SSB-based measurements and PRS measurement

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 3 2: Cell 2	Two TDD carrier frequencies are used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2, NR cell 3	Cell 2 is an inter-frequency cell neighbor cell Cell 3 is a neighbour cell in the positioning assistance data.
Gap Pattern Id		Config 1	0 for MeasGapId #0 1 for MeasGapId #1	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	7 for MeasGapId #0 11 for MeasGapId #1	
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between cell 1 and neighbour cell 2		Config 1	3 μ s	Synchronous cells.
Time offset between cell 1 and neighbour cell 3		Config 1	3 μ s	Synchronous cells.
Expected RSTD between cell 1 and cell 3	μ s	Config 1	3	
Expected RSTD uncertainty between cell 1 and cell 3	μ s	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	11	

Table A.7.6.15.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 concurrent gap with partially-partial overlapping scenario for SSB-based measurements and PRS measurement

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15					
Beam Assumption ^{Note 7}			Config 1	Rough		Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD		TDD	
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A			
	Initial UL BWP			ULBWP.0.1		N/A			
	Dedicated DL BWP			DLBWP.1.1		N/A			
	Dedicated UL BWP			ULBWP.1.1		N/A			
OCNG Patterns			Config 1	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-		-	
TRS configuration			Config 1	TRS.2.1 TDD		-		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120		120	
SSB parameters			Config 1	SSB.1 FR2		SSB.1 FR2		SSB.1 FR2	
SMTC configuration defined in A.3.11			Config 1	SMTC.1		SMTC.4		SMTC.1	
PRS configuration			Config 1	PRS.1.1 FR2		N/A		PRS.1.2 FR2	
PRS muting configuration			Config 1	'10'		N/A		'01'	
EPRE ratio of PSS to SSS			Config 1	0		0		0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} ^{Note2}		dBm/15kHz Note5		-102		-104.7		-102	
N_{oc} ^{Note2}		dBm/SCS Note4	Config 1	-93		-95.7		-93	
SSB_-RP ^{Note 3}		dBm/SCS Note5	Config 1	-89.7	-89.7	- Infinity	-86.7	-Infinity	-86.7

SSB $\hat{E}_s/N_{oc}$	dB	Config 1	3.3	3.3	-Infinity	9.0	-Infinity	6.3
PRS-RSRP ^{Note 3}	dBm/SCS Note5	Config 1	-Infinity	-96	N/A	N/A	-Infinity	-103
PRS $\hat{E}_s/I_{ot}$	dB	Config 1	-Infinity	-3	N/A	N/A	-Infinity	-10
PRS $\hat{E}_s/N_{oc}$	dB	Config 1	-Infinity	-3	N/A	N/A	-Infinity	-10
I_o ^{Note3}	dBm/95.04 MHz Note5	Config 1	-59.05	-55.32	-66.7	-57.2	-59.05	-55.32
Propagation Condition		Config 1	AWGN					
Note 1: OCNG shall be used such that active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP/PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. I_o values were derived for symbols without PRS. Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation								

A.7.6.15.3.2 Test Requirements

The UE shall send one Event A3 triggered measurement report for cell 2, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

10240 for UE supporting power class 1 and 5, or

6400 for UE supporting other power class.

The PRS RSRP measurement time fulfils the requirements specified in Clause 9.9.3.5. The UE shall perform and report the PRS RSRP measurements for Cell 3 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 9.9.3.5 starting from the beginning of time interval T2.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRP measurement for each correct event shall be within the PRS RSRP reporting range specified in Clause 10.1.24.3, i.e., between PRS RSRP_0 and PRS RSRP_126.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

IUE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.16 SA event triggered reporting tests with NCSG

A.7.6.16.1 SA event triggered reporting test with per-UE NCSG under non-DRX

A.7.6.16.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2.7.1 and 9.2.7.2, and also verify the scheduling availability during intra-frequency measurement with NCSG in clause 9.2.7.3. Supported test configurations are shown in table A.7.6.16.1.1-1.

The serving frequency should be selected for which UE reports ‘ncsg’.

Table A.7.6.16.1.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.16.1.1-2 ~ 4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

During T2, the UE is continuously scheduled with data on the PCell.

The UE is capable of NCSG and report ‘ncsg’ through *NeedForGapNCSG-InfoNR* for PCell.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.7.6.16.1.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE NCSG without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
NCSG type		1, 2	Per-UE	
NCSG pattern		1, 2	13	
NCSG repetition periodicity	ms	1, 2	40	
ML	ms	1, 2	5	
NCSG offset	ms	1, 2	39	
SMTC configuration		1, 2	SMTC.1	
CSI-RS parameters		1, 2	CSI-RS.3.2 TDD	
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μ s	Synchronous cells

T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.7.6.16.1.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE NCSG without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1	24		24	
		2	48		48	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2	CSI-RS		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
		2	CR.3.2 TDD		CR.3.2 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
		2	CCR.3.7 TDD		CCR.3.7 TDD	
TRS configuration		1, 2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120		120	
OCNG Patterns		1, 2	OP.5		N/A	
cellIndividualOffset	dB	1~2	N/A		16	
SSB		1	SSB.3 FR2		SSB.7 FR2	
		2	SSB.4 FR2		SSB.8 FR2	
Propagation Condition		1, 2	No external noise (Note 1)		No external noise (Note 1)	
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].						

Table A.7.6.16.1.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE NCSG without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.3.15.3			
Beam Assumption ^{Note 4}		1,2	AoA1		AoA2	
			Rough		Rough	
E _s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
$\hat{E}_s / I_{ot}$ BB Note 5	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB _{RP}	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
I _o	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-61.41	-61.41	-Infinity	-61.41

Time multiplexing of the downlink transmissions from each AoA	1	Defined in Figure A.7.6.16.1.1-1
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.	
Note 2:	Void	
Note 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.	
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation	
Note 5:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.	

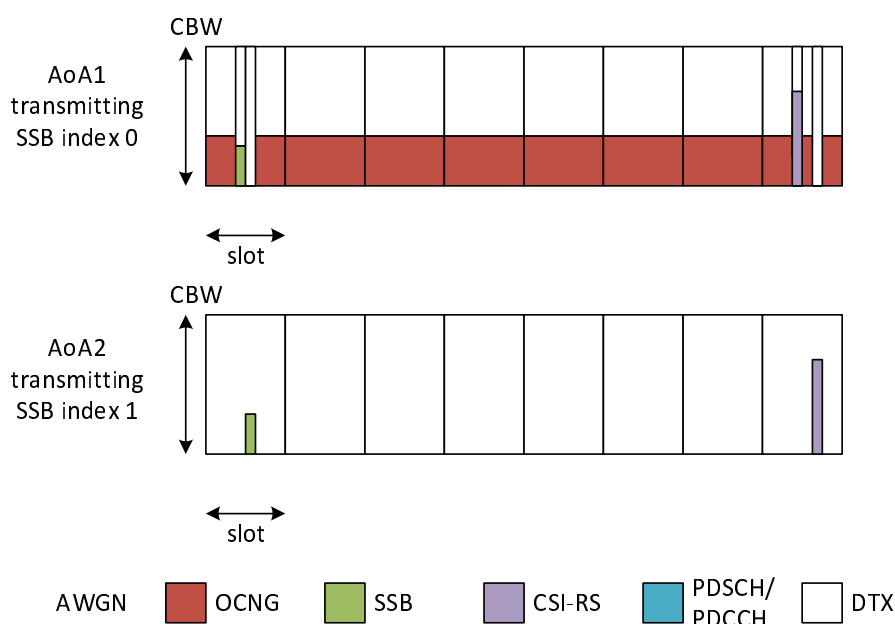


Figure A.7.6.16.1.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.7.6.16.1.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 3.2s for a UE supporting power class 1 and 5,
- 1.92s for a UE supporting power class 2, 3 and 4

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

During T2, UE shall send HARQ ACK/NACK for the corresponding PDSCH scheduled in PCell in all the slots except for the case where PDSCH or PUCCH is overlapped with the VIL of NCSG pattern.

NOTE: The actual overall delays measured in the test may be up to $2 \times \text{TTIDCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.6.16.2 SA event triggered reporting tests on inter-frequency measurement with NCSG for FR2 when DRX is not used (PCell in FR2)

A.7.6.16.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.10. The test will partly verify the interruption requirements on PCell in clause 9.1.9.1.

The serving frequency and the target frequency should be selected such that UE reports 'ncsg' for the target frequency given the serving frequency.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.7.6.16.2.1-1, A.7.6.16.2.1-2, and A.7.6.16.2.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.7.6.16.2.1-1.

Table A.7.6.16.2.1-1 SA event triggered reporting tests with NCSG without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1:	Void.

Table A.7.6.16.2.1-2: General test parameters for SA inter-frequency event triggered reporting with NCSG for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
NCSG Pattern Id		Config 1	0	As specified in clause 9.1.9.3-1.
NCSG offset		Config 1	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	

Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3µs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	5.2 for PC1 and PC5; 3.5 for other PC	

Table A.7.6.16.2.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting with NCSG for FR2 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption ^{Note 7}			1,2	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns			Config 1	OP.2		OP.2	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							

EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz Note5		-104.7		-104.7	
N_{oc} ^{Note2}	dBm/S CS Note4	Config 1	-95.7		-95.7	
$\hat{E}_s/N_{oc}$	dB	Config 1	6	6	-Infinity	9
SSB_RP ^{Note 3}	dBm/S CS ^{Note5}	Config 1	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s/I_{ot\ BB}$ ^{Note 8}	dB	Config 1	6	6	-Infinity	9
I_o ^{Note3}	dBm/95.04 MHz Note5	Config 1	-59.74	-59.74	-66.7	-57.2
Propagation Condition		Config 1	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void						
Note 3: SSB_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Void						
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 8: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _s from TS 38.101-2 [19] Table 6.2.1.3-4.						

A.7.6.16.2.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1 and 5, or

3200 for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall be scheduled on PCell continuously throughout the test. During the time duration T2, the interruption on PCell shall not be more than the values specified for SA in clause 9.1.9.1.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE: For a UE that supports per-FR NCSG, it only needs to pass test case with per-FR NCSG, otherwise, it only needs to pass test case with per-UE NCSG.

A.7.6.16.3 Event triggered reporting test on deactivated SCell measurement via NCSG in FR2 in non-DRX

A.7.6.16.3.1 Test Purpose and Environment

The purpose of this test is to verify that the delay and interruption requirements for deactivated SCell measurement stated in clause 9.2.7 and 8.2 respectively, when both PCell and SCell are in FR2.

The supported test configurations are shown in Table A.7.6.16.3.1-1 below. The general test parameters are defined in Table A.7.6.16.3.1-2. Three cells are deployed in the test, which are one FR2 PCell (Cell 1) on frequency 1 and one FR2 SCell (Cell 2) on frequency 2 and one neighboring cell (Cell3) on frequency 2. The cell-specific test parameters are given in A.7.6.16.3.1-3 below. OTA related test parameters are shown in table A.7.6.16.3.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A6 is used. The test consists of 2 successive time periods, with duration of T1 and T2, respectively.

Before the test starts the UE is connected to PCell (Cell 1) but is not aware of SCell (Cell 2) nor the neighboring cell (Cell 3). The UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the deactivated SCC.

NCSG is configured with the NCSG pattern ID #0 as defined in Table A.7.6.16.3.1-2.

Table A.7.6.16.3.1-1: Supported test configurations for FR2 deactivated SCell measurement via NCSG

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note 1: Same configuration applies to both PCell and SCell	

Table A.7.6.16.3.1-2: General test parameters for FR2 deactivated SCell measurement via NCSG

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR radio channels are used for this test. Cell 1 uses RF channel 1. Cell 2 and Cell 3 use RF channel 2.
Hysteresis	dB	0	
A6-Offset	dBm	-11	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	DRX is not used
NCSG Pattern Id		0	As specified in clause Table 9.1.9.3-1.
NCSG offset	ms	39	
NCSG mgta	ms	0	
Time offset between Cell 2 and Cell 3	us	3	Synchronous cells
SCell measurement cycle (measCycleSCell)	ms	160	
T1	s	5	
T2	s	15	

Table A.7.6.16.3.1-3: Cell specific test parameters for FR2 deactivated SCell measurement via NCSG

Parameter ^{Note 5}	Unit	Cell 1	Cell 2	Cell 3
SSB ARFCN		freq1	freq2	freq2
Duplex mode		TDD		
TDD configuration		TDDConf.3.1		
Downlink initial BWP Configuration		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
Downlink dedicated BWP Configuration		DLBWP.1.1	DLBWP.1.1	DLBWP.1.1
Uplink initial BWP configuration		ULBWP.0.1	ULBWP.0.1	ULBWP.0.1
Uplink dedicated BWP configuration		ULBWP.1.1	ULBWP.1.1	ULBWP.1.1
TRS configuration		TRS.2.1 TDD	TRS.2.1 TDD	N/A
TCI state		TCI.State.0	TCI.State.0	N/A
BW _{channel}	MHz	100: N _{RB,C} = 66		
Data RBs allocated		24	24	24
PDSCH Reference measurement channel		SR.3.2 TDD	SR.3.2 TDD	N/A
RMSI CORESET Parameters		CR.3.1 TDD	-	N/A
Dedicated CORESET Parameters		CCR.3.1 TDD	CCR.3.1 TDD	N/A
OCNG Patterns		OP.1	OP.5	N/A
SSB Configuration		SSB.1 FR2	SSB.3 FR2	SSB.7 FR2
SMTc Configuration		SMTc.1	SMTc.1	
cellIndividualOffset		N/A	N/A	16
EPRE ratio of PSS to SSS	dB	0		
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Propagation conditions		No external noise (Note 2)		
Note 1: OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

Table A.7.6.16.3.1-4: OTA related test parameters for FR2 deactivated SCell measurement via NCSG

Parameter	Unit	Cell 1		Cell 2		Cell 3	
		T1	T2	T1	T2	T1	T2
Angle of arrival configuration		Setup 3 defined in A.3.15.3					
		AoA1		AoA1		AoA2	
Assumption for UE beams ^{Note 3}		Rough		Rough		Rough	
E _s	dB	-89		-89	-89	-infinity	-89
SSB RP ^{Note2}	dBm/SCS ^{Note4}	-89		-89	-89	-infinity	-89
$\hat{E}_s / I_{ot}$ BB ^{Note 4}	dB	-0.12		-0.12	-0.12	-infinity	-0.12
I _o ^{Note2}	dBm/95.04 MHz ^{Note4}	-64.41		-64.41	-64.41	--infinity	-64.41
Time multiplexing of the downlink transmissions from each AoA		N/A		Defined in Figure A.7.6.1.1.1-1			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 4:	Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4

A.7.6.16.3.2 Test Requirements

UE shall send one Event A6 triggered measurement report, with a measurement reporting delay less than X_1 ms from the beginning of time period T2, where X_1 is

12.8s for UE supporting power class 1 and 5, or

7.68s for UE supporting other power class.

UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

During the T1 and T2, UE be able to report ACK/NACK for all slots with PDCCH/PDSCH on PCell excluding those slots overlapped with

VIL1, ML and VIL2 of NCSG for intra-band FR2 CA

VIL1 and VIL2 of NCSG for inter-band FR2 CA

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.7.7 Measurement Performance requirements

Unless explicitly stated otherwise:

- Reported measurements shall be within defined range of accuracy limits defined in Clause 10 for at least 90 % of the reported cases. If multiple measurement performance requirements are verified in the same test, the reported measurements for each requirement shall be within defined range of accuracy limits of the corresponding requirement defined in Clause 10 for at least 90% of the reported cases.
- Measurements are performed in RRC_CONNECTED state.
- The reference channels assume transmission of PDSCH with a maximum number of 5 HARQ transmissions unless otherwise specified.

A.7.7.1 SS-RSRP

A.7.7.1.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.3.1.1 and 10.1.3.1.2 for intra-frequency measurements.

A.7.7.1.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in Table A.7.7.1.1.2-2 and A.7.7.1.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1. The test consists of two time phases T1 and T2.

Table A.7.7.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.1.1.2-2: SS-RSRP Intra frequency general test parameters

Parameter	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
Cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,C} = 66		100: N _{RB,C} = 66	
Data RBs allocated		24		24	
Downlink initial BWP configuration		DLB WP.0. 1	-	DLB WP.0. 1	-
Downlink dedicated BWP configuration		DLB WP.1. 1	-	DLB WP.1. 1	-
Uplink initial BWP configuration		ULB WP.0. 1	-	ULB WP.0. 1	-
Uplink dedicated BWP configuration		ULB WP.1. 1	-	ULB WP.1. 1	-
DRX cycle configuration		Not applic able	-	Not applic able	-
TRS configuration		TRS.2 .1 TDD	-	TRS.2 .1 TDD	-
TCI state		TCI.St ate.0	-	TCI.St ate.0	-
PDSCH Reference measurement channel		SR.3. 2TDD	-	SR.3. 2 TDD	-
RMSI CORESET Reference Channel		CR.3. 1 TDD	-	CR.3. 1 TDD	-
Dedicated CORESET Reference channel		CCR. 3.1 TDD	-	CCR. 3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTTC configuration		SMTTC .1	SMTTC .1	SMTTC .1	SMTTC .1

Time offset with Cell 1	μs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Propagation conditions		AWG N	AWG N	AWG N	AWG N
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void Note 5: Void					

Table A.7.7.1.1.2-3: SS-RSRP Intra frequency OTA related test parameters

Parameter	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 7}		Rough		Rough	
N_{OC} ^{Note1}	dBm/15kHz _{^{Note4}}	-91.6		N/A	
N_{OC} ^{Note1}	dBm/SCS _{^{Note4}}	-82.6		N/A	
$\hat{E}_s / N_{OC}$	dB	6.0	1.0	N/A	N/A
E_s	dBm/SCS _{^{Note4}}			(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
SSB_RP ^{Note2}	dBm/SCS	-76.6	-81.6	(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
$\hat{E}_s / I_{ot_BB}$ ^{Note6}	dB	2.44	-5.98	-5.98	-5.98
I_0 ^{Note2}	dBm/95.04 MHz _{^{Note4}}	-50.05		(Table B.2.2-2 Rx Beam Peak +29.70dB)	

Note 1:	Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SSB_RP, Es/lot and lo levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Void
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	Void
Note 6:	Calculation of Es/lot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.1.1.3 Test Requirements

The SS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.3.1.1 and relative accuracy requirements in clause 10.1.3.1.2. The following requirements are to be verified:

During T1:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table A.7.7.1.1.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

During T2:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table A.7.7.1.1.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

During T1 and T2:

Relative accuracy of Cell 1 during T2 compared with Cell 1 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1

Relative accuracy of Cell 2 during T2 compared with Cell 2 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1.3.1.2-1.

Table A.7.7.1.1.3-1: SS-RSRP absolute accuracy test requirement

	Test requirement Notes 1,2,3
Cell 1	$SSB_RP1 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP1 + \delta + G_{max}$
Cell 2	$SSB_RP2 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP2 + \delta + G_{max}$
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.3.1.1-1, selected according to the lo used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.7.7.1.2 SA inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.5.1.1 and 10.1.5.1.2 for intrer-frequency measurements with the testing configurations for NR cells in Table A.7.7.1.2.1-1.

Table A.7.7.1.2.1-1: Applicable NR configurations for FR2 inter-frequency SS-RSRP accuracy test

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

A.7.7.1.2.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.7.1.2.2-1 and Table A.7.7.1.2.2-2 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.7.7.1.2.2-1 and Table A.7.7.1.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.7.7.1.2.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~2		freq1	freq2	freq1	freq2
BW _{channel}	1~2		100: NRB _c = 66		100: NRB _c = 66	
Data RBs allocated	1		24		24	
	2		48		48	
Gap pattern ID			0		0	
Duplex mode	1~2		TDD		TDD	
TDD configuration	1~2		TDDConf.3.1		TDDConf.3.1	
PDSCH Reference measurement channel	1		SR.3.2 TDD	-	SR.3.2 TDD	-
	2		SR.3.3 TDD		SR.3.3 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	-	CR.3.1 TDD	-
	2		CR.3.2 TDD		CR.3.2 TDD	
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	-	CCR.3.1 TDD	-
	2		CCR.3.7 TDD		CCR.3.7 TDD	
SSB configuration	1		SSB.3 FR2		SSB.3 FR2	
	2		SSB.4 FR2		SSB.4 FR2	
PDSCH/PDCCH subcarrier spacing	1~2	kHz	120		120	
OCNG Patterns	1~2		OP.3		OP.3	
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration	1~2		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2		TCI.State.2	
SMTC configuration	1~2		SMTC.1		SMTC.1	
Time offset between Cell 2 and Cell 1	1~2	µs	3		3	
EPRE ratio of PSS to SSS	1~2	dB	0	0	0	0

EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
Propagation condition	1~2	-	AWGN	AWGN	AWGN	AWGN
Antenna configuration	1~2	-	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void.						

Table A.7.7.1.2.2-2: SS-RSRP inter frequency OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration	1~2		Setup 4b according to clause A.3.15.4.2		Setup 4b according to clause A.3.15.4.2	
			AoA1 Spherical coverage	AoA2 Rx Beam Peak	AoA1 Spherical coverage	AoA2 Rx Beam Peak
Assumption for UE beams ^{Note 7}	1~2		Rough		Rough	
N_{oc} ^{Note1}	1	dBm/15kHz ^{Note4}	-90.6	-90.6	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +1.97dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} -3.03dB)
	2		-93.7	-93.7		
N_{oc} ^{Note1}	1	dBm/SCS ^{Note4}	-81.6	-81.6	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +11.0dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +6.0dB)
	2		-81.7	-81.7	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +14.0dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +9.0dB)
$\hat{E}_s / N_{oc}$	1~2	dB	6.0	6.0	17.0	-1.0
SSB_RP ^{Note2}	1	dBm/SCS	-75.6	-75.6	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +28.0dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +5.0dB)
	2		-75.7	-75.7	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +31.0dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +8.0dB)
(SSB_RP _{Cell 1} – SSB_RP _{Cell 2})	1~2	dB	0		23.00	

$\hat{E}_s/I_{ot\ BB}^{Note6}$	1	dB	5.26	5.96	9.53	-3.46
	2		4.61	5.91		
I_o^{Note2}	1	dBm/95.04 MHz ^{Note4}	-50.00	-50.00	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +52.68dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +33.13dB)
	2		-50.09	-50.09	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +55.69dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +36.14dB)
$(I_{ofreq\ 1} - I_{ofreq\ 2})$	1~2	dB	0		19.55	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB_RP, E_s/I_{ot}, I_o, $(SSB_RP_{Cell\ 2} - SSB_RP_{Cell\ 1})$ and $(I_{ofreq\ 2} - I_{ofreq\ 1})$ levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: Void Note 6: Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P or ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4. Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 8: The value in Table B.2.3-2 is the Minimum SSB_RP for $SCS_{SSB} = 120$ kHz, selected according to the operating band of Cell 2 and UE power class, without $\Delta MB_{P,n}$ adjustment.						

A.7.7.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirements in clause 10.1.5.1.1 and the relative requirements in clause 10.1.5.1.2.

Test 1:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.7.7.1.2.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in A.7.7.1.2.3-2.

Test 2:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.7.7.1.2.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in A.7.7.1.2.3-2.

Table A.7.7.1.2.3-1: SS-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3,4}
Cell 1	$SSB_RP1 - \delta + G_{min} + X \leq \text{Reported RSRP(dBm)} \leq SSB_RP1 + \delta + G_{max}$

Cell 2	$SSB_RP2 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP2 + \delta + G_{max}$
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.5.1.1-1, selected according to the I_o used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.

Table A.7.7.1.2.3-2: SS-RSRP relative accuracy test requirement

	Test requirement Notes 1,2,3,4, 5, 6, 7
Cell 2 – Cell 1	$SSB_RP2 - SSB_RP1 - \delta - D - G_{inter} \leq \text{Reported RSRP(dB)} \leq SSB_RP2 - SSB_RP1 + \delta + G_{inter} - (X) + E$
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP relative accuracy requirement from Table 10.1.5.1.2-1
Note 3:	Void
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.
Note 5:	D is the margin due to mis-alignment between fine beam and rough beam. D is the Rough Beam gain reduction in Rx beam peak direction from Table B.2.1.5.3-1, selected according to the UE power class. D is always a positive value.
Note 6:	G_{inter} is the margin due to different antenna gain caused by frequency separation. G_{inter} is from Table B.2.1.5.2-1, selected according to the UE power class, and is always a positive value
Note 7:	E = 3 (dB) is an additional margin to account for the actual gain difference between peak direction and spherical coverage using rough beams.

A.7.7.1.3 SA inter-frequency measurement accuracy with FR1 serving cell and FR2 target cell

A.7.7.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.5.1.1 for inter-frequency measurements with the testing configurations in Table A.7.7.1.3.1-1.

Table A.7.7.1.3.1-1: Applicable NR configurations for FR2 inter-frequency SS-RSRP accuracy test

Config	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	

A.7.7.1.3.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) in FR1 and Cell 2 in FR2. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.7.1.3.2-1 and Table A.7.7.1.3.2-2 below. Absolute accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.7.7.1.3.2-1 and Table A.7.7.1.3.2-2. The inter-frequency measurements are supported by a measurement gap.

Table A.7.7.1.3.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~3		freq1	freq2	freq1	freq2
BW _{channel}	1	MHz	10: N _{RB,c} = 52	100: N _{RB,c} = 66	10: N _{RB,c} = 52	100: N _{RB,c} = 66
	2		10: N _{RB,c} = 52		10: N _{RB,c} = 52	
	3		40: N _{RB,c} = 106		40: N _{RB,c} = 106	
Data RBs allocated	1,2		52	24	52	66
	3		106		106	
Duplex mode	1		FDD	TDD	FDD	TDD
	2		TDD		TDD	
	3		TDD		TDD	
TDD configuration	1		N/A	TDDConf. 3.1	N/A	TDDConf. 3.1
	2		TDDConf. 1.1		TDDConf. 1.1	
	3		TDDConf. 2.1		TDDConf. 2.1	
PDSCH Reference measurement channel	1		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 FDD		SR.2.1 FDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD		CR.1.1 TDD	
	3		CR.2.1 FDD		CR.2.1 FDD	
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD		CCR.1.1 TDD	
	3		CCR.2.1 TDD		CCR.2.1 TDD	
SSB configuration	1		SSB.1 FR1	SSB.3 FR2	SSB.1 FR1	SSB.3 FR2
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.2 FR1		SSB.2 FR1	
OCNG Patterns	1~3		OP.1	OP.3	OP.1	OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration	1~3		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration	1~3		TCI.State.2		TCI.State.2	
SMTC configuration	1~3		SMTC.1		SMTC.1	
Time offset between Cell 2 and Cell 1	1~3	μs	3		3	
EPRE ratio of PSS to SSS	1~3	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						

EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
Propagation condition	1~3	-	NA Link only, see clause A.3.7A	AWGN	NA Link only, see clause A.3.7A	AWGN
Antenna configuration	1~3	-		1x2		1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void						

Table A.7.7.1.3.2-2: SS-RSRP inter-frequency OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 ^{NOTE 3}	
			Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration according to clause A.3.15			NA	Setup 2b	NA	Setup 2b
Assumption for UE beams ^{Note 4}			N/A	Rough	N/A	Rough
N_{oc}	1~3	dBm/15 kHz	Link only, see clause A.3.7A	-90	Link only, see clause A.3.7A	NA
N_{oc}	1~3	dBm/SSB SCS				NA
$\hat{E}_s/N_{oc}$	1~3	dB		5		NA
E_s	1~3	dBm/SCS				(Table B.2.3-2 Spherical coverage +1dB)
SSB_RP ^{Note1}	1~3	dBm/SCS		-76.0		(Table B.2.3-2 Spherical coverage +1dB)
$\hat{E}_s/I_{otBB}$ ^{Note6}	1~3	dB		4.35		-3.81
I_o ^{Note1}	1~3	dBm/95.04M Hz		-50.18		SSB_RP +28.98
Note 1: E_s/I_{ot} , SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 2: Void						
Note 3: No additional noise is added by the test system in Test 2.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 5: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						

Note 6:	Calculation of $E_s/10\log_{10}B_B$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_S from TS 38.101-2 [19] Table 6.2.1.3-4.
---------	---

A.7.7.1.3.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 shall fulfil the Absolute requirement in clause 10.1.5.1.1.

Test 1:

Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.7.7.1.3.3.

Test 2:

Absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.7.7.1.3.3.

Table A.7.7.1.3.3: SS-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3,4}
Cell 2	$SSB_RP1 - \delta + G_{min} + X \leq \text{Reported RSRP(dBm)} \leq SSB_RP1 + \delta + G_{max}$
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.5.1.1-1, selected according to the I_o used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.

A.7.7.2 SS-RSRQ

A.7.7.2.1 SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.8.1.1.

A.7.7.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.2.1.2-1. . The absolute accuracy of SS-RSRQ intra-frequency measurement is test by using the parameters in Table A.7.7.2.1.2-2 and Table A.7.7.2.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell.

Table A.7.7.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2

Cell ID			489	0	489	0
SSB ARFCN			Freq1		Freq1	
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated			66		66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD		TRS.2.1 TDD	
TCI state			TCI.State .0		TCI.State.0	
PDSCH Reference measurement channel			SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	
Control channel RMC			CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns			OP.1	OP.1	OP.1	OP.1
SMTC configuration			SMTC.1			
SSB configuration			SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
PDSCH/PDCCH subcarrier spacing		kHz	120	120	120	120
SS-RSSI-Measurement			Not Applicable			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
Propagation condition			AWGN		AWGN	
Antenna configuration			1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void						
Note 3: Void						
Note 4: Void						
Note 5: Void.						

Table A.7.7.2.1.2-3: SS-RSRQ Intra frequency OTA related test parameters

	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1according to clause A.3.15.1	
Assumption for UE beams ^{Note 9}		Rough			
N_{OC} ^{Note1}	dBm/15kHz ^{Note 4}	-95		-95	
N_{OC} ^{Note1}	dBm/SCS ^{Note3}	-86		-86	
$\hat{E}_s / N_{oc}$	dB	3		3	
SSB RP ^{Note2}	dBm/SCS ^{Note4}	-83	-83	-89	-89

SS-RSRQ ^{Note2}	dB	-14.77	-14.77	-16.81	-16.81
$\hat{E}_s/I_{ot}$	dB	-1.76	-1.76	-4.76	-4.76
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-50		-54	
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: SS-RSRQ, SSB_RP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone					
Note 6: Void					
Note 7: Void					
Note 8: Void					
Note 9: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.7.2.1.3 Test Requirements

The SS-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal SS-RSRQ+2.5dB to Nominal SS-RSRQ-2.5dB and the SS-RSRQ measurement accuracy in test 2 shall be within the range Nominal RSRQ+3.5dB to Nominal RSRQ-3.5dB according to the requirements in clause 10.1.8.1.1. Nominal RSRQ is the value shown in table A.7.7.2.1.2-3.

A.7.7.2.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.7.7.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.9.1.1 and 10.1.9.1.2 for inter-frequency measurement.

A.7.7.2.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.7.7.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.7.7.2.2.2-2 and Table A.7.7.2.2.2-3. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A. 7.7.2.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.2.2.2-2: SS-RSRQ Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		Freq1	freq2	freq1	Freq2
SSB Configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	

BW _{channel}		MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state			TCI.State.0	-	TCI.State.0	-
Data RBs allocated			66		66	
PDSCH Reference measurement channel			SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns			OP.1	OP.1	OP.1	OP.1
SMTC configuration			SMTC.1	SMTC.1	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing		kHz	120	120	120	120
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
Propagation conditions			AWGN	AWGN	AWGN	AWGN
Antenna configuration			1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void						
Note 3: Void						
Note 4: Void						

Table A.7.7.2.2-3: SS-RSRQ Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
AoA setup		Setup 1 in clause A.3.15.		Setup 1 in clause A.3.15.	
Assumption for UE beams ^{Note 8}		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-94.03	-94.03	-94.03	-94.03
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-85.0	-85.0	-85.0	-85.0
$\hat{E}_s / N_{oc}$	dB	-1.75		-1.75	
SSB_RP ^{Note2}	dBm/SCS ^{Note4}	-86.75	-86.75	-88	-88
SS-RSRQ ^{Note2}	dB	-14.75	-14.75	-15.56	-15.56
$\hat{E}_s / I_{ot}$	dB	-1.75	-1.75	-3	-3
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-53.8	-53.8	-54.25	-54.25
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					

Note 2:	SS-RSRQ, SSB_RP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	Void
Note 7:	Void
Note 8:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.2.2.3 Test Requirements

The SS-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal SS-RSRQ+2.5dB to Nominal SS-RSRQ -2.5dB and the SS-RSRQ measurement accuracy in test 2 shall be within the range Nominal SS-RSRQ +3.5dB to Nominal SS-RSRQ -3.5dB according to the requirements in clause 10.1.10.1.1.

The SS-RSRQ relative measurement accuracy shall fulfil the requirements in clause 10.1.10.1.2.

A.7.7.3 SS-SINR

A.7.7.3.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.13.1.1.

A.7.7.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is test by using the parameters in Table A.7.7.3.1.2-2 and Table A.7.7.3.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Cell ID		489	0	489	0
SSB ARFCN		Freq2		Freq2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		66		66	
Downlink initial BWP configuration		DLBWP.0.1			
Downlink dedicated BWP configuration		DLBWP.1.1			
Uplink initial BWP configuration		ULBWP.0.1			
Uplink dedicated BWP configuration		ULBWP.1.1			
DRX cycle configuration	ms	Not applicable			
TRS configuration		TRS.2.1 TDD			
TCI state		TCI.State.0			

PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	
Dedicated RMSI CORESET Reference Channel		CCR.3 .1 TDD	-	CCR.3. 1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
SS-RSSI-Measurement		Not Applicable			
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Propagation conditions		AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Void					
Note 3: Void					
Note 4: Void					

Table A.7.7.3.1.2-3: SS-SINR Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 9}		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-105		-105	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-96		-96	
$\hat{E}_s / N_{oc}$	dB	4.54		2.66	
SSB_RP ^{Note2}	dBm/SCS ^{Note4}	-91.46	-93.34	-99	-99
SS-SINR ^{Note2}	dB	0	-3.2	-4.76	-4.76
$\hat{E}_s / I_{ot}$	dB	0	-3.2	-4.76	-4.76
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-59.2		-64	
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2:	SS-SINR, SSB_RP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone				
Note 6:	Void				

Note 7:	Void
Note 8:	Void
Note 9:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.3.1.3 Test Requirements

The SS-SINR absolute measurement accuracy in test 1 shall be within the range Nominal SS-SINR+3B to Nominal SS-SINR -3dB and the SS-SINR measurement accuracy in test 2 shall be within the range Nominal SS-SINR +3.5dB to Nominal SS-SINR -3.5dB according to the requirements in clause 10.1.10.13.1.

A.7.7.3.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.7.7.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.15.1.1 and 10.1.15.1.2 for inter-frequency measurement.

A.7.7.3.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.7.7.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.7.7.3.2.2-2 and Table A.7.7.3.2.2-3. In all test cases, Cell 1 is the PCell and Cell 2 is target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.3.2.2-2: SS-SINR Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		66		66		66	
Downlink initial BWP configuration		DLBWP.0.1					
Downlink dedicated BWP configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
DRX cycle configuration	ms	Not applicable					
TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC. 1	SMTC. 1	SMTC. 1	SMTC. 1	SMTC. 1	SMTC. 1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120	120	120

EPRE ratio of PSS to SSS	dB	0	0	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG_DMRS to SSS ^{Note 1}							
EPRE ratio of OCNG to OCNG_DMRS ^{Note 1}							
Propagation conditions		AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Void							
Note 3: Void							
Note 4: Void							

Table A.7.7.3.2.2-3: SS-SINR Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration	degrees	Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 10}		Rough		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-105	-105	-105	-105	-105	-105
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-96	-96	-96	-96	-96	-96
$\hat{E}_s / N_{oc}$	dB	-0.5		-0.5		11.0	
SSB_RP ^{Note2}	dBm/SCS ^{Note4}	-96.5	-96.5	-85	-85	-99	-99
SS-SINR ^{Note2}	dB	-0.5	-0.5	11	11	-3.0	-3.0
$\hat{E}_s / I_{ot}$	dB	-0.5	-0.5	11	11	-3.0	-3.0
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-69.3	-69.3	-55.4	-55.4	-65.24	-65.24
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 2: SS-SINR, SSB_RP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 3: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone							
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone							
Note 6: Void							
Note 7: Void							
Note 8: Void							
Note 9: Void							
Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation							

A.7.7.3.2.3 Test Requirements

The SS-SINR absolute measurement accuracy in test 1 shall be within the range Nominal SS-SINR +3dB to Nominal SS-SINR -3dB and the SS-SINR measurement accuracy in test 2 shall be within the range Nominal SS-SINR +3.5dB to Nominal SS-SINR -3.5dB according to the requirements in clause 10.1.15.1.1.

The SS-SINR relative measurement accuracy shall fulfil the requirements in clause 10.1.15.1.2.

A.7.7.4 L1-RSRP measurement for beam reporting

A.7.7.4.1 SSB based L1-RSRP measurement

A.7.7.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 9.5.2 and clause 10.1.20.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.7.7.4.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.7.7.4.1.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.7.7.4.1.2 Test parameters

In this set of test cases there is one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.7.4.1.2-1 and Table A.7.7.4.1.2-2 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.7.7.4.1.2-1 and Table A.7.7.4.1.2-2.

Here is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.7.7.4.1.2-1: FR2 SSB based L1-RSRP general test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~2		freq1	freq1
Duplex mode	1~2		TDD	TDD
TDD Configuration	1~2		TDDConf.3.1	TDDConf.3.1
BW _{channel}	1~2	MHz	100: N _{RB,c} = 66	100: N _{RB,c} = 66
Data RBs allocated	1~2		66	66
PDSCH Reference measurement channel	1		SR.3.2 TDD	SR.3.2 TDD
	2		SR.3.3 TDD	SR.3.3 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD	CR.3.1 TDD
	2		CR.3.2 TDD	CR.3.2 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	CCR.3.1 TDD
	2		CCR.3.7 TDD	CCR.3.7 TDD
SSB configuration	1		SSB.1 FR2	SSB.1 FR2
	2		SSB.2 FR2	SSB.2 FR2
OCNG Patterns	1~2		OP.1	OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3

TRS Configuration	1~2		TRS.2.1 TDD	TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2	TCI.State.2
SMTC configuration	1~2		SMTC.1	SMTC.1
reportConfigType	1~2		periodic	periodic
reportQuantity	1~2		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1~2		2	2
L1-RSRP reporting period	1~2		slot320	slot320
Propagation condition	1~2		AWGN	AWGN
Antenna configuration	1~2		1x2	1x2
EPRE ratio of PSS to SSS	1~2	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled				

Table A.7.7.4.1.2-2: FR2 SSB based L1-RSRP OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 ^{NOTE 3}	
			SSB0	SSB1	SSB0	SSB1
Angle of arrival configuration			Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 4}			Rough		Rough	
N_{oc}	1~2	dBm/15 kHz	-100		n.a.	
N_{oc}	1	dBm/SS B SCS	-91		n.a.	
	2		-88		n.a.	
$\hat{E}_s/I_{ot}$	1~2	dB	10	-2	n.a.	
SSB_RP ^{Note1}	1	dBm/SC S	-81	-93	As in Table B.2.4-2	
	2		-78	-90	As in Table B.2.4-2	
I_o ^{Note1}	1~2	dBm/95.04M Hz	-51.57		SSB_RP+28.98	
$\hat{E}_s/N_{oc}$	1~2	dB	10	-2	n.a.	
Note 1: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 2: Void						
Note 3: No additional noise is added by the test system in Test 2.						

Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
---------	--

A.7.7.4.1.3 Test Requirements

After 320ms from the beginning of the test, the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 1 shall fulfil the requirements in clauses 10.1.20.1. The following requirements are to be verified:

For Test 1:

Absolute accuracy of SSB0. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.7.4.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.1.2-1.

For Test 2:

Absolute accuracy of SSB resource reported by UE in L1-RSRP report (SSB0 or SSB1). The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.7.4.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.1.2-1.

Table A.7.7.4.1.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
SSB0	$SSB_RP0 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP0 + \delta + G_{max}$
SSB1	$SSB_RP1 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP1 + \delta + G_{max}$
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the SSB n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.20.1.1-1, selected according to the I_o used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.7.7.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off

A.7.7.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 9.5.3 and clause 10.1.20.2 for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.7.7.4.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.7.7.4.2.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

A.7.7.4.2.2 Test parameters

In this set of test cases there are one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.7.4.2.2-1 and Table A.7.7.4.2.2-2 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.7.7.4.2.2-1 and Table A.7.7.4.2.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.7.7.4.2.2-1: FR2 CSI-RS based L1-RSRP general test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1		freq1	freq1
Duplex mode	1		TDD	TDD
TDD Configuration	1		TDDConf.3.1	TDDConf.3.1
BW _{channel}	1	MHz	100: N _{RB,c} = 66	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2	SSB.1 FR2
OCNG Patterns	1		OP.1	OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
TRS Configuration	1		TRS.2.1 TDD	TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2	TCI.State.2
SMTC configuration	1		SMTC.1	SMTC.1
CSI-RS	1		CSI-RS.3.2 TDD	CSI-RS.3.2 TDD
reportConfigType	1		periodic	periodic
reportQuantity	1		cri-RSRP	cri-RSRP
Number of reported RS	1		2	2
L1-RSRP reporting period	1		slot80	slot80
Propagation condition	1		AWGN	AWGN
Antenna configuration	1		1x2	1x2
EPRE ratio of PSS to SSS	1	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				

Table A.7.7.4.2.2-2: FR2 CSI-RS based L1-RSRP OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2 ^{NOTE 3}	
			CSI-RS0	CSI-RS1	CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 4}			Rough		Rough	
N_{oc}	1~2	dBm/15 kHz	-100		n.a.	
N_{oc}	1~2	dBm/SS B SCS	-91		n.a. n.a.	
$\hat{E}_s / I_{ot}$	1~2	dB	10	-2	n.a.	
CSI-RS-RSRP ^{Note1}	1~2	dBm/SC S	-81	-93	As in Table B.2.4-2	
I_o ^{Note1}	1~2	dBm/95.04M Hz	-59.86		SS-RSRP+28.98	
$\hat{E}_s / N_{oc}$	1~2	dB	-51.57	-2	n.a.	
Note 1: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 3: No additional noise is added by the test system in Test 2.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.7.4.2.3 Test Requirements

After 640ms from the beginning of the test, the L1-RSRP measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 1 shall fulfil the requirements in clause 10.1.20.2. The following requirements are to be verified:

For Test 1:

Absolute accuracy of CSI-RS0. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.7.4.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

For Test 2:

Absolute accuracy of CSI-RS resource reported by UE in L1-RSRP report (CSI-RS0 or CSI-RS1). The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.7.7.4.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.7.7.4.2.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
CSI-RS0	$\text{CSI-RS_RP0} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP0} + \delta + G_{\max}$
CSI-RS1	$\text{CSI-RS_RP1} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP1} + \delta + G_{\max}$
Note 1:	CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the I_o used in the test
Note 3:	$G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.7.7.5 CLI measurements

A.7.7.5.1 SA SRS-RSRP measurement accuracy with FR2 serving cell

A.7.7.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SRS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.22.1.1 with the testing configurations for NR cells in Table A.7.7.5.1.1-1.

Table A.7.7.5.1.1-1: Applicable NR configurations for FR2 SRS-RSRP accuracy test

Config	Description
1	120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.7.7.5.1.2 Test parameters

In this set of test cases there is one cell in the test, FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.7.5.1.2-1 and A.7.7.5.1.2-2 below. The test parameter for the (virtual) neighbor cell UE transmitting SRS are given in Table A.7.7.5.1.2-2.

Before the test UE is configured to perform SRS-RSRP measurement. During the test, the test system transmits SRS resources for measurement in the DL slots according to the SRS configuration in Table A.7.7.5.1.2-3. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on SRS symbol to be transmitted and on 2 data symbols before SRS to be transmitted.

Table A.7.7.5.1.2-1: FR2 test parameters for SRS-RSRP accuracy

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1		freq1	freq1
Duplex mode	1		TDD	TDD
TDD configuration	1		TDDConf.3.1	TDDConf.3.1
BW _{channel}	1	MHz	100: N _{RB,c} = 66	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1		SSB.3 FR2	SSB.3 FR2
OCNG Patterns	1		OP.1	OP.1
TRS configuration	1		TRS.2.1 TDD	TRS.2.1 TDD
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
SMTc configuration	1		SMTc.1	SMTc.1
Time offset between DL from serving cell and SRS from test system	1	μs	10.76	10.67
EPRE ratio of PSS to SSS	1	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				

EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Propagation condition	1		AWGN	AWGN
Antenna configuration	1		1x2	1x2
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.7.7.5.1.2-2: SRS-RSRP accuracy OTA related test parameters for PCell and Neighbour cell UE in FR2

Parameter	Unit	T1	T2
Angle of arrival configuration		Setup 1 defined A.3.15.1	Setup 1 defined A.3.15.1
Beam assumption ^{Note 5}		Fine	Fine
N_{oc} ^{Note1}	dBm/15kHz ^{Note3}	-100	N/A
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-91	N/A
$\hat{E}_s / N_{oc}$	dB	2	N/A
E_s	dBm/SCS ^{Note3}		(Table B.2.7-2 Rx Beam Peak)
SRS_RP ^{Note2}	dBm/SCS	-89	(Table B.2.7-2 Rx Beam Peak)
$\hat{E}_s / I_{ot\ BB}$ ^{Note4}	dB	>1	1
I_o ^{Note2}	dBm/95.04 MHz ^{Note3}	-57.89	(Table B.2.7-2 Rx Beam Peak +50.79dB)
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SRS_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 4: Calculation of $E_s/I_{ot\ BB}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 2dB for UE multi-band relaxation factor $\sum MB_P$ from TS 38.101-2 [19] Table 6.2.1.3-4. Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.			

Table A.7.7.5.1.2-3: SRS configuration parameters for FR2 SRS-RSRP accuracy

	Field	SRSCnf.1
SRS-ResourceSet	srs-ResourceSetId	0
	srs-ResourceIdList	0
	resourceType	Periodic

	Usage	Codebook
SRS-Resource	SRS-ResourceId	0
	nrofSRS-Ports	Port1
	transmissionComb	n2
	combOffset-n2	0
	cyclicShift-n2	0
	resourceMapping startPosition	0
	resourceMapping nrofSymbols	n1
	resourceMapping repetitionFactor	n1
	freqDomainPosition	0
	freqDomainShift	0
	freqHopping c-SRS	12
	freqHopping b-SRS	0
	freqHopping b-hop	0
	groupOrSequenceHopping	Neither
	resourceType	Periodic
	periodicityAndOffset-p	sl160,25
	sequenceId	0

A.7.7.5.1.3 Test Requirements

The SRS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.22.1.1. The following requirements are to be verified:

During T1:

The UE is deemed to meet the requirement if the reported SRS-RSRP is in the range shown in table A.7.7.5.1.3-1.

During T2:

The UE is deemed to meet the requirement if the reported SRS-RSRP is in the range shown in table A.7.7.5.1.3-1.

Table A.7.7.5.1.3-1: SRS-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
SRS	$\text{SRS_RP} - \delta + G_{\min} \leq \text{Reported SRS-RSRP(dBm)} \leq \text{SRS_RP} + \delta + G_{\max}$
Note 1:	SRS_RP is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.22.1.1-2, selected according to the I_o used in the test
Note 3:	$G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.7.7.5.2 SA CLI-RSSI measurement accuracy with FR2 serving cell

A.7.7.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CLI-RSSI measurement accuracy is within the specified limits. This test will verify the requirements in Clauses 10.1.22.2.1 with the testing configurations for NR cells in Table A.7.7.5.2.1-1.

Table A.7.7.5.2.1-1: Applicable NR configurations for FR2 CLI-RSSI accuracy test

Config	Description
1	120 kHz SRS SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.7.7.5.2.2 Test parameters

In this set of test cases there is one cell in the test, FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.7.5.2.2-1 and A.7.7.5.2.2-2 below.

Before the test UE is configured to perform CLI-RSSI measurement. There is no measurement gap configured in the test. During the test, the test system does not transmit PDCCH/PDSCH/OCNG on symbols for CLI-RSSI resource and on 2 data symbol before. The CLI-RSSI measurement resource configuration is in Table A.7.7.5.2.2-3.

Table A.7.7.5.2.2-1: FR2 test parameters for CLI-RSSI accuracy

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1		freq1	freq1
Duplex mode	1		TDD	TDD
TDD configuration	1		TDDConf.3.1	TDDConf.3.1
BW _{channel}	1	MHz	100: N _{RB,c} = 66	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD	SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD	CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	CCR.3.1 TDD
SSB configuration	1		SSB.3 FR2	SSB.3 FR2
OCNG Patterns ^{Note2}	1		OP.1	OP.1
TRS configuration	1		TRS.2.1 TDD	TRS.2.1 TDD
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
SMTC configuration	1		SMTC.1	SMTC.1
Time offset between DL from serving cell and OCNG from test system	1	μs	10.67	10.67
EPRE ratio of PSS to SSS	1	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Propagation condition	1		AWGN	AWGN
Antenna configuration	1		1x2	1x2

- Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: OCNG is not transmitted in the CLI-RSSI measurement resources.

Table A.7.7.5.2.2-2: CLI-RSSI accuracy OTA related test parameters

Parameter	Unit	T1	T2
Angle of arrival configuration		Setup 1 defined A.3.15.1	
Beam assumption ^{Note 5}		Fine	
N_{oc} on CLI-RSSI measurement resource ^{Note1}	dBm/15kHz _{z^{Note3}}	-100	
N_{oc} on CLI-RSSI measurement resource ^{Note1}	dBm/SCS ^N _{ote3}	-91	
$\hat{E}_s / N_{oc}$ on CLI-RSSI measurement resource	dB	-Infinity	
RSRP on CLI-RSSI measurement resource ^{Note2}	dBm/SCS	-Infinity	
$\hat{E}_s / I_{ot\ BB}$ on CLI-RSSI measurement resource ^{Note4}	dB	-Infinity	
Io on CLI-RSSI measurement resource ^{Note2}	dBm/95.04 MHz _{Note3}	-62.01	
Io on CLI-RSSI measurement resource ^{Note2}	dBm/1.08 MHz	-81.46	
Note 1:	Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 2:	SRS_RP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 3:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone		
Note 4:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 2dB for UE multi-band relaxation factor $\sum MB_P$ from TS 38.101-2 [19] Table 6.2.1.3-4.		
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.		

Table A.7.7.5.2.2-3: CLI-RSSI measurement resource configuration for FR2 CLI-RSSI accuracy

	Field	SRSCConf.1
CLI-RSSI measurement resource	rss-ResourceId	0
	rss-SCS	120kHz
	startPRB	0
	nrofPRBs	66
	startPosition	3
	nrofSymbols	11
	rss-PeriodicityAndOffset	sl160, 25

A.7.7.5.2.3 Test Requirements

The CLI-RSSI measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.22.2.1. The following requirements are to be verified:

During T1:

The UE is deemed to meet the requirement if the reported CLI-RSSI is in the range shown in table A.7.7.5.2.3-1.

During T2:

The UE is deemed to meet the requirement if the reported CLI-RSSI is in the range shown in table A.7.7.5.2.3-1.

Table A.7.7.5.2.3-1: CLI-RSSI absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
	$I_o - \delta + G_{min} \leq \text{Reported CLI-RSSI(dBm)} \leq I_o + \delta + G_{max}$
Note 1:	I_o is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for 1.08MHz
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.22.1.1-2, selected according to the I_o used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.7.7.6 L1-SINR measurement for beam reporting

A.7.7.6.1 L1-SINR measurement with CSI-RS based CMR and no dedicated IMR configured and CSI-RS resource set with repetition off

A.7.7.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 9.8.4.1 and clause 10.1.28.1 for L1-SINR measurements based on CSI-RS with the testing configurations for NR cells in Table A.7.7.6.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.7.7.6.1.1-1: Applicable NR configurations for FR2 L1-SINR test with CSI-RS based CMR and no dedicated IMR configured

Config	Description
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

A.7.7.6.1.2 Test parameters

In this set of test cases there are one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.7.6.1.2-1 and Table A.7.7.6.1.2-2 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.7.7.6.1.2-1 and Table A.7.7.6.1.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.7.7.6.1.2-1: FR2 CSI-RS based L1-SINR general test parameters

Parameter	Config	Unit	Test 1
SSB GSCN	1		freq1

Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
BW _{channel}	1	MHz	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.3 ULBWP.1.3
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
SMTc configuration	1		SMTc.1
CSI-RS	1		CSI-RS.3.2 TDD
reportConfigType	1		periodic
reportQuantity	1		cri-SINR-r16
nrofReportedRS	1		2
L1-SINR reporting period	1		slot80
Propagation condition	1		AWGN
Antenna configuration	1		1x2
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Table A.7.7.6.1.2-2: FR2 CSI-RS based L1-SINR OTA related test parameters

Parameter	Config	Unit	Test 1	
			CSI-RS0	CSI-RS1

Angle of arrival configuration			Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 4}			Rough	
N_{oc}	1~2	dBm/15 kHz	-100	
N_{oc}	1~2	dBm/SSB SCS	-91	
$\hat{E}_s / I_{ot}$	1~2	dB	10	-2
CSI-RS-RSRP ^{Note1}	1~2	dBm/SCS	-81	-93
I_o ^{Note1}	1~2	dBm/95.04MHz	-51.57	-59.86
$\hat{E}_s / N_{oc}$	1~2	dB	10	-2
Note 1: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: Void. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.7.6.1.3 Test Requirements

After 640ms from the beginning of the test, the L1-SINR measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 1 shall fulfil the requirements in clauses 10.1.28.1. The following requirements are to be verified:

For Test 1:

Absolute accuracy of CSI-RS0. The UE is deemed to meet the requirement if the reported L1-SINR is in the range shown in Table A.7.7.6.1.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the reported differential L1-SINR is in the range shown in Table A.7.7.6.1.3-1.

Table A.7.7.6.1.3-1: L1-SINR absolute accuracy test requirement

	Test requirement ^{Notes1,2}
CSI-RS0	$L1-SINR0 - \delta \leq \text{Reported SINR(dB)} \leq L1-SINR0 + \delta$
Note 1:	L1-SINR0 is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS 0 under consideration
Note 2:	δ is the SINR absolute accuracy requirement from Table 10.1.28.1.2-1, selected according to the I_o used in the test

Table A.5.7.6.1.3-2: L1-SINR relative accuracy test requirement

	Test requirement ^{Notes1,2}
CSI-RS0 - CSI-RS1	$L1-SINR0 - L1-SINR1 - \sigma \leq \text{Reported DIFFSINR (dB)} \leq L1-SINR0 - L1-SINR1 + \sigma$
Note 1:	L1-SINRn is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration
Note 2:	σ is the SINR relative requirement from Table 10.1.28.1.2-1, selected according to the I_o used in the test

A.7.7.6.2 L1-SINR measurement with SSB based CMR and dedicated IMR

A.7.7.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 9.8.4.2 and clause 10.1.28.2 for L1-SINR measurements with SSB based CMR and CSI-IM based IMR, with the testing configurations for NR cells in Table A.7.7.6.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.7.7.6.2.1-1: Applicable NR configurations for FR2 L1-SINR measurement test with SSB based CMR and CSI-IM based IMR

Config	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE FDD, NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.7.7.6.2.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.7.6.2.2-1 and Table A.7.7.6.2.2-2 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.7.7.6.2.2-1 and Table A.7.7.6.2.2-2.

Here is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources and one CSI-IM resource set with two CSI-IM resource. UE is configured to perform RLM and BFD measurement based on the SSB resources 0 and 1. UE is configured to perform L1-SINR measurement based on the SSBs as CMR and the CSI-IM resources as IMR.

Table A.7.7.6.2.2-1: FR2 L1-SINR general test parameters with SSB based CMR and CSI-IM based IMR

Parameter	Config	Unit	Test 1
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
BW _{channel}	1~2	MHz	100: N _{RB,C} = 66
PDSCH Reference measurement channel	1~2		SR.3.1 TDD
RMSI CORESET Reference Channel	1~2		CR.3.1 TDD
Dedicated CORESET Reference Channel	1~2		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
CSI-IM configuration	1~2		CSI-IM 3.1 TDD
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1
			ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3
			ULBWP.1.3
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
SMTC configuration	1~2		SMTC.1
reportConfigType	1~2		periodic
reportQuantity-r16	1~2		ssb-Index-SINR-r16
Number of reported RS	1~2		2

L1-SINR reporting period	1~2		slot640
Propagation condition	1~2		AWGN
Antenna configuration	1~2		1x2
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Table A.7.7.6.2.2-2: FR2 L1-SINR SSB specific test parameters

Parameter	Config	Unit	Test 1	
			SSB0	SSB1
Angle of arrival configuration			Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 4}			Rough	
N_{oc}	1~2	dBm/15kHz	-100	
N_{oc}	1	dBm/SSB	-91	
	2	SCS	-88	
$\hat{E}_s / I_{ot}$	1~2	dB	10	-2
SS-RSRP ^{Note1}	1	dBm/SCS	-81	-93
	2		-78	-90
I_o ^{Note1}	1~2	dBm/95.04 MHz	-51.57	-59.86
$\hat{E}_s / N_{oc}$	1~2	dB	10	-2
Note 1: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.7.6.2.3 Test Requirements

After 640ms from the beginning of the test, the L1-SINR measurement accuracy for SSB#0+CSI-IM#0 and SSB#1+CSI-IM#1 of Cell 1 shall fulfil the requirements in clauses 10.1.28.2. The following requirements are to be verified:

For Test 1:

Absolute accuracy of SSB#0+CSI-IM#0. The UE is deemed to meet the requirement if the reported L1-SINR is in the range shown in Table A.7.7.6.2.3-1.

Relative accuracy of SSB#0+CSI-IM#0 compared with SSB#1+CSI-IM#1. The UE is deemed to meet the requirement if the reported differential L1-SINR is in the range shown in Table A.7.7.6.2.3-2.

Table A.7.7.6.2.3-1: L1-SINR absolute accuracy test requirement

	Test requirement ^{Notes1,2}
SSB#0+CSI-IM#0	$L1_SINR0 - \delta \leq \text{Reported SINR(dB)} \leq L1_SINR0 + \delta$
Note 1:	L1_SINR0 is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the SSB#0+CSI-IM#0 under consideration
Note 2:	δ is the SINR absolute accuracy requirement from Table 10.1.28.2.1-2, selected according to the I_o used in the test

Table A.7.7.6.2.3-2: L1-SINR relative accuracy test requirement

	Test requirement ^{Notes1,2}
SSB#0+CSI-IM#0 - SSB#1+CSI-IM#1	$L1-SINR0 - L1-SINR1 - \sigma \leq \text{Reported DIFFSINR (dB)} \leq L1-SINR0 - L1-SINR1 + \sigma$
Note 1:	L1-SINRn is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the SSB#n+CSI-IM#n under consideration
Note 2:	σ is the SINR relative requirement from Table 10.1.28.2.2-1, selected according to the I_o used in the test

A.7.7.6.3 L1-SINR measurement with CSI-RS based CMR and dedicated IMR

A.7.7.6.3.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-SINR measurement accuracy is within the specified limits. This test will partly verify the requirements in Clauses 9.8.4.3 and clause 10.1.28.3 for L1-SINR measurements based on CSI-RS as both CMR and IMR with the testing configurations for NR cell in Table A.7.7.6.3.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

Table A.7.7.6.3.1-1: Applicable NR configurations for FR2 L1-SINR measurement test with CSI-RS based both CMR based IMR

Config	Description
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

A.7.7.6.3.2 Test parameters

In this set of test cases there are one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.7.7.6.3.2-1 and Table A.7.7.6.3.2-2 below. The absolute and relative accuracy of L1-SINR measurements are tested by using the parameters in Table A.7.7.6.3.2-1 and Table A.7.7.6.3.2-2.

There is no measurement gap configured in the test. Before the test, UE is configured two CSI-RS resource sets with two CSI-RS resources for each set. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB. UE is configured to perform L1-SINR measurement based on the configured CSI-RS as both CMR and IMR.

Table A.7.7.6.3.2-1: FR2 L1-SINR measurement test with CSI-RS based both CMR and IMR

Parameter	Config	Unit	Test 1
-----------	--------	------	--------

SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
BW _{channel}	1	MHz	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
SMTC configuration	1		SMTC.1
CSI-RS configuration as CMR	1		CSI-RS.3.2 TDD
CSI-RS configuration as IMR	1		CSI-RS.3.3A TDD
reportConfigType	1		periodic
reportQuantity-r16	1		cri-SINR-r16
nrofReportedRS	1		2
L1-RSRP reporting period	1		slot80
Propagation condition	1		AWGN
Antenna configuration	1		1x2
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Table A.7.7.6.3.2-2: FR2 CSI-RS based L1-SINR measurement OTA related test parameters

Parameter	Config	Unit	Test 1	
			CSI-RS0	CSI-RS1
Angle of arrival configuration			Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 4}			Rough	

N_{oc}	1~2	dBm/15 kHz	-100	
N_{oc}	1~2	dBm/SS B SCS	-91	
$\hat{E}_s / I_{ot}$	1~2	dB	10	0
CSI-RS-RSRP ^{Note1}	1~2	dBm/SC S	-81	-91
I_o ^{Note1}	1~2	dBm/95.04M Hz	-51.57	-59.86
$\hat{E}_s / N_{oc}$	1~2	dB	10	0
Note 1: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 2: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 3: No additional noise is added by the test system in Test 2. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.7.6.3.3 Test Requirements

After 640ms from the beginning of the test, the L1-SINR measurement accuracy for CSI-RS#0 for CMR + CSI-RS#0 for IMR and CSI-RS#1 for CMR + CSI-RS#0 for IMR of Cell 1 shall fulfil the requirements in clause 10.1.28.3. The following requirements are to be verified:

Absolute accuracy of CSI-RS#0 for CMR + CSI-RS#0 for IMR. The UE is deemed to meet the requirement if the reported L1-SINR is in the range shown in Table A.7.7.6.3.3-1.

Relative accuracy of CSI-RS#0 for CMR + CSI-RS#0 for IMR compared with CSI-RS#1 for CMR + CSI-RS#1 for IMR. The UE is deemed to meet the requirement if the reported differential L1-SINR is in the range shown in Table A.7.7.6.3.3-2.

Table A.7.7.6.3.3-1: L1-SINR absolute accuracy test requirement

	Test requirement ^{Notes1,2}
CSI-RS#0 for CMR + CSI-RS#0 for IMR	$L1-SINR_0 - \delta \leq \text{Reported SINR (dBm)} \leq L1-SINR_0 + \delta$
Note 1: L1-SINR _n is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS#n under consideration	
Note 2: δ is the SINR absolute accuracy requirement from Table 10.1.28.3.1-1.	

Table A.7.7.6.3.3-2: L1-SINR relative accuracy test requirement

	Test requirement ^{Notes1,2}
(CSI-RS#0 for CMR + CSI-RS#0 for IMR) – (CSI-RS#1 for CMR + CSI-RS#1 for IMR)	$L1-SINR_0 - L1-SINR_1 - \sigma \leq \text{Reported DIFFSINR (dB)} \leq L1-SINR_0 - L1-SINR_1 + \sigma$
Note 1: L1-SINR _n is the equivalent SINR received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the (CSI-RS#n for CMR + CSI-RS#n for IMR) under consideration	
Note 2: σ is the SINR relative requirement from Table 10.1.28.3.2-1, selected according to the I_o used in the test	

A.7.7.7 CSI-RSRP

A.7.7.7.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.7.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.3.2.1 and 10.1.3.2.2 for intra-frequency measurements.

A.7.7.7.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.7.1.2-1. Both absolute and relative accuracy of CSI-RSRP intra-frequency measurements are tested by using the parameters in Table A.7.7.7.1.2-2 and A.7.7.7.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1. The test consists of two time phases T1 and T2.

Table A.7.7.7.1.2-1: CSI-RSRP Intra frequency CSI-RSRP supported test configurations

Configuration	Description
1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.7.1.2-2: CSI-RSRP Intra frequency general test parameters

Parameter	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,C} = 24		100: N _{RB,C} = 24	
Downlink initial BWP configuration		DLB WP.0. 1	-	DLB WP.0. 1	-
Downlink dedicated BWP configuration		DLB WP.1. 1	-	DLB WP.1. 1	-
Uplink initial BWP configuration		ULB WP.0. 1	-	ULB WP.0. 1	-
Uplink dedicated BWP configuration		ULB WP.1. 1	-	ULB WP.1. 1	-
DRX cycle configuration		Not applic able	-	Not applic able	-
TRS configuration		TRS.2 .1 TDD	-	TRS.2 .1 TDD	-
TCI state		TCI.St ate.0	-	TCI.St ate.0	-
PDSCH Reference measurement channel		SR.3. 1 TDD	-	SR.3. 1 TDD	-
RMSI CORESET Reference Channel		CR.3. 1 TDD	-	CR.3. 1 TDD	-

Control channel RMC		CCR. 3.1 TDD	-	CCR. 3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SMTC configuration		SMTC.1		SMTC.1	
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD			
Time offset with Cell 1	μs	-	0.58	-	0.58
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Propagation conditions		AWG N	AWG N	AWG N	AWG N
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table A.7.7.1.2-3: CSI-RSRP Intra frequency OTA related test parameters

Parameter	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 7}		Rough		Assumption for UE beams ^{Note 7}	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-91.6		N/A	
N_{oc} ^{Note1}	dBm/SCS ^{Note4}	-82.6		N/A	
$\hat{E}_s/N_{oc}$ for SSB	dB	6.0	1.0	N/A	N/A
$\hat{E}_s/N_{oc}$ for CSI-RS	dB	6.0	1.0	N/A	N/A
E_s for SSB	dBm/SCS ^{Note4}			(Table B.2.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2.2-2 Rx Beam Peak +2.1dB)

E_s for CSI-RS	dBm/SCS Note4			(Table B.2.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2.2-2 Rx Beam Peak +2.1dB)
CSI-RS_RP Note2	dBm/SCS	-76.6	-81.6	(Table B.2.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2.2-2 Rx Beam Peak +2.1dB)
$\hat{E}_s/I_{ot_BB}$ Note6	dB	2.44	-5.98	-5.98	-5.98
I_o Note2	dBm/95.04 MHz Note4	-50.05		(Table B.2.2.2-2 Rx Beam Peak +29.70dB)	
Note 1:	Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2:	CSI-RS_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	Void				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	Void				
Note 6:	Calculation of E_s/I_{ot_BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.				
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.7.7.1.3 Test Requirements

The CSI-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1.3.2.1 and relative accuracy requirements in clause 10.1.3.2.2. The following requirements are to be verified:

During T1:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in table A.7.7.7.1.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 10.1.3.2.2-1.

During T2:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in table A.7.7.7.1.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 10.1.3.2.2-1.

During T1 and T2:

Relative accuracy of Cell 1 during T2 compared with Cell 1 during T1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 10.1.3.2.2-1

Relative accuracy of Cell 2 during T2 compared with Cell 2 during T1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in Table 10.1.3.2.2-1.

Table A.7.7.7.1.3-1: CSI-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
Cell 1	$\text{CSI-RS_RP1} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP1} + \delta + G_{\max}$
Cell 2	$\text{CSI-RS_RP2} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP2} + \delta + G_{\max}$
Note 1:	CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.3.2.1-1, selected according to the δ used in the test
Note 3:	$G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.7.7.7.2 SA inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.7.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.5.2.1 and 10.1.5.2.2 for inter-frequency measurements with the testing configurations for NR cells in Table A.7.7.7.2.1-1.

Table A.7.7.7.2.1-1: Applicable NR configurations for FR2 inter-frequency CSI-RSRP accuracy test

Configuration	Description
1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

A.7.7.7.2.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.7.7.2.2-1 and Table A.7.7.7.2.2-2 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.7.7.7.2.2-1 and Table A.7.7.7.2.2-2. The inter-frequency measurements are supported by a measurement gap.

Table A.7.7.7.2.2-1: CSI-RSRP inter-frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
BW _{channel}			100: N _{RB,c} = 24		100: N _{RB,c} = 24	
Gap pattern ID			0		0	
Duplex mode			TDD	TDD	TDD	TDD
TDD configuration			TDDConf.3.1		TDDConf.3.1	
PDSCH Reference measurement channel			SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Reference Channel			CCR.3.1 TDD	-	CCR.3.1 TDD	-
SSB configuration			SSB.3 FR2		SSB.3 FR2	
SMTC configuration			SMTC.1		SMTC.1	
OCNG Patterns			OP.3		OP.3	

Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration			DLBWP.1.3 ULBWP.1.3	DLBWP.1.3 ULBWP.1.3
TRS Configuration			TRS.2.1 TDD	TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration			TCI.State.2	TCI.State.2
CSI-RS configuration for RRM			CSI-RS.RRM.FR2.1 TDD	CSI-RS.RRM.FR2.1 TDD
Time offset between Cell 2 and Cell 3		μs	0.58	0.58
EPRE ratio of PSS to SSS	dB	0	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Propagation condition		-	AWGN	AWGN
Antenna configuration		-	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Table A.7.7.2.2-2: SS-RSRP inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 4b according to clause A.3.15.4.2		Setup 4b according to clause A.3.15.4.2	
		AoA1 Spherical coverage	AoA2 Rx Beam Peak	AoA1 Spherical coverage	AoA2 Rx Beam Peak
N_{oc} ^{Note1}	dBm/15kHz z ^{Note4}	-90.6	-90.6	(Table B.2.3.2-2 Rx Beam Peak +1.97dB)	(Table B.2.3.2-2 Rx Beam Peak - 3.03dB)
Assumption for UE beams ^{Note 7}		Rough		Rough	
N_{oc} ^{Note1}	dBm/SCS ^{Note4}	-81.6	-81.6	(Table B.2.3.2-2 Rx Beam Peak +11.0dB)	(Table B.2.3.2-2 Rx Beam Peak +6.0dB)
$\hat{E}_s/N_{oc}$ for SSB	dB	6.0	6.0	17.0	-1.0

$\hat{E}_s/N_{oc}$ for CSI-RS	dB	6.0	6.0	17.0	-1.0
CSI-RS_RP ^{Note2}	dBm/SCS	-75.60	-75.60	(Table B.2.3.2-2 Rx Beam Peak +28.0dB)	(Table B.2.3.2-2 Rx Beam Peak +5.0dB)
(CSI-RS_RP _{Cell 1} – CSI-RS_RP _{Cell 2})	dB	0		23.00	
$\hat{E}_s/I_{otBB}$ ^{Note6} for SSB	dB	5.29	5.96	8.86	-3.92
$\hat{E}_s/I_{otBB}$ ^{Note6} for CSI-RS	dB	5.29	5.96	8.86	-3.92
Io ^{Note2}	dBm/95.04 MHz ^{Note4}	-50.03	-50.03	(Table B.2.3.2-2 Rx Beam Peak +52.68dB)	(Table B.2.3.2-2 Rx Beam Peak +33.13dB)
(Io _{freq 1} – Io _{freq 2})	dB	0		19.55	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: CSI-RS_RP, Es/Iot, Io, (CSI-RS_RP _{Cell 2} – CSI-RS_RP _{Cell 1}) and (Io _{freq 2} – Io _{freq 1}) levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: Void					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: Void					
Note 6: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P or ΔMB _S from TS 38.101-2 [19] Table 6.2.1.3-4.					
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.7.7.2.3 Test Requirements

The CSI-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirements in clause 10.1.5.2.1 and the relative requirements in clause 10.1.5.2.2.

Test 1:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in Table A.7.7.7.2.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in A.7.7.7.2.3-2.

Test 2:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported CSI-RSRP is in the range shown in Table A.7.7.7.2.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported CSI-RSRP meets the requirements in A.7.7.7.2.3-2.

Table A.7.7.2.3-1: CSI-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3,4}
Cell 1	$\text{CSI-RS_RP1} - \delta + G_{\min} + X \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP1} + \delta + G_{\max}$
Cell 2	$\text{CSI-RS_RP2} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP2} + \delta + G_{\max}$
Note 1:	CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.5.2.1-1, selected according to the Io used in the test
Note 3:	$G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.

Table A.7.7.2.3-2: CSI-RSRP relative accuracy test requirement

	Test requirement ^{Notes1,2,3,4}
Cell 2 – Cell 1	$\text{CSI-RS_RP2} - \text{CSI-RS_RP1} - \delta - D - G_{\text{inter}} \leq \text{Reported RSRP(dB)} \leq \text{CSI-RS_RP2} - \text{CSI-RS_RP1} + \delta + G_{\text{inter}} - (X) + E$
Note 1:	CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP relative accuracy requirement from Table 10.1.5.2.2-1
Note 3:	Void
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.
Note 5:	D is the margin due to mis-alignment between fine beam and rough beam. D is the Rough Beam gain reduction in Rx beam peak direction from Table B.2.1.5.3-1, selected according to the UE power class. D is always a positive value.
Note 6:	G_{inter} is the margin due to different antenna gain caused by frequency separation. G_{inter} is from Table B.2.1.5.2-1, selected according to the UE power class, and is always a positive value.
Note 7:	E = 3 (dB) is an additional margin to account for the actual gain difference between peak direction and spherical coverage using rough beams.

A.7.7.8 CSI-RSRQ

A.7.7.8.1 SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.8.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.8.2.1.

A.7.7.8.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.8.1.2-1. The absolute accuracy of CSI-RSRQ intra-frequency measurement is tested by using the parameters in Table A.7.7.8.1.2-2 and Table A.7.7.8.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell.

Table A.7.7.8.1.2-1: CSI-RSRQ Intra frequency CSI-RSRQ supported test configurations

Configuration	Description
---------------	-------------

1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
---	--

Table A.7.7.8.1.2-2: CSI-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			Freq1		Freq1	
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD		TRS.2.1 TDD	
TCI state			TCI.State .0		TCI.State te.0	
PDSCH Reference measurement channel			SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	
Control channel RMC			CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns			OP.1	OP.1	OP.1	OP.1
Time offset with Cell 1		μs	-	0.58	-	0.58
SMTC configuration			SMTC.1			
SSB configuration			SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
PDSCH/PDCCH subcarrier spacing		kHz	120	120	120	120
CSI-RS configuration for RRM			CSI-RS.RRM.FR2.1 TDD			
EPRE ratio of CSI-RS to SSS		dB	0	0	0	0
EPRE ratio of PSS to SSS						
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
Propagation condition			AWGN		AWGN	
Antenna configuration			1x2		1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						

Table A.7.7.8.1.2-3: CSI-RSRQ Intra frequency OTA related test parameters

	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1according to clause A.3.15.1	
Assumption for UE beams ^{Note 9}		Rough			

N_{OC} ^{Note1}	dBm/15kHz ^{Note4}	-95		-95	
N_{OC} ^{Note1}	dBm/SCS ^{Note3}	-86		-86	
CSI-RSRP ^{Note2}	dBm/SCS ^{Note4}	-83	-83	-89	-89
CSI-RSRQ ^{Note2}	dB	-14.77	-14.77	-16.81	-16.81
$\hat{E}_s / N_{oc}$ for SSB	dB	3	3	-3	-3
$\hat{E}_s / N_{oc}$ for CSI-RS	dB	3	3	-3	-3
$\hat{E}_s / I_{ot}$ for SSB	dB	-1.76	-1.76	-4.76	-4.76
$\hat{E}_s / I_{ot}$ for CSI-RS	dB	-1.76	-1.76	-4.76	-4.76
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-50		-54	-54
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{OC} to be fulfilled.					
Note 2: CSI-RSRQ, CSI-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: CSI-RSRQ and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone					
Note 6: NR operating band groups are as defined in Clause 3.5.2.					
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.7.8.1.3 Test Requirements

The CSI-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal CSI-RSRQ+2.5 dB to Nominal CSI-RSRQ-3.5 dB and the CSI-RSRQ measurement accuracy in test 2 shall be within the range Nominal CSI-RSRQ+3.5 dB to Nominal CSI-RSRQ-4.5 dB according to the requirements in clause 10.1.8.2.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test. Nominal RSRQ is the value shown in table A.7.7.8.1.2-3.

A.7.7.8.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.7.7.8.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.10.2.1 and 10.1.10.2.2 for inter-frequency measurement.

A.7.7.8.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.7.7.8.2.2-1. Both absolute accuracy and relative accuracy requirements of CSI-RSRQ inter-frequency measurement are tested by using test parameters in Table A.7.7.8.2.2-2 and Table A.7.7.8.2.2-3. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A. 7.7.8.2.2-1: CSI-RSRQ Inter frequency supported test configurations

Configuration	Description
---------------	-------------

1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
---	--

Table A.7.7.8.2.2-2: CSI-RSRQ Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		Freq1	freq2	freq1	Freq2
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,C} = 66		100: N _{RB,C} = 66	
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
Time offset with Cell 1	μs	-	0.58	-	0.58
SMTc configuration		SMTc. 1	SMTc. 1	SMTc. 1	SMTc. 1
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD			
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of CSI-RS to SSS					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					

Table A.7.7.8.2.2-3: CSI-RSRQ Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
AoA setup		Setup 1 in clause A.3.15.		Setup 1 in clause A.3.15.	
Assumption for UE beams ^{Note 8}		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-94.03		-94.03	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-85.0		-85.0	
CSI-RSRP ^{Note2}	dBm/SCS ^{Note4}	-86.75	-86.75	-88	-88
CSI-RSRQ ^{Note2}	dB	-14.75	-14.75	-15.56	-15.56
$\hat{E}_s / N_{oc}$ for SSB	dB	-1.75	-1.75	-3	-1.75
$\hat{E}_s / N_{oc}$ for CSI-RS	dB	-1.75	-1.75	-3	-1.75
$\hat{E}_s / I_{\alpha}$ for SSB	dB	-1.75	-1.75	-3	-3
$\hat{E}_s / I_{\alpha}$ for CSI-RS	dB	-1.75	-1.75	-3	-3

$I_{o\text{Note2}}$	dBm/95.04 MHz ^{Note4}	-53.8	-53.8	-54.25	-54.25
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2:	CSI-RSRQ, CSI-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	CSI-RSRQ and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone				
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone				
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.7.8.2.3 Test Requirements

The CSI-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal CSI-RSRQ+2.5dB to Nominal CSI-RSRQ -3.5dB and the CSI-RSRQ measurement accuracy in test 2 shall be within the range Nominal CSI-RSRQ +3.5dB to Nominal CSI-RSRQ -4.5dB according to the requirements in clause 10.1.10.2.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test.

The CSI-RSRQ relative measurement accuracy shall fulfil the requirements in clause 10.1.10.2.2.

A.7.7.9 CSI-SINR

A.7.7.9.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.7.7.9.1.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.13.2.1.

A.7.7.9.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.9.1.2-1. . The absolute accuracy of CSI-SINR intra-frequency measurement is test by using the parameters in Table A.7.7.9.1.2-2 and Table A.7.7.9.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.9.1.2-1: CSI-SINR Intra frequency CSI-SINR supported test configurations

Configuration	Description
1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.9.1.2-2: CSI-SINR Intra frequency test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		Freq2		Freq2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,C} = 66		100: N _{RB,C} = 66	
Downlink initial BWP configuration		DLBWP.0.1			
Downlink dedicated BWP configuration		DLBWP.1.1			

Uplink initial BWP configuration		ULBWP.0.1			
Uplink dedicated BWP configuration		ULBWP.1.1			
DRX cycle configuration	ms	Not applicable			
TRS configuration		TRS.2.1 TDD			
TCI state		TCI.State.0			
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	
Dedicated RMSI CORESET Reference Channel		CCR.3 .1 TDD	-	CCR.3. 1 TDD	-
Time offset with Cell 1	μs	-	0.29	-	0.29
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTc configuration		SMTc.1			
SSB configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD			
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
SS-RSSI-Measurement		Not Applicable			
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of CSI-RS to SSS					
EPRE ratio of OCNG to SSS ^{Note 1}					
Propagation conditions		AWGN			
Antenna configuration		1x2			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: CSI-SINR, CSI-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					

Table A.7.7.9.1.2-3: CSI-SINR Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 9}		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-105		-105	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-96		-96	
CSI-RSRP ^{Note2}	dBm/SCS ^{Note4}	-91.46	-93.34	-99	-99
CSI-SINR ^{Note2}	dB	0	-3.2	-4.76	-4.76
$\hat{E}_s / N_{oc}$ for SSB	dB	4.54	2.66	-3	-3
$\hat{E}_s / N_{oc}$ for CSI-RS	dB	4.54	2.66	-3	-3

$\hat{E}_s/I_{ot}$ for SSB	dB	0	-3.2	-4.76	-4.76
$\hat{E}_s/I_{ot}$ for CSI-RS	dB	0	-3.2	-4.76	-4.76
I_o ^{Note2}	dBm/95.04 MHz Note4	-59.2		-64	
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: CSI-SINR, CSI-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone					
Note 6: NR operating band groups are as defined in clause 3.5.2.					
Note 7: Void					
Note 8: Void					
Note 9: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.7.9.1.3 Test Requirements

The CSI-SINR absolute measurement accuracy in test 1 shall be within the range Nominal CSI-SINR+XdB to Nominal CSI-SINR –X-1dB and the CSI-SINR measurement accuracy in test 2 shall be within the range Nominal CSI-SINR +YdB to Nominal CSI-SINR –Y-1dB according to the requirements in clause 10.1.13.2.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test. The relative CSI-SINR measurement accuracy shall fulfil the requirements in clause 10.1.13.2.1.

Editor's note: The values of X and Y are pending on the accuracy requirement discussion

A.7.7.9.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell

A.7.7.9.2.1 Test Purpose and Environment

The purpose of this test is to verify that the CSI-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.15.2.1 and 10.1.15.2.2 for inter-frequency measurement.

A.7.7.9.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.7.7.9.2.2-1. Both absolute accuracy and relative accuracy requirements of CSI-SINR inter-frequency measurement are tested by using test parameters in Table A.7.7.9.2.2-2 and Table A.7.7.9.2.2-3. In all test cases, Cell 1 is the PCell and Cell 2 is target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.9.2.2-1: CSI-SINR Inter frequency CSI-SINR supported test configurations

Configuration	Description
1	120 kHz SSB and CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode

Table A.7.7.9.2.2-2: CSI-SINR Inter frequency general test parameters

Parameter	Unit	Test 1	Test 2	Test 3
-----------	------	--------	--------	--------

		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
		freq1	freq2	freq1	freq2	freq1	freq2
SSB ARFCN							
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Downlink initial BWP configuration		DLBWP.0.1					
Downlink dedicated BWP configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
DRX cycle configuration	ms	Not applicable					
TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
Time offset with Cell 1	μs	-	0.29	-	0.29	-	0.29
OCNG Patterns		OP.1	OP.1	OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC. 1	SMTC. 1	SMTC. 1	SMTC. 1	SMTC. 1	SMTC. 1
CSI-RS configuration for RRM		CSI-RS.RRM.FR2.1 TDD					
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG to SSS ^{Note 1}							
Propagation conditions		AWGN					
Antenna configuration		1x2					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: CSI-SINR, CSI-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							

Table A.7.7.9.2.2-3: CSI-SINR Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration	degrees	Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 10}		Rough		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-105		-105		-105	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-96		-96		-96	
CSI-RSRP ^{Note2}	dBm/SCS ^{Note4}	-96.5	-96.5	-85	-85	-99	-99
CSI-SINR ^{Note2}	dB	-0.5	-0.5	11	11	-3.0	-3.0

$\hat{E}_s / N_{oc}$ for SSB	dB	-0.5	-0.5	11.0	11.0	-3.0	-3.0
$\hat{E}_s / N_{oc}$ for CSI-RS	dB	-0.5	-0.5	11.0	11.0	-3.0	-3.0
$\hat{E}_s / I_{ot}$ for SSB	dB	-0.5	-0.5	11	11	-3.0	-3.0
$\hat{E}_s / I_{ot}$ for CSI-RS	dB	-0.5	-0.5	11	11	-3.0	-3.0
I_o ^{Note2}	dBm/95.04 MHz Note4	-69.3		-55.4		-65.24	
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 2:	CSI-SINR, CSI-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 3:	CSI-SINR and CSI-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 6:	NR operating band groups are as defined in clause 3.5.2.						
Note 7:	Void						
Note 8:	Void						
Note 9:	Void						
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.7.9.2.3 Test Requirements

The CSI-SINR absolute measurement accuracy in test 1 shall be within the range Nominal CSI-SINR +XdB to Nominal CSI-SINR –X-1dB and the CSI-SINR measurement accuracy in test 2 shall be within the range Nominal CSI-SINR +YdB to Nominal CSI-SINR –Y-1dB according to the requirements in clause 10.1.15.2.1 with an additional -1dB margin reflecting the possible impact of UE self noise in the test.

The CSI-SINR relative measurement accuracy shall fulfil the requirements in clause 10.1.15.2.2.

A.7.7.10 RSTD measurements

A.7.7.10.1 RSTD measurement accuracy test case for single positioning frequency layer

A.7.7.10.1.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.7.7.10.1.1-1.

Table A.7.7.10.1.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cells. Both cells are on the same NR RF channel in FR2. GP#24 is configured if UE supports GP#24, otherwise, GP#13 is configured for the test. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-*

RequestLocationInformation message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 9.9.2.

Table A.7.7.10.1.1-2: RSTD accuracy test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
Measurement gap		GP#24 or GP#13		GP#24 or GP#13	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
PRS configuration		PRS.1.1 FR2	PRS.1.1 FR2	PRS.1.2 FR2	PRS.1.2 FR2
PRS Resource slot offset	slot	0	4	0	4
Expected RSTD	μs	N/A	3	N/A	3
Expected RSTD uncertainty	μs	N/A	5	N/A	5
Time offset with Cell 1	μs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
EPRE ratio of PRS to SSS	dB	0	0	0	0
Propagation conditions		AWGN	AWGN	AWGN	AWGN

Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.					

Table A.7.7.10.1.1-3: RSTD accuracy OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 5}		Rough		Rough	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-89		-89	
PRS $\hat{E}_s / N_{oc}$	dB	-5.7	-11.9	-5.7	-11.9
PRP ^{Note2}	dBm/SCS	-94.7	-100.9	-94.7	-100.9
PRS $\hat{E}_s / I_{ot}$	dB	-6	-13	-6	-13
I_o ^{Note2}	dBm/190.0 8 MHz ^{Note3}	-55.75	-55.75	-55.75	-55.75
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: PRP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. The I_o is calculated based only on the symbols in which PRS is transmitted. Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 4: Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4. Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.7.10.1.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.7.7.10.2 RSTD measurement accuracy test case for dual positioning frequency layer

A.7.7.10.2.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 9.9.2.

The supported test configurations are specified in Table A.7.7.10.2.1-1.

Table A.7.7.10.2.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell on NR RF channel #1 in FR2. Cell 2 is a neighbour cell on a different NR RF channel #2 in FR2. GP#24 is configured if UE supports GP#24, otherwise, GP#13 is configured for the test.

Table A.7.7.10.2.1-2: RSTD accuracy test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN		freq1	freq2	freq1	freq2
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
Measurement gap		GP#24 or GP#13		GP#24 or GP#13	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
PRS configuration		PRS.1.1 FR2	PRS.1.1 FR2	PRS.1.2 FR2	PRS.1.2 FR2
PRS Resource slot offset	slot	0	4	0	4
Expected RSTD	μs	N/A	3	N/A	3
Expected RSTD uncertainty	μs	N/A	5	N/A	5
Time offset with Cell 1	μs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120

EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
EPRE ratio of PRS to SSS	dB	0	0	0	0
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.					

Table A.7.7.10.2.1-3: RSTD accuracy OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 5}		Rough		Rough	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-89		-89	
PRS $\hat{E}_s / N_{oc}$	dB	-6	-13	-6	-13
PRP ^{Note2}	dBm/SCS	-95	-102	-95	-102
PRS $\hat{E}_s / I_{ot}$	dB	-6	-13	-6	-13
I_o ^{Note2}	dBm/190.0 8 MHz ^{Note3}	-56.03	-56.79	-56.03	-56.79
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: PRP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. The I_o is calculated based only on the symbols in which PRS is transmitted. Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 4: Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					

Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.10.2.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.7.7.10.3 RSTD measurement accuracy test case with reduced number of samples for single positioning frequency layer in FR2 in RRC_CONNECTED state

A.7.7.10.3.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions. In this test UE that supports *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED* is configured by LMF to perform PRS measurement with reduced number of samples.

The supported test configurations are specified in Table A.7.7.10.3.1-1.

Table A.7.7.10.3.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR2. GP#24 is configured if UE supports GP#24, otherwise, GP#13 is configured for the test. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be longer than the UE measurement period as defined in clause 9.9.2.7.

Table A.7.7.10.3.1-2: RSTD accuracy test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	200: N _{RB,C} = 132		200: N _{RB,C} = 132	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1

PRS configuration		PRS.1.2 FR2	PRS.1.2 FR2	PRS.1.2 FR2	PRS.1.2 FR2
PRS BW		64 PRBs	64 PRBs	128 PRBs	128 PRBs
PRS Resource slot offset	slot	0	4	0	4
Expected RSTD	μs	N/A	3	N/A	3
Expected RSTD uncertainty	μs	N/A	5	N/A	5
Time offset with Cell 1	μs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table A.7.7.10.3.1-3: RSTD accuracy OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 5}		Rough		Rough	
N_{oc} ^{Note1}	$\text{dBm/SCS}^{\text{Note3}}$	-89		-89	
PRS $\hat{E}_s / N_{oc}$	dB	-1.44	-3.65	-1.44	-3.65
PRS-RSRP ^{Note2}	dBm/SCS	-90.44	-92.65	-90.44	-92.65
SS-RSRP ^{Note2}	dBm/SCS	-90.44	-92.65	-90.44	-92.65
PRS $\hat{E}_s / I_{ot_BB}$ ^{Note4}	dB	-3	-6	-3	-6
I_o ^{Note2}	$\text{dBm/190.0 8 MHz}^{\text{Note3}}$	-53.68	-53.68	-53.68	-53.68
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					

Note 4:	Calculation of $E_s/I_{ot_{BB}}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.10.3.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.7.7.10.4 RSTD measurement accuracy test case with Rx TEG

A.7.7.10.4.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement when the measurements of reference cell and neighbor cell are within the same Rx TEG meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.7.7.10.4.1-1.

Table A.7.7.10.4.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR2. GP#24 is configured if UE supports GP#24, otherwise, GP#13 is configured for the test. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test.

The UE is requested to provide the Rx TEG in the test via *nr-UE-RxTEG-Request-r17* in *NR-TDOA-RequestLocationInformation*.

The test applies to the UE supporting Rx TEG defined in *NR-UE-TEG-Capability* and reporting the same Rx TEG for the measurements of reference cell and neighbour cell.

Table A.7.7.10.4.1-2: RSTD accuracy test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	200: N _{RB,C} = 132		200: N _{RB,C} = 132	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-

Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
PRS configuration		PRS.1.1 FR2	PRS.1.1 FR2	PRS.1.2 FR2	PRS.1.2 FR2
PRS Resource slot offset	slot	0	4	0	4
Expected RSTD	μs	N/A	3	N/A	3
Expected RSTD uncertainty	μs	N/A	5	N/A	5
Time offset with Cell 1	μs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
EPRE ratio of PRS to SSS					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table A.7.7.10.4.1-3: RSTD accuracy OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 5}		Rough		Rough	
N_{oc} ^{Note1}	$\text{dBm/SCS}^{\text{Note3}}$	-89		-89	
PRS $\hat{E}_s / N_{oc}$	dB	-5.7	-11.9	-5.7	-11.9
PRP ^{Note2}	dBm/SCS	-94.7	-100.9	-94.7	-100.9
PRS $\hat{E}_s / I_{ot}$ ^{Note4}	dB	-6	-13	-6	-13
I_o ^{Note2}	$\text{dBm/190.0 8 MHz}^{\text{Note3}}$	-55.75	-55.75	-55.75	-55.75
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: PRP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Note 3:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 4:	Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.7.10.4.2 Test Requirements

The RSTD measurement for Cell 1 and Cell 2 should both fulfil the absolute accuracy requirements with same Rx TEG for reference cell and neighbour cell defined in clause 10.1.23.2.

A.7.7.11 PRS-RSRP measurements

A.7.7.11.1 SA measurement accuracy with PRS in FR2

A.7.7.11.1.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.24.2.1 and 10.1.24.2.2.

A.7.7.11.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.11.1.2-1. Both absolute and relative accuracy of PRS-RSRP measurements are tested by using the parameters in Table A.7.7.11.1.2-2 and A.7.7.11.1.2-3. In all test cases, Cell 1 is the PCell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.11.1.2-1: PRS-RSRP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.7.11.1.2-2: PRS-RSRP general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	200: N _{RB,C} = 132		200: N _{RB,C} = 132	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
Measurement gap		GP#13 or GP#24 ^{Note2}			
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-

RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTTC configuration		SMTTC.1	SMTTC.1	SMTTC.1	SMTTC.1
Time offset with Cell 1	μs	-	3	-	3
Expected RSTD	μs	3			
Expected RSTD uncertainty	μs	5			
PRS configuration		PRS.1.3 FR2	PRS.1.3 FR2	PRS.1.4 FR2	PRS.1.4 FR2
PRS Resource slot offset	slot	0	4	0	4
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
EPRE ratio of PRS to SSS	dB	0	0	0	0
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.					

Table A.7.7.11.1.2-3: PRS-RSRP OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 7}		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-98		-98	
N_{oc} ^{Note1}	dBm/SCS ^{Note4}	-89		-89	
PRS $\hat{E}_s/N_{oc}$	dB	-2	-10	-2	10
PRP ^{Note2}	dBm/SCS	-91		-91	-99

			-99		
PRS $\hat{E}_s/I_{ot}$	dB	-2.41	-12.12	-2.41	-12.12
I_o ^{Note2}	dBm/190.08 MHz Note4	-54.62		-54.62	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: PRP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: Void					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: Void					
Note 6: Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.7.11.1.3 Test Requirements

In each test, the absolute PRS-RSRP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.2.1 if the reported PRS-RSRP is in the range shown in table A.7.7.11.1.3-1. The relative PRS-RSRP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.2.2.

Table A.7.7.11.1.3-1: PRS-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
Cell 1	PRS_RP1 $-\delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq \text{PRS_RP1} + \delta + G_{max}$
Cell 2	PRS_RP2 $-\delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq \text{PRS_RP2} + \delta + G_{max}$
Note 1:	PRS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration.
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.24.2.1-2, selected according to the I_o used in the test.
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.6.1-1, selected according to the UE power class

A.7.7.11.2 SA measurement accuracy with PRS in FR2 with reduced sample number

A.7.7.11.2.1 Test Purpose and Environment

The purpose of this test is to verify that the accuracy of PRS-RSRP measurement with reduced sample number is within the specified limits. This test will verify the requirements in clauses 10.1.24.2.1 and 10.1.24.2.2.

A.7.7.11.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.11.2.2-1. Both absolute and relative accuracy of PRS-RSRP measurements are tested by using the parameters in Table A.7.7.11.2.2-2 and A.7.7.11.2.2-3. In all test cases, Cell 1 is the PCell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.11.2.2-1: PRS-RSRP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.7.11.2.2-2: PRS-RSRP general test parameters

Parameter	Unit	Test 1	
		Cell 1	Cell 2
Cell ID		489	0
SSB ARFCN		freq1	
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
BW _{channel}	MHz	200: N _{RB,C} = 132	
Downlink initial BWP configuration		DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-
DRX cycle configuration		Not applicable	-
Measurement gap		GP#13 or GP#24 ^{Note2}	
TRS configuration		TRS.2.1 TDD	-
TCI state		TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2
SMTc configuration		SMTc.1	SMTc.1
Time offset with Cell 1	μs	-	3
PRS configuration		PRS.1.4 FR2	PRS.1.4 FR2
PRS BW	RB	64	64
PRS Resource slot offset	slot	0	4
PDSCH/PDCCH subcarrier spacing	kHz	120	120
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG_DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG_DMRS ^{Note 1}			
Propagation conditions		AWGN	AWGN
Antenna configuration		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.			

Table A.7.7.11.2.2-3: PRS-RSRP OTA related test parameters

Parameter	Unit	Test 1	
		Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 7}		Rough	
N_{OC} ^{Note1}	dBm/15kHz ^{Note4}	-98	
N_{OC} ^{Note1}	dBm/SCS ^{Note4}	-89	

$\hat{E}_s / N_{oc}$	dB	2.23	-1.73
E_s	dBm/SCS ^{Note4}	-	-
PRS_RP ^{Note2}	dBm/SCS	-86.77	-90.73
SSB_RP ^{Note2}	dBm/SCS	-86.77	-90.73
$\hat{E}_s / I_{ot_BB}$ ^{Note6}	dB	0	-6
I_o ^{Note2}	dBm/190.08 MHz ^{Note4}	-51.76	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB_RP, PRS_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: Void Note 6: Calculation of E_s/I_{ot_BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4. Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 9: Calculation of E_s/I_{ot_BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.			

A.7.7.11.2.3 Test Requirements

In the test, the absolute PRS-RSRP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.2.1 if the reported PRS-RSRP is in the range shown in table A.7.7.11.2.3-1. The relative PRS-RSRP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.2.2.

Table A.7.7.11.2.3-1: PRS-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
Cell 1	$PRS_RP1 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq PRS_RP1 + \delta + G_{max}$
Cell 2	$PRS_RP2 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq PRS_RP2 + \delta + G_{max}$
Note 1:	PRS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration.
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.24.2.1-2, selected according to the I_o used in the test.
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.6.1-1, selected according to the UE power class

A.7.7.12 UE Rx-Tx time difference measurements

A.7.7.12.1 UE Rx-Tx time difference measurement accuracy for single positioning frequency layer in FR2 SA

A.7.7.12.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx time difference measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR2 in standalone scenario when single positioning frequency layer is configured.

The supported test configuration is listed in Table A.7.7.12.1.1-1.

Table A.7.7.12.1.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 200 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test.

The UE is configured with measurement gap pattern ID #13 or ID #24 before the test.

The UE is configured to transmit positioning SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The test equipment then compares the difference of these two timings to the UE Rx-Tx measurement reported by the UE for each cell.

A.7.7.12.1.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.7.7.12.1.2-1.

Table A.7.7.12.1.2-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
AoA setup		1	Setup 1 as specified in clause A.3.15		Setup 1 as specified in clause A.3.15	
Beam Assumption ^{Note 7}		1	Rough	Rough	Rough	Rough
Measurement gap		1	GP#24 or GP#13 ^{Note 8}		GP#24 or GP#13 ^{Note 8}	
DRX		1	OFF		OFF	
Time offset with Cell 1	μs	1	N/A	3	N/A	3
TDD configuration		1	TDDConf.3.1	TDDConf.3.1	TDDConf.3.1	TDDConf.3.1
PDSCH RMC configuration		1	SR.3.1 TDD	N/A	SR.3.1 TDD	N/A
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A	CR.3.1 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A	CCR.3.1 TDD	N/A
OCNG Patterns		1	OP.1	OP.1	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	1	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						

EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.2.1 TDD	N/A	TRS.2.1 TDD	N/A
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	N/A	DLBWP.0.1 ULBWP.0.1	N/A
Active DL BWP configuration		1	DLBWP.1.1	N/A	DLBWP.1.1	N/A
Active UL BWP configuration		1	ULBWP.1.1	N/A	ULBWP.1.1	N/A
PRS configuration		1	PRS.1.1 FR2	PRS.1.1 FR2	PRS.1.2 FR2	PRS.1.2 FR2
PRS Resource slot offset	slot	1	0	4	0	4
SRS configuration		1	POS-SRS.3	N/A	POS-SRS.3	N/A
N_{oc} ^{Note 2}	dBm/SCS	1	-89		-89	
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98		-98	
PRS $\hat{E}_s/I_{ot}$	dB	1	-2.41	-12.12	-2.41	-12.12
PRS $\hat{E}_s/N_{oc}$	dB	1	-2	-10	-2	-10
PRP ^{Note 3}	dBm/SCS kHz	1	-91	-99	-91	-99
I_o	dBm/190.08 MHz	1	-54.62	-54.62	-54.62	-54.62
Propagation Condition		1	AWGN		AWGN	

Note 1:	Void.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	PRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.
Note 9:	Calculation of E_s/I_{ot} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_p from TS 38.101-2 [19] Table 6.2.1.3-4.

Table A.7.7.12.1.2-2: Void**A.7.7.12.1.3 Test requirements**

The UE Rx-Tx time difference measurement fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.2 for both Cell 1 and Cell 2.

A.7.7.12.2 UE Rx-Tx time difference measurement accuracy with reduced number of samples in FR2 SA**A.7.7.12.2.1 Test purpose and environment**

The purpose of the test is to verify that the UE Rx-Tx time difference measurement accuracy with reduced number of samples is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR2 in standalone scenario when single positioning frequency layer is configured.

The supported test configuration is listed in Table A.7.7.12.2.1-1.

Table A.7.7.12.2.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 200 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR2.

The *NR-Multi-RTT-ProvideAssistanceData* and *NR-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test.

The UE is configured to measure UE Rx-Tx time difference using reduced number of samples via *reducedDL-PRS-ProcessingSamples* in *NR-Multi-RTT-RequestLocationInformation* during the test.

The UE is configured with measurement gap pattern ID #13 or ID #24 before the test.

The UE is configured to transmit positioning SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The test equipment then compares the difference of these two timings to the UE Rx-Tx measurement reported by the UE for each cell.

A.7.7.12.2.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.7.7.12.2.2-1.

Table A.7.7.12.2.2-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1	
			Cell 1	Cell 2
AoA setup		1	Setup 1 as specified in clause A.3.15	
Beam Assumption ^{Note 7}		1	Rough	Rough
Measurement gap		1	GP#24 or GP#13 ^{Note 8}	
DRX		1	OFF	
Time offset with Cell 1	μs	1	N/A	3
TDD configuration		1	TDDConf.3.1	TDDConf.3.1
PDSCH RMC configuration		1	SR.3.1 TDD	N/A
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
OCNG Patterns		1	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	1	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
EPRE ratio of PRS to SSS				
TRS Configuration		1	TRS.2.1 TDD	N/A
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	N/A
Active DL BWP configuration		1	DLBWP.1.1	N/A
Active UL BWP configuration		1	ULBWP.1.1	N/A
PRS configuration		1	PRS.1.1 FR2	PRS.1.1 FR2
PRS BW		1	64 PRBs	64 PRBs
PRS Resource slot offset	slot	1	0	4
SRS configuration		1	POS-SRS.3	N/A
N_{oc} ^{Note 2}	dBm/SCS	1	-89	
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98	
PRS $\hat{E}_s/I_{ot}$	dB	1	0	-6
PRS $\hat{E}_s/N_{oc}$	dB	1	2.23	-1.73

PRP ^{Note 3}	dBm/SCS kHz	1	-86.77	-90.73
Io	dBm/190.08 MHz	1	-51.76	-51.76
Propagation Condition		1	AWGN	
Note 1: Void.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: PRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: PRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone				
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				
Note 8: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.				

A.7.7.12.2.3 Test requirements

The UE Rx-Tx time difference measurement with reduced number of samples fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.2 for both Cell 1 and Cell 2.

A.7.7.12.3 UE Rx-Tx time difference measurement accuracy with RxTx TEG

A.7.7.12.3.1 Test purpose and environment

The purpose of the test is to verify that the relative UE Rx-Tx time difference measurement accuracy when the two measurements are within the same RxTx TEG is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR2 in standalone scenario when single positioning frequency layer is configured.

The supported test configuration is listed in Table A.7.7.12.3.1-1.

Table A.7.7.12.3.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 200 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test.

The UE is requested to provide the RxTx TEG in the test via *nr-UE-RxTxTEG-Request-r17* in *NR-Multi-RTT-RequestLocationInformation*.

The test applies to the UE supporting RxTx TEG defined in *NR-UE-TEG-Capability* and reporting the same RxTx TEG for the two UE Rx-Tx measurements.

The UE is configured with measurement gap pattern ID #13 or ID #24 before the test.

The UE is configured to transmit positioning SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The UE Rx-Tx time difference is derived by the difference of the receiving timing and the transmit timing for each cell.

A.7.7.12.3.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.7.7.12.3.2-1.

Table A.7.7.12.3.2-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
AoA setup		1	Setup 1 as specified in clause A.3.15		Setup 1 as specified in clause A.3.15	
Beam Assumption ^{Note 7}		1	Rough	Rough	Rough	Rough
Measurement gap		1	GP#24 or GP#13 ^{Note 8}		GP#24 or GP#13 ^{Note 8}	
DRX		1	OFF		OFF	
Time offset with Cell 1	μs	1	N/A	3	N/A	3
TDD configuration		1	TDDConf.3.1	TDDConf.3.1	TDDConf.3.1	TDDConf.3.1
PDSCH RMC configuration		1	SR.3.1 TDD	N/A	SR.3.1 TDD	N/A
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A	CR.3.1 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A	CCR.3.1 TDD	N/A
OCNG Patterns		1	OP.1	OP.1	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	1	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
EPRE ratio of PRS to SSS						

TRS Configuration		1	TRS.2.1 TDD	N/A	TRS.2.1 TDD	N/A
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	N/A	DLBWP.0.1 ULBWP.0.1	N/A
Active DL BWP configuration		1	DLBWP.1.1	N/A	DLBWP.1.1	N/A
Active UL BWP configuration		1	ULBWP.1.1	N/A	ULBWP.1.1	N/A
PRS configuration		1	PRS.1.1 FR2	PRS.1.1 FR2	PRS.1.2 FR2	PRS.1.2 FR2
PRS Resource slot offset	slot	1	0	4	0	4
SRS configuration		1	POS-SRS.3	N/A	POS-SRS.3	N/A
N_{oc} Note 2	dBm/SCS	1	-89		-89	
N_{oc} Note 2	dBm/15 kHz	1	-98		-98	
PRS $\hat{E}_s/I_{ot}$	dB	1	-6	-13	-6	-13
PRS $\hat{E}_s/N_{oc}$	dB	1	-5.7	-11.9	-5.7	-11.9
PRP Note 3	dBm/SCS kHz	1	-94.7	-100.9	-94.7	-100.9
I_o	dBm/190.08 MHz	1	-55.75	-55.75	-55.75	-55.75
Propagation Condition		1	AWGN		AWGN	
Note 1: Void.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: PRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: PRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 8: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.						
Note 9: Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.						

A.7.7.12.3.3 Test requirements

The relative accuracy is derived by the difference of the UE Rx-Tx measurements on the two cells.

The UE Rx-Tx time difference measurements for Cell 1 and Cell 2 fulfil the relative UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.2.

A.7.7.13 PRS-RSRPP measurements

A.7.7.13.1 SA measurement accuracy with PRS in FR2

A.7.7.13.1.1 Test Purpose and Environment

The purpose of this test is to verify that the accuracy of PRS-RSRPP measurement in RRC_CONNECTED is within the specified limits. This test will verify the requirements in clauses 10.1.38.2.

A.7.7.13.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.13.1.2-1. In all test cases, Cell 1 is the PCell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.13.1.2-1: PRS-RSRPP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.7.13.1.2-2: PRS-RSRPP general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	200: N _{RB,C} = 132		200: N _{RB,C} = 132	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-	DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
Measurement gap		GP#13 or GP#24 ^{Note2}			
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
Time offset with Cell 1	μs	-	3	-	3
PRS configuration		PRS.1.3 FR2	PRS.1.3 FR2	PRS.1.4 FR2	PRS.1.4 FR2
PRS Resource slot offset	slot	0	4	0	4
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					

EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Propagation conditions		Two-tap channel defined in 38.101-4 Annex B.2.4, $a = 1$, $\tau_d = 0.45 \mu s$ and $f_d = 5$ Hz			
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.					

Table A.7.7.13.1.2-3: PRS-RSRPP OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 7}		Rough		Rough	
N_{OC} ^{Note1}	dBm/15kHz ^{Note4}	-98		Same as Test 1	
N_{OC} ^{Note1}	dBm/SCS ^{Note4}	-89		Same as Test 1	
$\hat{E}_s / N_{OC}$	dB	-2	-10	-2	-10
E_s	dBm/SCS ^{Note4}	-	-	-	-
PRS_RP ^{Note2}	dBm/SCS	-91	-99	-91	-99
$\hat{E}_s / I_{ot_BB}$ ^{Note6}	dB	-2.41	-12.12	-2.41	-12.12
I_o ^{Note2}	dBm/190.08 MHz ^{Note4}	-54.62		-54.62	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: PRS_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: Void					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: Void					
Note 6: Calculation of $E_s/I_{ot_{BB}}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.7.13.1.3 Test Requirements

In each test, the absolute PRS-RSRPP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.38.2 if the reported PRS-RSRPP is in the range shown in table A.7.7.13.1.2-1.

Table A.7.7.13.1.3-1: PRS-RSRPP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
Cell 1	$\text{PRS_RSRPP1} - \delta + G_{\min} \leq \text{Reported RSRPP(dBm)} \leq \text{PRS_RSRPP1} + \delta + G_{\max}$
Cell 2	$\text{PRS_RSRPP2} - \delta + G_{\min} \leq \text{Reported RSRPP(dBm)} \leq \text{PRS_RSRPP2} + \delta + G_{\max}$
Note 1:	PRS_RSRPP _n is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration.
Note 2:	δ is the RSRPP absolute accuracy requirement from Table 10.1.38.2.1-2, selected according to the I_0 used in the test.
Note 3:	$G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.6.1-1, selected according to the UE power class

A.7.7.13.2 SA measurement accuracy with reduced PRS samples in FR2

A.7.7.13.2.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRPP measurement accuracy with $N_{\text{sample}} = 1$ in FR2 is within the specified limits. This test will verify the requirements in clauses 10.1.38.2.

The UE under test should support *supportedDL-PRS-ProcessingSamples-RRC-CONNECTED*, and the TE indicates the UE to perform positioning measurements with reduced number of samples. The PRS bandwidth is contained within the active BWP and the power difference between the serving cell SS-RSRP and neighbour cell PRS-RSRP is within 6 dB, so that $N_{\text{sample}} = 1$ is assumed.

A.7.7.13.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.7.13.2.2-1. In all test cases, Cell 1 is the PCell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.7.13.2.2-1: PRS-RSRPP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.7.13.2.2-2: PRS-RSRPP general test parameters

Parameter	Unit	Test 1	
		Cell 1	Cell 2
Cell ID		489	0
SSB ARFCN		freq1	
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
BW _{channel}	MHz	200: N _{RB,C} = 132	
Downlink initial BWP configuration		DLBWP.0.1	-
Downlink dedicated BWP configuration		DLBWP.1.1	-
Uplink initial BWP configuration		ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-
DRX cycle configuration		Not applicable	-
Measurement gap		GP#13 or GP#24 ^{Note2}	
TRS configuration		TRS.2.1 TDD	-
TCI state		TCI.State.0	-

PDSCH Reference measurement channel		SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1
Time offset with Cell 1	μs	-	3
PRS configuration		PRS.1.4 FR2	PRS.1.4 FR2
PRS bandwidth		48 PRBs	48 PRBs
PRS Resource slot offset	slot	0	4
PDSCH/PDCCH subcarrier spacing	kHz	120	120
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation conditions		Two-tap channel ^{Note3}	
Antenna configuration		1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: GP#24 is configured if UE supports MG#24, otherwise GP#13 is configured.			
Note 3: The two-tap channel model is defined in 38.101-4 Annex B.2.4 (a = 1, τ _d =0.45 μs and f _D =5 Hz).			

Table A.7.7.13.2.2-3: PRS-RSRPP OTA related test parameters

Parameter	Unit	Test 1	
		Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 7}		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-98	
N_{oc} ^{Note1}	dBm/SCS ^{Note4}	-89	
$\hat{E}_s / N_{oc}$	dB	2.23	-1.73
E_s	dBm/SCS ^{Note4}	-	-
PRS_RP ^{Note2}	dBm/SCS	-86.77	-90.73
SS_RP ^{Note2}	dBm/SCS	-86.77	-90.73
$\hat{E}_s / I_{ot_BB}$ ^{Note6}	dB	0	-6
I_o ^{Note2}	dBm/190.08 MHz ^{Note4}	-54.62	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: PRS_RP, SS_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3: Void			

Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 5:	Void
Note 6:	Calculation of $E_s/I_{ot_{BB}}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.7.7.13.2.3 Test Requirements

In each test, the absolute PRS-RSRPP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.38.2 if the reported PRS-RSRPP is in the range shown in table A.7.7.13.2.3-1.

Table A.7.7.13.2.3-1: PRS-RSRPP absolute accuracy test requirement

	Test requirement ^{Notes 1,2,3}
Cell 1	$PRS_RP1 - \delta + G_{min} \leq \text{Reported RSRPP(dBm)} \leq PRS_RP1 + \delta + G_{max}$
Cell 2	$PRS_RP2 - \delta + G_{min} \leq \text{Reported RSRPP(dBm)} \leq PRS_RP2 + \delta + G_{max}$
Note 1:	PRS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration.
Note 2:	δ is the RSRP absolute accuracy requirement from Table [10.1.24.Z.1-2], selected according to the I_o used in the test.
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.6.1-1, selected according to the UE power class

A.7.8 Measurement procedure in RRC_INACTIVE

A.7.8.1 RSTD measurements

A.7.8.1.1 NR RSTD measurement reporting delay test case for single positioning frequency layer in FR2 SA in RRC_INACTIVE state

A.7.8.1.1.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 5.6.2.5 in an environment with AWGN propagation conditions in FR2 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations are specified in Table A.7.8.1.1.1-1.

Table A.7.8.1.1.1-1: Supported test configurations for NR RSTD

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All cells are on the same RF channel distributed in single positioning frequency layers.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall be in RRC_CONNECTED state and shall not have any timing information of Cell 2 and Cell3. During T2 UE shall be in RRC_INACTIVE state and all cells transmit PRS resources within initial DL BWP of the UE and with the same numerology as the initial DL BWP.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance data* and location information request.

The beginning of the time interval T2 shall be aligned with the first DRX cycle containing a DL PRS resource(s).

The UE is configured with DRX cycle of 0.64s.

The general test parameters are listed in Table A.7.8.1.1.1-2, and cell specific test parameters are listed in Table A.7.8.1.1.1-3 and Table A.7.8.1.1.1-4.

Table A.7.8.1.1.1-2: General test parameters for RSTD measurement reporting delay

Parameter		Unit	Value	Comment
Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
BW _{channel}		MHz	200: N _{RB,c} = 132	
SSB configuration	Config 1		SSB.2 FR2	
SMTC configuration	Config 1		SMTC.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
RMSI CORESET RMC configuration	Config 1		CR.3.1 TDD	As specified in clause A.3.1.2.1
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
PRS Configuration	Config 1		PRS.1.4. FR2	As specified in clause A.3.31
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX		s	0.64	
Radio frame receive time offset between the cells at the UE antenna connector		μs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells

Expected RSTD	μs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator
Expected RSTD uncertainty for all neighbour cells	μs	5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		4	Including the reference cell
PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'	Corresponds to prs-MutingInfo defined in TS 37.355 [24]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	s	[1..28]	The length of the time interval that follows immediately after time interval T1
AoA setup		Setup 1	As defined in A.3.15.1
Beam assumption		Rough	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.8.1.1.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positioning frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.5 FDD	N/A	N/A
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-89		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
I_o ^{Note 4}	Config 1	dBm/190.08MHz	-54.00	-54.00	-54.00
SSB RP ^{Note 4}	Config 1	dBm/SCS	-89	-Infinity	-Infinity
$\hat{E}_s/N_{oc}$		dB	0	-Infinity	-Infinity
Propagation Condition			AWGN		

Note 1:	OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The resources for uplink transmission are assigned after the end of time period T2 to UEs that do not support SDT for measurement reporting.
Note 3:	Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 4:	SSB RP and Io levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.

Table A.7.8.1.1.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1	Cell 2	Cell 3
			T2	T2	T2
RF Channel Number			1	1	1
Positioning frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
PRACH configuration			FR2 PRACH configuration 1	FR2 PRACH configuration 1	FR2 PRACH configuration 1
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-89	-89	-89
$\hat{E}_s/N_{oc}$	Config 1	dB	-5.44	-11.67	-11.67
I _o	Config 1	dBm/19.08MHz	-55.48	-55.48	-55.48
$\hat{E}_s/I_{ot}$		dB	-6	-13	-13
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that active cells (all, except Cell 3 in T3) are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.					
Note 2: The resources for uplink transmission are assigned after the end of time period T2 to UEs that do not support SDT for measurement reporting.					
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					

A.7.8.1.1.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 5.6.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 5.6.2.5 starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be higher than the time duration above because of the uncertainty in acquiring the first available PRACH occasion to transition to RRC_CONNECTED state to report the measurements.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD_1970049.

A.7.8.1.2 NR RSTD measurement reporting delay test case with reduced number of samples in RRC_INACTIVE, FR1 SA

A.7.8.1.2.1 Test Purpose and Environment

The purpose of the test is to verify that the RSTD measurement meets the requirements specified in Clause 5.6.2 in an environment with AWGN propagation conditions in FR2 in standalone scenario when single-sample measurements are requested by the LMF. This test is applicable to UEs that support *supportedDL-PRS-ProcessingSamples-RRC-Inactive*.

The supported test configurations are specified in Table A.7.8.1.2.1-1.

Table A.7.8.1.2.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

In the test there are three synchronous cells: Cell 1, Cell 2 and Cell 3. Cell 1 is the reference as well as the PCell. Cell 2 and Cell 3 are the neighbour cells. All 3 cells are on the same RF channel in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. The UE shall be in RRC_CONNECTED state during T1 and in RRC_INACTIVE state during T2. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3. All three cells transmit PRS during T2. PRS resources from all three cells are transmitted within the initial DL BWP of the UE and with the same numerology as the initial DL BWP.

Note: The information on when PRS is muted is conveyed to the UE using PRS muting information.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle in RRC_INACTIVE.

The *NR-DL-TDOA-ProvideAssistanceData* and *nr-DL-TDOA-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-TDOA assistance* data and location information request.

The *nr-DL-TDOA-RequestLocationInformation* IE should indicate to the UE that single-sample measurements are requested, i.e. *requestedDL-PRS-ProcessingSamples-r17* is set to m1.

The general test parameters are listed in Table A.7.8.1.2.1-2, and cell specific test parameters are listed in Table A.7.8.1.2.1-3 and A.7.8.1.2.1-4.

Table A.7.8.1.2.1-2: General test parameters for RSTD measurement reporting delay

Parameter	Unit	Value	Comment
-----------	------	-------	---------

Reference cell			Cell 1	Reference cell is the cell in the DL-TDOA assistance data with respect to which the RSTD measurement is defined, as specified in TS 38.215 [4] and TS 37.355 [34]. The reference cell is the PCell in this test case.
Neighbor cells			Cell 2 and Cell 3	Cell 2 and Cell 3 appear at the first and second places in the neighbour cell list in the DL-TDOA assistance data.
SSB configuration	Config 1		SSB.2 FR2	
SMTC configuration	Config 1		SMTC.1	
Initial BWP configuration	Config 1		DLBWP.0.1 ULBWP.0.1	
PDSCH RMC configuration	Config 1		SR.1.1 FDD	
RMSI CORESET RMC configuration	Config 1		CR.3.1 TDD	As specified in clause A.3.1.2.1
Dedicated CORESET RMC configuration	Config 1		CR.1.1 FDD	
PRS Configuration	Config 1		PRS.1.2 FR2	As specified in clause A.3.31.
PRS Resource slot offset	Config 1	slots	Cell 1, 2, 3: 0	
Physical cell ID PCI			(PCI of Cell 1 – PCI of Cell 2)mod6=0 and (PCI of Cell 1 – PCI of Cell 3)mod6=0	The cell PCIs are selected such that the relative shifts of PRS patterns among cells are as given by the test parameters
CP length			Normal	
DRX cycle length		s	0.64	
Radio frame receive time offset between the cells at the UE antenna connector		μs	Cell 2 to Cell 1: 0 Cell 3 to Cell 1: 3	PRS are transmitted from synchronous cells
Expected RSTD		μs	Cell 2: 3 Cell 3: 3 Other neighbour cells: randomly between -3 and 3	The expected RSTD is what is expected at the receiver. The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD indicator

Expected RSTD uncertainty for all neighbour cells	μs	5	The corresponding parameter in the DL-TDOA assistance data specified in TS 37.355 [34] is the expectedRSTD-Uncertainty index
Number of cells provided in DL-TDOA assistance data		4	Including the reference cell
PRS muting info		Cell 1: '10' Cell 2: '01' Cell 3: '10'	Corresponds to prs-MutingInfo defined in TS 37.355 [24]
PRS resource RE offset		Cell 1: 0 Cell 2: 0 Cell 3: 1	Cell 1 and Cell 3 are configured with different resource offsets
T1	s	3	The length of the time interval from the beginning of each test
T2	s	[5]	The length of the time interval that follows immediately after time interval T1
AoA setup		Setup 1	As defined in A.3.15.1
Beam assumption		Rough	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

Table A.7.8.1.2.1-3: Cell-specific test parameters for RSTD measurement reporting delay during T1

Parameter		Unit	Cell 1	Cell 2	Cell 3
NR RF Channel Number			1	1	1
Positioning frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	N/A	N/A
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-89		
PRS $\hat{E}_s/N_{oc}$		dB	-Infinity	-Infinity	-Infinity
I_o ^{Note 4}	Config 1	dBm/190.08MHz	-54.00	-54.00	-54.00
SSB RP ^{Note4}	Config 1	dBm/SCS	-89	-Infinity	-Infinity
$\hat{E}_s/N_{oc}$		dB	0	-Infinity	-Infinity
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that active cell (Cell 1) is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 4: SSB RP and I_o levels have been derived from other parameters and are given for information purpose. These are not settable test parameters.					

Table A.7.8.1.2.1-4: Cell-specific test parameters for RSTD measurement reporting delay during T2

Parameter		Unit	Cell 1	Cell 2	Cell 3
			T2	T2	T2
RF Channel Number			1	1	1
Positioning frequency layer			1	1	1
Correlation Matrix and Antenna Configuration			1x2 Low	1x2 Low	1x2 Low
OCNG patterns defined in A.3.2.1			OP.1	OP.1	OP.1
PRACH configuration			FR2 PRACH configuration 1	FR2 PRACH configuration 1	FR2 PRACH configuration 1
N_{oc} ^{Note 3}	Config 1	dBm/SCS	-89	-89	-89
PRS $\hat{E}_s/N_{oc}$	Config 1	dB	1	-1.2	-1.2
I_o ^{Note 4}	Config 1	dBm/190.08MHz z	-51.23	-51.23	-51.23
PRS $\hat{E}_s/I_{ot}$		dB	-3	-6	-6
Propagation Condition			AWGN		
Note 1: OCNG shall be used such that all active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols, except for slots where PRS is transmitted by any of the cells.					
Note 2: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 3: Interference from other cells and noise sources not specified in the test are assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 4: I_o levels apply only for symbols where PRS is transmitted.					

A.7.8.1.2.2 Test Requirements

The RSTD measurement time fulfils the requirements specified in Clause 5.6.2.5.

The UE shall perform and report the RSTD measurements for Cell 2 and Cell 3 with respect to the reference cell in the DL-TDOA assistance data, Cell 1, within the time duration specified in section 5.6.2.5 starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be higher than the time duration above because of the uncertainty in acquiring the first available PRACH occasion to transition to RRC_CONNECTED state to report the measurements.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported RSTD measurement for each correct event shall be within the RSTD reporting range specified in Clause 10.1.23.3, i.e., between RSTD_0000000 and RSTD_1970049.

A.7.8.2 PRS-RSRP measurements

A.7.8.2.1 PRS-RSRP reporting delay test case for single positioning frequency layer in RRC_INACTIVE

A.7.8.2.1.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRP measurement requirements specified in Clause 5.6.3.5 for single positioning frequency layer under AWGN propagation conditions in RRC_INACTIVE. Supported test configurations are shown in table A.7.8.2.1.1-1

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2.

During T1 UE is in RRC_CONNECTED, the *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n. In the next DL slot after slot #n, UE is released into RRC_INACTIVE.

The beginning of the time interval T2 is the first PRS resource occasion occurring ΔT after the slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.81. 2.1.1-2, and table A.7.8.2.1.1-3.

Table A.7.8.2.1.1-1: supported test configurations for PRS RSRP measurement for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.8.2.1.1-2: General test parameters for PRS RSRP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
CP length		Config 1	Normal	
DRX		Config 1	0.64s	
Time offset between serving and neighbour cells		Config 1	3 μ s	Synchronous cells.
Expected RSTD	μ s	Config 1	3	

Expected RSTD uncertainty	μs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	[41]	

Table A.7.8.2.1.1-3: Cell-specific test parameters for PRS RSRP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
BW _{channel}		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP BW		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.2 FR2		PRS.1.2 FR2	
PRS muting configuration			Config 1	'10'		'01'	
EPRE ratio of PSS to SSS			Config 1	0	0		
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} ^{Note2}		dBm/15 kHz Note5		-98		-98	
N_{oc} ^{Note2}		dBm/S CS Note4	Config 1	-89		-89	

SS-RSRP ^{Note 3}	dBm/S CS Note5	Config 1	-91	-91	-Infinity	-99
PRS-RSRP ^{Note 3}	dBm/S CS Note5	Config 1	-Infinity	-91	-Infinity	-99
PRS $\hat{E}_s / I_{ot}$	dB	Config 1	-Infinity	-2.41	-Infinity	-12.12
PRS $\hat{E}_s / N_{oc}$	dB	Config 1	-Infinity	-2	-Infinity	-10
I_o ^{Note3}	dBm/19 0.08 MHz Note5	Config 1	-54.62		-54.62	
Propagation Condition		Config 1	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP/PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.7.8.2.1.2 Test Requirements

The PRS RSRP measurement time fulfils the requirements specified in Clause 5.6.3.5. The UE shall perform and report the PRS RSRP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 5.6.3.5 starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be higher than the time duration above because of the uncertainty in acquiring the first available PRACH occasion to transition to RRC_CONNECTED state to report the measurements.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRP measurement for each correct event shall be within the PRS RSRP reporting range specified in Clause 10.1.24.3, i.e., between PRS RSRP_0 and PRS RSRP_126.

A.7.8.2.2 PRS-RSRP reporting delay test case with reduced number of samples in RRC_INACTIVE

A.7.8.2.2.1 Test purpose and Environment

The purpose of the test is to verify that the PRS-RSRP measurement meets the delay requirements specified in clause 5.6.3.5 in an environment with AWGN propagation conditions when single-sample measurements are requested by the LMF. This test is applicable to UEs that support *supportedDL-PRS-ProcessingSamples-RRC-Inactive*.

The supported test configurations are specified in Table A.7. 8.2.2.1-1.

Table A.7.8.2.2.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cell. Both cells are on the same NR RF channel in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. The UE shall be in RRC_CONNECTED state during T1 and in RRC_INACTIVE state during T2. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2. PRS resources from both cells are transmitted within the initial DL BWP of the UE and with the same numerology as the initial DL BWP.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle in RRC_INACTIVE.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the *DL-AoD assistance data* and location information request.

The *nr-DL-AoD-RequestLocationInformation* IE should indicate to the UE that single-sample measurements are requested, i.e. requestedDL-PRS-ProcessingSamples-r17 is set to m1.

The general test parameters are listed in Table A.7.8.2.2.1-2, and cell specific test parameters are listed in Table A.7.8.2.2.1-3.

Table A.7.8.2.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX cycle length	s	Config 1	0.64	
Time offset between serving and neighbour cells		Config 1	3 μ s	Synchronous cells.
Expected RSTD	μ s	Config 1	3	

Expected RSTD uncertainty	μs	Config 1	5	
T1	s	Config 1	3	
T2	s	Config 1	[5]	

Table A.7.8.2.2.1-3: Cell specific test parameters

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
BW _{channel}		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP BW		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration ^{Note8}			Config 1	PRS.1.2 FR2		PRS.1.2 FR2	
PRS Resource slot offset		slots	Config 1	0		0	
PRS muting configuration			Config 1	'10'		'01'	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} ^{Note2}		dBm/15 kHz Note5		-98		-98	

N_{oc} ^{Note2}	dBm/S CS Note4	Config 1	-89		-89	
SS-RSRP ^{Note 3}	dBm/S CS Note5	Config 1	-89	-89	-89	-89
PRS-RSRP ^{Note 3}	dBm/S CS Note5	Config 1	-Infinity	-86.77	-Infinity	-90.73
PRS $\hat{E}_s / I_{ot}$	dB	Config 1	-Infinity	0	-Infinity	-6
PRS $\hat{E}_s / N_{oc}$	dB	Config 1	-Infinity	2.23	-Infinity	-1.73
I_o ^{Note3}	dBm/19 0.08 MHz Note5	Config 1	N/A	-51.76	N/A	-51.76
Propagation Condition		Config 1	AWGN			
Note 1: OCNG shall be used such that all active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols, except for slots where PRS is transmitted by any of the cells. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP/PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. I_o levels apply only for symbols where PRS is transmitted. Note 4: PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 8: Void.						

A.7.8.2.2.2 Test Requirements

The UE shall perform and report the PRS-RSRP measurements for Cell 1 and Cell 2, within the time limit specified in clause 5.6.3.5, starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be higher than the time duration above because of the uncertainty in acquiring the first available PRACH occasion to transition to RRC_CONNECTED state to report the measurements.

The rate of correct events observed during repeated tests shall be at least 90%.

A.7.8.3 UE Rx-Tx time difference measurements

A.7.8.3.1 UE Rx-Tx time difference measurements for single positioning frequency layer in FR2 SA

A.7.8.3.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement in RRC_INACTIVE state meets the requirements specified in clause 5.6.4 in AWGN propagation condition in FR2 in standalone scenario when single positioning frequency layer is configured.

The supported test configurations in listed in Table A.7.8.3.1.1-1.

Table A.7.8.3.1.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 200 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. Cell 1 and Cell 2 mute PRS transmission during T1 and transmit PRS during T2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n. In the next DL slot after slot #n, UE is released into RRC_INACTIVE.

The beginning of the time interval T2 is the first PRS resource occasion occurring ΔT after the slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The UE is configured to transmit positioning SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.8.3.1.1-2 and Table A.7.8.3.1.1-3 respectively.

Table A.7.8.3.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	Cell 1 is the PCell in <i>NR-Multi-RTT-ProvideAssistanceData</i> [34].
Neighbour cell		1	Cell 2	Cell 2 is a neighbour cell in <i>NR-Multi-RTT-ProvideAssistanceData</i> [34].
RF Channel Number		1	1	For both Cell 1 and Cell 2
BW _{channel}	MHz	1	200: N _{RB,C} = 132	
SSB configuration		1	SSB.2 FR2	
SMTC configuration		1	SMTC.1	
CP length		1	Normal	
DRX cycle		1	0.64s	
Time offset between serving and neighbour cells	μs	1	3	Synchronous cells
T1	s	1	5	
T2	s	1	20	

Table A.7.8.3.1.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}		1	Rough		Rough	
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	

OCNG Patterns		1	OP.1		OP.1	
EPRE ratio of PSS to SSS	dB	1	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
EPRE ratio of PRS to SSS						
TRS Configuration		1	TRS.2.1 TDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		N/A	
PRS configuration		1	PRS.1.1 FR2		PRS.1.1 FR2	
PRS muting info		1	'10'		'01'	
SRS configuration		1	POS-SRS.3		N/A	
N_{oc} ^{Note 2}	dBm/SCS	1	-89			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	-2.41	-Infinity	-12.12
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	-2	-Infinity	-10
PRP ^{Note 3}	dBm/SCS kHz	1	-Infinity	-91	-Infinity	-99
I_o	dBm/190.08 MHz	1	N/A	-54.62	N/A	-54.62
Propagation Condition		1	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: PRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: PRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 8: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						

A.7.8.3.1.2 Test requirements

The UE Rx-Tx time difference measurement time in RRC_INACTIVE state fulfils the requirements specified in clause 5.6.4.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time specified in clause 5.6.4 starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be higher than the time duration above because of the uncertainty in acquiring the first available PRACH occasion to transition to RRC_CONNECTED state to report the measurements.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.7.8.3.2 UE Rx-Tx time difference measurement with reduced number of samples in RRC_INACTIVE, FR2 SA

A.7.8.3.2.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx measurement meets the requirements specified in clause 5.6.4.5 in AWGN propagation condition in FR2 in standalone scenario when single-sample measurements are requested by the LMF. This test is applicable to UEs that support *supportedDL-PRS-ProcessingSamples-RRC-Inactive*.

The supported test configurations in listed in Table A.7.8.3.2.1-1.

Table A.7.8.3.2.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR2.

The test consists of two consecutive time intervals, with duration of T1 and T2. The UE shall be in RRC_CONNECTED state during T1 and in RRC_INACTIVE state during T2. During time duration T1, the UE shall not have any timing information of Cell 2. Both cells transmit PRS during T2. PRS resources from both cells are transmitted within the initial DL BWP of the UE and with the same numerology as the initial DL BWP.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle in RRC_INACTIVE.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE during T1. The last TTI containing the two messages shall be provided to the UE ΔT ms before the start of T2, where $\Delta T = 50$ ms is the maximum processing time of the multi-RTT assistance data and location information request.

The *nr-Multi-RTT-RequestLocationInformation* IE should indicate to the UE that single-sample measurements are requested, i.e. *requestedDL-PRS-ProcessingSamples-r17* is set to m1.

The UE is configured to transmit SRS during T2.

The general test parameters and cell specific test parameters are as given in Table A.7.8.3.2.1-2 and Table A.7.8.3.2.1-3 respectively.

Table A.7.8.3.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1	Cell 1	Cell 1 is the PCell in NR-Multi-RTT-ProvideAssistanceData [34].
Neighbour cell		1	Cell 2	Cell 2 is a neighbour cell in NR-Multi-RTT-ProvideAssistanceData [34].
RF Channel Number		1	1	For both Cell 1 and Cell 2
BW_{channel}	MHz	1	200: $N_{RB,C} = 132$	
SSB configuration		1	SSB.2 FR2	
SMTC configuration		1	SMTC.1	
CP length		1	Normal	
DRX cycle length	s	1	0.64	
Time offset between serving and neighbour cells	μs	1	3	Synchronous cells
T1	s	1	3	
T2	s	1	[5]	

Table A.7.8.3.2.1-3: Cell specific test parameters

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}		1	Rough		Rough	
TDD configuration		1	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		N/A	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
OCNG Patterns		1	OP.1		OP.1	
TRS Configuration		1	TRS.2.1 TDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		N/A	
PRS configuration ^{Note 9}		1	PRS.1.2 FR2		PRS.1.2 FR2	
PRS Resource slot offset	slots	1	0		0	
PRS muting info		1	'10'		'01'	
SRS configuration		1	POS-SRS.3		N/A	
N_{oc} ^{Note 2}	dBm/SCS	1	-89			
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98			
PRS $\hat{E}_s/I_{ot}$	dB	1	-Infinity	0	-Infinity	-6
PRS $\hat{E}_s/N_{oc}$	dB	1	-Infinity	2.23	-Infinity	-1.73
PRS-RSRP ^{Note 3}	dBm/SCS kHz	1	-Infinity	-86.77	-Infinity	-90.73
SS-RSRP ^{Note 3}	dBm/SCS kHz	1	-89	-86.77	-89	-90.73
Io	dBm/190.08 MHz	1	N/A	-51.76	N/A	-51.76
Propagation Condition		1	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP/PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. I_o levels apply only for symbols where PRS is transmitted.
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	OCNG shall be used such that all active cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols, except for slots where PRS is transmitted by any of the cells.
Note 9:	Void.

A.7.8.3.2.2 Test requirements

The UE Rx-Tx time difference measurement time fulfils the requirements specified in clause 5.6.4.5.

The UE shall perform and report the UE Rx-Tx time difference measurements for Cell 1 and Cell 2 within the specified UE Rx-Tx time difference measurement time starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be higher than the time duration above because of the uncertainty in acquiring the first available PRACH occasion to transition to RRC_CONNECTED state to report the measurements.

The rate of the correct events for each neighbour cell observed during repeated tests shall be at least 90%, where the reported UE Rx-Tx measurement for each correct event shall be within the UE Rx-Tx reporting range specified in clause 10.1.25.3.1.

A.7.8.4 PRS-RSRPP measurements

A.7.8.4.1 PRS-RSRPP reporting delay test case for single positioning frequency layer in FR2 in RRC_INACTIVE state

A.7.8.4.1.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRPP measurement requirements specified in Clause 5.6.5.5 for single positioning frequency layer under two-tap channel in standalone scenario. Supported test configurations are shown in table A.7.8.4.1.1-1.

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the Pcell.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall be in RRC_CONNECTED state and shall not have any timing information of Cell 2. During T2 UE shall be in RRC_INACTIVE state and both cells transmit PRS resources within initial DL BWP of the UE and with the same numerology as the initial DL BWP.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.8.4.1.1-2, and table A.7.8.4.1.1-3.

Table A.7.8.4.1.1-1: supported test configurations for PRS RSRPP measurement for FR2

Config	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.8.4.1.1-2: General test parameters for PRS RSRPP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX	s	Config 1	0.64	ON
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
Expected RSTD	μs	Config 1	3	
Expected RSTD uncertainty	μs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	7	

Table A.7.8.4.1.1-3: Cell-specific test parameters for PRS RSRPP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
BW _{channel}		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP BW		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	

	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
Dedicated CORESET RMC configuration			Config 1	CCR.3.1 TDD		-	
TRS configuration			Config 1	TRS.2.1 TDD		-	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
PRS configuration			Config 1	PRS.1.4 FR2		PRS.1.4 FR2	
PRS muting configuration			Config 1	'10'		'01'	
EPRE ratio of PSS to SSS			Config 1	0	0		
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}	dBm/15 kHz Note5			-98		-98	
N_{oc}^{Note2}	dBm/S CS Note4		Config 1	-89		-89	
SS-RSRP ^{Note 3}	dBm/S CS Note5		Config 1	-89	-91	-Infinity	-99
PRS-RSRP ^{Note 3}	dBm/S CS Note5		Config 1	-Infinity	-91	-Infinity	-99
PRS $\hat{E}_s/I_{ot}$	dB		Config 1	-Infinity	-2.41	-Infinity	-12.12
PRS $\hat{E}_s/N_{oc}$	dB		Config 1	-Infinity	-2	-Infinity	-10
I_0^{Note3}	dBm/19 0.08 MHz Note5		Config 1	-56.97	-54.62	-56.97	-54.62
Propagation Condition			Config 1	Two-tap channel defined in 38.101-4 Annex B.2.4, $a = 1$, $\tau_d = 0.45 \mu s$ and $f_D = 5$ Hz			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols other than those in the slots with transmitted PRS.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP/PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.8.4.1.2 Test Requirements

The PRS RSRPP measurement time fulfils the requirements specified in Clause 5.6.5.5. The UE shall perform and report the PRS RSRPP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 5.6.5.5 starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be higher than the time duration above because of the uncertainty in acquiring the first available PRACH occasion to transition to RRC_CONNECTED state to report the measurements. The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRPP measurement for each correct event shall be within the PRS RSRPP reporting range specified in Clause 10.1.X, i.e., between PRS RSRPP_0 and PRS RSRPP_126.

A.7.8.4.2 PRS-RSRPP reporting delay test with reduced number of samples for single positioning frequency layer in FR2 in RRC_INACTIVE state

A.7.8.4.2.1 Test Purpose and Environment

The purpose of the test is to verify the PRS RSRPP measurement requirements specified in Clause 5.6.5.5 for single positioning frequency layer under two-tap channel in standalone scenario for reduced number of samples. In this test UE that supports *supportedDL-PRS-ProcessingSamples-RRC-Inactive* is configured by LMF to perform PRS measurement with reduced number of samples. Supported test configurations are shown in table A.7.8.4.2.1-1.

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the Pcell.

The test consists of two consecutive time intervals, with duration of T1 and T2. During time duration T1, the UE shall be in RRC_CONNECTED state and shall not have any timing information of Cell 2. During T2 UE shall be in RRC_INACTIVE state and both cells transmit PRS resources within initial DL BWP of the UE and with the same numerology as the initial DL BWP.

The *NR-DL-AoD-RequestLocationInformation* message and *NR-DL-AoD-ProvideAssistanceData* message as defined in TS 37.355 shall be provided to the UE during T1. The last slot containing the two messages for the assistance data and location information request is denoted as #n.

The beginning of the time interval T2 shall be aligned with the beginning of the first DRX cycle containing the PRS resources that is ΔT after slot #n, where $\Delta T = 50$ ms is the maximum processing time of the assistance data and location information request.

The test parameters are as given in table A.7.8.4.2.1-2, and table A.7.8.4.2.1-3.

Table A.7.8.4.2.1-1: supported test configurations for PRS RSRPP measurement for FR2

Config	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.8.4.2.1-2: General test parameters for PRS RSRPP measurement reporting delay

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Active cell		Config 1	NR cell 1 (Pcell)	Cell 1 is the PCell and the DL-AoD reference cell in the positioning assistance data.
Neighbour cell		Config 1	NR cell 2	Cell 2 is a neighbour cell in the positioning assistance data.
SMTC parameters		Config 1	SMTC.1	As specified in clause A.3.11
SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX	s	Config 1	0.64	ON
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
Expected RSTD	μs	Config 1	3	
Expected RSTD uncertainty	μs	Config 1	5	
T1	s	Config 1	5	
T2	s	Config 1	7	

Table A.7.8.4.2.1-3: Cell-specific test parameters for PRS RSRPP measurement reporting delay

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1	Rough		Rough	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode			Config 1	TDD		TDD	
BW _{channel}		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP BW		MHz	Config 1	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	

PDSCH Reference measurement channel		Config 1	SR.3.1 TDD	-		
CORESET Reference Channel		Config 1	CR.3.1 TDD	-		
Dedicated CORESET RMC configuration		Config 1	CCR.3.1 TDD	-		
TRS configuration		Config 1	TRS.2.1 TDD	-		
PDSCH/PDCCH subcarrier spacing	kHz	Config 1	120	120		
PRS configuration		Config 1	PRS.1.4 FR2	PRS.1.4 FR2		
PRS BW		Config 1	48 PRBs	48 PRBs		
PRS muting configuration		Config 1	'10'	'01'		
EPRE ratio of PSS to SSS		Config 1	0	0		
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15 kHz Note5		-98	-98		
N_{oc}^{Note2}	dBm/S CS Note4	Config 1	-89	-89		
SS-RSRP ^{Note 3}	dBm/S CS Note5	Config 1	-89	-86.77	- Infinity	-90.73
PRS-RSRP ^{Note 3}	dBm/S CS Note5	Config 1	- Infinity	-86.77	- Infinity	-90.73
$PRS \hat{E}_s / I_{ot}$	dB	Config 1	- Infinity	0	- Infinity	-6
$PRS \hat{E}_s / N_{oc}$	dB	Config 1	- Infinity	2.23	- Infinity	-1.73
I_0^{Note3}	dBm/19.08 MHz Note5	Config 1	-54.00	-51.76	-54.00	-51.76
Propagation Condition		Config 1	Two-tap channel defined in 38.101-4 Annex B.2.4, $a = 1$, $\tau_d = 0.45 \mu s$ and $f_D = 5$ Hz			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP/PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

A.7.8.4.2.2 Test Requirements

The PRS RSRPP measurement time fulfils the requirements specified in Clause 5.6.5.5. The UE shall perform and report the PRS RSRPP measurements for Cell 2 with respect to the reference cell in the DL-AoD assistance data, Cell 1, within the time duration specified in section 5.6.5.5 starting from the beginning of time interval T2.

NOTE: The actual overall delays measured in the test may be higher than the time duration above because of the uncertainty in acquiring the first available PRACH occasion to transition to RRC_CONNECTED state to report the measurements.

The rate of the correct events for the neighbour cell observed during repeated tests shall be at least 90%, where the reported PRS RSRPP measurement for each correct event shall be within the PRS RSRPP reporting range specified in Clause 10.1.38, i.e., between PRS RSRPP_0 and PRS RSRPP_126.

A.7.9 Measurement performance requirements in RRC_INACTIVE

A.7.9.1 RSTD measurements

A.7.9.1.1 RSTD measurement accuracy test case for single positioning frequency layer in FR2 in RRC_INACTIVE state

A.7.9.1.1.1 Test purpose and Environment

The purpose of the test is to verify that the RSTD measurement in RRC_INACTIVE state meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions.

The supported test configurations are specified in Table A.7.9.1.1.1-1.

Table A.7.9.1.1.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cells. Both cells are on the same NR RF channel in FR2. The UE is configured with DRX cycle of 0.64s. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 5.6.2.5.

Table A.7.9.1.1.1-2: RSTD accuracy test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTc configuration		SMTc.1	SMTc.1	SMTc.1	SMTc.1
PRS configuration		PRS.1.1 FR2	PRS.1.1 FR2	PRS.1.2 FR2	PRS.1.2 FR2
PRS Resource slot offset	slot	0	4	0	4
Expected RSTD	μs	N/A	3	N/A	3
Expected RSTD uncertainty	μs	N/A	5	N/A	5
Time offset with Cell 1	μs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table A.7.9.1.1.1-3: RSTD accuracy OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 5}		Rough		Rough	
N_{OC} ^{Note1}	dBm/SCS ^{Note3}	-89		-89	
$\hat{E}_s / N_{OC}$	dB	-5.7	-11.9	-5.7	-11.9
PRS-RSRP ^{Note2}	dBm/SCS	-94.7	-100.9	-94.7	-100.9
$\hat{E}_s / I_{ot_{BB}}$ ^{Note4}	dB	-6	-13	-6	-13
I_o ^{Note2}	dBm/190.0 8 MHz ^{Note3}	-55.75	-55.75	-55.75	-55.75
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{OC} to be fulfilled. Note 2: SSB_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 4: Calculation of $E_s/I_{ot_{BB}}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4. Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.9.1.1.2 Test Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.7.9.1.2 RSTD measurement accuracy test case with reduced number of samples for single positioning frequency layer in FR2 in RRC_INACTIVE state**A.7.9.1.2.1 Test purpose and Environment**

The purpose of the test is to verify that the RSTD measurement in RRC_INACTIVE state meets the accuracy requirements specified in clause 10.1.23.2 in an environment with AWGN propagation conditions. In this test UE that supports *supportedDL-PRS-ProcessingSamples-RRC-Inactive* is configured by LMF to perform PRS measurement with reduced number of samples.

The supported test configurations are specified in Table A.7.9.1.2.1-1.

Table A.7.9.1.2.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

In the test there are two synchronous cells: Cell 1 and Cell 2. Cell 1 is the reference as well as the PCell. Cell 2 is a neighbour cells. Both cells are on the same NR RF channel in FR2. The UE is configured with DRX cycle of 0.64s. The *NR-TDOA-ProvideAssistanceData* and *NR-TDOA-RequestLocationInformation* message as defined in TS 37.355 shall be provided to the UE before the start of the test. The test duration should be larger than the UE measurement period as defined in clause 5.6.2.5.

Table A.7.9.1.2.1-2: RSTD accuracy test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
PRS ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
Downlink initial BWP configuration		DLBWP.0.1	DLBWP.0.1	DLBWP.0.1	DLBWP.0.1
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
Uplink dedicated BWP configuration		ULBWP.1.1	-	ULBWP.1.1	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
PRS configuration		PRS.1.3 FR2	PRS.1.3 FR2	PRS.1.4 FR2	PRS.1.4 FR2
PRS BW		64 PRBs	64 PRBs	128 PRBs	128 PRBs
PRS Resource slot offset	slot	0	4	0	4
Expected RSTD	μs	N/A	3	N/A	3
Expected RSTD uncertainty	μs	N/A	5	N/A	5
Time offset with Cell 1	μs	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table A.7.9.1.2.1-3: RSTD accuracy OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
A.7.9.1.2.2 Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 5}		Rough		Rough	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-89		-89	
$\hat{E}_s / N_{oc}$	dB	-1.44	-3.65	-1.44	-3.65
PRS-RSRP ^{Note2}	dBm/SCS	-90.44	-92.65	-90.44	-92.65
SS-RSRP ^{Note2}	dBm/SCS	-90.44	-92.65	-90.44	-92.65
$\hat{E}_s / I_{ot_BB}$ ^{Note4}	dB	-3	-6	-3	-6
I_o ^{Note2}	dBm/190.0 8 MHz ^{Note3}	-53.68	-53.68	-53.68	-53.68
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 4: Calculation of E_s/I_{ot_BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4. Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

Requirements

The RSTD measurement accuracy for Cell 2 shall fulfil the absolute requirement in clause 10.1.23.2.

A.7.9.2 PRS-RSRP measurements

A.7.9.2.1 SA measurement accuracy with PRS in FR2 in RRC_INACTIVE

A.7.9.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRP measurement accuracy in RRC_INACTIVE is within the specified limits. This test will verify the requirements in clauses 10.1.24.2.1 and 10.1.24.2.2.

A.7.9.2.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.9.2.1.2-1. Both absolute and relative accuracy of PRS-RSRP measurements are tested by using the parameters in Table A.7.9.2.1.2-2 and A.7.9.2.1.2-3. In all test cases, Cell 1 is the PCell.

Table A.7.9.2.1.2-1: PRS-RSRP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.9.2.1.2-2: PRS-RSRP general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
DRX cycle configuration		1.28s	-	1.28s	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTTC configuration		SMTTC.1	SMTTC.1	SMTTC.1	SMTTC.1
Time offset with Cell 1	μs	-	3	-	3
PRS configuration		PRS.1.3 FR2	PRS.1.3 FR2	PRS.1.4 FR2	PRS.1.4 FR2
PRS Resource slot offset	slot	0	4	0	4
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table A.7.9.2.1.2-3: PRS-RSRP OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 7}		Rough		Rough	

N_{OC} Note1	dBm/15kHz ^{Note4}	-98		Same as Test 1	
N_{OC} Note1	dBm/SCS ^{Note4}	-89		Same as Test 1	
$\hat{E}_s / N_{OC}$	dB	-2	-10	-2	-10
E_s	dBm/SCS ^{Note4}	-	-	-	-
PRS_RP ^{Note2}	dBm/SCS	-91	-99	-91	-99
$\hat{E}_s / I_{ot_BB}$ Note6	dB	-2.41	-12.12	-2.41	-12.12
I_o ^{Note2}	dBm/190.08 MHz Note4	-54.62		-54.62	

Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: PRS_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: Void

Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone

Note 5: Void

Note 6: Calculation of E_s/I_{ot_BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.

Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.7.9.2.1.3 Test Requirements

In each test, the absolute PRS-RSRP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.2.1 if the reported PRS-RSRP is in the range shown in table A.7.9.2.1.3-1. The relative PRS-RSRP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.2.2.

Table A.7.9.2.1.3-1: PRS-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
Cell 1	$\text{PRS_RP1} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{PRS_RP1} + \delta + G_{\max}$
Cell 2	$\text{PRS_RP2} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{PRS_RP2} + \delta + G_{\max}$
Note 1:	PRS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration.
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.24.2.1-2, selected according to the I_o used in the test.
Note 3:	$G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.6.1-1, selected according to the UE power class

A.7.9.2.2 PRS-RSRP measurements with reduced number of sample in RRC_INACTIVE

A.7.9.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.24.2.1 and 10.1.24.2.2.

A.7.9.2.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.9.2.2.2-1. Both absolute and relative accuracy of PRS-RSRP measurements are tested by using the parameters in Table A.7.9.2.2.2-2 and A.7.9.2.2.2-3. In all test cases, Cell 1 is the PCell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.7.9.2.2.2-1.

Table A.7.9.2.2.2-1: PRS-RSRP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.9.2.2.2-2: PRS-RSRP general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	200: N _{RB,c} = 132		200: N _{RB,c} = 132	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
DRX cycle configuration	s	0.64			
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
Time offset with Cell 1	μs	-	3	-	3
PRS configuration		PRS.1.3 FR2	PRS.1.3 FR2	PRS.1.4 FR2	PRS.1.4 FR2
PRS BW		48 PRBs	48 PRBs	48 PRBs	48 PRBs
PRS Resource slot offset	slot	0	4	0	4
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					

EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
EPRE ratio of PRS to SSS					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					

Table A.7.9.2.2.3: PRS-RSRP OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 7}		Rough		Rough	
N_{OC} ^{Note1}	dBm/15kHz ^{Note4}	-98		Same as Test 1	
N_{OC} ^{Note1}	dBm/SCS ^{Note4}	-89		Same as Test 1	
$\hat{E}_s / N_{OC}$	dB	2.23	-1.73	2.23	-1.73
E_s	dBm/SCS ^{Note4}	-	-	-	-
PRS_RP ^{Note2}	dBm/SCS	-86.77	-90.73	-86.77	-90.73
$\hat{E}_s / I_{ot_BB}$ ^{Note6}	dB	0	-6	0	-6
I_O ^{Note2}	dBm/190.08 MHz ^{Note4}	-51.76		-51.76	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: PRS_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: Void					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: Void					
Note 6: Calculation of $E_s/I_{ot_{BB}}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.9.2.2.3 Test Requirements

In each test, the absolute PRS-RSRP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.24.2.1 if the reported PRS-RSRP is in the range shown in table A.7.9.2.2.3-1. The relative PRS-RSRP measurement between the two PRS resources within the same cell shall fulfil the relative accuracy requirement in clause 10.1.24.2.2.

Table A.7.9.2.2.3-1: PRS-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
Cell 1	$PRS_RP1 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq PRS_RP1 + \delta + G_{max}$

	Cell 2	$\text{PRS_RP2} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{PRS_RP2} + \delta + G_{\max}$
Note 1:	PRS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration.	
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.24.2.1-2, selected according to the I_o used in the test.	
Note 3:	$G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.6.1-1, selected according to the UE power class	

A.7.9.3 UE Rx-Tx time difference measurements

A.7.9.3.1 UE Rx-Tx time difference measurements in RRC_INACTIVE

A.7.9.3.1.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx time difference measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR2 in standalone scenario.

The supported test configuration is listed in Table A.7.9.3.1.1-1.

Table A.7.9.3.1.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 200 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). All cells are on the same RF channel in FR2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test.

The UE is configured to transmit SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The test equipment then compares the difference of these two timings to the UE Rx-Tx measurement reported by the UE for each cell.

A.7.9.3.1.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.7.9.3.1.2-1.

Table A.7.9.3.1.2-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
AoA setup		1	Setup 1 as specified in clause A.3.15		Setup 1 as specified in clause A.3.15	
Beam Assumption ^{Note 7}		1	Rough	Rough	Rough	Rough
DRX	s	1	0.64		0.64	
Time offset with Cell 1	μs	1	N/A	3	N/A	3
TDD configuration		1	TDDConf.3.1	TDDConf.3.1	TDDConf.3.1	TDDConf.3.1
PDSCH RMC configuration		1	SR.3.1 TDD	N/A	SR.3.1 TDD	N/A

RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A	CR.3.1 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A	CCR.3.1 TDD	N/A
OCNG Patterns		1	OP.1	OP.1	OP.1	OP.1
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	N/A	DLBWP.0.1 ULBWP.0.1	N/A
PRS configuration		1	PRS.1.1 FR2	PRS.1.2 FR2	PRS.1.1 FR2	PRS.1.2 FR2
PRS Resource slot offset	slot	1	0	4	0	4
SRS configuration		1	POS-SRS.3	N/A	POS-SRS.3	N/A
N_{oc} Note 2	dBm/SCS	1	-89		-89	
N_{oc} Note 2	dBm/15 kHz	1	-98		-98	
PRS $\hat{E}_s/I_{ot}$	dB	1	-2.41	-12.12	-2.41	-12.12
PRS $\hat{E}_s/N_{oc}$	dB	1	-2	-10	-2	-10
PRS-RSRP Note 3	dBm/SCS kHz	1	-91	-99	-91	-99
I_o	dBm/190.08 MHz	1	-54.62	-54.62	-54.62	-54.62
Propagation Condition		1	AWGN		AWGN	
Note 1:	Void.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	PRS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	PRS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone					
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					
Note 8:	Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.					

A.7.9.3.1.3 Test requirements

The UE Rx-Tx time difference measurement time fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.2 for both Cell 1 and Cell 2.

A.7.9.3.2 UE Rx-Tx time difference measurement accuracy with reduced number of samples in FR2 SA

A.7.9.3.2.1 Test purpose and environment

The purpose of the test is to verify that the UE Rx-Tx time difference measurement accuracy with reduced number of samples in RRC_INACTIVE state is within the specified limits. This test will verify the requirements in clause 10.1.25.2. The test is conducted in AWGN propagation condition in FR2 in standalone scenario when single positioning frequency layer is configured.

The supported test configuration is listed in Table A.7.9.3.2.1-1.

Table A.7.9.3.2.1-1: Supported test configurations

Config	Description
1	120 kHz SSB and PRS SCS, 200 MHz bandwidth, TDD duplex mode

There are two cells in the test: PCell (Cell 1) and a neighbour cell (Cell 2). Both cells are on the same RF channel in FR2.

The *NR-Multi-RTT-ProvideAssistanceData* and *nr-Multi-RTT-RequestLocationInformation* as defined in TS 37.355 [34, clause 6.5.12.1], shall be provided to the UE before the start of the test. The UE is configured to measure UE Rx-Tx time difference using reduced number of samples via *requestedDL-PRS-ProcessingSamples* in *NR-Multi-RTT-RequestLocationInformation*.

UE shall be configured to enter into RRC_INACTIVE state before the start of the test.

The UE is configured to transmit positioning SRS on Cell 1 during the test.

The test equipment measures the transmit timing of the UE using the transmitted SRS and measures the receive timing using the PRS. The test equipment then compares the difference of these two timings to the UE Rx-Tx measurement reported by the UE for each cell.

A.7.9.3.2.2 Test parameters

The UE Rx-Tx time difference accuracy test parameters are given in Table A.7.9.3.2.2-1.

Table A.7.9.3.2.2-1: UE Rx-Tx time difference measurement accuracy test parameters

Parameter	Unit	Test configuration	Test 1	
			Cell 1	Cell 2
AoA setup		1	Setup 1 as specified in clause A.3.15	
Beam Assumption ^{Note 7}		1	Rough	Rough
DRX cycle		1	0.64s	
Time offset with Cell 1	μs	1	N/A	3
TDD configuration		1	TDDConf.3.1	TDDConf.3.1
PDSCH RMC configuration		1	SR.3.1 TDD	N/A
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
OCNG Patterns		1	OP.1	OP.1
EPRE ratio of PSS to SSS	dB	1	0	0

EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
EPRE ratio of PRS to SSS				
TRS Configuration				
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1	N/A
PRS configuration		1	PRS.1.1 FR2	PRS.1.1 FR2
PRS BW		1	64 PRBs	64 PRBs
PRS Resource slot offset	slot	1	0	4
SRS configuration		1	POS-SRS.3	N/A
N_{oc} ^{Note 2}	dBm/SCS	1	-89	
N_{oc} ^{Note 2}	dBm/15 kHz	1	-98	
PRS $\hat{E}_s/I_{ot}$	dB	1	0	-6
PRS $\hat{E}_s/N_{oc}$	dB	1	2.23	-1.73
PRP ^{Note 3}	dBm/SCS kHz	1	-86.77	-90.73
I_o	dBm/190.08 MHz	1	-51.76	-51.76
Propagation Condition		1	AWGN	
Note 1: Void.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: PRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: PRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone				
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				
Note 8: Calculation of $E_s/I_{ot_{BB}}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.				

A.7.9.3.2.3 Test requirements

The UE Rx-Tx time difference measurement with reduced number of samples in RRC_INACTIVE state fulfils the UE Rx-Tx measurement accuracy requirements specified in clause 10.1.25.2 for both Cell 1 and Cell 2.

A.7.9.4 PRS-RSRPP measurements

A.7.9.4.1 SA measurement accuracy in FR2 in RRC INACTIVE

A.7.9.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRPP measurement accuracy in RRC_INACTIVE state is within the specified limits. This test will verify the requirements in clauses 10.1.38.2.

A.7.9.4.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.9.4.1.2-1. In all test cases, Cell 1 is the PCell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.7.9.4.1.2-1.

Table A.7.9.4.1.2-1: PRS-RSRPP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.9.4.1.2-2: PRS-RSRPP general test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	200; N _{RB,c} = 132		200; N _{RB,c} = 132	
Downlink initial BWP configuration		DLBWP.0.1	-	DLBWP.0.1	-
Uplink initial BWP configuration		ULBWP.0.1	-	ULBWP.0.1	-
DRX cycle configuration	ms	640			
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Control channel RMC		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1	SMTC.1	SMTC.1
Time offset with Cell 1	μs	-	3	-	3
PRS configuration		PRS.1.3 FR2	PRS.1.3 FR2	PRS.1.4 FR2	PRS.1.4 FR2
PRS Resource slot offset	slot	0	4	0	4
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0

EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Propagation conditions		Two-tap channel ^{Note 2}		
Antenna configuration		1x2		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: The two-tap channel model is defined in 38.101-4 Annex B.2.4 ($\alpha = 1$, $\tau_d=0.45$ us and $f_D=5$ Hz).				

Table A.7.9.4.1.2-3: PRS-RSRPP OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 7}		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-98		Same as Test 1	
N_{oc} ^{Note1}	dBm/SCS ^{Note4}	-89		Same as Test 1	
$\hat{E}_s / N_{oc}$	dB	-2	-10	-2	-10
E_s	dBm/SCS ^{Note4}	-	-	-	-
PRS_RP ^{Note2}	dBm/SCS	-91	-99	-91	-99
$\hat{E}_s / I_{ot_BB}$ ^{Note6}	dB	-2.41	-12.12	-2.41	-12.12
I_o ^{Note2}	dBm/190.08 MHz ^{Note4}	-54.62		-54.62	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: PRS_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: Void Note 6: Calculation of $E_s/I_{ot_{BB}}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4. Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.7.9.4.1.3 Test Requirements

In each test, the absolute PRS-RSRPP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.38.2. if the reported PRS-RSRPP is in the range shown in table A.7.9.4.1.3-1.

Table A.7.9.4.1.3-1: PRS-RSRPP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
Cell 1	$\text{PRS_RSRPP1} - \delta + G_{\min} \leq \text{Reported RSRPP(dBm)} \leq \text{PRS_RSRPP1} + \delta + G_{\max}$
Cell 2	$\text{PRS_RSRPP2} - \delta + G_{\min} \leq \text{Reported RSRPP(dBm)} \leq \text{PRS_RSRPP2} + \delta + G_{\max}$
Note 1:	PRS_RSRPP _n is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration.
Note 2:	δ is the RSRPP absolute accuracy requirement from Table 10.1.38.2.1-2, selected according to the I_0 used in the test.
Note 3:	$G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.6.1-1, selected according to the UE power class

A.7.9.4.2 SA measurement accuracy with reduced PRS samples in FR2 in RRC INACTIVE

A.7.9.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the PRS-RSRPP measurement accuracy with $N_{\text{sample}} = 1$ in FR2 in RRC_INACTIVE state is within the specified limits. This test will verify the requirements in clause 10.1.38.2. The UE under test should support *supportedDL-PRS-ProcessingSamples-RRC-Inactive*, and the TE indicates the UE to perform positioning measurements with reduced number of samples. The PRS bandwidth is contained within the initial DL BWP and the power difference between the serving cell SS-RSRP and neighbour cell PRS-RSRP is within 6dB, so that $N_{\text{sample}} = 1$ is assumed.

A.7.9.4.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.7.9.4.2.2-1. In all test cases, Cell 1 is the PCell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.7.9.4.2.2-1: PRS-RSRPP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 200 MHz bandwidth, TDD duplex mode

Table A.7.9.4.2.2-2: PRS-RSRPP general test parameters

Parameter	Unit	Test 1	
		Cell 1	Cell 2
Cell ID		489	0
SSB ARFCN		freq1	
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
BW _{channel}	MHz	200; $N_{\text{RB},c} = 132$	
Downlink initial BWP configuration		DLBWP.0.1	-
Uplink initial BWP configuration		ULBWP.0.1	-
DRX cycle configuration	ms	640	
TRS configuration		TRS.2.1 TDD	-
TCI state		TCI.State.0	-
PDSCH Reference measurement channel		SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-

Control channel RMC		CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2
SMTC configuration		SMTC.1	SMTC.1
Time offset with Cell 1	μs	-	3
PRS configuration		PRS.1.4 FR2	PRS.1.4 FR2
PRS bandwidth		64 PRBs	64 PRBs
PRS Resource slot offset	slot	0	4
PDSCH/PDCCH subcarrier spacing	kHz	120	120
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation conditions		Two-tap channel ^{Note 2}	
Antenna configuration		1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: The two-tap channel model is defined in 38.101-4 Annex B.2.4 ($\alpha = 1$, $\tau_d=0.45 \mu\text{s}$ and $f_D=5 \text{ Hz}$).			

Table A.7.9.4.2.2-3: PRS-RSRPP OTA related test parameters

Parameter	Unit	Test 1	
		Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 7}		Rough	
N_{OC} ^{Note1}	dBm/15kHz ^{Note4}	-98	
N_{OC} ^{Note1}	dBm/SCS ^{Note4}	-89	
$\hat{E}_s / N_{oc}$	dB	2.23	-1.73
E_s	dBm/SCS ^{Note4}	-	-
PRS_RP ^{Note2}	dBm/SCS	-86.77	-90.73
SS_RP ^{Note2}	dBm/SCS	-86.77	-90.73
$\hat{E}_s / I_{ot_BB}$ ^{Note6}	dB	0	-6
I_o ^{Note2}	dBm/190.08 MHz ^{Note4}	-51.76	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: PRS_RP, SS_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3: Void			
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone			
Note 5: Void			

Note 6:	Calculation of E_s/lot_{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.7.9.4.2.3 Test Requirements

In each test, the absolute PRS-RSRPP measurement for each cell shall fulfil the absolute accuracy requirement in clause 10.1.38.2 if the reported PRS-RSRPP is in the range shown in table A.7.9.4.2.3-1.

Table A.7.9.4.2.3-1: PRS-RSRPP absolute accuracy test requirement

	Test requirement Notes 1,2,3
Cell 1	$PRS_RSRPP1 - \delta + G_{min} \leq \text{Reported RSRPP(dBm)} \leq PRS_RSRPP1 + \delta + G_{max}$
Cell 2	$PRS_RSRPP2 - \delta + G_{min} \leq \text{Reported RSRPP(dBm)} \leq PRS_RSRPP2 + \delta + G_{max}$
Note 1:	PRS_RSRPPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration.
Note 2:	δ is the RSRPP absolute accuracy requirement from Table 10.1.38.2.1-2, selected according to the I_o used in the test.
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.6.1-1, selected according to the UE power class

A.8 E-UTRA standalone tests for NR RRM

Editor notes: All NR RRM tests under E-UTRA standalone operations are included in this Annex. All EN-DC related NR RRM tests are in A.4 and A.5.

A.8.1 Void

A.8.2 RRC_IDLE state mobility

A.8.2.1 Inter-RAT NR Cell re-selection

A.8.2.1.1 E-UTRA Cell reselection to higher priority NR target Cell in FR1

A.8.2.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the E-UTRAN to NR inter-RAT cell reselection requirements specified in clause 4.2.2.5.6 in TS 36.133 [15].

The test scenario comprises of 1 E-UTRA cell and 1 NR cell as given in tables A.8.2.1.1.1-1, A.8.2.1.1.1-2, A.8.2.1.1.1-3 and A.8.2.1.1.1-4. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. E-UTRA cell 1 is already identified by the UE prior to the start of the test. Cell 2 is of higher priority than cell 1.

Table A.8.2.1.1.1-1: Supported test configurations

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.2.1.1.1-2: General test parameters for E-UTRA cell re-selection FR1 NR cell test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE camps on cell 2 in the initial phase
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell1	
T1 end condition	Active cell			Cell1	During T1 period the UE reselects to cell 1
	Neighbour cell			Cell2	
T3 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T3
	Neighbour cell		1, 2, 3, 4, 5, 6	Cell1	
RF Channel Number			1, 2, 3, 4, 5, 6	1, 2	E-UTRAN radio channel (1) and NR radio channel (2) are used for this test
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2, 5	3 μ s	Synchronous cells
			3, 6	3 μ s	Synchronous cells
Access Barring Information		-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.

DRX cycle length	s	1, 2, 3, 4, 5, 6	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index		1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
T1	s	1, 2, 3, 4, 5, 6	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4, 5, 6	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3, 4, 5, 6	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.8.2.1.1.1-3: Cell specific test parameters for NR cell 2

Parameter	Unit	Test configuration	Cell 2		
			T1	T2	T3
TDD configuration		1, 4	N/A		
		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH Reference measurement channel		1, 4	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET Reference Channel		1, 4	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
RMC CORESET Reference Channel		1, 4	CCR.1.1 FDD		
		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1		
SMTC configuration		1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration		1, 4	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.2 FR1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1		
RLM-RS		1, 2, 3, 4, 5, 6	SSB		
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140		
		3, 6	-137		
Pcompensation	dB	1, 2, 3, 4, 5, 6	0		
Qhyst _s	dB	1, 2, 3, 4, 5, 6	0		
Qoffset _{s, n}	dB	1, 2, 3, 4, 5, 6	0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4, 5, 6	SS-RSRP		
$\hat{E}_s/I_{ot}$	dB	1, 4	-4	-infinity	12
		2, 5			
		3, 6			

N_{oc} ^{Note2}	dBm/SCS	1, 4	-98		
		2, 5	-98		
		3, 6	-95		
N_{oc} ^{Note2}	dBm/15 kHz	1, 4	-98		
		2, 5			
		3, 6			
$\hat{E}_s / N_{oc}$	dB	1, 4	-4	-infinity	12
		2, 5			
		3, 6			
SS-RSRP ^{Note3}	dBm/SCS	1, 4	-102	-infinity	-86
		2, 5	-102	-infinity	-86
		3, 6	-99	-infinity	-83
Io	dBm/9.36 MHz	1, 4	-68.60	-70.05	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-70.05	-57.78
	dBm/38.16 MHz	3, 6	-62.50	-63.95	-51.69
Treselection	s	1, 2, 3, 4, 5, 6	0	0	0
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6	50		
Thresh _{x, highP}	dB	1, 2, 3, 4, 5, 6	48		
Thresh _{serving, lowP}	dB	1, 2, 3, 4, 5, 6	44		
Thresh _{x, lowP}	dB	1, 2, 3, 4, 5, 6	50		
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Table A.8.2.1.1.1-4: Cell specific test parameters for E-UTRA cell 1

Parameter	Unit	Cell 1		
		T1	T2	T3
E-UTRA RF Channel number		1		
BW _{channel}	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
OCNG_RB ^{Note 1}	dB			
Qrxlevmin	dBm	-140		
N _{oc} ^{Note 2}	dBm/15 kHz	-98		
RSRP ^{Note 3}	dBm/15 KHz	-84	-84	-84
$\hat{E}_s/I_{ot}$	dB	14	14	14
$\hat{E}_s/N_{oc}$	dB	14	14	14
Treselection _{EUTRAN}	S	0		
SnonintrasearchP	dB	50		
Thresh _{x, highP}	dB	48		
Thresh _{serving, lowP}	dB	44		
Thresh _{x, lowP}	dB	50		
Propagation Condition		AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 3: RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.8.2.1.1.2 Test Requirements

The cell reselection delay to a higher priority NR cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{evaluate, NR}} + T_{\text{SI-NR}}$, and to a lower priority cell can be expressed as: $T_{\text{evaluate, EUTRAN}} + T_{\text{SI-EUTRA}}$,

Where:

$T_{\text{higher_priority_search}}$	See clause 4.2.2 in TS 36.133 [15]
$T_{\text{evaluate, NR}}$	See Table 4.2.2.5.6-1 in clause 4.2.2.5.6 in TS 36.133 [15]
$T_{\text{SI-NR}}$	Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.
$T_{\text{evaluate, EUTRAN}}$	See Table 4.2.2.5-1 in clause 4.2.2.5
$T_{\text{SI-EUTRA}}$	Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority NR cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

A.8.2.1.2 E-UTRA Cell reselection to lower priority NR target Cell in FR1 for UE configured with highSpeedInterRAT-NR-r16

A.8.2.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the E-UTRAN to NR inter-RAT cell reselection requirements specified in clause 4.2.2.5.6 in 36.133 [15].

The test scenario comprises of 1 E-UTRA cell and 1 NR cell as given in tables A.8.2.1.2.1-1, A.8.2.1.2.1-2, A.8.2.1.2.1-3 and A.8.2.1.2.1-4. In SIB of the E-UTRA cell, highSpeedInterRAT-NR-r16 is configured and the carrier of NR cell is configured with highSpeedCarrierNR-r16. The test consists of two time periods, with time duration of T1 and T2 respectively. Both E-UTRA cell 1 and NR cell 2 are already identified by the UE prior to the start of the test. NR cell 2 is of lower priority than E-UTRA cell 1.

Table A.8.2.1.2.1-1: Supported test configurations for UE configured with highSpeedInterRAT-NR-r16

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.2.1.2.1-2: General test parameters in E-UTRA cell re-selection FR1 NR cell test case for UE configured with highSpeedInterRAT-NR-r16

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE camps on cell 1 in the initial phase
T1 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell2	The UE shall perform reselection to cell 2 during T1
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cells		1, 2, 3, 4, 5, 6	Cell2	
RF Channel Number			1, 2, 3, 4, 5, 6	1, 2	E-UTRAN radio channel (1) and NR radio channel (2) are used for this test
Time offset between cells			1, 4	3 ms	Asynchronous cells

		2, 5	3 μ s	Synchronous cells
		3, 6	3 μ s	Synchronous cells
Access Barring Information	-	1, 2, 3, 4, 5, 6	Not Sent	No additional delays in random access procedure.
DRX cycle length	s	1, 2, 3, 4, 5, 6	0.32	The value shall be used for all cells in the test.
NR PRACH configuration index		1, 2, 3, 4, 5, 6	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
T1	s	1, 2, 3, 4, 5, 6	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4, 5, 6	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.8.2.1.2.1-3: Cell specific test parameters for NR cell 2 in E-UTRA cell re-selection FR1 NR cell test case for UE configured with highSpeedInterRAT-NR-r16

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
TDD configuration		1, 4	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH Reference measurement channel		1, 4	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET Reference Channel		1, 4	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
RMC CORESET Reference Channel		1, 4	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration		1, 2, 3, 4, 5, 6	SMTC.1	
SSB configuration		1, 4	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
Pcompensation	dB	1, 2, 3, 4, 5, 6	0	
Qhysts	dB	1, 2, 3, 4, 5, 6	0	
Qoffsets _{s, n}	dB	1, 2, 3, 4, 5, 6	0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4, 5, 6	SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1, 4	14	14

		2, 5		
		3, 6		
N_{oc} ^{Note2}	dBm/SCS	1, 4	-98	
		2, 5	-98	
		3, 6	-95	
N_{oc} ^{Note2}	dBm/15 kHz	1, 4	-98	
		2, 5		
		3, 6		
$\hat{E}_s / N_{oc}$	dB	1, 4	14	14
		2, 5		
		3, 6		
SS-RSRP ^{Note3}	dBm/SCS	1, 4	-84	-84
		2, 5	-84	-84
		3, 6	-81	-81
Io	dBm/9.36 MHz	1, 4	-55.88	-55.88
	dBm/9.36 MHz	2, 5	-55.88	-55.88
	dBm/38.16 MHz	3, 6	-47.79	-47.79
Treselection	s	1, 2, 3, 4, 5, 6	0	
Snonintrasearch	dB	1, 2, 3, 4, 5, 6	Not sent	
Thresh _{x, high}	dB	1, 2, 3, 4, 5, 6	48	
Thresh _{serving, low}	dB	1, 2, 3, 4, 5, 6	44	
Thresh _{x, low}	dB	1, 2, 3, 4, 5, 6	50	
Propagation Condition		1, 2, 4, 5	AWGN 1944Hz ^{Note 4}	
		3,6	AWGN 3334Hz ^{Note 5}	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: The AWGN 1944 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 1944 Hz.				
Note 5: The AWGN 3334 Hz condition is a non fading propagation channel with one tap. Doppler shift is a constant 3334 Hz.				

Table A.8.2.1.2.1-4: Cell specific test parameters for E-UTRA cell 1 in E-UTRA cell re-selection FR1 NR cell test case for UE configured with highSpeedInterRAT-NR-r16

Parameter	Unit	Cell 1	
		T1	T2
E-UTRA RF Channel number		1	
BW _{channel}	MHz	10	
OCNG Patterns defined in TS 36.133 clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		

PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note 1}	dB		
OCNG_RB ^{Note 1}	dB		
Qrxlevmin	dBm	-140	
N_{oc} ^{Note 2}	dBm/15 kHz	-98	
RSRP ^{Note 3}	dBm/15 KHz	-102	-86
$\hat{E}_s / I_{ot}$	dB	-4	12
$\hat{E}_s / N_{oc}$	dB	-4	12
Treselection _{EUTRAN}	S	0	
Snonintrasearch	dB	50	
Thresh _{x, high}	dB	48	
Thresh _{serving, low}	dB	44	
Thresh _{x, low}	dB	50	
Propagation Condition		AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3:	RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4:	Void.		

A.8.2.1.2.2 Test Requirements

The cell reselection delay to a lower priority NR cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 3 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{\text{evaluate, NR_HST}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{evaluate, NR_HST}}$ See Table 4.2.2.5.6-2 in clause 4.2.2.5.6 in [15]

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 2.24 s, allow 3 s for the cell re-selection delay to a lower priority NR cell.

A.8.2.2 E-UTRA – NR Inter-RAT Early Measurement Reporting

A.8.2.2.1 E-UTRA – NR Early Measurement Reporting for NR in FR1

A.8.2.2.1.1 Test Purpose and Environment

This test is to verify the requirement for the E-UTRAN to NR inter-RAT Idle mode DC measurement requirements specified in clause 4.9.2.4 in TS 36.133 [15]. This test is also to verify the accuracy requirement for the E-UTRAN to NR inter-RAT Idle mode DC measurement requirements specified in clause 9.11.1A and 9.11.2A in TS 36.133 [15]. Supported test configurations are shown in Table A.8.2.2.1.1-1.

Table A.8.2.2.1.1-1: Supported test configurations

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

The test scenario comprises of 1 E-UTRA cell (Cell 1) and 1 NR cell (Cell 2). The test parameters and applicability for the E-UTRAN cell are defined in Table A.8.2.2.1.1-4. The general test parameters and the cell specific test parameters for the NR cell are specified in Table A.8.2.2.1.1-2 and Table A.8.2.2.1.1-3, respectively.

The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Prior to the start of the time duration T1, the UE shall be connected to Cell 1. During T1, Cell 2 shall be powered off. At the end of T1, the RRC connection to Cell 1 is released and UE is configured Idle mode DC measurement on the carrier frequency of Cell 2. Time duration T2 starts when the RRC connection is released, and during the T2 UE is in Idle mode. Cell 2 shall be powered on from the beginning of T2. At beginning of T3 the UE is paged for connection setup and requested by the network to send idle mode measurements.

Table A.8.2.2.1.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4, 5, 6	E-UTRAN Cell 1	
Neighbour cell		1, 2, 3, 4, 5, 6	NR Cell 2	Cell 2 is of higher priority.
RF Channel Number		1, 2, 3, 4, 5, 6	1: Cell 1 2: Cell 2	
DRX cycle length	s	1, 2, 3, 4, 5, 6	1.28	
Time offset between Cell 1 and Cell 2		1, 2, 3, 4, 5, 6	3 µs	
T1	s	1, 2, 3, 4, 5, 6	0.5	
T2	s	1, 2, 3, 4, 5, 6	71	
T3	s	1, 2, 3, 4, 5, 6	2	
T331	s	1, 2, 3, 4, 5, 6	300	

Table A.8.2.2.1.1-3: Cell specific test parameters for NR cell 2

Parameter	Unit	Test configuration	Cell 2		
			T1	T2	T3
TDD configuration		1, 4	N/A		

		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH Reference measurement channel		1, 4	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET Reference Channel		1, 4	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
RMC CORESET Reference Channel		1, 4	CCR.1.1 FDD		
		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
OCNG Patterns		1, 2, 3, 4, 5, 6	OP.1		
SMTc configuration		1, 2, 3, 4, 5, 6	SMTc.1		
SSB configuration		1, 4	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.2 FR1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6	ULBWP.0.1		
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140		
		3, 6	-137		
Pcompensation	dB	1, 2, 3, 4, 5, 6	0		
Qhysts	dB	1, 2, 3, 4, 5, 6	0		
Qoffsets, n	dB	1, 2, 3, 4, 5, 6	0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4, 5, 6	SS-RSRP		
N_{oc} ^{Note2}	dBm/SCS	1, 4	-98		
		2, 5	-98		
		3, 6	-95		
N_{oc} ^{Note2}	dBm/15 kHz	1, 4	-98		
		2, 5			
		3, 6			
$\hat{E}_s / N_{oc}$	dB	1, 2, 3, 4, 5, 6	-infinity	-4	-4
$\hat{E}_s / I_{ot}$	dB	1, 2, 3, 4, 5, 6	-infinity	-4	-4
SS-RSRP ^{Note3}	dBm/SCS	1, 4	-infinity	-102	-102
		2, 5	-infinity	-102	-102
		3, 6	-infinity	-99	-99
SS-RSRQ ^{Note3}	dB	1, 4	-infinity	-16.25	-16.25
		2, 5	-infinity	-16.25	-16.25
		3, 6	-infinity	-16.25	-16.25
Io	dBm/9.36 MHz	1, 4	-70.05	-68.60	-68.60
	dBm/9.36 MHz	2, 5	-70.05	-68.60	-68.60
	dBm/38.16 MHz	3, 6	-63.96	-62.50	-62.50
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		

- Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.8.2.1.1-4: Cell specific test parameters for E-UTRA cell 1

Parameter	Unit	Cell 1		
		T1	T2	T3
E-UTRA RF Channel number		1		
BW _{channel}	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
OCNG_RB ^{Note 1}	dB			
Qrxlevmin	dBm	-140		
N_{oc} ^{Note 2}	dBm/15 kHz	-98		
RSRP ^{Note 3}	dBm/15 KHz	-84	-84	-84
RSRQ ^{Note 3}	dB	-10.96	-10.96	-10.96
$\hat{E}_s/I_{ot}$	dB	14	14	14
$\hat{E}_s/N_{oc}$	dB	14	14	14
Treselection _{EUTRAN}	S	0		
SnonintrasearchP	dB	50		
Thresh _{x, highP}	dB	48		
Thresh _{serving, lowP}	dB	44		
Thresh _{x, lowP}	dB	50		
beamMeasConfigIdLe		True		
Propagation Condition		AWGN		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.8.2.2.1.2 Test Requirements

At the beginning of the time-period T2 the connection is released, and UE enters idle mode. During the time period T2 the UE is in Idle mode and Cell 2 is active. The UE shall not perform reselection. The UE shall perform Idle Mode DC measurement according to clause 4.9.2.4 in TS 36.133 [15]. UE shall be able to detect, acquire the SSB index and measure the SS-RSRP and SS-RSRQ from Cell 2 for Idle mode DC measurement during T2.

NOTE: The Idle mode DC measurement period for the test setup can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{SSB_index,NR}} + T_{\text{evaluate, NR}}$.

Where:

$T_{\text{higher_priority_search}}$ See clause 4.2.2 in TS 36.133 [15]

$T_{\text{SSB_index,NR}}$ See Table 4.9.2.4-1 in clause 4.9.2.4 in TS 36.133 [15]

$T_{\text{evaluate, NR}}$ See Table 4.2.2.5.6-1 in clause 4.2.2.5.6 in TS 36.133 [15]

This gives a total of 70.24 s, allow 71 s for the T2.

At the start of T3 the UE is paged for connection setup. During the connection setup the UE is requested to transmit early measurement report. The UE shall send early measurement report to the PCell.

After receiving the requested early measurement report, the test equipment verifies the accuracy of measurement reported for serving Cell 1 and Cell 2 meets the requirements in Section 9.1.2B in TS 36.133 [15] and Section 9.1.3B, respectively and test ends.

The rate of correct events observed during repeated tests shall be at least 90%.

A.8.2.2.2 E-UTRA – NR Early Measurement Reporting for NR in FR2

A.8.2.2.2.1 Test Purpose and Environment

This test is to verify the requirement for the E-UTRAN to NR inter-RAT Idle mode DC measurement requirements specified in clause 4.9.2.4 in TS 36.133 [15]. This test is also to verify the accuracy requirement for the E-UTRAN to NR inter-RAT Idle mode DC measurement requirements specified in clause 9.11.1A and 9.11.2A in TS 36.133 [15]. Supported test configurations are shown in Table A.8.2.2.2.1-1.

Table A.8.2.2.2.1-1: Supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

The test scenario comprises of 1 E-UTRA cell (Cell 1) and 1 NR cell (Cell 2). The test parameters and applicability for the E-UTRAN cell are defined in Table A.8.2.2.2.1-4. The general test parameters and the cell specific test parameters for the NR cell are specified in Table A.8.2.2.2.1-2 and Table A.8.2.2.2.1-3, respectively.

The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Prior to the start of the time duration T1, the UE shall be connected to Cell 1. During T1, Cell 2 shall be powered off. At the end of T1, the RRC connection to Cell 1 is released and UE is configured Idle mode DC measurement on the carrier frequency of Cell 2. Time duration T2 starts when the RRC connection is released, and during the T2 UE is in Idle mode. Cell 2 shall be powered on from the beginning of T2. At beginning of T3 the UE is paged for connection setup and requested by the network to send idle mode measurements.

Table A.8.2.2.1-2: General test parameters

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	E-UTRAN Cell 1	E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2	NR Cell 2	Cell 2 is of higher priority.
E-UTRA RF Channel Number		1, 2	1	One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1	One FR2 NR carrier frequency is used.
DRX cycle length	s	1, 2	1.28	
Time offset between Cell 1 and Cell 2		1, 2	3 μ s	
T1	s	1, 2	0.5	
T2	s	1, 2	128	
T3	s	1, 2	2	
T331	s	1, 2	300	

Table A.8.2.2.1-3: Cell specific test parameters for NR cell 2

Parameter	Unit	Test configuration	Cell 2		
			T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1		
PDSCH Reference measurement channel		1, 2	SR.3.1 TDD		
RMSI CORESET Reference Channel		1, 2	CR.3.1 TDD		
RMC CORESET Reference Channel		1, 2	CCR.3.1 TDD		
OCNG Patterns		1, 2	OP.1		
BW _{channel}	MHz	1, 2	100		
Data RBs allocated		1, 2	66		
SMTc configuration		1, 2	SMTc.1		
SSB configuration		1, 2	SSB.1 FR2		
Initial DL BWP configuration		1, 2	DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1		
RLM-RS			SSB		
Q _{rxlevmin}			-140		
P _{compensation}			0		
Q _{hysts}			0		
Q _{offsets, n}			0		
Cell_selection_and_reselection_quality_measurement			SS-RSRP		
AoA setup			Setup 1 defined in A.3.15.1		
Beam assumption ^{Note 4}			Rough		
$\hat{E}_s/I_{ot, BB}$ ^{Note 5}	dB	1, 2	-infinity	-4.18	-4.18
N_{oc} ^{Note 2}	dBm/SCS	1, 2	-98		
N_{oc} ^{Note 2}	dBm/15kHz	1, 2	-107		
$\hat{E}_s/N_{oc}$	dB	1, 2	-infinity	-4	-4

SS-RSRP	Note3	dBm/SCS	1, 2	-infinity	-102	-102
SS-RSRQ	Note3	dB	1, 2	-infinity	-16.25	-16.25
Io		dBm/95.04MHz	1, 2	-69.01	-67.56	-67.56
Propagation Condition			1, 2	AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 5: Calculation of Es/IotBB includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMBP from TS 38.101-2 [19] Table 6.2.1.3-4.						

Table A.8.2.2.1-4: Cell specific test parameters for E-UTRA cell 1

Parameter	Unit	Cell 1		
		T1	T2	T3
E-UTRA RF Channel number		1		
BW _{channel}	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
OCNG_RB ^{Note 1}	dB			
Qrxlevmin	dBm	-140		
N_{oc} ^{Note 2}	dBm/15 kHz	-98		
RSRP ^{Note 3}	dBm/15 KHz	-84	-84	-84
RSRQ ^{Note 3}	dB	-10.96	-10.96	-10.96
$\hat{E}_s/I_{ot}$	dB	14	14	14

$\hat{E}_s/N_{oc}$	dB	14	14	14
Treselection _{EUTRAN}	S	0		
SnonintrasearchP	dB	N/A		
Thresh _{x, highP}	dB	48		
Thresh _{serving, lowP}	dB	44		
Thresh _{x, lowP}	dB	50		
beamMeasConfigIdle		False		
Propagation Condition		AWGN		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.8.2.2.2 Test Requirements

At the beginning of the time-period T2 the connection is released, and UE enters idle mode. During the time period T2 the UE is in Idle mode and Cell 2 is active. The UE shall not perform reselection. The UE shall perform Idle Mode DC measurement according to clause 4.9.2.4 in TS 36.133 [15]. UE shall be able to detect, acquire the SSB index and measure the SS-RSRP and SS-RSRQ from Cell 2 for Idle mode DC measurement during T2.

NOTE: The Idle mode DC measurement period for the test setup can be expressed as: $T_{\text{detect, NR}}$.

Where:

$T_{\text{detect, NR}}$ See Table 4.2.2.5.6-1 in clause 4.2.2.5.6 in TS 36.133 [15]

This gives a total of 128 s, allow 128 s for the T2.

At the start of T3 the UE is paged for connection setup. During the connection setup the UE is requested to transmit early measurement report. The UE shall send early measurement report to the PCell.

After receiving the requested early measurement report, the test equipment verifies the accuracy of measurement reported for serving Cell 1 and Cell 2 meets the requirements in Section 9.1.2B in TS 36.133 [15] and Section 9.1.3B, respectively and test ends.

The rate of correct events observed during repeated tests shall be at least 90%.

A.8.3 RRC_CONNECTED state mobility

A.8.3.1 Handover

A.8.3.1.1 E-UTRAN - NR handover in FR1

A.8.3.1.1.1 Test Purpose and Environment

This test shall verify the E-UTRAN to NR FR1 handover requirements as specified in clause 6.1.2.1 specified in clause 5.3.4 in TS 36.133 [15].

The test comprises of one E-UTRA carrier and one NR carrier. There are two cells and one cell on each carrier. Cell 1 is the E-UTRAN and Cell 2 is an inter-RAT NR neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing

information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 8.1.2.1-1 of TS 36.133 [15] is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.8.3.1.1-1. General test parameters are provided in Table A.8.3.1.1-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.8.3.1.1-3 and A.8.3.1.1-4 respectively.

Table A.8.3.1.1-1: Supported test configurations for E-UTRAN inter-RAT NR handover

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.3.1.1-2: General test parameters for E-UTRAN inter-RAT NR handover

Parameter		Unit	Value	Comment
NR RF Channel Number			1	1 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	E-UTRAN cell
	Neighbouring cell		Cell 2	NR cell
Final condition	Active cell		Cell 2	
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
b2-Threshold1		dBm	-83	Absolute E-UTRAN RSRP threshold for event B2
b2-Threshold2NR		dBm	As specified in Table A.8.3.1.1-4	Absolute NR SS-RSRP threshold for event B2
Hysteresis		dB	0	
TimeToTrigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cells			3 ms	Asynchronous cells
Gap pattern configuration Id			0	As specified in Table 8.1.2.1-1 started before T2 starts [15]
T1		s	5	
T2		s	≤5	
T3		s	1	

Table A.8.3.1.1-3: Cell specific test parameters for E-UTRAN inter-RAT NR handover (Cell 1)

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	2		
Duplex mode		1, 2, 3	FDD		

		4, 5, 6	TDD		
TDD special subframe configuration ^{Note1}		4, 5, 6	6		
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1		
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100		
PRACH Configuration ^{Note2}		1, 2, 3	4		
		4, 5, 6	53		
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns ^{Note3}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note4}					
OCNG_RB ^{Note4}					
N _{oc} ^{Note5}					
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	7	7	7
$\hat{E}_s/I_{ot}$ ^{Note6}	dB	1, 2, 3, 4, 5, 6	7	7	7
RSRP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6	-91	-91	-91
SCH_RP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6	-91	-91	-91
I _o ^{Note6}	dBm/9MHz	1, 2, 3, 4, 5, 6	-62.43	-62.43	-62.43
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix ^{Note7}		1, 2, 3, 4, 5, 6	1x2 Low		
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].					
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].					
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.					
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.					
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.8.3.1.1-4: Cell specific test parameters E-UTRAN inter-RAT NR handover (Cell 2)

Parameter		Unit	Configuration	Cell 2		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6	1		
Duplex mode			1, 4	FDD		
			2, 3, 5, 6	TDD		
TDD Configuration			2, 5	TDDConf.1.1		
			3, 6	TDDConf.2.1		
BW _{channel}		MHz	1, 4	10: N _{RB,c} = 52 (FDD)		
			2, 5	10: N _{RB,c} = 52 (TDD)		
			3, 6	40: N _{RB,c} = 106 (TDD)		
PDSCH reference measurement channel			1, 4	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
PRACH configuration				FR1 PRACH configuration 1		
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6	OP.1		
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration			1, 2, 4, 5	SSB.1 FR1		
			3, 6	SSB.2 FR1		
b2-Threshold2NR		dBm	1, 2, 4, 5	-106		
			3, 6	-103		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N _{oc} ^{Note2}						
N _{oc} ^{Note2}		dBm/SCS	1, 2, 4, 5	-98		
			3, 6	-95		
Ê _s /N _{oc}		dB	1, 2, 3, 4, 5, 6	-infinity	0	0
Ê _s /I _{ot} ^{Note3}		dB	1, 2, 3, 4, 5, 6	-infinity	0	0
SS-RSRP ^{Note3}		dBm/SCS	1, 2, 4, 5	-infinity	-98	-98
			3, 6	-infinity	-95	-95
I ₀ ^{Note3}		dBm/9.36 MHz	1, 2, 4, 5	-70.05	-67.04	-67.04

	dBm/38.16 MHz	3, 6	-63.96	-60.94	-60.94
Propagation condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3:	$\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.8.3.1.1.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 112 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{\text{interrupt}}$, where:

RRC procedure delay = 50 ms and is specified in TS36.133.

$T_{\text{interrupt}}$ = 62 ms in the test; $T_{\text{interrupt}}$ is defined in TS36.133 clause 5.3.4.3.

This gives a total of 112 ms.

A.8.4 Measurement procedure

A.8.4.1 E-UTRA – NR Inter-RAT SFTD Measurement Delay

A.8.4.1.1 E-UTRA – NR Inter-RAT SFTD Measurement Delay in non-DRX

A.8.4.1.1.1 Test Purpose and Environment

The purpose of this test is to partly verify that measurement reporting delay for SFTD between E-UTRA PCell and inter-RAT NR neighbour cell in FR1 is within the requirements stated in clauses 8.1.2.4.25 and 8.1.2.4.26 of TS 36.133 [15] for E-UTRA FDD and TDD, respectively, when no measurement gaps are provided and no DRX is configured.

The tests consist of a single time period of duration T1. Two carriers are used in the tests: one E-UTRA carrier with the PCell (Cell 1), and one NR carrier with the NR neighbour cell (Cell 2).

Prior to the start of time duration T1, the UE is connected to Cell 1 and configured to carry out intra-frequency measurements only. The point in time at which the UE receives, at the UE antenna connector(s), a RRC message containing a measurement configuration for SFTD measurements on RF channel 1 defines the start of time duration T1. Following the start of T1 the UE shall detect Cell 2, determine the SFN and frame time difference of Cell 2 relative to Cell 1, and send a measurement report.

The supported test configurations are listed in Table A.8.4.1.1.1-1 below. Test parameters and cell-specific parameters for the NR cell are provided in Tables A.8.4.1.1.1-2 and A.8.4.1.1.1-3 below, respectively. Cell-specific parameters for the E-UTRA cell are provided in Table A.3.7.2.1-1 in clause A.3.7.2.1.

Table A.8.4.1.1.1-1: Applicable E-UTRA and NR configurations for inter-RAT SFTD measurement delay test

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.4.1.1.1-2: Applicable E-UTRA and NR configurations for inter-RAT SFTD measurement delay test

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1		One NR FR1 carrier frequencies is used.
Active cell		Config 1,2,3,4,5,6	Cell 1		Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	Cell 2		Cell 2 is on NR RF channel number 1.
SSB configuration		Config 1,4	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2,5	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3,6	SSB.2 FR1		As specified in clause A.3.10.1
CP length		Config 1,2,3,4,5,6	Normal		Applicable to both cells.
DRX		Config 1,2,3,4,5,6	OFF		DRX is not used
Frame time offset between serving and neighbour cells	ms	Config 1,2,4,5	3	7	Asynchronous cells. The timing of Cell 2 relative to the timing of Cell 1.
	μs	Config 3,6	3		Synchronous cells.
SFN offset between serving and neighbour cells		Config 1,2,3,4,5,6	0	1	SFN of Cell 2 relative to SFN of Cell 1.
T1	s	Config 1,2,3,4,5,6	1		

Table A.8.4.1.1.1-3: Cell specific test parameters for Cell 2 in inter-RAT SFTD measurement delay test

Parameter	Unit	Test configuration	Cell 2
NR RF Channel Number		Config 1,2,3,4,5,6	1
Duplex mode		Config 1,4	FDD
		Config 2,3,5,6	TDD
BW _{channel}	MHz	Config 1,4	10: N _{RB,c} = 52
		Config 2,5	10: N _{RB,c} = 52
		Config 3,6	40: N _{RB,c} = 106
TDD configuration		Config 2,5	TDDConf.1.1
		Config 3,6	TDDConf.2.1
OCNG Pattern defined in A.3.2.1.1		Config 1,2,3,4,5,6	OP.1
SMTC configuration		Config 1,2,3,4,5,6	SMTC.1

PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	15
		Config 3,6	30
EPRE ratio of PSS to SSS	dB	Config 1,2,3,4,5,6	0
EPRE ratio of PBCH DMRS to SSS	dB		
EPRE ratio of PBCH to PBCH DMRS	dB		
EPRE ratio of OCNG DMRS to SSS ^{Note 1}	dB		
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}	dB		
N_{oc} ^{Note 2}	dBm/15kHz		-98
N_{oc} ^{Note 2}	dBm/SCS	Config 1,2,4,5	-98
		Config 3,6	-95
SS-RSRP ^{Note 3, 4}	dBm/SCS	Config 1,2,4,5	-94
		Config 3,6	-91
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4,5,6	4
I_o ^{Note 3}	dBm/9.36MHz	Config 1,2,4,5	-64.59
	dBm/38.16MHz	Config 3,6	-58.50
Propagation Condition		Config 1,2,3,4,5,6	AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			

A.8.4.1.1.2 Test Requirements

Following the start of T1, the UE shall detect Cell 2 and determine the relative time difference between Cell 1 and Cell 2. At latest at $T_{RRC_procedure_delay} + T_{measure_SFTD1}$ after the beginning of time duration T1, the UE shall send a measurement report on SFTD between Cell 1 and Cell 2.

The observed rate of successful SFTD reports in repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ longer than the measurement reporting delays above due to TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.1.2 E-UTRA – NR Inter-RAT SFTD Measurement Delay in DRX

A.8.4.1.2.1 Test Purpose and Environment

The purpose of this test is to partly verify that measurement reporting delay for SFTD between E-UTRA PCell and inter-RAT NR neighbour cell in FR1 is within the requirements stated in clauses 8.1.2.4.25 and 8.1.2.4.26 of TS 36.133 [15] for E-UTRA FDD and TDD, respectively, when no measurement gaps are provided and DRX is configured.

The tests consist of a single time period of duration T1. Two carriers are used in the tests: one E-UTRA carrier with the PCell (Cell 1), and one NR carrier with the NR neighbour cell (Cell 2).

Prior to the start of time duration T1, the UE is connected to Cell 1 and configured to carry out intra-frequency measurements only. The point in time at which the UE receives, at the UE antenna connector(s), a RRC message containing a measurement configuration for SFTD measurements on RF channel 1 defines the start of time duration

T1. Following the start of T1 the UE shall detect Cell 2, determine the SFN and frame time difference of Cell 2 relative to Cell 1, and send a measurement report.

The supported test configurations are listed in Table A.8.4.1.2.1-1 below. Test parameters are provided in Tables A.8.4.1.2.1-2 below. Cell-specific parameters for the E-UTRA and NR cells are provided in Table A.3.7.2.1-1 in clause A.3.7.2.1, and Table A.8.4.1.1.1-3 in clause A.8.4.1.1.1, respectively.

Table A.8.4.1.2.1-1: Applicable E-UTRA and NR configurations for inter-RAT SFTD measurement delay test in DRX

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.4.1.2.1-2: Applicable E-UTRA and NR configurations for inter-RAT SFTD measurement delay test in DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1		One NR FR1 carrier frequencies is used.
Active cell		Config 1,2,3,4,5,6	Cell 1		Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Config 1,2,3,4,5,6	Cell 2		Cell 2 is on NR RF channel number 1.
SSB configuration		Config 1,4	SSB.1 FR1		As specified in clause A.3.10.1
		Config 2,5	SSB.1 FR1		As specified in clause A.3.10.1
		Config 3,6	SSB.2 FR1		As specified in clause A.3.10.1
CP length		Config 1,2,3,4,5,6	Normal		Applicable to both cells.
DRX		Config 1,2,3,4,5,6	DRX.4		DRX configuration as specified in clause A.3.3.4
Frame time offset between serving and neighbour cells	ms	Config 1,2,4,5	3	7	Asynchronous cells. The timing of Cell 2 relative to the timing of Cell 1.
	µs	Config 3,6	3		Synchronous cells.
SFN offset between serving and neighbour cells		Config 1,2,3,4,5,6	0	1	SFN of Cell 2 relative to SFN of Cell 1.
T1	s	Config 1,2,3,4,5,6	1		

A.8.4.1.2.2 Test Requirements

Following the start of T1, the UE shall detect Cell 2 and determine the relative time difference between Cell 1 and Cell 2. At latest at the earliest DRX activity time following upon $T_{\text{RRC_procedure_delay}} + T_{\text{measure_SFTD1}}$ from the beginning of time duration T1, the UE shall send a measurement report on SFTD between Cell 1 and Cell 2.

The observed rate of successful SFTD reports in repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ longer than the measurement reporting delays above due to TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2 E-UTRA – NR Inter-RAT Measurements

A.8.4.2.1 NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

A.8.4.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.1.1-1, A.8.4.2.1.1-2, A.8.4.2.1.1-3 and A.8.4.2.1.1-4.

Measurement gap pattern configuration is defined in Table A.8.4.2.1.1-2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.1.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.8.4.2.1.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6	1	One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6	39	As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	Note 1	E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]

b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6	Note 2	SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0	
CP length		1, 2, 3, 4, 5, 6	Normal	
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0	
Filter coefficient		1, 2, 3, 4, 5, 6	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	OFF	DRX is not used
Time offset between serving and neighbour cells		1, 4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs	Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5	
T2	s	1, 2, 3, 4, 5, 6	1	
Note 1: The value of b2-Threshold1 is defined in Table A.8.4.2.1.1-3				
Note 2: The value of b2-Threshold2NR is defined in Table A.8.4.2.1.1-4				

Table A.8.4.2.1.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				

PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	17	17
$\hat{E}_s/I_{ot}$ ^{Note5}	dB	1, 2, 3, 4, 5, 6	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
I _o ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6	-59.13+10log (N _{RB,C} /50)	-59.13+10log (N _{RB,C} /50)
Propagation Condition ^{Note6}		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2, 3, 4, 5, 6	1x2	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

Table A.8.4.2.1.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
BW _{channel}	MHz	1, 2, 4, 5	10: N _{RB,c} = 52	
		3, 6	40: N _{RB,c} = 106	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				

EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Note2	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
Note2	dBm/SCS	1, 2, 4, 5	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
I_o Note3	dBm/9.36MHz	1, 2, 4, 5	-70.05	-62.26
	dBm/38.16MHz	3, 6	-63.95	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

A.8.4.2.1.2 Test Requirements

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.2 NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used

A.8.4.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.2.1-1, A.8.4.2.2.1-2, A.8.4.2.2.1-3 and A.8.4.2.2.1-4.

In tests 1 and 2, measurement gap pattern configuration is defined in Table A.8.4.2.2.1-2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.2.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.8.4.2.2.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6	1		One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6	1		One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6	39		As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	Note 1		E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6	Note 2		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0		
CP length		1, 2, 3, 4, 5, 6	Normal		
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0		
Filter coefficient		1, 2, 3, 4, 5, 6	0		L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1, 4	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs		Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5		
T2	s	1, 2, 3, 4, 5, 6	2	11	
Note 1: The value of b2-Threshold1 is defined in Table A.8.4.2.2.1-3					
Note 2: The value of b2-Threshold2NR is defined in Table A.8.4.2.2.1-4					

Table A.8.4.2.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\bar{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	17	17
$\bar{E}_s/I_{ot}$ ^{Note5}	dB	1, 2, 3, 4, 5, 6	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
I ₀ ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6	-59.13+10log (N _{RB,c} /50)	-59.13+10log (N _{RB,c} /50)
Propagation Condition ^{Note6}		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2, 3, 4, 5, 6	1x2	

Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].

Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.

- Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
- Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.8.4.2.2.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
BW _{channel}	MHz	1, 2, 4, 5	10: $N_{RB,C} = 52$	
		3, 6	40: $N_{RB,C} = 106$	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Note2 N_{oc}	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
Note2 N_{oc}	dBm/SCS	1, 2, 4, 5	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
I_o Note3	dBm/9.36MHz	1, 2, 4, 5	-70.05	-62.26
	dBm/38.16MHz	3, 6	-63.95	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2	

Note 1:	OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for $\bar{N}$ to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.8.4.2.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1 and 2, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.3 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

A.8.4.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.3.1-1, A.8.4.2.3.1-2, A.8.4.2.3.1-3 and A.8.4.2.3.1-4.

Measurement gap pattern configuration is defined in Table A.8.4.2.3.1-2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.3.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Note 1: The UE is only required to be tested in one of the supported test configurations.

Table A.8.4.2.3.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6	1	One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6	39	As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	Note 1	E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6	Note 2	SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0	
CP length		1, 2, 3, 4, 5, 6	Normal	
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0	
Filter coefficient		1, 2, 3, 4, 5, 6	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	OFF	DRX is not used
Time offset between serving and neighbour cells		1, 4	3ms	Asynchronous cells. The timing of Cell 2 is 3 ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs	Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5	
T2	s	1, 2, 3, 4, 5, 6	2	
Note 1: The value of b2-Threshold1 is defined in Table A.8.4.2.3.1-3				
Note 2: The value of b2-Threshold2NR is defined in Table A.8.4.2.3.1-4				

Table A.8.4.2.3.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1	

BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	17	17
$\hat{E}_s/I_{ot}$ ^{Note5}	dB	1, 2, 3, 4, 5, 6	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
I _o ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6	-59.13+10log (N _{RB,c} /50)	-59.13+10log (N _{RB,c} /50)
Propagation Condition ^{Note6}		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2, 3, 4, 5, 6	1x2	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

Table A.8.4.2.3.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
BW _{channel}	MHz	1, 2, 4, 5	10: N _{RB,c} = 52	
		3, 6	40: N _{RB,c} = 106	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Note2 N_{sc}	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
Note2 N_{sc}	dBm/SCS	1, 2, 4, 5	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
I _o Note3	dBm/9.36MHz	1, 2, 4, 5	-70.05	-62.26
	dBm/38.16MHz	3, 6	-63.95	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{sc} to be fulfilled.				
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

A.8.4.2.3.2 Test Requirements

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.4 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used

A.8.4.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.4.1-1, A.8.4.2.4.1-2, A.8.4.2.4.1-3 and A.8.4.2.4.1-4.

In tests 1 and 2, measurement gap pattern configuration is defined in Table A.8.4.2.4.1-2.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.4.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.8.4.2.4.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6	1		One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6	1		One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.

Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6	39		As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	Note 1		E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6	Note 2		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0		
CP length		1, 2, 3, 4, 5, 6	Normal		
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0		
Filter coefficient		1, 2, 3, 4, 5, 6	0		L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1, 4	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs		Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5		
T2	s	1, 2, 3, 4, 5, 6	2	13	
Note 1: The value of b2-Threshold1 is defined in Table A.8.4.2.4.1-3					
Note 2: The value of b2-Threshold2NR is defined in Table A.8.4.2.4.1-4					

Table A.8.4.2.4.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD	

			10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	17	17
$\hat{E}_s/I_{ot}$ ^{Note5}	dB	1, 2, 3, 4, 5, 6	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
I _o ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6	-59.13+10log (N _{RB,c} /50)	-59.13+10log (N _{RB,c} /50)
Propagation Condition ^{Note6}		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2, 3, 4, 5, 6	1x2	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

Table A.8.4.2.4.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5	10: $N_{RB,c} = 52$	
		3, 6	40: $N_{RB,c} = 106$	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4	SMTC.2	
		2, 3, 5, 6	SMTC.1	

PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Note2 N_{oc}	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
Note2 N_{oc}	dBm/SCS	1, 2, 4, 5	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{of}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
Io Note3	dBm/9.36MHz	1, 2, 4, 5	-70.05	-62.26
	dBm/38.16MHz	3, 6	-63.95	-56.16
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

A.8.4.2.4.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1 and 2, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.5 NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is not used

A.8.4.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.5.1-1, A.8.4.2.5.1-2 and A.8.4.2.5.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

Measurement gap pattern configuration defined in Table A.8.4.2.5.1-2 is provided for a UE that does not support per-FR gap, and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have timing information of NR cell 2.

Table A.8.4.2.5.1-1: NR inter-RAT event triggered reporting test without SSB index reading for FR2 in non-DRX

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.8.4.2.5.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		1, 2	1	One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1	One FR2 NR carrier frequency is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39	As specified in TS 36.331 [16].
b1-ThresholdNR	dBm	1, 2	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]
Hysteresis	dB	1, 2	0	
CP length		1, 2	Normal	
TimeToTrigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	DRX is not used
Time offset between serving and neighbour cells		1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.

		2	3μs	Synchronous cells.
T1	s	1, 2	10	
T2	s	1, 2	6	
Note 1: The value of b1-ThresholdNR is defined in Table A.8.4.2.5.1-3				

Table A.8.4.2.5.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

Parameter		Unit	Test configuration	Cell 2	
				T1	T2
AoA setup defined in A.3.15.2.1			1, 2	Setup 2a	
Assumption for UE beams ^{Note 5}			1, 2	Rough	
NR RF Channel Number			1, 2	1	
Duplex mode			1, 2	TDD	
TDD configuration			1, 2	TDDConf.3.1	
BW _{channel}		MHz	1, 2	100: N _{RB,c} = 24	
OCNG patterns defined in A.3.2.1.1			1, 2	OP. 3	
SMTC configuration defined in A.3.11.1 and A.3.11.2			1	SMTC.2	
			2	SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	1, 2	120	
b1-ThresholdNR	UE power class 3	dBm/SCS	1, 2	-112	
EPRE ratio of PSS to SSS			1, 2	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
$\bar{E}_s$		dBm/SCS	1, 2	-Infinity	-80.6
SS B _{RP} ^{Note 3}		dBm/SCS	1, 2	-Infinity	-80.6
$\hat{E}_{s,i}/I_{ot_BB}$ ^{Note 6}		dB	1, 2	-Infinity	8.3
I _o ^{Note3}		dBm/95.04MHz	1, 2	-Infinity	-56.0
Propagation Condition			1, 2	AWGN	
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Void					
Note 3: SS B _{RP} and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: Void					
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					
Note 6: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.					

A.8.4.2.5.2 Test Requirements

The UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms and D2 ms from the beginning of time period T2 for a UE incapable of per-FR gap and for a UE capable of per-FR

gap, respectively. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index.

Table A.8.4.2.5.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

Test case	Measurement reporting delay (ms)	
	D1 ms	D2 ms
UE power class 3	3200	1600

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.6 NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is used

A.8.4.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.6.1-1, A.8.4.2.6.1-2 and A.8.4.2.6.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

Measurement gap pattern configuration defined in Table A.8.4.2.6.1-2 is provided for a UE that does not support per-FR gap, and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have timing information of NR cell 2.

Table A.8.4.2.6.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR2 in DRX

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.8.4.2.6.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2	1		One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1		One FR2 NR carrier frequency is used.

Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6	39		As specified in TS 36.331 [16].
b1-ThresholdNR	dBm	1, 2	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0		
CP length		1, 2, 3, 4, 5, 6	Normal		
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0		
Filter coefficient		1, 2, 3, 4, 5, 6	0		L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs		Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5		
T2	s	1, 2, 3, 4, 5, 6	6	83	
Note 1: The value of b1-ThresholdNR is defined in Table A.8.4.2. 6.1-3					

Table A.8.4.2.6.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

Parameter		Unit	Test configuration	Cell 2	
				T1	T2
AoA setup defined in A.3.15.1			1, 2	Setup 1	
Assumption for UE beams ^{Note 5}			1, 2	Rough	
NR RF Channel Number			1, 2	1	
Duplex mode			1, 2	TDD	
TDD configuration			1, 2	TDDConf.3.1	
BW _{channel}		MHz	1, 2	100: N _{RB,c} = 66	
OCNG patterns defined in A.3.2.1.1 (OP.1)			1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2			1	SMTC.2	
			2	SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	1, 2	120	
b1-ThresholdNR	UE power class 3	dBm/SCS	1, 2	-106	
EPRE ratio of PSS to SSS			1, 2	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					

EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note2}	dBm/15kHz	1, 2	-104.7	
N_{oc} ^{Note2}	dBm/SCS	1, 2	-95.7	
SS-RSRP ^{Note 3}	dBm/SCS	1, 2	-Infinity	-87.7
$\hat{E}_s/I_{ot}$	dB	1, 2	-Infinity	8
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	8
I_o ^{Note3}	dBm/95.04MH z	1, 2	-66.7	-58. 0
Propagation Condition		1, 2	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.8.4.2.6.2 Test Requirements

In test 1, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms and D3 ms from the beginning of time period T2 for a UE incapable of per-FR gap and for a UE capable of per-FR gap, respectively. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D2 ms and D4 ms from the beginning of time period T2 for a UE incapable of per-FR gap and for a UE capable of per-FR gap, respectively. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1 and 2, the UE is not required to report SSB time index.

Table A.8.4.2.6.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

Test case	Measurement reporting delay (ms)			
	D1 ms	D2 ms	D3 ms	D4 ms
UE power class 3	4800	51200	4800	51200

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.7 NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is not used

A.8.4.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.7.1-1, A.8.4.2.7.1-2 and A.8.4.2.7.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

Measurement gap pattern configuration defined in Table A.8.4.2.7.1-2 is provided for a UE that does not support per-FR gap, and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.7.1-1: NR inter-RAT event triggered reporting test with SSB index reading for FR2 in non-DRX

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.8.4.2.7.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Numbers		1, 2	1	One E-UTRA carrier frequency is used.
NR RF Channel Numbers		1, 2	1	One FR2 NR carrier frequency is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39	As specified in TS 36.331 [16].
b1-ThresholdNR	dBm	1, 2	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]
Hysteresis	dB	1, 2	0	
CP length		1, 2	Normal	
TimeToTrigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	DRX is not used

Time offset between serving and neighbour cells		1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs	Synchronous cells.
T1	s	1, 2	5	
T2	s	1, 2	5	
Note 1: The value of b1-ThresholdNR is defined in Table A.8.4.2. 7.1-3				

Table A.8.4.2.7.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

Parameter		Unit	Test configuration	Cell 2	
				T1	T2
AoA setup defined in A.3.15.1			1, 2	Setup 1	
Assumption for UE beams ^{Note 5}			1, 2	Rough	
NR RF Channel Number			1, 2	1	
Duplex mode			1, 2	TDD	
TDD configuration			1, 2	TDDConf.3.1	
BW _{channel}		MHz	1, 2	100: N _{RB,c} = 66	
OCNG patterns defined in A.3.2.1.1			1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2			1	SMTC.2	
			2	SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	1, 2	120	
b1-ThresholdNR	UE power class 3	dBm/SCS	1, 2	-106	
EPRE ratio of PSS to SSS			1, 2	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
^{Note2} N_{oc}		dBm/15kHz	1, 2	-104.7	
^{Note2} N_{oc}		dBm/SCS	1, 2	-95.7	
SS-RSRP ^{Note 3}		dBm/SCS	1, 2	-Infinity	-87.7
$\hat{E}_s/I_{ot}$		dB	1, 2	-Infinity	8
$\hat{E}_s/N_{oc}$		dB	1, 2	-Infinity	8
I _o ^{Note3}		dBm/95.04MH z	1, 2	-66.7	-58. 0
Propagation Condition			1, 2	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.8.4.2.7.2 Test Requirements

The UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms and D2 ms from the beginning of time period T2 for a UE incapable of per-FR gap and for a UE capable of per-FR gap, respectively. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

Table A.8.4.2.7.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

Test case	Measurement reporting delay (ms)	
	D1 ms	D2 ms
UE power class 3	4160	2080

A.8.4.2.8 NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is used

A.8.4.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.8.1-1, A.8.4.2.8.1-2 and A.8.4.2.8.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

Measurement gap pattern configuration defined in Table A.8.4.2.8.1-2 is provided for a UE that does not support per-FR gap, and no gap pattern (Gap Pattern Id and Measurement gap offset) is configured for a UE capable of per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.8.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR2 in DRX

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.8.4.2.8.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in DRX

Parameter	Unit	Test configuration	Value	Comment
-----------	------	--------------------	-------	---------

			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2	1		One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1		One FR2 NR carrier frequency is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39		As specified in TS 36.331 [16].
b1-ThresholdNR	dBm	1, 2	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]
Hysteresis	dB	1, 2	0		
CP length		1, 2	Normal		
TimeToTrigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX			DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs		Synchronous cells.
T1	s	1, 2	5		
T2	s	1, 2	7	70	
Note 1: The value of b1-ThresholdNR is defined in Table A.8.4.2. 8.1-3					

Table A.8.4.2.8.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection

Parameter		Unit	Test configuration	Cell 2	
				T1	T2
AoA setup defined in A.3.15.1			1, 2	Setup 1	
Assumption for UE beams ^{Note 5}			1, 2	Rough	
NR RF Channel Number			1, 2	1	
Duplex mode			1, 2	TDD	
TDD configuration			1, 2	TDDConf.3.1	
BW _{channel}		MHz	1, 2	100: N _{RB,C} = 66	
OCNG patterns defined in A.3.2.1.1			1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2			1	SMTC.2	
			2	SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	1, 2	120	
b1-ThresholdNR	UE power class 3	dBm/SCS	1, 2	-106	
EPRE ratio of PSS to SSS			1, 2	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N _{oc} ^{Note2}		dBm/15kHz	1, 2	-104.7	
N _{oc} ^{Note2}		dBm/SCS	1, 2	-95.7	
SS-RSRP ^{Note 3}		dBm/SCS	1, 2	-Infinity	-87.7
$\hat{E}_s/I_{ot}$		dB	1, 2	-Infinity	8
$\hat{E}_s/N_{oc}$		dB	1, 2	-Infinity	8
Io ^{Note3}		dBm/95.04MH z	1, 2	-66.7	-58. 0
Propagation Condition			1, 2	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.					
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.8.4.2.8.2 Test Requirements

In test 1, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms and D3 ms from the beginning of time period T2 for a UE incapable of per-FR gap and for a UE capable of per-FR gap, respectively. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2 for a UE incapable of per-FR gap and for a UE capable of per-FR gap, respectively. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1 and 2, the UE is required to report SSB time index.

Table A.8.4.2.8.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in DRX

Test case	Measurement reporting delay (ms)			
	D1 ms	D2 ms	D3 ms	D4 ms
UE power class 3	6240	66560	6240	66560

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.4.2.9 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection in DRX for UE configured with highSpeedInterRAT-NR-r16

A.8.4.2.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements when UE is configured with *highSpeedInterRAT-NR-r16*.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.8.4.2.9.1-1, A.8.4.2.9.1-2, A.8.4.2.9.1-3 and A.8.4.2.9.1-4.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.8.4.2.9.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR1 for UE configured with highSpeedInterRAT-NR-r16

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.8.4.2.9.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection for UE configured with highSpeedInterRAT-NR-r16

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6	1	One E-UTRA carrier frequency is used.

NR RF Channel Number		1, 2, 3, 4, 5, 6	1	One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6	39	As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	Note 1	E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6	Note 2	SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0	
CP length		1, 2, 3, 4, 5, 6	Normal	
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0	
Filter coefficient		1, 2, 3, 4, 5, 6	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.5	As specified in clause A.3.3
Time offset between serving and neighbour cells		1, 4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs	Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5	
T2	s	1, 2, 3, 4, 5, 6	5	
Note 1: The value of b2-Threshold1 is defined in Table A.8.4.2.9.1-3				
Note 2: The value of b2-Threshold2NR is defined in Table A.8.4.2.9.1-4				

Table A.8.4.2.9.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting with NR neighbour cell in FR1 with SSB time index detection for UE configured with highSpeedInterRAT-NR-r16

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 2, 3	FDD	
		4, 5, 6	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: N _{RB,C} = 25 10 MHz: N _{RB,C} = 50 20 MHz: N _{RB,C} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6	5 MHz: R.11 TDD	

			10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	17	17
$\hat{E}_s/I_{ot}$ ^{Note5}	dB	1, 2, 3, 4, 5, 6	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-87	-87
I _o ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6	-59.13+10log (N _{RB,c} /50)	-59.13+10log (N _{RB,c} /50)
Propagation Condition ^{Note6}		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2, 3, 4, 5, 6	1x2 Low	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

Table A.8.4.2.9.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection for UE configured with highSpeedInterRAT-NR-r16

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
BW _{channel}	MHz	1, 2, 4, 5	10: N _{RB,c} = 52	
		3, 6	40: N _{RB,c} = 106	

OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Note2	dBm/15kHz	1, 2, 3, 4, 5, 6	-98	
Note2	dBm/SCS	1, 2, 4, 5	-98	
		3, 6	-95	
SS-RSRP ^{Note 3}	dBm/SCS	1, 2, 4, 5	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	1, 2, 4, 5	-70.05	-62.26
	dBm/38.16MHz	3, 6	-63.95	-56.16
Propagation Condition		1, 2, 4, 5	AWGN1944	
		3,6	AWGN3334	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

A.8.4.2.9.2 Test Requirements

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 4.8s from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.8.5 Measurement performance

A.8.5.1 SFTD accuracy

A.8.5.1.1 SFTD accuracy

A.8.5.1.1.1 Test Purpose

The purpose of this set of tests is to verify that the SFTD measurement accuracy is within the specified limits. This test will verify the requirements as specified in clause 9.1.27 in TS 36.133 [15] for inter-RAT FR1 SFTD measurements.

A.8.5.1.1.2 Test Environment

Supported test configurations are shown in Table A.8.5.1.1.2-1. In this set of test cases there are two cells on different carriers. Cell 1 is E-UTRAN PCell and Cell 2 is inter-RAT NR FR1 target cell. The test parameters of cell 1 are given in clause A.8.5.1.1.2-2. The test parameters of cell 2 are given in Table A.8.5.1.1.2-3. The SFTD between PCell and target cell shall be set by the test equipment to one of the time differences in Table A.8.5.1.1.2-4.

Table A.8.5.1.1.2-1: Supported test configurations for SFTD accuracy

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.5.1.1.2-2: Test parameters for SFTD accuracy (Cell 1)

Parameter	Unit	Test 1
E-UTRA RF Channel Number		1
Duplex mode		FDD or TDD
TDD special subframe configuration ^{Note1}		6
TDD uplink-downlink configuration ^{Note1}		1
BW _{channel}		5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns ^{Note2}		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD

PBCH_RA	dB	0
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	
PDCCH_RA	dB	
PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA ^{Note3}	dB	
OCNG_RB ^{Note3}	dB	
N _{oc} ^{Note4}	dBm/15 kHz	-104
$\hat{E}_s/N_{oc}$	dB	-3
$\hat{E}_s/I_{ot}$	dB	-3
RSRP ^{Note5}	dBm/15 kHz	-107
SCH_RP ^{Note5}	dBm/15 kHz	-107
I _o ^{Note5}	dBm/Ch BW	-74.45 +10log (N _{RB,c} /50)
Propagation Condition		AWGN
Antenna Configuration		1x2
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23]. Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively. Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 5: Es/Iot, RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		

Table A.8.5.1.1.2-3: Test parameters for SFTD accuracy (Cell 2)

Parameter	Config	Unit	Test 1
SSB GSCN	1~6		freq1
Duplex mode	1,4		FDD
	2,5		TDD
	3,6		TDD
	3,6		TDD
TDD Configuration	1,4		N/A
	2,5		TDDConf.1.1
	3,6		TDDConf.2.1
	3,6		TDD
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2,5		10: N _{RB,c} = 52
	3,6		40: N _{RB,c} = 106
	3,6		40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2,5		SR.1.1 TDD
	3,6		SR.2.1 TDD
	3,6		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2,5		CR.1.1 TDD
	3,6		CR.1.1 TDD
	3,6		CR.2.1 TDD
RMC CORESET Reference Channel	1,4		CCR.1.1 FDD
	2,5		CCR.1.1 TDD
	3,6		CCR.1.1 TDD
	3,6		CCR.2.1 TDD
SSB configuration	1,4		SSB.1 FR1
	2,5		SSB.1 FR1

		3,6		SSB.2 FR1
SMTC configuration		1~6		SMTC.1
DL BWP configuration		1~6		DLBWP.1.1
UL BWP configuration		1~6		ULBWP.1.1
OCNG Patterns		1~6		OP.1
EPRE ratio of PSS to SSS		1~6	dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
N_{oc} ^{Note2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1~6	dBm/15kHz	-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
N_{oc} ^{Note2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1,2,4,5	dBm/SSB SCS	-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	3,6		-101
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
$\hat{E}_s / I_{ot}$		1~6	dB	-3
$\hat{E}_s / N_{oc}$		1~6	dB	-3
SS-RSRP ^{Note3}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1,2,4,5	dBm/SCS	-107
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			

	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	3,6		-104
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
I _o ^{Note3}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1,2,4,5	dBm/9.36 MHz	-74.28
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	3,6	dBm/38.16 MHz	-68.18
	NR_FDD_FR1_B			
	NR_TDD_FR1_C			
	NR_FDD_FR1_D, NR_TDD_FR1_D			
	NR_FDD_FR1_E, NR_TDD_FR1_E			
	NR_FDD_FR1_F			
	NR_FDD_FR1_G			
	NR_FDD_FR1_H			
Propagation condition		1~6		AWGN
Antenna configuration		1~6		1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification				

Table A.8.5.1.1.2-4: Timing offsets for SFTD accuracy test

Condition	SFN offset between PCell and PSCell	Frame boundary offset between PCell and PSCell (Ts)
1	100	-122000
2	300	-60540
3	500	1000

4	700	62540
5	900	124000

A.8.5.1.1.3 Test Requirements

The SFTD reported by the UE consists of 2 elements, SFN offset and frame boundary offset between PCell and inter-RAT NR target cell. The reported SFTD accuracy shall fulfil the requirement in clause 9.1.27 in TS 36.133 [15].

A.8.5.2 E-UTRA – NR Inter-RAT Measurement Performance requirements

A.8.5.2.1 SS-RSRP

A.8.5.2.1.1 E-UTRAN – NR inter-RAT measurements with FR1 target cell

A.8.5.2.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.1 in TS 36.133 [15] for inter-RAT FR1 SS-RSRP measurements.

A.8.5.2.1.1.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.1.1.2-1. In this test case there are two cells on different carriers. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1. Cell 2 is the inter-RAT NR FR1 target cell. The absolute accuracy requirements of SS-RSRP inter-RAT measurement is tested by using test parameters in Table A.8.5.2.1.1.2-2.

Table A.8.5.2.1.1.2-1: SS-RSRP Inter-RAT SS-RSRP supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.5.2.1.1.2-2: SS-RSRP inter-RAT test parameters

Parameter			Unit	Test 1 Cell 2	Test 2 Cell 2
SSB ARFCN				freq1	freq1
Duplex mode	Config 1,4			FDD	
	Config 2,3,5,6			TDD	
TDD configuration	Config 1,4			Not Applicable	
	Config 2,5			TDDConf.1.1	
	Config 3,6			TDDConf.2.1	
Downlink initial BWP configuration				DLBWP.0.1	
Uplink initial BWP configuration				ULBWP.0.1	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4			-	-
	Config 2,5				
	Config 3,6				
RMSI CORESET Reference Channel	Config 1,4			-	-
	Config 2,5				
	Config 3,6				
Dedicated CORESET Reference Channel	Config 1,4			-	-
	Config 2,5				
	Config 3,6				
OCNG Patterns				OP.1	
SS-RSSI-Measurement				Not Applicable	
SMTTC configuration				SMTTC.1	
SSB configuration	Config 1,2,4,5			SSB.1 FR1	
	Config 3,6			SSB.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5		kHz	15	
	Config 3,6			30	
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} ^{Note2}	Config 1,2,3,4,5,6	NR_FDD_FR1_A	dBm/15k Hz	-94.65	-117
		NR_TDD_FR1_A			
		NR_FDD_FR1_B			-116.5
		NR_TDD_FR1_C			-116
		NR_FDD_FR1_D			-115.5
		NR_TDD_FR1_D			
		NR_FDD_FR1_E			-115
		NR_TDD_FR1_E			
		NR_FDD_FR1_F			-114.5
		NR_FDD_FR1_G			-114
		NR_FDD_FR1_H			-113.5
N_{oc} ^{Note2}	Config 1,2,4,5		dBm/SC S	-94.65	Same as Noc for 15kHz
	Config 3,6	NR_FDD_FR1_A		-91.65	-114
		NR_TDD_FR1_A			
		NR_FDD_FR1_B			-113.5

		NR_TDD_FR1_C			-113
		NR_FDD_FR1_D			-112.5
		NR_TDD_FR1_D			
		NR_FDD_FR1_E			-112
		NR_TDD_FR1_E			
		NR_FDD_FR1_F			-111.5
		NR_FDD_FR1_G			-111
		NR_FDD_FR1_H			-110.5
$\hat{E}_s / I_{ot}$			dB	10	-4
$\hat{E}_s / N_{oc}$			dB	10	-4
SS-RSRP ^{Note3}	Config 1,2,4,5	NR_FDD_FR1_A	dBm/SCS	-84.65	-121
		NR_TDD_FR1_A NOTE 6			
		NR_FDD_FR1_B			-120.5
		NR_TDD_FR1_C			-120
		NR_FDD_FR1_D			-119.5
		NR_TDD_FR1_D			
		NR_FDD_FR1_E			-119
		NR_TDD_FR1_E			
		NR_FDD_FR1_F			-118.5
		NR_FDD_FR1_G			-118
		NR_FDD_FR1_H			-117.5
	Config 3,6	NR_FDD_FR1_A		-81.65	-118
		NR_TDD_FR1_A NOTE 6			
		NR_FDD_FR1_B			-117.5
		NR_TDD_FR1_C			-117
		NR_FDD_FR1_D			-116.5
		NR_TDD_FR1_D			
		NR_FDD_FR1_E			-116
		NR_TDD_FR1_E			
		NR_FDD_FR1_F			-115.5
		NR_FDD_FR1_G			-115
		NR_FDD_FR1_H			-114.5
Io ^{Note3}	Config 1,2,4,5	NR_FDD_FR1_A	dBm/ 9.36MHz	-56.28	-87.76
		NR_TDD_FR1_A NOTE 6			
		NR_FDD_FR1_B			-87.26
		NR_TDD_FR1_C			-86.76
		NR_FDD_FR1_D			-86.26
		NR_TDD_FR1_D			
		NR_FDD_FR1_E			-85.76
		NR_TDD_FR1_E			
		NR_FDD_FR1_F			-85.26
		NR_FDD_FR1_G			-84.76
		NR_FDD_FR1_H			-84.26
	Config 3,6	NR_FDD_FR1_A	dBm/ 38.16MHz	-50.19	-84.76
		NR_TDD_FR1_A NOTE 6			
		NR_FDD_FR1_B			-84.26
		NR_TDD_FR1_C			-83.76
		NR_FDD_FR1_D			-83.26
		NR_TDD_FR1_D			
		NR_FDD_FR1_E			-82.76
		NR_TDD_FR1_E			
		NR_FDD_FR1_F			-82.26
		NR_FDD_FR1_G			-81.76
		NR_FDD_FR1_H			-81.26
Propagation condition			-	AWGN	

Antenna configuration	-	1x2
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.	
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.	
Note 3:	SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.	
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.	
Note 5:	NR operating band groups are as defined in clause 3.5.2.	
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.	

A.8.5.2.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.1 in TS 36.133 [15].

A.8.5.2.1.2 E-UTRAN – NR inter-RAT measurements with FR2 target cell

A.8.5.2.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.1 in TS 36.133 [15] for inter-RAT FR2 SS-RSRP measurements.

A.8.5.2.1.2.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.1.2.2-1. In this test case there are two cells on different carriers. Absolute accuracy requirements of SS-RSRP inter-RAT measurement are tested by using test setup in Table A.8.5.2.1.2.2-2 and Table A.8.5.2.1.2.2-3. In all test cases, Cell 2 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.8.5.2.1.2.2-1: SS-RSRP Inter-RAT SS-RSRP supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.8.5.2.1.2.2-2: SS-RSRP Inter-RAT general test parameters

Parameter	Unit	Test 1	Test 2
		Cell 2	Cell 2
SSB ARFCN		Freq1	freq1
Duplex mode		TDD	TDD
TDD configuration		TDDConf.3.1	TDDConf.3.1
BW _{channel}	MHz	100: N _{RB,C} = 66	100: N _{RB,C} = 66
Downlink initial BWP configuration		DLBWP.0.1	
Uplink initial BWP configuration		ULBWP.0.1	
DRX cycle configuration	ms	Not applicable	
PDSCH Reference measurement channel		-	-
RMSI CORESET Reference Channel		-	-
OCNG Patterns		OP.1	OP.1
SMTc configuration		SMTc.1	SMTc.1
SSB configuration		SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			

EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Void			
Note 3: Void			
Note 4: Void			

Table A.8.5.2.1.2.2-3: SS-RSRP Inter-RAT OTA related test parameters

Parameter	Unit	Test 1	Test 2
		Cell 2	Cell 2
Angle of arrival configuration		Setup 1 according to A.3.15.1	Setup 1 according to A.3.15.1
Assumption for UE beams ^{Note 10}		Rough	Rough
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-105	N/A
N_{oc} ^{Note1}	dBm/SCS ^{Note4}	-96	N/A
E_s	dBm/SCS ^{Note4}		(Table B.2.3-2 Rx Beam Peak +1dB) (Note 7)
$\hat{E}_s / N_{oc}$	dB	11	N/A
SSB_RP ^{Note2}	dBm/SCS ^{Note4}	-85	(Table B.2.3-2 Rx Beam Peak +1dB) (Note 7)
$\hat{E}_s / I_{ot_BB}$ ^{Note 2, Note 9}	dB	9.97	-3.81
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-55.65	(Table B.2.3-2 Rx Beam Peak +30dB) (Note 8)
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone. Note 5: Void Note 6: Void Note 7: SSB_RP is applied at 1dB above the minimum level specified in Table B.2.3-2 for beam peak. Note 8: I_o is applied at $10\log_{10}(792)\text{dB}+1\text{dB}$ above the minimum level specified in Table B.2.3-2 for beam peak. Note 9: Calculation of E_s/I_{ot_BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 36.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4. Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.			

A.8.5.2.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.1 in TS 36.133 [15].

A.8.5.2.2 SS-RSRQ

A.8.5.2.2.1 E-UTRAN – NR inter-RAT measurements with FR1 target cell

A.8.5.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.2 in TS 36.133 [15] for inter-RAT FR1 SS-RSRQ measurements.

A.8.5.2.2.1.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.2.1.2-1. In this test case there are two cells on different carriers. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1. Cell 2 is the inter-RAT NR FR1 target cell. The absolute accuracy requirements of SS-RSRP inter-RAT measurement is tested by using test parameters in Table A.8.5.2.2.1.2-2.

Table A.8.5.2.2.1.2-1: SS-RSRQ Inter-RAT SS-RSRQ supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.8.5.2.2.1.2-2: SS-RSRQ inter-RAT test parameters

Parameter			Unit	Test 1 Cell 2	Test 2 Cell 2	Test 3 Cell 2
SSB ARFCN				freq1	freq1	freq1
Duplex mode	Config 1,4			FDD		
	Config 2,3,5,6			TDD		
TDD configuration	Config 1,4			Not Applicable		
	Config 2,5			TDDConf.1.1		
	Config 3,6			TDDConf.2.1		
Downlink initial BWP configuration				DLBWP.0.1		
Uplink initial BWP configuration				ULBWP.0.1		
DRX Cycle configuration			ms	Not Applicable		
PDSCH Reference measurement channel	Config 1,4			-	-	-
	Config 2,5					
	Config 3,6					
RMSI CORESET Reference Channel	Config 1,4			-	-	-
	Config 2,5					
	Config 3,6					
Dedicated CORESET Reference Channel	Config 1,4			-	-	-
	Config 2,5					
	Config 3,6					
OCNG Patterns				OP.1		
SS-RSSI-Measurement				Not Applicable		
SMTC configuration				SMTC.1		
SSB configuration	Config 1,2,4,5			SSB.1 FR1		
	Config 3,6			SSB.2 FR1		
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5		kHz	15		
	Config 3,6			30		
EPRE ratio of PSS to SSS			dB	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	Config 1,2,4,5	NR_FDD_FR1_A	dBm/15k Hz	-80.18	-106	-116
		NR_TDD_FR1_A				
		NOTE 6				
		NR_FDD_FR1_B				-115.5
		NR_TDD_FR1_C				-115
		NR_FDD_FR1_D				-114.5
		NR_TDD_FR1_D				
		NR_FDD_FR1_E				-114
		NR_TDD_FR1_E				
		NR_FDD_FR1_F				-113.5
		NR_FDD_FR1_G				-113
		NR_FDD_FR1_H				-112.5
	Config 3,6			-86.27	-113	Same as Noc for Config 1,2,4,5
N_{oc} ^{Note2}	Config 1,2,4,5		dBm/SC S	-80.18	-106	Same as Noc for 15kHz
	Config 3,6	NR_FDD_FR1_A		-83.27	-110	-113

		NR_TDD_FR1_A NOTE 6						
		NR_FDD_FR1_B				-112.5		
		NR_TDD_FR1_C				-112		
		NR_FDD_FR1_D				-111.5		
		NR_TDD_FR1_D						
		NR_FDD_FR1_E				-111		
		NR_TDD_FR1_E						
		NR_FDD_FR1_F				-110.5		
		NR_FDD_FR1_G				-110		
		NR_FDD_FR1_H				-109.5		
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	-1.75		
$\hat{E}_s / N_{oc}$			dB	-1.75	-1.75	-1.75		
SS-RSRP ^{Note3}	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SC S	-81.93	-107.75	-117.75		
		NR_FDD_FR1_B				-117.25		
		NR_TDD_FR1_C				-116.75		
		NR_FDD_FR1_D				-116.25		
		NR_TDD_FR1_D						
		NR_FDD_FR1_E				-115.75		
		NR_TDD_FR1_E						
		NR_FDD_FR1_F				-115.25		
		NR_FDD_FR1_G				-114.75		
		NR_FDD_FR1_H				-114.25		
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85.02	-111.75	-114.75		
		NR_FDD_FR1_B				-114.25		
		NR_TDD_FR1_C				-113.75		
		NR_FDD_FR1_D				-113.25		
		NR_TDD_FR1_D						
		NR_FDD_FR1_E				-112.75		
		NR_TDD_FR1_E						
		NR_FDD_FR1_F				-112.25		
		NR_FDD_FR1_G				-111.75		
		NR_FDD_FR1_H				-111.25		
SS-RSRQ ^{Note3}		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-14.77	-40.59	-14.76		
		NR_FDD_FR1_B						
		NR_TDD_FR1_C						
		NR_FDD_FR1_D						
		NR_TDD_FR1_D						
		NR_FDD_FR1_E						
		NR_TDD_FR1_E						
		NR_FDD_FR1_F						
		NR_FDD_FR1_G						
		NR_FDD_FR1_H						
		Io ^{Note3}	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-50	-75.83	-85.83
				NR_FDD_FR1_B				-85.33
				NR_TDD_FR1_C				-84.83
				NR_FDD_FR1_D				-84.33
				NR_TDD_FR1_D				
				NR_FDD_FR1_E				-83.83
NR_TDD_FR1_E								
		NR_FDD_FR1_F				-83.33		

Config 3,6	NR_FDD_FR1_G	dBm/ 38.16MH Z	-50	-76.73	-82.83
	NR_FDD_FR1_H				-82.33
	NR_FDD_FR1_A				-79.73
	NR_TDD_FR1_A NOTE 6				
	NR_FDD_FR1_B				-79.23
	NR_TDD_FR1_C				-78.73
	NR_FDD_FR1_D				-78.23
	NR_TDD_FR1_D				
	NR_FDD_FR1_E				-77.73
	NR_TDD_FR1_E				
	NR_FDD_FR1_F				-77.23
	NR_FDD_FR1_G				-76.73
	NR_FDD_FR1_H				-76.53
Propagation condition		-	AWGN		
Antenna configuration		-	1x2		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3:	SS-RSRQ, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4:	SS-RSRQ minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5:	NR operating band groups are as defined in clause 3.5.2.				
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.				

A.8.5.2.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.2 in TS 36.133 [15].

A.8.5.2.2.2 E-UTRAN – NR inter-RAT measurements with FR2 target cell

A.8.5.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.2 in TS 36.133 [15] for inter-RAT FR2 SS-RSRQ measurements.

A.8.5.2.2.2.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.2.2.2-1. In this test case there are two cells on different carriers. Absolute accuracy requirements of SS-RSRQ inter-RAT measurement are tested by using test setup in Table A.8.5.2.2.2.2-2 and Table A.8.5.2.2.2.2-3. In all test cases, Cell 2 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.8.5.2.2.2-1: SS-RSRQ Inter-RAT SS-RSRQ supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.8.5.2.2.2-2: SS-RSRQ Inter-RAT general test parameters

Parameter	Unit	Test 1	Test 2
		Cell 2	Cell 2
SSB ARFCN		Freq1	freq1
Duplex mode		TDD	TDD

TDD configuration		TDDConf.3.1	TDDConf.3.1
BW _{channel}	MHz	100: N _{RB,c} = 66	100: N _{RB,c} = 66
Downlink initial BWP configuration		DLBWP.0.1	
Uplink initial BWP configuration		ULBWP.0.1	
DRX cycle configuration	ms	Not applicable	
PDSCH Reference measurement channel		-	-
RMSI CORESET Reference Channel		-	-
OCNG Patterns		OP.1	OP.1
SMTC configuration		SMTC.1	SMTC.1
SSB configuration		SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120
EPRE ratio of PSS to SSS	dB	0	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Void			
Note 3: Void			
Note 4: Void			

Table A.8.5.2.2.2-3: SS-RSRQ Inter-RAT OTA related test parameters

Parameter	Unit	Test 1	Test 2
		Cell 2	Cell 2
Angle of arrival configuration		Setup 1 according to A.3.15.1	Setup 1 according to A.3.15.1
Assumption for UE beams ^{Note 10}		Rough	Rough
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-104.7	(Table B.2.3-2 Rx Beam Peak -5dB) (Note 7)
N_{oc} ^{Note1}	dBm/SCS ^{Note4}	-95.7	(Table B.2.3-2 Rx Beam Peak +4dB) (Note 7)
$\hat{E}_s / N_{oc}$	dB	-0.5	-1.75
SSB_RP ^{Note2}	dBm/SCS ^{Note4}	-96.2	(Table B.2.3-2 Rx Beam Peak +2.25dB) (Note 8)
SS-RSRQ ^{Note2}	dB	-3.27	-14.82
$\hat{E}_s / I_{ot}$ ^{Note2}	dB	-0.5	-1.75
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-63.95	(Table B.2.3-2 Rx Beam Peak +35.22dB) (Note 9)
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: SSB_RP, SS-RSRQ, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3: Void			
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone.			

Note 5:	Void
Note 6:	Void
Note 7:	N_{oc} for SCS 15kHz is applied at $-10\log_{10}(8)+4\text{dB}$ above the minimum level specified in Table B.2.3-2 for beam peak. N_{oc} for SCS 120kHz is applied at 4dB above the minimum level specified in Table B.2.3-2 for beam peak.
Note 8:	SSB_RP is applied at 2.25dB above the minimum level specified in Table B.2.3-2 for beam peak.
Note 9:	I_o is applied at $10\log_{10}(792)+6.22\text{dB}$ above the minimum level specified in Table B.2.3-2 for beam peak.
Note 10:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.

A.8.5.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.2 in TS 36.133 [15].

In this test case there are two cells on different carriers and measurement gaps are provided

A.8.5.2.3 SS-SINR

A.8.5.2.3.1 E-UTRAN – NR inter-RAT measurements with FR1 target cell

A.8.5.2.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS- SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.3 in TS 36.133 [15] for inter-RAT FR1 SS-SINR measurements.

A.8.5.2.3.1.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.3.1.2-1. In this test case there are two cells on different carriers. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1. Cell 2 is the inter-RAT NR FR1 target cell. The absolute accuracy requirements of SS-RSRP inter-RAT measurement is tested by using test parameters in Table A.8.5.2.3.1.2-2.

Table A.8.5.2.3.1.2-1: SS- SINR Inter-RAT SS- SINR supported test configurations

Config	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations

Table A.8.5.2.3.1.2-2: SS-SINR inter-RAT test parameters

Parameter		Unit	Test 1 Cell 2	Test 2 Cell 2	Test 3 Cell 2
SSB ARFCN			freq1	freq1	freq1
Duplex mode	Config 1,4		FDD		
	Config 2,3,5,6		TDD		
TDD configuration	Config 1,4		Not Applicable		
	Config 2,5		TDDConf.1.1		
	Config 3,6		TDDConf.2.1		
Downlink initial BWP configuration			DLBWP.0.1		
Uplink initial BWP configuration			ULBWP.0.1		
DRX Cycle configuration		ms	Not Applicable		

PDSCH Reference measurement channel		Config 1,4		-		-		-		
		Config 2,5								
		Config 3,6								
RMSI CORESET Reference Channel		Config 1,4		-		-		-		
		Config 2,5								
		Config 3,6								
Dedicated CORESET Reference Channel		Config 1,4		-		-		-		
		Config 2,5								
		Config 3,6								
OCNG Patterns				OP.1						
SS-RSSI-Measurement				Not Applicable						
SMTc configuration				SMTc.1						
SSB configuration		Config 1,2,4,5		SSB.1 FR1						
		Config 3,6		SSB.2 FR1						
PDSCH/PDCCH subcarrier spacing		Config 1,2,4,5	kHz	15						
		Config 3,6		30						
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS										
EPRE ratio of PBCH to PBCH DMRS										
EPRE ratio of PDCCH DMRS to SSS										
EPRE ratio of PDCCH to PDCCH DMRS										
EPRE ratio of PDSCH DMRS to SSS										
EPRE ratio of PDSCH to PDSCH										
EPRE ratio of OCNG DMRS to SSS ^(Note 1)										
EPRE ratio of OCNG to OCNG DMRS ^(Note 1)										
N_{oc} ^{Note2}	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A ^{NOTE 6}	dBm/15k Hz	-880	-108.5	-119.5				
		NR_FDD_FR1_B								-119
		NR_TDD_FR1_C								-118.5
		NR_FDD_FR1_D NR_TDD_FR1_D								-118
		NR_FDD_FR1_E NR_TDD_FR1_E								-117.5
		NR_FDD_FR1_F								-117
		NR_FDD_FR1_G								-116.5
		NR_FDD_FR1_H								-116
		N_{oc} ^{Note2}								Config 1,2,4,5
Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A ^{NOTE 6}		-85	-105.5	-116.5					
	NR_FDD_FR1_B						-116			
	NR_TDD_FR1_C						-115.5			
	NR_FDD_FR1_D NR_TDD_FR1_D						-115			
	NR_FDD_FR1_E NR_TDD_FR1_E						-114.5			
	NR_FDD_FR1_F						-114			
	NR_FDD_FR1_G						-114.5			
	NR_FDD_FR1_H						-113]			
	$\hat{E}_s/I_{ot}$						dB	-1.75		20
$\hat{E}_s/N_{oc}$			dB	-1.75		20		-4.0		

SS-RSRP ^{Note3}	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SC S	-89.75	-88.5	-123.5
		NR_FDD_FR1_B				-123
		NR_TDD_FR1_C				-122.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-122
		NR_FDD_FR1_E NR_TDD_FR1_E				-121.5
		NR_FDD_FR1_F				-121
		NR_FDD_FR1_G				-120.5
		NR_FDD_FR1_H				-120
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-86.75	-85.5	-120.5
		NR_FDD_FR1_B				-120
		NR_TDD_FR1_C				-119.5
		NR_FDD_FR1_D NR_TDD_FR1_D				-119
		NR_FDD_FR1_E NR_TDD_FR1_E				-118.5
		NR_FDD_FR1_F				-118
		NR_FDD_FR1_G				-117.5
		NR_FDD_FR1_H				-117
SS-SINR ^{Note3}		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-1.75	20	-4.0
		NR_FDD_FR1_B				
		NR_TDD_FR1_C				
		NR_FDD_FR1_D NR_TDD_FR1_D				
		NR_FDD_FR1_E NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
Io ^{Note3}	Config 1,2,4,5	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.83	-60.5	-90.09
		NR_FDD_FR1_B				-89.59
		NR_TDD_FR1_C				-89.09
		NR_FDD_FR1_D NR_TDD_FR1_D				-88.59
		NR_FDD_FR1_E NR_TDD_FR1_E				-88.09
		NR_FDD_FR1_F				-87.59
		NR_FDD_FR1_G				-87.09
		NR_FDD_FR1_H				-86.59
	Config 3,6	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-51.73	-54.41	-84
		NR_FDD_FR1_B				-83.5
		NR_TDD_FR1_C				-83
		NR_FDD_FR1_D NR_TDD_FR1_D				-82.5
		NR_FDD_FR1_E NR_TDD_FR1_E				-82
		NR_FDD_FR1_F				-81.5
		NR_FDD_FR1_G				-81
		NR_FDD_FR1_H				-80.5

Propagation condition	-	AWGN
Antenna configuration	-	1x2
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.	
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.	
Note 3:	SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.	
Note 4:	SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.	
Note 5:	NR operating band groups are as defined in clause 3.5.2.	
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.	

A.8.5.2.3.1.3 Test Requirements

The SS-SINR measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.3 in TS 36.133 [15].

A.8.5.2.3.2 E-UTRAN – NR inter-RAT measurements with FR2 target cell

A.8.5.2.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS- SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.11.3 in TS 36.133 [15] for inter-RAT FR2 SS-SINR measurements.

A.8.5.2.3.2.2 Test Parameters

Supported test configurations are shown in Table A.8.5.2.3.2.2-1. In this test case there are two cells on different carriers. Absolute accuracy requirements of SS-SINR inter-RAT measurement are tested by using test setup in Table A.8.5.2.3.2.2-2 and A.8.5.2.3.2.2-3. In all test cases, Cell 2 is target cell. Cell 1 is the E-UTRA cell which specific test parameters for this test case are specified in Table A.3.7.2.1-1.

Table A.8.5.2.3.2.2-1: SS-SINR Inter-RAT SS-SINR supported test configurations

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.8.5.2.3.2.2-2: SS-SINR Inter-RAT general test parameters

Parameter	Unit	Test 1	Test 2	Test 3
		Cell 2	Cell 2	Cell 2
SSB ARFCN		Freq1	freq1	freq1
Duplex mode		TDD	TDD	TDD
TDD configuration		TDDConf.3.1	TDDConf.3.1	TDDConf.3.1
BW _{channel}	MHz	100: N _{RB,C} = 66	100: N _{RB,C} = 66	100: N _{RB,C} = 66
Downlink initial BWP configuration		DLBWP.0.1		
Uplink initial BWP configuration		ULBWP.0.1		
DRX cycle configuration	ms	Not applicable		
PDSCH Reference measurement channel		-	-	-
RMSI CORESET Reference Channel		-	-	-
OCNG Patterns		OP.1	OP.1	OP.1
SMTc configuration		SMTc.1	SMTc.1	SMTc.1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				

EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void				

Table A.8.5.2.3.2.2-3: SS-SINR Inter-RAT OTA related test parameters

Parameter	Unit	Test 1	Test 2	Test 3
		Cell 2	Cell 2	Cell 2
Angle of arrival configuration		Setup 1 according to A.3.15.1	Setup 1 according to A.3.15.1	Setup 1 according to A.3.15.1
Assumption for UE beams ^{Note 10}		Rough	Rough	Rough
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-104.7	-104.7	(Table B.2.3-2 Rx Beam Peak -5dB) (Note 7)
N_{oc} ^{Note1}	dBm/SCS ^{Note4}	-95.7	-95.7	(Table B.2.3-2 Rx Beam Peak +4dB) (Note 7)
$\hat{E}_s / N_{oc}$	dB	-0.5	11	-1.0
SSB_RP ^{Note2}	dBm/SCS ^{Note4}	-96.2	-84.7	(Table B.2.3-2 Rx Beam Peak +3dB) (Note 8)
SS-SINR ^{Note2}	dB	-0.5	11	-1.0
$\hat{E}_s / I_{ot}$ ^{Note2}	dB	-0.5	11	-1.0
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-63.95	-55.38	(Table B.2.3-2 Rx Beam Peak +35.54dB) (Note 9)
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SSB_RP, SS-SINR, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: Void Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone. Note 5: Void Note 6: Void Note 7: N_{oc} for SCS 15kHz is applied at $-10\log_{10}(8)+4$dB above the minimum level specified in Table B.2.3-2 for beam peak. N_{oc} for SCS 120kHz is applied at 4dB above the minimum level specified in Table B.2.3-2 for beam peak. Note 8: SSB_RP is applied at 3dB above the minimum level specified in Table B.2.3-2 for beam peak. Note 9: I_o is applied at level $10\log_{10}(792)+6.54$dB above the minimum level specified in Table B.2.3-2 for beam peak. Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation.				

A.8.5.2.3.2.3 Test Requirements

The SS-SINR measurement accuracy for Cell 2 shall fulfil the requirement in clause 9.11.3 in TS 36.133 [15].

A.9 V2X Tests

A.9.1 V2X Tests in FR1

A.9.1.1 Test for V2X UE Transmit Timing

A.9.1.1.1 Test for GNSS as Synchronization Reference Source

A.9.1.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the UE timing requirements as specified in clause 12.2.2, when the GNSS is used as timing reference. For this test, the UE is triggered by the test loop function to transmit for V2X sidelink communication.

Table A.9.1.1.1.1-1 defines test parameters for UE transmit timing accuracy tests for V2X. There is one GNSS based synchronization source during the test. The test system can emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1.

Table A.9.1.1.1.1-1: V2X Sidelink Test Parameters for UE Transmit Timing Tests for GNSS as Timing Reference

Parameter	Unit	Value	Comment
RF Channel Number		1	HD carrier in Band n47 or n38
Channel Bandwidth (BW_{channel}) ^{Note 1}	MHz	20 ($N_{RB,c} = 50$) or 40 ($N_{RB,c} = 100$)	
SCS	kHz	30	
Active cell		None	
Active SyncRef UE		None	
V2X sidelink communication preconfiguration		As specified in section A.3.21.2	IE values unless specified otherwise in this test.
PSCCH Reference Measurement Channel		CC.1A HD	As specified in Table A.3.21.3-1
PSSCH Reference Measurement Channel		CD.1A HD	As specified in Table A.3.21.3-2
Propagation condition		AWGN	
Note 1: The UE is only required to be tested in one of the supported test configurations.			

A.9.1.1.1.2 Test requirements

For parameters specified in Tables A.9.1.1.1-1, the timing accuracy for V2X sidelink transmission shall be within the limits defined in clause 12.2.2. The timing accuracy is verified by using PSSCH transmissions.

A.9.1.1.2 Test for SyncRef UE as Synchronization Reference Source

A.9.1.1.2.1 Test Purpose and Environment

The purpose of this test is to verify the timing requirements for V2X sidelink transmissions specified in clause 12.2.5, when SyncRef UE is used as timing reference. For this test, the UE is triggered by the test loop function to transmit for V2X sidelink communication.

Table A.9.1.1.2.1-1 defines test parameters for UE transmit timing accuracy tests for V2X sidelink Communication. There is one active SyncRef UE in this test without either serving cell and or GNSS signals. Before the test starts, the UE has been synchronized to the SyncRef UE. The transmit timing accuracy is verified by using the transmission timing of PSSCH transmissions.

Table A.9.1.1.2.1-1: General Test Parameters for V2X UE Transmit Timing Test for SyncRef UE as Timing Reference

Parameter		Unit	Value	Comment
RF Channel Number			1	HD carrier in Band n47 or n38
Channel Bandwidth (BW_{channel}) ^{Note 3}		MHz	20 ($N_{RB,c} = 50$) or 40 ($N_{RB,c} = 100$)	
SCS		kHz	30	
Active cell			None	
Active SyncRef UE			SyncRef UE 1	Transmitting S-SSB on RF channel number 1
V2X sidelink communication preconfiguration			As specified in section A.3.21.2	IE values unless specified otherwise in this test.
PSCCH Reference Measurement Channel			CC.1A HD	As specified in Table A.3.21.3-1
PSSCH Reference Measurement Channel			CD.1A HD	As specified in Table A.3.21.3-2
N_{oc} ^{Note1,2}		dBm/30kHz	-95	
SyncRef UE 1	sl-SSB-TimeAllocation		sl-SSB-TimeAllocation1	
	slssid		30	
	inCoverage		TRUE	In MIB-SL
	networkControlledSyncTx		ON	
	V2X sidelink communication configuration		As specified in section A.3.21.2	IE values unless specified otherwise in this test.
	$\hat{E}_s / N_{oc}$		3	
	PSBCH-RSRP ^{Note1, Note 2}	dBm/30kHz	-92	
Propagation condition			AWGN	
Note 1: PSBCH-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 2: S-PSS E_s/N_{oc} and S-SSS E_s/N_{oc} are set the same as PSBCH E_s/N_{oc} .				
Note 3: The UE is only required to be tested in one of the supported test configurations.				

A.9.1.1.2.2 Test requirements

For parameters specified in Tables A.9.1.1.2.1-1, the timing accuracy for V2X sidelink transmission shall be within the limits defined in clause 12.2.5. The timing accuracy is verified by using PSSCH transmissions.

A.9.1.1.3 Test for FR1 NR Cell as Synchronization Reference Source

A.9.1.1.3.1 Test Purpose and Environment

The purpose of this test is to verify the timing requirements for V2X sidelink transmissions specified in clause 12.2.3, when the downlink timing of the serving cell (RRC_IDLE) or PCell (RRC_CONNECTED) on a non-V2X sidelink carrier is used as timing reference. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X sidelink communication.

This test is applicable for V2X sidelink communication capable UEs that support NR Uu and sidelink operation.

Table A.9.1.1.3.1-1, A.9.1.1.3.1-2 and A.9.1.1.3.1-3 define test parameters for UE transmit timing accuracy tests for V2X sidelink Communication. There is one active cell (PCell) in this test. The transmit timing accuracy is verified by using the transmission timing of PSSCH transmissions.

Table A.9.1.1.3.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	NR Uu: FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR Uu: TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR Uu: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.9.1.1.3.1-2: V2X Sidelink Test Parameters for V2X UE Transmit Timing Accuracy Test for gNB as Timing Reference

Parameter	Unit	Value	Comment
RF Channel Number		1	HD carrier in Band n47 or n38
Channel Bandwidth (BW_{channel}) ^{Note 1}	MHz	20 ($N_{RB,C} = 50$) or 40 ($N_{RB,C} = 100$)	
SCS	kHz	30	
Active cell		Cell 1	
Active SyncRef UE		None	
V2X sidelink communication configuration		As specified in section A.3.21.2	IE values unless specified otherwise in this test.
PSCCH Reference Measurement Channel		CC.1A HD	As specified in Table A.3.21.3-1
PSSCH Reference Measurement Channel		CD.1A HD	As specified in Table A.3.21.3-2
Note 1: The UE is only required to be tested in one of the supported test configurations.			

Table A.9.1.1.3.1-3: Cell Test Parameters for V2X UE Transmit Timing Accuracy Test for gNB as Timing Reference

Parameter	Unit	Cell 1
RF Channel Number		2
Duplex Mode	Config 1	FDD
	Config 2,3	TDD
TDD configuration	Config 1	Not Applicable
	Config 2	TDDConf.1.1
	Config 3	TDDConf.2.1
Channel Bandwidth (BW_{channel})	Config 1,2	10: $N_{RB,C} = 52$
	Config 3	40: $N_{RB,C} = 106$
Initial BWP Configuration		DLBWP.0.1 ULBWP.0.1
Dedicated BWP Configuration		DLBWP.1.1 ULBWP.1.1
DRX Cycle		N/A
PDSCH Reference measurement channel	Config 1	SR.1.1 FDD
	Config 2	SR.1.1 TDD
	Config 3	SR.2.1 TDD
CORESET Reference Channel	Config 1	CR.1.1 FDD
	Config 2	CR.1.1 TDD
	Config 3	CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1	CCR.1.1 FDD
	Config 2	CCR.1.1 TDD
	Config 3	CCR.2.1 TDD
SSB configuration	Config 1,2	SSB.1 FR1

	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.2
OCNG Patterns			OP.1
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} ^{Note2}	Config 1,2,3	dBm/15 kHz	-98
N_{oc} ^{Note2}	Config 1,2	dBm/SCS	-98
	Config 3		-95
$\hat{E}_s/N_{oc}$		dB	3
SS-RSRP ^{Note3}	Config 1,2	dBm/SCS	-95
	Config 3		-92
I_0 ^{Note 3}	Config 1,2	dBm/9.36 MHz	-65.2
	Config 3	dBm/38.1 MHz	-59.2
Propagation Condition			AWGN
Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.9.1.1.3.2 Test requirements

For parameters specified in Tables A.9.1.1.3.1-1 A.9.1.1.3.1-2 and A.9.1.1.3.1-3, the timing accuracy for V2X sidelink transmission shall be within the limits defined in clause 12.2.3. The timing accuracy is verified by using PSSCH transmissions.

A.9.1.2 Test for Initiation/Cease of S-SSB Transmission with V2X Sidelink Communication

A.9.1.2.1 Test for FR1 NR Cell as synchronization reference source without gap under non-DRX

A.9.1.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the V2X UE meets the requirements related to the maximum evaluation time allowed to initiate and cease S-SSB transmissions defined in clause 12.3.1.1, when the reference timing used for sidelink transmissions is a NR serving cell in FR1 on a non-V2X sidelink carrier.

This test is applicable for V2X sidelink communication capable UEs that support NR Uu and sidelink operation.

Supported test configurations for FR1 NR cell are shown in Table A.9.1.2.1.1-1.

Table A.9.1.2.1.1-1: Supported Test Configurations for FR1 NR cell as synchronization reference source

Configuration	Description
---------------	-------------

1	NR Uu: FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR Uu: TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR Uu: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to pass in one of the supported test configurations in FR1.	
Note 2: For NR SL, SL BW is one between 20MHz and 40MHz, and SL SCS is 30kHz.	

The test parameters are given in Table A.9.1.2.1.1-2 and Table A.9.1.2.1.1-3 below. There is one active cell in this test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively.

During T1, the SS-RSRP of the PCell is above *syncTxThreshIC* and the UE is not expected to be transmitting S-SSB.

During T2, the SS-RSRP of the PCell is lowered below *syncTxThreshIC* and the UE is expected to initiate S-SSB transmissions.

During T3, the SS-RSRP of the PCell is increased back to be above *syncTxThreshIC* and the UE is expected to cease S-SSB transmissions.

Table A.9.1.2.1.1-2: Test Parameters for Initiation/Cease of S-SSB Transmission Test for FR1 NR cell as synchronization reference source

Parameter	Unit	Value	Comment
SCS	kHz	30	
Active cell		Cell 1	Serving cell on RF channel number 1
Active SyncRef UE		None	
Active V2X UE		V2X UE	Transmitting S-SSB on RF channel number 2 (HD carrier in Band n47 or n38)
V2X sidelink communication configuration		As specified in Table A.3.21.2-2	IE values unless specified otherwise in this test
networkControlledSyncTx		Not configured	
syncTxThreshIC	dBm/SCS	-110	In SIB12
DRX		OFF	
T1	s	3	
T2	s	5.24	
T3	s	5.24	

Table A.9.1.2.1.1-3: FR1 NR Cell Specific Test Parameters for Initiation/Cease of S-SSB Transmission Test for FR1 NR cell as synchronization reference source

Parameter		Unit	Cell1		
			T1	T2	T3
NR RF Channel Number			1		
Duplex Mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
Channel Bandwidth (BW _{channel})	Config 1,2	MHz	10:NR _{B,C} = 52		
	Config 3		40:NR _{B,C} = 106		
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1		
Dedicated BWP Configuration			DLBWP.1.1		

DRx Cycle		ms	ULBWP.1.1		
			N/A		
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD		
	Config 2		SR.1.1 TDD		
	Config 3		SR.2.1 TDD		
CORESET Reference Channel	Config 1		CR.1.1 FDD		
	Config 2		CR.1.1 TDD		
	Config 3		CR.2.1 TDD		
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD		
	Config 2		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		
SSB configuration	Config 1,2		SSB.1 FR1		
	Config 3		SSB.2 FR1		
SMTc Configuration	Config 1		SMTc.2		
	Config 2,3		SMTc.1		
TRS configuration	Config 1		TRS.1.1 FDD		
	Config 2		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		
OCNG Patterns			OP.1		
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
N_{oc} ^{Note2}	Config 1,2,3	dBm/15 kHz	-110		
	Config 1,2	dBm /SCS	-110		
	Config 3		-107		
$\hat{E}_s / N_{oc}$		dB	4.5	-4.5	4.5
$\hat{E}_s / I_{ot}$		dB	4.5	-4.5	4.5
SS-RSRP ^{Note3}	Config 1,2	dBm /SCS	-105.5	-114.5	-105.5
	Config 3		-102.5	-111.5	-102.5
Io ^{Note3}	Config 1,2	dBm /9.36MHz	-76.2	-80.7	-76.2
	Config 3	dBm/ 38.16MHz	-70.1	-74.6	-70.1
Propagation condition			AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not setttable parameters themselves.					
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					

A.9.1.2.1.2 Test Requirements

The S-SSB transmission initiation delay is defined as the time from the beginning of time period T2 up to the moment when the UE initiates the S-SSB transmission.

The S-SSB transmission initiation delay shall be less than 0.56 s.

The S-SSB transmission cease delay is defined as the time from the beginning of time period T3 up to the moment when the UE ceases the S-SSB transmission.

The S-SSB transmission cease delay shall be less than 0.56 s.

The rate of correct initiation/cease delay of S-SSB transmissions observed during repeated tests shall be at least 90%.

NOTE: The initiation/cease delay of S-SSB transmissions can be expressed as: $T_{\text{evaluate,SLSS}} + \text{S-SSB period}$,

Where:

$T_{\text{evaluate,SLSS}} = 0.4 \text{ sec}$ (as specified in clause 12.3.1.1);

S-SSB period = 160ms.

A.9.1.2.2 Test for SyncRef UE as synchronization reference source

A.9.1.2.2.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to the evaluation time allowed to initiate and cease S-SSB transmissions defined in clause 12.3.1.4, when the reference timing used for sidelink transmissions is a SyncRef UE.

The test parameters are given in Table A.9.1.2.2.1-1 and Table A.9.1.2.2.1-2 below. There are neither active cells nor GNSS signals in this test. There is one active SyncRef UE (SyncRef UE 1) in this test. The test system shall emulate SyncRef UE 1 to transmit S-SSB every synchronization period.

Prior to start of test, test system is required to ensure that the V2X UE is synchronized to the SyncRef UE 1 and is transmitting S-SSB as derived from the S-SSB of SyncRef UE 1 as per clause 5.8.5.3 of TS 38.331[2]. For the test configuration, the SLSSID used by the V2X UE shall be 30 with *inCoverage* IE in MIB-SL set as FALSE. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively.

During T1, the PSBCH-RSRP of SyncRef UE 1 is above *syncTxThreshOOC* and the UE is not expected to be transmitting S-SSB.

During T2, the PSBCH-RSRP of SyncRef UE 1 is lowered below *syncTxThreshOOC* and the UE is expected to initiate S-SSB transmissions.

During T3, the PSBCH-RSRP of SyncRef UE 1 is increased back to be above *syncTxThreshOOC* and the UE is expected to cease S-SSB transmissions.

Table A.9.1.2.2.1-1: Test Parameters for Initiation/Cease of S-SSB Transmission Test for SyncRef UE as synchronization reference source

Parameter	Unit	Value	Comment
SCS	kHz	30	
Active cell		None	
Active SyncRef UE		SyncRef UE 1	Transmitting S-SSB on RF channel number 1(HD carrier in Band n47 or n38)
Active V2X UE		V2X UE	Transmitting S-SSB on RF channel number 1(HD carrier in Band n47 or n38)
V2X sidelink communication preconfiguration		As specified in Table A.3.21.2-2	IE values unless specified otherwise in this test
networkControlledSyncTx		Not configured	
syncTxThreshOoC	dBm/30kHz	-100	
T1	s	3	
T2	s	5.24	

T3	s	5.24	
----	---	------	--

Table A.9.1.2.2.1-2: SyncRef UE Specific Test Parameters for Initiation/Cease of S-SSB Transmission Test for SyncRef UE as synchronization reference source

Parameter	Unit	SyncRef UE 1		
		T1	T2	T3
NR RF Channel Number		1		
V2X SL communication resource pool configuration		As specified in Table A.3.21.2-2		
Channel Bandwidth (BW_{channel}) ^{Note3}	MHz	20($N_{\text{RB},c} = 50$) or 40($N_{\text{RB},c} = 100$)		
SLSSID		30		
inCoverage		TRUE		
networkControlledSyncTx		ON		
N_{oc} ^{Note1}	dBm/30 kHz	-98		
$\hat{E}_s / I_{ot}$	dB	5.5	-3.5	5.5
PSBCH $\hat{E}_s / N_{oc}$	dB	5.5	-3.5	5.5
PSBCH-RSRP ^{Note2}	dBm/30 kHz	-92.5	-101.5	-92.5
I_o ^{Note2}	dBm /18MHz	-63.6	-68.6	-63.6
	dBm/36MHz	-60.6	-65.6	-60.6
Propagation condition		AWGN		
Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: PSBCH-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. I_o level is based on the allocated RBs for S-PSS/S-SSS/PSBCH symbols.				
Note 3: The UE is only required to be tested in one of the supported test configurations.				
Note 4: S-PSS E_s/N_{oc} and S-SSS E_s/N_{oc} are set the same as PSBCH E_s/N_{oc} .				

A.9.1.2.2.2 Test Requirements

The S-SSB transmission initiation delay is defined as the time from the beginning of time period T2 up to the moment when the UE initiates the S-SSB transmission.

The S-SSB transmission initiation delay shall be less than 0.8 s.

The S-SSB transmission cease delay is defined as the time from the beginning of time period T3 up to the moment when the UE ceases the S-SSB transmission.

The S-SSB transmission cease delay shall be less than 0.8 s.

The rate of correct initiation/cease delay of S-SSB transmissions observed during repeated tests shall be at least 90%.

NOTE: The initiation/cease delay of S-SSB transmissions can be expressed as: $T_{\text{evaluate,SLSS}} + \text{S-SSB period}$,

Where:

- $T_{\text{evaluate,SLSS}} = 0.64$ sec (as specified in clause 12.3.1.4);
- S-SSB period = 160ms.

A.9.1.2.3 Test for SyncRef UE as synchronization reference source when SL-DRX is used

A.9.1.2.3.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to the evaluation time allowed to initiate and cease S-SSB transmissions defined in clause 12.3.1.4, when the reference timing used for sidelink transmissions is a SyncRef UE and SL-DRX is used.

The test parameters are given in Table A.9.1.2.3.1-1 and Table A.9.1.2.3.1-2 below. There are neither active cells nor GNSS signals in this test. There is one active SyncRef UE (SyncRef UE 1) in this test. The test system shall emulate SyncRef UE 1 to transmit S-SSB every synchronization period.

Prior to start of test, test system is required to ensure that the V2X UE is synchronized to the SyncRef UE 1 and is transmitting S-SSB as derived from the S-SSB of SyncRef UE 1 as per clause 5.8.5.3 of TS 38.331[2]. For the test configuration, the SLSSID used by the V2X UE shall be 30 with *inCoverage* IE in MIB-SL set as FALSE. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively.

During T1, the PSBCH-RSRP of SyncRef UE 1 is above *syncTxThreshOOC* and the UE is not expected to be transmitting S-SSB.

During T2, the PSBCH-RSRP of SyncRef UE 1 is lowered below *syncTxThreshOOC* and the UE is expected to initiate S-SSB transmissions.

During T3, the PSBCH-RSRP of SyncRef UE 1 is increased back to be above *syncTxThreshOOC* and the UE is expected to cease S-SSB transmissions.

Table A.9.1.2.3.1-1: Test Parameters for Initiation/Cease of S-SSB Transmission Test for SyncRef UE as synchronization reference source when SL-DRX is used

Parameter	Unit	Value	Comment
SCS	kHz	30	
Active cell		None	
Active SyncRef UE		SyncRef UE 1	Transmitting S-SSB on RF channel number 1(HD carrier in Band n47 or n38)
Active V2X UE		V2X UE	Transmitting S-SSB on RF channel number 1(HD carrier in Band n47 or n38)
V2X sidelink communication preconfiguration		As specified in Table A.3.21.2-2	IE values unless specified otherwise in this test
networkControlledSyncTx		Not configured	
syncTxThreshOoC	dBm/30kHz	-97	
SL-DRX		SL-DRX.2	SL-DRX configuration as specified in clause A.3.21.4
T1	s	3	
T2	s	5.24	
T3	s	5.24	

Table A.9.1.2.3.1-2: SyncRef UE Specific Test Parameters for Initiation/Cease of SLSS Transmission Test for SyncRef UE as synchronization reference source when SL-DRX is used

Parameter	Unit	Cell1		
		T1	T2	T3
NR RF Channel Number		1		

V2X SL communication resource pool configuration		As specified in Table A.3.21.2-2		
Channel Bandwidth (BW _{channel}) ^{Note3}	MHz	20(N _{RB,c} = 50) or 40(N _{RB,c} = 100)		
SLSSID		30		
inCoverage		FALSE		
networkControlledSyncTx		ON		
N _{oc} ^{Note1}	dBm/30 kHz	-98		
Ê _s /I _{ot}	dB	5.5	-3.5	5.5
PSBCH Ê _s /N _{oc}	dB	5.5	-3.5	5.5
PSBCH-RSRP ^{Note2}	dBm/30 kHz	-92.5	-101.5	-92.5
I _o ^{Note2}	dBm /3.96MHz	-70.2	-75.2	-70.2
Propagation condition		AWGN		
Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 2: PSBCH-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. I _o level is based on the allocated RBs for PSPSS/PSSSS/PSBCH symbols.				
Note 3: The UE is only required to be tested in one of the supported test configurations.				
Note 4: PSSSS E _s /N _{oc} and PSPSS E _s /N _{oc} are set the same as PSBCH E _s /N _{oc} .				

A.9.1.2.3.2 Test Requirements

The S-SSB transmission initiation delay is defined as the time from the beginning of time period T2 up to the moment when the UE initiates the S-SSB transmission.

The S-SSB transmission initiation delay shall be less than 1.44 s.

The S-SSB transmission cease delay is defined as the time from the beginning of time period T3 up to the moment when the UE ceases the S-SSB transmission.

The S-SSB transmission cease delay shall be less than 1.44 s.

The rate of correct initiation/cease delay of S-SSB transmissions observed during repeated tests shall be at least 90%.

NOTE: The initiation/cease delay of S-SSB transmissions can be expressed as: $T_{\text{evaluate,SLSS}} + \text{S-SSB period}$,

Where:

- $T_{\text{evaluate,SLSS}} = 1.28$ sec (as specified in clause 12.3.1.4);
- S-SSB period = 160ms.

A.9.1.3 Test for V2X Synchronization Reference Selection/Reselection

A.9.1.3.1 Test for GNSS configured as the highest priority

A.9.1.3.1.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to SyncRef UE selection / reselection defined in clause 12.4, when GNSS is configured as the highest priority. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

The test parameters are given in Table A.9.1.3.1.1-1 and A.9.1.3.1.1-2 below. There are no GNSS signals in this test. There are three active SyncRef UEs (SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3) in this test. The test system shall emulate SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3 to transmit S-SSB every S-SSB period.

The test system can verify the selection / reselection of SyncRef UE by monitoring the SLSS ID used by the V2X UE for its S-SSB transmissions. When the V2X UE is not synchronized to any SyncRef UE, then the V2X UE shall use the SLSS ID belonging to set id_{oon}. When the V2X UE is synchronized to a SyncRef UE, the V2X UE shall derive its SLSS ID from the SLSS ID of the SyncRef UE as per clause 5.8.5.3 of TS 38.331[2].

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3 are all powered off before starting the test. During T1, SyncRef UE 1 is powered ON and the V2X UE will select SyncRef UE 1 as synchronization source. During T2, SyncRef UE 2 is powered ON and the V2X UE will select SyncRef UE 2 as the synchronization source. During T3, SyncRef UE 3 is powered ON and the V2X UE will reselect to SyncRef UE 3 as the synchronization source.

Table A.9.1.3.1.1-1: Test Parameters for V2X Synchronization Reference Selection/Reselection Tests for GNSS configured as the highest priority

Parameter		Unit	Value	Comment
SCS		kHz	30	
Initial condition	Active synchronization source		Sync Ref UE 1	DUT transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 30 and in-coverage set as FALSE in MIB-SL.
T2 end condition	Active synchronization source		Sync Ref UE 2	DUT transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 336 and in-coverage set as FALSE in MIB-SL.
Final condition	Active synchronization source		Sync Ref UE 3	UE transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 0 and in-coverage set as FALSE in MIB-SL.
Active SyncRef UEs			SyncRef UE 1 SyncRef UE 2 SyncRef UE 3	Transmitting S-SSB on RF channel number 1 (HD carrier in Band n47 or n38)
Timing offset among SyncRef UEs		μs	CP/2	Synchronous
Frequency offset of SyncRef UE 1,2,3		ppm	0	
V2X sidelink Communication configuration			As specified in Table A. 3.21.2-2	IE values unless specified otherwise in this test.
sl-SyncPriority			gnss	
syncTxThreshOoC			+infinity	syncTxThreshOoC
T1		s	24	
T2		s	16	
T3		s	3.2	

Table A.9.1.3.1.1-2: SyncRef UE Specific Test Parameters for V2X Synchronization Reference Selection/Reselection Tests for GNSS configured as the highest priority

Parameter	Unit	SyncRef UE 1			SyncRef UE 2			SyncRef UE 3		
		T1	T2	T3	T1	T2	T3	T1	T2	T3
NR RF Channel Number		1(HD carrier in Band n47 or n38)								
Channel Bandwidth (BW _{channel}) ^{Note 4}	MHz	20 (N _{RB,C} = 50) or 40 (N _{RB,C} = 100)								
V2X Sidelink Communication resource pool configuration		As specified in Table A.3.21.2-2								
networkControlledSyncTx		ON			N/A			ON		
syncTxThreshOoC	dBm/ 15 kHz	N/A			+infinity			N/A		
SLSSID		30			0			0		
inCoverage (in MIB-SL)		TRUE			FALSE			TRUE		
N _{oc} ^{Note1}	dBm/ 30 kHz	-95								
$\hat{E}_s / N_{oc}$	dB	0	0	0	- infinite y	0	0	- infinite y	- infinite y	3
$\hat{E}_s / I_{ot}$ ^{Note2}	dB	0	0	-4.76	- infinite y	0	0	- infinite y	- infinite y	0
PSBCH-RSRP ^{Note2, Note 3}	dBm/ 30 kHz	-95	-95	-95	- infinite y	-95	-95	- infinite y	- infinite y	-92
I _o ^{Note2}	dBm/ 18 MHz	- 70.78	- 70.78	- 67.78	- 73.79	- 70.78	- 70.78	- 70.78	- 70.78	- 67.78
	dBm/ 36 MHz	- 70.78	- 70.78	- 67.78	- 73.79	- 70.78	- 70.78	- 70.78	- 70.78	- 67.78
Propagation Condition		AWGN								
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.										
Note 2: Es/lot, Io, PSBCH-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.										
Note 3: S-PSS Es/lot and S-SSS Es/lot are set the same as PSBCH Es/lot.										
Note 4: The UE is only required to be tested in one of the supported test configurations.										

A.9.1.3.1.2 Test Requirements

During T1, SyncRef UE selection delay is defined as the time from the beginning of T1 to the time UE is synchronized to SyncRef UE 1, and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 1 as the synchronization source. For the test configuration, the SLSS ID will be changed to 30 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE selection delay from start of T1.

The SyncRef UE selection delay shall be less than 8.8sec. The SyncRef UE selection delay can be expressed as:

$$\text{SyncRef UE selection delay} = T_{\text{detect, SyncRef UE}} + T_{\text{evaluate, SLSS}} + \text{S-SSB period}$$

Where

- $T_{\text{detect,SyncRef UE}} = 8\text{sec}$ (as specified in sub-clause 12.4)
- $T_{\text{evaluate,SLSS}} = 0.64\text{ sec}$ (as specified in sub-clause 12.3)
- S-SSB period = 160ms

This gives a total of 8.8 seconds.

2) During T2, SyncRef UE reselection delay is defined as the time from the beginning of T2 to the time UE changes its synchronization source from SyncRef UE 1 to SyncRef UE 2 and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 2 as the synchronization source. For the test configuration, the SLSS ID will be changed to 336 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE reselection delay from start of T2.

The SyncRef UE reselection delay shall be less than 8.8sec. The SyncRef UE reselection delay can be expressed as:

$$\text{SyncRef UE reselection delay} = T_{\text{detect,SyncRef UE}} + T_{\text{evaluate,SLSS}} + \text{S-SSB period}$$

Where

- $T_{\text{detect,SyncRef UE}} = 8\text{sec}$ (as specified in sub-clause 12.4)
- $T_{\text{evaluate,SLSS}} = 0.64$ (as specified in sub-clause 12.3)
- S-SSB period = 160ms

This gives a total of 8.8 seconds.

3) During T3, SyncRef UE reselection delay is defined as the time from the beginning of T3 to the time UE changes its synchronization source from SyncRef UE 2 to SyncRef UE 3, and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 3 as the synchronization source. For the test configuration, the SLSS ID will still be 0 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE reselection delay from start of T3.

The SyncRef UE reselection delay shall be less than 2.4sec. The SyncRef UE reselection delay can be expressed as:

$$\text{SyncRef UE reselection delay} = T_{\text{detect,SyncRef UE}} + T_{\text{evaluate,SLSS}} + \text{S-SSB period}$$

Where

- $T_{\text{detect,SyncRef UE}} = 1.6\text{sec}$ (as specified in sub-clause 12.4)
- $T_{\text{evaluate,SLSS}} = 0.64$ (as specified in sub-clause 12.3)
- S-SSB period = 160 ms

This gives a total of 2.4 seconds.

The test system will verify that the V2X UE does not drop or delay more than 6% of its V2X data and S-SSB transmissions during the duration of T2, and does not drop or delay more than 30% of its S-SSB transmissions during the duration of T3.

The rate of correct SyncRef UE selection / reselection observed during repeated tests shall be at least 90%.

A.9.1.3.2 Test for FR1 NR Cell configured as the highest priority

A.9.1.3.2.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to SyncRef UE selection / reselection defined in clause 12.4, when gNB is configured as the highest priority. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

This test is applicable for V2X sidelink communication capable UEs that support gNB as synchronization source and sidelink operation.

Table A.9.1.3.2.1-1: Void

The test parameters are given in Table A.9.1.3.2.1-2 and A.9.1.3.2.1-3 below. There are no active cells and GNSS is reliable during the whole test. The test system can emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. There are two active SyncRef UEs (SyncRef UE 1 and SyncRef UE 2) in this test. The test system shall emulate SyncRef UE 1 and SyncRef UE 2 to transmit S-SSB every S-SSB period.

The test system can verify the selection / reselection of SyncRef UE by monitoring the SLSS ID used by the V2X UE for its S-SSB transmissions. When the V2X UE is synchronized to a SyncRef UE, the V2X UE shall derive its SLSS ID from the SLSS ID of the SyncRef UE as per clause 5.8.5.3 of TS 38.331[2].

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. During T1, both SyncRef UE 1 and SyncRef UE 2 are powered off and the V2X UE will select GNSS as synchronization source. During T2, SyncRef UE 1 is powered ON and the V2X UE will select SyncRef UE 1 as the synchronization source. During T3, a higher priority SyncRef UE 2 is additionally powered ON and the V2X UE will reselect to the higher priority SyncRef UE 2 as the synchronization source.

Table A.9.1.3.2.1-2: Test Parameters for V2X Synchronization Reference Selection/Reselection Tests for FR1 NR Cell configured as the highest priority

Parameter		Unit	Value	Comment
SCS		kHz	30	
Initial condition	Active synchronization source		GNSS	DUT transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 0 and in-coverage set as TRUE in MIB-SL.
T2 end condition	Active synchronization source		Sync Ref UE 1	DUT transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 336+59 and in-coverage set as FALSE in MIB-SL.
Final condition	Active synchronization source		Sync Ref UE 2	UE transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 30 and in-coverage set as FALSE in MIB-SL.
Active cell			None	
Active SyncRef UEs			SyncRef UE 1 SyncRef UE 2	Transmitting S-SSB on RF channel number 1
Timing offset between SyncRef UE 1 and SyncRef UE 2		ms	3	Asynchronous
Frequency offset of SyncRef UE 1,2		ppm	0	
V2X sidelink Communication preconfiguration			As specified in Table A.3.21.2-2	IE values unless specified otherwise in this test.
syncPriority			<i>gnb</i>	
syncTxThreshOoC			13 (+infinity)	
T1		s	24	
T2		s	16	
T3		s	16	

Table A.9.1.3.2.1-3: SyncRef UE Specific Test Parameters for V2X Synchronization Reference Selection/Reselection Tests for FR1 NR Cell configured as the highest priority

Parameter	Unit	SyncRef UE 1			SyncRef UE 2		
		T1	T2	T3	T1	T2	T3
NR RF Channel Number		1(HD carrier in Band n47 or n38)					
Channel Bandwidth (BW _{channel}) ^{Note 4}	MHz	20(N _{RB,c} = 50) or 40(N _{RB,c} = 100)					
V2X Sidelink Communication resource pool configuration		As specified in Table A.3.21.2-2			As specified in Table A.3.21.2-2		
networkControlledSyncTx		N/A			ON		
syncTxThreshOoC	dBm/15 kHz	+infinity			N/A		
SLSSID		59			30		
inCoverage (in MIB-SL)		FALSE			TRUE		
N_{oc} ^{Note1}	dBm/30 kHz	-95					
$\hat{E}_s / N_{oc}$	dB	-infinity	0	0	-infinity	-infinity	3
$\hat{E}_s / I_{ot}$ ^{Note2,}	dB	-infinity	0	-4.76	-infinity	-infinity	0
I_o ^{Note2,}	dBm/18MHz	-73.79	-70.78	-70.78	-73.79	-73.79	-70.78
	dBm/36MHz	-73.79	-70.78	-70.78	-73.79	-73.79	-70.78
PSBCH-RSRP ^{Note2, Note 3}	dBm/30 kHz	-infinity	-95	-95	-infinity	-infinity	-92
Propagation Condition		AWGN					
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 2: Es/Iot, Io, PSBCH-RSRP levels have been derived from other parameters for information purposes. They are not setttable parameters themselves.							
Note 3: S-PSS Es/Iot and S-SSS Es/Iot are set the same as PSBCH Es/Iot.							
Note 4: The UE is only required to be tested in one of the supported test configurations.							

A.9.1.3.2.2 Test Requirements

1) During T2, SyncRef UE selection delay is defined as the time from the beginning of T2 to the time UE is synchronized to SyncRef UE 1 and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 1 as the synchronization source. For the test configuration, the SLSS ID will be changed to 336+59 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE selection delay from start of T2.

The SyncRef UE selection delay shall be less than 8.8sec. The SyncRef UE selection/reselection delay can be expressed as:

$$\text{SyncRef UE selection/reselection delay} = T_{\text{detect, SyncRef UE}} + T_{\text{evaluate, SLSS}} + \text{S-SSB period}$$

Where

- $T_{\text{detect, SyncRef UE}} = 8\text{sec}$ (as specified in sub-clause 12.4)
- $T_{\text{evaluate, SLSS}} = 0.64\text{sec}$ (as specified in sub-clause 12.3)
- S-SSB period = 160ms

This gives a total of 8.8 seconds.

2) During T3, SyncRef UE reselection delay is defined as the time from the beginning of T3 to the time UE changes its synchronization source from SyncRef UE 1 to SyncRef UE 2, and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 2 as the synchronization source. For the test configuration, the SLSS ID will be changed to 30 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE selection delay from start of T3.

The SyncRef UE reselection delay shall be less than 8.8sec. The SyncRef UE selection/reselection delay can be expressed as:

$$\text{SyncRef UE selection/reselection delay} = T_{\text{detect, SyncRef UE}} + T_{\text{evaluate, SLSS}} + \text{S-SSB period}$$

Where

- $T_{\text{detect, SyncRef UE}} = 8\text{sec}$ (as specified in sub-clause 12.4)
- $T_{\text{evaluate, SLSS}} = 0.64\text{ sec}$ (as specified in sub-clause 12.3)
- S-SSB period = 160ms

This gives a total of 8.8 seconds.

The test system will verify that the V2X UE does not drop or delay more than 6% of its V2X data and S-SSB transmissions during the duration of T2 and T3.

The rate of correct SyncRef UE selection / reselection observed during repeated tests shall be at least 90%.

A.9.1.3.3 Test for GNSS configured as the highest priority under SL-DRX

A.9.1.3.3.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to SyncRef UE selection / reselection defined in clause 12.4, when GNSS is configured as the highest priority and SL-DRX is configured. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

The test parameters are given in Table A.9.1.3.3.1-1 and A.9.1.3.3.1-2 below. There are no GNSS signals in this test. There are three active SyncRef UEs (SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3) in this test. The test system shall emulate SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3 to transmit S-SSB every S-SSB period.

The test system can verify the selection / reselection of SyncRef UE by monitoring the SLSS ID used by the V2X UE for its S-SSB transmissions. When the V2X UE is not synchronized to any SyncRef UE, then the V2X UE shall use the SLSS ID belonging to set id_{oon}. When the V2X UE is synchronized to a SyncRef UE, the V2X UE shall derive its SLSS ID from the SLSS ID of the SyncRef UE as per clause 5.8.5.3 of TS 38.331[2].

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. SyncRef UE 1, SyncRef UE 2 and SyncRef UE 3 are all powered off before starting the test. During T1, SyncRef UE 1 is powered ON and the V2X UE will select SyncRef UE 1 as synchronization source. During T2, SyncRef UE 2 is powered ON and the V2X UE will select SyncRef UE 2 as the synchronization source. During T3, SyncRef UE 3 is powered ON and the V2X UE will reselect to SyncRef UE 3 as the synchronization source. SL-DRX is configured during the entire test period.

Table A.9.1.3.3.1-1: Test Parameters for V2X Synchronization Reference Selection/Reselection Tests for GNSS configured as the highest priority

Parameter		Unit	Value	Comment
SCS		kHz	30	
Initial condition	Active synchronization source		Sync Ref UE 1	DUT transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 30 and in-coverage set as FALSE in MIB-SL.
T2 end condition	Active synchronization source		Sync Ref UE 2	DUT transmits for V2X Sidelink Communication and S-SSB with

				SLSS ID = 336 and in-coverage set as FALSE in MIB-SL.
Final condition	Active synchronization source		Sync Ref UE 3	UE transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 0 and in-coverage set as FALSE in MIB-SL.
Active SyncRef UEs			SyncRef UE 1 SyncRef UE 2 SyncRef UE 3	Transmitting S-SSB on RF channel number 1 (HD carrier in Band n47 or n38)
Timing offset among SyncRef UEs		μs	CP/2	Synchronous
Frequency offset of SyncRef UE 1,2,3		ppm	0	
V2X sidelink Communication configuration			As specified in Table A. 3.21.2-2	IE values unless specified otherwise in this test.
sl-SyncPriority			gnss	
syncTxThreshOoC			+infinity	syncTxThreshOoC
SL-DRX			SL.DRX.2	As specified in clause A.3.21.4
T1		s	24	
T2		s	16	
T3		s	3.2	

Table A.9.1.3.3.1-2: SyncRef UE Specific Test Parameters for V2X Synchronization Reference Selection/Reselection Tests for GNSS configured as the highest priority

Parameter	Unit	SyncRef UE 1			SyncRef UE 2			SyncRef UE 3		
		T1	T2	T3	T1	T2	T3	T1	T2	T3
NR RF Channel Number		1(TDD carrier in Band n47 or n38)								
Channel Bandwidth (BW _{channel}) ^{Note 4}	MHz	20 (N _{RB,c} = 50) or 40 (N _{RB,c} = 100)								
V2X Sidelink Communication resource pool configuration		As specified in Table A.3.21.2-2								
networkControlledSyncTx		ON			N/A			ON		
syncTxThreshOoC	dBm/15 kHz	N/A			+infinity			N/A		
SLSSID		30			0			0		
inCoverage (in MIB-SL)		TRUE			FALSE			TRUE		
N_{oc} ^{Note1}	dBm/30 kHz	-95								
$\hat{E}_s/N_{oc}$	dB	0	0	0	- infinity	0	0	- infinity	- infinity	3
$\hat{E}_s/I_{ot}$	dB	0	0	- 4.76	- infinity	0	0	- infinity	- infinity	0
PSBCH-RSRP ^{Note2, Note 3}	dBm/30 kHz	-95	-95	-95	- infinity	-95	-95	- infinity	- infinity	-92
Propagation Condition		AWGN								

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: PSBCH-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 3: S-PSS Es/Iot and S-SSS Es/Iot are set the same as PSBCH Es/Iot.

Note 4: The UE is only required to be tested in one of the supported test configurations.

A.9.1.3.3.2 Test Requirements

During T1, SyncRef UE selection delay is defined as the time from the beginning of T1 to the time UE is synchronized to SyncRef UE 1, and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 1 as the synchronization source. For the test configuration, the SLSS ID will be changed to 30 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE selection delay from start of T1.

The SyncRef UE selection delay shall be less than 8.8sec. The SyncRef UE selection delay can be expressed as:

$$\text{SyncRef UE selection delay} = T_{\text{detect, SyncRef UE}} + T_{\text{evaluate, SLSS}} + \text{S-SSB period}$$

Where

- $T_{\text{detect, SyncRef UE}} = 8\text{sec}$ (as specified in sub-clause 12.4)
- $T_{\text{evaluate, SLSS}} = 0.64 \text{ sec}$ (as specified in sub-clause 12.3)
- S-SSB period = 160ms

This gives a total of 8.8 seconds.

2) During T2, SyncRef UE reselection delay is defined as the time from the beginning of T2 to the time UE changes its synchronization source from SyncRef UE 1 to SyncRef UE 2 and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 2 as the synchronization source. For the test configuration, the SLSS ID will be changed to 336 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE reselection delay from start of T2.

The SyncRef UE reselection delay shall be less than 8.8sec. The SyncRef UE reselection delay can be expressed as:

$$\text{SyncRef UE reselection delay} = T_{\text{detect, SyncRef UE}} + T_{\text{evaluate, SLSS}} + \text{S-SSB period}$$

Where

- $T_{\text{detect, SyncRef UE}} = 8\text{sec}$ (as specified in sub-clause 12.4)
- $T_{\text{evaluate, SLSS}} = 0.64$ (as specified in sub-clause 12.3)
- S-SSB period = 160ms

This gives a total of 8.8 seconds.

3) During T3, SyncRef UE reselection delay is defined as the time from the beginning of T3 to the time UE changes its synchronization source from SyncRef UE 2 to SyncRef UE 3, and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 3 as the synchronization source. For the test configuration, the SLSS ID will still be 0 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE reselection delay from start of T3.

The SyncRef UE reselection delay shall be less than 2.4sec. The SyncRef UE reselection delay can be expressed as:

$$\text{SyncRef UE reselection delay} = T_{\text{detect, SyncRef UE}} + T_{\text{evaluate, SLSS}} + \text{S-SSB period}$$

Where

- $T_{\text{detect, SyncRef UE}} = 1.6\text{sec}$ (as specified in sub-clause 12.4)
- $T_{\text{evaluate, SLSS}} = 0.64$ (as specified in sub-clause 12.3)
- S-SSB period = 160 ms

This gives a total of 2.4 seconds.

The test system will verify that the V2X UE does not drop its V2X data and SLSS transmissions at most in an aggregated window of 480ms during the duration of T2, and does not drop or delay at most an aggregated window of 24ms of its S-SSB transmissions during the duration of T3.

The rate of correct SyncRef UE selection / reselection observed during repeated tests shall be at least 90%.

A.9.1.3.4 Test for FR1 NR Cell configured as the highest priority under SL-DRX

A.9.1.3.4.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to SyncRef UE selection / reselection defined in clause 12.4, when gNB is configured as the highest priority and SL-DRX is configured. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

This test is applicable for V2X sidelink communication capable UEs that support gNB as synchronization source and sidelink operation.

The test parameters are given in Table A.9.1.3.4.1-1 and A.9.1.3.4.1-2 below. There are no active cells and GNSS is reliable during the whole test. The test system can emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1. There are two active SyncRef UEs (SyncRef UE 1 and SyncRef UE 2) in this test. The test system shall emulate SyncRef UE 1 and SyncRef UE 2 to transmit S-SSB every S-SSB period.

The test system can verify the selection / reselection of SyncRef UE by monitoring the SLSS ID used by the V2X UE for its S-SSB transmissions. When the V2X UE is synchronized to a SyncRef UE, the V2X UE shall derive its SLSS ID from the SLSS ID of the SyncRef UE as per clause 5.8.5.3 of TS 38.331[2].

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. During T1, both SyncRef UE 1 and SyncRef UE 2 are powered off and the V2X UE will select GNSS as synchronization source. During T2, SyncRef UE 1 is powered ON and the V2X UE will select SyncRef UE 1 as the synchronization source. During T3, a higher priority SyncRef UE 2 is additionally powered ON and the V2X UE will reselect to the higher priority SyncRef UE 2 as the synchronization source. SL-DRX is configured during the entire test period.

Table A.9.1.3.4.1-1: Test Parameters for V2X Synchronization Reference Selection/Reselection Tests for FR1 NR Cell configured as the highest priority

Parameter		Unit	Value	Comment
SCS		kHz	30	
Initial condition	Active synchronization source		GNSS	DUT transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 0 and in-coverage set as TRUE in MIB-SL.
T2 end condition	Active synchronization source		Sync Ref UE 1	DUT transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 336+59 and in-coverage set as FALSE in MIB-SL.
Final condition	Active synchronization source		Sync Ref UE 2	UE transmits for V2X Sidelink Communication and S-SSB with SLSS ID = 30 and in-coverage set as FALSE in MIB-SL.
Active cell			None	
Active SyncRef UEs			SyncRef UE 1 SyncRef UE 2	Transmitting S-SSB on RF channel number 1
Timing offset between SyncRef UE 1 and SyncRef UE 2		ms	3	Asynchronous
Frequency offset of SyncRef UE 1,2		ppm	0	

V2X sidelink Communication preconfiguration		As specified in Table A.3.21.2-2	IE values unless specified otherwise in this test.
syncPriority		<i>gnb</i>	
syncTxThreshOoC		13 (+infinity)	
SL-DRX		SL.DRX.2	As specified in clause A.3.21.4
T1	s	24	
T2	s	16	
T3	s	16	

Table A.9.1.3.4.1-2: SyncRef UE Specific Test Parameters for V2X Synchronization Reference Selection/Reselection Tests for FR1 NR Cell configured as the highest priority

Parameter	Unit	SyncRef UE 1			SyncRef UE 2		
		T1	T2	T3	T1	T2	T3
NR RF Channel Number		1(HD carrier in Band n47 or n38)					
Channel Bandwidth (BW _{channel}) ^{Note 4}	MHz	20(N _{RB,c} = 50) or 40(N _{RB,c} = 100)					
V2X Sidelink Communication resource pool configuration		As specified in Table A.3.21.2-2			As specified in Table A.3.21.2-2		
networkControlledSyncTx		N/A			ON		
syncTxThreshOoC	dBm/15 kHz	+infinity			N/A		
SLSSID		59			30		
inCoverage (in MIB-SL)		FALSE			TRUE		
N _{oc} ^{Note1}	dBm/30 kHz	-95					
$\hat{E}_s/N_{oc}$	dB	-infinity	0	0	-infinity	-infinity	3
$\hat{E}_s/I_{ot}$	dB	-infinity	0	-4.76	-infinity	-infinity	0
PSBCH-RSRP ^{Note2, Note 3}	dBm/30 kHz	-infinity	-95	-95	-infinity	-infinity	-92
Propagation Condition		AWGN					
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.							
Note 2: PSBCH-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 3: S-PSS Es/Iot and S-SSS Es/Iot are set the same as PSBCH Es/Iot.							
Note 4: The UE is only required to be tested in one of the supported test configurations.							

A.9.1.3.4.2 Test Requirements

1) During T2, SyncRef UE selection delay is defined as the time from the beginning of T2 to the time UE is synchronized to SyncRef UE 1 and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 1 as the synchronization source. For the test configuration, the SLSS ID will be changed to 336+59 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE selection delay from start of T2.

The SyncRef UE selection delay shall be less than 8.8sec. The SyncRef UE selection/reselection delay can be expressed as:

$$\text{SyncRef UE selection/reselection delay} = T_{\text{detect, SyncRef UE}} + T_{\text{evaluate, SLSS}} + \text{S-SSB period}$$

Where

- $T_{\text{detect, SyncRef UE}} = 8\text{sec}$ (as specified in sub-clause 12.4)
- $T_{\text{evaluate, SLSS}} = 0.64\text{sec}$ (as specified in sub-clause 12.3)
- S-SSB period = 160ms

This gives a total of 8.8 seconds.

2) During T3, SyncRef UE reselection delay is defined as the time from the beginning of T3 to the time UE changes its synchronization source from SyncRef UE 1 to SyncRef UE 2, and changes its S-SSB transmissions timing and SLSS ID to follow SyncRef UE 2 as the synchronization source. For the test configuration, the SLSS ID will be changed to 30 (with in-coverage IE in MIB-SL set to FALSE) after SyncRef UE selection delay from start of T3.

The SyncRef UE reselection delay shall be less than 8.8sec. The SyncRef UE selection/reselection delay can be expressed as:

$$\text{SyncRef UE selection/reselection delay} = T_{\text{detect, SyncRef UE}} + T_{\text{evaluate, SLSS}} + \text{S-SSB period}$$

Where

- $T_{\text{detect, SyncRef UE}} = 8\text{sec}$ (as specified in sub-clause 12.4)
- $T_{\text{evaluate, SLSS}} = 0.64\text{ sec}$ (as specified in sub-clause 12.3)
- S-SSB period = 160ms

This gives a total of 8.8 seconds.

The test system will verify that the V2X UE does not drop or delay its V2X data and SLSS transmissions at most in an aggregated window of 480ms during the duration of T2 and T3.

The rate of correct SyncRef UE selection / reselection observed during repeated tests shall be at least 90%.

A.9.1.4 Test for L1 SL-RSRP Measurement

A.9.1.4.1 Test for V2X UE Autonomous Resource Selection/Reselection

A.9.1.4.1.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to autonomous resource selection / reselection for V2X UE in mode 2 defined in clause 12.5. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

The test parameters are given in Table A.9.1.4.1.1-1 and A. 9.1.4.1.1-2 below. There are 50 active V2X sidelink UEs (UE0~UE49) in this test. Both the UE under test and active V2X sidelink UEs select GNSS as synchronization reference source. The test system can emulate and send the GNSS signal to the test UE and active V2X sidelink UEs. The test parameters for GNSS signals are defined in B.4.1. The test system shall emulate the active V2X sidelink UEs to transmit PSCCH/PSSCH every 5ms. At the beginning of whole test, the test equipment shall send one AT command to trigger the UE under test continuously transmits PSCCH/PSSCH.

The test consists of two duration T1 and T2. During T1, the signal from Test Equipment are configured such that

- the measured PSSCH-RSRP for 20 active V2X sidelink UEs(UE10~UE29) is above the measurement threshold, and the resource occupied by the 20 active V2X sidelink UEs is expected to be excluded in the resource selection procedure and,
- the measured PSSCH-RSRP for other 30 active V2X sidelink UEs(UE0~UE9, UE30~UE49) is low the measurement threshold, and the resource occupied by the 30 active V2X sidelink UEs is expected to be included in the resource selection procedureDuring T2, the signal from Test Equipment are configured such that

- the measured PSSCH-RSRP or the 20 active V2X sidelink UEs(UE10~UE29) is below the measurement threshold, and the resource occupied by the 20 active V2X sidelink UEs is expected to be included in the resource selection procedure and,
- the measured PSSCH-RSRP for other 30 active V2X sidelink UEs(UE0~UE9, UE30~UE49) is above the measurement threshold, and the resource occupied by the 30 active V2X sidelink UEs is expected to be excluded in the resource selection procedure.

Table A. 9.1.4.1.1-1: Test Parameters for V2X UE Autonomous Resource Selection/Reselection Tests for PSSCH-RSRP measurements

Parameter		Unit	Value	Comment
NR RF Channel Number			1	HD carrier in Band n47 or n38
Channel Bandwidth (BW _{channel}) ^{Note 2}		MHz	20 (N _{RB,C} = 50) or 40 (N _{RB,C} = 100)	
SCS		kHz	30	
V2X sidelink communication pre-configuration			As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool			1111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
sl-NumSubchannel-r16 included in SL-ResourcePool			5	Indicates the number of sub-channels for TX resource pool
sl-SubchannelSize-r16 included in SL-ResourcePool			10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
Number of Active Sidelink UEs			50	Active Sidelink UE i = 0, ..., 49
SL-Thres-RSRP			12	Corresponding -106 dBm as defined in Section 6.3.5 in TS38.331[2] Same for all priority level pairs.
Active Sidelink UEs (UE i = 0, ..., 49)	V2X sidelink Communication preconfiguration		As specified in Table A.3.21.2-1 And A.3.21.2-3	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		{1} ^{Note1}	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool

	sl-StartRB-Subchannel-r16 included in SL-ResourcePool		$\text{floor}(i/10) \times 10$	Indicates the lowest RB index of the subchannel with the lowest index. UE 0~9 start RB=0; UE 10~19 start RB=10; UE 20~29 start RB=20; UE 30~39 start RB=30; UE 40~49 start RB=40;
	sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
	sl-ResourceReservePeriod2-r16	ms	5	
Timing offset among Active Sidelink UEs		μs	CP/2	Synchronous
Note 1: $\{1_i\}$ is a sequence of nine 0's with one 1 in $(\text{mod}(i,10)+1)$ 'th position.				
Note 2: The UE is only required to be tested in one of the supported test configurations.				

Table A.9.1.4.1.1-2: Active Sidelink UE Specific Test Parameters for V2X UE Autonomous Resource Selection/Reselection Tests for PSSCH-RSRP measurements

Parameter	Unit	Active Sidelink UE i (i = 0, ..., 49)	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth (BW_{channel}) ^{Note 5}	MHz	20 ($N_{RB,C} = 50$) or 40 ($N_{RB,C} = 100$)	
PSCCH RMC (defined in A.3.21.3)	-	CC.1A HD	
PSSCH RMC (defined in A.3.21.3)	-	CD.1A HD	
N_{oc} ^{Note1}	dBm/30 kHz	-111	-121
$\hat{E}_s/N_{oc}$ ^{Note3}	dB	10	
$\hat{E}_s/I_{ot}$ ^{Note2,3}	dB	10	
$\hat{E}_s/N_{oc}$ ^{Note4}	dB	0	20
$\hat{E}_s/I_{ot}$ ^{Note2,4}	dB	0	20
PSSCH-RSRP1 ^{Note 2,3}	dBm/SC S	-101	-111
PSSCH-RSRP2 ^{Note 2,4}	dBm/SC S	-111	-101
I_o ^{Note 2}	dBm/18 MHz	-77.42	-74.03
	dBm/36 MHz	-77.42	-74.03
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	

Note 1:	Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	Es/lot, PSSCH-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	For UE 20 to 29, occupying subchannel #2
Note 4:	For UE 0 to 19 and 30 to 49, occupying subchannel #0/1/3/4
Note 5:	The UE is only required to be tested in one of the supported test configurations.

A.9.1.4.1.2 Test Requirements

The test time T1 and T2 should be long enough. The rate of PSSCH transmissions on the resources on subchannel #1 or #2 shall be less than 10% during T1. The rate of PSSCH transmissions on the resources on subchannel #1 or #2 shall be more than 90% during T2.

A.9.1.4.2 Test for V2X UE Resource Pre-emption

A.9.1.4.2.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to autonomous resource pre-emption for V2X UE in mode 2 defined in clause 12.5. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

The test parameters are given in Table A. 9.1.4.2.1-1 and A.12. 9.1.4.1-2 below. There is one active V2X sidelink UE in this test. Both the UE under test and the active V2X sidelink UE select GNSS as synchronization reference source. The test system can emulate and send the GNSS signal to the test UE and active V2X sidelink UEs. The test parameters for GNSS signals are defined in B.4.1. At the beginning of whole test, the test equipment shall send one message with a SL-SCH MAC PDU as specified in Clause 6.1.6 in TS 38.321[7], in order to make sure that the UE under test needs continuously transmit PSCCH/PSSCH.

The test consists of two duration T1 and T2. During T1, the signal from Test Equipment are configured such that the active V2X sidelink UE is not transmitting. The UE under test shall transmit SL data and reserve future resources. The resource reservation is decoded by the active V2X sidelink UE. The point in time at which resource reservation from the UE under test is decoded by the active V2X sidelink UE defines the start of time period T2. During T2, the active V2X sidelink UE reserves the same resource as the UE under test with high priority data no later than slot $n - T_{\text{pre-empt}}$.

Table A.9.1.4.2.1-1: Test Parameters for V2X UE Resource Pre-emption Tests for PSSCH-RSRP measurements

Parameter	Unit	Value	Comment
NR RF Channel Number		1	HD carrier in Band n47 and n38
Channel Bandwidth (BW_{channel}) ^{Note 1}	MHz	20 ($N_{RB,C} = 50$) or 40 ($N_{RB,C} = 100$)	
SCS	kHz	30	
V2X sidelink communication pre-configuration		As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool in SL-ResourcePool in sl-TxPoolSelectedNormal-r16		1000000000000000000	Indicates the time resource of resource pool within <i>sl-Period</i> . (see TS 38.213 [3]) Note that this is for Tx pool.
sl-TimeResource-r16 included in SL-ResourcePool in sl-RxPool-r16		111111111111111111	Indicates the time resource of resource pool within <i>sl-Period</i> . (see TS 38.213 [3]) Note that this is for Rx pool.

sl-NumSubchannel-r16 included in SL-ResourcePool			1	Indicates the number of subchannels in the corresponding resource pool, which consists of contiguous PRBs only
sl-SubchannelSize-r16 included in SL-ResourcePool			10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
sl-StartRB-Subchannel-r16 included in SL-ResourcePool			10	Indicates the lowest RB index of the subchannel with the lowest index.
Number of Active Sidelink UEs			1	
SL-Thres-RSRP			12	Corresponding -106 dBm as defined in Section 6.3.8 in TS38.331[2]
Active Sidelink UEs	V2X sidelink Communication preconfiguration		As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		111111111111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool
	sl-StartRB-Subchannel-r16 included in SL-ResourcePool		10	Indicates the lowest RB index of the subchannel with the lowest index.
	sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
Timing offset among Active Sidelink Ues		μs	CP/2	Synchronous
Note 1: The UE is only required to be tested in one of the supported test configurations.				

Table A.9.1.4.2.1-2: Active Sidelink UE Specific Test Parameters for V2X UE Resource Pre-emption Tests for PSSCH-RSRP measurements

Parameter	Unit	Active Sidelink UE	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth (BW_{channel}) ^{Note 3}	MHz	20 ($N_{RB,C} = 50$) or 40 ($N_{RB,C} = 100$)	
PSCCH RMC (defined in A.3.21.3)	-	CC.1A HD	
PSSCH RMC (defined in A.3.21.3)	-	CD.1A HD	
N_{oc} ^{Note1}	dBm/30 kHz	N/A	-100
PSCCH $\hat{E}_s/N_{oc}$	dB		5
PSSCH $\hat{E}_s/N_{oc}$	dB		5
PSCCH $\hat{E}_s/I_{ot}$ ^{Note2}	dB		5

PSSCH $\hat{E}_s / I_{ot}$ ^{Note2}	dB		5
PSSCH-RSRP ^{Note 2}	dBm/30kHz		-95
I_0 ^{Note 2}	dBm/18MHz		-73.01
	dBm/36MHz		-73.01
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	
Note 1: Interference from other Ues and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: Es/Iot, PSSCH-RSRP and Io have been derived from other parameters for information purposes. They are not setttable parameters themselves.			
Note 3: The UE is only required to be tested in one of the supported test configurations.			

A.9.1.4.2.2 Test Requirements

The test time T1 and T2 should be long enough. The UE under test is required to trigger resource reselection and not to transmit on the reserved resource at slot n when the high priority reservation is transmitted by the active V2X sidelink UE before $n-T_{pre-empt}$, where

$$T_{pre-empt} = T_3 + T_{proc,0}$$

$T_3 = 5$ slots and $T_{proc,0} = 1$ slot for FR1.

The rate of PSSCH transmissions on the resources at slot n shall be less than 10% during repeated tests.

A.9.1.4.3 Test for V2X UE Resource Re-evaluation

A.9.1.4.3.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to autonomous resource re-evaluation for V2X UE in mode 2 defined in clause 12.5. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

The test parameters are given in Table A.9.1.4.3.1-1, A.9.1.4.3.1-2 and A.9.1.4.3.1-3 below. There are 130 active V2X sidelink UEs in this test. The first 100 active V2X sidelink UEs are scheduled with 50ms periodicity. The last 30 active V2X sidelink Ues are aperiodic service UE with retransmission reservation period equaling 15ms.

Both the UE under test and active V2X sidelink Ues select GNSS as synchronization reference source. The test system can emulate and send the GNSS signal to the test UE and active V2X sidelink Ues. The test parameters for GNSS signals are defined in B.4.1.

The test consists of three duration T0, T1, T2.

During T0, the signal from Test Equipment are configured. The resource occupied by the active V2X sidelink UEs is expected to be excluded in the resource selection procedure such that the measured PSSCH-RSRP is above the measurement threshold. The test equipment shall just configure the resource pool for the test UE without the MAC PDU for transmission channel configuration.

During T1, the signal from Test Equipment are configured. Some of the resource occupied by the active V2X sidelink Ues is expected to be excluded in the resource selection procedure such that the measured PSSCH-RSRP is above the measurement threshold and some of the resource occupied by the active V2X sidelink Ues is expected to be included in the resource selection procedure such that the measured PSSCH-RSRP is below the measurement threshold. The test system shall emulate the active V2X sidelink Ues to transmit PSCCH/PSSCH every 50ms according to the RSRP level specified in the Table A. 9.1.4.3.1-2, but UE #0~29 will be silent during T2.

At the end of T1, where slot index mod 100 = 99, the test equipment shall send one message with a SL-SCH MAC PDU as specified in Clause 6.1.6 in TS 38.321[7], in order to make sure that the UE under test shall be scheduled to periodically transmit PSCCH/PSSCH.

During T2, the additional aperiodic active V2X sidelink UEs from Test Equipment are configured in the beginning 30 slots, and the resource occupied by these active V2X sidelink UEs is expected to be excluded in the resource re-evaluation procedure such that the measured PSSCH-RSRP is above the measurement threshold shown in Table A.9.1.4.3.1-2. The test system shall emulate the active V2X sidelink UEs to transmit PSCCH/PSSCH with the maximum number of reserved PSCCH/PSSCH resources equalling n_2 and time resource assignment interval as 15ms.

During T2, the test UE is expected to reselect the resources and transmit the PSCCH/PSSCH in the newly re-evaluated resources.

Table A.9.1.4.3.1-1: Test Parameters for V2X UE Resource Selection Tests for Re-evaluation

Parameter		Unit	Value	Comment
NR RF Channel Number			1	HD carrier in Band n47 and n38
Channel Bandwidth (BW_{channel}) ^{Note 2}		MHz	20 ($N_{RB,c} = 50$) or 40 ($N_{RB,c} = 100$)	
SCS		kHz	30	
V2X sidelink communication pre-configuration			As specified in Table A.3.21.2-2	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool			11111111111111111111 11111111111111111111 11111111111111111111 11111111111111111111 11111111111111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
sl-NumSubchannel-r16 included in SL-ResourcePool			1	Indicates the number of sub-channels for TX resource pool
sl-SubchannelSize-r16 included in SL-ResourcePool			10	
sl-StartRB-Subchannel-r16			0	
Number of Active Sidelink UEs			130	Active Sidelink UE $i = 0, \dots, 129$
SL-Thres-RSRP-r16			13	Corresponding -104 dBm as defined in Section 6.3.5 in TS38.331[2]
Active Sidelink UEs(UE $i=0-99$)	V2X sidelink Communication preconfiguration		As specified in Table A.3.21.2-2	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		{1} ^{Note1}	Indicates the bitmap of the TX resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213 [3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool
	sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the size of sub-channels for TX resource pool
	sl-ResourceReservePeriod 2-r16	ms	50	
Active Sidelink UEs(UE $i=100-129$)	V2X sidelink Communication preconfiguration		As specified in Table A.3.21.2-2	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		{1} ^{Note1}	Indicates the bitmap of the TX resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213 [3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool

	sl-SubchannelSize included in SL-ResourcePool		10	Indicates the size of sub-channels for TX resource pool
	sl-MultiReserveResource-r16		enabled	
	sl-MaxNumPerReserve-r16		n2	
	sl-ResourceReservePeriod2-r16		0	Unit:ms
Timing offset among Active Sidelink UEs		μ s	CP/2	Synchronous
T0		s	1	
T1		ms	50	
T2		ms	50	
Note 1: {1} is a sequence of ninety-nine 0's with one 1 in (mod(i,100)+1)'th position.				
Note 2: The UE is only required to be tested in one of the supported test configurations.				

Table A.9.1.4.3.1-2: Active Sidelink UE Specific Test Parameters for V2X UE Resource Selection Tests for Re-evaluation (UE #0...99)

Parameter	Unit	Active Sidelink UE i (i = 0, ..., 99)	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth (BW _{channel}) ^{Note 7}	MHz	20 (N _{RB,C} = 50) or 40 (N _{RB,C} = 100)	
PSCCH RMC (defined in A.3.21.3)	-	CC.1A HD	
PSSCH RMC (defined in A.3.21.3)	-	CD.1A HD	
N _{oc} ^{Note1}	dBm/SCS	-113	
PSSCH1 $\hat{E}_s/N_{oc}$ ^{Note 3}	dB	16	16
PSSCH2 $\hat{E}_s/N_{oc}$ ^{Note 4}	dB	2	2
PSSCH3 $\hat{E}_s/N_{oc}$ ^{Note 5}	dB	16	-infinity
PSSCH4 $\hat{E}_s/N_{oc}$ ^{Note 6}	dB	2	2
PSSCH1 $\hat{E}_s/I_{ot}$ ^{Note2,3}	dB	16	[-0.11] ^{Note 10}
		16	16 ^{Note 11}
PSSCH2 $\hat{E}_s/I_{ot}$ ^{Note2,4}	dB	2	[-14.11]
PSSCH3 $\hat{E}_s/I_{ot}$ ^{Note2,5}	dB	16	-infinity
PSSCH4 $\hat{E}_s/I_{ot}$ ^{Note2,6}	dB	2	2
PSSCH -RSRP1 ^{Note 2, 3}	dBm/SCS	-97	-97
PSSCH -RSRP2 ^{Note 2, 4}	dBm/SCS	-111	-111
PSSCH -RSRP3 ^{Note 2, 5}	dBm/SCS	-97	-infinity
PSSCH -RSRP4 ^{Note 2, 6}	dBm/SCS	-111	-111
I _o ^{Note 2, 8}	dBm/18 MHz	-76.10	-76.10
	dBm/36 MHz	-76.10	-76.10
I _o ^{Note 2, 9}	dBm/18 MHz	-88.08	[-75.93]
	dBm/36 MHz	-88.08	[-75.93]
I _o ^{Note 2, 10}	dBm/18 MHz	-76.10	[-73.14]
	dBm/36 MHz	-76.10	[-73.14]

Io ^{Note 2, 11}	dBm/18 MHz	-76.10	-76.10
	dBm/36 MHz	-76.10	-76.10
Io ^{Note 2, 12}	dBm/18 MHz	-88.08	-88.08
	dBm/36 MHz	-88.08	-88.08
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	
Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: $\hat{E}_s/I_{ot}$, PSSCH-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3: UE #50~64 and UE #85~99 will periodically occupy the subchannels on the slot with “#slot index mod 100” = #50-64 and #85-99.			
Note 4: UE #30~49 will periodically occupy the subchannels on the slot with “#slot index mod 100” = #30-49.			
Note 5: UE #0~29 will periodically occupy the subchannels on the slot with “#slot index mod 100” = #0-29.			
Note 6: UE #65~84 will periodically occupy the subchannels on the slot with “#slot index mod 100” = #65-84.			
Note 7: The UE is only required to be tested in one of the supported configurations.			
Note 8: Calculated on slot #0~29.			
Note 9: Calculated on slot #30~49.			
Note 10: Calculated on slot #50~59.			
Note 11: Calculated on slot #60~64 and slot #85~99.			
Note 12: Calculated on slot #65~84.			

Table A.9.1.4.3.1-3: Active Sidelink UE Specific Test Parameters for V2X UE Resource Selection Tests for Re-evaluation (UE #100...129)

Parameter	Unit	Active Sidelink UE i (i = 100, .., 129)	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth (BW _{channel}) ^{Note 4}	MHz	20 (N _{RB,c} = 50) or 40 (N _{RB,c} = 100)	
PSCCH RMC (defined in A.3.21.3)	-	CC.1A HD	
PSSCH RMC (defined in A.3.21.3)	-	CD.1 A HD	
N_{oc} ^{Note1}	dBm/SCS	-103	
PSSCH $\hat{E}_s/N_{oc}$	dB	-infinity	16
PSSCH $\hat{E}_s/I_{ot}$ ^{Note2}	dB	-infinity	16 ^{Note 5}
		-infinity	[11.88] ^{Note 6}
		-infinity	[-0.11] ^{Note 7}
PSSCH-RSRP ^{Note 2, Note 3}	dBm/SCS	-infinity	-97
I_o ^{Note 2, 5}	dBm/18 MHz	-76.10	-76.10
	dBm/36 MHz	-76.10	-76.10
I_o ^{Note 2, 6}	dBm/18 MHz	-88.08	[-75.93]
	dBm/36 MHz	-88.08	[-75.93]
I_o ^{Note 2, 7}	dBm/18 MHz	-76.10	[-73.14]
	dBm/36 MHz	-76.10	[-73.14]
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	
Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: E_s/I_{ot} , PSSCH-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3: UE #100~129 will occupy the subchannels on the slots with “#slot index mod 100”= #0-29 during T2.			
Note 4: The UE is only required to be tested in one of the supported configurations.			
Note 5: Calculated on slot #0~29.			
Note 6: Calculated on slot #30~49.			
Note 7: Calculated on slot #50~59.			

A.9.1.4.3.2 Test Requirements

The rate of PSSCH transmissions on the resources of the subchannels which are occupied by UE #65-84 shall be more than 90% during T2.

A.9.1.4.4 Test for V2X UE Autonomous Resource Selection/Reselection with Periodic Sensing

A.9.1.4.4.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to autonomous resource selection / reselection for V2X UE in mode 2 with partial sensing support defined in clause 12.5. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

The test parameters are given in Table A.9.1.4.4.1-1 and A.9.1.4.4.1-2 below. There are 100 active V2X sidelink UEs (UE0~UE99) in this test. Both the UE under test and active V2X sidelink UEs select GNSS as synchronization reference source. The test system can emulate and send the GNSS signal to the test UE and active V2X sidelink UEs. The test parameters for GNSS signals are defined in B.4.1. The test system shall emulate the active V2X sidelink UEs to transmit PSCCH/PSSCH every 10ms. At the beginning of whole test, the test equipment shall send one message with a SL-SCH MAC PDU as specified in Clause 6.1.6 in TS 38.321[7] and ensure that the UE under test needs to continuously transmit PSCCH/PSSCH with 10ms period. Upon receiving the MAC PDU, UE starts resource selection to transmit PSCCH/PSSCH based on the available sensing results.

The test consists of two duration T1 and T2. During T1, the signals from Test Equipment are configured such that

- the measured PSSCH-RSRP for 40 active V2X sidelink UEs (UE20~UE59) is above the measurement threshold, and the resource occupied by the 40 active V2X sidelink UEs is expected to be excluded in the resource selection procedure and,
- the measured PSSCH-RSRP for other 60 active V2X sidelink UEs (UE0~UE19, UE60~UE99) is low the measurement threshold, and the resource occupied by the 60 active V2X sidelink UEs is expected to be included in the resource selection procedure.

During T2, the signals from Test Equipment are configured such that

- the measured PSSCH-RSRP for the 40 active V2X sidelink UEs (UE20~UE59) is below the measurement threshold, and the resource occupied by the 40 active V2X sidelink UEs is expected to be included in the resource selection procedure and,
- the measured PSSCH-RSRP for other 60 active V2X sidelink UEs (UE0~UE19, UE60~UE99) is above the measurement threshold, and the resource occupied by the 60 active V2X sidelink UEs is expected to be excluded in the resource selection procedure.

Table A.9.1.4.4.1-1: Test Parameters for V2X UE Autonomous Resource Selection/Reselection Tests with Periodic Sensing

Parameter	Unit	Value	Comment
NR RF Channel Number		1	TDD carrier in Band n47 or n38
Channel Bandwidth (BW _{channel}) ^{Note 2}	MHz	20 (N _{RB,C} = 50) or 40 (N _{RB,C} = 100)	
SCS	kHz	30	
V2X sidelink communication pre-configuration		As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool		111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by

			repeating the bitmap within a SFN cycle (see TS 38.213[3])
sl-NumSubchannel-r16 included in SL-ResourcePool		5	Indicates the number of sub-channels for TX resource pool
sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
Number of Active Sidelink UEs		100	Active Sidelink UE $i = 0, \dots, 49$
<i>SL-ThresPSSCH-RSRP</i>		12	Corresponding -106 dBm as defined in Section 6.3.5 in TS38.331[2]
Active Sidelink UEs (UE $i = 0, \dots, 99$)	V2X sidelink Communication preconfiguration	As specified in Table A.3.21.2-1 And A.3.21.2-3	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool	{1} ^{Note1}	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
	sl-NumSubchannel-r16 included in SL-ResourcePool	1	Indicates the number of sub-channels for TX resource pool
	sl-StartRB-Subchannel-r16 included in SL-ResourcePool	$\text{floor}(i/20) \times 10$	Indicates the lowest RB index of the subchannel with the lowest index. UE 0~19 start RB=0; UE 20~39 start RB=10; UE 40~59 start RB=20; UE 60~79 start RB=30; UE 80~99 start RB=40;
	sl-SubchannelSize-r16 included in SL-ResourcePool	10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
	sl-ResourceReservePeriod2-r16	ms	10
Timing offset among Active Sidelink UEs		μs	CP/2
			Synchronous
Note 1: {1} is a sequence of nine 0's with one 1 in (mod(i,10)+1)'th position.			
Note 2: The UE is only required to be tested in one of the supported test configurations.			

Table A.9.1.4.4.1-2: Active Sidelink UE Specific Test Parameters for V2X UE Autonomous Resource Selection/Reselection Tests with Periodic Sensing

Parameter	Unit	Active Sidelink UE i ($i = 0, \dots, 99$)	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth (BW_{channel}) ^{Note 5}	MHz	20 ($N_{RB,C} = 50$) or 40 ($N_{RB,C} = 100$)	
SCS	kHz	30	

PSSCH RMC (defined in A.3.21.3)	-	CC.1A HD	
PSSCH RMC (defined in A.3.21.3)	-	CD.1A HD	
N_{oc} ^{Note1}	dBm/30 kHz	-111	-121
$\hat{E}_s/N_{oc}$ ^{Note3}	dB	10	
$\hat{E}_s/I_{ot}$ ^{Note2,3}	dB	10	
$\hat{E}_s/N_{oc}$ ^{Note4}	dB	0	20
$\hat{E}_s/I_{ot}$ ^{Note2,4}	dB	0	20
PSSCH-RSRP1 ^{Note 2,3}	dBm/30k Hz	-101	-111
PSSCH -RSRP2 ^{Note 2,4}	dBm/30k Hz	-111	-101
SL-RSSI1 ^{Note 2,3}	dBm/3.6 MHz	-79.79	-89.79
SL-RSSI2 ^{Note 2,4}	dBm/3.6 MHz	-87.20	-80.17
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	
Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: E_s/I_{ot} , PSSCH-RSRP and SL-RSSI levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3: For UE 20 to 59, occupying subchannel #1/2			
Note 4: For UE 0 to 19 and 60 to 99, occupying subchannel #0/3/4			
Note 5: The UE is only required to be tested in one of the supported test configurations.			

A.9.1.4.4.2 Test Requirements

The test time T1 and T2 should be long enough. The rate of PSSCH transmissions on the resources on subchannel #1 or #2 shall be less than 10% during T1. The rate of PSSCH transmissions on the resources on subchannel #1 or #2 shall be more than 90% during T2.

A.9.1.4.5 Test for V2X UE Autonomous Resource Selection/Reselection with Contiguous Sensing

A.9.1.4.5.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to autonomous resource selection / reselection for V2X UE in mode 2 performing contiguous sensing configured with M=31 defined in clause 12.5. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

The test parameters are given in Table A.9.1.4.5.1-1 and A. 9.1.4.5.1-2 below. There are 50 active V2X sidelink UEs (UE0~UE49) in this test. Both the UE under test and active V2X sidelink UEs select GNSS as synchronization reference source. The test system can emulate and send the GNSS signal to the test UE and active V2X sidelink UEs. The test parameters for GNSS signals are defined in B.4.1. The test system shall emulate the active V2X sidelink UEs to transmit PSCCH/PSSCH every 5ms. Starting from the beginning of whole test, the test equipment shall send a message with a SL-SCH MAC PDU every 5ms as specified in Clause 6.1.6 in TS 38.321[7] to schedule an aperiodic transmission and ensure that the UE under test needs continuously transmit PSCCH/PSSCH every 5ms.

The test consists of two duration T1 and T2. During T1, the signal from Test Equipment are configured such that

- the measured PSSCH-RSRP for 20 active V2X sidelink UEs (UE10~UE29) is above the measurement threshold, and the resource occupied by the 20 active V2X sidelink UEs is expected to be excluded in the resource selection procedure and,
- the measured PSSCH-RSRP for other 30 active V2X sidelink UEs(UE0~UE9, UE30~UE49) is low the measurement threshold, and the resource occupied by the 30 active V2X sidelink UEs is expected to be included in the resource selection procedure.

During T2, the signal from Test Equipment are configured such that

- the measured PSSCH-RSRP for the 20 active V2X sidelink UEs(UE10~UE29) is below the measurement threshold, and the resource occupied by the 20 active V2X sidelink UEs is expected to be included in the resource selection procedure and,
- the measured PSSCH-RSRP for other 30 active V2X sidelink UEs(UE0~UE9, UE30~UE49) is above the measurement threshold, and the resource occupied by the 30 active V2X sidelink UEs is expected to be excluded in the resource selection procedure.

Table A.9.1.4.5.1-1: Test Parameters for V2X UE Autonomous Resource Selection/Reselection Tests with Contiguous Sensing

Parameter		Unit	Value	Comment
NR RF Channel Number			1	TDD carrier in Band n47 or n38
Channel Bandwidth (BW _{channel}) ^{Note 2}		MHz	20 (N _{RB,C} = 50) or 40 (N _{RB,C} = 100)	
SCS		kHz	30	
V2X sidelink communication pre-configuration			As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool			1111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
sl-NumSubchannel-r16 included in SL-ResourcePool			5	Indicates the number of sub-channels for TX resource pool
sl-SubchannelSize-r16 included in SL-ResourcePool			10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
Number of Active Sidelink UEs			50	Active Sidelink UE i = 0, ..., 49
SL-ThresPSSCH-RSRP			12	Corresponding -106 dBm as defined in Section 6.3.5 in TS38.331[2]
Active Sidelink UEs (UE i = 0, ..., 49)	V2X sidelink Communication preconfiguration		As specified in Table A.3.21.2-1 And A.3.21.2-3	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		{1} ^{Note1}	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool

	sl-StartRB-Subchannel-r16 included in SL-ResourcePool		$\text{floor}(i/10) \times 10$	Indicates the lowest RB index of the subchannel with the lowest index. UE 0~9 start RB=0; UE 10~19 start RB=10; UE 20~29 start RB=20; UE 30~39 start RB=30; UE 40~49 start RB=40;
	sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
Timing offset among Active Sidelink UEs		μs	CP/2	Synchronous
Note 1: $\{1_i\}$ is a sequence of nine 0's with one 1 in $(\text{mod}(i,10)+1)$ 'th position.				
Note 2: The UE is only required to be tested in one of the supported test configurations.				

Table A.9.1.4.5.1-2: Active Sidelink UE Specific Test Parameters for V2X UE Autonomous Resource Selection/Reselection Tests with Contiguous Sensing

Parameter	Unit	Active Sidelink UE i (i = 0, ..., 49)	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth (BW_{channel}) ^{Note 5}	MHz	20 ($N_{RB,c} = 50$) or 40 ($N_{RB,c} = 100$)	
SCS	kHz	30	
PSCCH RMC (defined in A.3.21.3)	-	CC.1A HD	
PSSCH RMC (defined in A.3.21.3)	-	CD.1A HD	
N_{oc} ^{Note1}	dBm/30 kHz	-111	-121
$\hat{E}_s / N_{oc}$ ^{Note3}	dB	10	
$\hat{E}_s / I_{ot}$ ^{Note2,3}	dB	10	
$\hat{E}_s / N_{oc}$ ^{Note4}	dB	0	20
$\hat{E}_s / I_{ot}$ ^{Note2,4}	dB	0	20
PSSCH-RSRP1 ^{Note 2,3}	dBm/30 kHz	-101	-111
PSSCH -RSRP2 ^{Note 2,4}	dBm/30 kHz	-111	-101
SL-RSSI1 ^{Note 2,3}	dBm/3.6 MHz	-79.79	-89.79
SL-RSSI2 ^{Note 2,4}	dBm/3.6 MHz	-87.20	-80.17
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	

Note 1:	Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	Es/Iot, PSSCH-RSRP and SL-RSSI levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	For UE 10 to 29, occupying subchannel #1/2
Note 4:	For UE 0 to 9 and 30 to 49, occupying subchannel #0/3/4
Note 5:	The UE is only required to be tested in one of the supported test configurations.

A.9.1.4.5.2 Test Requirements

The test time T1 and T2 should be long enough. The rate of PSSCH transmissions on the resources on subchannel #1 or #2 shall be less than 10% during T1. The rate of PSSCH transmissions on the resources on subchannel #1 or #2 shall be more than 90% during T2.

A.9.1.4.6 Test for V2X UE Autonomous Resource Selection/Reselection in SL-DRX

A.9.1.4.6.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to autonomous resource selection / reselection for V2X UE in mode 2 defined in clause 12.5. For this test, the UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

The test parameters are given in Table A.9.1.4.6.1-1 and A. 9.1.4.6.1-2 below. There are 50 active V2X sidelink UEs (UE0~UE49) and another V2X sidelink UE as the receiver for the UE under test in this test. The UE under test, the receiver UE and active V2X sidelink UEs select GNSS as synchronization reference source. The test system can emulate and send the GNSS signal to the test UE, the receiver V2X sidelink UE and active V2X sidelink UEs. The test parameters for GNSS signals are defined in B.4.1. The test system shall emulate the active V2X sidelink UEs to transmit PSCCH/PSSCH every 5ms. At the beginning of whole test, the test equipment shall send one message with a SL-SCH MAC PDU as specified in Clause 6.1.6 in TS 38.321[7] and ensure that the UE under test needs continuously transmit PSCCH/PSSCH to the receiver SL UE.

The receiver UE runs one DRx cycle with 40ms cycle length and 10ms on time, 0ms inactivity timer, and 10ms offset. The UE under test and the 50 active UEs are in non-DRx mode.

The test consists of two duration T1 and T2. During T1, the signals from Test Equipment are configured such that

- the measured PSSCH-RSRP for 20 active V2X sidelink UEs(UE10~UE29) is above the measurement threshold, and the resource occupied by the 20 active V2X sidelink UEs is expected to be excluded in the resource selection procedure and,
- the measured PSSCH-RSRP for other 30 active V2X sidelink UEs(UE0~UE9, UE30~UE49) is low the measurement threshold, and the resource occupied by the 30 active V2X sidelink UEs is expected to be included in the resource selection procedure.

During T2, the signals from Test Equipment are configured such that

- the measured PSSCH-RSRP for the 20 active V2X sidelink UEs(UE20~UE29) is below the measurement threshold, and the resource occupied by the 20 active V2X sidelink UEs is expected to be included in the resource selection procedure and,
- the measured PSSCH-RSRP for other 30 active V2X sidelink UEs(UE0~UE9, UE30~UE49) is above the measurement threshold, and the resource occupied by the 30 active V2X sidelink UEs is expected to be excluded in the resource selection procedure.

Table A.9.1.4.6.1-1: Test Parameters for V2X UE Autonomous Resource Selection/Reselection Tests in SL-DRX

Parameter		Unit	Value	Comment
NR RF Channel Number			1	TDD carrier in Band n47 or n38
Channel Bandwidth (BW _{channel}) ^{Note 2}		MHz	20 (N _{RB,C} = 50) or 40 (N _{RB,C} = 100)	
SCS		kHz	30	
V2X sidelink communication pre-configuration			As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool			1111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
sl-NumSubchannel-r16 included in SL-ResourcePool			5	Indicates the number of sub-channels for TX resource pool
sl-SubchannelSize-r16 included in SL-ResourcePool			10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
Number of Active Sidelink UEs			50	Active Sidelink UE i = 0, ..., 49
SL-ThresPSSCH-RSRP			12	Corresponding -106 dBm as defined in Section 6.3.5 in TS38.331[2]
Active Sidelink UEs (UE i = 0, ..., 49)	V2X sidelink Communication preconfiguration		As specified in Table A.3.21.2-1 And A.3.21.2-3	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		{1} ^{Note1}	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	Indicates the number of sub-channels for TX resource pool
	sl-StartRB-Subchannel-r16 included in SL-ResourcePool		floor(i/10)x10	Indicates the lowest RB index of the subchannel with the lowest index. UE 0~9 start RB=0; UE 10~19 start RB=10; UE 20~29 start RB=20; UE 30~39 start RB=30; UE 40~49 start RB=40;
	sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
	sl-ResourceReservePeriod2-r16	ms	5	
Timing offset among Active Sidelink UEs		μs	CP/2	Synchronous

Note 1: $\{1_i\}$ is a sequence of nine 0's with one 1 in $(\text{mod}(i,10)+1)$ 'th position.
 Note 2: The UE is only required to be tested in one of the supported test configurations.

Table A.9.1.4.6.1-2: Active Sidelink UE Specific Test Parameters for V2X UE Autonomous Resource Selection/Reselection Tests in SL-DRX

Parameter	Unit	Active Sidelink UE i (i = 0, .., 49)	
		T1	T2
NR RF Channel Number	-	1	
Channel Bandwidth (BW _{channel}) ^{Note 5}	MHz	20 (N _{RB,C} = 50) or 40 (N _{RB,C} = 100)	
SCS	kHz	30	
PSCCH RMC (defined in A.3.21.3)	-	CC.1A HD	
PSSCH RMC (defined in A.3.21.3)	-	CD.1A HD	
N _{OC} ^{Note1}	dBm/30 kHz	-111	-121
$\hat{E}_s/N_{OC}$ ^{Note3}	dB	10	
$\hat{E}_s/I_{ot}$ ^{Note2,3}	dB	10	
$\hat{E}_s/N_{oc}$ ^{Note4}	dB	0	20
$\hat{E}_s/I_{ot}$ ^{Note2,4}	dB	0	20
PSSCH-RSRP1 ^{Note 2,3}	dBm/30k Hz	-101	-111
PSSCH -RSRP2 ^{Note 2,4}	dBm/30k Hz	-111	-101
SL-RSSI1 ^{Note 2,3}	dBm/3.6 MHz	-79.79	-89.79
SL-RSSI2 ^{Note 2,4}	dBm/3.6 MHz	-87.20	-80.17
Antenna Configuration	-	1x2	
Propagation Condition	-	AWGN	
Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 2: Es/Iot, PSSCH-RSRP and SL-RSSI levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3: For UE 10 to 29, occupying subchannel #1/2			
Note 4: For UE 0 to 9 and 30 to 49, occupying subchannel #0/3/4			
Note 5: The UE is only required to be tested in one of the supported test configurations.			

A.9.1.4.6.2 Test Requirements

The test time T1 and T2 should be long enough. The rate of PSSCH transmissions on the resources on subchannel #1 or #2 shall be less than 10% during T1. The rate of PSSCH transmissions on the resources on subchannel #1 or #2 shall be more than 90% during T2. The PSSCH transmission should happen only in the receiver SL UE SL-DRX active time.

A.9.1.5 Test for Congestion Control Measurement

A.9.1.5.1 Test Purpose and Environment

The purpose of this test is to verify the congestion control measurement requirements in section 12.6. For UE supporting NR Uu and sidelink operation, this test will also verify that V2X UE makes correct reporting of an event.

The test parameters are given in Table A.9.1.5.1-1, Table A.9.1.5.1-2, A.9.1.5.1-3 and A.9.1.5.1-4 below. There are 4 active V2X sidelink UEs in this test. The test system shall emulate the active sidelink UE to transmit PSCCH/PSSCH every 50ms. Additionally, For UE supporting NR Uu and sidelink operation, there is an active Cell (Cell 1) in this test. For UE only supporting NR sidelink, There are no active cell and GNSS is reliable during the whole test. The test system can emulate and send the GNSS signal to the test UE. The test parameters for GNSS signals are defined in B.4.1.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During T1, all of active V2X sidelink UEs are configured to transmit PSCCH/PSSCH with lower transmission power every 50ms. During T2, all of active V2X sidelink UEs are configured to transmit PSCCH/PSSCH with higher transmission power every 50ms.

For UE supporting NR Uu and sidelink operation, the UE under test and all active sidelink UEs select PCell as synchronization source. In the measurement control information it is indicated to the V2X UE that event-triggered reporting with Event C1 is used.

For UE only supporting NR sidelink, the UE under test and all active sidelink UEs select GNSS as synchronization source. The UE is triggered by the test loop function or the upper layers to transmit for V2X Sidelink Communication.

For UE supporting NR Uu and sidelink operation, Supported test configurations for FR1 NR cell are shown in Table A.9.1.5.1.1-1.

Table A.9.1.5.1.1-1: Supported Test Configurations for FR1 NR cell (only for UE supporting both NR Uu and sidelink operation)

Configuration	Description
1	NR Uu: FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR Uu: TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR Uu: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.9.1.5.1-2: General test parameters for Congestion Control Measurement Test for V2X UE

Parameter	Unit	Value	Comment
NR RF Channel Number		1	HD carrier in Band n47 or n38
Channel Bandwidth (BW_{channel}) ^{Note 2}	MHz	20 ($N_{\text{RB,C}} = 50$) or 40 ($N_{\text{RB,C}} = 100$)	
SCS	kHz	30	
V2X sidelink communication configuration		As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
sl-TimeResource-r16 included in SL-ResourcePool		111111111111111111 111111111111111111 111111111111111111 111111111111111111 111111111111111111	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
sl-NumSubchannel-r16 included in SL-ResourcePool		1	ENUMERATED {n1}
sl-SubchannelSize included in SL-ResourcePool		10	ENUMERATED {n10}

sl-StartRB-Subchannel-r16			0	
<i>threshS-RSSI-CBR</i>			19	Corresponding -74dBm as defined in Section 6.3.8 in TS38.331[2]
Active Cell ^{Note 3}			Cell 1	
Number of Active Sidelink UEs every 50ms			4	Active Sidelink UE <i>i</i> , where <i>i</i> = 0, 1, 2, 3
Active Sidelink UEs (<i>i</i> = 0,1,2,3)	V2X sidelink Communication configuration		As specified in Table A.3.21.2-1 and A.3.21.2-3	IE values unless specified otherwise in this test.
	sl-TimeResource-r16 included in SL-ResourcePool		{1} ^{Note1}	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
	sl-NumSubchannel-r16 included in SL-ResourcePool		1	
	sl-SubchannelSize included in SL-ResourcePool		10	
Timing offset between V2X UE and Active Sidelink UEs		μs	CP/2	Synchronous
c1-Threshold-r16 ^{Note 3}			2	Corresponding 0.02 as defined in Section 6.3.2 in TS38.331[2]
sl-CBR-RangeConfigList-r16 ^{Note 4}			[2 100]	Two ranges are defined by this list: 0 to 0.02 and 0.02 to 1
sl-CR-Limit-r16 ^{Note 4}			10000 and 10	Corresponding to the two CBR ranges: if CBR > 0.02, CR ≤ 0.001, otherwise CR > 0.001
sl-Thres-RSRP-r16 ^{Note 4}			12	Configure threshold <- 98.64dBm/30kHz to ensure not blocking transmission
Hysteresis			0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
T1		s	5	
T2		s	5	
Note 1: {1} is a sequence of ninety nine 0's with one 1 in <i>i</i> +1'th position. Note 2: The UE is only required to be tested in one of the channel bandwidths. Note 3: Only for UE supporting both Uu and sidelink operation. Note 4: Only for UE supporting sidelink operation but not supporting Uu.				

Table A.9.1.5.1-3: Active sidelink UE specific test parameters for Congestion Control Measurement Test for V2X UE

Parameter	Unit	Active Sidelink UE <i>i</i> (<i>i</i> = 0, 1, 2, 3)	
		T1	T2
NR RF Channel Number		1	
Channel Bandwidth (BW _{channel}) ^{Note 7}	MHz	20 (N _{RB,C} = 50) or 40 (N _{RB,C} = 100)	
PSCCH RMC (defined in A.3.21.3)		CC.1A HD	
PSSCH RMC (defined in A.3.21.3)		CD.1A HD	
N_{oc} ^{Note1}	dBm/30 kHz	-103	
$\hat{E}_s/N_{oc}$	dB	4.35	10.32
SL-RSSI1 ^{Note 2,3}	dBm/3.6 MHz	-76.5	-71.5

SL-RSSI2 ^{Note 2,4}	dBm/3.6 MHz	-82.21	-82.21
Io1 ^{Note 2,5}	dBm/18 MHz	-76.5	-71.5
	dBm/36 MHz	-76.5	-71.5
Io2 ^{Note 2,6}	dBm/18 MHz	-82.21	-82.21
	dBm/36 MHz	-82.21	-82.21
Propagation Condition	-	AWGN	
Note 1: Interference from other UEs and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: SL-RSSI1, SL-RSSI2, Io1 and Io2 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3: SL-RSSI1 is the SL-RSSI level measured on the slot# 0 - 3 with “SFN mod 5 = 0”.			
Note 4: SL-RSSI2 is the SL-RSSI level measured on the slot# 4-9 with “SFN mod 5 = 0” and the slot# 0-9 with “SFN mod 5 = 1,..., 4”.			
Note 5: Io1 is the Io level measured on the slot# 0 - 3 with “SFN mod 5 = 0”.			
Note 6: Io2 is the Io level measured on the slot# 4-9 with “SFN mod 5 = 0” and the slot# 0-9 with “SFN mod 5 = 1,..., 4”.			
Note 7: The UE is only required to be tested in one of the supported test configurations.			

Table A.9.1.5.1-4: Cell Test Parameters for Congestion Control Measurement Test for V2X UE (only for UE supporting both NR Uu and sidelink operation)

Parameter		Unit	Cell 1
RF Channel Number			2
Duplex Mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
Channel Bandwidth (BW _{channel})	Config 1,2	MHz	10: N _{RB,c} = 52
	Config 3		40: N _{RB,c} = 106
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1
Dedicated BWP Configuration			DLBWP.1.1 ULBWP.1.1
DRX Cycle			N/A
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration			SMTC.2
OCNG Patterns			OP.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			

N_{oc} ^{Note2}	Config 1,2,3	dBm/15 kHz	-98
N_{oc} ^{Note2}	Config 1,2	dBm/SCS	-98
	Config 3		-95
$\hat{E}_s/N_{oc}$		dB	3
SS-RSRP ^{Note3}	Config 1,2	dBm/SCS	-95
	Config 3		-92
I_0 ^{Note 3}	Config 1,2	dBm/9.36 MHz	-65.2
	Config 3	dBm/38.1 MHz	-59.2
Propagation Condition			AWGN
Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.9.1.5.2 Test Requirements

For UEs that support NR Uu and sidelink operation, the UEs shall not send event C1 triggered measurement reports during T1 and shall send event C1 triggered measurement reports during T2.

For UEs that support sidelink operation only, the UE channel occupancy ratio shall be larger than 0.001 during T1, and the UE channel occupancy ratio shall be smaller than 0.001 during T2.

The rate of correct events observed during repeated tests shall be at least 98%.

A.9.1.6 Test for Interruption

A.9.1.6.1 Test for Interruption to WAN due to V2X Sidelink Communication

A.9.1.6.1.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to interruptions due to V2X sidelink communication defined in clause 12.7.1 under the following additional conditions:

- The UE is out of coverage on the V2X sidelink carrier and is associated with a serving cell on a non-V2X sidelink carrier

This test is applicable for V2X sidelink communication capable UEs that support inter-band concurrent V2X sidelink operation.

For this test, the UE is triggered by the test loop function or the upper layers to monitor V2X sidelink communication.

The test parameters are given in Table A.9.1.6.1.1-1, Table A.9.1.6.1.1-2, Table A.9.1.6.1.1-3 and Table A.9.1.6.1.1-4. The test consists of one active cell (PCell) on the serving RF channel 1, and there are no active cells on RF channel 2. On RF channel 2, the test consists of 8 active Sidelink UEs in this test transmitting V2X sidelink communication. The UE under test and all active sidelink UEs select the active cell as synchronization source.

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively.

During T1, the UE is in RRC_IDLE and monitoring the V2X sidelink communication transmission from other active Sidelink UEs on the V2X sidelink communication resources.

During T2, the test system establishes a RRC connection with the UE. No PDSCH traffic is scheduled for UE, and the UE is expected to transmit *SidelinkUEInformationNR* indicating *sl-RxInterestedFreqList*. On reception of *SidelinkUEInformationNR*, the test system shall send RRC reconfiguration message to the UE and wait for the UE to respond with RRC reconfiguration complete message before transitioning to T3. If the UE does not transmit *SidelinkUEInformationNR* for up to 2 second, the test system shall transition to T3.

During T3, the UE is scheduled with PDSCH traffic on PCell downlink. The test system will count the missed ACK/NACKs during T3 to verify the allowed interruptions during V2X sidelink communication.

Table A.9.1.6.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	NR Uu: FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR Uu: TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR Uu: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.9.1.6.1.1-2: Test Parameters for Interruptions due to V2X Sidelink Communication

Parameter	Unit	Value	Comment
RF Channel Number	-	1, 2	RF channel 1 is non-V2X sidelink carrier RF channel 2 is V2X sidelink carrier
SCS	kHz	30	
Active cell	-	Cell 1	PCell on RF channel number 1
CP length of Cell 1	-	Normal	
T1	s	5.12	
T2	s	Up to receiving RRC reconfiguration setup complete from the UE, or up to 2 second if UE does not transmit <i>SidelinkUEInformationNR</i> during this period.	
T3	s	10	

Table A.9.1.6.1.1-3: Sidelink Communication Configuration for Interruptions due to V2X Sidelink Communication

Parameter		Unit	Value	Comment
RF Channel Number		-	2	HD carrier in Band n47 or n38
Channel Bandwidth (BW _{channel}) ^{Note 1}		MHz	20 (N _{RB,C} = 50) or 40 (N _{RB,C} = 100)	
V2X sidelink Communication configuration		-	As specified in section A.3.21.2	IE values unless specified otherwise in this test.
Number of Active Sidelink UEs		-	8	Active Sidelink UE i = 0, ..., 7
Active Sidelink UEs (UE i = 0, ..., 7)	V2X sidelink Communication configuration	-	As specified in section A.3.21.2	IE values unless specified otherwise in this test.
	PSCCH Reference Measurement Channel	-	CC.1A HD	As specified in Table A.3.21.3-1
	PSSCH Reference Measurement Channel	-	CD.1A HD	As specified in Table A.3.21.3-2
	sl-NumSubchannel-r16 included in SL-ResourcePool	-	1	Indicates the number of sub-channels for TX resource pool

	sl-StartRB-Subchannel-r16 included in SL-ResourcePool	-	i	Indicates the lowest RB index of the subchannel with the lowest index for active Sidelink UE i = 0, ..., 7.
	PSBCH-RSRP	dBm/30kHz	-95	
Note 1: The UE is only required to be tested in one of the supported test configurations.				

Table A.9.1.6.1.1-4: Cell specific test parameters for interruptions due to V2X sidelink communication

Parameter		Unit	Cell 1		
			T1	T2	T3
RF Channel Number			1		
UE RRC state			IDLE	CONNECTED	
Duplex Mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not Applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
Channel Bandwidth (BW_{channel})	Config 1,2	MHz	10: $N_{RB,C} = 52$		
	Config 3		40: $N_{RB,C} = 106$		
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1		
Dedicated BWP Configuration			DLBWP.1.1 ULBWP.1.1		
DRX Cycle			N/A		
PDSCH Reference measurement channel	Config 1		N/A	None	SR.1.1 FDD
	Config 2		N/A	None	SR.1.1 TDD
	Config 3		N/A	None	SR.2.1 TDD
CORESET Reference Channel	Config 1		CR.1.1 FDD		
	Config 2		CR.1.1 TDD		
	Config 3		CR.2.1 TDD		
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD		
	Config 2		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		
SSB configuration	Config 1,2		SSB.1 FR1		
	Config 3		SSB.2 FR1		
SMT C Configuration			SMT C.2		
OCNG Patterns			OP.1		
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} ^{Note2}	Config 1,2,3	dBm/15 kHz	-98		
N_{oc} ^{Note2}	Config 1,2	dBm/SCS	-98		
	Config 3		-95		
$\hat{E}_s / N_{oc}$		dB	3		
SS-RSRP ^{Note3}	Config 1,2	dBm/SCS	-95		
	Config 3		-92		
I_0 ^{Note 3}	Config 1,2	dBm/9.36 MHz	-65.3		

	Config 3	dBm/38.1 MHz	-59.2
Antenna Configuration			1x2
Propagation Condition			AWGN
Note 1:	OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		

A.9.1.6.1.2 Test Requirements

The UE shall be continuously scheduled on PCell on RF channel 1 during T3. During T3, the interruption on PCell shall not be more than the values specified in clause 12.7.1..

A.9.1.6.2 Test for interruption to WAN at transitions between active and non-active during SL-DRX in asynchronous case

A.9.1.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that when V2X sidelink is in SL-DRX and NR PCell is in non-DRX, NR PCell interruptions due to transitions of V2X sidelink UE from active to non-active and from non-active to active do not exceed the limits in terms of missing ACK/NACK. This test will verify the missing ACK/NACK rate on NR PCell in clause 12.7.4 under the following additional conditions:

- The UE is out of coverage on the V2X sidelink carrier and is associated with a serving cell on a non-V2X sidelink carrier.
- The UE is in sidelink resource allocation mode 1.

This test is applicable for V2X sidelink communication capable UEs that support inter-band concurrent V2X sidelink operation.

For this test, the UE is triggered by the test loop function or the upper layers to monitor V2X sidelink communication.

The test parameters are given in Table A.9.1.6.2.1-1, Table A.9.1.6.2.1-2, and Table A.9.1.6.2.1-3. The test consists of one active cell (PCell) on the serving RF channel 1, and there are no active cells on RF channel 2. The UE under test selects GNSS as the synchronization source.

The test consists of one time period, with duration of T1. During T1, NR PCell is continuously scheduled in DL while V2X sidelink is not scheduled and has SL-DRX configured. Prior to start of T1 the SL-DRX inactivity timer for the V2X sidelink has already expired. PDCCH indicating a new transmission on PCell shall be sent continuously during the entire time duration to ensure UE would not enter DRX state on PCell.

Table A.9.1.6.2.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	NR Uu: FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR Uu: TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR Uu: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note:	The UE is only required to pass in one of the supported test configurations in FR1

Table A.9.1.6.2.1-2: Test Parameters for Interruptions at transitions between active and non-active during SL-DRX in asynchronous case

Parameter	Unit	Value	Comment
RF Channel Number	-	1, 2	RF channel 1 is non-V2X sidelink carrier RF channel 2 is V2X sidelink carrier
SCS	kHz	30	
Active cell	-	Cell 1	PCell on RF channel number 1
CP length of Cell 1	-	Normal	
SL-DRX		SL-DRX.3	SL-DRX related parameters are defined in Table A.3.21.4.2-1
T1	s	10	

Table A.9.1.6.2.1-3: Cell specific test parameters for interruptions at transitions between active and non-active during SL-DRX in asynchronous case

Parameter		Unit	Cell 1
			T1
RF Channel Number			1
UE RRC state			CONNECTED
Duplex Mode	Config 1		FDD
	Config 2,3		TDD
TDD configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
Channel Bandwidth (BW _{channel})	Config 1,2	MHz	10: N _{RB,c} = 52
	Config 3		40: N _{RB,c} = 106
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1
Dedicated BWP Configuration			DLBWP.1.1 ULBWP.1.1
DRX Cycle			N/A
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
CORESET Reference Channel	Config 1		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB configuration	Config 1,2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTc Configuration			SMTc.2
OCNG Patterns			OP.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N _{oc} ^{Note2}	Config 1,2,3	dBm/15 kHz	-98
N _{oc} ^{Note2}	Config 1,2	dBm/SC	-98
	Config 3	S	-95

$\hat{E}_s / N_{oc}$		dB	3
SS-RSRP ^{Note3}	Config 1,2	dBm/SC	-95
	Config 3	S	-92
I_0 ^{Note 3}	Config 1,2	dBm/9.36 MHz	-65.3
	Config 3	dBm/38.1 MHz	-59.2
Antenna Configuration			1x2
Propagation Condition			AWGN
Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.9.1.6.2.2 Test Requirements

The UE shall be continuously scheduled on PCell on RF channel 1 during the entire length of T1. UE shall not be scheduled in V2X sidelink during T1. During the time duration T1 the UE shall transmit at least 99.375% of ACK/NACK on NR PCell.

Interruption on NR PCell shall not exceed X as defined in Table A.9.1.6.2.2-1.

Table A.9.1.6.2.2-1: Interruption length X at transition between active and non-active during SL-DRX

μ	NR Slot length (ms)	Interruption length X
		Async
0	1	2
1	0.5	2
2	0.25	3

The rate of correct events observed during repeated tests shall be at least 90%.

A.9.1.6.3 Test for Interruption at NR Sidelink Discovery Configuration

A.9.1.6.3.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to interruptions due to NR sidelink discovery configuration defined in clause 12.7.8 under the following additional conditions:

- The UE is out of coverage on the NR sidelink carrier and is associated with a serving cell on a NR non-sidelink carrier

This test is applicable for NR sidelink discovery capable UEs that support inter-band concurrent sidelink operation.

For this test, the UE is triggered by the test loop function or the upper layers to monitor NR sidelink discovery.

The test parameters are given in Table A.9.1.6.3.1-1, Table A.9.1.6.3.1-2, Table A.9.1.6.3.1-3 and Table A.9.1.6.3.1-4. The test consists of one active cell (PCell) on the serving RF channel 1, and there are no active cells on RF channel 2. On RF channel 2, the test consists of 8 active Sidelink UEs in this test transmitting sidelink discovery. The UE under test and all active sidelink UEs select the active cell as synchronization source.

The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively.

During T1, the UE is in RRC_IDLE and monitoring NR sidelink discovery announcements from other active Sidelink UEs on NR sidelink discovery resources.

During T2, the test system establishes a RRC connection with the UE. No PDSCH traffic is scheduled for UE, and the UE is expected to transmit *SidelinkUEInformationNR* indicating *sl-RxInterestedFreqListDisc*. On reception of *SidelinkUEInformationNR*, the test system shall send RRC reconfiguration message to the UE and wait for the UE to respond with RRC reconfiguration complete message before transitioning to T3. If the UE does not transmit *SidelinkUEInformationNR* for up to 2 second, the test system shall transition to T3.

During T3, the UE is scheduled with PDSCH traffic on PCell downlink. The test system will count the missed ACK/NACKs during T3 to verify the allowed interruptions during NR sidelink discovery.

Table A.9.1.6.3.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	NR Uu: FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR Uu: TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR Uu: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.9.1.6.3.1-2: Test Parameters for Interruptions at NR Sidelink Discovery Configuration

Parameter	Unit	Value	Comment
RF Channel Number	-	1, 2	RF channel 1 is NR non-sidelink carrier RF channel 2 is NR sidelink carrier
SCS	kHz	30	
Active cell	-	Cell 1	PCell on RF channel number 1
CP length of Cell 1	-	Normal	
T1	s	5.12	
T2	s	Up to receiving RRC reconfiguration setup complete from the UE, or up to 2 second if UE does not transmit <i>SidelinkUEInformationNR</i> during this period.	
T3	s	5	

Table A.9.1.6.3.1-3: Sidelink Discovery Configuration for Interruptions at NR Sidelink Discovery Configuration

Parameter		Unit	Value	Comment
RF Channel Number		-	2	HD carrier in Band n47 or n38
Channel Bandwidth (BW _{channel}) ^{Note 1}		MHz	20 (N _{RB,c} = 50) or 40 (N _{RB,c} = 100)	
NR sidelink discovery configuration		-	As specified in section A.3.X1.2	IE values unless specified otherwise in this test.
Number of Active Sidelink UEs		-	8	Active Sidelink UE i = 0, ..., 7
Active Sidelink UEs (UE	NR sidelink discovery configuration	-	As specified in section A.3.X1.2	IE values unless specified otherwise in this test.
	PSCCH Reference Measurement Channel	-	CC.1A HD	As specified in Table A.3.21.3-1

i = 0, ..., 7)	PSSCH Reference Measurement Channel	-	CD.1A HD	As specified in Table A.3.21.3-2
	sl-NumSubchannel-r16 included in SL-ResourcePool	-	1	Indicates the number of sub-channels for TX resource pool
	sl-StartRB-Subchannel-r16 included in SL-ResourcePool	-	i	Indicates the lowest RB index of the subchannel with the lowest index for active Sidelink UE i = 0, ..., 7.
	PSBCH-RSRP	dBm/30kHz	-95	
Note 1: The UE is only required to be tested in one of the supported test configurations.				

Table A.9.1.6.3.1-4: Cell specific test parameters for interruptions at NR Sidelink Discovery Configuration

Parameter		Unit	Cell 1		
			T1	T2	T3
RF Channel Number			1		
UE RRC state			IDLE	CONNECTED	
Duplex Mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not Applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
Channel Bandwidth (BW _{channel})	Config 1,2	MHz	10: N _{RB,c} = 52		
	Config 3		40: N _{RB,c} = 106		
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1		
Dedicated BWP Configuration			DLBWP.1.1 ULBWP.1.1		
DRX Cycle			N/A		
PDSCH Reference measurement channel	Config 1		N/A	None	SR.1.1 FDD
	Config 2		N/A	None	SR.1.1 TDD
	Config 3		N/A	None	SR.2.1 TDD
CORESET Reference Channel	Config 1		CR.1.1 FDD		
	Config 2		CR.1.1 TDD		
	Config 3		CR.2.1 TDD		
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD		
	Config 2		CCR.1.1 TDD		
	Config 3		CCR.2.1 TDD		
SSB configuration	Config 1,2		SSB.1 FR1		
	Config 3		SSB.2 FR1		
SMTc Configuration			SMTc.2		
OCNG Patterns			OP.1		
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N _{oc} ^{Note2}	Config 1,2,3	dBm/15 kHz	-98		
N _{oc} ^{Note2}	Config 1,2	dBm/SCS	-98		
	Config 3		-95		

$\hat{E}_s / N_{oc}$		dB	3
SS-RSRP ^{Note 3}	Config 1,2	dBm/SCS	-95
	Config 3		-92
I _o ^{Note 3}	Config 1,2	dBm/9.36 MHz	-65.3
	Config 3	dBm/38.1 MHz	-59.2
Antenna Configuration			1x2
Propagation Condition			AWGN
Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.9.1.6.3.2 Test Requirements

The UE shall be continuously scheduled on PCell on RF channel 1 during T3. During T3, the interruption on PCell shall not be more than the values specified in clause 12.7.8.

A.9.1.7 Selection / Reselection of relay UE

A.9.1.7.1 Test Purpose and Environment

The purpose of this test is to verify the requirements related to selection / reselection of relay UE defined in clauses 12.10. In the test the UE under test is configured with PCell and is configured with resource pools for NR sidelink discovery message as required for remote UE operation.

This test is applicable to UEs capable of NR sidelink communication and sidelink discovery, and further support the optional feature of sidelink remote UE operation.

The test parameters are given in Table A.9.1.7.1.1-1, Table A.9.1.7.1-2, Table A.9.1.7.1-3, Table A.9.1.7.1-4, and Table A.9.1.7.1-5 below. The test consists of one active serving cell (cell 1), one remote UE and two active Sidelink relay UEs (Sidelink Relay UE 1, Sidelink Relay UE 2). The relay UEs are configured in mode 2 to be transmitting relay discovery messages every discovery period, which is determined by resource reservation period indicated by *sl-ResourceReservePeriodList*.

The test system shall ensure that the remote UE under test has transmitted *SidelinkUEInformationNR* message and has been configured with the sidelink discovery resource pool and sidelink communication resource pool respectively for relay operation prior to the start of the test.

The tests consist of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively.

During T1, RSRP of cell 1 is kept higher than *threshHighRemote* (within *sl-remoteUE-Config*), and the remote UE is not required to perform relay UE selection.

During T2, RSRP of cell 1 is configured to be lower than *threshHighRemote*. The UE is expected to start looking for relay UE. The test system shall ensure that the UE under test has been configured the resource pool prior to end of T2 duration. During T2, the SD-RSRP of Sidelink Relay UE 1 and Sidelink Relay UE 2 is configured to be lower than the detection threshold and no relay UE will be available for the remote UE under test.

During T3, the SD-RSRP of Sidelink Relay UE 1 is raised above the threshold *sl-RSRP-Thresh* and the UE is expected to perform relay selection to Sidelink Relay UE 1. The test system can determine that the remote UE has selected a relay by monitoring the configured sidelink communication resource for the Prose direct link establishment request message to the relay UE.

During T4, the UE is expected to complete the sidelink connection establishment with the relay UE. Note that the RSRP of the serving cell (cell 1) and the SD-RSRP of sidelink relay UEs is kept unchanged during T3 and T4. The period T4 ends when Sidelink Relay UE1 sends the sidelink communication response message back to the remote UE.

During T5, SD-RSRP of Sidelink Relay UEs are modified such that the remote UE is expected to reselect to Sidelink Relay UE2.

Table A.9.1.7.1-1: Test parameters for selection / reselection of relay UE test for NR FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	HD carrier in Band n47 or n38
Channel Bandwidth (BW _{channel}) ^{Note 1}	MHz	20 (NRB _c = 50) or 40 (NRB _c = 100)	
SCS	kHz	30	
Active cell		Cell 1	Serving NR cell will broadcasting SIB12
Active Relay UEs		Relay UE 1, Relay UE 2	Transmitting relay discovery message
CP length of Cell 1		Normal	
T1	ms	100	
T2	s	Up to receiving RRC reconfiguration setup complete from the UE, or up to [1] sec if UE does not transmit <i>SidelinkUEInformationNR</i> during this period.	
T3	s	1	
T4	s	2	
T5	s	1	

Note 1: The UE is only required to be tested in one of the supported test configurations.

Table A.9.1.7.1-2: Sidelink discovery configuration for selection / reselection of relay UE test for NR FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	HD carrier in Band n47 or n38
Channel Bandwidth (BW _{channel}) ^{Note 1}	MHz	20 (NRB _c = 50) or 40 (NRB _c = 100)	
Resource pool configuration for sidelink discovery		As specified in Table A.3.21.2-2 ^{Note 2}	IE values unless specified otherwise in this test.
sl-TimeResource included in <i>sl-DiscTxPoolSelected-r17</i> and <i>sl-DiscRxPool-r17</i>		0000111100	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
sl-NumSubchannel included in <i>sl-DiscTxPoolSelected-r17</i> and <i>sl-DiscRxPool-r17</i>		2	Indicates the number of sub-channels for TX resource pool
sl-SubchannelSize included in <i>sl-DiscTxPoolSelected-r17</i> and <i>sl-DiscRxPool-r17</i>		10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
<i>sl-ResourceReservePeriodList</i>	s	0.04	Indicates the resource reservation period for discovery period
<i>threshHighRemote within sl-remoteUE-Config</i>		-91dBm	

<i>sl-RSRP-Thresh within sl-remoteUE-Config</i>		-91dBm	
Note 1: The UE is only required to be tested in one of the supported test configurations.			
Note 2: This test is according to the principle defined in section A.3.21.			

Table A.9.1.7.1-3: Sidelink Communication configuration for selection / reselection of relay UE test

Parameter		Unit	Value	Comment
RF Channel Number		-	1	HD carrier in Band n47 or n38
Channel Bandwidth (BW_{channel}) ^{Note 1}		MHz	20 ($N_{RB,c} = 50$) or 40 ($N_{RB,c} = 100$)	
Sidelink Communication configuration		-	As specified in section A.3.21.2	IE values unless specified otherwise in this test.
sl-TimeResource		-	0000000011	Indicates the bitmap of the TX and Rx resource pool, which is defined by repeating the bitmap within a SFN cycle (see TS 38.213[3])
Number of Active Sidelink Relay UEs		-	2	Active Sidelink UE $i = 0, 1$
Active Sidelink Relay UEs (UE $i = 0, 1$)	PSCCH Reference Measurement Channel	-	CC.1A HD	As specified in Table A.3.21.3-1
	PSSCH Reference Measurement Channel	-	CD.1A HD	As specified in Table A.3.21.3-2
	sl-NumSubchannel-r16 included in SL-ResourcePool	-	1	Indicates the number of sub-channels for TX resource pool
	sl-SubchannelSize-r16 included in SL-ResourcePool		10	Indicates the minimum granularity in frequency domain for the sensing for PSSCH resource selection in the unit of PRB
	sl-StartRB-Subchannel-r16 included in SL-ResourcePool	-	$\text{floor}(i) \times 10$	Indicates the lowest RB index of the subchannel with the lowest index for Sidelink Relay UE $i = 0$ starts RB=0; Sidelink Relay UE $i = 1$ starts RB=10.
	PSBCH-RSRP	dBm/30kHz	-95	
Note 1: The UE is only required to be tested in one of the supported test configurations.				

Table A.9.1.7.1-4: Sidelink Relay UE specific test parameters for selection / reselection of relay UE test for NR FR1

Parameter	Unit	Relay UE 1					Relay UE 2				
		T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
NR RF Channel Number		1 (HD carrier in Band n47 or n38)									
BW_{channel} ^{Note 4}	MHz	20 ($N_{RB,c} = 50$) or 40 ($N_{RB,c} = 100$)									
SCS	kHz	30									
Sidelink Discovery resource pool configuration		As specified in Table A.9.1.7.1-2									
Transmission frequency		Every discovery period (40ms)									
Resource allocation		Non-overlapping PRBs									

N_{oc} Note1	dBm/30 kHz	-97									
$\hat{E}_s / N_{oc}$	dB	-inf	-inf	10.5	10.5	-1.5	-inf	-inf	-inf	-inf	10.5
SD-RSRP / SL-RSRP Note2, Note 3	dBm/30 kHz	-inf	-inf	-86.5	-86.5	-98.5	-inf	-inf	-inf	-inf	-86.5
Antenna Configuration	-	1x2									
Propagation Condition		AWGN									
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.											
Note 2: SD-RSRP / SL-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.											
Note 3: PSCCH-DMRS Es/lot is set the same as PSSCH-DMRS Es/lot.											
Note 4: This test is according to the principle defined in section A.3.21.2.											

Table A.9.1.7.1-5: Cell specific test parameters for selection / reselection of relay UE test for NR FR1

Parameter		Unit	Cell1				
			T1	T2	T3	T4	T5
NR RF Channel Number			2				
Serving/Non-serving			Serving				
Duplex Mode	Config 1		FDD				
	Config 2,3		TDD				
TDD configuration	Config 1		Not Applicable				
	Config 2		TDDConf.1.1				
	Config 3		TDDConf.2.1				
Channel Bandwidth (BW _{channel})	Config 1,2		10: N _{RB,c} = 52				
	Config 3		40: N _{RB,c} = 106				
Initial BWP Configuration			DLBWP.0.1 ULBWP.0.1				
Dedicated BWP Configuration			DLBWP.1.1 ULBWP.1.1				
DRX Cycle			N/A				
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD				
	Config 2		SR.1.1 TDD				
	Config 3		SR.2.1 TDD				
CORESET Reference Channel	Config 1		CR.1.1 FDD				
	Config 2		CR.1.1 TDD				
	Config 3		CR.2.1 TDD				
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD				
	Config 2		CCR.1.1 TDD				
	Config 3		CCR.2.1 TDD				
SSB configuration	Config 1,2		SSB.1 FR1				
	Config 3		SSB.2 FR1				
SMTc Configuration			SMTc.2				
OCNG Patterns			OP.1				
EPRE ratio of PSS to SSS		dB	0				
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
Correlation Matrix and Antenna Configuration							
drx-Configuration			N/A				

PDCCH/PCFICH/PHICH Reference measurement channel ^{Note1}			R.11 FDD				
OCNG Pattern defined in A.3.2.1			OP.16 FDD				
N_{oc} ^{Note2}	Config 1,2,3	dBm/15 kHz	-97				
N_{oc} ^{Note2}	Config 1,2,	dBm/SCS	-97				
	Config 3		-94				
$\hat{E}_s/N_{oc}$		dB	10.5	1.5	1.5	1.5	1.5
RSRP ^{Note3}		dBm/15 kHz	-86.5	-95.5	-95.5	-95.5	-95.5
Propagation condition			AWGN				
Correlation Matrix and Antenna Configuration			1x2 Low				
Note 1: OCNG shall be used such that cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.9.1.7.2 Test Requirements

Sidelink relay UE selection delay is defined as the time from the beginning of time period T3 to the moment when the UE selects the Sidelink Relay UE1 and transmits the PC5-SP direct communication setup message using Sidelink Communications.

The test system shall verify that the sidelink relay UE selection delay is less than 680ms.

NOTE: The sidelink relay UE selection delay can be expressed as ($T_{\text{evaluate, ProSe_Relay_intra}} + 40\text{ms}$).

Sidelink relay UE reselection time is defined as the time from the beginning of time period T5 to the moment when the UE reselects to Sidelink relay UE2 and transmits the direct communication setup message using Sidelink Communications.

The test system shall verify that the sidelink relay UE reselection delay is less than 840ms.

NOTE: The sidelink relay UE reselection delay can be expressed as ($T_{\text{measure, ProSe_Relay_Intra}} + T_{\text{evaluate, ProSe_Relay_intra}} + 40\text{ms}$).

A.10 EN-DC Tests with NR PSCell under CCA and Other NR Cells in FR1

Editor's note: Test cases for EN-DC with NR PSCell under CCA and SCell under CCA are also included here.

A.10.1 RRC_CONNECTED state mobility

A.10.1.1 RRC connection mobility control

A.10.1.1.1 Random Access

A.10.1.1.1.1 4-step RA type contention-based random access for NR PSCell with CCA

A.10.1.1.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in clause 6.2.2A.2 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7A.2.1 and Cell 2 configured as PSCell in FR1. Cell 1 is on a licensed band and cell 2 is subjected to CCA. Supported test parameters are shown in Table A.10.1.1.1.1.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.10.1.1.1.1.1-2.

Table A.10.1.1.1.1-1: Supported test configurations for contention based random access test in FR1 for PSCell with CCA

Config	Description
1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.10.1.1.1.1-2: General test parameters for contention based random access test in FR1 for PSCell with CCA

Parameter			Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1,2		SSB.1 CCA	As defined in A.3.10A
	Note 5, 6	Config 1,2		SSB.2 CCA	As defined in A.3.10A
DBT Window Configuration		Config 1,2		DBT.1	As specified in A.3.28.1
DL CCA model		Config 1,2		As specified in A.3.26.2.1	
UL CCA model		Config 1,2		As specified in A.3.26.2.2	
Duplex Mode for Cell 2		Config 1,2		TDD	
TDD Configuration		Config 1,2		TDDConf.1.1 CCA	
OCNG Pattern ^{Note 1}				OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters ^{Note 3}		Config 1,2		SR.1.1 CCA	As defined in A.3.1A.1.
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB		
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		

EPRE ratio of PDCCH_DMRS to SSS			dB	0	
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
I ₀ Note 2		Config 1,2	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{C_{MAX}, f, c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 1 under CCA	As defined in A.3.8A.2.
DL CCA probability		Note 4, 6		0.9375	
P _{CCA_DL}		Note 5, 6		0.75/0.75	
L _{CCA_DL} Note 7				4	
W _{CCA_DL} Note 8				Inf	
UL CCA probability		Note 4, 6		0.87	
P _{CCA_UL}		Note 5, 6		0.75	
L _{CCA_UL} Note 7				5	
W _{CCA_UL} Note 8				Inf	
Semi-static channel access config period Note 4, 6			ms	2	
Propagation Condition			-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.					
Note 2: SS-RSRP, Es/Iot and I0 levels have been derived from other parameters for information purpose. They are not settable parameters.					
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.					
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.					
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds PCCA_DL1 and the second value corresponds to the PCCA_DL2.					
Note 6: For UE supporting both semi-static and dynamic cannal access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.					
Note 7: LCCA_DL and LCCA_UL are chosen such that preambleTransMax > 5 + LCCA_DL + LCCA_UL.					
Note 8: A window WCCA_DL=WCCA_UL=Inf is used to indicate that LCCA_DL and LCCA_UL are considered during the entire duration of a test run.					

A.10.1.1.1.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.10.1.1.1.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2A.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*, if the UL CCA is successful.

The three requirements below are relevant for all cases of PRACH transmissions described within the whole clause A.10.1.1.1.1.2:

- The System Simulator shall implement the UL CCA model of A.3.26.2 for the RACH occasions where PRACH transmissions are expected. The System Simulator shall monitor the RACH occasions to detect if the UE is transmitting PRACH preambles. If a PRACH transmission is detected on a RACH occasion that is expected to have UL CCA failure, the test is considered as failed.
- In case of CCA DL failure, the test equipment should verify that the UE does not transmit PRACH for semi-static channel access mode; for dynamic channel access mode it is assumed that RACH occasions are always scheduled within a UE-initiated COT.
- In case of UL CCA failure, The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2A.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble. In case of CCA DL failure, the test equipment should delay the transmission of Random Access Response.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 transmission is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2A.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles. In case of CCA DL failure, the test equipment should delay the transmission of Random Access Response.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2A.2.1.4, the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.10.1.1.1.2.5 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2A.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.10.1.1.1.2 4-step RA type non-contention based random access for NR PSCell with CCA

A.10.1.1.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in clause 6.2.2A.2 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7A.2.1 and Cell 2 configured as PSCell in FR1. Cell 1 is on a licensed band and cell 2 is subjected to CCA. Supported test parameters are shown in Table A.10.1.1.1.2.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.10.1.1.1.2.1-2.

Table A.10.1.1.1.2.1-1: Supported test configurations for non-contention based random access test in FR1 for PSCell with CCA

Config	Description
1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table A.10.1.1.1.2.1-2: General test parameters for non-contention based random access test in FR1 for PSCell with CCA

Parameter			Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1,2		SSB.1 CCA	As defined in A.3.10A
	Note 5, 6	Config 1,2		SSB.2 CCA	As defined in A.3.10A
DBT Window Configuration		Config 1,2		DBT.1	As specified in A.3.28.1
DL CCA model		Config 1,2		As specified in A.3.26.2.1	
UL CCA model		Config 1,2		As specified in A.3.26.2.2	
Duplex Mode for Cell 2		Config 1,2		TDD	
TDD Configuration		Config 1,2		TDDConf.1.1 CCA	
OCNG Pattern ^{Note 1}				OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters ^{Note 3}		Config 1,2		SR.1.1 CCA	As defined in A.3.1A.1.
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/SCS	-115	
I ₀ ^{Note 2}		Config 1,2	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX, f, c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 2 under CCA	As defined in A.3.8A.2.
DL CCA probability P _{CCA_DL}	Note 4, 6			0.9375	
	Note 5, 6			0.75/0.75	

LCCA_DL ^{Note 7}			4	
WCCA_DL ^{Note 8}			Inf	
UL CCA probability	Note 4, 6		0.87	
PCCA_UL	Note 5, 6		0.75	
LCCA_UL ^{Note 7}			5	
WCCA_UL ^{Note 8}			Inf	
Semi-static channel access config period ^{Note 4, 6}		ms	2	
Propagation Condition		-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters. Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required. Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds PCCA_DL1 and the second value corresponds to the PCCA_DL2. Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration. Note 7: LCCA_DL and LCCA_UL are chosen such that $\text{preambleTransMax} > 5 + \text{LCCA_DL} + \text{LCCA_UL}$. Note 8: A window $W_{\text{CCA_DL}} = W_{\text{CCA_UL}} = \text{Inf}$ is used to indicate that LCCA_DL and LCCA_UL are considered during the entire duration of a test run.				

A.10.1.1.1.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.10.1.1.1.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2A.2.2.1 for SSB-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

The three requirements below are relevant for all cases of PRACH transmissions described within the whole clause A.10.1.1.1.2.2:

- The System Simulator shall implement the UL CCA model of A.3.26.2 for the RACH occasions where PRACH transmissions are expected. The System Simulator shall monitor the RACH occasions to detect if the UE is transmitting PRACH preambles. If a PRACH transmission is detected on a RACH occasion that is expected to have UL CCA failure, the test is considered as failed.
- In case of CCA DL failure, the test equipment should verify that the UE does not transmit PRACH for semi-static channel access mode; for dynamic channel access mode it is assumed that RACH occasions are always scheduled within a UE-initiated COT.
- In case of UL CCA failure, The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.2.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2A.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble. In case of CCA DL failure, the test equipment should delay the transmission of Random Access Response.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.2.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2A.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles. In case of CCA DL failure, the test equipment should delay the transmission of Random Access Response.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.3 2-step RA type contention-based random access for NR PSCell with CCA

A.10.1.1.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the behaviour of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in clause 6.2.2A.3 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7A.2.1 and Cell 2 configured as PSCell in FR1. Cell 1 is on a licensed band and cell 2 is subjected to CCA. Supported test parameters are shown in Table A.10.1.1.1.3.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.10.1.1.1.3.1-2.

Table A.10.1.1.1.3.1-1: Supported test configurations for 2-step RA type contention based random access test in FR1 for PSCell with CCA

Config	Description
1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table A.10.1.1.1.3.1-2: General test parameters for 2-step RA type contention based random access test in FR1 for PSCell with CCA

Parameter		Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1,2	SSB.1 CCA	As defined in A.3.10A
	Note 5, 6	Config 1,2	SSB.2 CCA	As defined in A.3.10A
DBT Window Configuration		Config 1,2	DBT.1	As specified in A.3.28.1
DL CCA model		Config 1,2	As specified in A.3.26.2.1	
UL CCA model		Config 1,2	As specified in A.3.26.2.2	
Duplex Mode for Cell 2		Config 1,2	TDD	
TDD Configuration		Config 3,4	TDDConf.1.1 CCA	
OCNG Pattern ^{Note 1}			OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters ^{Note 3}		Config 1,2	SR.1.1 CCA	As defined in A.3.1A.1.
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	Power of SSB with index 0 is set to be above configured <i>msgA-RSRP-ThresholdSSB</i>
	N_{oc}	Config 1,2	dBm/15kHz	
	$\hat{E}_s / N_{oc}$		dB	
	SS-RSRP ^{Note 2}		dBm/SCS	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	Power of SSB with index 1 is set to be below
			-17	

					configured <i>msgA-RSRP-ThresholdSSB</i>
	N_{oc}	Config 1,2	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP ^{Note 2}		dBm/ SCS	-115	
Io		Config 1,2	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{C_{MAX, f, c}}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 1 under CCA	As defined in A.3.20A.2.
<i>msgA-RSRP-ThresholdSSB</i>			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
DL CCA probability	Note 4, 6			0.9375	
P_{CCA_DL}	Note 5, 6			0.75/0.75	
L_{CCA_DL} ^{Note 7}				4	
W_{CCA_DL} ^{Note 8}				Inf	
UL CCA probability	Note 4, 6			0.87	
P_{CCA_UL}	Note 5, 6			0.75	
L_{CCA_UL} ^{Note 7}				5	
W_{CCA_UL} ^{Note 8}				Inf	
Semi-static channel access config period ^{Note 4, 6}			ms	2	
Propagation Condition			-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.					
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.					
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.					
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.					
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2} .					
Note 6: For UE supporting both semi-static and dynamic cannel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.					
Note 7: L_{CCA_DL} and L_{CCA_UL} are chosen such that $preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}$.					
Note 8: A window $W_{CCA_DL}=W_{CCA_UL}=Inf$ is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.					

A.10.1.1.1.3.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.10.1.1.1.3.2.1 MsgA Transmission

To test the UE behaviour specified in Clause 6.2.2A.3.1.1 the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB*, if the UL CCA is successful.

below are relevant for all cases of MsgA transmissions described within the clause A.10.1.1.1.3.2:

- The System Simulator shall implement the UL CCA model for the MsgA occasions (i.e. both MsgA PRACH and MsgA PUSCH occasions) where MsgA transmissions are expected. The System Simulator

shall monitor the MsgA occasions to detect if the UE is transmitting MsgA. If a MsgA transmission is detected on MsgA occasions that are expected to have UL CCA failure, the test is considered as failed.

- In case of CCA DL failure, the test equipment should verify that the UE does not transmit MsgA for semi-static channel access mode; for dynamic channel access mode it is assumed that MsgA occasions are always scheduled within a UE-initiated COT.
- The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated PRACH transmission power in case of UL CCA failure.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated PRACH transmission power in case of UL CCA failure. In addition, the power applied to all MsgA transmission shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.3.2.2 MsgB Reception

To test the UE behaviour specified in Clause 6.2.2A.3.1.2 the System Simulator shall transmit a MsgB with fallbackRAR containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble. In case of CCA DL failure, the test equipment should delay the transmission of MsgB.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble .

In addition, the power applied to all MsgA transmission shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.3.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2A.3.1.3 the System Simulator shall transmit a MsgB with fallbackRAR containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles. In case of CCA DL failure, the test equipment should delay the transmission of MsgB.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmission shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.4 2-step RA type non-contention based random access for NR PSCell with CCA

A.10.1.1.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in clause 6.2.2A.3 and clause 7.1.2 in an AWGN model.

For this test two cells are used, with the configuration of Cell 1 (E-UTRA PCell) specified in clause A.3.7.2.1 and Cell 2 configured as PSCell in FR1. Cell 1 is on a licensed band and cell 2 is subjected to CCA. Supported test parameters are shown in Table A.10.1.1.1.4.1-1. UE capable of EN-DC with PSCell in FR1 needs to be tested by using the parameters in Table A.10.1.1.1.4.1-2.

Table A.10.1.1.1.4.1-1: Supported test configurations for non-contention based random access test for 2-step RA type in FR1 for PSCell with CCA

Config	Description
1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table A.10.1.1.1.4.1-2: General test parameters for non-contention based random access test for 2-step RA type in FR1 for PSCell with CCA

Parameter			Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1,2		SSB.1 CCA	As defined in A.3.10A
	Note 5, 6	Config 1,2		SSB.2 CCA	As defined in A.3.10A
DBT Window Configuration		Config 1,2		DBT.1	As specified in A.3.28.1
DL CCA model		Config 1,2		As specified in A.3.26.2.1	
UL CCA model		Config 1,2		As specified in A.3.26.2.2	
Duplex Mode for Cell 2		Config 1,2		TDD	
TDD Configuration		Config 1,2		TDDConf.1.1 CCA	
OCNG Pattern ^{Note 1}				OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters ^{Note 3}		Config 1,2		SR.1.1 CCA	As defined in A.3.1A.1.
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB		
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		

EPRE ratio of PDCCH_DMRS to SSS			dB	0	
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured <i>msgA-RSRP-ThresholdSSB</i>
	N_{oc}	Config 1,2	dBm/15kHz z	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured <i>msgA-RSRP-ThresholdSSB</i>
	N_{oc}	Config 1,2	dBm/15kHz z	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
Io ^{Note 2}		Config 1,2	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power (P _{CMAX,f,c})			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 2 under CCA	As defined in A.3.20A.2.
<i>msgA-RSRP-ThresholdSSB</i>			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
DL CCA probability P _{CCA_DL}		Note 4, 6		0.9375	
		Note 5, 6		0.75/0.75	
L _{CCA_DL} ^{Note 7}				4	
W _{CCA_DL} ^{Note 8}				Inf	
UL CCA probability P _{CCA_UL}		Note 4, 6		0.87	
		Note 5, 6		0.75	
L _{CCA_UL} ^{Note 7}				5	
W _{CCA_UL} ^{Note 8}				Inf	
Semi-static channel access config period ^{Note 4, 6}			ms	2	
Propagation Condition			-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.					
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.					
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.					
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.					
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P _{CCA_DL1} and the second value corresponds to the P _{CCA_DL2} .					
Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.					
Note 7: L _{CCA_DL} and L _{CCA_UL} are chosen such that preambleTransMax > 5 + L _{CCA_DL} + L _{CCA_UL} .					

Note 8: A window $W_{CCA_DL}=W_{CCA_UL}=\text{Inf}$ is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

A.10.1.1.1.4.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.10.1.1.1.4.2.1 MsgA Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2A.3.2.1 for MsgA transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

The three requirements below are relevant for all cases of MsgA transmissions described within the clause A.10.1.1.1.4.2:

- The System Simulator shall implement the UL CCA model for the MsgA occasions (i.e. both MsgA PRACH and MsgA PUSCH occasions) where MsgA transmissions are expected. The System Simulator shall monitor the MsgA occasions to detect if the UE is transmitting MsgA. If a MsgA transmission is detected on MsgA occasions that are expected to have UL CCA failure, the test is considered as failed.
- In case of CCA DL failure, the test equipment should verify that the UE does not transmit MsgA for semi-static channel access mode; for dynamic channel access mode it is assumed that MsgA occasions are always scheduled within a UE-initiated COT.
- The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated PRACH transmission power in case of UL CCA failure.

In addition, the power applied to all MsgA transmission shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.4.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2A.3.2.2 the System Simulator shall transmit a MsgB containing a successRAR MAC subPDU corresponding to the transmitted Random Access Preamble after 5 MsgA transmissions have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble. In case of CCA DL failure, the test equipment should delay the transmission of MsgB.

The UE may stop monitoring for MsgB if the MsgB contains a successRAR MAC subPDU corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated MsgA transmission power if Random Access Responses Reception has not been considered as successful.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2A.3. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.1.1.4.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2A.3.2.3 the System Simulator shall transmit a MsgB corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles. In case of CCA DL failure, the test equipment should delay the transmission of MsgB.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA*.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2A.3. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.10.1.2 Handover with PSCell from EN-DC to EN-DC with known target PSCell using CCA

A.10.1.2.1 Test Purpose and Environment

This test is to verify the requirement for E-UTRA handover with NR PSCell change, where NR PSCell is on carrier with CCA. The requirements for EN-DC HO with PSCell change on CCA are specified in clause 5.9 in E-UTRA RRM specification [15] for the case when the target PSCell is on carrier with CCA. Supported test configurations are shown in table A.10.1.2.1-1.

Table A.10.1.2.1-1 gives general test configurations for Handover with PSCell from EN-DC to EN-DC, Table A.10.1.2.1-2 provides general test parameters for Handover from E-UTRA to E-UTRA cell in EN-DC to EN-DC, Table A.10.1.2.1-3 provides E-UTRAN cell specific test parameters for Handover with PSCell from EN-DC to EN-DC, Table A.10.1.2.1-4 provides general test parameters for PSCell change from FR1 carrier under CCA to FR1 carrier under CCA, Table A.10.1.2.1-5 provides cell specific test parameters for PSCell change from FR1 carrier under CCA to FR1 carrier under CCA.

In the test there are four cells: Cell1 and Cell2 are PCell and target PCell on E-UTRA carrier, Cell3 and Cell4 are PSCell and target PSCell on NR CCA carrier. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. Before the test starts the UE is connected to Cell1 (E-UTRA PCell) and Cell3 (NR PSCell) with EN-DC mode.

At the start of time duration T1, the UE do not have any information of cell 2 and cell 4. AT the end of T1, UE is configured with neighbour cell measurements on the Cell 3 and Cell 4 for Event A3 conditional measurement report.

During T2, UE acquires the timing information of Cell3 and Cell 4 and performs L3-RSRP measurements on the configured neighbour cells. UE sends measurement report to the Cell1 to indicate the event triggering condition A3 is satisfied for the configured for neighbour cells. By end of T2, E-UTRA PCell (Cell1) shall send a RRC message implying handover with PSCell change.

The start of T3 is defined as the end of the last TTI containing the RRC message implying handover with PSCell. UE shall complete PRACH transmission to PCell and PSCell by end of T3.

Table A.10.1.2.1-1: General test configurations for Handover with PSCell from EN-DC to EN-DC with CCA on NR Cell

Config	Description
1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on the UE capability	

Table A.10.1.2.1-2: General test parameters for Handover from E-UTRA to E-UTRA cell in EN-DC to EN-DC

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	One is E-UTRA RF channel and one is NR RF channel
Initial conditions	Active PCell		Cell1	On E-UTRA RF channel number 1.
	E-UTRA Neighbouring cell		Cell2	On E-UTRA RF channel number 1.
Final conditions	Active PCell		Cell2	
CP length			Normal	Applicable to Cell1, Cell2, Cell3 and Cell4.
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Continuous monitoring of primary cell
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between same RAT cells		µs	3	Synchronous cells
T1		s	5	
T2		s	≤5	
T3		s	1	Tinterrupt is defined in clause 6.1B.1.2

Table A.10.1.2.1-3: E-UTRAN cell specific test parameters for Handover with PSCell from EN-DC to EN-DC

Parameter	Unit	Cell1			Cell2		
		T1	T2	T3	T1	T2	T3
Duplex mode		FDD or TDD			FDD or TDD		
TDD special subframe configuration ^{Note1}		6			6		
TDD uplink-downlink configuration ^{Note1}		1			1		
BW _{channel}		5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100			5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100		

PDSCH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD			5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD			5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns defined in A.3.2.1 (FDD) and in A.3.2.2(TDD) ^{Note2}		5 MHz: OP.20 FDD 10MHz: OP.1 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	OP.18 FDD OP.2 FDD OP.14 FDD OP.10 TDD OP.2 TDD OP.8 TDD	5MHz: OP.18 FDD 10MHz: OP.2 FDD 20MHz: OP.14 FDD 5MHz: OP.10 TDD 10MHz: OP.2 TDD 20MHz: OP.8 TDD	OP.20 FDD OP.1 FDD OP.17 FDD OP.9 TDD OP.1 TDD OP.7 TDD		
PRACH configuration		-			4, As specified in table 5.7.1-2 in TS 36.211		
PBCH_RA	dB	0			0		
PBCH_RB	dB						
PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB						
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note3}	dB						
OCNG_RB ^{Note3}	dB						
N _{oc} ^{Note4}	dBm/15 kHz	-98					
$\hat{E}_s/N_{oc}$	dB	8	8	8	-infinite	11	11
$\hat{E}_s/I_{ot}$	dB	8	-3.3	-3.3	-infinite	2.36	2.36
RSRP ^{Note5}	dBm/15 kHz	-90	-90	-90	-infinite	-87	-87
SCH_RP ^{Note5}	dBm/15 kHz	-90	-90	-90	-infinite	-87	-87
I ₀ ^{Note5}	dBm/Ch BW	-61.58	-57.23+10log(N _{RB,C} /50)		N/A	-57.23+10log(N _{RB,C} /50)	
Propagation Condition		AWGN					
Antenna Configuration		1x2					

Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211.
Note 2:	DL RMCs and OCN patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 respectively.
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5:	E_s/I_{ot} , RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.10.1.2.1-4: General test parameters for PSCell change from FR1 carrier under CCA to FR1 carrier under CCA

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 3	On the carrier under CCA
	Neighbouring cell		Cell 4	On the carrier under CCA
Final condition	Active cell		Cell 4	On the carrier under CCA
DL CCA model	Dynamic channel access ^{Note 1, 3}		As specified in clause A.3.20.2.1	
	Semi-static channel access ^{Note 2, 3}			
UL CCA model	Dynamic channel access ^{Note 1, 3}		As specified in clause A.3.20.2.2	
	Semi-static channel access ^{Note 2,3}			
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μ s	Synchronous cells
T304		ms	500	
L _{CCA_DL}			5	
W _{CCA_DL}		ms	T304	
L _{CCA_UL}			5	
W _{CCA_UL}		ms	T304	
T1		s	5	
T2		s	≤ 5	
T3		s	$\geq T_{interrupt}$	$T_{interrupt}$ is defined in clause 6.1B.1.2
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.10.1.2.1-5: Cell specific test parameters for PSCell change from FR1 carrier under CCA to FR1 carrier under CCA

Parameter		Unit	Cell 3			Cell 4		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
P _{CCA_DL} for dynamic channel access ^{Note 4,6}		-	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75			P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75		
P _{CCA_DL} for semi-static channel access ^{Note 5,6}		-	P _{CCA_DL} =0.9375			P _{CCA_DL} =0.9375		
P _{CCA_UL} for dynamic channel access ^{Note 4,6}		-	0.75			0.75		
P _{CCA_UL} for semi-static channel access ^{Note 5,6}		-	0.87			0.87		
TDD configuration	Config 1, 2		TDDConf.1.1 CCA					

BW _{channel}		Config 1, 2		40: N _{RB,c} = 106					
BWP BW		Config 1, 2		40: N _{RB,c} = 106					
DRX Cycle			ms	Not Applicable					
PDSCH Reference		Config 1, 2		SR.1.1 CCA					
CORESET Reference Channel		Config 1, 2		CR.1.1 CCA					
Dedicated CORESET RMC configuration		Config 1, 2		CCR.1.1 CCA					
TRS configuration		Config 1, 2		TRS.1.1 TDD					
OCNG Patterns				OP.1					
SMTc Configuration				SMTc.1					
DBT window configuration		Config 1, 2		DBT.1					
SSB configuration for semi-static channel access ^{Note 4, 6}		Config 1, 2		SSB.1 CCA					
SSB configuration for dynamic channel access ^{Note 5, 6}		Config 1, 2		SSB.2 CCA					
ssb-PositionQCL		Config 1, 2		[1]					
PDSCH/PDCCH subcarrier spacing		Config 1, 2	kHz	30 kHz					
PUCCH/PUSCH subcarrier spacing		Config 1, 2	kHz	30 kHz					
PRACH configuration				FR1 PRACH configuration 1 under CCA					
BWP configuration		Initial DL BWP		DLBWP.0.1					
		Dedicated DL BWP		DLBWP.1.1					
		Initial UL BWP		ULBWP.0.1					
		Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS			dB	0					
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N _{oc} ^{Note2}			dBm/15kHz _z	-98					
N _{oc} ^{Note2}	Config 1, 2		dBm/SCS	-95					
Ê _s /I _{ot}			dB	8	-3.3	-3.3	-	2.36	2.36
Ê _s /N _{oc}			dB	8	8	8	-	11	11
SSB_RP	Config 1, 2		dBm/SCS	-87	-87	-87	-	-84	-84
I _o ^{Note3}	Config 1, 2		dBm/38.16MHz	-55.31	-50.96	-50.96	-55.31	-50.96	-50.96
Propagation condition			-	AWGN			AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.									
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.									
Note 3: I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.									

Note 4:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 6:	For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.10.1.2.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 60 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover requirements for handover with PSCell for EN-DC is defined in clause 5.9 in [15] as:

$$D_{\text{HOwithPSCell_PCell}} = T_{\text{RRC_delay}} + T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}}$$

Where:

$T_{\text{RRC_delay}} = 20$ ms for ‘RRC connection reconfiguration (NR SCG establishment/ /modification/release)’.

$T_{\text{search}} = 0$ ms for known cell.

$T_{\text{IU}} = 15$ ms in the test configuration.

$T_{\text{processing}} = 25$ ms for source Cell and target Cell are in the same FR.

This gives a total of 60ms for handover delay.

The UE shall transmit the PRACH preamble to Cell 4 less than $D_{\text{HOwithPSCell_PSCell}}$ from the beginning of time period T3.

NOTE: The PSCell change delay for handover with PSCell for EN-DC is defined in clause 5.8 in [15] as:

$$D_{\text{HOwithPSCell_PSCell}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search}} + T_{\Delta} + T_{\text{IU_PSCell}} + 2 \text{ ms}$$

Where:

$T_{\text{RRC_delay}} = 20$ ms for ‘RRC connection reconfiguration (NR SCG establishment/ /modification/release)’.

$T_{\text{processing}} = 25$ ms for source Cell and target Cell are in the same FR.

$T_{\text{search}} = 0$ ms for known cell.

$T_{\Delta} = (1 + L_2) * 20$ ms.

$T_{\text{IU}} = (1 + L_3) * 10 + 10$ ms

L_2 is the number of SMTC occasions not available at the UE during the time tracking period where $L_2 \leq L_{\text{CCA_DL}}$, and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure, where $L_3 \leq L_{\text{CCA_UL}}$. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33]. The interruption time considering the potential extensions caused by L_1 , L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2]. Test equipment should make sure that $L_{\text{CCA_DL}}$ and $L_{\text{CCA_UL}}$ are not exceeded during a test by monitoring the number of CCA failures and preventing additional CCA failures from happening after $L_{\text{CCA_DL}}$ or $L_{\text{CCA_UL}}$ is reached.

The rate of correct PSCell addition observed during repeated tests shall be at least 90%.

A.10.2 Timing

A.10.2.1 UE transmit timing

A.10.2.1.1 UE Transmit Timing Test with PSCell under DL CCA

A.10.2.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeB when PSCell is subject to DL CCA and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2. Supported test configurations are shown in Table 10.2.1.1.1-1.

Table A.10.2.1.1.1-1: Supported test configurations for UE transmit timing test

Config	Description
1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations.	

The test consists of E-UTRA PCell and NR PSCell, which is subject to DL CCA. The configuration for E-UTRA is given in A.3.7.2.1. Table A.10.2.1.1.1-2 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.10.2.1.1.1-3.

Table A.10.2.1.1.1-2: Cell Specific Test Parameters for UE Transmit Timing test

Parameter		Unit	Config	Test1	Test2
SSB ARFCN			1,2	Freq1	Freq1
TDD configuration			1,2	TDDConf.1.1 CCA	
BW _{channel}		MHz	1,2	40: N _{RB,C} = 106	
Initial BWP Configuration			1,2	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration			1,2	DLBWP.1.1 ULBWP.1.1	
DRX Cycle		ms	1,2	N/A	DRX.8 ^{Note5}
DL CCA model			1,2	As specified in clause A.3.26.2.1	
UL CCA model			1,2	As specified in clause A.3.26.2.2	
PDSCH Reference			1,2	SR.1.1 CCA	
CORESET Reference			1,2	CR.1.1 CCA	
OCNG Patterns			1,2	OCNG pattern 1	
SSB configuration	Semi- static channel acces		1,2	SSB.1 CCA	
	Dynamic channel acces		1,2	SSB.2 CCA	
SMTC configuration			1,2	SMTC.1 FR1	
TRS configuration			1,2	TRS.1.2 TDD	
DL CCA probability for semi-static channel access (P _{CCA,DL})			1,2	0.9375	0.9375
DL CCA model probability for dynamic static channel access (P _{CCA,DL,1})			1,2	0.75	0.75
DL CCA model probability for dynamic static channel access (P _{CCA,DL,2})			1,2	0.75	0.75
UL CCA probability (P _{CCA,UL})			1,2	1	1
EPRE ratio of PSS to SSS					
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					

EPRE ratio of PDCCH DMRS to SSS	dB	1,2	0	0
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc}^{Note2}	dBm/30 kHz	1,2	-95	-95
$\hat{E}_s / I_{ot}$		1,2	3	3
$\hat{E}_s / N_{oc}$		1,2	3	3
SS-RSRP ^{Note3}	dBm/30 kHz	1,2	-92	-92
I_o^{Note3}	dBm/38.1MHz	1,2	-59.2	-59.2
Propagation condition		1,2	AWGN	
SRS Config		1,2	SRSCConf.1 ^{Note6}	SRSCConf.2 ^{Note6}
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: DRX related parameters are given in Table A.3.3.8-1 Note 6: SRS configs are given in Table A.10.2.1.1.1-3. Note 7: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.26.2. Note 8: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.				

Table A.10.2.1.1.1-3: SRS Configuration for UE transmit timing

	Field	SRSCConf.1	SRSCConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	14 for test configuration 1,2 25 for test configuration 3	25	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	

	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl640, 0	Offset to align with DRx periodicity
	sequenceId	0	0	Any 10 bit number

A.10.2.1.1.2 Test requirements

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test

- 1) Set up E-UTRA PCell according to parameters given in Table A.3.7.2.1-1 and setup NR PSCell according to parameters given in Table A.10.2.1.1.1-1.
- 2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.
 - a. The N_{TA} offset value (in T_c units) is 25600
 - b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1
- 3) The test system shall adjust the timing of the DL path by values given in Table A.10.2.1.1.2-1

Table A.10.2.1.1.2-1: Adjustment Value for DL Timing

SCS of SSB signals (kHz)	Adjustment Value	
	Test1	Test2
30	$+32 \times 64 T_c$	$+16 \times 64 T_c$

- 4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Clause 7.1.2 Table 7.1.2.1-1 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first detected path (in time) of DL SSB. Skip this step for test 2 with DRX configured.
- 5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

A.10.2.2 UE timing advance

A.10.2.2.1 UE Timing Advance Adjustment Accuracy with PSCell under DL CCA

A.10.2.2.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.10.2.2.1.2 Test Parameters

Supported test configurations are shown in table A.10.2.2.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.10.2.2.1.2-2, A.10.2.2.1.2-3 and A.10.2.2.1.2-4. The configuration of Cell 1 (LTE PCell) is specified in clause A.3.7.2.1.

In all test cases, two cells are used. Cell 1 is the PCell in the primary Timing Advance Group (pTAG) and cell 2 is the PSCell which is subject to DL CCA is in the secondary Timing Advance Group (sTAG). Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance

commands for sTAG are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.10.2.2.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured for PSCell in sTAG.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element for sTAG, as specified in clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance for sTAG used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements for sTAG, with Timing Advance Command value specified in table A.10.2.2.1.2-2. This value shall result in changes of the timing advance for sTAG used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in clause 7.3.2.1, the UE adjusts its uplink timing at slot $n+k$ for a timing advance command received in slot n . This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in clause 5.2 in TS 38.321, shall be configured so that it does not expire in the duration of the test.

Table A.10.2.2.1.2-1: Supported test configurations for timing advance test

Config	Description
1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations.	
Note 2: The UE supporting EN-DC only on NR band(s) with shared spectrum access is required to be tested	

Table A.10.2.2.1.2-2: General test parameters for timing advance test

Parameter	Unit	Value	Comment
RF channel number		Cell 1: 1 Cell 2: 2	1 for E-UTRAN PCcell 2 for NR PSCell
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 30 kHz SCS $N_{TA_new} = N_{TA_old} + 4096 \cdot T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.10.2.2.1.2-3: Cell specific test parameters for timing advance test

Parameter		Unit	Test1	
			T1	T2
TDD configuration	Config 1,2		TDDConf.1.1 CCA	
BW _{channel}	Config 1,2	MHz	40: $N_{RB,c} = 106$	
BWP BW	Config 1,2	MHz	40: $N_{RB,c} = 106$	

DRX Cycle		Config 1,2	ms	Not Applicable
DL CCA model		Config 1,2		As specified in clause A.3.26.2.1
UL CCA model		Config 1,2		As specified in clause A.3.26.2.2
PDSCH Reference		Config 1,2		SR.1.1 CCA
CORESET Reference		Config 1,2		CR.1.1 CCA
TRS configuration		Config 1,2		TRS.1.2 TDD
OCNG Patterns		Config 1,2		OCNG pattern 1
SSB Configuration	Semi-static channel access	Config 1,2		SSB.1 CCA
	Dynamic channel access	Config 1,2		SSB.2 CCA
SMTC configuration		Config 1,2		SMTC.1 FR1
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1,2		1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)		Config 1,2		1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		Config 1,2		1
UL CCA probability P_{CCA}		Config 1,2		1
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note2}	Config 1,2	dBm/30 kHz	-95	
	Config 3,6		-95	
$\hat{E}_s / I_{ot}$		dB	3	
$\hat{E}_s / N_{oc}$		dB	3	
I_o ^{Note3}	Config 1,2	dBm/38.16M Hz	-62.58	
Propagation condition			-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: Parameters P_{CCA_DL} , $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.26.2.				
Note 5: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.				

Table A.10.2.2.1.2-4: Sounding Reference Symbol Configuration for timing advance test

Field		Value	Comment
c-SRS	Config 1,2	24	Frequency hopping is disabled
b-SRS		0	
b-hop		0	
freqDomainPosition		0	Frequency domain position of SRS
freqDomainShift		0	
groupOrSequenceHopping		neither	No group or sequence hopping
SRS-PeriodicityAndOffset		sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS		ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage		Codebook	Codebook based UL transmission
startPosition		0	resourceMapping setting: SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols		n1	
repetitionFactor		n1	
combOffset-n2		0	transmissionComb setting
cyclicShift-n2		0	
nrofSRS-Ports		port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].			

A.10.2.2.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value for PSCell in sTAG to the transmission timing at the designated activation time i.e. $k+1$ slots after the reception of the timing advance command, where $k=5$.

The Timing Advance adjustment accuracy for PSCell in sTAG shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.10.3 Signalling characteristics

A.10.3.1 Radio link monitoring

A.10.3.1.1 Introduction

In the test cases specified in clause A.10.3.1, any uplink signal transmitted by the UE is used for detecting the in-/out-of-sync state of the UE. In terms of measurement, the uplink signal is verified based on the UE output power:

- UE output power higher than Transmit OFF power -50 dBm (as defined in TS 38.101-3 [20]) means uplink signal
- UE output power equal to or less than Transmit OFF power -50 dBm (as defined in TS 38.101-3 [20]) means no uplink signal.

For intra-band contiguous carrier aggregation, transmit OFF power is measured as the mean power per component carrier.

For UE with multiple transmit antennas, transmit OFF power is measured as the mean power at each transmit connector.

A.10.3.1.2 Radio link monitoring out-of-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode

A.10.3.1.2.1 Test purpose and environment

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR1 PSCell radio link monitoring requirements in clause 8.1A.

In the test, UE is configured to perform RLM based on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.10.3.1.2.1-1. The test parameters are given in Tables A.10.3.1.2.1-2, A.10.3.1.2.1-3, and A.10.3.1.2.1-4 below. There are two cells in the test: Cell 1 is the E-UTRAN PCell, and Cell 2 is the FR1 PSCell which operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

The test consists of three successive time periods, with time duration of T1, T2 and T3, respectively. Figure A.10.3.1.2.1-1 shows the variation of the downlink SNR in the active Cell 2 to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1 and Cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE transmits according to UL CCA model. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40 ms) in the test.

Table A.10.3.1.2.1-1: Supported test configurations.

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.3.1.2.1-2: General test parameters for PSCell out-of-sync testing in non-DRX mode.

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
DL CCA model			As specified in clause A.3.26.2.1
UL CCA model			As specified in clause A.3.26.2.2
Duplex mode	Config 1,2		TDD
BW _{channel}	Config 1,2	MHz	40: N _{RB,C} = 106
DL initial BWP configuration	Config 1,2		DLBWP.0.1
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1
UL initial BWP configuration	Config 1,2		ULBWP.0.1
UL dedicated BWP configuration	Config 1,2		ULBWP.1.1
TDD configuration	Config 1,2		TDDConf.1.1 CCA
CORESET Reference Channel	Config 1,2		CR.1.1 CCA
SSB configuration for semi-static	Config 1,2		SSB.1 CCA

channel access ^{Note 4, 6}			
SSB configuration for dynamic channel access ^{Note 5, 6}	Config 1,2		SSB.2 CCA
DBT window configuration	Config 1,2		DBT.1
PDSCH/PDCCH subcarrier spacing	Config 1,2		30 kHz
PRACH Configuration	Config 1,2		FR1 PRACH configuration 1 under CCA
SSB index assigned as RLM RS			0
OCNG parameters			[OP.1]
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1,2		TRS.1.2 TDD
T1		s	0.2
T2		s	1.04
T3		s	1.04
D1		s	1
NOTE 1: All configurations are assigned to the UE prior to the start of time period T1. NOTE 2: UE-specific PDCCH is not transmitted after T1 starts. NOTE 3: E-UTRAN is in non-DRX mode under test. Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.10.3.1.2.1-3: Cell-specific test parameters for PSCell out-of-sync testing in non-DRX mode.

Parameter	Unit	Test 1					
		T1	T2	T3			
Note 6,8		P _{CCA,DL} =0.9375					

DL CCA probability P _{CCA_DL}	Note 7,8		P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75					
UL CCA probability P _{CCA_UL}			1					
EPRE ratio of PDCCH DMRS to SSS		dB	4					
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB	0					
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR ^{Note 3,4} on RLM-RS	Config 1,2	dB	1	-7	-15			
SNR on other channels and signals	Config 1,2	dB	1					
N _{oc}	Config 1,2	dBm/ SCS	-95					
Propagation condition			TDL-C 300 ns 100 Hz					
NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during muted slots or during DBT windows.								
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.								
NOTE 3: SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT windows.								
NOTE 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3, respectively, in Figure A.10.3.1.2.1-1.								
NOTE 5: The SNR values are specified for testing a UE which supports 2 RX on at least one band. For testing of a UE which supports 4 RX on all bands, the SNR during T3 is A.3.6.								
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.								
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.								
NOTE 8: For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.								

Table A.10.3.1.2.1-4: Measurement gap configuration for PSCell out-of-sync testing in non-DRX mode.

Field	Test 1	
	Value	
<i>gapOffset</i>	0	
NOTE 1: E-UTRAN PCell and PSCell are SFN-synchronous and frame boundary aligned.		
NOTE 2: Ensure that RLM RS is partially overlapped with measurement gap.		

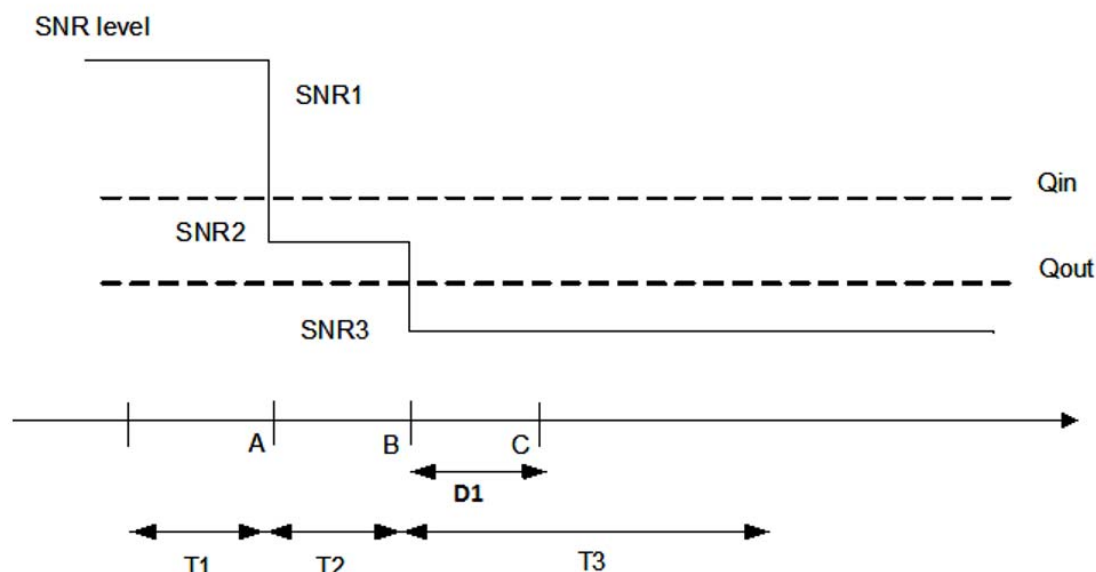


Figure A.10.3.1.2.1-1: SNR variation for out-of-sync testing.

A.10.3.1.2.2 Test requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

- During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.
- The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.10.3.1.3 Radio link monitoring in-sync test for PSCell configured with SSB-based RLM RS in non-DRX mode

A.10.3.1.3.1 Test purpose and environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PSCell. This test will partly verify the FR1 PSCell radio link monitoring requirements in clause 8.1A.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.10.3.1.3.1-1. The test parameters are given in Tables A.10.3.1.3.1-2, and A.10.3.1.3.1-3 below. There are two cells in the test: Cell 1 is the E-UTRAN PCell, and Cell 2 is the FR1 PSCell which operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.10.3.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE transmits according to UL CCA model.

Table A.10.3.1.3.1-1: Supported test configurations.

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.3.1.3.1-2: General test parameters for PSCell in-sync testing in non-DRX mode.

Parameter		Unit	Value
			Test 1
Active E-UTRA PCell			Cell 1
E-UTRA RF Channel Number			1
Active PSCell			Cell 2
RF Channel Number			2
DL CCA model			As specified in clause A.3.26.2.1
UL CCA model			As specified in clause A.3.26.2.2
Duplex mode	Config 1,2		TDD
BW _{channel}	Config 1,2	MHz	40: N _{RB,c} = 106
DL initial BWP configuration	Config 1,2		DLBWP.0.1
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1
UL initial BWP configuration	Config 1,2		ULBWP.0.1
UL dedicated BWP configuration	Config 1,2		ULBWP.1.1
TDD Configuration	Config 1,2		TDDConf.1.1 CCA
CORESET Reference Channel	Config 1,2		CR.1.1 CCA
SSB configuration for semi-static channel access ^{Note 3, 5}	Config 1,2		SSB.1 CCA
SSB configuration for dynamic channel access ^{Note 4,5}	Config 1,2		SSB.2 CCA
DBT window configuration	Config 1,2		DBT.1
PDSCH/PDCCH subcarrier spacing	Config 1,2		30 kHz
PRACH Configuration	Config 1,2		FR1 PRACH configuration 1 under CCA
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
	DCI format		1-0

In sync transmission parameters	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
	DCI format		1-0
Out of sync transmission parameters	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
	DCI format		1-0
DRX			OFF
Gap pattern ID			N/A
Layer 3 filtering			Enabled
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1,2		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.52
T4		s	0.2
T5		s	2.04
D1		s	2
NOTE 1: All configurations are assigned to the UE prior to the start of time period T1.			
NOTE 2: UE-specific PDCCH is not transmitted after T1 starts.			
NOTE 3: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.			
NOTE 4: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.			
NOTE 5: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.10.3.1.3.1-3: Cell-specific test parameters for PSCell in-sync testing in non-DRX mode.

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
DL CCA probability P_{CCA_DL}	Note 6,8		$P_{CCA_DL}=0.9375$				
	Note 7,8		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$				
UL CCA probability P_{CCA_UL}			1				
L_{CCA_DL}			7				
W_{CCA_DL}		ms	$T_{Evaluate_in_SSB,CCA}$ NOTE 9				
EPRE ratio of PDCCH DMRS to SSS		dB	4				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,2	dB	1	-7	-15	-4.5	1
SNR on other channels and signals	Config 1,2	dB	1				
N_{oc}	Config 1,2	dBm/SCS	-95				
Propagation condition			TDL-C 300ns 100Hz				
NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during muted slots or during DBT windows.							
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
NOTE 3: SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT windows.							
NOTE 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.10.3.1.2.1-1.							
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4 RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.							
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.							
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.							
NOTE 8: For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.							
NOTE 9: As defined in Table 8.1A.2.2-1.							

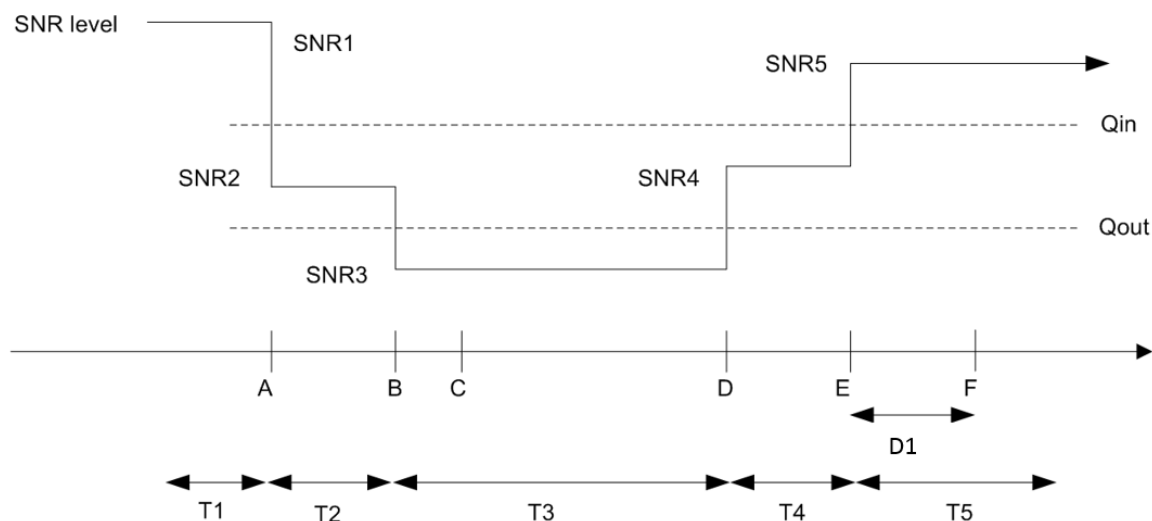


Figure A.10.3.1.2.1-1: SNR variation for in-sync testing.

A.10.3.1.3.2 Test requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.10.3.1.4 Void

A.10.3.1.4.1 Void

A.10.3.1.4.2 Void

A.10.3.1.5 Void

A.10.3.1.5.1 Void

A.10.3.1.5.2 Void

A.10.3.2 Void

A.10.3.3 SCell activation and deactivation delay

A.10.3.3.1 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 160 ms SCell measurement cycle

A.10.3.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for NR SCell, with NR PSCell and NR SCell both under CCA, are within the requirements stated in clause 8.3A, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 160 ms.

The supported test configurations are shown in Table A.10.3.3.1.1-1.

The test parameters are given in Table A.10.3.3.1.1-2 and cell-specific parameters for NR cells are provided in Table A.10.3.3.1.1-3 below. Cell-specific parameters for EUTRA PCell are provided in clause A.3.7.2.1.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are three carriers, each with one cell: Cell 1 (PCell) on radio channel 1 (PCC) in E-UTRA, Cell 2 (PSCell) on radio channel 2 (PSCC) in NR, and Cell3 (SCell) on radio channel 3 (SCC) in NR. Before the test starts the UE is connected to Cell 1 and Cell 2, but is not aware of Cell 3, as the UE is only monitoring PCC and PSCC. The UE shall be continuously scheduled in the PCell and PSCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 3) becomes configured on radio channel 2. The UE now starts monitoring the SCC. At the end of T1, the test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m , defines the start of time period T2. The UE shall be able to report a valid CSI in PSCell for the activated SCell at latest in slot $m + (T_{\text{HARQ}} + T_{\text{activation_time_withCCA}} + T_{\text{CSI_Reporting_withCCA}}) / \text{NR_slot_length}$, as defined in clause 8.3A.2. The UE shall start reporting CSI in PSCell in first available uplink resource for CSI reporting after at least one CSI-RS transmission occasion for channel measurement and reporting following slot $m + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PSCell interruption shall fall within the time window specified in clause 8.3A.2.

The point in time at which the MAC message is received by at the UE antenna connector, in a slot # denoted n , defines the start of time period T3. The UE shall complete the activation at latest in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$. Any PSCell interruption shall fall within the time window specified in clause 8.3A.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PSCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received, while taking into account CCA failures on SCC.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for SCell is discontinued.

Table A.10.3.3.1.1-1: Supported test configurations for SCell Activation and Deactivation of known NR SCell with NR PSCell and SCell under CCA, 160 ms SCell measurement cycle

Configuration	Description
1	PCC: LTE FDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	PCC: LTE TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.10.3.3.1.1-2: General test parameters for known SCell activation case with NR PSCell and SCell under CCA, 160 ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2,3	Three radio channels (1, 2, 3) are used for this test
Active PCell		Cell 1	Primary cell on E-UTRAN RF channel number 1.

Active PSCell		Cell 2	Primary secondary cell on NR RF channel number 2.
Configured deactivated SCell		Cell 3	Configured deactivated secondary cell on NR RF channel number 3
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
SCell measurement cycle (measCycleSCell)	ms	160	
Cell 3 timing offset to Cell 2	μ s	0	
Time alignment error between Cell 3 and Cell 2	μ s	$\leq$ TAE as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time PCell and PSCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T _{HARQ}	ms	$k_1 \times \text{NR slot length}$	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
T _{CSI_Reporting}	ms	$10 + 5 \cdot 2^{\mu_{DL}}$	The delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2] μ_{DL} is the subcarrier spacing configuration for DL

Table A.10.3.3.1.1-3: Cell specific test parameters for known SCell activation case with NR PSCell and SCell under CCA, 160 ms SCell measurement cycle

Parameter		Unit	Cell 2			Cell 3		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1,2		TDD			TDD		
TDD configuration	Config 1,2		TDDConf.1.1 CCA			TDDConf.1.1 CCA		
BW _{channel}	Config 1,2	MHz	40: N _{RB,C} = 106			40: N _{RB,C} = 106		
DL CCA model			As specified in clause A.3.26.2.1			As specified in clause A.3.26.2.1		
UL CCA model			As specified in clause A.3.26.2.2			As specified in clause A.3.26.2.2		
DL CCA probability for semi-static channel access ^{Note5,7}	P _{CCA_DL}		0.9375			0.9375		
DL CCA probability for dynamic channel access ^{Note6,7}	P _{CCA_DL_1}		0.75			0.75		
	P _{CCA_DL_2}		0.75			0.75		
UL CCA probability for semi-static channel access	P _{CCA_UL}		0.87			0.87		
UL CCA probability for dynamic channel access	P _{CCA_UL}		0.75			0.75		
L _{CCA_DL} ^{Note 8}			2			2		

W _{CCA_DL} ^{Note 8}			T _{activation_time_withCCA}	T _{activation_time_withCCA}
Initial downlink BWP configuration			DLBWP.0.2	DLBWP.0.2
Initial uplink BWP configuration			ULBWP.0.1	ULBWP.0.1
Dedicated downlink BWP configuration			DLBWP.0.2	DLBWP.0.2
Dedicated uplink BWP configuration			ULBWP.0.1	ULBWP.0.1
TCI state			TCI.State.0	TCI.State.0
TRS Configuration	Config 1,2		TRS.1.2 TDD	TRS.1.2 TDD
PDSCH Reference measurement channel	Config 1,2		SR.1.1 CCA	SR.1.1 CCA
Dedicated CORESET parameters	Config 1,2		CCR.1.3 CCA	CCR.1.3 CCA
RMSI CORESET parameters	Config 1,2		CR.1.1 CCA	CR.1.1 CCA
OCNG Patterns ^{Note1}			OP.1	OP.1
SSB Configuration for semi-static channel access ^{Note5,7}	Config 1,2		SSB.1 CCA	SSB.1 CCA
SSB Configuration for dynamic channel access ^{Note6,7}	Config 1,2		SSB.2 CCA	SSB.2 CCA
SMTC configuration			SMTC.1	SMTC.1
DBT window configuration			DBT.1	DBT.1
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS ^{Note1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note1}				
N _{oc} ^{Note2}	Config 1,2	dBm/15kHz	-104	-104
N _{oc} ^{Note2}	Config 1,2	dBm/SCS	-101	-101
$\bar{E}_s/I_{ot}$		dB	17	17
$\bar{E}_s/N_{oc}$		dB	17	17
SS-RSRP ^{Note3}	Config 1,2	dBm/SCS	-84	-84
I _o ^{Note3}	Config 1,2	dBm/38.16MHz	-52.87	-52.87
Propagation condition		-	AWGN	
Note 1: OCNG shall be used such that resources in the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts. OCNG is not transmitted during muted slots or during DBT windows.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 3: SS-RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.				
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.				
Note 8: As specified in clause 8.3A for L _{1,max} , L _{2.1,max} , L _{2.2,max} , L _{3.1,max} , and L _{3.2,max}				

A.10.3.3.1.2 Test Requirements

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [3] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot $m + (T_{\text{HARQ}} + T_{\text{activation_time_withCCA}} + T_{\text{CSI_Reporting_withCCA}})/\text{NR_slot_length}$, where $T_{\text{activation_time_withCCA}} = T_{\text{FirstSSB}} + L_1 \cdot T_{\text{rs}} + 5\text{ms}$, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR_slot_length}}$, as defined in clause 8.3A.3.

During T2, interruption on PSCell shall not occur outside slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR_slot_length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3 + T_{\text{X}}}{\text{NR_slot_length}}$ with $T_{\text{X}} = T_{\text{FirstSSB}}$.

During T3, interruption on PSCell shall not occur outside slot $n + 1 + T_{\text{HARQ}}/\text{NR_slot_length}$ to slot $n + 1 + (T_{\text{HARQ}} + 3\text{ms})/\text{NR_slot_length}$.

The interruption on PSCell shall not be more than specified for EN-DC in clause 8.2.1.2.4.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.10.3.3.2 SCell Activation and Deactivation of known NR SCell with NR PSCell and NR SCell under CCA, 640 ms SCell measurement cycle

A.10.3.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for NR SCell, with NR PSCell and NR SCell both under CCA, are within the requirements stated in clause 8.3A, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 640 ms.

The supported test configurations are same as in Table A.10.3.3.1.1-1 above.

The test parameters are same as in Table A.10.3.3.1.1-2 above, except for parameters listed below in Table A.10.3.3.2.1-1. The cell-specific parameters are same as in Table A.10.3.3.1.1-3 above.

The test execution is the same as described in clause A.10.3.3.1 above.

Table A.10.3.3.2.1-1: General test parameters for known NR SCell activation with NR PSCell and SCell under CCA, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

A.10.3.3.2.2 Test Requirements

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [3] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot $m + (T_{\text{HARQ}} + T_{\text{activation_time_withCCA}} + T_{\text{CSI_reporting_withCCA}})/\text{NR_slot_length}$, where $T_{\text{activation_time_withCCA}} = T_{\text{FirstSSB_MAX}} + L_{2,1} \cdot T_{\text{SMTC_MAX}} + (1 + L_{2,2}) \cdot T_{\text{rs}} + 5\text{ms}$, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR_slot_length}}$, as defined in clause 8.3A.3.

During T2, interruption on PSCell shall not occur outside slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR_slot_length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3 + T_{\text{X}}}{\text{NR_slot_length}}$ with $T_{\text{X}} = T_{\text{FirstSSB_MAX}} + L_{2,1} \cdot T_{\text{SMTC_MAX}}$.

During T3, interruption on PSCell shall not occur outside slot $n + 1 + T_{\text{HARQ}}/\text{NR_slot_length}$ to slot $n + 1 + (T_{\text{HARQ}} + 3\text{ms})/\text{NR_slot_length}$.

The interruption on PSCell shall not be more than specified for EN-DC in clause 8.2.1.2.4.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.10.3.3.3 SCell Activation and Deactivation of unknown NR SCell with NR PSCell and NR SCell under CCA

A.10.3.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for NR SCell, with NR PSCell and NR SCell both under CCA, are within the requirements stated in clause 8.3A, when the SCell is unknown to the UE at the time of activation.

The supported test configurations are same as in Table A.10.3.3.1.1-1 above.

The test parameters are same as in Table A.10.3.3.1.1-2 above, except for parameters listed below in Table A.10.3.3.1.1-1. The cell-specific parameters are same as in Table A.10.3.3.1.1-3 above.

The test execution is the same as described in clause A.10.3.3.1 above.

Table A.10.3.3.1-1: General test parameters for unknown NR SCell activation with NR PSCell and SCell under CCA

Parameter	Unit	Value	Comment
T1	s	0.1	During this time period PCell and PSCell shall be known and the SCell configured, but not detected.

A.10.3.3.3.2 Test Requirements

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [3] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot $m + (T_{\text{HARQ}} + T_{\text{activation_time_withCCA}} + T_{\text{CSI_reporting_withCCA}})/\text{NR_slot_length}$, where $T_{\text{activation_time_withCCA}} = T_{\text{FirstSSB_MAX}} + (1 + L_{3,1}) * T_{\text{SMTC_MAX}} + (2 + L_{3,2}) * T_{\text{IS}} + 5\text{ms}$, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR_slot_length}}$, as defined in clause 8.3A.3.

During T2, interruption on PSCell shall not occur outside slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR_slot_length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3 + T_{\text{X}}}{\text{NR_slot_length}}$ with $T_{\text{X}} = T_{\text{FirstSSB_MAX}} + L_{3,1} * T_{\text{SMTC_MAX}}$.

During T3, interruption on PSCell shall not occur outside slot $n + 1 + T_{\text{HARQ}}/\text{NR_slot_length}$ to slot $n + 1 + (T_{\text{HARQ}} + 3\text{ms})/\text{NR_slot_length}$.

The interruption on PSCell shall not be more than specified for EN-DC in clause 8.2.1.2.4.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.10.3.4 Beam failure detection and link recovery procedures

A.10.3.4.1 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in non-DRX mode

A.10.3.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5A.

The test parameters are given in Tables A.10.3.4.1.1-1, A.10.3.4.1.1-2, and A.10.3.4.1.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell which operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.10.3.4.1.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.10.3.4.1.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. The UE transmits the reporting according to UL CCA model. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40 ms) in test 1.

Table A.10.3.4.1.1-1: Supported test configurations for FR1 PSCell with CCA

Configuration	Description
1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.10.3.4.1.1-2: General test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active E-UTRA PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number			2	
DL CCA model			As specified in A.3.26.2.1	
UL CCA model			As specified in A.3.26.2.2	
Duplex mode	Config 1, 2		TDD	
BWchannel	Config 1, 2	MHz	40: NRBC = 106	
DL initial BWP configuration	Config 1, 2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2		ULBWP.0.1	

UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1	
TDD configuration	Config 1, 2		TDDConf.1.1 CCA	
CORESET Reference Channel	Config 1, 2		CR.1.1 CCA	
SSB Configuration	Config 1, 2		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access	
DBT Window Configuration	Config 1, 2		DBT.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		30 KHz	
PRACH Configuration	Config 1, 2		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			gp0	
gapOffset			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies

				the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SC S kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1, 2		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0,1	
T310 timer		ms	1000	
N310			2	
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.93	
T3		s	0.52	
T4		s	0	
T5		s	0.45	
D1		s	0.41	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				
Note 3: E-UTRAN is in non-DRX mode under test.				

Table A.10.3.4.1.1-3: Cell specific test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
DL CCA probability P _{CCA,DL}	Note 10, 12		1.0	0.9375	0.9375	0.9375	0.9375
	Note 11, 12		1.0/1.0	0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P _{CCA,UL}			1.0	1.0	1.0	1.0	1.0
L _{CCA_DL}			N/A	7			
W _{CCA_DL}		ms	N/A	T _{Evaluate_CBD_SSB_CCA} ^{Note 13}			
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q ₀	Config 1, 2	dB	5	-3	-12	-12	-12
SNR_SSB of set q ₁	Config 1, 2	dB	-10	-10	10	10	10
SSB_RP of set q ₁	Config 1, 2	dBm/SCS kHz	-105	-105	-85	-85	-85

N_{oc}	Config 1, 2	dBm/15 KHz	-98
Propagation condition			TDL-C 300ns 100Hz
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.		
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.		
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.		
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.		
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.		
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.		
Note 7:	SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT window.		
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.		
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6A.		
Note 10:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.		
Note 11:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2} .		
Note 12:	For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.		
Note 13:	As defined in Table 8.5A.5.2-1.		

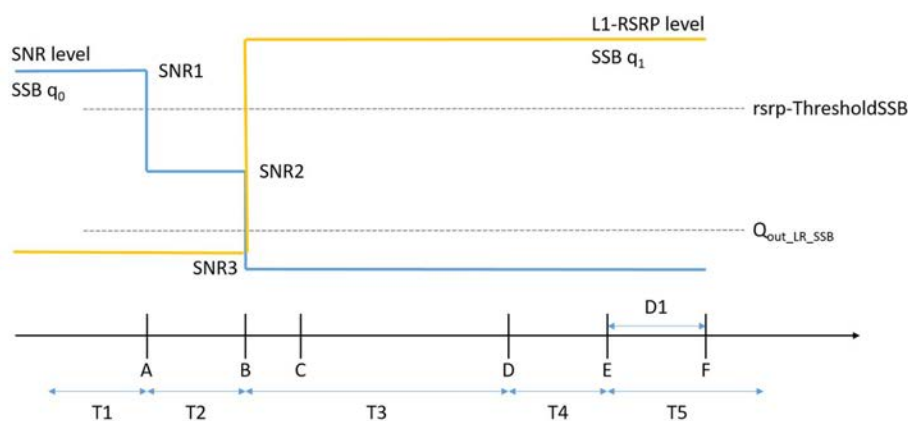


Figure A.10.3.4.1.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.10.3.4.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 410$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.10.3.4.2 EN-DC Beam Failure Detection and Link Recovery Test for FR1 PSCell configured with SSB-based BFD and LR in DRX mode

A.10.3.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving PSCell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP of the PSCell, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5A.

The test parameters are given in Tables A.10.3.4.2.1-1, A.10.3.4.2.1-2, and A.4.5.5.2.1-3 below. There are two cells, cell 1 is the E-UTRAN PCell, and cell 2 is the PSCell which operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.10.3.4.2.1-1 shows the variation of the downlink SNR of the PCell and the SNR of the SSB in set q_0 in the active PSCell to emulate SSB based beam failure. Figure A.10.3.4.2.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. The UE transmits the reporting according to UL CCA model. In the test, DRX configuration is enabled in PSCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.10.3.4.2.1-1: Supported test configurations for FR1 PSCell with CCA

Configuration	Description
1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.10.3.4.2.1-2: General test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active E-UTRA PCell			Cell 1	
E-UTRA RF Channel Number			1	
Active PSCell			Cell 2	
RF Channel Number			2	
DL CCA model			As specified in A.3.26.2.1	
UL CCA model			As specified in A.3.26.2.2	
Duplex mode	Config 1, 2		TDD	
BWchannel	Config 1, 2	MHz	40: NRB,c = 106	

DL initial BWP configuration	Config 1, 2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1	
TDD configuration	Config 1, 2		TDDConf.1.1 CCA	
CORESET Reference Channel	Config 1, 2		CR.1.1 CCA	
SSB Configuration	Config 1, 2		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access	
DBT Window Configuration	Config 1, 2		DBT.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		30 KHz	
PRACH Configuration	Config 1, 2		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	

DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/S CS kHz	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer			pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1, 2		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0,1	
T310 timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	9.01	
T3		s	5.16	
T4		s	0	
T5		s	3.89	
D1		s	3.85	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				
Note 3: E-UTRAN is in non-DRX mode under test.				

Table A.10.3.4.2.1-3: Cell specific test parameters for FR1 PSCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
DL CCA probability $P_{CCA,DL}$	Note 10, 12		1.0	0.9375	0.9375	0.9375	0.9375
	Note 11, 12		1.0/1.0	0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability $P_{CCA,UL}$			1.0	1.0	1.0	1.0	1.0
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1, 2	dB	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1, 2	dB	-10	-10	10	10	10

SSB_RP of set q_1	Config 1, 2	dBm/SCS kHz	-105	-105	-85	-85	-85
N_{oc}	Config 1, 2	dBm/15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT window.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.						
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6A.						
Note 10:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						
Note 11:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2} .						
Note 12:	For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.						

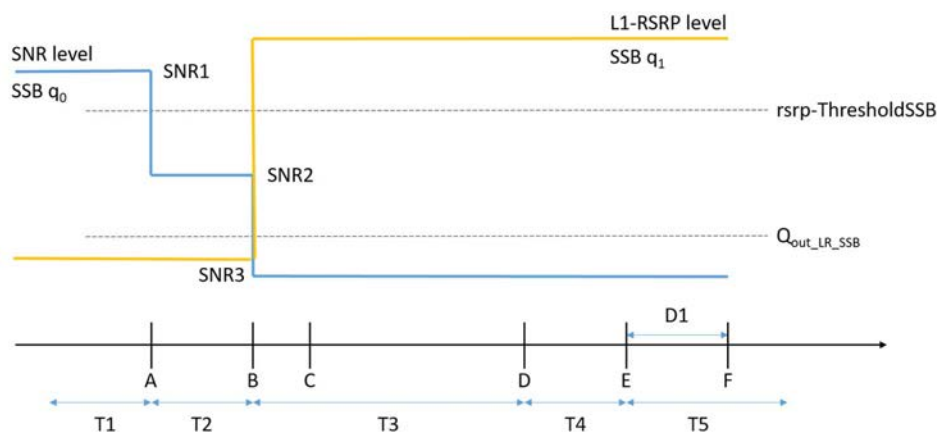


Figure A.10.3.4.2.1-1: SNR and L1-RSRP variation for SSB-based beam failure detection and link recovery testing in DRX mode

A.10.3.4.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 3850$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.10.3.5 Active BWP switching

A.10.3.5.1 UL active BWP switch delay with consistent UL LBT failure on PSCell subject to UL CCA in EN-DC

A.10.3.5.1.1 Test Purpose and Environment

The purpose of this test is to verify the UL BWP switch delay requirement defined in clause 8.6.4.

The supported test configurations are shown in Table A.10.3.5.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in A.10.3.5.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.10.3.5.1.1-2. SRS configuration used in the test is specified in Table A.10.3.5.1.1-4.

The UE shall be configured with PRACH configuration on UL BWP on which the UE shall switch after the consistent UL LBT failure detection.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1 and Cell 2 on radio channel 2.
- UE is configured with 2 different UE-specific downlink and uplink bandwidth parts on Cell 2: DL BWP-1, DL BWP-2, UL BWP-1 and UL BWP-2 before starting the test. DL BWP-1 and DL BWP-2 always include bandwidth of the initial DL BWP and SSB. UL BWP-1 and UL BWP-2 always include bandwidth of the SRS.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is DL BWP-1.
- UE is indicated in *firstActiveUplinkBWP-Id* that the active UL BWP is UL BWP-1.
- UE is configured with *LBT-FailureRecoveryConfig* parameters for Cell 2.

The cell has constant signal levels throughout the test. The test consists of 2 successive time periods, with durations of T1 and T2, respectively.

During T1,

- Time period T1 starts when the UE has received the SRS configuration for periodic SRS transmission on active UL BWP-1.
- The UE shall perform UL CCA before SRS transmission.
- The parameter UL CCA probability P_{CCA} is set to 0 during T1. This requires the test system to set energy level above the detection level during portion of the UL slot where the UE performs UL CCA. This in turn forces the UE to fail the UL CCA. The UE consistently fails UL CCA during T1 and is therefore unable to transmit SRS.

During T2,

- T2 starts when the UE detects consistent UL LBT failures i.e. when total number of UL LBT failures in Cell 2 on active UL BWP-1 exceeds *lbt-FailureInstanceMaxCount* during *lbt-FailureDetectionTimer*.
- The UE upon detected consistent UL LBT failure starts the LBT recovery mechanism, which requires the UE to switch to active UL BWP-2 in Cell 2 and to send PRACH in the active UL BWP-2.
- Starting from T2, the UE shall be able to send PRACH in the active UL BWP-2 within the delay specified in clause 8.6.4.

Table A.10.3.5.1.1-1: Supported test configurations for UL BWP switch test in EN-DC

Config	Description
1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.10.3.5.1.1-2: General test parameters for UL BWP switch in EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
<i>lbt-FailureDetectionTimer</i> [2]	ms	80	Parameter configured by IE: <i>LBT-FailureRecoveryConfig</i> [1]
<i>lbt-FailureInstanceMaxCount</i> [2]		4	Parameter configured by IE: <i>LBT-FailureRecoveryConfig</i> [1]
T1	s	0.1	During T1 consistent LBT failure is detected on active UL BWP-1
T2	s	0.1	During T2 UE sends PRACH on active UL BWP-2

Table A.10.3.5.1.1-3: NR Cell specific test parameters for UL BWP switch test in EN-DC

Parameter		Unit	Cell 2	
			T1	T2
TDD configuration	Config 1, 2		TDDConf.1.1 CCA	
BW _{channel}	Config 1, 2		40 MHz: N _{RB,c} = 106	
DL CCA model	Config 1, 2		As specified in clause A.3.20.2.1	
UL CCA model	Config 1, 2		As specified in clause A.3.20.2.2	
Active BWP ID	Config 1, 2		1, 2	
Initial DL BWP Configuration	Config 1, 2		DLBWP.0.2 ^{Note 4}	
Active DL BWP-1 Configuration	Config 1, 2		DLBWP.1.1 ^{Note 4}	
Active DL BWP-2 Configuration	Config 1, 2		DLBWP.1.3 ^{Note 4}	
Initial UL BWP Configuration	Config 1, 2		ULBWP.0.2 ^{Note 4}	
Active UL BWP-1 Configuration	Config 1, 2		ULBWP.1.1 ^{Note 4}	
Active UL BWP-2 Configuration	Config 1, 2		ULBWP.1.3 ^{Note 4}	
PDSCH Reference measurement channel	Config 1, 2		SR.1.1 CCA	
RMSI CORESET parameters	Config 1, 2		CR.1.1 CCA	
Dedicated CORESET parameters	Config 1, 2		CCR.1.1 CCA	
OCNG Patterns	Config 1, 2		OP.1	
SSB Configuration	Semi- static channel acces	Config 1, 2	SSB.1 CCA	

	Dynamic channel acces	Config 1, 2		SSB.2 CCA	
SMT-C Configuration		Config 1, 2		SMT-C.1 FR1	
Correlation Matrix and Antenna Configuration		Config 1, 2		1x2 Low	
TRS Configuration		Config 1, 2		TRS.1.2 TDD	
DL CCA probability for semi-static channel access (P_{CCA_DL})		Config 1, 2		1	1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)		Config 1, 2		1	1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)		Config 1, 2		1	1
UL CCA probability (P_{CCA_UL})		Config 1, 2		0	1
PRACH configuration		Config 1, 2		N/A	Configuration #1 in Table A.3.8.2.1-1
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} ^{Note 2}		Config 1, 2	dBm/SCS	-101	
SS-RSRP ^{Note 3}		Config 1, 2	dBm/SCS	-84	
$\hat{E}_s/I_{ot}$		Config 1, 2	dB	17	
$\hat{E}_s/N_{oc}$		Config 1, 2	dB	17	
I_o ^{Note3}		Config 1, 2	dBm/38.16MHz	-52.86	
Propagation Condition				AWGN	
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].					
Note 5: Parameters P_{CCA_DL} , $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.20.2.					
Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.					

Table A.10.3.5.1.1-4: Sounding Reference Symbol Configuration for UL BWP Switch Test in EN-DC

Field	Value	Comment
c-SRS	24	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation

usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting: SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.10.3.5.1.2 Test Requirements

The UE capable of *bwp-SwitchingDelay type1* [2] shall start to transmit the PRACH on active UL BWP-2 of Cell 2 (PSCell) less than 21.5 ms from the beginning of time period T1.

The UE capable of *bwp-SwitchingDelay type2* [2] shall start to transmit the PRACH on active UL BWP-2 of Cell 2 (PSCell) less than 23 ms from the beginning of time period T1.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The above delay is calculated as follows:’

The active UL BWP switch delay from UL BWP-1 to UL BWP-2 can be expressed as:

$$T_{\text{BWPswitchDelay}} * T_{\text{slot}} + 1 * T_{\text{slot}} + (1 + L_3) * T_{\text{SSB,RO}} + 10 \text{ ms}$$

Where:

- $T_{\text{BWPswitchDelay}}$ = 1 ms (2 slots) and 2.5 ms (5 slots) for *bwp-SwitchingDelay* [2] *type1* and *type2* UE capabilities according to clause 8.6.4.
- T_{slot} = It is the slot length. It is 0.5 ms for 30 kHz.
- L_3 = It is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $L_3 = 0$ during T2 since $P_{\text{CCA}} = 1$.
- $T_{\text{SSB,RO}}$ = 10 ms according to FR1 PRACH configuration 1.

This gives a total of 21.5 ms and 23 ms for *type1* and *type2* UE respectively.

A.10.3.5.2 DCI-based and Timer-based Active BWP Switch

A.10.3.5.2.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC

A.10.3.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in TS38.133 clause 8.6, and interruption requirement for E-UTRA victim cell defined in TS36.133 clause 7.32.2.7. Supported test configurations are shown in Table A.10.3.5.2.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), and one NR PSCell (Cell 2) as given in Table A.10.3.5.2.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell is specified in Table A.10.3.5.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PSCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after DL slot ($i + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after DL slot ($i + T_{BWPswitchDelay}$).

The starting time of PCell(Cell 1) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell(Cell 2).

During T3,

The time period T3 starts from the slot # j , where j is the beginning slot of the DL subframe immediately after the *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($j + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell at latest at the beginning of the DL slot right after DL slot ($j + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after DL slot ($j + T_{BWPswitchDelay}$).

The starting time of PCell(Cell 1) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PSCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to E-UTRA PCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell during BWP switch of PSCell, respectively.

Table A.10.3.5.2.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz

2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1:	The UE is only required to be tested in one of the supported test configurations.
Note 2:	A UE which fulfils the requirements in test case A.10.3.5.2.2 can skip the test cases in A.10.3.5.2.1.
Note 3:	The UE supporting EN-DC with only NR band(s) with shared spectrum access is required to be test.

Table A.10.3.5.2.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and PSCell
DL CCA model		As specified in clause A.3.26.2.1	
UL CCA model		As specified in clause A.3.26.2.2	
<i>bwp-InactivityTimer</i>	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.10.3.5.2.1.1-3.: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		TDDConf.1.1 CCA
BW _{channel}	Config 1,2		40 MHz: N _{RB,c} = 106
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,2		DLBWP.0.2 ^{Note 4}
Active DL BWP-1 Configuration	Config 1,2		DLBWP.1.1 ^{Note 4}
Active DL BWP-2 Configuration	Config 1,2		DLBWP.1.3 ^{Note 4}
Initial UL BWP Configuration	Config 1,2		ULBWP.0.2 ^{Note 4}
Active UL BWP-1 Configuration	Config 1,2		ULBWP.1.1 ^{Note 4}
Active UL BWP-2 Configuration	Config 1,2		ULBWP.1.3 ^{Note 4}
PDSCH Reference measurement channel	Config 1,2		SR.1.1 CCA
RMSI CORESET parameters	Config 1,2		CR.1.1 CCA
Dedicated CORESET parameters	Config 1,2		CCR.1.1 CCA
OCNG Patterns	Config 1,2		OP.1
SSB Configuration	Semi- static channel acces	Config 1,2	SSB.1 CCA
	Dynamic channel acces	Config 1,2	SSB.2 CCA
SMTC Configuration	Config 1,2		SMTC.1
TRS Configuration	Config 1,2		TRS.1.2 TDD
DL CCA probability for semi-static channel access (P _{CCA_DL})	Config 1,2		1
DL CCA model probability for dynamic static channel access (P _{CCA_DL_1})	Config 1,2		1
DL CCA model probability for dynamic static channel access (P _{CCA_DL_2})	Config 1,2		1

DL CCA probability for semi-static channel access (P_{CCA_DL})	Config 1,2		1
Correlation Matrix and Antenna Configuration			1x2 Low
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS (Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} ^{Note 2}	Config 1,2	dBm/SCS	-101
SS-RSRP ^{Note 3}	Config 1,2	dBm/SCS	-84
$\hat{E}_s/I_{ot}$	Config 1,2	dB	17
$\hat{E}_s/N_{oc}$	Config 1,2	dB	17
I_o ^{Note 3}	Config 1,2	dBm/38.16MHz	-59
Propagation Condition			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3]. Note 5: Parameters P_{CCA_DL}, $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.26.2. Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.			

A.10.3.5.2.1.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell in the DL slot right after DL slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK for PSCell in the DL slot right after DL slot $(j + T_{BWPswitchDelay} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start time of PCell interruption during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start time of PCell interruption of during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in TS36.133 Clause 7.32.2.7.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after DL slot $(i+T_{BWPswitchDelay}+k1)$, $(j+T_{BWPswitchDelay}+k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

A.10.3.5.2.2 E-UTRAN – NR PSCell FR1 DL active BWP switch with FR1 SCell in non-DRX in synchronous EN-DC

A.10.3.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirements for NR victim cell defined in clause 8.2.1.2.7 and interruption requirement for E-UTRA victim cell defined in clause 7.32.2.7 of TS 36.133 [15]. Supported test configurations are shown in Table A.10.3.5.2.2.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1), one NR PSCell (Cell 2) and one NR SCell (Cell 3) as given in Table A.10.3.5.2.2.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell and SCell are specified in Table A.10.3.5.2.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) and SCell (Cell 3) to ensure that the UE will have ACK/NACK sending.

PDCCHs indicating new transmissions shall be sent continuously on PSCell (Cell 2) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 2 and the time duration of T2.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), Cell 2 (PSCell) on radio channel 2 (PSCC) and Cell 3 (SCell) on radio channel 3 (SCC).
- UE is configured with 2 different UE-specific downlink bandwidth parts for PSCell, BWP-1 and BWP-2, in Cell 2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for SCell, BWP-0 in Cell 3 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PSCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in SCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PSCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PSCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot $(i+T_{BWPswitchDelay})$ as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell no later than at the beginning of the DL slot right after slot $(i+T_{BWPswitchDelay}+k1)$. The UE shall be continuously scheduled on PSCell's BWP-2 starting from the beginning of the DL slot right after slot $(i+T_{BWPswitchDelay})$.

PCell(Cell 1) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.

SCell(Cell 3) interruption due to BWP switch on PSCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PSCell(Cell 2).

During T3,

The time period T3 starts from the slot # j , where j is the beginning slot of the DL subframe immediately after the slot wherein *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($j + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PSCell at latest at the beginning of the DL slot right after slot ($j + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot ($j + T_{BWPswitchDelay}$).

PCell(Cell 1) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

SCell(Cell 3) interruption due to BWP switch of PSCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PSCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

The test equipment verifies that potential interruption to E-UTRA PCell and NR SCell is carried out in the correct time span by monitoring ACK/NACK sent in PCell and SCell during BWP switch of PSCell, respectively.

Table A.10.3.5.2.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1:	The UE is only required to be tested in one of the supported test configurations
Note 2:	A UE which fulfils the requirements in test case A.10.3.5.2.2 can skip the test cases in A.10.3.5.2.1.
Note 3:	NR configuration is the same for PSCell and SCells.
Note 4:	The UE supporting EN-DC with only NR band(s) with shared spectrum access is required to be tested.

Table A.10.3.5.2.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2, 3	Two NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
Active SCell		Cell 3	SCell on RF channel number 3.
CP length		Normal	
DRX		OFF	
DL CCA model		As specified in clause A.3.26.2.1	
UL CCA model		As specified in clause A.3.26.2.2	
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell-individual offset for cells on RF channel number 3	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
Cell3 timing offset to cell2	μs	3	Synchronous cells
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.10.3.5.2.2.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2	Cell 3
Frequency Range			FR1	
Duplex mode	Config 1,2		TDD	
TDD configuration	Config 1,2		TDDConf.1.1 CCA	
BW _{channel}	Config 1,2		40 MHz: N _{RB,c} = 106	
Active BWP ID			1, 2	0
Initial BWP Configuration	Config 1,2		DLBWP.0.2	DLBWP.0.2
Active BWP-0 Configuration	Config 1,2		NA	DLBWP.0.2
Active BWP-1 Configuration	Config 1,2		DLBWP.1.3	NA
Active BWP-2 Configuration	Config 1,2		DLBWP.1.1	NA
PDSCH Reference measurement channel	Config 1,2		SR.1.1 CCA	
RMSI CORESET parameters	Config 1,2		CR.1.1 CCA	
Dedicated CORESET parameters	Config 1,2		CCR.1.1 CCA	
OCNG Patterns	Config 1,2		OP.1	
SSB	Semi- static channel acces	Config 1,2	SSB.1 CCA	
Configuration	Dymamic channel acces	Config 1,2	SSB.2 CCA	
SMTc Configuration		Config 1,2	SMTc.1	
TRS Configuration		Config 1,2	TRS.1.2 TDD	
DL CCA probability for semi-static channel access (P _{CCA_DL})		Config 1,2	1	1
DL CCA model probability for dynamic static channel access (P _{CCA_DL_1})		Config 1,2	1	1
DL CCA model probability for dynamic static channel access (P _{CCA_DL_2})		Config 1,2	1	1
DL CCA probability for semi-static channel access (P _{CCA_DL})		Config 1,2	1	1
Correlation Matrix and Antenna Configuration			1x2	
Propagation Condition			AWGN	
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
N _{oc} ^{Note 2}	Config 1,2	dBm/SCS kHz	-101	-101
SS-RSRP ^{Note 3}	Config 1,2	dBm/SCS kHz	-84	-84
$\hat{E}_s/I_{ot}$	Config 1,2	dB	17	17
$\hat{E}_s/N_{oc}$	Config 1,2	dB	17	17
I _o ^{Note3}	Config 1,2	dBm/38.16M Hz	-59	-59
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not setttable parameters themselves.				
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].				
Note 5: Parameters P _{CCA_DL} , P _{CCA_DL_1} , P _{CCA_DL_2} and P _{CCA_UL} are defined in clause A.3.26.2.				
Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.				

A.10.3.5.2.2.2 Test Requirements

During T1, the UE shall start to send the ACK for PSCell in the DL slot right after slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK for PSCell in the DL slot right after slot $(j + T_{BWPswitchDelay} + k1)$.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1, the start of the interruption of PCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of PCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of PCell shall not be longer than the interruption duration specified for active BWP switch in clause 7.32.2.7 of TS 36.133 [15].

During T1, the start of the interruption of SCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

During T3, the start of the interruption of SCell during PSCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of SCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.6.2.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK in the DL slot right after slot $(i + T_{BWPswitchDelay} + k1)$, $(j + T_{BWPswitchDelay} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK.

Editor's note: FFS value of k1 for type 1 and type 2 UE.

A.10.3.5.3 RRC-based Active BWP Switch

A.10.3.5.3.1 E-UTRAN – NR PSCell FR1 DL active BWP switch in non-DRX in synchronous EN-DC

A.10.3.5.3.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.3. Supported test configurations are shown in Table A.10.3.5.3.1.1-1.

The test scenario comprises of one E-UTRA PCell (Cell 1) and one NR PSCell (Cell 2) as given in Table A.10.3.5.3.1.1-2. Cell-specific parameters of E-UTRA PCell are specified in Table A.3.7.2.1-1 and Cell-specific parameters of NR PSCell are specified in Table A.10.3.5.3.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC) and to Cell 2 (PSCell) on radio channel 2 (PSCC).
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PSCell).
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PSCell.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in PSCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to receive PDSCH at the beginning of the DL slot right after PSCell's DL slot ($i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$) as defined in clause 8.6.3 and be ready for the reception of uplink grant for the PSCell no later than at the beginning of the DL slot right after slot ($i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$). The UE shall be continuously scheduled on PSCell's BWP-1 starting from the beginning of the DL slot right after slot ($i + T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}$).

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.10.3.5.3.1.1-1: DL BWP switch supported test configurations

Config	Description
1	LTE FDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD, With CCA: NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
Note 1: The UE is only required to be tested in one of the supported test configurations.	
Note 2: The UE supporting EN-DC with only NR band(s) with shared spectrum access is required to be tested.	

Table A.10.3.5.3.1.1-2: General test parameters for DL BWP switch in synchronous EN-DC

Parameter	Unit	Value	Comment
E-UTRA RF Channel Number		1	One E-UTRA radio channel is used for this test
NR RF Channel Number		2	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active PSCell		Cell 2	PSCell on RF channel number 2.
CP length		Normal	
DRX		OFF	
DL CCA model		As specified in clause A.3.26.2.1	
UL CCA model		As specified in clause A.3.26.2.2	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on PSCC.
Cell2 timing offset to cell1	μs	3	Synchronous EN-DC
T1	s	0.2	

Table A.10.3.5.3.1.1-3: NR Cell specific test parameters for DL BWP switch in synchronous EN-DC

Parameter		Unit	Cell 2
Frequency Range			FR1
Duplex mode	Config 1,2		TDD
TDD configuration	Config 1,2		TDDConf.1.1 CCA
BW _{channel}	Config 1,2		40 MHz: N _{RB,c} = 106
Active DL BWP ID			1, 2
Initial DL BWP Configuration		Config 1,2	DLBWP.0.2
Initial UL BWP Configuration		Config 1,2	ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1,2	DLBWP.1.3
Final Condition	Active DL BWP-1 Configuration	Config 1,2	DLBWP.1.1
Initial UL BWP Configuration		Config 1,2	ULBWP.0.2
Active UL BWP-1 Configuration		Config 1,2	ULBWP.1.3
Active UL BWP-2 Configuration		Config 1,2	ULBWP.1.1
PDSCH Reference measurement channel		Config 1,2	SR.1.1 CCA
RMSI CORESET parameters		Config 1,2	CR.1.1 CCA
Dedicated CORESET parameters		Config 1,2	CCR.1.1 CCA
OCNG Patterns		Config 1,2	OP.1
SSB Configuration	Semi- static channel acces	Config 1,2	SSB.1 CCA
	Dynamic channel acces	Config 1,2	SSB.2 CCA
SMTC Configuration		Config 1,2	SMTC.1
TRS Configuration		Config 1,2	TRS.1.2 TDD
DL CCA probability for semi-static channel access (P _{CCA_DL})		Config 1,2	1
DL CCA model probability for dynamic static channel access (P _{CCA_DL_1})		Config 1,2	1
DL CCA model probability for dynamic static channel access (P _{CCA_DL_2})		Config 1,2	1
DL CCA probability for semi-static channel access (P _{CCA_DL})		Config 1,2	1
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N _{oc} ^{Note 2}	Config 1,2	dBm/SCS kHz	-101
SS-RSRP ^{Note 3}	Config 1,2	dBm/SCS kHz	-84
$\bar{E}_s/I_{ot}$	Config 1,2	dB	17
$\bar{E}_s/N_{oc}$	Config 1,2	dB	17
I ₀ ^{Note3}	Config 1,2	dBm/38.16MHz	-59

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].
Note 5:	Parameters P_{CCA_DL} , $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.26.2.
Note 6:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.10.3.5.3.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PSCell in the beginning of the DL slot right after slot $(i + T_{RRCP\text{rocessingDelay}} + T_{BWP\text{switchDelayRRC}})$.

All of the above test requirements shall be fulfilled in order for the observed PSCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.10.3.6 PSCell addition and release delay

A.10.3.6.1 Addition and Release Delay of known NR PSCell on the carrier under CCA

A.10.3.6.1.1 Test purpose and environment

The purpose of this test is to verify that the NR PSCell addition and release delays on the carrier under CCA under EN-DC are within the requirements stated in clause 7.31A.2 [15] for the case when the PSCell is known by the UE at the time of addition.

Supported test configurations are shown in A.10.3.6.1.1-1. The test parameters for the E-UTRA cell are given in Table A.3.7.2.1-1. The E-UTRA cell once set up is not changed across time.

The test parameters for NR cell are given in Tables A.10.3.6.1.1-2 and cell-specific parameters in A.10.3.6.1.1-3 below. The test consists of five successive time periods with duration of T1, T2, T3, T4 and T5 respectively. There are two carriers each with one cell. Before the test starts the UE is connected to Cell 1 (E-UTRA PCell) on radio channel 1 (PCC) but is not aware of Cell 2 (NR PSCell) on radio channel 2. The UE is only monitoring the PCC. During T1 only Cell1 is known to the UE.

Before the start of T2, the UE in the measurement control information that event-triggered reporting with Event B1 is configured for neighbour cell (Cell2). Before the start of T2 the UE is configured with the measurement gaps (gap pattern Id # 0). The Cell2 becomes known to the UE during T2. Therefore, during T2 the UE shall report Event B1. The point in time at which the RRC message to release measurement gap is transmitted from the test system defines the start of period T3. During T3, after measurement gap is released, the test system transmits the RRC message to the UE to add PSCell on radio channel 2.

The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added. The point in time at which the RRC message to add PSCell (Cell2) is received at the UE antenna connector defines the start of period T4.

The test system shall observe the periodic reporting of CSI for PSCell during T5. The point in time at which the UE has sent PRACH to the PSCell (Cell 2) defines the start of period T5.

The test system shall send a RRC message to the UE to release PSCell (Cell 2) on radio channel 2. The RRC message to release PSCell (Cell2) shall be sent to the UE during period T5, after the UE has sent at least one CQI report with non-zero CQI index for PSCell (Cell 2). The point in time at which the RRC message to release PSCell (Cell2) is received at the UE antenna connector defines the start of period T6.

Table A.10.3.6.1.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	LTE FDD, NR SCS 30 kHz, BW 40 MHz, TDD
2	LTE TDD, NR SCS 30 kHz, BW 40 MHz, TDD
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.10.3.6.1.1-2: General Test Parameters for PSCell Addition and Release

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two radio channels are used for this test. One for E-UTRA cell and second for NR Cell on the carrier under CCA
Initial	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour cell		Cell2	Neighbour cell on RF channel number 2.
Final Condition	Active PCell		Cell1	PCell on RF channel number 1.
	Neighbour Cell		Cell2	PSCell released on RF channel number 2.
B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-93	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	S	0	
DRX			OFF	Continuous monitoring of primary cell
DL CCA model	Dynamic channel access ^{Note 1, 3}			As specified in clause A.3.20.2.1
	Semi-static channel access ^{Note 2, 3}			
UL CCA model	Dynamic channel access ^{Note 1, 3}			As specified in clause A.3.20.2.2
	Semi-static channel access ^{Note 2,3}			
Measurement gap pattern Id			0	Gaps are configured before T2 and released before T3.
PRACH configuration on cell2			FR1 PRACH configuration 2	Captured in A.3.8.2.1
CQI/PMI periodicity and offset configuration index on cell2			2ms	CQI reporting for PSCell every uplink subframe
Cell-individual offset for cells on RF channel number 1		dB	0	Individual offset for cells on primary component carrier.
Cell-individual offset for cells on RF channel number 2		dB	0	Individual offset for cells on carrier frequency of cell2.
T304		ms	500	
LCCA_DL			5	
T1		s	1	During this time the PCell shall be known and cell2 shall be unknown.

T2	s	$\geq$ $T_{\text{identify_irat_cca_without_index}}$	$T_{\text{identify_irat_cca_without_index}}$ is defined in clause 8.1.2.4.21A and 8.1.2.4.22A in TS 36.133 During this time the UE shall identify neighbour cell (cell2) and report event B1.
T3	s	3	During this time the test system transmit the RRC messages to release measurement gap and add the PSCell
T4	s	$\geq$ $T_{\text{config_PSCell_withCCA}}$	During this time the UE adds the PSCell. $T_{\text{config_PSCell_withCCA}}$ is defined in clause 7.31A.2
T5	s	0.5	During this time the UE sends CSI reports for PSCell.
T6	s	0.5	During this time the UE releases the PSCell.
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.			
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.			
NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.10.3.6.1.1-3: Cell Specific Parameters for PSCell Addition and Release

Parameter	Unit	Config	Test				
			T1	T2	T3	T4	T5
$P_{\text{CCA_DL}}$ for dynamic channel access Note 5,7	-	$P_{\text{CCA_DL_1}}=0.75$ $P_{\text{CCA_DL_2}}=0.75$	$P_{\text{CCA_DL_1}}=0.75$ $P_{\text{CCA_DL_2}}=0.75$				
$P_{\text{CCA_DL}}$ for semi-static channel access Note 6,7	-	$P_{\text{CCA_DL}}=0.9375$	$P_{\text{CCA_DL}}=0.9375$				
$P_{\text{CCA_UL}}$ for dynamic channel access Note 5,7	-	1	1				
$P_{\text{CCA_UL}}$ for semi-static channel access Note 6,7	-	1	1				
E-UTRA RF Channel Number		1,2	1				
NR RF Channel Number		1,2	2				
TDD configuration		1,2	TDDConf.1.1 CCA				
BW_{channel}		1,2	40: $N_{\text{RB,C}} = 106$				
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1				
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1				
PDSCH Reference		1,2	SR1.1 CCA				
RMSI CORESET Reference		1,2	CR1.1 CCA				
Dedicated CORESET Reference		1,2	CCR1.1 CCA				
OCNG Patterns		1,2	OP.1				
DBT window configuration		1, 2	DBT.1				
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA				
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA				
SMTC configuration		1,2	SMTC.1				
TRS Configuration		1,2	TRS.1.2 TDD				
EPRE ratio of PSS to SSS							
EPRE ratio of PBCH DMRS to SSS							

EPRE ratio of PBCH to PBCH DMRS	dB	1,2	0	
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc}^{Note2}	dBm/15 kHz	1,2	N/A	-85
N_{oc}^{Note2}	dBm/SCS	1,2	N/A	-82
$\hat{E}_s/I_{ot}$		1,2	-infinity	0
$\hat{E}_s/N_{oc}$		1,2	-infinity	0
SS-RSRP ^{Note3}	dBm/SCS	1,2	-infinity	-82
Io ^{Note3}	dBm/38.1MHz	1,2	N/A	-51
Propagation condition		1,2	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during muted slots or during DBT windows.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
Note 7: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

A.10.3.6.1.2 Test Requirements

The UE shall transmit the PRACH to PSCell at latest $T_{\text{config_PSCell_withCCA}}^{Note1}$ into T4.

The UE shall send at least one CSI report for PSCell with non-zero CQI index during T5.

The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T5

The UE shall stop sending CSI reports for PSCell in at latest 20 ms into T6.

All the above test requirements shall be fulfilled in order for the observed PSCell addition delay and PSCell release delay to be counted as correct. The rate of correct observed PSCell addition delay and PSCell release delay during repeated tests shall be at least 90%.

Note1: The PSCell addition delay can be expressed as follows as specified in clause 7.31A.2 [15]:

$$T_{\text{config_PSCell_withCCA}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search_withCCA}} + T_{\Delta_withCCA} + T_{\text{PSCell_DU_withCCA}} + 2 \text{ ms}$$

Where:

$$T_{\text{RRC_delay}} = 20 \text{ ms}$$

$$T_{\text{processing}} = 20 \text{ ms}$$

$$T_{\text{search_withCCA}} = 0$$

$$T_{\Delta_withCCA} = (1 + L_2) \cdot 20 \text{ ms}$$

$$T_{\text{PSCell_DU_withCCA}} = 20 \text{ ms.}$$

L_2 is the number of SMTC occasions not available at the UE for fine time tracking and acquiring full timing information, where $L_2 \leq L_{\text{CCA_DL}}$.

A.10.3.7 Void

A.10.4 Measurement procedure

A.10.4.1 Intra-frequency measurements

A.10.4.1.1 Event-triggered reporting tests on PSCC without gaps under non-DRX

A.10.4.1.1.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.5.1 and 9.2A.5.2.

A.10.4.1.1.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and two cells on the same carrier frequency with CCA transmitting SSBs in DBT windows according to DL CCA model: PSCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table A.10.4.1.1.2-1 and A.10.4.1.1.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3.

Table A.10.4.1.1.2-1: Supported test configurations

Configuration	Description
1	LTE FDD; NR: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD; NR: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.10.4.1.1.2-2: General test parameters for intra-frequency event triggered reporting without gaps

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2	1	
NR RF Channel Number		Config 1,2	1, 2	

Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 with CCA (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 2 with CCA.
Neighbour cell		Config 1,2	NR cell 3	NR cell 3 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1,2	As specified in clause A.3.26.2.1	
UL CCA model		Config 1,2	As specified in clause A.3.26.2.2	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between PCell and PScell		Config 1,2	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μ s	Synchronous cells.
T1	s	Config 1,2	5	
T2	s	Config 1,2	5	

Table A.10.4.1.1.2-3: Cell-specific test parameters for intra-frequency event-triggered reporting without gaps

Parameter		Unit	Test configuration	Cell 2		Cell 3	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2	2		2	
Duplex mode			Config 1,2	TDD			
BW _{channel}		MHz	Config 1,2	40: N _{RB,c} = 106			
BWP BW		MHz	Config 1,2	40: N _{RB,c} = 106			
TDD configuration			Config 1,2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
Initial DL BWP			Config 1,2	DLBWP.0.1		NA	
Initial UL BWP			Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP			Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP			Config 1,2	ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2	SR.1.1 CCA		-	
CORESET Reference Channel			Config 1,2	CR.1.1 CCA		-	
SSB parameters	Semi-static channel access ^{Note 5,7}		Config 1,2	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access ^{Note 6,7}		Config 1,2	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration			Config 1,2	SMTC.1		SMTC.4	
PDSCH/PDCCH		kHz	Config 1,2	30		30	
DL CCA probability P _{CCA_DL}	Semi-static channel access ^{Note 5,7}		Config 1,2	P _{CCA_DL} =0.9375		P _{CCA_DL} =0.9375	

	Dynamic channel access ^{Note 6,7}		Config 1,2	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75		P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75	
UL CCA probability P _{CCA_UL}	Semi-static channel access ^{Note 5,7}		Config 1,2	P _{CCA_UL} =1		P _{CCA_UL} =1	
	Dynamic channel access ^{Note 6,7}		Config 1,2	P _{CCA_UL} =1		P _{CCA_UL} =1	
L _{CCA_DL}			Config 1,2	12		12	
W _{CCA_DL}		ms	Config 1,2	T _{PSS/SSS_sync_intra_cca}		T _{PSS/SSS_sync_intra_cca}	
EPRE ratio of PSS to SSS			Config 1,2	0	0		
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N _{oc} ^{Note2}		dBm/15k Hz	Config 1,2	-98		-98	
N _{oc} ^{Note2}		dBm/SC S	Config 1,2	-95		-95	
SS-RSRP ^{Note 3}		dBm/SC S	Config 1,2	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$		dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$		dB	Config 1,2	4	4	-Infinity	7
I _o ^{Note3}		dBm/38.1 6MHz	Config 1,2	-58.49	-54.64	-58.49	-54.64
Propagation Condition			Config 1,2	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.							
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.							
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.							
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.							

A.10.4.1.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_intra_without_index_CCA}}$ ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

$T_{\text{identify_intra_cca_without_index}} = (T_{\text{PSS/SSS_sync_intra_cca}} + T_{\text{SSB_measurement_period_intra_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_intra_cca}}$: it is the time period used in PSS/SSS detection given in table 9.2A.5.1-1.

$T_{\text{SSB_measurement_period_intra_cca}}$: equal to a measurement period of SSB based measurement given in table 9.2A.5.2-1.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TTI}_{\text{DCCH}}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.1.1.2 Void

A.10.4.1.1.3 Void

A.10.4.1.1.4 Event-triggered reporting tests on PSCC with per-UE gaps under DRX

A.10.4.1.4.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.6.1 and 9.2A.6.2.

A.10.4.1.4.2 Test parameters

Three cells are deployed in the test, which are E-UTRAN PCell (Cell 1) and two cells on the same carrier frequency with CCA transmitting SSBs in DBT windows according to DL CCA model: PSCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table A.10.4.1.4.2-1, A.10.4.1.4.2-2 and A.10.4.1.4.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PSCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3.

There are two BWPs configured in Cell 2, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 2. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.10.4.1.4.2-1: Supported test configurations

Configuration	Description
1	LTE FDD; NR: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD; NR: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.10.4.1.4.2-2: General test parameters for intra-frequency event triggered reporting with per-UE gaps

Parameter	Unit	Test configuration	Value	Comment

E-UTRA RF Channel Number		Config 1,2	1	
NR RF Channel Number		Config 1,2	1, 2	
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 with CCA (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 2 with CCA.
Neighbour cell		Config 1,2	NR cell 3	NR cell 3 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1,2	As specified in clause A.3.26.2.1	
UL CCA model		Config 1,2	As specified in clause A.3.26.2.2	
Measurement gap type		Config 1,2	Per-UE gaps	
Measurement gap repetition periodicity	ms	Config 1,2	40	
Measurement gap length	ms	Config 1,2	6	
Measurement gap offset	ms	Config 1,2	39	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	DRX.1	
Time offset between PCell and PScell		Config 1,2	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μ s	Synchronous cells.
T1	s	Config 1,2	5	
T2	s	Config 1,2	5	

Table A.10.4.1.1.2-3: Cell-specific test parameters for intra-frequency event-triggered reporting without gaps

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2	2		2	
Duplex mode		Config 1,2	TDD			
BW _{channel}	MHz	Config 1,2	40: N _{RB,C} = 106			
BWP BW	MHz	Config 1,2	40: N _{RB,C} = 106			
TDD configuration		Config 1,2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
TRS configuration		Config 1,2	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,2	SR.1.1 CCA		-	
CORESET Reference Channel		Config 1,2	CR.1.1 CCA		-	

SSB parameters	Semi-static channel access ^{Note 5,7}		Config 1,2	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access ^{Note 6,7}		Config 1,2	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration			Config 1,2	SMTC.1		SMTC.4	
PDSCH/PDCCH		kHz	Config 1,2	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access ^{Note 5,7}		Config 1,2	$P_{CCA_DL}=0.9375$		$P_{CCA_DL}=0.9375$	
	Dynamic channel access ^{Note 6,7}		Config 1,2	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	
UL CCA probability P_{CCA_UL}	Semi-static channel access ^{Note 5,7}		Config 1,2	$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
	Dynamic channel access ^{Note 6,7}		Config 1,2	$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
L_{CCA_DL}			Config 1,2	12		12	
W_{CCA_DL}		ms	Config 1,2	$T_{PSS/SSS_sync_intra_cca}$		$T_{PSS/SSS_sync_intra_cca}$	
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS (Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} ^{Note2}		dBm/15k Hz	Config 1,2	-98		-98	
N_{oc} ^{Note2}		dBm/SC S	Config 1,2	-95		-95	
SS-RSRP ^{Note 3}		dBm/SC S	Config 1,2	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$		dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$		dB	Config 1,2	4	4	-Infinity	7
I_o ^{Note3}		dBm/38.1 6MHz	Config 1,2	-58.49	-54.64	-58.49	-54.64
Propagation Condition			Config 1,2	AWGN			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

A.10.4.1.4.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_intra_without_index_CCA}}$ ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

$T_{\text{identify_intra_cca_without_index}} = (T_{\text{PSS/SSS_sync_intra_cca}} + T_{\text{SSB_measurement_period_intra_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_intra_cca}}$: it is the time period used in PSS/SSS detection given in table 9.2A.6.1-1.

$T_{\text{SSB_measurement_period_intra_cca}}$: equal to a measurement period of SSB based measurement given in table 9.2A.6.2-1.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TTI_DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.1.5 Void

A.10.4.1.6 Void

A.10.4.1.7 Void

A.10.4.1.8 Void

A.10.4.1.9 Void

A.10.4.1.10 Void

A.10.4.1.11 Void

A.10.4.1.12 Void

A.10.4.2 Inter-frequency measurements

A.10.4.2.1 Void

A.10.4.2.2 Void

A.10.4.2.3 EN-DC event triggered reporting tests for FR1 with CCA cell without SSB time index detection when DRX is not used

A.10.4.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters and configurations are given in Tables A.10.4.2.3.1-1, A.10.4.2.3.1-2, and A.10.4.2.3.1-3.

In this test measurement gap pattern configuration # 0 as defined in Table A.10.4.2.3.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.10.4.2.3.1-1.

Table A.10.4.2.3.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	E-UTRAN cell: LTE FDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	E-UTRAN cell: LTE TDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.10.4.2.3.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2	1	One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 with CCA (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 with CCA is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3	NR cell 3 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1,2	As specified in clause A.3.26.2.1	
UL CCA model		Config 1,2	As specified in clause A.3.26.2.2	
Gap Pattern Id		Config 1,2	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	9	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between PCell and PScell		Config 1,2	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μ s	Synchronous cells.
T1	s	Config 1,2	5	
T2	s	Config 1,2	1.7	

Table A.10.4.2.3.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD			
BW _{channel}	MHz	Config 1,2	40: N _{RB,C} = 106			
BWP BW	MHz	Config 1,2	40: N _{RB,C} = 106			
TDD configuration		Config 1,2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
TRS configuration		Config 1,2	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel		Config 1,2	SR.1.1 CCA		-	

CORESET Reference Channel			Config 1,2	CR.1.1 CCA		-	
SSB parameters	Semi-static channel access ^{Note 5,7}		Config 1,2	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access ^{Note 6,7}		Config 1,2	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration			Config 1,2	SMTC.1		SMTC.4	
PDSCH/PDCCH		kHz	Config 1,2	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access ^{Note 5,7}		Config 1,2	$P_{CCA_DL}=0.9375$		$P_{CCA_DL}=0.9375$	
	Dynamic channel access ^{Note 6,7}		Config 1,2	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	
UL CCA probability P_{CCA_UL}	Semi-static channel access ^{Note 5,7}		Config 1,2	$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
	Dynamic channel access ^{Note 6,7}		Config 1,2	$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
L_{CCA_DL}			Config 1,2	12		12	
W_{CCA_DL}		ms	Config 1,2	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2	0	0		
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} ^{Note2}		dBm/15k Hz	Config 1,2	-98		-98	
N_{oc} ^{Note2}		dBm/SC S	Config 1,2	-95		-95	
SS-RSRP ^{Note 3}		dBm/SC S	Config 1,2	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$		dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$		dB	Config 1,2	4	4	-Infinity	7
I_0 ^{Note3}		dBm/38.1 6MHz	Config 1,2	-58.49	-58.49	-63.94	-56.15

Propagation Condition	Config 1,2	AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.	
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.	
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.	
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.	
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.	
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.	
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.	

A.10.4.2.3.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_without_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index.

$T_{\text{identify_inter_cca_without_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.2.4 EN-DC event triggered reporting tests for FR1 cell with CCA without SSB time index detection when DRX is used

A.10.4.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters and configurations are given in Tables A.10.4.2.4.1-1, A.10.4.2.4.1-2, and A.10.4.2.4.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.10.4.2.4.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.10.4.2.4.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.10.4.2.4.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	E-UTRAN cell: LTE FDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	E-UTRAN cell: LTE TDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.10.4.2.4.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2		Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 with CCA (PSCell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 with CCA is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3		NR cell 3 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1,2	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2	0		As specified in clause A.3.3
Measurement gap offset		Config 1,2	9		
A3-Offset	dB	Config 1,2	-6		
Hysteresis	dB	Config 1,2	0		
CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	DRX.1	DRX.2	DRX is not used
Time offset between PCell and PSCell		Config 1,2	3 μ s		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μ s		Synchronous cells.
T1	s	Config 1,2	5		
T2	s	Config 1,2	2.5	17	

Table A.10.4.2.4.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter		Unit	Test configuration	Cell 2		Cell 3	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2	
Duplex mode			Config 1,2	TDD			
BW _{channel}		MHz	Config 1,2	40: N _{RB,c} = 106			
BWP BW		MHz	Config 1,2	40: N _{RB,c} = 106			
TDD configuration			Config 1,2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
Initial DL BWP			Config 1,2	DLBWP.0.1		NA	
Initial UL BWP			Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP			Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP			Config 1,2	ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2	OP.1		OP.1	
PDSCH Reference			Config 1,2	SR.1.1 CCA		-	
CORESET Reference Channel			Config 1,2	CR.1.1 CCA		-	
SSB parameters	Semi-static channel access ^{Note 5,7}		Config 1,2	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access ^{Note 6,7}		Config 1,2	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration			Config 1,2	SMTC.1		SMTC.4	
PDSCH/PDCCH		kHz	Config 1,2	30		30	
DL CCA probability P _{CCA_DL}	Semi-static channel access ^{Note 5,7}		Config 1,2	P _{CCA_DL} =0.9375		P _{CCA_DL} =0.9375	
	Dynamic channel access ^{Note 6,7}		Config 1,2	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75		P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75	
UL CCA probability P _{CCA_UL}	Semi-static channel access ^{Note 5,7}		Config 1,2	P _{CCA_UL} =1		P _{CCA_UL} =1	
	Dynamic channel access ^{Note 6,7}		Config 1,2	P _{CCA_UL} =1		P _{CCA_UL} =1	
L _{CCA_DL}			Config 1,2	5		5	
W _{CCA_DL}		ms	Config 1,2	T _{PSS/SSS_sync_inter_cca}		T _{PSS/SSS_sync_inter_cca}	
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							

EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15k Hz	Config 1,2	-98		-98	
N_{oc}^{Note2}	dBm/SC S	Config 1,2	-95		-95	
SS-RSRP ^{Note 3}	dBm/SC S	Config 1,2	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2	4	4	-Infinity	7
I_o^{Note3}	dBm/38.1 6MHz	Config 1,2	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.						
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.						

Table A.10.4.2.4.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.10.4.2.4.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.10.4.2.4.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_without_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_without_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2, the UE is not required to report SSB time index.

$T_{\text{identify_inter_cca_without_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

For test 1, DRX cycle = 40 ms and for test 2, DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TTI}_{\text{DCCH}}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.2.5 EN-DC event triggered reporting tests for FR1 cell with CCA with SSB time index detection when DRX is not used

A.10.4.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters and configurations are given in Tables A.10.4.2.5.1-1, A.10.4.2.5.1-2, and A.10.4.2.5.1-3.

In this test, measurement gap pattern configuration # 0 as defined in Table A.10.4.2.5.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.10.4.2.5.1-1.

Table A.10.4.2.5.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	E-UTRAN cell: LTE FDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	E-UTRAN cell: LTE TDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.10.4.2.5.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2	1	One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 with CCA (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 with CCA is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3	NR cell 3 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1,2	As specified in clause A.3.26.2.1	
UL CCA model		Config 1,2	As specified in clause A.3.26.2.2	
Gap Pattern Id		Config 1,2	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	9	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between PCell and PScell		Config 1,2	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μ s	Synchronous cells.
T1	s	Config 1,2	5	
T2	s	Config 1,2	2	

Table A.10.4.2.5.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2	1		2	
Duplex mode		Config 1,2	TDD			
BW _{channel}	MHz	Config 1,2	40: N _{RB,c} = 106			
BWP BW	MHz	Config 1,2	40: N _{RB,c} = 106			
TDD configuration		Config 1,2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
Initial UL BWP		Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP		Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP		Config 1,2	ULBWP.1.1		NA	
TRS configuration		Config 1,2	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2	OP.1		OP.1	
PDSCH Reference		Config 1,2	SR.1.1 CCA		-	

CORESET Reference Channel			Config 1,2	CR.1.1 CCA		-	
SSB parameters	Semi-static channel access ^{Note 5,7}		Config 1,2	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access ^{Note 6,7}		Config 1,2	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration			Config 1,2	SMTC.1		SMTC.4	
PDSCH/PDCCH		kHz	Config 1,2	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access ^{Note 5,7}		Config 1,2	$P_{CCA_DL}=0.9375$		$P_{CCA_DL}=0.9375$	
	Dynamic channel access ^{Note 6,7}		Config 1,2	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	
UL CCA probability P_{CCA_UL}	Semi-static channel access ^{Note 5,7}		Config 1,2	$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
	Dynamic channel access ^{Note 6,7}		Config 1,2	$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
L_{CCA_DL}			Config 1,2	5		5	
W_{CCA_DL}		ms	Config 1,2	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2	0	0		
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} ^{Note2}		dBm/15k Hz	Config 1,2	-98		-98	
N_{oc} ^{Note2}		dBm/SC S	Config 1,2	-95		-95	
SS-RSRP ^{Note 3}		dBm/SC S	Config 1,2	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$		dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$		dB	Config 1,2	4	4	-Infinity	7
I_0 ^{Note3}		dBm/38.1 6MHz	Config 1,2	-58.49	-58.49	-63.94	-56.15

Propagation Condition	Config 1,2	AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.	
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{OC} to be fulfilled.	
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.	
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.	
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.	
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.	
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.	

A.10.4.2.5.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_with_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, the UE is required to report SSB time index.

$T_{\text{identify_inter_cca_with_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}} + T_{\text{SSB_time_index_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_time_index_inter_cca}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TTI}_{\text{DCCH}}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.2.6 EN-DC event triggered reporting tests for FR1 cell with CCA with SSB time index detection when DRX is used

A.10.4.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters and configurations are given in Tables A.10.4.2.6.1-1, A.10.4.2.6.1-2, and A.10.4.2.6.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.10.4.2.6.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.10.4.2.6.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.10.4.2.6.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	E-UTRAN cell: LTE FDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	E-UTRAN cell: LTE TDD NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.10.4.2.6.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2	1, 2		Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cell		Config 1,2	LTE Cell 1 (PCell) and NR cell 2 with CCA (PSCell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 with CCA is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell 3		NR cell 3 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1,2	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	9		
A3-Offset	dB	Config 1,2	-6		
Hysteresis	dB	Config 1,2	0		
CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	DRX.1	DRX.2	As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2	3 μ s		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2	3 μ s		Synchronous cells.
T1	s	Config 1,2	5		
T2	s	Config 1,2	3	20	

Table A.10.4.2.6.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter		Unit	Test configuration	Cell 2		Cell 3	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2	
Duplex mode			Config 1,2	TDD			
BW _{channel}		MHz	Config 1,2	40: N _{RB,c} = 106			
BWP BW		MHz	Config 1,2	40: N _{RB,c} = 106			
TDD configuration			Config 1,2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
Initial DL BWP			Config 1,2	DLBWP.0.1		NA	
Initial UL BWP			Config 1,2	ULBWP.0.1		NA	
Dedicated DL BWP			Config 1,2	DLBWP.1.1		NA	
Dedicated UL BWP			Config 1,2	ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2	OP.1		OP.1	
PDSCH Reference			Config 1,2	SR.1.1 CCA		-	
CORESET Reference Channel			Config 1,2	CR.1.1 CCA		-	
SSB parameters	Semi-static channel access ^{Note 5,7}		Config 1,2	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access ^{Note 6,7}		Config 1,2	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1,2	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration			Config 1,2	SMTC.1		SMTC.4	
PDSCH/PDCCH		kHz	Config 1,2	30		30	
DL CCA probability P _{CCA_DL}	Semi-static channel access ^{Note 5,7}		Config 1,2	P _{CCA_DL} =0.9375		P _{CCA_DL} =0.9375	
	Dynamic channel access ^{Note 6,7}		Config 1,2	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75		P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75	
UL CCA probability P _{CCA_UL}	Semi-static channel access ^{Note 5,7}		Config 1,2	P _{CCA_UL} =1		P _{CCA_UL} =1	
	Dynamic channel access ^{Note 6,7}		Config 1,2	P _{CCA_UL} =1		P _{CCA_UL} =1	
L _{CCA_DL}			Config 1,2	2		2	
W _{CCA_DL}		ms	Config 1,2	T _{PSS/SSS_sync_inter_cca}		T _{PSS/SSS_sync_inter_cca}	
EPRE ratio of PSS to SSS							
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							

EPRE ratio of PDCCH to PDCCH DMRS		Config 1,2	0		0	
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15k Hz	Config 1,2	-98		-98	
N_{oc}^{Note2}	dBm/SC S	Config 1,2	-95		-95	
SS-RSRP ^{Note 3}	dBm/SC S	Config 1,2	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2	4	4	-Infinity	7
I_o^{Note3}	dBm/38.1 6MHz	Config 1,2	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.						
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.						

Table A.10.4.2.6.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1 Value	Test2 Value	Comment
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.10.4.2.6.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.10.4.2.6.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_with_}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_with_}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2, the UE is required to report SSB time index.

$T_{\text{identify_inter_cca_with_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}} + T_{\text{SSB_time_index_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_time_index_inter_cca}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

For test 1, DRX cycle = 40 ms and for test 2, DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TTI}_{\text{DCCH}}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.2.7 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is not used

A.10.4.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.10.4.2.7.1-1, A.10.4.2.7.1-2, and A.10.4.2.7.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.10.4.2.7.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.10.4.2.7.1-1.

Table A.10.4.2.7.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	E-UTRAN cell: LTE FDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
5	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
6	E-UTRAN cell: LTE TDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.10.4.2.7.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1	One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2	Two FR1 NR carrier frequencies are used. NR RF channel 1 is with CCA.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3	NR cell 3 is on NR RF channel number 2.
DL CCA model		Config 1,2,3,4,5,6	As specified in clause A.3.26.2.1	
UL CCA model		Config 1,2,3,4,5,6	As specified in clause A.3.26.2.2	
Gap Pattern Id		Config 1,2,3,4,5,6	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9	
A3-Offset	dB	Config 1,2,3,4,5,6	-6	
Hysteresis	dB	Config 1,2,3,4,5,6	0	
CP length		Config 1,2,3,4,5,6	Normal	
TimeToTrigger	s	Config 1,2,3,4,5,6	0	
Filter coefficient		Config 1,2,3,4,5,6	0	L3 filtering is not used

DRX		Config 1,2,3,4,5,6	OFF	DRX is not used
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2,3,4,5,6	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 1,2,3,4,5,6	3 μ s	Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5	
T2	s	Config 1,2,3,4,5,6	1.7	

Table A.10.4.2.7.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter		Unit	Test configuration	Cell 2		Cell 3	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4,5,6	1		2	
Duplex mode			Config 1,4	TDD		FDD	
			Config 2,3,5,6	TDD		TDD	
BW _{channel}		MHz	Config 1,2,4,5	40: N _{RB,c} = 106		10: N _{RB,c} = 52	
			Config 3,6	40: N _{RB,c} = 106		40: N _{RB,c} = 106	
BWP BW		MHz	Config 1,2,4,5	40: N _{RB,c} = 106		10: N _{RB,c} = 52	
			Config 3,6	40: N _{RB,c} = 106		40: N _{RB,c} = 106	
TDD configuration			Config 1,4	TDDConf.1.1 CCA		NA	
			Config 2,5	TDDConf.1.1 CCA		TDDConf.1.1	
			Config 3,6	TDDConf.1.1 CCA		TDDConf.2.1	
Initial DL BWP			Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP			Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP			Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP			Config 1,2,3,4,5,6	ULBWP.1.1		NA	
TRS configuration			Config 1,2,3,4,5,6	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 CCA		SR.1.1 FDD	
			Config 2,5	SR.1.1 CCA		SR.1.1 TDD	
			Config 3,6	SR.1.1 CCA		SR.2.1 TDD	
CORESET Reference Channel			Config 1,4	CR.1.1 CCA		CR.1.1 FDD	
			Config 2,5	CR.1.1 CCA		CR.1.1 TDD	
			Config 3,6	CR.1.1 CCA		CR.2.1 TDD	
SSB parameters	Semi-static channel access ^{Note 5,7}		Config 1,4	SSB.1 CCA		SSB.1 FR1	
			Config 2,5	SSB.1 CCA		SSB.1 FR1	
			Config 3,6	SSB.1 CCA		SSB.2 FR1	
	Dynamic channel access ^{Note 6,7}		Config 1,4	SSB.2 CCA		SSB.1 FR1	
			Config 2,5	SSB.2 CCA		SSB.1 FR1	
			Config 3,6	SSB.2 CCA		SSB.2 FR1	
DBT window configuration			Config 1,2,3,4,5,6	As defined in A.3.28.1		Not applicable	

SMTC configuration defined in A.3.11			Config 1,4	SMTC.2		SMTC.5	
			Config 2,3,5,6	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4,5	30		15	
			Config 3,6	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access ^{Note 5,7}		Config 1,2,3,4,5,6	$P_{CCA_DL}=0.9375$		Not applicable	
	Dynamic channel access ^{Note 6,7}		Config 1,2,3,4,5,6	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		Not applicable	
UL CCA probability P_{CCA_UL}	Semi-static channel access ^{Note 5,7}		Config 1,2,3,4,5,6	$P_{CCA_UL}=1$		Not applicable	
	Dynamic channel access ^{Note 6,7}		Config 1,2,3,4,5,6	$P_{CCA_UL}=1$		Not applicable	
L_{CCA_DL}			Config 1,2,3,4,5,6	12		12	
W_{CCA_DL}		ms	Config 1,2,3,4,5,6	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} ^{Note2}	dBm/15k Hz		Config 1,2,3,4,5,6	-98		-98	
N_{oc} ^{Note2}	dBm/SC S		Config 1,2,4,5	-98		-95	
			Config 3,6	-95		-95	
SS-RSRP ^{Note 3}	dBm/SC S		Config 1,2,4,5	-94	-94	-Infinity	-88
			Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{\alpha}$	dB		Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB		Config 1,2,3,4,5,6	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36 MHz		NR Config 1,2,4,5	-64.59	-64.59	-63.94	-56.15
	dBm/38.1 6MHz		NR Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2,3,4,5,6	AWGN			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

A.10.4.2.7.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_without_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index.

$T_{\text{identify_inter_cca_without_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.2.8 EN-DC event triggered reporting tests for FR1 cell without SSB time index detection when DRX is used

A.10.4.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.10.4.2.8.1-1, A.10.4.2.8.1-2, and A.10.4.2.8.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.10.4.2.8.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.10.4.2.8.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.10.4.2.8.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	E-UTRAN cell: LTE FDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
5	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mod
6	E-UTRAN cell: LTE TDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.10.4.2.8.1-2: General test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		Two FR1 NR carrier frequencies are used. NR RF channel 1 is with CCA.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
DL CCA model		Config 1,2,3,4,5,6	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2,3,4,5,6	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2,3,4,5,6	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9		
A3-Offset	dB	Config 1,2,3,4,5,6	-6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
CP length		Config 1,2,3,4,5,6	Normal		

TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX		Config 1,2,3,4,5,6	DRX.1	DRX.2	As specified in clause A.3.3
Time offset between PCell and PSCell		Config 1,2,3,4,5,6	3 μ s		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2,3,4,5,6	3 ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 1,2,3,4,5,6	3 μ s		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	2.5	17	

Table A.10.4.2.8.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting without SSB time index detection

Parameter		Unit	Test configuration	Cell 2		Cell 3	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4,5,6	1		2	
Duplex mode			Config 1,4	TDD		FDD	
			Config 2,3,5,6	TDD		TDD	
BW _{channel}		MHz	Config 1,2,4,5	40: N _{RB,c} = 106		10: N _{RB,c} = 52	
			Config 3,6	40: N _{RB,c} = 106		40: N _{RB,c} = 106	
BWP BW		MHz	Config 1,2,4,5	40: N _{RB,c} = 106		10: N _{RB,c} = 52	
			Config 3,6	40: N _{RB,c} = 106		40: N _{RB,c} = 106	
TDD configuration			Config 1,4	TDDConf.1.1 CCA		NA	
			Config 2,5	TDDConf.1.1 CCA		TDDConf.1.1	
			Config 3,6	TDDConf.1.1 CCA		TDDConf.2.1	
Initial DL BWP			Config 1,2,3,4,5,6	DLBWP.0.1		NA	
Initial UL BWP			Config 1,2,3,4,5,6	ULBWP.0.1		NA	
Dedicated DL BWP			Config 1,2,3,4,5,6	DLBWP.1.1		NA	
Dedicated UL BWP			Config 1,2,3,4,5,6	ULBWP.1.1		NA	
TRS configuration			Config 1,2,3,4,5,6	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4,5,6	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 CCA		SR.1.1 FDD	
			Config 2,5	SR.1.1 CCA		SR.1.1 TDD	
			Config 3,6	SR.1.1 CCA		SR.2.1 TDD	
CORESET Reference Channel			Config 1,4	CR.1.1 CCA		CR.1.1 FDD	
			Config 2,5	CR.1.1 CCA		CR.1.1 TDD	
			Config 3,6	CR.1.1 CCA		CR.2.1 TDD	
SSB parameters	Semi-static channel access ^{Note 5,7}		Config 1,4	SSB.1 CCA		SSB.1 FR1	
			Config 2,5	SSB.1 CCA		SSB.1 FR1	
			Config 3,6	SSB.1 CCA		SSB.2 FR1	
	Dynamic channel		Config 1,4	SSB.2 CCA		SSB.1 FR1	
			Config 2,5	SSB.2 CCA		SSB.1 FR1	

		access ^{Note 6,7}		Config 3,6	SSB.2 CCA		SSB.2 FR1	
DBT window configuration				Config 1,2,3,4,5,6	As defined in A.3.28.1		Not applicable	
SMTC configuration defined in A.3.11				Config 1,4	SMTC.2		SMTC.5	
				Config 2,3,5,6	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing			kHz	Config 1,2,4,5	30		15	
				Config 3,6	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access ^{Note 5,7}		Config 1,2,3,4,5,6	$P_{CCA_DL}=0.9375$		Not applicable		
	Dynamic channel access ^{Note 6,7}		Config 1,2,3,4,5,6	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		Not applicable		
UL CCA probability P_{CCA_UL}	Semi-static channel access ^{Note 5,7}		Config 1,2,3,4,5,6	$P_{CCA_UL}=1$		Not applicable		
	Dynamic channel access ^{Note 6,7}		Config 1,2,3,4,5,6	$P_{CCA_UL}=1$		Not applicable		
L_{CCA_DL}				Config 1,2,3,4,5,6	5		5	
W_{CCA_DL}			ms	Config 1,2,3,4,5,6	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS				Config 1,2,3,4,5,6	0	0		
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} ^{Note2}			dBm/15k Hz	Config 1,2,3,4,5,6	-98		-98	
N_{oc} ^{Note2}			dBm/SC S	Config 1,2,4,5	-98		-95	
				Config 3,6	-95		-95	
SS-RSRP ^{Note 3}			dBm/SC S	Config 1,2,4,5	-94	-94	-Infinity	-88
				Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$			dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$			dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
I_o ^{Note3}			dBm/9.36 MHz	NR Config 1,2,4,5	-64.59	-64.59	-63.94	-56.15
			dBm/38.1 6MHz	NR Config 3,6	-58.49	-58.49	-63.94	-56.15

Propagation Condition		Config 1,2,3,4,5,6	AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.		
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.		
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.		
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.		

Table A.10.4.2.8.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.10.4.2.8.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.10.4.2.8.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_without_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_without_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2, the UE is not required to report SSB time index.

$T_{\text{identify_inter_cca_without_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

For test 1, DRX cycle = 40 ms and for test 2, DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.2.9 EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is not used

A.10.4.2.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.10.4.2.9.1-1, A.10.4.2.9.1-2, and A.10.4.2.9.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.10.4.2.9.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.10.4.2.9.1-1.

Table A.10.4.2.9.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	E-UTRAN cell: LTE FDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
5	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mod
6	E-UTRAN cell: LTE TDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.10.4.2.9.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1	One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2	Two FR1 NR carrier frequencies are used. NR RF channel 1 is with CCA.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)	LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3	NR cell 3 is on NR RF channel number 2.
DL CCA model		Config 1,2,3,4,5,6	As specified in clause A.3.26.2.1	
UL CCA model		Config 1,2,3,4,5,6	As specified in clause A.3.26.2.2	
Gap Pattern Id		Config 1,2,3,4,5,6	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9	
A3-Offset	dB	Config 1,2,3,4,5,6	-6	
Hysteresis	dB	Config 1,2,3,4,5,6	0	
CP length		Config 1,2,3,4,5,6	Normal	
TimeToTrigger	s	Config 1,2,3,4,5,6	0	
Filter coefficient		Config 1,2,3,4,5,6	0	L3 filtering is not used
DRX		Config 1,2,3,4,5,6	OFF	DRX is not used
Time offset between PCell and PScell		Config 1,2,3,4,5,6	3 μ s	Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2,3,4,5,6	3 ms	Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 1,2,3,4,5,6	3 μ s	Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5	
T2	s	Config 1,2,3,4,5,6	2	

Table A.10.4.2.9.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3,4,5,6	1		2	
Duplex mode		Config 1,4	TDD		FDD	
		Config 2,3,5,6	TDD		TDD	
BW _{channel}	MHz	Config 1,2,4,5	40: N _{RB,C} = 106		10: N _{RB,C} = 52	

BWP BW	MHz	Config 3,6	40: $N_{RB,c} = 106$	40: $N_{RB,c} = 106$
		Config 1,2,4,5	40: $N_{RB,c} = 106$	10: $N_{RB,c} = 52$
		Config 3,6	40: $N_{RB,c} = 106$	40: $N_{RB,c} = 106$
TDD configuration		Config 1,4	TDDConf.1.1 CCA	NA
		Config 2,5	TDDConf.1.1 CCA	TDDConf.1.1
		Config 3,6	TDDConf.1.1 CCA	TDDConf.2.1
Initial DL BWP		Config 1,2,3,4,5,6	DLBWP.0.1	NA
Initial UL BWP		Config 1,2,3,4,5,6	ULBWP.0.1	NA
Dedicated DL BWP		Config 1,2,3,4,5,6	DLBWP.1.1	NA
Dedicated UL BWP		Config 1,2,3,4,5,6	ULBWP.1.1	NA
TRS configuration		Config 1,2,3,4,5,6	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4,5,6	OP.1	OP.1
PDSCH Reference measurement channel		Config 1,4	SR.1.1 CCA	SR.1.1 FDD
		Config 2,5	SR.1.1 CCA	SR.1.1 TDD
		Config 3,6	SR.1.1 CCA	SR.2.1 TDD
CORESET Reference Channel		Config 1,4	CR.1.1 CCA	CR.1.1 FDD
		Config 2,5	CR.1.1 CCA	CR.1.1 TDD
		Config 3,6	CR.1.1 CCA	CR.2.1 TDD
SSB parameters	Semi-static channel access ^{Note 5,7}	Config 1,4	SSB.1 CCA	SSB.1 FR1
		Config 2,5	SSB.1 CCA	SSB.1 FR1
		Config 3,6	SSB.1 CCA	SSB.2 FR1
	Dynamic channel access ^{Note 6,7}	Config 1,4	SSB.2 CCA	SSB.1 FR1
		Config 2,5	SSB.2 CCA	SSB.1 FR1
		Config 3,6	SSB.2 CCA	SSB.2 FR1
DBT window configuration		Config 1,2,3,4,5,6	As defined in A.3.28.1	Not applicable
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2	SMTC.5
		Config 2,3,5,6	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2,4,5	30	15
		Config 3,6	30	30
DL CCA probability P_{CCA_DL}	Semi-static channel access ^{Note 5,7}	Config 1,2,3,4,5,6	$P_{CCA_DL}=0.9375$	Not applicable
	Dynamic channel access ^{Note 6,7}	Config 1,2,3,4,5,6	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	Not applicable
UL CCA probability P_{CCA_UL}	Semi-static channel access ^{Note 5,7}	Config 1,2,3,4,5,6	$P_{CCA_UL}=1$	Not applicable
	Dynamic channel access ^{Note 6,7}	Config 1,2,3,4,5,6	$P_{CCA_UL}=1$	Not applicable
L_{CCA_DL}		Config 1,2,3,4,5,6	5	5
W_{CCA_DL}	ms	Config 1,2,3,4,5,6	$T_{PSS/SSS_sync_inter_cca}$	$T_{PSS/SSS_sync_inter_cca}$
EPRE ratio of PSS to SSS				

EPRE ratio of PBCH DMRS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15k Hz	Config 1,2,3,4,5,6	-98		-98	
N_{oc}^{Note2}	dBm/SC S	Config 1,2,4,5	-98		-95	
		Config 3,6	-95		-95	
SS-RSRP ^{Note 3}	dBm/SC S	Config 1,2,4,5	-94	-94	-Infinity	-88
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
I_o^{Note3}	dBm/9.36 MHz	NR Config 1,2,4,5	-64.59	-64.59	-63.94	-56.15
	dBm/38.1 6MHz	NR Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.						
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.						

A.10.4.2.9.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_with_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is required to report SSB time index.

$T_{identify_inter_cca_with_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca} + T_{SSB_time_index_inter_cca})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_time_index_inter_cca}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TTI}_{\text{DCCH}}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.2.10 EN-DC event triggered reporting tests for FR1 cell with SSB time index detection when DRX is used

A.10.4.2.10.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the EN-DC inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters and configurations are given in Tables A.10.4.2.10.1-1, A.10.4.2.10.1-2, and A.10.4.2.10.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.10.4.2.10.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

The configuration of LTE cell 1 is defined in table A.3.7.2.1-1. Supported test configurations are shown in table A.10.4.2.10.1-1.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.10.4.2.10.1-1: EN-DC event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	E-UTRAN cell: LTE FDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	E-UTRAN cell: LTE FDD NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
4	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
5	E-UTRAN cell: LTE TDD NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mod
6	E-UTRAN cell: LTE TDD

	NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.10.4.2.10.1-2: General test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2,3,4,5,6	1		One E-UTRAN carrier frequency is used.
NR RF Channel Number		Config 1,2,3,4,5,6	1, 2		Two FR1 NR carrier frequencies are used. NR RF channel 1 is with CCA.
Active cell		Config 1,2,3,4,5,6	LTE Cell 1 (PCell) and NR cell 2 (PScell)		LTE Cell 1 is on E-UTRA RF channel number 1. NR Cell 2 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3,4,5,6	NR cell 3		NR cell 3 is on NR RF channel number 2.
DL CCA model		Config 1,2,3,4,5,6	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2,3,4,5,6	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2,3,4,5,6	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4,5,6	9		
A3-Offset	dB	Config 1,2,3,4,5,6	-6		
Hysteresis	dB	Config 1,2,3,4,5,6	0		
CP length		Config 1,2,3,4,5,6	Normal		
TimeToTrigger	s	Config 1,2,3,4,5,6	0		
Filter coefficient		Config 1,2,3,4,5,6	0		L3 filtering is not used
DRX		Config 1,2,3,4,5,6	DRX.1	DRX.2	As specified in clause A.3.3
Time offset between PCell and PScell		Config 1,2,3,4,5,6	3 μ s		Synchronous EN-DC
Time offset between serving and neighbour cells		Config 1,2,3,4,5,6	3 ms		Asynchronous cells. The timing of Cell 3 is 3ms later than the timing of Cell 2.
		Config 1,2,3,4,5,6	3 μ s		Synchronous cells.
T1	s	Config 1,2,3,4,5,6	5		
T2	s	Config 1,2,3,4,5,6	3	20	

Table A.10.4.2.10.1-3: Cell specific test parameters for EN-DC inter-frequency event triggered reporting with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2

NR RF Channel Number			Config 1,2,3,4,5,6	1	2
Duplex mode			Config 1,4	TDD	FDD
			Config 2,3,5,6	TDD	TDD
BW _{channel}		MHz	Config 1,2,4,5	40: N _{RB,c} = 106	10: N _{RB,c} = 52
			Config 3,6	40: N _{RB,c} = 106	40: N _{RB,c} = 106
BWP BW		MHz	Config 1,2,4,5	40: N _{RB,c} = 106	10: N _{RB,c} = 52
			Config 3,6	40: N _{RB,c} = 106	40: N _{RB,c} = 106
TDD configuration			Config 1,4	TDDConf.1.1 CCA	NA
			Config 2,5	TDDConf.1.1 CCA	TDDConf.1.1
			Config 3,6	TDDConf.1.1 CCA	TDDConf.2.1
Initial DL BWP			Config 1,2,3,4,5,6	DLBWP.0.1	NA
Initial UL BWP			Config 1,2,3,4,5,6	ULBWP.0.1	NA
Dedicated DL BWP			Config 1,2,3,4,5,6	DLBWP.1.1	NA
Dedicated UL BWP			Config 1,2,3,4,5,6	ULBWP.1.1	NA
TRS configuration			Config 1,2,3,4,5,6	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4,5,6	OP.1	OP.1
PDSCH Reference measurement channel			Config 1,4	SR.1.1 CCA	SR.1.1 FDD
			Config 2,5	SR.1.1 CCA	SR.1.1 TDD
			Config 3,6	SR.1.1 CCA	SR.2.1 TDD
CORESET Reference Channel			Config 1,4	CR.1.1 CCA	CR.1.1 FDD
			Config 2,5	CR.1.1 CCA	CR.1.1 TDD
			Config 3,6	CR.1.1 CCA	CR.2.1 TDD
SSB parameters	Semi-static channel access ^{Note} 5,7		Config 1,4	SSB.1 CCA	SSB.1 FR1
			Config 2,5	SSB.1 CCA	SSB.1 FR1
			Config 3,6	SSB.1 CCA	SSB.2 FR1
	Dynamic channel access ^{Note} 6,7		Config 1,4	SSB.2 CCA	SSB.1 FR1
			Config 2,5	SSB.2 CCA	SSB.1 FR1
			Config 3,6	SSB.2 CCA	SSB.2 FR1
DBT window configuration			Config 1,2,3,4,5,6	As defined in A.3.28.1	Not applicable
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2	SMTC.5
			Config 2,3,5,6	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4,5	30	15
			Config 3,6	30	30
DL CCA probability P _{CCA_DL}	Semi-static channel access ^{Note} 5,7		Config 1,2,3,4,5,6	P _{CCA_DL} =0.9375	Not applicable
	Dynamic channel access ^{Note} 6,7		Config 1,2,3,4,5,6	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75	Not applicable
UL CCA probability P _{CCA_UL}	Semi-static channel access ^{Note} 5,7		Config 1,2,3,4,5,6	P _{CCA_UL} =1	Not applicable
	Dynamic channel access ^{Note} 6,7		Config 1,2,3,4,5,6	P _{CCA_UL} =1	Not applicable

LCCA_DL		Config 1,2,3,4,5,6	2		2	
W _{CCA_DL}	ms	Config 1,2,3,4,5,6	T _{PSS/SSS_sync_inter_cca}		T _{PSS/SSS_sync_inter_cca}	
EPRE ratio of PSS to SSS		Config 1,2,3,4,5,6	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15k Hz	Config 1,2,3,4,5,6	-98		-98	
N_{oc}^{Note2}	dBm/SC S	Config 1,2,4,5	-98		-95	
		Config 3,6	-95		-95	
SS-RSRP ^{Note 3}	dBm/SC S	Config 1,2,4,5	-94	-94	-Infinity	-88
		Config 3,6	-91	-91	-Infinity	-88
$\hat{E}_s / I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s / N_{oc}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
I _o ^{Note3}	dBm/9.36 MHz	NR Config 1,2,4,5	-64.59	-64.59	-63.94	-56.15
	dBm/38.1 6MHz	NR Config 3,6	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4,5,6	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.						
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.						

Table A.10.4.2.10.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
-------	---------	---------	---------

	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.10.4.2.10.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.10.4.2.10.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_with_}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_with_}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2, the UE is required to report SSB time index.

$T_{\text{identify_inter_cca_with_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}} + T_{\text{SSB_time_index_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_time_index_inter_cca}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

For test 1, DRX cycle = 40 ms and for test 2, DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.3 L1-RSRP measurements for beam reporting

A.10.4.3.1 SSB based L1-RSRP measurement on PSCC when DRX is not used

A.10.4.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.10.4.3.1.1-1.

Table A.10.4.3.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.10.4.3.1.2 Test parameters

There are two cells in the test, E-UTRAN Pcell (Cell 1) and FR1 PSCell (Cell 2) which operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 are defined in A.3.7A.2. The test parameters for the Cell 2 are given in Table A.10.4.3.1.2-1 and Table A.10.4.3.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.10.4.3.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1,2		freq1
DL CCA model	1,2		As specified in A.3.20.2.1
UL CCA model	1,2		As specified in A.3.20.2.2
Duplex mode	1,2		TDD
TDD Configuration	1,2		TDDConf.1.1 CCA
BW _{channel}	1,2	MHz	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,2		SR.1.1 CCA
RMSI CORESET Reference Channel	1,2		CR.1.1 CCA
Dedicated CORESET Reference Channel	1,2		CCR.1.1 CCA
SSB configuration	1,2		SSB.3 CCA for semi-static channel access

			SSB.4 CCA for dynamic channel access
OCNG Patterns	1,2		OP.1
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1,2		DBT.1
TRS Configuration	1,2		TRS.1.2 TDD
DRX configuration	1,2		Off
reportConfigType	1,2		periodic
reportQuantity	1,2		ssb-Index-RSRP
Number of reported RS	1,2		2
L1-RSRP reporting period	1,2	slot	80
T1	1,2	s	5
T2	1,2	s	1
EPRE ratio of PSS to SSS	1,2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1,2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table A.10.4.3.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} ^{Note 4,6}	1,2		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} ^{Note 4,7}	1,2		0.75/0.7 5	0.75/0.7 5	0.75/0.7 5	0.75/0.7 5
UL CCA probability P_{CCA_UL}	1,2		1.0	1.0	1.0	1.0
N_{oc} ^{Note2}	1,2	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1,2	dBm/SSB SCS	-91.65			
$\hat{E}_s/I_{ot}$	1,2	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1,2	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65

I_o ^{Note3}	1,2	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1,2	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy. Note 5: The signal levels apply for SSS Res when the discovery burst is transmitted during DBT windows. Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.						

A.10.4.3.1.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.3.2 SSB based L1-RSRP measurement on PSCC when DRX is used

A.10.4.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.10.4.3.1.1-1.

Table A.10.4.3.2.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.10.4.3.2.2 Test parameters

There are two cells in the test, E-UTRAN Pcell (Cell 1) and FR1 PSCell (Cell 2) which operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 are defined in A.3.7A.2. The test parameters for the Cell 2 are given in Table A.10.4.3.2.2-1 and Table A.10.4.3.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.10.4.3.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1,2		freq1
DL CCA model	1,2		As specified in A.3.20.2.1
UL CCA model	1,2		As specified in A.3.20.2.2
Duplex mode	1,2		TDD
TDD Configuration	1,2		TDDConf.1.1 CCA
BW _{channel}	1,2	MHz	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,2		SR.1.1 CCA
RMSI CORESET Reference Channel	1,2		CR.1.1 CCA
Dedicated CORESET Reference Channel	1,2		CCR.1.1 CCA
SSB configuration	1,2		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1,2		OP.1
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1,2		DBT.1
TRS Configuration	1,2		TRS.1.2 TDD
DRX configuration	1,2		DRX.3
reportConfigType	1,2		periodic
reportQuantity	1,2		ssb-Index-RSRP
Number of reported RS	1,2		2
L1-RSRP reporting period	1,2	slot	80
T1	1,2	s	5
T2	1,2	s	1
EPRE ratio of PSS to SSS	1,2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			

EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1,2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table A.10.4.3.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} ^{Note 4,6}	1,2		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} ^{Note 4,7}	1,2		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1,2		1.0	1.0	1.0	1.0
N_{oc} ^{Note2}	1,2	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1,2	dBm/SSB SCS	-91.65			
$\hat{E}_s/I_{ot}$	1,2	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1,2	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1,2	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s/N_{oc}$	1,2	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy. Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows. Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.						

A.10.4.3.2.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.3.3 SSB based L1-RSRP measurement on SCC when DRX is not used

A.10.4.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.10.4.3.1.1-1.

Table A.10.4.3.3.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.10.4.3.3.2 Test parameters

There are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2), and FR1 SCell (Cell 3). Cell 2 and Cell 3 operate on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 are defined in A.3.7A.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.10.4.3.3.2-1 and Table A.10.4.3.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.10.4.3.3.2-1: General test parameters

Parameter	Config	Unit	Value
Active PSCell	1,2		Cell 2
Active SCell	1,2		Cell 3
RF Channel Number	1,2		1: Cell 2 2: Cell 3
DL CCA model	1,2		As specified in A.3.20.2.1

UL CCA model	1,2		As specified in A.3.20.2.2
Duplex mode	1,2		TDD
TDD Configuration	1,2		TDDConf.1.1 CCA
BW _{channel}	1,2	MHz	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,2		SR.1.1 CCA
RMSI CORESET Reference Channel	1,2		CR.1.1 CCA
Dedicated CORESET Reference Channel	1,2		CCR.1.1 CCA
SSB configuration	1,2		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1,2		OP.1
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1,2		DBT.1
TRS Configuration	1,2		TRS.1.2 TDD
DRX configuration	1,2		Off
reportConfigType	1,2		periodic
reportQuantity	1,2		ssb-Index-RSRP
Number of reported RS	1,2		2
L1-RSRP reporting period	1,2	slot	80
T1	1,2	s	5
T2	1,2	s	1
EPRE ratio of PSS to SSS	1,2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1,2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table A.10.4.3.3.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2

DL CCA Probability $P_{\text{CCA_DL}}$ Note 4.6	1, 2		0.9375	0.9375	0.9375	0.9375
DL CCA Probability $P_{\text{CCA_DL}}$ Note 4.7	1, 2		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability $P_{\text{CCA_UL}}$	1, 2		1.0	1.0	1.0	1.0
N_{oc} Note2	1, 2	dBm/15kHz	-94.65			
N_{oc} Note2	1, 2	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1, 2	dB	0	0	-Infinity	3
SSB RSRP Note3	1, 2	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
I_o Note3	1, 2	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1, 2	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy. Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows. Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds $P_{\text{CCA_DL1}}$ and the second value corresponds to the $P_{\text{CCA_DL2}}$.						

A.10.4.3.3.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 3.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.3.4 SSB based L1-RSRP measurement on SCC when DRX is used

A.10.4.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.10.4.3.4.1-1.

Table A.10.4.3.4.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.10.4.3.4.2 Test parameters

There are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2), and FR1 SCell (Cell 3). Cell 2 and Cell 3 operate on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 are defined in A.3.7A.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.10.4.3.4.2-1 and Table A.10.4.3.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.10.4.3.4.2-1: General test parameters

Parameter	Config	Unit	Value
Active PSCell	1,2		Cell 2
Active SCell	1,2		Cell 3
RF Channel Number	1,2		1: Cell 2 2: Cell 3
DL CCA model	1,2		As specified in A.3.20.2.1
UL CCA model	1,2		As specified in A.3.20.2.2
Duplex mode	1,2		TDD
TDD Configuration	1,2		TDDConf.1.1 CCA
BW _{channel}	1,2	MHz	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1,2		SR.1.1 CCA
RMSI CORESET Reference Channel	1,2		CR.1.1 CCA
Dedicated CORESET Reference Channel	1,2		CCR.1.1 CCA
SSB configuration	1,2		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1,2		OP.1
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.1 ULBWP.1.1

DBT Window Configuration	1,2		DBT.1
TRS Configuration	1,2		TRS.1.2 TDD
DRX configuration	1,2		DRX.3
reportConfigType	1,2		periodic
reportQuantity	1,2		ssb-Index-RSRP
Number of reported RS	1,2		2
L1-RSRP reporting period	1,2	slot	80
T1	1,2	s	5
T2	1,2	s	1
EPRE ratio of PSS to SSS	1,2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1,2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table A.10.4.3.4.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} ^{Note 4,6}	1, 2		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} ^{Note 4.7}	1, 2		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1, 2		1.0	1.0	1.0	1.0
N_{oc} ^{Note2}	1, 2	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1, 2	dBm/SSB SCS	-91.65			
$\hat{E}_s/I_{ot}$	1, 2	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1, 2	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1, 2	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s/N_{oc}$	1, 2	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.
Note 5:	The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.
Note 6:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2} .

A.10.4.3.4.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 3.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.4 E-UTRAN–NR inter-RAT measurements on NR carrier frequency under CCA

A.10.4.4.1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

A.10.4.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21A of TS 36.133 [15] for E-UTRAN FDD-NR measurements under CCA and clause 8.1.2.4.22A of TS 36.133 [15] for E-UTRAN TDD-NR measurements under CCA.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters are given in Tables A.10.4.4.1.1-1, A.10.4.4.1.1-2, A.10.4.4.1.1-3 and A.10.4.4.1.1-4. Cell transmits SSBs in DBT windows according to DL CCA model.

In this test, measurement gap pattern configuration # 0 as defined in Table A.10.4.4.1.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.10.4.4.1.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
2	LTE TDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.10.4.4.1.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number			1, 2	1	One E-UTRA carrier frequency is used.
NR RF Channel Number			1, 2	1, 2	Two FR1 NR carrier frequency under CCA is used.
DL CCA model	Dynamic channel access Note 3, 5			As specified in clause A.3.26.2.1	
	Semi-static channel access Note 4, 5				
UL CCA model	Dynamic channel access Note 3, 5			As specified in clause A.3.26.2.2	
	Semi-static channel access Note 4, 5				
LCCA_DL			1, 2	12	
WCCA_DL		ms	1, 2	T _{PSS/SSS_sync_irat_cca}	
Active cell			1, 2	E-UTRA cell 1 (PCell) and NR cell 2 with CCA (PSCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell			1, 2	NR cell 3	NR cell 3 is on NR RF channel number 2.
Gap Pattern Id			1, 2	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset			1, 2	39	As specified in TS 36.331 [16].
b2-Threshold1		dBm	1, 2	Note 1	E-UTRA RSRP/RSRQ/SINR threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR		dBm	1, 2	Note 2	SS-RSRP/ SS-RSRQ/ SS-SINR threshold measurement on cell 3 for event B2 [16]
Hysteresis		dB	1, 2	0	
CP length			1, 2	Normal	
TimeToTrigger		s	1, 2	0	
Filter coefficient			1, 2	0	L3 filtering is not used

DRX		1, 2	OFF	DRX is not used
Time offset between serving and neighbour cells		1, 2	3μs	Synchronous cells.
T1	s	1, 2	5	
T2	s	1, 2	$\geq T_{\text{identify_irat_cca_without_index}}$	$T_{\text{identify_irat_cca_without_index}}$ is defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133
NOTE 1: The value of b2-Threshold1 is defined in Table A.10.4.4.1.1-3 NOTE 2: The value of b2-Threshold2NR is defined in Table A.10.4.4.1.1-4 NOTE 3: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 4: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 5: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.10.4.4.1.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration ^{Note1}		2	6	
TDD uplink-downlink configuration ^{Note1}		2	1	
BW _{channel}	MHz	1, 2	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				

PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2	-104	
Ê _s /N _{oc}	dB	1, 2	17	17
Ê _s /I _{ot} ^{Note5}	dB	1, 2	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2	-87	-87
I _o ^{Note5}	dBm/9MHz	1, 2	-59.13+10log (N _{RB,c} /50)	-59.13+10log (N _{RB,c} /50)
Propagation Condition ^{Note6}		1, 2	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2	1x2 Low	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5: Ê _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

Table A.10.4.4.1.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T2	T2
NR RF Channel Number		1, 2	2		3	
TDD configuration		1, 2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
P_{CCA_DL} for dynamic channel access ^{Note 6,8}		1, 2	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	
P_{CCA_DL} for semi-static channel access ^{Note 7,8}		1, 2	$P_{CCA_DL}=0.9375$		$P_{CCA_DL}=0.9375$	
P_{CCA_UL} for dynamic channel access ^{Note 6,8}		1, 2	1		1	
P_{CCA_UL} for semi-static channel access ^{Note 7,8}		1, 2	1		1	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1		OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1		SMTC.1	
DBT window configuration		1, 2	DBT.1		DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA		SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA		SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30		30	
b2-Threshold2NR	dBm	1, 2	NA		-98	
EPRE ratio of PSS to SSS		1, 2	0		0	

EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15kHz	1, 2	-98		-98	
N_{oc} ^{Note2}	dBm/SCS	1, 2	-95		-95	
SS-RSRP ^{Note 3,5}	dBm/SCS	1, 2	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$ ^{Note 5}	dB	1, 2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$ ^{Note 5}	dB	1, 2	4	4	-Infinity	7
I_o ^{Note3}	dBm/38.16MHz	1, 2	-58.49	-58.49	-63.95	-56.16
Propagation Condition		1, 2	AWGN		AWGN	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low		1x2 Low	
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.						
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
NOTE 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.						
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.						
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.						

A.10.4.4.1.2 Test Requirements

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_irat_cca_without_index}}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index. $T_{\text{identify_irat_cca_without_index}}$ is defined in defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.4.2 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used

A.10.4.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters are given in Tables A.10.4.4.2.1-1, A.10.4.4.2.1-2, A.10.4.4.2.1-3 and A.10.4.4.2.1-4. Cell transmits SSBs in DBT windows according to DL CCA model.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.10.4.4.2.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.10.4.4.2.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
2	LTE TDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.10.4.4.2.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Value		Comment
				Test 1	Test 2	
E-UTRA RF Channel Number			1, 2	1		One E-UTRA carrier frequency is used.
NR RF Channel Number			1, 2	1, 2		Two FR1 NR carrier frequency under CCA is used.
Active cell			1, 2	E-UTRA cell 1 (PCell) and NR cell 2 with CCA (PSCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
DL CCA model	Dynamic channel access ^{Note 3, 5}			As specified in clause A.3.26.2.1		
	Semi-static channel access ^{Note 4, 5}					
UL CCA model	Dynamic channel access ^{Note 3, 5}			As specified in clause A.3.26.2.2		

	Semi-static channel access Note 4, 5				
LCCA_DL			1, 2	12	5
WCCA_DL	ms		1, 2	T _{PSS/SSS_sync_irat_cca}	
Neighbour cell			1, 2	NR cell 3	
Gap Pattern Id			1, 2	0	
Measurement gap offset			1, 2	39	
b2-Threshold1	dBm		1, 2	Note 1	
b2-Threshold2NR	dBm		1, 2	Note 2	
Hysteresis	dB		1, 2	0	
CP length			1, 2	Normal	
TimeToTrigger	s		1, 2	0	
Filter coefficient			1, 2	0	
DRX			1, 2	DRX.9	DRX.12
Time offset between serving and neighbour cells			1, 2	3μs	
T1	s		1, 2	5	
T2	s		1, 2	≥T _{identify_irat_cca_without_index}	
NOTE 1: The value of b2-Threshold1 is defined in Table A.10.4.4.1.1-3					
NOTE 2: The value of b2-Threshold2NR is defined in Table A.10.4.4.1.1-4					
NOTE 3: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.					
NOTE 4: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.					
NOTE 5: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.					

Table A.10.4.4.2.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration ^{Note1}		2	6	
TDD uplink-downlink configuration ^{Note1}		2	1	
BW _{channel}	MHz	1, 2	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	

		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2	-104	
Ê _s /N _{oc}	dB	1, 2	17	17
Ê _s /I _{ot} ^{Note5}	dB	1, 2	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2	-87	-87
I _o ^{Note5}	dBm/9MHz	1, 2	-59.13+10log (N _{RB,C} /50)	-59.13+10log (N _{RB,C} /50)
Propagation Condition ^{Note6}		1, 2	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2	1x2 Low	
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].			
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.			
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 5:	Ê _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 6:	Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].			

Table A.10.4.4.2.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		1, 2	2		3	
TDD configuration		1, 2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
P_{CCA_DL} for dynamic channel access ^{Note 6,8}		1, 2	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	
P_{CCA_DL} for semi-static channel access ^{Note 7,8}		1, 2	$P_{CCA_DL}=0.9375$		$P_{CCA_DL}=0.9375$	

$P_{\text{CCA_UL}}$ for dynamic channel access Note 6,8		1, 2	1	1		
$P_{\text{CCA_UL}}$ for semi-static channel access Note 7,8		1, 2	1	1		
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1	OP.1		
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1	SMTC.1		
DBT window configuration		1, 2	DBT.1	DBT.1		
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	SSB.1 CCA		
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	SSB.2 CCA		
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	30		
b2-Threshold2NR	dBm	1, 2	NA	-98 for SS-RSRP		
EPRE ratio of PSS to SSS		1, 2	0	0		
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	1, 2	-98	-98		
N_{oc} Note2	dBm/SCS	1, 2	-95	-95		
SS-RSRP Note 3,5	dBm/SCS	1, 2	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	4	4	-Infinity	7
I_o Note3	dBm/38.16MHz	1, 2	-58.49	-58.49	-63.95	-56.16
Propagation Condition		1, 2	AWGN		AWGN	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low		1x2 Low	
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.						
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
NOTE 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.						
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.						
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.						

A.10.4.4.2.2 Test Requirements

In test, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_irat_cca_without_index}}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_irat_cca_without_index}}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1 and 2, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.4.3 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

A.10.4.4.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters are given in Tables A.10.4.4.3.1-1, A.10.4.4.3.1-2, A.10.4.4.3.1-3 and A.10.4.4.3.1-4. Cell transmits SSBs in DBT windows according to DL CCA model.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.10.4.4.3.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.10.4.4.3.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR1

Configuration	Description
1	LTE FDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
2	LTE TDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.10.4.4.3.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		1, 2	1	One E-UTRA carrier frequency is used.

NR RF Chanel Number			1, 2	1,2	Two FR1 NR carrier frequency under CCA is used.
DL CCA model	Dynamic channel access ^{Note 3, 5}			As specified in clause A.3.26.2.1	
	Semi-static channel access ^{Note 4, 5}				
UL CCA model	Dynamic channel access ^{Note 3, 5}			As specified in clause A.3.26.2.2	
	Semi-static channel access ^{Note 4, 5}				
L _{CCA_DL}			1, 2	12	
W _{CCA_DL}		ms	1, 2	T _{PSS/SSS_sync_irat_cca}	
Active cell			1, 2	E-UTRA cell 1 (PCell) and NR cell 2 with CCA (PSCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell			1, 2	NR cell 3	NR cell 3 is on NR RF channel number 2.
Gap Pattern Id			1, 2	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset			1, 2	39	As specified in TS 36.331 [16].
b2-Threshold1		dBm	1, 2	Note 1	E-UTRA RSRP threshold for measurement on cell 1 for event B2 [16]
b2-Threshold2NR		dBm	1, 2	Note 2	SS-RSRP threshold measurement on cell 3 for event B2 [16]
Hysteresis		dB	1, 2	0	
CP length			1, 2	Normal	
TimeToTrigger		s	1, 2	0	
Filter coefficient			1, 2	0	L3 filtering is not used
DRX			1, 2	OFF	DRX is not used
Time offset between serving and neighbour cells			1, 2	3μs	Synchronous cells.
T1		s	1, 2	5	
T2		s	1, 2	≥ T _{identify_irat_cca_with_index}	T _{identify_irat_cca_with_index} is defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133
NOTE 1: The value of b2-Threshold1 is defined in Table A.10.4.4.3.1-3 NOTE 2: The value of b2-Threshold2NR is defined in Table A.10.4.4.3.1-4 NOTE 3: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 4: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 5: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.					

Table A.10.4.4.3.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 with SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	

Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration ^{Note1}		2	6	
TDD uplink-downlink configuration ^{Note1}		2	1	
BW _{channel}	MHz	1, 2	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$ ^{Note5}	dB	1, 2	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2	-87	-87
I ₀ ^{Note5}	dBm/9MHz	1, 2	-59.13+10log (N _{RB,c} /50)	-59.13+10log (N _{RB,c} /50)
Propagation Condition ^{Note6}		1, 2	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2	1x2 Low	
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].			
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.			
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			

- Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
- Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.10.4.4.3.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		1, 2	2		3	
TDD configuration		1, 2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,C} = 106$		40: $N_{RB,C} = 106$	
P_{CCA_DL} for dynamic channel access Note 6,8		1, 2	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	
P_{CCA_DL} for semi-static channel access Note 7,8		1, 2	$P_{CCA_DL}=0.9375$		$P_{CCA_DL}=0.9375$	
P_{CCA_UL} for dynamic channel access Note 6,8		1, 2	1		1	
P_{CCA_UL} for semi-static channel access Note 7,8		1, 2	1		1	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1		OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1		SMTC.1	
DBT window configuration		1, 2	DBT.1		DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA		SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA		SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30		30	
b2-Threshold2NR	dBm	1, 2	NA		-98	
EPRE ratio of PSS to SSS		1, 2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	dBm/15kHz	1, 2	-98		-98	
N_{oc} Note2	dBm/SCS	1, 2	-95		-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	4	4	-Infinity	7

Io ^{Note3}	dBm/38.16MHz	1, 2	-58.49	-58.49	-63.95	-56.16
Propagation Condition		1, 2	AWGN		AWGN	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low		1x2 Low	
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.						
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.						
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.						
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.						

A.10.4.4.3.2 Test Requirements

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_irat_cca_with_index}}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.4.4.4 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used

A.10.4.4.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are three cells: LTE cell 1 as PCell on E-UTRA RF channel 1, NR cell 2 as PSCell in FR1 with CCA on NR RF channel 1 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters are given in Tables A.10.4.4.4.1-1, A.10.4.4.4.1-2, A.10.4.4.4.1-3 and A.10.4.4.4.1-4. Cell transmits SSBs in DBT windows according to DL CCA model.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.10.4.4.4.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.10.4.4.4.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR1

Configuration	Description
1	LTE FDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD

2	LTE TDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.10.4.4.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection

Parameter		Unit	Test configuration	Value		Comment
				Test 1	Test 2	
E-UTRA RF Channel Number			1, 2	1		One E-UTRA carrier frequency is used.
NR RF Channel Number			1, 2	1,2		Two FR1 NR carrier frequency under CCA is used.
DL CCA model	Dynamic channel access Note 3, 5			As specified in clause A.3.26.2.1		
	Semi-static channel access Note 4, 5					
UL CCA model	Dynamic channel access Note 3, 5			As specified in clause A.3.26.2.2		
	Semi-static channel access Note 4, 5					
Active cell			1, 2	E-UTRA cell 1 (PCell) and NR cell 2 with CCA (PSCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
L _{CCA_DL}			1, 2	12	5	
W _{CCA_DL}		ms	1, 2	T _{PSS/SSS_sync_irat_cca}		
Neighbour cell			1, 2	NR cell 3		NR cell 3 is on NR RF channel number 2.
Gap Pattern Id			1, 2	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset			1, 2	39		As specified in TS 36.331 [16].
b2-Threshold1		dBm	1, 2	Note 1		E-UTRA RSRP/RSRQ/SINR threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR		dBm	1, 2	Note 2		SS-RSRP/ SS-RSRQ/ SS-SINR threshold measurement on cell 3 for event B2 [16]
Hysteresis		dB	1, 2	0		
CP length			1, 2	Normal		
TimeToTrigger		s	1, 2	0		
Filter coefficient			1, 2	0		L3 filtering is not used
DRX			1, 2	DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells			1, 2	3μs		Synchronous cells.
T1		s	1, 2	5		

T2	s	1, 2	$\geq T_{\text{identify_irat_cca_with_index}}$	$T_{\text{identify_irat_cca_with_index}}$ is defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133
NOTE 1: The value of b2-Threshold1 is defined in Table A.10.4.4.4.1-3 NOTE 2: The value of b2-Threshold2NR is defined in Table A.10.4.4.4.1-4 NOTE 3: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 4: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 5: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.10.4.4.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 with SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration ^{Note1}		2	6	
TDD uplink-downlink configuration ^{Note1}		2	1	
BW _{channel}	MHz	1, 2	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				

OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$ ^{Note5}	dB	1, 2	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2	-87	-87
I _o ^{Note5}	dBm/9MHz	1, 2	-59.13+10log (N _{RB,C} /50)	-59.13+10log (N _{RB,C} /50)
Propagation Condition ^{Note6}		1, 2	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2	1x2 Low	
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].			
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.			
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 5:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 6:	Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].			

Table A.10.4.4.4.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Cell 2		Cell 3	
			T1	T2	T1	T2
NR RF Channel Number		1, 2	2		3	
TDD configuration		1, 2	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
BW _{channel}	MHz	1, 2	40: N _{RB,c} = 106		40: N _{RB,c} = 106	
P _{CCA_DL} for dynamic channel access ^{Note 6,8}		1, 2	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75		P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75	
P _{CCA_DL} for semi-static channel access ^{Note 7,8}		1, 2	P _{CCA_DL} =0.9375		P _{CCA_DL} =0.9375	
P _{CCA_UL} for dynamic channel access ^{Note 6,8}		1, 2	1		1	
P _{CCA_UL} for semi-static channel access ^{Note 7,8}		1, 2	1		1	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1		OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1		SMTC.1	
DBT window configuration		1, 2	DBT.1		DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA		SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA		SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30		30	
b2-Threshold2NR	dBm	1, 2	NA		-98	
EPRE ratio of PSS to SSS		1, 2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						

EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15kHz	1, 2	-98		-98	
N_{oc} ^{Note2}	dBm/SCS	1, 2	-95		-95	
SS-RSRP ^{Note 3,5}	dBm/SCS	1, 2	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$ ^{Note 5}	dB	1, 2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$ ^{Note 5}	dB	1, 2	4	4	-Infinity	7
I_o ^{Note3}	dBm/38.16MHz	1, 2	-58.49	-58.49	-63.95	-56.16
Propagation Condition		1, 2	AWGN		AWGN	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low		1x2 Low	
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.						
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
NOTE 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.						

A.10.4.4.4.2 Test Requirements

In test 1, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_irat_cca_with_index}}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_irat_cca_with_index}}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1 and 2, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.10.5 Measurement performance

A.10.5.1 SS-RSRP

A.10.5.1.1 Intra-frequency measurement accuracy on a CCA serving cell

A.10.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.36.1.1 and 10.1.36.1.2 when the serving cell is subject to CCA.

A.10.5.1.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell under CCA (Cell 2). Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. Supported test configurations are shown in Table A.10.5.1.1.1-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in Table A.10.5.1.1.1-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7A.2.1. In all test cases, Cell 2 is the PSCell, and Cell 3 is the target cell.

Table A.10.5.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Config	Description
1	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Table A.10.5.1.1.2-2: SS-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
Physical cell ID			489	0	489	0
SSB ARFCN			freq1			
Duplex mode	Config 1, 2		TDD			
TDD configuration	Config 1, 2		TDDConf.1.1 CCA			
BW _{channel}	Config 1, 2	MHz	40: N _{RB,c} = 106			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
TRS configuration	Config 1, 2		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1, 2		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 CCA		CR.1.1 CCA	
Control Channel RMC	Config 1, 2		CCR.1.1 CCA		CCR.1.1 CCA	
DL CCA model			As specified in clause A.3.26.2.1			
UL CCA model			As specified in clause A.3.26.2.2			
P _{CCA_DL} for dynamic channel access ^{Note 7,8}	Config 1, 2		P _{CCA_DL1} =0.75 P _{CCA_DL2} =0.75	P _{CCA_DL1} =0.75 P _{CCA_DL2} =0.75	P _{CCA_DL1} =0.75 P _{CCA_DL2} =0.75	P _{CCA_DL1} =0.75 P _{CCA_DL2} =0.75
P _{CCA_DL} for semi-static channel access ^{Note 6.8}	Config 1, 2		P _{CCA_DL} =0.937 5	P _{CCA_DL} =0.937 5	P _{CCA_DL} =0.937 5	P _{CCA_DL} =0.937 5
P _{CCA_UL}	Config 1, 2		1	1	1	1
SSB configuration	Semi-static channel access Config 1, 2		SSB.1 CCA (As defined in A.3.10A)	SSB.1 CCA (As defined in A.3.10A)	SSB.1 CCA (As defined in A.3.10A)	SSB.1 CCA (As defined in A.3.10A)

	Dynam ic channel access			SSB.2 CCA (As defined in A.3.10A)	SSB.2 CCA (As defined in A.3.10A)	SSB.2 CCA (As defined in A.3.10A)	SSB.2 CCA (As defined in A.3.10A)
Time offset with Cell 2		Config 1, 2	μs	-	3	-	3
SMTC configuration		Config 1, 2		SMTC.1			
DBT Window Configuration		Config 1, 2		As defined in A.3.28.1			
DL CCA model		Config 1, 2		As specified in clause A.3.26.2.1			
UL CCA model		Config 1, 2		As specified in clause A.3.26.2.2			
OCNG Patterns				OP.1			
PDSCH/PDCCH subcarrier spacing		Config 1, 2	kHz	30kHz			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}	Config 1, 2	NR_CCA_FR1_I	dBm/15KHz	-94		-110	
		NR_CCA_FR1_J				-109.5	
N_{oc}^{Note2}	Config 1, 2	NR_CCA_FR1_I	dBm/SCS	-91		-107.0	
		NR_CCA_FR1_J				-106.5	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	-2.01	-3.54
$\hat{E}_s/N_{oc}$			dB	6	1	1	0
SS-RSRP ^{Note3}	Config 1, 2	NR_CCA_FR1_I	dBm/SCS	-85	-90	-106.00	-107.00
		NR_CCA_FR1_J				-105.50	-106.50
I_o^{Note3}	Config 1, 2	NR_CCA_FR1_I	dBm/38.16MHz	-51.99		-70.82	
		NR_CCA_FR1_J				-70.32	
Propagation condition			-	AWGN			

Antenna configuration	1x2
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
Note 6:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 7:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 8:	For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.10.5.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for cell 2 and cell 3 shall fulfil absolute requirement in clause 10.1.2.1.1 and relative requirement in clause 10.1.36.1.1 and 10.1.36.1.2.

A.10.5.1.2 Inter-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell

A.10.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.37.1.1 and 10.1.37.1.2 for inter-frequency measurements with the testing configurations in Table A.10.5.1.2.1-1.

Table A.10.5.1.2.1-1: Applicable NR configurations for FR1 inter-frequency SS-RSRP accuracy test

Config	Description
1	LTE FDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations on each supported band

A.10.5.1.2.2 Test parameters

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on a different frequency than the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7A.2.1. The test parameters for the Cell 2 and Cell 3 are given in Table A.10.5.1.2.2-1 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.10.5.1.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.10.5.1.2.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN	1, 2		freq1	freq2	freq1	freq2
BW _{channel}	1, 2	MHz	40: N _{RB,C} = 106		40: N _{RB,C} = 106	
Gap pattern ID			0		0	
Duplex mode	1, 2		TDD		TDD	
TDD configuration	1, 2		TDDConf.1.1 CCA		TDDConf.1.1 CCA	

PDSCH Reference measurement channel		1, 2		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel		1, 2		CR.1.1 CCA	-	CR.1.1 CCA	-
Dedicated CORESET Reference Channel		1, 2		CCR.1.1 CCA	-	CCR.1.1 CCA	-
SSB configuration	Semi-static channel access	1, 2		SSB.1 CCA (As defined in A.3.10A)		SSB.1 CCA (As defined in A.3.10A)	
	Dynamic channel access			SSB.2 CCA (As defined in A.3.10A)		SSB.2 CCA (As defined in A.3.10A)	
OCNG Patterns		1, 2		OP.1		OP.1	
TRS configuration		1, 2		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration		1, 2		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration		1, 2		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 2		1, 2	μs	-	3	-	3
SMTC configuration		1, 2		SMTC.1		SMTC.1	
DBT Window Configuration		1, 2		DBT.1 (As defined in A.3.28.1)		DBT.1 (As defined in A.3.28.1)	
DL CCA model				As specified in clause A.3.26.2.1			
UL CCA model				As specified in clause A.3.26.2.2			
EPRE ratio of PSS to SSS		1, 2	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH DMRS							
EPRE ratio of OCNG DMRS to SSS ^{Note 1}							
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}							
N_{oc} ^{Note2}	NR_CCA_FR1_I	1, 2	dBm/15kHz	-94.65		(N_{oc} for Cell 3 +8dB)	-111
	NR_CCA_FR1_J						-110.5
N_{oc} ^{Note2}	NR_CCA_FR1_I	1, 2	dBm/SSB SCS	-91.65		(N_{oc} for C 3 +8dB)	-109.00
	NR_CCA_FR1_J						-108.50
$\hat{E}_s/I_{ot}$		1, 2	dB	10	10	13	-3
SS-RSRP ^{Note3}	NR_CCA_FR1_I	1, 2	dBm/SCS	-81.65		(RSRP for Cell 3 +24dB)	-111.00
	NR_CCA_FR1_J						-110.50

Io ^{Note3}	R_CCA_FR1_I	1, 2	dBm/ 38.16MHz	-50.19		(Io for Channel 3 +19.45dB)	-75.19
	NR_CCA_FR1_J						-74.69
$\hat{E}_s / N_{oc}$		1, 2	dB	10	10	13	-3
Propagation condition		1, 2	-	AWGN		AWGN	
Antenna configuration				1x2		1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 5: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.							

A.10.5.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 2 and Cell 3 shall fulfil the Absolute requirement in clause 10.1.4.1.1 and Relative requirement in clause 10.1.37.1.1 and 10.1.37.1.2.

A.10.5.2 SS-RSRQ

A.10.5.2.1 Intra-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell

A.10.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.29.1.1.

A.10.5.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.10.5.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is test by using the parameters in Table A.10.5.2.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7A.2.1. In all test cases, Cell 2 is the PSCell and Cell 3 is the target cell.

Table A.10.5.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	LTE FDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.10.5.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter	Unit	Test 1	Test 3
-----------	------	--------	--------

			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1			
Duplex mode	Config 1, 2		TDD			
TDD configuration	Config 1, 2		TDDConf.1.1 CCA			
BW _{channel}	Config 1, 2		MHz	40: N _{RB,c} = 106		
BWP configuration	Initial DL BWP			DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
DRX Cycle			ms	Not Applicable		
PDSCH Reference measurement channel	Config 1, 2		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 CCA		CR.1.1 CCA	
Control Channel RMC	Config 1, 2		CCR.1.1 CCA		CCR.1.1 CCA	
TRS configuration	Config 1, 2		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OP. 1			
SS-RSSI-Measurement			Not Applicable			
Time offset with Cell 2	Config 1, 2		μs	-	3	- 3
SMTC configuration	Config 1, 2		SMTC.1			
SSB configuration	Semi-static channel access	Config 1, 2	SSB.1 CCA (As defined in A.3.10A)			
	Dynamic channel access		SSB.2 CCA (As defined in A.3.10A)			
PDSCH/PDCCH subcarrier spacing	Config 1, 2		kHz	30kHz		
DBT Window Configuration	Config 1, 2		DBT.1 (As defined in A.3.28.1)			
DL CCA model	Config 1, 2		As specified in clause A.3.26.2.1			
UL CCA model	Config 1, 2		As specified in clause A.3.26.2.2			
EPRE ratio of PSS to SSS			dB	0	0	0 0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	Config1, 2	NR_CCA_FR1_I	Bm/15kHz	-91	-110	
		NR_CCA_FR1_J			-109.5	
N_{oc}^{Note2}	Config 1, 2	NR_CCA_FR1_I	dBm/SC S	-88	-107	
		NR_CCA_FR1_J			-106.5	
$\hat{E}_s / I_{ot}$			dB	-1.76	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	3	3	-4 -4
SS-RSRP ^{Note3}	Config 1, 2	NR_CCA_FR1_I	dBm/SCS	-85	-85	-111 -111
		NR_CCA_FR1_J				-110.5 -110.5
SS-RSRQ ^{Note3}		NR_CCA_FR1_I	dB	-14.77	-14.77	-17.34 -17.34
		NR_CCA_FR1_J				

Io ^{Note3}	Config 1, 2	NR_CCA_FR1_I	dBm/ 38.16MHz	-50			-73.4
		NR_CCA_FR1_J					-72.9
Propagation condition			-	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3:	SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4:	SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5:	NR operating band groups are as defined in Clause 3.5.2.						
Note 6:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.						

A.10.5.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.29.1.1.

A.10.5.2.2 Inter-frequency measurement accuracy with FR1 CCA serving cell and FR1 CCA target cell

A.10.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.30.1.1 and 10.1.30.1.2 for inter-frequency measurements with the testing configurations in Table A.10.5.2.2.2-1.

A.10.5.2.2.2 Test Parameters

In this set of test cases there are three cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell (Cell 2) and a FR1 neighbour cell (Cell 3) on a different frequency than the PSCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 2 and Cell 3 are given in Table A.4.7.1.2.2-1 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.10.5.2.2.2-2. The inter-frequency measurements are supported by a measurement gap.

Table A.10.5.2.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Config	Description
1	LTE FDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.10.5.2.2.2-2: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1, 2		TDD					
TDD configuration	Config 1, 2		TDDConf.1.1 CCA					
BW _{channel}	Config 1, 2		40: N _{RB,C} = 106					

BWP BW		Config 1, 2	MHz	40: N _{RB,c} = 106					
Gap pattern ID				0					
DRX Cycle			ms	Not Applicable					
PDSCH Reference measurement channel		Config 1, 2		SR.1.1 CCA		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel		Config 1, 2		CR.1.1 CCA		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel		Config 1, 2		CCR.1.1 CCA		CCR.1.1 CCA		CCR.1.1 CCA	
TRS configuration		Config 1, 2		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns				OCNG pattern 1					
Time offset with Cell 2		Config 1, 2	µs	-	3	-	3	-	3
SMT-C configuration		Config 1, 2		SMT-C.1					
SSB configuration	Semi-static channel access	Config 1, 2		SSB.1 CCA (As defined in A.3.10A)					
	Dynamic channel access			SSB.2 CCA (As defined in A.3.10A)					
DBT Window Configuration		Config 1, 2		DBT.1 (As defined in A.3.28.1)					
DL CCA model		Config 1, 2		As specified in clause A.3.26.2.1					
UL CCA model		Config 1, 2		As specified in clause A.3.26.2.2					
PDSCH/PDCCH subcarrier spacing		Config 1, 2	kHz	30 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N _{oc} ^{Note2}	Config 1, 2	NR_CCA_FR1_I	dBm/15kHz	-86.27	-86.27	-113	-113	-112	-112
		NR_CCA_FR1_J						-111.5	-111.5
N _{oc} ^{Note2}	Config 1, 2	NR_CCA_FR1_I	dBm/SCS	-83.27	-83.27	-110	-110	-109	-109
		NR_CCA_FR1_J						-108.5	-108.5
Ê _s /I _{ot}			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75
Ê _s /N _{oc}			dB	-1.75	-1.75	-1.75	-1.75	3	-1.75
SS-RSRP ^{Note3}	Config 1, 2	NR_CCA_FR1_I	dBm/SCS	-85.02	-85.02	-111.75	-111.75	-106	-110.75
		NR_CCA_FR1_J						-105.5	-110.25
SS-RSRQ ^{Note3}		NR_CCA_FR1_I NR_CCA_FR1_J	dB	-14.77	-14.77	-40.59	-40.59	-12.56	-14.76
I _o ^{Note3}	Config 1, 2	NR_CCA_FR1_I	dBm/ 38.16MHz	-50	-50	-76.73	-76.73	-73.19	-75.23
		NR_CCA_FR1_J						-72.69	-74.73

Propagation condition		AWGN	AWG N	AWGN	AWG N	AWGN	AWG N
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3:	SS-RSRQ, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4:	SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5:	NR operating band groups are as defined in Section 3.5.2.						
Note 6:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.						

A.10.5.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.30.1.1 and 10.1.30.1.2.

A.10.5.3 SS-SINR

A.10.5.3.1 Intra-frequency measurement accuracy on PSCC

A.10.5.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.31.1.

A.10.5.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.10.5.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.10.5.3.1.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7A.2.1. In all test cases, Cell 2 is the PSCell with CCA and Cell 3 is the target cell with CCA. Two sub-tests (Test 1 and Test 2) are provided different N_{oc} on Cells 2 and 3.

Table A.10.5.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	LTE FDD NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.10.5.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1		freq1	
DL CCA model	Config 1,2		As specified in clause A.3.26.2.1			
UL CCA model	Config 1,2		As specified in clause A.3.26.2.2			
UL CCA probability	P _{CCA_UL}		1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P _{CCA_DL}		0.9375	-	0.9375	-

DL CCA probability for dynamic channel access Note 8, 9		PCCA_DL_1		0.75	-	0.75	-
		PCCA_DL_2		0.75	-	0.75	-
Duplex mode		Config 1,2		TDD			
TDD configuration		Config 1,2		TDDConf.1.1 CCA			
Downlink initial BWP configuration				DLBWP.0.1			
Downlink dedicated BWP configuration				DLBWP.1.1			
Uplink initial BWP configuration				ULBWP.0.1			
Uplink dedicated BWP configuration				ULBWP.1.1			
DRX Cycle configuration			ms	Not Applicable			
TRS Configuration	Config 1,2			TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1,2			SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1,2			CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel	Config 1,2			CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns				OP.1			
SS-RSSI-Measurement				Not Applicable			
Time offset with Cell 2	Config 1,2	μs		-	3	-	3
DBT Window Configuration	Config 1,2			DBT.1			
SSB configuration	Config 1,2			SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration	Config 1,2			SMTC.1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz		30			
EPRE ratio of PSS to SSS		dB	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-93		-112	
						-111.5	
N_{oc} Note2	Config 1,2	NR_CCA_FR1_I	dBm/SCS	-90		-109	
		NR_CCA_FR1_J				-108.5	
$\hat{E}_s / I_{ot}$		dB	0	-3.19	-5.46	-5.46	
$\hat{E}_s / N_{oc}$		dB	4.54	2.66	-4	-4	
SS-RSRP Not e3	Config 1,2	NR_CCA_FR1_I	dBm/SCS	-85.46	-87.34	-113	-113
		NR_CCA_FR1_J				-112.5	-112.5
SS-SINR Note3		NR_CCA_FR1_I	dB	0	-3.19	-5.46	-5.46
		NR_CCA_FR1_J					
I_o Note3	Config 1,2	NR_CCA_FR1_I	dBm/38.16MHz	-51.41		-75.41	
		NR_CCA_FR1_J				-74.91	
Propagation condition		-	AWGN				
Antenna configuration		-	1x2				

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-SINR, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	NR operating band groups are as defined in Clause 3.5.2.
Note 6:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.
Note 7:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.10.5.3.1.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.31.1.1.

A.10.5.3.2 Inter-frequency measurement accuracy on PSCC

A.10.5.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.32.1.1 and 10.1.32.1.2 for inter-frequency measurement.

A.10.5.3.2.2 Test Parameters

In this test case the two NR cells (i.e., Cell 2 and Cell 3) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.10.5.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.10.5.3.2.2-2. In all test cases, Cell 2 is the PSCell with CCA and Cell 3 is target cell with CCA. Cell 1 is the E-UTRA cell of which specific test parameters for this test case are specified in Table A.3.7A.2.1-1. Three sub-tests (Test 1, Test 2 and Test 3) are provided different N_{oc} on Cells 2 and 3.

Table A.10.5.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

Config	Description
1	LTE FDD NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.10.5.3.2.2-2: SS-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
DL CCA model	Config 1,2		As specified in clause A.3.26.2.1					
UL CCA model	Config 1,2		As specified in clause A.3.26.2.2					
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-	1.0	-

DL CCA probability for semi-static channel access Note 7, 8	P _{CCA_DL}		0.9375	-	0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	P _{CCA_DL_1}		0.75	-	0.75	-	0.75	-
	P _{CCA_DL_2}		0.75	-	0.75	-	0.75	-
Duplex mode	Config 1,2		TDD					
TDD configuration	Config 1,2		TDDConf.1.1 CCA					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
Gap pattern ID			0	-	0	-	0	-
TRS configuration	Config 1,2		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1,2		SR.1.1 CCA		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 CCA		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 CCA		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns			OP.1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 2	Config 1,2	μs	-	3	-	3	-	3
DBT Window configuration	Config 1,2		DBT.1					
SSB configuration	Config 1,2		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access					
SMTC configuration	Config 1,2		SMTC.1					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	30					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2		NR_CCA_FR1_I	dBm/15k Hz	-88	-108.5	-115.5		
		NR_CCA_FR1_J				-116		
N_{oc} Note2	Config 1,2	NR_CCA_FR1_I	dBm/SC S	-85	-105.5	-112.5		
		NR_CCA_FR1_J				-113		
$\hat{E}_s/I_{ot}$			dB	-1.75	20	-4.0		
$\hat{E}_s/N_{oc}$			dB	-1.75	20	-4.0		
SS-RSRP ^{Not e3}	Config 1,2	NR_CCA_FR1_I		-86.75	-85.5	-116.5		
		NR_CCA_FR1_J				-116		
SS-SINR Note3		NR_CCA_FR1_I	dB	-1.75	20	-4.0		
		NR_CCA_FR1_J						

Io ^{Note3}	Config 1,2	NR_CCA_FR1_I	dBm/ 38.16MH z	-51.73	-54.41	-80
		NR_CCA_FR1_J				-79.5
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5:	NR operating band groups are as defined in Clause 3.5.2.					
Note 6:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration					
Note 7:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.					
Note 8:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.					
Note 9:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.					

A.10.5.3.2.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.32.1.1 and 10.1.32.1.2.

A.10.5.3.3 Intra-frequency measurement accuracy on SCC

A.10.5.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.31.1.

A.10.5.3.3.2 Test Parameters

In this test case, Cell2 (PSCell) is on frequency 1 while Cell 3 (SCell) and Cell 4 (target cell) which are intra-frequency neighbors, are on frequency 2 Supported test configuration are shown in Table A.10.5.3.3.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.10.5.3.3.2-2. The configuration of cell 1 (E-UTRA PCell) is specified in clause A.3.7A.2.1. In all test cases, Cell 2 is the PSCell with CCA, Cell 3 is the SCell with CCA, and Cell 4 is the target cell with CCA. Two sub-tests (Test 1 and Test 2) are provided different N_{oc} on Cells 2, 3 and 4.

Table A.10.5.3.3.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	LTE FDD NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.10.5.3.3.2-2: SS-SINR Intra frequency test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 2 / Cell 3	Cell 4	Cell 2 / Cell 3	Cell 4

SSB ARFCN			freq1 for Cell 2 freq2 for Cell 3	freq2	freq1 for Cell 2 freq2 for Cell 3	freq2
DL CCA model	Config 1,2		As specified in clause A.3.26.2.1			
UL CCA model	Config 1,2		As specified in clause A.3.26.2.2			
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-
Duplex mode	Config 1,2		TDD			
TDD configuration	Config 1,2		TDDConf.1.1 CCA			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS Configuration	Config 1,2		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1,2		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
Time offset with Cell 2	Config 1,2	μ s	3 (for Cell 3)	3	3 (for Cell 3)	3
DBT Window Configuration	Config 1,2		DBT.1			
SSB configuration	Config 1,2		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration	Config 1,2		SMTC.1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	30			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1) EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2	NR_CCA_FR1_I	dBm/15kHz	-93		-112	
	NR_CCA_FR1_J				-111.5	
N_{oc} Note2	Config 1,2	dBm/SCS	-90		-109	
	NR_CCA_FR1_J				-108.5	

$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
SS-RSRP ^{Not e3}	Config 1,2	NR_CCA_FR1_I	dBm/SCS	-85.46	-87.34	-113	-113
		NR_CCA_FR1_J				-112.5	-112.5
SS-SINR ^{Note3}		NR_CCA_FR1_I	dB	0	-3.19	-5.46	-5.46
		NR_CCA_FR1_J					
Io ^{Note3}	Config 1,2	NR_CCA_FR1_I	dB/ 38.16MHz	-51.41		-75.41	
		NR_CCA_FR1_J				-74.91	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 5: NR operating band groups are as defined in Clause 3.5.2.							
Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration							
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.							
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.							
Note 9: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.							

A.10.5.3.3.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.31.1.1.

A.10.5.4 L1-RSRP measurement for beam reporting with CCA serving cell

A.10.5.4.1 SSB based L1-RSRP measurement

A.10.5.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.33.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.10.5.4.1.1-1.

Table A.10.5.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	LTE FDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

A.10.5.4.1.2 Test parameters

In this set of test cases there are two cells in the test, E-UTRAN PCell (Cell 1), FR1 PSCell under CCA (Cell 2). Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model.

Two sub-tests (Test 1 and Test 2) are provided with different N_{oc} on Cell 2. The test parameters and applicability for Cell 1 are defined in A.3.7A.2. The test parameters for the Cell 2 are given in Table A.10.5.4.1.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.10.5.4.1.2-1.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.10.5.4.1.2-1: FR1 SSB based L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1,2		freq1	freq1
DL CCA model	1,2		As specified in A.3.26.2.1	As specified in A.3.26.2.1
UL CCA model	1,2		As specified in A.3.26.2.2	As specified in A.3.26.2.2
Duplex mode	1,2		TDD	TDD
TDD Configuration	1,2		TDDConf.1.1 CCA	TDDConf.1.1 CCA
$BW_{channel}$	1,2	MHz	40: $N_{RB,c} = 106$	40: $N_{RB,c} = 106$
Duplex mode	1,2		TDD	TDD
TDD configuration	1,2		TDDConf.1.1 CCA	TDDConf.1.1 CCA
PDSCH Reference measurement channel	1,2		SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel	1,2		CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel	1,2		CCR.1.1 CCA	CCR.1.1 CCA
SSB configuration for Semi-static channel access	1,2		SSB.3 CCA	SSB.3 CCA
SSB configuration for Dynamic channel access	1,2		SSB.4 CCA	SSB.4 CCA
OCNG Patterns	1,2		OP.1	OP.1
TRS configuration	1,2		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration	1,2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1,2		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1,2		DBT.1	DBT.1
reportConfigType	1,2		periodic	periodic
reportQuantity	1,2		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1,2		2	2
L1-RSRP reporting period	1,2		slot80	slot80
EPRE ratio of PSS to SSS	1,2	dB	0	0
EPRE ratio of PBCH DMRS to SSS	1,2			
EPRE ratio of PBCH to PBCH DMRS	1,2			

EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
N_{oc} ^{Note2}	NR_TDD_FR1_I	1,2	dBm/15kHz	-94.65	-113
N_{oc} ^{Note2}	NR_TDD_FR1_I	1,2	dBm/SCS	-91.65	-110
$\hat{E}_s / I_{ot}$		1,2	dB	10	-3
SS-RSRP ^{Note3}	NR_TDD_FR1_I	1,2	dBm/SCS	-81.65	-113
I_o ^{Note3}	NR_TDD_FR1_I	1,2	dBm/38.16MHz	-50.19	-77.19
$\hat{E}_s / N_{oc}$		1,2	dB	10	-3
Propagation condition		1,2		AWGN	AWGN
Antenna configuration		1,2		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification					

A.10.5.4.1.3 Test Requirements

In both Test 1 and Test 2, the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses 10.1.33.1.

A.10.5.5 RSSI

A.10.5.5.1 RSSI measurement accuracy on PSCC with CCA

A.10.5.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in Section 10.1.34.1.

A.10.5.5.1.2 Test parameters

In all test cases, Cell 1 is E-UTRAN PCell on a licensed band, and Cell 2 is PSCell operating on a carrier frequency under CCA. RSSI is measured on channel number 1. Supported test configurations are shown in table A.10.5.5.1.2-

1. The accuracy of RSSI intra-frequency measurements is tested by using the parameters in A.10.5.5.1.2-2 and A.10.5.5.1.2-3. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.5.5.1.2-1: RSSI supported test configurations

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.5.5.1.2-2: RSSI test parameters

Parameter		Configurations	Unit	Test 1 Cell 2
RF Channel Number				1
BW _{channel}			MHz	40
SSB configuration	Semi-static channel access ^{Note 1, 3}	1,2		SSB.1 CCA
	Dynamic channel access ^{Note 2, 3}	1,2		SSB.2 CCA
P _{CCA_DL}				0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
P _{CCA_UL}				0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model				As specified in A.3.26.2.1
UL CCA model				As specified in A.3.26.2.2
Measurement bandwidth			n_{PRE}	Same as channel access bandwidth
Channel access bandwidth			MHz	20
DRX Cycle configuration			ms	Not Applicable
PDSCH Reference measurement channel				SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA
OCNG Patterns				OP.1
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-87

$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-58.96
Propagation condition		-	AWGN
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.			
Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.			
Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.10.5.5.1.2-3: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.10.5.5.1.3 Test Requirements

The average RSSI measurement accuracy shall fulfil the requirements in sections 10.1.34.1. The nominal RSSI used to evaluate the requirement shall be based on Io in slots corresponding to RSSI measurement time configuration (RMTC).

A.10.5.5.2 RSSI measurement accuracy on SCC with CCA

A.10.5.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in Section 10.1.34.1.

A.10.5.5.2.2 Test parameters

In all test cases, Cell 1 is E-UTRAN PCell on a licensed band, Cell 2 is PSCell operating on a carrier frequency under CCA, Cell 3 is SCell on a carrier frequency under CCA. RSSI is measured on channel number 2. Supported test configurations are shown in table A.10.5.5.2.2-1. The accuracy of RSSI intra-frequency measurements is tested by using the parameters in A.10.5.5.2.2-2 and A.10.5.5.2.2-3. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.5.5.2.2-1: RSSI supported test configurations

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz

2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.5.5.2.2-2: RSSI test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 2	Cell 3
RF Channel Number				1	2
BW _{channel}			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2		SSB.2 CCA	SSB.2 CCA
P _{CCA_DL}				1	0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
P _{CCA_UL}				1	0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model				N/A	As specified in A.3.26.2.1
UL CCA model				N/A	As specified in A.3.26.2.2
Measurement bandwidth			n_{PRE}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-106

N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measB W	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measB W	-77.96	-58.96
Propagation condition		-	AWGN	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.10.5.5.2.2-3: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.10.5.5.2.3 Test Requirements

The average RSSI measurement accuracy shall fulfil the requirements in sections 10.1.34.1. The nominal RSSI used to evaluate the requirement shall be based on I_o in slots corresponding to RSSI measurement time configuration (RMTC).

A.10.5.5.3 Inter-frequency RSSI measurement accuracy on a carrier with CCA

A.10.5.5.3.1 Test Purpose and Environment

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in Section 10.1.34.2.

A.10.5.5.3.2 Test parameters

In all test cases, Cell 1 is E-UTRAN PCell on a licensed band, Cell 2 is PSCell operating on a carrier frequency under CCA, and Cell 3 is the neighbour with CCA. RSSI is measured on channel number 2. Supported test

configurations are shown in table A.10.5.5.3.2-1. The accuracy of RSSI inter-frequency measurements is tested by using the parameters in A.10.5.5.3.2-2 and A.10.5.5.3.2-3. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.5.5.3.2-1: RSSI supported test configurations

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.5.5.3.2-2: RSSI test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 2	Cell 3
RF Channel Number				1	2
BW _{channel}			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2		SSB.2 CCA	SSB.2 CCA
P _{CCA_DL}				1	0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
P _{CCA_UL}				1	0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model				N/A	As specified in A.3.26.2.1
UL CCA model				N/A	As specified in A.3.26.2.2
Measurement bandwidth			n_{PRE}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 TDD	NA
RMSI CORESET Reference Channel				CR.1.1 TDD	NA
Dedicated CORESET Reference Channel				CCR.1.1 TDD	NA
OCNG Patterns				OP.1	NA
EPRE ratio of PSS to SSS			dB	0	NA
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					

EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-58.96
Propagation condition		-	AWGN	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.10.5.5.3.2-3: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.10.5.5.3.3 Test Requirements

The average RSSI measurement accuracy shall fulfil the requirements in sections 10.1.34.2. The nominal RSSI used to evaluate the requirement shall be based on I_o in slots corresponding to RSSI measurement time configuration (RMTC).

A.10.5.6 Channel occupancy

A.10.5.6.1 Channel occupancy measurement accuracy on PSSC with CCA

A.10.5.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in Section 10.1.35.1.

A.10.5.6.1.2 Test parameters

In all test cases, Cell 1 is E-UTRAN PCell on a licensed band, and Cell 2 is PSCell operating on a carrier frequency under CCA. Channel occupancy is measured on channel number 1. Supported test configurations are shown in table A.10.5.6.1.2-1. The accuracy of channel occupancy intra-frequency measurements is tested by using the parameters in A.10.5.6.1.2-2 and A.10.5.6.1.2-3. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.5.6.1.2-1: CO supported test configurations

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.5.6.1.2-2: CO test parameters

Parameter		Configurations	Unit	Test 1 Cell 2
RF Channel Number				1
BW _{channel}			MHz	40
SSB configuration	Semi-static channel access ^{Note 1, 3}	1,2		SSB.1 CCA
	Dynamic channel access ^{Note 2, 3}	1,2		SSB.2 CCA
P _{CCA_DL}				0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
P _{CCA_UL}				0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model				As specified in A.3.26.2.1
UL CCA model				As specified in A.3.26.2.2
Measurement bandwidth			n_{PRE}	Same as channel access bandwidth
Channel access bandwidth			MHz	20
DRX Cycle configuration			ms	Not Applicable
PDSCH Reference measurement channel				SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA
OCNG Patterns				OP.1
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				

EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-58.96
Propagation condition		-	AWGN
channelOccupancyThreshold		dBm	-83
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.10.5.6.1.2-3: CO RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.10.5.6.1.3 Test Requirements

The nominal reported *channelOccupancy* shall be 100%. At least 90% of channel occupancy reports made by the UE shall indicate this value.

A.10.5.6.2 Channel occupancy measurement accuracy on SCC with CCA

A.10.5.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in Section 10.1.35.1.

A.10.5.6.2.2 Test parameters

In all test cases, Cell 1 is E-UTRAN PCell on a licensed band, Cell 2 is PSCell operating on a carrier frequency under CCA, Cell 3 is SCell on a carrier frequency under CCA. Channel occupancy is measured on channel number 2. Supported test configurations are shown in table A.10.5.6.2.2-1. The accuracy of channel occupancy intra-frequency measurements is tested by using the parameters in A.10.5.6.2.2-2 and A.10.5.6.2.2-3. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.5.6.2.2-1: CO supported test configurations

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.5.6.2.2-2: CO test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 2	Cell 3
RF Channel Number				1	2
BW _{channel}			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2		SSB.2 CCA	SSB.2 CCA
P _{CCA_DL}				1	0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
P _{CCA_UL}				1	0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model				N/A	As specified in A.3.26.2.1
UL CCA model				N/A	As specified in A.3.26.2.2
Measurement bandwidth			n_{PRE}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					

EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-58.96
Propagation condition		-	AWGN	
channelOccupancyThreshold		dBm	-83	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.10.5.6.2.2-3: CO RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.10.5.6.2.3 Test Requirements

The nominal reported *channelOccupancy* shall be 100%. At least 90% of channel occupancy reports made by the UE shall indicate this value.

A.10.5.6.3 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA

A.10.5.6.3.1 Test Purpose and Environment

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in Section 10.1.35.2.

A.10.5.6.3.2 Test parameters

In all test cases, Cell 1 is E-UTRAN PCell on a licensed band, Cell 2 is PSCell operating on a carrier frequency under CCA, and Cell 3 is the neighbour with CCA. Channel occupancy is measured on channel number 2. Supported test configurations are shown in table A.10.5.6.3.2-1. The accuracy of channel occupancy inter-frequency measurements is tested by using the parameters in A.10.5.6.3.2-2 and A.10.5.6.3.2-3. The E-UTRAN PCell setting refers to Table A.3.7.2.1-1.

Table A.10.5.6.3.2-1: CO supported test configurations

Configuration	Description
1	LTE FDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
2	LTE TDD; NR: TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz
NOTE: The UE is only required to pass in one of the supported test configurations above.	

Table A.10.5.5.3.2-2: CO test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 2	Cell 3
RF Channel Number				1	2
BW _{channel}			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2		SSB.2 CCA	SSB.2 CCA
P _{CCA_DL}				1	0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
P _{CCA_UL}				1	0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model				N/A	As specified in A.3.26.2.1
UL CCA model				N/A	As specified in A.3.26.2.2
Measurement bandwidth			η_{PRE}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 TDD	NA
RMSI CORESET Reference Channel				CR.1.1 TDD	NA
Dedicated CORESET Reference Channel				CCR.1.1 TDD	NA
OCNG Patterns				OP.1	NA

EPRE ratio of PSS to SSS		dB	0	NA
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-58.96
Propagation condition		-	AWGN	
channelOccupancyThreshold		dBm	-83	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.10.5.6.3.2-3: CO RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.10.5.6.3.3 Test Requirements

The nominal reported *channelOccupancy* shall be 100%. At least 90% of channel occupancy reports made by the UE shall indicate this value.

A.11 NR Standalone Tests with NR PCell under CCA and Other NR Cells in FR1

Editor's note: Test cases for NR SA with NR PCell under CCA and SCell under CCA are also included here.

A.11.1 RRC_IDLE state mobility

A.11.1.1 Cell re-selection with both source and target NR carrier frequencies under CCA

A.11.1.1.1 Cell reselection to FR1 intra-frequency NR cells when subject to CCA on the serving and target cell

A.11.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements subject to CCA specified in clause 4.2A.2.3. Supported test configurations are shown in table A. 11.1.1.1.2-1.

A.11.1.1.1.2 Test Parameters

The test scenario comprises of 1 NR carrier that is subject to CCA and 2 cells as given in tables A.11.1.1.1.2-1, A.11.1.1.1.2-2 and A.11.1.1.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.11.1.1.1.2-1: Supported test configurations

Configuration	Description
1	With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.1.1.1.2-2: General test parameters for intra frequency NR cell re-selection test case when subject to CCA

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
T2 end condition	Active cell		1	Cell2	
	Neighbour cells		1	Cell1	
Final condition	Active cell		1	Cell1	
RF Channel Number			1	1	
Time offset between cells			1	3 μ s	Synchronous cells
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration	Semi-static channel access		1	SSB.1 CCA	(As defined in A.3.10A)
	Dynamic channel access			SSB.2 CCA	
DBT Window Configuration			1	DBT.1	As specified in clause A.3.28.1.

SMTC configuration			SMTC.1	
DL CCA model		1	As specified in clause A.3.26.2.1	
UL CCA model		1	As specified in clause A.3.26.2.2	
DRX cycle length	s	1	1.28	The value shall be used for all cells in the test.
PRACH configuration index		1	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1	Not configured	
T1	s	1	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.11.1.1.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case in AWGN when subject to CCA

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	TDDConf.1.1 CCA			TDDConf.1.1 CCA		
DL CCA probability for semi-static channel access (P_{CCA_DL})		1	0.9			0.9		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1	0.75			0.75		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1	0.5			0.5		
UL CCA probability P_{CCA_UL}		1	1			1		
$M_{d,max}$		1	16			16		
$M_{m,max}$		1	4			4		
$M_{e,max}$		1	8			8		
PDSCH RMC		1	SR.1.1 CCA			SR.1.1 CCA		
RMSI CORESET		1	CR.1.1 CCA			CR.1.1 CCA		
Dedicated CORESET		1	CCR.1.1 CCA			CCR.1.1 CCA		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
$Q_{rxlevmin}$	dBm/SCS	1	-127			-127		
$P_{compensation}$	dB	1	0			0		
Q_{hyst_s}	dB	1	0			0		
$Q_{offset_{s,n}}$	dB	1	0			0		
Cell_selection_and_reselection_quality_measurement		1	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{n}$	dB	1	16	-3.11	2.79	-infinity	2.79	-3.11

N_{oc} ^{Note2}	dBm/SCS	1	-95					
N_{oc} ^{Note2}	dBm/15 kHz	1	-98					
$\hat{E}_s / N_{oc}$	dB	1	16	13	16	-infinity	16	13
SS-RSRP ^{Note3}	dBm/SCS	1	-79	-82	-79	-infinity	-79	-82
Io	dBm/38.16 MHz	1	-47.85	-46.12	-46.12	Same as parameters specified in Cell 1 columns-		
Treselection	s	1	0	0	0	0	0	0
SintrasearchP	dB	1	50			50		
Propagation Condition		1	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over							
Note 3:	subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.							

A.11.1.1.1.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than $(25 + M_d) \cdot 1.28 + T_{SI_CCA}$ s. M_d is the number of DRX cycles with at least one SMTC where there are no SSBs available during the T_{detect, NR_intra_CCA} . If $M_d > M_{d,max}$ the UE is required to restart the detection of Cell 2.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell shall be less than $(5 + M_e) \cdot 1.28 + T_{SI_CCA}$ s. M_e is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate, NR_intra_CCA}$. If $M_e > M_{e,max}$ the UE is required to restart the evaluation of Cell 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{detect, NR_intra_CCA} + T_{SI_CCA}$, and to an already detected cell can be expressed as: $T_{evaluate, NR_intra_CCA} + T_{SI_CCA}$,

Where:

- T_{detect, NR_intra_CCA} See Table 4.2A.2.3-1 in clause 4.2A.2.3
- $T_{evaluate, NR_intra_CCA}$ See Table 4.2A.2.3-1 in clause 4.2A.2.3
- T_{SI_CCA} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.

This gives a total of $(25 + M_d) \cdot 1.28 + T_{SL_CCA}$ s for the cell re-selection delay to a newly detectable cell and $(5 + M_d) \cdot 1.28 + T_{SL_CCA}$ s for the cell re-selection delay to an already detected cell in the test case.

A.11.1.1.2 Cell reselection to FR1 inter-frequency NR case when subject to CCA on the serving and target cell

A.11.1.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements subject to CCA specified in clause 4.2A.2.4. Supported test configurations are shown in table A.11.1.1.2.2-1.

A.11.1.1.2.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers that are subject to CCA respectively as given in tables A.11.1.1.2.2-1, A.11.1.1.2.2-2 and A.11.1.1.2.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table A.11.1.1.2.2-1: Supported test configurations

Configuration	Description of cell 1 with CCA	Description of cell 2 with CCA
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.1.1.2.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case when subject to CCA

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
T1 end condition	Active cell		1	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1	Cell2	
T3 end condition	Active cell		1	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
RF Channel Number			1	1, 2	
Time offset between cells			1	3 μ s	Synchronous cells
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration	Semi-static channel access		1	SSB.1 CCA (As defined in A.3.10A)	
	Dynamic channel access			SSB.2 CCA (As defined in A.3.10A)	
DBT Window Configuration			1	DBT.1	As specified in clause A.3.28.1.
SMTC configuration			1	SMTC.1	
DL CCA model			1	As specified in clause A.3.26.2.1	
UL CCA model			1	As specified in clause A.3.26.2.2	
DRX cycle length		s	1	1.28	The value shall be used for all cells in the test.

PRACH configuration index		1	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1	Not configured	
T1	s	1	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.11.1.1.2.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	TDDConf.1.1 CCA			TDDConf.1.1 CCA		
DL CCA probability for semi-static channel access (P_{CCA_DL})		1	0.9			0.9		
DL CCA probability for dynamic static channel access ($P_{CCA_DL_1}$)		1	0.75			0.75		
DL CCA probability for dynamic static channel access ($P_{CCA_DL_2}$)		2	0.5			0.5		
UL CCA probability P_{CCA_UL}		1	1			1		
$M_{d,max}$		1	16			16		
$M_{m,max}$		1	4			4		
$M_{e,max}$		1	8			8		
PDSCH RMC		1	SR.1.1 CCA			SR.1.1 CCA		
RMSI CORESET		1	CR.1.1 CCA			CR.1.1 CCA		
Dedicated CORESET		1	CCR.1.1 CCA			CCR.1.1 CCA		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
$Q_{rxlevmin}$	dBm/SCS	1	-137			-137		
$P_{compensation}$	dB	1	0			0		
Q_{hyst_s}	dB	1	0			0		
$Q_{offset_{s,n}}$	dB	1	0			0		
Cell_selection_and_reselection_quality_measurement		1	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{n}$	dB	1	14	14	14	-4	-infinity	12

N_{oc} ^{Note2}	dBm/SCS	1	-95					
N_{oc} ^{Note2}	dBm/15 kHz	1	-98					
$\hat{E}_s / N_{oc}$	dB	1	14	14	14	-4	-infinity	12
SS-RSRP ^{Note3}	dBm/SCS	1	-81	-81	-81	-99	-infinity	-83
Io	dBm/38.16 MHz	1	-49.79	-49.79	-49.79	-65.50	-infinity	-54.69
Treselection	s	1	0	0	0	0	0	0
SnonintrasearchP	dB	1	50			50		
Thresh _{x, high}	dB	1	48			48		
Thresh _{serving, low}	dB	1	44			44		
Thresh _{x, low}	dB	1	50			50		
Propagation Condition		1	AWGN					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 4: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.								

A.11.1.1.2.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than $60 + 1.28 \times (5 + M_e) + T_{SI_CCA}$ s. M_e is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate, NR_Intra_CCA}$. If $M_e > M_{e, max}$ the UE is required to restart the evaluation of cell 2.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to a lower priority cell shall be less than $1.28 \times (5 + M_e) + T_{SI_CCA}$ s. M_e is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate, NR_Intra_CCA}$. If $M_e > M_{e, max}$ the UE is required to restart the evaluation of cell 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate, NR_inter_CCA} + T_{SI_CCA}$, and to a lower priority cell can be expressed as: $T_{evaluate, NR_inter_CCA} + T_{SI_CCA}$,

Where:

- $T_{higher_priority_search}$ See clause 4.2.2.7
- $T_{evaluate, NR_inter_CCA}$ See Table 4.2A.2.4-1 in clause 4.2A.2.4

- T_{SL_CCA} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.

This gives a total of $60 + 1.28 \times (5 + M_e) + T_{SL_CCA}$ s for the cell re-selection delay to a higher priority cell and $1.28 \times (5 + M_e) + T_{SL_CCA}$ s for the cell re-selection delay to a lower priority cell in the test case.

A.11.1.2 Cell re-selection to NR with source NR carrier frequency under CCA

A.11.1.2.1 Cell reselection to FR1 inter-frequency NR case when serving cell is subject to CCA

A.11.1.2.1.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2.2.4 when the serving cell is subject to CCA. Supported test configurations are shown in table A.11.1.2.1.2-1.

A.11.1.2.1.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers where the first carrier is subject to CCA as given in tables A.11.1.2.1.2-1, A.11.1.2.1.2-2 and A.11.1.2.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table A.11.1.2.1.2-1: Supported test configurations

Configuration	Description of a cell with CCA	Description of a cell without CCA
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.11.1.2.1.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case when serving cell is subject to CCA

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 which is subject to CCA in the initial phase and during T1 period the UE reselects to cell 1 which is an inter-frequency NR cell
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T3 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells

Access Barring Information	-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration		1	Cell 1: SMTC.1 Cell 2: SMTC.1	
		2	Cell 1: SMTC.1 Cell 2: SMTC.1	
		3	Cell 1: SMTC.1 Cell 2: SMTC.1	
SMTC configuration		1	Cell 1: SMTC pattern 2 Cell 2: N/A	
		2	Cell 1: SMTC pattern 1 Cell 2: N/A	
		3	Cell 1: SMTC pattern 1 Cell 2: N/A	
DBT Window Configuration		1, 2, 3	Cell 1: N/A Cell 2: DBT.1	As specified in clause A.3.28.1.
DL CCA model		1, 2, 3	Cell 1: N/A Cell 2: As specified in clause A.3.26.2.1	
UL CCA model		1, 2, 3	Cell 1: N/A Cell 2: As specified in clause A.3.26.2.2	
DRX cycle length	s	1, 2, 3	1.28	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.11.1.2.1.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN when serving cell is subject to CCA

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			TDDConf.1.1.CCA		
		2	TDDConf.1.1			TDDConf.1.1.CCA		
		3	TDDConf.2.1			TDDConf.1.1.CCA		
DL CCA probability for semi-static channel access (P _{CCA_DL})		1, 2, 3	N/A			0.9		
DL CCA probability for for dynamic static channel access (P _{CCA_DL_1})		1, 2, 3	N/A			0.75		

DL CCA probability for for dynamic static channel access (P _{CCA_DL_2})		1, 2, 3	N/A			0.5		
UL CCA probability P _{CCA_UL}		1, 2, 3	N/A			1		
M _{d,max}		1, 2, 3	N/A			16		
M _{m,max}		1, 2, 3	N/A			4		
M _{e,max}		1, 2, 3	N/A			8		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 CCA		
		2	SR.1.1 TDD			SR.1.1 CCA		
		3	SR.2.1 TDD			SR.1.1 CCA		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 CCA		
		2	CR.1.1 TDD			CR.1.1 CCA		
		3	CR.2.1 TDD			CR.1.1 CCA		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 CCA		
		2	CCR.1.1 TDD			CCR.1.1 CCA		
		3	CCR.2.1 TDD			CCR.1.1 CCA		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-140			-137		
		3	-137			-137		
Pcompensation	dB	1, 2, 3	0			0		
Cell_selection_and_ reselection_quality_ measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s/I_{ot}$	dB	1	14	14	14	-4	-infinity	12
		2						
		3						
N_{oc} Note2	dBm/SCS	1	-98			-95		
		2	-98			-95		
		3	-95					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s/N_{oc}$	dB	1	14	14	14	-4	-infinity	12
		2						
		3						
SS-RSRP Note3	dBm/SCS	1	-84	-84	-84	-99	-infinity	-83
		2	-84	-84	-84	-99	-infinity	-83
		3	-81	-81	-81	-99	-infinity	-83
Io	dBm/9.36 MHz	1	-55.88	-55.88	-55.88	-65.50	-66.96	-54.69
	dBm/9.36 MHz	2	-55.88	-55.88	-55.88	-65.50	-66.96	-54.69
	dBm/38.16 MHz	3	-49.79	-49.79	-49.79	-65.50	-66.96	-54.69
Treselection	s	1, 2, 3	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	50			50		
Thresh _{x, highP}	dB	1, 2, 3	48			48		
Thresh _{serving, lowP}	dB	1, 2, 3	44			44		
Thresh _{x, lowP}	dB	1, 2, 3	50			50		
Propagation Condition		1, 2, 3	AWGN					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.1.2.1.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than $60 + 1.28 \times (5 + M_e) + T_{SI_CCA}$ s. M_e is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate_NR_Intra_CCA}$. If $M_e > M_{e,max}$ the UE is required to restart the evaluation of cell 2.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate_NR_inter_CCA} + T_{SI_CCA}$, and to a lower priority cell can be expressed as: $T_{evaluate_NR_inter} + T_{SI_NR}$.

Where:

- $T_{higher_priority_search}$ See clause 4.2.2.7
- $T_{evaluate_NR_inter_CCA}$ See Table 4.2A.2.4-1 in clause 4.2A.2.4
- T_{SI_CCA} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.
- $T_{evaluate_NR_inter}$ See Table 4.2.2.4-1 in clause 4.2.2.4
- T_{SI_NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test cases.

This gives a total of $60 + 1.28 \times (5 + M_e) + T_{SI_CCA}$ s for the cell re-selection delay to a higher priority cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

A.11.1.3 Cell re-selection from NR carrier with target NR carrier frequency under CCA

A.11.1.3.1 Cell reselection to FR1 inter-frequency NR case when target cell is subject to CCA

A.11.1.3.1.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2A.2.4 when the target cell is subject to CCA. Supported test configurations are shown in table A.11.1.3.1.2-1.

A.11.1.3.1.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers where the second carrier is subject to CCA as given in tables A.11.1.3.1.2-1, A.11.1.3.1.2-2 and A.11.1.3.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table A.11.1.3.1.2-1: Supported test configurations

Configuration	Description of a cell without CCA	Description of a cell with CCA
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.		

Table A.11.1.3.1.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case when target cell is subject to CCA

Parameter	Unit	Test configuration	Value	Comment
Initial condition	Active cell	1, 2, 3	Cell2	The UE camps on cell 2 which is an inter-frequency NR cell in the initial phase and during T1 period the UE reselects to cell 1 which is cell subject to CCA
	Neighbour cell	1, 2, 3	Cell 1	
T1 end condition	Active cell	1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells	1, 2, 3	Cell2	
T3 end condition	Active cell	1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell	1, 2, 3	Cell 1	
RF Channel Number		1, 2, 3	1, 2	
Time offset between cells		1	3 ms	Asynchronous cells
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
Access Barring Information	-	1, 2, 3	Not Sent	No additional delays in random access procedure.

SSB configuration		1	Cell 1: SSB.1 CCA for semi-static channel access; Cell 1: SSB.2 CCA for dynamic channel access; Cell 2: SSB.1 FR1	
		2	Cell 1: SSB.1 CCA for semi-static channel access; Cell 1: SSB.2 CCA for dynamic channel access; Cell 2: SSB.1 FR1	
		3	Cell 1: SSB.1 CCA for semi-static channel access; Cell 1: SSB.2 CCA for dynamic channel access; Cell 2: SSB.2 FR1	
SMTC configuration		1	Cell 1: SMTC.1 Cell 2: SMTC.2	
		2	Cell 1: SMTC.1 Cell 2: SMTC.1	
		3	Cell 1: SMTC.1 Cell 2: SMTC.1	
DBT Window Configuration		1, 2, 3	Cell 1: DBT.1 Cell 2: N/A	As specified in clause A.3.28.1.
DL CCA model		1, 2, 3	Cell 1: As specified in clause A.3.26.2.1 Cell 2: N/A	
UL CCA model		1, 2, 3	Cell 1: As specified in clause A.3.26.2.2 Cell 2: N/A	
DRX cycle length	s	1, 2, 3	1.28	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.11.1.3.1.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN when target cell is subject to CCA

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	TDDConf.1.1.CCA			N/A		
		2	TDDConf.1.1.CCA			TDDConf.1.1		
		3	TDDConf.1.1.CCA			TDDConf.2.1		
DL CCA probability for semi-static channel access (P _{CCA_DL})		1, 2, 3	0.9			N/A		
DL CCA probability for for dynamic static channel access (P _{CCA_DL_1})		1, 2, 3	0.75			N/A		
DL CCA probability for for dynamic static channel access (P _{CCA_DL_2})		1, 2, 3	0.5			N/A		
UL CCA probability P _{CCA_UL}		1, 2, 3	1			N/A		
M _{d,max}		1, 2, 3	16			N/A		
M _{m,max}		1, 2, 3	4			N/A		
M _{e,max}		1, 2, 3	8			N/A		
PDSCH RMC configuration		1	SR.1.1 CCA			SR.1.1 FDD		
		2	SR.1.1 CCA			SR.1.1 TDD		
		3	SR.1.1 CCA			SR.2.1 TDD		
RMSI CORESET RMC configuration		1	CR.1.1 CCA			CR.1.1 FDD		
		2	CR.1.1 CCA			CR.1.1 TDD		
		3	CR.1.1 CCA			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 CCA			CCR.1.1 FDD		
		2	CCR.1.1 CCA			CCR.1.1 TDD		
		3	CCR.1.1 CCA			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Q _{rxlevmin}	dBm/SCS	1, 2	-137			-140		
		3	-137			-137		
P _{compensation}	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1	14	14	14	-4	-infinity	12
		2						
		3						
N_{oc} ^{Note2}	dBm/SCS	1	-95			-98		
		2	-95			-98		
		3	-95			-98		
N_{oc} ^{Note2}	dBm/15 kHz	1	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1	14	14	14	-4	-infinity	12
		2						

SS-RSRP ^{Note3}	dBm/SCS	3						
		1	-81	-81	-81	-102	-infinity	-86
		2	-81	-81	-81	-102	-infinity	-86
		3	-81	-81	-81	-99	-infinity	-83
Io	dBm/9.36 MHz	1	--	--	--	-68.60	-70.05	-57.78
	dBm/9.36 MHz	2	--	--	--	-68.60	-70.05	-57.78
	dBm/38.16 MHz	3	-49.79	-49.79	-49.79	-65.50	-66.96	-54.69
Treselection	s	1, 2, 3	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	50			50		
Thresh _{x, highP}	dB	1, 2, 3	48			48		
Thresh _{serv, lowP}	dB	1, 2, 3	44			44		
Thresh _{x, lowP}	dB	1, 2, 3	50			50		
Propagation Condition		1, 2, 3	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers							
	and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.							

A.11.1.3.1.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

$1.28 \times (5 + M_e) + T_{SL_CCA}$ s. M_e is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate_NR_Intra_CCA}$. If $M_e > M_{e,max}$ the UE is required to restart the evaluation of cell 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate_NR_inter} + T_{SI-NR}$, and to a lower priority cell can be expressed as: $T_{evaluate_NR_inter} + T_{SI-NR}$.

Where:

- $T_{higher_priority_search}$ See clause 4.2.2.7
- $T_{evaluate_NR_inter_CCA}$ See Table 4.2A.2.4-1 in clause 4.2A.2.4
- T_{SL_CCA} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.
- $T_{evaluate_NR_inter}$ See Table 4.2.2.4-1 in clause 4.2.2.4
- T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority cell and $1.28 \times (5 + M_e) + T_{SL_CCA}$ s for the cell re-selection delay to a lower priority cell in the test case.

A.11.1.4 Inter-RAT cell re-selection to E-UTRAN with source NR carrier frequency under CCA

A.11.1.4.1 Cell reselection to higher priority E-UTRAN when serving cell is subject to CCA

A.11.1.4.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR cell subject to CCA to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2A.2.5 when the E-UTRAN cell is of higher priority.

A.11.1.4.1.2 Test Parameters

The test scenario comprises of one NR cell which is subject to CCA and one E-UTRAN cell as given in tables A.11.1.4.1.2-1, A.11.1.4.1.2-2, A.11.1.4.1.2-3 and A.11.1.4.1.2-4. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. NR cell 1 is already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of higher priority than cell 1.

Table A.11.1.4.1.2-1: Supported test configurations

Configuration	Description of a cell with CCA	Description of a cell without CCA
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.11.1.4.1.2-2: General test parameters for NR cell subject to CCA to E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	The UE camps on cell 1 in the initial phase and during T2 period the UE reselects to cell 2.
	Neighbour cells		1, 2	Cell1	
T2 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to cell 2 during T2.
	Neighbour cells		1, 2	Cell1	
T3 end condition	Active cell		1, 2	Cell1	The UE shall perform reselection to cell 1 during T3 for iteration of the tests.
	Neighbour cells		1, 2	Cell2	
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.1	
DBT Window Configuration			1, 2	DBT.1	As specified in clause A.3.28.1.

SSB configuration			Cell 1: SSB.1 CCA for semi-static channel access; Cell 1: SSB.2 CCA for dynamic channel access;	
DL CCA model		1, 2	As specified in clause A.3.26.2.1	
UL CCA model		1, 2	As specified in clause A.3.26.2.2	
DRX cycle length	s	1, 2	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index		1, 2	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index		1	53	As specified in table 5.7.1-2 in TS 36.211 [23]
		2	4	
E-UTRAN PRACH configuration index		1	53	As specified in table 5.7.1-2 in TS 36.211 [23]
		2	4	
T1	s	1, 2	>7	During T1, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T2.
T2	s	1, 2	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.11.1.4.1.2-3: Cell specific test parameters for NR cell 1 subject to CCA

Parameter	Unit	Test configuration	Cell 1		
			T1	T2	T3
TDD configuration		1, 2	TDDConf.1.1.CCA		
DL CCA probability for semi-static channel access (P_{CCA_DL})		1, 2	0.9		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1, 2	0.75		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1, 2	0.5		
UL CCA probability P_{CCA_UL}		1, 2	1		
$M_{d,max}$		1, 2	16		
$M_{m,max}$		1, 2	4		
$M_{e,max}$		1, 2	8		
PDSCH parameters		1, 2	SR.1.1 CCA		
RMSI CORESET parameters		1, 2	CR.1.1 CCA		
Dedicated CORESET parameters		1, 2	CCR.1.1 CCA		
SSB parameters		1, 2	SSB.1 CCA for semi-static channel access; SSB.2 CCA for dynamic channel access		
NR SMTC parameters		1, 2	SMTC.1		
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2	DLBWP.0		
Initial UL BWP configuration		1, 2	ULBWP.0		
RLM-RS		1, 2	SSB		
$Q_{rxlevmin}$	dBm/SCS	1, 2	-137		

N_{oc}	dBm/SCS	1, 2	-95		
N_{oc}	dBm/15 kHz	1, 2	-98		
SS-RSRP		1, 2	-81	-81	-81
$\hat{E}_s / I_{ot}$	dB	1, 2	14	14	14
$\hat{E}_s / N_{oc}$ Io	dB	1, 2	14	14	14
	dBm/38.16 MHz	1, 2	-49.79	-49.79	-49.79
Treselection	S	1, 2	0		
Snonintrasearch	dB	1, 2	50		
Thresh _{x, high} (Note 2)	dB	1, 2	48		
Thresh _{serving, low}	dB	1, 2	44		
Thresh _{x, low}	dB	1, 2	50		
Propagation Condition		1, 2	AWGN		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	This refers to the value of Thresh _{x, high} which is included in NR system information, and is a threshold for the E-UTRA target cell				
Note 3:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.				

Table A.11.1.4.1.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2		
		T1	T2	T3
E-UTRA RF Channel number		1		
BW _{channel}	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
OCNG_RB ^{Note 1}	dB			
Qrxlevmin	dBm	-140		
N_{oc}	dBm/15 kHz	-98		
RSRP	dBm/15 KHz	-infinity	-86	-102
$\hat{E}_s / I_{ot}$	dB	-infinity	12	-4
$\hat{E}_s / N_{oc}$	dB	-infinity	12	-4
Treselection _{EUTRAN}	S	0		
Snonintrasearch	dB	50		
Thresh _{x, high} (Note 2)	dB	48		
Thresh _{serving, low}	dB	44		
Thresh _{x, low}	dB	50		

Propagation Condition	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.	
Note 2: This refers to the value of $\text{Thresh}_{x, \text{high}}$ which is included in E-UTRA system information, and is a threshold for the NR target cell	

A.11.1.4.1.3 Test Requirements

The cell reselection delay to a higher priority E-UTRAN cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{evaluate, E-UTRAN}} + T_{\text{SI-E-UTRA}}$

Where:

- $T_{\text{higher_priority_search}}$ See clause 4.2.2.7
- $T_{\text{evaluate, E-UTRAN}}$ See Table 4.2.2.5-1 in clause 4.2.2.5
- $T_{\text{SI-E-UTRA}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority E-UTRAN cell.

A.11.1.4.2 Cell reselection to lower priority E-UTRAN when serving cell is subject to CCA

A.11.1.4.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR cell subject to CCA to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2A.2.5 when the E-UTRAN cell is of lower priority.

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.11.1.4.2.1-1, A.11.1.4.2.1-2, A.11.1.4.2.1-3 and A.11.1.4.2.1-4. The test consists of three successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

Table A.11.1.4.2.1-1: Supported test configurations

Configuration	Description of a cell with CCA	Description of a cell without CCA
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.11.1.4.2.1-2: General test parameters for NR cell subject to CCA to E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	The UE camps on cell 1 in the initial phase.
T1 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cells		1, 2	Cell1	
T2 end condition	Active cell		1, 2	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cells		1, 2	Cell2	
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.1	
DBT Window Configuration			1, 2	DBT.1	As specified in clause A.3.28.1.
DL CCA model			1, 2	As specified in clause A.3.26.2.1	
UL CCA model			1, 2	As specified in clause A.3.26.2.2	
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1	53	As specified in table 5.7.1-2 in TS 36.211 [23]
			2	4	
T1		s	1, 2	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.11.1.4.2.1-3: Cell specific test parameters for NR cell 1 subject to CCA

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 2	TDDConf.1.1.CCA	
DL CCA probability for semi-static channel access (P_{CCA_DL})		1, 2	0.9	
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1, 2	0.75	
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1, 2	0.5	
UL CCA probability P_{CCA_UL}		1, 2	1	
$M_{d,max}$		1, 2	16	
$M_{m,max}$		1, 2	4	
$M_{e,max}$		1, 2	8	
PDSCH RMC configuration		1, 2	SR.1.1 CCA	
RMSI CORESET RMC Configuration		1, 2	CR.1.1 CCA	
Dedicated CORESET RMC Configuration		1, 2	CCR.1.1 CCA	
SSB configuration		1, 2	SSB.1 CCA for semi-static channel access; SSB.2 CCA for dynamic channel access	

SMTC configuration		1, 2	SMTC.1	
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2	DLBWP.0	
Initial UL BWP configuration		1, 2	ULBWP.0	
RLM-RS		1, 2	SSB	
$Q_{rxlevmin}$	dBm/SCS	1, 2	-137	
N_{oc}	dBm/SCS	1, 2	-95	
N_{oc}	dBm/15 kHz	1, 2	-98	
SS-RSRP	dBm/SCS	1, 2	-99	-83
$\hat{E}_s/I_{ot}$	dB	1, 2	-4	12
$\hat{E}_s/N_{oc}$	dB	1, 2	-4	12
I_o	dBm/38.16 MHz	1, 2	-62.50	-51.69
Treselection	S	1, 2	0	
Snonintrasearch	dB	1, 2	50	
Thresh _{x, high} (Note 2)	dB	1, 2	48	
Thresh _{serving, low}	dB	1, 2	44	
Thresh _{x, low}	dB	1, 2	50	
Propagation Condition		1, 2	AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	This refers to the value of Thresh _{x, high} which is included in NR system information, and is a threshold for the E-UTRA target cell			
Note 3:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.			

Table A.11.1.4.2.1-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
$BW_{channel}$	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note 1}	dB		
OCNG_RB ^{Note 1}	dB		

Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s / I_{ot}$	dB	14	14
$\hat{E}_s / N_{oc}$	dB	14	14
TreselectionEUTRAN	S	0	
Snonintrasearch	dB	50	
Thresh _{x, high} (Note 2)	dB	48	
Thresh _{serving, low}	dB	44	
Thresh _{x, low}	dB	50	
Propagation Condition		AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	This refers to the value of Thresh _{x, high} which is included in E-UTRA system information, and is a threshold for the NR target cell		

A.11.1.4.2.2 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{evaluate, E-UTRAN} + T_{SI-E-UTRA}$,

Where:

- $T_{evaluate, E-UTRAN}$ See Table 4.2.2.5-1 in clause 4.2.2.5
- $T_{SI-E-UTRA}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8 s for the cell re-selection delay to a lower priority E-UTRAN cell.

A.11.2 RRC_CONNECTED state mobility

A.11.2.1 Handover

A.11.2.1.1 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; known target cell

A.11.2.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR intra frequency handover requirements from FR1 carrier under CCA to FR1 carrier under CCA specified in clause 6.1B.1.2.

A.11.2.1.1.2 Test Parameters

Supported test configurations are shown in table A.11.2.1.1.2-1. Both handover delay and interruption length are tested by using the parameters in table A.11.2.1.1.2-2, and A.11.2.1.1.2-3.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

NR shall send a RRC message implying handover to cell 2. The RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.11.2.1.1.2-1: Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA test configurations

Config	Description
1	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.2.1.1.2-2: General test parameters Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	On the carrier under CCA
	Neighbouring cell		Cell 2	On the carrier under CCA
Final condition	Active cell		Cell 2	On the carrier under CCA
DL CCA model	Dynamic channel access ^{Note 1, 3}		As specified in clause A.3.26.2.1	
	Semi-static channel access ^{Note 2, 3}			
UL CCA model	Dynamic channel access ^{Note 1, 3}		As specified in clause A.3.26.2.2	
	Semi-static channel access ^{Note 2,3}			
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μ s	Synchronous cells
T304		ms	500	
L _{CCA_DL}			5	
W _{CCA_DL}		ms	T304	
L _{CCA_UL}			5	
W _{CCA_UL}		ms	T304	
T1		s	5	
T2		s	≤ 5	
T3		s	$\geq T_{\text{interrupt}}$	T _{interrupt} is defined in clause 6.1B.1.2
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.2.1.1.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
P _{CCA_DL} for dynamic channel access ^{Note 4,6}		-	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75			P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75		
P _{CCA_DL} for semi-static channel access ^{Note 5,6}		-	P _{CCA_DL} =0.9375			P _{CCA_DL} =0.9375		
P _{CCA_UL} for dynamic channel access ^{Note 4,6}		-	0.75			0.75		
P _{CCA_UL} for semi-static channel access ^{Note 5,6}		-	0.87			0.87		
TDD configuration	Config 1		TDDConf.1.1 CCA					
BW _{channel}	Config 1		40: N _{RB,c} = 106					
BWP BW	Config 1		40: N _{RB,c} = 106					
DRX Cycle		ms	Not Applicable					
PDSCH Reference	Config 1		SR.1.1 CCA					
CORESET Reference Channel	Config 1		CR.1.1 CCA					
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 CCA					
TRS configuration	Config 1		TRS.1.1 TDD					
OCNG Patterns			OP.1					
SMTC Configuration			SMTC.1					
DBT window configuration	Config 1		DBT.1					
SSB configuration for semi-static channel access ^{Note 4, 6}	Config 1		SSB.1 CCA					
SSB configuration for dynamic channel access ^{Note 5, 6}	Config 1		SSB.2 CCA					
ssb-PositionQCL	Config 1		[1]					
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1	kHz	30 kHz					
PRACH configuration			FR1 PRACH configuration 1 under CCA					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N _{oc} ^{Note2}		dBm/15kHz z	-98					
N _{oc} ^{Note2}	Config 1	dBm/SCS	-95					
Ê _s / I _{ot}		dB	8	-3.3	-3.3	- Infinity	2.36	2.36

$\hat{E}_s / N_{oc}$		dB	8	8	8	- Infinity	11	11
SSB_RP	Config 1	dBm/SCS	-87	-87	-87	- Infinity	-84	-84
I_o ^{Note3}	Config 1	dBm/ 38.16MHz	-55.31	-50.96	-50.96	-55.31	-50.96	-50.96
Propagation condition		-	AWGN			AWGN		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.							
Note 5:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.							
Note 6:	For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.							

A.11.2.1.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than $T_{\text{interrupt}}$ from the beginning of time period T3, where $T_{\text{interrupt}}$ is defined in clause 6.1B.1.2

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{\text{interrupt}}$, where:

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}}$$

$$T_{\text{search}} = 0.$$

$$T_{\text{processing}} = 20 \text{ ms.}$$

$$T_{\text{margin}} = 2 \text{ ms.}$$

$$T_{\Delta} = (1 + L_2) * 20 \text{ ms.}$$

$$T_{\text{IU}} = (1 + L_3) * 10 + 10 \text{ ms}$$

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2], L_2 is the number of SMTC occasions not available at the UE during the time tracking period where $L_2 \leq L_{\text{CCA_DL}}$, and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure, where $L_3 \leq L_{\text{CCA_UL}}$. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33]. The interruption time considering the potential extensions caused by L_1 , L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2]. Test equipment should make sure that $L_{\text{CCA_DL}}$ and $L_{\text{CCA_UL}}$ are not exceeded during a test by monitoring the number of CCA failures and preventing additional CCA failures from happening after $L_{\text{CCA_DL}}$ or $L_{\text{CCA_UL}}$ is reached.

A.11.2.1.2 Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell

A.11.2.1.2.1 Test Purpose and Environment

This test is to verify the requirement intra frequency handover requirements from FR1 carrier under CCA to FR1 carrier under CCA specified in clause 6.1B.1.2.

A.11.2.1.2.2 Test Parameters

Supported test configurations are shown in table A.11.2.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.11.2.1.2.2-2, and A.11.2.1.2.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.11.2.1.2.2-1: Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA test configurations

Config	Description
1	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.2.1.2.2-2: General test parameters Intra-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	On the carrier under CCA
	Neighbouring cell	Cell 2	On the carrier under CCA
Final condition	Active cell	Cell 2	On the carrier under CCA
DL CCA model	Dynamic channel access ^{Note 1, 3}	As specified in clause A.3.26.2.1	
	Semi-static channel access ^{Note 2, 3}		
UL CCA model	Dynamic channel access ^{Note 1, 3}	As specified in clause A.3.26.2.2	
	Semi-static channel access ^{Note 2,3}		
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T304	ms	500	
L _{CCA_DL}		5	
W _{CCA_DL}	ms	T304	
L _{CCA_UL}		5	
W _{CCA_UL}	ms	T304	
T1	s	5	
T2	s	$\geq T_{\text{interrupt}}$	$T_{\text{interrupt}}$ is defined in clause 6.1B.1.2
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.			
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.			
NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.11.2.1.2.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
NR RF Channel Number		1		1	
P _{CCA_DL} for dynamic channel access ^{Note 4,6}	-	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75		P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75	

P _{CCA,DL} for semi-static channel access ^{Note 5,6}		-	P _{CCA,DL} =0.9375		P _{CCA,DL} =0.9375	
P _{CCA,UL} for dynamic channel access ^{Note 4,6}		-	0.75		0.75	
P _{CCA,UL} for semi-static channel access ^{Note 5,6}		-	0.87		0.87	
TDD configuration	Config 1		TDDConf.1.1 CCA			
BW _{channel}	Config 1		40: N _{RB,c} = 106			
BWP BW	Config 1		40: N _{RB,c} = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference	Config 1		SR.1.1 CCA			
CORESET Reference Channel	Config 1		CR.1.1 CCA			
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 CCA			
TRS configuration	Config 1		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
DBT window configuration	Config 1		DBT.1			
SSB configuration for semi-static channel access ^{Note 4, 6}	Config 1		SSB.1 CCA			
SSB configuration for dynamic channel access ^{Note 5, 6}	Config 1		SSB.2 CCA			
ssb-PositionQCL	Config 1		[1]			
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1	kHz	30 kHz			
PRACH configuration			FR1 PRACH configuration 1 under CCA			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N _{oc} ^{Note2}		dBm/15kHz	-98			
N _{oc} ^{Note2}	Config 1	dBm/SCS	-95			
Ê _s / I _{ot}		dB	8	-0.64	-Infinity	-0.64
Ê _s / N _{oc}		dB	8	8	-Infinity	8
SSB _{RP}	Config 1	dBm/SCS	-87	-87	-Infinity	-87
I _o ^{Note3}	Config 1	dBm/38.16MHz	-55.31	-52.60	-55.31	-52.60
Propagation condition		-	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 6:	For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

A.11.2.1.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than $T_{\text{interrupt}}$ from the beginning of time period T3, where $T_{\text{interrupt}}$ is defined in clause 6.1B.1.2

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{\text{interrupt}}$, where:

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}}$$

$$T_{\text{search}} = (1 + L_1) * 20 \text{ ms.}$$

$$T_{\text{processing}} = 20 \text{ ms.}$$

$$T_{\text{margin}} = 2 \text{ ms.}$$

$$T_{\Delta} = (1 + L_2) * 20 \text{ ms.}$$

$$T_{\text{IU}} = (1 + L_3) * 10 + 10 \text{ ms}$$

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2], L_1 is the number of SMTC occasions not available at the UE during the intra-frequency detection period, L_2 is the number of SMTC occasions not available at the UE during the time tracking period, where $L_1 + L_2 \leq L_{\text{CCA_DL}}$, and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure, where $L_3 \leq L_{\text{CCA_UL}}$. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33]. The interruption time considering the potential extensions caused by L_1 , L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer.

A.11.2.1.3 Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA; unknown target cell

A.11.2.1.3.1 Test Purpose and Environment

This test is to verify the requirement for inter frequency handover requirements from FR1 carrier under CCA to FR1 carrier under CCA specified in clause 6.1B.1.2.

A.11.2.1.3.2 Test Parameters

Supported test configurations are shown in table A.11.2.1.3.2-1. Both handover delay and interruption length are tested by using the parameters in table A.11.2.1.3.2-2, and A.11.2.1.3.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.11.2.1.3.2-1: Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA test configurations

Config	Description
1	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.2.1.3.2-2: General test parameters Inter-frequency handover from FR1 carrier under CCA to FR1 carrier under CCA

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	On the carrier under CCA
	Neighbouring cell	Cell 2	On the carrier under CCA
Final condition	Active cell	Cell 2	On the carrier under CCA
DL CCA model	Dynamic channel access ^{Note 1, 3}	As specified in clause A.3.26.2.1	
	Semi-static channel access ^{Note 2, 3}		
UL CCA model	Dynamic channel access ^{Note 1, 3}	As specified in clause A.3.26.2.2	
	Semi-static channel access ^{Note 2,3}		
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
T304	ms	500	
L _{CCA_DL}		5	
W _{CCA_DL}	ms	T304	
L _{CCA_UL}		5	
W _{CCA_UL}	ms	T304	
T1	s	5	
T2	s	≤ T _{interrupt}	T _{interrupt} is defined in clause 6.1B.1.2

NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table A.11.2.1.3.2-3: Cell specific test parameters for NR FR1-FR1 Inter frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
P _{CCA_DL} for dynamic channel access ^{Note 4,6}		-	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75		P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75	
P _{CCA_DL} for semi-static channel access ^{Note 5,6}		-	P _{CCA_DL} =0.9375		P _{CCA_DL} =0.9375	
P _{CCA_UL} for dynamic channel access ^{Note 4,6}		-	0.75		0.75	
P _{CCA_UL} for semi-static channel access ^{Note 5,6}		-	0.87		0.87	
TDD configuration	Config 1		TDDConf.1.1 CCA			
BW _{channel}	Config 1		40: N _{RB,C} = 106			
BWP BW	Config 1		40: N _{RB,C} = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference	Config 1		SR.1.1 CCA			
CORESET Reference Channel	Config 1		CR1.1 CCA			

Dedicated CORESET RMC configuration	Config 1		CCR.1.1 CCA			
TRS configuration	Config 1		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
DBT window configuration	Config 1		DBT.1			
SSB configuration for semi-static channel access Note 4, 6	Config 1		SSB.1 CCA			
SSB configuration for dynamic channel access Note 5, 6	Config 1		SSB.2 CCA			
ssb-PositionQCL	Config 1		[1]			
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1	kHz	30 kHz			
PRACH configuration			FR1 PRACH configuration 1 under CCA			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-98			
N_{oc} Note2	Config 1	dBm/SCS	-95			
$\hat{E}_s / I_{ot}$		dB	4	4	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	4	4	-Infinity	5
SSB_RP	Config 1	dBm/SCS	-91	-91	-Infinity	-90
I_o Note3	Config 1	dBm/38.16MHz	-58.49	-58.49	-63.94	-57.75
Propagation condition		-	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.						
Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.						

A.11.2.1.3.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than $T_{\text{interrupt}}$ from the beginning of time period T3, where $T_{\text{interrupt}}$ is defined in clause 6.1B.1.2

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{\text{interrupt}}$, where:

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}}$$

$$T_{\text{search}} = (3 + L_1') * 20 \text{ ms.}$$

$$T_{\text{processing}} = 20 \text{ ms.}$$

$$T_{\text{margin}} = 2 \text{ ms.}$$

$$T_{\Delta} = (1 + L_2) * 20 \text{ ms.}$$

$$T_{\text{IU}} = (1 + L_3) * 10 + 10 \text{ ms}$$

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2], L_1' is the number of SMTC occasions not available at the UE during the inter-frequency detection period, L_2 is the number of SMTC occasions not available at the UE during the time tracking period, where $L_1' + L_2 \leq L_{\text{CCA_DL}}$, and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure, where $L_3 \leq L_{\text{CCA_UL}}$. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33]. The interruption time considering the potential extensions caused by L_1 , L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer.

A.11.2.1.4 Inter-frequency handover from FR1 carrier under CCA to FR1; known target cell

A.11.2.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the NR with CCA FR1-NR FR1 handover requirements specified in clause 6.1.1.2.

A.11.2.1.4.2 Test Parameters

Supported test configurations are shown in table A.11.2.1.4.2-1. Both handover delay and interruption length are tested by using the parameters in table A.11.2.1.4.2-2, and A.11.2.1.4.2-3.

The test consists of three successive time periods, with time durations of T1 T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

NR with CCA shall send a RRC message implying handover to cell 2. The RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.11.2.1.4.2-1: Handover from NR with CCA FR1 to NR FR1 test configuration

Config	Description
1	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.2.1.4.2-2: General test parameters handover from NR with CCA FR1 to NR FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	NR cell with CCA
	Neighbouring cell		Cell 2	NR cell
Final condition	Active cell		Cell 2	
DL CCA model			As specified in clause A.3.26.2.1	
UL CCA model			As specified in clause A.3.26.2.2	
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
T304		ms	500	
L _{CCA_DL}			5	
W _{CCA_DL}		ms	T304	
L _{CCA_UL}			5	
W _{CCA_UL}		ms	T304	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μ s	Synchronous cells
T1		s	5	
T2		s	≤ 5	
T3		s	1	

Table A.11.2.1.4.2-3: Cell specific test parameters for NR with CCA FR1 – NR FR1 handover test case

Parameter	Unit	Test configur ation	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number		1,2,3	1			2		
Duplex mode		1	TDD			FDD		
		2	TDD			TDD		
		3	TDD			TDD		
TDD configuration		1	TDDConf.1.1 CCA			Not Applicable		
		2	TDDConf.1.1 CCA			TDDConf.1.1		
		3	TDDConf.1.1 CCA			TDDConf.2.1		
BW _{channel}	MHz	1	40: N _{RB,c} = 106			10: N _{RB,c} = 52		
		2	40: N _{RB,c} = 106			10: N _{RB,c} = 52		
		3	40: N _{RB,c} = 106			40: N _{RB,c} = 106		
BWP BW	MHz	1	40: N _{RB,c} = 106			10: N _{RB,c} = 52		
		2	40: N _{RB,c} = 106			10: N _{RB,c} = 52		
		3	40: N _{RB,c} = 106			40: N _{RB,c} = 106		
DRX Cycle	ms	1,2,3	Not Applicable					
PDSCH Reference measurement channel		1	SR.1.1 CCA			SR.1.1 FDD		
		2	SR.1.1 CCA			SR.1.1 TDD		
		3	SR.1.1 CCA			SR2.1 TDD		
CORESET Reference Channel		1	CR1.1 CCA			CR.1.1 FDD		
		2	CR1.1 CCA			CR.1.1 TDD		
		3	CR1.1 CCA			CR2.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 CCA			CCR.1.1 FDD		
		2	CCR.1.1 CCA			CCR.1.1 TDD		

DL CCA probability for semi-static channel access (P _{CCA_DL})DL CCA probability P _{CCA_DL}			3 1,2,3	CCR.1.1 CCA 0.9375			CCR.2.1 TDD N/A			
DL CCA probability for dynamic channel access (P _{CCA_DL_1})			1,2,3	0.75			N/A			
DL CCA probability for dynamic channel access (P _{CCA_DL_2})			1,2,3	0.75			N/A			
UL CCA probability for semi-static channel access P _{CCA_UL}			1,2,3	0.75			N/A			
UL CCA probability for dynamic static channel access P _{CCA_UL}			1,2,3	0.87						
TRS configuration			1	TRS.1.2 TDD			TRS.1.1 FDD			
			2	TRS.1.2 TDD			TRS.1.1 TDD			
			3	TRS.1.2 TDD			TRS.1.2 TDD			
OCNG Patterns				OP.1						
SMTC Configuration				SMTC.1						
SSB Configuration	Semi-static channel access		1,2	SSB.1 CCA (As defined in A.3.10A)			SSB.1 FR1			
	Dynamic channel access			SSB.2 CCA (As defined in A.3.10A)						
	Semi-static channel access		3	SSB.1 CCA (As defined in A.3.10A)			SSB.2 FR1			
	Dynamic channel access			SSB.2 CCA (As defined in A.3.10A)						
DBT window configuration				As defined in A.3.28.1			Not applicable			
PDSCH/PDCCH subcarrier spacing		kHz	1,2	30 kHz			15 kHz			
			3	30 kHz			30 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	1,2	30 kHz			15 kHz			
			3	30 kHz			30 kHz			
PRACH configuration				FR1 PRACH configuration 1 under CCA			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		1,2,3	DLBWP.0.1						
	Dedicated DL BWP		1,2,3	DLBWP.1.1						
	Initial UL BWP		1,2,3	ULBWP.0.1						
	Dedicated UL BWP		1,2,3	ULBWP.1.1						
EPRE ratio of PSS to SSS		dB	1,2,3	0						
EPRE ratio of PBCH DMRS to SSS			1,2,3							
EPRE ratio of PBCH to PBCH DMRS			1,2,3							
EPRE ratio of PDCCH DMRS to SSS			1,2,3							
EPRE ratio of PDCCH to PDCCH DMRS			1,2,3							
EPRE ratio of PDSCH DMRS to SSS			1,2,3							
EPRE ratio of PDSCH to PDSCH			1,2,3							
EPRE ratio of OCNG DMRS to SSS ^{Note1}			1,2,3							
EPRE ratio of OCNG to OCNG DMRS ^{Note1}			1,2,3							
N _{oc} ^{Note2}		dBm/15 kHz	1,2	-98			-98			
			3	-98			-98			
N _{oc} ^{Note2}		dBm/S CS	1,2	-95			-98			
			3	-95			-95			
$\hat{E}_s/I_{ot}$		dB	1,2,3	8	-3.3	-3.3	-Infinity	2.36	2.36	
$\hat{E}_s/N_{oc}$		dB	1,2,3	8	8	8	-Infinity	11	11	

SSB_RP	dBm/S CS	1,2	-87	-87	-87	-Infinity	-87	-87
		3	-87	-87	-87	-Infinity	-84	-84
I_o^{Note3}	dBm/C hBW	1,2	-55.31	-55.31	-55.31	-70.05	-58.72	-58.72
		3	-55.31	-55.31	-55.31	-63.94	-52.61	-52.61
Propagation condition	-	1,2,3	AWGN			AWGN		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.							

A.11.2.1.4.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 112 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{\text{interrupt}}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{\text{interrupt}}$ = 102 ms in the test. $T_{\text{interrupt}}$ is defined in clause 6.1.1.2.2.

This gives a total of 112 ms.

A.11.2.1.5 Inter-frequency handover from FR1 carrier under CCA to FR1; unknown target cell

A.11.2.1.5.1 Test Purpose and Environment

This test is to verify the requirement for the NR with CCA FR1-NR FR1 handover requirements specified in clause 6.1.1.2.

A.11.2.1.5.2 Test Parameters

Supported test configurations are shown in table A.11.2.1.5.2-1. Both handover delay and interruption length are tested by using the parameters in table A.11.2.1.5.2-2, and A.12.2.1.7.2-3.

The test scenario comprises of two carriers and one cell on each carrier. Cell 1 is the NR with CCA cell and Cell 2 is an NR neighbour cell. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2.

Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.11.2.1.5.2-1: Handover from NR with CCA FR1 to NR FR1 test configuration

Config	Description
1	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

3	Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
	Source cell: NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
	Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.2.1.5.2-2: General test parameters handover from NR with CCA FR1 to NR FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	NR cell with CCA
	Neighbouring cell		Cell 2	NR cell
Final condition	Active cell		Cell 2	
DL CCA model			As specified in clause A.3.26.2.1	
UL CCA model			As specified in clause A.3.26.2.2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T304		ms	500	
L _{CCA_DL}			5	
W _{CCA_DL}		ms	T304	
L _{CCA_UL}			5	
W _{CCA_UL}		ms	T304	
Time offset between cells			3 μ s	Synchronous cells
T1		s	5	
T2		s	≤ 5	

Table A.11.2.1.5.2-3: Cell specific test parameters for NR with CCA FR1 – NR FR1 handover test case

Parameter	Unit	Configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		1, 2, 3	1		2	
Duplex mode		1	TDD		FDD	
		2	TDD		TDD	
		3	TDD		TDD	
DL CCA model		1, 2, 3	As specified in clause A.3.26.2.1		N/A	
UL CCA model		1, 2, 3	As specified in clause A.3.26.2.2			
TDD configuration		1	TDDConf.1.1 CCA		Not Applicable	
		2	TDDConf.1.1 CCA		TDDConf.1.1	
		3	TDDConf.1.1 CCA		TDDConf.2.1	
BW _{channel}	MHz	1	40: N _{RB,c} = 106		10: N _{RB,c} = 52	
		2	40: N _{RB,c} = 106		10: N _{RB,c} = 52	
		3	40: N _{RB,c} = 106		40: N _{RB,c} = 106	
BWP BW	MHz	1	40: N _{RB,c} = 106		10: N _{RB,c} = 52	
		2	40: N _{RB,c} = 106		10: N _{RB,c} = 52	
		3	40: N _{RB,c} = 106		40: N _{RB,c} = 106	
DRX Cycle	ms		Not Applicable			
PDSCH Reference measurement channel		1	SR.1.1 CCA		SR.1.1 FDD	
		2	SR.1.1 CCA		SR.1.1 TDD	
		3	SR.1.1 CCA		SR2.1 TDD	
CORESET Reference Channel		1	CR2.1 TDD		CR.1.1 FDD	
		2	CR2.1 TDD		CR.1.1 TDD	
		3	CR2.1 TDD		CR2.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.1.1 CCA		CCR.1.1 FDD	
		2	CCR.1.1 CCA		CCR.1.1 TDD	

		3	CCR.1.1 CCA	CCR.2.1 TDD
TRS configuration		1	TRS.1.2 TDD	TRS.1.1 FDD
		2	TRS.1.2 TDD	TRS.1.1 TDD
		3	TRS.1.2 TDD	TRS.1.2 TDD
DL CCA probability for semi-static channel access (P_{CCA_DL})DL CCA probability P_{CCA_DL}		1, 2, 3	0.9375	N/A
DL CCA probability for dynamic channel access ($P_{CCA_DL_1}$)		1, 2, 3	0.75	N/A
DL CCA probability for dynamic channel access ($P_{CCA_DL_2}$)		1, 2, 3	0.75	N/A
UL CCA probability for semi-static channel access P_{CCA_UL}		1, 2, 3	0.75	N/A
UL CCA probability for dynamic static channel access P_{CCA_UL}		1, 2, 3	0.87	N/A
OCNG Patterns		1, 2, 3	OP.1	
SMTC Configuration		1, 2, 3	SMTC.1	
DBT window configuration		1, 2, 3	As defined in A.3.28.1	N/A
SSB configuration	Semi-static channel access	1,2	SSB.1 CCA (As defined in A.3.10A)	SSB.1 FR1
	Dynamic channel access		SSB.2 CCA (As defined in A.3.10A)	
	Semi-static channel access	3	SSB.1 CCA (As defined in A.3.10A)	SSB.2 FR1
	Dynamic channel access		SSB.2 CCA (As defined in A.3.10A)	
ssb-PositionQCL			1	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1	30 kHz	15 kHz
		2	30 kHz	15 kHz
		3	30 kHz	30 kHz
PUCCH/PUSCH subcarrier spacing	kHz	1	30 kHz	15 kHz
		2	30 kHz	15 kHz
		3	30 kHz	30 kHz
PRACH configuration		1,2,3	FR1 PRACH configuration 1 under CCA	FR1 PRACH configuration 1
BWP configuration	Initial DL BWP	1,2,3	DLBWP.0.1	
	Dedicated DL BWP	1,2,3	DLBWP.1.1	
	Initial UL BWP	1,2,3	ULBWP.0.1	
	Dedicated UL BWP	1,2,3	ULBWP.1.1	
EPRE ratio of PSS to SSS	dB	1,2,3	0	
EPRE ratio of PBCH DMRS to SSS		1,2,3		
EPRE ratio of PBCH to PBCH DMRS		1,2,3		
EPRE ratio of PDCCH DMRS to SSS		1,2,3		
EPRE ratio of PDCCH to PDCCH DMRS		1,2,3		
EPRE ratio of PDSCH DMRS to SSS		1,2,3		
EPRE ratio of PDSCH to PDSCH		1,2,3		
EPRE ratio of OCNG DMRS to SSS ^{Note1}		1,2,3		

EPRE ratio of OCNG to OCNG DMRS ^{Note1}		1,2,3				
N_{oc} ^{Note2}	dBm/SCS	1,2	-95		-98	
		3	-95		-95	
$\hat{E}_s / I_{ot}$	dB	1,2,3	4	4	- Infinity	5
$\hat{E}_s / N_{oc}$	dB	1,2,3	4	4	- Infinity	5
SSB_RP	dBm/SCS	1,2	-91	-91	- Infinity	-93
		3	-91	-91	- Infinity	-90
I_o ^{Note3}	dBm/ 9.36MHz	1,2,3	-70.05	-63.85	-64.59	- 64.59
	dBm/ 38.16MHz	1,2,3	-63.94	-57.75	-58.49	- 58.49
Propagation condition	-	1,2,3	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.						

A.11.2.1.5.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 132 ms from the beginning of time period T2. The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 122 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.2.2.

This gives a total of 132 ms.

A.11.2.1.6 Inter-frequency handover from FR1 to FR1 carrier under CCA; unknown target cell

A.11.2.1.6.1 Test Purpose and Environment

This test is to verify the requirement for inter frequency handover requirements from FR1 to FR1 carrier under CCA specified in clause 6.1B.1.2.

A.11.2.1.6.2 Test Parameters

Supported test configurations are shown in table A.11.2.1.6.2-1. Both handover delay and interruption length are tested by using the parameters in table A.11.2.1.6.2-2, and A.11.2.1.6.2-3.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and

the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.11.2.1.6.2-1: Inter-frequency handover from FR1 to FR1 carrier under CCA test configurations

Configuration	Description of a cell with CCA	Description of a cell without CCA
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.11.2.1.6.2-2: General test parameters Inter-frequency handover from FR1 to FR1 carrier under CCA

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	On the carrier under CCA
Final condition	Active cell	Cell 2	On the carrier under CCA
DL CCA model		As specified in clause A.3.26.2.1	
UL CCA model		As specified in clause A.3.26.2.2	
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
T304	ms	500	
L _{CCA_DL}		5	
W _{CCA_DL}	ms	T304	
L _{CCA_UL}		5	
W _{CCA_UL}	ms	T304	
T1	s	5	
T2	s	≤ T _{interrupt}	T _{interrupt} is defined in clause 6.1B.1.2

Table A.11.2.1.6.2-3: Cell specific test parameters for NR FR1-FR1 Inter frequency handover test case

Parameter	Unit	Configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		1, 2, 3	1		2	
DL CCA probability for semi-static channel access (P _{CCA_DL})DL CCA probability P _{CCA_DL}		1, 2, 3	N/A		0.9375	
DL CCA probability for dynamic channel access (P _{CCA_DL_1})		1, 2, 3	N/A		0.75	
DL CCA probability for dynamic channel access (P _{CCA_DL_2})		1, 2, 3	N/A		0.75	
UL CCA probability for semi-static channel access P _{CCA_UL}		1, 2, 3	N/A		0.75	
UL CCA probability for dynamic static channel access P _{CCA_UL}		1, 2, 3	N/A		0.87	
TDD configuration		1	N/A		TDDConf.1.1.CCA	
		2	TDDConf.1.1		TDDConf.1.1.CCA	
		3	TDDConf.1.2		TDDConf.1.1.CCA	
BW _{channel}		1	10: N _{RB,c} = 52		40: N _{RB,c} = 106	

BWP BW		ms	2	10: $N_{RB,c} = 52$	40: $N_{RB,c} = 106$
			3	40: $N_{RB,c} = 106$	40: $N_{RB,c} = 106$
			1	10: $N_{RB,c} = 52$	40: $N_{RB,c} = 106$
			2	10: $N_{RB,c} = 52$	40: $N_{RB,c} = 106$
			3	40: $N_{RB,c} = 106$	40: $N_{RB,c} = 106$
DRX Cycle		ms		Not Applicable	
PDSCH Reference			1	SR.1.1 FDD	SR.1.1 CCA
			2	SR.1.1 TDD	SR.1.1 CCA
			3	SR.2.1 TDD	SR.1.1 CCA
CORESET Reference Channel			1	CR.1.1 FDD	CR.1.1 CCA
			2	CR.1.1 TDD	CR.1.1 CCA
			3	CR.2.1 TDD	CR.1.1 CCA
Dedicated CORESET RMC configuration			1	CCR.1.1 FDD	CCR.1.1 CCA
			2	CCR.1.1 TDD	CCR.1.1 CCA
			3	CCR.2.1 TDD	CCR.1.1 CCA
TRS configuration			1	TRS.1.1 FDD	TRS.1.2 TDD
			2	TRS.1.1 TDD	TRS.1.2 TDD
			3	TRS.1.2 TDD	TRS.1.2 TDD
OCNG Patterns			1, 2, 3	OP.1	
SMTC Configuration			1, 2, 3	SMTC.1	
DBT window configuration			1, 2, 3	N/A	As defined in A.3.28.1
SSB configuration			1, 2	SSB.1 FR1	SSB.1 CCA for semi-static channel access; SSB.2 CCA for dynamic channel access;
			3		SSB.2 FR1
			ssb-PositionQCL		
PDSCH/PDCCH subcarrier spacing		kHz	1	15 kHz	30 kHz
			2	15 kHz	30 kHz
			3	30 kHz	30 kHz
PUCCH/PUSCH subcarrier spacing		kHz	1	15 kHz	30 kHz
			2	15 kHz	30 kHz
			3	30 kHz	30 kHz
PRACH configuration				FR1 PRACH configuration 1	FR1 PRACH configuration 1 CCA
BWP configuration	Initial DL BWP		1, 2, 3	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3	DLBWP.1.1	
	Initial UL BWP		1, 2, 3	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3	ULBWP.1.1	
EPRE ratio of PSS to SSS		dB		0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					

EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}		dBm/15kHz		-98			
N_{oc}^{Note2}		dBm/SCS	1, 2	-98		-95	
			3	-95		-95	
$\hat{E}_s/I_{ot}$		dB		4	4	-Infinity	5
$\hat{E}_s/N_{oc}$		dB		4	4	-Infinity	5
SSB_RP	Config 1	dBm/SCS	1, 2	-94	-94	-Infinity	-90
			3	-91	-91	-Infinity	-90
I_o^{Note3}	Config 1	dBm/ 9.36MHz	1, 2	- 64.59	- 64.59	-63.94	-57.75
		dBm/ 38.16MHz	3	- 58.49	- 58.49	-63.94	-57.75
Propagation condition		-		AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.							

A.11.2.1.6.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than $T_{interrupt}$ from the beginning of time period T3, where $T_{interrupt}$ is defined in clause 6.1B.1.2

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin}$$

$$T_{search} = (3 + L_1) * 20 \text{ ms.}$$

$$T_{processing} = 20 \text{ ms.}$$

$$T_{margin} = 2 \text{ ms.}$$

$$T_{\Delta} = (1 + L_2) * 20 \text{ ms.}$$

$$T_{IU} = (1 + L_3) * 10 + 10 \text{ ms}$$

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2], L_1' is the number of SMTC occasions not available at the UE during the inter-frequency detection period, L_2 is the number of SMTC occasions not available at the UE during the time tracking period, and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33]. The interruption time considering the potential extensions caused by L_1, L_1', L_2, L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2].

A.11.2.1.7 SA NR FR1 carrier under CCA - E-UTRAN handover with known target cell

A.11.2.1.7.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1 carrier under CCA. This test shall verify the NR to E-UTRAN handover requirements as specified in clause 6.1.2.1.

The test comprises of one NR carrier under CCA and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the next instant after the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.11.2.1.7-1. General test parameters are provided in Table A.11.2.1.7-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.11.2.1.7-3 and A.11.2.1.7-4 respectively.

Table A.11.2.1.7-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description of a cell with CCA	Description of a cell without CCA
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.		
Note 2: The UE supporting SA operation only on NR band(s) with shared spectrum access is required to be tested.		

Table A.11.2.1.7-2: General test parameters for SA inter-RAT E-UTRAN handover

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell	Cell 1	NR cell on a carrier under CCA
	Neighbouring cell	Cell 2	E-UTRAN cell
Final condition	Active cell	Cell 2	
DL CCA model		As specified in clause A.3.26.2.1	
UL CCA model		As specified in clause A.3.26.2.2	
NR measurement quantity		SS-RSRP	
E-UTRAN measurement quantity		RSRP	
b2-Threshold1	dBm	As specified in Table A.11.2.1.7-3	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2EUTRAN	dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	

T304	ms	500	
LCCA_DL		5	
W _{CCA_DL}	ms	T304	
LCCA_UL		5	
W _{CCA_UL}	ms	T304	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure
Time offset between cells		3 ms	Asynchronous cells
Gap pattern configuration Id		0	As specified in Table 9.1.2-1 started before T2 starts
T1	s	5	
T2	s	≤5	
T3	s	1	

Table A.11.2.1.7-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2	1		
TDD Configuration			1, 2	TDDConf.1.1.CCA		
DL CCA probability for semi-static channel access (P _{CCA_DL})DL CCA probability P _{CCA_DL}			1, 2	0.9375		
DL CCA probability for for dynamic static channel access (P _{CCA_DL_1})			1, 2	0.75		
DL CCA probability for for dynamic static channel access (P _{CCA_DL_2})			1, 2	0.75		
UL CCA probability for semi-static channel access P _{CCA_UL}			1, 2	0.75		
UL CCA probability for dynamic static channel access P _{CCA_UL}			1, 2	0.87		
BW _{channel}			1, 2	40: N _{RB,C} = 106 (TDD)		
PDSCH reference measurement channel			1, 2	SR.1.1 CCA		
CORESET reference channel			1, 2	CR.1.1 CCA		
Dedicated CORESET RMC configuration			1, 2	CCR.1.1 CCA		
TRS configuration			1, 2	TRS.1.2 TDD		
OCNG pattern ^{Note1}			1, 2	OP.1		
BWP	Initial DL BWP		1, 2	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTc configuration			1, 2	SMTc.1		
DBT window configuration			1, 2	As defined in A.3.28.1		
SSB configuration			1, 2	SSB.1 CCA for semi-static channel access; SSB.2 CCA for dynamic channel access;		
b2-Threshold1		dBm	1, 2	-93		

EPRE ratio of PSS to SSS	dB	1, 2	0		
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} ^{Note2}	dBm/15 KHz	1, 2	-100	-104	-100
N_{oc} ^{Note2}	dBm/SCS	1, 2	-97	-101	-97
$\hat{E}_s/N_{oc}$	dB	1, 2	12	0	0
$\hat{E}_s/I_{ot}$ ^{Note3}	dB	1, 2	12	0	0
SS-RSRP ^{Note3}	dBm/SCS	1, 2	-85	-101	-97
I_o ^{Note3}	dBm/38.16 MHz	1, 2	-53.68	-66.93	-62.93
Propagation condition		1, 2	AWGN		
Antenna Configuration and Correlation Matrix		1, 2	1x2 Low		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.					

Table A.11.2.1.7-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2	2		
Duplex mode		1	FDD		
		2	TDD		
TDD special subframe configuration ^{Note1}		2	6		
TDD uplink-downlink configuration ^{Note1}		2	1		
BW _{channel}	MHz	1, 2	10 MHz: $N_{RB,C} = 50$		
PRACH Configuration ^{Note2}		1	4		
		2	53		
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1	10 MHz: R.3 FDD		
		2	10 MHz: R.0 TDD		

PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1	10 MHz: R.6 FDD		
		2	10 MHz: R.6 TDD		
OCNG Patterns ^{Note3}		1	10 MHz: OP.10 FDD		
		2	10 MHz: OP.1 TDD		
PBCH_RA	dB	1, 2	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note4}					
OCNG_RB ^{Note4}					
N _{oc} ^{Note5}	dBm/15kHz	1, 2	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	8	8
$\hat{E}_s/I_{ot}$ ^{Note6}	dB	1, 2	-Infinity	8	8
RSRP ^{Note6}	dBm/15kHz	1, 2	-Infinity	-90	-90
SCH_RP ^{Note6}	dBm/15kHz	1, 2	-Infinity	-90	-90
I _o ^{Note6}	dBm/9MHz	1, 2	-67.21 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)
Propagation Condition		1, 2	AWGN		
Antenna Configuration and Correlation Matrix ^{Note7}		1, 2	1x2 Low		
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].					
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].					
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.					
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.					
Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].					

A.11.2.1.7.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 85 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + T_{interrupt}, where:

RRC procedure delay = 50 ms and is specified in clause 6.1.2.1.

$T_{\text{interrupt}} = 35 \text{ ms}$ in the test; $T_{\text{interrupt}}$ is defined in clause 6.1.2.1.

This gives a total of 85 ms.

A.11.2.1.8 SA NR FR1 carrier under CCA - E-UTRAN handover with unknown target cell

A.11.2.1.8.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1 carrier under CCA. This test shall verify the NR to E-UTRAN handover requirements for the case when the target E-UTRAN cell is unknown as specified in clause 6.1.2.1.

The test comprises of one NR carrier under CCA and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable. No Gap pattern shall be configured.

A RRC message implying handover shall be sent to the UE during period T1. The start of T2 is the next instant after the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.11.2.1.8-1. General test parameters are provided in Table A.11.2.1.8-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.11.2.1.8-3 and A.11.2.1.8-4 respectively.

Table A.11.2.1.8-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description of a cell with CCA	Description of a cell without CCA
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.		
Note 2: The UE supporting SA operation only on NR band(s) with shared spectrum access is required to be tested.		

Table A.11.2.1.8-2: General test parameters for SA inter-RAT E-UTRAN handover

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell	Cell 1	NR cell on a carrier under CCA
	Neighbouring cell	Cell 2	E-UTRAN cell
Final condition	Active cell	Cell 2	
DL CCA model		As specified in clause A.3.26.2.1	
UL CCA model		As specified in clause A.3.26.2.2	
NR measurement quantity		SS-RSRP	
DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure

T304	ms	500	
L _{CCA_DL}		5	
W _{CCA_DL}	ms	T304	
L _{CCA_UL}		5	
W _{CCA_UL}	ms	T304	
Time offset between cells		3 ms	Asynchronous cells
T1	s	≤5	
T2	s	1	

Table A.11.2.1.8-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2	1	
DL CCA probability for semi-static channel access (P _{CCA_DL})DL CCA probability P _{CCA_DL}			1, 2	0.9375	
DL CCA probability for dynamic channel access (P _{CCA_DL 1})			1, 2	0.75	
DL CCA probability for dynamic channel access (P _{CCA_DL 2})			1, 2	0.75	
UL CCA probability for semi-static channel access P _{CCA_UL}			1, 2	0.75	
UL CCA probability for dynamic static channel access P _{CCA_UL}			1, 2	0.87	
TDD Configuration			1, 2	TDDConf.1.1.CCA	
BW _{channel}		MHz	1, 2	40: N _{RB,C} = 106 (TDD)	
PDSCH reference measurement channel			1, 2	SR.1.1 CCA	
CORESET reference channel			1, 2	CR.1.1 CCA	
Dedicated CORESET RMC configuration			1, 2	CCR.1.1 CCA	
TRS configuration			1, 2	TRS.1.2 TDD	
OCNG pattern ^{Note1}			1, 2	OP.1	
BWP	Initial DL BWP		1, 2	DLBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	
	Initial UL BWP			ULBWP.0.1	
	Dedicated UL BWP			ULBWP.1.1	
SMTC configuration			1, 2	SMTC.1	
DBT window configuration			1, 2	As defined in A.3.28.1	
SSB configuration			1, 2	SSB.1 CCA for semi-static channel access; SSB.2 CCA for dynamic channel access;	
EPRE ratio of PSS to SSS		dB	1, 2	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					

EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc}^{Note2}	dBm/15 KHz	1, 2	-98
N_{oc}^{Note2}	dBm/SCS	1, 2	-95
$\hat{E}_s/N_{oc}$	dB	1, 2	0
$\hat{E}_s/I_{ot}^{Note3}$	dB	1, 2	0
SS-RSRP ^{Note3}	dBm/SCS	1, 2	-95
I_o^{Note3}	dBm/38.16 MHz	1, 2	-60.94
Propagation condition		1, 2	AWGN
Antenna Configuration and Correlation Matrix		1, 2	1x2 Low
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.			

Table A.11.2.1.8-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2	2	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration ^{Note1}		2	6	
TDD uplink-downlink configuration ^{Note1}		2	1	
BW _{channel}	MHz	1, 2	10 MHz: $N_{RB,c} = 50$	
PRACH Configuration ^{Note2}		1	4	
		2	53	
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1	10 MHz: R.3 FDD	
		2	10 MHz: R.0 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1	10 MHz: R.6 FDD	
		2	10 MHz: R.6 TDD	
OCNG Patterns ^{Note3}		1	10 MHz: OP.10 FDD	
		2	10 MHz: OP.1 TDD	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				

PDSCH_RA			
PDSCH_RB			
OCNG_RA ^{Note4}			
OCNG_RB ^{Note4}			
N_{oc} ^{Note5}	dBm/15kHz	1, 2	-98
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity 7
$\hat{E}_s/I_{ot}$ ^{Note6}	dB	1, 2	-Infinity 7
RSRP ^{Note6}	dBm/15kHz	1, 2	-Infinity -91
SCH_RP ^{Note6}	dBm/15kHz	1, 2	-Infinity -91
I_o ^{Note6}	dBm/9MHz	1, 2	-70.22 -62.43
Propagation Condition		1, 2	AWGN
Antenna Configuration and Correlation Matrix ^{Note7}		1, 2	1x2 Low
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23]. Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23]. Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively. Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].			

A.11.2.1.8.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 165 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in clause 6.1.2.1.

$T_{interrupt}$ = 115 ms in the test; $T_{interrupt}$ is defined in clause 6.1.2.1.

This gives a total of 165 ms.

A.11.2.1.9 Handover with PSCell from NR SA to EN-DC with known target PSCell using CCA

A.11.2.1.9.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct SA inter-RAT handover from NR to E-UTRAN with FR1 PSCell addition when operating in standalone (SA) operation with PCell in FR1, for the case where the PSCell is known to the UE at the time of addition and SMTC of target known PSCell is not present in *RRCConnectionReconfiguration*. This test shall verify delay requirements of inter-RAT handover from NR to E-UTRAN and FR1 PSCell carrier with CCA addition as specified in clause 6.1.5.

The test comprises of two NR cells and one E-UTRA cell. Cell 1 is the NR PCell, Cell 2 is an inter-RAT E-UTRAN neighbour cell and Cell 3 is the target NR PSCell, which is on CCA, on radio channel 1 in FR1, radio channel 2 in E-UTRAN and radio channel 3 in FR1 with CCA, respectively.

In this test, inter-RAT handover from NR to E-UTRAN and FR1 PSCell addition are performed in parallel processing. The test consists of successive time periods for inter-RAT handover with time durations of T1, T2 and T3 respectively, and successive time periods for FR1 PSCell addition with time durations of T1', T2', T3' and T4' respectively.

At the start of time duration T1, the UE does not have any timing information of Cell 2, and the UE is only monitoring Cell 1. During T1, only Cell1 is known to the UE.

Before the start of T2 or T2', the test system shall send measurement control information including measurement gap configuration and event-triggered reporting configuration with event B2 for neighbour Cell 2 and event B1 for Cell 3. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 or T2' begins.

Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

During T3, the UE shall carry out random access (i.e., transmit the PRACH) towards the Cell 2. Reception by the test system of the PRACH preamble defines the end of T3.

Starting T2', the Cell 3 (PSCell-to-be) on radio channel 3 becomes known to the UE at the time of addition. Therefore, during T2' the UE shall report Event B1. After receiving the Event B1, the test system shall send a RRC message to the UE to release the measurement gaps. The test system shall send a RRC message to the UE to add PSCell (Cell 3) on radio channel 3. The RRC message (to add PSCell) also includes a request for the UE to start periodic CSI reporting for the PSCell after the PSCell has been successfully added. The RRC message to add PSCell shall be sent to the UE during period T2', after the measurement gaps are released by the test system. The point in time at which the RRC message to add PSCell (Cell 3) is received at the UE antenna connector defines the start of period T3'.

During T3', the UE shall carry out random access (i.e., transmit the PRACH) towards the Cell 3. Reception by the test system of the PRACH preamble defines the start of period T4'.

During T4', the UE shall send periodic CSI reports in PSCell and the test system shall observe the periodic reporting of CSI for PSCell.

Supported test configurations are shown in table A.11.2.1.9.1-1. General test parameters are provided in Table A.11.2.1.9.1-2. Cell specific test parameters for NR Cell 1, E-UTRAN PCell Cell 2 are provided in Tables A.11.2.1.9.1-3, A.11.2.1.9.1-4 and A.11.2.1.xn-5 respectively. Table A.11.2.1.9.1-5 provides General test parameters for NR FR1 PSCell carrier with CCA addition, and Table A.11.2.1.9.1-6 provides Cell specific test parameters for PSCell addition of FR1 carrier under CCA.

Table A.11.2.1.9.1-1: Supported test configurations for SA inter-RAT E-UTRAN handover with FR1 PSCell addition tests

Config	Description	
	NR PCell and EUTRA PCell	NR PSCell on CCA
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD, LTE FDD,	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD, LTE FDD	
3	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD, LTE FDD	
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD, LTE TDD	
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD, LTE TDD	
6	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD, LTE TDD	
Note:	The UE is only required to be tested in one of the supported test configurations depending on the UE capability	

Table A.11.2.1.9.1-2: General test parameters for SA inter-RAT E-UTRAN handover with FR1 PSCell addition

Parameter		Unit	Value	Comment
NR RF Channel Number			1, 3	2 NR carrier frequency is used in the test
LTE RF Channel Number			2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell		Cell 1	NR cell
	Neighbouring cell		Cell 2, 3	E-UTRAN cell and NR cell in FR1
Final condition	Active Pcell		Cell 2	E-UTRAN cell
	Active PSCell		Cell 3	NR cell in FR1
NR measurement quantity			SS-RSRP	
E-UTRAN measurement quantity			RSRP	
Event B1	Hysteresis	dB	0	Hysteresis for evaluation of event B1.
	Threshold RSRP	dBm	-93	Actual RSRP threshold for event B1. Needs to take absolute accuracy tolerance in clause 9.1.11.1 into account plus margin.
	Time to Trigger	S	0	
Event B2	Threshold1	dBm	As specified in Table A.6.3.1.4-3	Absolute NR SS-RSRP threshold for event B2
	Threshold2EUTRAN	dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
	Hysteresis	dB	0	
	TimeToTrigger	s	0	
Filter coefficient			0	L3 filtering is not used
DRX			OFF	Non-DRX test
Access Barring Information		-	Not sent	No additional delays in random access procedure
Time offset between cell 1 and cell 2			3 ms	Asynchronous cells
Measurement Gap pattern ID			0	As specified in Table 9.1.2-1
T1/T1'		s	1	During this time only Cell 1 is known to UE.
T2		s	≤5	During this time the UE shall identify Cell 2 and report event B2.
T3		s	1	During this time the UE handovers to Cell 2.
T2'		s	≤ 5	During this time the UE shall identify Cell 3 and report event B1.
T3'		s	≥ T _{interrupt}	During this time the UE adds the PSCell (Cell 3).
T4'		s	≤ 1	During this time the UE sends CSI reports for PSCell (Cell 3).

Table A.11.2.1.9.1-3: Cell specific test parameters for SA inter-RAT E-UTRA handover with FR1 PSCell addition (NR Cell 1)

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	1		
Duplex mode		1, 4	FDD		
		2, 3, 5, 6	TDD		
TDD Configuration		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
BW _{channel}	MHz	1, 4	10: N _{RB,c} = 52 (FDD)		
		2, 5	10: N _{RB,c} = 52 (TDD)		
		3, 6	40: N _{RB,c} = 106 (TDD)		

PDSCH reference measurement channel			1, 4	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
TRS configuration			1, 4	TRS.1.1 FDD		
			2, 5	TRS.1.1 TDD		
			3, 6	TRS.1.2 TDD		
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6	OP.1		
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration			1, 2, 4, 5	SSB.1 FR1		
			3, 6	SSB.2 FR1		
b2-Threshold1		dBm	1, 2, 4, 5	-96		
			3, 6	-93		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc} ^{Note2}						
N_{oc} ^{Note2}		dBm/SCS	1, 2, 4, 5	-100	-104	-100
			3, 6	-97	-101	-97
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6	12	0	-4
$\hat{E}_s/I_{ot}$ ^{Note3}		dB	1, 2, 3, 4, 5, 6	12	0	-4
SS-RSRP ^{Note3}		dBm/SCS	1, 2, 4, 5	-88	-104	-104
			3, 6	-85	-101	-101
I_o ^{Note3}		dBm/9.36 MHz	1, 2, 4, 5	-59.78	-73.04	-70.59
		dBm/38.16 MHz	3, 6	-53.68	-66.9448	-64.49
Propagation condition			1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6	1x2 Low		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

Table A.11.2.1.9.1-4: Cell specific test parameters for SA inter-RAT E-UTRA handover with FR1 PSCell addition (E-UTRA Cell 2)

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	2		
Duplex mode		1, 2, 3	FDD		
		4, 5, 6	TDD		
TDD special subframe configuration ^{Note1}		4, 5, 6	6		
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1		
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100		
PRACH Configuration ^{Note2}		1, 2, 3	4		
		4, 5, 6	53		
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		4, 5, 6	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		4, 5, 6	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns ^{Note3}		1, 2, 3	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		4, 5, 6	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note4}					
OCNG_RB ^{Note4}					
N _{oc} ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	-Infinity	8	78
$\hat{E}_s/I_{ot}$ ^{Note6}	dB	1, 2, 3, 4, 5, 6	-Infinity	78	78
RSRP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-90	-90
SCH_RP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-90	-90
I ₀ ^{Note6}	dBm/9MHz	1, 2, 3, 4, 5, 6	-67.21 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)

Propagation Condition		1, 2, 3, 4, 5, 6	AWGN
Antenna Configuration and Correlation Matrix Note 7		1, 2, 3, 4, 5, 6	1x2 Low
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23]. Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23]. Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively. Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].			

Table A.11.2.1.9.1-5: General test parameters for NR FR1 PSCell carrier with CCA addition

Parameter		Unit	Value	Comment
Initial condition	Neighbouring cell		Cell 3	On the carrier under CCA
Final condition	Active cell		Cell 3	On the carrier under CCA
DL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.20.2.1	
	Semi-static channel access Note 2, 3			
UL CCA model	Dynamic channel access Note 1, 3		As specified in clause A.3.20.2.2	
	Semi-static channel access Note 2, 3			
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μ s	Synchronous cells
T304		ms	500	
L _{CCA_DL}			5	
W _{CCA_DL}		ms	T304	
L _{CCA_UL}			5	
W _{CCA_UL}		ms	T304	
T1'		s	5	
T2'		s	≤ 5	
T3'		s	$\geq T_{interrupt}$	$T_{interrupt}$ is defined in clause 6.1B.1.2
T4'		s	≤ 1	
Note 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.2.1.9.1-6: Cell specific test parameters for PSCell addition of FR1 carrier under CCA

Parameter	Unit	Cell 3			
		T1'	T2'	T3'	T4'
NR RF Channel Number		1			
P _{CCA_DL} for dynamic channel access Note 4,6	-	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75			

P _{CCA_DL} for semi-static channel access ^{Note 5,6}		-	P _{CCA_DL} =0.9375			
P _{CCA_UL} for dynamic channel access ^{Note 4,6}		-	0.75			
P _{CCA_UL} for semi-static channel access ^{Note 5,6}		-	0.87			
TDD configuration	Config 1, 2, 3, 4, 5, 6		TDDConf.1.1 CCA			
BW _{channel}	Config 1, 2, 3, 4, 5, 6		40: N _{RB,c} = 106			
BWP BW	Config 1, 2, 3, 4, 5, 6		40: N _{RB,c} = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference	Config 1, 2, 3, 4, 5, 6		SR.1.1 CCA			
CORESET Reference Channel	Config 1, 2, 3, 4, 5, 6		CR.1.1 CCA			
Dedicated CORESET RMC configuration	Config 1, 2, 3, 4, 5, 6		CCR.1.1 CCA			
TRS configuration	Config 1, 2, 3, 4, 5, 6		TRS.1.1 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
DBT window configuration	Config 1, 2, 3, 4, 5, 6		DBT.1			
SSB configuration for semi-static channel access ^{Note 4, 6}	Config 1, 2, 3, 4, 5, 6		SSB.1 CCA			
SSB configuration for dynamic channel access ^{Note 5, 6}	Config 1, 2, 3, 4, 5, 6		SSB.2 CCA			
ssb-PositionQCL	Config 1, 2, 3, 4, 5, 6		1			
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 3, 4, 5, 6	kHz	30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1, 2, 3, 4, 5, 6	kHz	30 kHz			
PRACH configuration			FR1 PRACH configuration 1 under CCA			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N _{oc} ^{Note2}		dBm/15kHz	-98			
N _{oc} ^{Note2}	Config 1, 2, 3, 4, 5, 6	dBm/SCS	-95			
Ê _s /I _{ot}		dB	-∞	2.36	2.36	2.36
Ê _s /N _{oc}		dB	-∞	11	11	11
SSB RP	Config 1, 2, 3, 4, 5, 6	dBm/SCS	-∞	-84	-84	-84
I _o ^{Note3}	Config 1, 2, 3, 4, 5, 6	dBm/38.16MHz	-55.31	-50.96	-50.96	-50.96

Propagation condition	-	AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.	
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.	
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.	
Note 4:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.	
Note 5:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.	
Note 6:	For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.	

A.11.2.1.9.2 Test Requirements

In this test, the UE shall start to transmit the PRACH to E-UTRA Cell 2 less than 55 ms^{Note1} from the beginning of time period T3.

The above test requirements shall be fulfilled in order of T1, T2, T3 for the observed inter-RAT handover delay from NR to E-UTRAN to be counted as correct, and in order of T1, T2', T3', T4' for the observed PSCell addition delay to be counted as correct.

The rate of correct handovers and correct PSCell addition delay during repeated tests shall be at least 90%.

NOTE1: The handover delay can be expressed as specified in clause 6.1.5.2:

$$D_{\text{HOwithPSCell_PCell}} = \text{RRC procedure delay} + T_{\text{interrupt}},$$

Where RRC procedure delay = 50 ms, and

$T_{\text{interrupt}} = T_{\text{search_HO}} + T_{\text{IU}} + T_{\text{processing}}$ is defined in clause 6.1.5.2.1, where

$$T_{\text{search}} = 0 \text{ ms}$$

$$T_{\text{IU}} = 10 \text{ ms},$$

$$T_{\text{processing}} = 25 \text{ ms}$$

$D_{\text{HOwithPSCell_PCell}}$ is equal to 85ms.

The UE shall transmit the PRACH to PSCell no later than $D_{\text{HOwithPSCell_PCell}}$ from the start of T3'. The UE shall send at least one CSI report for PSCell with non-zero CQI index during T4'. The UE shall periodically send CSI reports for PSCell after the UE has sent first CQI report with non-zero CQI index during T4.

The PSCell addition delay can be expressed as follows as specified in clause 6.1.5.3:

$$D_{\text{HOwithPSCell_PCell}} = T_{\text{RRC_delay}} + T_{\text{processing}} + T_{\text{search_PCell}} + T_{\text{search_PSCell}} + T_{\Delta} + T_{\text{IU_PSCell}} + 2 \text{ ms}$$

Where:

$$T_{\text{RRC_delay}} = 20 \text{ ms}$$

$$T_{\text{processing}} = 25 \text{ ms}$$

$$T_{\text{search_PCell}} = 0$$

$$T_{\text{search_PSCell}} = 0T_{\Delta} = (1 + L_2) * 20 \text{ ms}.$$

$$T_{\text{IU_PSCell}} = (1 + L_3) * 10 + 10 \text{ ms}$$

L_2 is the number of SMTC occasions not available at the UE during the time tracking period where $L_2 \leq L_{CCA_DL}$, and L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure, where $L_3 \leq L_{CCA_UL}$. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33]. The interruption time considering the potential extensions caused by L_1 , L_2 , L_3 and by the UL CCA failure detection/recovery mechanism is limited by the T304 timer. The UE behaviour at the T304 timer expiry is detailed in TS 38.331 [2]. Test equipment should make sure that L_{CCA_DL} and L_{CCA_UL} are not exceeded during a test by monitoring the number of CCA failures and preventing additional CCA failures from happening after L_{CCA_DL} or L_{CCA_UL} is reached.

The rate of correct PSCell addition observed during repeated tests shall be at least 90%.

A.11.2.2 RRC connection mobility control

A.11.2.2.1 RRC re-establishment

A.11.2.2.1.1 Intra-frequency RRC Re-establishment with CCA in FR1

A.11.2.2.1.1.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay with CCA in FR1 with known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1A.

The test parameters are given in table A.11.2.2.1.1.1-1, table A.11.2.2.1.1.1-2 and table A.11.2.2.1.1.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell with CCA, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.11.2.2.1.1.1-1: Supported test configurations

Configuration	Description
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.2.2.1.1.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case with CCA

Parameter		Unit	Value	Comment
Initial Condition	Active cell	-	Cell1	Cell 1 is with CCA.
	Neighbour cells	-	Cell2	Cell 2 is with CCA.
Final condition	Active cell	-	Cell2	
RF Channel Number		-	1	
DL CCA model	Dynamic channel access ^{Note 1, 3}	-	As specified in clause A.3.26.2.1	
	Semi-static channel access ^{Note 2, 3}	-		
UL CCA model	Dynamic channel access ^{Note 1, 3}	-	As specified in clause A.3.26.2.2	
	Semi-static channel access ^{Note 2, 3}	-		
L_{CCA_DL}			5	
W_{CCA_DL}		ms	T311	
L_{CCA_UL}			5	
W_{CCA_UL}		ms	T311	
Time offset between cells		-	3 μ s	Synchronous cells
N310		-	1	Maximum consecutive out-of-sync indications from lower layers

N311		-	1	Minimum consecutive in-sync indications from lower layers
T310		ms	0	Radio link failure timer; T310 is disabled
T311		ms	3000	RRC re-establishment timer
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
SSB configuration	Dynamic channel access ^{Note 1, 3}	-	SSB.2 CCA	Table A.3.10A.1.2-1
	Semi-static channel access ^{Note 2, 3}	-	SSB.1 CCA	Table A.3.10A.1.1-1
DBT window configuration		-	DBT.1	Table A.3.28.1-1
SMTC configuration		-	SMTC pattern 1	
DRX cycle length		s	OFF	
PRACH configuration		-	FR1 PRACH configuration 1 under CCA	Table A.3.8A.2.1-1
T1		s	5	
T2		ms	520	Time for the UE to detect RLF (Summation of T _{Evaluate_out_SSB} defined in clause 8.1A in TS 38.133, T310 and the period for UE turns off transmitter)
T3		s	2	
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.2.2.1.1.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case with CCA

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
TDD configuration	-	TDDConf.1.1 CCA			TDDConf.1.1 CCA		
DL CCA probability $P_{\text{CCA_DL}}$ for dynamic channel access Note 4,6	-	$P_{\text{CCA_DL_1}}=0.75$ $P_{\text{CCA_DL_2}}=0.75$			$P_{\text{CCA_DL_1}}=0.75$ $P_{\text{CCA_DL_2}}=0.75$		
DL CCA probability $P_{\text{CCA_DL}}$ for semi-static channel access Note 5,6	-	$P_{\text{CCA_DL}}=0.9375$			$P_{\text{CCA_DL}}=0.9375$		
UL CCA probability $P_{\text{CCA_UL}}$	-	1			1		
PDSCH RMC configuration		SR.1.1 CCA			SR.1.1 CCA		
RMSI CORESET RMC configuration		CR.1.1 CCA			CR.1.1 CCA		
Dedicated CORESET RMC configuration		CCR.1.1 CCA			CCR.1.1 CCA		
OCNG Pattern		OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		TRS.1.2 TDD			N/A		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
Active DL BWP configuration		DLBWP.1.1	N/A	N/A	N/A	N/A	DLBW P.1.1

Active UL BWP configuration		ULBWP. 1.1	N/A	N/A	N/A	N/A	ULBW P.1.1
RLM-RS		SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1.54	-infinity	-infinity	-3.79	4	4
N_{oc} Note2	dBm/SCS	-95					
N_{oc} Note2	dBm/15 kHz	-98					
$\hat{E}_s/N_{oc}$	dB	7	-infinity	-infinity	4	4	4
SS-RSRP Note3	dBm/SCS	-88	-infinity	-infinity	-91	-91	-91
Io	dBm/38.16 MHz	-54.65	-58.50	-58.50	-54.65	-58.50	-58.50
Propagation Condition		AWGN					
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.							
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
NOTE 4: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.							
NOTE 5: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.							
NOTE 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.							

A.11.2.2.1.1.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to a known NR intra frequency cell with CCA shall be less than $1350 + \text{MAX}(200, (5+K_1) \times 20)$ ms.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay_CCA}} = T_{\text{UE_re-establish_delay_CCA}} + T_{\text{UL_grant}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$\begin{aligned}
 T_{\text{UE_re-establish_delay_CCA}} &= 50 \text{ ms} + T_{\text{identify_intra_NR_CCA}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR_CCA},i} + T_{\text{SI-NR_CCA}} \\
 &\quad + T_{\text{PRACH_CCA}}
 \end{aligned}$$

Where

$$N_{\text{freq}} = 1$$

$$T_{\text{identify_intra_NR_CCA}} = \text{MAX}(200 \text{ ms}, (5+K_1) \times T_{\text{SMTc}}), \text{ where}$$

K_1 is the number of SMTC occasions not available at the UE due to DL CCA failures during RRC re-establishment period on the carrier with CCA.

$T_{\text{SMTC}} = 20$ ms is the SMTC periodicity.

$T_{\text{identify_inter_NR_CCA}} = 0$ ms

$T_{\text{SI-NR_CCA}} = 1280$ ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

$T_{\text{PRACH_CCA}} = T_{\text{SSB,RO}} + 10$ ms, where:

- $T_{\text{SSB,RO}}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [39], which is $T_{\text{SSB,RO}} = 10$ ms for FR1 PRACH configuration 1 under CCA.

This gives a total of $1350 + \text{MAX}(200, (5+K_1) \times 20)$ ms, allow $1870 + \text{MAX}(200, (5+K_1) \times 20)$ ms from the beginning of T2 in the test case.

A.11.2.2.1.2 Inter-frequency RRC Re-establishment with CCA in FR1

A.11.2.2.1.2.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay with CCA in FR1 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1A.

The test parameters are given in table A.11.2.2.1.2.1-1, table A.11.2.2.1.2.1-2 and table A.11.2.2.1.2.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell with CCA, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.11.2.2.1.2.1-1: Supported test configurations

Configuration	Description
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.2.2.1.2.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Value	Comment
Initial Condition	Active cell	-	Cell1	Cell 1 is with CCA.
	Neighbour cells	-	Cell2	Cell 2 is with CCA.
Final condition	Active cell	-	Cell2	
RF Channel Number		-	1, 2	
DL CCA model	Dynamic channel access Note 1, 3	-	As specified in clause A.3.26.2.1	
	Semi-static channel access Note 2, 3	-		
UL CCA model	Dynamic channel access Note 1, 3	-	As specified in clause A.3.26.2.2	
	Semi-static channel access Note 2, 3	-		
$L_{\text{CCA_DL}}$			5	
$W_{\text{CCA_DL}}$		ms	T311	
$L_{\text{CCA_UL}}$			5	
$W_{\text{CCA_UL}}$		ms	T311	
Time offset between cells		-	3 μ s	Synchronous cells

N310		-	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	Minimum consecutive in-sync indications from lower layers
T310		ms	0	Radio link failure timer; T310 is disabled
T311		ms	3000	RRC re-establishment timer
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
SSB configuration	Dynamic channel access ^{Note 1, 3}	-	SSB.2 CCA	Table A.3.10A.1.2-1
	Semi-static channel access ^{Note 2, 3}	-	SSB.1 CCA	Table A.3.10A.1.1-1
DBT window configuration		-	DBT.1	Table A.3.28.1-1
SMTC configuration		-	SMTC pattern 1	
DRX cycle length		s	OFF	
PRACH configuration		-	FR1 PRACH configuration 1 under CCA	
T1		s	5	
T2		ms	520	Time for the UE to detect RLF (Summation of T _{Evaluate_out_SSB} defined in clause 8.1A in TS 38.133, T310 and the period for UE turns off transmitter)
T3		s	2	
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.2.2.1.2.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
TDD configuration		TDDConf.1.1 CCA			TDDConf.1.1 CCA		
DL CCA probability P_{CCA_DL} for dynamic channel access Note 4,6	-	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$			$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		
DL CCA probability P_{CCA_DL} for semi-static channel access Note 5,6	-	$P_{CCA_DL}=0.9375$			$P_{CCA_DL}=0.9375$		
UL CCA probability P_{CCA_UL}	-	1			1		
PDSCH RMC configuration		SR.1.1 CCA			SR.1.1 CCA		
RMSI CORESET RMC configuration		CR.1.1 CCA			CR.1.1 CCA		
Dedicated CORESET RMC configuration		CCR.1.1 CCA			CCR.1.1 CCA		
OCNG Pattern		OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		TRS.1.2 TDD			N/A		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		

Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
Active DL BWP configuration		DLBWP.1.1	N/A	N/A	N/A	N/A	DLBW P.1.1
Active UL BWP configuration		ULBWP.1.1	N/A	N/A	N/A	N/A	ULBW P.1.1
RLM-RS		SSB			SSB		
$\hat{E}_s/I_{\text{ot}}$	dB	7	-infinity	-infinity	-infinity	-infinity	4
N_{oc} ^{Note2}	dBm/SCS	-95					
N_{oc} ^{Note2}	dBm/15 kHz	-98					
$\hat{E}_s/N_{\text{oc}}$	dB	7	-infinity	-infinity	-infinity	-infinity	4
SS-RSRP ^{Note3}	dBm/SCS	-88	-infinity	-infinity	-infinity	-infinity	-91
Io	dBm/9.36 MHz	-56.15	-63.94	-63.94	-63.94	-63.94	-58.50
Propagation Condition		AWGN					
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.							
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
NOTE 4: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.							
NOTE 5: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.							
NOTE 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.							

A.11.2.2.1.2.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than $T_{\text{re-establish_delay_CCA}}$.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay_CCA}} = T_{\text{UE_re-establish_delay_CCA}} + T_{\text{UL_grant}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$\begin{aligned}
 T_{\text{UE_re-establish_delay_CCA}} &= 50 \text{ ms} + T_{\text{identify_intra_NR_CCA}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR_CCA},i} + T_{\text{SI-NR_CCA}} \\
 &+ T_{\text{PRACH_CCA}}
 \end{aligned}$$

Where

$T_{\text{identify_intra_NR_CCA}}$: 0 ms

$T_{\text{identify_inter_NR_CCA},i}$: MAX (200 ms, $([6]+K_{2,i}) \times T_{\text{SMTC}}, i$),

where

$K_{2,i}$ is the number of SMTC not available at the UE during RRC re-establishment period on the “i” th carrier with CCA

$T_{\text{SMTC},i}$: It is the periodicity of the SMTC occasion configured for the inter-frequency carrier i .

$N_{\text{freq}} = 2$

$T_{\text{SI-NR_CCA}} = 1280$ ms; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

$T_{\text{PRACH_CCA}} = (1 + K_3) \times T_{\text{SSB,RO}} + 10$ ms, where:

- $T_{\text{SSB,RO}}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [3].
- K_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $K_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33].

This gives a total of $T_{\text{re-establish_delay_CCA}} = 50 + \text{MAX}(200 \text{ ms}, (6+K_{2,1}) \times T_{\text{SMTC}}, 1) + 1280 + (1 + K_3) \times T_{\text{SSB,RO}} + 10$ ms, allow $1860 + \text{MAX}(200 \text{ ms}, (6+K_{2,1}) \times T_{\text{SMTC}}, 1) + (1 + K_3) \times T_{\text{SSB,RO}}$ ms from the beginning of T2 in the test case.

A.11.2.2.1.3 Intra-frequency RRC Re-establishment with CCA in FR1 without serving cell timing

A.11.2.2.1.3.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay with CCA in FR1 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1A.

The test parameters are given in table A.11.2.2.1.3.1-1, table A.11.2.2.1.3.1-2 and table A.11.2.2.1.3.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell with CCA, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.11.2.2.1.3.1-1: Supported test configurations

Configuration	Description
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.2.2.1.3.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Value	Comment
Initial Condition	Active cell	-	Cell1
	Neighbour cells	-	Cell2
Final condition	Active cell	-	Cell2
RF Channel Number	-	1	
DL CCA model	Dynamic channel access ^{Note 1,3}	-	As specified in clause A.3.26.2.1

	Semi-static channel access Note 2,3	-		
UL CCA model	Dynamic channel access Note 1,3	-	As specified in clause A.3.26.2.2	
	Semi-static channel access Note 2,3	-		
LCCA_DL			5	
WCCA_DL		ms	T311	
LCCA_UL			5	
WCCA_UL		ms	T311	
Time offset between cells		-	3 μ s	Synchronous cells
N310		-	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	Minimum consecutive in-sync indications from lower layers
T310		ms	0	Radio link failure timer; T310 is disabled
T311		ms	3000	RRC re-establishment timer
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
SSB configuration	Dynamic channel access Note 1, 3	-	SSB.2 CCA	Table A.3.10A.1.2-1
	Semi-static channel access Note 2, 3	-	SSB.1 CCA	Table A.3.10A.1.1-1
DBT window configuration		-	DBT.1	Table A.3.28.1-1
SMTC configuration		-	SMTC pattern 1	
DRX cycle length		s	OFF	
PRACH configuration		-	FR1 PRACH configuration 1	Table A.3.8A.2.1-1
T1		s	5	
T2		ms	520	Time for the UE to detect RLF (Summation of T _{Evaluate_out_SSB} defined in clause 8.1A in TS 38.133, T310 and the period for UE turns off transmitter)
T3		s	$\geq T_{UE_re-establish_delay_CCA}$	As defined in clause 6.2.1A
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.2.2.1.3.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
TDD configuration		TDDConf.1.1 CCA			TDDConf.1.1 CCA		
DL CCA probability P _{CCA_DL} for dynamic channel access Note 4,6	-	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75			P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75		
DL CCA probability P _{CCA_DL} for semi-static channel access Note 5,6	-	P _{CCA_DL} =0.9375			P _{CCA_DL} =0.9375		

UL CCA probability P_{CCA_UL}	-	1			1		
PDSCH RMC configuration		SR.1.1 CCA			SR.1.1 CCA		
RMSI CORESET RMC configuration		CR.1.1 CCA			CR.1.1 CCA		
Dedicated CORESET RMC configuration		CCR.1.1 CCA			CCR.1.1 CCA		
OCNG Pattern		OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		TRS.1.2 TDD			N/A		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
Active DL BWP configuration		DLBWP.1.1	N/A	N/A	N/A	N/A	DLBW P.1.1
Active UL BWP configuration		ULBWP.1.1	N/A	N/A	N/A	N/A	ULBW P.1.1
RLM-RS		SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	4	-infinity	-infinity	-infinity	-infinity	4
N_{oc} Note2	dBm/SCS	-95					
N_{oc} Note2	dBm/15 kHz	-98					
$\hat{E}_s/N_{oc}$	dB	4	-infinity	-infinity	-infinity	-infinity	4
SS-RSRP Note3	dBm/SCS	-91	-infinity	-infinity	-infinity	-infinity	-91
I_o	dBm/38.16 MHz	-58.50	-63.94	-63.94	-63.94	-63.94	-58.50
Propagation Condition		AWGN					
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.							
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
NOTE 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
NOTE 4: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.							
NOTE 5: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.							
NOTE 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.							

A.11.2.2.1.3.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 1350 + MAX (800 ms, (10+ K₁) x 20) ms.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re-establish_delay_CCA} = T_{UE_re-establish_delay_CCA} + T_{UL_grant}$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay_CCA} = 50 \text{ ms} + T_{identify_intra_NR_CCA} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR_CCA,i} + T_{SI-NR_CCA} + T_{PRACH_CCA}$$

Where,

$$N_{freq} = 1$$

$$T_{identify_intra_NR} = \text{MAX} (800 \text{ ms}, (10 + K_1) \times T_{SMTC}), \text{ where}$$

K_1 is the number of SMTC occasions not available at the UE due to DL CCA failures during RRC re-establishment period on the carrier with CCA.

T_{SMTC} is the SMTC periodicity which is 20ms.

$$T_{identify_inter_NR_CCA} = 0 \text{ ms}$$

$T_{SI-NR_CCA} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 [2] for the target intra-frequency NR cell.

$$T_{PRACH_CCA} = (1 + K_3) \times T_{SSB,RO} + 10 \text{ ms}, \text{ where:}$$

- $T_{SSB,RO}$ is the SSB to PRACH occasion association period as defined in Table 8.1-1 of TS 38.213 [39]. It is 10 ms for FR1 PRACH configuration 1 under CCA.
- $K_3 = 0$.

This gives total $T_{UE_re-establish_delay_CCA} = 1350 + \text{MAX} (800 \text{ ms}, (10 + K_1) \times 20) \text{ ms}$, allow $1870 + \text{MAX} (800 \text{ ms}, (10 + K_1) \times 20) \text{ ms}$ from the beginning of T2 in the test case.

A.11.2.2.1.4 Inter-frequency RRC Re-establishment from NR FR1 carrier without CCA to NR FR1 carrier under CCA

A.11.2.2.1.4.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay requirement for RRC re-establishment from NR FR1 carrier without CCA to NR FR1 inter-frequency carrier under CCA with unknown target cell. These tests will verify the requirements in clause 6.2.1A.

The test parameters are given in table A.11.2.2.1.4.1-1, table A.11.2.2.1.4.1-2 and table A.11.2.2.1.4.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.11.2.2.1.4.1-1: Supported test configurations inter-frequency RRC re-establishment from NR FR1 without under CCA to NR FR1 inter-frequency carrier under CCA

Configuration	Source cell without CCA	Target cell with CCA
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD

Note: The UE is only required to be tested in one of the supported test configurations

Table A.11.2.2.1.4.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case from NR FR1 carrier without CCA to NR FR1 inter-frequency carrier under CCA

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cells		Cell2	
Final condition	Active cell		Cell2	
RF Channel Number			1, 2	
Time offset between cells			3 μ s	Synchronous cells
DL CCA model	Dynamic channel access ^{Note 1,3}	-	As specified in clause A.3.26.2.1	
	Semi-static channel access ^{Note 2,3}	-		
UL CCA model	Dynamic channel access ^{Note 1,3}	-	As specified in clause A.3.26.2.2	
	Semi-static channel access ^{Note 2,3}	-		
L_{CCA_DL}			5	
W_{CCA_DL}		ms	T311	
L_{CCA_UL}			5	
W_{CCA_UL}		ms	T311	
N310		-	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	Minimum consecutive in-sync indications from lower layers
T310		ms	0	Radio link failure timer; T310 is disabled
T311		ms	5000	RRC re-establishment timer
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	OFF	
PRACH configuration			FR1 PRACH configuration 1	Table A.3.8A.2.1-1
T1		s	5	
T2		ms	520	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1A in TS 38.133, T310 and the period for UE turns off transmitter)
T3		s	$\geq T_{UE_re-establish_delay_CCA}$	As defined in clause 6.2.1A
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.2.2.1.4.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case from NR FR1 carrier without CCA to NR FR1 inter-frequency carrier under CCA

Parameter	Test config	Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration	1		N/A			TDDConf.1.1.CCA		
	2		TDDConf.1.1			TDDConf.1.1.CCA		
	3		TDDConf.2.1			TDDConf.1.1.CCA		
PDSCH RMC configuration	1		SR.1.1 FDD			SR.1.1 CCA		

		2		SR.1.1 TDD			SR.1.1 CCA		
		3		SR.2.1 TDD			SR.1.1 CCA		
RMSI CORESET RMC configuration		1		CR.1.1 FDD			CR.1.1 CCA		
		2		CR.1.1 TDD			CR.1.1 CCA		
		3		CR.2.1 TDD			CR.1.1 CCA		
Dedicated CORESET RMC configuration		1		CCR.1.1 FDD			CCR.1.1 CCA		
		2		CCR.1.1 TDD			CCR.1.1 CCA		
		3		CCR.2.1 TDD			CCR.1.1 CCA		
OCNG Pattern		1		OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1		TRS.1.1 FDD			TRS.1.2 TDD		
		2		TRS.1.1 TDD			TRS.1.2 TDD		
		3		TRS.1.2 TDD			TRS.1.2 TDD		
SMTC configuration		1,2,3		SMTC.1			SMTC.1		
SSB configuration	Semi- static channel acces	1,2		SSB.1 FR1			SSB.1 CCA		
	Semi- static channel acces	3		SSB.2 FR1			SSB.1 CCA		
	Dymamic channel acces	1,2		SSB.1 FR1			SSB.2 CCA		
	Dymamic channel acces	3		SSB.2 FR1			SSB.2 CCA		
Initial DL BWP configuration		1,2,3		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1,2,3		ULBWP.0.1			ULBWP.0.1		
Active DL BWP confiuration		1,2,3		DLBWP.1.1	N/A	N/A	N/A	N/A	DLBW P.1.1
Active UL BWP configuration		1,2,3		ULBWP.1.1	N/A	N/A	N/A	N/A	ULBW P.1.1
DL CCA probability for semi-static channel access (P _{CCA_DL})		1,2,3		N/A	N/A	N/A	1	1	0.9375
DL CCA probability for for dynamic static channel access (P _{CCA_DL_1})		1,2,3		N/A	N/A	N/A	1	1	0.75
DL CCA probability for for dynamic static channel access (P _{CCA_DL_2})		1,2,3		N/A	N/A	N/A	1	1	0.75
UL CCA probability (P _{CCA_UL})		1,2,3		N/A	N/A	N/A	1	1	1
RLM-RS		1,2,3		SSB			SSB		
$\hat{E}_s/I_{ot}$		1,2,3	dB	4	-infinity	-infinity	-infinity	-infinity	7
N_{OC} Note2		1,2,3	dBm/15 KHz	-98					
N_{OC} Note2		1,2	dBm/SCS	-98					
		3		-95					
$\hat{E}_s/N_{oc}$		1,2,3	dB	4	-infinity	-infinity	-infinity	-infinity	7
SS-RSRP Note3		1, 2	dBm/SCS	-94	-infinity	-infinity	-infinity	-infinity	-91
		3		-91	-infinity	-infinity	-infinity	-infinity	-88
Io		1,2	dBm/9.36 MHz	-64.59	-70. 05	-70. 05	-63.94	-63.94	-56.15
		3	dBm/38.16 MHz	-58.50	-63.94	-63.94	-63.94	-63.94	-56.15
Propagation Condition		1,2,3		AWGN					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.									
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{OC} to be fulfilled.									
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.									
Note 4: Parameters P _{CCA_DL} , P _{CCA_DL_1} , P _{CCA_DL_2} and P _{CCA_UL} are defined in clause A.3.26.2.									
Note 5: For UE supporting both semi-static and dynamic cannal access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.									

A.11.2.2.1.4.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less $T_{UE_re-establish_delay_CCA}$.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{re-establish_delay_CCA} = T_{UE_re-establish_delay_CCA} + T_{UL_grant}$$

Where:

T_{UL_grant} = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence T_{UL_grant} is not used.

$$T_{UE_re-establish_delay_CCA} = 50 \text{ ms} + T_{identify_intra_NR_CCA} + \sum_{i=1}^{N_{freq}-1} T_{identify_inter_NR_CCA,i} + T_{SI-NR_CCA} + T_{PRACH_CCA}$$

$$N_{freq} = 2$$

$$T_{identify_intra_NR_CCA} = \text{MAX} (800 \text{ ms}, (10 + K_1) \times 20) \text{ ms}$$

$$T_{identify_inter_NR_CCA} = \text{MAX} (800 \text{ ms}, (13 + K_{2,2}) \times 20) \text{ ms}$$

$T_{SI-NR_CCA} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

T_{PRACH_CCA} = It is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell. $T_{PRACH_CCA} = (1 + K_3) \times T_{SSB,RO} + 10 \text{ ms}$; where $K_3=0$ and $T_{SSB,RO}=10 \text{ ms}$ for FR1 PRACH configuration 1 under CCA.

K_1 is the number of SMTC occasions not available at the UE due during RRC re-establishment period on the carrier with CCA and with RF channel number # 1.

$K_{2,2}$ is the number of SMTC occasions not available at the UE during RRC re-establishment period on the carrier with CCA and with RF channel number # 2.

This gives total $T_{UE_re-establish_delay_CCA} = 1350 + \text{MAX} (800 \text{ ms}, (10 + K_1) \times 20) \text{ ms} + \text{MAX} (800 \text{ ms}, ((13) + K_{2,2}) \times 20) \text{ ms}$, allow 1870 + $\text{MAX} (800 \text{ ms}, (10 + K_1) \times 20) \text{ ms} + \text{MAX} (800 \text{ ms}, ((13) + K_{2,2}) \times 20) \text{ ms}$ from the beginning of T2 in the test case.

A.11.2.2.2 Random Access

A.11.2.2.2.1 4-step RA type contention-based random access for NR PCell with CCA

A.11.2.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in Clause 6.2.2A.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1, which operates on a carrier frequency with CCA. Supported test parameters are shown in Table A.11.2.2.2.1.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.11.2.2.2.1.1-2.

Table A.11.2.2.1.1-1: Supported test configurations for contention based random access test for FR1 PCell with CCA

Config	Description
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	Void

Table A.11.2.2.1.1-2: General test parameters for contention based random access test for FR1 PCell with CCA

Parameter			Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1		SSB.3 CCA	As defined in A.3.10A
	Note 5, 6	Config 1		SSB.4 CCA	As defined in A.3.10A
DBT Window Configuration		Config 1		DBT.1	As specified in A.3.28.1
DL CCA model		Config 1		As specified in A.3.26.2.1	
UL CCA model		Config 1		As specified in A.3.26.2.2	
Duplex Mode for Cell 2		Config 1		TDD	
TDD Configuration		Config 1		TDDConf.1.1 CCA	
OCNG Pattern ^{Note 1}				OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters ^{Note 3}		Config 1		SR.1.1 CCA	As defined in A.3.1A.1.
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
I_0 ^{Note 2}		Config 1	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power (P _{CMAX,f,c})			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 1 under CCA	As defined in A.3.8A.2.
DL CCA probability P _{CCA DL}	Note 4, 6			0.9375	
	Note 5, 6			0.75 / 0.75	

L_{CCA_DL} Note 7		4	
W_{CCA_DL} Note 8		Inf	
UL CCA probability	Note 4, 6	0.87	
P_{CCA_UL}	Note 5, 6	0.75	
L_{CCA_UL} Note 7		5	
W_{CCA_UL} Note 8		Inf	
Semi-static channel access config period Note 4, 6	ms	2	
Propagation Condition	-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters. Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required. Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}. Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration. Note 7: L_{CCA_DL} and L_{CCA_UL} are chosen such that $preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}$. Note 8: A window $W_{CCA_DL}=W_{CCA_UL}=Inf$ is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.			

A.11.2.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.11.2.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2A.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*, if the UL CCA is successful.

The three requirements below are relevant for all cases of PRACH transmissions described within the whole clause A.11.2.2.2.1.2:

- The System Simulator shall implement the UL CCA model of A.3.26.2 for the RACH occasions where PRACH transmissions are expected. The System Simulator shall monitor the RACH occasions to detect if the UE is transmitting PRACH preambles. If a PRACH transmission is detected on a RACH occasion that is expected to have UL CCA failure, the test is considered as failed.
- In case of CCA DL failure, the test equipment should verify that the UE does not transmit PRACH for semi-static channel access mode; for dynamic channel access mode it is assumed that RACH occasions are always scheduled within a UE-initiated COT.
- In case of UL CCA failure, The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2A.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble. In case of CCA DL failure, the test equipment should delay the transmission of Random Access Response.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 transmission is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2A.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles. In case of CCA DL failure, the test equipment should delay the transmission of Random Access Response.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2A.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.11.2.2.2.1.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2A.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A.11.2.2.2.1.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2A.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.11.2.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2A.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.11.2.2.2.2 4-step RA type non-contention based random access for NR PSCell with CCA

A.11.2.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in Clause 6.2.2A.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1, which operates on a carrier frequency with CCA. Supported test parameters are shown in Table A.11.2.2.2.2.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.11.2.2.2.2.1-2.

Table A.11.2.2.2.2.1-1: Supported test configurations for non-contention based random access test for FR1 PCell with CCA

Config	Description
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: Void	

Table A.11.2.2.2.2.1-2: General test parameters for non-contention based random access test for FR1 PCell with CCA

Parameter			Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1		SSB.3 CCA	As defined in A.3.10A
	Note 5, 6	Config 1		SSB.4 CCA	As defined in A.3.10A
DBT Window Configuration		Config 1		DBT.1	As specified in A.3.28.1
DL CCA model		Config 1		As specified in A.3.26.2.1	
UL CCA model		Config 1		As specified in A.3.26.2.2	
Duplex Mode for Cell 2		Config 1		TDD	

TDD Configuration	Config 1		TDDConf.1.1 CCA	
OCNG Pattern ^{Note 1}			OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters ^{Note 3}	Config 1		SR.1.1 CCA	As defined in A.3.1A.1.
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
SSB with index 0	$\hat{E}_s / I_{ot}$	dB	3	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i>
	N_{oc} Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$	dB	3	
	SS-RSRP	dBm/SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$	dB	-17	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	N_{oc} Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$	dB	-17	
	SS-RSRP	dBm/SCS	-115	
I_0 ^{Note 2}	Config 1	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower		dBm/SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX, f, c}$)		dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration			FR1 PRACH configuration 2 under CCA	As defined in A.3.8A.2.
DL CCA probability P_{CCA_DL}	Note 4, 6		0.9375	
	Note 5, 6		0.75 / 0.75	
L_{CCA_DL} ^{Note 7}			4	
W_{CCA_DL} ^{Note 8}			Inf	
UL CCA probability P_{CCA_UL}	Note 4, 6		0.87	
	Note 5, 6		0.75	
L_{CCA_UL} ^{Note 7}			5	
W_{CCA_UL} ^{Note 8}			Inf	
Semi-static channel access config period ^{Note 4, 6}		ms	2	
Propagation Condition		-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: SS-RSRP, E_s/I_{ot} and I_0 levels have been derived from other parameters for information purpose. They are not settable parameters. Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.				

Note 4:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2} .
Note 6:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.
Note 7:	L_{CCA_DL} and L_{CCA_UL} are chosen such that $preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}$.
Note 8:	A window $W_{CCA_DL}=W_{CCA_UL}=Inf$ is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

A.11.2.2.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.11.2.2.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2A.2.2.1 for SSB-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

The three requirements below are relevant for all cases of PRACH transmissions described within the clause A.11.2.2.2.2:

- The System Simulator shall implement the UL CCA model of A.3.26.2 for the RACH occasions where PRACH transmissions are expected. The System Simulator shall monitor the RACH occasions to detect if the UE is transmitting PRACH preambles. If a PRACH transmission is detected on a RACH occasion that is expected to have UL CCA failure, the test is considered as failed.
- In case of CCA DL failure, the test equipment should verify that the UE does not transmit PRACH for semi-static channel access mode; for dynamic channel access mode it is assumed that RACH occasions are always scheduled within a UE-initiated COT.
- In case of UL CCA failure The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS38.321 [7], and transmit with the calculated PRACH transmission power.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2A.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble. In case of CCA DL failure, the test equipment should delay the transmission of Random Access Response.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2A.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles. In case of CCA DL failure, the test equipment should delay the transmission of Random Access Response.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.2. The power of the first preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.3 2-step RA type contention-based random access for NR PCell with CCA

A.11.2.2.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the 2-step RA type random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in Clause 6.2.2A.3 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1, which operates on a carrier frequency with CCA. Supported test parameters are shown in Table A.11.2.2.2.3.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.11.2.2.2.3.1-2.

Table A.11.2.2.2.3.1-1: Supported test configurations for 2-step RA type contention based random access with successRAR test for FR1 PCell with CCA

Config	Description
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	Void

Table A.11.2.2.3.1-2: General test parameters for 2-step RA type contention based random access with successRAR test for FR1 PCell with CCA

Parameter			Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1		SSB.3 CCA	As defined in A.3.10A
	Note 5, 6	Config 1		SSB.4 CCA	As defined in A.3.10A
DBT Window Configuration		Config 1		DBT.1	As specified in A.3.28.1
DL CCA model		Config 1		As specified in A.3.26.2.1	
UL CCA model		Config 1		As specified in A.3.26.2.2	
Duplex Mode for Cell 2		Config 1		TDD	
TDD Configuration		Config 2		TDDConf.1.1 CCA	
OCNG Pattern ^{Note 1}				OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters ^{Note 3}		Config 1		SR.1.1 CCA	As defined in A.3.1A.1.
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured <i>msgA-RSRP-ThresholdSSB</i>
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured <i>msgA-RSRP-ThresholdSSB</i>
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
I_0 ^{Note 2}		Config 1	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX,f,c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 1 under CCA	As defined in A.3.20A.2.
<i>msgA-RSRP-ThresholdSSB</i>			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
DL CCA probability P_{CCA_DL}	Note 4, 6			0.9375	
	Note 5, 6			0.75 / 0.75	
L_{CCA_DL} ^{Note 7}				4	
W_{CCA_DL} ^{Note 8}				Inf	
UL CCA probability P_{CCA_UL}	Note 4, 6			0.87	
	Note 5, 6			0.75	
L_{CCA_UL} ^{Note 7}				5	
W_{CCA_UL} ^{Note 8}				Inf	
Semi-static channel access config period ^{Note 4, 6}			ms	2	
Propagation Condition			-	AWGN	

Note 1:	OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2:	SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3:	The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 4:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 5:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2} .
Note 6:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration.
Note 7:	L_{CCA_DL} and L_{CCA_UL} are chosen such that $preambleTransMax > 5 + L_{CCA_DL} + L_{CCA_UL}$.
Note 8:	A window $W_{CCA_DL}=W_{CCA_UL}=Inf$ is used to indicate that L_{CCA_DL} and L_{CCA_UL} are considered during the entire duration of a test run.

A.11.2.2.3.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.11.2.2.3.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2A.3.1.1 the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB*, if the UL CCA is successful.

The three requirements below are relevant for all cases of MsgA transmissions described within the clause A.11.2.2.3.2:

- The System Simulator shall implement the UL CCA model for the MsgA occasions (i.e. both MsgA PRACH and MsgA PUSCH occasions) where MsgA transmissions are expected. The System Simulator shall monitor the MsgA occasions to detect if the UE is transmitting MsgA. If a MsgA transmission is detected on MsgA occasions that are expected to have UL CCA failure, the test is considered as failed.
- In case of CCA DL failure, the test equipment should verify that the UE does not transmit MsgA for semi-static channel access mode; for dynamic channel access mode it is assumed that MsgA occasions are always scheduled within a UE-initiated COT.
- The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated PRACH transmission power in case of UL CCA failure.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2A.3. The power of the first MsgA preamble transmission shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.3.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2A.3.1.2 the System Simulator shall transmit a MsgB containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble. In case of CCA DL failure, the test equipment should delay the transmission of MsgB.

The UE may stop monitoring for MsgB(s) and shall transmit an ACK if the MsgB with a successRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble and if the Contention Resolution is successful and if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting ACK in the case of CCA UL failure. If ACK transmission is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 is detected on a grant expected to have UL CCA failure, the test is considered as failed.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB(s) contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2A.3. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.3.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2A.3.1.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles. In case of CCA DL failure, the test equipment should delay the transmission of MsgB.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2A.3. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.2.4 2-step RA type non-contention-based random access for NR PCell with CCA

A.11.2.2.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits when subject to CCA. This test will verify the requirements in Clause 6.2.2A.3 and Clause 7.1.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1, which operates on a carrier frequency with CCA. Supported test parameters are shown in Table A.11.2.2.4.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.11.2.2.4.1-2.

Table A.11.2.2.4.1-1: Supported test configurations for non-contention based random access test for FR1 PCell with CCA

Config	Description
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	Void

Table A.11.2.2.4.1-2: General test parameters for non-contention based random access test for FR1 PCell with CCA

Parameter			Unit	Test-1	Comments
SSB Configuration	Note 4, 6	Config 1		SSB.3 CCA	As defined in A.3.10A
	Note 5, 6	Config 1		SSB.4 CCA	As defined in A.3.10A
DBT Window Configuration		Config 1		DBT.1	As specified in A.3.28.1
DL CCA model		Config 1		As specified in A.3.26.2.1	
UL CCA model		Config 1		As specified in A.3.26.2.2	
Duplex Mode for Cell 1		Config 1		TDD	
TDD Configuration		Config 1		TDDConf.1.1 CCA	
OCNG Pattern ^{Note 1}				OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters ^{Note 3}		Config 1		SR.1.1 CCA	As defined in A.3.1A.1.
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
msgA-RSRP-ThresholdSSB			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured msgA-RSRP-ThresholdSSB
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured msgA-RSRP-ThresholdSSB
	N_{oc}	Config 1	dBm/15kHz	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
I_0 ^{Note 2}		Config 1	dBm	-62.2/38.16MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].

Configured UE transmitted power ($P_{\text{CMAX}, f, c}$)		dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration			FR1 MsgA configuration 2 under CCA	As defined in A.3.20A.2.
DL CCA probability	Note 4, 6		0.9375	
$P_{\text{CCA_DL}}$	Note 5, 6		0.75 / 0.75	
$L_{\text{CCA_DL}}$ Note 7			4	
$W_{\text{CCA_DL}}$ Note 8			Inf	
UL CCA probability	Note 4, 6		0.87	
$P_{\text{CCA_UL}}$	Note 5, 6		0.75	
$L_{\text{CCA_UL}}$ Note 7			5	
$W_{\text{CCA_UL}}$ Note 8			Inf	
Semi-static channel access config period Note 4, 6		ms	2	
Propagation Condition		-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: SS-RSRP, Es/lot and Io levels have been derived from other parameters for information purpose. They are not settable parameters. Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required. Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds $P_{\text{CCA_DL1}}$ and the second value corresponds to the $P_{\text{CCA_DL2}}$. Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic channel occupancy and semi-static channel occupancy configuration. Note 7: $L_{\text{CCA_DL}}$ and $L_{\text{CCA_UL}}$ are chosen such that $\text{preambleTransMax} > 5 + L_{\text{CCA_DL}} + L_{\text{CCA_UL}}$. Note 8: A window $W_{\text{CCA_DL}}=W_{\text{CCA_UL}}=\text{Inf}$ is used to indicate that $L_{\text{CCA_DL}}$ and $L_{\text{CCA_UL}}$ are considered during the entire duration of a test run.				

A.11.2.2.4.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.11.2.2.4.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2A.3.2.1, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA PRACH on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

The three requirements below are relevant for all cases of MsgA transmissions described within the clause A.11.2.2.4.2:

- The System Simulator shall implement the UL CCA model for the MsgA occasions (i.e. both MsgA PRACH and MsgA PUSCH occasions) where MsgA transmissions are expected. The System Simulator shall monitor

the MsgA occasions to detect if the UE is transmitting MsgA. If a MsgA transmission is detected on MsgA occasions that are expected to have UL CCA failure, the test is considered as failed.

- In case of CCA DL failure, the test equipment should verify that the UE does not transmit MsgA for semi-static channel access mode; for dynamic channel access mode it is assumed that MsgA occasions are always scheduled within a UE-initiated COT.
- The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated PRACH transmission power in case of UL CCA failure.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.3. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.4.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2A.3.2.2 the System Simulator shall transmit a MsgB containing a fallbackRAR containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble. In case of CCA DL failure, the test equipment should delay the transmission of MsgB.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 containing the payload of MsgA PUSCH if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble if UL CCA is successful. The System Simulator shall monitor if the UE is transmitting msg3 when CCA UL failure. If a msg3 is detected on a grant expected to have UL CCA failure, the test is considered as failed. The UE shall monitor contention resolution as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

The system simulator shall implement the UL CCA model of A.3.26.2 for the MsgA occasions where MsgA System Simulator transmissions are expected. The System Simulator shall monitor the MsgA occasions to detect if the UE is transmitting MsgA. If a MsgA transmission is detected on a MsgA occasion that is expected to have UL CCA failure, the test is considered as failed.

In case of CCA DL failure, the test equipment should verify that the UE does not transmit MsgA for semi-static channel access mode.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS38.321 [7], and transmit with the calculated MsgA transmission power in case UL CCA failure.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2A.3. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA and msg3 transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.4.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2A.3.2.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles. In case of CCA DL failure, the test equipment should delay the transmission of MsgB.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

The System Simulator shall implement the UL CCA model of A.3.26.2 for the MsgA occasions where MsgA transmissions are expected. The System Simulator shall monitor the MsgA occasions to detect if the UE is transmitting MsgA. If a MsgA transmission is detected on a MsgA occasion that is expected to have UL CCA failure, the test is considered as failed.

In case of CCA DL failure, the test equipment should verify that the UE does not transmit MsgA for semi-static channel access mode.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power in case UL CCA failure.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2A.3. The power of the first MsgA preamble shall be -16 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be $0.6 + 3(\mu + 2)$ dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18], where μ indicates the MsgA PUSCH numerology. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1.2.

A.11.2.2.3 RRC connection release with redirection

A.11.2.2.3.1 Redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA

A.11.2.2.3.1.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR FR1 carrier under CCA to NR FR1 carrier under CCA specified in clause 6.2.3.2.3.

A.11.2.2.3.1.2 Test Parameters

Supported test configurations are shown in table A.11.2.2.3.1.2-1. The time delay is tested by using the parameters in table A.11.2.2.3.1.2-2, and A.11.2.2.3.1.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.11.2.2.3.1.2-1: Redirection from NR to NR test configurations

Config	Description
1	Source cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.2.2.3.1.2-2: General test parameters for Redirection from NR to NR test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	On the carrier under CCA
	Neighbouring cell		Cell 2	On the carrier under CCA
Final condition	Active cell		Cell 2	On the carrier under CCA
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μ s	Synchronous cells
DL CCA model	Dynamic channel access ^{Note 1, 3}		As specified in clause A.3.26.2.1	
	Semi-static channel access ^{Note 2, 3}			
UL CCA model	Dynamic channel access ^{Note 1, 3}		As specified in clause A.3.26.2.2	
	Semi-static channel access ^{Note 2, 3}			
T1		s	5	
T2		s	$\geq T_{\text{connection_release_redirect_NR_CCA}}$	$T_{\text{connection_release_redirect_NR_CCA}}$ is defined in clause 6.2.3.2.3
NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.2.2.3.1.2-3: Cell specific test parameters for Redirection from NR to NR test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
P _{CCA_DL} for dynamic channel access ^{Note 4,6}		-	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75		P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75	
P _{CCA_DL} for semi-static channel access ^{Note 5,6}		-	P _{CCA_DL} =0.9375		P _{CCA_DL} =0.9375	
P _{CCA_UL} for dynamic channel access ^{Note 4,6}		-	1		1	
P _{CCA_UL} for semi-static channel access ^{Note 5,6}		-	1		1	
L _{CCA_DL} ^{Note 7}			N/A		8	
W _{CCA_DL} ^{Note 7}		ms	N/A		T _{identify-NR_CCA}	
TDD configuration	Config 1		TDDConf.1.1 CCA			
BW _{channel}	Config 1		40: N _{RB,c} = 106			
BWP BW	Config 1		40: N _{RB,c} = 106			
DRX Cycle		ms	Not Applicable			
PDSCH Reference	Config 1		SR.1.1 CCA			
RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA			
Dedicated CORESET RMC configuration	Config 1		CCR.1.1 CCA			
TRS configuration	Config 1		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC Configuration			SMTC.1			
DBT configuration			DBT.1			
SSB configuration for semi-static channel access ^{Note 4, 6}	Config 1		SSB.1 CCA			
SSB configuration for dynamic channel access ^{Note 5, 6}	Config 1		SSB.2 CCA			
ssb-PositionOCL	Config 1		[1]			

PDSCH/PDCCH subcarrier spacing		Config 1	kHz	30 kHz			
PUCCH/PUSCH subcarrier spacing		Config 1	kHz	30 kHz			
PRACH configuration				FR1 PRACH configuration 1 under CCA			
BWP configuration	Initial DL BWP			DLBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1			
	Initial UL BWP			ULBWP.0.1			
	Dedicated UL BWP			ULBWP.1.1			
EPRE ratio of PSS to SSS			dB	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}			dBm/15kHz z	-98			
N_{oc}^{Note2}	Config 1		dBm/SCS	-95			
$\hat{E}_s/I_{ot}$			dB	4	4	-infinity	4
$\hat{E}_s/N_{oc}$			dB	4	4	-infinity	4
I_o^{Note3}	Config 1		dBm/ 38.16MHz	-58.49	-58.49	-63.94	-58.49
Propagation condition			-	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.							
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.							
Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.							
Note 7: As defined in clause 6.2.3.2.3 for $T_{rs} \leq 40$ ms.							

A.11.2.2.3.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than $T_{\text{connection_release_redirect_NR_CCA}}$ ms from the beginning of time period T2, where $T_{\text{connection_release_redirect_NR_CCA}}$ is defined in clause 6.2.3.2.3.

The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{\text{connection_release_redirect_NR_CCA}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-NR_CCA}} + T_{\text{SI-NR_CCA}} + T_{\text{RACH_CCA}},$$

where:

$T_{\text{RRC_procedure_delay}} = 110$ ms in the test.

$T_{\text{identify-NR_CCA}} = \text{MAX}(680 \text{ ms}, (L_1+11) \times 20 \text{ ms})$ in the test.

$T_{SI-NR} = 1280$ ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

T_{RACH_CCA} is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell.

L_1 is the number of SMTC occasions not available at the UE due to DL CCA failures. The test equipment ensure that number of L_1 in target cell does not exceed $L_{1,max}$ using the configured L_{CCA_DL} as in clause A.3.26.2.1;

A.11.2.2.3.2 Redirection from NR FR1 carrier without CCA to NR FR1 carrier with CCA

A.11.2.2.3.2.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR FR1 carrier without CCA to NR FR1 carrier with CCA specified in clause 6.2.3.2.3.

A.11.2.2.3.2.2 Test Parameters

Supported test configurations are shown in table A.11.2.2.3.2.2-1. The time delay is tested by using the parameters in table A.11.2.2.3.2.2-2, and A.11.2.2.3.2.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.11.2.2.3.2.2-1: Redirection from NR to NR test configurations

Configuration	Source cell without CCA	Target cell with CCA
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
3	30 kHz SSB SCS, 40 MHz bandwidth, TDD	30 kHz SSB SCS, 40 MHz bandwidth, TDD
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.11.2.2.3.2.2-2: General test parameters for Redirection from NR to NR test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	On the carrier without CCA
	Neighbouring cell		Cell 2	On the carrier under CCA
Final condition	Active cell		Cell 2	On the carrier under CCA
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μ s	Synchronous cells
DL CCA model	Dynamic channel access ^{Note 1, 3}		As specified in clause A.3.26.2.1	
	Semi-static channel access ^{Note 2, 3}			
UL CCA model	Dynamic channel access ^{Note 1, 3}		As specified in clause A.3.26.2.2	
	Semi-static channel access ^{Note 2,3}			
T1		S	5	
T2		S	$\geq T_{\text{connection_release_redirect_NR_CCA}}$	$T_{\text{connection_release_redirect_NR_CCA}}$ is defined in clause 6.2.3.2.3

NOTE 1: For a UE supporting dynamic channel access and network configuring dynamic channel occupancy.
 NOTE 2: For a UE supporting semi-static channel access and network configuring semi-static channel occupancy.
 NOTE 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table A.11.2.2.3.2.2-3: Cell specific test parameters for Redirection from NR to NR test case

Parameter			Unit	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number				1		2	
P _{CCA_DL} for dynamic channel access Note 4,6				N/A		P _{CCA_D} _{L_1} =0.75 P _{CCA_D} _{L_2} =0.75	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75
P _{CCA_DL} for semi-static channel access Note 5,6				N/A		P _{CCA_D} _L =0.9375	P _{CCA_DL} =0.9375
P _{CCA_UL} for dynamic channel access Note 4,6				N/A		1	1
P _{CCA_UL} for semi-static channel access Note 5,6				N/A		1	1
L _{CCA_DL} Note 7				N/A		8	
W _{CCA_DL} Note 7			ms	N/A		T _{Identify-NR_CCA}	
Duplex mode		Config 1		FDD		TDD	
		Config 2,3		TDD			
TDD configuration		Config 1		Not Applicable		TDDConf.1.1 CCA	
		Config 2		TDDConf.1.1		TDDConf.1.1 CCA	
		Config 3		TDDConf.2.1		TDDConf.1.1 CCA	
BW _{channel}		Config 1	MHz	10: N _{RB,c} = 52		40: N _{RB,c} = 106	
		Config 2		10: N _{RB,c} = 52		40: N _{RB,c} = 106	
		Config 3		40: N _{RB,c} = 106			
BWP BW		Config 1	MHz	10: N _{RB,c} = 52		40: N _{RB,c} = 106	
		Config 2		10: N _{RB,c} = 52		40: N _{RB,c} = 106	
		Config 3		40: N _{RB,c} = 106			
DRX Cycle			ms	Not Applicable			
PDSCH Reference measurement channel		Config 1		SR.1.1 FDD		SR.1.1 CCA	
		Config 2		SR.1.1 TDD		SR.1.1 CCA	
		Config 3		SR2.1 TDD		SR.1.1 CCA	
RMSI CORESET RMC configuration		Config 1		CR.1.1 FDD		CR.1.1 CCA	
		Config 2		CR.1.1 TDD		CR.1.1 CCA	
		Config 3		CR.2.1 TDD		CR.1.1 CCA	
Dedicated CORESET RMC configuration		Config 1		CCR.1.1 FDD		CCR.1.1 CCA	
		Config 2		CCR.1.1 TDD		CCR.1.1 CCA	
		Config 3		CCR.2.1 TDD		CCR.1.1 CCA	
OCNG Patterns				OCNG pattern 1			
SSB Configuration	Semi-static channel acces	Config 1,2		SSB.1 FR1		SSB.1 CCA	
	Dymamic channel acces	Config 3		SSB.2 FR1		SSB.2 CCA	
	Semi-static channel acces	Config 1,2		SSB.1 FR1		SSB.1 CCA	
	Dymamic channel acces	Config 3		SSB.2 FR1		SSB.2 CCA	
SMTC configuration		Config 1,2		SMTC.1 FR1		SMTC.2 FR1	
		Config 3		SMTC.2 FR1			
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz		30 kHz	
		Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing		Config 1,2	kHz	15 kHz		30 kHz	
		Config 3		30 kHz			
PRACH configuration				FR1 PRACH configuration 1 under CCA in Table A.3.8A.2.1-1			
BWP configuration		Initial DL BWP		DLBWP.0.1			

		Dedicated DL BWP		DLBWP.1.1			
		Initial UL BWP		ULBWP.0.1			
		Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS			dB	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS (Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}		dBm/15kHz	-98				
N_{oc}^{Note2}	Config 1,2	dBm/SCS	-98		-95		
	Config 3		-95				
$\hat{E}_s/I_{ot}$		dB	4	4	-infinity	4	
$\hat{E}_s/N_{oc}$		dB	4	4	-infinity	4	
I_o^{Note3}	Config 1,2	dBm/9.36 MHz	-64.59	-64.59	N/A	N/A	
		dBm/38.16 MHz	NA	NA	-63.94	-58.49	
	Config 3	dBm/38.16 MHz	-58.49	-58.49	-63.94	-58.49	
Propagation condition			-	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.							
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.							
Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.							
Note 7: As defined in clause 6.2.3.2.3 for $T_{rs} \leq 40$ ms.							

A.11.2.2.3.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than $T_{\text{connection_release_redirect_NR_CCA}}$ ms from the beginning of time period T2, where $T_{\text{connection_release_redirect_NR_CCA}}$ is defined in clause 6.2.3.2.3.

The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{\text{connection_release_redirect_NR_CCA}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify_NR_CCA}} + T_{\text{SI_NR_CCA}} + T_{\text{RACH_CCA}},$$

where:

$T_{\text{RRC_procedure_delay}} = 110$ ms in the test.

$T_{\text{identify_NR_CCA}} = \text{MAX}(680 \text{ ms}, (L_1+11) \times 20 \text{ ms})$ in the test.

$T_{\text{SI_NR_CCA}} = 1280$ ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

$T_{\text{RACH_CCA}}$ is the delay uncertainty in acquiring the first available PRACH occasion in the target NR cell.

$T_{\text{RACH_CCA}} = (1+L_2) \times T_{\text{SSB_RO}} + 10 \text{ ms}$; where $T_{\text{SSB_RO}} = 10 \text{ ms}$ for FR1 PRACH configuration 1.

L_1 is the number of SMTC occasions not available at the UE due to DL CCA failures. The test equipment shall ensure that L_1 does not exceed $L_{1,\text{max}}$. In the test $L_{1,\text{max}} = L_{\text{CCA_DL}}$ which is defined in clause A.3.26.2.1.

L_2 is the consecutive number of SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failures. $L_2 = 0$ in the test.

The total delay, $T_{\text{connection_release_redirect_NR_CCA}}$, shall be less than $1410 + \text{MAX}(680, (L_1+11) \times 20) \text{ ms}$.

A.11.3 Timing

A.11.3.1 UE transmit timing

A.11.3.1.1 UE Transmit Timing Test with PCell under DL CCA

A.11.3.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeB when PCell is subject to DL CCA and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1.2.

Supported test configurations are shown in Table 11.3.1.1.1-1

Table A.11.3.1.1.1-1: Supported test configuration for UE transmit timing test

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz

For this test a single NR cell is used. Table A.11.3.1.1.1-2 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.11.3.1.1.1-3.

Table A.11.3.1.1.1-2: Cell Specific Test Parameters for UE transmit timing test

Parameter	Unit	Configuration	Test1	Test2
SSB ARFCN		1	1	1
TDD configuration		1	TDDConf.1.1 CCA	
BW _{channel}	MHz	1	40: N _{RB,c} = 106	
Initial BWP Configuration		1	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1	DLBWP.1.1 ULBWP.1.1	
DRX Cycle	ms	1	N/A	DRX.8 ^{Note5}
DL CCA model		1	As specified in clause A.3.26.2.1	
UL CCA model		1	As specified in clause A.3.26.2.2	
PDSCH Reference measurement channel		1	SR.1.1 CCA	
RMSI CORESET Reference Channel		1	CR.1.1 CCA	
Dedicated CORESET Reference Channel		1	CCR.1.1 CCA	
OCNG Patterns		1	OP.1	

SSB configuration	Semi- static channel acces		1	SSB.1 CCA	
	Dynamic channel acces		1	SSB.2 CCA	
SMTC Configuration			1	SMTC.1 FR1	
TRS configuration			1	TRS.1.2 TDD	
DL CCA probability for semi-static channel access (P_{CCA_DL})			1	0.9375	0.9375
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)			1	0.75	0.75
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)			1	0.75	0.75
UL CCA probability (P_{CCA_UL})			1	1	1
EPRE ratio of PSS to SSS		dB	1	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} ^{Note2}					
$\hat{E}_s / I_{ot}$			1	3	3
$\hat{E}_s / N_{oc}$			1	3	3
SS-RSRP ^{Note3}		dBm/30 kHz	1	-92	-92
Io ^{Note3}		dBm/38.1MHz	1	-59.2	-59.2
Propagation condition			1	AWGN	
SRS Config			1	SRSCConf.1 ^{Note6}	SRSCConf.2 ^{Note6}
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5: DRX related parameters are given in Table A.3.3.8-1					
Note 6: SRS configs are given in Table A.11.3.1.1.1-3					
Note 7: Parameters P_{CCA_DL} , $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.26.2.					
Note 8: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.					

Table A.11.3.1.1.1-3: SRS Configuration for UE transmit timing test

	Field	SRSCConf.1	SRSCConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceSetList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	

combOffset-n2	0	0	
cyclicShift-n2	0	0	
resourceMapping startPosition	0	0	
resourceMapping nrofSymbols	n1	n1	
resourceMapping repetitionFactor	n1	n1	
freqDomainPosition	0	0	
freqDomainShift	0	0	
freqHopping c-SRS	14 for test configuration 1,2 25 for test configuration 3	25	Matches $N_{RB,c}$
freqHopping b-SRS	0	0	
freqHopping b-hop	0	0	
groupOrSequenceHopping	Neither	Neither	
resourceType	Periodic	Periodic	
periodicityAndOffset-p	sl1, 0	sl640, 0	Offset to align with DRX periodicity
sequenceId	0	0	Any 10 bit number

A.11.3.1.1.2 Test requirements

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test

- 1) Setup NR PCell according to parameters given in Table A.11.3.1.1.1-1.
- 2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.
 - a. The N_{TA} offset value (in T_c units) is 25600
 - b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1
- 3) The test system shall adjust the timing of the DL path by values given in Table A.11.3.1.1.2-1

Table A.11.3.1.1.2-1: Adjustment Value for DL Timing

SCS of SSB signals (KHz)	Adjustment Value	
	Test1	Test2
30	$+32 \times 64 T_c$	$+16 \times 64 T_c$

- 4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in clause 7.1.2 Table 7.1.2.1-1 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first detected path (in time) of DL SSB. Skip this step for test 2 with DRX configured.
- 5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment

A.11.3.2 UE timing advance

A.11.3.2.1 UE Timing Advance Adjustment Accuracy with PCell under DL CCA

A.11.3.2.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3.

A.11.3.2.1.2 Test Parameters

Supported test configurations are shown in table A.11.3.2.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.11.3.2.1.2-2, A.11.3.2.1.2-3 and A.11.3.2.1.2-4.

In all test cases, single cell is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.11.3.2.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in Clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to Clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.11.3.2.1.2-2. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3.2.1, the UE adjusts its uplink timing at slot n+k for a timing advance command received in slot n. This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.11.3.2.1.2-1: Supported test configuration for timing advance test

Config	Description
1	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE supporting SA operation only on NR band(s) with shared spectrum access is required to be tested

Table A.11.3.2.1.2-2: General test parameters for timing advance test

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 30 kHz SCS $N_{TA_new} = N_{TA_old} + 4096 \cdot T_c$ (based on equation in clause 4.2 of TS 38.213 [3])

T1	s	5	
T2	s	5	

Table A.11.3.2.1.2-3: Cell specific test parameters for timing advance test

Parameter		Unit	Test1	
			T1	T2
TDD configuration		Config 1		TDDConf.1.1 CCA
BW _{channel}		Config 1	MHz	40: N _{RB,c} = 106
BWP BW		Config 1	MHz	40: N _{RB,c} = 106
DRX Cycle		Config 1	ms	Not Applicable
DL CCA model		Config 1		As specified in clause A.3.26.2.1
UL CCA model		Config 1		As specified in clause A.3.26.2.2
PDSCH Reference measurement channel		Config 1		SR.1.1 CCA
CORESET Reference Channel		Config 1		CR.1.1 CCA
TRS configuration		Config 1		TRS.1.2 TDD
OCNG Patterns		Config 1		OCNG pattern 1
SMTTC configuration		Config 1		SMTTC.1 FR1
SSB configuration	Semi-static channel access	Config 1		SSB.1 CCA
	Dynamic channel access	Config 1		SSB.2 CCA
DL CCA probability for semi-static channel access (P _{CCA_DL})		Config 1		1
DL CCA model probability for dynamic static channel access (P _{CCA_DL_1})		Config 1		1
DL CCA model probability for dynamic static channel access (P _{CCA_DL_2})		Config 1		1
UL CCA probability P _{CCA}		Config 1		1
EPRE ratio of PSS to SSS		dB		0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N _{oc} ^{Note2}	Config 1	dBm/30 kHz	-95	
$\hat{E}_s / I_{ot}$		dB	3	
$\hat{E}_s / N_{oc}$		dB	3	
I _o ^{Note3}	Config 1	dBm/38.16MHz	-62.58	
Propagation condition			-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Parameters P_{CCA_DL} , $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.26.2.
Note 5:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table A.11.3.2.1.2-4: Sounding Reference Symbol Configuration for Timing Advance Accuracy Test

Field	Value	Comment
c-SRS	24	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting: SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note:	For further information see clause 6.3.2 in TS 38.331 [2].	

A.11.3.2.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. $k+1$ slots after the reception of the timing advance command, where $k=5$.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.11.4 Signalling characteristics

A.11.4.1 Radio link monitoring

A.11.4.1.1 Introduction

In the test cases specified in clause A.11.4.1, any uplink signal transmitted by the UE is used for detecting the in-/out-of-sync state of the UE. In terms of measurement, the uplink signal is verified based on the UE output power:

- UE output power higher than Transmit OFF power -50 dBm (as defined in TS 38.101-1 [18]) means uplink signal.

- UE output power equal to or less than Transmit OFF power -50 dBm (as defined in TS 38.101-1 [18]) means no uplink signal.

For intra-band contiguous carrier aggregation, transmit OFF power is measured as the mean power per component carrier.

For UE with multiple transmit antennas, transmit OFF power is measured as the mean power at each transmit connector.

A.11.4.1.2 Radio link monitoring out-of-sync test for PCell configured with SSB-based RLM RS in non-DRX mode

A.11.4.1.2.1 Test purpose and environment

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 PCell radio link monitoring requirements in clause 8.1A.

In the test, UE is configured to perform RLM based on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.11.4.1.2.1-1. The test parameters are given in Tables A.11.4.1.2.1-2, A.11.4.1.2.1-3, and A.11.4.1.2.1-4 below. There is one cell (Cell 1), which is the active NR cell in FR1, in the test. Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model.

The test consists of three successive time periods, with time duration of T1, T2 and T3, respectively. Figure A.11.4.1.2.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE transmits according to UL CCA model. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40 ms) in the test.

Table A.11.4.1.2.1-1: Supported test configurations.

Configuration	Description
1	TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.4.1.2.1-2: General test parameters for PCell out-of-sync testing in non-DRX mode.

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
DL CCA model			As specified in clause A.3.26.2.1
UL CCA model			As specified in clause A.3.26.2.2
Duplex mode	Config 1		TDD
BW _{channel}	Config 1	MHz	40: N _{RB,C} = 106
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
TDD configuration	Config 1		TDDConf.1.1 CCA

CORESET Reference Channel	Config 1		CR.1.1 CCA
SSB configuration for semi-static channel access ^{Note 3, 5}	Config 1		SSB.1 CCA
SSB configuration for dynamic channel access ^{Note 4, 5}	Config 1		SSB.2 CCA
DBT window configuration	Config 1		DBT.1
PDSCH/PDCCH subcarrier spacing	Config 1		30 kHz
PRACH Configuration	Config 1		FR1 PRACH configuration 1 under CCA
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1		TRS.1.2 TDD
T1		s	0.2
T2		s	1.04
T3		s	1.04
D1		s	1
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.			
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.			
Note 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.11.4.1.2.1-3: Cell-specific test parameters for PCell out-of-sync testing in non-DRX mode.

Parameter		Unit	Test 1					
			T1	T2	T3			
DL CCA probability P_{CCA_DL}	Note 6,8		$P_{CCA_DL}=0.9375$					
	Note 7,8		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$					
UL CCA probability P_{CCA_UL}			1					
EPRE ratio of PDCCH DMRS to SSS		dB	4					
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB	0					
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
$SNR^{Note\ 3,4}$ on RLM-RS	Config 1	dB	1	-7	-15			
SNR on other channels and signals	Config 1	dB	1					
N_{oc}	Config 1	dBm/ SCS	-95					
Propagation condition			TDL-C 300 ns 100 Hz					
NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during muted slots or during DBT windows.								
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.								
NOTE 3: SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT windows.								
NOTE 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3, respectively, in Figure A.10.4.1.2.1-1.								
NOTE 5: The SNR values are specified for testing a UE which supports 2 RX on at least one band. For testing of a UE which supports 4 RX on all bands, the SNR during T3 is A.3.6.								
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.								
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.								
NOTE 8: For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.								

Table A.11.4.1.2.1-4: Measurement gap configuration for PCell out-of-sync testing in non-DRX mode.

Field	Test 1	
	Value	
<i>gapOffset</i>	0	
NOTE: Ensure that RLM RS is partially overlapped with measurement gap0		

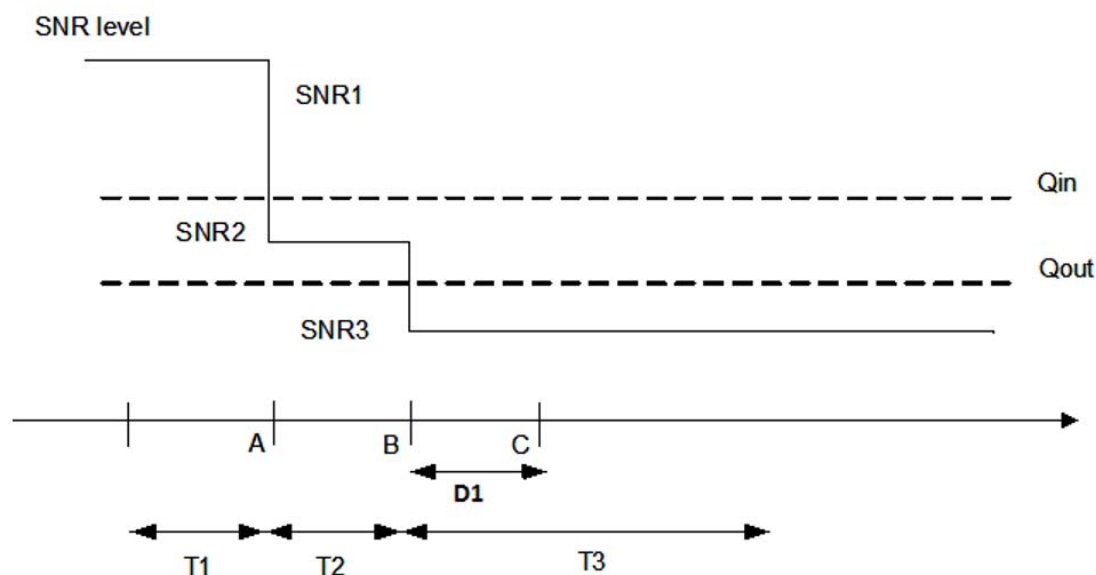


Figure A.11.4.1.2.1-1: SNR variation for out-of-sync testing.

A.11.4.1.2.2 Test requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

- During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.
- The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.11.4.1.3 Radio link monitoring in-sync test for PCell configured with SSB-based RLM RS in non-DRX mode

A.11.4.1.3.1 Test purpose and environment

The purpose of this test is to verify that the UE properly detects the out-of-sync and in-sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 PCell radio link monitoring requirements in clause 8.1A.

In the test, UE is configured to perform RLM based on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.11.4.1.3.1-1. The test parameters are given in Tables A.11.4.1.3.1-2, and A.11.4.1.3.1-3 below. There is one cell (Cell 1), which is the active NR cell in FR1, in the test. Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model.

The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5, respectively. Figure A.11.4.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states.

Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE transmits according to UL CCA model.

Table A.11.4.1.3.1-1: Supported test configurations.

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 40 MHz

Table A.11.4.1.3.1-2: General test parameters for PCell in-sync testing in non-DRX mode.

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
DL CCA model			As specified in clause A.3.26.2.1
UL CCA model			As specified in clause A.3.26.2.2
Duplex mode	Config 1		TDD
BW _{channel}	Config 1	MHz	40: N _{RB,c} = 106
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
TDD Configuration	Config 1		TDDConf.1.1 CCA
CORESET Reference Channel	Config 1		CR.1.1 CCA
SSB configuration for semi-static channel access ^{Note 3, 5}	Config 1		SSB.1 CCA
SSB configuration for dynamic channel access ^{Note 4,5}	Config 1		SSB.2 CCA
DBT window configuration	Config 1		DBT.1
PDSCH/PDCCH subcarrier spacing	Config 1		30 kHz
PRACH Configuration	Config 1		FR1 PRACH configuration 1 under CCA
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4

	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N/A
Layer 3 filtering			Enabled
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.52
T4		s	0.2
T5		s	2.04
D1		s	2
NOTE 1: All configurations are assigned to the UE prior to the start of time period T1.			
NOTE 2: UE-specific PDCCH is not transmitted after T1 starts.			
NOTE 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.			
NOTE 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.			
NOTE 6: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.11.4.1.3.1-3: Cell-specific test parameters for PCell in-sync testing in non-DRX mode.

Parameter	Unit	Test 1
-----------	------	--------

			T1	T2	T3	T4	T5
DL CCA probability P _{CCA_DL}	Note 6,8		P _{CCA_DL} =0.9375				
	Note 7,8		P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75				
UL CCA probability P _{CCA_UL}			1				
L _{CCA_DL}			7				
W _{CCA_DL}		ms	T _{Evaluate_in_SSB,CCA} NOTE 9				
EPRE ratio of PDCCH DMRS to SSS		dB	4				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1	-7	-15	-4.5	1
SNR on other channels and signals	Config 1	dB	1				
N _{oc}	Config 1	dBm/SCS	-95				
Propagation condition			TDL-C 300ns 100Hz				
NOTE 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in slots with RMC burst transmission and is not transmitted during muted slots or during DBT windows.							
NOTE 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
NOTE 3: SNR levels correspond to the signal to noise ratio over the transmitted SSS REs during DBT windows.							
NOTE 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.11.4.1.3.1-1.							
NOTE 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4 RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.							
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.							
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.							
NOTE 8: For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.							
NOTE 9: As defined in Table 8.1A.2.2-1.							

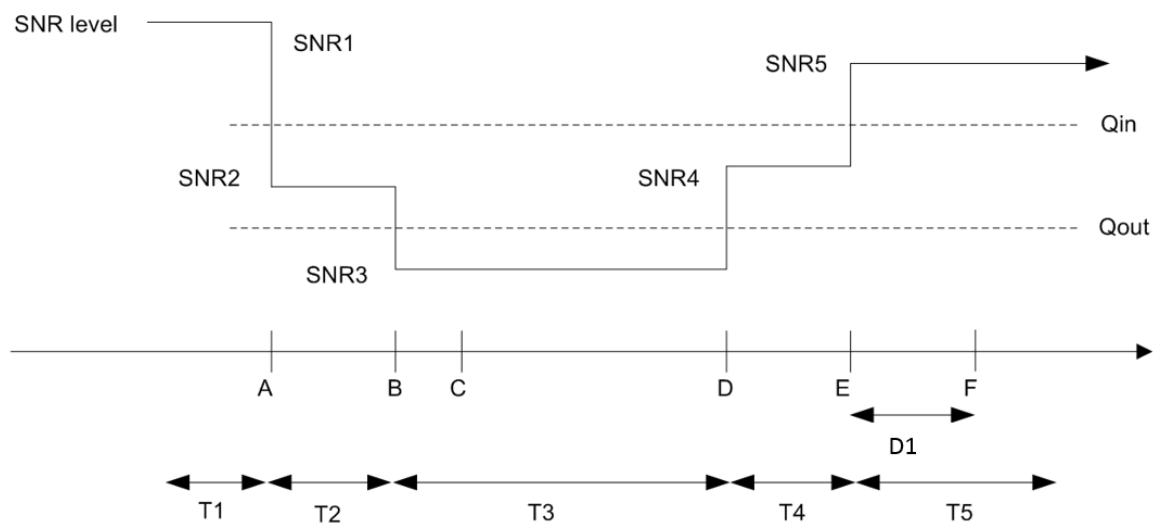


Figure A.11.4.1.3.1-1: SNR variation for in-sync testing.

A.11.4.1.3.2 Test requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

- During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.11.4.1.4 Void

A.11.4.1.4.1 Void

A.11.4.1.4.2 Void

A.11.4.1.5 Void

A.11.4.1.5.1 Void

A.11.4.1.5.2 Void

A.11.4.2 Void

A.11.4.3 SCell activation and deactivation delay

A.11.4.3.1 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

A.11.4.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for SCell, with PCell and SCell both under CCA, are within the requirements stated in clause 8.3A, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 160 ms.

The supported test configurations are shown in Table A.11.4.3.1.1-1.

The test parameters are given in Table A.11.4.3.1.1-2 and cell-specific parameters in Table A.11.4.3.1.1-3 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two carriers, each with one cell: Cell 1 (PCell) on radio channel 1 (PCC) in NR with CCA, and Cell2 (SCell) on radio channel 2 (SCC) in NR with CCA. Before the test starts the UE is connected to Cell 1, but is not aware of Cell 2, as the UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. At the end of T1, the test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m , defines the start of time period T2. The UE shall be able to report a valid CSI in PCell for the activated SCell at latest in slot $m + (T_{\text{HARQ}} + T_{\text{activation_time_withCCA}} + T_{\text{CSI_Reporting_withCCA}}) / \text{NR_slot_length}$, as defined in clause 8.3A.2. The UE shall start reporting CSI in PCell in first available uplink resource for CSI reporting after at least one CSI-RS transmission occasion for channel measurement and reporting following slot $m + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption shall fall within the time window specified in clause 8.3.2.

The point in time at which the MAC message is received by at the UE antenna connector, in a slot # denoted n , defines the start of time period T3. The UE shall complete the activation at latest in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$. Any PCell interruption shall fall within the time window specified in clause 8.3A.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received, while taking into account CCA failures on SCC.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for SCell is discontinued.

Table A.11.4.3.1.1-1: Supported test configurations for SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 160 ms SCell measurement cycle

Configuration	Description
1	With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.4.3.1.1-2: General test parameters for known SCell activation with PCell and SCell under CCA, 160 ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two radio channels (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every second subframe
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μs	0	
Time alignment error between cell2 and cell1	μs	$\leq$ TAE as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T _{HARQ}	ms	$k_1 \times \text{NR slot length}$	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
T _{CSI_Reporting}	ms	$10 + 5 \cdot 2^{\mu_{DL}}$	The delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2] μ_{DL} is the subcarrier spacing configuration for DL

Table A.11.4.3.1.1-3: Cell specific test parameters for known SCell activation case with PCell and SCell under CCA, 160 ms SCell measurement cycle

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1		TDD			TDD		
TDD configuration	Config 1		TDDConf.1.1 CCA			TDDConf.1.1 CCA		

BW _{channel}	Config 1	MHz	40: N _{RB,c} = 106	40: N _{RB,c} = 106
DL CCA model			As specified in clause A.3.26.2.1	As specified in clause A.3.26.2.1
UL CCA model			As specified in clause A.3.26.2.2	As specified in clause A.3.26.2.2
DL CCA probability for semi-static channel access ^{Note5,7}	P _{CCA_DL}		0.9375	0.9375
DL CCA probability for dynamic channel access ^{Note6,7}	P _{CCA_DL_1}		0.75	0.75
	P _{CCA_DL_2}		0.75	0.75
UL CCA probability for semi-static channel access	P _{CCA_UL}		0.87	0.87
UL CCA probability	P _{CCA_UL}		0.75	0.75
L _{CCA_DL} ^{Note 8}			2	2
W _{CCA_DL} ^{Note 8}		ms	T _{activation_time_withCCA}	T _{activation_time_withCCA}
Initial downlink BWP configuration			DLBWP.0.2	DLBWP.0.2
Initial uplink BWP configuration			ULBWP.0.1	ULBWP.0.1
Dedicated downlink BWP configuration			DLBWP.0.2	DLBWP.0.2
Dedicated uplink BWP configuration			ULBWP.0.1	ULBWP.0.1
TCI state			TCI.State.0	TCI.State.0
TRS Configuration	Config 1		TRS.1.2 TDD	TRS.1.2 TDD
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA	SR.1.1 CCA
Dedicated CORESET parameters	Config 1		CCR.1.3 CCA	SR.1.1 CCA
RMSI CORESET parameters	Config 1		CR.1.1 CCA	SR.1.1 CCA
OCNG Patterns ^{Note1}			OP.1	OP.1
SSB Configuration for semi-static channel access ^{Note5,7}	Config 1		SSB.1 CCA	SSB.1 CCA
SSB Configuration for dynamic channel access ^{Note6,7}	Config 1		SSB.2 CCA	SSB.2 CCA
SMTC configuration			SMTC.1	SMTC.1
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS ^{Note1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note1}				
N _{oc} ^{Note2}	Config 1	dBm/15kHz	-104	-104
N _{oc} ^{Note2}	Config 1	dBm/SCS	-101	-101
$\bar{E}_s/I_{ot}$		dB	17	17
$\bar{E}_s/N_{oc}$		dB	17	17
SS-RSRP ^{Note3}	Config 1	dBm/SCS	-84	-84
I ₀ ^{Note3}	Config 1	dBm/38.16MHz	-52.87	-52.87
Propagation condition		-	AWGN	
Note 1: OCNG shall be used such that resources in the cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts. OCNG is not transmitted during muted slots or during DBT windows.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 3: SS-RSRP, SCH_RP and I ₀ levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.				

Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
Note 8:	As specified in clause 8.3A for $L_{1,max}$, $L_{2,1,max}$, $L_{2,2,max}$, $L_{3,1,max}$, and $L_{3,2,max}$

A.11.4.3.1.2 Test Requirements

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [3] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot $m + (T_{HARQ} + T_{activation_time_withCCA} + T_{CSI_Reporting_withCCA}) / NR_slot_length$, where $T_{activation_time_withCCA} = T_{FirstSSB} + L_1 \cdot T_{IS} + 5ms$, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ} + 3ms}{NR_slot_length}$, as defined in clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot $m + 1 + \frac{T_{HARQ}}{NR_slot_length}$ to slot $m + 1 + \frac{T_{HARQ} + 3 + T_X}{NR_slot_length}$ with $T_X = T_{FirstSSB}$.

During T3, interruption on PCell shall not occur outside slot $n + 1 + T_{HARQ} / NR_slot_length$ to slot $n + 1 + (T_{HARQ} + 3ms) / NR_slot_length$.

The interruption on PCell shall not be more than specified for SA in clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.11.4.3.2 SCell Activation and Deactivation of known SCell with PCell and SCell under CCA, 640 ms SCell measurement cycle

A.11.4.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for SCell, with PCell and SCell under CCA, are within the requirements stated in clause 8.3A, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 640 ms.

The supported test configurations are same as in Table A.11.4.3.1.1-1 above.

The test parameters are same as in Table A.11.4.3.1.1-2 above, except for parameters listed below in Table A.11.4.3.2.1-1. The cell-specific parameters are same as in Table A.11.4.3.1.1-3 above.

The test execution is the same as described in clause A.11.4.3.1 above.

Table A.11.4.3.2.1-1: General test parameters for known SCell activation with PCell and SCell under CCA, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

A.11.4.3.2.2 Test Requirements

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [3] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot $m + (T_{\text{HARQ}} + T_{\text{activation_time_withCCA}} + T_{\text{CSI_Reporting_withCCA}}) / \text{NR_slot_length}$, where $T_{\text{activation_time_withCCA}} = T_{\text{FirstSSB_MAX}} + L_{2,1} * T_{\text{SMTc_MAX}} + (1 + L_{2,2}) * T_{\text{rs}} + 5\text{ms}$, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR_slot_length}}$, as defined in clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR_slot_length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3 + T_{\text{x}}}{\text{NR_slot_length}}$ with $T_{\text{x}} = T_{\text{FirstSSB_MAX}} + L_{2,1} * T_{\text{SMTc_MAX}}$.

During T3, interruption on PCell shall not occur outside slot $n + 1 + T_{\text{HARQ}} / \text{NR_slot_length}$ to slot $n + 1 + (T_{\text{HARQ}} + 3\text{ms}) / \text{NR_slot_length}$.

The interruption on PCell shall not be more than specified for SA in clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.11.4.3.3 SCell Activation and Deactivation of unknown SCell with PCell and SCell under CCA

A.11.4.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for SCell, with PCell and SCell under CCA, are within the requirements stated in clause 8.3A, when the SCell is unknown to the UE at the time of activation.

The supported test configurations are same as in Table A.11.4.3.1.1-1 above.

The test parameters are same as in Table A.11.4.3.1.1-2 above, except for parameters listed below in Table A.11.4.3.3.1-1. The cell-specific parameters are same as in Table A.11.4.3.1.1-3 above.

The test execution is the same as described in clause A.11.4.3.1 above.

Table A.11.4.3.3.1-1: General test parameters for unknown SCell activation with PCell and SCell under CCA

Parameter	Unit	Value	Comment
T1	s	0.1	During this time period the PCell shall be known and the SCell configured, but not detected.

A.11.4.3.3.2 Test Requirements

During T2, starting after at least one CSI-RS transmission occasion for channel measurement and reporting from the slot specified in clause 4.3 of TS 38.213 [3] and until the UE has completed the SCell activation, the UE shall report out of range if the UE has available uplink resources to report CQI for the SCell.

During T2, the UE shall send the first valid CSI report (non-zero CQI) for the SCell in first available uplink resource for CSI reporting no later than slot $m + (T_{\text{HARQ}} + T_{\text{activation_time_withCCA}} + T_{\text{CSI_Reporting_withCCA}}) / \text{NR_slot_length}$, where $T_{\text{activation_time_withCCA}} = T_{\text{FirstSSB_MAX}} + (1 + L_{3,1}) * T_{\text{SMTC_MAX}} + (2 + L_{3,2}) * T_{\text{TS}} + 5\text{ms}$, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR_slot_length}}$, as defined in clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot $m + 1 + \frac{T_{\text{HARQ}}}{\text{NR_slot_length}}$ to slot $m + 1 + \frac{T_{\text{HARQ}} + 3 + T_{\text{X}}}{\text{NR_slot_length}}$ with $T_{\text{X}} = T_{\text{FirstSSB_MAX}} + L_{3,1} * T_{\text{SMTC_MAX}}$.

During T3, interruption on PCell shall not occur outside slot $n + 1 + T_{\text{HARQ}} / \text{NR_slot_length}$ to slot $n + 1 + (T_{\text{HARQ}} + 3\text{ms}) / \text{NR_slot_length}$.

The interruption on PCell shall not be more than specified for SA in clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.11.4.4 Beam failure detection and link recovery procedures

A.11.4.4.1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode

A.11.4.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5A.

The test parameters are given in Tables A.11.4.4.1.1-1, A.11.4.4.1.1-2, A.11.4.4.1.1-3 and A.11.4.4.1.1-4 below. There is one cell, cell 1 which is the active cell, in the test. Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.11.4.4.1.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.11.4.4.1.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. The UE transmits the reporting according to UL CCA mode. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40 ms) in test 1.

Table A.11.4.4.1.1-1: Supported test configurations for FR1 PCell with CCA

Configuration	Description
1	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth

Table A.11.4.4.1.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Value		Comment
		Test 1		
Active PSCell		Cell 1		
RF Channel Number		1		
DL CCA model		As specified in A.3.26.2.1		

UL CCA model			As specified in A.3.26.2.2		
Duplex mode	Config 1		TDD		
BWchannel	Config 1	MHz	40: NRB,c = 106		
DL initial BWP configuration	Config 1		DLBWP.0.1		
DL dedicated BWP configuration	Config 1		DLBWP.1.1		
UL initial BWP configuration	Config 1		ULBWP.0.1		
UL dedicated BWP configuration	Config 1		ULBWP.1.1		
TDD Configuration	Config 1		TDDConf.1.1 CCA		
CORESET Reference Channel	Config 1		CR.1.1 CCA		
SSB Configuration	Config 1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access		
DBT Window Configuration	Config 1		DBT.1		
PDSCH/PDCCH subcarrier spacing	Config 1		30 KHz		
PRACH Configuration	Config 1		Table A.3.8A.2.2-1		
SSB Index assigned as BFD RS (q_0)			0		
SSB Index assigned as CBD RS (q_1)			1		
OCNG parameters			OP.1		
CP length			Normal		
Correlation Matrix and Antenna Configuration			2x2 Low		
Beam failure detection transmission parameters	DCI format		1-0		
	Number of Control OFDM symbols		2		
	Aggregation level	CCE	8		
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0		
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0		
	DMRS precoder granularity		REG bundle size		
	REG bundle size		6		
DRX			OFF		
Gap pattern ID			gp0		

gapOffset			0		
rlmInSyncOutOfSyncThreshold			absent		When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1	dBm/SCS kHz	-95		Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0		Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1		see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4		see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.2.1 TDD		
CSI-RS for tracking	Config 1		TRS.1.2 TDD		
SSB Index assigned as RLM RS			0, 1		
T310 Timer		ms	1000		
N310			2		
T1		s	0.2		During this time the the UE shall be fully synchronized to cell 1
T2		s	0.93		
T3		s	0.52		
T4		s	0		
T5		s	0.45		
D1		s	0.41		
Note 1: All configurations are assigned to the UE prior to the start of time period T1.					
Note 2: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.11.4.4.1.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
DL CCA probability P _{CCA,DL}	Note 10, 12		1.0	0.9375	0.9375	0.9375	0.9375
	Note 11, 12		1.0/1.0	0.75/0.7 5	0.75/0.7 5	0.75/0.7 5	0.75/0.7 5
UL CCA probability P _{CCA,UL}			1.0	1.0	1.0	1.0	1.0
L _{CCA_DL}			N/A	7			
W _{CCA_DL}		ms	N/A	T _{Evaluate_CBD_SSB_CCA} ^{Note 13}			
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					

EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1	dB	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1	dB	-10	-10	10	10	10
SSB_RP of set q_1	Config 1	dBm/S CS kHz	-105	-105	-85	-85	-85
N_{oc}	Config 1	dBm/15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio the transmitted SSS REs during DBT window.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.						
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6A.						
Note 10:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						
Note 11:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2} .						
Note 12:	For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.						
Note 13:	As defined in Table 8.5A.5.2-1.						

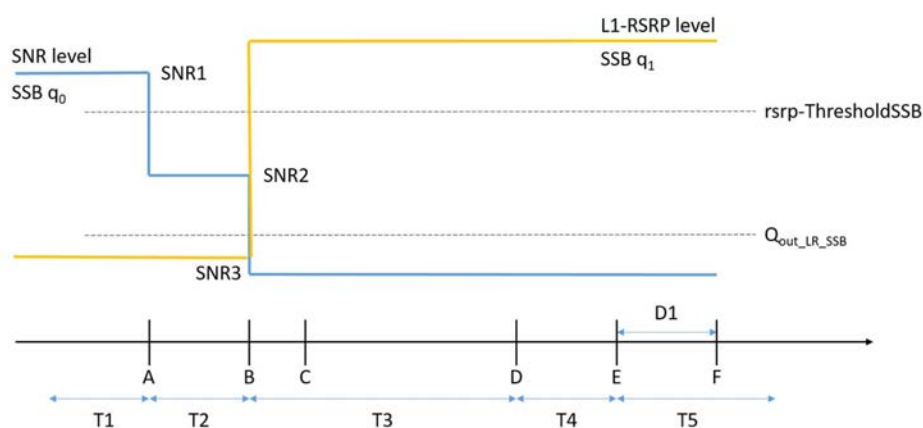


Figure A.11.4.4.1.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.11.4.4.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 410$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.11.4.4.2 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode

A.11.4.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5A.

The test parameters are given in Tables A.11.4.4.2.1-1, A.11.4.4.2.1-2, and A.11.4.4.2.1-3 below. There is one cell, cell 1 which is the active cell, in the test. Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.11.4.4.2.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.11.4.4.2.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. The UE transmits the reporting according to UL CCA mode. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.11.4.4.2.1-1: Supported test configurations for FR1 PCell with CCA

Configuration	Description
1	TDD duplex mode, 30 kHz SSB SCS, 40 MHz bandwidth

Table A.11.4.4.2.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Value		Comment
		Test 1		
Active PCell		Cell 1		
RF Channel Number		1		
DL CCA model		As specified in A.3.26.2.1		

UL CCA model			As specified in A.3.26.2.2		
Duplex mode	Config 1		TDD		
BWchannel	Config 1	MHz	40: NRB,c = 106		
DL initial BWP configuration	Config 1		DLBWP.0.1		
DL dedicated BWP configuration	Config 1		DLBWP.1.1		
UL initial BWP configuration	Config 1		ULBWP.0.1		
UL dedicated BWP configuration	Config 1		ULBWP.1.1		
TDD Configuration	Config 1		TDDConf.1.1 CCA		
CORESET Reference Channel	Config 1		CR.1.1 CCA		
SSB Configuration	Config 1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access		
DBT Window Configuration	Config 1		DBT.1		
PDSCH/PDCCH subcarrier spacing	Config 1		30 KHz		
PRACH Configuration	Config 1		Table A.3.8A.2.2-1		
SSB Index assigned as BFD RS (q_0)			0		
SSB Index assigned as CBD RS (q_1)			1		
OCNG parameters			OP.1		
CP length			Normal		
Correlation Matrix and Antenna Configuration			2x2 Low		
Beam failure detection transmission parameters	DCI format		1-0		
	Number of Control OFDM symbols		2		
	Aggregation level	CCE	8		
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0		
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0		
	DMRS precoder granularity		REG bundle size		
	REG bundle size		6		
DRX			DRX.7		A.3.3.7
Gap pattern ID			N.A.		

rlmInSyncOutOfSyncThreshold			absent		When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1	dBm/SCS kHz	-95		Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0		Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1		see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4		see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.2.1 TDD		
CSI-RS for tracking	Config 1		TRS.1.2 TDD		
SSB Index assigned as RLM RS			0, 1		
T310 Timer		ms	1000		
N310			2		
T1		s	1		During this time the UE shall be fully synchronized to cell 1
T2		s	9.01		
T3		s	5.16		
T4		s	0		
T5		s	3.89		
D1		s	3.85		
Note 1: All configurations are assigned to the UE prior to the start of time period T1.					
Note 2: UE-specific PDCCH is not transmitted after T1 starts.					

Table A.11.4.4.2.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
DL CCA probability P_{CCA}	Note 10, 12		1.0	0.9375	0.9375	0.9375	0.9375
	Note 11, 12		1.0/1.0	0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA}			1.0	1.0	1.0	1.0	1.0
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					

EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1	dB	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1	dB	-10	-10	10	10	10
SSB_RP of set q_1	Config 1	dBm/S CS kHz	-105	-105	-85	-85	-85
N_{oc}	Config 1	dBm/15 KHz	-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio the transmitted SSS REs during DBT window.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.						
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6A.						
Note 10:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						
Note 11:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2} .						
Note 12:	For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.						

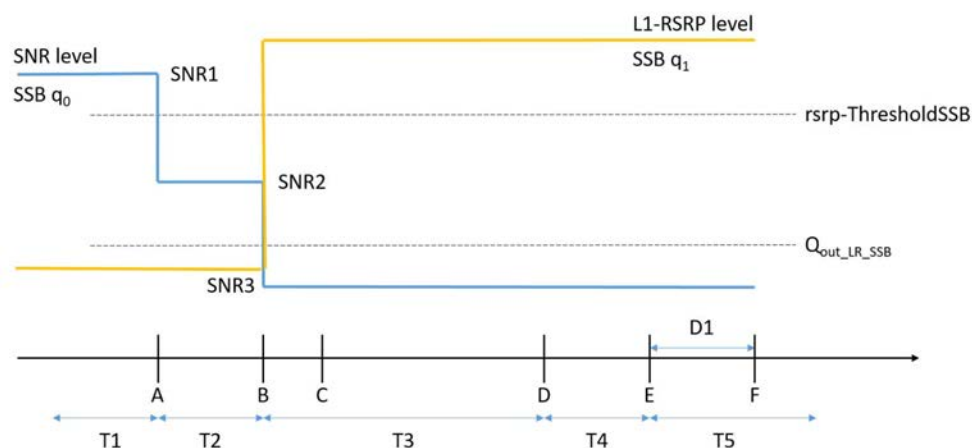


Figure A.11.4.2.1-1: SNR and L1-RSRP variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.11.4.4.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 3850$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.11.4.5 Active BWP switching

A.11.4.5.1 UL active BWP switch delay with consistent UL LBT failure on PCell subject to UL CCA

A.11.4.5.1.1 Test Purpose and Environment

The purpose of this test is to verify the UL BWP switch delay requirement defined in clause 8.6.4.

The supported test configurations are shown in Table A.11.4.5.1.1-1. The test scenario comprises of one cell (Cell 1), which is Pcell as given in Table A.11.4.5.1.1-2. Cell-specific parameters of the cell are specified in Table A.11.4.5.1.1-3 below. SRS configuration used in the test is specified in Table A.11.4.5.1.1-4.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink and uplink bandwidth parts: DL BWP-1, DL BWP-2, UL BWP-1 and UL BWP-2 before starting the test. DL BWP-1 and DL BWP-2 always include bandwidth of the initial DL BWP and SSB. UL BWP-1 and UL BWP-2 always include bandwidth of the SRS.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is DL BWP-1.
- UE is indicated in *firstActiveUplinkBWP-Id* that the active UL BWP is UL BWP-1.
- UE is configured with *LBT-FailureRecoveryConfig* parameters for Cell 1.

The cell has constant signal levels throughout the test. The test consists of 2 successive time periods, with durations of T1 and T2, respectively.

During T1,

- Time period T1 starts when the UE has received the SRS configuration for periodic SRS transmission on active UL BWP-1.
- The UE shall perform UL CCA before SRS transmission.
- The parameter UL CCA probability P_{CCA} is set to 0 during T1. This requires the test system to set energy level above the detection level during portion of the UL slot where the UE performs UL CCA. This in turn forces the UE to fail the UL CCA. The UE consistently fails UL CCA during T1 and is therefore unable to transmit SRS.

During T2,

- T2 starts when the UE detects consistent UL LBT failures i.e. when total number of UL LBT failures in cell1 on active UL BWP-1 exceeds *lbt-FailureInstanceMaxCount* during *lbt-FailureDetectionTimer*.
- The UE upon detected consistent UL LBT failure starts the LBT recovery mechanism, which requires the UE to switch to active UL BWP-2 in Cell 1 and to send PRACH in the active UL BWP-2.
- Starting from T2, the UE shall be able to send PRACH in the active UL BWP-2 within the delay specified in clause 8.6.4.

Table A.11.4.5.1.1-1: Supported test configurations for UL BWP switch test in SA

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: void	

Table A.11.4.5.1.1-2: General test parameters for UL BWP switch test in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell1 on RF channel number 1.
CP length		Normal	
DRX		OFF	
<i>lbt-FailureDetectionTimer</i> [2]	ms	80	Parameter configured by IE: <i>LBT-FailureRecoveryConfig</i> [1]
<i>lbt-FailureInstanceMaxCount</i> [2]		4	Parameter configured by IE: <i>LBT-FailureRecoveryConfig</i> [1]
T1	s	0.1	During T1 consistent LBT failure is detected on active UL BWP-1
T2	s	0.1	During T2 UE sends PRACH on active UL BWP-2

Table A.11.4.5.1.1-3: NR Cell specific test parameters for UL BWP switch test in SA

Parameter		Unit	Cell 1	
			T1	T2
TDD configuration	Config 1		TDDConf.1.1 CCA	
BW _{channel}	Config 1		40 MHz: N _{RB,c} = 106	
DL CCA model	Config 1		As specified in clause A.3.26.2.1	
UL CCA model	Config 1		As specified in clause A.3.26.2.2	
Active BWP ID	Config 1		1, 2	
Initial DL BWP Configuration	Config 1		DLBWP.0.2 ^{Note 4}	
Active DL BWP-1 Configuration	Config 1		DLBWP.1.1 ^{Note 4}	
Active DL BWP-2 Configuration	Config 1		DLBWP.1.3 ^{Note 4}	
Initial UL BWP Configuration	Config 1		ULBWP.0.2 ^{Note 4}	
Active UL BWP-1 Configuration	Config 1		ULBWP.1.1 ^{Note 4}	
Active UL BWP-2 Configuration	Config 1		ULBWP.1.3 ^{Note 4}	
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA	
RMSI CORESET parameters	Config 1		CR.1.1 CCA	
Dedicated CORESET parameters	Config 1		CCR.1.3 CCA	
OCNG Patterns	Config 1		OP.1	
SSB Configuration	Semi- static channel acces	Config 1	SSB.1 CCA	
	Dynamic channel acces	Config 1	SSB.2 CCA	
SMTc Configuration	Config 1		SMTc.1 FR1	
Correlation Matrix and Antenna Configuration	Config 1		1x2 Low	

TRS Configuration	Config 1		TRS.1.2 TDD	
DL CCA probability for semi-static channel access (P_{CCA_DL})	Config 1		1	1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_1}$)	Config 1		1	1
DL CCA model probability for dynamic static channel access ($P_{CCA_DL_2}$)	Config 1		1	1
UL CCA probability (P_{CCA_UL})	Config 1		0	1
PRACH configuration	Config 1		N/A	Configuration #1 in Table A.3.8.2.1-1
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note 2}	Config 1	dBm/SCS	-101	
SS-RSRP ^{Note 3}	Config 1	dBm/SCS	-84	
$\bar{E}_s/I_{ot}$	Config 1	dB	17	
$\bar{E}_s/N_{oc}$	Config 1	dB	17	
I_o ^{Note3}	Config 1	dBm/38.16MHz	-52.86	
Propagation Condition			AWGN	
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].				
Note 5: Parameters P_{CCA_DL} , $P_{CCA_DL_1}$, $P_{CCA_DL_2}$ and P_{CCA_UL} are defined in clause A.3.26.2.				
Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.				

Table A.11.4.5.1.1-4: Sounding Reference Symbol Configuration for UL BWP Switch Test

Field	Value	Comment
c-SRS	24	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting: SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	

combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.11.4.5.1.2 Test Requirements

The UE capable of *bwp-SwitchingDelay type1* [2] shall start to transmit the PRACH on active UL BWP-2 of Cell 1 (PCell) less than 21.5 ms from the beginning of time period T1.

The UE capable of *bwp-SwitchingDelay type2* [2] shall start to transmit the PRACH on active UL BWP-2 of Cell 1 (PCell) less than 23 ms from the beginning of time period T1.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The above delay is calculated as follows:’

The active UL BWP switch delay from UL BWP-1 to UL BWP-2 can be expressed as:

$$T_{\text{BWPswitchDelay}} * T_{\text{slot}} + 1 * T_{\text{slot}} + (1 + L_3) * T_{\text{SSB,RO}} + 10 \text{ ms}$$

Where:

$T_{\text{BWPswitchDelay}}$ = 1 ms (2 slots) and 2.5 ms (5 slots) for *bwp-SwitchingDelay* [2] *type1* and *type2* UE capabilities according to clause 8.6.4.

T_{slot} = It is the slot length. It is 0.5 ms for 30 kHz.

L_3 = It is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $L_3 = 0$ during T2 since $P_{\text{CCA}} = 1$.

$T_{\text{SSB,RO}}$ = 10 ms according to FR1 PRACH configuration 1.

This gives a total of 21.5 ms and 23 ms for *type1* and *type2* UE respectively.

A.11.4.5.2 DCI-based and Timer-based Active BWP Switch

A.11.4.5.2.1 NR FR1- NR FR1 DL active BWP switch of PCell with non-DRX in SA

A.11.4.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6, and interruption requirement on other active serving cell defined in clause 8.2.2.2.5.

The supported test configurations are shown in Table A.11.4.5.2.1.1-1 below. The test scenario comprises of one PCell (Cell 1) and one SCell (Cell 2) as given in Table A.11.4.5.2.1.1-2. NR Cell-specific parameters are specified in Table A.11.4.5.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE would have ACK/NACK sending except for the time duration when BWP is switching on Cell 1 and the time duration of T2.

PDCCHs indicating new transmissions shall be sent continuously on SCell (Cell 2) to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC), and Cell 2 (SCell) on radio channel 2 (SCC).

- UE is configured with 2 different UE-specific downlink bandwidth parts for PCell, BWP-1 and BWP-2, in Cell 1 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is configured with 1 UE-specific downlink bandwidth parts the same as initial BWP for SCell, BWP-0 in Cell 2 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 in PCell.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-0 in SCell.
- UE is configured with a *bwp-InactivityTimer* timer value for PCell.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for PCell DL BWP switch, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of PCell's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the PCell no later than the first UL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on PCell's BWP-2 no later than the first DL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay}$).

The starting time of SCell (Cell 2) interruption due to BWP switch on PCell shall occur within the BWP switch delay.

During T2, the test equipment won't transmit DCI format for PDSCH reception on PCell (Cell 1).

During T3,

The time period T3 starts from the slot # j , where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH no later than the first DL slot that occurs after the beginning of PCell's slot ($j + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the SCell at latest on the first UL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on PCell's BWP-1 no later than the first DL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay}$).

The starting time of SCell (Cell 2) interruption due to BWP switch of PCell shall occur within the BWP switch delay.

The test equipment verifies the DL BWP switch time in PCell by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

The test equipment verifies that potential interruption to SCell is carried out in the correct time span by monitoring ACK/NACK sent in SCell during BWP switch of PCell, respectively.

Table A.11.4.5.2.1.1-1: DL BWP switch supported test configurations

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: Void	
Note 2: The UE supporting SA operation with only NR band(s) with shared spectrum access is required to be tested.	

Table A.11.4.5.2.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1, 2	Two NR radio channels are used in this test
Active PCell		Cell 1	PCell on RF channel number 1.
Active SCell		Cell 2	SCell on RF channel number 2.
CP length		Normal	
DRX		OFF	For both PCell and SCell
DL CCA model		As specified in clause A.3.26.2.1	
UL CCA model		As specified in clause A.3.26.2.2	
<i>bwp-InactivityTimer</i>	ms	200	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
Cell-individual offset for cells on RF channel number 2	dB	0	Individual offset for cells on SCC.
Cell2 timing offset to cell1	μs	3	Time alignment error as specified in TS 38.104 [13] clause 6.5.3.1.
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.11.4.5.2.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter			Unit	Cell 1	Cell2
Frequency Range				FR1	
Duplex mode	Config 1			TDD	
TDD configuration	Config 1			TDDConf.1.1 CCA	
BW _{channel}	Config 1			40 MHz: N _{RB,c} = 106	
Active BWP ID				1, 2	0
Initial DL BWP Configuration				DLBWP.0.2 ^{Note4}	
Initial UL BWP Configuration				ULBWP.0.2 ^{Note4}	
Active DL BWP-0 Configuration				N.A.	DLBWP.0.2 ^{Note4}
Active DL BWP-1 Configuration				DLBWP.1.1 ^{Note4}	N.A.
Active DL BWP-2 Configuration				DLBWP.1.3 ^{Note4}	N.A.
Active UL BWP-0 Configuration				N.A.	ULBWP.0.2 ^{Note4}
Active UL BWP-1 Configuration				ULBWP.1.1 ^{Note4}	N.A.
Active UL BWP-2 Configuration				ULBWP.1.3 ^{Note4}	N.A.
PDSCH Reference measurement channel	Config 1			SR.1.1 CCA	
RMSI CORESET parameters	Config 1			CR.1.1 CCA	
Dedicated CORESET parameters	Config 1			CCR.1.3 CCA	
OCNG Patterns				OP.1	
SSB Configuration	Semi- static channel acces	Config 1		SSB.1 CCA	
	Dymamic channel acces	Config 1		SSB.2 CCA	
SMTc Configuration				SMTc.1	
DL CCA probability (P _{CCA_DL})				1	1
UL CCA probability (P _{CCA_UL})				1	1
Correlation Matrix and Antenna Configuration				1x2 Low	
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N _{oc} ^{Note 2}	Config 1		dBm/SCS	-101	-101

SS-RSRP ^{Note 3}	Config 1	dBm/SCS	-84	-84
$\hat{E}_s/I_{ot}$	Config 1	dB	17	17
$\hat{E}_s/N_{oc}$	Config 1	dB	17	17
I_o ^{Note 3}	Config 1	dBm/38.16MHz	-52.86	-52.86
Propagation Condition			AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].				

A.11.4.5.2.1.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(j + T_{BWPswitchDelay} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

During T1 and T3, the start time of SCell interruption during PCell active BWP switch shall not happen outside the BWP switch delay.

The interruption of SCell shall not be longer than the interruption duration specified for active BWP switch in clause 8.2.2.2.5.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch interruption to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first DL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$, $(j + T_{BWPswitchDelay} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.11.4.5.2.2 NR FR1 DL active BWP switch with non-DRX in SA

A.11.4.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6.

The supported test configurations are shown in Table A.11.4.5.2.2.1-1. The test scenario comprises of one cell (Cell 1) as given in Table A.11.4.5.2.2.1-2. Cell-specific parameters of the cell are specified in Table A.11.4.5.2.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
- UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

The cell has constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell1's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the Cell1 no later than the first UL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on Cell1's BWP-2 starting from the first DL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell1.

During T3,

The time period T3 starts from the slot # j , where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's slot ($j + T_{BWPswitchDelay}$) as defined in clause 8.6 and starts to report valid ACK/NACK for the Cell1 at latest on the first UL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on Cell1's BWP-1 starting from the first DL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

Table A.11.4.5.2.2.1-1: DL BWP switch supported test configurations

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations.
Note 2:	A UE which fulfils the requirements in test case A.11.4.5.2.1 can skip the test cases in A.11.4.5.2.2.
Note 3:	The UE supporting SA operation with only NR band(s) with shared spectrum access is required to be tested.

Table A.11.4.5.2.2.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test

Active Cell		Cell 1	Cell1 on RF channel number 1.
CP length		Normal	
DRX		OFF	
DL CCA model		As specified in clause A.3.26.2.1	
UL CCA model		As specified in clause A.3.26.2.2	
<i>bwp-InactivityTimer</i>	ms	200	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.11.4.5.2.2.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode	Config 1			TDD
TDD configuration	Config 1			TDDConf.1.1 CCA
BW _{channel}	Config 1			40 MHz: N _{RB,C} = 106
Active BWP ID				1, 2
Initial DL BWP Configuration	Config 1			DLBWP.0.2 ^{Note 4}
Active DL BWP-1 Configuration	Config 1			DLBWP.1.1 ^{Note 4}
Active DL BWP-2 Configuration	Config 1			DLBWP.1.3 ^{Note 4}
Initial UL BWP Configuration	Config 1			ULBWP.0.2 ^{Note 4}
Active UL BWP-1 Configuration	Config 1			ULBWP.1.1 ^{Note 4}
Active UL BWP-2 Configuration	Config 1			ULBWP.1.3 ^{Note 4}
PDSCH Reference measurement channel	Config 1			SR.1.1 CCA
RMSI CORESET parameters	Config 1			CR.1.1 CCA
Dedicated CORESET parameters	Config 1			CCR.1.3 CCA
OCNG Patterns				OP.1
SSB	Semi- static channel acces	Config 1		SSB.1 CCA
Configuration	Dymamic channel acces	Config 1		SSB.2 CCA
SMTc Configuration				SMTc.1
Correlation Matrix and Antenna Configuration				1x2 Low
TRS Configuration	Config 1			TRS.1.2 TDD
DL CCA probability (P _{CCA_DL})	Config 1			1
UL CCA probability (P _{CCA_UL})	Config 1			1
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N _{oc} ^{Note 2}	Config 1	dBm/SCS	-101	
SS-RSRP ^{Note 3}	Config 1	dBm/SCS	-84	
$\hat{E}_s/I_{ot}$	Config 1	dB	17	
$\hat{E}_s/N_{oc}$	Config 1	dB	17	
I _o ^{Note3}	Config 1	dBm/38.16 MHz	-52.86	
Propagation Condition				AWGN

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

A.11.4.5.2.2.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(j + T_{BWPswitchDelay} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6.2-1.

All of the above test requirements shall be fulfilled in order for the observed Cell1 active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$, $(j + T_{BWPswitchDelay} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.11.4.5.3 RRC-based Active BWP Switch

A.11.4.5.3.1 NR FR1 DL active BWP switch of Cell with non-DRX in SA

A.11.4.5.3.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6.

The supported test configurations are shown in Table A.11.4.5.3.1.1-1. The test scenario comprises of one Cell (Cell 1) as given in Table A.11.4.5.3.1.1-2. Cell-specific parameters of Cell are specified in Table A.11.4.5.3.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ as defined in clause 8.6.3 and starts to report valid ACK/NACK

for the PCell from the first UL slot that occurs after the beginning of DL slot $i +$

$\frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k1$ on BWP-1 of final condition. The UE shall be continuously

scheduled on PCell's BWP-1 of final condition starting from the first DL slot right after slot $i +$

$\frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$.

$T_{\text{RRCprocessingDelay}}$ and $T_{\text{BWPswitchDelayRRC}}$ are defined in clause 8.6.3.

The test equipment verifies the DL BWP switch time in Cell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when a valid ACK/NACK is received is received.

Table A.11.4.5.3.1.1-1: DL BWP switch supported test configurations in SA scenario

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: Void	
Note 2: The UE supporting SA operation with only NR band(s) with shared spectrum access is required to be tested.	

Table A.11.4.5.3.1.1-2: General test parameters for DL BWP switch in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DL CCA model		As specified in clause A.3.26.2.1	
UL CCA model		As specified in clause A.3.26.2.2	
DRX		OFF	
T1	s	0.2	

Table A.11.4.5.3.1.1-3: NR Cell specific test parameters for DL BWP switch in SA scenario

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1		TDD
TDD configuration		Config 1		TDDConf.1.1 CCA
BW _{channel}		Config 1		40 MHz: N _{RB,C} = 106
Active BWP ID				1
Initial DL BWP Configuration		Config 1		DLBWP.0.2
Initial UL BWP Configuration		Config 1		ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1		DLBWP.1.3
	Active UL BWP-1 Configuration	Config 1		ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration	Config 1		DLBWP.1.1
	Active UL BWP-1 Configuration	Config 1		ULBWP.1.1
PDSCH Reference measurement channel		Config 1		SR.1.1 CCA
RMSI CORESET parameters		Config 1		CR.1.1 CCA

Dedicated CORESET parameters		Config 1		CCR.1.3 CCA
OCNG Patterns				OP.1
SSB Configuration	Semi-static channel acces	Config 1		SSB.1 CCA
	Dynamic channel acces	Config 1		SSB.2 CCA
SMTC Configuration				SMTC.1
TRS Configuration		Config 1		TRS.1.2 TDD
DL CCA probability (P_{CCA_DL})		Config 1		1
UL CCA probability (P_{CCA_UL})		Config 1		1
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note 2}		Config 1	dBm/SCS	-101
SS-RSRP ^{Note 3}		Config 1	dBm/SCS	-84
$\hat{E}_s/I_{ot}$		Config 1	dB	17
$\hat{E}_s/N_{oc}$		Config 1	dB	17
I_{o} ^{Note 3}		Config 1	dBm/38.16MHz	-52.86
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.3 is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].				

A.11.4.5.3.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the Cell from the first DL slot that occurs right after the beginning of slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length} + k1$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed Cell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.11.4.6 Void

A.11.5 Measurement procedure

A.11.5.1 Intra-frequency measurements

A.11.5.1.1 Event-triggered reporting tests on PCC without gaps under non-DRX

A.11.5.1.1.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.5.1 and 9.2A.5.2.

A.11.5.1.1.2 Test parameters

Two cells are deployed in the test, which are PCell (Cell 1) and a neighbour cell (Cell 2) on the same carrier frequency with CCA transmitting SSBs in DBT windows according to DL CCA model. The test parameters for the two cells are given in Table A.11.5.1.1.2-1 and A.11.5.1.1.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

Table A.11.5.1.1.2-1: Supported test configurations

Configuration	Description
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.5.1.1.2-2: General test parameters for intra-frequency event triggered reporting without gaps

Parameter		Unit	Test configuration	Value	Comment
Active cell			1	Cell 1	
Neighbour cell			1	Cell 2	Cell to be identified.
RF Channel Number			1	1: Cell 1 and Cell 2	
DL CCA model			1	As specified in clause A.3.26.2.1	
UL CCA model			1	As specified in clause A.3.26.2.2	
SSB configuration	Semi-static channel access ^{Note 1,3}		1	SSB.1 CCA	
	Dynamic channel access ^{Note 2,3}		1	SSB.2 CCA	
SMTC configuration			1	SMTC.1	
A3-Offset		dB	1	-4.5	
CP length			1	Normal	
Hysteresis		dB	1	0	
Time To Trigger		s	1	0	
Filter coefficient			1	0	L3 filtering is not used
DRX			1	OFF	DRX is not used

Time offset between serving and neighbour cells		1	3 μ s	Synchronous cells
T1	s	1	5	
T2	s	1	5	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.				

Table A.11.5.1.1.2-3: Cell-specific test parameters for intra-frequency event-triggered reporting without gaps

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability for semi-static channel access (P_{CCA_DL})		1	$P_{CCA_DL}=0.9375$		$P_{CCA_DL}=0.9375$	
DL CCA probability for dynamic static channel access ($P_{CCA_DL_1}$)		1	$P_{CCA_DL_1}=0.75$		$P_{CCA_DL_1}=0.75$	
DL CCA probability for dynamic static channel access ($P_{CCA_DL_2}$)		1	$P_{CCA_DL_2}=0.75$		$P_{CCA_DL_2}=0.75$	
UL CCA probability P_{CCA_UL}		1	$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
L_{CCA_DL}		1	7		7	
W_{CCA_DL}	ms	1	600		600	
PDSCH RMC configuration		1	SR.1.1 CCA		N/A	
RMSI CORESET RMC configuration		1	CR.1.1 CCA		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.1 CCA		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.2 TDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46

		2				
		3				
$\hat{E}_s / N_{oc}$	dB	1	4	4	-Infinity	4
SS-RSRP ^{Note 3}	dBm/SCS kHz	1	-91	-91	-Infinity	-91
Io	dBm/38.16 MHz	1	-58.50	-56.16	-58.50	-56.16
Propagation Condition		1	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.						

A.11.5.1.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 840 ms from the beginning of time period T2.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.1.2 Event-triggered reporting tests on PCC without gaps under DRX

A.11.5.1.2.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.5.1 and 9.2A.5.2.

A.11.5.1.2.2 Test parameters

Two cells are deployed in the test, which are PCell (Cell 1) and a neighbour cell (Cell 2) on the same carrier frequency with CCA transmitting SSBs in DBT windows according to DL CCA model. The test parameters for the two cells are given in Table A.11.5.1.2.2-1 and A.11.5.1.2.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, the UE is allocated with PUSCH resource at every DRX cycle.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

Table A.11.5.1.2.2-1: Supported test configurations

Configuration	Description
1	30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.5.1.2.2-2: General test parameters for intra-frequency event triggered reporting without gaps

Parameter		Unit	Test configuration	Value		Comment
				Test 1	Test	
Active cell			1	Cell 1		
Neighbour cell			1	Cell 2		Cell to be identified.
RF Channel Number			1	1: Cell 1 and Cell 2		
DL CCA model			1	As specified in clause A.3.26.2.1		
UL CCA model			1	As specified in clause A.3.26.2.2		
SSB configuration	Semi-static channel access ^{Note 1,3}		1	SSB.1 CCA		
	Dynamic channel access ^{Note 2,3}		1	SSB.2 CCA		
SMTC configuration			1	SMTC.1		
A3-Offset		dB	1	-4.5		
CP length			1	Normal		
Hysteresis		dB	1	0		
Time To Trigger		s	1	0		
Filter coefficient			1	0		L3 filtering is not used
DRX			1	DRX.1	DRX.7	
Time offset between serving and neighbour cells			1	3 μ s		Synchronous cells
T1		s	1	5		
T2		s	1	5	15	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.						

Table A.11.5.1.2.2-3: Cell-specific test parameters for intra-frequency event-triggered reporting without gaps

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1	TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability for semi-static channel access (P_{CCA_DL})		1	$P_{CCA_DL}=0.9375$		$P_{CCA_DL}=0.9375$	

DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1	$P_{CCA_DL_1}=0.75$		$P_{CCA_DL_1}=0.75$	
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1	$P_{CCA_DL_2}=0.75$		$P_{CCA_DL_2}=0.75$	
UL CCA probability P_{CCA_UL}		1	$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
L_{CCA_DL}		1	Test 1: $L_{CCA_DL} = 5$ Test 2: $L_{CCA_DL} = 3$		Test 1: $L_{CCA_DL} = 5$ Test 2: $L_{CCA_DL} = 3$	
W_{CCA_DL}	ms	1	Test 1: $W_{CCA_DL} = 600$ Test 2: $W_{CCA_DL} = 5120$		Test 1: $W_{CCA_DL} = 600$ Test 2: $W_{CCA_DL} = 5120$	
PDSCH RMC configuration		1	SR.1.1 CCA		N/A	
RMSI CORESET RMC configuration		1	CR.1.1 CCA		N/A	
Dedicated CORESET RMC configuration		1	CCR.1.1 CCA		N/A	
OCNG Patterns		1, 2, 3	OP.1		OP.1	
TRS Configuration		1	TRS.1.2 TDD		N/A	
Initial BWP configuration		1	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1	-95			
N_{oc} Note 2	dBm/15 kHz	1	-98			
$\hat{E}_s/I_{ot}$	dB	1	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1	-91	[-91]	-Infinity	-91
I_o	dBm/38.16 MHz	1	-58.50	-56.16	[-58.50	-56.16
Propagation Condition		1	AWGN			

- Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
- Note 4: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.

A.11.5.1.2.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report with a measurement reporting delay less than 1200 ms from the beginning of time period T2.

In test 2, the UE shall send one Event A3 triggered measurement report with a measurement reporting delay less than 10240 ms from the beginning of time period T2.

Editor's note: $D1 = TBD$ ($D1$ is different for different DRX configurations).

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{TI}DCCH$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.1.3 Void

A.11.5.1.4 Void

A.11.5.1.5 Void

A.11.5.1.6 Void

A.11.5.1.7 Void

A.11.5.1.8 Void

A.11.5.1.9 Void

A.11.5.1.10 Void

A.11.5.1.11 Void

A.11.5.1.12 Void

A.11.5.2 Inter-frequency measurements

A.11.5.2.1 Void

A.11.5.2.2 Void

A.11.5.2.3 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is not used

A.11.5.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements for NR cell with CCA in clause 9.3A.4 and 9.3A.5.

In this test, there are two cells: NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters are given in Tables A.11.5.2.3.1-1, A.11.5.2.3.1-2 and A.11.5.2.3.1-3.

In this test, measurement gap pattern configuration # 0 as defined in Table A.11.5.2.3.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.11.5.2.3.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.2.3.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
-----------	------	--------------------	-------	---------

NR RF Channel Number		Config 1	1, 2	Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cells		Config 1	NR cell 1 with CCA (PCell)	NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1	NR cell 2 with CCA	NR cell 2 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1	As specified in clause A.3.26.2.1	
UL CCA model		Config 1	As specified in clause A.3.26.2.2	
Gap Pattern Id		Config 1	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	9	
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3µs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	1.7	

Table A.11.5.2.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter		Unit	Test configuration n	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD			
TDD configuration			Config 1	TDDConf.1.1 CCA			
BW _{channel}		MHz	Config 1	40: N _{RB,c} = 106			
BWP BW		MHz	Config 1	40: N _{RB,c} = 106			
BWP configuration	Initial DL BWP	Config 1	Config 1	DLBWP.0.1		NA	
	Initial UL BWP	Config 1		ULBWP.0.1		NA	
	Dedicated DL BWP	Config 1		DLBWP.1.1		NA	
	Dedicated UL BWP	Config 1		ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 CCA			
CORESET Reference Channel			Config 1	CR.1.1 CCA			

SSB parameters	Semi-static channel access ^{Note 5,7}		Config 1	SSB.1 CCA		SSB.1 CCA	
	Dynamic channel access ^{Note 6,7}		Config 1	SSB.2 CCA		SSB.2 CCA	
DBT window configuration			Config 1	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration defined in A.3.11			Config 1	SMTC.1		SMTC.4	
DL CCA probability P_{CCA_DL}	Semi-static channel access ^{Note 5,7}		Config 1	$P_{CCA_DL}=0.9375$		$P_{CCA_DL}=0.9375$	
	Dynamic channel access ^{Note 6,7}		Config 1	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	
UL CCA probability P_{CCA_UL}	Semi-static channel access ^{Note 5,7}		Config 1	$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
	Dynamic channel access ^{Note 6,7}		Config 1	$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
L_{CCA_DL}			Config 1	12		12	
W_{CCA_DL}		ms	Config 1	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	30			
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} ^{Note2}		dBm/15 kHz	Config 1	-98		-98	
N_{oc} ^{Note2}		dBm/S CS	Config 1	-95		-95	
SS-RSRP ^{Note 3}		dBm/S CS	Config 1	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1	4	4	-Infinity	7
I_0 ^{Note3}		dBm/9.36MHz	Config 1	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window..
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

A.11.5.2.3.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_without_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

$T_{\text{identify_inter_cca_without_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TTI}_{\text{DCCH}}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.2.4 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is used

A.11.5.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are two cells: NR cell 1 as PCell in FR1 with CCA on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters are given in Tables A.11.5.2.4.1-1, A.11.5.2.4.1-2 and A.11.5.2.4.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.11.5.2.4.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.11.5.2.4.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.2.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cells		Config 1	NR cell 1 with CCA (PCell)		NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1	NR cell 2 with CCA		NR cell 2 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1	As specified in clause A.3.26.2.1		
UL CCA model		Config 1	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	9		
A3-Offset	dB	Config 1	-6		
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	DRX.1	DRX.2	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3μs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	2.5	17	

Table A.11.5.2.4.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1	1		2	
Duplex mode		Config 1	TDD			
TDD configuration		Config 1	TDDConf.1.1 CCA			
BW _{channel}	MHz	Config 1	40: N _{RB,C} = 106			
BWP BW	MHz	Config 1	40: N _{RB,C} = 106			

BWP configuration	Initial DL BWP	Config 1	Config 1	DLBWP.0.1	NA
	Initial UL BWP	Config 1		ULBWP.0.1	NA
	Dedicated DL BWP	Config 1		DLBWP.1.1	NA
	Dedicated UL BWP	Config 1		ULBWP.1.1	NA
TRS configuration			Config 1	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 CCA	
SSB parameters	Semi-static channel access Note 5,7		Config 1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 6,7		Config 1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1	As defined in A.3.28.1	As defined in A.3.28.1
SMTC configuration defined in A.3.11			Config 1	SMTC.1	SMTC.4
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1	$P_{CCA_DL}=0.9375$	$P_{CCA_DL}=0.9375$
	Dynamic channel access Note 6,7		Config 1	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1	$P_{CCA_UL}=1$	$P_{CCA_UL}=1$
	Dynamic channel access Note 6,7		Config 1	$P_{CCA_UL}=1$	$P_{CCA_UL}=1$
L_{CCA_DL}			Config 1	5	
W_{CCA_DL}		ms	Config 1	$T_{PSS/SSS_sync_inter_cca}$	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	30	
EPRE ratio of PSS to SSS			Config 1	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					

N_{oc} ^{Note2}	dBm/15 kHz	Config 1	-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.						
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.						

Table A.11.5.2.4.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Value		Comment
	Test 1	Test 2	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.11.5.2.4.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.11.5.2.4.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_without_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_without_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2, the UE is not required to report SSB time index.

$T_{\text{identify_inter_cca_without_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

For test 1, DRX cycle = 40 ms and for test 2, DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TTI}_{\text{DCC}}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.11.5.2.5 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is not used

A.11.5.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are two cells: NR cell 1 as PCell in FR1 with CCA on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters are given in Tables A.11.5.2.5.1-1, A.11.5.2.5.1-2 and A.11.5.2.5.1-3.

In this test, measurement gap pattern configuration # 0 as defined in Table A.11.5.2.5.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.11.5.2.5.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.2.5.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.

Active cells		Config 1	NR cell 1 with CCA (PCell)	NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1	NR cell 2 with CCA	NR cell 2 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1	As specified in clause A.3.26.2.1	
UL CCA model		Config 1	As specified in clause A.3.26.2.2	
Gap Pattern Id		Config 1	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	9	
A3-Offset	dB	Config 1	-6	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3µs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	2	

Table A.11.5.2.5.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter		Unit	Test configuration n	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD			
TDD configuration			Config 1	TDDConf.1.1 CCA			
BW _{channel}		MHz	Config 1	40: N _{RB,c} = 106			
BWP BW		MHz	Config 1	40: N _{RB,c} = 106			
BWP configuration	Initial DL BWP	Config 1	Config 1	DLBWP.0.1		NA	
	Initial UL BWP	Config 1		ULBWP.0.1		NA	
	Dedicated DL BWP	Config 1		DLBWP.1.1		NA	
	Dedicated UL BWP	Config 1		ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.1.1 CCA			
CORESET Reference Channel			Config 1	CR.1.1 CCA			
SSB parameters	Semi-static channel access ^{Note 5,7}		Config 1	SSB.1 CCA		SSB.1 CCA	
	Semi-static channel access ^{Note 5,7}		Config 1	SSB.2 CCA		SSB.2 CCA	

DBT window configuration			Config 1	As defined in A.3.28.1		As defined in A.3.28.1	
SMTC configuration defined in A.3.11			Config 1	SMTC.1		SMTC.4	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1	$P_{CCA_DL}=0.9375$		$P_{CCA_DL}=0.9375$	
	Dynamic channel access Note 6,7		Config 1	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1	$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
	Dynamic channel access Note 6,7		Config 1	$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
L_{CCA_DL}			Config 1	5		5	
W_{CCA_DL}		ms	Config 1	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	30			
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2	dBm/15 kHz	Config 1	-98		-98		
N_{oc} Note2	dBm/S CS	Config 1	-95		-95		
SS-RSRP Note 3		dBm/S CS	Config 1	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1	4	4	-Infinity	7
I_o Note3		dBm/9.36MHz	Config 1	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

A.11.5.2.5.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_with_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is required to report SSB time index.

$T_{\text{identify_inter_cca_with_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}} + T_{\text{SSB_time_index_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_time_index_inter_cca}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.2.6 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is used

A.11.5.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are two cells: NR cell 1 as PCell in FR1 with CCA on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 with CCA on NR RF channel 2. The test parameters are given in Tables A.11.5.2.6.1-1, A.11.5.2.6.1-2 and A.11.5.2.6.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.11.5.2.6.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500 ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.11.5.2.6.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.2.6.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR1 NR carrier frequencies are used. Channels 1 and 2 are with CCA.
Active cells		Config 1	NR cell 1 with CCA (PCell)		NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1	NR cell 2 with CCA		NR cell 2 is on NR RF channel number 2 with CCA.
DL CCA model		Config 1	As specified in clause A.3.26.2.1		
UL CCA model		Config 1	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	9		
A3-Offset	dB	Config 1	-6		
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	DRX.1	DRX.2	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3μs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	3	20	

Table A.11.5.2.6.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2

NR RF Channel Number			Config 1	1	2
Duplex mode			Config 1	TDD	
TDD configuration			Config 1	TDDConf.1.1 CCA	
BW _{channel}		MHz	Config 1	40: N _{RB,c} = 106	
BWP BW		MHz	Config 1	40: N _{RB,c} = 106	
BWP configuration	Initial DL BWP	Config 1	Config 1	DLBWP.0.1	NA
	Initial UL BWP	Config 1		ULBWP.0.1	NA
	Dedicated DL BWP	Config 1		DLBWP.1.1	NA
	Dedicated UL BWP	Config 1		ULBWP.1.1	NA
TRS configuration			Config 1	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 CCA	
SSB parameters	Semi-static channel access Note 5,7		Config 1	SSB.1 CCA	SSB.1 CCA
	Semi-static channel access Note 5,7		Config 1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1	As defined in A.3.28.1	As defined in A.3.28.1
SMTC configuration defined in A.3.11			Config 1	SMTC.1	SMTC.4
DL CCA probability P _{CCA_DL}	Semi-static channel access Note 5,7		Config 1	P _{CCA_DL} =0.9375	P _{CCA_DL} =0.9375
	Dynamic channel access Note 6,7		Config 1	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75
UL CCA probability P _{CCA_UL}	Semi-static channel access Note 5,7		Config 1	P _{CCA_UL} =1	P _{CCA_UL} =1
	Dynamic channel access Note 6,7		Config 1	P _{CCA_UL} =1	P _{CCA_UL} =1
L _{CCA_DL}			Config 1	2	2
W _{CCA_DL}		ms	Config 1	T _{PSS/SSS_sync_inter_cca}	T _{PSS/SSS_sync_inter_cca}
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	30	
EPRE ratio of PSS to SSS			Config 1	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					

EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15 kHz	Config 1	-98		-98	
N_{oc}^{Note2}	dBm/S CS	Config 1	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1	4	4	-Infinity	7
I_o^{Note3}	dBm/9.36MHz	Config 1	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.						
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.						

Table A.11.5.2.6.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Value		Comment
	Test 1	Test 2	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.11.5.2.6.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.11.5.2.6.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_with_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_with_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2, UE is required to report SSB time index.

$T_{\text{identify_inter_cca_with_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}} + T_{\text{SSB_time_index_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_time_index_inter_cca}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

For test 1, DRX cycle = 40 ms and for test 2, DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TTI}_{\text{DCH}}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of

A.11.5.2.7 Event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

A.11.5.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements for NR cell with CCA in clause 9.3A.4 and 9.3A.5.

In this test, there are two cells: NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.11.5.2.7.1-1, A.11.5.2.7.1-2 and A.11.5.2.7.1-3.

In this test, measurement gap pattern configuration # 0 as defined in Table A.11.5.2.7.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.11.5.2.7.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

	NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
	NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.2.7.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies are used. NR channel 1 is with CCA.
Active cell		Config 1,2,3	NR cell 1 (PCell)	NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3	NR cell 2	NR cell 2 is on NR RF channel number 2.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1	
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2	
Gap Pattern Id		Config 1,2,3	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 1,2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1.7	

Table A.11.5.2.7.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number		Config 1,2,3	1		2	
Duplex mode		Config 1	TDD		FDD	
		Config 2,3	TDD		TDD	
TDD configuration		Config 1	TDDConf.1.1 CCA		Not Applicable	
		Config 2	TDDConf.1.1 CCA		TDDConf.1.1	
		Config 3	TDDConf.1.1 CCA		TDDConf.2.1	
BW _{channel}	MHz	Config 1,2	40: N _{RB,c} = 106		10: N _{RB,c} = 52	
		Config 3	40: N _{RB,c} = 106		40: N _{RB,c} = 106	
BWP BW	MHz	Config 1,2	40: N _{RB,c} = 106		10: N _{RB,c} = 52	

			Config 3	40: $N_{RB,c} = 106$	40: $N_{RB,c} = 106$
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1	NA
	Initial UL BWP			ULBWP.0.1	NA
	Dedicated DL BWP			DLBWP.1.1	NA
	Dedicated UL BWP			ULBWP.1.1	NA
TRS configuration			Config 1,2,3	TRS.1.2 TDD	NA
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1
PDSCH Reference measurement channel			Config 1,2,3	SR.1.1 CCA	
CORESET Reference Channel			Config 1,2,3	CR.1.1 CCA	
SSB parameters	Semi-static channel access ^{Note 5,7}		Config 1,2	SSB.1 CCA	SSB.1 FR1
			Config 3	SSB.1 CCA	SSB.2 FR1
	Semi-static channel access ^{Note 5,7}		Config 1,2	SSB.2 CCA	SSB.1 FR1
			Config 3	SSB.2 CCA	SSB.2 FR1
DBT window configuration			Config 1,2,3	As defined in A.3.28.1	Not applicable
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1	SMTC.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	30	15
			Config 3	30	30
DL CCA probability P_{CCA_DL}	Semi-static channel access ^{Note 5,7}		Config 1,2,3	$P_{CCA_DL}=0.9375$	NA
	Dynamic channel access ^{Note 6,7}		Config 1,2,3	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	NA
UL CCA probability P_{CCA_UL}	Semi-static channel access ^{Note 5,7}		Config 1,2,3	$P_{CCA_UL}=1$	NA
	Dynamic channel access ^{Note 6,7}		Config 1,2,3	$P_{CCA_UL}=1$	NA
L_{CCA_DL}			Config 1,2,3	12	12
W_{CCA_DL}		ms	Config 1,2,3	$T_{PSS/SSS_sync_inter_cca}$	$T_{PSS/SSS_sync_inter_cca}$
EPRE ratio of PSS to SSS			Config 1,2,3	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} ^{Note2}		dBm/1 kHz	Config 1,2,3	--98	-98

$\hat{N}_{oc}$ ^{Note2}	dBm/S CS	Config 1,2	-95		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-91	-91	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
I_o ^{Note3}	dBm/9 .36MHz Z	Config 1,2	-58.49	-58.49	-70.05	-62.26
	dBm/3 8.16M Hz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.						

A.11.5.2.7.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_without_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index.

$T_{\text{identify_inter_cca_without_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.2.8 Event triggered reporting tests for FR1 without SSB time index detection when DRX is used

A.11.5.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are two cells: NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.11.5.2.8.1-1, A.11.5.2.8.1-2 and A.11.5.2.8.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.11.5.2.8.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.11.5.2.8.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.2.8.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies are used. NR channel 1 is with CCA.
Active cell		Config 1,2,3	NR cell 1 (PCell)		NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3	NR cell 2		NR cell 2 is on NR RF channel number 2.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2,3	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9		
A3-Offset	dB	Config 1,2,3	-6		

Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.1	DRX.2	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,2,3	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 1,2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	2.5	17	

Table A.11.5.2.8.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	TDD		FDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	TDDConf.1.1 CCA		Not Applicable	
			Config 2	TDDConf.1.1 CCA		TDDConf.1.1	
			Config 3	TDDConf.1.1 CCA		TDDConf.2.1	
BW _{channel}		MHz	Config 1,2	40: N _{RB,c} = 106		10: N _{RB,c} = 52	
			Config 3	40: N _{RB,c} = 106		40: N _{RB,c} = 106	
BWP BW		MHz	Config 1,2	40: N _{RB,c} = 106		10: N _{RB,c} = 52	
			Config 3	40: N _{RB,c} = 106		40: N _{RB,c} = 106	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,2,3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2,3	SR.1.1 CCA			
CORESET Reference Channel			Config 1,2,3	CR.1.1 CCA			
SSB parameters	Semi-static channel access ^{Note 5,7}		Config 1,2	SSB.1 CCA		SSB.1 FR1	
			Config 3	SSB.1 CCA		SSB.2 FR1	
	Semi-static channel access ^{Note 5,7}		Config 1,2	SSB.2 CCA		SSB.1 FR1	
			Config 3	SSB.2 CCA		SSB.2 FR1	
DBT window configuration			Config 1,2,3	As defined in A.3.28.1		Not applicable	
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	30		15	
			Config 3	30		30	
DL CCA probability P _{CCA_DL}	Semi-static channel access ^{Note 5,7}		Config 1,2,3	P _{CCA_DL} =0.9375		NA	

	Dynamic channel access Note 6,7		Config 1,2,3	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75		NA	
UL CCA probability P _{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	P _{CCA_UL} =1		NA	
	Dynamic channel access Note 6,7		Config 1,2,3	P _{CCA_UL} =1		NA	
L _{CCA_DL}			Config 1,2,3	5		5	
W _{CCA_DL}		ms	Config 1,2,3	T _{PSS/SSS_sync_inter_cca}		T _{PSS/SSS_sync_inter_cca}	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N _{oc} Note2		dBm/15kHz	Config 1,2,3	-98		-98	
N _{oc} Note2		dBm/S CS	Config 1,2	-95		-98	
			Config 3	-95		-95	
SS-RSRP Note 3		dBm/S CS	Config 1,2	-91	-91	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{\alpha}$		dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1,2,3	4	4	-Infinity	7
I ₀ Note3		dBm/9.36MHz	Config 1,2	-58.49	-58.49	-70.05	-62.26
		dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2,3	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

Table A.11.5.2.8.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Value		Comment
	Test 1	Test 2	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.11.5.2.8.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.11.5.2.8.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_without_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_without_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2, the UE is not required to report SSB time index.

$T_{\text{identify_inter_cca_without_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

For test 1, DRX cycle = 40 ms and for test 2, DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.2.9 Event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

A.11.5.2.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are two cells: NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.11.5.2.9.1-1, A.11.5.2.9.1-2 and A.11.5.2.9.1-3.

In this test, measurement gap pattern configuration # 0 as defined in Table A.11.5.2.9.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.11.5.2.9.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.2.9.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1, 2	Two FR1 NR carrier frequencies are used. NR channel 1 is with CCA.
Active cell		Config 1,2,3	NR cell 1 (PCell)	NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3	NR cell 2	NR cell 2 is on NR RF channel number 2.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1	

UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2	
Gap Pattern Id		Config 1,2,3	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 1,2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	2	

Table A.11.5.2.9.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	TDD		FDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	TDDConf.1.1 CCA		Not Applicable	
			Config 2	TDDConf.1.1 CCA		TDDConf.1.1	
			Config 3	TDDConf.1.1 CCA		TDDConf.2.1	
BW _{channel}		MHz	Config 1,2	40: N _{RB,c} = 106		10: N _{RB,c} = 52	
			Config 3	40: N _{RB,c} = 106		40: N _{RB,c} = 106	
BWP BW		MHz	Config 1,2	40: N _{RB,c} = 106		10: N _{RB,c} = 52	
			Config 3	40: N _{RB,c} = 106		40: N _{RB,c} = 106	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,2,3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2,3	SR.1.1 CCA			
CORESET Reference Channel			Config 1,2,3	CR.1.1 CCA			
SSB parameters	Semi-static channel access ^{Note 5,7}		Config 1,2	SSB.1 CCA		SSB.1 FR1	
			Config 3	SSB.1 CCA		SSB.2 FR1	
	Semi-static channel access ^{Note 5,7}		Config 1,2	SSB.2 CCA		SSB.1 FR1	
			Config 3	SSB.2 CCA		SSB.2 FR1	
DBT window configuration			Config 1,2,3	As defined in A.3.28.1		Not applicable	

SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	30		15	
			Config 3	30		30	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	$P_{CCA_DL}=0.9375$		NA	
	Dynamic channel access Note 6,7		Config 1,2,3	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		NA	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	$P_{CCA_UL}=1$		NA	
	Dynamic channel access Note 6,7		Config 1,2,3	$P_{CCA_UL}=1$		NA	
L_{CCA_DL}			Config 1,2,3	5		5	
W_{CCA_DL}		ms	Config 1,2,3	$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} Note2		dBm/15kHz	Config 1,2,3	-98		-98	
N_{oc} Note2		dBm/S CS	Config 1,2	-95		-98	
			Config 3	-95		-95	
SS-RSRP Note 3		dBm/S CS	Config 1,2	-91	-91	-Infinity	-91
			Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$		dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$		dB	Config 1,2,3	4	4	-Infinity	7
I_o Note3		dBm/9.36MHz	Config 1,2	-58.49	-58.49	-70.05	-62.26
		dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition			Config 1,2,3	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 6:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 7:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.

A.11.5.2.9.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_with_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is required to report SSB time index.

$T_{\text{identify_inter_cca_with_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}} + T_{\text{SSB_time_index_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_time_index_inter_cca}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.2.10 Event triggered reporting tests for FR1 with SSB time index detection when DRX is used

A.11.5.2.10.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are two cells: NR cell 1 with CCA as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.11.5.2.10.1-1, A.11.5.2.10.1-2 and A.11.5.2.10.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.11.5.2.10.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500 ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.11.5.2.10.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.2.10.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2		Two FR1 NR carrier frequencies are used. NR channel 1 is with CCA.
Active cell		Config 1,2,3	NR cell 1 (PCell)		NR cell 1 is on NR RF channel number 1 with CCA.
Neighbour cell		Config 1,2,3	NR cell 2		NR cell 2 is on NR RF channel number 2.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2,3	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.1	DRX.2	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,2,3	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 1,2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	3	20	

Table A.11.5.2.10.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1	TDD		FDD	
			Config 2,3	TDD		TDD	
TDD configuration			Config 1	TDDConf.1.1 CCA		Not Applicable	
			Config 2	TDDConf.1.1 CCA		TDDConf.1.1	
			Config 3	TDDConf.1.1 CCA		TDDConf.2.1	
BW _{channel}		MHz	Config 1,2	40: N _{RB,c} = 106		10: N _{RB,c} = 52	
			Config 3	40: N _{RB,c} = 106		40: N _{RB,c} = 106	
BWP BW		MHz	Config 1,2	40: N _{RB,c} = 106		10: N _{RB,c} = 52	
			Config 3	40: N _{RB,c} = 106		40: N _{RB,c} = 106	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,2,3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2,3	SR.1.1 CCA			
CORESET Reference Channel			Config 1,2,3	CR.1.1 CCA			
SSB parameters	Semi-static channel access ^{Note 5,7}		Config 1,2	SSB.1 CCA		SSB.1 FR1	
			Config 3	SSB.1 CCA		SSB.2 FR1	
	Semi-static channel access ^{Note 5,7}		Config 1,2	SSB.2 CCA		SSB.1 FR1	
			Config 3	SSB.2 CCA		SSB.2 FR1	
DBT window configuration			Config 1,2,3	As defined in A.3.28.1		Not applicable	
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	30		15	
			Config 3	30		30	
DL CCA probability P _{CCA_DL}	Semi-static channel access ^{Note 5,7}		Config 1,2,3	P _{CCA_DL} =0.9375		NA	
	Dynamic channel access ^{Note 6,7}		Config 1,2,3	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75		NA	
UL CCA probability P _{CCA_UL}	Semi-static channel access ^{Note 5,7}		Config 1,2,3	P _{CCA_UL} =1		NA	
	Dynamic channel access ^{Note 6,7}		Config 1,2,3	P _{CCA_UL} =1		NA	
L _{CCA_DL}			Config 1,2,3	2		2	
W _{CCA_DL}		ms	Config 1,2,3	T _{PSS/SSS_sync_inter_cca}		T _{PSS/SSS_sync_inter_cca}	
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	

EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15kHz	Config 1,2,3	-98		-98	
N_{oc}^{Note2}	dBm/S CS	Config 1,2	-95		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-91	-91	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7
I_o^{Note3}	dBm/9.36MHz	Config 1,2	-58.49	-58.49	-70.05	-62.26
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. . For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.						
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.						

Table A.11.5.2.10.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Value		Comment
	Test 1	Test 2	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	

shortDRX	disable	disable	
----------	---------	---------	--

Table A.11.5.2.10.1-5: TimeAlignmentTimer -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.11.5.2.10.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_with_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_with_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2, the UE is required to report SSB time index.

$T_{\text{identify_inter_cca_with_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}} + T_{\text{SSB_time_index_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_time_index_inter_cca}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

For test 1, DRX cycle = 40 ms and for test 2, DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TTI}_{\text{DCCH}}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.3 Inter-RAT E-UTRAN measurements

A.11.5.3.1 SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1

A.11.5.3.1.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1. This test shall partly verify the cell search and measurement requirements in Clauses 9.4.2 and 9.4.3.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell on a frequency carrier with CCA and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter

RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

Supported test configurations are shown in table A.11.5.3.1.1-1. General test parameters are provided in Table A.11.5.3.1.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.11.5.3.1.1-3 and A.11.5.3.1.1-4, respectively.

Table A.11.5.3.1.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Configuration	Description
1	NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
2	NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.3.1.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		1	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.11.5.3.1.1-2 and A.11.5.3.1.1-3.	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 2
Gap Pattern Id		0	As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	5	
Note 1: Values are defined in Table A.11.5.3.1.1-3			

Table A.11.5.3.1.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
NR RF Channel Number		1, 2	1	
TDD configuration		1, 2	TDDConf.1.1 CCA	
BW _{channel}	MHz	1, 2	40: N _{RB,C} = 106	
P _{CCA_DL} for dynamic channel access ^{Note 6,8}		1, 2	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75	
P _{CCA_DL} for semi-static channel access ^{Note 7,8}		1, 2	P _{CCA_DL} =0.9375	

OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1	
SMTc configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTc.1	
DBT window configuration		1, 2	DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	
b2-Threshold1	dBm	1	-96	
		2	-93	
		1, 2	0	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note2}	dBm/15kHz	1, 2	-106	
N_{oc} ^{Note2}	dBm/SCS	1, 2	-103	
SS-RSRP ^{Note 3,5}	dBm/SCS	1, 2	-85	-105
$\hat{E}_s/I_{ot}$ ^{Note 5}	dB	1, 2	18	-2
$\hat{E}_s/N_{oc}$ ^{Note 5}	dB	1, 2	18	-2
I_o ^{Note3}	dBm/38.16MHz	1, 2	-53.88	-69.82
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix		1, 2	1x2 Low	
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.				
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
NOTE 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.				
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.5.3.1.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1,2	1	

Duplex mode		1	FDD
		2	TDD
TDD special subframe configuration ^{Note1}		2	6
TDD uplink-downlink configuration ^{Note1}		2	1
BW _{channel}	MHz	1,2	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD
OCNG Patterns ^{Note2}		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
PBCH_RA	dB	1, 2	0
PBCH_RB			
PSS_RA			
SSS_RA			
PCFICH_RB			
PHICH_RA			
PHICH_RB			
PDCCH_RA			
PDCCH_RB			
PDSCH_RA			
PDSCH_RB			
OCNG_RA ^{Note3}			
OCNG_RB ^{Note3}			
N _{oc} ^{Note4}	dBm/15kHz	1, 2	-104
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity
$\hat{E}_s/I_{ot}$ ^{Note5}	dB	1, 2	-Infinity
RSRP ^{Note5}	dBm/15kHz	1, 2	-Infinity
SCH_RP ^{Note5}	dBm/15kHz	1, 2	-Infinity
I _o ^{Note5}	dBm/9MHz	1, 2	-73.21+10log (N _{RB,c} /50)
Propagation Condition		1, 2	AWGN
Antenna Configuration and Correlation Matrix		1, 2	1x2
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23]. Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively. Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.11.5.3.1.2 Test Requirements

The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.11.5.3.2 SA NR - E-UTRAN event-triggered reporting in DRX in FR1

A.11.5.3.2.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1 when DRX is used. This test shall partly verify the cell search and measurement requirements in Clauses 9.4.2 and 9.4.3. There are two test cases. In test 1 the UE shall be configured with DRX cycle of 40 ms. In test 2 the UE shall be configured with DRX cycle of 640 ms.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell with CCA and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

In each test the UE shall be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, the UE shall be allocated with PUSCH resource at every DRX cycle.

Supported test configurations are shown in table A.11.5.3.2.1-1. General test parameters are provided in Table A.11.5.3.2.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.11.5.3.2.1-3 and A.11.5.3.2.1-4, respectively.

Table A.11.5.3.2.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Configuration	Description
1	NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE FDD
2	NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.5.3.2.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Test 1	Test 2	Comment
		Value		
NR RF Channel Number		1		1 NR carrier frequency is used in the test
LTE RF Channel Number		2		1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.11.5.3.2.1-2 and A.11.5.3.2.1-3.		
Active cell		Cell 1		Cell 1 is on RF channel number 1
Neighbour cell		Cell 2		Cell 2 is on RF channel number 2
Gap Pattern Id		0		As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP		Measurement quantity for Cell 1

Inter-RAT E-UTRAN measurement quantity		RSRP		Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95		E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0		
TimeToTrigger	s	0		
Filter coefficient		0		L3 filtering is not used
DRX		DRX.1	DRX.7	DRX cycle configurations DRX.1 and DRX.7 are defined in Table A.3.3.1-1 and Table A.3.3.7-1 respectively.
T1	s	5		
T2	s	5	15	
Note 1: Values are defined in Table A.11.5.3.2.1-3				

Table A.11.5.3.2.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
NR RF Channel Number		1, 2	1	
TDD configuration		1, 2	TDDConf.1.1 CCA	
BW_{channel}	MHz	1, 2	40: $N_{RB,C} = 106$	
$P_{\text{CCA_DL}}$ for dynamic channel access Note 6,8		1, 2	$P_{\text{CCA_DL_1}}=0.75$ $P_{\text{CCA_DL_2}}=0.75$	
$P_{\text{CCA_DL}}$ for semi-static channel access Note 7,8		1, 2	$P_{\text{CCA_DL}}=0.9375$	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1	
DBT window configuration		1, 2	DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	
b2-Threshold1	dBm	1	-96	
		2	-93	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note 2	dBm/15kHz	1, 2	-106	
N_{oc} Note 2	dBm/SCS	1, 2	-103	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-85	-105
$\hat{E}_s/I_{\text{ot}}$ Note 5	dB	1, 2	18	-2
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	18	-2

IoNote3	dBm/38.16MHz z	1, 2	-53.88	-69.82
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix		1, 2	1x2 Low	
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.				
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
NOTE 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.				
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.5.3.2.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1,2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration ^{Note1}		2	6	
TDD uplink-downlink configuration ^{Note1}		2	1	
BW _{channel}	MHz	1,2	5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				

SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	17
$\hat{E}_s/I_{ot}$ ^{Note5}	dB	1, 2	-Infinity	17
RSRP ^{Note5}	dBm/15kHz	1, 2	-Infinity	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2	-Infinity	-87
I _o ^{Note5}	dBm/9MHz	1, 2	-73.21+10log (N _{RB,c} /50)	-56.12+10log (N _{RB,c} /50)
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix		1, 2	1x2	
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].			
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.			
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 5:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.11.5.3.2.2 Test Requirements

In test 1, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

In test 2, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 12.8s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

A.11.5.4 L1-RSRP measurements for beam reporting

A.11.5.4.1 SSB based L1-RSRP measurement when DRX is not used

A.11.5.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.11.5.4.1.1-1.

Table A.11.5.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
--------	-------------

1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations

A.11.5.4.1.2 Test parameters

There is one cell in the test, the FR1 PCell (Cell 1). Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test parameters for the Cell 1 are given in Table A.11.5.4.1.2-1 and Table A.11.5.4.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.11.5.4.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
DL CCA model	1		As specified in A.3.20.2.1
UL CCA model	1		As specified in A.3.20.2.2
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.1.1 CCA
BW _{channel}	1	MHz	40: N _{RB,c} = 106
PDSCH Reference measurement channel	1		SR.1.1 CCA
RMSI CORESET Reference Channel	1		CR.1.1 CCA
Dedicated CORESET Reference Channel	1		CCR.1.1 CCA
SSB configuration	1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1		DBT.1
TRS Configuration	1		TRS.1.2 TDD
DRX configuration	1		Off
reportConfigType	1		periodic
reportQuantity	1		ssb-Index-RSRP
Number of reported RS	1		2
L1-RSRP reporting period	1	slot	80
T1	1	s	5
T2	1	s	1
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			

EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1		AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table A.11.5.4.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} ^{Note 4,6}	1		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} ^{Note 4,7}	1		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1		1.0	1.0	1.0	1.0
N_{oc} ^{Note2}	1	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1	dBm/SSB SCS	-91.65			
$\hat{E}_s/I_{ot}$	1	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s/N_{oc}$	1	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.						
Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.						
Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						

Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2} .

A.11.5.4.1.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.4.2 SSB based L1-RSRP measurement when DRX is used

A.11.5.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.11.5.4.2.1-1.

Table A.11.5.4.2.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.11.5.4.2.2 Test parameters

There is one cell in the test, the FR1 PCell (Cell 1). Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test parameters for the Cell 1 are given in Table A.11.5.4.2.2-1 and Table A.11.5.4.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.11.5.4.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
DL CCA model	1		As specified in A.3.20.2.1
UL CCA model	1		As specified in A.3.20.2.2
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.1.1 CCA
$BW_{channel}$	1	MHz	40: $N_{RB,c} = 106$

PDSCH Reference measurement channel	1		SR.1.1 CCA
RMSI CORESET Reference Channel	1		CR.1.1 CCA
Dedicated CORESET Reference Channel	1		CCR.1.1 CCA
SSB configuration	1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1		DBT.1
TRS Configuration	1		TRS.1.2 TDD
DRX configuration	1		DRX.3
reportConfigType	1		periodic
reportQuantity	1		ssb-Index-RSRP
Number of reported RS	1		2
L1-RSRP reporting period	1	slot	80
T1	1	s	5
T2	1	s	1
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1		AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table A.11.5.4.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} ^{Note 4,6}	1		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} ^{Note 4.7}	1		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75

UL CCA probability P_{CCA_UL}	1		1.0	1.0	1.0	1.0
N_{oc} ^{Note2}	1	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1	dBm/SSB SCS	-91.65			
$\hat{E}_s/I_{ot}$	1	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s/N_{oc}$	1	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy. Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows. Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.						

A.11.5.4.2.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.4.3 SSB based L1-RSRP measurement on SCC when DRX is not used

A.11.5.4.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.11.5.4.3.1-1.

Table A.11.5.4.3.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.11.5.4.3.2 Test parameters

There are two cells in the test, the FR1 PCell (Cell 1) and FR1 SCell (Cell 2). Both Cell 1 and Cell 2 operate on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test parameters for the Cell 1 are given in Table A.11.5.4.3.2-1 and Table A.11.5.4.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.11.5.4.3.2-1: General test parameters

Parameter	Config	Unit	Value
Active PCell	1		Cell 1
Active SCell	1		Cell 2
RF Channel Number	1		1: Cell 1 2: Cell 2
DL CCA model	1		As specified in A.3.20.2.1
UL CCA model	1		As specified in A.3.20.2.2
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.1.1 CCA
BW _{channel}	1	MHz	40: N _{RB,C} = 106
PDSCH Reference measurement channel	1		SR.1.1 CCA
RMSI CORESET Reference Channel	1		CR.1.1 CCA
Dedicated CORESET Reference Channel	1		CCR.1.1 CCA
SSB configuration	1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1		DBT.1
TRS Configuration	1		TRS.1.2 TDD
DRX configuration	1		Off
reportConfigType	1		periodic
reportQuantity	1		ssb-Index-RSRP
Number of reported RS	1		2
L1-RSRP reporting period	1	slot	80
T1	1	s	5
T2	1	s	1
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			

EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1		AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table A.11.5.4.3.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} ^{Note 4,6}	1		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} ^{Note 4,7}	1		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1		1.0	1.0	1.0	1.0
N_{oc} ^{Note2}	1	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1	dBm/SSB SCS	-91.65			
$\hat{E}_s/I_{ot}$	1	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s/N_{oc}$	1	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.						
Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.						
Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						

Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2} .

A.11.5.4.3.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.11.5.4.4 SSB based L1-RSRP measurement on SCC when DRX is used

A.11.5.4.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.11.5.4.4.1-1.

Table A.11.5.4.4.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.11.5.4.4.2 Test parameters

There are two cells in the test, the FR1 PCell (Cell 1) and FR1 SCell (Cell 2). Both Cell 1 and Cell 2 operate on a carrier frequency with CCA and transmits SSBs in DBT windows according to DL CCA model. The test parameters for the Cell 1 are given in Table A.11.5.4.4.2-1 and Table A.11.5.4.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.11.5.4.4.2-1: General test parameters

Parameter	Config	Unit	Value
Active PCell	1		Cell 1
Active SCell	1		Cell 2
RF Channel Number	1		1: Cell 1 2: Cell 2
DL CCA model	1		As specified in A.3.20.2.1

UL CCA model	1		As specified in A.3.20.2.2
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.1.1 CCA
BW _{channel}	1	MHz	40: N _{RB,C} = 106
PDSCH Reference measurement channel	1		SR.1.1 CCA
RMSI CORESET Reference Channel	1		CR.1.1 CCA
Dedicated CORESET Reference Channel	1		CCR.1.1 CCA
SSB configuration	1		SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
DBT Window Configuration	1		DBT.1
TRS Configuration	1		TRS.1.2 TDD
DRX configuration	1		DRX.3
reportConfigType	1		periodic
reportQuantity	1		ssb-Index-RSRP
Number of reported RS	1		2
L1-RSRP reporting period	1	slot	80
T1	1	s	5
T2	1	s	1
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1		AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.			

Table A.11.5.4.4.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2

DL CCA Probability P_{CCA_DL} Note 4.6	1		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4.7	1		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1		1.0	1.0	1.0	1.0
N_{oc} Note2	1	dBm/15kHz	-94.65			
N_{oc} Note2	1	dBm/SSB SCS	-91.65			
$\hat{E}_s / I_{ot}$	1	dB	0	0	-Infinity	3
SSB RSRP Note3	1	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
I_o Note3	1	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s / N_{oc}$	1	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy. Note 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows. Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.						

A.11.5.4.4.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCC}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCC.

A.11.6 Measurement performance

A.11.6.1 SS-RSRP

A.11.6.1.1 Intra-frequency measurement accuracy on a carrier frequency with CCA

A.11.6.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy on the carrier frequency with CCA is within the specified limits. This test will verify the requirements in clauses 10.1.36.1.1 and 10.1.36.1.2 for intra-frequency measurements under CCA.

A.11.6.1.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model. Supported test configurations are shown in table A.11.6.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.11.6.1.1.2-2. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell.

Table A.11.6.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Config	Description
1	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.6.1.1.2-2: SS-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
TDD configuration	Config 1		TDDConf.1.1 CCA					
BW _{channel}	Config 1	MHz	40: N _{RB,C} = 106					
BWP BW	Config 1		40: N _{RB,C} = 106					
DL CCA model			As specified in clause A.3.26.2.1					
UL CCA model			As specified in clause A.3.26.2.2					
P _{CCA_DL} for dynamic channel access ^{Note 7,9}			P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75					
P _{CCA_DL} for semi-static channel access ^{Note 8,9}			P _{CCA_DL} =0.9375					
P _{CCA_UL}			1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1		TRS.1. 2 TDD	NA	TRS.1 .2 TDD	NA	TRS.1. 2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA	-	SR.1.1 CCA	-	SR.1.1 CCA	-
RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
Control channel RMC	Config 1		CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
SSB configuration for semi-static channel access	Config 1		SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA

SSB configuration for dynamic channel access			Config 1		SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3		DBT.1	DBT.1	DBT.1	DBT.1	DBT.1	DBT.1
Time offset with Cell 1			Config 1	μs	-	3	-	3	-	3
SMTC configuration			Config 1		SMTC.1					
OCNG Patterns					OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing		Config 1	kHz	30 kHz						
EPRE ratio of PSS to SSS				dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS										
EPRE ratio of PBCH to PBCH DMRS										
EPRE ratio of PDCCH DMRS to SSS										
EPRE ratio of PDCCH to PDCCH DMRS										
EPRE ratio of PDSCH DMRS to SSS										
EPRE ratio of PDSCH to PDSCH										
EPRE ratio of OCNG DMRS to SSS(Note 1)										
EPRE ratio of OCNG to OCNG DMRS (Note 1)										
N_{oc} ^{Note2}	Config 1	NR_CCA_FR1_I		Not applicable ^{Note 5}		-94	-110			
		NR_CCA_FR1_J					-109.5			
N_{oc} ^{Note2}	Config 1	NR_CCA_FR1_I	dBm/SCS	Not applicable ^{Note 5}		-91	-107.0			
		NR_CCA_FR1_J					-106.5			
$\hat{E}_s/I_{ot}$ ^{Note6}			dB	2.46	-5.97	2.46	-5.97	-2.01	-3.54	
$\hat{E}_s/N_{oc}$ ^{Note6}			dB	6	1	6	1	1	0	
SS-RSRP ^{Not e3,6}	Config 1	NR_CCA_FR1_I	dBm/SCS	Not applicable ^{Note 5}	Not applicable ^{Note 5}	-85	-90	-	-	
		NR_CCA_FR1_J						106.00	107.00	
								-	-	
								105.50	106.50	
I_o ^{Note3}	Config 1	NR_CCA_FR1_I	dBm/38.16MHz	Not applicable ^{Note 5}		-51.99	-70.82			
		NR_CCA_FR1_J					-70.32			
Propagation condition				-	AWGN					
Antenna configuration					1x2					
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.										
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.										
NOTE 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.										
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.										
NOTE 5: Subtest 1 is not used when testing with 30kHz SSB SCS.										
NOTE 6: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.										
NOTE 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.										
NOTE 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.										
NOTE 9: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.										

A.11.6.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for cell 1 and cell 2 shall fulfil absolute requirement in clause 10.1.36.1.1 and relative requirement in clause 10.1.36.1.2.

A.11.6.1.2 Intra-frequency measurement accuracy on SCC on a carrier frequency with CCA

A.11.6.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy on the carrier frequency with CCA is within the specified limits. This test will verify the requirements in clauses 10.1.36.1.1 and 10.1.36.1.2 for intra-frequency measurements under CCA.

A.11.6.1.2.2 Test parameters

Three cells are deployed in the test, which are FR1 PCell (Cell 1) on the carrier frequency with CCA, and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). Supported test configurations are shown in table A.11.6.1.2.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.11.6.1.2.2-2.

Table A.11.6.1.2.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Config	Description
1	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode

Table A.11.6.1.2.2-2: SS-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
TDD configuration	Config 1		TDDConf.1.1 CCA					
BW _{channel}	Config 1	MHz	40: N _{RB,c} = 106					
BWP BW	Config 1		40: N _{RB,c} = 106					
DL CCA model			As specified in clause A.3.26.2.1					
UL CCA model			As specified in clause A.3.26.2.2					
P _{CCA_DL} for dynamic channel access ^{Note 7,9}			P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75					
P _{CCA_DL} for semi-static channel access ^{Note 8,9}			P _{CCA_DL} =0.9375					
P _{CCA_UL}			1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1		TRS.1. 2 TDD	NA	TRS.1 .2 TDD	NA	TRS.1. 2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA	-	SR.1.1 CCA	-	SR.1.1 CCA	-
RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
Control channel RMC	Config 1		CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
SSB configuration for semi-static channel access	Config 1		SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA
SSB configuration for dynamic channel access	Config 1		SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA

DBT window configuration		Config 1,2,3		DBT.1	DBT.1	DBT.1	DBT.1	DBT.1	DBT.1
Time offset with Cell 1		Config 1	μs	-	3	-	3	-	3
SMTC configuration		Config 1		SMTC.1					
OCNG Patterns				OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing		Config 1	kHz	30 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} ^{Note2}	Config 1	NR_CCA_FR1_I		Not applicable ^{Note 5}		-94		-110	
		NR_CCA_FR1_J						-109.5	
N_{oc} ^{Note2}	Config 1	NR_CCA_FR1_I	dBm/SCS	Not applicable ^{Note 5}		-91		-107.0	
		NR_CCA_FR1_J						-106.5	
$\hat{E}_s/I_{ot}$ ^{Note6}			dB	2.46	-5.97	2.46	-5.97	-2.01	-3.54
$\hat{E}_s/N_{oc}$ ^{Note6}			dB	6	1	6	1	1	0
SS-RSRP ^{Not e3}	Config 1	NR_CCA_FR1_I	dBm/SCS	Not applica ^{ble} ^{Note 5}	Not applic ^{able} ^{Not e 5}	-85	-90	-	-
		NR_CCA_FR1_J						106.00	107.00
I_o ^{Note3}	Config 1	NR_CCA_FR1_I	dBm/38.16MHz	Not applicable ^{Note 5}		-51.99		-	-
		NR_CCA_FR1_J						-70.82	-70.32
Propagation condition			-	AWGN					
Antenna configuration				1x2					
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.									
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.									
NOTE 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.									
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.									
NOTE 5: Subtest 1 is not used when testing with 30kHz SSB SCS.									
NOTE 6: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.									
NOTE 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.									
NOTE 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.									
NOTE 9: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.									

A.11.6.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for cell 2 and cell 3 shall fulfil absolute requirement in clause 10.1.36.1.1 and relative requirement in clause 10.1.36.1.2.

A.11.6.2 SS-RSRQ

A.11.6.2.1 Intra-frequency measurement accuracy

A.11.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.29.1.1.

A.11.6.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.11.6.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is tested by using the parameters in Table A.11.6.2.1.2-2. In all test cases, Cell 1 is the PCell with CCA and Cell 2 is the target cell with CCA. Three sub-tests (Test 1, Test 2, and Test 3) are provided different N_{oc} on Cells 1 and 2.

Table A.11.6.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.6.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1			
DL CCA model	Config 1		As specified in clause A.3.26.2.1			
UL CCA model	Config 1		As specified in clause A.3.26.2.2			
DL CCA probability for semi-static channel access ^{Note 7, 8}	P _{CCA_UL}		1.0	-	1.0	-
	P _{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access ^{Note 8, 9}	P _{CCA_DL_1}		0.75	-	0.75	-
	P _{CCA_DL_2}		0.75	-	0.75	-
Duplex mode	Config 1		TDD			
TDD configuration	Config 1		TDDConf.1.1 CCA			
BW _{channel}	Config 1	MHz	40: N _{RB,c} = 106			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA		CR.1.1 CCA	
Control Channel RMC	Config 1		CCR.1.1 CCA		CCR.1.1 CCA	
TRS configuration	Config 1		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OP. 1			
SS-RSSI-Measurement			Not Applicable			
Time offset with Cell 1	Config 1	μs	-	3	-	3
DBT Window Configuration	Config 1		DBT.1 (As defined in A.3.28.1)			
SSB configuration			SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			

SMTC configuration		Config 1		SMTC.1			
PDSCH/PDCCH subcarrier spacing		Config 1	kHz	30kHz			
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}	Config1	NR_CCA_FR1_I	dBm/15kHz	-91		-110	
		NR_CCA_FR1_J				-109.5	
N_{oc}^{Note2}	Config 1	NR_CCA_FR1_I	dBm/SCS	-88		-107	
		NR_CCA_FR1_J				-106.5	
$\hat{E}_s / I_{ot}$			dB	-1.76		-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	3	3	-4	-4
SS-RSRP ^{Note3}	Config 1	NR_CCA_FR1_I	dBm/SCS	-85	-85	-111	-111
		NR_CCA_FR1_J				-110.5	-110.5
SS-RSRQ ^{Note3}		NR_CCA_FR1_I	dB	-14.77	-14.77	-17.34	-17.34
		NR_CCA_FR1_J					
I_o^{Note3}	Config 1	NR_CCA_FR1_I	dBm/ 38.16MHz	-50		-73.4	-73.4
		NR_CCA_FR1_J				-72.9	-72.9
Propagation condition			-	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRQ, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: NR operating band groups are as defined in Clause 3.5.2. Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations. Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 9: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.							

A.11.6.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.29.1.1.

A.11.6.2.2 Inter-frequency measurement accuracy

A.11.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.30.1.1 and 10.1.30.1.2.

A.11.6.2.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.11.6.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.11.6.2.2.2-2. In all test cases, Cell 1 is the PCell with CCA and Cell 2 is target cell with CCA. Three sub-tests (Test 1, Test 2, and Test 3) are provided different N_{oc} on Cells 1 and 2.

Table A.11.6.2.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Config	Description
1	With CCA: NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.6.2.2.2-2: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
DL CCA model	Config 1		As specified in clause A.3.26.2.1					
UL CCA model	Config 1		As specified in clause A.3.26.2.2					
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-	0.75	-
Duplex mode	Config 1		TDD					
TDD configuration	Config 1		TDDConf.1.1 CCA					
$BW_{channel}$	Config 1	MHz	40: $N_{RB,c} = 106$					
Gap pattern ID	Config 1		0					
BWP BW	Config 1		40: $N_{RB,c} = 106$					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 CCA		CCR.1.1 CCA		CCR.1.1 CCA	
TRS Configuration	Config 1		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OCNG pattern 1					
Time offset with Cell 1	Config 1	μs	-	3	-	3	-	3
DBT Window configuration	Config 1		DBT.1					
SSB configuration	Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access					
SMTC configuration	Config 1		SMTC.1					
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30 kHz					

EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} ^{Note2}		NR_CCA_FR1_I	dBm/15kHz	-86.27		-113	-112		
		NR_CCA_FR1_J					-111.5		
N_{oc} ^{Note2}	Config 1	NR_CCA_FR1_I	dBm/SCS	-83.27		-110	-109		
		NR_CCA_FR1_J					-108.5		
$\hat{E}_s/I_{ot}$			dB	-1.75		-1.75	3	-1.75	
$\hat{E}_s/N_{oc}$			dB	-1.75		-1.75	3	-1.75	
SS-RSRP ^{Not e3}	Config 1	NR_CCA_FR1_I		-85.02	-85.02	- 111.75	- 111.75	-106	-
		NR_CCA_FR1_J						-105.5	-110-.25
SS-RSRQ ^{Note3}		NR_CCA_FR1_I	dB	-14.77	-14.77	-40.59	-40.59	12.56	14.76
		NR_CCA_FR1_J							
Io ^{Note3}	Config 1	NR_CCA_FR1_I	dBm/SCS	-50		-76.73	-73.19	-75.73	
		NR_CCA_FR1_J					-72.69	-75.23	
Propagation condition			-	AWG N	AWGN	AWGN	AWGN	AWG N	AWG N
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.									
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.									
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.									
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.									
Note 5: NR operating band groups are as defined in clause 3.5.2.									
Note 6: For UE supporting both semi-static and dynamic cannal access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.									
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.									
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.									
Note 9: For UE supporting both semi-static and dynamic cannal access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.									

A.11.6.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.30.1.1 and 10.1.30.1.2.

A.11.6.2.3 Intra-frequency measurement accuracy on SCC

A.11.6.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.29.1.1.

A.11.6.2.3.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.11.6.2.3.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is tested by using the parameters in Table A.11.6.2.3.2-2. In all test cases, Cell 1 is the PCell with CCA, Cell 2 is the SCell with CCA, and Cell 3 is the target cell with CCA. Three sub-tests (Test 1, Test 2, and Test 3) are provided different N_{oc} on Cells 1, 2, and 3.

Table A.11.6.2.3.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations

Table A.11.6.2.3.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 3	
			Cell 1 / Cell 2	Cell 3	Cell 1 / Cell 2	Cell 3
SSB ARFCN			freq1 for Cell 1 freq2 for Cell 2	freq2	freq1 for Cell 1 freq2 for Cell 2	freq2
DL CCA model	Config 1		As specified in clause A.3.26.2.1			
UL CCA model	Config 1		As specified in clause A.3.26.2.2			
DL CCA probability for semi-static channel access ^{Note 7, 8}	P_{CCA_UL}		1.0	-	1.0	-
	P_{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access ^{Note 8, 9}	$P_{CCA_DL_1}$		0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-
Duplex mode	Config 1		TDD			
TDD configuration	Config 1		TDDConf.1.1 CCA			
$BW_{channel}$	Config 1	MHz	40: $N_{RB,c} = 106$			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA		CR.1.1 CCA	
Control Channel RMC	Config 1		CCR.1.1 CCA		CCR.1.1 CCA	
TRS configuration	Config 1		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OP. 1			
SS-RSSI-Measurement			Not Applicable			
Time offset with Cell 1	Config 1	μ s	-	3	-	3
DBT Window Configuration	Config 1		DBT.1 (As defined in A.3.28.1)			
SSB configuration	Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration	Config 1		SMTC.1			
CSI-RS for tracking	Config 1		TRS.1.2 TDD			
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30kHz			
EPRE ratio of PSS to SSS		dB	0	0	0	0

EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}	Config1	NR_CCA_FR1_I	dBm/15kHz	-91		-110	
		NR_CCA_FR1_J				-109.5	
N_{oc}^{Note2}	Config 1	NR_CCA_FR1_I	dBm/SCS	-88		-107	
		NR_CCA_FR1_J				-106.5	
$\hat{E}_s / I_{ot}$			dB	-1.76		-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	3	3	-4	-4
SS-RSRP ^{Note3}	Config 1	NR_CCA_FR1_I	dBm/SCS	-85	-85	-111	-111
		NR_CCA_FR1_J				-110.5	-110.5
SS-RSRQ ^{Note3}		NR_CCA_FR1_I	dB	-14.77	-14.77	-17.34	-17.34
		NR_CCA_FR1_J					
I_o ^{Note3}	Config 1	NR_CCA_FR1_I	dBm/ 38.16MHz	-50		-73.4	-73.4
		NR_CCA_FR1_J				-72.9	-72.9
Propagation condition			-	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: SS-RSRQ, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 5: NR operating band groups are as defined in Clause 3.5.2.							
Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.							
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.							
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.							
Note 9: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.							

A.11.6.2.3.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.29.1.1.

A.11.6.2.4 Inter-frequency measurement accuracy

A.11.6.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.30.1.1 and 10.1.30.1.2.

A.11.6.2.4.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.11.6.2.4.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.11.6.2.4.2-2 and A.11.6.2.4.2-3. In all test cases, Cell 1 is the PCell and Cell 2 is target cell with CCA. Three sub-tests (Test 1, Test 2, and Test 3) are provided different N_{oc} on Cells 1 and 2.

Table A.11.6.2.4.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Config	Description
1	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.6.2.4.2-2: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1	Test 2	Test 3
			Cell 2	Cell 2	Cell 2
SSB ARFCN			freq2	freq2	freq2
DL CCA model	Config 1, 2, 3		As specified in clause A.3.26.2.1		
UL CCA model	Config 1, 2, 3		As specified in clause A.3.26.2.2		
UL CCA probability	P _{CCA_UL}		1.0		
DL CCA probability for semi-static channel access Note 7, 8	P _{CCA_DL}		0.9375		
DL CCA probability for dynamic channel access Note 8, 9	P _{CCA_DL_1}		0.75		
	P _{CCA_DL_2}		0.75		
Duplex mode	Config 1, 2, 3		TDD		
TDD configuration	Config 1, 2, 3		TDDConf.1.1 CCA		
BW _{channel}	Config 1, 2, 3	MHz	40: N _{RB,c} = 106		
Gap pattern ID	Config 1, 2, 3		0		
BWP BW	Config 1, 2, 3		40: N _{RB,c} = 106		
DRX Cycle		ms	Not Applicable		
OCNG Patterns			OCNG pattern 1		
Time offset with Cell 1	Config 1, 2, 3	μs	3		
DBT Window configuration	Config 1, 2, 3		DBT.1		
SSB configuration	Config 1, 2, 3		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access		
SMTC configuration	Config 1, 2, 3		SMTC.1		
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 3	kHz	30 kHz		
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					

EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}		NR_CCA_FR1_I	dBm/15kHz	-86.27	-113	-112
		NR_CCA_FR1_J				-111.5
N_{oc} ^{Note2}	Config 1, 2, 3	NR_CCA_FR1_I	dBm/SCS	-83.27	-110	-109
		NR_CCA_FR1_J				-108.5
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75		-1.75
SS-RSRP ^{Not e3}	Config 1, 2, 3	NR_CCA_FR1_I		-85.02	-111.75	-110.75
		NR_CCA_FR1_J				-110.25
SS-RSRQ ^{Note3}		NR_CCA_FR1_I	dB	-14.77	-40.59	14.76
		NR_CCA_FR1_J				
I_o ^{Note3}	Config 1, 2, 3	NR_CCA_FR1_I	dBm/SCS	-50	-76.73	-75.73
		NR_CCA_FR1_J				-75.23
Propagation condition			-	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRQ, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: NR operating band groups are as defined in clause 3.5.2.						
Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.						
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.						
Note 9: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.						

Table A.11.6.2.4.2-3: SS-RSRQ Intra frequency test parameters for NR PCell

Parameter		Unit	Test 1	Test 2	Test 3
			Cell 1	Cell 1	Cell 1
SSB ARFCN			freq1		
Duplex mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not Applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
$BW_{channel}$	Config 1	MHz	10: $N_{RB,c} = 52$		
	Config 2		10: $N_{RB,c} = 52$		
	Config 3		40: $N_{RB,c} = 106$		
Gap Pattern ID			0		
BWP configuration		Initial DL BWP	DLBWP.0.1		

		Dedicated DL BWP		DLBWP.1.1		
		Initial UL BWP		ULBWP.0.1		
		Dedicated UL BWP			ULBWP.1.1	
DRX Cycle			ms	Not Applicable		
PDSCH Reference measurement channel	Config 1			SR.1.1 FDD		
	Config 2			SR.1.1 TDD		
	Config 3			SR2.1 TDD		
RMSI CORESET Reference Channel	Config 1			CR.1.1 FDD		
	Config 2			CR.1.1 TDD		
	Config 3			CR.2.1 TDD		
Control Channel RMC	Config 1			CCR.1.1 FDD		
	Config 2			CCR.1.1 TDD		
	Config 3			CCR.2.1 TDD		
TRS Configuration	Config 1			TRS.1.1 FDD		
	Config 2			TRS.1.1 TDD		
	Config 3			TRS.1.2 TDD		
OCNG Patterns				OP. 1		
SS-RSSI-Measurement				Not Applicable		
SMTc configuration	Config 1			SMTc.2		
	Config 2,3			SMTc.1		
SSB configuration	Config 1,2			SSB.1 FR1		
	Config 3			SSB.2 FR1		
CSI-RS for tracking	Config 1			TRS.1.1 FDD		
	Config 2			TRS.1.1 TDD		
	Config 3			TRS.1.2 TDD		
PDSCH/PDCCH subcarrier spacing	Config 1,2		kHz	15 kHz		
	Config 3			30 kHz		
EPRE ratio of PSS to SSS			dB	0		
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N _{oc} ^{Note2}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz z	-85	-101	-114
		NR_FDD_FR1_B				-113.5
		NR_TDD_FR1_C				-113
		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112
		NR_FDD_FR1_F				-111.5
		NR_FDD_FR1_G				-111
		NR_FDD_FR1_H				-110.5

	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-91	-	-114				
		NR_FDD_FR1_B				-113.5				
		NR_TDD_FR1_C				-113				
		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5				
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112				
		NR_FDD_FR1_F				-111.5				
		NR_FDD_FR1_G				-111				
		NR_FDD_FR1_H				-110.5				
N _{oc} ^{Note2}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-85	-101	-114				
		NR_FDD_FR1_B				-113.5				
		NR_TDD_FR1_C				-113				
		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5				
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112				
		NR_FDD_FR1_F				-111.5				
		NR_FDD_FR1_G				-111				
		NR_FDD_FR1_H				-110.5				
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-88	-	-111				
		NR_FDD_FR1_B				-110.5				
		NR_TDD_FR1_C				-110				
		NR_FDD_FR1_D, NR_TDD_FR1_D				-109.5				
		NR_FDD_FR1_E, NR_TDD_FR1_E				-109				
		NR_FDD_FR1_F				-108.5				
		NR_FDD_FR1_G				-108				
		NR_FDD_FR1_H				-107.5				
		$\hat{E}_s/I_{\text{tot}}$				dB	-1.76	-4.7	-5.46	
		$\hat{E}_s/N_{oc}$				dB	3	-2.9	-4	
SS- RSRP ^{Note 3}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-82	-103.9	-118				
		NR_FDD_FR1_B				-117.5				
		NR_TDD_FR1_C				-117				
		NR_FDD_FR1_D, NR_TDD_FR1_D				-116.5				
		NR_FDD_FR1_E, NR_TDD_FR1_E				-116				
		NR_FDD_FR1_F				-115.5				
		NR_FDD_FR1_G				-115				
		NR_FDD_FR1_H				-114.5				
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85	-	-115				
		NR_FDD_FR1_B				-114.5				
		NR_TDD_FR1_C				-114				

		NR_FDD_FR1_D, NR_TDD_FR1_D				-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-113
		NR_FDD_FR1_F				-112.5
		NR_FDD_FR1_G				-112
		NR_FDD_FR1_H				-111.5
SS-RSRQ ^{Note3}		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	-14.77	-16.76	-17.34
		NR_FDD_FR1_B				
		NR_TDD_FR1_C				
		NR_FDD_FR1_D, NR_TDD_FR1_D				
		NR_FDD_FR1_E, NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
Io ^{Note3}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-50	-70	-83.5
		NR_FDD_FR1_B				-83
		NR_TDD_FR1_C				-82.5
		NR_FDD_FR1_D, NR_TDD_FR1_D				-82
		NR_FDD_FR1_E, NR_TDD_FR1_E				-81.5
		NR_FDD_FR1_F				-81
		NR_FDD_FR1_G				-80.5
		NR_FDD_FR1_H				-80
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-50	-	-77.4
		NR_FDD_FR1_B				-76.9
		NR_TDD_FR1_C				-76.4
		NR_FDD_FR1_D, NR_TDD_FR1_D				-75.9
		NR_FDD_FR1_E, NR_TDD_FR1_E				-75.4
		NR_FDD_FR1_F				-74.9
		NR_FDD_FR1_G				-74.4
		NR_FDD_FR1_H				-73.9
Propagation condition			-	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: NR operating band groups are as defined in clause 3.5.2.						

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.11.6.2.4.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.30.1.1 and 10.1.30.1.2.

A.11.6.3 SS-SINR

A.11.6.3.1 Intra-frequency measurement accuracy

A.11.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.31.1.1.

A.11.6.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.11.6.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.11.6.3.1.2-2. In all test cases, Cell 1 is the PCell with CCA and Cell 2 is the target cell with CCA. Two sub-tests (Test 1 and Test 2) are provided different N_{oc} on Cells 1 and 2.

Table A.11.6.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.6.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1	
DL CCA model	Config 1		As specified in clause A.3.26.2.1			
UL CCA model	Config 1		As specified in clause A.3.26.2.2			
UL CCA probability	P _{CCA_UL}		1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P _{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	P _{CCA_DL_1}		0.75	-	0.75	-
	P _{CCA_DL_2}		0.75	-	0.75	-
Duplex mode	Config 1		TDD			
TDD configuration	Config 1		TDDConf.1.1 CCA			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA		SR.1.1 CCA	

RMSI CORESET Reference Channel		Config 1		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns				OP.1			
SS-RSSI-Measurement				Not Applicable			
DBT Window configuration	Config 1		DBT.1				
Time offset with Cell 1	Config 1	μs	-	3	-	3	
SSB configuration	Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access				
SMTC configuration	Config 1		SMTC.1				
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30				
EPRE ratio of PSS to SSS		dB	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}		NR_CCA_FR1_I	dBm/15kHz z	-93		-112	
		NR_CCA_FR1_J				-111.5	
N_{oc}^{Note2}	Config 1	NR_CCA_FR1_I	dBm/SCS	-90		-109	
		NR_CCA_FR1_J				-108.5	
$\hat{E}_s/I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s/N_{oc}$			dB	4.54	2.66	-4	-4
SS-RSRP ^{Not e3}	Config 1	NR_CCA_FR1_I	dBm/SCS	-85.46	-87.34	-113	-113
		NR_CCA_FR1_J				-112.5	-112.5
SS-SINR ^{Note3}		NR_CCA_FR1_I	dB	0	-3.19	-5.46	-5.46
		NR_CCA_FR1_J					
Io ^{Note3}	Config 1	NR_CCA_FR1_I	dBm/ 38.16MHz	-51.41		-75.41	
		NR_CCA_FR1_J				-74.91	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 5: NR operating band groups are as defined in clause 3.5.2.							
Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.							
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.							

Note 8:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.6.3.1.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.31.1.1.

A.11.6.3.2 Inter-frequency measurement accuracy

A.11.6.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.32.1.1 and 10.1.32.1.2.

A.11.6.3.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.11.6.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.11.6.3.2.2-2. In all test cases, Cell 1 is the PCell with CCA and Cell 2 is target cell with CCA. Three sub-tests (Test 1, Test 2, and Test 3) are provided different N_{oc} on Cells 1 and 2.

Table A.11.6.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.6.3.2.2-2: SS-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
DL CCA model	Config 1		As specified in clause A.3.26.2.1					
UL CCA model	Config 1		As specified in clause A.3.26.2.2					
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-	0.75	-
Duplex mode	Config 1		TDD					
TDD configuration	Config 1		TDDConf.1.1 CCA					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
Gap pattern ID			0	-	0	-	0	-
TRS configuration	Config 1		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA		SR.1.1 CCA		SR.1.1 CCA	

RMSI CORESET Reference Channel		Config 1		CR.1.1 CCA		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel		Config 1		CCR.1.1 CCA		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns				OP.1					
SS-RSSI-Measurement				Not Applicable					
Time offset with Cell 1	Config 1	µs	-	3	-	3	-	3	
DBT Window configuration	Config 1		DBT.1						
SSB configuration	Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access						
SMTC configuration	Config 1		SMTC.1						
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30						
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc}^{Note2}		NR_CCA_FR1_I	dBm/15kHz	-88	-108.5	-115.5			
		NR_CCA_FR1_J					-115		
N_{oc}^{Note2}	Config 1	NR_CCA_FR1_I	dBm/SCS	-85	-105.5	-112.5			
		NR_CCA_FR1_J					-112		
$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75	20	20	-4.0	-4.0
$\hat{E}_s / N_{oc}$			dB	-1.75	20	-4.0			
SS-RSRP Note3	Config 1	NR_CCA_FR1_I	dBm/SCS	-86.75	-85.5	-116.5			
		NR_CCA_FR1_J					-116		
SS-SINR ^{Note3}		NR_CCA_FR1_I	dB	-1.75	20	-4.0			
		NR_CCA_FR1_J							
Io ^{Note3}	Config 1	NR_CCA_FR1_I	dBm/38.16MHz	-51.73	-54.41	-80			
		NR_CCA_FR1_J					-79.5		
Propagation condition			-	AWGN					
Antenna configuration			-	1x2					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.									
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.									
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.									
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.									
Note 5: NR operating band groups are as defined in clause 3.5.2.									
Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.									
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.									
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.									
Note 9: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.									

A.11.6.3.2.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.32.1.1 and 10.1.32.1.2.

A.11.6.3.3 Intra-frequency measurement accuracy on SCC

A.11.6.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.31.1.1.

A.11.6.3.3.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.11.6.3.3.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.11.6.3.3.2-2. In all test cases, Cell 1 is the PCell with CCA, Cell 2 is the SCell with CCA, and Cell 3 is the target cell with CCA. Two sub-tests (Test 1 and Test 2) are provided different N_{oc} on Cells 1, 2, and 3.

Table A.11.6.3.3.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.6.3.3.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1 / Cell 2	Cell 3	Cell 1 / Cell 2	Cell 3
SSB ARFCN			freq1 for Cell 1 freq2 for Cell 2	freq2	freq1 for Cell 1 freq2 for Cell 2	freq2
DL CCA model	Config 1		As specified in clause A.3.26.2.1			
UL CCA model	Config 1		As specified in clause A.3.26.2.2			
UL CCA probability	P_{CCA_UL}		1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-
Duplex mode	Config 1		TDD			
TDD configuration	Config 1		TDDConf.1.1 CCA			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1		SR.1.1 CCA		SR.1.1 CCA	

RMSI CORESET Reference Channel	Config 1		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
DBT Window configuration	Config 1		DBT.1			
Time offset with Cell 1	Config 1	μs	3 (for Cell 2)	3	3 (for Cell 2)	3
SSB configuration	Config 1		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration	Config 1		SMTC.1			
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	30			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}		NR_CCA_FR1_I	dBm/15kHz z	-93		-112
		NR_CCA_FR1_J		-111.5		
N_{oc}^{Note2}	Config 1	NR_CCA_FR1_I	dBm/SCS	-90		-109
		NR_CCA_FR1_J		-108.5		
$\hat{E}_s / I_{ot}$		dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$		dB	4.54	2.66	-4	-4
SS- RSRP ^{Not e3}	Config 1	NR_CCA_FR1_I	dBm/SCS	-85.46	-87.34	-113
		NR_CCA_FR1_J				-112.5
SS-SINR ^{Note3}	Config 1	NR_CCA_FR1_I	dB	0	-3.19	-5.46
		NR_CCA_FR1_J				-5.46
Io ^{Note3}	Config 1	NR_CCA_FR1_I	dBm/ 38.16MHz	-51.41		-75.41
		NR_CCA_FR1_J		-74.91		
Propagation condition		-	AWGN			
Antenna configuration		-	1x2			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: NR operating band groups are as defined in clause 3.5.2.						
Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.						

Note 7:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
Note 8:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
Note 9:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

A.11.6.3.3.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.31.1.1.

A.11.6.3.4 Inter-frequency measurement accuracy

A.11.6.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.32.1.1 and 10.1.32.1.2.

A.11.6.3.4.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.11.6.3.4.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.11.6.3.4.2-2 and Table A.11.6.3.4.2-3. In all test cases, Cell 1 is the PCell and Cell 2 is target cell with CCA. Three sub-tests (Test 1, Test 2, and Test 3) are provided different N_{oc} on Cells 1 and 2.

Table A.11.6.3.4.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

Config	Description
1	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.11.6.3.4.2-2: SS-SINR Inter frequency test parameters

Parameter		Unit	Test 1	Test 2	Test 3
			Cell 2	Cell 2	Cell 2
SSB ARFCN			freq2	freq2	freq2
DL CCA model	Config 1		As specified in clause A.3.26.2.1		
UL CCA model	Config 1		As specified in clause A.3.26.2.2		
UL CCA probability	P_{CCA_UL}		1.0		
DL CCA probability for semi-static channel access Note 7, 8	P_{CCA_DL}		0.9375		
DL CCA probability for dynamic channel access Note 8, 9	$P_{CCA_DL_1}$		0.75		
	$P_{CCA_DL_2}$		0.75		
Duplex mode	Config 1		TDD		
TDD configuration	Config 1		TDDConf.1.1 CCA		
Downlink initial BWP configuration			DLBWP.0.1		
Downlink dedicated BWP configuration			DLBWP.1.1		
Uplink initial BWP configuration			ULBWP.0.1		
Uplink dedicated BWP configuration			ULBWP.1.1		

DRX Cycle configuration			ms		Not Applicable		
Gap pattern ID					-		
OCNG Patterns					OP.1		
SS-RSSI-Measurement					Not Applicable		
Time offset with Cell 1		Config 1	μs		3		
DBT Window configuration		Config 1			DBT.1		
SSB configuration		Config 1			SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access		
SMTC configuration		Config 1			SMTC.1		
PDSCH/PDCCH subcarrier spacing		Config 1	kHz		30		
EPRE ratio of PSS to SSS			dB		0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}		NR_CCA_FR1_I					
		NR_CCA_FR1_J	-115				
N_{oc}^{Note2}	Config 1	NR_CCA_FR1_I	dBm/SCS		-85	-105.5	-112.5
		NR_CCA_FR1_J					-112
$\hat{E}_s / I_{ot}$			dB		-1.75	20	-4.0
$\hat{E}_s / N_{oc}$			dB		-1.75	20	-4.0
SS-RSRP Note3	Config 1	NR_CCA_FR1_I	dBm/SCS		-86.75	-85.5	-116.5
		NR_CCA_FR1_J					-116
SS-SINR ^{Note3}		NR_CCA_FR1_I	dB	-1.75	20	-4.0	
		NR_CCA_FR1_J					
I_o ^{Note3}	Config 1	NR_CCA_FR1_I	dBm/ 38.16MHz		-51.73	-54.41	-80
		NR_CCA_FR1_J					-79.5
Propagation condition			-		AWGN		
Antenna configuration			-		1x2		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: SS-SINR, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 5: NR operating band groups are as defined in clause 3.5.2.							
Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.							
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.							
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.							

Note 9: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table A.11.6.3.4.2-3: SS-SINR Inter frequency test parameters for NR PCell

Parameter		Unit	Test 1	Test 2	Test 3
			Cell 1	Cell 1	Cell 1
SSB ARFCN			freq1	freq1	freq1
Duplex mode	Config 1		FDD		
	Config 2,3		TDD		
TDD configuration	Config 1		Not Applicable		
	Config 2		TDDConf.1.1		
	Config 3		TDDConf.2.1		
Downlink initial BWP configuration			DLBWP.0.1		
Downlink dedicated BWP configuration			DLBWP.1.1		
Uplink initial BWP configuration			ULBWP.0.1		
Uplink dedicated BWP configuration			ULBWP.1.1		
DRX Cycle configuration		ms	Not Applicable		
Gap pattern ID			0		
TRS configuration	Config 1		TRS.1.1 FDD		
	Config 2		TRS.1.1 TDD		
	Config 3		TRS.1.2 TDD		
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD		
	Config 2		SR.1.1 TDD		
	Config 3		SR2.1 TDD		
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD		
	Config 2		CR.1.1 TDD		
	Config 3		CR2.1 TDD		
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD		
	Config 2		CCR.1.1 TDD		
	Config 3		CCR2.1 TDD		
OCNG Patterns			OP.1		
SS-RSSI-Measurement			Not Applicable		
SMTc configuration	Config 1		SMTc pattern 2		
	Config 2,3		SMTc pattern 1		
SSB configuration	Config 1,2		SSB.1 FR1		
	Config 3		SSB.2 FR1		
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15		
	Config 3		30		
EPRE ratio of PSS to SSS		dB	0	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					

N_{oc} ^{Note2}	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15 kHz	-88	-108.5	-119.5		
		NR_FDD_FR1_B				-119		
		NR_TDD_FR1_C				-118.5		
		NR_FDD_FR1_D NR_TDD_FR1_D				-118		
		NR_FDD_FR1_E NR_TDD_FR1_E				-117.5		
		NR_FDD_FR1_F				-117		
		NR_FDD_FR1_G				-116.5		
		NR_FDD_FR1_H				-116		
		N_{oc} ^{Note2}				Config 1,2		dBm/S CS
Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-116.5					
	NR_FDD_FR1_B		-116					
	NR_TDD_FR1_C		-115.5					
	NR_FDD_FR1_D NR_TDD_FR1_D		-115					
	NR_FDD_FR1_E NR_TDD_FR1_E		-114.5					
	NR_FDD_FR1_F		-114					
	NR_FDD_FR1_G		-114.5					
	NR_FDD_FR1_H		-113					
	$\hat{E}_s/I_{ot}$		dB	-1.75	20	-4.0		
	$\hat{E}_s/N_{oc}$		dB	-1.75	20	-4.0		
	SS- RSRP Note3		Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/S CS	-89.75	-88.5	
NR_FDD_FR1_B				-123				
NR_TDD_FR1_C		-122.5						
NR_FDD_FR1_D NR_TDD_FR1_D		-122						
NR_FDD_FR1_E NR_TDD_FR1_E		-121.5						
NR_FDD_FR1_F		-121						
NR_FDD_FR1_G		-120.5						
NR_FDD_FR1_H		-120						
Config 3		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6						-86.75
		NR_FDD_FR1_B	-120					
		NR_TDD_FR1_C	-119.5					
		NR_FDD_FR1_D NR_TDD_FR1_D	-119					
		NR_FDD_FR1_E NR_TDD_FR1_E	-118.5					
		NR_FDD_FR1_F	-118					
		NR_FDD_FR1_G	-117.5					
		NR_FDD_FR1_H	-117					
		SS-SINR ^{Note3}			NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-1.75	
NR_FDD_FR1_B								
NR_TDD_FR1_C								

		NR_FDD_FR1_D NR_TDD_FR1_D				
		NR_FDD_FR1_E NR_TDD_FR1_E				
		NR_FDD_FR1_F				
		NR_FDD_FR1_G				
		NR_FDD_FR1_H				
Io ^{Note3}	Config 1,2	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz z	-57.83	-60.5	-90.09
		NR_FDD_FR1_B				-89.59
		NR_TDD_FR1_C				-89.09
		NR_FDD_FR1_D NR_TDD_FR1_D				-88.59
		NR_FDD_FR1_E NR_TDD_FR1_E				-88.09
		NR_FDD_FR1_F				-87.59
		NR_FDD_FR1_G				-87.09
		NR_FDD_FR1_H				-86.59
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/ 38.16M Hz	-51.73	-54.41	-84
		NR_FDD_FR1_B				-83.5
		NR_TDD_FR1_C				-83
		NR_FDD_FR1_D NR_TDD_FR1_D				-82.5
		NR_FDD_FR1_E NR_TDD_FR1_E				-82
		NR_FDD_FR1_F				-81.5
		NR_FDD_FR1_G				-81
		NR_FDD_FR1_H				-80.5
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5:	NR operating band groups are as defined in clause 3.5.2.					
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.					

A.11.6.3.4.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.32.1.1 and 10.1.32.1.2.

A.11.6.4 L1-RSRP measurement for beam reporting with CCA serving cell

A.11.6.4.1 SSB based L1-RSRP measurement

A.11.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.33.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.11.6.4.1.1-1.

Table A.11.6.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 30kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.11.6.4.1.2 Test parameters

In this set of test cases there one cell in the test, PCell under CCA (Cell 1). Cell 1 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model.

Two sub-tests (Test 1 and Test 2) are provided with different N_{oc} on Cell 1. The test parameters for the Cell 1 are given in Table A.11.6.4.1.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.11.6.4.1.2-1.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.11.6.4.1.2-1: FR1 SSB based L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1		freq1	freq1
DL CCA model	1		As specified in A.3.20.2.1	As specified in A.3.20.2.1
UL CCA model	1		As specified in A.3.20.2.2	As specified in A.3.20.2.2
Duplex mode	1		TDD	TDD
TDD configuration	1		TDDConf.1.1 CCA	TDDConf.1.1 CCA
BW _{channel}	1	MHz	40: $N_{RB,c} = 106$	40: $N_{RB,c} = 106$
PDSCH Reference measurement channel	1		SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel	1		CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel	1		CCR.1.1 CCA	CCR.1.1 CCA
SSB configuration Semi-static channel access	1		SSB.3 CCA	SSB.3 CCA
SSB configuration for Dynamic channel access	1		SSB.4 CCA	SSB.4 CCA
OCNG Patterns	1		OP.1	OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
TRS configuration	1		TRS.1.2 TDD	TRS.1.2 TDD
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1

DBT Window Configuration		1		DBT.1	DBT.1
reportConfigType		1		periodic	periodic
reportQuantity		1		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS		1		2	2
L1-RSRP reporting period		1		slot80	slot80
EPRE ratio of PSS to SSS		1	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
N_{oc} ^{Note2}	NR_TDD_FR1_I	1	dBm/15kHz	-94.65	[-113]
N_{oc} ^{Note2}	NR_TDD_FR1_I	1	dBm/SCS	-91.65	[-110]
$\hat{E}_s/I_{ot}$		1	dB	10	-3
SS-RSRP ^{Note3}	NR_TDD_FR1_I	1	dBm/SCS	-81.65	[-113]
I_o ^{Note3}	NR_TDD_FR1_I	1	dBm/38.16MHz	-50.19	[-77.19]
$\hat{E}_s/N_{oc}$		1	dB	10	-3
Propagation condition		1		AWGN	AWGN
Antenna configuration		1		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.					

A.11.6.4.1.3 Test Requirements

In both Test 1 and Test 2, the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 1 shall fulfil the requirements in clauses 10.1.33.1.

A.11.6.5 RSSI

A.11.6.5.1 Intra-frequency RSSI measurement accuracy on PCC with CCA

A.11.6.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in Section 10.1.34.1.

A.11.6.5.1.2 Test parameters

In all test cases, Cell 1 is the PCell with CCA. RSSI is measured on channel number 1. Supported test configurations are shown in table A.11.6.5.1.2-1. The accuracy of RSSI intra-frequency measurements is tested by using the parameters in A.11.6.5.1.2-2 and A.11.6.5.1.2-3.

Table A.11.6.5.1.2-1: Intra frequency RSSI supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.6.5.1.2-2: RSSI Intra frequency test parameters

Parameter		Configurations	Unit	Test 1 Cell 1
RF Channel Number				1
BW _{channel}			MHz	40
SSB configuration	Semi-static channel access ^{Note 1, 3}	1		SSB.1 CCA
	Dynamic channel access ^{Note 2, 3}	1		SSB.2 CCA
P _{CCA_DL}				0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
P _{CCA_UL}				0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model				As specified in A.3.26.2.1
UL CCA model				As specified in A.3.26.2.2
Measurement bandwidth			η_{PRE}	Same as channel access bandwidth
Channel access bandwidth			MHz	20
DRX Cycle configuration			ms	Not Applicable
PDSCH Reference measurement channel				SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA
OCNG Patterns				OP.1
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTc)			dBm/SCS	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTc)			dBm/SCS	-87

$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-58.96
Propagation condition		-	AWGN
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.			
Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.			
Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.11.6.5.1.2-3: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.11.6.5.1.3 Test Requirements

The average RSSI measurement accuracy shall fulfil the requirements in sections 10.1.34.1. The nominal RSSI used to evaluate the requirement shall be based on Io in slots corresponding to RSSI measurement time configuration (RMTC).

A.11.6.5.2 Intra-frequency RSSI measurement accuracy on SCC with CCA

A.11.6.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in Section 10.1.34.1.

A.11.6.5.2.2 Test parameters

In all test cases, Cell 1 which is PCell operating on a carrier frequency under CCA, and Cell 2 which is SCell operating on a carrier frequency under CCA. RSSI is measured on channel number 2. Supported test configurations are shown in table A.11.6.5.2.2-1. The accuracy of RSSI intra-frequency measurements is tested by using the parameters in A.11.6.5.2.2-2 and A.11.6.5.2.2-3.

Table A.11.6.5.2.2-1: Intra frequency RSSI supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.6.5.2.2-2: RSSI Intra frequency test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
BW _{channel}			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1		SSB.2 CCA	SSB.2 CCA
P _{CCA_DL}				1	0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
P _{CCA_UL}				1	0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model				N/A	As specified in A.3.26.2.1
UL CCA model				N/A	As specified in A.3.26.2.2
Measurement bandwidth			n_{PRE}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-87
$\hat{E}_s / I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)			dB	2.5	2.5

$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-58.96
Propagation condition		-	AWGN	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.6.5.2.2-3: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.11.6.5.2.3 Test Requirements

The average RSSI measurement accuracy shall fulfil the requirements in sections 10.1.34.1. The nominal RSSI used to evaluate the requirement shall be based on Io in slots corresponding to RSSI measurement time configuration (RMTC).

A.11.6.5.3 Inter-frequency RSSI measurement accuracy on a carrier with CCA

A.11.6.5.3.1 Test Purpose and Environment

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in Section 10.1.34.2.

A.11.6.5.3.2 Test parameters

In all test cases, Cell 1 which is PCell operating on a carrier frequency under CCA, and Cell 2 which is neighbor cell operating on a carrier frequency under CCA. RSSI is measured on channel number 2. Supported test configurations are shown in table A.11.6.5.3.2-1. The accuracy of RSSI intra-frequency measurements is tested by using the parameters in A.11.6.5.3.2-2 and A.11.6.5.3.2-3.

Table A.11.6.5.3.2-1: Inter frequency RSSI supported test configurations

Configuration	Description
---------------	-------------

1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz
---	---

Table A.11.6.5.3.2-2: RSSI Inter frequency test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
BW _{channel}			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1		SSB.2 CCA	SSB.2 CCA
P _{CCA_DL}				1	0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
P _{CCA_UL}				1	0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model				N/A	As specified in A.3.26.2.1
UL CCA model				N/A	As specified in A.3.26.2.2
Measurement bandwidth			n_{PRE}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-87

$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measB W	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measB W	-77.96	-58.96
Propagation condition		-	AWGN	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.6.5.3.2-3: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.11.6.5.3.3 Test Requirements

The average RSSI measurement accuracy shall fulfil the requirements in sections 10.1.34.2. The nominal RSSI used to evaluate the requirement shall be based on Io in slots corresponding to RSSI measurement time configuration (RMTC).

A.11.6.6 Channel occupancy

A.11.6.6.1 Intra-frequency channel occupancy measurement accuracy on PCC with CCA

A.11.6.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in Section 10.1.35.1.

A.11.6.6.1.2 Test parameters

In all test cases, Cell 1 is the PCell with CCA. channel occupancy is measured on channel number 1. Supported test configurations are shown in table A.11.6.6.1.2-1. The accuracy of channel occupancy intra-frequency measurements is tested by using the parameters in A.11.6.6.1.2-2 and A.11.6.6.1.2-3.

Table A.11.6.6.1.2-1: Intra frequency CO supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.6.6.1.2-2: CO Intra frequency test parameters

Parameter		Configurations	Unit	Test 1 Cell 1
RF Channel Number				1
BW _{channel}			MHz	40
SSB configuration	Semi-static channel access ^{Note 1, 3}	1		SSB.1 CCA
	Dynamic channel access ^{Note 2, 3}	1		SSB.2 CCA
P _{CCA_DL}				0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
P _{CCA_UL}				0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model				As specified in A.3.26.2.1
UL CCA model				As specified in A.3.26.2.2
Measurement bandwidth			η_{PRE}	Same as channel access bandwidth
Channel access bandwidth			MHz	20
DRX Cycle configuration			ms	Not Applicable
PDSCH Reference measurement channel				SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA
OCNG Patterns				OP.1
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTc)			dBm/SCS	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTc)			dBm/SCS	-87

$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-58.96
Propagation condition		-	AWGN
channelOccupancyThreshold		dBm	-83
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.11.6.6.1.2-3: CO RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.11.6.6.1.3 Test Requirements

The nominal reported *channelOccupancy* shall be 100%. At least 90% of channel occupancy reports made by the UE shall indicate this value.

A.11.6.6.2 Intra-frequency channel occupancy measurement accuracy on SCC with CCA

A.11.6.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in Section 10.1.35.1.

A.11.6.6.2.2 Test parameters

In all test cases, Cell 1 which is PCell operating on a carrier frequency under CCA, and Cell 2 which is SCell operating on a carrier frequency under CCA. Channel occupancy is measured on channel number 2. Supported test configurations are shown in table A.11.6.6.2.2-1. The accuracy of channel occupancy intra-frequency measurements is tested by using the parameters in A.11.6.6.2.2-2 and A.11.6.6.2.2-3.

Table A.11.6.6.2.2-1: Intra frequency CO supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.6.6.2.2-2: CO Intra frequency test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
BW_{channel}			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1		SSB.2 CCA	SSB.2 CCA
$P_{\text{CCA_DL}}$				1	0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
$P_{\text{CCA_UL}}$				1	0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model				N/A	As specified in A.3.26.2.1
UL CCA model				N/A	As specified in A.3.26.2.2
Measurement bandwidth			n_{PRE}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-87

$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-58.96
Propagation condition		-	AWGN	
channelOccupancyThreshold		dBm	-83	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.6.6.2.2-3: CO RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.11.6.6.2.3 Test Requirements

The nominal reported *channelOccupancy* shall be 100%. At least 90% of channel occupancy reports made by the UE shall indicate this value.

A.11.6.6.3 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA

A.11.6.6.3.1 Test Purpose and Environment

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in Section 10.1.35.2.

A.11.6.6.3.2 Test parameters

In all test cases, Cell 1 which is PCell operating on a carrier frequency under CCA, and Cell 2 which is neighbor cell operating on a carrier frequency under CCA. Channel occupancy is measured on channel number 2. Supported test configurations are shown in table A.11.6.6.3.2-1. The accuracy of channel occupancy intra-frequency measurements is tested by using the parameters in A.11.6.6.3.2-2 and A.11.6.6.3.2-3.

Table A.11.6.6.3.2-1: Inter frequency CO supported test configurations

Configuration	Description
1	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, bandwidth 40 MHz

Table A.11.6.6.3.2-2: CO Inter frequency test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
BW_{channel}			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1		SSB.1 CCA	SSB.1 CCA
	Dynamic channel access Note 2, 3	1		SSB.2 CCA	SSB.2 CCA
$P_{\text{CCA_DL}}$				1	0.9375 (Note 1, 3) 0.75 / 0.75 (Note 2, 3)
$P_{\text{CCA_UL}}$				1	0.87 (Note 1, 3) 0.75 (Note 2, 3)
DL CCA model				N/A	As specified in A.3.26.2.1
UL CCA model				N/A	As specified in A.3.26.2.2
Measurement bandwidth			n_{PRE}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel				SR.1.1 CCA	SR.1.1 CCA
RMSI CORESET Reference Channel				CR.1.1 CCA	CR.1.1 CCA
Dedicated CORESET Reference Channel				CCR.1.1 CCA	CCR.1.1 CCA
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-106

N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measB W	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measB W	-77.96	-58.96
Propagation condition		-	AWGN	
channelOccupancyThreshold		dBm	-83	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.11.6.6.3.2-3: CO RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.11.6.6.3.3 Test Requirements

The nominal reported *channelOccupancy* shall be 100%. At least 90% of channel occupancy reports made by the UE shall indicate this value.

A.11.6.7 E-UTRAN RSRP

A.11.6.8 E-UTRAN RSRQ

A.11.6.9 E-UTRAN SINR

A.12 E-UTRA Standalone Tests with at Least One NR Cell under CCA

A.12.1 RRC_IDLE state mobility

A.12.1.1 Inter-RAT cell re-selection to NR on a carrier frequency with CCA

A.12.1.1.1 E-UTRA Cell reselection to higher priority NR target Cell in FR1 when target cell is subject to CCA

A.12.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the E-UTRAN to NR inter-RAT cell subject to CCA reselection requirements specified in clause 4.2.2.5.7 in TS 36.133 [15].

The test scenario comprises of 1 E-UTRA cell and 1 NR cell subject to CCA as given in tables A.12.1.1.1.1-1, A.8.2.1.1.1-2, A.8.2.1.1.1-3 and A.8.2.1.1.1-4. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. E-UTRA cell 1 is already identified by the UE prior to the start of the test. Cell 2 is of higher priority than cell 1.

Table A.12.1.1.1.1-1: Supported test configurations

Configuration	Description of a cell without CCA	Description of a cell with CCA
1	LTE FDD	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.12.1.1.1.1-2: General test parameters for E-UTRA cell re-selection FR1 NR cell subject to CCA test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell 2 in the initial phase
	Neighbour cell		1, 2	Cell1	
T1 end condition	Active cell			Cell1	During T1 period the UE reselects to cell 1
	Neighbour cell			Cell2	
T3 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to cell 2 during T3
	Neighbour cell		1, 2	Cell1	

RF Channel Number		1, 2	1, 2	E-UTRAN radio channel (1) and NR radio channel (2) are used for this test
Time offset between cells		1, 2	3 μ s	Synchronous cells
Access Barring Information	-	1, 2	Not Sent	No additional delays in random access procedure.
DBT Window Configuration		1, 2	DBT.1	As specified in clause A.3.28.1.
DL CCA model		1, 2	As specified in clause A.3.26.2.1	DL CCA model
UL CCA model		1, 2	As specified in clause A.3.26.2.2	UL CCA model
DRX cycle length	s	1, 2	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index		1, 2	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
T1	s	1, 2	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.12.1.1.1.1-3: Cell specific test parameters for NR cell 2 subject to CCA

Parameter	Unit	Test configuration	Cell 2		
			T1	T2	T3
TDD configuration		1, 2	TDDConf.1.1.CCA		
DL CCA probability for semi-static channel access (P_{CCA_DL})		1, 2	0.9		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_1}$)		1, 2	0.75		
DL CCA probability for for dynamic static channel access ($P_{CCA_DL_2}$)		1, 2	0.5		
UL CCA probability P_{CCA_UL}		1, 2	1		
$M_{d,max}$		1, 2	16		
$M_{m,max}$		1, 2	4		
$M_{e,max}$		1, 2	8		
PDSCH Reference measurement channel		1, 2	SR.1.1 CCA		
RMSI CORESET Reference Channel		1, 2	CR.1.1 CCA		
RMC CORESET Reference Channel		1, 2	CCR.1.1 CCA		
NR SMTC parameters		1, 2	SMTC.1		
OCNG Patterns		1, 2	OP.1		
SSB configuration		1, 2	SSB.1 CCA ^{Note4} SSB.2 CCA ^{Note5,6}		

Initial DL BWP configuration		1, 2	DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1		
RLM-RS		1, 2	SSB		
Qrxlevmin	dBm/SCS	1, 2	-137		
Pcompensation	dB	1, 2	0		
Qhysts	dB	1, 2	0		
Qoffsets,n	dB	1, 2	0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, 2	-4	-infinity	12
N_{oc} ^{Note2}	dBm/SCS	1, 2	-95		
N_{oc} ^{Note2}	dBm/15 kHz	1, 2	-98		
$\hat{E}_s / N_{oc}$	dB	1, 2	-4	-infinity	12
SS-RSRP ^{Note3}	dBm/SCS	1, 2	-99	-infinity	-83
Io	dBm/38.16 MHz	1, 2	-62.50	-63.95	-51.69
Treselection	s	1, 2	0	0	0
SnonintrasearchP	dB	1, 2	50		
Thresh _{x, highP}	dB	1, 2	48		
Thresh _{serving, lowP}	dB	1, 2	44		
Thresh _{x, lowP}	dB	1, 2	50		
Propagation Condition		1, 2	AWGN		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. . For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.				
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
Note 5:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
Note 6:	For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.				

Table A.12.1.1.1-4: Cell specific test parameters for E-UTRA cell 1

Parameter	Unit	Cell 1		
		T1	T2	T3
E-UTRA RF Channel number		1		
BW _{channel}	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			

PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
OCNG_RB ^{Note 1}	dB			
Qrxlevmin	dBm	-140		
N_{oc} ^{Note 2}	dBm/15 kHz	-98		
RSRP ^{Note 3}	dBm/15 KHz	-84	-84	-84
$\hat{E}_s/I_{ot}$	dB	14	14	14
$\hat{E}_s/N_{oc}$	dB	14	14	14
Treselection _{EUTRAN}	S	0		
SnonintrasearchP	dB	50		
Thresh _{x, highP}	dB	48		
Thresh _{serving, lowP}	dB	44		
Thresh _{x, lowP}	dB	50		
Propagation Condition		AWGN		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.12.1.1.1.2 Test Requirements

The cell reselection delay to a higher priority NR cell subject to CCA is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than $60 + 1.28 \times (5 + M_e) + T_{SL_CCA}$ s. M_e is the number of DRX cycles with at least one SMTC where there are no SSBs available during the $T_{evaluate, NR_Intra_CCA}$. If $M_e > M_{e, max}$ the UE is required to restart the evaluation of cell 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{higher_priority_search} + T_{evaluate, NR_inter_CCA} + T_{SL_CCA}$, and to a lower priority cell can be expressed as: $T_{evaluate, NR} + T_{SL_NR}$.

Where:

$T_{higher_priority_search}$ See clause 4.2.2 in TS 36.133 [15]

$T_{evaluate, NR_inter_CCA}$ See Table 4.2.2.5.7-1 in clause 4.2.2.5.7

T_{SL_CCA} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell.

$T_{\text{evaluate, NR}}$ See Table 4.2.2.5.6-1 in clause 4.2.2.5.6 in TS 36.133 [15]

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority NR cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

A.12.2 RRC_CONNECTED state mobility

A.12.2.1 Handover

A.12.2.1.1 E-UTRAN - NR with CCA handover

A.12.2.1.1.1 Test Purpose and Environment

This test shall verify the E-UTRAN to NR FR1 handover requirements specified in clause 5.3.4A in TS 36.133 [15].

The test comprises of one E-UTRA carrier and one NR carrier with CCA. There are two cells and one cell on each carrier. Cell 1 is the E-UTRAN cell and Cell 2 is an inter-RAT NR neighbour cell with CCA.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 8.1.2.1-1 of TS 36.133 [15] is configured before T2 begins to enable inter-RAT frequency monitoring. A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.12.2.1.1-1. General test parameters are provided in Table A.12.2.1.1-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.12.2.1.1-3 and A.12.2.1.1-4 respectively.

Table A.12.2.1.1-1: Supported test configurations for E-UTRAN inter-RAT NR handover

Configuration	Description
1	LTE FDD, NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR with CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.12.2.1.1-2: General test parameters for E-UTRAN inter-RAT NR handover

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency with CCA is used in the test
LTE RF Channel Number		2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell	Cell 1	E-UTRAN cell
	Neighbouring cell	Cell 2	NR cell with CCA
Final condition	Active cell	Cell 2	
DL CCA model		As specified in clause A.3.26.2.1	
UL CCA model		As specified in clause A.3.26.2.2	
NR measurement quantity		SS-RSRP	
E-UTRAN measurement quantity		RSRP	

b2-Threshold1	dBm	-84	Absolute E-UTRAN RSRP threshold for event B2
b2-Threshold2NR	dBm	As specified in Table A.12.2.1.1-4	Absolute NR SS-RSRP threshold for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure
Time offset between cells		3 ms	Asynchronous cells
Gap pattern configuration Id		0	As specified in Table 8.1.2.1-1 started before T2 starts [15]
T1	s	5	
T2	s	≤5	
T3	s	1	

Table A.12.2.1.1-3: Cell specific test parameters for E-UTRAN inter-RAT NR handover with CCA (Cell 1)

Parameter	Unit	Configuration	Cell 1		
			T1	T2	T3
RF channel number		1, 2	2		
Duplex mode		1	FDD		
		2	TDD		
TDD special subframe configuration ^{Note1}		1, 2	6		
TDD uplink-downlink configuration ^{Note1}		1, 2	1		
BW _{channel}	MHz	1, 2	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100		
PRACH Configuration ^{Note2}		1	4		
		2	53		
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns ^{Note3}		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1, 2	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					

PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note4}					
OCNG_RB ^{Note4}					
N _{oc} ^{Note5}	dBm/15kHz	1, 2	-98		
Ê _s /N _{oc}	dB	1, 2	7	7	7
Ê _s /I _{ot} ^{Note6}	dB	1, 2	7	7	7
RSRP ^{Note6}	dBm/15kHz	1, 2	-91	-91	-91
SCH_RP ^{Note6}	dBm/15kHz	1, 2	-91	-91	-91
I _o ^{Note6}	dBm/9MHz	1, 2	-62.43	-62.43	-62.43
Propagation Condition		1, 2	AWGN		
Antenna Configuration and Correlation Matrix ^{Note7}		1, 2	1x2 Low		
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2:	PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].				
Note 3:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 4:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 5:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 6:	Ê _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 7:	Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

Table A.12.2.1.1-4: Cell specific test parameters E-UTRAN inter-RAT NR with CCA handover (Cell 2)

Parameter		Unit	Configuration	Cell 2		
				T1	T2	T3
RF channel number			1, 2	1		
DL CCA probability P_{CCA_DL}	Semi-static channel access ^{Note 4, 6}		1, 2	$P_{CCA_DL}=0.9375$		
	Dynamic channel access ^{Note 5, 6}		1, 2	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		
UL CCA probability P_{CCA_UL}	Semi-static channel access ^{Note 4, 6}		1, 2	$P_{CCA_UL}=0.87$		
	Dynamic channel access ^{Note 5, 6}		1, 2	$P_{CCA_UL}=0.75$		
L_{CCA_DL}		-	1, 2	5		
W_{CCA_DL}		ms	1, 2	T304		
L_{CCA_UL}		-	1, 2	5		
W_{CCA_UL}		ms	1, 2	T304		
T304		ms	1, 2	500		
Duplex mode			1, 2	TDD		
TDD Configuration			1, 2	TDDConf.1.1 CCA		
$BW_{channel}$		MHz	1, 2	40: $N_{RB,c} = 106$ (TDD)		
PDSCH reference measurement channel			1, 2	SR.1.1 CCA		
CORESET reference channel			1, 2	CR.1.1 CCA		
PRACH configuration			1, 2	FR1 PRACH configuration 1 under CCA		
OCNG pattern ^{Note1}			1, 2	OP.1		

BWP	Initial DL BWP		1, 2	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2	SMTC.1		
SSB configuration	Semi-static channel access Note 4, 6		1, 2	SSB.1 CCA		
	Dynamic channel access Note 5, 6		1, 2	SSB.2 CCA		
DBT window configuration				As defined in A.3.28.1		
b2-Threshold2NR		dBm	1	-105		
			2	-103		
EPRE ratio of PSS to SSS		dB	1, 2	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N_{oc} Note2		dBm/15 KHz	1, 2	-98		
N_{oc} Note2		dBm/SCS	1, 2	-95		
$\hat{E}_s/N_{oc}$		dB	1, 2	-inifinit	0	0
$\hat{E}_s/I_{ot}$ Note3		dB	1, 2	-inifinit	0	0
SS-RSRP Note3		dBm/SCS	1, 2	-inifinit	-95	-95
I_o Note3		dBm/38.16 MHz	1, 2	-63.96	-60.94	-60.94
Propagation condition			1, 2	AWGN		
Antenna Configuration and Correlation Matrix			1, 2	1x2 Low		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.						
Note 5: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.						
Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.						

A.12.2.1.1.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than $112 + (L_1' + L_3) \cdot 20$ ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{\text{interrupt}}$, where:

RRC procedure delay = 50 ms and is specified in TS36.331.

$T_{\text{interrupt}} = 62 + (L_1' + L_3) \cdot T_{\text{SMTC}}$; $T_{\text{interrupt}}$ is defined in TS36.133 clause 5.3.4A.3 where

- L_1' is the number of SMTC occasions not available at the UE during the inter-RAT detection period.
- L_3 is the number of consecutive SSB to PRACH occasion association periods during which no PRACH occasion is available for PRACH transmission due to UL CCA failure. $L_3 = 0$ for Type 2C UL channel access procedure as defined in TS 37.213 [33].

$T_{\text{SMTC}} = 20$ ms is the SMTC periodicity ms in the test.

This gives a total of $112 + (L_1' + L_3) \cdot 20$ ms.

A.12.3 Void

A.12.4 Measurement procedure

A.12.4.1 E-UTRAN–NR inter-RAT SFTD measurements

A.12.4.1.1 E-UTRA – NR Inter-RAT SFTD Measurement Delay with NR under CCA in non-DRX

A.12.4.1.1.1 Test Purpose and Environment

The purpose of this test is to partly verify that measurement reporting delay for SFTD between E-UTRA PCell and inter-RAT NR neighbour cell under CCA is within the requirements stated in clauses 8.1.2.4.25 and 8.1.2.4.26 of TS 36.133 [15] for E-UTRA FDD and TDD, respectively, when no measurement gaps are provided and no DRX is configured.

The tests consist of a single time period of duration T1. Two carriers are used in the tests: one E-UTRA carrier with the PCell (Cell 1), and one NR carrier under CCA with the NR neighbour cell (Cell 2).

Prior to the start of time duration T1, the UE is connected to Cell 1 and configured to carry out intra-frequency measurements only. The point in time at which the UE receives, at the UE antenna connector(s), a RRC message containing a measurement configuration for SFTD measurements on RF channel 2 defines the start of time duration T1. Following the start of T1 the UE shall detect Cell 2, determine the SFN and frame time difference of Cell 2 relative to Cell 1, and send a measurement report.

The supported test configurations are listed in Table A.12.4.1.1.1-1 below. General test parameters and cell-specific parameters for the NR cell are provided in Tables A.12.4.1.1.1-2 and A.12.4.1.1.1-3 below, respectively. Cell-specific parameters for the E-UTRA cell are provided in clause A.3.7.2.1.

Table A.12.4.1.1.1-1: Applicable test configurations for inter-RAT SFTD measurement delay test with NR under CCA

Config	Description
--------	-------------

1	LTE FDD; NR: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD; NR: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.12.4.1.1.1-2: General test parameters for inter-RAT SFTD measurement delay test with NR under CCA

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		Config 1,2	1		One E-UTRAN carrier frequencies is used.
NR RF Channel Number		Config 1,2	1		One NR carrier frequencies is used.
Active cell		Config 1,2	Cell 1		Cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		Config 1,2	Cell 2		Cell 2 is on NR RF channel number 1.
CP length		Config 1,2	Normal		Applicable to both cells.
DRX		Config 1,2	OFF		DRX is not used
Frame time offset between serving and neighbour cells	ms	Config 1	3	7	Asynchronous cells. The timing of Cell 2 relative to the timing of Cell 1.
	μs	Config 2	3		Synchronous cells.
SFN offset between serving and neighbour cells		Config 1,2	0	1	SFN of Cell 2 relative to SFN of Cell 1.
SS-RSRP reporting		Config 1,2	No		Only SFTD is reported.
T1	s	Config 1,2	2		T1 shall exceed $T_{\text{measure_SFTD_LBT_max}} = 56 \times \text{SMTC}$

Table A.12.4.1.1.1-3: Cell specific test parameters for Cell 2 in inter-RAT SFTD measurement delay test with NR under CCA

Parameter		Unit	Cell 2
NR RF Channel Number			1
Duplex mode			TDD
BW _{channel}		MHz	40: N _{RB,c} = 106
TDD configuration			TDDConf.1.1 CCA
DL CCA model			As specified in clause A.3.26.2.1
DL CCA probability for semi-static channel access ^{Note5,7}	P _{CCA_DL}		0.9375
DL CCA probability for dynamic channel access ^{Note6,7}	P _{CCA_DL_1}		0.75
	P _{CCA_DL_2}		0.75
OCNG Pattern defined in A.3.2.1.1 ^{Note 1}			OP.1
SMTC configuration defined in A.3.2.11.1 and A.3.2.11.2			SMTC.2
SSB configuration for semi-static channel access ^{Note5,7}			SSB.1 CCA
SSB configuration for dynamic channel access ^{Note6,7}			SSB.2 CCA
DBT window configuration			DBT.1

PDSCH/PDCCH subcarrier spacing	kHz	30
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS	dB	
EPRE ratio of PBCH to PBCH DMRS	dB	
EPRE ratio of OCNG DMRS to SSS Note 1	dB	
EPRE ratio of OCNG to OCNG DMRS Note 1	dB	
N_{oc} Note 2	dBm/15 kHz	-98
N_{oc} Note 2	dBm/SCS	-95
SS-RSRP Note 3, 4	dBm/SCS	-91
$\tilde{E}_s/I_{ot}$	dB	4
$\tilde{E}_s/N_{oc}$	dB	4
I_o Note 3	dBm/38.16 MHz	-58.50
Propagation Condition		AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 7: For UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel access only..		

A.12.4.1.1.2 Test Requirements

Following the start of T1, the UE shall detect Cell 2 and determine the relative time difference between Cell 1 and Cell 2. At latest at $T_{RRC_procedure_delay} + T_{measure_SFTD_LBT_max}$ after the beginning of time duration T1, the UE shall send a measurement report on SFTD between Cell 1 and Cell 2.

The observed rate of successful SFTD reports in repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ longer than the measurement reporting delays above due to TTI insertion uncertainty of the measurement report in DCCH.

A.12.4.2 E-UTRAN–NR inter-RAT measurements on NR carrier frequency under CCA

A.12.4.2.1 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

A.12.4.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21A of TS 36.133 [15] for E-UTRAN FDD-NR measurements under CCA and clause 8.1.2.4.22A of TS 36.133 [15] for E-UTRAN TDD-NR measurements under CCA.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1 on a carrier frequency with CCA. The test parameters are given in Tables A.12.4.2.1.1-1, A.12.4.2.1.1-2, A.12.4.2.1.1-3 and A.12.4.2.1.1-4. Cell transmits SSBs in DBT windows according to DL CCA model.

In this test, measurement gap pattern configuration # 0 as defined in Table A.12.4.2.1.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.12.4.2.1.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
2	LTE TDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.12.4.2.1.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		1, 2	1	One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1	One FR1 NR carrier frequency under CCA is used.
DL CCA model			As specified in clause A.3.26.2.1	
UL CCA model			As specified in clause A.3.26.2.2	
L _{CCA_DL}		1, 2	12	
W _{CCA_DL}	ms	1, 2	T _{PSS/SSS_sync_irat_cca}	
Active cell		1, 2	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].

Measurement gap offset		1, 2	39	As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2	Note 1	E-UTRA RSRP/RSRQ/SINR threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2	Note 2	SS-RSRP/ SS-RSRQ/ SS-SINR threshold measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2	0	
CP length		1, 2	Normal	
TimeToTrigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	DRX is not used
Time offset between serving and neighbour cells		1, 2	3µs	Synchronous cells.
T1	s	1, 2	5	
T2	s	1, 2	$\geq T_{\text{identify_irat_cca_without_index}}$	$T_{\text{identify_irat_cca_without_index}}$ is defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133
Note 1: The value of b2-Threshold1 is defined in Table A.12.4.2.1.1-3				
Note 2: The value of b2-Threshold2NR is defined in Table A.12.4.2.1.1-4				

Table A.12.4.2.1.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration ^{Note1}		2	6	
TDD uplink-downlink configuration ^{Note1}		2	1	
BW _{channel}	MHz	1, 2	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	

b2-Threshold1	dBm	1, 2	-77	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$ ^{Note5}	dB	1, 2	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2	-87	-87
I _o ^{Note5}	dBm/9MHz	1, 2	-59.13+10log (N _{RB,C} /50)	-59.13+10log (N _{RB,C} /50)
Propagation Condition ^{Note6}		1, 2	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2	1x2 Low	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

Table A.12.4.2.1.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2	2	
TDD configuration		1, 2	TDDConf.1.1 CCA	
BW _{channel}	MHz	1, 2	40: N _{RB,c} = 106	
P _{CCA_DL} for dynamic channel access ^{Note 6,8}		1, 2	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75	
P _{CCA_DL} for semi-static channel access ^{Note 7,8}		1, 2	P _{CCA_DL} =0.9375	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1	
DBT window configuration		1, 2	DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	

b2-Threshold2NR	dBm	1, 2	-98	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} Note2	dBm/15kHz	1, 2	-98	
N_{oc} Note2	dBm/SCS	1, 2	-95	
SS-RSRP Note 3,5	dBm/SCS	1, 2	-Infinity	-88
$\hat{E}_s/I_{ot}$ Note 5	dB	1, 2	-Infinity	7
$\hat{E}_s/N_{oc}$ Note 5	dB	1, 2	-Infinity	7
I_o Note3	dBm/38.16MHz z	1, 2	-63.95	-56.16
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix		1, 2	1x2 Low	
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.				
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
NOTE 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.				
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

A.12.4.2.1.2 Test Requirements

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index. $T_{identify_irat_cca_without_index}$ is defined in defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.12.4.2.2 E-UTRA-NR inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used

A.12.4.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21 A of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22A of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1 on a carrier frequency with CCA. The test parameters are given in Tables A.12.4.2.2.1-1, A.12.4.2.2.1-2, A.12.4.2.2.1-3 and A.12.4.2.2.1-4. Cell transmits SSBs in DBT windows according to DL CCA model.

In this test, measurement gap pattern configuration # 0 as defined in Table A.12.4.2.2.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.12.4.2.2.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
2	LTE TDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.12.4.2.2.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2	1		One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1		One FR1 NR carrier frequency under CCA is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
DL CCA model			As specified in clause A.3.26.2.1		
UL CCA model			As specified in clause A.3.26.2.2		
L_{CCA_DL}		1, 2	12	5	
W_{CCA_DL}	ms	1, 2	$T_{PSS/SSS_sync_irat_cca}$		
Neighbour cell		1, 2	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39		As specified in TS 36.331 [16].

b2-Threshold1	dBm	1, 2	Note 1	E-UTRA RSRP/RSRQ/SINR threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2	Note 2	SS-RSRP/ SS-RSRQ/ SS-SINR threshold measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2	0	
CP length		1, 2	Normal	
TimeToTrigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	DRX.9 DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1, 2	3µs	Synchronous cells.
T1	s	1, 2	5	
T2	s	1, 2	$\geq T_{\text{identify_irat_cca_without_index}}$	$T_{\text{identify_irat_cca_without_index}}$ is defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133
Note 1: The value of b2-Threshold1 is defined in Table A.12.4.2.1.1-3				
Note 2: The value of b2-Threshold2NR is defined in Table A.12.4.2.1.1-4				

Table A.12.4.2.2.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration ^{Note1}		2	6	
TDD uplink-downlink configuration ^{Note1}		2	1	
BW _{channel}	MHz	1, 2	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77	

PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$ ^{Note5}	dB	1, 2	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2	-87	-87
I _o ^{Note5}	dBm/9MHz	1, 2	-59.13+10log (N _{RB,C} /50)	-59.13+10log (N _{RB,C} /50)
Propagation Condition ^{Note6}		1, 2	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2	1x2 Low	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

Table A.12.4.2.2.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2	1	
TDD configuration		1, 2	TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c} = 106$	
P_{CCA_DL} for dynamic channel access ^{Note 6,8}		1, 2	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	
P_{CCA_DL} for semi-static channel access ^{Note 7,8}		1, 2	$P_{CCA_DL}=0.9375$	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1	
DBT window configuration		1, 2	DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	
b2-Threshold2NR	dBm	1, 2	-98	
EPRE ratio of PSS to SSS		1, 2	0	

EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note2}	dBm/15kHz	1, 2	-98	
N_{oc} ^{Note2}	dBm/SCS	1, 2	-95	
SS-RSRP ^{Note 3,5}	dBm/SCS	1, 2	-Infinity	-88
$\hat{E}_s/I_{tot}$ ^{Note 5}	dB	1, 2	-Infinity	7
$\hat{E}_s/N_{oc}$ ^{Note 5}	dB	1, 2	-Infinity	7
I_o ^{Note3}	dBm/38.16MHz z	1, 2	-63.95	-56.16
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low	
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.				
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
NOTE 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.				
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

A.12.4.2.2.2 Test Requirements

In test 1, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{identify_irat_cca_without_index}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1 and 2, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.12.4.2.3 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

A.12.4.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21A of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22A of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1 on a carrier frequency with CCA. The test parameters are given in Tables A.12.4.2.3.1-1, A.12.4.2.3.1-2, A.12.4.2.3.1-3 and A.12.4.2.3.1-4. Cell transmits SSBs in DBT windows according to DL CCA model.

In this test, measurement gap pattern configuration # 0 as defined in Table A.12.4.2.3.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.12.4.2.3.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR1

Configuration	Description
1	LTE FDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
2	LTE TDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.12.4.2.3.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		1, 2	1	One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1	One FR1 NR carrier frequency under CCA is used.
DL CCA model			As specified in clause A.3.26.2.1	
UL CCA model			As specified in clause A.3.26.2.2	
L _{CCA_DL}		1, 2	12	
W _{CCA_DL}	ms	1, 2	T _{PSS/SSS_sync_rat_cca}	
Active cell		1, 2	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39	As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2	Note 1	E-UTRA RSRP/RSRQ/SINR threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]

b2-Threshold2NR	dBm	1, 2	Note 2	SS-RSRP/ SS-RSRQ/ SS-SINR threshold measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2	0	
CP length		1, 2	Normal	
TimeToTrigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	DRX is not used
Time offset between serving and neighbour cells		1, 2	3μs	Synchronous cells.
T1	s	1, 2	5	
T2	s	1, 2	$\geq T_{\text{identify_irat_cca_with_index}}$	$T_{\text{identify_irat_cca_with_index}}$ is defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133
Note 1: The value of b2-Threshold1 is defined in Table A.12.4.2.3.1-3				
Note 2: The value of b2-Threshold2NR is defined in Table A.12.4.2.3.1-4				

Table A.12.4.2.3.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 with SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration ^{Note1}		2	6	
TDD uplink-downlink configuration ^{Note1}		2	1	
BW _{channel}	MHz	1, 2	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				

PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2	-104	
Ē _s /N _{oc}	dB	1, 2	17	17
Ē _s /I _{ot} ^{Note5}	dB	1, 2	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2	-87	-87
I _o ^{Note5}	dBm/9MHz	1, 2	-59.13+10log (N _{RB,c} /50)	-59.13+10log (N _{RB,c} /50)
Propagation Condition ^{Note6}		1, 2	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2	1x2 Low	
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].			
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.			
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 5:	Ē _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 6:	Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].			

Table A.12.4.2.3.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2	1	
TDD configuration		1, 2	TDDConf.1.1 CCA	
$BW_{channel}$	MHz	1, 2	40: $N_{RB,c} = 106$	
P_{CCA_DL} for dynamic channel access ^{Note 6,8}		1, 2	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	
P_{CCA_DL} for semi-static channel access ^{Note 7,8}		1, 2	$P_{CCA_DL}=0.9375$	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1	
DBT window configuration		1, 2	DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	
b2-Threshold2NR	dBm	1, 2	-98	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				

EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note2}	dBm/15kHz	1, 2	-98	
N_{oc} ^{Note2}	dBm/SCS	1, 2	-95	
SS-RSRP ^{Note 3,5}	dBm/SCS	1, 2	-Infinity	-88
$\hat{E}_s/I_{tot}$ ^{Note 5}	dB	1, 2	-Infinity	7
$\hat{E}_s/N_{oc}$ ^{Note 5}	dB	1, 2	-Infinity	7
I_o ^{Note3}	dBm/38.16MHz	1, 2	-63.95	-56.16
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low	
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.				
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
NOTE 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.				
NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

A.12.4.2.3.2 Test Requirements

The UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_irat_cca_with_index}}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.12.4.2.4 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used

A.12.4.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.1.2.4.21A of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.1.2.4.22A of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1 on a carrier frequency with CCA. The test parameters are given in Tables A.12.4.2.4.1-1, A.12.4.2.4.1-2, A.12.4.2.4.1-3 and A.12.4.2.4.1-4. Cell transmits SSBs in DBT windows according to DL CCA model.

In this test, measurement gap pattern configuration # 0 as defined in Table A.12.4.2.4.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.12.4.2.4.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR1

Configuration	Description
1	LTE FDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
2	LTE TDD; NR with CCA: SCS 30 kHz, BW 40 MHz, TDD
NOTE: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.12.4.2.4.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2	1		One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1		One FR1 NR carrier frequency under CCA is used.
DL CCA model			As specified in clause A.3.26.2.1		
UL CCA model			As specified in clause A.3.26.2.2		
LCCA_DL		1, 2	12	5	
WCCA_DL	ms	1, 2	T _{PSS/SSS_sync_rat_cca}		
Active cell		1, 2	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39		As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2	Note 1		E-UTRA RSRP/RSRQ/SINR threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2	Note 2		SS-RSRP/ SS-RSRQ/ SS-SINR threshold measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2	0		
CP length		1, 2	Normal		
TimeToTrigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.9	DRX.12	As specified in clause A.3.3

Time offset between serving and neighbour cells		1, 2	3μs	Synchronous cells.
T1	s	1, 2	5	
T2	s	1, 2	$\geq T_{\text{identify_irat_cca_with_index}}$	$T_{\text{identify_irat_cca_with_index}}$ is defined in clause 8.1.2.4.21A.1 and 8.1.2.4.22A.1 in TS 36.133
Note 1: The value of b2-Threshold1 is defined in Table A.12.4.2.4.1-3				
Note 2: The value of b2-Threshold2NR is defined in Table A.12.4.2.4.1-4				

Table A.12.4.2.4.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 with SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2	1	
Duplex mode		1	FDD	
		2	TDD	
TDD special subframe configuration ^{Note1}		2	6	
TDD uplink-downlink configuration ^{Note1}		2	1	
BW _{channel}	MHz	1, 2	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		2	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		2	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		2	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2	-77	
PBCH_RA	dB	1, 2	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				

OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2	17	17
$\hat{E}_s/I_{ot}$ ^{Note5}	dB	1, 2	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2	-87	-87
I _o ^{Note5}	dBm/9MHz	1, 2	-59.13+10log (N _{RB,C} /50)	-59.13+10log (N _{RB,C} /50)
Propagation Condition ^{Note6}		1, 2	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2	1x2 Low	
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].			
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.			
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 5:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 6:	Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].			

Table A.12.4.2.4.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2	1	
TDD configuration		1, 2	TDDConf.1.1 CCA	
BW _{channel}	MHz	1, 2	40: N _{RB,c} = 106	
P _{CCA_DL} for dynamic channel access ^{Note 6,8}		1, 2	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75	
P _{CCA_DL} for semi-static channel access ^{Note 7,8}		1, 2	P _{CCA_DL} =0.9375	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 2	SMTC.1	
DBT window configuration		1, 2	DBT.1	
SSB configuration for semi-static channel access		1, 2	SSB.1 CCA	
SSB configuration for dynamic channel access		1, 2	SSB.2 CCA	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	30	
b2-Threshold2NR	dBm	1, 2	-98	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N _{oc} ^{Note2}	dBm/15kHz	1, 2	-98	

N_{oc} ^{Note2}	dBm/SCS	1, 2	-95	
SS-RSRP ^{Note 3,5}	dBm/SCS	1, 2	-Infinity	-88
$\hat{E}_s/I_{ok}$ ^{Note 5}	dB	1, 2	-Infinity	7
$\hat{E}_s/N_{oc}$ ^{Note 5}	dB	1, 2	-Infinity	7
I_o ^{Note3}	dBm/38.16MHz z	1, 2	-63.95	-56.16
Propagation Condition		1, 2	AWGN	
Antenna Configuration and Correlation Matrix		1, 2,	1x2 Low	
NOTE 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window. NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. NOTE 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. NOTE 5: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows. NOTE 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. NOTE 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. NOTE 8: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

A.12.4.2.4.2 Test Requirements

In test 1, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_irat_cca_with_index}}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_irat_cca_with_index}}$ ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1 and 2, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.12.4.2.5 Void

A.12.4.2.6 Void

A.12.5 Measurement performance

A.12.5.1 E-UTRAN–NR SFTD

A.12.5.1.1 Inter-RAT SFTD accuracy with NR target cell under CCA

A.12.5.1.1.1 Test Purpose

The purpose of this set of tests is to verify that the SFTD measurement accuracy is within the specified limits. This test will verify the requirements as specified in clause 9.1.27 in TS 36.133 [15] for inter-RAT SFTD measurements between E-UTRA PCell and NR target cell under CCA.

A.12.5.1.1.2 Test Environment

Supported test configurations are shown in Table A.12.5.1.1.2-1. In this set of test cases there are two cells on different carriers. Cell 1 is E-UTRAN PCell and Cell 2 is inter-RAT NR target cell under CCA. The test parameters of Cell 1 are given in clause A.12.5.1.1.2-2. The test parameters of Cell 2 are given in Table A.12.5.1.1.2-3. The SFTD between PCell and NR target cell shall be set by the test equipment to one of the time differences in Table A.12.5.1.1.2-4.

Table A.12.5.1.1.2-1: Supported test configurations for SFTD accuracy with NR target cell under CCA

Config	Description
1	LTE FDD NR with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	LTE TDD NR with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.12.5.1.1.2-2: Test parameters for inter-RAT SFTD accuracy with NR target cell under CCA (Cell 1)

Parameter	Unit	Test 1
E-UTRA RF Channel Number		1
Duplex mode		FDD or TDD
TDD special subframe configuration ^{Note1}		6
TDD uplink-downlink configuration ^{Note1}		1
BW _{channel}		5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD 5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD 5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD

OCNG Patterns ^{Note2}		5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD 5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD
PBCH_RA	dB	0
PBCH_RB	dB	
PSS_RA	dB	
SSS_RA	dB	
PCFICH_RB	dB	
PHICH_RA	dB	
PHICH_RB	dB	
PDCCH_RA	dB	
PDCCH_RB	dB	
PDSCH_RA	dB	
PDSCH_RB	dB	
OCNG_RA ^{Note3}	dB	
OCNG_RB ^{Note3}	dB	
N_{oc} ^{Note4}	dBm/15 kHz	-104
$\hat{E}_s/N_{oc}$	dB	-3
$\hat{E}_s/I_{ot}$	dB	-3
RSRP ^{Note5}	dBm/15 kHz	-107
SCH_RP ^{Note5}	dBm/15 kHz	-107
I_o ^{Note5}	dBm/Ch BW	-74.45 +10log ($N_{RB,c}/50$)
Propagation Condition		AWGN
Antenna Configuration		1x2
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23]. Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively. Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 5: E_s/I_{ot} , RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		

Table A.12.5.1.1.2-3: Test parameters for inter-RAT SFTD accuracy with NR target cell under CCA (Cell 2)

Parameter		Unit	Test 1
Duplex mode			TDD
TDD Configuration			TDDConf.1.1 CCA
$BW_{channel}$		MHz	40: $N_{RB,c} = 106$
DL CCA model			As specified in clause A.3.26.2.1
DL CCA probability for semi-static channel access ^{Note6,8}	P_{CCA}		0.75
DL CCA probability for dynamic channel access ^{Note7,8}	$P_{CCA_DL_1}$		0.75
	$P_{CCA_DL_2}$		0.75
SSB configuration for semi-static channel access ^{Note6,8}			SSB.1 CCA

SSB configuration for dynamic channel access ^{Note7,8}		SSB.2 CCA
SMTc configuration		SMTc.1
DBT window configuration		DBT.1
OCNG Patterns		OP.1
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH DMRS		
EPRE ratio of OCNG DMRS to SSS ^{Note1}		
EPRE ratio of OCNG to OCNG DMRS ^{Note1}		
N_{oc} ^{Note2}	dBm/15kHz	-104
N_{oc} ^{Note2}	dBm/SSB SCS	-101
$\hat{E}_s/I_{ot}$	dB	-3
$\hat{E}_s/N_{oc}$	dB	-3
SS-RSRP ^{Note3}	dBm/SCS	-104
I_o ^{Note3}	dBm/38.16 MHz	-68.18
Propagation condition		AWGN
Antenna configuration		1x2
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols in slots with downlink transmission bursts. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 8: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.		

Table A.12.5.1.1.2-4: Timing offsets for inter-RAT SFTD accuracy test with NR target cell under CCA

Configuration	SFN offset between PCell and NR neighbor cell	Frame boundary offset between PCell and NR neighbour cell (Ts)
1	100	-122000
2	300	-60540
3	500	1000
4	700	62540
5	900	124000

A.12.5.1.1.3 Test Requirements

The SFTD reported by the UE consists of 2 elements, SFN offset and frame boundary offset between PCell and inter-RAT NR target cell. The reported SFTD accuracy shall fulfil the requirement in clause 9.1.27 in TS 36.133 [15].

A.12.5.2 Void

A.12.5.3 Void

A.12.5.4 Void

A.12.5.5 Void

A.12.5.6 Void

A.13 NR Standalone Tests with NR SCell under CCA and All Other NR Cells in FR1

A.13.1 Void

A.13.2 Signalling characteristics

A.13.2.1 Void

A.13.2.2 SCell activation and deactivation delay

A.13.2.2.1 SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

A.13.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for SCell on NR-U SCC with CCA are within the requirements stated in clause 8.3A, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 160 ms.

The supported test configurations are shown in Table A.13.2.2.1.1-1.

The test parameters are given in Table A.13.2.2.1.1-2 and cell-specific parameters in Table A.13.2.2.1.1-3 below. The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two carriers, each with one cell: Cell 1 (PCell) on radio channel 1 (PCC) in NR FR1, and Cell2 (SCell) on radio channel 2 (SCC) in NR with CCA. Before the test starts the UE is connected to Cell 1, but is not aware of Cell 2, as the UE is only monitoring the PCC. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on radio channel 2. The UE now starts monitoring the SCC. At the end of T1, the test equipment sends a MAC message for activation of the SCell.

The point in time at which the MAC message is received at the UE antenna connector, in a slot # denoted m , defines the start of time period T2. The UE shall be able to report a valid CSI in PCell for the activated SCell at latest in slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time_withCCA}} + T_{\text{CSI_Reporting_withCCA}}}{\text{NR slot length}}$, as defined in clause 8.3A.2. The UE shall start reporting CSI in PCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $m + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$ and shall report CQI index 0 (out-of-range) until the SCell activation has been completed. Any PCell interruption shall fall within the time window specified in clause 8.3A.2. At the end of T2 the test equipment sends a MAC message for deactivation of the SCell.

The point in time at which the MAC message is received by at the UE antenna connector, in a slot # denoted n , defines the start of time period T3. The UE shall complete the activation at latest in slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{\text{NR slot length}}$. Any PCell interruption shall fall within the time window specified in clause 8.3A.3.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during activation and deactivation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received, while taking into account CCA failures on SCC.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell deactivation command is sent until CQI reporting for SCell is discontinued.

Table A.13.2.2.1.1-1: Supported test configurations for SCell Activation and Deactivation of known SCell under CCA, 160 ms SCell measurement cycle

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode; With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.13.2.2.1.1-2: General test parameters for known SCell activation with SCell under CCA, 160 ms SCell measurement cycle

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two radio channels (1, 2) are used for this test
Active PCell		Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell		Cell 2	Configured deactivated secondary cell on NR RF channel number 2
CP length		Normal	
DRX		OFF	Continuous monitoring of primary cell
CQI/PMI periodicity and offset configuration index		0	CQI reporting for SCell every fourth slot
SCell measurement cycle (measCycleSCell)	ms	160	
Cell2 timing offset to cell1	μs	0	
Time alignment error between cell2 and cell1	μs	≤ TAE as specified in TS 38.104 [13] clause 6.5.3.1.	The value of time alignment error depends upon the type of carrier aggregation.
T1	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	s	1	During this time the UE shall activate the SCell.
T3	s	1	During this time the UE shall deactivate the SCell.
T _{HARQ}	ms	$k_1 \times \text{NR slot length}$	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
T _{CSI_Reporting}	ms	$10 + 5 \cdot 2^{\mu_{DL}}$	the delay (in ms) including uncertainty in acquiring the first available downlink CSI reference resource, UE processing time for CSI reporting (clause 5.2.2.5 in TS 38.214) and uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2] μ_{DL} is the subcarrier spacing configuration for DL

Table A.13.2.2.1.1-3: Cell specific test parameters for known FR1 SCell activation case with SCell under CCA, 160 ms SCell measurement cycle

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Duplex mode	Config 1		FDD			TDD		
	Config 2,3		TDD					
TDD configuration	Config 1		---			TDDConf.1.1 CCA		
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1,2	MHz	10: N _{RB,c} = 52			40: N _{RB,c} = 106		
	Config 3		40: N _{RB,c} = 106					
DL CCA model			---			As specified in clause A.3.26.2.1		
DL CCA probability for semi-static channel access ^{Note5,7}	P _{CCA_DL}		---			0.9357		
DL CCA probability for dynamic channel access ^{Note6,7}	P _{CCA_DL_1}		---			0.75		
	P _{CCA_DL_2}		---			0.75		
P _{CCA_UL}						1		
L _{CCA_DL} ^{Note 8}						2		
W _{CCA_DL} ^{Note 8}		ms				T _{activation_time_withCCA}		
Initial downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Initial uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
Dedicated downlink BWP configuration			DLBWP.0.2			DLBWP.0.2		
Dedicated uplink BWP configuration			ULBWP.0.1			ULBWP.0.1		
TCI state			TCI.State.0			TCI.State.0		
TRS Configuration	Config 1		TRS.1.1 FDD			TRS.1.2 TDD		
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			SR.1.1 CCA		
	Config 2		SR.1.1 TDD					
	Config 3		SR.2.1 TDD					
Dedicated CORESET parameters	Config 1		CCR.1.1 FDD			CCR.1.3 CCA		
	Config 2		CCR.1.1 TDD					
	Config 3		CCR.2.1 TDD					
RMSI CORESET parameters	Config 1		CR.1.1 FDD			CR.1.1 CCA		
	Config 2		CR.1.1 TDD					
	Config 3		CR.2.1 TDD					
OCNG Patterns ^{Note1}			OP.1			OP.1		
SSB Configuration for semi-static channel access ^{Note5,7}	Config 1,2		SSB.1 FR1			SSB.1 CCA		
	Config 3		SSB.2 FR1					
SSB Configuration for dynamic channel access ^{Note6,7}	Config 1,2		SSB.1 FR1			SSB.2 CCA		
	Config 3		SSB.2 FR1					
SMTC configuration			SMTC.1			SMTC.1		
DBT window configuration			---			DBT.1		
EPRE ratio of PSS to SSS		dB	0			0		
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS ^{Note1}								
EPRE ratio of OCNG to OCNG DMRS ^{Note1}								
N _{oc} ^{Note2}	Config 1,2							

	Config 3			
N_{oc} ^{Note2}	Config 1,2	dBm/SCS	-104	-101
	Config 3		-101	
$\hat{E}_s/I_{ot}$		dB	17	17
$\hat{E}_s/N_{oc}$		dB	17	17
SS-RSRP ^{Note3}	Config 1,2	dBm/SCS	-87	-84
	Config 3		-84	-84
I_o ^{Note3}	Config 1,2		-58.96	-52.87
	Config 3		-52.87	-52.87
Propagation condition		-	AWGN	
Note 1: OCNG shall be used such that resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For Cell 2 with CCA model, OCNG is transmitted only in slots with downlink transmission bursts and is not transmitted during muted slots or during DBT windows.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T2.				
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.				
Note 8: As specified in clause 8.3A for $L_{1,max}$, $L_{2,1,max}$, $L_{2,2,max}$, $L_{3,1,max}$, and $L_{3,2,max}$				

A.13.2.2.1.2 Test Requirements

During T2, the UE shall send the first CSI report for SCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $m+1+\frac{T_{HARQ}+3ms}{NR\ slot\ length}$.

During T2, conditioned on that downlink CCA failures L_1 and $L_{2,2}$ experienced in the SCell fulfill $L_1 \leq L_{1,max}$ and $L_{2,2} \leq L_{2,2,max}$ with $L_{1,max} = 2$ and $L_{2,2,max} = 2$, respectively, the UE shall send the first valid CSI report (non-zero CQI) for the SCell no later than slot $m + (T_{HARQ} + T_{activation_time_withCCA} + T_{CSI_Reporting_withCCA})/NR_slot_length$, where $T_{activation_time_withCCA} = T_{FirstSSB} + L_1 * T_{rs} + 5ms$ and $T_{CSI_reporting_withCCA} = T_{CSI_reporting} + L_{2,2} * T_{CSI-RS} + T_{CSI_ReportingDelay}$, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot $m+1+\frac{T_{HARQ}}{NR\ slot\ length}$ to slot $m+1+\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with $T_X = T_{FirstSSB}$.

During T3, interruption on PCell shall not occur outside slot $n+1+T_{HARQ}/NR_slot_length$ to slot $n+1+(T_{HARQ}+3ms)/NR_slot_length$.

The interruption on PCell shall not be more than specified for SA in clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.13.2.2.2 SCell Activation and Deactivation of known SCell under CCA, 640 ms SCell measurement cycle

A.13.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for SCell on NR-U SCC with CCA are within the requirements stated in clause 8.3A, when the SCell is known by the UE at the time of activation and the configured SCell measurement cycle is 640 ms.

The supported test configurations are same as in Table A.13.2.2.1.1-1 above.

The test parameters are same as in Table A.13.2.2.1.1-2 above, except for parameters listed below in Table A.13.2.2.2.1-1. The cell-specific parameters are same as in Table A.13.2.2.1.1-3 above.

The test execution is the same as described in clause A.13.2.2.1 above, except that downlink CCA failures $L_{2,1}$ and $L_{2,2}$ with limits $L_{2,1} \leq L_{2,1,max}$ and $L_{2,2} \leq L_{2,2,max}$ replace L_1 as described in clause 8.3A.2 for activation of known SCell with a measurement cycle larger than 160 ms.

Table A.13.2.2.2.1-1: General test parameters for known SCell activation with SCell under CCA, 640 ms SCell measurement cycle

Parameter	Unit	Value	Comment
SCell measurement cycle (measCycleSCell)	ms	640	

A.13.2.2.2.2 Test Requirements

During T2, the UE shall send the first CSI report for SCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $m+1+\frac{T_{HARQ}+3ms}{NR_slot_length}$.

During T2, conditioned on that downlink CCA failures $L_{2,1}$ and $L_{2,2}$ experienced in the SCell fulfill $L_{2,1} \leq L_{2,1,max}$ and $L_{2,2} \leq L_{2,2,max}$ with $L_{2,1,max} = 2$ and $L_{2,2,max} = 2$, respectively, the UE shall send the first valid CSI report (non-zero CQI) for the SCell no later than slot $m + (T_{HARQ} + T_{activation_time_withCCA} + T_{CSI_Reporting_withCCA})/NR_slot_length$, where $T_{activation_time_withCCA} = T_{FirstSSB_MAX} + L_{2,1} * T_{SMT_MAX} + (1 + L_{2,2}) * T_{rs} + 5ms$ and $T_{CSI_reporting_withCCA} = T_{CSI_reporting} + T_{CSI_ReportingDelay}$, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR_slot_length}$, as defined in clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot $m+1+\frac{T_{HARQ}}{NR_slot_length}$ to slot $m+1+\frac{T_{HARQ}+3+T_X}{NR_slot_length}$ with $T_X = T_{FirstSSB}$.

During T3, interruption on PCell shall not occur outside slot $n+1+T_{HARQ}/NR_slot_length$ to slot $n+1+(T_{HARQ}+3ms)/NR_slot_length$.

The interruption on PCell shall not be more than specified for SA in clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.13.2.2.3 SCell Activation and Deactivation of unknown SCell under CCA

A.13.2.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that SCell activation and deactivation delays for SCell on NR-U SCC with CCA are within the requirements stated in clause 8.3A, when the SCell is unknown to the UE at the time of activation.

The supported test configurations are same as in Table A.13.2.2.1.1-1 above.

The test parameters are same as in Table A.13.2.2.1.1-2 above, except for parameters listed below in Table A.13.2.2.3.1-1. The cell-specific parameters are same as in Table A.13.2.2.1.1-3 above.

The test execution is the same as described in clause A.13.2.2.1 above, except that downlink CCA failures $L_{3,1}$ and $L_{3,2}$ with limits $L_{3,1} \leq L_{3,1,max}$ and $L_{3,2} \leq L_{3,2,max}$ replace L_1 as described in clause 8.3A.2 for activation of unknown SCell.

Table A.13.2.2.3.1-1: General test parameters for unknown SCell activation with SCell under CCA

Parameter	Unit	Value	Comment
T1	s	0.1	During this time period the PCell shall be known and the SCell configured, but not detected.

A.13.2.2.3.2 Test Requirements

During T2, the UE shall send the first CSI report for SCell after at least one CSI-RS transmission occasion for channel measurement and reporting after slot $m+1+\frac{T_{HARQ}+3ms}{NR\ slot\ length}$.

During T2, conditioned on that downlink CCA failures $L_{3,1}$ and $L_{3,2}$ experienced in the SCell fulfill $L_{3,1} \leq L_{3,1,max}$ and $L_{3,2} \leq L_{3,2,max}$ with $L_{3,1,max} = 2$ and $L_{3,2,max} = 2$, respectively, the UE shall send the first valid CSI report (non-zero CQI) for the SCell no later than slot $m + (T_{HARQ} + T_{activation_time_withCCA} + T_{CSI_Reporting_withCCA})/NR_slot_length$, where $T_{activation_time_withCCA} = T_{FirstSSB_MAX} + (1 + L_{3,1}) * T_{SMTC_MAX} + (2 + L_{3,2}) * T_{rs} + 5ms$ and $T_{CSI_reporting_withCCA} = T_{CSI_reporting} + T_{CSI_ReportingDelay}$, as specified in clause 8.3A.2.

During T3, the UE shall stop sending CSI reports for SCell at latest in slot $n + \frac{T_{HARQ}+3ms}{NR\ slot\ length}$, as defined in clause 8.3A.3.

During T2, interruption on PCell shall not occur outside slot $m+1+\frac{T_{HARQ}}{NR\ slot\ length}$ to slot $m+1+\frac{T_{HARQ}+3+T_X}{NR\ slot\ length}$ with $T_X = T_{FirstSSB}$.

During T3, interruption on PCell shall not occur outside slot $n+1+T_{HARQ}/NR_slot_length$ to slot $n+1+(T_{HARQ}+3ms)/NR_slot_length$.

The interruption on PCell shall not be more than specified for SA in clause 8.2.2.2.2.

The rate of correctly observed SCell activation delays and SCell deactivation delays shall for repeated tests be at least 90%.

A.13.2.3 Void

A.13.3 Measurement procedure

A.13.3.1 Intra-frequency measurements

A.13.3.1.1 Event-triggered reporting tests on SCC without gaps under non-DRX

A.13.3.1.1.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.5.1 and 9.2A.5.2.

A.13.3.1.1.2 Test parameters

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table A.13.3.1.1.2-1 and A.13.3.1.1.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

Table A.13.3.1.1.2-1: Supported test configurations

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.3.1.1.2-2: General test parameters for intra-frequency event triggered reporting without gaps

Paramater	Unit	Test Configur ation	Value	Comment
Active PCell		1, 2, 3	Cell 1	
Active SCell		1, 2, 3	Cell 2	
Neighbour cell		1, 2, 3	Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and Cell 3	
DL CCA model			As specified in clause A.3.26.2.1	
UL CCA model			As specified in clause A.3.26.2.2	
DBT window configuration		1, 2, 3	Cell 1: N/A Cell 2,3: DBT.1	
A3-Offset	dB	1, 2, 3	-4.5	
Event A3 measurement quantity			SS-RSRP	

CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
Time offset between Cell 1 and Cell 2		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
<i>deriveSSB-IndexFromCell</i>		1	<i>False</i>	
		2	<i>True</i>	
		3	<i>True</i>	
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

Table A.13.3.1.1.2-3: Cell-specific test parameters for intra-frequency event-triggered reporting without gaps

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		2	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		$P_{CCA_DL}=0.9375$		$P_{CCA_DL}=0.9375$	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
L_{CCA_DL}			Config 1,2,3	Not Applicable		12		12	
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable		$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c} = 52$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
			Config 3	40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
BWP BW		MHz	Config 1,2	10: $N_{RB,c} = 52$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
			Config 3	40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		DLBWP.0.1			
	Initial UL BWP			ULBWP.0.1		ULBWP.0.1			

	Dedicated DL BWP			DLBWP.1.1	DLBWP.1.1	
	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR.1.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR.1.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	As defined in A.3.28.1	As defined in A.3.28.1
SMTc configuration defined in A.3.11			Config 1,2,3	SMTc.1	SMTc.1	SMTc.1
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	15	30	30
			Config 2	15	30	30
			Config 3	30	30	30
EPRE ratio of PSS to SSS			Config 1,2,3	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						

EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} ^{Note2}	dBm/15kHz	Config 1,2,3	-98	-98	-98	-98	-98	-98
N_{oc} ^{Note2}	dBm/SCS	Config 1,2	-98	-95	-95	-95	-95	-95
		Config 3	-95	-95	-95	-95	-95	-95
SS-RSRP ^{Note 3}	dBm/SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
		Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	4	-3.79	-Infinity	1.54
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	4	4	-Infinity	7
I_o ^{Note3}	dBm/ChB W	Config 1,2	-64.59	-64.59	-58.49	-54.64	-58.49	-54.64
	dBm/ChB W	Config 3	-58.49	-58.49	-58.49	-54.64	-58.49	-54.64
Propagation Condition		Config 1,2,3	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.								

A.13.3.1.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_intra_without_index_CCA}}$ ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

$T_{\text{identify_intra_cca_without_index}} = (T_{\text{PSS/SSS_sync_intra_cca}} + T_{\text{SSB_measurement_period_intra_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_intra_cca}}$: it is the time period used in PSS/SSS detection given in table 9.2A.5.1-1.

$T_{\text{SSB_measurement_period_intra_cca}}$: equal to a measurement period of SSB based measurement given in table 9.2A.5.2-1.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TTI}_{\text{DCCH}}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.1.2 Event-triggered reporting tests on SCC without gaps under DRX

A.13.3.1.2.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.5.1 and 9.2A.5.2.

A.13.3.1.2.2 Test parameters

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table A.13.3.1.2.2-1 and A.13.3.1.2.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.13.3.1.2.2-1: Supported test configurations

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.3.1.2.2-2: General test parameters for intra-frequency event triggered reporting without gaps with DRX

Parameter	Unit	Test Configuration	Value		Comment
			Test 1	Test 2	
Active PCell		1, 2, 3	Cell 1		
Active SCell		1, 2, 3	Cell 2		
Neighbour cell		1, 2, 3	Cell 3		Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and Cell 3		
DL CCA model			As specified in clause A.3.26.2.1		
UL CCA model			As specified in clause A.3.26.2.2		
DBT window configuration		1, 2, 3	Cell 1: N/A Cell 2,3: DBT.1		
A3-Offset	dB	1, 2, 3	-4.5		
Event A3 measurement quantity			SS-RSRP		
CP length		1, 2, 3	Normal		
Hysteresis	dB	1, 2, 3	0		
Time To Trigger	s	1, 2, 3	0		
Filter coefficient		1, 2, 3	0		L3 filtering is not used

DRX		1, 2, 3	DRX.1	DRX.2	
Time offset between Cell 1 and Cell 2		1	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s		Synchronous cells
		3	3 μ s		Synchronous cells
<i>deriveSSB-IndexFromCell</i>		1	<i>False</i>		
		2	<i>True</i>		
		3	<i>True</i>		
T1	s	1, 2, 3	5		
T2	s	1, 2, 3	5	20	

Table A.13.3.1.2.2-3: Cell-specific test parameters for intra-frequency event-triggered reporting without gaps

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		2	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		$P_{CCA_DL}=0.9375$		$P_{CCA_DL}=0.9375$	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
L_{CCA_DL}			Config 1,2,3	Not Applicable		12		12	
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable		$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c} = 52$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
			Config 3	40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
BWP BW		MHz	Config 1,2	10: $N_{RB,c} = 52$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
			Config 3	40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		DLBWP.0.1			
	Initial UL BWP			ULBWP.0.1		ULBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1		DLBWP.1.1			

	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR.2.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR.2.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	As defined in A.3.28.1	As defined in A.3.28.1
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing	kHz		Config 1	15	30	30
			Config 2	15	30	30
			Config 3	30	30	30
EPRE ratio of PSS to SSS		Config 1,2,3	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						

EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} ^{Note2}	dBm/15kHz	Config 1,2,3	-98	-98	-98	-98	-98	-98
N_{oc} ^{Note2}	dBm/SCS	Config 1,2	-98	-95	-95	-95	-95	-95
		Config 3	-95	-95	-95	-95	-95	-95
SS-RSRP ^{Note 3}	dBm/SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
		Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	4	-3.79	-Infinity	1.54
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	4	4	-Infinity	7
I_o ^{Note3}	dBm/ChB W	Config 1,2	-64.59	-64.59	-58.49	-54.64	-58.49	-54.64
	dBm/ChB W	Config 3	-58.49	-58.49	-58.49	-54.64	-58.49	-54.64
Propagation Condition		Config 1,2,3	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.								

A.13.3.1.2.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_intra_without_index_CCA}}$ ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

$T_{\text{identify_intra_cca_without_index}} = (T_{\text{PSS/SSS_sync_intra_cca}} + T_{\text{SSB_measurement_period_intra_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_intra_cca}}$: it is the time period used in PSS/SSS detection given in table 9.2A.5.1-1.

$T_{\text{SSB_measurement_period_intra_cca}}$: equal to a measurement period of SSB based measurement given in table 9.2A.5.2-1.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TTI}_{\text{DCCH}}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.1.3 Event-triggered reporting tests on SCC with per-UE gaps under non-DRX

A.13.3.1.3.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.6.1 and 9.2A.6.2.

A.13.3.1.3.2 Test parameters

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table A.13.3.1.3.2-1 and A.13.3.1.3.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There are two BWPs configured in Cell 1, BWP0 which contains the cell defining SSB, and BWP1 which does not contain any SSB of Cell 1. During the whole test, BWP1 is always scheduled as the active BWP for the UE.

Table A.13.3.1.3.2-1: Supported test configurations

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.3.1.3.2-2: General test parameters for intra-frequency event triggered reporting with per-UE gaps

Parameter	Unit	Test Configuration	Value	Comment
Active PCell		1, 2, 3	Cell 1	
Active SCell		1, 2, 3	Cell 2	
Neighbour cell		1, 2, 3	Cell 3	Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and Cell 3	
Measurement gap type		1, 2, 3	Per-UE gaps	
Measurement gap repetition periodicity	ms	1, 2, 3	40	
Measurement gap length	ms	1, 2, 3	6	
Measurement gap offset	ms	1, 2, 3	39	
DL CCA model			As specified in clause A.3.26.2.1	
UL CCA model			As specified in clause A.3.26.2.2	
DBT window configuration		1, 2, 3	Cell 1: N/A Cell 2,3: DBT.1	
CSI-RS parameters in Cell 1		1	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3	-4.5	

Event A3 measurement quantity			SS-RSRP	
CP length		1, 2, 3	Normal	
Hysteresis	dB	1, 2, 3	0	
Time To Trigger	s	1, 2, 3	0	
Filter coefficient		1, 2, 3	0	L3 filtering is not used
DRX		1, 2, 3		OFF
Time offset between Cell 1 and Cell 2		1	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
<i>deriveSSB-IndexFromCell</i>		1	<i>False</i>	
		2	<i>True</i>	
		3	<i>True</i>	
T1	s	1, 2, 3	5	
T2	s	1, 2, 3	5	

Table A.13.3.1.3.2-3: Cell-specific test parameters for intra-frequency event-triggered reporting without gap

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		2	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		$P_{CCA_DL}=0.9375$		$P_{CCA_DL}=0.9375$	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
L_{CCA_DL}			Config 1,2,3	Not Applicable		12		12	
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable		$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c} = 52$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
			Config 3	40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
BWP BW		MHz	Config 1,2	10: $N_{RB,c} = 52$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
			Config 3	40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		DLBWP.0.1			
	Initial UL BWP			ULBWP.0.1		ULBWP.0.1			

	Dedicated DL BWP			DLBWP.1.1	DLBWP.1.1	
	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR.1.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR.1.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	As defined in A.3.28.1	As defined in A.3.28.1
SMTTC configuration defined in A.3.11			Config 1,2,3	SMTTC.1	SMTTC.1	SMTTC.1
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	15	30	30
			Config 2	15	30	30
			Config 3	30	30	30
EPRE ratio of PSS to SSS			Config 1,2,3	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						

EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} ^{Note2}	dBm/15kHz	Config 1,2,3	-98	-98	-98	-98	-98	-98
N_{oc} ^{Note2}	dBm/SCS	Config 1,2	-98	-95	-95	-95	-95	-95
		Config 3	-95	-95	-95	-95	-95	-95
SS-RSRP ^{Note 3}	dBm/SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
		Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	4	-3.79	-Infinity	1.54
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	4	4	-Infinity	7
I_o ^{Note3}	dBm/ChB W	Config 1,2	-64.59	-64.59	-58.49	-54.64	-58.49	-54.64
	dBm/ChB W	Config 3	-58.49	-58.49	-58.49	-54.64	-58.49	-54.64
Propagation Condition		Config 1,2,3	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.								

A.13.3.1.3.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_intra_without_index_CCA}}$ ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

$T_{\text{identify_intra_cca_without_index}} = (T_{\text{PSS/SSS_sync_intra_cca}} + T_{\text{SSB_measurement_period_intra_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_intra_cca}}$: it is the time period used in PSS/SSS detection given in table 9.2A.6.1-1.

$T_{\text{SSB_measurement_period_intra_cca}}$: equal to a measurement period of SSB based measurement given in table 9.2A.6.2-1.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TTI}_{\text{DCCH}}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.1.4 Event-triggered reporting tests on SCC with per-UE gaps under DRX

A.13.3.1.4.1 Test purpose and environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2A.6.1 and 9.2A.6.2.

A.13.3.1.4.2 Test parameters

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). The test parameters for the three cells are given in Table A.13.3.1.4.2-1 and A.13.3.1.4.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the SCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1 and T2, respectively. During time duration T1, the UE shall not have any timing information of Cell 3.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There are two BWPs configured in Cell 1, BWP0 which contains the cell defining SSB, and BWP1 which does not contain any SSB of Cell 1. During the whole test, BWP1 is always scheduled as the active BWP for the UE.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.13.3.1.4.2-1: Supported test configurations

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.3.1.4.2-2: General test parameters for intra-frequency event triggered reporting without gap with DRX

Parameter	Unit	Test Configuration	Value		Comment
			Test 1	Test 2	
Active PCell		1, 2, 3	Cell 1		
Active SCell		1, 2, 3	Cell 2		
Neighbour cell		1, 2, 3	Cell 3		Cell to be identified.
RF Channel Number		1, 2, 3	1: Cell 1 2: Cell 2 and Cell 3		
Measurement gap type		1, 2, 3	Per-UE gaps		
Measurement gap repetition periodicity	ms	1, 2, 3	40		
Measurement gap length	ms	1, 2, 3	6		
Measurement gap offset	ms	1, 2, 3	39		
DL CCA model			As specified in clause A.3.26.2.1		
UL CCA model			As specified in clause A.3.26.2.2		
DBT window configuration		1, 2, 3	Cell 1: N/A Cell 2,3: DBT.1		

CSI-RS parameters in Cell 1		1	CSI-RS.1.2 FDD resource #0		
		2	CSI-RS.1.2 TDD resource #0		
		3	CSI-RS.2.2 TDD resource #0		
A3-Offset	dB	1, 2, 3	-4.5		
Event A3 measurement quantity			SS-RSRP		
CP length		1, 2, 3	Normal		
Hysteresis	dB	1, 2, 3	0		
Time To Trigger	s	1, 2, 3	0		
Filter coefficient		1, 2, 3	0		L3 filtering is not used
DRX		1, 2, 3	DRX.1	DRX.2	
Time offset between Cell 1 and Cell 2		1	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s		Synchronous cells
		3	3 μ s		Synchronous cells
<i>deriveSSB-IndexFromCell</i>		1	<i>False</i>		
		2	<i>True</i>		
		3	<i>True</i>		
T1	s	1, 2, 3	5		
T2	s	1, 2, 3	5	20	

Table A.13.3.1.4.2-3: Cell-specific test parameters for intra-frequency event-triggered reporting without gap

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		2	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		$P_{CCA_DL}=0.9375$		$P_{CCA_DL}=0.9375$	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
L_{CCA_DL}			Config 1,2,3	Not Applicable		12		12	
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable		$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c} = 52$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
			Config 3	40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	

BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52	40: N _{RB,c} = 106	40: N _{RB,c} = 106
			Config 3	40: N _{RB,c} = 106	40: N _{RB,c} = 106	40: N _{RB,c} = 106
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1	DLBWP.0.1	
	Initial UL BWP			ULBWP.0.1	ULBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	DLBWP.1.1	
	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR2.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR2.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	As defined in A.3.28.1	As defined in A.3.28.1
SMTC configuration defined in A.3.11			Config 1,2,3	SMTC.1	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	15	30	30
			Config 2	15	30	30
			Config 3	30	30	30
EPRE ratio of PSS to SSS			Config 1,2,3	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						

EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} ^{Note2}	dBm/15kHz	Config 1,2,3	-98		-98		-98	
N_{oc} ^{Note2}	dBm/SCS	Config 1,2	-98		-95		-95	
		Config 3	-95		-95		-95	
SS-RSRP ^{Note 3}	dBm/SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
		Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3	4	4	4	-3.79	-Infinity	1.54
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	4	4	-Infinity	7
I_o ^{Note3}	dBm/ChBW	Config 1,2	-64.59	-64.59	-58.49	-54.64	-58.49	-54.64
	dBm/ChBW	Config 3	-58.49	-58.49	-58.49	-54.64	-58.49	-54.64
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.								

A.13.3.1.4.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_intra_without_index_CCA}}$ ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

$T_{\text{identify_intra_cca_without_index}} = (T_{\text{PSS/SSS_sync_intra_cca}} + T_{\text{SSB_measurement_period_intra_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_intra_cca}}$: it is the time period used in PSS/SSS detection given in table 9.2A.6.1-1.

$T_{\text{SSB_measurement_period_intra_cca}}$: equal to a measurement period of SSB based measurement given in table 9.2A.6.2-1.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TTI_DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.1.5 Void

A.13.3.1.6 Void

A.13.3.2 Inter-frequency measurements

A.13.3.2.1 Void

A.13.3.2.2 Void

A.13.3.2.3 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is not used

A.13.3.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements for NR cell with CCA in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 as SCell in FR1 with CCA on NR RF channel 2 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 3. The test parameters are given in Tables A.13.3.2.3.1-1, A.13.3.2.3.1-2 and A.13.3.2.3.1-3.

In this test, measurement gap pattern configuration # 0 as defined in Table A.13.3.2.3.1-2 is provided

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.13.3.2.3.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, NR cell without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.13.3.2.3.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
NR RF Channel Number		Config 1,2,3	1, 2, 3	Three FR1 NR carrier frequencies are used. Channels 2 and 3 are with CCA.
Active cells		Config 1,2,3	NR cell 1 (PCell), NR cell 2 with CCA (SCell)	NR cell 1 is on NR RF channel number 1. NR cell 2 is on NR RF channel number 2 with CCA.

Neighbour cell		Config 1,2,3	NR cell 3 with CCA	NR cell 3 is on NR RF channel number 3 with CCA.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1	
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2	
Gap Pattern Id		Config 1,2,3	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3µs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1.7	

Table A.13.3.2.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		$P_{CCA_DL}=0.9375$		$P_{CCA_DL}=0.9375$	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
L_{CCA_DL}			Config 1,2,3	Not Applicable		12		12	
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable		$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c} = 52$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
			Config 3	40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
BWP BW		MHz	Config 1,2	10: $N_{RB,c} = 52$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
			Config 3	40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	

BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1	DLBWP.0.1	
	Initial UL BWP			ULBWP.0.1	ULBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	DLBWP.1.1	
	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR2.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR2.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	As defined in A.3.28.1	As defined in A.3.28.1
SMTc configuration defined in A.3.11			Config 1,2,3	SMTc.1	SMTc.1	SMTc.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	15	30	30
			Config 2	15	30	30
			Config 3	30	30	30
EPRE ratio of PSS to SSS			Config 1,2,3	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						

EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} ^{Note2}	dBm/15kHz	Config 1,2,3	-98		-98		-98	
N_{oc} ^{Note2}	dBm/SCS	Config 1,2	-98		-95		-95	
		Config 3	-95		-95		-95	
SS-RSRP ^{Note 3}	dBm/SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
	SCS	Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	4	4	-Infinity	7
I_o ^{Note3}	dBm/ChBW	Config 1,2	-64.59	-64.59	-58.49	-58.49	-63.94	-56.15
	dBm/ChBW	Config 3	-58.49	-58.49	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.								

A.13.3.2.3.2 Test Requirements

In this test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{identify_inter_cca_without_index}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

The UE is not required to report SSB time index.

$T_{identify_inter_cca_without_index} = (T_{PSS/SSS_sync_inter_cca} + T_{SSB_measurement_period_inter_cca})$ ms, where

$T_{PSS/SSS_sync_inter_cca}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{SSB_measurement_period_inter_cca}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

For test 1, MGRP = 40 ms and for test 2 MGRP = 20 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.2.4 Event triggered reporting tests for FR1 with CCA without SSB time index detection when DRX is used

A.13.3.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 as SCell in FR1 with CCA on NR RF channel 2 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 3. The test parameters are given in Tables A.13.3.2.4.1-1, A.13.3.2.4.1-2 and A.13.3.2.4.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.13.3.2.4.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.13.3.2.4.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode, NR cell without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.13.3.2.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2, 3		Three FR1 NR carrier frequencies are used. Channels 2 and 3 are with CCA.
Active cells		Config 1,2,3	NR cell 1 (PCell), NR cell 2 with CCA (SCell)		NR cell 1 is on NR RF channel number 1. NR cell 2 is on NR RF channel number 2 with CCA.
Neighbour cell		Config 1,2,3	NR cell 3 with CCA		NR cell 3 is on NR RF channel number 3 with CCA.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1		

UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2,3	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.1	DRX.2	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,2,3	3 μ s		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	2.5	17	

Table A.13.3.2.4.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
TDD configuration			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P_{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		$P_{CCA_DL}=0.9375$		$P_{CCA_DL}=0.9375$	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$		$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$	
UL CCA probability P_{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable		$P_{CCA_UL}=1$		$P_{CCA_UL}=1$	
L_{CCA_DL}			Config 1,2,3	Not Applicable		5		5	
W_{CCA_DL}		ms	Config 1,2,3	Not Applicable		$T_{PSS/SSS_sync_inter_cca}$		$T_{PSS/SSS_sync_inter_cca}$	
$BW_{channel}$		MHz	Config 1,2	10: $N_{RB,c} = 52$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
			Config 3	40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
BWP BW		MHz	Config 1,2	10: $N_{RB,c} = 52$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
			Config 3	40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$		40: $N_{RB,c} = 106$	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		DLBWP.0.1			
	Initial UL BWP			ULBWP.0.1		ULBWP.0.1			

	Dedicated DL BWP			DLBWP.1.1	DLBWP.1.1	
	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR.1.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR.1.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	As defined in A.3.28.1	As defined in A.3.28.1
SMT-C configuration defined in A.3.11			Config 1,2,3	SMT-C.1	SMT-C.1	SMT-C.4
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	15	30	30
			Config 2	15	30	30
			Config 3	30	30	30
EPRE ratio of PSS to SSS			Config 1,2,3	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						

EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	dBm/15kHz	Config 1,2,3	-98	-98	-98	-98	-98	-98
N_{oc} Note2	dBm/SCS	Config 1,2	-98	-98	-95	-95	-95	-95
		Config 3	-95	-95	-95	-95	-95	-95
SS-RSRP Note 3	dBm/SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
		Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	4	4	-Infinity	7
I_o Note3	dBm/ChB W	Config 1,2	-64.59	-64.59	-58.49	-58.49	-63.94	-56.15
	dBm/ChB W	Config 3	-58.49	-58.49	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.								

Table A.13.3.2.4.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3 Value	Test2&4 Value	Comment
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.13.3.2.4.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.13.3.2.4.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_without_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_without_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

$T_{\text{identify_inter_cca_without_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

For test 1 DRX cycle = 40 ms and for test 2 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TTI}_{\text{DCCH}}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.2.5 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is not used

A.13.3.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 as SCell in FR1 with CCA on NR RF channel 2 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 3. The test parameters are given in Tables A.13.3.2.5.1-1, A.13.3.2.5.1-2 and A.13.3.2.5.1-3.

Measurement gap pattern configuration # 0 as defined in Table A.13.3.2.5.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

Table A.13.3.2.5.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode,

	NR cell without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations

Table A.13.3.2.5.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
NR RF Channel Number		Config 1,2,3	1, 2, 3	Three FR1 NR carrier frequencies are used. Channels 2 and 3 are with CCA.
Active cells		Config 1,2,3	NR cell 1 (PCell), NR cell 2 with CCA (SCell)	NR cell 1 is on NR RF channel number 1. NR cell 2 is on NR RF channel number 2 with CCA.
Neighbour cell		Config 1,2,3	NR cell 3 with CCA	NR cell 3 is on NR RF channel number 3 with CCA.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1	
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2	
Gap Pattern Id		Config 1,2,3	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	2	

Table A.13.3.2.5.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P _{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P _{CCA_DL} =0.9375		P _{CCA_DL} =0.9375	

	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75
UL CCA probability P _{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable	P _{CCA_UL} =1	P _{CCA_UL} =1
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable	P _{CCA_UL} =1	P _{CCA_UL} =1
L _{CCA_DL}			Config 1,2,3	Not Applicable	5	5
W _{CCA_DL}		ms	Config 1,2,3	Not Applicable	T _{PSS/SSS_sync_inter_cca}	T _{PSS/SSS_sync_inter_cca}
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52	40: N _{RB,c} = 106	40: N _{RB,c} = 106
			Config 3	40: N _{RB,c} = 106	40: N _{RB,c} = 106	40: N _{RB,c} = 106
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52	40: N _{RB,c} = 106	40: N _{RB,c} = 106
			Config 3	40: N _{RB,c} = 106	40: N _{RB,c} = 106	40: N _{RB,c} = 106
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1	DLBWP.0.1	
	Initial UL BWP			ULBWP.0.1	ULBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	DLBWP.1.1	
	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR.2.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR.2.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	As defined in A.3.28.1	As defined in A.3.28.1
SMTc configuration defined in A.3.11			Config 1,2,3	SMTc.1	SMTc.1	SMTc.4

PDSCH/PDCCH subcarrier spacing	kHz	Config 1	15		30		30	
		Config 2	15		30		30	
		Config 3	30		30		30	
EPRE ratio of PSS to SSS		Config 1,2,3	0		0		0	
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} ^{Note2}	dBm/15kHz	Config 1,2,3	-98		-98		-98	
N_{oc} ^{Note2}	dBm/SCS	Config 1,2	-98		-95		-95	
		Config 3	-95		-95		-95	
SS-RSRP ^{Note 3}	dBm/SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
		Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	4	4	-Infinity	7
I_o ^{Note3}	dBm/ChBW	Config 1,2	-64.59	-64.59	-58.49	-58.49	-63.94	-56.15
	dBm/ChBW	Config 3	-58.49	-58.49	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.								
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.								
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.								
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration								

A.13.3.2.5.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_with_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In this test UE is required to report SSB time index.

$T_{\text{identify_inter_cca_with_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}} + T_{\text{SSB_time_index_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_time_index_inter_cca}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{\text{TTI}_{\text{DCCH}}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.2.6 Event triggered reporting tests for FR1 with CCA with SSB time index detection when DRX is used

A.13.3.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4 and 9.3A.5.

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1, NR cell 2 as SCell in FR1 with CCA on NR RF channel 2 and NR cell 3 as neighbour cell in FR1 with CCA on NR RF channel 3. The test parameters are given in Tables A.13.3.2.6.1-1, A.13.3.2.6.1-2 and A.13.3.2.6.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.13.3.2.6.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 3.

UE needs to be provided at least once every 500 ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.13.3.2.6.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1 with CCA

Config	Description
1	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR cell without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR cell with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode,

	NR cell without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note 1:	The UE is only required to be tested in one of the supported test configurations

Table A.13.3.2.6.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3	1, 2, 3		Three FR1 NR carrier frequencies are used. Channels 2 and 3 are with CCA.
Active cells		Config 1,2,3	NR cell 1 (PCell), NR cell 2 with CCA (SCell)		NR cell 1 is on NR RF channel number 1. NR cell 2 is on NR RF channel number 2 with CCA.
Neighbour cell		Config 1,2,3	NR cell 3 with CCA		NR cell 3 is on NR RF channel number 3 with CCA.
DL CCA model		Config 1,2,3	As specified in clause A.3.26.2.1		
UL CCA model		Config 1,2,3	As specified in clause A.3.26.2.2		
Gap Pattern Id		Config 1,2,3	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	9		
A3-Offset	dB	Config 1,2,3	-6		
Hysteresis	dB	Config 1,2,3	0		
CP length		Config 1,2,3	Normal		
TimeToTrigger	s	Config 1,2,3	0		
Filter coefficient		Config 1,2,3	0		L3 filtering is not used
DRX		Config 1,2,3	DRX.1	DRX.2	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	3	20	

Table A.13.3.2.6.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with CCA with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3	1		2		3	
Duplex mode			Config 1	FDD		TDD		TDD	
			Config 2,3	TDD		TDD		TDD	
			Config 1	Not Applicable		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 2	TDDConf.1.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
			Config 3	TDDConf.2.1		TDDConf.1.1 CCA		TDDConf.1.1 CCA	
DL CCA probability P _{CCA_DL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable		P _{CCA_DL} =0.9375		P _{CCA_DL} =0.9375	

	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75
UL CCA probability P _{CCA_UL}	Semi-static channel access Note 5,7		Config 1,2,3	Not Applicable	P _{CCA_UL} =1	P _{CCA_UL} =1
	Dynamic channel access Note 6,7		Config 1,2,3	Not Applicable	P _{CCA_UL} =1	P _{CCA_UL} =1
L _{CCA_DL}			Config 1,2,3	Not Applicable	2	2
W _{CCA_DL}		ms	Config 1,2,3	Not Applicable	T _{PSS/SSS_sync_inter_cca}	T _{PSS/SSS_sync_inter_cca}
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52	40: N _{RB,c} = 106	40: N _{RB,c} = 106
			Config 3	40: N _{RB,c} = 106	40: N _{RB,c} = 106	40: N _{RB,c} = 106
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52	40: N _{RB,c} = 106	40: N _{RB,c} = 106
			Config 3	40: N _{RB,c} = 106	40: N _{RB,c} = 106	40: N _{RB,c} = 106
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1	DLBWP.0.1	
	Initial UL BWP			ULBWP.0.1	ULBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	DLBWP.1.1	
	Dedicated UL BWP			ULBWP.1.1	ULBWP.1.1	
TRS configuration			Config 1	TRS.1.1 FDD	TRS.1.2 TDD	
			Config 2	TRS.1.1 TDD	TRS.1.2 TDD	
			Config 3	TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1	OP.1	OP.1
PDSCH Reference measurement channel			Config 1	SR.1.1 FDD	SR.1.1 CCA	
			Config 2	SR.1.1 TDD	SR.1.1 CCA	
			Config 3	SR.2.1 TDD	SR.1.1 CCA	
CORESET Reference Channel			Config 1	CR.1.1 FDD	CR.1.1 CCA	
			Config 2	CR.1.1 TDD	CR.1.1 CCA	
			Config 3	CR.2.1 TDD	CR.1.1 CCA	
SSB parameters	Semi-static channel Note 5,7		Config 1	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 2	SSB.1 FR1	SSB.1 CCA	SSB.1 CCA
			Config 3	SSB.2 FR1	SSB.1 CCA	SSB.1 CCA
	Dynamic channel Access Note 6,7		Config 1	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 2	SSB.1 FR1	SSB.2 CCA	SSB.2 CCA
			Config 3	SSB.2 FR1	SSB.2 CCA	SSB.2 CCA
DBT window configuration			Config 1,2,3	Not Applicable	As defined in A.3.28.1	As defined in A.3.28.1
SMTc configuration defined in A.3.11			Config 1,2,3	SMTc.1	SMTc.1	SMTc.4

PDSCH/PDCCH subcarrier spacing	kHz	Config 1	15		30		30	
		Config 2	15		30		30	
		Config 3	30		30		30	
EPRE ratio of PSS to SSS		Config 1,2,3	0		0		0	
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} ^{Note2}	dBm/15kHz	Config 1,2,3	-98		-98		-98	
N_{oc} ^{Note2}	dBm/SCS	Config 1,2	-98		-95		-95	
		Config 3	-95		-95		-95	
SS-RSRP ^{Note 3}	dBm/SCS	Config 1,2	-94	-94	-91	-91	-Infinity	-88
		Config 3	-91	-91	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	4	4	-Infinity	7
I_o ^{Note3}	dBm/ChB W	Config 1,2	-64.59	-64.59	-58.49	-58.49	-63.94	-56.15
	dBm/ChB W	Config 3	-58.49	-58.49	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.								
Note 5: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.								
Note 6: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.								
Note 7: For UE supporting both semi-static and dynamic channel access, the UE must be tested under dynamic channel access configuration.								

Table A.13.3.2.6.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1	Test2	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.13.3.2.6.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.13.3.2.6.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_with_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%. In test 2 with per-FR gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $T_{\text{identify_inter_cca_with_index}}$ from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is required to report SSB time index.

$T_{\text{identify_inter_cca_with_index}} = (T_{\text{PSS/SSS_sync_inter_cca}} + T_{\text{SSB_measurement_period_inter_cca}} + T_{\text{SSB_time_index_inter_cca}})$ ms, where

$T_{\text{PSS/SSS_sync_inter_cca}}$: it is the time period used in PSS/SSS detection given in table 9.3A.4-1.

$T_{\text{SSB_time_index_inter_cca}}$: it is the time period used to acquire the index of the SSB being measured given in table 9.3A.4-2.

$T_{\text{SSB_measurement_period_inter_cca}}$: equal to a measurement period of SSB based measurement given in table 9.3A.5-1.

MGRP = 40 ms.

For test 1 DRX cycle = 40 ms and for test 2 DRX cycle = 640 ms.

SMTC period = 20 ms.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.3 L1-RSRP measurements for beam reporting

A.13.3.3.1 SSB based L1-RSRP measurement when DRX is not used

A.13.3.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.13.3.3.1.1-1.

Table A.13.3.3.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations

A.13.3.3.1.2 Test parameters

There are two cells in the tests, FR1 PCell (Cell 1) and FR1 SCell (Cell 2). Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 and Cell 2 are given in Table A.13.3.3.1.2-1 and Table A.13.3.3.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.13.3.3.1.2-1: General test parameters

Parameter	Config	Unit	Value	
			Cell 1	Cell 2
Active PCell/SCell Configuration			PCell	SCell
RF Channel Number			1	2
DL CCA model	1~3		N/A	As specified in A.3.26.2.1
UL CCA model	1~3		N/A	As specified in A.3.26.2.2
Duplex mode	1		FDD	TDD
	2		TDD	
	3		TDD	
TDD Configuration	1		N/A	TDDConf.1.1 CCA
	2		TDDConf.1.1	
	3		TDDConf.2.1	
BW _{channel}	1	MHz	10: N _{RB,c} = 52	40: N _{RB,c} = 106
	2		10: N _{RB,c} = 52	
	3		40: N _{RB,c} = 106	

PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 CCA
	2		SR.1.1 TDD	
	3		SR.2.1 TDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 CCA
	2		CR.1.1 TDD	
	3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 CCA
	2		CCR.1.1 TDD	
	3		CCR.2.1 TDD	
SSB configuration	1		SSB.3 FR1	SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
	2		SSB.3 FR1	
	3		SSB.4 FR1	
OCNG Patterns	1~3		OP.1	OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTc configuration	1~3		SMTc.1	N/A
DBT Window Configuration	1~3		N/A	DBT.1
TRS Configuration	1		TRS.1.1 FDD	TRS.1.2 TDD
	2		TRS.1.1 TDD	
	3		TRS.1.2 TDD	
DRX configuration	1~3		Off	Off
reportConfigType	1~3		periodic	periodic
reportQuantity	1~3		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1~3		2	2
L1-RSRP reporting period	1~3	slot	80	80
T1	1~3	s	5	5
T2	1~3	s	1	1
EPRE ratio of PSS to SSS	1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Propagation condition	1~3		AWGN	AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.				

Table A.13.3.3.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
DL CCA Probability P_{CCA_DL} Note 4,6	1,2,3		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4,7	1,2,3		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1,2,3		1.0	1.0	1.0	1.0
N_{oc} Note2	1,2,3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,3	dBm/SSB SCS	-91.65			
$\hat{E}_s/I_{ot}$	1,2,3	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2,3	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
I_o Note3	1,2,3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s/N_{oc}$	1,2,3	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy. Note 5: The signal levels apply for SSS Res when the discovery burst is transmitted during DBT windows. Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.						

A.13.3.3.1.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

NOTE: The actual overall delays measured in the test may be up to 2xTTI DCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.3.3.2 SSB based L1-RSRP measurement when DRX is used

A.13.3.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5A.4.1, with the testing configurations for NR cells in Table A.13.3.3.1.1-1.

Table A.13.3.3.2.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.13.3.3.2.2 Test parameters

There are two cells in the tests, FR1 Pcell (Cell 1) and FR1 Scell (Cell 2). Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model. The test parameters and applicability for Cell 1 and Cell 2 are given in Table A.13.3.3.2.2-1 and Table A.13.3.3.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The UE transmits the reporting according to UL CCA model. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.13.3.3.2.2-1: General test parameters

Parameter	Config	Unit	Value	
			Cell 1	Cell 2
Active Pcell/Scell Configuration			Pcell	Scell
RF Channel Number			1	2
DL CCA model	1~3		N/A	As specified in A.3.26.2.1
UL CCA model	1~3		N/A	As specified in A.3.26.2.2
Duplex mode	1		FDD	TDD
	2		TDD	
	3		TDD	
TDD Configuration	1		N/A	TDDConf.1.1 CCA
	2		TDDConf.1.1	
	3		TDDConf.2.1	
BW _{channel}	1	MHz	10: N _{RB,c} = 52	40: N _{RB,c} = 106
	2		10: N _{RB,c} = 52	
	3		40: N _{RB,c} = 106	
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 CCA
	2		SR.1.1 TDD	

RMSI CORESET Reference Channel	3		SR.2.1 TDD	CR.1.1 CCA
	1		CR.1.1 FDD	
	2		CR.1.1 TDD	
	3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 CCA
	2		CCR.1.1 TDD	
	3		CCR.2.1 TDD	
SSB configuration	1		SSB.3 FR1	SSB.3 CCA for semi-static channel access SSB.4 CCA for dynamic channel access
	2		SSB.3 FR1	
	3		SSB.4 FR1	
OCNG Patterns	1~3		OP.1	OP.1
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~3		SMTC.1	N/A
DBT Window Configuration	1~3		N/A	DBT.1
TRS Configuration	1		TRS.1.1 FDD	TRS.1.2 TDD
	2		TRS.1.1 TDD	
	3		TRS.1.2 TDD	
DRX configuration	1~3		DRX.3	DRX.3
reportConfigType	1~3		periodic	periodic
reportQuantity	1~3		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1~3		2	2
L1-RSRP reporting period	1~3	slot	80	80
T1	1~3	s	5	5
T2	1~3	s	1	1
EPRE ratio of PSS to SSS	1~3	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Propagation condition	1~3		AWGN	AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.				

Table A.13.3.3.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2

DL CCA Probability P_{CCA_DL} Note 4,6	1,2,3		0.9375	0.9375	0.9375	0.9375
DL CCA Probability P_{CCA_DL} Note 4,7	1,2,3		0.75/0.75	0.75/0.75	0.75/0.75	0.75/0.75
UL CCA probability P_{CCA_UL}	1,2,3		1.0	1.0	1.0	1.0
N_{oc} Note2	1,2,3	dBm/15kHz	-94.65			
N_{oc} Note2	1,2,3	dBm/SSB SCS	-91.65			
$\hat{E}_s/I_{ot}$	1,2,3	dB	0	0	-Infinity	3
SSB RSRP Note3	1,2,3	dBm/SSB SCS	-91.65	-91.65	-Infinity	-88.65
I_o Note3	1,2,3	dBm/38.16 MHz	-57.59	-57.59	-60.61	-55.84
$\hat{E}_s/N_{oc}$	1,2,3	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: DL and UL CCA probabilities apply for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy. Note 5: The signal levels apply for SSS Res when the discovery burst is transmitted during DBT windows. Note 6: For UE supporting semi-static channel access and network configuring semi-static channel occupancy. Note 7: For UE supporting dynamic channel access and network configuring dynamic channel occupancy. The first value corresponds P_{CCA_DL1} and the second value corresponds to the P_{CCA_DL2}.						

A.13.3.3.2.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640 ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall send L1-RSRP report of both SSB0 and SSB1 in Cell 2.

NOTE: The actual overall delays measured in the test may be up to 2xTTI DCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.13.4 Measurement performance

A.13.4.1 SS-RSRP

A.13.4.1.1 Intra-frequency measurement accuracy on a carrier frequency with CCA

A.13.4.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy on the carrier frequency with CCA is within the specified limits. This test will verify the requirements in clauses 10.1.36.1.1 and 10.1.36.1.2 for intra-frequency measurements under CCA.

A.13.4.1.1.2 Test parameters

Three cells are deployed in the test, which are FR1 PCell (Cell 1), and two cells on the same carrier frequency with CCA and transmit SSBs in DBT windows according to DL CCA model: SCell (Cell 2) and a neighbour cell (Cell 3). Supported test configurations are shown in table A.13.4.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.13.4.1.1.2-2.

Table A.13.4.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Config	Description
1	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR carrier with CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode NR carrier without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations for each supported band	

Table A.13.4.1.1.2-2: SS-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3	Cell 2	Cell 3
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
DL CCA model			As specified in clause A.3.26.2.1					
UL CCA model			As specified in clause A.3.26.2.2					
P _{CCA_DL} for dynamic channel access ^{Note 7,9}			P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75					
P _{CCA_DL} for semi-static channel access ^{Note 8,9}			P _{CCA_DL} =0.9375					
P _{CCA_UL}			1					
TDD configuration	Config 1,2,3		TDDConf.1.1 CCA					
BW _{channel}	Config 1,2,3	MHz	40: N _{RB,c} = 106					
BWP BW	Config 1,2,3		40: N _{RB,c} = 106					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1,2,3		TRS.1. 2 TDD	NA	TRS.1 .2 TDD	NA	TRS.1. 2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,2,3		SR.1.1 CCA	-	SR.1.1 CCA	-	SR.1.1 CCA	-
RMSI CORESET Reference Channel	Config 1,2,3		CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-

Control channel RMC		Config 1,2,3		CR.1.1 CCA	-	CR.1.1 CCA	-	CR.1.1 CCA	-
SSB configuration for semi-static channel access		Config 1,2,3		SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA	SSB.1 CCA
SSB configuration for dynamic channel access		Config 1,2,3		SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA	SSB.2 CCA
DBT window configuration		Config 1,2,3		DBT.1	DBT.1	DBT.1	DBT.1	DBT.1	DBT.1
Time offset with Cell 1		Config 1,2,3	μs	-	3	-	3	-	3
SMTC configuration		Config 1,2,3		SMTC.1					
OCNG Patterns				OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing		Config 1,2,3	kHz	30 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} ^{Note2}	Config 1,2,3	NR_CCA_FR1_I	dBm/SCS	Not applicable ^{Note 5}		-94		-110	
		NR_CCA_FR1_J						-109.5	
N_{oc} ^{Note2}	Config 1,2,3	NR_CCA_FR1_I		Not applicable ^{Note 5}		-91		-107.0	
		NR_CCA_FR1_J	-106.5						
$\hat{E}_s/I_{ot}$ ^{Note6}			dB	2.46	-5.97	2.46	-5.97	-2.01	-3.54
$\hat{E}_s/N_{oc}$ ^{Note6}			dB	6	1	6	1	1	0
SS-RSRP ^{Not e3,6}	Config 1,2,3	NR_TDD_FR1_I	dBm/SCS	Not applicable ^{Note 5}	Not applicable ^{Not e 5}	-85	-90	-	-
								106.00	107.00
								-	-
								105.50	106.50
I_o ^{Note3}	Config 1,2,3	NR_CCA_FR1_I	dBm/38.16MHz	Not applicable ^{Note 5}		-51.99		-70.82	
		NR_CCA_FR1_J						-70.32	
Propagation condition			-	AWGN					
Antenna configuration				1x2					
NOTE 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.									
NOTE 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.									
NOTE 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.									
NOTE 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.									
NOTE 5: Subtest 1 is not used when testing with 30kHz SSB SCS.									
NOTE 6: The signal levels apply for SSS REs when the discovery burst is transmitted during DBT windows.									
NOTE 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.									
NOTE 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.									
NOTE 9: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.									

A.13.4.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for cell 2 and cell 3 shall fulfil absolute requirement in clause 10.1.36.1.1 and relative requirement in clause 10.1.36.1.2.

A.13.4.2 SS-RSRQ

A.13.4.2.1 Intra-frequency measurement accuracy on SCC

A.13.4.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.29.1.1.

A.13.4.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.13.4.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is tested by using the parameters in Table A.13.4.2.1.2-2 and Table A.13.4.2.1.2-3. In all test cases, Cell 1 is the PCell, Cell 2 is the SCell with CCA, and Cell 3 is the target cell with CCA. Three sub-tests (Test 1, Test 2, and Test 3) are provided different N_{oc} on Cells 1, 2, and 3.

Table A.13.4.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.13.4.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 3	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq2	freq2	freq2	freq2
DL CCA model	Config 1, 2, 3		As specified in clause A.3.26.2.1			
UL CCA model	Config 1, 2, 3		As specified in clause A.3.26.2.2			
DL CCA probability for semi-static channel access ^{Note 7, 8}	P_{CCA_UL}		1.0	-	1.0	-
	P_{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access ^{Note 8, 9}	$P_{CCA_DL_1}$		0.75	-	0.75	-
	$P_{CCA_DL_2}$		0.75	-	0.75	-
Duplex mode	Config 1, 2, 3		TDD			
TDD configuration	Config 1, 2, 3		TDDConf.1.1 CCA			
$BW_{channel}$	Config 1, 2, 3	MHz	40: $N_{RB,c} = 106$			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
DRX Cycle		ms	Not Applicable			

PDSCH Reference measurement channel	Config 1, 2, 3		SR.1.1 CCA		SR.1.1 CCA		
RMSI CORESET Reference Channel	Config 1, 2, 3		CR.1.1 CCA		CR.1.1 CCA		
Control Channel RMC	Config 1, 2, 3		CCR.1.1 CCA		CCR.1.1 CCA		
TRS configuration	Config 1, 2, 3		TRS.1.2 TDD		TRS.1.2 TDD		
OCNG Patterns			OP. 1				
SS-RSSI-Measurement			Not Applicable				
Time offset with Cell 1	Config 1, 2, 3	μs	3	3	3	3	
DBT Window Configuration	Config 1, 2, 3		DBT.1				
SSB configuration	Config 1, 2, 3		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access				
SMTC configuration	Config 1, 2, 3		SMTC.1				
CSI-RS for tracking	Config 1, 2, 3		TRS.1.2 TDD				
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 3	kHz	30kHz				
EPRE ratio of PSS to SSS		dB	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}	Config 1, 2, 3	NR_CCA_FR1_I	dBm/15kHz	-91	-110		
		NR_CCA_FR1_J			-109.5		
N_{oc}^{Note2}	Config 1, 2, 3	NR_CCA_FR1_I	dBm/SCS	-88	-107		
		NR_CCA_FR1_J			-106.5		
$\hat{E}_s / I_{ot}$		dB	-1.76		-5.46	-5.46	
$\hat{E}_s / N_{oc}$		dB	3	3	-4	-4	
SS-RSRP ^{Note3}	Config 1, 2, 3	NR_CCA_FR1_I	dBm/SCS	-85	-85	-111	-111
		NR_CCA_FR1_J				-110.5	-110.5
SS-RSRQ ^{Note3}		NR_CCA_FR1_I NR_CCA_FR1_J	dB	-14.77	-14.77	-17.34	-17.34
Io ^{Note3}	Config 1, 2, 3	NR_CCA_FR1_I	dBm/ 38.16MHz	-50	-73.4		-73.4
		NR_CCA_FR1_J			-72.9		-72.9
Propagation condition		-	AWGN	AWGN	AWGN	AWGN	
Antenna configuration			1x2	1x2	1x2	1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

- Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
- Note 5: NR operating band groups are as defined in Clause 3.5.2.
- Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.
- Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.
- Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
- Note 9: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.

Table A.13.4.2.1.2-3: SS-RSRQ Intra frequency test parameters for NR PCell

Parameter		Unit	Test 1 Cell 1	Test 3 Cell 1
SSB ARFCN			freq1	freq1
Duplex mode	Config 1		FDD	FDD
	Config 2,3		TDD	TDD
TDD configuration	Config 1		Not Applicable	Not Applicable
	Config 2		TDDConf.1.1	TDDConf.1.1
	Config 3		TDDConf.2.1	TDDConf.2.1
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52
	Config 2		10: N _{RB,c} = 52	10: N _{RB,c} = 52
	Config 3		40: N _{RB,c} = 106	40: N _{RB,c} = 106
Gap Pattern ID			0	0
Downlink initial BWP configuration			DLBWP.0.1	DLBWP.0.1
Downlink dedicated BWP configuration			DLBWP.1.1	DLBWP.1.1
Uplink initial BWP configuration			ULBWP.0.1	ULBWP.0.1
Uplink dedicated BWP configuration			ULBWP.1.1	ULBWP.1.1
DRX Cycle configuration		ms	Not Applicable	Not Applicable
TRS configuration	Config 1		TRS.1.1 FDD	TRS.1.1 FDD
	Config 2		TRS.1.1 TDD	TRS.1.1 TDD
	Config 3		TRS.1.2 TDD	TRS.1.2 TDD
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD	SR.1.1 FDD
	Config 2		SR.1.1 TDD	SR.1.1 TDD
	Config 3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	CR.1.1 FDD
	Config 2		CR.1.1 TDD	CR.1.1 TDD
	Config 3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	CCR.1.1 FDD
	Config 2		CCR.1.1 TDD	CCR.1.1 TDD
	Config 3		CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns			OP.1	OP.1
SS-RSSI-Measurement			Not Applicable	Not Applicable
SMTc configuration	Config 1		SMTc.2	SMTc.2
	Config 2,3		SMTc.1	SMTc.1
SSB configuration	Config 1,2		SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.2 FR1	SSB.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15	15

		Config 3		30	30
		EPRE ratio of PSS to SSS	dB	0	0
		EPRE ratio of PBCH DMRS to SSS			
		EPRE ratio of PBCH to PBCH DMRS			
		EPRE ratio of PDCCH DMRS to SSS			
		EPRE ratio of PDCCH to PDCCH DMRS			
		EPRE ratio of PDSCH DMRS to SSS			
		EPRE ratio of PDSCH to PDSCH			
		EPRE ratio of OCNG DMRS to SSS(Note 1)			
		EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} ^{Note2}	Config 1, 2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz z	-85	-114
		NR_FDD_FR1_B			-113.5
		NR_TDD_FR1_C			-113
		NR_FDD_FR1_D, NR_TDD_FR1_D			-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-112
		NR_FDD_FR1_F			-111.5
		NR_FDD_FR1_G			-111
		NR_FDD_FR1_H			-110.5
		NR_FDD_FR1_N			-107.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-91	-114
		NR_FDD_FR1_B			-113.5
		NR_TDD_FR1_C			-113
		NR_FDD_FR1_D, NR_TDD_FR1_D			-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-112
		NR_FDD_FR1_F			-111.5
		NR_FDD_FR1_G			-111
		NR_FDD_FR1_H			-110.5
		NR_FDD_FR1_N			-107.5
N_{oc} ^{Note2}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-85	-114
		NR_FDD_FR1_B			-113.5
		NR_TDD_FR1_C			-113
		NR_FDD_FR1_D, NR_TDD_FR1_D			-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-112
		NR_FDD_FR1_F			-111.5
		NR_FDD_FR1_G			-111
		NR_FDD_FR1_H			-110.5
		NR_FDD_FR1_N			-107.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-88	-111
		NR_FDD_FR1_B			-110.5
		NR_TDD_FR1_C			-110
		NR_FDD_FR1_D, NR_TDD_FR1_D			-109.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-109
		NR_FDD_FR1_F			-108.5
		NR_FDD_FR1_G			-108

		NR_FDD_FR1_H			-107.5
		NR_FDD_FR1_N			-104.5
$\hat{E}_s / I_{ot}$			dB	-1.76	-5.46
$\hat{E}_s / N_{oc}$			dB	3	-4
SS-RSRP ^{Note3}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-82	-118
		NR_FDD_FR1_B			-117.5
		NR_TDD_FR1_C			-117
		NR_FDD_FR1_D, NR_TDD_FR1_D			-116.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-116
		NR_FDD_FR1_F			-115.5
		NR_FDD_FR1_G			-115
		NR_FDD_FR1_H			-114.5
		NR_FDD_FR1_N			-111.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85	-115
		NR_FDD_FR1_B			-114.5
		NR_TDD_FR1_C			-114
		NR_FDD_FR1_D, NR_TDD_FR1_D			-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-113
		NR_FDD_FR1_F			-112.5
		NR_FDD_FR1_G			-112
		NR_FDD_FR1_H			-111.5
		NR_FDD_FR1_N			-108.5
SS-RSRQ ^{Note3}		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	-14.77	-17.34
		NR_FDD_FR1_B			
		NR_TDD_FR1_C			
		NR_FDD_FR1_D, NR_TDD_FR1_D			
		NR_FDD_FR1_E, NR_TDD_FR1_E			
		NR_FDD_FR1_F			
		NR_FDD_FR1_G			
		NR_FDD_FR1_H			
		NR_FDD_FR1_N			
I _o ^{Note3}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-50	-83.5
		NR_FDD_FR1_B			-83
		NR_TDD_FR1_C			-82.5
		NR_FDD_FR1_D, NR_TDD_FR1_D			-82
		NR_FDD_FR1_E, NR_TDD_FR1_E			-81.5
		NR_FDD_FR1_F			-81
		NR_FDD_FR1_G			-80.5
		NR_FDD_FR1_H			-80
		NR_FDD_FR1_N			-77
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-50	-77.4

		NR_FDD_FR1_B		-76.9
		NR_TDD_FR1_C		-76.4
		NR_FDD_FR1_D, NR_TDD_FR1_D		-75.9
		NR_FDD_FR1_E, NR_TDD_FR1_E		-75.4
		NR_FDD_FR1_F		-74.9
		NR_FDD_FR1_G		-74.4
		NR_FDD_FR1_H		-73.9
		NR_FDD_FR1_N		-70.9
Propagation condition		-	AWGN	AWGN
Antenna configuration		-	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-SINR, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: NR operating band groups are as defined in clause 3.5.2. Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.				

A.13.4.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.29.1.1.

A.13.4.3 SS-SINR

A.13.4.3.1 Intra-frequency measurement accuracy on SCC

A.13.4.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.31.1.1.

A.13.4.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.13.4.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.13.4.3.1.2-2 and Table A.13.4.3.1.2-3. In all test cases, Cell 1 is the PCell, Cell 2 is the SCell with CCA, and Cell 3 is the target cell with CCA. Two sub-tests (Test 1 and Test 2) are provided different N_{oc} on Cells 1, 2, and 3.

Table A.13.4.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Config	Description
1	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.13.4.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 2	Cell 3	Cell 2	Cell 3
SSB ARFCN			freq2	freq2	freq2	freq2
DL CCA model	Config 1, 2, 3		As specified in clause A.3.26.2.1			
UL CCA model	Config 1, 2, 3		As specified in clause A.3.26.2.2			
UL CCA probability	P _{CCA_UL}		1.0	-	1.0	-
DL CCA probability for semi-static channel access Note 7, 8	P _{CCA_DL}		0.9375	-	0.9375	-
DL CCA probability for dynamic channel access Note 8, 9	P _{CCA_DL_1}		0.75	-	0.75	-
	P _{CCA_DL_2}		0.75	-	0.75	-
Duplex mode	Config 1, 2, 3		TDD			
TDD configuration	Config 1, 2, 3		TDDConf.1.1 CCA			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1, 2, 3		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1, 2, 3		SR.1.1 CCA		SR.1.1 CCA	
RMSI CORESET Reference Channel	Config 1, 2, 3		CR.1.1 CCA		CR.1.1 CCA	
Dedicated CORESET Reference Channel	Config 1, 2, 3		CCR.1.1 CCA		CCR.1.1 CCA	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
DBT Window configuration	Config 1, 2, 3		DBT.1			
Time offset with Cell 1	Config 1, 2, 3	µs	3 (for Cell 2)	3	3 (for Cell 2)	3
SSB configuration	Config 1, 2, 3		SSB.1 CCA for semi-static channel access SSB.2 CCA for dynamic channel access			
SMTC configuration	Config 1, 2, 3		SMTC.1			
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 3	kHz	30			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		NR_CCA_FR1_I	dBm/15kHz	-93		-112
						NR_CCA_FR1_J
N_{oc} Note2	Config 1, 2, 3	NR_CCA_FR1_I	dBm/SCS	-90		-109

		NR_CCA_FR1_J		-108.5			
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
SS-RSRP ^{Not e3}	Config 1, 2, 3	NR_CCA_FR1_I	dBm/SCS	-85.46	-87.34	-113	-113
		NR_CCA_FR1_J				-112.5	-112.5
SS-SINR ^{Note3}		NR_CCA_FR1_I	dB	0	-3.19	-5.46	-5.46
		NR_CCA_FR1_J					
Io ^{Note3}	Config 1, 2, 3	NR_CCA_FR1_I	dBm/ 38.16MHz	-51.41		-75.41	
		NR_CCA_FR1_J				-74.91	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 5: NR operating band groups are as defined in clause 3.5.2.							
Note 6: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configuration.							
Note 7: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.							
Note 8: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.							
Note 9: For UE supporting both semi-static and dynamic channel access, the UE must be tested under both dynamic and semi-static channel occupancy configurations.							

A.13.4.3.1.2-3: SS-SINR Intra frequency test parameters for NR PCell

Parameter		Unit	Test 1	Test 2
			Cell 1	Cell 1
SSB ARFCN			freq1	freq1
Duplex mode	Config 1		FDD	FDD
	Config 2,3		TDD	TDD
TDD configuration	Config 1		Not Applicable	Not Applicable
	Config 2		TDDConf.1.1	TDDConf.1.1
	Config 3		TDDConf.2.1	TDDConf.2.1
Downlink initial BWP configuration			DLBWP.0.1	DLBWP.0.1
Downlink dedicated BWP configuration			DLBWP.1.1	DLBWP.1.1
Uplink initial BWP configuration			ULBWP.0.1	ULBWP.0.1
Uplink dedicated BWP configuration			ULBWP.1.1	ULBWP.1.1
DRX Cycle configuration		ms	Not Applicable	Not Applicable
TRS configuration	Config 1		TRS.1.1 FDD	TRS.1.1 FDD
	Config 2		TRS.1.1 TDD	TRS.1.1 TDD
	Config 3		TRS.1.2 TDD	TRS.1.2 TDD

PDSCH Reference measurement channel	Config 1			SR.1.1 FDD	SR.1.1 FDD
	Config 2			SR.1.1 TDD	SR.1.1 TDD
	Config 3			SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1			CR.1.1 FDD	CR.1.1 FDD
	Config 2			CR.1.1 TDD	CR.1.1 TDD
	Config 3			CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1			CCR.1.1 FDD	CCR.1.1 FDD
	Config 2			CCR.1.1 TDD	CCR.1.1 TDD
	Config 3			CCR.2.1 TDD	CCR.2.1 TDD
OCNG Patterns				OP.1	OP.1
SS-RSSI-Measurement				Not Applicable	Not Applicable
SMTc configuration	Config 1			Not Applicable	Not Applicable
	Config 2,3			SMTc.2	SMTc.2
SSB configuration	Config 1,2			SMTc.1	SMTc.1
	Config 3			SMTc.1	SMTc.1
PDSCH/PDCCH subcarrier spacing	Config 1,2		kHz	SSB.1 FR1	SSB.1 FR1
	Config 3			SSB.2 FR1	SSB.2 FR1
EPRE ratio of PSS to SSS			dB	15	15
EPRE ratio of PBCH DMRS to SSS				30	30
EPRE ratio of PBCH to PBCH DMRS				0	0
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} ^{Note2}	NR_FDD_FR1_A, NR_TDD_FR1_A		dBm/15kHz	-93	-116
	NOTE 6				
	NR_FDD_FR1_B				-115.5
	NR_TDD_FR1_C				-115
	NR_FDD_FR1_D, NR_TDD_FR1_D				-114.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-114
	NR_FDD_FR1_F				-113.5
	NR_FDD_FR1_G				-113
N_{oc} ^{Note2}	NR_FDD_FR1_H			-112.5	
	Config 1,2		dBm/SCS	-93	Same as Noc for 15 kHz
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A		-90	-113
		NOTE 6			
		NR_FDD_FR1_B			-112.5
		NR_TDD_FR1_C			-112
		NR_FDD_FR1_D, NR_TDD_FR1_D			-111.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-111
NR_FDD_FR1_F		-110.5			
	NR_FDD_FR1_G	-110			

		NR_FDD_FR1_H			-109.5
$\hat{E}_s / I_{ot}$			dB	0	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	-4
SS-RSRP ^{Note3}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-88.46	-120
		NR_FDD_FR1_B			-119.5
		NR_TDD_FR1_C			-119
		NR_FDD_FR1_D, NR_TDD_FR1_D			-118.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-118
		NR_FDD_FR1_F			-117.5
		NR_FDD_FR1_G			-117
		NR_FDD_FR1_H			-116.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85.46	-117
		NR_FDD_FR1_B			-116.5
		NR_TDD_FR1_C			-116
		NR_FDD_FR1_D, NR_TDD_FR1_D			-115.5
		NR_FDD_FR1_E, NR_TDD_FR1_E			-115
		NR_FDD_FR1_F			-114.5
		NR_FDD_FR1_G			-114
		NR_FDD_FR1_H			-113.5
SS-SINR ^{Note3}		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	0	-5.46
		NR_FDD_FR1_B			
		NR_TDD_FR1_C			
		NR_FDD_FR1_D, NR_TDD_FR1_D			
		NR_FDD_FR1_E, NR_TDD_FR1_E			
		NR_FDD_FR1_F			
		NR_FDD_FR1_G			
		NR_FDD_FR1_H			
Io ^{Note3}	Config 1,2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.5	-85.51
		NR_FDD_FR1_B			-85.01
		NR_TDD_FR1_C			-84.51
		NR_FDD_FR1_D, NR_TDD_FR1_D			-84.01
		NR_FDD_FR1_E, NR_TDD_FR1_E			-83.51
		NR_FDD_FR1_F			-83.01
		NR_FDD_FR1_G			-82.51
		NR_FDD_FR1_H			-82.01
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	-51.41	-79.41
		NR_FDD_FR1_B			-78.91
		NR_TDD_FR1_C			-78.41
		NR_FDD_FR1_D, NR_TDD_FR1_D			-77.91

		NR_FDD_FR1_E, NR_TDD_FR1_E		-77.41
		NR_FDD_FR1_F		-76.91
		NR_FDD_FR1_G		-76.41
		NR_FDD_FR1_H		-75.91
Propagation condition		-	AWGN	AWGN
Antenna configuration		-	1x2	1x2
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	SS-SINR, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4:	SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			
Note 5:	NR operating band groups are as defined in clause 3.5.2.			
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.			

A.13.4.3.1.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.31.1.1.

A.13.4.4 L1-RSRP measurement for beam reporting with CCA serving cell

A.13.4.4.1 SSB based L1-RSRP measurement

A.13.4.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.33.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.13.4.4.1.1-1.

Table A.13.4.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.13.4.4.1.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a SCell under CCA (Cell2). Cell 2 operates on a carrier frequency with CCA and transmits SSBs in DBT window according to DL CCA model.

Two sub-tests (Test 1 and Test 2) are provided with different N_{oc} on Cell 2. The test parameters for the Cell 1 and Cell 2 are given in Table A.13.4.4.1.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.13.4.4.1.2-1.

The same test is applicable for UE supporting any one or both semi-static channel access or dynamic channel access and for network configuring any of semi-static channel occupancy or dynamic channel occupancy.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. On Cell 2, UE is configured to perform L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.13.4.4.1.2-1: FR1 SSB based L1-RSRP test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Active PCell/SCell Configuration	1~3		PCell	SCell	PCell	SCell
SSB GSCN	1~3		freq1	freq2	freq1	freq2
DL CCA model	1~3		N/A	As specified in A.3.26.2.1	N/A	As specified in A.3.26.2.1
UL CCA model	1~3		N/A	As specified in A.3.26.2.2	N/A	As specified in A.3.26.2.2
Duplex mode	1		FDD	TDD	FDD	TDD
	2,3		TDD		TDD	
TDD configuration	1		N/A	TDDConf.1.1 CCA	N/A	TDDConf.1.1 CCA
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
BW _{channel}	1	MHz	10: N _{RB,c} = 52	40: N _{RB,c} = 106	10: N _{RB,c} = 52	40: N _{RB,c} = 106
	2		10: N _{RB,c} = 52		10: N _{RB,c} = 52	
	3		40: N _{RB,c} = 106		40: N _{RB,c} = 106	
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 CCA	SR.1.1 FDD	SR.1.1 CCA
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 CCA	CR.1.1 FDD	CR.1.1 CCA
	2		CR.1.1 TDD		CR.1.1 TDD	
	3		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 CCA	CCR.1.1 FDD	CCR.1.1 CCA
	2		CCR.1.1 TDD		CCR.1.1 TDD	
	3		CCR.2.1 TDD		CCR.2.1 TDD	
SSB configuration for Semi-static channel access	1		SSB.3 FR1	SSB.3 CCA	SSB.3 FR1	SSB.3 CCA
	2		SSB.3 FR1		SSB.3 FR1	
	3		SSB.4 FR1		SSB.4 FR1	
SSB configuration for Dynamic channel access	1		SSB.3 FR1	SSB.4 CCA	SSB.3 FR1	SSB.4 CCA
	2		SSB.3 FR1		SSB.3 FR1	
	3		SSB.4 FR1		SSB.4 FR1	
TRS configuration	1		TRS.1.1 FDD	TRS.1.2 TDD	TRS.1.1 FDD	TRS.1.2 TDD
	2		TRS.1.1 TDD		TRS.1.1 TDD	

	3		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns	1~3		OP.1		OP.1	
Initial BWP Configuration	1~3		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~3		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
SMTC configuration	1~3		SMTC.1	N/A	SMTC.1	N/A
DBT Window Configuration	1~3		N/A	DBT.1	N/A	DBT.1
reportConfigType	1~3		periodic		periodic	
reportQuantity	1~3		ssb-Index-RSRP		ssb-Index-RSRP	
Number of reported RS	1~3		2		2	
L1-RSRP reporting period	1~3		slot80		slot80	
EPRE ratio of PSS to SSS	1~3	dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
N_{oc} Note2	1~3	dBm/15 kHz	-94.65		-94.65	-
						-
						-
						-
						-
						-
						-
						-
					-	-113
N_{oc} Note2	1~3	dBm/S SB SCS	-91.65		-91.65	-
						-
						-
						-
						-
						-
						-
						-
					-	-110
$\hat{E}_s/I_{ot}$	1~3	dB	10		10	-3
SS-RSRP ^{Note3}	1~3	dBm/S CS	-81.65		-81.65	-
						-
						-
						-

	NR_FDD_FR1_E, NR_TDD_FR1_E					-
	NR_FDD_FR1_F					-
	NR_FDD_FR1_G					-
	NR_FDD_FR1_H					-
	NR_TDD_FR1_I				-	-113
Io ^{Note3}	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~3	dBm/ 38.16M Hz	-50.19	-50.19	-
	NR_FDD_FR1_B					-
	NR_TDD_FR1_C					-
	NR_FDD_FR1_D, NR_TDD_FR1_D					-
	NR_FDD_FR1_E, NR_TDD_FR1_E					-
	NR_FDD_FR1_F					-
	NR_FDD_FR1_G					-
	NR_FDD_FR1_H					-
	NR_TDD_FR1_I					-
$\hat{E}_s/N_{oc}$		1~3	dB	10	10	-3
Propagation condition		1~3		AWGN	AWGN	
Antenna configuration		1~3		1x2	1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. For cells with CCA model, OCNG is transmitted only in the slots with downlink transmission burst and is not transmitted during the muted slots or during DBT window.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.						

A.13.4.4.1.3 Test Requirements

In both Test 1 and Test 2, the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses 10.1.33.1.

A.13.4.5 RSSI

A.13.4.5.1 Intra-frequency RSSI measurement accuracy on a carrier with CCA

A.13.4.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in Section 10.1.34.1.

A.13.4.5.1.2 Test parameters

In all test cases, Cell 1 is the PCell on a licensed FR1 band and Cell 2 is the SCell with CCA. RSSI is measured on channel number 2. Supported test configurations are shown in table A.13.4.5.1.2-1. The accuracy of RSSI intra-frequency measurements is tested by using the parameters in A.13.4.5.1.2-2 and A.13.4.5.1.2-3.

Table A.13.4.5.1.2-1: Intra frequency RSSI supported test configurations

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.4.5.1.2-2: RSSI Intra frequency test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
BW _{channel}			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.2 CCA
P _{CCA_DL} for dynamic channel access Note 1,3		1,2,3		1	P _{CCA_DL1} =0.75 P _{CCA_DL2} =0.75
P _{CCA_DL} for semi-static channel access Note 2,3		1,2,3		1	P _{CCA_DL} =0.9375
P _{CCA_UL}				1	1
DL CCA model				N/A	As specified in A.3.26.2.1
UL CCA model				N/A	As specified in A.3.26.2.2
Measurement bandwidth			n_{PRE}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel	1			SR.1.1 FDD	SR.1.1 CCA
	2,3			SR.1.1 TDD	
RMSI CORESET Reference Channel	1			CR.1.1 FDD	CR.1.1 CCA
	2,3			CR.1.1 TDD	
Dedicated CORESET Reference Channel	1			CCR.1.1 FDD	CCR.1.1 CCA
	2,3			CCR.1.1 TDD	
OCNG Patterns				OP.1	OP.1
EPRE ratio of PSS to SSS			dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					

EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-58.96
Propagation condition		-	AWGN	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.13.4.5.1.2-3: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.13.4.5.1.3 Test Requirements

The average RSSI measurement accuracy shall fulfil the requirements in sections 10.1.34.1. The nominal RSSI used to evaluate the requirement shall be based on I_o in slots corresponding to RSSI measurement time configuration (RMTC).

A.13.4.5.2 Inter-frequency RSSI measurement accuracy on a carrier with CCA

A.13.4.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the RSSI measurement accuracy is within the specified limits. This test will partially verify the RSSI measurement accuracy requirements in Section 10.1.34.2.

A.13.4.5.2.2 Test parameters

In all test cases, Cell 1 is the PCell on a licensed FR1 band and Cell 2 is the neighbour with CCA. RSSI is measured on channel number 2. Supported test configurations are shown in table A.13.4.5.2.2-1. The accuracy of RSSI inter-frequency measurements is tested by using the parameters in A.13.4.5.2.2-2 and A.13.4.5.2.3.

Table A.13.4.5.2.2-1: Inter frequency RSSI supported test configurations

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.4.5.2.2-2: RSSI Inter frequency test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
BW _{channel}			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.2 CCA
P _{CCA_DL} for dynamic channel access Note 1,3		1,2,3		1	P _{CCA_DL_1} =0.75 P _{CCA_DL_2} =0.75
P _{CCA_DL} for semi-static channel access Note 2,3		1,2,3		1	P _{CCA_DL} =0.9375
P _{CCA_UL}				1	1
DL CCA model				N/A	As specified in A.3.26.2.1
UL CCA model				N/A	As specified in A.3.26.2.2
Measurement bandwidth			η_{PRE}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel	1			SR.1.1 FDD	NA
	2,3			SR.1.1 TDD	
RMSI CORESET Reference Channel	1			CR.1.1 FDD	NA
	2,3			CR.1.1 TDD	
Dedicated CORESET Reference Channel	1			CCR.1.1 FDD	NA
	2,3			CCR.1.1 TDD	
OCNG Patterns				OP.1	NA
EPRE ratio of PSS to SSS			dB	0	NA

EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measB W	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measB W	-77.96	-58.96
Propagation condition		-	AWGN	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				
Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.				
Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.				

Table A.13.4.5.2.2-3: RSSI RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.13.4.5.2.3 Test Requirements

The average RSSI measurement accuracy shall fulfil the requirements in sections 10.1.34.2. The nominal RSSI used to evaluate the requirement shall be based on I_0 in slots corresponding to RSSI measurement time configuration (RMTTC).

A.13.4.6 Channel occupancy

A.13.4.6.1 Intra-frequency channel occupancy measurement accuracy on SCC with CCA

A.13.4.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in Section 10.1.35.1.

A.13.4.6.1.2 Test parameters

In all test cases, Cell 1 is the PCell on a licensed FR1 band and Cell 2 is the SCell with CCA. Channel occupancy is measured on channel number 2. Supported test configurations are shown in table A.13.4.6.1.2-1. The accuracy of channel occupancy intra-frequency measurements is tested by using the parameters in A.13.4.6.1.2-2 and A.13.4.6.1.2-3.

Table A.13.4.6.1.2-1: Intra frequency CO supported test configurations

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.4.6.1.2-2: CO Intra frequency test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
BW_{channel}			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.1 CCA
	Dynamic channel access Note 2, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.2 CCA
$P_{\text{CCA_DL}}$ for dynamic channel access Note 1,3		1,2,3		1	$P_{\text{CCA_DL_1}}=0.75$ $P_{\text{CCA_DL_2}}=0.75$
$P_{\text{CCA_DL}}$ for semi-static channel access Note 2,3		1,2,3		1	$P_{\text{CCA_DL}}=0.9375$
$P_{\text{CCA_UL}}$				1	1
DL CCA model				N/A	As specified in A.3.26.2.1

UL CCA model			N/A	As specified in A.3.26.2.2
Measurement bandwidth		n_{PRE}	Same as channel access bandwidth	
Channel access bandwidth		MHz	20	
DRX Cycle configuration		ms	Not Applicable	
PDSCH Reference measurement channel	1		SR.1.1 FDD	SR.1.1 CCA
	2,3		SR.1.1 TDD	
RMSI CORESET Reference Channel	1		CR.1.1 FDD	CR.1.1 CCA
	2,3		CR.1.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.1.1 FDD	CCR.1.1 CCA
	2,3		CCR.1.1 TDD	
OCNG Patterns			OP.1	OP.1
EPRE ratio of PSS to SSS		dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)		dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)			-103.5	-Infinity
Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-58.96
Propagation condition		-	AWGN	
channelOccupancyThreshold		dBm	-83	
Note 1: For UE supporting semi-static channel access and network configuring semi-static channel occupancy.				

Note 2: For UE supporting dynamic channel access and network configuring dynamic channel occupancy.
 Note 3: For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.

Table A.13.4.6.1.2-3: CO RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.13.4.6.1.3 Test Requirements

The nominal reported *channelOccupancy* shall be 100%. At least 90% of channel occupancy reports made by the UE shall indicate this value.

A.13.4.6.2 Inter-frequency channel occupancy measurement accuracy on a carrier with CCA**A.13.4.6.2.1 Test Purpose and Environment**

The purpose of this test is to verify that the channel occupancy measurement accuracy is within the specified limits. This test will partially verify the channel occupancy measurement accuracy requirements in Section 10.1.35.2.

A.13.4.6.2.2 Test parameters

In all test cases, Cell 1 is the PCell on a licensed FR1 band and Cell 2 is the neighbour with CCA. Channel occupancy is measured on channel number 2. Supported test configurations are shown in table A.13.4.6.2.2-1. The accuracy of channel occupancy inter-frequency measurements is tested by using the parameters in A.13.4.6.2.2-2 and A.13.4.6.2.3.

Table A.13.4.6.2.2-1: Inter frequency CO supported test configurations

Configuration	Description
1	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
2	Without CCA: 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
3	Without CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode With CCA: 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
NOTE: The UE is only required to be tested in one of the supported test configurations.	

Table A.13.4.6.2.2-2: CO Inter frequency test parameters

Parameter		Configurations	Unit	Test 1	
				Cell 1	Cell 2
RF Channel Number				1	2
BW _{channel}			MHz	40	40
SSB configuration	Semi-static channel access Note 1, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.1 CCA

	Dynamic channel access Note 2, 3	1,2,3		Configuration 1,2: SSB.1 FR1 Configuration 3: SSB.2 FR1	SSB.2 CCA
P_{CCA_DL} for dynamic channel access Note 1,3		1,2,3		1	$P_{CCA_DL_1}=0.75$ $P_{CCA_DL_2}=0.75$
P_{CCA_DL} for semi-static channel access Note 2,3		1,2,3		1	$P_{CCA_DL}=0.9375$
P_{CCA_UL}				1	1
DL CCA model				N/A	As specified in A.3.26.2.1
UL CCA model				N/A	As specified in A.3.26.2.2
Measurement bandwidth			n_{PRE}	Same as channel access bandwidth	
Channel access bandwidth			MHz	20	
DRX Cycle configuration			ms	Not Applicable	
PDSCH Reference measurement channel		1 2,3		SR.1.1 FDD SR.1.1 TDD	NA
RMSI CORESET Reference Channel		1 2,3		CR.1.1 FDD CR.1.1 TDD	
Dedicated CORESET Reference Channel		1 2,3		CCR.1.1 FDD CCR.1.1 TDD	NA
OCNG Patterns				OP.1	
EPRE ratio of PSS to SSS			dB	0	NA
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-106
N_{oc} in slots corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-106	-87
$\hat{E}_s/I_{ot}$ in slots not corresponding to RSSI measurement time configuration (RMTC)			dB	2.5	2.5
$\hat{E}_s/I_{ot}$ in slots corresponding to RSSI measurement time configuration (RMTC)			dB	2.5	-Infinity
SS-RSRP in slots not corresponding to RSSI measurement time configuration (RMTC)			dBm/SCS	-103.5	-103.5
SS-RSRP in slots corresponding to RSSI measurement time configuration (RMTC)				-103.5	-Infinity

Io within measurement bandwidth in slots not corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-77.96
Io within measurement bandwidth in slots corresponding to RSSI measurement time configuration (RMTC)		dBm/measBW	-77.96	-58.96
Propagation condition		-	AWGN	
channelOccupancyThreshold		dBm	-83	
Note 1:	For UE supporting semi-static channel access and network configuring semi-static channel occupancy.			
Note 2:	For UE supporting dynamic channel access and network configuring dynamic channel occupancy.			
Note 3:	For a UE supporting both semi-static and dynamic channel access, the UE can be tested under dynamic channel occupancy only.			

Table A.13.4.6.2.2-3: CO RMTC parameters

measDurationSymbols-r16	sym14or12
rmtc-Periodicity-r16	ms40
rmtc-SubframeOffset-r16	20
ref-SCS-CP-r16	kHz15
ReportInterval	ms120

A.13.4.6.2.3 Test Requirements

The nominal reported *channelOccupancy* shall be 100%. At least 90% of channel occupancy reports made by the UE shall indicate this value.

A.14 NR standalone tests for Satellite access

A.14.1 RRC_IDLE state mobility

A.14.1.1 Cell reselection to FR1 intra-frequency NR case

A.14.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for satellite access specified in clause 4.2C.2.3.

A.14.1.1.2 Test Parameters

The test scenario comprises of 2 cells on 1 NR carrier configured each in a different satellite as given in tables A.14.1.1.2-1, A.14.1.1.2-2 and A.14.1.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.14.1.1.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz

Note: The UE is only required to be tested in one of the supported test configurations
--

Table A.14.1.1.2-2: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
T2 end condition	Active cell		Cell2	
Final condition	Neighbour cells		Cell1	
	Active cell		Cell1	
	Neighbour cells		Cell2	
RF Channel Number			1	
Time offset between cells			3 ms	Asynchronous cells
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
PRACH configuration index			102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			Not configured	
T1		s	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	40 (NOTE 1)	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3		s	15 (NOTE 1)	T3 needs to be defined so that cell re-selection reaction time is taken into account.
NOTE 1: If the test is performed in a LEO configuration, and the scaling factor $K_{\text{multi_SMTC}}$ defined in clause 4.2C.2.3 is greater than 1, according to UE capabilities, the duration of times T2 and T3 shall be scaled for the same factor to allow the UE to complete the cell reselection within the duration of the test case.				

Table A.14.1.1.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
Satellite information		SSC.1 for Config 1 SSC.2 for Config 2			NSC.1 for Config 1 NSC.2 for Config 2		
PDSCH RMC configuration		SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET configuration		CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET configuration		CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		

SSB configuration		SSB.1 FR1			SSB.5 FR1		
SMTC configuration		#1: SMTC.1 for Cell 1 #2: SMTC.4 for Cell 2			#1: SMTC.1 for Cell 1 #2: SMTC.4 for Cell 2		
RLM-RS		SSB			SSB		
Qrxlevmin	dBm/SCS	-130			-130		
Pcompensation	dB	0			0		
Qhyst _s	dB	0			0		
Qoffset _{s, n}	dB	0			0		
Cell_selection_and_reselection_quality_measurement		SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	16	-3.11	2.79	-infinity	2.79	-3.11
N_{oc} Note2	dBm/SCS	-98					
N_{oc} Note2	dBm/15 kHz	-98					
$\hat{E}_s / N_{oc}$	dB	16	13	16	-infinity	16	13
SS-RSRP Note3	dBm/SCS	-82	-85	-82	-infinity	-82	-85
Io	dBm/9.36 MHz	-53.94	-52.21	-52.21	Same as parameters specified in Cell 1 columns-		
Treselection	s	0	0	0	0	0	0
SintrasearchP	dB	60			60		
Propagation Condition		AWGN					

A.14.1.1.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than:

34 s if $K_{\text{multi_SMTC}}$ is equal to 1 (see note on Table A.14.1.1.2-2); or

66 s if $K_{\text{multi_SMTC}}$ is equal to 2.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than:

8 s if $K_{\text{multi_SMTC}}$ is equal to 1 (see note on Table A.14.1.1.2-2); or

14.5 s if $K_{\text{multi_SMTC}}$ is equal to 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $K_{\text{multi_SMTC}} * T_{\text{detect, NR_Intra}} + T_{\text{SI-NR}}$, and to an already detected cell can be expressed as: $K_{\text{multi_SMTC}} * T_{\text{evaluate, NR_intra}} + T_{\text{SI-NR}}$.

Where:

$T_{\text{detect, NR_Intra}}$ See Table 4.2C.2.3-1 in clause 4.2C.2.3

$T_{\text{evaluate, NR_intra}}$ See Table 4.2C.2.3-1 in clause 4.2C.2.3

$K_{\text{multi_SMTC}}$ is described in clause 4.2C.2.3

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 20ms period and 80 ms period, respectively.

If $K_{\text{multi_SMTC}} = 1$, $K_{\text{multi_SMTC}} * T_{\text{evaluate, NR_intra}} + T_{\text{SI-NR}} = 7.68$ s; allow 8 s. And $K_{\text{multi_SMTC}} * T_{\text{detect, NR_intra}} + T_{\text{SI-NR}} = 33.28$ s, allow 34s.

If $K_{\text{multi_SMTC}} = 2$, $K_{\text{multi_SMTC}} * T_{\text{evaluate, NR_intra}} + T_{\text{SI-NR}} = 14.08$ s; allow 14.5 s. And $K_{\text{multi_SMTC}} * T_{\text{detect, NR_intra}} + T_{\text{SI-NR}} = 65.28$ s, allow 66s.

A.14.1.2 Cell reselection to FR1 intra-frequency NR cell for UE configured with the feature for enhanced requirements

A.14.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for satellite access specified in clause 4.2C.2.3.

A.14.1.2.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.14.1.2.2-1, A.14.1.2.2-2 and A.14.1.2.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2. The flag *enhancedMeasurementNGSO-r17* should be set.

Table A.14.1.2.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.1.2.2-2: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cells		Cell1	
T2 end condition	Active cell		Cell2	
	Neighbour cells		Cell2	
Final condition	Active cell		Cell1	
	Neighbour cells		Cell2	
RF Channel Number			1	
Time offset between cells			3 ms	Asynchronous cells
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
PRACH configuration index			102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2

rangeToBestCell		Not configured	
T1	s	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	40 (NOTE 1)	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	15 (NOTE 1)	T3 needs to be defined so that cell re-selection reaction time is taken into account.
NOTE 1: If the test is performed in a NGSO configuration, and the scaling factor $K_{\text{multi_SMTc}}$ defined in clause 4.2C.2.3 is greater than 1, according to UE capabilities, the duration of times T2 and T3 shall be scaled for the same factor to allow the UE to complete the cell reselection within the duration of the test case.			

Table A.14.1.2.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
Satellite information		SSC.1 for Config 1 SSC.2 for Config 2			NSC.1 for Config 1 NSC.2 Config 2		
PDSCH RMC configuration		SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET configuration		CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET configuration		CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
SSB configuration		SSB.1 FR1			SSB.X FR1		
SMTc configuration		#1: SMTc.2 for Cell 1 #2: SMTc.7 for Cell 2			#1: SMTc.2 for Cell 1 #2: SMTc.7 for Cell 2		
RLM-RS		SSB			SSB		
Q_{rxlevmin}	dBm/SCS	-130			-130		
$P_{\text{compensation}}$	dB	0			0		
Q_{hyst_s}	dB	0			0		
$Q_{\text{offset}_{s,n}}$	dB	0			0		
Cell_selection_and_reselection_quality_measurement		SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{\text{ot}}$	dB	16	-3.11	2.79	-infinity	2.79	-3.11
N_{oc} ^{Note2}	dBm/SCS	-98					
N_{oc} ^{Note2}	dBm/15 kHz	-98					
$\hat{E}_s / N_{\text{oc}}$	dB	16	13	16	-infinity	16	13
SS-RSRP ^{Note3}	dBm/SCS	-82	-85	-82	-infinity	-82	-85
I_{o}	dBm/9.36 MHz	-53.94	-52.21	-52.21	Same as parameters specified in Cell 1 columns-		
Treselection	s	0	0	0	0	0	0
SintrasearchP	dB	60			60		

Propagation Condition		AWGN
-----------------------	--	------

A.14.1.2.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than:

11 s if $K_{\text{multi_SMTC}}$ is equal to 1 (see note on Table A.14.1.2.2-2); or

20 s if $K_{\text{multi_SMTC}}$ is equal to 2.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than:

6 s if $K_{\text{multi_SMTC}}$ is equal to 1 (see note on Table A.14.1.2.2-2); or

9 s if $K_{\text{multi_SMTC}}$ is equal to 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $K_{\text{multi_SMTC}} * T_{\text{detect, NR_Intra_enh}} + T_{\text{SI-NR}}$, and to an already detected cell can be expressed as: $K_{\text{multi_SMTC}} * T_{\text{evaluate, NR_intra_enh}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{detect, NR_Intra_enh}}$ See Table 4.2C.2.3-2 in clause 4.2C.2.3

$T_{\text{evaluate, NR_Intra_enh}}$ See Table 4.2C.2.3-2 in clause 4.2C.2.3

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 20ms period and 80 ms period, respectively.

If $K_{\text{multi_SMTC}} = 1$, $K_{\text{multi_SMTC}} * T_{\text{evaluate, NR_Intra_enh}} + T_{\text{SI-NR}} = 5.12$ s; allow 6 s. And $K_{\text{multi_SMTC}} * T_{\text{detect, NR_Intra_enh}} + T_{\text{SI-NR}} = 10.24$ s, allow 11 s.

If $K_{\text{multi_SMTC}} = 2$, $K_{\text{multi_SMTC}} * T_{\text{evaluate, NR_Intra_enh}} + T_{\text{SI-NR}} = 8.96$ s; allow 9 s. And $K_{\text{multi_SMTC}} * T_{\text{detect, NR_Intra_enh}} + T_{\text{SI-NR}} = 19.2$ s, allow 20s.

A.14.1.3 Time-based measurement initiation to FR1 intra-frequency NR cell reselection

A.14.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for satellite access specified in clause 4.2C.2.3.

A.14.1.3.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.14.1.a3.2-1, A.14.1.a3.2-2 and A.14.1.a3.2-3. The test consists of two successive time periods, with time duration of T1 and T2, respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2. t-Service broadcasted in SIB19 of Cell 1 is set to the time point that is 36s after start of T2.

Table A.14.1.3.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.1.3.2-2: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
T2 end condition	Active cell		Cell2	
	Neighbour cells		Cell1	
RF Channel Number			1	
Time offset between cells			3 ms	Asynchronous cells
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
PRACH configuration index			102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			Not configured	
T1		s	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	40 (NOTE 1)	T2 needs to be defined so that cell re-selection reaction time is taken into account.
NOTE 1: If the test is performed in a NGSO configuration, and the scaling factor $K_{\text{multi_SMTC}}$ defined in clause 4.2C.2.3 is greater than 1, according to UE capabilities, the duration of time T2 shall be scaled for the same factor to allow the UE to complete the cell reselection within the duration of the test case.				

Table A.14.1.3.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Satellite information		SSC.1 for Config 1 SSC.2 for Config 2		NSC.1 for Config 1 NSC.2 for Config 2	
PDSCH RMC configuration		SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET configuration		CR.1.1 FDD		CR.1.1 FDD	

Dedicated CORESET configuration		CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		ULBWP.0.1		ULBWP.0.1	
SSB configuration		SSB.1 FR1		SSB.1 FR1	
SMTC configuration		#1: SMTC.1 for Cell 1 and Cell 2		#1: SMTC.1 for Cell 1 and Cell 2	
RLM-RS		SSB		SSB	
Qrxlevmin	dBm/SCS	-130		-130	
Pcompensation	dB	0		0	
Qhyst _s	dB	0		0	
Qoffset _{s, n}	dB	0		0	
Cell_selection_and_reselection_quality_measurement		SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	16	-3.11	-infinity	2.79
N_{oc} ^{Note2}	dBm/SCS	-98			
N_{oc} ^{Note2}	dBm/15 kHz	-98			
$\hat{E}_s / N_{oc}$	dB	16	13	-infinity	16
SS-RSRP ^{Note3}	dBm/SCS	-82	-85	-infinity	-82
Io	dBm/9.36 MHz	-53.94	-52.21	Same as parameters specified in Cell 1 columns-	
Treselection	s	0	0	0	0
SintrasearchP	dB	40		40	
Propagation Condition		AWGN			

A.14.1.3.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than :

34 s if $K_{\text{multi_SMTC}}$ is equal to 1 (see note on Table A.14.1.3.2-2); or

66 s if $K_{\text{multi_SMTC}}$ is equal to 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $K_{\text{multi_SMTC}} * T_{\text{detect, NR_Intra}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{detect, NR_Intra}}$ See Table 4.2C.2.3-1 in clause 4.2C.2.3

T_{SI-NR} Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 20ms period and 80 ms period, respectively.

If $K_{multi_SMTC} = 1$, $K_{multi_SMTC} * T_{detect, NR_intra} + T_{SI-NR} = 33.28$ s, allow 34s.

If $K_{multi_SMTC} = 2$, $K_{multi_SMTC} * T_{detect, NR_intra} + T_{SI-NR} = 65.28$ s, allow 66s.

A.14.1.4 Location-based cell measurement initiation to FR1 intra-frequency NR cell reselection

A.14.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for satellite access specified in clause 4.2C.2.3.

A.14.1.4.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.14.1.a4.2-1, A.14.1.a4.2-2 and A.14.1.a4.2-3. The test consists of two successive time periods, with time duration of T1 and T2, respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

At 4s after the start of T2, the UE location is changed such that the distance to the reference location broadcasted in SIB19 of Cell 1 is exceeded by the configured value in *distanceThresh* plus 50m.

Table A.14.1.4.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.1.4.2-2: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
T2 end condition	Active cell		Cell2	
	Neighbour cells		Cell1	
RF Channel Number			1	
Time offset between cells			3 ms	Asynchronous cells
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
PRACH configuration index			102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			Not configured	
T1		s	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2

T2	s	40 (NOTE 1)	T2 needs to be defined so that cell re-selection reaction time is taken into account.
NOTE 1: If the test is performed in a NGSO configuration, and the scaling factor $K_{\text{multi_SMTC}}$ defined in clause 4.2C.2.3 is greater than 1, according to UE capabilities, the duration of time T2 shall be scaled for the same factor to allow the UE to complete the cell reselection within the duration of the test case.			

Table A.14.1.4.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Satellite information		SSC.1 for Config 1 SSC.2 for Config 2		NSC.1 for Config 1 NSC.2 for Config 2	
PDSCH RMC configuration		SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET configuration		CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET configuration		CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		ULBWP.0.1		ULBWP.0.1	
SSB configuration		SSB.1 FR1		SSB.1 FR1	
SMTC configuration		#1: SMTC.1 for Cell 1 and Cell 2		#1: SMTC.1 for Cell 1 and Cell 2	
RLM-RS		SSB		SSB	
Qrxlevmin	dBm/SCS	-130		-130	
Pcompensation	dB	0		0	
Qhyst _s	dB	0		0	
Qoffset _{s, n}	dB	0		0	
Cell_selection_and_reselection_quality_measurement		SS-RSRP		SS-RSRP	
$\hat{E}_s/I_{ot}$	dB	16	-3.11	-infinity	2.79
N_{oc} ^{Note2}	dBm/SCS	-98			
N_{oc} ^{Note2}	dBm/15 kHz	-98			
$\hat{E}_s/N_{oc}$	dB	16	13	-infinity	16
SS-RSRP ^{Note3}	dBm/SCS	-82	-85	-infinity	-82
Io	dBm/9.36 MHz	-53.94	-52.21	Same as parameters specified in Cell 1 columns-	
Treselection	s	0	0	0	0
SintrasearchP	dB	40		40	
Propagation Condition		AWGN			

A.14.1.4.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the

RRCSetupRequest message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than:

34 s if $K_{\text{multi_SMTC}}$ is equal to 1 (see note on Table A.14.1.3.2-2); or

66 s if $K_{\text{multi_SMTC}}$ is equal to 2.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $K_{\text{multi_SMTC}} * T_{\text{detect, NR_Intra}} + T_{\text{SI-NR}}$, and to an already detected cell can be expressed as: $K_{\text{multi_SMTC}} * T_{\text{evaluate, NR_intra}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{detect, NR_Intra}}$ See Table 4.2C.2.3-1 in clause 4.2C.2.3

$T_{\text{evaluate, NR_intra}}$ See Table 4.2C.2.3-1 in clause 4.2C.2.3

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 20ms period and 80 ms period, respectively.

If $K_{\text{multi_SMTC}} = 1$, $K_{\text{multi_SMTC}} * T_{\text{detect, NR_intra}} + T_{\text{SI-NR}} = 33.28$ s, allow 34s.

If $K_{\text{multi_SMTC}} = 2$, $K_{\text{multi_SMTC}} * T_{\text{detect, NR_intra}} + T_{\text{SI-NR}} = 65.28$ s, allow 66s.

A.14.1.5 Cell reselection to FR1 inter-frequency NR case

A.14.1.5.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for satellite access specified in clause 4.2C.2.4.

A.14.1.5.2 Test Parameters

The test scenario comprises of 2 NR carriers and 2 cells as given in tables A.14.1.5.2-1, A.14.1.5.2-2 and A.14.1.5.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and Cell 2 is of higher priority than Cell 1. Furthermore, UE has not registered with network for the tracking area containing Cell 2.

Table A.14.1.5.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.1.5.2-2: General test parameters for inter frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
T2 end condition	Active cell		1, 2	Cell2	

Final condition	Neighbour cells		1, 2	Cell1	
	Active cell		1, 2	Cell1	
	Neighbour cells		1, 2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 ms	Asynchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 2	SSB.1 FR1	
SMTC configuration#1			1, 2	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
SMTC configuration#2			1, 2	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2	>7	During T2, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T3.
T3		s	1, 2	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.14.1.5.2-3: Cell specific test parameters for inter frequency NR cell re-selection test case

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Satellite information		1	SSC.1			SSC.1		
		2	SSC.2			SSC.2		
PDSCH RMC configuration		1, 2	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2	-140			-140		
Pcompensation	dB	1, 2	0			0		
Qhyst _s	dB	1, 2	0			0		
Qoffset _{s, n}	dB	1, 2	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, 2	14	14	14	-4	-infinity	12

N_{oc} Note2	dBm/SCS	1, 2	-98					
N_{oc} Note2	dBm/15 kHz	1, 2	-98					
$\hat{E}_s / N_{oc}$	dB	1, 2	14	14	14	-4	-infinity	12
SS-RSRP Note3	dBm/SCS	1, 2	-84	-84	-84	-102	-infinity	86
Io	dBm/9.36 MHz	1, 2	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
Treselection	s	1, 2	0	0	0	0	0	0
SnonIntraSearchP	dB	1, 2	50			50		
Thresh _{x, highP}	dB	1, 2	48			48		
Thresh _{serving, lowP}	dB	1, 2	44			44		
Thresh _{x, lowP}	dB	1, 2	50			50		
Propagation Condition		1, 2	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers							
	and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.14.1.5.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 1.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$, and to a lower priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$.

Where:

$T_{\text{higher_priority_search}}$ See clause 4.2C.2.9

$T_{\text{evaluate, NR_inter}}$ See Table 4.2C.2.4-1 in clause 4.2C.2.4

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority

A.14.1.6 Cell reselection to FR1 inter-frequency NR cell for UE configured with feature for enhanced requirements

A.14.1.6.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for satellite access specified in clause 4.2C.2.4.

A.14.1.6.2 Test Parameters

The test scenario comprises of 2 NR carriers and 2 cells as given in tables A.14.1.6.2-1, A.14.1.6.2-2 and A.14.1.6.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and Cell 2 is of higher priority than Cell 1. Furthermore, UE has not registered with network for the tracking area containing cell 2. The flag *enhancedMeasurementNGSO-r17* should be set.

Table A.14.1.6.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.1.6.2-2: General test parameters for inter frequency NR cell re-selection test case

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
T2 end condition	Active cell		Cell2	
	Neighbour cells		Cell1	
Final condition	Active cell		Cell1	
	Neighbour cells		Cell2	
RF Channel Number			1	
Time offset between cells			3 ms	Asynchronous cells
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
SSB configuration			SSB.1 FR1	
SMTC configuration#1			SMTC.2	Configured in SIB2 of Cell 1
			SMTC.6	Configured in SIB2 of Cell 2
SMTC configuration#2			SMTC.2	Configured in SIB2 of Cell 1
			SMTC.6	Configured in SIB2 of Cell 2
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
PRACH configuration index			102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			Not configured	
T1		s	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	>7	During T2, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T3.

T3	s	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.
----	---	----	---

Table A.14.1.6.2-3: Cell specific test parameters for inter frequency NR cell re-selection test case

Parameter	Unit	Cell 1			Cell 2		
		T1	T2	T3	T1	T2	T3
Satellite information		SSC.1 for Config 1 SSC.2 for Config 2			SSC.1 for Config 1 SSC.2 for Config 2		
PDSCH RMC configuration		SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		OP.1			OP.1		
Initial DL BWP configuration		DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		ULBWP.0.1			ULBWP.0.1		
RLM-RS		SSB			SSB		
Qrxlevmin	dBm/SCS	-130			-130		
Pcompensation	dB	0			0		
Qhyst _s	dB	0			0		
Qoffset _{s, n}	dB	0			0		
Cell_selection_and_reselection_quality_measurement		SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	14	14	14	-4	-infinity	12
N_{oc} ^{Note2}	dBm/SCS	-98					
N_{oc} ^{Note2}	dBm/15 kHz	-98					
$\hat{E}_s / N_{oc}$	dB	14	14	14	-4	-infinity	12
SS-RSRP ^{Note3}	dBm/SCS	-84	-84	-84	-102	-infinity	-86
I _o	dBm/9.36 MHz	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
Treselection	s	0	0	0	0	0	0
S _{nonIntrasearchP}	dB	50			50		
Thresh _{x, highP}	dB	48			48		
Thresh _{serving, lowP}	dB	44			44		
Thresh _{x, lowP}	dB	50			50		
Propagation Condition		AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.14.1.6.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on Cell 2, and starts to send preambles on the PRACH for sending the

RRCSetupRequest message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a higher priority cell shall be less than 66 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 1.

The cell re-selection delay to a lower priority cell shall be less than 6 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{evaluate, NR_inter_enh}} + T_{\text{SI-NR}}$, and to a lower priority cell can be expressed as: $T_{\text{evaluate, NR_inter_enh}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{higher_priority_search}}$ See clause 4.2C.9

$T_{\text{evaluate, NR_inter_enh}}$ See Table 4.2C.2.4-2 in clause 4.2C.2.4

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 65.12 s, allow 66 s for the cell re-selection delay to a higher priority

A.14.1.7 Time-based Cell measurement initiation to FR1 inter-frequency cell reselection

A.14.1.7.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for satellite access specified in clause 4.2C.2.4.

A.14.1.7.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.14.1.7.2-1, A.14.1.7.2-2 and A.14.1.7.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2. t-Service broadcasted in SIB19 of Cell 1 is set to the time point that is 36s after start of T2.

Table A.14.1.7.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.1.7.2-2: General test parameters for inter frequency NR cell re-selection test case

Parameter	Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1

T2 end condition	Active cell		1, 2	Cell2	
	Neighbour cells		1, 2	Cell1	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 ms	Asynchronous cells
Access Barring Information	-		1, 2	Not Sent	No additional delays in random access procedure.
DRX cycle length	s		1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1	s		1, 2	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s		1, 2	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.14.1.7.2-3: Cell specific test parameters for inter frequency NR cell re-selection test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Satellite information		SSC.1 for Config 1 SSC.2 for Config 2		NSC.1 for Config 1 NSC.2 for Config 2	
PDSCH RMC configuration		SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET configuration		CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET configuration		CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		ULBWP.0.1		ULBWP.0.1	
SSB configuration		SSB.1 FR1		SSB.1 FR1	
SMTC configuration		#1: SMTC.1 for Cell 1 and Cell 2		#1: SMTC.1 for Cell 1 and Cell 2	
RLM-RS		SSB		SSB	
Qrxlevmin	dBm/SCS	-130		-130	
Pcompensation	dB	0		0	
Qhyst _s	dB	0		0	
Qoffset _{s, n}	dB	0		0	
Cell_selection_and_reselection_quality_measurement		SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	16	-3.11	-infinity	2.79
N_{oc} Note2	dBm/SCS	-98			
N_{oc} Note2	dBm/15 kHz	-98			
$\hat{E}_s / N_{oc}$	dB	16	13	-infinity	16

SS-RSRP ^{Note3}	dBm/SCS	-82	-85	-infinity	-82
Io	dBm/9.36 MHz	-53.94	-52.21	Same as parameters specified in Cell 1 columns-	
Treselection	s	0	0	0	0
SintersearchP	dB	40		40	
Propagation Condition		AWGN			

A.14.1.7.3 Test Requirements

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a lower priority cell shall be less than [36] s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{evaluate, NR_inter}}$ See Table 4.2C.2.4-1 in clause 4.2C.2.4

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 80ms period.

A.14.1.8 Location-based measurement initiation to FR1 inter-frequency NR cell reselection

A.14.1.8.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for satellite access specified in clause 4.2C.2.4.

A.14.1.8.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.14.1.8.2-1, A.14.1.8.2-2 and A.14.1.8.2-3. The test consists of two successive time periods, with time duration of T1 and T2, respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2. At 4s after the start of T2, the UE location is changed such that the distance to the reference location broadcasted in SIB19 of Cell 1 is exceeded by the configured value in *distanceThresh* plus 50m.

Table A.14.1.8.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.1.8.2-2: General test parameters for inter frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
T2 end condition	Active cell		1, 2	Cell2	
	Neighbour cells		1, 2	Cell1	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 ms	Asynchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2		s	1, 2	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.14.1.8.2-3: Cell specific test parameters for inter frequency NR cell re-selection test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Satellite information		SSC.1 for Config 1 SSC.2 for Config 2		NSC.1 for Config 1 NSC.2 for Config 2	
PDSCH RMC configuration		SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET configuration		CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET configuration		CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		ULBWP.0.1		ULBWP.0.1	
SSB configuration		SSB.1 FR1		SSB.1 FR1	
SMTC configuration		#1: SMTC.1 for Cell 1 and Cell 2		#1: SMTC.1 for Cell 1 and Cell 2	
RLM-RS		SSB		SSB	
Qrxlevmin	dBm/SCS	-130		-130	
Pcompensation	dB	0		0	
Qhyst _s	dB	0		0	
Qoffset _{s, n}	dB	0		0	
Cell_selection_and_reselection_quality_measurement		SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	16	-3.11	-infinity	2.79

N_{oc} Note2	dBm/SCS	-98			
N_{oc} Note2	dBm/15 kHz	-98			
$\hat{E}_s / N_{oc}$	dB	16	13	-infinity	16
SS-RSRP Note3	dBm/SCS	-82	-85	-infinity	-82
Io	dBm/9.36 MHz	-53.94	-52.21	Same as parameters specified in Cell 1 columns-	
Treselection	s	0	0	0	0
SintersearchP	dB	40		40	
Propagation Condition		AWGN			

A.14.1.8.3 Test Requirements

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a lower priority cell shall be less than [36] s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{evaluate, NR_inter}}$ See Table 4.2C.2.4-1 in clause 4.2C.2.4

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case provided that SIB1 and SIB19 are scheduled with 80ms period.

A.14.1.9 Cell reselection to FR1 inter-frequency NR case for UE fulfilling low mobility relaxed measurement criterion

A.14.1.9.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2C.2.8, for UE fulfilling low mobility relaxed measurement criterion.

A.14.1.9.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.14.1.9.2-1, A.14.1.9.2-2 and A.14.1.9.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas and Cell 2 is of higher priority than Cell 1.

As specified in the Test Purpose, the UE is configured with the relaxed measurement criterion for UE with low mobility defined in clause 5.2.4.9.1 in TS 38.304 [1]. So, Cell 2 and Cell 1 configure the UE as follows:

lowMobilityEvaluation TS 38.331 [2] criterion is configured according to the parameters listed in Table A.14.1.9.2-3;

cellEdgeEvaluation TS 38.331 [2] criterion is not configured;

combineRelaxedMeasCondition TS 38.331 [2] is not configured;

Table A.14.1.9.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.1.9.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case for UE fulfilling low mobility criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell 2 in the initial phase, it fulfills Low Mobility relaxation measurements criterion, and during T1 period the UE reselects to cell 1
	Neighbour cells		1, 2	Cell1	
T1 end condition	Active cell		1, 2	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2	Cell2	
T2 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to cell 2 with higher priority during T2
	Neighbour cells		1, 2	Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 ms	Asynchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB Configuration			1, 2	SSB.1 FR1	
SMTC configuration			1, 2	SMTC pattern 2	Configured in SIB4 of Cell 1
				SMTC pattern 6	Configured in SIB4 of Cell 2
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	25 s	T1 is defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2	25 s	T2 is defined so that cell re-selection reaction time is taken into account.

Table A.14.1.9.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN for UE fulfilling low mobility criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2	-140		-140	
Pcompensation	dB	1, 2	0		0	
Qhysts	dB	1, 2	0		0	
Qoffsets, n	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{\alpha}$	dB	1, 2	14	14	-4	12
N_{oc} Note2	dBm/SCS	1, 2	-98			
N_{oc} Note2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s / N_{oc}$	dB	1, 2	14	14	-4	12
SS-RSRP Note3	dBm/SCS	1, 2	-84	-84	-102	-86
Io	dBm/9.36 MHz	1, 2	-55.88	-55.88	-68.60	-57.78
Treselection	s	1, 2	0	0	0	0
SnonintersearchP	dB	1, 2	Not sent		Not sent	
Threshx, highP	dB	1, 2	48		48	
Threshserving, lowP	dB	1, 2	44		44	
Threshx, lowP	dB	1, 2	50		50	
SSearchDeltaP	dB	1, 2	3		3	
TSearchDeltaP	s	1, 2	5		5	
Propagation Condition		1, 2	AWGN			
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.14.1.9.3 Test Requirements

The cell reselection delay to an already detected lower priority cell for UE fulfilling low mobility relaxed measurements is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to a lower priority cell for UE fulfilling low mobility relaxed measurements shall be less than 17s.

The cell reselection delay to an already detected higher priority cell for UE fulfilling low mobility relaxed measurements is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected higher priority cell for UE fulfilling low mobility relaxed measurements shall be less than 17s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a known lower priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{evaluate, NR_inter}}$ See Table 4.2.2.10.2-1 in clause 4.2.2.10.2

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 16.64s, allow 17s for the cell re-selection delay to an already detected lower priority cell and 16.64s for the cell re-selection delay to an already detected higher priority cell, which we allow 17s for UE fulfilling low mobility relaxed measurements in the test case.

A.14.1.10 Cell reselection to FR1 inter-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion

A.14.1.10.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2C.2.8, for UE fulfilling not-at-cell edge relaxed measurement criterion.

A.14.1.10.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.14.1.10.2-1, A.14.1.10.2-2 and A.14.1.10.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both Cell 1 and Cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas and Cell 2 is of higher priority than Cell 1.

As specified in the Test Purpose, the UE is configured with the relaxed measurement criterion for UE not-at-cell edge as defined in clause 5.2.4.9.2 in TS 38.304 [1]. So, Cell 2 and Cell 1 configures the UE as follows:

cellEdgeEvaluation TS 38.331 [2] criterion is configured according to the parameters listed in Table A.14.1.9.2-3;

lowMobilityEvaluation TS 38.331 [2] criterion is not configured;

combineRelaxedMeasCondition TS 38.331 [2] is not configured;

Table A.14.1.10.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.1.10.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case for UE fulfilling not-at-cell edge criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on Cell 2 in the initial phase, it fulfills Not-at-cell edge relaxation measurements criterion, and during T1 period the UE reselects to Cell 1
	Neighbour cells		1, 2	Cell1	
T1 end condition	Active cell		1, 2	Cell1	The UE shall perform reselection to Cell 1 during T1
	Neighbour cells		1, 2	Cell2	
T2 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to Cell 2 with higher priority during T2
	Neighbour cells		1, 2	Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 ms	Asynchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB Configuration			1, 2	SSB.1 FR1	
SMTC configuration			1, 2	SMTC pattern 2	Configured in SIB4 of Cell 1
				SMTC pattern 6	Configured in SIB4 of Cell 2
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	20 s	T1 is defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2	20 s	T2 is defined so that cell re-selection reaction time is taken into account.

Table A.14.1.10.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN for UE fulfilling not-at-cell edge criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		SR.1.1 FDD	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		CR.1.1 FDD	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		CCR.1.1 FDD	
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Q _{rxlevmin}	dBm/SCS	1, 2	-140		-140	
P _{compensation}	dB	1, 2	0		0	
Q _{hyst_s}	dB	1, 2	0		0	
Q _{offset_{s, n}}	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{at}$	dB	1, 2	14	14	-4	12
N_{oc} ^{Note2}	dBm/SCS	1, 2	-98			
N_{oc} ^{Note2}	dBm/15 kHz	1, 2	-98			
$\hat{E}_s / N_{oc}$	dB	1, 2	14	14	-4	12
SS-RSRP ^{Note3}	dBm/SCS	1, 2	-84	-84	-102	-86
I _o	dBm/9.36 MHz	1, 2	-55.88	-55.88	-68.60	-57.78
Treselection	s	1, 2	0	0	0	0
S _{nonintersearchP}	dB	1, 2	Not sent		Not sent	
Thresh _{x, highP}	dB	1, 2	48		48	
Thresh _{serving, lowP}	dB	1, 2	44		44	
Thresh _{x, lowP}	dB	1, 2	50		50	
S _{SearchThresholdP}	dB	1, 2	50		50	
S _{SearchThresholdQ}	s	1, 2	Not Configured			
Propagation Condition		1, 2	AWGN			
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.14.1.10.3 Test Requirements

The cell reselection delay to an already detected lower priority cell for UE fulfilling not-at-cell edge relaxed measurements is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected lower priority cell for UE fulfilling not-at-cell edge relaxed measurements shall be less than 17s.

The cell reselection delay to an already detected higher priority cell for UE fulfilling not-at-cell-edge relaxed measurements is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the RRCSetupRequest message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected higher priority cell for UE fulfilling not-at-cell-edge relaxed measurements shall be less than 17s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{evaluate, NR_inter}}$ See Table 4.2.2.10.3-1 in clause 4.2.2.10

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 16.64s, allow 17s for the cell re-selection delay to an already detected lower priority cell and 16.64s for the cell re-selection delay to an already higher priority cell, which we allow 17s for UE fulfilling not-at-cell edge relaxed measurements in the test case.

A.14.2 RRC_CONNECTED state mobility

A.14.2.1 Handover

A.14.2.1.1 Intra-frequency SAN Handover from FR1 to FR1

A.14.2.1.1.1 Test Purpose and Environment

This test is to verify the requirement for Intra-frequency SAN Handover from FR1 to FR1 specified in clause 6.1C.1.

A.14.2.1.1.2 Test Parameters

The test scenario comprises of 1 NR FDD carrier and 2 cells as given in table A.14.2.1.1.2-1, A.14.2.1.1.2-2, and A.14.2.1.1.2-3. Both handover delay and interruption length are tested.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. During T1, the UE is configured to measure intra-frequency neighbour cell with Event A3 report.

Starting T2, cell 2 becomes detectable and offset better than cell 1. The RRC message implying handover to cell 2 shall be sent to the UE during period T2, after the UE has reported Event A3. The start of T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.14.2.1.1.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note: If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.	

Table A.14.2.1.1.2-2: General test parameters Intra-frequency SAN handover from FR1 to FR1

Parameter	Unit	Value	Comment
RF Channel Number		1	One NR NTN satellite RF channel
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
Satellite configuration	Config 1	RMC in [A.x]	For GSO satellites configuration
	Config 2	RMC in [A.x]	For NGSO satellites configuration
UE position (N,S, H)		[(0, 0, 0)]	Set by AT command
A3-Offset	dB	0	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 5	
T3	s	1	

Table A.14.2.1.1.2-3: Cell specific test parameters for Intra frequency SAN handover test case

Parameter		Test configuration	Unit	Cell 1			Cell 2		
				T1	T2	T3	T1	T2	T3
NR RF Channel Number		Config 1,2		1			1		
BW _{channel}			MHz	10: N _{RB,c} = 52			10: N _{RB,c} = 52		
BWP BW			MHz	10: N _{RB,c} = 52			10: N _{RB,c} = 52		
TA _{Common}		Config 1,2	s	0			0		
TA _{CommonDrift}			s	0			0		
TA _{CommonDriftVariation}			s	0			0		
K _{offset}		Config 1	ms	[239]			[239]		
		Config 2		[4]			[4]		
K _{mac}		Config 1,2	ms	0			0		
DRx Cycle			ms	Not Applicable					
PDSCH Reference measurement channel				SR.1.1 FDD					
CORESET Reference Channel				CR.1.1 FDD					
TRS configuration				TRS.1.1 FDD					
OCNG Patterns				OP.1					
SMTC Configuration				SMTC.1					
SSB Configuration				SSB.1 FR1					
PDSCH/PDCCH subcarrier spacing			kHz	15 kHz					
PUCCH/PUSCH subcarrier spacing			kHz	15 kHz					
PRACH configuration				FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP	Config 1,2		DLBWP.0.1					
	Dedicated DL BWP			DLBWP.1.1					
	Initial UL BWP			ULBWP.0.1					
	Dedicated UL BWP			ULBWP.1.1					
EPRE ratio of PSS to SSS		Config 1,2	dB	0					
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									

EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc}^{Note2}	Config 1,2	dBm/15kHz	-98					
N_{oc}^{Note2}		dBm/SCS	-98					
$\hat{E}_s/I_{ot}$		dB	8	-3.3	-3.3	-Infinity	2.36	2.36
$\hat{E}_s/N_{oc}$		dB	8	8	8	-Infinity	11	11
SSB_RP		dBm/SCS	-90	-90	-90	-Infinity	-87	-87
I_0^{Note3}		dBm/9.36MHz	-61.41	-57.06	-57.06	-61.41	-57.06	-57.06
Propagation condition		-	AWGN			AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								

A.14.2.1.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2]. $T_{interrupt}$ is defined in clause 6.1C.1.2.2.

$$T_{interrupt} = T_{search} + T_{IU} + T_{processing} + T_{\Delta} + T_{margin} \text{ ms}$$

Here: $T_{search} = 0$; $T_{IU} = 20\text{ms}$; $T_{processing} = 20\text{ms}$; $T_{\Delta} = 20\text{ms}$; $T_{margin} = 2\text{ms}$.

This gives a total of 72 ms.

A.14.2.1.2 Inter-frequency SAN Handover from FR1 to FR1

A.14.2.1.2.1 Test Purpose and Environment

This test is to verify the requirement for Inter-frequency SAN Handover from FR1 to FR1 specified in clause 6.1C.1.

A.14.2.1.2.2 Test Parameters

The test scenario comprises of 2 NR FDD carriers and one cell on each carrier as given in table A.14.2.1.2.2-1, A.14.2.1.2.2-2 and A.14.2.1.2.2-3. Both handover delay and interruption length are tested.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. During T1, the UE is configured to measure inter frequency neighbour cell with Event A3 report and a gap patterns are configured in the test case.

Starting T2, cell 2 becomes detectable and offset better than cell 1. The RRC message implying handover to cell 2 shall be sent to the UE during period T2, after the UE has reported Event A3. The start of T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.14.2.1.2.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note: If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.	

Table A.14.2.1.2.2-2: General test parameters Inter-frequency SAN handover from FR1 to FR1

Parameter	Unit	Value	Comment
RF Channel Number		1, 2	Two NR NTN satellite RF channel
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
Satellite configuration	Config 1	RMC in [A.x]	For GSO satellite configuration
	Config 2	RMC in [A.x]	For NGSO satellite configuration
UE position (N,S, H)		[(0, 0, 0)]	Set by AT command
A3-Offset	dB	0	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 5	
T3	s	1	

Table A.14.2.1.2.2-3: Cell specific test parameters for Inter frequency SAN handover test case

Parameter	Test configurat ion	Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number	Config 1,2		1			2		
BW _{channel}		MHz	10: N _{RB,c} = 52			10: N _{RB,c} = 52		
BWP BW		MHz	10: N _{RB,c} = 52			10: N _{RB,c} = 52		
TA _{Common}	Config 1,2	s	0			0		
TA _{CommonDrift}		s	0			0		
TA _{CommonDriftVariation}		s	0			0		
K _{offset}	Config 1	ms	[239]			[239]		
	Config 2		[4]			[4]		
K _{mac}	Config 1,2	ms	0			0		
DRx Cycle		ms	Not Applicable					

PDSCH Reference measurement channel				SR.1.1 FDD						
CORESET Reference Channel				CR.1.1 FDD						
TRS configuration				TRS.1.1 FDD						
OCNG Patterns				OP.1						
SMTc Configuration				SMTc.1						
SSB Configuration				SSB.1 FR1						
PDSCH/PDCCH subcarrier spacing			kHz	15 kHz						
PUCCH/PUSCH subcarrier spacing			kHz	15 kHz						
PRACH configuration				FR1 PRACH configuration 1						
BWP configuration	Initial DL BWP	Config 1,2		DLBWP.0.1						
	Dedicated DL BWP			DLBWP.1.1						
	Initial UL BWP			ULBWP.0.1						
	Dedicated UL BWP			ULBWP.1.1						
EPRE ratio of PSS to SSS		Config 1,2	dB	0						
EPRE ratio of PBCH DMRS to SSS										
EPRE ratio of PBCH to PBCH DMRS										
EPRE ratio of PDCCH DMRS to SSS										
EPRE ratio of PDCCH to PDCCH DMRS										
EPRE ratio of PDSCH DMRS to SSS										
EPRE ratio of PDSCH to PDSCH										
EPRE ratio of OCNG DMRS to SSS(Note 1)										
EPRE ratio of OCNG to OCNG DMRS (Note 1)										
N_{oc}^{Note2}		Config 1,2	dBm/15kHz	-98						
N_{oc}^{Note2}			dBm/SCS	-98						
$\hat{E}_s/I_{ot}$			dB	4	4	4	-Infinity	9	9	
$\hat{E}_s/N_{oc}$			dB	4	4	4	-Infinity	9	9	
SSB_RP			dBm/SCS	-94	-94	-94	-Infinity	-89	-89	
I_0 Note3			dBm/9.36MHz	-64.59	-64.59	-64.59	-70.05	-60.53	-60.53	
Propagation condition			-	AWGN				AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.										
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.										
Note 3: I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.										

A.14.2.1.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2]. $T_{\text{interrupt}}$ is defined in clause 6.1C.1.2.2.

$$T_{\text{interrupt}} = T_{\text{search}} + T_{\text{IU}} + T_{\text{processing}} + T_{\Delta} + T_{\text{margin}} \text{ ms}$$

Here: $T_{\text{search}} = 0$; $T_{\text{IU}} = 20\text{ms}$; $T_{\text{processing}} = 20\text{ms}$; $T_{\Delta} = 20\text{ms}$; $T_{\text{margin}} = 2\text{ms}$.

This gives a total of 72 ms.

A.14.2.1.3 Intra-frequency SAN time-based conditional Handover from FR1 to FR1

A.14.2.1.3.1 Test Purpose and Environment

This test is to verify the requirement for intra-frequency SAN time-based conditional handover from FR1 to FR1 specified in clause 6.1C.2.

A.14.2.1.3.2 Test Parameters

The test scenario comprises of 1 NR FDD carrier and 2 cells as given in table A.14.2.1.3.2-1, and A.14.2.1.3.2-2. Both handover delay and interruption length are tested.

The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. During T1, the UE is configured to measure intra-frequency neighbour cell. The RRC message implying time-based handover to cell 2 with Event CondEvent T1 shall be sent to UE, at a time earlier than T_{RRC} (10ms) before the beginning of T2.

Starting T2, cell 2 becomes detectable and offset better than cell 1 and time condition event t1-Threshold-r17 is fulfilled.

Table A.14.2.1.3.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note: If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.	

Table A.14.2.1.3.2-2: General test parameters for Intra-frequency SAN time-based conditional handover from FR1 to FR1

Parameter	Unit	Value	Comment
RF Channel Number		1	One NR NTN satellite RF channel
Initial conditions	Active cell	Cell 1	FDD duplex mode cell
	Neighbouring cell	Cell 2	FDD duplex mode cell
Final condition	Active cell	Cell 2	
Satellite configuration	Config 1	RMC in [A.x]	For GSO satellite configuration
	Config 2	RMC in [A.x]	For NGSO satellite configuration
UE position (N,S, H)		[(0, 0, 0)]	Set by AT command
t1-Threshold-r17.condEventT1-r17	s	T2	Entering condition
duration-r17.condEventT1-r17	slot	1000	Give 1s search duration
A3-Offset in condition	dB	0	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.

Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 2	

Table A.14.2.1.3.2-3: Cell specific test parameters for Intra-frequency SAN time-based conditional handover from FR1 to FR1

Parameter		Test configuration	Unit	Cell 1		Cell 2		
				T1	T2	T1	T2	
NR RF Channel Number		Config 1,2		1		1		
BW _{channel}			MHz	10: N _{RB,c} = 52		10: N _{RB,c} = 52		
BWP BW			MHz	10: N _{RB,c} = 52		10: N _{RB,c} = 52		
TA _{Common}		Config 1,2	s	0		0		
TA _{CommonDrift}			s	0		0		
TA _{CommonDriftVariation}			s	0		0		
K _{offset}		Config 1	ms	[239]		[239]		
		Config 2	ms	[4]		[4]		
K _{mac}		Config 1,2	ms	0		0		
DRX Cycle			ms	Not Applicable				
PDSCH Reference measurement channel				SR.1.1 FDD				
CORESET Reference Channel				CR.1.1 FDD				
TRS configuration				TRS.1.1 FDD				
OCNG Patterns				OP.1				
SMTC Configuration				SMTC.1				
SSB Configuration				SSB.1 FR1				
PDSCH/PDCCH subcarrier spacing			kHz	15 kHz				
PUCCH/PUSCH subcarrier spacing			kHz	15 kHz				
PRACH configuration				FR1 PRACH configuration 1				
BWP configuration	Initial DL BWP	Config 1,2		DLBWP.0.1				
	Dedicated DL BWP			DLBWP.1.1				
	Initial UL BWP			ULBWP.0.1				
	Dedicated UL BWP			ULBWP.1.1				
EPRE ratio of PSS to SSS		Config 1,2	dB	0				
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)		Config 1,2	dBm/15kHz	-98				
N_{oc}^{Note2}								
N_{oc}^{Note2}				dBm/SCS	-98			
$\hat{E}_s/I_{ot}$								
$\hat{E}_s/N_{oc}$				dB	8	-3.3	-Infinity	2.36
SSB _{RP}					dBm/SCS	-90	-90	-Infinity
I_o^{Note3}				dBm/9.36MHz		-61.41	-57.06	-61.41
Propagation condition					-	AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OEDM symbols.								

- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 3: β_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.2.1.3.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 872 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay is defined in clause 6.1C.2, can be expressed as:

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

where:

RRC procedure delay $T_{RRC} = 10$ ms and is specified in clause 12 in TS 38.331 [2].

T_{Event_DU} = start of T2

$T_{measure} = 600 + 200$ ms; $T_{interrupt} = 62$ ms; $T_{CHO_execution} = 10$ ms.

This gives a total of 872 ms.

A.14.2.1.4 Inter-frequency SAN time-based conditional Handover from FR1 to FR1

A.14.2.1.4.1 Test Purpose and Environment

This test is to verify the requirement for inter -frequency SAN time-based conditional handover from FR1 to FR1 specified in clause 6.1C.2.

A.14.2.1.4.2 Test Parameters

The test scenario comprises of 2 NR FDD carrier and one cell on each carrier as given in table A.14.2.1.4.2-1, and A.14.2.1.4.2-2. Both handover delay and interruption length are tested.

The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. During T1, the UE is configured to measure inter-frequency neighbour cell and Gap pattern ID gp0. The RRC message implying time-based handover to cell 2 with Event CondEvent T1 shall be sent to UE, at a time earlier than T_{RRC} (10ms) before the beginning of T2.

Starting T2, cell 2 becomes detectable and offset better than cell 1 and after 1000ms of T2, time condition event t1-Threshold-r17 is fulfilled.

Table A.14.2.1.4.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note:	If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.

Table A.14.2.1.4.2-2: General test parameters for Inter-frequency SAN time-based conditional handover from FR1 to FR1

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two NR NTN satellite RF channel
Initial conditions	Active cell		Cell 1	FDD duplex mode cell
	Neighbouring cell		Cell 2	FDD duplex mode cell
Final condition	Active cell		Cell 2	
Satellite configuration	Config 1		RMC in [A.x]	For GSO satellite configuration
	Config 2		RMC in [A.x]	For NGSO satellite configuration
UE position (N,S, H)			[(0, 0, 0)]	Set by AT command
t1-Threshold-r17.condEventT1-r17		s	T2	Entering condition
duration-r17.condEventT1-r17		slot	1000	Give 1s search duration
A3-Offset in condition		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μ s	Synchronous cells
T1		s	5	
T2		s	≤ 2	

Table A.14.2.1.4.2-3: Cell specific test parameters for Inter-frequency SAN time-based conditional handover from FR1 to FR1

Parameter		Test configuration	Unit	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number		Config 1, 2		1	2		
BW _{channel}			MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52		
BWP BW			MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52		
TA _{Common}		Config 1, 2	s	0	0		
TA _{CommonDrift}			s	0	0		
TA _{CommonDriftVariation}			s	0	0		
K _{offset}		Config 1	ms	[239]	[239]		
		Config 2	ms	[4]	[4]		
K _{mac}		Config 1, 2	ms	0	0		
DRX Cycle			ms	Not Applicable			
PDSCH Reference measurement channel				SR.1.1 FDD			
CORESET Reference Channel				CR.1.1 FDD			
TRS configuration				TRS.1.1 FDD			
OCNG Patterns				OP.1			
SMTC Configuration				SMTC.1			
SSB Configuration				SSB.1 FR1			
PDSCH/PDCCH subcarrier spacing			kHz	15 kHz			
PUCCH/PUSCH subcarrier spacing			kHz	15 kHz			
PRACH configuration				FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		Config 1, 2		DLBWP.0.1		
	Dedicated DL BWP				DLBWP.1.1		
	Initial UL BWP				ULBWP.0.1		
	Dedicated UL BWP				ULBWP.1.1		
EPRE ratio of PSS to SSS		Config 1, 2	dB	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							

EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	Config 1, 2	dBm/15kHz	-98			
N_{oc}^{Note2}		dBm/SCS	-98			
$\hat{E}_s/I_{ot}$		dB	4	4	-Infinity	9
$\hat{E}_s/N_{oc}$		dB	4	4	-Infinity	9
SSB_RP		dBm/SCS	-94	-94	-Infinity	-89
I_o^{Note3}		dBm/9.36MHz	-64.59	-64.59	-70.05	-60.53
Propagation condition		-	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.14.2.1.4.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 l later than 1000ms and less than 1072 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay is defined in clause 6.1C.2, can be expressed as:

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

where:

RRC procedure delay $T_{RRC} = 10$ ms and is specified in clause 12 in TS 38.331 [2].

$T_{Event_DU} = \text{start of T2}$

$T_{measure} = \max(600 + 200, 1000)$ ms; $T_{interrupt} = 62$ ms; $T_{CHO_execution} = 10$ ms.

This gives a total of 1072 ms.

A.14.2.1.5 Intra-frequency SAN distance-based conditional Handover from FR1 to FR1

A.14.2.1.5.1 Test Purpose and Environment

This test is to verify the requirement for intra-frequency SAN distance-based conditional handover from FR1 to FR1 specified in clause 6.1C.2.

A.14.2.1.5.2 Test Parameters

The test scenario comprises of 1 NR FDD carrier and 2 cells as given in table A.14.2.1.5.2-1, and A.14.2.1.5.2-2. Both handover delay and interruption length are tested.

The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. During T1, the UE is configured to measure intra-frequency neighbour cell. The RRC message implying distance-based handover to cell 2 with Event D1 shall be sent to UE, at a time earlier than T_{RRC} (10ms) before the beginning of T2.

Starting T2, cell 2 becomes detectable and offset better than cell 1 and location condition event condEventD1-r17 is fulfilled.

Table A.14.2.1.5.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note: If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.	

Table A.14.2.1.5.2-2: General test parameters for Intra-frequency SAN distance-based conditional handover from FR1 to FR1

Parameter	Unit	Value	Comment
RF Channel Number		1	One NR NTN satellite RF channel
Initial conditions	Active cell	Cell 1	FDD duplex mode cell
	Neighbouring cell	Cell 2	FDD duplex mode cell
Final condition	Active cell	Cell 2	
Satellite configuration	Config 1	RMC in [A.x]	For GSO satellite configuration
	Config 2	RMC in [A.x]	For NGSO satellite configuration
UE position (N,S, H) at T1 start		[(0, 0, 0)]	Set by AT command
UE moving speed	km/h	[(108, 0, 0)]	Set by AT command
referenceLocation1-r17.condEventD1-r17	m	[(-700, 0, 0)]	Reference location for serving cell
referenceLocation2-r17.condEventD1-r17	m	[(1300, 0, 0)]	Reference location for target cell
distanceThreshFromReference1-r17.condEventD1-r17	50m	[20]	D1-1 Location condition is fulfilled at T2
distanceThreshFromReference2-r17.condEventD1-r17	50m	[20]	D1-2 Location condition is fulfilled at T2
hysteresis-r17.condEventD1-r17	10m	0	
timeToTrigger-r17.condEventD1-r17	s	0	
A3-Offset in condition	dB	0	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	12	
T2	s	≤ 6	

Table A.14.2.1.5.2-3: Cell specific test parameters for Intra-frequency SAN distance-based conditional handover from FR1 to FR1

Parameter	Test configuration	Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number	Config 1, 2		1		1	

BW _{channel}			MHz	10: N _{RB,c} = 52		10: N _{RB,c} = 52		
BWP BW			MHz	10: N _{RB,c} = 52		10: N _{RB,c} = 52		
TA _{Common}			s	0		0		
TA _{CommonDrift}			s	0		0		
TA _{CommonDriftVariation}			s	0		0		
K _{offset}		Config 1	ms	[239]		[239]		
		Config 2	ms	[4]		[4]		
K _{mac}		Config 1, 2	ms	0		0		
DRX Cycle			ms	Not Applicable				
PDSCH Reference measurement channel				SR.1.1 FDD				
CORESET Reference Channel				CR.1.1 FDD				
TRS configuration				TRS.1.1 FDD				
OCNG Patterns				OP.1				
SMTc Configuration				SMTc.1				
SSB Configuration				SSB.1 FR1				
PDSCH/PDCCH subcarrier spacing			kHz	15 kHz				
PUCCH/PUSCH subcarrier spacing			kHz	15 kHz				
PRACH configuration				FR1 PRACH configuration 1				
BWP configuration	Initial DL BWP		Config 1, 2		DLBWP.0.1			
	Dedicated DL BWP				DLBWP.1.1			
	Initial UL BWP				ULBWP.0.1			
	Dedicated UL BWP				ULBWP.1.1			
EPRE ratio of PSS to SSS		Config 1, 2	dB	0				
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N _{oc} ^{Note2}		Config 1, 2	dBm/15kHz	-98				
N _{oc} ^{Note2}			dBm/SCS	-98				
$\hat{E}_s/I_{ot}$			dB	8	-3.3	-Infinity	2.36	
$\hat{E}_s/N_{oc}$			dB	8	8	-Infinity	11	
SSB _{RP}			dBm/SCS	-90	-90	-Infinity	-87	
I _o ^{Note3}			dBm/9.36MHz	-61.41	-57.06	-61.41	-57.06	
Propagation condition			-	AWGN				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.								
Note 3: I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								

A.14.2.1.5.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 872 ms from the beginning of time period T2. The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay is defined in clause 6.1C.2, can be expressed as:

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

where:

RRC procedure delay $T_{RRC} = 10$ ms and is specified in clause 12 in TS 38.331 [2].

T_{Event_DU} = start of T2

UE moving speed, $v = (108\text{km/h} \cdot 1000/3600) = 30\text{m/s}$.

At start of T2,

distance to source cell reference location is $30\text{ m/s} \cdot 12\text{ s} - (-700)\text{m} = 1060\text{m}$, and D1-1 = 1000m

distance to target cell reference location is $30\text{ m/s} \cdot 12\text{ s} - 1300\text{m} = -940\text{m}$, and D1-2 = 1000m

i.e. D1-1 and D1-2 conditions are fulfilled at start of T2 with $\geq 50\text{m}$ location margin.

$T_{measure} = \max(600 + 200\text{ ms}, 0) = 800\text{ ms}$;

$T_{interrupt} = 62\text{ms}$; $T_{CHO_execution} = 10\text{ms}$.

This gives a total of $800\text{ms} + 62\text{ms} + 10\text{ms} = 872\text{ ms}$.

A.14.2.1.6 Inter-frequency SAN distance-based conditional Handover from FR1 to FR1

A.14.2.1.6.1 Test Purpose and Environment

This test is to verify the requirement for inter -frequency SAN distance-based conditional handover from FR1 to FR1 specified in clause 6.1C.2.

A.14.2.1.6.2 Test Parameters

The test scenario comprises of 2 NR FDD carrier and one cell on each carrier as given in table A.14.2.1.6.2-1, and A.14.2.1.6.2-2. Both handover delay and interruption length are tested.

The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2. During T1, the UE is configured to measure inter-frequency neighbour cell and Gap pattern ID gp0. The RRC message implying distance-based handover to cell 2 with Event D1 shall be sent to UE, at a time earlier than T_{RRC} (10ms) before the beginning of T2.

Starting T2, cell 2 becomes detectable and offset better than cell 1 and after 11670ms of T2, location condition event condEventD1-r17 is fulfilled.

Table A.14.2.1.6.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
2	NGSO, NR FDD, 15kHz SSB SCS, 10 MHz BW
Note:	If UE supports both NGSO and GSO, the GSO-based test cases can be skipped if the UE passes NGSO-based test cases.

Table A.14.2.1.6.2-2: General test parameters for Inter -frequency SAN distance-based conditional handover from FR1 to FR1

Parameter		Unit	Value	Comment
RF Channel Number			1, 2	Two NR NTN satellite RF channel
Initial conditions	Active cell		Cell 1	FDD duplex mode cell
	Neighbouring cell		Cell 2	FDD duplex mode cell
Final condition	Active cell		Cell 2	
Satellite configuration	Config 1		RMC in [A.x]	For GSO satellite configuration
	Config 2		RMC in [A.x]	For NGSO satellite configuration
UE position (N,S, H) at T1 start			[(0, 0, 0)]	Set by AT command
UE moving speed		km/h	[(108, 0, 0)]	Set by AT command
referenceLocation1-r17.condEventD1-r17		m	[(-700, 0, 0)]	Reference location for serving cell
referenceLocation2-r17.condEventD1-r17		m	[(1300, 0, 0)]	Reference location for target cell
distanceThreshFromReference1-r17.condEventD1-r17		50m	[20]	D1-1 Location condition is fulfilled at T2
distanceThreshFromReference2-r17.condEventD1-r17		50m	[20]	D1-2 Location condition is fulfilled at T2
hysteresis-r17.condEventD1-r17		10m	0	
timeToTrigger-r17.condEventD1-r17		s	0	
A3-Offset in condition		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μ s	Synchronous cells
T1		s	1	
T2		s	12	

Table A.14.2.1.6.2-3: Cell specific test parameters for Inter-frequency SAN distance-based conditional handover from FR1 to FR1

Parameter	Test configuration	Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number	Config 1, 2		1		2	
BW _{channel}		MHz	10: N _{RB,c} = 52		10: N _{RB,c} = 52	
BWP BW		MHz	10: N _{RB,c} = 52		10: N _{RB,c} = 52	
TA _{Common}	Config 1, 2	s	0		0	
TA _{CommonDrift}		s	0		0	
TA _{CommonDriftVariation}		s	0		0	
K _{offset}	Config 1	ms	[239]		[239]	
	Config 2	ms	[4]		[4]	
K _{mac}	Config 1, 2	ms	0		0	
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR.1.1 FDD			
CORESET Reference Channel			CR.1.1 FDD			
TRS configuration			TRS.1.1 FDD			
OCNG Patterns			OP.1			
SMTc Configuration			SMTc.1			
SSB Configuration			SSB.1 FR1			
PDSCH/PDCCH subcarrier spacing		kHz	15 kHz			
PUCCH/PUSCH subcarrier spacing		kHz	15 kHz			
PRACH configuration			FR1 PRACH configuration 1			

BWP configuration	Initial DL BWP	Config 1, 2		DLBWP.0.1			
	Dedicated DL BWP			DLBWP.1.1			
	Initial UL BWP			ULBWP.0.1			
	Dedicated UL BWP			ULBWP.1.1			
EPRE ratio of PSS to SSS		Config 1, 2	dB	0			
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}		Config 1, 2	dBm/15kHz	-98			
N_{oc}^{Note2}			dBm/SCS	-98			
$\hat{E}_s/I_{ot}$			dB	4	4	-Infinity	9
$\hat{E}_s/N_{oc}$			dB	4	4	-Infinity	9
SSB_RP			dBm/SCS	-94	-94	-Infinity	-89
I_o^{Note3}			dBm/9.36MHz	-64.59	-64.59	-70.05	-60.53
Propagation condition			-	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.14.2.1.6.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 later than 11670ms and less than 11741 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay is defined in clause 6.1C.2, can be expressed as:

$$D_{CHO} = T_{RRC} + T_{Event_DU} + T_{measure} + T_{interrupt} + T_{CHO_execution}$$

where:

RRC procedure delay $T_{RRC} = 10$ ms and is specified in clause 12 in TS 38.331 [2].

T_{Event_DU} = start of T2

UE moving speed, $v = (108\text{km/h} * 1000 / 3600) = 30\text{m/s}$.

At 11670ms after start of T2,

distance to source cell reference location is $30 \text{ m/s} * 11.67 \text{ s} - (-700)\text{m} = 1050\text{m}$, and $D1-1 = 1000\text{m}$

distance to target cell reference location is $30 \text{ m/s} * 11.67 \text{ s} - 1300\text{m} = -950\text{m}$, and $D1-2 = 1000\text{m}$

i.e. $D1-1$ and $D1-2$ conditions are fulfilled at $T2 + 11670\text{ms}$ with $\geq 50\text{m}$ location margin.

$T_{\text{measure}} = \max(600 + 200 \text{ ms}, 11670\text{ms}) = 11670\text{ms}$;

$T_{\text{interrupt}} = 62\text{ms}$; $T_{\text{CHO_execution}} = 10\text{ms}$.

This gives a total of $11670\text{ms} + 62\text{ms} + 10\text{ms} = 11741 \text{ ms}$.

A.14.2.2 RRC Connection Mobility Control

A.14.2.2.1 SA: RRC Re-establishment for SAN

A.14.2.2.1.1 Intra-frequency RRC Re-establishment in FR1

A.14.2.2.1.1.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 with known target cell is within the specified limits. These tests will verify the requirements in clause 6.2C.1.

The test parameters are given in table A.14.2.2.1.1.1-1, table A.14.2.2.1.1.1-2 and table A.14.2.2.1.1.1-3 below. The test consists of 3 successive time periods, with time duration of $T1$, $T2$ and $T3$ respectively. At the start of time period $T2$, cell 1, which is the active cell, is deactivated. The time period $T3$ starts after the occurrence of the radio link failure.

The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

Table A.14.2.2.1.1.1-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.2.2.1.1.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
	Neighbour cells		1, 2	Cell2	
Final condition	Active cell		1, 2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1	3 ms	Asynchronous cells
N310		-	1, 2	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2	0	Radio link failure timer;
T311		ms	1, 2	3000	RRC re-establishment timer

Access Barring Information	-	1, 2	Not Sent	No additional delays in random access procedure.
SMTc configuration		1, 2	SMTc.2	
DRX cycle length	s	1, 2	OFF	
PRACH configuration		1, 2	FR1 PRACH configurati on 1	Table A.3.8.2.1-1
T1	s	1, 2	5	
T2	ms	1, 2	640	Time for the UE to detect RLF (Summation of $T_{\text{Evaluate_out_SSB}}$ defined in clause 8.1C in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1C.5 in TS 38.133)
T3	s	1, 2	2	

Table A.14.2.2.1.1.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Satellite information		1	SSC.1			NSC.1		
		2	SSC.2			NSC.2		
PDSCH RMC configuration		1, 2	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1, 2	TRS.1.1 FDD			TRS.1.1 FDD		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
Active DL BWP configuration		1, 2	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBW P.1.1
Active UL BWP configuration		1, 2	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBW P.1.1
SSB configuration		1, 2	SSB.1 FR1			SSB.1 FR1		
RLM-RS		1, 2	SSB			SSB		
$\hat{E}_s / I_{\text{ot}}$	dB	1, 2	1.54	-infinity	-infinity	-3.79	4	4
N_{oc} ^{Note2}	dBm/SCS	1, 2	-98					
N_{oc} ^{Note2}	dBm/15 kHz	1, 2	-98					
$\hat{E}_s / N_{\text{oc}}$	dB	1, 2	7	-infinity	-infinity	4	4	4
SS-RSRP ^{Note3}	dBm/SCS	1, 2	-91	-infinity	-infinity	-94	-94	-94
Io	dBm/9.36 MHz	1, 2	-60.74	-64.59	-64.59	-60.74	-64.59	-64.59
Propagation Condition		1, 2	AWGN					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.2.2.1.1.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to a known NR intra frequency cell shall be less than 1.6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 1$$

$$T_{\text{identify_intra_NR}} = 200 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$, provided that SIB1 and SIB19 are scheduled with 20ms period; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of [1545] ms, allow [1.6] s in the test case.

A.14.2.2.1.2 Inter-frequency RRC Re-establishment in FR1

A.14.2.2.1.2.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR1 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2C.1.

The test parameters are given in table A.14.2.2.1.2.1-1, table A.14.2.2.1.2.1-2 and table A.14.2.2.1.2.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

Table A.14.2.2.1.2.1-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.2.2.1.2.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
	Neighbour cells		1, 2	Cell2	
Final condition	Active cell		1, 2	Cell2	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 ms	Asynchronous cells
N310		-	1, 2	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2	0	Radio link failure timer;
T311		ms	1, 2	5000	RRC re-establishment timer
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.2	
DRX cycle length		s	1, 2	OFF	
PRACH configuration			1, 2	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1		s	1, 2	5	
T2		ms	1, 2	640	Time for the UE to detect RLF (Summation of T _{Evaluate_out_SSB} defined in clause 8.1C in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1C.5 in TS 38.133)
T3		s	1, 2	5	

Table A.14.2.2.1.2.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Satellite information		1	SSC.1			NSC.1		
		2	SSC.2			NSC.2		
RF Channel Number		1, 2	1			2		
PDSCH RMC configuration		1, 2	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD			CCR.1.1 FDD		

OCNG Pattern		1, 2	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1, 2	TRS.1.1 FDD			TRS.1.1 FDD		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
Active DL BWP configuration		1, 2	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBW P.1.1
Active UL BWP configuration		1, 2	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBW P.1.1
SSB configuration		1, 2	SSB.1 FR1			SSB.1 FR1		
RLM-RS		1, 2	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-infinity	-infinity	-infinity	-infinity	7
N_{oc} Note2	dBm/SCS	1, 2	-98					
N_{oc} Note2	dBm/15 kHz	1, 2	-98					
$\hat{E}_s/N_{oc}$	dB	1, 2	4	-infinity	-infinity	-infinity	-infinity	7
SS-RSRP Note3	dBm/SCS	1, 2	-94	-infinity	-infinity	-infinity	-infinity	-91
Io	dBm/9.36 MHz	1, 2	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26
Propagation Condition		1, 2	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.14.2.2.1.2.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 3 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 2$$

$$T_{\text{identify_intra_NR}} = 800 \text{ ms}$$

$$T_{\text{identify_inter_NR}} = 800 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$, provided that SIB1 and SIB19 are scheduled with 20ms period; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

$T_{\text{PRACH}} = 15$ ms; it is the additional delay caused by the random access procedure.

This gives a total of [2945] ms, allow [3] s in the test case.

A.14.2.2.2 Random Access

A.14.2.2.2.1 4-step RA type contention based random access test in FR1 for NR standalone

A.14.2.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2C.2.2 and Clause 7.1C.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.14.2.2.2.1.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.14.2.2.2.1.1-2.

Table A.14.3.2.2.1.1-1: Supported test configurations for contention based random access test for satellite access

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.2.2.2.1.1-2: General test parameters for contention based random access test for satellite access

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB pattern 1 in FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB pattern 2 in FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3.10
SS/PBCH block index			0,1	Different from the definition in A.3.10
Duplex Mode for Cell 1	Config 1		FDD	
	Config 2		FDD	
CSI-RS for tracking	Config 1, 2		TRS.1.1 FDD	
OCNG Pattern ^{Note 1}			OP.1	As defined in A.3.2.1.
PDSCH parameters ^{Note 4}	Config 1, 2		SR.1.1 FDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.1 FDD	
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		

EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1, 2	dBm/15kHz	-98	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP ^{Note 3}		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1, 2	dBm/15kHz	-98	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP ^{Note 3}		dBm/ SCS	-115	
I_0 ^{Note 2}		Config 1, 2	dBm	-65.3/9.36MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX, f, c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 1	As defined in A.3.8.
Propagation Condition			-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.					
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.					
Note 3: Void					
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.					

A.14.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.14.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2C.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2C.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1C.2.

A.14.2.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2C.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2C.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1C.2.

A.14.2.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2C.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2C.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1C.2.

A.14.2.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2C.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.14.2.2.2.1.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2C.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention

Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A.14.2.2.2.1.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2C.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.14.2.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2C.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.14.2.2.2.2 4-step RA type non-contention based random access test in FR1 for NR standalone

A.14.2.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2C.2.2 and Clause 7.1C.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.14.2.2.2.2.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.14.2.2.2.2.1-2 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.14.2.2.2.2.1-1: Supported test configurations for non-contention based random access test for satellite access

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.2.2.2.2.1-2: General test parameters for non-contention based random access test satellite access

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1		SSB pattern 1 in FR1	SSB pattern 1 in FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB pattern 2 in FR1	SSB pattern 2 in FR1	
Number of SSBs per SS-burst			2	2	Different from the definition in A.3.10

SS/PBCH block index				0,1	0,1	Different from the definition in A.3.10
CSI-RS Configuration	Config 1, 2			N/A	CSI-RS.1.1 FDD	As defined in A.3.1.4
Duplex Mode for Cell 1	Config 1, 2			FDD	FDD	
CSI-RS for tracking	Config 1, 2			TRS.1.1 FDD	TRS.1.1 FDD	
OCNG Pattern ^{Note 1}				OP.1	OP.1	As defined in A.3.2.1.
PDSCH parameters ^{Note 4}	Config 1, 2			SR.1.1 FDD	SR.1.1 FDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1, 2			CR.1.1 FDD	CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1, 2			CCR.1.1 FDD	CCR.1.1 FDD	
NR RF Channel Number				1	1	
EPRE ratio of PSS to SSS			dB	0	0	
EPRE ratio of PBCH_DMRS to SSS			dB			
EPRE ratio of PBCH to PBCH_DMRS			dB			
EPRE ratio of PDCCH_DMRS to SSS			dB			
EPRE ratio of PDCCH to PDCCH_DMRS			dB			
EPRE ratio of PDSCH_DMRS to SSS			dB			
EPRE ratio of PDSCH to PDSCH_DMRS			dB			
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	3	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1, 2	dBm/15kHz	-98	-98	
	$\hat{E}_s / N_{oc}$		dB	3	3	
	SS-RSRP ^{Note 3}		dBm/ SCS	-95	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	-17	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1, 2	dBm/15kHz	-98	-98	
	$\hat{E}_s / N_{oc}$		dB	-17	-17	
	SS-RSRP ^{Note 3}		dBm/ SCS	-115	-115	
I _o ^{Note 2}		Config 1, 2	dBm	-65.3/9.36MHz	-65.3/9.36MHz	For symbols without SSB index 1
ss-PBCH-BlockPower			dBm/ SCS	-5	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{CMAX, f, c}$)			dBm	23	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 2	FR1 PRACH configuration 3	As defined in A.3.8.2.
Propagation Condition			-	AWGN	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: SS-RSRP, Es/I_{ot} and I_o levels have been derived from other parameters for information purpose. They are not settable parameters. Note 3: Void Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.						

A.14.2.2.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.14.2.2.2.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2C.2.2.2.1 for SSB-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2C.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1C.2.

A.14.2.2.2.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-2, to test the UE behavior specified in Clause 6.2C.2.2.2.1 for CSI-RS-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2C.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1C.2.

A.14.2.2.2.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2C.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2C.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1C.2.

A.14.2.2.2.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2C.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2C.2.2. The power of the first preamble shall be 22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1C.2.

A.14.2.2.3 RRC Connection Release with Redirection

A.14.2.2.3.1 Redirection from NR in FR1 to NR in FR1

A.14.2.2.3.1.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to NR requirements specified in clause 6.2C.3.2.1.

A.14.2.2.3.1.2 Test Parameters

Supported test configurations are shown in table A.14.2.2.3.1.2-1. The time delay is tested by using the parameters in table A.14.2.2.3.1.2-2, and A.14.2.2.3.1.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2. Cell 1 and Cell 2 belong to different tracking areas.

Table A.14.2.2.3.1.2-1: Redirection from NR to NR test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.2.2.3.1.2-2: General test parameters for Redirection from NR to NR test case

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	

Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μ s	Synchronous cells
T1		s	5	
T2		s	2.3	

Table A.14.2.2.3.1.2-3: Cell specific test parameters for Redirection from NR to NR test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1, 2		FDD			
SSB Configuration	Config 1, 2		SSB.1 FR1			
CSI-RS for tracking	Config 1, 2		TRS.1.1 FDD			
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
BWP BW	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1, 2		SR.1.1 FDD			
CORESET Reference Channel	Config 1, 2		CR.1.1 FDD			
OCNG Patterns			OCNG pattern 1			
SMTc configuration	Config 1,2		SMTc.1 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}		dBm/15kHz	-98			
N_{oc}^{Note2}	Config 1,2	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s/I_{ot}$		dB	4	4	-infinity	4
$\hat{E}_s/N_{oc}$		dB	4	4	-infinity	4
I _o ^{Note3}	Config 1,2	dBm/9.36MHz	-64.59	-64.59	-70.05	-64.59
	Config 3	dBm/	-58.49	-58.49	-63.94	-58.49

		38.16MHz				
Propagation condition		-	AWGN			
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.14.2.2.3.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2240 ms from the beginning of time period T2.
The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{\text{connection_release_redirect_NR}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-NR}} + T_{\text{SI-NR}} + T_{\text{RACH}}$$

Where:

$T_{\text{RRC_procedure_delay}} = 110$ ms in the test.

$T_{\text{identify-NR}} = 680$ ms in the test.

$T_{\text{SI-NR}} = 1280$ ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

$T_{\text{RACH}} = 170$ ms in the test.

This gives a total of 2240 ms.

A.14.3 Timing for Satellite Access

A.14.3.1 UE transmit timing for Satellite Access

A.14.3.1.1 NR UE Transmit Timing Test for FR1

A.14.3.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the reference cell and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1C.2. Supported test configurations are shown in Table A.14.3.1.1.1-1.

Table A.14.3.1.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note:	If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.

The test consists a single NR cell (PCell). Table A.14.3.1.1.1-2 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.14.3.1.1.1-3.

Table A.14.3.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1,2	1	1
Serving satellite configuration		1	SSC.1	
		2	SSC.2	
BW _{channel}	MHz	1,2	10: N _{RB,c} = 52	
Initial BWP Configuration		1,2	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1,2	DLBWP.1.1 ULBWP.1.1	
DRX Cycle	ms	1,2	N/A	DRX.8 ^{Note5}
PDSCH Reference measurement channel		1,2	SR.1.1 FDD	
RMSI CORESET Reference Channel		1,2	CR.1.1 FDD	
Dedicated CORESET Reference Channel		1,2	CCR.1.1 FDD	
OCNG Patterns		1,2	OP.1	
SSB configuration		1,2	SSB.1 FR1	
SMTC Configuration		1,2	SMTC.1	
TRS configuration		1,2	TRS.1.1 FDD	
EPRE ratio of PSS to SSS	dB	1,2	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note2}	dBm/15 kHz	1,2	-98	-98
N_{oc} ^{Note2}	dBm/SCS	1,2	-98	-98
$\hat{E}_s / I_{ot}$		1,2	3	3
$\hat{E}_s / N_{oc}$		1,2	3	3
SS-RSRP ^{Note3}	dBm/SCS	1,2	-95	-95
I_o ^{Note3}	dBm/9.36MHz	1,2	-65.2	-65.2
Propagation condition		1,2	AWGN	
SRS Config		1,2	SRSCnf.1 ^{Note6}	SRSCnf.2 ^{Note6}
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5: DRX related parameters are given in Table A.3.3.8-1				
Note 6: SRS configs are given in Table A.14.3.1.1.1-3				

Table A.14.3.1.1.1-3: SRS Configuration for Timing Accuracy Test

	Field	SRSConf.1	SRSConf.2	Comments
SRS-ResourceSet	srS-ResourceSetId	0	0	
	srS-ResourceSetList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	
	cyclicShift-n2	0	0	
	resourceMapping startPosition	0	0	
	resourceMapping nrofSymbols	n1	n1	
	resourceMapping repetitionFactor	n1	n1	
	freqDomainPosition	0	0	
	freqDomainShift	0	0	
	freqHopping c-SRS	14	14	Matches $N_{RB,c}$
	freqHopping b-SRS	0	0	
	freqHopping b-hop	0	0	
	groupOrSequenceHopping	Neither	Neither	
	resourceType	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl320, 3	Offset to align with DRX periodicity
	sequenceId	0	0	Any 10 bit number

A.14.3.1.1.2 Test requirements

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test

- 1) Set up PCell according to parameters given in Table A.14.3.1.1.1-2.
- 2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset} + N_{TA,adj}^{common} + N_{TA,adj}^{UE}) \times T_c \pm (T_{e_NTN} - T_{GNSS_margin})$ of the first detected path of DL SSB.
 - a. The N_{TA_offset} value (in T_c units) is 25600
 - b. The $N_{TA,adj}^{common}$ value is derived from the higher-layer parameters $TACommon$, $TACommonDrift$, and $TACommonDriftVariation$.
 - c. The $N_{TA,adj}^{UE}$ value is computed by the UE based on UE position and serving-satellite-ephemeris-related higher-layers parameters.
 - d. The T_{e_NTN} values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1C.2-1

- e. The $T_{\text{GNSS_margin}}$ is the margin for the GNSS position definition error considered in the core requirement, which needs to be subtracted for the test requirement, due to the usage of AT commands in the test.
 $T_{\text{GNSS_margin}} = [327,68] \times T_c$
- 3) If the NTN parameters are configured as GSO scenario, the test system shall adjust the timing of the DL path by values given in Table A.14.3.1.1.2-1. If the NTN parameters are configured as NGSO scenario, the test system shall adjust the timing of the DL path according to the serving-satellite-ephemeris-related higher-layers parameters.

Table A.14.3.1.1.2-1: Adjustment Value for DL Timing

SCS of SSB signals (kHz)	Adjustment Value	
	Test1	Test2
15	$+64*64T_c$	$+32*64T_c$

- 4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in Clause 7.1C.2 Table 7.1C.2.1-1 until the UE transmit timing offset is within $(N_{\text{TA}} + N_{\text{TA-offset}} + N_{\text{TA,adj}}^{\text{common}} + N_{\text{TA,adj}}^{\text{UE}}) \times T_c \pm (T_{\text{e_NTN}} - T_{\text{GNSS_margin}})$ respective to the first detected path (in time) of DL SSB. Skip this step for test 2 with DRX configured.
- 5) The test system shall verify that the UE transmit timing offset stays within $(N_{\text{TA}} + N_{\text{TA-offset}} + N_{\text{TA,adj}}^{\text{common}} + N_{\text{TA,adj}}^{\text{UE}}) \times T_c \pm (T_{\text{e_NTN}} - T_{\text{GNSS_margin}})$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

A.14.3.2 Timing advance for satellite access

A.14.3.2.1 SA FR1 timing advance adjustment accuracy

A.14.3.2.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3C.

A.14.3.2.1.2 Test Parameters

Supported test configurations are shown in table A.14.3.2.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.14.3.2.1.2-2, A.14.3.2.1.2-3 and A.14.3.2.1.2-4.

In all test cases, single cell served by SAN is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.14.3.2.1.2-4, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

The UE shall be provided with the valid information about the SAN serving cell before the test. During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in Clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to Clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.14.3.2.1.2-2. This value shall result in

changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3C.2.1, the UE adjusts its uplink timing at slot $n+k+1+2^{\mu} \cdot K_{\text{offset}}$ for a timing advance command received in slot n . This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.14.3.2.1.2-1: Timing advance supported test configurations

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note:	If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.

Table A.14.3.2.1.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 15 kHz SCS $N_{TA_new} = N_{TA_old} + 8192 \cdot T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.14.3.2.1.2-3: Cell specific test parameters for timing advance

Parameter		Unit	Test1	
			T1	T2
Duplex mode	Config 1,2		FDD	
Satellite information	Config 1		SSC.1	
	Config 2		SSC.2	
BW _{channel}	Config 1,2	MHz	10: N _{RB,C} = 52	
BWP BW	Config 1,2	MHz	10: N _{RB,C} = 52	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,2		SR.1.1 FDD	
RMSI CORESET Reference Channel Dedicated CORESET Reference Channel	Config 1,2		CR.1.1 FDD	
	Config 1,2		CCR.1.1 FDD	
TRS configuration	Config 1,2		TRS.1.1 FDD	
OCNG Patterns			OCNG pattern 1	

SMTC configuration	Config 1,2		SMTC.1 FR1
SSB configuration	Config 1,2		SSB.1 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2	kHz	15 kHz
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} ^{Note2}		dBm/15kHz	-98
N_{oc} ^{Note2}	Config 1,2	dBm/SCS	-98
$\hat{E}_s / I_{ot}$		dB	3
$\hat{E}_s / N_{oc}$		dB	3
I_o ^{Note3}	Config 1,2	dBm/9.36MHz	-67.57
Propagation condition		-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.14.3.2.1.2-4: Sounding Reference Symbol Configuration for timing advance

Field	Value	Comment
c-SRS	Config 1,2	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=2 for SCS 15kHz	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.14.3.2.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. $k+1+2^{\mu} \cdot K_{\text{offset}}$ slots after the reception of the timing advance command, where $k=5$.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3C.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.14.4 Signalling characteristics

A.14.4.1 Radio link Monitoring

A.14.4.1.1 Radio Link Monitoring Out-of-sync Test for FR1 SAN PCell configured with SSB-based RLM RS in non-DRX mode

A.14.4.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the SAN PCell. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1C.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.14.4.1.1.1-1. The test parameters are given in Tables A.14.4.1.1.1-2, A.14.4.1.1.1-3, and A.14.4.1.1.1-4 below. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.14.4.1.1.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

Table A.14.4.1.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.1.1.1-2: General test parameters for FR1 out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
NTN reference configuration	Config 1		TBD
	Config 2		TBD
BW _{channel}	Config 1, 2	MHz	10: N _{RB,C} = 52
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1

UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.3 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
PRACH Configuration	Config 1, 2		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
CSI-RS for tracking	Config 1, 2		TRS.1.1 FDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.1.1.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB	0		
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB			
	Config 2		1	-7	-15
N_{oc}	Config 1	dBm/ 15kHz z	-98		
	Config 2		-98		
N_{oc}	Config 1	dBm/ SCS	-98		
	Config 2		-98		
Propagation condition			NTN-TDLC5-200		
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.				
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.				
Note 4:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.6.5.1C.1.1-1.				
Note 5:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.				

Table A.14.4.1.1.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note: Ensure that RLM RS is partially overlapped with measurement gap	

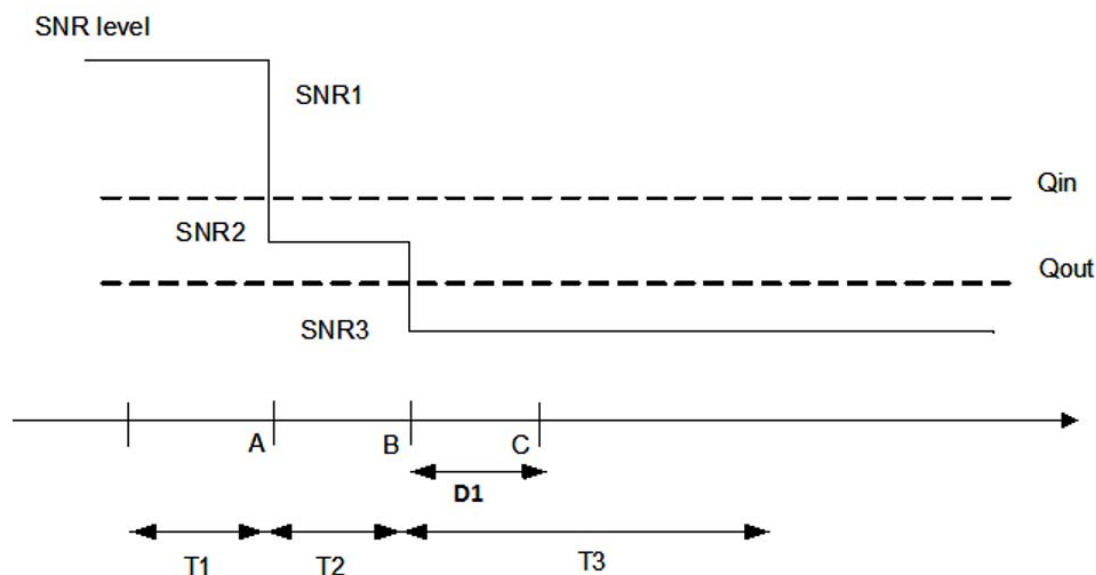


Figure A.14.4.1.1.1-1: SNR variation for out-of-sync testing

A.14.4.1.1.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.1.2 Radio Link Monitoring In-sync Test for FR1 SAN PCell configured with SSB-based RLM RS in non-DRX mode

A.14.4.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the SAN PCell. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1C.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.14.4.1.2.1-1. The test parameters are given in Tables A.14.4.1.2.1-2, and A.14.4.1.2.1-3 below. There is one cell (Cell 1), which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.1.2.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

Table A.14.4.1.2.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.1.2.1-2: General test parameters for FR1 in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
NTN reference configuration	Config 1		TBD
	Config 2		TBD
BW _{channel}	Config 1, 2	MHz	10: N _{RB,c} = 52
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.1 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTc Configuration	Config 1, 2		SMTc.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
PRACH Configuration	Config 1, 2		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6

Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
CSI-RS for tracking	Config 1, 2		TRS.1.1 FDD
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.1.2.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
N_{oc}	Config 1	dBm/15 kHz	-98				
	Config 2		-98				

N_{oc}	Config 1	dBm/ SCS	-98
	Config 2		-98
Propagation condition			NTN-TDLC5-200
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.		
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.		
Note 4:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.6.5.1C.2.1-1.		
Note 5:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.		

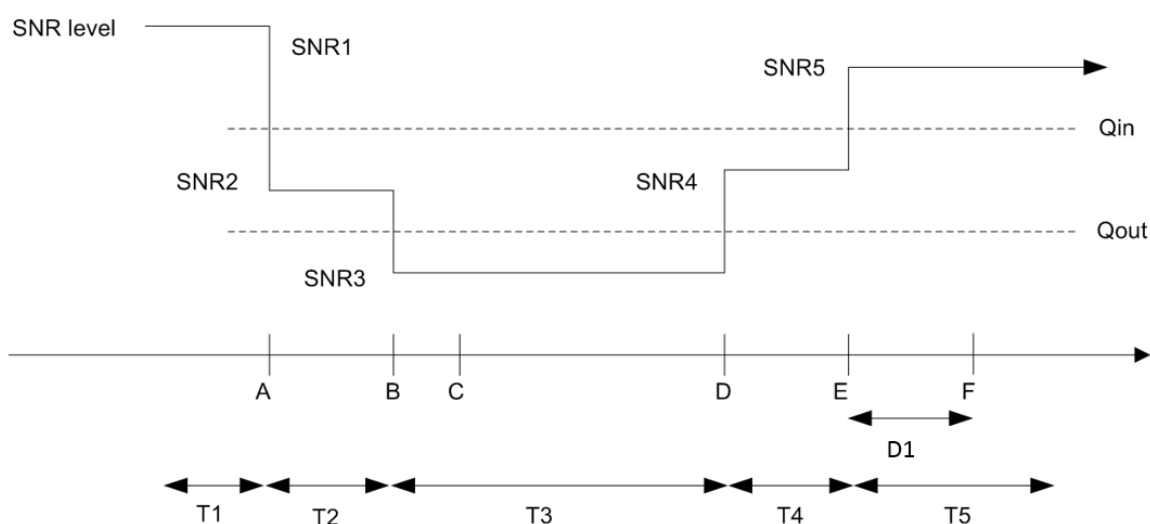


Figure A.14.4.1.2.1-1: SNR variation for in-sync testing

A.14.4.1.2.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.1.3 Radio Link Monitoring Out-of-sync Test for FR1 SAN PCell configured with SSB-based RLM RS in DRX mode

A.14.4.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the SAN PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1C.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to ‘*rlf*’. Supported test configurations are shown in table A.14.4.1.3.1-1. The test parameters are given in Tables A.14.4.1.3.1-2, and A.14.4.1.3.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.14.4.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

Table A.14.4.1.3.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.1.3.1-2: General test parameters for FR1 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
NTN reference configuration	Config 1		TBD
	Config 2		TBD
BW _{channel}	Config 1, 2	MHz	10: N _{RB,C} = 52
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.3 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
PRACH Configuration	Config 1, 2		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal

Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
CSI-RS for tracking	Config 1, 2		TRS.1.1 FDD
T1		s	0.2
T2		s	0.68
T3		s	0.68
D1		s	0.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.1.3.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1	dB	1	-7	-15
	Config 2		1	-7	-15

N_{oc}	Config 1	dBm/15 kHz	-98
	Config 2		-98
N_{oc}	Config 1	dBm/S CS	-98
	Config 2		-98
Propagation condition			NTN-TDLC5-200
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.			
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.			
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.6.5.1C.3.1-1.			
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is A.3.6.			

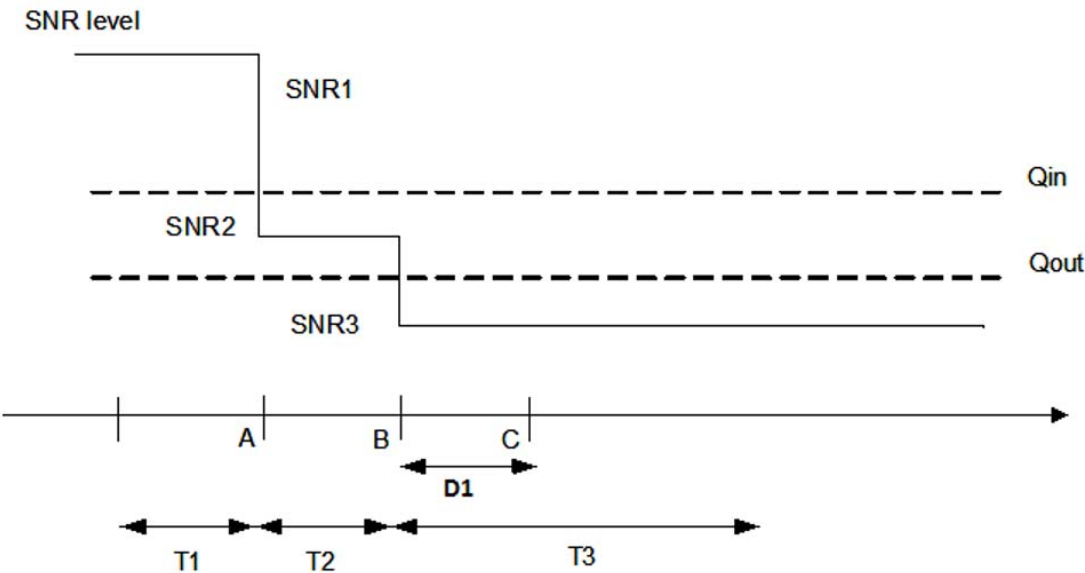


Figure A.14.4.1.3.1-1: SNR variation for out-of-sync testing

A.14.4.1.3.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.1.4 Radio Link Monitoring In-sync Test for FR1 SAN PCell configured with SSB-based RLM RS in DRX mode

A.14.4.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the SAN PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1C.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to ‘*rlf*’. Supported test configurations are shown in table A.14.4.1.4.1-1. The test parameters are given in Tables A.14.4.1.4.1-2, and A.14.4.1.4.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.1.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

Table A.14.4.1.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.1.4.1-2: General test parameters for FR1 in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
NTN reference configuration	Config 1		TBD
	Config 2		TBD
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD
SSB Configuration	Config 1		SSB.1 FR1
SMTTC Configuration	Config 1, 2		SMTTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
PRACH Configuration	Config 1, 2		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low

In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD
CSI-RS for tracking	Config 1		TRS.1.1 FDD
T1	s		0.2
T2	s		0.2
T3	s		0.64
T4	s		0.2
T5	s		0.88
D1	s		0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.1.4.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB	0				
EPRE ratio of PBCH DMRS to SSS	dB	0				
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					

EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
N_{oc}	Config 1	dBm/15 kHz	-98				
	Config 2		-98				
N_{oc}	Config 1	dBm/S CS	-98				
	Config 2		-98				
Propagation condition			NTN-TDLC5-200				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS RES. Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.6.5.1C.4.1-1. Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 and T4 is modified as specified in clause A.3.6.							

Table A.6.5.1C.4.1-4: Void

Table A.6.5.1C.4.1-5: Void

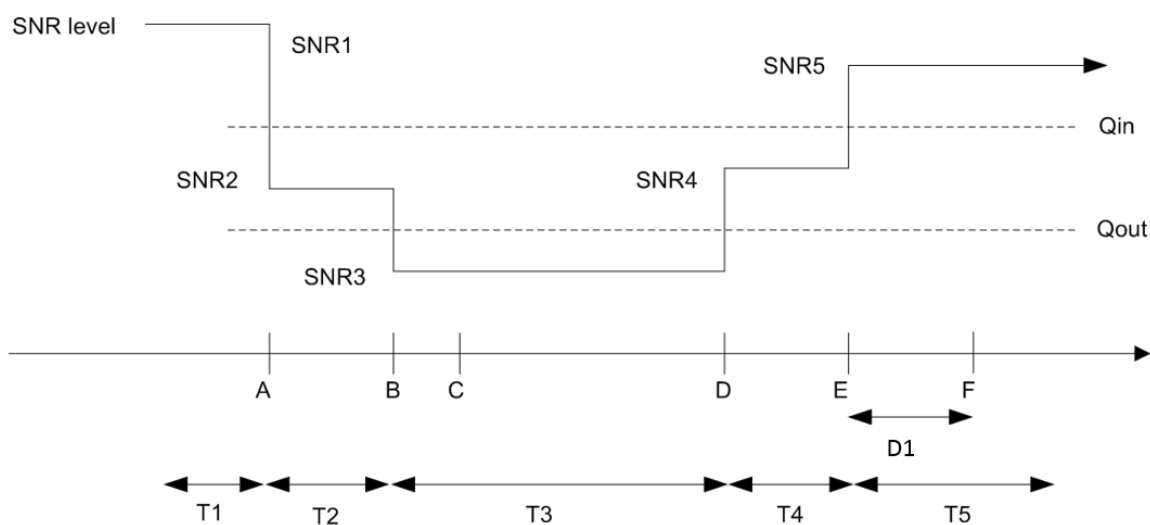


Figure A.14.4.1.4.1-1: SNR variation for in-sync testing.

A.14.4.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.1.5 Radio Link Monitoring Out-of-sync Test for FR1 SAN PCell configured with CSI-RS-based RLM in non-DRX mode

A.14.4.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the SAN PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1C.

The test parameters are given in Tables A.14.4.1.5.1-1, A.14.4.1.5.1-2, A.14.4.1.5.1-3, and A.14.4.1.5.1-3A below. There is one cell, cell 1 which is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.14.4.1.5.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting of 5ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS.

The UE shall be provided with the valid information about the SAN serving cells before the test.

Table A.14.4.1.5.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	GSO, FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	NGSO, FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Table A.14.4.1.5.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Satellite information	Config 1		SSC.1
	Config 2		SSC.2
Duplex mode	Config 1, 2		FDD
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.3 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz

TRS configuration	Config 1, 2		TRS.1.1 FDD
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.1.1 FDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.1.5.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS PDCCH_DMRS_beta	dB			
EPRE ratio of PBCH DMRS to SSSPBCH_beta	dB	0		
EPRE ratio of PBCH to PBCH DMRS PSS_beta	dB			
EPRE ratio of PSS to SSSSS_beta	dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta	dB			
EPRE ratio of PDSCH to PDSCH DMRS	dB			
EPRE ratio of OCNG DMRS to SSS	dB			
EPRE ratio of OCNG to OCNG DMRS	dB			

SNR on RLM-RS	Config 1, 2	dB	1	-7	-15
N_{oc}	Config 1, 2	dBm/15kHz	-98		
Propagation condition			NTN-TDLC5-200		
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.				
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.				
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.				
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.				
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.				
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.				
Note 8:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.14.4.1.5.1-1.				
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is [A.3.6].				

Table A.14.4.1.5.1-3A: Measurement gap configuration for FR1 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: Void	

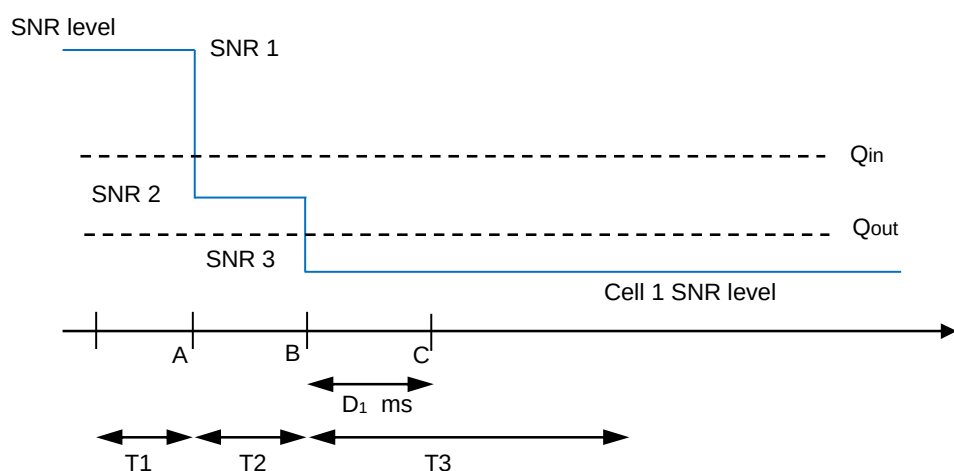


Figure A.14.4.1.5.1-1: SNR variation for CSI-RS out-of-sync testing

A.14.4.1.5.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.1.6 Radio Link Monitoring In-sync Test for FR1 SAN PCell configured with CSI-RS-based RLM in non-DRX mode

A.14.4.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the SAN PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1C.

The test parameters are given in Tables A.14.4.1.6.1-1, A.14.4.1.6.1-2, and A.14.4.1.6.1-3 below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.1.6.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. In the test, SSB0 is configured as the BFD-RS.

The UE shall be provided with the valid information about the SAN serving cells before the test.

Table A.14.4.1.6.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	GSO, FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	NGSO, FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Table A.14.4.1.6.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Satellite information	Config 1		SSC.1
	Config 2		SSC.2
Duplex mode	Config 1, 2		FDD
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.1 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
TRS configuration	Config 1, 2		TRS.1.1 FDD
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.1.1 FDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2

OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
T1		s	0.2
T2		s	0.2
T3		s	0.44
T4		s	0.2
T5		s	0.88
T6		s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.1.6.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta	dB	4				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta	dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta	dB	0				

EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB					
EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 2	dB	1	-7	-15	-4.5	1
N _{oc}	Config 1, 2	dBm/15kHz	-98				
Propagation condition			NTN-TDLC5-200				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.14.4.1.6.1-1.						
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.						

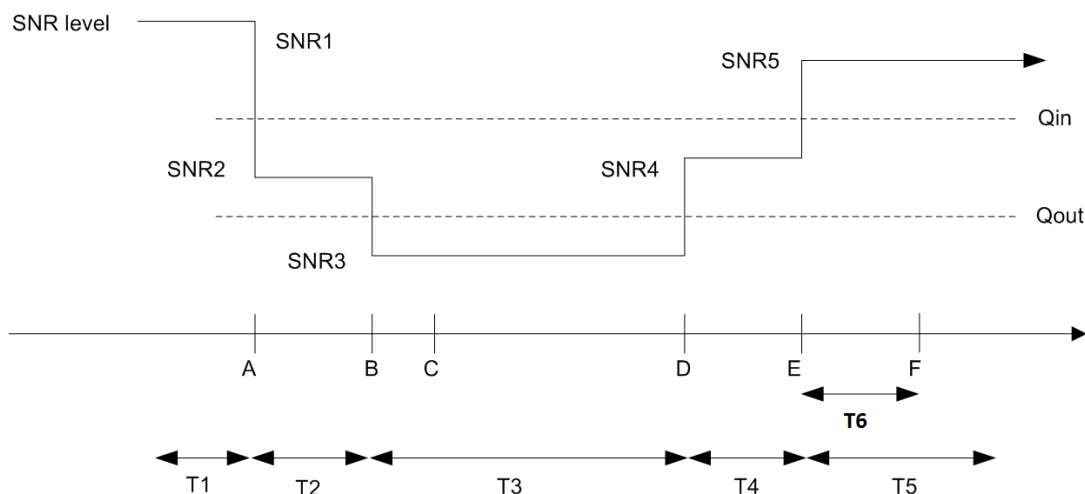


Figure A.14.4.1.6.1-1: SNR variation for CSI-RS in-sync testing

A.14.4.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.1.7 Radio Link Monitoring Out-of-sync Test for FR1 SAN PCell configured with CSI-RS-based RLM in DRX mode

A.14.4.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the SAN PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1C.

The test parameters are given in Tables A.14.4.1.7.1-1, A.14.4.1.7.1-2, and A.6.5.1.7C.1-3 below. There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.14.4.1.7.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 is configured as the BFD-RS.

The UE shall be provided with the valid information about the SAN serving cells before the test.

Table A.14.4.1.7.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	GSO, FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	NGSO, FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Table A.14.4.1.7.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Satellite information	Config 1		SSC.1
	Config 2		SSC.2
Duplex mode	Config 1, 2		FDD
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.3 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
TRS configuration	Config 1, 2		TRS.1.1 FDD

CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.1.1 FDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.1.7.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS PDCCH_DMRS_beta		dB	4		
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB	0		
EPRE ratio of PBCH to PBCH DMRS PSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 2	dB	1	-7	-15

N_{oc}	Config 1, 2	dBm/15kHz	-98
Propagation condition		NTN-TDLC5-200	
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.		
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.		
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.		
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.		
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.		
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.		
Note 8:	The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.14.4.1.7.1-1.		
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.		

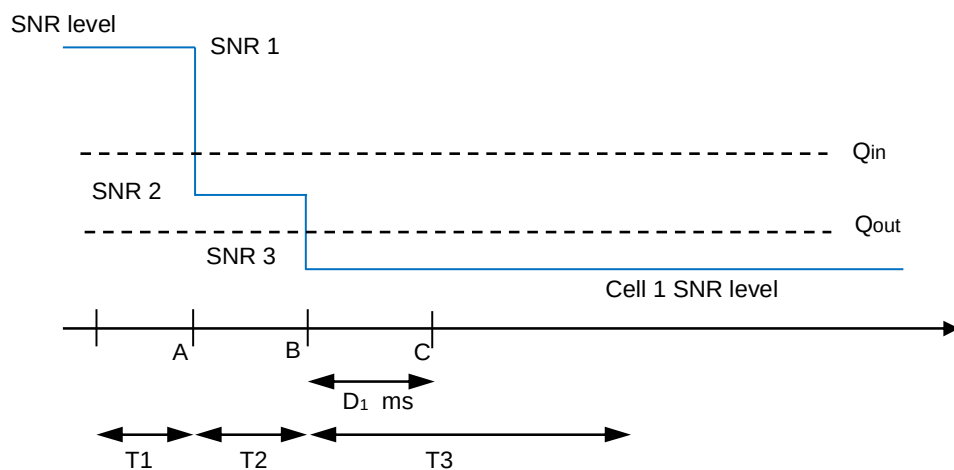


Figure A.14.4.1.7.1-1: SNR variation for CSI-RS out-of-sync testing

A.14.4.1.7.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.1.8 Radio Link Monitoring In-sync Test for FR1 SAN PCell configured with CSI-RS-based RLM in DRX mode

A.14.4.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the SAN PCell when DRX is used. This test will partly verify the FR1 Pcell CSI-RS In-sync radio link monitoring requirements in clause 8.1C.

The test parameters are given in Tables A.14.4.1.8.1-1, A.14.4.1.8.1-2, A.14.4.1.8.1-3 and A.14.4.1.8.1-3A below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.1.8.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS.

The UE shall be provided with the valid information about the SAN serving cells before the test.

Table A.14.4.1.8.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	GSO, FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	NGSO, FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Table A.14.4.1.8.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Satellite information	Config 1		SSC.1
	Config 2		SSC.2
Duplex mode	Config 1, 2		FDD
DL initial BWP configuration	Config 1, 2		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1
UL initial BWP configuration	Config 1, 2		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.1 FDD
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz
TRS configuration	Config 1, 2		TRS.1.1 FDD
CSI-RS for RLM	Config 1, 2		Resource #4 in TRS.1.1 FDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8

In sync transmission parameters	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 2		CSI-RS.1.1 FDD
T1		s	0.2
T2		s	0.2
T3		s	1.24
T4		s	0.2
T5		s	1.88
T6		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.1.8.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta	dB	4				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta	dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta	dB	0				
EPRE ratio of PBCH to PBCH DMRSPSS_beta	dB					
EPRE ratio of PSS to SSSSSS_beta	dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					

EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 2	dB	1	-7	-15	-4.5	1
N_{oc}	Config 1, 2	dBm/15kHz	-98				
Propagation condition			NTN-TDLC5-200				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Measurement gap configuration is assigned to the UE prior to the start of time period T1.						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS RES.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.14.4.1.8.1-1.						
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is specified in clause A.3.6.1.1.						

Table A.6.5.1.8.1-3A: Measurement gap configuration for FR1 CSI-RS in-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: Void	

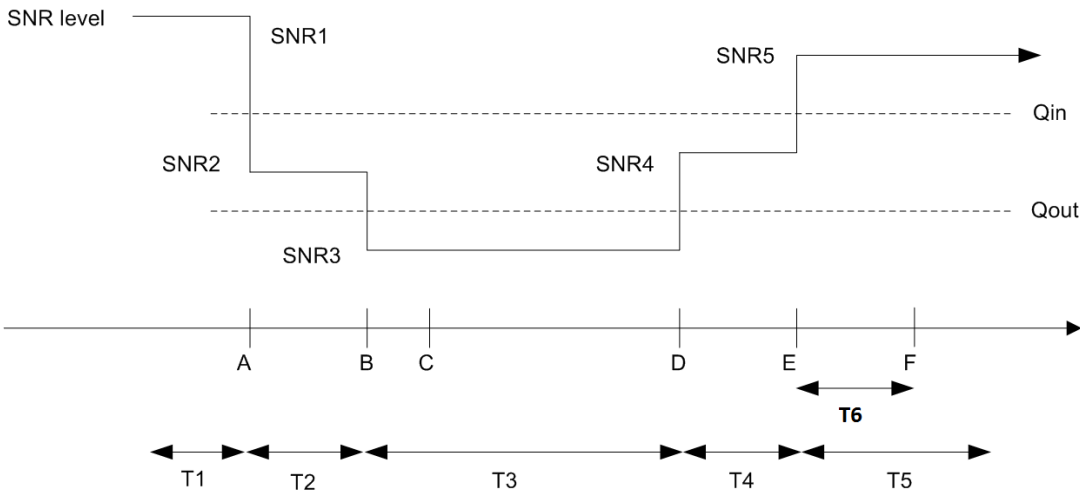


Figure A.14.4.1.8.1-1: SNR variation for CSI-RS in-sync testing

A.14.4.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.2 Beam Failure Detection and Link recovery procedures for satellite access

A.14.4.2.1 Beam Failure Detection and Link Recovery Test for FR1 PCell for satellite access configured with SSB-based BFD and LR in non-DRX mode

A.14.4.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell which is served by satellite access node (SAN) and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.14.4.2.1.1-1, A.14.4.2.1.1-2, A.14.4.2.1.1-3 and A.14.4.2.1.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.2.1.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.14.4.2.1.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.14.4.2.1.1-1: Supported test configurations for FR1 Pcell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.2.1.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value Test 1	Comment
NTN reference Serving satellite configuration	Config 1		SSC.1	
	Config 2		SSC.2	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1,2		FDD	
BWchannel	Config 1,2	MHz	10: NRB,c = 52	
DL initial BWP configuration	Config 1,2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1	
UL initial BWP configuration	Config 1,2		ULBWP.0.1	

UL dedicated BWP configuration	Config 1,2		ULBWP.1.1	
TDD Configuration	Config 1,2		Not Applicable	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 FDD	
SSB Configuration	Config 1,2		SSB.3 FR1	
SMTC Configuration	Config 1,2		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2		15 KHz	
PRACH Configuration	Config 1,2		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			gp0	
gapOffset			0	
rimInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$

powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.1.1 FDD	
CSI-RS for tracking	Config 1,2		TRS.1.1 FDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.37	
T3		s	0.24	
T4		s	0	
T5		s	0.17	
D1		s	0.13	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.14.4.2.1.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1,2	dB	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1,2	dB	-10	-10	10	10	10
SSB_RP of set q_1	Config 1,2	dBm/S CS kHz	-108	-108	-88	-88	-88
N_{oc}	Config 1,2	dBm/15 KHz	-98				
Propagation condition			NTN-TDLC5-200				

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
- Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.1.1-1.
- Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

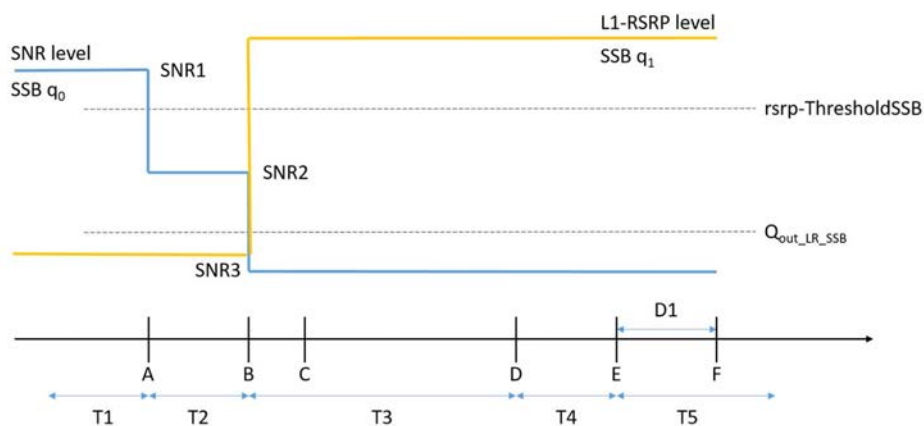


Figure A.14.4.2.1.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.14.4.2.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 120 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.2.2 Beam Failure Detection and Link Recovery Test for FR1 PCell for satellite access configured with SSB-based BFD and LR in DRX mode

A.14.4.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell which is served by satellite access node (SAN) and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.14.4.2.2.1-1, A.14.4.2.2.1-2, A.14.4.2.2.1-3, A.14.4.2.2.1-4 and A.14.4.2.2.1-5 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.2.2.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.14.4.2.2.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.14.4.2.2.1-1: Supported test configurations for FR1 Pcell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.2.2.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
NTN reference Serving satellite configuration	Config 1		SSC.1	
	Config 2		SSC.2	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1,2		FDD	
BWchannel	Config 1,2	MHz	10: NRB,c = 52	
DL initial BWP configuration	Config 1,2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1,2		DLBWP.1.1	
UL initial BWP configuration	Config 1,2		ULBWP.0.1	
UL dedicated BWP configuration	Config 1,2		ULBWP.1.1	
TDD Configuration	Config 1,2		Not Applicable	

RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 FDD	
SSB Configuration	Config 1,2		SSB.3 FR1	
SMTC Configuration	Config 1,2		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1,2		15 KHz	
PRACH Configuration	Config 1,2		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
rlmInSyncOutOfSyncThreshold			Absent	When the field is absent, the UE applies the value 0.

				(Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1,2	dBm/SCS kHz	-98	Threshold used for $Q_{in LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.1.1 FDD	
CSI-RS for tracking	Config 1,2		TRS.1.1 FDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	5.17	
T3		s	3.24	
T4		s	0	
T5		s	1.97	
D1		s	1.93	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.14.4.2.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					

SNR_SSB of set q_0	Config 1,2	dB	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1,2	dB	-10	-10	10	10	10
SSB_RP of set q_1	Config 1,2	dBm/S CS kHz	-108	-108	-88	-88	-88
N_{oc}	Config 1,2	dBm/15 KHz	-98				
Propagation condition			NTN-TDLC5-200				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Void						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio over the SSS REs.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.						
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.						

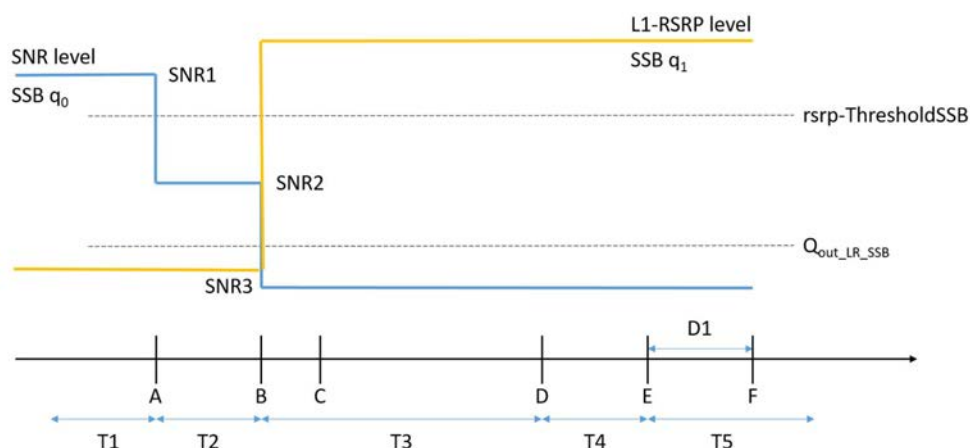


Figure A.14.4.2.2.1-1: SNR and L1-RSRP variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.14.4.2.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 1920 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.2.3 Beam Failure Detection and Link Recovery Test for FR1 PCell for satellite access configured with CSI-RS-based BFD and LR in non-DRX mode

A.14.4.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell which is served by satellite access node (SAN) and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.14.4.2.3.1-1, A.14.4.2.3.1-2, and below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.2.3.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.14.4.2.3.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.14.4.2.3.1-1: Supported test configurations for FR1 Pcell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.2.3.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value Test 1	Comment
NTN reference Serving satellite configuration	Config 1		SSC.1	
	Config 2		SSC.2	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1,2		FDD	
TDD Configuration	Config 1,2		Not Applicable	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	A.3.1.2
Dedicated CORESET Reference Channel SSB Configuration	Config 1,2		CCR.1.1 FDD	A.3.1.3
	Config 1,2		SSB.3 FR1	A.3.10

SSB Configuration	Config 1,2		SSB. 3 FR1	A.3.10
SMTc Configuration	Config 1,2		SMTc.1	A.3.11
PDSCH/PDCCH subcarrier spacing	Config 1,2		15 KHz	
PRACH Configuration	Config 1,2		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	N
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1,2	dBm/SC S kHz	-98	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 and q_1	Config 1,2		CSI-RS.1.2 FDD	A.3.14
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.1.1 FDD	A.3.14
TRS configuration	Config 1,2		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS	Config 1,2		CSI-RS.1.2 FDD	A.3.14
T310 Timer		ms	1000	

N310		2	
T1	s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2	s	0.18	
T3	s	0.14	
T4	s	0	
T5	s	0.08	
D1	s	0.04	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.14.4.2.3.1-3 Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1,2	dB	5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1,2	dB	-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1,2	dBm/S CS kHz	-108	-108	-88	-88	-88
N_{oc}	Config 1,2	dBm/15 KHz	-98				
Propagation condition			NTN-TDLC5-200				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Void							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.							
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.							

DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.14.4.2.4.1-1: Supported test configurations for FR1 Pcell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.2.4.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
NTN reference Serving satellite configuration	Config 1		SSC.1	
	Config 2		SSC.2	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1,2		FDD	
TDD Configuration	Config 1,2		Not Applicable	
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	A.3.1.2
Dedicated CORESET Reference Channel	Config 1,2		CCR.1.1 FDD	A.3.1.3
SSB Configuration	Config 1,2		SSB. 3 FR1	A.3.10
SMTC Configuration	Config 1,2		SMTC.1	A.3.11
PDSCH/PDCCH subcarrier spacing PRACH Configuration	Config 1,2		15 KHz	
	Config 1,2		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS	dB	0	

	energy to average CSI-RS RE energy			
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1,2	dBm/SC S kHz	-98	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 and q_1	Config 1,2		CSI-RS.1.2 FDD	A.3.14.1
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.1.1 FDD	A.3.14.1
TRS configuration	Config 1,2		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS	Config 1,2		CSI-RS.1.2 FDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.14.4.2.4.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					

SNR_CSI-RS of set q_0	Config 1	dB	5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1	dB/SC S kHz	-108	-108	-88	-88	-88
N_{oc}	Config 1	dBm/15 kHz	-98				
Propagation condition			NTN-TDLC5-200				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. Note 4: Void Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS. Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1. Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.							

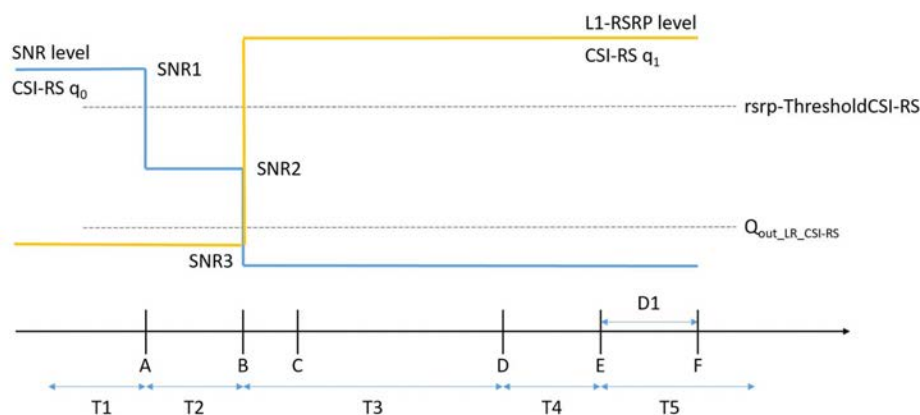


Figure A.14.4.2.4.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.14.4.2.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 1920 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.2.5 Beam Failure Detection and Link Recovery Test for FR1 SCell for satellite access configured with CSI-RS-based BFD and SSB-based LR in non-DRX mode

A.14.4.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell which is served by satellite access node (SAN) and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP without *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.14.4.2.5.1-1, A.14.4.2.5.1-2, and below. There are two cells, cell 1 is the PCell and cell 2 is the SCell, in the test. UE is not provided by *schedulingRequestID-BFR-SCell-r16*, i.e., no configuration for PUCCH transmission resources, and UE shall perform the random access procedure to recover the beam failure. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.2.5.1-1 shows the SNR of the CSI-RS in set q_0 in the active SCell to emulate beam failure. Figure A.14.4.2.5.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.14.4.2.5.1-1: Supported test configurations for FR1 PCell and SCell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.2.5.1-2: General test parameters for FR1 SCell for beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
NTN reference Serving satellite configuration	Config 1		SSC.1	
	Config 2		SSC.2	
Active PCell			Cell 1	
RF Channel Number for PCell			1	
Active SCell			Cell 2	
RF Channel Number for SCell			2	
Duplex mode	Config 1,2		FDD	

BW channel	Config 1,2		10: NRB,c = 52	
TDD Configuration	Config 1,2		Not Applicable	
CORESET Reference Channel	Config 1,2		CR.1.1 FDD	A.3.1.2
SSB Configuration	Config 1,2		SSB.1 FR1	A.3.10
SMTC Configuration	Config 1,2		SMTC.1	A.3.11
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15	
PRACH Configuration	Config 1,2		Table A.3.8.2.2-1	
csi-RS-Index assigned as beam failure detection RS in set q_0 in activated SCell			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
schedulingRequestID-BFR-SCell-r16			absent	When the field is absent, the random access procedure will be triggered for SCell BFR
SSB Index assigned as CBD RS (q_1) in activated SCell			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).

rsrp-ThresholdBFR	Config 1,2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 in activated SCell	Config 1,2		CSI-RS.1.2 FDD	A.3.14
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.1.1 FDD	A.3.14
TRS configuration	Config 1,2		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS in PCell	Config 1,2		CSI-RS.1.2 FDD	A.3.14
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	
T5		s	0.17	
D1		s	0.13	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.14.4.2.5.1-3: Cell specific test parameters for FR1 SCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Cell1 T1 to T5	Test 1 Cell2				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB						
EPRE ratio of PBCH DMRS to SSS	dB						
EPRE ratio of PBCH to PBCH DMRS	dB						
EPRE ratio of PSS to SSS	dB						
EPRE ratio of PDSCH DMRS to SSS	dB						
EPRE ratio of PDSCH to PDSCH DMRS	dB						
EPRE ratio of OCNG DMRS to SSS	dB						
EPRE ratio of OCNG to OCNG DMRS	dB						

SNR_CSI-RS of set q_0	Config 1,2	dB	5	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1,2	dB	-10	-10	-10	10	10	10
SSB_RP of set q_1	Config 1,2	dBm/	-108	-108	-108	-88	-88	-88
N_{oc}	Config 1,2	dBm/15 KHz	-98	-98				
Propagation condition			NTN-TDLC5-200	NTN-TDLC5-200				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4:	Void							
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.							
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.							
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.							

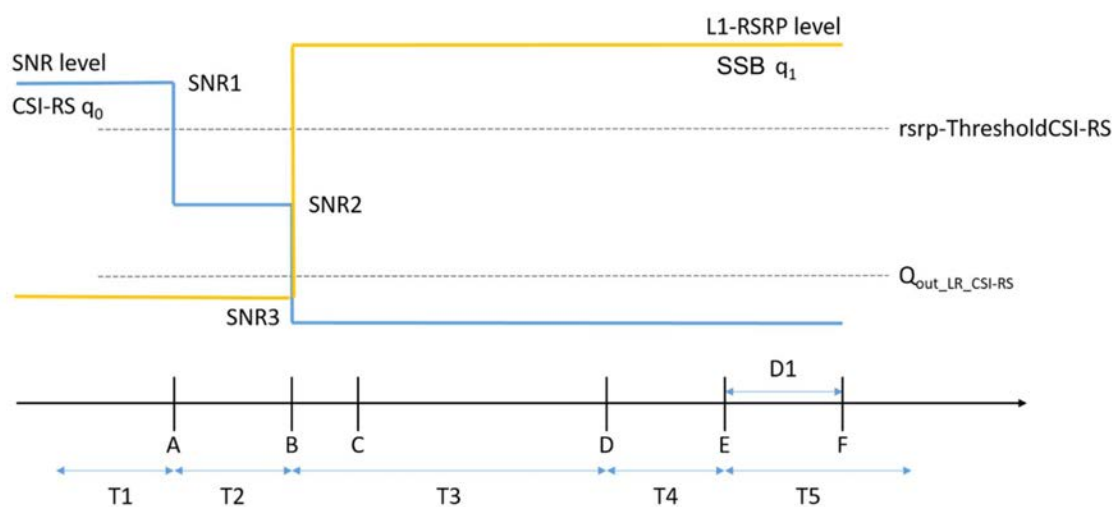


Figure A.14.4.2.5.1-1: SNR and L1-RSRP variation for beam failure detection and link recovery testing in for SCell non-DRX mode

A.14.4.2.5.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiat link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 120+10$ ms after the start of T5, the UE shall transmit preamble for UL-SCH resource application, followed by MAC-CE on the assigned uplink resources containing a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble earlier than time point B.

During T5, the System Simulator shall transmit a Random Access Response to UE after the System Simulator receives the preamble from UE. The UE shall transmit the msg.3 containing candidate beam set q_1 for SCell BFR if UE receives the Random Access Response.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.2.6 Beam Failure Detection and Link Recovery Test for FR1 SCell for satellite access configured with CSI-RS-based BFD and SSB-based LR in DRX mode

A.14.4.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell which is served by satellite access node (SAN) and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP without *schedulingRequestID-BFR-SCell-r16* configuration, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.14.4.2.6.1-1, A.14.4.2.6.1-2, A.14.4.2.6.1-3, and A.14.4.2.6.1-4 below. There are two cells, cell 1 is the PCell and cell 2 is the SCell, in the test. UE is not provided by *schedulingRequestID-BFR-SCell-r16*, i.e., no configuration for PUCCH transmission resources, and UE shall perform the random access procedure to recover the beam failure. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.14.4.2.6.1-1 shows the SNR of the CSI-RS in set q_0 in the active SCell to emulate beam failure. Figure A.14.4.2.6.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1 and cell 2. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in SCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.14.4.2.6.1-1: Supported test configurations for FR1 PCell and SCell

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.2.6.1-2: General test parameters for FR1 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Value	Comment
		Test 1	
	Config 1	SSC.1	

NTN reference Serving satellite configuration	Config 2		SSC.2	
Active PCell			Cell 1	
RF Channel Number for PCell			1	
Active SCell			Cell 2	
RF Channel Number for SCell			2	
Duplex mode	Config 1,2		FDD	
BW channel	Config 1,2	MHz	10: NRB,c = 52	
TDD Configuration	Config 1,2		Not Applicable	
CORESET Reference Channel	Config 1,2		CR.1.1 FDD	A.3.1.2
SSB Configuration	Config 1,2		SSB.1 FR1	A.3.10
SMTC Configuration	Config 1,2		SMTC.1	A.3.11
PDSCH/PDCCH subcarrier spacing	Config 1,2		15 KHz	
PRACH Configuration	Config 1,2		Table A.3.8.2.1-1	
csi-RS-Index assigned as beam failure detection RS in set q_0 in activated SCell			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
schedulingRequestID-BFR-SCell-r16			absent	When the field is absent, the random access procedure will be triggered for SCell BFR
SSB Index assigned as CBD RS (q_1) in activated SCell			0	

rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdBFR	Config 1,2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for qin activated SCell	Config 1,2		CSI-RS.1.2 FDD	A.3.14.1
CSI-RS configuration for CSI reporting	Config 1,2		CSI-RS.1.1 FDD	A.3.14.1
TRS configuration	Config 1,2		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS in PCell	Config 1,2		CSI-RS.1.2 FDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.93	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.14.4.2.6.1-3: Cell specific test parameters for FR1 SCell for beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Cell 1 T1 to T5	Test 1 Cell2				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB						
EPRE ratio of PBCH DMRS to SSS	dB						
EPRE ratio of PBCH to PBCH DMRS	dB						
EPRE ratio of PSS to SSS	dB						
EPRE ratio of PDSCH DMRS to SSS	dB						
EPRE ratio of PDSCH to PDSCH DMRS	dB						

EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR_CSI-RS of set q_0	Config 1,2	dB	5	5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1,2	dB	-10	-10	-10	10	10	10
SSB_RP of set q_1	Config 1,2	dBm/SCS kHz	-110	-108	-108	-88	-88	-88
N_{oc}	Config 1,2	dBm/15 kHz	-98	-98				
Propagation condition			NTN-TDLC5-200	NTN-TDLC5-200				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1. Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1. Note 4: Void Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1. Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS. Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1. Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.								

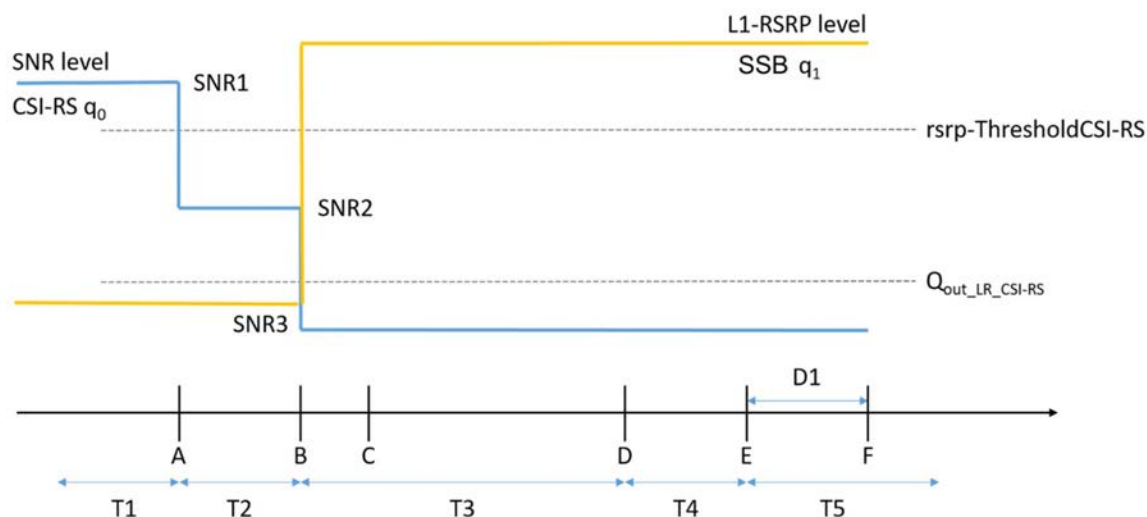


Figure A.14.4.2.6.1-1: SNR and L1-RSRP variation for beam failure detection and link recovery testing for SCell in DRX mode

A.14.4.2.6.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 120 + 10$ ms after the start of T5, the UE shall transmit preamble for UL-SCH resource application, followed by MAC-CE on the assigned uplink resources containing a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble earlier than time point B.

During T5, the System Simulator shall transmit a Random Access Response to UE after the System Simulator receives the preamble from UE. The UE shall transmit the msg.3 containing candidate beam set q_1 for SCell BFR if UE receives the Random Access Response.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.3 Active BWP switch for satellite access

A.14.4.3.1 DCI-based and Timer-based Active BWP Switch

A.14.4.3.1.1 NR FR1 DL active BWP switch with non-DRX in SA

A.14.4.3.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6C.

The supported test configurations are shown in Table A.14.4.3.1.1.1-1. The test scenario comprises of one cell (Cell 1) as given in Table A.14.4.3.1.1.1-2. Cell-specific parameters of the cell are specified in Table A.14.4.3.1.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test. BWP-1 and BWP-2 always include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
- UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

The cell has constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell1's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6C and starts to report valid ACK/NACK for the Cell1 no later than the first UL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay} + k1 + 2^{\mu - \mu_{Koffset}} K_{offset}$). The

UE shall be continuously scheduled on Cell1's BWP-2 starting from the first DL slot that occurs after the beginning of slot $(i + T_{BWPswitchDelay})$.

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell1.

During T3,

The time period T3 starts from the slot #j, where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's slot $(j + T_{BWPswitchDelay})$ as defined in clause 8.6C and starts to report valid ACK/NACK for the Cell1 at latest on the first UL slot that occurs after the beginning of slot $(j + T_{BWPswitchDelay} + k1 + 2^{\mu-K_{offset}} K_{offset})$. The UE shall be continuously scheduled on Cell1's BWP-1 starting from the first DL slot that occurs after the beginning of slot $(j + T_{BWPswitchDelay})$.

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

Table A.14.4.3.1.1.1-1: DL BWP switch supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.3.1.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell1 on RF channel number 1.
CP length		Normal	
DRX		OFF	
<i>bwp-InactivityTimer</i>	ms	200	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.14.4.3.1.1.1-3 : NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1, 2		FDD
BW _{channel}	Config 1, 2		10 MHz: N _{RB,C} = 52
Serving Satellite Configuration	Config 1, 2		[SSC.1] or [SSC.2] [Note: SSC.1 and SSC.2 are Serving Satellite Configurations for GSO and NGSO, respectively. The selection between the two is up to UE capability, and SSC.2 is selected if DUT supports both]
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1, 2		DLBWP.0.2 ^{Note 4}

Active DL BWP-1 Configuration	Config 1, 2		DLBWP.1.1 ^{Note 4}
Active DL BWP-2 Configuration	Config 1, 2		DLBWP.1.3 ^{Note 4}
Initial UL BWP Configuration	Config 1, 2		ULBWP.0.2 ^{Note 4}
Active UL BWP-1 Configuration	Config 1, 2		ULBWP.1.1 ^{Note 4}
Active UL BWP-2 Configuration	Config 1, 2		N/A
PDSCH Reference measurement channel	Config 1, 2		SR.1.1 FDD
RMSI CORESET parameters	Config 1, 2		CR.1.1 FDD
Dedicated CORESET parameters	Config 1, 2		CCR.1.2 FDD
OCNG Patterns			OP.1
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration	Config 1, 2		SMTC.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1, 2		TRS.1.1 FDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N _{oc} ^{Note 2}	Config 1, 2	dBm/SCS	-104
N _{oc} ^{Note 2}		dBm/15kHz	-104
		z	
SS-RSRP ^{Note 3}	Config 1, 2	dBm/SCS	-87
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I ₀ ^{Note3}	Config 1, 2	dBm/9.36MHz	-58.96
Propagation Condition			AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 3: SS-RSRP and I ₀ levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.14.4.3.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1 + 2^{\mu - \mu_{K_{offset}}} K_{offset})$.

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(j + T_{BWPswitchDelay} + k1 + 2^{\mu - \mu_{K_{offset}}} K_{offset})$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6C.2-1.

All of the above test requirements shall be fulfilled in order for the observed Cell1 active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.3.2 RRC-based Active BWP Switch

A.14.4.3.2.1 NR FR1 DL active BWP switch of Cell with non-DRX in SA

A.14.4.3.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6C.

The supported test configurations are shown in Table A.14.4.3.2.1.1-1. The test scenario comprises of one Cell (Cell 1) as given in Table A.14.4.3.2.1.1-2. Cell-specific parameters of Cell are specified in Table A.14.4.3.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted i . The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length})$ as defined in clause 8.6C.3 and starts to report valid

ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length} + k1 + 2^{\mu - \mu K_{offset}} K_{offset})$ on BWP-1 of final condition. The UE shall be continuously scheduled on PCell's BWP-1 of final condition starting from the first DL slot right after slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length})$.

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6C.3.

The test equipment verifies the DL BWP switch time in Cell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when a valid ACK/NACK is received.

Table A.14.4.3.2.1.1-1: DL BWP switch supported test configurations in SA scenario

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.3.2.1.1-2: General test parameters for DL BWP switch in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

Table A.14.4.3.2.1.1-3: NR Cell specific test parameters for DL BWP switch in SA scenario

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode		Config 1, 2	FDD
BW _{channel}		Config 1, 2	10 MHz: N _{RB,C} = 52
Serving Satellite Configuration		Config 1, 2	[SSC.1] or [SSC.2] [Note: SSC.1 and SSC.2 are Serving Satellite Configurations for GSO and NGSO, respectively. The selection between the two is up to UE capability, and SSC.2 is selected if DUT supports both]
Active BWP ID			1
Initial DL BWP Configuration		Config 1, 2	DLBWP.0.2
Initial UL BWP Configuration		Config 1, 2	ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1, 2	DLBWP.1.3
	Active UL BWP-1 Configuration	Config 1, 2	ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration	Config 1, 2	DLBWP.1.1
	Active UL BWP-1 Configuration	Config 1, 2	ULBWP.1.1
PDSCH Reference measurement channel		Config 1, 2	SR.1.1 FDD
RMSI CORESET parameters		Config 1, 2	CR.1.1 FDD
Dedicated CORESET parameters		Config 1, 2	CCR.1.2 FDD

OCNG Patterns			OP.1
SSB Configuration	Config 1, 2		SSB.1 FR1
SMTC Configuration			SMTC.1
TRS Configuration	Config 1, 2		TRS.1.1 FDD
Antenna Configuration			1x2 Low
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^(Note 1)			
EPRE ratio of OCNG to OCNG DMRS ^(Note 1)			
N _{oc} ^{Note 2}	Config 1, 2	dBm/SCS	-104
SS-RSRP ^{Note 3}	Config 1, 2	dBm/SCS	-87
$\tilde{E}_s/I_{ot}$		dB	17
$\tilde{E}_s/N_{oc}$		dB	17
I _o ^{Note3}	Config 1, 2	dBm/ 9.36MHz	-58.96
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.14.4.3.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the Cell from the first DL slot that occurs right after the beginning of slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length})$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length} + k1 + 2^{\mu - \mu_{K_{offset}}} K_{offset})$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed Cell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.4 UE specific CBW change for satellite access

A.14.4.4.1 UE specific CBW change on PCell in FR1 in non-DRX

A.14.4.4.1.1 Test Purpose and Environment

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13C.

The supported test configurations are shown in Table A.14.4.4.1.1-1. The test scenario comprises of one Cell (Cell 1), which is PCell as given in Table A.14.4.4.1.1-2. Cell-specific parameters are specified in Table A.14.4.4.1.1-3.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE sends ACK/NACK during the test.

Before the test starts:

UE is connected to Cell 1 (PCell) on radio channel 1.

UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PCell).

UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in PCell.

UE has been configured with UE specific CBW (CBW-1).

UE is indicated in *SCS-SpecificCarrier* [2] that the UE specific CBW is CBW-1 as the initial condition in Cell 1 (PCell).

Cell1 (PCell) has constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* containing *SCS-SpecificCarrier* with updated UE specific CBW, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted i . The UE shall reconfigure its UE specific CBW with the updated CBW-2 for the final condition.

The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot $(i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length})$ as defined in clause 8.13C and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1 + 2^{\mu - \mu_{K_{offset}}} K_{offset})$ on the PCell's BWP-1 on CBW-2 for the final condition. The UE shall be continuously scheduled on the PCell's BWP-1 on CBW-2 for the final condition starting from the first DL slot right after slot $(i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length})$.

$T_{RRCprocessingDelay}$ and $T_{CBWchangeDelayRRC}$ are defined in clause 8.13C.

The test equipment verifies the UE specific CBW switching delay in PCell by estimating the time from the moment the RRC Reconfiguration message including updated UE specific CBW configuration is sent until the moment a valid ACK/NACK is received.

Table A.14.4.4.1.1-1: Supported test configurations for UE specific CBW change in SA scenario

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.4.1.1-2: General test parameters for UE specific CBW change in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

Table A.14.4.4.1.1-3: NR Cell specific test parameters for UE specific CBW change in SA scenario

Parameter			Unit	Cell 1
Frequency Range				FR1
Duplex mode		Config 1, 2		FDD
BW _{channel}		Config 1, 2		10 MHz: N _{RB,c} = 52
Serving Satellite Configuration		Config 1, 2		[SSC.1] or [SSC.2] [Note: SSC.1 and SSC.2 are Serving Satellite Configurations for GSO and NGSO, respectively. The selection between the two is up to UE capability, and SSC.2 is selected if DUT supports both]
Active DL BWP ID		Config 1, 2		1
Initial DL BWP Configuration (BWP-1)		Config 1, 2		DLBWP.0.2
Initial UL BWP Configuration		Config 1, 2		ULBWP.0.2
Initial Condition	Active DLCBW-1 Configuration	Config 1, 2		DLCBW.1.1
	Active UL CBW-1 Configuration	Config 1, 2		ULCBW.1.1
Final Condition	Active DLCBW-1 Configuration	Config 1, 2		DLCBW.1.2
	Active UL CBW-1 Configuration	Config 1, 2		ULCBW.1.2
PDSCH Reference measurement channel		Config 1, 2		SR.1.1 FDD
RMSI CORESET parameters		Config 1, 2		CR.1.1 FDD
Dedicated CORESET parameters		Config 1, 2		CCR.1.1 FDD
OCNG Patterns				OP.1
SSB Configuration		Config 1, 2		SSB.1 FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1, 2		TRS.1.1 FDD
Antenna Configuration				1x2 Low
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS ^(Note 1)				
EPRE ratio of OCNG to OCNG DMRS ^(Note 1)				
N _{oc} ^{Note 2}				
SS-RSRP ^{Note 3}		Config 1, 2	dBm/SCS	-87
Ê _s /I _{ot}			dB	17
Ê _s /N _{oc}			dB	17

Io ^{Note3}	Config 1, 2	dBm/ 9.36MHz	-58.96
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.14.4.4.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the PCell from the first DL slot that occurs right after the beginning of slot $(i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length})$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1 + 2^{\mu - \mu_{K_{offset}}} K_{offset})$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed UE specific CBW change delay on the PCell to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.14.4.5 Pathloss reference signal switching delay

A.14.4.5.1 MAC-CE based pathloss reference signal switch delay

A.14.4.5.1.1 Test Purpose and Environment

The purpose of this test is to verify the MAC-CE based pathloss reference signal switch delay requirement defined in clause 8.14C.

The supported test configurations are shown in Table A.14.4.5.1.1-1. The test scenario comprises of one cell (Cell 1) as given in Table A.14.4.5.1.1-2. Cell-specific parameters of the cell are specified in Table A.14.4.5.1.1-3 below.

The test consists of 3 successive time periods, with duration of T1, T2 and T3, respectively.

Prior to the start of the time duration T1,

- UE is connected to Cell 1 on radio channel 1.
- UE shall be fully synchronized to SSB #0.

During T1,

- The UE shall track SSB #1 so that SSB #1 as a pathloss reference signal is known to the UE.

Time period T2 starts when the UE is configured of the power headroom reporting functionality by upper layers by the test equipment and the UE shall transmit a PHR during T2.

During T2,

- UE is configured with a *phr-ProhibitTimer* timer value for Cell 1.
- UE is configured with a *phr-Tx-PowerFactorChange* value for Cell 1.

During T3,

Time period T3 starts when a PDSCH carrying MAC-CE activation for pathloss reference signal switch, sent from the test equipment to the UE to switch the pathloss reference signal from SSB 0 to SSB 1, is received at the UE side in Cell1's slot # denoted i . The UE shall switch its pathloss reference signal to the target one and send PHR.

The UE shall be able to apply the target pathloss reference signal of the serving cell on which pathloss reference signal switch occurs no later than the slot $i + T_{HARQ} + \left\lceil \frac{3\text{ms} + 5 \cdot T_{\text{target_PL-RS}} + 2\text{ms}}{NR \text{ slot length}} \right\rceil$ as defined in clause 8.14. The UE shall be able to apply old pathloss reference signals until the slot $i + T_{HARQ} + 3N_{\text{slot}}^{\text{subframe},\mu}$ as defined in clause 8.14.

The test equipment verifies the pathloss RS switch time by counting the slots from the time when the pathloss RS switch command is transmitted till a PHR is received during T3.

Table A.14.4.5.1.1-1: MAC-CE based pathloss reference signal switch supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.4.5.1.1-2: General test parameters for MAC-CE based pathloss reference signal switch

Parameter		Unit	Value	Comment
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1, 2		FDD	
DL initial BWP configuration	Config 1, 2		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2,		ULBWP.1.1	
CORESET Reference Channel	Config 1, 2		CR.1.1 FDD	
SSB Configuration	Config 1, 2		SSB.1 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 kHz	
SSB index assigned as pathloss RS			0 in T1, 0 in T2, 1 in T3	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			1x2 Low	
DRX			OFF	
Gap pattern ID			gp0	
<i>phr-ProhibitTimer</i>		sub frame	0	
<i>phr-Tx-PowerFactorChange</i>		dB	5	
<i>phr-PeriodicTimer</i>		sub frame	infinity	
Filter coefficient			0	L3 filtering is not used

T1	s	[2]	
T2	s	[2]	
T3	s	0.2	

Table A.14.4.5.1.1-3: NR Cell specific test parameters for MAC-CE based pathloss reference signal switch

Parameter			Unit	Test 1		
				T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS			dB	4		
EPRE ratio of PDCCH to PDCCH DMRS			dB	0		
EPRE ratio of PBCH DMRS to SSS			dB	0		
EPRE ratio of PBCH to PBCH DMRS			dB			
EPRE ratio of PSS to SSS			dB			
EPRE ratio of PDSCH DMRS to SSS			dB			
EPRE ratio of PDSCH to PDSCH DMRS			dB			
EPRE ratio of OCNG DMRS to SSS			dB			
EPRE ratio of OCNG to OCNG DMRS			dB			
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	[7]		
	N_{oc}	Config 1, 2	dBm/ 15kHz z	[-101]		
	$\hat{E}_s / N_{oc}$		dB	[7]		
	SS- RSRP Note 4	Config 1	dBm/ SCS	[-94]		
		Config 2		[-94]		
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	[-3]		
	N_{oc}	Config 1, 2	dBm/ 15kHz z	[-101]		
	$\hat{E}_s / N_{oc}$		dB	[-3]		
	SS- RSRP Note 4	Config 1	dBm/ SCS	[-104]		
		Config 2		[-104]		
Io Note 5	Config 1, 2		dBm	-65.3/9.36MHz		
	Config 3			-59.2/38.16MHz		
Propagation condition				AWGN		
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.						
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.						
Note 5: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.						

A.14.4.5.1.2 Test Requirements

During T3, the UE shall start to send the PHR for PCell no later than the slot $i + T_{HARQ} + \left\lceil \frac{3ms + 5 \cdot T_{target_PL-RS} + 2ms}{NR\ slot\ length} \right\rceil$.

During T3, the UE shall start to send the PHR for PCell no earlier than the slot $i + T_{HARQ} + 3N_{slot}^{subframe, \mu}$.

Where, T_{HARQ} is the timing between pathloss reference MAC-CE activation command and acknowledgement as specified in [7], T_{target_PL-RS} is the periodicity of the target pathloss reference signal which is SSB in this test.

During T3, UE shall send L1-RSRP report with measurement results for both SSB0 and SSB1.

All of the above test requirements shall be fulfilled in order for the observed pathloss RS switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

Note: The UE shall be given proper uplink transmission grant during T2 and T3.

A.14.5 Measurement procedure

A.14.5.1 Intra-frequency Measurements

A.14.5.1.1 SA event triggered reporting tests without gap under non-DRX

A.14.5.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2C.5.1 and 9.2C.5.2.

A.14.5.1.1.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table A.14.5.1.1.2-1 and A.14.5.1.1.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

UE is configured with 2 non-overlapping SMTCs for the intra-frequency measurement. The SMTC periodicity is 20ms, and SMTC1 is associated with Cell 1 with offset 0, and SMTC2 is associated with Cell 2 with offset 10ms.

Table A.14.5.1.1.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.5.1.1.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	
SMTC1 configuration		1	SMTC.1	Period: 20ms, offset: 0
SMTC2 configuration		2	SMTC.4	Period: 20ms, offset: 10ms

A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2		OFF
Time offset between serving and neighbour cells		1, 2	10 ms	Asynchronous cells. The timing of Cell 2 is 10ms later than the timing of Cell 1.
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.14.5.1.1.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS Configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	--64.60	-62.25
Propagation Condition		1, 2	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.14.5.1.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.1.2 SA event triggered reporting tests without gap under DRX

A.14.5.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2C.5.1 and 9.2C.5.2.

A.14.5.1.2.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.14.5.1.2.2-1, A.14.5.1.2.2-2 and A.14.5.1.2.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

UE is configured with 1 SMTC for the intra-frequency measurement. Both Cell 1 and Cell 2 are associated with the configured SMTC.

Table A.14.5.1.2.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.5.1.2.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	Cell 1		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2		

SMTC configuration		1, 2	SMTC.2	
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	DRX.1	DRX. 7
Time offset between serving and neighbour cells		1, 2	3 μ s	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	5	10

Table A.14.5.1.2.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1, 2	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.14.5.1.2.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. X=1280 for test configuration 2 and if UE indicates ‘n1’ for *maxNumber-NGSO-SatellitesWithinOneSMTC*, otherwise X=920.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than Y ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. Y=12800 for test configuration 2 and if UE indicates ‘n1’ for *maxNumber-NGSO-SatellitesWithinOneSMTC*, otherwise Y=6400.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.1.3 SA event triggered reporting tests without gap under non-DRX with SSB index reading

A.14.5.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2C.5.1 and 9.2C.5.2.

A.14.5.1.3.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for FDD PCell and neighbour cell are given in Table A.14.5.1.3.2-1 and A.14.5.1.3.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

UE is configured with 2 overlapping SMTC for the intra-frequency measurement. The SMTC periodicity is 20ms, and SMTC1 is associated with Cell 1 with offset 0, and SMTC2 is associated with Cell 2 with offset 17ms.

Table A.14.5.1.3.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.5.1.3.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
NTN reference configuration		1	TBD	For GSO

		2	TBD	For NGSO
RF Channel Number		1, 2	1: Cell 1 and Cell 2	
SSB configuration		1, 2	SSB.1 FR1	
SMTC1 configuration		1, 2	SMTC.2	
SMTC2 configuration		1, 2	SMTC.6	
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX	ms	1, 2		OFF
Time offset between serving and neighbour cells		1, 2	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms earlier than the timing of Cell 1.
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.14.5.1.3.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0,1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	--64.60	-62.25
Propagation Condition		1, 2	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.5.1.3.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test. X=920 for test configuration 2 and if UE indicates 'n1' for *maxNumber-NGSO-SatellitesWithinOneSMTC*, otherwise X=800.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.1.4 SA event triggered reporting tests with single measurement gap under non-DRX for satellite access

A.14.5.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2C.6.1 and 9.2C.6.2.

A.14.5.1.4.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters are given in Table A.14.5.1.4.2-1 and A.14.5.1.4.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

The UE shall be provided with the valid information about the SAN serving each cell before the test.

UE is configured with 1 SMTC for the intra-frequency measurement. Both Cell 1 and Cell 2 are associated with the configured SMTC.

Table A.14.5.1.4.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note:	The UE is only required to be tested in one of the supported test configurations.

Table A.14.5.1.4.2-2: General test parameters for SA intra-frequency event triggered reporting with single measurement gap for PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	
Measurement gap type		1, 2	Per-UE gaps	
Gap Pattern ID		1, 2	0	As specified in clause 9.1.2-1.
Measurement gap repetition periodicity	ms	1, 2	40	
Measurement gap length	ms	1, 2	6	
Measurement gap offset	ms	1, 2	39	
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX	ms	1, 2		OFF
Time offset between serving and neighbour cells		1,2	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.14.5.1.4.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with single measurement gap for PCell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
SMTC configuration		1, 2	SMTC.2		SMTC.2	
CSI-RS parameters		1, 2	CSI-RS.1.2 FDD resource #0		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.2 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2	CSI-RS		SSB	

N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1, 2	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.14.5.1.4.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. X=1600 for test configuration 2 and if UE indicates 'n1' for *maxNumber-NGSO-SatellitesWithinOneSMTC*, otherwise X=1000.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.1.5 SA event triggered reporting tests with FNO concurrent gaps under DRX for satellite access

A.14.5.1.5.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2C.6.1 and 9.2C.6.2.

A.14.5.1.5.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters are given in Table A.14.5.1.5.2-1, A. 14.5.1.5.2-2 and A. 14.5.1.5.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2 and Cell 3.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

The UE shall be provided with the valid information about the SAN serving each cell before the test.

The UE is configured with 2 FNO concurrent measurement gaps for the intra-frequency measurement. Serving Cell 1 is expected to be measured within MeasGapId #0 and Neighbour Cell 2 is expected to be measured within MeasGapId #1.

Table A.14.5.1.5.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.14.5.1.5.2-2: General test parameters for SA intra-frequency event triggered reporting with FNO concurrent gaps for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	Cell 1		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2		
NTN reference configuration		1	TBD		For GSO
		2	TBD		For NGSO
Measurement gap type		1, 2	Per-UE gap		
Gap Pattern ID		1	1		As specified in clause 9.1.2-1.
Measurement gap repetition periodicity	ms	1, 2	40		
Measurement gap length	ms	1, 2	6		
Measurement gap offset	ms	1, 2	19 for MeasGapId #0 4 for MeasGapId #1		
A3-Offset	dB	1, 2	-4.5		
CP length		1, 2	Normal		
Hysteresis	dB	1, 2	0		
Time To Trigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1, 2	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1, 2	5		
T2	s	1, 2	5	10	

Table A.14.5.1.5.2 -3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with FNO concurrent gaps for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	

		2	SSC.2		NSC.2	
SSB configuration		1, 2	SSB.1 FR1		SSB.7 FR1	
SMTc configuration		1, 2	SMTc.2		SMTc.Y	
CSI-RS parameters		1, 2	CSI-RS.1.2 FDD resource #0		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.2 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1, 2	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Table A.14.5.1.5.2-4: Void

Table A.14.5.1.5.2-5: Void

A.15.5.1.5.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.1.6 SA event triggered reporting tests with PPO concurrent gaps under non-DRX with SSB index reading for satellite access

A.14.5.1.6.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2C.6.1 and 9.2C.6.2.

A.14.5.1.6.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for FDD PCell and neighbour cells are given in Table A.14.5.1.6.2-1 and A.14.5.1.6.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

The UE shall be provided with the valid information about the SAN serving each cell before the test.

The UE is configured with 2 PPO concurrent measurement gaps for the intra-frequency measurement. Serving Cell 1 is expected to be measured within MeasGapId #0 and Neighbour Cell 2 is expected to be measured within MeasGapId #1. And the priority for MeasGapId #1 is higher than the priority for MeasGapId #0.

Table A.14.5.1.6.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.14.5.1.6.2-2: General test parameters for SA intra-frequency event triggered reporting with PPO concurrent gaps for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	
Measurement gap type		1, 2	Per-UE gap	
Gap Pattern ID		1, 2	0 for MeasGapId #0 1 for MeasGapId #1	As specified in clause 9.1.2-1.
Measurement gap repetition periodicity	ms	1, 2	40ms for MeasGapId #0 80ms for MeasGapId #1	
Measurement gap length	ms	1, 2	6	

Measurement gap offset	ms	1, 2	39 for MeasGapId #0 4 for MeasGapId #1	
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX	ms	1, 2		OFF
Time offset between serving and neighbour cells		1, 2	5 ms	Asynchronous cells. The timing of Cell 2 is 5ms later than the timing of serving Cell 1.
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.14.5.1.6.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with PPO concurrent gaps for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
SMTc configuration		1, 2	SMTc.2		SMTc.Y	
CSI-RS parameters		1, 2	CSI-RS.1.2 FDD resource #0		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.2 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.2		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.2		ULBWP.1.1	
RLM-RS		1, 2	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98			
N_{oc} Note 2	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1, 2	AWGN			

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.5.1.6.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1240 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.2 Inter-frequency Measurements

A.14.5.2.1 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used with single gap for satellite access

A.14.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3C.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.14.5.2.1.1-1, A.14.5.2.1.1-2 and A.14.5.2.1.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.14.5.2.1.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.14.5.2.1.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note 1:	If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.
Note 2:	target NR cell has the same SCS, BW and duplex mode as NR serving cell

Table A.14.5.2.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	9	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	Config 1,2	5	
T2	s	Config 1,2	1	

Table A.14.5.2.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2		
				T1	T2	T1	T2	
NR RF Channel Number			Config 1,2	1		2		
Satellite information			Config 1	SSC.1		NSC.1		
			Config 2	SSC.2		NSC.2		
Duplex mode			Config 1,2	FDD				
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52				
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52				
BWP configuration	Initial DL BWP	Config 1	Config 1,2	DLBWP.0.1		NA		
	Initial UL BWP				ULBWP.0.1		NA	
	Dedicated DL BWP				DLBWP.1.1		NA	
	Dedicated UL BWP				ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.1 FDD		NA		
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2	OP.1		OP.1		
PDSCH Reference measurement channel			Config 1,2	SR.1.1 FDD				
RMSI CORESET Reference Channel			Config 1,2	CR.1.1 FDD				

Dedicated CORESET Reference Channel		Config 1,2	CCR.1.1 FDD			
SSB parameters		Config 1,2	SSB.1 FR1		SSB.5 FR1	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.2		SMTC.5	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15			
EPRE ratio of PSS to SSS		Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15 kHz	Config 1,2	-98		-98	
N_{oc}^{Note2}	dBm/S CS	Config 1,2	-98		-98	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-94	-94	-Infinity	-91
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	-Infinity	7
I_o^{Note3}	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26
Propagation Condition		Config 1,2	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

A.14.5.2.1.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.2.2 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used with single gap for satellite access

A.14.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3C.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.14.5.2.2.1-1, A.14.5.2.2.1-2 and A.14.5.2.2.1-3.

In test 1&2 measurement gap pattern configuration # 0 as defined in Table A.14.5.2.2.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.14.5.2.2.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note 1:	If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.
Note 2:	target NR cell has the same SCS, BW and duplex mode as NR serving cell

Table A.14.5.2.2.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	9		
A3-Offset	dB	Config 1,2	-6		
Hysteresis	dB	Config 1,2	0		
CP length		Config 1,2	Normal		
TimeToTrigger	s	Config 1,2	0		
Filter coefficient		Config 1,2	0		L3 filtering is not used
DRX		Config 1,2	DRX.1	DRX. 7	As specified in clause A.3.3

Time offset between serving and neighbour cells		Config 1,2	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	Config 1,2	5		
T2	s	Config 1,2	[1.1]	[11]	

Table A.14.5.2.2.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2	
Satellite information			Config 1	SSC.1		NSC.1	
			Config 2	SSC.2		NSC.2	
Duplex mode			Config 1,2	FDD			
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52			
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52			
BWP configuration	Initial DL BWP		Config 1,2	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.1 FDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2	SR.1.1 FDD			
RMSI CORESET Reference Channel			Config 1,2	CR.1.1 FDD			
Dedicated CORESET Reference Channel			Config 1,2	CCR.1.1 FDD			
SSB parameters			Config 1,2	SSB.1 FR1		SSB.5 FR1	
SMTC configuration defined in A.3.11			Config 1,2	SMTC.2		SMTC.5	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N _{oc} ^{Note2}		dBm/15 kHz	Config 1,2	-98		-98	

N_{oc} ^{Note2}	dBm/S CS	Config 1,2	-98		-98	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-94	-94	-Infinity	-91
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	-Infinity	7
I_o ^{Note3}	dBm/9. 36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
Propagation Condition		Config 1,2	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

Table A.14.5.2.2.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1	Test2	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.14.5.2.2.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.14.5.2.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than [1080] ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than [10240] ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.2.3 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used with single gap for satellite access

A.14.5.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3C.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.14.5.2.3.1-1, A.14.5.2.3.1-2 and A.14.5.2.3.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.14.5.2.3.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.14.5.2.3.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note 1: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.14.5.2.3.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
Parameter	Unit	Test configuration	Test 1 Value	Comment
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	9	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	Config 1,2	5	

T2	s	Config 1,2	[1.1]	
----	---	------------	-------	--

Table A.14.5.2.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2	
Duplex mode			Config 1,2	FDD			
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52			
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52			
BWP configuration	Initial DL BWP	Config 1	Config 1,2	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,2	TRS.1.1 FDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2	SR.1.1 FDD			
RMSI CORESET Reference Channel			Config 1,2	CR.1.1 FDD			
Dedicated CORESET Reference Channel			Config 1,2	CCR.1.1 FDD			
SSB parameters			Config 1,2	SSB.1 FR1		SSB.5 FR1	
SMTC configuration defined in A.3.11			Config 1,2	SMTC.2		SMTC.5	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15			
EPRE ratio of PSS to SSS			Config 1,2	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}		dBm/15 kHz	Config 1,2	-98		-98	
N_{oc}^{Note2}		dBm/SCS	Config 1,2	-98		-98	
SS-RSRP ^{Note 3}		dBm/SCS	Config 1,2	-94	-94	-Infinity	-91
$\hat{E}_s/I_{ot}$		dB	Config 1,2	4	4	-Infinity	7

$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	-Infinity	7
I_0 ^{Note3}	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
Propagation Condition		Config 1,2	AWGN		AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					

A.14.5.2.3.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than [1040] ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.2.4 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used with two gaps in fully non-overlapped for satellite access

A.14.5.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the multiple gaps capable UE makes correct reporting of events. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3C.4.

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2, and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.14.5.2.4.1-1, A.14.5.2.4.1-2 and A.14.5.2.4.1-3.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.14.5.2.4.1-2 is provided.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3.

Table A.14.5.2.4.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note 1:	If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.
Note 2:	target NR cell has the same SCS, BW and duplex mode as NR serving cell

Table A.14.5.2.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell2 and NR cell 3	NR cell 2 and NR cell 3 are on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0 for MeasGapId #0 0 for MeasGapId #1	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	9 for MeasGapId #0 19 for MeasGapId #1	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	
CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between serving and neighbour cell 2,3		Config 1,2	3ms	Asynchronous cells. The timing of Cell 2 and Cell 3 is 3ms later than the timing of Cell 1.
T1	s	Config 1,2	5	
T2	s	Config 1,2	[1]	

Table A.14.5.2.4.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2		2	
Satellite information			Config 1	SSC.1		NSC.1			
			Config 2	SSC.2		NSC.2			
Duplex mode			Config 1,2	FDD					
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52					
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52					
BWP configuration	Initial DL BWP		Config 1,2	DLBWP.0.1		NA		NA	
	Initial UL BWP			ULBWP.0.1		NA		NA	
	Dedicated DL BWP			DLBWP.1.1		NA		NA	
	Dedicated UL BWP			ULBWP.1.1		NA		NA	
TRS configuration			Config 1,2	TRS.1.1 FDD		NA		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2	SR.1.1 FDD					
RMSI CORESET Reference Channel Dedicated CORESET Reference Channel			Config 1,2	CR.1.1 FDD					
			Config 1,2	CCR.1.1 FDD					

SSB parameters		Config 1,2	SSB.1 FR1		SSB.5 FR1		SSB.1 FR1	
SMTC configuration defined in A.3.11		Config 1,2	SMTC.2		SMTC.Y		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2	15					
EPRE ratio of PSS to SSS		Config 1,2	0		0		0	
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} ^{Note2}	dBm/15 kHz	Config 1,2	-98		-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2	-98		-98		-98	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-94	-94	- Infinit y	-91	-Infinity	-91
$\hat{E}_s/I_{ot}$	dB	Config 1,2	4	4	- Infinit y	7	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	- Infinit y	7	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2	-64.59	- 64.59	- 70.05	- 62.26	-70.05	-62.26
Propagation Condition		Config 1,2	AWGN		AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.								

A.14.5.2.4.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than [920] ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.2.5 void

A.14.5.2.5.1 void

A.14.5.2.5.2 void

A.14.5.2.6 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used with two gaps in partially partial overlapping for satellite access

A.14.5.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the multiple gaps capable UE makes correct reporting of events. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3C.4.

In this test, there are three cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2, and NR cell 3 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.14.5.2.6.1-1, A.14.5.2.6.1-2 and A.14.5.2.6.1-3.

In test 1 measurement gap pattern configuration # 0 and #1 as defined in Table A.14.5.2.6.1-2 are provided. MeasGapId #1 is configured with a higher priority than MeasGapId #0.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2 and NR cell 3.

Table A.14.5.2.6.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note 1: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	
Note 2: target NR cells have the same SCS, BW and duplex mode as NR serving cell	

Table A.14.5.2.6.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2	NR cell2 and NR cell 3	NR cell 2 and NR cell 3 are on NR RF channel number 2.
Gap Pattern Id		Config 1,2	0 for MeasGapId #0 1 for MeasGapId #1	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2	39 for MeasGapId #0 4 for MeasGapId #1	
A3-Offset	dB	Config 1,2	-6	
Hysteresis	dB	Config 1,2	0	

CP length		Config 1,2	Normal	
TimeToTrigger	s	Config 1,2	0	
Filter coefficient		Config 1,2	0	L3 filtering is not used
DRX		Config 1,2	OFF	DRX is not used
Time offset between serving and neighbour cell 1		Config 1,2	3μs	Synchronous.
Time offset between serving and neighbour cell 2		Config 1,2	5ms	Asynchronous. The timing of Cell 3 is 5ms later than the timing of Cell 1.
T1	s	Config 1,2	5	
T2	s	Config 1,2	1.5	

Table A.14.5.2.6.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2		Cell 3	
				T1	T2	T1	T2	T1	T2
NR RF Channel Number			Config 1,2	1		2		2	
Satellite information			Config 1	SSC.1		NSC.1			
			Config 2	SSC.2		NSC.2			
Duplex mode			Config 1,2	FDD					
BW _{channel}		MHz	Config 1,2	10: N _{RB,c} = 52					
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52					
BWP configuration	Initial DL BWP		Config 1,2	DLBWP.0.1		NA		NA	
	Initial UL BWP			ULBWP.0.1		NA		NA	
	Dedicated DL BWP			DLBWP.1.1		NA		NA	
	Dedicated UL BWP			ULBWP.1.1		NA		NA	
TRS configuration			Config 1,2	TRS.1.1 FDD		NA		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2	OP.1		OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2	SR.1.1 FDD					
RMSI CORESET Reference Channel Dedicated CORESET Reference Channel			Config 1,2	CR.1.1 FDD					
			Config 1,2	CCR.1.1 FDD					
SSB parameters			Config 1,2	SSB.1 FR1		SSB.1 FR1		SSB.1 FR1	
SMTC configuration defined in A.3.11			Config 1,2	SMTC.2		SMTC.2		SMTC.Y	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2	15					
EPRE ratio of PSS to SSS			Config 1,2	0		0		0	
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									

EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} ^{Note2}	dBm/15 kHz	Config 1,2	-98	-98	-98	-98	-98	-98
N_{oc} ^{Note2}	dBm/S CS	Config 1,2	-98	-98	-98	-98	-98	-98
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2	-94	-94	-Infinity	-91	-Infinity	-91
$\hat{E}_s/I_{tot}$	dB	Config 1,2	4	4	-Infinity	7	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2	4	4	-Infinity	7	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.26	-70.05	-62.26
Propagation Condition		Config 1,2	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.								

A.14.5.2.6.2 Test Requirements

In test 1 and 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.2.7 Event triggered reporting test without gap under non-DRX

A.14.5.2.7.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements in clauses 9.3C.7.

A.14.5.2.7.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) on NR RF channel 1 and a FR1 neighbour cell (Cell 2) on NR RF channel 2. The test parameters for PCell and neighbour cell are given in Table A.14.5.2.7.2-1, A.14.5.2.7.2-2 and A.14.5.2.7.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3

is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

UE is configured with 2 non-overlapping SMTCs for the inter-frequency measurement. The SMTC periodicity is 40ms, and SMTC1 is associated with Cell 1 with offset 0, and SMTC2 is associated with Cell 2 with offset 20ms.

Table A.14.5.2.7.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.5.2.7.2-2: General test parameters for inter-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	
SMTC1 configuration		1	SMTC.1	Period: 20ms, offset: 0
SMTC2 configuration		2	SMTC.4	Period: 20ms, offset: 10ms
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2		OFF
Time offset between serving and neighbour cells		1, 2	20 ms	Asynchronous cells. The timing of Cell 2 is 20ms later than the timing of Cell 1.
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.14.5.2.7.2-3: NR Cell specific test parameters for inter-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	

TRS Configuration		1, 2	TRS.1.1 FDD			N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1			DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1			DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1			ULBWP.1.1	
RLM-RS		1, 2	SSB			SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98				
N_{oc} Note 2	dBm/15 kHz	1, 2	-98				
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46	
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4	
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94	
I_o	dBm/9.36 MHz	1, 2	-64.60	-62.25	-64.60	-62.25	
Propagation Condition		1, 2	AWGN				
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.14.5.2.7.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.2.8 Event triggered reporting tests without gap under DRX

A.14.5.2.8.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the inter-frequency cell search requirements in clauses 9.3C.7.

A.14.5.2.8.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) on NR RF channel 1 and a FR1 neighbour cell (Cell 2) on NR RF channel 2. The test parameters for PCell are given in Table A.14.5.2.8.2-1, A.14.5.2.8.2-2 and A.14.5.2.8.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

UE is configured with 1 SMTC for the inter-frequency measurement. Both Cell 1 and Cell 2 are associated with the configured SMTC.

Table A.14.5.2.8.2-1: Supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.5.2.8.2-2: General test parameters for inter-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	Cell 1		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
NTN reference configuration		1	TBD		For GSO
		2	TBD		For NGSO
RF Channel Number		1, 2	1: Cell 1 and Cell 2		
SMTC configuration		1, 2	SMTC.2		
A3-Offset	dB	1, 2	-4.5		
CP length		1, 2	Normal		
Hysteresis	dB	1, 2	0		
Time To Trigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1, 2	3 μ s		Synchronous cells
T1	s	1, 2	5		
T2	s	1, 2	5	10	

Table A.14.5.2.8.2-3: NR Cell specific test parameters for inter-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
Satellite information		1	SSC.1		NSC.1	
		2	SSC.2		NSC.2	
SSB configuration		1, 2	SSB.1 FR1		SSB.1 FR1	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	

Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD			N/A	
OCNG Patterns		1, 2	OP.1			OP.1	
TRS configuration		1, 2	TRS.1.1 FDD			N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1			DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1			DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1			ULBWP.1.1	
RLM-RS		1, 2	SSB			SSB	
N_{oc} Note 2	dBm/SCS	1, 2	-98				
N_{oc} Note 2	dBm/15 kHz	1, 2	-98				
$\hat{E}_s / I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46	
$\hat{E}_s / N_{oc}$	dB	1, 2	4	4	-Infinity	4	
SS-RSRP Note 3	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94	
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	--64.60	-62.25	
Propagation Condition		1, 2	AWGN				
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.14.5.2.8.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. X=1280 for test configuration 2 and if UE indicates 'n1' for *maxNumber-NGSO-SatellitesWithinOneSMTC*, otherwise X=920.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than Y ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test. Y=12800 for test configuration 2 and if UE indicates 'n1' for *maxNumber-NGSO-SatellitesWithinOneSMTC*, otherwise Y=6400.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.3 L1-RSRP measurement for beam reporting for satellite access

A.14.5.3.1 SSB based L1-RSRP measurement for satellite access when DRX is not used

A.14.5.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5.4C.1, with the testing configurations for NR cells served by satellite access node (SAN) in Table A.14.5.3.1.1-1.

Table A.14.5.3.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test for satellite access

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

A.14.5.3.1.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1) which is served by satellite access node (SAN). The test parameters for the Cell 1 are given in Table A.14.5.3.1.2-1 and Table A.14.5.3.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.14.5.3.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1, 2		freq1
Duplex mode	1, 2		FDD
TDD Configuration	1, 2		N/A
BW _{channel}	1, 2	MHz	10: N _{RB,c} = 52
PDSCH Reference measurement channel	1, 2		SR.1.1 FDD
RMSI CORESET Reference Channel	1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	1, 2		CCR.1.1 FDD
SSB configuration	1, 2		SSB.3 FR1

OCNG Patterns	1, 2		OP.1
Initial BWP Configuration	1, 2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1, 2		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1, 2		SMTC.1
TRS Configuration	1, 2		TRS.1.1 FDD
DRX configuration	1, 2		Off
reportConfigType	1, 2		periodic
reportQuantity	1, 2		ssb-Index-RSRP
Number of reported RS	1, 2		2
L1-RSRP reporting period	1, 2	slot	80
T1	1, 2	s	5
T2	1, 2	s	1
EPRE ratio of PSS to SSS	1, 2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1, 2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.14.5.3.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} ^{Note2}	1, 2	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1, 2	dBm/SSB SCS	-94.65			
$\hat{E}_s / I_{ot}$	1, 2	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1, 2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
I_o ^{Note3}	1, 2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
$\hat{E}_s / N_{oc}$	1, 2	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.14.5.3.1.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.3.2 SSB based L1-RSRP measurement for satellite access when DRX is used

A.14.5.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5C.4.1, with the testing configurations for NR cells served by satellite access node (SAN) in Table A.14.5.3.2.1-1.

Table A.14.5.3.2.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test for satellite access

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

A.14.5.3.2.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1) which is served by satellite access node (SAN). The test parameters for the Cell 1 are given in Table A.14.5.3.2.2-1 and Table A.14.5.3.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.14.5.3.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1, 2		freq1
Duplex mode	1, 2		FDD
TDD Configuration	1, 2		N/A
$BW_{channel}$	1, 2	MHz	10: $N_{RB,C} = 52$
PDSCH Reference measurement channel	1, 2		SR.1.1 FDD
RMSI CORESET Reference Channel	1, 2		CR.1.1 FDD

Dedicated CORESET Reference Channel	1, 2		CCR.1.1 FDD
SSB configuration	1, 2		SSB.3 FR1
OCNG Patterns	1, 2		OP.1
Initial BWP Configuration	1, 2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1, 2		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1, 2		SMTC.1
TRS Configuration	1, 2		TRS.1.1 FDD
DRX configuration	1, 2		DRX.3
reportConfigType	1, 2		periodic
reportQuantity	1, 2		ssb-Index-RSRP
Number of reported RS	1, 2		2
L1-RSRP reporting period	1, 2	slot	80
T1	1, 2	s	5
T2	1, 2	s	1
EPRE ratio of PSS to SSS	1, 2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1, 2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.14.5.3.2.2-2: SSB specific test parameters

			T1	T2	T1	T2
N_{oc} ^{Note2}	1, 2	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1, 2	dBm/SSB SCS	-94.65			
$\hat{E}_s/I_{ot}$	1, 2	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1, 2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
I_o ^{Note3}	1, 2	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
$\hat{E}_s/N_{oc}$	1, 2	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						

- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.14.5.3.2.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19C.1.1 and relative accuracy requirement in clause 10.1.19C.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.3.3 CSI-RS based L1-RSRP measurement for satellite access when DRX is not used

A.14.5.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5C.4.2, with the testing configurations for NR cells served by satellite access node (SAN) in Table A.14.5.3.3.1-1.

Table A.14.5.3.3.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test for satellite access

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

A.14.5.3.3.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1) which is served by satellite access node (SAN). The test parameters for the Cell 1 are given in Table A.14.5.3.3.2-1 and Table A.14.5.3.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.14.5.3.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.14.5.3.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1, 2		freq1
Duplex mode	1, 2		FDD
TDD Configuration	1, 2		N/A
BW _{channel}	1, 2	MHz	10: $N_{RB,c} = 52$
PDSCH Reference measurement channel	1, 2		SR.1.1 FDD

RMSI CORESET Reference Channel	1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	1, 2		CCR.1.1 FDD
SSB configuration	1, 2		SSB.3 FR1
CSI-RS configuration	1, 2		CSI-RS 1.3 FDD
OCNG Patterns	1, 2		OP.1
TRS Configuration	1, 2		TRS.1.1 FDD
Initial BWP Configuration	1, 2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1, 2		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1, 2		SMTC.1
DRX configuration	1, 2		Off
reportConfigType	1, 2		aperiodic
reportQuantity	1, 2		cri-RSRP
Number of reported RS	1, 2		2
qcl-Info	1, 2		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1, 2	slots	8
T1	1, 2	s	5
EPRE ratio of PSS to SSS	1, 2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1, 2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.14.5.3.3.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} ^{Note1}	1, 2	dBm/15kHz	-94.65	
N_{oc} ^{Note1}	1, 2	dBm/SSB SCS	-94.65	
$\hat{E}_s / I_{ot}$	1, 2	dB	0	3
CSI-RS RSRP ^{Note2}	1, 2	dBm/SSB SCS	-94.65	-91.65
I_o ^{Note2}	1, 2	dBm/9.36 MHz	-63.69	-61.93
$\hat{E}_s / N_{oc}$	1, 2	dB	0	3
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.14.5.3.3.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.19C.2.1 and relative accuracy requirement in clause 10.1.19C.2.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.5.3.4 CSI-RS based L1-RSRP measurement for satellite access when DRX is used

A.14.5.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5C.4.2, with the testing configurations for NR cells served by satellite access node (SAN) in Table A.14.5.3.4.1-1.

Table A.14.5.3.4.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test for satellite access

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

A.14.5.3.4.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1) which is served by satellite access node (SAN). The test parameters for the Cell 1 are given in Table A.14.5.3.4.2-1 and Table A.14.5.3.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.14.5.3.4.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.14.5.3.4.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1, 2		freq1
Duplex mode	1, 2		FDD
TDD Configuration	1, 2		N/A
BW _{channel}	1, 2	MHz	10: N _{RB,c} = 52

PDSCH Reference measurement channel	1, 2		SR.1.1 FDD
RMSI CORESET Reference Channel	1, 2		CR.1.1 FDD
Dedicated CORESET Reference Channel	1, 2		CCR.1.1 FDD
SSB configuration	1, 2		SSB.3 FR1
CSI-RS configuration	1, 2		CSI-RS 1.3 FDD
OCNG Patterns	1, 2		OP.1
TRS Configuration	1, 2		TRS.1.1 FDD
Initial BWP Configuration	1, 2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1, 2		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1, 2		SMTC.1
DRX configuration	1, 2		DRX.3
reportConfigType	1, 2		aperiodic
reportQuantity	1, 2		cri-RSRP
Number of reported RS	1, 2		2
qcl-Info	1, 2		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1, 2	slots	8
T1	1, 2	s	5
EPRE ratio of PSS to SSS	1, 2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1, 2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.14.5.3.4.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} ^{Note1}	1, 2	dBm/15kHz	-94.65	
N_{oc} ^{Note1}	1, 2	dBm/SSB SCS	-94.65	

$\hat{E}_s / I_{ot}$	1, 2	dB	0	3
CSI-RS RSRP Note2	1, 2	dBm/SSB SCS	-94.65	-91.65
I_o Note2	1, 2	dBm/9.36 MHz	-63.69	-61.93
$\hat{E}_s / N_{oc}$	1, 2	dB	0	3
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.14.5.3.4.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.19C.2.1 and relative accuracy requirement in clause 10.1.19C.2.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.14.6 Measurement Performance requirements

A.14.6.1 SS-RSRP for SAN

A.14.6.1.1 SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell

A.14.6.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.2C.1.1 and 10.1.2C.1.2 for intra-frequency measurements.

A.14.6.1.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.14.6.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.14.6.1.1.2-2. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell.

The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

The NTN reference configuration for Test configuration 1 is defined in TBD for GSO, NTN reference configuration for Test configuration 1 is defined in TBD for NGSO.

Table A.14.6.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz

Note: The UE is only required to be tested in one of the supported test configurations

Table A.14.6.1.1.2-2: SS-RSRP Intra frequency test parameters

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID				489	0	489	0	489	0
SSB ARFCN				freq1		freq1		freq1	
BW _{channel}		Config 1,2	MHz	10: N _{RB,c} = 52					
BWP BW		Config 1,2		10: N _{RB,c} = 52					
Downlink initial BWP configuration				DLBWP.0.1					
Downlink dedicated BWP configuration				DLBWP.1.1					
Uplink initial BWP configuration				ULBWP.0.1					
Uplink dedicated BWP configuration				ULBWP.1.1					
TRS configuration		Config 1,2		TRS.1. 1 FDD	NA	TRS.1 .1 FDD	NA	TRS.1. 1 FDD	NA
DRX Cycle		Config 1,2	ms	Not Applicable					
PDSCH Reference measurement channel		Config 1,2		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel		Config 1,2		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
Control channel RMC		Config 1,2		CCR.1. 1 FDD	-	CCR.1. 1 FDD	-	CCR.1. 1 FDD	-
SSB configuration		Config 1,2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
Time offset with Cell 1		Config 1,2	ms	-	3	-	3	-	3
SMTC configuration		Config 1,2		SMTC.2					
OCNG Patterns				OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing		Config 1,2	kHz	15 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N _{oc} ^{Note2}	Config 1,2	NR_FDD_FR1_A	dBm/15Khz	-106		-88		-114	
N _{oc} ^{Note2}	Config 1,2		dBm/SCS	-106		-88		Same as Noc/15kHz	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	2.46	-5.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6	1	6	1	3	0
SS-RSRP _{Not e3}	Config 1,2	NR_FDD_FR1_A	dBm/SCS	-100	-105	-82	-87	- 111.00	- 114.00
I _o ^{Note3}	Config 1,2	NR_FDD_FR1_A	dBm/ 9.36MHz	-70.09		-52.09		-80.03	
Propagation condition			-	AWGN					
Antenna configuration				1x2					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.									

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.

A.14.6.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for cell 1 and cell 2 shall fulfil absolute requirement in clause 10.1.2C.1.1 and relative requirement in clause 10.1.2C.1.2.

A.14.6.1.2 SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell

A.14.6.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.4C.1.1 and 10.1.4C.1.2 for inter-frequency measurements with the testing configurations for NR cells in Table A.14.6.1.2.1-1.

The UE shall be provided with the valid information about the SAN serving the each cell in the test before the test.

The NTN reference configuration for Test configuration 1 is defined in TBD for GSO, NTN reference configuration for Test configuration 1 is defined in TBD for NGSO.

Table A.14.6.1.2.1-1: Applicable NR configurations for FR1 inter-frequency SS-RSRP accuracy test

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note:	The UE is only required to be tested in one of the supported test configurations

A.14.6.1.2.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.14.6.1.2.2-1 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in Table A.14.6.1.2.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.14.6.1.2.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1, 2		freq1	freq2	freq1	freq2
$BW_{channel}$	1, 2	MHz	10: $N_{RB,c} = 52$		10: $N_{RB,c} = 52$	
PDSCH Reference measurement channel	1, 2		SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel	1, 2		CR.1.1 FDD	-	CR.1.1 FDD	-
Dedicated CORESET Reference Channel	1, 2		CCR.1.1 FDD	-	CCR.1.1 FDD	-
SSB configuration	1, 2		SSB.1 FR1		SSB.1 FR1	
OCNG Patterns	1, 2		OP.1		OP.1	
TRS configuration	1, 2		TRS.1.1 FDD	-	TRS.1.1 FDD	

Initial BWP Configuration	1, 2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1, 2		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
Time offset with Cell 1	1, 2	ms	-	3
SMTC configuration	1, 2		SMTC.2	SMTC.2
EPRE ratio of PSS to SSS	1, 2	dB	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
N_{oc} ^{Note2}	NR_FDD_FR1_A	1,2	dBm/15 kHz	-94.65
N_{oc} ^{Note2}	NR_FDD_FR1_A	1,2	dBm/SSB SCS	-94.65
$\hat{E}_s/I_{ot}$		1,2	dB	10
SS-RSRP ^{Note3}	NR_FDD_FR1_A	1,2	dBm/SCS	-84.65
I_o ^{Note3}	NR_FDD_FR1_A	1,2	dBm/9.36MHz	-56.28
$\hat{E}_s/N_{oc}$		1,2	dB	10
Propagation condition	1,2	-	AWGN	AWGN
Antenna configuration	1,2		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

A.14.6.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirement in clause 10.1.4C.1.1 and relative requirement in clause 10.1.4C.1.2.

A.14.6.2 SS-RSRQ

A.14.6.2.1 SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for satellite access

A.14.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1.7C.

A.14.6.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.14.6.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is tested by using the parameters in Table A.14.6.2.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.14.6.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.	

Table A.14.6.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1,2		FDD					
BW _{channel}	Config 1,2	MHz	10: N _{RB,C} = 52					
Gap Pattern ID			0					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,2		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel	Config 1,2		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
Control Channel RMC	Config 1,2		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
TRS Configuration	Config 1,2		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
OCNG Patterns			OP. 1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 1	Config 1,2	ms	-	3	-	3	-	3
SMTc configuration	Config 1,2		SMTc.2					
SSB configuration	Config 1,2		SSB.1 FR1					
CSI-RS for tracking	Config 1,2		TRS.1.1 FDD					
PDSCH/PDCCH subcarrier spacing	Config 1,2	kHz	15 kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								

EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc}^{Note2}	Config 1,2	NR_FDD_SAB_F R1_A	dBm/15kHz	-85		-101		-114
N_{oc}^{Note2}	Config 1,2	NR_FDD_SAB_F R1_A	dBm/SCS	-85		-101		-114
$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4
SS-RSRP ^{Note3}	Config 1,2	NR_FDD_SAB_F R1_A	dBm/SCS	-82	-82	-103.9	-103.9	-118
SS-RSRQ ^{Note3}		NR_FDD_SAB_F R1_A	dB	-14.84	-14.84	-14.84	-16.76	-17.34
I_o^{Note3}	Config 1,2	NR_FDD_SAB_F R1_A	dBm/9.36MHz	-50		-70		-83.5
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRQ, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.								
Note 5: NR operating band groups are as defined in clause 3.5.2.								
Note 6: void								

A.14.6.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.7C.1.1.

A.14.6.2.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for satellite access

A.14.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause TBD.

A.14.6.2.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.14.6.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.14.6.2.2.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.14.6.2.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Config	Description
1	GSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NGSO, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

Note: If UE supports both NGSO and GSO, the test case Config 1 can be skipped if the UE passes test case Config 2.

Table A.14.6.2.2-2: SS-RSRQ Inter frequency test parameters

Parameter			Unit	Test 1		Test 2		Test 3	
				Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN				freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,2			FDD					
BW _{channel}	Config 1,2		MHz	10: N _{RB,c} = 52					
Gap pattern ID	Config 1,2			0					
BWP BW	Config 1,2			10: N _{RB,c} = 52					
DRX Cycle			ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,2			SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel	Config 1,2			CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1,2			CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
TRS Configuration	Config 1,2			TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
OCNG Patterns				OCNG pattern 1					
Time offset with Cell 1	Config 1,2		ms	-	3	-	3	-	3
SMTC configuration	Config 1,2			SMTC pattern 2					
SSB configuration	Config 1,2			SSB pattern 1 in FR1					
CSI-RS for tracking	Config 1,2			TRS.1.1 FDD					
PDSCH/PDCCH subcarrier spacing	Config 1,2		kHz	15 kHz					
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc}^{Note2}	Config 1,2	NR_FDD_SAB_F R1_A	dBm/15kHz	-80.18		-106		-116	
N_{oc}^{Note2}	Config 1,2	NR_FDD_SAB_F R1_A	dBm/15kHz	-80.18		-106		-116	
$\hat{E}_s / I_{ot}$			dB	-1.75		-1.75		3	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75		-1.75		3	-1.75
SS-RSRP ^{Note3}	Config 1,2	NR_FDD_SAB_F R1_A	dBm/SCS	-81.93	-81.93	-	-	-113	-
						107.75	107.75		117.75
SS-RSRQ ^{Note3}		NR_FDD_SAB_F R1_A	dB	-14.77	-14.77	-14.76	-14.76	-12.56	-
									14.76
I_o^{Note3}	Config 1,2	NR_FDD_SAB_F R1_A	dBm/9.36M Hz	-50		-75.83		-83.28	-
									85.83
Propagation condition			-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.									
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.									

Note 3:	SS-RSRQ, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	NR operating band groups are as defined in clause 3.5.2.

A.14.6.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1.9C.1.1 and 10.1.9C.1.2.

A.14.6.3 SS-SINR

A.14.6.3.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.14.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1.12C.1.1.

A.14.6.3.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.14.6.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.14.6.3.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.14.6.3.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.6.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1, 2		FDD			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1, 2		TRS.1.1 FDD		TRS.1.1 FDD	
PDSCH Reference measurement channel	Config 1, 2		SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD	-	CR.1.1 FDD	

Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.1 FDD	-	CCR.1.1 FDD	-
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
SMTC configuration	Config 1, 2		SMTC.2			
Time offset with Cell 1	Config 1, 2	ms	-	3	-	3
SSB configuration	Config 1, 2		SSB.1 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1, 2	kHz	15			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}		dBm/15kHz	-93		-116	
NR_FDD_SAB_F R1_A,					-115.5	
NR_FDD_SAB_F R1_B					-115	
NR_FDD_SAB_F R1_C					-114.5	
NR_FDD_SAB_F R1_D					-114	
NR_FDD_SAB_F R1_E					-113.5	
NR_FDD_SAB_F R1_F,					-113	
NR_FDD_SAB_F R1_G					-112.5	
NR_FDD_SAB_F R1_H					-112	
NR_FDD_SAB_F R1_I					-111.5	
NR_FDD_SAB_F R1_J						
N_{oc}^{Note2}	Config 1, 2	dBm/SCS	-93		Same as Noc for 15kHz	
$\hat{E}_s / I_{ot}$		dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$		dB	4.54	2.66	-4	-4
SS-RSRP ^{Not e3}	Config 1, 2	dBm/SCS	-88.46	-90.34	-120	-120
					-119.5	-119.5
					-119	-119
					-118.5	-118.5
					-118	-118
					-117.5	-117.5

		NR_FDD_SAB_F R1_G				-117	-117
		NR_FDD_SAB_F R1_H				-116.5	-116.5
		NR_FDD_SAB_F R1_I				-116	-116
		NR_FDD_SAB_F R1_J				-115.5	-115.5
SS-SINR ^{Note3}		NR_FDD_SAB_F R1_A,	dB	0	-3.19	-5.46	-5.46
		NR_FDD_SAB_F R1_B					
		NR_FDD_SAB_F R1_C					
		NR_FDD_SAB_F R1_D					
		NR_FDD_SAB_F R1_E					
		NR_FDD_SAB_F R1_F,					
		NR_FDD_SAB_F R1_G					
		NR_FDD_SAB_F R1_H					
		NR_FDD_SAB_F R1_I					
		NR_FDD_SAB_F R1_J					
Io ^{Note3}	Config 1, 2	NR_FDD_SAB_F R1_A,	dBm/ 9.36MHz		-57.5	-85.51	
		NR_FDD_SAB_F R1_B				-85.01	
		NR_FDD_SAB_F R1_C				-84.51	
		NR_FDD_SAB_F R1_D				-84.01	
		NR_FDD_SAB_F R1_E				-83.51	
		NR_FDD_SAB_F R1_F,				-83.01	
		NR_FDD_SAB_F R1_G				-82.51	
		NR_FDD_SAB_F R1_H				-82.01	
		NR_FDD_SAB_F R1_I				-81.51	
		NR_FDD_SAB_F R1_J				-81.01	
Propagation condition			-	AWGN			
Antenna configuration			-	1x2			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 5: NR operating band groups are as defined in clause 3.5.2.							

A.14.6.3.1.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.12C.1.1.

A.14.6.3.2 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell

A.14.6.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1.14C.1.1 and 10.1.14C.1.2.

A.14.6.3.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.14.6.3.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.14.6.3.2.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.14.6.3.2.2-1: SS-SINR Inter frequency SS-SINR supported test configurations

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.14.6.3.2.2-2: SS-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1, 2		FDD					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
Gap pattern ID			0	-	0	-	0	-
TRS configuration	Config 1, 2		TRS.1.1 FDD		TRS.1.1 FDD		TRS.1.1 FDD	
PDSCH Reference measurement channel	Config 1, 2		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
RMSI CORESET Reference Channel	Config 1, 2		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1, 2		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
OCNG Patterns			OP.1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 1	Config 1, 2	ms	-	3	-	3	-	3
SMTTC configuration	Config 1, 2		SMTTC pattern 2					
SSB configuration	Config 1, 2		SSB.1 FR1					
PDSCH/PDCCH subcarrier spacing	Config 1, 2	kHz	15					

EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} ^{Note2}	Config 1, 2	NR_FDD_SAB_F R1_A,	dBm/15kHz	-88	-108.5	-119.5			
		NR_FDD_SAB_F R1_B				-119			
		NR_FDD_SAB_F R1_C				-118.5			
		NR_FDD_SAB_F R1_D				-118			
		NR_FDD_SAB_F R1_E				-117.5			
		NR_FDD_SAB_F R1_F,				-117			
		NR_FDD_SAB_F R1_G				-116.5			
		NR_FDD_SAB_F R1_H				-116			
		NR_FDD_SAB_F R1_I				-115.5			
		NR_FDD_SAB_F R1_J				-115			
		N_{oc} ^{Note2}				Config 1, 2		dBm/SCS	-88
$\hat{E}_s/I_{ot}$			dB	-1.75	-1.75	20	20	-4.0	-4.0
$\hat{E}_s/N_{oc}$			dB	-1.75		20		-4.0	
SS-RSRP ^{Note3}	Config 1, 2	NR_FDD_SAB_F R1_A,	dBm/SCS	-89.75	-88.5	-123.5			
		NR_FDD_SAB_F R1_B				-123			
		NR_FDD_SAB_F R1_C				-122.5			
		NR_FDD_SAB_F R1_D				-122			
		NR_FDD_SAB_F R1_E				-121.5			
		NR_FDD_SAB_F R1_F,				-121			
		NR_FDD_SAB_F R1_G				-120.5			
		NR_FDD_SAB_F R1_H				-120			

		NR_FDD_SAB_F R1_I				-119.5
		NR_FDD_SAB_F R1_J				-119
SS-SINR ^{Note3}		NR_FDD_SAB_F R1_A,	dB	-1.75	20	-4.0
		NR_FDD_SAB_F R1_B				
		NR_FDD_SAB_F R1_C				
		NR_FDD_SAB_F R1_D				
		NR_FDD_SAB_F R1_E				
		NR_FDD_SAB_F R1_F,				
		NR_FDD_SAB_F R1_G				
		NR_FDD_SAB_F R1_H				
		NR_FDD_SAB_F R1_I				
		NR_FDD_SAB_F R1_J				
Io ^{Note3}	Config 1, 2	NR_FDD_SAB_F R1_A,	dBm/ 9.36MHz	-57.83	-60.5	-90.09
		NR_FDD_SAB_F R1_B				-89.59
		NR_FDD_SAB_F R1_C				-89.09
		NR_FDD_SAB_F R1_D				-88.59
		NR_FDD_SAB_F R1_E				-88.09
		NR_FDD_SAB_F R1_F,				-87.59
		NR_FDD_SAB_F R1_G				-87.09
		NR_FDD_SAB_F R1_H				-86.59
		NR_FDD_SAB_F R1_I				-86.09
		NR_FDD_SAB_F R1_J				-85.59
Propagation condition			-	AWGN		
Antenna configuration			-	1x2		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: NR operating band groups are as defined in clause 3.5.2.						

A.14.6.3.2.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1.14C.1.1 and 10.1.14C.1.2.

A.14.6.4 L1-RSRP measurement for beam reporting

A.14.6.4.1 SSB based L1-RSRP measurement

A.14.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.5C.4 and clause 10.1.19C.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.14.6.4.1.1-1.

Table A.14.6.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

A.14.6.4.1.2 Test parameters

In this set of test cases there one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.14.6.4.1.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.14.6.4.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one SSB resource set with two SSB resources. UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0 and 1.

Table A.14.6.4.1.2-1: FR1 SSB based L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1, 2		freq1	freq1
Duplex mode	1, 2		FDD	FDD
TDD Configuration	1, 2		N/A	N/A
BW _{channel}	1, 2	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52
PDSCH Reference measurement channel	1, 2		SR.1.1 FDD	SR.1.1 FDD
RMSI CORESET Reference Channel	1, 2		CR.1.1 FDD	CR.1.1 FDD
Dedicated CORESET Reference Channel	1, 2		CCR.1.1 FDD	CCR.1.1 FDD
SSB configuration	1, 2		SSB.3 FR1	SSB.3 FR1
OCNG Patterns	1, 2		OP.1	OP.1
Initial BWP Configuration	1, 2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
TRS configuration	1, 2		TRS.1.1 FDD	TRS.1.1 FDD
Dedicated BWP configuration	1, 2		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration	1, 2		SMTC.1	SMTC.1
reportConfigType	1, 2		periodic	periodic
reportQuantity	1, 2		ssb-Index-RSRP	ssb-Index-RSRP
Number of reported RS	1, 2		2	2
L1-RSRP reporting period	1, 2		slot80	slot80
EPRE ratio of PSS to SSS	1, 2	dB	0	0
EPRE ratio of PBCH DMRS to SSS				

EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
N_{oc} Note2	NR_FDD_SAB_FR1_A	1, 2	dBm/15kHz	-94.65	-117
	NR_FDD_SAB_FR1_B				-116.5
	NR_FDD_SAB_FR1_C				-116
	NR_FDD_SAB_FR1_D				-115.5
	NR_FDD_SAB_FR1_E				-115
	NR_FDD_SAB_FR1_F				-114.5
	NR_FDD_SAB_FR1_G				-114
	NR_FDD_SAB_FR1_H				-113.5
	NR_FDD_SAB_FR1_I				-113.5
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1, 2	dBm/SSB SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_I				-113.5
$\hat{E}_s/I_{ot}$		1, 2	dB	10	-3
SSB RS RP Note3	NR_FDD_SAB_FR1_A	1, 2	dBm/SSB SCS	-84.65	-120
	NR_FDD_SAB_FR1_B				-119.5
	NR_FDD_SAB_FR1_C				-119
	NR_FDD_SAB_FR1_D				-118.5
	NR_FDD_SAB_FR1_E				-118
	NR_FDD_SAB_FR1_F				-117.5
	NR_FDD_SAB_FR1_G				-117
	NR_FDD_SAB_FR1_H				-116.5
	NR_FDD_SAB_FR1_I				-116.5
Io Note3	NR_FDD_SAB_FR1_A	1, 2	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_SAB_FR1_B				-86.78
	NR_FDD_SAB_FR1_C				-86.28

NR_FDD_SAB_FR1_D				-85.78
NR_FDD_SAB_FR1_E				-85.28
NR_FDD_SAB_FR1_F				-84.78
NR_FDD_SAB_FR1_G				-84.28
NR_FDD_SAB_FR1_H				-83.78
NR_FDD_SAB_FR1_I				-3
NR_FDD_SAB_FR1_J				AWGN
$\hat{E}_s / N_{oc}$	1, 2	dB	10	AWGN
Propagation condition	1, 2		AWGN	AWGN
Antenna configuration	1, 2		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

A.14.6.4.1.3 Test Requirements

The L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses 10.1.19C.1.

A.14.6.4.2 CSI-RS based L1-RSRP measurement on resource set with repetition off

A.14.6.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.5C.4 and clause 10.1.19C.2 for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.14.6.4.2.1-1.

Table A.14.6.4.2.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Configuration	Description
1	GSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NGSO, NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

A.14.6.4.2.2 Test parameters

In this set of test cases there are one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.14.6.4.2.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.14.6.4.2.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set with two CSI-RS resources. UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.14.6.4.2.2-1: FR1 CSI-RS based L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1, 2		freq1	freq1

Duplex mode		1, 2		FDD	FDD
TDD Configuration		1, 2		N/A	N/A
BW _{channel}		1, 2	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52
PDSCH Reference measurement channel		1, 2		SR.1.1 FDD	SR.1.1 FDD
RMSI CORESET Reference Channel		1, 2		CR.1.1 FDD	CR.1.1 FDD
Dedicated CORESET Reference Channel		1, 2		CCR.1.1 FDD	CCR.1.1 FDD
SSB configuration		1, 2		SSB.3 FR1	SSB.3 FR1
OCNG Patterns		1, 2		OP.1	OP.1
TRS configuration		1, 2		TRS.1.1 FDD	TRS.1.1 FDD
Initial BWP Configuration		1, 2		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration		1, 2		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1, 2		SMTC.1	SMTC.1
CSI-RS		1, 2		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
reportConfigType		1, 2		periodic	periodic
reportQuantity		1, 2		cri-RSRP	cri-RSRP
Number of reported RS		1, 2		2	2
L1-RSRP reporting period		1, 2		slot80	slot80
EPRE ratio of PSS to SSS		1, 2	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
N_{oc} Note2	NR_FDD_SAB_FR1_A	1, 2	dBm/15kHz	-94.65	-117
	NR_FDD_SAB_FR1_B				-116.5
	NR_FDD_SAB_FR1_C				-116
	NR_FDD_SAB_FR1_D				-115.5
	NR_FDD_SAB_FR1_E				
	NR_FDD_SAB_FR1_F				-115
	NR_FDD_SAB_FR1_G				-114.5
	NR_FDD_SAB_FR1_H				-114
N_{oc} Note2	NR_FDD_SAB_FR1_I		-113.5		
	NR_FDD_SAB_FR1_J				
	NR_FDD_SAB_FR1_A	1, 2	dBm/CSI-RS SCS	-94.65	-117
	NR_FDD_SAB_FR1_B				-116.5
	NR_FDD_SAB_FR1_C				-116
	NR_FDD_SAB_FR1_D				-115.5
	NR_FDD_SAB_FR1_E				
	NR_FDD_SAB_FR1_F				-115
NR_FDD_SAB_FR1_G					
NR_FDD_SAB_FR1_H	-114.5				

	NR_FDD_SAB_FR1_I				-114
	NR_FDD_SAB_FR1_J				-113.5
$\hat{E}_s/I_{\text{ot}}$		1, 2	dB	10	-3
CSI-RS RP Note3	NR_FDD_SAB_FR1_A	1, 2	dBm/CSI-RS SCS	-84.65	-120
	NR_FDD_SAB_FR1_B				-119.5
	NR_FDD_SAB_FR1_C				-119
	NR_FDD_SAB_FR1_D				-118.5
	NR_FDD_SAB_FR1_E				-118
	NR_FDD_SAB_FR1_F				-117.5
	NR_FDD_SAB_FR1_G				-117
	NR_FDD_SAB_FR1_H				-116.5
	NR_FDD_SAB_FR1_I				-116.5
Io Note3	NR_FDD_SAB_FR1_A	1, 2	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_SAB_FR1_B				-86.78
	NR_FDD_SAB_FR1_C				-86.28
	NR_FDD_SAB_FR1_D				-85.78
	NR_FDD_SAB_FR1_E				-85.28
	NR_FDD_SAB_FR1_F				-85.28
	NR_FDD_SAB_FR1_G				-84.78
	NR_FDD_SAB_FR1_H				-84.28
	NR_FDD_SAB_FR1_I				-83.78
$\hat{E}_s/N_{\text{oc}}$		1, 2	dB	10	-3
Propagation condition		1, 2		AWGN	AWGN
Antenna configuration		1, 2		1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					

A.14.6.4.2.3 Test Requirements

The L1-RSRP measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 1 shall fulfil the requirements in clause 10.1.19C.2.

A.15 NR standalone tests with one or more NR cells in FR2-2

A.15.1 SA: RRC_IDLE state mobility

A.15.1.1 Cell re-selection to NR

A.15.1.1.1 Cell reselection to FR2-2 intra-frequency NR case

A.15.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements specified in clause 4.2.2.3.

A.15.1.1.1.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.15.1.1.1.2-1, A.15.1.1.1.2-2 and A.15.1.1.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.15.1.1.1.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.15.1.1.1.2-2: General test parameters for intra frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	
	Neighbour cell		1, 2, 3	Cell2	
T2 end condition	Active cell		1, 2, 3	Cell1	
	Neighbour cell		1, 2, 3	Cell2	
Final condition	Active cell		1, 2, 3	Cell1	
	Neighbour cell		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1, 2, 3	3 μ s	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2, 3	SMTC.1	
DRX cycle length		s	1, 2, 3	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3	Not configured	

T1	s	1, 2, 3	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1, 2, 3	386	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2, 3	78	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.15.1.1.1.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2, 3	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			SR.3.1 TDD		
		2	SR.3.1 TDD			SR.3.1 TDD		
		3	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
		2	CR.3.1 TDD			CR.3.1 TDD		
		3	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
		2	CCR.3.1 TDD			CCR.3.1 TDD		
		3	CCR.3.1 TDD			CCR.3.1 TDD		
SSB configuration		1	SSB.3 FR2			SSB.7 FR2		
		2	[SSB.x FR2]			[SSB.x FR2]		
		3	[SSB.x FR2]			[SSB.x FR2]		
OCNG Pattern		1, 2, 3	OP.4			OP.4		
BW _{channel}	MHz	1, 2, 3	100: N _{RB,c} = 66			100: N _{RB,c} = 66		
Data RBs allocated		1, 2, 3	66			66		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Q _{rxlevmin}	dBm/SCS	1	-138			-138		
		2	-132			-132		
		3	-129			-129		
P _{compensation}	dB	1, 2, 3	0			0		
Q _{hysts}	dB	1, 2, 3	0			0		
Q _{offsets, n}	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
AoA setup		1, 2, 3	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s/I_{\alpha}$	dB	1, 2, 3	8	-3	1.5	-infinity	1.5	-3
Beam assumption ^{Note 4}		1, 2, 3	Rough					

N_{oc} ^{Note2}	dBm/SCS	1	-93					
		2	-93					
		3	-90					
N_{oc} ^{Note2}	dBm/15 kHz	1	-102					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1, 2, 3	8	-3	1.5	-infinity	1.5	-3
SS-RSRP ^{Note3}	dBm/SCS	1	-85	-96	-91.5	-infinity	-91.5	-96
		2	-85	-96	-91.5	-infinity	-91.5	-96
		3	-82	-93	-88.5	-infinity	-88.5	-93
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-55.37	-63.25	-60.19	-64.01	-60.19	-63.25
	dBm/380.16 MHz	2	-55.37	-63.25	-60.19	-64.01	-60.19	-63.25
	dBm/380.16 MHz	3	-55.38	-63.26	-60.20	-64.02	-60.20	-63.26
Treselection	s	1, 2, 3	0	0	0	0	0	0
SintrasearchP	dB	1, 2, 3	50			50		
Propagation Condition		1, 2, 3	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation							

A.15.1.1.1.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 386 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than 78 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{\text{detect, NR_Intra}} + T_{\text{SI-NR}}$, and to an already detected cell can be expressed as: $T_{\text{evaluate, NR_intra}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{detect, NR_Intra}}$ See Table 4.2.2.3-1 in clause 4.2.2.3

$T_{\text{evaluate, NR_intra}}$ See Table 4.2.2.3-1 in clause 4.2.2.3

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 385.28 s, allow 386 s for the cell re-selection delay to a newly detectable cell and 78.08 s for the cell re-selection delay to an already detected cell in the test case, which we allow 78 s.

A.15.1.2 Cell reselection to FR2-2 inter-frequency NR case

A.15.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2.2.4.

A.15.1.2.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.15.1.2.2-1, A.15.1.2.2-2 and A.15.1.2.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.15.1.2.2-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.15.1.2.2-2: General test parameters for FR2-2 inter frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2, 3	Cell1	
T1 end condition	Active cell		1, 2, 3	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3	Cell2	
T3 end condition	Active cell		1, 2, 3	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2, 3	Cell1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1, 2, 3	3 μ s	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	[SSB.x FR2-2]	
			2	[SSB.x FR2-2]	
			3	[SSB.x FR2-2]	
SMTC configuration			1, 2, 3	SMTC.1	
DRX cycle length		s	1, 2, 3	1.28	The value shall be used for all cells in the test.

PRACH configuration index		1, 2, 3	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	78	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3	138	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.15.1.2.2-3: Cell specific test parameters for FR2-2 inter frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2, 3	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1, 2, 3	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET parameters		1, 2, 3	CR.3.1 TDD			CR.3.1 TDD		
RMSI CORESET RMC configuration		1, 2, 3	CCR.3.1 TDD			CCR.3.1 TDD		
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-140			-140		
		2	-134			-134		
		3	-131			-131		
Pcompensation	dB	1, 2, 3	0			0		
Qhysts	dB	1, 2, 3	0			0		
Qoffsets, n	dB	1, 2, 3	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP			SS-RSRP		
AoA setup		1, 2, 3	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
Beam assumption ^{Note 4}		1, 2, 3	Rough			Rough		
$\hat{E}_s/I_{\alpha}$	dB	1	10.5	10.5	8	-10.5	-infinity	8.5
		2						
		3						
N_{oc} ^{Note2}	dBm/SCS	1	-93			-93		
		2	-93			-93		
		3	-90			-90		
N_{oc} ^{Note2}	dBm/15 kHz	1, 2, 3	-102			-102		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3	10.5	10.5	8	-10.5	-infinity	8.5

SS-RSRP ^{Note3}	dBm/SCS	1	-83.5	-83.5	-85	-103.5	-infinity	-84.5
		2	-83.5	-83.5	-85	-103.5	-infinity	-84.5
		3	-80.5	-80.5	-82.5	-100.5	-infinity	-81.5
Io	dBm/95.04 MHz	1	-51.97	-51.97	-55.46	-63.64	-64.01	-55.46
	dBm/380.16 MHz	2, 3	-51.99	-51.99	-55.48	-63.66	-64.03	-55.48
Treselection	s	1, 2, 3	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3	50			50		
Thresh _{x, highP}	dB	1, 2, 3	48			48		
Thresh _{serving, lowP}	dB	1, 2, 3	44			44		
Thresh _{x, lowP}	dB	1, 2, 3	50			50		
Propagation Condition		1, 2, 3	AWGN			AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation								

A.15.1.2.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 138 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 78 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$, and to a lower priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$.

Where:

$T_{\text{higher_priority_search}}$ See clause 4.2.2.7

$T_{\text{evaluate, NR_inter}}$ See Table 4.2.2.4-1 in clause 4.2.2.4

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 138.08 s, allow 138 s for the cell re-selection delay to a higher priority cell and 78.08 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 78 s.

A.15.1.3 Cell reselection to FR2-2 intra-frequency NR case for UE fulfilling low mobility relaxed measurement criterion

A.15.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE configured with relaxed measurement criterion specified in clause 4.2.2.9.2.

A.15.1.3.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.15.1.3.2-1, A.15.1.3.2-2 and A.15.1.3.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. During T1 and T2, only criteria *lowMobilityEvaluation* is configured and fulfilled, where $(S_{rxlev_{Ref}} - S_{rxlev}) < S_{SearchDeltaP}$. UE has not registered with network for the tracking area containing cell2.

Table A.15.1.3.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.15.1.3.2-2: General test parameters for FR2-2 intra-frequency NR cell re-selection test case for UE fulfilling low mobility criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2, 3	Cell2	
T1 end condition	Active cell		1, 2, 3	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2, 3	Cell1	
Final condition	Active cell		1, 2, 3	Cell1	The UE reselects to cell 1 during T2 period
	Neighbour cells		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1, 2, 3	3 μ s	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2, 3	SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3	Not configured	
T1		s	1, 2, 3	240	
T2		s	1, 2, 3	240	

Table A.15.1.3.2-3: Cell specific test parameters for FR2-2 intra-frequency NR cell re-selection test case in AWGN for UE fulfilling low mobility criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2, 3	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		SR.3.1 TDD	
		2	SR.3.1 TDD		SR.3.1 TDD	
		3	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
		2	CR.3.1 TDD		CR.3.1 TDD	
		3	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
		2	CCR.3.1 TDD		CCR.3.1 TDD	
		3	CCR.3.1 TDD		CCR.3.1 TDD	
SSB configuration		1	[SSB.x FR2-2]		[SSB.x FR2-2]	
		2	[SSB.x FR2-2]		[SSB.x FR2-2]	
		3	[SSB.x FR2-2]		[SSB.x FR2-2]	
OCNG Pattern		1, 2, 3	OP.4		OP.4	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-134		-134	
		3	-131		-131	
$S_{\text{SearchDeltaP}}$	dB	1, 2, 3	6		6	
$T_{\text{SearchDeltaP}}$	s	1, 2, 3	5		5	
$P_{\text{compensation}}$	dB	1, 2, 3	0		0	
Q_{hyst_s}	dB	1, 2, 3	0		0	
$Q_{\text{offset}_{s,n}}$	dB	1, 2, 3	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
AoA setup		1, 2, 3	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption ^{Note 4}		1, 2, 3	Rough		Rough	
$\hat{E}_s / I_{\text{ot}}$	dB	1, 2, 3	-3	1.5	1.5	-3
N_{oc} ^{Note2}	dBm/SCS	1	-93			
		2	-93			
		3	-90			
N_{oc} ^{Note2}	dBm/15 kHz	1, 2, 3	-102			
$\hat{E}_s / N_{\text{oc}}$	dB	1, 2, 3	-3	1.5	1.5	-3
SS-RSRP ^{Note3}	dBm/SCS	1	-96	-91.5	-91.5	-96
		2	-96	-91.5	-91.5	-96
		3	-93	-88.5	-88.5	-93
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-62.45	-60.19	-60.19	-62.45
	dBm/380.16 MHz	2	-62.45	-60.19	-60.19	-62.45
	dBm/380.16 MHz	3	-62.46	-60.20	-60.20	-62.46
Treselection	s	1, 2, 3	0	0	0	0
SintrasearchP	dB	1, 2, 3	50		50	

Propagation Condition		1, 2, 3	AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation		

A.15.1.3.3 Test Requirements

The cell reselection delay to an already detected cell for UE fulfilling low mobility relaxed criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected cell shall be less than 232 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detectable cell can be expressed as: $T_{\text{evaluate, NR_Intra}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{evaluate, NR_Intra}}$ See Table 4.2.2.9.2-1 in clause 4.2.2.9,

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 231.68 s, allow 232 s for the cell re-selection delay to an already detected cell for UE fulfilling low mobility criterion in the test case.

A.15.1.4 Cell reselection to FR2-2 intra-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion

A.15.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE configured with relaxed measurement criterion specified in clause 4.2.2.9.3.

A.15.1.4.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.15.1.4.2-1, A.15.1.4.2-2 and A.15.1.4.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. During T1 and T2, only criteria *cellEdgeEvaluation* is configured and fulfilled, where $S_{rxlev} > S_{SearchThresholdP}$. UE has not registered with network for the tracking area containing cell2.

Table A.15.1.4.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations.

Table A.15.1.4.2-2: General test parameters for FR2-2 intra-frequency NR cell re-selection test case for UE fulfilling not-at-cell edge criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2, 3	Cell2	
T1 end condition	Active cell		1, 2, 3	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2, 3	Cell1	
Final condition	Active cell		1, 2, 3	Cell1	
	Neighbour cells		1, 2, 3	Cell2	
RF Channel Number			1, 2, 3	1	
Time offset between cells			1, 2, 3	3 μ s	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2, 3	SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3	Not configured	
T1		s	1, 2, 3	240	
T2		s	1, 2, 3	240	

Table A.15.1.4.2-3: Cell specific test parameters for FR2-2 intra-frequency NR cell re-selection test case in AWGN for UE fulfilling not-at-cell edge criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2, 3	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		SR.3.1 TDD	
		2	SR.3.1 TDD		SR.3.1 TDD	
		3	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
		2	CR.3.1 TDD		CR.3.1 TDD	
		3	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
		2	CCR.3.1 TDD		CCR.3.1 TDD	
		3	CCR.3.1 TDD		CCR.3.1 TDD	
SSB configuration		1	[SSB.x FR2-2]		[SSB.x FR2-2]	
		2	[SSB.x FR2-2]		[SSB.x FR2-2]	
		3	[SSB.x FR2-2]		[SSB.x FR2-2]	
OCNG Pattern		1, 2, 3	OP.4		OP.4	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-134		-134	
		3	-131		-131	
Pcompensation	dB	1, 2, 3	0		0	
Qhyst _s	dB	1, 2, 3	0		0	

Qoffset _{s, n}	dB	1, 2, 3	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
AoA setup		1, 2, 3	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption ^{Note 4}		1, 2, 3	Rough		Rough	
$\hat{E}_s / I_{\text{off}}$	dB	1, 2, 3	-3	1.5	1.5	-3
N_{oc} ^{Note2}	dBm/SCS	1	-93			
		2	-93			
		3	-90			
N_{oc} ^{Note2}	dBm/15 kHz	1, 2, 3	-102			
$\hat{E}_s / N_{\text{oc}}$	dB	1, 2, 3	-3	1.5	1.5	-3
SS-RSRP ^{Note3}	dBm/SCS	1	-96	-91.5	-91.5	-96
		2	-96	-91.5	-91.5	-96
		3	-93	-88.5	-88.5	-93
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-62.25	-60.19	-60.19	-62.25
	dBm/380.16 MHz	2	-62.25	-60.19	-60.19	-62.25
	dBm/380.16 MHz	3	-62.27	-60.21	-60.21	-62.27
Treselection	s	1, 2, 3	0	0	0	0
S _{SearchThresholdP}		1, 2, 3	35	35	35	35
S _{IntrasearchP}	dB	1, 2, 3	50		50	
Propagation Condition		1, 2, 3	AWGN			
Note 1: OCNB shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.15.1.4.3 Test Requirements

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected cell shall be less than 232 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detected cell can be expressed as: $T_{\text{evaluate, NR_Intra}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{evaluate, NR_Intra}}$ See Table 4.2.2.9.3-1 in clause 4.2.2.9,

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 231.68 s, allow 232 s for the cell re-selection delay to an already detected cell for UE fulfilling not-at-cell edge criterion in the test case.

A.15.1.5 Cell reselection to FR2-2 inter-frequency NR case for UE fulfilling low mobility relaxed measurement criterion

A.15.1.5.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for UE fulfilling low mobility criterion specified in clause 4.2.2.10.2.

A.15.1.5.2 Test Parameters

The test scenario comprises of 2 cells (Cell 1 and Cell 2) on 2 different NR carriers respectively as given in tables A.15.1.5.2-1, A.15.1.5.2-2 and A.15.1.5.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2. Cell 2 is of higher priority than Cell 1. The UE is configured with *lowMobilityEvaluation* criterion [2].

Table A.15.1.5.2-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.15.1.5.2-2: General test parameters for FR2-2 inter frequency NR cell re-selection test case for UE fulfilling low mobility criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell2 and fulfils low mobility (<i>lowMobilityEvaluation</i> [2]) criterion.
	Neighbour cell		1, 2, 3	Cell1	
T1 final condition	Active cell		1, 2, 3	Cell1	The UE reselects to low priority cell1 during T1
	Neighbour cell		1, 2, 3	Cell2	
T2 final condition	Active cell		1, 2, 3	Cell2	The UE reselects to high priority cell2 during T2
	Neighbour cell			Cell1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1, 2, 3	3 μ s	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	[SSB.x FR2-2]	
			2	[SSB.x FR2-2]	
			3	[SSB.x FR2-2]	
SMTC configuration			1, 2, 3	SMTC pattern 1	

DRX cycle length	s	1, 2, 3	0.64	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	240	T1 needs to be long enough to allow cell re-selection to already known cell1
T2	s	1, 2, 3	240	T2 needs to be long enough to allow cell re-selection to already known cell2

Table A.15.1.5.2-3: Cell specific test parameters for FR2-2 inter frequency NR cell re-selection test case in AWGN for UE fulfilling low mobility criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2, 3	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1, 2, 3	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET parameters		1, 2, 3	CR.3.1 TDD		CR.3.1 TDD	
RMSI CORESET RMC configuration		1, 2, 3	CCR.3.1 TDD		CCR.3.1 TDD	
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-137		-137	
		3				
Pcompensation	dB	1, 2, 3	0		0	
Qhyst _s	dB	1, 2, 3	0		0	
Qoffset _{s, n}	dB	1, 2, 3	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
AoA setup		1, 2, 3	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption ^{Note 4}		1, 2, 3	Rough		Rough	
$\hat{E}_s / I_{oc}$	dB	1, 2, 3	10.5	8	-10.5	-8.5
N_{oc} ^{Note2}	dBm/SCS	1	-93		-93	
		2	-93		-93	
		3	-90		-90	
N_{oc} ^{Note2}	dBm/15 kHz	1, 2, 3	-102		-102	
$\hat{E}_s / N_{oc}$	dB	1, 2, 3	10.5	8	-10.5	8.5
SS-RSRP ^{Note3}	dBm/SCS	1	-82.5	-85	-103.5	-84.5
		2	-82.5	-85	-103.5	-84.5
		3	-79.5	-82	-100.5	-81.5
I _o	dBm/95.04 MHz	1	-53.14	-55.37	-55.37	-53.14
	dBm/380.16 MHz	2	-53.14	-55.37	-55.37	-53.14
	dBm/380.16 MHz	3	-53.17	-55.39	-55.39	-53.16
TreselectionNR	s	1, 2, 3	0		0	
SnonintrasearchP	dB	1, 2, 3	50		Not sent	

S _{SearchDeltaP}	dB	1, 2, 3	6	6
T _{SearchDeltaP}	s	1, 2, 3	5	5
Thresh _{x, highP}	dB	1, 2, 3	48	48
Thresh _{serving, lowP}	dB	1, 2, 3	44	44
Thresh _{x, lowP}	dB	1, 2, 3	50	50
Propagation Condition		1, 2, 3	AWGN	AWGN
Note 1: OCNB shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.15.1.5.3 Test Requirements

The cell reselection delay to an already detected low priority cell (Cell 1) for UE fulfilling low mobility criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected low priority cell, Cell 1, shall be less than 232 s.

The cell reselection delay to an already detected high priority cell (Cell 2) for UE fulfilling low mobility criterion is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected high priority cell, Cell 2, shall be less than 232 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE 1: The cell re-selection delay to an already detected low priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$

NOTE 2: The cell re-selection delay to an already detected higher priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$

Where:

$T_{\text{evaluate, NR_inter}}$ See Table 4.2.2.10.2-1 in clause 4.2.2.10.2

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 231.68 s, allow 232 s for the cell re-selection delay to an already detected low priority cell for UE fulfilling low mobility criterion in the test case.

This gives a total of 231.68 s, allow 232 s for the cell re-selection delay to an already detected high priority cell for UE fulfilling low mobility criterion in the test case.

A.15.1.6 Cell reselection to FR2-2 inter-frequency NR case for UE fulfilling not-at-cell edge relaxed measurement criterion

A.15.1.6.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for UE fulfilling not-at-cell edge criterion specified in clause 4.2.2.10.3.

A.15.1.6.2 Test Parameters

The test scenario comprises of 2 cells (Cell 1 and Cell 2) on 2 different NR carriers respectively as given in tables A.15.1.6.2-1, A.15.1.6.2-2 and A.15.1.6.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2. Cell 2 is of higher priority than Cell 1. The UE is configured with *cellEdgeEvaluation* criterion [2].

Table A.15.1.6.2-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.15.1.6.2-2: General test parameters for FR2-2 inter frequency NR cell re-selection test case for UE fulfilling not-at-cell edge criterion

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3	Cell2	The UE camps on cell2 and fulfils not-at-cell edge (<i>cellEdgeEvaluation</i> [2]) criterion.
	Neighbour cell		1, 2, 3	Cell1	
T1 final condition	Active cell		1, 2, 3	Cell1	The UE reselects to low priority cell1 during T1
	Neighbour cell		1, 2, 3	Cell2	
T2 final condition	Active cell		1, 2, 3	Cell2	The UE reselects to high priority cell2 during T2
	Neighbour cell		1, 2, 3	Cell1	
RF Channel Number			1, 2, 3	1, 2	
Time offset between cells			1, 2, 3	3 μ s	Synchronous cells
Access Barring Information		-	1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1	[SSB.x FR2-2]	
			2	[SSB.x FR2-2]	
			3	[SSB.x FR2-2]	
SMTC configuration			1, 2, 3	SMTC pattern 1	
DRX cycle length		s	1, 2, 3	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2

rangeToBestCell		1, 2, 3	Not configured	
T1	s	1, 2, 3	240	T1 needs to be long enough to allow cell re-selection to already known cell.
T2	s	1, 2, 3	240	T2 needs to be long enough to allow cell re-selection to already known cell.

Table A.15.1.6.2-3: Cell specific test parameters for FR2-2 inter frequency NR cell re-selection test case in AWGN for UE fulfilling not-at-cell edge criterion

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2, 3	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1, 2, 3	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET parameters		1, 2, 3	CR.3.1 TDD		CR.3.1 TDD	
RMSI CORESET RMC configuration		1, 2, 3	CCR.3.1 TDD		CCR.3.1 TDD	
OCNG Pattern		1, 2, 3	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-134		-134	
		3	-131		-131	
Pcompensation	dB	1, 2, 3	0		0	
Qhysts	dB	1, 2, 3	0		0	
Qoffsets,n	dB	1, 2, 3	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3	SS-RSRP		SS-RSRP	
AoA setup		1, 2, 3	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption ^{Note 4}		1, 2, 3	Rough		Rough	
$\hat{E}_s / I_{ot}$	dB	1, 2, 3	10.5	8	-10.5	8.5
N_{oc} ^{Note2}	dBm/SCS	1	-93		-93	
		2	-93		-93	
		3	-90		-90	
N_{oc} ^{Note2}	dBm/15 kHz	1, 2, 3	-102		-102	
$\hat{E}_s / N_{oc}$	dB	1, 2, 3	10.5	8	-10.5	8.5
SS-RSRP ^{Note3}	dBm/SCS	1	-82.5	-85	-103.5	-84.5
		2	-82.5	-85	-103.5	-84.5
		3	-79.5	-82	-100.5	-81.5
Io	dBm/95.04 MHz	1	-53.14	-55.37	-55.37	-53.14
	dBm/380.16 MHz	2	-53.14	-55.37	-55.37	-53.14
	dBm/380.16 MHz	3	-53.16	-55.38	-55.38	-53.16
S _{SearchThresholdP}		1, 2, 3	35	35	29	29
T _{reselectionNR}	s	1, 2, 3	0		0	
S _{nonintrasearchP}	dB	1, 2, 3	50		Not sent	
Thresh _{x, highP}	dB	1, 2, 3	48		48	
Thresh _{serving, lowP}	dB	1, 2, 3	44		44	
Thresh _{x, lowP}	dB	1, 2, 3	50		50	

Propagation Condition		1, 2, 3	AWGN	AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			

A.15.1.6.3 Test Requirements

The cell reselection delay to an already detected low priority cell (Cell 1) for UE fulfilling not-at-cell edge criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected low priority cell, Cell 1, shall be less than 232 s.

The cell reselection delay to an already detected high priority cell (Cell 2) for UE fulfilling not-at-cell edge criterion is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected high priority cell, Cell 2, shall be less than 232 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE 1: The cell re-selection delay to an already detected low priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$

NOTE 2: The cell re-selection delay to an already detected higher priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$

Where:

$T_{\text{evaluate, NR_inter}}$ See Table 4.2.2.10.3-1 in clause 4.2.2.10.3

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 231.68 s, allow 232 s for the cell re-selection delay to an already detected low priority cell for UE fulfilling not-at-cell edge criterion in the test case.

This gives a total of 231.68 s, allow 232 s for the cell re-selection delay to an already detected high priority cell for UE fulfilling not-at-cell edge criterion in the test case.

A.15.2 Signaling characteristics

A.15.2.1 SCell Activation and Deactivation Delay

A.15.2.1.1 SCell Activation and deactivation for SCell in FR2-2 intra-band in non-DRX

A.15.2.1.1.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.6.5.3.1.1 except the PCell and SCell are in FR2-2 intra-band.

The supported test configurations are shown in table A.15.2.1.1.1-1 below. The general test parameters are the same as defined in Table A.6.5.3.1.1-2 except those described in Tables A.14.X.3.1.1-2, and cell specific test parameters are described in Tables A.15.2.1.1.1-3. OTA related test parameters are shown in table A.15.2.1.1.1-4 below.

Table A.15.2.1.1.1-1: Supported test configurations for FR2-2 SCell activation case

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	NR 480 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
3	NR 960 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.15.2.1.1.1-2: General test parameters for FR2-2 SCell activation case

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels are used for this test, cell 1 and cell2 use RF channel 1 and 2, respectively.

Table A.15.2.1.1.1-3: Cell specific test parameters for FR2-2 SCell activation case

Parameter ^{Note 5}		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
SSB ARFCN			freq1			freq2		
Duplex mode	Config 1, 2, 3		TDD					
TDD configuration	Config 1, 2, 3		TDDConf.3.1					
Downlink initial BWP Configuration	Config 1, 2, 3		DLBWP.0.1					
Downlink dedicated BWP Configuration	Config 1, 2, 3		DLBWP.1.1					
Uplink initial BWP configuration	Config 1, 2, 3		ULBWP.0.1					
Uplink dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1					
TRS configuration	Config 1, 2, 3		TRS.2.1 TDD					
TCI state	Config 1, 2, 3		TCI.State.0					
BW _{channel}	Config 1, 2, 3	MHz	100: N _{RB,c} = 66					
Data RBs allocated	Config 1, 2, 3		66		66		66	
PDSCH Reference measurement channel	Config 1, 2, 3		SR.3.1 TDD			-		
RMSI CORESET Parameters	Config 1, 2, 3		CR.3.1 TDD			-		
Dedicated CORESET Parameters	Config 1, 2, 3		CCR.3.1 TDD			-		
OCNG Patterns	Config 1, 2, 3		OP.1					
SSB Configuration	Config 1, 2, 3		SSB.1 FR2-2					
SMTC Configuration	Config 1, 2, 3		SMTC.1					

CSI-RS configuration for CSI reporting	Config 1, 2, 3		CSI-RS.3.1 TDD	
reportConfigType	Config 1, 2, 3		periodic	N/A
reportQuantity	Config 1, 2, 3		cri-RI-PMI-CQI	N/A
CSI reporting periodicity	Config 1, 2, 3	slot	40	N/A
CSI reporting offset	Config 1, 2, 3	slot	4	N/A
EPRE ratio of PSS to SSS	Config 1, 2, 3	dB	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}				
Propagation conditions	Config 1, 2, 3		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Void				
Note 3: Void				
Note 4: Void				
Note 5: Void				

Table A.15.2.1.1.1-4: OTA related test parameters for FR2-2 SCell activation case

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Angle of arrival configuration	Config 1, 2, 3		Setup 1 according to table A.3.15.1			Setup 1 according to table A.3.15.1		
Assumption for UE beams ^{Note 4}	Config 1, 2, 3		Rough			Rough		
N_{oc} ^{Note1}		$\text{dBm}/15\text{kHz}$ ^{Note3}	-104.7			-104.7		
N_{oc} ^{Note1}	Config 1	dBm/SCS ^{Note4}	-95.7			-95.7		
	Config 2		-95.7			-95.7		
	Config 3		-92.7			-92.7		
$\hat{E}_s/N_{oc}$		dB	7			7		
SSB_RP ^{Note2}	Config 1	dBm/SCS ^{Note4}	-88.7			-88.7		
	Config 2		-88.7			-88.7		
	Config 3		-85.7			-85.7		
$\hat{E}_s/I_{ot}$		dB	7			7		
I_o ^{Note2}	Config 1	$\text{dBm}/95.04\text{ MHz}$ ^{Note3}	-58.92			-58.92		
	Config 2	$\text{dBm}/380.16\text{ MHz}$	-58.92			-58.92		
	Config 3	$\text{dBm}/380.16\text{ MHz}$	-58.93			-58.93		

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	Es/lot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 4:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.15.2.1.1.2 Test Requirements

The test requirements defined in clause A.6.5.3.1.2 shall apply to this test case, except $T_{\text{activation_time}}$ will be replaced with the value $T_{\text{FirstSSB}} + 5\text{ms}$ as defined in clause 8.3.

A.15.2.1.2 SCell Activation and deactivation for FR1+FR2-2 inter-band with target SCell in FR2-2

A.15.2.1.2.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.15.2.1.1.1 except the PCell is in FR1 and SCell is in FR2-2.

The supported test configurations are defined in Table A.15.2.1.2.1-1. The general test parameters are the same as defined in Table A.15.2.1.1.1-2 except that the length of T2 is 2s. And cell specific test parameters are described in Tables A.15.2.1.2.1-2. OTA related test parameters are defined in Table A.15.2.1.2.1-3.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on NR. During T1 the SCell is powered off and UE is not aware of SCell.

A MAC message for activation of SCell is sent by the test equipment 100ms after the RRC message, in a slot # denoted m. The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2.

During T2, the test equipment monitors the L1-RSRP measurement reporting for the SCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m + T_{\text{L1-RSRP}}$. In the next DL slot after slot $m + T_{\text{L1-RSRP}}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PCell during activation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell1 deactivation command is sent until CSI reporting for SCell1 is discontinued.

Table A.15.2.1.2.1-1: Supported test configurations for FR2-2 SCell activation case

Configuration	Description
1	PCell: 15 kHz SSB SCS, 10MHz bandwidth, FDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	PCell: 15 kHz SSB SCS, 10MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
3	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target SCell: 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode

4	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target SCell: 480 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
5	PCell: 30kHz SSB SCS, 40MHz bandwidth, TDD duplex mode Target SCell: 960 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
Note: The UE is only required to pass in one of the supported test configurations	

Table A.15.2.1.2.1-2: Cell specific test parameters for FR2-2 SCell activation case

Parameter ^{Note 5}		Unit	Cell 1			Cell 2		
			T1	T2			T1	T2
SSB ARFCN			Freq1			Freq2		
Duplex mode	Config 1		FDD			TDD		
	Config 2,3,4,5		TDD					
TDD configuration	Config 1		Not Applicable			TDDConf.3.1		
	Config 2		TDDConf.1.1					
	Config 3,4,5		TDDConf.2.1					
Downlink initial BWP Configuration	Config 1,2,3,4,5		DLBWP.0.1					
Downlink dedicated BWP Configuration	Config 1,2,3,4,5		DLBWP.1.1					
Uplink initial BWP configuration	Config 1,2,3,4,5		ULBWP.0.1					
Uplink dedicated BWP configuration	Config 1,2,3,4,5		ULBWP.1.1					
TRS configuration	Config 1,2,3,4,5		N/A			TRS.2.1 TDD		
TCI state	Config 1,2,3,4,5		TCI.State.0					
BW _{channel}	Config 1,2	MHz	10: N _{RB,c} = 52			100: N _{RB,c} = 66		
	Config 3,4,5		40: N _{RB,c} = 106					
Data RBs allocated	Config 1,2		52	66	52	66	52	66
	Config 3,4,5		106		106		106	
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			-		
	Config 2		SR.1.1 TDD					
	Config 3,4,5		SR.2.1 TDD					
RMSI CORESET Parameters	Config 1		CR.1.1 FDD			-		
	Config 2		CR.1.1 TDD					
	Config 3,4,5		CR.2.1 TDD					
Dedicated CORESET Parameters	Config 1		CCR.1.1 FDD			-		
	Config 2		CCR.1.1 TDD					
	Config 3,4,5		CCR.2.1 TDD					
OCNG Patterns			OP.1					
SSB configuration	Config 1,2		SSB.1 FR1			[SSB.x FR2-2]		
	Config 3		SSB.2 FR1			[SSB.x FR2-2]		
	Config 4					[SSB.x FR2-2]		
	Config 5					[SSB.x FR2-2]		
CSI-RS configuration for CSI reporting	Config 1,2,3,4,5		N/A			N/A	CSI-RS.3.1 TDD Note 6	CSI-RS.3.1 TDD
reportConfigType for CSI reporting			periodic			N/A		
reportConfigType for L1-RSRP			periodic			N/A		
reportQuantity for CSI reporting			cri-RI-PMI-CQI			N/A		
reportQuantity for L1-RSRP			ssb-Index-RSRP			N/A		
CSI reporting periodicity	Config 1,2	slot	5			N/A		
	Config 3,4,5		10					
		slot	5			N/A		

L1-RSRP reporting periodicity ^{Note 7}	Config 3,4,5		10	
CSI reporting offset	Config 1,2	slot	2	N/A
	Config 3,4,5		4	
L1-RSRP reporting offset	Config 1,2	slot	2	N/A
	Config 3,4,5		4	
SMTc configuration			SMTc.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG_DMRS to SSS ^{Note 1}				
EPRE ratio of OCNG to OCNG_DMRS ^{Note 1}				
Propagation conditions			N/A Link only, see clause A.3.7A	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Void				
Note 3: Void				
Note 4: Void				
Note 5: All parameters apply for configuration 1, 2 and 3				
Note 6: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot m+T _{L1-RSRP} during T2.				
Note 7: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.				

Table A.15.2.1.2.1-3: OTA related test parameters for FR1 PCell activation case with FR2-2 SCell

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Angle of arrival configuration			N/A			According to clause A.3.15.1		
Assumption for UE beams ^{Note 7}			N/A			Rough		
N_{oc} ^{Note 1}	Config 1,2,3	dBm/15kHz	Link only, see clause A.3.7A			-104.7		
N_{oc} ^{Note 1}	Config 1,2,3	dBm/SCS				-95.7		
	Config 4					-95.7		
	Config 5					-92.7		
$\hat{E}_s/N_{oc}$	Config 1,2,3,4,5	dB				$-\infty$	7	7
$\hat{E}_s/N_{oc}$	Config 1,2,3,4,5	dB				$-\infty$	7	7
SSB_RP ^{Note 2, Note 4}	Config 1,2,3	dBm/SCS				$-\infty$	-88.7	-88.7
	Config 4					$-\infty$	-88.7	-88.7
	Config 5					$-\infty$	-85.7	-85.7
I_0 ^{Note 2, Note 4}	Config 1,2,3	dBm/95.04 MHz				-66.71	-58.92	-58.92
		dBm/380.16 MHz				-66.71	-58.92	-58.92

		dBm/380.16 MHz	-66.72	-58.93	-58.93
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2:	Es/lot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	Void				
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone				
Note 5:	Void				
Note 6:	Void				
Note 7:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				

A.15.2.1.2.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k). UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PCell in the slot.

During T2 the UE shall start sending valid L1-RSRP report for the SCell in the configured slots for CSI reporting after slot (m+ $T_{L1-RSRP}$), where $T_{L1-RSRP}$ is no larger than

$$3\text{ms} + T_{\text{FirstSSB_MAX}} + 23 \cdot T_{\text{SMTc_MAX}} + 12 \cdot T_{\text{rs}} + T_{L1-RSRP, \text{measure}} + T_{L1-RSRP, \text{report}}$$

as defined in clause 8.3.2. For this test case, $T_{\text{FirstSSB_MAX}}=T_{\text{SMTc_MAX}}=T_{\text{rs}}=20\text{ms}$; $T_{L1-RSRP, \text{measure}}=240\text{ms}$ and $T_{L1-RSRP, \text{report}}=5\text{ms}$, which allows $T_{L1-RSRP}$ [980] ms.

During T2 the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}}{NR \text{ slot length}}$, where

- T_{HARQ} is defined in Table A.5.5.3.1.1-2

- $T_{\text{activation_time}} = 3\text{ms} + T_{\text{FirstSSB_MAX}} + 23 \cdot T_{\text{SMTc_MAX}} + 12 \cdot T_{\text{rs}} + T_{L1-RSRP, \text{measure}} + T_{L1-RSRP, \text{report}} + \max \{ (T_{\text{HARQ}} + T_{\text{uncertainty_MAC}} + 5\text{ms} + T_{\text{FineTiming}}), (T_{\text{uncertainty_RRC}} + T_{\text{RRC_delay}}) \}$, which allows [1100] ms

- $T_{\text{CSI_Reporting}} = 10\text{ms}$

- NR slot length is 0.125ms for this test case.

During T3 the UE shall stop sending CSI reports for both SCells no later than slot $n + \frac{T_{\text{HARQ}} + 3\text{ms}}{NR \text{ slot length}}$, as defined in clause 8.3.

During T2 interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{\text{HARQ}}}{NR \text{ slot length}}$ to $m + 1 + \frac{T_{\text{HARQ}} + 3\text{ms} + T_X}{NR \text{ slot length}}$, as defined in clause 8.3, where $T_X=20\text{ms}$.

During T3 the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{\text{HARQ}}}{NR \text{ slot length}}$ to $n + 1 + \frac{T_{\text{HARQ}} + 3\text{ms}}{NR \text{ slot length}}$, as defined in clause 8.3.

The interruption of PCell due to activation of SCell shall not be more than the values specified for SA in Clause 8.2.2.2.7.

A.15.2.1.3 SCell Activation and deactivation for SCell in FR2-2 inter-band in non-DRX

A.15.2.1.3.1 Test Purpose and Environment

The purpose of this test case is the same as for the test defined in clause A.15.2.1.1.1 except the PCell and SCell are in FR2-2 inter-band.

The supported test configurations are shown in table A.15.2.1.3.1-1 below. The general test parameters are described in Tables A.15.2.1.3.1-2, and cell specific test parameters are described in Tables A.15.2.1.3.1-3. OTA related test parameters are shown in table A.15.2.1.3.1-4 below.

At the beginning of T1 the UE receives an RRC message by which the SCell (Cell 2) becomes configured on NR. During T1 the SCell is powered off and UE is not aware of SCell. A MAC message for activation of SCell is sent by the test equipment 100ms after the RRC message, in a slot # denoted m.

The point in time at which the MAC message for activation of SCell is received at the UE antenna connector defines the start of time period T2. Immediately at beginning of T2 the transmission power of Cell 2 is increased to same level as for cell 2. During T2, the test equipment monitors the L1-RSRP measurement reporting for the SCell. The time when test equipment receives a valid L1-RSRP report is denoted as slot $m+T_{L1-RSRP}$. In the next DL slot after slot $m+T_{L1-RSRP}$, the test equipment sends a MAC message for the activation of the TCI state of the RMC CORESET of the SCell. In the same slot, the test equipment also sends an RRC message to configure the CSI-RS resources for SCell.

Time period T3 starts when a MAC message for deactivation of the SCell, sent from the test equipment to the UE in a slot # denoted n, is received at the UE antenna connector.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell and PSCell during activation of SCell, respectively.

The test equipment verifies the activation time by counting the slots from the time when the SCell activation command is sent until a CSI report with other than CQI index 0 is received.

The test equipment verifies the deactivation time by counting the slots from the time when the SCell1 deactivation command is sent until CSI reporting for SCell1 is discontinued.

Table A.15.2.1.3.1-1: Supported test configurations for FR2-2 SCell activation in FR2-2 inter-band

Configuration	Description
1	NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode
2	NR 480 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
3	NR 960 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.15.2.1.3.1-2: General test parameters for FR2-2 SCell activation in FR2-2 inter-band

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels are used for this test. RF channel number 1 is in band 1 and RF channel number 2 is in band 2, where bands 1 and 2 are inter-band CA operating bands in FR2-2 as specified in Table 5.2A.2-1 in TS38.101-2.
Active PCell	Config 1,2,3	Cell 1	Primary cell on NR RF channel number 1.
Configured deactivated SCell	Config 1,2,3	Cell 2	Configured deactivated secondary cell on NR RF channel number 2.
CP length	Config 1,2,3	Normal	
DRX	Config 1,2,3	OFF	Continuous monitoring of primary cell

CQI/PMI periodicity and offset configuration index	Config 1,2,3		0	CQI reporting for SCell every second subframe
Cell-individual offset for cells on NR channel number	Config 1,2,3	dB	0	Individual offset for cells on primary component carrier.
SCell measurement cycle (measCycleSCell)	Config 1,2,3	ms	160	
Cell2 timing offset to cell1	Config 1,2,3	μ s	≤ 8	A random value from 0 μ s to 8 μ s
T1	Config 1,2,3	s	7	During this time the PCell shall be known and the SCell configured and detected.
T2	Config 1,2,3	s	2	During this time the UE shall activate the SCell.
T3	Config 1,2,3	s	1	During this time the UE shall deactivate the SCell.
T _{HARQ}	Config 1,2,3	ms	$k_1 \times \text{NR slot length}$	k_1 is a number of slots and is indicated by the PDSCH-to-HARQ-timing-indicator field in the DCI format, if present, or provided by <i>dl-DataToUL-ACK</i> , the value of k should be the minimum value defined in TS 38.213 [3] depends on UE's capability
T _{CSI_Reporting}	Config 1,2,3	ms	2	the delay uncertainty in acquiring the first available CSI reporting resources as specified in TS 38.331 [2]

Table A.15.2.1.3.1-3: Cell specific test parameters for FR2-2 SCell activation in FR2-2 inter-band

Parameter ^{Note 5}		Unit	T1		T2		T3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1,2,3		TDD		TDD		TDD	
TDD configuration	Config 1,2,3		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
Downlink initial BWP Configuration	Config 1,2,3		DLBWP.0.1		DLBWP.0.1		DLBWP.0.1	
Downlink dedicated BWP Configuration	Config 1,2,3		DLBWP.1.1		DLBWP.1.1		DLBWP.1.1	
Uplink initial BWP configuration	Config 1,2,3		ULBWP.0.1		ULBWP.0.1		ULBWP.0.1	
Uplink dedicated BWP configuration	Config 1,2,3		ULBWP.1.1		ULBWP.1.1		ULBWP.1.1	
TRS configuration	Config 1,2,3		TRS.2.1 TDD		TRS.2.1 TDD		TRS.2.1 TDD	
TCI state	Config 1,2,3		TCI.State.0		TCI.State.0		TCI.State.0	
BW _{channel}	Config 1,2,3	MHz	100: N _{RB,C} = 66		100: N _{RB,C} = 66		100: N _{RB,C} = 66	
PDSCH Reference measurement channel	Config 1,2,3		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Parameters	Config 1,2,3		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Parameters	Config 1,2,3		CCR.3.1 TDD	-	CCR.3.1 TDD	-	CCR.3.1 TDD	-
CSI-RS configuration	Config 1,2,3		NA	NA	NA	CSI-RS.3.1 TDD Note 2	NA	CSI-RS.3.1 TDD
CSI reporting periodicity ^{Note 3}	Config 1,2,3		NA	5	NA	5	NA	5
OCNG Patterns	Config 1,2,3		OP.1					
SSB Configuration	Config 1,2,3		[SSB.x FR2-2]					
SMTc Configuration	Config 1,2,3		SMTc.1					
EPRE ratio of PSS to SSS	Config 1,2,3	dB	0					

EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation conditions	Config 1,2,3		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: CSI-RS for CSI measurement is (re)configured in the next DL slot after slot $m+T_{L1-RSRP}$ during T2.			
Note 3: L1-RSRP measurement and reporting are configured to the the UE prior to the start of time period T1.			

Table A.15.2.1.3.1-4: OTA related test parameters for FR2-2 SCell activation in FR2-2 inter-band

Parameter ^{Note 6}		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
AoA setup	Config 1,2,3		Setup 3 as specified in clause A.3.15					
			AoA1			AoA2		
Assumption for UE beams ^{Note 7}	Config 1,2,3		Rough			Rough		
N_{oc} ^{Note1}	Config 1,2,3	dBm/15kHz ^{Note4}	-92.1			-92.1		
N_{oc} ^{Note1}	Config 1	dBm/SCS ^{Note3}	-83.1			-83.1		
	Config 2		-83.1			-83.1		
	Config 3		-80.1			-80.1		
$\hat{E}_s/N_{oc}$	Config 1,2,3	dB	0			0		
SS-RSRP ^{Note2}	Config 1	dBm/SCS ^{Note4}	-83.1			-83.1		
	Config 2		-83.1			-83.1		
	Config 3		-80.1			-80.1		
$\hat{E}_s/I_{ot}$	Config 1,2,3	dB	0			0		
I_{ot} ^{Note2}	Config 1	dBm/95.04 MHz ^{Note4}	-51.10			-51.10		
	Config 2	dBm/380.16 MHz	-51.10			-51.10		
	Config 3	dBm/380.16 MHz	-51.12			-51.12		

Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 2:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone
Note 6:	All parameters apply for configuration 1
Note 7:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.15.2.1.3.2 Test Requirements

During T2 the UE shall start sending CSI report for the SCell in the configured slots for CSI reporting after at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k). UE shall send the first CSI report for SCell after receiving at least one CSI-RS transmission occasion for channel measurement and reporting after slot (m+k), or in the next available uplink resource for CSI reporting if the slot was subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PCell in the slot.

During T2, the UE shall start sending valid L1-RSRP report for the SCell in the configured slots for CSI reporting after slot (m+ $T_{L1-RSRP}$), where $T_{L1-RSRP}$ is no larger than $3ms + T_{FirstSSB_MAX} + 23 \cdot T_{SMTc_MAX} + 12 \cdot T_{rs} + T_{L1-RSRP, measure} + T_{L1-RSRP, report}$ as defined in clause 8.3.2. For this test case, $T_{FirstSSB_MAX} = T_{SMTc_MAX} = T_{rs} = 20ms$; $T_{L1-RSRP, measure} = 480ms$ and $T_{L1-RSRP, report} = 5ms$, which allows $T_{L1-RSRP} = 1480ms$.

During T2, the UE shall start sending CSI reports for the SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{NR\ slot\ length}$, where

- T_{HARQ} is defined in Table A.14.X.3.3.1-2
- $T_{activation_time} = 3ms + T_{FirstSSB_MAX} + 23 \cdot T_{SMTc_MAX} + 12 \cdot T_{rs} + T_{L1-RSRP, measure} + T_{L1-RSRP, report} + \max\{(T_{HARQ} + T_{uncertainty_MAC} + 5ms + T_{FineTiming}), (T_{uncertainty_RRC} + T_{RRC_delay})\}$, which allows 1510ms
- $T_{CSI_Reporting} = 10ms$
- NR slot length is 0.125ms for this test case.

During T2, the interruption of PCell during SCell activation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $m + 1 + \frac{T_{HARQ} + 3ms + T_X}{NR\ slot\ length}$, where $T_X = 20ms$.

During T3, the UE shall stop sending CSI reports for SCell no later than slot $n + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During T3, the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$ as defined in clause 8.3.

A.15.2.1.4 Direct SCell activation at SCell addition of known SCell in FR2-2

A.15.2.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the delay and interruption for direct SCell activation delay at SCell addition are within the requirements stated in clause 8.3.4.

The supported test configurations are shown in Table A.15.2.1.4.1-1 below. The general test parameters are given in Table A.15.2.1.4.1-2 and cell-specific test parameters in Table A.15.2.1.4.1-3. OTA related test parameters are shown in Table A.15.2.1.4.1-4.

The test consists of three successive time periods, with duration of T1, T2 and T3, respectively. There are two FR2-2 carriers and two NR cells. Before the test starts the UE is connected to Cell 1 (PCell) on carrier #1, but is not aware of Cell 2 on NR carrier #2. Cell 1 and Cell 2 have constant signal levels throughout the test. The UE is monitoring the PCell. The UE shall be continuously scheduled in the PCell throughout the whole test.

At the beginning of T1 the UE receives an RRC message by which the Cell 2 is monitored by the UE. During T1, Cell 2 should be detected and measured by the UE such that it meets the condition for known cell defined in clause 8.3.4 for direct SCell activation.

Time period T2 starts when the *RRCReconfiguration* message for the configuration and activation of Cell 2 (the SCell), which is sent from the test equipment, is received at the UE antenna connector in a slot # denoted m. The test equipment shall set the parameter *sCellState* to *activated* for the SCell, which causes Cell 2 to become configured and activated.

Time period T3 starts at $(m + N_{\text{direct}})$, at which point UE shall be reporting a valid CQI for both PCell and SCell.

The test equipment verifies that potential interruption is carried out in the correct time span by monitoring ACK/NACK sent in PCell during the activation of SCell. The test equipment verifies the activation time by counting the slots from the time when the SCell activation message is sent until a CQI report with other than CQI index 0 is received.

Table A.15.2.1.4.1-1: Supported test configurations

Configuration	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 480 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
3	NR 960 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.15.2.1.4.1-2: General test parameters

Parameter	Unit	Value	Comment
RF Channel Number		1,2	Two NR radio channels (1,2) in FR2-2 are used for this test
Active PCell	Config 1, 2 ,3	Cell 1	Primary cell on NR RF channel number 1.
Configured and activated SCell	Config 1, 2 ,3	Cell 2	Configured and activated SCell on NR RF channel number 2.
CP length	Config 1, 2 ,3	Normal	
DRX	Config 1, 2 ,3	OFF	Continuous monitoring of primary cell
SCell measurement cycle (measCycleSCell)	Config 1, 2 ,3	ms	160
T1	Config 1, 2 ,3	s	7
T2	Config 1, 2 ,3	s	N_{direct}
T3	Config 1, 2 ,3	ms	100

T_{HARQ}	Config 1, 2, 3	ms	$k_1 \times \text{NR slot length}$	k_1 is a number of slots indicated by the PDSCH-to-HARQ feedback timing indicator field in a corresponding DCI format or provided by <i>dl-DataToUL-ACK</i> if the PDSCH-to-HARQ feedback timing field is not present in the DCI format, the value is defined in 38.213 [3]
k	Config 1, 2, 3	slot	$k_1 + 3 \cdot N_{\text{slot}}^{\text{subframe}, \mu} + 1$	As specified in clause 4.3 of TS 38.213 [3]

Table A.15.2.1.4.1-3: Cell specific test parameters

Parameter		Unit	Cell 1		Cell 2		
			T1	T2	T3	T1	T2
SSB ARFCN			freq1		freq2		
Duplex mode	Config 1, 2, 3		TDD				
TDD configuration	Config 1, 2, 3		TDDConf.3.1				
BW _{channel}	Config 1, 2, 3	MHz	100: N _{RB,c} = 66				
DL initial BWP configuration	Config 1, 2, 3		DLBWP.0.1				
DL dedicated BWP configuration	Config 1, 2, 3		DLBWP.1.1				
UL initial BWP configuration	Config 1, 2, 3		ULBWP.0.1				
UL dedicated BWP configuration	Config 1, 2, 3		ULBWP.1.1				
Timing offset to Cell 1		ms	Not Applicable		0		
PDSCH Reference measurement channel	Config 1, 2, 3		SR.3.1 TDD		SR.3.1 TDD		
RMSI CORESET Reference Channel	Config 1, 2, 3		CR.3.1 TDD		CR.3.1 TDD		
RMC CORESET Reference Channel	Config 1, 2, 3		CCR.3.1 TDD		CCR.3.1 TDD		
TRS configuration	Config 1, 2, 3		TRS.2.1 TDD		TRS.2.1 TDD		
CSI-RS configuration	Config 1, 2, 3		CSI-RS.3.1 TDD		CSI-RS.3.1 TDD		
CSI reporting periodicity	Config 1, 2, 3	ms	5		5		
OCNG Patterns			OP.1				
SMTC configuration			SMTC.1				
SSB configuration	Config 1, 2, 3		[SSB.x FR2-2]		[SSB.x FR2-2]		
EPRE ratio of PSS to SSS		dB	0				
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
Propagation condition		-	AWGN				

Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Table A.15.2.1.4.1-4: OTA related test parameters

Parameter ^{Note 6}		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Angle of arrival configuration	Config 1, 2, 3		Setup 1 according to A.3.15.1					
Assumption for UE beams ^{Note 7}	Config 1, 2, 3		Rough			Rough		
N_{oc} ^{Note1}	Config 1, 2, 3	dBm/15kHz ^{Note4}	-112			-112		
N_{oc} ^{Note1}	Config 1	dBm/SCS ^{Note3}	-102.97			-102.97		
	Config 2		-102.97			-102.97		
	Config 3		-99.97			-99.97		
$\hat{E}_s / N_{oc}$	Config 1, 2, 3	dB	14			14		
SS-RSRP ^{Note2}	Config 1	dBm/SCS ^{Note4}	-88.97			-88.97		
	Config 2		-88.97			-88.97		
	Config 3		-85.97			-85.97		
$\hat{E}_s / I_{ot}$	Config 1, 2, 3	dB	14			14		
I_o ^{Note2}	Config 1	dBm/95.04 MHz ^{Note4}	-59.81			-59.81		
	Config 2	dBm/380.16 MHz	-59.81			-59.81		
	Config 3	dBm/380.16 MHz	-59.83			-59.83		
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone Note 6: All parameters apply for configuration 1 Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation								

A.15.2.1.4.2 Test Requirements

During T2 the UE shall send the first CSI report for SCell in the first available uplink resource after slot (m+k). UE is allowed to postpone CSI report to next available UL resource if an available uplink resource is subject to interruption. Whether CSI report in a slot was interrupted is checked by monitoring ACK/NACK sent in PCell in the slot.

During T2 the UE shall start sending CSI reports for SCell with non-zero CQI index in the configured slots for CSI reporting no later than slot $m + \frac{N_{direct}}{NR \text{ slot length}}$, where

$$N_{direct} = T_{RRC_Process} + T_1 + T_{activation_time} + T_{CSI_Reporting} - 3ms,$$

- $T_{RRC_Process} = 16ms$, which is the RRC procedure delay defined for SCell addition in clause 12 of TS 38.331 [2],

- T_1 is the delay from slot $m + T_{RRC_Process}$ until the transmission of *RRCReconfigurationComplete* message,
- $T_{activation_time} = T_{FirstSSB} + 5ms = 25ms$,
- $T_{CSI_Reporting} = 10ms$

This gives a total of $N_{direct} = 16 + T_1 + 25 + 10 - 3 = (48 + T_1)$ ms, and NR slot length is 0.125ms.

During T3 the UE shall send CSI reports for SCell with non-zero CQI index and continue to send CSI reports for SCell with non-zero CQI index until the end of T3.

During T2 interruption of PCell during SCell activation shall not happen outside the window from slot $m+1$ to slot $m+1 + \frac{T_{RRC_Process} + T_1 + T_X}{NR\ slot\ length}$ as defined in clause 8.3.4, where $T_X = 20ms$.

The interruption of PCell due to activation of SCell shall not be more than the values specified for NR SA in clause 8.2.2.2.11.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During T2 if there are no uplink resources for reporting the valid CSI in a slot $m + \frac{N_{direct}}{NR\ slot\ length}$ as defined in clause 8.3.4 then the UE shall use the next available uplink resource for reporting the corresponding valid CSI.

A.15.2.1.5 Direct SCell activation at handover with known SCell in FR2-2

A.15.2.1.5.1 Test Purpose and Environment

This test is to verify the requirements specified in sub clause 8.3.5 for the FR2-2 handover with direct SCell activation.

The test scenario comprises of three FR2-2 cells, one source PCell (Cell 1), one target PCell (Cell 2) and one SCell (Cell 3). The test consists of three successive time periods, with time durations of T1, T2, and T3 respectively.

At the start of time duration T1, the UE is in connected mode with PCell (Cell 1). Both Cell 2 and Cell 3 are known to UE and UE is reporting CQI for all Cell 1.

Time period T2 starts when UE receives a handover command that initiate handover of UE to Cell2 and also activates Cell 3. This is done using an *RRCConnectionReconfiguration* message with parameter *sCellState* set to *activated* for the Cell 3. The message is sent from the test equipment to the UE and is received in a slot number n at the UE antenna connector. The UE shall accomplish the handover, addition and activation of the SCell no later than slot $(n + \frac{N_{direct}}{NR\ slot\ length})$.

Time period T3 starts at $(n + \frac{N_{direct}}{NR\ slot\ length})$, at which point UE shall be reporting a valid CSI for both Cell 2 and Cell 3 as given in tables A.15.2.1.5.1-1 and A.15.2.1.5.1-2.

Table A.15.2.1.5.1-1: Supported test configurations for FR2-2 handover with direct SCell activation case

Configuration	Description
1	SCell: NR 120 kHz SSB SCS, 100MHz bandwidth, TDD duplex mode Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	SCell: NR 480 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode Source cell: NR 480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode

	Target cell: NR 480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	SCell: NR 960 kHz SSB SCS, 400MHz bandwidth, TDD duplex mode Source cell: NR 960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode Target cell: NR 960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations

Table A.15.2.1.5.1-2: General test parameters for FR2-2 handover with direct SCell activation case

Parameter		Unit	Value	Comment
RF Channel Number	Config 1,2,3		1, 2, 3	Three NR radio channels are used for this test, Cell 1, Cell2 and Cell 3 use RF channel 1, 2 and 3 respectively.
A4-Offset	Config 1,2,3	dBm	-120	
Time offset between cells	Config 1,2,3		3 μ s	Synchronous cells
Initial conditions	Source cell	Config 1,2,3	Cell 1	Source Cell
	Target cell		Cell 2	Neighbour cell
	SCell		Cell 3	SCell is not added and activated
Final condition	Source cell	Config 1,2,3	Cell 2	Cell 2 is Source cell after handover
	Neighbour cell		Cell 1	Neighbour cell
	SCell		Cell 3	SCell is added and activated

Table A.15.2.1.5.1-3: Cell specific test parameters for FR2-2 SCell activation case

Parameter ^{Note 5}		Unit	T1			T2			T3		
			Cell 1	Cell 2	Cell 3	Cell 1	Cell 2	Cell 3	Cell 1	Cell 2	Cell 3
SSB ARFCN	Config 1,2,3		freq1	freq2	freq 3	freq1	freq2	freq 3	freq1	freq2	freq3
Duplex mode	Config 1,2,3		TDD			TDD			TDD		
TDD configuration	Config 1,2,3		TDDConf.3.1			TDDConf.3.1			TDDConf.3.1		
Downlink initial BWP Configuration	Config 1,2,3		DLBWP.0.1			DLBWP.0.1			DLBWP.0.1		
Downlink dedicated BWP Configuration	Config 1,2,3		DLBWP.1.1			DLBWP.1.1			DLBWP.1.1		
Uplink initial BWP configuration	Config 1,2,3		ULBWP.0.1			ULBWP.0.1			ULBWP.0.1		
Uplink dedicated BWP configuration	Config 1,2,3		ULBWP.1.1			ULBWP.1.1			ULBWP.1.1		
TRS configuration	Config 1,2,3		TRS.2.1 TDD			TRS.2.1 TDD			TRS.2.1 TDD		
TCI state	Config 1,2,3		TCI.State.0			TCI.State.0			TCI.State.0		
BW _{channel}	Config 1,2,3	MHz	100: N _{RB,c} = 66			100: N _{RB,c} = 66			100: N _{RB,c} = 66		
PDSCH Reference measurement channel	Config 1,2,3		SR.3.1 TDD		-	SR.3.1 TDD		-	SR.3.1 TDD		
RMSI CORESET Parameters	Config 1,2,3		CR.3.1 TDD		-	CR.3.1 TDD		-	CR.3.1 TDD		
Dedicated CORESET Parameters	Config 1,2,3		CCR.3.1 TDD		-	CCR.3.1 TDD		-	CCR.3.1 TDD		
OCNG Patterns	Config 1,2,3		OP.1								

SSB Configuration	Config 1,2,3		[SSB.xFR2-2]
SMTc Configuration	Config 1,2,3		SMTc.1
PRACH configuration	Config 1,2,3		FR2-2 PRACH configuration 1
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation conditions			AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: Void			

Table A.15.2.1.5.1-4: OTA related test parameters for FR2-2 SCell activation case

Parameter ^{Note 6}	Unit	Cell 1			Cell 2			Cell 3		
		T1	T2	T3	T1	T2	T3	T1	T2	T3
Angle of arrival configuration	Config 1,2,3	Setup 1 according to table A.3.15.1			Setup 1 according to table A.3.15.1			Setup 1 according to table A.3.15.1		
Assumption for UE beams ^{Note 7}	Config 1,2,3	Rough			Rough			Rough		
N_{oc} ^{Note1}	Config 1,2,3	dBm/15kHz ^{Note4}			-112			-112		
N_{oc} ^{Note1}	Config 1	dBm/SCS ^{Note3}			-102.97			-102.97		
	Config 2	-102.97			-102.97			-102.97		
	Config 3	-99.97			-99.97			-99.97		
$\hat{E}_s/N_{oc}$	Config 1,2,3	dB			14			14		
SS-RSRP ^{Note2}	Config 1	dBm/SCS ^{Note4}			-88.97			-88.97		
	Config 2	-88.97			-88.97			-88.97		
	Config 3	-85.97			-85.97			-85.97		
$\hat{E}_s/I_{ot}$	Config 1,2,3	dB			14			14		

Io ^{Note2}	Config 1	dBm/95.04 MHz ^{Note4}	-59.81	-59.81	-59.81
	Config 2		-59.81	-59.81	-59.81
	Config 3		-59.84	-59.84	-59.84
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone					
Note 6: Void					
Note 7: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.					

A.15.2.1.5.2 Test Requirements

The UE shall be capable to transmit valid CSI report for PCell (Cell 2) and to the directly activated SCell1 no later than in slot $n + N_{direct}$.

The SCell activation delay, N_{direct} , can be expressed as: $N_{direct} = T_{RRC_process} + T_{interrupt} + T_2 + T_3 + T_{activation_time} + T_{CSI_Reporting} - 3ms$; Where:

- $T_{RRC_Process}$: RRC procedure delay defined in clause 12 of TS 38.331 and it is equal to 16ms,
- $T_{interrupt}$: Interruption time during handover as specified in clause 6.1.1. The value to be verified in the test is 52 ms ($T_{interrupt} = 0$ ms for $T_{search} + 10$ ms for $T_{IU} + 20$ ms for $T_{processing} + 20$ ms for $T_{\Delta} + 2$ ms for T_{margin} ms) by assuming known SCell and SMTC.1 configuration.
- T_2 : Delay from slot $n + \frac{T_{RRC_Process} + T_{interrupt}}{NR\ slot\ length}$ until UE has obtained a valid TA command for the target PCell,
- T_3 : Delay for applying the received TA for uplink transmission in the target PCell, and greater than or equal to $k+1$ slot, where k is defined in clause 4.2 in TS 38.213,
- $T_{activation_time}$ and $T_{CSI_Reporting}$ are specified in clause 8.3.2, where the following definitions of $T_{FirstSSB}$ and $T_{FirstSSB_MAX}$ as defined in section 8.3.5 shall apply:

During time period T_2 of the test, the UE shall start sending CSI reports for SCell with non-zero CQI index at latest in a slot $n + \frac{T_{HARQ} + T_{activation_time} + T_{CSI_Reporting}}{NR\ slot\ length}$, $T_{activation_time} = T_{SMTC_SCell} + 5ms$, as defined in clause 8.3.

During time period T_3 of the test, the UE shall stop sending CSI reports for SCell at latest in a slot $m + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

During time period T_2 of the test, interruption of PCell / PSCell during SCell activation shall not happen outside the slot $n + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $n + 1 + \frac{T_{HARQ} + 3ms + T_X}{NR\ slot\ length} + N_{interruption}$, as defined in clause 8.3.

During time period T_3 of the test, the starting point of interruption of PCell during SCell deactivation shall not happen outside the slot $m + 1 + \frac{T_{HARQ}}{NR\ slot\ length}$ to $m + 1 + \frac{T_{HARQ} + 3ms}{NR\ slot\ length}$, as defined in clause 8.3.

The interruption on any activated serving cell shall not be more than the values specified for SA in clause 8.2.2.2.2.

All of the above test requirements shall be fulfilled in order for the observed SCell activation delay and SCell deactivation delay to be counted as correct. The rate of correct observed SCell activation delay and SCell deactivation delay during repeated tests shall be at least 90%.

NOTE: During time period T2 of the test, if there are no uplink resources for reporting the valid CSI in a slot $T_{\text{HARQ}} + T_{\text{activation_time}} + T_{\text{CSI_Reporting}}$ as defined in clause 8.3 then the UE shall use the next available NR slot length uplink resource for reporting the corresponding valid CSI.

A.15.3 RRC_CONNECTED state mobility

A.15.3.1 Handover

A.15.3.1.1 Intra-frequency handover from FR2-2 carrier with CCA to FR2-2 carrier with CCA; unknown target cell

A.15.3.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-2-NR FR2-2 intra frequency handover on carrier with CCA requirements specified in clause 6.1.1.4.

A.15.3.1.1.2 Test Parameters

Supported test configurations are shown in table A.15.3.1.1.2-1. Both handover delay and interruption length are tested by using the parameters in table A.15.3.1.1.2-2, and A.15.3.1.1.2-3.

The test scenario comprises of 1 carrier and two cells on the carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.15.3.1.1.2-1: Intra-frequency handover from FR2-2 carrier with CCA to FR2-2 carrier with CCA test configurations

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.15.3.1.1.2-2: General test parameters for Intra-frequency handover from FR2-2 carrier with CCA to FR2-2 carrier with CCA

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	On the carrier under CCA
	Neighbouring cell	Cell 2	On the carrier under CCA
Final condition	Active cell	Cell 2	On the carrier under CCA
A4-Offset	dBm	-120	
DL CCA model		A.3.26.2.1	
UL CCA model		A.3.26.2.2	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 10	

Table A.15.3.1.1.2-3: Cell specific test parameters for Intra-frequency handover from FR2-2 carrier with CCA to FR2-2 carrier with CCA

Parameter		Unit	Config	Cell 1		Cell 2	
				T1	T2	T1	T2
Assumption for UE beams ^{Note 6}			1,2,3	Rough		Rough	
AoA setup			1,2,3	Setup 1 as defined in A.3.15			
NR RF Channel Number			1,2,3	1		1	
P _{CCA} DL			1,2,3	0.93		0.93	
P _{CCA} UL			1,2,3	1		1	
Duplex mode			1,2,3	TDD			
TDD configuration			1	TBD			
			2	TBD			
			3	TBD			
BW _{channel}		MHz	1	100: N _{RB,c} = 66			
			2	400: N _{RB,c} = 66			
			3	400: N _{RB,c} = 33			
Data RBs allocated			1	66			
			2	66			
			3	33			
DRx Cycle		ms	1,2,3	Not Applicable			
PDSCH Reference measurement channel			1	SR3.1 TDD			
			2	TBD			
			3	TBD			
RMSI CORESET Reference Channel			1	CR3.1 TDD			
			2	TBD			
			3	TBD			
Control Channel RMC			1	CCR.3.1 TDD			
			2	TBD			
			3	TBD			
OCNG Patterns			1,2,3	O P. 1			
SMTC Configuration			1,2,3	SMTC pattern 1			
SSB Configuration			1	SSB. 3 FR2			
			2	SSB.13 FR2			
			3	SSB.14 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	1	120			
			2	480			
			3	960			
PUCCH/PUSCH subcarrier spacing		kHz	1	120			
			2	480			
			3	960			
PRACH configuration			1,2,3	FR2 PRACH configuration 1			
TRS configuration			1	TRS.2.1 TDD			
			2	TBD			
			3	TBD			
PDSCH/PDCCH TCI state			1,2,3	TCI.State.2			
BWP configuraiton	Initial DL BWP		1,2,3	DLBWP.0.1			
	Dedicated DL BWP		1,2,3	DLBWP.1.1			
	Initial UL BWP		1,2,3	ULBWP.0.1			
	Dedicated UL BWP		1,2,3	ULBWP.1.1			
EPRE ratio of PSS to SSS		dB		0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							

EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15k Hz		-104.7			
N_{oc} ^{Note2}	dBm/SC S	1	-95.7			
		2	-89.7			
		3	-86.7			
$\hat{E}_s / I_{ot}$	dB		6	-1.8	-Infinity	0
$\hat{E}_s / N_{oc}$	dB		6	6	-Infinity	7
I_o ^{Note3}	dBm/95.0 4 MHz ^{Note4}		-59.7	-56.7	-59.7	-56.7
	dBm/380. 16 MHz ^{Note4}		-53.7	-50.7	-53.7	-50.7
Propagation condition	-		AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.15.3.1.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than RRC procedure delay + $T_{interrupt}$ from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ is defined in clause 6.1B.1.3.2.

A.15.3.1.2 Inter-frequency handover from FR1 to FR2-2 carrier with CCA; unknown target cell

A.15.3.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR2-2 inter frequency handover on carrier with CCA requirements specified in clause 6.1.1.4.

A.15.3.1.2.2 Test Parameters

Supported test configurations are shown in table A.15.3.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.15.3.1.2.2-2, and A.15.3.1.2.2-3.

The test scenario comprises of 2 carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.15.3.1.2.2-1: Inter-frequency handover from FR1 to FR2-2 carrier with CCA test configurations

Configuration	Description for target cell	Description for serving cell
1	NR TDD, SSB SCS 120 kHz, data SCS 120 kHz, BW 100 MHz	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR TDD, SSB SCS 480 kHz, data SCS 480 kHz, BW 400 MHz	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR TDD, SSB SCS 960 kHz, data SCS 960 kHz, BW 400 MHz	NR 30 kHz SSB SCS, 40 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations		

Table A.15.3.1.2.2-2: General test parameters Inter-frequency handover from FR1 to FR2-2 carrier with CCA

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	On carrier with CCA
Final condition	Active cell	Cell 2	On carrier with CCA
A4-Offset	dBm	-120	
DL CCA model		A.3.26.2.1	
UL CCA model		A.3.26.2.2	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 10	

Table A.15.3.1.2.2-3: Cell specific test parameters for NR FR1-FR2-2 carrier with CCA Inter frequency handover test case

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams ^{Note 6}		1,2,3	-	-	Rough	
AoA setup		1,2,3	-	-	Setup 1 as defined in A.3.15	
NR RF Channel Number		1,2,3	1		2	
P _{CCA_DL}		1,2,3	-		0.93	
P _{CCA_UL}		1,2,3	-		1	
Duplex mode		1	FDD		TDD	
		2,3	TDD		TDD	
TDD configuration		1	-		TBD	
		2	TDDConf.1.1		TBD	
		3	TDDConf.2.1		TBD	

BW _{channel}	MHz	1	10: N _{RB,c} = 52	100: N _{RB,c} = 66
		2	10: N _{RB,c} = 52	400: N _{RB,c} = 66
		3	40: N _{RB,c} = 106	400: N _{RB,c} = 33
Data RBs allocated		1	52	66
		2	52	66
		3	106	33
DRx Cycle	ms	1,2,3	Not Applicable	Not Applicable
PDSCH Reference measurement channel		1	SR.1.1 FDD	SR3.1 TDD
		2	SR.1.1 TDD	TBD
		3	SR2.1 TDD	TBD
RMSI CORESET Reference Channel		1	CR.1.1 FDD	CR3.1 TDD
		2	CR.1.1 TDD	TBD
		3	CR2.1 TDD	TBD
Control Channel RMC		1	CCR.1.1 FDD	CCR.3.1 TDD
		2	CCR.1.1 TDD	TBD
		3	CCR.2.1 TDD	TBD
OCNG Patterns		1,2,3	O P. 1	O P. 1
SMTC Configuration		1	SMTC.1	SMTC pattern 1
		2,3	SMTC.2	SMTC pattern 1
SSB Configuration		1	SSB.1 FR1	SSB. 3 FR2
		2	SSB.1 FR1	SSB.13 FR2
		3	SSB.2 FR1	SSB.14 FR2
PDSCH/PDCCH subcarrier spacing	kHz	1	15	120
		2	30	480
		3	30	960
PUCCH/PUSCH subcarrier spacing	kHz	1	15	120
		2	30	480
		3	30	960
PRACH configuration		1,2,3	FR1 PRACH configuration 1	FR2 PRACH configuration 1
TRS configuration		1	TRS.1.1 FDD	TRS.2.1 TDD
		2	TRS.1.1 TDD	TBD
		3	TRS.1.2 TDD	TBD
PDSCH/PDCCH TCI state		1,2,3	-	TCI.State.2
BWP configuraiton	Initial DL BWP	1,2,3	DLBWP.0.1	DLBWP.0.1
	Dedicated DL BWP	1,2,3	LBWP.1.1	DLBWP.1.1
	Initial UL BWP	1,2,3	ULBWP.0.1	ULBWP.0.1
	Dedicated UL BWP	1,2,3	ULBWP.1.1	ULBWP.1.1
EPRE ratio of PSS to SSS	dB		0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N _{oc} ^{Note2}	dBm/15k Hz		Link only, see clause A.3.7A	-104.7
N _{oc} ^{Note2}	dBm/SC S	1		-95.7
		2		-89.7
		3		-86.7
$\hat{E}_s / I_{\text{at}}$	dB			-Infinity 7

$\hat{E}_s / N_{oc}$	dB		-Infinity	7
Io ^{Note3}	dBm/95.0 4 MHz Note4		-58.9	-58.9
	dBm/380. 16 MHz Note4		-52.9	-52.9
Propagation condition	-		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone				
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.15.3.1.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than RRC procedure delay + $T_{\text{interrupt}}$ from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{\text{interrupt}}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{\text{interrupt}}$ is defined in clause 6.1B.1.4.2.

A.15.4 Measurement procedure

A.15.4.1 Intra-frequency Measurements

A.15.4.1.1 SA event triggered reporting test without gap under non-DRX for FR2-2 with CCA

A.15.4.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2A.5.1 and 9.2A.5.2. Supported test configurations are shown in table A.15.4.1.1.1-1.

Table A.15.4.1.1.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2-2 neighbour cell (Cell 2) on the same frequency as the PCell with CCA transmitting SSBs according to DL CCA model. The test parameters for the Cell 1 and Cell 2 are given in Table A.15.4.1.1.1-2, A.15.4.1.1.1-3 and A.15.4.1.1.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.15.4.1.1.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 without gap without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1,2,3	PCell (Cell 1)	
Neighbour cell		1,2,3	Cell 2	Cell to be identified.
RF Channel Number		1,2,3	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		1,2,3	SMTC.1	
A3-Offset	dB	1,2,3	-11	
CP length		1,2,3	Normal	
Hysteresis	dB	1,2,3	0	
Time To Trigger	s	1,2,3	0	
Filter coefficient		1,2,3	0	L3 filtering is not used
DRX		1,2,3	OFF	
Time offset between Cell 1 and Cell 2		1,2,3	3 μ s	Synchronous cells
T1	s	1,2,3	5	
T2	s	1,2,3	5	

Table A.15.4.1.1.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,2,3	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
		2	400: N _{RB,c} = 66		400: N _{RB,c} = 66	
		3	400: N _{RB,c} = 33		400: N _{RB,c} = 33	
DL CCA model		1,2,3	As specified in clause TBD		As specified in clause TBD	
DL CCA probability		1,2,3	TBD		TBD	
Data RBs allocated		1	66		66	
		2	66		66	
		3	33		33	
Intial BWP configuration		1,2,3	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1,2,3	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1,2,3	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1,2,3	SSB		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2,3	SR.3.3 TDD			
		1	CR.3.1 TDD		N/A	

RMSI CORESET RMC configuration		2,3	CR.3.2 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
		2,3	CCR.3.7 TDD	N/A
TRS configuration		1,2,3	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI states		1,2,3	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1,2,3	120	120
OCNG Patterns		1,2,3	OP.5	N/A
cellIndividualOffset	dB	1,2,3	N/A	16
SSB		1	SSB.1 FR2	SSB.7 FR2
		2	SSB.9 FR2	SSB.15 FR2
		3	SSB.10 FR2	SSB.16 FR2
Propagation Condition		1, 2,3	No external noise (Note 1)	No external noise (Note 1)
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

Table A.15.4.1.1.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2-2 without gap without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1,2,3	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam assumption ^{Note 4}		1,2,3	Rough		Rough	
E _s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-83	-83	-Infinity	-83
		3	-80	-80	-Infinity	-80
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2,3	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-83	-83	-Infinity	-83
		3	-80	-80	-Infinity	-80
I _o	dBm/95.04MHz	1,2,3	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1, 2,3	Defined in Figure A.7.6.1.1.1-1			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Void					
Note 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					
Note 5:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.					

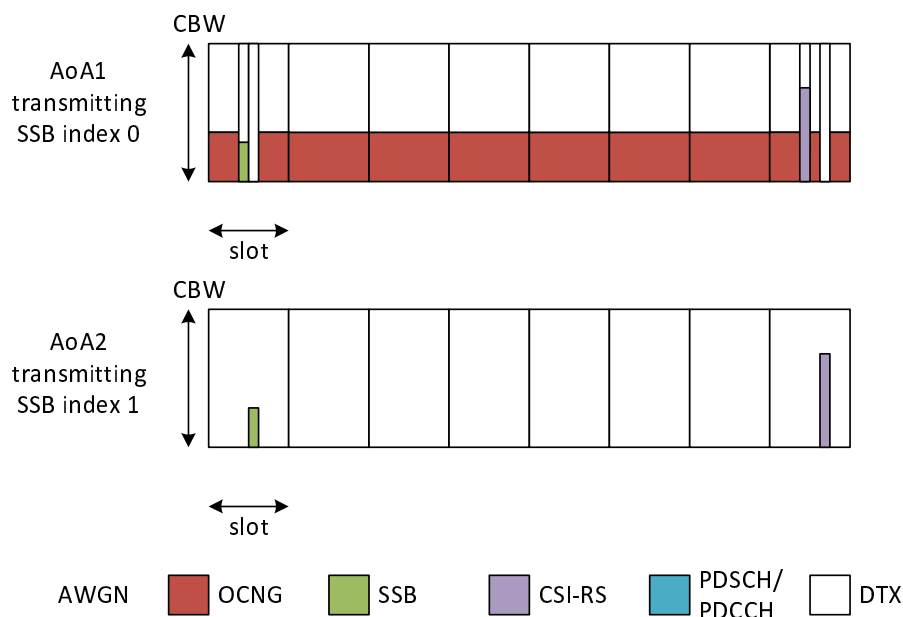


Figure A.15.4.1.1.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.15.4.1.1.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

- TBD for a UE supporting power class 1,
- TBD for a UE supporting power class 2 and 3

For Configuration 2,

- TBD for a UE supporting power class 1,
- TBD for a UE supporting power class 2 and 3

For Configuration 3,

- TBD for a UE supporting power class 1,
- TBD for a UE supporting power class 2 and 3

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.15.4.2 Inter-frequency Measurements

A.15.4.2.1 SA event triggered reporting tests for FR2-2 with CCA without SSB time index detection when DRX is not used (PCell in FR2-2)

A.15.4.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3A.4.

In this test, there are two cells: NR cell 1 as PCell in FR2-2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2-2 on NR RF channel 2 with CCA transmitting SSBs according to DL CCA model. The test parameters and configurations are given in Tables A.15.4.2.1.1-1, A.15.4.2.1.1-2, and A.15.4.2.1.1-3.

Measurement gap pattern configuration # 13 as defined in Table A.15.4.2.1.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.15.4.2.1.1-1.

Table A.15.4.2.1.1-1 SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	480 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
3	960 kHz SSB SCS, 400 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.15.4.2.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3	1	Two FR2-2 NR carrier frequencies is used.
Active cell		Config 1,2,3	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3	39	
SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
		Config 2	SSB.11 FR2	
		Config 3	SSB.12 FR2	
offsetMO	dB	Config 1,2,3	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1,2,3	-11	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	

Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1,2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	5.2 for PC1; 3.5 for other PC	

Table A.15.4.2.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2-2 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1,2,3	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption ^{Note 7}			1,2,3	Rough		Rough	
NR RF Channel Number			Config 1,2,3	1		2	
Duplex mode			Config 1,2,3	TDD		TDD	
TDD configuration			Config 1,2,3	TDDConf.3.1		TDDConf.3.1	
DL CCA model			Config 1,2,3	As specified in clause TBD		As specified in clause TBD	
DL CCA probability			Config 1,2,3	TBD		TBD	
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
			Config 2	400: N _{RB,c} = 66		400: N _{RB,c} = 66	
			Config 3	400: N _{RB,c} = 33		400: N _{RB,c} = 33	
Data RBs allocated			Config 1	66		66	
			Config 2	66		66	
			Config 3	33		33	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
			Config 2	400: N _{RB,c} = 66		400: N _{RB,c} = 66	
			Config 3	400: N _{RB,c} = 33		400: N _{RB,c} = 33	
BWP configuration	Initial DL BWP		Config 1,2,3	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,2,3	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1,2,3	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1,2,3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,3	120		120	
TRS configuration			Config 1,2,3	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1,2,3	TCI.State.2		N/A	
EPRE ratio of PSS to SSS							

EPRE ratio of PBCH DMRS to SSS		Config 1,2,3	0		0	
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
$\hat{E}_s$	dBm/S CS	Config 1	-87	-87	-Infinity	-87
		Config 2	-81	-81	-Infinity	-81
		Config 3	-78	-78	-Infinity	-78
SSBRP ^{Note 3}	dBm/S CS ^{Note5}	Config 1	-87	-87	-Infinity	-87
		Config 2	-81	-81	-Infinity	-81
		Config 3	-78	-78	-Infinity	-78
$\hat{E}_s / I_{ot_BB}$ ^{Note 8}	dB	Config 1,2,3	1.89	1.89	-Infinity	1.89
I_o ^{Note3}	dBm/95 .04 MHz ^{Note5}	Config 1,2,3	-58.01	-58.01	-Infinity	-58.01
Propagation Condition		Config 1,2,3	No external noise (Note 9)		No external noise (Note 9)	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void						
Note 3: SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Void						
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 8: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _s from TS 38.101-2 [19] Table 6.2.1.3-4.						
Note 9: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].						

A.15.4.2.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

For Configuration 1,

TBD for UE supporting power class 1, or

TBD for UE supporting other power class.

For Configuration 2,

TBD for UE supporting power class 1, or

TBD for UE supporting other power class.

For Configuration 3,

TBD for UE supporting power class 1, or

TBD for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16 NR standalone tests with all NR cells in FR1 for RedCap

A.16.1 SA: RRC_IDLE state mobility for RedCap

A.16.1.1 Cell re-selection to NR

A.16.1.1.1 Cell reselection to FR1 intra-frequency NR case for 1 Rx UE

A.16.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements specified in clause 4.2B.2.3.

A.16.1.1.1.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.16.1.1.1.2-1, A.16.1.1.1.2-2 and A.16.1.1.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.16.1.1.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.1.1.1.2-2: General test parameters for intra frequency NR cell re-selection test case for 1 Rx UE

Parameter	Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1

T2 end condition	Active cell		1, 2, 3, 4	Cell2	
	Neighbour cells		1, 2, 3, 4	Cell1	
Final condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
Access Barring Information	-		1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length	s		1, 2, 3, 4	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	
T1	s		1, 2, 3, 4	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s		1, 2, 3, 4	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s		1, 2, 3, 4	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.1.1.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case in AWGN for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1, 4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		

Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3, 4	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2, 4	-130			-130		
		3	-127			-127		
Pcompensation	dB	1, 2, 3, 4	0			0		
Qhyst _s	dB	1, 2, 3, 4	0			0		
Qoffset _{s, n}	dB	1, 2, 3, 4	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, 4	16	-3.11	2.79	-infinity	2.79	-3.11
		2						
		3						
N_{oc} Note2	dBm/SCS	1, 4	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1, 4	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1, 4	16	13	16	-infinity	16	13
		2						
		3						
SS-RSRP Note3	dBm/SCS	1, 4	-82	-85	-82	-infinity	-82	-85
		2	-82	-85	-82	-infinity	-82	-85
		3	-79	-82	-79	-infinity	-79	-82
I _o	dBm/9.36 MHz	1, 4	-53.94	-52.21	-52.21	Same as parameters specified in Cell 1 columns-		
	dBm/9.36 MHz	2	-53.94	-52.21	-52.21			
	dBm/18.36 MHz	3	-51.02	-49.30	-49.30			
Treselection	s	1, 2, 3, 4	0	0	0	0	0	0
SintrasearchP	dB	1, 2, 3, 4	60			60		
Propagation Condition		1, 2, 3, 4	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers							
	and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.16.1.1.1.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 34 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the

RRCSetupRequest message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{\text{detect,NR_Intra_RedCap}} + T_{\text{SI-NR}}$, and to an already detected cell can be expressed as: $T_{\text{evaluate,NR_Intra_RedCap}} + T_{\text{SI-NR}}$.

Where:

$T_{\text{detect,NR_Intra_RedCap}}$ See Table 4.2B.2.3-1 in clause 4.2B.2.3

$T_{\text{evaluate,NR_Intra_RedCap}}$ See Table 4.2B.2.3-1 in clause 4.2B.2.3

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 33.28 s, allow 34 s for the cell re-selection delay to a newly detectable cell and 7.68 s for the cell re-selection delay to an already detected cell in the test case, which we allow 8 s.

A.16.1.1.2 Cell reselection to FR1 intra-frequency NR case for 2 Rx UE

A.16.1.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements specified in clause 4.2B.2.3.

A.16.1.1.2.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.16.1.1.2.2-1, A.16.1.1.2.2-2 and A.16.1.1.2.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.16.1.1.2.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.1.1.2.2-2: General test parameters for intra frequency NR cell re-selection test case for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	
	Active cell		1, 2, 3, 4	Cell2	
	Neighbour cells		1, 2, 3, 4	Cell1	
Final condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	

Time offset between cells		1, 4	3 ms	Asynchronous cells
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
Access Barring Information	-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration		1, 4	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1, 4	SMTC.2	Configured in SIB2 of Cell 1
			SMTC.6	Configured in SIB2 of Cell 2
		2	SMTC.1	
		3	SMTC.1	
DRX cycle length	s	1, 2, 3, 4	1.28	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3, 4	Not configured	
T1	s	1, 2, 3, 4	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, The intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1, 2, 3, 4	40	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2, 3, 4	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.1.2.2-3: Cell specific test parameters for intra frequency NR cell re-selection test case in AWGN for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1, 4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3, 4	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2, 4	-130			-130		
		3	-127			-127		

Pcompensation	dB	1, 2, 3, 4	0			0		
Qhyst _s	dB	1, 2, 3	0			0		
Qoffset _{s, n}	dB	1, 2, 3, 4	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, 4	16	-3.11	2.79	-infinity	2.79	-3.11
		2						
		3						
N_{oc} Note2	dBm/SCS	1, 4	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1, 4	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1, 4	16	13	16	-infinity	16	13
		2						
		3						
SS-RSRP Note3	dBm/SCS	1, 4	-82	-85	-82	-infinity	-82	-85
		2	-82	-85	-82	-infinity	-82	-85
		3	-79	-82	-79	-infinity	-79	-82
I _o	dBm/9.36 MHz	1, 4	-53.94	-52.21	-52.21	Same as parameters specified in Cell 1 columns-		
	dBm/9.36 MHz	2	-53.94	-52.21	-52.21			
	dBm/18.36 MHz	3	-51.01	-49.30	-49.30			
Treselection	s	1, 2, 3, 4	0	0	0	0	0	0
SintrasearchP	dB	1, 2, 3, 4	60			60		
Propagation Condition		1, 2, 3, 4	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers							
	and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.16.1.1.2.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 34 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{\text{detect, NR_Intra}} + T_{\text{SI-NR}}$, and to an already detected cell can be expressed as: $T_{\text{evaluate, NR_intra}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{detect, NR_Intra}}$ See Table 4.2.2.3-1 in clause 4.2.2.3

$T_{\text{evaluate, NR_intra}}$ See Table 4.2.2.3-1 in clause 4.2.2.3

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280ms is assumed in this test case.

This gives a total of 33.28 s, allow 34 s for the cell re-selection delay to a newly detectable cell and 7.68 s for the cell re-selection delay to an already detected cell in the test case, which we allow 8 s.

A.16.1.1.3 Cell reselection to FR1 inter-frequency NR case for 1 Rx UE

A.16.1.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2B.2.4.

A.16.1.1.3.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.16.1.1.3.2-1, A.16.1.1.3.2-2 and A.16.1.1.3.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table A.16.1.1.3.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.1.1.3.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2, 3, 4	Cell 1	
T1 end condition	Active cell		1, 2, 3, 4	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3, 4	Cell2	
T3 end condition	Active cell		1, 2, 3, 4	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2, 3, 4	Cell 1	
RF Channel Number			1, 2, 3, 4	1, 2	
Time offset between cells			1, 4	3 ms	Asynchronous cells

		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
Access Barring Information	-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration		1, 4	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1, 4	SMTC.2	Configured in SIB4 of Cell 1
			SMTC.6	Configured in SIB4 of Cell 2
		2	SMTC.1	
		3	SMTC.1	
DRX cycle length	s	1, 2, 3, 4	1.28	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3, 4	Not configured	
T1	s	1, 2, 3, 4	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3, 4	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.1.3.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1, 4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3, 4	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2, 4	-140			-140		
		3	-137			-137		
Pcompensation	dB	1, 2, 3, 4	0			0		

Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, 4	14	14	14	-4	-infinity	12
		2						
		3						
N_{oc} ^{Note2}	dBm/SCS	1, 4	-98					
		2	-98					
		3	-95					
N_{oc} ^{Note2}	dBm/15 kHz	1, 4	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1, 4	14	14	14	-4	-infinity	12
		2						
		3						
SS-RSRP ^{Note3}	dBm/SCS	1, 4	-84	-84	-84	-102	-infinity	-86
		2	-84	-84	-84	-102	-infinity	-86
		3	-81	-81	-81	-99	-infinity	-83
Io	dBm/9.36 MHz	1, 4	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
	dBm/9.36 MHz	2	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
	dBm/18.36 MHz	3	-52.95	-52.95	-52.95	-65.67	-67.13	-54.86
Treselection	s	1, 2, 3, 4	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3, 4	50			50		
Thresh _{x, highP}	dB	1, 2, 3, 4	48			48		
Thresh _{serving, lowP}	dB	1, 2, 3, 4	44			44		
Thresh _{x, lowP}	dB	1, 2, 3, 4	50			50		
Propagation Condition		1, 2, 3, 4	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers							
	and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.16.1.1.3.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{evaluate,NR_Inter_RedCap}} + T_{\text{SI-NR}}$, and to a lower priority cell can be expressed as: $T_{\text{evaluate,NR_Inter_RedCap}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{higher_priority_search}}$ See clause 4.2B.2.7

$T_{\text{evaluate,NR_Inter_RedCap}}$ See Table 4.2B.2.4-1 in clause 4.2B.2.4

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

A.16.1.1.4 Cell reselection to FR1 inter-frequency NR case for 2 Rx UE

A.16.1.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2B.2.4.

A.16.1.1.4.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.16.1.1.4.2-1, A.16.1.1.4.2-2 and A.16.1.1.4.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

Table A.16.1.1.4.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.1.1.4.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case for 2 Rx UE

Parameter	Unit	Test configuration	Value	Comment
Initial condition	Active cell	1, 2, 3, 4	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		Cell 1	
T1 end condition	Active cell	1, 2, 3, 4	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		Cell2	
T3 end condition	Active cell	1, 2, 3, 4	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3

	Neighbour cell		1, 2, 3, 4	Cell 1	
RF Channel Number			1, 2, 3, 4	1, 2	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
Access Barring Information	-		1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB4 of Cell 1
				SMTC.6	Configured in SIB4 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length	s		1, 2, 3, 4	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	
T1	s		1, 2, 3, 4	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s		1, 2, 3, 4	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s		1, 2, 3, 4	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.1.4.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 4	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
PDSCH RMC configuration		1, 4	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3, 4	SSB			SSB		
Qrxlevmin	dBm/SCS	1, 2, 4	-140			-140		

		3	-137			-137		
Pcompensation	dB	1, 2, 3, 4	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP			SS-RSRP		
$\hat{E}_s / I_{ot}$	dB	1, 4	14	14	14	-4	-infinity	12
		2						
		3						
N_{oc} Note2	dBm/SCS	1, 4	-98					
		2	-98					
		3	-95					
N_{oc} Note2	dBm/15 kHz	1, 4	-98					
		2						
		3						
$\hat{E}_s / N_{oc}$	dB	1, 4	14	14	14	-4	-infinity	12
		2						
		3						
SS-RSRP Note3	dBm/SCS	1, 4	-84	-84	-84	-102	-infinity	-86
		2	-84	-84	-84	-102	-infinity	-86
		3	-81	-81	-81	-99	-infinity	-83
Io	dBm/9.36 MHz	1, 4	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
	dBm/9.36 MHz	2	-55.88	-55.88	-55.88	-68.60	-70.05	-57.78
	dBm/18.36 MHz	3	-52.95	-52.95	-52.95	-65.67	-67.12	-54.85
Treselection	s	1, 2, 3, 4	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2, 3, 4	50			50		
Thresh _{x, highP}	dB	1, 2, 3, 4	48			48		
Thresh _{serving, lowP}	dB	1, 2, 3, 4	44			44		
Thresh _{x, lowP}	dB	1, 2, 3, 4	50			50		
Propagation Condition		1, 2, 3, 4	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers							
	and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves							

A.16.1.1.4.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps again on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{evaluate,NR_Inter_RedCap}} + T_{\text{SI-NR}}$, and to a lower priority cell can be expressed as: $T_{\text{evaluate,NR_Inter_RedCap}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{higher_priority_search}}$ See clause 4.2B.2.7

$T_{\text{evaluate,NR_Inter_RedCap}}$ See Table 4.2B.2.4-1 in clause 4.2B.2.4

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

A.16.1.1.5 Cell reselection to FR1 intra-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

A.16.1.1.5.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE fulfilling stationary relaxed measurement criterion specified in clause 4.2B.2.9.2.

A.16.1.1.5.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.16.1.1.5.2-1, A.16.1.1.5.2-2 and A.16.1.1.5.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.16.1.1.5.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.1.1.5.2-2: General test parameters for FR1 intra frequency NR cell re-selection test case for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2, 3, 4	Cell2	
T1 end condition	Active cell		1, 2, 3, 4	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2, 3, 4	Cell1	
Final condition	Active cell		1, 2, 3, 4	Cell1	The UE reselects to cell 1 during T2 period

	Neighbour cells		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
Access Barring Information	-		1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length	s		1, 2, 3, 4	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	
T1	s		1, 2, 3, 4	35	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s		1, 2, 3, 4	35	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.1.5.2-3: Cell specific test parameters for FR1 intra frequency NR cell re-selection test case in AWGN for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		SR.1.1 FDD SR.1.1 TDD SR.2.1 TDD	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	

OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
Q _{rxlevmin}	dBm/SCS	1, 2, 4	-140		-140	
		3	-137		-137	
P _{compensation}	dB	1, 2, 3, 4	0		0	
Q _{hyst_s}	dB	1, 2, 3, 4	0		0	
Q _{offset_{s, n}}	dB	1, 2, 3, 4	0		0	
S _{SearchDeltaP-Stationary}	dB	1, 2, 3, 4	3		3	
T _{SearchDeltaP-Stationary}	s	1, 2, 3, 4	5		5	
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{ot}$	dB	1, 2, 3, 4	-3.11	2.79	2.79	-3.11
N_{oc} ^{Note2}	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note2}	dBm/15 kHz	1, 2, 3, 4	-98			
$\hat{E}_s / N_{oc}$	dB	1, 2, 3, 4	13	16	16	13
SS-RSRP ^{Note3}	dBm/SCS	1, 4	-85	-82	-82	-85
		2	-85	-82	-82	-85
		3	-82	-79	-79	-82
I _o	dBm/9.36 MHz	1, 4	-52.21	-52.21	specified in Cell 1 columns-	
	dBm/9.36 MHz	2	-52.21	-52.21		
	dBm/18.36 MHz	3	-49.28	-49.28		
T _{reselection}	s	1, 2, 3, 4	0	0	0	0
S _{intrasearchP}	dB	1, 2, 3, 4	60		60	
Propagation Condition		1, 2, 3, 4	AWGN			
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.16.1.1.5.3 Test Requirements

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected cell shall be less than 32 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell shall be less than 32 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detected cell can be expressed as: $T_{\text{evaluate,NR_Intra_RedCap_Relax}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ See Table 4.2B.2.9.2-1 in clause 4.2B.2.9.2 for reselection to Cell 2 during T1 with UE fulfilling stationary criterion, 30.72 s.

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 32 s for the cell re-selection delay to an already detected cell for UE fulfilling stationary criterion in the test case.

A.16.1.1.6 Cell reselection to FR1 intra-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

A.16.1.1.6.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE fulfilling stationary relaxed measurement criterion specified in clause 4.2B.2.9.2.

A.16.1.1.6.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.16.1.1.6.2-1, A.16.1.1.6.2-2 and A.16.1.1.6.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.16.1.1.6.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.1.1.6.2-2: General test parameters for FR1 intra frequency NR cell re-selection test case for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter	Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1
				The UE camps on cell 1 in the initial phase

	Neighbour cells		1, 2, 3, 4	Cell2	
T1 end condition	Active cell		1, 2, 3, 4	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2, 3, 4	Cell1	
Final condition	Active cell		1, 2, 3, 4	Cell1	The UE reselects to cell 1 during T2 period
	Neighbour cells		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
Access Barring Information	-		1, 2, 3	Not Sent	No additional delays in random access procedure.
SSB configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB2 of Cell 1
				SMTC.6	Configured in SIB2 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length	s		1, 2, 3, 4	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	
T1	s		1, 2, 3, 4	35	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s		1, 2, 3, 4	35	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.1.6.2-3: Cell specific test parameters for FR1 intra frequency NR cell re-selection test case in AWGN for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		SR.1.1 FDD SR.1.1 TDD SR.2.1 TDD	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			

RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2, 4	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3, 4	0		0	
Qhyst _s	dB	1, 2, 3, 4	0		0	
Qoffset _{s, n}	dB	1, 2, 3, 4	0		0	
S _{SearchDeltaP-Stationary}	dB	1, 2, 3, 4	3		3	
T _{SearchDeltaP-Stationary}	s	1, 2, 3, 4	5		5	
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP		SS-RSRP	
$\hat{E}_s / I_{\alpha}$	dB	1, 2, 3, 4	-3.11	2.79	2.79	-3.11
N_{oc} ^{Note2}	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note2}	dBm/15 kHz	1, 2, 3, 4	-98			
$\hat{E}_s / N_{oc}$	dB	1, 2, 3, 4	13	16	16	13
SS-RSRP ^{Note3}	dBm/SCS	1, 4	-85	-82	-82	-85
		2	-85	-82	-82	-85
		3	-82	-79	-79	-82
I _o	dBm/9.36 MHz	1, 4	-52.21	-52.21	specified in Cell 1 columns-	
	dBm/9.36 MHz	2	-52.21	-52.21		
	dBm/18.36 MHz	3	-49.28	-49.28		
Treselection	s	1, 2, 3, 4	0	0	0	0
SintrasearchP	dB	1, 2, 3, 4	60		60	
Propagation Condition		1, 2, 3, 4	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.16.1.1.6.3 Test Requirements

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected cell shall be less than 32 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to an already detected cell shall be less than 32 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detected cell can be expressed as: $T_{\text{evaluate,NR_Intra_RedCap_Relax}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ See Table 4.2B.2.9.2-2 in clause 4.2B.2.9.2 for reselection to Cell 2 during T1 with UE fulfilling stationary criterion, 30.72 s.

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 32 s for the cell re-selection delay to an already detected cell for UE fulfilling stationary criterion in the test case.

A.16.1.1.7 Cell reselection to FR1 inter-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

A.16.1.1.7.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2B.2.10.2, for UE fulfilling stationary relaxed measurement criterion.

A.16.1.1.7.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.16.1.1.7.2-1, A.16.1.1.7.2-2 and A.16.1.1.7.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

As specified in the Test Purpose, the UE is configured with the stationary relaxed measurement criterion for UE defined in clause 5.2.4.9.1 in [1]. So, Cell 2 and Cell 1 configure the UE as follows:

- *stationaryMobilityEvaluation* [2] criterion is configured according to the parameters listed in Table A.16.1.1.7.2-3;
- *cellEdgeEvaluationWhileStationary* [2] criterion is not configured;
- *combineRelaxedMeasCondition2* [2] is not configured;

Table A.16.1.1.7.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
---------------	-----------------------------	----------------------------

1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.1.1.7.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell2	The UE camps on cell 2 in the initial phase, it fulfills stationary relaxation measurements criterion, and during T1 period the UE reselects to cell 1
	Neighbour cells		1, 2, 3, 4	Cell1	
T1 end condition	Active cell		1, 2, 3, 4	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3, 4	Cell2	
T2 end condition	Active cell		1, 2, 3, 4	Cell2	The UE shall perform reselection to cell 2 with higher priority during T2
	Neighbour cells		1, 2, 3, 4	Cell1	
RF Channel Number			1, 2, 3, 4	1, 2	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB Configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB4 of Cell 1
				SMTC.6	Configured in SIB4 of Cell 2
			2	SMTC.1	
			3	SMTC.1	
DRX cycle length		s	1, 2, 3, 4	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2, 3, 4	Not configured	
T1		s	1, 2, 3, 4	35	T1 is defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4	35	T2 is defined so that cell re-selection reaction time is taken into account.

Table A.16.1.1.7.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		SR.1.1 FDD	
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2, 4	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3, 4	0		0	
Qhysts	dB	1, 2, 3, 4	0		0	
Qoffsets _{s, n}	dB	1, 2, 3, 4	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP		SS-RSRP	
$\hat{E}_s/I_{ot}$	dB	1, 4	14	14	-4	12
		2				
		3				
N_{oc} ^{Note2}	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note2}	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	14	14	-4	12
		2				
		3				
SS-RSRP ^{Note3}	dBm/SCS	1, 4	-84	-84	-102	-86
		2	-84	-84	-102	-86
		3	-81	-81	-99	-83
Io	dBm/9.36 MHz	1, 4	-55.88	-55.88	-68.60	-57.78
	dBm/9.36 MHz	2	-55.88	-55.88	-68.60	-57.78
	dBm/18.36 MHz	3	-52.96	-52.96	-65.67	-54.85
Treselection	s	1, 2, 3, 4	0	0	0	0

SnointrasearchP	dB	1, 2, 3, 4	Not sent	Not sent
Thresh _{x, highP}	dB	1, 2, 3, 4	48	48
Thresh _{serving, lowP}	dB	1, 2, 3, 4	44	44
Thresh _{x, lowP}	dB	1, 2, 3, 4	50	50
S _{SearchDeltaP-Stationary}	dB	1, 2, 3	3	3
T _{SearchDeltaP-Stationary}	s	1, 2, 3	5	5
Propagation Condition		1, 2, 3	AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.16.1.1.7.3 Test Requirements

The cell reselection delay to an already detected lower priority cell for UE fulfilling stationary relaxed measurements is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to a lower priority cell for UE fulfilling stationary relaxed measurements shall be less than 32 s.

The cell reselection delay to an already detected higher priority cell for UE fulfilling stationary relaxed measurements is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to an already detected higher priority cell for UE fulfilling stationary relaxed measurements shall be less than 32 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a known lower priority cell can be expressed as: $T_{\text{evaluate,NR_Inter_RedCap_Relax}} + T_{\text{SI-NR}}$

Where:

$T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ See Table 4.2B.2.10.2-1 in clause 4.2B.2.10.2

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 32 s for the cell re-selection delay to an already detected lower priority cell and 32 s for the cell re-selection delay to an already detected higher priority cell, for UE fulfilling stationary relaxed measurements in the test case.

A.16.1.1.8 Cell reselection to FR1 inter-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

A.16.1.1.8.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2B.2.10.2, for UE fulfilling stationary relaxed measurement criterion.

A.16.1.1.8.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.16.1.1.8.2-1, A.16.1.1.8.2-2 and A.16.1.1.8.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1.

As specified in the Test Purpose, the UE is configured with the stationary relaxed measurement criterion for UE defined in clause 5.2.4.9.1 in [1]. So, Cell 2 and Cell 1 configure the UE as follows:

- *stationaryMobilityEvaluation* [2] criterion is configured according to the parameters listed in Table A.16.1.1.8.2-3;
- *cellEdgeEvaluationWhileStationary* [2] criterion is not configured;
- *combineRelaxedMeasCondition2* [2] is not configured;

Table A.16.1.1.8.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.1.1.8.2-2: General test parameters for FR1 inter frequency NR cell re-selection test case for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell2	The UE camps on cell 2 in the initial phase, it fulfills stationary relaxation measurements criterion, and during T1 period the UE reselects to cell 1
	Neighbour cells		1, 2, 3, 4	Cell1	
T1 end condition	Active cell		1, 2, 3, 4	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2, 3, 4	Cell2	
T2 end condition	Active cell		1, 2, 3, 4	Cell2	The UE shall perform reselection to cell 2 with higher priority during T2
	Neighbour cells		1, 2, 3, 4	Cell1	
RF Channel Number			1, 2, 3, 4	1, 2	
Time offset between cells			1, 4	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB Configuration			1, 4	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
SMTC configuration			1, 4	SMTC.2	Configured in SIB4 of Cell 1
				SMTC.6	Configured in SIB4 of Cell 2
			2	SMTC.1	

		3	SMTC.1	
DRX cycle length	s	1, 2, 3, 4	0.64	The value shall be used for all cells in the test.
PRACH configuration index		1, 2, 3, 4	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2, 3, 4	Not configured	
T1	s	1, 2, 3, 4	35	T1 is defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4	35	T2 is defined so that cell re-selection reaction time is taken into account.

Table A.16.1.1.8.2-3: Cell specific test parameters for FR1 inter frequency NR cell re-selection test case in AWGN for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		SR.1.1 FDD	
		2	SR.1.1 TDD		SR.1.1 TDD	
		3	SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
Qrxlevmin	dBm/SCS	1, 2, 4	-140		-140	
		3	-137		-137	
Pcompensation	dB	1, 2, 3, 4	0		0	
Qhysts	dB	1, 2, 3, 4	0		0	
Qoffsets _{s, n}	dB	1, 2, 3, 4	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4	SS-RSRP		SS-RSRP	
$\hat{E}_s/I_{ot}$	dB	1, 4	14	14	-4	12
		2				
		3				
N_{oc} ^{Note2}	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note2}	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	14	14	-4	12
		2				
		3				
SS-RSRP ^{Note3}	dBm/SCS	1, 4	-84	-84	-102	-86
		2	-84	-84	-102	-86
		3	-81	-81	-99	-83
Io	dBm/9.36 MHz	1, 4	-55.88	-55.88	-68.60	-57.78
	dBm/9.36 MHz	2	-55.88	-55.88	-68.60	-57.78
	dBm/18.36 MHz	3	-52.95	-52.95	-65.67	-54.86
Treselection	s	1, 2, 3, 4	0	0	0	0

SnointrasearchP	dB	1, 2, 3, 4	Not sent	Not sent
Thresh _{x, highP}	dB	1, 2, 3, 4	48	48
Thresh _{serving, lowP}	dB	1, 2, 3, 4	44	44
Thresh _{x, lowP}	dB	1, 2, 3, 4	50	50
S _{SearchDeltaP-Stationary}	dB	1, 2, 3, 4	3	3
T _{SearchDeltaP-Stationary}	s	1, 2, 3, 4	5	5
Propagation Condition		1, 2, 3, 4	AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.16.1.1.8.3 Test Requirements

The cell reselection delay to an already detected lower priority cell for UE fulfilling stationary relaxed measurements is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 1.

The cell re-selection delay to a lower priority cell for UE fulfilling stationary relaxed measurements shall be less than 32 s.

The cell reselection delay to an already detected higher priority cell for UE fulfilling stationary relaxed measurements is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to an already detected higher priority cell for UE fulfilling stationary relaxed measurements shall be less than 32 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a known lower priority cell can be expressed as: $T_{\text{evaluate,NR_Inter_RedCap_Relax}} + T_{\text{SI-NR}}$

Where:

$T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ See Table 4.2B.2.10.2-2 in clause 4.2B.2.10.2

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 32 s for the cell re-selection delay to an already detected lower priority cell and 32 s for the cell re-selection delay to an already detected higher priority cell, for UE fulfilling stationary relaxed measurements in the test case.

A.16.1.2 Inter-RAT E-UTRAN cell re-selection for RedCap

A.16.1.2.1 Cell reselection to higher priority E-UTRAN for 1RX

A.16.1.2.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2B.2.5 when the E-UTRAN cell is of higher priority.

A.16.1.2.1.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.16.1.2.1.2-1, A.16.1.2.1.2-2, A.16.1.2.1.2-3 and A.16.1.2.1.2-4. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. NR cell 1 is already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of higher priority than cell 1.

Table A.16.1.2.1.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.1.2.1.2-2: General test parameters for NR to E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase and during T2 period the UE reselects to cell 2.
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T2.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T3 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 during T3 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2

E-UTRAN PRACH configuration index		1, 2, 3, 7	53	As specified in table 5.7.1-2 in TS 36.211 [23]
		4, 5, 6, 8	4	
E-UTRAN PRACH configuration index		1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211 [23]
		4, 5, 6	4	
T1	s	1, 2, 3, 4, 5, 6, 7, 8	>7	During T1, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T2.
T2	s	1, 2, 3, 4, 5, 6, 7, 8	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2, 3, 4, 5, 6, 7, 8	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.2.1.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1		
			T1	T2	T3
TDD configuration		1, 4, 7, 8	N/A		
		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH parameters		1, 4, 7, 8	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET parameters		1, 4, 7, 8	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
Dedicated CORESET parameters		1, 4, 7, 8	CCR.1.1 FDD		
		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
SSB parameters		1, 4, 7, 8	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.1 RedCap FR1		
NR SMTC parameters		1, 4, 7, 8	SMTC.2		
		2, 5	SMTC.1		
		3, 6	SMTC.1		
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1		
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB		
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140		
		3, 6	-137		
N_{oc}	dBm/SCS	1, 4, 7, 8	-98		
		2, 5	-98		
		3, 6	-95		
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-98		
SS-RSRP	dBm/SCS	1, 4, 7, 8	-84	-84	-84
		2, 5	-84	-84	-84
		3, 6	-81	-81	-81
$\hat{E}_s / I_{ot}$	dB	1, 4, 7, 8	14	14	14
		2, 5			

$\hat{E}_s / N_{oc}$	dB	3, 6	14	14	14
		1, 4, 7, 8			
		2, 5			
		3, 6			
Io	dBm/9.36 MHz	1, 4, 7, 8	-55.88	-55.88	-55.88
	dBm/9.36 MHz	2, 5	-55.88	-55.88	-55.88
	dBm/18.36 MHz	3, 6	-52.95	-52.95	-52.95
Treselection	S	1, 2, 3, 4, 5, 6, 7, 8	0		
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
Thresh _{x, highP} (Note 2)	dB	1, 2, 3, 4, 5, 6, 7, 8	48		
Thresh _{serving, lowP}	dB	1, 2, 3, 4, 5, 6, 7, 8	44		
Thresh _{x, lowP}	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	This refers to the value of Thresh _{x, high} which is included in NR system information, and is a threshold for the E-UTRA target cell				

Table A.16.1.2.1.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2		
		T1	T2	T3
E-UTRA RF Channel number		1		
BW _{channel}	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA ^{Note 1}	dB			
OCNG_RB ^{Note 1}	dB			
Qrxlevmin	dBm	-140		
N _{oc}	dBm/15 kHz	-98		
RSRP	dBm/15 KHz	-infinity	-86	-102
$\hat{E}_s / I_{ot}$	dB	-infinity	12	-4
$\hat{E}_s / N_{oc}$	dB	-infinity	12	-4
Treselection _{EUTRAN}	S	0		
SnonintrasearchP	dB	Not sent		
Thresh _{x, highP}	dB	48		
Thresh _{serving, lowP}	dB	44		
Thresh _{x, lowP} (Note 2)	dB	50		
Propagation Condition		AWGN		

- | | |
|---------|---|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | This refers to the value of $\text{Thresh}_{x, \text{Low}}$ which is included in E-UTRA system information, and is a threshold for the NR target cell |

A.16.1.2.1.3 Test Requirements

The cell reselection delay to a higher priority E-UTRAN cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search_RedCap}} + T_{\text{evaluate, E-UTRAN_RedCap}} + T_{\text{SI-E-UTRA}}$

Where:

$T_{\text{higher_priority_search_RedCap}}$ See clause 4.2B.2.7

$T_{\text{evaluate, E-UTRAN_RedCap}}$ See Table 4.2B.2.5-1 in clause 4.2B.2.5

$T_{\text{SI-E-UTRA}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority E-UTRAN cell.

A.16.1.2.2 Cell reselection to higher priority E-UTRAN for 2RX

A.16.1.2.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2.2.5 when the E-UTRAN cell is of higher priority.

A.16.1.2.2.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.16.1.2.2.2-1, A. 16.1.2.2.2-2, A. 16.1.2.2.2-3 and A. 16.1.2.2.2-4. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. NR cell 1 is already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of higher priority than cell 1.

Table A.16.1.2.2.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode

7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A. 16.1.2.2.2-2: General test parameters for NR to E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase and during T2 period the UE reselects to cell 2.
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T2.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T3 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 during T3 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3, 7	53	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6, 8	4	
E-UTRAN PRACH configuration index			1, 2, 3	53	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6	4	
T1		s	1, 2, 3, 4, 5, 6, 7, 8	>7	During T1, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T2.
T2		s	1, 2, 3, 4, 5, 6, 7, 8	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3		s	1, 2, 3, 4, 5, 6, 7, 8	15	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A. 16.1.2.2.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1		
			T1	T2	T3
TDD configuration		1, 4, 7, 8	N/A		
		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH parameters		1, 4, 7, 8	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET parameters		1, 4, 7, 8	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
Dedicated CORESET parameters		1, 4, 7, 8	CCR.1.1 FDD		

		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
SSB parameters		1, 4, 7, 8	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.1 RedCap FR1		
NR SMTC parameters		1, 4, 7, 8	SMTC.2		
		2, 5	SMTC.1		
		3, 6	SMTC.1		
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1		
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB		
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140		
		3, 6	-137		
N_{oc}	dBm/SCS	1, 4, 7, 8	-98		
		2, 5	-98		
		3, 6	-95		
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-98		
SS-RSRP	dBm/SCS	1, 4, 7, 8	-84	-84	-84
		2, 5	-84	-84	-84
		3, 6	-81	-81	-81
$\hat{E}_s/I_{ot}$	dB	1, 4, 7, 8	14	14	14
		2, 5			
		3, 6			
$\hat{E}_s/N_{oc}$	dB	1, 4, 7, 8	14	14	14
		2, 5			
		3, 6			
Io	dBm/9.36 MHz	1, 4, 7, 8	-55.88	-55.88	-55.88
	dBm/9.36 MHz	2, 5	-55.88	-55.88	-55.88
	dBm/18.36 MHz	3, 6	-52.95	-52.95	-52.95
Treselection	S	1, 2, 3, 4, 5, 6, 7, 8	0		
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
Thresh _{x, highP} (Note 2)	dB	1, 2, 3, 4, 5, 6, 7, 8	48		
Thresh _{serving, lowP}	dB	1, 2, 3, 4, 5, 6, 7, 8	44		
Thresh _{x, lowP}	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	This refers to the value of Thresh _{x, high} which is included in NR system information, and is a threshold for the E-UTRA target cell				

Table A. 16.1.2.2.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2		
		T1	T2	T3
E-UTRA RF Channel number		1		
BW _{channel}	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6		
PBCH_RA	dB	0		
PBCH_RB	dB			

PSS_RA	dB						
SSS_RA	dB						
PCFICH_RB	dB						
PHICH_RA	dB						
PHICH_RB	dB						
PDCCH_RA	dB						
PDCCH_RB	dB						
PDSCH_RA	dB						
PDSCH_RB	dB						
OCNG_RA ^{Note 1}	dB						
OCNG_RB ^{Note 1}	dB						
Qrxlevmin	dBm				-140		
N_{oc}	dBm/15 kHz				-98		
RSRP	dBm/15 KHz	-infinity	-86	-102			
$\hat{E}_s/I_{ot}$	dB	-infinity	12	-4			
$\hat{E}_s/N_{oc}$	dB	-infinity	12	-4			
Treselection _{EUTRAN}	S	0					
SnonintrasearchP	dB	Not sent					
Thresh _{x, highP}	dB	48					
Thresh _{serving, lowP}	dB	44					
Thresh _{x, lowP} (Note 2)	dB	50					
Propagation Condition		AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	This refers to the value of Thresh _{x, Low} which is included in E-UTRA system information, and is a threshold for the NR target cell						

A.16.1.2.2.3 Test Requirements

The cell reselection delay to a higher priority E-UTRAN cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search_RedCap}} + T_{\text{evaluate, E-UTRAN_RedCap}} + T_{\text{SI-E-UTRA}}$

Where:

$T_{\text{higher_priority_search_RedCap}}$ See clause 4.2B.2.7

$T_{\text{evaluate, E-UTRAN_RedCap}}$ See Table 4.2B.2.5-1 in clause 4.2B.2.5

$T_{\text{SI-E-UTRA}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority E-UTRAN cell.

A.16.1.2.3 Cell reselection to lower priority E-UTRAN for 1RX

A.16.1.2.3.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2B.2.5 when the E-UTRAN cell is of lower priority.

A. 16.1.2.3.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A16.1.2.3.2-1, A16.1.2.3.2-2, A16.1.2.3.2-3 and A16.1.2.3.2-4. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

Table A.16.1.2.3.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.1.2.3.2-2: General test parameters for NR to E-UTRAN cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T1.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3, 7	534	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6, 8		

T1	s	1, 2, 3, 4, 5, 6, 7, 8	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4, 5, 6, 7, 8	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A. 16.1.2.3.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4, 7, 8	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4, 7, 8	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4, 7, 8	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4, 7, 8	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4, 7, 8	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.1 RedCap FR1	
SMTTC configuration		1, 4, 7, 8	SMTTC.2	
		2, 5	SMTTC.1	
		3, 6	SMTTC.1	
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB	
$Q_{rxlevmin}$	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
		1, 4, 7, 8	-98	
N_{oc}	dBm/SCS	2, 5	-98	
		3, 6	-95	
		1, 2, 3, 4, 5, 6, 7, 8	-98	
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
		1, 4, 7, 8	-102	-86
		2, 5	-102	-86
$\hat{E}_s/I_{ot}$	dB	3, 6	-99	-83
		1, 4, 7, 8	-4	12
		2, 5	-4	12
$\hat{E}_s/N_{oc}$	dB	3, 6		
		1, 4, 7, 8		
		2, 5	-68.60	-57.78
Io	dBm/9.36 MHz	3, 6		
		1, 4, 7, 8		
		2, 5	-68.60	-57.78
Treselection	S	3, 6	-65.67	-54.85
		1, 4, 7, 8	0	
		2, 5	0	
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6, 7, 8	Not sent	
Thresh _{x, highP}	dB	1, 2, 3, 4, 5, 6, 7, 8	48	
Thresh _{serving, lowP}	dB	1, 2, 3, 4, 5, 6, 7, 8	44	
Thresh _{1x, lowP} (Note 2)	dB	1, 2, 3, 4, 5, 6, 7, 8	50	

Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	This refers to the value of $\text{Thresh}_{x, \text{high}}$ which is included in NR system information, and is a threshold for the E-UTRA target cell		

Table A.16.1.2.3.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
BW _{channel}	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note 1}	dB		
OCNG_RB ^{Note 1}	dB		
Qrxlevmin	dBm	-140	
N _{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s/I_{ot}$	dB	14	14
$\hat{E}_s/N_{oc}$	dB	14	14
Treselection _{EUTRAN}	S	0	
SnonintrasearchP	dB	Not sent	
Thresh _{x, highP} (Note 2)	dB	48	
Thresh _l serv _{ing, lowP}	dB	44	
Thresh _{x, lowP}	dB	50	
Propagation Condition		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: This refers to the value of Thresh _{x, high} which is included in E-UTRA system information, and is a threshold for the NR target cell			

A.16.1.2.3.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{\text{evaluate, E-UTRAN}} + T_{\text{SI-E-UTRA}}$,

Where:

$T_{\text{higher_priority_search_RedCap}}$ See clause 4.2B.2.7

$T_{\text{evaluate, E-UTRAN_RedCap}}$ See Table 4.2B.2.5-1 in clause 4.2B.2.5

$T_{\text{SI-E-UTRA}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8 s for the cell re-selection delay to a lower priority E-UTRAN cell.

A.16.1.2.4 Cell reselection to lower priority E-UTRAN for 2RX

A.16.1.2.4.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection requirements specified in clause 4.2B.2.5 when the E-UTRAN cell is of lower priority.

A.16.1.2.4.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A16.1.2.4.2-1, A16.1.2.4.2-2, A16.1.2.4.2-3 and A16.1.2.4.2-4. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

Table A.16.1.2.4.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A. 16.1.2.4.2-2: General test parameters for NR to E-UTRAN cell re-selection test case

Parameter	Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	The UE camps on cell 1 in the initial phase.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	The UE shall perform reselection to cell 2 during T1.

	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 during T2 for iteration of the tests.
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	1.28	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3, 7	534	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6, 8		
T1		s	1, 2, 3, 4, 5, 6, 7, 8	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6, 7, 8	75	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A. 16.1.2.4.2-3: Cell specific test parameters for NR cell 1

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4, 7, 8	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4, 7, 8	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4, 7, 8	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4, 7, 8	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4, 7, 8	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.1 RedCap FR1	
SMTC configuration		1, 4, 7, 8	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SMTC.1	
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5, 7, 8	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4, 7, 8	-98	
		2, 5	-98	
		3, 6	-95	
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
SS-RSRP	dBm/SCS	1, 4, 7, 8	-102	-86
		2, 5	-102	-86
		3, 6	-99	-83

$\hat{E}_s / I_{ot}$	dB	1, 4, 7, 8	-4	12
		2, 5		
		3, 6		
$\hat{E}_s / N_{oc}$	dB	1, 4, 7, 8	-4	12
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4, 7, 8	-68.60	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-57.78
	dBm/18.36 MHz	3, 6	-65.67	-54.85
Treselection	S	1, 2, 3, 4, 5, 6, 7, 8	0	
SnonintrasearchP	dB	1, 2, 3, 4, 5, 6, 7, 8	Not sent	
Thresh _{x, highP}	dB	1, 2, 3, 4, 5, 6, 7, 8	48	
Thresh _{serving, lowP}	dB	1, 2, 3, 4, 5, 6, 7, 8	44	
Thresh _{x, lowP} (Note 2)	dB	1, 2, 3, 4, 5, 6, 7, 8	50	
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: This refers to the value of Thresh _{x, high} which is included in NR system information, and is a threshold for the E-UTRA target cell				

Table A. 16.1.2.4.2-4: Cell specific test parameters for E-UTRA cell 2

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
BW _{channel}	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note 1}	dB		
OCNG_RB ^{Note 1}	dB		
Qrxlevmin	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s / I_{ot}$	dB	14	14
$\hat{E}_s / N_{oc}$	dB	14	14
Treselection _{EUTRAN}	S	0	
SnonintrasearchP	dB	Not sent	
Thresh _{x, highP} (Note 2)	dB	48	
Thresh _{serving, lowP}	dB	44	
Thresh _{x, lowP}	dB	50	
Propagation Condition		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	This refers to the value of $\text{Thresh}_{x, \text{high}}$ which is included in E-UTRA system information, and is a threshold for the NR target cell

A.16.1.3.1.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 8 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{\text{evaluate, E-UTRAN}} + T_{\text{SI-E-UTRA}}$,

Where:

$T_{\text{higher_priority_search_RedCap}}$ See clause 4.2B.2.7

$T_{\text{evaluate, E-UTRAN_RedCap}}$ See Table 4.2B.2.5-1 in clause 4.2B.2.5

$T_{\text{SI-E-UTRA}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8 s for the cell re-selection delay to a lower priority E-UTRAN cell.

A.16.1.2.5 Cell reselection to lower priority E-UTRAN for UE fulfilling stationary relaxed measurement criterion for 1 Rx UE

A.16.1.2.5.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection when UE fulfills the stationary relaxed measurement criterion specified in clause 4.2B.2.11.2 and the E-UTRAN cell is of lower priority.

A.16.1.2.5.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.16.1.2.5.2-1, A.16.1.2.5.2-2, A.16.1.2.5.2-3 and A.16.1.2.5.2-4. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

As specified in the Test Purpose, the UE is configured with the stationary relaxed measurement criterion defined in clause 5.2.4.9.1 in [1]. So, Cell 1 configures the UE as follows:

- *stationaryMobilityEvaluation* [2] criterion is configured according to the parameters listed in Table A.16.1.1.8.2-3;
- *cellEdgeEvaluationWhileStationary* [2] criterion is not configured;
- *combineRelaxedMeasCondition2* [2] is not configured;

Table A.16.1.2.5.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.1.2.5.2-2: General test parameters for NR to E-UTRAN cell re-selection test case for UE fulfilling stationary criterion for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment	
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase, it fulfills stationary criterion, and during T1 period the UE reselects to cell 2	
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell2		
T1 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T1	
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell1		
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 with higher priority during T2 for iteration of the tests.	
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell2		
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.	
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	0.64	The value shall be used for all cells in the test.	
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2	
E-UTRAN PRACH configuration index			1, 2, 3, 7, 8	53	As specified in table 5.7.1-2 in TS 36.211 [23]	
			4, 5, 6	4		
T1		s	1, 2, 3, 4, 5, 6, 7, 8	35	T1 needs to be defined so that cell re-selection reaction time is taken into account.	
T2		s	1, 2, 3, 4, 5, 6, 7, 8	35	T2 needs to be defined so that cell re-selection reaction time is taken into account.	

Table A.16.1.2.5.2-3: Cell specific test parameters for NR cell 1 for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4, 7, 8	N/A	
		2, 5	TDDConf.1.1	

PDSCH RMC configuration		3, 6	TDDConf.2.1	
		1, 4, 8	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
RMSI CORESET RMC configuration		3, 6	SR.2.1 TDD	
		1, 4, 8	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
Dedicated CORESET RMC configuration		3, 6	CR.2.1 TDD	
		1, 4, 8	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
SSB configuration		3, 6	CCR.2.1 TDD	
		1, 4, 8	SSB.1 FR1	
		2, 5	SSB.1 FR1	
SMTC configuration		3, 6	SSB.1 RedCap FR1	
		1, 4, 8	SMTC.2	
		2, 5	SMTC.1	
OCNG Pattern		3, 6	SMTC.1	
		1, 2, 3, 4, 5, 6, 7, 8	OP.1 defined in A.3.2.1	
		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
N_{oc}	dBm/SCS	1, 4, 8	-98	
		2, 5	-98	
		3, 6	-95	
		1, 2, 3, 4, 5, 6, 7, 8	-98	
N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
		1, 4, 8	-102	-86
		2, 5		
SS-RSRP	dBm/SCS	3, 6	-99	-83
		1, 4, 8	-4	12
		2, 5		
$\hat{E}_s/I_{ot}$	dB	3, 6		
		1, 4, 8		
		2, 5		
$\hat{E}_s/N_{oc}$	dB	3, 6	-4	12
		1, 4, 8		
		2, 5		
Io	dBm/9.36 MHz	1, 4, 8	-68.60	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-57.78
	dBm/18.36 MHz	3, 6	-65.67	-54.85
TreselectionP	S	1, 2, 3, 4, 5, 6, 7, 8	0	
Snonintrasearch	dB	1, 2, 3, 4, 5, 6, 7, 8	50	
Thresh _{x, highP}	dB	1, 2, 3, 4, 5, 6, 7, 8	48	
Thresh _{serving, lowP}	dB	1, 2, 3, 4, 5, 6, 7, 8	44	
Thresh _{x, lowP} (Note 2)	dB	1, 2, 3, 4, 5, 6, 7, 8	50	
S _{SearchDeltaP-Stationary}	dB	1, 2, 3, 4, 5, 6, 7, 8	3	
T _{SearchDeltaP-Stationary}	s	1, 2, 3, 4, 5, 6, 7, 8	5	
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	This refers to the value of Thresh _{x, low} which is included in NR system information, and is a threshold for the E-UTRA target cell			

Table A.16.1.2.5.2-4: Cell specific test parameters for E-UTRA cell 2 for 1 Rx UE

Parameter	Unit	Cell 2	
		T1	T2

E-UTRA RF Channel number		1	
BW _{channel}	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note 1}	dB		
OCNG_RB ^{Note 1}	dB		
Qrxlevmin	dBm	-140	
N _{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s/I_{ot}$	dB	14	14
$\hat{E}_s/N_{oc}$	dB	14	14
Treselection _{EUTRAN}	S	0	
Snonintrasearch	dB	Not sent	
Thresh _{x, high} (Note 2)	dB	48	
Thresh _{serving, low}	dB	44	
Thresh _{x, low}	dB	50	
Propagation Condition		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: This refers to the value of Thresh _{x, high} which is included in E-UTRA system information, and is a threshold for the NR target cell			

A.16.1.2.5.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell with UE fulfilling stationary relaxed measurement criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRConnectionRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 32 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{\text{evaluate, EUTRAN_Relax}} + T_{\text{SI-E-UTRA}}$,

Where:

$T_{\text{evaluate, EUTRAN_Relax}}$ See Table 4.2B.2.11.2-1 in clause 4.2B.2.11.2

$T_{\text{SI-E-UTRA}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of $30.72 (T_{\text{evaluate,EUTRAN_Relax}}) + 1.28 (T_{\text{SI-E-UTRA}}) = 32 \text{ s}$ for the cell re-selection delay to a lower priority E-UTRAN cell for stationary relaxed measurement criterion.

A.16.1.2.6 Cell reselection to lower priority E-UTRAN for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

A.16.1.2.6.1 Test Purpose and Environment

This test is to verify the requirement for the NR to E-UTRAN inter-RAT cell reselection when UE fulfills the stationary relaxed measurement criterion specified in clause 4.2B.2.11.2 and the E-UTRAN cell is of lower priority.

A.16.1.2.6.2 Test Parameters

The test scenario comprises of one NR cell and one E-UTRAN cell as given in tables A.16.1.2.6.2-1, A.16.1.2.6.2-2, A.16.1.2.6.2-3 and A.16.1.2.6.2-4. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both NR cell 1 and E-UTRAN cell 2 are already identified by the UE prior to the start of the test. E-UTRAN cell 2 is of lower priority than cell 1.

As specified in the Test Purpose, the UE is configured with the stationary relaxed measurement criterion defined in clause 5.2.4.9.1 in [1]. So, Cell 1 configures the UE as follows:

- *stationaryMobilityEvaluation* [2] criterion is configured according to the parameters listed in Table A.16.1.1.8.2-3;
- *cellEdgeEvaluationWhileStationary* [2] criterion is not configured;
- *combineRelaxedMeasCondition2* [2] is not configured;

Table A.16.1.2.6.2-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, TDD duplex mode
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	LTE 10 MHz bandwidth, FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.1.2.6.2-2: General test parameters for NR to E-UTRAN cell re-selection test case for UE fulfilling stationary criterion for 2 Rx UE

Parameter	Unit	Test configuration	Value	Comment
-----------	------	--------------------	-------	---------

Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE camps on cell 1 in the initial phase, it fulfills stationary criterion, and during T1 period the UE reselects to cell 2
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
T1 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T1
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T2 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	The UE shall perform reselection to cell 1 with higher priority during T2 for iteration of the tests.
	Neighbour cells		1, 2, 3, 4, 5, 6, 7, 8	Cell2	
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	0.64	The value shall be used for all cells in the test.
NR PRACH configuration index			1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
E-UTRAN PRACH configuration index			1, 2, 3, 7	53	As specified in table 5.7.1-2 in TS 36.211 [23]
			4, 5, 6, 8	4	
T1		s	1, 2, 3, 4, 5, 6, 7, 8	35	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2		s	1, 2, 3, 4, 5, 6, 7, 8	35	T2 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.16.1.2.6.2-3: Cell specific test parameters for NR cell 1 for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1	
			T1	T2
TDD configuration		1, 4, 7, 8	N/A	
		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
PDSCH RMC configuration		1, 4, 7, 8	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
RMSI CORESET RMC configuration		1, 4, 7, 8	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4, 7, 8	CCR.1.1 FDD	
		2, 5	CCR.1.1 TDD	
		3, 6	CCR.2.1 TDD	
SSB configuration		1, 4, 7, 8	SSB.1 FR1	
		2, 5	SSB.1 FR1	
		3, 6	SSB.2 FR1	
SMTC configuration		1, 4, 7, 8	SMTC.2	
		2, 5	SMTC.1	
		3, 6	SSB.1 RedCap FR1	
OCNG Pattern		1, 2, 3, 4, 5, 6, 7, 8	OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB	
Qrxlevmin	dBm/SCS	1, 2, 4, 5	-140	
		3, 6	-137	
		1, 4, 7, 8	-98	
N_{oc}	dBm/SCS	2, 5	-98	
		3, 6	-95	

N_{oc}	dBm/15 kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
SS-RSRP	dBm/SCS	1, 4, 7, 8	-102	-86
		2, 5	-102	-86
		3, 6	-99	-83
$\hat{E}_s/I_{ot}$	dB	1, 4, 7, 8	-4	12
		2, 5		
		3, 6		
$\hat{E}_s/N_{oc}$	dB	1, 4, 7, 8	-4	12
		2, 5		
		3, 6		
Io	dBm/9.36 MHz	1, 4, 7, 8	-68.60	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-57.78
	dBm/18.36 MHz	3, 6	-65.67	-54.85
TreselectionP	S	1, 2, 3, 4, 5, 6, 7, 8	0	
Snonintrasearch	dB	1, 2, 3, 4, 5, 6, 7, 8	50	
Thresh _{x, highP}	dB	1, 2, 3, 4, 5, 6, 7, 8	48	
Thresh _{serving, lowP}	dB	1, 2, 3, 4, 5, 6, 7, 8	44	
Thresh _{x, lowP} (Note 2)	dB	1, 2, 3, 4, 5, 6, 7, 8	50	
S _{SearchDeltaP-Stationary}	dB	1, 2, 3, 4, 5, 6, 7, 8	3	
T _{SearchDeltaP-Stationary}	s	1, 2, 3, 4, 5, 6, 7, 8	5	
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: This refers to the value of Thresh _{x, low} which is included in NR system information, and is a threshold for the E-UTRA target cell				

Table A.16.1.2.6.2-4: Cell specific test parameters for E-UTRA cell 2 for 2 Rx UE

Parameter	Unit	Cell 2	
		T1	T2
E-UTRA RF Channel number		1	
BW _{channel}	MHz	10	
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 TDD for test configuration 1, 2, 3; OP.2 FDD for test configuration 4, 5, 6	
PBCH_RA	dB	0	
PBCH_RB	dB		
PSS_RA	dB		
SSS_RA	dB		
PCFICH_RB	dB		
PHICH_RA	dB		
PHICH_RB	dB		
PDCCH_RA	dB		
PDCCH_RB	dB		
PDSCH_RA	dB		
PDSCH_RB	dB		
OCNG_RA ^{Note 1}	dB		
OCNG_RB ^{Note 1}	dB		
Q _{rxlevmin}	dBm	-140	
N_{oc}	dBm/15 kHz	-98	
RSRP	dBm/15 KHz	-84	-84
$\hat{E}_s / I_{ot}$	dB	14	14
$\hat{E}_s / N_{oc}$	dB	14	14

Treselection _{EUTRAN}	S	0
Snonintrasearch	dB	Not sent
Thresh _{x, high} (Note 2)	dB	48
Thresh _{serving, low}	dB	44
Thresh _{x, low}	dB	50
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: This refers to the value of Thresh _{x, high} which is included in E-UTRA system information, and is a threshold for the NR target cell		

A.16.1.2.6.3 Test Requirements

The cell reselection delay to a lower priority E-UTRAN cell with UE fulfilling stationary relaxed measurement criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 2, and starts to send preambles on the PRACH for sending the *RRCCConnectionRequest* message to perform a Tracking Area Update procedure on cell 2.

The cell re-selection delay to a lower priority cell shall be less than 32 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a lower priority cell can be expressed as: $T_{\text{evaluate,EUTRAN_Relax}} + T_{\text{SI-E-UTRA}}$,

Where:

$T_{\text{evaluate,EUTRAN_Relax}}$ See Table 4.2B.2.11.2-1 in clause 4.2B.2.11.2

$T_{\text{SI-E-UTRA}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of $30.72 (T_{\text{evaluate,EUTRAN_Relax}}) + 1.28 (T_{\text{SI-E-UTRA}}) = 32$ s for the cell re-selection delay to a lower priority E-UTRAN cell for stationary relaxed measurement criterion.

A.16.2 SA: RRC_INACTIVE state mobility for RedCap

A.16.2.1 Configured Grant based Small Data Transmissions (CG-SDT) for RedCap

A.16.2.1.1 NR UE CG-SDT Test in FR1 for 1Rx RedCap UE

A.16.2.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE properly perform TA validation for CG-SDT transmission in clause 5.2B.3. The test includes two sub-tests, Sub-test#1 for testing valid TA where UE can initiate CG-SDT transmission, and Sub-test#2 for testing invalid TA where UE does not initiate CG-SDT transmission. Subtest#2 is only tested if Sub-test#1 is passed. For each sub-test, UE is configured with CG-SDT configurations when entering RRC Inactive state. Sub-test#1 consists of four successive time periods, with time duration of T1, T2, T3 and T4 respectively. Sub-test#2 consists of two successive time periods, with time duration of T5 and T6 respectively. There is one cell, which is the active NR cell in FR1. Figure A.16.2.1.1.1-1 shows the variation of the RSRP over the duration of Sub-test#1 and Figure A.16.2.1.1.1-2 shows the variation of the RSRP over the duration of Sub-test#2.

In Sub-test#1:

Prior to the time point TA, the UE shall be fully synchronized to PCell (Cell 1), be registered to the cell and have entered RRC connected mode.

Before starting the test at time point TA, test equipment configures RSRP to P0.

At time point TB, RSRP is changed from P0 to P1.

At time point TC, which is W1 after time point TB, UE expect to receive RRC release with CG-SDT configuration and RRC status is changed to INACTIVE status.

At time point TD, RSRP is changed from P1 to P0.

At time point TE, RSRP is changed from P0 to P2. TE must be W2 before TF.

Test equipment triggers UL data arrival at UE lower layer at time point TF. After time point TF, test equipment observes whether UE transmits with CG-SDT no later than TG which is W3 after TF.

After time point TG, RRC status is changed from RRC INACTIVE to RRC CONNECTED.

In Sub-test#2:

Prior to the time point TA, the UE shall pass Sub-test#1 and have entered RRC connected mode. Otherwise, Sub-test#2 shall not be executed.

From time point TA to time point TD, RSRP is set to P2.

At time point TC, which is W1 after time point TB, UE expect to receive RRC release with CG SDT configuration and RRC status is changed to INACTIVE status.

At time point TD, RSRP is changed from P2 to P0.

Test equipment triggers UL data arrival at UE lower layer at time point TF. TF is 3360ms after TD. After time point TF, test equipment observes whether UE transmits with CG-SDT no later than TG which is W3 after TF.

W1 equals to 640ms and W2 equals to 640ms based on requirements in clause 5.2B.2.1. W3 is 860ms.

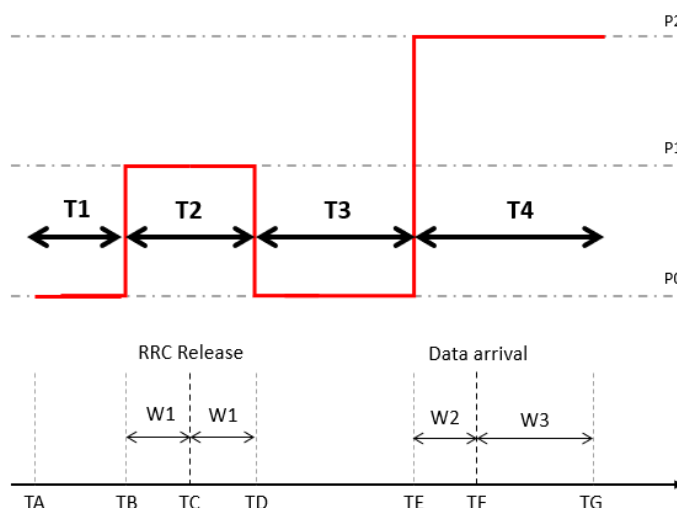


Figure A.16.2.1.1.1-1: RSRP variation model for CG-SDT Sub-test#1

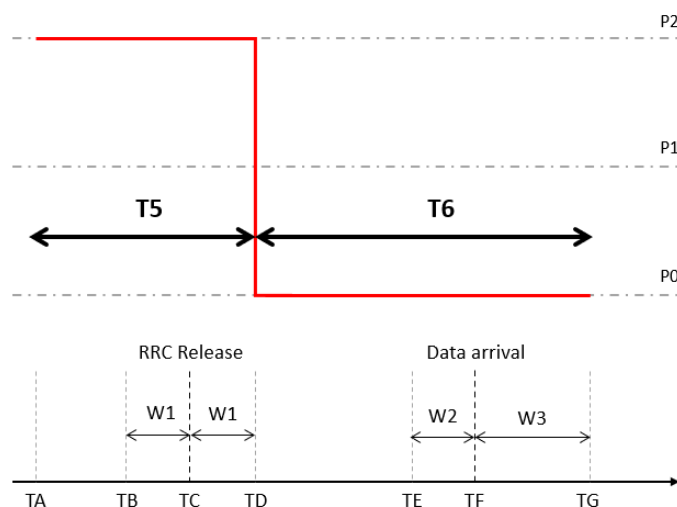


Figure A.16.2.1.1.1-2: RSRP variation model for CG-SDT Sub-test#2

A.16.2.1.1.2 Test Parameters

Supported test configurations are shown in Table A.16.2.1.1.2-1. The test parameters for the PCell are given in Table A.16.2.1.1.2-2 and Table A.16.2.1.1.2-3.

Table A.16.2.1.1.2-1: NR configuration for FR1 SSB

Config	Description
1	NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	NR HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz

Note: The UE is only required to be tested in one of the supported test configurations

Table A.16.2.1.1.2-2: General test parameters

Parameter	Unit	Value	Comment
Duplex mode	Config 1	FDD	
	Config 2, 3	TDD	
	Config 4	HD-FDD	
TDD Configuration	Config 1	N/A	
	Config 2	TDDConf.1.1	
	Config 3	TDDConf.2.1	
	Config 4	N/A	
BW _{channel}	Config 1, 2, 4	MHz	10: N _{RB,c} = 52
	Config 3		20: N _{RB,c} = 51
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD

	Config 3		CCR.2.2 TDD	
SSB configuration	Config 1		SSB.1 FR1	
	Config 2, 4		SSB.1 FR1	
	Config 3		SSB. 1 RedCap FR1	
OCNG Patterns			OP.1	
Initial BWP Configuration	Config 1, 2, 3, 4		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1 ULBWP.1.1	
SMTC configuration	Config 1, 2, 4		SMTC.1	
	Config 3		SMTC.1	
DRX configuration	Config 1, 2, 3, 4	ms	640	
T_delay_modeB	Config 1, 2, 3, 4	s	[4]	
T1	Config 1, 2, 3, 4	s	0.4	
T2	Config 1, 2, 3, 4	s	1.28	2 x W1
T3	Config 1, 2, 3, 4	s	2.72	T_timer_modeB - W1 - W2
T4	Config 1, 2, 3, 4	s	1.5	W2+W3
T5	Config 1, 2, 3, 4	s	1.68	T1+T2
T6	Config 1, 2, 3, 4	s	4.22	T3+W2+W3
cg-SDT-RSRP-ChangeThreshold	Config 1, 2, 3, 4	dB	8	
cg-SDT-RSRP-ThresholdSSB	Config 1, 2, 3, 4	dBm	– 110	
cg-SDT-TimeAlignmentTime	Config 1, 2, 3, 4		Infinity	
CG-SDT resource period	Config 1, 2, 3, 4	ms	320ms	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
Propagation condition	Config 1, 2, 3, 4		AWGN	

Table A.16.2.1.1.2-3: SSB specific test parameters

Parameter	Config	Unit	SSB#0					
			T1	T2	T3	T4	T5	T6
N_{oc} ^{Note1}	1, 2, 3, 4	dBm/15kHz	-100					
N_{oc} ^{Note1}	1, 2, 4	dBm/SSB SCS	-100					
	3	dBm/SSB SCS	-97					
$\hat{E}_s/I_{ot}$	1, 2, 3, 4	dB	0	12	0	14	14	0
SS RSRP ^{Note2}	1, 2, 4	dBm/SSB SCS	-100	-88	-100	-86	-86	-100
	3	dBm/SSB SCS	-97	-85	-97	-83	-83	-97

I_o ^{Note2}	1, 2, 4	dBm/ 9.36 MHz	-69.04	-59.78	-69.04	-57.88	-57.88	-69.04
	3	dBm/ 18.36 MHz	-66.11	-56.86	-66.11	-54.95	-54.95	-66.11
$\hat{E}_s / N_{oc}$	1, 2, 3, 4	dB	0	12	0	14	14	0
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								

A.16.2.1.1.3 Test requirements

The UE behaviour in each test during time durations shall be as follows:

During Sub-test#1, UE shall transmit PUSCH at CG-SDT resource within 860ms after time point TF.

During Sub-test#2, after passing Sub-test#1, UE shall not transmit PUSCH at CG-SDT resources after TF until the end of the test at time point TG.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.2.1.2 NR UE CG-SDT Test in FR1 for 2Rx RedCap UE

A.16.2.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE properly perform TA validation for CG-SDT transmission in clause 5.2B.3. The test includes two sub-tests, Sub-test#1 for testing valid TA where UE can initiate CG-SDT transmission, and Sub-test#2 for testing invalid TA where UE does not initiate CG-SDT transmission. Sub-test#2 is only tested if Sub-test#1 is passed. For each sub-test, UE is configured with CG-SDT configurations when entering RRC Inactive state. Sub-test#1 consists of four successive time periods, with time duration of T1, T2, T3 and T4 respectively. Sub-test#2 consists of two successive time periods, with time duration of T5 and T6 respectively. There is one cell, which is the active NR cell in FR1. Figure A.16.2.1.2.1-1 shows the variation of the RSRP over the duration of Sub-test#1 and Figure A.16.2.1.2.1-2 shows the variation of the RSRP over the duration of Sub-test#2.

In Sub-test#1:

Prior to the time point TA, the UE shall be fully synchronized to PCell (Cell 1), be registered to the cell and have entered RRC connected mode.

Before starting the test at time point TA, test equipment configures RSRP to P0.

At time point TB, RSRP is changed from P0 to P1.

At time point TC which is W1 after time point TB, UE expect to receive RRC release with CG-SDT configuration and RRC status is changed to INACTIVE status.

At time point TD, RSRP is changed from P1 to P0.

At time point TE, RSRP is changed from P0 to P2. TE must be W2 before TF.

Test equipment triggers UL data arrival at UE lower layer at time point TF. After time point TF, test equipment observes whether UE transmits with CG-SDT no later than TG which is W3 after TF.

After time point TG, RRC status is changed from RRC INACTIVE to RRC CONNECTED.

In Sub-test#2:

Prior to the time point TA, the UE shall pass Sub-test#1 and have entered RRC connected mode. Otherwise, Sub-test#2 shall not be executed.

From time point TA to time point TD, RSRP is set to P2.

At time point TC, which is W1 after time point TB, UE expect to receive RRC release with CG SDT configuration and RRC status is changed to INACTIVE status.

At time point TD, RSRP is changed from P2 to P0.

Test equipment triggers UL data arrival at UE lower layer at time point TF. TF is 3360ms after TD. After time point TF, test equipment observes whether UE transmits with CG-SDT no later than TG which is W3 after TF.

W1 equals to 640ms and W2 equals to 640ms based on requirements in clause 5.2B.2.1. W3 is 860ms.

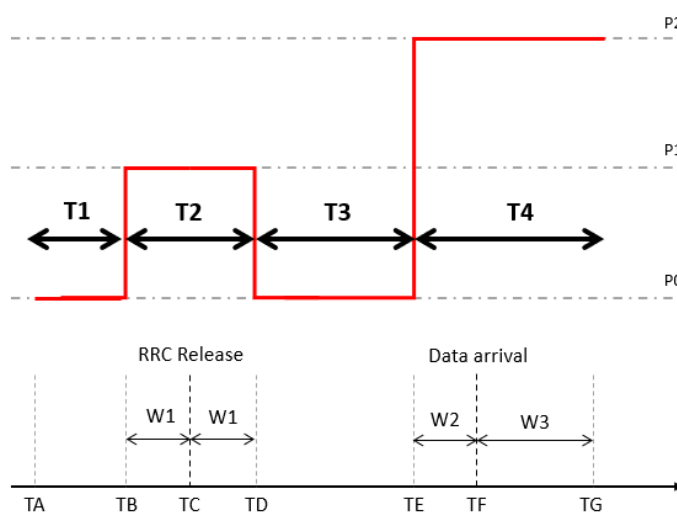


Figure A.16.2.1.2.1-1: RSRP variation model for CG-SDT Sub-test#1

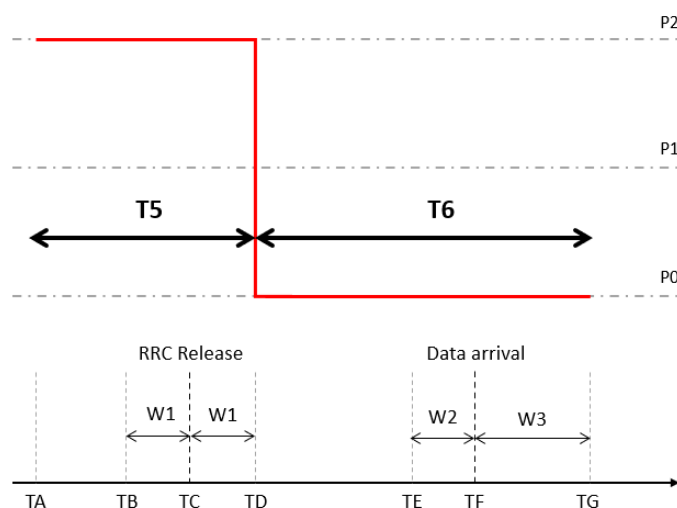


Figure A.16.2.1.2.1-2: RSRP variation model for CG-SDT Sub-test#2

A.16.2.1.2.2 Test Parameters

Supported test configurations are shown in Table A.16.2.1.2.2-1. The test parameters for the PCell are given in Table A.16.2.1.2.2-2 and Table A.16.2.1.2.2-3.

Table A.16.2.1.2.2-1: NR configuration for FR1 SSB

Config	Description
1	NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	NR HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.2.1.2.2-2: General test parameters

Parameter		Unit	Value	Comment
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
TDD Configuration	Config 1		N/A	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
	Config 4		N/A	
BW _{channel}	Config 1, 2, 4	MHz	10: N _{RB,c} = 52	
	Config 3		20: N _{RB,c} = 51	
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD	
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD	
	Config 2		CCR.1.3 TDD	
	Config 3		CCR.2.2 TDD	
SSB configuration	Config 1		SSB.1 FR1	
	Config 2, 4		SSB.1 FR1	
	Config 3		SSB. 1 RedCap FR1	
OCNG Patterns			OP.1	
Initial BWP Configuration	Config 1, 2, 3, 4		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1 ULBWP.1.1	
SMTC configuration	Config 1, 2, 4		SMTC.1	
	Config 3		SMTC.1	
DRX configuration	Config 1, 2, 3, 4	ms	640	
T _{delay_modeB}	Config 1, 2, 3, 4	s	4	
T1	Config 1, 2, 3, 4	s	0.4	
T2	Config 1, 2, 3, 4	s	1.28	2 x W1
T3	Config 1, 2, 3, 4	s	2.72	T _{timer_modeB} - W1 - W2
T4	Config 1, 2, 3, 4	s	1.5	W2+W3
T5	Config 1, 2, 3, 4	s	1.68	T1+T2
T6	Config 1, 2, 3, 4	s	4.22	T3+W2+W3
cg-SDT-RSRP-ChangeThreshold	Config 1, 2, 3, 4	dB	8	
cg-SDT-RSRP-ThresholdSSB	Config 1, 2, 3, 4	dBm	– 110	

cg-SDT-TimeAlignmentTime			Infinity	
CG-SDT resource period		ms	320ms	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
Propagation condition	Config 1, 2, 3, 4		AWGN	

Table A.16.2.1.2.2-3: SSB specific test parameters

Parameter	Config	Unit	SSB#0					
			T1	T2	T3	T4	T5	T6
N_{oc} ^{Note1}	1, 2, 3, 4	dBm/15kHz	-100					
N_{oc} ^{Note1}	1, 2, 4	dBm/SSB SCS	-100					
	3	dBm/SSB SCS	-97					
$\hat{E}_s/I_{ot}$	1, 2, 3, 4	dB	0	12	0	14	14	0
SS RSRP ^{Note2}	1, 2, 4	dBm/SSB SCS	-100	-88	-100	-86	-86	-100
	3	dBm/SSB SCS	-97	-85	-97	-83	-83	-97
I_o ^{Note2}	1, 2, 4	dBm/ 9.36 MHz	-69.04	-59.78	-69.04	-57.88	-57.88	-69.04
	3	dBm/ 18.36 MHz	-66.11	-56.86	-66.11	-54.95	-54.95	-66.11
$\hat{E}_s/N_{oc}$	1, 2, 3, 4	dB	0	12	0	14	14	0

Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.2.1.2.3 Test requirements

The UE behaviour in each test during time durations shall be as follows:

During Sub-test#1, UE shall transmit PUSCH at CG-SDT resource within 860ms after time point TF.

During Sub-test#2, after passing Sub-test#1, UE shall not transmit PUSCH at CG-SDT resources after TF until the end of the test at time point TG.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.3 RRC_CONNECTED state mobility for RedCap

A.16.3.1 Handover

A.16.3.1.1 Intra-frequency handover from FR1 to FR1; known target cell for 1 Rx UE

A.16.3.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements for 1 Rx RedCap UE specified in clause 6.1D.1.2.

A.16.3.1.1.2 Test Parameters

Supported test configurations are shown in table A.16.3.1.1.2-1. Both handover delay and interruption length are tested by using the parameters in table A.16.3.1.1.2-2, and A.16.3.1.1.2-3.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

NR shall send a RRC message implying handover to cell 2, then UE handover to cell 2's initial BWP associated with CD-SSB. The RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.16.3.1.1.2-1: Intra-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.1.2-2: General test parameters Intra-frequency handover from FR1 to FR1

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
A3-Offset	dB	0	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 5	
T3	s	1	

Table A.16.3.1.1.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter	Unit	Cell 1	Cell 2
-----------	------	--------	--------

			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		20: N _{RB,c} = 51					
BWP BW	Config 1,4	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		20: N _{RB,c} = 51					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD					
	Config 2		SR.1.1 TDD					
	Config 3		SR2.1 TDD					
CORESET Reference Channel	Config 1,4		CR.1.1 FDD					
	Config 2		CR.1.1 TDD					
	Config 3		CR2.1 TDD					
TRS configuration	Config 1,4		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
OCNG Patterns			OP.1					
SMTc Configuration			SMTc.1					
SSB Configuration	Config 1,2,4		SSB.1 FR1			SSB.1 FR1		
	Config 3		SSB.1 RedCap FR1			SSB.1 RedCap FR1		
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30 kHz					
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30 kHz					
PRACH configuration			FR1 PRACH configuration 1					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS		dB	0					
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N _{oc} ^{Note2}		dBm/15kHz _z	-98					
N _{oc} ^{Note2}	Config 1,2,4	dBm/SCS	-98					
	Config 3		-95					
Ê _s /I _{ot}		dB	8	-3.3	-3.3	-	2.36	2.36
			Infinity					

$\hat{E}_s / N_{oc}$		dB	8	8	8	- Infinity	11	11
SSB_RP	Config 1,2,4	dBm/SCS	-90	-90	-90	- Infinity	-87	-87
	Config 3	dBm/SCS	-87	-87	-87	- Infinity	-84	-84
Io ^{Note3}	Config 1,2,4	dBm/ 9.36MHz	-61.41	-57.06	-57.06	-61.41	-57.06	-57.06
	Config 3	dBm/ 18.36MHz	-58.49	-54.14	-54.14	-58.49	-54.14	-54.14
Propagation condition		-	AWGN			AWGN		
Antenna Configuration			1x1					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								

A.16.3.1.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + T_{interrupt}, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

T_{interrupt} = 62 ms in the test. T_{interrupt} is defined in clause 6.1D.1.2.

This gives a total of 72 ms.

A.16.3.1.2 Intra-frequency handover from FR1 to FR1; known target cell for 2 Rx UE

A.16.3.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements or 1 Rx RedCap UE specified in clause 6.1D.1.2.

A.16.3.1.2.2 Test Parameters

Supported test configurations are shown in table A.16.3.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.16.3.1.2.2-2, and A.16.3.1.2.2-3.

The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE may not have any timing information of cell 2.

NR shall send a RRC message implying handover to cell 2, then UE handover to cell 2's initial BWP associated with CD-SSB. The RRC message implying handover shall be sent to the UE during period T2, after the UE has reported Event A3. T3 is defined as the end of the last TTI containing the RRC message implying handover.

Table A.16.3.1.2.2-1: Intra-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode

3	Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.2.2-2: General test parameters Intra-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
A3-Offset		dB	0	
Hysteresis		dB	0	
Time To Trigger		s	0	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μ s	Synchronous cells
T1		s	5	
T2		s	≤ 5	
T3		s	1	

Table A.16.3.1.2.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
NR RF Channel Number			1			1		
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4							
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		20: N _{RB,c} = 51					
BWP BW	Config 1,4	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		20: N _{RB,c} = 51					
DRx Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD					
	Config 2		SR.1.1 TDD					
	Config 3		SR2.1 TDD					
CORESET Reference Channel	Config 1,4		CR.1.1 FDD					
	Config 2		CR.1.1 TDD					
	Config 3		CR2.1 TDD					
TRS configuration	Config 1,4		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
OCNG Patterns			OP.1					
SMTc Configuration			SMTc.1 RedCap					
SSB Configuration	Config 1,2,4		SSB.1 FR1			SSB.1 FR1		
	Config 3		SSB.1 RedCap FR1			SSB.1 RedCap FR1		

PDSCH/PDCCH subcarrier spacing		Config 1,2,4	kHz	15 kHz					
		Config 3		30 kHz					
PUCCH/PUSCH subcarrier spacing		Config 1,2,4	kHz	15 kHz					
		Config 3		30 kHz					
PRACH configuration				FR1 PRACH configuration 1					
BWP configuration		Initial DL BWP		DLBWP.0.1					
		Dedicated DL BWP		DLBWP.1.1					
		Initial UL BWP		ULBWP.0.1					
		Dedicated UL BWP		ULBWP.1.1					
EPRE ratio of PSS to SSS			dB	0					
EPRE ratio of PBCH DMRS to SSS									
EPRE ratio of PBCH to PBCH DMRS									
EPRE ratio of PDCCH DMRS to SSS									
EPRE ratio of PDCCH to PDCCH DMRS									
EPRE ratio of PDSCH DMRS to SSS									
EPRE ratio of PDSCH to PDSCH									
EPRE ratio of OCNG DMRS to SSS(Note 1)									
EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc}^{Note2}			dBm/15kHz	-98					
N_{oc}^{Note2}	Config 1,2,4		dBm/SCS	-98					
	Config 3			-95					
$\hat{E}_s / I_{ot}$			dB	8	-3.3	-3.3	-Infinity	2.36	2.36
$\hat{E}_s / N_{oc}$			dB	8	8	8	-Infinity	11	11
SSB_RP	Config 1,2,4		dBm/SCS	-90	-90	-90	-Infinity	-87	-87
	Config 3		dBm/SCS	-87	-87	-87	-Infinity	-84	-84
I_o^{Note3}	Config 1,2,4		dBm/9.36MHz	-61.41	-57.06	-57.06	-61.41	-57.06	-57.06
	Config 3		dBm/18.36MHz	-58.49	-54.14	-54.14	-58.49	-54.14	-54.14
Propagation condition			-	AWGN			AWGN		
Antenna Configuration				1x2					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.									
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.									
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.									

A.16.3.1.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 72 ms from the beginning of time period T3.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 62 ms in the test. $T_{interrupt}$ is defined in clause 6.1D.1.2.

This gives a total of 72 ms.

A.16.3.1.3 Intra-frequency handover from FR1 to FR1; unknown target cell for 1 Rx UE

A.16.3.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements for 1Rx RedCap UE as specified in clause 6.1D.1.2.

A.16.3.1.3.2 Test Parameters

Supported test configurations are shown in table A.16.3.1.3.2-1. Both handover delay and interruption length are tested by using the parameters in table A.16.3.1.3.2-2, and A.16.3.1.3.2-3.

Before the test starts,

- UE is connected to Cell 1 with active DL BWP and active UL BWP;
- UE is configured with nonCellDefiningSSB-r17 under BWP-DownlinkDedicated which serves as the reference SSB for the serving cell. The nonCellDefiningSSB-r17 corresponds to the NCD-SSB within the active DL BWP.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network indicating the UE to handover to cell 2 with *firstActiveDownlinkBWP-Id* configured to DL BWP and *firstActiveUplinkBWP-Id* configured to UL BWP. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.16.3.1.3.2-1: Intra-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.3.2-2: General test parameters Intra-frequency handover from FR1 to FR1

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 5	

Table A.16.3.1.3.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
	Config 4		HD-FDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf. 2.1			
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		20: N _{RB,c} = 51			
BWP BW	Config 1,4	MHz	10: N _{RB,c} = 25			
	Config 2		10: N _{RB,c} = 25			
	Config 3		20: N _{RB,c} = 25			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
TRS configuration	Config 1, 4		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC configuration for CD-SSB			SMTC.1			
SMTC configuration for NCD-SSB			SMTC.2 RedCap			
CD-SSB Configuration	Config 1,2,4		SSB.1 FR1			
	Config 3		SSB.1 RedCap FR1			
NCD-SSB Configuration	Config 1,2,4		SSB.6 RedCap FR1 (Note 1)			
	Config 3		SSB.7 RedCap FR1 (Note 1)			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1 RedCap (Note 2)		DLBWP.1.1 RedCap (Note 2)	
	Initial UL BWP		ULBWP.0.1		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1 RedCap (Note 3)		ULBWP.1.1 RedCap (Note 3)	
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 4)						

EPRE ratio of OCNG to OCNG DMRS (Note 4)						
N_{oc}^{Note5}		dBm/15kHz	-98			
N_{oc}^{Note5}	Config 1,2,4	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s / I_{ot}$		dB	8	-0.64	-Infinity	-0.64
$\hat{E}_s / N_{oc}$		dB	8	8	-Infinity	8
SSB_RP	Config 1,4	dBm/SCS	-90	-90	-Infinity	-90
	Config 2	dBm/SCS	-90	-90	-Infinity	-90
	Config 3	dBm/SCS	-87	-87	-Infinity	-87
I_o^{Note6}	Config 1,2,4	dBm/ 9.36MHz	-61.41	-58.71	-61.41	-58.71
	Config 3	dBm/ 18.36MHz	-58.48	-55.78	-58.48	-55.78
Propagation condition		-	AWGN		AWGN	
Antenna Configuration			1x1		1x1	
Note 1:	NCD-SSB is configured within dedicated RedCap DL BWP and CD-SSB is configured completely outside the dedicated RedCap DL BWP.					
Note 2:	The starting PRB index for dedicated DL BWP corresponding to NCD-SSB PRB index.					
Note 3:	The starting PRB index for dedicated UL BWP is the same as the dedicated DL BWP corresponding to NCD-SSB PRB index.					
Note 4:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 5:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 6:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.16.3.1.3.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 292 ms from the beginning of time period T2. The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 282 ms in the test. $T_{interrupt}$ is defined in clause 6.1.1.2.2 and T_{search} defined in clause 6.1D.1.2.

This gives a total of 292 ms.

A.16.3.1.4 Intra-frequency handover from FR1 to FR1; unknown target cell for 2 Rx UE

A.16.3.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 intra frequency handover requirements for 2Rx RedCap UE as specified in clause 6.1D.1.2.

A.16.3.1.4.2 Test Parameters

Supported test configurations are shown in table A.16.3.1.4.2-1. Both handover delay and interruption length are tested by using the parameters in table A.16.3.1.4.2-2, and A.16.3.1.4.2-3.

Before the test starts,

- UE is connected to Cell 1 with active DL BWP and active UL BWP
- UE is configured with nonCellDefiningSSB-r17 under BWP-DownlinkDedicated which serves as the reference SSB for the serving cell. The nonCellDefiningSSB-r17 corresponds to the NCD-SSB within the active DL BWP.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network indicating the UE to handover to cell 2 with *firstActiveDownlinkBWP-Id* configured to DL BWP and *firstActiveUplinkBWP-Id* configured to UL BWP. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.16.3.1.4.2-1: Intra-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.4.2-2: General test parameters Intra-frequency handover from FR1 to FR1

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 5	

Table A.16.3.1.4.2-3: Cell specific test parameters for NR FR1-FR1 Intra frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
	Config 4		HD-FDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf. 2.1			
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		20: N _{RB,c} = 51			
BWP BW	Config 1,4	MHz	10: N _{RB,c} = 25			
	Config 2		10: N _{RB,c} = 25			
	Config 3		20: N _{RB,c} = 25			

DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1, 4		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
TRS configuration	Config 1, 4		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
OCNG Patterns			OP.1			
SMTC configuration for CD-SSB			SMTC.1			
SMTC configuration for NCD-SSB			SMTC.2 RedCap			
CD-SSB Configuration	Config 1,2,4		SSB.1 FR1			
	Config 3		SSB.1 RedCap FR1			
NCD-SSB Configuration	Config 1,2,4		SSB.6 RedCap FR1 (Note 1)			
	Config 3		SSB.7 RedCap FR1 (Note 1)			
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1 RedCap (Note 2)		DLBWP.1.1 RedCap (Note 2)	
	Initial UL BWP		ULBWP.0.1		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1 RedCap (Note 3)		ULBWP.1.1 RedCap (Note 3)	
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 4)						
EPRE ratio of OCNG to OCNG DMRS (Note 4)						
N_{oc}^{Note5}		dBm/15kHz	-98			
N_{oc}^{Note5}	Config 1,2,4	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s/I_{ot}$		dB	8	-0.64	-Infinity	-0.64
$\hat{E}_s/N_{oc}$		dB	8	8	-Infinity	8
SSB_RP	Config 1,4	dBm/SCS	-90	-90	-Infinity	-90
	Config 2	dBm/SCS	-90	-90	-Infinity	-90
	Config 3	dBm/SCS	-87	-87	-Infinity	-87
I_o^{Note6}	Config 1,2,4	dBm/9.36MHz	-61.41	-58.71	-61.41	-58.71
	Config 3	dBm/18.36MHz	-58.48	-55.78	-58.48	-55.78
Propagation condition		-	AWGN		AWGN	
Note 1: NCD-SSB is configured within dedicated RedCap DL BWP and CD-SSB is configured completely outside the dedicated RedCap DL BWP.						

Note 2:	The starting PRB index for dedicated DL BWP corresponding to NCD-SSB PRB index.
Note 3:	The starting PRB index for dedicated UL BWP is the same as the dedicated DL BWP corresponding to NCD-SSB PRB index..
Note 4:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 5:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 6:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

The UE shall start to transmit the PRACH to Cell 2 less than 212 ms from the beginning of time period T2. The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{\text{interrupt}}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{\text{interrupt}}$ = 202 ms in the test. $T_{\text{interrupt}}$ is defined in clause 6.1.1.2.2 and T_{search} defined in clause 6.1D.1.2.

This gives a total of 212 ms.

A.16.3.1.5 Inter-frequency handover from FR1 to FR1; unknown target cell for 1 Rx UE

A.16.3.1.5.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 inter frequency handover requirements for 1 Rx RedCap UE as specified in clause 6.1D.1.2.

A.16.3.1.5.2 Test Parameters

Supported test configurations are shown in table A.16.3.1.5.2-1. Both handover delay and interruption length are tested by using the parameters in table A.16.3.1.5.2-2, and A.16.3.1.5.2-3.

Before the test starts,

- UE is connected to Cell 1 with active DL BWP and active UL BWP;
- UE is not configured with *nonCellDefiningSSB-r17* under *BWP-DownlinkDedicated*, and CD-SSB serves as the reference SSB for the serving cell.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network indicating the UE to handover to Cell 2 with *firstActiveDownlinkBWP-Id* configured to DL BWP and *firstActiveUplinkBWP-Id* configured to UL BWP, where cell 2's DL BWP is the Redcap specific BWP associated with NCD-SSB. The UE then performs handover from cell 1's active DL BWP associated with the CD-SSB to cell 2's Redcap specific BWP associated with NCD-SSB. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.16.3.1.5.2-1: Inter-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.5.2-2: General test parameters Inter-frequency handover from FR1 to FR1

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
T1		s	5	
T2		s	≤5	

Table A.16.3.1.5.2-3: Cell specific test parameters for NR FR1-FR1 Inter frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
	Config 4		HD-FDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		20: N _{RB,c} = 51			
BWP BW	Config 1,4	MHz	10: N _{RB,c} = 25			
	Config 2		10: N _{RB,c} = 25			
	Config 3		20: N _{RB,c} = 25			
TRS configuration	Config 1,4		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1,4		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
OCNG Patterns			OP.1			
SMTC configuration for CD-SSB			SMTC.1			
SMTC configuration for NCD-SSB			SMTC.2 RedCap			
CD-SSB Configuration	Config 1,2,4		SSB.1 FR1		N/A	
	Config 3		SSB.1 RedCap FR1		N/A	
NCD-SSB Configuration	Config 1,2,4		N/A		SSB.6 RedCap FR1 (Note 4)	
	Config 3		N/A		SSB.7 RedCap FR1 (Note 4)	

PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
PRACH configuration			FR1 PRACH configuration 1			
BWP	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1 RedCap (Note 5)		DLBWP.1.1 RedCap (Note 6)	
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		DLBWP.1.1 RedCap (Note 7)		ULBWP.1.1 RedCap (Note 8)	
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}		dBm/15kHz	-98		-98	
N_{oc}^{Note2}	Config 1,2,4	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s/I_{ot}$		dB	4	4	-Infinity	5
$\hat{E}_s/N_{oc}$		dB	4	4	-Infinity	5
SSB_RP	Config 1,2,4	dBm/SCS	-94	-94	-Infinity	-93
	Config 3	dBm/SCS	-91	-91	-Infinity	-90
I_o^{Note3}	Config 1,2,4	dBm/9.36MHz	-64.59	-64.59	-70.05	-63.85
	Config 3	dBm/18.36MHz	-61.67	-61.67	-67.13	-60.93
Propagation condition		-	AWGN		AWGN	
Antenna Configuration			1x1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: NCD-SSB is configured within dedicated RedCap DL BWP.						
Note 5: The starting PRB index for dedicated DL BWP corresponding to CD-SSB PRB index;						
Note 6: The starting PRB index for dedicated DL BWP corresponding to NCD-SSB PRB index;						
Note 7: The starting PRB index for dedicated UL BWP is the same as the dedicated DL BWP corresponding to CD-SSB PRB index;						
Note 8: The starting PRB index for dedicated UL BWP is the same as the dedicated DL BWP corresponding to NCD-SSB PRB index;						

A.16.3.1.5.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 532 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupts}$ where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{\text{interrupt}} = 522$ ms in the test. $T_{\text{interrupt}}$ is defined in clause 6.1D.1.2.

This gives a total of 532 ms.

A.16.3.1.6 Inter-frequency handover from FR1 to FR1; unknown target cell for 2 Rx UE

A.16.3.1.6.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR1-NR FR1 inter frequency handover requirements for 2 Rx RedCap UE as specified in clause 6.1D.1.2.

A.16.3.1.6.2 Test Parameters

Supported test configurations are shown in table A.16.3.1.6.2-1. Both handover delay and interruption length are tested by using the parameters in table A.16.3.1.6.2-2, and A.16.3.1.6.2-3.

Before the test starts,

- UE is connected to Cell 1 with active DL BWP and active UL BWP;
- UE is not configured with *nonCellDefiningSSB-r17* under *BWP-DownlinkDedicated*, and CD-SSB serves as the reference SSB for the serving cell.

The test scenario comprises of two carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network indicating the UE to handover to Cell 2 with *firstActiveDownlinkBWP-Id* configured to DL BWP and *firstActiveUplinkBWP-Id* configured to UL BWP, where cell 2's DL BWP is the Redcap specific BWP associated with NCD-SSB. The UE then performs handover from cell 1's active DL-BWP associated with the CD-SSB to cell 2's Redcap specific BWP associated with NCD-SSB. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.16.3.1.6.2-1: Inter-frequency handover from FR1 to FR1 test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.6.2-2: General test parameters Inter-frequency handover from FR1 to FR1

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
T1	s	5	

T2	s	≤5	
----	---	----	--

Table A.16.3.1.6.2-3: Cell specific test parameters for NR FR1-FR1 Inter frequency handover test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
	Config 4		HD-FDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		20: N _{RB,c} = 51			
BWP BW	Config 1,4	MHz	10: N _{RB,c} = 25			
	Config 2		10: N _{RB,c} = 25			
	Config 3		20: N _{RB,c} = 25			
TRS configuration	Config 1,4		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR.2.1 TDD			
CORESET Reference Channel	Config 1,4		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
OCNG Patterns			OP.1			
SMTTC configuration for CD-SSB			SMTTC.1			
SMTTC configuration for NCD-SSB			SMTTC.2 RedCap			
CD-SSB Configuration	Config 1,2,4		SSB.1 FR1		N/A	
	Config 3		SSB.1 RedCap FR1		N/A	
NCD-SSB Configuration	Config 1,2,4		N/A		SSB.6 RedCap FR1 (Note 4)	
	Config 3		N/A		SSB.7 RedCap FR1 (Note 4)	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15			
	Config 3		30			
PRACH configuration			FR1 PRACH configuration 1			
BWP	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1 RedCap (Note 5)		DLBWP.1.1 RedCap (Note 6)	
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		DLBWP.1.1 RedCap (Note 7)		ULBWP.1.1 RedCap (Note 8)	
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						

EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}		dBm/15kHz z	-98		-98	
N_{oc}^{Note2}	Config 1,2,4	dBm/SCS	-98		-98	
	Config 3		-95		-95	
$\hat{E}_s/I_{ot}$		dB	4	4	-Infinity	5
$\hat{E}_s/N_{oc}$		dB	4	4	-Infinity	5
SSB_RP	Config 1,2,4	dBm/SCS	-94	-94	-Infinity	-93
	Config 3	dBm/SCS	-91	-91	-Infinity	-90
I_o^{Note3}	Config 1,2,4	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-63.85
	Config 3	dBm/ 18.36MHz	-61.67	-61.67	-67.13	-60.93
Propagation condition		-	AWGN		AWGN	
Antenna configuration			1x2			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: NCD-SSB is configured within dedicated RedCap DL BWP.						
Note 5: The starting PRB index for dedicated DL BWP corresponding to CD-SSB PRB index;						
Note 6: The starting PRB index for dedicated DL BWP corresponding to NCD-SSB PRB index;						
Note 7: The starting PRB index for dedicated UL BWP is the same as the dedicated DL BWP corresponding to CD-SSB PRB index;						
Note 8: The starting PRB index for dedicated UL BWP is the same as the dedicated DL BWP corresponding to NCD-SSB PRB index;						

A.16.3.1.6.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 372 ms from the beginning of time period T2.
The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 362 ms in the test. $T_{interrupt}$ is defined in clause 6.1D.1.2.

This gives a total of 372 ms.

A.16.3.1.7 SA NR - E-UTRAN handover for 1Rx UE

A.16.3.1.7.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to E-UTRAN handover requirements as specified in clause 6.1D.2.1.

The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of three successive time

periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the next instant after the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.16.3.1.7.1-1. General test parameters are provided in Table A.16.3.1.7.1-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.16.3.1.7.1-3 and A.16.3.1.7.1-4 respectively.

Table A.16.3.1.7.1-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.7.1-2: General test parameters for SA inter-RAT E-UTRAN handover

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell	Cell 1	NR cell
	Neighbouring cell	Cell 2	E-UTRAN cell
Final condition	Active cell	Cell 2	
NR measurement quantity		SS-RSRP	
E-UTRAN measurement quantity		RSRP	
b2-Threshold1	dBm	As specified in Table A.16.3.1.7.1-3	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2EUTRAN	dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure
Time offset between cells		3 ms	Asynchronous cells
Gap pattern configuration Id		0	As specified in Table 9.1.2-1 started before T2 starts
T1	s	5	
T2	s	≤5	
T3	s	1	

Table A.16.3.1.7.1-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter	Unit	Configuration	Cell 1
-----------	------	---------------	--------

			T1	T2	T3	
RF channel number			1, 2, 3, 4, 5, 6,7, 8	1		
Duplex mode			1, 4	FDD		
			2, 3, 5, 6	TDD		
			7, 8	HD-FDD		
TDD Configuration			2, 5	TDDConf.1.1		
			3, 6	TDDConf.2.1		
BW _{channel}		MHz	1, 4, 7, 8	10: N _{RB,c} = 52 (FDD)		
			2, 5	10: N _{RB,c} = 52 (TDD)		
			3, 6	20: N _{RB,c} = 51 (TDD)		
PDSCH reference measurement channel			1, 4, 7, 8	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4, 7, 8	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
TRS configuration			1, 4, 7, 8	TRS.1.1 FDD		
			2, 5	TRS.1.1 TDD		
			3, 6	TRS.1.2 TDD		
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6,7, 8	OP.1		
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3, 4, 5, 6, 7, 8	SMTC.1 RedCap		
SSB configuration			1, 2, 4, 5, 7, 8	SSB.1 FR1		
			3, 6	SSB.1 RedCap FR1		
b2-Threshold1		dBm	1, 2, 4, 5, 7, 8	-96		
			3, 6	-93		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6,7, 8	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N _{oc} ^{Note2}		dBm/15 KHz	1, 2, 3, 4, 5, 6, 7, 8	-100	-104	-100
N _{oc} ^{Note2}		dBm/SCS	1, 2, 4, 5, 7, 8	-100	-104	-100
			3, 6	-97	-101	-97
Ē _s /N _{oc}		dB	1, 2, 3, 4, 5, 6, 7, 8	12	0	0

$\hat{E}_s/I_{ot}$ ^{Note3}	dB	1, 2, 3, 4, 5, 6, 7, 8	12	0	0
SS-RSRP ^{Note3}	dBm/SCS	1, 2, 4, 5, 7, 8	-88	-104	-100
		3, 6	-85	-101	-97
I_o ^{Note3}	dBm/9.36 MHz	1, 2, 4, 5, 7, 8	-59.78	-73.04	-69.04
	dBm/18.36 MHz	3, 6	-56.86	-70.11	-66.11
Propagation condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Table A.16.3.1.7.1-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2		
Duplex mode		1, 2, 3, 7	FDD		
		4, 5, 6, 8	TDD		
TDD special subframe configuration ^{Note1}		4, 5, 6, 8	6		
TDD uplink-downlink configuration ^{Note1}		4, 5, 6, 8	1		
BW _{channel}	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$		
PRACH Configuration ^{Note2}		1, 2, 3, 7	4		
		4, 5, 6, 8	53		
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns ^{Note3}		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0		
PBCH_RB					
PSS_RA					

SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note4}					
OCNG_RB ^{Note4}					
N _{oc} ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98		
Ê _s /N _{oc}	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	8	8
Ê _s /I _{ot} ^{Note6}	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	8	8
RSRP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-90	-90
SCH_RP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-90	-90
I _o ^{Note6}	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-67.21 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].					
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].					
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.					
Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.					
Note 6: Ê _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].					

A.16.3.1.7.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 85 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and $T_{interrupt}$ = 35 ms in the test based on requirements specified in clause 6.1D.2.1.

This gives a total of 85 ms.

A.16.3.1.8 SA NR - E-UTRAN handover for 2Rx UE

A.16.3.1.8.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to E-UTRAN handover requirements as specified in clause 6.1D.2.1.

The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 9.1.2-1 is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the next instant after the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.16.3.1.8.1-1. General test parameters are provided in Table A.16.3.1.8.1-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.16.3.1.8.1-3 and A.16.3.1.8.1-4 respectively.

Table A.16.3.1.8.1-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.8.1-2: General test parameters for SA inter-RAT E-UTRAN handover

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell	Cell 1	NR cell
	Neighbouring cell	Cell 2	E-UTRAN cell
Final condition	Active cell	Cell 2	
NR measurement quantity		SS-RSRP	
E-UTRAN measurement quantity		RSRP	
b2-Threshold1	dBm	As specified in Table A.16.3.1.8.1-3	Absolute NR SS-RSRP threshold for event B2
b2-Threshold2EUTRAN	dBm	-98	Absolute E-UTRAN RSRP threshold for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure
Time offset between cells		3 ms	Asynchronous cells
Gap pattern configuration Id		0	As specified in Table 9.1.2-1 started before T2 starts
T1	s	5	
T2	s	≤5	
T3	s	1	

Table A.16.3.1.8.1-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6,7, 8	1		
Duplex mode			1, 4	FDD		
			2, 3, 5, 6	TDD		
			7, 8	HD-FDD		
TDD Configuration			2, 5	TDDConf.1.1		
			3, 6	TDDConf.2.1		
BW _{channel}		MHz	1, 4, 7, 8	10: N _{RB,c} = 52 (FDD)		
			2, 5	10: N _{RB,c} = 52 (TDD)		
			3, 6	20: N _{RB,c} = 51 (TDD)		
PDSCH reference measurement channel			1, 4,7, 8	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4,7, 8	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
TRS configuration			1, 4,7, 8	TRS.1.1 FDD		
			2, 5	TRS.1.1 TDD		
			3, 6	TRS.1.2 TDD		
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6,7, 8	OP.1		
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3, 4, 5, 6,7, 8	SMTC.1 RedCap		
SSB configuration			1, 2, 4, 5,7, 8	SSB.1 FR1		
			3, 6	SSB.1 RedCap FR1		
b2-Threshold1		dBm	1, 2, 4, 5,7, 8	-96		
			3, 6	-93		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6,7, 8	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N _{oc} ^{Note2}						
N _{oc} ^{Note2}		dBm/SCS	1, 2, 4, 5,7, 8	-100	-104	-100

		3, 6	-97	-101	-97
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	12	0	0
$\hat{E}_s/I_{ot}^{Note3}$	dB	1, 2, 3, 4, 5, 6, 7, 8	12	0	0
SS-RSRP ^{Note3}	dBm/SCS	1, 2, 4, 5, 7, 8	-88	-104	-100
		3, 6	-85	-101	-97
I_o^{Note3}	dBm/9.36 MHz	1, 2, 4, 5, 7, 8	-59.78	-73.04	-69.04
	dBm/18.36MHz	3, 6	-56.86	-70.11	-66.11
Propagation condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3:	$\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Table A.16.3.1.8.1-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2		
Duplex mode		1, 2, 3, 7	FDD		
		4, 5, 6, 8	TDD		
TDD special subframe configuration ^{Note1}		4, 5, 6, 8	6		
TDD uplink-downlink configuration ^{Note1}		4, 5, 6, 8	1		
BW _{channel}	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$		
PRACH Configuration ^{Note2}		1, 2, 3, 7	4		
		4, 5, 6, 8	53		
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns ^{Note3}		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		

PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note4}					
OCNG_RB ^{Note4}					
N _{oc} ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98		
Ê _s /N _{oc}	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	8	8
Ê _s /I _{ot} ^{Note6}	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	8	8
RSRP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-90	-90
SCH_RP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-90	-90
I _o ^{Note6}	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-67.21 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)	-58.57 +10log(N _{RB,c} /100)
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		
Antenna Configuration and Correlation Matrix ^{Note7}		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low		
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2:	PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].				
Note 3:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 4:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 5:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 6:	Ê _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 7:	Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

A.16.3.1.8.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 85 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in clause 6.1.2.1.

$T_{interrupt}$ = 35 ms in the test; $T_{interrupt}$ is defined in clause 6.1.2.1.

This gives a total of 85 ms.

A.16.3.1.9 SA NR - E-UTRAN handover with unknown target cell for 1 Rx UE

A.16.3.1.9.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to E-UTRAN handover requirements for the case when the target E-UTRAN cell is unknown as specified in clause 6.1D.2.1.

The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable. No Gap pattern shall be configured.

A RRC message implying handover shall be sent to the UE during period T1. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.16.3.1.9-1. General test parameters are provided in Table A.16.3.1.9.1-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.16.3.1.9.1-3 and A.16.3.1.9.1-4 respectively.

Table A.16.3.1.9.1-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.9.1-2: General test parameters for SA inter-RAT E-UTRAN handover

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell	Cell 1	NR cell
	Neighbouring cell	Cell 2	E-UTRAN cell
Final condition	Active cell	Cell 2	
NR measurement quantity		SS-RSRP	
DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure
Time offset between cells		3 ms	Asynchronous cells
T1	s	≤5	
T2	s	1	

Table A.16.3.1.9.1-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	1	

Duplex mode			1, 4	FDD	
			2, 3, 5, 6	TDD	
			7, 8	HD-FDD	
TDD Configuration			2, 5	TDDConf.1.1	
			3, 6	TDDConf.2.1	
BW _{channel}		MHz	1, 4, 7, 8	10: N _{RB,c} = 52 (FDD)	
			2, 5	10: N _{RB,c} = 52 (TDD)	
			3, 6	20: N _{RB,c} = 51 (TDD)	
PDSCH reference measurement channel			1, 4, 7, 8	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
CORSET reference channel			1, 4, 7, 8	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
TRS configuration			1, 4, 7, 8	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6, 7, 8	OP.1	
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	
	Initial UL BWP			ULBWP.0.1	
	Dedicated UL BWP			ULBWP.1.1	
SMTC configuration			1, 2, 3, 4, 5, 6, 7, 8	SMTC.1 RedCap	
SSB configuration			1, 2, 4, 5, 7, 8	SSB.1 FR1	
			3, 6	SSB.1 RedCap FR1	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N _{oc} ^{Note2}		dBm/15 KHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
N _{oc} ^{Note2}		dBm/SCS	1, 2, 4, 5, 7, 8	-98	
			3, 6	-95	
Ê _s /N _{oc}		dB	1, 2, 3, 4, 5, 6, 7, 8	0	0
Ê _s /I _{ot} ^{Note3}		dB	1, 2, 3, 4, 5, 6, 7, 8	0	0
SS-RSRP ^{Note3}		dBm/SCS	1, 2, 4, 5, 7, 8	-98	-98
			3, 6	-95	-95
I _o ^{Note3}		dBm/9.36 MHz	1, 2, 4, 5, 7, 8	-67.04	-67.04

	dBm/18.36 MHz	3, 6	-64.11	-64.11
Propagation condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	$\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.16.3.1.9.1-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6, 7	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6, 7	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$	
PRACH Configuration ^{Note2}		1, 2, 3, 7	4	
		4, 5, 6, 8	53	
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note3}		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note4}				

OCNG_RB ^{Note4}			
N _{oc} ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity 7
$\hat{E}_s/I_{ot}$ ^{Note6}	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity 7
RSRP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity -91
SCH_RP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity -91
I _o ^{Note6}	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-70.22 -62.43
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23]. Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23]. Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively. Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].			

A.16.3.1.9.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 165 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + T_{interrupt}, where:

RRC procedure delay = 50 ms and T_{interrupt} = 115 ms in the test based on requirements specified in clause 6.1D.2.1.

This gives a total of 165 ms.

A.16.3.1.10 SA NR - E-UTRAN handover with unknown target cell for 2 Rx UE

A.16.3.1.10.1 Test Purpose and Environment

The purpose of this set of tests is to verify that the UE can make correct inter-RAT E-UTRAN handover when operating in standalone (SA) operation with PCell in FR1. This test shall verify the NR to E-UTRAN handover requirements for the case when the target E-UTRAN cell is unknown as specified in clause 6.1D.2.1.

The test comprises of one NR carrier and one E-UTRA carrier. There are two cells and one cell on each carrier. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. The test consists of two successive time periods, with time durations of T1 and T2 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable. No Gap pattern shall be configured.

A RRC message implying handover shall be sent to the UE during period T1. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.16.3.1.10.1-1. General test parameters are provided in Table A.16.3.1.10.1-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.16.3.1.10.1-3 and A.16.3.1.10.1-4 respectively.

Table A.16.3.1.10.1-1: Supported test configurations for SA inter-RAT E-UTRAN handover tests

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.1.10.1-2: General test parameters for SA inter-RAT E-UTRAN handover

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell	Cell 1	NR cell
	Neighbouring cell	Cell 2	E-UTRAN cell
Final condition	Active cell	Cell 2	
NR measurement quantity		SS-RSRP	
DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure
Time offset between cells		3 ms	Asynchronous cells
T1	s	≤5	
T2	s	1	

Table A.16.3.1.10.1-3: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 1)

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
		7, 8	HD-FDD	
TDD Configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
BW _{channel}	MHz	1, 4, 7, 8	10: N _{RB,c} = 52 (FDD)	
		2, 5	10: N _{RB,c} = 52 (TDD)	
		3, 6	20: N _{RB,c} = 51 (TDD)	
PDSCH reference measurement channel		1, 4, 7, 8	SR.1.1 FDD	
		2, 5	SR.1.1 TDD	
		3, 6	SR.2.1 TDD	
CORSET reference channel		1, 4, 7, 8	CR.1.1 FDD	
		2, 5	CR.1.1 TDD	
		3, 6	CR.2.1 TDD	
TRS configuration		1, 4, 7, 8	TRS.1.1 FDD	
		2, 5	TRS.1.1 TDD	

OCNG pattern ^{Note1}			3, 6 1, 2, 3, 4, 5, 6, 7, 8	TRS.1.2 TDD OP.1	
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
	Dedicated DL BWP			DLBWP.1.1	
	Initial UL BWP			ULBWP.0.1	
	Dedicated UL BWP			ULBWP.1.1	
SMTC configuration			1, 2, 3, 4, 5, 6, 7, 8	SMTC.1 RedCap	
SSB configuration			1, 2, 4, 5, 7, 8	SSB.1 FR1	
			3, 6	SSB.1 RedCap FR1	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} ^{Note2}					
N_{oc} ^{Note2}		dBm/SCS	1, 2, 4, 5, 7, 8	-98	
			3, 6	-95	
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6, 7, 8	0	0
$\hat{E}_s/I_{ot}$ ^{Note3}		dB	1, 2, 3, 4, 5, 6, 7, 8	0	0
SS-RSRP ^{Note3}		dBm/SCS	1, 2, 4, 5, 7, 8	-98	-98
			3, 6	-95	-95
I_o ^{Note3}		dBm/9.36 MHz	1, 2, 4, 5, 7, 8	-67.04	-67.04
		dBm/18.36 MHz	3, 6	-64.12	-64.12
Propagation condition			1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Table A.16.3.1.10.1-4: Cell specific test parameters for SA inter-RAT E-UTRA handover (Cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2

RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6, 8	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6, 8	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PRACH Configuration ^{Note2}		1, 2, 3, 7	4	
		4, 5, 6, 8	53	
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note3}		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note4}				
OCNG_RB ^{Note4}				
N _{oc} ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
$\hat{E}_s/I_{ot}$ ^{Note6}	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
RSRP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-91
SCH_RP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-91
I ₀ ^{Note6}	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-70.22	-62.43
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	

Antenna Configuration and Correlation Matrix ^{Note 7}		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23]. Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23]. Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively. Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].			

A.16.3.1.10.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 165 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in clause 6.1.2.1.

$T_{interrupt}$ = 115 ms in the test; $T_{interrupt}$ is defined in clause 6.1.2.1.

This gives a total of 165 ms.

A.16.3.2 RRC Connection Mobility Control

A.16.3.2.1 SA: RRC Re-establishment

A.16.3.2.1.1 Intra-frequency RRC Re-establishment in FR1 for 1 Rx UE

A.16.3.2.1.1.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 with known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.16.3.2.1.1.1-1, table A.16.3.2.1.1.1-2 and table A.16.3.2.1.1.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.16.3.2.1.1.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.3.2.1.1.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1 for 1 Rx UE

Parameter	Unit	Test configuration	Value	Comment
-----------	------	--------------------	-------	---------

Initial condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
Final condition	Active cell		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μs	Synchronous cells
			3	3 μs	Synchronous cells
			4	3 ms	Asynchronous cells
N310		-	1, 2, 3, 4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3, 4	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3, 4	0	Radio link failure timer;
T311		ms	1, 2, 3, 4	3000	RRC re-establishment timer
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
			4	SSB.1 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
			4	SMTC.2	
DRX cycle length		s	1, 2, 3, 4	OFF	
PRACH configuration			1, 2, 3, 4	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1		s	1, 2, 3, 4	5	
T2		ms	1, 2, 3, 4	440	Time for the UE to detect RLF (Summation of T _{Evaluate_out_SSB} defined in clause 8.1B in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133)
T3		s	1, 2, 3, 4	2	

Table A.16.3.2.1.1.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1 for 1 Rx UE

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
		4	N/A			N/A		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
		4	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		

		3	CR.2.1 TDD			CR.2.1 TDD		
		4	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
		4	CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
		4	TRS.1.1 FDD			TRS.1.1 FDD		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		1, 2, 3, 4	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBW P.1.1
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBW P.1.1
RLM-RS		1, 2, 3, 4	SSB			SSB		
$\hat{E}_s / I_{ot}$	dB	1	1.54	-infinity	-infinity	-3.79	4	4
		2						
		3						
		4						
N_{oc} ^{Note2}	dBm/SCS	1	-98					
		2	-98					
		3	-95					
		4	-98					
N_{oc} ^{Note2}	dBm/15 kHz	1	-98					
		2						
		3						
		4						
$\hat{E}_s / N_{oc}$	dB	1	7	-infinity	-infinity	4	4	4
		2						
		3						
		4						
SS-RSRP ^{Note3}	dBm/SCS	1	-91	-infinity	-infinity	-94	-94	-94
		2	-91	-infinity	-infinity	-94	-94	-94
		3	-88	-infinity	-infinity	-91	-91	-91
		4	-91	-infinity	-infinity	-94	-94	-94
Io	dBm/9.36 MHz	1	-60.74	-64.59	-64.59	-60.74	-70.05	-64.59
	dBm/9.36 MHz	2	-60.74	-64.59	-64.59	-60.74	-70.05	-64.59
	dBm/18.36 MHz	3	-57.81	-61.66	-61.66	-57.81	-67.12	-61.66
	dBm/9.36 MHz	4	-60.74	-64.59	-64.59	-60.74	-67.12	-64.59
Propagation Condition		1, 2, 3, 4	AWGN					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								

A.16.3.2.1.1.2 Test Requirements

The RRC re-establishment delay is defined as the time from the moment UE declares RLF, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to a known NR intra frequency cell shall be less than 1.6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 1$$

$$T_{\text{identify_intra_NR}} = 200 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 1545 ms for RRC re-establishment delay, allow 440 ms + 1.6 s from the beginning of T2 in the test case.

A.16.3.2.1.2 Intra-frequency RRC Re-establishment in FR1 for 2 Rx UE

A.16.3.2.1.2.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 with known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.16.3.2.1.2.1-1, table A.16.3.2.1.2.1-2 and table A.16.3.2.1.2.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.16.3.2.1.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.3.2.1.2.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
Final condition	Active cell		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
			4	3 ms	Asynchronous cells
N310		-	1, 2, 3, 4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3, 4	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3, 4	0	Radio link failure timer;
T311		ms	1, 2, 3, 4	3000	RRC re-establishment timer
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
			4	SSB.1 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
			4	SMTC.2	
DRX cycle length		s	1, 2, 3, 4	OFF	
PRACH configuration			1, 2, 3, 4	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1		s	1, 2, 3, 4	5	
T2		ms	1, 2, 3, 4	240	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1B in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133)
T3		s	1, 2, 3, 4	2	

Table A.16.3.2.1.2.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
		4	N/A			N/A		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		

		3	SR.2.1 TDD			SR.2.1 TDD		
		4	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
		4	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
		4	CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
		4	TRS.1.1 FDD			TRS.1.1 FDD		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
Active DL BWP configuration		1, 2, 3, 4	DLBWP. 1.1	N/A	N/A	N/A	N/A	DLBW P.1.1
Active UL BWP configuration		1, 2, 3, 4	ULBWP. 1.1	N/A	N/A	N/A	N/A	ULBW P.1.1
RLM-RS		1, 2, 3, 4	SSB			SSB		
$\hat{E}_s / I_{ot}$	dB	1	1.54	-infinity	-infinity	-3.79	4	4
		2						
		3						
		4						
N_{oc} ^{Note2}	dBm/SCS	1	-98					
		2	-98					
		3	-95					
		4	-98					
N_{oc} ^{Note2}	dBm/15 kHz	1	-98					
		2						
		3						
		4						
$\hat{E}_s / N_{oc}$	dB	1	7	-infinity	-infinity	4	4	4
		2						
		3						
		4						
SS-RSRP ^{Note3}	dBm/SCS	1	-91	-infinity	-infinity	-94	-94	-94
		2	-91	-infinity	-infinity	-94	-94	-94
		3	-88	-infinity	-infinity	-91	-91	-91
		4	-91	-infinity	-infinity	-94	-94	-94
Io	dBm/9.36 MHz	1	-60.74	-64.59	-64.59	-60.74	-70.05	-64.59
	dBm/9.36 MHz	2	-60.74	-64.59	-64.59	-60.74	-70.05	-64.59
	dBm/18.36 MHz	3	-57.81	-61.66	-61.66	-57.81	-67.12	-61.66
	dBm/9.36 MHz	4	-60.74	-64.59	-64.59	-60.74	-67.12	-64.59
Propagation Condition		1, 2, 3, 4	AWGN					

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.3.2.1.2.2 Test Requirements

The RRC re-establishment delay is defined as the time from the moment UE declares RLF, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to a known NR intra frequency cell shall be less than 1.6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 1$$

$$T_{\text{identify_intra_NR}} = 200 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 1545 ms for RRC re-establishment delay, allow 240 ms + 1.6 s from the beginning of T2 in the test case.

A.16.3.2.1.3 Inter-frequency RRC Re-establishment in FR1 for 1 Rx UE

A.16.3.2.1.3.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR1 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.16.3.2.1.3.1-1, table A.16.3.2.1.3.1-2 and table A.16.3.2.1.3.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.16.3.2.1.3.1-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
---------------	-----------------------------	----------------------------

1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.16.3.2.1.3.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR1 for 1 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
Final condition	Active cell		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
			4	3 ms	Asynchronous cells
N310		-	1, 2, 3, 4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3, 4	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3, 4	0	Radio link failure timer;
T311		ms	1, 2, 3, 4	5000	RRC re-establishment timer
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
			4	SSB.1 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
			4	SMTC.2	
DRX cycle length		s	1, 2, 3, 4	OFF	
PRACH configuration			1, 2, 3, 4	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1		s	1, 2, 3, 4	5	
T2		ms	1, 2, 3, 4	440	Time for the UE to detect RLF (Summation of T _{Evaluate_out_SSB} defined in clause 8.1B in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133)
T3		s	1, 2, 3, 4	5	

Table A.16.3.2.1.3.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
RF Channel Number		1, 2, 3, 4	1			2		
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
		4	N/A			N/A		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
		4	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
		4	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
		4	CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
		4	TRS.1.1 FDD			TRS. 1.1 FDD		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBW P.1.1
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBW P.1.1
RLM-RS		1, 2, 3, 4	SSB			SSB		
$\hat{E}_s / I_{ot}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	7
		2						
		3						
		4						
N_{oc} ^{Note2}	dBm/SCS	1	-98					
		2	-98					
		3	-95					
		4	-98					
N_{oc} ^{Note2}	dBm/15 kHz	1	-98					
		2						
		3						
		4						
$\hat{E}_s / N_{oc}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	7
		2						
		3						
		4						
SS-RSRP ^{Note3}	dBm/SCS	1	-94	-infinity	-infinity	-infinity	-infinity	-91
		2	-94	-infinity	-infinity	-infinity	-infinity	-91

		3	-91	-infinity	-infinity	-infinity	-infinity	-88
		4	-94	-infinity	-infinity	-infinity	-infinity	-91
Io	dBm/9.36 MHz	1	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26
	dBm/9.36 MHz	2	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26
	dBm/18.36 MHz	3	-61.66	-67.12	-67.12	-67.12	-67.12	-59.33
	dBm/9.36 MHz	4	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26
Propagation Condition		1, 2, 3, 4	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers							
Note 3:	and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							

A.16.3.2.1.3.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 3 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 2$$

$$T_{\text{identify_intra_NR}} = 800 \text{ ms}$$

$$T_{\text{identify_inter_NR}} = 800 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 2945 ms, allow 3 s in the test case.

A.16.3.2.1.4 Inter-frequency RRC Re-establishment in FR1 for 2 Rx UE

A.16.3.2.1.4.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR1 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.16.3.2.1.4.1-1, table A.16.3.2.1.4.1-2 and table A.16.3.2.1.4.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the

radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.16.3.2.1.4.1-1: Supported test configurations

Configuration	Description of serving cell	Description of target cell
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode

Note: The UE is only required to be tested in one of the supported test configurations.

Table A.16.3.2.1.4.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR1 for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
Final condition	Active cell		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1, 2	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
			4	3 ms	Asynchronous cells
N310		-	1, 2, 3, 4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3, 4	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3, 4	0	Radio link failure timer;
T311		ms	1, 2, 3, 4	5000	RRC re-establishment timer
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
			4	SSB.1 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
			4	SMTC.2	
DRX cycle length		s	1, 2, 3, 4	OFF	
PRACH configuration			1, 2, 3, 4	FR1 PRACH configuration 1	Table A.3.8.2.1-1
T1		s	1, 2, 3, 4	5	

T2	ms	1, 2, 3, 4	240	Time for the UE to detect RLF (Summation of $T_{\text{Evaluate_out_SSB}}$ defined in clause 8.1B in TS 38.133, T_{310} and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133)
T3	s	1, 2, 3, 4	5	

Table A.16.3.2.1.4.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR1 for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
RF Channel Number		1, 2, 3, 4	1			2		
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
		4	N/A			N/A		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
		4	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
		4	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
		4	CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
TRS configuration		1	TRS.1.1 FDD			TRS.1.1 FDD		
		2	TRS.1.1 TDD			TRS.1.1 TDD		
		3	TRS.1.2 TDD			TRS.1.2 TDD		
		4	TRS.1.1 FDD			TRS.1.1 FDD		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
Active DL BWP confgiuration		1, 2, 3, 4	DLBWP.1.1	N/A	N/A	N/A	N/A	DLBW P.1.1
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1	N/A	N/A	N/A	N/A	ULBW P.1.1
RLM-RS		1, 2, 3, 4	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	7
		2						
		3						
		4						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
		4	-98					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						

		3						
		4						
$\hat{E}_s / N_{oc}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	7
		2						
		3						
		4						
SS-RSRP ^{Note3}	dBm/SCS	1	-94	-infinity	-infinity	-infinity	-infinity	-91
		2	-94	-infinity	-infinity	-infinity	-infinity	-91
		3	-91	-infinity	-infinity	-infinity	-infinity	-88
		4	-94	-infinity	-infinity	-infinity	-infinity	-91
Io	dBm/9.36 MHz	1	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26
	dBm/9.36 MHz	2	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26
	dBm/18.36 MHz	3	-61.66	-67.12	-67.12	-67.12	-67.12	-59.33
	dBm/9.36 MHz	4	-64.59	-70.05	-70.05	-70.05	-70.05	-62.26
Propagation Condition		1, 2, 3, 4	AWGN					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers								
and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								

A.16.3.2.1.4.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 3 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 2$$

$$T_{\text{identify_intra_NR}} = 800 \text{ ms}$$

$$T_{\text{identify_inter_NR}} = 800 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 2945 ms, allow 3 s in the test case.

A.16.3.2.1.5 Intra-frequency RRC Re-establishment in FR1 for 1 Rx UE without serving cell timing

A.16.3.2.1.5.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.16.3.2.1.5.1-1, table A.16.3.2.1.5.1-2 and table A.16.3.2.1.5.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.16.3.2.1.5.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.3.2.1.5.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
Final condition	Active cell		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
			4	3 ms	Asynchronous cells
N310		-	1, 2, 3, 4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3, 4	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3, 4	6000	Radio link failure timer configured by <i>RLF-TimersAndConstants</i>
T311		ms	1, 2, 3, 4	3000	RRC re-establishment timer
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
			4	SSB.1 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
			4	SMTC.2	
DRX cycle length		s	1, 2, 3, 4	OFF	

PRACH configuration		1, 2, 3, 4	FR1 PRACH configurati on 1	Table A.3.8.2.1-1
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	6.24	Time for the UE to detect RLF (Summation of $T_{\text{Evaluate_out_SSB}}$ defined in clause 8.1B in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133)
T3	s	1, 2, 3, 4	3	

Table A.16.3.2.1.5.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
		4	N/A			N/A		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
		4	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
		4	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
		4	CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1			DLBWP.0.1		
TRS Configuration		1	TRS.1.1.FDD			TRS.1.1.FDD		
		2	TRS.1.1.TDD			TRS.1.1.TDD		
		3	TRS.1.2.TDD			TRS.1.2.TDD		
		4	TRS.1.1.FDD			TRS.1.1.FDD		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3, 4	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	4
		2						
		3						
		4						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
		4	-98					
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						

		3						
		4						
$\hat{E}_s / N_{oc}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	4
		2						
		3						
		4						
SS-RSRP ^{Note3}	dBm/SCS	1	-94	-infinity	-infinity	-infinity	-infinity	-94
		2	-94	-infinity	-infinity	-infinity	-infinity	-94
		3	-91	-infinity	-infinity	-infinity	-infinity	-91
		4	-94	-infinity	-infinity	-infinity	-infinity	-94
Io	dBm/9.36 MHz	1	-64.59	-70.05	-70.05	-70.05	-70.05	-64.59
	dBm/9.36 MHz	2	-64.59	-70.05	-70.05	-70.05	-70.05	-64.59
	dBm/18.36 MHz	3	-61.66	-67.12	-67.12	-67.12	-67.12	-61.66
	dBm/9.36 MHz	4	-64.59	-70.05	-70.05	-70.05	-70.05	-64.59
Propagation Condition		1, 2, 3, 4	AWGN					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers								
and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								

A.16.3.2.1.5.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 2.2 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 1$$

$$T_{\text{identify_intra_NR}} = 800 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 [2] for the target intra-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 2145 ms, allow 2.2 s in the test case.

A.16.3.2.1.6 Intra-frequency RRC Re-establishment in FR1 for 2 Rx UE without serving cell timing

A.16.3.2.1.6.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR1 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.16.3.2.1.6.1-1, table A.16.3.2.1.6.1-2 and table A.16.3.2.1.6.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.16.3.2.1.6.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.3.2.1.6.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4	Cell1	
	Neighbour cells		1, 2, 3, 4	Cell2	
Final condition	Active cell		1, 2, 3, 4	Cell2	
RF Channel Number			1, 2, 3, 4	1	
Time offset between cells			1	3 ms	Asynchronous cells
			2	3 μ s	Synchronous cells
			3	3 μ s	Synchronous cells
			4	3 ms	Asynchronous cells
N310		-	1, 2, 3, 4	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1, 2, 3, 4	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1, 2, 3, 4	6000	Radio link failure timer configured by <i>RLF-TimersAndConstants</i>
T311		ms	1, 2, 3, 4	3000	RRC re-establishment timer
Access Barring Information		-	1, 2, 3, 4	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR1	
			2	SSB.1 FR1	
			3	SSB.1 RedCap FR1	
			4	SSB.1 FR1	
SMTC configuration			1	SMTC.2	
			2	SMTC.1	
			3	SMTC.1	
			4	SMTC.2	
DRX cycle length		s	1, 2, 3, 4	OFF	

PRACH configuration		1, 2, 3, 4	FR1 PRACH configurati on 1	Table A.3.8.2.1-1
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	6.24	Time for the UE to detect RLF (Summation of $T_{\text{Evaluate_out_SSB}}$ defined in clause 8.1B in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133)
T3	s	1, 2, 3, 4	3	

Table A.16.3.2.1.6.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR1

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1	N/A			N/A		
		2	TDDConf.1.1			TDDConf.1.1		
		3	TDDConf.2.1			TDDConf.2.1		
		4	N/A			N/A		
PDSCH RMC configuration		1	SR.1.1 FDD			SR.1.1 FDD		
		2	SR.1.1 TDD			SR.1.1 TDD		
		3	SR.2.1 TDD			SR.2.1 TDD		
		4	SR.1.1 FDD			SR.1.1 FDD		
RMSI CORESET RMC configuration		1	CR.1.1 FDD			CR.1.1 FDD		
		2	CR.1.1 TDD			CR.1.1 TDD		
		3	CR.2.1 TDD			CR.2.1 TDD		
		4	CR.1.1 FDD			CR.1.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.1.1 FDD			CCR.1.1 FDD		
		2	CCR.1.1 TDD			CCR.1.1 TDD		
		3	CCR.2.1 TDD			CCR.2.1 TDD		
		4	CCR.1.1 FDD			CCR.1.1 FDD		
OCNG Pattern		1, 2, 3, 4	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2, 3, 4	DLBWP.0.1 RedCap			DLBWP.0.1 RedCap		
TRS Configuration		1	TRS.1.1.FDD			TRS.1.1.FDD		
		2	TRS.1.1.TDD			TRS.1.1.TDD		
		3	TRS.1.2.TDD			TRS.1.2.TDD		
		4	TRS.1.1.FDD			TRS.1.1.FDD		
Initial UL BWP configuration		1, 2, 3, 4	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2, 3, 4	SSB			SSB		
$\hat{E}_s/I_{ot}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	4
		2						
		3						
		4						
N_{oc} Note2	dBm/SCS	1	-98					
		2	-98					
		3	-95					
		4						
N_{oc} Note2	dBm/15 kHz	1	-98					
		2						

		3						
		4						
$\hat{E}_s / N_{oc}$	dB	1	4	-infinity	-infinity	-infinity	-infinity	4
		2						
		3						
		4						
SS-RSRP ^{Note3}	dBm/SCS	1	-94	-infinity	-infinity	-infinity	-infinity	-94
		2	-94	-infinity	-infinity	-infinity	-infinity	-94
		3	-91	-infinity	-infinity	-infinity	-infinity	-91
		4	-94	-infinity	-infinity	-infinity	-infinity	-94
Io	dBm/9.36 MHz	1	-64.59	-70.05	-70.05	-70.05	-70.05	-64.59
	dBm/9.36 MHz	2	-64.59	-70.05	-70.05	-70.05	-70.05	-64.59
	dBm/18.36 MHz	3	-61.66	-67.12	-67.12	-67.12	-67.12	-61.66
	dBm/9.36 MHz	4	-64.59	-70.05	-70.05	-70.05	-70.05	-64.59
Propagation Condition		1, 2, 3, 4	AWGN					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								

A.16.3.2.1.6.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 2.2 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 1$$

$$T_{\text{identify_intra_NR}} = 800 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 [2] for the target intra-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 2145 ms, allow 2.2 s in the test case.

A.16.3.2.2 Random Access

A.16.3.2.2.1 4-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE

A.16.3.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.16.3.2.2.1.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.16.3.2.2.1.1-2.

Table A.16.3.2.2.1.1-1: Supported test configurations for contention based random access test in FR1 for NR standalone

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table A.16.3.2.2.1.1-2: General test parameters for contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1,4		SSB pattern 1 in FR1	As defined in A.3.10 and A.3.10B, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB pattern 1 in FR1	
	Config 3		SSB pattern 1 for RedCap in FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3.10 and A.3.10B
SS/PBCH block index			0,1	Different from the definition in A.3.10 and A.3.10B
Duplex Mode for Cell 1	Config 1		FDD	
	Config 2,3		TDD	
	Config 4		HD-FDD	
TDD Configuration	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
OCNG Pattern ^{Note 1}			OP.1	As defined in A.3.2.1.
PDSCH parameters ^{Note 4}	Config 1,4		SR.1.1 FDD	As defined in A.3.1.1.
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	

	Config 3			CR.2.1 TDD		
Dedicated CORESET Reference Channel	Config 1,4			CCR.1.1 FDD		
	Config 2			CCR.1.1 TDD		
	Config 3			CCR.2.1 TDD		
NR RF Channel Number				1		
EPRE ratio of PSS to SSS			dB	0		
EPRE ratio of PBCH_DMRS to SSS			dB			
EPRE ratio of PBCH to PBCH_DMRS			dB			
EPRE ratio of PDCCH_DMRS to SSS			dB			
EPRE ratio of PDCCH to PDCCH_DMRS			dB			
EPRE ratio of PDSCH_DMRS to SSS			dB			
EPRE ratio of PDSCH to PDSCH_DMRS			dB			
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i> +1dB	
	N_{oc}	Config 1,4	dBm/15kHz	-98		
		Config 2		-98		
		Config 3		-101		
	$\hat{E}_s / N_{oc}$		dB	3		
	SS-RSRP ^{Note 3}		dBm/ SCS	-95		
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i> +1dB	
	N_{oc}	Config 1,4	dBm/15kHz	-98		
		Config 2		-98		
		Config 3		-101		
	$\hat{E}_s / N_{oc}$		dB	-17		
	SS-RSRP ^{Note 3}		dBm/ SCS	-115		
I_o ^{Note 2}		Config 1,4	dBm	-65.3/9.36MHz	For symbols without SSB index 1	
		Config 2		-65.3/9.36MHz		
		Config 3		-65.38/18.36MHz		
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].	
Configured UE transmitted power ($P_{C_{MAX, f, c}}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.	
PRACH Configuration				FR1 PRACH configuration 1	As defined in A.3.8.	
Propagation Condition			-	AWGN		
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.						
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.						
Note 3: Void						
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.						

A.16.3.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.16.3.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured $rsrp\text{-}ThresholdSSB + 1\text{ dB}$.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for

test configuration 2. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.16.3.2.2.1.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A.16.3.2.2.1.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.16.3.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.16.3.2.2.2 4-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE

A.16.3.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.16.3.2.2.2.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.16.3.2.2.2.1-2.

Table A.16.3.2.2.2.1-1: Supported test configurations for contention based random access test in FR1 for NR standalone

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode

2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.16.3.2.2.1-2: General test parameters for contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1,4		SSB pattern 1 in FR1	As defined in A.3.10 and A.3.10B, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB pattern 1 in FR1	
	Config 3		SSB pattern 1 for RedCap in FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3.10 and A.3.10B
SS/PBCH block index			0,1	Different from the definition in A.3.10 and A.3.10B
Duplex Mode for Cell 1	Config 1,4		FDD	
	Config 2,3		TDD	
TDD Configuration	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
OCNG Pattern ^{Note 1}			OP.1	As defined in A.3.2.1.
PDSCH parameters ^{Note 4}	Config 1,4		SR.1.1 FDD	As defined in A.3.1.1.
	Config 2		SR.1.1 TDD	
	Config 3		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	Power of SSB with index 0 is set to be above configured $rsrp\text{-}ThresholdSSB$
	N_{oc}	Config 1,4	dBm/15kHz	
		Config 2		
		Config 3		

	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP ^{Note 3}		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1,4	dBm/15kHz	-98	
		Config 2		-98	
		Config 3		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP ^{Note 3}		dBm/ SCS	-115	
I_o ^{Note 2}		Config 1,4	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-65.3/9.36MHz	
		Config 3		-65.38/18.36 MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{C_{MAX}, f, c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 1	As defined in A.3.8.
Propagation Condition			-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.					
Note 2: SS-RSRP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purpose. They are not settable parameters.					
Note 3: Void					
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.					

A.16.3.2.2.2.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.16.3.2.2.2.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.2.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the

System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.16.3.2.2.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A.16.3.2.2.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.16.3.2.2.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.16.3.2.2.3 4-step RA type non-contention based random access test in FR1 for NR standalone for 1 Rx UE

A.16.3.2.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2B and Clause 7.1A.2 in an AWGN model.

For this test one cell is used and configured as Pcell in FR1. Supported test parameters are shown in Table A.16.3.2.2.3.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.16.3.2.2.3.1-2 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.16.3.2.2.3.1-1: Supported test configurations for non-contention based random access test in FR1 for NR standalone

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations depending on UE capability	

Table A.16.3.2.2.3.1-2: General test parameters for non-contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1, 2,4		SSB pattern 1 in FR1	SSB pattern 1 in FR1	As defined in A.3.10B, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 3		SSB pattern 1 for RedCap in FR1	SSB pattern 1 for RedCap in FR1	
Number of SSBs per SS-burst			2	2	Different from the definition in A.3.10B
SS/PBCH block index			0,1	0,1	Different from the definition in A.3.10B
CSI-RS Configuration	Config 1, 2, 4		N/A	CSI-RS.1.1 FDD	As defined in A.3.14

	Config 3			CSI-RS.2.1 TDD	
Duplex Mode for Cell 1	Config 1		FDD	FDD	
	Config 2, 3		TDD	TDD	
	Config 4		HD-FDD	HD-FDD	
TDD Configuration	Config 2		TDDConf.1.1	TDDConf.1.1	
	Config 3		TDDConf.2.1	TDDConf.2.1	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Pattern ^{Note 1}			OP.1	OP.1	As defined in A.3.2.1.
PDSCH parameters ^{Note 4}	Config 1,4		SR.1.1 FDD	SR.1.1 FDD	As defined in A.3.1B.1.
	Config 2		SR.1.1 TDD	SR.1.1 TDD	
	Config 3		CR.2.1 TDD	CR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 TDD	CR.1.1 TDD	
	Config 2		CR.1.1 TDD	CR.1.1 TDD	
	Config 3		CR.2.1 TDD	CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 TDD	CCR.1.1 TDD	
	Config 2		CCR.1.1 TDD	CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	CCR.2.1 TDD	
NR RF Channel Number			1	1	
EPRE ratio of PSS to SSS		dB	0	0	
EPRE ratio of PBCH_DMRS to SSS		dB			
EPRE ratio of PBCH to PBCH_DMRS		dB			
EPRE ratio of PDCCH_DMRS to SSS		dB			
EPRE ratio of PDCCH to PDCCH_DMRS		dB			
EPRE ratio of PDSCH_DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH_DMRS		dB			
SSB with index 0	$\hat{E}_s / I_{ot}$	dB	3	3	Power of SSB with index 0 is set to be above configured $rsrp-ThresholdSSB+1dB$
	N_{oc}	dBm/15kHz	-98	-98	
	Config 1				
	Config 2		-98	-98	
	Config 3		-101	-101	
	$\hat{E}_s / N_{oc}$	dB	3	3	
	SS-RSRP ^{Note 3}	dBm/ SCS	-95	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$	dB	-17	-17	Power of SSB with index 1 is set to be below configured $rsrp-ThresholdSSB+1dB$
	N_{oc}	dBm/15kHz	-98	-98	
	Config 1				
	Config 2		-98	-98	
	Config 3		-101	-101	
	$\hat{E}_s / N_{oc}$	dB	-17	-17	
	SS-RSRP ^{Note 3}	dBm/ SCS	-115	-115	
I_0 ^{Note 2}	Config 1	dBm	-65.3/9.36MHz	-65.3/9.36MHz	For symbols without SSB index 1
	Config 2		-65.3/9.36MHz	-65.3/9.36MHz	

	Config 3		-65.38/18.36 MHz	-65.38/18.36 MHz	
ss-PBCH-BlockPower		dBm/ SCS	-5	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{\text{CMAX}, f, c}$)		dBm	23	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration			FR1 PRACH configuration 2	FR1 PRACH configuration 3	As defined in A.3.8B.2.
Propagation Condition		-	AWGN	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters. Note 3: Void Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.					

A.16.3.2.2.3.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.16.3.2.2.3.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.2.1 for SSB-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.3.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-2, to test the UE behavior specified in Clause 6.2.2.2.2.1 for CSI-RS-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for

test configuration 2. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be 25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2.

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.3.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.3.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.4 4-step RA type non-contention based random access test in FR1 for NR standalone for 2 Rx UE

A.16.3.2.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2B and Clause 7.1A.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.16.3.2.2.4.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.16.3.2.2.4.1-2 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.16.3.2.2.4.1-1: Supported test configurations for non-contention based random access test in FR1 for NR standalone

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table A.16.3.2.2.4.1-2: General test parameters for non-contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1, 2,4		SSB pattern 1 in FR1	SSB pattern 1 in FR1	As defined in A.3.10B, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 3		SSB pattern 1 for RedCap in FR1	SSB pattern 1 for RedCap in FR1	
Number of SSBs per SS-burst			2	2	Different from the definition in A.3.10B
SS/PBCH block index			0,1	0,1	Different from the definition in A.3.10B
CSI-RS Configuration	Config 1, 2, 4		N/A	CSI-RS.1.1 FDD	As defined in A.3.14
	Config 3			CSI-RS.2.1 TDD	
Duplex Mode for Cell 1	Config 1		FDD	FDD	
	Config 2, 3		TDD	TDD	
	Config 4		HD-FDD	HD-FDD	
TDD Configuration	Config 2		TDDConf.1.1	TDDConf.1.1	
	Config 3		TDDConf.2.1	TDDConf.2.1	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	TRS.1.2 TDD	
OCNG Pattern ^{Note 1}			OP.1	OP.1	As defined in A.3.2.1.
PDSCH parameters ^{Note 4}	Config 1,4		SR.1.1 FDD	SR.1.1 FDD	As defined in A.3.1B.1.
	Config 2		SR.1.1 TDD	SR.1.1 TDD	
	Config 3		CR.2.1 TDD	CR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 TDD	CR.1.1 TDD	
	Config 2		CR.1.1 TDD	CR.1.1 TDD	
	Config 3		CR.2.1 TDD	CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 TDD	CCR.1.1 TDD	
	Config 2		CCR.1.1 TDD	CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	CCR.2.1 TDD	
NR RF Channel Number			1	1	
EPRE ratio of PSS to SSS		dB	0	0	
EPRE ratio of PBCH_DMRS to SSS		dB			

EPRE ratio of PBCH to PBCH_DMRS			dB			
EPRE ratio of PDCCH_DMRS to SSS			dB			
EPRE ratio of PDCCH to PDCCH_DMRS			dB			
EPRE ratio of PDSCH_DMRS to SSS			dB			
EPRE ratio of PDSCH to PDSCH_DMRS			dB			
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	3	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1.4	dBm/15kHz	-98	-98	
		Config 2		-98	-98	
		Config 3		-101	-101	
	$\hat{E}_s / N_{oc}$		dB	3	3	
	SS-RSRP ^{Note 3}		dBm/ SCS	-95	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	-17	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	N_{oc}	Config 1.4	dBm/15kHz	-98	-98	
		Config 2		-98	-98	
		Config 3		-101	-101	
	$\hat{E}_s / N_{oc}$		dB	-17	-17	
	SS-RSRP ^{Note 3}		dBm/ SCS	-115	-115	
I_o ^{Note 2}		Config 1.4	dBm	-65.3/9.36MHz	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-65.3/9.36MHz	-65.3/9.36MHz	
		Config 3		-65.38/18.36 MHz	-65.38/18.36 MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{C_{MAX, f, c}}$)			dBm	23	23	As defined in clause 6.2.4 in TS 38.101-1.
PRACH Configuration				FR1 PRACH configuration 2	FR1 PRACH configuration 3	As defined in A.3.8B.2.
Propagation Condition			-	AWGN	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.						
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.						
Note 3: Void						
Note 4: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.						

A.16.3.2.2.4.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.16.3.2.2.4.2.1 SSB-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.2.1 for SSB-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.4.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-2, to test the UE behavior specified in Clause 6.2.2.2.2.1 for CSI-RS-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.4.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.4.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.5 2-step RA type contention based random access test in FR1 for NR standalone for 1 Rx UE

A.16.3.2.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the 2-step RA type random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.16.3.2.2.5.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.16.3.2.2.5.1-2.

Table A.16.3.2.2.5.1-1: Supported test configurations for 2-step RA type contention based random access with successRAR test in FR1 for NR standalone

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table A.16.3.2.2.5.1-2: General test parameters for 2-step RA type contention based random access with successRAR test in FR1 for NR standalone

Parameter	Unit	Test-1	Comments
SSB Configuration	Config 1,2,4 Config 3	SSB pattern 1 in FR1 SSB.1 RedCap FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
Number of SSBs per SS-burst		2	Different from the definition in A.3.10

SS/PBCH block index				0,1	Different from the definition in A.3.10	
Duplex Mode for Cell 2	Config 1			FDD		
	Config 2,3			TDD		
	Config 4			HD-FDD		
TDD Configuration	Config 2			TDDConf.1.1		
	Config 3			TDDConf.2.1		
CSI-RS for tracking	Config 1,4			TRS.1.1 FDD		
	Config 2			TRS.1.1 TDD		
	Config 3			TRS.1.2 TDD		
OCNG Pattern ^{Note 1}				OCNG pattern 1	As defined in A.3.2.1.	
PDSCH parameters ^{Note 3}	Config 1,4			SR.1.1 FDD	As defined in A.3.1.1.	
	Config 2			SR.1.1 TDD		
	Config 3			SR.2.1 TDD		
RMSI CORESET Reference Channel	Config 1,4			CR.1.1 FDD		
	Config 2			CR.1.1 TDD		
	Config 3			CR.2.1 TDD		
Dedicated CORESET Reference Channel	Config 1,4			CCR.1.1 FDD		
	Config 2			CCR.1.1 TDD		
	Config 3			CCR.2.1 TDD		
NR RF Channel Number				1		
EPRE ratio of PSS to SSS			dB	0		
EPRE ratio of PBCH_DMRS to SSS			dB			
EPRE ratio of PBCH to PBCH_DMRS			dB			
EPRE ratio of PDCCH_DMRS to SSS			dB			
EPRE ratio of PDCCH to PDCCH_DMRS			dB			
EPRE ratio of PDSCH_DMRS to SSS			dB			
EPRE ratio of PDSCH to PDSCH_DMRS			dB			
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured <i>msgA-RSRP-ThresholdSSB</i> +1dB	
	N_{oc}	Config 1,2,4	dBm/15kHz	-98		
		Config 3		-101		
	$\hat{E}_s / N_{oc}$		dB	3		
	SS-RSRP		dBm/ SCS	-95		
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured <i>msgA-RSRP-ThresholdSSB</i> +1dB	
	N_{oc}	Config 1,2,4	dBm/15kHz	-98		
		Config 3		-101		
	$\hat{E}_s / N_{oc}$		dB	-17		
	SS-RSRP		dBm/ SCS	-115		
I_0 ^{Note 2}		Config 1,2,4	dBm	-65.3/9.36MHz	For symbols without SSB index 1	
		Config 3		-65.38/18.36 MHz		
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].	
Configured UE transmitted power ($P_{C_{MAX}, f, c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.	
MsgA Configuration				FR1 MsgA configuration 1	As defined in A.3.20.2.1.	
<i>msgA-RSRP-ThresholdSSB</i>			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].	

Propagation Condition	-	AWGN	
Note 1:	OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.		
Note 2:	SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.		
Note 3:	The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.		

A.16.3.2.2.5.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.16.3.2.2.5.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.1.1 the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB*+1dB.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA preamble transmission shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The power of the first MsgA PUSCH transmission shall be 3dB lower than the first MsgA preamble for test configuration 1 & 4 and same as the first MsgA preamble for test configuration 2 & 3 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.5.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.1.2 the System Simulator shall transmit a MsgB containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit an ACK if the MsgB with a successRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble and if the Contention Resolution is successful.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB(s) contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The power of the first MsgA PUSCH transmission shall be 3dB lower than the first MsgA preamble for test configuration 1 & 4 and same as the first MsgA preamble for test configuration 2 & 3 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.5.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.1.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The power of the first MsgA PUSCH transmission shall be 3dB lower than the first MsgA preamble for test configuration 1 & 4 and same as the first MsgA preamble for test configuration 2 & 3 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.6 2-step RA type contention based random access test in FR1 for NR standalone for 2 Rx UE

A.16.3.2.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the 2-step RA type random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.16.3.2.2.6.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.16.3.2.2.6.1-2.

Table A.16.3.2.2.6.1-1: Supported test configurations for 2-step RA type contention based random access with successRAR test in FR1 for NR standalone

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table A.16.3.2.2.6.1-2: General test parameters for 2-step RA type contention based random access with successRAR test in FR1 for NR standalone

Parameter	Unit	Test-1	Comments
SSB Configuration	Config 1,2,4 Config 3	SSB.1 FR1 SSB.1 RedCap FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
Number of SSBs per SS-burst		2	Different from the definition in A.3.10
SS/PBCH block index		0,1	Different from the definition in A.3.10

Duplex Mode for Cell 2	Config 1			FDD	
	Config 2,3			TDD	
	Config 4			HD-FDD	
TDD Configuration	Config 2			TDDConf.1.1	
	Config 3			TDDConf.2.1	
CSI-RS for tracking	Config 1,4			TRS.1.1 FDD	
	Config 2			TRS.1.1 TDD	
	Config 3			TRS.1.2 TDD	
OCNG Pattern ^{Note 1}				OCNG pattern 1	As defined in A.3.2.1.
PDSCH parameters ^{Note 3}	Config 1,4			SR.1.1 FDD	As defined in A.3.1.1.
	Config 2			SR.1.1 TDD	
	Config 3			SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4			CR.1.1 FDD	
	Config 2			CR.1.1 TDD	
	Config 3			CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4			CCR.1.1 FDD	
	Config 2			CCR.1.1 TDD	
	Config 3			CCR.2.1 TDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured <i>msgA-RSRP-ThresholdSSB</i>
	N_{oc}	Config 1,2,4	dBm/15kHz	-98	
		Config 3		-101	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured <i>msgA-RSRP-ThresholdSSB</i>
	N_{oc}	Config 1,2,4	dBm/15kHz	-98	
		Config 3		-101	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP		dBm/ SCS	-115	
I_0 ^{Note 2}		Config 1,2,4	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 3		-65.38/18.36 MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{C_{MAX, f, c}}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 1	As defined in A.3.20.2.1.
<i>msgA-RSRP-ThresholdSSB</i>			dBm	RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
Propagation Condition			-	AWGN	

Note 1:	OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2:	SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.
Note 3:	The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.16.3.2.2.6.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.16.3.2.2.6.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.1.1 the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB*.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA preamble transmission shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The power of the first MsgA PUSCH transmission shall be 3dB lower than the first MsgA preamble for test configuration 1 & 4 and same as the first MsgA preamble for test configuration 2 & 3 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.6.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.1.2 the System Simulator shall transmit a MsgB containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit an ACK if the MsgB with a successRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble and if the Contention Resolution is successful.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB(s) contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The power of the first MsgA PUSCH transmission shall be 3dB lower than the first MsgA preamble for test configuration 1 & 4 and same as the first MsgA preamble for test configuration 2 & 3 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.6.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.1.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 1,3 and 4, and be -25 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18] for test configuration 2. The power of the first MsgA PUSCH transmission shall be 3dB lower than the first MsgA preamble for test configuration 1 & 4 and same as the first MsgA preamble for test configuration 2 & 3 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.7 2-step RA type non-contention based test in FR1 for NR standalone for 1 RX UE

A.16.3.2.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.16.3.2.2.7.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.16.3.2.2.7.1-2.

Table A.16.3.2.2.7.1-1: Supported test configurations for non-contention based random access test in FR1 for NR standalone

Config	Description
1	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table A.16.3.2.2.7.1-2: General test parameters for non-contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.1 RedCap FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB.1 FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3.10

SS/PBCH block index			0,1	Different from the definition in A.3.10	
Duplex Mode for Cell 1	Config 1		TDD		
	Config 2		HD-FDD		
TDD Configuration	Config 1		TDDConf.2.1		
CSI-RS for tracking	Config 1		TRS.1.2 TDD		
	Config 2		TRS.1.1 FDD		
OCNG Pattern ^{Note 1}			OCNG pattern 1	As defined in A.3.2.1.	
PDSCH parameters ^{Note 4}	Config 1		SR.2.1 TDD	As defined in A.3.1.1.	
	Config 2		SR.1.1 FDD		
RMSI CORESET	Config 1		CR.2.1 TDD		
Reference Channel	Config 2		CR.1.1 FDD		
Dedicated CORESET Reference Channel	Config 1		CCR.2.1 TDD		
	Config 2		CCR.1.1 FDD		
NR RF Channel Number			1		
EPRE ratio of PSS to SSS		dB	0		
EPRE ratio of PBCH_DMRS to SSS		dB			
EPRE ratio of PBCH to PBCH_DMRS		dB			
EPRE ratio of PDCCH_DMRS to SSS		dB			
EPRE ratio of PDCCH to PDCCH_DMRS		dB			
EPRE ratio of PDSCH_DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH_DMRS		dB			
msgA-RSRP-ThresholdSSB			RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].	
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured msgA-RSRP-ThresholdSSB+1dB
	N_{oc}	Config 1	dBm/15kHz	-101	
		Config 2		-98	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP ^{Note 3}		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured msgA-RSRP-ThresholdSSB+1dB
	N_{oc}	Config 1	dBm/15kHz	-101	
		Config 2		-98	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP ^{Note 3}		dBm/ SCS	-115	
I _o ^{Note 2}		Config 1	dBm	-65.38/18.36 MHz	For symbols without SSB index 1
				Config 2	
ss-PBCH-BlockPower		dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].	
Configured UE transmitted power ($P_{C_{MAX, f, c}}$)		dBm	23	As defined in clause 6.2.4 in TS 38.101-1.	
MsgA Configuration			FR1 MsgA configuration 2	As defined in A.3.20.2.2.	
Propagation Condition		-	AWGN		
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.					
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.					

Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.

A.16.3.2.2.7.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.16.3.2.2.7.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.2.1, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA PRACH on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA preamble for test configuration 1 and 3dB lower than the first MsgA preamble for test configuration 2 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.7.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.2.2 the System Simulator shall transmit a MsgB containing a fallbackRAR containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 containing the payload of MsgA PUSCH if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble. The UE shall monitor contention resolution as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA preamble for test configuration 1 and 3dB lower than the first MsgA preamble for test configuration 2 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA and msg3 transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.7.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.2.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access

Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA preamble for test configuration 1 and 3dB lower than the first MsgA preamble for test configuration 2 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.8 2-step RA type non-contention based test in FR1 for NR standalone for 2 RX UE

A.16.3.2.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used and configured as PCell in FR1. Supported test parameters are shown in Table A.16.3.2.2.8.1-1. UE capable of SA with PCell in FR1 needs to be tested by using the parameters in Table A.16.3.2.2.8.1-2.

Table A.16.3.2.2.8.1-1: Supported test configurations for non-contention based random access test in FR1 for NR standalone

Config	Description
1	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations depending on UE capability

Table A.16.3.2.2.8.1-2: General test parameters for non-contention based random access test in FR1 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.1 RedCap FR1	As defined in A.3.10, except for number of SSBs per SS-burst and SS/PBCH block index as below
	Config 2		SSB.1 FR1	
Number of SSBs per SS-burst			2	Different from the definition in A.3.10
SS/PBCH block index			0,1	Different from the definition in A.3.10
Duplex Mode for Cell 1	Config 1		TDD	
	Config 2		HD-FDD	
TDD Configuration	Config 1		TDDConf.2.1	
CSI-RS for tracking	Config 1		TRS.1.2 TDD	

OCNG Pattern ^{Note 1}		Config 2		TRS.1.1 FDD	As defined in A.3.2.1.
PDSCH parameters ^{Note 4}	Config 1			SR.2.1 TDD	As defined in A.3.1.1.
	Config 2			SR.1.1 FDD	
RMSI CORESET Reference Channel	Config 1			CR.2.1 TDD	
	Config 2			CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1			CCR.2.1 TDD	
	Config 2			CCR.1.1 FDD	
NR RF Channel Number				1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH_DMRS to SSS			dB		
EPRE ratio of PBCH to PBCH_DMRS			dB		
EPRE ratio of PDCCH_DMRS to SSS			dB		
EPRE ratio of PDCCH to PDCCH_DMRS			dB		
EPRE ratio of PDSCH_DMRS to SSS			dB		
EPRE ratio of PDSCH to PDSCH_DMRS			dB		
msgA-RSRP-ThresholdSSB				RSRP_51	The actual value of the threshold is -105dBm, as defined in TS 38.331 [2].
SSB with index 0	$\hat{E}_s / I_{ot}$		dB	3	Power of SSB with index 0 is set to be above configured msgA-RSRP-ThresholdSSB
	N_{oc}	Config 1	dBm/15kHz	-101	
		Config 2		-98	
	$\hat{E}_s / N_{oc}$		dB	3	
	SS-RSRP ^{Note 3}		dBm/ SCS	-95	
SSB with index 1	$\hat{E}_s / I_{ot}$		dB	-17	Power of SSB with index 1 is set to be below configured msgA-RSRP-ThresholdSSB
	N_{oc}	Config 1	dBm/15kHz	-101	
		Config 2		-98	
	$\hat{E}_s / N_{oc}$		dB	-17	
	SS-RSRP ^{Note 3}		dBm/ SCS	-115	
I_0 ^{Note 2}		Config 1	dBm	-65.3/9.36MHz	For symbols without SSB index 1
		Config 2		-65.38/18.36 MHz	
ss-PBCH-BlockPower			dBm/ SCS	-5	As defined in clause 6.3.2 in TS 38.331 [2].
Configured UE transmitted power ($P_{C\text{MAX}, f, c}$)			dBm	23	As defined in clause 6.2.4 in TS 38.101-1.
MsgA Configuration				FR1 MsgA configuration 2	As defined in A.3.20.2.2.
Propagation Condition			-	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.					
Note 2: SS-RSRP, Es/Iot and Io levels have been derived from other parameters for information purpose. They are not settable parameters.					
Note 3: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.					

A.16.3.2.2.8.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.16.3.2.2.8.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.2.1, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA PRACH on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA preamble for test configuration 1 and 3dB lower than the first MsgA preamble for test configuration 2 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.8.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.2.2 the System Simulator shall transmit a MsgB containing a fallbackRAR containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. In response to the first 4 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 containing the payload of MsgA PUSCH if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble. The UE shall monitor contention resolution as described in clause 8.2A in TS 38.213 [3].

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA preamble for test configuration 1 and 3dB lower than the first MsgA preamble for test configuration 2 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA and msg3 transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.2.8.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.2.3 the System Simulator shall transmit a MsgB containing a successRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 5 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 4 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be -22 dBm with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA preamble for test configuration 1 and 3dB lower than the first MsgA preamble for test configuration 2 with an accuracy specified in clause 6.3.4.2 of TS 38.101-1 [18]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-1 [18].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.16.3.2.3 SA: RRC Connection Release with Redirection

A.16.3.2.3.1 Redirection from NR in FR1 to NR in FR1 for 1 Rx UE

A.16.3.2.3.1.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to NR requirements specified in clause 6.2.3A.2.1.

A.16.3.2.3.1.2 Test Parameters

Supported test configurations are shown in table A.16.3.2.3.1.2-1. The time delay is tested by using the parameters in table A.16.3.2.3.1.2-2, and A.16.3.2.3.1.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2. Cell 1 and Cell 2 belong to different tracking areas.

Table A.16.3.2.3.1.2-1: Redirection from NR to NR test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.2.3.1.2-2: General test parameters for Redirection from NR to NR test case

Parameter	Unit	Value	Comment
Initial conditions	Active cell		Cell 1
	Neighbouring cell		Cell 2
Final condition	Active cell		Cell 2
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	2.3	

Table A.16.3.2.3.1.2-3: Cell specific test parameters for Redirection from NR to NR test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2, 3		TDD			
	Config 4		HD-FDD			
SSB Configuration	Config 1		SSB.1 FR1			
	Config 2		SSB.1 FR1			
	Config 3		SSB.1 RedCap FR1			
	Config 4		SSB.1 FR1			
CSI-RS for tracking	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
	Config 4		TRS.1.1 FDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
	Config 4		Not Applicable			
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		20: N _{RB,c} = 51			
	Config 4		10: N _{RB,c} = 52			
BWP BW	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RB,c} = 52			
	Config 3		20: N _{RB,c} = 51			
	Config 4		10: N _{RB,c} = 52			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
	Config 4		SR.1.1 FDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR.2.1 TDD			
	Config 4		CR.1.1 FDD			
OCNG Patterns			OCNG pattern 1			
SMTc configuration	Config 1, 2, 4		SMTc.1 FR1			
	Config 3		SMTc.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						

EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}		dBm/15kHz z	-98			
N_{oc}^{Note2}	Config 1, 2, 4	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s/I_{ot}$		dB	4	4	-infinity	4
$\hat{E}_s/N_{oc}$		dB	4	4	-infinity	4
I_o^{Note3}	Config 1,2, 4	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-64.59
	Config 3	dBm/ 18.36MHz	-61.66	-61.66	-67.12	-61.66
Propagation condition		-	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.16.3.2.3.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2240 ms from the beginning of time period T2.
The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{\text{connection_release_redirect_NR}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-NR}} + T_{\text{SI-NR}} + T_{\text{RACH}},$$

where:

$T_{\text{RRC_procedure_delay}} = 110$ ms in the test.

$T_{\text{identify-NR}} = 680$ ms in the test.

$T_{\text{SI-NR}} = 1280$ ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

$T_{\text{RACH}} = 170$ ms in the test.

This gives a total of 2240 ms.

A.16.3.2.3.2 Redirection from NR in FR1 to NR in FR1 for 2 Rx UE

A.16.3.2.3.2.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to NR requirements specified in clause 6.2.3A.2.1.

A.16.3.2.3.2.2 Test Parameters

Supported test configurations are shown in table A.16.3.2.3.2.2-1. The time delay is tested by using the parameters in table A.16.3.2.3.2.2-2, and A.16.3.2.3.2.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2. Cell 1 and Cell 2 belong to different tracking areas.

Table A.16.3.2.3.2.2-1: Redirection from NR to NR test configurations

Config	Description
1	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	Source cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode Target cell: NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	Source cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode Target cell: NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.2.3.2.2-2: General test parameters for Redirection from NR to NR test case

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	2.3	

Table A.16.3.2.3.2.2-3: Cell specific test parameters for Redirection from NR to NR test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
NR RF Channel Number			1		2	
Duplex mode	Config 1		FDD			
	Config 2, 3		TDD			
	Config 4		HD-FDD			
SSB Configuration	Config 1		SSB.1 FR1			
	Config 2		SSB.1 FR1			
	Config 3		SSB.1 RedCap FR1			
	Config 4		SSB.1 FR1			
CSI-RS for tracking	Config 1		TRS.1.1 FDD			
	Config 2		TRS.1.1 TDD			
	Config 3		TRS.1.2 TDD			
	Config 4		TRS.1.1 FDD			
TDD configuration	Config 1		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
	Config 4		Not Applicable			
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52			
	Config 2		10: N _{RR,c} = 52			

	Config 3		20: $N_{RB,c} = 51$			
	Config 4		10: $N_{RB,c} = 52$			
BWP BW	Config 1	MHz	10: $N_{RB,c} = 52$			
	Config 2		10: $N_{RB,c} = 52$			
	Config 3		20: $N_{RB,c} = 51$			
	Config 4		10: $N_{RB,c} = 52$			
DRX Cycle		ms	Not Applicable			
PDSCH Reference measurement channel	Config 1		SR.1.1 FDD			
	Config 2		SR.1.1 TDD			
	Config 3		SR2.1 TDD			
	Config 4		SR.1.1 FDD			
CORESET Reference Channel	Config 1		CR.1.1 FDD			
	Config 2		CR.1.1 TDD			
	Config 3		CR2.1 TDD			
	Config 4		CR.1.1 FDD			
OCNG Patterns			OCNG pattern 1			
SMTC configuration	Config 1, 2, 4		SMTC.1 FR1			
	Config 3		SMTC.2 FR1			
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4	kHz	15 kHz			
	Config 3		30 kHz			
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz			
	Config 3		30 kHz			
PRACH configuration			FR1 PRACH configuration 1			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0			
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}		dBm/15kHz	-98			
N_{oc}^{Note2}	Config 1, 2, 4	dBm/SCS	-98			
	Config 3		-95			
$\hat{E}_s/I_{ot}$		dB	4	4	-infinity	4
$\hat{E}_s/N_{oc}$		dB	4	4	-infinity	4
I_o^{Note3}	Config 1,2, 4	dBm/ 9.36MHz	-64.59	-64.59	-70.05	-64.59
	Config 3	dBm/ 18.36MHz	-61.66	-61.66	-67.12	-61.66
Propagation condition		-	AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						

- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.3.2.3.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2240 ms from the beginning of time period T2.
The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{\text{connection_release_redirect_NR}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-NR}} + T_{\text{SI-NR}} + T_{\text{RACH}},$$

where:

$T_{\text{RRC_procedure_delay}} = 110$ ms in the test.

$T_{\text{identify-NR}} = 680$ ms in the test.

$T_{\text{SI-NR}} = 1280$ ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

$T_{\text{RACH}} = 170$ ms in the test.

This gives a total of 2240 ms.

A.16.3.2.3.3 Redirection from NR in FR1 to E-UTRAN for 1 Rx UE

A.16.3.2.3.3.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to E-UTRAN requirements specified in clause 6.2.3A.2.2.

A.16.3.2.3.3.2 Test Parameters

Supported test configurations are shown in table A.16.3.2.3.3.2-1. The time delay is tested by using the parameters in table A.16.3.2.3.3.2-2, A.16.3.2.3.3.2-3 and A.16.3.2.3.3.2-4.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.16.3.2.3.3.2-1: Redirection from NR to E-UTRAN test configurations

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.2.3.3.2-2: General test parameters for Redirection from NR to E-UTRAN test case

Parameter		Unit	Value	Comment
Initial conditions	Active cell		Cell 1	
	Neighbouring cell		Cell 2	
Final condition	Active cell		Cell 2	
Filter coefficient			0	L3 filtering is not used
Access Barring Information		-	Not Sent	No additional delays in random access procedure.
Time offset between cells			3 μ s	Synchronous cells
T1		s	5	
T2		s	2.3	

Table A.16.3.2.3.3.2-3: Cell specific test parameters for Redirection from NR to E-UTRAN (cell 1)

Parameter		Unit	Cell 1	
			T1	T2
RF Channel Number			1	
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
	Config 7, 8		HD-FDD	
SSB Configuration	Config 1,2,4,5,7,8		SSB.1 FR1	
	Config 3,6		SSB.1 RedCap FR1	
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD	
	Config 2, 5		TRS.1.1 TDD	
	Config 3, 6		TRS.1.2 TDD	
	Config 7,8		TRS.1.1 FDD	
TDD configuration	Config 1,4, 7, 8		Not Applicable	
	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52	
	Config 2,5		10: N _{RB,c} = 52	
	Config 3,6		20: N _{RB,c} = 51	
	Config 7,8		10: N _{RB,c} = 52	
BWP BW	Config 1,4	MHz	10: N _{RB,c} = 52	
	Config 2,5		10: N _{RB,c} = 52	
	Config 3,6		20: N _{RB,c} = 51	
	Config 7,8		10: N _{RB,c} = 52	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR2.1 TDD	
	Config 7,8		SR.1.1 FDD	
CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR2.1 TDD	
	Config 7,8		CR.1.1 FDD	
OCNG Patterns			OCNG pattern 1	
SMTc configuration	Config 1,2,4,5,7,8		SMTc.1 FR1	
	Config 3,6		SMTc.2 FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6		30 kHz	
PRACH configuration			FR1 PRACH configuration 1	

BWP configuration		Initial DL BWP		DLBWP.0.1	
		Dedicated DL BWP		DLBWP.1.1	
		Initial UL BWP		ULBWP.0.1	
		Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS			dB	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} ^{Note2}			dBm/15kHz z	-98	
N_{oc} ^{Note2}	Config 1,2,4,5,7,8		dBm/SCS	-98	
	Config 3,6			-95	
$\hat{E}_s/I_{ot}$			dB	4	4
$\hat{E}_s/N_{oc}$			dB	4	4
I_o ^{Note3}	Config 1,2,4,5,7,8		dBm/ 9.36MHz	-64.59	-64.59
	Config 3,6		dBm/ 18.36MHz	-61.66	-61.66
Propagation condition			-	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Table A.16.3.2.3.3.2-4: Cell specific test parameters for Redirection from NR to E-UTRAN (cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6, 8	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6, 8	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$	
PRACH Configuration ^{Note2}		1, 2, 3, 7	4	
		4, 5, 6, 8	53	
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD	

PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3, 7	20 MHz: R.3 TDD 5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD					
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD					
OCNG Patterns ^{Note3}		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD					
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD					
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0					
PBCH_RB								
PSS_RA								
SSS_RA								
PCFICH_RB								
PHICH_RA								
PHICH_RB								
PDCCH_RA								
PDCCH_RB								
PDSCH_RA								
PDSCH_RB								
OCNG_RA ^{Note4}								
OCNG_RB ^{Note4}								
N _{oc} ^{Note5}					dBm/15kHz	1,2,3,4,5,6,7,8	-98	
$\hat{E}_s/N_{oc}$					dB	1,2,3,4,5,6,7,8	-Infinity	4
$\hat{E}_s/I_{ot}$ ^{Note6}	dB	1,2,3,4,5,6,7,8	-Infinity	4				
RSRP ^{Note6}	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-94				
SCH_RP ^{Note6}	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity	-94				
I _o ^{Note6}	dBm/9MHz	1,2,3,4,5,6,7,8	-70.22	-64.76				
Propagation Condition		1,2,3,4,5,6,7,8	AWGN					
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].							
Note 2:	PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].							
Note 3:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.							
Note 4:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 5:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.							
Note 6:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 7:	Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].							

A.16.3.2.3.3.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2205 ms from the beginning of time period T2.

The rate of correct RRC connection release redirection to E-UTRAN observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{\text{connection_release_redirect_E-UTRA}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-E-UTRA}} + T_{\text{SI-E-UTRA}} + T_{\text{RACH}},$$

where:

$$T_{\text{RRC_procedure_delay}} = 110 \text{ ms in the test.}$$

$T_{\text{identify-E-UTRA}} = 800$ ms in the test.

$T_{\text{SI-E-UTRA}} = 1280$ ms, it is the time required for receiving all the relevant system information as defined in TS 36.331 for the target E-UTRA cell.

$T_{\text{RACH}} = 15$ ms in the test.

This gives a total of 2205 ms.

A.16.3.2.3.4 Redirection from NR in FR1 to E-UTRAN for 2 Rx UE

A.16.3.2.3.4.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to E-UTRAN requirements specified in clause 6.2.3A.2.2.

A.16.3.2.3.4.2 Test Parameters

Supported test configurations are shown in table A.16.3.2.3.4.2-1. The time delay is tested by using the parameters in table A.16.3.2.3.4.2-2, A.16.3.2.3.4.2-3 and A.16.3.2.3.4.2-4.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.16.3.2.3.4.2-1: Redirection from NR to E-UTRAN test configurations

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.3.2.3.4.2-2: General test parameters for Redirection from NR to E-UTRAN test case

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	2.3	

Table A.16.3.2.3.4.2-3: Cell specific test parameters for Redirection from NR to E-UTRAN (cell 1)

Parameter		Unit	Cell 1	
			T1	T2
RF Channel Number			1	
Duplex mode	Config 1,4		FDD	

	Config 2,3,5,6		TDD
	Config 7, 8		HD-FDD
SSB Configuration	Config 1,2,4,5,7,8		SSB.1 FR1
	Config 3,6		SSB.1 RedCap FR1
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
	Config 7,8		TRS.1.1 FDD
TDD configuration	Config 1,4, 7, 8		Not Applicable
	Config 2,5		TDDConf.1.1
	Config 3,6		TDDConf.2.1
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52
	Config 2,5		10: N _{RB,c} = 52
	Config 3,6		20: N _{RB,c} = 51
	Config 7,8		10: N _{RB,c} = 52
BWP BW	Config 1,4	MHz	10: N _{RB,c} = 52
	Config 2,5		10: N _{RB,c} = 52
	Config 3,6		20: N _{RB,c} = 51
	Config 7,8		10: N _{RB,c} = 52
DRX Cycle		ms	Not Applicable
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2,5		SR.1.1 TDD
	Config 3,6		SR.2.1 TDD
	Config 7,8		SR.1.1 FDD
CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2,5		CR.1.1 TDD
	Config 3,6		CR.2.1 TDD
	Config 7,8		CR.1.1 FDD
OCNG Patterns			OCNG pattern 1
SMTc configuration	Config 1,2,4,5,7,8		SMTc.1 FR1
	Config 3,6		SMTc.2 FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz
	Config 3,6		30 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz
	Config 3,6		30 kHz
PRACH configuration			FR1 PRACH configuration 1
BWP configuration	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N _{oc} ^{Note2}		dBm/15kHz	-98
N _{oc} ^{Note2}	Config 1,2,4,5,7,8	dBm/SCS	-98

	Config 3,6		-95	
$\hat{E}_s/I_{ot}$		dB	4	4
$\hat{E}_s/N_{oc}$		dB	4	4
Io ^{Note3}	Config 1,2,4,5,7,8	dBm/ 9.36MHz	-64.59	-64.59
	Config 3,6	dBm/ 18.36MHz	-61.66	-61.66
Propagation condition		-	AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.16.3.2.3.4.2-4: Cell specific test parameters for Redirection from NR to E-UTRAN (cell 2)

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6, 8	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6, 8	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PRACH Configuration ^{Note2}		1, 2, 3, 7	4	
		4, 5, 6, 8	53	
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note3}		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				

PHICH_RA			
PHICH_RB			
PDCCH_RA			
PDCCH_RB			
PDSCH_RA			
PDSCH_RB			
OCNG_RA ^{Note4}			
OCNG_RB ^{Note4}			
N _{oc} ^{Note5}	dBm/15kHz	1,2,3,4,5,6,7,8	-98
$\bar{E}_s/N_{oc}$	dB	1,2,3,4,5,6,7,8	-Infinity 4
$\bar{E}_s/I_{ot}$ ^{Note6}	dB	1,2,3,4,5,6,7,8	-Infinity 4
RSRP ^{Note6}	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity -94
SCH_RP ^{Note6}	dBm/15kHz	1,2,3,4,5,6,7,8	-Infinity -94
I _o ^{Note6}	dBm/9MHz	1,2,3,4,5,6,7,8	-70.22 -64.76
Propagation Condition		1,2,3,4,5,6,7,8	AWGN
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23]. Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23]. Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively. Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 6: $\bar{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].			

A.16.3.2.3.4.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2205 ms from the beginning of time period T2.

The rate of correct RRC connection release redirection to E-UTRAN observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{\text{connection_release_redirect_E-UTRA}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-E-UTRA}} + T_{\text{SI-E-UTRA}} + T_{\text{RACH}},$$

where:

$T_{\text{RRC_procedure_delay}} = 110$ ms in the test.

$T_{\text{identify-E-UTRA}} = 800$ ms in the test.

$T_{\text{SI-E-UTRA}} = 1280$ ms, it is the time required for receiving all the relevant system information as defined in TS 36.331 for the target E-UTRA cell.

$T_{\text{RACH}} = 15$ ms in the test.

This gives a total of 2205 ms.

A.16.4 Timing for RedCap

A.16.4.1 UE transmit timing

A.16.4.1.1 NR UE Transmit Timing Test for FR1 for 1Rx RedCap UE

A.16.4.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeB and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1A.2.

Supported test configurations are shown in Table A.16.4.1.1.1-1.

Table A.16.4.1.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	NR HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to be tested in one of the supported test configurations	

For this test a single NR cell is used. Table A.16.4.1.1.1-2 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.16.4.1.1.1-3.

Table A.16.4.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1,2,3	Freq1	Freq1
TDD configuration		1	Not Applicable	
		2	TDDConf.1.1	
		3	TDDConf.2.1	
		4	Not Applicable	
BW _{channel}	MHz	1	10: N _{RB,c} = 52	
		2	10: N _{RB,c} = 52	
		3	20: N _{RB,c} = 51	
		4	10: N _{RB,c} = 52	
Initial BWP Configuration		1,2,3,4	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1,2,3,4	DLBWP.1.1 ULBWP.1.1	
DRx Cycle	ms	1,2,3,4	N/A	DRX.8 ^{Note5}
PDSCH Reference measurement channel		1	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
		4	SR.x.x HD-FDD	
RMSI CORESET Reference Channel		1	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
		4	CR.x.x HD-FDD	
Dedicated CORESET Reference Channel		1	CCR.1.1 FDD	
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	

		4	CCR.1.1 FDD	
OCNG Patterns		1,2,3,4	OP.1	
SSB configuration		1,2,4	SSB.1 FR1	
		3	SSB. 1 RedCap FR1	
SMTC Configuration		1,2,4	SMTC.1	
		3	SMTC.2	
TRS configuration		1	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
		4	TRS.1.1 FDD	
EPRE ratio of PSS to SSS	dB	1,2,3,4	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc}^{Note2}	dBm/15 kHz	1,2,3,4	-98	-98
N_{oc}^{Note2}			-98	-98
	dBm/SCS	1,2,4	-98	-98
		3	-95	-95
$\hat{E}_s/I_{ot}$		1,2,3,4	3	3
$\hat{E}_s/N_{oc}$		1,2,3,4	3	3
SS-RSRP ^{Note3}	dBm/SCS	1,2,4	-95	-95
		3	-92	-92
I_o^{Note3}	dBm/9.36MHz	1,2,4	-65.2	-65.2
	dBm/18.36MHz	3	-62.36	-62.36
Propagation condition		1,2,3,4	AWGN	
SRS Config		1,2,4	SRSCConf.1 ^{Note6}	SRSCConf.3 ^{Note6}
		3	SRSCConf.1 ^{Note6}	SRSCConf.2 ^{Note6}
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: DRx related parameters are given in Table A.3.3.8-1 Note 6: SRS configs are given in Table A.16.4.1.1.1-3				

Table A.16.4.1.1.1-3: SRS Configuration for Timing Accuracy Test

	Field	SRSCConf.1	SRSCConf.2	SRSCConf.3	Comments
--	-------	------------	------------	------------	----------

SRS-ResourceSet	srs-ResourceSetId	0	0	0	
	srs-ResourceIdList	0	0	0	
	resourceType	Periodic	Periodic	Periodic	
	Usage	Codebook	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	0	
	nrofSRS-Ports	Port1	Port1	Port1	
	transmissionComb	n2	n2	n2	
	combOffset-n2	0	0	0	
	cyclicShift-n2	0	0	0	
	resourceMapping startPosition	0	0	0	
	resourceMapping nrofSymbols	n1	n1	n1	
	resourceMapping repetitionFactor	n1	n1	n1	
	freqDomainPosition	0	0	0	
	freqDomainShift	0	0	0	
	freqHopping c-SRS	12 for test configuration 1,2, 3	12	12	
	freqHopping b-SRS	0	0	0	
	freqHopping b-hop	0	0	0	
	groupOrSequenceHopping	Neither	Neither	Neither	
	resourceType	Periodic	Periodic	Periodic	
	periodicityAndOffset-p	sl1, 0	sl640, 0	sl320, 0	Offset to align with DRx periodicity
	sequenceId	0	0	0	Any 10 bit number

A.16.4.1.1.2 Test requirements

The test requirements are the same as in clause A.6.4.1.1.2.

A.16.4.1.2 NR UE Transmit Timing Test for FR1 for 2Rx RedCap UE

A.16.4.1.2.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeB and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1A.2.

Supported test configurations are shown in Table A.16.4.1.2.1-1.

Table A.16.4.1.2.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	NR FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	NR TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	NR TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	NR HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note:	The UE is only required to be tested in one of the supported test configurations

For this test a single NR cell is used. Table A.16.4.1.2.1-2 defines the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.16.4.1.1.1-3.

Table A.16.4.1.2.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1,2,3,4	Freq1	Freq1
TDD configuration		1	Not Applicable	
		2	TDDConf.1.1	
		3	TDDConf.2.1	
		4	Not Applicable	
BW _{channel}	MHz	1	10: N _{RB,c} = 52	
		2	10: N _{RB,c} = 52	
		3	20: N _{RB,c} = 51	
		4	10: N _{RB,c} = 52	
Initial BWP Configuration		1,2,3,4	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1,2,3,4	DLBWP.1.1 ULBWP.1.1	
DRx Cycle	ms	1,2,3,4	N/A	DRX.8 ^{Note5}
PDSCH Reference measurement channel		1	SR.1.1 FDD	
		2	SR.1.1 TDD	
		3	SR.2.1 TDD	
		4	SR.1.1 FDD	
RMSI CORESET Reference Channel		1	CR.1.1 FDD	
		2	CR.1.1 TDD	
		3	CR.2.1 TDD	
		4	CR.1.1 FDD	
Dedicated CORESET Reference Channel		1	CCR.1.1 FDD	
		2	CCR.1.1 TDD	
		3	CCR.2.1 TDD	
		4	CCR.1.1 FDD	
OCNG Patterns		1,2,3,4	OP.1	
SSB configuration		1,2,4	SSB.1 FR1	
		3	SSB. 1 RedCap FR1	
SMTC Configuration		1,2,4	SMTC.1	
		3	SMTC.2	
TRS configuration		1	TRS.1.1 FDD	
		2	TRS.1.1 TDD	
		3	TRS.1.2 TDD	
		4	TRS.1.1 FDD	
EPRE ratio of PSS to SSS	dB	1,2,3,4	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				

EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note2}	dBm/15 kHz	1,2,3,4	-98	-98
N_{oc} ^{Note2}	dBm/SCS	1,2,4	-98	-98
		3	-95	-95
$\hat{E}_s / I_{ot}$		1,2,3,4	3	3
$\hat{E}_s / N_{oc}$		1,2,3,4	3	3
SS-RSRP ^{Note3}	dBm/SCS	1,2,4	-95	-95
		3	-92	-92
I_o ^{Note3}	dBm/9.36MHz	1,2,4	-65.2	-65.2
	dBm/18.36MHz	3	-62.36	-62.36
Propagation condition		1,2,3,4	AWGN	
SRS Config		1,2,4	SRSCConf.1 ^{Note6}	SRSCConf.3 ^{Note6}
		3	SRSCConf.1 ^{Note6}	SRSCConf.2 ^{Note6}
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: DRx related parameters are given in Table A.3.3.8-1 Note 6: SRS configs are given in Table A.16.4.1.1.1-3				

A.16.4.1.2.2 Test requirements

The test requirements are the same as in clause A.6.4.1.1.2.

A.16.4.2 UE timer accuracy

A.16.4.3 Timing advance

A.16.4.3.1 SA FR1 timing advance adjustment accuracy for 1 Rx UE

A.16.4.3.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3A.

A.16.4.3.1.2 Test Parameters

Supported test configurations are shown in table A.16.4.3.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.16.4.3.1.2-2, A.16.4.3.1.2-3 and A.16.4.3.1.2-4.

In all test cases, single cell is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.16.4.3.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in Clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to Clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.16.4.3.1.2-2. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3.2.1, the UE adjusts its uplink timing at slot $n+k$ for a timing advance command received in slot n . This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.16.4.3.1.2-1: Timing advance supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.4.3.1.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 15 kHz SCS $N_{TA_new} = N_{TA_old} + 8192 \cdot T_c$ For 30 kHz SCS $N_{TA_new} = N_{TA_old} + 4096 \cdot T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.16.4.3.1.2-3: Cell specific test parameters for timing advance

Parameter		Unit	Test1	
			T1	T2
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
	Config 4		HD-FDD	
TDD configuration	Config 1,4		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
BW _{channel}	Config 1,4	MHz	10: N _{RB,C} = 52	

	Config 2		10: $N_{RB,c} = 52$
	Config 3		20: $N_{RB,c} = 51$
BWP BW	Config 1,4	MHz	10: $N_{RB,c} = 52$
	Config 2		10: $N_{RB,c} = 52$
	Config 3		20: $N_{RB,c} = 51$
DRX Cycle		ms	Not Applicable
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
OCNG Patterns			OCNG pattern 1
SMTTC configuration	Config 1,2,4		SMTTC.1 FR1
	Config 3		SMTTC.2 FR1
SSB configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz
	Config 3		30 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz
	Config 3		30 kHz
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} ^{Note2}		dBm/15kHz	-98
N_{oc} ^{Note2}	Config 1,2,4	dBm/SCS	-98
	Config 3		-95
$\hat{E}_s / I_{ot}$		dB	3
$\hat{E}_s / N_{oc}$		dB	3
I_o ^{Note3}	Config 1,2,4	dBm/9.36MHz	-67.57
	Config 3	dBm/18.36MHz	-65.76
Propagation condition		-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Note 3: lo levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.4.3.1.2-4: Sounding Reference Symbol Configuration for timing advance

Field		Value	Comment
c-SRS	Config 1,2,4	12	Frequency hopping is disabled
	Config 3	12	
b-SRS		0	
b-hop		0	
freqDomainPosition		0	Frequency domain position of SRS
freqDomainShift		0	
groupOrSequenceHopping		neither	No group or sequence hopping
SRS-PeriodicityAndOffset		sl5=2 for SCS 15kHz sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS		ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage		Codebook	Codebook based UL transmission
startPosition		0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols		n1	
repetitionFactor		n1	
combOffset-n2		0	
cyclicShift-n2		0	transmissionComb setting
nrofSRS-Ports		port1	Number of antenna ports used for SRS transmission
Note:	For further information see clause 6.3.2 in TS 38.331 [2].		

A.16.4.3.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. $k+1$ slots after the reception of the timing advance command, where $k=5$.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.16.4.3.2 SA FR1 timing advance adjustment accuracy for 2 Rx UE

A.16.4.3.2.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3A.

A.16.4.3.2.2 Test Parameters

Supported test configurations are shown in table A.16.4.3.2.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.16.4.3.2.2-2, A.16.4.3.2.2-3 and A.16.4.3.2.2-4.

In all test cases, single cell is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.16.4.3.2.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in Clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to Clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.16.4.3.2.2-2. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3.2.1, the UE adjusts its uplink timing at slot $n+k$ for a timing advance command received in slot n . This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.16.4.3.2.2-1: Timing advance supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.4.3.2.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 15 kHz SCS $N_{TA_new} = N_{TA_old} + 8192 \cdot T_c$ For 30 kHz SCS $N_{TA_new} = N_{TA_old} + 4096 \cdot T_c$ (based on equation in clause 4.2 of TS 38.213 [3])
T1	s	5	
T2	s	5	

Table A.16.4.3.2.2-3: Cell specific test parameters for timing advance

Parameter		Unit	Test1	
			T1	T2
Duplex mode	Config 1		FDD	
	Config 2,3		TDD	
	Config 4		HD-FDD	
TDD configuration	Config 1,4		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
BW _{channel}	Config 1,4	MHz	10: N _{RB,C} = 52	

	Config 2		10: $N_{RB,c} = 52$
	Config 3		20: $N_{RB,c} = 51$
BWP BW	Config 1,4	MHz	10: $N_{RB,c} = 52$
	Config 2		10: $N_{RB,c} = 52$
	Config 3		20: $N_{RB,c} = 51$
DRX Cycle		ms	Not Applicable
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR2.1 TDD
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
TRS configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
OCNG Patterns			OCNG pattern 1
SMTC configuration	Config 1,2,4		SMTTC.1 FR1
	Config 3		SMTTC.2 FR1
SSB configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz
	Config 3		30 kHz
PUCCH/PUSCH subcarrier spacing	Config 1,2,4	kHz	15 kHz
	Config 3		30 kHz
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} ^{Note2}		dBm/15kHz	-98
N_{oc} ^{Note2}	Config 1,2,4	dBm/SCS	-98
	Config 3		-95
$\hat{E}_s / I_{ot}$		dB	3
$\hat{E}_s / N_{oc}$		dB	3
I_o ^{Note3}	Config 1,2,4	dBm/9.36MHz	-67.57
	Config 3	dBm/18.36MHz	-65.76
Propagation condition		-	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			

Note 3: lo levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.4.3.2.2-4: Sounding Reference Symbol Configuration for timing advance

Field		Value	Comment
c-SRS	Config 1,2,4	12	Frequency hopping is disabled
	Config 3	12	
b-SRS		0	Frequency domain position of SRS
b-hop		0	
freqDomainPosition		0	Frequency domain position of SRS
freqDomainShift		0	
groupOrSequenceHopping		neither	No group or sequence hopping
SRS-PeriodicityAndOffset		sl5=2 for SCS 15kHz sl5=4 for SCS 30kHz	Once every 5 slots
pathlossReferenceRS		ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage		Codebook	Codebook based UL transmission
startPosition		0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols		n1	
repetitionFactor		n1	
combOffset-n2		0	
cyclicShift-n2		0	transmissionComb setting
nrofSRS-Ports		port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].			

A.16.4.3.2.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. $k+1$ slots after the reception of the timing advance command, where $k=5$.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.16.5 Signalling characteristics for RedCap

A.16.5.1 Radio link Monitoring

A.16.5.1.1 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE

A.16.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the 1Rx RedCap UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell for 1Rx RedCap UE. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1B.2.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to '*rlf*'. Supported test configurations are shown in table A.16.5.1.1.1-1. The test

parameters are given in Tables A.16.5.1.1.1-2, A.16.5.1.1.1-3, and A.16.5.1.1.1-4 below. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.16.5.1.1 .1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.16.5.1.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note:	The UE is only required to pass in one of the supported test configurations in FR1

Table A.16.5.1.1.1-2: General test parameters for FR1 out-of-sync testing in non-DRX mode for 1 Rx UE

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
BW _{channel}	Config 1, 4	MHz	10: N _{RB,c} = 52
	Config 2		10: N _{RB,c} = 52
	Config 3		20: N _{RB,c} = 51
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
TDD Configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.3.2 FDD
	Config 2		CCR.4.2 TDD
	Config 3		CCR.5.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz

PRACH Configuration	Config 1, 2, 4		Table A.3.8.2.1-1
	Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x1 low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.88
T3		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.1.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode for 1 Rx UE

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS	dB	4		
EPRE ratio of PDCCH to PDCCH DMRS	dB	0		
EPRE ratio of PBCH DMRS to SSS	dB	0		
EPRE ratio of PBCH to PBCH DMRS	dB			
EPRE ratio of PSS to SSS	dB			
EPRE ratio of PDSCH DMRS to SSS	dB			

EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1, 4	dBm/ 15kHz z	-98		
	Config 2		-98		
	Config 3		-98		
N_{oc}	Config 1, 4	dBm/ SCS	-98		
	Config 2		-98		
	Config 3		-95		
Propagation condition			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.					
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.					
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.16.5.1.1 .1-1.					
Note 5: Void					

Table A.16.5.1.1.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode for 1 Rx UE

Field	Test 1
	Value
gapOffset	0
Note: Ensure that RLM RS is partially overlapped with measurement gap	

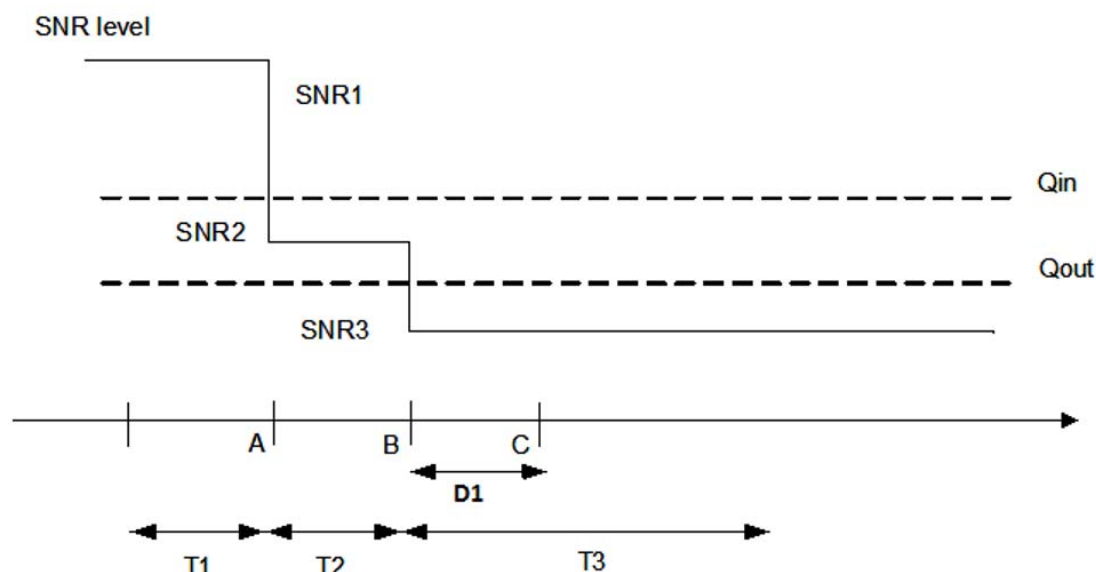


Figure A.16.5.1.1.1-1: SNR variation for out-of-sync testing

A.16.5.1.1.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.2 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE

A.16.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell for 2Rx RedCap UE. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1B.2.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.16.5.1.2.1-1. The test parameters are given in Tables A.16.5.1.2.1-2, A.16.5.1.2.1-3, and A.16.5.1.2.1-4 below. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.16.5.1.2.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. The UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.16.5.1.2.1-1: Supported test configurations for FR1 PCell for 2 Rx Redcap UE

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.2.1-2: General test parameters for FR1 out-of-sync testing in non-DRX mode for 2 Rx Redcap UE

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
BW _{channel}	Config 1, 4	MHz	10: N _{RB,C} = 52
	Config 2		10: N _{RB,C} = 52
	Config 3		20: N _{RB,C} = 51
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2, 4		Table A.3.8.2.1-1
	Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal

Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.2.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode for 2 Rx Redcap UE

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15

N_{oc}	Config 1, 4	dBm/ 15kHz z	-98
	Config 2		-98
	Config 3		-98
N_{oc}	Config 1, 4	dBm/ SCS	-98
	Config 2		-98
	Config 3		-95
Propagation condition			TDL-C 300ns 100Hz
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.			
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.			
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.16.5.1.2.1-1.			
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band.			

Table A.16.5.1.2.1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note: Ensure that RLM RS is partially overlapped with measurement gap	

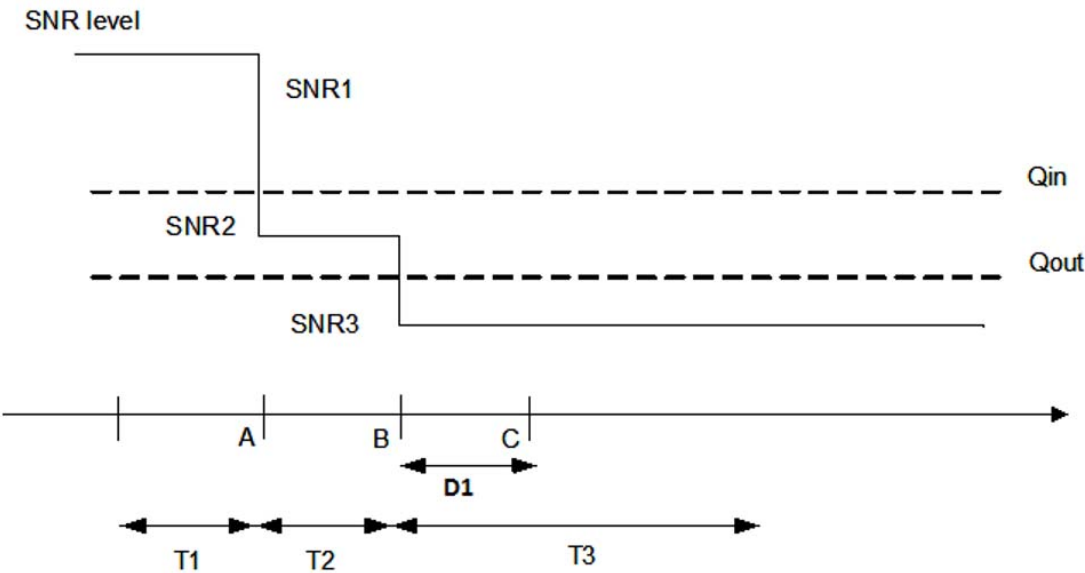


Figure A.16.5.1.2.1-1: SNR variation for out-of-sync testing

A.16.5.1.2.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.3 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 1 Rx UE

A.16.5.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.16.5.1.3.1-1. The test parameters are given in Tables A.16.5.1.3.1-2, and A.16.5.1.3.1-3 below. There is one cell (Cell 1), which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

Table A.16.5.1.3.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.3.1-2: General test parameters for FR1 in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
	Config 4		HD-FDD
BW _{channel}	Config 1,4	MHz	10: N _{RB,C} = 52
	Config 2		10: N _{RB,C} = 52
	Config 3		20: N _{RB,C} = 51
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1

UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
TDD Configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1,4		CCR.3.1 FDD
	Config 2		CCR.4.1 TDD
	Config 3		CCR.5.1 TDD
SSB Configuration	Config 1,4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 3, 4		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2, 3, 4		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x1 Low
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4

	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.44
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.3.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,4	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1, 4	dBm/ 15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
N_{oc}	Config 1, 4	dBm/ SCS	-98				
	Config 2		-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				

Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.16.5.1.3.1-1.
Note 5:	Void.

Table A.16.5.1.3.1-4: Void

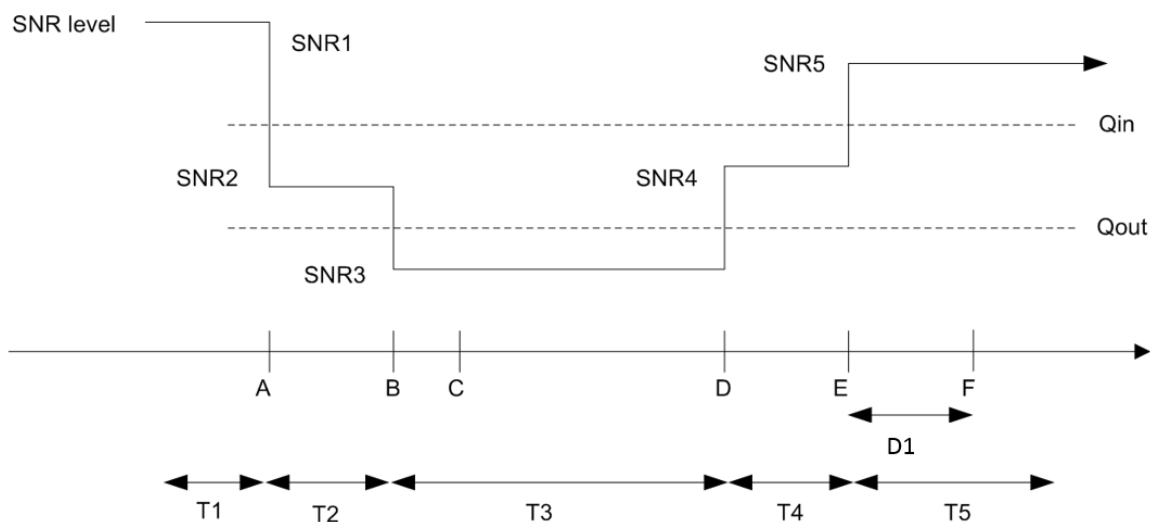


Figure A.16.5.1.3.1-1: SNR variation for in-sync testing

A.16.5.1.3.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.4 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in non-DRX mode for 2 Rx UE

A.16.5.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.16.5.1.4.1-1. The test

parameters are given in Tables A.16.5.1.4.1-2, and A.16.5.1.4.1-3 below. There is one cell (Cell 1), which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.1.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

Table A.16.5.1.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note:	The UE is only required to pass in one of the supported test configurations in FR1

Table A.16.5.1.4.1-2: General test parameters for FR1 in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
BW _{channel}	Config 1, 4	MHz	10: N _{RB,c} = 52
	Config 2		10: N _{RB,c} = 52
	Config 3		20: N _{RB,c} = 51
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTc Configuration	Config 1, 2, 3, 4		SMTc.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz

PRACH Configuration	Config 1, 2, 3, 4		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.24

T4	s	0.2
T5	s	0.88
D1	s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1.		
Note 2: UE-specific PDCCH is not transmitted after T1 starts.		

Table A.16.5.1.4.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1, 4	dBm/ 15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
N_{oc}	Config 1, 4	dBm/ SCS	-98				
	Config 2		-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.						
Note 4:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.16.5.1.4.1-1.						
Note 5:	The SNR values are specified for testing a UE which supports 2RX on at least one band.						

Table A.16.5.1.4.1-4: Void

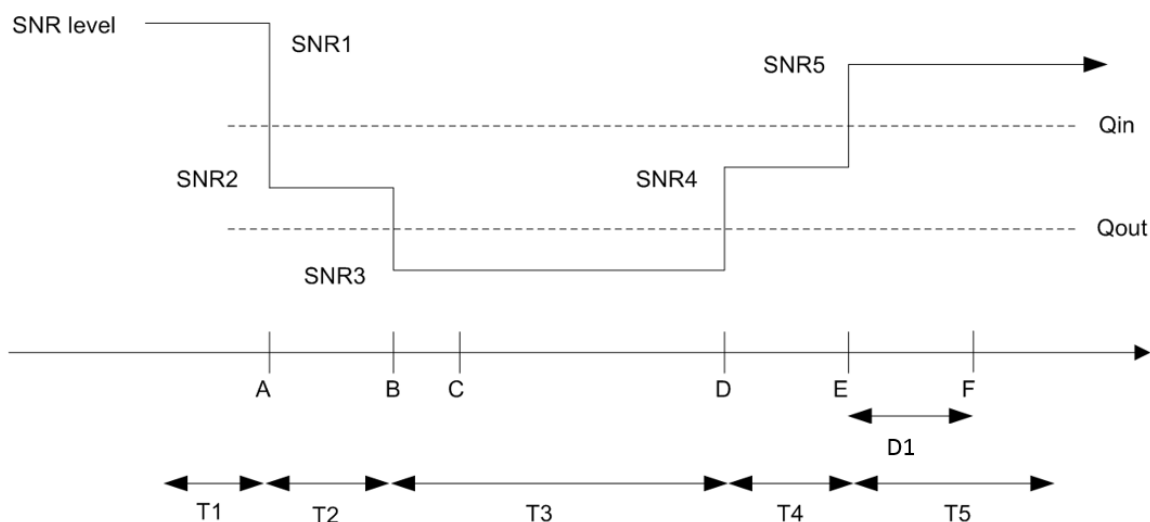


Figure A.16.5.1.4.1-1: SNR variation for in-sync testing

A.16.5.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.5 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE

A.16.5.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to *SSB#0*, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.16.5.1.5.1-1. The test parameters are given in Tables A.16.5.1.5.1-2, and A.16.5.1.5.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.16.5.1.5.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.16.5.1.5.1-1: Supported test configurations for FR1 PCell

Configuration	Description
---------------	-------------

1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.5.1-2: General test parameters for FR1 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
BW _{channel}	Config 1	MHz	10: N _{RB,C} = 52
	Config 2		10: N _{RB,C} = 52
	Config 3		20: N _{RB,C} = 51
	Config 4		10: N _{RB,C} = 52
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
	Config 4		Not Applicable
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.3.2 FDD
	Config 2		CCR.4.2 TDD
	Config 3		CCR.5.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTTC Configuration	Config 1, 2, 4		SMTTC.1
	Config 3		SMTTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2, 4		Table A.3.8.2.1-1

Config 3		Table A.3.8.2.1-1	
SSB index assigned as RLM RS		0	
OCNG parameters		OP.1	
CP length		Normal	
Correlation Matrix and Antenna Configuration		2x1 Low	
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration		DRX.3	
Gap pattern ID		N.A.	
Layer 3 filtering		Enabled	
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.5.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in DRX mode

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS	dB		4	
EPRE ratio of PDCCH to PDCCH DMRS	dB		0	
EPRE ratio of PBCH DMRS to SSS	dB		0	
EPRE ratio of PBCH to PBCH DMRS	dB			

EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1, 4	dBm/15 kHz	-98		
	Config 2		-98		
	Config 3		-98		
N_{oc}	Config 1, 4	dBm/S CS	-98		
	Config 2		-98		
	Config 3		-95		
Propagation condition			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.					
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.					
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.16.5.1.5.1-1.					

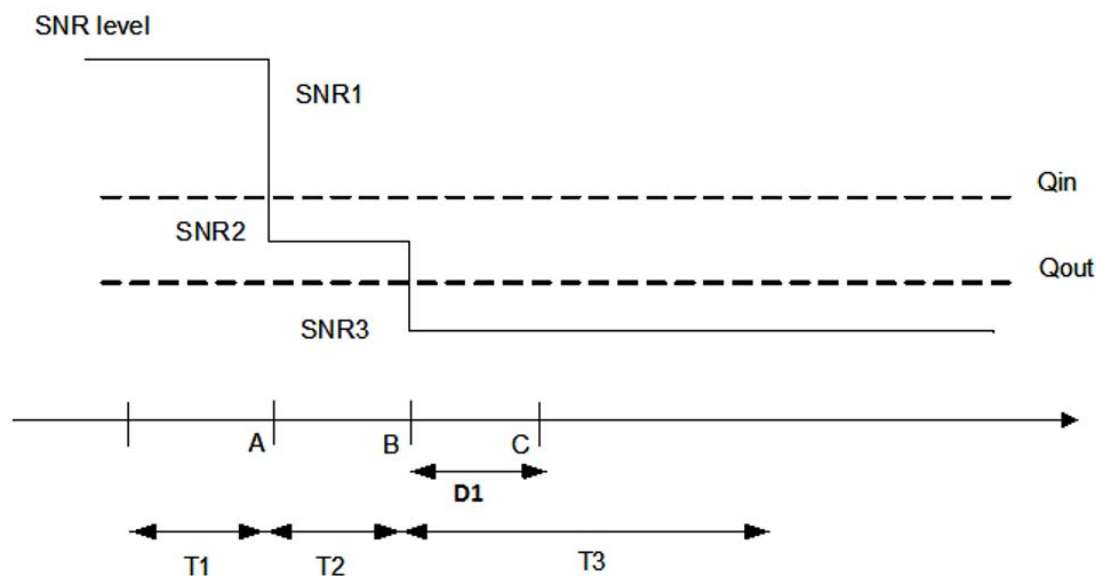


Figure A.16.5.1.5.1-1: SNR variation for out-of-sync testing

A.16.5.1.5.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.6 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE

A.16.5.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.16.5.1.6.1-1. The test parameters are given in Tables A.16.5.1.6.1-2, and A.16.5.1.6.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.16.5.1.6.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.16.5.1.6.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.6.1-2: General test parameters for FR1 out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
BW _{channel}	Config 1	MHz	10: N _{RB,c} = 52
	Config 2		10: N _{RB,c} = 52
	Config 3		20: N _{RB,c} = 51
	Config 4		10: N _{RB,c} = 52
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1

TDD Configuration	Config 1		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
	Config 4		Not Applicable
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTTC Configuration	Config 1, 2, 4		SMTTC.1
	Config 3		SMTTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2, 4		Table A.3.8.2.1-1
	Config 3		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	0
T311 timer		ms	1000

N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.68
T3		s	0.68
D1		s	0.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.6.1-3: Cell specific test parameters for FR1 (Cell 1) for out-of-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB	0		
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1, 4	dBm/15 kHz	-98		
	Config 2		-98		
	Config 3		-98		
N_{oc}	Config 1, 4	dBm/S CS	-98		
	Config 2		-98		
	Config 3		-95		
Propagation condition			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.					
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.					
Note 4: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in Figure A.16.5.1.6.1-1.					
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band.					

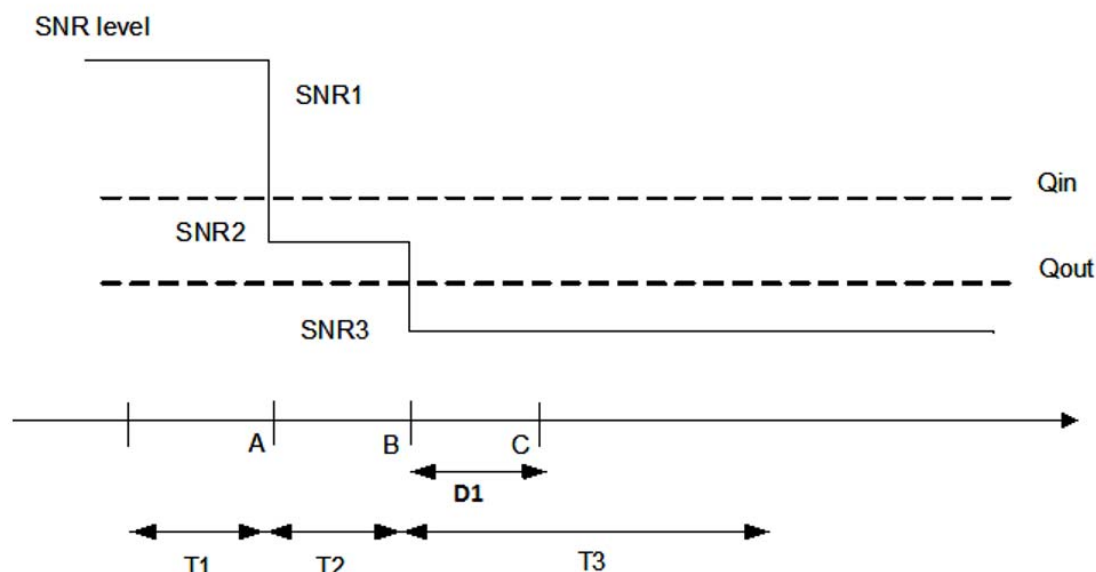


Figure A.16.5.1.6.1-1: SNR variation for out-of-sync testing

A.16.5.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.7 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 1 Rx UE

A.16.5.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.16.5.1.7.1-1. The test parameters are given in Tables A.16.5.1.7.1-2, and A.16.5.1.7.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.1.7.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to

send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.16.5.1.7.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.7.1-2: General test parameters for FR1 in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
BW _{channel}	Config 1, 4	MHz	10: N _{RB,c} = 52
	Config 2		10: N _{RB,c} = 52
	Config 3		20: N _{RB,c} = 51
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.3.1 FDD
	Config 2		CCR.4.1 TDD
	Config 3		CCR.5.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 3, 4		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2, 3, 4		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x1 Low
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8

	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	1.24
T4		s	0.2
T5		s	1.88
D1		s	1.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.7.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB	0				
EPRE ratio of PBCH DMRS to SSS	dB	0				
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					

SNR on RLM-RS	Config 1, 4	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1, 4	dBm/15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
N_{oc}	Config 1, 4	dBm/S CS	-98				
	Config 2		-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.16.5.1.7.1-1.							
Note 5: Void.							

Table A.16.5.1.7.1-4: Void

Table A.16.5.1.7.1-5: Void

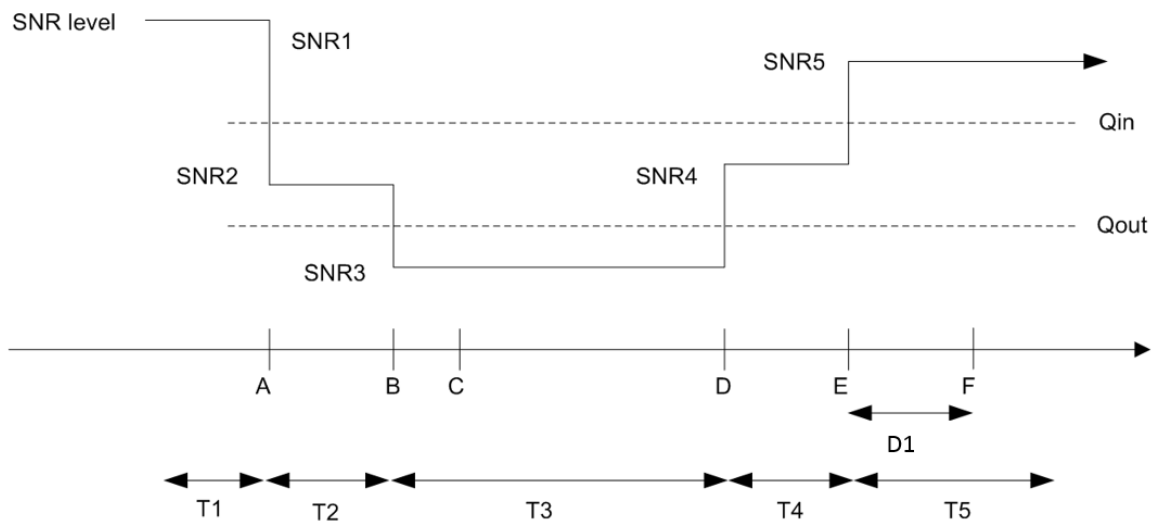


Figure A.16.5.1.7.1-1: SNR variation for in-sync testing.

A.16.5.1.7.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.8 Radio Link Monitoring In-sync Test for FR1 PCell configured with SSB-based RLM RS in DRX mode for 2 Rx UE

A.16.5.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR1 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.16.5.1.8.1-1. The test parameters are given in Tables A.16.5.1.8.1-2, and A.16.5.1.8.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.1.8.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.16.5.1.8.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
2	TDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
3	TDD, SSB SCS 30 kHz, data SCS 30 kHz, BW 20 MHz
4	HD-FDD, SSB SCS 15 kHz, data SCS 15 kHz, BW 10 MHz
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.8.1-2: General test parameters for FR1 in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
BW _{channel}	Config 1, 4	MHz	10: N _{RB,C} = 52
	Config 2		10: N _{RB,C} = 52
	Config 3		20: N _{RB,C} = 51
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD

Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTTC Configuration	Config 1, 2, 3, 4		SMTTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
PRACH Configuration	Config 1, 2, 3, 4		Table A.3.8.2.1-1
SSB index assigned as RLM RS			0
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX Configuration			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
CSI-RS for tracking	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.64

T4	s	0.2
T5	s	0.88
D1	s	0.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1.		
Note 2: UE-specific PDCCH is not transmitted after T1 starts.		

Table A.16.5.1.8.1-3: Cell specific test parameters for FR1 (Cell 1) for in-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1, 4	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N_{oc}	Config 1, 4	dBm/15 kHz	-98				
	Config 2		-98				
	Config 3		-98				
N_{oc}	Config 1, 4	dBm/S CS	-98				
	Config 2		-98				
	Config 3		-95				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 4: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in Figure A.16.5.1.8.1-1.							
Note 5: The SNR values are specified for testing a UE which supports 2RX on at least one band..							

Table A.16.5.1.8.1-4: Void

Table A.16.5.1.8.1-5: Void

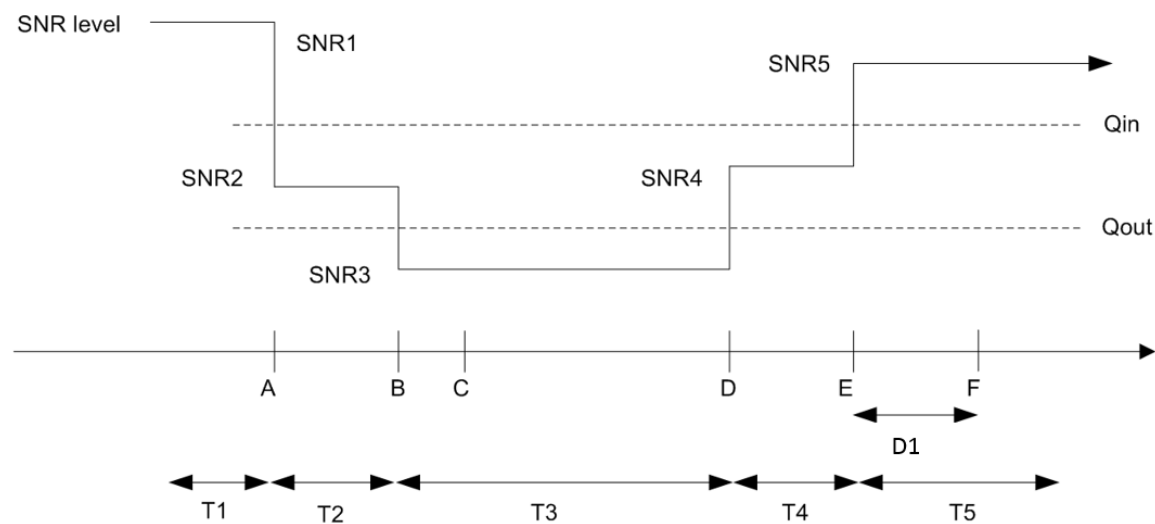


Figure A.16.5.1.8.1-1: SNR variation for in-sync testing.

A.16.5.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.9 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE

A.16.5.1.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used for 1 Rx RedCap UE. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.16.5.1.9.1-1, A.16.5.1.9.1-2, A.16.5.1.9.1-3, and A.16.5.1.9.1-3A below. There is one cell, cell 1 which is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.16.5.1.9.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting of 5ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS.

Table A.16.5.1.9.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.9.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.3.2 FDD
	Config 2		CCR.4.2 TDD
	Config 3		CCR.5.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal

Correlation Matrix and Antenna Configuration			2x1 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.88
T3		s	0.88
D1		s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.9.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB	0		
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB			
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1,4	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15

N_{oc}	Config 1,4	dBm/15kHz	-98
	Config 2		-98
	Config 3		-98
Propagation condition			TDL-C 300ns 100Hz
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.			
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.			
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.			
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.			
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.			
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.			
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.16.5.1.9.1-1.			

Table A.16.5.1.9.1-3A: Measurement gap configuration for FR1 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: Void	

Table A.16.5.1.9.1-4: Void

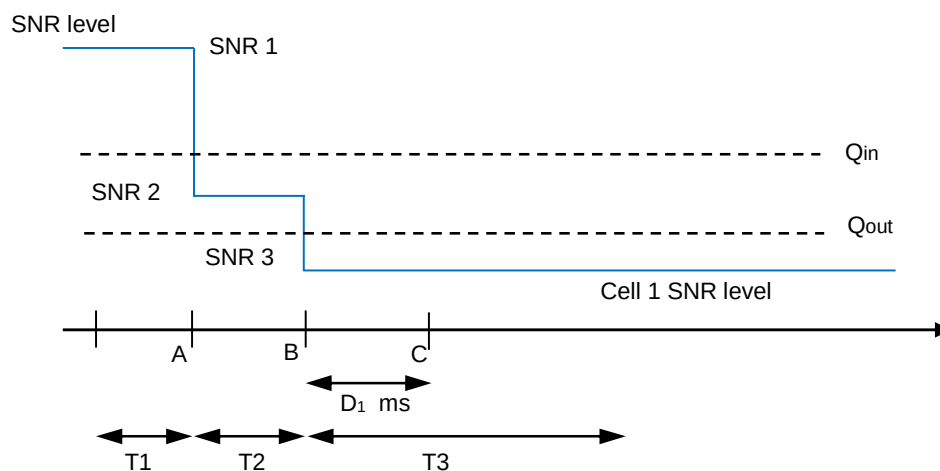


Figure A.16.5.1.9.1-1: SNR variation for CSI-RS out-of-sync testing

A.16.5.1.9.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.10 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE

A.16.5.1.10.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used for 2 Rx RedCap UE. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.16.5.1.10.1-1, A.16.5.1.10.1-2, A.16.5.1.10.1-3, and A.16.5.1.10.1-3A below. There is one cell, cell 1 which is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.16.5.1.10.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting of 5ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS and is not same as RLM-RS to avoid triggering the beam failure during the RLM test.

Table A.16.5.1.10.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.10.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD

Dedicated CORESET Reference Channel	Config 3		CR.2.1 TDD
	Config 1, 4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
SSB index assigned as BFD-RS			0
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.48
T3		s	0.48
D1		s	0.44
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.10.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB	0		
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB			
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1,4		1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N _{oc}	Config 1,4	dBm/15kHz	-98		
	Config 2		-98		
	Config 3		-98		
Propagation condition			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.					
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.					
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.					
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.					
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.					
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.					
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.16.5.1.10.1-1.					
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.					

Table A.16.5.1.10.1-3A: Measurement gap configuration for FR1 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: Void	

Table A.16.5.1.10.1-4: Void

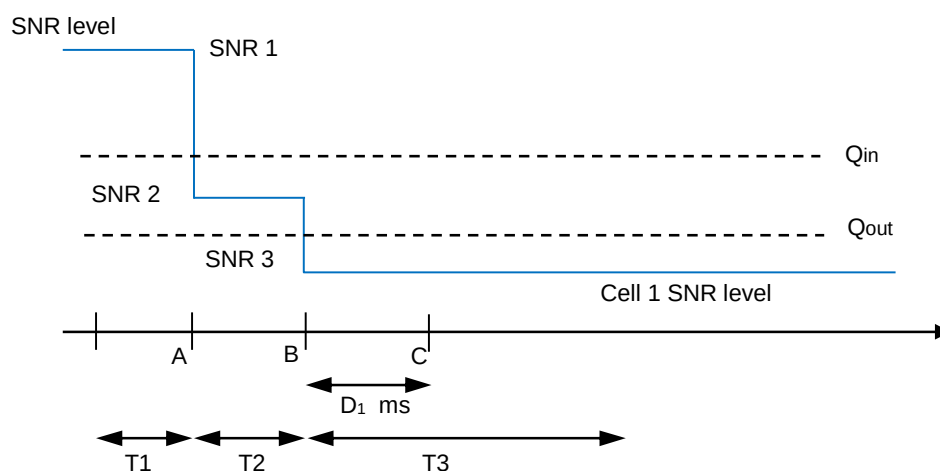


Figure A.16.5.1.10.1-1: SNR variation for CSI-RS out-of-sync testing

A.16.5.1.10.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.11 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 1 Rx UE

A.16.5.1.11.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.16.5.1.11.1-1, A.16.5.1.11.1-2, and A.16.5.1.11.1-3 below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.1.11.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. In the test, SSB0 is configured as the BFD-RS.

Table A.16.5.1.11.1-1: Supported test configurations for FR1 PCell

Configuration	Description
---------------	-------------

1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.11.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.3.1 FDD
	Config 2		CCR.4.1 TDD
	Config 3		CCR.5.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x1 Low

Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.84
T4		s	0.2
T5		s	1.88
T6		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.11.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS_PDCCH_DMRS_beta	dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta	dB					
EPRE ratio of PBCH to PBCH DMRS_PSS_beta	dB					

EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,4	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N _{oc}	Config 1,4	dBm/15kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS RES.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.16.5.1.11.1-1.							

Table A.16.5.1.11.1-4: Void

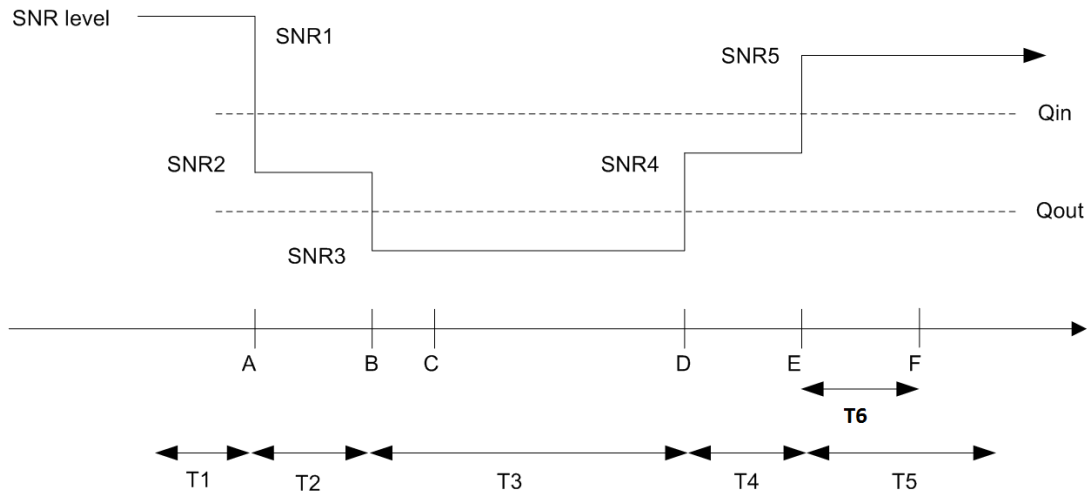


Figure A.16.5.1.11.1-1: SNR variation for CSI-RS in-sync testing

A.16.5.1.11.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.12 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in non-DRX mode for 2 Rx UE

A.16.5.1.12.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.16.5.1.12.1-1, A.16.5.1.12.1-2, and A.16.5.1.12.1-3 below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.1.12.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is not enabled. In the test, SSB0 is configured as the BFD-RS and is not same as RLM-RS to avoid triggering the beam failure during the RLM test.

Table A.16.5.1.12.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.12.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD

Dedicated CORESET Reference Channel	Config 3		CR.2.1 TDD
	Config 1, 4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
SSB index assigned as BFD-RS			0
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	1000

T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	0.44
T4		s	0.2
T5		s	0.88
T6		s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.12.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	0				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB					
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB					
EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,4	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N _{oc}	Config 1,4	dBm/15kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.16.5.1.12.1-1.							
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.							

Table A.16.5.1.12.1-4: Void

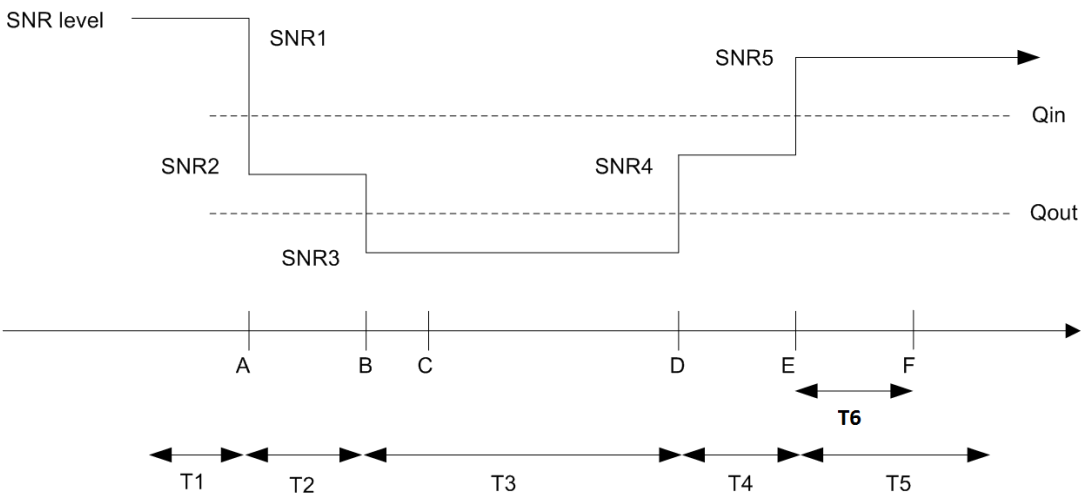


Figure A.16.5.1.12.1-1: SNR variation for CSI-RS in-sync testing

A.16.5.1.12.2 Test Requirements

The UE behaviour in each test during time durations $T1$, $T2$, $T3$, $T4$ and $T5$ shall be as follows:

During the period from time point A to time point F ($T6$ second after the start of time duration $T5$) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.13 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE

A.16.5.1.13.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.16.5.1.13.1-1, A.16.5.1.13.1-2, and A.16.5.1.13.1-3 below. There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of $T1$, $T2$ and $T3$ respectively. Figure A.16.5.1.13.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration $T1$, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 is configured as the BFD-RS.

Table A.16.5.1.13.1-1: Supported test configurations for FR1 PCell

Configuration	Description
---------------	-------------

1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.13.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.3.2 FDD
	Config 2		CCR.4.2 TDD
	Config 3		CCR.5.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x1 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2

	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	2.48
T3		s	2.48
D1		s	2.44
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.13.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS_PDCCH_DMRS_beta		dB	0		
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB			
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB			
EPRE ratio of PSS to SSSSSS_beta		dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1,4	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1,4	dBm/15kHz	-98		
	Config 2		-98		
	Config 3		-98		
Propagation condition			TDL-C 300ns 100Hz		

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
- Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.16.5.1.13.1-1.

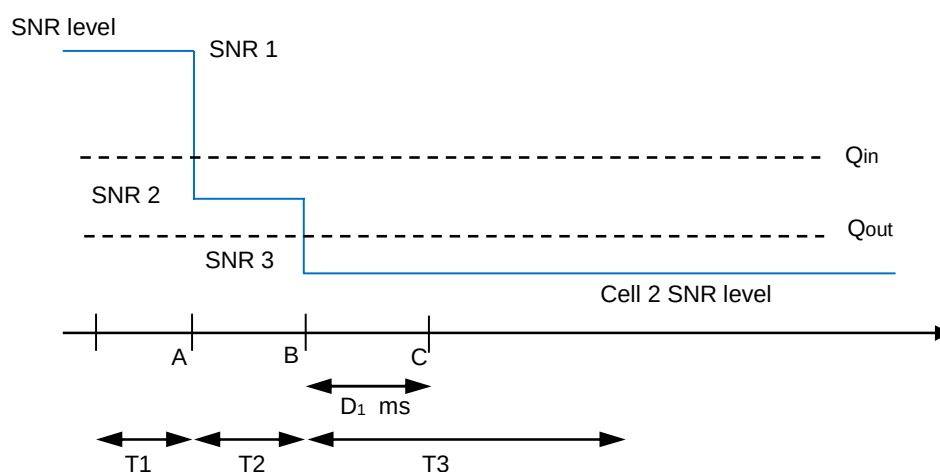


Figure A.16.5.1.13.1-1: SNR variation for CSI-RS out-of-sync testing

A.16.5.1.13.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on PCell.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.14 Radio Link Monitoring Out-of-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE

A.16.5.1.14.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1.

The test parameters are given in Tables A.16.5.1.14.1-1, A.16.5.1.14.1-2, and A.16.5.1.14.1-3 below. There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.16.5.1.14.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 is configured as the BFD-RS and is not same as RLM-RS to avoid triggering the beam failure during the RLM test.

Table A.16.5.1.14.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.14.1-2: General test parameters for FR1 PCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.3 FDD
	Config 2		CCR.1.3 TDD
	Config 3		CCR.2.2 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration	Config 1, 2, 4		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1, 4		TRS.1.1 FDD

	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
SSB index assigned as BFD-RS			0
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			N.A.
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	1.28
T3		s	1.28
D1		s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.14.1-3: Cell specific test parameters for FR1 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter	Unit	Test 1		
		T1	T2	T3
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta	dB	4		
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta	dB	0		
EPRE ratio of PBCH DMRS to SSSPBCH_beta	dB			
EPRE ratio of PBCH to PBCH DMRSPSS_beta	dB			
EPRE ratio of PSS to SSSSSS_beta	dB			
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta	dB			

EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS	Config 1,4	dB	1	-7	-15
	Config 2		1	-7	-15
	Config 3		1	-7	-15
N_{oc}	Config 1,4	dBm/15kHz	-98		
	Config 2		-98		
	Config 3		-98		
Propagation condition			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.					
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.					
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.					
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.					
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.					
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.					
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.16.5.1.14.1-1.					
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.					

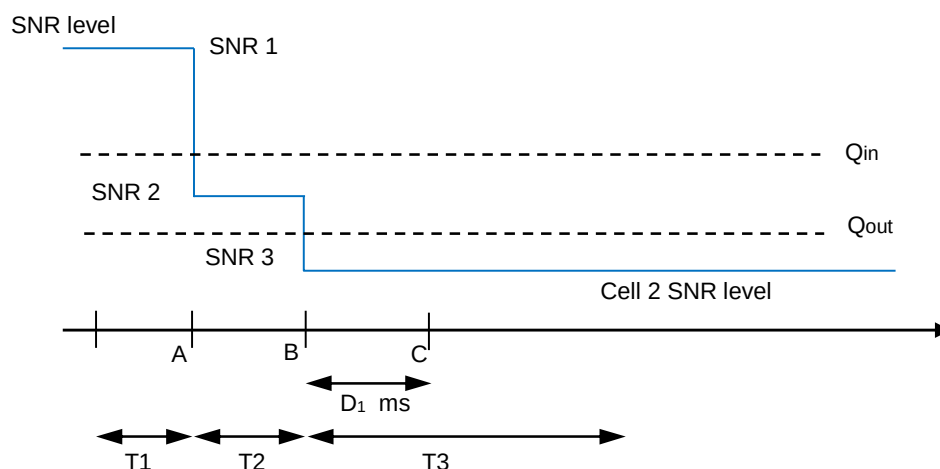


Figure A.16.5.1.14.1-1: SNR variation for CSI-RS out-of-sync testing

A.16.5.1.14.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on PCell.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 ms after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.15 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 1 Rx UE

A.16.5.1.15.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.16.5.1.15.1-1, A.16.5.1.15.1-2, A.16.5.1.15.1-3 and A.16.5.1.15.1-3A below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.1.15.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS.

Table A.16.5.1.15.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.15.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.3.1 FDD

SSB Configuration	Config 2		CCR.4.1 TDD
	Config 3		CCR.5.1 TDD
	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
SMTC Configuration	Config 3		SSB.1 RedCap FR1
	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x1 Low
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	16
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD

	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	2.44
T4		s	0.2
T5		s	1.88
T6		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.15.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta		dB	0				
EPRE ratio of PDCCH to PDCCH DMRSPDCCH_DMRS_beta		dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta		dB					
EPRE ratio of PBCH to PBCH DMRSPSS_beta		dB					
EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,4	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
N _{oc}	Config 1,4	dBm/15kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.16.5.1.15.1-1.							

Table A.16.5.1.15.1-3A: Measurement gap configuration for FR1 CSI-RS in-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: Void	

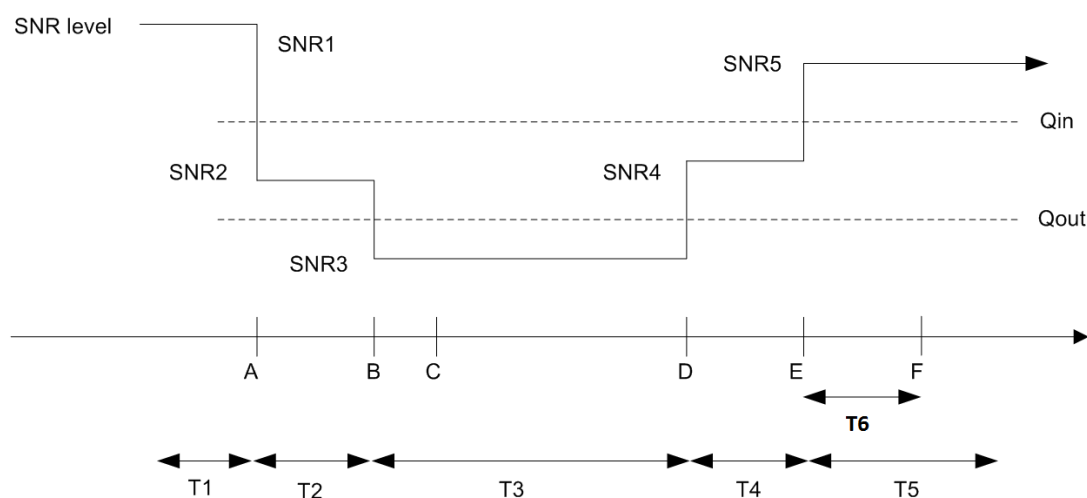


Figure A.16.5.1.15.1-1: SNR variation for CSI-RS in-sync testing

A.16.5.1.15.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.1.16 Radio Link Monitoring In-sync Test for FR1 PCell configured with CSI-RS-based RLM in DRX mode for 2 Rx UE

A.16.5.1.16.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR1 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.16.5.1.15.1-1, A.16.5.1.151-2, A.16.5.1.15.1-3 and A.16.5.1.15.1-3A below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.1.15.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 is configured as the BFD-RS and is not same as RLM-RS to avoid triggering the beam failure during the RLM test.

Table A.16.5.1.16.1-1: Supported test configurations for FR1 PSCell

Configuration	Description
---------------	-------------

1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.1.16.1-2: General test parameters for FR1 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		FDD
	Config 2, 3		TDD
	Config 4		HD-FDD
TDD Configuration	Config 1, 4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET Reference Channel	Config 1, 4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
SSB Configuration	Config 1, 4		SSB.1 FR1
	Config 2		SSB.1 FR1
	Config 3		SSB.2 FR1
SMTC Configuration	Config 1, 2		SMTC.1
	Config 3		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1, 2, 4		15 kHz
	Config 3		30 kHz
TRS configuration	Config 1, 4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
CSI-RS for RLM	Config 1, 4		Resource #4 in TRS.1.1 FDD
	Config 2		Resource #4 in TRS.1.1 TDD
	Config 3		Resource #4 in TRS.1.2 TDD
SSB index assigned as BFD-RS			0
TCI configuration for PDCCH/PDSCH			TCI.State. 2
OCNG parameters			OP.1
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low

Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS configuration for CSI reporting	Config 1, 4		CSI-RS.1.1 FDD
	Config 2		CSI-RS.1.1 TDD
	Config 3		CSI-RS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	1.24
T4		s	0.2
T5		s	1.88
T6		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.1.16.1-3: Cell specific test parameters for FR1 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSSPDCCH_beta	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS_PDCCH_DMRS_beta	dB					
EPRE ratio of PBCH DMRS to SSSPBCH_beta	dB					
EPRE ratio of PBCH to PBCH DMRS_PSS_beta	dB					

EPRE ratio of PSS to SSSSSS_beta		dB					
EPRE ratio of PDSCH DMRS to SSS PDSCH_beta		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS	Config 1,4	dB	1	-7	-15	-4.5	1
	Config 2		1	-7	-15	-4.5	1
	Config 3		1	-7	-15	-4.5	1
Noc	Config 1,4	dBm/15kHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.16.5.1.15.1-1.							
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.							

Table A.16.5.1.16.1-3A: Measurement gap configuration for FR1 CSI-RS in-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: Void	

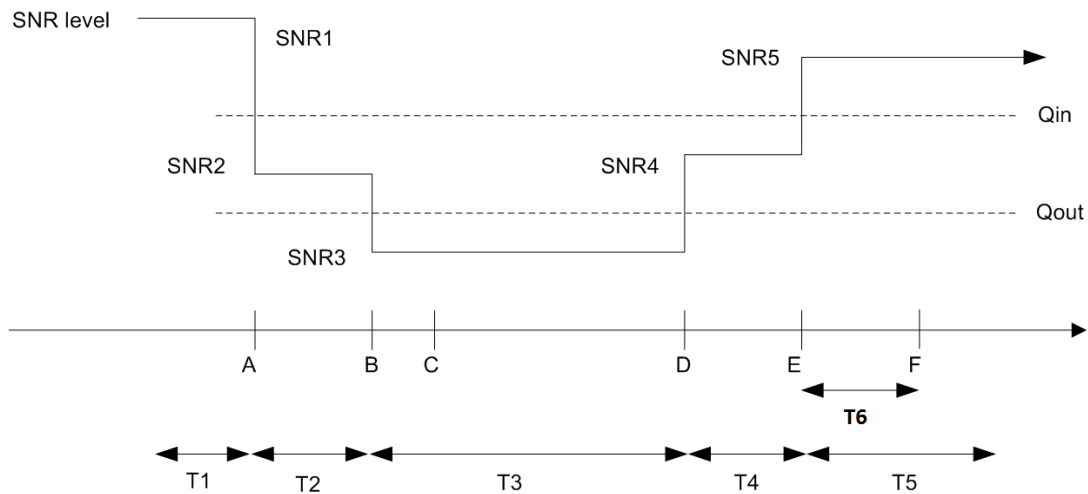


Figure A.16.5.1.15.1-1: SNR variation for CSI-RS in-sync testing

A.16.5.1.16.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (T6 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.2 Beam Failure Detection and Link recovery procedures

A.16.5.2.1 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 1 Rx UE

A.16.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5B.

The test parameters are given in Tables A.16.5.2.1.1-1, A.16.5.2.1.1-2, A.16.5.2.1.1-3 and A.16.5.2.1.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.2.1.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.16.5.2.1.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.16.5.2.1.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.2.1.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
BWchannel	Config 1,4	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		20: NRB,c = 51	
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3,4		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3,4		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3,4		ULBWP.1.1	
TDD Configuration	Config 1,4		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
SSB Configuration	Config 1,4		SSB.3 FR1	
	Config 2		SSB.3 FR1	
	Config 3		SSB.2 RedCap FR1	
SMTC Configuration	Config 1, 2,4		SMTC.1 RedCap	
	Config 3		SMTC.1 RedCap	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2		Table A.3.8.2.2-1	
	Config 3		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x1 Low	

Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	16	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			gp0	
gapOffset			0	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2,4	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer	ms		1000	
N310			2	
T1		s	0.2	During this time the the

			UE shall be fully synchronized to cell 1
T2	s	0.37	
T3	s	0.44	
T4	s	0	
T5	s	0.17	
D1	s	0.14	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.2.1.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1,4	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1,4	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
SSB_RP of set q_1	Config 1,4	dBm/S CS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
N_{oc}	Config 1,4	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.							
Note 9: Void.							

Table A.16.5.2.1.1-4: Void

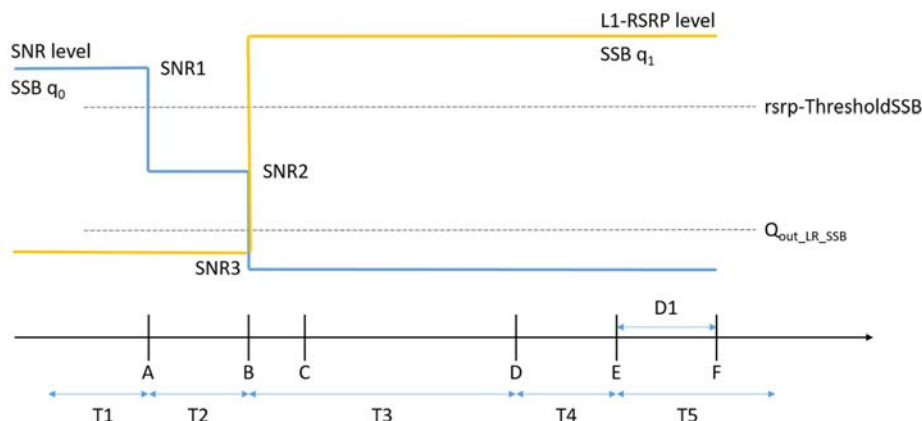


Figure A.16.5.2.1.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.16.5.2.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 120+20$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.2.2 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE

A.16.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5B.

The test parameters are given in Tables A.16.5.2.2.1-1, A.16.5.2.2.1-2, A.16.5.2.2.1-3 and A.16.5.2.2.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.2.2.1-1 shows the variation of the downlink SNR

of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.16.5.2.2.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 2 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.16.5.2.2.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.2.2.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
BWchannel	Config 1,4	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		20: NRB,c = 51	
DL initial BWP configuration	Config 1, 2, 3,4		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3,4		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3,4		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3,4		ULBWP.1.1	
TDD Configuration	Config 1,4		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
CORESET Reference Channel	Config 1,4		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
SSB Configuration	Config 1,4		SSB.3 FR1	
	Config 2		SSB.3 FR1	
	Config 3		SSB.1 RedCap FR1	
SMTC Configuration	Config 1, 2,4		SMTC.1 RedCap	
	Config 3		SMTC.1 RedCap	
PDSCH/PDCCH subcarrier spacing	Config 1, 2,4		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2,4		Table A.3.8.2.2-1	
	Config 3		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	

SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			gp0	
gapOffset			0	
rimInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2,4	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1,4		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD	

	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
SSB Index assigned as RLM RS		0, 1		
T310 Timer	ms	1000		
N310		2		
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.37	
T3		s	0.24	
T4		s	0	
T5		s	0.17	
D1		s	0.14	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.16.5.2.2.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1,4	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1,4	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
SSB_RP of set q_1	Config 1,4	dBm/5 CS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
N_{oc}	Config 1,4	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
Propagation condition			TDL-C 300ns 100Hz				

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
- Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.
- Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band. For testing of a UE which supports 4RX on all bands, the SNR during T3 is modified as specified in clause A.3.6.

Table A.16.5.2.2.1-4: Void

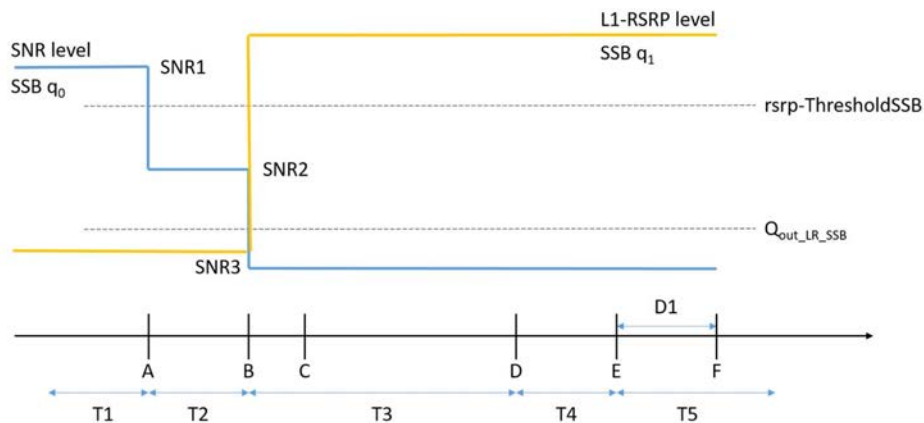


Figure A.16.5.2.2.1-1: SNR and L1-RSRP variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.16.5.2.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 120 + 20$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.2.3 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode for 1 Rx UE

A.16.5.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5B.2.

The test parameters are given in Tables A.16.5.2.3.1-1, A.16.5.2.3.1-2, A.16.5.2.3.1-3, A.16.5.2.3.1-4 and A.16.5.2.3.1-5 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.2.3.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.16.5.2.3.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.16.5.2.3.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.2.3.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
BWchannel	Config 1	MHz	10: NRB,c = 52	
	Config 2		10: NRB,c = 52	
	Config 3		20: NRB,c = 51	
	Config 4		10: NRB,c = 52	
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	

	Config 3		TDDConf.2.1	
	Config 4		Not Applicable	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
	Config 4		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
	Config 4		CCR.1.1 FDD	
SSB Configuration	Config 1		SSB.3 FR1	
	Config 2		SSB.3 FR1	
	Config 3		SSB.2 RedCap FR1	
	Config 4		SSB.3 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	
	Config 3		SMTC.1	
	Config 4		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
	Config 4		15 KHz	
PRACH Configuration	Config 1, 2		Table A.3.8.2.2-1	
	Config 3		Table A.3.8.2.2-1	
	Config 4		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x1 Low	
Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	16	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	

DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
rlmInSyncOutOfSyncThreshold			Absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
	Config 4		-98	
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
	Config 4		CSI-RS.1.1 FDD	
CSI-RS for tracking	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
	Config 4		TRS.1.1 FDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	5.17	
T3		s	6.44	
T4		s	0	
T5		s	1.97	
D1		s	1.94	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.16.5.2.3.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5

EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
	Config 4		5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
	Config 4		-10	-10	10	10	10
SSB_RP of set q_1	Config 1	dBm/S CS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
	Config 4		-108	-108	-88	-88	-88
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
	Config 4		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Void							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.							

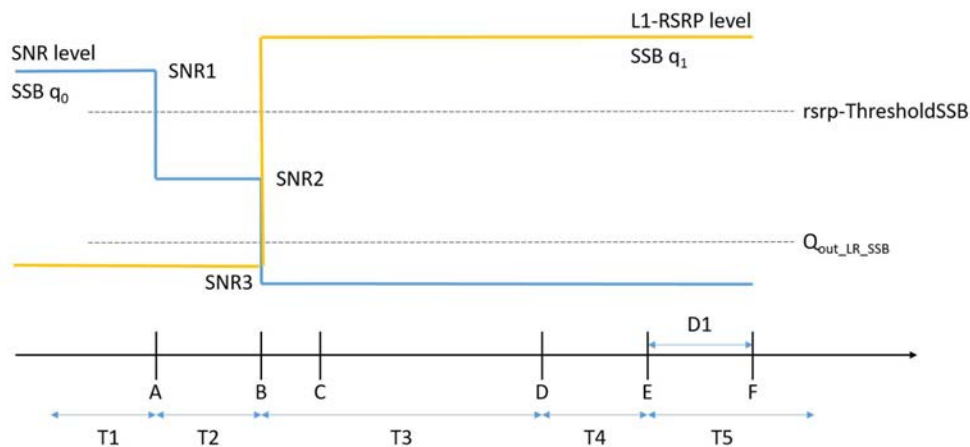


Figure A.16.5.2.2.1-1: SNR and L1-RSRP variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.16.5.2.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 1920 + 20$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.2.4 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with SSB-based BFD and LR in DRX mode for 2 Rx UE

A.16.5.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UE's active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5B.2.

The test parameters are given in Tables A.16.5.2.4.1-1, A.16.5.2.4.1-2, A.16.5.2.4.1-3, A.16.5.2.4.1-4 and A.16.5.2.4.1-5 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.2.4.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.16.5.2.4.1-1 additionally shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.16.5.2.4.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.2.4.1-2: General test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PSCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
BWchannel	Config 1	MHz	10: NRB _c = 52	
	Config 2		10: NRB _c = 52	
	Config 3		20: NRB _c = 51	
	Config 4		10: NRB _c = 52	
DL initial BWP configuration	Config 1, 2, 3, 4		DLBWP.0.1	
DL dedicated BWP configuration	Config 1, 2, 3, 4		DLBWP.1.1	
UL initial BWP configuration	Config 1, 2, 3, 4		ULBWP.0.1	
UL dedicated BWP configuration	Config 1, 2, 3, 4		ULBWP.1.1	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
	Config 4		Not Applicable	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
	Config 4		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
	Config 4		CCR.1.1 FDD	
SSB Configuration	Config 1		SSB.3 FR1	
	Config 2		SSB.3 FR1	
	Config 3		SSB.2 RedCap FR1	
	Config 4		SSB.3 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	
	Config 3		SMTC.1	
	Config 4		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
	Config 4		15 KHz	
PRACH Configuration	Config 1, 2		Table A.3.8.2.2-1	
	Config 3		Table A.3.8.2.2-1	
	Config 4		Table A.3.8.2.2-1	
SSB Index assigned as BFD RS (q_0)			0	
SSB Index assigned as CBD RS (q_1)			1	
OCNG parameters			OP.1	
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection transmission parameters	DCI format		1-0	

	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
rlmInSyncOutOfSyncThreshold			Absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SCS kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
	Config 4		-98	
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
	Config 4		CSI-RS.1.1 FDD	
CSI-RS for tracking	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
	Config 4		TRS.1.1 FDD	
SSB Index assigned as RLM RS			0, 1	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the the UE shall be fully

			synchronized to cell 1
T2	s	5.17	
T3	s	3.24	
T4	s	0	
T5	s	1.97	
D1	s	1.94	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.2.4.1-3: Cell specific test parameters for FR1 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
	Config 4		5	-3	-12	-12	-12
SNR_SSB of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
	Config 4		-10	-10	10	10	10
SSB_RP of set q_1	Config 1	dBm/S CS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
	Config 4		-108	-108	-88	-88	-88
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
	Config 4		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1:		OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:		The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.					
Note 3:		NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.					
Note 4:		Void					
Note 5:		The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.					
Note 6:		The signal contains PDCCH for UEs other than the device under test as part of OCNG.					
Note 7:		SNR levels correspond to the signal to noise ratio over the SSS RES.					
Note 8:		The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.1.1-1.					
Note 9:		The SNR values are specified for testing a UE which supports 2RX on at least one band.					

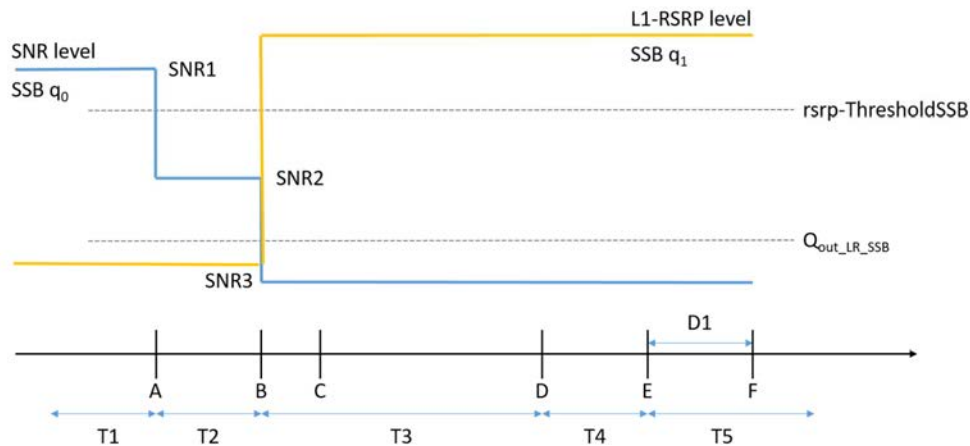


Figure A.16.5.2.4.1-1: SNR and L1-RSRP variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.16.5.2.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 1920 + 20$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.2.5 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 1 Rx UE

A.16.5.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5B.3.

The test parameters are given in Tables A.16.5.2.5.1-1, A.16.5.2.5.1-2, and below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.2.5.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active

cell to emulate CSI-RS based beam failure. Figure A.16.5.2.5.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.16.5.2.5.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.2.5.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Value	Comment
		Test 1	
Active PCell		Cell 1	
RF Channel Number		1	
Duplex mode	Config 1	FDD	
	Config 2, 3	TDD	
	Config 4	HD-FDD	
TDD Configuration	Config 1	Not Applicable	
	Config 2	TDDConf.1.1	
	Config 3	TDDConf.2.1	
	Config 4	Not Applicable	
RMSI CORESET Reference Channel	Config 1	CR.1.1 FDD	A.3.1.2
	Config 2	CR.1.1 TDD	
	Config 3	CR.2.1 TDD	
	Config 4	CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1	CCR.1.1 FDD	A.3.1.3
	Config 2	CCR.1.1 TDD	
	Config 3	CCR.2.1 TDD	
	Config 4	CCR.1.1 FDD	
SSB Configuration	Config 1	SSB.3 FR1	A.3.10
	Config 2	SSB.3 FR1	
	Config 3	SSB.2 RedCap FR1	
	Config 4	SSB.3 FR1	
SMTC Configuration	Config 1, 2	SMTC.1	A.3.11
	Config 3	SMTC.1	
	Config 4	SMTC.1	
PDSCH/PDC CH subcarrier spacing	Config 1, 2	15 KHz	
	Config 3	30 KHz	
PRACH Configuration	Config 1, 2, 4	FR1 PRACH configuration 4	A.3.8.2
	Config 3	FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0		0	
OCNG parameters		OP.1	A.3.2.1
CP length		Normal	
Correlation Matrix and Antenna Configuration		2x1 Low	

Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	16	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	N
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SC	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3	S kHz	-95	
	Config 4		-98	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 and q_1	Config 1		CSI-RS.1.2 FDD	A.3.14
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
	Config 4		CSI-RS.1.2 FDD	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.3.14
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
	Config 4		CSI-RS.1.1 FDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
	Config 4		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS	Config 1		CSI-RS.1.2 FDD	A.3.14
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
	Config 4		CSI-RS.1.2 FDD	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.27	

T4	s	0	
T5	s	0.08	
D1	s	0.05	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.2.5.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
	Config 4		5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
	Config 4		-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1	dBm/S CS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
	Config 4		-108	-108	-88	-88	-88
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
	Config 4		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Void							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.							

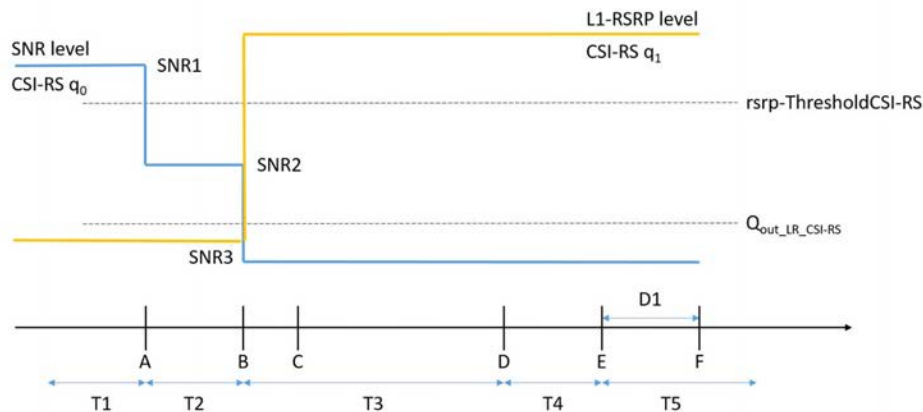


Figure A.16.5.2.5.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

A.16.5.2.5.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 30 + 20$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.2.6 Beam Failure Detection and Link Recovery Test for FR1 PCell configured with CSI-RS-based BFD and LR in non-DRX mode for 2 Rx UE

A.16.5.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UE's active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR1 serving cell requirements in clause 8.5B.3.

The test parameters are given in Tables A.16.5.2.6.1-1, A.16.5.2.6.1-2, and below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.16.5.2.6.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.16.5.2.6.1-1 additionally shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration

T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.16.5.2.6.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.2.6.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf.2.1	
	Config 4		Not Applicable	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
	Config 4		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	A.3.1.3
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
	Config 4		CCR.1.1 FDD	
SSB Configuration	Config 1		SSB. 3 FR1	A.3.10
	Config 2		SSB. 3 FR1	
	Config 3		SSB.2 RedCap FR1	
	Config 4		SSB.3 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	A.3.11
	Config 3		SMTC.1	
	Config 4		SMTC.1	
PDSCH/PDC CH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2, 4		FR1 PRACH configuration 4	A.3.8.2
	Config 3		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	
Beam failure detection	DCI format		1-0	

transmission parameters				
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			OFF	
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	N
rlminSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SC S kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
	Config 4		-98	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 and q_1	Config 1		CSI-RS.1.2 FDD	A.3.14
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
	Config 4		CSI-RS.1.2 FDD	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.3.14
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
	Config 4		CSI-RS.1.1 FDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
	Config 4		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS	Config 1		CSI-RS.1.2 FDD	A.3.14
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
	Config 4		CSI-RS.1.2 FDD	
T310 Timer		ms	1000	
N310			2	
T1		s	0.2	During this time the the UE shall be fully synchronized to cell 1
T2		s	0.18	
T3		s	0.14	
T4		s	0	
T5		s	0.08	

D1	s	0.05	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.2.6.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
	Config 4		5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
	Config 4		-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1	dBm/S CS kHz	-108	-108	-88	-88	-88
	Config 2		-108	-108	-88	-88	-88
	Config 3		-105	-105	-85	-85	-85
	Config 4		-108	-108	-88	-88	-88
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
	Config 4		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Void						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.						
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band.						

periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.16.5.2.7.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.2.7.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf..21	
	Config 4		Not Applicable	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
	Config 4		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	A.3.1.3
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
	Config 4		CCR.1.1 FDD	
SSB Configuration	Config 1		SSB.3 FR1	A.3.10
	Config 2		SSB.3 FR1	
	Config 3		SSB.2 RedCap FR1	
	Config 4		SSB.3 FR1	
SMTTC Configuration	Config 1, 2		SMTTC.1	A.3.11
	Config 3		SMTTC.1	
	Config 4		SMTTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
PRACH Configuration	Config 1, 2, 4		FR1 PRACH configuration 4	A.3.8.2
	Config 3		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x1 Low	

Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	16	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SC S kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
	Config 4		-98	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 and q_1	Config 1		CSI-RS.1.2 FDD	A.3.14.1
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
	Config 4		CSI-RS.1.2 FDD	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.3.14.1
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
	Config 4		CSI-RS.1.1 FDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
	Config 4		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS	Config 1		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
	Config 4		CSI-RS.1.2 FDD	
T310 Timer		ms	1000	
N310			2	
T1		s	1	During this time the UE shall be fully synchronized to cell 1
T2		s	8.37	
T3		s	12.24	

T4	s	0	
T5	s	1.97	
D1	s	1.94	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.2.7.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
	Config 4		5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
	Config 4		-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1	dB/SC S kHz	-110	-110	-88	-88	-88
	Config 2		-110	-110	-88	-88	-88
	Config 3		-107	-107	-85	-85	-85
	Config 4		-110	-110	-88	-88	-88
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
	Config 4		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Void						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.5.1.1-1.						

periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.16.5.2.8.1-1: Supported test configurations for FR1 PCell

Configuration	Description
1	FDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
2	TDD duplex mode, 15 kHz SSB SCS, 10 MHz bandwidth
3	TDD duplex mode, 30 kHz SSB SCS, 20 MHz bandwidth
4	HD-FDD duplex mode, 15kHz SSB SCS, 10 MHz bandwidth
Note: The UE is only required to pass in one of the supported test configurations in FR1	

Table A.16.5.2.8.1-2: General test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Value	Comment
			Test 1	
Active PCell			Cell 1	
RF Channel Number			1	
Duplex mode	Config 1		FDD	
	Config 2, 3		TDD	
	Config 4		HD-FDD	
TDD Configuration	Config 1		Not Applicable	
	Config 2		TDDConf.1.1	
	Config 3		TDDConf..21	
	Config 4		Not Applicable	
RMSI CORESET Reference Channel	Config 1		CR.1.1 FDD	A.3.1.2
	Config 2		CR.1.1 TDD	
	Config 3		CR.2.1 TDD	
	Config 4		CR.1.1 FDD	
Dedicated CORESET Reference Channel	Config 1		CCR.1.1 FDD	A.3.1.3
	Config 2		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD	
	Config 4		CCR.1.1 FDD	
SSB Configuration	Config 1		SSB.3 FR1	A.3.10
	Config 2		SSB.3 FR1	
	Config 3		SSB.2 RedCap FR1	
	Config 4		SSB.3 FR1	
SMTC Configuration	Config 1, 2		SMTC.1	A.3.11
	Config 3		SMTC.1	
	Config 4		SMTC.1	
PDSCH/PDCCH subcarrier spacing	Config 1, 2		15 KHz	
	Config 3		30 KHz	
	Config 4		15 KHz	
PRACH Configuration	Config 1, 2, 4		FR1 PRACH configuration 4	A.3.8.2
	Config 3		FR1 PRACH configuration 4	A.3.8.2
csi-RS-Index assigned as beam failure detection RS in set q_0			0	
OCNG parameters			OP.1	A.3.2.1
CP length			Normal	
Correlation Matrix and Antenna Configuration			2x2 Low	

Beam failure detection transmission parameters	DCI format		1-0	
	Number of Control OFDM symbols		2	
	Aggregation level	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0	
	DMRS precoder granularity		REG bundle size	
	REG bundle size		6	
DRX			DRX.7	A.3.3.7
Gap pattern ID			N.A.	
csi-RS-Index assigned as candidate beam detection RS in set q_1			1	
rlmInSyncOutOfSyncThreshold			absent	When the field is absent, the UE applies the value 0. (Table 8.1.1-1).
rsrp-ThresholdSSB	Config 1, 2	dBm/SC S kHz	-98	Threshold used for $Q_{in_LR_SSB}$
	Config 3		-95	
	Config 4		-98	
powerControlOffsetSS			db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount			n1	see clause 5.17 of TS 38.321 [7]
beamFailureDetectionTimer			pbfd4	see clause 5.17 of TS 38.321 [7]
CSI-RS configuration for q_0 and q_1	Config 1		CSI-RS.1.2 FDD	A.3.14.1
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
	Config 4		CSI-RS.1.2 FDD	
CSI-RS configuration for CSI reporting	Config 1		CSI-RS.1.1 FDD	A.3.14.1
	Config 2		CSI-RS.1.1 TDD	
	Config 3		CSI-RS.2.1 TDD	
	Config 4		CSI-RS.1.1 FDD	
TRS configuration	Config 1		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD	
	Config 4		TRS.1.1 FDD	
CSI-RS-Index assigned as RLM RS	Config 1		CSI-RS.1.2 FDD	
	Config 2		CSI-RS.1.2 TDD	
	Config 3		CSI-RS.2.2 TDD	
	Config 4		CSI-RS.1.2 FDD	
T310 Timer		ms	1000	
N310			2	

T1	s	1	During this time the the UE shall be fully synchronized to cell 1
T2	s	8.37	
T3	s	6.44	
T4	s	0	
T5	s	1.97	
D1	s	1.94	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.16.5.2.8.1-3: Cell specific test parameters for FR1 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5	-3	-12	-12	-12
	Config 2		5	-3	-12	-12	-12
	Config 3		5	-3	-12	-12	-12
	Config 4		5	-3	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	-10	-10	10	10	10
	Config 2		-10	-10	10	10	10
	Config 3		-10	-10	10	10	10
	Config 4		-10	-10	10	10	10
CSI-RS_RP of set q_1	Config 1	dB/SC S kHz	-110	-110	-88	-88	-88
	Config 2		-110	-110	-88	-88	-88
	Config 3		-107	-107	-85	-85	-85
	Config 4		-110	-110	-88	-88	-88
N_{oc}	Config 1	dBm/15 KHz	-98				
	Config 2		-98				
	Config 3		-98				
	Config 4		-98				
Propagation condition			TDL-C 300ns 100Hz				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Void						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.4.5.1.1-1.						
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band.						

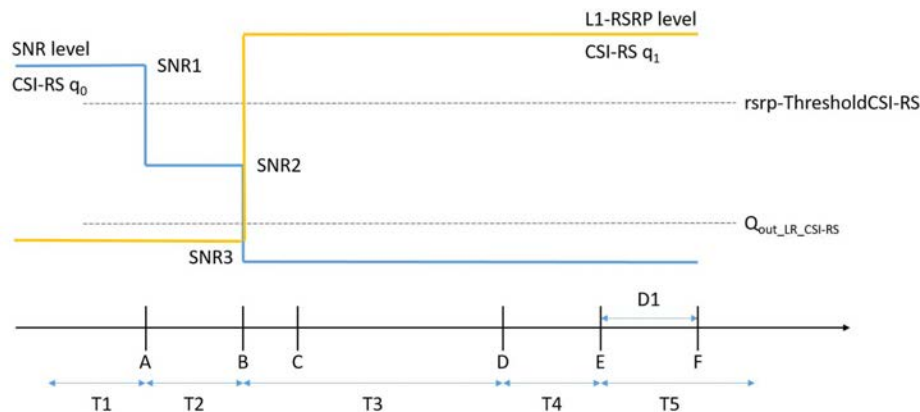


Figure A.16.5.2.8.1-1: SNR and L1-RSRP variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

A.16.5.2.8.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 1920 + 20$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.3 Active BWP switch

A.16.5.3.1 DCI-based and Timer-based Active BWP Switch

A.16.5.3.1.1 NR FR1 DL active BWP switch with non-DRX in SA for 1 Rx UE

A.16.5.3.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for 1Rx RedCap defined in clause 8.6A.

The supported test configurations are shown in Table A.16.5.3.1.1.1-1. The test scenario comprises of one cell (Cell 1) as given in Table A.16.5.3.1.1.1-2. Cell-specific parameters of the cell are specified in Table A.16.5.3.1.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
- UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

The cell has constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell1's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6A and starts to report valid ACK/NACK for the Cell1 no later than the first UL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on Cell1's BWP-2 starting from the first DL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell1.

During T3,

The time period T3 starts from the slot # j , where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's slot ($j + T_{BWPswitchDelay}$) as defined in clause 8.6A and starts to report valid ACK/NACK for the Cell1 at latest on the first UL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay} + k1$). The UE shall be continuously scheduled on Cell1's BWP-1 starting from the first DL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

Table A.16.5.3.1.1.1-1: DL BWP switch supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.5.3.1.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell1 on RF channel number 1.
CP length		Normal	

DRX		OFF	
<i>bwp-InactivityTimer</i>	ms	200	
PDCCH and PDSCH maximum number of HARQ transmission		1	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.16.5.3.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
BW _{channel}	Config 1		10 MHz: N _{RB,c} = 52
	Config 2		10 MHz: N _{RB,c} = 52
	Config 3		20 MHz: N _{RB,c} = 51
	Config 4		10 MHz: N _{RB,c} = 52
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,2,3,4		DLBWP.0.2 ^{Note 4}
Active DL BWP-1 Configuration	Config 1,2,3,4		DLBWP.1.1 ^{Note 4}
Active DL BWP-2 Configuration	Config 1,2,3,4		DLBWP.1.1 RedCap ^{Note 4}
Initial UL BWP Configuration	Config 1,2,3,4		ULBWP.0.2 ^{Note 4}
Active UL BWP-1 Configuration	Config 1,2,3,4		ULBWP.1.1 ^{Note 4}
Active UL BWP-2 Configuration	Config 1,4		N/A
	Config 2,3		ULBWP.1.1 RedCap ^{Note 4}
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.2 FDD
	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration			SMTC.1
Antenna Configuration			1x1
TRS Configuration	Config 1,4		TRS.1.1 FDD

		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note 2}	Config 1,2,4	dBm/SCS	-104	
	Config 3		-101	
N_{oc} ^{Note 2}		dBm/15kHz z	-104	
SS-RSRP ^{Note 3}	Config 1,2,4	dBm/SCS	-87	
	Config 3		-84	
$\hat{E}_s/I_{ot}$			dB	17
$\hat{E}_s/N_{oc}$			dB	17
I_o ^{Note3}	Config 1,2,4	dBm/ 9.36MHz	-58.96	
	Config 3	dBm/ 38.16MHz	-52.86	
Propagation Condition				AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.1 RedCap is linked with ULBWP.1.1 RedCap defined in clause 12 of TS 38.213 [3].				

A.16.5.3.1.2.1 Test Requirements

During T1, the UE shall start to send the ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot $(j + T_{BWPswitchDelay} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6A.2-1.

All of the above test requirements shall be fulfilled in order for the observed Cell1 active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$, $(j + T_{BWPswitchDelay} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.16.5.3.1.2 NR FR1 DL active BWP switch with non-DRX in SA for 2 Rx UE

A.16.5.3.1.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for 2Rx RedCap defined in clause 8.6A.

The supported test configurations are shown in Table A.16.5.3.1.2.1-1. The test scenario comprises of one cell (Cell 1) as given in Table A.16.5.3.1.2.1-2. Cell-specific parameters of the cell are specified in Table A.16.5.3.1.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
- UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

The cell has constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell1's slot # denoted i . The UE shall switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's DL slot $(i + T_{BWPswitchDelay})$ as defined in clause 8.6A and starts to report valid ACK/NACK for the Cell1 no later than the first UL slot that occurs after the beginning of slot $(i + T_{BWPswitchDelay} + k1)$. The UE shall be continuously scheduled on Cell1's BWP-2 starting from the first DL slot that occurs after the beginning of slot $(i + T_{BWPswitchDelay})$.

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell1.

During T3,

The time period T3 starts from the slot # j , where j is the first slot of the subframe immediately after *bwp-InactivityTimer* timer expires. The UE shall switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell1's slot $(j + T_{BWPswitchDelay})$ as defined in clause 8.6A and starts to report valid ACK/NACK for the Cell1 at latest on the first UL slot that occurs after the beginning of slot $(j + T_{BWPswitchDelay} + k1)$. The UE shall be continuously scheduled on Cell1's BWP-1 starting from the first DL slot that occurs after the beginning of slot $(j + T_{BWPswitchDelay})$.

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK/NACK is received.

Table A.16.5.3.1.2.1-1: DL BWP switch supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.5.3.1.2.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell1 on RF channel number 1.
CP length		Normal	
DRX		OFF	
<i>bwp-InactivityTimer</i>	ms	200	
PDCCH and PDSCH maximum number of HARQ transmission		1	
T1	s	0.2	
T2	s	0.2	
T3	s	0.2	

Table A.16.5.3.1.2.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
BW _{channel}	Config 1		10 MHz: N _{RB,c} = 52
	Config 2		10 MHz: N _{RB,c} = 52
	Config 3		20 MHz: N _{RB,c} = 51
	Config 4		10 MHz: N _{RB,c} = 52
Active BWP ID			1, 2
Initial DL BWP Configuration	Config 1,2,3,4		DLBWP.0.2 ^{Note 4}
Active DL BWP-1 Configuration	Config 1,2,3,4		DLBWP.1.1 ^{Note 4}
Active DL BWP-2 Configuration	Config 1,2,3,4		DLBWP.1.1 RedCap ^{Note 4}
Initial UL BWP Configuration	Config 1,2,3,4		ULBWP.0.2 ^{Note 4}
Active UL BWP-1 Configuration	Config 1,2,3,4		ULBWP.1.1 ^{Note 4}
Active UL BWP-2 Configuration	Config 1,4		N/A
	Config 2,3		ULBWP.1.1 RedCap ^{Note 4}
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR.2.1 TDD

RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR.2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.2 FDD
	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTc Configuration			SMTc.1
Correlation Matrix and Antenna Configuration			1x2 Low
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
N_{oc} ^{Note 2}	Config 1,2,4	dBm/SCS	-104
	Config 3		-101
N_{oc} ^{Note 2}		dBm/15kHz z	-104
SS-RSRP ^{Note 3}	Config 1,2,4	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I_o ^{Note3}	Config 1,2,4	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Propagation Condition			AWGN
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.1 RedCap is linked with ULBWP.1.1 RedCap defined in clause 12 of TS 38.213 [3].			

A.16.5.3.1.2.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot $(j + T_{BWPswitchDelay} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6A.2-1.

All of the above test requirements shall be fulfilled in order for the observed Cell1 active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$, $(j + T_{BWPswitchDelay} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.16.5.3.2 RRC-based Active BWP Switch

A.16.5.3.2.1 NR FR1 DL active BWP switch of Cell with non-DRX in SA for 1 Rx UE

A.16.5.3.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6A.

The supported test configurations are shown in Table A.16.5.3.2.1.1-1. The test scenario comprises of one Cell (Cell 1) as given in Table A.16.5.3.2.1.1-2. Cell-specific parameters of Cell are specified in Table A.16.5.3.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted i . The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ as defined in clause 8.6A.3 and starts to report valid

ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length} + k1$ on BWP-1 of final condition. The UE shall be continuously

scheduled on PCell's BWP-1 of final condition starting from the first DL slot right after slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$.

$T_{\text{RRCprocessingDelay}}$ and $T_{\text{BWPswitchDelayRRC}}$ are defined in clause 8.6A.3.

The test equipment verifies the DL BWP switch time in Cell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when a valid ACK/NACK is received.

Table A.16.5.3.2.1.1-1: DL BWP switch supported test configurations in SA scenario

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.5.3.2.1.1-2: General test parameters for DL BWP switch in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
PDCCH and PDSCH maximum number of HARQ transmission		1	
T1	s	0.2	

Table A.16.5.3.2.1.1-3: NR Cell specific test parameters for DL BWP switch in SA scenario

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
BW _{channel}	Config 1,4		10 MHz: N _{RB,c} = 52
	Config 2		10 MHz: N _{RB,c} = 52
	Config 3		20 MHz: N _{RB,c} = 51
Active BWP ID			1
Initial DL BWP Configuration		Config 1,2, 3,4	DLBWP.0.2
Initial UL BWP Configuration		Config 1,2, 3,4	ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1, 2, 3,4	DLBWP.1.1 RedCap
	Active UL BWP-1 Configuration	Config 1, 2, 3,4	ULBWP.1.1 RedCap

Final Condition	Active DL BWP-1 Configuration	Config 1, 2, 3,4		DLBWP.1.1
	Active UL BWP-1 Configuration	Config 1, 2, 3,4		ULBWP.1.1
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2		SR.1.1 TDD
		Config 3		SR2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR2.1 TDD
Dedicated CORESET parameters		Config 1,4		CCR.1.2 FDD
		Config 2		CCR.1.2 TDD
		Config 3		CCR.2.4 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2,4		SSB.1 FR1
		Config 3		SSB.1 RedCap FR1
SMTC Configuration				SMTC.1
TRS Configuration		Config 1,4		TRS.1.1 FDD
		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
Antenna Configuration				1x1
Propagation Condition				AWGN
EPRE ratio of PSS to SSS			dB	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS ^(Note 1)				
EPRE ratio of OCNG to OCNG DMRS ^(Note 1)				
N _{oc} ^{Note 2}		Config 1,2		
		Config 3		-101
SS-RSRP ^{Note 3}		Config 1,2	dBm/SCS	-87
		Config 3		-84
Ē _s /I _{ot}			dB	17
Ē _s /N _{oc}			dB	17
I _o ^{Note3}		Config 1,2	dBm/ 9.36MHz	-58.96
		Config 3	dBm/ 38.16MHz	-52.86
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.1 RedCap is linked with ULBWP.1.1 RedCap defined in clause 12 of TS 38.213 [3].				

A.16.5.3.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the Cell from the first DL slot that occurs right after the beginning of slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k1$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed Cell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.3.2.2 NR FR1 DL active BWP switch of Cell with non-DRX in SA for 2 Rx UE

A.16.5.3.2.2.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6A.

The supported test configurations are shown in Table A.16.5.3.2.2.1-1. The test scenario comprises of one Cell (Cell 1) as given in Table A.16.5.3.2.2.1-2. Cell-specific parameters of Cell are specified in Table A.16.5.3.2.2.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is completely received at the UE side in PCell's slot # denoted i . The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ as defined in clause 8.6A.3 and starts to report valid

ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k1$ on BWP-1 of final condition. The UE shall be continuously scheduled on PCell's BWP-1 of final condition starting from the first DL slot right after slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$.

$T_{\text{RRCprocessingDelay}}$ and $T_{\text{BWPswitchDelayRRC}}$ are defined in clause 8.6A.3.

The test equipment verifies the DL BWP switch time in Cell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when a valid ACK/NACK is received.

Table A.16.5.3.2.2.1-1: DL BWP switch supported test configurations in SA scenario

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.5.3.2.2.1-2: General test parameters for DL BWP switch in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
PDCCH and PDSCH maximum number of HARQ transmission		1	
T1	s	0.2	

Table A.16.5.3.2.2.1-3: NR Cell specific test parameters for DL BWP switch in SA scenario

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1,4		FDD
	Config 2,3		TDD
TDD configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
BW _{channel}	Config 1,4		10 MHz: N _{RB,c} = 52
	Config 2		10 MHz: N _{RB,c} = 52
	Config 3		20 MHz: N _{RB,c} = 51
Active BWP ID			1
Initial DL BWP Configuration		Config 1,2, 3,4	DLBWP.0.2
Initial UL BWP Configuration		Config 1,2, 3,4	ULBWP.0.2
Initial Condition	Active DL BWP-1 Configuration	Config 1, 2, 3,4	DLBWP.1.1 RedCap
	Active UL BWP-1 Configuration	Config 1, 2, 3,4	ULBWP.1.1 RedCap
Final Condition	Active DL BWP-1 Configuration	Config 1, 2, 3,4	DLBWP.1.1
	Active UL BWP-1 Configuration	Config 1, 2, 3,4	ULBWP.1.1

PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD
	Config 2		SR.1.1 TDD
	Config 3		SR2.1 TDD
RMSI CORESET parameters	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.2 FDD
	Config 2		CCR.1.2 TDD
	Config 3		CCR.2.4 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration			SMTC.1
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
Antenna Configuration			1x2 Low
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^(Note 1)			
EPRE ratio of OCNG to OCNG DMRS ^(Note 1)			
N _{oc} ^{Note 2}	Config 1,2,4	dBm/SCS	-104
	Config 3		-101
SS-RSRP ^{Note 3}	Config 1,2,4	dBm/SCS	-87
	Config 3		-84
$\hat{E}_s/I_{ot}$		dB	17
$\hat{E}_s/N_{oc}$		dB	17
I _o ^{Note3}	Config 1,2,4	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 38.16MHz	-52.86
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.		
Note 3:	SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.2 RedCap is linked with ULBWP.1.1 RedCap defined in clause 12 of TS 38.213 [3].		

A.16.5.3.2.2.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the Cell from the first DL slot that occurs right after the beginning of slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k1$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed Cell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.4 UE specific CBW change

A.16.5.4.1 UE specific CBW change on PCell in FR1 in non-DRX for 1 Rx UE

A.16.5.4.1.1 Test Purpose and Environment

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13A.

The supported test configurations are shown in Table A.16.5.4.1.1-1. The test scenario comprises of one Cell (Cell 1) as given in Table A.16.5.4.1.1-2. Cell-specific parameters are specified in Table A.16.5.4.1.1-3.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE sends ACK/NACK during the test.

Before the test starts:

- UE is connected to Cell 1 on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.
- UE has been configured with UE specific CBW (CBW-1).
- UE is indicated in *SCS-SpecificCarrier* [2] that the UE specific CBW is CBW-1 as the initial condition in Cell 1.

Cell1 has constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* containing *SCS-SpecificCarrier* with updated UE specific CBW, sent from the test equipment to the UE, is completely received at the UE side in Cell 1's slot # denoted i . The UE shall reconfigure its UE specific CBW with the updated CBW-2 for the final condition.

The UE shall be able to receive PDSCH on Cell 1 from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ as defined in clause 8.13A and starts to report valid

ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot $i +$

$\frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1$ on the Cell 1's BWP-1 on CBW-2 for the final condition. The UE shall be continuously scheduled on the Cell 1's BWP-1 on CBW-2 for the final condition starting from the first DL slot right after slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$.

$T_{RRCprocessingDelay}$ and $T_{CBWchangeDelayRRC}$ are defined in clause 8.13A.

The test equipment verifies the UE specific CBW switching delay in Cell 1 by estimating the time from the moment the RRC Reconfiguration message including updated UE specific CBW configuration is sent until the moment a valid ACK/NACK is received.

Table A.16.5.4.1.1-1: Supported test configurations for UE specific CBW change in SA scenario

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.5.4.1.1-2: General test parameters for UE specific CBW change in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

Table A.16.5.4.1.1-3: NR Cell specific test parameters for UE specific CBW change in SA scenario

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
	Config 4		HD-FDD
TDD configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
BW _{channel}	Config 1		10 MHz: N _{RB,c} = 52
	Config 2		10 MHz: N _{RB,c} = 52
	Config 3		20 MHz: N _{RB,c} = 51
	Config 4		10 MHz: N _{RB,c} = 52
Active DL BWP ID		Config 1,2, 3,4	0
Initial DL BWP Configuration (BWP-1)		Config 1,2, 3,4	DLBWP.0.2
Initial UL BWP Configuration		Config 1,2, 3,4	ULBWP.0.2
Initial Condition	Active DL CBW Configuration (CBW-1)	Config 1, 2, 3,4	DLCBW.1.1
	Active UL CBW Configuration (CBW-1)	Config 1, 2, 3,4	ULCBW.1.1
Final Condition	Active DL CBW Configuration (CBW-2)	Config 1, 2, 3,4	DLCBW.1.2

	Active UL CBW Configura- tion (CBW-2)	Config 1, 2, 3,4		ULCBW.1.2
PDSCH Reference measurement channel		Config 1,4		SR.1.1 FDD
		Config 2		SR.1.1 TDD
		Config 3		SR.2.1 TDD
RMSI CORESET parameters		Config 1,4		CR.1.1 FDD
		Config 2		CR.1.1 TDD
		Config 3		CR.2.1 TDD
Dedicated CORESET parameters		Config 1,4		CCR.1.1 FDD
		Config 2		CCR.1.1 TDD
		Config 3		CCR.2.1 TDD
OCNG Patterns				OP.1
SSB Configuration		Config 1,2,4		SSB.1 FR1
		Config 3		SSB.1 RedCap FR1
SMTC Configuration				SMTC.1 RedCap FR1
TRS Configuration		Config 1,4		TRS.1.1 FDD
		Config 2		TRS.1.1 TDD
		Config 3		TRS.1.2 TDD
Antenna Configuration				1x1
Propagation Condition				AWGN
EPRE ratio of PSS to SSS		dB		0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS ^(Note 1)				
EPRE ratio of OCNG to OCNG DMRS ^(Note 1)				
N _{oc} ^{Note 2}		Config 1,2,4	dBm/SCS	-104
		Config 3		-101
SS-RSRP ^{Note 3}		Config 1,2,4	dBm/SCS	-87
		Config 3		-84
$\hat{E}_s/I_{ot}$			dB	17
$\hat{E}_s/N_{oc}$			dB	17
I _o ^{Note3}		Config 1,2,4	dBm/ 9.36MHz	-58.96
		Config 3	dBm/ 18.36MHz	-56.04
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 3: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.1 is linked with ULBWP.0.1; DLBWP.1.1 is linked with ULBWP.1.1: as defined in clause 12 of TS 38.213 [3].				

A.16.5.4.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the Cell 1 from the first DL slot that occurs right after the beginning of slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ and starts to report valid ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed UE specific CBW change delay on the Cell 1 to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.5.4.2 UE specific CBW change on PCell in FR1 in non-DRX for 2 Rx UE

A.16.5.4.2.1 Test Purpose and Environment

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13A.

The supported test configurations are shown in Table A.16.5.4.2.1-1. The test scenario comprises of one Cell (Cell 1) as given in Table A.16.5.4.2.1-2. Cell-specific parameters are specified in Table A.16.5.4.2.1-3.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE sends ACK/NACK during the test.

Before the test starts:

- UE is connected to Cell 1 on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.
- UE has been configured with UE specific CBW (CBW-1).
- UE is indicated in *SCS-SpecificCarrier* [2] that the UE specific CBW is CBW-1 as the initial condition in Cell 1.

Cell1 has constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* containing *SCS-SpecificCarrier* with updated UE specific CBW, sent from the test equipment to the UE, is completely received at the UE side in Cell 1's slot # denoted i . The UE shall reconfigure its UE specific CBW with the updated CBW-2 for the final condition.

The UE shall be able to receive PDSCH on Cell 1 from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ as defined in clause 8.13A and starts to report valid

ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1$ on the Cell 1's BWP-1 on CBW-2 for the final condition. The UE shall be continuously scheduled on the Cell 1's BWP-1 on CBW-2 for the final condition starting from the first DL slot right after slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$.

$T_{RRCprocessingDelay}$ and $T_{CBWchangeDelayRRC}$ are defined in clause 8.13A.

The test equipment verifies the UE specific CBW switching delay in Cell 1 by estimating the time from the moment the RRC Reconfiguration message including updated UE specific CBW configuration is sent until the moment a valid ACK/NACK is received.

Table A.16.5.4.2.1-1: Supported test configurations for UE specific CBW change in SA scenario

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.5.4.2.1-2: General test parameters for UE specific CBW change in SA scenario

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	

Table A.16.5.4.2.1-3: NR Cell specific test parameters for UE specific CBW change in SA scenario

Parameter		Unit	Cell 1
Frequency Range			FR1
Duplex mode	Config 1		FDD
	Config 2,3		TDD
	Config 4		HD-FDD
TDD configuration	Config 1,4		Not Applicable
	Config 2		TDDConf.1.1
	Config 3		TDDConf.2.1
BW _{channel}	Config 1		10 MHz: N _{RB,c} = 52
	Config 2		10 MHz: N _{RB,c} = 52
	Config 3		20 MHz: N _{RB,c} = 51
	Config 4		10 MHz: N _{RB,c} = 52
Active DL BWP ID		Config 1,2, 3,4	0
Initial DL BWP Configuration (BWP-1)		Config 1,2, 3,4	DLBWP.0.2
Initial UL BWP Configuration		Config 1,2, 3,4	ULBWP.0.2
Initial Condition	Active DL CBW Configuration (CBW-1)	Config 1, 2, 3,4	DLCBW.1.1
	Active UL CBW Configuration (CBW-1)	Config 1, 2, 3,4	ULCBW.1.1
Final Condition	Active DL CBW Configuration (CBW-2)	Config 1, 2, 3,4	DLCBW.1.2
	Active UL CBW Configuration (CBW-2)	Config 1, 2, 3,4	ULCBW.1.2
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD
		Config 2	SR.1.1 TDD

RMSI CORESET parameters	Config 3		SR2.1 TDD
	Config 1,4		CR.1.1 FDD
	Config 2		CR.1.1 TDD
	Config 3		CR2.1 TDD
Dedicated CORESET parameters	Config 1,4		CCR.1.1 FDD
	Config 2		CCR.1.1 TDD
	Config 3		CCR.2.1 TDD
OCNG Patterns			OP.1
SSB Configuration	Config 1,2,4		SSB.1 FR1
	Config 3		SSB.1 RedCap FR1
SMTC Configuration			SMTC.1 RedCap FR1
TRS Configuration	Config 1,4		TRS.1.1 FDD
	Config 2		TRS.1.1 TDD
	Config 3		TRS.1.2 TDD
Antenna Configuration			1x2 Low
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS ^(Note 1)			
EPRE ratio of OCNG to OCNG DMRS ^(Note 1)			
N _{oc} ^{Note 2}	Config 1,2,4	dBm/SCS	-104
	Config 3		-101
SS-RSRP ^{Note 3}	Config 1,2,4	dBm/SCS	-87
	Config 3		-84
E _s /I _{ot}		dB	17
E _s /N _{oc}		dB	17
I _O ^{Note3}	Config 1,2,4	dBm/ 9.36MHz	-58.96
	Config 3	dBm/ 18.36MHz	-56.04
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.		
Note 3:	SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.1 is linked with ULBWP.0.1; DLBWP.1.1 is linked with ULBWP.1.1; as defined in clause 12 of TS 38.213 [3].		

A.16.5.4.2.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for the Cell 1 from the first DL slot that occurs right after the beginning of slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length}$ and starts to report valid ACK/NACK for Cell 1 from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR\ Slot\ length} + k1$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed UE specific CBW change delay on the Cell 1 to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.6 Measurement procedure for RedCap

A.16.6.1 Intra-frequency Measurements

A.16.6.1.1 SA event triggered reporting tests without gap under non-DRX for 1 Rx UE

A.16.6.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2B.5.1 and 9.2B.5.2.

A.16.6.1.1.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table A.16.6.1.1.1-1 and A.16.6.1.1.1-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.16.6.1.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.1.1.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4	Cell 1	
Neighbour cell		1, 2, 3, 4	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2	
CD-SSB configuration		1,2,4	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
NCD-SSB configuration		1, 4	SSB.6 RedCap FR1 (Note 1)	
		2	SSB.6 RedCap FR1 (Note 1)	
		3	SSB.7 RedCap FR1 (Note 1)	
SMTC configuration for NCD-SSB		1, 4	SMTC.4 RedCap	
		2	SMTC.2 RedCap	
		3	SMTC.2 RedCap	
A3-Offset	dB	1, 2, 3, 4	-4.5	
CP length		1, 2, 3, 4	Normal	
Hysteresis	dB	1, 2, 3, 4	0	
Time To Trigger	s	1, 2, 3, 4	0	
Filter coefficient		1, 2, 3, 4	0	L3 filtering is not used
DRX		1, 2, 3, 4		OFF
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s	Synchronous cells

		3	3 μ s	Synchronous cells
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	
Note 1: NCD-SSB is configured within dedicated RedCap DL BWP.				

Table A.16.6.1.1.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3,4	OP.1		OP.1	
TRS Configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.3 RedCap		DLBWP.1.3 RedCap	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.3 RedCap		ULBWP.1.3 RedCap	
RLM-RS		1, 2, 3, 4	SSB		SSB	
N_{oc} ^{Note 2}	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note 2}	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP ^{Note 3}	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91

Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/18.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1, 2, 3, 4	AWGN			
Antenna Configuration			1x1		1x1	
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.16.6.1.1.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1000 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.2 SA event triggered reporting tests without gap under non-DRX for 2 Rx UE

A.16.6.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clauses 9.2B.5.1 and 9.2B.5.2.

A.16.6.1.2.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table A.16.6.1.2.1-1 and A.16.6.1.2.1-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.16.6.1.2.1-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.1.2.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4	Cell 1	
Neighbour cell		1, 2, 3, 4	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2	
CD-SSB configuration		1,2,4	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
NCD-SSB configuration		1, 4	SSB.6 RedCap FR1 (Note 1)	
		2	SSB.6 RedCap FR1 (Note 1)	
		3	SSB.7 RedCap FR1 (Note 1)	
SMTC configuration for NCD-SSB		1, 4	SMTC.4 RedCap	
		2	SMTC.2 RedCap	
		3	SMTC.2 RedCap	
A3-Offset	dB	1, 2, 3, 4	-4.5	
CP length		1, 2, 3, 4	Normal	
Hysteresis	dB	1, 2, 3, 4	0	
Time To Trigger	s	1, 2, 3, 4	0	
Filter coefficient		1, 2, 3, 4	0	L3 filtering is not used
DRX		1, 2, 3, 4		OFF
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	
Note 1: NCD-SSB is configured within dedicated RedCap DL BWP.				

Table A.16.6.1.2.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3,4	OP.1		OP.1	
TRS Configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	

		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.3 RedCap		DLBWP.1.3 RedCap	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.3 RedCap		ULBWP.1.3 RedCap	
RLM-RS		1, 2, 3, 4	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/18.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1, 2, 3, 4	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.16.6.1.2.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 100 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.3 SA event triggered reporting tests without gap under DRX for 1 Rx UE

A.16.6.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in clauses 9.2B.5.1 and 9.2B.5.2.

A.16.6.1.3.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.16.6.1.3.2-1, A.16.6.1.3.2-2 and A.16.6.1.3.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.1.3.2-1: Supported test configurations for NR Redcap UE

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.1.3.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3, 4	Cell 1		
Neighbour cell		1, 2, 3, 4	Cell 2		Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2		
SSB configuration		1, 4	SSB.1 FR1		
		2	SSB.1 FR1		
		3	SSB.1 RedCap FR1		
SMTC configuration		1, 4	SMTC.2		
		2	SMTC.1		
		3	SMTC.1		
A3-Offset	dB	1, 2, 3, 4	-4.5		
CP length		1, 2, 3, 4	Normal		
Hysteresis	dB	1, 2, 3, 4	0		
Time To Trigger	s	1, 2, 3, 4	0		
Filter coefficient		1, 2, 3, 4	0		L3 filtering is not used
DRX		1, 2, 3, 4	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1, 4	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s		Synchronous cells
		3	3 μ s		Synchronous cells

T1	s	1, 2, 3, 4	5		
T2	s	1, 2, 3, 4	5	10	

Table A.16.6.1.3.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD		N/A	
		3	CCR.2.1 TDD		N/A	
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
N_{oc} ^{Note 2}	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} ^{Note 2}	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP ^{Note 3}	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/18.36 MHz	3	-61.68	-59.34	-61.68	-59.34

Propagation Condition		1, 2, 3, 4	AWGN
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		

A.16.6.1.3.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 7680 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.4 SA event triggered reporting tests without gap under DRX for 2 Rx UE

A.16.6.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in clauses 9.2B.5.1 and 9.2B.5.2.

A.16.6.1.4.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.16.6.1.4.2-1, A.16.6.1.4.2-2 and A.16.6.1.4.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.1.4.2-1: Supported test configurations for NR Redcap UE

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.1.3.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3, 4	Cell 1		
Neighbour cell		1, 2, 3, 4	Cell 2		Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2		
SSB configuration		1, 4	SSB.1 FR1		
		2	SSB.1 FR1		
		3	SSB.1 RedCap FR1		
SMTC configuration		1, 4	SMTC.2		
		2	SMTC.1		
		3	SMTC.1		
A3-Offset	dB	1, 2, 3, 4	-4.5		
CP length		1, 2, 3, 4	Normal		
Hysteresis	dB	1, 2, 3, 4	0		
Time To Trigger	s	1, 2, 3, 4	0		
Filter coefficient		1, 2, 3, 4	0		L3 filtering is not used
DRX		1, 2, 3, 4	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1, 4	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s		Synchronous cells
		3	3 μ s		Synchronous cells
T1	s	1, 2, 3, 4	5		
T2	s	1, 2, 3, 4	5	10	

Table A.16.6.1.4.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		N/A	
		2	CCR.1.1 TDD			
		3	CCR.2.1 TDD			
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1		DLBWP.0.1	
			ULBWP.0.1		ULBWP.0.1	

Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/18.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1, 2, 3, 4	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.16.6.1.4.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.5 SA event triggered reporting tests with per-UE gaps under non-DRX for 1 Rx UE

A.16.6.1.5.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2B.6.1 and 9.2B.6.2.

A.16.6.1.5.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.16.6.1.5.2-1 and A.16.6.1.5.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.16.6.1.5.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.1.5.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4	Cell 1	
Neighbour cell		1, 2, 3, 4	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2	
Measurement gap type		1, 2, 3, 4	Per-UE gaps	
Measurement gap repetition periodicity	ms	1, 2, 3, 4	40	
Measurement gap length	ms	1, 2, 3, 4	6	
Measurement gap offset	ms	1, 2, 3, 4	39	
SSB configuration		1, 2, 4	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1, 4	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
CSI-RS parameters		1, 4	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3, 4	-4.5	
CP length		1, 2, 3, 4	Normal	
Hysteresis	dB	1, 2, 3, 4	0	
Time To Trigger	s	1, 2, 3, 4	0	

Filter coefficient		1, 2, 3, 4	0	L3 filtering is not used
DRX	ms	1, 2, 3, 4	N/A	OFF
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	

Table A.16.6.1.5.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1, 4	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD			
		3	CCR.2.3 TDD			
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.2 RedCap		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	DLBWP.1.2 RedCap		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				

		3				
SS-RSRP ^{Note 3}	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/18.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1, 2, 3, 4	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves					

A.16.6.1.5.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to 2xTTIDCCH higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.6 SA event triggered reporting tests with per-UE gaps under non-DRX for 2 Rx UE

A.16.6.1.6.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell search requirements in clause 9.2B.6.1 and 9.2B.6.2.

A.16.6.1.6.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.16.6.1.6.2-1 and A.16.6.1.6.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.16.6.1.6.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode

Note: The UE is only required to be tested in one of the supported test configurations.

Table A.16.6.1.6.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4	Cell 1	
Neighbour cell		1, 2, 3, 4	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2	
Measurement gap type		1, 2, 3, 4	Per-UE gaps	
Measurement gap repetition periodicity	ms	1, 2, 3, 4	40	
Measurement gap length	ms	1, 2, 3, 4	6	
Measurement gap offset	ms	1, 2, 3, 4	39	
SSB configuration		1, 2, 4	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTTC configuration		1, 4	SMTTC.2	
		2	SMTTC.1	
		3	SMTTC.1	
CSI-RS parameters		1, 4	CSI-RS.1.2 FDD resource #0	
		2	CSI-RS.1.2 TDD resource #0	
		3	CSI-RS.2.2 TDD resource #0	
A3-Offset	dB	1, 2, 3, 4	-4.5	
CP length		1, 2, 3, 4	Normal	
Hysteresis	dB	1, 2, 3, 4	0	
Time To Trigger	s	1, 2, 3, 4	0	
Filter coefficient		1, 2, 3, 4	0	L3 filtering is not used
DRX	ms	1, 2, 3, 4	N/A	OFF
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	

Table A.16.6.1.6.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	

Dedicated CORESET RMC configuration		3	CR.2.1 TDD		N/A	
		1, 4	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD		N/A	
		3	CCR.2.3 TDD		N/A	
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.2 RedCap		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	DLBWP.1.2 RedCap		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/18.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1, 2, 3, 4	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.16.6.1.6.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times T_{TTIDCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.7 SA event triggered reporting tests with per-UE gaps under DRX for 1 Rx UE

A.16.6.1.7.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in clauses 9.2B.6.1 and 9.2B.6.2.

A.16.6.1.7.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.16.6.1.7.2-1, A.16.6.1.7.2-2 and A.16.6.1.7.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.1.7.2-1: Supported test configurations for NR Redcap UE

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.1.7.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3, 4	Cell 1		
Neighbour cell		1, 2, 3, 4	Cell 2		Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2		
Measurement gap type		1, 2, 3, 4,	Per-UE gaps		
Measurement gap repetition periodicity	ms	1, 2, 3, 4	40		
Measurement gap length	ms	1, 2, 3, 4	6		
Measurement gap offset	ms	1, 2, 3, 4	39		
SSB configuration		1, 4	SSB.1 FR1		
		2	SSB.1 FR1		
		3	SSB.1 RedCap FR1		

SMTC configuration		1, 4	SMTC.2		
		2	SMTC.1		
		3	SMTC.1		
CSI-RS parameters		1, 4	CSI-RS.1.2 FDD resource #0		
		2	CSI-RS.1.2 TDD resource #0		
		3	CSI-RS.2.2 TDD resource #0		
A3-Offset	dB	1, 2, 3, 4	-4.5		
CP length		1, 2, 3, 4	Normal		
Hysteresis	dB	1, 2, 3, 4	0		
Time To Trigger	s	1, 2, 3, 4	0		
Filter coefficient		1, 2, 3, 4	0		L3 filtering is not used
DRX		1, 2, 3, 4	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1, 4	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μs		Synchronous cells
		3	3 μs		Synchronous cells
T1	s	1, 2, 3, 4	5		
T2	s	1, 2, 3, 4	5	10	

Table A.16.6.1.7.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD			
		3	CR.2.1 TDD			
Dedicated CORESET RMC configuration		1, 4	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD			
		3	CCR.2.3 TDD			
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.2 RedCap		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.2 RedCap		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			

		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/16.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1, 2, 3, 4	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.16.6.1.7.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 7680 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.8 SA event triggered reporting tests with per-UE gaps under DRX for 2 Rx UE

A.16.6.1.8.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in clauses 9.2B.6.1 and 9.2B.6.2.

A.16.6.1.8.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.16.6.1.8.2-1, A.16.6.1.8.2-2 and A.16.6.1.8.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.1.8.2-1: Supported test configurations for NR Redcap UE

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.1.8.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
Active cell		1, 2, 3, 4	Cell 1		
Neighbour cell		1, 2, 3, 4	Cell 2		Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2		
Measurement gap type		1, 2, 3, 4	Per-UE gaps		
Measurement gap repetition periodicity	ms	1, 2, 3, 4	40		
Measurement gap length	ms	1, 2, 3, 4	6		
Measurement gap offset	ms	1, 2, 3, 4	39		
SSB configuration		1, 4	SSB.1 FR1		
		2	SSB.1 FR1		
		3	SSB.1 RedCap FR1		
SMTC configuration		1, 4	SMTC.2		
		2	SMTC.1		
		3	SMTC.1		
CSI-RS parameters		1, 4	CSI-RS.1.2 FDD resource #0		
		2	CSI-RS.1.2 TDD resource #0		
		3	CSI-RS.2.2 TDD resource #0		
A3-Offset	dB	1, 2, 3, 4	-4.5		
CP length		1, 2, 3, 4	Normal		
Hysteresis	dB	1, 2, 3, 4	0		
Time To Trigger	s	1, 2, 3, 4	0		
Filter coefficient		1, 2, 3, 4	0		L3 filtering is not used

DRX		1, 2, 3, 4	DRX.1	DRX. 7	
Time offset between serving and neighbour cells		1, 4	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s		Synchronous cells
		3	3 μ s		Synchronous cells
T1	s	1, 2, 3, 4	5		
T2	s	1, 2, 3, 4	5	10	

Table A.16.6.1.8.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gap for PCell in FR1 with DRX

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		N/A	
		2	CR.1.1 TDD		N/A	
		3	CR.2.1 TDD		N/A	
Dedicated CORESET RMC configuration		1, 4	CCR.1.2 FDD		N/A	
		2	CCR.1.2 TDD		N/A	
		3	CCR.2.3 TDD		N/A	
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.2 RedCap		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.2 RedCap		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				

SS-RSRP ^{Note 3}	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/18.36 MHz	3	-61.68	-59.34	-61.68	-59.34
Propagation Condition		1, 2, 3, 4	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.16.6.1.8.3 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 6400 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.9 SA event triggered reporting tests without gap under non-DRX with SSB index reading for 1 Rx UE

A.16.6.1.9.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2B.5.1 and 9.2B.5.2.

A.16.6.1.9.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for FDD PCell and neighbour cell are given in Table A.16.6.1.9.2-1 and A.16.6.1.9.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.16.6.1.9.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode

Table A.16.6.1.9.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	
CD-SSB configuration		1, 2	SSB.1 FR1	
NCD-SSB configuration		1, 2	SSB.6 RedCap FR1 ^{Note 1}	
SMTC configuration for CD-SSB		1, 2	SMTC.2	
SMTC configuration for NCD-SSB		1, 2	SMTC.4 RedCap	
A3-Offset	dB	1, 2	-4.5	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX	ms	1, 2	N/A	OFF
Time offset between serving and neighbour cells		1, 2	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1, 2	5	
T2	s	1, 2	5	

Note 1: NCD-SSB is configured within dedicated RedCap DL BWP.

Table A.16.6.1.9.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	N/A		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.3 RedCap ^{Note 4}		DLBWP.1.3 RedCap ^{Note 4}	
Active UL BWP configuration		1, 2	ULBWP.1.3 RedCap ^{Note 5}		ULBWP.1.3 RedCap ^{Note 5}	
RLM-RS		1, 2,	SSB		SSB	
N_{oc} ^{Note 2}	dBm/SCS	1, 2	-98			
N_{oc} ^{Note 2}	dBm/15 kHz	1, 2	-98			
$\hat{E}_s / I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s / N_{oc}$	dB	1, 2	4	4	-Infinity	4

SS-RSRP ^{Note 3}	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1, 2	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	The starting PRB index for dedicated DL BWP1 corresponding to CD-SSB PRB index; the starting PRB index for dediacted DL BWP2 corresponding to NCD-SSB PRB index;					
Note 5:	The starting PRB index for dedicated UL BWP1 is the same as the starting PRB index for dedicated DL BWP1; the starting PRB index for dedicated UL BWP2 is the same as the starting PRB index for dedicated DL BWP2.					

A.16.6.1.9.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1480 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.10 SA event triggered reporting tests without gap under non-DRX with SSB index reading for 2 Rx UE

A.16.6.1.10.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the FDD intra-frequency cell search requirements in clause 9.2.5.1 and 9.2.5.2.

A.16.6.1.10.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for FDD PCell and neighbour cell are given in Table A.16.6.1.10.2-1 and A.16.6.1.10.2-2 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.16.6.1.10.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode

Table A.16.6.1.10.2-2: General test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2	Cell 1	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	
CD-SSB configuration		1, 2	SSB.1 FR1	
NCD-SSB configuration		1, 2	SSB.6 RedCap FR1 ^{Note 1}	
SMTC configuration for CD-SSB		1, 2	SMTC.2	
SMTC configuration for NCD-SSB		1, 2	SMTC.4 RedCap	
A3-Offset	dB	1, 2, 3, 4	-4.5	
CP length		1, 2, 3, 4	Normal	
Hysteresis	dB	1, 2, 3, 4	0	
Time To Trigger	s	1, 2, 3, 4	0	
Filter coefficient		1, 2, 3, 4	0	L3 filtering is not used
DRX	ms	1, 2, 3, 4	N/A	OFF
Time offset between serving and neighbour cells		1, 2, 3, 4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	
Note 1: NCD-SSB is configured within dedicated RedCap DL BWP.				

Table A.16.6.1.10.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting without gap for FDD PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	N/A		N/A	
PDSCH RMC configuration		1, 2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1, 2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1, 2	CCR.1.1 FDD		N/A	
OCNG Patterns		1, 2	OP.1		OP.1	
TRS configuration		1, 2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1, 2	DLBWP.0,1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP2 configuration		1, 2	DLBWP.1.3 RedCap ^{Note 4}		DLBWP.1.3 RedCap ^{Note 4}	
Active UL BWP2 configuration		1, 2	ULBWP.1.3 RedCap ^{Note 5}		ULBWP.1.3 RedCap ^{Note 5}	
RLM-RS		1, 2	SSB		SSB	
N_{oc} ^{Note 2}	dBm/SCS	1, 2	-98			
N_{oc} ^{Note 2}	dBm/15 kHz	1, 2	-98			
$\hat{E}_s/I_{ot}$	dB	1, 2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1, 2	4	4	-Infinity	4

SS-RSRP ^{Note 3}	dBm/SCS kHz	1, 2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1, 2, 4	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1, 2	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	The starting PRB index for dedicated DL BWP1 corresponding to CD-SSB PRB index; the starting PRB index for dediacted DL BWP2 corresponding to NCD-SSB PRB index;					
Note 5:	The starting PRB index for dedicated UL BWP1 is the same as the starting PRB index for dedicated DL BWP1; the starting PRB index for dedicated UL BWP2 is the same as the starting PRB index for dedicated DL BWP2.					

A.16.6.1.10.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1240 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index and report the acquired SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.11 SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 1 Rx UE

A.16.6.1.11.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in clauses 9.2B.6.1 and 9.2B.6.2.

A.16.6.1.11.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.16.6.1.11.2-1, A.16.6.1.11.2-2 and A.16.6.1.11.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.16.6.1.11.2-1: Supported test configurations for NR Redcap UE

Configuration	Description
1	15 kHz SSB SCS, 10 MHz UE bandwidth, FDD duplex mode

2	15 kHz SSB SCS, 10 MHz UE bandwidth, HD-FDD duplex mode
---	---

Table A.16.6.1.11.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1,2	Cell 1	
Neighbour cell		1,2	Cell 2	Cell to be identified.
RF Channel Number		1,2	1: Cell 1 and Cell 2	
Measurement gap type		1,2	Per-UE gaps	
Measurement gap repetition periodicity	ms	1,2	40	
Measurement gap length	ms	1,2	6	
Measurement gap offset	ms	1,2	39	
CD-SSB configuration		1,2	SSB.1 FR1	
SMTC configuration for CD-SSB		1,2	SMTC.2	
CSI-RS parameters		1, 2	CSI-RS.1.2 FDD resource #0	
A3-Offset	dB	1,2	-4.5	
CP length		1,2	Normal	
Hysteresis	dB	1,2	0	
Time To Trigger	s	1,2	0	
Filter coefficient		1,2	0	L3 filtering is not used
DRX		1,2	N/A	OFF
Time offset between serving and neighbour cells		1,2	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1,2	5	
T2	s	1,2	5	

Table A.16.6.1.11.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gap for PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,2	N/A		N/A	
PDSCH RMC configuration		1,2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1,2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1,2	CCR.1.2 FDD		N/A	
OCNG Patterns		1,2	OP.1		OP.1	
TRS configuration		1,2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1,2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP2 configuration		1,2	DLBWP.1.2 RedCap		DLBWP.1.1	
Active UL BWP2 configuration		1,2	ULBWP.1.2 RedCap		ULBWP.1.1	
RLM-RS		1,2	CSI-RS		SSB	

N_{oc} Note 2	dBm/SCS	1,2	-98			
N_{oc} Note 2	dBm/15 kHz	1,2	-98			
$\hat{E}_s/I_{ot}$	dB	1,2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1,2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1,2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1,2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1,2	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.16.6.1.11.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.1.12 SA event triggered reporting tests with per-UE gaps under non-DRX with SSB index reading for 2 Rx UE

A.16.6.1.12.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the intra-frequency cell identification and measurement period requirements in clauses 9.2B.6.1 and 9.2B.6.2.

A.16.6.1.12.2 Test parameters

Two cells are deployed in the test, which are FR1 PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for PCell are given in Table A.16.6.1.12.2-1, A.16.6.1.12.2-2 and A.16.6.1.12.2-3 below. In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

Table A.16.6.1.12.2-1: Supported test configurations for NR Redcap UE

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode

Table A.16.6.1.12.2-2: General test parameters for SA intra-frequency event triggered reporting with per-UE gaps for PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Value	Comment
Active cell		1,2	Cell 1	
Neighbour cell		1,2	Cell 2	Cell to be identified.
RF Channel Number		1,2	1: Cell 1 and Cell 2	
Measurement gap type		1,2	Per-UE gaps	
Measurement gap repetition periodicity	ms	1,2	40	
Measurement gap length	ms	1,2	6	
Measurement gap offset	ms	1,2	39	
CD-SSB configuration		1,2	SSB.1 FR1	
SMTC configuration for CD-SSB		1,2	SMTC.2	
CSI-RS parameters		1, 2	CSI-RS.1.2 FDD resource #0	
A3-Offset	dB	1,2	-4.5	
CP length		1,2	Normal	
Hysteresis	dB	1,2	0	
Time To Trigger	s	1,2	0	
Filter coefficient		1,2	0	L3 filtering is not used
DRX		1,2	N/A	OFF
Time offset between serving and neighbour cells		1,2	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
T1	s	1,2	5	
T2	s	1,2	5	

Table A.16.6.1.11.2-3: NR Cell specific test parameters for SA intra-frequency event triggered reporting with per-UE gap for PCell in FR1 with SSB index reading

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1,2	N/A		N/A	
PDSCH RMC configuration		1,2	SR.1.1 FDD		N/A	
RMSI CORESET RMC configuration		1,2	CR.1.1 FDD		N/A	
Dedicated CORESET RMC configuration		1,2	CCR.1.2 FDD		N/A	
OCNG Patterns		1,2	OP.1		OP.1	
TRS configuration		1,2	TRS.1.1 FDD		N/A	
Initial BWP configuration		1,2	DLBWP.0.1	ULBWP.0.1	DLBWP.0.1	ULBWP.0.1
Active DL BWP2 configuration		1,2	DLBWP.1.2 RedCap		DLBWP.1.1	

Active UL BWP 2 configuration		1,2	ULBWP.1.2 RedCap		ULBWP.1.1	
RLM-RS		1,2	CSI-RS		SSB	
N_{oc} Note 2	dBm/SCS	1,2	-98			
N_{oc} Note 2	dBm/15 kHz	1,2	-98			
$\hat{E}_s/I_{ot}$	dB	1,2	4	-1.46	-Infinity	-1.46
$\hat{E}_s/N_{oc}$	dB	1,2	4	4	-Infinity	4
SS-RSRP Note 3	dBm/SCS kHz	1,2	-94	-94	-Infinity	-94
Io	dBm/9.36 MHz	1,2	-64.60	-62.25	-64.60	-62.25
Propagation Condition		1,2	AWGN			
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.16.6.1.12.3 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE is required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2 Inter-frequency Measurements

A.16.6.2.1 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 1 Rx UE

A.16.6.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.1.1-1, A.16.6.2.1.1-2 and A.16.6.2.1.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.2.1.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configurati on	Value				Comment
			Test 1		Test 2		
NR RF Channel Number		Config 1,2,3,4	1, 2				Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)				NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2				NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0				As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4	9				
A3-Offset	dB	Config 1,2,3,4	-6				
Hysteresis	dB	Config 1,2,3,4	0				
CP length		Config 1,2,3,4	Normal				
TimeToTrigger	s	Config 1,2,3,4	0				
Filter coefficient		Config 1,2,3,4	0				L3 filtering is not used
DRX		Config 1,2,3,4	DRX.1		DRX. 7		As specified in clause A.3.3
DRX		Config 1,2,3,4	DRX .1	DRX . 7	DRX .1	DRX . 7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,4	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs				Synchronous cells.
T1	s	Config 1,2,3,4	5				
T2	s	Config 1,2,3,4	1.1		12		

Table A.16.6.2.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration n	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP BW		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP configuration n	Initial DL BWP		Config 1, 2, 3,4	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3,4	ULBWP.0.1		NA	
	Dedicated DL BWP		Config 1, 2, 3,4	DLBWP.1.1		NA	
	Dedicated UL BWP		Config 1, 2, 3,4	ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD		NA	
			Config 3	SR2.1 TDD		NA	
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD		NA	
			Config 2	CR.1.1 TDD		NA	
			Config 3	CR.2.1 TDD		NA	
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD		NA	
			Config 2	CCR.1.1 TDD		NA	
			Config 3	CCR.2.1 TDD		NA	
SSB parameters			Config 1,4	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							

EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15 kHz	Config 1,2,3,4	-98		-98	
N_{oc}^{Note2}	dBm/S CS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
I_o^{Note3}	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

Table A.16.6.2.1.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test1&3	Test2&4	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.16.6.2.1.1-5: *TimeAlignmentTimer* -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
-------	-------	---------

TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]
--------------------	-------	---

A.16.6.2.1.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 11520 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.2 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is used for 2 Rx UE

A.16.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.2.2.1-1, A.16.6.2.2.1-2 and A.16.6.2.2.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.2.2.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.2.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	

NR RF Channel Number		Config 1,2,3,4	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4	9		
A3-Offset	dB	Config 1,2,3,4	-6		
Hysteresis	dB	Config 1,2,3,4	0		
CP length		Config 1,2,3,4	Normal		
TimeToTrigger	s	Config 1,2,3,4	0		
Filter coefficient		Config 1,2,3,4	0		L3 filtering is not used
DRX		Config 1,2,3,4	DRX.1	DRX. 7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,4	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3,4	5		
T2	s	Config 1,2,3,4	1.1	11	

Table A.16.6.2.2.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration n	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP BW		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3,4	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3,4	ULBWP.0.1		NA	

	Dedicated DL BWP			DLBWP.1.1	NA	
	Dedicated UL BWP			ULBWP.1.1	NA	
TRS configuration		Config 1,4	TRS.1.1 FDD	NA		
		Config 2	TRS.1.1 TDD	NA		
		Config 3	TRS.1.2 TDD	NA		
OCNG Patterns defined in A.3.2.1.1 (OP.1)		Config 1,2,3,4	OP.1	OP.1		
PDSCH Reference measurement channel		Config 1,4	SR.1.1 FDD	NA		
		Config 2	SR.1.1 TDD	NA		
		Config 3	SR2.1 TDD	NA		
RMSI CORESET Reference Channel		Config 1,4	CR.1.1 FDD	NA		
		Config 2	CR.1.1 TDD	NA		
		Config 3	CR.2.1 TDD	NA		
Dedicated CORESET Reference Channel		Config 1,4	CCR.1.1 FDD	NA		
		Config 2	CCR.1.1 TDD	NA		
		Config 3	CCR.2.1 TDD	NA		
SSB parameters		Config 1,4	SSB.1 FR1	SSB.5 FR1		
		Config 2	SSB.1 FR1	SSB.5 FR1		
		Config 3	SSB.1 RedCap FR1	SSB.3 RedCap FR1		
SMTC configuration defined in A.3.11		Config 1,4	SMTC.2	SMTC.5		
		Config 2, 3	SMTC.1	SMTC.4		
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2, 4	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3, 4	0	0		
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz	Config 1,2,3	-98	-98		
N_{oc} ^{Note2}	dBm/S CS	Config 1,2	-98	-98		
		Config 3	-95	-95		
SSB_RRP ^{Note 3}	dBm/S CS	Config 1,2	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3	4	4	-Infinity	7

Io ^{Note3}	dBm/9.36MHz	Config 1,2	-64.59	-64.59	-70.05	-62.2
	dBm/38.16MHz	Config 3	-58.49	-58.49	-63.94	-56.15
Propagation Condition		Config 1,2,3	AWGN		AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					

Table A.16.6.2.2.1-4: DRX-Configuration for SA inter-frequency event triggered reporting without SSB time index detection

Field	Test 1	Test 2	Comment
	Value	Value	
drx-onDurationTimer	ms1	ms1	As specified in clause 6.3.2 in TS 38.331 [2]
drx-InactivityTimer	ms1	ms1	
drx-RetransmissionTimerDL	sl1	sl1	
drx-RetransmissionTimerUL	sl1	sl1	
drx-LongCycleStartOffset	ms40	Ms640	
shortDRX	disable	disable	

Table A.16.6.2.2.1-5: TimeAlignmentTimer -Configuration SA inter-frequency event triggered reporting without SSB time index detection

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.16.6.2.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.3 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used for 1 Rx UE

A.16.6.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.3.1-1, A.16.6.2.3.1-2 and A.16.6.2.3.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.16.6.2.3.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.3.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3,4	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4	9	
A3-Offset	dB	Config 1,2,3,4	-6	
Hysteresis	dB	Config 1,2,3,4	0	
CP length		Config 1,2,3,4	Normal	
TimeToTrigger	s	Config 1,2,3,4	0	
Filter coefficient		Config 1,2,3,4	0	L3 filtering is not used
DRX		Config 1,2,3,4	OFF	DRX is not used

Time offset between serving and neighbour cells		Config 1,4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3 μ s	Synchronous cells.
T1	s	Config 1,2,3,4	5	
T2	s	Config 1,2,3,4	1.1	

Table A.16.6.2.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP BW		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD			
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1,2,4	SSB.1 FR1		SSB.1 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4	15			

		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15 kHz		-98		-98	
N_{oc}^{Note2}	dBm/S CS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io ^{Note3}	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.72 MHz	Config 3	-61.68	-61.68	-67.13	-59.34
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

A.16.6.2.3.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1000 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.4 SA event triggered reporting tests for FR1 without SSB time index detection when DRX is not used for 2 Rx UE

A.16.6.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.4.1-1, A.16.6.2.4.1-2 and A.16.6.2.4.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.16.6.2.4.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
NR RF Channel Number		Config 1,2,3,4	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Gap Pattern Id		Config 1,2,3,4	0		As specified in 38.133 [6] clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4	9		
Measurement gap offset		Config 1,2,3,4	9	9	
A3-Offset	dB	Config 1,2,3,4	-6		
Hysteresis	dB	Config 1,2,3,4	0		
CP length		Config 1,2,3,4	Normal		
TimeToTrigger	s	Config 1,2,3,4	0		
Filter coefficient		Config 1,2,3,4	0		L3 filtering is not used
DRX		Config 1,2,3,4	OFF		DRX is not used

Time offset between serving and neighbour cells		Config 1,4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3,4	5	
T2	s	Config 1,2,3,4	1	

Table A.16.6.2.4.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP BW		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.2			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD		NA	
			Config 3	SR2.1 TDD		NA	
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD		NA	
			Config 2	CR.1.1 TDD		NA	
			Config 3	CR2.1 TDD		NA	
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD		NA	
			Config 2	CCR.1.1 TDD		NA	
			Config 3	CCR.2.1 TDD		NA	
SSB parameters			Config 1,2,4	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4	15			

		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}	dBm/15 kHz		-98		-98	
N_{oc}^{Note2}	dBm/S CS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SSB_RP ^{Note 3}	dBm/S CS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
Io ^{Note3}	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.72 MHz	Config 3	-61.68	-61.68	-67.13	-59.34
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB-RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

A.16.6.2.4.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 800 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.5 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 1 Rx UE

A.16.6.2.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.5.1-1, A.16.6.2.5.1-2 and A.16.6.2.5.1-3.7

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.16.6.2.5.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.5.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3,4	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4	9	
A3-Offset	dB	Config 1,2,3,4	-6	
Hysteresis	dB	Config 1,2,3,4	0	
CP length		Config 1,2,3,4	Normal	
TimeToTrigger	s	Config 1,2,3,4	0	
Filter coefficient		Config 1,2,3,4	0	L3 filtering is not used
DRX		Config 1,2,3,4	OFF	DRX is not used

Time offset between serving and neighbour cells		Config 1,4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3,4	5	
T2	s	Config 1,2,3,4	1.3	

Table A.16.6.2.5.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP BW		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD			
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1,2,4	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4	15			

		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz		-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SSB_RP ^{Note 3}	dBm/S CS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.72 MHz	Config 3	-61.68	-61.68	-67.13	-59.34
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Antenna Configuration		Config 1,2,3,4	1x1		1x1	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

A.16.6.2.5.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.6 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is not used for 2 Rx UE

A.16.6.2.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.6.1-1, A.16.6.2.6.1-2 and A.16.6.2.6.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.16.6.2.6.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.5.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3,4	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1,2,3,4	9	
A3-Offset	dB	Config 1,2,3,4	-6	
Hysteresis	dB	Config 1,2,3,4	0	
CP length		Config 1,2,3,4	Normal	
TimeToTrigger	s	Config 1,2,3,4	0	
Filter coefficient		Config 1,2,3,4	0	L3 filtering is not used
DRX		Config 1,2,3,4	OFF	DRX is not used

Time offset between serving and neighbour cells		Config 1,4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3,4	5	
T2	s	Config 1,2,3,4	1.1	

Table A.16.6.2.6.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP BW		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD			
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1,2,4	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4	15			

		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz	Config 1,2,3,4	-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SSB_RP ^{Note 3}	dBm/S CS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.36 MHz	Config 3	-61.68	-61.68	-67.13	-59.34
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Antenna Configuration		Config 1,2,3,4	1x2		1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

A.16.6.2.6.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.7 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 1 Rx UE

A.16.6.2.7.1 Test Purpose and Environment

The purpose of this test is to verify that 1 Rx RedCap UE makes correct reporting of an event in FR1. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.7.1-1, A.16.6.2.7.1-2 and A.16.6.2.7.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.2.7.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.7.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3,4	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0		As specified in clause 9.1A.2-1.
Measurement gap offset		Config 1,2,3,4	9		
A3-Offset	dB	Config 1,2,3,4	-6		
Hysteresis	dB	Config 1,2,3,4	0		
CP length		Config 1,2,3,4	Normal		
TimeToTrigger	s	Config 1,2,3,4	0		
Filter coefficient		Config 1,2,3,4	0		L3 filtering is not used
DRX		Config 1,2,3,4	DRX.1	DRX. 7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,4	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3 μs		Synchronous cells.
T1	s	Config 1,2,3,4	5		
T2	s	Config 1,2,3,4	1.5	16	

Table A.16.6.2.7.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter		Unit	Test configuration n	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP BW		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3,4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD		-	
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD		-	
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1,4	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							

EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz	Config 1,2,3,4	-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.36MHz	Config 3	-61.68	-61.68	-67.13	-59.34
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Antenna Configuration		Config 1,2,3,4	1x1		1x1	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

A.16.6.2.7.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1440 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 15360 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.8 SA event triggered reporting tests for FR1 with SSB time index detection when DRX is used for 2 Rx UE

A.16.6.2.8.1 Test Purpose and Environment

The purpose of this test is to verify that 2 Rx RedCap UE makes correct reporting of an event in FR1. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3.4.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.8.1-1, A.16.6.2.8.1-2 and A.16.6.2.8.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.2.8.1-1: SA event triggered reporting tests with SSB index reading for FR1-FR1

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.8.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1,2,3,4	1, 2		Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	0		As specified in clause 9.1A.2-1.
Measurement gap offset		Config 1,2,3,4	9		
A3-Offset	dB	Config 1,2,3,4	-6		
Hysteresis	dB	Config 1,2,3,4	0		
CP length		Config 1,2,3,4	Normal		
TimeToTrigger	s	Config 1,2,3,4	0		
Filter coefficient		Config 1,2,3,4	0		L3 filtering is not used
DRX		Config 1,2,3,4	DRX.1	DRX. 7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1,4	3 ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3 μ s		Synchronous cells.
T1	s	Config 1,2,3,4	5		
T2	s	Config 1,2,3,4	1.3	13.5	

Table A.16.6.2.8.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 with SSB time index detection

Parameter		Unit	Test configuration n	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1	FDD			
			Config 2,3	TDD			
			Config 4	HD-FDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP BW		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3,4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1,4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
RMSI CORESET Reference Channel			Config 1,4	CR.1.1 FDD		-	
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
Dedicated CORESET Reference Channel			Config 1,4	CCR.1.1 FDD		-	
			Config 2	CCR.1.1 TDD			
			Config 3	CCR.2.1 TDD			
SSB parameters			Config 1,4	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2		SMTC.5	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2,4	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							

EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz	Config 1,2,3,4	-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.26
	dBm/18.36MHz	Config 3	-61.68	-61.68	-67.13	-59.34
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Antenna Configuration		Config 1,2,3,4	1x2		1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

A.16.6.2.8.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and 2 UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.9 SA event triggered reporting tests with additional mandatory gap pattern for 1 Rx UE

A.16.6.2.9.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event when mandatory gap pattern with 3ms MGL is configured.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.9.1-1, A.16.6.2.9.1-2 and A.16.6.2.9.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.16.6.2.9.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.9.1-2: General test parameters for SA inter-frequency event triggered reporting with additional mandatory gap pattern

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
NR RF Channel Number		Config 1,2,3, 4	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3, 4	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3, 4	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3, 4	3	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1, 4	12	
		Config 2,3	9	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.

		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3	5	
T2	s	Config 1,2,3	1.5	

Table A.16.6.2.9.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting with additional mandatory gap pattern

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3, 4	1		2	
Duplex mode			Config 1, 4	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2, 4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP BW		MHz	Config 1,2, 4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1, 4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3, 4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1, 4	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR2.1 TDD			
CORESET Reference Channel			Config 1, 4	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
SSB parameters			Config 1, 4	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1, 4	SMTC.1		SMTC.9	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2, 4	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3, 4	0		0	
EPRE ratio of PBCH DMRS to SSS							

EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz		-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2, 4	-98		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2, 4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2, 4	-64.59	-64.59	-70.05	-62.26
	dBm/18.36MHz	Config 3	-61.66	-61.66	-67.11	-59.32
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

A.16.6.2.9.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1440 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.10 SA event triggered reporting tests with additional mandatory gap pattern for 2 Rx UE

A.16.6.2.10.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event when mandatory gap pattern with 3ms MGL is configured.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 2. The test parameters are given in Tables A.16.6.2.10.1-1, A.16.6.2.10.1-2 and A.16.6.2.10.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.16.6.2.10.1-1: SA event triggered reporting tests without SSB index reading for FR1-FR1

Config	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode,
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.10.1-2: General test parameters for SA inter-frequency event triggered reporting with additional mandatory gap pattern

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
NR RF Channel Number		Config 1,2,3,4	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3,4	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3,4	NR cell2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1,2,3,4	3	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1, 4	12	
		Config 2, 3	9	
A3-Offset	dB	Config 1,2,3	-6	
Hysteresis	dB	Config 1,2,3	0	
CP length		Config 1,2,3	Normal	
TimeToTrigger	s	Config 1,2,3	0	
Filter coefficient		Config 1,2,3	0	L3 filtering is not used
DRX		Config 1,2,3	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.

		Config 2,3	3μs		Synchronous cells.
T1	s	Config 1,2,3	5		
T2	s	Config 1,2,3	1.5	1	

Table A.16.6.2.10.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting with additional mandatory gap pattern

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3, 4	1		2	
Duplex mode			Config 1, 4	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2, 4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP BW		MHz	Config 1,2, 4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP			ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1, 4	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3, 4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1, 4	SR.1.1 FDD			
			Config 2	SR.1.1 TDD			
			Config 3	SR 2.1 TDD			
CORESET Reference Channel			Config 1, 4	CR.1.1 FDD			
			Config 2	CR.1.1 TDD			
			Config 3	CR2.1 TDD			
SSB parameters			Config 1, 4	SSB.1 FR1		SSB.5 FR1	
			Config 2	SSB.1 FR1		SSB.5 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.3 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1, 4	SMTC.1		SMTC.9	
			Config 2, 3	SMTC.1		SMTC.4	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2, 4	15			
			Config 3	30			
EPRE ratio of PSS to SSS			Config 1,2,3, 4	0		0	
EPRE ratio of PBCH DMRS to SSS							

EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz		-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2, 4	-98		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2, 4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2, 4	-64.59	-64.59	-70.05	-62.26
	dBm/18.36MHz	Config 3	-61.66	-61.66	-67.11	-59.32
Propagation Condition		Config 1,2,3,4	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

A.16.6.2.10.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1440 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.11 SA event triggered reporting tests for FR1 when DRX is used for 1 Rx UE

A.16.6.2.11.1 Test Purpose and Environment

The purpose of this test is to verify that the UE which supports interFrequencyMeas-Nogap-r16 makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search without measurement gap requirements in clause 9.3B.7.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on RF channel 2. The SSB of cell 2 is completely within UE's active BWP BW. The RBs containing SSB from cell 1 and cell 2 should be different in frequency location within the cell bandwidth. The test parameters are given in Tables A.16.6.2.11.1-1, A.16.6.2.11.1-2 and A.16.6.2.11.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.2.11.1-1: SA event triggered reporting tests when DRX is used for FR1-FR1

Config	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.11.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 when DRX is used

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3, 4	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3, 4	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3, 4	NR cell2	NR cell 2 is on NR RF channel number 2.
A3-Offset	dB	Config 1,2,3, 4	-6	
Hysteresis	dB	Config 1,2,3, 4	0	
CP length		Config 1,2,3, 4	Normal	
TimeToTrigger	s	Config 1,2,3, 4	0	
Filter coefficient		Config 1,2,3, 4	0	L3 filtering is not used
DRX		Config 1,2,3, 4	DRX.1	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1, 4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.

		Config 2,3	3 μ s	Synchronous cells.
T1	s	Config 1,2,3, 4	5	
T2	s	Config 1,2,3, 4	1	

Table A.16.6.2.11.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 when DRX is used

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1,4	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP configuration	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3, 4	ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD		NA	
			Config 3	SR2.1 TDD		NA	
CORESET Reference Channel			Config 1,4	CR.1.1 FDD		NA	
			Config 2	CR.1.1 TDD		NA	
			Config 3	CR2.1 TDD		NA	
SSB parameters			Config 1,4	SSB.1 FR1		SSB.1 FR1	
			Config 2	SSB.1 FR1		SSB.1 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.1 RedCap FR1	
SMTC configuration defined in A.3.11			Config 1,4	SMTC.2		SMTC.2	
			Config 2, 3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1,2, 4	15			
			Config 3	30			
EPRE ratio of PSS to SSS				0		0	

EPRE ratio of PBCH DMRS to SSS		Config 1,2,3,4				
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz	Config 1,2,3,4	-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.2
	dBm/18.36MHz	Config 3	-61.66	-61.66	-67.11	-59.32
Propagation Condition		Config 1,2,3	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

Table A.16.6.2.11.1-4: TimeAlignmentTimer -Configuration SA inter-frequency event triggered reporting when DRX is used

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.16.6.2.11.2 Test Requirements

In test config 1, UE is required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test config 2 and 3, UE is not required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.2.12 SA event triggered reporting tests for FR1 when DRX is used for 2 Rx UE

A.16.6.2.12.1 Test Purpose and Environment

The purpose of this test is to verify that the UE which supports interFrequencyMeas-Nogap-r16 makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search without measurement gap requirements in clause 9.3B.7.

In this test, there are two cells: NR cell 1 as PCell in FR1 on NR RF channel 1 and NR cell 2 as neighbour cell in FR1 on RF channel 2. The SSB of cell 2 is completely within UE's active BWP BW. The RBs containing SSB from cell 1 and cell 2 should be different in frequency location within the cell bandwidth. The test parameters are given in Tables A.16.6.2.12.1-1, A.16.6.2.12.1-2 and A.16.6.2.12.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

UE needs to be provided at least once every 500ms with new Timing Advance Command MAC control element to restart the Time alignment timer to keep UE uplink time alignment. Furthermore, UE is allocated with PUSCH resource at every DRX cycle.

Table A.16.6.2.12.1-1: SA event triggered reporting tests when DRX is used for FR1-FR1

Config	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	
Note 2: target NR cell has the same SCS, BW and duplex mode as NR serving cell	

Table A.16.6.2.12.1-2: General test parameters for SA inter-frequency event triggered reporting for FR1 when DRX is used

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1,2,3, 4	1, 2	Two FR1 NR carrier frequencies is used.
Active cell		Config 1,2,3, 4	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1,2,3, 4	NR cell2	NR cell 2 is on NR RF channel number 2.
A3-Offset	dB	Config 1,2,3, 4	-6	
Hysteresis	dB	Config 1,2,3, 4	0	

CP length		Config 1,2,3, 4	Normal	
TimeToTrigger	s	Config 1,2,3, 4	0	
Filter coefficient		Config 1,2,3, 4	0	L3 filtering is not used
DRX		Config 1,2,3, 4	DRX.1	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1, 4	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		Config 2,3	3μs	Synchronous cells.
T1	s	Config 1,2,3, 4	5	
T2	s	Config 1,2,3, 4	1.5	

Table A.16.6.2.12.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR1 when DRX is used

Parameter		Unit	Test configuration n	Cell 1		Cell 2	
				T1	T2	T1	T2
NR RF Channel Number			Config 1,2,3,4	1		2	
Duplex mode			Config 1,4	FDD			
			Config 2,3	TDD			
TDD configuration			Config 1,4	Not Applicable			
			Config 2	TDDConf.1.1			
			Config 3	TDDConf.2.1			
BW _{channel}		MHz	Config 1,2,4	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP BW		MHz	Config 1,2	10: N _{RB,c} = 52			
			Config 3	20: N _{RB,c} = 51			
BWP configuration n	Initial DL BWP		Config 1, 2, 3, 4	DLBWP.0.1		NA	
	Initial UL BWP		Config 1, 2, 3, 4	ULBWP.0.1		NA	
	Dedicated DL BWP			DLBWP.1.1		NA	
	Dedicated UL BWP			ULBWP.1.1		NA	
TRS configuration			Config 1	TRS.1.1 FDD		NA	
			Config 2	TRS.1.1 TDD		NA	
			Config 3	TRS.1.2 TDD		NA	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1,2,3,4	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1,4	SR.1.1 FDD		NA	
			Config 2	SR.1.1 TDD		NA	
			Config 3	SR2.1 TDD		NA	
CORESET Reference Channel			Config 1,4	CR.1.1 FDD		NA	
			Config 2	CR.1.1 TDD		NA	
			Config 3	CR2.1 TDD		NA	
SSB parameters			Config 1,4	SSB.1 FR1		SSB.1 FR1	
			Config 2	SSB.1 FR1		SSB.1 FR1	
			Config 3	SSB.1 RedCap FR1		SSB.1 RedCap FR1	

SMTC configuration defined in A.3.11		Config 1,4	SMTC.2		SMTC.2	
		Config 2, 3	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	Config 1,2, 4	15			
		Config 3	30			
EPRE ratio of PSS to SSS		Config 1,2,3,4	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS (Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}	dBm/15 kHz	Config 1,2,3,4	-98		-98	
N_{oc} ^{Note2}	dBm/S CS	Config 1,2,4	-98		-98	
		Config 3	-95		-95	
SS-RSRP ^{Note 3}	dBm/S CS	Config 1,2,4	-94	-94	-Infinity	-91
		Config 3	-91	-91	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	Config 1,2,3,4,5,6	4	4	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	Config 1,2,3,4	4	4	-Infinity	7
I_o ^{Note3}	dBm/9.36MHz	Config 1,2,4	-64.59	-64.59	-70.05	-62.2
	dBm/18.36MHz	Config 3	-61.66	-61.66	-67.11	-59.32
Propagation Condition		Config 1,2,3	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						

Table A.16.6.2.12.1-4: TimeAlignmentTimer -Configuration SA inter-frequency event triggered reporting when DRX is used

Field	Value	Comment
TimeAlignmentTimer	ms500	As specified in clause 6.3.2 in TS 38.331 [2]

A.16.6.2.12.2 Test Requirements

In test config 1 and 4, UE is required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 1120 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test config 2 and 3, UE is not required to report SSB time index. The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.3 Inter-RAT Measurements

A.16.6.3.1 SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1 for 1 Rx UE

A.16.6.3.1.1 Test purpose and Environment

The purpose of this set of tests is to verify that the 1 Rx redcap UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1. This test shall partly verify the cell search and measurement requirements in Clauses 9.4A.2 and 9.4A.3.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

Supported test configurations are shown in table A.16.6.3.1.1-1. General test parameters are provided in Table A.16.6.3.1.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.16.6.3.1.1-3 and A.16.6.3.1.1-4, respectively.

Table A.16.6.3.1.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.6.3.1.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Value	Comment
-----------	------	-------	---------

NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		1	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.16.6.3.1.1-3 and A.16.6.3.1.1-4.	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 1
Gap Pattern Id		0	As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	5	
Note 1: Values are defined in Table A.16.6.3.1.1-3			

Table A.16.6.3.1.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in non-DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode			1, 3, 7, 8	FDD	
			2, 4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
BW _{channel}		MHz	1, 4, 7, 8	10: N _{RB,C} = 52 (FDD)	
			2, 5	10: N _{RB,C} = 52(TDD)	
			3, 6	20: N _{RB,C} = 51 (TDD)	
PDSCH reference measurement channel			1, 4, 7, 8	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4, 7, 8	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4, 7, 8	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.1.1	
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6, 7, 8	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6, 7, 8	SMTC.1 FR1	

SSB configuration		1, 2, 4, 5, 7, 8	SSB.1 FR1	
		3, 6	SSB.1 RedCap FR1	
CSI-RS for tracking		1, 4, 7, 8	TRS.1.1 FDD	
		2, 5	TRS.1.1 TDD	
		3, 6	TRS.1.2 TDD	
b2-Threshold1	dBm	1, 2, 4, 5, 7, 8	-96	
		3, 6	-93	
EPRE ratio of PSS to SSS	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}^{Note2}	dBm/15 KHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
N_{oc}^{Note2}	dBm/SCS	1, 2, 4, 5, 7, 8	-104	
		3, 6	-101	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	16	0
$\hat{E}_s/I_{ot}^{Note3}$	dB	1, 2, 3, 4, 5, 6	16	0
SS-RSRP ^{Note3}	dBm/SCS	1, 2, 4, 5, 7, 8	-88	-104
		3, 6	-85	-101
SSB_RP ^{Note3}	dBm/SCS	1, 2, 4, 5, 7, 8	-88	-104
		3, 6	-85	-101
I_o^{Note3}	dBm/9.36 MHz	1, 2, 4, 5, 7, 8	-59.94	-73.04
	dBm/18.36 MHz	3, 6	-57.01	-70.11
Propagation condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration		1, 2, 3, 4, 5, 6, 7, 8	1x1	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	$\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.16.6.3.1.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6, 8	6	

TDD uplink-downlink configuration ^{Note1}		4, 5, 6, 8	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}				
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	17
$\hat{E}_s/I_{ot}$ ^{Note5}	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	17
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-87
I ₀ ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-76.22+10log (N _{RB,c} /50)	-59.13+10log (N _{RB,c} /50)
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration		1, 2, 3, 4, 5, 6, 7, 8	1x1	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				

Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.3.1.2 Test Requirements

The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84 s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.3.2 SA NR - E-UTRAN event-triggered reporting in non-DRX in FR1 for 2 Rx UE

A.16.6.3.2.1 Test purpose and Environment

The purpose of this set of tests is to verify that the 2 Rx redcap UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1. This test shall partly verify the cell search and measurement requirements in Clauses 9.4A.2 and 9.4A.3.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

Supported test configurations are shown in table A.16.6.3.2.1-1. General test parameters are provided in Table A.16.6.3.2.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.16.6.3.2.1-3 and A.16.6.3.2.1-4, respectively.

Table A.16.6.3.2.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1 for 1 Rx UE

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.6.3.2.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		1	1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.16.6.3.2.1-3 and A.16.6.3.2.1-4.	
Active cell		Cell 1	Cell 1 is on RF channel number 1
Neighbour cell		Cell 2	Cell 2 is on RF channel number 1
Gap Pattern Id		0	As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	OFF
T1	s	5	
T2	s	5	
Note 1: Values are defined in Table A.16.6.3.2.1-3			

Table A.16.6.3.1.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in non-DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode			1, 3, 7, 8	FDD	
			2, 4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
BW _{channel}		MHz	1, 4, 7, 8	10: N _{RB,c} = 52 (FDD)	
			2, 5	10: N _{RB,c} = 52(TDD)	
			3, 6	20: N _{RB,c} = 51 (TDD)	
PDSCH reference measurement channel			1, 4, 7, 8	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4, 7, 8	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4, 7, 8	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.1.1	

	Initial UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.1.1	
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6, 7, 8	OP.1	
SMTc configuration			1, 2, 3, 4, 5, 6, 7, 8	SMTc.1 FR1	
SSB configuration			1, 2, 4, 5, 7, 8	SSB.1 FR1	
			3, 6	SSB.1 RedCap FR1	
CSI-RS for tracking			1, 4, 7, 8	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5, 7, 8	-96	
			3, 6	-93	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc} ^{Note2}		dBm/15 KHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
N_{oc} ^{Note2}		dBm/SCS	1, 2, 4, 5, 7, 8	-104	
			3, 6	-101	
$\hat{E}_s/N_{oc}$		dB	1, 2, 3, 4, 5, 6, 7, 8	116	70
$\hat{E}_s/I_{ot}$ ^{Note3}		dB	1, 2, 3, 4, 5, 6, 7, 8	116	70
SS-RSRP ^{Note3}		dBm/SCS	1, 2, 4, 5, 7, 8	-88	-104
			3, 6	-85	-101
SSB_RP ^{Note3}		dBm/SCS	1, 2, 4, 5, 7, 8	-88	-104
			3, 6	-85	-101
I_o ^{Note3}		dBm/9.36 MHz	1, 2, 4, 5, 7, 8	-59.94	-73.04
		dBm/18.36 MHz	3, 6	-57.01	-70.11
Propagation condition			1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix			1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Table A.16.6.3.2.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in non-DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6, 8	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6, 8	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	17
$\hat{E}_s/I_{ot}$ ^{Note5}	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	17

RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-87
Io ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-76.22+10log (N _{RB,c} /50)	-59.13+10log (N _{RB,c} /50)
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].			
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.			
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.			
Note 5:	Ê _s /I _{ot} , RSRP, SCH_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.16.6.3.2.2 Test Requirements

The UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2xTTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.3.3 SA NR - E-UTRAN event-triggered reporting in DRX in FR1 for 1 Rx UE

A.16.6.3.3.1 Test purpose and Environment

The purpose of this set of tests is to verify that the 1 Rx redcap UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1 when DRX is used. This test shall partly verify the cell search and measurement requirements in Clauses 9.4A.2 and 9.4A.3. There are two test cases. In test 1 the UE shall be configured with DRX cycle of 40 ms. In test 2 the UE shall be configured with DRX cycle of 640 ms.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2..

In each test the UE shall be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore the UE shall be allocated with PUSCH resource at every DRX cycle.

Supported test configurations are shown in table A.16.6.3.3.1-1. General test parameters are provided in Table A.16.6.3.3.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.16.6.3.3.1-3 and A.16.6.3.3.1-4, respectively.

Table A.16.6.3.3.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.6.3.3.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Value		Comment
		Test 1	Test 2	
NR RF Channel Number		1		1 NR carrier frequency is used in the test
LTE RF Channel Number		2		1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.16.6.3.3.1-3 and A.16.6.3.3.1-4.		
Active cell		Cell 1		Cell 1 is on RF channel number 1
Neighbour cell		Cell 2		Cell 2 is on RF channel number 2
Gap Pattern Id		0		As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP		Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP		Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95		E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0		
TimeToTrigger	s	0		
Filter coefficient		0		L3 filtering is not used
DRX		DRX.1	DRX.7	DRX cycle configurations DRX.1 and DRX.7 are defined in Table A.3.3.1-1 and Table A.3.3.7-1 respectively.
T1	s	5		
T2	s	5	15	
Note 1: Values are defined in Table A.16.6.3.3.1-3				

Table A.16.6.3.3.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 1	
			T1	T2

RF channel number			1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode			1, 3, 7, 8	FDD	
			2, 4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
BW _{channel}		MHz	1, 4, 7, 8	10: N _{RB,c} = 52 (FDD)	
			2, 5	10: N _{RB,c} = 52(TDD)	
			3, 6	20: N _{RB,c} = 51 (TDD)	
PDSCH reference measurement channel			1, 4, 7, 8	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4, 7, 8	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4, 7, 8	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.1.1	
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6, 7, 8	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6, 7, 8	SMTC.1 FR1	
SSB configuration			1, 2, 4, 5, 7, 8	SSB.1 FR1	
			3, 6	SSB.1 RedCap FR1	
CSI-RS for tracking			1, 4, 7, 8	TRS.1.1 FDD	
			2, 5	TRS.1.1 TDD	
			3, 6	TRS.1.2 TDD	
b2-Threshold1		dBm	1, 2, 4, 5, 7, 8	-96	
			3, 6	-93	
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N _{oc} ^{Note2}		dBm/15 KHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
N _{oc} ^{Note2}		dBm/SCS	1, 2, 4, 5, 7, 8	-104	
			3, 6	-101	
Ê _s /N _{oc}		dB	1, 2, 3, 4, 5, 6, 7, 8	16	0

$\hat{E}_s/I_{ot}^{Note3}$	dB	1, 2, 3, 4, 5, 6, 7, 8	16	0
SS-RSRP ^{Note3}	dBm/SCS	1, 2, 4, 5, 7, 8	-88	-104
		3, 6	-85	-101
SSB_RP ^{Note3}	dBm/SCS	1, 2, 4, 5, 7, 8	-88	-104
		3, 6	-85	-101
I_o^{Note3}	dBm/9.36 MHz	1, 2, 4, 5, 7, 8	-59.94	-73.04
	dBm/18.36 MHz	3, 6	-57.01	-70.11
Propagation condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration		1, 2, 3, 4, 5, 6, 7, 8	1x1	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Table A.16.6.3.3.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6, 8	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6, 8	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	

		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}				
Ê _s /N _{oc}	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	17
Ê _s /I _{ot} ^{Note5}	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	17
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-87
I _o ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-76.22+10log (N _{RB,c} /50)	-59.13+10log (N _{RB,c} /50)
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration		1, 2, 3, 4, 5, 6, 7, 8	1x1	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5: Ê _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.16.6.3.3.2 Test Requirements

In test 1, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

In test 2, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 12.8s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.3.4 SA NR - E-UTRAN event-triggered reporting in DRX in FR1 for 2 Rx UE

A.16.6.3.4.1 Test purpose and Environment

The purpose of this set of tests is to verify that the 2 Rx redcap UE makes correct event-triggered reporting of inter-RAT E-UTRAN measurements when operating in standalone (SA) operation with PCell in FR1 when DRX is used. This test shall partly verify the cell search and measurement requirements in Clauses 9.4A.2 and 9.4A.3. There are two test cases. In test 1 the UE shall be configured with DRX cycle of 40 ms. In test 2 the UE shall be configured with DRX cycle of 640 ms.

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an inter-RAT E-UTRAN inter-RAT neighbour cell. In the measurement control information from the PCell it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) is to be used. Each test consists of two consecutive time periods, with durations T1 and T2, respectively. Prior to the start of time duration T1, the UE shall be fully synchronized to Cell 1. During T1, the UE shall not have any information on Cell 2.

In each test the UE shall be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore the UE shall be allocated with PUSCH resource at every DRX cycle.

Supported test configurations are shown in table A.16.6.3.4.1-1. General test parameters are provided in Table A.16.6.3.4.1-2 below. Test parameters for Cell 1 and Cell 2, valid for both time duration T1 and T2, are provided in Tables A.16.6.3.4.1-3 and A.16.6.3.4.1-4, respectively.

Table A.16.6.3.4.1-1: Supported test configurations in SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.6.3.4.1-2: General test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Value		Comment
		Test 1	Test 2	
NR RF Channel Number		1		1 NR carrier frequency is used in the test
LTE RF Channel Number		1		1 LTE carrier frequency is used in the test
Channel Bandwidth	MHz	As specified in Tables A.16.6.3.4.1-3 and A.16.6.3.4.1-4.		
Active cell		Cell 1		Cell 1 is on RF channel number 1
Neighbour cell		Cell 2		Cell 2 is on RF channel number 2

Gap Pattern Id		0	As specified in Clause Table 9.1.2-1. Per-UE gap pattern.
NR measurement quantity		SS-RSRP	Measurement quantity for Cell 1
Inter-RAT E-UTRAN measurement quantity		RSRP	Measurement quantity for Cell 2
b2-Threshold1	dBm	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell1 for event B2
b2-Threshold2EUTRA	dBm	-95	E-UTRAN RSRP threshold for SS-RSRP measurement on cell1 for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		DRX.1 DRX.7	DRX cycle configurations DRX.1 and DRX.7 are defined in Table A.3.3.1-1 and Table A.3.3.7-1 respectively.
T1	s	5	
T2	s	5 15	
Note 1: Values are defined in Table A.16.6.3.4.1-3			

Table A.16.6.3.4.1-3: PCell specific test parameters for SA inter-RAT E-UTRA event triggered reporting in DRX with PCell in FR1

Parameter		Unit	Configuration	Cell 1	
				T1	T2
RF channel number			1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode			1, 3, 7, 8	FDD	
			2, 4, 5, 6	TDD	
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1	
	SCS=30 KHz		3, 6	TDDConf.2.1	
BW _{channel}		MHz	1, 4, 7, 8	10: N _{RB,c} = 52 (FDD)	
			2, 5	10: N _{RB,c} = 52 (TDD)	
			3, 6	20: N _{RB,c} = 51 (TDD)	
PDSCH reference measurement channel			1, 4, 7, 8	SR.1.1 FDD	
			2, 5	SR.1.1 TDD	
			3, 6	SR.2.1 TDD	
RMSI CORSET reference channel			1, 4, 7, 8	CR.1.1 FDD	
			2, 5	CR.1.1 TDD	
			3, 6	CR.2.1 TDD	
Dedicated CORSET reference channel			1, 4, 7, 8	CCR.1.1 FDD	
			2, 5	CCR.1.1 TDD	
			3, 6	CCR.2.1 TDD	
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1	
	Dedicated DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.1.1	
	Initial UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1	
	Dedicated UL BWP		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.1.1	
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6, 7, 8	OP.1	
SMTC configuration			1, 2, 3, 4, 5, 6, 7, 8	SMTC.1 FR1	
SSB configuration			1, 2, 4, 5, 7, 8	SSB.1 FR1	

		3, 6	SSB.1 RedCap FR1	
CSI-RS for tracking		1, 4, 7, 8	TRS.1.1 FDD	
		2, 5	TRS.1.1 TDD	
		3, 6	TRS.1.2 TDD	
b2-Threshold1	dBm	1, 2, 4, 5, 7, 8	-96	
		3, 6	-93	
EPRE ratio of PSS to SSS	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}^{Note2}	dBm/15 KHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
N_{oc}^{Note2}	dBm/SCS	1, 2, 4, 5, 7, 8	-104	
		3, 6	-101	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	16	0
$\hat{E}_s/I_{ot}^{Note3}$	dB	1, 2, 3, 4, 5, 6, 7, 8	16	0
SS-RSRP ^{Note3}	dBm/SCS	1, 2, 4, 5, 7, 8	-88	-104
		3, 6	-85	-101
SSB_RP ^{Note3}	dBm/SCS	1, 2, 4, 5, 7, 8	-88	-104
		3, 6	-85	-101
I_o^{Note3}	dBm/9.36 MHz	1, 2, 4, 5, 7, 8	-59.94	-73.04
	dBm/18.36 MHz	3, 6	-57.01	-70.11
Propagation condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	$\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.16.6.3.4.1-4: E-UTRAN neighbour cell specific test parameters for SA inter-RAT E-UTRAN event triggered reporting in DRX with PCell in FR1

Parameter	Unit	Configuration	Cell 2	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2	
Duplex mode		1, 2, 3, 7	FDD	

		4, 5, 6, 8	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6, 8	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6, 8	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	17
$\hat{E}_s/I_{ot}$ ^{Note5}	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	17
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	-87
I ₀ ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	$-76.22+10\log(N_{RB,c}/50)$	$-59.13+10\log(N_{RB,c}/50)$
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low	

Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.3.4.2 Test Requirements

In test 1, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 3.84s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

In test 2, the UE shall send one Event B2 triggered measurement report for Cell 2 to the PCell, with a measurement reporting delay less than 12.8s from the start of period T2. The measurement reporting delay is defined as the time from the beginning of time period T2 to the moment when the UE sends the measurement report on PUSCH.

The UE shall not send event-triggered measurement reports as long as the reporting criteria is not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.4 L1-RSRP measurement for beam reporting

A.16.6.4.1 SSB based L1-RSRP measurement when DRX is not used for 1 Rx UE

A.16.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.1, with the testing configurations for NR cells in Table A.16.6.4.1.1-1.

Table A.16.6.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.6.4.1.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.6.4.1.2-1 and Table A.16.6.4.1.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.16.6.4.1.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
	4		HD-FDD
TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		20: N _{RB,c} = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.2 RedCap FR1
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~4		SMTC.1 RedCap
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~4		Off
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	80
T1	1~4	s	5
T2	1~4	s	1
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			

EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.16.6.4.1.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} ^{Note2}	1~4	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1,2,4	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~4	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1,2,4	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1,2,4	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/18.36 MHz	-60.77	-60.77	-63.79	-59.02
$\hat{E}_s / N_{oc}$	1~4	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.16.6.4.1.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.4.2 SSB based L1-RSRP measurement when DRX is not used for 2 Rx UE**A.16.6.4.2.1 Test Purpose and Environment**

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.1, with the testing configurations for NR cells in Table A.16.6.4.2.1-1.

Table A.16.6.4.2.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
--------	-------------

1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.6.4.2.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.6.4.2.2-1 and Table A.16.6.4.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.16.6.4.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
	4		HD-FDD
TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		20: N _{RB,c} = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.2 RedCap FR1
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~4		SMTC.1 RedCap
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~4		Off

reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	80
T1	1~4	s	5
T2	1~4	s	1
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.16.6.4.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} ^{Note2}	1~4	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1,2,4	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s/I_{ot}$	1~4	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1,2	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1,2,4	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/18.36 MHz	-60.77	-60.77	-63.79	-59.02
$\hat{E}_s/N_{oc}$	1~4	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.16.6.4.2.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.4.3 SSB based L1-RSRP measurement when DRX is used for 1 Rx UE

A.16.6.4.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.1, with the testing configurations for NR cells in Table A.16.6.4.3.1-1.

Table A.16.6.4.3.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.6.4.3.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.6.4.3.2-1 and Table A.16.6.4.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.16.6.4.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1,4		FDD
	2		TDD
	3		TDD
	4		HD-FDD
TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		20: N _{RB,c} = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD

	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.2 RedCap FR1
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~4		SMTC.1 RedCap
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~4		DRX.3
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	80
T1	1~4	s	5
T2	1~4	s	1
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.16.6.4.3.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} ^{Note2}	1~4	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1,2,4	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s / I_{ot}$	1~4	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1,2,4	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1,2,4	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/18.36 MHz	-60.77	-60.77	-63.79	-59.02
$\hat{E}_s / N_{oc}$	1~4	dB	0	0	-Infinity	3

Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.4.3.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.4.4 SSB based L1-RSRP measurement when DRX is used for 2 Rx UE

A.16.6.4.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.1, with the testing configurations for NR cells in Table A.16.6.4.4.1-1.

Table A.16.6.4.4.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.6.4.4.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.6.4.4.2-1 and Table A.16.6.4.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.16.6.4.34.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
	4		HD-FDD

TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		20: N _{RB,c} = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.2 RedCap FR1
OCNG Patterns	1~4		OP.1
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1~4		SMTC.1 RedCap
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
DRX configuration	1~4		DRX.3
reportConfigType	1~4		periodic
reportQuantity	1~4		ssb-Index-RSRP
Number of reported RS	1~4		2
L1-RSRP reporting period	1~4	slot	80
T1	1~4	s	5
T2	1~4	s	1
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.16.6.4.34.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
N_{oc} ^{Note2}	1~4	dBm/15kHz	-94.65			
N_{oc} ^{Note2}	1,2,4	dBm/SSB SCS	-94.65			
	3		-91.65			
$\hat{E}_s/I_{ot}$	1~4	dB	0	0	-Infinity	3
SSB RSRP ^{Note3}	1,2,4	dBm/SSB SCS	-94.65	-94.65	-Infinity	-91.65
	3		-91.65	-91.65	-Infinity	-88.65
I_o ^{Note3}	1,2,4	dBm/9.36 MHz	-63.69	-63.69	-66.70	-61.93
	3	dBm/18.36 MHz	-60.77	-60.77	-63.79	-59.02
$\hat{E}_s/N_{oc}$	1~4	dB	0	0	-Infinity	3
Note 1: The resources for uplink transmission are assigned to the UE prior to the start of time period T2. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						

A.16.6.4.4.3 Test Requirements

The UE shall send L1-RSRP report every 80 slots. No later than 640ms plus 80 slots from the beginning of time period T2, UE shall send L1-RSRP report including results of both SSB0 and SSB1 while meeting the absolute accuracy requirement in clause 10.1.19.1.1 and relative accuracy requirement in clause 10.1.19.1.2. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.4.5 CSI-RS based L1-RSRP measurement when DRX is not used for 1 Rx UE

A.16.6.4.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.2, with the testing configurations for NR cells in Table A.16.6.4.5.1-1.

Table A.16.6.4.5.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.6.4.5.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.6.4.5.2-1 and Table A.16.6.4.5.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.16.6.4.5.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.16.6.4.5.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
	4		HD-FDD
TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		20: N _{RB,c} = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.2 Redcap FR1
CSI-RS configuration	1,4		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
OCNG Patterns	1~4		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~4		DLBWP.0.1
			ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1
			ULBWP.1.1
SMTC configuration	1,2,4		SMTC.1 Redcap
	3		SMTC.1 Redcap
DRX configuration	1~4		Off
reportConfigType	1~4		aperiodic
reportQuantity	1~4		cri-RSRP
Number of reported RS	1~4		2
qcl-Info	1~4		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~4	slots	8
T1	1~4	s	5

EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}	1~4		AWGN
Propagation condition			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.16.6.4.5.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} ^{Note1}	1~4	dBm/15kHz	-94.65	
N_{oc} ^{Note1}	1,2,4	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~4	dB	0	3
CSI-RS RSRP ^{Note2}	1,2,4	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
I_o ^{Note2}	1,2,4	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/18.36 MHz	-60.77	-59.02
$\hat{E}_s / N_{oc}$	1~4	dB	0	3
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.16.6.4.5.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.19.2.1 and relative accuracy requirement in clause 10.1.19.2.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.4.6 CSI-RS based L1-RSRP measurement when DRX is not used for 2 Rx UE

A.16.6.4.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.2, with the testing configurations for NR cells in Table A.16.6.4.6.1-1.

Table A.16.6.4.6.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.6.4.6.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.6.4.6.2-1 and Table A.16.6.4.6.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.16.6.4.6.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.16.6.4.6.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2		TDD
	3		TDD
	4		HD-FDD
TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		20: N _{RB,c} = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD

SSB configuration	1,4		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.2 Redcap FR1
CSI-RS configuration	1,4		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
OCNG Patterns	1~4		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1,2,4		SMTC.1 Redcap
	3		SMTC.1 Redcap
DRX configuration	1~4		Off
reportConfigType	1~4		aperiodic
reportQuantity	1~4		cri-RSRP
Number of reported RS	1~4		2
qcl-Info	1~4		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~4	slots	8
T1	1~4	s	5
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.16.6.4.6.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} ^{Note1}	1~4	dBm/15kHz	-94.65	
N_{oc} ^{Note1}	1,2,4	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~4	dB	0	3
CSI-RS RSRP ^{Note2}	1,2,4	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
I_o ^{Note2}	1,2,4	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/18.36 MHz	-60.77	-59.02
$\hat{E}_s / N_{oc}$	1~4	dB	0	3

- Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 2: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

A.16.6.4.6.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.19.2.1 and relative accuracy requirement in clause 10.1.19.2.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCCH.

A.16.6.4.7 CSI-RS based L1-RSRP measurement when DRX is used for 1 Rx UE

A.16.6.4.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.2, with the testing configurations for NR cells in Table A.16.6.4.7.1-1.

Table A.16.6.4.7.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.6.4.7.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.6.4.7.2-1 and Table A.16.6.4.7.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.16.6.4.7.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.16.6.4.7.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~4		freq1
Duplex mode	1		FDD
	2		TDD

	3		TDD
	4		HD-FDD
TDD Configuration	1		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		20: N _{RB,c} = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.2 Redcap FR1
CSI-RS configuration	1,4		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
OCNG Patterns	1~4		OP.1
TRS Configuration	1,4		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1,2,4		SMTC.1 Redcap
	3		SMTC.1 Redcap
DRX configuration	1~4		DRX.3
reportConfigType	1~4		aperiodic
reportQuantity	1~4		cri-RSRP
Number of reported RS	1~4		2
qcl-Info	1~4		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1~4	slots	8
T1	1~4	s	5
EPRE ratio of PSS to SSS	1~4	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.16.6.4.7.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} ^{Note1}	1~4	dBm/15kHz	-94.65	
N_{oc} ^{Note1}	1,2,4	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s / I_{ot}$	1~4	dB	0	3
CSI-RS RSRP ^{Note2}	1,2,4	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
I_o ^{Note2}	1,2,4	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/18.36 MHz	-60.77	-59.02
$\hat{E}_s / N_{oc}$	1~4	dB	0	3
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.16.6.4.7.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.19.2.1 and relative accuracy requirement in clause 10.1.19.2.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.4.8 CSI-RS based L1-RSRP measurement when DRX is used for 2 Rx UE

A.16.6.4.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.2, with the testing configurations for NR cells in Table A.16.6.4.8.1-1.

Table A.16.6.4.8.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.6.4.8.2 Test parameters

There is one cells in the test, the FR1 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.6.4.8.2-1 and Table A.16.6.4.8.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 80ms from the beginning of the test, the DCI trigger comes in slot n (0 for Config 1,2 and 8 for Config 3) of a frame and UE provides the report back based on the reporting configuration as defined in Table A.16.6.4.8.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.16.6.4.8.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN Duplex mode	1~4		freq1
	1		FDD
	2		TDD
	3		TDD
	4		HD-FDD
TDD Configuration	1,4		N/A
	2		TDDConf.1.1
	3		TDDConf.2.1
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52
	2		10: N _{RB,c} = 52
	3		20: N _{RB,c} = 51
PDSCH Reference measurement channel	1,4		SR.1.1 FDD
	2		SR.1.1 TDD
	3		SR.2.1 TDD
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD
	2		CR.1.1 TDD
	3		CR.2.1 TDD
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD
	2		CCR.1.1 TDD
	3		CCR.2.1 TDD
SSB configuration	1,4		SSB.3 FR1
	2		SSB.3 FR1
	3		SSB.2 Redcap FR1
CSI-RS configuration	1,4		CSI-RS 1.3 FDD
	2		CSI-RS 1.3 TDD
	3		CSI-RS 2.3 TDD
OCNG Patterns	1~4		OP.1
TRS Configuration	1		TRS.1.1 FDD
	2		TRS.1.1 TDD
	3		TRS.1.2 TDD
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1,2,4		SMTC.1 Redcap
	3		SMTC.1 Redcap
DRX configuration	1~4		DRX.3
reportConfigType	1~4		aperiodic
reportQuantity	1~4		cri-RSRP
Number of reported RS	1~4		2
qcl-Info	1~4		SSB#0 for resource#0
			SSB#1 for resource#1
reportSlotOffsetList	1~4	slots	8
T1	1~4	s	5
EPRE ratio of PSS to SSS	1~4	dB	0

EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~4		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.16.6.4.8.2-2: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
N_{oc} ^{Note1}	1~4	dBm/15kHz	-94.65	
N_{oc} ^{Note1}	1,2,4	dBm/SSB SCS	-94.65	
	3		-91.65	
$\hat{E}_s/I_{ot}$	1~4	dB	0	3
CSI-RS RSRP ^{Note2}	1,2,4	dBm/SSB SCS	-94.65	-91.65
	3		-91.65	-88.65
I_o ^{Note2}	1,2,4	dBm/9.36 MHz	-63.69	-61.93
	3	dBm/18.36 MHz	-60.77	-59.02
$\hat{E}_s/N_{oc}$	1~4	dB	0	3
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

A.16.6.4.8.3 Test Requirements

After 80ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the absolute accuracy requirement in clause 10.1.19.2.1 and relative accuracy requirement in clause 10.1.19.2.2.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.16.6.5 NR measurements with autonomous gaps

A.16.6.5.1 SA intra-frequency CGI identification of NR neighbor cell in FR1 for 1 Rx UE

A.16.6.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of intra-frequency CGI identification of an NR neighbour cell in FR1 with autonomous gaps. This test shall partly verify the measurement requirements in Clause 9.11A.

A.16.6.5.1.2 Test Parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the FR1 PCell and Cell 2 is an FR1 neighbour cell on the same frequency as the PCell. The test parameters for PCell and neighbour cell are given in Table A.16.6.5.1.2-1, A.16.6.5.1.2-2 and A.16.6.5.1.2-3 below. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable. A measurement object is configured for the frequency of the PCell and it is indicated to the UE that event-triggered reporting with Event A3 is used. The UE is expected to detect and send a measurement report with Event A3.

A new RRC message triggering CGI identification shall be sent to the UE during period T2, after the UE has reported Event A3. The RRC message shall create a measurement report configuration with purpose *reportCGI* and *useAutonomousGaps* set to *setup*. The start of T3 is the instant when the last TTI containing the RRC message implying CGI identification is sent to the UE.

The test equipment verifies that potential interruption is carried out correctly by monitoring ACK/NACK sent in PCell during T3 until a measurement report with CGI is sent.

Table A.16.6.5.1.2-1: Supported test configurations

Configuration	Description
1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.5.1.2-2: General test parameters for SA intra-frequency CGI identification of NR neighbor cell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4	Cell 1	
Neighbour cell		1, 2, 3, 4	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2	
SSB configuration		1, 4	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTC configuration		1, 4	SMTC.2	
		2	SMTC.1	
		3	SMTC.1	
A3-Offset	dB	1, 2, 3, 4	-4.5	
CP length		1, 2, 3, 4	Normal	
Hysteresis	dB	1, 2, 3, 4	0	
Time To Trigger	s	1, 2, 3, 4	0	
Filter coefficient		1, 2, 3, 4	0	L3 filtering is not used

DRX		1, 2, 3, 4		OFF
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	
T3	s	1, 2, 3, 4	5	

Table A.16.6.5.1.2-3: NR Cell specific test parameters for SA intra-frequency CGI identification of NR neighbor cell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS Configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	
		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	-64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	-64.60	-62.25
	dBm/18.36 MHz	3	-61.67	-59.32	-61.67	-59.32

Propagation Condition		1, 2, 3, 4	AWGN
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		

A.16.6.5.1.3 Test Requirements

The UE shall send a measurement report containing the CGI of cell 2 within 375 ms from the start of time period T3.

Test requirement = RRC Procedure delay + $T_{\text{identify_CGI_redcap}}$ + reporting delay

- = 10 + 360 + 2ms from the start of T3
- = 372 ms, allow 375 ms

The UE shall be scheduled continuously throughout the test. From the start of T3 until 372 ms, the interruption on PCell shall not be more than the values specified for SA in clause 9.11A.4.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.6.5.2 SA intra-frequency CGI identification of NR neighbor cell in FR1 for 2 Rx UE

A.16.6.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of intra-frequency CGI identification of an NR neighbour cell in FR1 with autonomous gaps. This test shall partly verify the measurement requirements in Clause 9.11A.

A.16.6.5.2.2 Test Parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the FR1 Pcell and Cell 2 is an FR1 neighbour cell on the same frequency as the Pcell. The test parameters for Pcell and neighbour cell are given in Table A.16.6.5.2.2-1, A.16.6.5.2.2-2 and A.16.6.5.2.2-3 below. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable. A measurement object is configured for the frequency of the Pcell and it is indicated to the UE that event-triggered reporting with Event A3 is used. The UE is expected to detect and send a measurement report with Event A3.

A new RRC message triggering CGI identification shall be sent to the UE during period T2, after the UE has reported Event A3. The RRC message shall create a measurement report configuration with purpose *reportCGI* and *useAutonomousGaps* set to *setup*. The start of T3 is the instant when the last TTI containing the RRC message implying CGI identification is sent to the UE.

The test equipment verifies that potential interruption is carried out correctly by monitoring ACK/NACK sent in Pcell during T3 until a measurement report with CGI is sent.

Table A.16.6.5.2.2-1: Supported test configurations

Configuration	Description
---------------	-------------

1	15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.16.6.5.2.2-2: General test parameters for SA intra-frequency CGI identification of NR neighbor cell in FR1

Parameter	Unit	Test configuration	Value	Comment
Active cell		1, 2, 3, 4	Cell 1	
Neighbour cell		1, 2, 3, 4	Cell 2	Cell to be identified.
RF Channel Number		1, 2, 3, 4	1: Cell 1 and Cell 2	
SSB configuration		1, 4	SSB.1 FR1	
		2	SSB.1 FR1	
		3	SSB.1 RedCap FR1	
SMTTC configuration		1, 4	SMTTC.2	
		2	SMTTC.1	
		3	SMTTC.1	
A3-Offset	dB	1, 2, 3, 4	-4.5	
CP length		1, 2, 3, 4	Normal	
Hysteresis	dB	1, 2, 3, 4	0	
Time To Trigger	s	1, 2, 3, 4	0	
Filter coefficient		1, 2, 3, 4	0	L3 filtering is not used
DRX		1, 2, 3, 4		OFF
Time offset between serving and neighbour cells		1, 4	3 ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3 μ s	Synchronous cells
		3	3 μ s	Synchronous cells
T1	s	1, 2, 3, 4	5	
T2	s	1, 2, 3, 4	5	
T3	s	1, 2, 3, 4	5	

Table A.16.6.5.2.2-3: NR Cell specific test parameters for SA intra-frequency CGI identification of NR neighbor cell in FR1

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 4	N/A		N/A	
		2	TDDConf.1.1		TDDConf.1.1	
		3	TDDConf.2.1		TDDConf.2.1	
PDSCH RMC configuration		1, 4	SR.1.1 FDD		N/A	
		2	SR.1.1 TDD			
		3	SR.2.1 TDD			
RMSI CORESET RMC configuration		1, 4	CR.1.1 FDD		CR.1.1 FDD	
		2	CR.1.1 TDD		CR.1.1 TDD	
		3	CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET RMC configuration		1, 4	CCR.1.1 FDD		CCR.1.1 FDD	
		2	CCR.1.1 TDD		CCR.1.1 TDD	
		3	CCR.2.1 TDD		CCR.2.1 TDD	
OCNG Patterns		1, 2, 3, 4	OP.1		OP.1	
TRS Configuration		1, 4	TRS.1.1 FDD		N/A	
		2	TRS.1.1 TDD		N/A	

		3	TRS.1.2 TDD		N/A	
Initial BWP configuration		1, 2, 3, 4	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2, 3, 4	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2, 3, 4	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2, 3, 4	SSB		SSB	
N_{oc} Note 2	dBm/SCS	1, 4	-98			
		2	-98			
		3	-95			
N_{oc} Note 2	dBm/15 kHz	1, 4	-98			
		2				
		3				
$\hat{E}_s/I_{ot}$	dB	1, 4	4	-1.46	-Infinity	-1.46
		2				
		3				
$\hat{E}_s/N_{oc}$	dB	1, 4	4	4	-Infinity	4
		2				
		3				
SS-RSRP Note 3	dBm/SCS kHz	1, 4	-94	-94	-Infinity	-94
		2	-94	-94	-Infinity	-94
		3	-91	-91	-Infinity	-91
Io	dBm/9.36 MHz	1, 4	-64.60	-62.25	--64.60	-62.25
	dBm/9.36 MHz	2	-64.60	-62.25	--64.60	-62.25
	dBm/18.36 MHz	3	-61.67	-59.32	-61.67	-59.32
Propagation Condition		1, 2, 3, 4	AWGN			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.16.6.5.2.3 Test Requirements

The UE shall send a measurement report containing the CGI of cell 2 within 255 ms from the start of time period T3.

Test requirement = RRC Procedure delay + $T_{\text{identify_CGI}}$ + reporting delay

- = 10 + 240 + 2ms from the start of T3
- = 252 ms, allow 255 ms

The UE shall be scheduled continuously throughout the test. From the start of T3 until 252 ms, the interruption on PCell shall not be more than the values specified for SA in clause 9.11A.4.

The rate of correct events observed during repeated tests shall be at least 90%.

A.16.6.5.3 Identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA for 1 Rx UE

A.16.6.5.3.1 Test Purpose and Environment

This test is to verify the requirement for identification of a new CGI of E-UTRA cell with autonomous gaps in NR SA in clause 9.4A.4.

The test scenario comprises of one NR carrier and an E-UTRA carrier and two cells as given in tables A.16.6.5.3.1-1, A.16.6.5.3.1-2, A.16.6.5.3.1-3 and A.16.6.5.3.1-4. PDCCHs indicating new transmissions shall be sent continuously to ensure that the UE would have ACK/NACK sending during identifying a new CGI of E-UTRAN cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE is expected to detect and send a measurement report.

A RRC message implying SI reading shall be sent to the UE during period T2, after the UE has reported Event B2. The RRC message shall create a measurement report configuration with purpose *reportCGI* and *useAutonomousGaps* set to *setup*. The start of T3 is the instant when the last TTI containing the RRC message implying SI reading is sent to the UE.

Table A.16.6.5.3.1-1: Supported test configurations of inter-RAT E-UTRAN cell using autonomous gap in SA

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.6.5.3.1-2: General test parameters for identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 LTE carrier frequency is used in the test
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
LTE Channel Bandwidth	MHz	10	
LTE PDSCH/PCFICH/PDCCH/PHICH parameters			As specified in clause A.3.7.2.1
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
<i>useAutonomousGaps</i>		setup	As specified in clause 5.5.3.1 in TS 38.331.
Time offset between cells	ms	3	Asynchronous cells
T1	s	5	
T2	s	≤10	
T3	s	5	

Table A.16.6.5.3.1-3: PCell specific test parameters for identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6	1		
Duplex mode			1, 4	FDD		
			2, 3,5, 6	TDD		
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1		
	SCS=30 KHz		3, 6	TDDConf.2.1		
BW _{channel}		MHz	1, 4	10: N _{RB,c} = 52 (FDD)		
			2, 5	10: N _{RB,c} = 52 (TDD)		
			3, 6	20: N _{RB,c} = 51 (TDD)		
PDSCH reference measurement channel			1, 4	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1		
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1		
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1		
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1		
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6	OP.1		
SMTc configuration			1, 2, 3, 4, 5, 6	SMTc.1		
SSB configuration			1, 2, 4, 5	SSB.1 FR1		
			3, 6	SSB.1 RedCap FR1		
b2-Threshold1		dBm/SCS	1, 2, 4, 5	-98		
			3, 6	-95		
b2-Threshold2EUTRA		dBm/15kHz	1, 2, 3, 4, 5, 6	-109		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS						
EPRE ratio of OCNG to OCNG DMRS						
N _{oc} ^{Note2}		dBm/15 KHz	1, 2, 3, 4, 5, 6	-106		
N _{oc} ^{Note2}		dBm/SCS	1, 2, 4, 5	-106		
			3, 6	-103		
Ê _s /N _{oc}		dB	1, 2, 3, 4, 5, 6	18	-2	
Ê _s /I _{ot} ^{Note3}		dB	1, 2, 3, 4, 5, 6	18	-2	
SS-RSRP ^{Note3}		dBm/SCS	1, 2, 4, 5	-88	-108	
			3, 6	-85	-105	
SSB_RP ^{Note3}		dBm/SCS	1, 2, 4, 5	-88	-108	
			3, 6	-85	-105	
I _o ^{Note3}		dBm/9.36 MHz	1, 2, 4, 5	-59.98	-75.92	
		dBm/18.36 MHz	3, 6	-57.05	-72.99	
Propagation condition			1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration			1, 2, 3, 4, 5, 6	1x1		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						

- Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.6.5.3.1-4: Cell specific test parameters for inter-RAT E-UTRAN cell for identification of a new CGI of E-UTRA cell using autonomous gaps

Parameter	Unit	Configuration	Cell 2			
			T1	T2	T3	
RF channel number		1, 2, 3, 4, 5, 6	2			
Duplex mode		1, 2, 3	FDD			
		4, 5, 6	TDD			
TDD special subframe configuration ^{Note1}		4, 5, 6	6			
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1			
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	10 MHz: N _{RB,C} = 50			
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	10 MHz: R.3 FDD			
		4, 5, 6	10 MHz: R.0 TDD			
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	10 MHz: R.6 FDD			
		4, 5, 6	10 MHz: R.6 TDD			
OCNG Patterns ^{Note2}		1, 2, 3	10 MHz: OP.10 FDD			
		4, 5, 6	10 MHz: OP.1 TDD			
PBCH_RA	dB	1, 2, 3, 4, 5, 6	0			
PBCH_RB						
PSS_RA						
SSS_RA						
PCFICH_RB						
PHICH_RA						
PHICH_RB						
PDCCH_RA						
PDCCH_RB						
PDSCH_RA						
PDSCH_RB						
OCNG_RA ^{Note3}						
OCNG_RB ^{Note3}						
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6	-106			
Ê _s /N _{oc}	dB	1, 2, 3, 4, 5, 6	-Infinity	7	7	
Ê _s /I _{ot} ^{Note5}	dB	1, 2, 3, 4, 5, 6	-Infinity	7	7	
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-99	-99	
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-99	-99	
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN			
Antenna Configuration		1, 2, 3, 4, 5, 6	1x1			
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].					
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.					
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.					
Note 5:	Ê _s /I _{ot} , RSRP, and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.16.6.5.3.2 Test Requirements

The UE shall transmit a measurement report containing the cell global identifier of cell 2 within 240 milliseconds from the start of T3.

$$\begin{aligned}\text{Test requirement} &= \text{RRC Procedure delay with additional margin} + T_{\text{identify_CGI_LC-UE}} + \text{TTI insertion uncertainty} \\ &= 15 + 30 + 190 + 2\text{ms from the start of T3} \\ &= 237 \text{ ms, allow 240 ms.}\end{aligned}$$

- The UE shall be scheduled continuously throughout the test, and from the start of T3 until 240 ms at least the number of ACK/NACK specified in NOTE 2 shall be detected as being transmitted by the UE.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE 1: The actual overall delays measured in the test may be up to $2 \times TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 2: The overall ACK/NACK number is caused by two parts. Firstly, at least X ACK/NACK shall be sent during identifying the cell global identifier of cell 2, where X is defined in Table 9.4A.4.3-1. Secondly, given that continuous DL data allocation, additional 43, 14 and 34 ACK/NACK shall be sent for FDD 15 kHz, TDD 15 kHz and TDD 30 kHz, respectively, from the start of T3 until 240 ms excludes 190 ms for identifying the cell global identifier of cell 2.

A.16.6.5.4 Identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA for 2 Rx UE

A.16.6.5.4.1 Test Purpose and Environment

This test is to verify the requirement for identification of a new CGI of E-UTRA cell with autonomous gaps in NR SA in clause 9.4A.4.

The test scenario comprises of one NR carrier and an E-UTRA carrier and two cells as given in tables A.16.6.5.4.1-1, A.16.6.5.4.1-2, A.16.6.5.4.1-3 and A.16.6.5.4.1-4. PDCCHs indicating new transmissions shall be sent continuously to ensure that the UE would have ACK/NACK sending during identifying a new CGI of E-UTRAN cell. The test consists of three successive time periods, with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE is expected to detect and send a measurement report.

A RRC message implying SI reading shall be sent to the UE during period T2, after the UE has reported Event B2. The RRC message shall create a measurement report configuration with purpose *reportCGI* and *useAutonomousGaps* set to *setup*. The start of T3 is the instant when the last TTI containing the RRC message implying SI reading is sent to the UE.

Table A.16.6.5.4.1-1: Supported test configurations of inter-RAT E-UTRAN cell using autonomous gap in SA

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD

Note:	The UE is only required to be tested in one of the supported test configurations
-------	--

Table A.16.6.5.4.1-2: General test parameters for identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 LTE carrier frequency is used in the test
Active cell		Cell 1	
Neighbour cell		Cell 2	Cell to be identified.
LTE Channel Bandwidth	MHz	10	
LTE PDSCH/PCFICH/PDCCH/PHICH parameters			As specified in clause A.3.7.2.1
CP length		Normal	
Hysteresis	dB	0	
Time To Trigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	
useAutonomousGaps		setup	As specified in clause 5.5.3.1 in TS 38.331.
Time offset between cells	ms	3	Asynchronous cells
T1	s	5	
T2	s	≤10	
T3	s	5	

Table A.16.6.5.4.1-3: PCell specific test parameters for identification of a new CGI of inter-RAT E-UTRA cell using autonomous gaps in NR

Parameter		Unit	Configuration	Cell 1		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6	1		
Duplex mode			1, 4	FDD		
			2,3, 5	TDD		
TDD Configuration	SCS=15 KHz		2, 5	TDDConf.1.1		
	SCS=30 KHz		3, 6	TDDConf.2.1		
BW _{channel}		MHz	1, 4	10: N _{RB,c} = 52 (FDD)		
			2, 5	10: N _{RB,c} = 52 (TDD)		
			3, 6	20: N _{RB,c} = 51 (TDD)		
PDSCH reference measurement channel			1, 4	SR.1.1 FDD		
			2, 5	SR.1.1 TDD		
			3, 6	SR.2.1 TDD		
CORSET reference channel			1, 4	CR.1.1 FDD		
			2, 5	CR.1.1 TDD		
			3, 6	CR.2.1 TDD		
BWP configurations	Initial DL BWP		1, 2, 3, 4, 5, 6	DLBWP.0.1		
	Dedicated DL BWP		1, 2, 3, 4, 5, 6	DLBWP.1.1		
	Initial UL BWP		1, 2, 3, 4, 5, 6	ULBWP.0.1		
	Dedicated UL BWP		1, 2, 3, 4, 5, 6	ULBWP.1.1		
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6	OP.1		
SMTC configuration			1, 2, 3, 4, 5, 6	SMTC.1		
SSB configuration			1, 2, 4, 5	SSB.1 FR1		
			3, 6	SSB.1 RedCap FR1		
b2-Threshold1		dBm/SCS	1, 2, 4, 5	-98		
			3, 6	-95		
b2-Threshold2EUTRA		dBm/15kHz	1, 2, 3, 4, 5, 6	-109		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6	0		

EPRE ratio of PBCH_DMRS to SSS				
EPRE ratio of PBCH to PBCH_DMRS				
EPRE ratio of PDCCH_DMRS to SSS				
EPRE ratio of PDCCH to PDCCH_DMRS				
EPRE ratio of PDSCH_DMRS to SSS				
EPRE ratio of PDSCH to PDSCH_DMRS				
EPRE ratio of OCNG DMRS to SSS				
EPRE ratio of OCNG to OCNG DMRS				
N_{oc}^{Note2}	dBm/15 KHz	1, 2, 3, 4, 5, 6	-106	
N_{oc}^{Note2}	dBm/SCS	1, 2, 4, 5	-106	
		3, 6	-103	
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6	18	-2
$\hat{E}_s/I_{ot}^{Note3}$	dB	1, 2, 3, 4, 5, 6	18	-2
SS-RSRP ^{Note3}	dBm/SCS	1, 2, 4, 5	-88	-108
		3, 6	-85	-105
SSB_RP ^{Note3}	dBm/SCS	1, 2, 4, 5	-88	-108
		3, 6	-85	-105
I_o^{Note3}	dBm/9.36 MHz	1, 2, 4, 5	-59.98	-75.92
	dBm/18.36 MHz	3, 6	-57.05	-72.99
Propagation condition		1, 2, 3, 4, 5, 6	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				

Table A.16.6.5.4.1-4: Cell specific test parameters for inter-RAT E-UTRAN cell for identification of a new CGI of E-UTRA cell using autonomous gaps

Parameter	Unit	Configuration	Cell 2		
			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6	2		
Duplex mode		1, 2, 3	FDD		
		4, 5, 6	TDD		
TDD special subframe configuration ^{Note1}		4, 5, 6	6		
TDD uplink-downlink configuration ^{Note1}		4, 5, 6	1		
BW _{channel}	MHz	1, 2, 3, 4, 5, 6	10 MHz: $N_{RB,c} = 50$		
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	10 MHz: R.3 FDD		
		4, 5, 6	10 MHz: R.0 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3	10 MHz: R.6 FDD		
		4, 5, 6	10 MHz: R.6 TDD		
OCNG Patterns ^{Note2}		1, 2, 3	10 MHz: OP.10 FDD		
		4, 5, 6	10 MHz: OP.1 TDD		

PBCH_RA	dB	1, 2, 3, 4, 5, 6	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note3}					
OCNG_RB ^{Note3}					
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6	-106		
Ê _s /N _{oc}	dB	1, 2, 3, 4, 5, 6	-Infinity	7	7
Ê _s /I _{ot} ^{Note5}	dB	1, 2, 3, 4, 5, 6	-Infinity	7	7
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-99	-99
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6	-Infinity	-99	-99
Propagation Condition		1, 2, 3, 4, 5, 6	AWGN		
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6	1x2 Low		
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].					
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.					
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.					
Note 5: Ê _s /I _{ot} , RSRP, and SCH_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.16.6.5.4.2 Test Requirements

The UE shall transmit a measurement report containing the cell global identifier of cell 2 within 200 milliseconds from the start of T3.

Test requirement = RRC Procedure delay with additional margin + T_{identify_CGIE-UTRAN} + TTI insertion uncertainty

$$= 15 + 30 + 150 + 2\text{ms from the start of T3}$$

$$= 197 \text{ ms, allow 200 ms.}$$

- The UE shall be scheduled continuously throughout the test, and from the start of T3 until 200 ms at least the number of ACK/NACK specified in NOTE 2 shall be detected as being transmitted by the UE.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE 1: The actual overall delays measured in the test may be up to 2xTTI_{DCCH} higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

NOTE 2: The overall ACK/NACK number is caused by two parts. Firstly, at least X ACK/NACK shall be sent during identifying the cell global identifier of cell 2, where X is defined in Table 9.4A.4.3-1. Secondly, given that continuous DL data allocation, additional 43, 14 and 34 ACK/NACK shall be sent for FDD 15 kHz, TDD 15 kHz and TDD 30 kHz, respectively, from the start of T3 until 200 ms excludes 150 ms for identifying the cell global identifier of cell 2.

A.16.7 Measurement Performance requirements for RedCap

A.16.7.1 SS-RSRP

A.16.7.1.1 SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE

A.16.7.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1A.2.1 and 10.1A.2.2 for intra-frequency measurements for 1RX RedCap UE.

A.16.7.1.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.16.7.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.16.7.1.1.2-2. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell.

Table A.16.7.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.16.7.1.1.2-2: SS-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1, 4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1, 4	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		20: N _{RB,c} = 51					
BWP BW	Config 1, 4		10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		20: N _{RB,c} = 51					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1, 4		TRS.1. 1 FDD	NA	TRS.1 .1 FDD	NA	TRS.1. 1 FDD	NA
	Config 2		TRS.1. 1 TDD	NA	TRS.1 .1 TDD	NA	TRS.1. 1 TDD	NA

	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Control channel RMC	Config 1, 4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
SSB configuration	Config 1, 4		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.1 RedCap FR1	SSB.1 RedCap FR1	SSB.1 RedCap FR1	SSB.1 RedCap FR1	SSB.1 RedCap FR1	SSB.1 RedCap FR1
Time offset with Cell 1	Config 1, 4	ms	-	3	-	3	-	3
	Config 2,3	μs	-	3	-	3	-	3
SMTC configuration	Config 1, 4		SMTC.2					
	Config 2,3		SMTC.1					
OCNG Patterns			OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} ^{Note2}	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 6}	dBm/15KHz	-106	-88		-114	
		NR_FDD_FR1_B					-113.5	
		NR_TDD_FR1_C					-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D					-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E					-112	
		NR_FDD_FR1_F					-111.5	
		NR_FDD_FR1_G					-111	
		NR_FDD_FR1_H					-110.5	

	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	Not applicable ^{Note 5}		-94		-114		
		NR_FDD_FR1_B								-113.5
		NR_TDD_FR1_C								-113
		NR_FDD_FR1_D, NR_TDD_FR1_D								-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E								-112
		NR_FDD_FR1_F								-111.5
		NR_FDD_FR1_G								-111
		NR_FDD_FR1_H								-110.5
		N_{oc} ^{Note2}								Config 1,2,4
Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable ^{Note 5}		-91		-111			
	NR_FDD_FR1_B						-110.5			
	NR_TDD_FR1_C						-110			
	NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5			
	NR_FDD_FR1_E, NR_TDD_FR1_E						-109			
	NR_FDD_FR1_F						-108.5			
	NR_FDD_FR1_G						-108			
	NR_FDD_FR1_H						-107.5			
	$\hat{E}_s/I_{ot}$						dB	2.46	-5.97	2.46
$\hat{E}_s/N_{oc}$			dB	6	1	6	1	3	0	
SS- RSRP ^{Not e3}	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-100	-105	-82	-87	-	-	
		NR_FDD_FR1_B						111.00	114.00	
		NR_TDD_FR1_C						-	-	
		NR_FDD_FR1_D, NR_TDD_FR1_D						110.50	113.50	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-	-	
		NR_FDD_FR1_F						110.00	113.00	
		NR_FDD_FR1_G						-	-	
		NR_FDD_FR1_H						109.50	112.50	
		NR_FDD_FR1_H						-	-	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applica ble ^{Note 5}	Not applic able ^{Not e 5}	-85	-90	-	-	
		NR_FDD_FR1_B						108.00	111.00	
		NR_TDD_FR1_C						-	-	
		NR_FDD_FR1_D, NR_TDD_FR1_D						107.50	110.50	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-	-	
		NR_TDD_FR1_C						107.00	110.00	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-	-	
		NR_FDD_FR1_E, NR_TDD_FR1_E						106.50	109.50	
		NR_TDD_FR1_E						-	-	
		NR_TDD_FR1_E						106.00	109.00	

		NR_FDD_FR1_F					-	-
		NR_FDD_FR1_G					105.50	108.50
							-	-
		NR_FDD_FR1_H					105.00	108.00
							-	-
							104.50	107.50
Io ^{Note3}	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-70.09	-52.09	-80.03		
		NR_FDD_FR1_B				-79.53		
		NR_TDD_FR1_C				-79.03		
		NR_FDD_FR1_D, NR_TDD_FR1_D				-78.53		
		NR_FDD_FR1_E, NR_TDD_FR1_E				-78.03		
		NR_FDD_FR1_F				-77.53		
		NR_FDD_FR1_G				-77.03		
		NR_FDD_FR1_H				-76.53		
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 38.16MHz	Not applicable ^{Note 5}	-55.18	-77.12		
		NR_FDD_FR1_B				-76.62		
		NR_TDD_FR1_C				-76.12		
		NR_FDD_FR1_D, NR_TDD_FR1_D				-75.62		
		NR_FDD_FR1_E, NR_TDD_FR1_E				-75.12		
		NR_FDD_FR1_F				-74.62		
		NR_FDD_FR1_G				74.12		
		NR_FDD_FR1_H				73.62		
Propagation condition			-	AWGN				
Antenna configuration				1x1				
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.								
Note 5: Subtest 1 is not used when testing with 30kHz SSB SCS.								
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification								

A.16.7.1.1.3 Test Requirements

The SS-RSRP measurement accuracy for cell 1 and cell 2 shall fulfil absolute requirement in clause 10.1A.2.1 and relative requirement in clause 10.1A.2.2 for 1RX RedCap UE.

A.16.7.1.2 SA: intra-frequency case measurement accuracy with FR1 serving cell and FR1 target cell for 2Rx UE

A.16.7.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1A.2.1 and 10.1A.2.2 for intra-frequency measurements for 2RX RedCap UE.

A.16.7.1.2.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in table A.16.7.1.2.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in A.16.7.1.2.2-2. In all test cases, Cell 1 is the PCell, and Cell 2 is the target cell.

Table A.16.7.1.2.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.16.7.1.2.2-2: SS-RSRP Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Cell ID			489	0	489	0	489	0
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		20: N _{RB,c} = 51					
BWP BW	Config 1,4		10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		20: N _{RB,c} = 51					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
TRS configuration	Config 1,4		TRS.1.1 FDD	NA	TRS.1.1 FDD	NA	TRS.1.1 FDD	NA
	Config 2		TRS.1.1 TDD	NA	TRS.1.1 TDD	NA	TRS.1.1 TDD	NA
	Config 3		TRS.1.2 TDD	NA	TRS.1.2 TDD	NA	TRS.1.2 TDD	NA
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD			
	Config 3		SR2.1 TDD		SR2.1 TDD			
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	-
	Config 2		CR.1.1 TDD		CR.1.1 TDD			
	Config 3		CR2.1 TDD		CR2.1 TDD			

Control channel RMC	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
SSB configuration	Config 1,4		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 2		SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1	SSB.1 FR1
	Config 3		SSB.1 RedCap FR1	SSB.1 RedCap FR1	SSB.1 RedCap FR1	SSB.1 RedCap FR1	SSB.1 RedCap FR1	SSB.1 RedCap FR1
Time offset with Cell 1	Config 1,4	ms	-	3	-	3	-	3
	Config 2,3	µs	-	3	-	3	-	3
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3		SMTC.1					
OCNG Patterns			OCNG pattern 1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								
N_{oc} Note2	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15KHz	-106	-88	-114		
		NR_FDD_FR1_B				-113.5		
		NR_TDD_FR1_C				-113		
		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5		
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112		
		NR_FDD_FR1_F				-111.5		
		NR_FDD_FR1_G				-111		
		NR_FDD_FR1_H				-110.5		
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable Note 5	-94	-114		
		NR_FDD_FR1_B				-113.5		
		NR_TDD_FR1_C				-113		
		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5		
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112		
		NR_FDD_FR1_F				-111.5		
		NR_FDD_FR1_G				-111		
		NR_FDD_FR1_H				-110.5		
N_{oc} Note2	Config 1,2,4	dBm/SCS	-106	-88	Same as Noc/15kHz			

	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable ^{Note 5}		-91		-111	
		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{ot}$			dB	2.46	-5.97	2.46	-5.97	-0.01	-4.76
$\hat{E}_s/N_{oc}$			dB	6	1	6	1	3	0
SS-RSRP ^{Note 3}	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-100	-105	-82	-87	-	-
		NR_FDD_FR1_B						111.00	114.00
		NR_TDD_FR1_C						-	-
		NR_FDD_FR1_D, NR_TDD_FR1_D						110.50	113.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-	-
		NR_FDD_FR1_F						110.00	113.00
		NR_FDD_FR1_G						-	-
		NR_FDD_FR1_H						109.50	112.50
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable ^{Note 5}	Not applicable ^{Note 5}	-85	-90	-	-
		NR_FDD_FR1_B						108.00	111.00
		NR_TDD_FR1_C						-	-
		NR_FDD_FR1_D, NR_TDD_FR1_D						107.50	110.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-	-
		NR_FDD_FR1_F						107.00	110.00
		NR_FDD_FR1_G						-	-
		NR_FDD_FR1_H						106.50	109.50
I_o ^{Note 3}	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-70.09		-52.09		-80.03	
		NR_FDD_FR1_B						-79.53	
		NR_TDD_FR1_C						-79.03	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-78.53	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-78.03	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		Not applicable ^{Note 5}	Not applicable ^{Note 5}	-85	-90	-	-
		NR_FDD_FR1_B						108.00	111.00
		NR_TDD_FR1_C						-	-
		NR_FDD_FR1_D, NR_TDD_FR1_D						107.50	110.50
		NR_FDD_FR1_E, NR_TDD_FR1_E						-	-
		NR_FDD_FR1_F						107.00	110.00
		NR_FDD_FR1_G						-	-
		NR_FDD_FR1_H						106.50	109.50

Config 3	NR_FDD_FR1_F	dBm/ 38.16MHz	Not applicable ^{Note 5_}	-55.18	-77.53
	NR_FDD_FR1_G				-77.03
	NR_FDD_FR1_H				-76.53
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6				-77.12
	NR_FDD_FR1_B				-76.62
	NR_TDD_FR1_C				-76.12
	NR_FDD_FR1_D, NR_TDD_FR1_D				-75.62
	NR_FDD_FR1_E, NR_TDD_FR1_E				-75.12
	NR_FDD_FR1_F				-74.62
	NR_FDD_FR1_G				74.12
NR_FDD_FR1_H	73.62				
Propagation condition		-	AWGN		
Antenna configuration			1x2		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 5: Subtest 1 is not used when testing with 30kHz SSB SCS.					
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification					

A.16.7.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for cell 1 and cell 2 shall fulfil absolute requirement in clause 10.1A.2.1 and relative requirement in clause 10.1A.2.2 for 2RX RedCap UE.

A.16.7.1.3 SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE

A.16.7.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1A.4.1.1 and 10.1A.4.1.2 for inter-frequency measurements with the testing configurations for NR cells in Table A.16.7.1.3.1-1.

Table A.16.7.1.3.1-1: Applicable NR configurations for FR1 inter-frequency SS-RSRP accuracy test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.16.7.1.3.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.16.7.1.3.2-1 below.

Both absolute and relative accuracy of RSRP inter-frequency measurements is tested by using the parameters in Table A.16.7.1.3.2-1. The inter-frequency measurements are supported by a measurement gap.

Table A.16.7.1.3.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~4		freq1	freq2	freq1	freq2
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52		10: N _{RB,c} = 52	
	2		10: N _{RB,c} = 52		10: N _{RB,c} = 52	
	3		20: N _{RB,c} = 51		20: N _{RB,c} = 51	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
	4		HD-FDD		HD-FDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD		SR.1.1 TDD	
	3		SR.2.1 TDD		SR.2.1 TDD	
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD		CR.1.1 TDD	
	3		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1,4		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.1 RedCap FR1		SSB.1 RedCap FR1	
OCNG Patterns	1~4		OP.1		OP.1	
TRS configuration	1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	
	2		TRS.1.1 TDD		TRS.1.1 TDD	
	3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1	1,4	ms	-	3	-	3
	2,3	μs	-	3	-	3
SMTC configuration	1,4		SMTC.2		SMTC.2	
	2,3		SMTC.1		SMTC.1	
EPRE ratio of PSS to SSS	1~4	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						

EPRE ratio of PDSCH to PDSCH DMRS									
EPRE ratio of OCNG DMRS to SSS ^{Note 1}									
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}									
N_{oc} ^{Note2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1~4	dBm/15 kHz	-94.65		$(N_{oc}$ for Channel 2 +8dB)	-115		
	NR_FDD_FR1_B						-114.5		
	NR_TDD_FR1_C						-114		
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5		
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113		
	NR_FDD_FR1_F						-112.5		
	NR_FDD_FR1_G						-112		
	NR_FDD_FR1_H						-111.5		
	N_{oc} ^{Note2}						NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1,2,4	dBm/SS B SCS
NR_FDD_FR1_B		-114.5							
NR_TDD_FR1_C		-114							
NR_FDD_FR1_D, NR_TDD_FR1_D		-113.5							
NR_FDD_FR1_E, NR_TDD_FR1_E		-113							
NR_FDD_FR1_F		-112.5							
NR_FDD_FR1_G		-112							
NR_FDD_FR1_H		-111.5							
NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}		3	-91.65		$(N_{oc}$ for Channel 2 +8dB)	-112.00			
NR_FDD_FR1_B						-111.50			
NR_TDD_FR1_C						-111.00			
NR_FDD_FR1_D, NR_TDD_FR1_D						-110.50			
NR_FDD_FR1_E, NR_TDD_FR1_E						-110.00			
NR_FDD_FR1_F						-109.50			
NR_FDD_FR1_G						-109.00			
NR_FDD_FR1_H						-108.50			
$\hat{E}_s/I_{ot}$						1~4	dB	10	
SS-RSRP ^{Note3}		NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1,2,4	dBm/SC S	-84.65		(RSRP for Cell 2 +25dB)	-118.00	
	NR_FDD_FR1_B	-117.50							
	NR_TDD_FR1_C	-117.00							
	NR_FDD_FR1_D, NR_TDD_FR1_D	-116.50							
	NR_FDD_FR1_E, NR_TDD_FR1_E	-116.00							
	NR_FDD_FR1_F	-115.50							
	NR_FDD_FR1_G	-115.00							
	NR_FDD_FR1_H	-114.50							
	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	3						-84.65	
	NR_FDD_FR1_B		-114.50						
	NR_TDD_FR1_C		-114.00						

	NR_FDD_FR1_D, NR_TDD_FR1_D					-113.50
	NR_FDD_FR1_E, NR_TDD_FR1_E					-113.00
	NR_FDD_FR1_F					-112.50
	NR_FDD_FR1_G					-112.00
	NR_FDD_FR1_H					-111.50
Io ^{Note3}	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE5,	1,2,4	dBm/ 9.36MHz z	-56.28	(Io for Channel 2 +19.75dB)	-85.28
	NR_FDD_FR1_B					-84.78
	NR_TDD_FR1_C					-84.28
	NR_FDD_FR1_D, NR_TDD_FR1_D					-83.78
	NR_FDD_FR1_E, NR_TDD_FR1_E					-83.28
	NR_FDD_FR1_F					-82.78
	NR_FDD_FR1_G					-82.28
	NR_FDD_FR1_H					-81.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE5,	3	dBm/ 18.36M Hz	-53.33	(Io for Channel 2 +19.75dB)	-82.35
	NR_FDD_FR1_B					-81.85
	NR_TDD_FR1_C					-81.35
	NR_FDD_FR1_D, NR_TDD_FR1_D					-80.85
	NR_FDD_FR1_E, NR_TDD_FR1_E					-80.35
	NR_FDD_FR1_F					-79.85
	NR_FDD_FR1_G					-79.35
	NR_FDD_FR1_H					-78.85
$\hat{E}_s / N_{oc}$	1~4	dB	10	10	13	-3
Propagation condition	1~4	-	AWGN		AWGN	
Antenna configuration	1~4		1x1		1x1	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.						

A.16.7.1.3.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirement in clause 10.1A.4.1.1 and relative requirement in clause 10.1A.4.1.2.

A.16.7.1.4 SA inter-frequency case measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE

A.16.7.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1A.4.1.1 and 10.1A.4.1.2 for inter-frequency measurements with the testing configurations for NR cells in Table A.16.7.1.4.1-1.

Table A.16.7.1.4.1-1: Applicable NR configurations for FR1 inter-frequency SS-RSRP accuracy test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

A.16.7.1.4.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR1 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.16.7.1.4.1-1 below. Both absolute and relative accuracy of RSRP inter-frequency measurements is tested by using the parameters in Table A.16.7.1.4.11. The inter-frequency measurements are supported by a measurement gap.

Table A.16.7.1.4.2-1: SS-RSRP inter-frequency test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN	1~4		freq1	freq2	freq1	freq2
BW _{channel}	1,4	MHz	10: N _{RB,c} = 52		10: N _{RB,c} = 52	
	2		10: N _{RB,c} = 52		10: N _{RB,c} = 52	
	3		20: N _{RB,c} = 51		20: N _{RB,c} = 51	
Duplex mode	1		FDD		FDD	
	2		TDD		TDD	
	3		TDD		TDD	
	4		HD-FDD		HD-FDD	
TDD configuration	1		N/A		N/A	
	2		TDDConf.1.1		TDDConf.1.1	
	3		TDDConf.2.1		TDDConf.2.1	
PDSCH Reference measurement channel	1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	2		SR.1.1 TDD	-	SR.1.1 TDD	-
	3		SR.2.1 TDD	-	SR.2.1 TDD	-
RMSI CORESET Reference Channel	1,4		CR.1.1 FDD	-	CR.1.1 FDD	-
	2		CR.1.1 TDD	-	CR.1.1 TDD	-
	3		CR.2.1 TDD	-	CR.2.1 TDD	-
Dedicated CORESET Reference Channel	1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-
	2		CCR.1.1 TDD	-	CCR.1.1 TDD	-
	3		CCR.2.1 TDD	-	CCR.2.1 TDD	-
SSB configuration	1,4		SSB.1 FR1		SSB.1 FR1	
	2		SSB.1 FR1		SSB.1 FR1	
	3		SSB.1 RedCap FR1		SSB.1 RedCap FR1	
OCNG Patterns	1~4		OP.1		OP.1	
TRS configuration	1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-

		2		TRS.1.1 TDD		TRS.1.1 TDD	
		3		TRS.1.2 TDD		TRS.1.2 TDD	
Initial BWP Configuration		1~4		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration		1~4		DLBWP.1.1 ULBWP.1.1		DLBWP.1.1 ULBWP.1.1	
Time offset with Cell 1		1,4	ms	-	3	-	3
		2,3	μs	-	3	-	3
SMTTC configuration		1,4		SMTTC.2		SMTTC.2	
		2,3		SMTTC.1		SMTTC.1	
EPRE ratio of PSS to SSS		1~4	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH DMRS							
EPRE ratio of OCNG DMRS to SSS ^{Note 1}							
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}							
N_{oc} ^{Note 2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1~4	dBm/15 kHz	-94.65		$(N_{oc}$ for Channel 2 +8dB)	-115
	NR_FDD_FR1_B						-114.5
	NR_TDD_FR1_C						-114
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113
	NR_FDD_FR1_F						-112.5
	NR_FDD_FR1_G						-112
	NR_FDD_FR1_H						-111.5
N_{oc} ^{Note 2}	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	1,2,4	dBm/SS B SCS	-94.65		$(N_{oc}$ for Channel 2 +8dB)	-115
	NR_FDD_FR1_B						-114.5
	NR_TDD_FR1_C						-114
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113
	NR_FDD_FR1_F						-112.5
	NR_FDD_FR1_G						-112
	NR_FDD_FR1_H						-111.5
	NR_FDD_FR1_A, NR_TDD_FR1_A ^{NOTE 5}	3		-91.65		$(N_{oc}$ for Channel 2 +8dB)	-112.00
	NR_FDD_FR1_B						-111.50
	NR_TDD_FR1_C						-111.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-110.50

		NR_FDD_FR1_E, NR_TDD_FR1_E					-110.00
		NR_FDD_FR1_F					-109.50
		NR_FDD_FR1_G					-109.00
		NR_FDD_FR1_H					-108.50
$\hat{E}_s/I_{ot}$		1~4	dB	10	10	13	-3
SS- RSRP ^{Note3}	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4	dBm/SC S	-84.65		(RSRP for Cell 2 +25dB)	-118.00
	NR_FDD_FR1_B						-117.50
	NR_TDD_FR1_C						-117.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-116.50
	NR_FDD_FR1_E, NR_TDD_FR1_E						-116.00
	NR_FDD_FR1_F						-115.50
	NR_FDD_FR1_G						-115.00
	NR_FDD_FR1_H						-114.50
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-84.65		(RSRP for Cell 2 +25dB)	-115.00
	NR_FDD_FR1_B						-114.50
	NR_TDD_FR1_C						-114.00
	NR_FDD_FR1_D, NR_TDD_FR1_D						-113.50
	NR_FDD_FR1_E, NR_TDD_FR1_E						-113.00
	NR_FDD_FR1_F						-112.50
	NR_FDD_FR1_G						-112.00
	NR_FDD_FR1_H						-111.50
I_o ^{Note3}	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2,4	dBm/ 9.36MH z	-56.28		(I _o for Channel 2 +19.75dB)	-85.28
	NR_FDD_FR1_B						-84.78
	NR_TDD_FR1_C						-84.28
	NR_FDD_FR1_D, NR_TDD_FR1_D						-83.78
	NR_FDD_FR1_E, NR_TDD_FR1_E						-83.28
	NR_FDD_FR1_F						-82.78
	NR_FDD_FR1_G						-82.28
	NR_FDD_FR1_H						-81.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-53.33		(I _o for Channel 2 +19.75dB)	-82.35
	NR_FDD_FR1_B						-81.85
	NR_TDD_FR1_C						-81.35
	NR_FDD_FR1_D, NR_TDD_FR1_D						-80.85
	NR_FDD_FR1_E, NR_TDD_FR1_E						-80.35
	NR_FDD_FR1_F						-79.85
	NR_FDD_FR1_G						-79.35
	NR_FDD_FR1_H						-78.85
$\hat{E}_s/N_{oc}$		1~4	dB	10	10	13	-3
Propagation condition		1~4	-	AWGN		AWGN	
Antenna configuration		1~4		1x2		1x2	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							

Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.16.7.1.4.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirement in clause 10.1A.4.1.1 and relative requirement in clause 10.1A.4.1.2.

A.16.7.2 SS-RSRQ

A.16.7.2.1 SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE

A.16.7.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.6.

A.16.7.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.16.7.2.1.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is tested by using the parameters in Table A.16.7.2.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.16.7.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.7.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1, 4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1, 4	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		20: N _{RB,c} = 51					

BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP			ULBWP.1.1				
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Control Channel RMC	Config 1, 4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS Configuration	Config 1, 4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OP. 1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 1	Config 1,4	ms	-	3	-	3	-	3
	Config 2,3	μs	-	3	-	3	-	3
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3		SMTC.1					
SSB configuration	Config 1,2,4		SSB.1 FR1					
	Config 3		SSB.1 RedCap FR1					
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								

EPRE ratio of OCNG to OCNG DMRS (Note 1)									
N_{oc} ^{Note2}	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz z	-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-91		-		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} ^{Note2}	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-88		-		-111	
		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{ot}$			dB	-1.76		-4.7		-5..46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
SS- RSRP ^{Note3}	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-82	-82	-103.9	-103.9	-118	-118
		NR_FDD_FR1_B						-117.5	-117.5

		NR_TDD_FR1_C					-117	-117	
		NR_FDD_FR1_D, NR_TDD_FR1_D					-116.5	-116.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E					-116	-116	
		NR_FDD_FR1_F					-115.5	-115.5	
		NR_FDD_FR1_G					-115	-115	
		NR_FDD_FR1_H					-114.5	-114.5	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85	-85	-	-	-115	-115
		NR_FDD_FR1_B						-114.5	-114.5
		NR_TDD_FR1_C						-114	-114
		NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5	-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-113	-113
		NR_FDD_FR1_F						-112.5	-112.5
		NR_FDD_FR1_G						-112	-112
		NR_FDD_FR1_H						-111.5	-111.5
SS-RSRQ ^{Note3}		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	- 14.77	- 14.77	-16.76	-16.76	-17.34	-17.34
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D, NR_TDD_FR1_D							
		NR_FDD_FR1_E, NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io ^{Note3}	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-50		-70		-83.5	
		NR_FDD_FR1_B						-83	
		NR_TDD_FR1_C						-82.5	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-82	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-81.5	
		NR_FDD_FR1_F						-81	
		NR_FDD_FR1_G						-80.5	
		NR_FDD_FR1_H						-80	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 18.36MHz	-50		-		-80.6	
		NR_FDD_FR1_B						-80.1	
		NR_TDD_FR1_C						-79.6	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-79.1	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-78.6	
		NR_FDD_FR1_F						-78.1	
		NR_FDD_FR1_G						-77.6	
		NR_FDD_FR1_H						-77.1	

Propagation condition	-	AWG N	AWG N	AWGN	AWGN	AWGN	AWG N
Antenna configuration		1x1	1x1	1x1	1x1	1x1	1x1
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3:	SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4:	SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5:	NR operating band groups are as defined in clause 3.5.2.						
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.						

A.16.7.2.1.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1A.6.

A.16.7.2.2 SA: Intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE

A.16.7.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.6.

A.16.7.2.2.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.16.7.2.2.2-1. The absolute accuracy of SS-RSRQ intra-frequency measurement is tested by using the parameters in Table A.16.7.2.2.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.16.7.2.2.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.7.2.2.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1		freq1	
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1, 4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1, 4	MHz	10: N _{RB,c} = 52					

	Config 2		10: $N_{RB,c} = 52$					
	Config 3		20: $N_{RB,c} = 51$					
BWP configuration	Initial DL BWP		DLBWP.0.1					
	Dedicated DL BWP		DLBWP.1.1					
	Initial UL BWP		ULBWP.0.1					
	Dedicated UL BWP		ULBWP.1.1					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1, 4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1, 4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD		CR.2.1 TDD	
Control Channel RMC	Config 1, 4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2.1 TDD		CCR.2.1 TDD		CCR.2.1 TDD	
TRS Configuration	Config 1, 4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OP. 1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 1	Config 1,4	ms	-	3	-	3	-	3
	Config 2,3	μ s	-	3	-	3	-	3
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3		SMTC.1					
SSB configuration	Config 1,2,4		SSB.1 FR1					
	Config 3		SSB.1 RedCap FR1					
CSI-RS for tracking	Config 1,4		TRS.1.1 FDD					
	Config 2		TRS.1.1 TDD					
	Config 3		TRS.1.2 TDD					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15 kHz					
	Config 3		30kHz					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								
EPRE ratio of OCNG to OCNG DMRS (Note 1)								

N_{oc} ^{Note2}	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz z	-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-91		-		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
N_{oc} ^{Note2}	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-85		-101		-114	
		NR_FDD_FR1_B						-113.5	
		NR_TDD_FR1_C						-113	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-112.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-112	
		NR_FDD_FR1_F						-111.5	
		NR_FDD_FR1_G						-111	
		NR_FDD_FR1_H						-110.5	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-88		-		-111	
		NR_FDD_FR1_B						-110.5	
		NR_TDD_FR1_C						-110	
		NR_FDD_FR1_D, NR_TDD_FR1_D						-109.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E						-109	
		NR_FDD_FR1_F						-108.5	
		NR_FDD_FR1_G						-108	
		NR_FDD_FR1_H						-107.5	
$\hat{E}_s/I_{\text{off}}$			dB	-1.76		-4.7		-5.46	-5.46
$\hat{E}_s/N_{oc}$			dB	3	3	-2.9	-2.9	-4	-4
SS-RSRP ^{Note 3}	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-82	-82	-103.9	-103.9	-118	-118
		NR_FDD_FR1_B						-117.5	-117.5
		NR_TDD_FR1_C						-117	-117

		NR_FDD_FR1_D, NR_TDD_FR1_D						-116.5	-116.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-116	-116
		NR_FDD_FR1_F						-115.5	-115.5
		NR_FDD_FR1_G						-115	-115
		NR_FDD_FR1_H						-114.5	-114.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6						-115	-115
		NR_FDD_FR1_B						-114.5	-114.5
		NR_TDD_FR1_C						-114	-114
		NR_FDD_FR1_D, NR_TDD_FR1_D						-113.5	-113.5
		NR_FDD_FR1_E, NR_TDD_FR1_E						-113	-113
		NR_FDD_FR1_F						-112.5	-112.5
		NR_FDD_FR1_G						-112	-112
		NR_FDD_FR1_H						-111.5	-111.5
SS-RSRQ	Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	-14.77	-14.77	-16.76	-16.76	-17.34	-17.34
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D, NR_TDD_FR1_D							
		NR_FDD_FR1_E, NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io	Note3	Config 1,2,4	dBm/ 9.36MHz	-50		-70		-83.5	
									-83
									-82.5
									-82
									-81.5
									-81
									-80.5
									-80
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 18.36MHz	-50		-		-80.6	
									-80.1
									-79.6
									-79.1
									-78.6
									-78.1
									-77.6
									-77.1

Propagation condition	-	AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2	1x2	1x2
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3:	SS-RSRQ, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4:	SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5:	NR operating band groups are as defined in clause 3.5.2.						
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.						

A.16.7.2.2.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1A.6.

A.16.7.2.3 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE

A.16.7.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.8.1.1 and 10.1A.8.1.2.

A.16.7.2.3.2 Test parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.16.7.2.3.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.16.7.2.3.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.16.7.2.3.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.16.7.2.3.2-2: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52					

		Config 2			10: N _{RB,c} = 52						
		Config 3			20: N _{RB,c} = 51						
Gap pattern ID		Config 1,2,3,4			0						
BWP BW		Config 1,4			10: N _{RB,c} = 52						
		Config 2			10: N _{RB,c} = 52						
		Config 3			20: N _{RB,c} = 51						
DRX Cycle			ms		Not Applicable						
PDSCH Reference measurement channel		Config 1,4			SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-	
		Config 2			SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD		
		Config 3			SR2.1 TDD		SR2.1 TDD		SR2.1 TDD		
RMSI CORESET Reference Channel		Config 1,4			CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD		
		Config 2			CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD		
		Config 3			CR2.1 TDD		CR2.1 TDD		CR2.1 TDD		
Dedicated CORESET Reference Channel		Config 1,4			CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-	
		Config 2			CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD		
		Config 3			CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD		
TRS Configuration		Config 1,4			TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-	
		Config 2			TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD		
		Config 3			TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD		
OCNG Patterns					OCNG pattern 1						
Time offset with Cell 1		Config 1,4	ms		-	3	-	3	-	3	
		Config 2,3	µs		-	3	-	3	-	3	
SMTc configuration		Config 1,4			SMTc 2						
		Config 2,3			SMTc 1						
SSB configuration		Config 1,2,4			SSB 1 FR1						
		Config 3			SSB.1 RedCap FR1						
PDSCH/PDCCH subcarrier spacing		Config 1,2,4	kHz		15						
		Config 3			30						
EPRE ratio of PSS to SSS				dB		0	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS											
EPRE ratio of PBCH to PBCH DMRS											
EPRE ratio of PDCCH DMRS to SSS											
EPRE ratio of PDCCH to PDCCH DMRS											
EPRE ratio of PDSCH DMRS to SSS											
EPRE ratio of PDSCH to PDSCH											
EPRE ratio of OCNG DMRS to SSS(Note 1)											
EPRE ratio of OCNG to OCNG DMRS (Note 1)											
N _{oc} Note2	Config 1,2,4	NR_FDD_FR1_A	dBm/15kHz	-80.18		-106		-116			
		NR_TDD_FR1_A									
		NR_FDD_FR1_B								-115.5	
		NR_TDD_FR1_C									
		NR_FDD_FR1_D						-114.5			
		NR_TDD_FR1_D									
		NR_FDD_FR1_E						-114			
		NR_TDD_FR1_E									
NR_FDD_FR1_F	-113.5										
NR_FDD_FR1_G			-113								

N_{oc} Note2	Config 3	NR_FDD_FR1_H	dBm/15kHz	-86.27	-113	-112.5			
		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6				-116			
		NR_FDD_FR1_B				-115.5			
		NR_TDD_FR1_C				-115			
		NR_FDD_FR1_D NR_TDD_FR1_D				-114.5			
		NR_FDD_FR1_E NR_TDD_FR1_E				-114			
		NR_FDD_FR1_F				-113.5			
		NR_FDD_FR1_G				-113			
		NR_FDD_FR1_H				-112.5			
N_{oc} Note2	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18	-106	-116			
		NR_FDD_FR1_B				-115.5			
		NR_TDD_FR1_C				-115			
		NR_FDD_FR1_D NR_TDD_FR1_D				-114.5			
		NR_FDD_FR1_E NR_TDD_FR1_E				-114			
		NR_FDD_FR1_F				-113.5			
		NR_FDD_FR1_G				-113			
		NR_FDD_FR1_H				-112.5			
		Config 3				NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	-83.27	-110	-113
	NR_FDD_FR1_B		-112.5						
	NR_TDD_FR1_C		-112						
	NR_FDD_FR1_D NR_TDD_FR1_D		-111.5						
	NR_FDD_FR1_E NR_TDD_FR1_E		-111						
	NR_FDD_FR1_F		-110.5						
	NR_FDD_FR1_G		-110						
	NR_FDD_FR1_H		-109.5						
	$\hat{E}_s / I_{ot}$			dB	-1.75	-1.75			3
	$\hat{E}_s / N_{oc}$			dB	-1.75	-1.75	3	-1.75	
SS-RSRP ^{Not e3}	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-81.93	-81.93	-107.75	-107.75	-113	-117.75
		NR_FDD_FR1_B						-112.5	-117.25
		NR_TDD_FR1_C						-112	-116.75
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	-116.25
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	-115.75
		NR_FDD_FR1_F						-110.5	-115.2
		NR_FDD_FR1_G						-110	-114.75

		NR_FDD_FR1_H						-109.5	- 114.2 5
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85.02	-85.02	- 111.75	- 111.75	-110	- 114.7 5
		NR_FDD_FR1_B						-109.5	- 114.2 5
		NR_TDD_FR1_C						-109	- 113.7 5
		NR_FDD_FR1_D NR_TDD_FR1_D						-108.5	- 113.2 5
		NR_FDD_FR1_E NR_TDD_FR1_E						-108	- 112.7 5
		NR_FDD_FR1_F						-107.5	- 112.2
		NR_FDD_FR1_G						-107	- 111.7 5
		NR_FDD_FR1_H						-106.5	- 111.2 5
SS-RSRQ ^{Note3}		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-14.77	-14.77	-14.77	-14.77	12.56	14.76
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D NR_TDD_FR1_D							
		NR_FDD_FR1_E NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io ^{Note3}	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-53.17		-79.90		-80.36	- 82.90
		NR_FDD_FR1_B						-79.86	- 82.40
		NR_TDD_FR1_C						-79.36	- 81.90
		NR_FDD_FR1_D NR_TDD_FR1_D						-78.86	- 81.40
		NR_FDD_FR1_E NR_TDD_FR1_E						-78.36	- 80.90
		NR_FDD_FR1_F						-77.86	- 80.40
		NR_FDD_FR1_G						-77.36	- 79.90
		NR_FDD_FR1_H						-76.86	- 79.40
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-50		-76.73		-80.36	- 82.90
		NR_FDD_FR1_B						-79.86	- 82.40

		NR_TDD_FR1_C						-79.36	-
		NR_FDD_FR1_D						-78.86	-
		NR_TDD_FR1_D							81.40
		NR_FDD_FR1_E						-78.36	-
		NR_TDD_FR1_E							80.90
		NR_FDD_FR1_F						-77.86	-
									80.40
		NR_FDD_FR1_G						-77.36	-
									79.90
		NR_FDD_FR1_H						-76.86	-
									79.40
Propagation condition			-	AWG N	AWGN	AWGN	AWGN	AWG N	AWG N
Antenna configuration				1x1	1x1	1x1	1x1	1x1	1x1
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3:	SS-RSRQ, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 4:	SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.								
Note 5:	NR operating band groups are as defined in clause 3.5.2.								
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.								

A.16.7.2.3.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1A.8.1.1 and 10.1A.8.1.2.

A.16.7.2.4 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE

A.16.7.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.8.1.1 and 10.1A.8.1.2.

A.16.7.2.4.2 Test parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.16.7.2.4.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.16.7.2.4.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.16.7.2.4.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.16.7.2.4.2-2: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
BW _{channel}	Config 1,4	MHz	10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		20: N _{RB,c} = 51					
Gap pattern ID	Config 1,2,3,4		0					
BWP BW	Config 1,4		10: N _{RB,c} = 52					
	Config 2		10: N _{RB,c} = 52					
	Config 3		20: N _{RB,c} = 51					
DRX Cycle		ms	Not Applicable					
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	R.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
TRS Configuration	Config 1,4		TRS.1.1 FDD	-	TRS.1.1 FDD	-	TRS.1.1 FDD	-
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
OCNG Patterns			OP.1					
Time offset with Cell 1	Config 1,4	ms	-	3	-	3	-	3
	Config 2,3	μs	-	3	-	3	-	3
SMTC configuration	Config 1,4		SMTC.2					
	Config 2,3		SMTC.1					
SSB configuration	Config 1,2,4		SSB.1 in FR1					
	Config 3		SSB.1 RedCap FR1					
PDSCH/PDCCH subcarrier spacing	Config 1,2,4	kHz	15					
	Config 3		30					
EPRE ratio of PSS to SSS		dB	0	0	0	0	0	0
EPRE ratio of PBCH DMRS to SSS								
EPRE ratio of PBCH to PBCH DMRS								
EPRE ratio of PDCCH DMRS to SSS								
EPRE ratio of PDCCH to PDCCH DMRS								
EPRE ratio of PDSCH DMRS to SSS								
EPRE ratio of PDSCH to PDSCH								
EPRE ratio of OCNG DMRS to SSS(Note 1)								

EPRE ratio of OCNG to OCNG DMRS (Note 1)											
N_{oc} Note2	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18		-106		-116			
		NR_FDD_FR1_B						-115.5			
		NR_TDD_FR1_C						-115			
		NR_FDD_FR1_D NR_TDD_FR1_D						-114.5			
		NR_FDD_FR1_E NR_TDD_FR1_E						-114			
		NR_FDD_FR1_F						-113.5			
		NR_FDD_FR1_G						-113			
		NR_FDD_FR1_H						-112.5			
		N_{oc} Note2						Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-86.27
NR_FDD_FR1_B	-115.5										
NR_TDD_FR1_C	-115										
NR_FDD_FR1_D NR_TDD_FR1_D	-114.5										
NR_FDD_FR1_E NR_TDD_FR1_E	-114										
NR_FDD_FR1_F	-113.5										
NR_FDD_FR1_G	-113										
NR_FDD_FR1_H	-112.5										
N_{oc} Note2	Config 1,2,4		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-80.18		-106		-116		
		NR_FDD_FR1_B	-115.5								
		NR_TDD_FR1_C	-115								
		NR_FDD_FR1_D NR_TDD_FR1_D	-114.5								
		NR_FDD_FR1_E NR_TDD_FR1_E	-114								
		NR_FDD_FR1_F	-113.5								
		NR_FDD_FR1_G	-113								
		NR_FDD_FR1_H	-112.5								
		Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6						-83.27		-110
	NR_FDD_FR1_B		-112.5								
	NR_TDD_FR1_C		-112								
	NR_FDD_FR1_D NR_TDD_FR1_D		-111.5								
	NR_FDD_FR1_E NR_TDD_FR1_E		-111								
	NR_FDD_FR1_F		-110.5								
	NR_FDD_FR1_G		-110								
	NR_FDD_FR1_H		-109.5								
	$\hat{E}_s / I_{ot}$				dB	-1.75		-1.75		3	-1.75
$\hat{E}_s / N_{oc}$			dB	-1.75		-1.75		3	-1.75		
SS-RSRP ^{Not e3}	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-81.93	-81.93	-	-	107.75	107.75	-113	-
		NR_FDD_FR1_B								-112.5	-
										117.75	5
										117.25	5

		NR_TDD_FR1_C						-112	- 116.7 5
		NR_FDD_FR1_D NR_TDD_FR1_D						-111.5	- 116.2 5
		NR_FDD_FR1_E NR_TDD_FR1_E						-111	- 115.7 5
		NR_FDD_FR1_F						-110.5	- 115.2
		NR_FDD_FR1_G						-110	- 114.7 5
		NR_FDD_FR1_H						-109.5	- 114.2 5
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	-85.02	-85.02	- 111.75	- 111.75	-110	- 114.7 5	
		NR_FDD_FR1_B					-109.5	- 114.2 5	
		NR_TDD_FR1_C					-109	- 113.7 5	
		NR_FDD_FR1_D NR_TDD_FR1_D					-108.5	- 113.2 5	
		NR_FDD_FR1_E NR_TDD_FR1_E					-108	- 112.7 5	
		NR_FDD_FR1_F					-107.5	- 112.2	
		NR_FDD_FR1_G					-107	- 111.7 5	
		NR_FDD_FR1_H					-106.5	- 111.2 5	
SS-RSRQ ^{Note3}		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-14.77	-14.77	-14.77	-14.77	-12.56	- 14.76
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D NR_TDD_FR1_D							
		NR_FDD_FR1_E NR_TDD_FR1_E							
		NR_FDD_FR1_F							
		NR_FDD_FR1_G							
		NR_FDD_FR1_H							
Io ^{Note3}	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-50		-75.83		-83.28	- 85.83
NR_FDD_FR1_B		-82.78						- 85.33	
NR_TDD_FR1_C		-82.28						- 84.83	
NR_FDD_FR1_D NR_TDD_FR1_D		-81.78						- 84.33	

		NR_FDD_FR1_E						-81.28	-		
		NR_TDD_FR1_E						83.83			
		NR_FDD_FR1_F						-80.78	-		
								83.33			
	NR_FDD_FR1_G	-80.28						-			
		82.83									
	NR_FDD_FR1_H	-79.78						-			
		82.33									
	Config 3	NR_FDD_FR1_A						-53.17	-79.90	-80.36	-
		NR_TDD_FR1_A								82.90	
		NOTE 6									
		NR_FDD_FR1_B								-79.86	-
										82.40	
		NR_TDD_FR1_C								-79.36	-
										81.90	
		NR_FDD_FR1_D								-78.86	-
NR_TDD_FR1_D		81.40									
NR_FDD_FR1_E	-78.36	-									
NR_TDD_FR1_E		80.90									
NR_FDD_FR1_F	-77.86	-									
	80.40										
NR_FDD_FR1_G	-77.36	-									
	79.90										
NR_FDD_FR1_H	-76.86	-									
	79.40										
Propagation condition			-	AWG N	AWGN	AWGN	AWGN	AWG N	AWG N		
Antenna configuration				1x2	1x2	1x2	1x2	1x2	1x2		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.											
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.											
Note 3: SS-RSRQ, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.											
Note 4: SS-RSRQ, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.											
Note 5: NR operating band groups are as defined in clause 3.5.2.											
Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.											

A.16.7.2.4.3 Test Requirements

The SS-RSRQ measurement accuracy shall fulfil the requirements in clause 10.1A.8.1.1 and 10.1A.8.1.2.

A.16.7.3 SS-SINR

A.16.7.3.1 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE

A.16.7.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1A.10.1.

A.16.7.3.1.2 Test parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.16.7.3.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.16.7.3.1.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.16.7.3.1.2-1: SS-SINR Intra frequency supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.16.7.3.1.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
	Config 4		HD-FDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1,4		TRS.1.1 FDD		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR.2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR.2.1 TDD		CR.2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1. 1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1. 1 TDD		CCR.1.1 TDD	
	Config 3		CCR.2. 1 TDD		CCR.2.1 TDD	
OCNG Patterns			OP.1			
SS-RSSI-Measurement			Not Applicable			
SMTC configuration	Config 1,4		SMTC.2			
	Config 2,3		SMTC.1			
	Config 1,4	ms	-	3	-	3

Time offset with Cell 1		Config 2,3	μs	-	3	-	3
SSB configuration		Config 1,2	kHz	SSB.1 FR1			
		Config 3		SSB.1 RedCap FR1			
PDSCH/PDCCH subcarrier spacing		Config 1,2,4		15			
		Config 3	30				
EPRE ratio of PSS to SSS			dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc} ^{Note2}		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/15kHz	-93		-116	
		NR_FDD_FR1_B				-115.5	
		NR_TDD_FR1_C				-115	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-114.5	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-114	
		NR_FDD_FR1_F				-113.5	
		NR_FDD_FR1_G				-113	
		NR_FDD_FR1_H				-112.5	
		N_{oc} Note2				Config 1,2,4	
Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-90		-113		
	NR_FDD_FR1_B				-112.5		
	NR_TDD_FR1_C				-112		
	NR_FDD_FR1_D, NR_TDD_FR1_D				-111.5		
	NR_FDD_FR1_E, NR_TDD_FR1_E				-111		
	NR_FDD_FR1_F				-110.5		
	NR_FDD_FR1_G				-110		
	NR_FDD_FR1_H				-109.5		
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
SS-RSRP ^{Not e3}	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-88.46	-90.34	-120	-120
		NR_FDD_FR1_B				-119.5	-119.5
		NR_TDD_FR1_C				-119	-119
		NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5	-118.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-118	-118
		NR_FDD_FR1_F				-117.5	-117.5
		NR_FDD_FR1_G				-117	-117
		NR_FDD_FR1_H				-116.5	-116.5

	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85.46	-87.34	-117	-117
		NR_FDD_FR1_B				-116.5	-116.5
		NR_TDD_FR1_C				-116	-116
		NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5	-115.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-115	-115
		NR_FDD_FR1_F				-114.5	-114.5
		NR_FDD_FR1_G				-114	-114
		NR_FDD_FR1_H				-113.5	-113.5
SS-SINR ^{Note3}		NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dB	0	-3.19	-5.46	-5.46
		NR_FDD_FR1_B					
		NR_TDD_FR1_C					
		NR_FDD_FR1_D, NR_TDD_FR1_D					
		NR_FDD_FR1_E, NR_TDD_FR1_E					
		NR_FDD_FR1_F					
		NR_FDD_FR1_G					
		NR_FDD_FR1_H					
Io ^{Note3}	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.5		-85.51	
		NR_FDD_FR1_B				-85.01	
		NR_TDD_FR1_C				-84.51	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-84.01	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-83.51	
		NR_FDD_FR1_F				-83.01	
		NR_FDD_FR1_G				-82.51	
		NR_FDD_FR1_H				-82.01	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 18.36MHz	-54.57		-82.57	
		NR_FDD_FR1_B				-82.07	
		NR_TDD_FR1_C				-81.57	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-81.07	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-81.07	
		NR_FDD_FR1_F				-80.57	
		NR_FDD_FR1_G				-80.07	
		NR_FDD_FR1_H				-79.57	
Propagation condition			-	AWGN			
Antenna configuration			-	1x1			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3: SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4: SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.							
Note 5: NR operating band groups are as defined in clause 3.5.2.							

Note 6: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.16.7.3.1.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1A.10.1.1 and 10.1A.10.1.2

A.16.7.3.2 SA intra-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE

A.16.7.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1A.10.1.

A.16.7.3.2.2 Test parameters

In this test case all cells are on the same carrier frequency. Supported test configuration are shown in Table A.16.7.3.2.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is tested by using the parameters in Table A.16.7.3.2.22. In all test cases, Cell 1 is the PCell and Cell 2 is the target cell.

Table A.16.7.3.2.2-1: SS-SINR Intra frequency supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.16.7.3.2.2-2: SS-SINR Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1		freq1	
Duplex mode	Config 1		FDD			
	Config 2,3		TDD			
	Config 4		HD-FDD			
TDD configuration	Config 1,4		Not Applicable			
	Config 2		TDDConf.1.1			
	Config 3		TDDConf.2.1			
Downlink initial BWP configuration			DLBWP.0.1			
Downlink dedicated BWP configuration			DLBWP.1.1			
Uplink initial BWP configuration			ULBWP.0.1			
Uplink dedicated BWP configuration			ULBWP.1.1			
DRX Cycle configuration		ms	Not Applicable			
TRS configuration	Config 1,4		TRS.1.1 FDD		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD	

		NR_FDD_FR1_H				-109.5	
$\hat{E}_s / I_{ot}$			dB	0	-3.19	-5.46	-5.46
$\hat{E}_s / N_{oc}$			dB	4.54	2.66	-4	-4
SS-RSRP ^{Not e3}	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/SCS	-88.46	-90.34	-120	-120
		NR_FDD_FR1_B				-119.5	-119.5
		NR_TDD_FR1_C				-119	-119
		NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5	-118.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-118	-118
		NR_FDD_FR1_F				-117.5	-117.5
		NR_FDD_FR1_G				-117	-117
		NR_FDD_FR1_H				-116.5	-116.5
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		-85.46	-87.34	-117	-117
		NR_FDD_FR1_B				-116.5	-116.5
		NR_TDD_FR1_C				-116	-116
		NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5	-115.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-115	-115
		NR_FDD_FR1_F				-114.5	-114.5
		NR_FDD_FR1_G				-114	-114
		NR_FDD_FR1_H				-113.5	-113.5
	SS-SINR ^{Note3}	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6		0	-3.19	-5.46	-5.46
		NR_FDD_FR1_B					
		NR_TDD_FR1_C					
		NR_FDD_FR1_D, NR_TDD_FR1_D					
		NR_FDD_FR1_E, NR_TDD_FR1_E					
		NR_FDD_FR1_F					
		NR_FDD_FR1_G					
		NR_FDD_FR1_H					
Io ^{Note3}	Config 1,2,4	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 9.36MHz	-57.5		-85.51	
		NR_FDD_FR1_B				-85.01	
		NR_TDD_FR1_C				-84.51	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-84.01	
		NR_FDD_FR1_E, NR_TDD_FR1_E				-83.51	
		NR_FDD_FR1_F				-83.01	
		NR_FDD_FR1_G				-82.51	
		NR_FDD_FR1_H				-82.01	
	Config 3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 6	dBm/ 18.36MHz	-54.57		-82.57	
		NR_FDD_FR1_B				-82.07	
		NR_TDD_FR1_C				-81.57	
		NR_FDD_FR1_D, NR_TDD_FR1_D				-81.07	

		NR_FDD_FR1_E, NR_TDD_FR1_E			-81.07
		NR_FDD_FR1_F			-80.57
		NR_FDD_FR1_G			-80.07
		NR_FDD_FR1_H			-79.57
Propagation condition			-	AWGN	
Antenna configuration			-	1x2	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3:	SS-SINR, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4:	SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5:	NR operating band groups are as defined in clause 3.5.2.				
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.				

A.16.7.3.3 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 1 Rx UE

A.16.7.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.12.1.

A.16.7.3.3.2 Test parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.16.7.3.3.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.16.7.3.3.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.16.7.3.3.2-1: SS-SINR Inter frequency supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.16.7.3.3.2-2: SS-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					

Uplink initial BWP configuration				ULBWP.0.1						
Uplink dedicated BWP configuration				ULBWP.1.1						
DRX Cycle configuration			ms	Not Applicable						
Gap pattern ID				0	-	0	-	0	-	
TRS configuration	Config 1,4			TRS.1.1 FDD		TRS.1.1 FDD		TRS.1.1 FDD		
	Config 2			TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD		
	Config 3			TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD		
PDSCH Reference measurement channel	Config 1,4			SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-	
	Config 2			SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD		
	Config 3			SR2.1 TDD		SR2.1 TDD		SR2.1 TDD		
RMSI CORESET Reference Channel	Config 1,4			CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD		
	Config 2			CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD		
	Config 3			CR2.1 TDD		CR2.1 TDD		CR2.1 TDD		
Dedicated CORESET Reference Channel	Config 1,4			CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-	
	Config 2					CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD
	Config 3					CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD
OCNG Patterns				OP.1						
SS-RSSI-Measurement				Not Applicable						
Time offset with Cell 1	Config 1,4		ms	-	3	-	3	-	3	
	Config 2,3		μs	-	3	-	3	-	3	
SMTc configuration	Config 1,4			SMTc 2						
	Config 2,3			SMTc 1						
SSB configuration	Config 1,2,4			SSB.1 FR1						
	Config 3			SSB.1 RedCap FR1						
PDSCH/PDCCH subcarrier spacing	Config 1,2,4		kHz	15						
	Config 3			30						
EPRE ratio of PSS to SSS			dB	0	0	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS										
EPRE ratio of PBCH to PBCH DMRS										
EPRE ratio of PDCCH DMRS to SSS										
EPRE ratio of PDCCH to PDCCH DMRS										
EPRE ratio of PDSCH DMRS to SSS										
EPRE ratio of PDSCH to PDSCH										
EPRE ratio of OCNG DMRS to SSS(Note 1)										
EPRE ratio of OCNG to OCNG DMRS (Note 1)										
N _{oc} Note2	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-88		-108.5		-119.5		
		NR_FDD_FR1_B						-119		
		NR_TDD_FR1_C						-118.5		
		NR_FDD_FR1_D NR_TDD_FR1_D						-118		
		NR_FDD_FR1_E NR_TDD_FR1_E						-117.5		
		NR_FDD_FR1_F						-117		
		NR_FDD_FR1_G						-116.5		

		NR_FDD_FR1_H						-116	
N_{oc} Note2	Config 1,2,4		dBm/SCS	-88		-108.5		Same as Noc for 15kHz	
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6			-85		-105.5		-116.5
		NR_FDD_FR1_B							-116
		NR_TDD_FR1_C							-115.5
		NR_FDD_FR1_D NR_TDD_FR1_D							-115
		NR_FDD_FR1_E NR_TDD_FR1_E							-114.5
		NR_FDD_FR1_F							-114
		NR_FDD_FR1_G							-114.5
		NR_FDD_FR1_H							-113
$\hat{E}_s/I_{ot}$			dB	-1.75	-1.75	20	20	-4.0	-4.0
$\hat{E}_s/N_{oc}$			dB	-1.75		20		-4.0	
SS- RSRP Note3	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-89.75		-88.5		-123.5	
		NR_FDD_FR1_B						-123	
		NR_TDD_FR1_C						-122.5	
		NR_FDD_FR1_D NR_TDD_FR1_D						-122	
		NR_FDD_FR1_E NR_TDD_FR1_E						-121.5	
		NR_FDD_FR1_F						-121	
		NR_FDD_FR1_G						-120.5	
		NR_FDD_FR1_H						-120	
	Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-86.75		-85.5		-120.5	
		NR_FDD_FR1_B						-120	
		NR_TDD_FR1_C						-119.5	
		NR_FDD_FR1_D NR_TDD_FR1_D						-119	
		NR_FDD_FR1_E NR_TDD_FR1_E						-118.5	
		NR_FDD_FR1_F						-118	
		NR_FDD_FR1_G						-117.5	
		NR_FDD_FR1_H						-117	
SS-SINR ^{Note3}		NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dB	-1.75		20		-4.0	
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D NR_TDD_FR1_D							
		NR_FDD_FR1_E NR_TDD_FR1_E							
		NR_FDD_FR1_E							

		NR_FDD_FR1_G					
		NR_FDD_FR1_H					
Io ^{Note3}	Config 1,2,4	NR_FDD_FR1_A	dBm/ 9.36MHz	-57.83	-60.5	-90.09	
		NR_TDD_FR1_A					
		NOTE 6					
		NR_FDD_FR1_B					-89.59
		NR_TDD_FR1_C					-89.09
		NR_FDD_FR1_D					-88.59
		NR_TDD_FR1_D					
		NR_FDD_FR1_E					
		NR_TDD_FR1_E					-88.09
	NR_FDD_FR1_F	-87.59					
	NR_FDD_FR1_G	-87.09					
	NR_FDD_FR1_H	-86.59					
	Config 3	NR_FDD_FR1_A	dBm/ 18.36MHz	-54.87	-57.57	-87.97	
		NR_TDD_FR1_A					
		NOTE 6					
		NR_FDD_FR1_B					-87.47
		NR_TDD_FR1_C					-86.97
		NR_FDD_FR1_D					-86.47
		NR_TDD_FR1_D					
NR_FDD_FR1_E							
NR_TDD_FR1_E	-85.97						
NR_FDD_FR1_F	-85.47						
NR_FDD_FR1_G	-84.97						
NR_FDD_FR1_H	-84.47						
Propagation condition			-	AWGN			
Antenna configuration			-	1x1			
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3:	SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4:	SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.						
Note 5:	NR operating band groups are as defined in clause 3.5.2.						
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.						

A.16.7.3.3.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1A.12.1.1 and 10.1A.12.1.2.

A.16.7.3.4 SA Inter-frequency measurement accuracy with FR1 serving cell and FR1 target cell for 2 Rx UE

A.16.7.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.12.1.

A.16.7.3.4.2 Test parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.16.7.3.4.2-1. Both absolute accuracy and relative

accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.16.7.3.4.2-2. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.16.7.3.4.2-1: Inter frequency SS-SINR supported test configurations

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations in each supported band	

Table A.16.7.3.4.2-2: SS-SINR Inter frequency test parameters

Parameter		Unit	Test 1		Test 2		Test 3	
			Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode	Config 1		FDD					
	Config 2,3		TDD					
	Config 4		HD-FDD					
TDD configuration	Config 1,4		Not Applicable					
	Config 2		TDDConf.1.1					
	Config 3		TDDConf.2.1					
Downlink initial BWP configuration			DLBWP.0.1					
Downlink dedicated BWP configuration			DLBWP.1.1					
Uplink initial BWP configuration			ULBWP.0.1					
Uplink dedicated BWP configuration			ULBWP.1.1					
DRX Cycle configuration		ms	Not Applicable					
Gap pattern ID			0	-	0	-	0	-
TRS configuration	Config 1,4		TRS.1.1 FDD		TRS.1.1 FDD		TRS.1.1 FDD	
	Config 2		TRS.1.1 TDD		TRS.1.1 TDD		TRS.1.1 TDD	
	Config 3		TRS.1.2 TDD		TRS.1.2 TDD		TRS.1.2 TDD	
PDSCH Reference measurement channel	Config 1,4		SR.1.1 FDD	-	SR.1.1 FDD	-	SR.1.1 FDD	-
	Config 2		SR.1.1 TDD		SR.1.1 TDD		SR.1.1 TDD	
	Config 3		SR2.1 TDD		SR2.1 TDD		SR2.1 TDD	
RMSI CORESET Reference Channel	Config 1,4		CR.1.1 FDD	-	CR.1.1 FDD	-	CR.1.1 FDD	
	Config 2		CR.1.1 TDD		CR.1.1 TDD		CR.1.1 TDD	
	Config 3		CR2.1 TDD		CR2.1 TDD		CR2.1 TDD	
Dedicated CORESET Reference Channel	Config 1,4		CCR.1.1 FDD	-	CCR.1.1 FDD	-	CCR.1.1 FDD	-
	Config 2		CCR.1.1 TDD		CCR.1.1 TDD		CCR.1.1 TDD	
	Config 3		CCR2.1 TDD		CCR2.1 TDD		CCR2.1 TDD	
OCNG Patterns			OP.1					
SS-RSSI-Measurement			Not Applicable					
Time offset with Cell 1	Config 1,4	ms	-	3	-	3	-	3
	Config 2,3	μs	-	3	-	3	-	3
SMTTC configuration	Config 1,4		SMTTC 2					
	Config 2,3		SMTTC 1					

SSB configuration			Config 1,2,4		SSB.1 FR1						
			Config 3		SSB.1 RedCap FR1						
PDSCH/PDCCH subcarrier spacing			Config 1,2,4	kHz	15						
			Config 3		30						
EPRE ratio of PSS to SSS				dB	0	0	0	0	0	0	
EPRE ratio of PBCH DMRS to SSS											
EPRE ratio of PBCH to PBCH DMRS											
EPRE ratio of PDCCH DMRS to SSS											
EPRE ratio of PDCCH to PDCCH DMRS											
EPRE ratio of PDSCH DMRS to SSS											
EPRE ratio of PDSCH to PDSCH											
EPRE ratio of OCNG DMRS to SSS(Note 1)											
EPRE ratio of OCNG to OCNG DMRS (Note 1)											
N_{oc} Note2	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/15kHz	-88		-108.5	-119.5				
		NR_FDD_FR1_B									-119
		NR_TDD_FR1_C									-118.5
		NR_FDD_FR1_D NR_TDD_FR1_D									-118
		NR_FDD_FR1_E NR_TDD_FR1_E									-117.5
		NR_FDD_FR1_F									-117
		NR_FDD_FR1_G									-116.5
		NR_FDD_FR1_H									-116
		N_{oc} Note2									Config 1,2,4
Config 3	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6		-85		-105.5	-116.5					
	NR_FDD_FR1_B NR_TDD_FR1_C NR_FDD_FR1_D NR_TDD_FR1_D					-116					
	NR_FDD_FR1_E NR_TDD_FR1_E NR_FDD_FR1_F NR_TDD_FR1_F NR_FDD_FR1_G NR_TDD_FR1_G NR_FDD_FR1_H NR_TDD_FR1_H					-115.5					
$\hat{E}_s/I_{ot}$				dB	-1.75	-1.75	20	20	-4.0	-4.0	
$\hat{E}_s/N_{oc}$				dB	-1.75		20		-4.0		
SS-RSRP Note3	Config 1,2,4	NR_FDD_FR1_A NR_TDD_FR1_A NOTE 6	dBm/SCS	-89.75		-88.5	-123.5				
		NR_FDD_FR1_B									-123
		NR_TDD_FR1_C									-122.5
		NR_FDD_FR1_D NR_TDD_FR1_D									-122
		NR_FDD_FR1_E									-121.5

	Config 3	NR_TDD_FR1_E							
		NR_FDD_FR1_F				-121			
		NR_FDD_FR1_G				-120.5			
		NR_FDD_FR1_H				-120			
		NR_FDD_FR1_A				-86.75	-85.5	-120.5	
		NR_TDD_FR1_A							
		NOTE 6							
		NR_FDD_FR1_B							-120
		NR_TDD_FR1_C							-119.5
		NR_FDD_FR1_D							-119
		NR_TDD_FR1_D							
		NR_FDD_FR1_E							
		NR_TDD_FR1_E							-118.5
		NR_FDD_FR1_F							-118
		NR_FDD_FR1_G							-117.5
NR_FDD_FR1_H	-117								
SS-SINR ^{Note3}		NR_FDD_FR1_A	dB	-1.75	20	-4.0			
		NR_TDD_FR1_A							
		NOTE 6							
		NR_FDD_FR1_B							
		NR_TDD_FR1_C							
		NR_FDD_FR1_D							
		NR_TDD_FR1_D							
		NR_FDD_FR1_E							
NR_TDD_FR1_E									
NR_FDD_FR1_F									
NR_FDD_FR1_G									
NR_FDD_FR1_H									
Io ^{Note3}	Config 1,2,4	NR_FDD_FR1_A	dBm/ 9.36MHz	-57.83	-60.5	-90.09			
		NR_TDD_FR1_A							
		NOTE 6							
		NR_FDD_FR1_B					-89.59		
		NR_TDD_FR1_C					-89.09		
		NR_FDD_FR1_D					-88.59		
		NR_TDD_FR1_D							
		NR_FDD_FR1_E							
	NR_TDD_FR1_E	-88.09							
	NR_FDD_FR1_F	-87.59							
	NR_FDD_FR1_G	-87.09							
	NR_FDD_FR1_H	-86.59							
	Config 3	NR_FDD_FR1_A	dBm/ 18.36MHz	-54.87	-57.57	-87.97			
		NR_TDD_FR1_A							
		NOTE 6							
		NR_FDD_FR1_B					-87.47		
NR_TDD_FR1_C		-86.97							
NR_FDD_FR1_D		-86.47							
NR_TDD_FR1_D									
NR_FDD_FR1_E									
NR_TDD_FR1_E	-85.97								
NR_FDD_FR1_F	-85.47								
NR_FDD_FR1_G	-84.97								
NR_FDD_FR1_H	-84.47								
Propagation condition			-	AWGN					
Antenna configuration			-	1x2					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.								
Note 3:	SS-SINR, SS-RSRP, and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								

Note 4:	SS-SINR, SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	NR operating band groups are as defined in clause 3.5.2.
Note 6:	The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.

A.16.7.3.4.3 Test Requirements

The SS-SINR measurement accuracy shall fulfil the requirements in clause 10.1A.12.1.1 and 10.1A.12.1.2.

A.16.7.4 L1-RSRP measurement for beam reporting

A.16.7.4.1 SSB based L1-RSRP measurement for 1 Rx UE

A.16.7.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.5B.3 and clause 10.1A.14.1 for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.16.7.4.1.1-1.

Table A.16.7.4.1.1-1: Applicable NR configurations for FR1 SSB based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.7.4.1.2 Test parameters

In this set of test cases there is one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.7.4.1.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.16.7.4.1.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured with one SSB resource set containing two SSB resources (SSB#0) and 1 (SSB#1). UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSB resources 0.

Table A.16.7.4.1.2-1: FR1 SSB based L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~4		freq1	freq1
Duplex mode	1		FDD	FDD
	2		TDD	TDD
	3		TDD	TDD
	4		HD-FDD	HD-FDD
TDD Configuration	1, 4		N/A	N/A
	2		TDDConf.1.1	TDDConf.1.1
	3		TDDConf.2.1	TDDConf.2.1
BW _{channel}	1, 2, 4	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52
	3		20: N _{RB,c} = 51	20: N _{RB,c} = 51
PDSCH Reference measurement channel	1, 4		SR.1.1 FDD	SR.1.1 FDD
	2		SR.1.1 TDD	SR.1.1 TDD

RMSI CORESET Reference Channel	3		SR.2.1 TDD	SR.2.1 TDD		
	1, 4		CR.1.1 FDD	CR.1.1 FDD		
	2		CR.1.1 TDD	CR.1.1 TDD		
	3		CR.2.1 TDD	CR.2.1 TDD		
Dedicated CORESET Reference Channel	1, 4		CCR.1.1 FDD	CCR.1.1 FDD		
	2		CCR.1.1 TDD	CCR.1.1 TDD		
	3		CCR.2.1 TDD	CCR.2.1 TDD		
SSB configuration	1, 2, 4		SSB.3 FR1	SSB.3 FR1		
	3		SSB.2 RedCap FR1	SSB.2 RedCap FR1		
OCNG Patterns	1~4		OP.1	OP.1		
Initial BWP Configuration	1~4		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1		
TRS configuration	1, 4		TRS.1.1 FDD	TRS.1.1 FDD		
	2		TRS.1.1 TDD	TRS.1.1 TDD		
	3		TRS.1.2 TDD	TRS.1.2 TDD		
Dedicated BWP configuration	1~4		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1		
SMTC configuration	1~4		SMTC.1	SMTC.1		
reportConfigType	1~4		periodic	periodic		
reportQuantity	1~4		ssb-Index-RSRP	ssb-Index-RSRP		
Number of reported RS	1~4		2	2		
L1-RSRP reporting period	1~4		slot80	slot80		
EPRE ratio of PSS to SSS	1~4	dB	0	0		
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
N_{oc} Note2					NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1~4
	NR_FDD_FR1_B	-116.5				
	NR_TDD_FR1_C	-116				
	NR_FDD_FR1_D, NR_TDD_FR1_D	-115.5				
	NR_FDD_FR1_E, NR_TDD_FR1_E	-115				
	NR_FDD_FR1_F	-114.5				
	NR_FDD_FR1_G	-114				
	NR_FDD_FR1_H	-113.5				
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2, 4	dBm/SSB SCS	-94.65	-117	
					NR_FDD_FR1_B	-116.5
					NR_TDD_FR1_C	-116

	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114
	NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-112
	NR_FDD_FR1_F				-111.5
	NR_FDD_FR1_G				-111
	NR_FDD_FR1_H				-110.5
$\hat{E}_s/I_{ot}$		1~4	dB	10	-3
SSB RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2, 4	dBm/SSB SCS	-84.65	-120
	NR_FDD_FR1_B				-119.5
	NR_TDD_FR1_C				-119
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118
	NR_FDD_FR1_F				-117.5
	NR_FDD_FR1_G				-117
	NR_FDD_FR1_H				-116.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-81.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
I _o Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2, 4	dBm/9.36 MHz	-56.28	-87.28
	NR_FDD_FR1_B				-86.78
	NR_TDD_FR1_C				-86.28
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28
	NR_FDD_FR1_F				-84.78
	NR_FDD_FR1_G				-84.28
	NR_FDD_FR1_H				-83.78
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3	dBm/18.36M Hz	-53.36	-84.36

	NR_FDD_FR1_B				-83.86
	NR_TDD_FR1_C				-83.36
	NR_FDD_FR1_D, NR_TDD_FR1_D				-82.86
	NR_FDD_FR1_E, NR_TDD_FR1_E				-82.36
	NR_FDD_FR1_F				-81.86
	NR_FDD_FR1_G				-81.36
	NR_FDD_FR1_H				-80.86
$\hat{E}_s/N_{oc}$	1~4	dB	10		-3
Propagation condition	1~4		AWGN		AWGN
Antenna configuration	1~4		1x1		1x1
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 5: The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification.					

A.16.7.4.1.3 Test Requirements

The L1-RSRP measurement accuracy for SSB resource reported by UE in L1-RSRP report (SSB#0 or SSB#1) of Cell 2 shall fulfil the requirements in clauses 10.1A.14.1.

A.16.7.4.2 SSB based L1-RSRP measurement for 2 Rx UE

A.16.7.4.2.1 Test Purpose and Environment

Test purpose and environment defined in clause A.16.7.4.1.1 apply in this clause.

A.16.7.4.2.2 Test parameters

Test parameters defined in clause A.16.7.4.1.2 apply in this clause except the antenna configuration defined in Table A.16.7.4.2.2-1.

Table A.16.7.4.2.2-1: FR1 SSB based L1-RSRP test parameters

Antenna configuration and Correlation matrix	1~4		1x2 Low	1x2 Low
--	-----	--	---------	---------

A.16.7.4.2.3 Test Requirements

The L1-RSRP measurement accuracy for SSB resource reported by UE in L1-RSRP report (SSB#0 or SSB#1) of Cell 2 shall fulfil the requirements in clauses 10.1A.14.1.

A.16.7.4.3 CSI-RS based L1-RSRP measurement on resource set with repetition off for 1 Rx UE

A.16.7.4.3.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 9.5B.3 and clause 10.1A.14.2 for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.16.7.4.3.1-1.

Table A.16.7.4.3.1-1: Applicable NR configurations for FR1 CSI-RS based L1-RSRP test

Config	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.16.7.4.3.2 Test parameters

In this set of test cases there is one cell in the test, PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.16.7.4.3.2-1 below. The absolute and relative accuracy of L1-RSRP measurements are tested by using the parameters in Table A.16.7.4.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured one CSI-RS resource set containing two CSI-RS resources (CSI-RS#0 or CSI-RS#1). UE is configured to perform RLM and BFD based on SSB 0 and 1. CSI-RS is not transmitted in the same OFDM symbols as SSB.

Table A.16.7.4.3.2-1: FR1 CSI-RS based L1-RSRP test parameters

Parameter	Config	Unit	Test 1	Test 2
SSB GSCN	1~4		freq1	freq1
Duplex mode	1		FDD	FDD
	2, 3		TDD	TDD
	4		HD-FDD	HD-FDD
TDD Configuration	1, 4		N/A	N/A
	2		TDDConf.1.1	TDDConf.1.1
	3		TDDConf.2.1	TDDConf.2.1
BW _{channel}	1, 2, 4	MHz	10: N _{RB,c} = 52	10: N _{RB,c} = 52
	3		20: N _{RB,c} = 51	20: N _{RB,c} = 51
PDSCH Reference measurement channel	1, 4		SR.1.1 FDD	SR.1.1 FDD
	2		SR.1.1 TDD	SR.1.1 TDD
	3		SR.2.1 TDD	SR.2.1 TDD
RMSI CORESET Reference Channel	1, 4		CR.1.1 FDD	CR.1.1 FDD
	2		CR.1.1 TDD	CR.1.1 TDD
	3		CR.2.1 TDD	CR.2.1 TDD
Dedicated CORESET Reference Channel	1, 4		CCR.1.1 FDD	CCR.1.1 FDD
	2		CCR.1.1 TDD	CCR.1.1 TDD
	3		CCR.2.1 TDD	CCR.2.1 TDD
SSB configuration	1, 2, 4		SSB.3 FR1	SSB.3 FR1
	3		SSB.2 RedCap FR1	SSB.2 RedCap FR1
OCNG Patterns	1~4		OP.1	OP.1
TRS configuration	1, 4		TRS.1.1 FDD	TRS.1.1 FDD
	2		TRS.1.1 TDD	TRS.1.1 TDD

		3		TRS.1.2 TDD	TRS.1.2 TDD
Initial BWP Configuration		1~4		DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration		1~4		DLBWP.1.1 ULBWP.1.1	DLBWP.1.1 ULBWP.1.1
SMTC configuration		1~4		SMTC.1	SMTC.1
CSI-RS		1, 4		CSI-RS 1.2 FDD	CSI-RS 1.2 FDD
		2		CSI-RS 1.2 TDD	CSI-RS 1.2 TDD
		3		CSI-RS 2.2 TDD	CSI-RS 2.2 FDD
reportConfigType		1~4		periodic	periodic
reportQuantity		1~4		cri-RSRP	cri-RSRP
Number of reported RS		1~4		2	2
L1-RSRP reporting period		1~4		slot80	slot80
EPRE ratio of PSS to SSS		1~4	dB	0	0
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5				
	NR_FDD_FR1_B	-116.5			
	NR_TDD_FR1_C	-116			
	NR_FDD_FR1_D, NR_TDD_FR1_D	-115.5			
	NR_FDD_FR1_E, NR_TDD_FR1_E	-115			
	NR_FDD_FR1_F	-114.5			
	NR_FDD_FR1_G	-114			
	NR_FDD_FR1_H	-113.5			
N_{oc} Note2	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2, 4	dBm/CSI-RS SCS	-94.65	-117
	NR_FDD_FR1_B				-116.5
	NR_TDD_FR1_C				-116
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115
	NR_FDD_FR1_F				-114.5
	NR_FDD_FR1_G				-114
	NR_FDD_FR1_H				-113.5
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-91.65	-114
	NR_FDD_FR1_B				-113.5
	NR_TDD_FR1_C				-114

		NR_FDD_FR1_D, NR_TDD_FR1_D				-112.5
		NR_FDD_FR1_E, NR_TDD_FR1_E				-112
		NR_FDD_FR1_F				-111.5
		NR_FDD_FR1_G				-111
		NR_FDD_FR1_H				-110.5
$\hat{E}_s/I_{ot}$			1~4	dB	10	-3
CSI-RS RSRP Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2, 4	dBm/CSI-RS SCS	-84.65	-120	
	NR_FDD_FR1_B				-119.5	
	NR_TDD_FR1_C				-119	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-118.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-118	
	NR_FDD_FR1_F				-117.5	
	NR_FDD_FR1_G				-117	
	NR_FDD_FR1_H				-116.5	
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		-81.65	-117	
	NR_FDD_FR1_B				-116.5	
	NR_TDD_FR1_C				-116	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-115.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-115	
	NR_FDD_FR1_F				-114.5	
	NR_FDD_FR1_G				-114	
	NR_FDD_FR1_H				-113.5	
Io Note3	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	1,2, 4	dBm/9.36 MHz	-56.28	-87.28	
	NR_FDD_FR1_B				-86.78	
	NR_TDD_FR1_C				-86.28	
	NR_FDD_FR1_D, NR_TDD_FR1_D				-85.78	
	NR_FDD_FR1_E, NR_TDD_FR1_E				-85.28	
	NR_FDD_FR1_F				-84.78	
	NR_FDD_FR1_G				-84.28	
	NR_FDD_FR1_H				-83.78	
	NR_FDD_FR1_A, NR_TDD_FR1_A NOTE 5	3		dBm/18.36 MHz	-53.36	-84.36
	NR_FDD_FR1_B					-83.86
	NR_TDD_FR1_C					-83.36
	NR_FDD_FR1_D, NR_TDD_FR1_D					-82.86
	NR_FDD_FR1_E, NR_TDD_FR1_E					-82.36
	NR_FDD_FR1_F					-81.86
	NR_FDD_FR1_G					-81.36
	NR_FDD_FR1_H					-80.86
$\hat{E}_s/N_{oc}$			1~4	dB	10	-3
Propagation condition			1~4		AWGN	AWGN
Antenna configuration			1~4		1x1	1x1

- | | |
|---------|--|
| Note 1: | OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. |
| Note 2: | Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. |
| Note 3: | RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. |
| Note 4: | RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. |
| Note 5: | The test configuration excludes support for band n51 and it is not required to run this test on band n51 in this release of the specification. |

A.16.7.4.3.3 Test Requirements

The L1-RSRP measurement accuracy for CSI-RS resource reported by UE in L1-RSRP report (CSI-RS#0 or CSI-RS#1) of Cell 1 shall fulfil the requirements in clause 10.1A.14.2.

A.16.7.4.4 CSI-RS based L1-RSRP measurement on resource set with repetition off for 2 Rx UE

A.16.7.4.4.1 Test Purpose and Environment

Test purpose and environment defined in clause A.16.7.4.3.1 apply in this clause.

A.16.7.4.4.2 Test parameters

Test parameters defined in clause A.16.7.4.3.2 apply in this clause except the antenna configuration defined in Table A.16.7.4.2.2-1.

Table A.16.7.4.2.2-1: FR1 SSB based L1-RSRP test parameters

Antenna configuration and Correlation matrix	1~4		1x2 Low	1x2 Low
--	-----	--	---------	---------

A.16.7.4.4.3 Test Requirements

The L1-RSRP measurement accuracy for CSI-RS resource reported by UE in L1-RSRP report (CSI-RS#0 or CSI-RS#1) of Cell 1 shall fulfil the requirements in clause 10.1A.14.2.

A.16.7.5 E-UTRAN RSRP

A.16.7.5.1 SA: inter-RAT measurement accuracy with FR1 serving cell for 1 Rx UE

A.16.7.5.1.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.2A.2 for SA inter-RAT E-UTRAN RSRP measurements.

A.16.7.5.1.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.16.7.5.1.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RSRP are tested by using the parameters in A.16.7.5.1.2-2 and A.16.7.5.1.2-3.

Table A.16.7.5.1.2-1: Inter-RAT E-UTRAN RSRP supported test configurations with FR1 serving cell

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.7.5.1.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RSRP test parameters

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
	Config 7, 8		HD-FDD
TDD Configuration	Config 1, 4, 7, 8		N/A
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
BW _{channel}	Config 1, 4, 7, 8	MHz	10: N _{RB,C} = 52 (FDD)
	Config 2, 5		10: N _{RB,C} = 52 (TDD)
	Config 3, 6		20: N _{RB,C} = 51 (TDD)
Gap pattern Id			0
PDSCH reference measurement channel	Config 1, 4, 7, 8		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD
	Config 3, 6		SR.2.1 TDD
RMSI CORSET reference channel	Config 1, 4, 7, 8		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORSET reference channel	Config 1, 4, 7, 8		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1, 4, 7, 8		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
BWP configurations	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
OCNG pattern ^{Note1}			OP.1
SMTTC configuration			SMTTC.1

SSB configuration	Config 1, 2, 4, 5,7,8		SSB.1 FR1
	Config 3, 6		SSB.1 RedCap FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc}^{Note2}		dBm/15 kHz	-104
N_{oc}^{Note2}	Config 1, 2, 4, 5,7,8	dBm/SCS	-104
	Config 3, 6		-101
$\hat{E}_s/N_{oc}$		dB	17
$\hat{E}_s/I_{ot}^{Note3}$		dB	17
SS-RSRP ^{Note3}	Config 1, 2, 4, 5,7,8	dBm/SCS	-87
	Config 3, 6		-84
SSB_RP ^{Note3}	Config 1, 2, 4, 5,7,8	dBm/SCS	-87
	Config 3, 6		-84
I_o^{Note3}	Config 1, 2, 4, 5,7,8	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/18.36 MHz	-56.03
Propagation condition			AWGN
Antenna Configuration			1x1
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.16.7.5.1.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RSRP test parameters

Parameter		Unit	Cell 2	
			Test 1	Test 2
E-UTRA RF channel number			2	
Duplex mode	Config 1, 2, 3, 7		FDD	
	Config 4, 5, 6, 8		TDD	
TDD special subframe configuration ^{Note1}	Config 1, 2, 3, 7		N/A	
	Config 4, 5, 6, 8		6	
TDD uplink-downlink configuration ^{Note1}	Config 1, 2, 3, 7		N/A	
	Config 4, 5, 6, 8		1	
BW _{channel}		MHz	5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}			-	
PCFICH/PDCCH/PHICH parameters:	Config 1, 2, 3, 7		5 MHz: R.11 FDD 10 MHz: R.6 FDD	

DL Reference Measurement Channel ^{Note2}			20 MHz: R.10 FDD	
	Config 4, 5, 6, 8		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}	Config 1, 2, 3, 7		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD	
	Config 4, 5, 6, 8		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD	
PBCH_RA		dB	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N_{oc} ^{Note4}	Bands FDD_A ^{Note 9} , TDD_A	dBm/15kHz	-91.65	-117
	Bands FDD_B1, FDD_B2 ^{Note 10}			-116.5
	Bands FDD_C, TDD_C			-116
	Bands FDD_D			-115.5
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E			-115
	Bands FDD_G ^{Note 8}			-114
	Bands FDD_H			-113.5
$\hat{E}_s/N_{oc}$		dB	10	-4
$\hat{E}_s/I_{ot}$ ^{Note5}		dB	10	-4
RSRP ^{Note5}	Bands FDD_A ^{Note 9} , TDD_A	dBm/15kHz	-81.65	-121
	Bands FDD_B1, FDD_B2 ^{Note 10}			-120.5
	Bands FDD_C, TDD_C			-120
	Bands FDD_D			-119.5
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E			-119
	Bands FDD_G ^{Note 8}			-118
	Bands FDD_H			-117.5
SCH_RP ^{Note5}	Bands FDD_A ^{Note 9} , TDD_A	dBm/15kHz	-81.65	-121
	Bands FDD_B1, FDD_B2 ^{Note 10}			-120.5
	Bands FDD_C, TDD_C			-120
	Bands FDD_D			-119.5
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E			-119
	Bands FDD_G ^{Note 8}			-118
	Bands FDD_H			-117.5
I_o ^{Note5}	Bands FDD_A ^{Note 9} , TDD_A	dBm/Ch BW	$-53.45 + 10\log(N_{RB,c}/50)$	$-87.76 + 10\log(N_{RB,c}/50)$

	Bands FDD_B1, FDD_B2 Note 10		-87.26 + 10log(N _{RB,c} /50)
	Bands FDD_C, TDD_C		-86.76 + 10log(N _{RB,c} /50)
	Bands FDD_D		-86.26 + 10log(N _{RB,c} /50)
	Bands FDD_E, FDD_F Note 7 , TDD_E		-85.76 + 10log(N _{RB,c} /50)
	Bands FDD_G Note 8		-84.76 + 10log(N _{RB,c} /50)
	Bands FDD_H		-84.26 + 10log(N _{RB,c} /50)
Propagation Condition			AWGN
Antenna Configuration			1x1
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].		
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.		
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.		
Note 5:	Ê _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 6:	E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].		
Note 7:	For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.		
Note 8:	Except Band 29.		
Note 9:	Except Band 32, Band 75 and Band 76.		
Note 10:	For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.		

A.16.7.5.1.3 Test Requirements

The SA inter-RAT E-UTRAN RSRP measurement accuracy for cell 2 shall fulfil absolute requirement in clause 9.4A.2 and 9.4A.3.

A.16.7.5.2 SA: inter-RAT measurement accuracy with FR1 serving cell for 2 Rx UE

A.16.7.5.2.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.2A.2 for SA inter-RAT E-UTRAN RSRP measurements.

A.16.7.5.2.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.16.7.5.2.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RSRP are tested by using the parameters in A.16.7.5.2.2-2 and A.16.7.5.2.2-3.

Table A.16.7.5.2.2-1: Inter-RAT E-UTRAN RSRP supported test configurations with FR1 serving cell

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD

6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.7.5.2.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RSRP test parameters

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
	Config 7,8		HD-FDD
TDD Configuration	Config 1, 4, 7, 8		N/A
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
BW _{channel}	Config 1, 4, 7, 8	MHz	10: N _{RB,c} = 52 (FDD)
	Config 2, 5		10: N _{RB,c} = 52 (TDD)
	Config 3, 6		20: N _{RB,c} = 51 (TDD)
Gap pattern Id			0
PDSCH reference measurement channel	Config 1, 4, 7, 8		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD
	Config 3, 6		SR.2.1 TDD
RMSI CORSET reference channel	Config 1, 4,7,8		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORSET reference channel	Config 1, 4, 7, 8		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1, 4, 7, 8		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
BWP configurations	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
OCNG pattern ^{Note1}			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1, 2, 4, 5,7,8		SSB.1 FR1
	Config 3, 6		SSB.1 RedCap FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N _{oc} ^{Note2}		dBm/15 kHz	-104
N _{oc} ^{Note2}	Config 1, 2, 4, 5,7,8	dBm/SCS	-104
	Config 3, 6		-101
Ê _s /N _{oc}		dB	17

$\hat{E}_s/I_{ot}$ ^{Note3}		dB	17
SS-RSRP ^{Note3}	Config 1, 2, 4, 5,7,8	dBm/SCS	-87
	Config 3, 6		-84
SSB_RP ^{Note3}	Config 1, 2, 4, 5,7,8	dBm/SCS	-87
	Config 3, 6		-84
I_o ^{Note3}	Config 1, 2, 4, 5,7,8	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/18.36 MHz	-56.03
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.16.7.5.2.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RSRP test parameters

Parameter		Unit	Cell 2	
			Test 1	Test 2
E-UTRA RF channel number			2	
Duplex mode	Config 1, 2, 3, 7		FDD	
	Config 4, 5, 6, 8		TDD	
TDD special subframe configuration ^{Note1}	Config 1, 2, 3, 7		N/A	
	Config 4, 5, 6, 8		6	
TDD uplink-downlink configuration ^{Note1}	Config 1, 2, 3, 7		N/A	
	Config 4, 5, 6, 8		1	
BW _{channel}		MHz	5 MHz: $N_{RB,c} = 25$ 10 MHz: $N_{RB,c} = 50$ 20 MHz: $N_{RB,c} = 100$	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}			-	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}	Config 1, 2, 3, 7		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
	Config 4, 5, 6, 8		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}	Config 1, 2, 3, 7		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD	
	Config 4, 5, 6, 8		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD	
PBCH_RA		dB	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				

PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	Bands FDD_A ^{Note 9} , TDD_A	dBm/15kHz	-91.65	-117
	Bands FDD_B1, FDD_B2 ^{Note 10}			-116.5
	Bands FDD_C, TDD_C			-116
	Bands FDD_D			-115.5
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E			-115
	Bands FDD_G ^{Note 8}			-114
	Bands FDD_H			-113.5
Ē _s /N _{oc}		dB	10	-4
Ē _s /I _{ot} ^{Note5}		dB	10	-4
RSRP ^{Note5}	Bands FDD_A ^{Note 9} , TDD_A	dBm/15kHz	-81.65	-121
	Bands FDD_B1, FDD_B2 ^{Note 10}			-120.5
	Bands FDD_C, TDD_C			-120
	Bands FDD_D			-119.5
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E			-119
	Bands FDD_G ^{Note 8}			-118
	Bands FDD_H			-117.5
SCH_RP ^{Note5}	Bands FDD_A ^{Note 9} , TDD_A	dBm/15kHz	-81.65	-121
	Bands FDD_B1, FDD_B2 ^{Note 10}			-120.5
	Bands FDD_C, TDD_C			-120
	Bands FDD_D			-119.5
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E			-119
	Bands FDD_G ^{Note 8}			-118
	Bands FDD_H			-117.5
I ₀ ^{Note5}	Bands FDD_A ^{Note 9} , TDD_A	dBm/Ch BW	-53.45 + 10log(N _{RB,c} /50)	-87.76 + 10log(N _{RB,c} /50)
	Bands FDD_B1, FDD_B2 ^{Note 10}			-87.26 + 10log(N _{RB,c} /50)
	Bands FDD_C, TDD_C			-86.76 + 10log(N _{RB,c} /50)
	Bands FDD_D			-86.26 + 10log(N _{RB,c} /50)
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E			-85.76 + 10log(N _{RB,c} /50)
	Bands FDD_G ^{Note 8}			-84.76 + 10log(N _{RB,c} /50)
	Bands FDD_H			-84.26 + 10log(N _{RB,c} /50)
Propagation Condition			AWGN	
Antenna Configuration and Correlation Matrix			1x2	
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].			
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.			
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 5:	$\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 6:	E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].
Note 7:	For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.
Note 8:	Except Band 29.
Note 9:	Except Band 32, Band 75 and Band 76.
Note 10:	For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.

A.16.7.5.2.3 Test Requirements

The SA inter-RAT E-UTRAN RSRP measurement accuracy for cell 2 shall fulfil absolute requirement in clause 9.4A.2 and 9.4A.3.

A.16.7.6 E-UTRAN RSRQ

A.16.7.6.1 SA: inter-RAT measurement accuracy with FR1 serving cell for 1 Rx UE

A.16.7.6.1.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.2A.3 for SA inter-RAT E-UTRAN RSRQ measurements.

A.16.7.6.1.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.16.7.6.1.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RSRQ are tested by using the parameters in A.16.7.6.1.2-2 and A.16.7.6.1.2-3.

Table A.16.7.6.1.2-1: Inter-RAT E-UTRAN RSRQ supported test configurations with FR1 serving cell

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, E-UTRAN FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.7.6.1.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RSRQ test parameters

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
	Config 7, 8		HD-FDD
TDD Configuration	Config 1, 4, 7, 8		N/A

	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
BW _{channel}	Config 1, 4, 7, 8	MHz	10: N _{RB,c} = 52 (FDD)
	Config 2, 5		10: N _{RB,c} = 52 (TDD)
	Config 3, 6		20: N _{RB,c} = 51 (TDD)
Gap pattern Id			0
PDSCH reference measurement channel	Config 1, 4, 7, 8		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD
	Config 3, 6		SR.2.1 TDD
RMSI CORSET reference channel	Config 1, 4, 7, 8		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
Dedicated CORSET reference channel	Config 1, 4, 7, 8		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
	Config 3, 6		CCR.2.1 TDD
CSI-RS for tracking	Config 1, 4, 7, 8		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
	Config 3, 6		TRS.1.2 TDD
BWP configurations	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
OCNG pattern ^{Note1}			OP.1
SMTc configuration			SMTc.1
SSB configuration	Config 1, 2, 4, 5, 7, 8		SSB.1 FR1
	Config 3, 6		SSB.1 RedCap FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N _{oc} ^{Note2}		dBm/15 kHz	-104
N _{oc} ^{Note2}	Config 1, 2, 4, 5, 7, 8	dBm/SCS	-104
	Config 3, 6		-101
$\hat{E}_s/N_{oc}$		dB	17
$\hat{E}_s/I_{ot}$ ^{Note3}		dB	17
SS-RSRP ^{Note3}	Config 1, 2, 4, 5, 7, 8	dBm/SCS	-87
	Config 3, 6		-84
SSB_RP ^{Note3}	Config 1, 2, 4, 5, 7, 8	dBm/SCS	-87
	Config 3, 6		-84
I _o ^{Note3}	Config 1, 2, 4, 5, 7, 8	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/18.36 MHz	-56.03
Propagation condition			AWGN
Antenna Configuration			1x1
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3: $\hat{E}_s/I_{ot}$, SS-RSRQ, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Table A.16.7.6.1.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RSRQ test parameters

Parameter		Unit	Cell 2		
			Test 1	Test 2	Test 3
E-UTRA RF channel number				2	
Duplex mode	Config 1, 2, 3, 7			FDD	
	Config 4, 5, 6, 8			TDD	
TDD special subframe configuration ^{Note1}	Config 1, 2, 3, 7			N/A	
	Config 4, 5, 6, 8			6	
TDD uplink-downlink configuration ^{Note1}	Config 1, 2, 3, 7			N/A	
	Config 4, 5, 6, 8			1	
BW _{channel}		MHz	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100		
PDSCH parameters: DL Reference Measurement Channel ^{Note2}			-		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}	Config 1, 2, 3, 7		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
	Config 4, 5, 6, 8		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns ^{Note2}	Config 1, 2, 3, 7		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD		
	Config 4, 5, 6, 8		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD		
PBCH_RA		dB	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note3}					
OCNG_RB ^{Note3}					
N _{oc} ^{Note4}	Bands FDD_A ^{Note 9} , TDD_A	dBm/15kHz	-83	-104.70	-119.5
	Bands FDD_B1, FDD_B2 ^{Note 10}				-119
	Bands FDD_C, TDD_C				-118.5
	Bands FDD_D				-118

		Bands FDD_E, FDD_F Note 7, TDD_E				-117.5
		Bands FDD_G Note 8				-116.5
		Bands FDD_H				-116
$\hat{E}_s/N_{oc}$			dB	-1.75	-4.0	-4.0
$\hat{E}_s/I_{ot}$ Note 5			dB	-1.75	-4.0	-4.0
RSRP Note 5	Bands FDD_A Note 9, TDD_A	dBm/15kHz	-84.75	-108.70		-123.5
	Bands FDD_B1, FDD_B2 Note 10					-123
	Bands FDD_C, TDD_C					-122.5
	Bands FDD_D					-122
	Bands FDD_E, FDD_F Note 7, TDD_E					-121.5
	Bands FDD_G Note 8					-120.5
	Bands FDD_H					-120
RSRQ Note 5	Bands FDD_A Note 9, TDD_A	dB	-14.76	-16.25		-16.25
	Bands FDD_B1, FDD_B2 Note 10					
	Bands FDD_C, TDD_C					
	Bands FDD_D					
	Bands FDD_E, FDD_F Note 7, TDD_E					
	Bands FDD_G Note 8					
	Bands FDD_H					
I _o Note 5	Bands FDD_A Note 9, TDD_A	dBm/Ch BW	-53 + 10log(N _{RB,c} /50)	-75.46 + 10log(N _{RB,c} /50)		-90.26 + 10log(N _{RB,c} /50)
	Bands FDD_B1, FDD_B2 Note 10					-89.76 + 10log(N _{RB,c} /50)
	Bands FDD_C, TDD_C					-89.26 + 10log(N _{RB,c} /50)
	Bands FDD_D					-88.76 + 10log(N _{RB,c} /50)
	Bands FDD_E, FDD_F Note 7, TDD_E					-88.26 + 10log(N _{RB,c} /50)
	Bands FDD_G Note 8					-87.26 + 10log(N _{RB,c} /50)
	Bands FDD_H					-86.76 + 10log(N _{RB,c} /50)
Propagation Condition				AWGN		
Antenna Configuration				1x1		
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].					
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.					
Note 3:	OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.					
Note 5:	$\hat{E}_s/I_{ot}$, RSRP, RSRQ and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 6:	E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].					
Note 7:	For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.					

Note 8:	Except Band 29.
Note 9:	Except Band 32, Band 75 and Band 76.
Note 10:	For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.

A.16.7.6.1.3 Test Requirements

The SA inter-RAT E-UTRAN RSRQ measurement accuracy for cell 2 shall fulfil absolute requirement in clause 10.2A.3.

A.16.7.6.2 SA: inter-RAT measurement accuracy with FR1 serving cell for 2 Rx UE

A.16.7.6.2.1 Test Purpose and Environment

The purpose of this test is to verify that the E-UTRAN RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.2A.3 for SA inter-RAT E-UTRAN RSRQ measurements.

A.16.7.6.2.2 Test parameters

In each test there are two cells: Cell 1 and Cell 2. Cell 1 is the NR PCell and Cell 2 is an E-UTRAN inter-RAT neighbour cell. Supported test configurations are shown in table A.16.7.6.2.2-1. The measurement accuracy of SA inter-RAT E-UTRAN RSRQ are tested by using the parameters in A.16.7.6.2.2.2-2 and A.16.7.6.2.2-3.

Table A.16.7.6.2.2-1: Inter-RAT E-UTRAN RSRQ supported test configurations with FR1 serving cell

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, E-UTRAN TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
6	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, E-UTRAN TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode. E-UTRAN TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.16.7.6.2.2-2: NR Cell specific test parameters for SA Inter-RAT E-UTRAN RSRQ test parameters

Parameter		Unit	Cell 1
NR RF channel number			1
Duplex mode	Config 1, 4		FDD
	Config 2, 3, 5, 6		TDD
	Config 7, 8		HD-FDD
TDD Configuration	Config 1, 4, 7, 8		N/A
	Config 2, 5		TDDConf.1.1
	Config 3, 6		TDDConf.2.1
BW _{channel}	Config 1, 4, 7, 8	MHz	10: N _{RB,c} = 52 (FDD)
	Config 2, 5		10: N _{RB,c} = 52 (TDD)
	Config 3, 6		20: N _{RB,c} = 51 (TDD)
Gap pattern Id			0
PDSCH reference measurement channel	Config 1, 4, 7, 8		SR.1.1 FDD
	Config 2, 5		SR.1.1 TDD

RMSI CORSET reference channel	Config 3, 6		SR.2.1 TDD
	Config 1, 4, 7, 8		CR.1.1 FDD
	Config 2, 5		CR.1.1 TDD
	Config 3, 6		CR.2.1 TDD
	Config 1, 4, 7, 8		CCR.1.1 FDD
	Config 2, 5		CCR.1.1 TDD
Dedicated CORSET reference channel	Config 3, 6		CCR.2.1 TDD
	Config 1, 4, 7, 8		TRS.1.1 FDD
	Config 2, 5		TRS.1.1 TDD
CSI-RS for tracking	Config 3, 6		TRS.1.2 TDD
	Initial DL BWP		DLBWP.0.1
	Dedicated DL BWP		DLBWP.1.1
BWP configurations	Initial UL BWP		ULBWP.0.1
	Dedicated UL BWP		ULBWP.1.1
OCNG pattern ^{Note1}			OP.1
SMTC configuration			SMTC.1
SSB configuration	Config 1, 2, 4, 5, 7, 8		SSB.1 FR1
	Config 3, 6		SSB.1 RedCap FR1
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH_DMRS to SSS			
EPRE ratio of PBCH to PBCH_DMRS			
EPRE ratio of PDCCH_DMRS to SSS			
EPRE ratio of PDCCH to PDCCH_DMRS			
EPRE ratio of PDSCH_DMRS to SSS			
EPRE ratio of PDSCH to PDSCH_DMRS			
EPRE ratio of OCNG DMRS to SSS			
EPRE ratio of OCNG to OCNG DMRS			
N_{oc} ^{Note2}		dBm/15 kHz	-104
N_{oc} ^{Note2}	Config 1, 2, 4, 5, 7, 8	dBm/SCS	-104
	Config 3, 6		-101
$\hat{E}_s/N_{oc}$		dB	17
$\hat{E}_s/I_{ot}$ ^{Note3}		dB	17
SS-RSRP ^{Note3}	Config 1, 2, 4, 5, 7, 8	dBm/SCS	-87
	Config 3, 6		-84
SSB_RP ^{Note3}	Config 1, 2, 4, 5, 7, 8	dBm/SCS	-87
	Config 3, 6		-84
I_o ^{Note3}	Config 1, 2, 4, 5, 7, 8	dBm/9.36 MHz	-58.96
	Config 3, 6	dBm/18.36 MHz	-56.03
Propagation condition			AWGN
Antenna Configuration and Correlation Matrix			1x2 Low
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRQ, SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

Table A.16.7.6.2.2-3: E-UTRAN Cell specific test parameters for SA Inter-RAT E-UTRAN RSRQ test parameters

Parameter		Unit	Cell 2		
			Test 1	Test 2	Test 3
E-UTRA RF channel number			2		
Duplex mode	Config 1, 2, 3, 7		FDD		
	Config 4, 5, 6, 8		TDD		
TDD special subframe configuration ^{Note1}	Config 1, 2, 3, 7		N/A		
	Config 4, 5, 6, 8		6		
TDD uplink-downlink configuration ^{Note1}	Config 1, 2, 3, 7		N/A		
	Config 4, 5, 6, 8		1		
BW _{channel}		MHz	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100		
PDSCH parameters: DL Reference Measurement Channel ^{Note2}			-		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}	Config 1, 2, 3, 7		5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
	Config 4, 5, 6, 8		5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns ^{Note2}	Config 1, 2, 3, 7		5 MHz: OP.19 FDD 10 MHz: OP.6 FDD 20 MHz: OP.14 FDD		
	Config 4, 5, 6, 8		5 MHz: OP.10 TDD 10 MHz: OP.2 TDD 20 MHz: OP.8 TDD		
PBCH_RA		dB	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note3}					
OCNG_RB ^{Note3}					
N _{oc} ^{Note4}	Bands FDD_A ^{Note 9} , TDD_A	dBm/15kHz	-83	-104.70	-119.5
	Bands FDD_B1, FDD_B2 ^{Note 10}				-119
	Bands FDD_C, TDD_C				-118.5
	Bands FDD_D				-118
	Bands FDD_E, FDD_F ^{Note 7} , TDD_E				-117.5
	Bands FDD_G ^{Note 8}				-116.5
	Bands FDD_H				-116
$\hat{E}_s/N_{oc}$		dB	-1.75	-4.0	-4.0
$\hat{E}_s/I_{ot}$ ^{Note5}		dB	-1.75	-4.0	-4.0
RSRP ^{Note5}	Bands FDD_A ^{Note 9} , TDD_A	dBm/15kHz	-84.75	-108.70	-123.5

	Bands FDD_B1, FDD_B2 Note 10				-123
	Bands FDD_C, TDD_C				-122.5
	Bands FDD_D				-122
	Bands FDD_E, FDD_F Note 7 , TDD_E				-121.5
	Bands FDD_G Note 8				-120.5
	Bands FDD_H				-120
RSRQ Note 5	Bands FDD_A Note 9 , TDD_A	dB	-14.76	-16.25	-16.25
	Bands FDD_B1, FDD_B2 Note 10				
	Bands FDD_C, TDD_C				
	Bands FDD_D				
	Bands FDD_E, FDD_F Note 7 , TDD_E				
	Bands FDD_G Note 8				
	Bands FDD_H				
Io Note 5	Bands FDD_A Note 9 , TDD_A	dBm/Ch BW	-53 + 10log(N _{RB,c} /50)	-75.46 + 10log(N _{RB,c} /50)	-90.26 + 10log(N _{RB,c} /50)
	Bands FDD_B1, FDD_B2 Note 10				-89.76 + 10log(N _{RB,c} /50)
	Bands FDD_C, TDD_C				-89.26 + 10log(N _{RB,c} /50)
	Bands FDD_D				-88.76 + 10log(N _{RB,c} /50)
	Bands FDD_E, FDD_F Note 7 , TDD_E				-88.26 + 10log(N _{RB,c} /50)
	Bands FDD_G Note 8				-87.26 + 10log(N _{RB,c} /50)
	Bands FDD_H				-86.76 + 10log(N _{RB,c} /50)
Propagation Condition			AWGN		
Antenna Configuration and Correlation Matrix			1x2 Low		
Note 1:	Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2:	DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3:	OCNG shall be used such that all cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5:	Ê _s /I _{ot} , RSRP, RSRQ and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6:	E-UTRA operating band groups are as defined in clause 3.5 of TS 36.133 [15].				
Note 7:	For Band 26, the tests shall be performed with the carrier frequency of assigned E-UTRA channel bandwidth within 865-894 MHz.				
Note 8:	Except Band 29.				
Note 9:	Except Band 32, Band 75 and Band 76.				
Note 10:	For Band 74, the tests shall be performed with the carrier frequency of the assigned E-UTRA channel bandwidth within 1475.9-1510.9 MHz.				

A.16.7.6.2.3 Test Requirements

The SA inter-RAT E-UTRAN RSRQ measurement accuracy for cell 2 shall fulfil absolute requirement in clause 10.2A.3.

A.17 NR standalone tests with one or more NR cells in FR2 for RedCap

A.17.1 SA: RRC_IDLE state mobility for RedCap

A.17.1.1 Cell re-selection to NR

A.17.1.1.1 Cell reselection to FR2 intra-frequency NR case for 2 Rx

A.17.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements specified in clause 4.2B.2.3.

A.17.1.1.1.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.17.1.1.1.2-1, A.17.1.1.1.2-2 and A.17.1.1.1.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Only cell 1 is already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.17.1.1.1.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.17.1.1.1.2-2: General test parameters for RedCap UE intra frequency NR cell re-selection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	
	Neighbour cell		1, 2	Cell2	
T2 end condition	Active cell		1, 2	Cell1	
	Neighbour cell		1, 2	Cell2	
Final condition	Active cell		1, 2	Cell1	
	Neighbour cell		1, 2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 μ s	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.1	
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	

T1	s	1, 2	>7	During T1, Cell 2 shall be powered off, and during the off time the physical cell identity shall be changed, the intention is to ensure that Cell 2 has not been detected by the UE prior to the start of period T2
T2	s	1, 2	135	T2 needs to be defined so that cell re-selection reaction time is taken into account.
T3	s	1, 2	35	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.17.1.1.1.2-3: Cell specific test parameters for RedCap UE intra frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			SR.3.1 TDD		
		2	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
		2	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
		2	CCR.3.1 TDD			CCR.3.1 TDD		
SSB configuration		1	SSB.3 FR2			SSB.7 FR2		
		2	SSB.4 FR2			SSB.8 FR2		
OCNG Pattern		1, 2	OP.4			OP.4		
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66			100: N _{RB,c} = 66		
Data RBs allocated		1, 2	66			66		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Q _{rxlevmin}	dBm/SCS	1	-138			-138		
		2	-135			-135		
P _{compensation}	dB	1, 2	0			0		
Q _{hyst_s}	dB	1, 2	0			0		
Q _{offset_{s, n}}	dB	1, 2	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		
AoA setup		1, 2	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
Beam assumption ^{Note 4}		1,2	Rough			Rough		
$\hat{E}_s / I_{ot\ BB}$ ^{Note 5}	dB	1, 2	7.45	-3.55	0.95	-infinity	0.95	-3.55
N_{oc} ^{Note2}	dBm/SCS	1	-93					
		2	-90					
N_{oc} ^{Note2}	dBm/15 kHz	1, 2	-102					
$\hat{E}_s / N_{oc}$	dB	1, 2	8	-3	1.5	-infinity	1.5	-3

SSB_RP ^{Note3}	dBm/SCS	1	-85	-96	-91.5	-infinity	-91.5	-96
		2	-82	-93	-88.5	-infinity	-88.5	-93
Io on SSB symbols of each cell	dBm/95.04 MHz	1	-60.53	-67.40	-65.34	-69.17	-65.34	-67.40
		2	-57.52	-64.39	-62.33	-66.16	-62.33	-64.39
Treselection	s	1, 2	0	0	0	0	0	0
SintrasearchP	dB	1, 2	50			50		
Propagation Condition		1, 2	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SSB_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation							
Note 5:	Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.							

A.17.1.1.1.3 Test Requirements

The cell reselection delay to a newly detectable cell is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on Cell 2.

The cell re-selection delay to a newly detectable cell shall be less than 130 s.

The cell reselection delay to an already detected cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 1 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to an already detected cell shall be less than 27 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a newly detectable cell can be expressed as: $T_{\text{detect, NR_Intra}} + T_{\text{SI-NR}}$, and to an already detected cell can be expressed as: $T_{\text{evaluate, NR_intra}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{detect, NR_Intra}}$ See Table 4.2B.2.3-1 in clause 4.2B.2.3

$T_{\text{evaluate, NR_intra}}$ See Table 4.2B.2.3-1 in clause 4.2B.2.3

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 129.28 s, allow 130 s for the cell re-selection delay to a newly detectable cell and 26.88 s for the cell re-selection delay to an already detected cell in the test case, which we allow 27 s.

A.17.1.1.2 Cell reselection to FR2 inter-frequency NR case

A.17.1.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements specified in clause 4.2B.2.4.

A.17.1.1.2.2 Test Parameters

The test scenario comprises of 2 cells on 2 different NR carriers respectively as given in tables A.17.1.1.2.2-1, A.17.1.1.2.2-2 and A.17.1.1.2.2-3. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas and cell 2 is of higher priority than cell 1. Furthermore, UE has not registered with network for the tracking area containing cell 2.

Table A.17.1.1.2.2-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.17.1.1.2.2-2: General test parameters for RedCap UE FR2 inter frequency NR cell reselection test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell 2 in the initial phase and during T1 period the UE reselects to cell 1
	Neighbour cell		1, 2	Cell1	
T1 end condition	Active cell		1, 2	Cell1	The UE shall perform reselection to cell 1 during T1
	Neighbour cells		1, 2	Cell2	
T3 end condition	Active cell		1, 2	Cell2	The UE shall perform reselection to cell 2 with higher priority during T3
	Neighbour cell		1, 2	Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 μ s	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.1 FR2	
			2	SSB.2 FR2	
SMTC configuration			1, 2	SMTC.1	
DRX cycle length		s	1, 2	1.28	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	35	T1 needs to be defined so that cell reselection reaction time is taken into account.

T2	s	1, 2	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2	95	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.17.1.1.2.2-3: Cell specific test parameters for RedCap UE FR2 inter frequency NR cell re-selection test case in AWGN

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
TDD configuration		1, 2	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1, 2	SR.3.1 TDD			SR.3.1 TDD		
RMSI CORESET parameters		1, 2	CR.3.1 TDD			CR.3.1 TDD		
RMSI CORESET RMC configuration		1, 2	CCR.3.1 TDD			CCR.3.1 TDD		
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1, 2	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1, 2	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1, 2	SSB			SSB		
Qrxlevmin	dBm/SCS	1	-140			-140		
		2	-137			-137		
Pcompensation	dB	1, 2	0			0		
Qhyst _s	dB	1, 2	0			0		
Qoffset _{s, n}	dB	1, 2	0			0		
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP			SS-RSRP		
AoA setup		1, 2	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
Beam assumption ^{Note 4}		1,2	Rough			Rough		
$\hat{E}_s / I_{ot, BB}$ ^{Note 5}	dB	1,2	9.95	9.95	7.45	-11.05	-infinity	7.95
N_{oc} ^{Note2}	dBm/SCS	1	-93			-93		
		2	-90			-90		
N_{oc} ^{Note2}	dBm/15 kHz	1, 2	-102			-102		
$\hat{E}_s / N_{oc}$	dB	1	10.5	10.5	8	-10.5	-infinity	8.5
		2						
SSB_RP ^{Note3}	dBm/SCS	1	-82.5	-82.5	-85	-103.5	-infinity	-84.5
		2	-79.5	-79.5	-82	-100.5	-infinity	-81.5
I _o	dBm/95.04 MHz	1, 2	-53.11	-53.11	-55.34	-63.61	-63.98	-54.91
Treselection	s	1, 2	0	0	0	0	0	0
SnonintrasearchP	dB	1, 2	50			50		
Thresh _{x, highP}	dB	1, 2	48			48		
Thresh _{serving, lowP}	dB	1, 2	44			44		
Thresh _{x, lowP}	dB	1, 2	50			50		

Propagation Condition		1, 2	AWGN	AWGN
Note 1:	OCNG shall be used such that both cells are fully allocated, and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	SSB_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			
Note 5:	Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_p from TS 38.101-2 [19] Table 6.2.1.3-4.			

A.17.1.1.2.3 Test Requirements

The cell reselection delay to a higher priority cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 87 s.

The cell reselection delay to a lower priority cell is defined as the time from the beginning of time period T1, to the moment when the UE camps on cell 1 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on cell 1.

The cell re-selection delay to a lower priority cell shall be less than 27 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$, and to a lower priority cell can be expressed as: $T_{\text{evaluate, NR_inter}} + T_{\text{SI-NR}}$.

Where:

$T_{\text{higher_priority_search}}$ See clause 4.2B.2.7

$T_{\text{evaluate, NR_inter}}$ See Table 4.2B.2.4-1 in clause 4.2B.2.4

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 86.88 s, allow 87 s for the cell re-selection delay to a higher priority cell and 26.88 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 27 s.

A.17.1.1.3 Cell reselection to FR2 intra-frequency NR case for UE fulfilling stationary relaxed measurement criterion for 2 Rx UE

A.17.1.1.3.1 Test Purpose and Environment

This test is to verify the requirement for the intra frequency NR cell reselection requirements for UE configured with stationary relaxed measurement criterion specified in clause 4.2B.2.9.2.

A.17.1.1.3.2 Test Parameters

The test scenario comprises of 1 NR carrier and 2 cells as given in tables A.17.1.1.3.2-1, A.17.1.1.3.2-2 and A.17.1.1.3.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and cell 2 belong to different tracking areas. During T1 and T2, only criteria *stationaryMobilityEvaluation* is configured and fulfilled. UE has not registered with network for the tracking area containing cell2.

Table A.17.1.1.3.2-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

Table A.17.1.1.3.2-2: General test parameters for FR2 intra-frequency NR cell re-selection test case for UE fulfilling stationary criterion for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell1	The UE camps on cell 1 in the initial phase
	Neighbour cells		1, 2	Cell2	
T1 end condition	Active cell		1, 2	Cell2	The UE reselects to cell 2 during T1 period
	Neighbour cells		1, 2	Cell1	
Final condition	Active cell		1, 2	Cell1	The UE reselects to cell 1 during T2 period
	Neighbour cells		1, 2	Cell2	
RF Channel Number			1, 2	1	
Time offset between cells			1, 2	3 μ s	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.
SMTC configuration			1, 2	SMTC.1	
DRX cycle length		s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index			1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell			1, 2	Not configured	
T1		s	1, 2	100	
T2		s	1, 2	100	

Table A.17.1.1.3.2-3: Cell specific test parameters for FR2 intra-frequency NR cell re-selection test case in AWGN for UE fulfilling stationary mobility criterion for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1	SR.3.1 TDD		SR.3.1 TDD	
		2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD		CR.3.1 TDD	
		2	CR.3.1 TDD		CR.3.1 TDD	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		CCR.3.1 TDD	
		2	CCR.3.1 TDD		CCR.3.1 TDD	
SSB configuration		1	SSB.3 FR2		SSB.7 FR2	
		2	SSB.4 FR2		SSB.8 FR2	

OCNG Pattern		1, 2	OP.4		OP.4	
Initial DL BWP configuration		1, 2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Initial UL BWP configuration		1, 2	66		66	
RLM-RS		1, 2	SSB		SSB	
Q _{rxlevmin}	dBm/SCS	1	-140		-140	
		2	-137		-137	
S _{SearchDeltaP-Stationary}	dB	1, 2	6		6	
T _{SearchDeltaP-Stationary}	s	1,2	5		5	
P _{compensation}	dB	1, 2	0		0	
Q _{hyst_s}	dB	1, 2	0		0	
Q _{offset_{s, n}}	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption ^{Note 4}		1,2	Rough		Rough	
$\hat{E}_s / I_{ot\ BB}$ ^{Note 5}	dB	1	-3.55	0.95	0.95	-3.55
		2				
N_{oc} ^{Note2}	dBm/SCS	1	-93			
		2	-90			
N_{oc} ^{Note2}	dBm/15 kHz	1	-102			
		2				
$\hat{E}_s / N_{oc}$	dB	1	-3	1.5	1.5	-3
		2				
SS-RSRP ^{Note3}	dBm/SCS	1	96	91.5	91.5	96
		2	93	-88.5	88.5	93
I _o on SSB symbols of each cell	dBm/95.04 MHz	1	-67.40	-65.34	-65.34	-67.40
		2	-64.40	-62.34	-62.34	-64.40
T _{reselection}	s	1, 2	0	0	0	0
S _{intrasearchP}	dB	1, 2	50		50	
Propagation Condition		1, 2	AWGN			

Note 1:

OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.

Note 2:

Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.

Note 3:

SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.

Note 4:

Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.1.1.3.3 Test Requirements

The cell reselection delay to an already detected cell for UE fulfilling stationary relaxed criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected cell shall be less than 155 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to an already detectable cell can be expressed as: $T_{\text{evaluate,NR_Intra_RedCap_Relax}} + T_{\text{SI-NR}}$,

Where:

$T_{\text{evaluate,NR_Intra_RedCap_Relax}}$ See Table 4.2B.2.9.2-2 in clause 4.2B.2.9.2,

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 154.88 s, allow 155 s for the cell re-selection delay to an already detected cell for UE fulfilling stationary criterion in the test case.

A.17.1.1.4 Cell reselection to FR2 inter-frequency NR case for UE fulfilling stationary mobility relaxed measurement criterion for 2 Rx UE

A.17.1.1.4.1 Test Purpose and Environment

This test is to verify the requirement for the inter frequency NR cell reselection requirements for UE fulfilling stationary relaxed measurement criterion specified in clause 4.2B.2.10.2.

A.17.1.1.4.2 Test Parameters

The test scenario comprises of 2 cells (Cell 1 and Cell 2) on 2 different NR carriers respectively as given in tables A.17.1.1.4.2-1, A.17.1.1.4.2-2 and A.17.1.1.4.2-3. The test consists of two successive time periods, with time duration of T1 and T2 respectively. Both cell 1 and cell 2 are already identified by the UE prior to the start of the test. Cell 1 and Cell 2 belong to different tracking areas. Furthermore, UE has not registered with network for the tracking area containing Cell 2. Cell 2 is of higher priority than Cell 1. The UE is configured with *stationaryMobilityEvaluation* criterion [2].

Table A.17.1.1.4.2-1: Supported test configurations

Configuration	Description for serving cell	Description for target cell
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.		

Table A.17.1.1.4.2-2: General test parameters for FR2 inter frequency NR cell re-selection test case for UE fulfilling stationary criterion for 2 Rx UE

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2	Cell2	The UE camps on cell2 and fulfils stationary (<i>stationaryMobilityEvaluation</i> [2]) criterion.
	Neighbour cell		1, 2	Cell1	
T1 final condition	Active cell		1, 2	Cell1	The UE reselects to low priority cell1 during T1
	Neighbour cell		1, 2	Cell2	
T2 final condition	Active cell		1, 2	Cell2	The UE reselects to high priority cell2 during T2
	Neighbour cell			Cell1	
RF Channel Number			1, 2	1, 2	
Time offset between cells			1, 2	3 μ s	Synchronous cells
Access Barring Information		-	1, 2	Not Sent	No additional delays in random access procedure.

SSB configuration		1	SSB.1 FR2	
		2	SSB.2 FR2	
SMTC configuration		1, 2	SMTC.1	
DRX cycle length	s	1, 2	0.64	The value shall be used for all cells in the test.
PRACH configuration index		1, 2	190	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
rangeToBestCell		1, 2	Not configured	
T1	s	1, 2	85	T1 needs to be long enough to allow cell re-selection to already known cell1
T2	s	1, 2	85	T2 needs to be long enough to allow cell re-selection to already known cell2

Table A.17.1.1.4.2-3: Cell specific test parameters for FR2 inter frequency NR cell re-selection test case in AWGN for UE fulfilling stationary criterion for 2 Rx UE

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
PDSCH RMC configuration		1, 2	SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET parameters		1, 2	CR.3.1 TDD		CR.3.1 TDD	
RMSI CORESET RMC configuration		1, 2	CCR.3.1 TDD		CCR.3.1 TDD	
OCNG Pattern		1, 2	OP.1 defined in A.3.2.1		OP.1 defined in A.3.2.1	
Initial DL BWP configuration		1, 2	DLBWP.0.1		DLBWP.0.1	
Initial UL BWP configuration		1, 2	ULBWP.0.1		ULBWP.0.1	
RLM-RS		1, 2	SSB		SSB	
Qrxlevmin	dBm/SCS	1	-140		-140	
		2	-137		-137	
Pcompensation	dB	1, 2	0		0	
Qhyst _s	dB	1, 2	0		0	
Qoffset _{s,n}	dB	1, 2	0		0	
Cell_selection_and_reselection_quality_measurement		1, 2	SS-RSRP		SS-RSRP	
AoA setup		1, 2	Setup 1 defined in A.3.15.1		Setup 1 defined in A.3.15.1	
Beam assumption ^{Note 4}		1, 2	Rough		Rough	
$\hat{E}_s/I_{ot\ BB}$ ^{Note 5}	dB	1, 2	9.95	7.45	-11.05	7.95
N_{oc} ^{Note 2}	dBm/SCS	1	-93		-93	
		2	-90		-90	
N_{oc} ^{Note 2}	dBm/15 kHz	1, 2	-102		-102	
$\hat{E}_s/N_{oc}$	dB	1, 2	10.5	8	-10.5	8.5
SSB_RP ^{Note 3}	dBm/SCS	1	-82.5	-85	-103.5	-84.5
		2	-79.5	-82	-100.5	-81.5
Io	dBm/95.04 MHz	1	-53.14	-55.37	-63.64	-54.94
TreselectionNR	s	1, 2	0		0	

SnointrasearchP	dB	1, 2	50	Not sent
SSearchDeltaP-Stationary	dB	1, 2	6	6
TSearchDeltaP-Stationary	s	1, 2	5	5
Thresh _{x, highP}	dB	1, 2	48	48
Thresh _{serving, lowP}	dB	1, 2	44	44
Thresh _{x, lowP}	dB	1, 2	50	50
Propagation Condition		1, 2	AWGN	AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SSB_RP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 5: Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.				

A.17.1.1.4.3 Test Requirements

The cell reselection delay to an already detected low priority cell (Cell 1) for UE fulfilling stationary criterion is defined as the time from the beginning of time period T1, to the moment when the UE camps on Cell 1, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 1.

The cell re-selection delay to an already detected low priority cell, Cell 1, shall be less than 155 s.

The cell reselection delay to an already detected high priority cell (Cell 2) for UE fulfilling stationary criterion is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a Tracking Area Update procedure on Cell 2.

The cell re-selection delay to an already detected high priority cell, Cell 2, shall be less than 155 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE 1: The cell re-selection delay to an already detected low priority cell can be expressed as:

$$T_{\text{evaluate,NR_Inter_RedCap_Relax}} + T_{\text{SI-NR}}$$

NOTE 2: The cell re-selection delay to an already detected higher priority cell can be expressed as:

$$T_{\text{evaluate,NR_Inter_RedCap_Relax}} + T_{\text{SI-NR}}$$

Where:

$T_{\text{evaluate,NR_Inter_RedCap_Relax}}$ See Table 4.2B.2.10.2-2 in clause 4.2B.2.10.2

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 154.88 s, allow 155 s for the cell re-selection delay to an already detected low priority cell for UE fulfilling stationary criterion in the test case.

This gives a total of 154.88 s, allow 155 s for the cell re-selection delay to an already detected high priority cell for UE fulfilling stationary criterion in the test case.

A.17.2 SA: RRC_INACTIVE state mobility for RedCap

A.17.2.1 Configured Grant based Small Data Transmissions (CG-SDT) for RedCap

A.17.2.1.1 TA validation for CG-SDT in FR2 for RedCap

A.17.2.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly perform TA validation for CG-SDT transmission in clause 5.2B.3. The test includes two sub-tests, Sub-test#1 for testing valid TA where UE can initiate CG-SDT transmission, and Sub-test#2 for testing invalid TA where UE does not initiate CG-SDT transmission. Sub-test#2 is only tested if Sub-test#1 is passed. For each sub-test, UE is configured with CG-SDT configurations when entering RRC Inactive state. Sub-test#1 consists of four successive time periods, with time duration of T1, T2, T3 and T4 respectively. Sub-test#2 consists of two successive time periods, with time duration of T5 and T6 respectively. There is one cell, which is the active NR cell in FR2. Figure A.17.1.1.2.1-1 shows the variation of the RSRP over the duration of Sub-test#1 and Figure A.17.1.1.2.1-2 shows the variation of the RSRP over the duration of Sub-test#2.

In Sub-test#1:

Prior to the time point TA, the UE shall be fully synchronized to PCell (Cell 1), be registered to the cell and have entered RRC connected mode.

Before starting the test at time point TA, test equipment configures RSRP to P0.

At time point TB, RSRP is changed from P0 to P1.

At time point TC which is W1 after time point TB, UE expect to receive RRC release with CG-SDT configuration and RRC status is changed to INACTIVE status.

At time point TD, RSRP is changed from P1 to P0.

At time point TE, RSRP is changed from P0 to P2. TE must be W2 before TF.

Test equipment triggers UL data arrival at UE lower layer at time point TF. After time point TF, test equipment observes whether UE transmits with CG-SDT no later than TG which is W3 after TF.

After time point TG, RRC status is changed from RRC INACTIVE to RRC CONNECTED.

In Sub-test#2:

Prior to the time point TA, the UE shall pass Sub-test#1 and have entered RRC connected mode. Otherwise, Sub-test#2 shall not be executed.

From time point TA to time point TD, RSRP is set to P2.

At time point TC, which is W1 after time point TB, UE expect to receive RRC release with CG SDT configuration and RRC status is changed to INACTIVE status.

At time point TD, RSRP is changed from P2 to P0.

Test equipment triggers UL data arrival at UE lower layer at time point TF. TF is 3520ms after TD. After time point TF, test equipment observes whether UE transmits with CG-SDT no later than TG which is W3 after TF.

W1 equals to 480ms and W2 equals to 480ms based on requirements in clause 5.2.B.2.1. W3 is 1060ms.

Table A.17.2.1.1.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	NR TDD, SSB SCS 120 kHz, data SCS 120KHz, BW 100 MHz

Table A.17.2.1.1.1-2: General test parameters for TA validation for CG-SDT in FR2

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
BW _{channel}	Config 1	MHz	100: N _{RB,c} = 66
DL initial BWP configuration	Config 1		DLBWP.0.1
UL initial BWP configuration	Config 1		ULBWP.0.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
SSB Configuration	Config 1		SSB.3 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1	kHz	120
PRACH Configuration	Config 1		Table A.3.8.3.4
OCNG parameters			OP.5
CP length			Normal
Correlation Matrix and Antenna Configuration			2x2 Low
DRX		s	0.64
cg-SDT-RSRP-ThresholdSSB		dBm	-110
cg-SDT-RSRP-ChangeThreshold		dB	[8]
cg-SDT-TimeAlignmentTime			infinity
CG-SDT resource period		ms	320
T1		s	0.8
T2		s	0.96
T3		s	3.04
T4		s	1.54
T5		s	1.76
T6		s	4.58

Table A.17.2.1.1.1-3: Cell specific test parameters TA validation for CG-SDT in FR2

Parameter	Unit	SSB#0					
		T1	T2	T3	T4	T5	T6
AoA setup		Setup 1 defined in A.3.15					
Assumption for UE beams ^{Note 4}		Rough					
EPRE ratio of PDCCH DMRS to SSS	dB	4					
EPRE ratio of PDCCH to PDCCH DMRS	dB	0					
EPRE ratio of PBCH DMRS to SSS	dB	0					
EPRE ratio of PBCH to PBCH DMRS	dB						
EPRE ratio of PSS to SSS	dB						
EPRE ratio of PDSCH DMRS to SSS	dB						
EPRE ratio of PDSCH to PDSCH DMRS	dB						

EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
N_{oc}	Config 1	dBm/15kHz	-109					
N_{oc}	Config 1	dBm/SCS	-100					
$\hat{E}_s / I_{ot}$	Config 1	dB	0	13	0	24.5	24.5	0
$\hat{E}_s / N_{oc}$	Config 1	dB	0	13	0	24.5	24.5	0
SS-RSRP	Config 1	dBm/SCS	-100	-87	-100	-75.5	-75.5	-100
Io	Config 1	dBm/95.04 MHz	-68	-57.8	-68	-46.5	-46.5	-68
Propagation condition			AWGN					
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.								
Note 3: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.								
Note 4: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.								

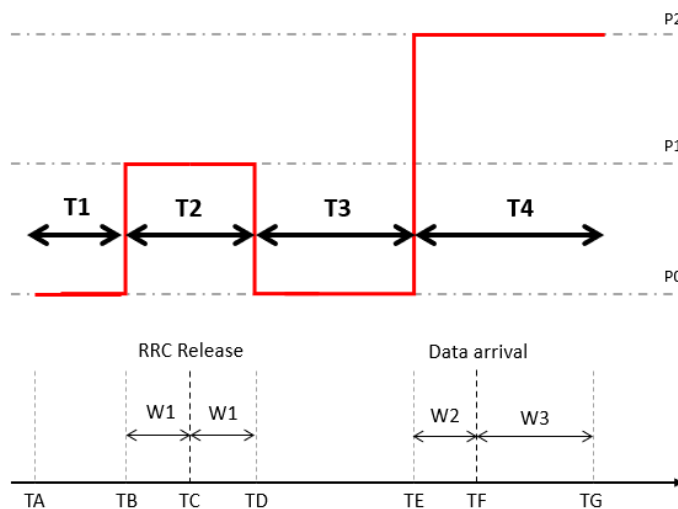


Figure A.17.2.1.1.1-1: RSRP variation model for CG-SDT Sub-test#1

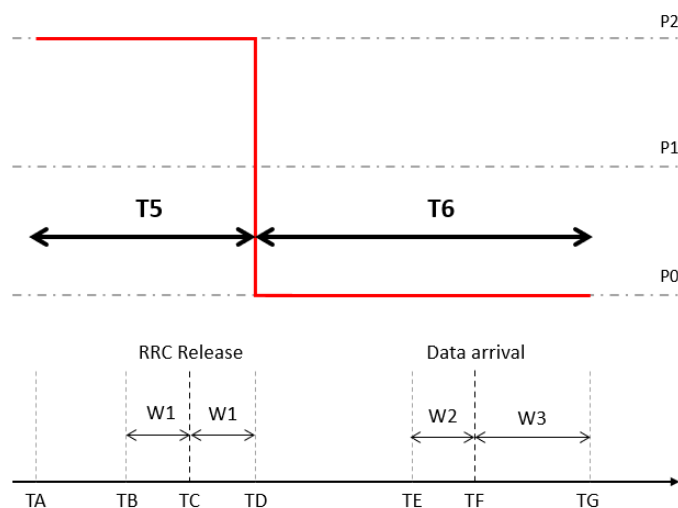


Figure A.17.2.1.1.1-2: RSRP variation model for CG-SDT Sub-test#2

A.17.2.1.1.2 Test Requirements

The UE behaviour in each test during time durations shall be as follows:

During Sub-test#1, UE shall transmit UL data with CG-SDT within 1060ms after time point TF.

During Sub-test#2, after passing Sub-test#1, UE shall not transmit PUSCH at CG-SDT resources after TF until the end of the test at time point TG.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.3 RRC_CONNECTED state mobility for RedCap

A.17.3.1 Handover for RedCap

A.17.3.1.1 Intra-frequency handover from FR2 to FR2; unknown target cell for 2 Rx

A.17.3.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2-NR FR2 intra frequency handover requirements specified in clause 6.1D.1.3.

A.17.3.1.1.2 Test Parameters

Supported test configurations are shown in table A.17.3.1.1.2-1. Both handover delay and interruption length are tested by using the parameters in table A.17.3.1.1.2-2, and A.17.3.1.1.2-3.

NR shall send a RRC message implying handover to cell 2, then UE handover to cell 2's initial BWP associated with CD-SSB. The test scenario comprises of carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.17.3.1.1.2-1: Intra-frequency handover from FR2 to FR2 test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.1.1.2-2: General test parameters Intra-frequency handover from FR2 to FR2

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 10	

Table A.17.3.1.1.2-3: Cell specific test parameters for NR FR2-FR2 Intra frequency handover test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Assumption for UE beams ^{Note 6}		Rough		Rough	
AoA setup		Setup 1 as defined in A.3.15			
NR RF Channel Number		1		1	
Duplex mode		TDD			
TDD configuration		TDDConf.3.1			
BW _{channel}	MHz	100: N _{RB,C} = 66			
BWP BW	MHz	100: N _{RB,C} = 66			
Data RBs allocated		66			
DRx Cycle	ms	Not Applicable			
PDSCH Reference measurement channel		SR3.1 TDD			
RMSI CORESET Reference Channel		CR3.1 TDD			

Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			OP. 1			
SMTc Configuration			SMTc.1			
SSB Configuration			SSB.3 FR2		SSB. 3 FR2	
PDSCH/PDCCH subcarrier spacing		kHz	120			
PUCCH/PUSCH subcarrier spacing		kHz	120			
PRACH configuration			PRACH.1 FR2			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuraiton	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc}^{Note2}						
N_{oc}^{Note2}		dBm/SCS	-95.7			
$\hat{E}_s/I_{ot}$		dB	6	-1.8	-Infinity	0
$\hat{E}_s/N_{oc}$		dB	6	6	-Infinity	7
I_o^{Note3}		dBm/BW	-59.7	-56.7	-59.7	-56.7
Propagation condition		-	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.17.3.1.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 232 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 222 ms in the test. $T_{interrupt}$ is defined in clause 6.1D.1.3.

This gives a total of 232 ms.

A.17.3.1.2 Inter-frequency handover from FR2 to FR2; unknown target cell for 2 Rx

A.17.3.1.2.1 Test Purpose and Environment

This test is to verify the requirement for the NR FR2 NCD-SSB to NR FR2 NCD-SSB inter frequency handover requirements specified in clause 6.1D.1.3.

A.17.3.1.2.2 Test Parameters

Supported test configurations are shown in table A.17.3.1.2.2-1. Both handover delay and interruption length are tested by using the parameters in table A.17.3.1.2.2-2, and A.17.3.1.2.2-3.

NR shall send a RRC message implying handover to cell 2, then UE handover from Cell 1's NCD-SSB to cell 2's specific RedCap BWP associated with NCD-SSB. The test scenario comprises of carriers and one cell on each carrier. No gap patterns are configured in the test case. The test consists of two successive time periods, with time durations of T1, T2 respectively. At the start of time duration T1, the UE does not have any timing information of cell 2. Starting T2, cell 2 becomes detectable and the UE receives a RRC handover command from the network. The start of T2 is the instant when the last TTI containing the RRC message implying handover is sent to the UE.

Table A.17.3.1.2.2-1: Inter-frequency handover from FR2 to FR2 test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.1.2.2-2: General test parameters Inter-frequency handover from FR2 to FR2

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	≤ 10	

Table A.17.3.1.2.2-3: Cell specific test parameters for NR FR2-FR2 Inter frequency handover test case

Parameter	Unit	Cell 1		Cell 2	
		T1	T2	T1	T2
Assumption for UE beams ^{Note 6}		Rough		Rough	
AoA setup		Setup 1 as defined in A.3.15			
NR RF Channel Number		1		2	
Duplex mode		TDD			
TDD configuration		TDDConf.3.1			
BW _{channel}	MHz	100: N _{RB,c} = 66			
BWP BW	MHz	100: N _{RB,c} = 66			
Data RBs allocated		66			
DRx Cycle	ms	Not Applicable			
PDSCH Reference measurement channel		SR 3.1 TDD			
RMSI CORESET Reference Channel		CR 3.1 TDD			
Control Channel RMC		CCR.3.1 TDD			
OCNG Patterns		OP. 1			
SMTC Configuration for CD-SSB		SMTC.1			
SMTC Configuration for NCD-SSB		SMTC.2 RedCap			
CD-SSB Configuration		SSB.3 RedCap FR2		SSB.3 RedCap FR2	

NCD-SSB Configuration			SSB.3 RedCap FR2 ^{Note 7}		SSB.3 RedCap FR2 ^{Note 7}	
PDSCH/PDCCH subcarrier spacing		kHz	120			
PUCCH/PUSCH subcarrier spacing		kHz	120			
PRACH configuration			PRACH.1 FR2			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuraiton	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.3 RedCap ^{Note 8}			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.3 RedCap ^{Note 8}			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						
EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} ^{Note2}		dBm/15kHz	-104.7		-104.7	
N_{oc} ^{Note2}		dBm/SCS	-95.7		-95.7	
$\hat{E}_s / I_{ot}$		dB	5	5	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	5	5	-Infinity	5
I_o ^{Note3}	Config 1,2	dBm/BW	-60.5	-60.5	-66.7	-60.5
Propagation condition		-	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 7: NCD-SSB is configured within dedicated RedCap DL BWP and CD-SSB is configured completely outside the dedicated RedCap DL BWP						
Note 8: The starting PRB index for dedicated DL BWP corresponding to NCD-SSB PRB index						
Note 9: The starting PRB index for dedicated UL BWP is the same as the dedicated DL BWP corresponding to NCD-SSB PRB index						

A.17.3.1.2.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2052 ms from the beginning of time period T2.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 10 ms and is specified in clause 12 in TS 38.331 [2].

$T_{interrupt}$ = 2042 ms in the test. $T_{interrupt}$ is defined in clause 6.1D.1.3.

This gives a total of 2052 ms.

A.17.3.2 RRC Connection Mobility Control for RedCap

A.17.3.2.1 SA: RRC Re-establishment

A.17.3.2.1.1 Intra-frequency RRC Re-establishment in FR2

A.17.3.2.1.1.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR2 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.17.3.2.1.1.1-1, table A.17.3.2.1.1.1-2 and table A.17.3.2.1.1.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure.

Table A.17.3.2.1.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.2.1.1.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1	
Time offset between cells			1	3 μ s	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	0	Radio link failure timer; T310 is disabled
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.3 FR2	
SMTC configuration			1	SMTC pattern 1	
DRX cycle length		s	1	OFF	
PRACH configuration			1	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1		s	1	5	
T2		s	1	4.84	Time for the UE to detect RLF (Summation of T _{Evaluate_out_SSB} defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3		s	1	5	

Table A.17.3.2.1.1.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams ^{Note 4}			Rough			Rough		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
BW _{channel}	MHz	1	100: N _{RB,c} = 66			100: N _{RB,c} = 66		
Data RBs allocated		1	24			24		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
TRS configuration		1	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
AoA setup		1	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s / I_{ot}$	dB	1	-0.12	-infinity	-infinity	-3.46	2	2
N_{oc} ^{Note2}	dBm/15 kHz	1	-104.7					
N_{oc} ^{Note2}	dBm/SCS	1	-95.7					
$\hat{E}_s / N_{oc}$	dB	1	4	-infinity	-infinity	2	2	2
SS-RSRP ^{Note3}	dBm/SCS	1	-91.7	-infinity	-infinity	-93.7	-93.7	-93.7
I _o	dBm/95.04 MHz	1	-64.00	-66.95	-66.95	-64.00	-66.95	-66.95
Propagation Condition		1	AWGN					
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.							
Note 3:	SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.							
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation							

A.17.3.2.1.1.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell shall be less than 5 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 1$$

$$T_{\text{identify_intra_NR}} = 3520 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target intra-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 4865 ms, allow 5 s in the test case.

A.17.3.2.1.2 Inter-frequency RRC Re-establishment in FR2

A.17.3.2.1.2.1 Test Purpose and Environment

The purpose is to verify that the NR inter-frequency RRC re-establishment delay in FR2 without known target cell is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.17.3.2.1.2.1-1, table A.17.3.2.1.2.1-2 and table A.17.3.2.1.2.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, becomes inactive. The time period T3 starts after the occurrence of the radio link failure. During T1, the UE shall be configured with the carrier frequency of cell 2 (with RF Channel Number #2) to ensure that the UE has the context of the carrier frequency of cell 2 by the end of T1.

Table A.17.3.2.1.2.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.2.1.2.1-2: General test parameters for NR inter-frequency RRC Re-establishment test case in FR2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1, 2	
Time offset between cells			1	3 μs	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	0	Radio link failure timer; T310 is disabled
T311		ms	1	5000	RRC re-establishment timer

Access Barring Information	-	1	Not Sent	No additional delays in random access procedure.
SSB configuration		1	SSB.3 FR2	
SMTC configuration		1	SMTC pattern 1	
DRX cycle length	s	1	OFF	
PRACH configuration		1	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1	s	1	5	
T2	s	1	4.84	Time for the UE to detect RLF (Summation of $T_{\text{Evaluate_out_SSB}}$ defined in clause 8.1 in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1.5 in TS 38.133)
T3	s	1	6	

Table A.17.3.2.1.2.1-3: Cell specific test parameters for NR inter-frequency RRC Re-establishment test case in FR2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams ^{Note 4}			Rough			Rough		
AoA setup		1	Setup 3 as specified in clause A.3.15			AoA2		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
BW _{channel}	MHz	1	100: N _{RB,c} = 66			100: N _{RB,c} = 66		
Data RBs allocated		1	24			24		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 TDD			CR.3.1 TDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD			CCR.3.1 TDD		
TRS configuration		1	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
N_{oc} ^{Note2}	dBm/15 kHz	1	-92.1			-92.1		
N_{oc} ^{Note2}	dBm/SCS	1	-83.1			-83.1		
$\hat{E}_s / N_{oc}$	dB	1	0	-infinity	-infinity	-infinity	-infinity	0
$\hat{E}_s / I_{\text{at BB}}$ ^{Note 5}	dB	1	-1.01	-infinity	-infinity	-infinity	-infinity	-1.01
SSB RP ^{Note3}	dBm/SCS	1	-83.1	-infinity	-infinity	-infinity	-infinity	-83.1
I _o	dBm/95.04 MHz	1	-55.46	-58.51	-58.51	-58.51	-58.51	-55.46
Propagation Condition		1	AWGN			AWGN		

Note 1:	OCNG shall be used such that a constant total transmitted power is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	Es/lot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 5:	Calculation of Es/lot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_s from TS 38.101-2 [19] Table 6.2.1.3-4.

A.17.3.2.1.2.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR inter frequency cell shall be less than 6 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 2$$

$$T_{\text{identify_intra_NR}} = 1600 \text{ ms}$$

$$T_{\text{identify_inter_NR}} = 2080 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target inter-frequency NR cell.

$T_{\text{PRACH}} = 15 \text{ ms}$; it is the additional delay caused by the random access procedure.

This gives a total of 5025 ms, allow 6 s in the test case.

A.17.3.2.1.3 Intra-frequency RRC Re-establishment in FR2 without serving cell timing

A.17.3.2.1.3.1 Test Purpose and Environment

The purpose is to verify that the NR intra-frequency RRC re-establishment delay in FR2 without serving cell timing is within the specified limits. These tests will verify the requirements in clause 6.2.1B.

The test parameters are given in table A.17.3.2.1.3.1-1, table A.17.3.2.1.3.1-2 and table A.17.3.2.1.3.1-3 below. The test consists of 3 successive time periods, with time duration of T1, T2 and T3 respectively. At the start of time period T2, cell 1, which is the active cell, is deactivated. The time period T3 starts after the occurrence of the radio link failure.

Table A.17.3.2.1.3.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.2.1.3.1-2: General test parameters for NR intra-frequency RRC Re-establishment test case in FR2

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1	Cell1	
	Neighbour cells		1	Cell2	
Final condition	Active cell		1	Cell2	
RF Channel Number			1	1	
Time offset between cells			1	3 μ s	Synchronous cells
N310		-	1	1	Maximum consecutive out-of-sync indications from lower layers
N311		-	1	1	Minimum consecutive in-sync indications from lower layers
T310		ms	1	6000	Radio link failure timer configured by <i>RLF-TimersAndConstants</i>
T311		ms	1	5000	RRC re-establishment timer
Access Barring Information		-	1	Not Sent	No additional delays in random access procedure.
SSB configuration			1	SSB.3 FR2	
SMTC configuration			1	SMTC pattern 1	
DRX cycle length		s	1	OFF	
PRACH configuration			1	FR2 PRACH configuration 1	Table A.3.8.3.1-1
T1		s	1	5	
T2		s	1	10.84	Time for the UE to detect RLF (Summation of $T_{Evaluate_out_SSB}$ defined in clause 8.1B in TS 38.133, T310 and the period for UE turns off transmitter defined in clause 8.1B.5 in TS 38.133)
T3		s	1	5	

Table A.17.3.2.1.3.1-3: Cell specific test parameters for NR intra-frequency RRC Re-establishment test case in FR2

Parameter	Unit	Test configuration	Cell 1			Cell 2		
			T1	T2	T3	T1	T2	T3
Assumption for UE beams ^{Note 4}			Rough			Rough		
TDD configuration		1	TDDConf.3.1			TDDConf.3.1		
PDSCH RMC configuration		1	SR.3.1 TDD			N/A		
RMSI CORESET RMC configuration		1	CR.3.1 FDD			CR.3.1 FDD		
Dedicated CORESET RMC configuration		1	CCR.3.1 FDD			CCR.3.1 FDD		

TRS configuration		1	TRS.2.1 TDD			N/A		
PDSCH/PDCCH TCI state		1	TCI.State.2			N/A		
OCNG Pattern		1	OP.1 defined in A.3.2.1			OP.1 defined in A.3.2.1		
Initial DL BWP configuration		1	DLBWP.0.1			DLBWP.0.1		
Initial UL BWP configuration		1	ULBWP.0.1			ULBWP.0.1		
RLM-RS		1	SSB			SSB		
AoA setup		1	Setup 1 defined in A.3.15.1			Setup 1 defined in A.3.15.1		
$\hat{E}_s / I_{ot}$	dB	1	5	-infinity	-infinity	-infinity	-infinity	5
N_{oc} ^{Note2}	dBm/15 kHz	1	-104.7					
N_{oc} ^{Note2}	dBm/SCS	1	-95.7					
$\hat{E}_s / N_{oc}$	dB	1	5	-infinity	-infinity	-infinity	-infinity	5
SS-RSRP ^{Note3}	dBm/SCS	1	-90.7	-infinity	-infinity	-infinity	-infinity	-90.7
Io	dBm/95.04 MHz	1	-60.52	-66.71	-60.52	-60.52	-66.71	-60.52
Propagation Condition		1	AWGN					
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation								

A.17.3.2.1.3.2 Test Requirements

The RRC re-establishment delay is defined as the time from the start of time period T3, to the moment when the UE starts to send PRACH preambles to cell 2 for sending the *RRCReestablishmentRequest* message to cell 2.

The RRC re-establishment delay to an unknown NR intra frequency cell without serving cell timing shall be less than 5 s.

The rate of correct RRC re-establishments observed during repeated tests shall be at least 90%.

NOTE: The RRC re-establishment delay in the test is derived from the following expression:

$$T_{\text{re-establish_delay}} = T_{\text{UL_grant}} + T_{\text{UE_re-establish_delay}}$$

Where:

$T_{\text{UL_grant}}$ = It is the time required to acquire and process uplink grant from the target cell. The PRACH reception at the system simulator is used as a trigger for the completion of the test; hence $T_{\text{UL_grant}}$ is not used.

$$T_{\text{UE_re-establish_delay}} = 50 \text{ ms} + T_{\text{identify_intra_NR}} + \sum_{i=1}^{N_{\text{freq}}-1} T_{\text{identify_inter_NR},i} + T_{\text{SI-NR}} + T_{\text{PRACH}}$$

$$N_{\text{freq}} = 1$$

$$T_{\text{identify_intra_NR}} = 3520 \text{ ms}$$

$T_{\text{SI}} = 1280 \text{ ms}$; it is the time required for receiving all the relevant system information as defined in TS 38.331 [2] for the target intra-frequency NR cell.

$T_{\text{PRACH}} = 15$ ms; it is the additional delay caused by the random access procedure.

This gives a total of 4865 ms, allow 5 s in the test case.

A.17.3.2.2 Random Access

A.17.3.2.2.1 4-step RA type contention based random access test in FR2 for NR Standalone

A.17.3.2.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell in FR2. Supported test parameters are shown in Table A.17.3.2.2.1.1-1. UE capable of SA with PCell in FR2 needs to be tested by using the parameters in Table A.17.3.2.2.1.1-2 and Table A.17.3.2.2.1.1-3.

Table A.17.3.2.2.1.1-1: Supported test configurations for contention based random access test in FR2 for NR Standalone

Config	Description
1	NR PSCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.2.2.1.1-2: General test parameters for contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.1 FR2	As defined in A.3.10
CSI-RS for tracking	Config 1		TRS.2.1 TDD	
Duplex Mode for Cell 1	Config 1		TDD	
TDD Configuration	Config 1		TDDConf.3.1	As defined in A.3.1.4
BW _{channel}	Config 1	MHz	100: $N_{\text{RB,C}} = 66$	
Data RBs allocated	Config 1		24	
OCNG Pattern ^{Note 1}			OCNG pattern 1	As defined in A.3.2.1.
PDSCH Reference Channel ^{Note 2}	Config 1		SR.3.1 TDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD	As defined in A.3.1.2
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 + Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink calibration process ^{Note 3}
Configured UE transmitted power ($P_{\text{CMAX}, f, c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]

PRACH Configuration		FR2 PRACH configuration 1	As defined in A.3.8B.3, with exceptions as defined below
rsrp-ThresholdSSB	dBm	$RSRP_{69} + \Delta_{DL}$	$RSRP_{69}$ corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process ^{Note 4}
preambleReceivedTargetPower	dBm	-100	As defined in TS 38.331 [2]
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required. Note 3: The Δ_{UL} value is calculated as $-\text{ROUND}(\text{PPRACH0} - 1)$, where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied, $\text{preambleReceivedTargetPower} = -100\text{dBm}$ and $\text{ss-PBCH-BlockPower} = 20\text{dBm}$. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH. Note 4: The Δ_{DL} value is calculated as $(RSRP_{REP} - RSRP_{76})$, where $RSRP_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value $RSRP_x$, x is treated as a positive integer value.			

Table A.17.3.2.2.1.1-3: OTA-related test parameters for contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.3.15.1
Assumption for UE beams ^{Note 3}			Rough	
SSB with index 0	Es ^{Note1}	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot _{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es ^{Note1}	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot _{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 4)	
Note 1:	No artificial noise is applied in this test.			
Note 2:	Void.			
Note 3:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			
Note 4:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].			

A.17.3.2.2.1.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.17.3.2.2.1.2.1 Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1.1 the System Simulator shall receive the Random Access Preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *rsrp-ThresholdSSB*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.17.3.2.2.1.2.2 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.1.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) and shall transmit the msg3 if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.17.3.2.2.1.2.3 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.1.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.17.3.2.2.1.2.4 Receiving an UL grant for msg3 retransmission

To test the UE behavior specified in clause 6.2.2.2.1.4 the System Simulator shall provide an UL grant for msg3 retransmission following a successful Random Access Response.

The UE shall re-transmit the msg3 upon the reception of an UL grant for msg3 retransmission.

A.17.3.2.2.1.2.5 Reception of an Incorrect Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element *not* matching the CCCH SDU transmitted in msg3 uplink message.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires unless the received message includes a UE Contention Resolution Identity MAC control element and the UE Contention Resolution Identity included in the MAC control element matches the CCCH SDU transmitted in the uplink message.

A.17.3.2.2.1.2.6 Reception of a Correct Message over Temporary C-RNTI

To test the UE behavior specified in Clause 6.2.2.2.1.5 the System Simulator shall send a message addressed to the temporary C-RNTI with a UE Contention Resolution Identity included in the MAC control element matching the CCCH SDU transmitted in the msg3 uplink message.

The UE shall send ACK if the Contention Resolution is successful.

A.17.3.2.2.1.2.7 Contention Resolution Timer expiry

To test the UE behavior specified in Clause 6.2.2.2.1.6 the System Simulator shall *not* send a response to a msg3.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if the Contention Resolution Timer expires.

A.17.3.2.2.2 4-step RA type non-contention based random access test in FR2 for NR Standalone

A.17.3.2.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the PRACH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2.2 and Clause 7.1.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell in FR2. Supported test parameters are shown in Table A.17.3.2.2.2.1-1. UE capable of SA with PCell or SCell in FR2 needs to be tested by using the parameters in Table A.17.3.2.2.2.1-2 and Table A.17.3.2.2.2.1-3 for SSB-based non-contention based random access test (Test 1) and CSI-RS-based non-contention based random access test (Test 2). Test 2 is only applicable to UE which supports csi-RSRP-AndRSRQ-MeasWithSSB or csi-RSRP-AndRSRQ-MeasWithoutSSB.

Table A.17.3.2.2.2.1-1: Supported test configurations for non-contention based random access test in FR2 for NR Standalone

Config	Description
1	NR PSCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.2.2.2.1-2: General test parameters for non-contention based random access test in FR2 for NR Standalone

Parameter	Unit	Test-1	Test-2	Comments
SSB Configuration	Config 1	SSB.1 FR2	SSB.1 FR2	As defined in A.3.10B

CSI-RS for tracking	Config 1		TRS.2.1 TDD	TRS.2.1 TDD	
CSI-RS Configuration	Config 1		N/A	CSI-RS.3.1 TDD	As defined in A.3.1B.4
Duplex Mode for Cell 2	Config 1		TDD	TDD	
TDD Configuration	Config 1		TDDConf.3.1	TDDConf.3.1	
BW _{channel}	Config 1	MHz	100: N _{RB,c} = 66	100: N _{RB,c} = 66	
Data RBs allocated	Config 1		24	24	
OCNG Pattern ^{Note 1}			OP.3	OP.3	As defined in A.3.2.1.
PDSCH Reference Channel ^{Note 2}	Config 1		SR3.1 TDD	SR3.1 TDD	As defined in A.3.1B.1.
NR RF Channel Number			1	1	
EPRE ratio of PSS to SSS		dB	0	0	
EPRE ratio of PBCH_DMRS to SSS		dB			
EPRE ratio of PBCH to PBCH_DMRS		dB			
EPRE ratio of PDCCH_DMRS to SSS		dB			
EPRE ratio of PDCCH to PDCCH_DMRS		dB			
EPRE ratio of PDSCH_DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH_DMRS		dB			
ss-PBCH-BlockPower		dBm/ SCS	+20 +Δ _{UL}	+20 +Δ _{UL}	As defined in TS 38.331 [2]. Δ _{UL} is derived from the uplink calibration process ^{Note 3}
Configured UE transmitted power ($P_{\text{CMAX}, f, c}$)		dBm	maximum value configurable for certain power class	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
PRACH Configuration			FR2 PRACH configuration 2	FR2 PRACH configuration 3	As defined in A.3.8B.3, with exceptions as defined below.
rsrp-ThresholdSSB		dBm	RSRP ₆₉ +Δ _{DL}	RSRP ₆₉ +Δ _{DL}	RSRP ₆₉ corresponds to -88dBm. Δ _{DL} is derived from the downlink calibration process ^{Note 4}
preambleReceivedTargetPower		dBm	-100	-100	As defined in TS 38.331 [2]
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required. Note 3: The Δ_{UL} value is calculated as -ROUND(PPRACH0 -1), where PPRACH0 is the measured first PRACH power with -80.6dBm/SCS applied, <i>preambleReceivedTargetPower</i> = -100dBm and <i>ss-PBCH-BlockPower</i> = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send PRACH. Note 4: The Δ_{DL} value is calculated as (RSRP_{REP} – RSRP₇₆), where RSRP_{REP} is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x, x is treated as a positive integer value.					

Table A.17.3.2.2.1-3: OTA-related test parameters for non-contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Test-2	Comments
AoA setup			Setup 1	Setup 1	As defined in A.3.15.1
Assumption for UE beams ^{Note 3}			Rough	Rough	
SSB with index 0	E_s ^{Note1}	dBm/SC S	-80.6	-80.6	Power of SSB with index 0 is set to be above configured <i>rsrp-ThresholdSSB</i>
	SSB_RP	dBm/SC S	-80.6	-80.6	
	E_s/I_{otBB}	dB	21.09	21.09	
	I_o	dBm/95.0 4 MHz	-56.01	-56.01	I_o in symbols containing SSB index 0
SSB with index 1	E_s ^{Note1}	dBm/SC S	-95.0	-95.0	Power of SSB with index 1 is set to be below configured <i>rsrp-ThresholdSSB</i>
	SSB_RP	dBm/SC S	-95.0	-95.0	
	E_s/I_{otBB}	dB	6.69	6.69	
	I_o	dBm/95.0 4 MHz	-70.41	-70.41	I_o in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 4)	No external noise (Note 4)	
Note 1: No artificial noise is applied in this test. Note 2: void. Note 3: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation Note 4: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].					

A.17.3.2.2.2.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.17.3.2.2.2.1 SSB-based Random Access Preamble Transmission

To test the UE behavior specified in Clause 6.2.2.2.1 for SSB-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-ssb-OccasionMaskIndex*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.7.3.2.2.2.2 CSI-RS-based Random Access Preamble Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.2.1 for CSI-RS-based Random Access Preamble transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with CSI-RSs configured, the System Simulator shall receive the Random Access Preamble which has the Preamble Index associated with the CSI-RS configured.

In addition, the System Simulator shall receive the Random Access Preamble on the PRACH occasion which belongs to the PRACH occasions corresponding to the CSI-RS configured, and the selected PRACH occasion shall belong to the PRACH occasions permitted by the restrictions given by the *ra-OccasionList*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.17.3.2.2.2.3 Random Access Response Reception

To test the UE behavior specified in Clause 6.2.2.2.2 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a Random Access Response *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for Random Access Response(s) if the Random Access Response contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power if all received Random Access Responses contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.17.3.2.2.2.4 No Random Access Response Reception

To test the UE behavior specified in clause 6.2.2.2.3 the System Simulator shall transmit a Random Access Response containing a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2 in TS 38.321 [7], and transmit with the calculated PRACH transmission power when the backoff time expires if no Random Access Response is received within the RA Response window configured in *RACH-ConfigCommon*.

In addition, the power applied to all preambles shall be in accordance with what is specified in Clause 6.2.2.2. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional preambles shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all PRACH transmissions shall be within the accuracy specified in Clause 7.1.2.

A.17.3.2.2.3 2-step RA type contention based random access test in FR2 for NR Standalone

A.17.3.2.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the 2-step RA type random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell or SCell in FR2. Supported test parameters are shown in Table A.17.3.2.2.3.1-1. UE capable of SA with PCell or SCell in FR2 needs to be tested by using the parameters in Table A.17.3.2.2.3.1-2 and Table A.17.3.2.2.3.1-3.

Table A.17.3.2.2.3.1-1: Supported test configurations for 2-step RA type contention based random access test in FR2 for NR Standalone

Config	Description
1	NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.2.2.3.1-2: General test parameters for 2-step RA type contention based random access test in FR2 for NR Standalone

Parameter	Unit	Test-1	Comments
SSB Configuration	Config 1	SSB.3 FR2	As defined in A.3.10
Duplex Mode for Cell 1	Config 1	TDD	
TDD Configuration	Config 1	TDDConf.3.1	As defined in A.3.1.4
BW _{channel}	Config 1	MHz	100: N _{RB,C} = 24
OCNG Pattern ^{Note 1}		OCNG pattern 1	As defined in A.3.2.1.
PDSCH Reference Channel ^{Note 2}	Config 1	SR.3.1 TDD	As defined in A.3.1.1.
RMSI CORESET Reference Channel	Config 1	CR.3.1 TDD	As defined in A.3.1.2
NR RF Channel Number		1	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH_DMRS to SSS	dB		
EPRE ratio of PBCH to PBCH_DMRS	dB		
EPRE ratio of PDCCH_DMRS to SSS	dB		
EPRE ratio of PDCCH to PDCCH_DMRS	dB		
EPRE ratio of PDSCH_DMRS to SSS	dB		
EPRE ratio of PDSCH to PDSCH_DMRS	dB		
ss-PBCH-BlockPower	dBm/ SCS	+20 +Δ _{UL}	As defined in TS 38.331 [2]. Δ _{UL} is derived from the uplink calibration process ^{Note 3}
Configured UE transmitted power ($P_{\text{CMAX}, f, c}$)	dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
MsgA Configuration		FR2 MsgA configuration 1	As defined in A.3.20.3, with exceptions as defined below
msgA-RSRP-ThresholdSSB	dBm	RSRP_69 +Δ _{DL}	RSRP_69 corresponds to -88dBm. Δ _{DL} is derived from the downlink calibration process ^{Note 4}
preambleReceivedTargetPower	dBm	-100	As defined in TS 38.331 [2]

Note 1:	OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel.
Note 2:	The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required.
Note 3:	The Δ_{UL} value is calculated as $-\text{ROUND}(\text{PMsgA0} - 1)$, where PMsgA0 is the measured first MsgA PRACH power with -80.6dBm/SCS applied, <i>msgA-PreambleReceivedTargetPower</i> = -100dBm and <i>ss-PBCH-BlockPower</i> = 20dBm. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send MsgA.
Note 4:	The Δ_{DL} value is calculated as $(\text{RSRP}_{\text{REP}} - \text{RSRP}_{76})$, where RSRP_{REP} is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value RSRP_x , x is treated as a positive integer value.

Table A.17.3.2.2.3.1-3: OTA-related test parameters for 2-step RA type contention based random access test in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
AoA setup			Setup 2b	As defined in A.3.15.2
Assumption for UE beams ^{Note 2}			Rough	
SSB with index 0	Es ^{Note1}	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured <i>msgA-RSRP-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot _{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es ^{Note1}	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured <i>msgA-RSRP-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot _{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 3)	
Note 1:	No artificial noise is applied in this test.			
Note 2:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation			
Note 3:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].			

A.17.3.2.2.3.2 Test Requirements

Contention based random access is triggered by *not* explicitly assigning a random access preamble via dedicated signalling in the downlink.

A.17.3.2.2.3.2.1 MsgA Transmission

To test the UE behavior specified in Clause 6.2.2.3.1.1 the System Simulator shall receive the MsgA with a preamble which belongs to one of the Random Access Preambles associated with the SSB with index 0, which has SS-RSRP above the configured *msgA-RSRP-ThresholdSSB*.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA preamble with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.17.3.2.2.3.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.1.2 the System Simulator shall transmit a MsgB containing a fallbackRAR message and a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB(s) and shall transmit the msg3 if the MsgB with a fallbackRAR contains a Random Access Preamble identifier corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit MsgA with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if all received MsgB's contain Random Access Preamble identifiers that do not match the transmitted Random Access Preamble.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA PRACH shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA preamble with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.17.3.2.2.3.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.1.3 the System Simulator shall transmit a MsgB containing a fallbackRAR message and Random Access Preamble identifier corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA PRACH and MsgA PUSCH transmission power when the backoff time expires if no MsgB is received within the MsgB Response window.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first MsgA PRACH shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA preamble with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.17.3.2.2.4 2-step RA type non-contention based random access test in FR2 for NR Standalone

A.17.3.2.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the behavior of the random access procedure is according to the requirements and that the MsgA PRACH, MsgA PUSCH power settings and timing are within specified limits. This test will verify the requirements in Clause 6.2.2B.2 and Clause 7.1A.2 in an AWGN model.

For this test one cell is used, with the configuration of Cell 1 configured as PCell or SCell in FR2. Supported test parameters are shown in Table A.17.3.2.2.4.1-1. UE capable of SA with PCell or SCell in FR2 needs to be tested by using the parameters in Table A.17.3.2.2.4.1-2 and Table A.17.3.2.2.4.1-3.

Table A.17.3.2.2.4.1-1: Supported test configurations for non-contention based random access test for 2-step RA type in FR2 for NR Standalone

Config	Description
1	NR PSCell/SCell 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.2.2.4.1-2: General test parameters for non-contention based random access test for 2-step RA type in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
SSB Configuration	Config 1		SSB.3 FR2	As defined in A.3.10
Duplex Mode for Cell 2	Config 1		TDD	
TDD Configuration	Config 1		TDDConf.3.1	
BW_{channel}	Config 1	MHz	100: $N_{RB,c} = 24$	
OCNG Pattern ^{Note 1}			OP.3	As defined in A.3.2.1.
PDSCH Reference Channel ^{Note 2}	Config 1		SR3.1 TDD	As defined in A.3.1.1.
NR RF Channel Number			1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH_DMRS to SSS		dB		
EPRE ratio of PBCH to PBCH_DMRS		dB		
EPRE ratio of PDCCH_DMRS to SSS		dB		
EPRE ratio of PDCCH to PDCCH_DMRS		dB		
EPRE ratio of PDSCH_DMRS to SSS		dB		
EPRE ratio of PDSCH to PDSCH_DMRS		dB		
ss-PBCH-BlockPower		dBm/ SCS	+20 + Δ_{UL}	As defined in TS 38.331 [2]. Δ_{UL} is derived from the uplink calibration process ^{Note 3}
Configured UE transmitted power ($P_{CMAX,f,c}$)		dBm	maximum value configurable for certain power class	As defined in clause 6.2.4 in TS 38.101-2 [19]
MsgA Configuration			FR2 MsgA configuration 2	As defined in A.3.20.3, with exceptions as defined below.
msgA-RSRP-ThresholdSSB		dBm	RSRP_69 + Δ_{DL}	RSRP_69 corresponds to -88dBm. Δ_{DL} is derived from the downlink calibration process ^{Note 4}
msgA-PreambleReceivedTargetPower		dBm	-100	As defined in TS 38.331 [2]
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols. The OCNG pattern is chosen during the test according to the presence of a DL reference measurement channel. Note 2: The DL PDSCH reference measurement channel is used in the test only when a downlink transmission dedicated to the UE under test is required. Note 3: The Δ_{UL} value is calculated as $-\text{ROUND}(\text{PMsgA0} - 1)$, where PMsgA0 is the measured first MsgA PRACH power with -80.6dBm/SCS applied, $\text{msgA-PreambleReceivedTargetPower} = -100\text{dBm}$ and $\text{ss-PBCH-BlockPower} = 20\text{dBm}$. These values are used during the uplink calibration process carried out before the test case is run, with the UE configured to send MsgA.				

Note 4: The Δ_{DL} value is calculated as $(RSRP_{REP} - RSRP_{76})$, where $RSRP_{REP}$ is the SS-RSRP Reported value in Table 10.1.6.1-1 with -80.6dBm/SCS applied. These values are used during the downlink calibration process carried out before the test case is run, with the UE configured to report SS-RSRP. For a Reported value $RSRP_x$, x is treated as a positive integer value.

Table A.17.3.2.2.4.1-3: OTA-related test parameters for non-contention based random access test for 2-step RA type in FR2 for NR Standalone

Parameter		Unit	Test-1	Comments
AoA setup			Setup 1	As defined in A.3.15.1
Assumption for UE beams ^{Note 2}			Rough	
SSB with index 0	Es ^{Note1}	dBm/SCS	-80.6	Power of SSB with index 0 is set to be above configured <i>msgA-RSRP-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-80.6	
	Es/Iot _{BB}	dB	21.09	
	Io	dBm/95.04 MHz	-56.01	Io in symbols containing SSB index 0
SSB with index 1	Es ^{Note1}	dBm/SCS	-95.0	Power of SSB with index 1 is set to be below configured <i>msgA-RSRP-ThresholdSSB</i>
	SSB_RP	dBm/SCS	-95.0	
	Es/Iot _{BB}	dB	6.69	
	Io	dBm/95.04 MHz	-70.41	Io in symbols containing SSB index 1
Propagation Condition		-	No external noise (Note 3)	
Note 1: No artificial noise is applied in this test.				
Note 2: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				
Note 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

A.17.3.2.2.4.2 Test Requirements

Non-Contention based random access is triggered by explicitly assigning a random access preamble via dedicated signalling in the downlink. In the test, the non-contention based random access procedure is not initialized for Other SI requested from UE or beam failure recovery.

A.17.3.2.2.4.2.1 MsgA Transmission

In Test-1, to test the UE behavior specified in Clause 6.2.2.3.2.1 for MsgA transmission, with the contention-free Random Access Resources and the contention-free PRACH occasions associated with SSBs configured, the System Simulator shall receive the MsgA which has the Preamble Index associated with the SSB with index 0.

In addition, the System Simulator shall receive the MsgA on the PRACH occasion which belongs to the PRACH occasions corresponding to the SSB with index 0, and the selected PRACH occasion shall belongs to the PRACH occasions permitted by the restrictions given first by the *msgA-SSB-SharedRO-MaskIndex* if configured, or next by the *ra-ssb-OccasionMaskIndex* if configured.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA preamble with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.17.3.2.2.4.2.2 MsgB Reception

To test the UE behavior specified in Clause 6.2.2.3.2.2 the System Simulator shall transmit a MsgB containing a successRAR MAC subPDU corresponding to the transmitted Random Access Preamble after 3 MsgA transmissions have been received by the System Simulator. In response to the first 2 preambles, the System Simulator shall transmit a MsgB *not* corresponding to the transmitted Random Access Preamble.

The UE may stop monitoring for MsgB if the MsgB contains a successRAR MAC subPDU corresponding to the transmitted Random Access Preamble.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power if all received Random Access Response Reception has not been considered as successful.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA preamble with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.17.3.2.2.4.2.3 No MsgB Reception

To test the UE behavior specified in clause 6.2.2.3.2.3 the System Simulator shall transmit a MsgB corresponding to the transmitted Random Access Preamble after 3 preambles have been received by the System Simulator. The System Simulator shall *not* respond to the first 2 preambles.

The UE shall again perform the Random Access Resource selection procedure specified in clause 5.1.2a in TS 38.321 [7], and transmit with the calculated MsgA transmission power when the backoff time expires if no MsgB is received within the MsgB Response window configured in *RACH-ConfigGenericTwoStepRA*.

In addition, the power applied to all MsgA transmissions shall be in accordance with what is specified in Clause 6.2.2.3. The power of the first preamble shall be 0.6 dBm to be received at TE with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The power of the first MsgA PUSCH transmission shall be same as the first MsgA preamble with an accuracy specified in clause 6.3.4.2 of TS 38.101-2 [19]. The relative power applied to additional MsgA transmissions shall have an accuracy specified in clause 6.3.4.3 of TS 38.101-2 [19].

The transmit timing of all MsgA transmissions shall be within the accuracy specified in Clause 7.1A.2.

A.17.3.2.3 SA: RRC Connection Release with Redirection

A.17.3.2.3.1 Redirection from NR in FR2 to NR in FR2

A.17.3.2.3.1.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from NR to NR requirements specified in clause 6.2.3A.2.1.

A.17.3.2.3.1.2 Test Parameters

Supported test configurations are shown in table A.17.3.2.3.1.2-1. The time delay is tested by using the parameters in table A.17.3.2.3.1.2-2, and A.17.3.2.3.1.2-3.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the

RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.17.3.2.3.1.2-1: Redirection from NR to NR test configurations

Config	Description
1	Source cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode Target cell: NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.3.2.3.1.2-2: General test parameters for Redirection from NR to NR test case

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	
	Neighbouring cell	Cell 2	
Final condition	Active cell	Cell 2	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	3.2	

Table A.17.3.2.3.1.2-3: Cell specific test parameters for Redirection from NR to NR test case

Parameter		Unit	Cell 1		Cell 2	
			T1	T2	T1	T2
Assumption for UE beams ^{Note 6}			Rough		Rough	
AoA setup			Setup 1as defined in A.3.15			
NR RF Channel Number			1		2	
Duplex mode			TDD			
TDD configuration			TDDConf.3.1			
BW _{channel}		MHz	100: N _{RB,c} = 66			
BWP BW		MHz	100: N _{RB,c} = 66			
Data RBs allocated			66			
DRx Cycle		ms	Not Applicable			
PDSCH Reference measurement channel			SR 3.1 TDD			
RMSI CORESET Reference Channel			CR 3.1 TDD			
Control Channel RMC			CCR.3.1 TDD			
OCNG Patterns			OP. 1			
SMTC configuration			SMTC.1			
SSB Configuration			SSB.3 FR2			
PDSCH/PDCCH subcarrier spacing		kHz	120			
PUCCH/PUSCH subcarrier spacing		kHz	120			
PRACH configuration			PRACH.1 FR2			
TRS configuration			TRS.2.1 TDD			
PDSCH/PDCCH TCI state			TCI.State.2			
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
EPRE ratio of PSS to SSS		dB	0		0	
EPRE ratio of PBCH DMRS to SSS						
EPRE ratio of PBCH to PBCH DMRS						
EPRE ratio of PDCCH DMRS to SSS						
EPRE ratio of PDCCH to PDCCH DMRS						
EPRE ratio of PDSCH DMRS to SSS						
EPRE ratio of PDSCH to PDSCH						

EPRE ratio of OCNG DMRS to SSS(Note 1)						
EPRE ratio of OCNG to OCNG DMRS (Note 1)						
N_{oc} Note2		dBm/15kHz	-104.7		-104.7	
N_{oc} Note2		dBm/SCS	-95.7		-95.7	
$\hat{E}_s / I_{ot}$		dB	5	5	-Infinity	5
$\hat{E}_s / N_{oc}$		dB	5	5	-Infinity	5
I_o Note3		dBm/BW	-60.5	-60.5	-66.7	-60.5
Propagation condition		-	AWGN		AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone						
Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						

A.17.3.2.3.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 3160 ms from the beginning of time period T2.

The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{\text{connection_release_redirect_NR}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-NR}} + T_{\text{SI-NR}} + T_{\text{RACH}},$$

where:

$T_{\text{RRC_procedure_delay}} = 110$ ms in the test.

$T_{\text{identify-NR}} = 1760$ ms in the test.

$T_{\text{SI-NR}} = 1280$ ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

$T_{\text{RACH}} = 10$ ms in the test.

This gives a total of 3160 ms.

A.17.4 Timing

A.17.4.1 UE transmit timing

A.17.4.1.1 NR UE Transmit Timing Test for FR2

A.17.4.1.1.1 Test Purpose and environment

The purpose of this test is to verify that the UE can follow frame timing change of the connected gNodeB and that the UE initial transmit timing accuracy, maximum amount of timing change in one adjustment, minimum and maximum adjustment rate are within the specified limits. This test will verify the requirements in clause 7.1A.2.

Supported test configurations are shown in Table A.17.4.1.1.1-1.

Table A.17.4.1.1.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	NR TDD, SSB SCS 240 kHz, data SCS 120 kHz, BW 100 MHz

For this test a single NR cell is used. Tables A.17.4.1.1.1-2 and A.17.4.1.1.1-2A define the parameters to be configured and strength of the transmitted signals. The transmit timing is verified by the UE transmitting SRS using the configuration defined in Table A.17.4.1.1.1-3.

Table A.17.4.1.1.1-2: Cell Specific Test Parameters for UL Transmit Timing test

Parameter	Unit	Config	Test1	Test2
SSB ARFCN		1	Freq1	Freq1
TDD configuration		1	TDDConf.3.1	
BW _{channel}	MHz	1	100: N _{RB,c} = 66	
Data RBs allocated		1	66	
Initial BWP Configuration		1	DLBWP.0.1 ULBWP.0.1	
Dedicated BWP Configuration		1	DLBWP.1.1 ULBWP.1.1	
TRS Configuration		1	TRS.2.1 TDD	
PDSCH/PDCCH TCI state		1	TCI.State.2	
DRx Cycle	ms	1	N/A	DRX.8 ^{Note5}
PDSCH Reference measurement channel		1	SR.3.3 TDD	
RMSI CORESET Reference Channel		1	CR.3.2 TDD	
Dedicated CORESET Reference Channel		1	CCR.3.7 TDD	
OCNG Patterns		1	OP.1	
SSB Configuration		1	SSB.4 FR2	
SMTc Configuration		1	SMTc.1	
PDSCH/PDCCH subcarrier spacing	kHz	1	120	
EPRE ratio of PSS to SSS	dB	1	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				

EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Propagation condition		1	AWGN	
SRS Config		1	SRSCConf.1 ^{Note6}	SRSCConf.2 ^{Note6}
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Void				
Note 3: Void				
Note 4: Void				
Note 5: DRx related parameters are given in Table A.3.3.8-1				
Note 6: SRS configs are given in Table A.17.4.1.1.1-3				

Table A.17.4.1.1.1-2A: OTA related test parameters

Parameter	Unit	Test 1	Test 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 6}		Fine	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-112	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-100	
$\hat{E}_s/N_{oc}$	dB	4	
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-96	
$\hat{E}_s/I_{ot}$	dB	4	
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-68.5	
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 2:	SS B _{RP} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 3:	Void		
Note 4:	Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone		
Note 5:	As observed with 0dBi gain antenna at the centre of the quiet zone		
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation		

Table A.17.4.1.1.1-3: SRS Configuration for Timing Accuracy Test

	Field	SRSCConf.1	SRSCConf.2	Comments
SRS-ResourceSet	srs-ResourceSetId	0	0	
	srs-ResourceIdList	0	0	
	resourceType	Periodic	Periodic	
	Usage	Codebook	Codebook	
SRS-Resource	SRS-ResourceId	0	0	
	nrofSRS-Ports	Port1	Port1	
	transmissionComb	n2	n2	
	combOffset-n2	0	0	

cyclicShift-n2	0	0	
resourceMapping startPosition	0	0	
resourceMapping nrofSymbols	n1	n1	
resourceMapping repetitionFactor	n1	n1	
freqDomainPosition	0	0	
freqDomainShift	0	0	
freqHopping c-SRS	17	17	Matches $N_{RB,c}$
freqHopping b-SRS	0	0	
freqHopping b-hop	0	0	
groupOrSequenceHopping	Neither	Neither	
resourceType	Periodic	Periodic	
periodicityAndOffset-p	sl1, 0	sl2560, 4	Offset to align with DRX periodicity
sequenceId	0	0	Any 10 bit number

Table A.17.4.1.1.1-4: Void**A.17.4.1.1.2 Test requirements**

The test sequence shall be carried out in RRC_CONNECTED for every test case.

Following will be the test sequence for this test:

- 1) Setup NR PCell according to parameters given in Table A.17.4.1.1.1-1.
- 2) After connection set up with the cell, the test equipment will verify that the timing of the NR cell is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB.
 - a. The N_{TA} offset value (in T_c units) is 13792
 - b. The T_e values depend on the DL and UL SCS for which the test is being run and are given in Table 7.1.2-1
- 3) The test system shall adjust the timing of the DL path by values given in Table A.17.4.1.1.2-1

Table A.17.4.1.1.2-1 Adjustment Value for DL Timing

SCS of SSB signals (kHz)	Adjustment Value	
	Test1	Test2
240	$+8 \times 64 T_c$	$+4 \times 64 T_c$

- 4) The test system shall verify that the adjustment step size and the adjustment rate shall be according to requirements specified in clause 7.1.2 Table 7.1.2.1-1 until the UE transmit timing offset is within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ respective to the first detected path (in time) of DL SSB. Skip this step for test 2 with DRX configured.
- 5) The test system shall verify that the UE transmit timing offset stays within $(N_{TA} + N_{TA_offset}) \times T_c \pm T_e$ of the first detected path of DL SSB. For Test 2 the UE transmit timing offset shall be verified for the first transmission in the DRX cycle immediately after DL timing adjustment.

A.17.4.2 UE timer accuracy

A.17.4.3 Timing advance

A.17.4.3.1 SA FR2 timing advance adjustment accuracy

A.17.4.3.1.1 Test Purpose and Environment

The purpose of the test is to verify UE Timing Advance adjustment delay and accuracy requirement defined in clause 7.3A.

A.17.4.3.1.2 Test Parameters

Supported test configurations are shown in table A.17.4.3.1.2-1. Both timing advance adjustment delay and accuracy are tested by using the parameters in table A.17.4.3.1.2-2, A.17.4.3.1.2-3 and A.17.4.3.1.2-4.

In all test cases, single cell is used. Each test consists of two successive time periods, with time duration of T1 and T2 respectively. In each time period, timing advance commands are sent to the UE and Sounding Reference Signals (SRS), as specified in table A.17.4.3.1.2-3, are sent from the UE and received by the test equipment. By measuring the reception of the SRS, the transmit timing, and hence the timing advance adjustment accuracy, can be measured.

During time period T1, the test equipment shall send one message with a Timing Advance Command MAC Control Element, as specified in clause 6.1.3.4 in TS 38.321 [7]. The Timing Advance Command value shall be set to 31, which according to clause 4.2 in TS 38.213 [3] results in zero adjustment of the Timing Advance. In this way, a reference value for the timing advance used by the UE is established.

During time period T2, the test equipment shall send a sequence of messages with Timing Advance Command MAC Control Elements, with Timing Advance Command value specified in table A.17.4.3.1.2-2. This value shall result in changes of the timing advance used by the UE, and the accuracy of the change shall then be measured, using the SRS sent from the UE.

As specified in Clause 7.3.2.1, the UE adjusts its uplink timing at slot $n+k$ for a timing advance command received in slot n . This delay must be taken into account when measuring the timing advance adjustment accuracy, via the SRS sent from the UE.

The UE Time Alignment Timer, described in Clause 5.2 in TS 38.321 [7], shall be configured so that it does not expire in the duration of the test.

Table A.17.4.3.1.2-1: Timing advance supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.4.3.1.2-2: General test parameters for timing advance

Parameter	Unit	Value	Comment
RF channel number		1	
Initial DL BWP		DLBWP.0.1	As specified in Table A.3.9.2.1-1
Dedicated DL BWP		DLBWP.1.1	As specified in Table A.3.9.2.2-1
Initial UL BWP		ULBWP.0.1	As specified in Table A.3.9.3.1-1
Dedicated UL BWP		ULBWP.1.1	As specified in Table A.3.9.3.2-1
Timing Advance Command (T_A) value during T1		31	$N_{TA_new} = N_{TA_old}$ for the purpose of establishing a reference value from which the timing advance adjustment accuracy can be measured during T2
Timing Advance Command (T_A) value during T2		39	For 120 kHz SCS $N_{TA_new} = N_{TA_old} + 1024 \cdot T_c$ (based on equation in clause 4.2 of TS 38.213 [3])

T1	s	5	
T2	s	5	

Table A.17.4.3.1.2-3: Cell specific test parameters for timing advance

Parameter	Unit	Test1	
		T1	T2
Duplex mode		TDD	
TDD configuration		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,c} = 66	
BWP BW	MHz	100: N _{RB,c} = 66	
DRx Cycle	ms	Not Applicable	
PDSCH Reference measurement channel		SR.3.1 TDD	
CORESET Reference Channel		CR.3.1 TDD	
OCNG Patterns		OP.1	
TRS configuration		TRS.2.1 TDD	
PDSCH/PDCCH TCI state		TCI.State.2	
SMTC configuration		SMTC.1	
SSB Configuration		SSB.1 FR2	
PDSCH/PDCCH subcarrier spacing	kHz	120	
PUCCH/PUSCH subcarrier spacing	kHz	120	
EPRE ratio of PSS to SSS	dB	0	
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Propagation condition	-	AWGN	
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 3:	Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone		
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone		

Table A.17.4.3.1.2-3A: OTA related test parameters

Parameter	Unit	Test 1	
		T1	T2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 6}		Fine	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-112	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-103	
$\hat{E}_s/N_{oc}$	dB	4	
SS-RSRP ^{Note2}	dBm/SCS ^{Note4}	-99	

$\hat{E}_s / I_{ot}$	dB	4
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-68.5
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone Note 6: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation		

Table A.17.4.3.1.2-4: Sounding Reference Symbol Configuration for timing advance

Field	Value	Comment
c-SRS	16	Frequency hopping is disabled
b-SRS	0	
b-hop	0	
freqDomainPosition	0	Frequency domain position of SRS
freqDomainShift	0	
groupOrSequenceHopping	neither	No group or sequence hopping
SRS-PeriodicityAndOffset	sl5=0	Once every 5 slots
pathlossReferenceRS	ssb-Index=0	SSB #0 is used for SRS path loss estimation
usage	Codebook	Codebook based UL transmission
startPosition	0	resourceMapping setting. SRS on last symbol of slot, and 1symbols for SRS without repetition.
nrofSymbols	n1	
repetitionFactor	n1	
combOffset-n2	0	transmissionComb setting
cyclicShift-n2	0	
nrofSRS-Ports	port1	Number of antenna ports used for SRS transmission
Note: For further information see clause 6.3.2 in TS 38.331 [2].		

A.17.4.3.1.3 Test Requirements

The UE shall apply the signalled Timing Advance value to the transmission timing at the designated activation time i.e. $k+1$ slots after the reception of the timing advance command, where $k = 11$.

The Timing Advance adjustment accuracy shall be within the limits specified in clause 7.3A.2.2.

The rate of correct Timing Advance adjustments observed during repeated tests shall be at least 90%.

A.17.5 Signaling characteristics for RedCap

A.17.5.1 Radio link Monitoring for RedCap

A.17.5.1.1 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode

A.17.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.17.5.1.1 .1-1. The test parameters are given in Tables A.17.5.1.1 .1-2, A.17.5.1.1 .1-3, and A.17.5.1.1 .1-4 below. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.17.5.1.1 .1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure A.17.5.1.1 .1-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In addition to RLM-RS radio link monitoring using SSB index 0 and SSB index 1, the UE is configured to perform inter-frequency measurements using Gap Pattern ID #0 (40ms) in test 1.

Table A.17.5.1.1 .1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.17.5.1.1 .1-2: General test parameters for FR2 out-of-sync testing in non-DRX mode

Parameter		Unit	Value Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
BW _{channel}	Config 1		100: N _{RB,C} = 66
Data RBs allocated	Config 1		24
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
PRACH Configuration	Config 1		Table A.3.8.3.4
SSB index assigned as RLM RS	Config 1		0,1
OCNG parameters			OP.5
CP length			Normal

Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			gp0
Layer 3 filtering			Enabled
T310 timer	ms		0
T311 timer	ms		1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity	slot		40
CSI reporting offset	slot		4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1		TRS.2.1 TDD
T1	s		0.2
T2	s		9.68
T3	s		9.68
D1	s		9.64
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.17.5.1.1 .1-3: OTA related cell specific test parameters for FR2 (Cell 1) for out-of-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1					
			T1	T2	T3	T1	T2	T3
AoA setup			Setup 3 defined in A.3.15					
			AoA1			AoA2		
Assumption for UE beams ^{Note 5}			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
ssb-Index 0 SNR	Config 1	dB	2 ^{Note 6}	-6 ^{Note 6}	-15			
ssb-Index 1 SNR	Config 1		Not sent			2 ^{Note 6}	-15	-15
N _{oc}	Config 1	dBm/ 15kHz	-92.1			-92.1		
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure A.17.5.1.1 .1-2					
Propagation condition			TDL-A 30ns 75Hz			TDL-A 30ns 75Hz		

Note 1:	OCNG shall be used such a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.
Note 3:	SNR levels correspond to the signal to noise ratio over the SSS REs.
Note 4:	The SNR values are specified for testing a UE which supports 2RX on at least one band..
Note 5:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
Note 6:	This value allows up to 1dB degradation from applied SNR to UE baseband

Table A.17.5.1.1 .1-4: Measurement gap configuration for out-of-sync tests in non-DRX mode

Field	Test 1
	Value
gapOffset	0

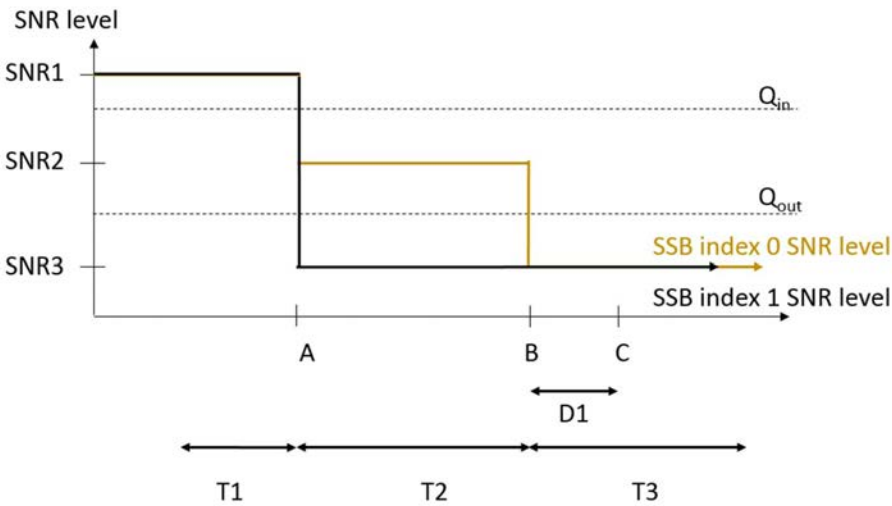


Figure A.17.5.1.1 .1-1: SNR variation for out-of-sync testing

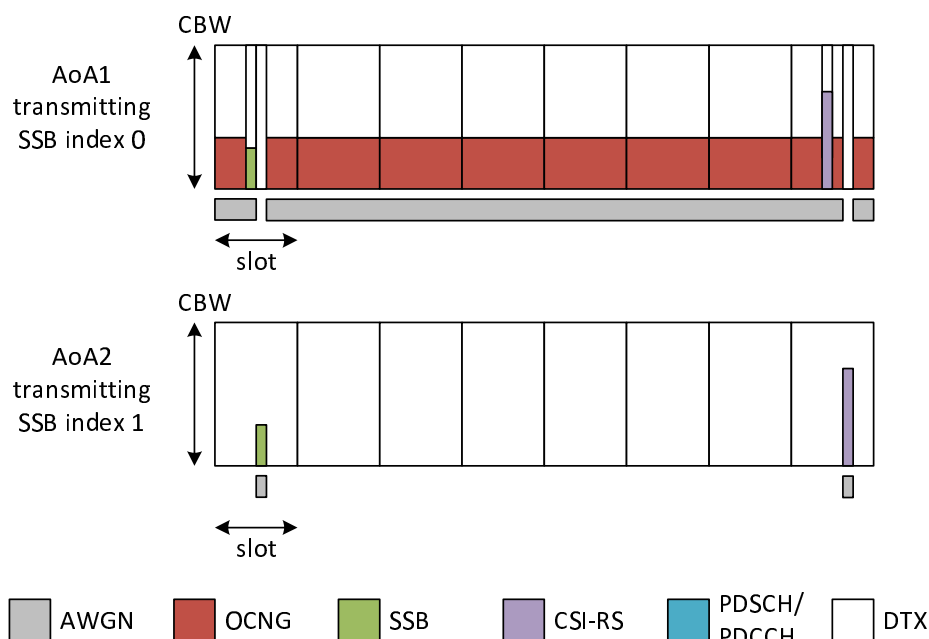


Figure A.17.5.1.1 .1-2: Time multiplexed downlink transmissions

A.17.5.1.1.2 Test Requirements

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.1.2 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in non-DRX mode

A.17.5.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.17.5.1.2.1-1. The test parameters are given in Tables A.17.5.1.2.1-2, and A.17.5.1.2.1-3 below. There is one cell (Cell 1), which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.17.5.1.2.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure A.17.5.1.2.1-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms.

Table A.17.5.1.2.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.17.5.1.2.1-2: General test parameters for FR2 in-sync testing in non-DRX mode

Parameter		Unit	Value Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
BW _{channel}	Config 1		100: N _{RB,c} = 66
Data RBs allocated	Config 1		24
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTc Configuration	Config 1		SMTc.3
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
PRACH Configuration	Config 1		Table A.3.8.3.4
SSB index assigned as RLM RS	Config 1		0,1
OCNG parameters			OP.5
CP length			Normal
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.

Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	4000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
TCI states for PDCCH/PDSCH			TCI.State.2
CSI-RS for tracking	Config 1		TRS.2.1 TDD
T1		s	0.2
T2		s	0.2
T3		s	1.88
T4		s	0.2
T5		s	3.84
D1		s	3.8
Note 1: All configurations are assigned to the UE prior to the start of time period T1.			
Note 2: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.17.5.1.2.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for in-sync radio link monitoring tests in non-DRX mode

Parameter		Unit	Test 1									
			T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
AoA setup			Setup 3 defined in A.3.15									
			AoA1					AoA2				
Assumption for UE beams ^{Note 5}			Rough					Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0					Not sent				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0									
EPRE ratio of PBCH DMRS to SSS		dB										
EPRE ratio of PBCH to PBCH DMRS		dB										
EPRE ratio of PSS to SSS		dB										
EPRE ratio of PDSCH DMRS to SSS		dB										
EPRE ratio of PDSCH to PDSCH DMRS		dB										
EPRE ratio of OCNG DMRS to SSS		dB										
EPRE ratio of OCNG to OCNG DMRS		dB										
ssb-Index 0 SNR	Config 1	dB	2 ^{Note 6}	-6 ^{Note 6}	-15	-15	-15					
ssb-Index 1 SNR	Config 1		Not sent					2 ^{Note 6}	-15	-15	-4.5	2 ^{Note 6}
N _{oc}	Config 1	dBm/ 15kHz	-92.1					-92.1				
Time multiplexing of the downlink transmissions from each AoA			Defined in Figure A.17.5.1.2.1-2									
Propagation condition			TDL-A 30ns 75Hz					TDL-A 30ns 75Hz				
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.												
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.												
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.												
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band.												
Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.												
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband												

Table A.17.5.1.2.1-4: Void

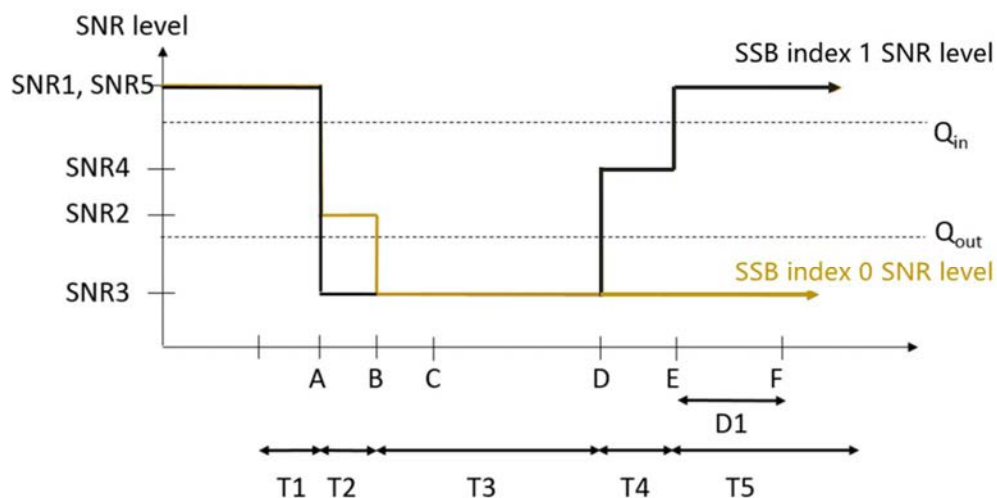


Figure A.17.5.1.2.1-1: SNR variation for in-sync testing

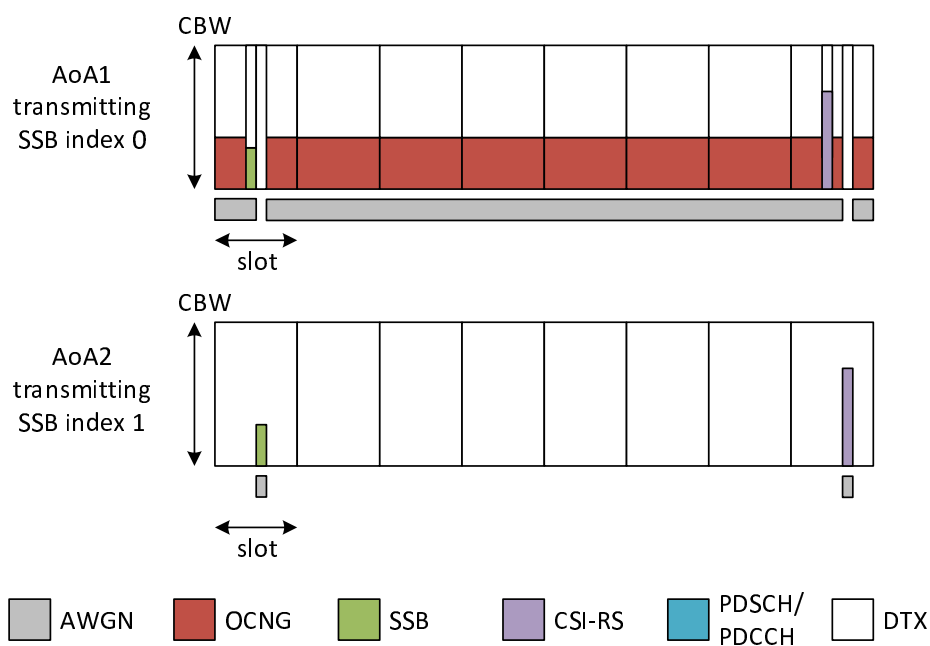


Figure A.17.5.1.2.1-2: Time multiplexed downlink transmissions

A.17.5.1.2.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.1.3 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

A.17.5.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.17.5.1.3.1-1. The test parameters are given in Tables A.17.5.1.3.1-2, and A.17.5.1.3.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.17.5.1.3.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states, and Figure A.17.5.1.3.1-2 shows the Time multiplexed downlink transmissions from each Angle of Arrival. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to "infinity" so that UL timing alignment is maintained during the test.

Table A.17.5.1.3.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.17.5.1.3.1-2: General test parameters for FR2 out-of-sync testing in DRX mode

Parameter		Unit	Value Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
BW _{channel}	Config 1		100: N _{RB,c} = 66
Data RBs allocated	Config 1		24
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTc Configuration	Config 1		SMTc.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz

PRACH Configuration		Config 1		Table A.3.8.3.1
SSB index assigned as RLM RS		Config 1		0,1
OCNG parameters				OP.5
CP length				Normal
Out of sync transmission parameters	DCI format			1-0
	Number of Control OFDM symbols			2
	Aggregation level		CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy		dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy		dB	4
	DMRS precoder granularity			REG bundle size
				6
DRX Configuration				DRX.3
Gap pattern ID				N.A.
Layer 3 filtering				<i>Enabled</i>
T310 timer			ms	0
T311 timer			ms	1000
N310				1
N311				1
CSI-RS for CSI reporting		Config 1		CSI-RS.3.1 TDD
reportConfigType				periodic
reportQuantity				cri-RI-PMI-CQI
CSI reporting periodicity			slot	40
CSI reporting offset			slot	4
TCI states for PDCCH/PDSCH				TCI.State.2
CSI-RS for tracking		Config 1		TRS.2.1 TDD
T1			s	0.2
T2			s	14.48
T3			s	14.48
D1			s	14.44
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.17.5.1.3.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for out-of-sync radio link monitoring tests in DRX mode

Parameter		Unit	Test 1					
			T1	T2	T3	T1	T2	T3
AoA setup			Setup 3 defined in A.3.15					
			AoA1			AoA2		
Assumption for UE beams ^{Note 5}			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0					
EPRE ratio of PBCH DMRS to SSS		dB						
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
ssb-Index 0 SNR	Config 1	dB	2 ^{Note 6}	-6 ^{Note 6}	-15			
ssb-Index 1 SNR	Config 1		Not sent			2 ^{Note 6}	-15	-15
N_{oc}	Config 1	dBm/ 15kHz	-92.1			-92.1		

Time multiplexing of the downlink transmissions from each AoA		Defined in Figure A.17.5.1.1 .1-2	
Propagation condition		TDL-A 30ns 75Hz	TDL-A 30ns 75Hz
Note 1: OCNG shall be used such a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG. Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs. Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band.. Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation. Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband			

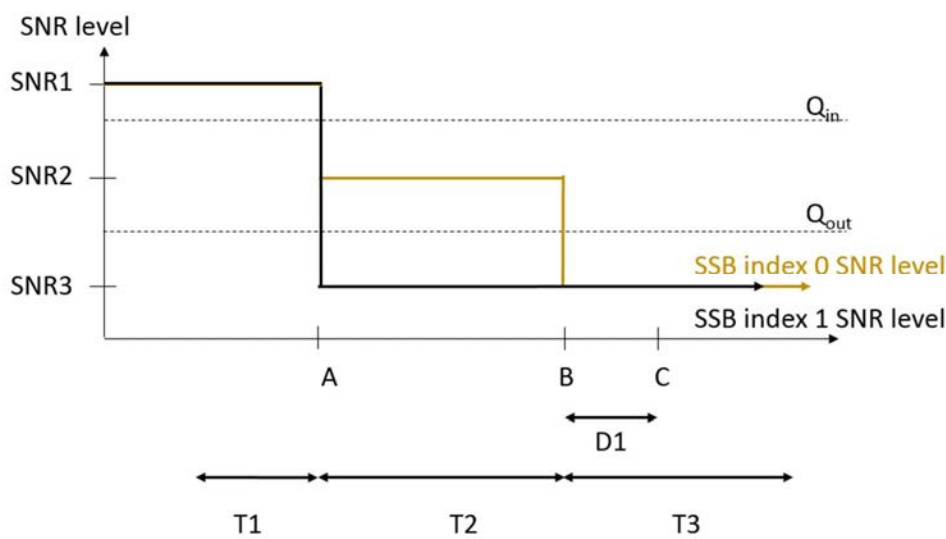


Figure A.17.5.1.3.1-1: SNR variation for out-of-sync testing

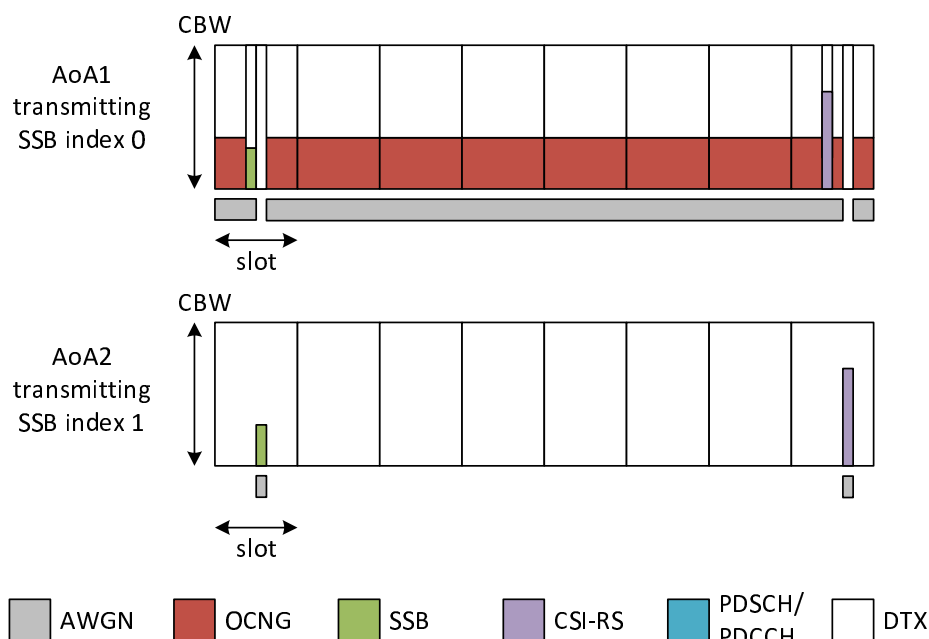


Figure A.17.5.1.3.1-2: Time multiplexed downlink transmissions

A.17.5.1.3.2 Test Requirements

The UE behavior in each test during time durations T1, T2 and T3 shall be as follows:

During the period from time point A to time point B the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The UE shall stop transmitting uplink signal no later than time point C (D1 second after the start of the time duration T3).

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.1.4 Radio Link Monitoring In-sync Test for FR2 PCell configured with SSB-based RLM RS in DRX mode

A.17.5.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync and in sync for the purpose of monitoring downlink radio link quality of the PCell when DRX is used. This test will partly verify the FR2 radio link monitoring requirements in clause 8.1B.

In the test, UE is configured to perform RLM on SSB, with *detectionResource* included in *RadioLinkMonitoringRS* set to SSB#0 and SSB#1, and *purpose* set to 'rlf'. Supported test configurations are shown in table A.17.5.1.4.1-1. The test parameters are given in Tables A.17.5.1.4.1-2, and A.17.5.1.4.1-3. There is one cell (Cell 1), which is the active NR cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.17.5.1.4.1-1 shows the variation of the downlink SNR in the active cell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to Cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX

configuration is enabled and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CSI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.17.5.1.4.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD, SSB SCS 120 KHz, data SCS 120KHz, BW 100 MHz

Table A.17.5.1.4.1-2: General test parameters for FR2 in-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
BW _{channel}	Config 1		100: N _{RB,C} = 66
Data RBs allocated	Config 1		66
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
TDD Configuration	Config 1		TDDConf.3.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.3
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
PRACH Configuration	Config 1		Table A.3.8.3.4
SSB index assigned as RLM RS	Config 1		0,1
OCNG parameters			OP.1
CP length			Normal
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6

DRX Configuration		DRX.11
Gap pattern ID		N.A.
Layer 3 filtering		<i>Enabled</i>
T310 timer	ms	4000
T311 timer	ms	1000
N310		1
N311		1
CSI-RS for CSI reporting	Config 1	CSI-RS.3.1 TDD
reportConfigType		periodic
reportQuantity		cri-RI-PMI-CQI
CSI reporting periodicity		slot
CSI reporting offset		slot
TCI states for PDCCH/PDSCH		TCI.State.2
CSI-RS for tracking	Config 1	TRS.2.1 TDD
T1	s	0.2
T2	s	0.2
T3	s	2.8
T4	s	0.2
T5	s	3.88
D1	s	3.84
Note 1: All configurations are assigned to the UE prior to the start of time period T1.		
Note 2: UE-specific PDCCH is not transmitted after T1 starts.		

Table A.17.5.1.4.1-3: OTA related cell specific test parameters for FR2 (Cell 1) for in-sync radio link monitoring test in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 5}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB	0				
EPRE ratio of PBCH DMRS to SSS		dB	0				
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
ssb-Index 0 SNR	Config 1	dB	2 ^{Note 6}	-6 ^{Note 6}	-15	-4.5	2 ^{Note 6}
ssb-Index 1 SNR	Config 1		2 ^{Note 6}	-15	-15	-15	-15
N_{oc}	Config 1	dBm/15KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The signal contains PDCCH for UEs other than the device under test as part of OCNG.3							
Note 3: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 4: The SNR values are specified for testing a UE which supports 2RX on at least one band.							
Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.							
Note 6: This value allows up to 1dB degradation from applied SNR to UE baseband.							

Table A.17.5.1.4.1-4: Void

Table A.17.5.1.4.1-5: Void

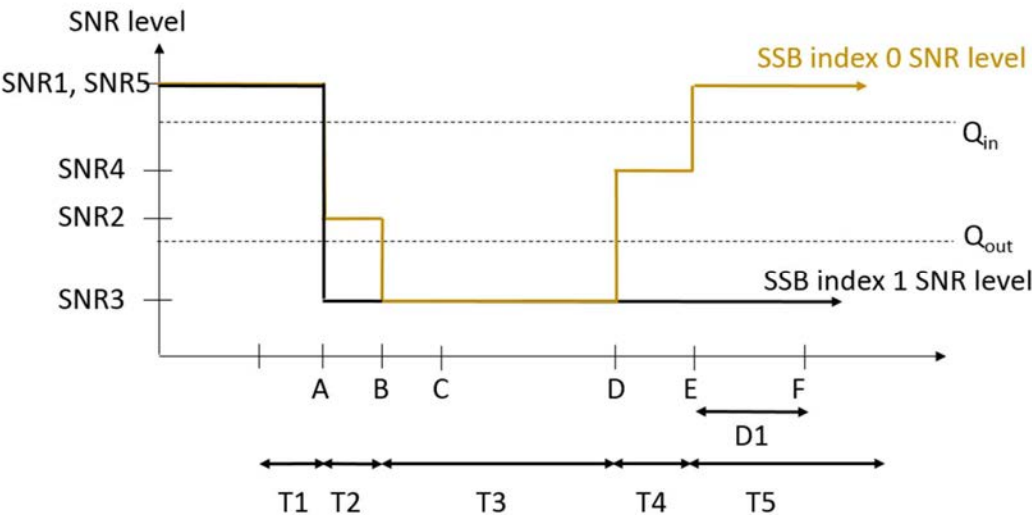


Figure A.17.5.1.4.1-1: SNR variation for in-sync testing

A.17.5.1.4.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.1.5 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

A.17.5.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR2 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.17.5.1.5.1-1, A.17.5.1.5.1-2, A.17.5.1.5.1-3 and A.17.5.1.5.1-4 below. There is one cell, cell 1 which is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3 respectively. Figure A.17.5.1.5.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.17.5.1.5.1-1: Supported test configurations for FR2 PCell

Configuration	Description
---------------	-------------

1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth
---	---

Table A.17.5.1.5.1-2: General test parameters for FR2 PCell for CSI-RS out-of-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
BW _{channel}	Config 1		100: N _{RB,c} = 66
Data RBs allocated	Config 1		24
BW _{occupied}	Config 1		24
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.4
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.4
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD CCR.3.6 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			*gp0
Layer 3 filtering			Enabled
T310 timer		ms	0
T311 timer		ms	1000
N310			1
N311			1

CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity	slot		40
CSI reporting offset	slot		4
T1	s		0.2
T2	s		0.35
T3	s		0.35
D1	s		0.31
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.17.5.1.5.1-3: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1					
			T1	T2	T3	T1	T2	T3
AoA setup			Setup 3 defined in A.3.15					
			AoA1			AoA2		
Assumption for UE beams ^{Note 10}			Rough			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4			Not sent		
EPRE ratio of PDCCH to PDCCH DMRS		dB						
EPRE ratio of PBCH DMRS to SSS		dB	0					
EPRE ratio of PBCH to PBCH DMRS		dB						
EPRE ratio of PSS to SSS		dB						
EPRE ratio of PDSCH DMRS to SSS		dB						
EPRE ratio of PDSCH to PDSCH DMRS		dB						
EPRE ratio of OCNG DMRS to SSS		dB						
EPRE ratio of OCNG to OCNG DMRS		dB						
SNR on RLM-RS1	Config 1	dB	2 ^{Note 11}	-6 ^{Note 11}	-15			
SNR on RLM-RS2	Config 1		Not sent			2 ^{Note 11}	-15	-15
N_{oc}	Config 1	dBm/ 15kHz	-92.1			-92.1		
Propagation condition			TDL-C 300ns 100Hz			TDL-C 300ns 100Hz		
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.								
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.								
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.								
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.								
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.								
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.								
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.								
Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.17.5.1.5.1-1.								
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.								
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.								
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband								

Table A.17.5.1.5.1-4: Measurement gap configuration for FR2 CSI-RS out-of-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0

Note 1: RLM RS is partially overlapped with measurement gap

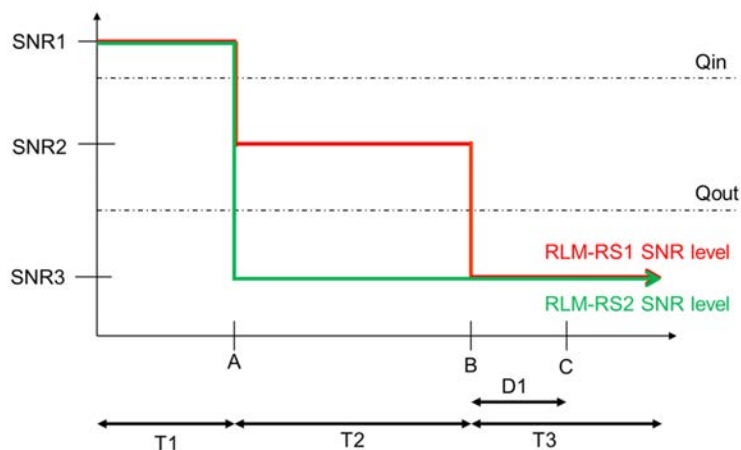


Figure A.17.5.1.5.1-1: SNR variation for CSI-RS out-of-sync testing

A.17.5.1.5.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 no later than time point C (D_1 second after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.1.6 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in non-DRX mode

A.17.5.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when no DRX is used. This test will partly verify the FR2 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.17.5.1.6.1-1, A.17.5.1.6.1-2 and A.17.5.1.6.1-3 below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.17.5.1.6.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. In the test, DRX configuration is not enabled. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.17.5.1.6.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.17.5.1.6.1-2: General test parameters for FR2 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
BW _{channel}	Config 1		100: N _{RB,C} = 66
Data RBs allocated	Config 1		24
BW _{occupied}	Config 1		24
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.4
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.4
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.5
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4

	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			OFF
Gap pattern ID			N.A.
Layer 3 filtering			<i>Enabled</i>
T310 timer		ms	1000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	0.24
T4		s	0.2
T5		s	0.88
D1		s	0.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.17.5.1.6.1-3: Cell specific test parameters for FR2 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter		Unit	Test 1									
			T1	T2	T3	T4	T5	T1	T2	T3	T4	T5
AoA setup			Setup 3 defined in A.3.15									
Assumption for UE beams ^{Note 10}			AoA1					AoA2				
EPRE ratio of PDCCH DMRS to SSS		dB	Rough					Rough				
EPRE ratio of PDCCH to PDCCH DMRS		dB	4					Not sent				
EPRE ratio of PBCH DMRS to SSS		dB	0									
EPRE ratio of PBCH to PBCH DMRS		dB										
EPRE ratio of PSS to SSS		dB										
EPRE ratio of PDSCH DMRS to SSS		dB										
EPRE ratio of PDSCH to PDSCH DMRS		dB										
EPRE ratio of OCNG DMRS to SSS		dB										
EPRE ratio of OCNG to OCNG DMRS		dB										
SNR on RLM-RS1	Config 1	dB	2 ^{Note 11}	-6 ^{Note 11}	-15	-15	-15					
SNR on RLM-RS2	Config 1		Not sent					2 ^{Note 11}	-15	-15	-4.5	2 ^{Note 11}
N_{oc}	Config 1	dBm/15KHz	-92.1					-92.1				
Propagation condition			TDL-C 300ns 100Hz					TDL-C 300ns 100Hz				

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
- Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.17.5.1.6.1-1.
- Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.
- Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
- Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.

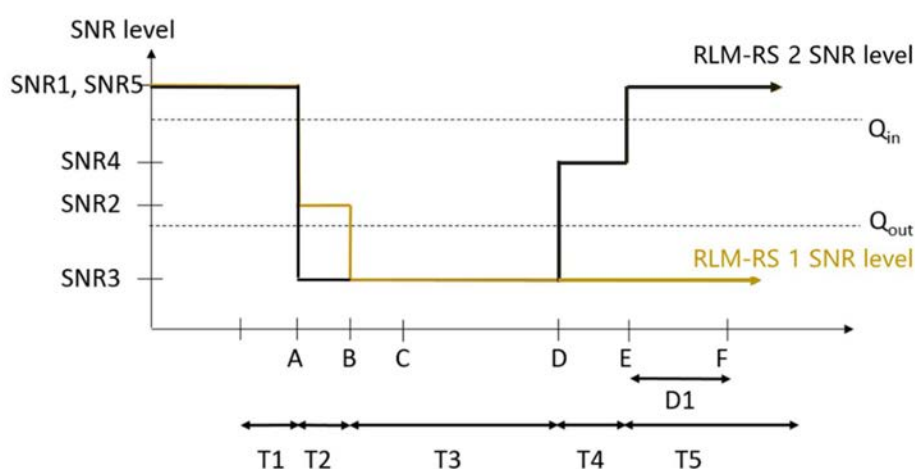


Figure A.17.5.1.6.1-1: SNR variation for CSI-RS in-sync testing

A.17.5.1.6.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.1.7 Radio Link Monitoring Out-of-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

A.17.5.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the out of sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR2 PCell CSI-RS Out-of-sync radio link monitoring requirements in clause 8.1B.3.

The test parameters are given in Tables A.17.5.1.7.1-1, A.17.5.1.7.1-2, and A.17.5.1.7.1-3 below. There is one cell, cell 1 is the PCell, in the test. The test consists of three successive time periods, with time duration of T1, T2 and T3

respectively. Figure A.17.5.1.7.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.17.5.1.7.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.17.5.1.7.1-2: General test parameters for FR2 PCell for CSI-RS out-of-sync testing in DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.4 TDD CCR.3.6 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTC Configuration	Config 1		SMTC.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1
CP length			Normal
Out of sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6

DRX		DRX.3
Gap pattern ID		N.A.
Layer 3 filtering		<i>Enabled</i>
T310 timer	ms	0
T311 timer	ms	1000
N310		1
N311		1
CSI-RS for CSI reporting	Config 1	CSI-RS.3.1 TDD
reportConfigType		periodic
reportQuantity		cri-RI-PMI-CQI
CSI reporting periodicity	slot	40
CSI reporting offset	slot	4
T1	s	0.2
T2	s	1.28
T3	s	1.28
D1	s	1.24
Note 1: UE-specific PDCCH is not transmitted after T1 starts.		

Table A.17.5.1.7.1-3: Cell specific test parameters for FR2 for CSI-RS out-of-sync radio link monitoring in DRX mode

Parameter		Unit	Test 1		
			T1	T2	T3
AoA setup		dB	Setup 1 defined in A.3.15		
Assumption for UE beams ^{Note 10}			Rough		
EPRE ratio of PDCCH DMRS to SSS		dB	4		
EPRE ratio of PDCCH to PDCCH DMRS		dB	0		
EPRE ratio of PBCH DMRS to SSS		dB			
EPRE ratio of PBCH to PBCH DMRS		dB			
EPRE ratio of PSS to SSS		dB			
EPRE ratio of PDSCH DMRS to SSS		dB			
EPRE ratio of PDSCH to PDSCH DMRS		dB			
EPRE ratio of OCNG DMRS to SSS		dB			
EPRE ratio of OCNG to OCNG DMRS		dB			
SNR on RLM-RS1	Config 1	dB	2 ^{Note 11}	-6 ^{Note 11}	-15
SNR on RLM-RS2	Config 1	dB	2 ^{Note 11}	-15	-15
N_{oc}	Config 1	dBm/15KHz	-104.7		
Propagation condition			TDL-C 300ns 100Hz		

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
- Note 8: The SNR in time periods T1, T2 and T3 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.17.5.1.7.1-1.
- Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.
- Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
- Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.

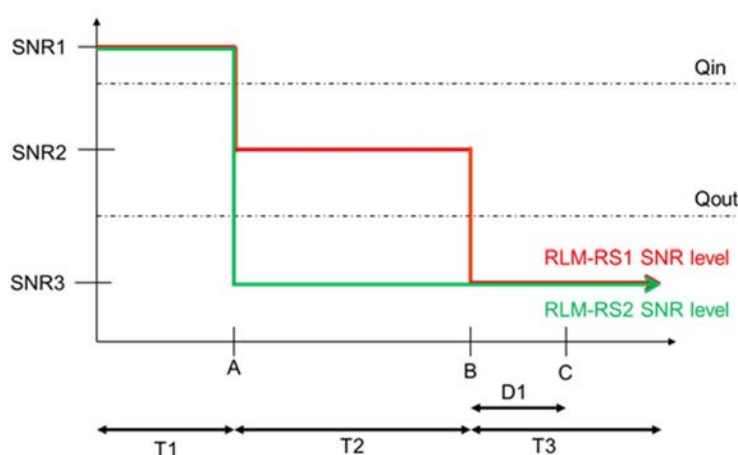


Figure A.17.5.1.7.1-1: SNR variation for CSI-RS out-of-sync testing

A.17.5.1.7.2 Test Requirements

The UE behaviour during time durations T1, T2, and T3 shall be as follows:

During time durations T1, T2 and T3, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on PCell.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 (PCell) at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

The UE shall stop transmitting uplink signal in Cell 1 (PCell) no later than time point C (D_1 second after the start of the time duration T3) on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.1.8 Radio Link Monitoring In-sync Test for FR2 PCell configured with CSI-RS-based RLM in DRX mode

A.17.5.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects the in sync for the purpose of monitoring downlink CSI-RS based radio link quality of the PCell when DRX is used. This test will partly verify the FR2 PCell CSI-RS In-sync radio link monitoring requirements in clause 8.1B.

The test parameters are given in Tables A.17.5.1.8.1-1, A.17.5.1.8.1-2, A.17.5.1.8.1-3 and A.17.5.1.8.1-4 below. There is one cells, cell 1 which is the PCell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.17.5.1.8.1-1 shows the variation of the downlink SNR in the PCell to emulate out-of-sync and in-sync states. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 10 ms. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test. In the test, SSB0 and SSB1 are configured as BFD-RS.

Table A.17.5.1.8.1-1: Supported test configurations for FR2 PSCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.17.5.1.8.1-2: General test parameters for FR2 PCell for CSI-RS in-sync testing in non-DRX mode

Parameter		Unit	Value
			Test 1
Active PCell			Cell 1
RF Channel Number			1
Duplex mode	Config 1		TDD
TDD Configuration	Config 1		TDDConf.3.1
DL initial BWP configuration	Config 1		DLBWP.0.1
DL dedicated BWP configuration	Config 1		DLBWP.1.1
UL initial BWP configuration	Config 1		ULBWP.0.1
UL dedicated BWP configuration	Config 1		ULBWP.1.1
RMSI CORESET Reference Channel	Config 1		CR.3.1 TDD
Dedicated CORESET Reference Channel	Config 1		CCR.3.1 TDD CCR.3.3 TDD
SSB Configuration	Config 1		SSB.1 FR2
SMTc Configuration	Config 1		SMTc.1
PDSCH/PDCCH subcarrier spacing	Config 1		120 KHz
CSI-RS for RLM	Config 1		Resource #4 in TRS.2.1 TDD Resource #4 in TRS.2.2 TDD
TRS configuration			TRS.2.1 TDD TRS.2.2 TDD
TCI configuration for PDCCH#1/PDSCH			TCI.State.2
TCI configuration for PDCCH#2			TCI.State.3
OCNG parameters			OP.1
CP length			Normal
	DCI format		1-0

Out of sync transmission parameters	Number of Control OFDM symbols		2
	Aggregation level	CCE	8
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	4
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	4
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
In sync transmission parameters	DCI format		1-0
	Number of Control OFDM symbols		2
	Aggregation level	CCE	4
	Ratio of hypothetical PDCCH RE energy to average CSI-RS RE energy	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average CSI-RS RE energy	dB	0
	DMRS precoder granularity		REG bundle size
	REG bundle size		6
DRX			DRX.3
Gap pattern ID			*gp0
Layer 3 filtering			Enabled
T310 timer		ms	2000
T311 timer		ms	1000
N310			1
N311			1
CSI-RS for CSI reporting	Config 1		CSI-RS.3.1 TDD
reportConfigType			periodic
reportQuantity			cri-RI-PMI-CQI
CSI reporting periodicity		slot	40
CSI reporting offset		slot	4
T1		s	0.2
T2		s	0.2
T3		s	1.64
T4		s	0.2
T5		s	1.88
D1		s	1.84
Note 1: UE-specific PDCCH is not transmitted after T1 starts.			

Table A.17.5.1.8.1-3: Cell specific test parameters for FR2 for CSI-RS in-sync radio link monitoring in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup	dB	Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	4				
EPRE ratio of PDCCH to PDCCH DMRS	dB	0				
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					

EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS							
EPRE ratio of OCNG DMRS to SSS							
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR on RLM-RS1	Config 1	dB	2 ^{Note 11}	-6 ^{Note 11}	-15	-4.5	2 ^{Note 11}
SNR on RLM-RS2	Config 1	dB	2 ^{Note 11}	-15	-15	-15	-15
N_{oc}	Config 1	dBm/15KHz	-104.7				
Propagation condition			TDL-C 300ns 100Hz				
Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.							
Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.							
Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.							
Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.							
Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.							
Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2, SNR3, SNR4 and SNR5 respectively in figure A.17.5.1.8.1-1.							
Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band..							
Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.							
Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.							

Table A.17.5.1.8.1-4: Measurement gap configuration for FR2 CSI-RS in-sync radio link monitoring in non-DRX mode

Field	Test 1
	Value
gapOffset	0
Note 1: RLM RS is partially overlapped with measurement gap	

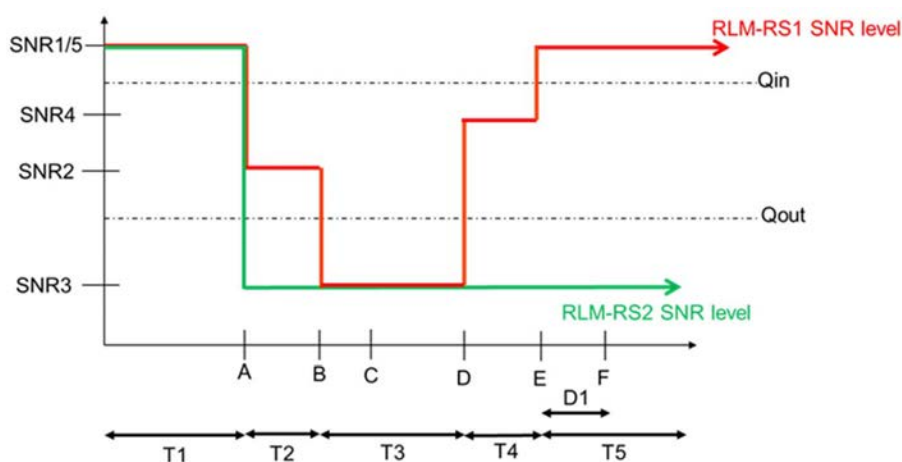


Figure A.17.5.1.8.1-1: SNR variation for CSI-RS in-sync testing

A.17.5.1.8.2 Test Requirements

The UE behaviour in each test during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the period from time point A to time point F (D1 second after the start of time duration T5) the UE shall transmit uplink signal at least in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting on the PCell.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.1.9 UE Radio Link Monitoring Scheduling Restrictions on FR2

A.17.5.1.9.1 Test Purpose and Environment

The purpose is to verify that the NR UE correctly follows the RLM scheduling restrictions requirements defined in clause 8.1B.7. This test verifies that the UE correctly receive the PDCCH scheduled on the symbols right before the RLM SSB symbols without overlap so that it sends ACK/NACK correctly. The test case is only applicable to UE which supports pdcch-MonitoringAnyOccasions or pdcch-MonitoringAnyOccasionsWithSpanGap.

The test parameters are given in table A.17.5.1.9.1-1, table A.17.5.1.9.1-2 and table A.17.5.1.9.1-3 below. The UE is required during time period T1 to transmit ACK/NACK correctly upon scheduling of PDSCH.

Table A.17.5.1.9.1-1: Supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 120 kHz RMC SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.5.1.9.1-2: General test parameters for NR RLM scheduling restriction test case in FR2

Parameter	Unit	Test configuration	Value	Comment
RF Channel Number		1	1	
SSB configuration		1	SSB.1 FR2	
SMTC configuration		1	SMTC.3	
DRX cycle length	s	1	OFF	

T1	s	1	5	During T1 the UE is required to correctly transmit ACK/NACK
----	---	---	---	---

Table A.17.5.1.9.1-3: Cell specific test parameters for NR RLM scheduling restriction test case in FR2

Parameter	Unit	Test configuration	Cell 1	
AoA setup		1	Setup 3 defined in A.3.15.3	
			AoA1	AoA2
Assumption for UE beams ^{Note 1}			Rough	Rough
TDD configuration		1	TDDConf.3.1	
BW _{channel}	MHz	1	100: N _{RB,c} = 66	
Data RBs allocated		1	24	
PDSCH Reference measurement channel		1	SR.3.2 TDD	Not sent
RMSI CORESET RMC configuration		1	CR.3.1 TDD	Not sent
Dedicated CORESET RMC configuration		1	CCR.3.2 TDD	Not sent
TRS configuration		1	TRS.2.1 TDD	TRS.2.2 TDD
PDCCH/PDSCH TCI state		1	TCI.State.2	N/A
OCNG Pattern		1	OP.5 defined in A.3.2.1	Not sent
Initial DL BWP configuration		1	DLBWP.0.1	
Initial UL BWP configuration		1	ULBWP.0.1	
RLM-RS		1	SSB with index 0	SSB with index 1
N _{oc}	dBm/15kHz	1	-92.1	-92.1
N _{oc} ^{Note2}	dBm/SCS	1	-83.1	-83.1
$\hat{E}_s / N_{oc}$	dB	1	2	2
$\hat{E}_s / I_{ot_BB}$ ^{Note 4}	dB	1	1	1
SSB _{RP} ^{Note3}	dBm/SCS	1	-81.1	-81.1
I _o	dBm/95.04 MHz	1	-54.35	-54.35
Time multiplexing of the downlink transmissions from each AoA		1	Defined in Figure A.17.5.1.9.1-1	
Propagation Condition		1	AWGN	AWGN
Note 1: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation. Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power N_{oc} for N_{oc} to be fulfilled. Note 3: Es/I_{ot}, SSB_{RP} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Calculation of Es/I_{ot_{BB}} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMBs from TS 38.101-2 [19] Table 6.2.1.3-4.				

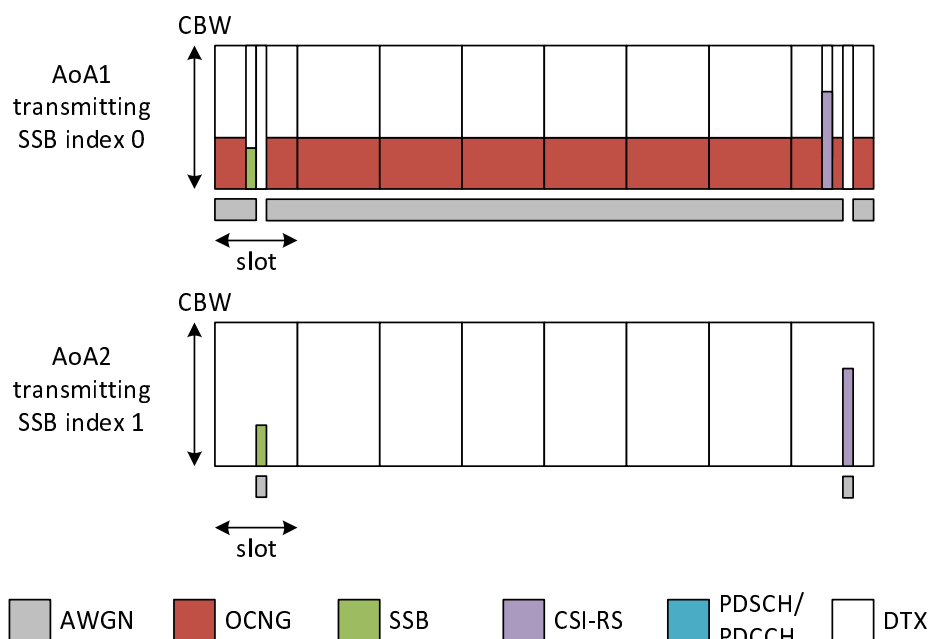


Figure A.17.5.1.9.1-1: Time multiplexed downlink transmissions

A.17.5.1.9.2 Test Requirements

The UE behaviour follows the requirements defined in clause 8.1B.7.3.

A.17.5.2 Beam Failure Detection and Link recovery procedures

A.17.5.2.1 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode

A.17.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5B.

The test parameters are given in Tables A.17.5.2.1.1-1, A.17.5.2.1.1-2 and A.17.5.2.1.1-3 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.17.5.2.1.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.17.5.2.1.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled. The UE is configured to perform inter-frequency measurements using GP ID #0 (40ms) in test 1.

Table A.17.5.2.1.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.17.5.2.1.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active PCell		1		Cell 1	
RF Channel Number		1		1	
Duplex mode		1		TDD	
TDD Configuration		1		TDDConf.3.1	
BW _{channel}		1		100: N _{RB,c} = 66	
Data RBs allocated		1		66	
PDSCH/PDCCH subcarrier spacing		1	kHz	120	
DL initial BWP configuration		1		DLBWP.0.1	
DL dedicated BWP configuration		1		DLBWP.1.1	
UL initial BWP configuration		1		ULBWP.0.1	
UL dedicated BWP configuration		1		ULBWP.1.1	
PDSCH Reference Channel		1		SR.3.2 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
OCNG parameters		1		OP.1	
CP length		1		Normal	
PDSCH/PDCCH TCI state		1		TCI.State.0	
CSI-RS for tracking		1		TRS.2.1 TDD	
SSB Configuration		1		SSB.1 FR2	
SMTC Configuration		1		SMTC.3	
PRACH Configuration		1		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration		1		OFF	
SSB index assigned as BFD RS (q ₀)		1		0	
SSB index assigned as CBD RS (q ₁)		1		1	
SSB index assigned as RLM RS		1		0,1	
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	
	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	
Gap pattern ID		1		gp0	
gapOffset		1	ms	0	
rlmInSyncOutOfSyncThreshold		1		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB		1	dBm/SCS	-95	Threshold used for Q _{in_LR_SSB}

powerControlOffsetSS	1		db0	Used for deriving rsrp-ThresholdCSI- RS
beamFailureInstanceMaxCount	1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1		CSI-RS.3.1 TDD	
reportConfigType	1		periodic	
reportQuantity	1		cri-RI-PMI-CQI	
CSI reporting periodicity	1	slot	40	
CSI reporting offset	1	slot	4	
T310	1	ms	1000	
N310	1		2	
T1	1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1	s	2.61	
T3	1	s	1.64	
T4	1	s	0	
T5	1	s	1.01	
D1	1	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.17.5.2.1.1-3: Cell specific test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					
SNR _{SSB} of set q_0	dB	5 ^{Note 11}	-3 ^{Note 11}	-12	-12	-12
SNR _{SSB} of set q_1	dB	0.2	0.2	20.2	20.2	20.2
SSB _{RP} of set q_1	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	dBm/120 KHz	-104.7				
Propagation condition		TDL-A 30ns 75Hz				

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Measurement gap configuration is assigned to the UE prior to the start of time period T1.
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
- Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.17.5.2.1.1-1.
- Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.
- Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
- Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

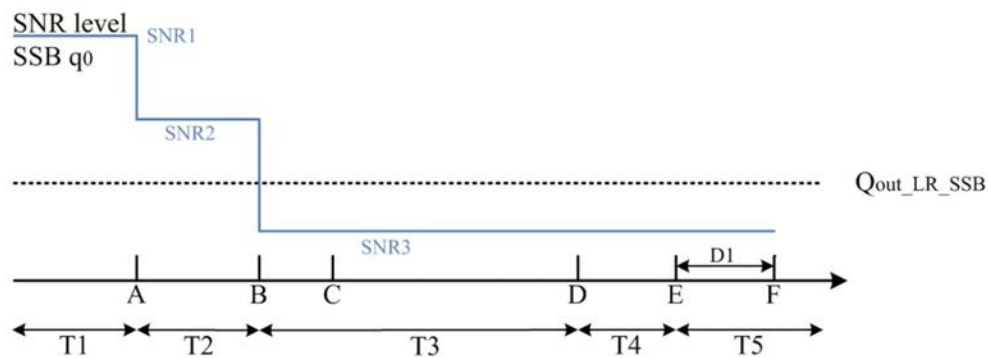


Figure A.17.5.2.1.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

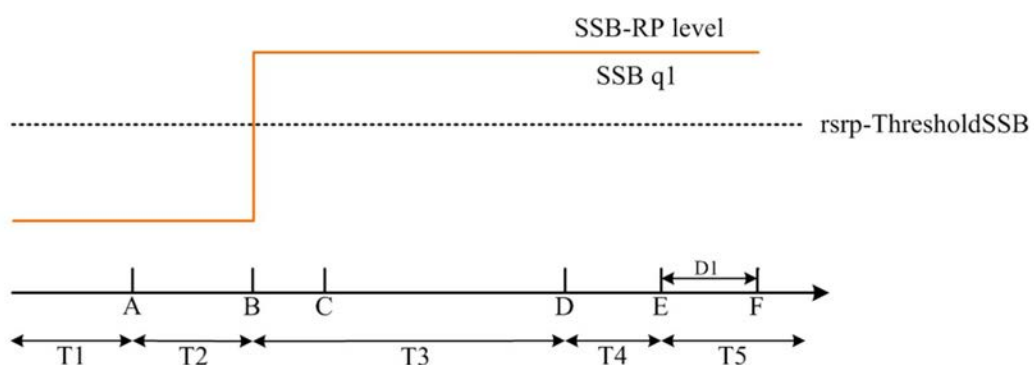


Figure A.17.5.2.1.1-2: SSB_RP level variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.17.5.2.1.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 960 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.2.2 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with SSB-based BFD and LR in DRX mode

A.17.5.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects SSB-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct SSB-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the SSB based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5.

The test parameters are given in Tables A.17.5.2.2.1-1, A.17.5.2.2.1-2 and A.17.5.2.2.1-3 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.17.5.2.2.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.17.5.2.2.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.17.5.2.2.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.17.5.2.2.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1		Cell 1	
RF Channel Number	1		1	
Duplex mode	1		TDD	

TDD Configuration	1		TDDConf.3.1	
BW _{channel}	1		100: N _{RB,c} = 66	
Data RBs allocated	1		66	
PDSCH/PDCCH subcarrier spacing	1	kHz	120	
DL initial BWP configuration	1		DLBWP.0.1	
DL dedicated BWP configuration	1		DLBWP.1.1	
UL initial BWP configuration	1		ULBWP.0.1	
UL dedicated BWP configuration	1		ULBWP.1.1	
PDSCH Reference Channel	1		SR.3.2 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	
OCNG parameters	1		OP.1	
CP length	1		Normal	
PDSCH/PDCCH TCI state	1		TCI.State.0	
CSI-RS for tracking	1		TRS.2.1 TDD	
SSB Configuration	1		SSB.1 FR2	
SMTC Configuration	1		SMTC.3	
PRACH Configuration	1		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration	1		DRX.3	A.3.3.3
SSB index assigned as BFD RS (q ₀)	1		0	
SSB index assigned as CBD RS (q ₁)	1		1	
SSB index assigned as RLM RS	1		0,1	
Beam failure detection transmission parameters	DCI format	1	1-0	
	Number of Control OFDM symbols	1	2	
	Aggregation level	1	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0
	DMRS precoder granularity	1		REG bundle size
	REG bundle size	1		6
Gap pattern ID	1		N/A	
rlmInSyncOutOfSyncThreshold	1		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1	dBm/SCS	-95	Threshold used for Q _{in_LR_SSB}
powerControlOffsetSS	1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1		CSI-RS.3.1 TDD	
reportConfigType	1		periodic	
reportQuantity	1		cri-RI-PMI-CQI	
CSI reporting periodicity	1	slot	40	
CSI reporting offset	1	slot	4	
T310	1	ms	1000	
N310	1		2	

T1	1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1	s	3.37	
T3	1	s	2.8	
T4	1	s	0	
T5	1	s	0.61	
D1	1	s	0.57	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.17.5.2.2.1-3: Cell specific test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 9}		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					
EPRE ratio of PDSCH to PDSCH DMRS	dB					
EPRE ratio of OCNG DMRS to SSS	dB					
EPRE ratio of OCNG to OCNG DMRS	dB					
SNR _{SSB} of set q_0	dB	5 ^{Note 10}	-3 ^{Note 10}	-12	-12	-12
SNR _{SSB} of set q_1	dB	0.2	0.2	20.2	20.2	20.2
SSB _{RP} of set q_1	dBm/SCS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	dBm/120 KHz	-104.7				
Propagation condition		TDL-A 30ns 75Hz				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.					
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.					
Note 4:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.					
Note 5:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.					
Note 6:	SNR levels correspond to the signal to noise ratio over the SSS REs.					
Note 7:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.17.5.2.1.1-1.					
Note 8:	The SNR values are specified for testing a UE which supports 2RX on at least one band.					
Note 9:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.					
Note 10:	This value allows up to 1dB degradation from applied SNR to UE baseband.					

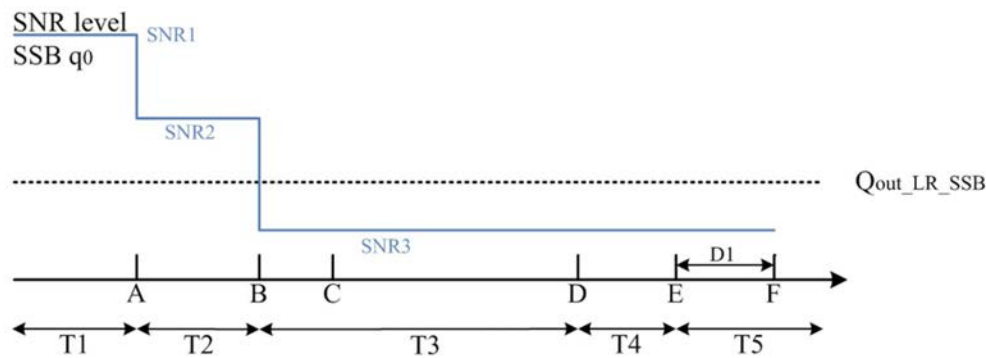


Figure A.17.5.2.2.1-1: SNR variation for SSB-based beam failure detection and link recovery testing in DRX mode

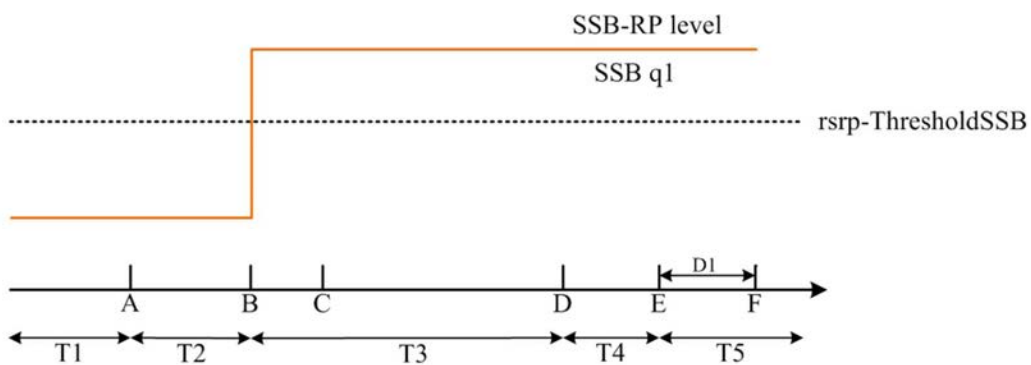


Figure A.17.5.2.2.1-2: SSB_RP level variation for SSB-based beam failure detection and link recovery testing in DRX mode

A.17.5.2.2.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 560 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.2.3 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in non-DRX mode

A.17.5.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when no DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5B.

The test parameters are given in Tables A.17.5.2.3.1-1, A.17.5.2.3.1-2, and A.17.5.2.3.1-3 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.17.5.2.3.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.17.5.2.3.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is not enabled.

Table A.17.5.2.3.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.17.5.2.3.1-2: General test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1		Cell 1	
RF Channel Number	1		1	
Duplex mode	1		TDD	
TDD Configuration	1		TDDConf.3.1	
BW _{channel}	1		100: N _{RB,c} = 66	
Data RBs allocated	1		66	
PDSCH/PDCCH subcarrier spacing	1	kHz	120	
DL initial BWP configuration	1		DLBWP.0.1	
DL dedicated BWP configuration	1		DLBWP.1.1	
UL initial BWP configuration	1		ULBWP.0.1	
UL dedicated BWP configuration	1		ULBWP.1.1	
PDSCH Reference Channel	1		SR.3.2 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	
OCNG parameters	1		OP.1	
CP length	1		Normal	
PDSCH/PDCCH TCI state	1		TCI.State.0	
CSI-RS for tracking	1		TRS.2.1 TDD	
SSB Configuration	1		SSB.1 FR2	
SMTC Configuration	1		SMTC.3	
PRACH Configuration	1		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration	1		OFF	
CSI-RS configuration for BFD/CBD/RLM	1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)	1		0	
CSI-RS index assigned as CBD RS (q_1)	1		1	

CSI-RS index assigned as RLM RS	1		0,1	
Beam failure detection transmission parameters	DCI format	1	1-0	
	Number of Control OFDM symbols	1	2	
	Aggregation level	1	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0
	DMRS precoder granularity	1		REG bundle size
	REG bundle size	1		6
Gap pattern ID	1		N/A	
rlmInSyncOutOfSyncThreshold	1		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS	1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType	1		periodic	
reportQuantity	1		cri-RI-PMI-CQI	
CSI reporting periodicity	1	slot	40	
CSI reporting offset	1	slot	4	
T310	1	ms	1000	
N310	1		2	
T1	1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1	s	1.17	
T3	1	s	0.9	
T4	1	s	0	
T5	1	s	0.31	
D1	1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.17.5.2.3.1-3: Cell specific test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Unit	Test 1				
		T1	T2	T3	T4	T5
AoA setup		Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}		Rough				
EPRE ratio of PDCCH DMRS to SSS	dB	0				
EPRE ratio of PDCCH to PDCCH DMRS	dB					
EPRE ratio of PBCH DMRS to SSS	dB					
EPRE ratio of PBCH to PBCH DMRS	dB					
EPRE ratio of PSS to SSS	dB					
EPRE ratio of PDSCH DMRS to SSS	dB					

EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5 Note 11	-3 Note 11	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1	dBm/S CS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1	dBm/12 0 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				
Note 1:	OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2:	The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 3:	NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.						
Note 4:	Void						
Note 5:	The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.						
Note 6:	The signal contains PDCCH for UEs other than the device under test as part of OCNG.						
Note 7:	SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.						
Note 8:	The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.3.1-1.						
Note 9:	The SNR values are specified for testing a UE which supports 2RX on at least one band.						
Note 10:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.						
Note 11:	This value allows up to 1dB degradation from applied SNR to UE baseband						

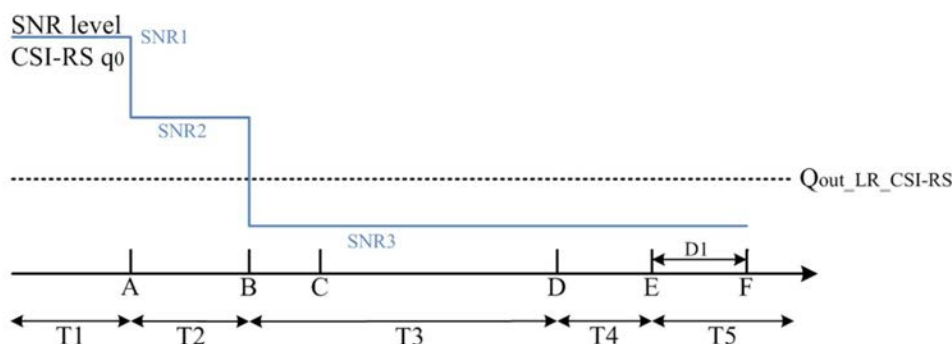


Figure A.17.5.2.3.1-1: SNR variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

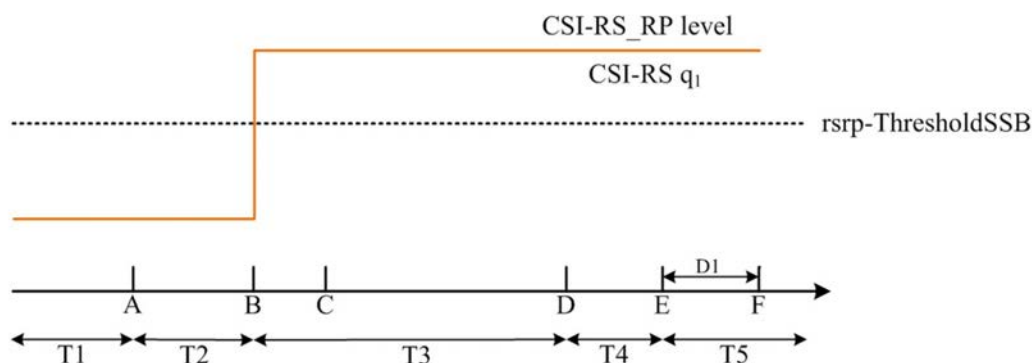


Figure A.17.5.2.3.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing in non-DRX mode

A.17.5.2.3.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluate beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.2.4 Beam Failure Detection and Link Recovery Test for FR2 PCell configured with CSI-RS-based BFD and LR in DRX mode

A.17.5.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE properly detects CSI-RS-based beam failure in the set q_0 configured for a serving cell and that the UE performs correct CSI-RS-based link recovery based on beam candidate set q_1 . The purpose is to test the downlink monitoring for beam failure detection within the UEs active DL BWP, during the evaluation period, and link recovery, when DRX is used. This test will partly verify the CSI-RS based beam failure detection and link recovery for an FR2 serving cell requirements in clause 8.5B.

The test parameters are given in Tables A.17.5.2.4.1-1, A.17.5.2.4.1-2, A.17.5.2.4.1-3, and A.17.5.2.4.1-4 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.17.5.2.4.1-1 shows the variation of the downlink SNR of the CSI-RS in set q_0 in the active cell to emulate CSI-RS based beam failure. Figure A.17.5.2.4.1-2 shows the variation of the downlink L1-RSRP of the CSI-RS in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic

CSI reporting with a reporting periodicity of 5 ms. In the test, DRX configuration is enabled in PCell and DRX inactivity timer has already been expired, i.e. UE tries to decode PDCCH and to send periodic CQI during the period when On-duration timer is running. Time alignment timers shall be set to “infinity” so that UL timing alignment is maintained during the test.

Table A.17.5.2.4.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	TDD duplex mode, 120 kHz SSB SCS, 100 MHz bandwidth

Table A.17.5.2.4.1-2: General test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Test Config.	Unit	Value	Comment
				Test 1	
Active PCell		1		Cell 1	
RF Channel Number		1		1	
Duplex mode		1		TDD	
TDD Configuration		1		TDDConf.3.1	
BW_{channel}		1		100: $N_{RB,C} = 66$	
Data RBs allocated		1		66	
PDSCH/PDCCH subcarrier spacing		1	kHz	120	
DL initial BWP configuration		1		DLBWP.0.1	
DL dedicated BWP configuration		1		DLBWP.1.1	
UL initial BWP configuration		1		ULBWP.0.1	
UL dedicated BWP configuration		1		ULBWP.1.1	
PDSCH Reference Channel		1		SR.3.2 TDD	
RMSI CORESET Reference Channel		1		CR.3.1 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	
OCNG parameters		1		OP.1	
CP length		1		Normal	
PDSCH/PDCCH TCI state		1		TCI.State.0	
CSI-RS for tracking		1		TRS.2.1 TDD	
SSB Configuration		1		SSB.1 FR2	
SMTc Configuration		1		SMTc.3	
PRACH Configuration		1		FR2 PRACH configuration 4	A.3.8.3.4
DRX configuration		1		DRX.3	A.3.3.3
CSI-RS configuration for BFD/CBD/RLM		1		CSI-RS.3.2 TDD	A.3.14.2
CSI-RS index assigned as BFD RS (q_0)		1		0	
CSI-RS index assigned as CBD RS (q_1)		1		1	
CSI-RS index assigned as RLM RS		1		0,1	
Beam failure detection transmission parameters	DCI format	1		1-0	
	Number of Control OFDM symbols	1		2	
	Aggregation level	1	CCE	8	
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1	dB	0	
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1	dB	0	
	DMRS precoder granularity	1		REG bundle size	
	REG bundle size	1		6	

Gap pattern ID	1		N/A	
rlmInSyncOutOfSyncThreshold	1		absent	Value 0 is applied. (Table 8.1.1-1).
rsrp-ThresholdSSB	1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
powerControlOffsetSS	1		db0	Used for deriving rsrp-ThresholdCSI-RS
beamFailureInstanceMaxCount	1		n1	see TS 38.321 [7], clause 5.17
beamFailureDetectionTimer	1		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1		CSI-RS.3.1 TDD	A.3.14.2
reportConfigType	1		periodic	
reportQuantity	1		cri-RI-PMI-CQI	
CSI reporting periodicity	1	slot	40	
CSI reporting offset	1	slot	4	
T310	1	ms	1000	
N310	1		2	
T1	1	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1	s	5.43	
T3	1	s	5.16	
T4	1	s	0	
T5	1	s	0.31	
D1	1	s	0.27	
Note 1: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.17.5.2.4.1-3: Cell specific test parameters for FR2 PCell for CSI-RS-based beam failure detection and link recovery testing in DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA setup			Setup 1 defined in A.3.15				
Assumption for UE beams ^{Note 10}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_CSI-RS of set q_0	Config 1	dB	5 ^{Note 11}	-3 ^{Note 11}	-12	-12	-12
SNR_CSI-RS of set q_1	Config 1	dB	0.2	0.2	20.2	20.2	20.2
CSI-RS_RP of set q_1	Config 1	dBm/S CS	-104.5	-104.5	-84.5	-84.5	-84.5
N_{oc}	Config 1	dBm/12 0 KHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Void
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the REs carrying CSI-RS.
- Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.7.5.5.4.1-1.
- Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.
- Note 10: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.
- Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband

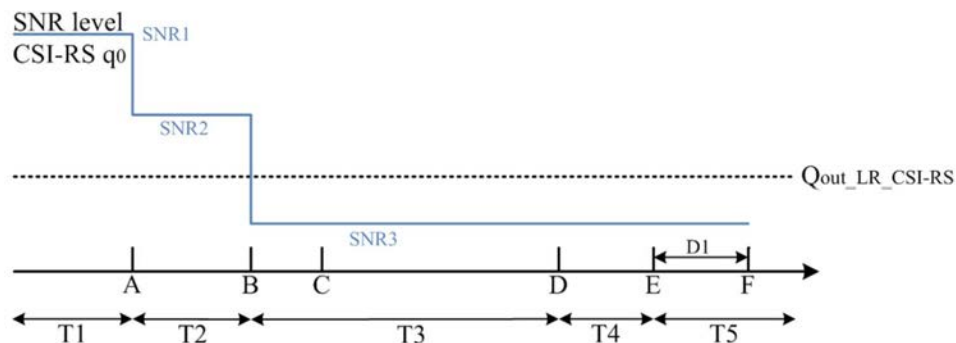


Figure A.17.5.2.4.1-1: SNR variation for CSI-RS-based beam failure detection and link recovery testing in DRX mode

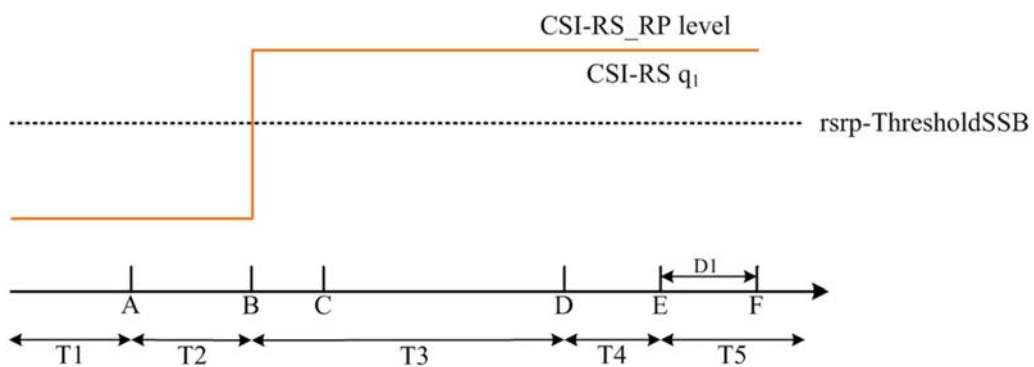


Figure A.17.5.2.4.1-2: CSI-RS_RP level variation for CSI-RS based beam failure detection and link recovery testing in DRX mode

A.17.5.2.4.2 Test Requirements

The UE behaviour during time durations T1, T2, T3, T4 and T5 shall be as follows:

During the time duration T1 and T2, the UE shall transmit uplink signal at least in all subframes configured for CSI transmission on Cell 1.

During the period from time point A to time point B the UE shall transmit uplink signal in Cell 1 in all uplink slots configured for CSI transmission according to the configured periodic CSI reporting for Cell 1.

During T3 the UE shall detect beam failure and initiate link recovery. During T4 and T5 the UE measures and evaluates beam candidate from beam candidate set q_1 .

No later than time point F occurring no later than $D1 = 260 + 10$ ms after the start of T5, the UE shall transmit preamble on a beam associated with the candidate beam set q_1 . The UE shall not transmit preamble on a beam associated with the candidate beam set q_1 earlier than time point B.

Test is concluded once the test equipment has received the initial preamble transmission from the UE. The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.2.5 Scheduling availability restriction during Beam Failure Detection and Link Recovery for FR2 PCell configured with SSB-based BFD and LR in non-DRX mode for 2 Rx UE

A.17.5.2.5.1 Test Purpose and Environment

The purpose is to test scheduling availability restrictions when the UE is performing beam failure detection or when the UE is performing L1-RSRP measurement for candidate beam detection, when no DRX is used. This test will verify the scheduling availability restriction requirements in clause 8.5B.7 and 8.5B.8.

The test parameters are given in Tables A.17.5.2.5.1-1, A.17.5.2.5.1-2 and A.17.5.2.5.1-3 below. There is one cell, cell 1 which is the active cell, in the test. The test consists of five successive time periods, with time duration of T1, T2, T3, T4 and T5 respectively. Figure A.17.5.2.5.1-1 shows the variation of the downlink SNR of the SSB in set q_0 in the active cell to emulate SSB based beam failure. Figure A.17.5.2.5.1-2 shows the variation of the downlink L1-RSRP of the SSB in set q_1 of the candidate beam used for link recovery. Prior to the start of the time duration T1, the UE shall be fully synchronized to cell 1. The UE shall be configured for periodic CSI reporting with a reporting periodicity of 5ms. This test will focus on the scheduling availability during beam failure detection) and candidate beam detection. In the test, DRX configuration is not enabled. Test is to test the scheduling availability restriction of UE performing beam failure detection and candidate beam detection when SSB RS configured for Beam failure detection and candidate beam detection. During the test the UE is scheduled to transmit continuously in UL.

Table A.17.5.2.5.1-1: Supported test configurations for FR2 PCell

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.17.5.2.5.1-2: General test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter	Test Config.	Unit	Value	Comment
			Test 1	
Active PCell	1-2		Cell 1	
RF Channel Number	1-2		1	
Duplex mode	1-2		TDD	
TDD Configuration	1-2		TDDConf.3.1	
BW _{channel}	1-2		100: N _{RB,C} = 66	

Data RBs allocated	1-2		66	
PDSCH/PDCCH subcarrier spacing	1-2	kHz	120	
DL initial BWP configuration	1-2		DLBWP.0.1	
DL dedicated BWP configuration	1-2		DLBWP.1.1	
UL initial BWP configuration	1-2		ULBWP.0.1	
UL dedicated BWP configuration	1-2		ULBWP.1.1	
PDSCH Reference Channel	1		SR.3.2 TDD	
	2		SR.3.3 TDD	
RMSI CORESET Reference Channel	1		CR.3.1 TDD	
	2		CR.3.2 TDD	
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD	
	2		CCR.3.7 TDD	
OCNG parameters	1-2		OP.1	
CP length	1-2		Normal	
PDSCH/PDCCH TCI state	1-2		TCI.State.0	
CSI-RS for tracking	1-2		TRS.2.1 TDD	
SSB Configuration	1		SSB.1 FR2	
	2		SSB.2 FR2	
SMTTC Configuration	1-2		SMTTC.1	
PRACH Configuration	1-2		FR2 PRACH configuration 2	A.3.8.3.2
DRX configuration	1-2		OFF	
SSB index assigned as BFD RS (q_0)	1-2		0	
SSB index assigned as CBD RS (q_1)	1-2		1	
Beam failure detection transmission parameters	DCI format	1-2	1-0	
	Number of Control OFDM symbols	1-2	2	
	Aggregation level	1-2	CCE	8
	Ratio of hypothetical PDCCH RE energy to average SSS RE energy	1-2	dB	0
	Ratio of hypothetical PDCCH DMRS energy to average SSS RE energy	1-2	dB	0
	DMRS precoder granularity	1-2		REG bundle size
	REG bundle size	1-2		6
Gap pattern ID	1-2		N/A	
$rlminSyncOutOfSyncThreshold$	1-2		absent	Value 0 is applied. (Table 8.1.1-1).
$rsrp-ThresholdSSB$	1	dBm/SCS	-95	Threshold used for $Q_{in_LR_SSB}$
	2		-92	
$powerControlOffsetSS$	1-2		db0	Used for deriving $rsrp-ThresholdCSI-RS$
$beamFailureInstanceMaxCount$	1-2		n1	see TS 38.321 [7], clause 5.17
$beamFailureDetectionTimer$	1-2		pbfd4	see TS 38.321 [7], clause 5.17
CSI-RS configuration for CSI reporting	1-2		CSI-RS.3.1 TDD	
$reportConfigType$	1-2		periodic	
$reportQuantity$	1-2		cri-RI-PMI-CQI	
CSI reporting periodicity	1-2	slot	40	

CSI reporting offset	1-2	slot	4	
T310	1-2	ms	1000	
N310	1-2		2	
T1	1-2	s	1	The UE shall be fully synchronized to cell 1 during T1
T2	1-2	s	2.6	
T3	1-2	s	1.64	
T4	1-2	s	0	
T5	1-2	s	1.01	
D1	1-2	s	0.97	
Note 1: All configurations are assigned to the UE prior to the start of time period T1.				
Note 2: UE-specific PDCCH is not transmitted after T1 starts.				

Table A.17.5.2.5.1-3: Cell specific test parameters for FR2 PCell for SSB-based beam failure detection and link recovery testing in non-DRX mode

Parameter		Unit	Test 1				
			T1	T2	T3	T4	T5
AoA Setup			Setup1 defined in A.3.15.1				
Assumption for UE beams ^{Note 10}			Rough				
EPRE ratio of PDCCH DMRS to SSS		dB	0				
EPRE ratio of PDCCH to PDCCH DMRS		dB					
EPRE ratio of PBCH DMRS to SSS		dB					
EPRE ratio of PBCH to PBCH DMRS		dB					
EPRE ratio of PSS to SSS		dB					
EPRE ratio of PDSCH DMRS to SSS		dB					
EPRE ratio of PDSCH to PDSCH DMRS		dB					
EPRE ratio of OCNG DMRS to SSS		dB					
EPRE ratio of OCNG to OCNG DMRS		dB					
SNR_SSB of set q_0	Config 1-2	dB	⁵ Note 11	⁻³ Note 11	-12	-12	-12
SNR_SSB of set q_1	Config 1-2	dB	0.2	0.2	20.2	20.2	20.2
SSB_RP of set q_1	Config 1	dBm/S	-104.5	-104.5	-84.5	-84.5	-84.5
	Config 2	CS	-101.5	-101.5	-81.5	-81.5	-81.5
N_{oc}	Config 1-2	dBm/12 0 kHz	-104.7				
Propagation condition			TDL-A 30ns 75Hz				

- Note 1: OCNG shall be used such that the resources in Cell 1 are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 2: The uplink resources for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 3: NZP CSI-RS resource set configuration for CSI reporting are assigned to the UE prior to the start of time period T1.
- Note 4: Void
- Note 5: The timers and layer 3 filtering related parameters are configured prior to the start of time period T1.
- Note 6: The signal contains PDCCH for UEs other than the device under test as part of OCNG.
- Note 7: SNR levels correspond to the signal to noise ratio over the SSS REs.
- Note 8: The SNR in time periods T1, T2, T3, T4 and T5 is denoted as SNR1, SNR2 and SNR3 respectively in figure A.17.5.2.5.1-1.
- Note 9: The SNR values are specified for testing a UE which supports 2RX on at least one band.
- Note 10: Information about types of UE beam given in B.2.1.3 and does not limit UE implementation or test system implementation
- Note 11: This value allows up to 1dB degradation from applied SNR to UE baseband.

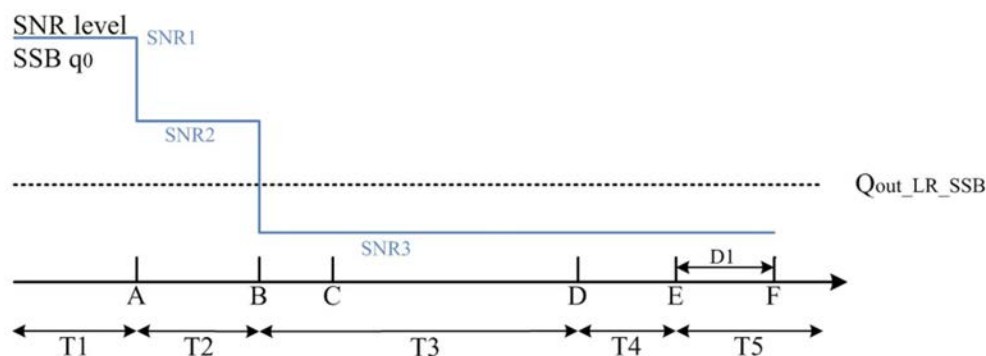


Figure A.17.5.2.5.1-1: SNR variation SSB for SSB-based beam failure detection and link recovery testing in non-DRX mode

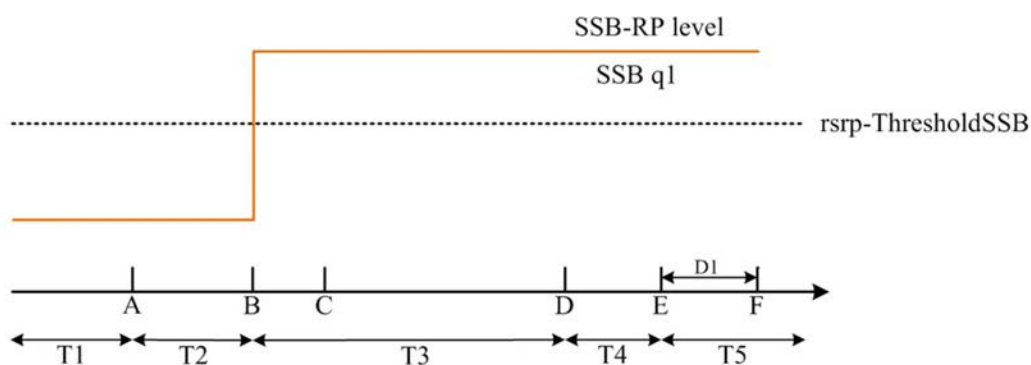


Figure A.17.5.2.5.1-2: SSB_RP level variation for SSB-based beam failure detection and link recovery testing in non-DRX mode

A.17.5.2.5.2 Test Requirements

The UE behaviour during time duration T3 follows the requirements defined in clause 8.5B.7.3:

- The UE is not expected to transmit PUCCH/PUSCH/SRS or receive PDCCH/PDSCH/CSI-RS for tracking/CSI-RS for CQI on BFD-RS symbols to be measured for beam failure detection.

The UE behaviour during time durations T4 and T5 follows the requirements defined in clause 8.5B.8.3:

- The UE is not expected to transmit PUCCH/PUSCH or receive PDCCH/PDSCH on reference symbols to be measured for candidate beam detection.

A.17.5.3 Active BWP switch for RedCap

A.17.5.3.1 DCI-based and Timer-based Active BWP Switch

A.17.5.3.1.1 NR FR2 DL active BWP switch with non-DRX in SA

A.17.5.3.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement defined in clause 8.6A. Supported test configurations are shown in Table A.17.5.3.1.1.1-1.

The test scenario comprises of one cell (Cell 1) as given in Table A.17.5.3.1.1.1-2. Cell-specific parameters of NR PCell is specified in Table A.17.5.3.1.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.17.5.3.1.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with 2 different UE-specific downlink bandwidth parts, BWP-1 and BWP-2 before starting the test. BWP-1 include bandwidth of the initial DL BWP and SSB.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1.
- UE is configured with a *bwp-InactivityTimer* timer value for Cell1.

All cells have constant signal levels throughout the test.

The test consists of 3 successive time periods, with durations of T1, T2, and T3, respectively.

During T1,

Time period T1 starts when a DCI format 1_1 command for DL BWP switch, sent from the test equipment to the UE, is received at the UE side in Cell 1's slot # denoted i . The UE should switch its bandwidth part from BWP-1 to BWP-2.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell 1's DL slot ($i + T_{BWPswitchDelay}$) as defined in clause 8.6A and starts to report valid ACK/NACK for the Cell 1 no later than the first UL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay} + kI$). The UE shall be continuously scheduled on Cell 1's BWP-2 starting from the first DL slot that occurs after the beginning of slot ($i + T_{BWPswitchDelay}$).

During T2, the test equipment won't transmit DCI format for PDSCH reception on Cell 1.

During T3,

The time period T3 starts from the slot # j , where j is the first slot of the half subframe immediately after *bwp-InactivityTimer* timer expires. The UE should switch its bandwidth part from BWP-2 back to the default bandwidth part – BWP-1.

The UE shall be able to receive PDSCH on the first DL slot that occurs after the beginning of Cell 1's DL slot ($j + T_{BWPswitchDelay}$) as defined in clause 8.6A and starts to report valid ACK/NACK for the Cell 1 at latest on the first UL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay} + kI$). The UE shall be continuously scheduled on Cell 1's BWP-1 starting from the first DL slot that occurs after the beginning of slot ($j + T_{BWPswitchDelay}$).

The test equipment verifies the DL BWP switch time by counting the slots from the time when the BWP switch command is received or *bwp-InactivityTimer* timer expires till an ACK is received.

Table A.17.5.3.1.1.1-1: DL BWP switch supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.5.3.1.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active Cell		Cell 1	Cell on RF channel number 1.
CP length		Normal	
DRX		OFF	
<i>bwp-InactivityTimer</i>	ms	[200]	
T1	s	[0.2]	
T2	s	[0.2]	
T3	s	[0.2]	

Table A.17.5.3.1.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		100 MHz: N _{RB,C} = 66
Active BWP ID		1, 2
Initial DL BWP Configuration		DLBWP.0.2 ^{Note 2}
Active DL BWP-1 Configuration		DLBWP.1.1 ^{Note 2}
Active DL BWP-2 Configuration		DLBWP.1.2 REDCAP ^{Note 2}
Initial UL BWP Configuration		ULBWP.0.2 ^{Note 2}
Active UL BWP-1 Configuration		ULBWP.1.1 ^{Note 2}
Active UL BWP-2 Configuration		DLBWP.1.2 REDCAP ^{Note 2}
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State		TCI.State.0
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0

EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.2 REDCAP is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].		

Table A.17.5.3.1.1.1-4: OTA related test parameters for DL BWP switch in SA

Parameter	Unit	Cell 2
Angle of arrival configuration		Setup 1 defined in clause A.3.15.1
Assumption for UE beams ^{Note 6}		Fine
N_{oc} ^{Note 1}	dBm/15 kHz	-112
N_{oc} ^{Note 1}	dBm/SCS	-103
SS-RSRP ^{Note 2}	dBm/120 kHz ^{Note 3}	-85
$\hat{E}_s/I_{ot}$	dB	18
$\hat{E}_s/N_{oc}$ ^{Note 5}	dB	18
I_o ^{Note 2}	dBm/95.04 MHz ^{Note 4}	-56
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.		
Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.		
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone		
Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone.		
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.		

A.17.5.3.1.1.2 Test Requirements

During T1, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$.

During T3, the UE shall start to send the ACK/NACK for PCell from the first UL slot that occurs after the beginning of DL slot $(j + T_{BWPswitchDelay} + k1)$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

Depending on UE capability *bwp-SwitchingDelay* [2], UE shall finish BWP switch within the time duration $T_{BWPswitchDelay}$ defined in Table 8.6A.2-1.

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: During T1, T3 if there are no uplink resources for reporting the ACK/NACK in the first UL slot that occurs after the beginning of DL slot $(i + T_{BWPswitchDelay} + k1)$, $(j + T_{BWPswitchDelay} + k1)$, then the UE shall use the next available uplink resource for reporting the corresponding ACK/NACK.

A.17.5.3.2 RRC-based Active BWP Switch

A.17.5.3.2.1 NR FR2 DL active BWP switch of PCell with non-DRX in SA

A.17.5.3.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the DL BWP switch delay requirement for RRC-based BWP switch defined in clause 8.6A.3. Supported test configurations are shown in Table A.17.5.3.2.1.1-1.

The test scenario comprises of one Cell (Cell 1) as given in Table A.17.5.3.2.1.1-2. Cell-specific parameters of Cell 1 are specified in Table A.17.5.3.2.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on Cell 1 to ensure that the UE will have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1.
- UE is indicated in *firstActiveDownlinkBWP-Id* that the active DL BWP is BWP-1 of initial condition in Cell 1.

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated bandwidth part configuration, sent from the test equipment to the UE, is received at the UE side in PSCell's slot # denoted i . The UE shall reconfigure its bandwidth part with the updated bandwidth part BWP-1 of final condition.

The UE shall be able to completely receive PDSCH on Cell 1 from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$ as defined in clause 8.6A.3 and starts to report valid ACK/NACK for the Cell 1 from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length} + k1$. The UE shall be continuously scheduled on PSCell's BWP-1 starting from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{BWPswitchDelayRRC}}{NR\ Slot\ length}$.

$T_{RRCprocessingDelay}$ and $T_{BWPswitchDelayRRC}$ are defined in clause 8.6A.3.

The test equipment verifies the DL BWP switch time in PSCell by counting the time from the time when the RRC Reconfiguration message including updated BWP configuration is sent till the time when RRC Reconfiguration Complete message is received.

Table A.17.5.3.2.1.1-1: DL BWP switch supported test configurations

Config	Description
--------	-------------

1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.17.5.3.2.1.1-2: General test parameters for DL BWP switch in SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	
T1	s	[0.2]	

Table A.17.5.3.2.1.1-3: NR Cell specific test parameters for DL BWP switch in SA

Parameter		Unit	Cell 1
Frequency Range			FR2
Duplex mode			TDD
TDD configuration			TDDConf.3.1
BW _{channel}			100 MHz: N _{RB,c} = 66
Active BWP ID			1
Initial Condition	Active DL BWP-1 Configuration		DLBWP.1.2 REDCAP
	Active UL BWP-1 Configuration		ULBWP.1.3
Final Condition	Active DL BWP-1 Configuration		DLBWP.1.1
	Active UL BWP-1 Configuration		ULBWP.1.1
'PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	For unpaired spectrum, a DL BWP is linked with an UL BWP. DLBWP.0.2 is linked with ULBWP.0.2; DLBWP.1.1 is linked with ULBWP.1.1; DLBWP.1.2 REDCAP is linked with ULBWP.1.3 defined in clause 12 of TS 38.213 [3].

Table A.17.5.3.2.1.1-4: OTA related test parameters for BWP switching test case

Parameter		Unit	Cell 2
Angle of arrival configuration			Setup 1 according to table A.3.15
Assumption for UE beams ^{Note 5}			Fine
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/15kHz	-112
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
N_{oc} ^{Note1}	NR_TDD_FR2_A	dBm/SCS	-103
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
SS-RSRP ^{Note2}	NR_TDD_FR2_A	dBm/SCS ^{Note3}	-85
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
$\hat{E}_s/I_{ot}$		dB	18
I_o ^{Note2}	NR_TDD_FR2_A	dBm/95.04 MHz ^{Note4}	-56
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
	NR_TDD_FR2_Y		
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 2: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.			
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone			

Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.

A.17.5.3.2.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell from the first DL slot that occurs after the beginning of slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}}$ and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{BWPswitchDelayRRC}}}{\text{NR Slot length}} + k1$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed PCell active BWP switch delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.4 Active TCI state switch delay

A.17.5.4.1 MAC-CE based active TCI state switch

A.17.5.4.1.1 NR PCell FR2 active TCI state switch for a known TCI state

A.17.5.4.1.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10B.3. Supported test configuration is shown in Table A.17.5.4.1.1.1-1.

The test scenario comprises of one NR PCell (Cell 1) as given in Table A.17.5.4.1.1.1-2. Cell-specific parameters of NR PCell are specified in Table A.17.5.4.1.1.1-3 below. The OTA related test parameters for FR2 are shown in Table A.17.5.4.1.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 2 different TCI states for PCell, PDCCH TCI state 0 (QCL'd to SSB0) and TCIstate 1 (QCL'd to SSB1), in Cell 1 before starting the test.
- UE is indicated in TCI state 0 as the active PDCCH TCI state

The test consists of two time periods, T1 and T2. Figure A.17.5.4.1.1.1-1 and Figure A.17.5.4.1.1.1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which PDCCH-TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI state 1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a MAC-CE command indicating a switch to TCI state 1. *tci-PresentInDCI* is not configured in the PDSCH configuration, i.e. TCI state for the PDSCH is identical to the PDCCH TCI state.

The test equipment verifies that UE can be scheduled on PCell on TCI state 0 till $n + T_{\text{HARQ}} + 3$ ms. The test equipment also verifies the TCI state switch time in PCell by scheduling the UE on TCI state 1 after $n + T_{\text{HARQ}} + 3$ ms + ($T_{\text{first-SSB}} + T_{\text{SSB-proc}}$).

Table A.17.5.4.1.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.5.4.1.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	0.2	

Table A.17.5.4.1.1.1-3: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		100 MHz: N _{RB,C} = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TCI.State.0
TCI State 1		TCI.State.1
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		No external noise (Note 2)
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38]..		

Table A.17.5.4.1.1.1-4: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 1	
		SSB0	SSB1

		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams Note 6		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SSB _{RP} Note 2	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s/I_{otBB}$ Note 7	dB	8.3	8.3	-Infinity	8.3
I_{o} Note2	dBm/95.04 MHz Note4	-56.0	-56.0	- Infinity	-56.0
Note 1:	Void				
Note 2:	SS B _{RP} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	Void				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	As observed with 0dBi gain antenna at the center of the quiet zone.				
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				
Note 7:	Calculation of E_s/I_{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.				

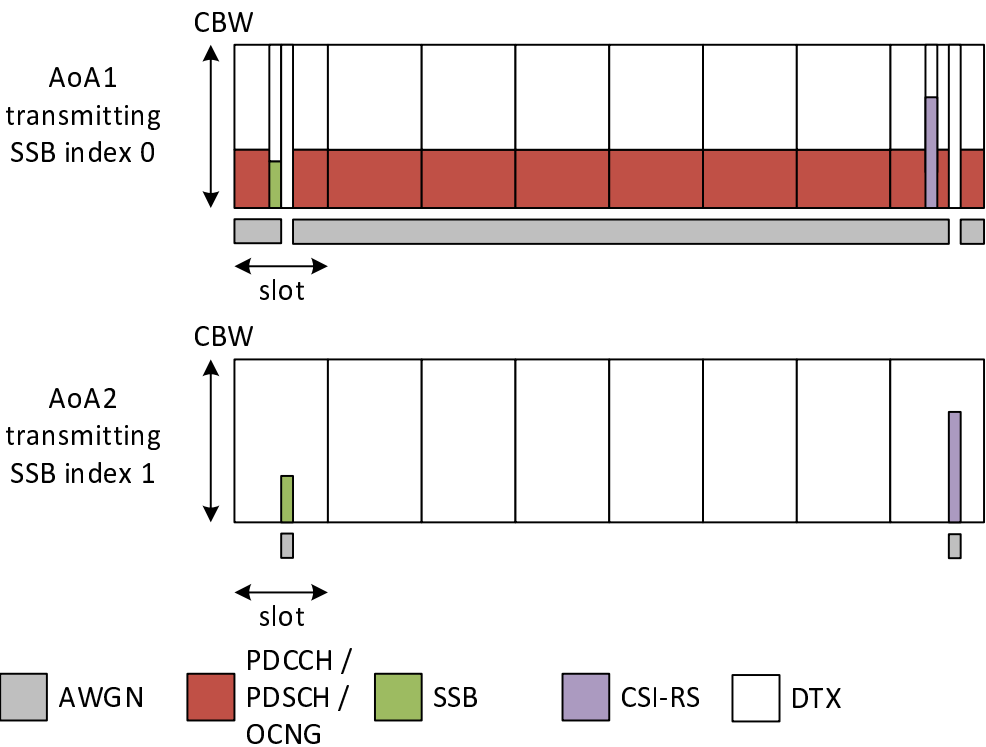


Figure A.17.5.4.1.1.1-1: Time multiplexed downlink transmissions during T1

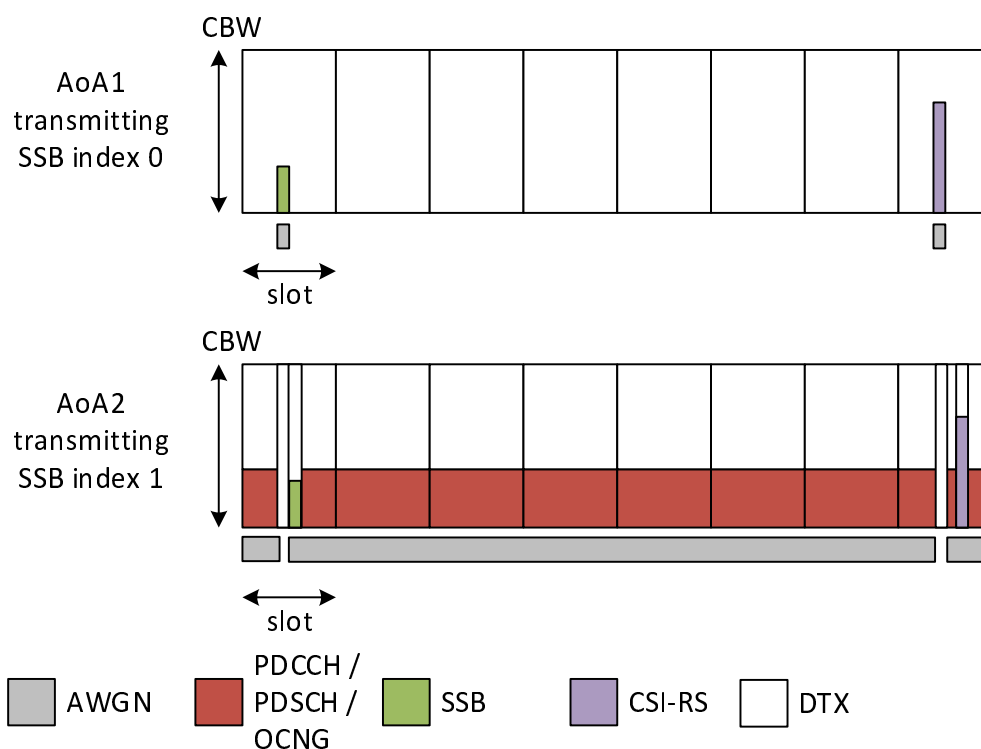


Figure A.17.5.4.1.1-2: Time multiplexed downlink transmissions during T2

A.17.5.4.1.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with results for both SSB0 and SSB1.

After receiving MAC-CE command in slot n , UE shall:

- be able to continue to receive on TCI state 0 till $n + T_{\text{HARQ}} + 3 \text{ ms}$
- be able to start receiving on TCI state 1 after $n + T_{\text{HARQ}} + 5 \text{ ms} + T_{\text{first-SSB}}$

A.17.5.4.2 RRC based active TCI state switch

A.17.5.4.2.1 NR PCell FR2 active TCI state switch for a known TCI state

A.17.5.4.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the active TCI state switch delay requirement defined in clause 8.10B.5. Supported test configuration is shown in Table A.17.5.4.2.1.1-1.

The test scenario comprises of one NR PCell as given in Table A.17.5.4.2.1.1-2. Cell-specific parameters of NR PCell is specified in Table A.17.5.4.2.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.17.5.4.2.1.1-4.

PDCCHs indicating new transmissions shall be sent continuously on PCell to ensure that the UE would have ACK/NACK sending.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 1 TCI state for PCell, PDCCH-TCI-state0 (QCL'd to SSB0)
- UE is indicated in TCI state0 as the active TCI state

The test consists of two time periods, T1 and T2. Figure A.17.5.4.2.1.1-1-1 and Figure A.17.5.4.2.1.1-1-2 show the Time multiplexed (allocation in Frequency is symbolic) downlink transmissions from each Angle of Arrival. During T1 only SSB to which TCI-state0 is QCL'd is transmitted. At the beginning of T2, the SSB corresponding to TCI-state1 starts transmitting. The UE is configured to provide periodic L1-RSRP reports. In slot n which is within 1280 ms of UE providing L1-RSRP report with results for both SSB0 and SSB1, UE receives a RRC command indicating a switch to TCI-state1.

The test equipment verifies the TCI state switch time in PCell by scheduling the UE on TCI state 1 after $n + T_{\text{RRC_processing}} + T_{\text{first-SSB}} + 2\text{ms}$.

Table A.17.5.4.2.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.5.4.2.1.1-2: General test parameters for TCI state switch

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
T1	s	0.2	
T2	s	2	

Table A.17.5.4.2.1.1-3: NR Cell specific test parameters for TCI state switch

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		100 MHz: N _{RB,C} = 66
Data RBs allocated		24
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.2 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.5
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State 0		TCI.State.0
TCI State 1		TCI.State.1
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	640

timeRestrictionForChannelMeasurements		configured
TRS Configuration		TRS.2.1 TDD TRS.2.2 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS(Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		No external noise (Note 2)
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].		

Table A.17.5.4.2.1.1-4: OTA related test parameters for TCI state switch

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams ^{Note 6}		Rough			
$\hat{E}_s$	dBm/SCS	-80.6	-80.6	-Infinity	-80.6
SSB R_P ^{Note 2}	dBm/ SCS	-80.6	-80.6	-Infinity	-80.6
$\hat{E}_s/I_{\text{otBB}}$ ^{Note 7}	dB	8.3	8.3	-Infinity	8.3
I_O ^{Note2}	dBm/95.04 MHz ^{Note4}	-6.0	-56.0	- Infinity	-56.0
Note 1:	Void				
Note 2:	SS B_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	Void				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	As observed with 0dBi gain antenna at the center of the quiet zone.				
Note 6:	Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				
Note 7:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.				

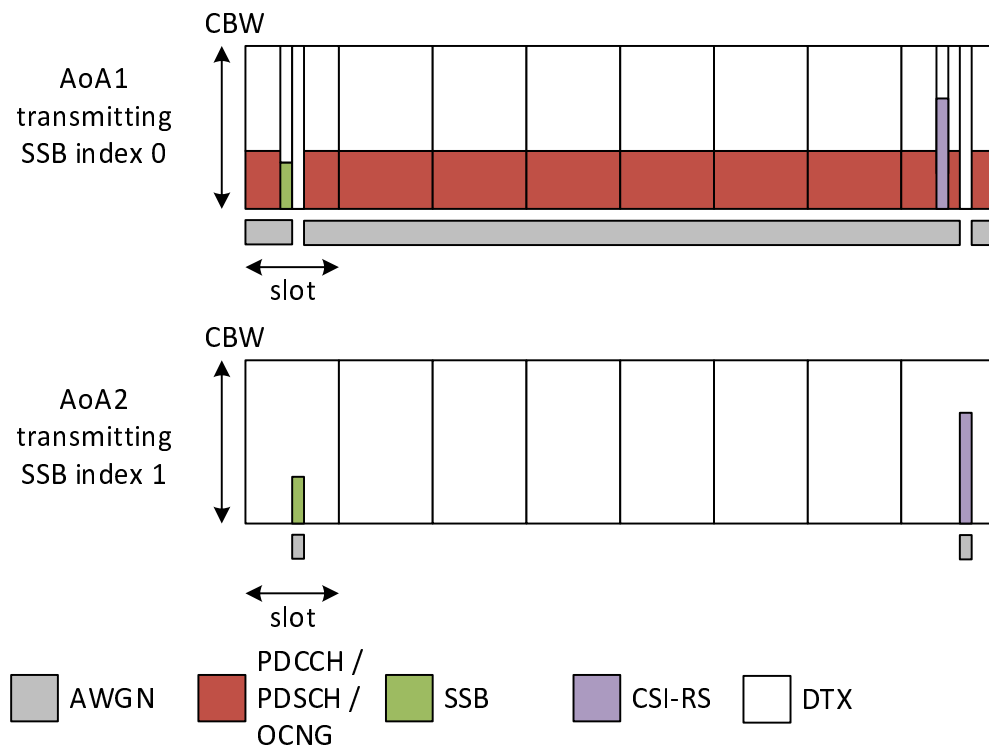


Figure A.17.5.4.2.1.1-1-1: Time multiplexed downlink transmissions during T1

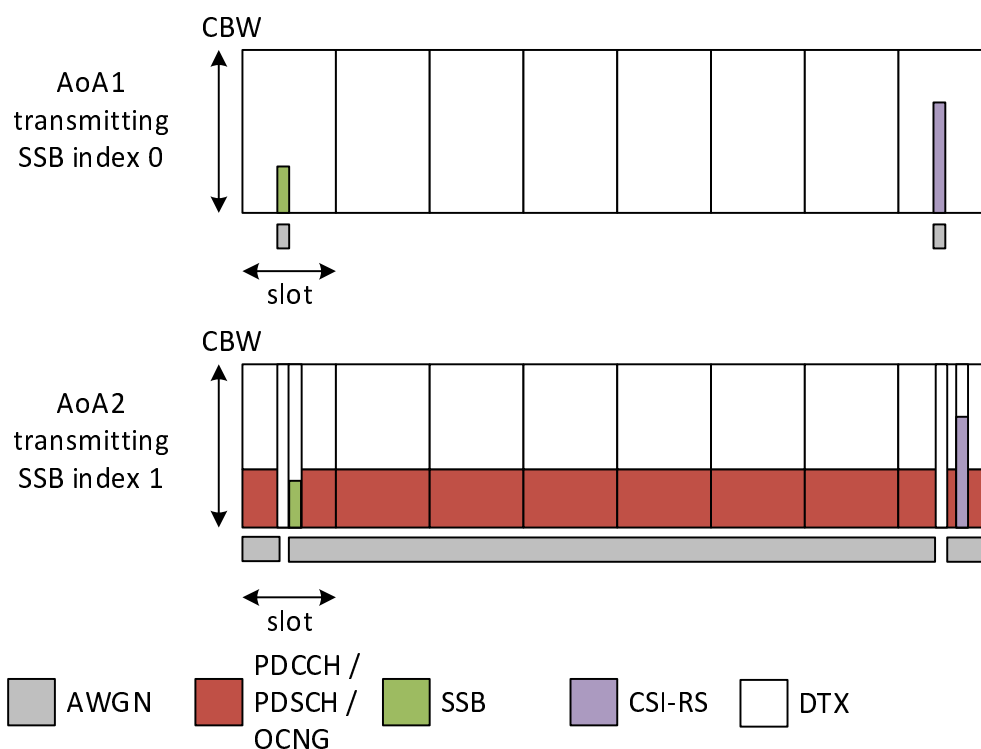


Figure A.17.5.4.2.1.1-2: Time multiplexed downlink transmissions during T2

A.17.5.4.2.1.2 Test Requirements

During T2, UE shall send L1-RSRP report with both SSB0 and SSB1.

After receiving RRC command in slot n , UE shall be able to start receiving on TCI state 1 after $n + T_{\text{RRC_processing}} + T_{\text{first-SSB}} + 2\text{ms}$.

A.17.5.5 Uplink spatial relation switch delay

A.17.5.5.1 MAC-CE based Spatial Relation switch

A.17.5.5.1.1 NR PCell FR2 spatial relation associated with known DL-RS

A.17.5.5.1.1.1 Test Purpose and Environment

The purpose of this test is to verify fulfillment of the uplink spatial relation switch delay requirement defined in clause 8.12A.3 by a UE capable of beam correspondence without the need for UL beam sweeping. The supported test configurations are shown in Table A.17.5.5.1.1.1-1.

The test scenario comprises one PCell (Cell 1) as outlined in Table A.17.5.5.1.1.1-2. Cell-specific parameters are provided in Table A.17.5.5.1.1.1-3. OTA-related test parameters are provided in Table A.17.5.5.1.1.1-4.

Throughout the test, PDCCH indicating new transmissions shall be sent continuously on PCell to ensure that the UE will send ACK/NACKs on PUCCH.

Before the test starts,

- UE is connected to Cell 1 on radio channel 1.
- UE is configured with a single TCI state, TCI State-0, which is QCLed with SSB0.
- UE is configured with two spatial relation information configurations Spatial Relation Info-0 and Spatial Relation Info-1 for PUCCH, each associated with SSB0 and SSB1, respectively.
- UE is indicated via MAC-CE activation of *PUCCH-SpatialRelationInfoId* corresponding to Spatial Relation Info-0
- UE is configured with a CSI measurement configuration indicating L1-RSRP measurements on SSB0 and SSB1 with periodic reporting. The L1-RSRP measurement period is influenced by the following: the higher layer parameter *timeRestrictionForChannelMeasurement* is configured, measured SSBs are fully overlapping with SMTC window, and there are no conflicts with measurement gaps.

The test consists of two time periods, T1 and T2. During T1 only the SSB associated with PDCCH TCI state-0 and PUCCH Spatial Relation Info-0 is transmitted. At the beginning of T2, transmission of the SSB associated with PUCCH Spatial Relation Info-1 starts. The UE conducts periodic L1-RSRP measurements and *SSB-Index-RSRP* reporting for SSB0 and SSB1. In slot n , which is within 1280ms after UE receiving both SSB0 and SSB1, and after reporting valid results for both the SSB0 and the SSB1, the UE receives a MAC-CE indicating a switch of spatial relation to PUCCH Spatial Relation Info 1.

The test equipment verifies that the UE transmits according to PUCCH Spatial Relation Info 0 up until slot $n + T_{\text{HARQ}}/\text{NR slot length} + 3N_{\text{slot}}^{\text{subframe},\mu}$, and according to PUCCH Spatial Relation Info 1 from slot $n + T_{\text{HARQ}}/\text{NR slot length} + 3N_{\text{slot}}^{\text{subframe},\mu} + 1$ and onwards.

Table A.17.5.5.1.1.1-1: Supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.5.5.1.1.1-2: General test parameters

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
L1-RSRP reporting period	slot	160	Periodic L1-RSRP reporting configured
L1-RSRP measured RS		SSB0, SSB1	L1-RSRP measurements of SSB0 and SSB1.
Number of reported RS		2	L1-RSRP reporting of measurements on SSB0 and SSB1.
T1	s	[0.2]	
T2	s	[2]	

A.17.5.5.1.1.1: NR Cell specific test parameters

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		100 MHz: N _{RB,C} = 66
Initial DL BWP Configuration		DLBWP.0.2

Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTC Configuration		SMTC.1
TCI State-0 Configuration		TCI.State.0
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
timeRestrictionForChannelMeasurements		configured
TRS Configuration		TRS.2.1 TDD
Spatial Relation Info-0 Configuration		PUCCH.SRI.0
Spatial Relation Info-1 Configuration		PUCCH.SRI.1
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS ^{Note 1}		
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.17.5.5.1.1.1-4: OTA related test parameters

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams ^{Note 6}		Rough			
N _{oc} ^{Note 1}	dBm/15 kHz	-92.1			
N _{oc} ^{Note 1}	dBm/SCS	-83.1			
Ê _s /N _{oc}	dB	1		-infinity	1
SS-RSRP ^{Note 2}	dBm/120 kHz ^{Note3}	-82.1		-infinity	-82.1
I _o ^{Note2}	dBm/95.04 MHz ^{Note4}	-50.6		-54.1	-50.6
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.					
Note 2: SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the center of the quiet zone.					
Note 6: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.					

A.17.5.5.1.1.2 Test Requirements

During T2, the UE shall send L1-RSRP report with results for SSB0 and SSB1.

After receiving MAC-CE command in slot n , the UE shall:

- Continue transmitting using PUCCH spatial relation associated with SSB0 up to and including slot $n + T_{\text{HARQ}}/\text{NR slot length} + 3N_{\text{slot}}^{\text{subframe},\mu}$
- Start transmitting using PUCCH spatial relation associated with SSB1 from slot $n + T_{\text{HARQ}}/\text{NR slot length} + 3N_{\text{slot}}^{\text{subframe},\mu} + 1$ and onwards.

The rate of correct events observed during repeated tests shall be at least [90]%.

A.17.5.5.2 RRC based spatial relation switch

A.17.5.5.2.1 NR PCell FR2 spatial relation switch associated with a known DL-RS

A.17.5.5.2.1.1 Test Purpose and Environment

The purpose of this test is to verify the RRC based spatial relation switch delay requirement defined in clause 8.12A.5 by a UE capable of beam correspondence without the need for UL beam sweeping. In the test the higher layer parameter *timeRestrictionForChannelMeasurements* is configured. Supported test configuration is shown in Table A.17.5.5.2.1.1-1.

The test scenario comprises of one PCell (Cell 1) as given in Table A.17.5.5.2.1.1-2. Cell-specific parameters of PCell is specified in Table A.17.5.5.2.1.1-3 below. The OTA related test parameters for FR2 is shown in Table A.17.5.5.2.1.1-4.

Periodic SRS is transmitted on PCell (Cell 1), and the SRS configuration is SRSConf.1 given in Table A.5.4.1.1.1-3.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).
- UE is configured with 1 SRS-SpatialRelation0 associated with SSB0.
- UE is indicated SRS-SpatialRelation0 as the active SRS spatial relation.

The test consists of two time periods, T1 and T2. During T1 only SSB0 to which SRS-SpatialRelation0 associated is transmitted. UE shall transmit periodic SRS with SRS-SpatialRelation0 on the UL of the PCell.

T2 start when the tester initiates transmission of SSB1 corresponding to SRS-SpatialRelation1. The UE is configured to transmit periodic L1-RSRP reports.

In slot n , which is within [1280]ms of UE providing the L1-RSRP report with results for both SSB0 and SSB1, the UE receives an RRC command indicating a switch to transmit periodic SRS with target SRS-SpatialRelation1. The UE shall be able to transmit periodic SRS with target spatial relation (SRS-SpatialRelation1) on PCell in slot $n + T_{\text{RRC_processing}}/\text{NR slot length} + 1$.

Table A.17.5.5.2.1.1-1: Supported test configurations

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.5.5.2.1.1-2: General test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
timeRestrictionForChannel Measurements		configured	Time domain measurement restriction for the channel (signal) measurements (see TS 38.214 [19], clause 5.2.1.1)
T1	s	0.5	
T2	s	1.5	

Table A.17.5.5.2.1.1-3: NR Cell specific test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD
TDD configuration		TDDConf.3.1
BW _{channel}		100 MHz: N _{RB,C} = 66
Initial DL BWP Configuration		DLBWP.0.2
Dedicated DL BWP Configuration		DLBWP.1.1
Initial UL BWP Configuration		ULBWP.0.2
Dedicated UL BWP Configuration		ULBWP.1.1
PDSCH Reference measurement channel		SR.3.1 TDD
RMSI CORESET parameters		CR.3.1 TDD
Dedicated CORESET parameters		CCR.3.1 TDD
OCNG Patterns		OP.1
SSB Configuration		SSB.1 FR2
SMTc Configuration		SMTc.1
SRS-SpatialRelation0		SRS.SRI0
SRS-SpatialRelation1		SRS.SRI1
reportConfigType		ssb-Index-RSRP
reportConfigType		periodic
Number of reported RS		2
L1-RSRP reporting period	slot	160
TRS Configuration		TRS.2.1 TDD
Correlation Matrix and Antenna Configuration		1x2 Low
EPRE ratio of PSS to SSS	dB	0
EPRE ratio of PBCH DMRS to SSS		
EPRE ratio of PBCH to PBCH DMRS		
EPRE ratio of PDCCH DMRS to SSS		
EPRE ratio of PDCCH to PDCCH DMRS		
EPRE ratio of PDSCH DMRS to SSS		
EPRE ratio of PDSCH to PDSCH		
EPRE ratio of OCNG DMRS to SSS (Note 1)		
EPRE ratio of OCNG to OCNG DMRS (Note 1)		
Propagation Condition		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		

Table A.17.5.5.2.1.1-4: OTA related test parameters for spatial relation switch associated with a known DL-RS

Parameter	Unit	Cell 1			
		SSB0		SSB1	
		T1	T2	T1	T2
Angle of arrival configuration		Setup 3 according to clause A.3.15.3			
		AoA1		AoA2	
Assumption for UE beams ^{Note 6}		Rough		Rough	
N _{oc} ^{Note 1}	dBm/15 kHz	-92.1			
N _{oc} ^{Note 1}	dBm/SCS	-83.1			
Ê _s /N _{oc}	dB	1	1	-Infinity	1
SS-RSRP ^{Note 2}	dBm/120 kHz ^{Note3}	-82.1	-82.1	-Infinity	-82.1
I _o ^{Note2,Note6}	dBm/95.04 MHz ^{Note4}	-50.6	-50.6	-54.1	-50.6
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 2:	SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	As observed with 0dBi gain antenna at the center of the quiet zone.				
Note 6:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.17.5.5.2.1.2 Test Requirements

During T1 UE shall send L1-RSRP report with SSB0 to which SRS-SpatialRelation0 is associated. During T2, UE shall send L1-RSRP report with SSB1 to which SRS-SpatialRelation1 is associated.

After receiving RRC command in slot n , UE shall be able to transmit target periodic SRS with SRS-SpatialRelation1 on the PCell in the slot $n + T_{RRC_processing}/NR\ slot\ length + 1$.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.5.6 UE specific CBW change

A.17.5.6.1 NR FR2 UE specific CBW change of PCell with non-DRX in SA

A.17.5.6.1.1 Test Purpose and Environment

The purpose of this test is to verify the UE specific CBW change delay requirement defined in clause 8.13A. Supported test configurations are shown in Table A.17.5.6.1.1-1.

The test scenario comprises of one PCell (Cell 1) as given in Table A.17.5.6.1.1-2. Cell-specific parameters of PCell are specified in Table A.17.5.6.1.1-3 below.

PDCCHs indicating new transmissions shall be sent continuously on PCell (Cell 1) to ensure that the UE will have ACK/NACK transmission.

Before the test starts,

- UE is connected to Cell 1 (PCell) on radio channel 1 (PCC).

- UE has bandwidth part BWP-1 in its RRC-configuration for Cell 1 (PCell).
- UE is indicated in firstActiveDownlinkBWP-Id that the active DL BWP is BWP-1 of initial condition in PCell.
- UE has been configured with UE-specific CBW (CBW-1)
- UE is indicated in SCS-SpecificCarrier [2] that the UE-specific CBW is CBW-1 as the initial condition in Cell 1 (PCell).

All cells have constant signal levels throughout the test.

The test consists of 1 time period, with duration of T1.

During T1,

Time period T1 starts when a *RRCReconfiguration* with updated CBW configuration, sent from the test equipment to the UE, is received at the UE side in PCell's slot # denoted *i*. The UE shall reconfigure its CBW with the updated CBW of final condition.

The UE shall be able to completely receive PDSCH on PCell from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}}$ as defined in clause 8.13.2 and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}} + k1$. The UE shall be continuously scheduled on PCell's new CBW starting from the first DL slot that occurs after the beginning of DL slot $i + \frac{T_{\text{RRCprocessingDelay}} + T_{\text{CBWchangeDelayRRC}}}{\text{NR Slot length}}$.

$T_{\text{RRCprocessingDelay}}$ and $T_{\text{CBWchangeDelayRRC}}$ are defined in clause 8.13A.

The test equipment verifies the UE specific CBW switch time in PCell by counting the time from the time when the RRC Reconfiguration message including updated CBW configurations sent till the time when RRC Reconfiguration Complete message is received.

Table A.17.5.6.1.1-1: UE specific CBW change supported test configurations

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations	

Table A.17.5.6.1.1-2: General test parameters for UE specific CBW change in NR SA

Parameter	Unit	Value	Comment
NR RF Channel Number		1	One NR radio channel is used for this test
Active PCell		Cell 1	PCell on RF channel number 1.
CP length		Normal	
DRX		OFF	
Cell-individual offset for cells on RF channel number 1	dB	0	Individual offset for cells on PCC.
T1	s	[0.2]	

Table A.17.5.6.1.1-3: NR Cell specific test parameters for UE specific CBW change in NR SA

Parameter	Unit	Cell 1
Frequency Range		FR2
Duplex mode		TDD

TDD configuration			TDDConf.3.1
BW _{channel}			100 MHz: N _{RB,c} = 66
Active DL BWP ID			1
Initial DL BWP Configuration (BWP-1)			DLBWP.0.2
Initial UL BWP Configuration			ULBWP.0.2
Initial Condition	Active DL CBW-1 Configuration		DLCBW.1.1
	Active UL CBW-1 Configuration		ULCBW.1.1
Final Condition	Active DL CBW-1 Configuration		DLCBW.1.2
	Active UL CBW-1 Configuration		ULCBW.1.2
'PDSCH Reference measurement channel			SR.3.1 TDD
RMSI CORESET parameters			CR.3.1 TDD
Dedicated CORESET parameters			CCR.3.1 TDD
OCNG Patterns			OP.1
SSB Configuration			SSB.1 FR2
SMTC Configuration			SMTC.1
TCI State			TCI.State.0
TRS Configuration			TRS.2.1 TDD
Antenna Configuration			1x2
Propagation Condition			AWGN
EPRE ratio of PSS to SSS		dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH			
EPRE ratio of OCNG DMRS to SSS(Note 1)			
EPRE ratio of OCNG to OCNG DMRS (Note 1)			
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.		
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.		
Note 3:	SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.		

Table A.17.5.6.1.1-4: OTA related test parameters for UE specific CBW change test case

Parameter		Unit	Cell 2
Angle of arrival configuration			Setup 1 according to table A.3.15
Assumption for UE beams ^{Note 5}			Fine
N _{oc} ^{Note1}	NR_TDD_FR2_A	dBm/15kHz	-112
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
	NR_TDD_FR2_T		
N _{oc} ^{Note1}	NR_TDD_FR2_Y	dBm/SCS	-103
	NR_TDD_FR2_A		
	NR_TDD_FR2_B		
	NR_TDD_FR2_F		
	NR_TDD_FR2_G		
SS-RSRP ^{Note2}	NR_TDD_FR2_T	dBm/SCS ^{Note3}	-85
	NR_TDD_FR2_Y		

		NR_TDD_FR2_F		
		NR_TDD_FR2_G		
		NR_TDD_FR2_T		
		NR_TDD_FR2_Y		
$\hat{E}_s/I_{ot}$			dB	18
Io ^{Note2}	NR_TDD_FR2_A		dBm/95.04 MHz ^{Note4}	-56
	NR_TDD_FR2_B			
	NR_TDD_FR2_F			
	NR_TDD_FR2_G			
	NR_TDD_FR2_T			
	NR_TDD_FR2_Y			
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2: SS-RSRP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5: Information about types of UE beam is given in B.2.1.3 and does not limit UE implementation or test system implementation.				

A.17.5.6.1.2 Test Requirements

During T1, the UE shall be ready for the reception of uplink grant for PCell from the first DL slot that occurs after the beginning of slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR \text{ Slot length}}$ and starts to report valid ACK/NACK for the PCell from the first UL slot that occurs after the beginning of DL slot $i + \frac{T_{RRCprocessingDelay} + T_{CBWchangeDelayRRC}}{NR \text{ Slot length}} + k1$.

Where, $k1$ is the timing between DL data receiving and acknowledgement as specified in [7].

All of the above test requirements shall be fulfilled in order for the observed PCell UE specific CBW change delay to be counted as correct.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.6 Measurement procedure for RedCap

A.17.6.1 Intra-frequency Measurements

A.17.6.1.1 SA event triggered reporting test without gap under non-DRX

A.17.6.1.1.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements for RedCap in clause 9.2B.5.1 and 9.2B.5.2. Supported test configurations are shown in table A.17.6.1.1.1-1.

Table A.17.6.1.1.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.17.6.1.1.1-2, A.17.6.1.1.1-3 and A.17.6.1.1.1-4 below.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.17.6.1.1.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX for RedCap

Parameter	Unit	Config	Value	Comment
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
SMTC configuration		1, 2	SMTC.1	
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
TimeToTrigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μ s	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.17.6.1.1.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX for RedCap

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1	24		24	
		2	48		48	
Intial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Active DL BWP configuration		1, 2	DLBWP.1.1		DLBWP.1.1	
Active UL BWP configuration		1, 2	ULBWP.1.1		ULBWP.1.1	
RLM-RS		1, 2	SSB		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2	CCR.3.7 TDD		N/A	
TRS configuration		1, 2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2	TCI.State.2		N/A	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120		120	
OCNG Patterns		1, 2	OP.5		N/A	

cellIndividualOffset	dB	1~2	N/A	16
SSB		1	SSB.1 FR2	SSB.7 FR2
		2	SSB.2 FR2	SSB.8 FR2
Propagation Condition		1, 2	No external noise (Note 1)	No external noise (Note 1)
Note 1: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

Table A.17.6.1.1.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 without gap without DRX for RedCap

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam assumption ^{Note 4}		1,2	Rough		Rough	
E _s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
$\hat{E}_s/I_{ot}$ BB Note 5	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
I _o	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1, 2	Defined in Figure A.17.6.1.1.1-1			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Void					
Note 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					
Note 5:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.					

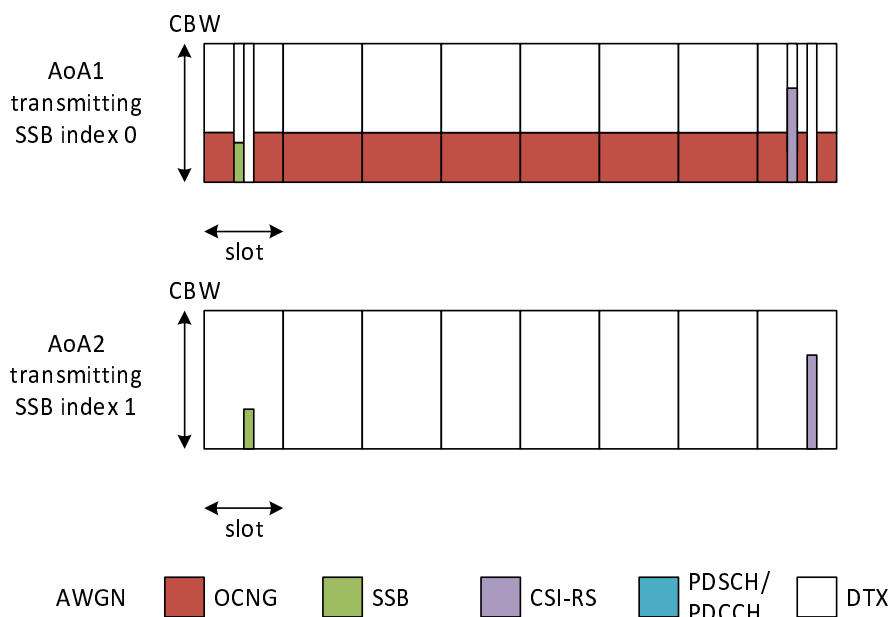


Figure A.17.6.1.1.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.17.6.1.1.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 2.4s for a UE supporting power class 1 or 5,
- 1.44s for a UE supporting power class 2, 3, 4 or 7.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times \text{TTIDCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.6.1.2 SA event triggered reporting test without gap under DRX

A.17.6.1.2.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2B.5.1 and 9.2B.5.2. Supported test configurations are shown in table A.7.6.1.2.1-1.

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.7.6.1.2.1-2, A.7.6.1.2.1-3 and A.7.6.1.2.1-4.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

A.7.6.1.2.2 Test Requirements

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 7.2s for a UE supporting power class 1 or 5,
- 4.32s for a UE supporting power class 2, 3, 4, or 7.

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.2s for a UE supporting power class 1 or 5,
- 30.72s for a UE supporting power class 2, 3 4, or 7.

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.6.1.3 SA event triggered reporting test with per-UE gaps under non-DRX

A.17.6.1.3.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2B.6.1 and 9.2B.6.2. Supported test configurations are shown in table A.17.6.1.3.1-1.

Table A.17.6.1.3.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations.	

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.17.6.1.3.1-2 ~ 4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

Table A.17.6.1.3.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Value	Comment
Active cell		1, 2	PCell (Cell 1)	
Neighbour cell		1, 2	Cell 2	Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2	One TDD carrier frequency is used for the NR cells.
Gap type		1, 2	Per-UE gaps	
Measurement gap repetition periodicity	ms	1, 2	40	
Measurement gap length	ms	1, 2	6	
Measurement gap offset	ms	1, 2	4	
SMTC configuration for CD-SSB		1, 2	SMTC.1 RedCap	
SMTC configuration for NCD-SSB		1, 2	SMTC.2 RedCap	
CSI-RS parameters		1, 2	CSI-RS.3.2 TDD	
A3-Offset	dB	1, 2	-11	
CP length		1, 2	Normal	
Hysteresis	dB	1, 2	0	
Time To Trigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	
Time offset between Cell 1 and Cell 2		1, 2	3 μ s	Synchronous cells
T1	s	1, 2	5	
T2	s	1, 2	5	

Table A.17.6.1.3.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1	24		24	
		2	48		48	
Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated DL BWP configuration		1, 2	DLBWP.1.3 RedCap ^{Note 1}		DLBWP.1.3 RedCap ^{Note 1}	
Dedicated UL BWP configuration		1, 2	ULBWP.1.3 RedCap ^{Note 2}		ULBWP.1.3 RedCap ^{Note 2}	
RLM-RS		1, 2	CSI-RS		SSB	
PDSCH RMC configuration		1	SR.3.2 TDD		N/A	
		2	SR.3.3 TDD			
RMSI CORESET RMC configuration		1	CR.3.1 TDD		N/A	
		2	CR.3.2 TDD		N/A	
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD		N/A	
		2	CCR.3.7 TDD		N/A	
TRS configuration		1, 2	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI states		1, 2	TCI.State.2		N/A	

PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	120
OCNG Patterns		1, 2	OP.5	N/A
cellIndividualOffset	dB	1~2	N/A	16
CD-SSB		1	SSB.2 RedCap FR2	SSB.2 RedCap FR2
		2	SSB.4 RedCap FR2	SSB.4 RedCap FR2
NCD-SSB		1, 2	SSB.3 RedCap FR2	SSB.3 RedCap FR2
			SSB.5 RedCap FR2	SSB.5 RedCap FR2
Propagation Condition		1, 2	No external noise (Note 3)	No external noise (Note 3)
Note 1: The starting PRB index for dedicated DL BWP1 corresponding to CD-SSB PRB index; the starting PRB index for dedicated DL BWP2 corresponding to NCD-SSB PRB index; Note 2: The starting PRB index for dedicated UL BWP1 is the same as the starting PRB index for dedicated DL BWP1; the starting PRB index for dedicated UL BWP2 is the same as the starting PRB index for dedicated DL BWP2. Note 3: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].				

Table A.17.6.1.3.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps without DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 3 defined in A.3.15.3			
			AoA1		AoA2	
Beam Assumption ^{Note 4}		1,2	Rough		Rough	
E _s	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
$\hat{E}_s/I_{ot}$ ^{BB Note 5}	dB	1, 2	-0.12	-0.12	-Infinity	-0.12
SSB_RP	dBm/SCS	1	-89	-89	-Infinity	-89
		2	-86	-86	-Infinity	-86
I _o	dBm/95.04MHz	1	-64.41	-64.41	-Infinity	-64.41
		2	-61.41	-61.41	-Infinity	-61.41
Time multiplexing of the downlink transmissions from each AoA		1	Defined in Figure A.17.6.1.3.1-1			
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Void					
Note 3:	Es/Iot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					
Note 5:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.					

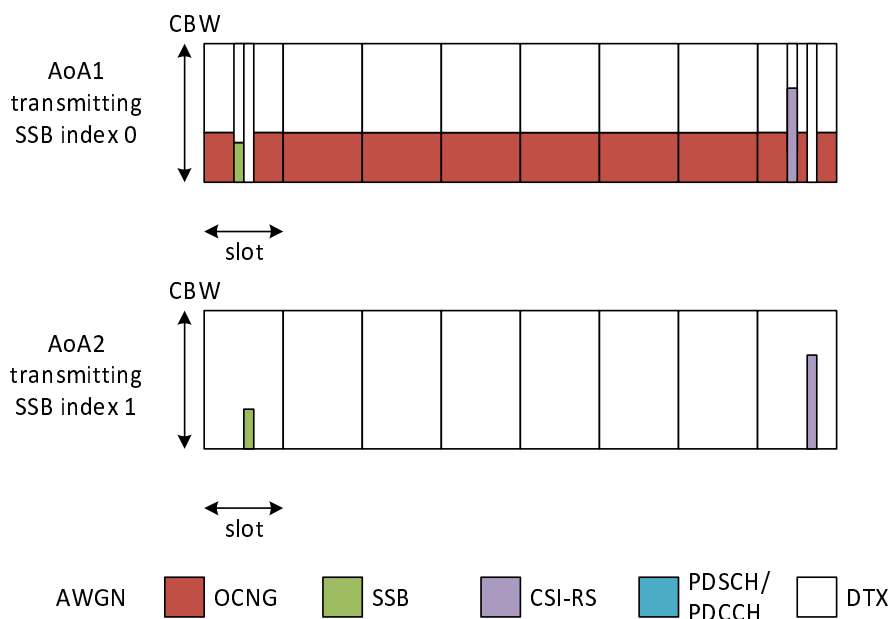


Figure A.17.6.1.3.1-1: Time multiplexed downlink transmissions (Config 1 example)

A.17.6.1.3.2 Test Requirements

In the test, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 3.2s for a UE supporting power class 1 or 5,
- 1.92s for a UE supporting power class 2, 3 4 or 7

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.6.1.4 SA event triggered reporting test with per-UE gaps under DRX

A.17.6.1.4.1 Test purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the TDD intra-frequency cell search requirements in clause 9.2B.6.1 and 9.2B.6.2. Supported test configurations are shown in table A.17.6.1.4.1-1.

Table A.17.6.1.4.1-1: supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Note: The UE is only required to be tested in one of the supported test configurations.

There are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on the same frequency as the PCell. The test parameters for the Cell 1 and Cell 2 are given in Table A.17.6.1.4.1-2, A.17.6.1.4.1-3 and A.17.6.1.4.1-4 below.

There are two BWPs configured in Cell 1, BWP1 which contains the cell defining SSB, and BWP2 which does not contain any SSB of Cell 1. During the whole test, BWP2 is always scheduled as the active BWP for the UE.

In the measurement control information, a measurement object is configured for the frequency of the PCell, and it is indicated to the UE that event-triggered reporting with Event A3 is used.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of Cell 2.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.17.6.1.4.1-2: General test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Value		Comment
			Test 1	Test 2	
Active cell		1, 2	PCell (Cell 1)		
Neighbour cell		1, 2	Cell 2		Cell to be identified.
RF Channel Number		1, 2	1: Cell 1 and Cell 2		One TDD carrier frequency is used for the NR cells.
Gap type		1, 2	Per-UE gaps		
Measurement gap repetition periodicity	ms	1, 2	40		
Measurement gap length	ms	1, 2	6		
Measurement gap offset	ms	1, 2	39		
SMTC configuration		1, 2	SMTC.1		
CSI-RS parameters		1, 2	CSI-RS.3.2 TDD		
A3-Offset	dB	1, 2	-6		
CP length		1, 2	Normal		
Hysteresis	dB	1, 2	0		
Time To Trigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	DRX.1	DRX.7	DRX related parameters are defined in Table A.7.6.1.2.1-5
Time offset between Cell 1 and Cell 2		1, 2	3 μ s		Synchronous cells
T1	s	1, 2	5		
T2	s	1, 2	10	52	

Table A.17.6.1.4.1-3: NR Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
TDD configuration		1, 2	TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		1, 2	66		66	

Initial BWP configuration		1, 2	DLBWP.0.1 ULBWP.0.1	DLBWP.0.1 ULBWP.0.1
Active DL BWP configuration		1, 2	DLBWP.1.2	DLBWP.1.1
Active UL BWP configuration		1, 2	ULBWP.1.2	ULBWP.1.1
RLM-RS		1, 2	SCSI-RS	SSB
PDSCH RMC configuration		1	SR.3.2 TDD	N/A
		2	SR.3.3 TDD	
RMSI CORESET RMC configuration		1	CR.3.1 TDD	N/A
		2	CR.3.2 TDD	N/A
Dedicated CORESET RMC configuration		1	CCR.3.1 TDD	N/A
		2	CCR.3.7 TDD	N/A
TRS configuration		1, 2	TRS.2.1 TDD	N/A
PDSCH/PDCCH TCI state		1, 2	TCI.State.2	N/A
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	120
OCNG Patterns		1, 2	OP.1	OP.1
SSB		1	SSB.3 FR2	SSB.3 FR2
		2	SSB.4 FR2	SSB.4 FR2
Propagation Condition		1, 2	AWGN	AWGN

Table A.17.6.1.4.1-4: NR OTA Cell specific test parameters for intra-frequency event triggered reporting for SA with TDD PCell in FR2 with per-UE gaps with DRX

Parameter	Unit	Config	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		1, 2	Setup 1 defined in A.3.15.1			
Beam Assumption ^{Note 4}		1,2	Rough			
$\hat{E}_s / I_{ot}$ ^{BB Note 5}	dB	1, 2	3.77	-1.52	-Infinity	-1.52
N_{oc} ^{Note 2}	dBm/15 KHz	1, 2	-98			
N_{oc} ^{Note 2}	dBm/SCS	1	-89			
		2	-86			
SSB_RP	dBm/SCS	1	-85	-85	-Infinity	-85
		2	-82	-82	-Infinity	-82
$\hat{E}_s / N_{oc}$	dB	1, 2	4	4	-Infinity	4
I_o	dBm/95.04MHz	1,2	-54.53	-52.18	See Cell 1 columns	
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	Es/lot, SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					
Note 5:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.					

Table A.17.6.1.4.1-5: Void**Table A.17.6.1.4.1-6: Void****A.17.6.1.4.2 Test Requirements**

In test 1, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 7.2s for a UE supporting power class 1 or 5,
- 4.32s for a UE supporting power class 2, 3 4 or 7

In test 2, the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

- 51.2s for a UE supporting power class 1 or 5,
- 30.72s for a UE supporting power class 2, 3 4 or 7

The UE is not required to read the neighbour cell SSB index in this test.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.6.2 Inter-frequency Measurements**A.17.6.2.1 SA event triggered reporting tests For FR2 without SSB time index detection when DRX is not used (PCell in FR2)****A.17.6.2.1.1 Test Purpose and Environment**

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.17.6.2.1.1-1, A.17.6.2.1.1-2, and A.17.6.2.1.1-3.

Measurement gap pattern configuration # 13 as defined in Table A.17.6.2.1.1-2 is provided for UE that does not support per-FR gap and for UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.17.6.2.1.1-1.

Table A.17.6.2.1.1-1 SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Note 1: Void.

Table A.17.6.2.1.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMTC-CD-SSB parameters		Config 1	SSB.2 RedCap FR2	As specified in clause A.3.10.2
NCD-SSB parameters		Config 1	SSB.3 RedCap FR2	
offsetMO	dB	Config 1	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	5.2 for PC1; 3.5 for other PC	

Table A.17.6.2.1.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption ^{Note 7}			1,2	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	

	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
	Dedicated DL BWP configuration			DLBWP.1.3 RedCap Note 9		N/A	
	Dedicated UL BWP configuration			ULBWP.1.3 RedCap Note 10		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2 for CD-SSB			Config 1	SMTC.1		SMTC.1	
SMTC configuration for NCD-SSB			Config 1	SMTC.2 RedCap		SMTC.2 RedCap	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
$\hat{E}_s$		dBm/S CS	Config 1	-87	-87	-Infinity	-87
SSBRP Note 3		dBm/S CS Note5	Config 1	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot_BB}$ Note 8		dB	Config 1	1.89	1.89	-Infinity	1.89
I_{0} Note3		dBm/95 .04 MHz Note5	Config 1	-58.01	-58.01	-Infinity	-58.01
Propagation Condition			Config 1	No external noise (Note 11)		No external noise (Note 11)	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Void
Note 3:	SSBRP, Es/Iot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_s from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 9:	The starting PRB index for dedicated DL BWP1 corresponding to CD-SSB PRB index; the starting PRB index for dedicated DL BWP2 corresponding to NCD-SSB PRB index;
Note 10:	The starting PRB index for dedicated UL BWP1 is the same as the starting PRB index for dedicated DL BWP1; the starting PRB index for dedicated UL BWP2 is the same as the starting PRB index for dedicated DL BWP2.
Note 11:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].

A.17.6.2.1.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

5120 for UE supporting power class 1, or

3200 for UE supporting other power class.

The UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.6.2.2 SA event triggered reporting tests For FR2 without SSB time index detection when DRX is used (PCell in FR2)

A.17.6.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that RedCap UE makes correct reporting of an event in FR2. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.17.6.2.2.1-1, A.17.6.2.2.1-2, and A.17.6.2.2.1-3.

In test 1&2 measurement gap pattern configuration # 13 as defined in Table A.17.6.2.2.1-2 is provided for RedCap UE that does not support per-FR gap and for RedCap UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.17.6.2.2.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.17.6.2.2.1-1: SA event triggered reporting tests without SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.17.6.2.2.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6		
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	DRX.1	DRX.7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3μs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	8 for PC1; 5 for other PC	82 for PC1; 52 for other PC	

Table A.17.6.2.2.1-3: Cell specific test parameters for CA inter-frequency event triggered reporting without SSB time index detection

Parameter	Unit	Test configuration	Cell 1		Cell 2	
			T1	T2	T1	T2
AoA setup		Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}		Config 1	Rough		Rough	
NR RF Channel Number		Config 1	1		2	
TDD configuration		Config 1	TDDConf.3.1		TDDConf.3.1	
Duplex mode		Config 1	TDD		TDD	
BW _{channel}	MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		Config 1	66		66	
BWP BW	MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	

BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0	0		
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}		dBm/15 kHz Note5		-104.7		-104.7	
N_{oc}^{Note2}		dBm/S CS Note4	Config 1	-95.7		-95.7	
SS-RSRP ^{Note 3}		dBm/S CS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s/I_{ot}$		dB	Config 1	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$		dB	Config 1	6	6	-Infinity	9
I_o^{Note3}		dBm/95 .04 MHz Note5	Config 1	-59.7	-59.7	-66.7	-57.2
Propagation Condition			Config 1	AWGN		AWGN	
Antenna Configuration			Config 1	1x2		1x2	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.6.2.2.2 Test Requirements

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X1 ms from the beginning of time period T2, where X1 is

7680 for UE supporting power class 1, or

4800 for UE supporting other power class.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X2 ms from the beginning of time period T2, where X2 is

81920 for UE supporting power class 1, or

51200 for UE supporting other power class.

In test 1 and 2 UE is not required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.6.2.3 SA event triggered reporting tests For FR2 with SSB time index detection when DRX is not used (PCell in FR2)

A.17.6.2.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.17.6.2.3.1-1, A.17.6.2.3.1-2, and A.17.6.2.3.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.17.6.2.3.1-1.

Table A.17.6.2.3.1-1: SA event triggered reporting tests with SSB index reading for FR2-FR2

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.17.6.2.3.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	
SMT-CSSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
offsetMO	dB	Config 1	16	Applied to NR Cell 2 measurement object
A3-Offset	dB	Config 1	-11	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3µs	Synchronous cells.
T1	s	Config 1	5	
T2	s	Config 1	7 for PC1; 4.5 for other PC	

Table A.17.6.2.3.1-3: Cell specific test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption ^{Note 7}			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	

	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0		0	
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
$\hat{E}_s$		dBm/S CS	Config 1	-87	-87	-Infinity	-87
SSBRP ^{Note 3}		dBm/S CS ^{Note5}	Config 1	-87	-87	-Infinity	-87
$\hat{E}_s / I_{ot_BB}$ ^{Note 8}		dB	Config 1	1.89	1.89	-Infinity	1.89
I_o ^{Note3}		dBm/95.04 MHz ^{Note5}	Config 1	-58.01	-58.01	-Infinity	-58.01
Propagation Condition			Config 1	No external noise (Note 9)		No external noise (Note 9)	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Void
Note 3:	SBRP, Es/lot and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation
Note 8:	Calculation of Es/lot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_s from TS 38.101-2 [19] Table 6.2.1.3-4.
Note 9:	The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].

A.17.6.2.3.2 Test Requirements

The UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than X ms from the beginning of time period T2, where X is

6720 for UE supporting power class 1, or

4160 for UE supporting other power class.

The UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.6.2.4 SA event triggered reporting tests For FR2 with SSB time index detection when DRX is used (PCell in FR2) for 2 RX UE

A.17.6.2.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.3B.4.

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.17.6.2.4.1-1, A.17.6.2.4.1-2, and A.17.6.2.4.1-3.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event A3 is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Supported test configurations are shown in table A.17.6.2.4.1-1.

UE needs to be provided with new Timing Advance Command MAC control element at least once during each time alignment timer period to maintain uplink time alignment. Furthermore UE is allocated with PUSCH resource at every DRX cycle.

Table A.17.6.2.4.1-1: SA event triggered reporting tests with SSB index reading for FR2-FR2

Config	Description
--------	-------------

1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: Void.	

Table A.17.6.2.4.1-2: General test parameters for SA inter-frequency event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
NR RF Channel Number		Config 1	1, 2		Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (Pcell)		NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2		NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13		As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39		
SMTC-SSB parameters		Config 1	SSB.3 FR2		As specified in clause A.3.10.2
A3-Offset	dB	Config 1	-6		
Hysteresis	dB	Config 1	0		
CP length		Config 1	Normal		
TimeToTrigger	s	Config 1	0		
Filter coefficient		Config 1	0		L3 filtering is not used
DRX		Config 1	DRX.1	DRX.7	As specified in clause A.3.3
Time offset between serving and neighbour cells		Config 1	3μs		Synchronous cells.
T1	s	Config 1	5		
T2	s	Config 1	11 for PC1; 6.5 for other PC	108 for PC1; 67 for other PC	

Table A.17.6.2.4.1-3: Cell specific test parameters for CA inter-frequency event triggered reporting with SSB time index detection

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 1 as specified in clause A.3.15			
Beam Assumption ^{Note 7}			Config 1	Rough		Rough	
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated			Config 1	66		66	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	

	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1			Config 1	OP.1		OP.1	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	
SMTC configuration defined in A.3.11.1 and A.3.11.2			Config 1	SMTC.1		SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	Config 1	120		120	
TRS configuration			Config 1	TRS.2.1 TDD		N/A	
PDSCH/PDCCH TCI state			Config 1	TCI.State.2		N/A	
EPRE ratio of PSS to SSS			Config 1	0	0		
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH							
EPRE ratio of OCNG DMRS to SSS(Note 1)							
EPRE ratio of OCNG to OCNG DMRS (Note 1)							
N_{oc}^{Note2}		dBm/15 kHz Note5		-104.7		-104.7	
N_{oc}^{Note2}		dBm/S CS Note4	Config 1	-95.7		-95.7	
SS-RSRP ^{Note 3}		dBm/S CS Note5	Config 1	-89.7	-89.7	-Infinity	-86.7
$\hat{E}_s/I_{ot}$		dB	Config 1	6	6	-Infinity	9
$\hat{E}_s/N_{oc}$		dB	Config 1	6	6	-Infinity	9
I_o^{Note3}		dBm/95 .04 MHz Note5	Config 1	-59.7	-59.7	-66.7	-57.2
Propagation Condition			Config 1	AWGN		AWGN	

Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SSB_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	Void
Note 5:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone
Note 6:	As observed with 0 dBi gain antenna at the centre of the quiet zone
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.6.2.4.2 Test Requirements

In test 1 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $X1$ ms from the beginning of time period $T2$, where $X1$ is

10080 for UE supporting power class 1, or

6240 for UE supporting other power class.

In test 1 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 the UE shall send one Event A3 triggered measurement report, with a measurement reporting delay less than $X2$ ms from the beginning of time period $T2$, where $X2$ is

107520 for UE supporting power class 1, or

66560 for UE supporting other power class.

In test 1 and 2 UE is required to report SSB time index. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.6.3 L1-RSRP measurement for beam reporting

A.17.6.3.1 SSB based L1-RSRP measurement when DRX is not used

A.17.6.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.1, with the testing configurations for NR cells in Table A.7.6.3.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

A.17.6.3.1.2 Test parameters

Test parameters are the same as in clause A.7.6.3.1.2.

A.17.6.3.1.3 Test Requirements

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause [10.xx.xx.1], where X is

- 1680 for UE supporting power class 1 or 5.
- 1200 for UE supporting power class 2,3, 4 or 7.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.6.3.2 SSB based L1-RSRP measurement when DRX is used

A.17.6.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.1, with the testing configurations for NR cells in Table A.17.6.3.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15

Table A.17.6.3.2.1-1: Applicable NR configurations for FR2 SSB based L1-RSRP test

Config	Description
1	NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	NR 240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

A.17.6.3.2.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.17.6.3.2.2-1 and Table A.17.6.3.2.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the SSBs and report periodically. The test consists of two successive time periods, with time duration of T1 and T2 respectively. The test has higher layer parameter *timeRestrictionForChannelMeasurements* configured.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM, BFD and L1-RSRP measurement based on the SSBs.

Table A.17.6.3.2.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1~2		freq1
Duplex mode	1~2		TDD
TDD Configuration	1~2		TDDConf.3.1
BW _{channel}	1~2	MHz	100: N _{RB,c} = 66
Data RBs allocated	1~2		66
PDSCH Reference measurement channel	1		SR.3.2 TDD
	2		SR.3.3 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
	2		CR.3.2 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
	2		CCR.3.7 TDD

SSB configuration	1		SSB.1 FR2
	2		SSB.2 FR2
OCNG Patterns	1~2		OP.1
Initial BWP Configuration	1~2		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1~2		DLBWP.1.3 ULBWP.1.3
SMTc configuration	1~2		SMTc.1
TRS Configuration	1~2		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1~2		TCI.State.2
DRX configuration	1~2		DRX.3
reportConfigType	1~2		periodic
reportQuantity	1~2		ssb-Index-RSRP
Number of reported RS	1~2		2
L1-RSRP reporting period	1~2	slot	320
T1	1~2	s	5
T2	1~2	s	3
EPRE ratio of PSS to SSS	1~2	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Propagation condition	1~2		AWGN
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.17.6.3.2.2-2: SSB specific test parameters

Parameter	Config	Unit	SSB#0		SSB#1	
			T1	T2	T1	T2
Angle of arrival configuration			Setup 1 according to A.3.15.1			
Beam Assumption ^{Note 4}	1~2		Rough			
N_{oc} ^{Note2}	1~2	dBm/15kHz	-105			
N_{oc} ^{Note2}	1	dBm/SSB SCS	-96			
	2		-93			
$\hat{E}_s/I_{ot}$	1~2	dB	0	0	-Infinity	9
SSB_RP ^{Note3}	1	dBm/SSB SCS	-96	-96	-Infinity	-87
	2		-93	-93	-Infinity	-84
I_o ^{Note3}	1	dBm/95.04MHz	-63.97	-63.97	-66.98	-57.47
	2		-63.97	-63.97	-66.98	-57.47

$\hat{E}_s / N_{oc}$	1~2	dB	0	0	-Infinity	9
Note 1:	The resources for uplink transmission are assigned to the UE prior to the start of time period T2.					
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3:	SSB_RP and Io levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 4:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.17.6.3.2.3 Test Requirements

The UE shall send L1-RSRP report every 320 slots. No later than X ms plus 320 slots from the beginning of time period T2, UE shall send L1-RSRP report including the results for both SSB#0 and SSB#1 while meeting the accuracy requirements defined in clause 10.1.20.1, where X is

- 2880 for UE supporting power class 1
- 1920 for UE supporting power class 2,3 or 4.

The reported L1-RSRP value shall include the Rx antenna gain in the range of -10 to +20 dB.

The rate of correct events observed during repeated tests shall be at least 90%.

A.17.6.3.3 CSI-RS based L1-RSRP measurement when DRX is not used

A.17.6.3.3.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.2, with the testing configurations for NR cells in Table A.17.6.3.3.1-1.

Table A.17.6.3.3.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

Config	Description
1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations

A.17.6.3.3.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.17.6.3.3.2-1 and Table A.17.6.3.3.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 480ms from the beginning of the test, the DCI trigger comes in slot 1 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.17.6.3.3.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.17.6.3.3.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
BW _{channel}	1	MHz	100: N _{RB,C} = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS configuration	1		CSI-RS.3.3 TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
SMTC configuration	1		SMTC.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		Off
reportConfigType	1		aperiodic
reportQuantity	1		cri-RSRP
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1		8
Propagation condition	1		AWGN
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			
EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.17.6.3.3.2-1: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1		Setup 1 according to A.3.15.1	

Beam Assumption ^{Note 4}	1		Rough	Rough
N_{oc} ^{Note1}	1	dBm/15kHz	-105	
N_{oc} ^{Note1}	1	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1	dB	0	9
CSI-RS RSRP ^{Note2}	1	dBm/SSB SCS	-95.97	-86.97
I_o ^{Note2}	1	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1	dB	0	9
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.17.6.3.3.3 Test Requirements

After 480ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.20.1. The reported L1-RSRP value shall include the Rx antenna gain in the range of [-10 ~ +20] dB.

For absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1, the UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.17.6.3.3.3-1.

For relative accuracy of CSI-RS0 compared with CSI-RS1, the UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.17.6.3.3.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
CSI-RS0	$\text{CSI-RS_RP0} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP0} + \delta + G_{\max}$
CSI-RS1	$\text{CSI-RS_RP1} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP1} + \delta + G_{\max}$
Note 1: CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration Note 2: δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the I_o used in the test Note 3: $G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class	

A.17.6.3.4 CSI-RS based L1-RSRP measurement when DRX is used

A.17.6.3.4.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of L1-RSRP measurement. This test will partly verify the L1-RSRP measurement requirements in clause 9.5B.4.2, with the testing configurations for NR cells in Table A.17.6.3.4.1-1.

Table A.17.6.3.4.1-1: Applicable NR configurations for FR2 CSI-RS based L1-RSRP test

Config	Description
--------	-------------

1	NR 120 kHz CSI-RS SCS, 100 MHz bandwidth, TDD duplex mode
Note:	The UE is only required to be tested in one of the supported test configurations

A.17.6.3.4.2 Test parameters

There is one cells in the test, the FR2 PCell (Cell 1). The test parameters for the Cell 1 are given in Table A.17.6.3.4.2-1 and Table A.17.6.3.4.2-2 below.

In CSI measurement configuration, UE is indicated to perform L1-RSRP measurement on the CSI-RS and report aperiodically. The test consists of a single time period T1, during which the UE is triggered via DCI to report L1-RSRP on aperiodic CSI-RS resources. UE is also configured to measure L1-RSRP based on SSB. After 1440ms from the beginning of the test, the DCI trigger comes in slot 1 of a frame and UE provides the report back based on the reporting configuration as defined in Table A.17.6.3.4.2-1.

There is no measurement gap configured in the test. Before the test, UE is configured to perform RLM and BFD based on the SSBs.

Table A.17.6.3.4.2-1: General test parameters

Parameter	Config	Unit	Value
SSB GSCN	1		freq1
Duplex mode	1		TDD
TDD Configuration	1		TDDConf.3.1
BW _{channel}	1	MHz	100: N _{RB,c} = 66
PDSCH Reference measurement channel	1		SR.3.1 TDD
RMSI CORESET Reference Channel	1		CR.3.1 TDD
Dedicated CORESET Reference Channel	1		CCR.3.1 TDD
SSB configuration	1		SSB.1 FR2
CSI-RS configuration	1		CSI-RS.3.3 TDD
OCNG Patterns	1		OP.1
Initial BWP Configuration	1		DLBWP.0.1 ULBWP.0.1
Dedicated BWP configuration	1		DLBWP.1.1 ULBWP.1.1
SMTc configuration	1		SMTc.1
TRS Configuration	1		TRS.2.1 TDD
PDCCH/PDSCH TCI Configuration	1		TCI.State.2
DRX configuration	1		DRX.3
reportConfigType	1		aperiodic
reportQuantity	1		cri-RSRP
Number of reported RS	1		2
qcl-Info	1		SSB#0 for resource#0 SSB#1 for resource#1
reportSlotOffsetList	1		8
Propagation condition	1		AWGN
T1	1	s	5
EPRE ratio of PSS to SSS	1	dB	0
EPRE ratio of PBCH DMRS to SSS			
EPRE ratio of PBCH to PBCH DMRS			
EPRE ratio of PDCCH DMRS to SSS			
EPRE ratio of PDCCH to PDCCH DMRS			

EPRE ratio of PDSCH DMRS to SSS			
EPRE ratio of PDSCH to PDSCH DMRS			
EPRE ratio of OCNG DMRS to SSS ^{Note 1}			
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			

Table A.17.6.3.4.2-1: CSI-RS specific test parameters

Parameter	Config	Unit	CSI-RS#0	CSI-RS#1
Angle of arrival configuration	1		Setup 1 according to A.3.15.1	
Beam Assumption ^{Note 4}	1		Rough	Rough
N_{oc} ^{Note1}	1	dBm/15kHz	-105	
N_{oc} ^{Note1}	1	dBm/SSB SCS	-95.97	
$\hat{E}_s / I_{ot}$	1	dB	0	9
CSI-RS RSRP ^{Note2}	1	dBm/SSB SCS	-95.97	-86.97
I_o ^{Note2}	1	dBm/95.04MHz	-63.97	-57.47
$\hat{E}_s / N_{oc}$	1	dB	0	9
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 3: CSI-RS RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 4: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.7.6.3.3.3 Test Requirements

After 1440ms from the beginning of the test, the UE shall send L1-RSRP report at slot 8 from the reception of DCI triggering the L1-RSRP measurement. The L1-RSRP report shall include the results for both CSI-RS#0 and CSI-RS#1 while meeting the accuracy requirements defined in clause 10.1.20.1. The reported L1-RSRP value shall include the Rx antenna gain in the range of [-10 ~ +20] dB.

For absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1, the UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.17.6.3.4.3-1.

For relative accuracy of CSI-RS0 compared with CSI-RS1, the UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table 10.1.20.2.2-1.

Table A.17.6.3.4.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
CSI-RS0	$\text{CSI-RS_RP0} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP0} + \delta + G_{\max}$
CSI-RS1	$\text{CSI-RS_RP1} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP1} + \delta + G_{\max}$

Note 1:	CSI-RS_RP _n is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS _n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.20.2.1-1, selected according to the I_o used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.17.6.4 NR Measurements with autonomous gaps

A.17.6.4.1 SA interfrequency CGI reporting in autonomous gaps test (PCell in FR2) for 2 RX UE

A.17.6.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an CGI. This test will partly verify the SA inter-frequency NR cell search requirements in clause 9.11A

In this test, there are two cells: NR cell 1 as PCell in FR2 on NR RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 2. The test parameters and configurations are given in Tables A.17.6.4.1.1-1, A.17.6.4.1.1-2, and A.17.6.4.1.1-3.

Measurement gap patterns are configured. During T1 the UE shall report event A3 for cell 2. Within 3 seconds of the event report, the test equipment shall add a measurement reporting configuration using *ReportConfigNR* which contains a ReportCGI IE with cellForWhichToReportCGI set to the physical Cell ID of cell 2 and including the optional IE useAutonomousGaps-r16

In the measurement control information, it is indicated to the UE to decode the CGI of the neighbour cell using autonomous gaps. The test consists of two time phases, T1 and T2. Time period T2 begins when the last TTI containing the RRC message implying SI reading is sent to the UE

Supported test configurations are shown in table A.17.6.4.1.1-1.

Table A.17.6.4.1.1-1 SA interfrequency CGI reporting test in autonomous gaps

Config	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.6.4.1.1-2: General test parameters for SA interfrequency CGI reporting in autonomous gaps

Parameter	Unit	Test configuration	Value	Comment
NR RF Channel Number		Config 1	1, 2	Two FR2 NR carrier frequencies is used.
Active cell		Config 1	NR cell 1 (PCell)	NR Cell 1 is on NR RF channel number 1.
Neighbour cell		Config 1	NR cell 2	NR cell 2 is on NR RF channel number 2.
Gap Pattern Id		Config 1	13	As specified in clause 9.1.2-1.
Measurement gap offset		Config 1	39	

SMTC-SSB parameters		Config 1	SSB.3 FR2	As specified in clause A.3.10.2
SI-RNTI scheduling rate	ms		20 ms	S-RNTI scheduled on 8 occasions per 160ms transmission period
A3-Offset	dB	Config 1	-15	
Hysteresis	dB	Config 1	0	
CP length		Config 1	Normal	
TimeToTrigger	s	Config 1	0	
Filter coefficient		Config 1	0	L3 filtering is not used
DRX		Config 1	OFF	DRX is not used
Time offset between serving and neighbour cells		Config 1	3μs	Synchronous cells.
T1	s	Config 1	<10	UE expected to report event A3 for cell 2 within 5,2s (PC1) or 3.5s (other PC) of the start of T1. Test equipment shall configure CGI reporting within 3s after receiving the event A3 report. T2 begins 10ms after test equipment has transmitted the RRC reconfiguration to configure CGI reporting.
T2	s	Config 1	1	

Table A.17.6.4.1.1-3: Cell specific test parameters SA interfrequency CGI reporting in autonomous gaps

Parameter		Unit	Test configuration	Cell 1		Cell 2	
				T1	T2	T1	T2
AoA setup			Config 1	Setup 3 as specified in clause A.3.15			
				AoA1		AoA2	
Beam Assumption ^{Note 7}			Config 1	Rough			
NR RF Channel Number			Config 1	1		2	
Duplex mode			Config 1	TDD		TDD	
TDD configuration			Config 1	TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP BW		MHz	Config 1	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		Config 1	DLBWP.0.1		N/A	
	Initial UL BWP			ULBWP.0.1		N/A	
	Dedicated DL BWP			DLBWP.1.1		N/A	
	Dedicated UL BWP			ULBWP.1.1		N/A	
OCNG Patterns defined in A.3.2.1.1 (OP.1)			Config 1	OP.1		Not sent	
PDSCH Reference measurement channel			Config 1	SR.3.1 TDD		-	
CORESET Reference Channel			Config 1	CR.3.1 TDD		-	

SMTC configuration defined in A.3.11.1 and A.3.11.2		Config 1	SMTC.1	SMTC.1
PDSCH/PDCCH subcarrier spacing	kHz	Config 1	120	120
TRS configuration		Config 1	TRS.2.1 TDD	N/A
TCI configuration		Config 1	CSI-RS.Config.0	N/A
EPRE ratio of PSS to SSS		Config 1	0	0
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS(Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note2}	dBm/15 kHz ^{Note5}		-99.03	-99.03
N_{oc} ^{Note2}	dBm/S CS ^{Note4}	Config 1	-90	-90
SS-RSRP ^{Note 3}	dBm/S CS ^{Note5}	Config 1	-87	-93
$\hat{E}_s/I_{ot}$	dB	Config 1	3	-3
$\hat{E}_s/N_{oc}$	dB	Config 1	3	-3
I_o ^{Note3}	dBm/95 .04 MHz ^{Note5}	Config 1	-56.25	-59.25
Propagation Condition		Config 1	AWGN	
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 6: As observed with 0 dBi gain antenna at the centre of the quiet zone				
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.17.6.4.1.2 Test Requirements

The UE shall report the CGI of cell 2 within RRC procedure delay + $25 \cdot T_{\text{smtc}} + 6 \cdot T_{\text{RMSI-scheduling}} + 20\text{ms} + 2\text{ms} = 652\text{ ms}$ from the start of T2, allow 655ms. The rate of correct events observed during repeated tests shall be at least 90%.

The UE shall be scheduled continuously throughout the test, and from the start of T3 until 655 ms the number of interrupted slots shall not exceed the allowed number as defined in clause 9.11A.4.

The rate of correct events observed during repeated tests shall be at least 90%.

NOTE: The actual overall delays measured in the test may be up to $2 \cdot T_{\text{TTI}_{\text{DCCH}}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.17.7 Measurement Performance requirements

A.17.7.1 SS-RSRP

A.17.7.1.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.17.7.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy for RedCap UE is within the specified limits. This test will verify the requirements in clauses 10.1.3A.3 for intra-frequency measurements.

A.17.7.1.1.2 Test parameters

In this set of test cases all cells are on the same carrier frequency. Supported test configurations are shown in Table A.17.7.1.1.2-1. Both absolute and relative accuracy of SS-RSRP intra-frequency measurements are tested by using the parameters in Table A.17.7.1.1.2-2 and A.17.7.1.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1. The test consists of two time phases T1 and T2.

Table A.17.7.1.1.2-1: SS-RSRP Intra frequency SS-RSRP supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.7.1.1.2-2: SS-RSRP Intra frequency general test parameters

Parameter	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
Cell ID		489	0	489	0
SSB ARFCN		freq1		freq1	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		24		24	
Downlink initial BWP configuration		DLBW P.0.1	-	DLBW P.0.1	-
Downlink dedicated BWP configuration		DLBW P.1.1	-	DLBW P.1.1	-
Uplink initial BWP configuration		ULBW P.0.1	-	ULBW P.0.1	-

Uplink dedicated BWP configuration		ULBW P.1.1	-	ULBW P.1.1	-
DRX cycle configuration		Not applicable	-	Not applicable	-
TRS configuration		TRS.2.1 TDD	-	TRS.2.1 TDD	-
TCI state		TCI.State.0	-	TCI.State.0	-
PDSCH Reference measurement channel		SR.3.2 TDD	-	SR.3.2 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-
Dedicated CORESET Reference channel		CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns		OP.3	OP.3	OP.3	OP.3
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2
SMTc configuration		SMTc.1	SMTc.1	SMTc.1	SMTc.1
Time offset with Cell 1	μ s	-	3	-	3
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Propagation conditions		AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 2: Void Note 3: Void Note 4: Void Note 5: Void					

Table A.17.7.1.1.2-3: SS-RSRP Intra frequency OTA related test parameters

Parameter	Unit	T1		T2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1			
Assumption for UE beams ^{Note 7}		Rough		Rough	

N_{OC} Note1	dBm/15kHz z_{Note4}	-91.6		N/A	
N_{OC} Note1	dBm/SCS Note4	-82.6		N/A	
$\hat{E}_s/N_{oc}$	dB	6.0	1.0	N/A	N/A
E_s	dBm/SCS Note4			(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
SSB_RP ^{Note2}	dBm/SCS	-76.6	-81.6	(Table B.2.2-2 Rx Beam Peak +2.1dB)	(Table B.2.2-2 Rx Beam Peak +2.1dB)
$\hat{E}_s/I_{ot_{BB}}$ Note6	dB	2.44	-5.98	-5.98	-5.98
I_o ^{Note2}	dBm/95.04 MHz Note4	-50.05		(Table B.2.2-2 Rx Beam Peak +29.70dB)	
Note 1:	Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2:	SSB_RP, E_s/I_{ot} and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	Void				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	Void				
Note 6:	Calculation of $E_s/I_{ot_{BB}}$ includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB_P from TS 38.101-2 [19] Table 6.2.1.3-4.				
Note 7:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.17.7.1.1.3 Test Requirements

The SS-RSRP measurement accuracy shall fulfil the absolute accuracy requirements in clauses 10.1A.3.1.1 and relative accuracy requirements in clause 10.1A.3.1.2. The following requirements are to be verified:

During T1:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table A.17.7.1.1.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1A.3.1.2-1.

During T2:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in table A.17.7.1.1.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1A.3.1.2-1.

During T1 and T2:

Relative accuracy of Cell 1 during T2 compared with Cell 1 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1A.3.1.2-1

Relative accuracy of Cell 2 during T2 compared with Cell 2 during T1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table 10.1A.3.1.2-1.

Table A.17.7.1.1.3-1: SS-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
Cell 1	$SSB_RP1 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP1 + \delta + G_{max}$
Cell 2	$SSB_RP2 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP2 + \delta + G_{max}$
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.3.1.1-1, selected according to the α used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.17.7.1.2 SA inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell

A.17.7.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 10.1A.5.1.1 and 10.1.5A.1.2 for intrer-frequency measurements with the testing configurations for NR cells in Table A.17.7.1.2.1-1.

Table A.17.7.1.2.1-1: Applicable NR configurations for FR2 inter-frequency SS-RSRP accuracy test

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	240 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

A.17.7.1.2.2 Test parameters

In this set of test cases there are two cells in the test, PCell (Cell 1) and a FR2 neighbour cell (Cell 2) on a different frequency than the PCell. The test parameters and applicability for Cell 1 are defined in A.3.7.2. The test parameters for the Cell 1 and Cell 2 are given in Table A.17.7.1.2.2-1 and Table A.17.7.1.2.2-2 below. Both absolute and relative accuracy of RSRP inter-frequency measurements are tested by using the parameters in A.17.7.1.2.2-1

The inter-frequency measurements are supported by a measurement gap.

Table A.17.7.1.2.2-1: SS-RSRP inter-frequency test parameters

Parameter		Config	Unit	Test 1		Test 2	
				Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		1~2		freq1	freq2	freq1	freq2
BW _{channel}		1~2		100: N _{RB,C} = 66		100: N _{RB,C} = 66	
Data RBs allocated		1		24		24	
		2		48		48	
Gap pattern ID				0		0	
Duplex mode		1~2		TDD		TDD	
TDD configuration		1~2		TDDConf.3.1		TDDConf.3.1	
PDSCH Reference measurement channel		1		SR.3.2 TDD	-	SR.3.2 TDD	-
		2		SR.3.3 TDD		SR.3.3 TDD	
		1		CR.3.1 TDD	-	CR.3.1 TDD	-

RMSI CORESET Reference Channel		2		CR.3.2 TDD		CR.3.2 TDD	
Dedicated CORESET Reference Channel		1		CCR.3.1 TDD	-	CCR.3.1 TDD	-
		2		CCR.3.7 TDD		CCR.3.7 TDD	
SSB configuration		1		SSB.3 FR2		SSB.3 FR2	
		2		SSB.4 FR2		SSB.4 FR2	
PDSCH/PDCCH subcarrier spacing		1~2	kHz	120		120	
OCNG Patterns		1~2		OP.3		OP.3	
Initial BWP Configuration		1~2		DLBWP.0.1 ULBWP.0.1		DLBWP.0.1 ULBWP.0.1	
Dedicated BWP configuration		1~2		DLBWP.1.3 ULBWP.1.3		DLBWP.1.3 ULBWP.1.3	
TRS Configuration		1~2		TRS.2.1 TDD		TRS.2.1 TDD	
PDCCH/PDSCH TCI Configuration		1~2		TCI.State.2		TCI.State.2	
SMTc configuration		1~2		SMTc.1		SMTc.1	
Time offset between Cell 2 and Cell 1		1~2	μs	3		3	
EPRE ratio of PSS to SSS		1~2	dB	0	0	0	0
EPRE ratio of PBCH DMRS to SSS							
EPRE ratio of PBCH to PBCH DMRS							
EPRE ratio of PDCCH DMRS to SSS							
EPRE ratio of PDCCH to PDCCH DMRS							
EPRE ratio of PDSCH DMRS to SSS							
EPRE ratio of PDSCH to PDSCH DMRS							
EPRE ratio of OCNG DMRS to SSS ^{Note 1}							
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}							
Propagation condition		1~2	-	AWGN	AWGN	AWGN	AWGN
Antenna configuration		1~2	-	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.							
Note 2: Void.							

Table A.17.7.1.2.2-2: SS-RSRP inter frequency OTA related test parameters

Parameter	Config	Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration	1~2		Setup 4b according to clause A.3.15.4.2		Setup 4b according to clause A.3.15.4.2	
			AoA1 Spherical coverage	AoA2 Rx Beam Peak	AoA1 Spherical coverage	AoA2 Rx Beam Peak
Assumption for UE beams ^{Note 7}	1~2		Rough		Rough	
N_{oc} ^{Note1}	1	dBm/15kHz ^{Note4}	-90.6	-90.6	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +1.97dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} -3.03dB)
	2		-93.7	-93.7		
N_{oc} ^{Note1}	1	dBm/SCS ^{Note4}	-81.6	-81.6	(Table B.2.3-2 Rx Beam	(Table B.2.3-2 Rx Beam

					Peak ^{Note 8} +11.0dB)	Peak ^{Note 8} +6.0dB)
	2		-81.7	-81.7	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +14.0dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +9.0dB)
$\hat{E}_s / N_{oc}$	1~2	dB	6.0	6.0	17.0	-1.0
SSB_RP ^{Note2}	1	dBm/SCS	-75.6	-75.6	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +28.0dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +5.0dB)
	2		-75.7	-75.7	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +31.0dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +8.0dB)
(SSB_RP _{Cell 1} – SSB_RP _{Cell 2})	1~2	dB	0		23.00	
$\hat{E}_s / I_{ot\ BB}$ ^{Note6}	1	dB	5.26	5.96	9.53	-3.46
	2		4.61	5.91		
I _o ^{Note2}	1	dBm/95.04 MHz ^{Note4}	-50.00	-50.00	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +52.68dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +33.13dB)
	2		-50.09	-50.09	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +55.69dB)	(Table B.2.3-2 Rx Beam Peak ^{Note 8} +36.14dB)
(I _{ofreq 1} – I _{ofreq 2})	1~2	dB	0		19.55	
Note 1: Where used, interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.						
Note 2: SSB_RP, Es/I _{ot} , I _o , (SSB_RP _{Cell 2} – SSB_RP _{Cell 1}) and (I _{ofreq 2} – I _{ofreq 1}) levels have been derived from other parameters for information purposes. They are not settable parameters themselves.						
Note 3: Void						
Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone						
Note 5: Void						
Note 6: Calculation of Es/I _{otBB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P or ΔMB _S from TS 38.101-2 [19] Table 6.2.1.3-4.						
Note 7: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation						
Note 8: The value in Table B.2.3-2 is the Minimum SSB_RP for SCS _{SSB} = 120 kHz, selected according to the operating band of Cell 2 and UE power class, without ΔMB _{P,n} adjustment.						

A.17.7.1.2.3 Test Requirements

The SS-RSRP measurement accuracy for Cell 1 and Cell 2 shall fulfil the absolute requirements in clause 10.1A.5.1.1 and the relative requirements in clause 10.1.5A.1.2.

Test 1:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.17.7.1.2.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table A.17.7.1.2.3-2.

Test 2:

Absolute accuracy of Cell 1 and absolute accuracy of Cell 2. The UE is deemed to meet the requirement if the reported SS-RSRP is in the range shown in Table A.17.7.1.2.3-1.

Relative accuracy of Cell 2 compared with Cell 1. The UE is deemed to meet the requirement if the difference in reported SS-RSRP meets the requirements in Table A.17.7.1.2.3-2.

Table A.17.7.1.2.3-1: SS-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3,4}
Cell 1	$SSB_RP1 - \delta + G_{min} + X \leq \text{Reported RSRP(dBm)} \leq SSB_RP1 + \delta + G_{max}$
Cell 2	$SSB_RP2 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP2 + \delta + G_{max}$
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table 10.1.5.1.1-1, selected according to the I_o used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.

Table A.17.7.1.2.3-2: SS-RSRP relative accuracy test requirement

	Test requirement ^{Notes1,2,3,4, 5, 6}
Cell 2 – Cell 1	$SSB_RP2 - SSB_RP1 - \delta - D - G_{inter} \leq \text{Reported RSRP(dB)} \leq SSB_RP2 - SSB_RP1 + \delta + G_{inter} - (X)$
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the cell n under consideration
Note 2:	δ is the RSRP relative accuracy requirement from Table 10.1.5.1.2-1
Note 3:	Void
Note 4:	X is the Spherical coverage gain difference in dB, derived as (UE Refsens - UE Spherical coverage) from TS 38.101-2 [19] clauses 7.3.2 and 7.3.4, selected according to the UE power class and operating band. X is always a negative value.
Note 5:	$D = [5.5\text{dB}]$. D is the margin due to mis-alignment between fine beam and rough beam.
Note 6:	$G_{inter} = [3\text{dB}]$. G_{inter} is the margin due to different antenna gain caused by frequency separation.

A.17.7.2 SS-RSRQ

A.17.7.2.1 SA intra-frequency measurement accuracy with FR2 serving cell and FR2 target cell

A.17.7.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.7.

A.17.7.2.1.2 Test Parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.17.7.2.1.2-1. . The absolute accuracy of SS-RSRQ intra-frequency measurement is test by using the parameters in Table A.17.7.2.1.2-2 and Table A.17.7.2.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell.

Table A.17.7.2.1.2-1: SS-RSRQ Intra frequency SS-RSRQ supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.7.2.1.2-2: SS-RSRQ Intra frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			Freq1		Freq1	
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated			66		66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2.1 TDD		TRS.2.1 TDD	
TCI state			TCI.State .0		TCI.State .0	
PDSCH Reference measurement channel			SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	
Control channel RMC			CCR.3.1 TDD	-	CCR.3.1 TDD	-
OCNG Patterns			OP.1	OP.1	OP.1	OP.1
SMTC configuration			SMTC.1			
SSB configuration			SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
PDSCH/PDCCH subcarrier spacing		kHz	120	120	120	120
SS-RSSI-Measurement			Not Applicable			
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
Propagation condition			AWGN		AWGN	
Antenna configuration			1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void						
Note 3: Void						
Note 4: Void						
Note 5: Void.						

Table A.17.7.2.1.2-3: SS-RSRQ Intra frequency OTA related test parameters

	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 9}		Rough			
N_{OC} ^{Note1}	dBm/15kHz ^{Note4}	-95		-95	
N_{OC} ^{Note1}	dBm/SCS ^{Note3}	-86		-86	
$\hat{E}_s / N_{oc}$	dB	3		3	
SSB_RP ^{Note2}	dBm/SCS ^{Note4}	-83	-83	-89	-89
SS-RSRQ ^{Note2}	dB	-14.77	-14.77	-16.81	-16.81
$\hat{E}_s / I_{ot}$	dB	-1.76	-1.76	-4.76	-4.76
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-50		-54	
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 2: SS-RSRQ, SSB_RP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					
Note 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.					
Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone					
Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone					
Note 6: Void					
Note 7: Void					
Note 8: Void					
Note 9: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.17.7.2.1.3 Test Requirements

The SS-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal SS-RSRQ+2.5dB to Nominal SS-RSRQ-2.5dB and the SS-RSRQ measurement accuracy in test 2 shall be within the range Nominal RSRQ+3.5dB to Nominal RSRQ-3.5dB according to the requirements in clause 10.1.8.1.1. Nominal RSRQ is the value shown in table A.17.7.2.1.2-3.

A.17.7.2.2 SA Inter-frequency measurement accuracy with FR2 serving cell and FR2 TDD target cell for 2 Rx UE

A.17.7.2.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-RSRQ measurement accuracy is within the specified limits. This test will verify the requirements in clause 10.1A.9.1.1 and 10.1A.9.1.2 for inter-frequency measurement.

A.17.7.2.2.2 Test parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.17.7.2.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-RSRQ inter-frequency measurement are tested by using test parameters in Table A.17.7.2.2.2-2 and Table A.17.7.2.2.2-3. In all test cases, Cell 1 is the PCell and Cell 2 is target cell.

Table A.17.7.2.2-1: SS-RSRQ Inter frequency SS-RSRQ supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.7.2.2-2: SS-RSRQ Inter frequency test parameters

Parameter		Unit	Test 1		Test 2	
			Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN			Freq1	freq2	freq1	Freq2
SSB Configuration			SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
Duplex mode			TDD		TDD	
TDD configuration			TDDConf.3.1		TDDConf.3.1	
BW _{channel}		MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66	
BWP configuration	Initial DL BWP		DLBWP.0.1			
	Dedicated DL BWP		DLBWP.1.1			
	Initial UL BWP		ULBWP.0.1			
	Dedicated UL BWP		ULBWP.1.1			
TRS configuration			TRS.2. 1 TDD	-	TRS.2. 1 TDD	-
TCI state			TCI.Sta te.0	-	TCI.Sta te.0	-
Data RBs allocated			66		66	
PDSCH Reference measurement channel			SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel			CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns			OP.1	OP.1	OP.1	OP.1
SMTC configuration			SMTC. 1	SMTC. 1	SMTC. 1	SMTC. 1
PDSCH/PDCCH subcarrier spacing		kHz	120	120	120	120
EPRE ratio of PSS to SSS		dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						
EPRE ratio of PDCCH_DMRS to SSS						
EPRE ratio of PDCCH to PDCCH_DMRS						
EPRE ratio of PDSCH_DMRS to SSS						
EPRE ratio of PDSCH to PDSCH_DMRS						
EPRE ratio of OCNG DMRS to SSS ^{Note 1}						
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}						
Propagation conditions			AWGN	AWGN	AWGN	AWGN
Antenna configuration			1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.						
Note 2: Void						
Note 3: Void						
Note 4: Void						

Table A.17.7.2.2-3 SS-RSRQ Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
AoA setup		Setup 1 in clause A.3.15.		Setup 1 in clause A.3.15.	
Assumption for UE beams ^{Note 8}		Rough		Rough	

N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-94.03	-94.03	-94.03	-94.03
N_{oc} ^{Note1}	dBm/SCS ₃ ^{Note}	-85.0	-85.0	-85.0	-85.0
$\hat{E}_s / N_{oc}$	dB	-1.75		-1.75	
SSB_RP ^{Note2}	dBm/SCS _{Note4}	-86.75	-86.75	-88	-88
SS-RSRQ ^{Note2}	dB	-14.75	-14.75	-15.56	-15.56
$\hat{E}_s / I_{ot}$	dB	-1.75	-1.75	-3	-3
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-53.8	-53.8	-54.25	-54.25
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-RSRQ, SSB_RP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-RSRQ and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone Note 5: As observed with 0dBi gain antenna at the centre of the quiet zone Note 6: Void Note 7: Void Note 8: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					

A.17.7.2.2.3 Test Requirements

The SS-RSRQ absolute measurement accuracy in test 1 shall be within the range Nominal SS-RSRQ+2.5dB to Nominal SS-RSRQ -2.5dB and the SS-RSRQ measurement accuracy in test 2 shall be within the range Nominal SS-RSRQ +3.5dB to Nominal SS-RSRQ -3.5dB according to the requirements in clause 10.1A.10.1.1.

The SS-RSRQ relative measurement accuracy shall fulfil the requirements in clause 10.1A.10.1.2.

A.17.7.3 L1-RSRP measurement for beam reporting

A.17.7.3.1 SSB based L1-RSRP measurement

A.17.7.3.1.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 9.5B.2 and clause [10.xx.xx.1] for L1-RSRP measurements based on SSB with the testing configurations for NR cells in Table A.7.7.4.1.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

A.17.7.3.1.2 Test parameters

Test parameters are the same as in clause A.7.7.4.1.2.

A.17.7.3.1.3 Test Requirements

After 320ms from the beginning of the test, the L1-RSRP measurement accuracy for SSB#0 and SSB#1 of Cell 2 shall fulfil the requirements in clauses [10.xx.xx.1]. The following requirements are to be verified:

For Test 1:

Absolute accuracy of SSB0 and absolute accuracy of SSB1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.17.7.3.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table [10.xx.xx.1.2-1].

For Test 2:

Absolute accuracy of SSB0 and absolute accuracy of SSB1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.17.7.3.1.3-1.

Relative accuracy of SSB0 compared with SSB1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table [10.xx.xx.1.2-1].

Table A.17.7.3.1.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
SSB0	$SSB_RP0 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP0 + \delta + G_{max}$
SSB1	$SSB_RP1 - \delta + G_{min} \leq \text{Reported RSRP(dBm)} \leq SSB_RP1 + \delta + G_{max}$
Note 1:	SSB_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the SSB n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table [10.xx.xx.1.1-1], selected according to the I_o used in the test
Note 3:	G_{min} and G_{max} are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.17.7.3.2 CSI-RS based L1-RSRP measurement on resource set with repetition off

A.17.7.3.2.1 Test Purpose and Environment

The purpose of this test is to verify that the L1-RSRP measurement accuracy is within the specified limits. This test will verify the requirements in clauses 9.5.3 and clause [10.1.xx.2] for L1-RSRP measurements based on CSI-RS with the testing configurations for NR cells in Table A.7.7.4.2.1-1.

The AoA setup for this test is Setup 1 as defined in clause A.3.15.

A.17.7.3.2.2 Test parameters

Test parameters are the same as in clause A.7.7.4.2.2.

A.17.7.3.2.3 Test Requirements

After 640ms from the beginning of the test, the L1-RSRP measurement accuracy for CSI-RS#0 and CSI-RS#1 of Cell 1 shall fulfil the requirements in clause [10.1.xx.2]. The following requirements are to be verified:

For Test 1:

Absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.17.7.3.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table [10.1.xx.2.2-1].

For Test 2:

Absolute accuracy of CSI-RS0 and absolute accuracy of CSI-RS1. The UE is deemed to meet the requirement if the reported L1-RSRP is in the range shown in Table A.17.7.3.2.3-1.

Relative accuracy of CSI-RS0 compared with CSI-RS1. The UE is deemed to meet the requirement if the difference in reported L1-RSRP meets the requirements in Table [10.1.xx.2.2-1].

Table A.17.7.3.2.3-1: L1-RSRP absolute accuracy test requirement

	Test requirement ^{Notes1,2,3}
CSI-RS0	$\text{CSI-RS_RP0} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP0} + \delta + G_{\max}$
CSI-RS1	$\text{CSI-RS_RP1} - \delta + G_{\min} \leq \text{Reported RSRP(dBm)} \leq \text{CSI-RS_RP1} + \delta + G_{\max}$
Note 1:	CSI-RS_RPn is the equivalent power received by an antenna with 0dBi gain at the centre of the quiet zone configured in the test for the CSI-RS n under consideration
Note 2:	δ is the RSRP absolute accuracy requirement from Table [10.1.xx.2.1-1], selected according to the Io used in the test
Note 3:	$G_{\min}$ and $G_{\max}$ are the minimum and maximum UE gain values from Table B.2.1.5.1-1, selected according to the UE power class

A.17.7.4 SS-SINR

A.17.7.4.1 SA intra-frequency case measurement accuracy with FR2 serving cell and FR2 target cell for 2Rx UE

A.17.7.4.1.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.13.1.1.

A.17.7.4.1.2 Test parameters

In this test case all cells are on the same carrier frequency. Supported test configurations are shown in Table A.17.7.4.1.2-1. The absolute accuracy of SS-SINR intra-frequency measurement is test by using the parameters in Table A.17.7.4.1.2-2 and Table Table A.17.7.4.1.2-3. In all test cases, Cell 1 is the PCell and Cell 2 the target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.17.7.4.1.2-1: SS-SINR Intra frequency SS-SINR supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.7.4.1.2-2: SS-SINR Intra frequency test parameters

Parameter	Unit	Test 1		Test 2	
		Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		Freq2		Freq2	
Duplex mode		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,C} = 66		100: N _{RB,C} = 66	
Data RBs allocated		66		66	
Downlink initial BWP configuration		DLBWP.0.1			
Downlink dedicated BWP configuration		DLBWP.1.1			
Uplink initial BWP configuration		ULBWP.0.1			
Uplink dedicated BWP configuration		ULBWP.1.1			
DRX cycle configuration	ms	Not applicable			
TRS configuration		TRS.2.1 TDD			

TCI state		TCI.State.0			
PDSCH Reference measurement channel		SR.3.1 TDD		SR.3.1 TDD	
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	
Dedicated RMSI CORESET Reference Channel		CCR.3 .1 TDD	-	CCR.3. 1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC.1			
SSB configuration		SSB.1 FR2	SSB.1 FR2	SSB.1 FR2	SSB.1 FR2
PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120
SS-RSSI-Measurement		Not Applicable			
EPRE ratio of PSS to SSS	dB	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS					
EPRE ratio of PBCH to PBCH_DMRS					
EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS ^{Note 1}					
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}					
Propagation conditions		AWGN			
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Void					
Note 3: Void					
Note 4: Void					

Table A.17.7.4.1.2-3: SS-SINR Intra frequency OTA related test parameters

Parameter	Unit	Test 1		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration		Setup 1 according to clause A.3.15.1		Setup 1 according to clause A.3.15.1	
Assumption for UE beams ^{Note 9}		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-105		-105	
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-96		-96	
$\hat{E}_s / N_{oc}$	dB	4.54		2.66	
SSB_RP ^{Note2}	dBm/SCS ^{Note4}	-91.46	-93.34	-99	-99
SS-SINR ^{Note2}	dB	0	-3.2	-4.76	-4.76
$\hat{E}_s / I_{ot}$	dB	0	-3.2	-4.76	-4.76
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-59.2		-64	
Note 1:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 2:	SS-SINR, SSB_RP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 3:	SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 4:	Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone				
Note 5:	As observed with 0 dBi gain antenna at the centre of the quiet zone				

Note 6:	Void
Note 7:	Void
Note 8:	Void
Note 9:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.17.7.4.1.3 Test Requirements

The SS-SINR absolute measurement accuracy in test 1 shall be within the range Nominal SS-SINR+3B to Nominal SS-SINR -3dB and the SS-SINR measurement accuracy in test 2 shall be within the range Nominal SS-SINR +3.5dB to Nominal SS-SINR -3.5dB according to the requirements in clause 10.1A.10.13.1.

A.17.7.4.2 SA inter-frequency case measurement accuracy with FR2 serving cell and FR2 target cell for 2Rx UE

A.17.7.4.2.1 Test Purpose and Environment

The purpose of this test is to verify that the SS-SINR measurement accuracy is within the specified limits. This test will verify the requirements in Clause 10.1A.13.1.1 and 10.1A.13.1.2 for inter-frequency measurement.

A.17.7.4.2.2 Test Parameters

In this test case the two cells (i.e., Cell 1 and Cell 2) are on different carrier frequencies and measurement gaps are provided. Supported test configurations are shown in Table A.17.7.4.2.2-1. Both absolute accuracy and relative accuracy requirements of SS-SINR inter-frequency measurement are tested by using test parameters in Table A.17.7.4.2.2-2 and Table A.17.7.4.2.2-3. In all test cases, Cell 1 is the PCell and Cell 2 is target cell. The TCI status for Cell 1 is defined in Table A.3.16.2-1 and TRS configuration for Cell 1 is defined in Table A.3.17.2.1-1.

Table A.17.7.4.2.2-1: SS-SINR Inter frequency supported test configurations

Configuration	Description
1	120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode

Table A.17.7.4.2.2-2: SS-SINR Inter frequency general test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
SSB ARFCN		freq1	freq2	freq1	freq2	freq1	freq2
Duplex mode		TDD		TDD		TDD	
TDD configuration		TDDConf.3.1		TDDConf.3.1		TDDConf.3.1	
BW _{channel}	MHz	100: N _{RB,c} = 66		100: N _{RB,c} = 66		100: N _{RB,c} = 66	
Data RBs allocated		66		66		66	
Downlink initial BWP configuration		DLBWP.0.1					
Downlink dedicated BWP configuration		DLBWP.1.1					
Uplink initial BWP configuration		ULBWP.0.1					
Uplink dedicated BWP configuration		ULBWP.1.1					
DRX cycle configuration	ms	Not applicable					
TRS configuration		TRS.2.1 TDD					
TCI state		TCI.State.0					
PDSCH Reference measurement channel		SR.3.1 TDD	-	SR.3.1 TDD	-	SR.3.1 TDD	-
RMSI CORESET Reference Channel		CR.3.1 TDD	-	CR.3.1 TDD	-	CR.3.1 TDD	-
OCNG Patterns		OP.1	OP.1	OP.1	OP.1	OP.1	OP.1
SMTC configuration		SMTC. 1	SMTC. 1	SMTC. 1	SMTC. 1	SMTC. 1	SMTC. 1
SSB configuration		SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2	SSB.3 FR2

PDSCH/PDCCH subcarrier spacing	kHz	120	120	120	120	120	120
EPRE ratio of PSS to SSS	dB	0	0	0	0	0	0
EPRE ratio of PBCH_DMRS to SSS							
EPRE ratio of PBCH to PBCH_DMRS							
EPRE ratio of PDCCH_DMRS to SSS							
EPRE ratio of PDCCH to PDCCH_DMRS							
EPRE ratio of PDSCH_DMRS to SSS							
EPRE ratio of PDSCH to PDSCH_DMRS							
EPRE ratio of OCNG DMRS to SSS ^{Note 1}							
EPRE ratio of OCNG to OCNG DMRS ^{Note 1}							
Propagation conditions		AWGN	AWGN	AWGN	AWGN	AWGN	AWGN
Antenna configuration		1x2	1x2	1x2	1x2	1x2	1x2
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.							

Table A.17.7.4.2.2-3: SS-SINR Inter frequency OTA related test parameters

Parameter	Unit	Test 1		Test 2		Test 3	
		Cell 1	Cell 2	Cell 1	Cell 2	Cell 1	Cell 2
Angle of arrival configuration	degrees	Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1		Setup 1 according to A.3.15.1	
Assumption for UE beams ^{Note 10}		Rough		Rough		Rough	
N_{oc} ^{Note1}	dBm/15kHz ^{Note4}	-105	-105	-105	-105	-105	-105
N_{oc} ^{Note1}	dBm/SCS ^{Note3}	-96	-96	-96	-96	-96	-96
$\hat{E}_s / N_{oc}$	dB	-0.5		-0.5		11.0	
SSB_RP ^{Note2}	dBm/SCS ^{Note4}	-96.5	-96.5	-85	-85	-99	-99
SS-SINR ^{Note2}	dB	-0.5	-0.5	11	11	-3.0	-3.0
$\hat{E}_s / I_{ot}$	dB	-0.5	-0.5	11	11	-3.0	-3.0
I_o ^{Note2}	dBm/95.04 MHz ^{Note4}	-69.3	-69.3	-55.4	-55.4	-65.24	-65.24
Note 1: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 2: SS-SINR, SSB_RP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 3: SS-SINR and SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port. Note 4: Equivalent power received by an antenna with 0 dBi gain at the centre of the quiet zone Note 5: As observed with 0 dBi gain antenna at the centre of the quiet zone Note 10: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation							

A.17.7.4.2.3 Test Requirements

The SS-SINR absolute measurement accuracy in test 1 shall be within the range Nominal SS-SINR +3dB to Nominal SS-SINR -3dB and the SS-SINR measurement accuracy in test 2 shall be within the range Nominal SS-SINR +3.5dB to Nominal SS-SINR -3.5dB according to the requirements in clause 10.1A.13.1.

The SS-SINR relative measurement accuracy shall fulfil the requirements in clause 10.1A.13.1.

A.18 E-UTRA standalone tests for NR RRM for RedCap

A.18.1 RRC_IDLE state mobility

A.18.1.1 Inter-RAT NR Cell re-selection

A.18.1.1.1 E-UTRA Cell reselection to higher priority NR target Cell in FR1

A.18.1.1.1.1 Test Purpose and Environment

This test is to verify the requirement for the E-UTRAN to NR inter-RAT cell reselection requirements for 2Rx RedCap specified in clause 4.2.2.5.8 in TS 36.133 [15].

The test scenario comprises of 1 E-UTRA cell and 1 NR cell as given in tables A.18.1.1.1.1-1, A.18.1.1.1.1-2, A.18.1.1.1.1-3 and A.18.1.1.1.1-4. The test consists of three successive time periods, with time duration of T1, T2, and T3 respectively. E-UTRA cell 1 is already identified by the UE prior to the start of the test. Cell 2 is of higher priority than cell 1.

Table A.18.1.1.1.1-1: Supported test configurations

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
7	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.18.1.1.1.1-2: General test parameters for E-UTRA cell re-selection FR1 NR cell test case

Parameter		Unit	Test configuration	Value	Comment
Initial condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE camps on cell 2 in the initial phase
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
T1 end condition	Active cell			Cell1	During T1 period the UE reselects to cell 1
	Neighbour cell			Cell2	
T3 end condition	Active cell		1, 2, 3, 4, 5, 6, 7, 8	Cell2	The UE shall perform reselection to cell 2 during T3
	Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	Cell1	
RF Channel Number			1, 2, 3, 4, 5, 6, 7, 8	1, 2	E-UTRAN radio channel (1) and NR radio channel (2) are used for this test
Time offset between cells			1, 4, 7, 8	3 ms	Asynchronous cells
			2, 5	3 μ s	Synchronous cells
			3, 6	3 μ s	Synchronous cells
Access Barring Information		-	1, 2, 3, 4, 5, 6, 7, 8	Not Sent	No additional delays in random access procedure.
DRX cycle length		s	1, 2, 3, 4, 5, 6, 7, 8	1.28	The value shall be used for all cells in the test.

NR PRACH configuration index		1, 2, 3, 4, 5, 6, 7, 8	102	The detailed configuration is specified in TS 38.211 clause 6.3.3.2
T1	s	1, 2, 3, 4, 5, 6, 7, 8	15	T1 needs to be defined so that cell re-selection reaction time is taken into account.
T2	s	1, 2, 3, 4, 5, 6, 7, 8	>7	During T2, cell 2 shall be powered off, and during the off time the physical cell identity shall be changed. The intention is to ensure that cell 2 has not been detected by the UE prior to the start of period T3.
T3	s	1, 2, 3, 4, 5, 6, 7, 8	75	T3 needs to be defined so that cell re-selection reaction time is taken into account.

Table A.18.1.1.1.1-3: Cell specific test parameters for NR cell 2

Parameter	Unit	Test configuration	Cell 2		
			T1	T2	T3
TDD configuration		1, 4, 7, 8	N/A		
		2, 5	TDDConf.1.1		
		3, 6	TDDConf.2.1		
PDSCH Reference measurement channel		1, 4, 7, 8	SR.1.1 FDD		
		2, 5	SR.1.1 TDD		
		3, 6	SR.2.1 TDD		
RMSI CORESET Reference Channel		1, 4, 7, 8	CR.1.1 FDD		
		2, 5	CR.1.1 TDD		
		3, 6	CR.2.1 TDD		
RMC CORESET Reference Channel		1, 4, 7, 8	CCR.1.1 FDD		
		2, 5	CCR.1.1 TDD		
		3, 6	CCR.2.1 TDD		
OCNG Patterns		1, 2, 3, 4, 5, 6, 7, 8	OP.1		
SMTC configuration		1, 2, 3, 4, 5, 6, 7, 8	SMTC.1		
SSB configuration		1, 4, 7, 8	SSB.1 FR1		
		2, 5	SSB.1 FR1		
		3, 6	SSB.1 RedCap FR1		
Initial DL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1		
Initial UL BWP configuration		1, 2, 3, 4, 5, 6, 7, 8	ULBWP.0.1		
RLM-RS		1, 2, 3, 4, 5, 6, 7, 8	SSB		
Qrxlevmin	dBm/SCS	1, 2, 4, 5, 7, 8	-140		
		3, 6	-137		
Pcompensation	dB	1, 2, 3, 4, 5, 6, 7, 8	0		
Qhysts	dB	1, 2, 3, 4, 5, 6	0		
Qoffsets,n	dB	1, 2, 3, 4, 5, 6, 7, 8	0		
Cell_selection_and_reselection_quality_measurement		1, 2, 3, 4, 5, 6, 7, 8	SS-RSRP		
$\hat{E}_s / I_{n}$	dB	1, 4, 7, 8	-4	-infinity	12
		2, 5			
		3, 6			
N_{oc} Note2	dBm/SCS	1, 4, 7, 8	-98		
		2, 5	-98		

N_{oc} Note2	dBm/15 kHz	3, 6	-95		
		1, 4, 7, 8	-98		
		2, 5			
		3, 6			
$\hat{E}_s / N_{oc}$	dB	1, 4, 7, 8	-4	-infinity	12
		2, 5			
		3, 6			
SS-RSRP Note3	dBm/SCS	1, 4, 7, 8	-102	-infinity	-86
		2, 5	-102	-infinity	-86
		3, 6	-99	-infinity	-83
Io	dBm/9.36 MHz	1, 4, 7, 8	-68.60	-70.05	-57.78
	dBm/9.36 MHz	2, 5	-68.60	-70.05	-57.78
	dBm/18.36 MHz	3, 6	-65.67	-67.12	-54.86
Treselection	s	1, 2, 3, 4, 5, 6, 7, 8	0	0	0
SnointrasearchP	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
Thresh _{x, highP}	dB	1, 2, 3, 4, 5, 6, 7, 8	48		
Thresh _{serving, lowP}	dB	1, 2, 3, 4, 5, 6, 7, 8	44		
Thresh _{x, lowP}	dB	1, 2, 3, 4, 5, 6, 7, 8	50		
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: SS-RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

Table A.18.1.1.1-4: Cell specific test parameters for E-UTRA cell 1

Parameter	Unit	Cell 1		
		T1	T2	T3
E-UTRA RF Channel number		1		
BW _{channel}	MHz	10		
OCNG Patterns defined in TS 36.133 [15] clause A.3.2		OP.2 FDD for test configuration 1, 2, 3, 7; OP.2 TDD for test configuration 4, 5, 6, 8		
PBCH_RA	dB	0		
PBCH_RB	dB			
PSS_RA	dB			
SSS_RA	dB			
PCFICH_RB	dB			
PHICH_RA	dB			
PHICH_RB	dB			
PDCCH_RA	dB			
PDCCH_RB	dB			
PDSCH_RA	dB			
PDSCH_RB	dB			
OCNG_RA Note 1	dB			
OCNG_RB Note 1	dB			
Qrxlevmin	dBm	-140		
N_{oc} Note 2	dBm/15 kHz	-98		
RSRP Note 3	dBm/15 KHz	-84	-84	-84

$\hat{E}_s/I_{ot}$	dB	14	14	14
$\hat{E}_s/N_{oc}$	dB	14	14	14
TreselectionEUTRAN	S	0		
SnonintrasearchP	dB	50		
Thresh _{x, highP}	dB	48		
Thresh _{serving, lowP}	dB	44		
Thresh _{x, lowP}	dB	50		
Propagation Condition		AWGN		
Note 1:	OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.			
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.			
Note 3:	RSRP levels have been derived from other parameters for information purposes. They are not settable parameters themselves.			

A.18.1.1.1.2 Test Requirements

The cell reselection delay to a higher priority NR cell is defined as the time from the beginning of time period T3, to the moment when the UE camps on cell 2 and starts to send preambles on the PRACH for sending the *RRCSetupRequest* message to perform a registration procedure for mobility and periodic registration update on cell 2.

The cell re-selection delay to a higher priority cell shall be less than 68 s.

The rate of correct cell reselections observed during repeated tests shall be at least 90%.

NOTE: The cell re-selection delay to a higher priority cell can be expressed as: $T_{\text{higher_priority_search}} + T_{\text{evaluate, NR}} + T_{\text{SI-NR}}$, and to a lower priority cell can be expressed as: $T_{\text{evaluate, NR}} + T_{\text{SI-NR}}$.

Where:

$T_{\text{higher_priority_search}}$ See clause 4.2.2 in TS 36.133 [15]

$T_{\text{evaluate, NR}}$ See Table 4.2.2.5.6-1 in clause 4.2.2.5.6 in TS 36.133 [15]

$T_{\text{SI-NR}}$ Maximum repetition period of relevant system info blocks that needs to be received by the UE to camp on a cell; 1280 ms is assumed in this test case.

This gives a total of 67.68 s, allow 68 s for the cell re-selection delay to a higher priority NR cell and 7.68 s for the cell re-selection delay to a lower priority cell in the test case, which we allow 8 s.

A.18.2 RRC_CONNECTED state mobility

A.18.2.1 Handover

A.18.2.1.1 E-UTRAN - NR handover in FR1

A.18.2.1.1.1 Test Purpose and Environment

This test shall verify the E-UTRAN to NR FR1 handover requirements for 2RX RedCap as specified in clause 5.3.4B in TS 36.133 [15].

The test comprises of one E-UTRA carrier and one NR carrier. There are two cells and one cell on each carrier. Cell 1 is the E-UTRAN and Cell 2 is an inter-RAT NR neighbour cell. The test consists of three successive time periods,

with time durations of T1, T2 and T3 respectively. At the start of time duration T1, the UE does not have any timing information of Cell 2. Starting T2, Cell 2 becomes detectable and the UE is expected to detect and send a measurement report. Gap pattern configuration with id #0 as specified in Table 8.1.2.1-1 of TS 36.133 [15] is configured before T2 begins to enable inter-RAT frequency monitoring.

A RRC message implying handover shall be sent to the UE during period T2 after the UE has reported Event B2. The start of T3 is the instant when the last TTI containing the RRC message implying handover is sent to the UE. The handover message shall contain Cell 2 as the target cell.

Supported test configurations are shown in table A.18.2.1.1-1. General test parameters are provided in Table A.18.2.1.1-2. Cell specific test parameters for Cell 1 and Cell 2 are provided in Tables A.18.2.1.1-3 and A.18.2.1.1-4 respectively.

Table A.18.2.1.1-1: Supported test configurations for E-UTRAN inter-RAT NR handover

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
6	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
7	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.18.2.1.1-2: General test parameters for E-UTRAN inter-RAT NR handover

Parameter	Unit	Value	Comment
NR RF Channel Number		1	1 NR carrier frequency is used in the test
LTE RF Channel Number		2	1 E-UTRAN carrier frequency is used in the test
Initial conditions	Active cell	Cell 1	E-UTRAN cell
	Neighbouring cell	Cell 2	NR cell
Final condition	Active cell	Cell 2	
NR measurement quantity		SS-RSRP	
E-UTRAN measurement quantity		RSRP	
b2-Threshold1	dBm	-83	Absolute E-UTRAN RSRP threshold for event B2
b2-Threshold2NR	dBm	As specified in Table A.18.2.1.1-4	Absolute NR SS-RSRP threshold for event B2
Hysteresis	dB	0	
TimeToTrigger	s	0	
Filter coefficient		0	L3 filtering is not used
DRX		OFF	Non-DRX test
Access Barring Information	-	Not sent	No additional delays in random access procedure
Time offset between cells		3 ms	Asynchronous cells
Gap pattern configuration Id		0	As specified in Table 8.1.2.1-1 started before T2 starts [15]
T1	s	5	
T2	s	≤5	
T3	s	1	

Table A.18.2.1.1-3: Cell specific test parameters for E-UTRAN inter-RAT NR handover (Cell 1)

Parameter	Unit	Configuration	Cell 1
-----------	------	---------------	--------

			T1	T2	T3
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	2		
Duplex mode		1, 2, 3, 4	FDD		
		5, 6, 7, 8	TDD		
TDD special subframe configuration ^{Note1}		5, 6, 7, 8	6		
TDD uplink-downlink configuration ^{Note1}		5, 6, 7, 8	1		
BW _{channel}	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100		
PRACH Configuration ^{Note2}		1, 2, 3, 4	4		
		5, 6, 7, 8	53		
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3, 4	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD		
		5, 6, 7, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD		
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3, 4	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD		
		5, 6, 7, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD		
OCNG Patterns ^{Note3}		1, 2, 3, 4	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD		
		5, 6, 7, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD		
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0		
PBCH_RB					
PSS_RA					
SSS_RA					
PCFICH_RB					
PHICH_RA					
PHICH_RB					
PDCCH_RA					
PDCCH_RB					
PDSCH_RA					
PDSCH_RB					
OCNG_RA ^{Note4}					
OCNG_RB ^{Note4}					
N _{oc} ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	7	7	7
$\hat{E}_s/I_{ot}$ ^{Note6}	dB	1, 2, 3, 4, 5, 6, 7, 8	7	7	7
RSRP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-91	-91	-91
SCH_RP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-91	-91	-91
I _o ^{Note6}	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-62.43	-62.43	-62.43

Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN
Antenna Configuration and Correlation Matrix ^{Note7}		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23]. Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23]. Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively. Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols. Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled. Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves. Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].			

Table A.18.2.1.1-4: Cell specific test parameters E-UTRAN inter-RAT NR handover (Cell 2)

Parameter		Unit	Configuration	Cell 2		
				T1	T2	T3
RF channel number			1, 2, 3, 4, 5, 6, 7, 8	1		
Duplex mode			1, 5	FDD		
			2, 3, 6, 7	TDD		
			4,8	HD-FDD		
TDD Configuration			2, 6	TDDConf.1.1		
			3, 7	TDDConf.2.1		
BW _{channel}		MHz	1, 4,5,8	10: N _{RB,c} = 52 (FDD)		
			2, 6	10: N _{RB,c} = 52 (TDD)		
			3, 7	20: N _{RB,c} = 51 (TDD)		
PDSCH reference measurement channel			1, 4,5,8	SR.1.1 FDD		
			2, 6	SR.1.1 TDD		
			3, 7	SR.2.1 TDD		
CORSET reference channel			1, 4,5,8	CR.1.1 FDD		
			2, 6	CR.1.1 TDD		
			3, 7	CR.2.1 TDD		
PRACH configuration			1, 2, 3, 4, 5, 6, 7, 8	FR1 PRACH configuration 1		
OCNG pattern ^{Note1}			1, 2, 3, 4, 5, 6, 7, 8	OP.1		
BWP	Initial DL BWP		1, 2, 3, 4, 5, 6, 7, 8	DLBWP.0.1		
	Dedicated DL BWP			DLBWP.1.1		
	Initial UL BWP			ULBWP.0.1		
	Dedicated UL BWP			ULBWP.1.1		
SMTC configuration			1, 2, 3, 4, 5, 6, 7, 8	SMTC.1 RedCap		
SSB configuration			1,2,4,5,6,8	SSB.4 RedCap FR1		
			3,7	SSB.2 RedCap FR1		
b2-Threshold2NR		dBm	1,2,4,5,6,8	-106		
			3,7	-103		
EPRE ratio of PSS to SSS		dB	1, 2, 3, 4, 5, 6, 7, 8	0		
EPRE ratio of PBCH_DMRS to SSS						
EPRE ratio of PBCH to PBCH_DMRS						

EPRE ratio of PDCCH_DMRS to SSS					
EPRE ratio of PDCCH to PDCCH_DMRS					
EPRE ratio of PDSCH_DMRS to SSS					
EPRE ratio of PDSCH to PDSCH_DMRS					
EPRE ratio of OCNG DMRS to SSS					
EPRE ratio of OCNG to OCNG DMRS					
N_{oc}^{Note2}	dBm/15 KHz	1, 2, 3, 4, 5, 6, 7, 8	-98		
N_{oc}^{Note2}	dBm/SCS	1,2,4,5,6,8	-98		
		3,7	-95		
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-infinity	0	0
$\hat{E}_s/I_{ot}^{Note3}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-infinity	0	0
SS-RSRP ^{Note3}	dBm/SCS	1, 2, 4, 5, 6,8	-infinity	-98	-98
		3, 7	-infinity	-95	-95
I_o^{Note3}	dBm/9.36 MHz	1, 2, 4, 5, 6,8	-70.05	-67.04	-67.04
	dBm/18.36 MHz	3, 7	-67.13	-60.94	-64.12
Propagation condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN		
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2 Low		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: $\hat{E}_s/I_{ot}$, SS-RSRP, and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.18.2.1.1.2 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 112 ms from the beginning of time period T3.

The rate of correct handovers observed during repeated tests shall be at least 90%.

NOTE: The handover delay can be expressed as: RRC procedure delay + $T_{interrupt}$, where:

RRC procedure delay = 50 ms and is specified in TS36.133.

$T_{interrupt}$ = 62 ms in the test; $T_{interrupt}$ is defined in TS36.133 clause 5.3.4.3.

This gives a total of 112 ms.

A.18.2.2 RRC connection release with redirection

A.18.2.2.1 Redirection from E-UTRA to NR FR1 for redcap UE

A.18.2.2.1.1 Test Purpose and Environment

This test is to verify RRC connection release with redirection from E-UTRA to NR requirements for 2Rx RedCap specified in 36.133 clause 6.3.2.6.

A.18.2.2.1.2 Test Parameters

Supported test configurations are shown in table A.18.2.2.1.2-1. The time delay is tested by using the parameters in table A.18.2.2.1.2-2, A.18.2.2.1.2-3, and A.18.2.2.1.2-4.

The test consists of two successive time periods, with time duration of T1, and T2 respectively. The *RRCConnectionRelease* message shall be sent to the UE during period T1 and the start of T2 is the instant when the last TTI containing the RRC message is sent to the UE. Prior to time duration T2, the UE shall not have any timing information of Cell 2. Cell 2 is powered up at the beginning of the T2.

Table A.18.2.2.1.2-1: Redirection from E-UTRAN to NR test configurations

Configuration	Description
1	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE FDD
2	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE FDD
3	NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE FDD
4	NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode, LTE TDD
5	NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode, LTE TDD
6	NR 30kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode, LTE TDD
7	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE FDD
8	NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode, LTE TDD
Note: The UE is only required to be tested in one of the supported test configurations	

Table A.18.2.2.1.2-2: General test parameters for Redirection from E-UTRAN to NR test case

Parameter	Unit	Value	Comment
Initial conditions	Active cell	Cell 1	E-UTRAN cell
	Neighbouring cell	Cell 2	NR cell
Final condition	Active cell	Cell 2	
Filter coefficient		0	L3 filtering is not used
Access Barring Information	-	Not Sent	No additional delays in random access procedure.
Time offset between cells		3 μ s	Synchronous cells
T1	s	5	
T2	s	2.3	

Table A.18.2.2.1.2-3: Cell specific test parameters for Redirection from E-UTRAN to NR test case (cell 1)

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6,7,8	2	
Duplex mode		1, 2, 3,7	FDD	
		4, 5, 6,8	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6,8	6	

TDD uplink-downlink configuration ^{Note1}		4, 5, 6,8	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6,7,8	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PRACH Configuration ^{Note2}		1, 2, 3,7	4	
		4, 5, 6,8	53	
PDSCH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3,7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6,8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note3}		1, 2, 3,7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6,8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note3}		1, 2, 3,7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6,8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
PBCH_RA	dB	1, 2, 3, 4, 5, 6,7,8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note4}				
OCNG_RB ^{Note4}				
N _{oc} ^{Note5}				
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6,7,8	4	4
$\hat{E}_s/I_{ot}$ ^{Note6}	dB	1, 2, 3, 4, 5, 6,7,8	4	4
RSRP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6,7,8	-94	-94
SCH_RP ^{Note6}	dBm/15kHz	1, 2, 3, 4, 5, 6,7,8	-94	-94
I ₀ ^{Note6}	dBm/9MHz	1, 2, 3, 4, 5, 6,7,8	-64.76	-64.76
Propagation Condition		1, 2, 3, 4, 5, 6,7,8	AWGN	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: PRACH configurations are specified in table 5.7.1-2 and table 5.7.1-3 in TS 36.211 [23].				
Note 3: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				

- Note 4: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
- Note 5: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
- Note 6: $\hat{E}_s/I_{ot}$, RSRP, SCH_RP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
- Note 7: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].

Table A.18.2.2.1.2-4: Cell specific test parameters for Redirection from E-UTRAN to NR test case (cell 2)

Parameter		Unit	Cell 2	
			T1	T2
RF Channel Number			1	
Duplex mode	Config 1,4		FDD	
	Config 2,3,5,6		TDD	
	Config 7,8		HD-FDD	
SSB Configuration	Config 1,2,4,5,7,8		SSB.1 FR1	
	Config 3,6		SSB.1 RedCap FR1	
TDD configuration	Config 1,4,7,8		Not Applicable	
	Config 2,5		TDDConf.1.1	
	Config 3,6		TDDConf.2.1	
BW _{channel}	Config 1,4,7,8	MHz	10: N _{RB,c} = 52	
	Config 2,5		10: N _{RB,c} = 52	
	Config 3,6		20: N _{RB,c} = 51	
BWP BW	Config 1,4,7,8	MHz	10: N _{RB,c} = 52	
	Config 2,5		10: N _{RB,c} = 52	
	Config 3,6		20: N _{RB,c} = 51	
DRX Cycle		ms	Not Applicable	
PDSCH Reference measurement channel	Config 1,4,7,8		SR.1.1 FDD	
	Config 2,5		SR.1.1 TDD	
	Config 3,6		SR.2.1 TDD	
CORESET Reference Channel	Config 1,4,7,8		CR.1.1 FDD	
	Config 2,5		CR.1.1 TDD	
	Config 3,6		CR.2.1 TDD	
OCNG Patterns			OCNG pattern 1	
SMTC configuration	Config 1,2,4,5,7,8		SMTC.1 RedCap FR1	
	Config 3,6		SMTC.1 RedCap FR1	
PDSCH/PDCCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6		30 kHz	
PUCCH/PUSCH subcarrier spacing	Config 1,2,4,5,7,8	kHz	15 kHz	
	Config 3,6		30 kHz	
PRACH configuration			FR1 PRACH configuration 1	
BWP configuration	Initial DL BWP		DLBWP.0.1	
	Dedicated DL BWP		DLBWP.1.1	
	Initial UL BWP		ULBWP.0.1	
	Dedicated UL BWP		ULBWP.1.1	
EPRE ratio of PSS to SSS		dB	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				

EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS(Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N_{oc} ^{Note2}		dBm/15kHz	-98		
N_{oc} ^{Note2}	Config 1,2,4,5,7,8	dBm/SCS	-98		
	Config 3,6		-95		
$\hat{E}_s/I_{ot}$		dB	-infinity	4	
$\hat{E}_s/N_{oc}$		dB	-infinity	4	
I_o ^{Note3}	Config 1,2,4,5,7,8	dBm/ 9.36MHz	-70.05	-64.59	
	Config 3,6	dBm/ 18.36MHz	-67.12	-61.67	
Propagation condition		-	AWGN		
Note 1: OCNG shall be used such that both cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.					
Note 3: I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.					

A.18.2.2.1.3 Test Requirements

The UE shall start to transmit the PRACH to Cell 2 less than 2240 ms from the beginning of time period T2.
The rate of correct RRC connection release redirection to NR observed during repeated tests shall be at least 90%.

NOTE: The redirection delay can be expressed as:

$$T_{\text{connection_release_redirect_NR_RedCap}} = T_{\text{RRC_procedure_delay}} + T_{\text{identify-NR_Redcap}} + T_{\text{SI-NR_RedCap}} + T_{\text{RACH_RedCap}},$$

where:

$T_{\text{RRC_procedure_delay}} = 110$ ms in the test.

$T_{\text{identify-NR_Redcap}} = 680$ ms.

$T_{\text{SI-NR_RedCap}} = 1280$ ms, it is the time required for receiving all the relevant system information as defined in TS 38.331 for the target NR cell.

$T_{\text{RACH_RedCap}} = 170$ ms in the test.

This gives a total of 2240 ms.

A.18.3 Measurement procedure

A.18.3.1 E-UTRA – NR Inter-RAT Measurements

A.18.3.1.1 NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is not used

A.18.3.1.1.1 Test Purpose and Environment

The purpose of this test is to verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements for 2Rx RedCap specified in clause 8.20.2.2 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.20.2.3 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.18.3.1.1.1-1, A.18.3.1.1.1-2, A.18.3.1.1.1-3 and A.18.3.1.1.1-4.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.18.3.1.1.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
7	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode

Note 1: The UE is only required to be tested in one of the supported test configurations.

Table A.18.3.1.1.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1	One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1	One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6, 7, 8	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6, 7, 8	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6, 7, 8	39	As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6, 7, 8	Note 1	E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]

b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6, 7, 8	Note 2	SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
CP length		1, 2, 3, 4, 5, 6, 7, 8	Normal	
TimeToTrigger	s	1, 2, 3, 4, 5, 6, 7, 8	0	
Filter coefficient		1, 2, 3, 4, 5, 6, 7, 8	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6, 7, 8	OFF	DRX is not used
Time offset between serving and neighbour cells		1, 4, 7, 8	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs	Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6, 7, 8	5	
T2	s	1, 2, 3, 4, 5, 6, 7, 8	1	
Note 1: The value of b2-Threshold1 is defined in Table A.18.3.1.1.1-3				
Note 2: The value of b2-Threshold2NR is defined in Table A.18.3.1.1.1-4				

Table A.18.3.1.1.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6, 8	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6, 8	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6, 7, 8	-77	

PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
Ê _s /N _{oc}	dB	1, 2, 3, 4, 5, 6, 7, 8	17	17
Ê _s /I _{ot} ^{Note5}	dB	1, 2, 3, 4, 5, 6, 7, 8	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-87	-87
I _o ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-59.13+10log (N _{RB,c} /50)	-59.13+10log (N _{RB,c} /50)
Propagation Condition ^{Note6}		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2, 3, 4, 5, 6, 7, 8	1x2	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5: Ê _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

Table A.18.3.1.1.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
		7, 8	HD-FDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
BW _{channel}	MHz	1, 2, 4, 5, 7, 8	10: $N_{RB,c} = 52$	
		3, 6	20: $N_{RB,c} = 51$	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6, 7, 8	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4, 7, 8	SMTC.2	
		2, 3, 5, 6	SMTC.1	

PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5, 7, 8	15	
		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5, 7, 8	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Note2	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
Note2	dBm/SCS	1, 2, 4, 5, 7, 8	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5, 7, 8	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
I ₀ Note3	dBm/9.36MHz	1, 2, 4, 5, 7, 8	-70.05	-62.26
	dBm/18.36MHz	3, 6	-67.13	-59.34
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{sc}^{RB} to be fulfilled.				
Note 3: SS-RSRP and I ₀ levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

A.18.3.1.1.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 920 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.18.3.1.2 NR Inter-RAT event triggered reporting tests for FR1 without SSB time index detection when DRX is used

A.18.3.1.2.1 Test Purpose and Environment

The purpose of this test is to verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements for 2Rx RedCap specified in clause 8.20.2.2 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.20.2.3 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.18.3.1.2.1-1, A.18.3.1.2.1-2, A.18.3.1.2.1-3 and A.18.3.1.2.1-4.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.18.3.1.2.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
7	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.18.3.1.2.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1		One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1		One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6, 7, 8	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6, 7, 8	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6, 7, 8	39		As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6, 7, 8	Note 1		E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6, 7, 8	Note 2		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]

Hysteresis	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
CP length		1, 2, 3, 4, 5, 6, 7, 8	Normal	
TimeToTrigger	s	1, 2, 3, 4, 5, 6, 7, 8	0	
Filter coefficient		1, 2, 3, 4, 5, 6, 7, 8	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6, 7, 8	DRX.9	DRX.12
Time offset between serving and neighbour cells		1, 4, 7, 8	3ms	As specified in clause A.3.3
		2, 3, 5, 6	3μs	Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6, 7, 8	5	
T2	s	1, 2, 3, 4, 5, 6, 7, 8	2	11
Note 1: The value of b2-Threshold1 is defined in Table A.18.3.1.2.1-3				
Note 2: The value of b2-Threshold2NR is defined in Table A.18.3.1.2.1-4				

Table A.18.3.1.2.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6, 8	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6, 8	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6, 7, 8	-77	
PBCH_RA	dB		0	

PBCH_RB		1, 2, 3, 4, 5, 6, 7, 8		
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
Ê _s /N _{oc}	dB	1, 2, 3, 4, 5, 6, 7, 8	17	17
Ê _s /I _{ot} ^{Note5}	dB	1, 2, 3, 4, 5, 6, 7, 8	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-87	-87
I _o ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-59.13+10log (N _{RB,c} /50)	-59.13+10log (N _{RB,c} /50)
Propagation Condition ^{Note6}		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2, 3, 4, 5, 6, 7, 8	1x2	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5: Ê _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

Table A.18.3.1.2.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
		7, 8	HD-FDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5, 7, 8	10: $N_{RB,c} = 52$	
		3, 6	20: $N_{RB,c} = 51$	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6, 7, 8	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4, 7, 8	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5	15	

		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5, 7, 8	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Note2 N_{ref}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
Note2 N_{ref}	dBm/SCS	1, 2, 4, 5, 7, 8	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5, 7, 8	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{\alpha}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
I_0 Note3	dBm/9.36MHz	1, 2, 4, 5, 7, 8	-70.05	-62.26
	dBm/18.36MHz	3, 6	-67.13	-59.34
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ref} to be fulfilled.				
Note 3: SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

A.18.3.1.2.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1080 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 10240 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1 and 2, the UE is not required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.18.3.1.3 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is not used

A.18.3.1.3.1 Test Purpose and Environment

The purpose of this test is to verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.20.2.2 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.20.2.3 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.18.3.1.3.1-1, A.18.3.1.3.1-2, A.18.3.1.3.1-3 and A.18.3.1.3.1-4.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.18.3.1.3.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
7	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.18.3.1.3.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value	Comment
			Test 1	
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1	One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1	One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6, 7, 8	E-UTRA cell 1 (PCell)	E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	NR cell 2	NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6, 7, 8	0	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6, 7, 8	39	As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6, 7, 8	Note 1	E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6, 7, 8	Note 2	SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]

Hysteresis	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
CP length		1, 2, 3, 4, 5, 6, 7, 8	Normal	
TimeToTrigger	s	1, 2, 3, 4, 5, 6, 7, 8	0	
Filter coefficient		1, 2, 3, 4, 5, 6, 7, 8	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6, 7, 8	OFF	DRX is not used
Time offset between serving and neighbour cells		1, 4, 7, 8	3ms	Asynchronous cells. The timing of Cell 2 is 3 ms later than the timing of Cell 1.
		2, 3, 5, 6	3μs	Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6, 7, 8	5	
T2	s	1, 2, 3, 4, 5, 6, 7, 8	2	
Note 1: The value of b2-Threshold1 is defined in Table A.18.3.1.3.1-3				
Note 2: The value of b2-Threshold2NR is defined in Table A.18.3.1.3.1-4				

Table A.18.3.1.3.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6, 8	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6, 8	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: N _{RB,C} = 25 10 MHz: N _{RB,C} = 50 20 MHz: N _{RB,C} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6, 7, 8	-77	
PBCH_RA	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
PBCH_RB				

PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
Ê _s /N _{oc}	dB	1, 2, 3, 4, 5, 6, 7, 8	17	17
Ê _s /I _{ot} ^{Note5}	dB	1, 2, 3, 4, 5, 6, 7, 8	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-87	-87
I _o ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-59.13+10log (N _{RB,C} /50)	-59.13+10log (N _{RB,C} /50)
Propagation Condition ^{Note6}		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2, 3, 4, 5, 6, 7, 8	1x2	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5: Ê _s /I _{ot} , RSRP, SCH_RP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

Table A.18.3.1.3.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
		7, 8		
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
BW _{channel}	MHz	1, 2, 4, 5, 7, 8	10: $N_{RB,c} = 52$	
		3, 6	20: $N_{RB,c} = 51$	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6, 7, 8	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4, 7, 8	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5, 7, 8	15	
		3, 6	30	

b2-Threshold2NR	dBm/SCS	1, 2, 4, 5, 7, 8	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Note2 N_{sc}^{DL}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
Note2 N_{sc}^{DL}	dBm/SCS	1, 2, 4, 5, 7, 8	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5, 7, 8	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{ot}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
I_0 Note3	dBm/9.36MHz	1, 2, 4, 5, 7, 8	-70.05	-62.26
	dBm/18.36MHz	3, 6	-67.13	-59.34
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{sc}^{DL} to be fulfilled.				
Note 3: SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

A.18.3.1.3.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1040 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.18.3.1.4 NR Inter-RAT event triggered reporting tests for FR1 with SSB time index detection when DRX is used

A.18.3.1.4.1 Test Purpose and Environment

The purpose of this test is to verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements for 2Rx RedCap specified in clause 8.20.2.2 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.20.2.3 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR1 on NR RF channel 1. The test parameters are given in Tables A.18.3.1.4.1-1, A.18.3.1.4.1-2, A.18.3.1.4.1-3 and A.18.3.1.4.1-4.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B2 (PCell becomes worse than threshold1 and inter RAT neighbour becomes better than threshold2) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.18.3.1.4.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR1

Configuration	Description
1	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
2	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
3	LTE FDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
4	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, FDD duplex mode
5	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, TDD duplex mode
6	LTE TDD, NR 30 kHz SSB SCS, 20 MHz bandwidth, TDD duplex mode
7	LTE FDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
8	LTE TDD, NR 15 kHz SSB SCS, 10 MHz bandwidth, HD-FDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.18.3.1.4.1-2: General test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1		One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1		One FR1 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6, 7, 8	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1.
Neighbour cell		1, 2, 3, 4, 5, 6, 7, 8	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6, 7, 8	0		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6, 7, 8	39		As specified in TS 36.331 [16].
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6, 7, 8	Note 1		E-UTRA RSRP threshold for E-UTRA RSRP measurement on cell 1 for event B2 [16]
b2-Threshold2NR	dBm	1, 2, 3, 4, 5, 6, 7, 8	Note 2		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B2 [16]

Hysteresis	dB	1, 2, 3, 4, 5, 6, 7, 8	0	
CP length		1, 2, 3, 4, 5, 6, 7, 8	Normal	
TimeToTrigger	s	1, 2, 3, 4, 5, 6, 7, 8	0	
Filter coefficient		1, 2, 3, 4, 5, 6, 7, 8	0	L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6, 7, 8	DRX.9	DRX.12
Time offset between serving and neighbour cells		1, 4, 7, 8	3ms	As specified in clause A.3.3
		2, 3, 5, 6	3μs	Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6, 7, 8	5	
T2	s	1, 2, 3, 4, 5, 6, 7, 8	2	13
Note 1: The value of b2-Threshold1 is defined in Table A.18.3.1.4.1-3				
Note 2: The value of b2-Threshold2NR is defined in Table A.18.3.1.4.1-4				

Table A.18.3.1.4.1-3: E-UTRAN PCell specific test parameters for NR inter-RAT event triggered reporting in non-DRX with NR neighbour cell in FR1 without SSB time index detection

Parameter	Unit	Configuration	Cell 1	
			T1	T2
RF channel number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 2, 3, 7	FDD	
		4, 5, 6, 8	TDD	
TDD special subframe configuration ^{Note1}		4, 5, 6, 8	6	
TDD uplink-downlink configuration ^{Note1}		4, 5, 6, 8	1	
BW _{channel}	MHz	1, 2, 3, 4, 5, 6, 7, 8	5 MHz: N _{RB,c} = 25 10 MHz: N _{RB,c} = 50 20 MHz: N _{RB,c} = 100	
PDSCH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3, 7	5 MHz: R.7 FDD 10 MHz: R.3 FDD 20 MHz: R.6 FDD	
		4, 5, 6, 8	5 MHz: R.4 TDD 10 MHz: R.0 TDD 20 MHz: R.3 TDD	
PCFICH/PDCCH/PHICH parameters: DL Reference Measurement Channel ^{Note2}		1, 2, 3, 7	5 MHz: R.11 FDD 10 MHz: R.6 FDD 20 MHz: R.10 FDD	
		4, 5, 6, 8	5 MHz: R.11 TDD 10 MHz: R.6 TDD 20 MHz: R.10 TDD	
OCNG Patterns ^{Note2}		1, 2, 3, 7	5 MHz: OP.20 FDD 10 MHz: OP.10 FDD 20 MHz: OP.17 FDD	
		4, 5, 6, 8	5 MHz: OP.9 TDD 10 MHz: OP.1 TDD 20 MHz: OP.7 TDD	
b2-Threshold1	dBm	1, 2, 3, 4, 5, 6, 7, 8	-77	
PBCH_RA	dB		0	

PBCH_RB		1, 2, 3, 4, 5, 6, 7, 8		
PSS_RA				
SSS_RA				
PCFICH_RB				
PHICH_RA				
PHICH_RB				
PDCCH_RA				
PDCCH_RB				
PDSCH_RA				
PDSCH_RB				
OCNG_RA ^{Note3}				
OCNG_RB ^{Note3}				
N _{oc} ^{Note4}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-104	
Ê _s /N _{oc}	dB	1, 2, 3, 4, 5, 6, 7, 8	17	17
Ê _s /I _{ot} ^{Note5}	dB	1, 2, 3, 4, 5, 6, 7, 8	17	17
RSRP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-87	-87
SCH_RP ^{Note5}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-87	-87
I _O ^{Note5}	dBm/9MHz	1, 2, 3, 4, 5, 6, 7, 8	-59.13+10log (N _{RB,c} /50)	-59.13+10log (N _{RB,c} /50)
Propagation Condition ^{Note6}		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix ^{Note6}		1, 2, 3, 4, 5, 6, 7, 8	1x2	
Note 1: Special subframe and uplink-downlink configurations are specified in table 4.2-1 in TS 36.211 [23].				
Note 2: DL RMCs and OCNG patterns are specified in clauses A 3.1 and A 3.2 of TS 36.133 [15] respectively.				
Note 3: OCNG shall be used such that all cells are fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 4: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 5: Ê _s /I _{ot} , RSRP, SCH_RP and I _O levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 6: Propagation condition and correlation matrix are defined in clause B.2 in TS 36.101 [25].				

Table A.18.3.1.4.1-4: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR1 without SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
NR RF Channel Number		1, 2, 3, 4, 5, 6, 7, 8	1	
Duplex mode		1, 4	FDD	
		2, 3, 5, 6	TDD	
		7, 8	HD-FDD	
TDD configuration		2, 5	TDDConf.1.1	
		3, 6	TDDConf.2.1	
$BW_{channel}$	MHz	1, 2, 4, 5, 7, 8	10: $N_{RB,c} = 52$	
		3, 6	20: $N_{RB,c} = 51$	
OCNG Patterns defined in A.3.2.1.1 (OP.1)		1, 2, 3, 4, 5, 6, 7, 8	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1, 4, 7, 8	SMTC.2	
		2, 3, 5, 6	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2, 4, 5, 7, 8	15	

		3, 6	30	
b2-Threshold2NR	dBm/SCS	1, 2, 4, 5, 7, 8	-101	
		3, 6	-98	
EPRE ratio of PSS to SSS		1, 2, 3, 4, 5, 6, 7, 8	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
Note2 N_{ref}	dBm/15kHz	1, 2, 3, 4, 5, 6, 7, 8	-98	
Note2 N_{ref}	dBm/SCS	1, 2, 4, 5, 7, 8	-98	
		3, 6	-95	
SS-RSRP Note 3	dBm/SCS	1, 2, 4, 5, 7, 8	-Infinity	-91
		3, 6	-Infinity	-88
$\hat{E}_s/I_{off}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
$\hat{E}_s/N_{oc}$	dB	1, 2, 3, 4, 5, 6, 7, 8	-Infinity	7
I ₀ Note3	dBm/9.36MHz	1, 2, 4, 5, 7, 8	-70.05	-62.26
	dBm/18.36MHz	3, 6	-67.13	-59.34
Propagation Condition		1, 2, 3, 4, 5, 6, 7, 8	AWGN	
Antenna Configuration and Correlation Matrix		1, 2, 3, 4, 5, 6, 7, 8	1x2	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{ref} to be fulfilled.				
Note 3: SS-RSRP and I ₀ levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				

A.18.3.1.4.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 1280 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B2 triggered measurement report, with a measurement reporting delay less than 12160 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1 and 2, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times \text{TTI}_{\text{DCCH}}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.18.3.1.5 NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is not used

A.18.3.1.5.1 Test Purpose and Environment

The purpose of this test is to verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.20.2.2 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.20.2.3 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.18.3.1.5.1-1, A.18.3.1.5.1-2 and A.18.3.1.5.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.18.3.1.5.1-2 is provided for RedCap UE that does not support per-FR gap and in test 2 no measurement gap pattern configuration is provided for RedCap UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have timing information of NR cell 2.

Table A.18.3.1.5.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR2 in non-DRX

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.18.3.1.5.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Number		1, 2	1		One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1		One FR2 NR carrier frequency is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0	N/A	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39	N/A	As specified in TS 36.331 [16].
b1-ThresholdNR	dBm	1, 2	Note 1		SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]
Hysteresis	dB	1, 2	0		
CP length		1, 2	Normal		
TimeToTrigger	s	1, 2	0		
Filter coefficient		1, 2	0		L3 filtering is not used
DRX		1, 2	OFF		DRX is not used

Time offset between serving and neighbour cells		1	3ms		Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs		Synchronous cells.
T1	s	1, 2	10		
T2	s	1, 2	6	3	
Note 1: The value of b1-ThresholdNR is defined in Table A.18.3.1.5.1-3					

Table A.18.3.1.5.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

Parameter		Unit	Test configuration	Cell 2	
				T1	T2
AoA setup defined in A.3.15.2.1			1, 2	Setup 2a	
Assumption for UE beams ^{Note 5}			1, 2	Rough	
NR RF Channel Number			1, 2	1	
Duplex mode			1, 2	TDD	
TDD configuration			1, 2	TDDConf.3.1	
BW _{channel}		MHz	1, 2	100: N _{RB,c} = 24	
OCNG patterns defined in A.3.2.1.1			1, 2	OP. 3	
SMTC configuration defined in A.3.11.1 and A.3.11.2			1	SMTC.2	
			2	SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	1, 2	120	
b1-ThresholdNR	UE power class 3	dBm/SCS	1, 2	-112	
EPRE ratio of PSS to SSS			1, 2	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
$N_{oc} \hat{E}_s$		dBm/SCS	1, 2	- Infinity	-80.6
SS B _{RP} ^{Note 3}		dBm/SCS	1, 2	-Infinity	-80.6
$\hat{E}_s/I_{\alpha BB}$ ^{Note 6}		dB	1, 2	-Infinity	8.3
I ₀ ^{Note3}		dBm/95.04MHZ	1, 2	-Infinity	-56.0
Propagation Condition			1, 2	No external noise (Note 7)	
Note 1: OCNG shall be used such that a constant total transmitted power spectral density is achieved for all OFDM symbols.					
Note 2: Void					
Note 3: SS B _{RP} and I ₀ levels have been derived from other parameters for information purposes. They are not settlable parameters themselves.					
Note 4: Void					
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation					
Note 6: Calculation of Es/Iot _{BB} includes the effect of UE internal noise up to the value assumed for the associated Refsens requirement in clause 7.3.2 of TS 38.101-2 [19], and an allowance of 1dB for UE multi-band relaxation factor ΔMB _P from TS 38.101-2 [19] Table 6.2.1.3-4.					
Note 7: The downlink connection between the System Simulator and the UE is without Additive White Gaussian Noise, and has no fading or multipath effects as specified in TS 38.521-2 B.0 [38].					

A.18.3.1.5.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is not required to report SSB time index.

Table A.18.3.1.5.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in non-DRX

Test case	Measurement reporting delay (ms)	
	Test 1: D1 ms	Test 2: D2 ms
UE power class 3	3200	1600

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.18.3.1.6 NR Inter-RAT event triggered reporting tests for FR2 without SSB time index detection when DRX is used

A.18.3.1.6.1 Test Purpose and Environment

The purpose of this test is to verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.20.2.2 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.20.2.3 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.18.3.1.6.1-1, A.18.3.1.6.1-2 and A.18.3.1.6.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.18.3.1.6.1-2 is provided for RedCap UE that does not support per-FR gap and in tests 3 and 4, no measurement gap pattern configuration is provided for RedCap UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have timing information of NR cell 2.

Table A.18.3.1.6.1-1: NR inter-RAT event triggered reporting tests without SSB index reading for FR2 in DRX

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.18.3.1.6.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

Parameter	Unit	Test configuration	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		1, 2	1				One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1				One FR2 NR carrier frequency is used.
Active cell		1, 2, 3, 4, 5, 6	E-UTRA cell 1 (PCell)				E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2, 3, 4, 5, 6	NR cell 2				NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2, 3, 4, 5, 6	0		N/A		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2, 3, 4, 5, 6	39		N/A		As specified in TS 36.331 [16].
b1-ThresholdNR	dBm	1, 2	Note 1				SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]
Hysteresis	dB	1, 2, 3, 4, 5, 6	0				
CP length		1, 2, 3, 4, 5, 6	Normal				
TimeToTrigger	s	1, 2, 3, 4, 5, 6	0				
Filter coefficient		1, 2, 3, 4, 5, 6	0				L3 filtering is not used
DRX		1, 2, 3, 4, 5, 6	DRX.9	DRX.12	DRX.9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs				Synchronous cells.
T1	s	1, 2, 3, 4, 5, 6	5				
T2	s	1, 2, 3, 4, 5, 6	6	83	6	83	
Note 1: The value of b1-ThresholdNR is defined in Table A.18.3.1. 6.1-3							

Table A.18.3.1.6.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

Parameter		Unit	Test configuration	Cell 2	
				T1	T2
AoA setup defined in A.3.15.1			1, 2	Setup 1	
Assumption for UE beams ^{Note 5}			1, 2	Rough	
NR RF Channel Number			1, 2	1	
Duplex mode			1, 2	TDD	
TDD configuration			1, 2	TDDConf.3.1	
BW _{channel}		MHz	1, 2	100: N _{RB,C} = 66	
OCNG patterns defined in A.3.2.1.1 (OP.1)			1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2			1	SMTC.2	
			2	SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	1, 2	120	
b1-ThresholdNR	UE power class 3	dBm/SCS	1, 2	-106	
EPRE ratio of PSS to SSS			1, 2	0	
EPRE ratio of PBCH DMRS to SSS					

EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
N_{oc} ^{Note2}	dBm/15kHz	1, 2	-104.7	
N_{oc} ^{Note2}	dBm/SCS	1, 2	-95.7	
SS-RSRP ^{Note 3}	dBm/SCS	1, 2	-Infinity	-87.7
$\hat{E}_s/I_{ot}$	dB	1, 2	-Infinity	8
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	8
I_0 ^{Note3}	dBm/95.04MHz z	1, 2	-66.7	-58. 0
Propagation Condition		1, 2	AWGN	
Note 1: OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2: Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.				
Note 3: SS-RSRP and I_0 levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4: SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5: Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.18.3.1.6.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D3 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D4 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is not required to report SSB time index.

Table A.18.3.1.6.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 without SSB time index detection in DRX

Test case	Measurement reporting delay (ms)
-----------	----------------------------------

	Test 1: D1 ms	Test 2: D2 ms	Test 3: D3 ms	Test 4: D4 ms
UE power class 3	4800	51200	4800	51200

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

A.18.3.1.7 NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is not used

A.18.3.1.7.1 Test Purpose and Environment

The purpose of this test is to verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.20.2.2 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.20.2.3 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.18.3.1.7.1-1, A.18.3.1.7.1-2 and A.18.3.1.7.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

In test 1 measurement gap pattern configuration # 0 as defined in Table A.18.3.1.7.1-2 is provided for RedCap UE that does not support per-FR gap and in test 2 no measurement gap pattern configuration is provided for RedCap UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.18.3.1.7.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR2 in non-DRX

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.18.3.1.7.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Value		Comment
			Test 1	Test 2	
E-UTRA RF Channel Numbers		1, 2	1		One E-UTRA carrier frequency is used.
NR RF Channel Numbers		1, 2	1		One FR2 NR carrier frequency is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)		E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2	NR cell 2		NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0	N/A	As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39	N/A	As specified in TS 36.331 [16].

b1-ThresholdNR	dBm	1, 2	Note 1	SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]
Hysteresis	dB	1, 2	0	
CP length		1, 2	Normal	
TimeToTrigger	s	1, 2	0	
Filter coefficient		1, 2	0	L3 filtering is not used
DRX		1, 2	OFF	DRX is not used
Time offset between serving and neighbour cells		1	3ms	Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs	Synchronous cells.
T1	s	1, 2	5	
T2	s	1, 2	5	3
Note 1: The value of b1-ThresholdNR is defined in Table A.18.3.1. 7.1-3				

Table A.18.3.1.7.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
AoA setup defined in A.3.15.1		1, 2	Setup 1	
Assumption for UE beams ^{Note 5}		1, 2	Rough	
NR RF Channel Number		1, 2	1	
Duplex mode		1, 2	TDD	
TDD configuration		1, 2	TDDConf.3.1	
BW _{channel}	MHz	1, 2	100: N _{RB,c} = 66	
OCNG patterns defined in A.3.2.1.1		1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2		1	SMTC.2	
		2	SMTC.1	
PDSCH/PDCCH subcarrier spacing	kHz	1, 2	120	
b1-ThresholdNR UE power class 3	dBm/SCS	1, 2	-106	
EPRE ratio of PSS to SSS		1, 2	0	
EPRE ratio of PBCH DMRS to SSS				
EPRE ratio of PBCH to PBCH DMRS				
EPRE ratio of PDCCH DMRS to SSS				
EPRE ratio of PDCCH to PDCCH DMRS				
EPRE ratio of PDSCH DMRS to SSS				
EPRE ratio of PDSCH to PDSCH				
EPRE ratio of OCNG DMRS to SSS (Note 1)				
EPRE ratio of OCNG to OCNG DMRS (Note 1)				
^{Note2} N_{oc}	dBm/15kHz	1, 2	-104.7	
^{Note2} N_{oc}	dBm/SCS	1, 2	-95.7	
SS-RSRP ^{Note 3}	dBm/SCS	1, 2	-Infinity	-87.7
$\hat{E}_s/I_{ot}$	dB	1, 2	-Infinity	8
$\hat{E}_s/N_{oc}$	dB	1, 2	-Infinity	8
I_o ^{Note3}	dBm/95.04MHz	1, 2	-66.7	-58.0
Propagation Condition		1, 2	AWGN	

Note 1:	OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N_{oc} to be fulfilled.
Note 3:	SS-RSRP and I_o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation

A.18.3.1.7.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-FR gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 1 and test 2, the UE is required to report SSB time index.

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

Table A.18.3.1.7.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in non-DRX

Test case	Measurement reporting delay (ms)	
	Test 1: D1 ms	Test 2: D2 ms
UE power class 3	4160	2080

A.18.3.1.8 NR Inter-RAT event triggered reporting tests for FR2 with SSB time index detection when DRX is used

A.18.3.1.8.1 Test Purpose and Environment

The purpose of this test is to verify that the RedCap UE makes correct reporting of an event. This test will partly verify the NR inter-RAT cell search requirements in clause 8.20.2.2 of TS 36.133 [15] for E-UTRAN FDD-NR measurements and clause 8.20.2.3 of TS 36.133 [15] for E-UTRAN TDD-NR measurements.

In this test, there are two cells: E-UTRA cell 1 as PCell on E-UTRA RF channel 1 and NR cell 2 as neighbour cell in FR2 on NR RF channel 1. The test parameters are given in Tables A.18.3.1.8.1-1, A.18.3.1.8.1-2 and A.18.3.1.8.1-3.

The cell specific test parameters for E-UTRA cell1 as PCell are defined in clause A.3.7.2.2.

In tests 1 and 2, measurement gap pattern configuration # 0 as defined in Table A.18.3.1.8.1-2 is provided for RedCap UE that does not support per-FR gap and in tests 3 and 4, no measurement gap pattern configuration #4 is provided for RedCap UE that supports per-FR gap.

In the measurement control information, it is indicated to the UE that event-triggered reporting with Event B1 (Inter RAT neighbour becomes better than threshold) [16] is used. In the measurement configuration the UE shall be indicated to report the SSB index of the identified NR cell. The test consists of two successive time periods, with

time duration of T1, and T2 respectively. During time duration T1, the UE shall not have any timing information of NR cell 2.

Table A.18.3.1.8.1-1: NR inter-RAT event triggered reporting tests with SSB index reading for FR2 in DRX

Configuration	Description
1	LTE FDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
2	LTE TDD, NR 120 kHz SSB SCS, 100 MHz bandwidth, TDD duplex mode
Note 1: The UE is only required to be tested in one of the supported test configurations.	

Table A.18.3.1.8.1-2: General test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in DRX

Parameter	Unit	Test configuration n	Value				Comment
			Test 1	Test 2	Test 3	Test 4	
E-UTRA RF Channel Number		1, 2	1				One E-UTRA carrier frequency is used.
NR RF Channel Number		1, 2	1				One FR2 NR carrier frequency is used.
Active cell		1, 2	E-UTRA cell 1 (PCell)				E-UTRA cell 1 is on E-UTRA RF channel number 1 as defined in clause A.3.7.2.2.
Neighbour cell		1, 2	NR cell 2				NR cell 2 is on NR RF channel number 1.
Gap Pattern Id		1, 2	0		N/A		As specified in clause Table 8.1.2.1-1 of TS 36.133 [15].
Measurement gap offset		1, 2	39		N/A		As specified in TS 36.331 [16].
b1-ThresholdNR	dBm	1, 2	Note 1				SS-RSRP threshold for SS-RSRP measurement on cell 2 for event B1 [16]
Hysteresis	dB	1, 2	0				
CP length		1, 2	Normal				
TimeToTrigger	s	1, 2	0				
Filter coefficient		1, 2	0				L3 filtering is not used
DRX			DRX. 9	DRX.12	DRX. 9	DRX.12	As specified in clause A.3.3
Time offset between serving and neighbour cells		1	3ms				Asynchronous cells. The timing of Cell 2 is 3ms later than the timing of Cell 1.
		2	3μs				Synchronous cells.
T1	s	1, 2	5				
T2	s	1, 2	7	70	7	70	
Note 1: The value of b1-ThresholdNR is defined in Table A.18.3.1. 8.1-3							

Table A.18.3.1.8.1-3: NR neighbour cell specific test parameters for NR inter-RAT event triggered reporting for FR2 with SSB time index detection

Parameter	Unit	Test configuration	Cell 2	
			T1	T2
AoA setup defined in A.3.15.1		1, 2	Setup 1	
Assumption for UE beams ^{Note 5}		1, 2	Rough	
NR RF Channel Number		1, 2	1	
Duplex mode		1, 2	TDD	

TDD configuration			1, 2	TDDConf.3.1	
BW _{channel}		MHz	1, 2	100: N _{RB,c} = 66	
OCNG patterns defined in A.3.2.1.1			1, 2	OP.1	
SMTC configuration defined in A.3.11.1 and A.3.11.2			1	SMTC.2	
			2	SMTC.1	
PDSCH/PDCCH subcarrier spacing		kHz	1, 2	120	
b1-ThresholdNR	UE power class 3	dBm/SCS	1, 2	-206	
EPRE ratio of PSS to SSS			1, 2	0	
EPRE ratio of PBCH DMRS to SSS					
EPRE ratio of PBCH to PBCH DMRS					
EPRE ratio of PDCCH DMRS to SSS					
EPRE ratio of PDCCH to PDCCH DMRS					
EPRE ratio of PDSCH DMRS to SSS					
EPRE ratio of PDSCH to PDSCH					
EPRE ratio of OCNG DMRS to SSS (Note 1)					
EPRE ratio of OCNG to OCNG DMRS (Note 1)					
N _{oc} ^{Note2}		dBm/15kHz	1, 2	-104.7	
N _{oc} ^{Note2}		dBm/SCS	1, 2	-95.7	
SS-RSRP ^{Note 3}		dBm/SCS	1, 2	-Infinity	-87.7
Ê _s /I _{ot}		dB	1, 2	-Infinity	8
Ê _s /N _{oc}		dB	1, 2	-Infinity	8
I _o ^{Note3}		dBm/95.04MH z	1, 2	-66.7	-58. 0
Propagation Condition			1, 2	AWGN	
Note 1:	OCNG shall be used such that the cell is fully allocated and a constant total transmitted power spectral density is achieved for all OFDM symbols.				
Note 2:	Interference from other cells and noise sources not specified in the test is assumed to be constant over subcarriers and time and shall be modelled as AWGN of appropriate power for N _{oc} to be fulfilled.				
Note 3:	SS-RSRP and I _o levels have been derived from other parameters for information purposes. They are not settable parameters themselves.				
Note 4:	SS-RSRP minimum requirements are specified assuming independent interference and noise at each receiver antenna port.				
Note 5:	Information about types of UE beam is given in B.2.1.3, and does not limit UE implementation or test system implementation				

A.18.3.1.8.2 Test Requirements

In test 1 with per-UE gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D1 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 2 with per-UE gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D2 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 3 with per-FR gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D3 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In test 4 with per-FR gap, the UE shall send one Event B1 triggered measurement report, with a measurement reporting delay less than D4 ms from the beginning of time period T2. The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled. The rate of correct events observed during repeated tests shall be at least 90%.

In tests 1, 2, 3 and 4, the UE is required to report SSB time index.

Table A.18.3.1.8.2-1: Test requirements for NR inter-RAT event triggered reporting for FR2 with SSB time index detection in DRX

Test case	Measurement reporting delay (ms)			
	Test 1: D1 ms	Test 2: D2 ms	Test 3: D3 ms	Test 4: D4 ms
UE power class 3	6240	66560	6240	66560

NOTE: The actual overall delays measured in the test may be up to $2 \times TTI_{DCCH}$ higher than the measurement reporting delays above because of TTI insertion uncertainty of the measurement report in DCCH.

Annex B (normative): Conditions for RRM requirements applicability for operating bands

B.1 Conditions for NR RRC_IDLE state mobility

B.1.1 Introduction

In Annex B.1, the following conditions are specified:

- UE conditions which shall apply for UE intra-frequency measurements procedures and requirements in clause 4,
- UE conditions which shall apply for UE inter-frequency measurements procedures and requirements in clause 4.

B.1.2 Conditions for measurements on NR intra-frequency cells for cell re-selection

This clause defines the following conditions for NR intra-frequency measurements performed based on SSBs for cell re-selection: SSB_{RP} and SSB $\hat{E}$ s/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.1.2-1 for FR1 NR cells.

The conditions are defined in Table B.1.2-2 for FR2 NR cells.

Table B.1.2-1: Conditions for intra-frequency cell re-selection in FR1

Parameter	NR operating band groups ^{Note1}	Minimum SSB_RP		SSB Ês/lot
		dBm / SCS _{SSB}		dB
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-124	-121	≥ -4
	NR_FDD_FR1_B	-123.5	-120.5	
	NR_TDD_FR1_C	-123	-120	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	
	NR_FDD_FR1_F	-121.5	-118.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-118	
	NR_FDD_FR1_H	-120.5	-117.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.1.2-2: Conditions for intra-frequency cell re-selection in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB _{RP} ^{Note 2, Note 3}							SSB $\hat{E}$ s/Iot
			dBm / SCS _{SSB}							dB
			SCS _{SSB} = 120 kHz						SCS _{SSB} = 240 kHz	
			UE Power class						UE Power class	
			1	2	3	4	5	6	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-107.3	-110.8	-109.1	-124.8+Y ₄	-104.9	-104.9	(Value for SCS _{SSB} = 120 kHz) +3dB	≥ -4
		n258	-107.3	-110.8	-109.1	-124.8+Y ₄	-105.1	-105.1		

Spherical coverage Note 1	n259			-105.5		-102.0		(Value for $SCS_{SSB} = 120$ kHz) +3dB	≥ -4
	n260	-104.3		-106.5	-122.8+Y ₄				
	n261	-107.3	-110.8	-109.1	-124.8+Y ₄		-104.9		
	n262	-102.3	-105.6	-103.6	-118.8+Y ₄				
	n257	-99.3	-99.8	-98.2	-115.8+Z ₄	-96.9	-96.9		
	n259			-92.7					
	n258	-99.3	-99.8	-98.2	-115.8+Z ₄	-97.1	-97.1		
	n260	-96.3		-93.9	-110.8+Z ₄				
	n261	-99.3	-99.8	-98.2	-115.8+Z ₄		-96.9		
	n262	-94.1	-93.7	-90.5	-106.7+Z ₄				

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum SSB $\hat{E}_s/I_{ot}$, with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.1.2-2:

- The value of Y for Power class 4 is FFS, where Y₄ is the rough/fine beam gain difference in Rx beam peak direction for Power class 4

- The value of Z for Power class 4 is FFS, where Z₄ is the rough/fine beam gain difference in spherical coverage directions for Power class 4.

B.1.2A Conditions for measurements on NR intra-frequency cells under CCA for cell re-selection

This clause defines the following conditions for NR intra-frequency measurements performed based on SSBs for cell re-selection: SSB_{RP} and SSB $\hat{E}_s/I_{ot}$, applicable for a corresponding operating band.

The conditions are defined in Table B.1.2A-1 for FR1 NR cells under CCA.

Table B.1.2A-1: Conditions for intra-frequency cell re-selection in FR1 under CCA

Parameter	NR operating band groups ^{Note1}	Minimum SSB_RP		SSB $\hat{E}_s/I_{ot}$
		dBm / SCS _{SSB}		dB
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_CCA_FR1_I	-120	-117	≥ -4
	NR_CCA_FR1_J	-119.5	-116.5	
NOTE 1: NR operating band groups are as defined in clause 3.5.2.				

NOTE 1: NR operating band groups are as defined in clause 3.5.2.

B.1.3 Conditions for measurements on NR inter-frequency cells for cell re-selection

This clause defines the following conditions for NR inter-frequency measurements performed based on SSBs for cell re-selection: SSB_{RP} and SSB $\hat{E}_s/I_{ot}$, applicable for a corresponding operating band.

The conditions defined in Table B.1.2-1 for FR1 NR intra-frequency cell re-selection shall also apply for FR1 NR inter-frequency cells in this clause.

The conditions defined in Table B.1.2-2 for FR2 NR intra-frequency cell re-selection shall also apply for FR2 NR inter-frequency cells in this clause.

B.1.3A Conditions for measurements on NR inter-frequency cells under CCA for cell re-selection

This clause defines the following conditions for NR inter-frequency measurements performed based on SSBs for cell re-selection: SSB_{RP} and SSB $\hat{E}_s/I_{ot}$, applicable for a corresponding operating band.

The conditions defined in Table B.1.2A-1 for FR1 NR intra-frequency cells under CCA shall also apply to FR1 NR inter-frequency cells under CCA in this clause.

B.1.4 Conditions for measurements on NR intra-frequency cells for cell re-selection for RedCap

This clause defines the following conditions for RedCap NR intra-frequency measurements performed based on SSBs for cell re-selection: SSB_{RP} and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.1.4-1 and Table B.1.4-2 for 2 Rx and 1 Rx RedCap respectively for FR1 NR cells.

The conditions are defined in Table B.1.4-3 for FR2 NR cells.

Table B.1.4-1: Conditions for intra-frequency cell re-selection in FR1 for 2Rx RedCap

Parameter	NR operating band groups ^{Note1}	Minimum SSB_RP		SSB Ês/lot
		dBm / SCS _{SSB}		dB
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-124	-121	≥ -4
	NR_FDD_FR1_B	-123.5	-120.5	
	NR_FDD_FR1_C NR_TDD_FR1_C	-123	-120	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	
	NR_FDD_FR1_F	-121.5	-118.5	
	NR_FDD_FR1_G	-121	-118	
	NR_FDD_FR1_H	-120.5	-117.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.1.4-2: Conditions for intra-frequency cell re-selection in FR1 for 1Rx RedCap

Parameter	NR operating band groups ^{Note1}	Minimum SSB_RP		SSB Ês/lot
		dBm / SCS _{SSB}		dB
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-124	-121	≥ -4
	NR_FDD_FR1_B	-123.5	-120.5	
	NR_FDD_FR1_C NR_TDD_FR1_C	-123	-120	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	
	NR_FDD_FR1_F	-121.5	-118.5	
	NR_FDD_FR1_G	-121	-118	
	NR_FDD_FR1_H	-120.5	-117.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.1.4-3: Conditions for intra-frequency cell re-selection in FR2 for RedCap

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3							SSB Ês/lot
			dBm / SCS _{SSB}							dB
			SCS _{SSB} = 120 kHz						SCS _{SSB} = 240 kHz	
			UE Power class						UE Power class	
			1	2	3	4	5	7	1, 2, 3, 4, 5, 7	

Conditions	Rx Beam Peak	n257	-107.3	- 110.8	- 109.1	- 124.8+Y ₄	- 120.4+Y ₅	- 113.1+Y ₇	(Value for SCS _{SSB} = 120 kHz) +3dB	≥-4
		n258	-107.3	- 110.8	- 109.1	- 124.8+Y ₄	- 120.6+Y ₅	- 113.1+Y ₇		
		n261	-107.3	- 110.8	- 109.1	- 124.8+Y ₄	-	- 113.1+Y ₇		
	Spherical coverage Note 1	n257	-99.3	-99.8	-98.2	- 115.8+Z ₄	- 112.4+Z ₅	- 102.2+Z ₇	(Value for SCS _{SSB} = 120 kHz) +3dB	≥-4
		n258	-99.3	-99.8	-98.2	- 115.8+Z ₄	- 112.6+Z ₅	- 102.2+Z ₇		
		n261	-99.3	-99.8	-98.2	- 115.8+Z ₄	-	- 102.2+Z ₇		

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum SSB Ês/Iot, with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΔMB_{P,n} and Spherical coverage values are increased by ΔMB_{S,n}, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.1.2-2:

- The value of Y for Power classes 4, 5 and 7 is FFS, where Y₄, Y₅ and Y₇ are the rough/fine beam gain differences in Rx beam peak direction for Power classes 4, 5 and 7 respectively
- The value of Z for Power classes 4, 5 and 7 is FFS, where Z₄ and Z₅ are the rough/fine beam gain differences in spherical coverage directions for Power classes 4, 5, and 7 respectively

B.1.5 Conditions for measurements on NR inter-frequency cells for cell re-selection for RedCap

This clause defines the following conditions for RedCap NR inter-frequency measurements performed based on SSBs for cell re-selection: SSB_{RP} and SSB Ês/Iot, applicable for a corresponding operating band.

The conditions defined in Table B.1.4-1 and Table B.1.4-2 for 2 Rx and 1 Rx RedCap respectively for FR1 RedCap NR intra-frequency cell re-selection shall also apply for FR1 RedCap NR inter-frequency cells in this clause.

The conditions defined in Table B.1.4-3 for FR2 RedCap NR intra-frequency cell re-selection shall also apply for FR2 RedCap NR inter-frequency cells in this clause.

B.1.6 Conditions for measurements on NR intra-frequency cells for cell re-selection for satellite access

This clause defines the following conditions for NR intra-frequency measurements performed based on SSBs for cell re-selection: SSB_{RP} and SSB Ês/Iot, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.1.6-1 for FR1 NR cells.

Table B.1.6-1: Conditions for intra-frequency cell re-selection in FR1 for satellite access

Parameter	NR operating band groups ^{Note1}	Minimum SSB _{RP}		SSB Ês/Iot
		dBm / SCS _{SSB}		dB
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_SAB_FR1_A	-124	-121	≥ -4

NOTE 1: NR operating band groups for satellite access are defined in clause 3.5.2A.

B.1.7 Conditions for measurements on NR inter-frequency cells for cell re-selection for satellite access

This clause defines the following conditions for NR inter-frequency measurements performed based on SSBs for cell re-selection: SSB_{RP} and SSB $\hat{E}_s/I_{ot}$, applicable for a corresponding operating band for satellite access.

The conditions defined in Table B.1.6-1 for FR1 NR intra-frequency cell re-selection for satellite access shall also apply for FR1 NR inter-frequency cells for satellite access in this clause.

B.2 Conditions for UE measurements procedures and performance requirements in RRC_CONNECTED state

B.2.1 Introduction

B.2.1.1 General

In Annex B.2, the following conditions are specified:

- The conditions for RRC connection release with redirection to NR requirements in clause 6.2.3.2.1,
- The conditions for UE transmit timing adjustment in clause 7.1
- UE conditions which shall apply for UE intra-frequency measurements procedures and requirements in clause 9, UE conditions which shall apply for UE inter-frequency measurements procedures and requirements in clause 9,
- UE conditions which shall apply for UE intra-frequency measurements performance requirements in clause 10,
- UE conditions which shall apply for UE inter-frequency measurements performance requirements in clause 10.

B.2.1.2 Derivation of Minimum SSB_{RP} values for FR1

[FFS]

B.2.1.3 Derivation of Minimum SSB_{RP} values for FR2

Editor's note:

- *The Assumption for UE beams (fine or rough) in Annex A RRM test cases is defined based on power class 3, and unless otherwise stated also applies for other UE power classes*

B.2.1.3.1 Minimum SSB_{RP} values for Rx Beam Peak angle of arrival

Minimum SSB_{RP} values in Tables B.2.2-2 and B.2.3-2 are based on Reference sensitivity for the Operating band and for the UE power class, taking a baseline of UE Power class 3 in Band n260 with 50 MHz channel bandwidth.

Minimum SSB_{RP} = Reference sensitivity_{PC3, n260, 50MHz} + Y - 10Log₁₀(PRB_{Refsens} x 12) – SNR_{Refsens} + SSB $\hat{E}_s/I_{ot}$ + $\Delta MB_{P,n}$

where:

Reference sensitivity_{PC3, n260, 50MHz} is the reference sensitivity value in dBm specified for power class 3 in Band n260 for 50 MHz Channel bandwidth in Table 7.3.2.3-1 of TS 38.101-2 [19];

Y is the gain difference between fine and rough beams, which is defined in Table B.2.1.3.1-1;

Table B.2.1.3.1-1: Gain difference Y between fine and rough beams, Rx beam peak direction

Value “Y” in dB, for each UE power class						
1	2	3	4	5	6	7
18	9.0	7.0	FFS	15.5	15.5	FFS

PRB_{Refsens} is N_{RB} associated with subcarrier spacing 120 kHz for 50MHz in TS 38.101-2 [19] Table 5.3.2-1, and is 32;

12 is the number of subcarriers in a PRB;

SNR_{Refsens} is the SNR used for simulation of Refsens and EIS spherical coverage, and is -1 dB;

$SSB \hat{E}_s/I_{ot}$ is the minimum value required by the UE to perform measurements, and is -6 dB for intra-frequency measurements and -4 dB for inter-frequency measurements. The only contribution to I_{ot} is the UE internal noise;

$\Delta MB_{p,n}$ is the UE multi-band relaxation factor value in dB specified in TS 38.101-2 [19] clause 6.2.1.

The calculated Minimum SSB_RP value for the baseline of UE power class 3 in Band n260 is (-109.5+ $\Delta MB_{p,n}$) dBm/120kHz for intra-frequency measurements and (-107.5+ $\Delta MB_{p,n}$) dBm/120kHz for inter-frequency measurements.

The following methodology to define the Minimum SSB_RP level for power class X (PC_X) and operating band Y (Band_Y) is used:

For Intra-frequency: Minimum SSB_RP (PC_X, Band_Y) = -109.5 dBm/120kHz + Refsens_{PC_X, Band_Y, 50MHz} – Refsens_{PC3, n260, 50MHz} + $Y_{PC_X} - Y_{PC3} + \Delta MB_{p,n}$,

For Inter-frequency: Minimum SSB_RP (PC_X, Band_Y) = -107.5 dBm/120kHz + Refsens_{PC_X, Band_Y, 50MHz} – Refsens_{PC3, n260, 50MHz} + $Y_{PC_X} - Y_{PC3} + \Delta MB_{p,n}$.

B.2.1.3.2 Minimum SSB_RP values for angle of arrival within Spherical coverage

Minimum SSB_RP values in Tables B.2.2-2 and B.2.3-2 are based on EIS spherical coverage for the Operating band and for the UE power class, taking a baseline of UE power class 3 in Band n260 with 50 MHz channel bandwidth.

Minimum SSB_RP = EIS spherical coverage_{PC3, n260, 50MHz} + Z -10Log₁₀($PRB_{\text{Refsens}} \times 12$) – SNR_{Refsens} + $SSB \hat{E}_s/I_{ot}$ + $\Delta MB_{S,n}$

where:

EIS spherical coverage_{PC3, n260, 50MHz} is the EIS spherical coverage value in dBm specified for power class 3 in Band n260 for 50MHz Channel bandwidth in TS 38.101-2 [19] Table 7.3.4.3-1;

Z is the gain difference between fine and rough beams, and is defined in Table B.2.1.3.2-1;

Table B.2.1.3.2-1: Gain difference Z between fine and rough beams, Spherical coverage directions

Value “Z” in dB, for each UE power class						
1	2	3	4	5	6	7
18	9.0	7.0	FFS	15.5	15.5	FFS

PRB_{Refsens} is N_{RB} associated with subcarrier spacing 120 kHz for 50MHz in TS 38.101-2 [19] Table 5.3.2-1, and is 32;

12 is the number of subcarriers in a PRB;

SNR_{Refsens} is the SNR used for simulation of Refsens and EIS spherical coverage, and is -1 dB;

$SSB \hat{E}_s/I_{ot}$ is the minimum value required by the UE to perform measurements, and is -6 dB for intra-frequency measurements and -4 dB for inter-frequency measurements. The only contribution to I_{ot} is the UE internal noise;

$\Delta MB_{S,n}$ is the UE multi-band relaxation factor value in dB specified in TS 38.101-2 [19] clause 6.2.1.

The calculated Minimum SSB_RP value for the baseline of UE power class 3 in Band n260 is (-96.9+ $\Delta MB_{S,n}$) dBm/120kHz for intra-frequency measurements and is (-94.9+ $\Delta MB_{S,n}$) dBm/120kHz for inter-frequency measurements.

The following methodology to define the Minimum SSB_RP level for power class X (PC_X) and operating band Y (Band_Y) is used:

For Intra-frequency: Minimum SSB_RP (PC_X, Band_Y) = -96.9 dBm/120kHz + EIS spherical coverage_{PC_X, Band_Y, 50MHz} – EIS spherical coverage_{PC3, n260, 50MHz} + Z_{PC_X} – Z_{PC3} + ΔMB_{S,n}

For Inter-frequency: Minimum SSB_RP (PC_X, Band_Y) = -94.9 dBm/120kHz + EIS spherical coverage_{PC_X, Band_Y, 50MHz} – EIS spherical coverage_{PC3, n260, 50MHz} + Z_{PC_X} – Z_{PC3} + ΔMB_{S,n}

B.2.1.4 Gain to SS-RSRP and CSI-RSRP measurement point for FR1

In FR1 conducted requirements are specified at the UE antenna connector, which is also the SS-RSRP and CSI-RSRP measurement point.

B.2.1.5 Gain to SS-RSRP and CSI-RSRP measurement point for FR2

B.2.1.5.1 Gain to SS-RSRP and CSI-RSRP measurement point for Rx Beam Peak angle of arrival

In clause 5.1.1 of TS 38.215 [4] SS-RSRP and CSI-RSRP is defined to be measured based on the combined signal from antenna elements corresponding to a given receiver branch. The reference point for requirement parameters from the UE perspective is the input of the UE antenna array. The gain “G” relates the combined signal from antenna elements corresponding to a given receiver branch to the reference point for requirement parameters.

The gain “G” affects absolute signal level values reported by the UE.

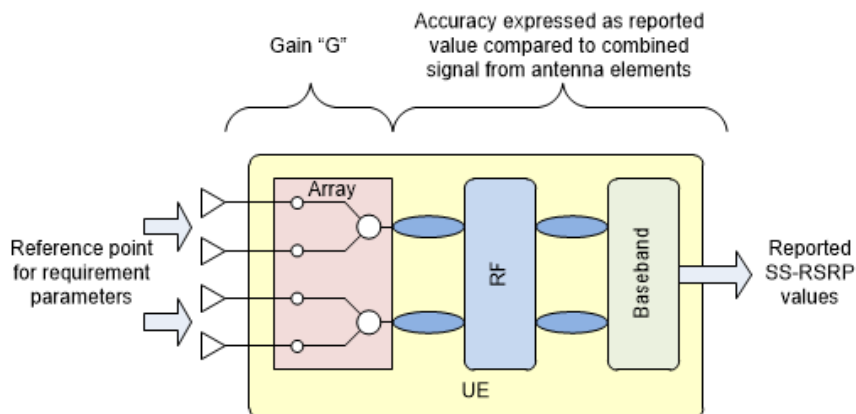


Figure B.2.1.5.1-1: Gain and Reference point for requirement parameters

The gain range for each power class is specified in Table B.2.1.5.1-1.

Table B.2.1.5.1-1: UE gain G, Rx beam peak direction

	UE Power class						
	1	2	3	4	5	6	7
Minimum, dBi	0	FFS	-10	FFS	-5	-5	FFS
Maximum, dBi	+50	FFS	+20	FFS	+44	+44	FFS

Gain range in spherical coverage directions may be lower than in Rx beam peak direction, according to the difference between the EIS spherical coverage value specified in TS 38.101-2 [19] clause 7.3.4 and the Reference sensitivity level specified in TS 38.101-2 [19] clause 7.3.2.

B.2.1.5.2 Gain to SS-RSRP measurement point for different frequency

In any specific direction, the UE gain G may be different depending on frequencies. The gain “G_{inter}” affects relative signal level values reported by the UE when measuring between different frequencies and is specified in Table B.2.1.5.2-1 for each power class.

Table B.2.1.5.2-1: UE gain difference between inter-frequencies G_{inter}

	UE Power class						
	1	2	3	4	5	6	7
Maximum difference, dB	3	FFS	3	FFS	[3]	[3]	FFS

B.2.1.5.3 Alignment of Rough beam to Rx beam Peak

The definition of Rx Beam Peak in TS 38.101-2 [19] clause 7.3.2 is based on Throughput at Reference sensitivity power level, and assumes use of Fine beams. In many RRM scenarios the UE can use Rough beams, but the largest Rough beam gain direction may not be aligned to the Fine beam Peak direction.

When the Rx Beam Peak is selected and defined based on Fine Beams, the rough beam gain in that direction may be lower than the largest rough beam gain in another direction within Spherical Coverage. The term “D” is the maximum allowed rough beam gain reduction, and is specified in Table B.2.1.5.3-1 for each power class.

Table B.2.1.5.3-1: Rough Beam gain reduction “D” in Rx Beam Peak direction


	UE Power class						
	1	2	3	4	5	6	7
Maximum gain reduction, dB	11.5	FFS	5.5	FFS	10	10	FFS

B.2.1.6 Gain to PRS-RSRP measurement point for FR2

B.2.1.6.1 Gain to PRS-RSRP measurement point for Rx Beam Peak angle of arrival

In clause 5.1.28 of TS 38.215 [4] PRS-RSRP is defined to be measured based on the combined signal from antenna elements corresponding to a given receiver branch. The reference point for requirement parameters from the UE perspective is the input of the UE antenna array. The gain “G” relates the combined signal from antenna elements corresponding to a given receiver branch to the reference point for requirement parameters.

The gain “G” affects absolute signal level values reported by the UE.

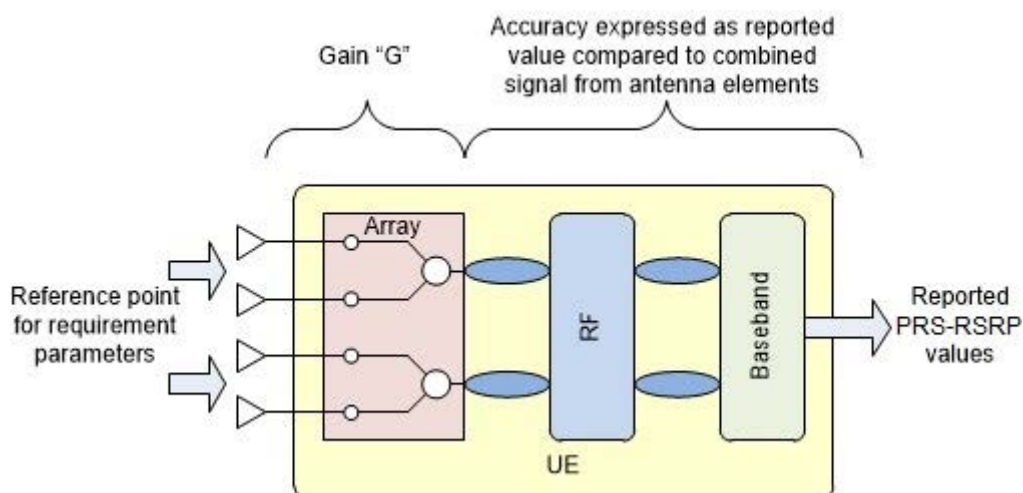**Figure B.2.1.6.1-1: Gain and Reference point for requirement parameters**

The gain range for each power class is specified in Table B.2.1.6.1-1.

Table B.2.1.6.1-1: UE gain G, Rx beam peak direction

	UE Power class				
	1	2	3	4	7
Minimum, dBi	FFS	FFS	-10	FFS	FFS
Maximum, dBi	FFS	FFS	+20	FFS	FFS

Gain range in spherical coverage directions may be lower than in Rx beam peak direction, according to the difference between the EIS spherical coverage value specified in TS 38.101-2 [19] clause 7.3.4 and the Reference sensitivity level specified in TS 38.101-2 [19] clause 7.3.2.

B.2.2 Conditions for NR intra-frequency measurements

This clause defines the following conditions for NR intra-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB $\hat{E}_s/\text{lot}$, applicable for a corresponding operating band.

The conditions are defined in Table B.2.2-1 for FR1 NR cells.

The conditions are defined in Table B.2.2-2 for FR2 NR cells.

Table B.2.2-1: Conditions for intra-frequency measurements in FR1

Parameter	NR operating band groups ^{Note1}	Minimum SSB_RP		SSB $\hat{E}_s/\text{lot}$
		dBm / SCS _{SSB}		dB
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR SDL FR1_A	-127	-124	≥ -6
	NR_FDD_FR1_B	-126.5	-123.5	
	NR_TDD_FR1_C	-126	-123	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	
	NR_FDD_FR1_F	-124.5	-121.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-124	-121	
	NR_FDD_FR1_H	-123.5	-120.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.2.2-2: Conditions for intra-frequency measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP ^{Note 2, Note 3}							SSB $\hat{E}_s/\text{lot}$
			dBm / SCS _{SSB}							dB
			SCS _{SSB} = 120 kHz						SCS _{SSB} = 240 kHz	
			UE Power class						UE Power class	
			1	2	3	4	5	6	1, 2, 3, 4, 5, 6	
Conditions	Rx Beam Peak	n257	-110.3	-113.8	-112.1	-127.8+Y ₄	-123.4+Y ₅	-107.9	(Value for SCS _{SSB} = 120 kHz) +3dB	≥-6
		n258	-110.3	-113.8	-112.1	-127.8+Y ₄	-123.6+Y ₅	-108.1		
		n259			-108.5		-120.5+Y ₅			
		n260	-107.3		-109.5	-125.8+Y ₄				
		n261	-110.3	-113.8	-112.1	-127.8+Y ₄		-107.9		
		n262	-105.3	-108,6	-106.6	-121.8+Y ₄				
	Spherical coverage ^{Note 1}	n257	-102.3	-102.8	-101.2	-118.8+Z ₄	-115.4+Z ₅	-99.9	(Value for SCS _{SSB} = 120 kHz) +3dB	≥-6
		n258	-102.3	-102.8	-101.2	-118.8+Z ₄	-115.6+Z ₅	-100.1		
		n259			-95.7					

		n260	-99.3		-96.9	-113.8+Z ₄			
		n261	-102.3	-102.8	-101.2	-118.8+Z ₄		-99.9	
		n262	-97.1	-96.7	-93.5	-109.7+Z ₄			
Note 1:	Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.								
Note 2:	Values specified at the Reference point to give minimum SSB Ês/lot, with no applied noise.								
Note 3:	For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΔMB _{P,n} and Spherical coverage values are increased by ΔMB _{S,n} , the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].								

Editor's notes for Table B.2.2-2:

- The value of Y for power classes 4 and 5 is FFS, where Y₄ and Y₅ are the rough/fine beam gain differences in Rx beam peak direction for power classes 4 and 5 respectively.

- The value of Z for power classes 4 and 5 is FFS, where Z₄ and Z₅ are the rough/fine beam gain differences in spherical coverage directions for power classes 4 and 5 respectively.

B.2.3 Conditions for NR inter-frequency measurements

This clause defines the following conditions for NR inter-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/lot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.3-1 for FR1 NR cells.

The conditions are defined in Table B.2.3-2 for FR2 NR cells.

Table B.2.3-1: Conditions for inter-frequency measurements in FR1

Parameter	NR operating band groups ^{Note1}	Minimum SSB_RP		SSB Ês/lot dB
		dBm / SCS _{SSB}		
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR SDL FR1_A	-125	-122	≥ -4
	NR FDD FR1_B	-124.5	-121.5	
	NR TDD FR1_C	-124	-121	
	NR FDD FR1_D, NR TDD FR1_D	-124.5	-120.5	
	NR FDD FR1_E, NR TDD FR1_E	-123	-120	
	NR FDD FR1_F	-122.5	-119.5	
	NR FDD FR1_G, NR TDD FR1_G	-122	-119	
	NR FDD FR1_H	-121.5	-118.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.2.3-2: Conditions for inter-frequency measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3						SSB Ês/lot
			dBm / SCS _{SSB}						dB
			SCS _{SSB} = 120 kHz				SCS _{SSB} = 240 kHz		
			UE Power class				UE Power class		
			1	2	3	4	5	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-108.3	-111.8	-110.1	-125.8+Y ₄	-121.4+Y ₅	(Value for SCS _{SSB} = 120 kHz) +3dB	≥-4
		n258	-108.3	-111.8	-110.1	-125.8+Y ₄	-121.6+Y ₅		
		n259			-106.5		-118.5+Y ₅		
		n260	-105.3		-107.5	-123.8+Y ₄			
		n261	-108.3	-111.8	-110.1	-125.8+Y ₄			
		n262	-103.3	-106.6	-104.6	-119.8+Y ₄			
	Spherical coverage Note 1	n257	-100.3	-100.8	-99.2	-116.8+Z ₄	-113.4+Z ₅	(Value for SCS _{SSB} = 120 kHz) +3dB	≥-4
		n258	-100.3	-100.8	-99.2	-116.8+Z ₄	-113.6+Z ₅		
		n259			-93.7				

	n260	-97.3		-94.9	-111.8+Z ₄	
	n261	-100.3	-100.8	-99.2	-116.8+Z ₄	
	n262	-95.1	-94.7	-91.5	-107.7+Z ₄	

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum SSB $\hat{E}_s/\text{lot}$, with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta\text{MB}_{P,n}$ and Spherical coverage values are increased by $\Delta\text{MB}_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.3-2:

- The value of Y for power classes 4 and 5 is FFS, where Y₄ and Y₅ are the rough/fine beam gain differences in Rx beam peak direction for power classes 4 and 5 respectively

- The value of Z for power classes 4 and 5 is FFS, where Z₄ and Z₅ are the rough/fine beam gain differences in spherical coverage directions for power classes 4 and 5 respectively

B.2.4 Conditions for NR L1-RSRP reporting

B.2.4.1 Conditions for SSB based L1-RSRP reporting

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on SSBs: SSB_RP and SSB $\hat{E}_s/\text{lot}$, applicable for a corresponding operating band.

The conditions are defined in Table B.2.4.1-1 for FR1 NR cells.

The conditions are defined in Table B.2.4.1-2 for FR2 NR cells.

Table B.2.4.1-1: Conditions for SSB based L1-RSRP measurements in FR1

Parameter	NR operating band groups ^{Note1}	Minimum SSB_RP		SSB Ês/lot dB
		dBm / SCS _{SSB}		
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-121	≥ -3
	NR_FDD_FR1_B	-123.5	-120.5	
	NR_TDD_FR1_C	-123	-120	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	
	NR_FDD_FR1_F	-121.5	-118.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-118	
	NR_FDD_FR1_H	-120.5	-117.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.2.4.1-2: Conditions for SSB based L1-RSRP measurements in FR2

Parameter	Angle of arrival	NR operating bands			Minimum SSB_RP Note 2, Note 3						SSB $\hat{E}_s/\text{lot}$
					dBm / SCS _{SSB}						dB
			SCS _{SSB} = 120 kHz						SCS _{SSB} = 240 kHz		
			UE Power class						UE Power class		
			1	2	3	4	5	6	1, 2, 3, 4, 5, 6		
Conditions	Rx Beam Peak	n257	-107.3	-110.8	-109.1	-124.8+Y ₄	-120.4+Y ₅	-120.4+Y ₆	(Value for SCS _{SSB} = 120	≥-3	

									kHz) +3dB	
		n258	-107.3	-110.8	-109.1	-124.8+Y ₄	-120.6+Y ₅	-120.6+Y ₆		
		n259			-105.5		-117.5+Y ₅			
		n260	-104.3		-106.5	-122.8+Y ₄				
		n261	-107.3	-110.8	-109.1	-124.8+Y ₄		-120.4+Y ₆		
		n262	-102.3	-105.6	-103.6	-118.8+Y ₄				
	Spherical coverage Note 1	n257	-99.3	-99.8	-98.2	-115.8+Z ₄	-112.4+Z ₅	-112.4+Z ₆	(Value for SCS _{SSB} = 120 kHz) +3dB	≥ -3
		n258	-99.3	-99.8	-98.2	-115.8+Z ₄	-112.6+Z ₅	-112.6+Z ₆		
		n259			-92.7					
		n260	-96.3		-93.9	-110.8+Z ₄				
		n261	-99.3	-99.8	-98.2	-115.8+Z ₄		-112.4+Z ₆		
		n262	-94.3	-93.7	-90.5	-106.7+Z ₄				

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum SSB Ês/lot, with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.4.1-2:

- The value of Y for power classes 4 and 5 is FFS, where Y₄ and Y₅ are the rough/fine beam gain differences in Rx beam peak direction for power classes 1, 4 and 5 respectively

- The value of Z for power classes 4 and 5 is FFS, where Z₄ and Z₅ are the rough/fine beam gain differences in spherical coverage directions for power classes 4 and 5 respectively

B.2.4.2 Conditions for CSI-RS based L1-RSRP reporting

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on CSI-RS: CSI-RS_RP and CSI-RS Ês/lot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.4.2-1 for FR1 NR cells.

The conditions are defined in Table B.2.4.2-2 for FR2 NR cells.

Table B.2.4.2-1: Conditions for CSI-RS based L1-RSRP measurements in FR1

Parameter	NR operating band groups Note1	Minimum CSI-RS_RP			CSI-RS Ês/lot
		dBm / SCS _{CSI-RS}			dB
		SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-121	-118	≥ -3
	NR_FDD_FR1_B	-123.5	-120.5	-117.5	
	NR_TDD_FR1_C	-123	-120	-117	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	-116.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	-116	
	NR_FDD_FR1_F	-121.5	-118.5	-115.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-118	-115	
	NR_FDD_FR1_H	-120.5	-117.5	-114.5	

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.4.2-2: Conditions for CSI-RS based L1-RSRP measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum CSI-RS_RP Note 2, Note 3						CSI-RS Ês/lot
			dBm / SCS _{CSI-RS}						dB
			SCS _{CSI-RS} = 60 kHz				SCS _{CSI-RS} = 120 kHz		
			UE Power class				UE Power class		
			1	2	3	4	5	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-110.3	-113.8	-112.1	-127.8+Y ₄	-123.4+Y ₅	(Value for SCS _{CSI-RS} = 60 kHz) +3dB	≥-3
		n258	-110.3	-113.8	-112.1	-127.8+Y ₄	-123.6+Y ₅		
		n259			-108.5		-120.5+Y ₅		
		n260	-107.3		-109.5	-125.8+Y ₄			
		n261	-110.3	-113.8	-112.1	-127.8+Y ₄			
		n262	-105.3	-108.6	-106.6	-121.8+Y ₄			
	Spherical coverage Note 1	n257	-102.3	-102.8	-101.2	-118.8+Z ₄	-115.4+Z ₅	(Value for SCS _{CSI-RS} = 60 kHz) +3dB	≥-3
		n258	-102.3	-102.8	-101.2	-118.8+Z ₄	-115.6+Z ₅		
		n259			-95.7				
		n260	-99.3		-96.9	-113.8+Z ₄			
		n261	-102.3	-102.8	-101.2	-118.8+Z ₄			
		n262	-97.1	-96.7	-93.5	-109.7+Z ₄			

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum CSI-RS Ês/lot, with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΔMB_{P,n} and Spherical coverage values are increased by ΔMB_{S,n}, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.4.2-2:

- The value of Y for power classes 4 and 5 is FFS, where Y₄ and Y₅ are the rough/fine beam gain differences in Rx beam peak direction for power classes 4 and 5 respectively

- The value of Z for power classes 4 and 5 is FFS, where Z₄ and Z₅ are the rough/fine beam gain differences in spherical coverage directions for power classes 4 and 5 respectively

B.2.5 Conditions for RRC connection release with redirection to NR

This clause defines the following conditions for RRC connection release with redirection to NR: SSB_{RP} and SSB Ês/lot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.5-1 for FR1 NR cells.

The conditions are defined in Table B.2.5-2 for FR2 NR cells.

Table B.2.5-1: Conditions for for RRC connection release with redirection to NR in FR1

Parameter	NR operating band groups ^{Note1}	Minimum SSB_RP		SSB Ês/lot dB
		dBm / SCS _{SSB}		
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-125	-122	≥ -4
	NR_FDD_FR1_B	-124.5	-121.5	
	NR_TDD_FR1_C	-124	-121	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-124.5	-120.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-123	-120	
	NR_FDD_FR1_F	-122.5	-119.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-122	-119	
	NR_FDD_FR1_H	-121.5	-118.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.5-2: Conditions for RRC connection release with redirection to NR in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3						SSB Ês/lot
			dBm / SCS _{SSB}						dB
			SCS _{SSB} = 120 kHz				SCS _{SSB} = 240 kHz		
			UE Power class				UE Power class		
			1	2	3	4	5	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-108.3	-111.8	-110.1	-125.8+Y ₄	-121.4+Y ₅	(Value for SCS _{SSB} = 120 kHz) +3dB	≥-4
		n258	-108.3	-111.8	-110.1	-125.8+Y ₄	-121.6+Y ₅		
		n259			-106.5		-118.5+Y ₅		
		n260	-105.3		-107.5	-123.8+Y ₄			
		n261	-108.3	-111.8	-110.1	-125.8+Y ₄			
		n262	-103.3	-106.6	-104.6	-119.8+Y ₄			
	Spherical coverage Note 1	n257	-100.3	-100.8	-99.2	-116.8+Z ₄	-113.4+Z ₅	(Value for SCS _{SSB} = 120 kHz) +3dB	≥-4
		n258	-100.3	-100.8	-99.2	-116.8+Z ₄	-113.6+Z ₅		
		n259			-93.7				
		n260	-97.3		-94.9	-111.8+Z ₄			
		n261	-100.3	-100.8	-99.2	-116.8+Z ₄			
		n262	-95.1	-94.7	-91.5	-107.7+Z ₄			

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum SSB Ês/lot, with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.5.2-2:

- The value of Y for power classes 4 and 5 is FFS, where Y₄ and Y₅ are the rough/fine beam gain differences in Rx beam peak direction for power classes 4 and 5 respectively

- The value of Z for power classes 4 and 5 is FFS, where Z₄ and Z₅ are the rough/fine beam gain differences in spherical coverage directions for power classes 4 and 5 respectively

B.2.6 Void

B.2.6.1 Void

Table B.2.6.1-1: Void

Table B.2.6.1-2: Void

B.2.6.2 Void

B.2.7 Conditions for SRS-RSRP measurements

This clause defines the following conditions for SRS-RSRP measurement and corresponding procedures performed based on SRSs: SRS_{RP} and SRS Ês/lot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.7-1 for FR1 NR cells.

The conditions are defined in Table B.2.7-2 for FR2 NR cells.

Table B.2.7-1: Conditions for SRS-RSRP measurements in FR1

Parameter	NR operating band groups Note1	Minimum SRS _{RP}			SRS Ês/lot
		dBm / SCS _{SRS}			dB
		SCS _{SRS} = 15 kHz	SCS _{SRS} = 30 kHz	SCS _{SRS} = 60 kHz	

Conditions	NR_TDD_FR1_A	-120	-117	-114	≥ 1
	NR_TDD_FR1_C	-119	-116	-113	
	NR_TDD_FR1_D	-118.5	-115.5	-112.5	
	NR_TDD_FR1_E	-118	-115	-112	
	NR_TDD_FR1_F	-117.5	-114.5	-111.5	
	NR_TDD_FR1_G	-117	-114	-111	
NOTE 1: NR operating band groups are defined in clause 3.5.2.					

Table B.2.7-2: Conditions for SRS-RSRP measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SRS_RP Note 2, Note 3						SRS Ês/lot dB
			dBm / SCS _{SRS}						
			SCS _{SRS} = 60 kHz				SCS _{SRS} = 120 kHz		
			UE Power class				UE Power class		
			1	2	3	4	5	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-124.5	-119.0	-115.3	-124.0	-119.6	(Value for SCS _{SRS} = 60 kHz) +3dB	≥1
		n258	-124.5	-119.0	-115.3	-124.0	-119.8		
		n260	-121.5		-112.7	-122.0			
		n261	-124.5	-119.0	-115.3	-124.0			
	Spherical coverage Note 1	n257	-116.5	-108.0	-104.4	-115.0	-111.6	(Value for SCS _{SRS} = 60 kHz) +3dB	≥1
		n258	-116.5	-108.0	-104.4	-115.0	-111.8		
		n260	-113.5		-100.1	-110.0			
		n261	-116.5	-108.0	-104.4	-115.0			
NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.									
NOTE 2: Values specified at the Reference point to give minimum SRS Ês/lot, with no applied noise.									
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΔMB _{P,n} and Spherical coverage values are increased by ΔMB _{S,n} , the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].									

B.2.8 Conditions for NR L1-SINR reporting

B.2.8.1 Conditions for L1-SINR reporting with CSI-RS based CMR and no dedicated IMR configured

This clause defines the following conditions for NR L1-SINR measurement reporting and corresponding procedures performed based on CSI-RSs: CSI-RS_RP and CSI-RS $\hat{E}_s/\text{lot}$, applicable for a corresponding operating band.

The conditions defined in Table B.2.8.1-1 for FR1 NR cells.

The conditions defined in Table B.2.8.1-2 for FR2 NR cells.

Table B.2.8.1-1: Conditions for L1-SINR measurements with CSI-RS based CMR only in FR1

Parameter	NR operating band groups Note1	Minimum CSI-RS_RP			CSI-RS CMR $\hat{E}_s/\text{lot}$
		dBm / $\text{SCS}_{\text{CSI-RS}}$			dB
		$\text{SCS}_{\text{CSI-RS}} = 15 \text{ kHz}$	$\text{SCS}_{\text{CSI-RS}} = 30 \text{ kHz}$	$\text{SCS}_{\text{CSI-RS}} = 60 \text{ kHz}$	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-121	-118	≥ -3
	NR_FDD_FR1_B	-123.5	-120.5	-117.5	
	NR_TDD_FR1_C	-123	-120	-117	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	-116.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	-116	
	NR_FDD_FR1_F	-121.5	-118.5	-115.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-118	-115	
	NR_FDD_FR1_H	-120.5	-117.5	-114.5	

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.8.1-2: Conditions for L1-SINR measurements with CSI-RS based CMR only in FR2

Parameter	Angle of arrival	NR operating bands	Minimum CSI-RS_RP Note 2, Note 3						CSI-RS CMR Ês/lot
			dBm / SCS _{CSI-RS}						dB
			SCS _{CSI-RS} = 60 kHz				SCS _{CSI-RS} = 120 kHz		
			UE Power class				UE Power class		
			1	2	3	4	5	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-110.3	-113.8	-112.1	-127.8+Y ₄	-123.4+Y ₅	(Value for SCS _{CSI-RS} = 60 kHz) +3dB	≥-3
		n258	-110.3	-113.8	-112.1	-127.8+Y ₄	-123.6+Y ₅		
		n259			-108.5		-120.5+Y ₅		
		n260	-107.3		-109.5	-125.8+Y ₄			
		n261	-110.3	-113.8	-112.1	-127.8+Y ₄			
	Spherical coverage Note 1	n257	-102.3	-102.8	-101.2	-118.8+Z ₄	-115.4+Z ₅	(Value for SCS _{CSI-RS} = 60 kHz) +3dB	≥-3
		n258	-102.3	-102.8	-101.2	-118.8+Z ₄	-115.6+Z ₅		
		n259			-95.7		-112.5+Z ₅		
		n260	-99.3		-96.9	-113.8+Z ₄			
		n261	-102.3	-102.8	-101.2	-118.8+Z ₄			

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum CSI-RS $\hat{\text{E}}\text{s/lot}$, with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta\text{MB}_{\text{P},n}$ and Spherical coverage values are increased by $\Delta\text{MB}_{\text{S},n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

B.2.8.2 Conditions for L1-SINR reporting with SSB based CMR and dedicated IMR configured

B.2.8.2.1 L1-SINR reporting with SSB based CMR and dedicated ZP-IMR configured

This clause defines the following conditions for NR L1-SINR measurement reporting and corresponding procedures performed based on SSBs and ZP-IMRs: SSB_RP and SSB $\hat{\text{E}}\text{s/lot}$, applicable for a corresponding operating band.

The conditions defined in Table B.2.8.2.1-1 for FR1 NR cells.

The conditions defined in Table B.2.8.2.1-2 for FR2 NR cells.

Table B.2.8.2.1-1: Conditions for L1-SINR measurements with SSB based CMR and ZP-IMR in FR1

Parameter	NR operating band groups Note1	Minimum SSB RP		SSB $\hat{\text{E}}\text{s/lot}$
		dBm / SCS_{SSB}		dB
		$\text{SCS}_{\text{SSB}} = 15 \text{ kHz}$	$\text{SCS}_{\text{SSB}} = 30 \text{ kHz}$	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-121	≥ -3
	NR_FDD_FR1_B	-123.5	-120.5	
	NR_TDD_FR1_C	-123	-120	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	
	NR_FDD_FR1_F	-121.5	-118.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-118	
	NR_FDD_FR1_H	-120.5	-117.5	

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.8.2.1-2: Conditions for L1-SINR measurements with SSB based CMR and ZP-IMR in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3		SSB $\hat{\text{E}}\text{s/lot}$
			dBm / SCS _{SSB}		dB
			SCS _{SSB} = 120 kHz		
			UE Power class		
			SCS _{SSB} = 240 kHz		
			UE Power class		

			1	2	3	4	5	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-107.3	-110.8	-109.1	-124.8+Y ₄	-120.4+Y ₅	(Value for SCS _{SSB} = 120 kHz) +3dB	≥-3
		n258	-107.3	-110.8	-109.1	-124.8+Y ₄	-120.6+Y ₅		
		n259			-105.5		-117.5+Y ₅		
		n260	-104.3		-106.5	-122.8+Y ₄			
		n261	-107.3	-110.8	-109.1	-124.8+Y ₄			
	Spherical coverage Note 1	n257	-99.3	-99.8	-98.2	-115.8+Z ₄	-112.4+Z ₅	(Value for SCS _{SSB} = 120 kHz) +3dB	≥-3
		n258	-99.3	-99.8	-98.2	-115.8+Z ₄	-112.6+Z ₅		
		n259			-92.7		-109.5+Z ₅		
		n260	-96.3		-93.9	-110.8+Z ₄			
		n261	-99.3	-99.8	-98.2	-115.8+Z ₄			

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum SSB Ês/lot, with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΔMB_{P,n} and Spherical coverage values are increased by ΔMB_{S,n}, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

B.2.8.2.2 L1-SINR reporting with SSB based CMR and dedicated NZP-IMR configured

This clause defines the following conditions for NR L1-SINR measurement reporting and corresponding procedures performed based on SSBs and NZP-IMRs: SSB_{RP}, SSB Ês/lot and NZP-IMR Ês/lot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.8.2.2-1 for FR1 NR cells.

The conditions are defined in Table B.2.8.2.2-2 for FR2 NR cells.

Table B.2.8.2.2-1: Conditions for L1-SINR measurements with SSB based CMR and NZP-IMR in FR1

Parameter	NR operating band groups Note1	Minimum SSB _{RP} dBm / SCS _{SSB}		SSB Ês/lot dB	NZP-IMR Ês/lot dB
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz		
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	≥ 0	≥ 0
	NR_FDD_FR1_B	-120.5	-117.5		
	NR_TDD_FR1_C	-120	-117		
	NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5		
	NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116		
	NR_FDD_FR1_F	-118.5	-115.5		
	NR_FDD_FR1_G, NR_TDD_FR1_G	-118	-115		
	NR_FDD_FR1_H	-117.5	-114.5		

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.8.2.2-2: Conditions for L1-SINR measurements with SSB based CMR and NZP-IMR in FR2

Parameter	Angle of arrival	NR operating bands	Minimum SSB_RP Note 2, Note 3						SSB Ês/lot	NZP-IMR Ês/lot
			dBm / SCS _{SSB}						dB	dB
			SCS _{SSB} = 120 kHz				SCS _{SSB} = 240 kHz			
			UE Power class				UE Power class			
			1	2	3	4	5	1, 2, 3, 4, 5		
Conditions	Rx Beam Peak	n257	-104.3	-107.8	-106.1	-121.8+Y ₄	-117.4+Y ₅	(Value for SCS _{SSB} = 120 kHz) +3dB	≥0	≥0
		n258	-104.3	-107.8	-106.1	-121.8+Y ₄	-117.6+Y ₅			
		n259			-102.5		-114.5+Y ₅			
		n260	-101.3		-103.5	-119.8+Y ₄				
		n261	-104.3	-107.8	-106.1	-121.8+Y ₄				
		n257	-96.3	-96.8	-95.2	-112.8+Z ₄	-109.4+Z ₅	≥0	≥0	

Spherical coverage Note 1	n258	-96.3	-96.8	-95.2	-112.8+Z ₄	-109.6+Z ₅	(Value for SCS _{SSB} = 120 kHz) +3dB		
	n259			-88.7		-106.5+Z ₅			
	n260	-93.3		-90.9	-107.8+Z ₄				
	n261	-96.3	-96.8	-95.2	-112.8+Z ₄				

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum SSB $\hat{E}_s/\text{lot}$, with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta\text{MB}_{P,n}$ and Spherical coverage values are increased by $\Delta\text{MB}_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.8.2.2-2:

- The value of Y for power classes 4 and 5 is FFS, where Y₄ and Y₅ are the rough/fine beam gain differences in Rx beam peak direction for power classes 4 and 5 respectively

- The value of Z for power classes 4 and 5 is FFS, where Z₄ and Z₅ are the rough/fine beam gain differences in spherical coverage directions for power classes 4 and 5 respectively

B.2.8.3 Conditions for L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured

B.2.8.3.1 L1-SINR reporting with CSI-RS based CMR and dedicated ZP-IMR configured

This clause defines the following conditions for NR L1-SINR measurement reporting and corresponding procedures performed based on CSI-RSs and ZP-IMRs: CSI-RS_{RP} and CSI-RS $\hat{E}_s/\text{lot}$, applicable for a corresponding operating band.

The conditions defined in Table B.2.8.3.1-1 for FR1 NR cells.

The conditions defined in Table B.2.8.3.1-2 for FR2 NR cells.

Table B.2.8.3.1-1: Conditions for L1-SINR measurements with CSI-RS based CMR and ZP-IMR in FR1

Parameter	NR operating band groups ^{Note1}	Minimum CSI-RS_RP			CSI-RS Ês/lot
		dBm / SCS _{CSI-RS}			dB
		SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-124	-121	-118	≥ -3
	NR_FDD_FR1_B	-123.5	-120.5	-117.5	
	NR_TDD_FR1_C	-123	-120	-117	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-122.5	-119.5	-116.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-122	-119	-116	
	NR_FDD_FR1_F	-121.5	-118.5	-115.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-121	-118	-115	
	NR_FDD_FR1_H	-120.5	-117.5	-114.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.					

Table B.2.8.3.1-2: Conditions for L1-SINR measurements with CSI-RS based CMR and ZP-IMR in FR2

Parameter	Angle of arrival	NR operating bands	Minimum CSI-RS _{RP} Note 2, Note 3 dBm / SCS _{CSI-RS}					CSI-RS $\hat{E}_s/\text{lot}$
								dB
			SCS _{CSI-RS} = 60 kHz				SCS _{CSI-RS} = 120 kHz	
			UE Power class				UE Power class	
Conditions	Rx Beam Peak	n257	1	2	3	4	5	(Value for SCS _{CSI-RS} = 60 kHz) +3dB
		n258	-110.3	-113.8	-112.1	-127.8+Y ₄	-123.4+Y ₅	
		n259	-110.3	-113.8	-112.1	-127.8+Y ₄	-123.6+Y ₅	
					-108.5		-120.5+Y ₅	

Spherical coverage Note 1	n260	-107.3		-109.5	-125.8+Y ₄		(Value for SCS _{CSI-RS} = 60 kHz) +3dB	≥-3
	n261	-110.3	-113.8	-112.1	-127.8+Y ₄			
	n257	-102.3	-102.8	-101.2	-118.8+Z ₄	-115.4+Z ₅		
	n258	-102.3	-102.8	-101.2	-118.8+Z ₄	-115.6+Z ₅		
	n259			-95.7		-112.5+Z ₅		
	n260	-99.3		-96.9	-113.8+Z ₄			
	n261	-102.3	-102.8	-101.2	-118.8+Z ₄			

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum CSI-RS Ês/lot, with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΔMB_{P,n} and Spherical coverage values are increased by ΔMB_{S,n}, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

B.2.8.3.2 L1-SINR reporting with CSI-RS based CMR and dedicated NZP-IMR configured

This clause defines the following conditions for NR L1-SINR measurement reporting and corresponding procedures performed based on CSI-RSs and NZP-IMRs: CSI-RS_{RP}, CSI-RS Ês/lot and NZP-IMR Ês/lot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.8.3.2-1 for FR1 NR cells.

The conditions are defined in Table B.2.8.3.2-2 for FR2 NR cells.

Table B.2.8.3.2-1: Conditions for L1-SINR measurements with CSI-RS based CMR and NZP-IMR in FR1

Parameter	NR operating band groups Note1	Minimum CSI-RS _{RP}			CSI-RS Ês/lot	NZP-IMR Ês/lot
		dBm / SCS _{SSB}			dB	dB
		SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz		
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-121	-118	-115	≥ 0	≥ 0
	NR_FDD_FR1_B	-120.5	-117.5	-114.5		
	NR_TDD_FR1_C	-120	-117	-114		
	NR_FDD_FR1_D, NR_TDD_FR1_D	-119.5	-116.5	-113.5		
	NR_FDD_FR1_E, NR_TDD_FR1_E	-119	-116	-113		
	NR_FDD_FR1_F	-118.5	-115.5	-112.5		
	NR_FDD_FR1_G, NR_TDD_FR1_G	-118	-115	-112		
	NR_FDD_FR1_H	-117.5	-114.5	-111.5		

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.8.3.2-2: Conditions for L1-SINR measurements with CSI-RS based CMR and NZP-IMR in FR2

Parameter	Angle of arrival	NR operating bands	Minimum CSI-RS_RP Note 2, Note 3						CSI-RS Ês/lot	NZP- IMR Ês/lot
			dBm / SCS _{CSI-RS}						dB	dB
			SCS _{CSI-RS} = 60 kHz					SCS _{CSI-RS} = 120 kHz		
			UE Power class					UE Power class		
			1	2	3	4	5	1, 2, 3, 4, 5		
Conditions	Rx Beam Peak	n257	-107.3	-110.8	-109.1	-124.8+Y ₄	-120.4+Y ₅	(Value for SCS _{CSI-RS} = 60 kHz) +3dB	≥0	≥0
		n258	-107.3	-110.8	-109.1	-124.8+Y ₄	-120.6+Y ₅			
		n259			-105.5		-117.5+Y ₅			
		n260	-104.3		-106.5	-122.8+Y ₄				
		n261	-107.3	-110.8	-109.1	-124.8+Y ₄				

Spherical coverage Note 1	n257	-99.3	-99.8	-98.2	-115.8+Z ₄	-112.4+Z ₅	(Value for SCS _{CSI-RS} = 60 kHz) +3dB	≥0	≥0
	n258	-99.3	-99.8	-98.2	-115.8+Z ₄	-112.6+Z ₅			
	n259			-92.7		-109.5+Z ₅			
	n260	-96.3		-93.9	-110.8+Z ₄				
	n261	-99.3	-99.8	-98.2	-115.8+Z ₄				

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum CSI-RS $\hat{E}_s/I_{ot}$, with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta MB_{P,n}$ and Spherical coverage values are increased by $\Delta MB_{S,n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.8.3.2-2:

- The value of Y for power classes 4 and 5 is FFS, where Y₄ and Y₅ are the rough/fine beam gain differences in Rx beam peak direction for power classes 4 and 5 respectively

- The value of Z for power classes 4 and 5 is FFS, where Z₄ and Z₅ are the rough/fine beam gain differences in spherical coverage directions for power classes 4 and 5 respectively

B.2.9 Conditions for NR intra-frequency measurements under CCA

This clause defines the following conditions for NR intra-frequency measurements under CCA and corresponding procedures performed based on SSBs: SSB_{RP} and SSB $\hat{E}_s/I_{ot}$, applicable for a corresponding operating band.

The conditions are defined in Table B.2.9-1 for NR cells under CCA.

Table B.2.9-1: Conditions for intra-frequency measurements under CCA

Parameter	NR operating band groups ^{Note1}	Minimum SSB _{RP}		SSB $\hat{E}_s/I_{ot}$
		dBm / SCS _{SSB}		dB
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_CCA_FR1_I	-123	-120	≥ -6
	NR_CCA_FR1_J	-122.5	-119.5	

NOTE 1: NR operating band groups are as defined in clause 3.5.2.

B.2.10 Conditions for NR inter-frequency measurements under CCA

This clause defines the following conditions for NR inter-frequency measurements and corresponding procedures performed based on SSBs: SSB_{RP} and SSB $\hat{E}_s/I_{ot}$, applicable for a corresponding operating band.

The conditions are defined in Table B.2.10-1 for NR cells under CCA.

Table B.2.10-1: Conditions for inter-frequency measurements under CCA

Parameter	NR operating band groups ^{Note1}	Minimum SSB _{RP}		SSB $\hat{E}_s/I_{ot}$
		dBm / SCS _{SSB}		dB
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_CCA_FR1_I	-121	-118	≥ -4
	NR_CCA_FR1_J	-120.5	-117.5	

NOTE 1: NR operating band groups are as defined in clause 3.5.2.

B.2.11 Conditions for NR L1-RSRP reporting under CCA

B.2.11.1 Conditions for SSB based L1-RSRP reporting

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on SSBs under CCA: SSB_{RP} and SSB $\hat{E}_s/\text{lot}$, applicable for a corresponding operating band.

The conditions are defined in Table B.2.11.1-1 for NR cells under CCA.

Table B.2.11.1-1: Conditions for SSB based L1-RSRP measurements under CCA

Parameter	NR operating band groups ^{Note1}	Minimum SSB _{RP}		SSB $\hat{E}_s/\text{lot}$
		dBm / SCS _{SSB}		dB
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_CCA_FR1_I	-120	-117	≥ -3
	NR_CCA_FR1_J	-119.5	-116.5	

NOTE 1: NR operating band groups are defined in clause 3.5.2.

B.2.12 Conditions for NR CSI-RS based intra-frequency measurements

This clause defines the following conditions for NR CSI-RS based intra-frequency measurements and corresponding procedures performed based on CSI-RS: CSI_{RP} and CSI-RS $\hat{E}_s/\text{lot}$, applicable for a corresponding operating band.

The conditions are defined in Table B.2.12-1 for FR1 NR cells.

The conditions are defined in Table B.2.12-2 for FR2 NR cells.

Table B.2.12-1: Conditions for CSI-RS based intra-frequency measurements in FR1

Parameter	NR operating band groups ^{Note1}	Minimum CSI _{RP}			CSI-RS $\hat{E}_s/\text{lot}$
		dBm / SCS _{CSI-RS}			dB
		SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	-121	≥ -6
	NR_FDD_FR1_B	-126.5	-123.5	-120.5	
	NR_TDD_FR1_C	-126	-123	-120	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	-119.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	-119	
	NR_FDD_FR1_F	-124.5	-121.5	-118.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-124	-121	-118	
	NR_FDD_FR1_H	-123.5	-120.5	-117.5	

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.12-2: Conditions for CSI-RS based intra-frequency measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum CSI_RP Note 2, Note 3					CSI-RS $\hat{E}_s/\text{lot}$
			dBm / SCS _{CSI-RS}					dB
			SCS _{CSI-RS} = 120 kHz				SCS _{CSI-RS} = 60 kHz	
			UE power class				UE power class	
			1	2	3	4	1, 2, 3, 4	
Conditions	Rx Beam Peak	n257	-110.3	-113.8	-112.1	- 127.8+Y ₄		≥-6

		n258	-110.3	-113.8	-112.1	- 127.8+Y ₄	(Value for SCS _{CSI-RS} = 120 kHz) - 3dB	
		n259			-108.5	- 124.7+Y ₄		
		n260	-107.3		-109.5	- 125.8+Y ₄		
		n261	-110.3	-113.8	-112.1	- 127.8+Y ₄		
	Spherical coverage Note 1	n257	-102.3	-102.8	-101.2	- 118.8+Z ₄	(Value for SCS _{CSI-RS} = 120 kHz) - 3dB	≥-6
		n258	-102.3	-102.8	-101.2	- 118.8+Z ₄		
		n259			-95.7	- 115.7+Z ₄		
		n260	-99.3		-96.9	- 113.8+Z ₄		
		n261	-102.3	-102.8	-101.2	- 118.8+Z ₄		

Note 1:

Note 2:

Note 3:

Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

Values specified at the Reference point to give minimum CSI-RS Ês/Iot, with no applied noise.

For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΔMB_{P,n} and spherical coverage values are increased by ΔMB_{S,n}, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Editor's notes for Table B.2.12-2:

- The value of Y for power class 4 is FFS, where Y₄ is the rough/fine beam gain difference in Rx beam peak direction for power class 4

- The value of Z for power class 4 is FFS, where Z₄ is the rough/fine beam gain difference in spherical coverage directions for power class 4

B.2.13 Conditions for NR CSI-RS based inter-frequency measurements

This clause defines the following conditions for NR CSI-RS based inter-frequency measurements and corresponding procedures performed based on CSI-RS: CSI_RP and CSI-RS Ês/Iot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.13-1 for FR1 NR cells.

The conditions are defined in Table B.2.13-2 for FR2 NR cells.

Table B.2.13-1: Conditions for CSI-RS based inter-frequency measurements in FR1

Parameter	NR operating band groups Note1	Minimum CSI_RS			CSI-RS Ês/lot
		dBm / SCS _{CSI-RS}			dB
		SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-125	-122	-119	≥ -6
	NR_FDD_FR1_B	-124.5	-121.5	-118.5	
	NR_TDD_FR1_C	-124	-121	-118	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-124.5	-120.5	-117.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-123	-120	-117	
	NR_FDD_FR1_F	-122.5	-119.5	-116.5	
	NR_FDD_FR1_G, NR_TDD_FR1_G	-122	-119	-116	
	NR_FDD_FR1_H	-121.5	-118.5	-115.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.					

Table B.2.13-2: Conditions for CSI-RS based inter-frequency measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum CSI_RP Note 2, Note 3					CSI-RS $\hat{E}_s/\text{lot}$	
			dBm / $\text{SCS}_{\text{CSI-RS}}$						dB
			$\text{SCS}_{\text{CSI-RS}} = 120 \text{ kHz}$				$\text{SCS}_{\text{CSI-RS}} = 60 \text{ kHz}$		
			UE power class				UE power class		
			1	2	3	4	1, 2, 3, 4		
Conditions	Rx Beam Peak	n257	-108.3	-111.8	-110.1	- 125.8+Y ₄	(Value for $\text{SCS}_{\text{CSI-RS}} = 120 \text{ kHz}$) - 3dB	≥-4	
		n258	-108.3	-111.8	-110.1	- 125.8+Y ₄			
		n259			-106.5	- 122.7+Y ₄			
		n260	-105.3		-107.5	- 123.8+Y ₄			
		n261	-108.3	-111.8	-110.1	- 125.8+Y ₄			
	Spherical coverage Note 1	n257	-100.3	-100.8	-99.2	- 116.8+Z ₄	(Value for $\text{SCS}_{\text{CSI-RS}} = 120 \text{ kHz}$) - 3dB	≥-4	
		n258	-100.3	-100.8	-99.2	- 116.8+Z ₄			
		n259			-93.7	- 113.7+Z ₄			
		n260	-97.3		-94.9	- 111.8+Z ₄			
		n261	-100.3	-100.8	-99.2	- 116.8+Z ₄			
NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.									
NOTE 2: Values specified at the Reference point to give minimum CSI-RS $\hat{E}_s/\text{lot}$, with no applied noise.									
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by $\Delta\text{MB}_{\text{P},n}$ and Spherical coverage values are increased by $\Delta\text{MB}_{\text{S},n}$, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].									

Editor's notes for Table B.2.13-2:

- The value of Y for power class 4 is FFS, where Y₄ is the rough/fine beam gain differences in Rx beam peak direction for power class 4

- The value of Z for power class 4 is FFS, where Z₄ is the rough/fine beam gain differences in spherical coverage directions for power class 4.

B.2.14 Conditions for NR PRS-based measurements

This clause defines the following conditions for NR PRS-based measurements and corresponding procedures performed based on PRS: PRP and PRS $\hat{E}_s/\text{lot}$, applicable for a corresponding operating band.

The conditions are defined in Table B.2.14-1 for FR1 NR cells.

The conditions are defined in Table B.2.14-2 for FR2 NR cells.

Table B.2.14-1: Conditions for NR PRS-based measurements in FR1

Parameter	NR operating band groups Note1	Minimum PRP1,2			PRS $\hat{E}_s/\text{lot}$	
		dBm / SCS_{PRS}			dB	
		$\text{SCS}_{\text{PRS}} = 15 \text{ kHz}$	$\text{SCS}_{\text{PRS}} = 30 \text{ kHz}$	$\text{SCS}_{\text{PRS}} = 60 \text{ kHz}$		
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A, NR_SDL_FR1_A	-127	-124	-121	≥ -6 Note2 ≥ -13 Note3	

	NR_FDD_FR1_B	-126.5	-123.5	-120.5	≥ -3 ^{Note4}	≥ -6 ^{Note5} ≥ -3 ^{Note6} ≥ 0 ^{Note7}
	NR_TDD_FR1_C	-126	-123	-120		
	NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	-119.5		
	NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	-119		
	NR_FDD_FR1_F	-124.5	-121.5	-118.5		
	NR_FDD_FR1_G, NR_TDD_FR1_G	-124	-121	-118		
	NR_FDD_FR1_H	-123.5	-120.5	-117.5		
NOTE 1: NR operating band groups are defined in clause 3.5.2.						
NOTE 2: PRS $\hat{E}$ s/lot for RSTD measurement reference cell PRS resource.						
NOTE 3: PRS $\hat{E}$ s/lot for RSTD measurement neighbor cell PRS resource, PRS-RSRP measurement, PRS-RSRPP measurement and UE Rx-Tx time difference measurement.						
NOTE 4: PRS $\hat{E}$ s/lot for PRS-RSRP measurement, PRS-RSRPP measurement and UE Rx-Tx time difference measurement.						
NOTE 5: PRS $\hat{E}$ s/lot for RSTD measurement neighbor cell PRS resource, PRS-RSRP measurement, PRS-RSRPP measurement and UE Rx-Tx time difference measurement when performed with reduced number of samples.						
NOTE 6: PRS $\hat{E}$ s/lot for RSTD measurement reference cell PRS resource when performed with reduced number of samples.						
NOTE 7: PRS $\hat{E}$ s/lot for PRS-RSRP measurement, PRS-RSRPP measurement and UE Rx-Tx time difference measurement when performed with reduced number of samples.						

Table B.2.14-2: Conditions for NR PRS-based measurements in FR2

Parameter	Angle of arrival	NR operating bands	Minimum PRP1,2 ^{Note 2, Note 3} dBm / SCS _{PRS}					PRS Ês/lot		
			SCS _{PRS} = 120 kHz					SCS _{PRS} = 60 kHz	dB	
			UE power class					UE power class		
			1	2	3	4	5	1, 2, 3, 4		
Conditions	Rx Beam Peak	n257	-110.3	-	-	-	-	(Value for SCS _{PRS} = 120 kHz) - 3dB	≥ -6 ^{Note4} ≥ -13 ^{Note5} ≥ -3 ^{Note6}	≥ -6 ^{Note7} ≥ -3 ^{Note8} ≥ 0 ^{Note9}
		n258	-110.3	-	-	-	-			
		n259			-	-	-			
		n260	-107.3		-	-				
		n261	-110.3	-	-	-				
		n262	-105.3	-	-	-				
	Spherical coverage ^{Note 1}	n257	-102.3	-	-	-	-	(Value for SCS _{PRS} = 120 kHz) - 3dB	≥ -6 ^{Note4} ≥ -13 ^{Note5} ≥ -3 ^{Note6}	≥ -6 ^{Note7} ≥ -3 ^{Note8} ≥ 0 ^{Note9}
		n258	-102.3	-	-	-				
		n259			-95.7	-	-			
		n260	-99.3		-96.9	-				
		n261	-102.3	-	-	-				
		n262	-97.1	-94.7	-93.5	-				
NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.										
NOTE 2: Values specified at the Reference point to give minimum PRS Ês/lot, with no applied noise.										
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΔMB _{P,n} and spherical coverage values are increased by ΔMB _{S,n} , the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].										
NOTE 4: PRS Ês/lot for RSTD measurement reference cell PRS resource										

- NOTE 5: PRS $\hat{E}$ s/lot for RSTD measurement neighbor cell PRS resource, PRS-RSRP measurement, PRS-RSRPP measurement and UE Rx-Tx time difference measurement.
- NOTE 6: PRS $\hat{E}$ s/lot for PRS-RSRP measurement, PRS-RSRPP measurement and UE Rx-Tx time difference measurement.
- NOTE 7: PRS $\hat{E}$ s/lot for RSTD measurement neighbor cell PRS resource, PRS-RSRP measurement, PRS-RSRPP measurement and UE Rx-Tx time difference measurement when performed with reduced number of samples.
- NOTE 8: PRS $\hat{E}$ s/lot for RSTD measurement reference cell PRS resource when performed with reduced number of samples.
- NOTE 9: PRS $\hat{E}$ s/lot for PRS-RSRP measurement, PRS-RSRPP measurement and UE Rx-Tx time difference measurement when performed with reduced number of samples.

Editor's notes for Table B.2.14-2:

- The value of Y for power classes 4 and 5 is FFS, where Y_4 and Y_5 are the rough/fine beam gain differences in Rx beam peak direction for power classes 4 and 5 respectively

- The value of Z for power classes 4 and 5 is FFS, where Z_4 and Z_5 are the rough/fine beam gain differences in spherical coverage directions for power classes 4 and 5 respectively

B.2.15 Conditions for NR intra-frequency measurements for RedCap

This clause defines the following conditions for RedCap NR intra-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB $\hat{E}$ s/lot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.15-1 and Table B.2.15-2 for 1 Rx and 2 Rx RedCap respectively for FR1 NR cells.

The conditions are defined in Table B.2.15-3 for FR2 NR cells.

Table B.2.15-1: Conditions for intra-frequency cell re-selection in FR1 for 1Rx RedCap

Parameter	NR operating band groups ^{Note1}	Minimum SSB_RP		SSB $\hat{E}$ s/lot
		dBm / SCS _{SSB}		dB
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-127	-124	≥ -6
	NR_FDD_FR1_B	-126.5	-123.5	
	NR_TDD_FR1_C	-126	-123	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	
	NR_FDD_FR1_F	-124.5	-121.5	
	NR_FDD_FR1_G	-124	-121	
	NR_FDD_FR1_H	-123.5	-120.5	

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.15-2: Conditions for intra-frequency cell re-selection in FR1 for 2Rx RedCap

Parameter	NR operating band groups ^{Note1}	Minimum SSB_RP		SSB $\hat{E}$ s/lot
		dBm / SCS _{SSB}		dB
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR_TDD_FR1_A	-127	-124	≥ -6
	NR_FDD_FR1_B	-126.5	-123.5	
	NR_TDD_FR1_C	-126	-123	
	NR_FDD_FR1_D, NR_TDD_FR1_D	-125.5	-122.5	
	NR_FDD_FR1_E, NR_TDD_FR1_E	-125	-122	
	NR_FDD_FR1_F	-124.5	-121.5	
	NR_FDD_FR1_G	-124	-121	

	NR_FDD_FR1_H	-123.5	-120.5	
NOTE 1: NR operating band groups are defined in clause 3.5.2.				

Table B.2.15-3: Conditions for intra-frequency measurements in FR2 for RedCap

Parameter	AoA	NR opt. bands	Minimum SSB _{RP} (dBm / SCS _{SSB})							SSB Ês/lot (dB)	
			SCS _{SSB} = 120 kHz								SCS _{SSB} = 240 kHz
			UE Power class								UE Power class
			1	2	3	4	5	7	1, 2, 3, 4, 5		
Conditions	Rx Beam Peak	n257	-110.3	-113.8	-112.1	-127.8 +Y ₄	-123.4 +Y ₅	-116.1 +Y ₇	(Value for SCS _{SSB} = 120 kHz) +3dB	≥-6	
		n258	-110.3	-113.8	-112.1	-127.8 +Y ₄	-123.6 +Y ₅	-116.1 +Y ₇			
		n261	-110.3	-113.8	-112.1	-127.8 +Y ₄		-116.1 +Y ₇			
	Sph. cov. Note 1	n257	-102.3	-102.8	-101.2	-118.8 +Z ₄	-115.4 +Z ₅	-105.2 +Z ₇	(Value for SCS _{SSB} = 120 kHz) +3dB	≥-6	
		n258	-102.3	-102.8	-101.2	-118.8 +Z ₄	-115.6 +Z ₅	-105.2 +Z ₇			
		n261	-102.3	-102.8	-101.2	-118.8 +Z ₄		-105.2 +Z ₇			
Note 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.											
Note 2: Values specified at the Reference point to give minimum SSB Ês/lot, with no applied noise.											
Note 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΔMB _{P,n} and Spherical coverage values are increased by ΔMB _{S,n} , the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].											

Editor's notes for Table B.2.2-2:

- The value of Y for power classes 4, 5 and 7 is FFS, where Y₄, Y₅ and Y₇ are the rough/fine beam gain differences in Rx beam peak direction for power classes 4, 5 and 7 respectively
- The value of Z for power classes 4, 5 and 7 is FFS, where Z₄, Z₅ and Z₇ are the rough/fine beam gain differences in spherical coverage directions for power classes 4, 5 and 7 respectively

B.2.16 Conditions for NR inter-frequency measurements for RedCap

This clause defines the following conditions for RedCap NR inter-frequency measurements and corresponding procedures performed based on SSBs: SSB_{RP} and SSB Ês/lot, applicable for a corresponding operating band.

The conditions are defined in Table B.2.16-1 and Table B.2.16-2 for 1 Rx and 2 Rx RedCap for FR1 NR cells.

The conditions are defined in Table B.2.16-3 for FR2 NR cells.

Table B.2.16-1: Conditions for inter-frequency measurements in FR1 for 1 Rx RedCap

Parameter	NR operating band groups ^{Note1}	Minimum SSB_RP		SSB Ês/lot dB
		dBm / SCS _{SSB}		
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_FR1_A, NR TDD FR1_A	-125	-122	≥ -4
	NR FDD FR1 B	-124.5	-121.5	
	NR TDD FR1 C	-124	-121	
	NR_FDD_FR1_D, NR TDD FR1_D	-124.5	-120.5	

NR_FDD_FR1_E, NR_TDD_FR1_E	-123	-120
NR_FDD_FR1_F	-122.5	-119.5
NR_FDD_FR1_G	-122	-119
NR_FDD_FR1_H	-121.5	-118.5

NOTE 1: NR operating band groups are defined in clause 3.5.2.

Table B.2.16-2: Conditions for inter-frequency measurements in FR1 for 2 Rx RedCap

Parameter	AoA	NR opt. bands	Minimum SSB _{RP} Note 2, Note 3 (dBm / SCS _{SSB})							SSB Ês/lot (dB)
			SCS _{SSB} = 120 kHz						SCS _{SSB} = 240 kHz	
			UE Power class						UE Power class	
			1	2	3	4	5	7	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-126.3 +Y ₁	-111.8	-110.1	-125.8 +Y ₄	-121.4 +Y ₅	-114.1 +Y ₇	(Value for SCS _{SSB} = 120 kHz) +3dB	≥-4
		n258	-126.3 +Y ₁	-111.8	-110.1	-125.8 +Y ₄	-121.6 +Y ₅	-114.1 +Y ₇		
		n261	-126.3 +Y ₁	-111.8	-110.1	-125.8 +Y ₄		-114.1 +Y ₇		
	Sph. cov. Note 1	n257	-118.3 +Z ₁	-100.8	-99.2	-116.8 +Z ₄	-113.4 +Z ₅	-103.2 +Z ₇	(Value for SCS _{SSB} = 120 kHz) +3dB	≥-4
		n258	-118.3 +Z ₁	-100.8	-99.2	-116.8 +Z ₄	-113.6 +Z ₅	-103.2 +Z ₇		
		n261	-118.3 +Z ₁	-100.8	-99.2	-116.8 +Z ₄		-103.2 +Z ₇		

NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.

NOTE 2: Values specified at the Reference point to give minimum SSB Ês/lot, with no applied noise.

NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΔMB_{P,n} and Spherical coverage values are increased by ΔMB_{S,n}, the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].

Table B.2.16-3: Conditions for inter-frequency measurements in FR2 for RedCap

Parameter	Angle of arrival	NR operating bands	Minimum SSB _{RP} Note 2, Note 3							SSB Ês/lot
			dBm / SCS _{SSB}							dB
			SCS _{SSB} = 120 kHz						SCS _{SSB} = 240 kHz	
			UE Power class						UE Power class	
			1	2	3	4	5	7	1, 2, 3, 4, 5	
Conditions	Rx Beam Peak	n257	-108.3	-111.8	-110.1	-125.8+Y ₄	-121.4+Y ₅	-114.1 +Y ₇	(Value for SCS _{SSB} = 120 kHz) +3dB	≥-4
		n258	-108.3	-111.8	-110.1	-125.8+Y ₄	-121.6+Y ₅	-114.1 +Y ₇		
		n261	-108.3	-111.8	-110.1	-125.8+Y ₄		-114.1 +Y ₇		

Spherical coverage Note 1	n257	-100.3	- 100.8	-99.2	- 116.8+Z ₄	- 113.4+Z ₅	- 103.2 +Z ₇	(Value for SCS _{SSB} = 120 kHz) +3dB	≥-4
	n258	-100.3	- 100.8	-99.2	- 116.8+Z ₄	- 113.6+Z ₅	- 103.2 +Z ₇		
	n261	-100.3	- 100.8	-99.2	- 116.8+Z ₄		- 103.2 +Z ₇		
NOTE 1: Values based on EIS spherical coverage as defined in clause 7.3.4 of TS 38.101-2 [19]. Side condition applies for directions in which EIS spherical coverage requirement is met.									
NOTE 2: Values specified at the Reference point to give minimum SSB Ês/lot, with no applied noise.									
NOTE 3: For UEs that support multiple FR2 bands, Rx Beam Peak values are increased by ΔMB _{P,n} and Spherical coverage values are increased by ΔMB _{S,n} , the UE multi-band relaxation factor in dB specified in clause 6.2.1 of TS 38.101-2 [19].									

Editor's notes for Table B.2.3-2:

- The value of Y for power classes 4, 5 and 7 is FFS, where Y₄, Y₅ and Y₇ are the rough/fine beam gain differences in Rx beam peak direction for power classes 4, 5 and 7 respectively
- The value of Z for power classes 4, 5 and 7 is FFS, where Z₄, Z₅ and Z₇ are the rough/fine beam gain differences in spherical coverage directions for power classes 4, 5 and 7 respectively

B.2.17 Conditions for NR intra-frequency measurements for satellite access

This clause defines the following conditions for NR intra-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/lot, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.2.17-1 for FR1 NR cells.

Table B.2.17-1: Conditions for intra-frequency measurements in FR1 for satellite access

Parameter	NR operating band groups ^{Note1}	Minimum SSB_RP		SSB Ês/lot
		dBm / SCS _{SSB}		dB
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_SAB_FR1_A	-127	-124	≥ -6
NOTE 1: NR operating band groups for satellite access are defined in clause 3.5.2A.				

B.2.18 Conditions for NR inter-frequency measurements for satellite access

This clause defines the following conditions for NR inter-frequency measurements and corresponding procedures performed based on SSBs: SSB_RP and SSB Ês/lot, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.2.18-1 for FR1 NR cells.

Table B.2.18-1: Conditions for inter-frequency measurements in FR1 for satellite access

Parameter	NR operating band groups ^{Note1}	Minimum SSB_RP		SSB Ês/lot
		dBm / SCS _{SSB}		dB
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_SAB_FR1_A	-125	-122	≥ -4
NOTE 1: NR operating band groups for satellite access are defined in clause 3.5.2A.				

B.2.19 Conditions for NR L1-RSRP reporting for satellite access

B.2.19.1 Conditions for SSB based L1-RSRP reporting for satellite access

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on SSBs: SSB_RP and SSB $\hat{E}_s/\text{lot}$, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.2.19.1-1 for FR1 NR cells.

Table B.2.19.1-1: Conditions for SSB based L1-RSRP measurements in FR1 for satellite access

Parameter	NR operating band groups ^{Note1}	Minimum SSB_RP		SSB Ês/lot dB
		dBm / SCS _{SSB}		
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_SAB_FR1_A	-124	-121	≥ -3
NOTE 1: NR operating band groups for satellite access are defined in clause 3.5.2A.				

B.2.19.2 Conditions for CSI-RS based L1-RSRP reporting for satellite access

This clause defines the following conditions for NR L1-RSRP measurement reporting and corresponding procedures performed based on CSI-RS: CSI-RS_RP and CSI-RS $\hat{E}_s/\text{lot}$, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.2.19.2-1 for FR1 NR cells.

Table B.2.19.2-1: Conditions for CSI-RS based L1-RSRP measurements in FR1 for satellite access

Parameter	NR operating band groups Note1	Minimum CSI-RS_RP			CSI-RS Es/Iot dB
		dBm / SCS _{CSI-RS}			
		SCS _{CSI-RS} = 15 kHz	SCS _{CSI-RS} = 30 kHz	SCS _{CSI-RS} = 60 kHz	
Conditions	NR_FDD_SAB_FR1_A	-124	-121	-118	≥ -3
NOTE 1: NR operating band groups for satellite access are defined in clause 3.5.2A.					

B.2.20 Conditions for RRC connection release with redirection to NR for satellite access

This clause defines the following conditions for RRC connection release with redirection to NR: SSB_RP and SSB $\hat{E}_s/\text{lot}$, applicable for a corresponding operating band for satellite access.

The conditions are defined in Table B.2.20-1 for FR1 NR cells.

Table B.2.20-1: Conditions for for RRC connection release with redirection to NR in FR1 for satellite access

Parameter	NR operating band groups ^{Note1}	Minimum SSB_RP		SSB Ês/lot
		dBm / SCS _{SSB}		dB
		SCS _{SSB} = 15 kHz	SCS _{SSB} = 30 kHz	
Conditions	NR_FDD_SAB_FR1_A	-125	-122	≥ -4
NOTE 1: NR operating band groups for satellite access are defined in clause 3.5.2A.				

B.3 RRM Requirements Exceptions

B.3.1 Introduction

Annex B.3 covers exceptions for side conditions based on receiver sensitivity for CA, DC, and SUL.

B.3.2 Receiver sensitivity relaxation for CA

B.3.2.1 Receiver sensitivity relaxation for UE supporting CA in FR1

For a UE supporting inter-band carrier aggregation configuration with uplink in NR band, if there is a relaxation of receiver sensitivity $\Delta R_{IB,c} > 0$ dB as defined in clause 7.3A.3 of TS 38.101-1 [18], the relevant side conditions specifying received power levels (SSB_RP and Io) shall be increased by the amount $\Delta = \Delta R_{IB,c}$ defined for the corresponding downlink NR bands.

For a UE supporting CA configuration in FR1, the requirement in this clause applies for both SC and CA operation.

B.3.2.2 Receiver sensitivity relaxation for UE configured with CA in FR1

B.3.2.2.1 Inter-band carrier aggregation

For a UE configured with inter-band carrier aggregation with active uplink in NR band, if there is a relaxation of receiver sensitivity $\Delta R_{IB,c} > 0$ dB as defined in clause 7.3A.3 of TS 38.101-1 [18], the relevant side conditions specifying received power levels (SSB_RP and Io) shall be increased by the amount $\Delta = \Delta R_{IB,c}$ defined for the corresponding downlink NR bands.

If the relaxation Δ specified in this clause applies, then the relaxation specified in clause B.3.2.1 should not be applied.

B.3.2.2.2 Reference sensitivity exceptions due to UL harmonic interference for CA

In this clause, requirements exceptions are described for the UE configured with a band in FR1 when it is impacted by UL harmonic interference from another band in FR1 of the same CA configuration.

A relevant side condition (SSB_RP and Io) in a requirement shall be increased by the amount $\Delta = L2 - L1$, where L1 is the reference sensitivity level specified in clause 7.3.2 of TS 38.101-1 [18], and L2 is the reference sensitivity level based on the requirements in clause 7.3A.4 of TS 38.101-1 [18], when the following conditions are fulfilled,

- corresponding downlink component carriers on different NR bands are configured with CA and active,
- the uplink is configured in the NR low operating band and is active,
- the uplink configuration is as specified in clause 7.3A.4 of TS 38.101-1 [18], and
- the exception requirements specified in clause 7.3A.4 of TS 38.101-1 [18] apply.

If the relaxation Δ specified in this clause applies, then the relaxation specified in clause B.3.2.1 should not be applied.

B.3.2.2.3 Reference sensitivity exceptions due to intermodulation interference due to 2UL CA

In this clause, requirements exceptions are described for the UE with an inter-band carrier aggregation with uplink assigned to two NR bands.

A relevant side condition (SSB_RP and Io) in a requirement shall be increased by the amount $\Delta = L2 - L1$, where L1 is the reference sensitivity level specified in clause 7.3.2 of TS 38.101-1 [18], and L2 is the reference sensitivity level based on the requirements in clause 7.3A.5 of TS 38.101-1 [18], when the following conditions are fulfilled,

- corresponding downlink component carriers on different bands are configured with CA and active,
- uplinks are assigned to two NR bands,
- the exception requirements specified in clause 7.3A.5 of TS 38.101-1 [18] apply.

If the relaxation Δ specified in this clause applies, then the relaxation specified in clause B.3.2.1 should not be applied.

B.3.2.3 Receiver sensitivity relaxation for UE supporting CA in FR2

B.3.2.4 Receiver sensitivity relaxation for UE configured with CA in FR2

B.3.2.4.1 Intra-band contiguous carrier aggregation

For a UE configured with intra-band contiguous carrier aggregation in NR band in FR2, if there is a relaxation of receiver sensitivity $\Delta R_{IB} > 0$ dB as defined in clause 7.3A.2.1 of TS 38.101-2 [19] depending on the aggregated channel bandwidth, the relevant side conditions specifying received power levels (SSB_RP and Io) shall be increased by the amount $\Delta = \Delta R_{IB}$ defined for the corresponding downlink NR bands.

B.3.2.4.2 Intra-band non-contiguous carrier aggregation

For a UE configured with intra-band non-contiguous carrier aggregation in NR band in FR2, if there is a relaxation of receiver sensitivity $\Delta R_{IB} > 0$ dB as defined in clause 7.3A.2.1 of TS 38.101-2 [19] depending on the aggregated channel bandwidth, the relevant side conditions specifying received power levels (SSB_RP and Io) shall be increased by the amount $\Delta = \Delta R_{IB}$ defined for the corresponding downlink NR bands.

B.3.3 Receiver sensitivity relaxation for DC

B.3.3.1 Receiver sensitivity relaxation for EN-DC

Editor's note: TBD

B.3.3.2 Receiver sensitivity relaxation for NE-DC

Editor's note: TBD

B.3.4 Receiver sensitivity relaxation for SUL

B.3.4.1 Receiver sensitivity relaxation for UE supporting SUL in FR1

For a UE supporting a SUL configuration in FR1, if there is a relaxation of receiver sensitivity $\Delta R_{IB,c} > 0$ dB as defined in clause 7.3C.3 of TS 38.101-1 [18], the relevant side conditions specifying received power levels (SSB_RP and Io) shall be increased by the amount $\Delta = \Delta R_{IB,c}$ defined for the corresponding downlink NR bands.

For a UE supporting a SUL configuration in FR1, the requirement in this clause applies for both SC and SUL operation.

B.3.4.2 Receiver sensitivity relaxation for UE configured with SUL in FR1

B.3.4.2.1 Reference sensitivity exceptions due to UL harmonic interference for SUL

In this clause, requirements exceptions are described for the UE with a band in FR1 when it is impacted by UL harmonic interference from another band in FR1 of the same SUL configuration.

A relevant side condition (SSB_RP and Io) in a requirement shall be increased by the amount $\Delta = L2 - L1$, where L1 is the reference sensitivity level specified in clause 7.3.2 of TS 38.101-1 [18], and L2 is the reference sensitivity level based on the requirements in clause 7.3C.2 of TS 38.101-1 [18], when the following conditions are fulfilled,

- a downlink component carrier is configured in NR band and is active,
- the uplink is configured in the NR low operating band and is active,
- the uplink configuration is as specified in clause 7.3C.2 of TS 38.101-1 [18], and
- the exception requirements specified in clause 7.3C.2 of TS 38.101-1 [18] apply.

If the relaxation Δ specified in this clause applies, then the relaxation specified in clause B.3.4.1 should not be applied.

B.4 Conditions for V2X

B.4.1 Test parameters for GNSS signals

This clause defines the reference signal power levels of generated satellites for a corresponding GNSS, which will be used in V2X test cases.

Table B.4.1-1: GNSS Reference Signal Power Parameters

System	Parameters	Unit	Value
	Number of generated satellites per system	-	6
GPS ⁽¹⁾	Reference signal power level for all satellites	dBm	-128.5
Galileo	Reference signal power level for all satellites	dBm	-127
GLONASS	Reference signal power level for all satellites	dBm	-131
BDS	Reference signal power level for all satellites	dBm	-133
NOTE 1: "GPS" here means GPS L1 C/A, Modernized GPS, or both, dependent on UE capabilities.			
NOTE 2: The DUT UE does not need to support all systems. The DUT UE shall support at least one system and will be test for the supported systems.			

B.4.2 Conditions for PSBCH-RSRP Accuracy Requirements

This clause defines the following conditions for PSBCH-RSRP measurement accuracy requirements applicable for a corresponding operating band.

The conditions are defined in Table B.4.2-1 for FR1.

Table B.4.2-1: Conditions for PSBCH-RSRP measurements in FR1

Parameter	NR V2X operating band groups ^{Note1}	Minimum S-SSB_RP			S-SSB Ês/lot
		dBm/SCS _{S-SSB}			dB
		SCS _{S-SSB} = 15kHz	SCS _{S-SSB} = 30kHz	SCS _{S-SSB} = 60kHz	
	NR_TDD_FR1_B	-126.5	-123.5	-120.5	≥ -6
	NR_TDD_FR1_J	-122.5	-119.5	-116.5	
NOTE 1: NR V2X operating band groups are as defined in Section 3.5 for the corresponding NR operating bands.					

B.4.3 Conditions for Selection/Reselection to Intra-frequency SyncRef UE

This clause defines the S-SSB_{RP} and S-SSB $\hat{E}_s/I_{ot}$ applicable for a corresponding operating band.

The conditions for selection/reselection to intra-frequency SyncRef UE are defined in Table B.4.3-1 for FR1.

Table B.4.3-1: V2X synchronization measurements in FR1

Parameter	NR V2X operating band groups ^{Note1}	Minimum S-SSB _{RP}			S-SSB $\hat{E}_s/I_{ot}$
		dBm/SCS _{S-SSB}			dB
		SCS _{S-SSB} = 15kHz	SCS _{S-SSB} = 30kHz	SCS _{S-SSB} = 60kHz	
	NR_TDD_FR1_B	-120.5	-117.5	-114.5	≥ 0
	NR_TDD_FR1_J	-116.5	-113.5	-110.5	≥ 0
NOTE 1: NR V2X operating band groups are as defined in Section 3.5 for the corresponding NR operating bands.					
NOTE 2: The SyncRef UE transmission frequency shall be accurate to within ± 5 PPM compared to the absolute frequency.					

B.4.4 Conditions for L1 SL-RSRP Accuracy Requirements

This clause defines the following conditions for L1 SL-RSRP measurement accuracy requirements applicable for a corresponding operating band.

The conditions are defined in Table B.4.4-1 for FR1.

Table B.4.4-1: Conditions for L1 SL-RSRP measurements in FR1

Parameter	NR V2X operating band groups ^{Note1}	Minimum L1 SL-RSRP			Ês/lot
		dBm/SCS			dB
		SCS= 15kHz	SCS= 30kHz	SCS = 60kHz	
	NR_TDD_FR1_B	-120.5	-117.5	-114.5	≥ 0
	NR_TDD_FR1_J	-116.5	-113.5	-110.5	

NOTE 1: NR V2X operating band groups are as defined in Section 3.5 for the corresponding NR operating bands.
 NOTE 2: The parameter Ês/lot is the Ês/lot of PSCCH-DMRS and/or PSSCH-DMRS.
 NOTE 3: The SCS is for PSCCH and/or PSSCH.

B.5 High level test procedure for SAN RRM tests

The following high level steps are conducted for test cases for SAN defined in clause A.14.

- A set of ephemeris information are pre-defined for each satellite corresponding to respective epoch times in TS 38.508-1 [37].
- The same ephemeris information will be maintained during the test (constant ephemerisInfo in all SIB19 updates), i.e. SAN RRM test cases are defined with fixed constant Delay and Doppler shift from Satellite access node to UE unless otherwise stated.
- The range from which the constant Delay is selected is as follows:
 - For GSO an altitude of 35,786km is considered. The range of the one-way delay between UE and satellite is from 119.375ms to 128.79ms.
 - For NGSO an altitude of 600km and 1200km on a circular orbit are considered. The range of the one-way delay between UE and satellite is from 2ms (lowest value for LEO orbit 600km) to 6.67ms (highest value for LEO orbit 1200km).
- The constant Doppler shift (i.e. frequency offset) is derived from the same ephemeris (i.e. orbit emulation) as the Delay.
- UE location is determined for the test. The ephemeris and the UE location should be designed such that elevation angle relative to the UE position shall not be smaller than 30 deg during entire test time.
- Test equipment adjusts the time and frequency of transmission according to the pre-defined ephemeris (constant in all SIB19 updates) and UE location.

Annex C (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2017-05	RAN4#83	R4-1706324				Specification skeleton	0.0.1
2017-09						Email approved	0.1.0
2017-09	RAN4-NR AH #3	R4-1709413				Capture TPs approved in the meeting	0.2.0
2017-10	RAN4#84 -Bis	R4-1711985				Capture TPs approved in the meeting	0.3.0
2017-12	RAN4#85	R4-1714546				Capture TPs approved in RAN4#85	0.4.0
2017-12	RAN#78	RP-172407				v1.0.0 submitted for plenary approval	1.0.0
2017-12	RAN#78					Approved by plenary – Rel-15 spec under change control	15.0.0
2018-03	RAN#79	RP-180264	0032		B	CR to TS38.133	15.1.0
2018-06	RAN#80	RP-181075	0037		B	CR to TS 38.133: Implementation of endorsed draft CRs from RAN4 #86bis and RAN4 #87	15.2.0
2018-09	RAN#81	RP-181896	0043		B	CR to TS 38.133: Implementation of endorsed draft CRs from RAN4-AH-1807 and RAN4 #88	15.3.0
2018-12	RAN#82	RP-182763	0057	3	B	CR to TS 38.133: Implementation of endorsed draft CRs from RAN4-88bis and RAN4-89	15.4.0
2019-03	RAN#83	RP-190569	0064	1	B	CR to TS 38.133: Implementation of endorsed draft CRs from RAN4#90	15.5.0
2019-06	RAN#84	RP-191240	0072	1	F	CR to TS 38.133: Implementation of endorsed draft CRs from RAN4#90bis and RAN4#91	15.6.0
2019-06	RAN#84	RP-191248	0066		B	Introduction of band n48	16.0.0
2019-06	RAN#84	RP-191242	0067		B	Introduction of band n14 - CR to TS 38.133	16.0.0
2019-06	RAN#84	RP-191246	0068		B	Introduction of band n30 - CR to TS 38.133	16.0.0
2019-06	RAN#84	RP-191244	0069		B	introduce n18 into TS38.133	16.0.0
2019-06	RAN#84	RP-191250	0070	1	B	n65 introduction to 38.133	16.0.0
2019-09	RAN#85	RP-192034	0077		B	n29 introduction to 38.133	16.1.0
2019-09	RAN#85	RP-192022	0085		A	CR to TS 38.133: Implementation of endorsed draft CRs from RAN4#92 (Rel-16) - Mirrors changes in R4-1910356 for Rel-15 TS 38.133	16.1.0
2019-12	RAN#86	RP-192997	0093		A	Specification of UE antenna gain range	16.2.0
2019-12	RAN#86	RP-192992	0095	1	A	Add RRM Test case setup for 1 AoA in Rx beam peak and 1 in non Rx beam peak	16.2.0
2019-12	RAN#86	RP-192997	0097		A	Update of Parameters, Test case A.7.7.1.1 FR2 Intra-frequency SS-RSRP accuracy	16.2.0
2019-12	RAN#86	RP-192997	0099		A	Update of Parameters, Test case A.5.7.1.1 FR2 Intra-frequency SS-RSRP accuracy	16.2.0
2019-12	RAN#86	RP-192997	0101		A	Update of Parameters, Test case A.7.7.1.2 FR2 Inter-frequency SS-RSRP accuracy	16.2.0
2019-12	RAN#86	RP-192997	0103		A	Update of Parameters, Test case A.5.7.1.2 FR2 Inter-frequency SS-RSRP accuracy	16.2.0
2019-12	RAN#86	RP-192992	0105		A	Correction to Random access test case in FR1 for PSCell in EN-DC	16.2.0
2019-12	RAN#86	RP-193040	0107		A	CR on handover 38.133 - R16	16.2.0
2019-12	RAN#86	RP-192994	0112	1	A	CR on the BWP switch test cases EN-DC FR1 (clause A.4.5.6)	16.2.0
2019-12	RAN#86	RP-192994	0113	1	A	CR on the BWP switch test cases EN-DC FR2 (clause A.5.5.6)	16.2.0
2019-12	RAN#86	RP-192994	0114	1	A	CR on the BWP switch test cases SA FR1 (clause A.6.5.6)	16.2.0
2019-12	RAN#86	RP-192994	0115	1	A	CR on the BWP switch test cases SA FR2 (clause A.7.5.6)	16.2.0
2019-12	RAN#86	RP-193042	0117		A	CR to TS38.133 on correction for BWP switching with SCS changing (Section 8.2.1.2.7, 8.2.2.2.5 and 8.6.2)	16.2.0
2019-12	RAN#86	RP-193040	0121		A	CR on handover RRM requirement (clause 6.1.1.5) (R16)	16.2.0
2019-12	RAN#86	RP-192994	0123		A	CR on test cases for EN-DC FR2 inter-frequency measurement (clause A.5.6.2) (R16)	16.2.0
2019-12	RAN#86	RP-192994	0127	1	A	CR on test cases for Redirection from NR in FR2 to NR in FR2 (clause A.7.3.2.3) (R16)	16.2.0
2019-12	RAN#86	RP-192994	0129	1	A	CR on test cases for FR2 handover (clause A.7.3.1) (R16)	16.2.0
2019-12	RAN#86	RP-193042	0131		A	CR to 38.133 on TCI state switching (Section 8.10) (R16)	16.2.0
2019-12	RAN#86	RP-193009	0133		F	CR on measurement gap applicability requirement for SRVCC	16.2.0
2019-12	RAN#86	RP-192994	0137		A	CR on TC with monitoring PDCCH not in first 3 OFDM symbols R16	16.2.0
2019-12	RAN#86	RP-193021	0139		F	CR to add n90 in the NR operating bands in FR1 (3.5.2)	16.2.0
2019-12	RAN#86	RP-193040	0148	1	A	CR on inter-RAT measurement in TS38.133 (clause 9.4.2, 9.4.3)	16.2.0
2019-12	RAN#86	RP-193042	0151		A	CR to 38.133 R16 Add the missing units to DRX cycle values (Cat A)	16.2.0

2019-12	RAN#86	RP-193005	0152	1	B	CR for Abbreviations for cross link interference (clause 3)	16.2.0
2019-12	RAN#86	RP-193005	0153	1	B	CR for cross link interference measurements (clause 9)	16.2.0
2019-12	RAN#86	RP-193041	0156		A	CR on NR MTTD and MRTD definition for R16	16.2.0
2019-12	RAN#86	RP-193042	0157	1	A	Editorial correction for SCell activation and deactivation delay	16.2.0
2019-12	RAN#86	RP-193039	0159		A	CR for SCell activation delay in FR2	16.2.0
2019-12	RAN#86	RP-193040	0161		A	CR for scheduling restriction due to L1-RSRP measurement	16.2.0
2019-12	RAN#86	RP-192993	0167		A	CR on SSB setting for new gap and SMTC setting (Section A.3.10)	16.2.0
2019-12	RAN#86	RP-192995	0169		A	CR on TS38.133 for EN-DC SS-SINR tests with PSCell in FR1 (Section A.4.7.3)	16.2.0
2019-12	RAN#86	RP-192995	0171		A	CR on TS38.133 for SA SS-SINR tests with PCell in FR1 (Section A.6.7.3)	16.2.0
2019-12	RAN#86	RP-192993	0185		A	CR on cell-reselection test cases for NR SA FR2 R16	16.2.0
2019-12	RAN#86	RP-192995	0187		A	endorsed CR on intra-frequency measurement and reporting for EN-DC FR2 R16	16.2.0
2019-12	RAN#86	RP-192996	0189		A	endorsed CR on intra-frequency measurement and reporting for NR SA FR2 R16	16.2.0
2019-12	RAN#86	RP-192996	0191		A	endorsed CR on RLM scheduling restrictions for EN-DC FR2 R16	16.2.0
2019-12	RAN#86	RP-192996	0193		A	endorsed CR on RLM scheduling restrictions for NR SA FR2 R16	16.2.0
2019-12	RAN#86	RP-192992	0201		A	Correction to PRACH configuration index in test cases r16	16.2.0
2019-12	RAN#86	RP-193009	0205		B	CR on UMTS inter-RAT measurement requirements	16.2.0
2019-12	RAN#86	RP-193009	0206		B	CR on CSSF for SRVCC	16.2.0
2019-12	RAN#86	RP-193009	0207		B	CR on measurement capability for NR- UMTS for SRVCC	16.2.0
2019-12	RAN#86	RP-193039	0209		A	Correction on the TCI state switching (clause 8.10)	16.2.0
2019-12	RAN#86	RP-193039	0219		A	CR for 38133 editorial for clause 8.1,8.8,8.9,8.10,8.11 in Rel-16	16.2.0
2019-12	RAN#86	RP-193039	0220		A	CR for 38133 editorial for clause 8.5 in Rel-16	16.2.0
2019-12	RAN#86	RP-193039	0221		A	CR for 38133 editorial for clause 9.3 in Rel-16	16.2.0
2019-12	RAN#86	RP-193040	0222		A	CR on 38133 for removal the duplicated reference in clause 2	16.2.0
2019-12	RAN#86	RP-193040	0223		A	CR on 38133 for clause 11 in Rel-16	16.2.0
2019-12	RAN#86	RP-192994	0225	1	A	CR on TC of UE transmit timing (A.4.4.1.1, A.5.4.1.1, A.6.4.1.1, A.7.4.1.1) Rel-16	16.2.0
2019-12	RAN#86	RP-193042	0230		A	Update on requirements related to inter-band EN-DC and NE-DC synchronous requirements	16.2.0
2019-12	RAN#86	RP-193008	0231	1	B	MRTD and MTTD requirements for asynchronous NR-NR DC	16.2.0
2019-12	RAN#86	RP-192995	0233	1	A	Editorial corrections to measurement accuracy tests	16.2.0
2019-12	RAN#86	RP-192992	0235		A	Corrections to SS-RSRQ and SS-SINR OTA tests with SA	16.2.0
2019-12	RAN#86	RP-192992	0237	1	A	Corrections to SS-RSRQ and SS-SINR OTA tests with EN-DC	16.2.0
2019-12	RAN#86	RP-193042	0239	1	A	Editorial corrections to clause 9.2	16.2.0
2019-12	RAN#86	RP-193009	0240		B	Introduction of handover requirements for SRVCC in clause 6.1.2	16.2.0
2019-12	RAN#86	RP-192992	0242		A	Corrections to band applicability of measurement accuracy tests	16.2.0
2019-12	RAN#86	RP-192996	0244		A	Introduction of bandwidth limited OCNG for OTA testing	16.2.0
2019-12	RAN#86	RP-192992	0248		A	Corrections to test cases for SA FR2 inter-frequency measurement (clause A.7.6.2)	16.2.0
2019-12	RAN#86	RP-193041	0250		A	CR to 38.133 NR reporting criteria	16.2.0
2019-12	RAN#86	RP-192993	0264		A	CR on correcting CSI-RS based BFD and link recovery tests for EN-DC in FR1	16.2.0
2019-12	RAN#86	RP-192993	0266		A	CR on correcting CSI-RS based BFD and link recovery tests for SA in FR1	16.2.0
2019-12	RAN#86	RP-192993	0268		A	CR on correcting CSI-RS based BFD and link recovery tests for EN-DC in FR2	16.2.0
2019-12	RAN#86	RP-192993	0270		A	CR on correcting CSI-RS based BFD and link recovery tests for SA in FR2	16.2.0
2019-12	RAN#86	RP-193004	0274	1	B	CR on introducing L1-SINR mapping in TS38.133 R16	16.2.0
2019-12	RAN#86	RP-193040	0276		A	CR on delay uncertainty of RRC Release with redirection requirements in TS 38.133 (Cat A)	16.2.0
2019-12	RAN#86	RP-193040	0278		A	CR on known condition of PSCell addition requirement in NE-DC (Cat A)	16.2.0
2019-12	RAN#86	RP-193041	0280		A	CR on known condition of PSCell addition requirement in NR DC (Cat A)	16.2.0
2019-12	RAN#86	RP-193041	0282		A	CR on RRC Re-establishment requirements in TS 38.133 (Cat A)	16.2.0
2019-12	RAN#86	RP-193041	0284		A	CR on scope of interruption requirements of EN-DC in TS 38.133 (Cat A)	16.2.0
2019-12	RAN#86	RP-193041	0286		A	CR on scope of MTTD requirements in TS 38.133 (Cat A)	16.2.0
2019-12	RAN#86	RP-192994	0288		A	CR on SSB-based RLM test case for EN-DC FR1 (Cat A)	16.2.0
2019-12	RAN#86	RP-192994	0290		A	CR on SSB-based RLM test case for NR SA FR1 (Cat A)	16.2.0
2019-12	RAN#86	RP-193042	0292		A	Editorial CR on clause 8.2 (Cat A)	16.2.0
2019-12	RAN#86	RP-193041	0296		A	CR on NR inter-frequency identification (Cat A)	16.2.0
2019-12	RAN#86	RP-193041	0298		A	CR on NR intra-frequency measurements (Cat A)	16.2.0
2019-12	RAN#86	RP-193039	0312		A	Correction on CSSF within measurement gap (clause 9.1.5.2) (cat-A)	16.2.0
2019-12	RAN#86	RP-193041	0314		A	CR on RLM scheduling restriction (clause 8.1.7) (cat-A)	16.2.0
2019-12	RAN#86	RP-193041	0316		A	CR on SCell activation requirements (clause 8.3.2) (cat-A)	16.2.0
2019-12	RAN#86	RP-193042	0318		A	CR to add QCL definition (clause 3.6) (cat-A)	16.2.0
2019-12	RAN#86	RP-192993	0320		A	CR on power offset in TRS RMC (A.3.17) (cat-A)	16.2.0
2019-12	RAN#86	RP-192995	0322		A	CR to introduce new PDCCH RMC (A.3.1.3.2) (cat-A)	16.2.0

2019-12	RAN#86	RP-192997	0324		A	Maintenance CR for measurement accuracy (clause 10.1) (cat-A)	16.2.0
2019-12	RAN#86	RP-192996	0326		A	FR1 CSI-RS RLM test OOS/IS non-DRX for EN-DC (clause A.4.5.1) (cat-A)	16.2.0
2019-12	RAN#86	RP-192996	0328		A	FR2 CSI-RS RLM test OOS/IS non-DRX for EN-DC (clause A.4.5.1) (cat-A)	16.2.0
2019-12	RAN#86	RP-192996	0330		A	FR1 CSI-RS RLM test OOS/IS non-DRX for SA (clause A.6.5.1) (cat-A)	16.2.0
2019-12	RAN#86	RP-192996	0332		A	FR2 CSI-RS RLM test OOS/IS non-DRX for SA (clause A.6.5.1) (cat-A)	16.2.0
2019-12	RAN#86	RP-192997	0334		A	L1-RSRP delay test FR1 EN-DC (clause A.4.6.3) (cat-A)	16.2.0
2019-12	RAN#86	RP-192997	0336		A	L1-RSRP delay test FR2 EN-DC (clause A.5.6.3) (cat-A)	16.2.0
2019-12	RAN#86	RP-192997	0338		A	L1-RSRP delay test FR1 SA (clause A.6.6.4) (cat-A)	16.2.0
2019-12	RAN#86	RP-192997	0340		A	L1-RSRP delay test FR2 SA (clause A.7.6.3) (cat-A)	16.2.0
2019-12	RAN#86	RP-192996	0344		A	L1-RSRP accuracy test FR2 EN-DC (clause A.5.7.4) (cat-A)	16.2.0
2019-12	RAN#86	RP-192996	0346		A	L1-RSRP accuracy test FR2 SA (clause A.7.7.4) (cat-A)	16.2.0
2019-12	RAN#86	RP-193005	0347	1	B	CR to introduce CLI measurement accuracy requirements	16.2.0
2019-12	RAN#86	RP-193008	0348		B	CR on measurement gap interruption due to async NR-DC	16.2.0
2019-12	RAN#86	RP-193008	0349		B	CR on Interruptions at PSCell/SCell addition/release in async NR-DC	16.2.0
2019-12	RAN#86	RP-193008	0350		B	Introducing euCA related interruption requirements for EN-DC in 38.133 (clause 8.2.1)	16.2.0
2019-12	RAN#86	RP-193008	0351		B	Introducing euCA related interruption requirements for NE-DC in 38.133 (clause 8.2.3)	16.2.0
2019-12	RAN#86	RP-193008	0352	1	B	CR on direct SCell activation delay	16.2.0
2019-12	RAN#86	RP-193039	0358		A	CR 38.133 (8.3.2) Amendment of requirements depending on T_SMTC_Max	16.2.0
2019-12	RAN#86	RP-193039	0360		A	CR 38.133 (8.3.3) Correction of SCell deactivation delay	16.2.0
2019-12	RAN#86	RP-192992	0362	1	A	CR 38.133 (A.7.5.7) TCs for PSCell addition and release delay	16.2.0
2019-12	RAN#86	RP-192995	0366		A	CR to TS 38.133: New common clause with OTA related definitions for FR2 testing (Rel-16)	16.2.0
2019-12	RAN#86	RP-192995	0368		A	CR to TS 38.133: Configuration of NR FR1 cell in NR FR1-FR2 tests (Rel-16)	16.2.0
2019-12	RAN#86	RP-192995	0370		A	CR to TS 38.133: Clarifications to Antenna Configurations for FR2 (Rel-16)	16.2.0
2019-12	RAN#86	RP-192995	0372		A	CR to TS 38.133: Corrections to CORESET RMCs (Rel-16)	16.2.0
2019-12	RAN#86	RP-192995	0374		A	CR to TS 38.133: Corrections to FR2 test configurations (Rel-16)	16.2.0
2019-12	RAN#86	RP-193042	0376	1	A	Editorial updates (clause 9.4)	16.2.0
2019-12	RAN#86	RP-193039	0378		A	Correction in interruption requirements (clause 8.2)	16.2.0
2019-12	RAN#86	RP-193042	0380	1	A	Editorial updates (Annex B)	16.2.0
2019-12	RAN#86	RP-193040	0382		A	CR on 38133 for MRTD and MTTD in intra-band EN-DC	16.2.0
2019-12	RAN#86	RP-193039	0390		A	Correction to the starting point of the DRX cycle length interval	16.2.0
2019-12	RAN#86	RP-192992	0391		A	CR for MAC-CE based TCI State switch for ENDC (Section A.5.5.8)	16.2.0
2019-12	RAN#86	RP-192993	0392		A	CR for MAC-CE based TCI State switch for NR SA (Section A.7.5.7)	16.2.0
2019-12	RAN#86	RP-192993	0393		A	CR for RRC based TCI State switch for NR SA (Section A.7.5.7)	16.2.0
2019-12	RAN#86	RP-192993	0394		A	CR for RRC based TCI State switch for EN-DC (Section A.5.5.8)	16.2.0
2019-12	RAN#86	RP-192992	0395		A	CR for FR1 handover test cases (Section A.6.3.1.1, A.6.3.1.2, A.6.3.1.3)	16.2.0
2019-12	RAN#86	RP-193041	0396		A	CR on MTTD for intra-band EN-DC	16.2.0
2019-12	RAN#86	RP-193040	0398		A	CR on corrections on NR intra frequency measurement reporting requirements (Section 9.2.4)	16.2.0
2020-03	RAN#87	RP-200401	0405	1	A	[CR] handover requirements 38.133 R16 (Cat A)	16.3.0
2020-03	RAN#87	RP-200401	0412	1	A	[CR] SCell activation delay 38.133 R16 (Cat A)	16.3.0
2020-03	RAN#87	RP-200401	0417		A	Corrections to RRM Test case A.7.1.1.2	16.3.0
2020-03	RAN#87	RP-200401	0419		A	Correction to Active UL BWP for SA intra-frequency event triggered reporting with per-UE gaps	16.3.0
2020-03	RAN#87	RP-200401	0421		A	Correction to FR1-E-UTRA Inter-RAT cell re-selection test cases	16.3.0
2020-03	RAN#87	RP-200401	0423		A	Removal of Time offset between PCell and PSCell in SA RRM Test cases	16.3.0
2020-03	RAN#87	RP-200401	0425		A	Correction to SRS periodicity and Offset for UL transit timing with DRx config	16.3.0
2020-03	RAN#87	RP-200401	0427		A	Update of Test Requirements, FR2 Intra-frequency SS-RSRP accuracy Test cases	16.3.0
2020-03	RAN#87	RP-200401	0429		A	Update of Test requirements, FR2 Inter-frequency SS-RSRP accuracy Test cases	16.3.0
2020-03	RAN#87	RP-200401	0439	1	A	CR on test cases for SA FR2 inter-frequency measurement R16 (section A.7.6.2)	16.3.0
2020-03	RAN#87	RP-200401	0441		A	Editorial corrections for 38.133 Core Part R16 (Cat A)	16.3.0
2020-03	RAN#87	RP-200401	0445	1	A	Editorial corrections for 38.133 Perf Part R16 (Cat A)	16.3.0
2020-03	RAN#87	RP-200401	0454		A	Editorial correction for active TCI state switching delay	16.3.0
2020-03	RAN#87	RP-200401	0462	1	A	Corrections for BWP switch delay R16 (Cat A)	16.3.0
2020-03	RAN#87	RP-200401	0464		A	CR for reference correction on L1-RSRP measurement period (section 9.5.3)	16.3.0

2020-03	RAN#87	RP-200401	0466		A	CR for measurement restriction in FR2 across CCs (section 8.1.2.3, 8.1.3.3, 8.5.2.3, 8.5.3.3, 8.5.5.3, 8.5.6.3, 9.5.5.1, 9.5.5.2)	16.3.0
2020-03	RAN#87	RP-200401	0468		A	CR for SSB based candidate beam detection (section 8.5.5.2)	16.3.0
2020-03	RAN#87	RP-200401	0488		A	CR to TS 38.133: Corrections to FR1-FR2 event triggered test cases Annex A.5 (Rel-16)	16.3.0
2020-03	RAN#87	RP-200401	0490		A	CR to TS 38.133: Corrections to FR1-FR2 event triggered test cases Annex A.7 (Rel-16)	16.3.0
2020-03	RAN#87	RP-200401	0492		A	CR to TS 38.133: Clarifications to AoA setup and AoA cell assignment Annex A.5 (Rel-16)	16.3.0
2020-03	RAN#87	RP-200401	0494		A	CR to TS 38.133: Clarifications to AoA setup Annex A.8 (Rel-16)	16.3.0
2020-03	RAN#87	RP-200401	0496		A	CR to TS 38.133: Addition of TC A.4.7.2.2 (Rel-16)	16.3.0
2020-03	RAN#87	RP-200401	0500		A	Editorial correction of EN-DC FR1 L1-RSRP measurement for beam reporting	16.3.0
2020-03	RAN#87	RP-200401	0502		A	Editorial correction of NR SA FR1 L1-RSRP measurement for beam reporting	16.3.0
2020-03	RAN#87	RP-200401	0509		A	CR on removing one-shot timing adjustment requirements (Cat A)	16.3.0
2020-03	RAN#87	RP-200401	0516		A	Correction to BWP switching delay_r16	16.3.0
2020-03	RAN#87	RP-200401	0518		A	Correction to inter-RAT measurement on LTE serving carrier_r16	16.3.0
2020-03	RAN#87	RP-200401	0520		A	Correction to configurations for TRS_r16	16.3.0
2020-03	RAN#87	RP-200401	0522		A	Correction to FR1 SA inter-RAT measurement TCs_r16	16.3.0
					NOTE	The CR is not implemented because the corresponding Cat F CR is not implementable.	
2020-03	RAN#87	RP-200401	0524		A	Correction to interruption TCs_r16	16.3.0
					NOTE	The CR is not implemented because the corresponding Cat F CR is not implementable.	
2020-03	RAN#87	RP-200401	0528		A	Correction to RF channels configuration_r16	16.3.0
2020-03	RAN#87	RP-200401	0530		A	Correction to RRC release with redirection TCs_r16	16.3.0
2020-03	RAN#87	RP-200401	0532		A	Correction to UL reconfiguration delay TCs_r16	16.3.0
2020-03	RAN#87	RP-200401	0538		A	CR on SSB RLM test cases EN-DC R16	16.3.0
2020-03	RAN#87	RP-200401	0540		A	CR on SSB RLM test cases SA R16	16.3.0
2020-03	RAN#87	RP-200401	0542		A	CR on cell reselection test cases for FR2 SA R16	16.3.0
2020-03	RAN#87	RP-200401	0544		A	OCNG pattern for TDM-ed SSB R16	16.3.0
2020-03	RAN#87	RP-200401	0564		A	NR editorial correction	16.3.0
2020-03	RAN#87	RP-200401	0580		A	CR 38.133 (8.11) Corrections to PSCell change delay requirements	16.3.0
2020-03	RAN#87	RP-200401	0587		A	PRACH configurations in FR1 SSB based RLM tests	16.3.0
2020-03	RAN#87	RP-200401	0589		A	PRACH configurations in FR1 SSB based BFR tests	16.3.0
2020-03	RAN#87	RP-200375	0437	1	B	CR for Conditional PSCell addition/change RRM requirement	16.3.0
2020-03	RAN#87	RP-200381	0440		B	n26 introduction to 38.133	16.3.0
2020-03	RAN#87	RP-200374	0452	1	B	CR on interruption requirements for NR V2X	16.3.0
2020-03	RAN#87	RP-200372	0455		B	CR on RRM requirement for maximum MIMO layer adaptation	16.3.0
2020-03	RAN#87	RP-200389	0460	1	F	introduce n18 into TS38.133	16.3.0
2020-03	RAN#87	RP-200374	0473	1	B	CR of NR V2X RRM(introduction & reliability of GNSS signal)	16.3.0
2020-03	RAN#87	RP-200374	0476	2	B	CR on NR V2X initiation SLSS 38.133 -R16	16.3.0
2020-03	RAN#87	RP-200401	0479		F	CR to 38.133 NR reporting criteria	16.3.0
2020-03	RAN#87	RP-200382	0486		B	Introduction of n53 into 38.133	16.3.0
2020-03	RAN#87	RP-200371	0498		B	Updates to SA NR interruption requirements for NR-U	16.3.0
2020-03	RAN#87	RP-200401	0510		F	CR on inter-band EN-DC and NE-DC synchronous requirements	16.3.0
2020-03	RAN#87	RP-200375	0511	1	B	CR on DAPS handover requirements	16.3.0
2020-03	RAN#87	RP-200374	0512		B	CR on introducing UE sidelink timing requirements for NR V2X	16.3.0
2020-03	RAN#87	RP-200370	0545	1	F	CR on CLI measurement requirements	16.3.0
2020-03	RAN#87	RP-200370	0546	1	F	CR on CLI measurement accuracy requirements	16.3.0
2020-03	RAN#87	RP-200406	0547		B	CR on Interruptions at SCell activation/deactivation in async NR-DC	16.3.0
2020-03	RAN#87	RP-200406	0548	1	F	CR on direct SCell activation delay	16.3.0
2020-03	RAN#87	RP-200376	0551	1	F	Correction on handover requirements for SRVCC	16.3.0
2020-03	RAN#87	RP-200371	0558	1	B	CR to 38.133 to address NR-U inter-RAT measurements	16.3.0
2020-03	RAN#87	RP-200401	0578		F	CR 38.133 (8.3.2) Correction of error in Rel-16 SCell activation	16.3.0
2020-03	RAN#87	RP-200370	0582		B	CR for conditions for cross link interference measurements (section B)	16.3.0
2020-06	RAN#88	RP-200987	0595		A	[CR] Editorial corrections for 38.133 R16 Core Part - Cat A	16.4.0
2020-06	RAN#88	RP-200987	0596		F	[CR] Editorial corrections for 38.133 R16 Core Part - Cat F	16.4.0
2020-06	RAN#88	RP-200987	0598		A	[CR] Editorial corrections for 38.133 R16 Perf Part - Cat A	16.4.0
2020-06	RAN#88	RP-200966	0599		F	[CR] Delay requirements for direct SCell activation	16.4.0
2020-06	RAN#88	RP-200987	0600		F	[CR] Editorial corrections for 38.133 R16 Perf Part - Cat F	16.4.0
2020-06	RAN#88	RP-200987	0602		A	CR to Intra-frequency handover from FR1 to FR1	16.4.0
2020-06	RAN#88	RP-200987	0606		A	CR to A.6.1.2.1 Cell reselection to higher priority E-UTRAN	16.4.0
2020-06	RAN#88	RP-200987	0608		A	Correction to General test parameters in A.6.6.1.2	16.4.0
2020-06	RAN#88	RP-200987	0620		A	CR on CSSF correction for R16 TS38.133	16.4.0
2020-06	RAN#88	RP-201047	0625	1	B	CR on multiple SCell activation deactivation requirement for R16	16.4.0

2020-06	RAN#88	RP-201047	0626	1	B	CR on multiple SCell activation interruption requirement for R16	16.4.0
2020-06	RAN#88	RP-200987	0629		A	CR on Active TCI State Switching requirements - Rel16	16.4.0
2020-06	RAN#88	RP-201055	0632	2	F	Rapporteur CR for TS38.133	16.4.0
2020-06	RAN#88	RP-201048	0635	2	B	CR on minimum requirement at transition period for UE power saving	16.4.0
2020-06	RAN#88	RP-200958	0636	1	F	CR on interruption requirements for NR V2X	16.4.0
2020-06	RAN#88	RP-200975	0641	1	B	CR on cell identification requirements for NR HST	16.4.0
2020-06	RAN#88	RP-201044	0642	2	B	CR on PRS-RSRP measurement report mapping	16.4.0
2020-06	RAN#88	RP-201044	0645	1	B	CR on SRS RSRP measurement report mapping	16.4.0
2020-06	RAN#88	RP-200973	0646	2	B	CR to TS38.133 on introduction of L1-SINR Measurement Requirement (Section 3.3 and 9)	16.4.0
2020-06	RAN#88	RP-200973	0648	1	B	CR to TS38.133 on introduction of SCell BFRQ Procedure (Section 8.5)	16.4.0
2020-06	RAN#88	RP-200987	0651		A	Add UE Beam assumption for RRM Test cases in A.7.3, A.7.4, A.7.7	16.4.0
2020-06	RAN#88	RP-200987	0653		A	Add UE Beam assumption for RRM Test cases in A.5.3, A.5.4, A.5.7	16.4.0
2020-06	RAN#88	RP-200987	0655		A	Update of FR2 RLM Test cases with 2 Angles of Arrival	16.4.0
2020-06	RAN#88	RP-200987	0657		F	Update of Tx Timing Test cases	16.4.0
2020-06	RAN#88	RP-200987	0659		A	Update of FR2 RLM and BFD-LR Test cases	16.4.0
2020-06	RAN#88	RP-200987	0661		A	Update of FR2 SS-RSRP Test cases	16.4.0
2020-06	RAN#88	RP-200987	0663	1	A	CR on TCI state switch	16.4.0
2020-06	RAN#88	RP-200987	0665		A	CR on PDSCH RMC	16.4.0
2020-06	RAN#88	RP-201047	0668	1	B	CR on active spatial relation switch	16.4.0
2020-06	RAN#88	RP-200976	0671	1	B	CR to TS 38.133: CHO RRM requirement	16.4.0
2020-06	RAN#88	RP-201047	0672	1	B	CR to TS 38.133: RRM requirement for UE-specific CBW change delay	16.4.0
2020-06	RAN#88	RP-201047	0673		B	CR to TS 38.133: RRM requirement for interruption due to UE-specific CBW change	16.4.0
2020-06	RAN#88	RP-200969	0678	1	B	CR to TS 38.133: introducing 2-step RACH core requirements	16.4.0
2020-06	RAN#88	RP-200987	0680		A	Correction of CFRA RSRP threshold	16.4.0
2020-06	RAN#88	RP-200970	0682		B	CR for event triggered reporting tests for CLI	16.4.0
2020-06	RAN#88	RP-200958	0685		B	CR of NR V2X abbreviations	16.4.0
2020-06	RAN#88	RP-200958	0686	1	B	CR of interruption for switching between NR SL and LTE SL	16.4.0
2020-06	RAN#88	RP-200958	0687	2	F	CR of NR V2X editorial correction	16.4.0
2020-06	RAN#88	RP-200971	0689	1	B	38.133 CR on cell re-selection requirements for Rel-16 NR HST	16.4.0
2020-06	RAN#88	RP-201047	0690	1	B	CR on introducing inter-frequency measurements without measurement gap (9.1.5, 9.1.6, 9.3.1, 9.3.4, 9.3.5)	16.4.0
2020-06	RAN#88	RP-200987	0696		A	CR on SMTC period for beam management requirements	16.4.0
2020-06	RAN#88	RP-200987	0698		A	CR for CSI-RS based L1-RSRP measurement period	16.4.0
2020-06	RAN#88	RP-200987	0700		A	CR on RACH test cases with CSI-RS resource R16	16.4.0
2020-06	RAN#88	RP-200987	0704		A	CR on TS38.133 for modification of the layer 3 and layer 1 measurement sharing factor when both SSB and RSSI symbol to be measured are considered	16.4.0
2020-06	RAN#88	RP-200987	0706		A	CR on TS38.133 for modification on number of cells and number of SSB to be measured for FR2 intra-frequency measurement	16.4.0
2020-06	RAN#88	RP-200987	0708		A	[CR] TCI state switch delay 38.133 R16 Cat A	16.4.0
2020-06	RAN#88	RP-201047	0709	1	F	LTE CGI measurements with autonomous gaps for 38.133	16.4.0
2020-06	RAN#88	RP-201042	0710	3	B	Updates to general section for NR-U in 38.133	16.4.0
2020-06	RAN#88	RP-200976	0711	1	F	Correction to DAPS HO requirements in 38.133	16.4.0
2020-06	RAN#88	RP-201049	0712	2	F	SRVCC test case for event triggered reporting	16.4.0
2020-06	RAN#88	RP-201049	0713		F	Gap applicability errors corrected for SRVCC	16.4.0
2020-06	RAN#88	RP-200987	0715		A	Correction of NR SA FR2 inter-freq measurement reporting	16.4.0
2020-06	RAN#88	RP-200968	0717		F	NTA_offset setting for NR coexistence with NB-IoT	16.4.0
2020-06	RAN#88	RP-201042	0718	2	B	CR to TS 38.133: adding NR-U Handover.	16.4.0
2020-06	RAN#88	RP-200975	0723	1	B	CR on cell re-selection requirement for NR-EUTRAN measurement in TS38.133	16.4.0
2020-06	RAN#88	RP-201042	0725	1	B	CR: Introduction of L1-RSRP measurement requirements with CCA	16.4.0
2020-06	RAN#88	RP-200987	0727		A	CR: Correction of L1-RSRP measurement period	16.4.0
2020-06	RAN#88	RP-200987	0729		A	CR to TS 38.133: Correction to CSI-RS configurations in A.3.14 (Rel-16)	16.4.0
2020-06	RAN#88	RP-200987	0731		A	CR to TS 38.133: Correction to SMTC configuration in measurement accuracy tests (Rel-16)	16.4.0
2020-06	RAN#88	RP-200987	0733		A	CR to TS 38.133: Clarifications to AoA setup Annex A.5 (Rel-16)	16.4.0
2020-06	RAN#88	RP-200987	0735		A	CR to TS 38.133: Clarifications to AoA setup Annex A.7 (Rel-16)	16.4.0
2020-06	RAN#88	RP-201048	0736		F	CR for maximum MIMO layer adaptation	16.4.0
2020-06	RAN#88	RP-200987	0738	1	F	Applicability of QCL	16.4.0
2020-06	RAN#88	RP-201047	0741	1	B	CR to 38.133 on SRS carrier switching interruption requirements	16.4.0
2020-06	RAN#88	RP-201047	0742	1	B	CR to 38.133 on impact to measurement requirements due to LTE SRS carrier switching	16.4.0
2020-06	RAN#88	RP-200969	0743	1	B	CR to 38.133 on UE transmit timing requirements for 2-step RACH	16.4.0
2020-06	RAN#88	RP-200987	0744	1	F	CR to 38.133 on intra frequency measurements without gaps	16.4.0
2020-06	RAN#88	RP-200987	0748		A	CR on Psharingfactor_r16	16.4.0

2020-06	RAN#88	RP-200987	0750		A	CR on E-UTRAN Serving Cell Parameters_r16	16.4.0
2020-06	RAN#88	RP-200987	0752		A	CR on Modified parameters for BFD TCs with 4Rx antenna_r16	16.4.0
2020-06	RAN#88	RP-200987	0754		A	CR on BFD TCs_r16	16.4.0
2020-06	RAN#88	RP-200987	0756		A	CR on UL carrier RRC reconfiguration Delay TC_r16	16.4.0
2020-06	RAN#88	RP-200987	0758		A	CR to FR1 SCell activation delay test cases_r16	16.4.0
2020-06	RAN#88	RP-200987	0760		A	CR to inter-frequency measurement TCs_r16	16.4.0
2020-06	RAN#88	RP-200987	0762	1	F	CR to interruption TCs_r16	16.4.0
2020-06	RAN#88	RP-200987	0763	1	F	CR to FR1 SA inter-RAT measurement TCs_r16	16.4.0
2020-06	RAN#88	RP-201047	0764	1	B	CR on introduction of RRM requirements for BWP switching delay on multiple CCs	16.4.0
2020-06	RAN#88	RP-201042	0767	1	B	CR on introduction of Active TCI state switching delay with CCA Requirements for NR-U	16.4.0
2020-06	RAN#88	RP-201042	0768	2	B	CR on introduction of reporting criteria for NR-U	16.4.0
2020-06	RAN#88	RP-201042	0770	1	B	CR on introduction of RRC_INACTIVE state mobility requirements for NR-U	16.4.0
2020-06	RAN#88	RP-200987	0775		A	CR on interruption due to Active BWP switch (Cat A)	16.4.0
2020-06	RAN#88	RP-200987	0779		A	CR on UE transmit timing (Cat A)	16.4.0
2020-06	RAN#88	RP-200987	0781		A	Editorial CR on TS 38.133 Rel-16 (Cat A)	16.4.0
2020-06	RAN#88	RP-200987	0783		A	CR on RRC Connection Release with Redirection (Cat A)	16.4.0
2020-06	RAN#88	RP-200987	0785		A	CR on RRC Re-establishment test cases (Cat A)	16.4.0
2020-06	RAN#88	RP-200987	0787		A	CR on Timing advance test cases for EN-DC (Cat A)	16.4.0
2020-06	RAN#88	RP-200987	0789		A	CR on Timing test cases for NR SA (Cat A)	16.4.0
2020-06	RAN#88	RP-201045	0792	1	B	CR on DL interruption Tx switching between two uplink carriers	16.4.0
2020-06	RAN#88	RP-200975	0796	1	B	Cell identification in connected mode for NR-EUTRAN measurement in HST	16.4.0
2020-06	RAN#88	RP-200987	0799		A	Correction on TCI state switching R16	16.4.0
2020-06	RAN#88	RP-200987	0801		A	Accuracy of carrier aggregation in NR R16	16.4.0
2020-06	RAN#88	RP-201049	0802	1	B	Test case for NR to UTRA FDD Inter-RAT handover	16.4.0
2020-06	RAN#88	RP-200976	0804		F	CR on conditional PSCell change requirements	16.4.0
2020-06	RAN#88	RP-200973	0806	1	B	CR on SCell BFD and CBD requirements	16.4.0
2020-06	RAN#88	RP-201047	0808	1	B	CR on interruption requirements for FR2 inter-band CA	16.4.0
2020-06	RAN#88	RP-201047	0809		B	CR on scaling factor CSSFoutside_gap for FR2 inter-band CA	16.4.0
2020-06	RAN#88	RP-201047	0810	1	B	CR on scheduling availability requirements for FR2 inter-band CA	16.4.0
2020-06	RAN#88	RP-200987	0813		A	CR 38.133 (8.10.5) Corrections to RRC-based TCI state change	16.4.0
2020-06	RAN#88	RP-200966	0814		F	CR 38.133 (8.3.4-5) Corrections to Direct SCell activation	16.4.0
2020-06	RAN#88	RP-200987	0816		A	CR 38.133 (8.3.2) Corrections to SCell Activation delay requirements	16.4.0
2020-06	RAN#88	RP-200966	0817	1	F	CR 38.133 (8.3.4-5) Addition of interruption windows for Direct SCell Activation	16.4.0
2020-06	RAN#88	RP-200978	0818	1	B	CR to 38.133 for Introduction of band n259	16.4.0
2020-06	RAN#88	RP-201047	0819	1	B	CR on SCell activation requirements for FR2 inter-band CA	16.4.0
2020-06	RAN#88	RP-200987	0821		A	CR on FR2 measurement requirements outside gaps R16	16.4.0
2020-06	RAN#88	RP-200987	0823		A	CR on inter-RAT RSTD requirements for NE-DC in 38.133 R16	16.4.0
2020-06	RAN#88	RP-200987	0825		A	CR on SCell activation requirements R16	16.4.0
2020-06	RAN#88	RP-200987	0827		A	CR on SSB based L1-RSRP measurement R16	16.4.0
2020-06	RAN#88	RP-200987	0829		A	CR on L1-RSRP delay tests for FR2 R16	16.4.0
2020-06	RAN#88	RP-200987	0831		A	CR to L1-RSRP accuracy TC for FR2 EN-DC R16	16.4.0
2020-06	RAN#88	RP-200987	0833		A	CR to L1-RSRP accuracy TC for FR2 SA R16	16.4.0
2020-06	RAN#88	RP-200987	0835		A	CR to TCI state switch TC R16	16.4.0
2020-06	RAN#88	RP-200970	0836		F	CR on CLI measurement requirements	16.4.0
2020-06	RAN#88	RP-200970	0837	1	F	CR on CLI measurement performance requirements	16.4.0
2020-06	RAN#88	RP-200970	0838		B	CR on test cases for SRS-RSRP measurement accuracy in FR1	16.4.0
2020-06	RAN#88	RP-200970	0839	1	B	CR on test cases for SRS-RSRP measurement accuracy in FR2	16.4.0
2020-06	RAN#88	RP-200970	0840		B	CR on test cases for CLI-RSSI measurement accuracy in FR1	16.4.0
2020-06	RAN#88	RP-200970	0841	1	B	CR on test cases for CLI-RSSI measurement accuracy in FR2	16.4.0
2020-06	RAN#88	RP-200966	0843		B	CR on interruption requirements for direct SCell activation for 38.133	16.4.0
2020-06	RAN#88	RP-200966	0844	1	B	CR on delay requirements for SCell dormancy	16.4.0
2020-06	RAN#88	RP-200966	0845	1	B	CR on interruption requirements for SCell dormancy	16.4.0
2020-06	RAN#88	RP-201044	0847	1	B	CR for gNB Rx-Tx time difference and UL-RTOA report mapping	16.4.0
2020-06	RAN#88	RP-201044	0849	1	B	CR for AoA/ZoA report mapping	16.4.0
2020-06	RAN#88	RP-201048	0854	2	B	Measurement requirements for UEs under power saving mode	16.4.0
2020-06	RAN#88	RP-201044	0857	1	B	NR E-CID reporting criteria requirements	16.4.0
2020-06	RAN#88	RP-201044	0858	1	B	NR E-CID measurement requirements	16.4.0
2020-06	RAN#88	RP-201044	0862	1	B	Positioning measurement accuracy requirements structure in section 10	16.4.0
2020-06	RAN#88	RP-201044	0863	2	B	Reporting criteria for NR RSTD	16.4.0
2020-06	RAN#88	RP-200987	0867		A	Clarification on RLM	16.4.0
2020-06	RAN#88	RP-201042	0869		B	BWP switching interruption requirement due to consistent UL failure in 38.133	16.4.0
2020-06	RAN#88	RP-200969	0871	1	B	Applicability of 2-step RA and 4-step RA in RRM requirements in 38.133	16.4.0
2020-06	RAN#88	RP-200975	0874	1	B	CR to TS 38.133: NR HST beam management requirements	16.4.0

2020-06	RAN#88	RP-201047	0875	1	B	CR on 38133 interruption requirements for BWP switching on multiple CCs	16.4.0
2020-06	RAN#88	RP-200966	0879	1	B	Big CR Introduction of UE requirement for MR-DC early measurement reporting in 38.133	16.4.0
2020-06	RAN#88	RP-201042	0885		B	RRC release with redirection requirements in NR-U in 38.133	16.4.0
2020-06	RAN#88	RP-200988	0886	1	A	Rapporteur CR for TS38.133	16.4.0
2020-06	RAN#88	RP-201047	0887		B	CR: mandatory gap pattern	16.4.0
2020-09	RAN#88	RP-201512	0889		A	CR to Redirection from NR in FR1 to E-UTRAN	16.5.0
2020-09	RAN#88	RP-201512	0891		A	CR to timing advance adjustment accuracy in FR1	16.5.0
2020-09	RAN#88	RP-201512	0895		A	CR to SS-RSRQ Intra-Frequency and Inter-frequency FR1 measurement accuracy	16.5.0
2020-09	RAN#88	RP-201512	0897		A	Update to FR2 240kHz SSB Configurations	16.5.0
2020-09	RAN#88	RP-201512	0899		A	Update of FR2 Random Access Test cases	16.5.0
2020-09	RAN#88	RP-201512	0901		A	Update to FR2 event-triggered reporting RRM Test cases in A.5.6 and A.7.6	16.5.0
2020-09	RAN#88	RP-201512	0903		A	Update to FR2 SS-RSRP RRM Test cases in A.5.7 and A.7.7	16.5.0
2020-09	RAN#88	RP-201512	0905		A	CR to EN-DC timing advance adjustment accuracy in FR2	16.5.0
2020-09	RAN#88	RP-201512	0907		A	CR to configuration of CSI-RS for tracking	16.5.0
2020-09	RAN#88	RP-201512	0909		A	Update of RRC-based Active BWP Switch test cases	16.5.0
2020-09	RAN#88	RP-201512	0911		A	Update to FR2 Annex B RRM side conditions	16.5.0
2020-09	RAN#88	RP-201512	0913		A	Add UE Beam assumption for RRM Test cases in A.5.5	16.5.0
2020-09	RAN#88	RP-201496	0914	1	B	Introduction of the P-MPR 2 bits report mapping in 38.133	16.5.0
2020-09	RAN#88	RP-201512	0922		A	Add UE Beam assumption for RRM Test cases in A.7.5 Rel-16	16.5.0
2020-09	RAN#88	RP-201489	0924	1	F	Maintenance CR for 2-step RA	16.5.0
2020-09	RAN#88	RP-201491	0925	2	B	CR to TS 38.133: PRS RSTD requirements	16.5.0
2020-09	RAN#88	RP-201498	0928	1	F	CR on capabilities for support of event triggering and reporting criteria	16.5.0
2020-09	RAN#88	RP-201512	0931		F	CR for TS38.133 Rel-16, Correction for SCell activation delay requirement	16.5.0
2020-09	RAN#88	RP-201512	0933		A	CR for TS38.133 Rel-16, Correction for RRM core requirements	16.5.0
2020-09	RAN#88	RP-201512	0935		A	CR for TS38.133 Rel-16, Correction for test cases of BWP switching	16.5.0
2020-09	RAN#88	RP-201498	0937	1	B	CR on CSI-RS based intra-frequency measurement requirement (Introduction, requirement applicability and number of cell and beams)	16.5.0
2020-09	RAN#88	RP-201500	0939	1	B	CR on uplink spatial relation switch delay (section 8.12)	16.5.0
2020-09	RAN#88	RP-201506	0940	1	B	Introduction of SCell activation/deactivation delay requirements for SCells operating with CCA	16.5.0
2020-09	RAN#88	RP-201491	0941	2	B	Revision of CSSF within gap to include NR positioning measurements with gap sharing	16.5.0
2020-09	RAN#88	RP-201491	0942	3	B	Introduction of new MG patterns for NR positioning	16.5.0
2020-09	RAN#88	RP-201491	0943	2	B	Introduction of UE Rx-Tx time difference measurement requirements for NR positioning	16.5.0
2020-09	RAN#88	RP-201512	0946		A	CR on TS38.133 for handover test cases	16.5.0
2020-09	RAN#88	RP-201512	0948		A	CR on TS38.133 for introducing the PDSCH RMC configuration in cell re-selection test cases	16.5.0
2020-09	RAN#88	RP-201493	0950	2	F	CR on TS38.133 for dual active protocol stack handover (Section 6.1.3)	16.5.0
2020-09	RAN#88	RP-201507	0952		F	CR on TS38.133 for intra-frequency measurement definition (Section 9.2.1)	16.5.0
2020-09	RAN#88	RP-201512	0956		A	CR on FR2 measurement capability for R16	16.5.0
2020-09	RAN#88	RP-201506	0957		B	CR on UE measurement capability of NR-U for R16	16.5.0
2020-09	RAN#88	RP-201507	0958	1	B	CR on RRM requirement based on dual DRX for FR1+FR2 CA	16.5.0
2020-09	RAN#88	RP-201506	0959		F	Update NR Frequency Band Groups to include Band n30	16.5.0
2020-09	RAN#88	RP-201506	0960		F	Update NR Frequency Band Groups to include Band n14	16.5.0
2020-09	RAN#88	RP-201506	0961		F	CR for Table number mismatch for CLI performance tests	16.5.0
2020-09	RAN#88	RP-201512	0963		A	CR on Inter-RAT RSTD measurements (section 9.4.4)	16.5.0
2020-09	RAN#88	RP-201512	0965		A	CR on active BWP switch in R16	16.5.0
2020-09	RAN#88	RP-201500	0968	1	F	CR on multiple SCells activation (section 8.3.7)	16.5.0
2020-09	RAN#88	RP-201496	0969	1	F	CR on MRTD and MTTD for FR2 inter-band CA	16.5.0
2020-09	RAN#88	RP-201498	0970	1	B	CR on MRTD for FR2 inter-band CA	16.5.0
2020-09	RAN#88	RP-201498	0971	1	B	38.133 CR on UE measurement capability on the number of frequency layers to be monitored for CSI-RS measurement	16.5.0
2020-09	RAN#88	RP-201497	0972		F	38.133 CR on cell re-selection requirements for Rel-16 NR HST	16.5.0
2020-09	RAN#88	RP-201492	0973	1	F	CR of missed requirements based on the agreed CRs in RAN4#95-e	16.5.0
2020-09	RAN#88	RP-201492	0974	1	F	CR of interruption requirements	16.5.0
2020-09	RAN#88	RP-201500	0976	1	F	CR on definition of inter-frequency measurements without measurement gap (9.3.1)	16.5.0
2020-09	RAN#88	RP-201500	0984		F	CR on BWP switch on multiple CCs	16.5.0
2020-09	RAN#88	RP-201512	0986		A	CR for SCell activation delay in FR2 in R16	16.5.0
2020-09	RAN#88	RP-201512	0988		A	CR on TCI state switch delay in R16	16.5.0
2020-09	RAN#88	RP-201506	0991	1	B	CR for timing requirement for NR-U	16.5.0
2020-09	RAN#88	RP-201488	0992	1	B	CR for introduction of pathloss reference signal switching delay	16.5.0

2020-09	RAN#88	RP-201488	0993	1	F	CR for L1-SINR requirement	16.5.0
2020-09	RAN#88	RP-201498	0996	2	B	CR on introduction, applicability and capability for CSI-RS inter-frequency measurement requirements	16.5.0
2020-09	RAN#88	RP-201500	0999	1	B	Impact of CGI reading on L1 and L3 measurement	16.5.0
2020-09	RAN#88	RP-201498	1003	1	B	38.133 CR on introduction of CSI-RS based measurement	16.5.0
2020-09	RAN#88	RP-201488	1006		F	Correction of L1-SINR reporting requirements	16.5.0
2020-09	RAN#88	RP-201506	1007	2	B	CR: Beam management requirements with CCA	16.5.0
2020-09	RAN#88	RP-201507	1008		F	[CR] Corrections to DAPS Handover	16.5.0
2020-09	RAN#88	RP-201500	1010	2	F	CR for FR2 inter-band CA requirements	16.5.0
2020-09	RAN#88	RP-201506	1011	1	D	CR to TS 38.133 - Handover requirements in NR-U	16.5.0
2020-09	RAN#88	RP-201506	1012	2	B	CR to TS 38.133 to address NR-U inter-frequency measurements	16.5.0
2020-09	RAN#88	RP-201512	1015	1	F	CR 38.133 (8.3.2-3) Corrections to SCell activation delay requirements	16.5.0
2020-09	RAN#88	RP-201494	1016	1	B	CR 38.133 (8.3.9-8.3.11) Direct SCell activation delay for multiple downlink SCells	16.5.0
2020-09	RAN#88	RP-201494	1017	2	F	CR 38.133 SCell dormancy switching of multiple SCells	16.5.0
2020-09	RAN#88	RP-201494	1018		B	CR on delay requirements for SCell dormancy	16.5.0
2020-09	RAN#88	RP-201498	1020	1	B	CR on inter-frequency CSI-RS L3 measurement requirements	16.5.0
2020-09	RAN#88	RP-201512	1023		A	Clarification of SNR values in RLM Test cases	16.5.0
2020-09	RAN#88	RP-201512	1025		A	CR to TS 38.133: Corrections to CSI-RS configurations in A.3.14 (Rel-16)	16.5.0
2020-09	RAN#88	RP-201512	1027		A	CR to TS 38.133: Corrections to event triggered test cases (Rel-16)	16.5.0
2020-09	RAN#88	RP-201512	1029		A	CR to TS 38.133: Corrections to inter-RAT test cases (Rel-16)	16.5.0
2020-09	RAN#88	RP-201512	1031		A	CR to TS 38.133: Corrections to AoA setup information in some test cases (Rel-16)	16.5.0
2020-09	RAN#88	RP-201512	1033		A	CR on maintaining handover tests in Rel-16	16.5.0
2020-09	RAN#88	RP-201500	1039	1	F	CR on maintaining measurement restriction requirements for NR CA	16.5.0
2020-09	RAN#88	RP-201500	1041	3	F	CR on BWP switching delay on multiple CCs	16.5.0
2020-09	RAN#88	RP-201506	1042	2	F	CR on active TCI state switching for NR-U	16.5.0
2020-09	RAN#88	RP-201506	1043	2	B	CR on introduction of intra-frequency measurements requirements for NR-U	16.5.0
2020-09	RAN#88	RP-201506	1044	1	B	CR on introduction of Active BWP switching delay requirements for NR-U	16.5.0
2020-09	RAN#88	RP-201506	1045	1	B	CR on introduction of RRC_IDLE state mobility requirements for NR-U	16.5.0
2020-09	RAN#88	RP-201506	1046	1	B	Discussion on RRC re-establishment for NR-U	16.5.0
2020-09	RAN#88	RP-201512	1048		A	CR on reporting criteria for EN-DC in 38.133 R15	16.5.0
2020-09	RAN#88	RP-201512	1050		A	CR on test cases for Active TCI state switch delay R15	16.5.0
2020-09	RAN#88	RP-201512	1052		A	Addition of new default configurations for RMC scheduling r16	16.5.0
2020-09	RAN#88	RP-201512	1054		A	Correction to beam failure detection and link recovery test cases r16	16.5.0
2020-09	RAN#88	RP-201512	1056		A	Correction to BWP switching delay test cases r16	16.5.0
2020-09	RAN#88	RP-201512	1058		A	Correction to FR1 intra-frequency measurement with gap test cases r16	16.5.0
2020-09	RAN#88	RP-201512	1060		A	Correction to inter-RAT HO test cases r16	16.5.0
2020-09	RAN#88	RP-201498	1064	2	B	CR on CSI-RS based intra-frequency measurement requirements	16.5.0
2020-09	RAN#88	RP-201500	1066	1	F	Correction on the interruption requirements due to SRS carrier switching	16.5.0
2020-09	RAN#88	RP-201500	1067	1	F	CSSF for inter-frequency measurement without gap in FR2 inter-band CA scenario	16.5.0
2020-09	RAN#88	RP-201512	1070		A	CR on correction to CSSF within gap R16	16.5.0
2020-09	RAN#88	RP-201512	1072		A	CR on SCell activation requirements R16	16.5.0
2020-09	RAN#88	RP-201512	1075		A	CR on UL BWP configuration for RRM test cases R16	16.5.0
2020-09	RAN#88	RP-201512	1077		A	CR to add UE beam assumption for TC in A.5.6 R16	16.5.0
2020-09	RAN#88	RP-201506	1078		F	CR on reporting criteria for CLI	16.5.0
2020-09	RAN#88	RP-201494	1080	1	B	CR on direct SCell activation	16.5.0
2020-09	RAN#88	RP-201494	1081	2	F	CR on requirements for SCell dormancy	16.5.0
2020-09	RAN#88	RP-201491	1082	1	B	CR for general applicability of PRS measurement requirements	16.5.0
2020-09	RAN#88	RP-201491	1083	2	B	CR for measurement requirements for PRS-RSRP	16.5.0
2020-09	RAN#88	RP-201491	1085	2	B	CR to add CSI-RS related reporting criteria for ECID	16.5.0
2020-09	RAN#88	RP-201490	1088	2	F	Correction CR to Rel-16 UE power saving requirements	16.5.0
2020-09	RAN#88	RP-201506	1090		F	Correction to RACH delay in RRC release requirements in NR-U in 38.133	16.5.0
2020-09	RAN#88	RP-201512	1097		A	CR to 38.133 correction to RRC based BWP switch delay requirements	16.5.0
2020-09	RAN#88	RP-201512	1099		A	CR to 38.133 correction to interruption requirements for per-FR gap in FR2	16.5.0
2020-09	RAN#88	RP-201500	1100		B	CR to 38.133 on CGI reading of NR cell	16.5.0
2020-09	RAN#88	RP-201497	1101		F	CR to TS 38.133: Corrections to Table 9.4.3.3-2 in subclause 9.4.3.3 (Requirements when DRX is used)	16.5.0
2020-09	RAN#88	RP-201506	1102	2	B	Introduction of RLM requirements for NR-U	16.5.0

2020-09	RAN#88	RP-201491	1103	2	B	Measurement report mapping and additional path reporting for UE Rx-Tx	16.5.0
2020-09	RAN#88	RP-201491	1104	2	B	Measurement report mapping and additional path reporting for RSTD	16.5.0
2020-09	RAN#88	RP-201491	1106	1	F	Reporting criteria for NR positioning measurements	16.5.0
2020-09	RAN#88	RP-201491	1107		F	General introduction of NR positioning measurements	16.5.0
2020-09	RAN#88	RP-201498	1108	1	B	CR on scheduling restriction for CSI-RS based intra-frequency measurement	16.5.0
2020-09	RAN#88	RP-201507	1111		F	[CR] Replacing x in references with correct numbers (Core R16 Cat F)	16.5.0
2020-09	RAN#88	RP-201512	1113		A	[CR] Replacing x in references with correct numbers (Core R16 Cat A)	16.5.0
2020-09	RAN#88	RP-201512	1114		A	[CR] Replacing x in references with correct numbers (Perf R16 Cat A)	16.5.0
2020-09	RAN#88	RP-201512	1116		A	Fine/rough beam assumption for idle mode and measurement procedure test case	16.5.0
2020-09	RAN#88	RP-201512	1117		A	CR on BWP switching delay requirements R16	16.5.0
2020-12	RAN#90	RP-202433	1108	4	B	CR on scheduling restriction for CSI-RS based intra-frequency measurement	17.0.0
2020-12	RAN#90	RP-202487	1119		A	RB allocation and Noc level in RLM Test cases	17.0.0
2020-12	RAN#90	RP-202487	1121		A	Update FR2 event-triggered reporting Test cases in A.5.6, A.7.6	17.0.0
2020-12	RAN#90	RP-202487	1123		A	240kHz SSB SCS Configuration for FR2 SS-RSRP Test cases	17.0.0
2020-12	RAN#90	RP-202487	1125		A	Correct UE beam assumption for Test Cases in A.5.6	17.0.0
2020-12	RAN#90	RP-202487	1127		A	Aggregation level of CORESET for RMC scheduling	17.0.0
2020-12	RAN#90	RP-202487	1129		A	Clarify FR1 NSA SS-SINR measurement TCs	17.0.0
2020-12	RAN#90	RP-202487	1131		A	FR1 Inter-frequency Event triggered Reporting tests in DRX	17.0.0
2020-12	RAN#90	RP-202487	1133		A	E-UTRAN	17.0.0
2020-12	RAN#90	RP-202419	1138		F	CR for DAPS HO test applicability	17.0.0
2020-12	RAN#90	RP-202487	1139		F	Maintenance CR on SA inter-frequency event triggered reporting tests for FR1	17.0.0
2020-12	RAN#90	RP-202433	1140	1	F	CR on CSSF with both CSI-RS and SSB	17.0.0
2020-12	RAN#90	RP-202444	1146		A	CR on CSI-RS BW condition for BFD/CBD R16	17.0.0
2020-12	RAN#90	RP-202444	1148		A	CR on AP-CSI-RS based L1-RSRP measurement R16	17.0.0
2020-12	RAN#90	RP-202427	1152	1	F	CR of NR V2X operating band group	17.0.0
2020-12	RAN#90	RP-202436	1155	1	F	CR on TS38.133 for dual active protocol stack handover	17.0.0
2020-12	RAN#90	RP-202430	1156	2	F	CR on TS38.133 interruption time for CA with non-aligned frame boundaries	17.0.0
2020-12	RAN#90	RP-202444	1158		F	CR on TS38.133 for inter-frequency measurement requirement without gap	17.0.0
2020-12	RAN#90	RP-202487	1160		A	CR on TS38.133 for cell activation and deactivation test case	17.0.0
2020-12	RAN#90	RP-202487	1162		A	CR on TS38.133 for cell reselection test case	17.0.0
2020-12	RAN#90	RP-202487	1164		A	CR on TS38.133 for active BWP switch test cases	17.0.0
2020-12	RAN#90	RP-202487	1165		F	CR on TS38.133 for E-UTRAN	17.0.0
2020-12	RAN#90	RP-202509	1166		F	CR on TS38.133 for SCell activation and deactivation delay test cases	17.0.0
2020-12	RAN#90	RP-202487	1168		A	CR for TS38.133 Rel-16, Correction for RRM core and test cases	17.0.0
2020-12	RAN#90	RP-202433	1171	1	F	CR on abbreviations about CSI-RS based measurement in 38.133.	17.0.0
2020-12	RAN#90	RP-202442	1184		F	CR to TS 38.133: Add information on the inter-band EN-DC and UL CA configurations with no DL interruption	17.0.0
2020-12	RAN#90	RP-202433	1186	1	F	CR on R16 CSI-RS based L3 measurements	17.0.0
2020-12	RAN#90	RP-202419	1187	2	B	Intra-band Inter-frequency sync DAPS handover test in SA for FR1	17.0.0
2020-12	RAN#90	RP-202427	1191	1	F	CR: Interruption requirement for NR V2X synchronization source change	17.0.0
2020-12	RAN#90	RP-202432	1193		F	Fine/rough beam assumption for CLI performance test cases	17.0.0
2020-12	RAN#90	RP-202435	1194	1	F	38.133 CR on CSSFintra for measurement period for intra-frequency measurements in connected mode for Rel-16 NR HST	17.0.0
2020-12	RAN#90	RP-202486	1196		A	CR on carrier frequency range of PCell/PSCell for the maximum number of RLM-RS resources	17.0.0
2020-12	RAN#90	RP-202487	1209		A	Correction on beamFailureInstanceMaxCount for test cases of availability restriction during FR2 BFR in R16	17.0.0
2020-12	RAN#90	RP-202444	1212	1	F	Correction on unknown SCell activation in FR2.	17.0.0
2020-12	RAN#90	RP-202415	1213	1	B	Big CR on 2-step RA type RRM performance requirements	17.0.0
2020-12	RAN#90	RP-202431	1214	1	F	CR Maintenance 2-step RACH RRM requirements	17.0.0
2020-12	RAN#90	RP-202487	1216		A	Correction of RRM tests	17.0.0
2020-12	RAN#90	RP-202435	1217	1	F	CR on IDLE state cell re-selection requirements for HST in 38.133	17.0.0
2020-12	RAN#90	RP-202487	1225		A	Correction to types of requirements in annex A	17.0.0
2020-12	RAN#90	RP-202487	1227		A	Corrections to frequency range in interfrequency measurement procedures tests	17.0.0
2020-12	RAN#90	RP-202487	1230		A	Correction on TBD values in FR1+FR2 interfrequency RSRP accuracy tests	17.0.0
2020-12	RAN#90	RP-202486	1232		A	Addition of symbol definitions	17.0.0
2020-12	RAN#90	RP-202487	1236		A	Square bracket removal in 38.133 section A.1 to A.5	17.0.0
2020-12	RAN#90	RP-202487	1238		A	Square bracket removal in 38.133 section A.6 to A.8	17.0.0
2020-12	RAN#90	RP-202419	1240	1	B	Conditional handover test cases for NR	17.0.0

2020-12	RAN#90	RP-202414	1241		B	Updates to general section for NR-U in 38.133	17.0.0
2020-12	RAN#90	RP-202486	1250		A	CR on MO merge	17.0.0
2020-12	RAN#90	RP-202444	1252	1	F	CR to TS 38.133 on DCI based BWP switch requirements for cross carrier scheduling	17.0.0
2020-12	RAN#90	RP-202441	1254	1	B	CR on PRS-RSRP report mapping	17.0.0
2020-12	RAN#90	RP-202487	1259		A	Correction to CSI-RS RMC configuration R16	17.0.0
2020-12	RAN#90	RP-202487	1261		A	Correction to cell reselection test cases R16	17.0.0
2020-12	RAN#90	RP-202487	1263		A	Correction to inter-RAT handover test cases R16	17.0.0
2020-12	RAN#90	RP-202487	1265		A	Correction to NR measurement under LTE SA test cases R16	17.0.0
2020-12	RAN#90	RP-202487	1267		A	Correction to inter-RAT SFTD measurement test cases R16	17.0.0
2020-12	RAN#90	RP-202487	1271		A	CR on maintaining BFD/CBD measurements test cases in TS38.133 R16	17.0.0
2020-12	RAN#90	RP-202487	1273		F	CR on maintaining L1-RSRP measurements test cases R16	17.0.0
2020-12	RAN#90	RP-202446	1275	1	F	Correction CR to Rel-16 UE power saving requirements	17.0.0
2020-12	RAN#90	RP-202442	1276		F	Correction on DL interruption on Tx Switching between two uplink carriers	17.0.0
2020-12	RAN#90	RP-202433	1277	1	F	CR on CSI-RS based intra-frequency measurement requirements	17.0.0
2020-12	RAN#90	RP-202444	1281		F	Correction on RRC based spatial relation switch delay	17.0.0
2020-12	RAN#90	RP-202487	1282		F	Correction on SA inter-RAT measurement FR1 test case	17.0.0
2020-12	RAN#90	RP-202444	1283	1	F	CR on BWP switching delay on multiple CCs	17.0.0
2020-12	RAN#90	RP-202444	1284	1	F	CR on interruption due to active BWP switching on multiple CCs	17.0.0
2020-12	RAN#90	RP-202414	1288	1	F	CR on TCI state switching requirements for NR-U	17.0.0
2020-12	RAN#90	RP-202414	1291		F	CR on intra-frequency measurement requirements for NR-U	17.0.0
2020-12	RAN#90	RP-202486	1296		A	CR on RRC-based BWP switch requirements R16	17.0.0
2020-12	RAN#90	RP-202487	1298		A	CR on RRC-based active TCI state switch test case Rel-16	17.0.0
2020-12	RAN#90	RP-202425	1299		F	Update NR Frequency Band Groups to include Band n48	17.0.0
2020-12	RAN#90	RP-202439	1300		F	Update NR Frequency Band Groups to include Band n65	17.0.0
2020-12	RAN#90	RP-202446	1305		F	CR to 38.133: Correction to relaxed measurement requirements	17.0.0
2020-12	RAN#90	RP-202444	1306	1	F	CR to 38.133: Correction to relaxed measurement requirements	17.0.0
2020-12	RAN#90	RP-202444	1307	1	F	CR to 38.133: Correction to SRS carrier based switching requirements	17.0.0
2020-12	RAN#90	RP-202444	1308	1	F	CR to 38.133: Correction to mandatory gap pattern	17.0.0
2020-12	RAN#90	RP-202509	1309		F	[CR] NR Perf Maintenance R16 Cat F	17.0.0
2020-12	RAN#90	RP-202486	1311		A	[CR] Specify RRC processing delay in TCI state switching delay (Cat A)	17.0.0
2020-12	RAN#90	RP-202486	1317		A	CR on SCell activation requirements R16	17.0.0
2020-12	RAN#90	RP-202487	1319		A	CR on FR2 unknown SCell activation test cases R16	17.0.0
2020-12	RAN#90	RP-202487	1321		A	CR on BWP in L1-RSRP delay and accuracy test cases R16	17.0.0
2020-12	RAN#90	RP-202430	1322	1	F	CR on BWP switching and SCell dormancy	17.0.0
2020-12	RAN#90	RP-202441	1324	1	F	CR to update PRS-RSRP measurement requirements	17.0.0
2020-12	RAN#90	RP-202444	1328	1	F	CR on CGI reading requirements 38.133	17.0.0
2020-12	RAN#90	RP-202509	1330		F	[CR] Specify RRC processing delay in TCI state switching delay for R16 NR-U	17.0.0
2020-12	RAN#90	RP-202442	1331		F	Correction of CR0972 implementation	17.0.0
2020-12	RAN#90	RP-202487	1333		F	CR: Correction of CFRA test in FR2 SA	17.0.0
2020-12	RAN#90	RP-202434	1334	1	F	CR: Clarification of L1-SINR reporting with CSI-RS based CMR and dedicated IMR configured	17.0.0
2020-12	RAN#90	RP-202486	1336		A	Introducing reference to the source of the Lmax and NRLM.	17.0.0
2020-12	RAN#90	RP-202430	1338	2	F	CR on UE requirement for MR-DC early measurement reporting in 38.133	17.0.0
2020-12	RAN#90	RP-202444	1340		F	CR on measurement restrictions for FR2 inter-band CA	17.0.0
2020-12	RAN#90	RP-202487	1342		A	CR to TS 38.133: Corrections to inter-RAT FR1 test cases (Rel-16)	17.0.0
2020-12	RAN#90	RP-202487	1344		A	CR to TS 38.133: Corrections to inter-RAT FR2 test cases (Rel-16)	17.0.0
2020-12	RAN#90	RP-202436	1346		F	CR 38.133 Corrections to Conditional PSCell Change delay requirement	17.0.0
2020-12	RAN#90	RP-202444	1347		F	CR 38.133 Removal of brackets for Multiple SCell activation	17.0.0
2020-12	RAN#90	RP-202430	1348	1	F	CR 38.133 Removal of brackets for SCell Dormancy and Direct SCell Activation	17.0.0
2020-12	RAN#90	RP-202487	1350		A	CR 38.133 Correction to test case for TCI state switching (Rel-16)	17.0.0
2020-12	RAN#90	RP-202418	1358	1	F	gNB timing positioning measurement report mapping update for k	17.0.0
2020-12	RAN#90	RP-202446	1360	1	F	Corrections to UE power saving requirements	17.0.0
2020-12	RAN#90	RP-202487	1364		A	Removal of annex B.2.6 on one shot timing adjustment in 38.133	17.0.0
2020-12	RAN#90	RP-202487	1366		F	Correction to NR FR1 DL active BWP switch of Cell with non-DRX in SA (A.6.5.6.2.1)	17.0.0
2020-12	RAN#90	RP-202444	1367	1	F	Correction to RRC based non-simultaneous multiple CC BWP	17.0.0
2020-12	RAN#90	RP-202414	1369		F	Requirements for known cell in RRC re-establishment with CCA	17.0.0
2020-12	RAN#90	RP-202435	1370		F	CR to TS 38.133: Corrections to Tables 9.5.4.1-1 and 9.5.4.2-1.	17.0.0
2020-12	RAN#90	RP-202486	1372	1	A	CR to 38.133 on Active BWP switch and Active TCI State Switching requirements - Rel16	17.0.0
2020-12	RAN#90	RP-202441	1375	2	F	UE positioning measurements: RSTD	17.0.0
2020-12	RAN#90	RP-202414	1384	1	F	Terminology updates for NR-U	17.0.0
2020-12	RAN#90	RP-202414	1387		F	Clause numbering correction	17.0.0
2020-12	RAN#90	RP-202414	1390	1	F	Measurement requirements for NR-U	17.0.0
2020-12	RAN#90	RP-202444	1391		F	Correction in NR SRS carrier-based switching requirements	17.0.0

2020-12	RAN#90	RP-202419	1393	1	B	Introduction of intra-frequency sync and async DAPS HO test cases in FR1	17.0.0
2020-12	RAN#90	RP-202430	1400	1	F	CR to Multi-SCell activation for FR1 intra-band contiguous CA	17.0.0
2020-12	RAN#90	RP-202430	1401		F	CR to Starting point of an Interruption window at Direct SCell activation	17.0.0
2020-12	RAN#90	RP-202414	1403	1	F	Interruption windows and applicability of SCell activation/deactivation requirements for SCeLLs operating with CCA	17.0.0
2020-12	RAN#90	RP-202419	1406		B	CR on inter-band DAPS handover tests	17.0.0
2020-12	RAN#90	RP-202414	1407		F	Correction to timing requirements in NR-U	17.0.0
2020-12	RAN#90	RP-202417	1409		B	Big CR: Introduction of Rel-16 NR UE Power Saving RRM Performance requirements (TS 38.133)	17.0.0
2020-12	RAN#90	RP-202421	1410		B	Big CR: Introduction of Rel-16 NR FR1 RF WI RRM performance requirements	17.0.0
2020-12	RAN#90	RP-202422	1411		B	Big CR: NR HST RRM performance requirements	17.0.0
2020-12	RAN#90	RP-202487	1413		A	[CR] NR Perf Maintenance R16 Cat A	17.0.0
2021-03	RAN#91	RP-210116	1418		A	[CR] RRM test case maintenance R17 Cat A	17.1.0
2021-03	RAN#91	RP-210116	1424		A	Update FR2 Reference channels and OCNB for FR2 RRM Test cases	17.1.0
2021-03	RAN#91	RP-210116	1427		A	CR to FR1 SA SS-SINR measurement TCs	17.1.0
2021-03	RAN#91	RP-210116	1430		A	CR on E-UTRA carrier for EN-DC event triggered reporting tests	17.1.0
2021-03	RAN#91	RP-210116	1433		A	Add missing FR2 Test case setups and Beam assumptions	17.1.0
2021-03	RAN#91	RP-210091	1437		A	[CR] Core maintenance for 38.133 (Cat A)	17.1.0
2021-03	RAN#91	RP-210071	1446		A	CR on maintenance for inter-band FR2 CA RRM R17	17.1.0
2021-03	RAN#91	RP-210071	1448		A	CR on UE behavior for UE specific CBW change R17	17.1.0
2021-03	RAN#91	RP-210091	1450		A	CR on IDLE/INACTIVE RRM requirement with SMTc2-LP R17	17.1.0
2021-03	RAN#91	RP-210070	1456		A	CR to 38.133 on Link Recovery requirements (R17)	17.1.0
2021-03	RAN#91	RP-210070	1458		A	CR to 38.133 on Pathloss activation delay requirements (R17)	17.1.0
2021-03	RAN#91	RP-210097	1469		B	CR for TS 38.133 introduction of NR band n24	17.1.0
2021-03	RAN#91	RP-210076	1482		A	CR on CSI-RS based L3 measurement	17.1.0
2021-03	RAN#91	RP-210081	1489		A	CR on PRS RSTD measurement requirements	17.1.0
2021-03	RAN#91	RP-210116	1496		A	Correction to cell reselection test case	17.1.0
2021-03	RAN#91	RP-210066	1498		A	Correction to cell reselection test case for UE Power saving	17.1.0
2021-03	RAN#91	RP-210073	1502		A	2-step RACH RRM performance requirements corrections	17.1.0
2021-03	RAN#91	RP-210116	1505		F	Update of DRX configuration in FR1 Event-triggered Test cases	17.1.0
2021-03	RAN#91	RP-210072	1507		A	Big CR-Introduction of NR V2X RRM performance requirements (Rel-17)	17.1.0
2021-03	RAN#91	RP-210070	1511		A	Correction on the measurement restriction for CSI-IM resource in R17	17.1.0
2021-03	RAN#91	RP-210116	1514		A	Correction on PRACH configuration for FR2 Non-Contention based Random Access in R17	17.1.0
2021-03	RAN#91	RP-210116	1517		A	Correction on PRACH configuration for Beam Failure Detection and Link Recovery Test in R17	17.1.0
2021-03	RAN#91	RP-210116	1520		A	Correction on PRACH RMC for FR1 CSI-RS based Non-Contention based Random Access for BFR in R17	17.1.0
2021-03	RAN#91	RP-210071	1522		A	Correction on scheduling availability and measurement restriction on FR2 inter-band CA in R17	17.1.0
2021-03	RAN#91	RP-210077	1527		A	CR on HST RRM requirements in connected mode	17.1.0
2021-03	RAN#91	RP-210070	1534		A	CR to TS38.133 on L1-SINR measurement requirement	17.1.0
2021-03	RAN#91	RP-210064	1536		A	Big CR: Introduction of Rel-16 NR eMIMO RRM performance requirements and test cases	17.1.0
2021-03	RAN#91	RP-210117	1539		A	CR on SCell activation delay maintenance (R17)	17.1.0
2021-03	RAN#91	RP-210091	1542		A	Interruption requirements maintenance in NR-DC (R17)	17.1.0
2021-03	RAN#91	RP-210077	1544		A	CR on HST core part maintenance (R17)	17.1.0
2021-03	RAN#91	RP-210116	1547		A	CR for test requirements correction of SA event triggered reporting tests for FR1 inter-frequency measurements with SSB time index detection when DRX is used	17.1.0
2021-03	RAN#91	RP-210117	1550		A	CR on R15 remaining issues	17.1.0
2021-03	RAN#91	RP-210072	1552		A	CR on V2X interruption	17.1.0
2021-03	RAN#91	RP-210091	1556		A	CR for measurement period requirements correction	17.1.0
2021-03	RAN#91	RP-210122	1560		A	Update on interruption test cases for Tx switching R17	17.1.0
2021-03	RAN#91	RP-210076	1562		A	Maintenance CR for CSI-RS based L3 measurement requirements R17	17.1.0
2021-03	RAN#91	RP-210116	1565		A	Correction on the power of the first preamble for random access in EN-DC and SA in R17	17.1.0
2021-03	RAN#91	RP-210116	1568		A	Correction on the time for SCell activation and CSI-report in R17	17.1.0
2021-03	RAN#91	RP-210116	1571		A	Correction on the Noc level in TS38.133 in R17	17.1.0
2021-03	RAN#91	RP-210079	1578		A	CR on TS38.133 for Pcell change	17.1.0
2021-03	RAN#91	RP-210071	1586		A	CR on TS38.133 for inter-frequency measurement requirement without gap	17.1.0
2021-03	RAN#91	RP-210122	1600		A	Big CR: Introduction of Rel-16 NR RRM enhancements WI performance requirements and test cases (Rel-17)	17.1.0
2021-03	RAN#91	RP-210084	1602		A	CR: Introduction of random access requirements with CCA	17.1.0
2021-03	RAN#91	RP-210084	1604		A	CR: Beam management requirements with CCA	17.1.0
2021-03	RAN#91	RP-210117	1607		A	CR on the filter for beam failure indications in 38.133	17.1.0

2021-03	RAN#91	RP-210116	1616		A	Correction to Aperiodic CSI-RS configurations R17	17.1.0
2021-03	RAN#91	RP-210116	1619		A	Correction to radio link monitoring test cases R17	17.1.0
2021-03	RAN#91	RP-210116	1622		A	Correction to beam failure recovery test cases R17	17.1.0
2021-03	RAN#91	RP-210116	1625		A	Correction to L1-RSRP reporting delay test cases R17	17.1.0
2021-03	RAN#91	RP-210084	1631		A	CR on measurement requirements for NR-U	17.1.0
2021-03	RAN#91	RP-210122	1636		A	CR on maintaining Antenna configurations in TS38.133 R17	17.1.0
2021-03	RAN#91	RP-210122	1639		A	CR on test requirements for measurement performance tests R17	17.1.0
2021-03	RAN#91	RP-210070	1643		A	CR on maintaining L1-SINR measurement requirements Rel-17	17.1.0
2021-03	RAN#91	RP-210093	1646	1	F	CR on condition requirements for UE power class 5 in TS38.133	17.1.0
2021-03	RAN#91	RP-210071	1648		A	Correction on interruptions of SRS carrier switching	17.1.0
2021-03	RAN#91	RP-210071	1652		A	UL spatial relation switching to an unknown DL RS	17.1.0
2021-03	RAN#91	RP-210116	1655		A	Correction on test cases of inter-frequency Measurements R17	17.1.0
2021-03	RAN#91	RP-210122	1660		A	Correction on test cases of DL interruptions at switching between two uplink carriers	17.1.0
2021-03	RAN#91	RP-210081	1670		A	CR to 38.133 correction on CCSF for NR measurements for positioning	17.1.0
2021-03	RAN#91	RP-210072	1672		A	CR to 38.133 correction on reselection of V2X synchronization reference source requirements	17.1.0
2021-03	RAN#91	RP-210066	1675		A	Test case for cell reselection to FR2 intra-frequency NR case for UE configured with relaxed measurement	17.1.0
2021-03	RAN#91	RP-210076	1679		A	Correction on CSSFoutsidgap	17.1.0
2021-03	RAN#91	RP-210077	1683		A	Correction on inter-RAT measurement in high speed scenario	17.1.0
2021-03	RAN#91	RP-210085	1690		A	Correction on inter-RAT E-UTRAN cells for UE configured with relaxed measurement criterion	17.1.0
2021-03	RAN#91	RP-210084	1691		A	Maintenance CR for NR-U core requirements	17.1.0
2021-03	RAN#91	RP-210091	1697		A	Correction of band group notation for FR2	17.1.0
2021-03	RAN#91	RP-210087	1699		A	Correction to Idle Mode CA/DC Measurements for Inactive mode	17.1.0
2021-03	RAN#91	RP-210087	1701		A	CR clarifying the UE measurement requirements for an SCell with dormant BWP	17.1.0
2021-03	RAN#91	RP-210087	1703		A	Correction to simultaneous DCI based BWP switch delay on multiple CCs	17.1.0
2021-03	RAN#91	RP-210116	1714		A	CR to TS 38.133: Redundant and incorrect TCI state in tests with TRS (Rel-17)	17.1.0
2021-03	RAN#91	RP-210071	1721		A	CR 38.133 (8.6.2A) Clarification on DCI-triggered BWP switch on multiple CCs	17.1.0
2021-03	RAN#91	RP-210084	1723		A	Updates in RLM requirements for NR-U	17.1.0
2021-03	RAN#91	RP-210084	1727		A	Terminology updates for NR-U in 38.133	17.1.0
2021-03	RAN#91	RP-210081	1733		A	PRS-RSRP measurement requirements	17.1.0
2021-03	RAN#91	RP-210076	1737		A	38.133 CR on the CSI-RS based measurement requirements	17.1.0
2021-03	RAN#91	RP-210084	1739		A	Applicability of RA with CCA on RRM requirements in NR-U in 38.133	17.1.0
2021-03	RAN#91	RP-210084	1744		A	CR on Active TCI state switching for NR-U (cat A)	17.1.0
2021-03	RAN#91	RP-210071	1746		A	CR on maintenance on BWP switch requirements on multiple CCs (cat A)	17.1.0
2021-03	RAN#91	RP-210116	1751		A	CR on test cases for inter-RAT measurement r17	17.1.0
2021-03	RAN#91	RP-210117	1754		A	CR on SCell activation delay, cell identification requirements on deactivated SCell and inter-RAT ECID requirements for NE-DC R17	17.1.0
2021-03	RAN#91	RP-210116	1757		A	CR on SCell activation TCs R17	17.1.0
2021-03	RAN#91	RP-210087	1759		A	CR on EMR requirement maintenance in 38.133 R17	17.1.0
2021-03	RAN#91	RP-210087	1761		A	CR on SCell dormancy switching R17	17.1.0
2021-03	RAN#91	RP-210071	1771		A	CR on multiple SCell activation requirements R17	17.1.0
2021-03	RAN#91	RP-210071	1773		A	CR on CGI reading requirements 38.133 R17	17.1.0
2021-03	RAN#91	RP-210116	1781		A	Cat-A CR to addition of TRS Configurations in Rel-17 Test Cases	17.1.0
2021-03	RAN#91	RP-210091	1788		A	Cat-A CR to addition of TRS Configurations in Rel-17 Test Case	17.1.0
2021-03	RAN#91	RP-210116	1790		A	CR on correcting SSB and RACH configuration in CSI-RS based beam failure detection and link recovery tests	17.1.0
2021-03	RAN#91	RP-210084	1792		A	CR on Interruptions during SCell activation in NR-U	17.1.0
2021-03	RAN#91	RP-210076	1796		A	CR on core requirement for CSI-RS L3 measurement	17.1.0
2021-03	RAN#91	RP-210091	1797		A	Maintenance CR on interruption at EUTRA SRS carrier switching in 38.133	17.1.0
2021-03	RAN#91	RP-210091	1798		A	Maintenance CR on SCell activation delay requirement in TS38.133	17.1.0
2021-03	RAN#91	RP-210081	1799		A	CR to TS 38.133 on UE Rx-Tx time difference measurements (section 9.9.4)	17.1.0
2021-03	RAN#91	RP-210077	1801		F	CR on introduction of missing HST test cases	17.1.0
2021-06	RAN#92	RP-211083	1809		A	CR to A.3.14 CSI-RS configurations for nzp-CSI-RS-ResourceId values	17.2.0
2021-06	RAN#92	RP-211083	1812		A	CR to Interruptions during measurements on deactivated NR SCC	17.2.0
2021-06	RAN#92	RP-211083	1815		A	CR to CSI-RS based L1-RSRP measurement on resource set with repetition off TCs	17.2.0
2021-06	RAN#92	RP-211084	1818		A	CR to the notation of SMTc in the general test parameters of Re-establishment TCs	17.2.0
2021-06	RAN#92	RP-211084	1821		A	CR to BWP configuration for interruption test case.	17.2.0

2021-06	RAN#92	RP-211084	1827		A	Update of DRX configuration in Event-triggered Test cases	17.2.0
2021-06	RAN#92	RP-211084	1833		A	Update RRM Test cases where 66RBs gives insufficient dB range	17.2.0
2021-06	RAN#92	RP-211084	1836		A	Update Reference channels and OCNG for FR2 240kHz SSB SCS RRM Test cases	17.2.0
2021-06	RAN#92	RP-211084	1839		A	Cat-A CR to Cell Reselection Tests with Async Cells in Rel-17	17.2.0
2021-06	RAN#92	RP-211085	1841		A	Cat-A CR to Cell Reselection Tests with Async Cells in Rel-17	17.2.0
2021-06	RAN#92	RP-211085	1844		A	Cat-A CR to FR2 CORESET and Search Space RMC in Rel-17	17.2.0
2021-06	RAN#92	RP-211085	1847		A	Cat-A CR to PDSCH RMC in Rel-17	17.2.0
2021-06	RAN#92	RP-211085	1850		A	Cat-A CR to TRS Configuration in Rel-17 Test Case	17.2.0
2021-06	RAN#92	RP-211085	1852		A	Cat-A CR to FR1 Single SCell activation requirement with TCI activation in Rel-17	17.2.0
2021-06	RAN#92	RP-211085	1857		A	Maintenance CR for test cases - R17 Cat A	17.2.0
2021-06	RAN#92	RP-211104	1859		A	Correction to cell reselection test case for HST	17.2.0
2021-06	RAN#92	RP-211104	1861		A	Correction to cell reselection test case for UE Power saving	17.2.0
2021-06	RAN#92	RP-211085	1864		A	CR on BFD and link recovery test cases	17.2.0
2021-06	RAN#92	RP-211101	1867		A	CR on CSI-RS intra-frequency requirement and scheduling restriction	17.2.0
2021-06	RAN#92	RP-211101	1868		A	CR on CSI-RS based measurement requirements	17.2.0
2021-06	RAN#92	RP-211103	1872		A	CR on PRS RSTD measurement requirements	17.2.0
2021-06	RAN#92	RP-211101	1876		A	CR for clarification on frequency layer merging R17	17.2.0
2021-06	RAN#92	RP-211104	1878		A	CR on legacy Rel-16 HST NR UE measurement requirements (R17)	17.2.0
2021-06	RAN#92	RP-211097	1880		A	CR on RRC based BWP switching on multiple CCs of EN-DC for FR1 (R17)	17.2.0
2021-06	RAN#92	RP-211104	1882		A	Correction on the power of the first preamble for 2-step RACH	17.2.0
2021-06	RAN#92	RP-211095	1883		A	Terminology update for NR-U	17.2.0
2021-06	RAN#92	RP-211086	1887		A	Maintenance on CSSF for EN-DC and deactivated SCell measurement R17	17.2.0
2021-06	RAN#92	RP-211095	1889		A	CR on reference cell availability for NR-U R17	17.2.0
2021-06	RAN#92	RP-211095	1891		A	CR on SCell activation requirement for NR-U R17	17.2.0
2021-06	RAN#92	RP-211097	1893		A	CR on interruption for SCell addition/release R17	17.2.0
2021-06	RAN#92	RP-211086	1898		A	Core requirement maintenance on signal characteristics (R17)	17.2.0
2021-06	RAN#92	RP-211104	1902		A	CR to 38.133 on Link recovery requirements - R17	17.2.0
2021-06	RAN#92	RP-211097	1907		A	CR to introduce testcase for RRC based BWP switch on multiple CCs- SA in FR2 -R17	17.2.0
2021-06	RAN#92	RP-211097	1908		A	CR to 38.133 on Uplink Spatial relation switch for PUCCH - R17	17.2.0
2021-06	RAN#92	RP-211102	1912	1	A	CR on CSSFintra for HST measurement requirements	17.2.0
2021-06	RAN#92	RP-211102	1914	1	F	CR on test case on NR intra-frequency cell reselection for HST	17.2.0
2021-06	RAN#92	RP-211097	1924		A	CR for test cases for simultaneous DCI and Timer based BWP switch on multiple CCs for NR SA	17.2.0
2021-06	RAN#92	RP-211081	1930	1	A	Correction on the SS-RSRP difference value for SS-RSRP measurement TC in R17	17.2.0
2021-06	RAN#92	RP-211081	1933	1	A	Correction on the CSI-reporting period for SCell activation delay in R17	17.2.0
2021-06	RAN#92	RP-211103	1935	1	A	Introduce the SCell beam failure recovery without the dedicated PUCCH resource in R17	17.2.0
2021-06	RAN#92	RP-211086	1940		A	CR on scheduling restriction of UE during intra-frequency measurements on FR2 in R17	17.2.0
2021-06	RAN#92	RP-211119	1942		A	CR on TS38.133 for direct SCell activation	17.2.0
2021-06	RAN#92	RP-211097	1944		A	CR on TS38.133 for typo modifications on intra frequency and inter frequency measurement requirement	17.2.0
2021-06	RAN#92	RP-211097	1946		A	CR to 38.133 correction on SRS carrier based switching core requirements	17.2.0
2021-06	RAN#92	RP-211097	1948		A	CR to 38.133 correction on SRS carrier based switching test cases	17.2.0
2021-06	RAN#92	RP-211101	1950		A	CR to 38.133 Correction on core requirements for CSI-RS based measurement	17.2.0
2021-06	RAN#92	RP-211105	1954		A	CR to 38.133 correction on CCSF for NR measurements for positioning	17.2.0
2021-06	RAN#92	RP-211097	1959		A	CR on TS38.133 inter-frequency without gap -r17 NOTE Part of the CR is not implemented because changes to clause 9.1.5.1 have no track marks.	17.2.0
2021-06	RAN#92	RP-211105	1970		A	CR to 38.133 Correction on the requirement of FR2 L1-SINR measurement accuracy (Rel-17)	17.2.0
2021-06	RAN#92	RP-211116	1974		B	CR to TS 38.133: Introduction of band n67	17.2.0
2021-06	RAN#92	RP-211116	1975		B	CR to TS 38.133: Introduction of band n85	17.2.0
2021-06	RAN#92	RP-211106	1977		A	CR on UE Rx-Tx time difference measurement period	17.2.0
2021-06	RAN#92	RP-211087	1983		A	CR to TS 38.133: Correction of TDD Configuration for several TCs (Rel-17)	17.2.0
2021-06	RAN#92	RP-211087	1986		A	CR to TS 38.133: Correction of OCNG pattern for several TCs (Rel-17)	17.2.0
2021-06	RAN#92	RP-211087	1989		A	CR to TS 38.133: Correction of IRAT TCs (Rel-17)	17.2.0
2021-06	RAN#92	RP-211087	1992		A	CR to TS 38.133: Corrections to SS-RSRP/RSRQ/SINR accuracy TCs (Rel 17)	17.2.0

2021-06	RAN#92	RP-211087	1995		A	CR to TS 38.133: Several corrections to TCs (Rel 17)	17.2.0
2021-06	RAN#92	RP-211087	1997		F	CR on maintaining condition requirements in TS38.133 R17	17.2.0
2021-06	RAN#92	RP-211106	1999		A	CR on maintaining L1-SINR measurement accuracy requirements R17	17.2.0
2021-06	RAN#92	RP-211106	2001		A	CR on maintaining L1-SINR measurement accuracy tests R17	17.2.0
2021-06	RAN#92	RP-211106	2003		A	CR on maintaining L1-SINR measurement requirements R17	17.2.0
2021-06	RAN#92	RP-211097	2005		A	CR on maintaining SCell activation and deactivation delay test for FR2 inter-band CA R17	17.2.0
2021-06	RAN#92	RP-211106	2007		A	CR on maintaining sync conditions for intra-band DAPS handover R17	17.2.0
2021-06	RAN#92	RP-211106	2009		A	CR on maintaining interruptions for intra-band DAPS handover R17	17.2.0
2021-06	RAN#92	RP-211107	2014		F	CR on maintaining condition requirements for UE power class 5	17.2.0
2021-06	RAN#92	RP-211095	2020		A	CR on Active TCI state switching for NR-U R17	17.2.0
2021-06	RAN#92	RP-211095	2022		A	CR on RLM requirements NR-U R17	17.2.0
2021-06	RAN#92	RP-211095	2024		A	CR on beam management requirements for NR-U R17	17.2.0
2021-06	RAN#92	RP-211095	2026		A	CR on measurement requirements for NR-U R17	17.2.0
2021-06	RAN#92	RP-211095	2028		A	CR on CSSF for NR-U R17	17.2.0
2021-06	RAN#92	RP-211098	2030		A	CR on maintenance of BWP Switch on multiple CCs 38133 R17	17.2.0
2021-06	RAN#92	RP-211087	2033		A	CR on measurement on deactivated SCell and interruption to NR serving cells for measurements on deactivated NR SCell	17.2.0
2021-06	RAN#92	RP-211101	2037		A	CR on time validity of the detected associatedSSB	17.2.0
2021-06	RAN#92	RP-211107	2041		A	Correction on test cases for inter-RAT cell identification in connected mode for HST	17.2.0
2021-06	RAN#92	RP-211101	2045		A	Adding intra-frequency CSI-RS measurement in CSSF	17.2.0
2021-06	RAN#92	RP-211098	2051		A	Correction on SRS carrier switching	17.2.0
2021-06	RAN#92	RP-211103	2053	1	F	CR on condition requirements for L1-SINR measurements R17	17.2.0
2021-06	RAN#92	RP-211109	2055		A	Correction of test case of link recovery with link recovery requests	17.2.0
2021-06	RAN#92	RP-211088	2058		A	Correction to CSI-RS reference configuration R17	17.2.0
2021-06	RAN#92	RP-211088	2062		A	Correction to reference configurations related to DLBWP.0.2 R17	17.2.0
2021-06	RAN#92	RP-211089	2065		A	Correction to TRS reference configuration R17	17.2.0
2021-06	RAN#92	RP-211089	2068		A	Correction to interruption during measurement on deactivated SCell test cases R17	17.2.0
2021-06	RAN#92	RP-211089	2071		A	Correction to FR1 test cases using DLBWP.0.2 R17	17.2.0
2021-06	RAN#92	RP-211089	2076		A	Correction of test parameters for SA inter-frequency event triggered reporting TCs	17.2.0
2021-06	RAN#92	RP-211089	2078		A	CR on Rel-15 SCell activation, SMTC determination and UL timing 38133 R17	17.2.0
2021-06	RAN#92	RP-211119	2080		A	CR on EMR requirements correction 38133 R17	17.2.0
2021-06	RAN#92	RP-211119	2082		A	CR on direct SCell activation R17	17.2.0
2021-06	RAN#92	RP-211119	2084		A	CR on SCell dormancy requirements R17	17.2.0
2021-06	RAN#92	RP-211109	2086		A	CR on MG for PRS measurement 38.133 R17	17.2.0
2021-06	RAN#92	RP-211109	2094		A	CR on CSSF and measurement capability for PRS measurement 38.133 R17	17.2.0
2021-06	RAN#92	RP-211098	2096		A	CR on SSB offset in multiple SCell activation R17	17.2.0
2021-06	RAN#92	RP-211098	2098		A	CR on SMTC alignment in multiple SCell activation R17	17.2.0
2021-06	RAN#92	RP-211101	2100		A	CR on CSI-RS measurement window R17	17.2.0
2021-06	RAN#92	RP-211119	2105		A	Big CR 38.133: Introduction of Rel-16 MR-DC Direct SCell activation and SCell dormancy RRM performance requirements NOTE Part of the CR is not implemented because CCR.2.3 TDD" are already exist	17.2.0
2021-06	RAN#92	RP-211090	2111		A	CR on NR-DC PSCell addition and release delay in Rel17 - Cat A	17.2.0
2021-06	RAN#92	RP-211090	2114		A	Maintenance CR for RRM test cases in Rel17 - Cat A	17.2.0
2021-06	RAN#92	RP-211098	2118		A	CR on test case for RRC-based BWP switch on multiple CCs - TC3 in Rel-17 - Cat A	17.2.0
2021-06	RAN#92	RP-211110	2121		A	Changes to cell reselection tests under power saving	17.2.0
2021-06	RAN#92	RP-211119	2127		A	CR for Direct SCell activation delay	17.2.0
2021-06	RAN#92	RP-211119	2131		A	CR Correction of activation delay for Direct activated SCell	17.2.0
2021-06	RAN#92	RP-211091	2139		A	Correction to AoA setup in FR2	17.2.0
2021-06	RAN#92	RP-211091	2141		A	Correction to AoA setup and beam assumptions in FR2 tests in Rel-16	17.2.0
2021-06	RAN#92	RP-211110	2143		A	Correction to beam assumptions in L1-SINR FR2 tests	17.2.0
2021-06	RAN#92	RP-211098	2145		A	Correction to beam assumptions in FR2 tests on Rel-16 Mandatory gaps	17.2.0
2021-06	RAN#92	RP-211098	2147		A	Correction to beam assumptions in FR2 tests on UL spatial relation	17.2.0
2021-06	RAN#92	RP-211110	2149		A	Correction to HO tests in FR2 under mobility enhancements	17.2.0
2021-06	RAN#92	RP-211110	2153		A	PRS-RSRP measurement requirements	17.2.0
2021-06	RAN#92	RP-211101	2159		A	(R17mirror) CR: RRM congestion control test cases for NR V2X	17.2.0
2021-06	RAN#92	RP-211098	2160		A	(R17mirror) CR: CGI reading test	17.2.0
2021-06	RAN#92	RP-211098	2161		A	(R17mirror) CR: UL spatial relation test	17.2.0
2021-06	RAN#92	RP-211095	2163		A	Interruption during SCell activation requirements for SCells operating with CCA	17.2.0

2021-06	RAN#92	RP-211095	2165		A	SI reading time in RRC mobility control	17.2.0
2021-06	RAN#92	RP-211095	2169		A	Updates in SCell activation in NR-U	17.2.0
2021-06	RAN#92	RP-211095	2171		A	NR-U bands	17.2.0
2021-06	RAN#92	RP-211095	2173		A	Big CR: Introduction of Rel-16 NR-U RRM performance	17.2.0
2021-06	RAN#92	RP-211119	2175		A	CR for core requirement maintenance on direct SCell activation R17	17.2.0
2021-06	RAN#92	RP-211119	2177		A	Big CR: Introduction of Rel-16 MR-DC EMR RRM performance requirements (TS 38.133) NOTE Part of the CR is not implemented because new clause have no reference point	17.2.0
2021-06	RAN#92	RP-211097	2179		A	CR on introducing RRC based Active BWP Switch on multiple CCs in EN-DC FR2	17.2.0
2021-06	RAN#92	RP-211101	2182		A	Big CR: Introduction of Rel-16 CSI-RS based L3 measurement RRM performance requirements	17.2.0
2021-06	RAN#92	RP-211096	2184		A	Big CR: Introduction of Rel-16 NR Positioning RRM performance requirements and test cases	17.2.0
2021-06	RAN#92	RP-211121	2185		B	Big CR: RRM requirements for band n262 in 38.133	17.2.0
2021-09	RAN#93	RP-211902	2196		B	RRM requirements for FR2 FWA for band n259 in 38.133	17.3.0
2021-09	RAN#93	RP-211922	2199		A	Big CR to TS 38.133: NR_newRAT-Core maintenance (Rel-17)	17.3.0
2021-09	RAN#93	RP-211925	2202		A	Big CR to TS 38.133: NR_newRAT-Perf maintenance Part 1 (Rel-17)	17.3.0
2021-09	RAN#93	RP-211925	2205		F	Big CR to TS 38.133: NR_newRAT-Perf maintenance Part 2 (Rel-17)	17.3.0
2021-09	RAN#93	RP-211925	2208		F	Big CR to TS 38.133: NR_newRAT-Perf maintenance Part 3 (Rel-17)	17.3.0
2021-09	RAN#93	RP-211890	2210		A	Big CR to TS 38.133: NR_unlic maintenance Part 1 (Rel-17)	17.3.0
2021-09	RAN#93	RP-211890	2212		A	Big CR to TS 38.133: NR_unlic maintenance Part 2 (Rel-17)	17.3.0
2021-09	RAN#93	RP-211893	2214		F	Big CR to TS 38.133: NR_pos maintenance (Rel-17)	17.3.0
2021-09	RAN#93	RP-211891	2216		A	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 1 (Rel-17)	17.3.0
2021-09	RAN#93	RP-211893	2218		F	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 2 (Rel-17)	17.3.0
2021-12	RAN#94	RP-212833	2225		F	Missing RRM performance requirements for n259 FWA in Rel-17	17.4.0
2021-12	RAN#94	RP-212854	2239		A	Big CR to TS 38.133: NR_newRAT-Core maintenance (Rel-17)	17.4.0
2021-12	RAN#94	RP-212846	2242		F	Big CR to TS 38.133: NR_newRAT-Perf maintenance (Rel-17)	17.4.0
2021-12	RAN#94	RP-212847	2244		A	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 1 (Rel-17)	17.4.0
2021-12	RAN#94	RP-212849	2246		A	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 2 (Rel-17)	17.4.0
2021-12	RAN#94	RP-212847	2248		A	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 3 (Rel-17)	17.4.0
2021-12	RAN#94	RP-212847	2250		A	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 4 (Rel-17)	17.4.0
2022-03	RAN#95	RP-220365	2251		B	Big CRs : RRM requirements for Rel-17 NR SL enhancement	17.5.0
2022-03	RAN#95	RP-220364	2252	1	B	Big CR: RRM requirements for Rel-17 NR SL Relay	17.5.0
2022-03	RAN#95	RP-220342	2253	1	B	Big CR: RRM requirements for Rel-17 NR FR1 RF	17.5.0
2022-03	RAN#95	RP-220373	2258		B	Big CR to TS 38.133 on HST FR2 RRM Core Requirements	17.5.0
2022-03	RAN#95	RP-220372	2259		B	Big CR: RRM requirements for Rel-17 NR FR1 HST enhancements	17.5.0
2022-03	RAN#95	RP-220368	2260		B	Big CR: RRM requirements for Rel-17 NR FeRRM (TS 38.133)	17.5.0
2022-03	RAN#95	RP-220378	2261	1	B	Big CR: RRM requirements for Rel-17 NR MG enhancements	17.5.0
2022-03	RAN#95	RP-220366	2263		B	Big CR: RRM requirements Rel-17 NR UE Power Saving Enhancements	17.5.0
2022-03	RAN#95	RP-220362	2265		B	Big CR: RRM requirements for Rel-17 NR feMIMO	17.5.0
2022-03	RAN#95	RP-220379	2266		B	Big CR: RRM requirements for Rel-17 NR Positioning Enhancements	17.5.0
2022-03	RAN#95	RP-220346	2267		B	Big CR: RRM requirements for Rel-17 Further Multi-RAT Dual-Connectivity enhancements (TS 38.133)	17.5.0
2022-03	RAN#95	RP-220375	2268		B	Big CR: RRM requirements for Rel-17 Enhanced IIoT and URLLC support	17.5.0
2022-03	RAN#95	RP-220367	2269		B	Big CR: RRM requirements for Rel-17 NR SDT in INACTIVE state	17.5.0
2022-03	RAN#95	RP-220337	2272		A	Big CR to TS 38.133: NR_newRAT-Core maintenance (Rel-17)	17.5.0
2022-03	RAN#95	RP-220337	2275	1	F	Big CR to TS 38.133: NR_newRAT-Perf maintenance (Rel-17)	17.5.0
2022-03	RAN#95	RP-220334	2277		A	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 1 (Rel-17)	17.5.0
2022-03	RAN#95	RP-220339	2279		A	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 2 (Rel-17)	17.5.0
2022-03	RAN#95	RP-220339	2281		F	Big CR to TS 38.133: Rel-16 WIs RRM maintenance Part 3 (Rel-17)	17.5.0
2022-03	RAN#95	RP-220345	2282		B	Big CR: RRM requirements for Rel-17 NR MUSIM	17.5.0
2022-03	RAN#95	RP-220909	2284	1	B	Introduction of band n101	17.5.0
2022-06	RAN#96	RP-221681	2286	2	F	FR2 HST neighboring cell measurement requirement correction	17.6.0

2022-06	RAN#96	RP-221677	2288	1	F	SL enhancement core requirement correction	17.6.0
2022-06	RAN#96	RP-221681	2289		F	CR on SRS antenna port switching in TS38.133	17.6.0
2022-06	RAN#96	RP-221681	2290	1	F	CR on HO with PSCell for NE-DC to NE-DC in TS38.133 R17	17.6.0
2022-06	RAN#96	RP-221682	2293	1	F	Maintenance CR for SCG activation on 38.133 R17	17.6.0
2022-06	RAN#96	RP-221677	2294	1	F	Maintenance CR for RRM requirements for NR Uu and SL intra-band con-current operation	17.6.0
2022-06	RAN#96	RP-221681	2295	2	F	CR to TS 38.133 on UL Timing Adjustment	17.6.0
2022-06	RAN#96	RP-221681	2296		B	38.133 CR on introduction of SRS antenna port switching (resubmission)	17.6.0
2022-06	RAN#96	RP-221681	2301	1	F	Completing requirement of HO with PSCell	17.6.0
2022-06	RAN#96	RP-221677	2303	1	F	CR on PRS-RSRP measurement period without gaps	17.6.0
2022-06	RAN#96	RP-221677	2304	1	F	CR on PRS-RSRPP measurement period requirements	17.6.0
2022-06	RAN#96	RP-221677	2305	1	F	CR on the PRS and RRM measurement requirements in RRC_INACTIVE state	17.6.0
2022-06	RAN#96	RP-221682	2307		F	Maintenance CR on TS38.133 for L1 impact due to concurrent MG	17.6.0
2022-06	RAN#96	RP-221682	2308	1	F	Maintenance CR on TS38.133 for L1 impact due to NCSG	17.6.0
2022-06	RAN#96	RP-221682	2309	1	F	CR on TA validation for Rel-17 NR SDT in INACTIVE state	17.6.0
2022-06	RAN#96	RP-221682	2315	1	F	CR to maintain concurrent measurement gap in TS 38.133	17.6.0
2022-06	RAN#96	RP-221682	2316	1	F	CR to maintain measurements with NCSG in TS 38.133	17.6.0
2022-06	RAN#96	RP-221682	2317		F	CR to maintain Selection Reselection of relay UE in TS 38.133	17.6.0
2022-06	RAN#96	RP-221681	2318	1	F	CR on PUCCH SCell activation and deactivation delay requirements	17.6.0
2022-06	RAN#96	RP-221677	2319		F	CR on known condition of unified TCI for UL	17.6.0
2022-06	RAN#96	RP-221677	2320	1	F	CR on measurement restriction and scheduling availability for inter cell L1-RSRP measurement	17.6.0
2022-06	RAN#96	RP-221680	2322		B	CR on RRM requirements for IBM inter-band FR2 UL CA	17.6.0
2022-06	RAN#96	RP-221682	2324	1	F	CR on concurrent measurement gaps	17.6.0
2022-06	RAN#96	RP-221682	2325		F	CR on inter-frequency measurement with NCSG	17.6.0
2022-06	RAN#96	RP-221681	2327	1	F	CR on enhanced requirements for SCell measurement for Rel-17 FR1 HST requirements	17.6.0
2022-06	RAN#96	RP-221682	2328	1	F	CR on Efficient activation/de-activation mechanism for Scells	17.6.0
2022-06	RAN#96	RP-221682	2329	1	F	CR on Efficient activation/de-activation mechanism for one SCG (section 8)	17.6.0
2022-06	RAN#96	RP-221682	2330	1	F	CR on Efficient activation/de-activation mechanism for one SCG (section 9)	17.6.0
2022-06	RAN#96	RP-221682	2331	1	F	CR for TCI state indication with direct SCell activation	17.6.0
2022-06	RAN#96	RP-221682	2332	1	F	CR for remaining aspects of concurrent measurement gaps (section 8)	17.6.0
2022-06	RAN#96	RP-221682	2333	1	F	CR for remaining aspects of concurrent measurement gaps (section 9)	17.6.0
2022-06	RAN#96	RP-221682	2334	1	F	CR to maintain SCG activation and deactivation delay requirements in TS 38.133	17.6.0
2022-06	RAN#96	RP-221677	2335	1	F	CR to 38.133 on positioning measurement requirements in RRC_INACTIVE state	17.6.0
2022-06	RAN#96	RP-221747	2336	2	F	CR 38.133 corrections on L1/L3 measurement requirements for deactivated SCG	17.6.0
2022-06	RAN#96	RP-221677	2337	1	F	CR to TS 38.133 Correction to sidelink core requirements	17.6.0
2022-06	RAN#96	RP-221682	2338	1	F	CR to TS 38.133 Correction to measurements requirements for PDC	17.6.0
2022-06	RAN#96	RP-221681	2339	1	F	CR to TS38.133 for the applicability of requirement for FR2 HST	17.6.0
2022-06	RAN#96	RP-221673	2343	1	B	CR to TS 38.133 - Introduction of licensed 6GHz band n104	17.6.0
2022-06	RAN#96	RP-221684	2344	1	B	CR to TS 38.133: RMR 900MHz band introduction	17.6.0
2022-06	RAN#96	RP-221680	2345		F	Correction on signaling name for FR1 HST	17.6.0
2022-06	RAN#96	RP-221682	2347	1	F	Draft CR on A-TRS based SCell activation and deactivated delay requirements with multiple downlink SCell	17.6.0
2022-06	RAN#96	RP-221682	2348		F	Correction on beam failure detection on deactivated PSCell	17.6.0
2022-06	RAN#96	RP-221681	2351	1	F	CR on maintenance for PUCCH SCell activation	17.6.0
2022-06	RAN#96	RP-221677	2353	1	F	CR on maintaining RRM core requirements for R17 NR SL	17.6.0
2022-06	RAN#96	RP-221677	2356	1	F	Draft CR on maintaining L1-RSRP measurement requirements for R17 inter-cell beam managements	17.6.0

2022-06	RAN#96	RP-221677	2357	1	F	Draft CR on maintaining R17 TRP specific BFR requirements	17.6.0
2022-06	RAN#96	RP-221682	2358	1	F	CR on pre-MG related requirements	17.6.0
2022-06	RAN#96	RP-221682	2359	1	F	CR on collision handling for concurrent MGs	17.6.0
2022-06	RAN#96	RP-221682	2360	1	F	CR on maintenance of NCSG requirements	17.6.0
2022-06	RAN#96	RP-221677	2361	1	F	CR on measurement period requirements with multiple Rx TEGs	17.6.0
2022-06	RAN#96	RP-221677	2362	1	F	CR on requirements for UE Rx-Tx measurement with reduced latency	17.6.0
2022-06	RAN#96	RP-221677	2363	1	F	CR on RSTD measurement period requirements without gaps	17.6.0
2022-06	RAN#96	RP-221677	2365		F	CR on inter-frequency RRM requirements due to PRS measurement in INACTIVE	17.6.0
2022-06	RAN#96	RP-221677	2366		F	CR to introduce per-FR MG for PRS measurement	17.6.0
2022-06	RAN#96	RP-221677	2367	1	F	CR on scheduling restriction for PRS-RSRPP measurement	17.6.0
2022-06	RAN#96	RP-221682	2369	1	F	CR on SDT RRM requirements	17.6.0
2022-06	RAN#96	RP-221654	2370	1	B	CR on mapping table for NR TADV [NRTADV]	17.6.0
2022-06	RAN#96	RP-221682	2371		B	CR update SDT RRM core requirements	17.6.0
2022-06	RAN#96	RP-221681	2373		F	CR on FR2 HST core requirements	17.6.0
2022-06	RAN#96	RP-221682	2374	1	F	CR on core requirements for UE power saving enhancement	17.6.0
2022-06	RAN#96	RP-221682	2375	1	F	CR on New gap pattern for MUSIM	17.6.0
2022-06	RAN#96	RP-221681	2379	1	F	CR on R17 core requirements for HO with PSCell	17.6.0
2022-06	RAN#96	RP-221677	2381	1	F	CR on unified TCI in R17 feMIMO	17.6.0
2022-06	RAN#96	RP-221677	2382	1	F	CR on L1-RSRP measurement requirements for inter-cell BM in R17	17.6.0
2022-06	RAN#96	RP-221681	2383		B	CR to TS 38.133: intra-frequency measurements with gaps for for FR2 NR HST	17.6.0
2022-06	RAN#96	RP-221681	2384	1	B	CR to TS 38.133: SSB-based L1-SINR measurements for FR2 NR HST	17.6.0
2022-06	RAN#96	RP-221682	2386	1	F	CR on TS38.133 for applicability of RLM measurement relaxation	17.6.0
2022-06	RAN#96	RP-221682	2389	1	F	Changes to SDT requirements	17.6.0
2022-06	RAN#96	RP-221676	2390		B	Big CR for RedCap for TS 38.133	17.6.0
2022-06	RAN#96	RP-221681	2393	1	F	CR on requirements for HO with PSCell when PSCell is on CCA in NR SA to EN-DC scenario	17.6.0
2022-06	RAN#96	RP-221681	2394	1	F	CR on SCell activation/deactivation with PUCCH	17.6.0
2022-06	RAN#96	RP-221677	2397	1	F	CR on TRP specific CBD and BFR requirements	17.6.0
2022-06	RAN#96	RP-221682	2398	1	F	Correction to Pre-MG requirements in TS 38.133	17.6.0
2022-06	RAN#96	RP-221682	2399	1	F	Correction to NCSG requirements in TS 38.133	17.6.0
2022-06	RAN#96	RP-221677	2400	1	F	Correction to PRS measurement requirements in RRC inactive state	17.6.0
2022-06	RAN#96	RP-221655	2406		F	Big CR for TS 38.133 Core Maintenance Part-2 (Rel-17)	17.6.0
2022-06	RAN#96	RP-221655	2409		A	Big CR for TS 38.133 Core Maintenance Part-2 (Rel-17)	17.6.0
2022-06	RAN#96	RP-221660	2412		F	Big CR for TS 38.133 Perf Maintenance Part-1 (Rel-17)	17.6.0
2022-06	RAN#96	RP-221660	2415		F	Big CR for TS 38.133 Perf Maintenance Part-2 (Rel-17)	17.6.0
2022-06	RAN#96	RP-221676	2416		B	Big CR on extending NR to 71GHz for TS38.133	17.6.0
2022-06	RAN#96	RP-221661	2417		B	Big CR on RRM requirements for FR2 RF enhancement	17.6.0
2022-06	RAN#96	RP-221682	2418		B	Big CR on RRM requirements for NTN	17.6.0
2022-09	RA N#97	RP-222031	2419	2	F	CR: FR2 HST Scheduling restriction on SSB	17.7.0
2022-09	RA N#97	RP-222032	2420	1	F	CR: Power Saving Multiple RS Handling Clarification	17.7.0
2022-09	RA N#97	RP-222034	2421	1	F	Completing PUCCH SCell activation requirement	17.7.0
2022-09	RA N#97	RP-222043	2422		B	Big CR for test cases of Rel-17 FeRRM - PUCCH SCell activation (Rel-17)	17.7.0
2022-09	RA N#97	RP-222031	2423	2	F	CR on RRM core requirements for measurement procedure requirements for HST FR2	17.7.0
2022-09	RA N#97	RP-222035	2424	1	F	CR on NCSG core requirements maintenance	17.7.0
2022-09	RA N#97	RP-222032	2425	1	F	CR on PRS measurement period requirements	17.7.0
2022-09	RA N#97	RP-222032	2426	1	F	CR on PRS measurement period requirements in RRC_INACTIVE state	17.7.0
2022-09	RA N#97	RP-222050	2430		F	TS38.133 CR on SCG activation/deactivation	17.7.0
2022-09	RAN#97	RP-222035	2431	1	F	CR on measurement requirements for FR1 HST	17.7.0
2022-09	RA N#97	RP-222043	2433	1	B	CR on test case for Handover with PSCell from NR SA to EN-DC with sequential processing	17.7.0
2022-09	RA N#97	RP-222035	2434		B	CR on active TCI state switching delay	17.7.0
2022-09	RA N#97	RP-222049	2447	1	B	CR on TC for Selection_Reselection of sidelink relay UE	17.7.0

2022-09	RA/N#97	RP-222035	2448	1	F	Maintenance CR on TS38.133 for Pre-MG core part	17.7.0
2022-09	RA/N#97	RP-222035	2449	1	F	Maintenance CR on TS38.133 for concurrent gaps core part	17.7.0
2022-09	RA/N#97	RP-222035	2450	1	F	Maintenance CR on TS38.133 for NCSG core part	17.7.0
2022-09	RA/N#97	RP-222050	2453		F	Interruptions due to RRM measurements on deactivated SCG	17.7.0
2022-09	RA/N#97	RP-222050	2454	1	F	CR on T1 definition of TA validation for Rel-17 NR SDT in INACTIVE state	17.7.0
2022-09	RAN#97	RP-222053	2455		B	Big CR for SL enhancement RRM test cases	17.7.0
2022-09	RAN#97	RP-222035	2456		F	CR on Abbreviations for NTN	17.7.0
2022-09	RA/N#97	RP-222051	2457	1	F	CR on QCL-ed assumption for RSSI measurement in FR2-2	17.7.0
2022-09	RA/N#97	RP-222034	2460	1	F	38133CR on SRS antenna switching in MR-DC	17.7.0
2022-09	RA/N#97	RP-222034	2461	1	F	38133CR on PUCCH SCell activation delay	17.7.0
2022-09	RA/N#97	RP-222032	2463	1	F	CR on carrier-specific scaling factor for RedCap (9.1A.5)	17.7.0
2022-09	RA/N#97	RP-222051	2464	1	B	CR on Intra-frequency measurement requirements with CCA in FR2-2	17.7.0
2022-09	RA/N#97	RP-222032	2467	1	B	CR on applicability of requirements for RedCap Ues	17.7.0
2022-09	RA/N#97	RP-222035	2468		F	CR on TS38.133 NR NTN RRM requirements	17.7.0
2022-09	RA/N#97	RP-222051	2469	1	B	CR on TS38.133 RRM requirements in FR2-2	17.7.0
2022-09	RAN#97	RP-222032	2470	1	F	Maintenance CR for Rel-17 SL on 38.133	17.7.0
2022-09	RA/N#97	RP-222035	2471		F	Maintenance CR for Rel-17 HST in FR1 on 38.133	17.7.0
2022-09	RA/N#97	RP-222050	2472	1	F	Maintenance CR for fast scell activation on 38.133 R17	17.7.0
2022-09	RA/N#97	RP-222050	2473	1	F	Maintenance CR for SCG activation on 38.133 R17	17.7.0
2022-09	RA/N#97	RP-222036	2474		F	CR on scheduling availability for inter cell beam management	17.7.0
2022-09	RA/N#97	RP-222036	2476	1	F	CR on unified TCI in R17 feMIMO	17.7.0
2022-09	RA/N#97	RP-222036	2477	1	F	CR on inter-cell beam managements in R17 feMIMO	17.7.0
2022-09	RA/N#97	RP-222032	2479	1	F	draftCR on RedCap RLM	17.7.0
2022-09	RA/N#97	RP-222032	2480	1	F	CR on RedCap measurement	17.7.0
2022-09	RA/N#97	RP-222035	2484	1	F	CR to TS 38.133: Corrections to cell re-selection for NR UE for satellite access	17.7.0
2022-09	RA/N#97	RP-222028	2486		F	CR on Number of serving carriers in SA	17.7.0
2022-09	RA/N#97	RP-222042	2487		B	CR for testcase of UE UL carrier RRC reconfiguration in FR2	17.7.0
2022-09	RA/N#97	RP-222035	2488	1	F	CR to TS 38.133: Corrections to UE transmit timing and timing advance for satellite access	17.7.0
2022-09	RA/N#97	RP-222035	2489	1	F	CR for concurrent measurement gaps	17.7.0
2022-09	RA/N#97	RP-222035	2490		F	CR for remaining aspects of NCSG measurement gaps (section 8 and 9)	17.7.0
2022-09	RA/N#97	RP-222050	2493	1	F	CR on Efficient activation/de-activation mechanism for one SCG	17.7.0
2022-09	RA/N#97	RP-222048	2494	1	F	DraftCR TC#13 PSCell activation and deactivation delay	17.7.0
2022-09	RA/N#97	RP-222034	2496		F	CR on SRS antenna port switching requirements 36.133 NOTE This CR is not implemented due to being a CR number for 38.133 but the spec is 36.133	17.7.0
2022-09	RA/N#97	RP-222042	2498	1	B	Test case for R17 Tx switching enhancement	17.7.0
2022-09	RA/N#97	RP-222050	2500	1	F	Correction on efficient activation for one SCG	17.7.0
2022-09	RAN#97	RP-222032	2501	1	F	Correction on Ranking for 1RX RedCap UE	17.7.0
2022-09	RAN#97	RP-222032	2502	1	F	Correction on Trs definition for RedCap UE	17.7.0
2022-09	RA/N#97	RP-222032	2503		F	Clarification on SSB in RLM and BFD for RedCap UE	17.7.0
2022-09	RA/N#97	RP-222032	2505	1	F	Correction on measurement with eDRX for RedCap UE	17.7.0
2022-09	RA/N#97	RP-222032	2506	1	F	CR on higher priority inter-frequency measurement relaxation for RedCap	17.7.0
2022-09	RA/N#97	RP-222032	2507	1	F	Corrections on measurement relaxations mixed with eDRX for Redcap UE	17.7.0
2022-09	RA/N#97	RP-222035	2508		F	CR on the enhancement for inter-frequency measurement in idle mode for HST	17.7.0
2022-09	RA/N#97	RP-222050	2509	1	F	CR on SCG activation delay and intra-frequency measurement	17.7.0
2022-09	RA/N#97	RP-222051	2510	1	B	CR on introduction of cell Re-selection, inter-frequency and intra-frequency measurments requirements for FR2-2	17.7.0
2022-09	RA/N#97	RP-222035	2512	1	F	Corrections to Pre-configured MG	17.7.0
2022-09	RA/N#97	RP-222035	2513		F	Corrections to deriveSSB-IndexFromCellInter parameter naming	17.7.0
2022-09	RA/N#97	RP-222036	2514		F	CR to TS38.133 Corrections on R17 unified TCI state switching requirement	17.7.0
2022-09	RA/N#97	RP-222032	2517	1	F	CR to 38.133 scheduling restriction when PRS has lower priority than other DL signals/CCs	17.7.0
2022-09	RA/N#97	RP-222032	2518	1	F	CR to 38.133 clarification on measurement period requirement in RRC INACTIVE state	17.7.0
2022-09	RA/N#97	RP-222032	2522	1	F	Changes to SDT requirements for NR RedCap	17.7.0
2022-09	RA/N#97	RP-222035	2524	1	F	CR on UE transmit timing requirements for NTN	17.7.0
2022-09	RA/N#97	RP-222032	2525	1	F	CR on maintaining RLM/BFD relaxation requirements	17.7.0
2022-09	RA/N#97	RP-222032	2526	1	F	CR on maintaining RRM core requirements for R17 NR SL	17.7.0
2022-09	RA/N#97	RP-222036	2527	1	F	CR on maintaining TCI state switching requirements for R17 unified TCI	17.7.0
2022-09	RA/N#97	RP-222036	2529	1	F	CR on maintaining R17 TRP specific BFR requirements	17.7.0
2022-09	RAN#97	RP-222035	2530	1	F	CR on pre-MG related requirements	17.7.0
2022-09	RAN#97	RP-222035	2531	1	F	CR on concurrent MG related requirements	17.7.0

2022-09	RA\N#97	RP-222035	2532	1	F	CR on maintenance of NCSG requirements	17.7.0
2022-09	RA\N#97	RP-222035	2533	1	F	CR on on other RRM requirements for NTN	17.7.0
2022-09	RA\N#97	RP-222035	2534	1	F	CR on intra-frequency measurement requirements for NTN	17.7.0
2022-09	RA\N#97	RP-222035	2535	1	F	CR on cell reselection requirements for NTN	17.7.0
2022-09	RA\N#97	RP-222032	2536	1	F	CR on measurement period requirements with multiple Rx TEGs	17.7.0
2022-09	RA\N#97	RP-222032	2538	1	F	CR on applicability of measurement requirements with POS MG	17.7.0
2022-09	RA\N#97	RP-222032	2539	1	F	CR on PRS measurement requirements in INACTIVE	17.7.0
2022-09	RA\N#97	RP-222036	2543	1	F	CR on requirements for UE Rx-Tx measurement for PDC	17.7.0
2022-09	RA\N#97	RP-222050	2544	1	F	CR on SDT RRM requirements	17.7.0
2022-09	RA\N#97	RP-222032	2545	1	F	CR on TS38.133 for applicability of RLM measurement relaxation	17.7.0
2022-09	RA\N#97	RP-222032	2546	1	F	CR on RedCap maintenance in TS 38.133	17.7.0
2022-09	RA\N#97	RP-222036	2547		F	CR on reporting mapping for URLLC in TS 38.133	17.7.0
2022-09	RA\N#97	RP-222036	2548		F	Formal CR to 38.133: Corrections on MUSIM gaps	17.7.0
2022-09	RA\N#97	RP-222032	2549	1	F	CR to 38.133 clarification on measurement period requirements in RRC_CONNECTED state	17.7.0
2022-09	RA\N#97	RP-222050	2553	1	F	Formal CR on Rel-17 SCG activation requirements	17.7.0
2022-09	RA\N#97	RP-222036	2557	1	F	CR on unified TCI state switching requirements	17.7.0
2022-09	RA\N#97	RP-222036	2558	1	F	Maintenance CR on inter-cell beam management	17.7.0
2022-09	RAN#97	RP-222036	2559		F	CR on corrections for TRP specific BFR	17.7.0
2022-09	RAN#97	RP-222034	2560	1	F	CR on correction of fine timing for HO with PSCell when PSCell is on CCA in NR SA to EN-DC scenario	17.7.0
2022-09	RA\N#97	RP-222035	2563	1	F	Correction to NCSG core requirements	17.7.0
2022-09	RA\N#97	RP-222035	2564		F	Satellite access band grouping for RRM requirements in TS 38.133	17.7.0
2022-09	RA\N#97	RP-222055	2565		B	Big CR for NR positioning enh RRM (Rel-17)	17.7.0
2022-09	RA\N#97	RP-222049	2566		B	BigCR for R17 NR_SL_relay tests	17.7.0
2022-09	RA\N#97	RP-222032	2567		F	CR for RRM relaxation on R16 not at cell edge and R17 stationary for idle and inactive state mobility for Redcap	17.7.0
2022-09	RA\N#97	RP-222023	2570		F	Big CR for 38.133 maintenance part1 (Rel-17)	17.7.0
2022-09	RA\N#97	RP-222558	2572	1	F	Big CR for 38.133 maintenance part2 (Rel-17)	17.7.0
2022-09	RA\N#97	RP-222041	2573		B	Big CR for NR HST FR1 (Rel-17)	17.7.0
2022-09	RA\N#97	RP-222041	2574		B	Big CR for NR HST FR2 (Rel-17)	17.7.0
2022-09	RA\N#97	RP-222043	2575		B	Big CR for test cases of Rel-17 FeRRM - SRS antenna port switching (Rel-17)	17.7.0
2022-09	RA\N#97	RP-222043	2576	1	B	Big CR for test cases of Rel-17 FeRRM - HO with PSCell (Rel-17)	17.7.0
2022-09	RA\N#97	RP-222043	2577		B	Big CR for NR MG enh (Rel-17)	17.7.0
2022-09	RA\N#97	RP-222046	2578		B	Big CR for NR NTN solutions RRM (Rel-17)	17.7.0
2022-09	RA\N#97	RP-222047	2579		B	Big CR for NR UE power saving enh (Rel-17)	17.7.0
2022-09	RA\N#97	RP-222051	2580		B	Big CR for NR extending to 71GHz RRM (Rel-17)	17.7.0
2022-09	RA\N#97	RP-222052	2581		B	Big CR for NR feMIMO RRM (Rel-17)	17.7.0
2022-09	RA\N#97	RP-222056	2582		B	Big CR for NR RedCap RRM (Rel-17)	17.7.0
2022-09	RAN#97	RP-222048	2583		B	Big CR for MR-DC enh RRM (Rel-17)	17.7.0
2022-09	RAN#97	RP-222045	2584		F	Big CR for NR IIoT and URLLC enh (Rel-17)	17.7.0
2022-09	RAN#97	RP-222541	2586	2	F	Changes Idle mode requirements for NR RedCap	17.7.0
2022-12	RAN#98-e	RP-223306	2593	1	F	CR on correction to cell re-selection requirement for satellite access	17.8.0
2022-12	RAN#98-e	RP-223306	2594	1	F	CR on scheduling restrictions for L3 measurements in FR1 for NTN	17.8.0
2022-12	RAN#98-e	RP-223307	2597	1	F	CR on scheduling restrictions for L3 measurements in FR1 for RedCap	17.8.0
2022-12	RAN#98-e	RP-223306	2598	1	F	CR on intra-frequency and inter-frequency measurement requirement without MG for NTN	17.8.0
2022-12	RAN#98-e	RP-223306	2600		F	Correction on requirements for TRP specific link recovery procedures	17.8.0
2022-12	RAN#98-e	RP-223306	2603		F	CR on applicability of R17 inter cell beam management for FR2-2	17.8.0
2022-12	RAN#98-e	RP-223306	2604	1	F	CR on cell re-selection, MDT and timing requirements for NTN	17.8.0
2022-12	RAN#98-e	RP-223307	2612		F	CR on RLM requirements for FR2-2	17.8.0
2022-12	RAN#98-e	RP-223307	2613	1	F	CR on SCell activation requirements of FR2-2	17.8.0
2022-12	RAN#98-e	RP-223307	2614	1	F	CR on LBT assumption for FR2-2	17.8.0
2022-12	RAN#98-e	RP-223307	2615	1	F	CR on RSSI measurement for FR2-2	17.8.0
2022-12	RAN#98-e	RP-223307	2618	1	F	Correction to idle measurement requirements for RedCap Ues	17.8.0
2022-12	RAN#98-e	RP-223307	2620	1	F	Clarification on measurement for inactive mode RedCap UE	17.8.0
2022-12	RAN#98-e	RP-223307	2621	1	F	Correction on relaxed measurement for RedCap	17.8.0
2022-12	RAN#98-e	RP-223306	2623	1	F	CR on UL spatial relation switch requirements for NTN	17.8.0
2022-12	RAN#98-e	RP-223306	2624	1	F	CR on RLM and BFR requirements for NTN	17.8.0
2022-12	RAN#98-e	RP-223306	2625	1	F	CR on MG requirements for NTN	17.8.0
2022-12	RAN#98-e	RP-223306	2627	1	F	CR on SDT RRM requirements	17.8.0
2022-12	RAN#98-e	RP-223306	2630	1	B	Requirements for DRX case	17.8.0
2022-12	RAN#98-e	RP-223307	2631		F	CR on RedCap eDRX	17.8.0
2022-12	RAN#98-e	RP-223306	2634	1	F	CR for Cell Reselection requirements with distance trigger	17.8.0
2022-12	RAN#98-e	RP-223306	2636	1	F	CR on SFN based RLM and LRP	17.8.0
2022-12	RAN#98-e	RP-223306	2641	1	D	Editorial CR To TS 38.133 Handover requirements	17.8.0
2022-12	RAN#98-e	RP-223307	2644	1	F	Changes to RRC_IDLE mode requirements for RedCap for TS 38.133	17.8.0

2022-12	RAN#98-e	RP-223306	2647	1	F	Maintenance CR on inter-cell BM	17.8.0
2022-12	RAN#98-e	RP-223303	2652		B	Big CR for NTN RRM performance requirements	17.8.0
2022-12	RAN#98-e	RP-223302	2655		B	Big CR for NR IIoT and URLLC enh performance requirements	17.8.0
2022-12	RAN#98-e	RP-223304	2656		B	Big CR for NR SDT performance requirements	17.8.0
2022-12	RAN#98-e	RP-223311	2625	3	F	CR on MG requirements for NTN	17.8.0
2022-12	RAN#98-e	RP-223311	2630	2	B	Requirements for DRX case	17.8.0
2022-12	RAN#98-e	RP-223299	2653	1	B	Big CR for NR operation to 71GHz RRM performance requirements Note: Partially implemented; some clauses had no revision marks and no changes were implemented on these clauses	17.8.0
2022-12	RAN#98-e	RP-223297	2661		A	CR to TS 38.133: Corrections to NR positioning and high speed train test cases (Rel 17)	17.8.0
2022-12	RAN#98-e	RP-223290	2664		A	CR on NR RRM maintenance R17	17.8.0
2022-12	RAN#98-e	RP-223309	2665	1	F	CR on CG-SDT with RedCap eDRX R17	17.8.0
2022-12	RAN#98-e	RP-223310	2666	1	F	CR on NCSG test case	17.8.0
2022-12	RAN#98-e	RP-223310	2667	1	F	CR on R17 HST test case - SA event triggered reporting tests without gap under DRX for UE configured with highSpeedMeasCA-Scell-r17	17.8.0
2022-12	RAN#98-e	RP-223308	2669		F	CR on removing the redundancy from TS 38.133 in response to RAN2 LS	17.8.0
2022-12	RAN#98-e	RP-223290	2671		A	Editorial CR on scheduling restrictions for L3 measurements in FR2 (Rel-17)	17.8.0
2022-12	RAN#98-e	RP-223309	2672	1	F	CR for Unified TCI State switching requirements	17.8.0
2022-12	RAN#98-e	RP-223309	2673	1	F	CR for Inter-cell Beam Management	17.8.0
2022-12	RAN#98-e	RP-223292	2676		A	CR to CSI-RS, RLM and BWP switching in annex	17.8.0
2022-12	RAN#98-e	RP-223292	2679		A	Update on Scell activation and deactivation and Control Channel RMC for RLM FR2 (Rel-17)	17.8.0
2022-12	RAN#98-e	RP-223292	2682		A	Update to L1-RSRP test scenarios (Rel-17)	17.8.0
2022-12	RAN#98-e	RP-223298	2683	1	F	CR on Tidentify_inter_without_index when deriveSSB-IndexFromCellInter is configured	17.8.0
2022-12	RAN#98-e	RP-223297	2686		A	Modification on TS38.133 for Rel-16	17.8.0
2022-12	RAN#98-e	RP-223297	2691		A	CR on positioning measurement accuracy requirements in R16	17.8.0
2022-12	RAN#98-e	RP-223292	2695		A	R17 Cat-A CR testcase correction from R15 TS 38.133	17.8.0
2022-12	RAN#98-e	RP-223292	2697		A	R17 Cat-A CR testcase correction from R16 TS 38.133	17.8.0
2022-12	RAN#98-e	RP-223309	2699	1	F	CR on QCL-ed assumption for inter-frequency RSSI measurement in FR2-2	17.8.0
2022-12	RAN#98-e	RP-223292	2702		A	CR on test case correction for timing advance	17.8.0
2022-12	RAN#98-e	RP-223296	2705		A	38133 Cat. A CR on SRS configuration for SRS carrier based switching	17.8.0
2022-12	RAN#98-e	RP-223310	2708	1	F	CR on TC for R17 HST CA enhancement on deactivated SCell (EN-DC) in FR1	17.8.0
2022-12	RAN#98-e	RP-223292	2711		A	CR on TC for known PSCell addition in R17	17.8.0
2022-12	RAN#98-e	RP-223292	2714		A	CR on TC for inter-RAT NR Cell reselection in R17	17.8.0
2022-12	RAN#98-e	RP-223311	2715	2	F	CR to TS 38.133 Correction to measurements core requirements for PDC	17.8.0
2022-12	RAN#98-e	RP-223308	2720		F	CR to TS 38.133 Correction to conditional PSCell addition requirements(Rel-17)	17.8.0
2022-12	RAN#98-e	RP-223308	2721	1	F	CR on RLM/BFD requirement for deactivated PSCell and SCG Activation Delay requirement	17.8.0
2022-12	RAN#98-e	RP-223309	2723	1	F	CR on corrections to RedCap Core requirements	17.8.0
2022-12	RAN#98-e	RP-223311	2725		F	CR on intra-frequency cell reselection in NTN	17.8.0
2022-12	RAN#98-e	RP-223311	2726		F	CR on intra-frequency measurements in NTN	17.8.0
2022-12	RAN#98-e	RP-223310	2727		B	Big CR for NR feMIMO RRM performance requirements	17.8.0
2022-12	RAN#98-e	RP-223302	2730		B	BigCR to 38.133: measurement accuracy requirements for RTT-based PDC	17.8.0
2022-12	RAN#98-e	RP-223311	2731	1	F	CR on correction to CHO requirement for satellite access	17.8.0
2022-12	RAN#98-e	RP-223311	2732	1	F	CR on correction to cell re-selection requirement for satellite access	17.8.0
2022-12	RAN#98-e	RP-223296	2734		A	Correction of L1 L3 measurement measurement sharing factors for inter-frequency L3 measurement performed outside gaps in R17	17.8.0
2022-12	RAN#98-e	RP-223310	2735	1	F	L1-SINR and SS-SINR measurement accuracy requirements in R17 FR1 HST	17.8.0
2022-12	RAN#98-e	RP-223309	2737	2	F	CR on R17 feMIMO RRM requirements	17.8.0
2022-12	RAN#98-e	RP-223309	2739		F	CR on cell reselection requirements for FR2-2	17.8.0
2022-12	RAN#98-e	RP-223309	2741	1	F	CR on maintaining RRM requirements for R17 FeMIMO	17.8.0
2022-12	RAN#98-e	RP-223309	2746		F	Correction on measurement requirements for RedCap UE	17.8.0
2022-12	RAN#98-e	RP-223293	2749		A	Correction on Aperiodic CSI-RS RMCs and RLM in-sync test cases for R17	17.8.0
2022-12	RAN#98-e	RP-223311	2750	1	F	Corrections to Rel.17 positioning test cases	17.8.0
2022-12	RAN#98-e	RP-223311	2754		F	CR on Clarification of Ttrigger Requirements for Cell Reselection	17.8.0
2022-12	RAN#98-e	RP-223297	2757		A	CR on positioning requirements R17	17.8.0
2022-12	RAN#98-e	RP-223311	2758	1	F	CR on core requirements for Rel-17 positioning	17.8.0
2022-12	RAN#98-e	RP-223311	2759	1	F	CR on performance requirements for Rel-17 positioning	17.8.0
2022-12	RAN#98-e	RP-223311	2760	1	F	CR on RRC re-establishment requirements for NTN	17.8.0

2022-12	RAN#98-e	RP-223311	2762	1	F	CR on L1-RSRP measurement requirements	17.8.0
2022-12	RAN#98-e	RP-223309	2764	1	F	CR on conditions for PL-RS maintenance	17.8.0
2022-12	RAN#98-e	RP-223310	2765	2	F	CR to 38.133 on Rel-17 HST FR2 RRM Requirements	17.8.0
2022-12	RAN#98-e	RP-223311	2766	1	F	CR - Corrections to core requirements for NR positioning	17.8.0
2022-12	RAN#98-e	RP-223310	2767		F	Pre-MG test case No 1-1	17.8.0
2022-12	RAN#98-e	RP-223311	2768	2	F	Performance requirements for PRS Measurement with reduced number of samples	17.8.0
2022-12	RAN#98-e	RP-223311	2769	1	F	CR on R17 positioning measurement accuracy requirements	17.8.0
2022-12	RAN#98-e	RP-223301	2770		B	Big CR for Performance part of RedCap - TS 38.133	17.8.0
2022-12	RAN#98-e	RP-223308	2772		A	Correction to Idle Mode CA/DC Measurement Tests in TS 38.133	17.8.0
2022-12	RAN#98-e	RP-223308	2776	1	F	Formal CR to 38.133 Corrections on Handover with PSCell from NR SA to EN-DC with PSCell using CCA	17.8.0
2022-12	RAN#98-e	RP-223309	2777		F	CR on RedCap maintenance in TS 38.133	17.8.0
2022-12	RAN#98-e	RP-223297	2779		A	CR on Rel-17 measurements and UE specific CBW switch maintenance	17.8.0
2022-12	RAN#98-e	RP-223308	2780	1	F	Maintenance CR on SCell activation/deactivation with PUCCH	17.8.0
2022-12	RAN#98-e	RP-223309	2784	1	B	CR on measurement procedures for RedCap UEs	17.8.0
2022-12	RAN#98-e	RP-223309	2785	1	F	CR on timing requirements with measurement gaps for RedCap UEs	17.8.0
2022-12	RAN#98-e	RP-223309	2786	1	B	CR on RRC Connection mobility control	17.8.0
2022-12	RAN#98-e	RP-223309	2787	1	B	CR on Measurement Procedures	17.8.0
2022-12	RAN#98-e	RP-223298	2788		F	CR to TS 38.133: Remedy the incorrect implementation in the section 4.2.2.4	17.8.0
2022-12	RAN#98-e	RP-223303	2789		B	Big CR for NR NTN RRM performance requirements	17.8.0
2022-12	RAN#98-e	RP-223304	2790		B	Big CR for NR small data transmissions in INACTIVE state RRM performance requirements	17.8.0
2023-03	RAN#99	RP-230514	2791	1	F	CR on R17 FeMIMO for scheduling restriction in inter cell beam management in R17	17.9.0
2023-03	RAN#99	RP-230504	2795		A	CR on TC for FR2 inter-frequency relative accuracy in R17	17.9.0
2023-03	RAN#99	RP-230504	2799		A	CR on TC for known PSCell addition in R17	17.9.0
2023-03	RAN#99	RP-230504	2803		A	CR to SNR on RLM-RS2 for FR2 CSI-RS based RLM OOS/IS tests	17.9.0
2023-03	RAN#99	RP-230506	2807		A	CR to SNR of q0 level for BFD and LR in FR2	17.9.0
2023-03	RAN#99	RP-230504	2811		A	CR to ConfigNo of SSB Configuration and CSI-RS for tracking in redirection test	17.9.0
2023-03	RAN#99	RP-230514	2816		F	CR for Unified TCI State switching requirements	17.9.0
2023-03	RAN#99	RP-230514	2817		F	CR on L3-RSSI measurement for NR up to 71GHz	17.9.0
2023-03	RAN#99	RP-230518	2821	1	F	CR on NR RedCap measurement requirement in IDLE mode with eDRX R17	17.9.0
2023-03	RAN#99	RP-230516	2824		F	CR on SMTC collision	17.9.0
2023-03	RAN#99	RP-230505	2827		A	R17 Cat-A CR CLI measurement testcase correction	17.9.0
2023-03	RAN#99	RP-230505	2830		A	R17 Cat-A CR SA NR-LTE HO testcase correction	17.9.0
2023-03	RAN#99	RP-230514	2834		F	CR for Unified TCI State switching requirements for UL	17.9.0
2023-03	RAN#99	RP-230518	2836	1	F	CR on CG-SDT test cases for RedCap UEs	17.9.0
2023-03	RAN#99	RP-230519	2838	1	F	CR correction of SDT test cases	17.9.0
2023-03	RAN#99	RP-230517	2840	1	F	CR on requirements applicability of PRS measurement	17.9.0
2023-03	RAN#99	RP-230507	2842	1	F	CR on PUCCH SCell activation requirement	17.9.0
2023-03	RAN#99	RP-230516	2844	1	F	CR on clarification for UE acquiring system information during handover	17.9.0
2023-03	RAN#99	RP-230517	2846	1	F	CR on the applicability of timing error margin in positioning accuracy requirements	17.9.0
2023-03	RAN#99	RP-230506	2849		A	CR on positioning test case in R16	17.9.0
2023-03	RAN#99	RP-230519	2853	1	F	CR on FR2 PSCell SSB-based BFD and CBD test maintenance for UE fulfilling relaxed measurement criterion	17.9.0
2023-03	RAN#99	RP-230499	2858		A	Sidelink R16 resource selection test configuration correction R17 mirror	17.9.0
2023-03	RAN#99	RP-230519	2860		F	Sidelink R17 resource selection test configuration correction	17.9.0
2023-03	RAN#99	RP-230514	2865		A	FR1 HST L1-RSRP test configuration correction R17 mirror	17.9.0
2023-03	RAN#99	RP-230509	2867	1	F	CR on scheduling restriction when deriveSSB-IndexFromCellInter is configured	17.9.0
2023-03	RAN#99	RP-230516	2869	1	F	Maintenance CR on cell reselection requirements for satellite access	17.9.0
2023-03	RAN#99	RP-230512	2870	1	F	CR for R17 MR-DC Enh on 38.133	17.9.0
2023-03	RAN#99	RP-230519	2874	1	F	CR on test case for R17 SL in SL-DRX mode	17.9.0
2023-03	RAN#99	RP-230500	2877		A	Correction on TCs for direct scell activation in R17(Cat-A)	17.9.0
2023-03	RAN#99	RP-230514	2879	1	F	CR on RRM core requirements of FeMIMO	17.9.0
2023-03	RAN#99	RP-230516	2881	1	F	Maintenance core part CR on of MG enh R17	17.9.0
2023-03	RAN#99	RP-230516	2883	1	F	Maintenance perf part CR on of MG enh R17	17.9.0
2023-03	RAN#99	RP-230516	2888		F	CR on editorial change for CSI-RS based intra-frequency measurements	17.9.0
2023-03	RAN#99	RP-230515	2895	1	F	CR to 38.133 on Rel-17 HST FR2 RRM and Measurement Accuracy	17.9.0
2023-03	RAN#99	RP-230516	2898	1	F	CR to 38.133: Complement the assistance information for NTN neighbour cell measurement	17.9.0

2023-03	RAN#99	RP-230514	2900		F	CR on applicability of requirements for measurement restriction	17.9.0
2023-03	RAN#99	RP-230515	2901		F	CR on R17 HST FR2 test case of SSB based L1-RSRP measurement	17.9.0
2023-03	RAN#99	RP-230516	2902	1	F	CR on R17 Measurement Gap enhancement	17.9.0
2023-03	RAN#99	RP-230507	2907		F	Correction on SRS configurations for SRS antenna switching test cases in R17	17.9.0
2023-03	RAN#99	RP-230507	2910		A	CR on TC maintenance for NR-U R17	17.9.0
2023-03	RAN#99	RP-230510	2914		F	CR on CCA model for FR2-2 R17	17.9.0
2023-03	RAN#99	RP-230510	2916		F	CR on test case maintenance for FR2-2 R17	17.9.0
2023-03	RAN#99	RP-230518	2922		F	Correction on measurement requirements with eDRX for RedCap UE R17	17.9.0
2023-03	RAN#99	RP-230518	2924	1	F	Correction on measurement requirement in idle mode and connected mode for RedCap UE	17.9.0
2023-03	RAN#99	RP-230518	2926		F	Correction to FR2 RedCap test cases_R17	17.9.0
2023-03	RAN#99	RP-230518	2928	1	F	Correction to RedCap RMCs and FR1 RedCap test cases_R17	17.9.0
2023-03	RAN#99	RP-230519	2932	1	F	Adding relaxation factor on measurement relaxation requirements R17	17.9.0
2023-03	RAN#99	RP-230506	2935		A	PRS measurement period for Deferred MT-LR with event "Periodic Location"	17.9.0
2023-03	RAN#99	RP-230509	2937		F	Correction of table reference for NR Timing Advance	17.9.0
2023-03	RAN#99	RP-230517	2939	1	F	CR to 38.133 correction of measurement period requirements for positioning measurements	17.9.0
2023-03	RAN#99	RP-230517	2941	1	F	CR to 38.133 performance requirements for positioning measurements	17.9.0
2023-03	RAN#99	RP-230503	2945		A	CR on measurement requirements with per-FR gap R17	17.9.0
2023-03	RAN#99	RP-230506	2951		A	CR on positioning test cases R17	17.9.0
2023-03	RAN#99	RP-230506	2954		A	CR on positioning accuracy requirements R17	17.9.0
2023-03	RAN#99	RP-230516	2956	1	F	CR on pre-MG related requirements	17.9.0
2023-03	RAN#99	RP-230516	2958	1	F	CR on NCSG related requirements	17.9.0
2023-03	RAN#99	RP-230516	2960	1	F	CR on HO requirements for NTN	17.9.0
2023-03	RAN#99	RP-230516	2962	1	F	CR on MG requirements for NTN	17.9.0
2023-03	RAN#99	RP-230517	2964	1	F	CR on PRS measurement requirements for INACTIVE	17.9.0
2023-03	RAN#99	RP-230517	2968	1	F	CR on accuracy requirements for Rel-17 positioning	17.9.0
2023-03	RAN#99	RP-230515	2970	1	F	CR on requirements for UE Rx-Tx measurement for PDC	17.9.0
2023-03	RAN#99	RP-230515	2972		F	CR on TCs for PDC measurement	17.9.0
2023-03	RAN#99	RP-230519	2974	2	F	CR on SDT RRM test case for FR2	17.9.0
2023-03	RAN#99	RP-230507	2977	1	F	Correction to CBW change TCs_R17	17.9.0
2023-03	RAN#99	RP-230513	2983		A	CR on correction of eMIMO test cases R17	17.9.0
2023-03	RAN#99	RP-230514	2985	1	F	CR on maintaining RRM requirements for NR FeMIMO R17	17.9.0
2023-03	RAN#99	RP-230515	2989	2	F	CR on test cases for HST FR1	17.9.0
2023-03	RAN#99	RP-230518	2991	1	F	CR on NR RedCap Idle mode	17.9.0
2023-03	RAN#99	RP-230518	2993	2	F	CR on NR RedCap measurement	17.9.0
2023-03	RAN#99	RP-230518	3005	1	F	Corrections to cell reselection, CG-SDT for RedCap	17.9.0
2023-03	RAN#99	RP-230518	3007	1	F	Corrections to inter-frequency NR and inter-RAT E-UTRAN measurements for RedCap	17.9.0
2023-03	RAN#99	RP-230518	3013	1	F	Formal CR to Rel-17 TS 38.133: on missing Rel-16 relaxation for RedCap IDLE mode	17.9.0
2023-03	RAN#99	RP-230516	3017	1	F	CR on TS 38.133 (Rel-17) Corrections on cell reselection for NTN (CAT. F)	17.9.0
2023-03	RAN#99	RP-230519	3019	1	F	Formal CR to Rel-17 38.133: correction on CG-SDT transmission	17.9.0
2023-03	RAN#99	RP-230518	3021		F	Correction to RedCap test cases	17.9.0
2023-03	RAN#99	RP-230515	3027	1	F	CR to 38.133 on Rel-17 HST FR2 UL TX Timing	17.9.0
2023-03	RAN#99	RP-230507	3038		F	CR on SRS antenna port switching corrections in TS38.133 R17	17.9.0
2023-03	RAN#99	RP-230516	3042		F	CR Removal of editors note from concurrent gaps	17.9.0
2023-03	RAN#99	RP-230513	3043		F	Correction to FR1 band groups in 38.133	17.9.0
2023-03	RAN#99	RP-230513	3045	4	F	Conditions for missing FR2 band and power class for positioning in 38.133	17.9.0
2023-03	RAN#99	RP-230500	3050		A	Correction to Idle Mode CA/DC Measurement Tests in TS 38.133	17.9.0
2023-03	RAN#99	RP-230517	3058	1	F	CR - Correction to UE scheduling availability for PRS measurements without gaps	17.9.0
2023-03	RAN#99	RP-230510	3064	1	B	CR on TC - L1 RSRP measurement for beam reporting	17.9.0
2023-03	RAN#99	RP-230507	3069		A	CR on RLM OOS and IS tests with no DRX in NR-U standalone mode	17.9.0
2023-03	RAN#99	RP-230507	3070		A	CR on BFD and LR tests in NR-U standalone mode	17.9.0
2023-03	RAN#99	RP-230505	3078		A	CR to TS 38.133: Corrections to NR RRM test cases (Rel 17)	17.9.0
2023-03	RAN#99	RP-230506	3081		A	CR to TS 38.133: Corrections to NR positioning requirements (Rel 17)	17.9.0
2023-03	RAN#99	RP-230518	3083		F	CR to TS 38.133: Corrections to NR RedCap test cases (Rel 17)	17.9.0
2023-03	RAN#99	RP-230515	3085		F	FR2 HST TCI state switch test case maintenance CR	17.9.0
2023-03	RAN#99	RP-230518	3086	1	F	CR on active BWP switch test cases	17.9.0
2023-03	RAN#99	RP-230506	3094		A	CR to TS38.133: Revise the Measured quantity value(ZoA)	17.9.0
2023-03	RAN#99	RP-230506	3096		A	CR to TS38.133:Revise the abbreviation of AoA, A-AoA and ZoA	17.9.0
2023-03	RAN#99	RP-230511	3103		F	Big CR for NR NTN RRM performance requirements (Rel-17)	17.9.0

2023-06	RAN#100	RP-231358	3111	1	F	CR on relationship between SNR, RSRP level and thresholds for FR1 BFD and LR	17.10.0
2023-06	RAN#100	RP-231357	3115		A	CR (CAT-A) on R15 NR Inter-RAT measurements testcase correction	17.10.0
2023-06	RAN#100	RP-231346	3117		F	CR on R17 TRP specific BFD testcase correction	17.10.0
2023-06	RAN#100	RP-231357	3123		A	CR to TS 38.133: Corrections to NR RRM test cases (Rel 17)	17.10.0
2023-06	RAN#100	RP-231354	3129		A	Corrections to RRM HST A.6.1.1.7 (Rel-17)	17.10.0
2023-06	RAN#100	RP-231354	3139		A	Update to RRM idle mode HST test cases	17.10.0
2023-06	RAN#100	RP-231357	3142		A	CR to FR2 RLM In-syn test cases (Cat-A Rel-17)	17.10.0
2023-06	RAN#100	RP-231341	3144	1	F	CR on updates for R17 per-FR gap capability	17.10.0
2023-06	RAN#100	RP-231343	3146	1	F	38.133 CR on PUCCH SCell activation delay requirement	17.10.0
2023-06	RAN#100	RP-231345	3148	1	F	CR on R17 positioning performance requirements	17.10.0
2023-06	RAN#100	RP-231355	3156		A	CR of known cell condition for HO on 38.133 R17	17.10.0
2023-06	RAN#100	RP-231341	3160		A	Clarification on MRTD/MTTD and interruption requirement for EN-DC in Rel-17	17.10.0
2023-06	RAN#100	RP-231340	3162		F	CR on Interruption requirements due to SCG activation/deactivation	17.10.0
2023-06	RAN#100	RP-231344	3167		F	CR on measurement capability for NR NTN	17.10.0
2023-06	RAN#100	RP-231350	3173		F	CR on test cases for HST FR1	17.10.0
2023-06	RAN#100	RP-231344	3175		D	CR for editorial modification for 4.2C.2.3 Measurements of intra-frequency NR cells in 38.133	17.10.0
2023-06	RAN#100	RP-231341	3177		F	CR on UE capability when deriveSSB-IndexFromCellInter is configured	17.10.0
2023-06	RAN#100	RP-231350	3191	1	F	CR on eDRX requirements	17.10.0
2023-06	RAN#100	RP-231346	3193	1	F	CR on maintenance of FeMIMO RRM requirements in R17	17.10.0
2023-06	RAN#100	RP-231357	3197		A	Correction to inter-RAT NR measurement TCs R17	17.10.0
2023-06	RAN#100	RP-231357	3201		A	Correction to inter-frequency NR measurement TCs R17	17.10.0
2023-06	RAN#100	RP-231343	3204		A	Correction to UE specific CBW RMCs R17	17.10.0
2023-06	RAN#100	RP-231350	3206	1	F	Correction to FR1 RedCap test cases RMCs and side conditions	17.10.0
2023-06	RAN#100	RP-231350	3208		F	Correction to FR2 RedCap test cases R17	17.10.0
2023-06	RAN#100	RP-231347	3213	1	F	CR on Random access on carrier with CCA in FR2-2 R17	17.10.0
2023-06	RAN#100	RP-231347	3215		F	CR on test case maintenance for FR2-2 R17	17.10.0
2023-06	RAN#100	RP-231354	3222		F	Correction on Nserv for FR2 HST	17.10.0
2023-06	RAN#100	RP-231340	3224	1	F	Clause number update for MRDC	17.10.0
2023-06	RAN#100	RP-231344	3226		F	CR on Cell Reselection for RRC Inactive in NTN (Cat. F)	17.10.0
2023-06	RAN#100	RP-231344	3228	1	F	CR on Duration for reselection test cases in NGSO scenarios (Cat. F)	17.10.0
2023-06	RAN#100	RP-231350	3230		F	CR: Correction of Measurement conditions for RedCap for 1Rx	17.10.0
2023-06	RAN#100	RP-231350	3232		F	CR on NR RedCap L1-RSRP measurement	17.10.0
2023-06	RAN#100	RP-231350	3234	1	F	CR on NR RedCap HO	17.10.0
2023-06	RAN#100	RP-231343	3236	1	F	CR on ConMGs' association	17.10.0
2023-06	RAN#100	RP-231343	3241	2	F	Maintenance core part CR on of MG enh R17	17.10.0
2023-06	RAN#100	RP-231343	3243	1	F	Maintenance perf part CR on of MG enh R17	17.10.0
2023-06	RAN#100	RP-231344	3251		F	CR on NTN specific parameters configuration for NTN test cases	17.10.0
2023-06	RAN#100	RP-231340	3256		A	CR on direct SCell activation requirements R17	17.10.0
2023-06	RAN#100	RP-231343	3258		F	CR on NCSG related requirements	17.10.0
2023-06	RAN#100	RP-231343	3260	1	F	CR on concurrent MG related requirements	17.10.0
2023-06	RAN#100	RP-231344	3262	1	F	CR on mobility requirements for NTN	17.10.0
2023-06	RAN#100	RP-231344	3264		F	CR on MG requirements for NTN	17.10.0
2023-06	RAN#100	RP-231345	3266		F	CR on PRS measurement requirements for INACTIVE	17.10.0
2023-06	RAN#100	RP-231345	3268	1	F	CR on measurement requirements for TEG	17.10.0
2023-06	RAN#100	RP-231345	3270	1	F	CR on accuracy requirements for Rel-17 positioning	17.10.0
2023-06	RAN#100	RP-231343	3272	1	F	CR on SDT RRM test case	17.10.0
2023-06	RAN#100	RP-231358	3276		A	CR on maintaining antenna connections for 4Rx capable UEs R17	17.10.0
2023-06	RAN#100	RP-231354	3279		A	CR on maintaining PL-RS switching delay requirements R17	17.10.0
2023-06	RAN#100	RP-231343	3284		F	CR on correction to interruption requirements for inter-band CA R17	17.10.0
2023-06	RAN#100	RP-231346	3286	1	F	CR on maintaining RRM requirements for NR FeMIMO R17	17.10.0
2023-06	RAN#100	RP-231344	3293		F	CR on R17 NTN	17.10.0
2023-06	RAN#100	RP-231355	3296		A	CR on R15 SCell activation requirements	17.10.0
2023-06	RAN#100	RP-231354	3299		A	CR for definition of PL-RS maintained in section 8.14	17.10.0
2023-06	RAN#100	RP-231342	3303		F	CR for Measurement period requirements	17.10.0
2023-06	RAN#100	RP-231340	3311		F	CR correcting RRM DCCA SCell activation and deactivation test case	17.10.0
2023-06	RAN#100	RP-231345	3313	1	F	CR to 38.133 Corrections to PRS-RSRPP measurement accuracy requirements	17.10.0
2023-06	RAN#100	RP-231345	3315	1	F	CR to 38.133 Corrections to positioning measurement core requirements	17.10.0
2023-06	RAN#100	RP-231340	3324		A	Update (Rel-17) of RRM DCCA SCell activation and deactivation test cases	17.10.0
2023-06	RAN#100	RP-231356	3330		A	38.133 R17 Cat.A CR on interruptions at SCell activation and deactivation	17.10.0

2023-06	RAN#100	RP-231345	3344	1	F	CR to TS 38.133: Supplement the impact of the measurement period(RSTD, PRS-RSRP, UE Rx-Tx) in general aspects of gapless measurement	17.10.0
2023-06	RAN#100	RP-231346	3350	1	F	CR for Unified TCI State switching requirements	17.10.0
2023-06	RAN#100	RP-231343	3353		F	Formal CR to Rel-17 TS 38.133 on SDT maintenance	17.10.0
2023-06	RAN#100	RP-231350	3355	1	F	Formal CR to Rel-17 TS 38.133: on RedCap maintenance in TS 38.133	17.10.0
2023-06	RAN#100	RP-231350	3357	1	F	Formal CR to Rel-17 TS 38.133: on RedCap Perf maintenance in TS 38.133	17.10.0
2023-06	RAN#100	RP-231346	3359	1	F	CR on maintenance of FeMIMO	17.10.0
2023-06	RAN#100	RP-231350	3363		F	Corrections to RedCap Measurement Requirements	17.10.0
2023-06	RAN#100	RP-231350	3365	1	F	Correction to offset for cell specific RSRP thresholds for 1Rx Redcap UE in 38.133	17.10.0
2023-06	RAN#100	RP-231350	3369	1	F	Corrections of SDT Test Case Parameters for RedCap	17.10.0
2023-09	RAN#101	RP-232493	3654	-	F	[NR_MG_enh2-Core] CR on R17 Concurrent MGs	17.11.0
2023-09	RAN#101	RP-232493	3652	-	F	[NR_MG_enh2-Core] CR on R17 NCSG	17.11.0
2023-09	RAN#101	RP-232494	3644	-	F	[NR_NTN_solutions-Perf] Editorial correction in NTN section of A.3.36.3 (Cat-F Rel-17)	17.11.0
2023-09	RAN#101	RP-232490	3642	1	F	[NR_ext_to_71GHz-Perf] Inter-frequency measurement for FR2-2 UE capable of independentGapConfig (Cat-F Rel-17)	17.11.0
2023-09	RAN#101	RP-232499	3637	-	A	[NR_unlic-Perf] CR to correct NR-U test cases R17	17.11.0
2023-09	RAN#101	RP-232497	3632	-	F	[NR_redcap-Core] CR on RedCap Test-cases	17.11.0
2023-09	RAN#101	RP-232503	3630	-	A	2AoA Relative angular offset between active probes for PC1 devices (Rel-17)	17.11.0
2023-09	RAN#101	RP-232503	3616	-	A	[NR_newRAT-Perf] Inter-frequency measurement for UE capable of independentGapConfig (Cat-A Rel-17)	17.11.0
2023-09	RAN#101	RP-232494	3605	-	D	CR for TS 38.133 - Correction of satellite access Clause for Timing Advance adjustment	17.11.0
2023-09	RAN#101	RP-232497	3603	-	F	[NR_redcap-Perf] Correction in Redcap Radio Link Monitoring In-sync Test in DRX mode for 2 Rx	17.11.0
2023-09	RAN#101	RP-232502	3601	-	F	[NR_newRAT-Perf] Correction in A.8.4.2.8 (Rel-17)	17.11.0
2023-09	RAN#101	RP-232494	3596	1	F	[NR_NTN_Solutions] CR 38.133 (Cat. F) on Time and Location Based Measurement Initiation	17.11.0
2023-09	RAN#101	RP-232494	3595	1	F	[NR_NTN_Solutions] CR 38.133 (Cat. F) on Transmit Timing Requirements	17.11.0
2023-09	RAN#101	RP-232499	3593	-	A	NR_unlic CR correcting NR-U RRC re-establishment RSRP test cases	17.11.0
2023-09	RAN#101	RP-232499	3590	-	A	NR_unlic CR correcting NR-U infra frequency RSRP test cases	17.11.0
2023-09	RAN#101	RP-232496	3587	1	F	NR_SmallData_INACTIVE CR 38.133 Test cases	17.11.0
2023-09	RAN#101	RP-232490	3585	-	F	NR_ext_71GHz CR 38.133 - RRM timing requirements	17.11.0
2023-09	RAN#101	RP-232495	3583	1	F	NR_pos_enh-Core: CR 38.133 Clean-up of NR positioning requirements in RRC_INACTIVE	17.11.0
2023-09	RAN#101	RP-232495	3581	1	F	NR_pos_enh-Core: CR 38.133 Correction to MG patterns for independent measurement gaps	17.11.0
2023-09	RAN#101	RP-232493	3579	-	F	NR_MG_enh-Core: Corrections to Inter frequency measurements for Rel-17 MG enhancements	17.11.0
2023-09	RAN#101	RP-232493	3577	1	F	NR_MG_enh-Core: Corrections to L1 measurement impact for Rel-17 MG enhancements	17.11.0
2023-09	RAN#101	RP-232500	3575	-	F	TEI17: CR 38.133 Correction to report mapping description for NR Timing Advance	17.11.0
2023-09	RAN#101	RP-232497	3573	-	F	NR_redcap-Perf: CR 38.133 Corrections to NR measurements with autonomous gaps for RedCap	17.11.0
2023-09	RAN#101	RP-232497	3571	1	F	NR_redcap-Perf: CR 38.133 Corrections of SDT test case ddescription for RedCap	17.11.0
2023-09	RAN#101	RP-232497	3569	1	F	NR_redcap-Core: CR 38.133 Corrections to Inter-RAT measurements for RedCap	17.11.0
2023-09	RAN#101	RP-232489	3559	1	F	[NR_feMIMO-Core]CR on maintenance of feMIMO RRM requirements in R17	17.11.0
2023-09	RAN#101	RP-232494	3552	-	F	[NR_NTN_solutions-Core] CR on R17 NTN	17.11.0
2023-09	RAN#101	RP-232500	3548	-	A	TEI16: CR on MRTD-MTTD and interruption requirements for non-collocated inter-band EN-DC R17	17.11.0
2023-09	RAN#101	RP-232497	3545	1	F	NR_redcap-Perf Formal CR to Rel-17 TS 38.133: on RedCap Perf maintenance in TS 38.133	17.11.0
2023-09	RAN#101	RP-232497	3543	1	F	NR_redcap-Core Formal CR to Rel-17 TS 38.133: on RedCap maintenance in TS 38.133	17.11.0
2023-09	RAN#101	RP-232494	3540	1	F	CR on maintaining UE transmit timing tests for NTN R17	17.11.0
2023-09	RAN#101	RP-232487	3536	-	A	CR on maintaining SS-RSRQ/SS-SINR measurement accuracy tests R17	17.11.0
2023-09	RAN#101	RP-232488	3532	-	F	[NR_CSIRS_L3meas-Core] Correction to requirements for CSI-RS measurement	17.11.0
2023-09	RAN#101	RP-232495	3530	-	F	[NR_pos_enh-Perf] CR on positioning measurement reporting	17.11.0
2023-09	RAN#101	RP-232495	3529	-	F	[NR_pos_enh-Core] CR on PRS measurement requirements for INACTIVE	17.11.0
2023-09	RAN#101	RP-232495	3527	1	F	[NR_pos_enh-Core] CR on requirements for PRS measurement outside MG	17.11.0

2023-09	RAN#101	RP-232494	3525	-	F	[NR NTN_solutions-Core] CR on NTN measurement requirements	17.11.0
2023-09	RAN#101	RP-232494	3523	-	F	[NR NTN_solutions-Core] CR on MG and scheduling restriction in NTN	17.11.0
2023-09	RAN#101	RP-232493	3521	-	F	[NR MG_enh-Core] CR on Rel-17 MGE requirements	17.11.0
2023-09	RAN#101	RP-232495	3519	-	A	[NR_pos-Perf] CR on Rx-Tx accuracy requirements R17	17.11.0
2023-09	RAN#101	RP-232499	3516	-	A	[NR_RRM_Enh-Perf] CR: Correction of SRS configuration for SRS carrier based switching tests	17.11.0
2023-09	RAN#101	RP-232500	3513	1	F	CR 38.133 Correction of normative text in requirements	17.11.0
2023-09	RAN#101	RP-232495	3509	2	F	[NR_pos_enh] CR on per FR PRS gap in case of concurrent gaps in Rel-17	17.11.0
2023-09	RAN#101	RP-232497	3506	1	F	Correction to performance part requirements for RedCap	17.11.0
2023-09	RAN#101	RP-232497	3504	1	F	Correction to RedCap requirements	17.11.0
2023-09	RAN#101	RP-232488	3498	1	F	Correction on PSCell activation and conditional PSCell addition tests	17.11.0
2023-09	RAN#101	RP-232491	3496	-	F	Correction on measurement period for R17 FR2 HST	17.11.0
2023-09	RAN#101	RP-232499	3487	-	A	[NR_unlic-Perf] CR on TC maintenance for NR-U R17	17.11.0
2023-09	RAN#101	RP-232497	3484	-	F	[NR_redcap-Perf] Cleaning up of RedCap measurement accuracy requirements R17	17.11.0
2023-09	RAN#101	RP-232497	3482	1	F	[NR_redcap-Core] Cleaning up of RedCap measurement reporting requirements R17	17.11.0
2023-09	RAN#101	RP-232499	3480	-	A	[NR_RRM_Enh-Perf] Correction to simultaneous BWP switching TCs R17	17.11.0
2023-09	RAN#101	RP-232496	3477	-	A	[NR_UE_pow_sav-Perf] Correction to relaxed idle measurement TCs R17	17.11.0
2023-09	RAN#101	RP-232501	3474	-	A	[NR_newRAT-Core] Correction to P factor for RLM BFD CBD and L1RSRP R17	17.11.0
2023-09	RAN#101	RP-232489	3471	1	F	[NR_feMIMO-Perf] CR of correction on parameter typos in TC4.5.5.7, TC5.5.5.8, TC6.5.5.7, TC7.5.5.9, TC7.5.5.10 for R17	17.11.0
2023-09	RAN#101	RP-232497	3467	1	F	[NR_redcap-Core] CR to Rel-17 TS 38.133: on NR RedCap Re-establishment	17.11.0
2023-09	RAN#101	RP-232494	3453	-	F	[NR NTN_solutions -Core] Modify the condition for collision between concurrent measurement gaps.	17.11.0
2023-09	RAN#101	RP-232495	3451	1	F	[NR_pos_enh-Core]: The correction of IE for positioning core requirements.	17.11.0
2023-09	RAN#101	RP-232495	3447	1	F	[NR_pos_enh-Core]: PRS-RSRPP shall be captured in measurement procedure.	17.11.0
2023-09	RAN#101	RP-232495	3436	1	F	CR on R17 positioning performance requirements	17.11.0
2023-09	RAN#101	RP-232491	3431	-	A	NR_HST-Perf Clarification to RRM HST A.6.1.1.7 (Rel-17)	17.11.0
2023-09	RAN#101	RP-232493	3425	-	F	CR on NCSG interruption requirement [NR MG_enh-Core] - R17	17.11.0
2023-09	RAN#101	RP-232500	3419	-	A	CR on additional UE gain - R17	17.11.0
2023-09	RAN#101	RP-232499	3414	-	A	[NR_RRM_enh-Perf] Editorial CR for Spatial relation info switch test requirements - Rel17	17.11.0
2023-09	RAN#101	RP-232502	3411	-	A	[NR_newRAT-Perf] CR for Active TCI State switch test requirements - Rel17	17.11.0
2023-09	RAN#101	RP-232500	3405	-	A	On NE-DC requirement	17.11.0
2023-09	RAN#101	RP-232497	3402	-	F	[NR_redcap-Perf] CR to event triggered reporting tests with per-UE gaps under DRX for RedCap	17.11.0
2023-09	RAN#101	RP-232503	3398	-	A	[NR_newRAT-Perf] CR to BWP Switch Delay TCs	17.11.0
2023-09	RAN#101	RP-232502	3394	-	F	[NR_newRAT-Perf, NR_feMIMO-Perf] CR to FR1 Beam failure detection requirement	17.11.0
2023-09	RAN#101	RP-232498	3392	-	F	NR_RF_FR1_enh-Perf Corrections in test parameters of DL interruptions at switching between UL carriers testcase	17.11.0
2023-09	RAN#101	RP-232488	3390	1	F	LTE_NR_DC_enh2-Perf Update of CPAC test cases	17.11.0
2023-09	RAN#101	RP-232488	3388	-	F	LTE_NR_DC_enh2-Perf Update of MR_DC test cases for fast SCell activation test cases	17.11.0
2023-09	RAN#101	RP-232492	3386	1	F	NR_IIoT_URLLC_enh-Perf Update (Rel-17) of RRM propagation delay compensation test cases	17.11.0
2023-09	RAN#101	RP-232488	3384	-	A	LTE_NR_DC_CA_enh-Perf Update of RRM DCCA SCell activation and deactivation test cases	17.11.0
2023-09	RAN#101	RP-232493	3381	1	F	NR MG_enh-Perf Maintenance perf part CR R17	17.11.0
2023-09	RAN#101	RP-232493	3379	1	F	NR MG_enh-Core Maintenance core part CR R17	17.11.0
2023-09	RAN#101	RP-232487	3377	-	A	CR (CAT-A) on FR2 Active TCI state switch delay testcase correction	17.11.0
2023-09	RAN#101	RP-232497	3373	1	F	[NR_redcap-Perf] CR on NR Inter-RAT measurements testcase correction for redcap UE	17.11.0
2023-12	RAN#102	RP-233342	3662	-	A	CR on R16 positioning test cases	17.12.0
2023-12	RAN#102	RP-233341	3670	-	A	[NR_RRM_Enh-Perf] Maintenance perf part CR on event triggered reporting tests with additional mandatory gap pattern R17	17.12.0
2023-12	RAN#102	RP-233347	3675	-	F	[NR MG_enh-Perf] Maintenance CR for MGE perf part R17	17.12.0
2023-12	RAN#102	RP-233341	3677	-	F	[NR_RRM_enh-Perf] CR for Spatial relation info switch test requirements - Rel17	17.12.0
2023-12	RAN#102	RP-233330	3685	-	F	CR on RRM test cases with testability issues - R17	17.12.0
2023-12	RAN#102	RP-233330	3688	-	A	On MRTD/MTTD requirement for inter-band non-collocated EN-DC/NE-DC (R17)	17.12.0

2023-12	RAN#102	RP-233330	3690		F	Missing requirement for inter-band synchronous EN-DC	17.12.0
2023-12	RAN#102	RP-233335	3706		F	[NR_newRAT-Perf, NR_feMIMO-Perf] CR to FR1 Beam failure detection requirement	17.12.0
2023-12	RAN#102	RP-233350	3714		F	[NR_redcap-Perf] CR to CSI-RS-based RLM for 2Rx RedCap	17.12.0
2023-12	RAN#102	RP-233342	3724		A	CR on CSSF in NR-U	17.12.0
2023-12	RAN#102	RP-233338	3727		A	CR on inter-frequency measurement without gap in CHO	17.12.0
2023-12	RAN#102	RP-233333	3731		A	[NR_newRAT-Perf] CR of correction in TC A.6.5.5.4	17.12.0
2023-12	RAN#102	RP-233346	3733		F	[NR_feMIMO-Perf] CR of correction in TC A.6.5.5.7	17.12.0
2023-12	RAN#102	RP-233333	3745		A	[NR_newRAT-Perf] Correction to CORESET RMC and SS-RSRQ accuracy test cases R17	17.12.0
2023-12	RAN#102	RP-233350	3750		F	[NR_redcap-Perf] Correction to FR1 RedCap test cases	17.12.0
2023-12	RAN#102	RP-233350	3760		F	Modification on interruption in paging reception for HD-FDD RedCap UEs	17.12.0
2023-12	RAN#102	RP-233351	3778		F	[NR_UE_pow_sav_enh-Perf] CR to TS 38.133: Corrections to Enhanced Power Saving test cases (Rel 17)	17.12.0
2023-12	RAN#102	RP-233350	3780		F	[NR_redcap-Perf] CR to TS 38.133: Corrections to RedCap test cases (Rel 17)	17.12.0
2023-12	RAN#102	RP-233347	3797		F	[NR_IOT_URLLC_enh-Perf] CR on performance requirements for PDC measurement	17.12.0
2023-12	RAN#102	RP-233341	3805		A	Correction of measurement gap parameters for additional rel-16 mandatory gap patterns test case	17.12.0
2023-12	RAN#102	RP-233341	3820		A	[NR_RRM_Enh-Perf] CR on TCs for UE specific CBW change R17	17.12.0
2023-12	RAN#102	RP-233334	3825		A	NR_newRAT-Perf CR clarification on MAC-CE based TCI state switch delay	17.12.0
2023-12	RAN#102	RP-233344	3831		F	LTE_NR_DC_enh2-Core CR for correcting removing Tidensity_inter_without_index	17.12.0
2023-12	RAN#102	RP-233341	3843		A	[NR_RRM_enh-Core] CR on the SCell activation	17.12.0
2023-12	RAN#102	RP-233342	3852		A	[NR_unlic-Perf] HO test cases under CCA update	17.12.0
2023-12	RAN#102	RP-233342	3869		A	[NR_unlic-Core]: Modify the condition for gradual timing adjustment.	17.12.0
2023-12	RAN#102	RP-233350	3894		F	Corrections to NR Measurements with Autonomous Gaps for RedCap	17.12.0
2023-12	RAN#102	RP-233341	3897		A	Corrections to NR Measurements with Autonomous Gaps	17.12.0
2023-12	RAN#102	RP-233350	3900		F	DraftCR: L1-RSRP measurement for beam reporting accuracy	17.12.0
2023-12	RAN#102	RP-233349	3904		F	[NR_NTN_solutions-Core] CR to 38.133 on Measurement Req. For NTN	17.12.0
2023-12	RAN#102	RP-233342	3931		A	[NR_unlic] EN-DC intra-frequency measurement test cases for NR-U – R17	17.12.0
2023-12	RAN#102	RP-233350	3933		F	[NR_redcap] RLM and BFD test cases in FR2 RedCap – R17	17.12.0
2023-12	RAN#102	RP-233350	3945		F	[NR_redcap-Perf] redCap HO test cases update	17.12.0
2023-12	RAN#102	RP-233349	3666	1	F	[NR_NTN_solutions-Perf] CR to TS 38.133 Annex for NTN test condition (CAT F, Rel-17)	17.12.0
2023-12	RAN#102	RP-233346	3766	1	F	CR on relative angular offsets between 2 active probes for FR2 HST PC6	17.12.0
2023-12	RAN#102	RP-233347	3673	1	F	[NR_MG_enh-Core] Update on scheduling availability requirements for NCSG R17	17.12.0
2023-12	RAN#102	RP-233344	3758	1	F	Correction to Fast SCell activation and PSCell activation tests	17.12.0
2023-12	RAN#102	RP-233351	3946	1	F	[NR_SmallData_INACTIVE-Perf] Formal CR to Rel-17 TS 38.133 on SDT test cases	17.12.0
2023-12	RAN#102	RP-233336	3875	1	F	[5G_V2X_NRSL] Draft CR on correction to interruption requirements in U2N relay operation under SL-DRX	17.12.0
2023-12	RAN#102	RP-233350	3739	1	F	[NR_redcap-Core] CR to Rel-17 TS 38.133: on NR RedCap HO	17.12.0
2023-12	RAN#102	RP-233350	3935	1	F	[NR_redcap] High priority search with eDRX in IDLE mode – R17	17.12.0
2023-12	RAN#102	RP-233350	3937	1	F	[NR_redcap] Correction CR for eDRX operation in IDLE mode – RedCap clauses (R17)	17.12.0
2023-12	RAN#102	RP-233350	3939	1	F	[NR_redcap] Correction CR for eDRX operation in IDLE mode – Non-RedCap clauses (R17)	17.12.0
2023-12	RAN#102	RP-233350	3902	1	F	Correction of requirements and parameters for RedCap testing	17.12.0
2023-12	RAN#102	RP-233350	3908	1	F	NR_redcap-Perf Formal CR to Rel-17 TS 38.133: on RedCap Perf maintenance in TS 38.133	17.12.0
2023-12	RAN#102	RP-233346	3790	1	F	[NR_FeMIMO-Core]CR on maintaining L1-RSRP requirements for inter-cell BM R17	17.12.0
2023-12	RAN#102	RP-233347	3795	1	F	[NR_MG_enh-Core] CR on Rel-17 MGE requirements	17.12.0
2023-12	RAN#102	RP-233349	3664	1	F	CR on R17 positioning test cases	17.12.0
2023-12	RAN#102	RP-233340	3736	1	F	Correction on measurements for UE configured with relaxed measurement criterion	17.12.0
2023-12	RAN#102	RP-233349	3834	1	F	CR to 38.133 on PRS-RSRPP accuracy requirement	17.12.0
2023-12	RAN#102	RP-233351	3865	1	F	[NR_UE_pow_sav_enh-Core]: Modify the IE for RLM.	17.12.0
2023-12	RAN#102	RP-233349	3860	1	F	[NR_NTN_solutions -Core]: Modify the condition for NTN gradual timing adjustment.	17.12.0
2023-12	RAN#102	RP-233349	3862	1	F	[NR_pos_enh-Core]:Modify positioning measurements related in RRC_INACTIVE and RRC_CONNECTED state.	17.12.0
2023-12	RAN#102	RP-233349	3864	1	F	[NR_pos_enh-Core]: Modify positioning measurements related in RRC_INACTIVE state.	17.12.0

2023-12	RAN#102	RP-233334	3774	1	F	Draft CR on Handover with PSCell from SA to EN-DC with target FR2 PSCell in A.7.3.1.6 and A.7.3.1.7	17.12.0
2023-12	RAN#102	RP-233349	3782	2	F	[NR NTN_solutions-Perf] CR to TS 38.133: Corrections to NR NTN test cases (Rel 17)	17.12.0
2023-12	RAN#102	RP-233346	3775	1	F	[NR_HST_FR2] CR for 38.133: Corrections in HST FR2 RRM requirements and test (Rel-17, Cat F)	17.12.0
2023-12	RAN#102	RP-233350	3892	2	F	Corrections of SDT Test Case Parameters for RedCap	17.12.0
2023-12	RAN#102	RP-233349	3877	1	F	[NR_pos_enh] TA validation requirements for positioning in RRC inactive state in Rel-17	17.12.0
2023-12	RAN#102	RP-233346	3792	1	F	[NR_FeMIMO-Perf] Corrections to unified TCI states switching test cases R17	17.12.0
2023-12	RAN#102	RP-233351	3788	1	F	[NR_UE_pow_sav_enh-Core]CR on maintaining RLM/BFD relaxation requirements R17	17.12.0
2023-12	RAN#102	RP-233347	3719	4	F	CR on ConMGs	17.12.0
2023-12	RAN#102	RP-233346	3703	1	F	[NR_HST_FR1_enh] Inter-frequency measurement for NR FR1 HST	17.12.0
2023-12	RAN#102	RP-233350	3799	2	F	[NR_redcap-Core] CR on INACTIVE requirements	17.12.0
2023-12	RAN#102	RP-233347	3721	2	F	Draft CR on ConMGs capability- <i>MCC comment: CR Partially Implemented in R4-2321634 because of a misalignment between CR and spec (section 9.2D.6.2 not implemented in CR)</i>	17.12.0
2024-03	RAN#103	RP-240552	3973		F	[TEI17] CR 38.133 Correction of CR implementation on normative text	17.13.0
2024-03	RAN#103	RP-240552	3974		F	[TEI17] CR 38.133 Correction of normative text in requirements	17.13.0
2024-03	RAN#103	RP-240552	4241	2	F	CR to 38.133 CatF R17 on PC1,5,6 RRM Parameters for RAN5	17.13.0
2024-03	RAN#103	RP-240555	4134		A	(LTE_NR_DC_CA_enh-Core) CR to correct Inactive mode CA/DC measurement requirements	17.13.0
2024-03	RAN#103	RP-240555	4002	1	F	(LTE_NR_DC_enh2) CR for missing test case of E-UTRAN – NR FR2 interruptions during measurements on deactivated NR PSCell - R17	17.13.0
2024-03	RAN#103	RP-240555	4004	1	F	(LTE_NR_DC_enh2) Maintenance CR for test caes - A.4.5.2.10 - R17	17.13.0
2024-03	RAN#103	RP-240555	4174	2	F	(LTE_NR_DC_enh2-Core) CR corrections for SCG Activation and Deactivation Delay	17.13.0
2024-03	RAN#103	RP-240559	4014		F	(NR_feMIMO-Core) CR for active state list switching delay requirements for UTCI state -R17	17.13.0
2024-03	RAN#103	RP-240559	4126		F	(NR_HST_FR1_enh-Core) Maintenance CR on IDLE mode HST UE mobility R17	17.13.0
2024-03	RAN#103	RP-240559	4209		F	(NR_FeMIMO) CR correcting unified TCI state switching requirements	17.13.0
2024-03	RAN#103	RP-240559	4211		F	(NR_ext_to_71GHz) CR corrections RRM core requirements	17.13.0
2024-03	RAN#103	RP-240559	4226	1	F	[NR_HST_FR2_enh-Core] CR on the scheduling restriction of R17 FR2 HST	17.13.0
2024-03	RAN#103	RP-240559	4007	1	F	CR on combination of HST and RRM relaxation - R17	17.13.0
2024-03	RAN#103	RP-240561	4147	1	F	[NR_MG_enh-Perf] Maintenance CR for MGE perf part R17	17.13.0
2024-03	RAN#103	RP-240561	4227	1	F	[NR_MG_enh-Core] CR on the scheduling restriction of R17 NCSG	17.13.0
2024-03	RAN#103	RP-240562	4020		A	(NR_newRAT) CR on NR-E-UTRAN HO requirement maintenance R17	17.13.0
2024-03	RAN#103	RP-240563	4131		F	(NR_newRAT-Core) CR to correct PSCell addition delay requirements	17.13.0
2024-03	RAN#103	RP-240563	4140		A	(NR_newRAT-Core) CR to correct and clarify Rel-15 TCI state switching delay requirements	17.13.0
2024-03	RAN#103	RP-240564	4219		A	(NR_newRAT-Core) CR on MG related requirements R17	17.13.0
2024-03	RAN#103	RP-240566	3982		A	(NR_newRAT-Perf) CR to A.6.3.2.1.3 Intra-freq RRC re-establishment	17.13.0
2024-03	RAN#103	RP-240566	3992		A	(NR_newRAT-Perf) CR to CORESET and PDSCH RMCs of A.5.6.1.3, A.5.3.1.4 SSB SCS 240kHz config	17.13.0
2024-03	RAN#103	RP-240567	4051		A	(NR_newRAT-Perf) 38.133 CR on corrections for SMTC configuration – R17	17.13.0
2024-03	RAN#103	RP-240567	4116		A	(NR_newRAT-Perf) Corrections to TCI states switching test cases R17	17.13.0
2024-03	RAN#103	RP-240568	4120		A	(NR_newRAT-Perf) Correcting propagation condition of test cases not configuring Noc Rel-17	17.13.0
2024-03	RAN#103	RP-240568	4192		A	(NR_newRAT-Perf)CR on test cases for SCell activation delay reduction in R17	17.13.0
2024-03	RAN#103	RP-240568	4260		A	(NR_newRAT-Perf) Inter-frequency measurement for UE capable of independentGapConfig (Cat-A Rel-17)	17.13.0
2024-03	RAN#103	RP-240569	4058		F	(NR_newRAT-Perf, NR_UE_pow_sav_enh-Perf, NR_redcap-Perf) CR to EPRE ratio of PDCCH and PDCCH DMRS for RLM tests	17.13.0
2024-03	RAN#103	RP-240569	4060		F	(NR_newRAT-Perf,NR_redcap-Perf) CR to FR1 SA intra-frequency SS-RSRQ measurement accuracy	17.13.0
2024-03	RAN#103	RP-240570	4042		F	(NR NTN_solutions-Perf) CR to TS 38.133: Corrections to NR NTN test cases (Rel 17)	17.13.0
2024-03	RAN#103	RP-240570	4224		F	(NR NTN_solutions-Core) CR on Rel-17 NTN RRM requirements	17.13.0

2024-03	RAN#103	RP-240570	4027	1	F	(NR_NTN_solutions-Core) CR on RSRP/RSRQ/SINR Requirements for NR-NTN- Rel17	17.13.0
2024-03	RAN#103	RP-240570	4234	1	F	(NR_NTN_solutions-Core) CR on conditional handover delay for NTN	17.13.0
2024-03	RAN#103	RP-240570	4247	1	F	(NTN_Solutions) CR on 38.133 for applicability of time-based measurement initiation in Idle Mode (Rel. 17)	17.13.0
2024-03	RAN#103	RP-240571	4256		F	(NR_pos_enh-Core) CR on positioning core requirements in RRC_INACTIVE state in R17	17.13.0
2024-03	RAN#103	RP-240571	3966		A	(NR_pos-Perf) CR on positioning test cases in R17 - Cat A	17.13.0
2024-03	RAN#103	RP-240571	3968		F	(NR_pos_enh-Perf) CR on R17 positioning test cases in connected mode	17.13.0
2024-03	RAN#103	RP-240571	4245		F	(NR_pos_enh-Perf) CR to 38.133 Corrections to PRS-RSRPP accuracy requirement	17.13.0
2024-03	RAN#103	RP-240571	4254	1	F	(NR_pos_enh-Perf) CR on R17 positioning test cases in inactive mode	17.13.0
2024-03	RAN#103	RP-240572	4101	1	F	(NR_redcap-Core) Correction to RedCap core requirements_R17	17.13.0
2024-03	RAN#103	RP-240573	4040		F	(NR_redcap-Perf) CR to TS 38.133: Corrections to RedCap test cases (Rel 17)	17.13.0
2024-03	RAN#103	RP-240573	4047		F	(NR_redcap-Perf) Correction CR for RRC re-establishment TCs for RedCap (R17)	17.13.0
2024-03	RAN#103	RP-240573	4062		F	(NR_redcap-Perf) CR to A.16.4.1.2 UE transmit timing test and A.16.5.2.2 BFD and LR for RedCap	17.13.0
2024-03	RAN#103	RP-240573	4196	1	F	(NR_redcap-Perf) Correction of requirements and parameters for RedCap testing	17.13.0
2024-03	RAN#103	RP-240573	4264	1	F	(NR_redcap-Perf) Formal CR to Rel-17 TS 38.133: on RedCap Perf maintenance in TS 38.133	17.13.0
2024-03	RAN#103	RP-240573	4112	1	F	(NR_redcap-Core) Correction on relaxation measurement requirements for RedCap inactive UE with idle eDRX>10.24s	17.13.0
2024-03	RAN#103	RP-240573	4155	2	F	(NR_redcap-Core) CR on handover requirements for RedCap	17.13.0
2024-03	RAN#103	RP-240573	4181	1	F	Corrections in RRC_INACTIVE for RedCap	17.13.0
2024-03	RAN#103	RP-240574	4103	1	F	(NR_redcap-Perf) Correction to RedCap measurement test cases_R17	17.13.0
2024-03	RAN#103	RP-240574	4105	1	F	(NR_redcap-Perf) Correction to RedCap inactive and connected state test cases_R17	17.13.0
2024-03	RAN#103	RP-240575	4023		A	(NR_unlic-Core)CR on max function for cell detection in NR-U R17	17.13.0
2024-03	RAN#103	RP-240575	4088		A	(NR_RRM_Enh-Perf) Maintenance perf part CR on event triggered reporting tests with additional mandatory gap pattern (Rel-17)	17.13.0
2024-03	RAN#103	RP-240575	4097		A	(NR_RRM_Enh-Perf) Correction to CGI measurement test cases_R17	17.13.0
2024-03	RAN#103	RP-240575	4136		F	(NR_RRM_enh2-Core) CR to correct HO with PSCell delay requirements	17.13.0
2024-03	RAN#103	RP-240575	4145		A	(NR_RRM_enh-Perf) corrections for FR2 inter-band SCell activation TC – R17	17.13.0
2024-03	RAN#103	RP-240575	4222		A	(NR_RRM_enh-Core) CR on multiple SCell activation requirements_R17	17.13.0
2024-03	RAN#103	RP-240575	4229	1	F	[NR_RRM_enh2-Perf] CR on Test case of PUCCH SCell and fast SCell activation of R17 enhancement	17.13.0
2024-03	RAN#103	RP-240575	4266	1	F	(NR_SmallData_INACTIVE-Perf) Formal CR to Rel-17 TS 38.133 on SDT test cases	17.13.0
2024-03	RAN#103	RP-240576	4268		A	(NR_unlic-Perf) Correction CR on UL CCA model (R17)	17.13.0
2024-03	RAN#103	RP-240576	4271		A	(NR_unlic-Perf) CR for NR-U TC correction (R17)	17.13.0
2024-06	RAN#104	RP-241401	4317		F	(NR_redcap-Perf) CR to A.16.6.2.9 and A.16.6.2.10 SMTTC settings	17.14.0
2024-06	RAN#104	RP-241399	4319	1	F	(NR_MG_enh-Perf) Correction to A.7.6.15.3 Event triggered reporting test for FR2 concurrent gap	17.14.0
2024-06	RAN#104	RP-241399	4321		F	(NR_MG_enh-Perf) Correction to A.7.6.16.2 Event triggered reporting test with NCSG for FR2	17.14.0
2024-06	RAN#104	RP-241384	4325		A	CR on test for scheduling availability during BFD/CBD in FR2	17.14.0
2024-06	RAN#104	RP-241384	4329		A	(NR_newRAT-Perf) CR on test for SCell activation	17.14.0
2024-06	RAN#104	RP-241403	4331		A	(NR_RRM_Enh-Perf) Maintenance perf part CR on event triggered reporting tests with additional mandatory gap pattern (Rel-17)	17.14.0
2024-06	RAN#104	RP-241397	4347	1	F	(NR_HST_FR1_enh) Deactivated Scell measurement for NR FR1 HST	17.14.0
2024-06	RAN#104	RP-241385	4351	1	A	(NR_newRAT-Perf) R15 SUL test setup correction R18 mirror	17.14.0
2024-06	RAN#104	RP-241384	4358		A	(NR_newRAT_Perf) CR for test case of intra-frequency handover from FR2 to FR2 R17	17.14.0
2024-06	RAN#104	RP-241404	4361		A	(NR_unlic-Perf) CR to TS 38.133: Corrections to NR-U test cases (Rel 17)	17.14.0
2024-06	RAN#104	RP-241401	4367		F	[NR_redcap-Perf] Correction to Cell specific test parameters for E-UTRAN inter-RAT NR handover affecting to A.18.2.1.1	17.14.0
2024-06	RAN#104	RP-241384	4371		A	(NR_newRAT-Perf) Inter-RAT measurement for UE capable of independentGapConfig (Cat-A Rel-17)	17.14.0
2024-06	RAN#104	RP-241387	4373	1	F	CR on 14.2.1.6 (Cat-F Rel-17)	17.14.0
2024-06	RAN#104	RP-241404	4378		A	(NR_unlic-Perf) CR for NR-U TC correction (R17)	17.14.0

2024-06	RAN#104	RP-241404	4381		A	(NR_unlic-Perf) Removal of Interruption during SCell operations and RSSI and CO Measurement reporting TCs for NR-U (R17)	17.14.0
2024-06	RAN#104	RP-241404	4384		A	(NR_unlic-Perf) OCNG modeling for NR-U (R17)	17.14.0
2024-06	RAN#104	RP-241401	4386		F	(NR_redcap-Perf) Correction CR for RRC re-establishment TCs for RedCap (R17)	17.14.0
2024-06	RAN#104	RP-241401	4388		F	(NR_redcap-Perf) Correction CR for inter-RAT measurement TCs for RedCap Clause A.18.3.1(R17)	17.14.0
2024-06	RAN#104	RP-241399	4394	1	F	(NR_MG_enh-Perf) Maintenance CR for MGE perf part R17	17.14.0
2024-06	RAN#104	RP-241388	4403		F	(TEI17) 38.133 CR addressing pervious conditions	17.14.0
2024-06	RAN#104	RP-241388	4407	1	F	(TEI17) 38.133 CR addressing the use of expected to in normative text	17.14.0
2024-06	RAN#104	RP-241396	4414		F	(NR_ext_to_71GHz-Core) 38.133 CR addressing duplication of clause number	17.14.0
2024-06	RAN#104	RP-241399	4419	1	F	CR on Rel-17 NCSG requirements (Rel-17 spec)	17.14.0
2024-06	RAN#104	RP-241400	4425	1	F	(NR_redcap-Core) CR on high priority search with eDRX (R17)	17.14.0
2024-06	RAN#104	RP-241403	4432		A	[NR_UE_pow_sav-Core] Corrections and clarifications	17.14.0
2024-06	RAN#104	RP-241404	4435		A	[NR_unlic-Perf] Correction for NR-U test case	17.14.0
2024-06	RAN#104	RP-241400	4437		F	[NR_Redcap-Core] Corrections and clarifications	17.14.0
2024-06	RAN#104	RP-241397	4448		F	CR on combination of HST and RRM relaxation	17.14.0
2024-06	RAN#104	RP-241403	4451	1	F	CR on applicability conditions for SDT	17.14.0
2024-06	RAN#104	RP-241392	4457	1	F	[NR_RRM_enh2-Perf] CR on R17 test cases of unknown PUCCH SCell and fast SCell activation in FR1	17.14.0
2024-06	RAN#104	RP-241385	4463		A	[NR_newRAT-Perf] CR for R15 test case of L1-RSRP measurement	17.14.0
2024-06	RAN#104	RP-241400	4467	1	F	(NR_redcap-Core) CR on handover requirements for RedCap	17.14.0
2024-06	RAN#104	RP-241402	4484		A	(NR_RF_FR1-Perf) Correction to Rel-16 Tx switching RRM test cases_R17	17.14.0
2024-06	RAN#104	RP-241402	4486		F	(NR_RF_FR1_enh-Perf) Correction to Rel-17 Tx switching RRM test cases_R17	17.14.0
2024-06	RAN#104	RP-241401	4490	1	F	(NR_redcap-Perf) Correction to RedCap RRM test cases_R17	17.14.0
2024-06	RAN#104	RP-241392	4499	1	F	CR Correcting propagation condition Rel-17 (Cat F)	17.14.0
2024-06	RAN#104	RP-241385	4501		F	CR resubmission Correcting propagation condition Rel-17 (Cat F)	17.14.0
2024-06	RAN#104	RP-241400	4516	1	F	(NR_redcap-Core) Correction to RedCap relaxed measurement requirements_R17	17.14.0
2024-06	RAN#104	RP-241397	4520	1	F	[NR_HST_FR2] CR to 38.133, Cat F on HST FR2 RRM Performance Corrections	17.14.0
2024-06	RAN#104	RP-241388	4525		A	CR to 38.133 Rel-17 CatA on Missing PC1 Test Parameters for RAN5	17.14.0
2024-06	RAN#104	RP-241388	4527	1	F	CR to 38.133 Rel-17 CatF on PC5,6 RRM Test Configuration Parameters for RAN5	17.14.0
2024-06	RAN#104	RP-241383	4531	1	F	(NR_newRAT-Core) CR for Rel-15 TCI state switching requirements - Rel-17	17.14.0
2024-06	RAN#104	RP-241387	4539		F	(NR_NTN_solutions-Perf) CR on modification on the filed name with LEO in NTN related features in Rel-17 perf requirements	17.14.0
2024-06	RAN#104	RP-241400	4543		F	Correction on measurement requirements for RedCap UE	17.14.0
2024-06	RAN#104	RP-241403	4549	1	F	(NR_SmallData_INACTIVE) CR correcting SDT test cases	17.14.0
2024-06	RAN#104	RP-241401	4551	2	F	(NR_redcap-Perf) CR correcting SDT test cases for RedCap	17.14.0
2024-06	RAN#104	RP-241403	4557		A	Correction of parameters for FR2 SA event triggered without gap tests	17.14.0
2024-06	RAN#104	RP-241399	4560		A	(NR_pos-Core) CR on measurement requirements for R16 positioning R17	17.14.0
2024-06	RAN#104	RP-241399	4562	1	F	(NR_MG_enh-Core) CR on Rel-17 MGE core requirements	17.14.0
2024-06	RAN#104	RP-241386	4564	1	F	(NR_NTN_solutions-Core) CR on Rel-17 NTN RRM requirements	17.14.0
2024-06	RAN#104	RP-241397	4568	3	F	(NR_HST_FR1_enh-Perf) CR on Test cases for NR FR1 HST R17	17.14.0
2024-06	RAN#104	RP-241386	4581	1	F	[NR_NTN_solutions-Core] CR for the TCI state indication of R17 NTN	17.14.0
2024-06	RAN#104	RP-241400	4582	1	F	[NR_redcap-Core] CR for the TCI state indication of R17 RedCap	17.14.0
2024-06	RAN#104	RP-241400	4587		F	(NR_redcap-Core) eDRX requirements for CG-SDT for non-RedCap UE	17.14.0
2024-06	RAN#104	RP-241386	4588		F	(NR_NTN_solutions-Core) Modify the S criteria for NTN measurements of intra-frequency NR cell in RRC IDLEINACTIVE state	17.14.0
2024-06	RAN#104	RP-241401	4594		F	(NR_redcap-Perf) Formal CR to Rel-17 TS 38.133 on RedCap SDT test cases	17.14.0
2024-06	RAN#104	RP-241400	4600		F	(NR_redcap-Core) Formal CR to Rel-17 TS 38.133: on eDRX non-RedCap for INACTIVE mode	17.14.0
2024-06	RAN#104	RP-241400	4609	1	F	(NR_redcap-Core) Formal CR to Rel-17 TS 38.133: on RedCap Handover	17.14.0
2024-06	RAN#104	RP-241401	4610	1	F	(NR_redcap-Perf) Formal CR to Rel-17 TS 38.133: on RedCap Perf maintenance	17.14.0
2024-06	RAN#104	RP-241385	4622		A	(NR_newRAT-Perf) Correction to intra-frequency re-establishment test case_R17	17.14.0
2024-09	RAN#105	RP-242175	4627		A	(NR_newRAT-Perf) CR to A.6.7.1.2.2 config 3 duplex mode	17.15.0

2024-09	RAN#105	RP-242185	4629	1	F	(NR_redcap-Perf) CR to A.16.7.1.3 and A.16.7.1.4 for typo correction	17.15.0
2024-09	RAN#105	RP-242185	4631		F	(NR_redcap-Perf) CR to 1x1 antenna configuration in FR1	17.15.0
2024-09	RAN#105	RP-242184	4634	1	F	(NR_redcap-Core) CR to 38.133 on eDRX requirements in IDLE mode for RedCap UE	17.15.0
2024-09	RAN#105	RP-242152	4641	1	F	(LTE_NR_DC_CA_enh-Core) CR on IDLE mode CA/DC measurements	17.15.0
2024-09	RAN#105	RP-242170	4644		A	(NR_Mob_enh-Core) CR on abbreviation of DAPS	17.15.0
2024-09	RAN#105	RP-242168	4646	1	F	(NR_MG_enh-Core) CR on Rel-17 gap enhancements	17.15.0
2024-09	RAN#105	RP-242182	4648	1	F	(NR_NTN_solutions-Perf) CR on Rel-17 NTN core and accuracy requirements	17.15.0
2024-09	RAN#105	RP-242183	4650	1	F	(NR_pos_enh-Perf) CR on R17 positioning test cases in RRC_INACTIVE state	17.15.0
2024-09	RAN#105	RP-242160	4665		A	CR on RSRP Measurement Report Mapping - R17	17.15.0
2024-09	RAN#105	RP-242168	4667		F	CR for minimum requirement at transitions - R17	17.15.0
2024-09	RAN#105	RP-242181	4675		F	(NR_NTN_solutions-Core) CR on update field name of NTN features for NGSO	17.15.0
2024-09	RAN#105	RP-242162	4683	1	F	CR 38.133 Addressing incomplete Rel-17 requirements in section 8	17.15.0
2024-09	RAN#105	RP-242168	4685	1	F	(NR_MG_enh-Core) CR on Rel-17 NCSG pattern (Rel-17 spec)	17.15.0
2024-09	RAN#105	RP-242189	4687	1	F	(NR_UE_pow_sav_enh-Core) Clarification to RLM/BFD relaxation with short DRX	17.15.0
2024-09	RAN#105	RP-242175	4695		A	(NR_newRAT-Perf) CR to TS 38.133: Corrections to RRM FR2 test cases (Rel 17)	17.15.0
2024-09	RAN#105	RP-242175	4699		A	(NR_newRAT-Perf) CR to TS 38.133: Corrections to RRM FR2 conditions for PC1 (Rel 17)	17.15.0
2024-09	RAN#105	RP-242182	4701	1	F	CR on maintenance of RRM performance requirements in NR_NTN_solutions WI_R17	17.15.0
2024-09	RAN#105	RP-242181	4707	1	F	(NR_NTN_solutions-Core) CR to TS 38.133 specification corrections for NR NTN	17.15.0
2024-09	RAN#105	RP-242181	4709	1	F	(NR_NTN_solutions-Core) CR to TS 38.133 measurement procedure related corrections for NR NTN	17.15.0
2024-09	RAN#105	RP-242182	4711	1	F	(NR_NTN_solutions-Perf) CR to TS 38.133 measurement accuracy related corrections for NR NTN	17.15.0
2024-09	RAN#105	RP-242184	4713		F	(NR_redcap-Core) CR to TS 38.133 specification corrections for NR Redcap	17.15.0
2024-09	RAN#105	RP-242168	4717	1	F	(NR_MG_enh-Perf) Maintenance CR for MGE perf part	17.15.0
2024-09	RAN#105	RP-242173	4723	1	F	(NR_newRAT) CR on NR-E-UTRAN HO requirement	17.15.0
2024-09	RAN#105	RP-242184	4725	1	F	(NR_Redcap-Core) CR correcting and clarifying the handover interruption time requirements	17.15.0
2024-09	RAN#105	RP-242163	4738		F	(NR_feMIMO-Perf) Correction of test configurations for Rel-17 FeMIMO	17.15.0
2024-09	RAN#105	RP-242167	4741	1	F	(NR_HST_FR2) CR to 38.133 with corrections and missing RRM parameters	17.15.0
2024-09	RAN#105	RP-242186	4749	1	F	(NR_RRM_enh2-Core) Correction CR to multiple SCell activation with PUCCH SCell	17.15.0
2024-09	RAN#105	RP-242175	4754		A	(NR_newRAT-Perf) Correction to FR1 BFR test cases_R17	17.15.0
2024-09	RAN#105	RP-242175	4758		A	(NR_newRAT-Perf) Correction to PRACH RMCs_R17	17.15.0
2024-09	RAN#105	RP-242186	4761		A	(NR_RF_FR1-Perf) Correction to Rel-16 UL Tx switching test cases_R17	17.15.0
2024-09	RAN#105	RP-242160	4764		A	(NR_CSIRS_L3meas-Perf) Correction to CSI-RS L3 measurement test cases_R17	17.15.0
2024-09	RAN#105	RP-242186	4766		F	(NR_RF_FR1_enh-Perf) Correction to Rel-17 UL Tx switching test cases_R17	17.15.0
2024-09	RAN#105	RP-242185	4768		F	(NR_redcap-Perf) Correction to FR1 RedCap BFR test cases_R17	17.15.0
2024-09	RAN#105	RP-242185	4770		F	(NR_redcap-Perf) Correction to FR2 RedCap RLM test cases_R17	17.15.0
2024-09	RAN#105	RP-242186	4773	1	F	(NR_RRM_enh2-Core) CR on PUCCH SCell activation with multiple SCeLLs R17 (Cat F)	17.15.0
2024-09	RAN#105	RP-242187	4775	1	F	(NR_RRM_enh2-Perf) CR on TC maintenance for PUCCH Scell activation R17 (Cat F)	17.15.0
2024-09	RAN#105	RP-242176	4780		A	(NR_newRAT-Perf) CR on TC for BWP switching R17 (Cat A)	17.15.0
2024-09	RAN#105	RP-242174	4800	1	F	(NR_newRAT-Core) Corrections on measurement restriction for RLM, BFD and CBD R17	17.15.0
2024-09	RAN#105	RP-242168	4835	1	F	(NR_MG_enh-Core) CR on 38.133 MG enh on NCSG	17.15.0
2024-09	RAN#105	RP-242186	4836	2	F	(NR_RRM_enh2-Core) CR on SRS antenna switching interruption requirements in R17	17.15.0
2024-09	RAN#105	RP-242181	4848		F	(NR_NTN_solutions-Core) CR on Rel-17 NTN measurement requirements	17.15.0
2024-09	RAN#105	RP-242152	4850	1	F	(LTE_NR_MUSIM-Core) CR on Rel-17 MUSIM core requirements	17.15.0
2024-09	RAN#105	RP-242162	4863	1	F	CR to 38.133 on Gradual timing adjustment	17.15.0
2024-09	RAN#105	RP-242184	4875		F	(NR_redcap-Core) Correction on higher priority search with eDRX	17.15.0
2024-09	RAN#105	RP-242181	4891		F	Modify the NR NTN RRC Re-establishment requirements_R17	17.15.0
2024-09	RAN#105	RP-242163	4901	1	F	(NR_FeMIMO-Core) CR on TRP specific candidate beam detection_R17	17.15.0
2024-09	RAN#105	RP-242152	4902	3	F	(LTE_NR_DC_enh2-Core) CR on fast SCell activation in FR2_R17	17.15.0

2024-09	RAN#105	RP-242174	4904		A	(NR_newRAT-Core) CR on SCell activation in FR2 R17	17.15.0
2024-09	RAN#105	RP-242162	4906		A	(NR_eMIMO-Core) CR on candidate beam detection R17	17.15.0
2024-09	RAN#105	RP-242187	4908		A	(NR_RRM_enh-Core) CR on multiple SCell activation in FR2 R17	17.15.0
2024-09	RAN#105	RP-242184	4921		F	CR to 38.133: Correction to priority level of relaxed inter-RAT measurements	17.15.0
2024-09	RAN#105	RP-242188	4923		A	(NR_RRM_enh-Perf) CR to 38.133: Correction to NR SRS carrier based switching test cases	17.15.0
2024-09	RAN#105	RP-242168	4926		F	(NR_MG_enh-Core) CR 38.133 Corrections to Pre-MG activation/deactivation R17	17.15.0
2024-09	RAN#105	RP-242190	4931		A	(NR_unlic-Perf) CR for NR-U TC correction – Clause A.10 (R17)	17.15.0
2024-09	RAN#105	RP-242190	4934		A	(NR_unlic-Perf) CR for NR-U TC correction – Clause A.11 (R17)	17.15.0
2024-09	RAN#105	RP-242190	4937		A	(NR_unlic-Perf) CR for NR-U TC correction – Clause A.12 (R17)	17.15.0
2024-09	RAN#105	RP-242190	4940		A	(NR_unlic-Perf) CR for NR-U TC correction – Clause A.13 (R17)	17.15.0
2024-09	RAN#105	RP-242185	4942		F	(NR_redcap-Perf) Correction CR for RedCap TCs (R17)	17.15.0
2024-09	RAN#105	RP-242185	4952		F	(NR_redcap-Perf) Formal CR to Rel-17 TS 38.133: on RedCap Perf maintenance	17.15.0
2024-12	RAN#106	RP-243045	4748	2	F	Corrections of the propagation conditions for cell reselection with highSpeedMeasInterFreq-r17	17.16.0
2024-12	RAN#106	RP-243055	4964		A	(NR_newRAT-Perf) CR to A.6.6.3.1 to A.6.6.3.3 on duplex mode and LTE RF channel number	17.16.0
2024-12	RAN#106	RP-243062	4966		F	(NR_redcap-Perf) CR to A.16.5.3 on PDCCH and PDSCH max HARQ transmission	17.16.0
2024-12	RAN#106	RP-243062	4968	1	F	(NR_redcap-Perf) CR to CORESET RMC for RLM 1Rx RedCap	17.16.0
2024-12	RAN#106	RP-243062	4970		F	(NR_redcap-Perf) CR to A.16.6.1.7 Dedicated CORESET RMC	17.16.0
2024-12	RAN#106	RP-243062	4972		F	(NR_redcap-Perf) CR to A.16.6.2.9 redundant T2 parameter value	17.16.0
2024-12	RAN#106	RP-243062	4974		F	(NR_redcap-Perf) CR to A.16.3.2.3.1 Redirection on CORESET reference channel	17.16.0
2024-12	RAN#106	RP-243062	4975		F	(NR_redcap-Perf) CR to A.16.3.1.7 to A.16.3.1.10 for Handover	17.16.0
2024-12	RAN#106	RP-243062	4977		F	(NR_redcap-Perf) CR to A.16.1.2.4 on missing configuration number	17.16.0
2024-12	RAN#106	RP-243062	4979		F	(NR_redcap-Perf) CR to A.16.6.1.10 SMTC configuration for CD-SSB	17.16.0
2024-12	RAN#106	RP-243062	4981		F	(NR_redcap-Perf) CR to A.18.1.1.1 E-UTRA cell re-selection to NR cell	17.16.0
2024-12	RAN#106	RP-243051	4984		A	(NR_Mob_enh-Core) Correction CR for Rel-16 CHO delay requirements	17.16.0
2024-12	RAN#106	RP-243062	4990		F	(NR_redcap-Perf) CR to TS 38.133 on test cases for RedCap UE	17.16.0
2024-12	RAN#106	RP-243041	4992	2	F	(NR_ext_to_71GHz-Perf) CR to TS 38.133 on test cases in FR2-2 with CCA	17.16.0
2024-12	RAN#106	RP-243063	5001		F	(NR_RRM_enh2-Perf) CR on test cases of PUCCH SCell activation and deactivation delay requirements	17.16.0
2024-12	RAN#106	RP-243063	5003	1	F	(NR_RRM_enh2-Core) CR on PUCCH SCell activation and deactivation delay requirements with Multiple SCells	17.16.0
2024-12	RAN#106	RP-243061	5005	1	F	(NR_pos_enh-Perf) CR on test cases of R17 positioning	17.16.0
2024-12	RAN#106	RP-243054	5016		A	(NR_newRAT) Restoring SCell interruption requirement	17.16.0
2024-12	RAN#106	RP-243028	5019		A	(LTE_NR_DC_CA_enh) Removal of brackets for R16 SCell activation improvements	17.16.0
2024-12	RAN#106	RP-243028	5021	1	F	(LTE_NR_DC_enh2-Core) Removal of brackets for R17 SCell activation improvements	17.16.0
2024-12	RAN#106	RP-243055	5027		A	(NR_newRAT-Perf) CR to TS 38.133: Corrections to RRM FR2 test cases for high power classes (Rel 17)	17.16.0
2024-12	RAN#106	RP-243059	5029		F	(NR NTN_solutions-Perf) CR to TS 38.133: Corrections to NR NTN RRM test cases (Rel 17)	17.16.0
2024-12	RAN#106	RP-243060	5036		A	(NR_unlic-Perf) CR for NR-U TC correction (R17)	17.16.0
2024-12	RAN#106	RP-243060	5039		A	(NR_unlic-Perf) Missing idle-mode conditions for NR-U in 38.133 annex B (R17)	17.16.0
2024-12	RAN#106	RP-243055	5045		A	CR on MGTA 0.25ms for per-UE MG (Cat-A Rel-17)	17.16.0
2024-12	RAN#106	RP-243059	5047		F	CR on Fading for RLM and BFD-LR test cases (Cat-F Rel-17)	17.16.0
2024-12	RAN#106	RP-243028	5056	1	F	(LTE_NR_DC_enh2-Core) CR on alignment of RAN4 requirements with RAN2 procedures	17.16.0
2024-12	RAN#106	RP-243064	5065		A	(NR_UE_pow_sav-Core) CR on relaxed measurement in IDLE/INACTIVE mode	17.16.0
2024-12	RAN#106	RP-243064	5068		A	(NR_RRM_Enh-Perf) CR on adding Note in test parameter tables for multiple unknown SCells activation test case	17.16.0
2024-12	RAN#106	RP-243059	5072	1	F	(NR NTN_solutions-Perf) CR on correction of test parameters and requirements for TCs for inter-frequency cell reselection on FR1 NR NTN	17.16.0
2024-12	RAN#106	RP-243059	5079	1	F	(NR NTN_solutions-Core) Modify NR NTN cell re-selection measurement in RRC IDLE state.	17.16.0
2024-12	RAN#106	RP-243059	5081	1	F	(NR NTN_solutions-Core) Modify NR NTN on measurement and evaluation of serving cell .	17.16.0
2024-12	RAN#106	RP-243063	5082	1	F	(NR_redcap-Core) Modify CG-SDT requirements for RedCap.	17.16.0
2024-12	RAN#106	RP-243063	5091	1	F	(NR_redcap-Core)Correction on RedCap UE	17.16.0
2024-12	RAN#106	RP-243063	5093	1	F	(NR_RRM_enh2) Correction on TS 38.133: HO with PSCell	17.16.0

2024-12	RAN#106	RP-243055	5106		A	(NR_newRAT-Perf) Correction to RLM scheduling restriction test cases_R17	17.16.0
2024-12	RAN#106	RP-243034	5109		A	(NR_2step_RACH-Perf) Correction to 2-step RACH RRM RMCs and test cases_R17	17.16.0
2024-12	RAN#106	RP-243039	5112		A	(NR_CSIRS_L3meas-Perf) Correction to CSI-RS based mobility measurement test cases_R17	17.16.0
2024-12	RAN#106	RP-243062	5114	1	F	(NR_redcap-Perf) Correction to RedCap 2-step RACH RRM test cases_R17	17.16.0
2024-12	RAN#106	RP-243062	5116		F	(NR_redcap-Perf) Correction to RedCap measurement and radio link monitoring test cases_R17	17.16.0
2024-12	RAN#106	RP-243048	5136	1	F	(NR_MG_enh-Core) CR on RRM requirements with NCSG	17.16.0
2024-12	RAN#106	RP-243061	5138		F	(NR_pos_enh-Core) CR on Rel-17 positioning requirements	17.16.0
2024-12	RAN#106	RP-243059	5160	1	F	(NR_NTN_solutions-Core) CR on measurement requirements for NTN	17.16.0
2024-12	RAN#106	RP-243048	5162		F	(NR_MG_enh-Core) CR on measurement requirements for con-MG	17.16.0
2024-12	RAN#106	RP-243061	5193		A	(NR_pos-Perf) CAT-A CR to 38.133 (Release 17) on corrections to accuracy requirement for UE Rx-Tx measurement	17.16.0
2024-12	RAN#106	RP-243059	5209		F	[NR_NTN_solutions-Perf] Correction in derive parameters in A.14.4.2.4 and A.14.4.2.6	17.16.0

History

Document history		
V17.5.0	May 2022	Publication
V17.6.0	September 2022	Publication
V17.7.0	October 2022	Publication
V17.8.0	January 2023	Publication
V17.9.0	June 2023	Publication
V17.10.0	July 2023	Publication
V17.11.0	October 2023	Publication
V17.12.0	February 2024	Publication
V17.13.0	June 2024	Publication
V17.14.0	August 2024	Publication
V17.15.0	November 2024	Publication
V17.16.0	February 2025	Publication